



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

September 6, 2016

Rajant Corporation  
400 East King Street  
Malvern, PA 19335

Dear Keith Sullivan,

Enclosed is the EMC test report for compliance testing of the Rajant Corporation, Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module, tested to the requirements of Title 47 of the Code of Federal Regulations (CFR), Part 90 Subpart Z for Land Mobile Radio Services.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\Rajant Corporation\EMC88968-FCC90Z Rev. 6)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. This letter of transmittal is not a part of the attached report



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

### **Electromagnetic Compatibility Criteria Test Report**

For the

**Rajant Corporation  
Model Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module**

Tested under

**The FCC Verification Rules  
Contained in Title 47 of the CFR, Part 90, Subpart Z  
for Private Land Mobile Radio Services**

**MET Report: EMC88968-FCC90Z Rev. 6**

September 6, 2016

**Prepared For:  
Rajant Corporation  
400 East King Street  
Malvern, PA 19335**

**Prepared By:  
MET Laboratories, Inc.  
914 W. Patapsco Ave.  
Baltimore, MD 21230**



## Electromagnetic Compatibility Criteria Test Report

For the

**Rajant Corporation**  
**Model Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module**

Tested under

**The FCC Verification Rules**  
**Contained in Title 47 of the CFR, Part 90, Subpart Z**  
**for Private Land Mobile Radio Services**

**MET Report: EMC88968-FCC90Z Rev. 6**

Djed Mouada  
Electromagnetic Compatibility Lab

Arsalan Hasan  
Electromagnetic Compatibility Lab

Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is / is not capable of operation in accordance with the requirements of Part 90, Subpart Z of the FCC Rules under normal use and maintenance.

Asad Bajwa, Director  
Electromagnetic Compatibility Lab



## Report Status Sheet

| Revision | Report Date       | Reason for Revision                      |
|----------|-------------------|------------------------------------------|
| Ø        | May 18, 2016      | Initial Issue.                           |
| 1        | July 13, 2016     | Additional BW added to report.           |
| 2        | July 22, 2016     | Editorial corrections.                   |
| 3        | July 27, 2016     | Updated List of Plots.                   |
| 4        | August 24, 2016   | Editorial corrections.                   |
| 5        | September 2, 2016 | Engineer corrections.                    |
| 6        | September 6, 2016 | Corrections to EIRP table and added MPE. |

## Table of Contents

|                                                                                  |           |
|----------------------------------------------------------------------------------|-----------|
| <b>1. Executive Summary .....</b>                                                | <b>1</b>  |
| <b>1.1. Testing Summary .....</b>                                                | <b>2</b>  |
| <b>2. Equipment Configuration.....</b>                                           | <b>3</b>  |
| <b>2.1. Overview .....</b>                                                       | <b>4</b>  |
| <b>2.2. Test Site .....</b>                                                      | <b>5</b>  |
| <b>2.3. Description of Test Sample.....</b>                                      | <b>5</b>  |
| <b>2.4. Equipment Configuration.....</b>                                         | <b>5</b>  |
| <b>2.5. Support Equipment .....</b>                                              | <b>5</b>  |
| <b>2.6. Ports and Cabling Information .....</b>                                  | <b>6</b>  |
| <b>2.7. Mode of Operation .....</b>                                              | <b>6</b>  |
| <b>2.8. Method of Monitoring EUT Operation .....</b>                             | <b>6</b>  |
| <b>2.9. Modifications .....</b>                                                  | <b>6</b>  |
| <b>2.9.1. Modifications to EUT .....</b>                                         | <b>6</b>  |
| <b>2.9.2. Modifications to Test Standard .....</b>                               | <b>6</b>  |
| <b>2.10. Disposition of EUT .....</b>                                            | <b>6</b>  |
| <b>3. Electromagnetic Compatibility Criteria for Intentional Radiators .....</b> | <b>7</b>  |
| <b>3.1. Peak Power Output .....</b>                                              | <b>22</b> |
| <b>3.2. Occupied Bandwidth.....</b>                                              | <b>36</b> |
| <b>3.3. Spurious Emissions at Antenna Terminals .....</b>                        | <b>49</b> |
| <b>3.4. Radiated Emissions (Substitution Method).....</b>                        | <b>62</b> |
| <b>3.5. Frequency Stability .....</b>                                            | <b>78</b> |
| <b>4. Test Equipment .....</b>                                                   | <b>80</b> |
| <b>5. Certification Label &amp; User's Manual Information .....</b>              | <b>82</b> |
| <b>5.1. Verification Information .....</b>                                       | <b>83</b> |
| <b>5.2. Label and User's Manual Information .....</b>                            | <b>87</b> |

All references to section numbers are taken directly from the standard/specification used. Only sections requiring testing or evaluation are included.

## List of Tables

|                                              |    |
|----------------------------------------------|----|
| Table 1. Test Summary .....                  | 2  |
| Table 2. EUT Specifications .....            | 4  |
| Table 3. Equipment Configuration .....       | 5  |
| Table 4. Support Equipment.....              | 5  |
| Table 5. Ports and Cabling Information ..... | 6  |
| Table 6. Test Equipment .....                | 81 |

## List of Figures

|                                                                   |                                     |
|-------------------------------------------------------------------|-------------------------------------|
| Figure 1. Rajant EUT (Portable battery powered device) .....      | <b>Error! Bookmark not defined.</b> |
| Figure 2. PPSD Test Setup .....                                   | 22                                  |
| Figure 3. Occupied Bandwidth Test Setup .....                     | 36                                  |
| Figure 4. Spurious Emissions at Antenna Terminals Test Setup..... | 49                                  |

## List of Plots

|                                                                                            |    |
|--------------------------------------------------------------------------------------------|----|
| Plot 1. Measured Power - Low - 3663.4MHz - BW20MHz - Chain0 - 2dBi Antenna.....            | 10 |
| Plot 2. Measured Power - Low - 3663.4MHz - BW20MHz - Chain1 - 2dBi Antenna.....            | 10 |
| Plot 3. Measured Power - Mid - 3678.4MHz - BW20MHz - Chain0 - 2dBi Antenna .....           | 11 |
| Plot 4. Measured Power - Mid - 3678.4MHz - BW20MHz - Chain1 - 2dBi Antenna .....           | 11 |
| Plot 5. Measured Power - High - 3688.4MHz - BW20MHz - Chain0 - 2dBi Antenna .....          | 12 |
| Plot 6. Measured Power - High - 3688.4MHz - BW20MHz - Chain1 - 2dBi Antenna .....          | 12 |
| Plot 7. Measured Power - Low - 3655.9MHz - BW10MHz - Chain0 - 2dBi Antenna.....            | 13 |
| Plot 8. Measured Power - Low - 3655.9MHz - BW10MHz - Chain1 - 2dBi Antenna.....            | 13 |
| Plot 9. Measured Power - Mid - 3673.4MHz - BW10MHz - Chain0 - 2dBi Antenna .....           | 14 |
| Plot 10. Measured Power - Mid - 3673.4MHz - BW10MHz - Chain1 - 2dBi Antenna .....          | 14 |
| Plot 11. Measured Power - High - 3693.4MHz - BW10MHz - Chain0 - 2dBi Antenna.....          | 15 |
| Plot 12. Measured Power - High - 3693.4MHz - BW10MHz - Chain1 - 2dBi Antenna.....          | 15 |
| Plot 13. Measured Power - Low - 3663.4MHz - BW20MHz - Chain0 - 4dBi Antenna.....           | 16 |
| Plot 14. Measured Power - Low - 3663.4MHz - BW20MHz - Chain1 - 4dBi Antenna.....           | 16 |
| Plot 15. Measured Power - Mid - 3678.4MHz - BW20MHz - Chain0 - 4dBi Antenna .....          | 17 |
| Plot 16. Measured Power - Mid - 3678.4MHz - BW20MHz - Chain1 - 4dBi Antenna .....          | 17 |
| Plot 17. Measured Power - High - 3688.4MHz - BW20MHz - Chain0 - 4dBi Antenna .....         | 18 |
| Plot 18. Measured Power - High - 3688.4MHz - BW20MHz - Chain1 - 4dBi Antenna .....         | 18 |
| Plot 19. Measured Power - Low - 3655.9MHz - BW10MHz - Chain0 - 4dBi Antenna.....           | 19 |
| Plot 20. Measured Power - Low - 3655.9MHz - BW10MHz - Chain1 - 4dBi Antenna.....           | 19 |
| Plot 21. Measured Power - Mid - 3673.4MHz - BW10MHz - Chain0 - 4dBi Antenna .....          | 20 |
| Plot 22. Measured Power - Mid - 3673.4MHz - BW10MHz - Chain1 - 4dBi Antenna .....          | 20 |
| Plot 23. Measured Power - High - 3693.4MHz - BW10MHz - Chain0 - 4dBi Antenna.....          | 21 |
| Plot 24. Measured Power - High - 3693.4MHz - BW10MHz - Chain1 - 4dBi Antenna.....          | 21 |
| Plot 25. Power Spectral Density - Low - 3663.4MHz - BW20MHz - Chain0 - 2dBi Antenna.....   | 24 |
| Plot 26. Power Spectral Density - Low - 3663.4MHz - BW20MHz - Chain1 - 2dBi Antenna.....   | 24 |
| Plot 27. Power Spectral Density - Mid - 3678.4MHz - BW20MHz - Chain0 - 2dBi Antenna.....   | 25 |
| Plot 28. Power Spectral Density - Mid - 3678.4MHz - BW20MHz - Chain1 - 2dBi Antenna.....   | 25 |
| Plot 29. Power Spectral Density - High - 3688.4MHz - BW20MHz - Chain0 - 2dBi Antenna ..... | 26 |
| Plot 30. Power Spectral Density - High - 3688.4MHz - BW20MHz - Chain1 - 2dBi Antenna ..... | 26 |
| Plot 31. Power Spectral Density - Low - 3655.9MHz - BW10MHz - Chain0 - 2dBi Antenna.....   | 27 |
| Plot 32. Power Spectral Density - Low - 3655.9MHz - BW10MHz - Chain1 - 2dBi Antenna.....   | 27 |
| Plot 33. Power Spectral Density - Mid - 3673.4MHz - BW10MHz - Chain0 - 2dBi Antenna.....   | 28 |
| Plot 34. Power Spectral Density - Mid - 3673.4MHz - BW10MHz - Chain1 - 2dBi Antenna.....   | 28 |
| Plot 35. Power Spectral Density - High - 3693.4MHz - BW10MHz - Chain0 - 2dBi Antenna ..... | 29 |

|                                                                                             |    |
|---------------------------------------------------------------------------------------------|----|
| Plot 36. Power Spectral Density - High - 3693.4MHz - BW10MHz - Chain1 - 2dBi Antenna .....  | 29 |
| Plot 37. Power Spectral Density - Low - 3663.4MHz - BW20MHz - Chain0 - 4dBi Antenna .....   | 30 |
| Plot 38. Power Spectral Density - Low - 3663.4MHz - BW20MHz - Chain1 - 4dBi Antenna .....   | 30 |
| Plot 39. Power Spectral Density - Mid - 3678.4MHz - BW20MHz - Chain0 - 4dBi Antenna .....   | 31 |
| Plot 40. Power Spectral Density - Mid - 3678.4MHz - BW20MHz - Chain1 - 4dBi Antenna .....   | 31 |
| Plot 41. Power Spectral Density - High - 3688.4 MHz - BW20MHz - Chain0 - 4dBi Antenna ..... | 32 |
| Plot 42. Power Spectral Density - High - 3688.4MHz - BW20MHz - Chain1 - 4dBi Antenna .....  | 32 |
| Plot 43. Power Spectral Density - Low - 3655.9MHz - BW10MHz - Chain0 - 4dBi Antenna .....   | 33 |
| Plot 44. Power Spectral Density - Low - 3655.9MHz - BW10MHz - Chain1 - 4dBi Antenna .....   | 33 |
| Plot 45. Power Spectral Density - Mid - 3673.4MHz - BW10MHz - Chain0 - 4dBi Antenna .....   | 34 |
| Plot 46. Power Spectral Density - Mid - 3673.4MHz - BW10MHz - Chain1 - 4dBi Antenna .....   | 34 |
| Plot 47. Power Spectral Density - High - 3693.4MHz - BW10MHz - Chain0 - 4dBi Antenna .....  | 35 |
| Plot 48. Power Spectral Density - High - 3693.4MHz - BW10MHz - Chain1 - 4dBi Antenna .....  | 35 |
| Plot 49. Occupied Bandwidth - Low - 3663.4MHz - BW20MHz - Chain0 .....                      | 37 |
| Plot 50. Occupied Bandwidth - Low - 3663.4MHz - BW20MHz - Chain1 .....                      | 37 |
| Plot 51. Occupied Bandwidth - Mid - 3678.4MHz - BW20MHz - Chain0 .....                      | 38 |
| Plot 52. Occupied Bandwidth - Mid - 3678.4MHz - BW20MHz - Chain1 .....                      | 38 |
| Plot 53. Occupied Bandwidth - High - 3688.4MHz - BW20MHz - Chain0 .....                     | 39 |
| Plot 54. Occupied Bandwidth - High - 3688.4MHz - BW20MHz - Chain1 .....                     | 39 |
| Plot 55. Occupied Bandwidth - Low - 3655.9MHz - BW10MHz - Chain0 .....                      | 40 |
| Plot 56. Occupied Bandwidth - Low - 3655.9MHz - BW10MHz - Chain1 .....                      | 40 |
| Plot 57. Occupied Bandwidth - Mid - 3673.4MHz - BW10MHz - Chain0 .....                      | 41 |
| Plot 58. Occupied Bandwidth - Mid - 3673.4MHz - BW10MHz - Chain1 .....                      | 41 |
| Plot 59. Occupied Bandwidth - High - 3693.4MHz - BW10MHz - Chain0 .....                     | 42 |
| Plot 60. Occupied Bandwidth - High - 3693.4MHz - BW10MHz - Chain1 .....                     | 42 |
| Plot 61. Occupied Bandwidth - Low - 3663.4MHz - BW20MHz - Chain0 .....                      | 43 |
| Plot 62. Occupied Bandwidth - Low - 3663.4MHz - BW20MHz - Chain1 .....                      | 43 |
| Plot 63. Occupied Bandwidth - Mid - 3678.4MHz - BW20MHz - Chain0 .....                      | 44 |
| Plot 64. Occupied Bandwidth - Mid - 3678.4MHz - BW20MHz - Chain1 .....                      | 44 |
| Plot 65. Occupied Bandwidth - High - 3688.4MHz - BW20MHz - Chain0 .....                     | 45 |
| Plot 66. Occupied Bandwidth - High - 3688.4MHz - BW20MHz - Chain1 .....                     | 45 |
| Plot 67. Occupied Bandwidth - Low - 3655.9MHz - BW10MHz - Chain0 .....                      | 46 |
| Plot 68. Occupied Bandwidth - Low - 3655.9MHz - BW10MHz - Chain1 .....                      | 46 |
| Plot 69. Occupied Bandwidth - Mid - 3673.4MHz - BW10MHz - Chain0 .....                      | 47 |
| Plot 70. Occupied Bandwidth - Mid - 3673.4MHz - BW10MHz - Chain1 .....                      | 47 |
| Plot 71. Occupied Bandwidth - High - 3693.4MHz - BW10MHz - Chain0 .....                     | 48 |
| Plot 72. Occupied Bandwidth - High - 3693.4MHz - BW10MHz - Chain1 .....                     | 48 |
| Plot 73. Emission Mask - Low - 3663.4MHz - BW20MHz - Chain0 .....                           | 50 |
| Plot 74. Emission Mask - Low - 3663.4MHz - BW20MHz - Chain1 .....                           | 50 |
| Plot 75. Emission Mask - Mid - 3678.4MHz - BW20MHz - Chain0 .....                           | 51 |
| Plot 76. Emission Mask - Mid - 3678.4MHz - BW20MHz - Chain1 .....                           | 51 |
| Plot 77. Emission Mask - High - 3688.4MHz - BW20MHz - Chain0 .....                          | 52 |
| Plot 78. Emission Mask - High - 3688.4MHz - BW20MHz - Chain1 .....                          | 52 |
| Plot 79. Emission Mask - Low - 3655.9MHz - BW10MHz - Chain0 .....                           | 53 |
| Plot 80. Emission Mask - Low - 3655.9MHz - BW10MHz - Chain1 .....                           | 53 |
| Plot 81. Emission Mask - Mid - 3673.4MHz - BW10MHz - Chain0 .....                           | 54 |
| Plot 82. Emission Mask - Mid - 3673.4MHz - BW10MHz - Chain1 .....                           | 54 |
| Plot 83. Emission Mask - High - 3693.4MHz - BW10MHz - Chain0 .....                          | 55 |
| Plot 84. Emission Mask - High - 3693.4MHz - BW10MHz - Chain1 .....                          | 55 |
| Plot 85.. Conducted Spurious Emissions - Low - 3663.4MHz - BW20MHz - Chain0 .....           | 56 |
| Plot 86. Conducted Spurious Emissions - Low - 3663.4MHz - BW20MHz - Chain1 .....            | 56 |
| Plot 87. Conducted Spurious Emissions - Mid - 3678.4MHz - BW20MHz - Chain0 .....            | 57 |
| Plot 88. Conducted Spurious Emissions - Mid - 3678.4MHz - BW20MHz - Chain1 .....            | 57 |
| Plot 89. Conducted Spurious Emissions - High - 3688.4MHz - BW20MHz - Chain0 .....           | 58 |

|                                                                                   |    |
|-----------------------------------------------------------------------------------|----|
| Plot 90. Conducted Spurious Emissions - High - 3688.4MHz - BW20MHz - Chain1 ..... | 58 |
| Plot 91. Conducted Spurious Emissions - Low - 3655.9MHz - BW10MHz - Chain0 .....  | 59 |
| Plot 92. Conducted Spurious Emissions - Low - 3655.9MHz - BW10MHz - Chain1 .....  | 59 |
| Plot 93. Conducted Spurious Emissions - Mid - 3673.4MHz - BW10MHz - Chain0 .....  | 60 |
| Plot 94. Conducted Spurious Emissions - Mid - 3673.4MHz - BW10MHz - Chain1 .....  | 60 |
| Plot 95. Conducted Spurious Emissions - High - 3693.4MHz - BW10MHz - Chain0 ..... | 61 |
| Plot 96. Conducted Spurious Emissions - High - 3693.4MHz - BW10MHz - Chain1 ..... | 61 |
| Plot 97. Radiated Emissions, 20MHz BW, Low Channel, 30MHz-1GHz .....              | 63 |
| Plot 98. Radiated Emissions, 20MHz BW, Low Channel 1-18GHz .....                  | 63 |
| Plot 99. Spurious TX Emissions 20 MHz BW, Low Channel 18GHz - 40GHz .....         | 64 |
| Plot 100. Radiated Emissions, 20MHz BW, Mid Channel 30MHz-1GHz .....              | 65 |
| Plot 101. Radiated Emissions, 20MHz BW, Mid Channel 1-18GHz .....                 | 65 |
| Plot 102. Spurious TX Emissions 20 MHz BW, Mid Channel 18GHz - 40GHz .....        | 66 |
| Plot 103. Radiated Emissions, 20MHz BW, High Channel 30MHz-1GHz .....             | 67 |
| Plot 104. Radiated Emissions, 20MHz BW, High Channel 1-18GHz .....                | 67 |
| Plot 105. Spurious TX Emissions 20 MHz BW, High Channel 18GHz - 40GHz .....       | 68 |
| Plot 106. Radiated Emissions, 10MHz BW, Low Channel 30MHz-1GHz .....              | 69 |
| Plot 107. Radiated Emissions, 10MHz BW, Low Channel 1-18GHz .....                 | 69 |
| Plot 108. Spurious TX Emissions 10 MHz BW, Low Channel 18GHz - 40GHz .....        | 70 |
| Plot 109. Radiated Emissions 10MHz BW, Mid Channel 30MHz-1GHz .....               | 71 |
| Plot 110. Radiated Emissions, 10MHz BW, Mid Channel 1-18GHz .....                 | 71 |
| Plot 111. Spurious TX Emissions 10 MHz BW, Mid Channel 18GHz - 40GHz .....        | 72 |
| Plot 112. Radiated Emissions, 10MHz BW, High Channel 30MHz-1GHz .....             | 73 |
| Plot 113. Radiated Emissions, 10MHz BW, High Channel 1-18GHz .....                | 73 |
| Plot 114. Spurious TX Emissions 10 MHz BW, High Channel 18GHz - 40GHz .....       | 74 |

## List of Photographs

|                                                                            |    |
|----------------------------------------------------------------------------|----|
| Photograph 1. Radiated Emission Spurious Test Setup, Below 1 GHz .....     | 75 |
| Photograph 2. Radiated Emission Spurious Test Setup, 1 GHz – 18 GHz .....  | 76 |
| Photograph 3. Radiated Emission Spurious Test Setup, 18 GHz – 40 GHz ..... | 77 |



## List of Terms and Abbreviations

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| <b>AC</b>                    | <b>Alternating Current</b>                       |
| <b>ACF</b>                   | <b>Antenna Correction Factor</b>                 |
| <b>Cal</b>                   | <b>Calibration</b>                               |
| <b><i>d</i></b>              | <b>Measurement Distance</b>                      |
| <b>dB</b>                    | <b>Decibels</b>                                  |
| <b>dB<math>\mu</math>A</b>   | <b>Decibels above one microamp</b>               |
| <b>dB<math>\mu</math>V</b>   | <b>Decibels above one microvolt</b>              |
| <b>dB<math>\mu</math>A/m</b> | <b>Decibels above one microamp per meter</b>     |
| <b>dB<math>\mu</math>V/m</b> | <b>Decibels above one microvolt per meter</b>    |
| <b>DC</b>                    | <b>Direct Current</b>                            |
| <b>E</b>                     | <b>Electric Field</b>                            |
| <b>DSL</b>                   | <b>Digital Subscriber Line</b>                   |
| <b>ESD</b>                   | <b>Electrostatic Discharge</b>                   |
| <b>EUT</b>                   | <b>Equipment Under Test</b>                      |
| <b><i>f</i></b>              | <b>Frequency</b>                                 |
| <b>FCC</b>                   | <b>Federal Communications Commission</b>         |
| <b>GRP</b>                   | <b>Ground Reference Plane</b>                    |
| <b>H</b>                     | <b>Magnetic Field</b>                            |
| <b>HCP</b>                   | <b>Horizontal Coupling Plane</b>                 |
| <b>Hz</b>                    | <b>Hertz</b>                                     |
| <b>IEC</b>                   | <b>International Electrotechnical Commission</b> |
| <b>kHz</b>                   | <b>kilohertz</b>                                 |
| <b>kPa</b>                   | <b>kilopascal</b>                                |
| <b>kV</b>                    | <b>kilovolt</b>                                  |
| <b>LISN</b>                  | <b>Line Impedance Stabilization Network</b>      |
| <b>MHz</b>                   | <b>Megahertz</b>                                 |
| <b><math>\mu</math>H</b>     | <b>microhenry</b>                                |
| <b><math>\mu</math></b>      | <b>microfarad</b>                                |
| <b><math>\mu</math>s</b>     | <b>microseconds</b>                              |
| <b>NEBS</b>                  | <b>Network Equipment-Building System</b>         |
| <b>PRF</b>                   | <b>Pulse Repetition Frequency</b>                |
| <b>RF</b>                    | <b>Radio Frequency</b>                           |
| <b>RMS</b>                   | <b>Root-Mean-Square</b>                          |
| <b>TWT</b>                   | <b>Traveling Wave Tube</b>                       |
| <b>V/m</b>                   | <b>Volts per meter</b>                           |
| <b>VCP</b>                   | <b>Vertical Coupling Plane</b>                   |



# Executive Summary



## 1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 90, Subpart Z.

| Title 47 of the CFR, Part 90, Subpart Z, Reference and Test Description | Compliance / Comments |
|-------------------------------------------------------------------------|-----------------------|
| §90.1319(b) Policies governing the use of the 3650–3700 MHz band.       | Compliant             |
| §2.1046; §90.1321(c) RF Power Output                                    | Compliant             |
| §2.1046; §90.1321(c) Peak Power Spectral Density                        | Compliant             |
| §2.1049 Occupied Bandwidth                                              | Compliant             |
| §2.1051; §90.1323(a) Spurious Emissions at Antenna Terminals            | Compliant             |
| §2.1053; Radiated Spurious Emissions                                    | Compliant             |
| §90.210 Emissions Mask                                                  | Compliant             |
| Frequency Stability §2.1055, §90.213                                    | Compliant             |

**Table 1. Test Summary**



# Equipment Configuration



## 2. Equipment Configuration

### 2.1. Overview

MET Laboratories, Inc. was contracted by Rajant Corporation to perform testing on the Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Rajant Corporation., Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module.

An EMC evaluation to determine compliance of the Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module with the requirements of Part 90, Subpart Z, was conducted. (All references are to the most current version of Title 47 of the Code of Federal Regulations in effect). In accordance with §2.1033, the following data is presented in support of the Certification of the Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module. Rajant Corporation should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been **permanently** discontinued. The results obtained relate only to the item(s) tested.

|                                       |                                                         |                                                                          |              |
|---------------------------------------|---------------------------------------------------------|--------------------------------------------------------------------------|--------------|
| <b>Model(s) Tested:</b>               | Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module    |                                                                          |              |
| <b>Model(s) Covered:</b>              | Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module    |                                                                          |              |
| <b>EUT Specifications:</b>            | Primary Power: 12VDC Battery                            |                                                                          |              |
|                                       | FCC ID: VJA-F36NPRO                                     |                                                                          |              |
|                                       | Type of Modulations:                                    | OFDM                                                                     |              |
|                                       |                                                         | 2 dBi Antenna                                                            | 4 dBiAntenna |
|                                       | Max RF Output Power:<br>E.I.R.P                         | 28.6233 dBm                                                              | 29.9273 dBm  |
|                                       | Equipment Code:                                         | TNB                                                                      |              |
|                                       | EUT Frequency Ranges:                                   | 3663.4 MHz - 3688.4 MHz (20MHz BW)<br>3655.9 MHz - 3693.4 MHz (10MHz BW) |              |
| <b>Analysis:</b>                      | The results obtained relate only to the item(s) tested. |                                                                          |              |
| <b>Environmental Test Conditions:</b> | Temperature: 15-35° C                                   |                                                                          |              |
|                                       | Relative Humidity: 30-60%                               |                                                                          |              |
|                                       | Barometric Pressure: 860-1060 mbar                      |                                                                          |              |
| <b>Evaluated by:</b>                  | Arsalan Hasan                                           |                                                                          |              |
| <b>Report Date(s):</b>                | September 6, 2016                                       |                                                                          |              |

Table 2. EUT Specifications



## 2.2. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## 2.3. Description of Test Sample

The Rajant Corporation Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module, is a high powered radio module operating on 3663.4 MHz with integrated Lightning & ESD protection. The radio module is designed for reliable fixed, portable and bodyworn wireless data networking applications.

## 2.4. Equipment Configuration

| Ref. ID | Name / Description                                            | Model Number      | Part Number    |
|---------|---------------------------------------------------------------|-------------------|----------------|
| A       | Mini-PCI Radio                                                | F36N-PRO          | F36N-PRO       |
| B       | PC TEL 3.650 GHz Stubby Antenna w Integrated TNC(M) Connector | 75-100155-036_ODD | 75-100155-036  |
| C       | MP Antenna 3.65 GHz Omni                                      | 08-ANT-0980-NM    | 08-ANT-0980-NM |

Table 3. Equipment Configuration

## 2.5. Support Equipment

| Ref. ID | Name / Description          | Manufacturer  | Model Number             |
|---------|-----------------------------|---------------|--------------------------|
| D       | Modular Host                | Rajant        | ME4-Modular Host         |
| E       | Mini-PCI Extender, Short    | ADEXELEC      | MPCIFLEX-01, 3"          |
| F       | Mini-PCI Extender, Longer   | ADEXELEC      | MPCIFLEX-01, 5"          |
| G       | ABS Plastic Antenna Support | Rajant        | None, Custom Fabrication |
| H       | Test PC                     | Lenovo        | G50                      |
| P       | AC/DC Power Supply          | Laptop Supply | Lenovo                   |

Table 4. Support Equipment



## 2.6. Ports and Cabling Information

| Ref. ID | Port name on EUT | Cable Description or reason for no cable | Qty. | Length (m) | Shielded (Y/N) | Termination Box ID & Port ID |
|---------|------------------|------------------------------------------|------|------------|----------------|------------------------------|
| J       | Mini-PCI         | Connects EUT to Modular Host             | 1    | 8"         | NO             | --                           |
| K       | RF Chain 0       | EUT RF Chain 0 Output                    | 1    | 5"         | YES            | CH0                          |
| L       | RF CHAIN 1       | EUT RF Chain 1 Output                    | 1    | 5"         | YES            | CH1                          |
| M       | DATA+PWR         | POWER+DATA From AC/DC POE                | 1    | 360"       | YES            | --                           |
| N       | Data In          | Connects PC to POE input                 | 1    | 36"        | YES            | --                           |

Table 5. Ports and Cabling Information

## 2.7. Mode of Operation

The following radio modes will be evaluated 802.11n 2x2:2 MIMO and for 802.11a. In each mode, a data pattern with high duty cycle will be used to produce a nearly continuous signal at the radio outputs.

## 2.8. Method of Monitoring EUT Operation

Direct observation of the output on each RF chain is required to verify the operation of the radio in the intended mode.

## 2.9. Modifications

### 2.9.1. Modifications to EUT

No modifications were made to the EUT.

### 2.9.2. Modifications to Test Standard

No modifications were made to the EUT.

## 2.10. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Rajant Corporation upon completion of testing.



# Electromagnetic Compatibility Criteria for Intentional Radiators



### 3. Electromagnetic Compatibility RF Power Output Requirements

#### 3.1. RF Power Output

**Test Requirement(s):** §2.1046 and §90.1321 (c)

**Test Procedures:** A laptop was connected to EUT to control the RF power output and frequency. The EUT was directly connected to a Spectrum Analyzer with an attenuator in-between. The EUT power was adjusted to produce maximum output power as specified in the owner's manual. Measurements were performed at the low, mid and high channels for each of the EUT's bandwidths and modulations.

**Limits:** For mobile and portable stations the EIRP limit is 1W / 25MHz.

**Test Results:** Equipment complies with 90.1321(c) for mobile and portable Stations. The module may be used with two types of antennas; 2 dBi and a 4 dBi.

**Test Engineer(s):** Arsalan Hasan


**Test Date(s):** 6/29/2016




| 2dBi Antenna |    |                 |                       |                       |           |                  |            |             |
|--------------|----|-----------------|-----------------------|-----------------------|-----------|------------------|------------|-------------|
| Channel      | BW | Frequency (GHz) | Antenna 0 Power (dBm) | Antenna 1 Power (dBm) | Sum (dBm) | 2+10log(2) (dBi) | EIRP (dBm) | Limit (dBm) |
| Low          | 20 | 3.6634          | 17.84                 | 21.76                 | 23.238    | 5.010299957      | 28.2483    | 30          |
| Mid          | 20 | 3.6784          | <b>18.6</b>           | 21.67                 | 23.411    | 5.010299957      | 28.4213    | 30          |
| High         | 20 | 3.6884          | 19.04                 | 21.61                 | 23.523    | 5.010299957      | 28.5333    | 30          |
| Low          | 10 | 3.6559          | 18.15                 | 22.16                 | 23.613    | 5.010299957      | 28.6233    | 30          |
| Mid          | 10 | 3.6734          | 18.72                 | 21.88                 | 23.592    | 5.010299957      | 28.6023    | 30          |
| High         | 10 | 3.6934          | <b>19.68</b>          | 21.75                 | 23.847    | 5.010299957      | 28.8573    | 30          |
| 4dBi Antenna |    |                 |                       |                       |           |                  |            |             |
| Channel      | BW | Frequency (GHz) | Antenna 0 Power (dBm) | Antenna 1 Power (dBm) | Sum (dBm) | 4+10log(2) (dBi) | EIRP (dBm) | Limit (dBm) |
| Low          | 20 | 3.6634          | 18.17                 | 20.68                 | 22.614    | 7.010299957      | 29.6243    | 30          |
| Mid          | 20 | 3.6784          | 18.95                 | 20.69                 | 22.917    | 7.010299957      | 29.9273    | 30          |
| High         | 20 | 3.6884          | 19.36                 | 20.24                 | 22.833    | 7.010299957      | 29.8433    | 30          |
| Low          | 10 | 3.6559          | 17.96                 | 20.16                 | 22.208    | 7.010299957      | 29.2183    | 30          |
| Mid          | 10 | 3.6734          | <b>18.9</b>           | 20.65                 | 22.873    | 7.010299957      | 29.8833    | 30          |
| High         | 10 | 3.6934          | 18.48                 | 20.44                 | 22.58     | 7.010299957      | 29.5903    | 30          |

Table 6. RF Output Power, Test Results


### RF Output Power for 2dBi Antenna (20MHz Bandwidth)

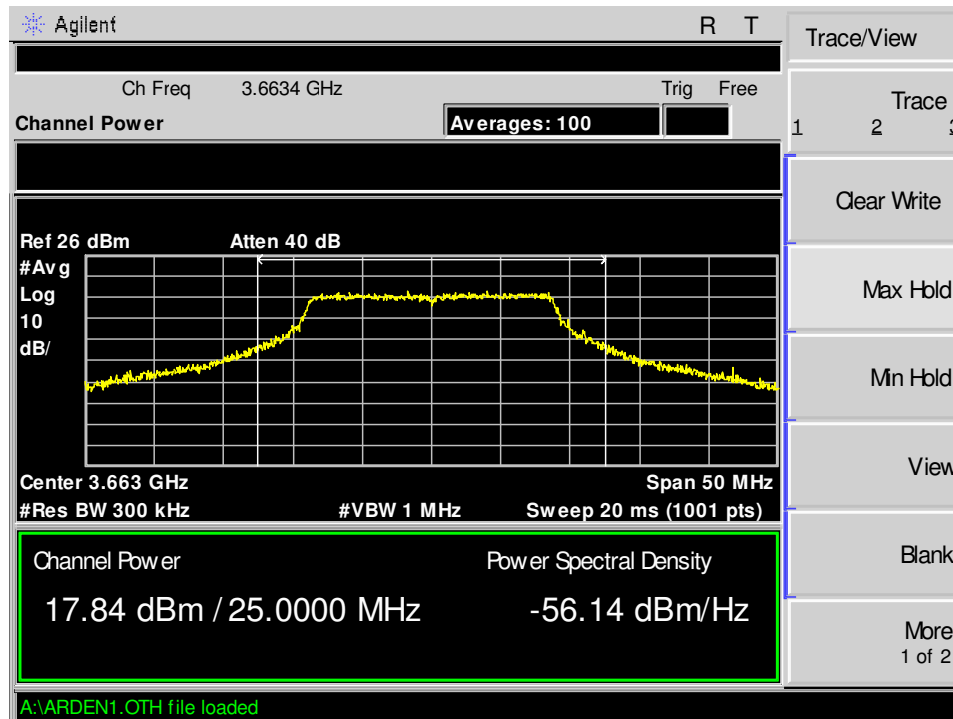


Plot 1. Measured Power - Low - 3663.4MHz - BW20MHz - Chain0 - 2dBi Antenna

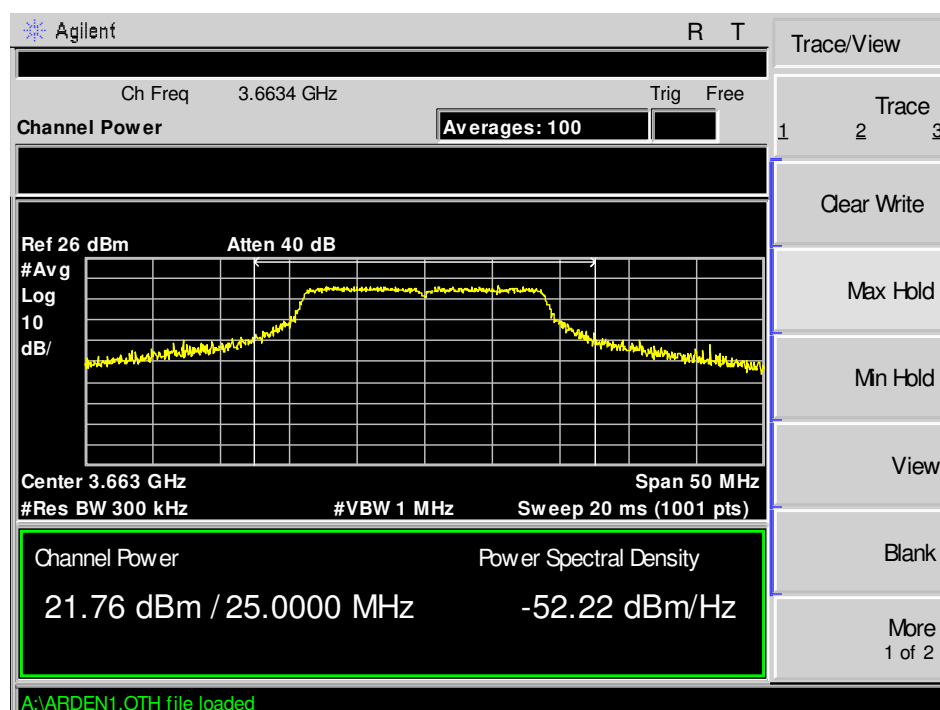


Plot 2. Measured Power - Low - 3663.4MHz - BW20MHz - Chain1 - 2dBi Antenna

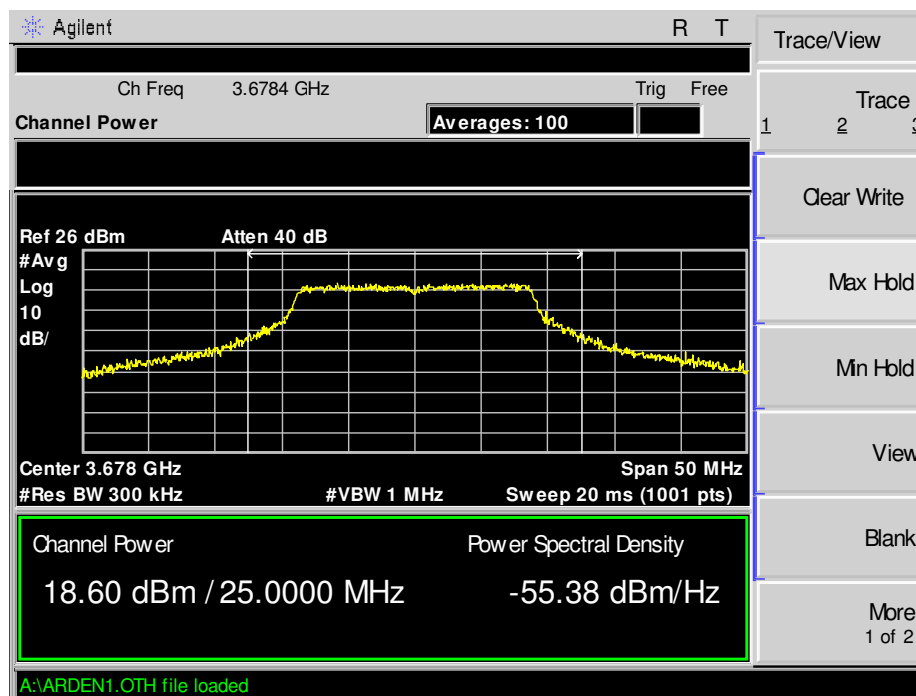


Plot 3. Measured Power - Mid - 3678.4MHz - BW20MHz - Chain0 - 2dBi Antenna

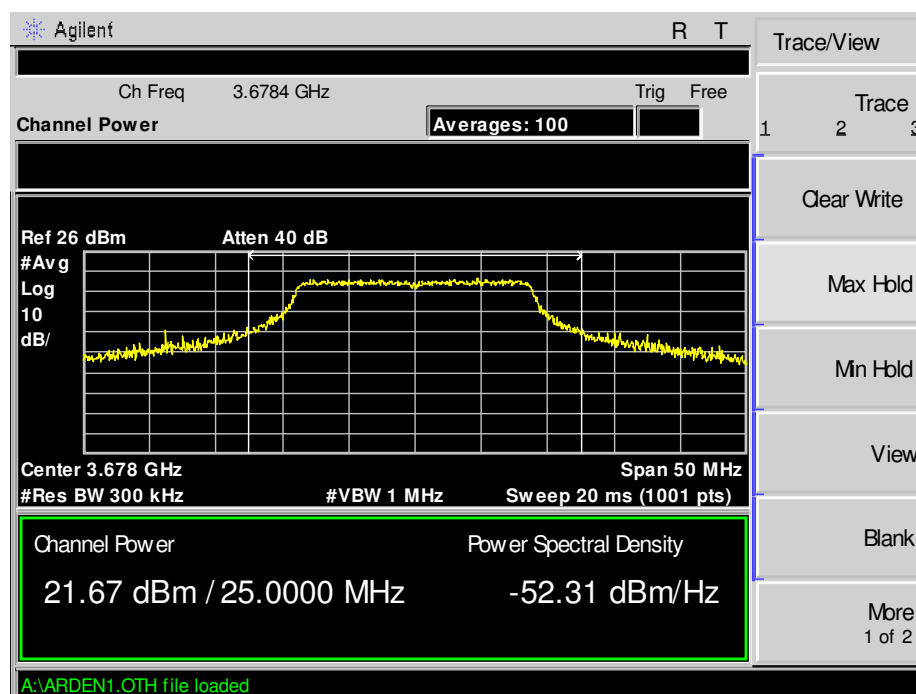

Plot 4. Measured Power - Mid - 3678.4MHz - BW20MHz - Chain1 - 2dBi Antenna

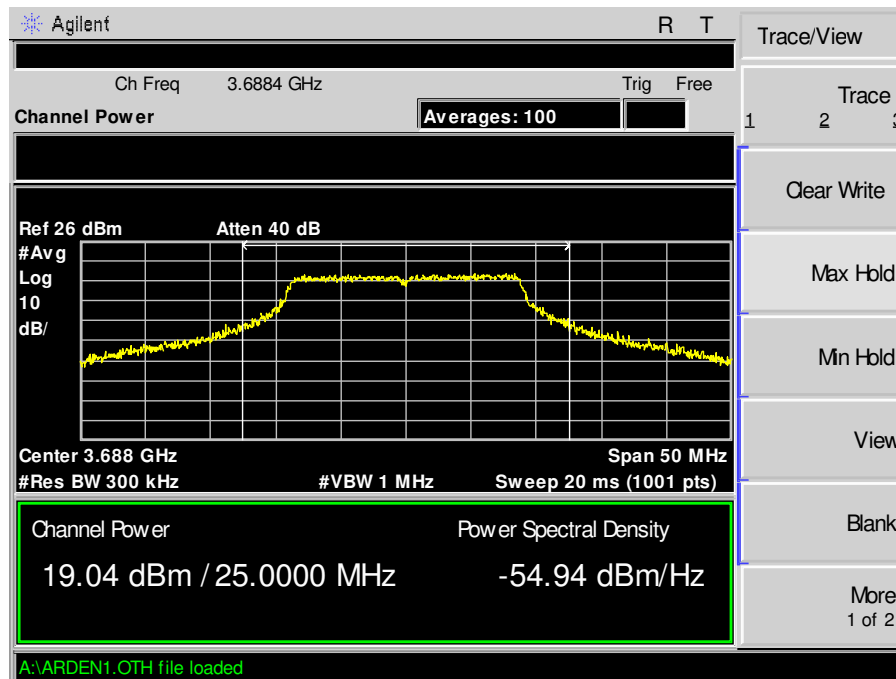


Plot 5. Measured Power - High - 3688.4MHz - BW20MHz - Chain0 - 2dBi Antenna

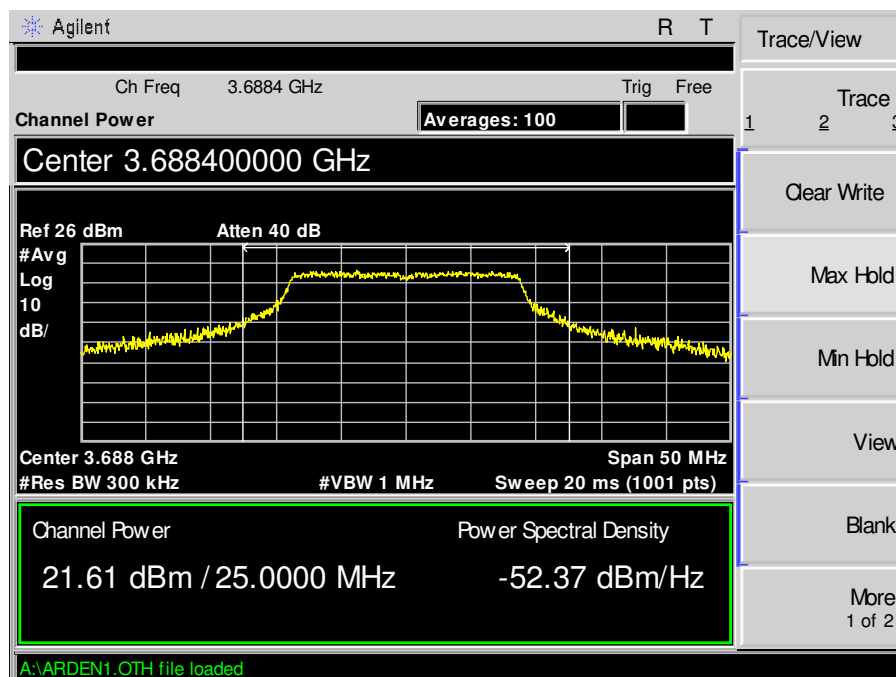


Plot 6. Measured Power - High - 3688.4MHz - BW20MHz - Chain1 - 2dBi Antenna


### RF Output Power for 2dBi Antenna (10MHz Bandwidth)

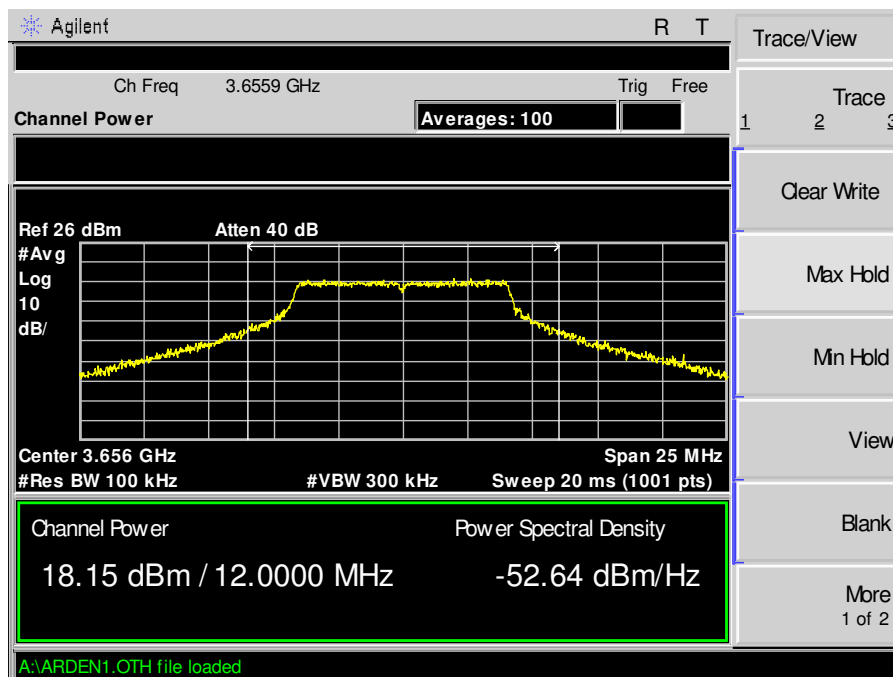


Plot 7. Measured Power - Low - 3655.9MHz - BW10MHz - Chain0 - 2dBi Antenna

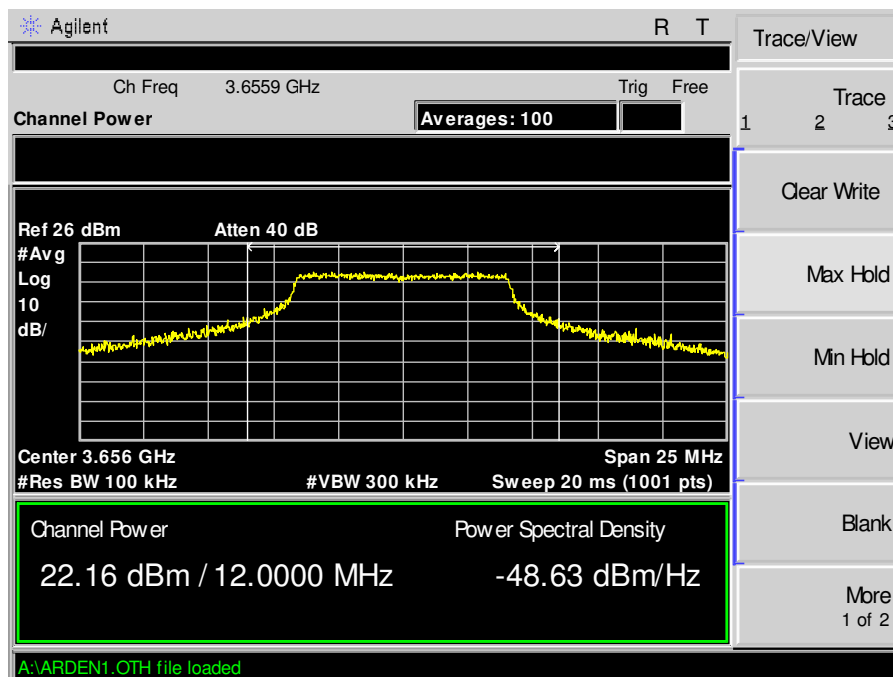


Plot 8. Measured Power - Low - 3655.9MHz - BW10MHz - Chain1 - 2dBi Antenna

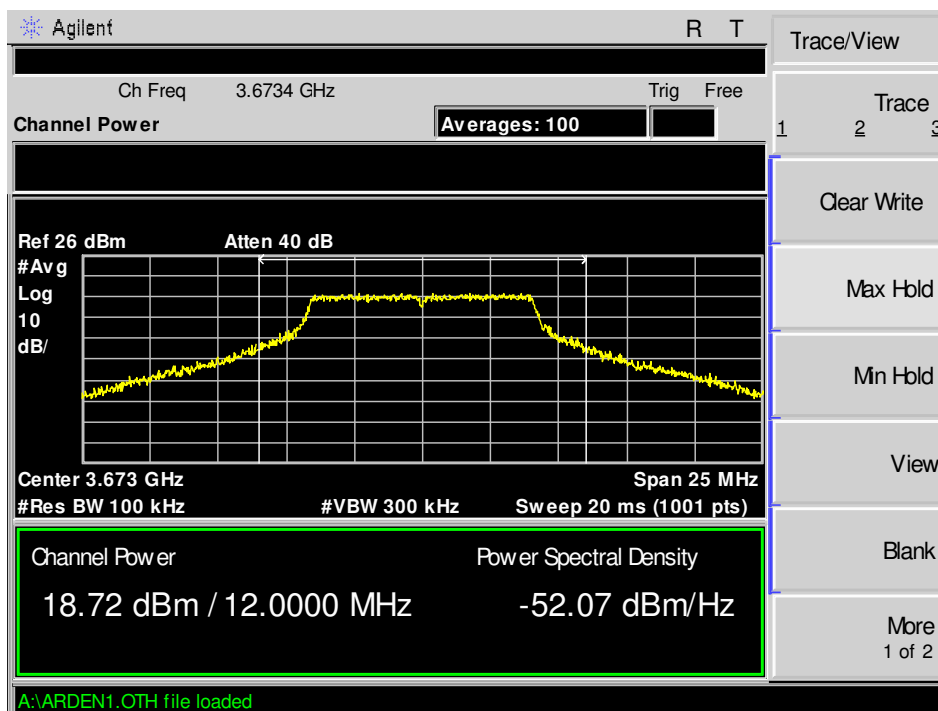


Plot 9. Measured Power - Mid - 3673.4MHz - BW10MHz - Chain0 - 2dBi Antenna

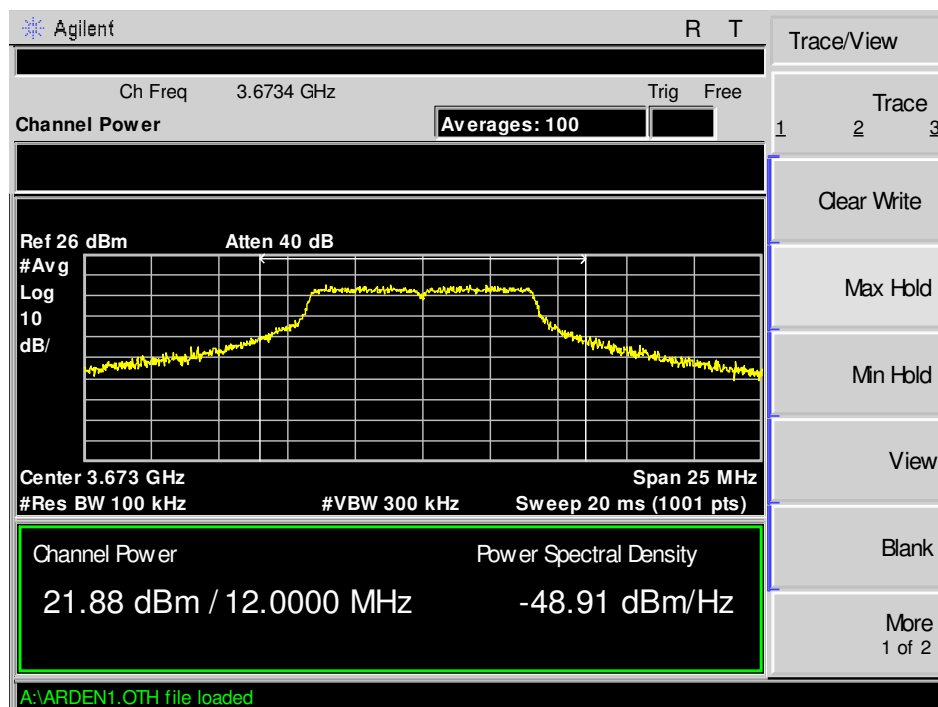

Plot 10. Measured Power - Mid - 3673.4MHz - BW10MHz - Chain1 - 2dBi Antenna

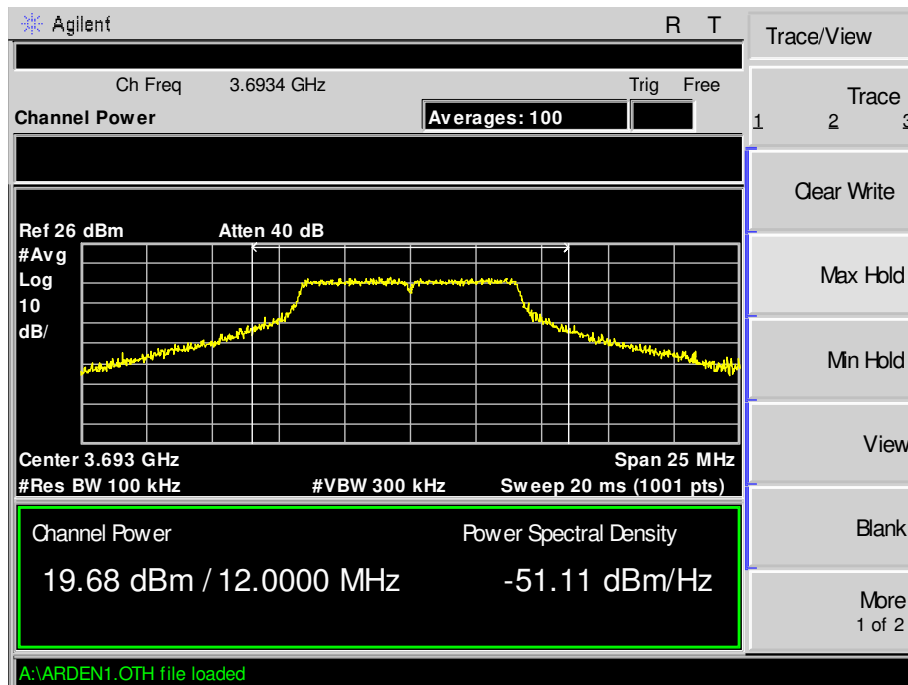


Plot 11. Measured Power - High - 3693.4MHz - BW10MHz - Chain0 - 2dBi Antenna

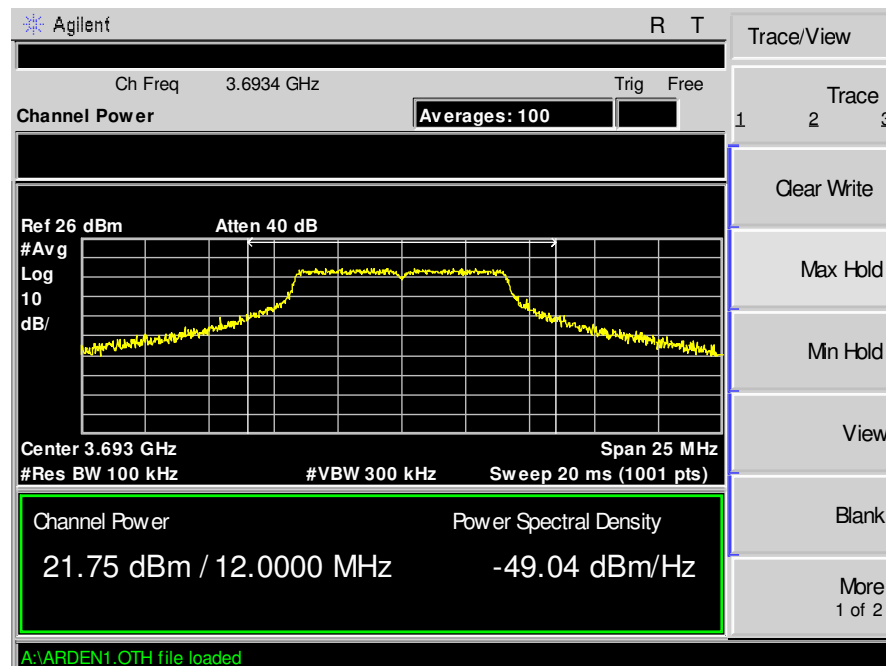


Plot 12. Measured Power - High - 3693.4MHz - BW10MHz - Chain1 - 2dBi Antenna


### RF Output Power for 4dBi Antenna (20MHz Bandwidth)

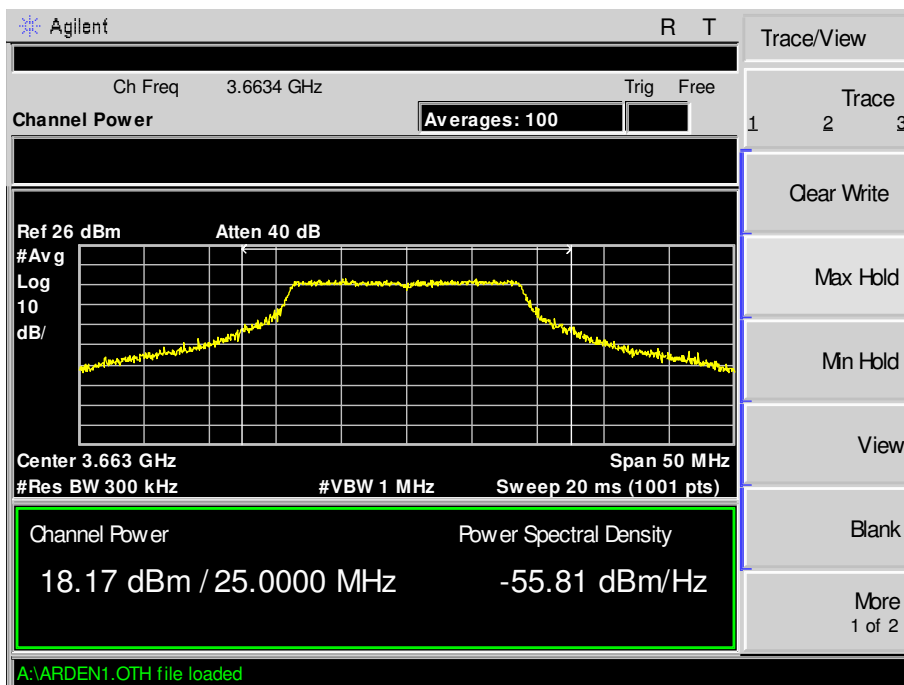


Plot 13. Measured Power - Low - 3663.4MHz - BW20MHz - Chain0 - 4dBi Antenna

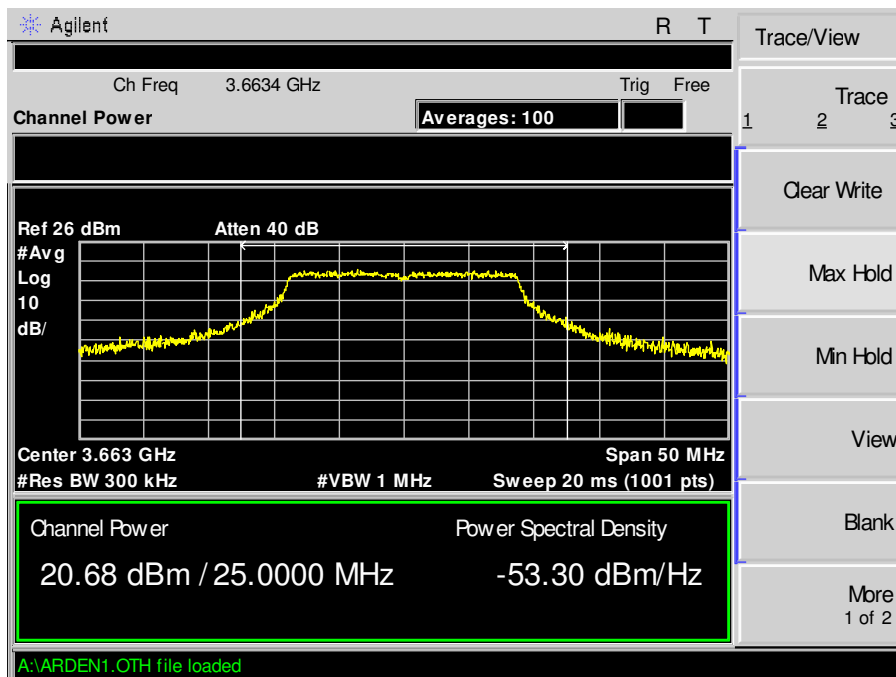


Plot 14. Measured Power - Low - 3663.4MHz - BW20MHz - Chain1 - 4dBi Antenna

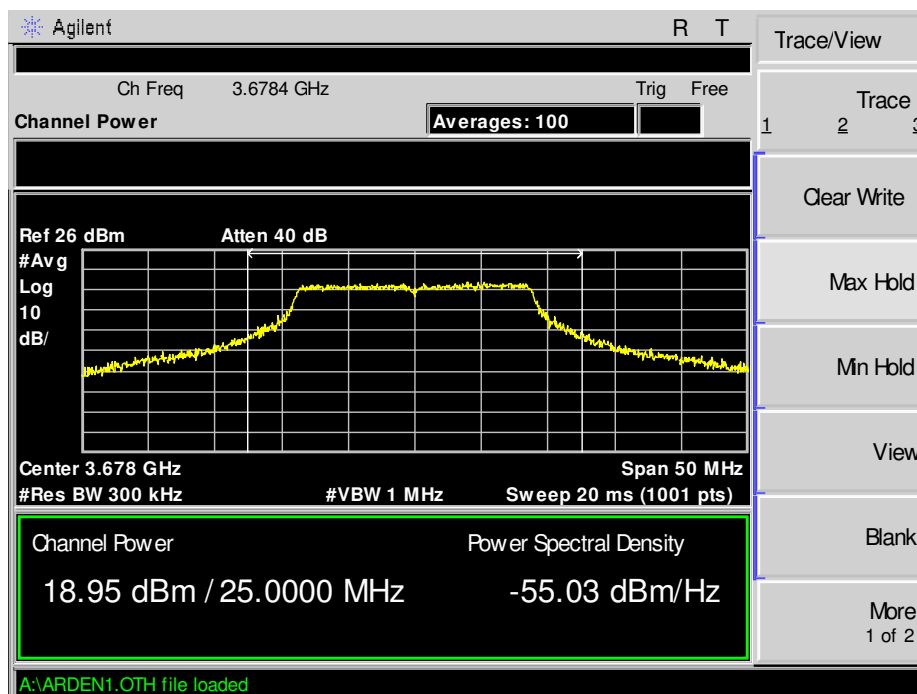


Plot 15. Measured Power - Mid - 3678.4MHz - BW20MHz - Chain0 - 4dBi Antenna

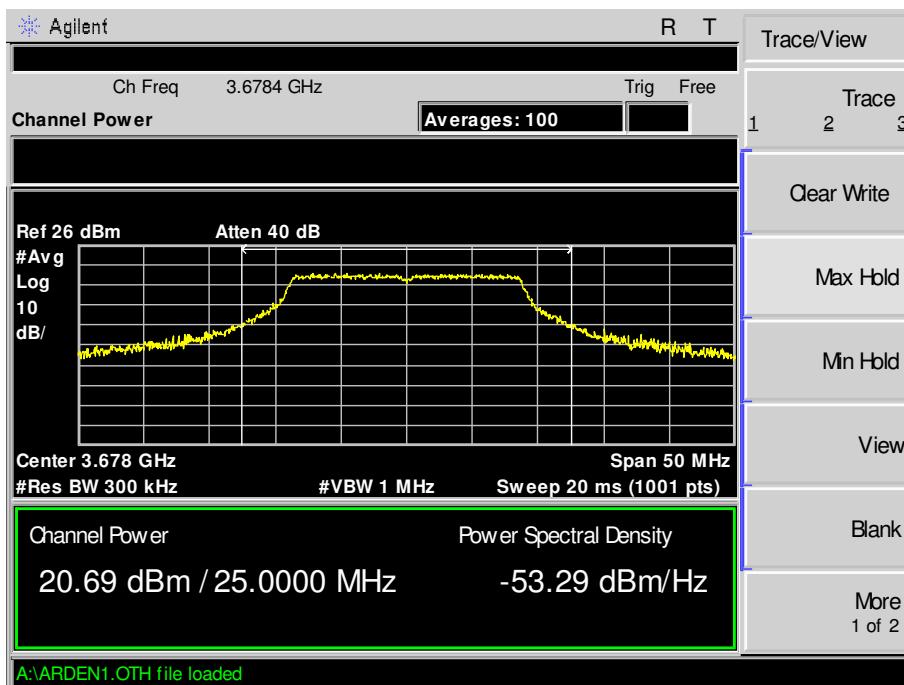

Plot 16. Measured Power - Mid - 3678.4MHz - BW20MHz - Chain1 - 4dBi Antenna

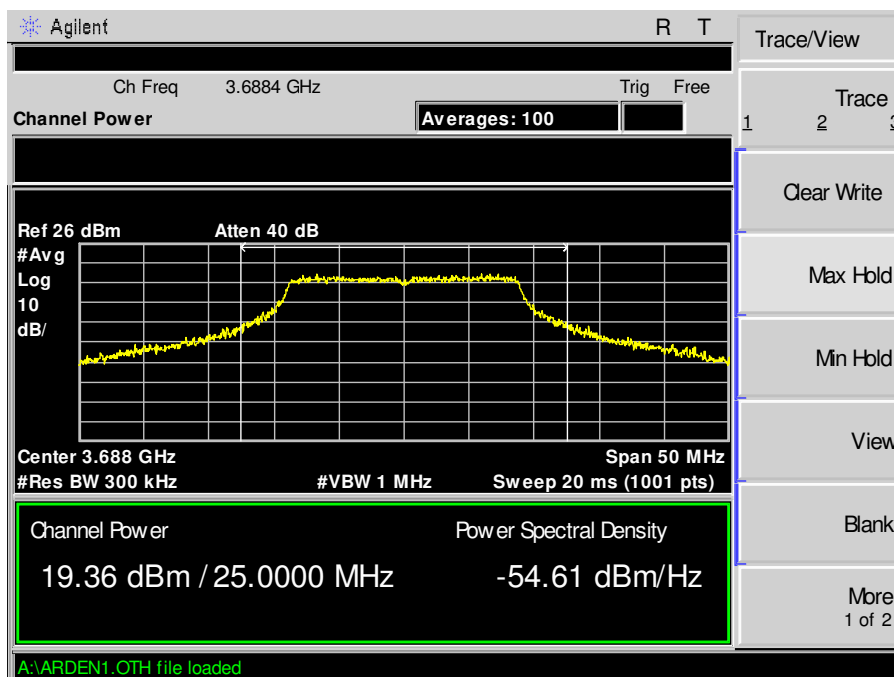


Plot 17. Measured Power - High - 3688.4MHz - BW20MHz - Chain0 - 4dBi Antenna

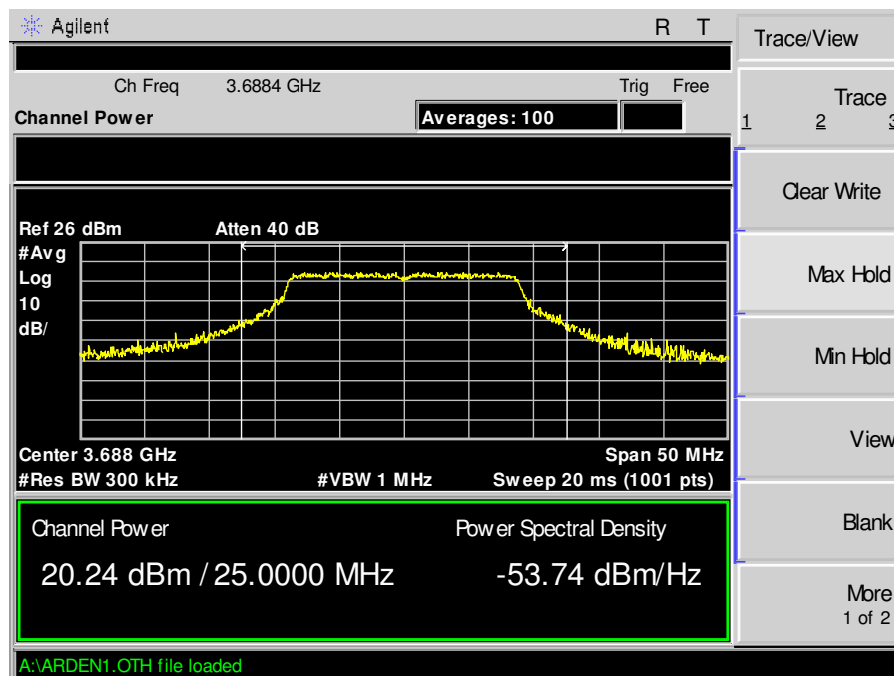


Plot 18. Measured Power - High - 3688.4MHz - BW20MHz - Chain1 - 4dBi Antenna


### RF Output Power for 4dBi Antenna (10MHz Bandwidth)

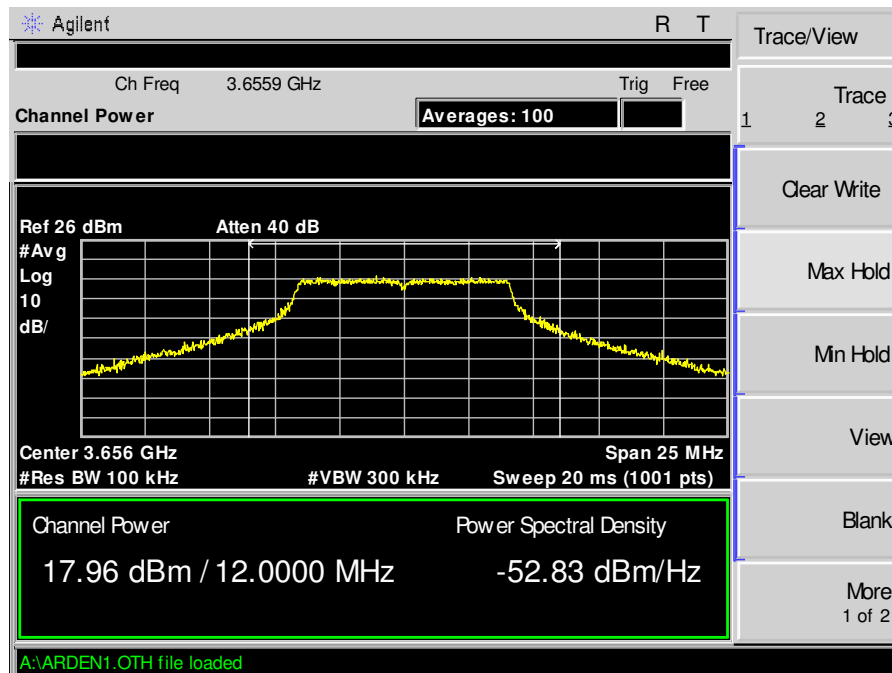


Plot 19. Measured Power - Low - 3655.9MHz - BW10MHz - Chain0 - 4dBi Antenna

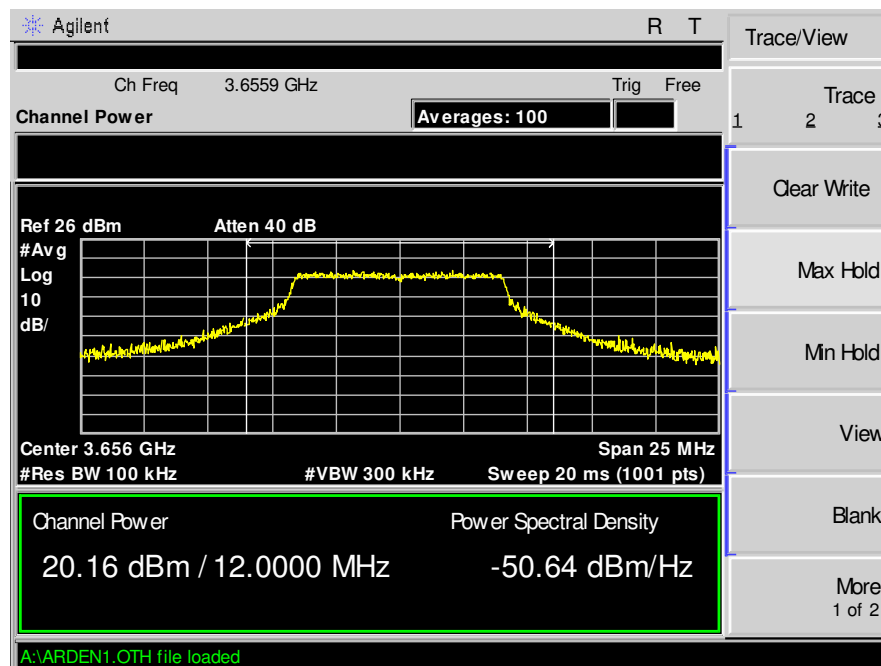


Plot 20. Measured Power - Low - 3655.9MHz - BW10MHz - Chain1 - 4dBi Antenna

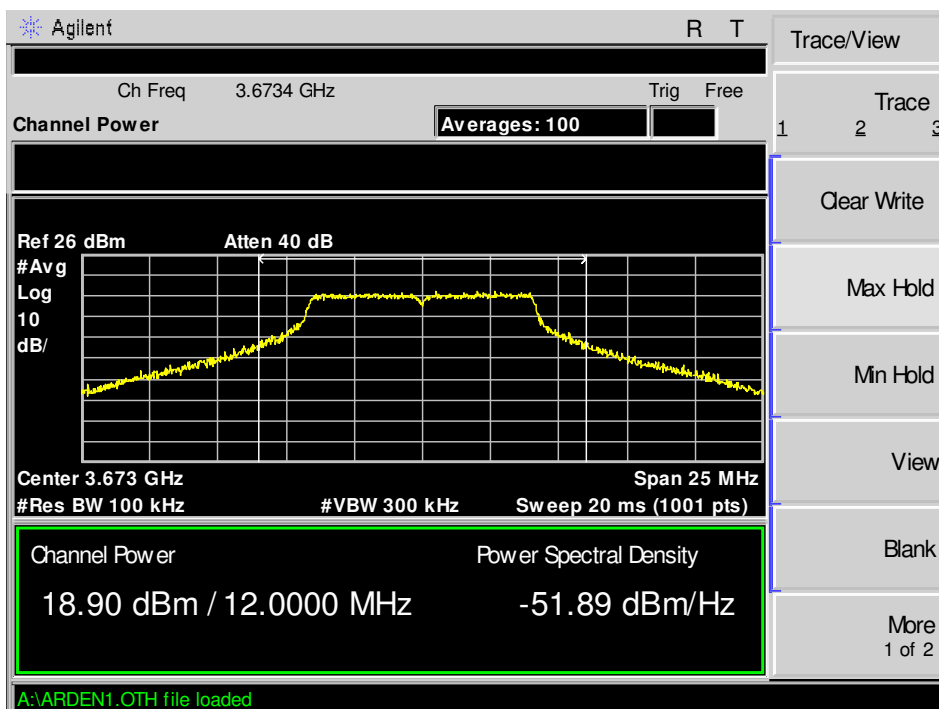


Plot 21. Measured Power - Mid - 3673.4MHz - BW10MHz - Chain0 - 4dBi Antenna

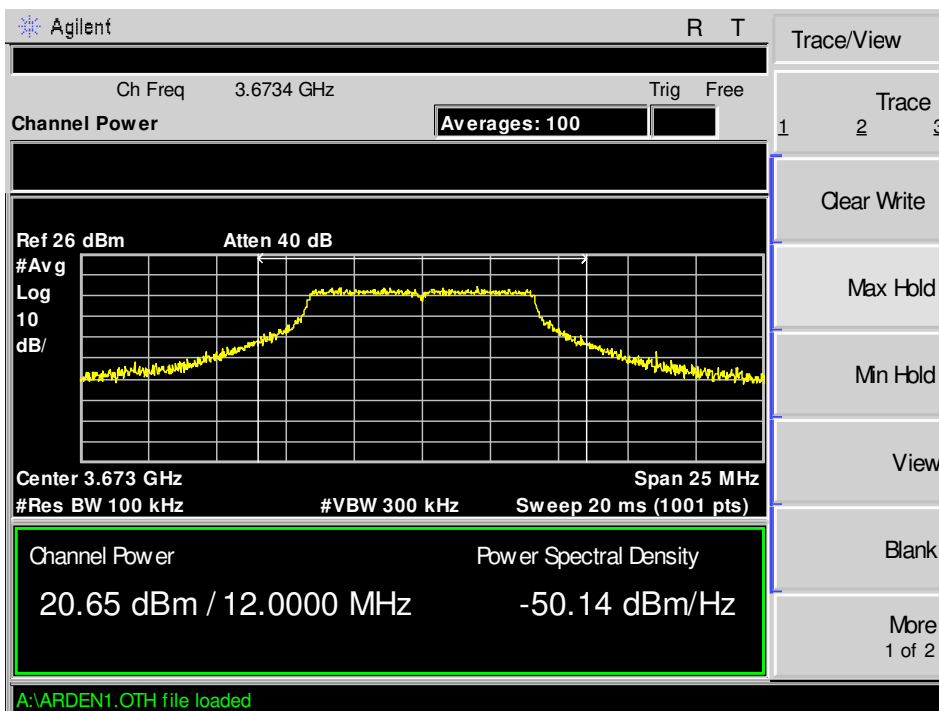

Plot 22. Measured Power - Mid - 3673.4MHz - BW10MHz - Chain1 - 4dBi Antenna

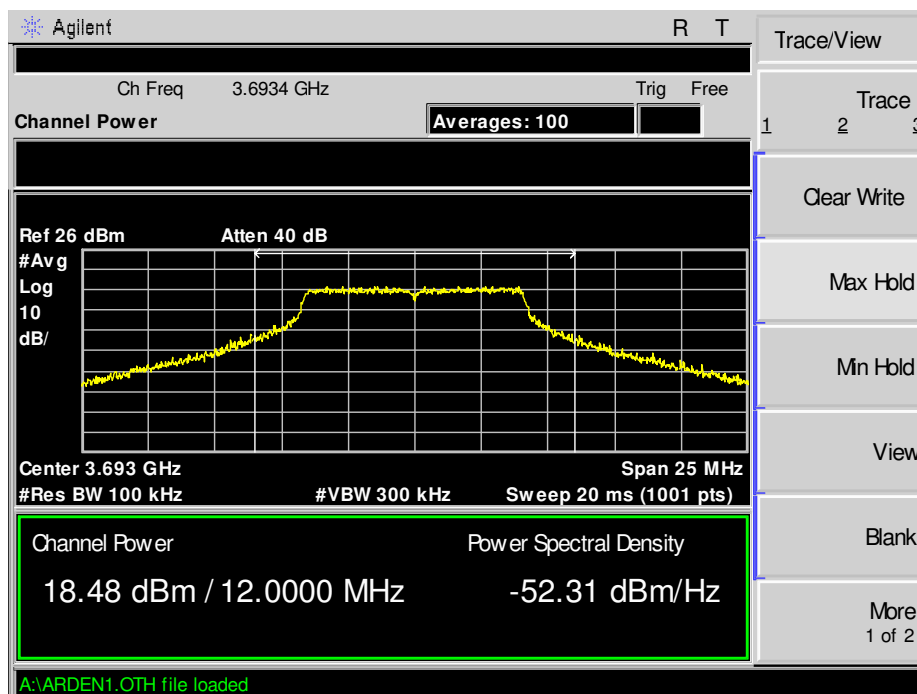

Plot 23. Measured Power - High - 3693.4MHz - BW10MHz - Chain0 - 4dBi Antenna

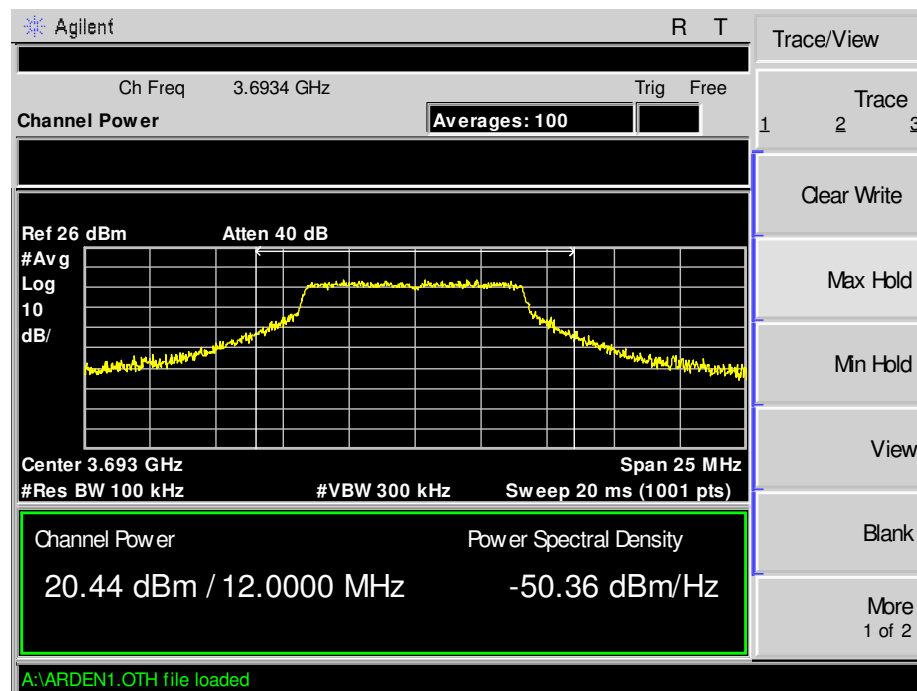

Plot 24. Measured Power - High - 3693.4MHz - BW10MHz - Chain1 - 4dBi Antenna

### 3.2. Peak Power Spectral Density

**Test Requirement(s):** §90.1321 (c)


**Test Procedures:** laptop was connected to EUT to control the RF power output and frequency. The EUT was directly connected to a Spectrum Analyzer with an attenuator inserted in between. The Spectrum Analyzer was set to a RBW = 1 MHz and a VBW > 1MHz. A sample detector was selected on the spectrum analyzer along with power averaging. The Peak Power Spectral Density was determined by detecting the highest emission within the EUT's occupied bandwidth. Measurements were performed at the low, mid and high channels for each of the EUT's bandwidths and modulations.

**Limits:** For mobile and portable stations the radiated Peak Power Spectral Density limit is 16dBm or 40mW

**Test Results:** Equipment complies with 90.1321(c) for mobile and portable Stations.

**Test Engineer(s):** Arsalan Hasan

**Test Date(s):** 6/29/2016

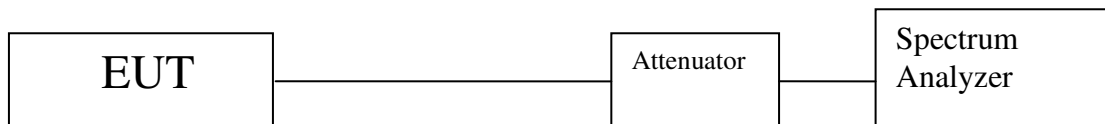


**Figure 1. PPSD Test Setup**




| 2dBi    |    |                 |                     |                     |           |                  |           |             |
|---------|----|-----------------|---------------------|---------------------|-----------|------------------|-----------|-------------|
| Channel | BW | Frequency (GHz) | Antenna 0 PSD (dBm) | Antenna 1 PSD (dBm) | Sum (dBm) | 2+10log(2) (dBi) | PSD (dBm) | Limit (dBm) |
| Low     | 20 | 3.6634          | 8.053               | 7.395               | 10.747    | 5.010299957      | 15.7573   | 16          |
| Mid     | 20 | 3.6784          | 7.525               | 7.466               | 10.506    | 5.010299957      | 15.5163   | 16          |
| High    | 20 | 3.6884          | 7.915               | 7.531               | 10.738    | 5.010299957      | 15.7483   | 16          |
| Low     | 10 | 3.6559          | 7.987               | 7.234               | 10.637    | 5.010299957      | 15.6473   | 16          |
| Mid     | 10 | 3.6734          | 8.292               | 7.171               | 10.778    | 5.010299957      | 15.7883   | 16          |
| High    | 10 | 3.6934          | 8.286               | 7.302               | 10.832    | 5.010299957      | 15.8423   | 16          |
| 4dBi    |    |                 |                     |                     |           |                  |           |             |
| Channel | BW | Frequency (GHz) | Antenna 0 PSD (dBm) | Antenna 1 PSD (dBm) | Sum (dBm) | 4+10log(2) (dBi) | PSD (dBm) | Limit (dBm) |
| Low     | 20 | 3.6634          | 5.803               | 5.331               | 8.584     | 7.010299957      | 15.5943   | 16          |
| Mid     | 20 | 3.6784          | 5.758               | 5.203               | 8.5       | 7.010299957      | 15.5103   | 16          |
| High    | 20 | 3.6884          | 6.168               | 5.621               | 8.913     | 7.010299957      | 15.9233   | 16          |
| Low     | 10 | 3.6559          | 6.125               | 5.434               | 8.804     | 7.010299957      | 15.8143   | 16          |
| Mid     | 10 | 3.6734          | 6.239               | 5.574               | 8.93      | 7.010299957      | 15.9403   | 16          |
| High    | 10 | 3.6934          | 5.728               | 5.257               | 8.509     | 7.010299957      | 15.5193   | 16          |

Table 7. Peak Power Spectral Density, Test Results


**Power Spectral Density (2dBi Antenna) (20MHz)**

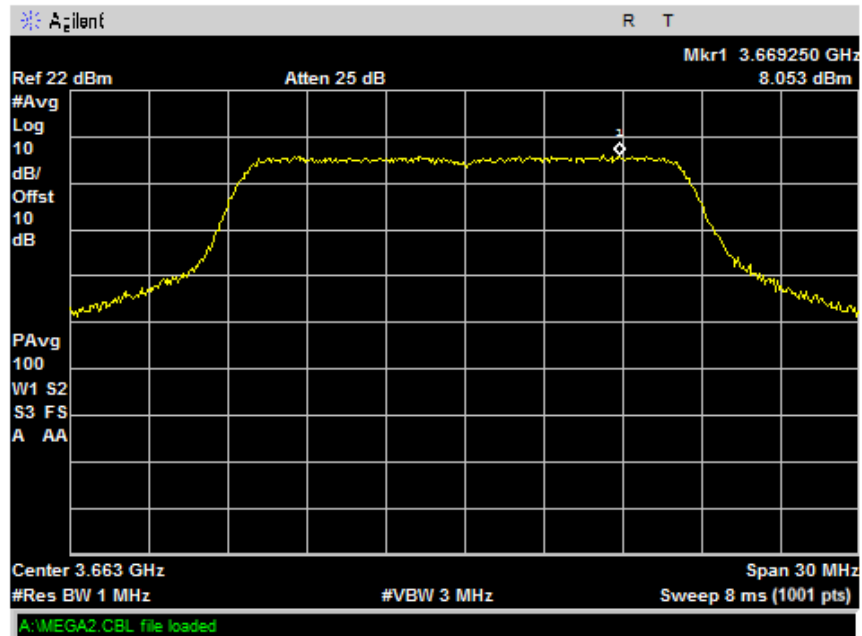


**Plot 25. Power Spectral Density - Low - 3663.4MHz - BW20MHz - Chain0 - 2dBi Antenna**

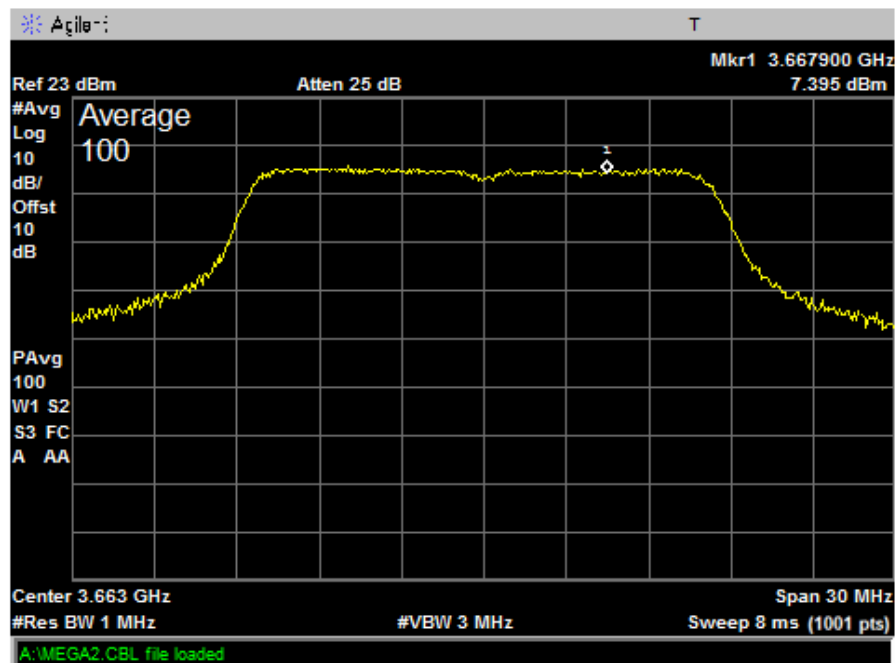


**Plot 26. Power Spectral Density - Low - 3663.4MHz - BW20MHz - Chain1 - 2dBi Antenna**

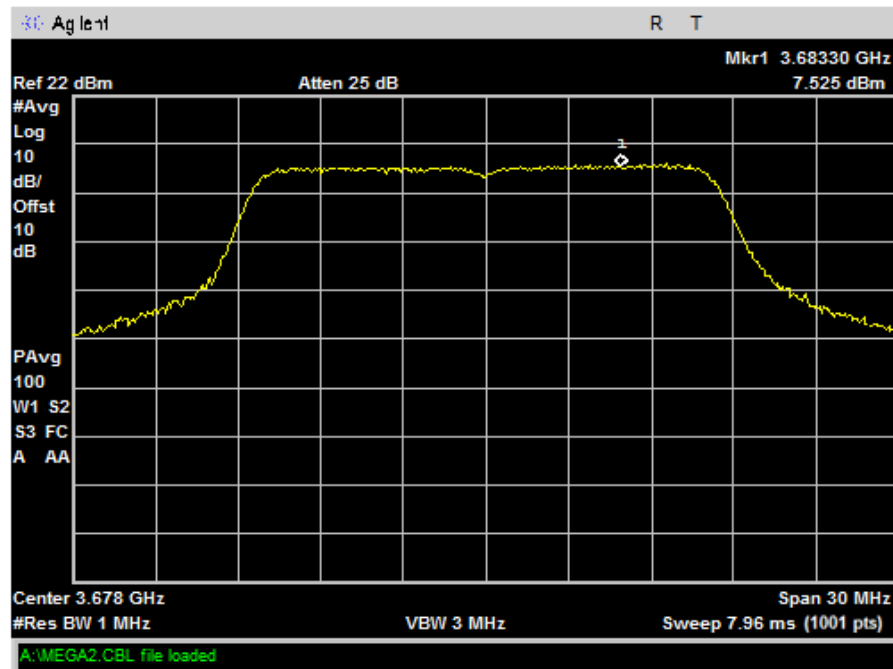


Plot 27. Power Spectral Density - Mid - 3678.4MHz - BW20MHz - Chain0 - 2dBi Antenna

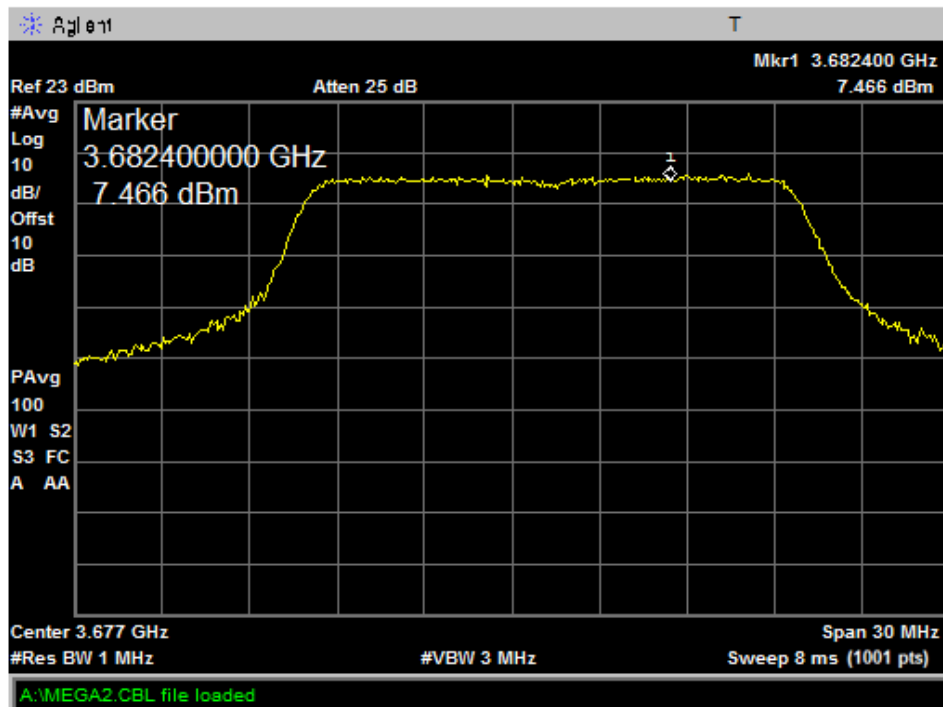

Plot 28. Power Spectral Density - Mid - 3678.4MHz - BW20MHz - Chain1 - 2dBi Antenna

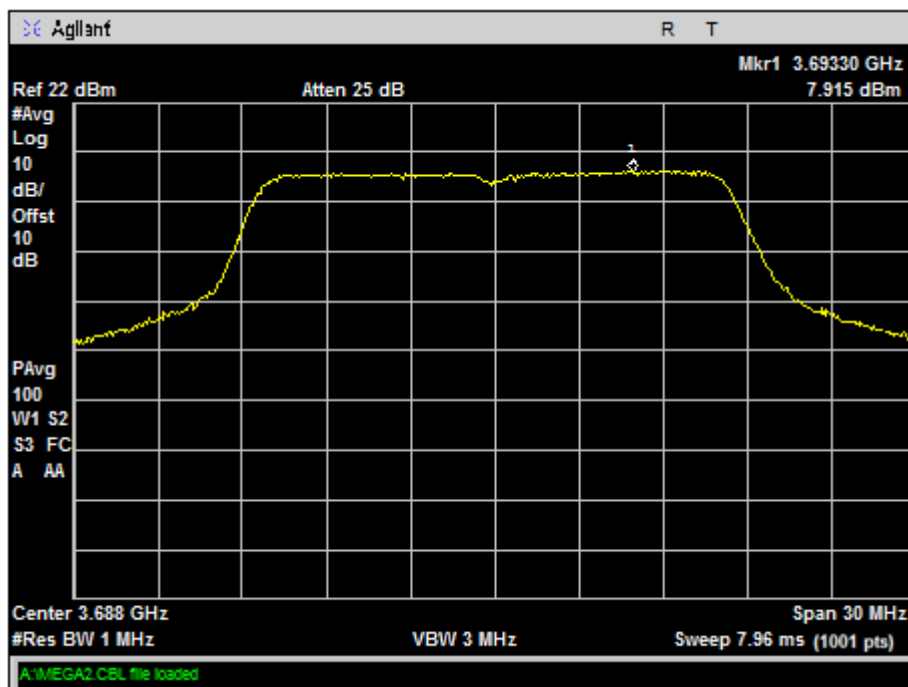


Plot 29. Power Spectral Density - High - 3688.4MHz - BW20MHz - Chain0 - 2dBi Antenna

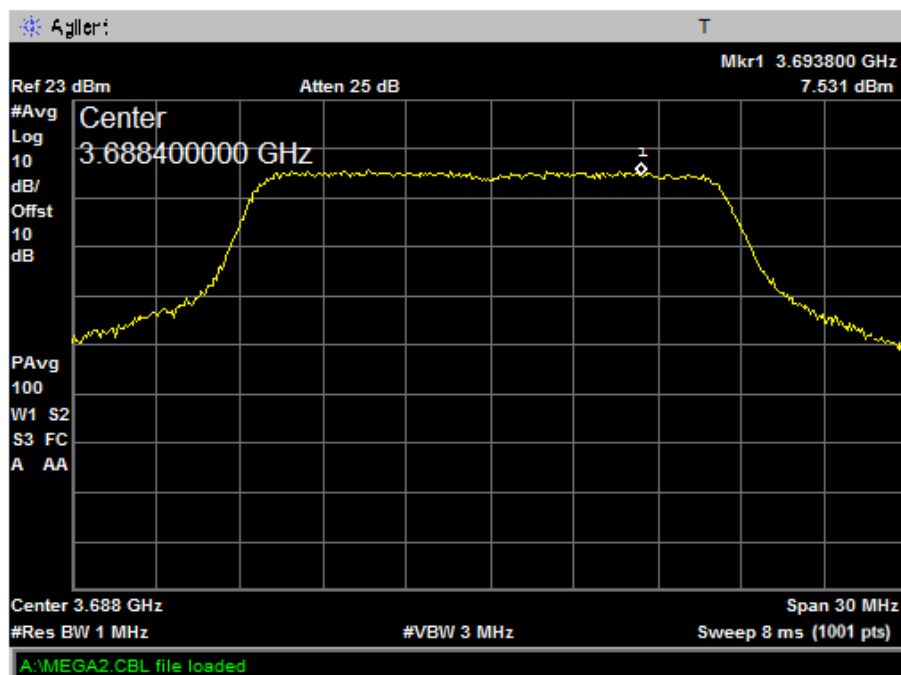


Plot 30. Power Spectral Density - High - 3688.4MHz - BW20MHz - Chain1 - 2dBi Antenna


## Power Spectral Density (2dBi Antenna) (10MHz)

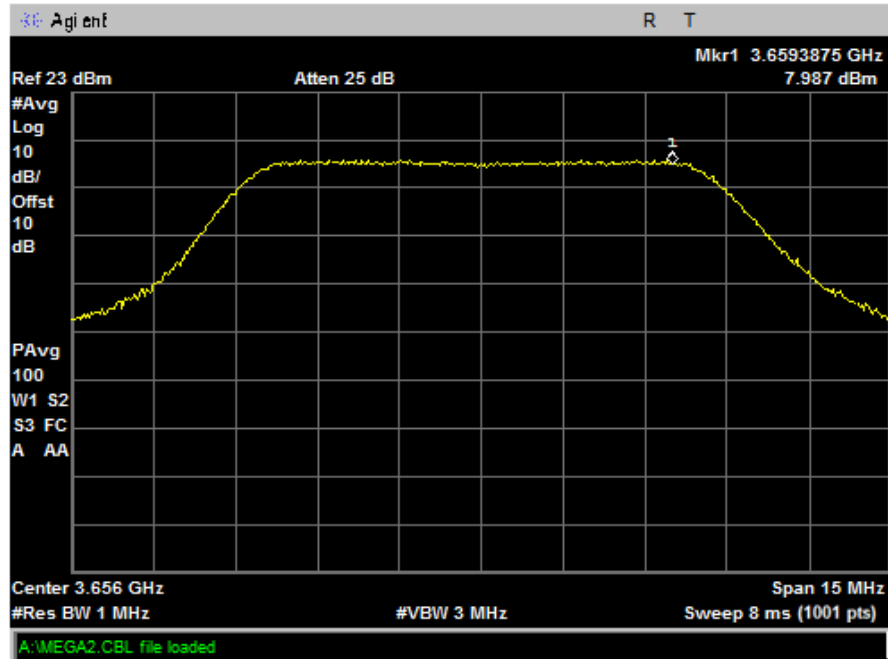


Plot 31. Power Spectral Density - Low - 3655.9MHz - BW10MHz - Chain0 - 2dBi Antenna

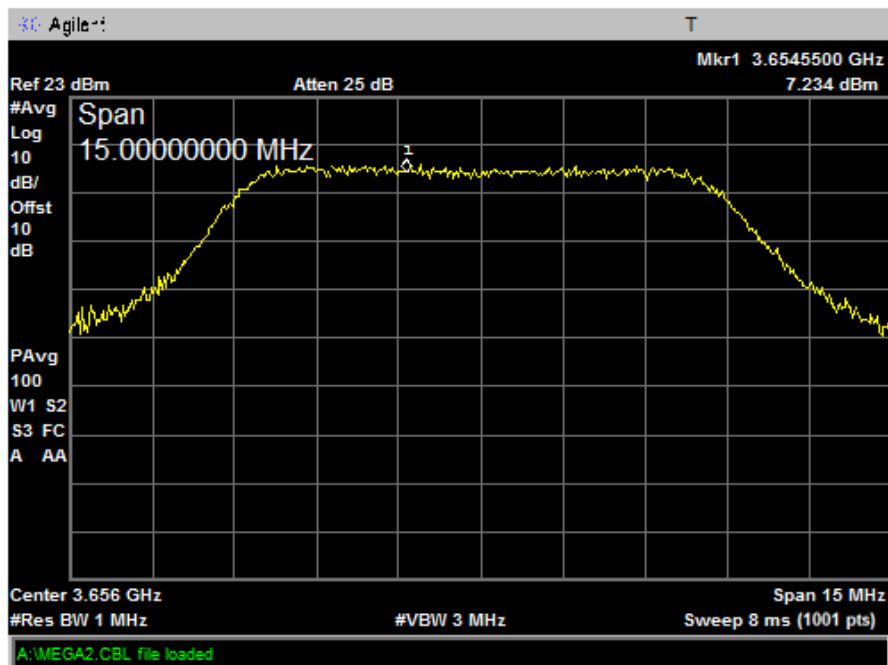


Plot 32. Power Spectral Density - Low - 3655.9MHz - BW10MHz - Chain1 - 2dBi Antenna

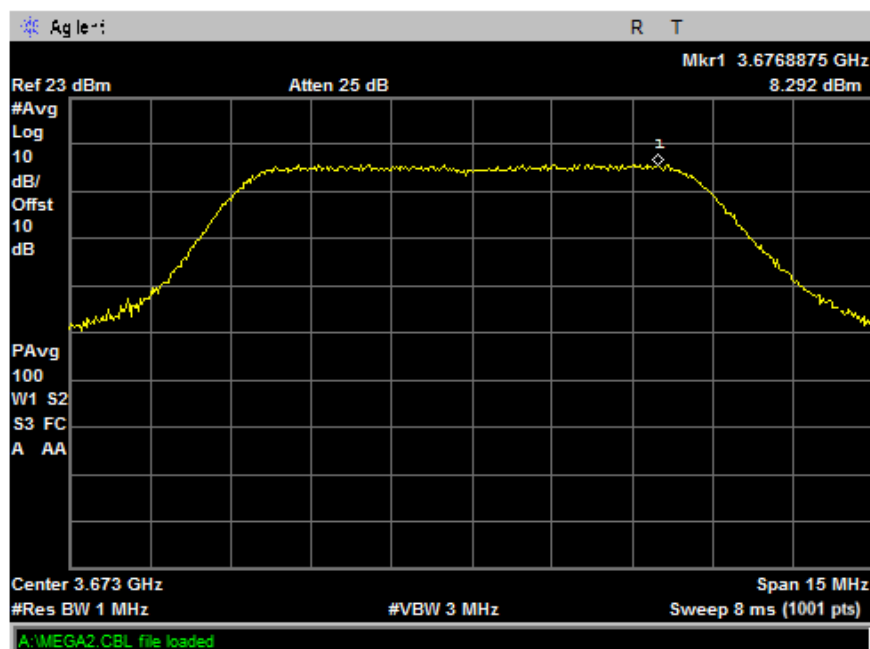


Plot 33. Power Spectral Density - Mid - 3673.4MHz - BW10MHz - Chain0 - 2dBi Antenna

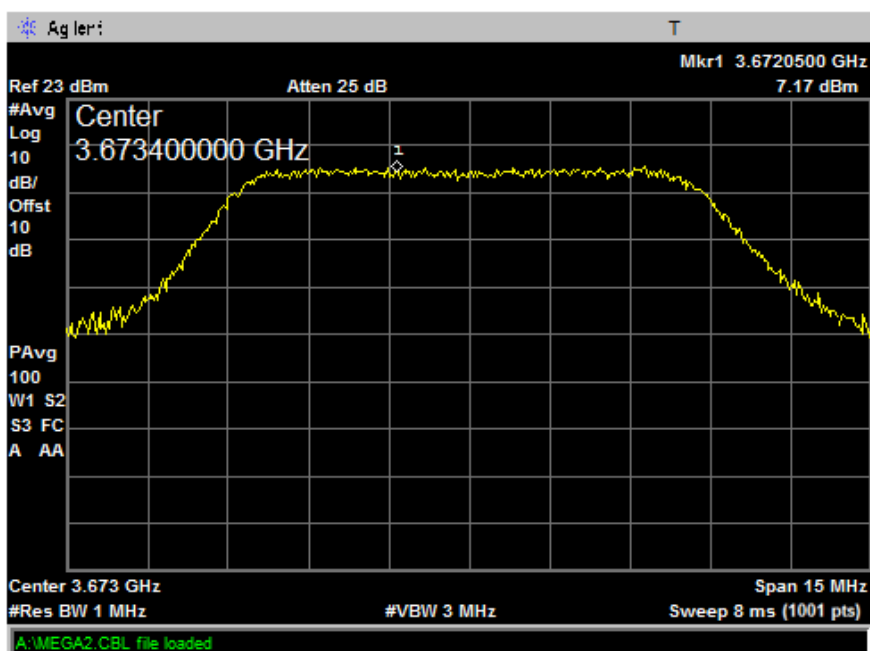

Plot 34. Power Spectral Density - Mid - 3673.4MHz - BW10MHz - Chain1 - 2dBi Antenna

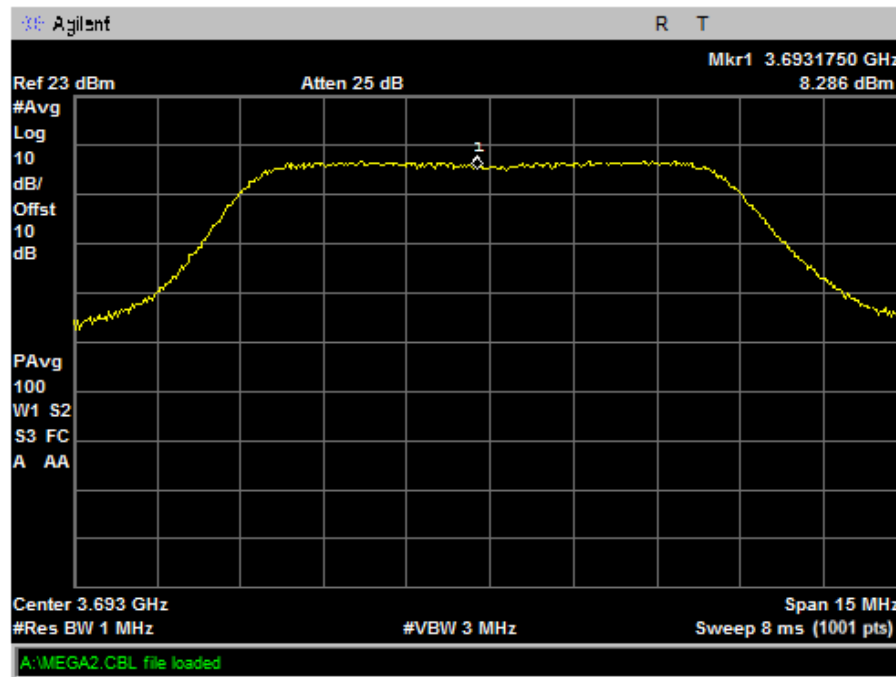


Plot 35. Power Spectral Density - High - 3693.4MHz - BW10MHz - Chain0 - 2dBi Antenna

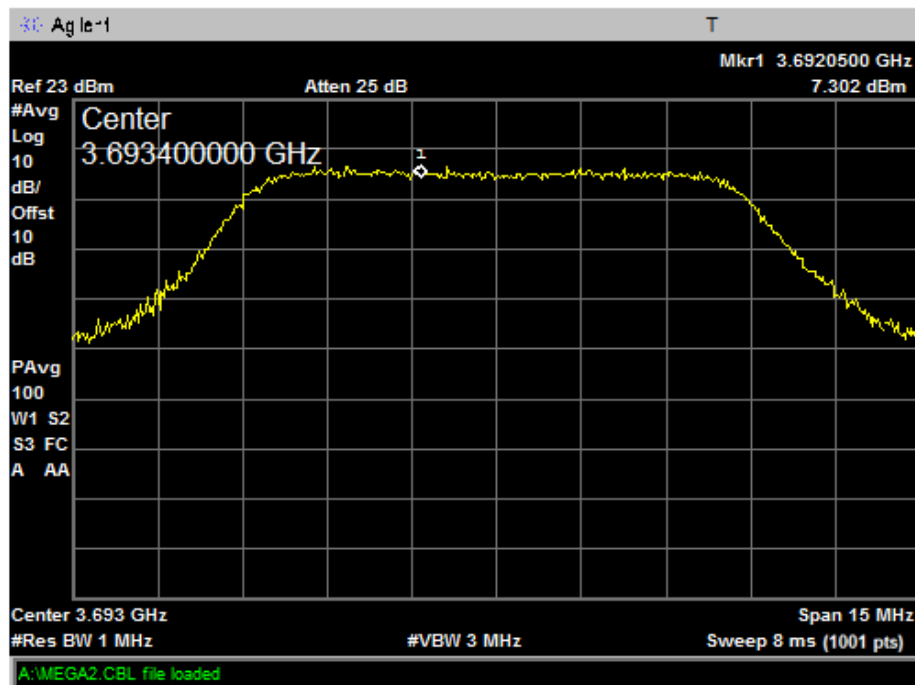


Plot 36. Power Spectral Density - High - 3693.4MHz - BW10MHz - Chain1 - 2dBi Antenna


**Power Spectral Density (4dBi Antenna) (20MHz)**

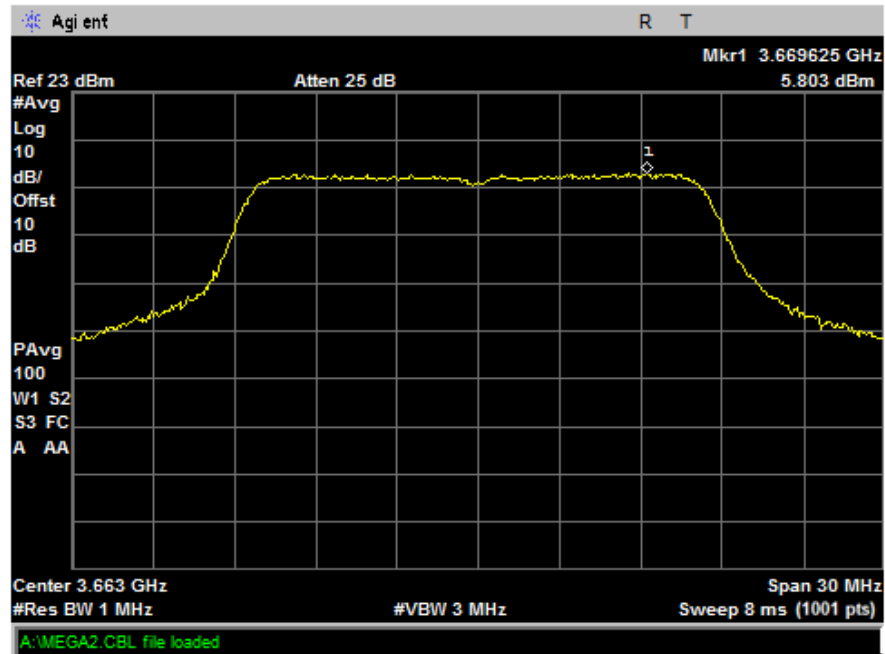


**Plot 37. Power Spectral Density - Low - 3663.4MHz - BW20MHz - Chain0 - 4dBi Antenna**

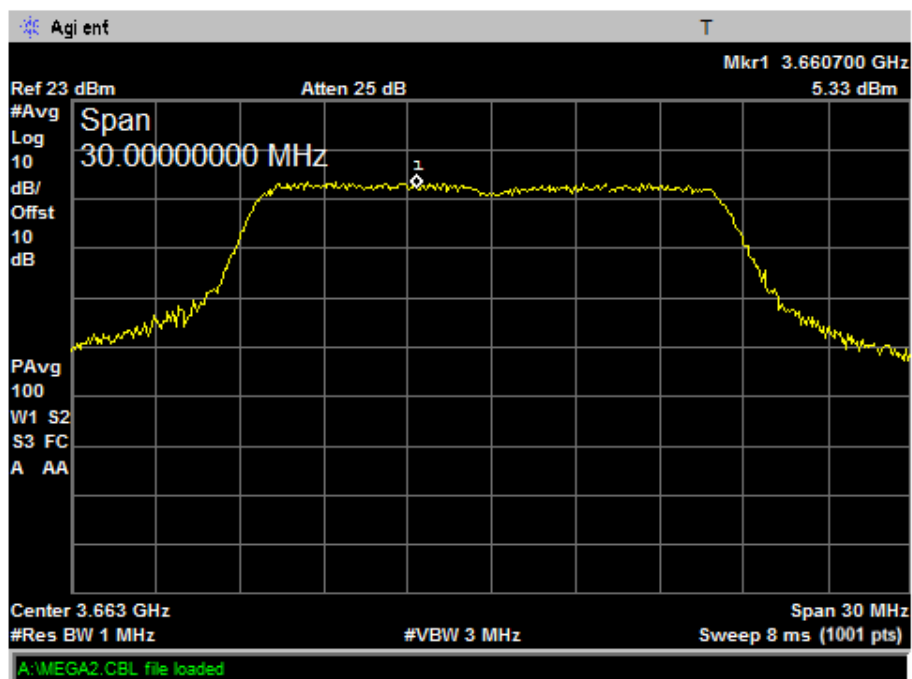


**Plot 38. Power Spectral Density - Low - 3663.4MHz - BW20MHz - Chain1 - 4dBi Antenna**

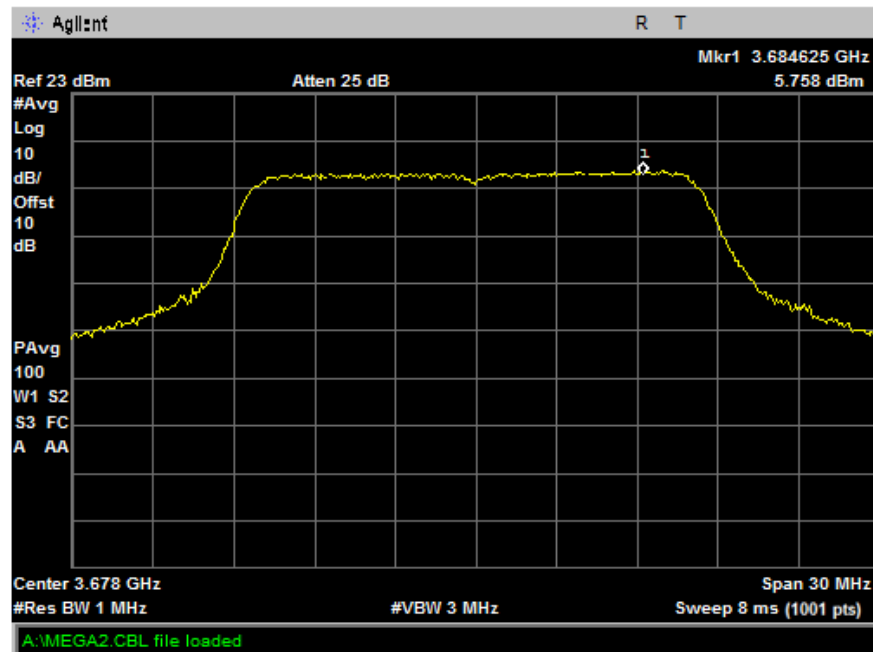


Plot 39. Power Spectral Density - Mid - 3678.4MHz - BW20MHz - Chain0 - 4dBi Antenna

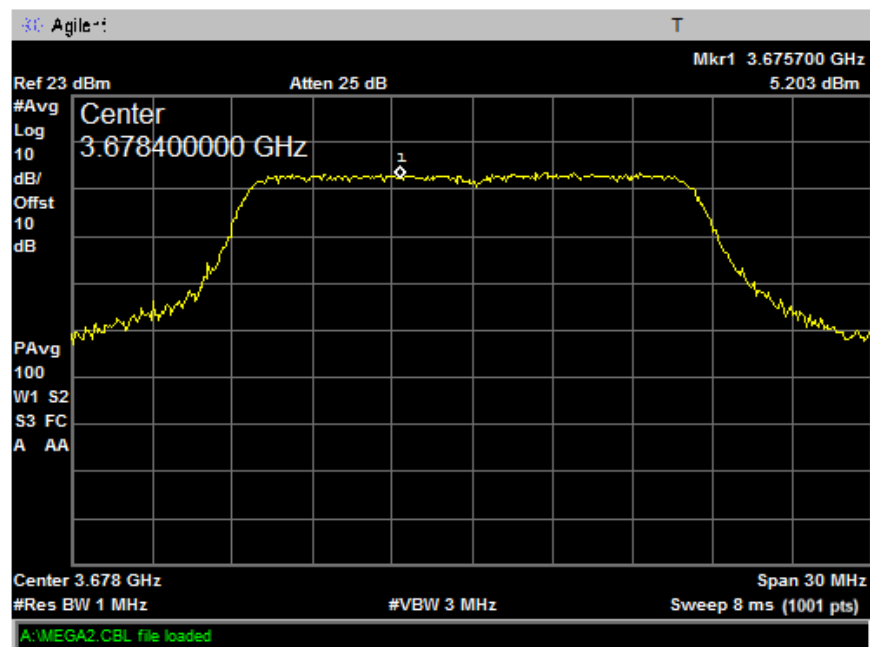

Plot 40. Power Spectral Density - Mid - 3678.4MHz - BW20MHz - Chain1 - 4dBi Antenna

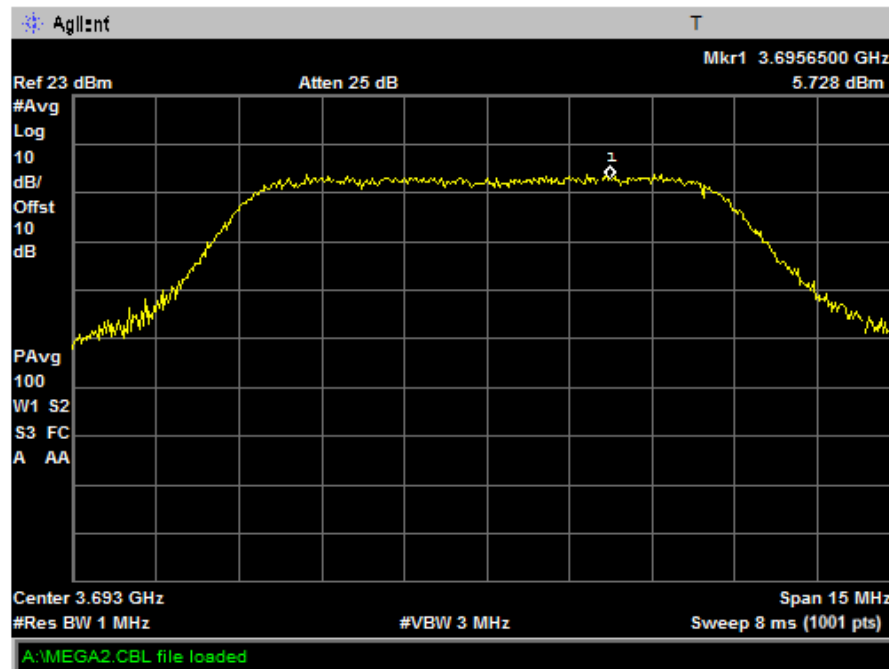


Plot 41. Power Spectral Density – High – 3688.4 MHz – BW20MHz – Chain0 – 4dBi Antenna

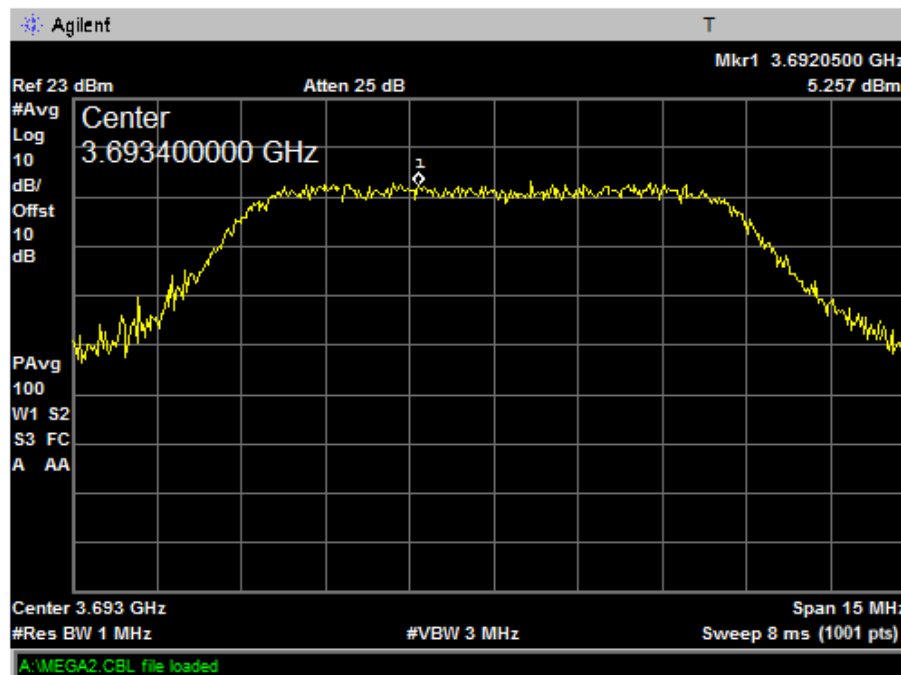


Plot 42. Power Spectral Density – High – 3688.4MHz – BW20MHz – Chain1 – 4dBi Antenna


### Power Spectral Density (4dBi Antenna) (10MHz)

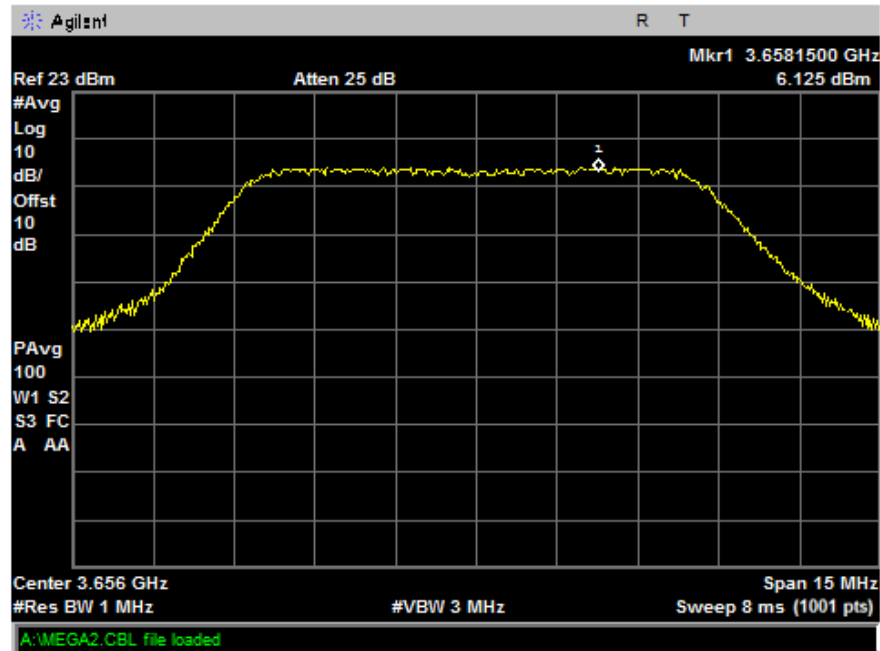


Plot 43. Power Spectral Density - Low - 3655.9MHz - BW10MHz - Chain0 - 4dBi Antenna

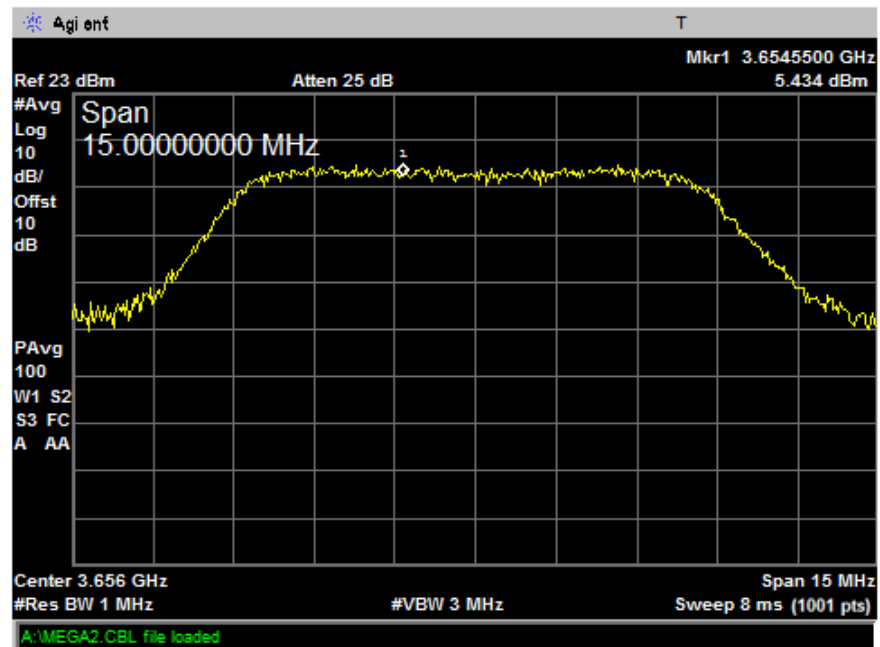


Plot 44. Power Spectral Density - Low - 3655.9MHz - BW10MHz - Chain1 - 4dBi Antenna

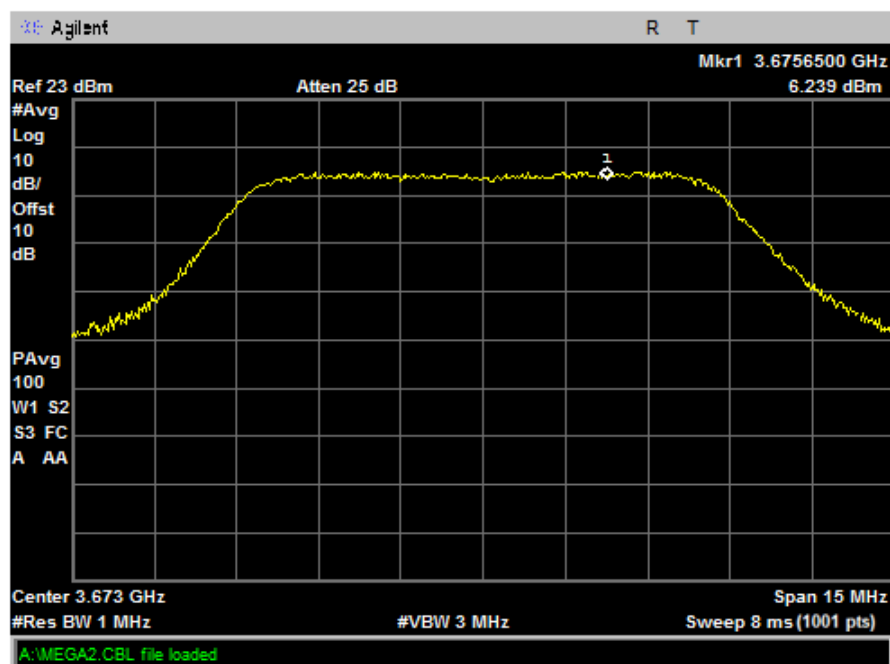


Plot 45. Power Spectral Density - Mid - 3673.4MHz - BW10MHz - Chain0 - 4dBi Antenna

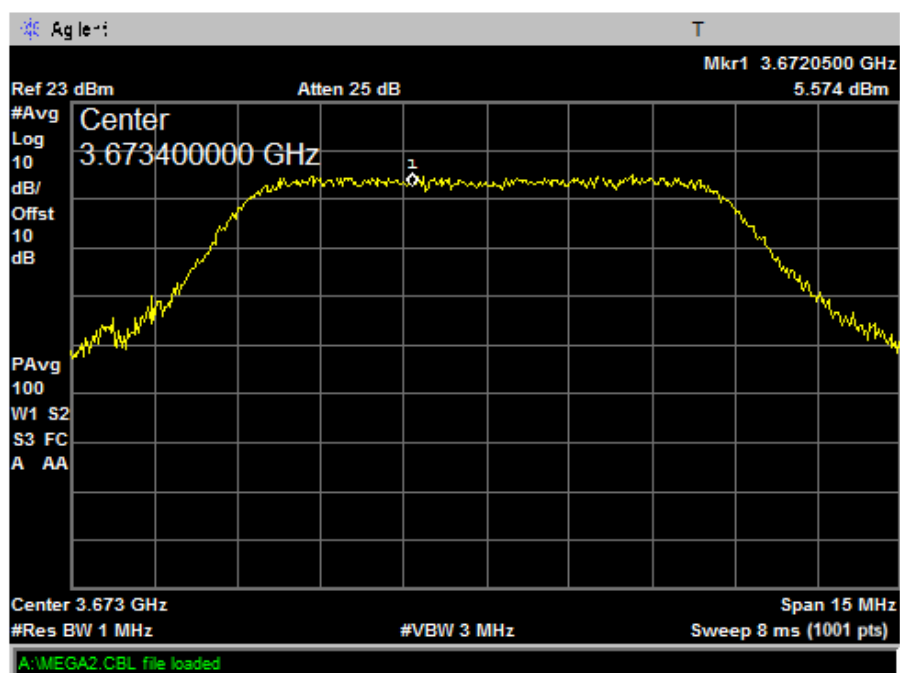

Plot 46. Power Spectral Density - Mid - 3673.4MHz - BW10MHz - Chain1 - 4dBi Antenna

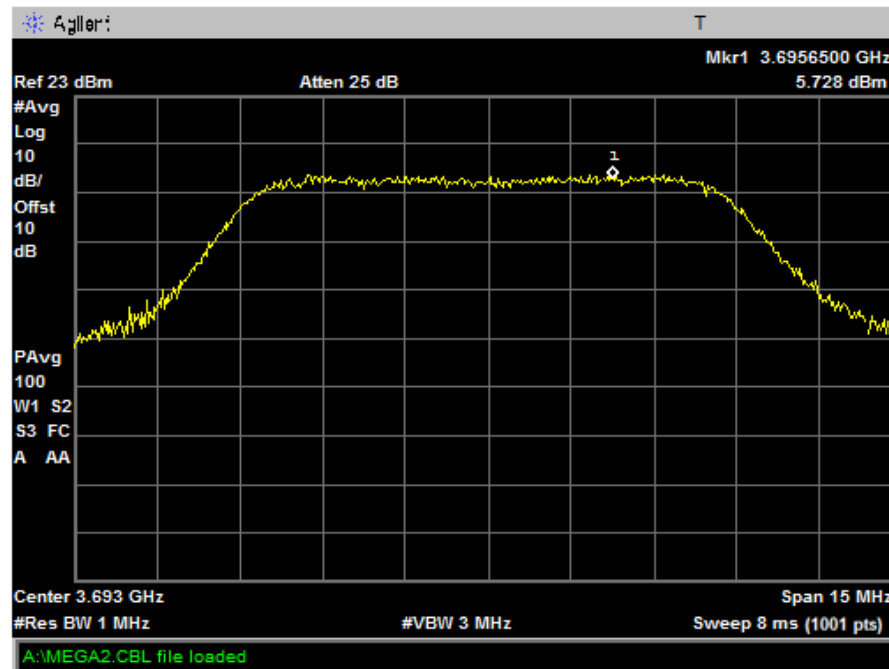

Plot 47. Power Spectral Density - High - 3693.4MHz - BW10MHz - Chain0 - 4dBi Antenna

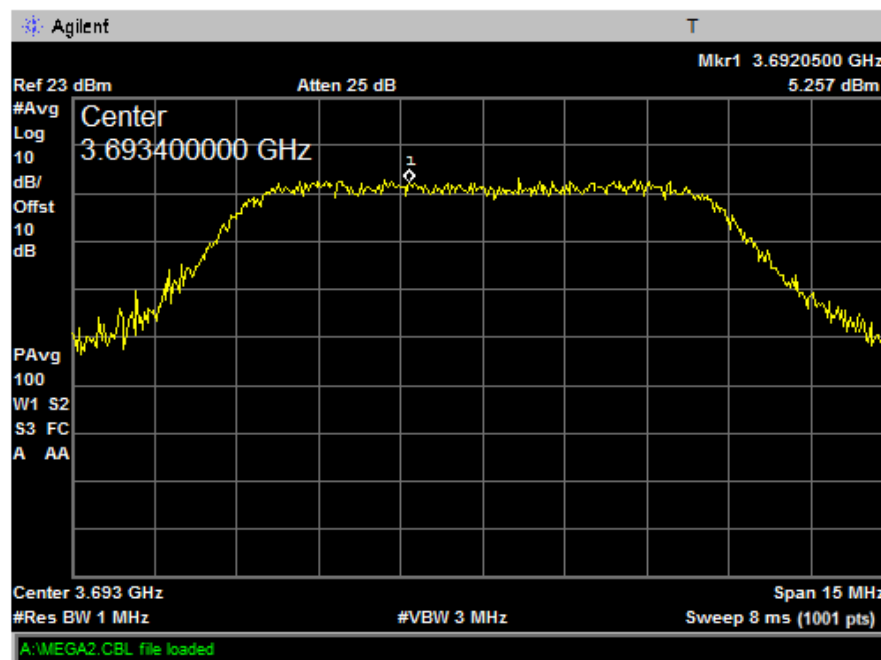

Plot 48. Power Spectral Density - High - 3693.4MHz - BW10MHz - Chain1 - 4dBi Antenna

## 4. Electromagnetic Compatibility Occupied Bandwidth Requirements

### 4.1. Occupied Bandwidth


**Test Requirement(s):** §2.1049

**Test Procedures:** A laptop was connected to EUT to control the RF power output and frequency. The EUT was directly connected to a Spectrum Analyzer with an attenuator inserted in-between. The Spectrum Analyzer's channel bandwidth measurement option was used to measure the EUT's occupied bandwidth. Measurements were performed at the low, mid and high channels for each of the EUT's bandwidths.

**Test Results:** Equipment complies with Section 2.1049.


**Test Engineer(s):** Arsalan Hasan

**Test Date(s):** 06/30/2016




**Figure 2. Occupied Bandwidth Test Setup**


## Occupied Bandwidth (20MHz Bandwidth) 2dBi

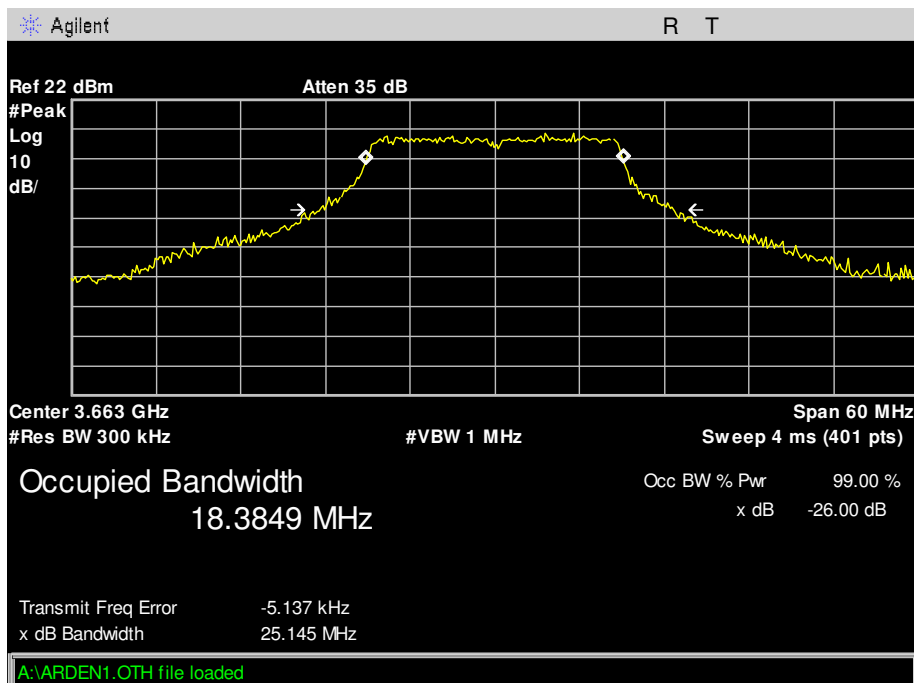


Plot 49. Occupied Bandwidth - Low - 3663.4MHz - BW20MHz - Chain0

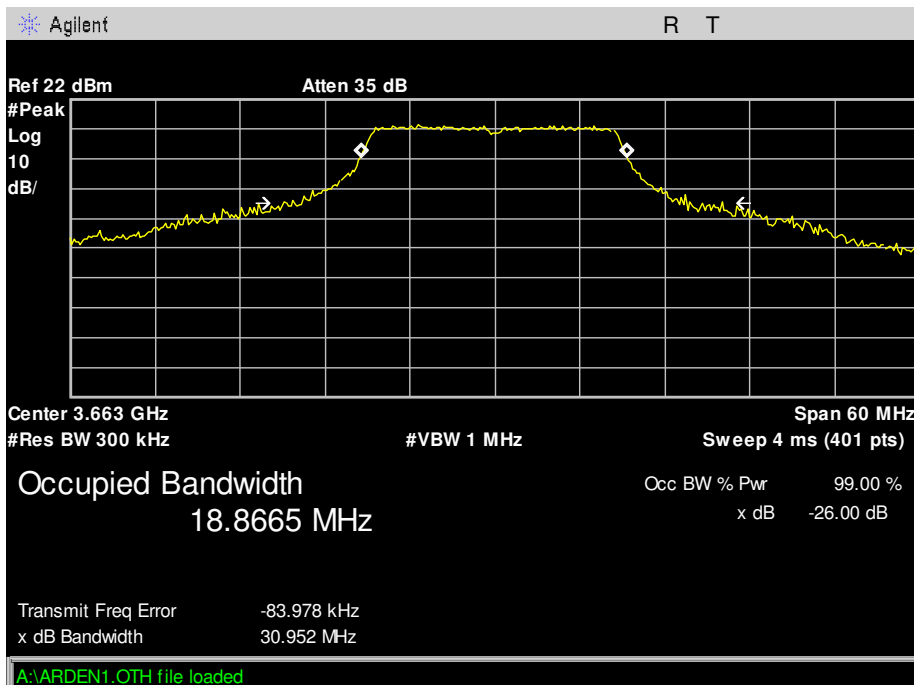


Plot 50. Occupied Bandwidth - Low - 3663.4MHz - BW20MHz - Chain1

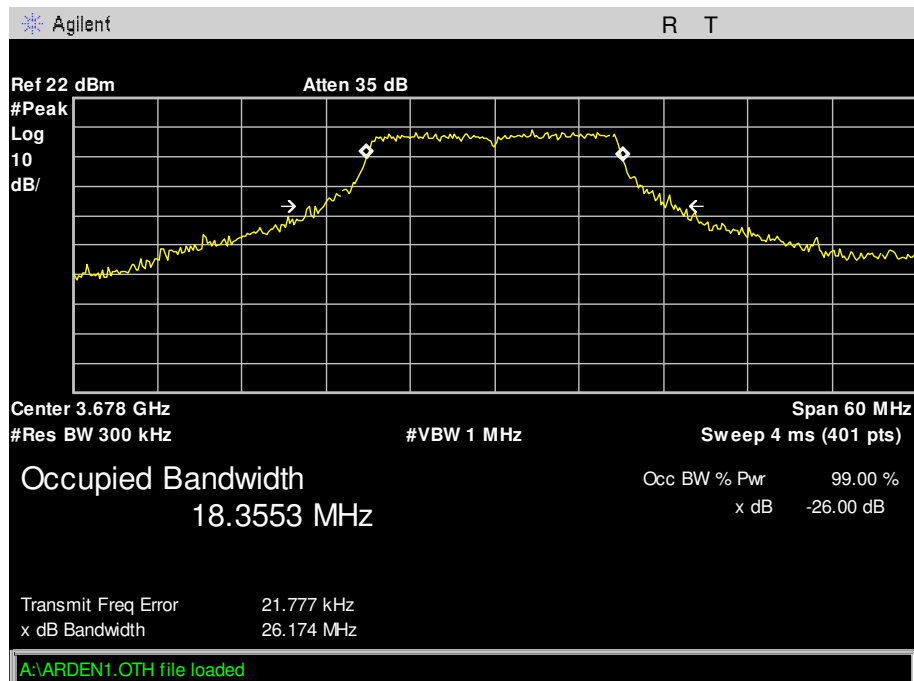


Plot 51. Occupied Bandwidth - Mid - 3678.4MHz - BW20MHz - Chain0

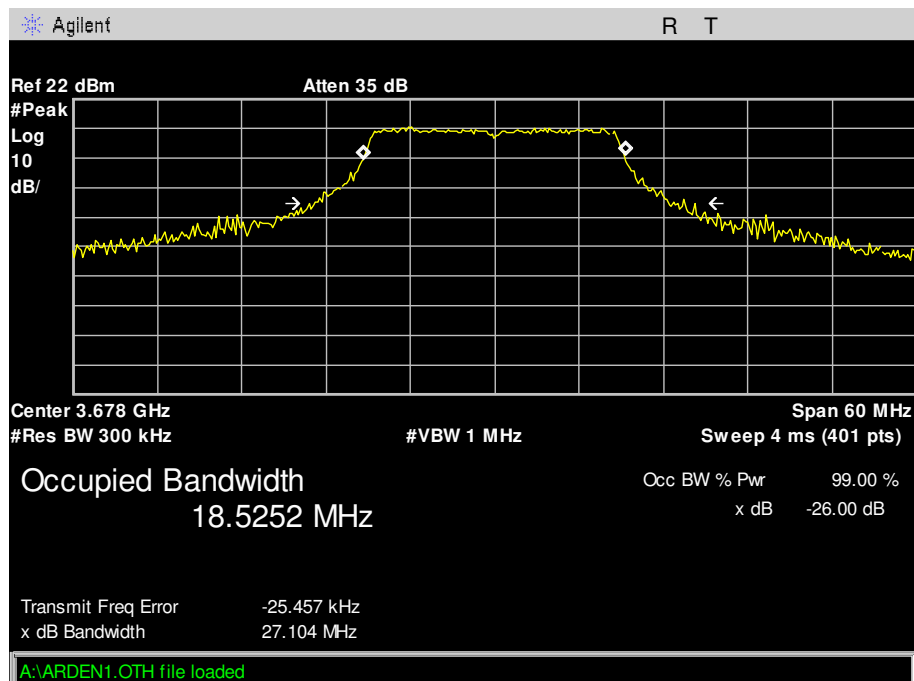

Plot 52. Occupied Bandwidth - Mid - 3678.4MHz - BW20MHz - Chain1

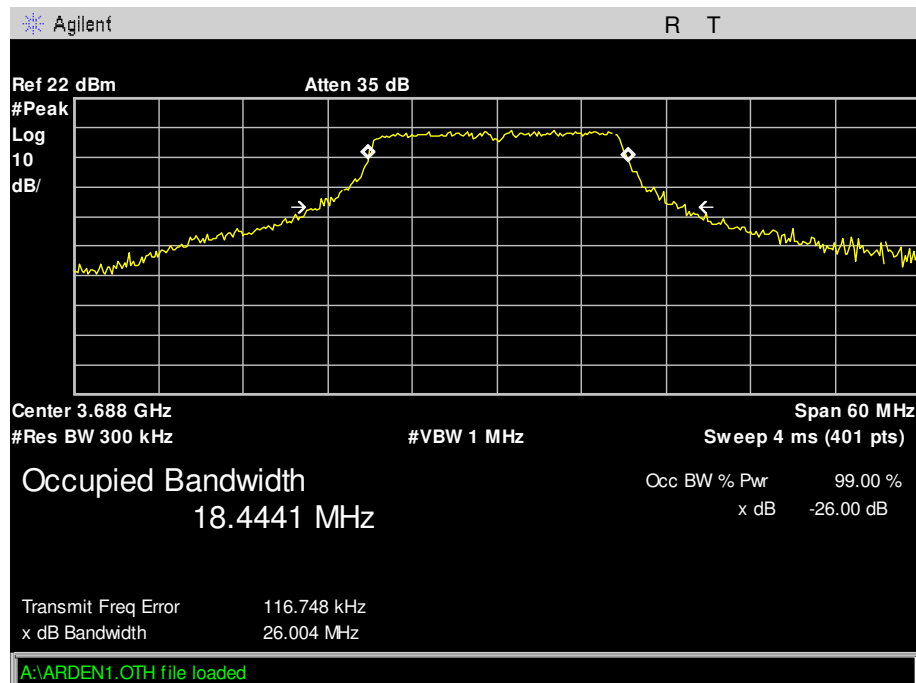


Plot 53. Occupied Bandwidth - High - 3688.4MHz - BW20MHz - Chain0

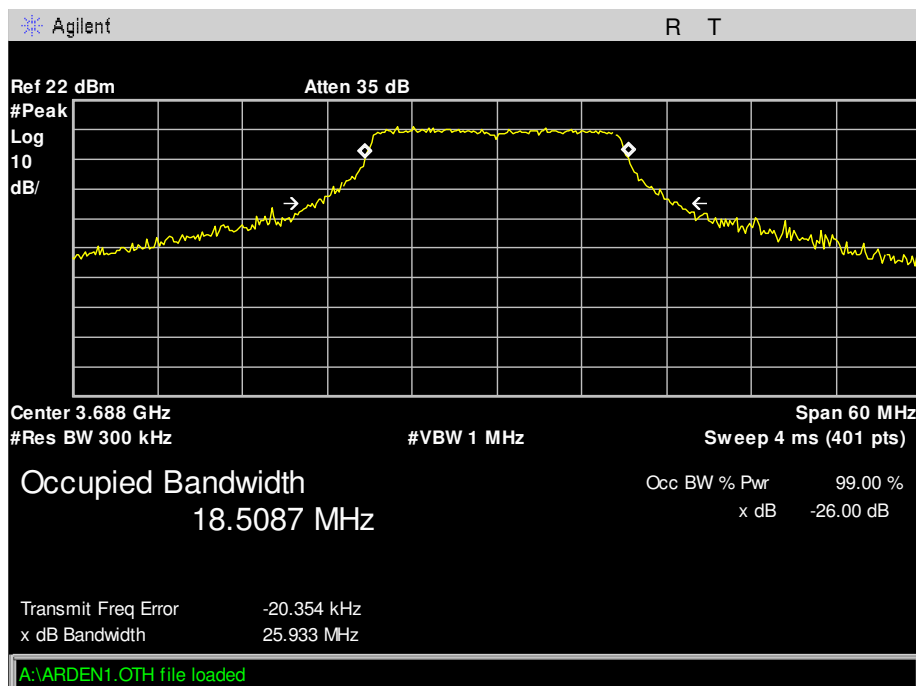


Plot 54. Occupied Bandwidth - High - 3688.4MHz - BW20MHz - Chain1


## Occupied Bandwidth (10MHz Bandwidth) 2dBi

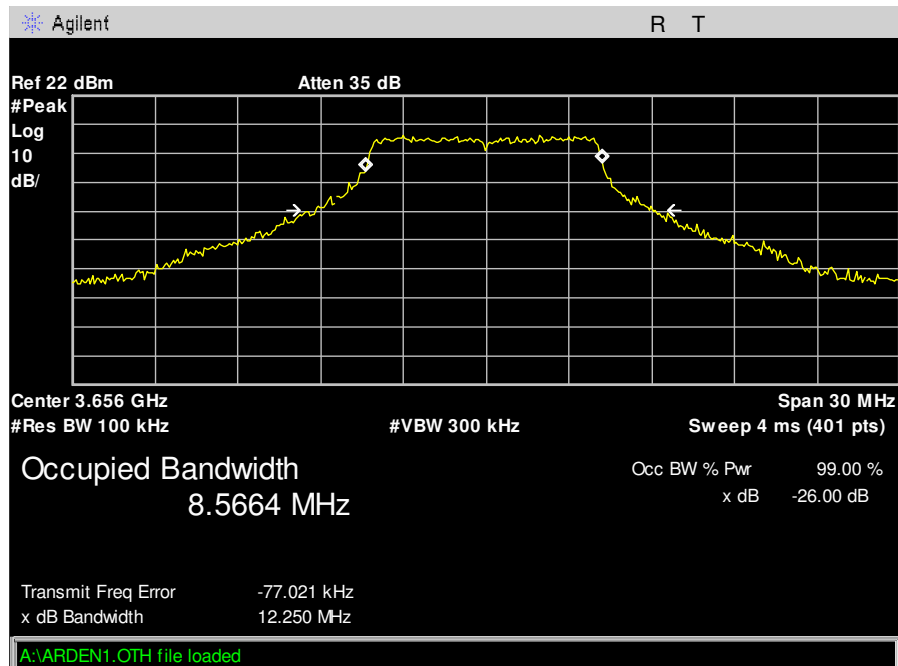


Plot 55. Occupied Bandwidth - Low - 3655.9MHz - BW10MHz - Chain0

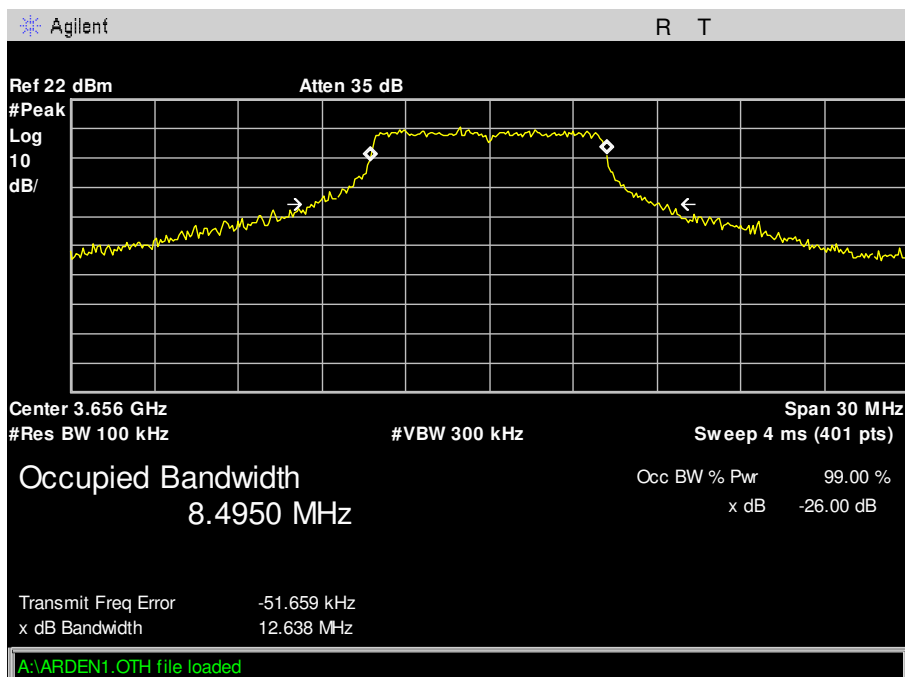


Plot 56. Occupied Bandwidth - Low - 3655.9MHz - BW10MHz - Chain1

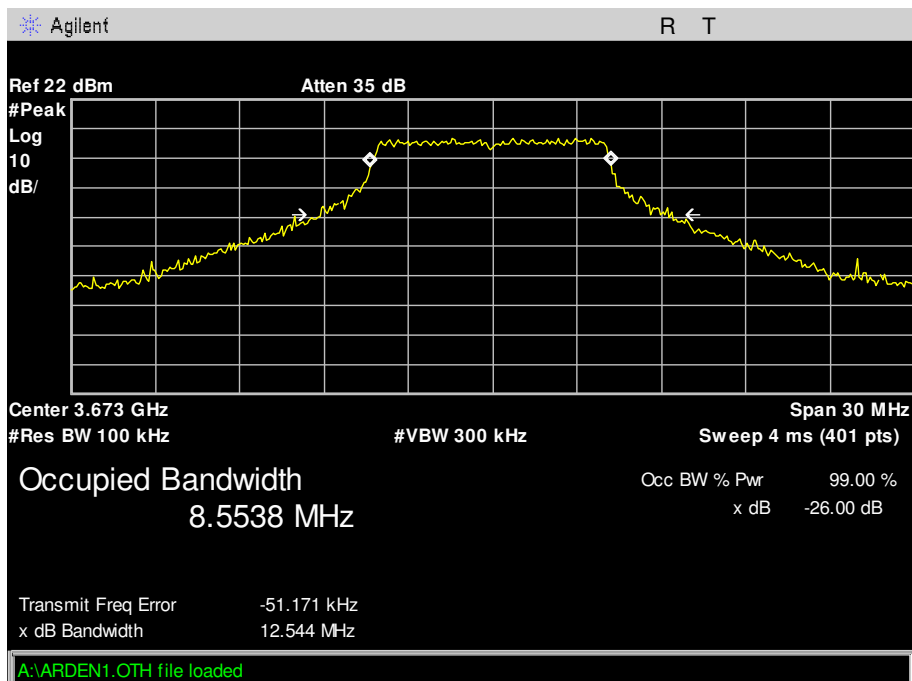


Plot 57. Occupied Bandwidth - Mid - 3673.4MHz - BW10MHz - Chain0

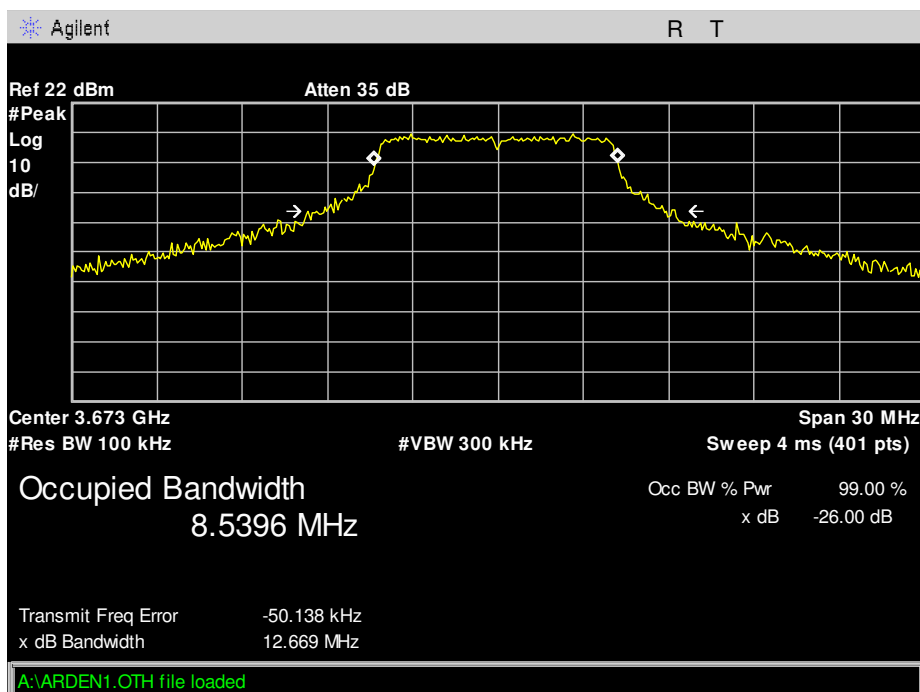

Plot 58. Occupied Bandwidth - Mid - 3673.4MHz - BW10MHz - Chain1

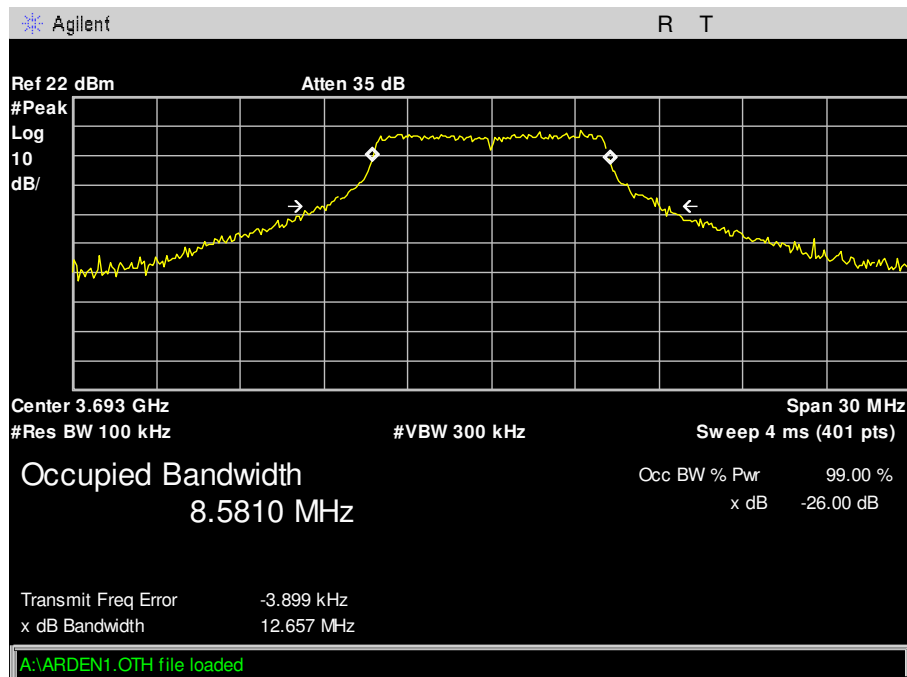


Plot 59. Occupied Bandwidth - High - 3693.4MHz - BW10MHz - Chain0

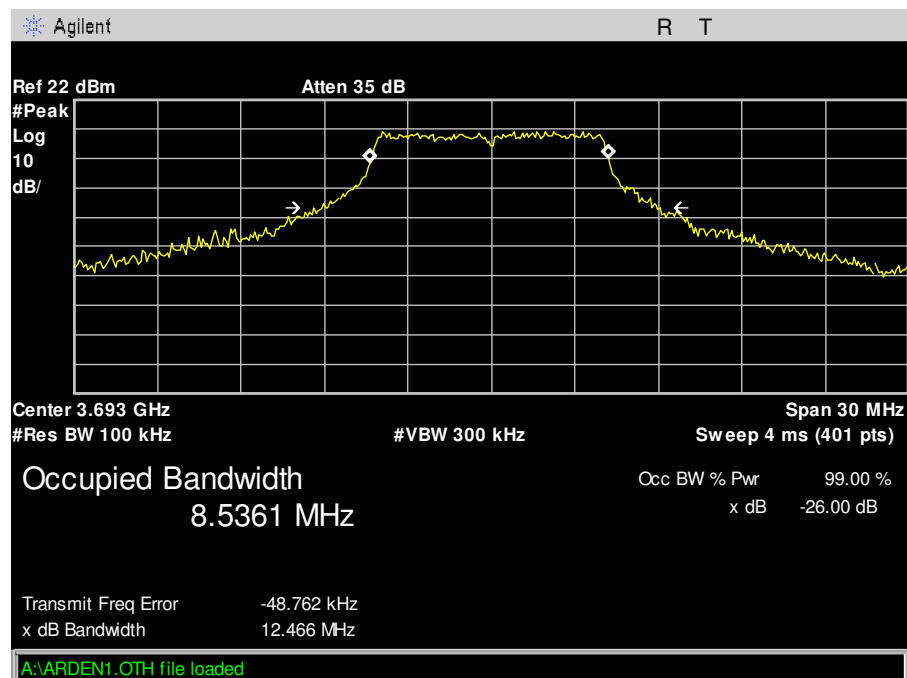


Plot 60. Occupied Bandwidth - High - 3693.4MHz - BW10MHz - Chain1


## Occupied Bandwidth (20MHz Bandwidth) 4dBi

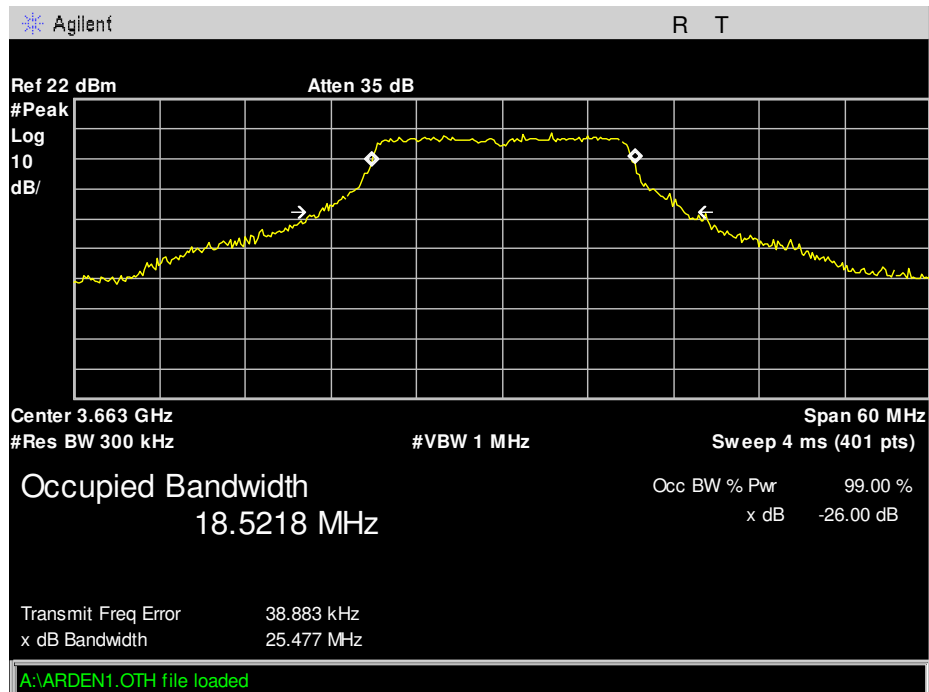


Plot 61. Occupied Bandwidth - Low - 3663.4MHz - BW20MHz - Chain0

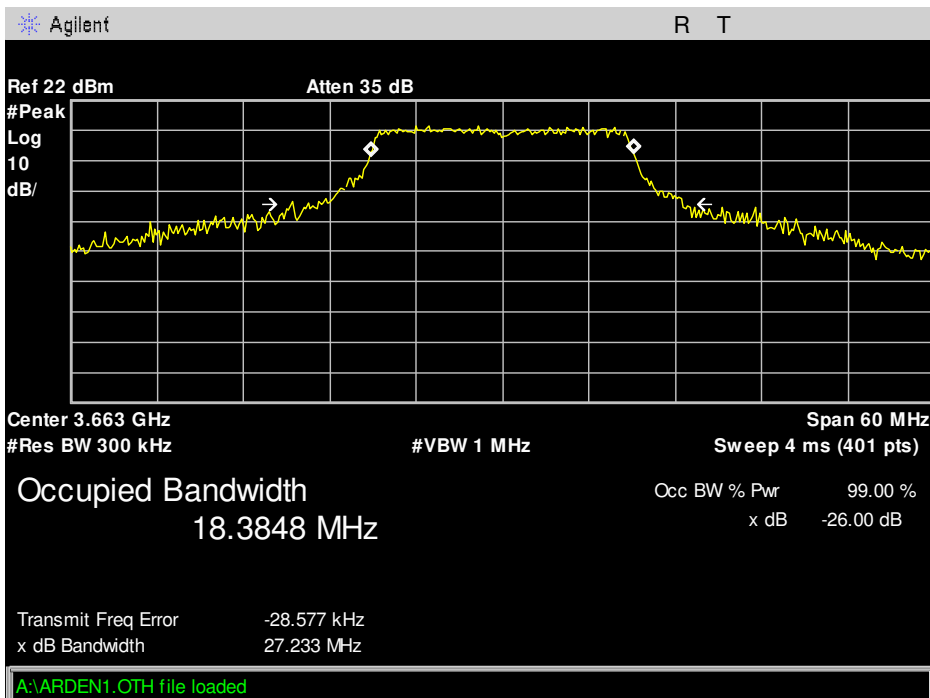


Plot 62. Occupied Bandwidth - Low - 3663.4MHz - BW20MHz - Chain1

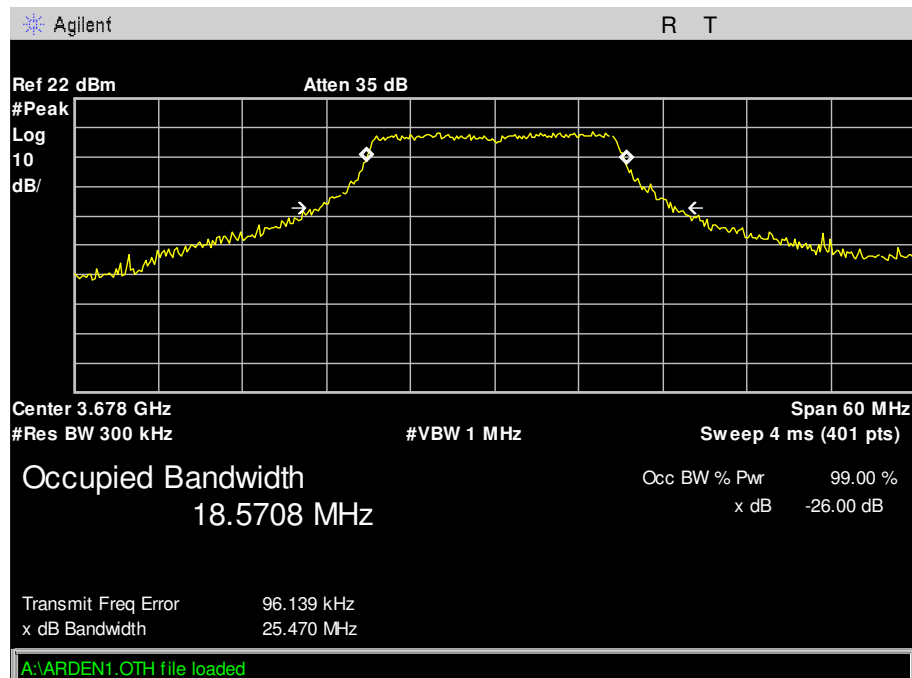


Plot 63. Occupied Bandwidth - Mid - 3678.4MHz - BW20MHz - Chain0

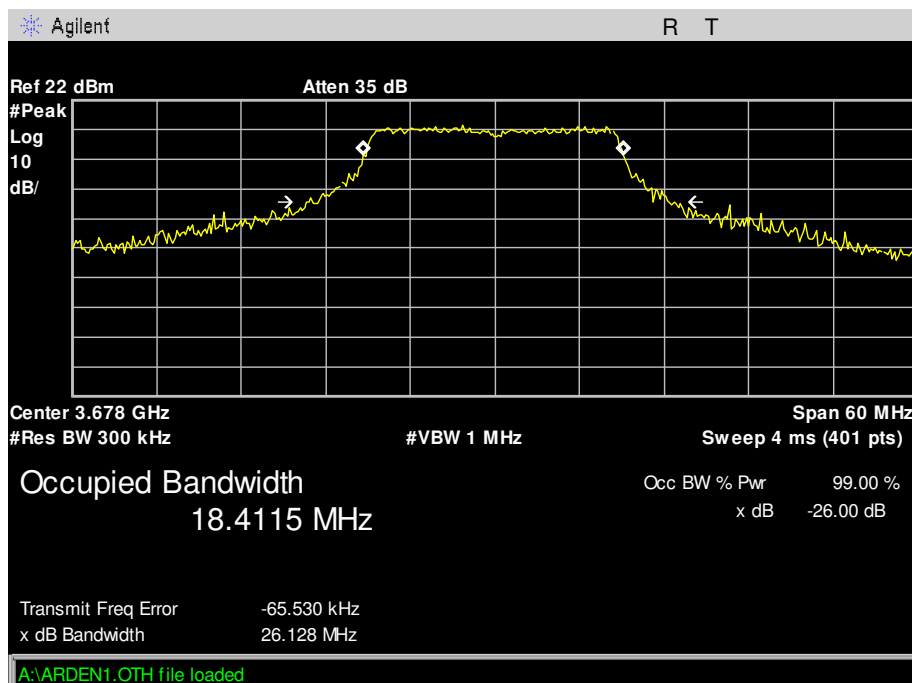

Plot 64. Occupied Bandwidth - Mid - 3678.4MHz - BW20MHz - Chain1

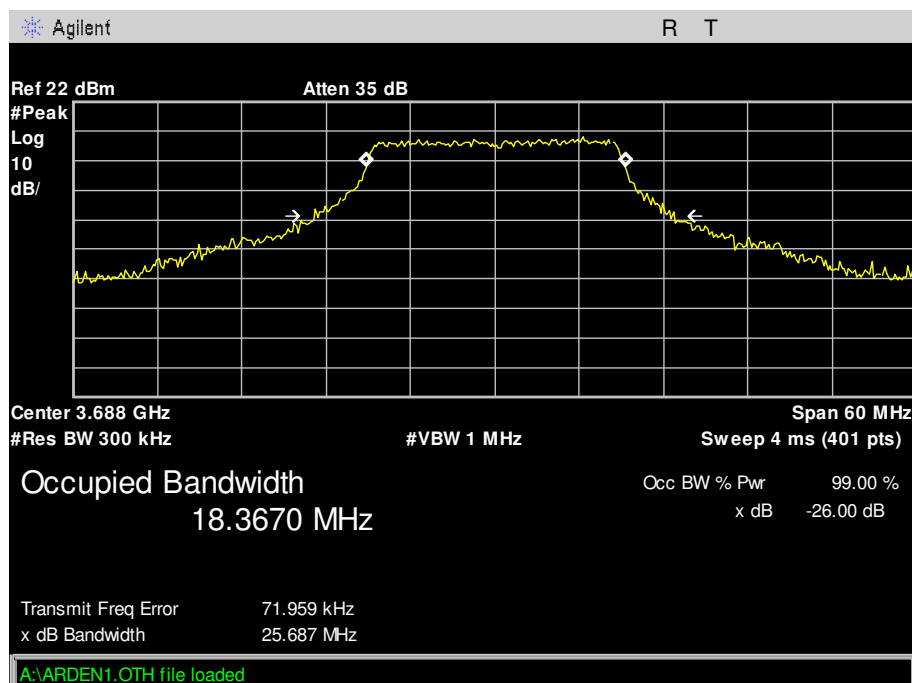


Plot 65. Occupied Bandwidth - High - 3688.4MHz - BW20MHz - Chain0

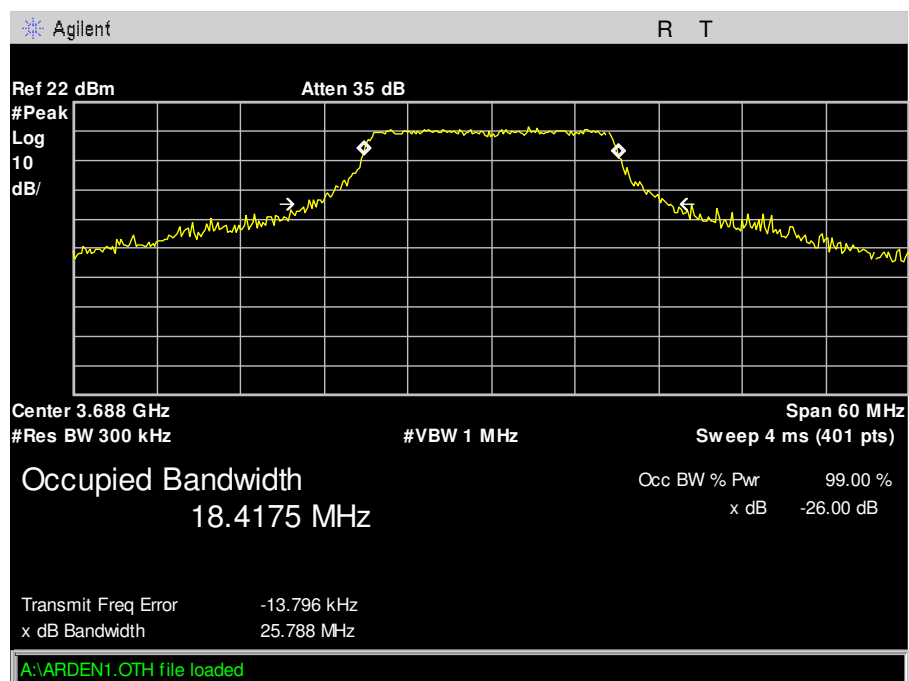


Plot 66. Occupied Bandwidth - High - 3688.4MHz - BW20MHz - Chain1


## Occupied Bandwidth (10MHz Bandwidth) 4dBi

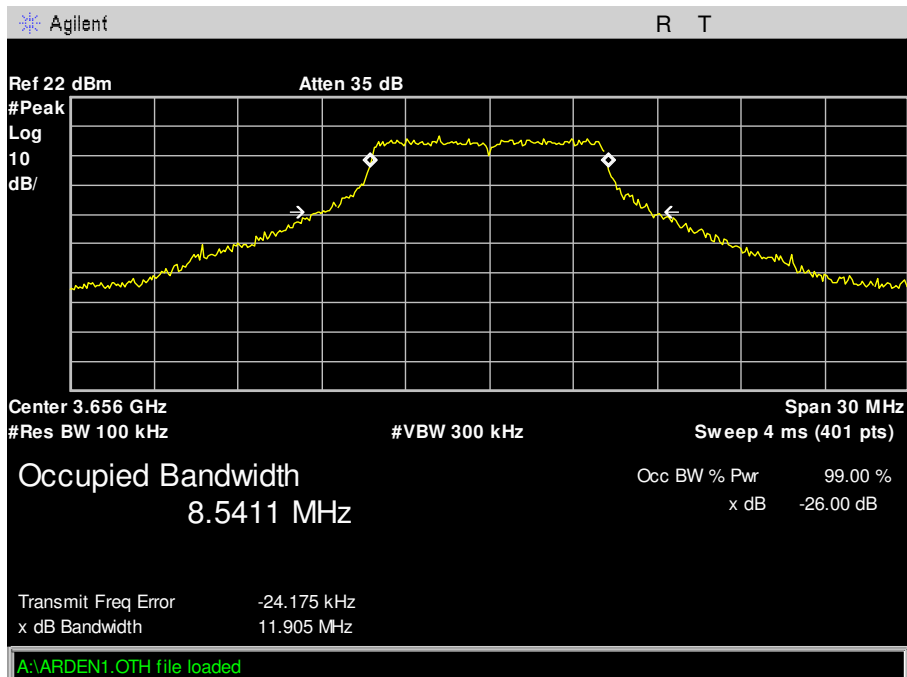


Plot 67. Occupied Bandwidth - Low - 3655.9MHz - BW10MHz - Chain0

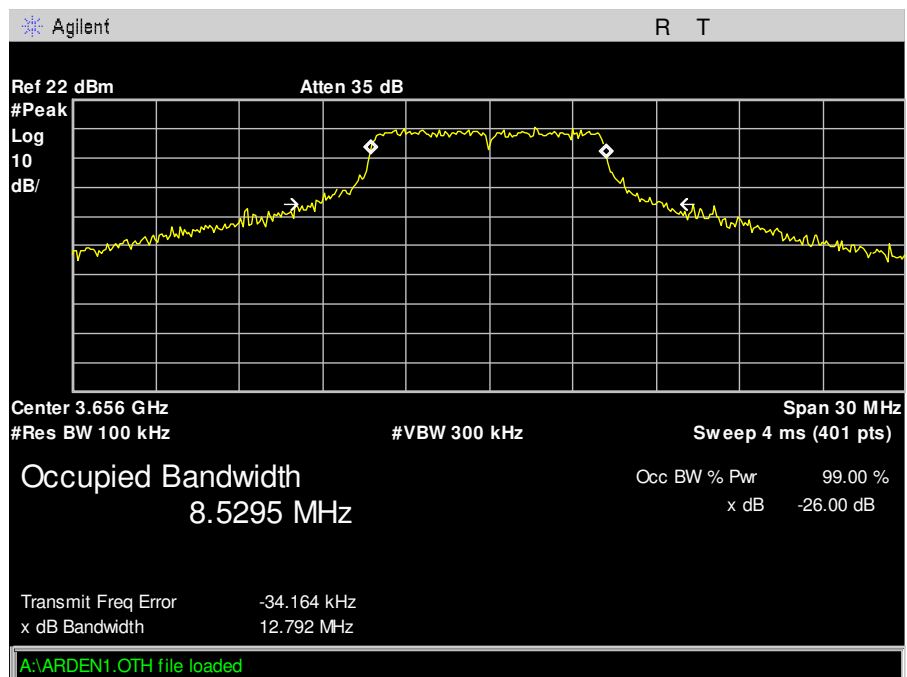


Plot 68. Occupied Bandwidth - Low - 3655.9MHz - BW10MHz - Chain1

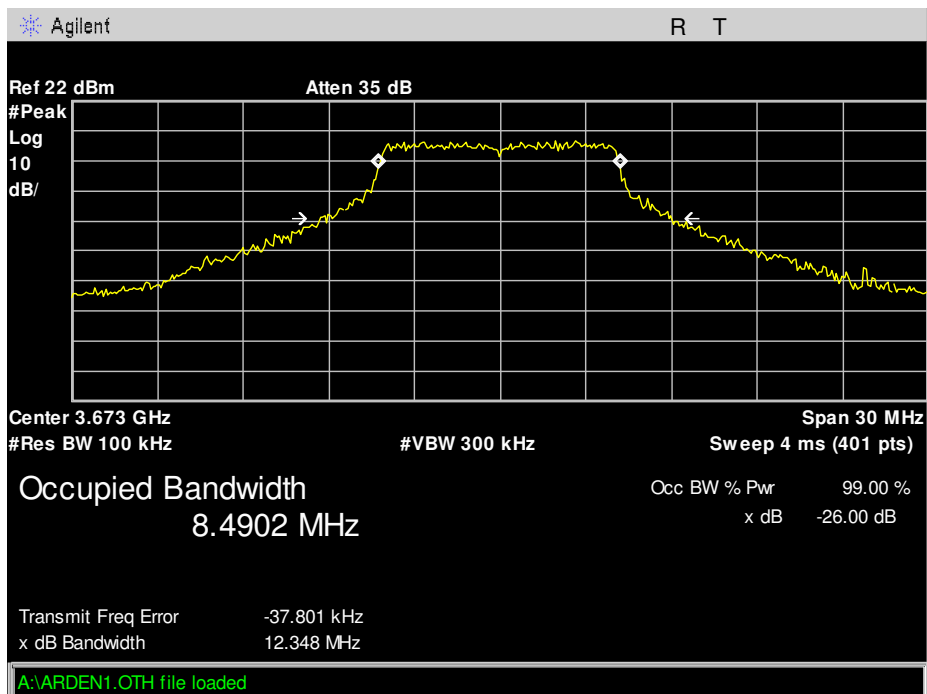


Plot 69. Occupied Bandwidth - Mid - 3673.4MHz - BW10MHz - Chain0

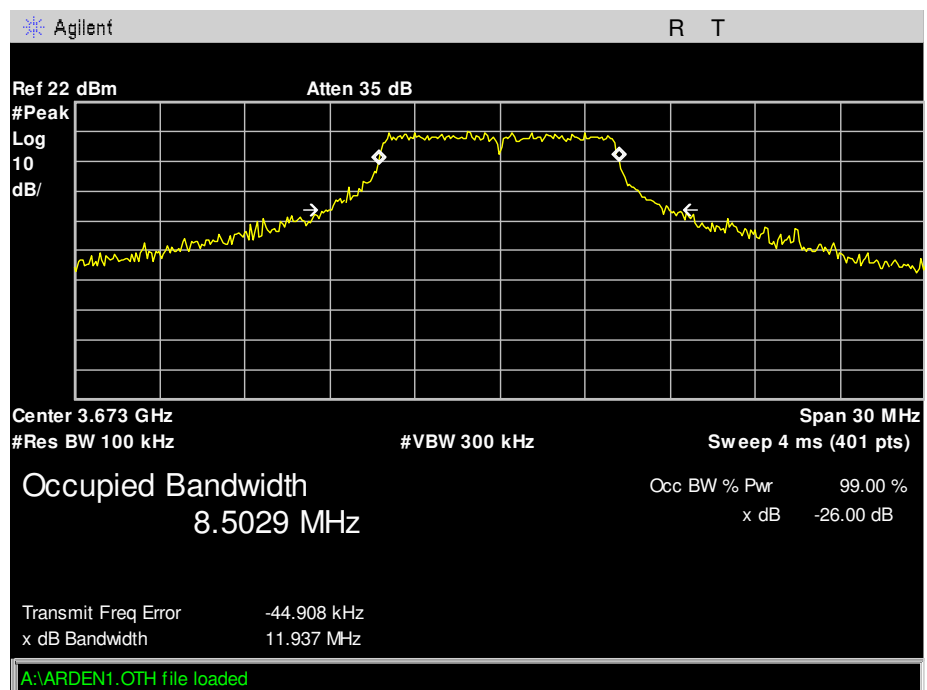

Plot 70. Occupied Bandwidth - Mid - 3673.4MHz - BW10MHz - Chain1

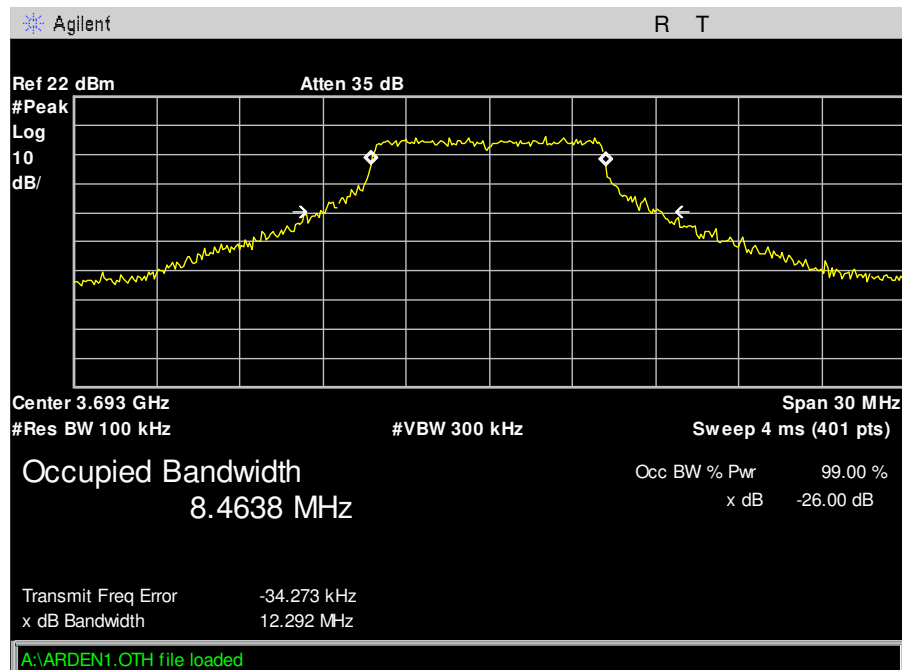

Plot 71. Occupied Bandwidth - High - 3693.4MHz - BW10MHz - Chain0

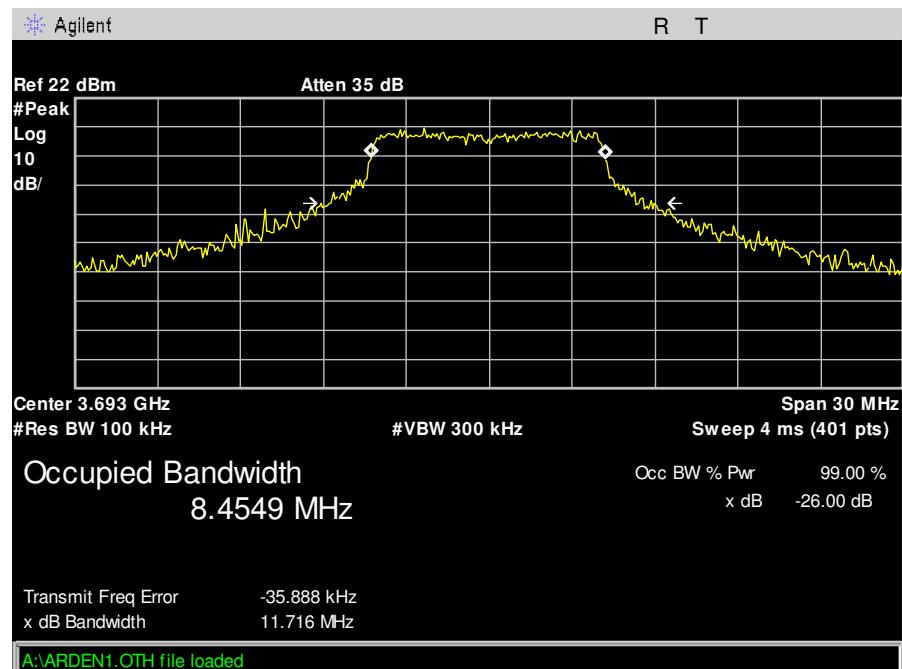

Plot 72. Occupied Bandwidth - High - 3693.4MHz - BW10MHz - Chain1

## 5. Electromagnetic Compatibility Spurious Emissions at Antenna Terminal Requirements

### 5.1. Spurious Emissions at Antenna Terminals

**Test Requirement(s):** §2.1051, §90.1323(a), §90.210

**Test Procedures:** A laptop was connected to EUT to control the RF power output and frequency channel. The EUT was connected to a Spectrum Analyzer through a broad band attenuator. The Spectrum Analyzer was set to a RBW = 1 MHz and a VBW > 1MHz. Measurements were made at the low, mid and high channels.

Emissions mask B was used.

**Limits:** The power of any emission outside the licensee's frequency band of operation shall be attenuated below the transmitters power (P) by at least  $43 + 10\log(P)$  dB.


**Test Results:** Equipment complies with Section 2.1051 and 90.1323(a).

**Test Engineer(s):** Arsalan Hasan


**Test Date(s):** 06/30/2016




Figure 3. Spurious Emissions at Antenna Terminals Test Setup

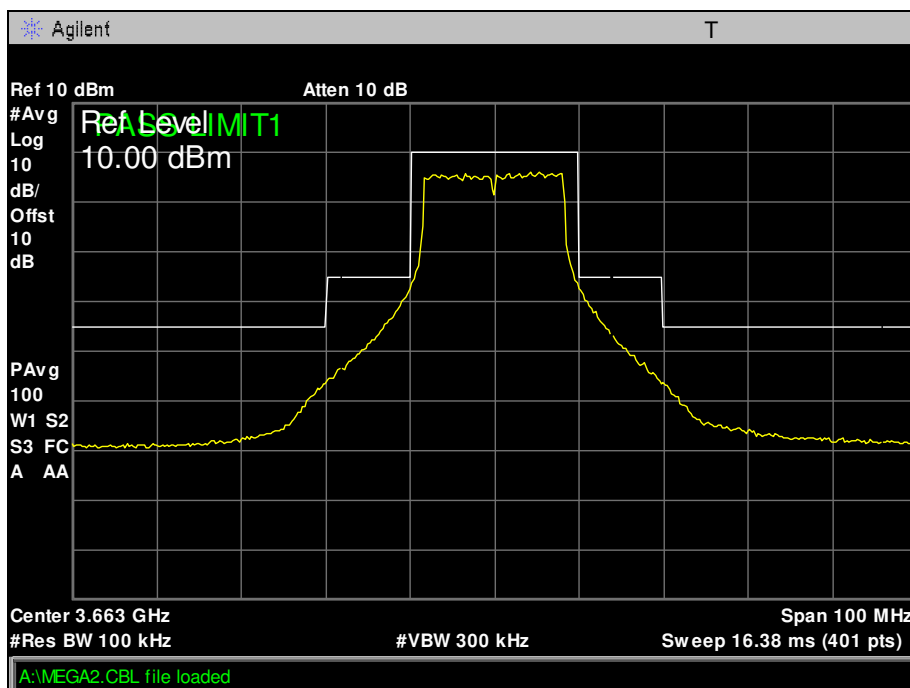


Plot 73. Emission Mask - Low - 3663.4MHz - BW20MHz - Chain0

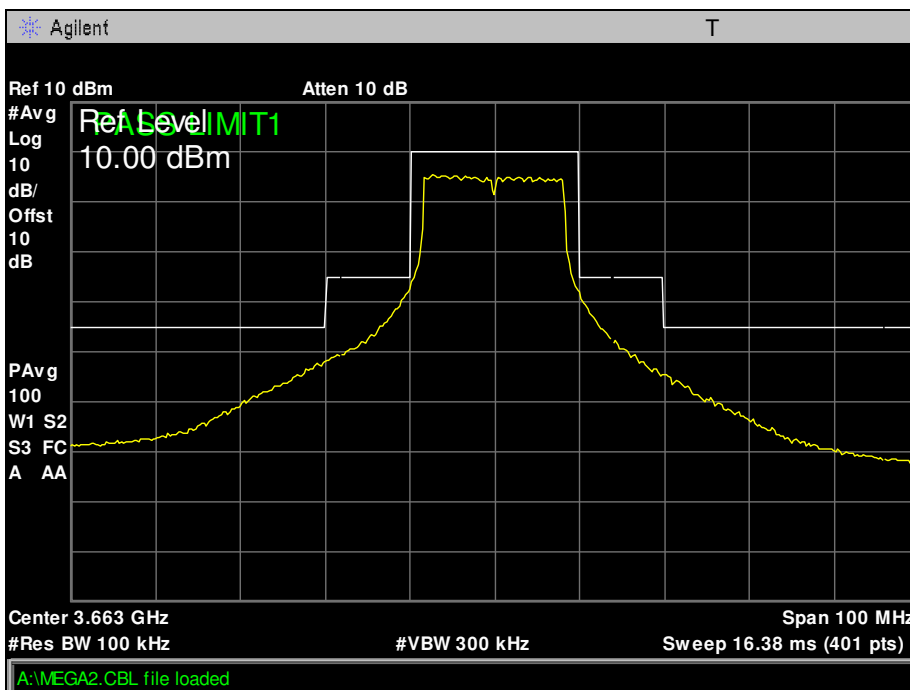


Plot 74. Emission Mask - Low - 3663.4MHz - BW20MHz - Chain1

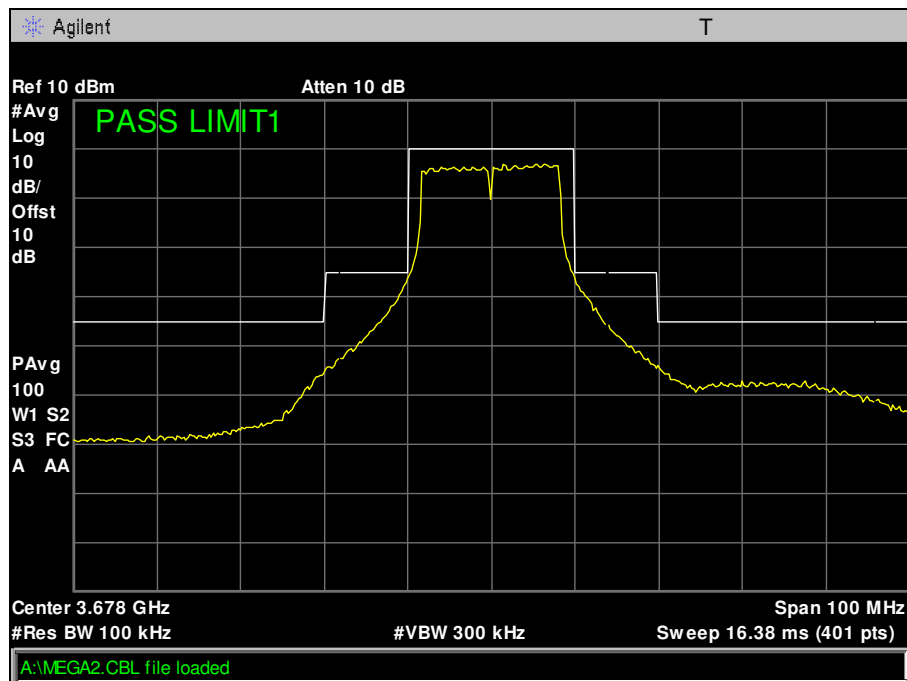


Plot 75. Emission Mask - Mid - 3678.4MHz - BW20MHz - Chain0

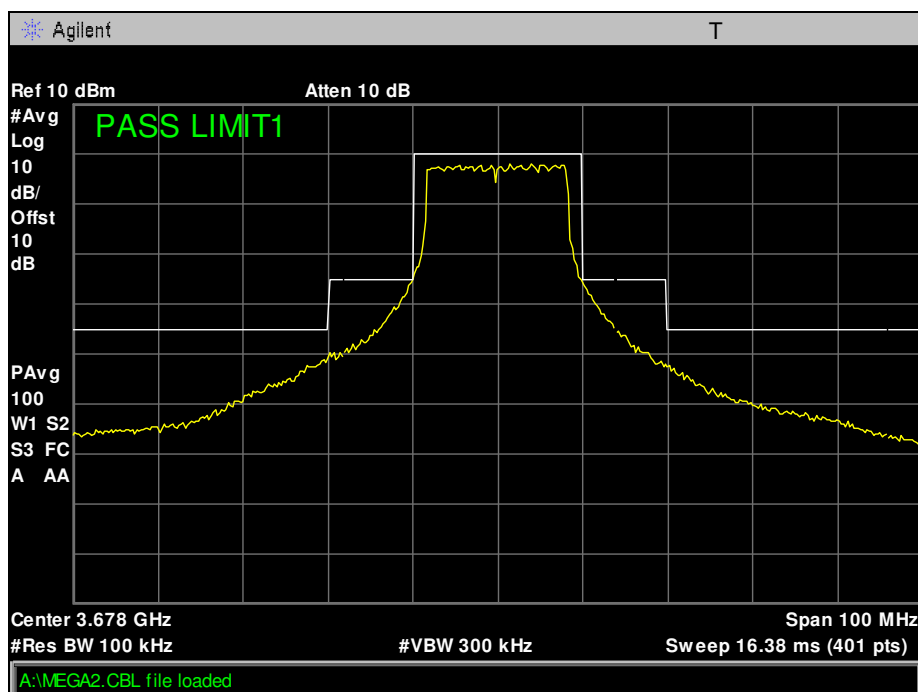

Plot 76. Emission Mask - Mid - 3678.4MHz - BW20MHz - Chain1

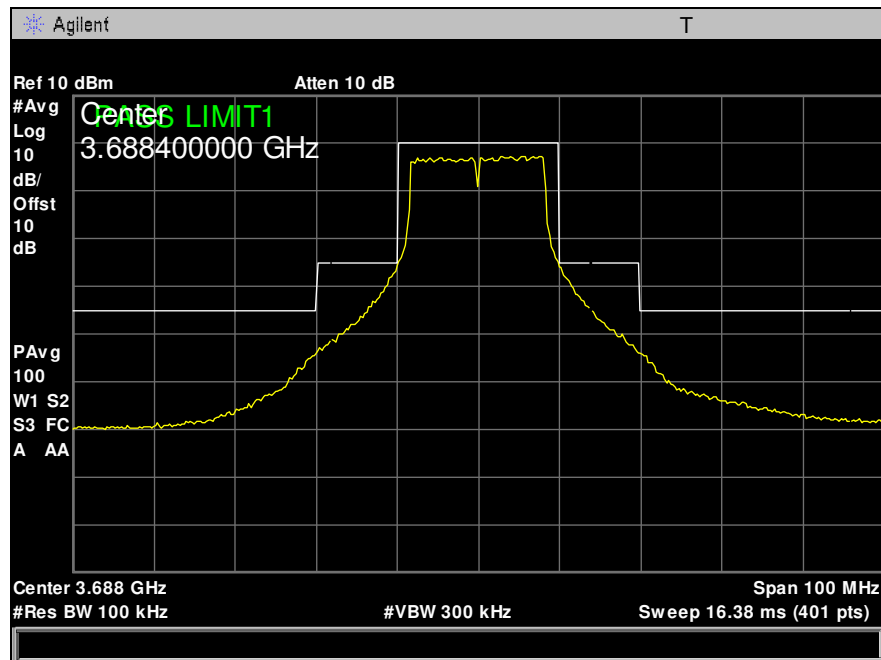


Plot 77. Emission Mask - High - 3688.4MHz - BW20MHz - Chain0

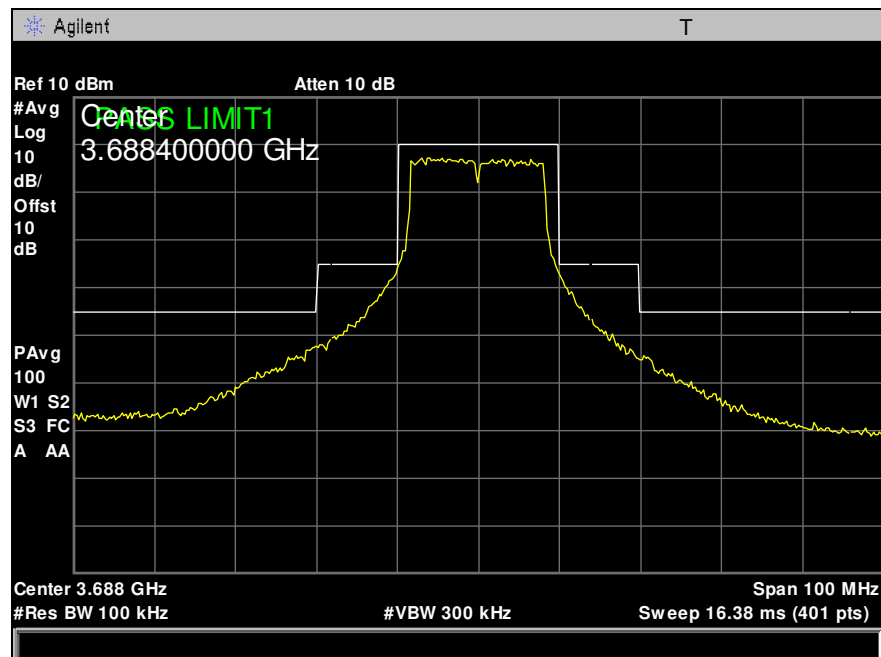


Plot 78. Emission Mask - High - 3688.4MHz - BW20MHz - Chain1


## Emissions Mask (10MHz Bandwidth)

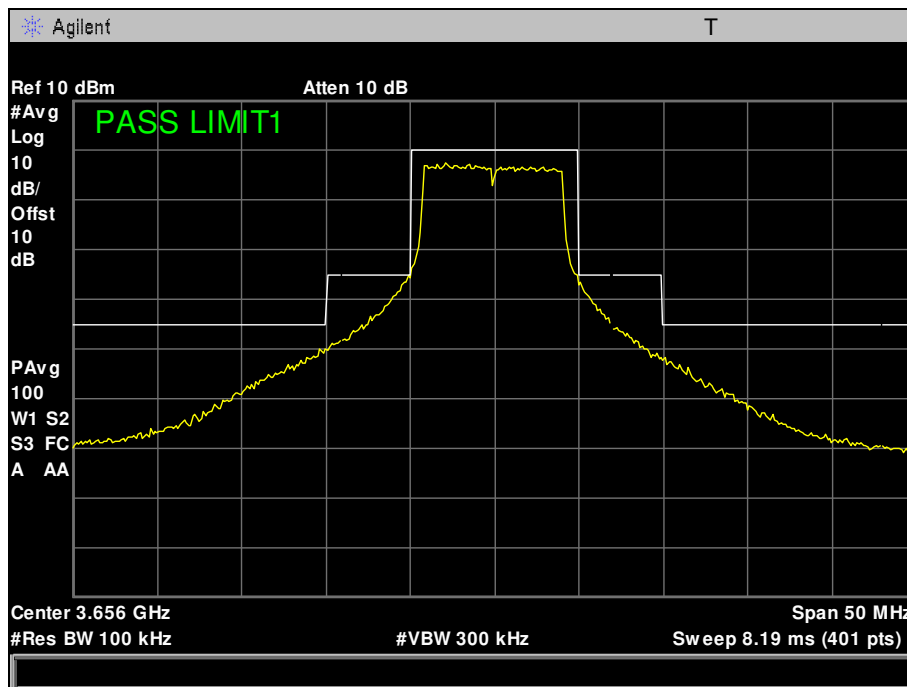


Plot 79. Emission Mask - Low - 3655.9MHz - BW10MHz - Chain0

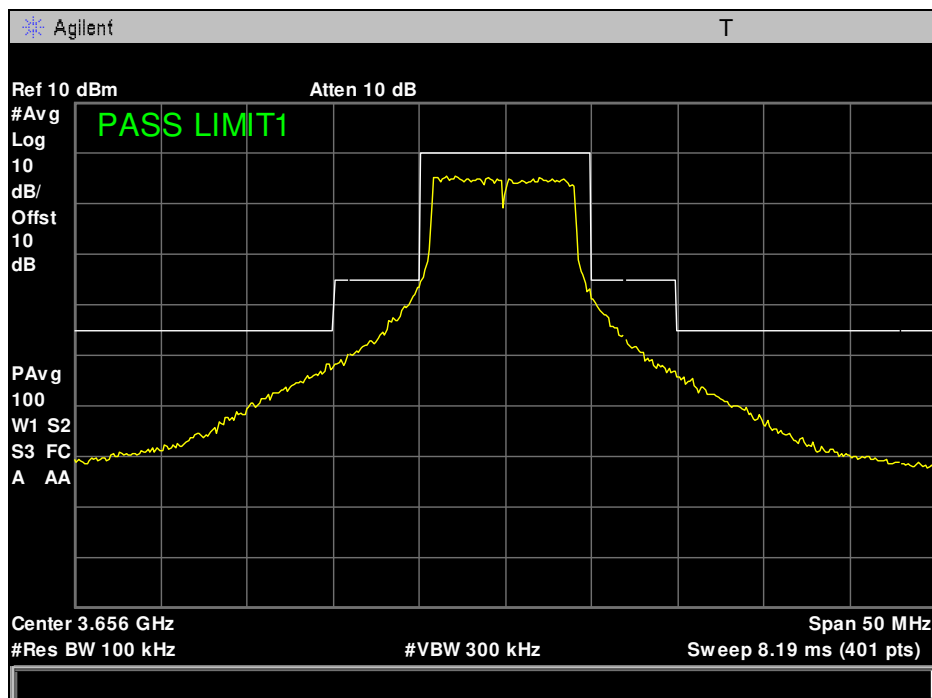


Plot 80. Emission Mask - Low - 3655.9MHz - BW10MHz - Chain1

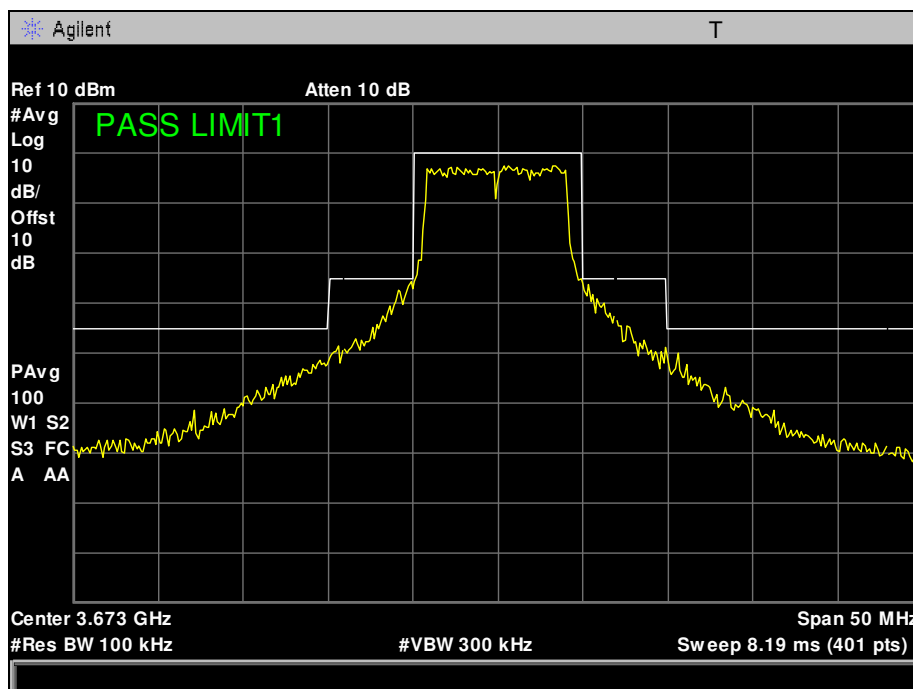


Plot 81. Emission Mask - Mid - 3673.4MHz - BW10MHz - Chain0

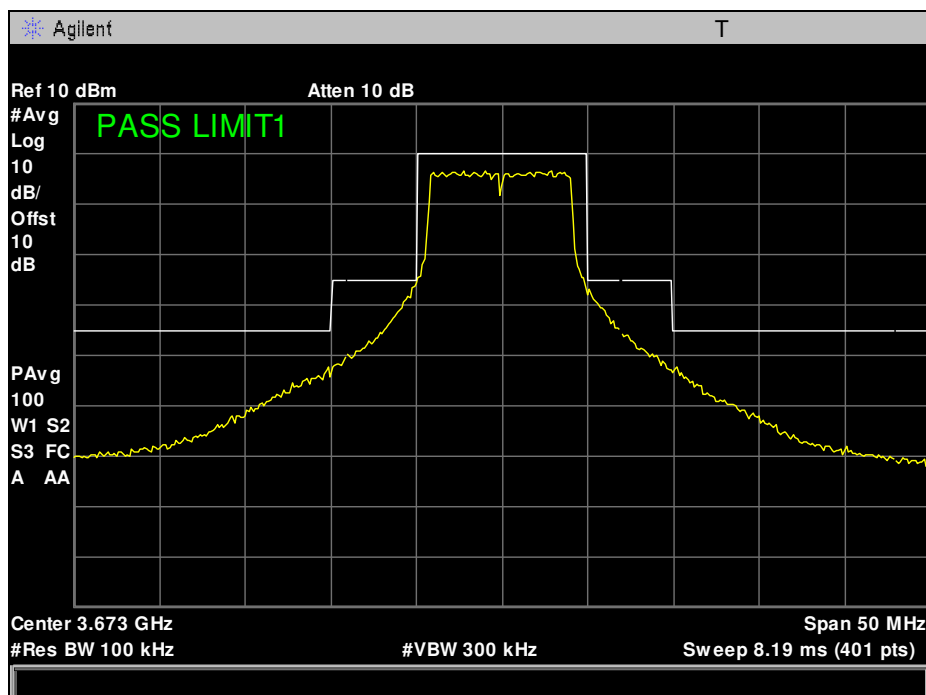

Plot 82. Emission Mask - Mid - 3673.4MHz - BW10MHz - Chain1

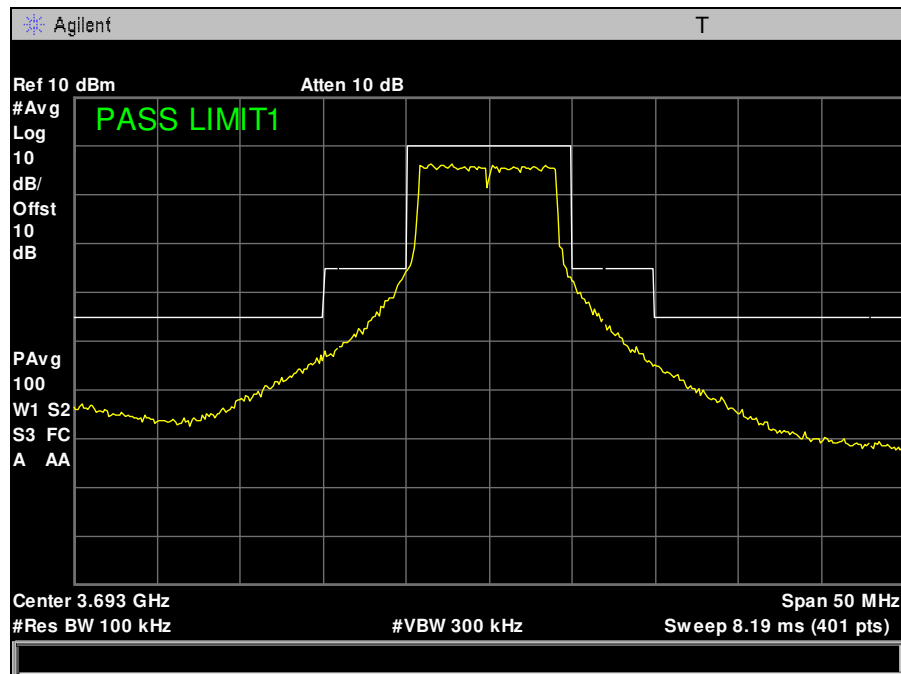


Plot 83. Emission Mask - High - 3693.4MHz - BW10MHz - Chain0

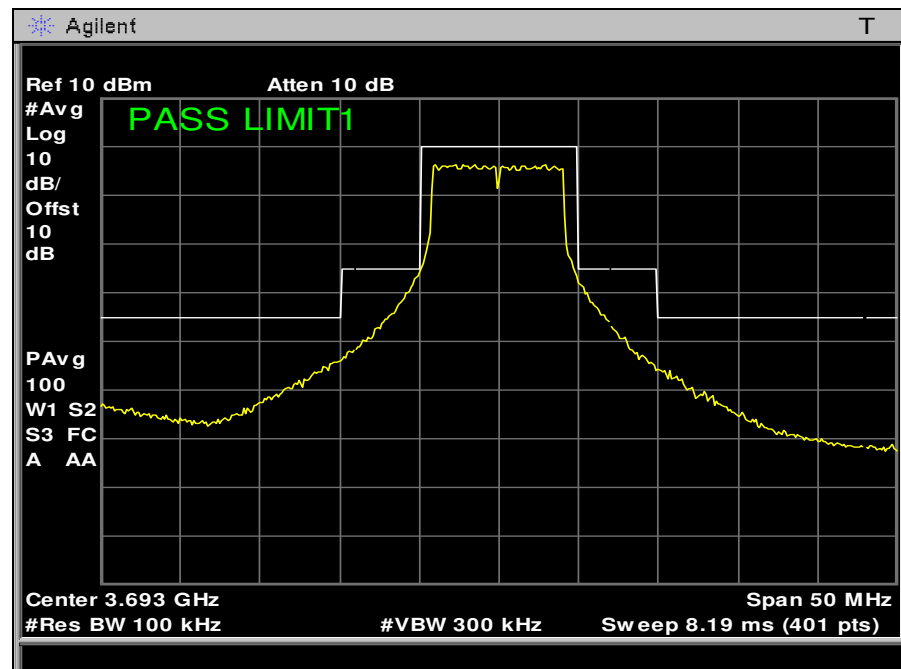


Plot 84. Emission Mask - High - 3693.4MHz - BW10MHz - Chain1


## Conducted Spurious Emissions (20MHz Bandwidth)

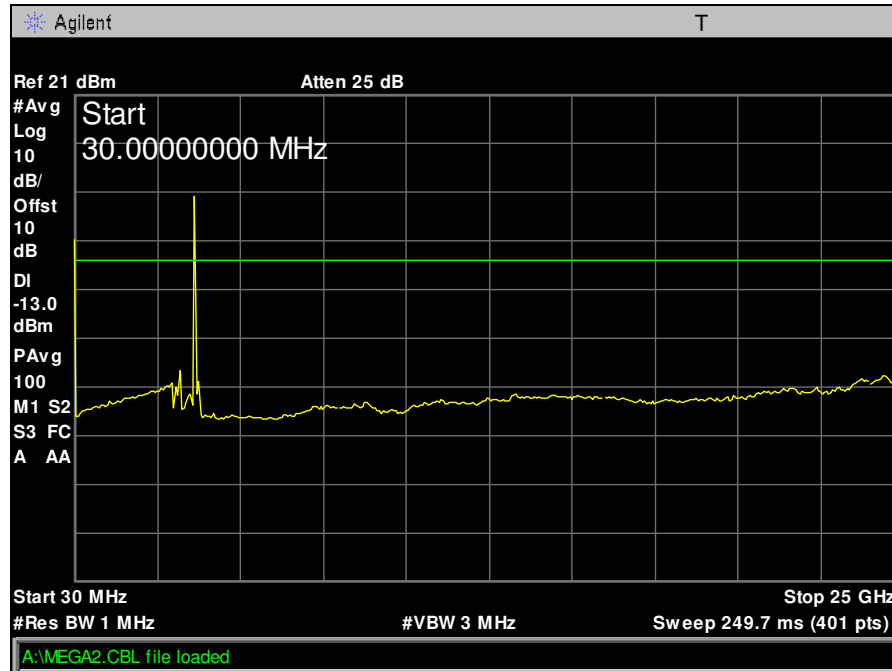


Plot 85.. Conducted Spurious Emissions - Low - 3663.4MHz - BW20MHz - Chain0

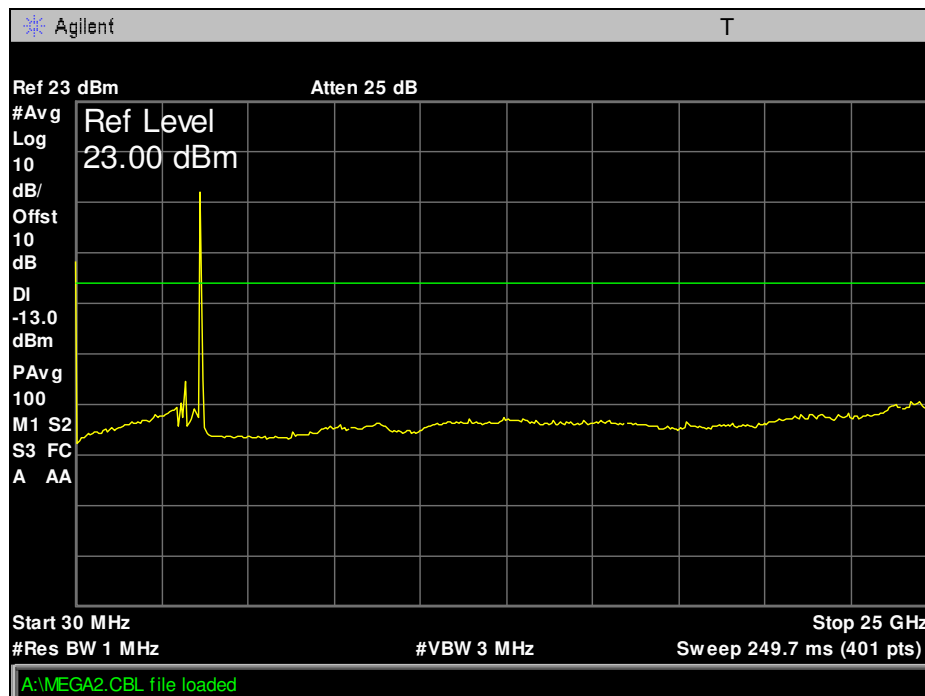


Plot 86. Conducted Spurious Emissions - Low - 3663.4MHz - BW20MHz - Chain1

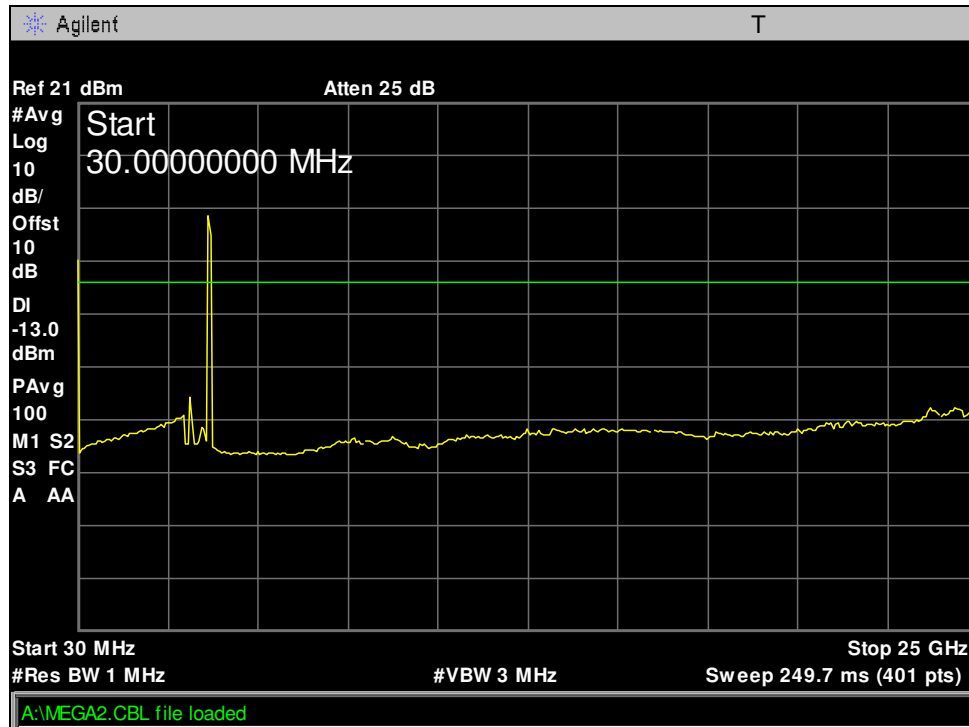


Plot 87. Conducted Spurious Emissions - Mid - 3678.4MHz - BW20MHz - Chain0

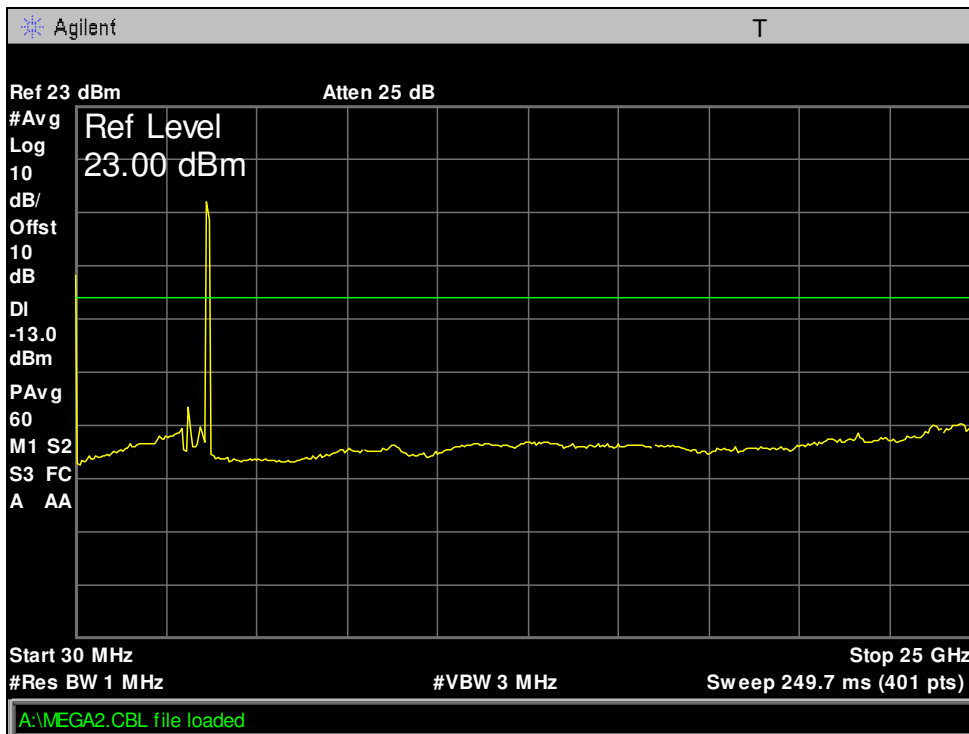

Plot 88. Conducted Spurious Emissions - Mid - 3678.4MHz - BW20MHz - Chain1

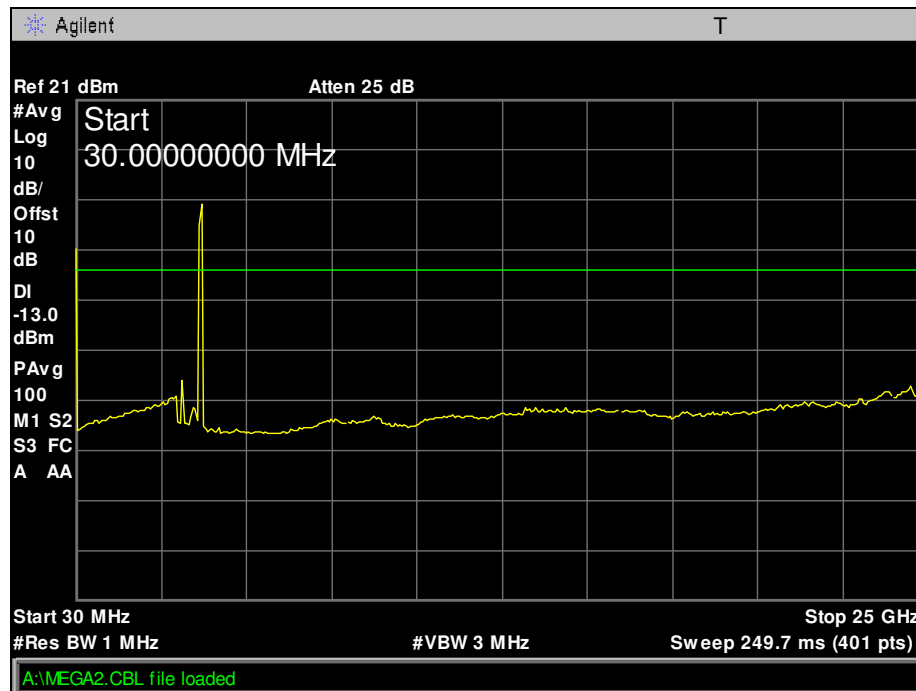


Plot 89. Conducted Spurious Emissions - High - 3688.4MHz - BW20MHz - Chain0

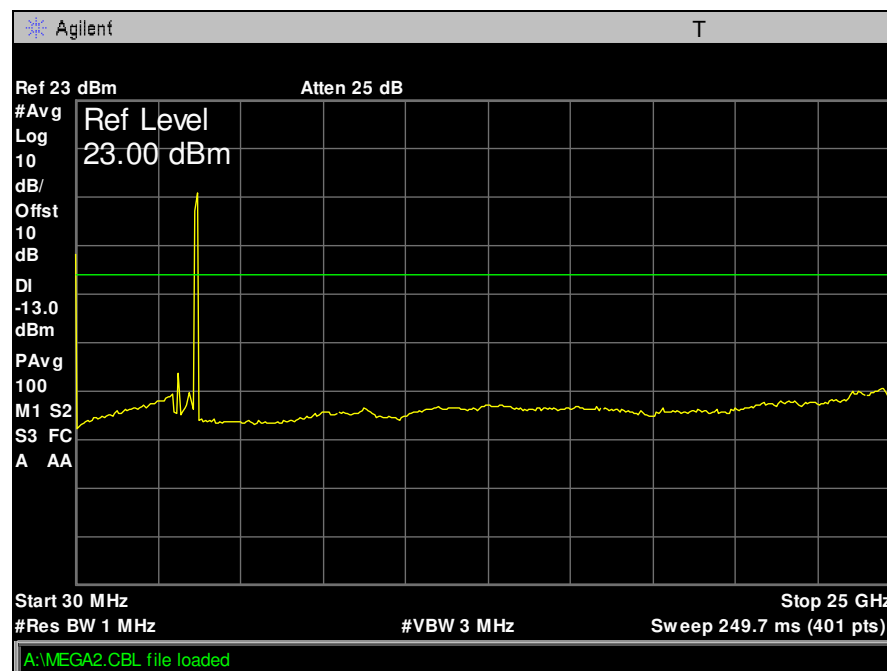


Plot 90. Conducted Spurious Emissions - High - 3688.4MHz - BW20MHz - Chain1


## Conducted Spurious Emissions (10MHz Bandwidth)

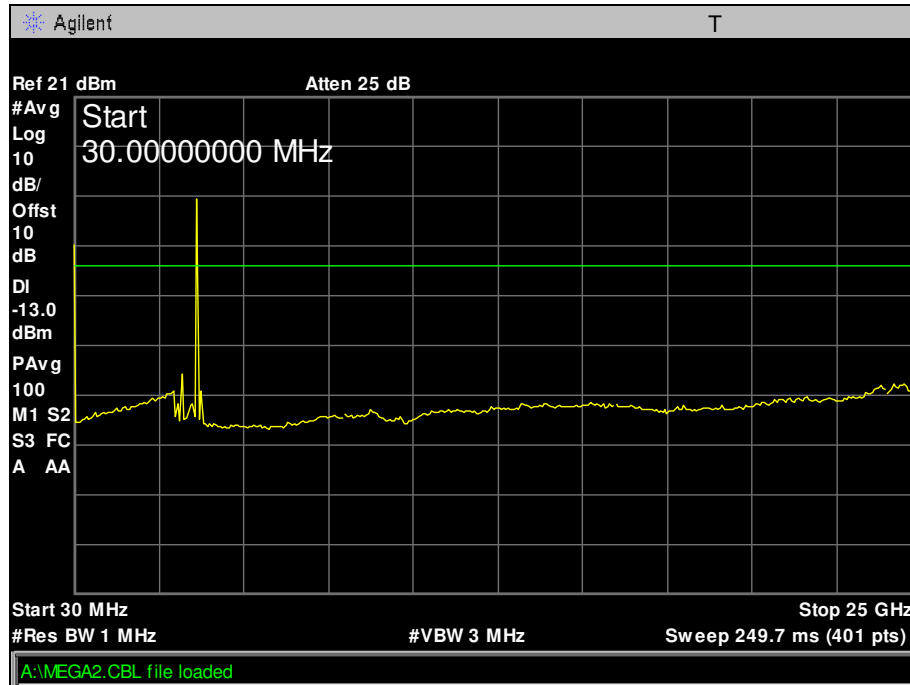


Plot 91. Conducted Spurious Emissions - Low - 3655.9MHz - BW10MHz - Chain0

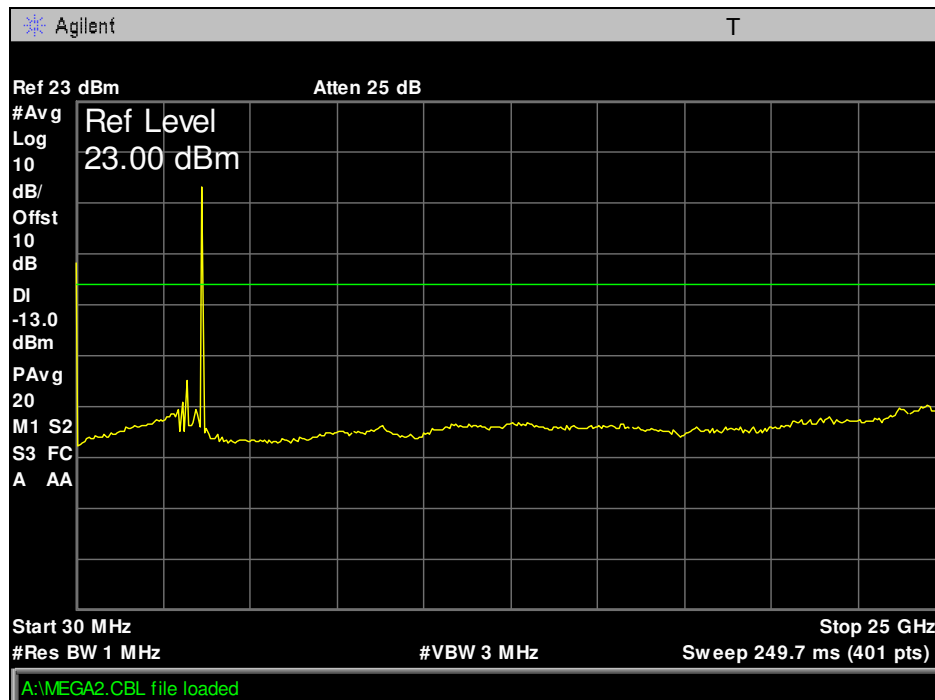


Plot 92. Conducted Spurious Emissions - Low - 3655.9MHz - BW10MHz - Chain1

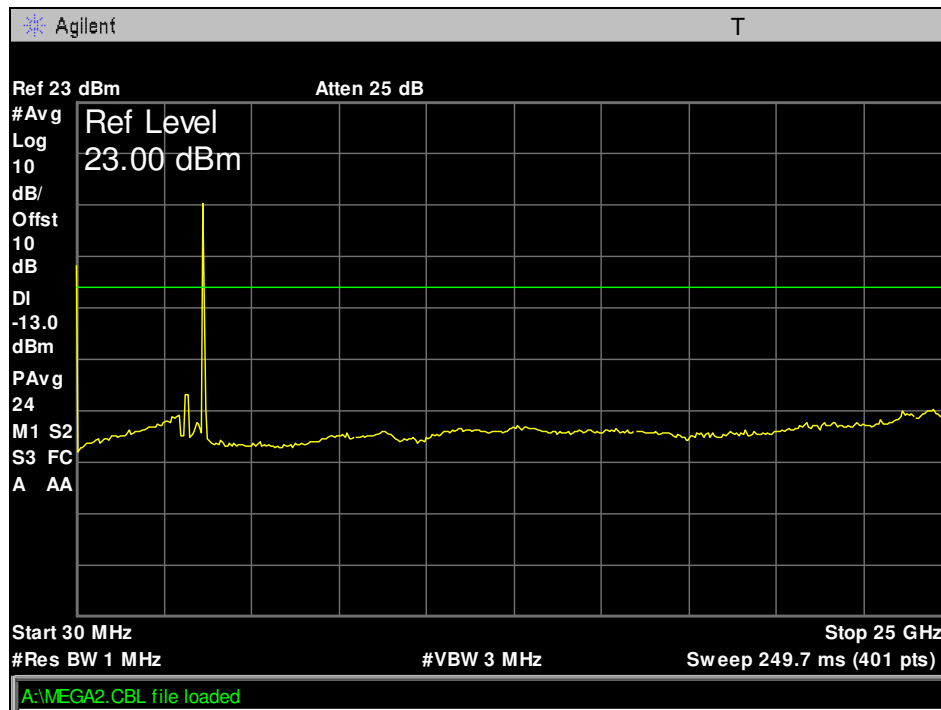


Plot 93. Conducted Spurious Emissions - Mid - 3673.4MHz - BW10MHz - Chain0

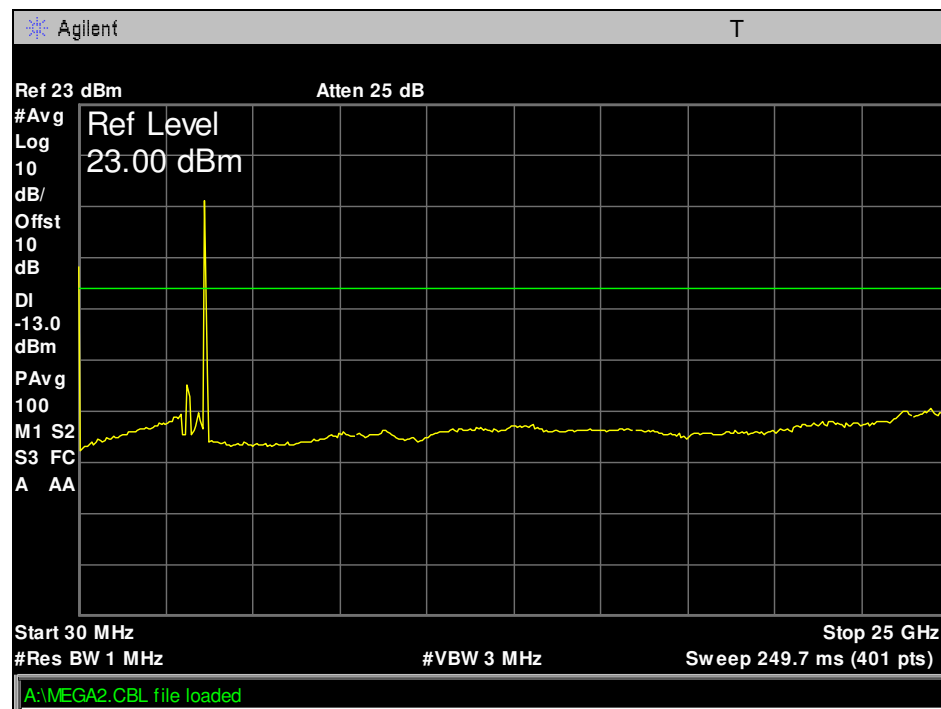

Plot 94. Conducted Spurious Emissions - Mid - 3673.4MHz - BW10MHz - Chain1

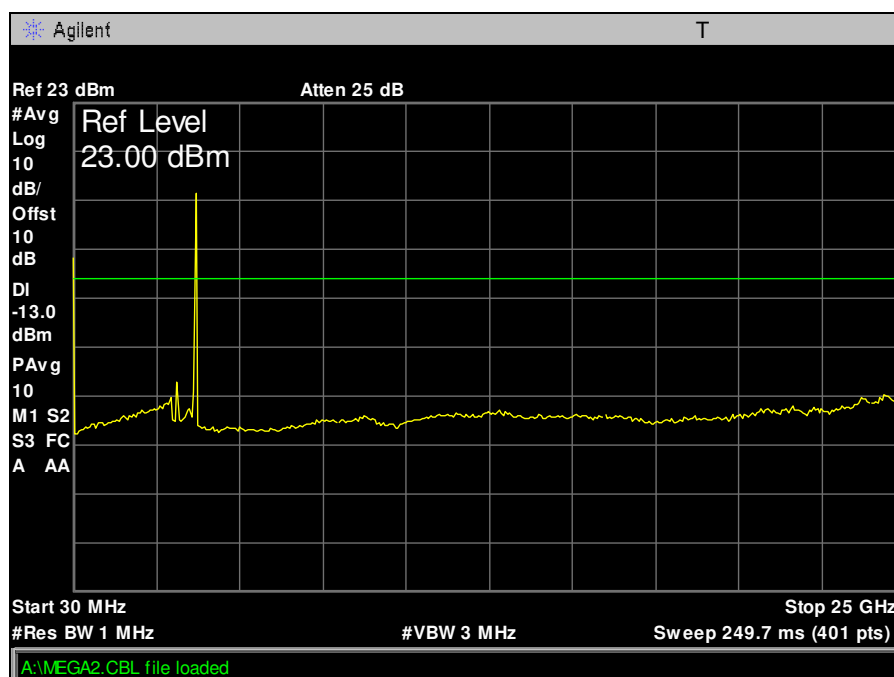

Plot 95. Conducted Spurious Emissions - High - 3693.4MHz - BW10MHz - Chain0

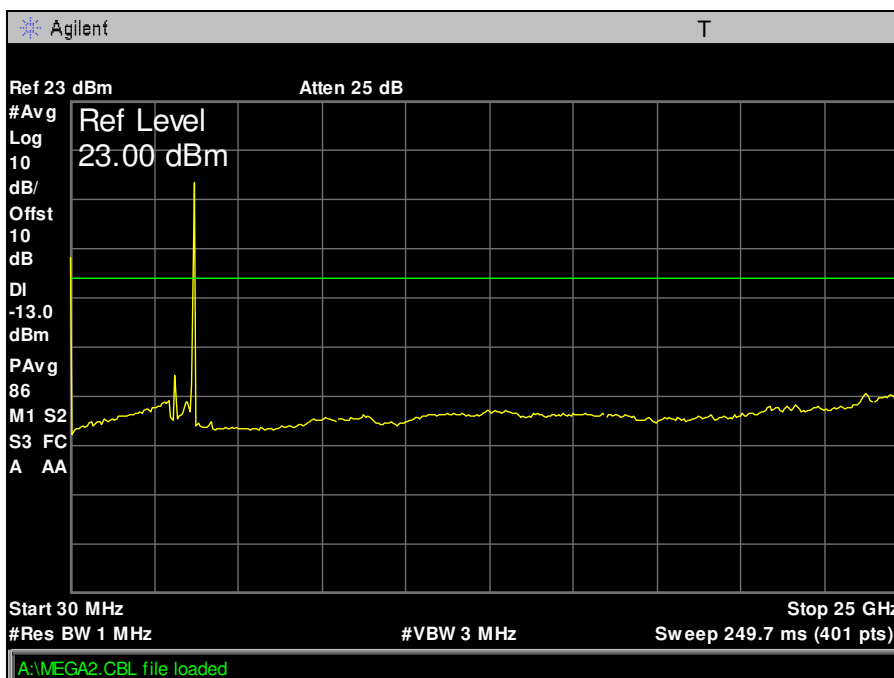

Plot 96. Conducted Spurious Emissions - High - 3693.4MHz - BW10MHz - Chain1



## 5.2. Radiated Emissions (Substitution Method)

**Test Requirement(s):** §2.1053 and ANSI/TIA-603-D:2010

**Test Procedures:** As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* were made in accordance with the procedures of **ANSI/TIA-603-D:2010** "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".


Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber. The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range. There are two power settings and this radiated spurious test was performed with the higher power setting. The EUT was rotated about 360<sup>0</sup> and the receiving antenna scanned from 1-4m in order to capture the maximum emission. For harmonic frequencies falling in restricted bands the corrected field strength was performed using antenna factor and cable loss method. For all other notable spurious emissions a calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated. The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10<sup>th</sup> or 40GHz, which ever was the lesser, were investigated.

**Test Results:** Equipment complies with the radiated emissions requirement.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** 07/01/2016


## Low Channel (20MHz)

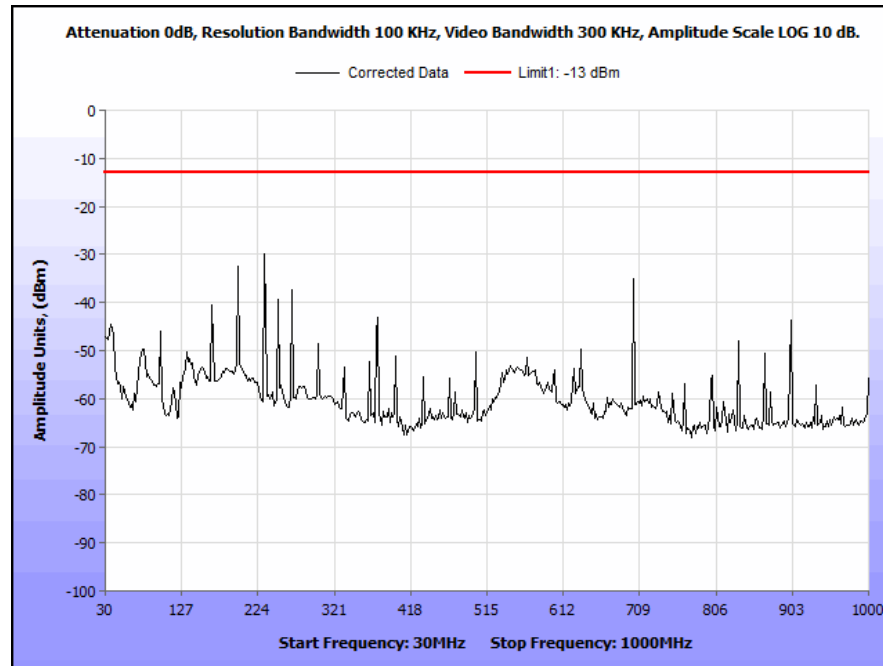

Plot 97. Radiated Emissions, 20MHz BW, Low Channel, 30MHz-1GHz

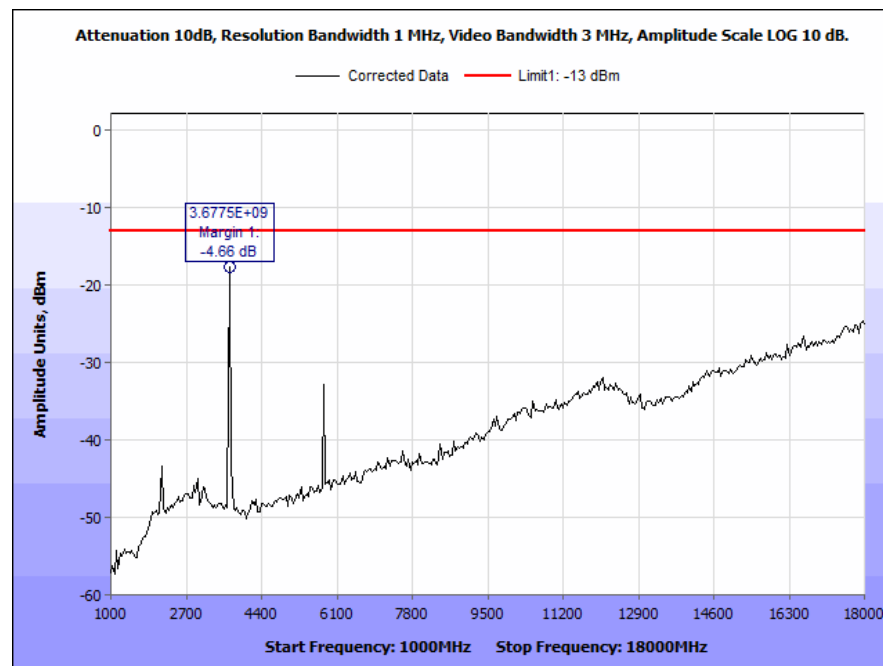


Plot 98. Radiated Emissions, 20MHz BW, Low Channel 1-18GHz

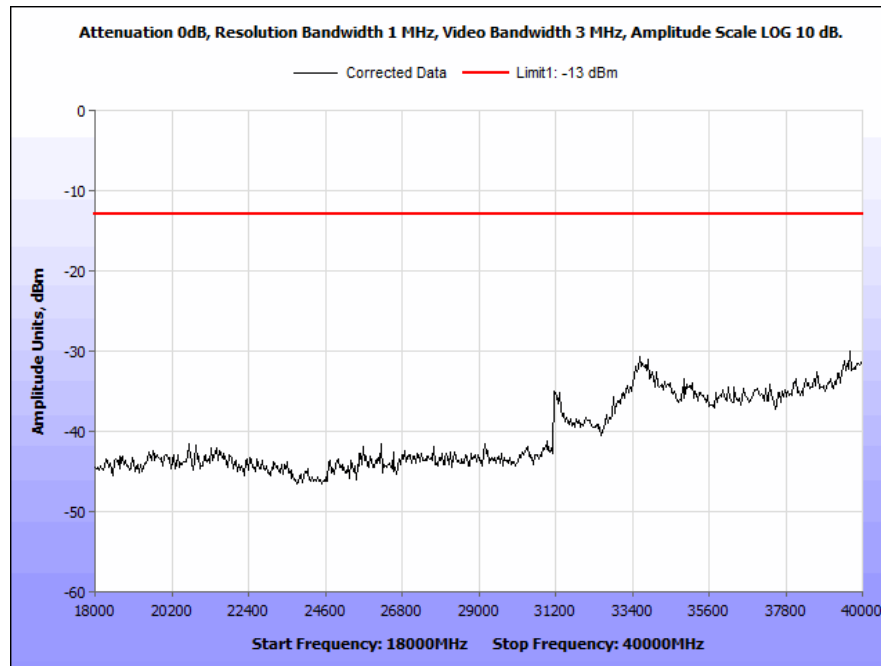


**Plot 99. Spurious TX Emissions 20 MHz BW, Low Channel 18GHz - 40GHz**


## Mid Channel (20MHz)

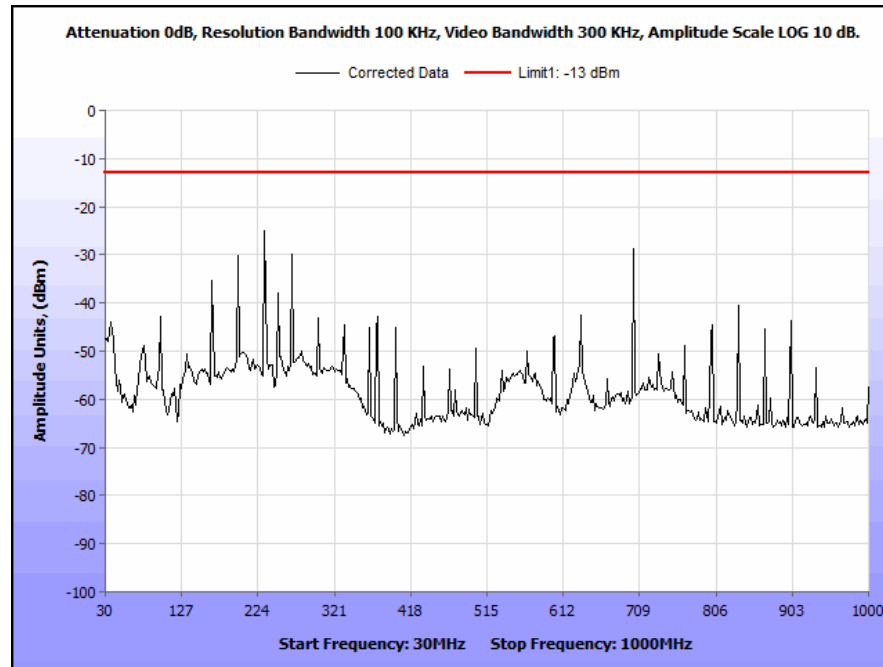

Plot 100. Radiated Emissions, 20MHz BW, Mid Channel 30MHz-1GHz

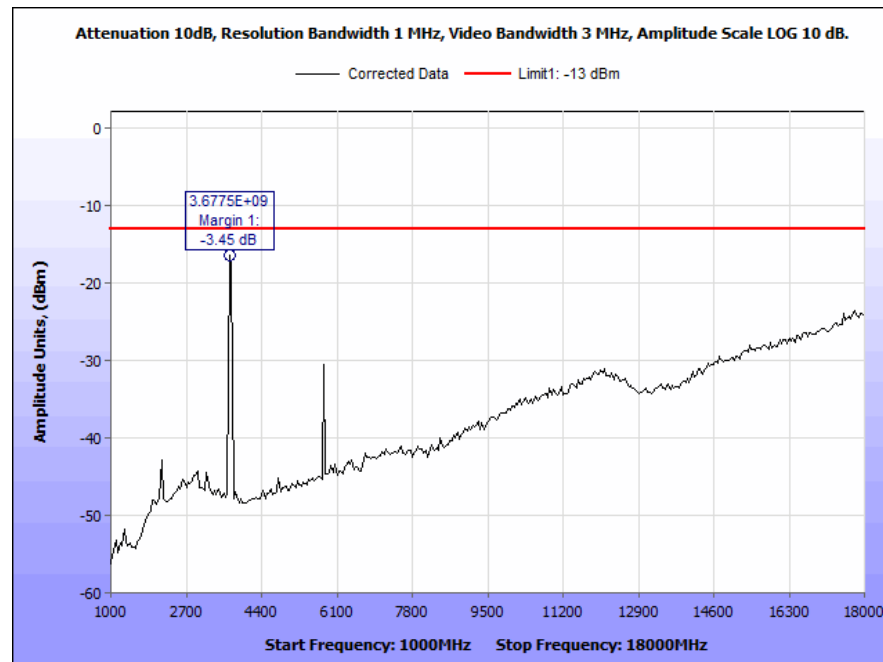


Plot 101. Radiated Emissions, 20MHz BW, Mid Channel 1-18GHz

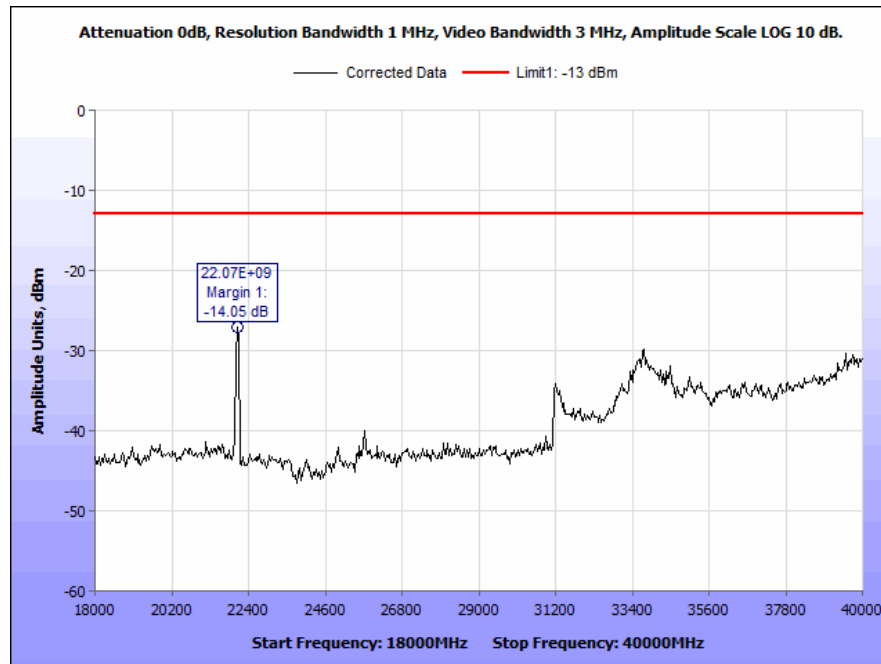


Plot 102. Spurious TX Emissions 20 MHz BW, Mid Channel 18GHz - 40GHz


## High Channel (20MHz)

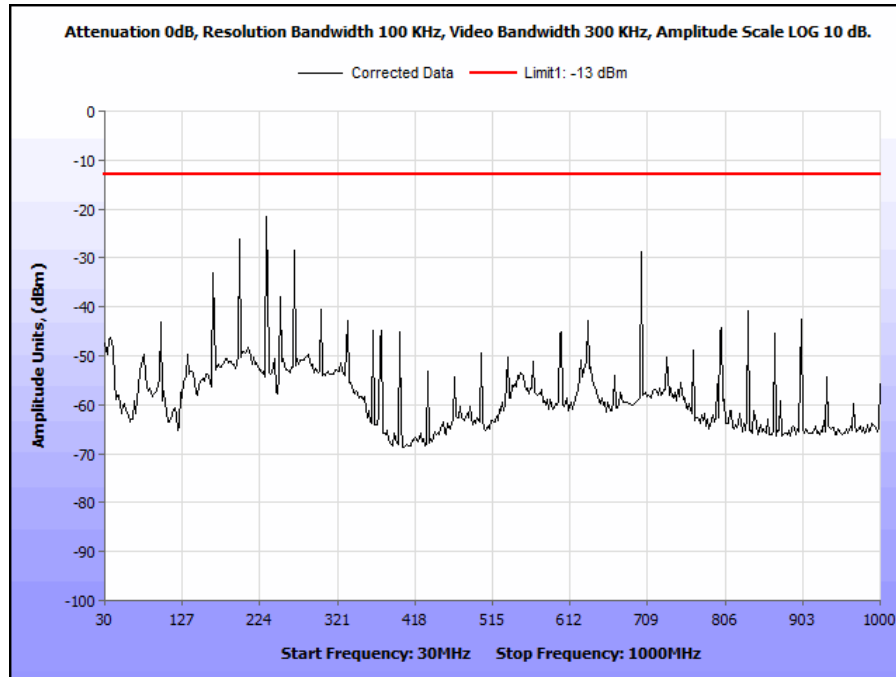

Plot 103. Radiated Emissions, 20MHz BW, High Channel 30MHz-1GHz

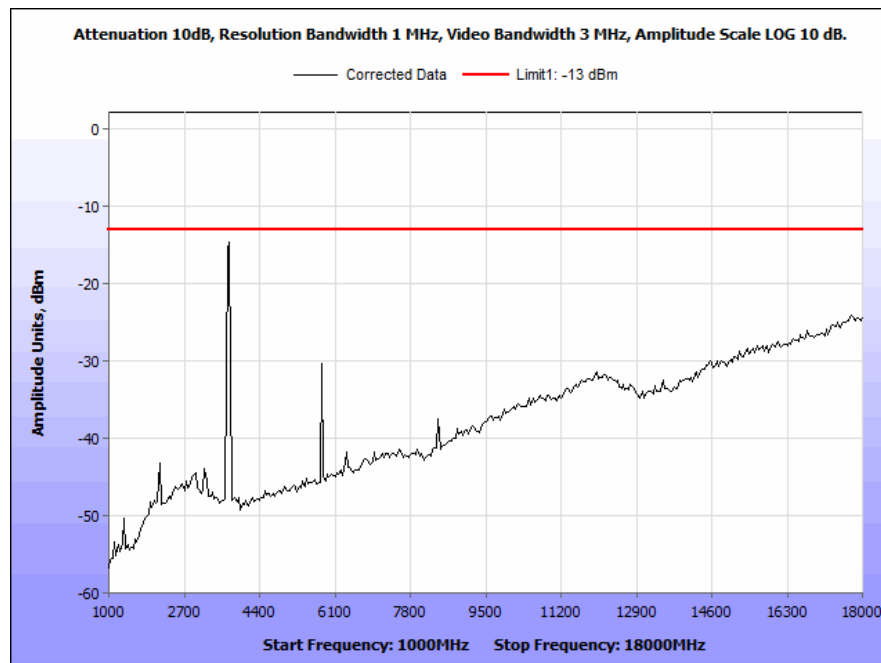


Plot 104. Radiated\_Emissions\_20MHz\_BW\_High\_Channel\_1-18GHz

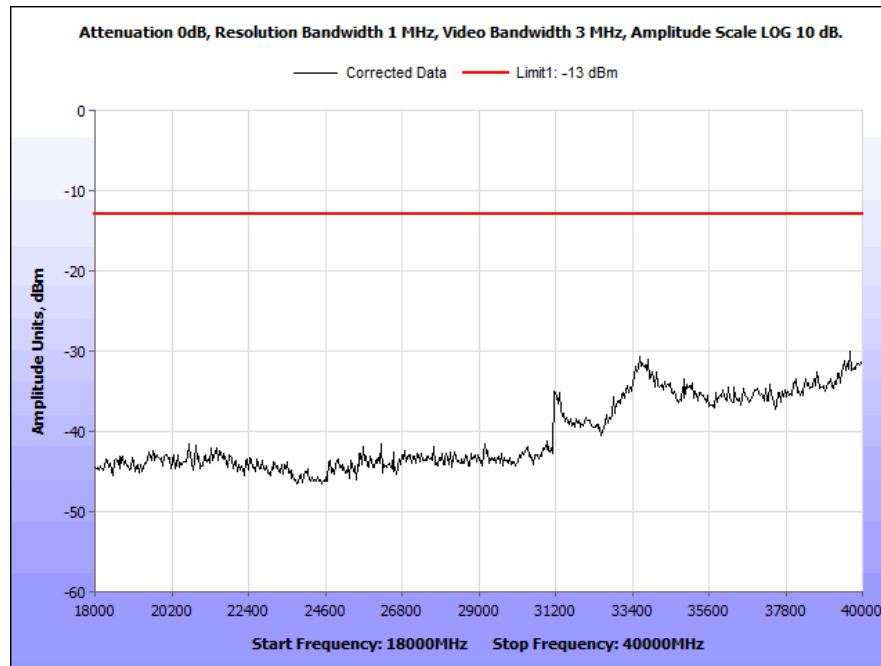


Plot 105. Spurious TX Emissions 20 MHz BW, High Channel 18GHz - 40GHz


## Low Channel (10MHz)

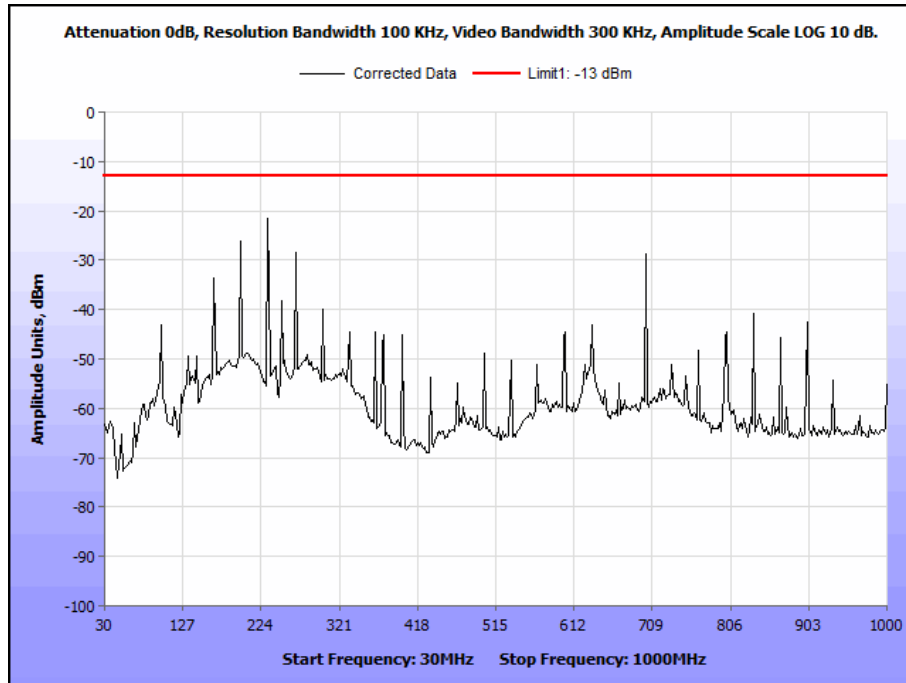

Plot 106. Radiated Emissions, 10MHz BW, Low Channel 30MHz-1GHz

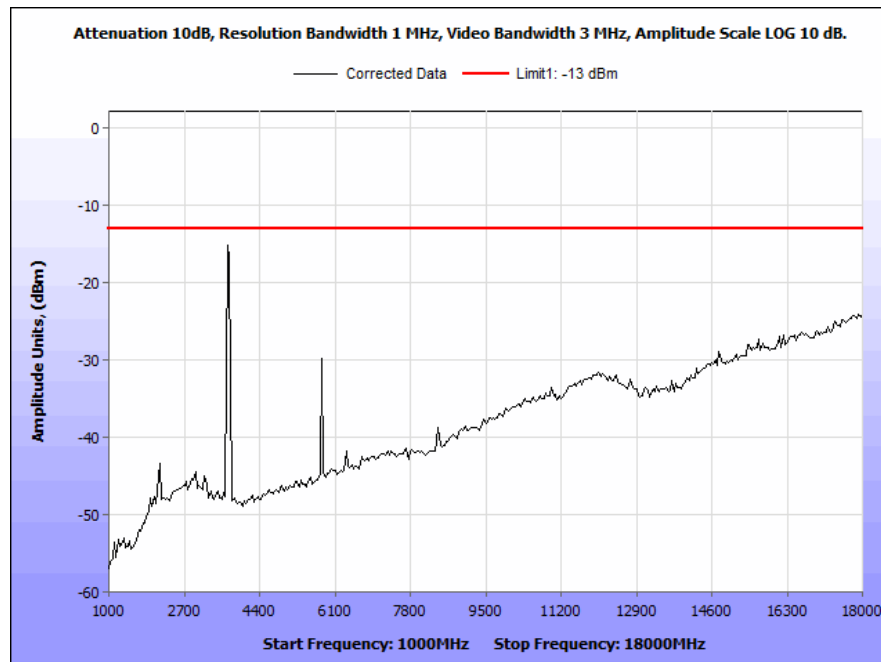


Plot 107. Radiated Emissions, 10MHz BW, Low Channel 1-18GHz

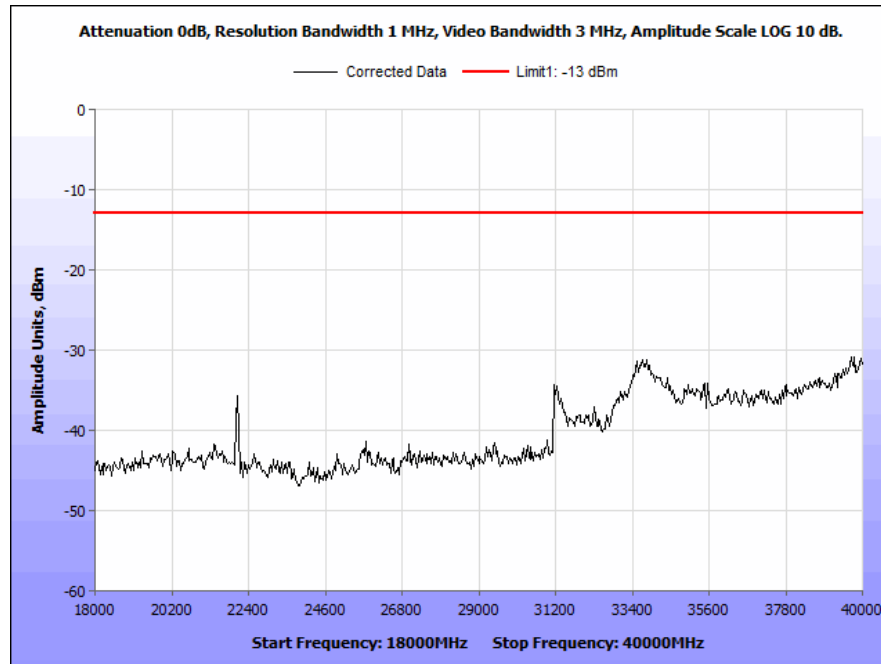


Plot 108. Spurious TX Emissions 10 MHz BW, Low Channel 18GHz - 40GHz


## Mid Channel (10MHz)

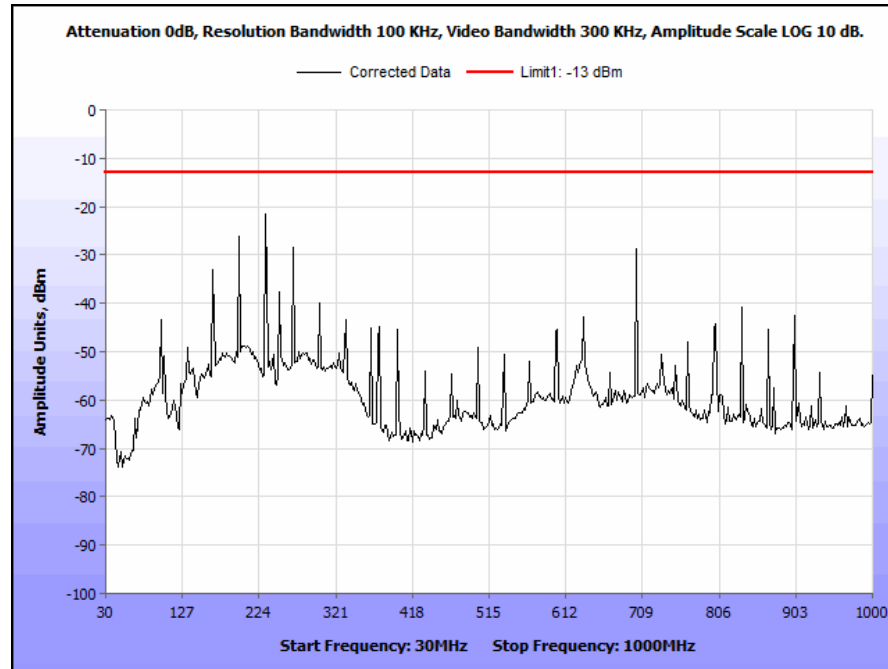

Plot 109. Radiated Emissions 10MHz BW, Mid Channel 30MHz-1GHz

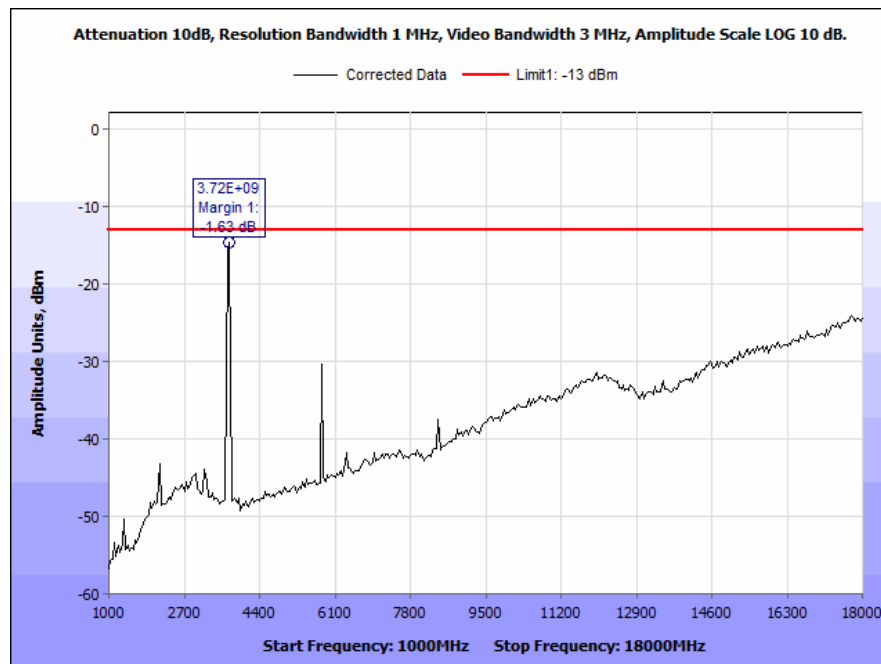


Plot 110. Radiated Emissions, 10MHz BW, Mid Channel 1-18GHz

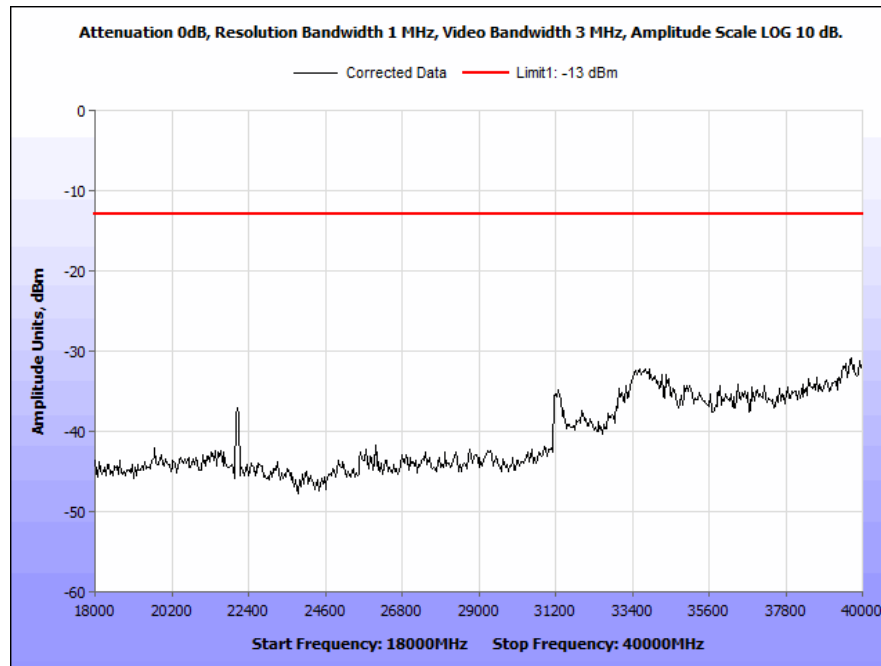


Plot 111. Spurious TX Emissions 10 MHz BW, Mid Channel 18GHz - 40GHz


## High Channel (10MHz)

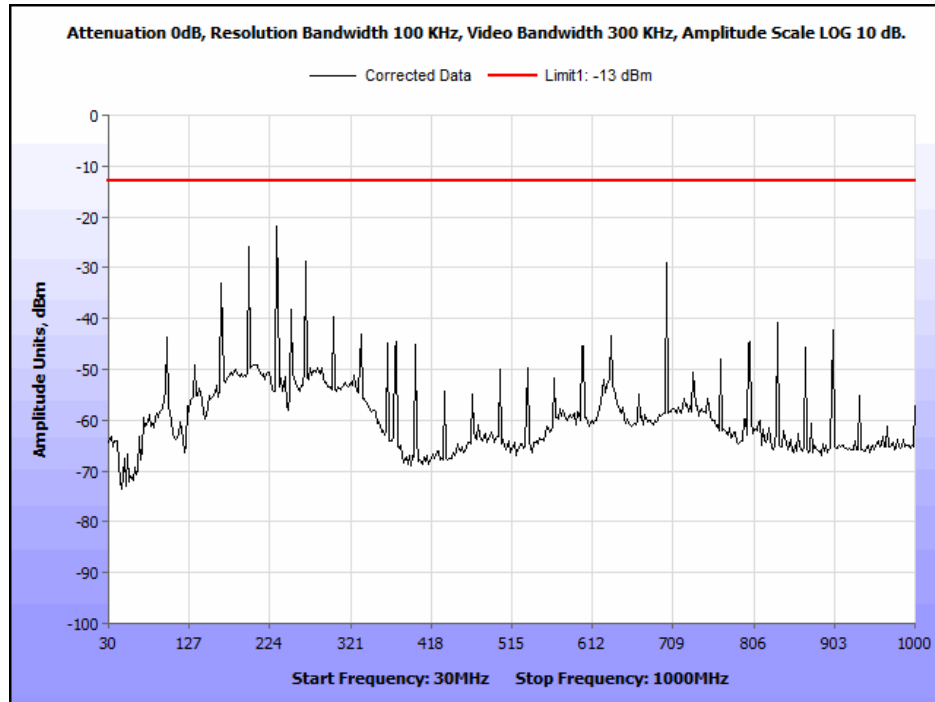

Plot 112. Radiated Emissions, 10MHz BW, High Channel 30MHz-1GHz

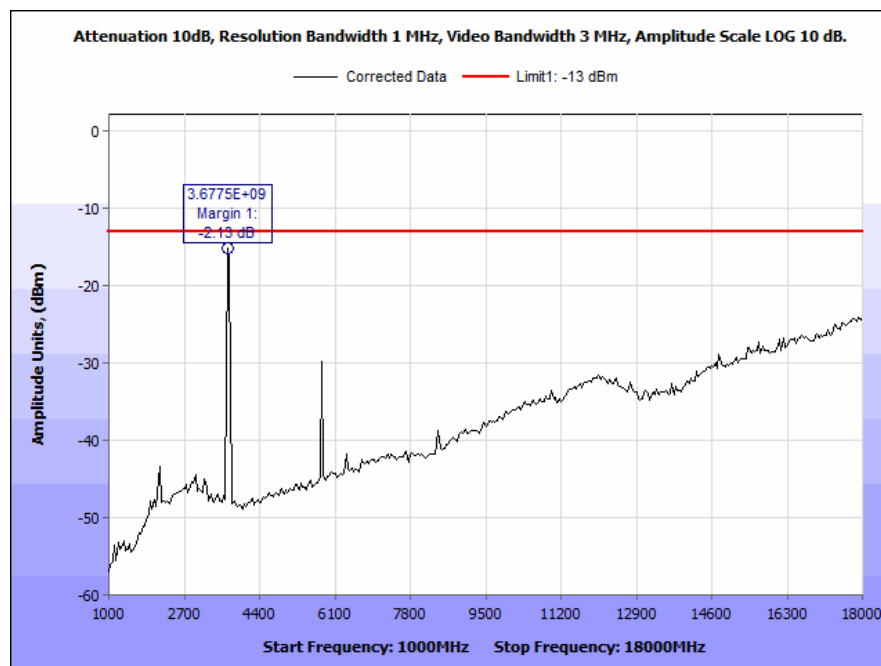


Plot 113 Radiated Emissions, 10MHz BW, High Channel 1-18GHz

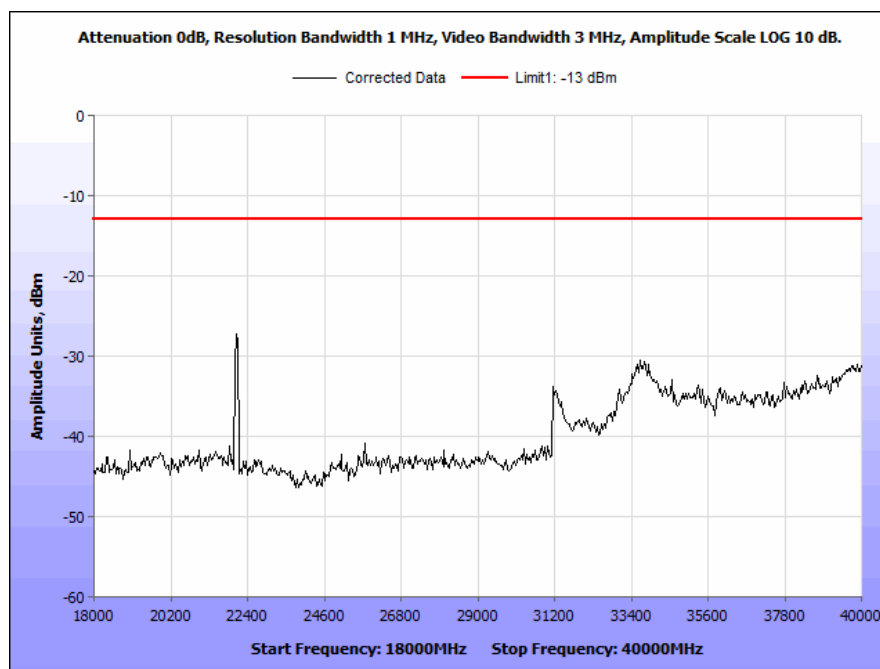


Plot 114. Spurious TX Emissions 10 MHz BW, High Channel 18GHz - 40GHz


## Radiated Emissions Spurious Test Setup

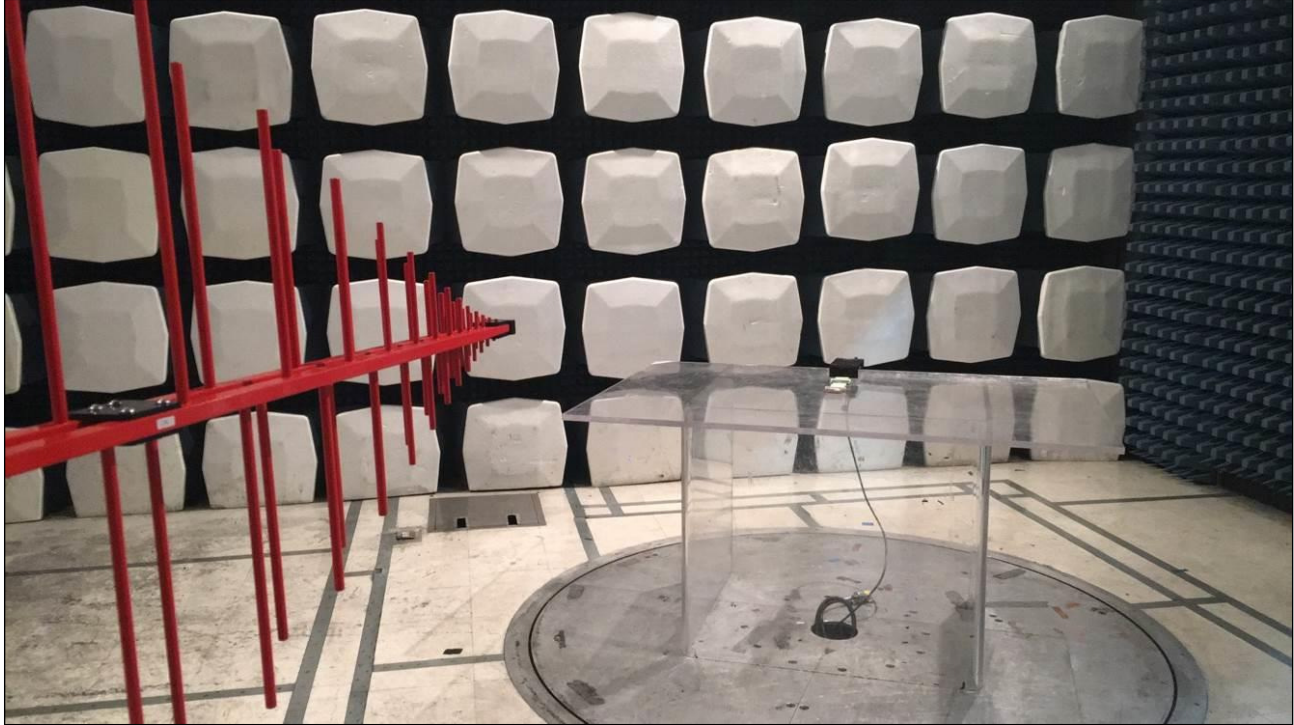

**Photograph 1. Radiated Emission Spurious Test Setup, Below 1 GHz**

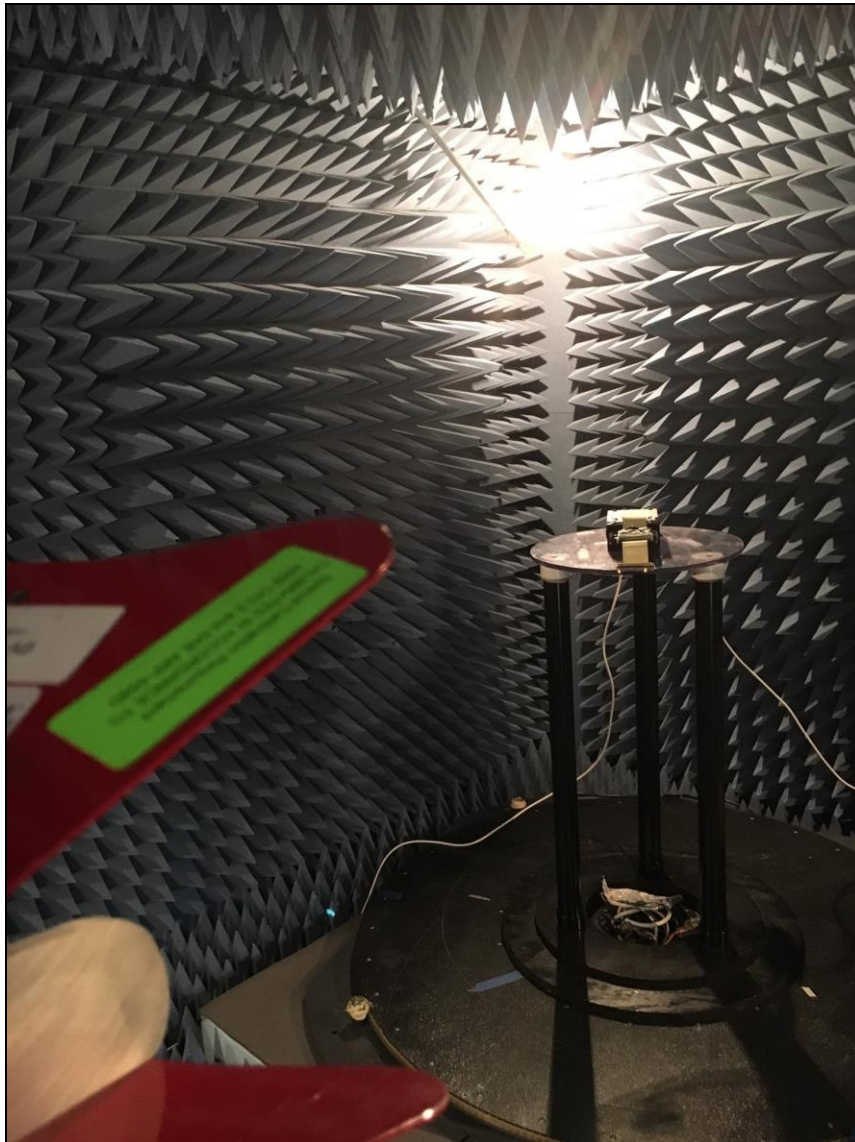

**Photograph 2. Radiated Emission Spurious Test Setup, 1 GHz – 18 GHz**

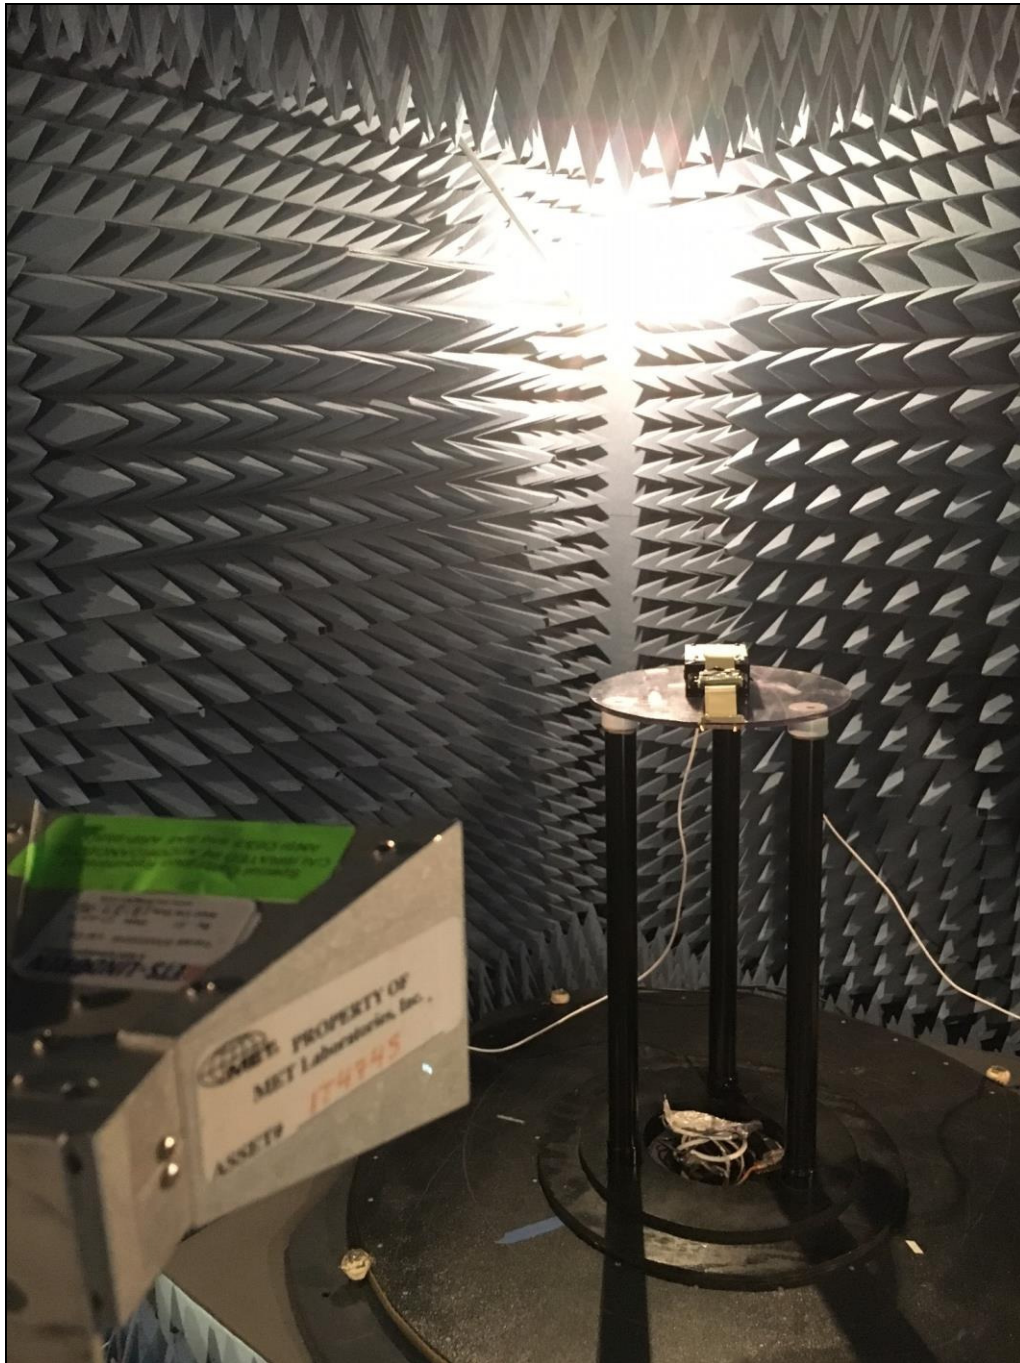

**Photograph 3. Radiated Emission Spurious Test Setup, 18 GHz – 40 GHz**



## 6. Electromagnetic Compatibility Frequency Stability Requirements

### 6.1. Frequency Stability

**Test Requirement(s):** §2.1055 and §90.213

**Test Procedures:** Testing for this frequency stability was not performed as data was used from original grant report.

**Test Results:** Equipment complies with Section 2.1055 and 90.213.  
Note: Test results were obtained from original grant report (FCCID VKV-F36N)  
See attached Report.

**Test Engineer(s):** Djed Mouada

**Test Date(s):** 04/21/16

## 7. Electromagnetic Compatibility Frequency Stability Requirements

### 7.1. RF Exposure Requirements

**RF Exposure Requirements:** §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b).

| FCC             |            |           |                 |                   |                                    |                             |         |               |        |
|-----------------|------------|-----------|-----------------|-------------------|------------------------------------|-----------------------------|---------|---------------|--------|
| Frequency (MHz) | EIRP (dBm) | EIRP (mW) | Ant. Gain (dBi) | Ant. Gain numeric | Pwr. Density (mW/cm <sup>2</sup> ) | Limit (mW/cm <sup>2</sup> ) | Margin  | Distance (cm) | Result |
| 3693.4          | 28.8573    | 768.652   | 5.01            | 3.17              | 0.48469                            | 1                           | 0.51531 | 20            | Pass   |
| 3678.4          | 29.9273    | 983.4     | 7.01            | 5.023             | 0.98279                            | 1                           | 0.01721 | 20            | Pass   |

The module is qualified with two antennas, 2 dBi and 4 dBi. The 4dBi is for use on a mobile / non-body worn application under the following conditions:

- 1) Antennas are not co-located (20 cm minimum separation)
- 2) User is 20 cm away from the equipment



# Test Equipment



## 8. Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

| MET Asset # | Equipment                                     | Manufacturer         | Model                 | Last Cal Date | Cal Due Date |
|-------------|-----------------------------------------------|----------------------|-----------------------|---------------|--------------|
| 1T6658      | SPECTRUM ANALYZER                             | AGILENT              | E4407B                | 12/09/2015    | 12/09/2016   |
| 1T4497      | SIGNAL GENERATOR                              | AGILENT TECHNOLOGIES | E4432B                | 10/06/2014    | 04/06/2016   |
| 1T4483      | ANTENNA; HORN                                 | ETS-LINDGREN         | 3117                  | 10/08/2015    | 04/08/2017   |
| 1T4771      | PSA SPECTRUM ANALYZER                         | AGILENT TECHNOLOGIES | E4446A                | 11/25/2014    | 05/25/2016   |
| 1T4300B     | SEMI-ANECHOIC 3M CHAMBER # 1 D (2043A-1) (IC) | EMC TEST SYSTEMS     | NONE                  | 01/11/2015    | 01/11/2018   |
| 1T4409      | EMI RECEIVER                                  | ROHDE & SCHWARZ      | ESIB7                 | 10/29/2014    | 10/29/2016   |
| 1T4751      | ANTENNA - BILOG                               | SUNOL SCIENCES       | JB6                   | 2/26/2016     | 8/26/2017    |
| 331T4442    | PRE-AMPLIFIER, MICROWAVE                      | MITEQ                | AFS42-01001800-30-10P | SEE NOTE      |              |

**Table 6. Test Equipment**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

# Certification & User's Manual Information

## 9. Certification Label & User's Manual Information

### 9.1. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- 
- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a provision that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart Y — Equipment Authorization Procedures:**

**§ 2.901 Basis and Purpose**

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant, whichever is applicable.

**§ 2.902 Certification.**

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

**§ 2.948 Description of measurement facilities.**

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## 9.2. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### **§ 15.21 Information to user.**

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

#### **§ 15.105 Information to the user.**

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Rajant Corporation  
Rajant dBii F36N PRO 3663.4MHz Mini-PCI Radio Module

Electromagnetic Compatibility  
End of Report  
CFR Title 47 Part 90 Subpart Z

---

## End of Report