


DM2-2400/1575

Dual-band Low Profile "Dome" Antenna ISM with GPS


Mobile Mark Communication Antennas

3900-B RIVER ROAD, SCHILLER PARK, IL 60176
PHONE: (847) 671-6690 * FAX (847) 671-6711
VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM

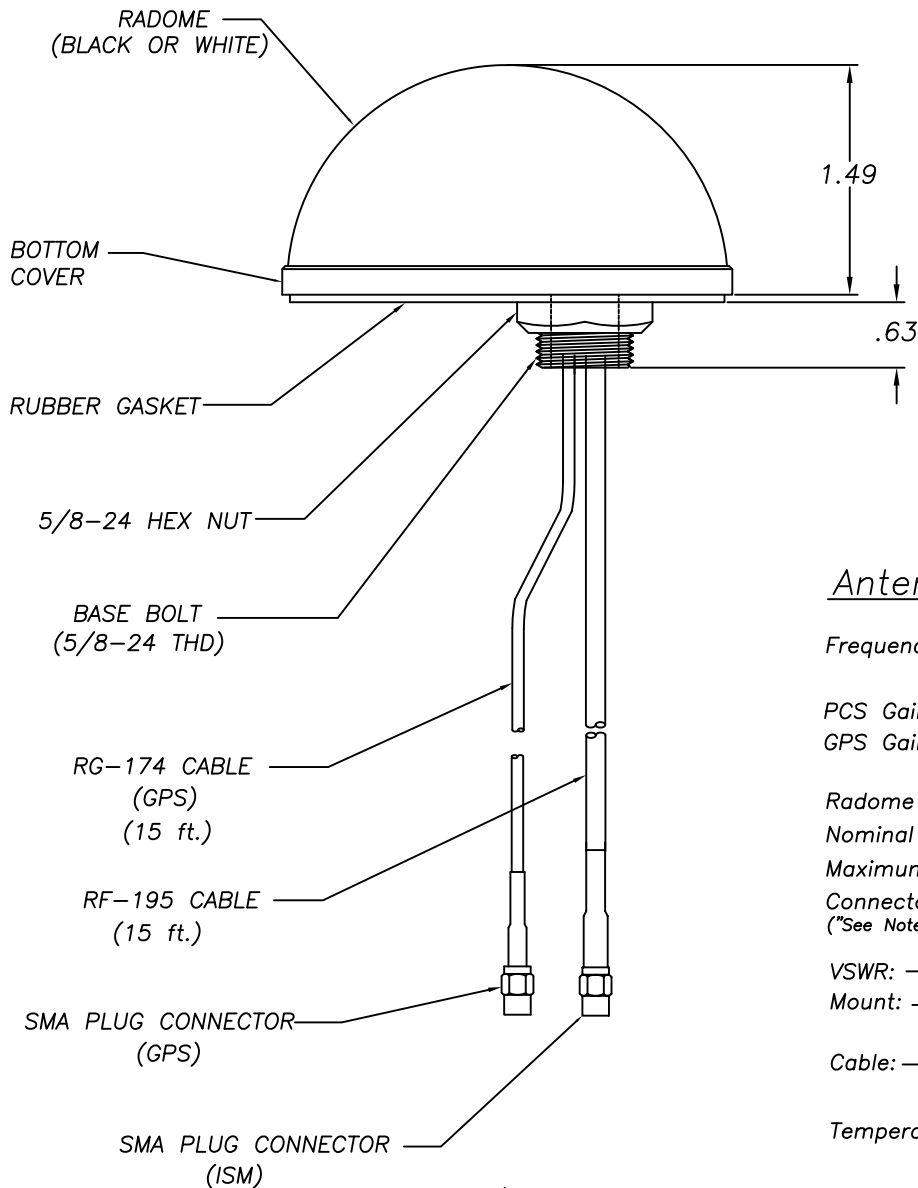


Antenna Specifications:

Frequencies:	2400 MHz Band (ISM) 1575 $\pm$ 2 MHz (GPS Band)
PCS Gain:	2.5 dBi
GPS Gain:	26 dB active Amplifier 5 dBi Antenna
Radome Material:	Black or White ABS Plastic
Nominal Impedance:	50 OHM
Maximum Power:	10 Watts
Connector:	SMA Plug (ISM) ("See Note") SMA Plug (GPS)
VSWR:	2:1 max over all bands
Mount:	3/4" threads for up to 3/8" thick metal
Cable:	15 ft. RF-195 (ISM) 15 ft. RG-174 (GPS)
Temperature:	-40C to +85C

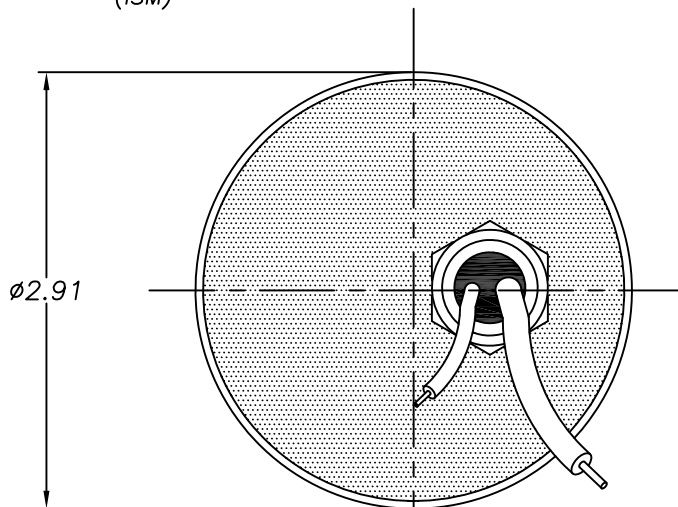

BOTTOM VIEW

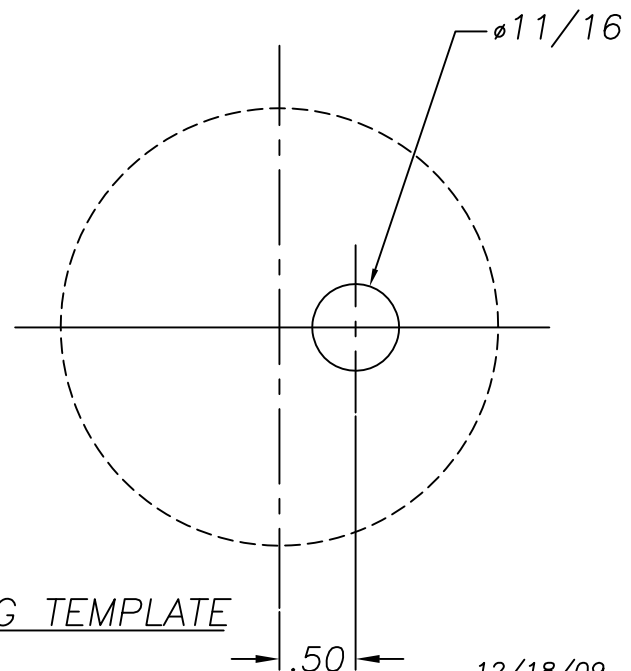

DRILLING TEMPLATE