FCC Part 15 Subpart C §15.247

Test Report

Equipment Under Test	**HDMI Dongle**
Model Name	**VUDU SPARK**
Applicant	**Inkel Corporation.**
FCC ID	**VNH-T001M**
Manufacturer	**Inkel Corporation.**
Date of Test(s)	**2014. 10. 15 ~ 2014. 10. 27**
Date of Issue	**2014. 10. 28**

In the configuration tested, the EUT complied with the standards specified above.

Issue to	Issue by
Inkel Corporation. 93, Cheongjung-ro, Bupyeong-Gu, Incheon, 403-853, Korea Tel.: +82-32-650-6141 Fax: +82-32-650-6466	**MOVON CORPORATION** 498-2, Geumeo-ro, Pogok-eup, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 449-812 Tel.: +82-31-338-8837 Fax: +82-31-338-8847

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Revision history

Revision	Date of issue	Description	Revised by
--	August 28, 2014	Initial	--

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Table of contents

1. GENERAL INFORMATION 4

1.1. DETAILS OF APPLICANT 4
1.2. MANUFACTURER / FACTORY INFORMATION 4
1.3. SUMMARY OF TEST RESULTS 5

2. EUT DESCRIPTION 6

2.1. DECLARATIONS BY THE MANUFACTURER 6
2.2. DETAILS OF MODIFICATION 6

3. MEASUREMENT EQUIPMENT 7

4. TRANSMITTER RADIATED SPURIOUS EMISSIONS AND CONDUCTED SPURIOUS EMISSIONS 8

4.1. TEST SETUP 8
4.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS 8
4.2. LIMIT 9
4.3. TEST PROCEDURES 11
4.3.1. TEST PROCEDURES FOR RADIATED SPURIOUS EMISSIONS 11
4.3.2. TEST PROCEDURES FOR CONDUCTED SPURIOUS EMISSIONS 11
4.4. TEST RESULT 12
4.4.1. SPURIOUS RADIATED EMISSION 12
4.4.4. BAND EDGE 32
4.4.5. OUT OF BAND EMISSIONS IN NON-RESTRICTED FREQUENCY BAND 38

5. 6 dB BANDWIDTH 63

5.1.TEST SETUP 63
6.2. LIMIT 63
6.3. TEST PROCEDURE 63
6.4. TEST RESULTS 63

6. MAXIMUM OUTPUT POWER MEASUREMENT 72

6.1. TEST SETUP. 72
6.2. LIMIT 72
6.3 TEST PROCEDURE 72
6.4 TEST RESULTS 73

7. POWER SPECTRAL DENSITY MEASUREMENT 76

7.1. TEST SETUP 76
7.2. LIMIT 76
7.3. TEST PROCEDURE (PKPSD) 76
7.4. TEST RESULTS 76

8. ANTENNA REQUIREMENT 85

8.1. STANDARD APPLICABLE 85
8.2. ANTENNA CONNECTED CONSTRUCTION 85

9. RF EXPOSURE EVALUATION 86

9.1. ENVIRONMENTAL EVALUATION AND EXPOSURE LIMIT ACCORDING TO FCC CFR 47 PART 1, 1.1307(B), 1.1310 86
9.2. FRIIS TRANSMISSION FORMULA : PD=(POUT*G)\(4*PI*R2) 86
9.3. TEST RESULT OF RF EXPOSURE EVALUATION 87
9.4. OUTPUT POWER INTO ANTENNA & RF EXPOSURE EVALUATION DISTANCE 87

10. TEST SETUP PHOTO OF EUT 88

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

1. General information

1.1. Details of applicant

Applicant	:	Inkel Corporation
Address	:	93, Cheongjung-ro, Bupyeong-Gu, Incheon, 403-853, Korea
Contact Person	:	Bon-Keun, Koo
Telephone	:	+ 82-32-650-6141
Fax	:	+ 82-32-650-6466

1.2. Manufacturer / Factory Information

Manufacturer	:	Inkel Corporation.
Address	:	93, Cheongjung-ro, Bupyeong-Gu, Incheon, 403-853, Korea
Factory 1	:	Inkel Corporation.
Address	:	93, Cheongjung-ro, Bupyeong-Gu, Incheon, 403-853, Korea
Factory 2	:	Dongguan Inkel Electronics Co., Ltd.
Address	:	Shang qiao Industrial Road No.36, Dongcheng District, Dongguan City, Guangdong Province, 523111, People's Republic of China
Factory 3	:	Inkel Vietnam Co., Ltd.
Address	:	Block 26, Quang minh industrial Zone, Quang Minh Town, Me Linh District, Hanoi City, 100000, Vietnam

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

1.3. Summary of test results

The EUT has been tested according to the following specifications;

Section in FCC part 15	Description	Result
§15.205 §15.209 §15.247(d)	Transmitter radiated spurious emissions, Conducted spurious emission	C
§15.247(a)(2)	6 dB Bandwidth	C
§15.247(b)(e)	Maximum Conducted Output Power	C
§15.247(e)	Transmitter Power Spectral Density	C
§1.1307(b)(1)	RF exposure evaluation	C

The sample was tested according to the following specification:
FCC Parts 15.247; ANSI C-63.4-2009
FCC Public Notice KDB 558074 D01 v03r02
TEST SITE REGISTRATION NUMBER: ***FCC(670686)***

※ Abbreviation

C Complied
N/A Not applicable
F Fail

Approval Signatories

Test and Report Completed by :	Report Approval by :
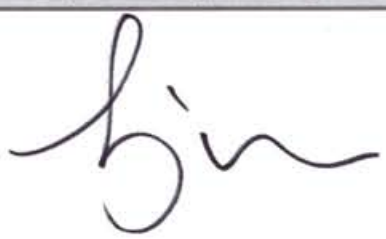	
Jungmoo Her Test Engineer MOVON CORPORATION	Issac Jin Technical Manager MOVON CORPORATION

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

2. EUT Description

Kind of product	HDMI Dongle
FCC ID	VNH-T001M
Model Name	VUDU SPARK
Serial Number	N/A
Power supply	DC 5.0V
Frequency range	2 412 ㎒ ~ 2 462 ㎒ (802.11b/g/n20)
	2 422 ㎒ ~ 2 452 ㎒ (802.11n40)
	2 405 ㎒ ~ 2 480 ㎒ (Zigbee)
Modulation technique	CCK, DQPSK, DBPSK (802.11b)
	64QAM, 16QAM, QPSK, BPSK (802.11g/n20/n40)
	O-QPSK (Zigbee)
Number of channels	11 (802.11b/g/n20)
	9 (802.11n40)
	16 (Zigbee)
Antenna gain	0.64 ㏈i (Max.) (WLAN)
	5.3 ㏈i (Max.) (Zigbee)
Test Site Registration Number	FCC(670686)

2.1. Declarations by the manufacturer
None

2.2. Details of modification
None

2.3. Table for Test Modes (WLAN)
Preliminary tests were performed in different data rate to find the worst radiated emission.
The data rate shown in the table below is the worst-case rate with respect to the specific test item.
Investigation has been done on all the possible configurations for searching the worst cases.
The following table is a list of the test modes shown in this test report.

Mode	Data rate (Worst case)	Channel No. (Freq. MHz)
802.11b	11 Mbps	**01** (2 412) / **06** (2 437) / **11** (2 472)
802.11g	54 Mbps	**01** (2 412) / **06** (2 437) / **11** (2 472)
802.11n_20	MCS7	**01** (2 412) / **06** (2 437) / **11** (2 472)
802.11n_40	MCS7	**03** (2 422) / **06** (2 437) / **09** (2 452)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

3. Measurement equipment

Equipment	Manufacturer	Model	Serial number	Calibration Interval	Calibration due.
EMI Test Receiver	R&S	ESIB26	100196/026	1 year	2014-12-12
Signal Generator	R&S	SMR27	100089	1 year	2014-12-13
Spectrum Analyzer	R&S	FSV-40	100832	1 year	2015-08-13
Power Meter	Agilent	E4416A	GB41290645	1 year	2015-09-29
Power Sensor	Agilent	9327A	US40441490	1 year	2015-07-09
Double Redge Horn Antenna	R&S	HF906	100236	2 year	2015-02-28
Ultra Broadband Antenna	R&S	HL562	100170	1 year	2014-12-13
Power Amplifier	MITEQ	AM-1431	1497315	1 year	2015-09-29
Power Amplifier	MITEQ	AFS43-01002600	1374382	1 year	2015-09-29
High Pass Filter	Wainwright	WHK3.0/18G-10SS	508	1 year	2015-09-29
DC Power Supply	HP	6674A	3637A01351	1 year	2015-09-29
Controller	INNCO	CO2000	co200/064/6961003/L	N/A	N/A
Antenna Master	INNCO	MA4000	MA4000/038/6961003/L	N/A	N/A
Loop Antenna	ETS LINDGREN	6502	00118166	2 year	2015-09-27
Two LINE-V-BETWORK	R&S	ESH3-Z5	100296	1 year	2014-12-12
Two LINE-V-BETWORK	Rolf Heine	NNB-2/16Z	99023	1 year	2014-12-12

※ Remark;
Support equipment

Description	Manufacturer	Model	Serial number
Notebook computer	DELL	Lattitude D510	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4. Transmitter radiated spurious emissions and conducted spurious emissions

4.1. Test setup

4.1.1. Transmitter radiated spurious emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 9kHz to 30MHz Emissions.

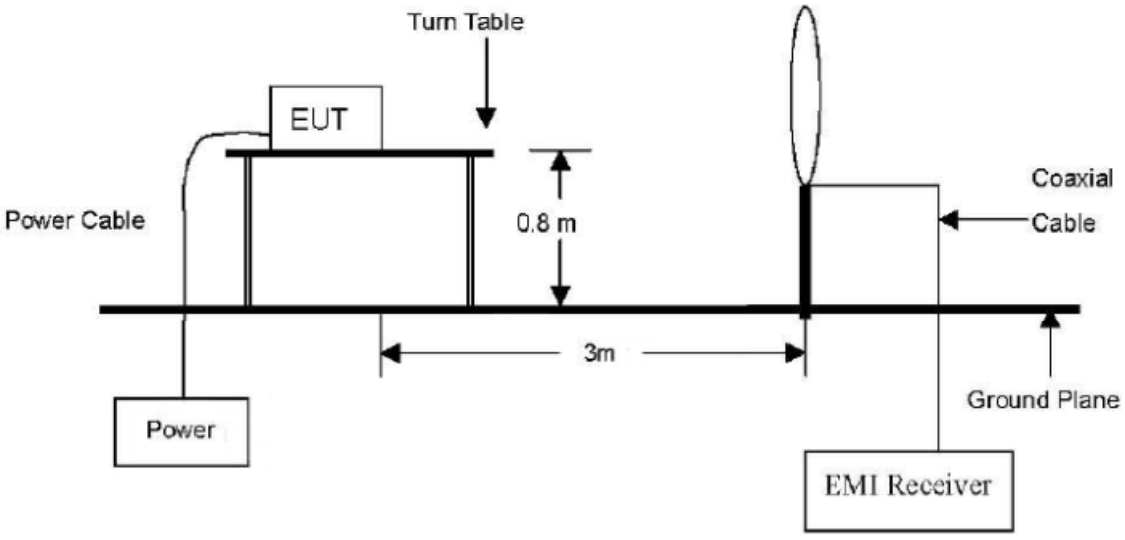

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 ㎒ to 1 ㎓ emissions.

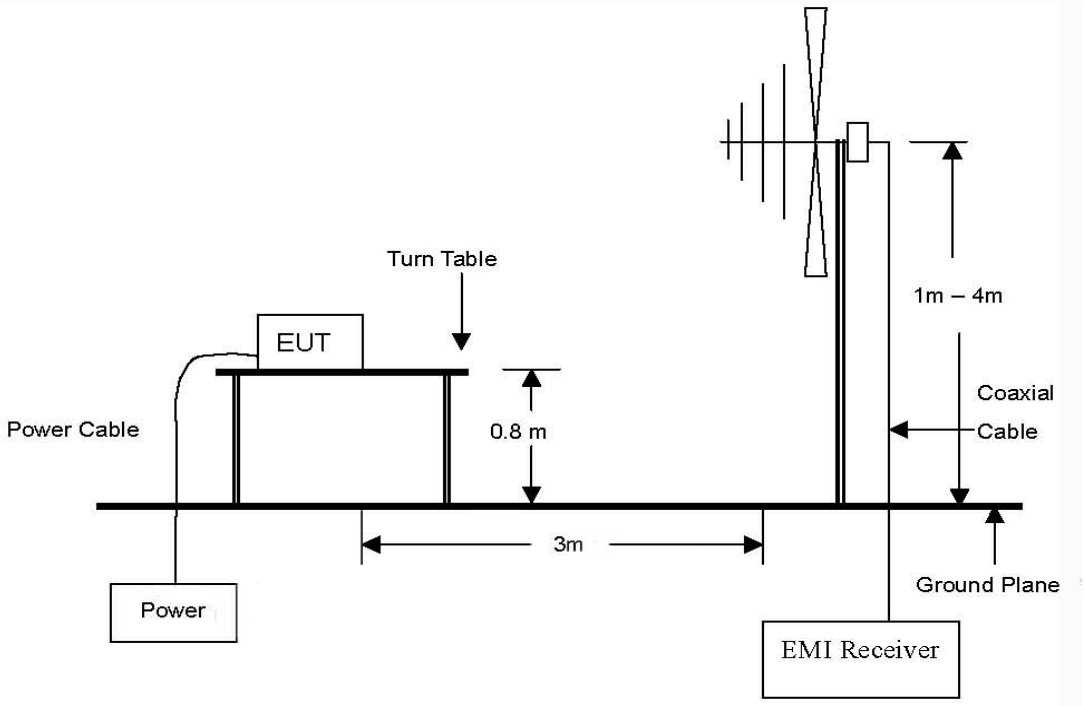

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 ㎓ to 40 ㎓ emissions.

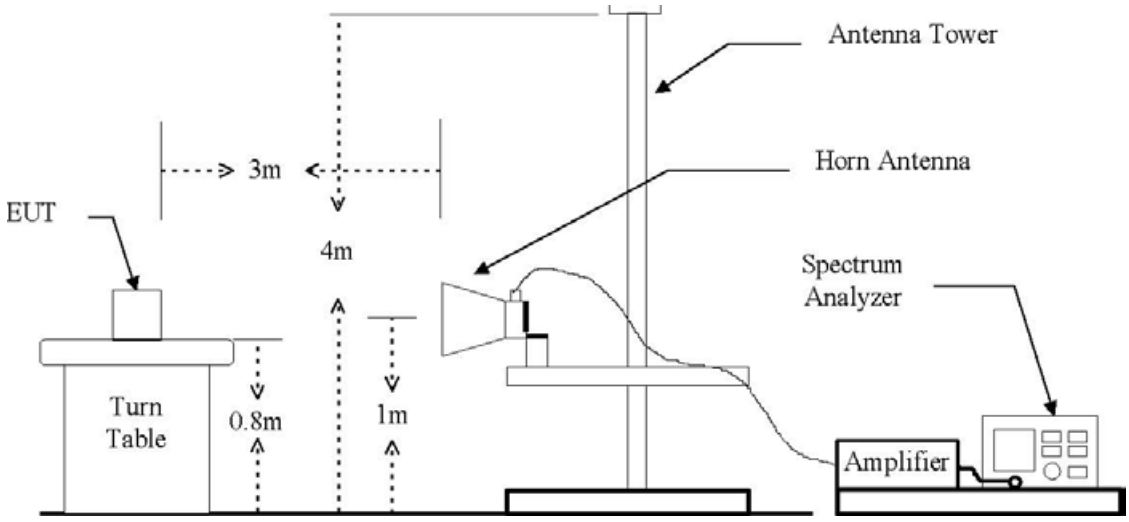

4.2. Limit

According to §15.247(d), in any 100 ㎑ bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 ㏈ below that in the 100 ㎑ bandwidth within the band that contains the highest level of the desired power, based in either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 ㏈ instead of 20 ㏈. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.209(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to §15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (㎒)	Distance (Meters)	Radiated at 3M (㏈㎶/m)	Radiated (㎶/m)
0.009–0.490	300	See the remark	2400/F(㎑)
0.490–1.705	30		24000/F(㎑)
1.705–30.0	30		30
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

According to §15.205(a), Except as provided elsewhere in this Subpart, the emissions from Restricted bands of operation shall not exceed the field strength levels specified in the following table:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.694 75 – 16.695 25	608 – 614	5.35 – 5.46
2.173 5 – 2.190 5	16.804 25 -16.804 75	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.177 25 – 4.177 75	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.207 25 – 4.207 75	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.267 75 – 6.268 25	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.311 75 – 6.312 25	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
9.362 – 8.366	156.524 75 – 156.525 25	2483.5 – 2500	17.7 – 21.4
8.376 25 – 8.386 75	156.7 – 156.9	2655 – 2900	22.01 – 23.12
8.414 25 – 8.414 75	162.012 5 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 - 3339	31.2 – 31.8
12.519 75 – 12.520 25	240 – 285	3345.8 – 3358	36.43 – 36.5
12.576 75 – 12.577 25	322 -335.4	3600 – 4400	
13.36 – 13.41			

*Remark

1. Emission level in dB uV/m = 20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Distance extrapolation factor = 40log(Specific distance/ test distance) (dB)
   Limit line=Specific limits(dB uV) + distance extrapolation factor.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

4.3.1. Test procedures for radiated spurious emissions

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

※ Remark;

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 ㎑ for Peak detection (PK) at frequency below 30 ㎒
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 ㎑ for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 ㎓.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 ㎒ for Peak detection and frequency above 1 ㎓.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 ㎒z and the video bandwidth is 10 ㎐ for Average detection (AV) at frequency above 1 ㎓.

4.3.2. Test procedures for conducted spurious emissions

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074, section 5.4.1.1, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 ㎑. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 4.4.4. The limit for out of band spurious emission at the band edge is 30 ㏈ below the fundamental emission level measured in a 100 ㎑ bandwidth.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4.4. Test result

Ambient temperature: 23 ℃
Relative humidity: 40 % R.H.

4.4.1. Spurious radiated emission

The frequency spectrum from 9㎑ to 30 ㎒ was investigated. Emission levels are not reported much lower than the limits by over 20 ㏈. All reading values are peak values.
To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: 802.11b mode
A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (㏈㎶)	Detector mode	Pol.	Ant. factor (㏈/m)	CL (㏈)	Actual (㏈㎶/m)	Limit (㏈㎶/m)	Margin (㏈)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (㏈㎶)	Detector mode	Pol.	Ant. factor (㏈/m)	CL (㏈)	Actual (㏈㎶/m)	Limit (㏈㎶/m)	Margin (㏈)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (㏈㎶)	Detector mode	Pol.	Ant. factor (㏈/m)	CL (㏈)	Actual (㏈㎶/m)	Limit (㏈㎶/m)	Margin (㏈)
No other emissions were detected at a level greater than 20dB below limit.								

※ Remark
1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. 15.31 Measurement standards.
The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11g mode

A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_20MHz mode

A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_40MHz mode

A. Low channel (2 422 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel (2 452 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: Zigbee mode

A. Low channel (2 405 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel (2 440 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel (2 480 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4.4.2. Spurious radiated emission

The frequency spectrum from 30 ㎒ to 1 000 ㎒ was investigated. Emission levels are not reported much lower than the limits by over 20 ㏈. All reading values are peak values.
To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: 802.11b mode
A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (㏈㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (㏈㎶/m)	Limit (㏈㎶/m)	Margin (㏈)
35.83	23.90	Peak	H	-9.4	33.30	46.00	12.70
134.97	27.80	Peak	H	-9.5	37.30	46.00	8.70
144.69	28.90	Peak	V	-1.7	30.60	46.00	15.40
162.18	29.00	Peak	V	-1.6	30.60	46.00	15.40
255.49	24.90	Peak	H	-1.3	26.20	46.00	19.80
453.77	40.40	Peak	H	3.7	36.70	46.00	9.30
Above 500	Not detected	-	-	-	-	-	-

※ Remark
1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.
The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	21.81	Peak	H	-9.4	31.21	46.00	14.79
134.97	26.05	Peak	H	-9.5	35.55	46.00	10.45
144.69	29.34	Peak	V	-1.7	31.04	46.00	14.96
162.18	28.24	Peak	V	-1.6	29.84	46.00	16.16
255.49	27.61	Peak	H	-1.3	28.91	46.00	17.09
453.77	37.93	Peak	H	3.7	34.23	46.00	11.77
Above 500	Not detected	-	-	-	-	-	-

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	23.65	Peak	H	-9.4	33.05	46.00	12.95
134.97	26.71	Peak	H	-9.5	36.21	46.00	9.79
144.69	28.78	Peak	V	-1.7	30.48	46.00	15.52
162.18	27.98	Peak	V	-1.6	29.58	46.00	16.42
255.49	24.82	Peak	H	-1.3	26.12	46.00	19.88
453.77	39.71	Peak	H	3.7	36.01	46.00	9.99
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11g mode

A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	21.20	Peak	H	-9.4	30.60	46.00	15.40
134.97	25.92	Peak	H	-9.5	35.42	46.00	10.58
144.69	29.40	Peak	V	-1.7	31.10	46.00	14.90
162.18	29.91	Peak	V	-1.6	31.51	46.00	14.49
255.49	24.47	Peak	H	-1.3	25.77	46.00	20.23
453.77	37.14	Peak	H	3.7	33.44	46.00	12.56
Above 500	Not detected	-	-	-	-	-	-

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	21.19	Peak	H	-9.4	30.59	46.00	15.41
134.97	25.34	Peak	H	-9.5	34.84	46.00	11.16
144.69	28.57	Peak	V	-1.7	30.27	46.00	15.73
162.18	29.30	Peak	V	-1.6	30.90	46.00	15.10
255.49	25.58	Peak	H	-1.3	26.88	46.00	19.12
453.77	38.11	Peak	H	3.7	34.41	46.00	11.59
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	21.15	Peak	H	-9.4	30.55	46.00	15.45
134.97	24.98	Peak	H	-9.5	34.48	46.00	11.52
144.69	28.54	Peak	V	-1.7	30.24	46.00	15.76
162.18	29.45	Peak	V	-1.6	31.05	46.00	14.95
255.49	24.99	Peak	H	-1.3	26.29	46.00	19.71
453.77	35.90	Peak	H	3.7	32.20	46.00	13.80
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_20 mode

A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	24.01	Peak	H	-9.4	33.41	46.00	12.59
134.97	26.10	Peak	H	-9.5	35.60	46.00	10.40
144.69	30.61	Peak	V	-1.7	32.31	46.00	13.69
162.18	30.24	Peak	V	-1.6	31.84	46.00	14.16
255.49	27.62	Peak	H	-1.3	28.92	46.00	17.08
453.77	39.15	Peak	H	3.7	35.45	46.00	10.55
Above 500	Not detected	-	-	-	-	-	-

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	23.40	Peak	H	-9.4	32.80	46.00	13.20
134.97	25.38	Peak	H	-9.5	34.88	46.00	11.12
144.69	31.32	Peak	V	-1.7	33.02	46.00	12.98
162.18	30.64	Peak	V	-1.6	32.24	46.00	13.76
255.49	28.18	Peak	H	-1.3	29.48	46.00	16.52
453.77	39.71	Peak	H	3.7	36.01	46.00	9.99
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	23.90	Peak	H	-9.4	33.30	46.00	12.70
134.97	25.77	Peak	H	-9.5	35.27	46.00	10.73
144.69	30.21	Peak	V	-1.7	31.91	46.00	14.09
162.18	30.05	Peak	V	-1.6	31.65	46.00	14.35
255.49	28.24	Peak	H	-1.3	29.54	46.00	16.46
453.77	38.18	Peak	H	3.7	34.48	46.00	11.52
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_40 mode

A. Low channel (2 422 ㎒)

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.		Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	23.48	Peak	H	-9.4	32.88	46.00	13.12
134.97	25.90	Peak	H	-9.5	35.40	46.00	10.60
144.69	31.35	Peak	V	-1.7	33.05	46.00	12.95
162.18	28.64	Peak	V	-1.6	30.24	46.00	15.76
255.49	28.87	Peak	H	-1.3	30.17	46.00	15.83
453.77	39.72	Peak	H	3.7	36.02	46.00	9.98
Above 500	Not detected	-	-	-	-	-	-

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.		Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	24.05	Peak	H	-9.4	33.45	46.00	12.55
134.97	25.72	Peak	H	-9.5	35.22	46.00	10.78
144.69	31.20	Peak	V	-1.7	32.90	46.00	13.10
162.18	28.95	Peak	V	-1.6	30.55	46.00	15.45
255.49	29.02	Peak	H	-1.3	30.32	46.00	15.68
453.77	39.68	Peak	H	3.7	35.98	46.00	10.02
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 452 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	23.67	Peak	H	-9.4	33.07	46.00	12.93
134.97	25.60	Peak	H	-9.5	35.10	46.00	10.90
144.69	31.44	Peak	V	-1.7	33.14	46.00	12.86
162.18	29.29	Peak	V	-1.6	30.89	46.00	15.11
255.49	29.56	Peak	H	-1.3	30.86	46.00	15.14
453.77	39.62	Peak	H	3.7	35.92	46.00	10.08
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: Zigbee mode

A. Low channel (2 405 ㎒)

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.		Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	22.64	Peak	H	-9.4	32.04	46.00	13.96
134.97	25.34	Peak	H	-9.5	34.84	46.00	11.16
144.69	30.86	Peak	V	-1.7	32.56	46.00	13.44
162.18	30.42	Peak	V	-1.6	32.02	46.00	13.98
255.49	28.19	Peak	H	-1.3	29.49	46.00	16.51
453.77	38.14	Peak	H	3.7	34.44	46.00	11.56
Above 500	Not detected	-	-	-	-	-	-

B. Middle channel (2 440 ㎒)

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.		Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	22.91	Peak	H	-9.4	32.31	46.00	13.69
134.97	25.06	Peak	H	-9.5	34.56	46.00	11.44
144.69	31.21	Peak	V	-1.7	32.91	46.00	13.09
162.18	31.25	Peak	V	-1.6	32.85	46.00	13.15
255.49	28.49	Peak	H	-1.3	29.79	46.00	16.21
453.77	35.21	Peak	H	3.7	31.51	46.00	14.49
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 480 ㎒)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	(Ant. Factor + C.L)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
35.83	23.26	Peak	H	-9.4	32.66	46.00	13.34
134.97	25.98	Peak	H	-9.5	35.48	46.00	10.52
144.69	31.54	Peak	V	-1.7	33.24	46.00	12.76
162.18	31.46	Peak	V	-1.6	33.06	46.00	12.94
255.49	28.82	Peak	H	-1.3	30.12	46.00	15.88
453.77	34.70	Peak	H	3.7	31.00	46.00	15.00
Above 500	Not detected	-	-	-	-	-	-

※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4.4.3. Spurious radiated emission

The frequency spectrum above 1 000 ㎒ was investigated. Emission levels are not reported much lower than the limits by over 20 ㏈.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: 802.11b mode

A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (㏈㎶)	Detector mode	Pol.	Ant. factor (㏈/m)	Amp + CL (㏈)	Actual (㏈㎶/m)	Limit (㏈㎶/m)	Margin (㏈)
4 823.99	76.33	Peak	H	33.26	44.10	65.49	74.00	8.51
4 823.99	60.12	Avg	H	33.26	44.10	49.28	54.00	4.72
7 235.97	71.10	Peak	H	35.66	43.05	63.71	74.00	10.29
7 235.97	54.58	Avg	H	35.66	43.05	47.19	54.00	6.81
Above 8 000	Not detected	-	-	-	-	-	-	-

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (㏈㎶)	Detector mode	Pol.	Ant. factor (㏈/m)	Amp + CL (㏈)	Actual (㏈㎶/m)	Limit (㏈㎶/m)	Margin (㏈)
4874.05	77.44	Peak	H	33.26	44.10	66.60	74.00	7.40
4874.05	60.62	Avg	H	33.26	44.10	49.78	54.00	4.22
7312.19	72.14	Peak	H	35.66	43.05	64.75	74.00	9.25
7312.19	55.02	Avg	H	35.66	43.05	47.63	54.00	6.37
Above 8 000	Not detected	-	-	-	-	-	-	-

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (㏈㎶)	Detector mode	Pol.	Ant. factor (㏈/m)	Amp + CL (㏈)	Actual (㏈㎶/m)	Limit (㏈㎶/m)	Margin (㏈)
4924.14	75.77	Peak	H	33.26	44.10	64.93	74.00	9.07
4924.14	59.54	Avg	H	33.26	44.10	48.70	54.00	5.30
7387.38	73.61	Peak	H	35.66	43.05	66.22	74.00	7.78
7387.38	56.99	Avg	H	35.66	43.05	49.60	54.00	4.40
Above 8 000	Not detected	-	-	-	-	-	-	-

※ Remark

1. Measuring frequencies from 1 ㎓ to the 40 ㎓.
2. Radiated emissions measured in frequency above 1 000 ㎒ were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11g mode

A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4823.48	77.53	Peak	H	33.26	44.10	66.69	74.00	7.31
4823.48	52.81	Avg	H	33.26	44.10	41.97	54.00	12.03
7235.59	74.69	Peak	H	35.66	43.05	67.30	74.00	6.70
7235.59	41.22	Avg	H	35.66	43.05	33.83	54.00	20.17
Above 8 000	Not detected	-	-	-	-	-	-	-

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4882.38	78.09	Peak	H	33.26	44.10	67.25	74.00	6.75
4882.38	53.36	Avg	H	33.26	44.10	42.52	54.00	11.48
7311.12	73.83	Peak	H	35.66	43.05	66.44	74.00	7.56
7311.12	43.11	Avg	H	35.66	43.05	35.72	54.00	18.28
Above 8 000	Not detected	-	-	-	-	-	-	-

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4918.22	76.42	Peak	H	33.26	44.10	65.58	74.00	8.42
4918.22	52.83	Avg	H	33.26	44.10	41.99	54.00	12.01
7383.29	74.10	Peak	H	35.66	43.05	66.71	74.00	7.29
7383.29	44.84	Avg	H	35.66	43.05	37.45	54.00	16.55
Above 8 000	Not detected	-	-	-	-	-	-	-

※ Remark

1. Measuring frequencies from 1 ㎓ to the 40 ㎓.
2. Radiated emissions measured in frequency above 1 000 ㎒ were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_20 mode

A. Low channel (2 412 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4828.51	74.42	Peak	H	33.26	44.10	63.58	74.00	10.42
4828.51	51.91	Avg	H	33.26	44.10	41.07	54.00	12.93
7236.06	72.23	Peak	H	35.66	43.05	64.84	74.00	9.16
7236.06	43.12	Avg	H	35.66	43.05	35.73	54.00	18.27
Above 8 000	Not detected	-	-	-	-	-	-	-

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4874.94	76.00	Peak	H	33.26	44.10	65.16	74.00	8.84
4874.94	51.94	Avg	H	33.26	44.10	41.10	54.00	12.90
7304.16	75.34	Peak	H	35.66	43.05	67.95	74.00	6.05
7304.16	43.50	Avg	H	35.66	43.05	36.11	54.00	17.89
Above 8 000	Not detected	-	-	-	-	-	-	-

C. High channel (2 462 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4923.62	74.16	Peak	H	33.26	44.10	63.32	74.00	10.68
4923.62	51.79	Avg	H	33.26	44.10	40.95	54.00	13.05
7386.04	74.93	Peak	H	35.66	43.05	67.54	74.00	6.46
7386.04	42.98	Avg	H	35.66	43.05	35.59	54.00	18.41
Above 8 000	Not detected	-	-	-	-	-	-	-

※ Remark

1. Measuring frequencies from 1 ㎓ to the 40 ㎓.
2. Radiated emissions measured in frequency above 1 000 ㎒ were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_40 mode

A. Low channel (2 422 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4838.03	76.90	Peak	H	33.26	44.10	66.06	74.00	7.94
4838.03	56.20	Avg	H	33.26	44.10	45.36	54.00	8.64
7256.56	72.64	Peak	H	35.66	43.05	65.25	74.00	8.75
7256.56	54.35	Avg	H	35.66	43.05	46.96	54.00	7.04
Above 8 000	Not detected	-	-	-	-	-	-	-

B. Middle channel (2 437 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4873.91	77.67	Peak	H	33.26	44.10	66.83	74.00	7.17
4873.91	54.21	Avg	H	33.26	44.10	43.37	54.00	10.63
7311.51	71.79	Peak	H	35.66	43.05	64.40	74.00	9.60
7311.51	53.81	Avg	H	35.66	43.05	46.42	54.00	7.58
Above 8 000	Not detected	-	-	-	-	-	-	-

C. High channel (2 452 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4905.47	75.88	Peak	H	33.26	44.10	65.04	74.00	8.96
4905.47	55.08	Avg	H	33.26	44.10	44.24	54.00	9.76
7368.03	72.77	Peak	H	35.66	43.05	65.38	74.00	8.62
7368.03	54.34	Avg	H	35.66	43.05	46.95	54.00	7.05
Above 8 000	Not detected	-	-	-	-	-	-	-

※ Remark

1. Measuring frequencies from 1 ㎓ to the 40 ㎓.
2. Radiated emissions measured in frequency above 1 000 ㎒ were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: Zigbee mode

A. Low channel (2 405 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4810.84	55.50	Peak	H	33.26	44.10	44.66	74.00	29.34
4810.84	45.90	Avg	H	33.26	44.10	35.06	54.00	18.94
Above 5 000	Not detected	-	-	-	-	-	-	-

B. Middle channel (2 440 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4879.07	54.35	Peak	H	33.26	44.10	43.51	74.00	30.49
4879.07	44.29	Avg	H	33.26	44.10	33.45	54.00	20.55
Above 5 000	Not detected	-	-	-	-	-	-	-

C. High channel (2 480 ㎒)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
4959.23	52.23	Peak	H	33.26	44.10	41.39	74.00	32.61
4959.23	41.74	Avg	H	33.26	44.10	30.90	54.00	23.10
Above 5 000	Not detected	-	-	-	-	-	-	-

※ Remark

1. Measuring frequencies from 1 ㎓ to the 40 ㎓.
2. Radiated emissions measured in frequency above 1 000 ㎒ were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4.4.4. Band Edge

Operation mode: 802.11b mode

A. 2 310 - 2 390 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2389.83	60.01	Peak	H	28.86	43.65	45.22	74.00	28.78
2389.83	44.15	Average	H	28.86	43.65	29.36	54.00	24.64
2389.83	58.66	Peak	V	28.86	43.65	43.87	74.00	30.13
2389.83	43.13	Average	V	28.86	43.65	28.34	54.00	25.66

B. 2 483.5 – 2 500 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2483.89	57.97	Peak	H	28.86	43.65	43.18	74.00	30.82
2483.89	43.58	Average	H	28.86	43.65	28.79	54.00	25.21
2483.89	55.22	Peak	V	28.86	43.65	40.43	74.00	33.57
2483.89	41.06	Average	V	28.86	43.65	26.27	54.00	27.73

Operation mode: 802.11g mode

A. 2 310 - 2 390 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2389.02	69.40	Peak	H	28.86	43.65	54.61	74.00	19.39
2389.02	44.27	Average	H	28.86	43.65	29.48	54.00	24.52
2389.02	65.22	Peak	V	28.86	43.65	50.43	74.00	23.57
2389.02	40.70	Average	V	28.86	43.65	25.91	54.00	28.09

B. 2 483.5 – 2 500 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2484.70	74.86	Peak	H	28.86	43.65	60.07	74.00	13.93
2484.70	44.97	Average	H	28.86	43.65	30.18	54.00	23.82
2484.70	70.25	Peak	V	28.86	43.65	55.46	74.00	18.54
2484.70	41.72	Average	V	28.86	43.65	26.93	54.00	27.07

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_20 mode

A. 2 310 - 2 390 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2389.19	69.98	Peak	H	28.86	43.65	55.19	74.00	18.81
2389.19	41.42	Average	H	28.86	43.65	26.63	54.00	27.37
2389.19	65.61	Peak	V	28.86	43.65	50.82	74.00	23.18
2389.19	38.94	Average	V	28.86	43.65	24.15	54.00	29.85

B. 2 483.5 – 2 500 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2483.51	74.93	Peak	H	28.86	43.65	60.14	74.00	13.86
2483.51	44.33	Average	H	28.86	43.65	29.54	54.00	24.46
2483.51	72.11	Peak	V	28.86	43.65	57.32	74.00	16.68
2483.51	42.52	Average	V	28.86	43.65	27.73	54.00	26.27

Operation mode: 802.11n_40 mode

A. 2 310 - 2 390 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2386.74	78.14	Peak	H	28.86	43.65	63.35	74.00	10.65
2386.74	61.51	Average	H	28.86	43.65	46.72	54.00	7.28
2386.74	75.55	Peak	V	28.86	43.65	60.76	74.00	13.24
2386.74	58.49	Average	V	28.86	43.65	43.7	54.00	10.30

B. 2 483.5 – 2 500 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2483.75	78.91	Peak	H	28.86	43.65	64.12	74.00	9.88
2483.75	61.68	Average	H	28.86	43.65	46.89	54.00	7.11
2483.75	74.06	Peak	V	28.86	43.65	59.27	74.00	14.73
2483.75	59.58	Average	V	28.86	43.65	44.79	54.00	9.21

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: Zigbee mode

A. 2 310 - 2 390 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2385.90	48.01	Peak	H	28.86	43.65	33.22	74.00	40.78
2385.90	34.08	Average	H	28.86	43.65	19.29	54.00	34.71
2385.90	46.48	Peak	V	28.86	43.65	31.69	74.00	42.31
2385.90	33.27	Average	V	28.86	43.65	18.48	54.00	35.52

B. 2 483.5 – 2 500 ㎒ measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (㎒)	Reading (dB㎶)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2483.51	65.92	Peak	H	28.86	43.65	51.13	74.00	22.87
2483.51	55.51	Average	H	28.86	43.65	40.72	54.00	13.28
2483.51	64.68	Peak	V	28.86	43.65	49.89	74.00	24.11
2483.51	54.02	Average	V	28.86	43.65	39.23	54.00	14.77

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4.4.5 Conducted power line test

4.4.5.1 Test setup

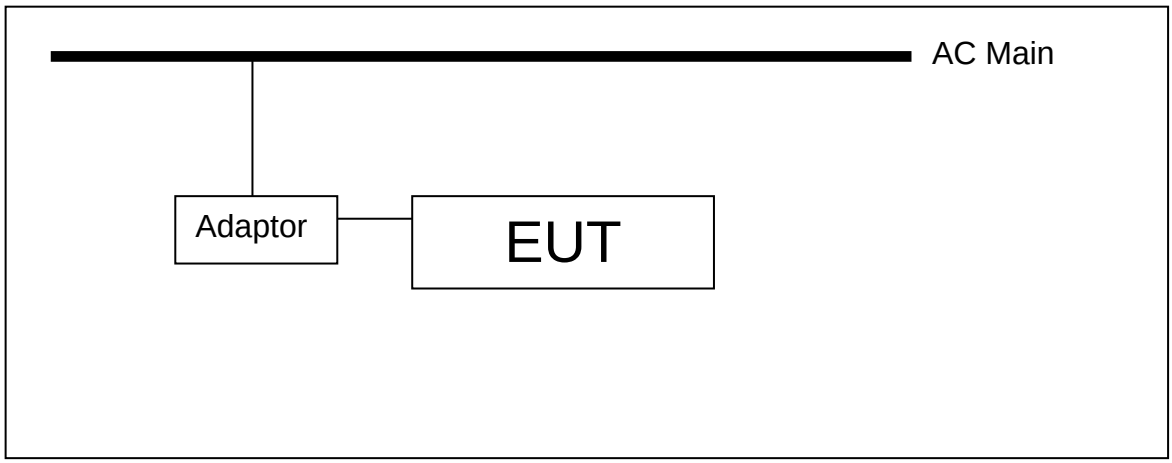

4.4.5.2 Limit

According to §15.107(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 ㎑ to 30 ㎒, shall not exceed the limits in the following table, as measured using a 50 uH/ 50 ohm line impedance stabilization network (LISN).
Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (㎒)	Conducted limit (dB㎶/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

※ Remark

Decreases with the logarithm of the frequency.

4.4.5.3 Test procedures

The test procedure is performed in a 6.5 m × 3.6 m × 3.6 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W) × 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4.4.5.4 Test results

Ambient temperature: 24 ℃
Relative humidity: 49 % R.H.

Frequency range: 0.15 ㎒ ~ 30 ㎒
Measured bandwidth: 9 ㎑

Freq. (㎒)	Line	Q-Peak		
		Level(dB㎶/m)	Limit(dB㎶/m)	Margin(dB)
0.189	H	54.3	64.1	9.8
0.190	H	54.3	64.0	9.7
0.190	N	54.6	64.0	9.4
0.192	N	54.8	63.9	9.1
0.193	N	54.5	63.9	9.4
0.196	N	54.1	63.8	9.7

Freq. (㎒)	Line	Average		
		Level(dB㎶/m)	Limit(dB㎶/m)	Margin(dB)
0.194	N	40.6	53.9	13.3
0.196	H	41.1	53.8	12.7
6.760	N	36.1	50.0	13.9
6.951	N	35.3	50.0	14.7
23.602	H	36.2	50.0	13.8
24.031	N	35.7	50.0	14.3

※ Remark
Line(H): Hot
Line(N): Neutral

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Plot of conducted power line

Test mode: Hot

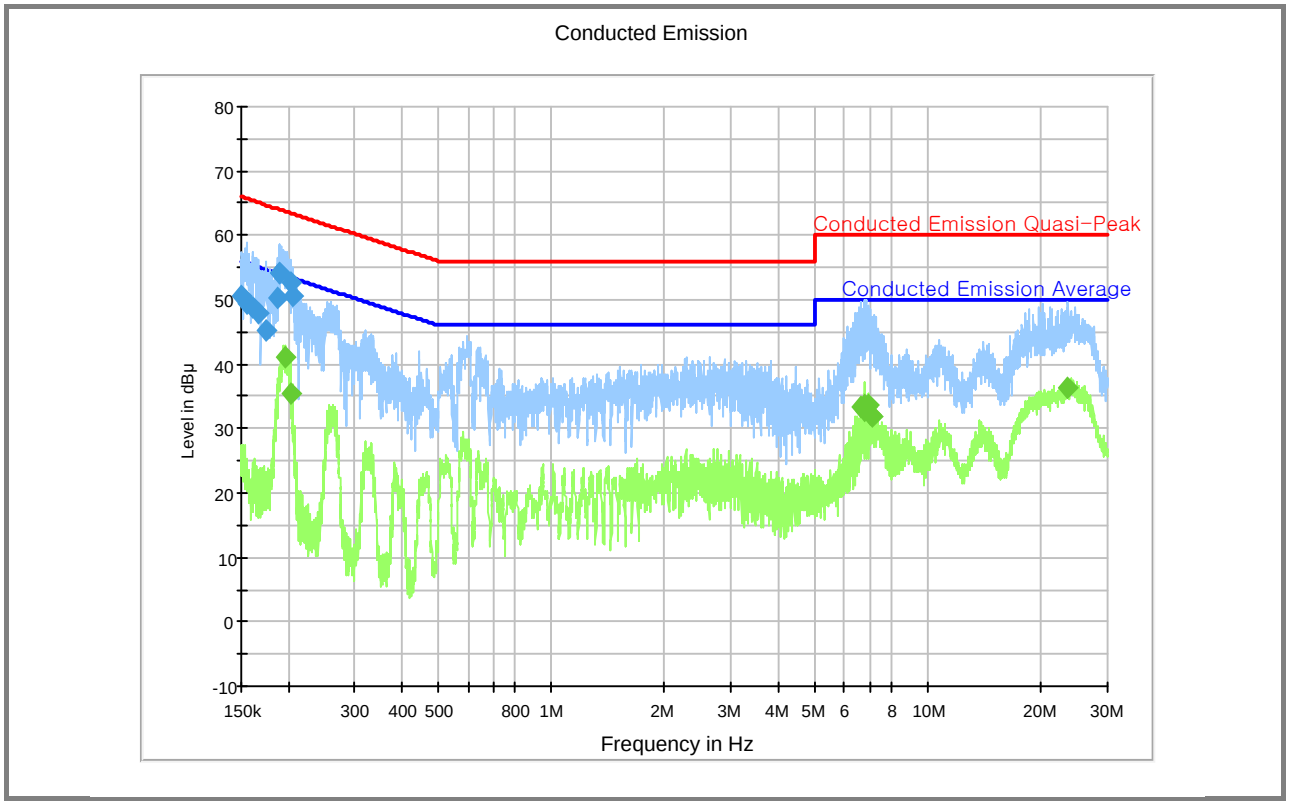

Test mode: Neutral

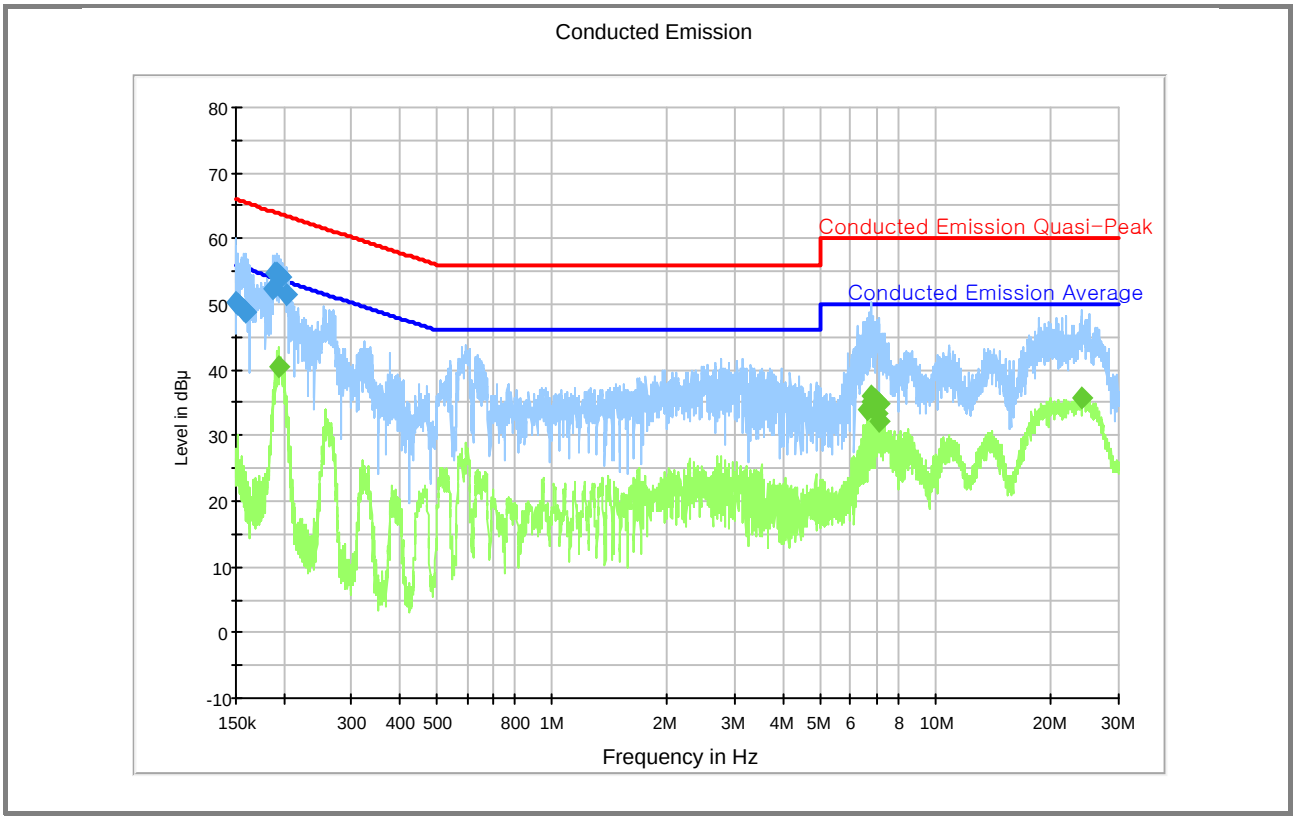

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

4.4.6. Out of Band Emissions in non-restricted frequency band

4.4.6.1. Test requirements and limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc). If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

4.4.6.2. Test procedure

The transmitter output is connected to a spectrum analyzer.

▪Measurement Procedure 1 – Reference level measurement

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4.Set the VBW ≥ 3 x RBW.
5.Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level

▪Measurement Procedure 2– Emissions level measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz(See below note for actual setting)
3. Set the VBW ≥3 x RBW (See below note for actual setting)
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7.Allow the trace to stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

(Note:This test item was tested with below settings.)

- RBW= 100kHz, VBW= 300kHz for frequency range: 9 kHz ~ 30 MHz
- RBW= 1MHz, VBW= 3MHz for frequency range: 30 MHz ~ 10 GHz and 10 GHz~25 GHz

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

4.4.6.3. Test results : **Comply** (refer to Next page – test plots)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11b mode
A. Low channel (2 412 ㎒)

Reference level measurement

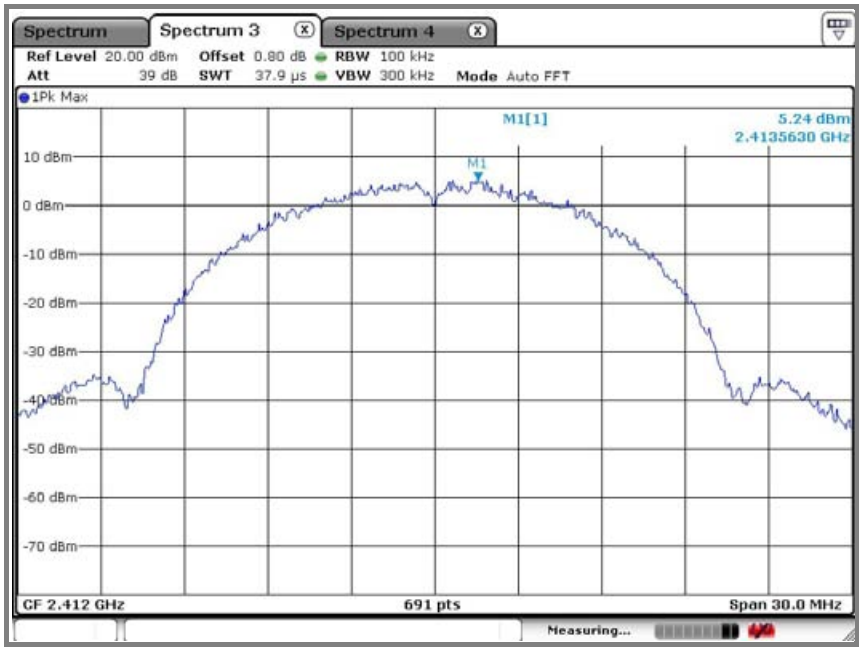

Emission level measurement 1

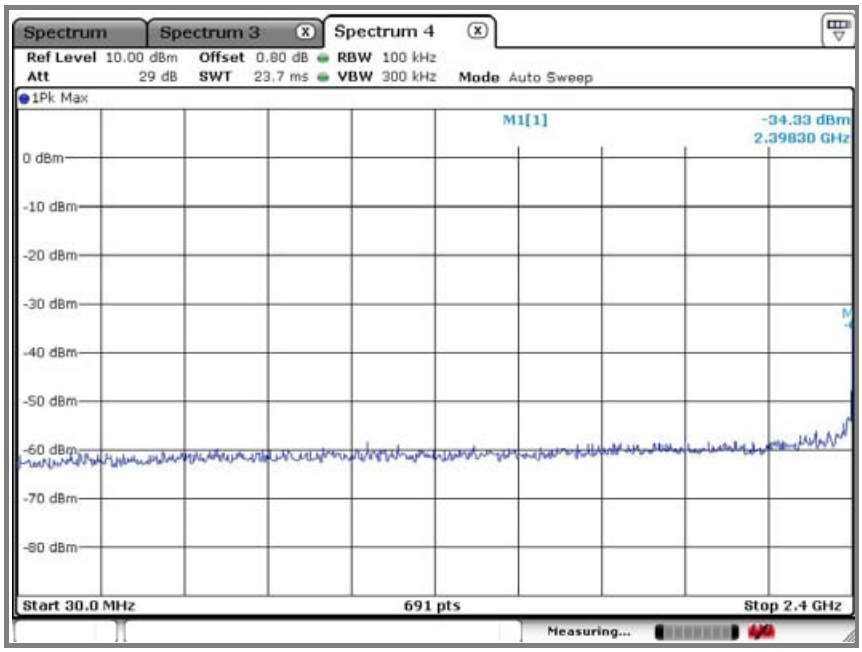

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

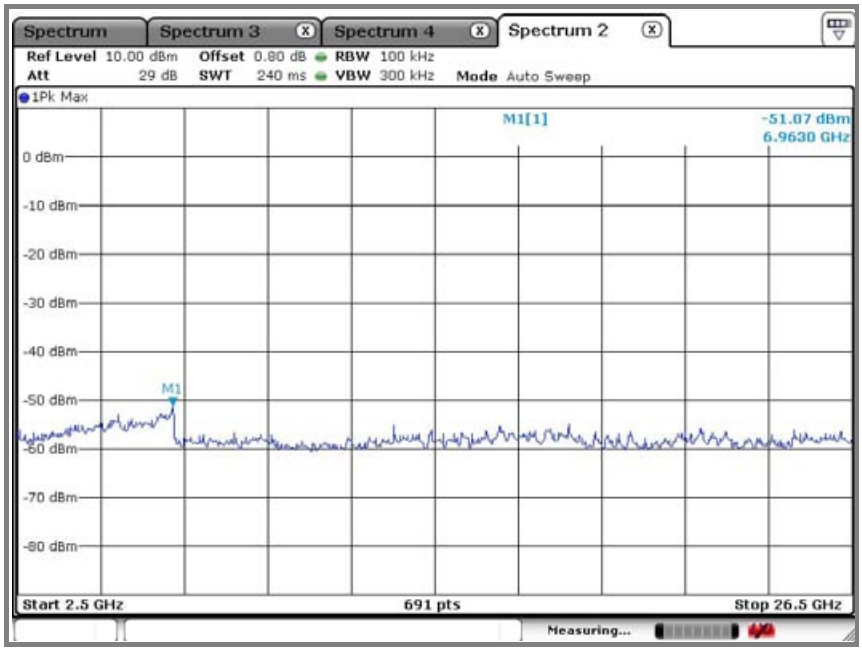

B. Middle channel (2 437 ㎒)

Reference level measurement

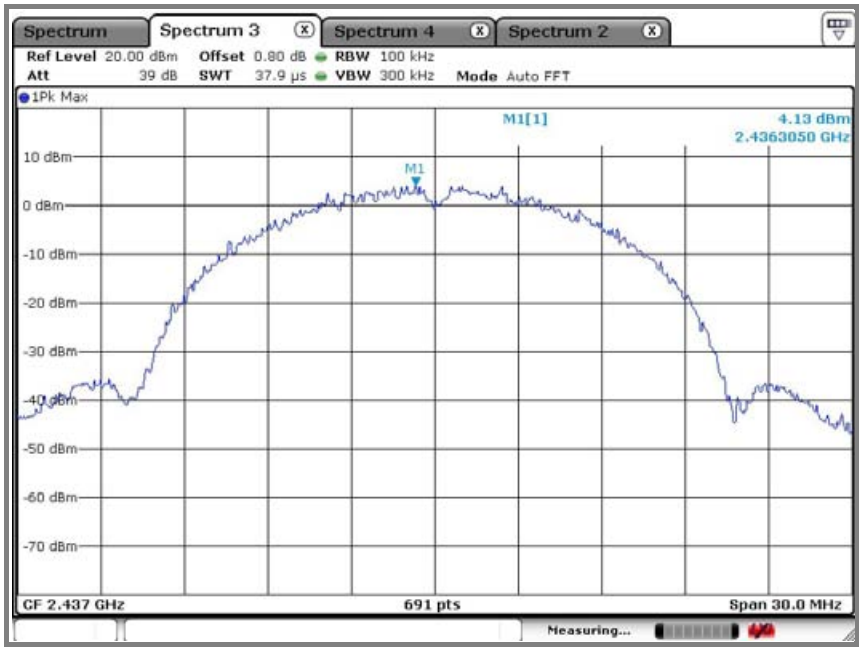

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 1

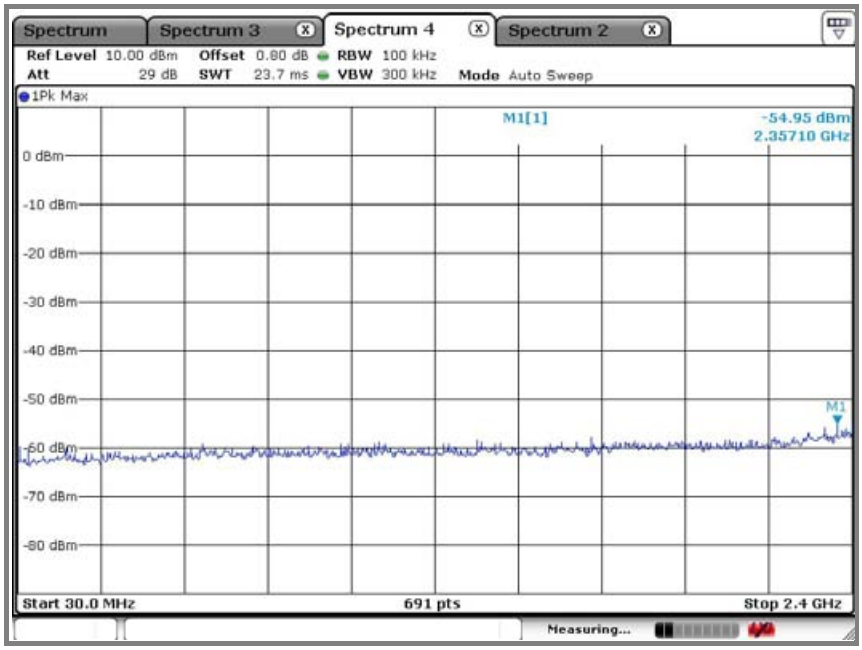

Emission level measurement 2

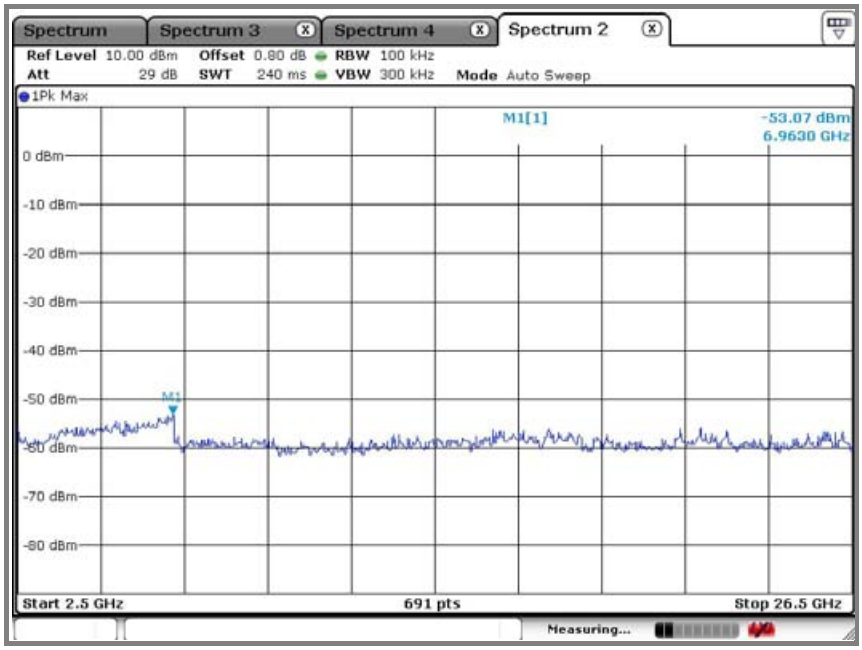

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 462 ㎒)

Reference level measurement

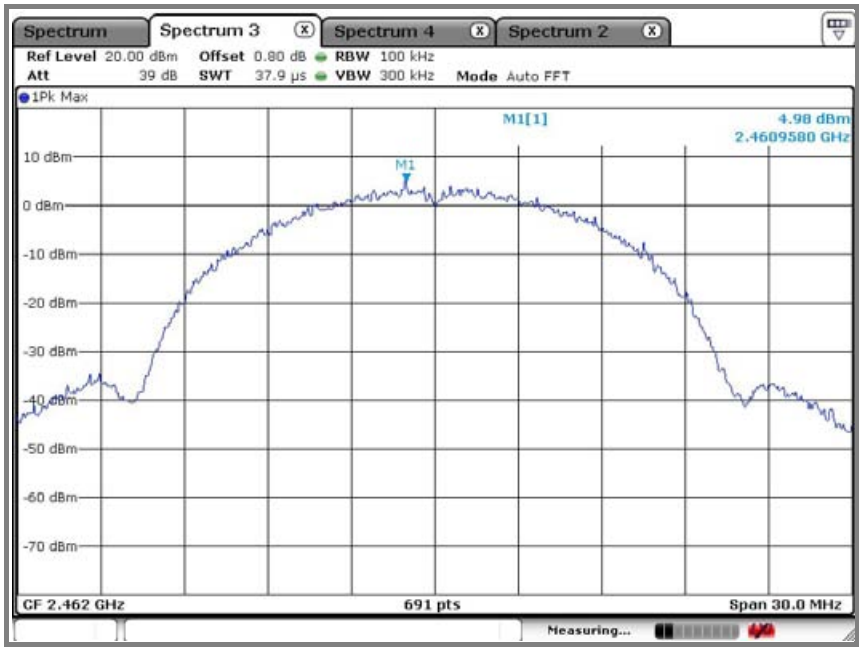

Emission level measurement 1

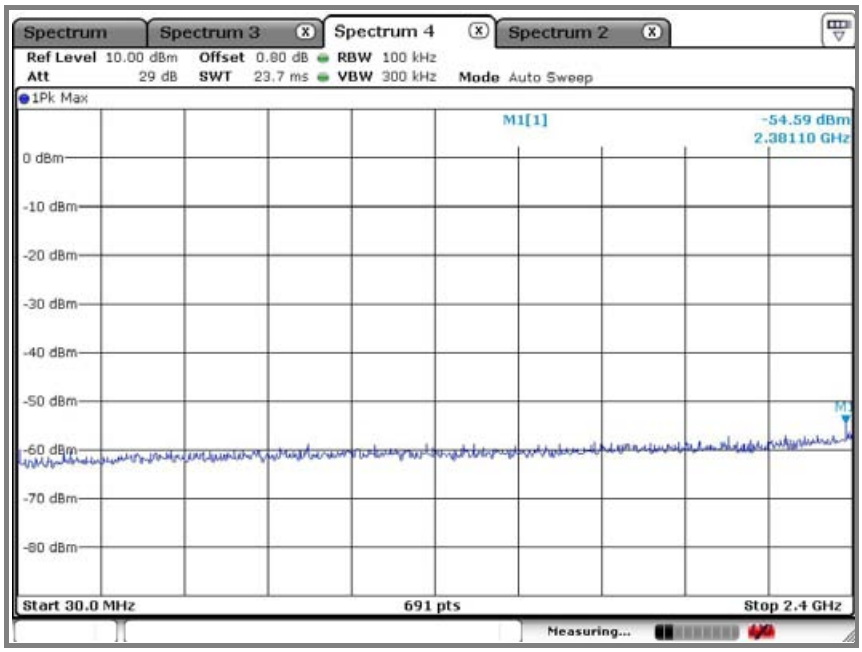

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

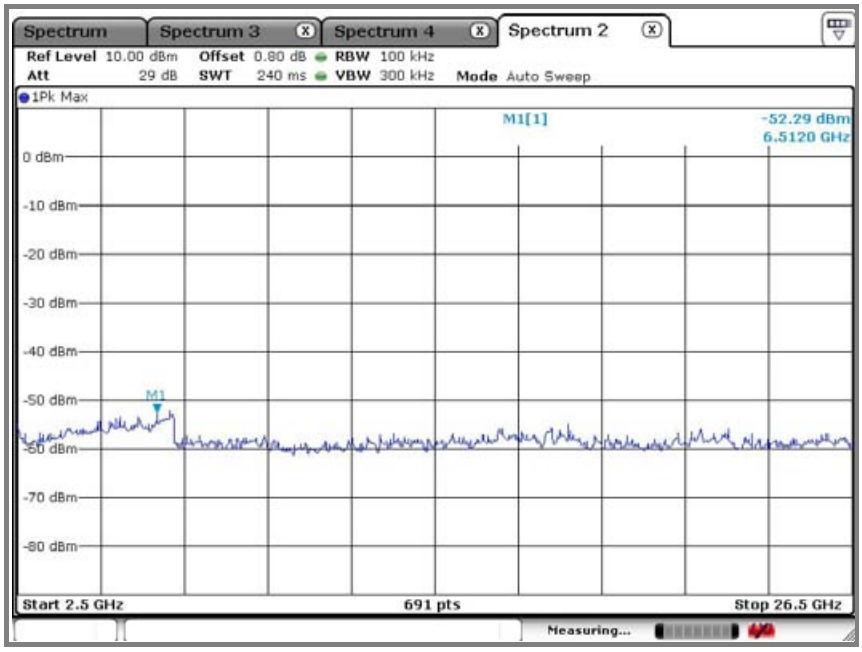

Operation mode: 802.11g mode
A. Low channel (2 412 ㎒)

Reference level measurement

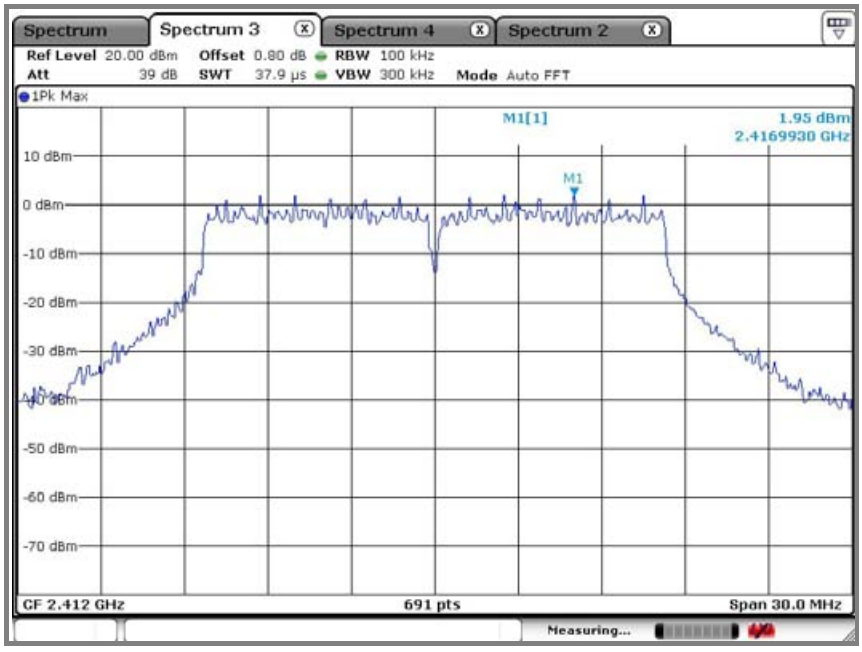

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 1

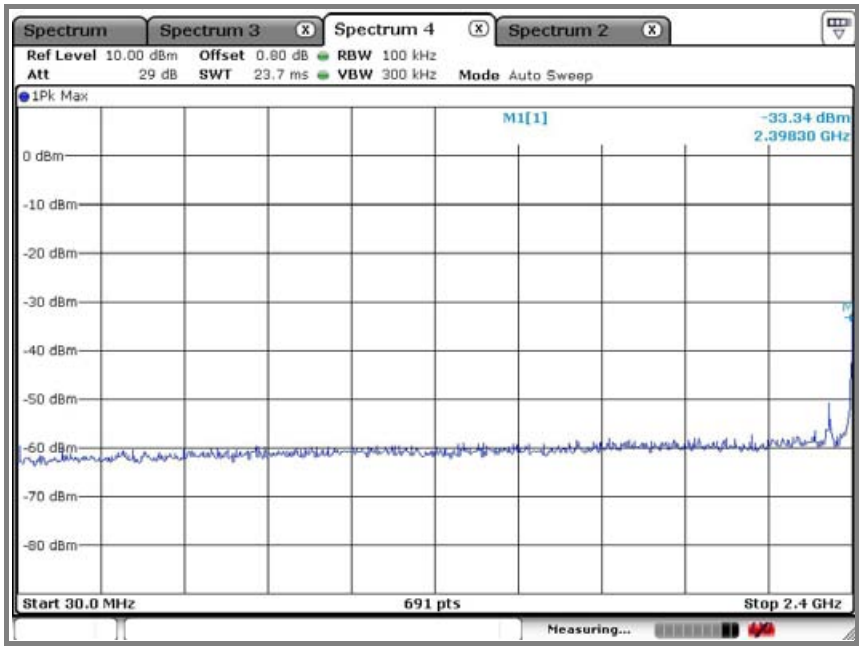

Emission level measurement 2

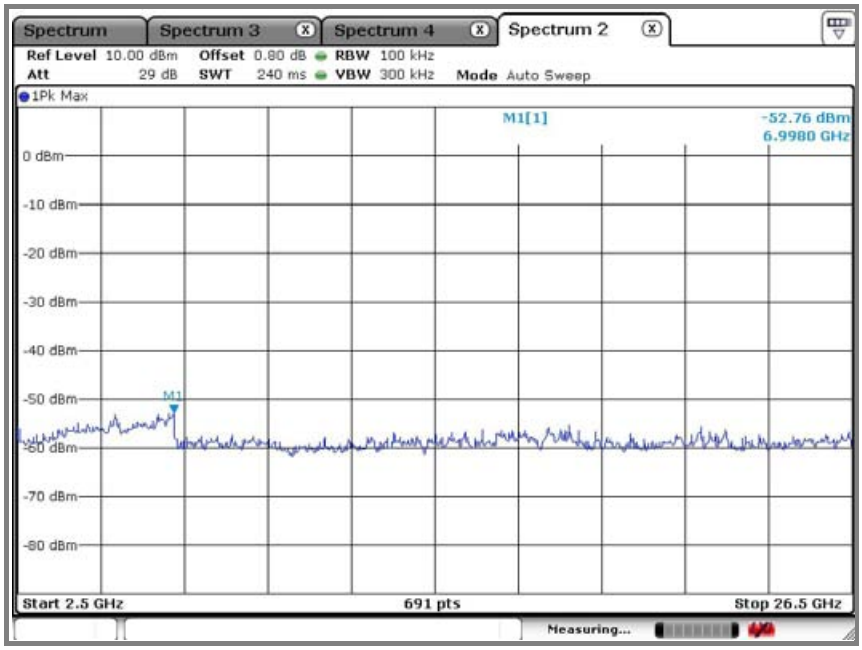

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

B. Middle channel (2 437 ㎒)

Reference level measurement

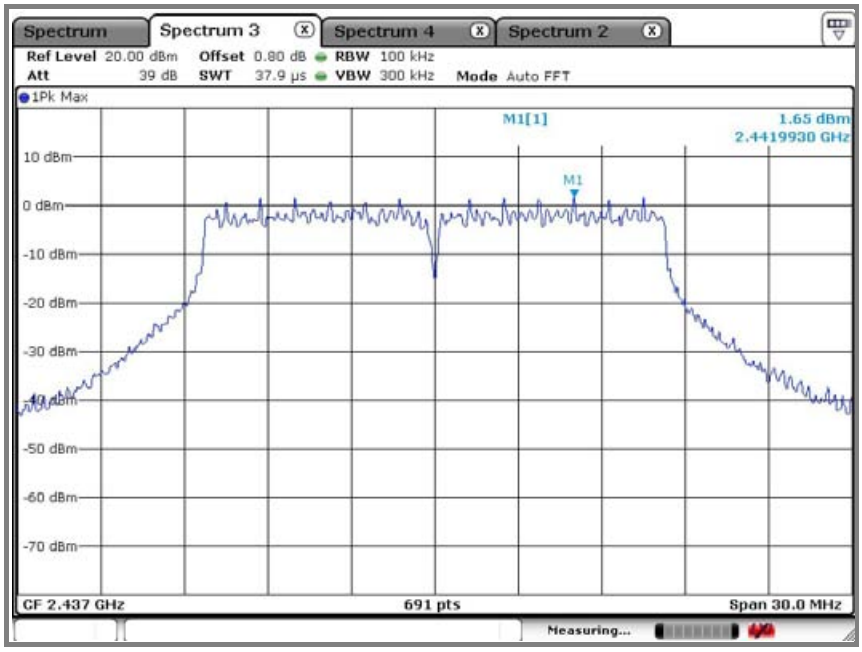

Emission level measurement 1

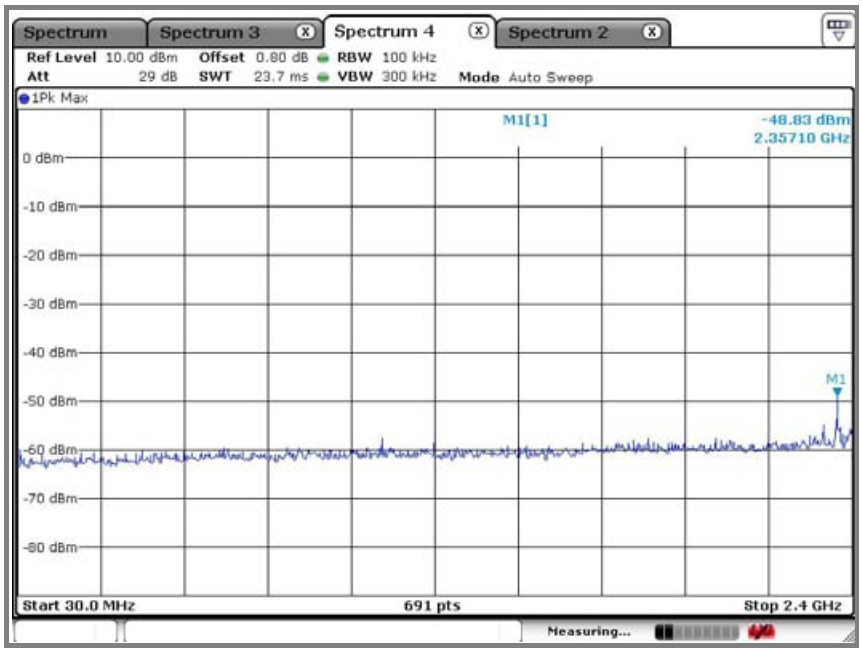

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

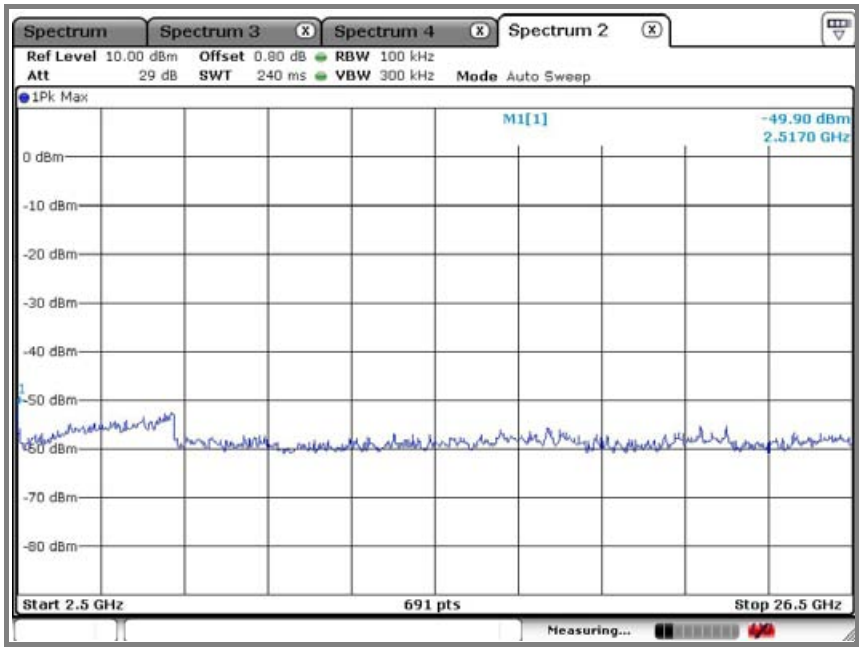

C. High channel (2 462 ㎒)

Reference level measurement

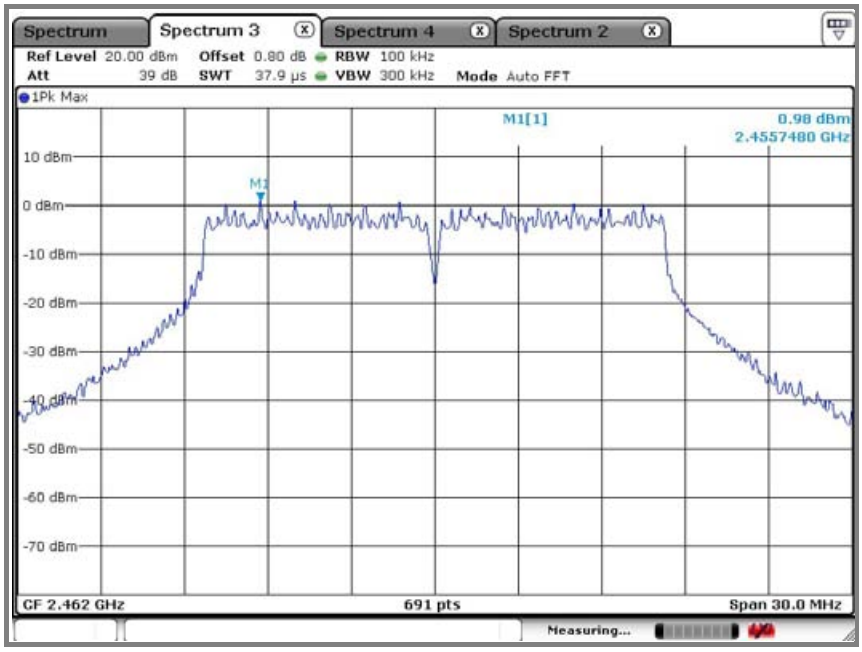

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 1

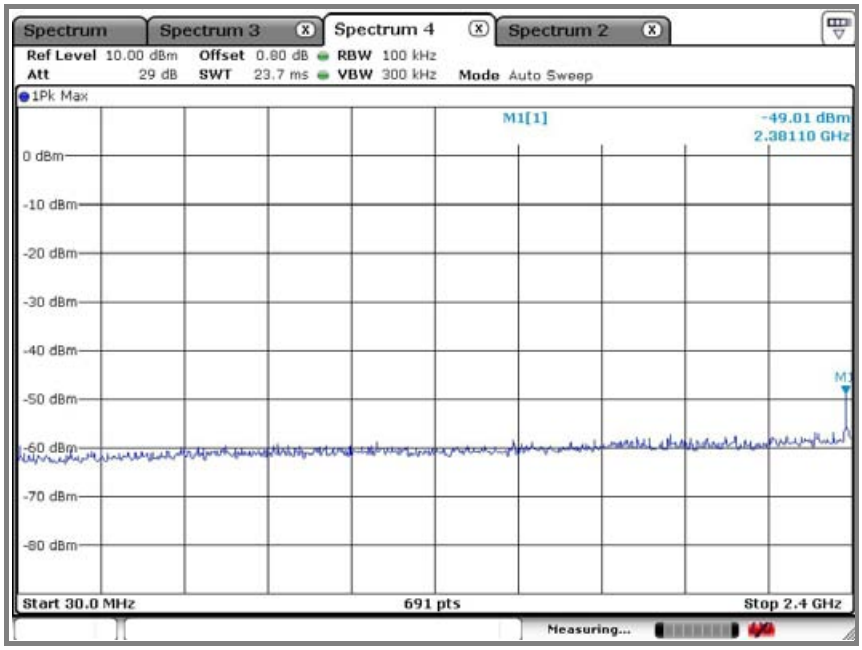

Emission level measurement 2

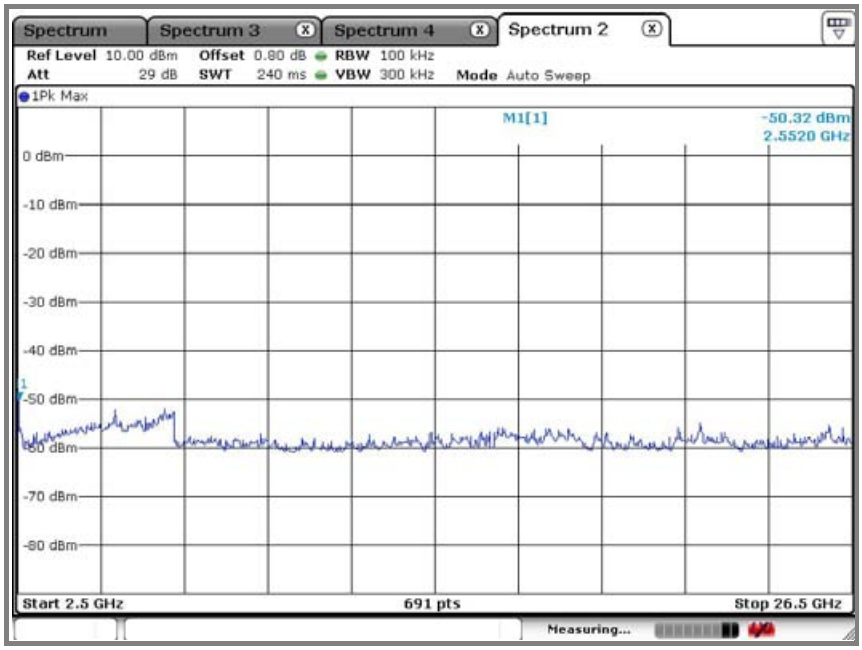

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_20 mode
A. Low channel (2 412 ㎒)

Reference level measurement

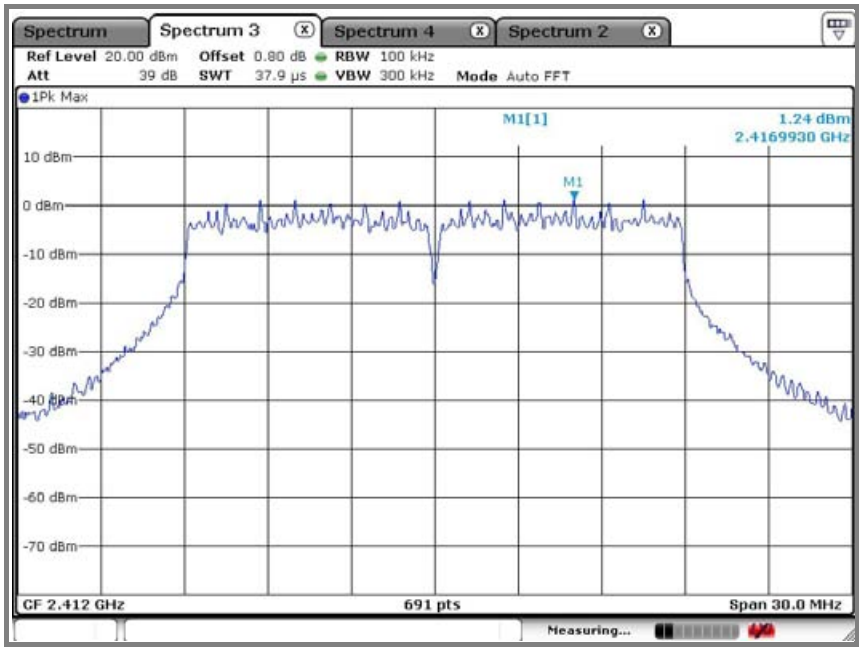

Emission level measurement 1

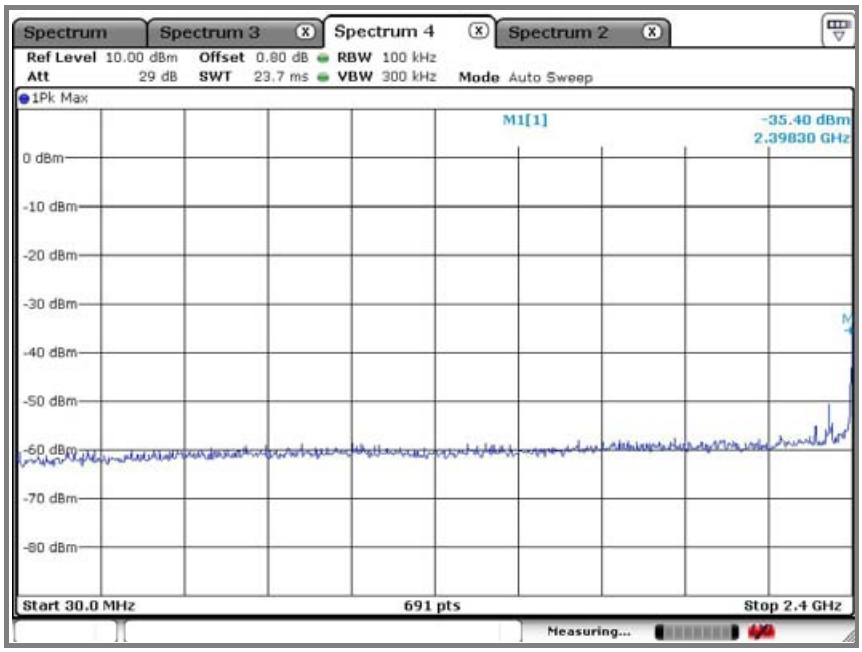

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

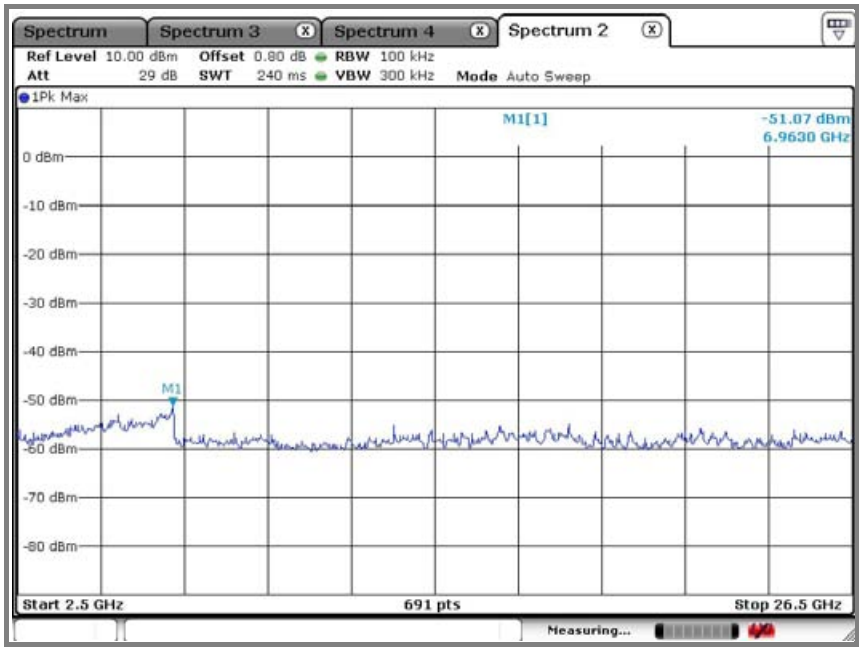

B. Middle channel (2 437 ㎒)

Reference level measurement

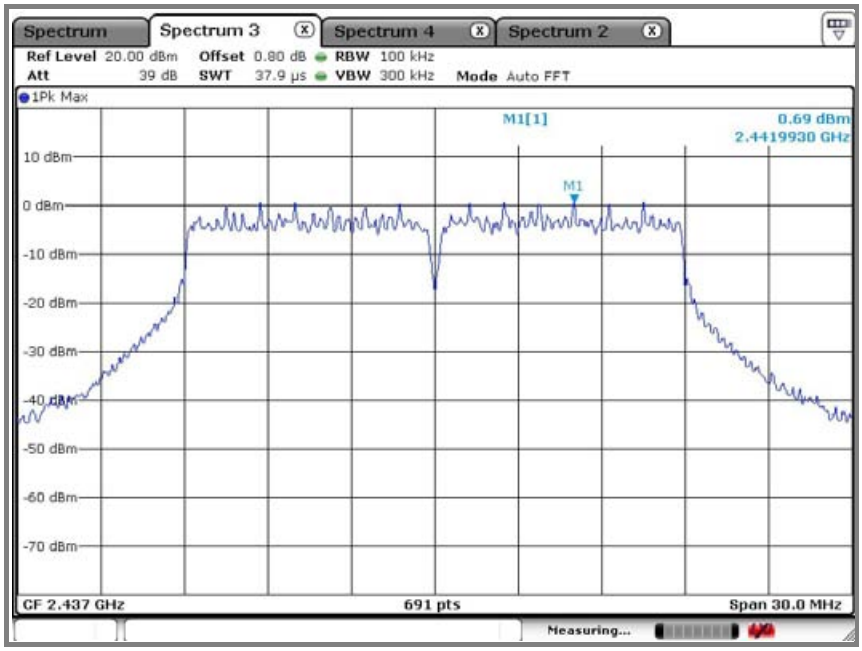

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 1

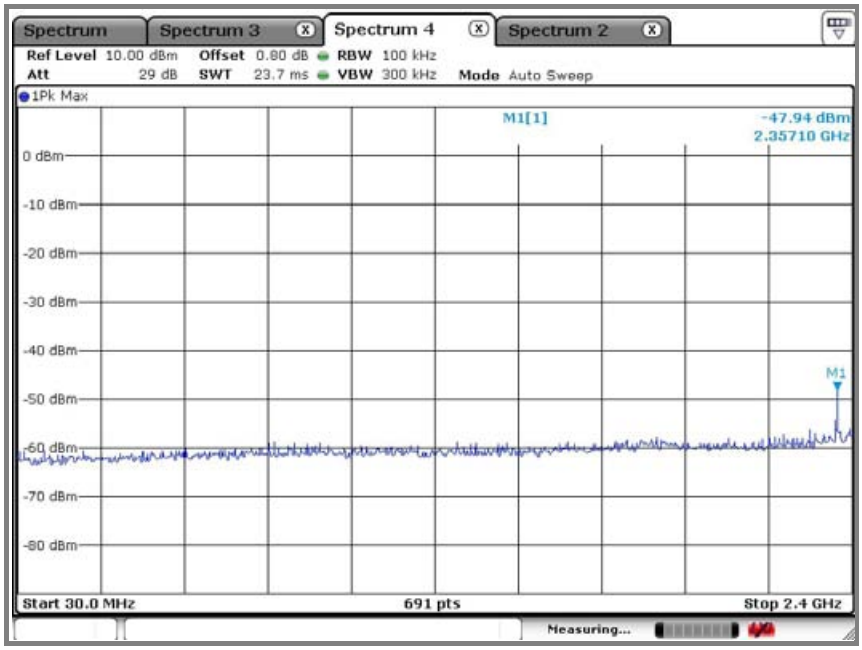

Emission level measurement 2

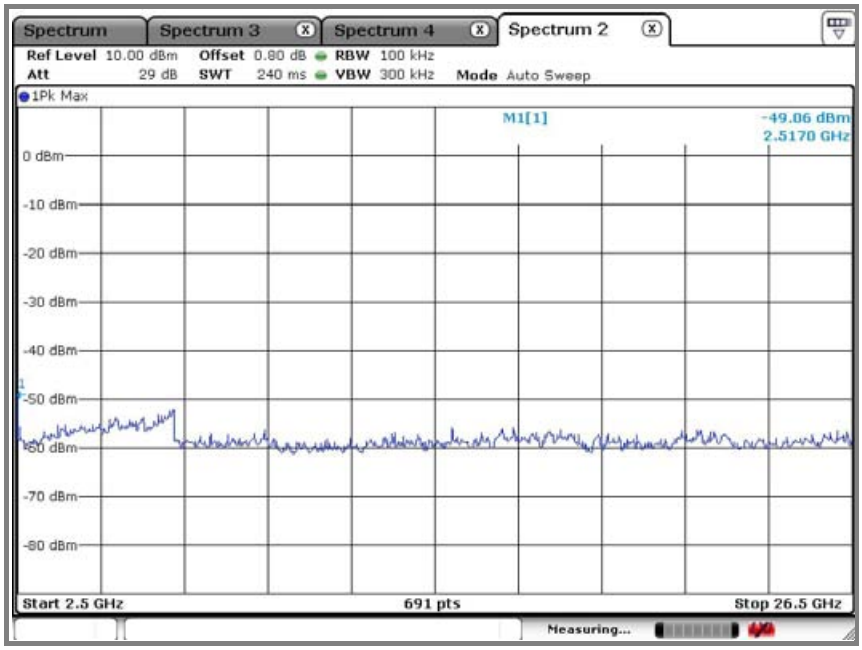

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 462 ㎒)

Reference level measurement

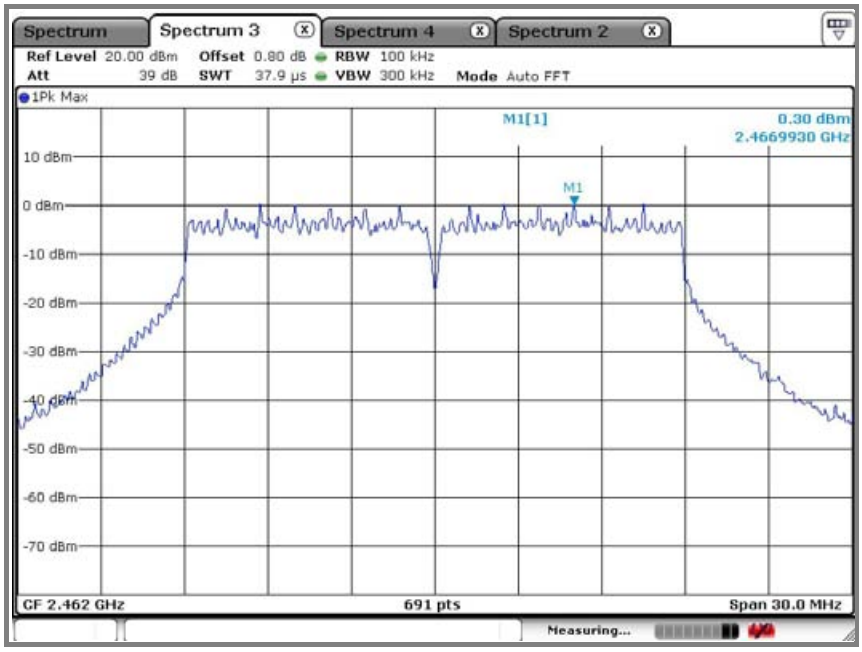

Emission level measurement 1

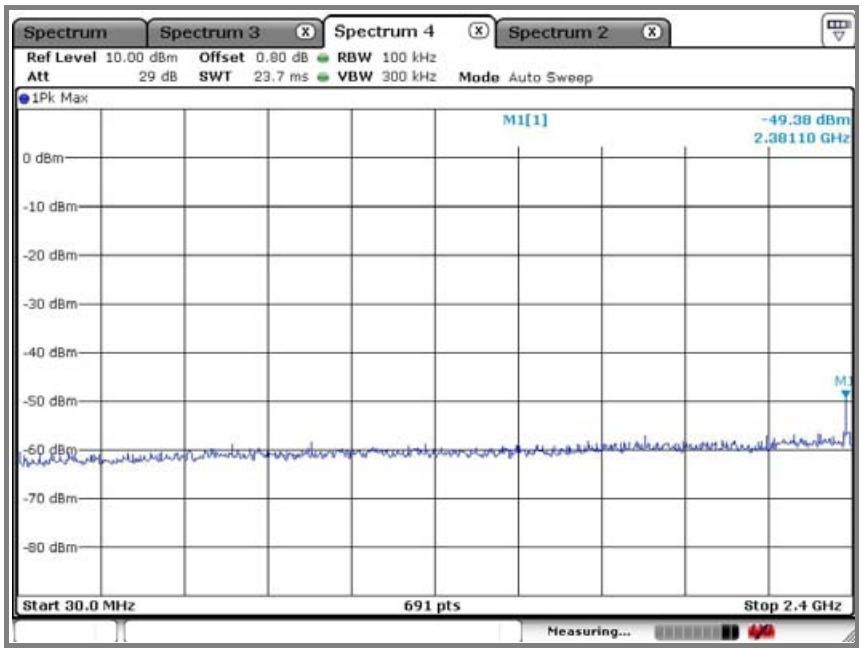

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

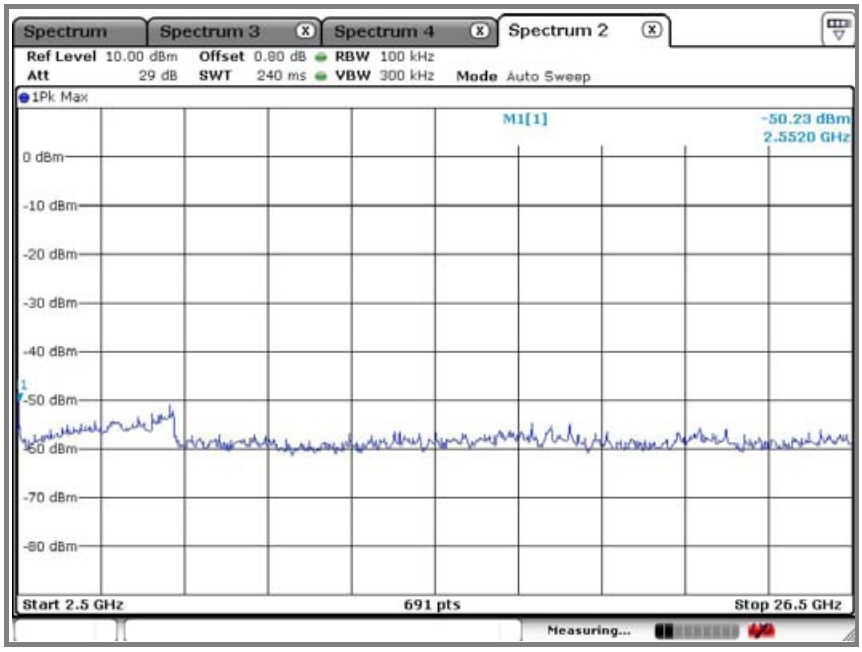

Operation mode: 802.11n_40 mode
A. Low channel (2 422 ㎒)

Reference level measurement

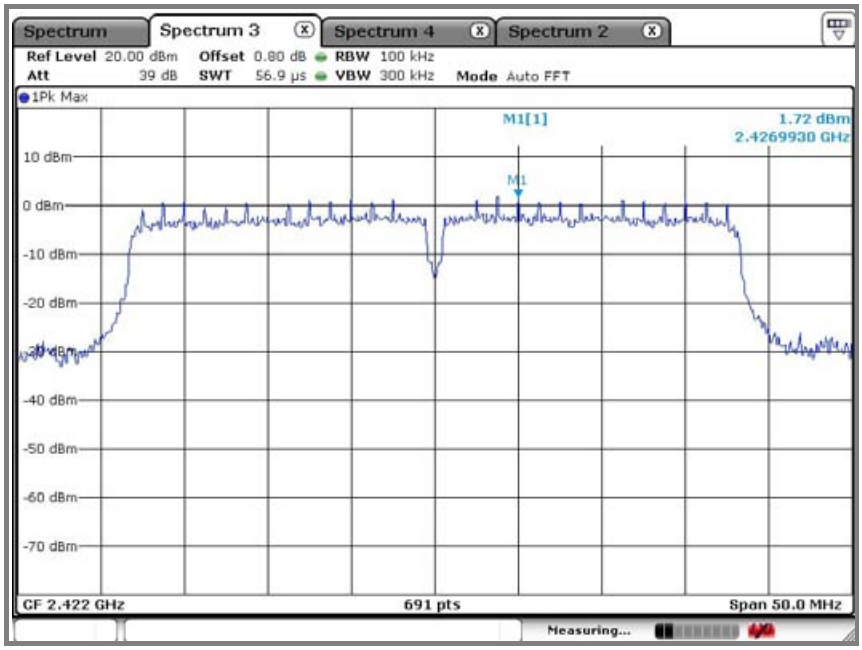

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 1

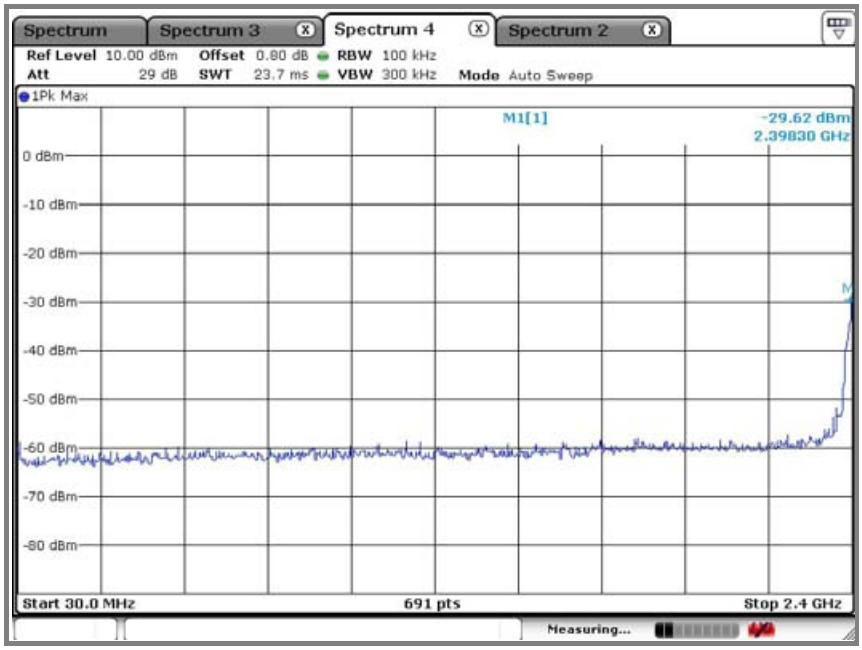

Emission level measurement 2

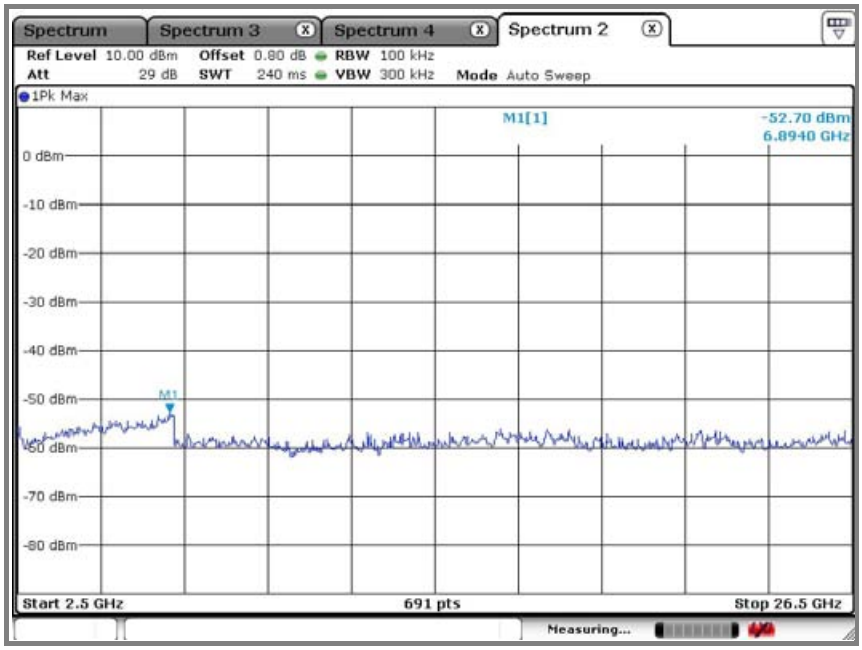

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

B. Middle channel (2 437 ㎒)

Reference level measurement

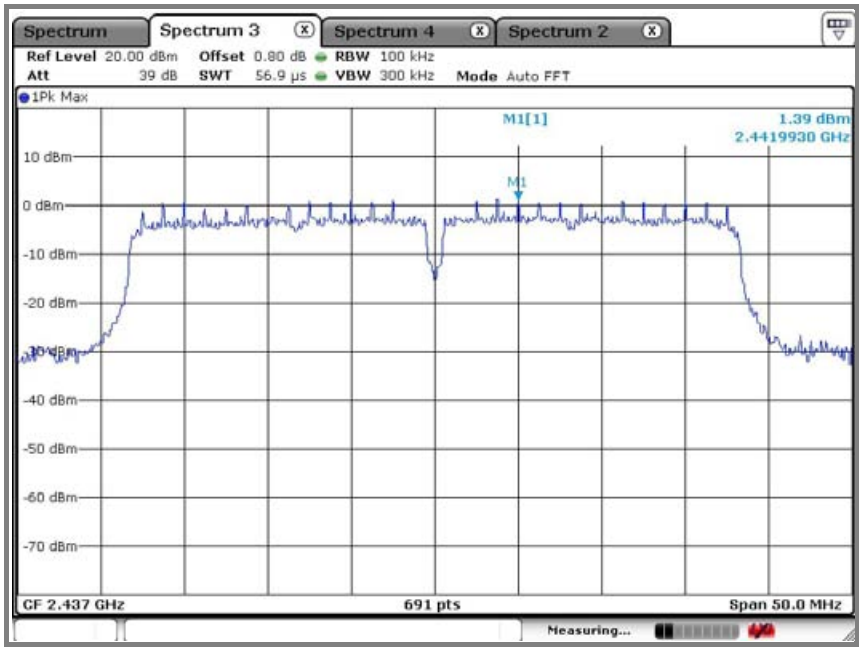

Emission level measurement 1

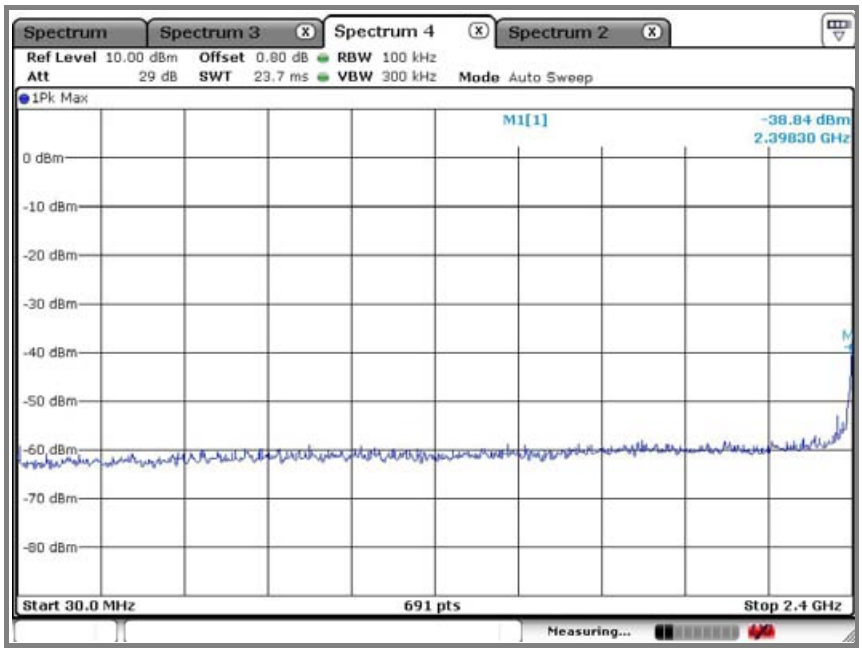

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

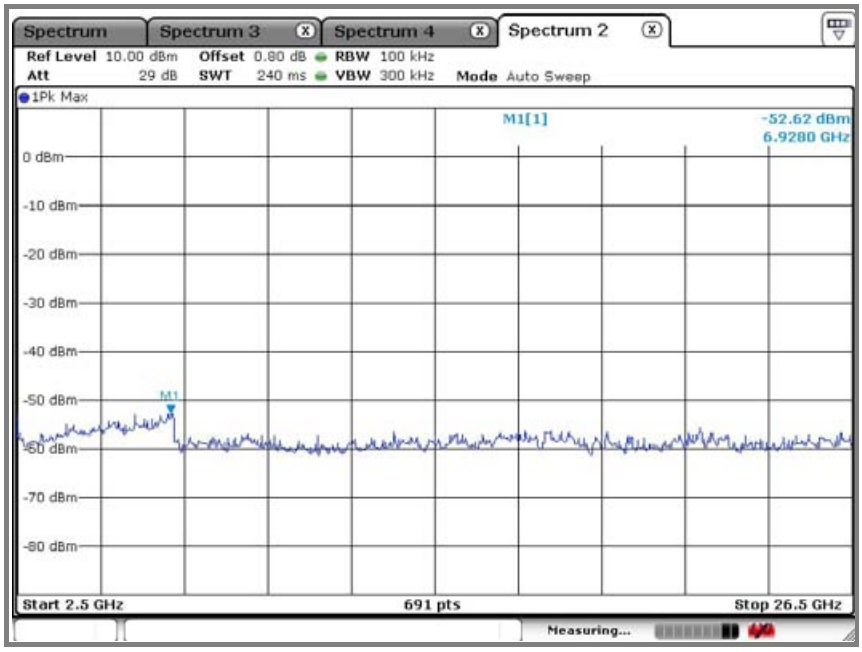

C. High channel (2 452 ㎒)

Reference level measurement

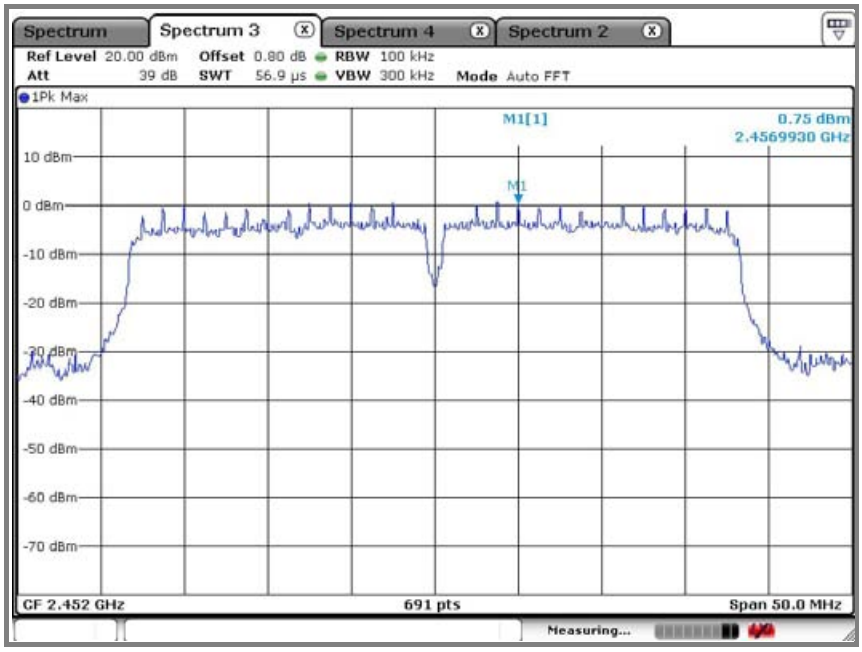

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 1

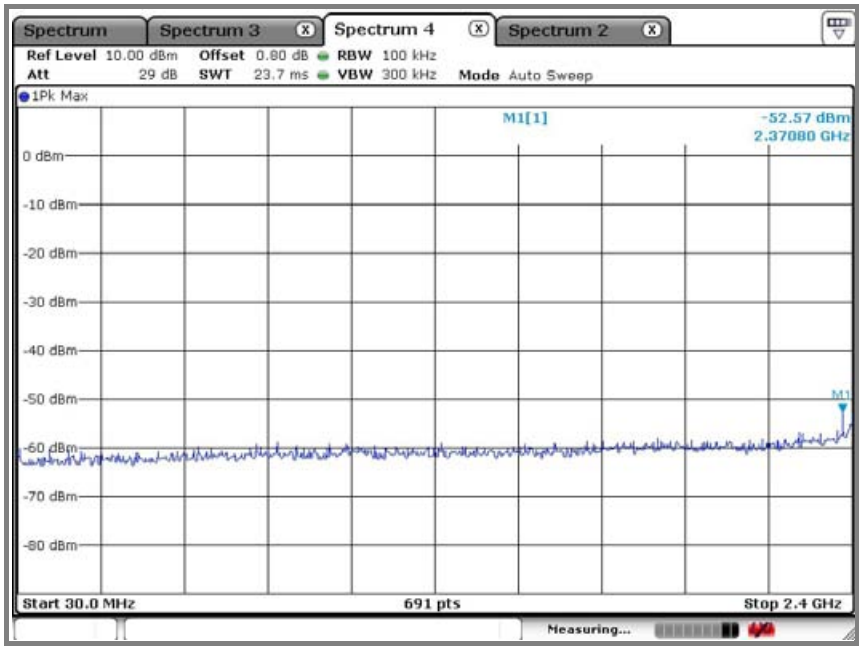

Emission level measurement 2

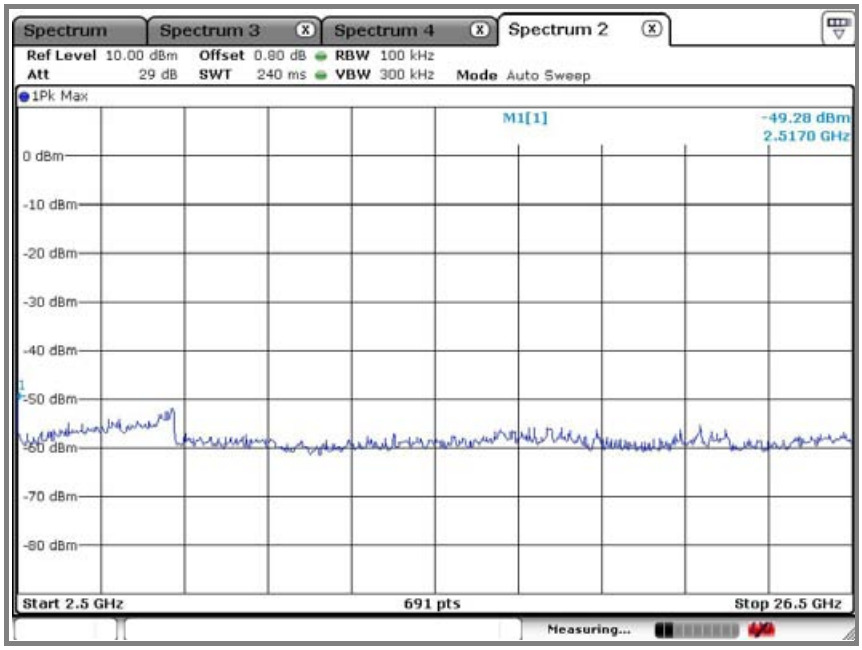

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: Zigbee mode
A. Low channel (2 405 ㎒)

Reference level measurement

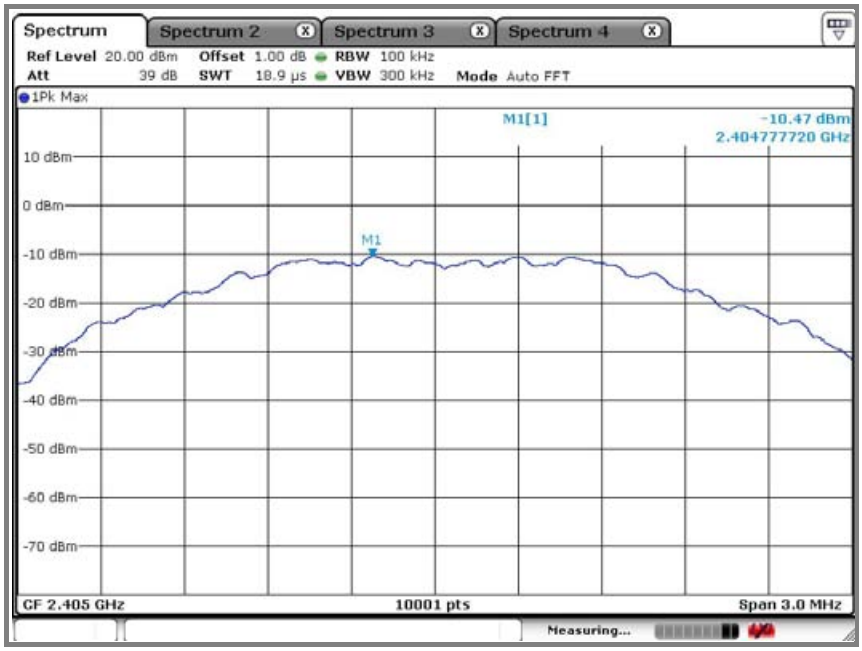

Emission level measurement 1

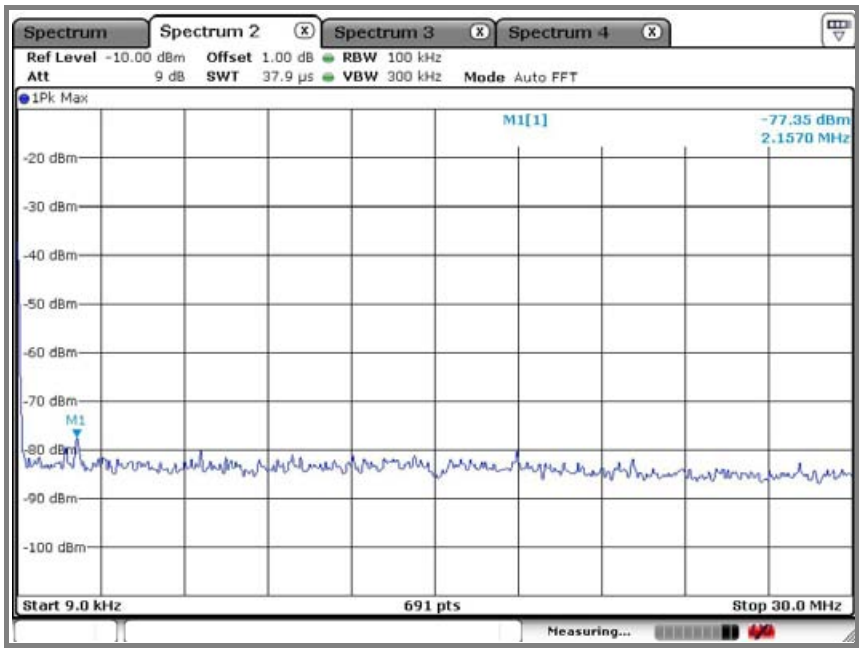

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

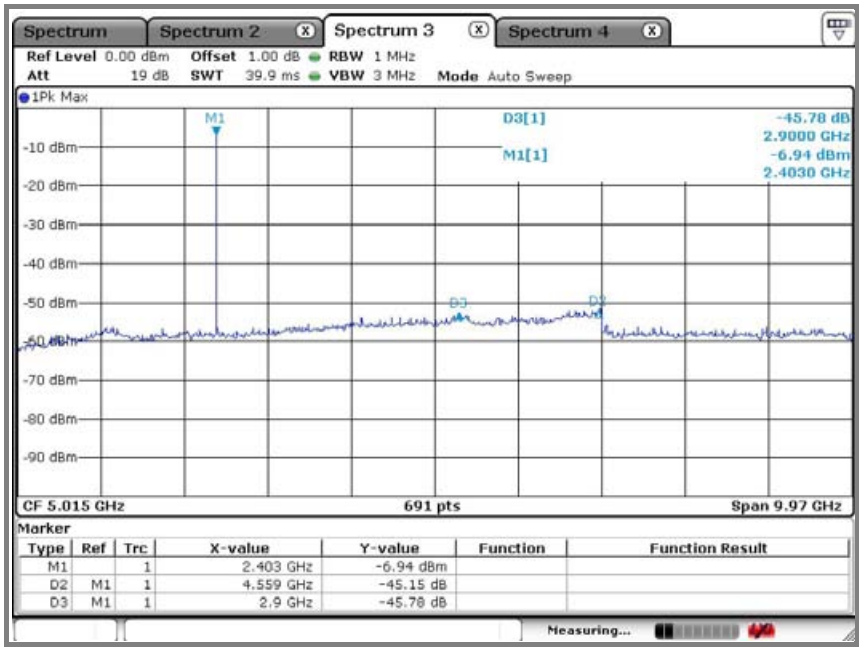

Emission level measurement 3

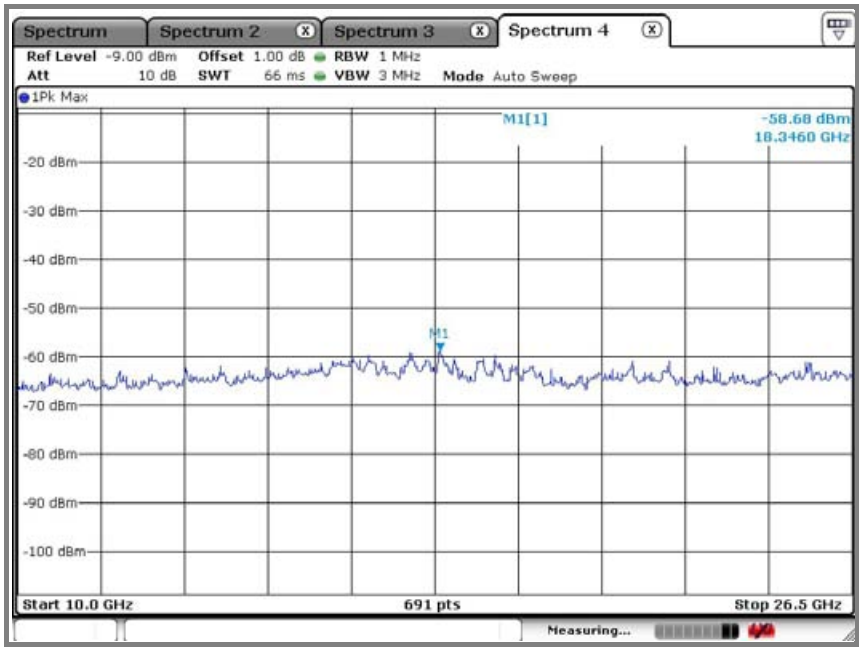

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

B. Middle channel (2 440 ㎒)

Reference level measurement

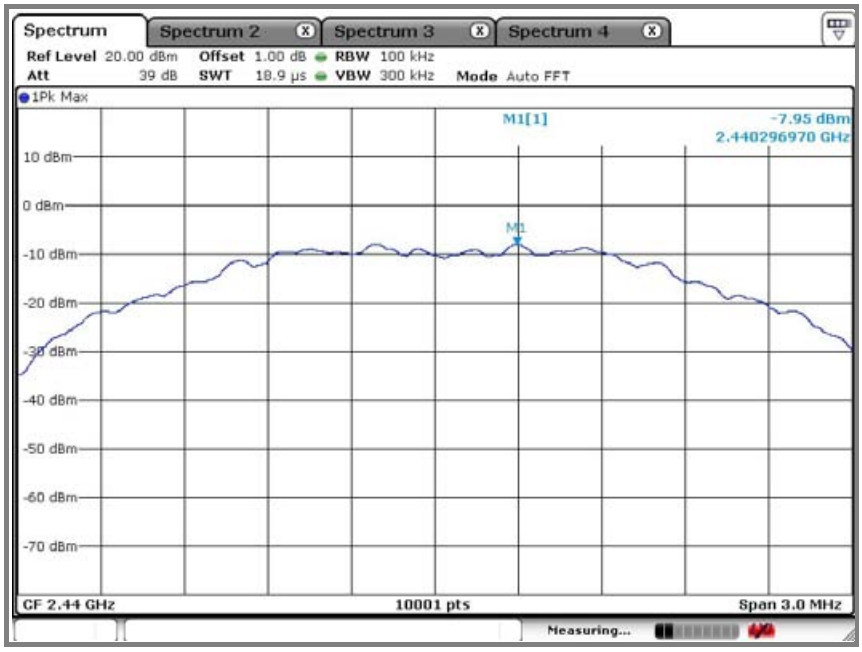

Emission level measurement 1

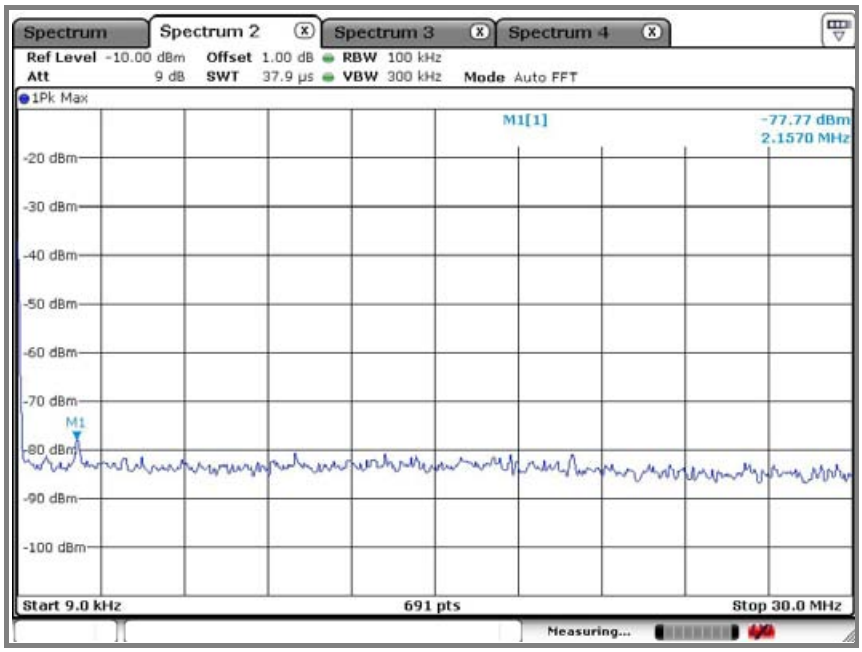

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

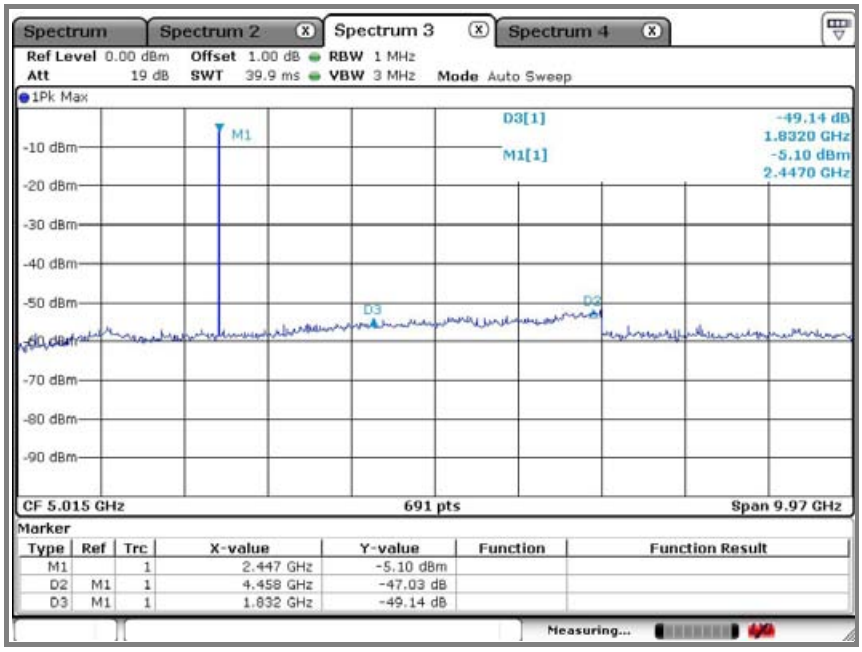

Emission level measurement 3

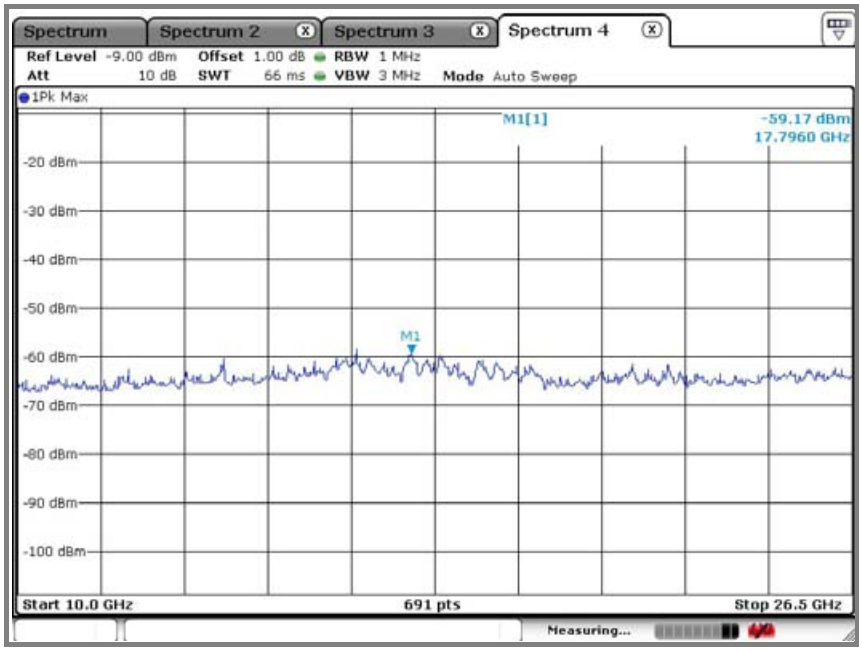

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 480 ㎒)

Reference level measurement

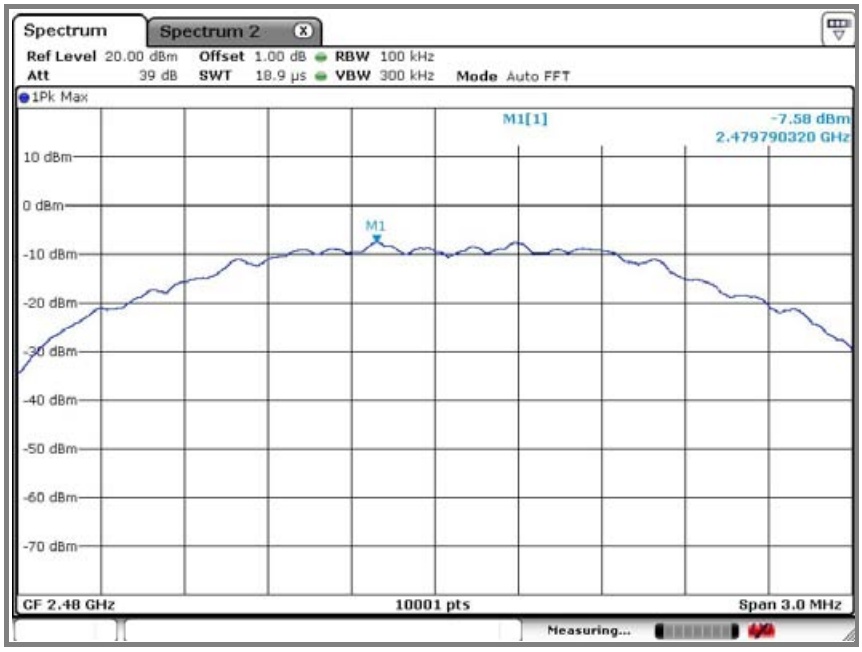

Emission level measurement 1

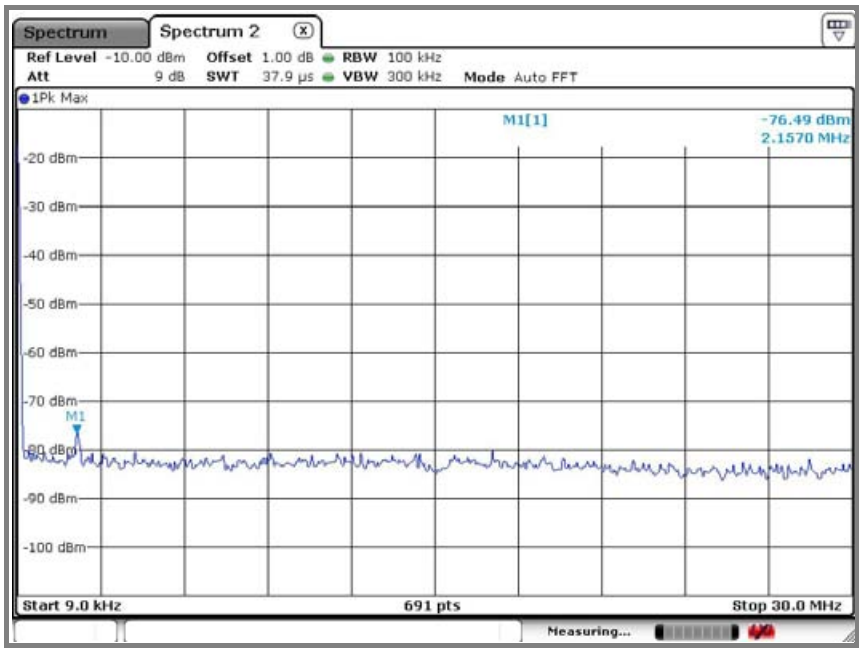

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Emission level measurement 2

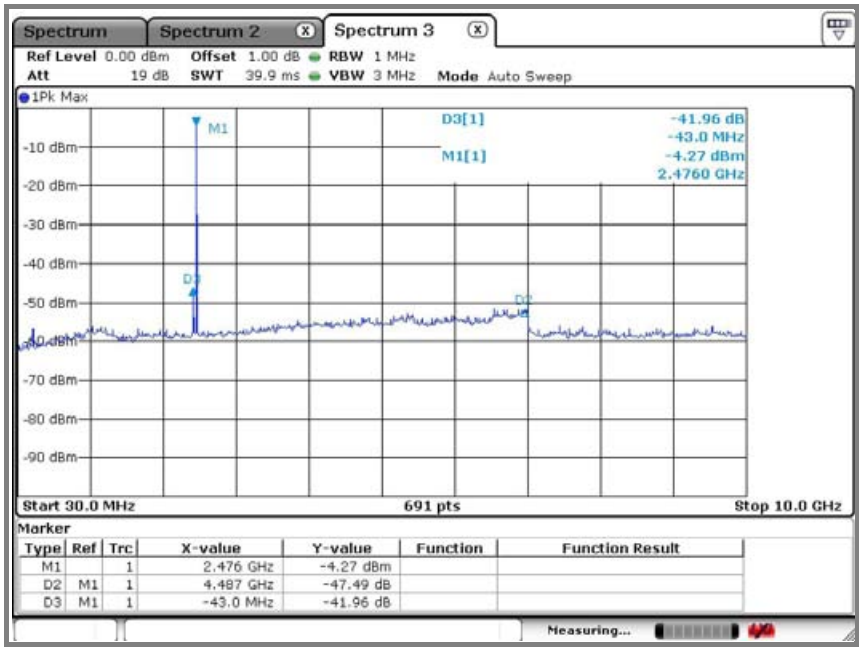

Emission level measurement 3

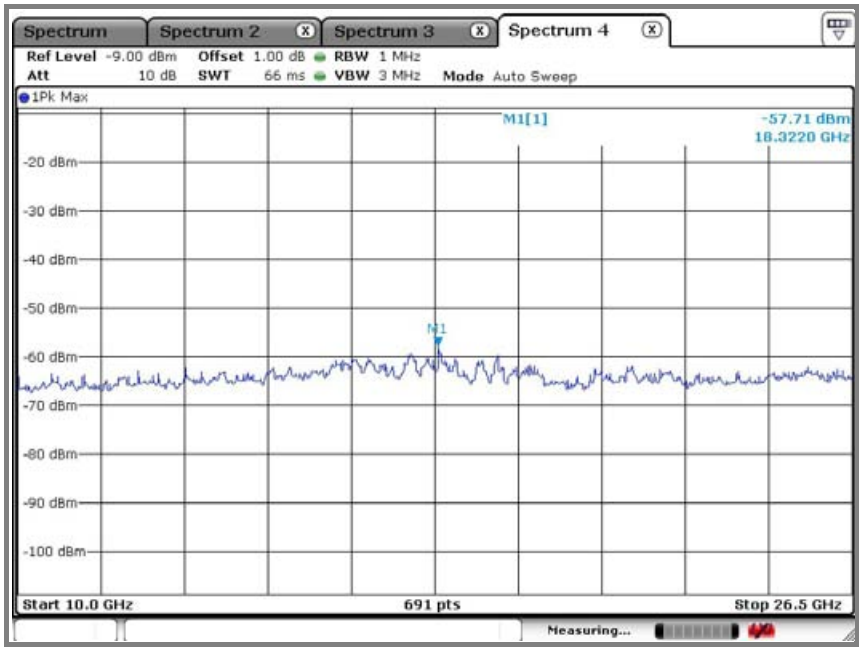

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

5. 6 dB bandwidth

5.1. Test setup



6.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902~928 ㎒, 2 400~2 483.5 ㎒, and 5 725~5 825 ㎒ bands. The minimum of 6 dB Bandwidth shall be at least 500 ㎑

6.3. Test procedure

1. The 6 dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 6 dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 ㎑, VBW = 100 ㎑, Span = 5 ㎒.

6.4. Test results

Ambient temperature: 23 ℃
Relative humidity: 51 % R.H.

Mode	Frequency(㎒)	6 dB bandwidth(㎒)
802.11b	2 412	9.421
	2 437	9.421
	2 462	9.899
802.11g	2 412	16.541
	2 437	16.498
	2 462	16.498
802.11n_20	2 412	17.713
	2 437	17.713
	2 462	17.713
802.11n_40	2 422	35.818
	2 437	35.890
	2 452	35.818
Zigbee	2 405	1.621
	2 440	1.621
	2 480	1.635

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11b mode

A. Low channel (2 412 ㎒)

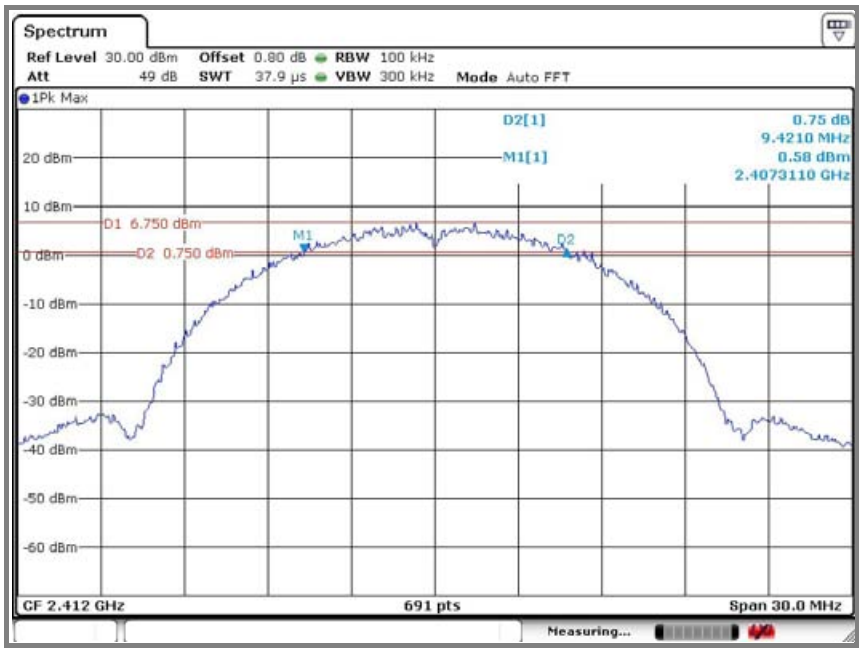

B. Middle channel (2 437 ㎒)

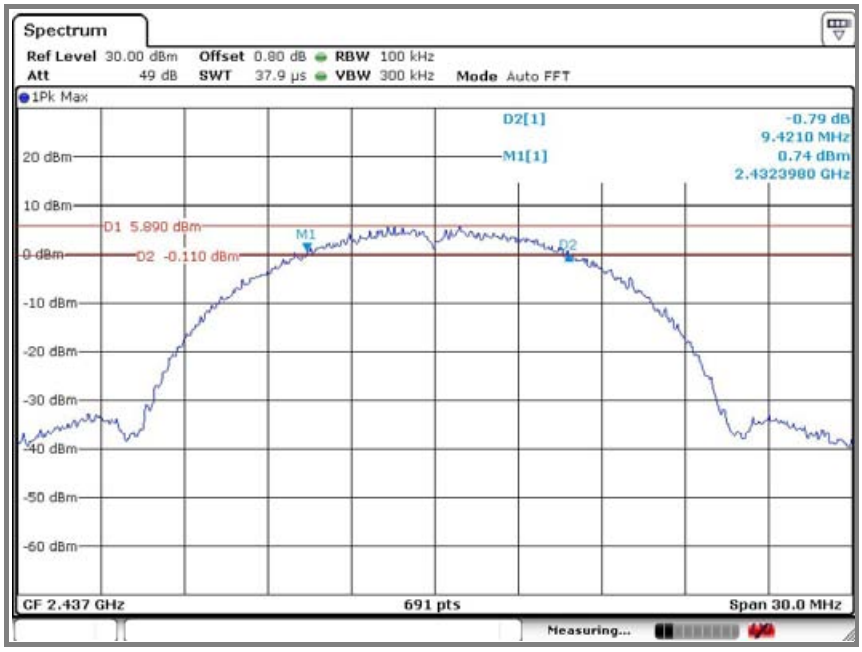

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 462 ㎒)

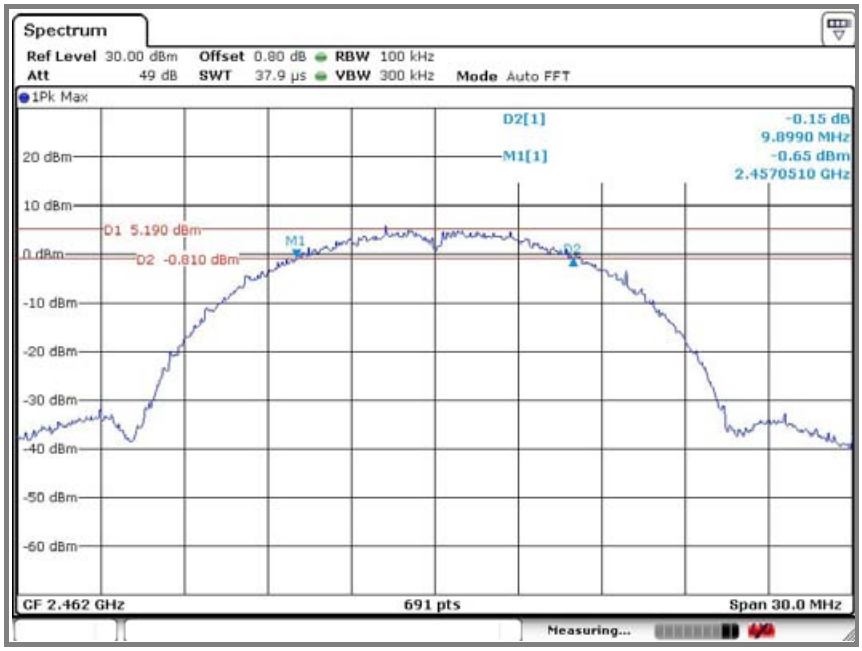

Operation mode: 802.11g mode

A. Low channel (2 412 ㎒)

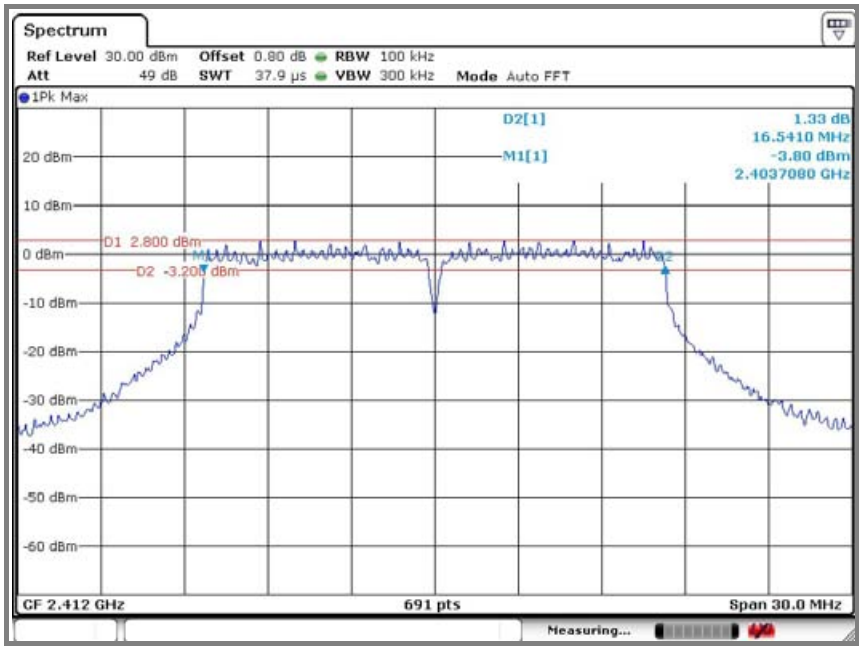

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

B. Middle channel (2 437 ㎒)

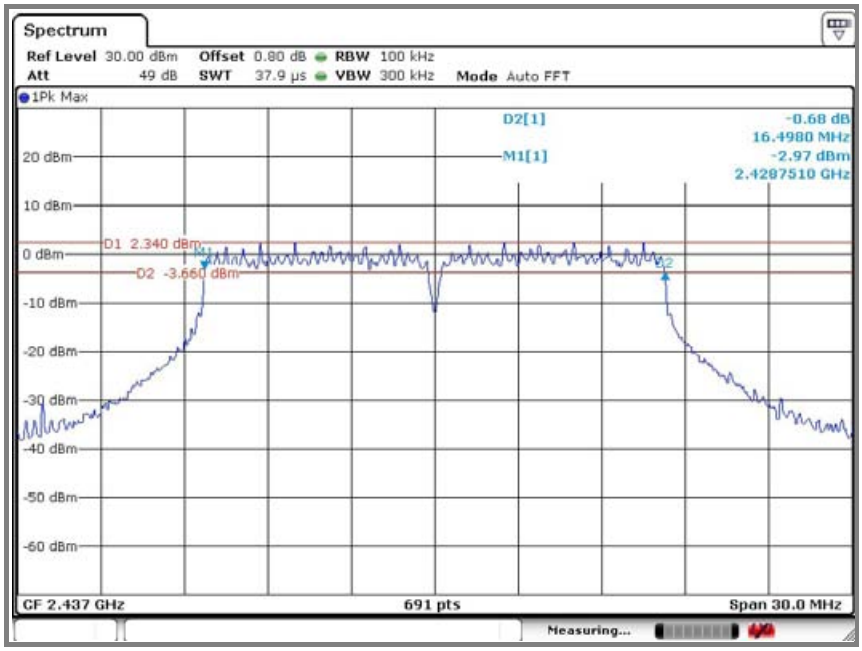

C. High channel (2 462 ㎒)

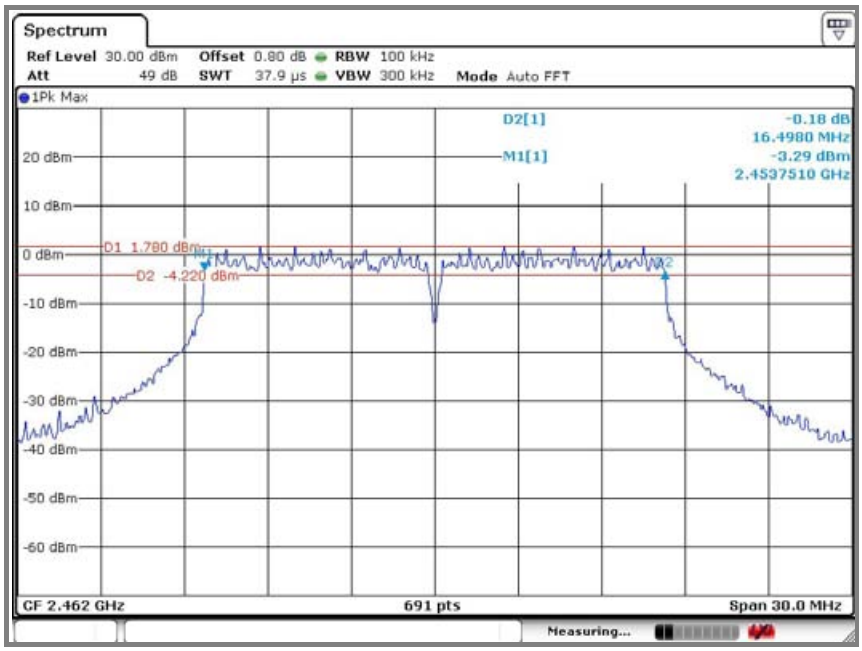

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_20 mode

A. Low channel (2 412 ㎒)

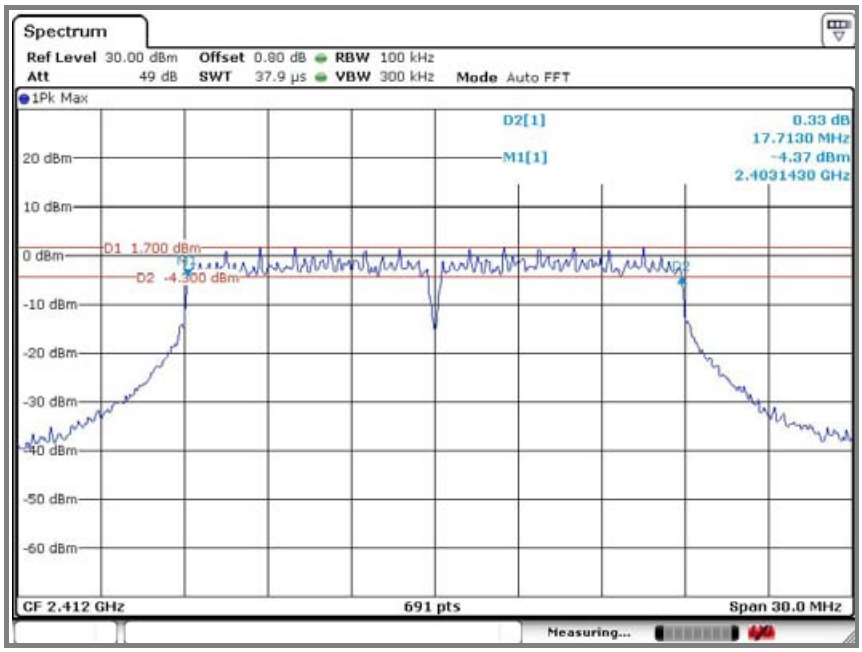

B. Middle channel (2 437 ㎒)

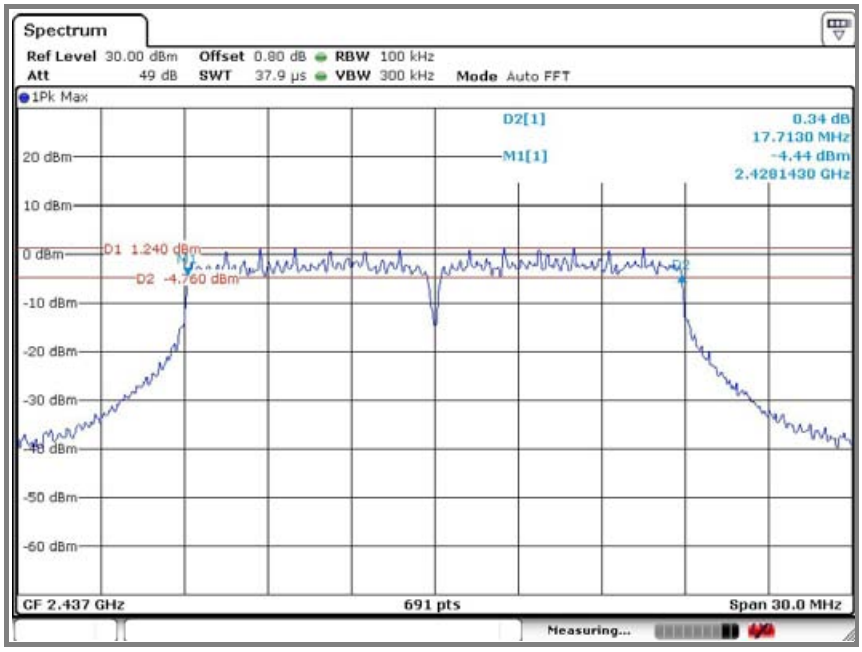

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 462 ㎒)

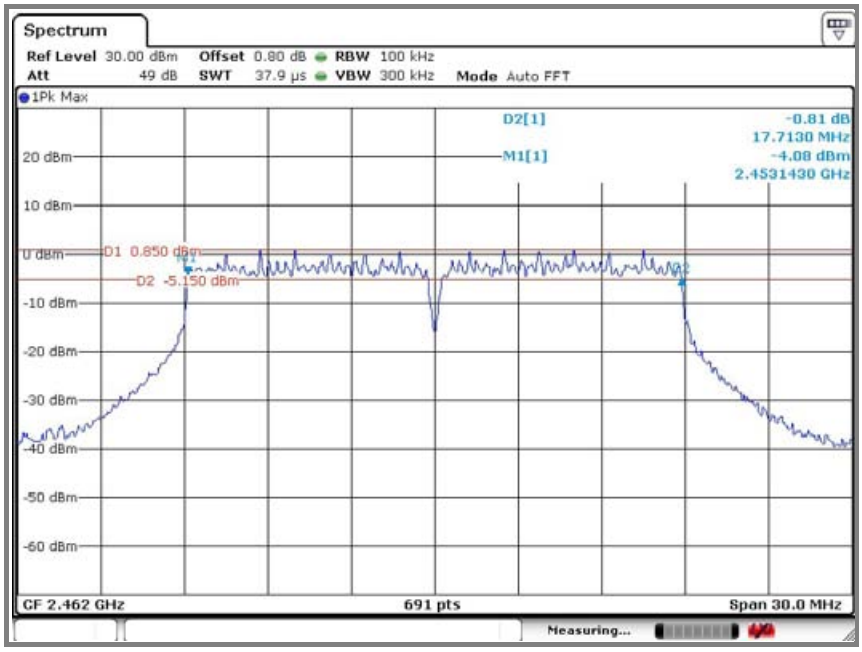

Operation mode: 802.11n_40 mode

A. Low channel (2 422 ㎒)

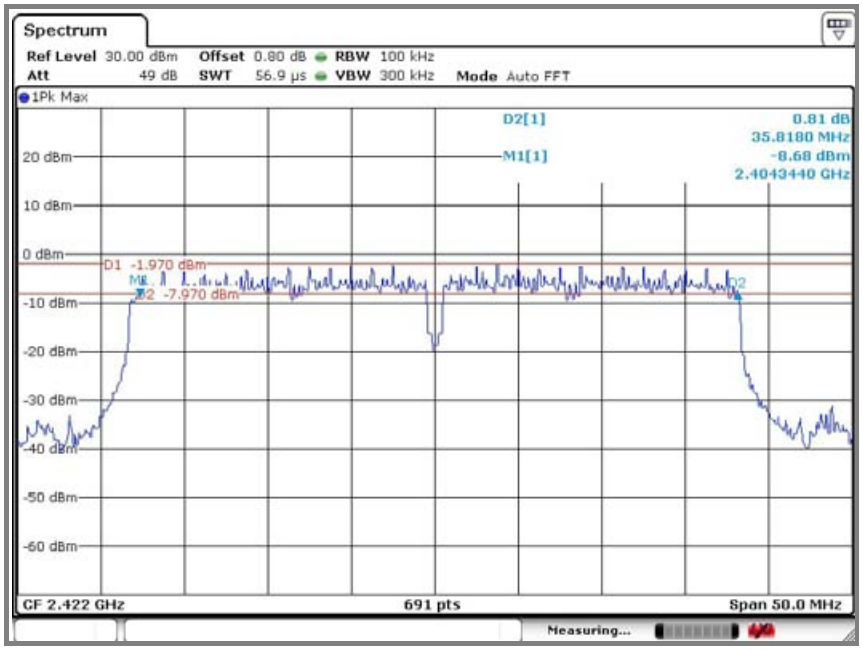

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

B. Middle channel (2 437 ㎒)

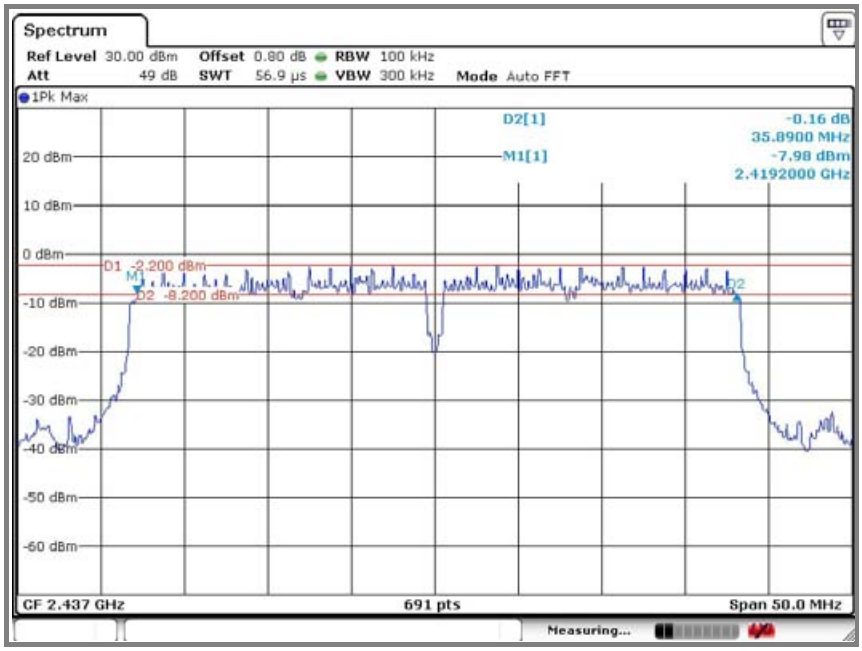

C. High channel (2 452 ㎒)

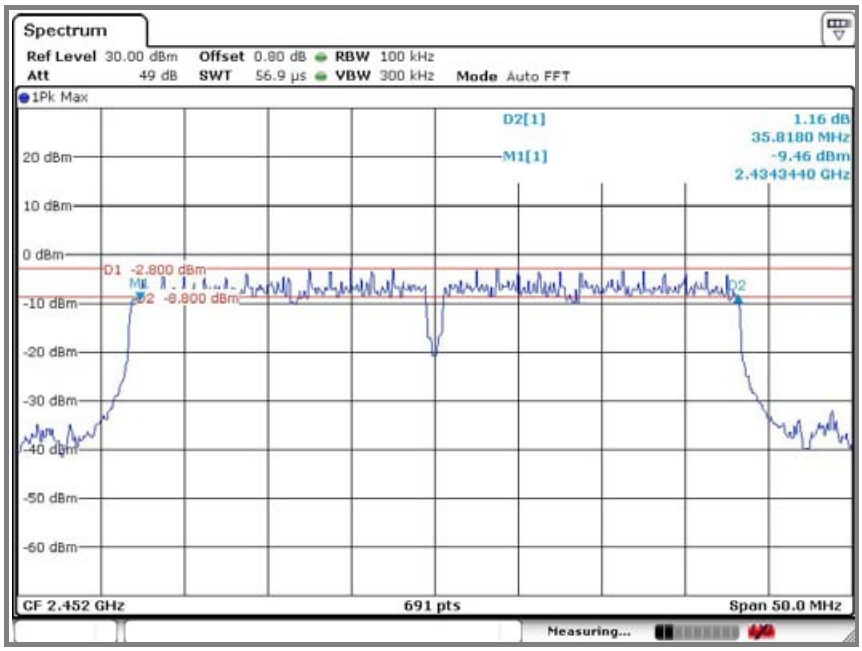

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: Zigbee mode

A. Low channel (2 405 ㎒)

B. Middle channel (2 440 ㎒)

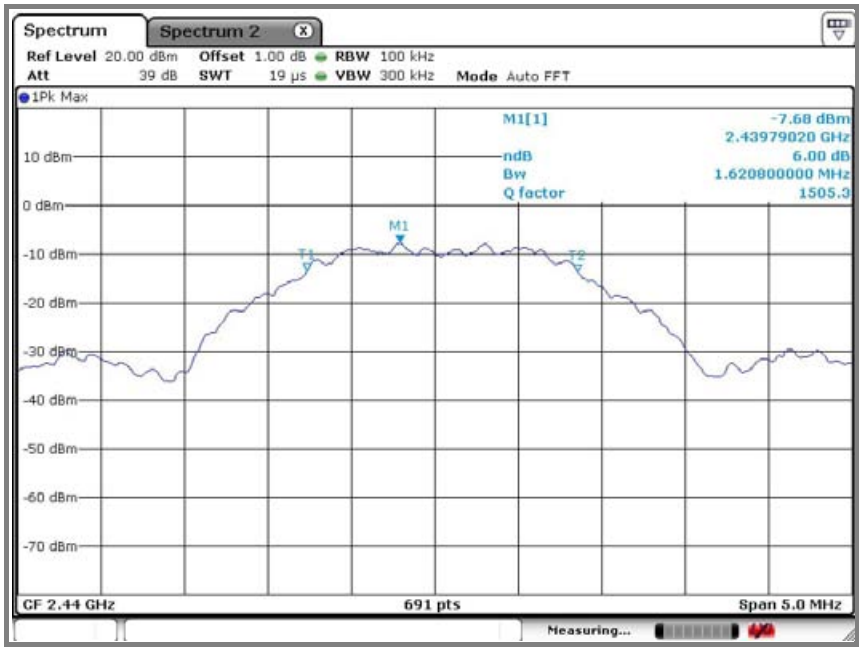

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 480 ㎒)

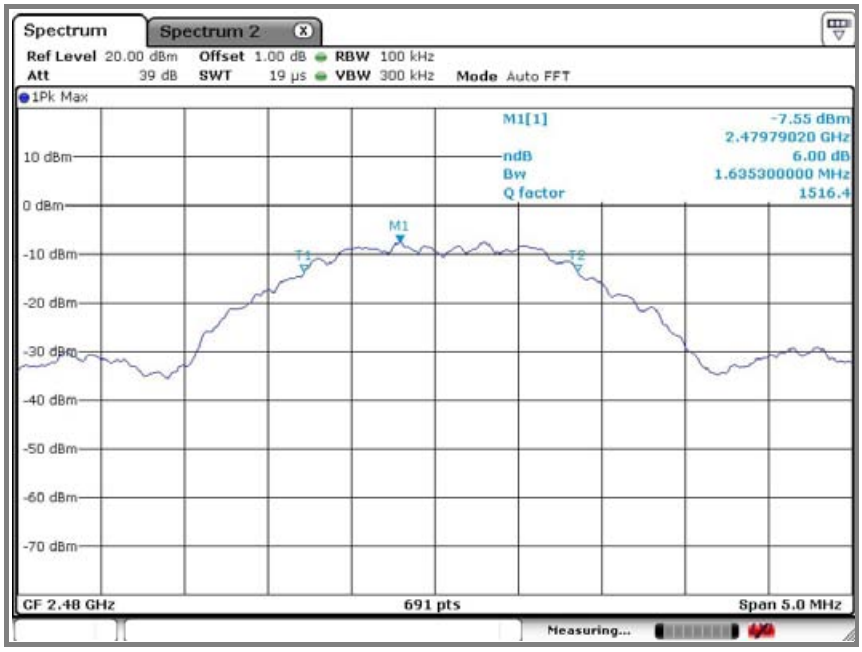

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

6. Maximum Output Power Measurement

6.1. Test setup. (WLAN)



Test Setup. (Zigbee)



6.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:
1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 ㎑ or the 6 ㏈ bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 ㎽
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 ㎒ employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 ㎒ band: 1 Watt.

6.3 Test procedure

6.3.1 WLAN

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter(PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

6.3.2 Zigbee

Maximum Peak Conducted Output Power is measured using the following procedure (RBW ≥ DTS bandwidth).
1. Set the RBW ≥ DTS bandwidth.
2. Set VBW ≥ 3 x RBW. / Set span ≥ 3 x RBW.
4. Sweep time = auto couple
5. Detector = peak
6. Trace mode = max hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

6.4 Test results

Ambient temperature: 23 ℃
Relative humidity: 51 % R.H.

Mode	Frequency (㎒)	Conducted power (㏈m)	Limit (㏈m)
802.11b	2 412	15.13	30
	2 437	14.60	
	2 462	14.34	
802.11g	2 412	8.20	30
	2 437	7.76	
	2 462	6.90	
802.11n_20	2 412	7.10	30
	2 437	6.44	
	2 462	5.43	
802.11n_40	2 422	3.83	30
	2 437	3.45	
	2 452	2.69	
Zigbee*	2 405	-6.56	30
	2 440	-4.65	
	2 480	-4.17	

**note: Refer to next page (test plots)*

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: Zigbee mode

A. Low channel (2 405 ㎒)

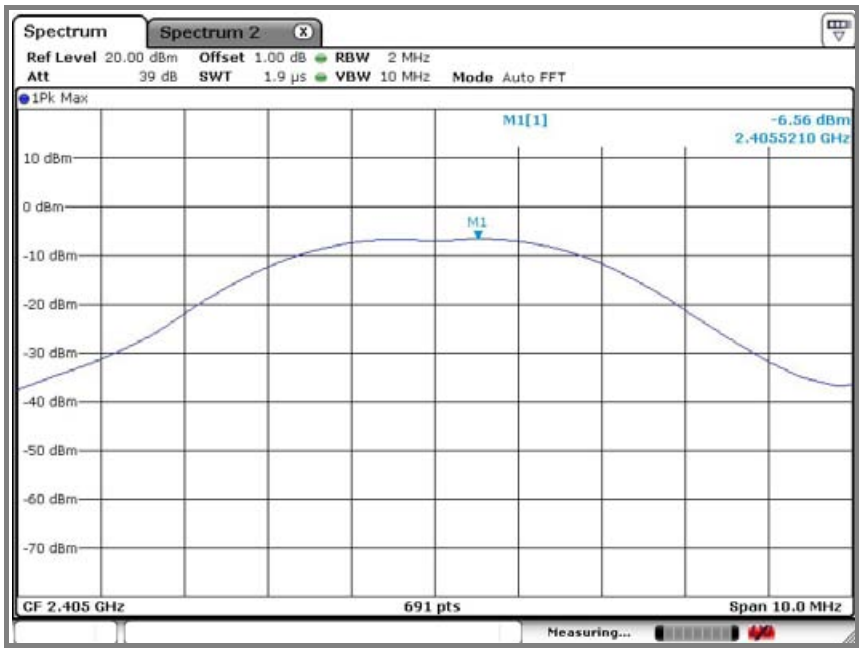

B. Middle channel (2 440 ㎒)

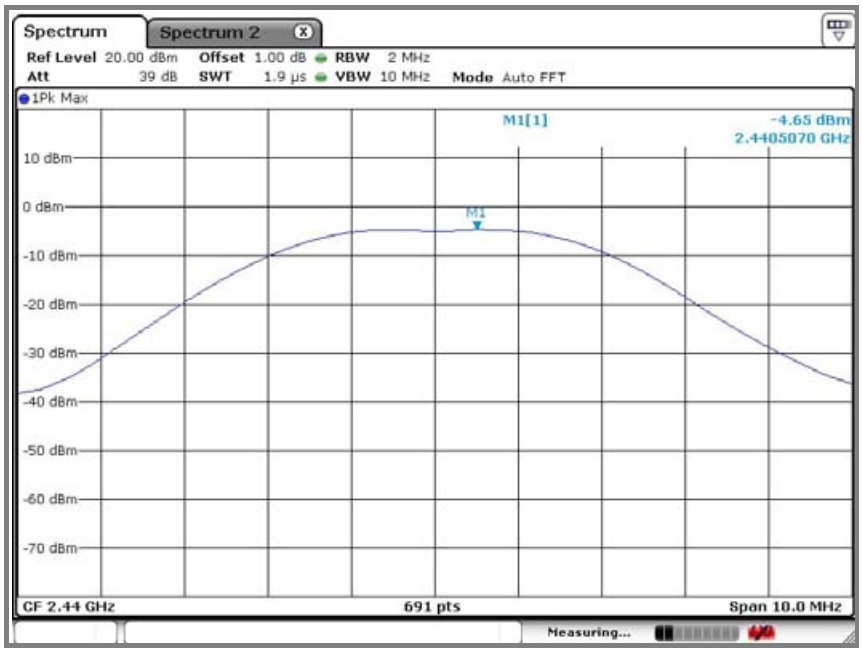

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 480 ㎒)

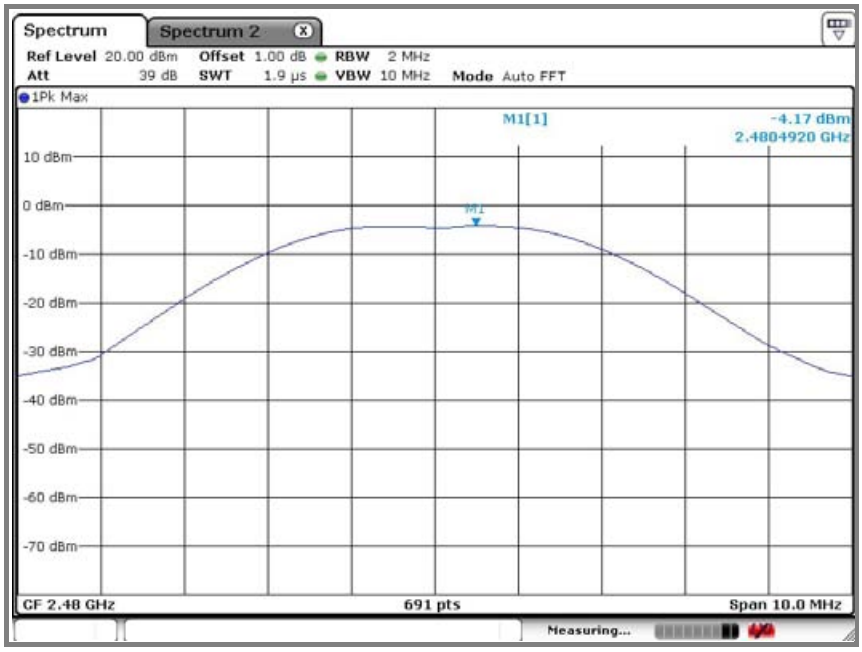

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

7. Power Spectral Density Measurement

7.1. Test setup



7.2. Limit

< 8dBm @ 3kHz BW

7.3. Test procedure (PKPSD)

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using;
   Span = 1.5 times the DTS bandwidth
   RBW = 3㎑ ≤ RBW ≤ 100㎑
   VBW ≥ 3 x RBW, Sweep = Auto couple
   Detector function = peak, Trace = max hold

7.4. Test results

Ambient temperature: 23 ℃
Relative humidity: 51 % R.H.

Operation mode	Frequency (㎒)	Peak output power(dBm)	Limit (dBm)
802.11b	2 412	-1.05	8
	2 437	-3.52	
	2 462	-3.96	
802.11g	2 412	-6.72	8
	2 437	-7.19	
	2 462	-6.89	
802.11n_20	2 412	-8.12	8
	2 437	-8.30	
	2 462	-8.68	
802.11n_40	2 422	-11.64	8
	2 437	-11.08	
	2 452	-12.47	
Zigbee	2 405	-10.29	8
	2 440	-7.66	
	2 480	-7.72	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11b mode

A. Low channel (2 412 ㎒)

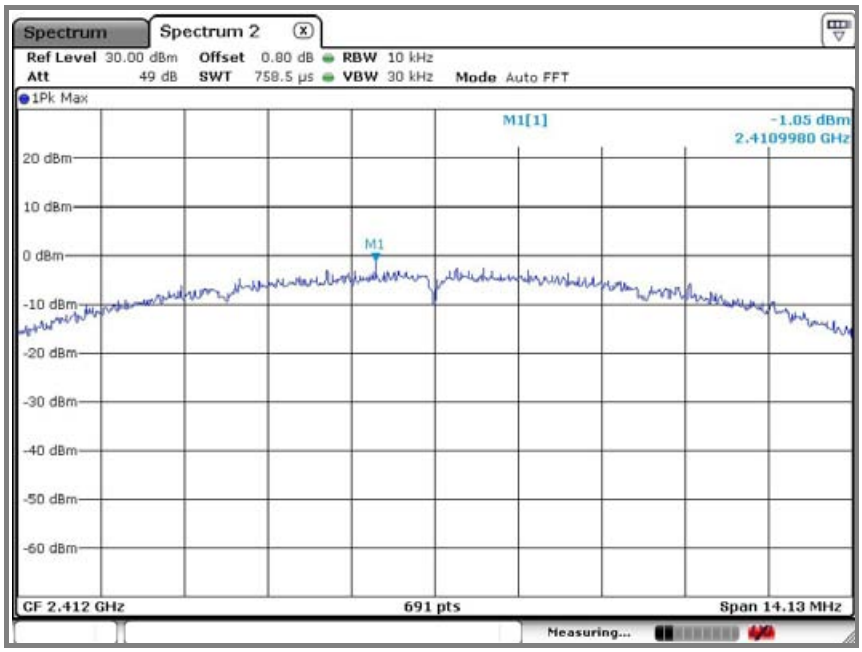

B. Middle channel (2 437 ㎒)

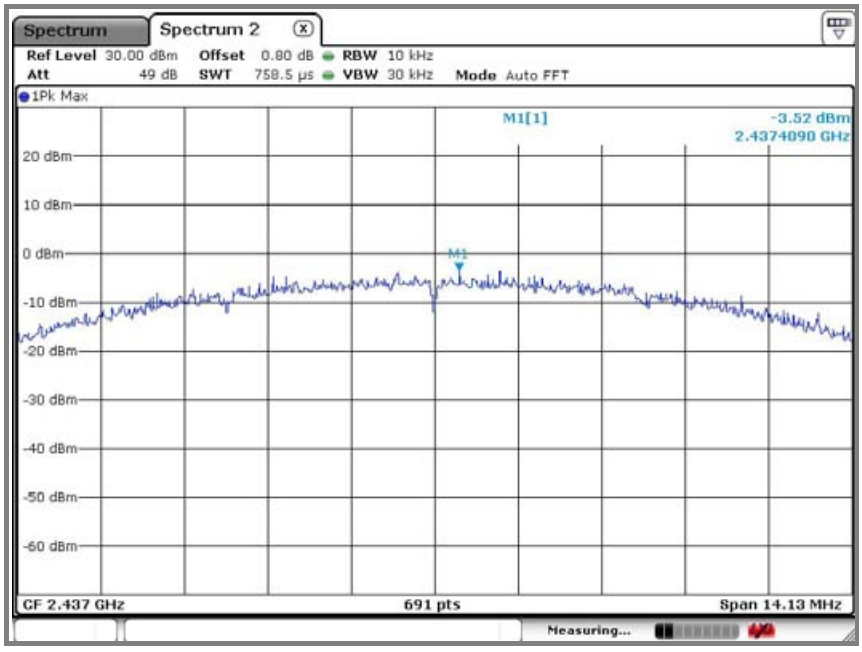

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 462 ㎒)

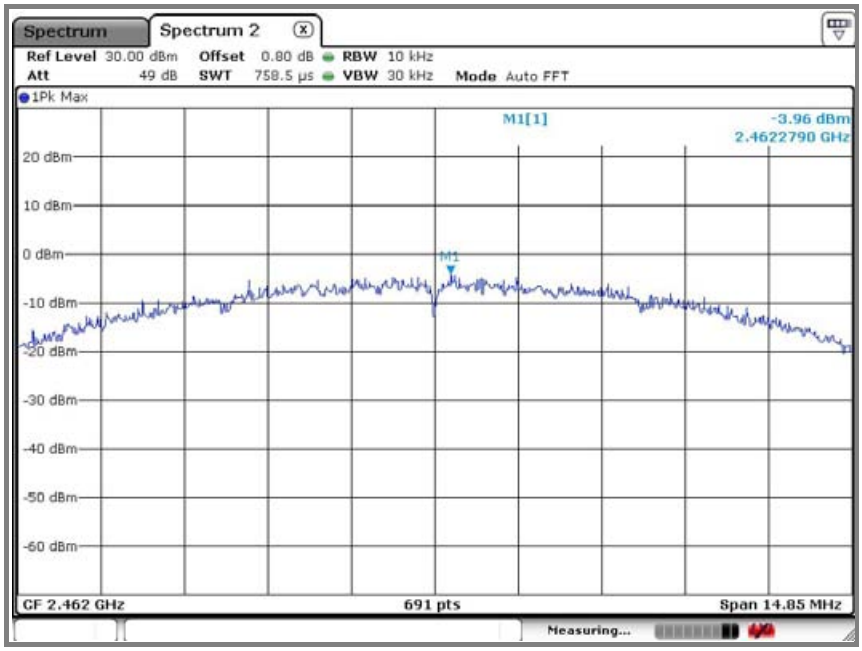

Operation mode: 802.11g mode

A. Low channel (2 412 ㎒)

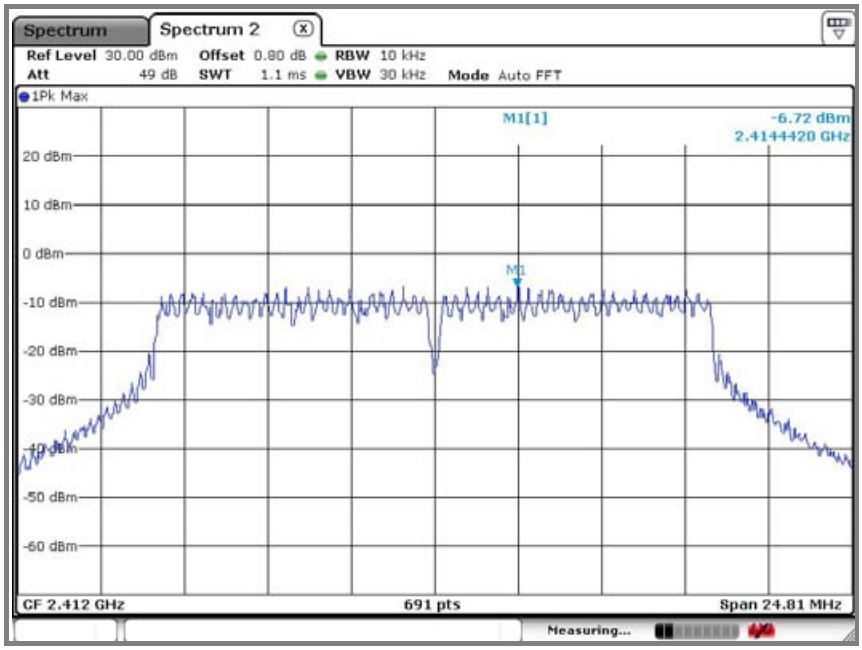

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

B. Middle channel (2 437 ㎒)

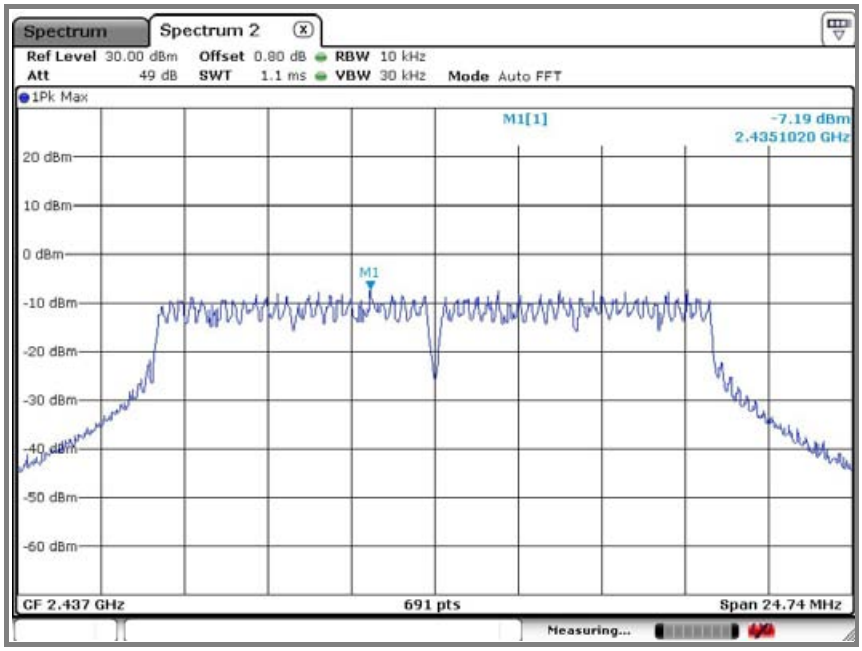

C. High channel (2 462 ㎒)

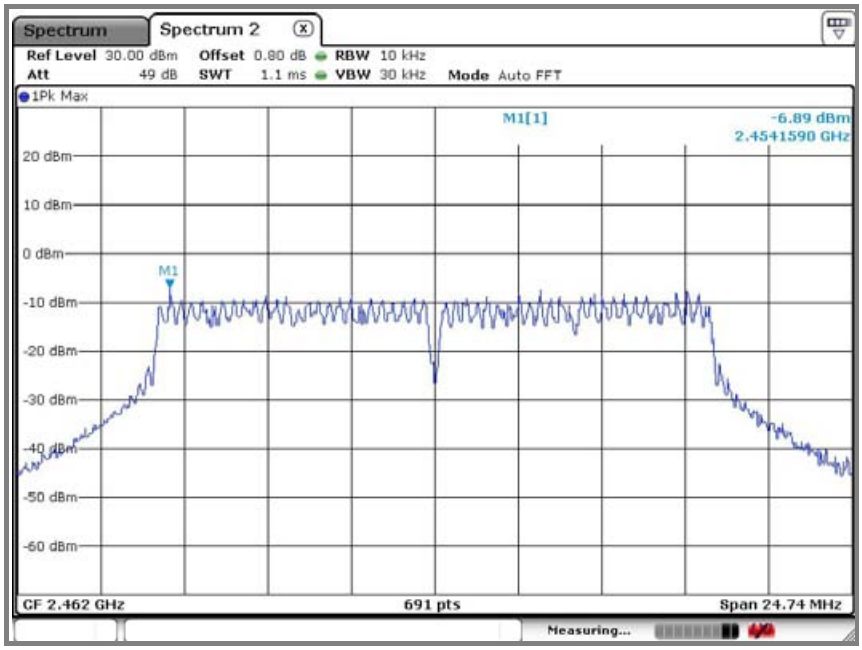

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: 802.11n_20 mode

A. Low channel (2 412 ㎒)

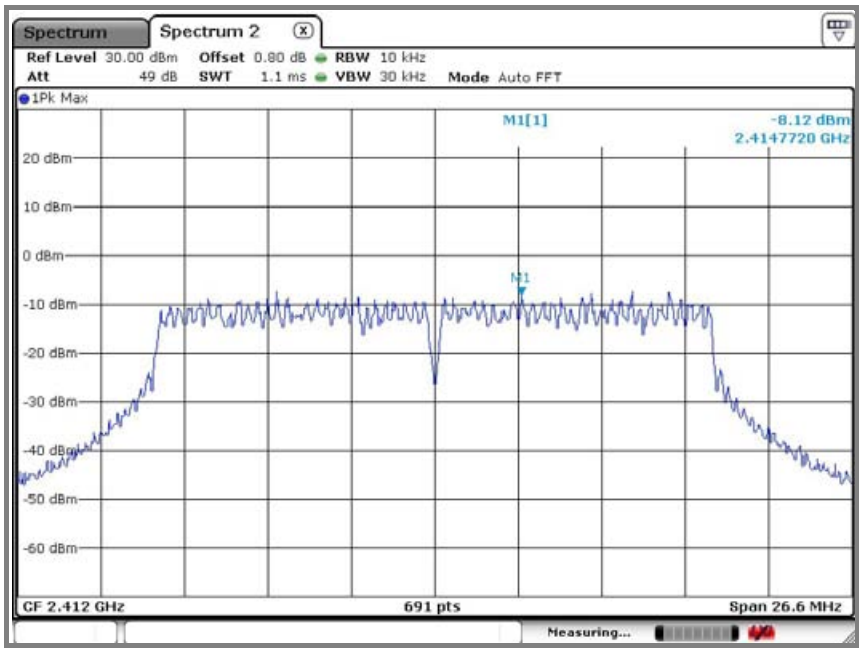

B. Middle channel (2 437 ㎒)

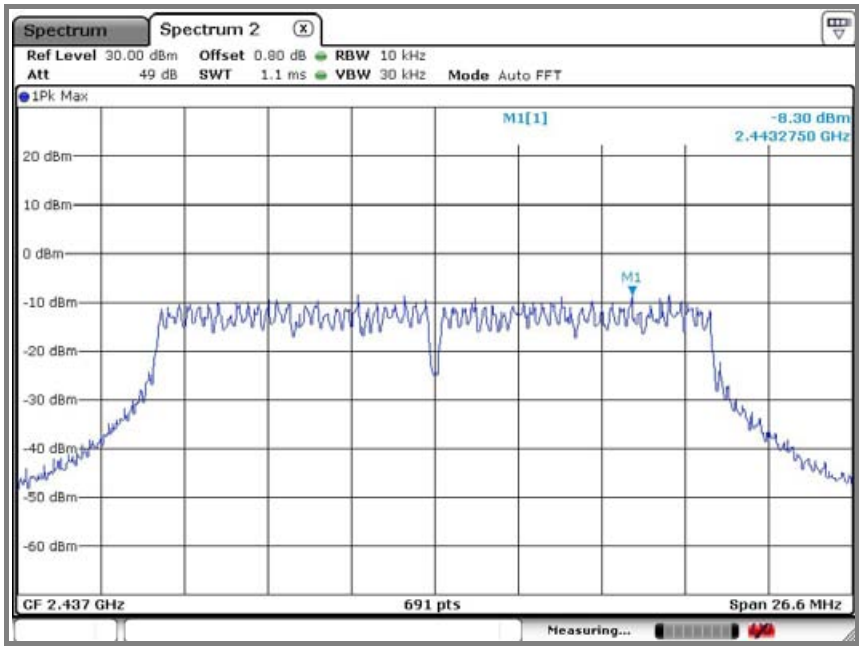

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 462 ㎒)

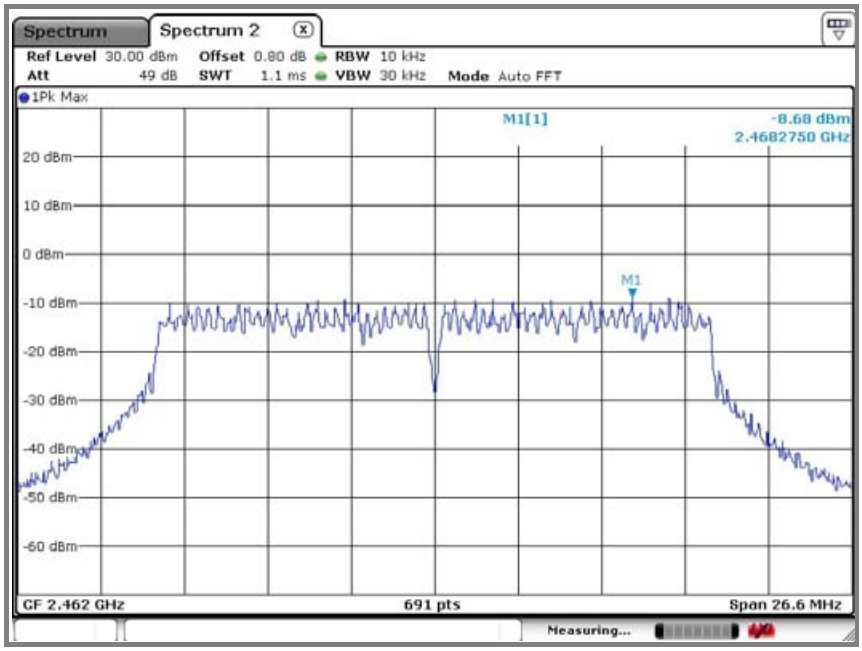

Operation mode: 802.11n_40 mode

A. Low channel (2 422 ㎒)

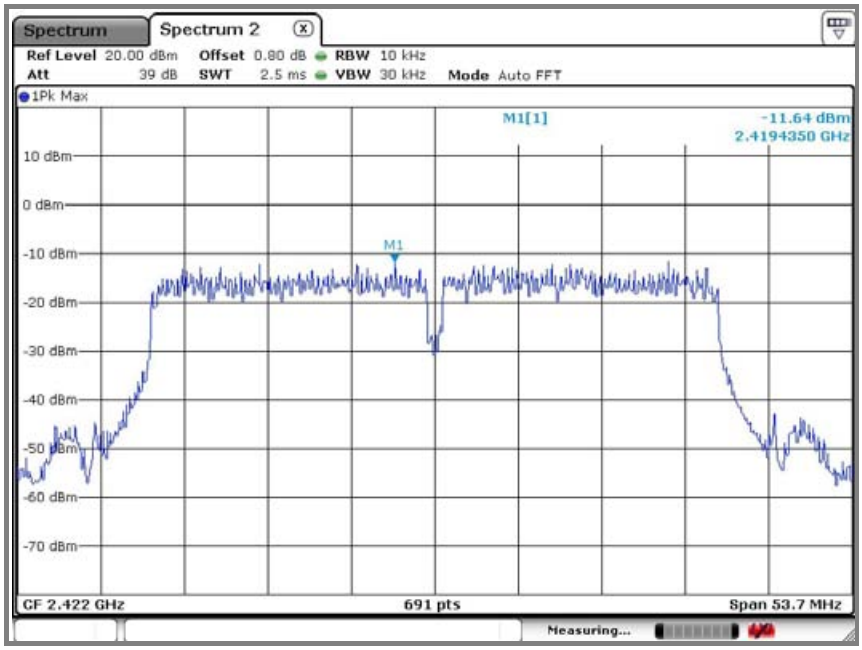

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

B. Middle channel (2 437 ㎒)

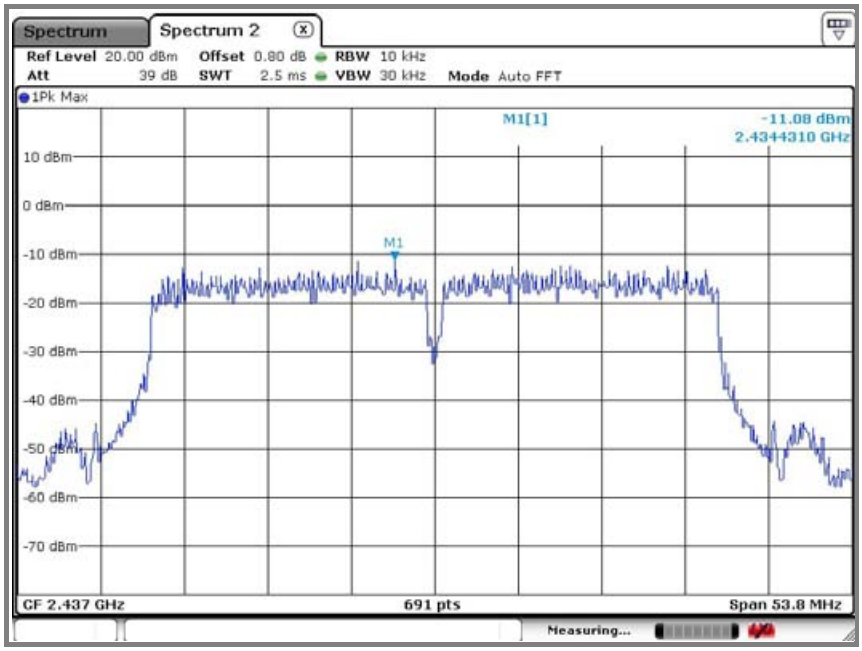

C. High channel (2 452 ㎒)

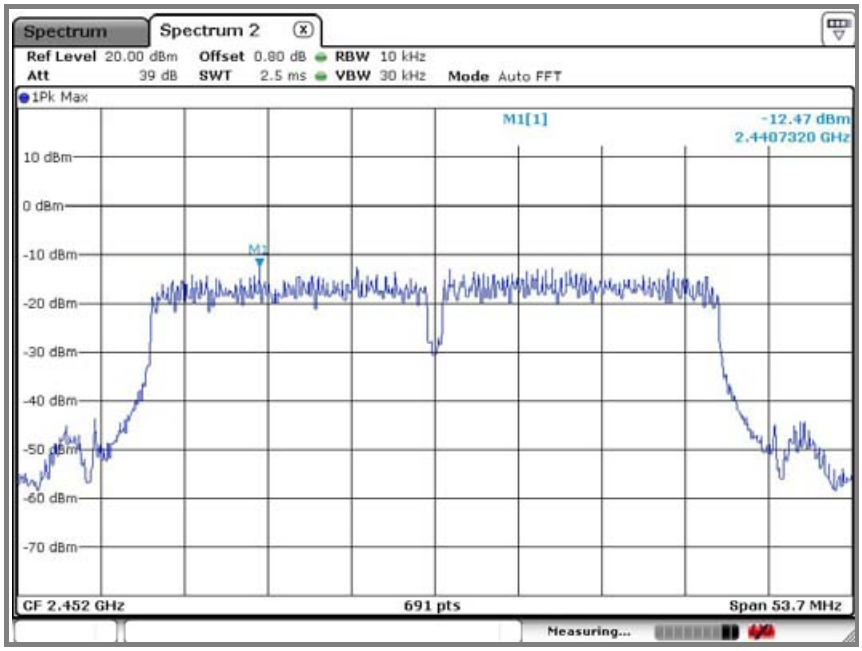

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Operation mode: Zigbee mode

A. Low channel (2 405 ㎒)

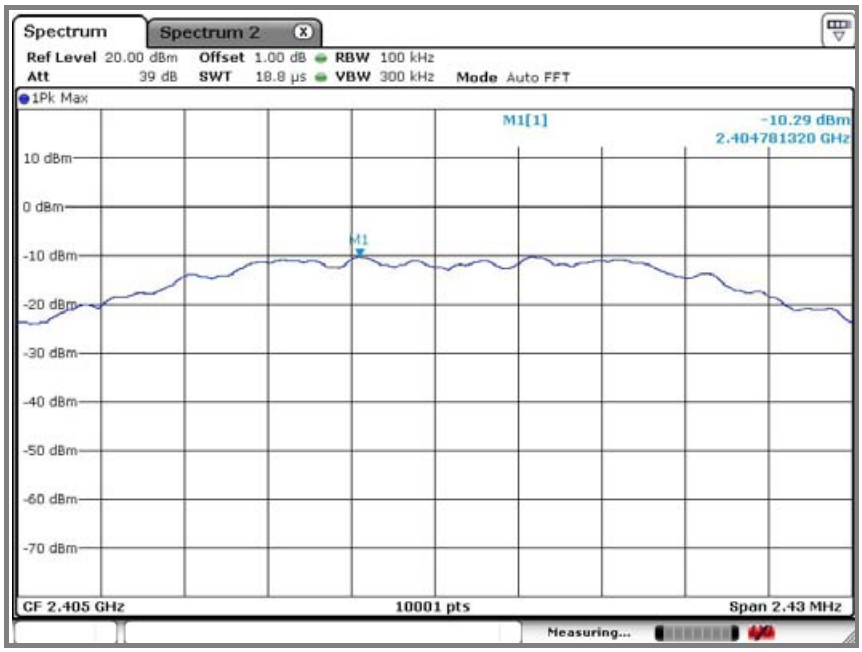

B. Middle channel (2 440 ㎒)

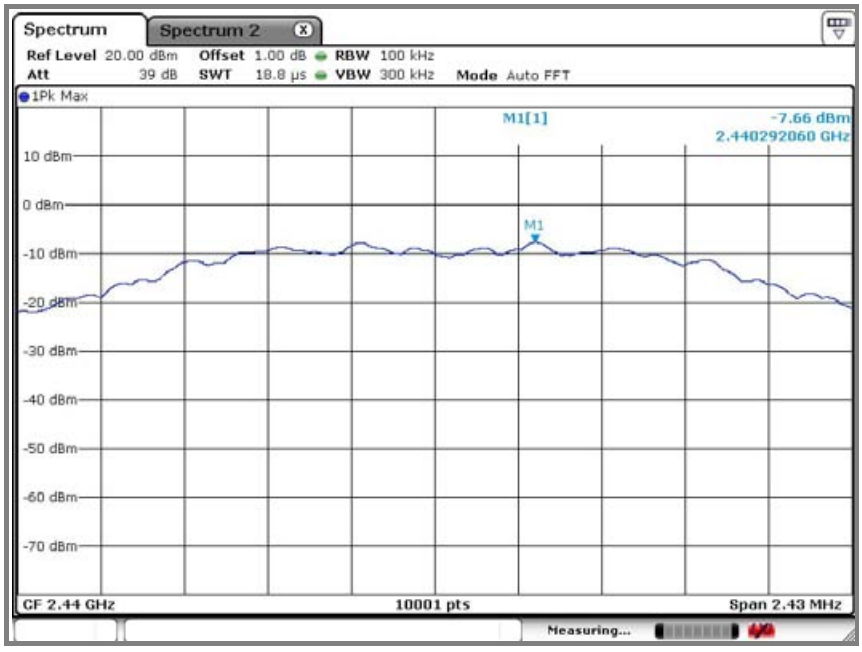

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

C. High channel (2 480 ㎒)

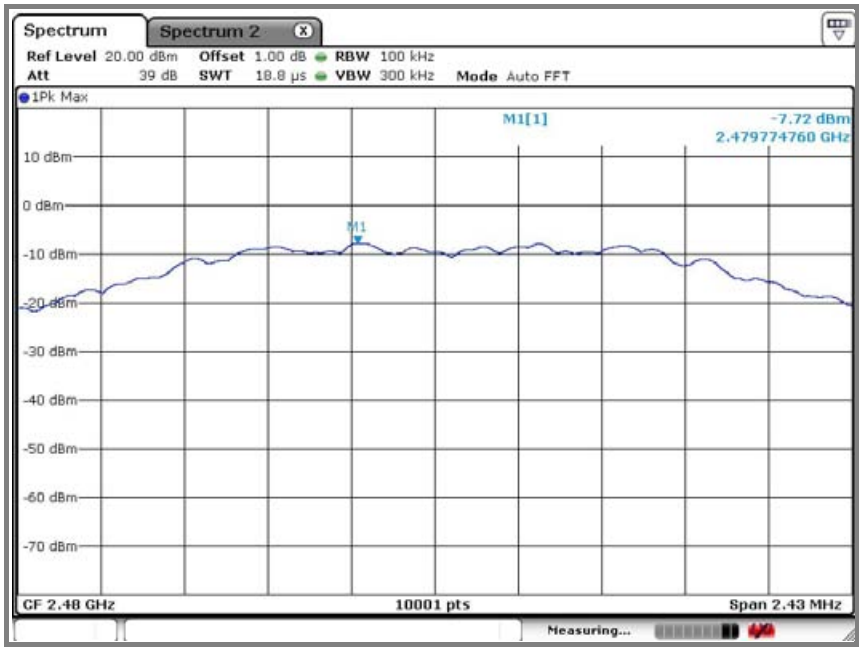

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

8. Antenna requirement

8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dBi are used.

8.2. Antenna Connected Construction

Antenna used in this product is PCB Pattern antenna (Zigbee), Chip Antenna (WLAN)
Antenna gain is 5.3 dBi. (Zigbee) / 0.6 dBi. (WLAN)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

9. RF exposure evaluation

9.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to KDB 447498 (2)(a)(i)

Limits for maximum permissible exposure (MPE)

Frequency range (㎒)	Electric field strength(V/m)	Magnetic field strength (A/m)	Power density (㎽/㎠)	Average time
(A) Limits for Occupational / Control exposures				
300 – 1 500	--	--	F/300	6
1 500 – 100 000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300 – 1 500	--	--	F/1 500	6
1 500 – 100 000	--	--	1	30

9.2. Friis transmission formula : Pd=(Pout*G)\(4*pi*R2)

Where
Pd= Power density in ㎽/㎠
Pout=output power to antenna in ㎽
G= Numeric gain of the antenna relative to isotropic antenna
Pi=3.1416
R= distance between observation point and center of the radiator in cm
Pd the limit of MPE, 1 ㎽/㎠. If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

9.3. Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data
Test Mode : Normal operation

9.4. Output power into antenna & RF exposure evaluation distance

Antenna gain: 5.3 dBi (Zigbee) / 0.64 dBi (WLAN)

Mode	Frequency (㎒)	Output Peak power to antenna (dBm)	Antenna gain (dBi)	Antenna Gain (dBi) Numeric	Power density at 20 ㎝ (㎽/㎠)	Power density Limits (㎽/㎠)
802.11b	2 412	15.13	0.64	1.16	0.007 5	1
	2 437	14.60	0.64	1.16	0.006 7	
	2 472	14.34	0.64	1.16	0.006 3	
802.11g	2 412	8.20	0.64	1.16	0.001 5	1
	2 437	7.76	0.64	1.16	0.001 4	
	2 472	6.90	0.64	1.16	0.001 1	
802.11 n_20	2 412	7.10	0.64	1.16	0.001 2	1
	2 437	6.44	0.64	1.16	0.001 0	
	2 472	5.43	0.64	1.16	0.000 8	
802.11 n_40	2 422	3.83	0.64	1.16	0.000 6	1
	2 437	3.45	0.64	1.16	0.000 5	
	2 462	2.69	0.64	1.16	0.000 4	
Zigbee	2 405	-6.56	5.30	3.39	0.000 1	1
	2 440	-4.65	5.30	3.39	0.000 2	
	2 480	-4.17	5.30	3.39	0.000 3	

※ Remark
The power density Pd (5th column) at a distance of 20 ㎝ calculated from the friis transmission formula is far below the limit of 1 ㎽/㎠ .

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

10. Test setup photo of EUT

Photo of radiated spurious emission at below 30 ㎒

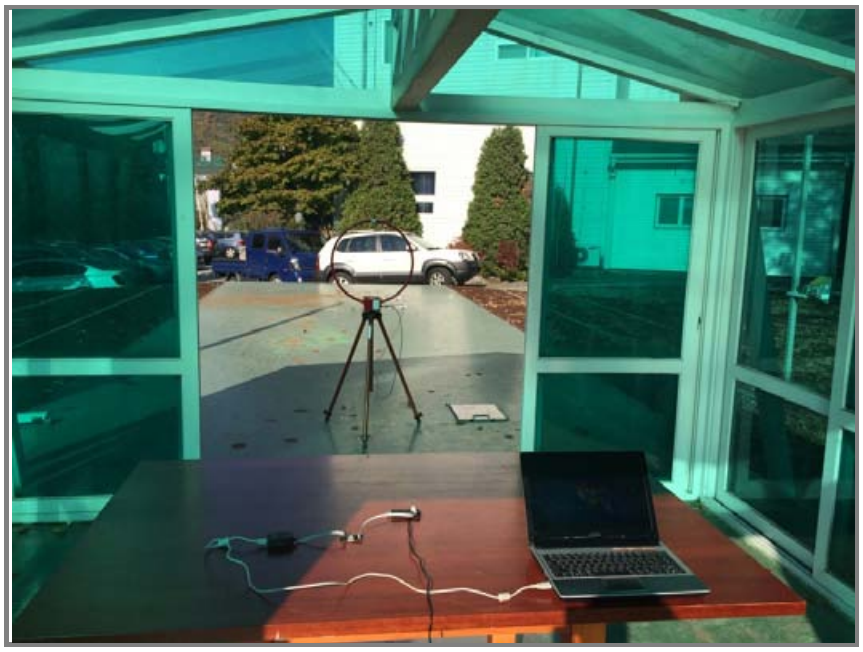

Photo of radiated spurious emission at 30 ㎒ ~ 1 000 ㎒

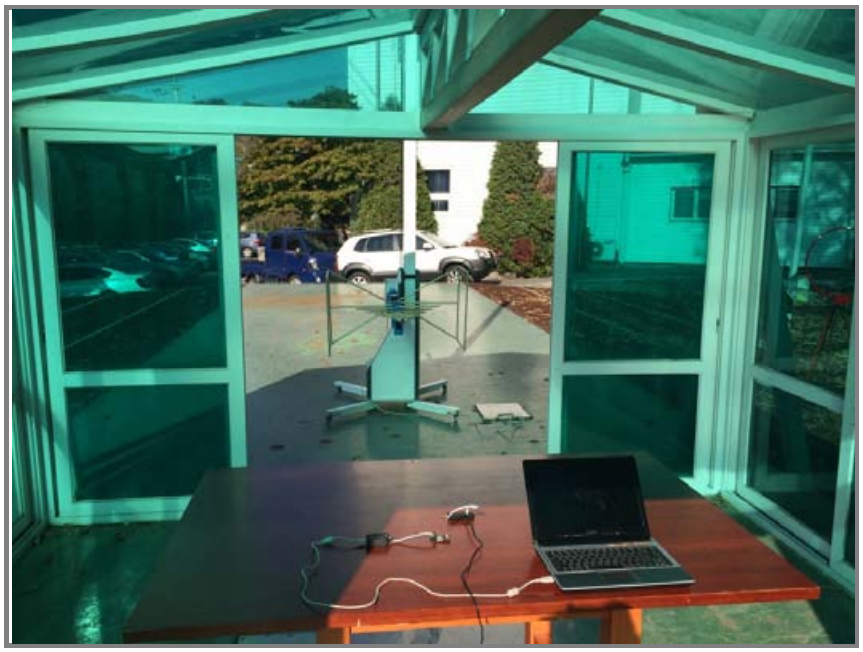

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Photo of radiated spurious emission at above 1 000 ㎒

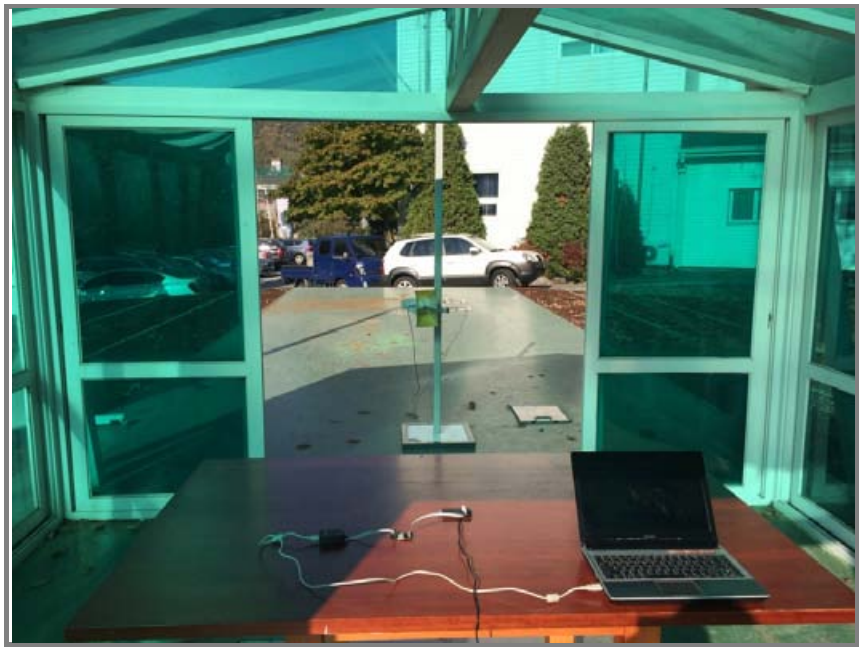

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.

Photo of Conducted emission at below 30 ㎒

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without the written approval of MOVON CORPORATION.