

Measurement Results

No.1-2063/21-01-09_log1_conducted

Test logging

This document is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:



cn=Michael Dorongovski, o=CTC
advanced GmbH, ou=DOR-210422,
email=Michael.Dorongovski@ctcadv
anced.com, c=DE
2023.03.09 14:00:30 +01'00'

David Lang
Lang Manager
Radio Communications

Table of Content

EUT Information	4
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode	5
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode	7
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode	9
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode	13
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode	16
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode	18
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode	20
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode	22
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode	26
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode	29
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode	31
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode	33
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode	35
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode	39
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode	42
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode	44
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode	46
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode	48
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode	52
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode	55
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode	57
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode	59
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode	61
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode	65
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode	68
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode	70
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode	72
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode	74
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode	78
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode	81
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode	83
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode	85
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode	87
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode	91
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT20-mode	94
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode	96
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode	98
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode	100
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode	104
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT20-mode	107
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode	109
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode	111

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode	113
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode	117
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT20-mode	120
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT40-mode	122
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode	124
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode	126
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode	130
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode	133
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT40-mode	135
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode	137
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode	139
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode	143
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode	146
FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT40-mode	148
FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode	150
FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode	152
FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode	156
FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode	159

EUT Information

EUT DEFINITION	
Manufacturer	Roche
Type	CC Pro2
Serial Number	21072707
Setup Number	1.0
Version SW	04.07.00-Dev1
Version FW	NI
Version HW	HBM4.50
Comment 1	
Comment 2	
Temperature [°C] Min	-20
Temperature [°C] Nom	20
Temperature [°C] Max	55
Voltage [V] Min	4.2
Voltage [V] Nom	7.8
Voltage [V] Max	12.0

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 13:47:38
Ambit Temp [°C] Humidity [rel%]	25.3 40
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.60	dBm	INFO
Ref. Frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.60 16.15 10
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	10044	kHz	PASS

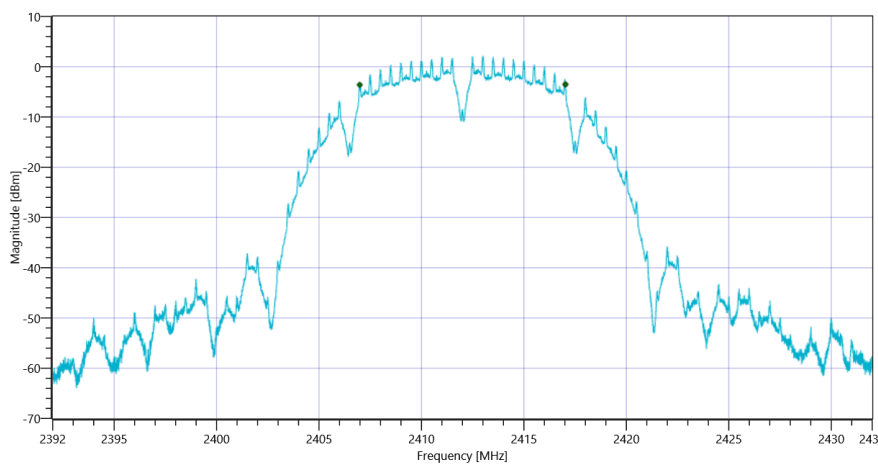

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

Test References	
TC Start	17.08.2021 13:48:17
Ambit Temp [°C] Humidity [rel%]	25.3 40
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.58	dBm	INFO
Ref. Frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.58 16.15 10
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-12.76	dBm/3KHz	PASS

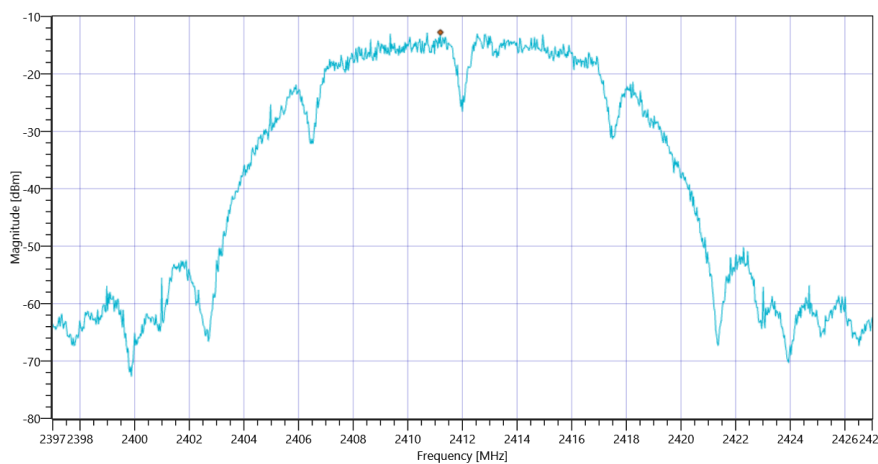

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 13:49:03
Ambit Temp [°C] Humidity [rel%]	25.3 40
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.49	dBm	INFO
Ref. Frequency	---	---	2413.300	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.49 16.15 10
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	13250.675	kHz	INFO
T1 99%	2400.000000	---	2405.4047	MHz	PASS
T2 99%	---	2483.500000	2418.6553	MHz	PASS

Plot: Bandwidth only

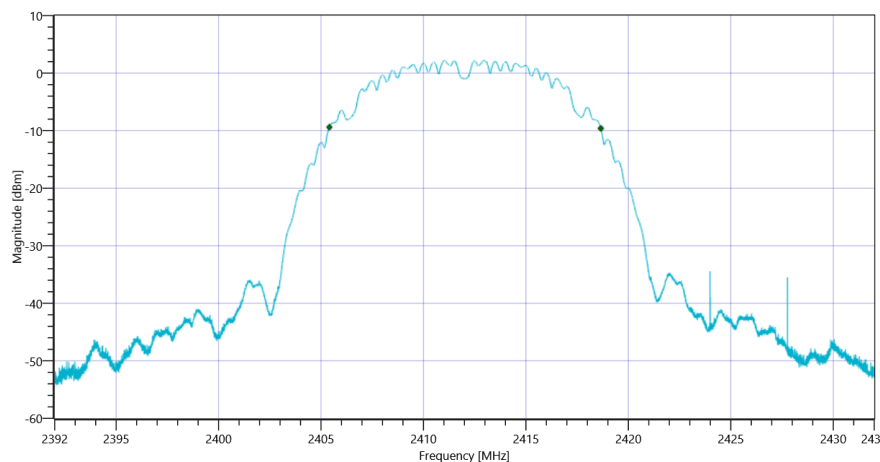

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode 99PCT


Plot: Bandwidth within Band

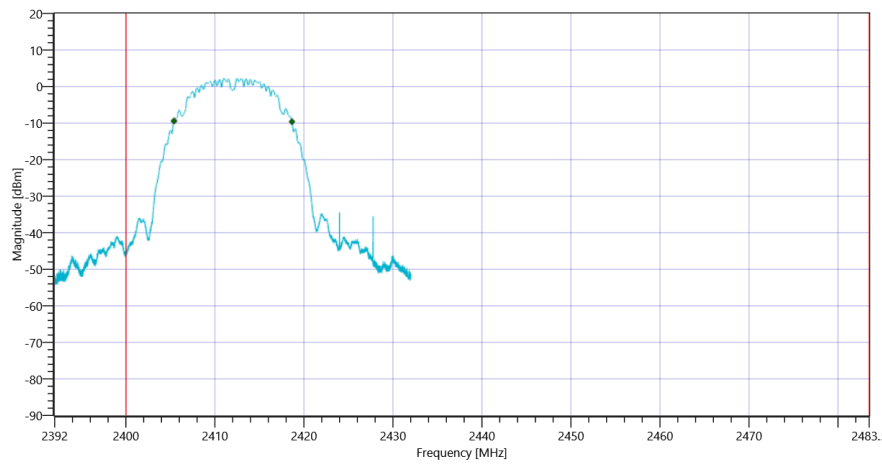

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15440	kHz	INFO
T1 20dB	2400.000000	---	2404.2880	MHz	PASS
T2 20dB	---	2483.500000	2419.7280	MHz	PASS

Plot: Bandwidth only

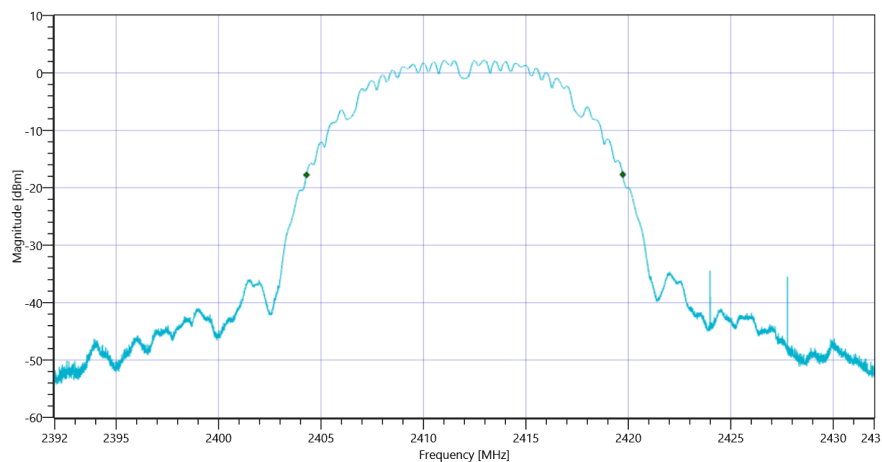

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode 20dB

Plot: Bandwidth within Band

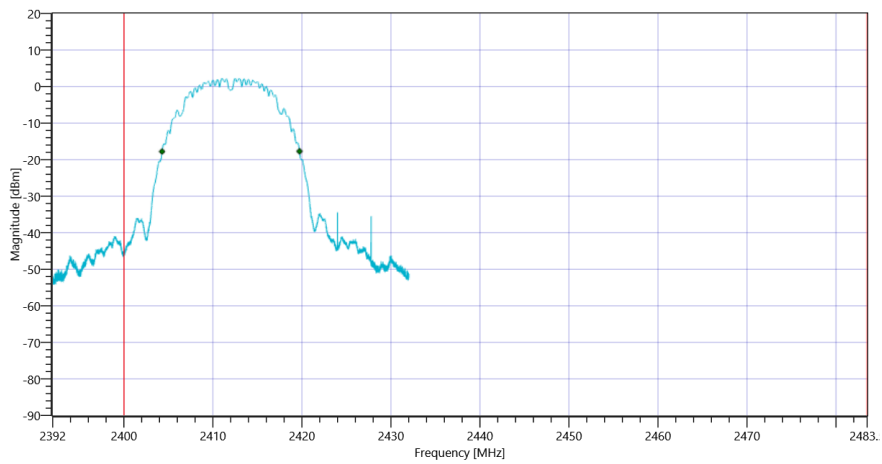

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 13:50:02
Ambit Temp [°C] Humidity [rel%]	25.3 40
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.45	dBm	INFO
Ref. Frequency	---	---	2413.300	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.45 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2413.50 MHz	---	---	1.18	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 22844 MHz	0	---	16.46	dB	INFO

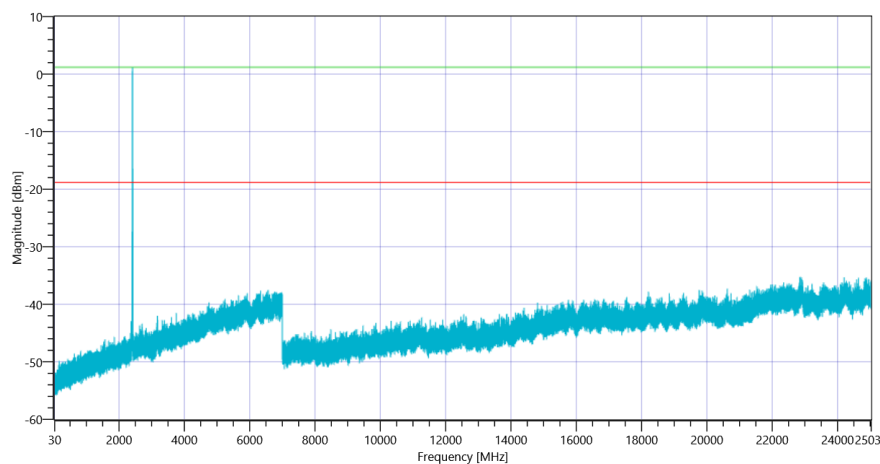

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2412

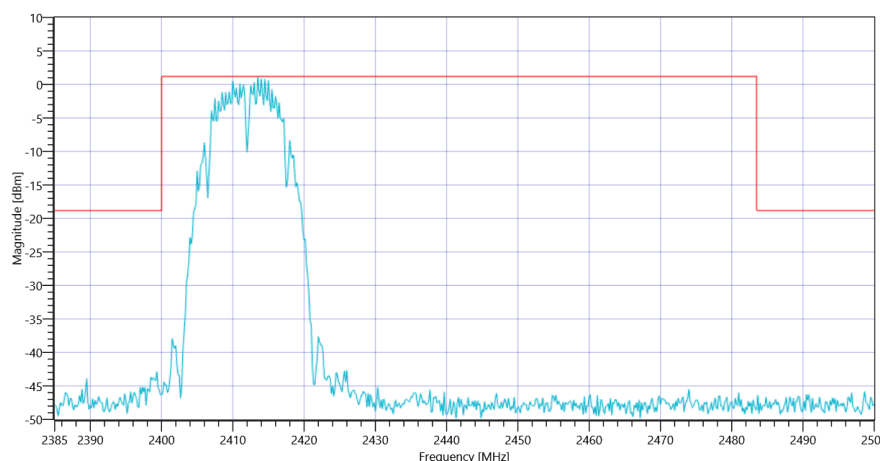

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2412

General verdict

PASS

FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode

Test References	
TC Start	17.08.2021 13:56:58
Ambit Temp [°C] Humidity [rel%]	25.4 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06	

Test at TX 2412 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	14.15	dBm	PASS
General verdict			PASS		

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 13:58:59
Ambit Temp [°C] Humidity [rel%]	25.4 40
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.24	dBm	INFO
Ref. Frequency	---	---	2435.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.24 16.02 10
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	10060	kHz	PASS

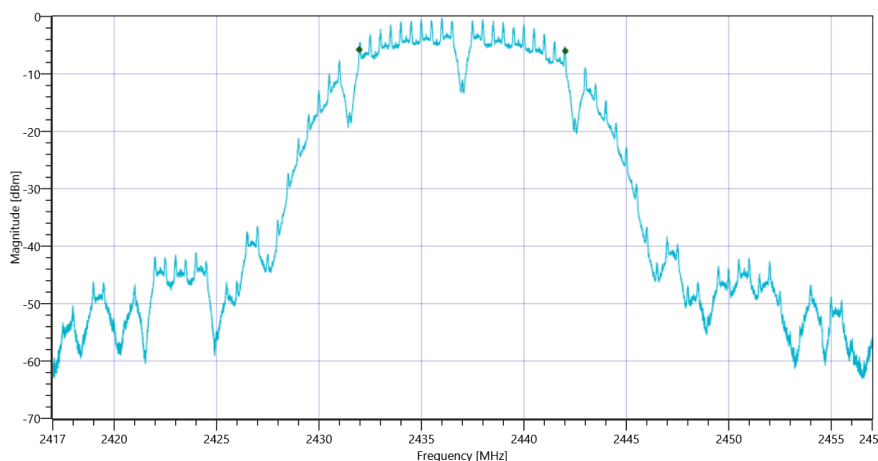

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

Test References	
TC Start	17.08.2021 13:59:37
Ambit Temp [°C] Humidity [rel%]	25.4 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.19	dBm	INFO
Ref. Frequency	---	---	2435.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.19 16.02 10
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-13.95	dBm/3KHz	PASS

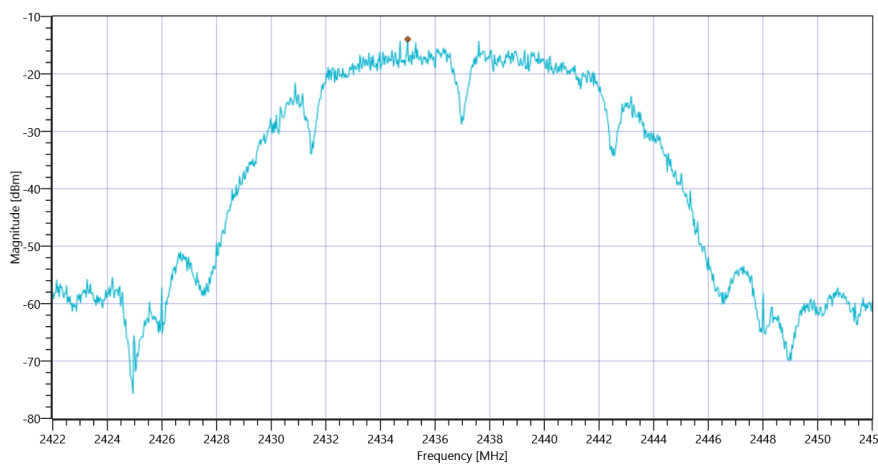

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 14:00:23
Ambit Temp [°C] Humidity [rel%]	25.5 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.15	dBm	INFO
Ref. Frequency	---	---	2435.500	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.15 16.02 10
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	13450.655	kHz	INFO
T1 99%	2400.000000	---	2430.1527	MHz	PASS
T2 99%	---	2483.500000	2443.6033	MHz	PASS

Plot: Bandwidth only

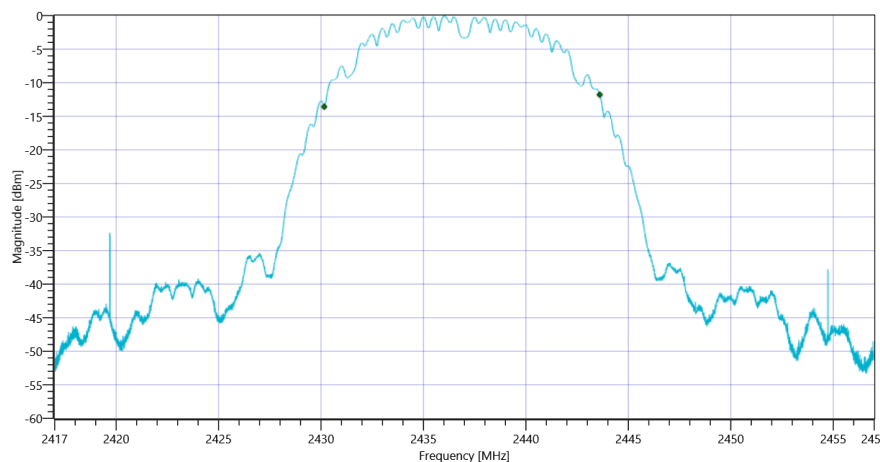

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode 99PCT


Plot: Bandwidth within Band

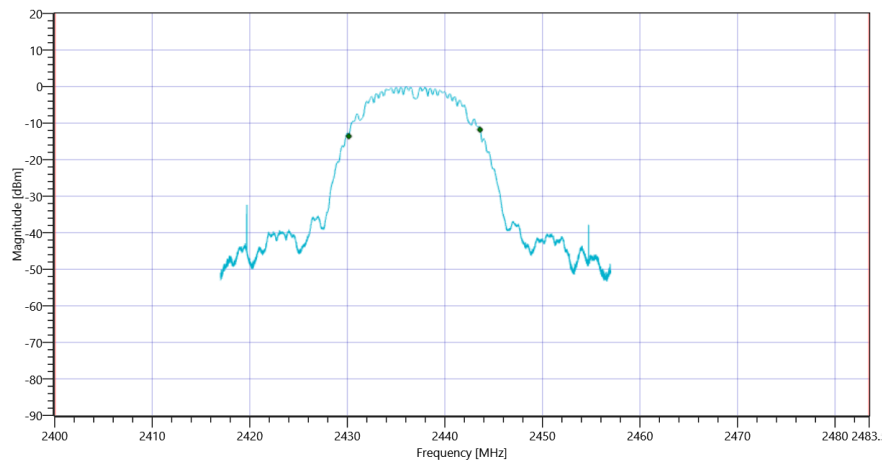

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15520	kHz	INFO
T1 20dB	2400.000000	---	2429.1920	MHz	PASS
T2 20dB	---	2483.500000	2444.7120	MHz	PASS

Plot: Bandwidth only

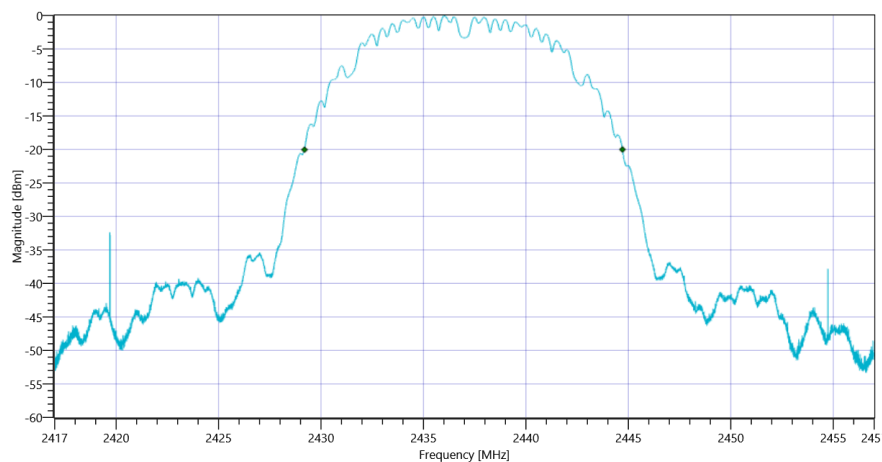

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode 20dB

Plot: Bandwidth within Band

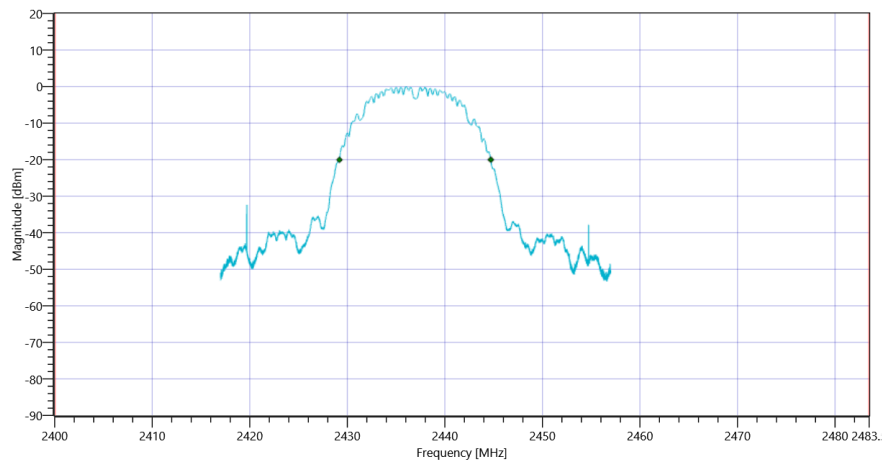

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode

Test References	
TC Start	17.08.2021 14:01:21
Ambit Temp [°C] Humidity [rel%]	25.4 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.13	dBm	INFO
Ref. Frequency	---	---	2435.600	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.13 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2436.50 MHz	---	---	-0.64	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24233.833 MHz	0	---	17.63	dB	INFO

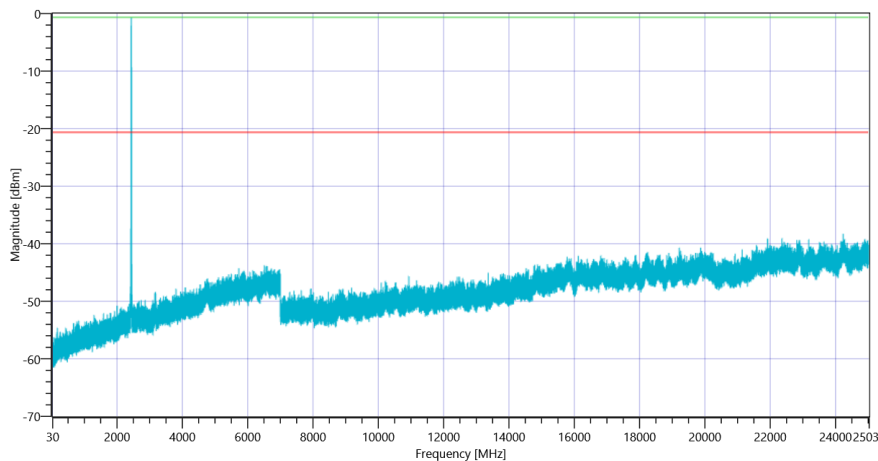

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2437

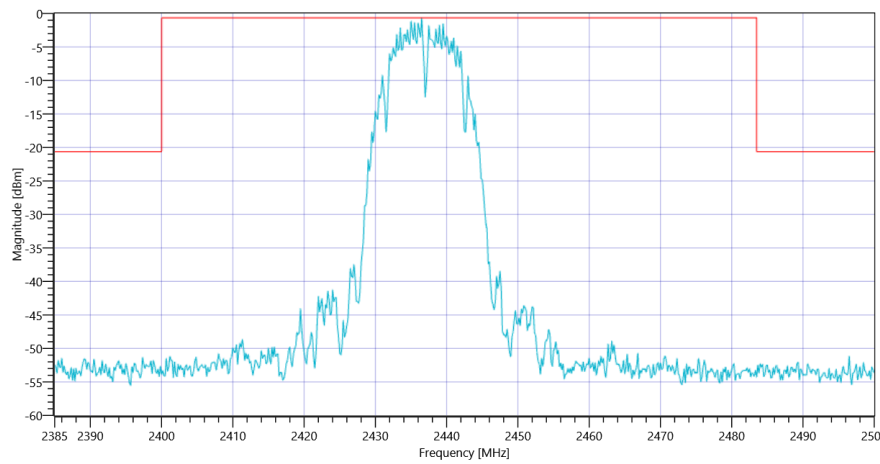

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2437

General verdict

PASS

FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode

Test References	
TC Start	17.08.2021 14:08:16
Ambit Temp [°C] Humidity [rel%]	25.5 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06	

Test at TX 2437 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.28	dBm	PASS

General verdict

PASS

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 14:09:22
Ambit Temp [°C] Humidity [rel%]	25.5 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.83	dBm	INFO
Ref. Frequency	---	---	2463.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.83 15.92 10
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	10068	kHz	PASS

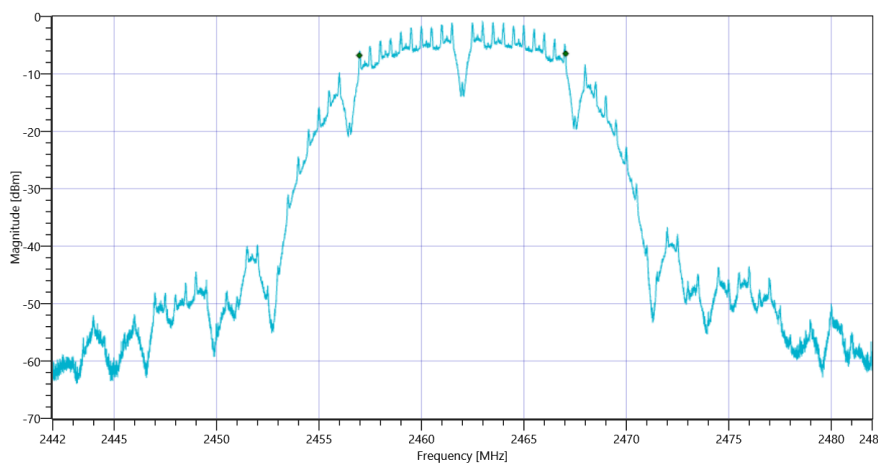

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 14:10:01
Ambit Temp [°C] Humidity [rel%]	25.5 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.85	dBm	INFO
Ref. Frequency	---	---	2463.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.85 15.92 10
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-14.8	dBm/3KHz	PASS

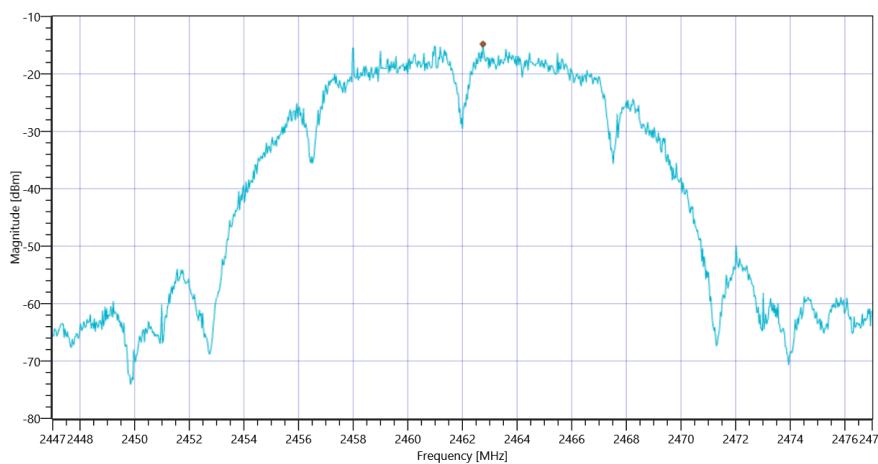

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 14:10:47
Ambit Temp [°C] Humidity [rel%]	25.5 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.94	dBm	INFO
Ref. Frequency	---	---	2463.400	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.94 15.92 10
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	13302.670	kHz	INFO
T1 99%	2400.000000	---	2455.4487	MHz	PASS
T2 99%	---	2483.500000	2468.7513	MHz	PASS

Plot: Bandwidth only

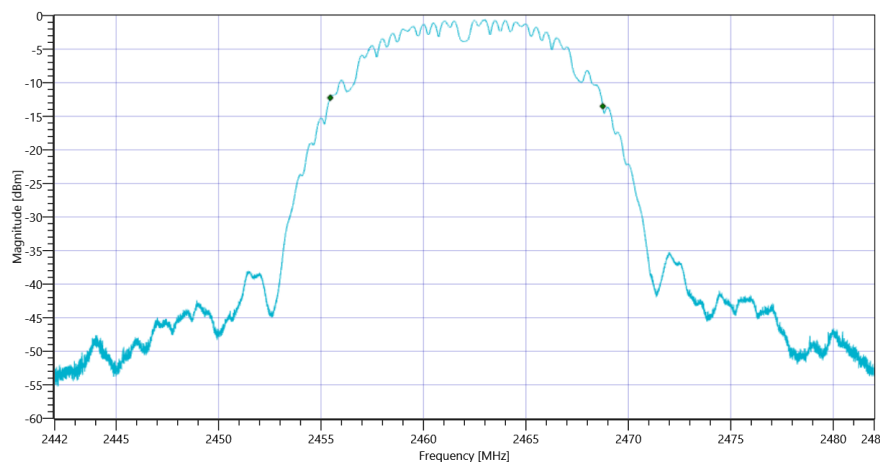

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode 99PCT


Plot: Bandwidth within Band

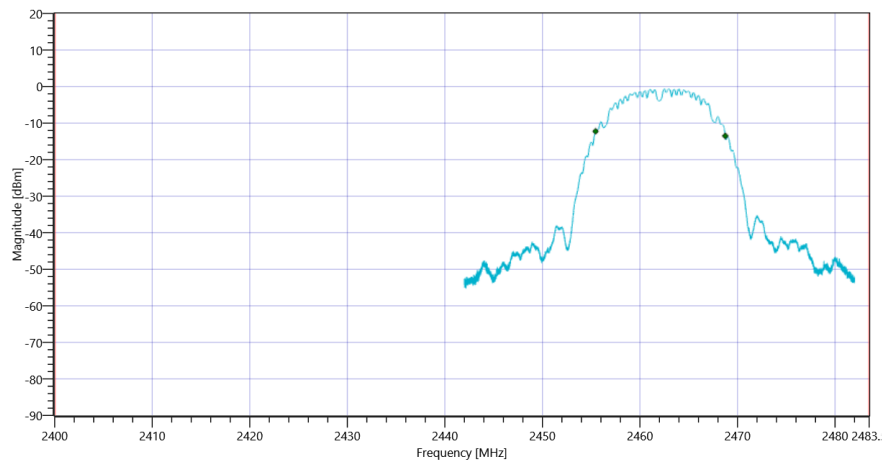

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15444	kHz	INFO
T1 20dB	2400.000000	---	2454.3160	MHz	PASS
T2 20dB	---	2483.500000	2469.7600	MHz	PASS

Plot: Bandwidth only

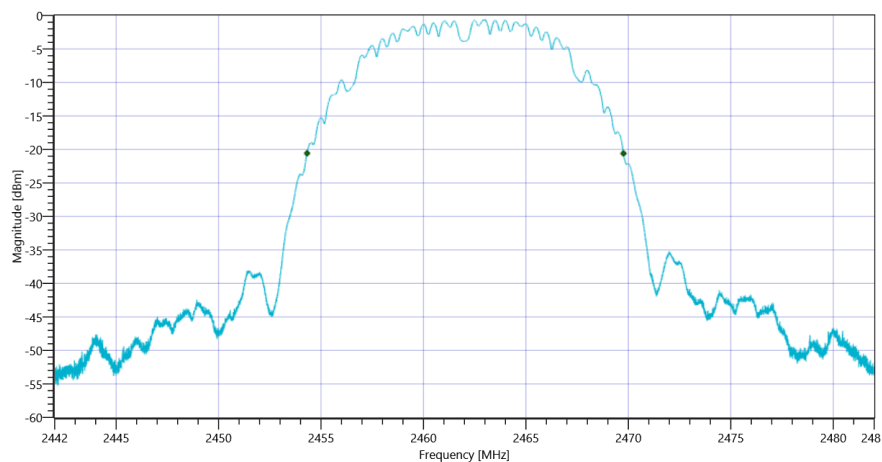

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode 20dB

Plot: Bandwidth within Band

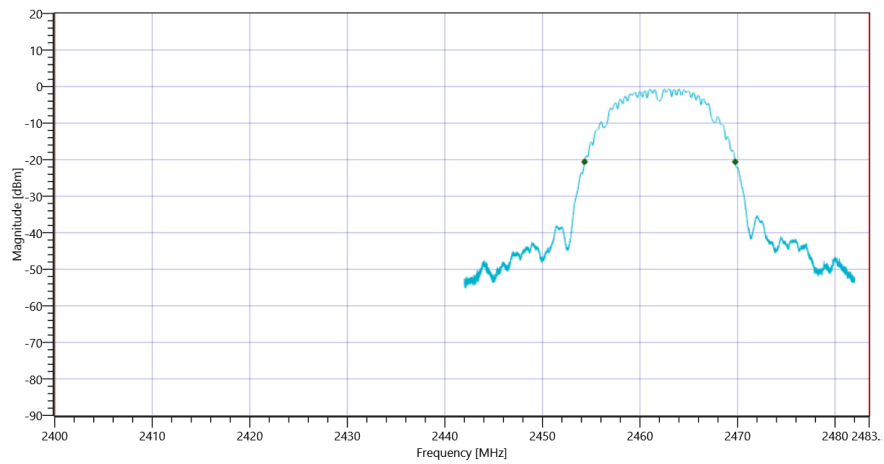

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode

Test References	
TC Start	17.08.2021 14:11:45
Ambit Temp [°C] Humidity [rel%]	25.5 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.81	dBm	INFO
Ref. Frequency	---	---	2463.400	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.81 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2465.00 MHz	---	---	-1.98	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-142.16	dB	INFO

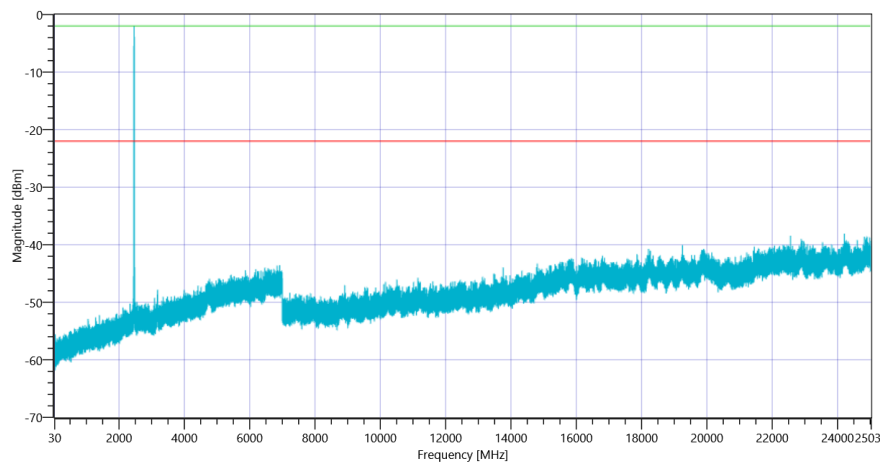

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2462

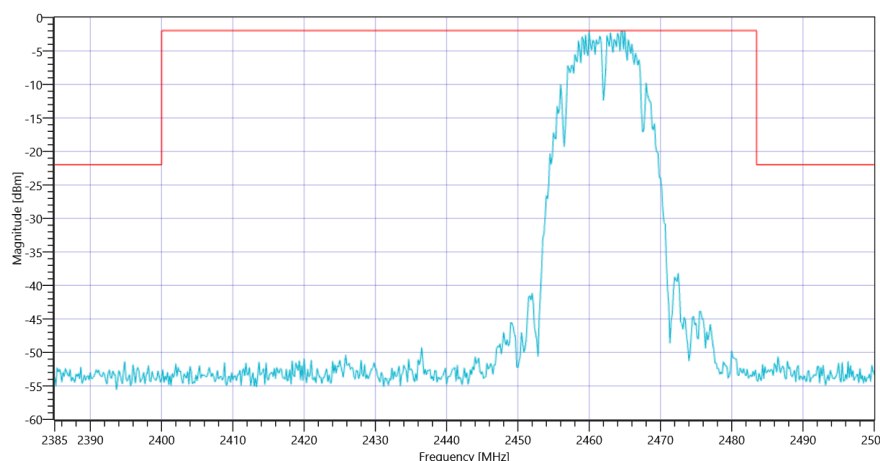

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2462

General verdict

PASS

FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode

Test References

TC Start	17.08.2021 14:18:40
Ambit Temp [°C] Humidity [rel%]	25.5 39
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2462 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.07	dBm	PASS

General verdict

PASS

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:10:38
Ambit Temp [°C] Humidity [rel%]	25.8 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.26	dBm	INFO
Ref. Frequency	---	---	2414.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.26 16.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	15616	kHz	PASS

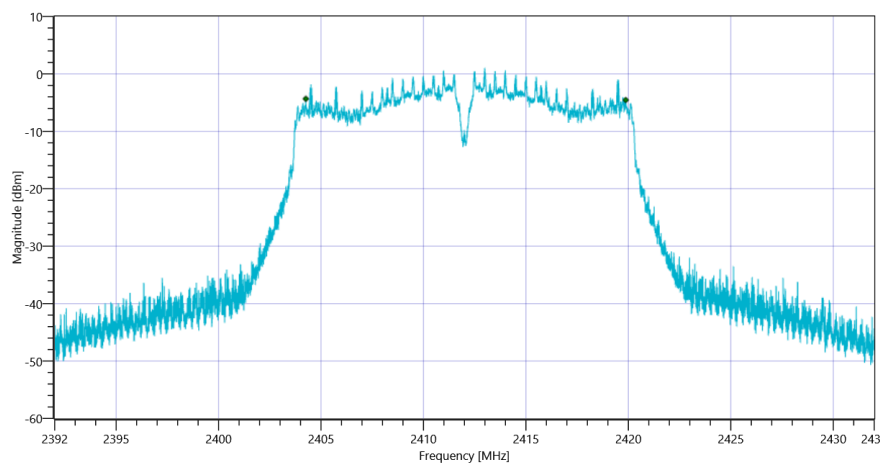

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:11:17
Ambit Temp [°C] Humidity [rel%]	25.8 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.97	dBm	INFO
Ref. Frequency	---	---	2414.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.97 16.15 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-14.08	dBm/3KHz	PASS

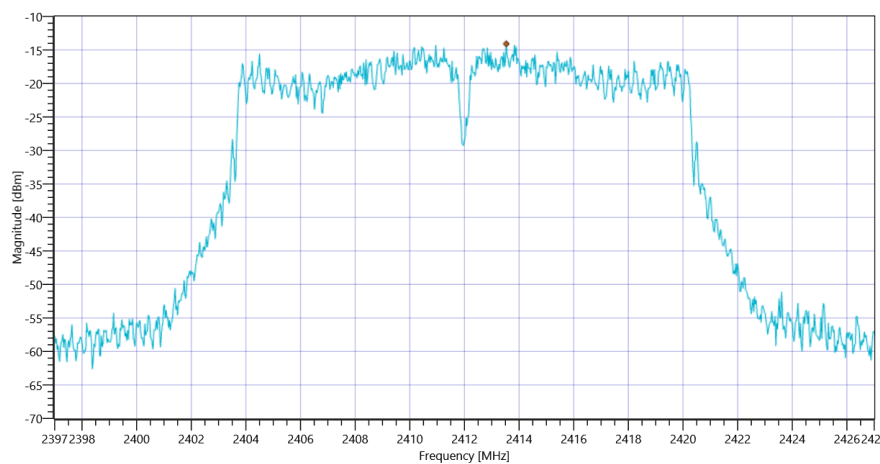

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

General verdict

PASS

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

Test References	
TC Start	17.08.2021 15:12:03
Ambit Temp [°C] Humidity [rel%]	25.8 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.91	dBm	INFO
Ref. Frequency	---	---	2418.990	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.91 16.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17166.283	kHz	INFO
T1 99%	2400.000000	---	2403.4289	MHz	PASS
T2 99%	---	2483.500000	2420.5951	MHz	PASS

Plot: Bandwidth only

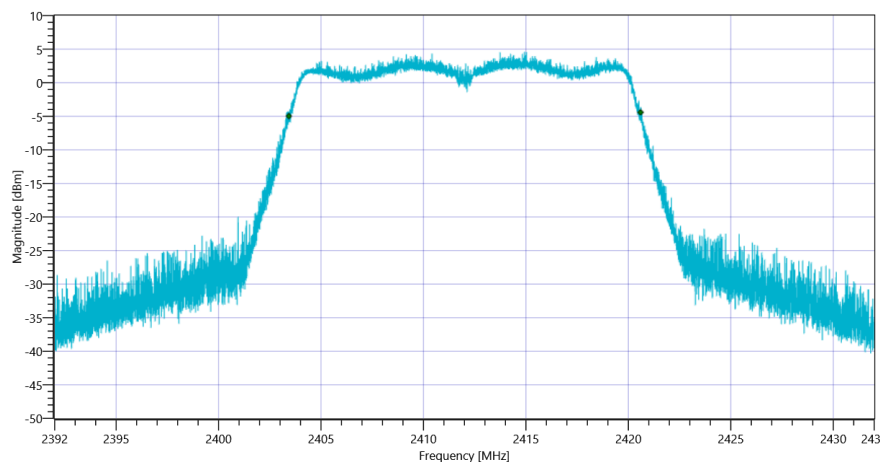

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 99PCT


Plot: Bandwidth within Band

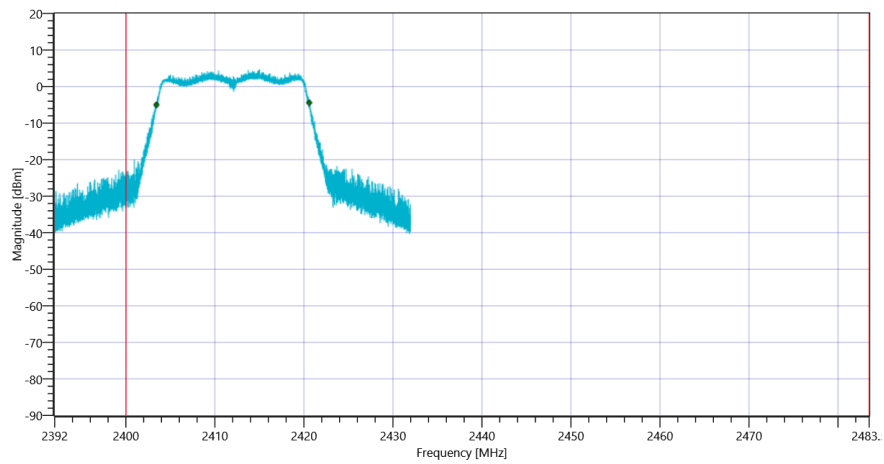

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19416	kHz	INFO
T1 20dB	2400.000000	---	2402.3480	MHz	PASS
T2 20dB	---	2483.500000	2421.7640	MHz	PASS

Plot: Bandwidth only

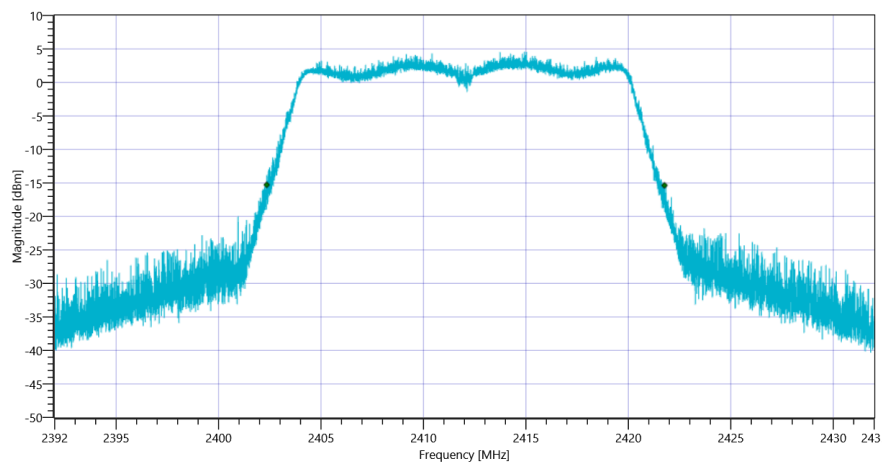

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 20dB

Plot: Bandwidth within Band

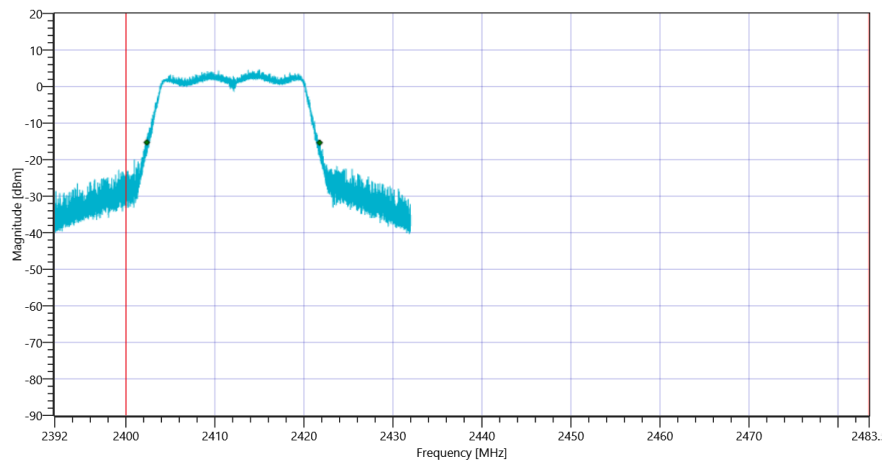

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode

Test References	
TC Start	17.08.2021 15:13:02
Ambit Temp [°C] Humidity [rel%]	25.8 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.31	dBm	INFO
Ref. Frequency	---	---	2409.400	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.31 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2414.50 MHz	---	---	-1.00	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 22898.667 MHz	0	---	13.63	dB	INFO

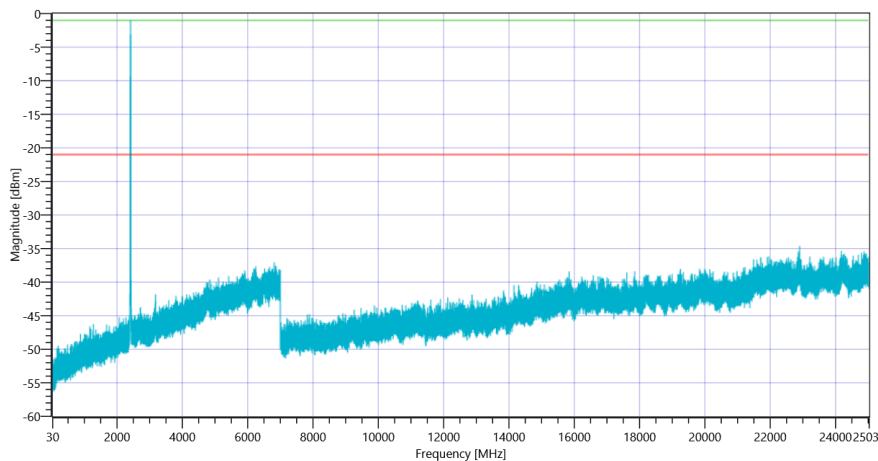

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2412

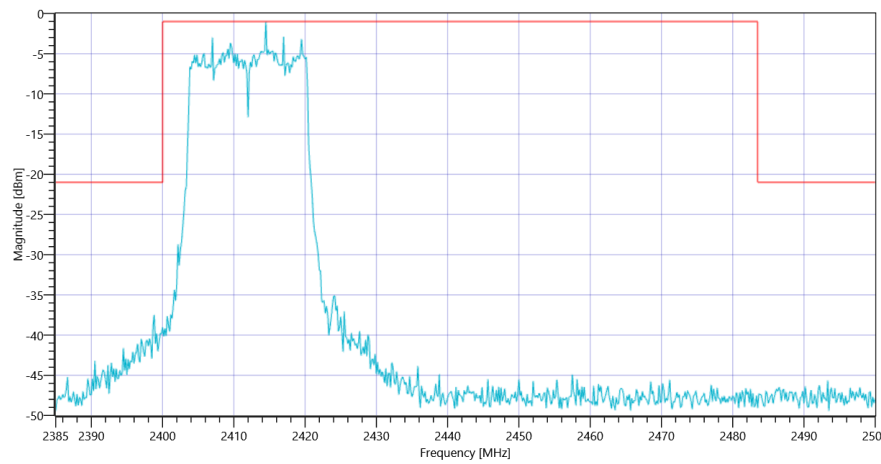

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2412

General verdict

PASS

FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:19:56
Ambit Temp [°C] Humidity [rel%]	25.8 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2412 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	22.8	dBm	PASS
General verdict			PASS		

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:21:40
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.71	dBm	INFO
Ref. Frequency	---	---	2429.710	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.71 16.02 10
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16060	kHz	PASS

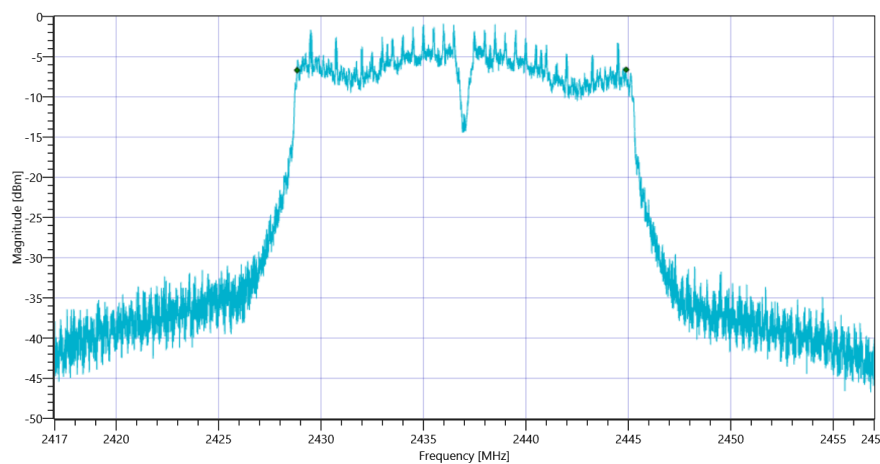

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:22:18
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.93	dBm	INFO
Ref. Frequency	---	---	2430.310	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.93 16.02 10
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-14.81	dBm/3KHz	PASS

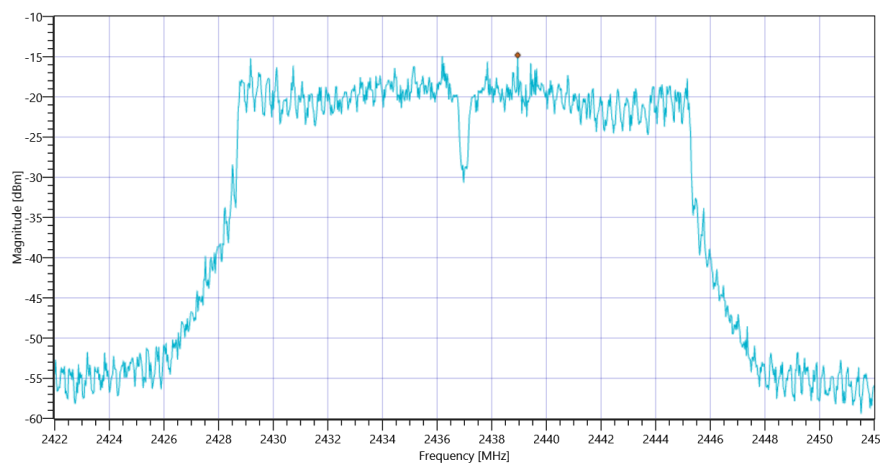

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

General verdict

PASS

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:23:04
Ambit Temp [°C] Humidity [rel%]	25.8 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.60	dBm	INFO
Ref. Frequency	---	---	2429.710	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.60 16.02 10
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17426.257	kHz	INFO
T1 99%	2400.000000	---	2428.1729	MHz	PASS
T2 99%	---	2483.500000	2445.5991	MHz	PASS

Plot: Bandwidth only

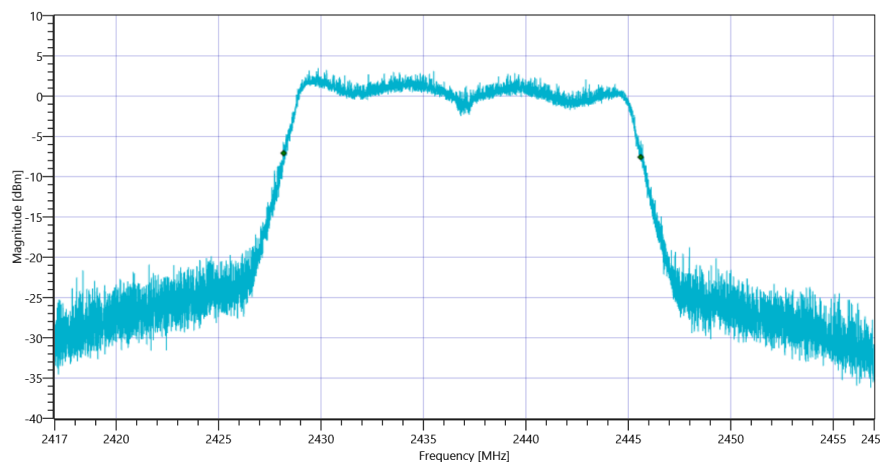

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 99PCT


Plot: Bandwidth within Band

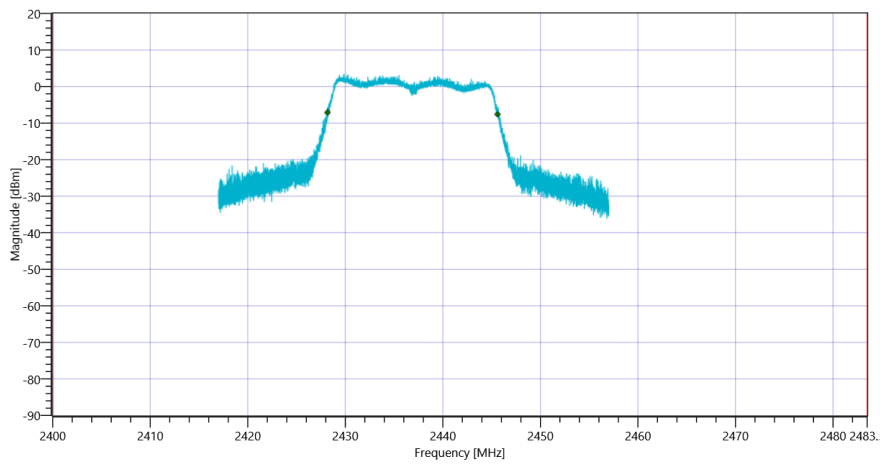

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19600	kHz	INFO
T1 20dB	2400.000000	---	2427.0560	MHz	PASS
T2 20dB	---	2483.500000	2446.6560	MHz	PASS

Plot: Bandwidth only

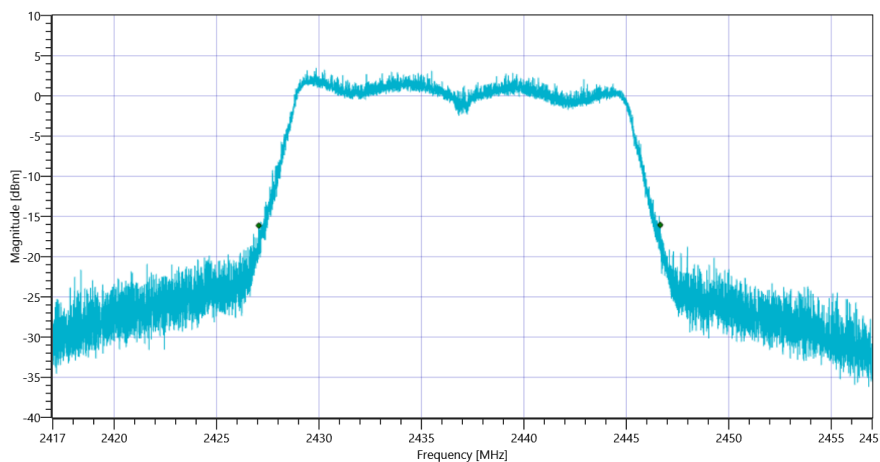

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 20dB

Plot: Bandwidth within Band

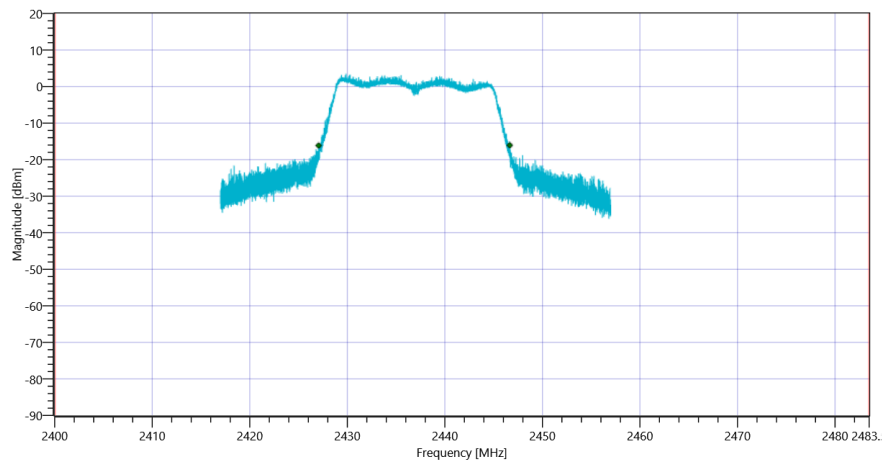

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode

Test References	
TC Start	17.08.2021 15:24:03
Ambit Temp [°C] Humidity [rel%]	25.8 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.70	dBm	INFO
Ref. Frequency	---	---	2429.710	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.70 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2438.50 MHz	---	---	-2.42	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24892.167 MHz	0	---	12.17	dB	INFO

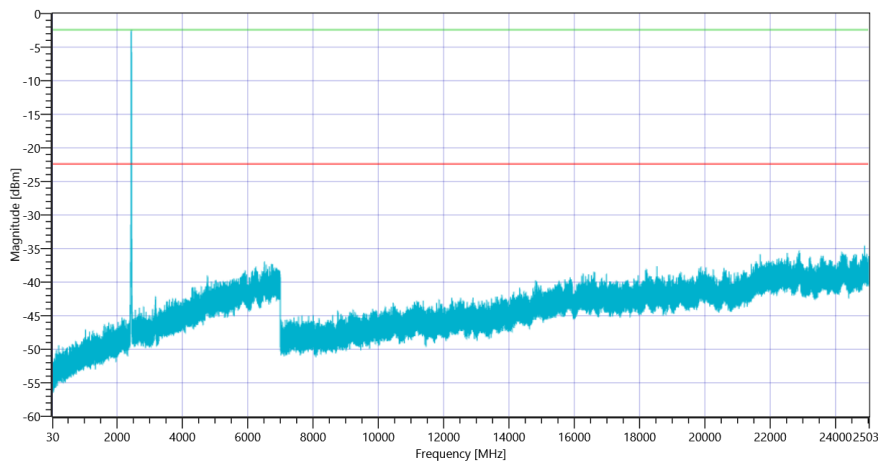

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2437

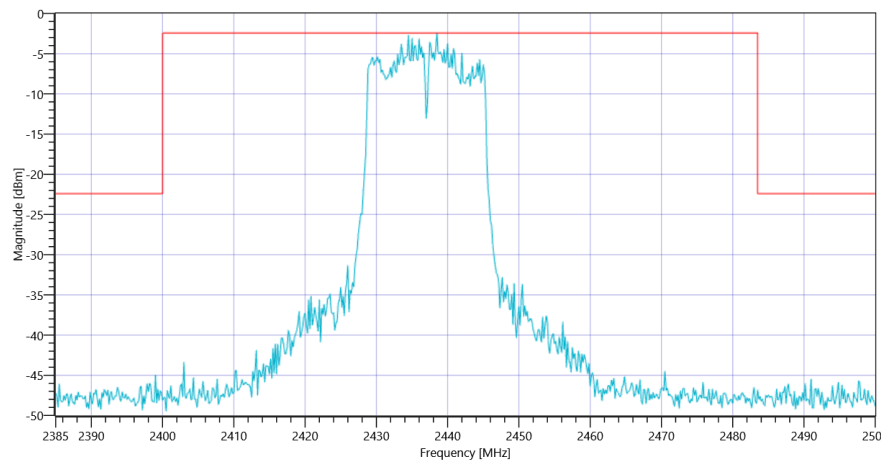

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2437

General verdict

PASS

FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:30:58
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2437 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	22.13	dBm	PASS

General verdict

PASS

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:33:56
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.49	dBm	INFO
Ref. Frequency	---	---	2469.290	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.49 15.92 10
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	15924	kHz	PASS

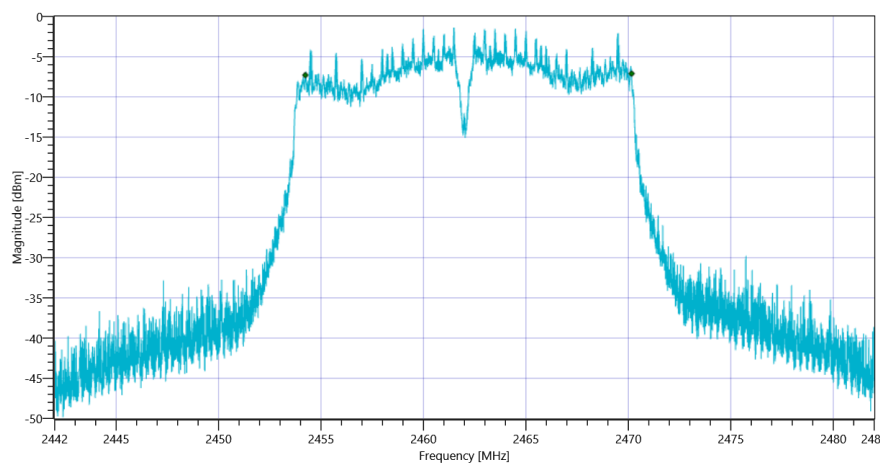

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:34:34
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.96	dBm	INFO
Ref. Frequency	---	---	2469.290	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.96 15.92 10
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-15.73	dBm/3KHz	PASS

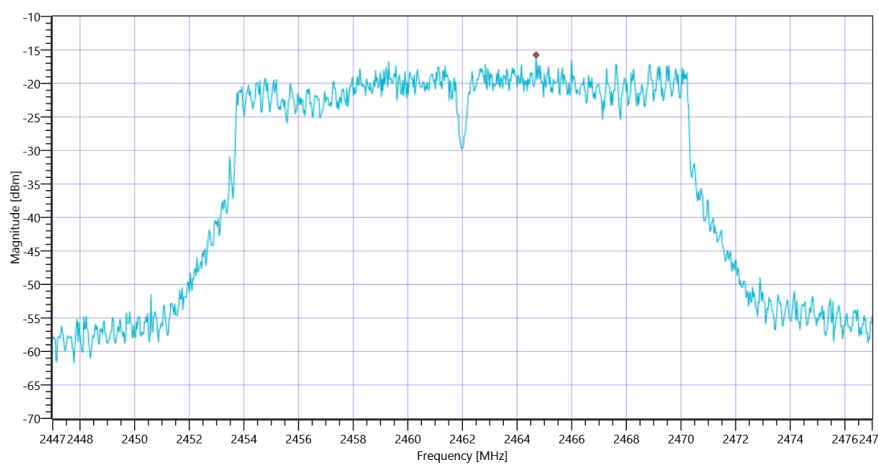

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

General verdict

PASS

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:35:20
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.31	dBm	INFO
Ref. Frequency	---	---	2469.090	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.31 15.92 10
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17326.267	kHz	INFO
T1 99%	2400.000000	---	2453.4289	MHz	PASS
T2 99%	---	2483.500000	2470.7551	MHz	PASS

Plot: Bandwidth only

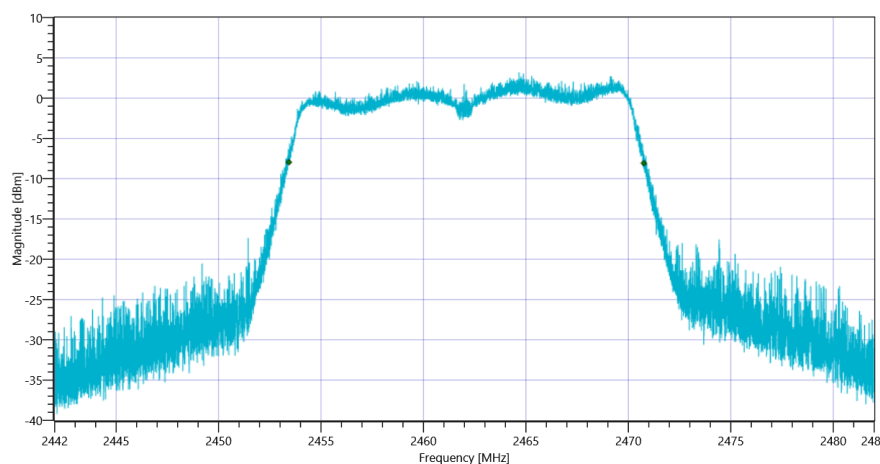

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 99PCT


Plot: Bandwidth within Band

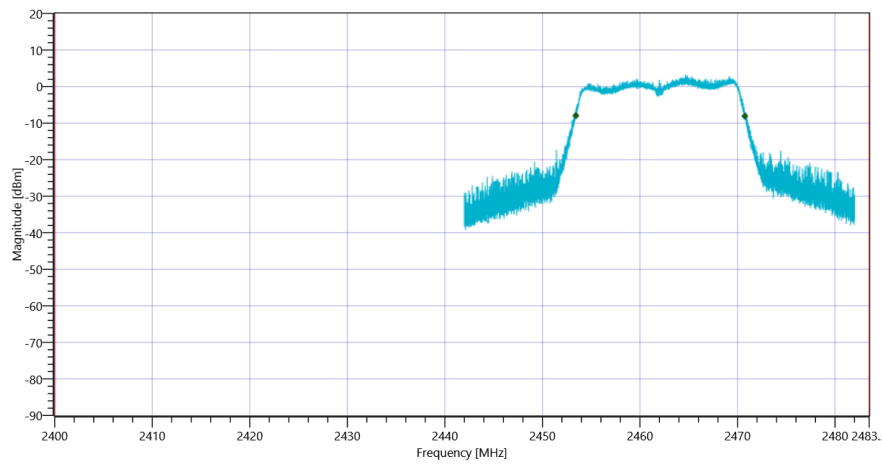

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19568	kHz	INFO
T1 20dB	2400.000000	---	2452.3120	MHz	PASS
T2 20dB	---	2483.500000	2471.8800	MHz	PASS

Plot: Bandwidth only

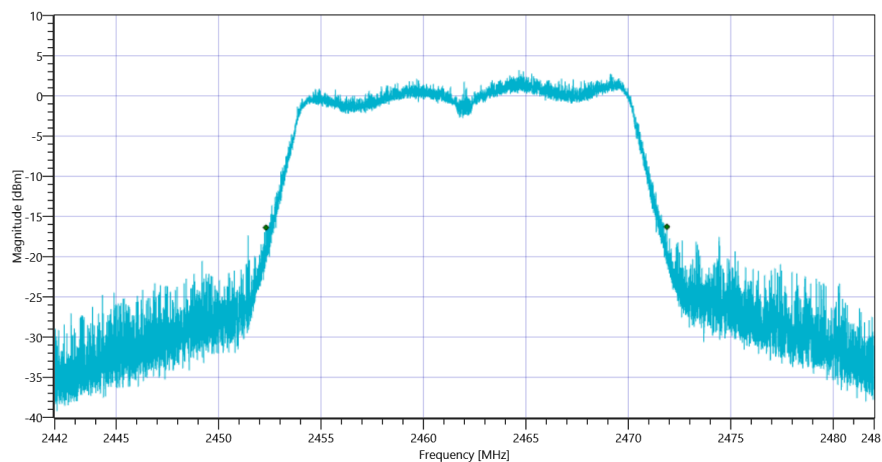

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 20dB

Plot: Bandwidth within Band

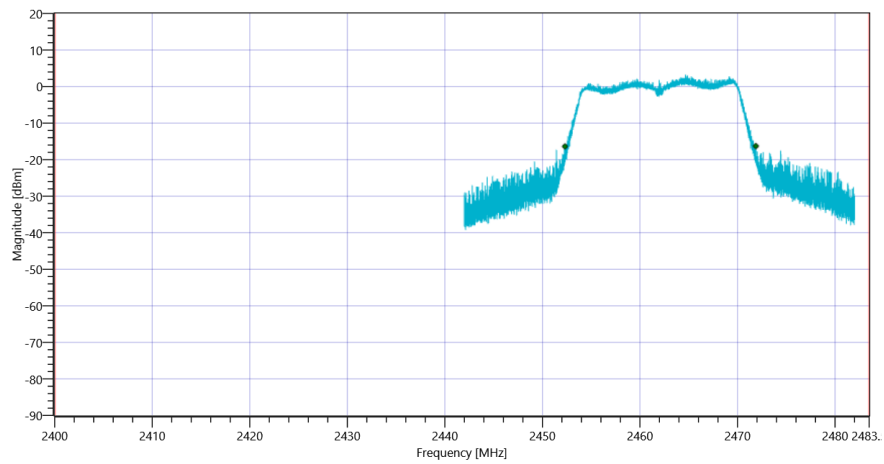

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:36:19
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.32	dBm	INFO
Ref. Frequency	---	---	2469.190	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.32 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2464.00 MHz	---	---	-1.07	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24900.333 MHz	0	---	14.55	dB	INFO

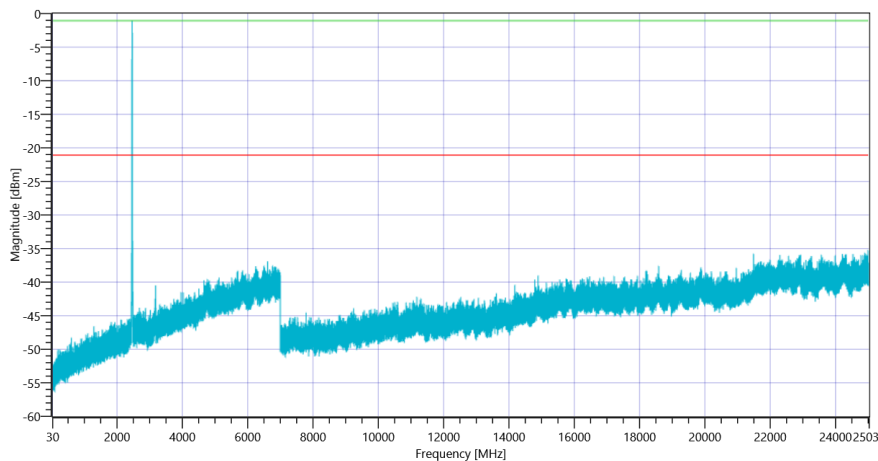

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2462

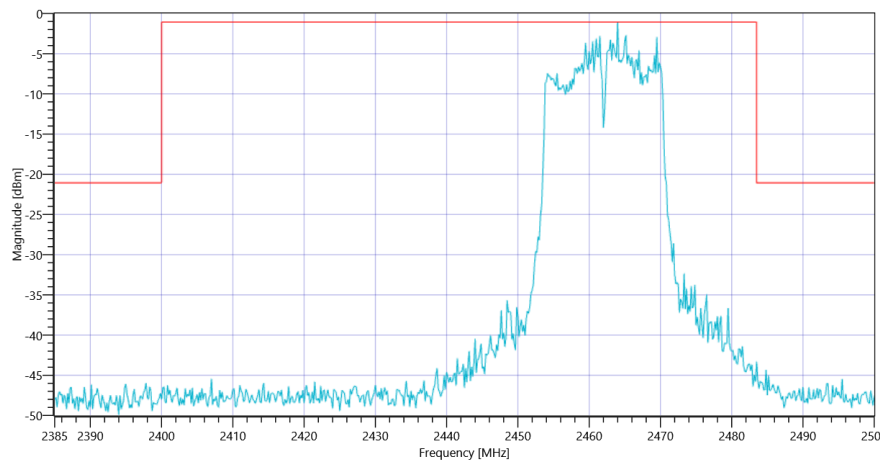

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2462

General verdict

PASS

FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References

TC Start	17.08.2021 15:43:15
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2462 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	22.24	dBm	PASS

General verdict

PASS

FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode

Test References

TC Start	17.08.2021 15:45:15
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	9.09	dBm	INFO
Ref. Frequency	---	---	2409.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.09 16.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	17524	kHz	PASS

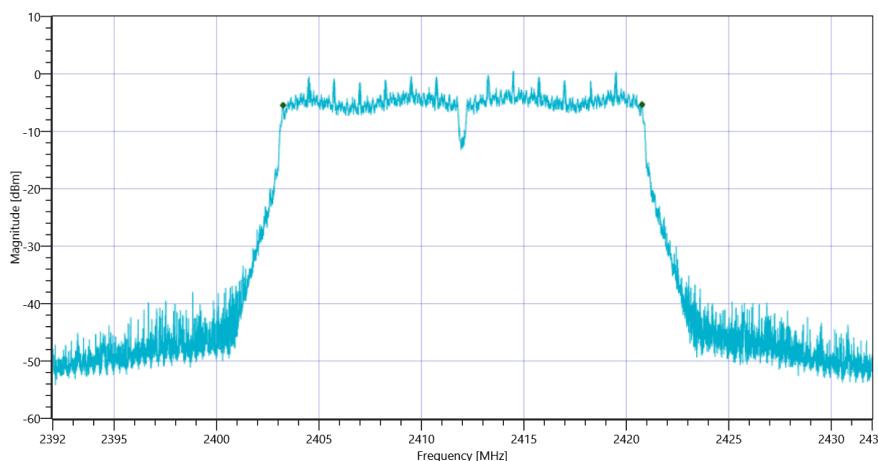

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References

TC Start	17.08.2021 15:45:55
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.79	dBm	INFO
Ref. Frequency	---	---	2414.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.79 16.15 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-13.04	dBm/3KHz	PASS

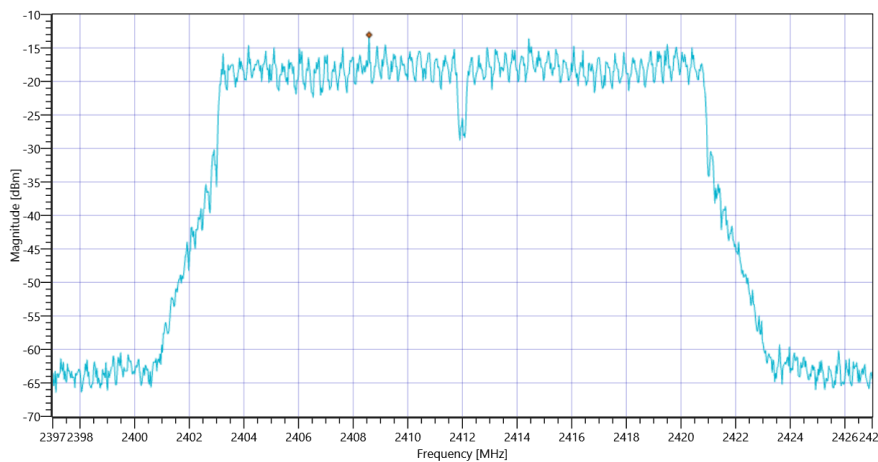

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

General verdict

PASS

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode

Test References	
TC Start	17.08.2021 15:46:41
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.81	dBm	INFO
Ref. Frequency	---	---	2414.200	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.81 16.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17946.205	kHz	INFO
T1 99%	2400.000000	---	2403.0489	MHz	PASS
T2 99%	---	2483.500000	2420.9951	MHz	PASS

Plot: Bandwidth only

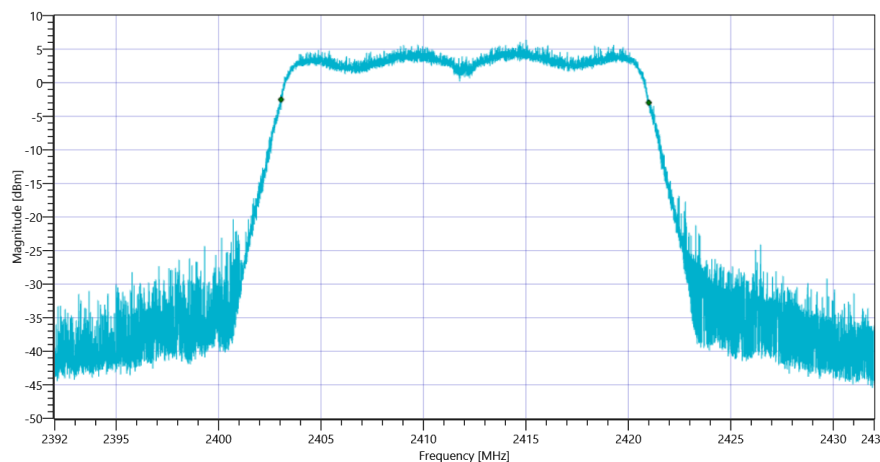

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode 99PCT


Plot: Bandwidth within Band

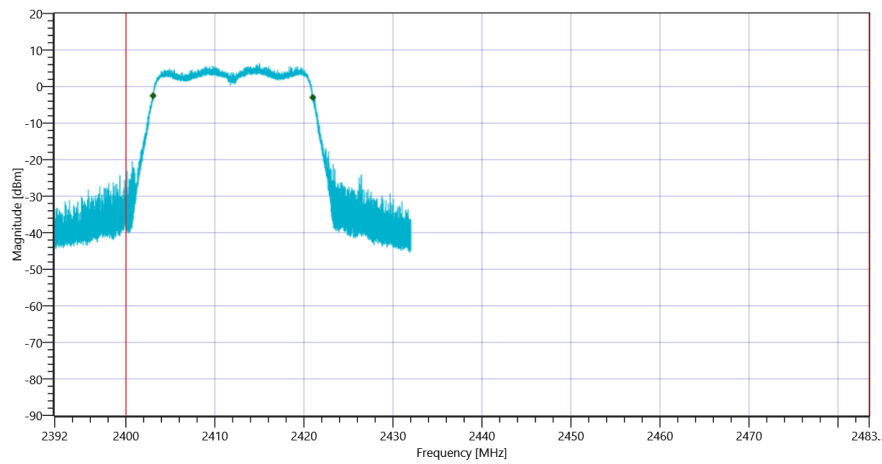

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19752	kHz	INFO
T1 20dB	2400.000000	---	2402.1440	MHz	PASS
T2 20dB	---	2483.500000	2421.8960	MHz	PASS

Plot: Bandwidth only

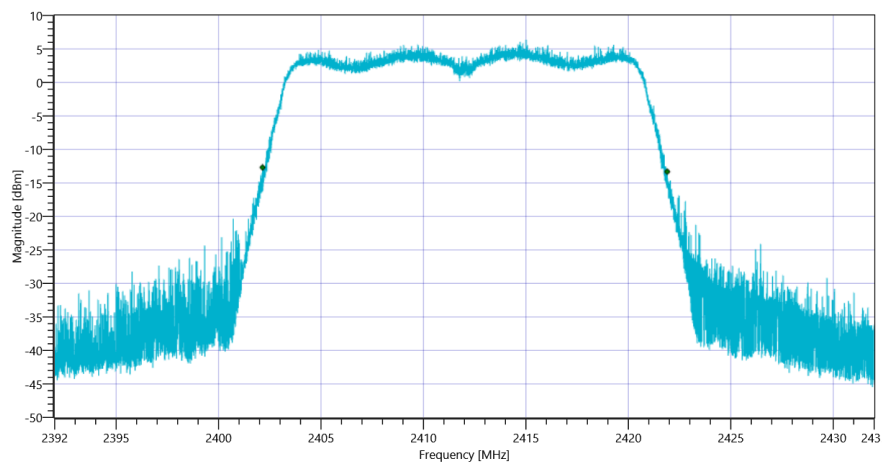

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode 20dB

Plot: Bandwidth within Band

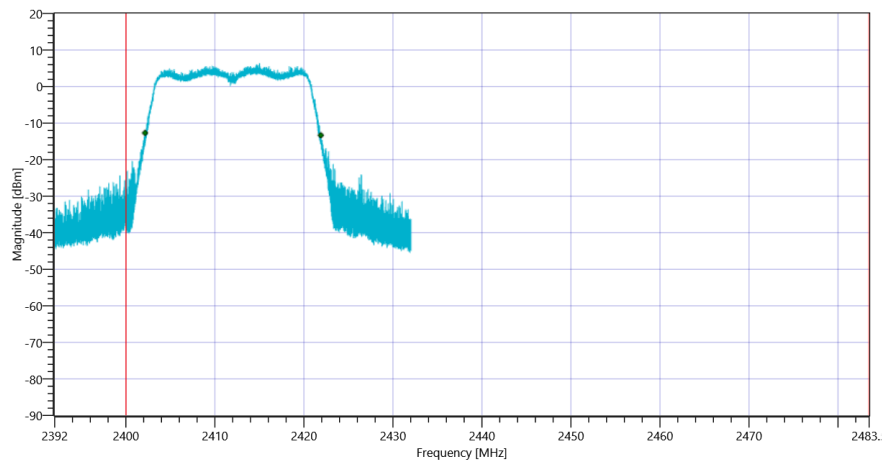

FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode

Test References	
TC Start	17.08.2021 15:47:41
Ambit Temp [°C] Humidity [rel%]	25.9 38
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.80	dBm	INFO
Ref. Frequency	---	---	2409.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.80 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2410.83 MHz	---	---	-0.60	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24340.833 MHz	0	---	14.15	dB	INFO

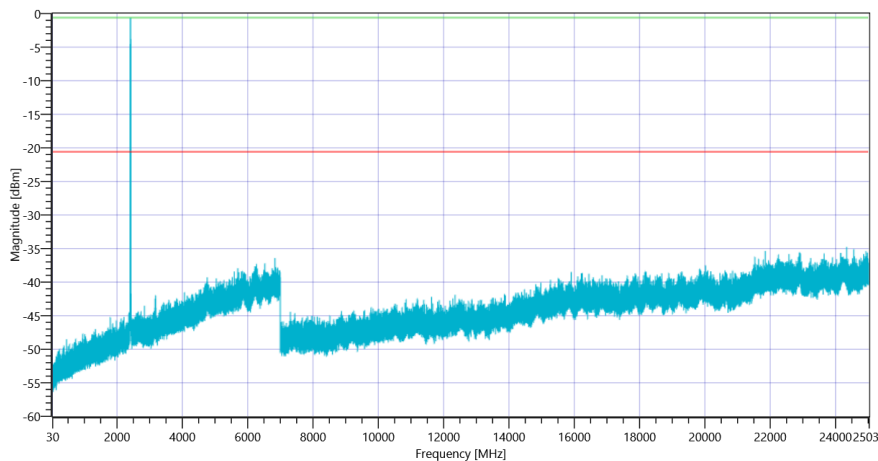

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2412