

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

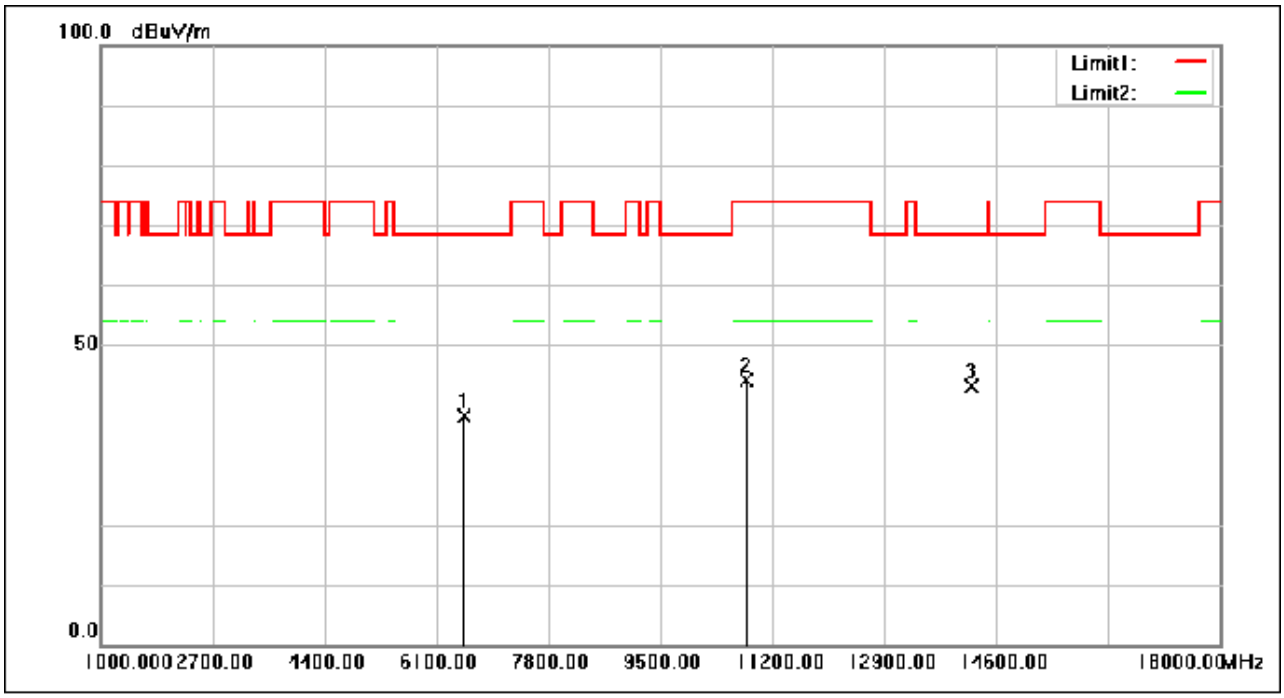


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6535.880	49.13	-10.93	38.20	68.30	-30.10	peak
2	10825.320	50.39	-6.36	44.03	74.00	-29.97	peak
3	14230.080	49.68	-6.46	43.22	68.30	-25.08	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

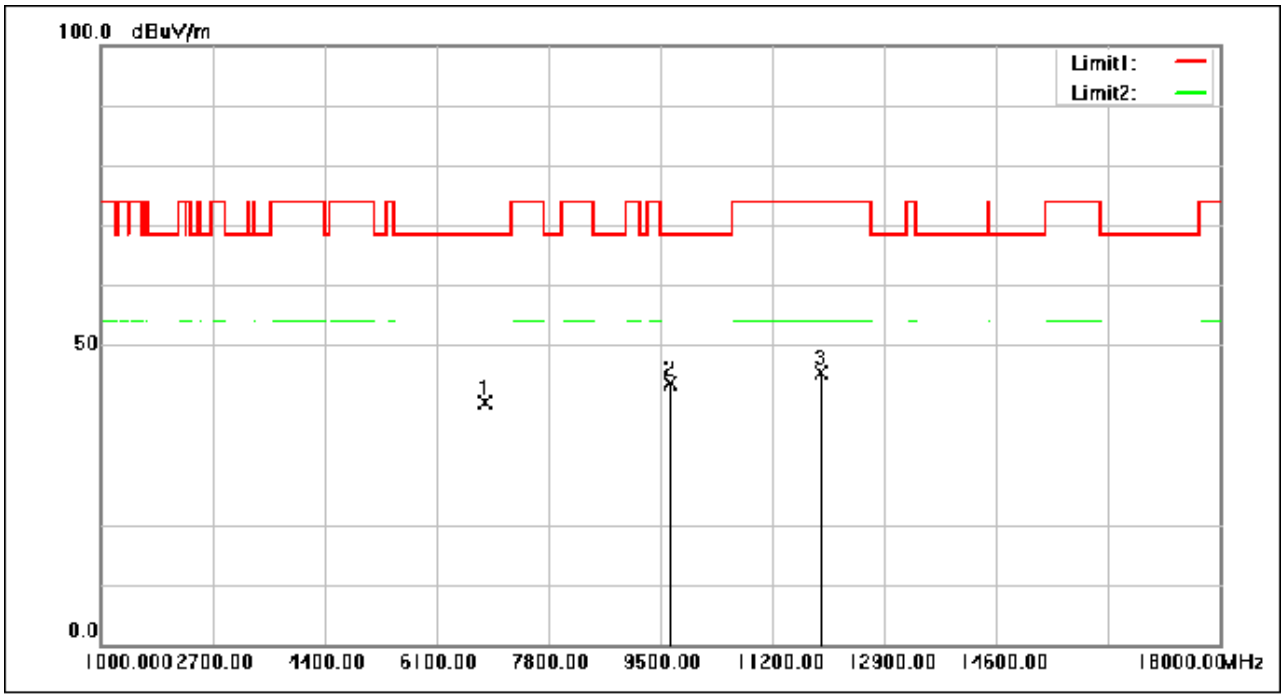


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6844.600	50.32	-10.06	40.26	68.30	-28.04	peak
2	9653.680	50.26	-6.63	43.63	68.30	-24.67	peak
3	11941.880	51.73	-6.39	45.34	74.00	-28.66	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

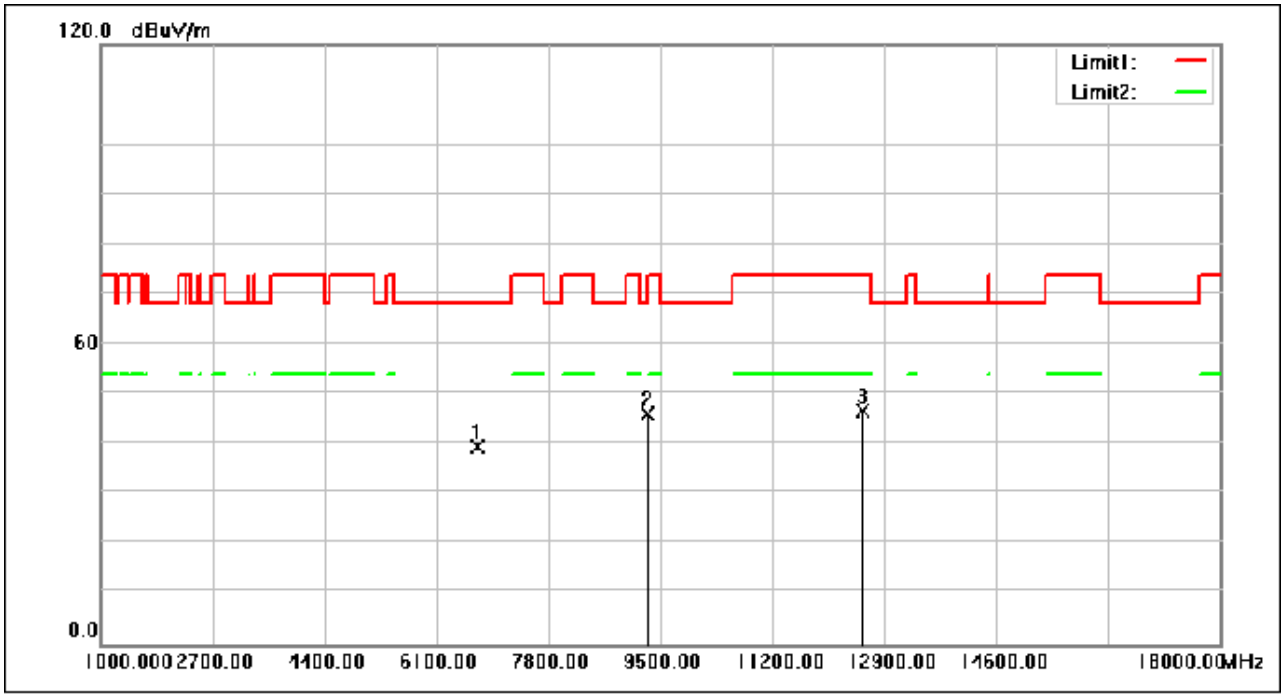


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6737.500	49.72	-10.13	39.59	68.30	-28.71	peak
2	9321.500	53.22	-7.19	46.03	74.00	-27.97	peak
3	12584.650	52.52	-5.89	46.63	74.00	-27.37	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

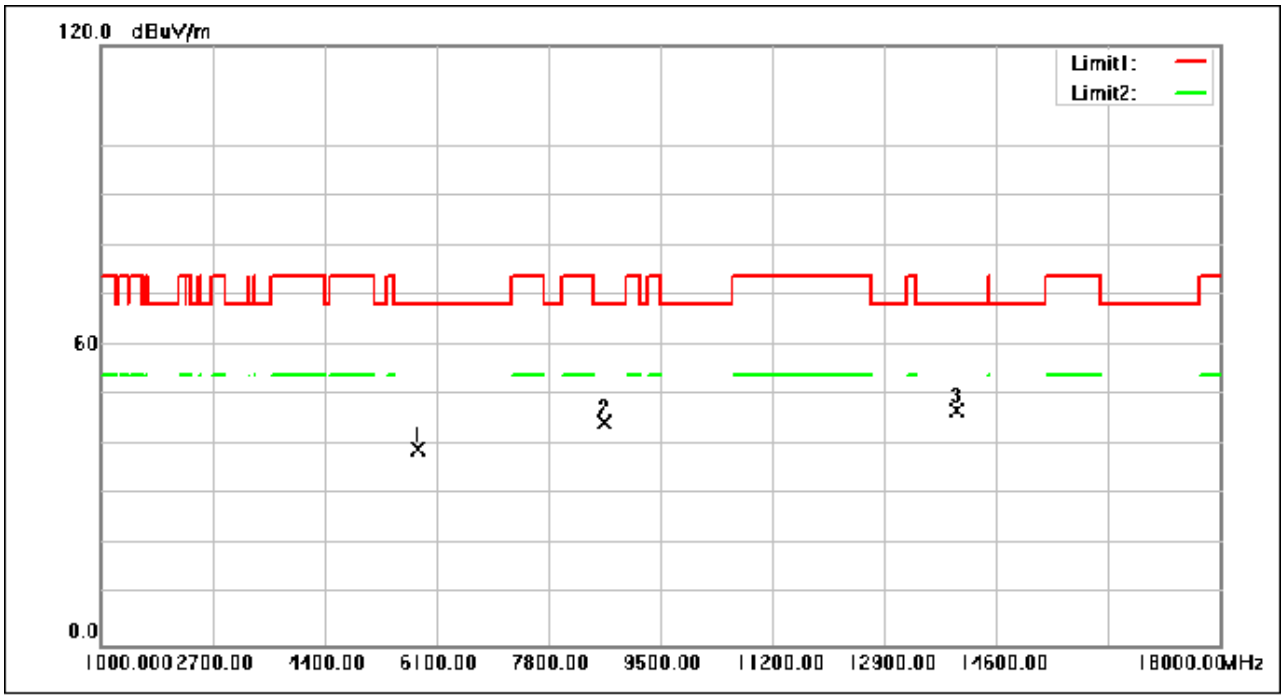


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5824.600	53.22	-14.14	39.08	68.30	-29.22	peak
2	8664.450	53.06	-8.45	44.61	68.30	-23.69	peak
3	14007.550	53.39	-6.33	47.06	68.30	-21.24	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

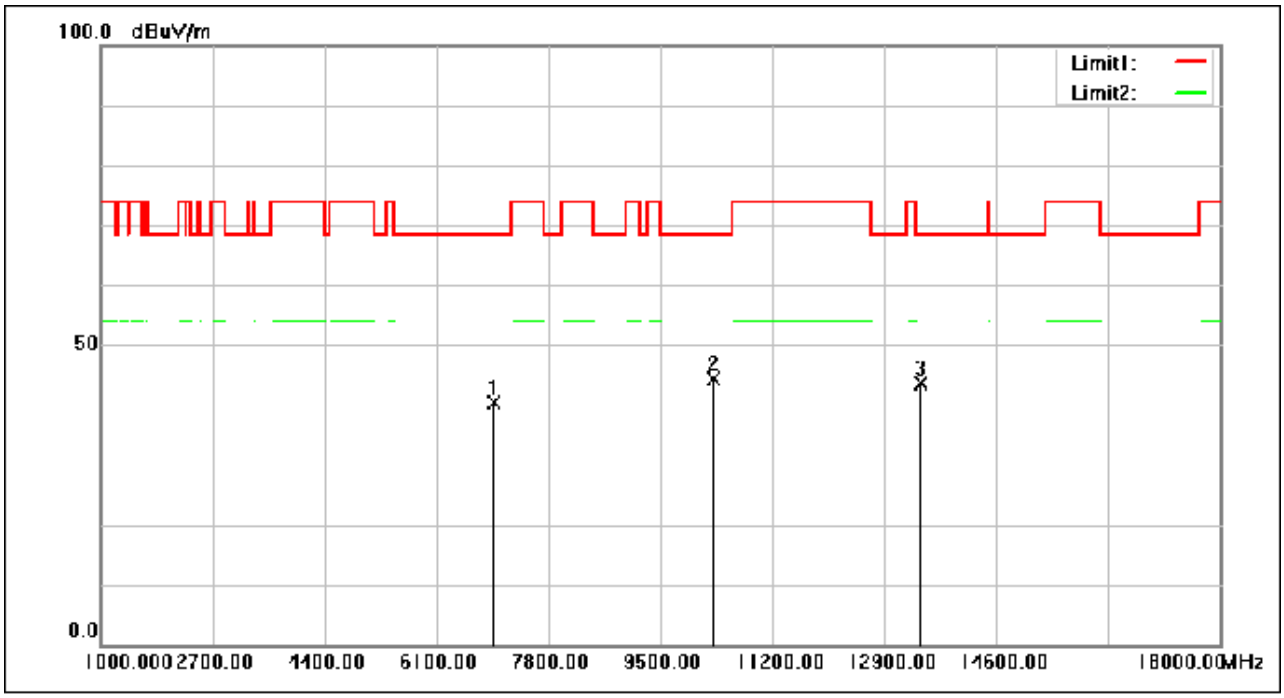


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6981.280	50.24	-9.98	40.26	68.30	-28.04	peak
2	10306.480	50.87	-6.37	44.50	68.30	-23.80	peak
3	13461.680	49.40	-5.71	43.69	68.30	-24.61	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

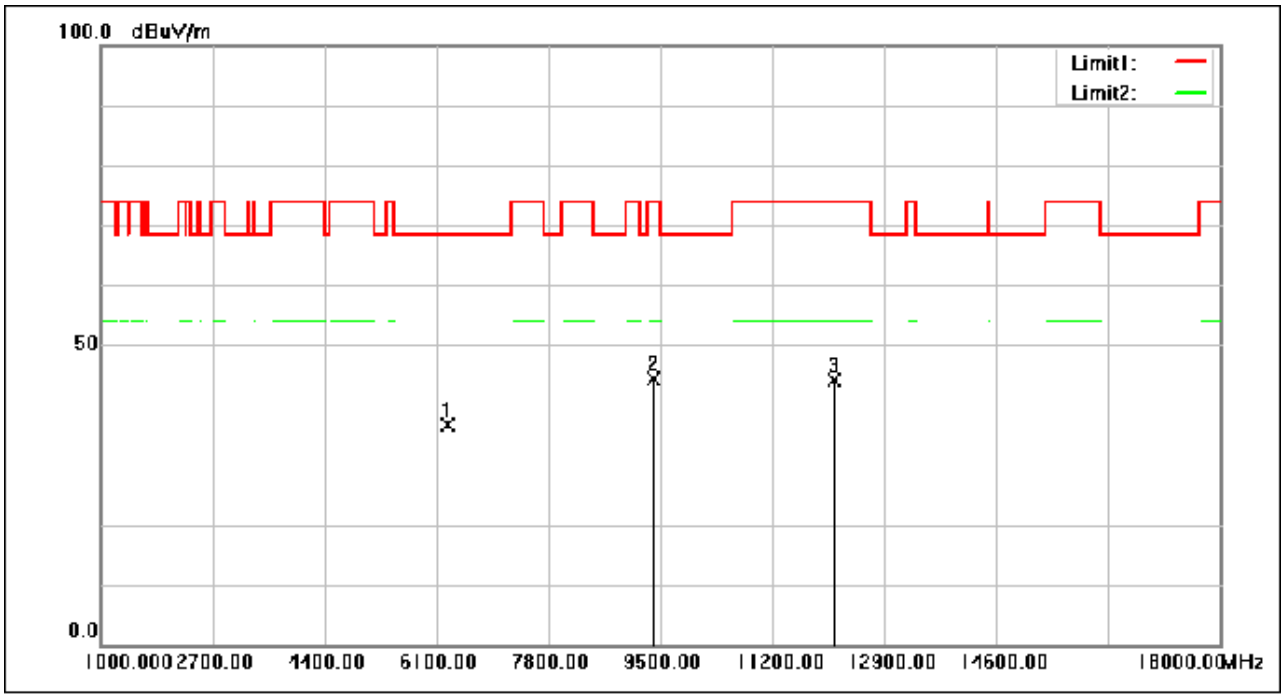


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6272.040	48.58	-12.01	36.57	68.30	-31.73	peak
2	9408.200	51.32	-7.05	44.27	74.00	-29.73	peak
3	12138.400	50.30	-6.27	44.03	74.00	-29.97	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

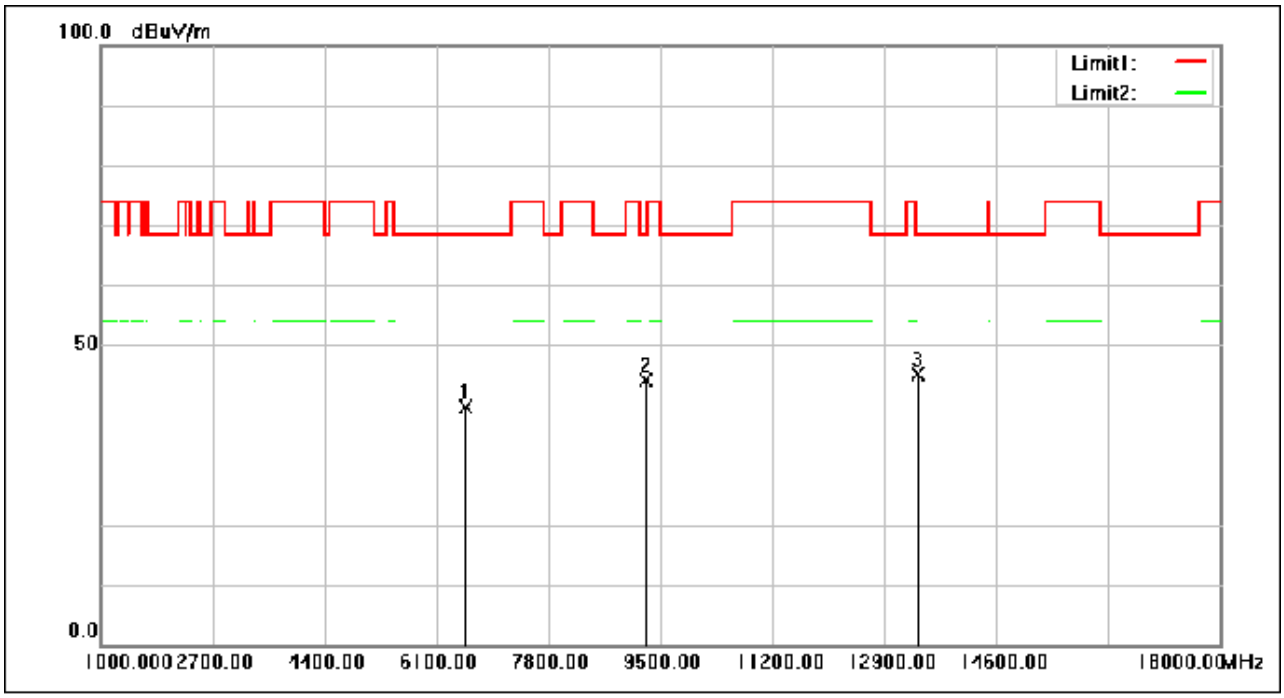


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6554.920	50.52	-10.85	39.67	68.30	-28.63	peak
2	9292.600	51.30	-7.24	44.06	68.30	-24.24	peak
3	13410.680	50.82	-5.68	45.14	68.30	-23.16	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

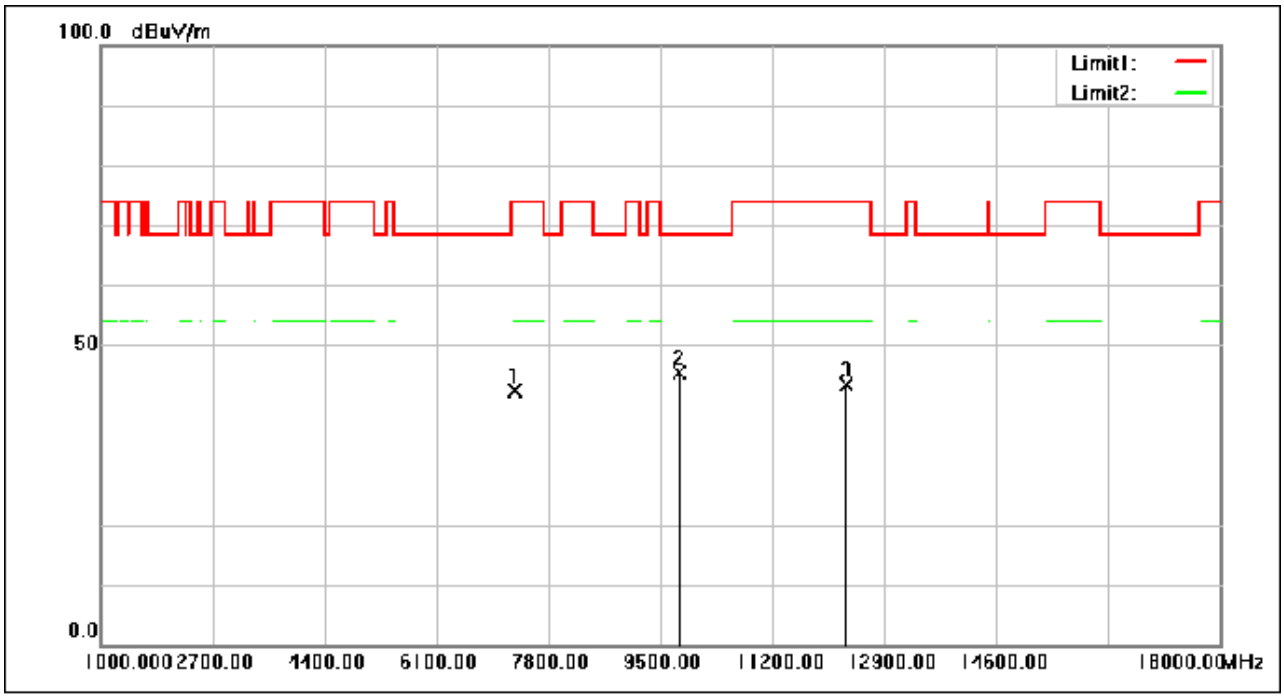


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7301.560	52.08	-9.71	42.37	74.00	-31.63	peak
2	9803.280	51.72	-6.36	45.36	68.30	-22.94	peak
3	12331.520	49.60	-6.10	43.50	74.00	-30.50	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

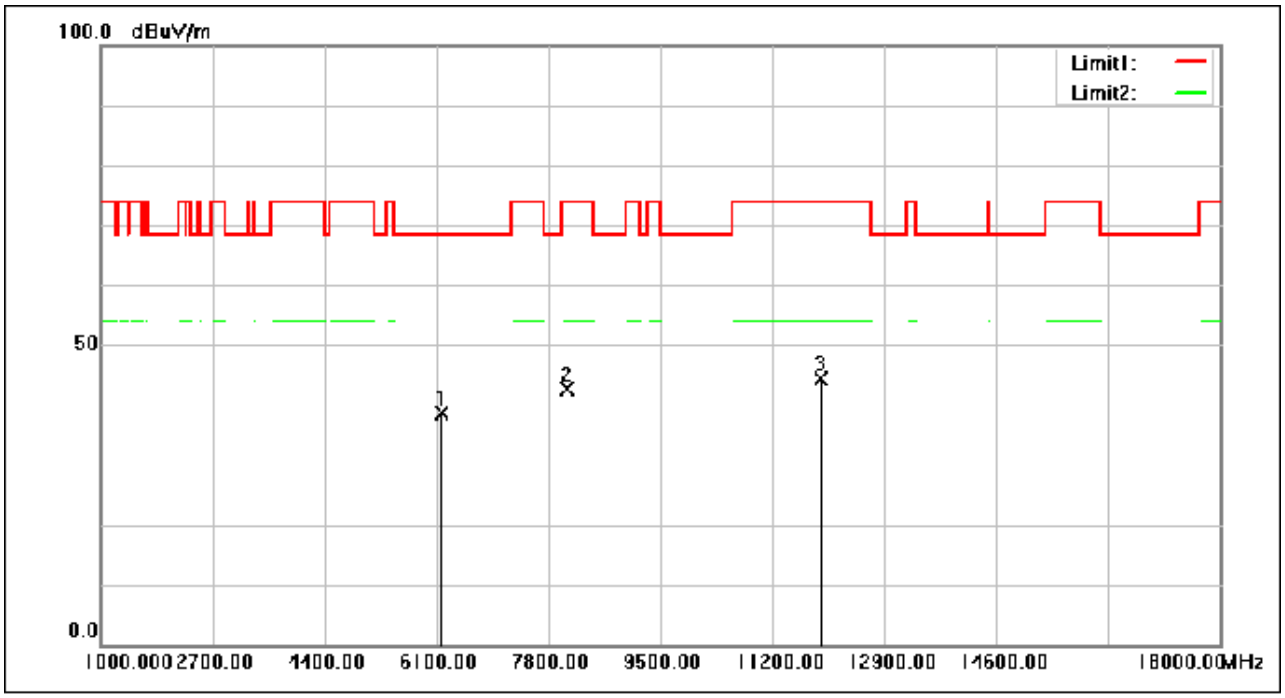


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6185.000	51.01	-12.37	38.64	68.30	-29.66	peak
2	8097.160	51.90	-9.35	42.55	74.00	-31.45	peak
3	11938.480	50.78	-6.39	44.39	74.00	-29.61	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

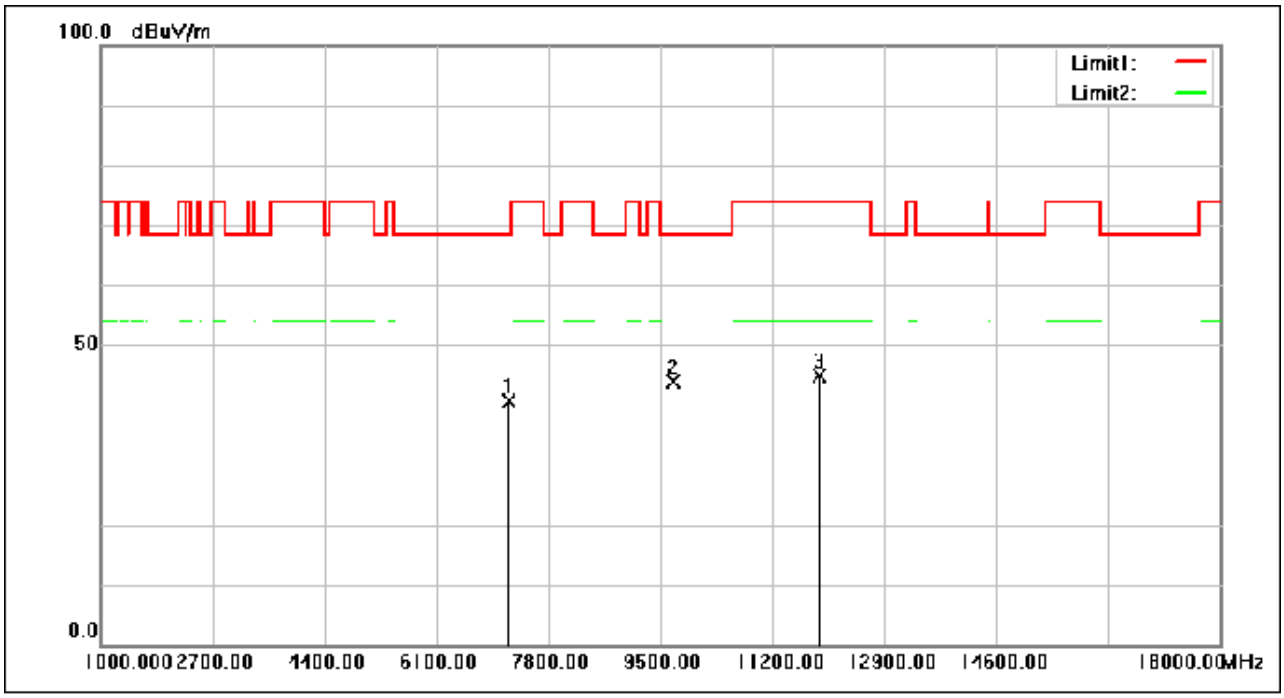


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7221.320	50.41	-9.78	40.63	68.30	-27.67	peak
2	9693.120	50.53	-6.56	43.97	68.30	-24.33	peak
3	11921.480	51.15	-6.39	44.76	74.00	-29.24	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

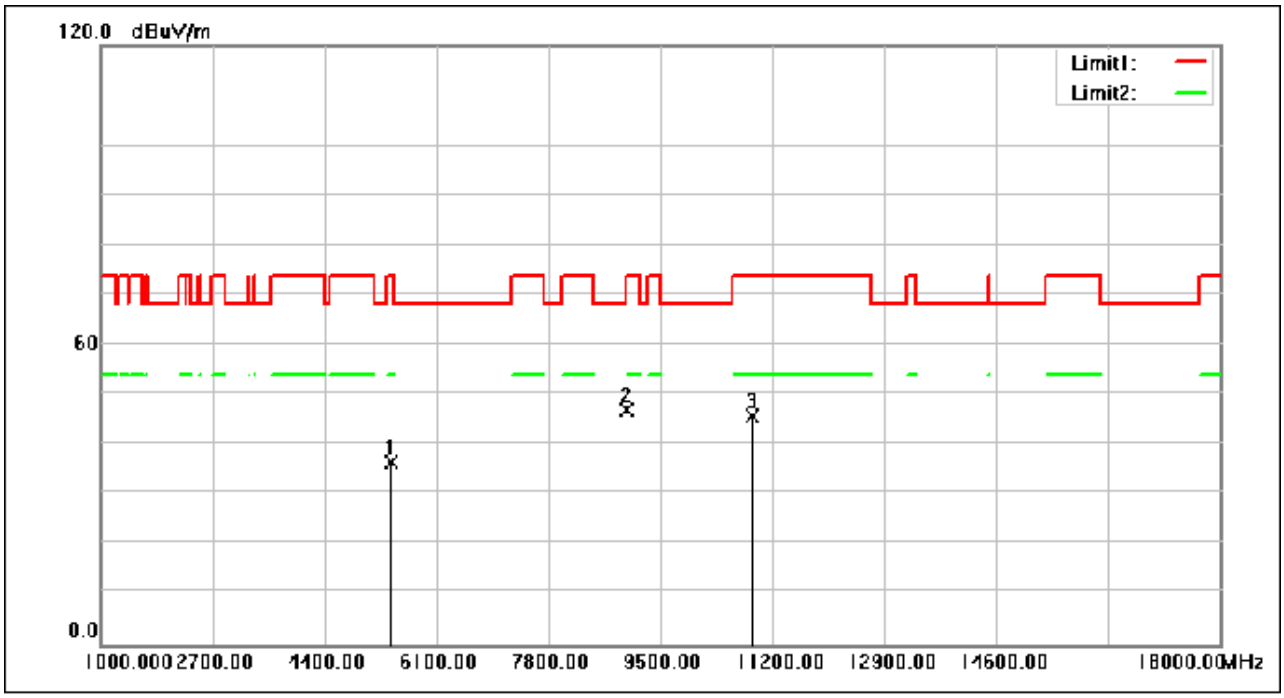


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5403.850	51.74	-15.40	36.34	74.00	-37.66	peak
2	9006.150	54.53	-7.69	46.84	74.00	-27.16	peak
3	10903.350	52.19	-6.36	45.83	74.00	-28.17	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

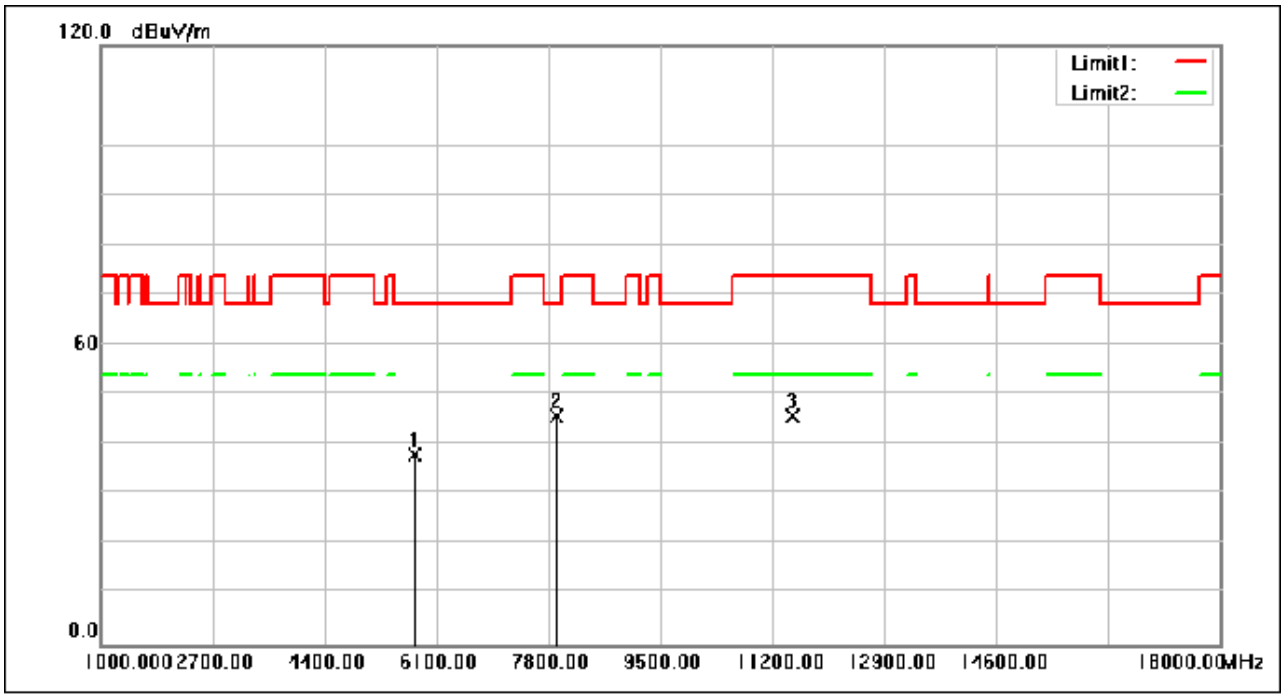


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5778.700	52.24	-14.35	37.89	68.30	-30.41	peak
2	7924.100	55.28	-9.50	45.78	68.30	-22.52	peak
3	11511.100	51.88	-6.07	45.81	74.00	-28.19	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

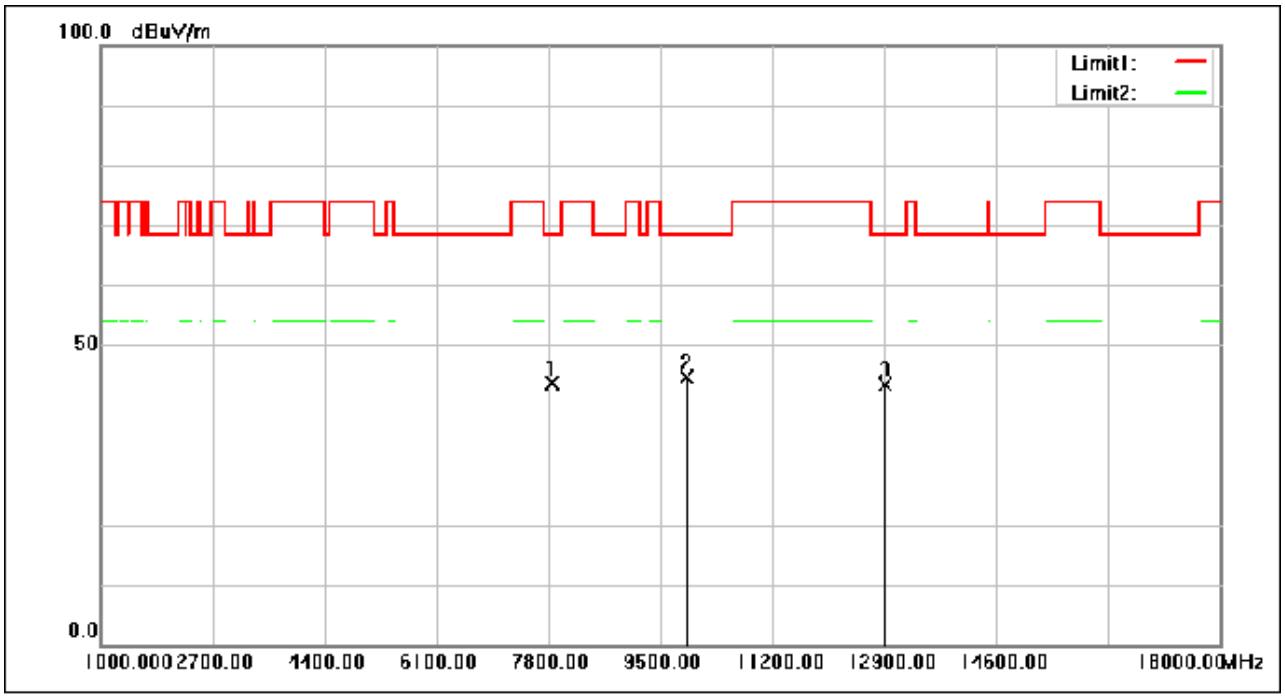


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7866.640	53.12	-9.49	43.63	68.30	-24.67	peak
2	9892.360	50.96	-6.30	44.66	68.30	-23.64	peak
3	12929.920	49.00	-5.60	43.40	68.30	-24.90	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

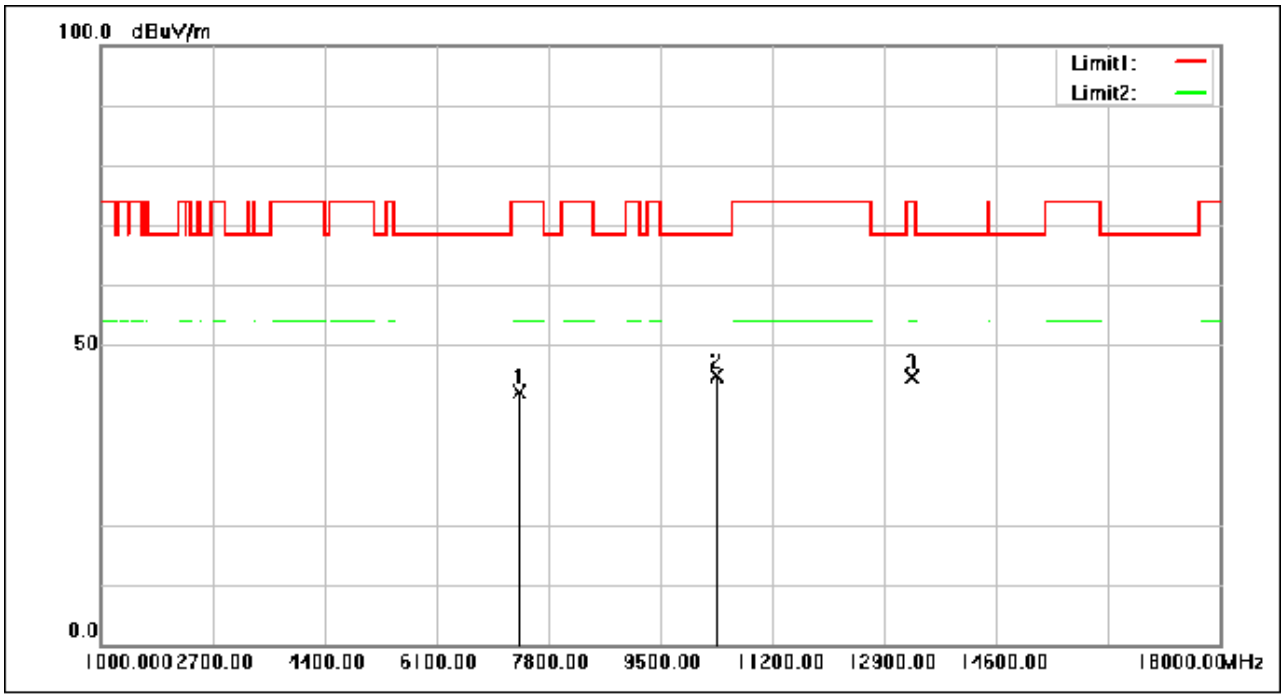


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7368.880	51.88	-9.66	42.22	74.00	-31.78	peak
2	10366.320	51.27	-6.37	44.90	68.30	-23.40	peak
3	13329.760	50.36	-5.64	44.72	74.00	-29.28	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

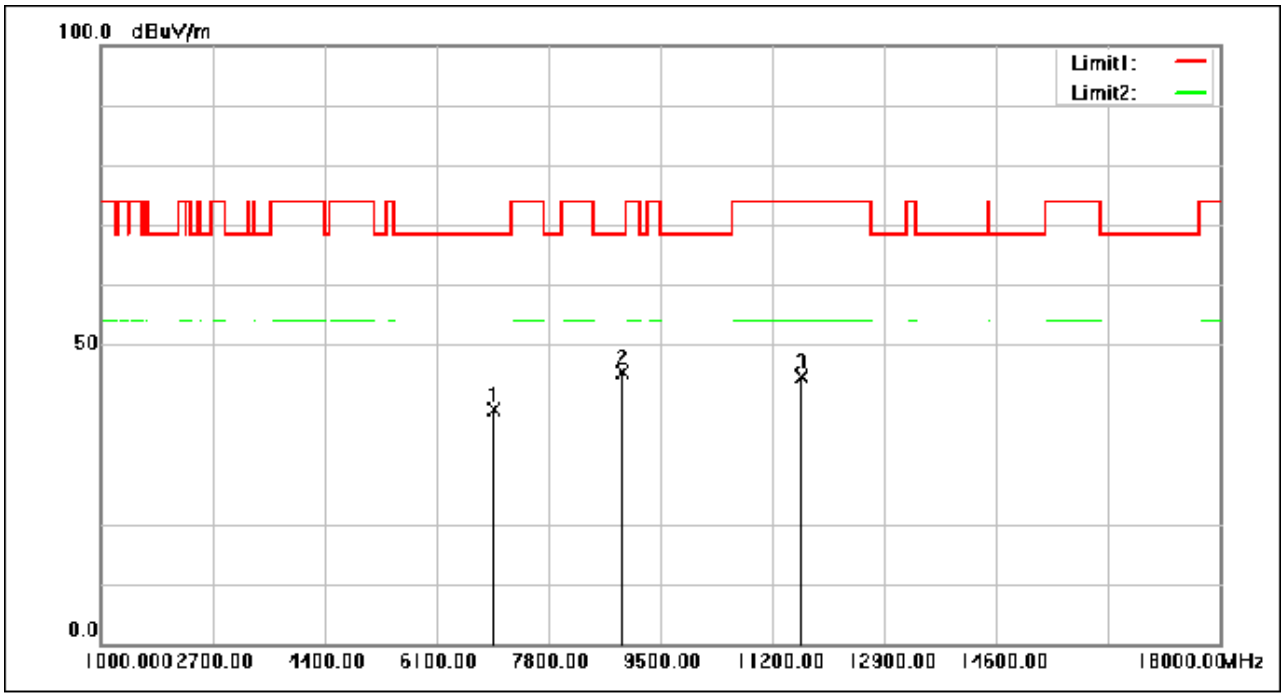


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6977.200	49.12	-9.98	39.14	68.30	-29.16	peak
2	8929.480	53.38	-7.88	45.50	68.30	-22.80	peak
3	11652.880	50.88	-6.18	44.70	74.00	-29.30	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

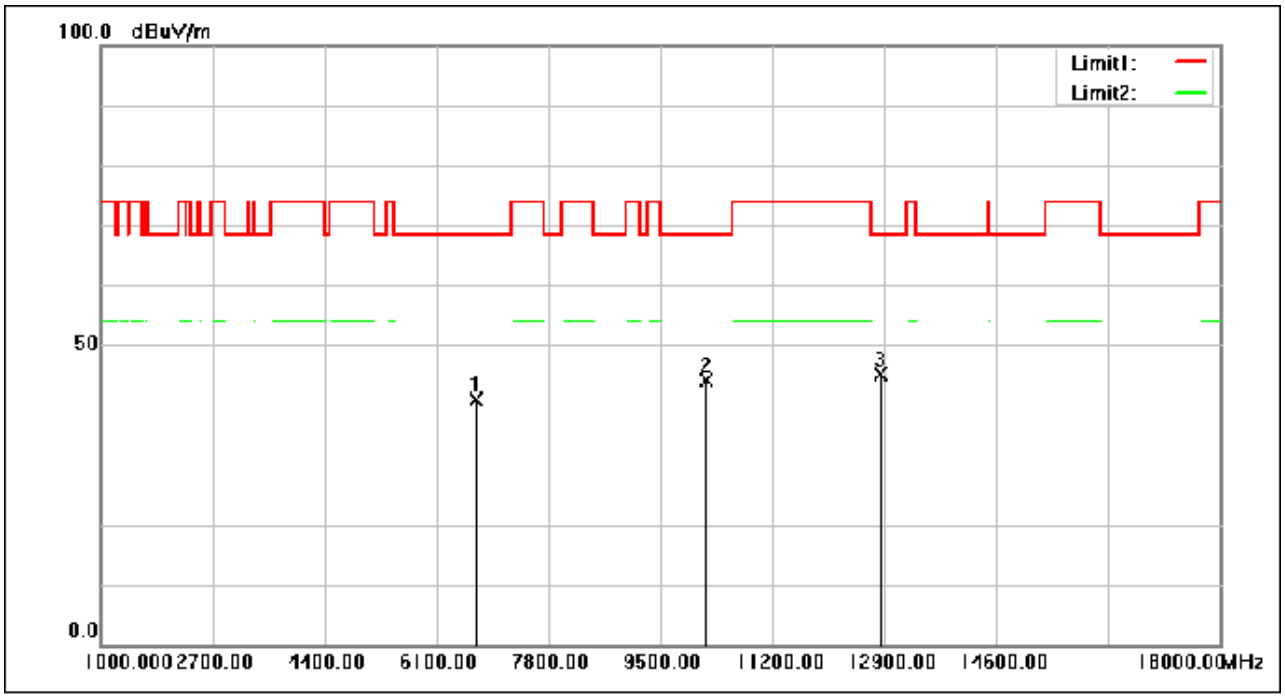


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6700.440	51.22	-10.25	40.97	68.30	-27.33	peak
2	10201.080	50.41	-6.35	44.06	68.30	-24.24	peak
3	12863.280	50.85	-5.66	45.19	68.30	-23.11	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

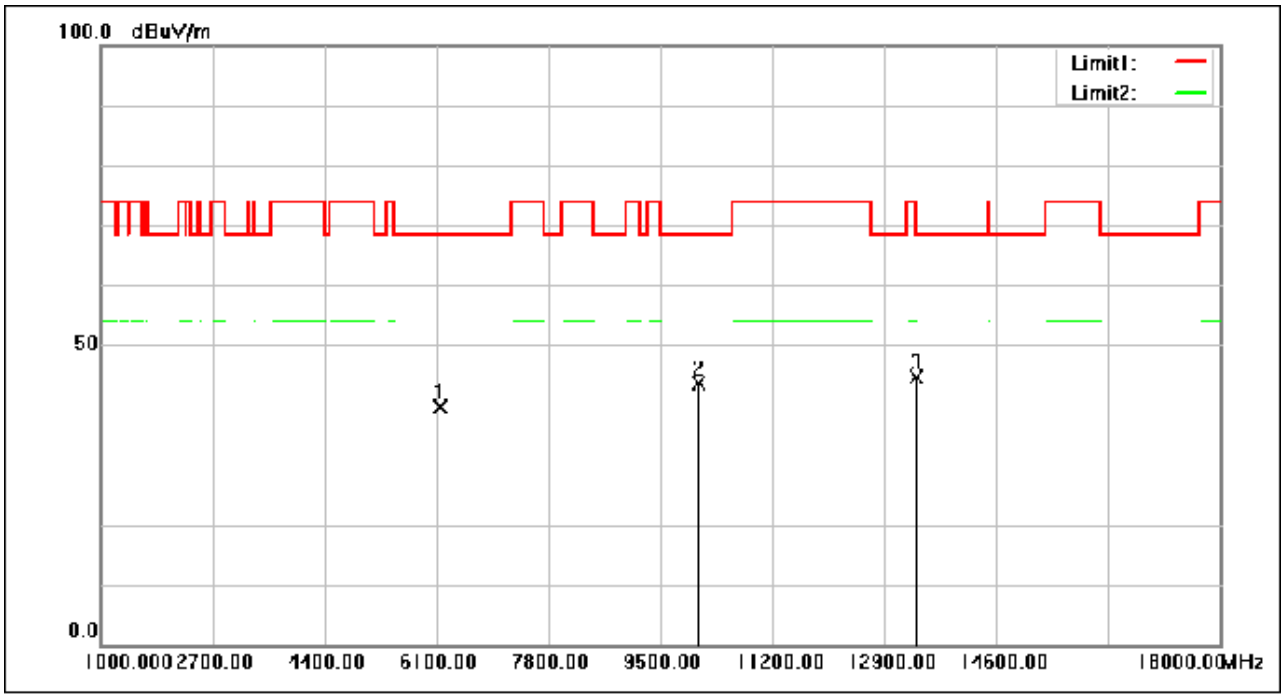


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6159.160	52.02	-12.48	39.54	68.30	-28.76	peak
2	10083.440	50.00	-6.34	43.66	68.30	-24.64	peak
3	13409.320	50.26	-5.68	44.58	68.30	-23.72	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

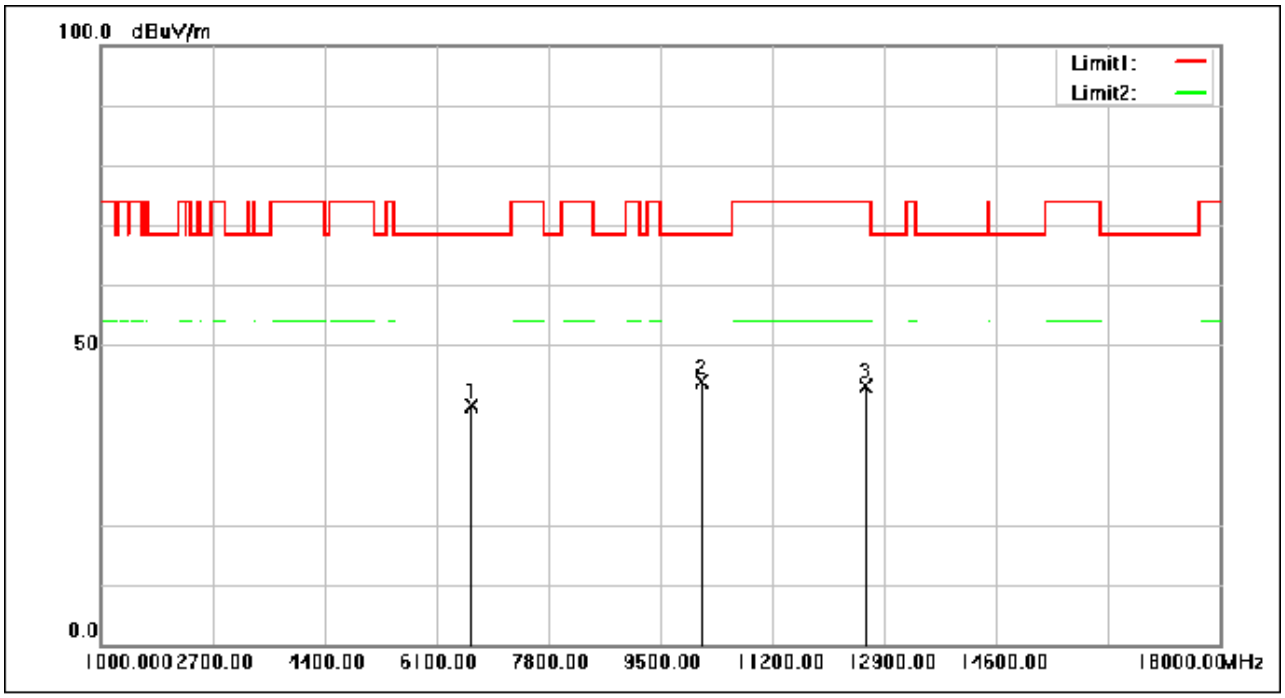


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6634.480	50.51	-10.52	39.99	68.30	-28.31	peak
2	10129.680	50.26	-6.34	43.92	68.30	-24.38	peak
3	12621.200	48.91	-5.87	43.04	74.00	-30.96	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

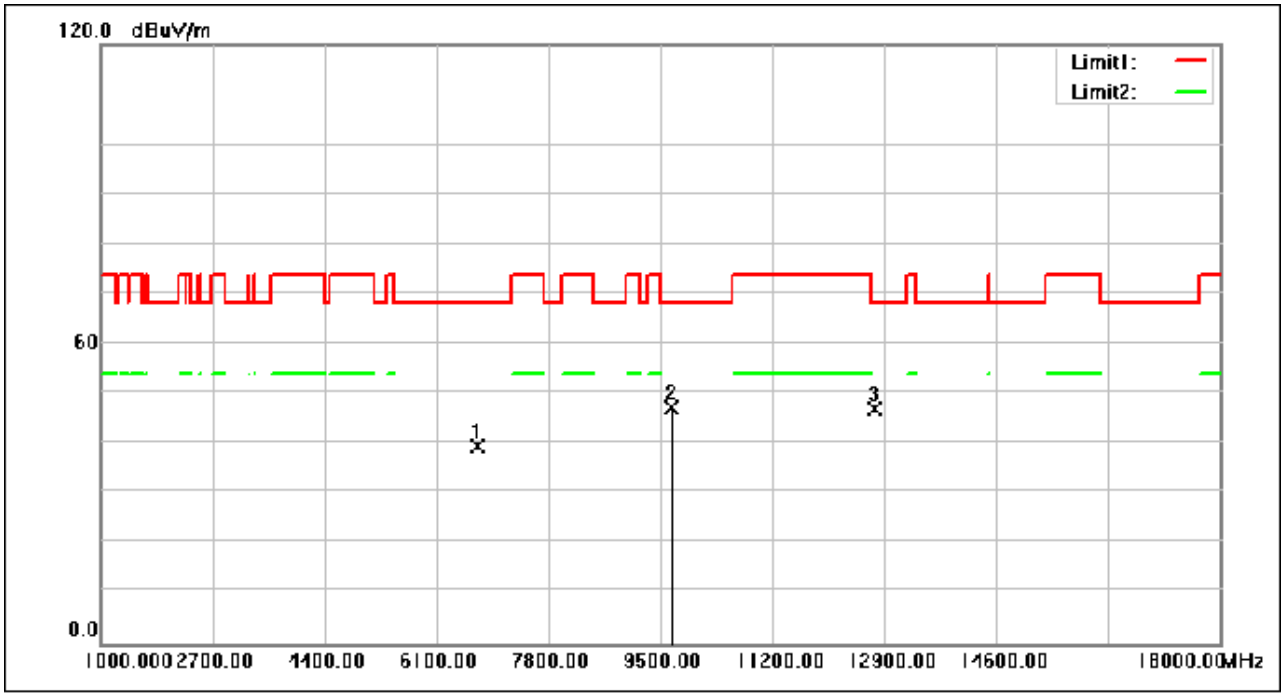


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6741.750	49.48	-10.13	39.35	68.30	-28.95	peak
2	9674.250	53.71	-6.59	47.12	68.30	-21.18	peak
3	12760.600	52.75	-5.75	47.00	68.30	-21.30	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

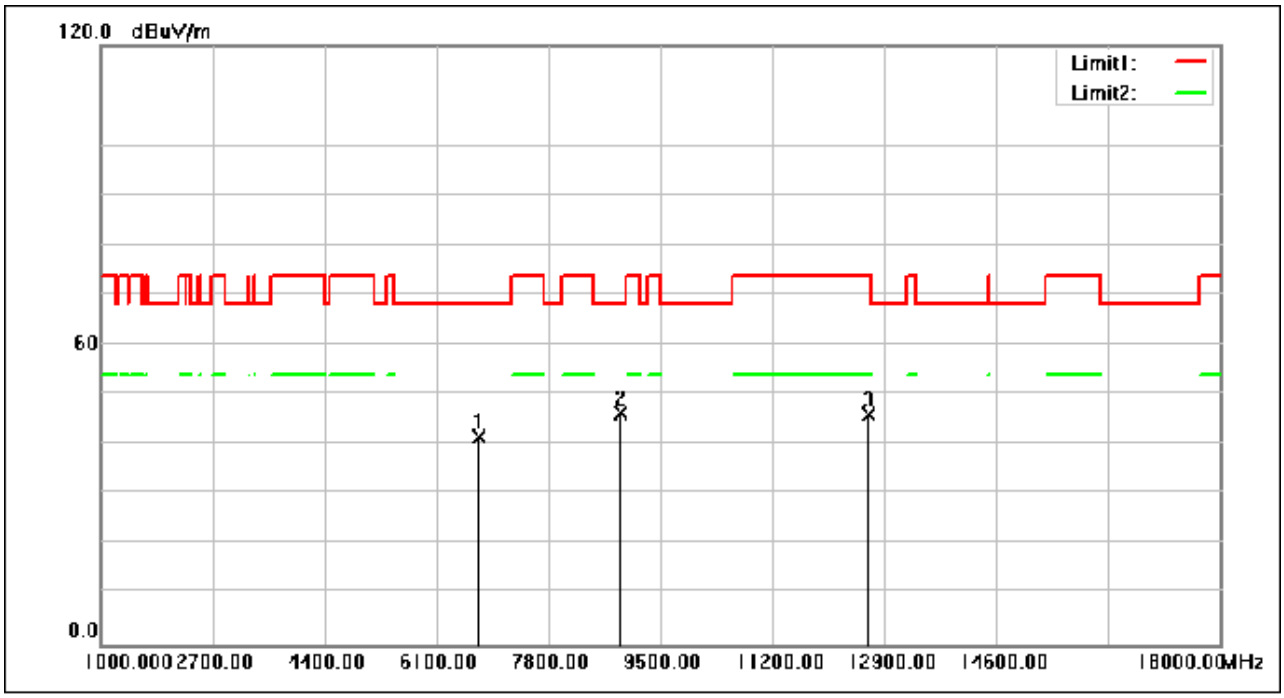


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6758.750	51.65	-10.12	41.53	68.30	-26.77	peak
2	8916.900	54.32	-7.91	46.41	68.30	-21.89	peak
3	12677.300	51.86	-5.81	46.05	74.00	-27.95	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

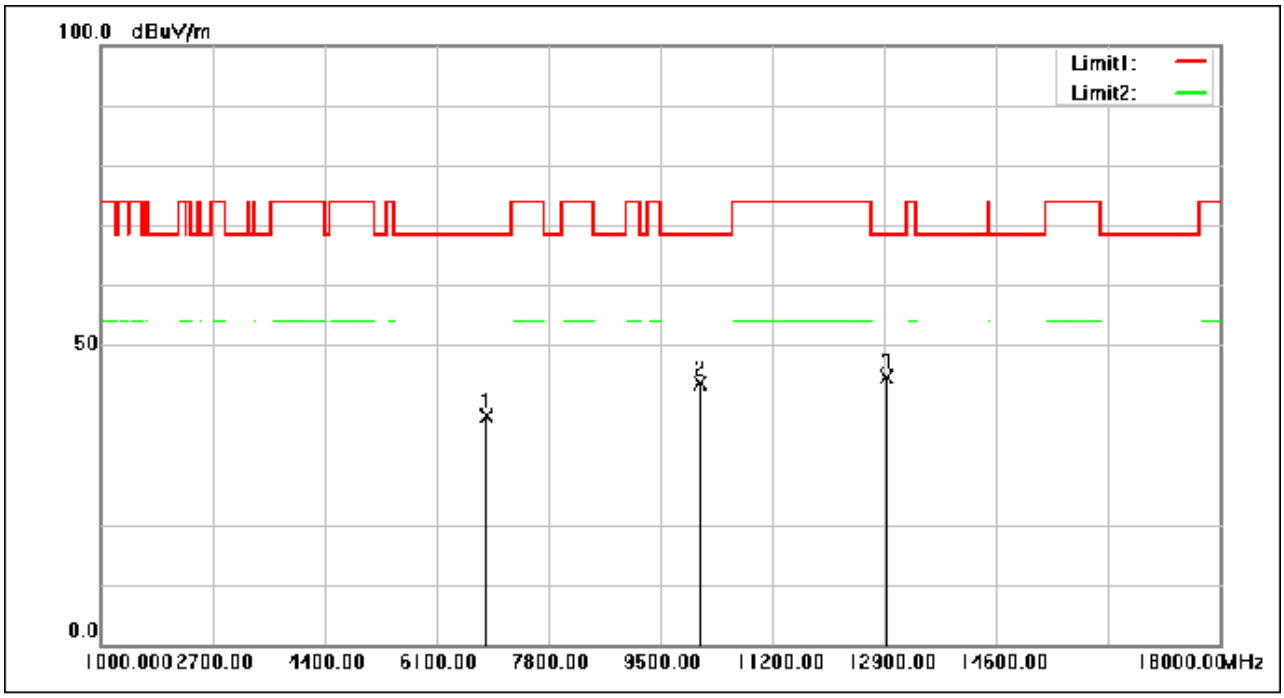


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6879.960	48.28	-10.04	38.24	68.30	-30.06	peak
2	10097.720	49.87	-6.34	43.53	68.30	-24.77	peak
3	12940.120	50.26	-5.59	44.67	68.30	-23.63	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

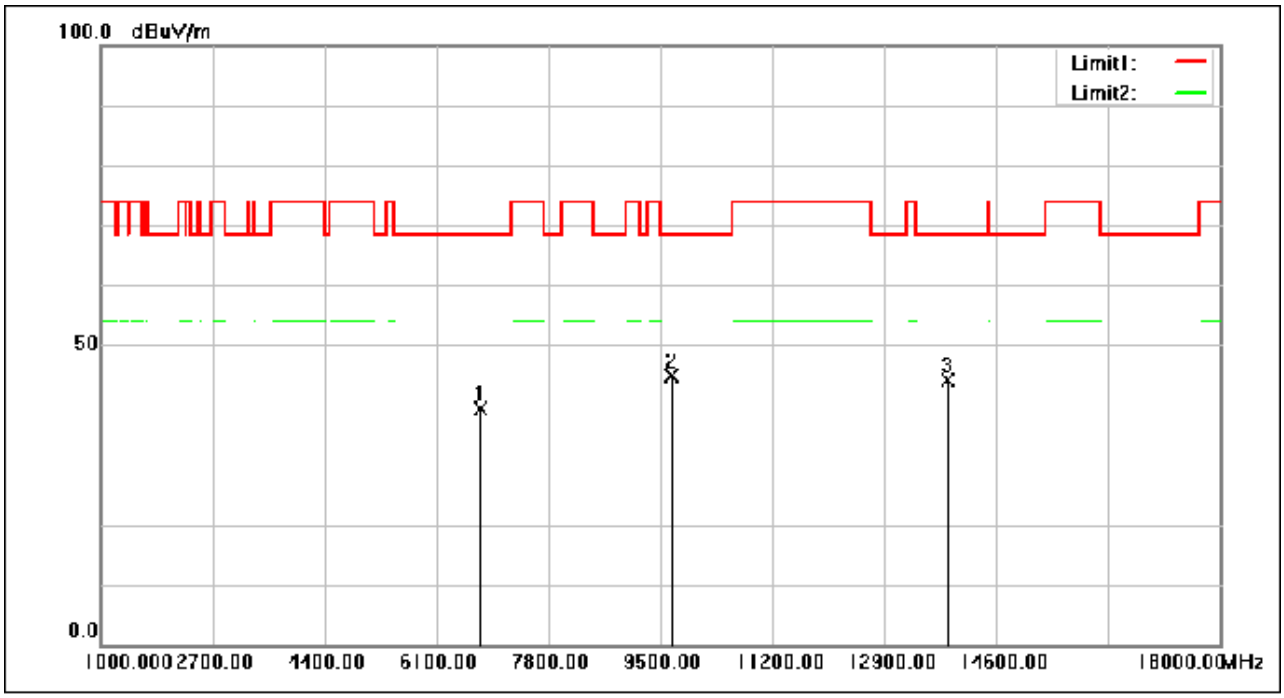


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6777.280	49.59	-10.11	39.48	68.30	-28.82	peak
2	9674.760	51.37	-6.59	44.78	68.30	-23.52	peak
3	13869.000	50.26	-6.17	44.09	68.30	-24.21	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

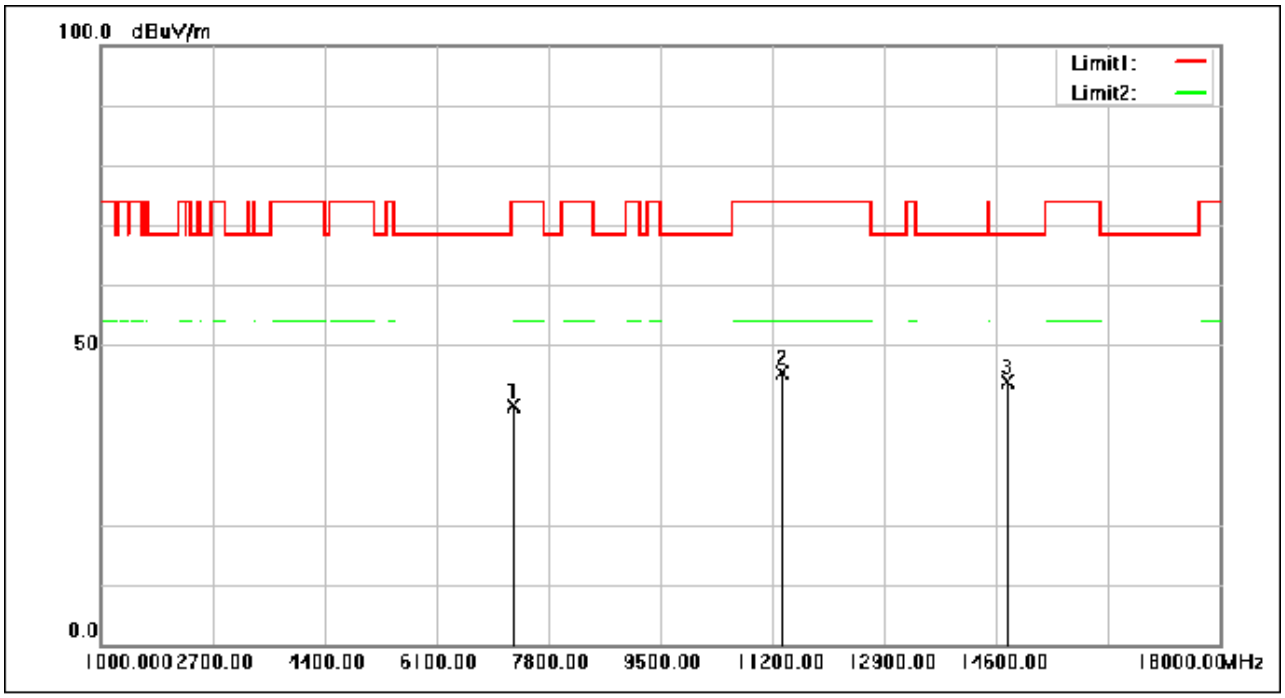


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7287.280	49.51	-9.72	39.79	74.00	-34.21	peak
2	11367.960	51.61	-6.14	45.47	74.00	-28.53	peak
3	14781.560	49.99	-6.01	43.98	68.30	-24.32	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

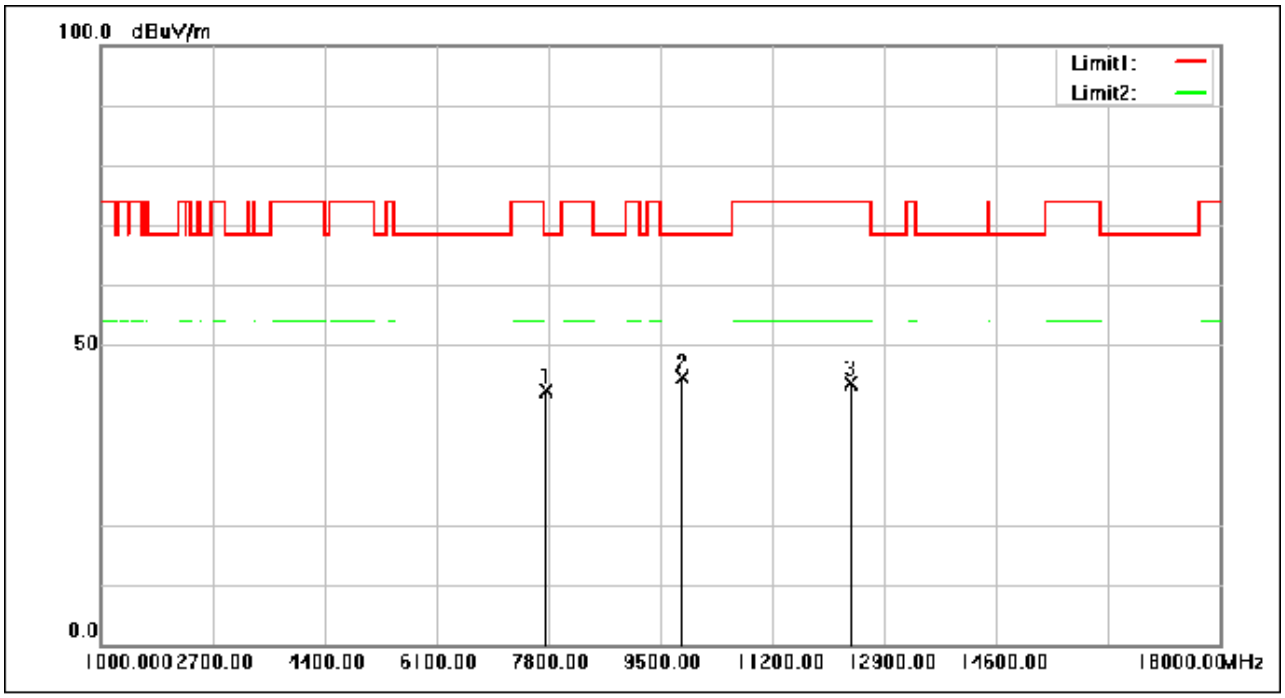


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7771.440	51.95	-9.48	42.47	68.30	-25.83	peak
2	9828.440	51.02	-6.32	44.70	68.30	-23.60	peak
3	12402.240	49.78	-6.05	43.73	74.00	-30.27	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

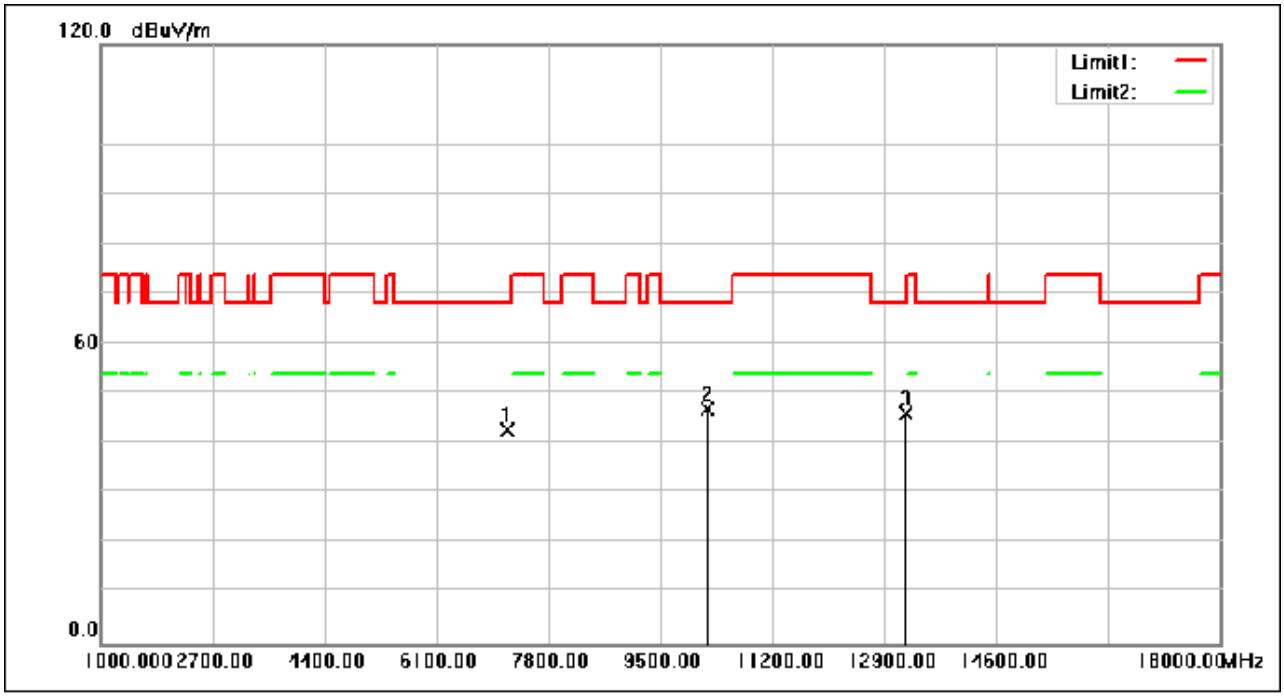


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7177.800	52.44	-9.81	42.63	68.30	-25.67	peak
2	10225.050	53.37	-6.36	47.01	68.30	-21.29	peak
3	13226.400	51.77	-5.58	46.19	68.30	-22.11	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

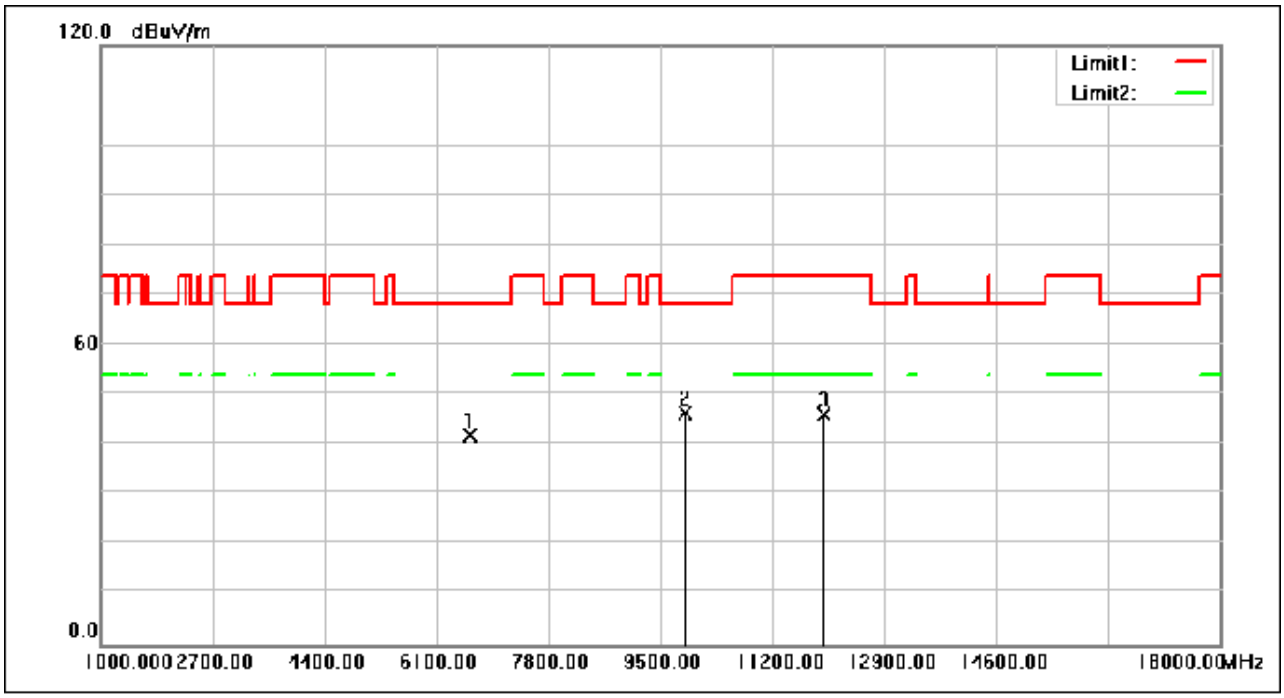


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6610.850	52.32	-10.62	41.70	68.30	-26.60	peak
2	9881.650	52.60	-6.29	46.31	68.30	-21.99	peak
3	11986.250	52.39	-6.39	46.00	74.00	-28.00	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

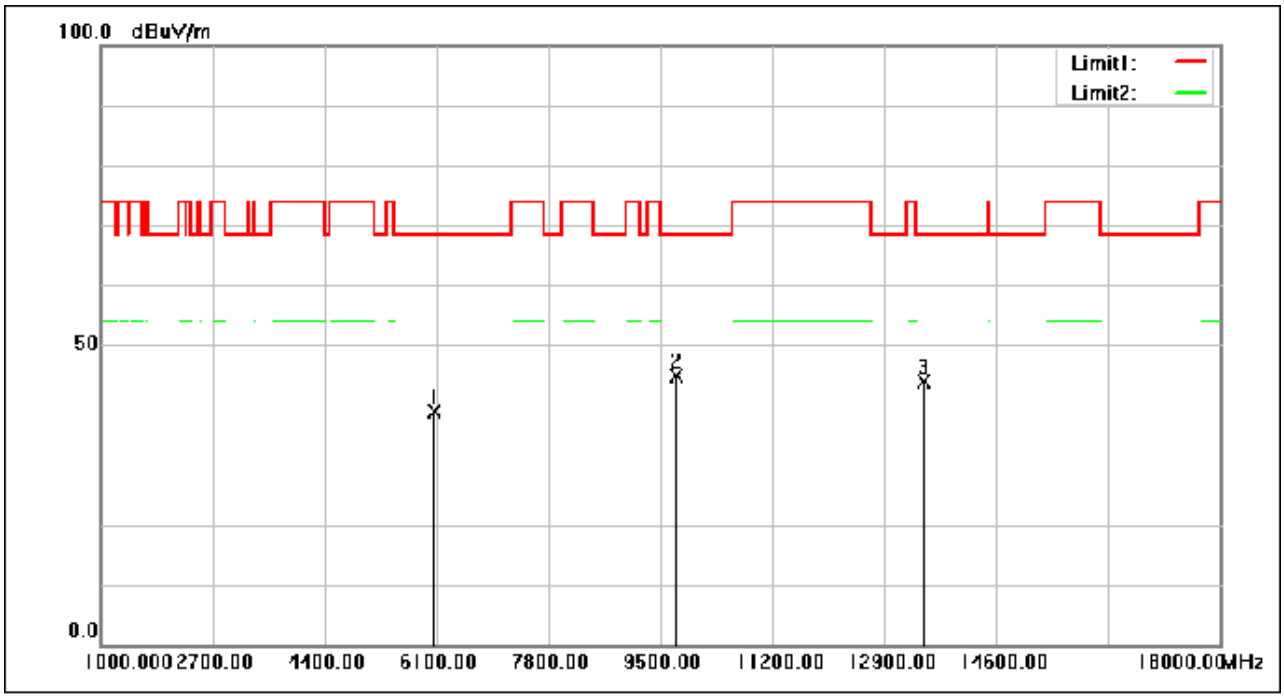


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6082.320	51.66	-12.78	38.88	68.30	-29.42	peak
2	9746.840	51.29	-6.46	44.83	68.30	-23.47	peak
3	13504.520	49.56	-5.74	43.82	68.30	-24.48	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

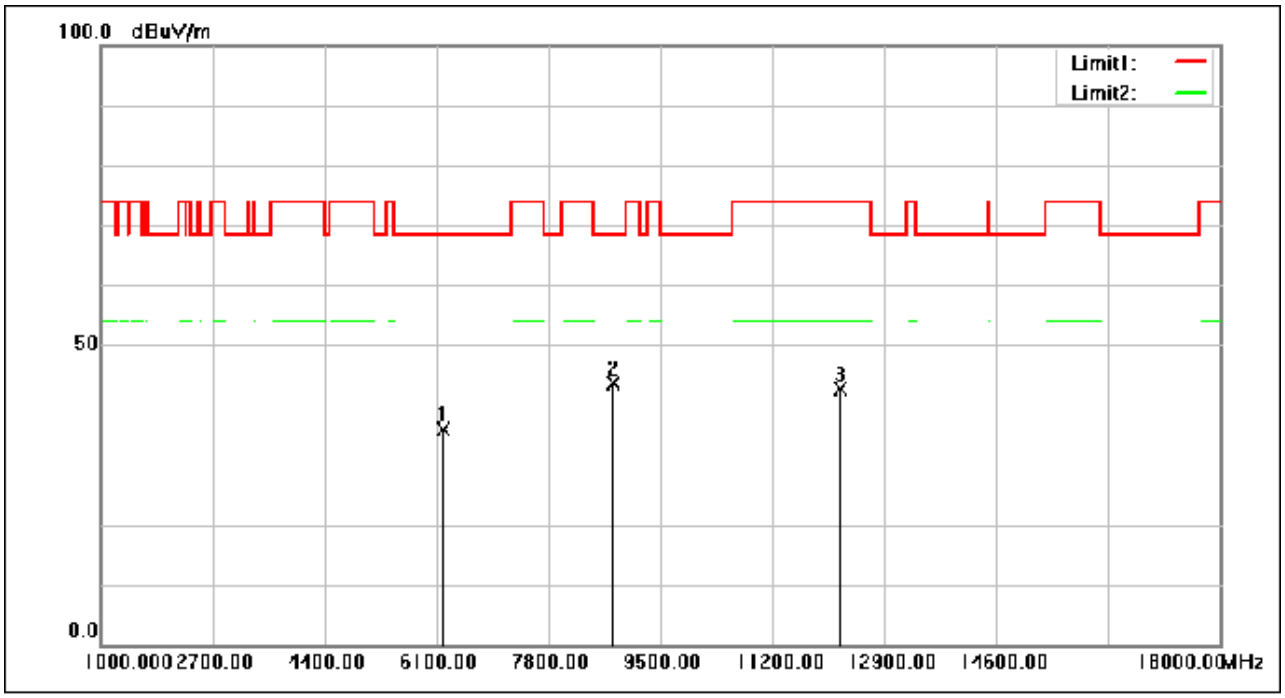


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6204.720	48.29	-12.29	36.00	68.30	-32.30	peak
2	8799.600	51.78	-8.16	43.62	68.30	-24.68	peak
3	12251.280	48.79	-6.17	42.62	74.00	-31.38	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

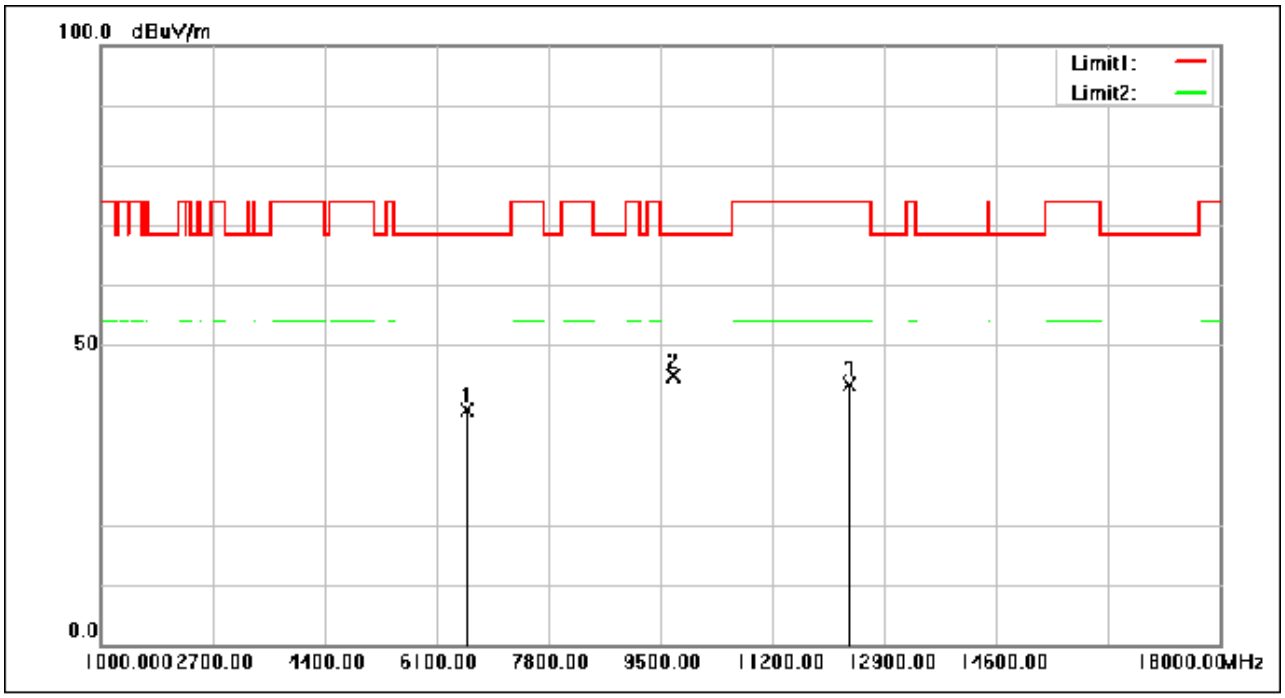


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6562.400	50.00	-10.82	39.18	68.30	-29.12	peak
2	9697.880	51.35	-6.55	44.80	68.30	-23.50	peak
3	12379.800	49.44	-6.06	43.38	74.00	-30.62	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

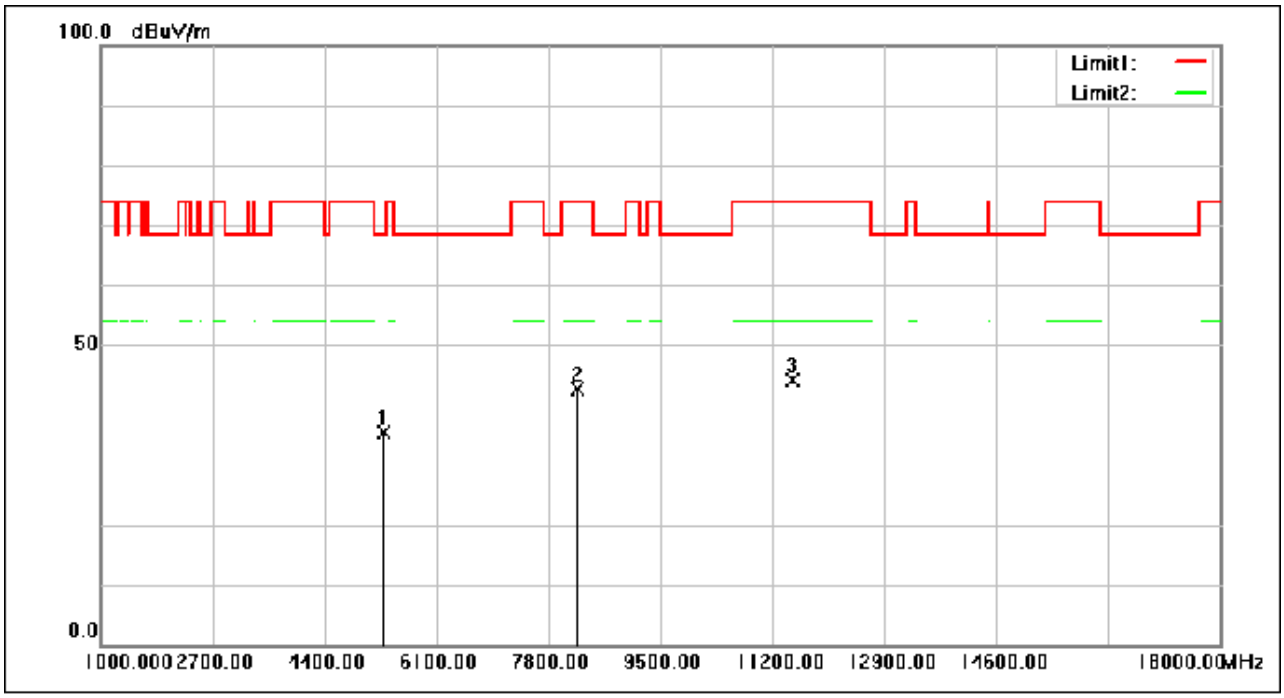


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5311.880	50.92	-15.45	35.47	68.30	-32.83	peak
2	8254.920	51.66	-9.13	42.53	74.00	-31.47	peak
3	11519.600	50.18	-6.07	44.11	74.00	-29.89	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

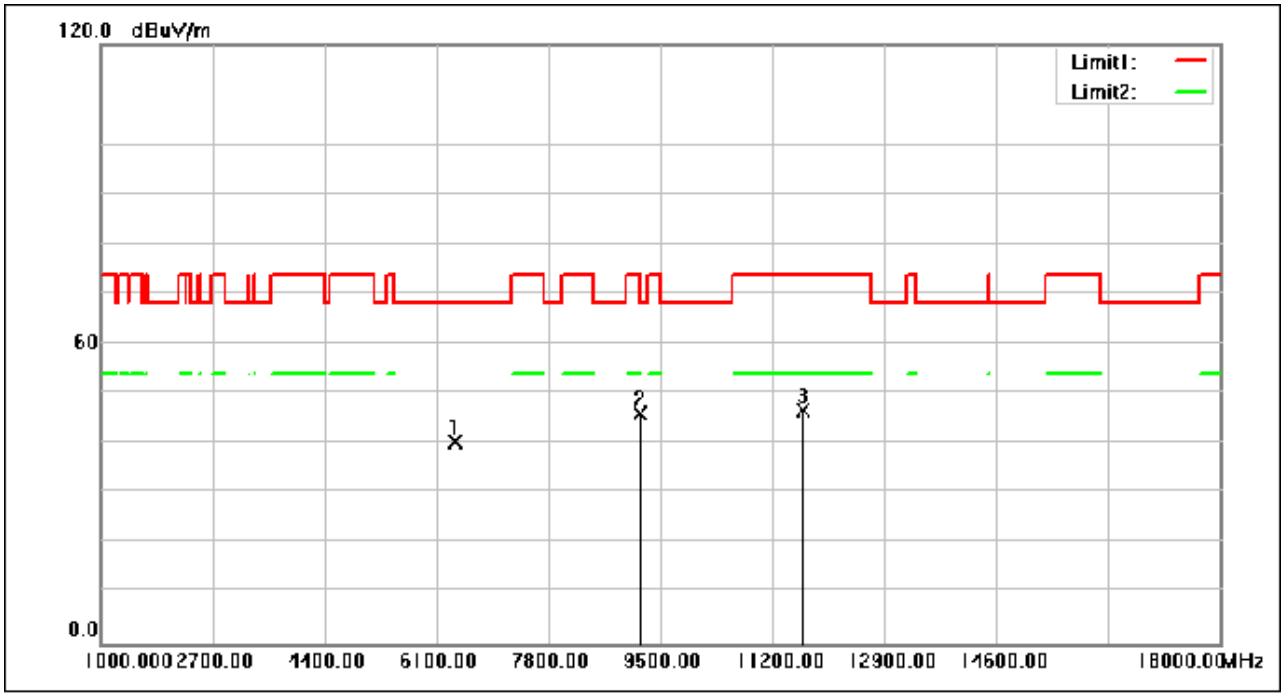


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6399.200	51.91	-11.49	40.42	68.30	-27.88	peak
2	9205.050	53.47	-7.37	46.10	68.30	-22.20	peak
3	11666.650	52.73	-6.19	46.54	74.00	-27.46	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

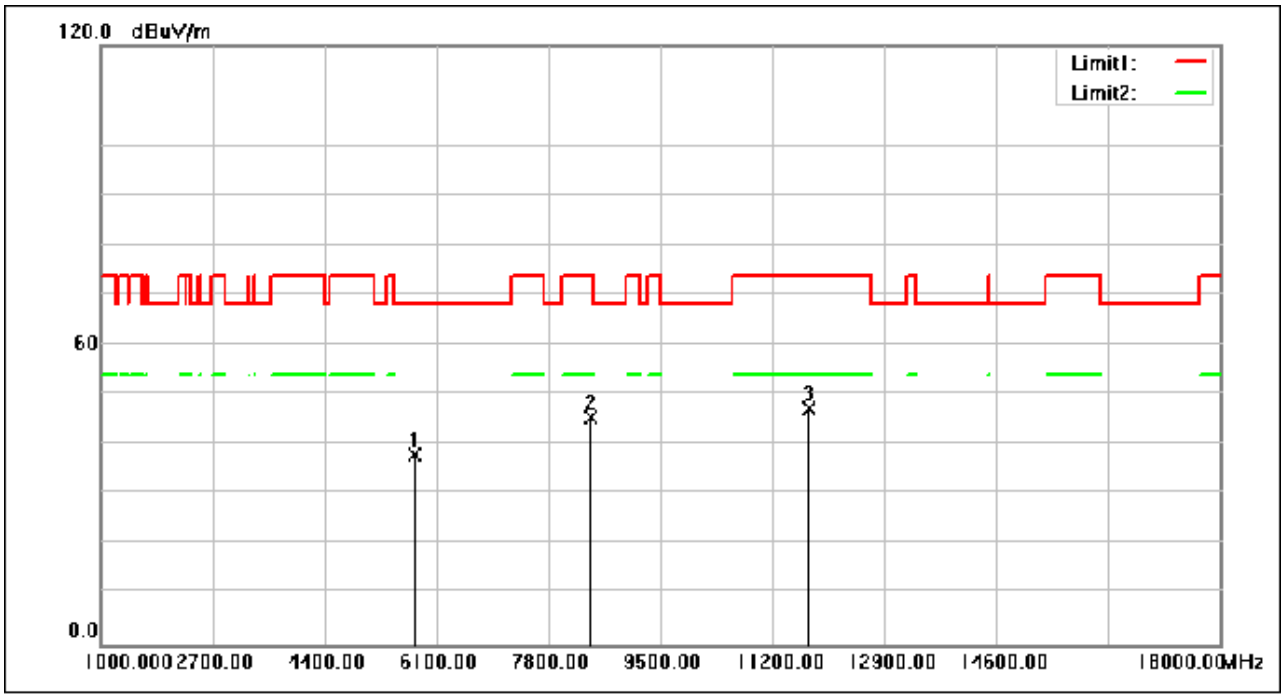


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5777.000	52.39	-14.35	38.04	68.30	-30.26	peak
2	8450.250	54.22	-8.87	45.35	74.00	-28.65	peak
3	11772.050	53.62	-6.27	47.35	74.00	-26.65	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

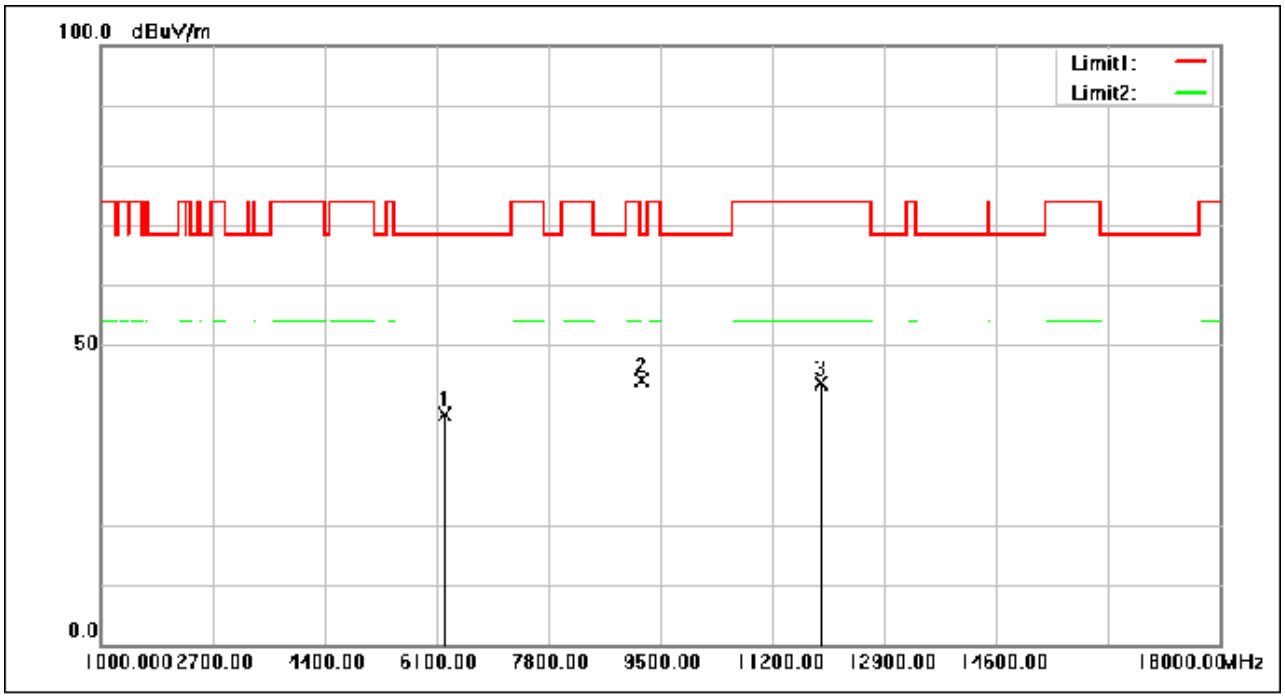


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6234.640	50.65	-12.17	38.48	68.30	-29.82	peak
2	9211.000	51.42	-7.36	44.06	68.30	-24.24	peak
3	11935.080	50.07	-6.39	43.68	74.00	-30.32	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

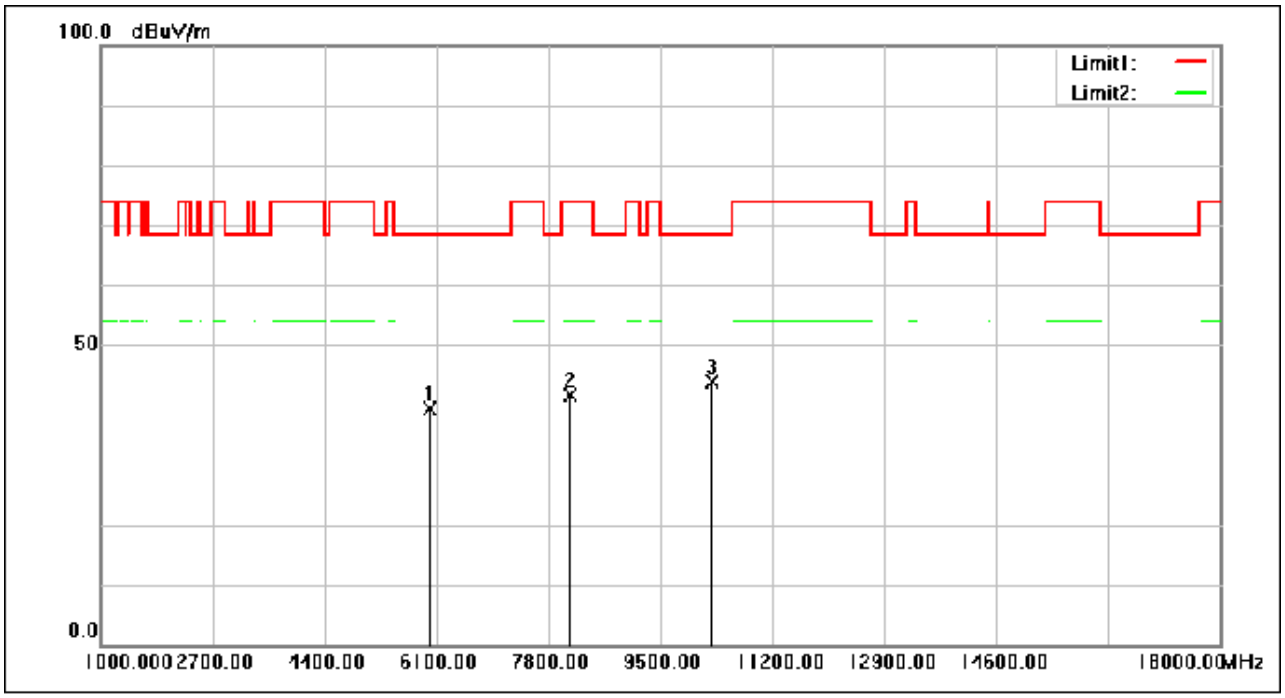


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6006.840	52.51	-13.05	39.46	68.30	-28.84	peak
2	8131.160	50.82	-9.30	41.52	74.00	-32.48	peak
3	10291.520	50.18	-6.36	43.82	68.30	-24.48	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

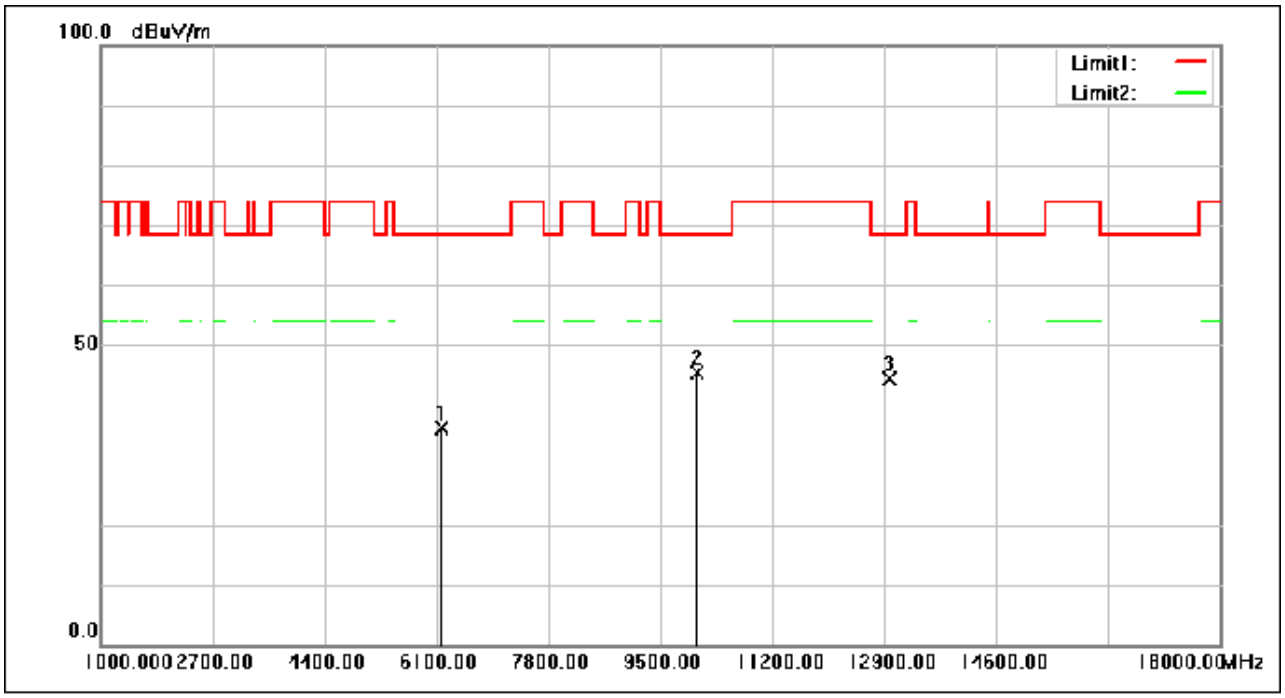


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6201.320	48.31	-12.30	36.01	68.30	-32.29	peak
2	10074.600	51.71	-6.34	45.37	68.30	-22.93	peak
3	12995.880	49.85	-5.54	44.31	68.30	-23.99	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

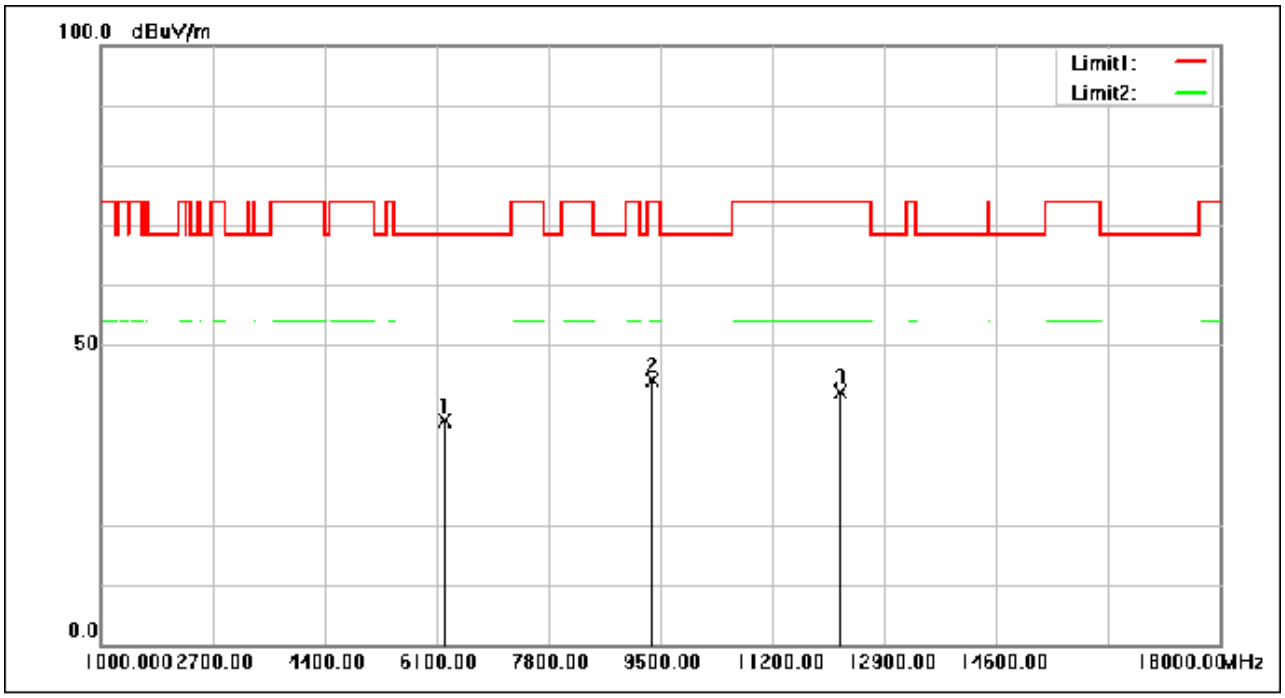


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6232.600	49.46	-12.18	37.28	68.30	-31.02	peak
2	9395.280	51.13	-7.07	44.06	74.00	-29.94	peak
3	12242.440	48.38	-6.18	42.20	74.00	-31.80	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

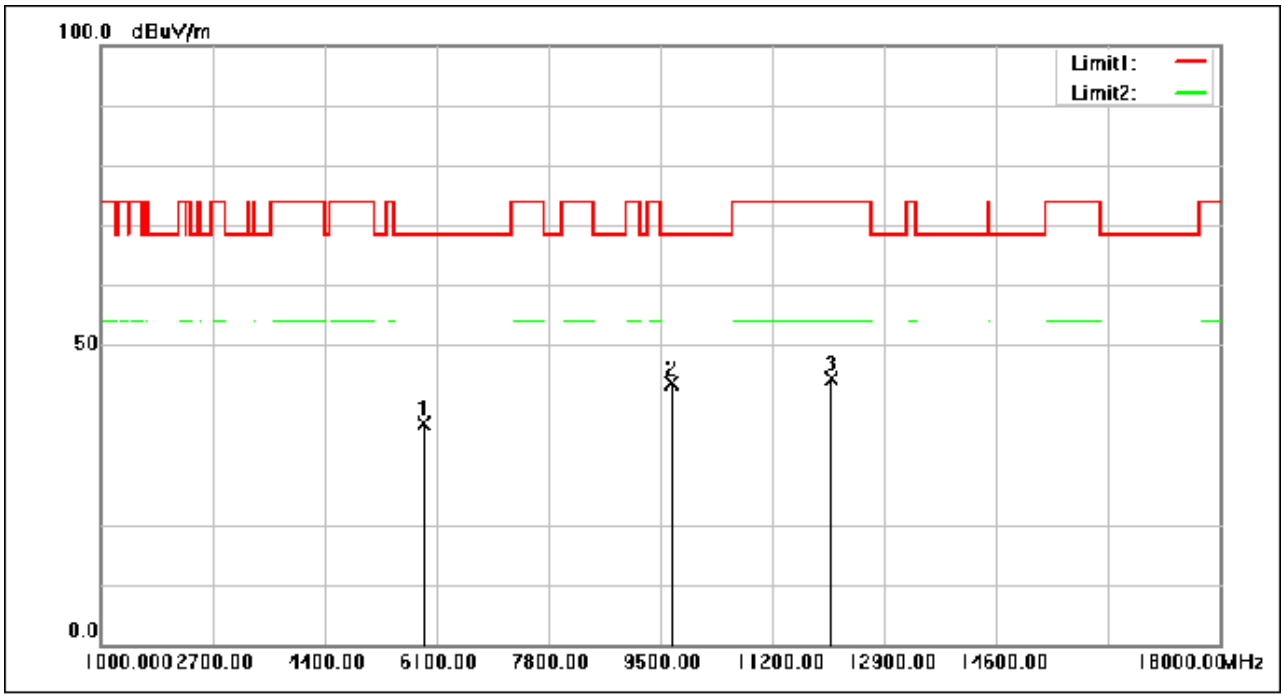


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5926.600	50.53	-13.55	36.98	68.30	-31.32	peak
2	9676.120	50.30	-6.59	43.71	68.30	-24.59	peak
3	12110.520	50.77	-6.30	44.47	74.00	-29.53	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

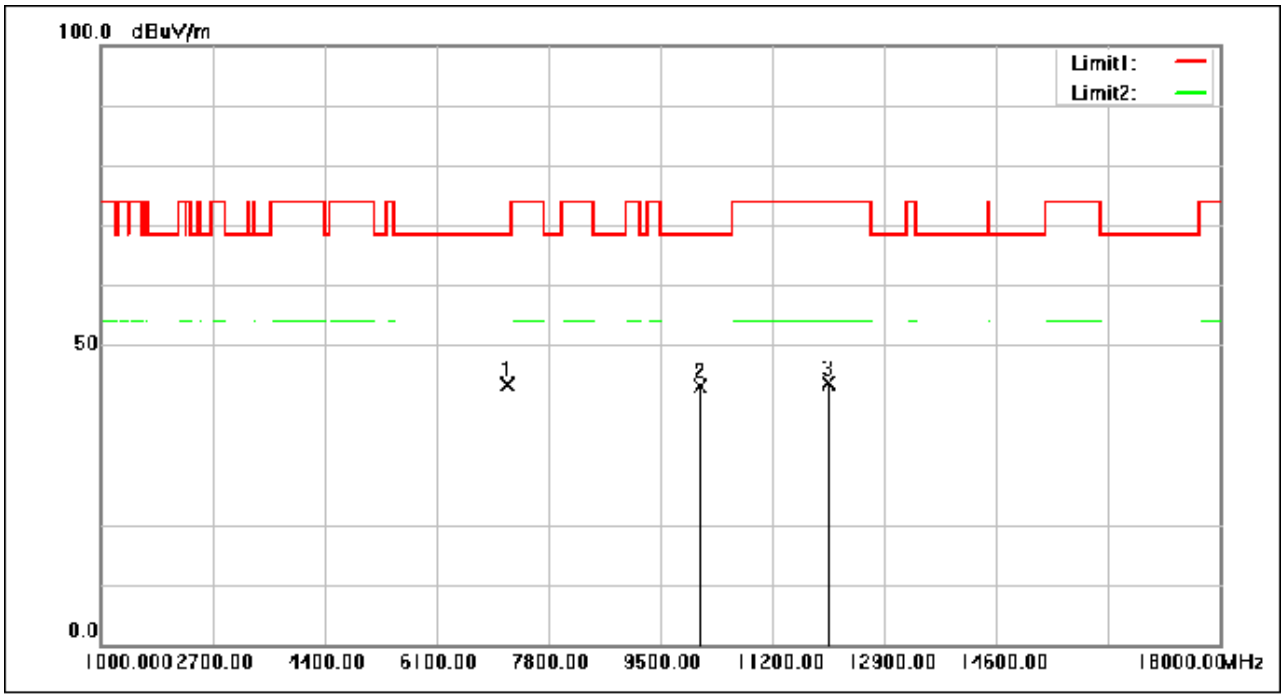


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7174.400	53.10	-9.82	43.28	68.30	-25.02	peak
2	10106.560	49.46	-6.34	43.12	68.30	-25.18	peak
3	12054.080	50.01	-6.34	43.67	74.00	-30.33	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

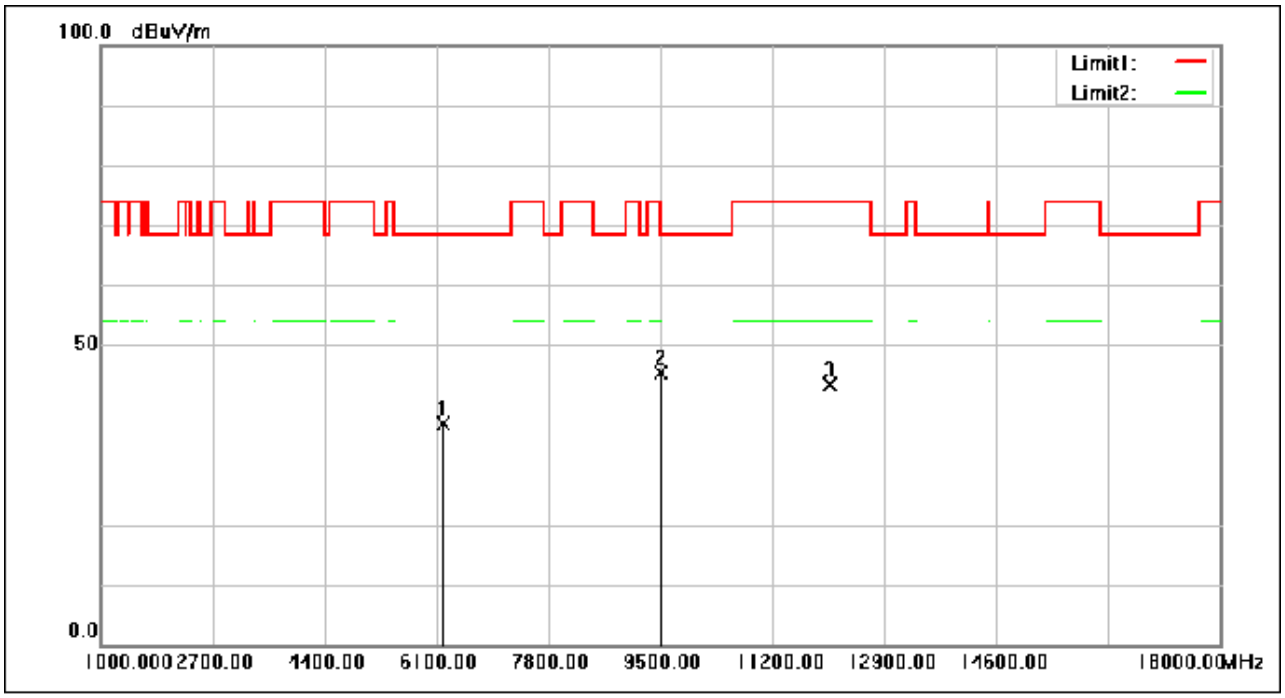


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6217.640	49.23	-12.24	36.99	68.30	-31.31	peak
2	9528.560	52.27	-6.86	45.41	68.30	-22.89	peak
3	12073.120	49.67	-6.33	43.34	74.00	-30.66	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

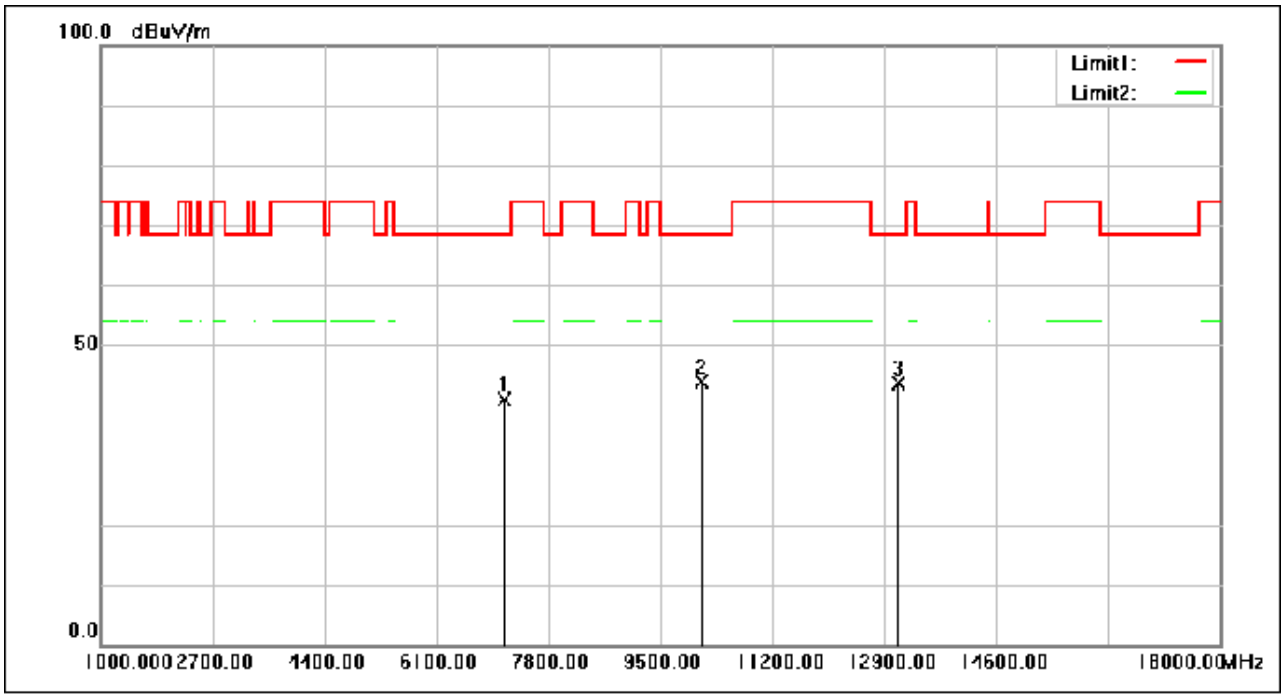


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7143.120	50.72	-9.84	40.88	68.30	-27.42	peak
2	10145.320	50.31	-6.35	43.96	68.30	-24.34	peak
3	13122.360	49.03	-5.52	43.51	68.30	-24.79	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

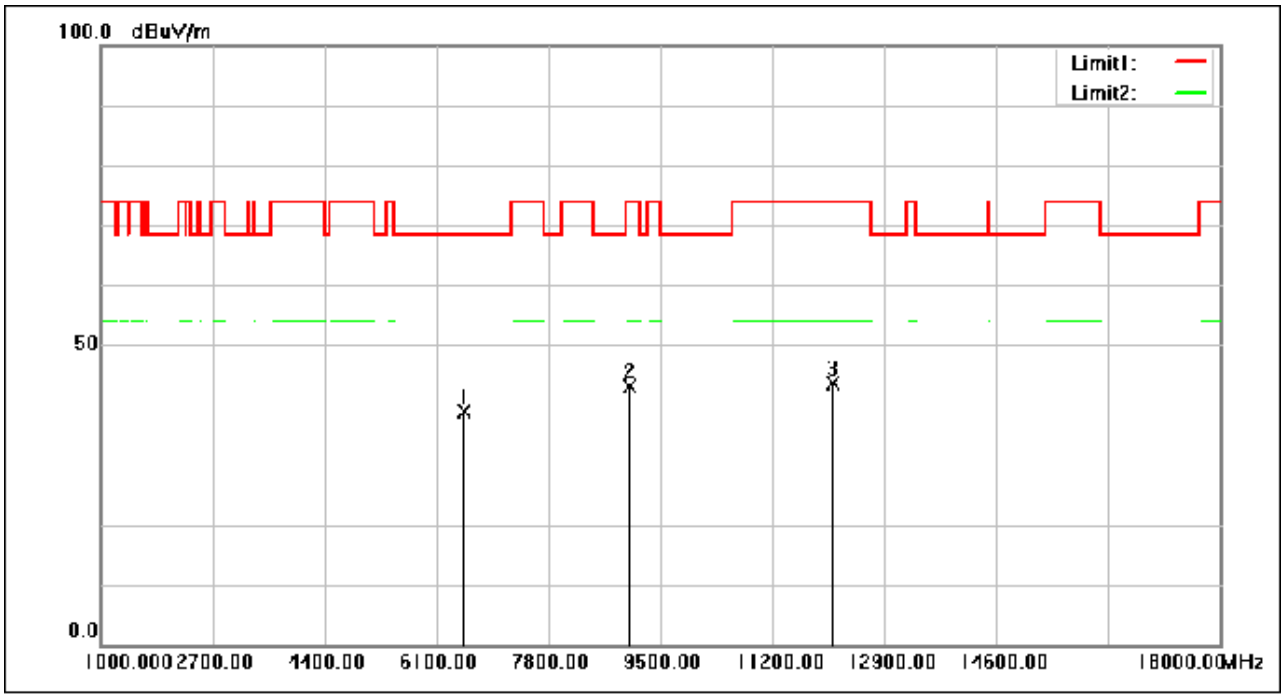


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6533.840	49.78	-10.94	38.84	68.30	-29.46	peak
2	9053.240	50.64	-7.61	43.03	74.00	-30.97	peak
3	12132.280	49.90	-6.27	43.63	74.00	-30.37	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

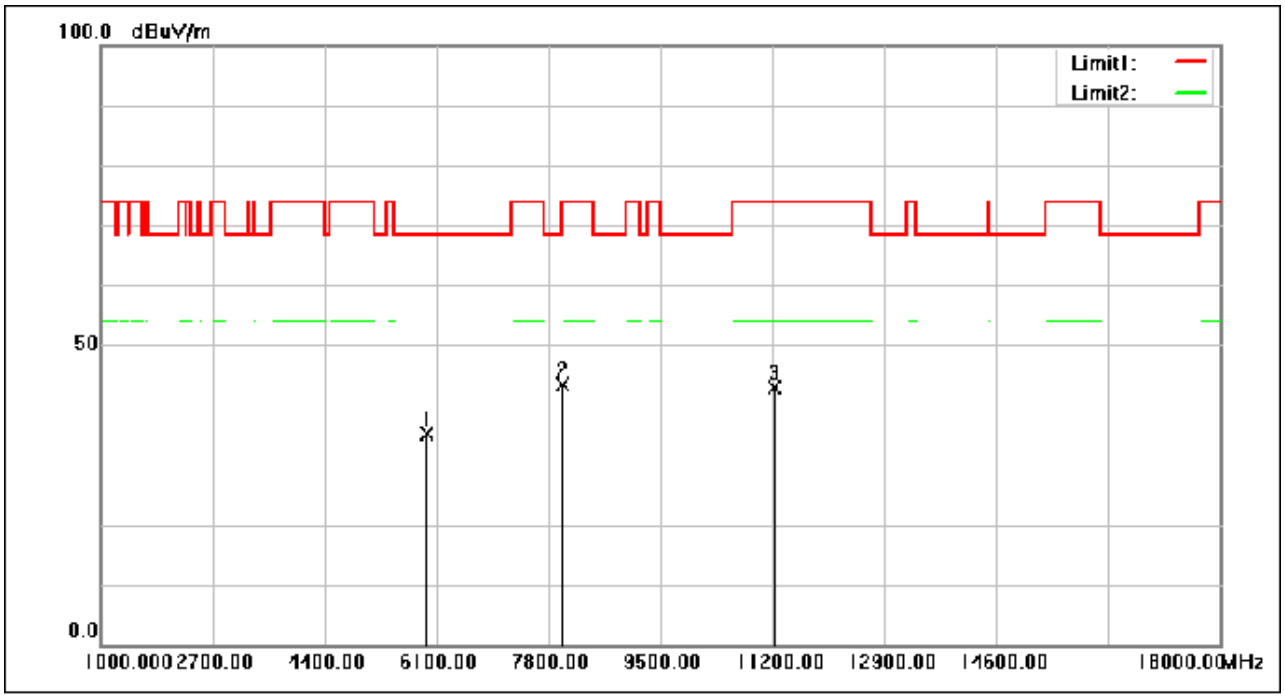


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5947.680	48.44	-13.41	35.03	68.30	-33.27	peak
2	8029.840	52.88	-9.46	43.42	74.00	-30.58	peak
3	11236.720	49.21	-6.22	42.99	74.00	-31.01	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

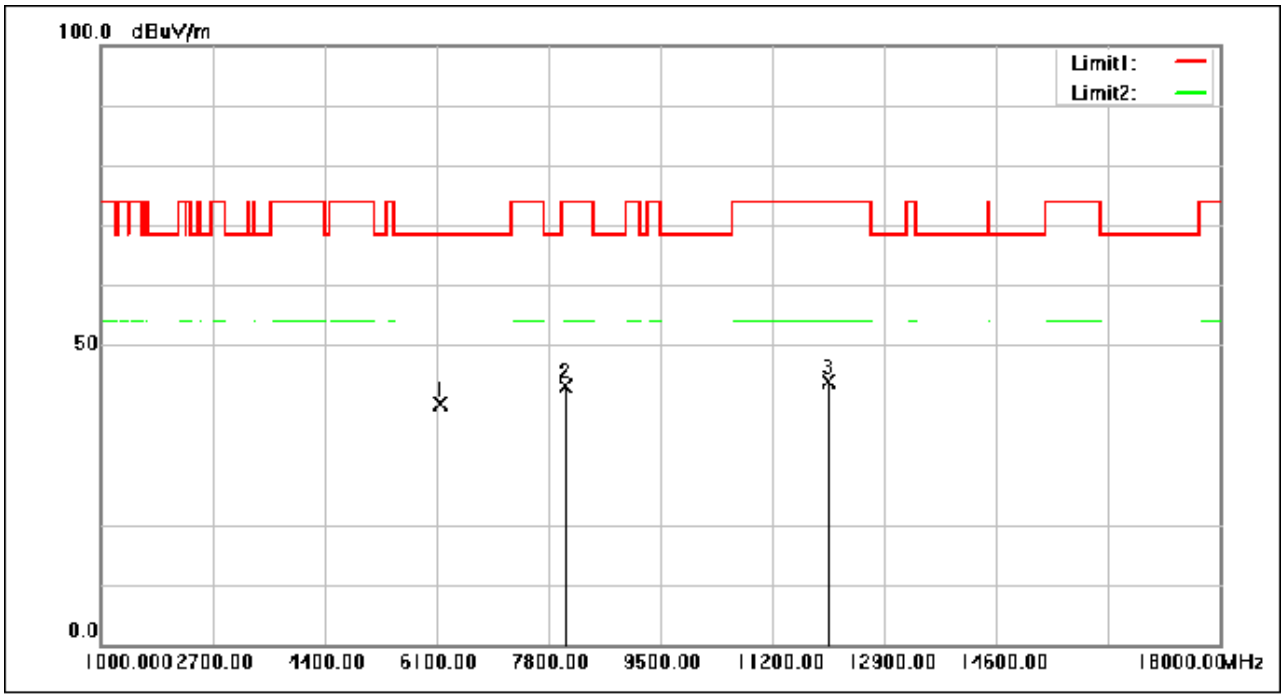


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6159.840	52.71	-12.48	40.23	68.30	-28.07	peak
2	8065.880	52.43	-9.40	43.03	74.00	-30.97	peak
3	12066.320	50.32	-6.33	43.99	74.00	-30.01	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

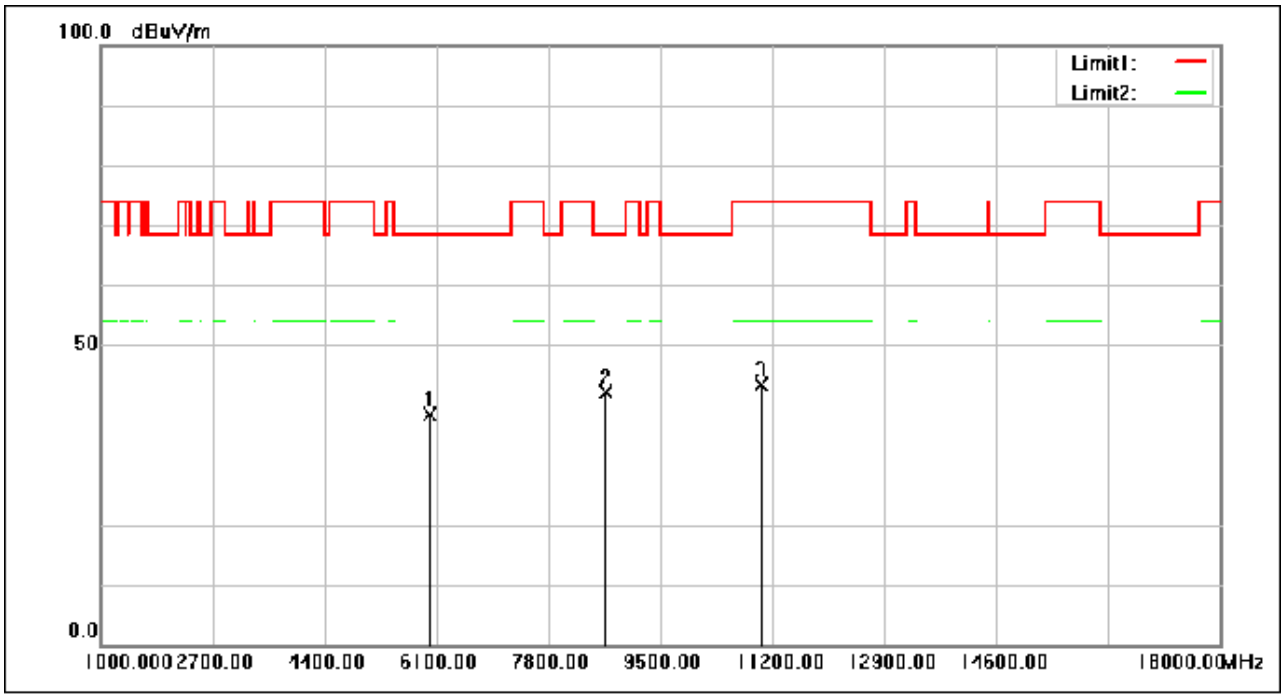


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6014.320	51.38	-13.03	38.35	68.30	-29.95	peak
2	8669.720	50.44	-8.43	42.01	68.30	-26.29	peak
3	11037.480	49.79	-6.34	43.45	74.00	-30.55	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

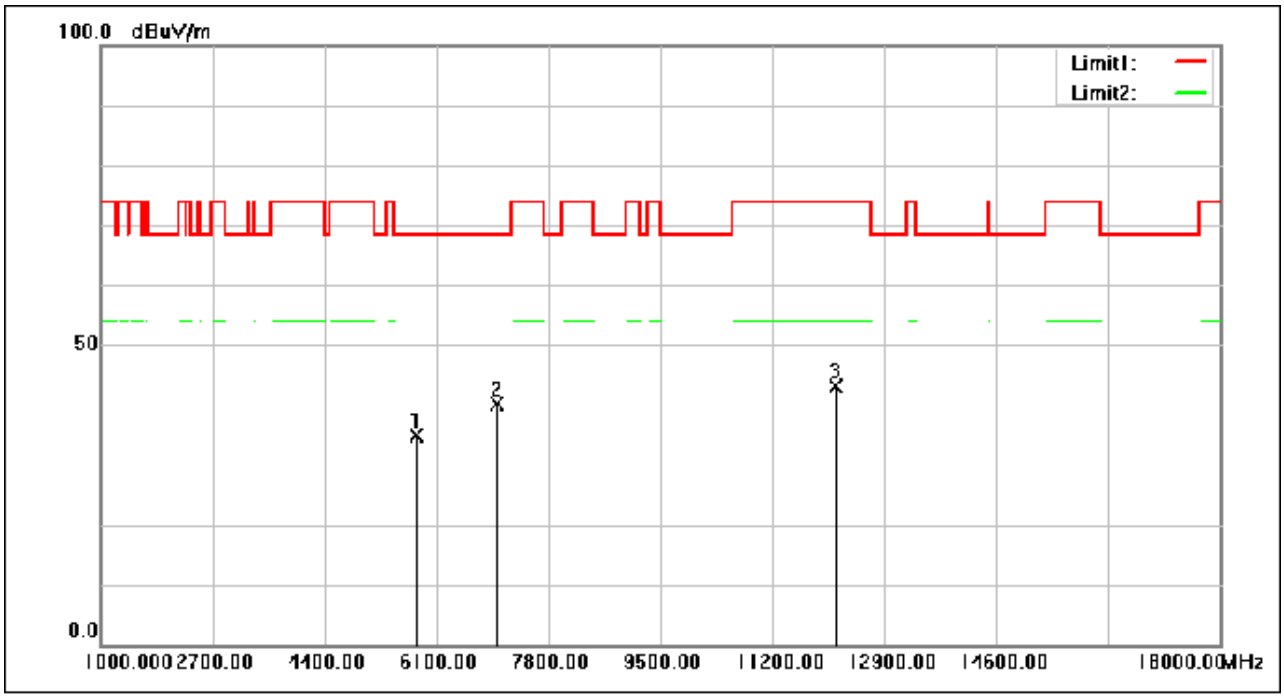


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5802.840	49.20	-14.24	34.96	68.30	-33.34	peak
2	7026.840	50.13	-9.94	40.19	68.30	-28.11	peak
3	12179.200	49.39	-6.23	43.16	74.00	-30.84	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

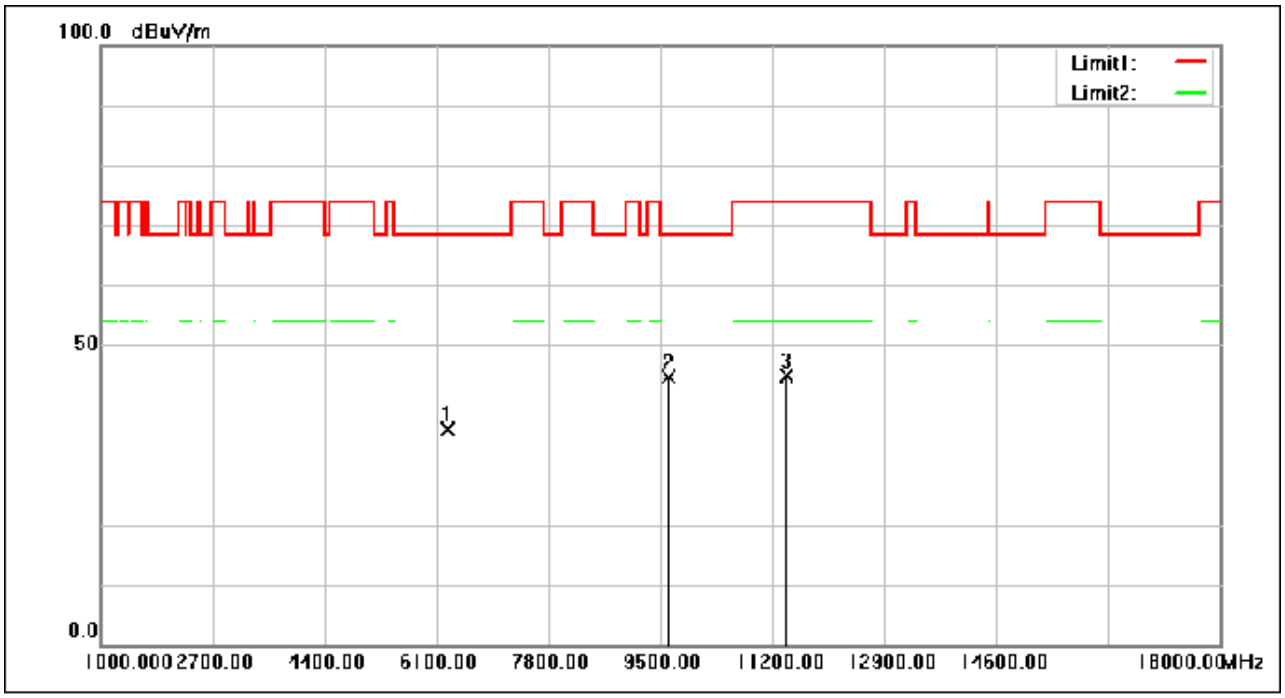


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6277.480	47.78	-11.99	35.79	68.30	-32.51	peak
2	9619.000	51.31	-6.69	44.62	68.30	-23.68	peak
3	11426.440	51.06	-6.10	44.96	74.00	-29.04	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

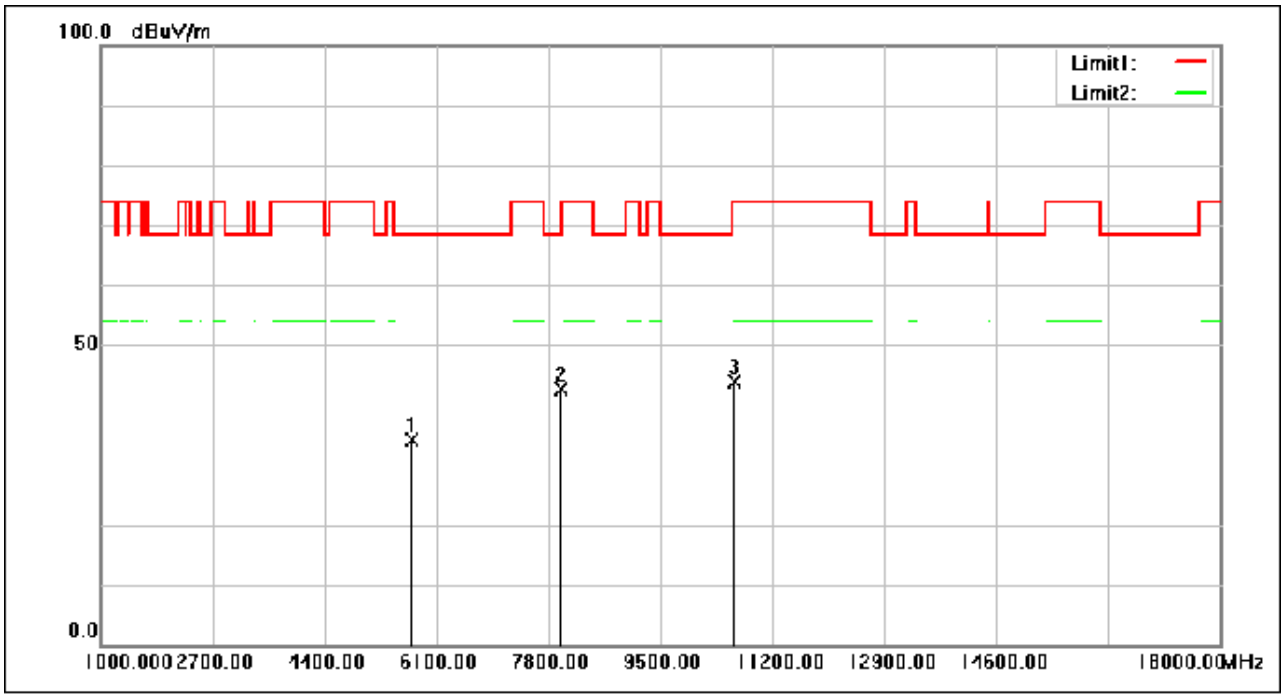


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5726.680	48.77	-14.58	34.19	68.30	-34.11	peak
2	7995.160	52.22	-9.50	42.72	68.30	-25.58	peak
3	10632.200	50.24	-6.38	43.86	74.00	-30.14	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

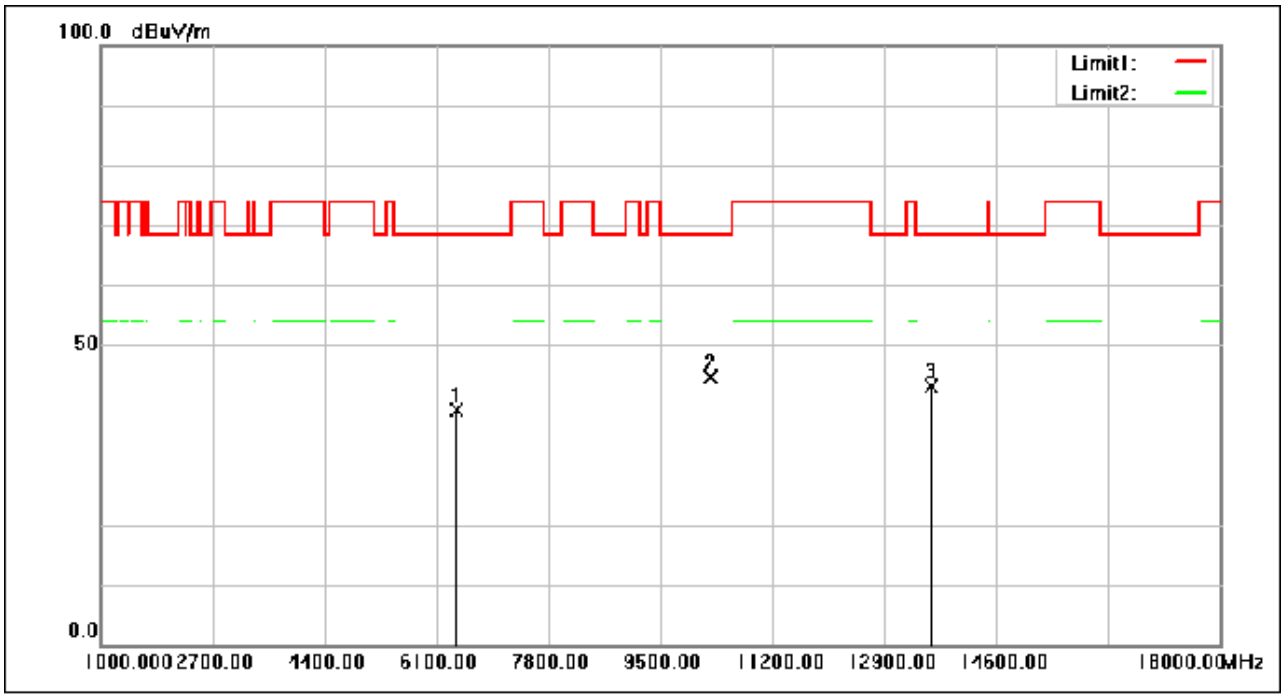


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6408.040	50.54	-11.45	39.09	68.30	-29.21	peak
2	10265.000	51.00	-6.36	44.64	68.30	-23.66	peak
3	13620.120	49.02	-5.88	43.14	68.30	-25.16	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

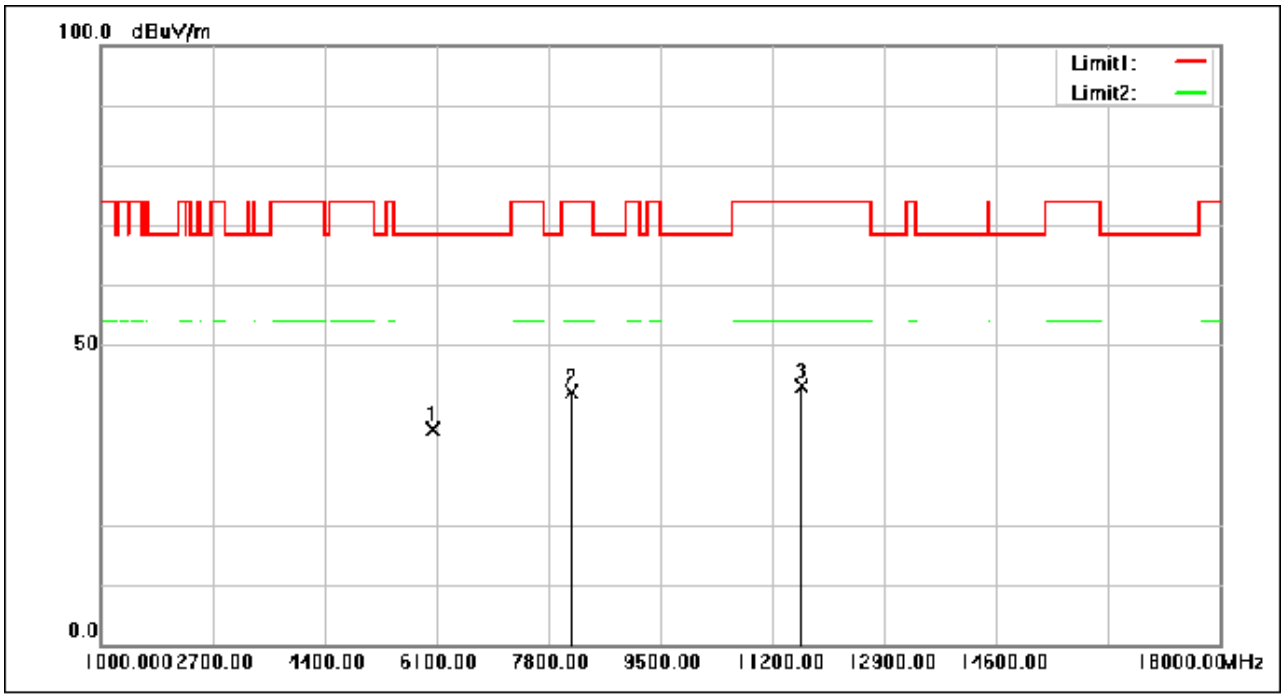


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6061.920	48.84	-12.85	35.99	68.30	-32.31	peak
2	8158.360	51.32	-9.27	42.05	74.00	-31.95	peak
3	11642.680	49.25	-6.18	43.07	74.00	-30.93	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

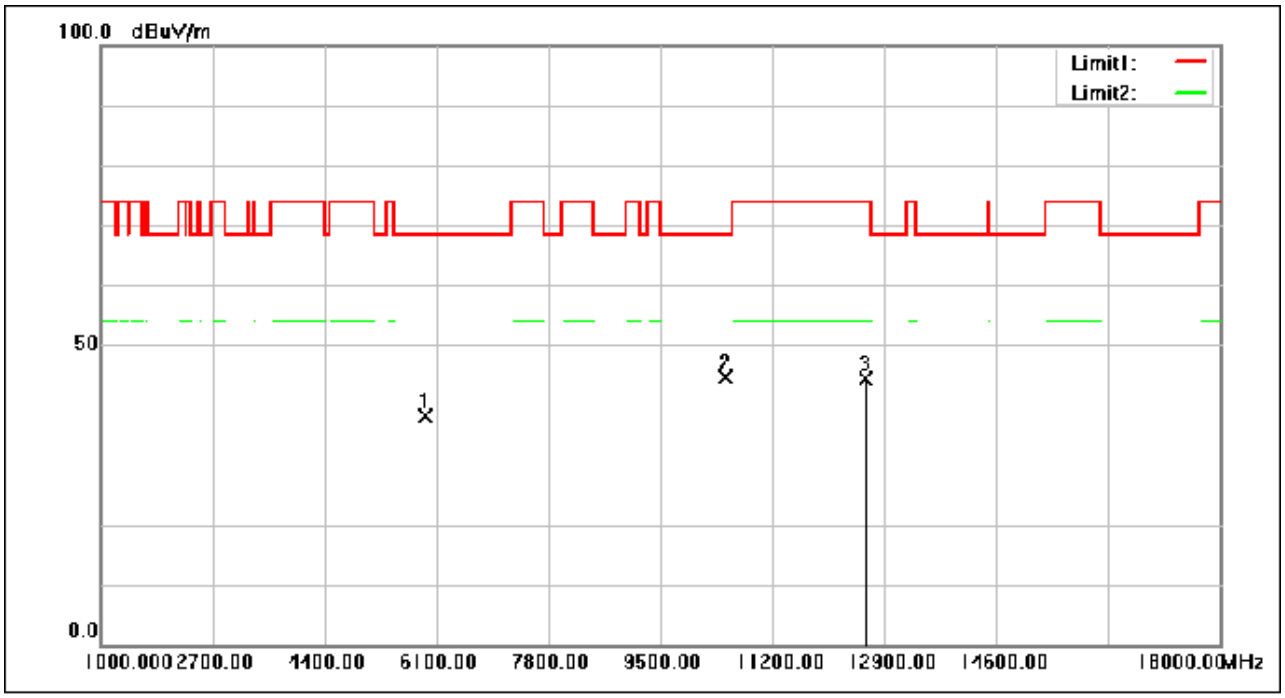


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5937.480	51.62	-13.48	38.14	68.30	-30.16	peak
2	10498.920	51.09	-6.39	44.70	68.30	-23.60	peak
3	12615.760	50.20	-5.87	44.33	74.00	-29.67	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

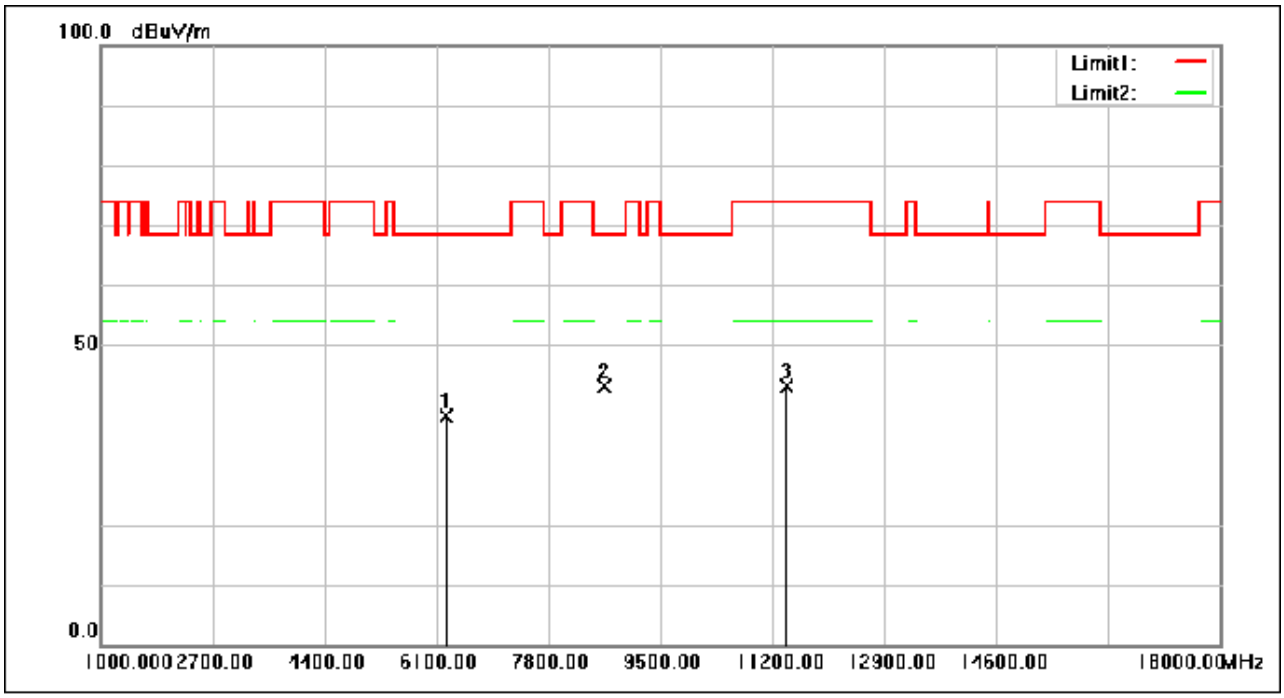


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6263.200	50.16	-12.05	38.11	68.30	-30.19	peak
2	8663.600	51.63	-8.45	43.18	68.30	-25.12	peak
3	11428.480	49.35	-6.11	43.24	74.00	-30.76	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

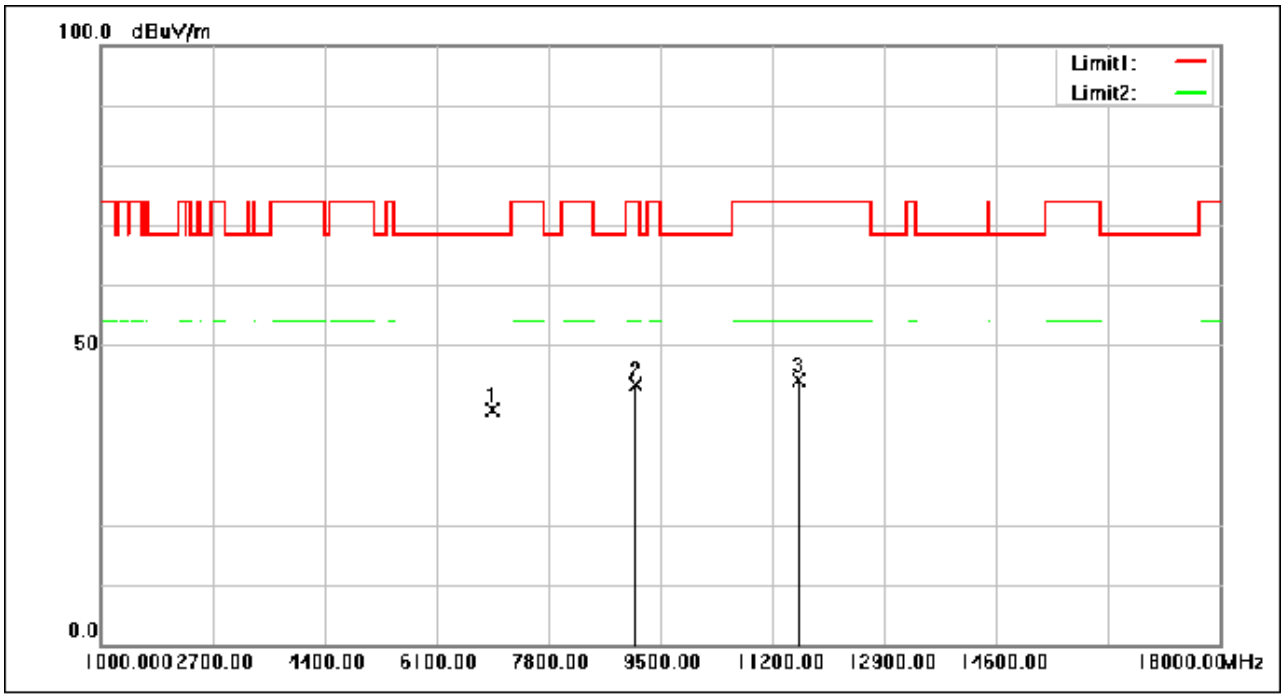


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6950.000	49.01	-10.00	39.01	68.30	-29.29	peak
2	9138.920	50.89	-7.48	43.41	74.00	-30.59	peak
3	11595.760	50.25	-6.14	44.11	74.00	-29.89	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

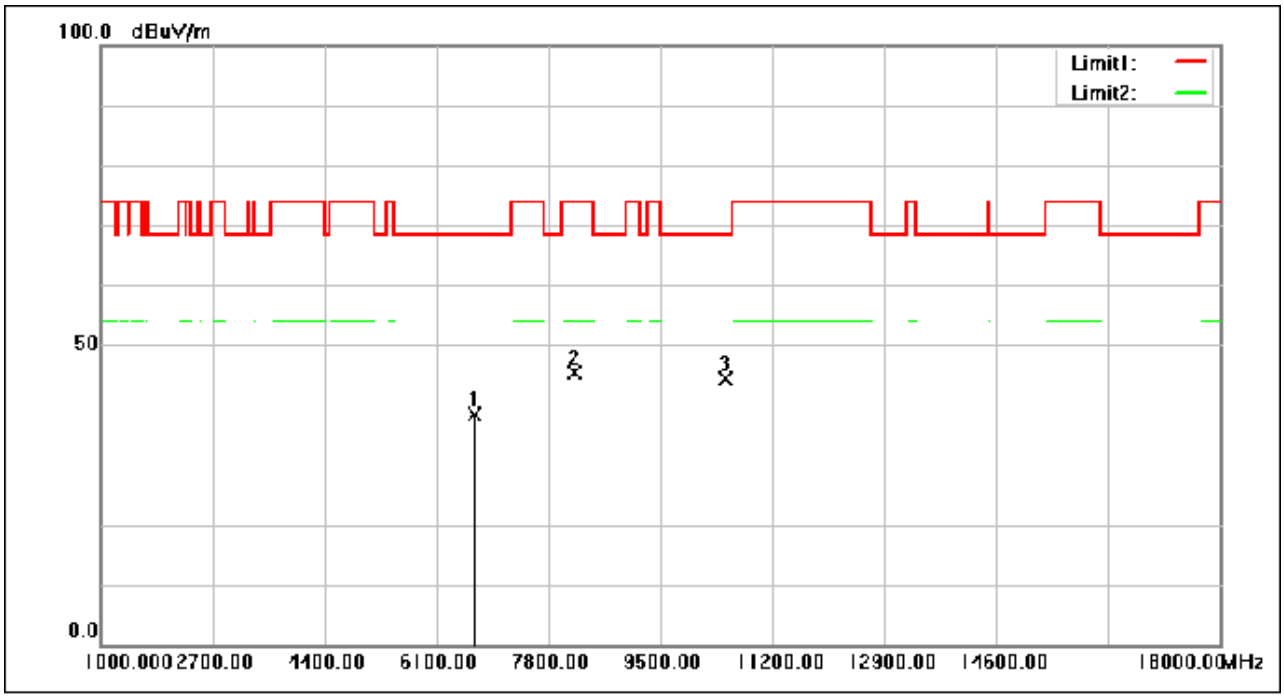


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6691.600	48.58	-10.29	38.29	68.30	-30.01	peak
2	8191.680	54.52	-9.22	45.30	74.00	-28.70	peak
3	10501.640	50.66	-6.39	44.27	68.30	-24.03	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

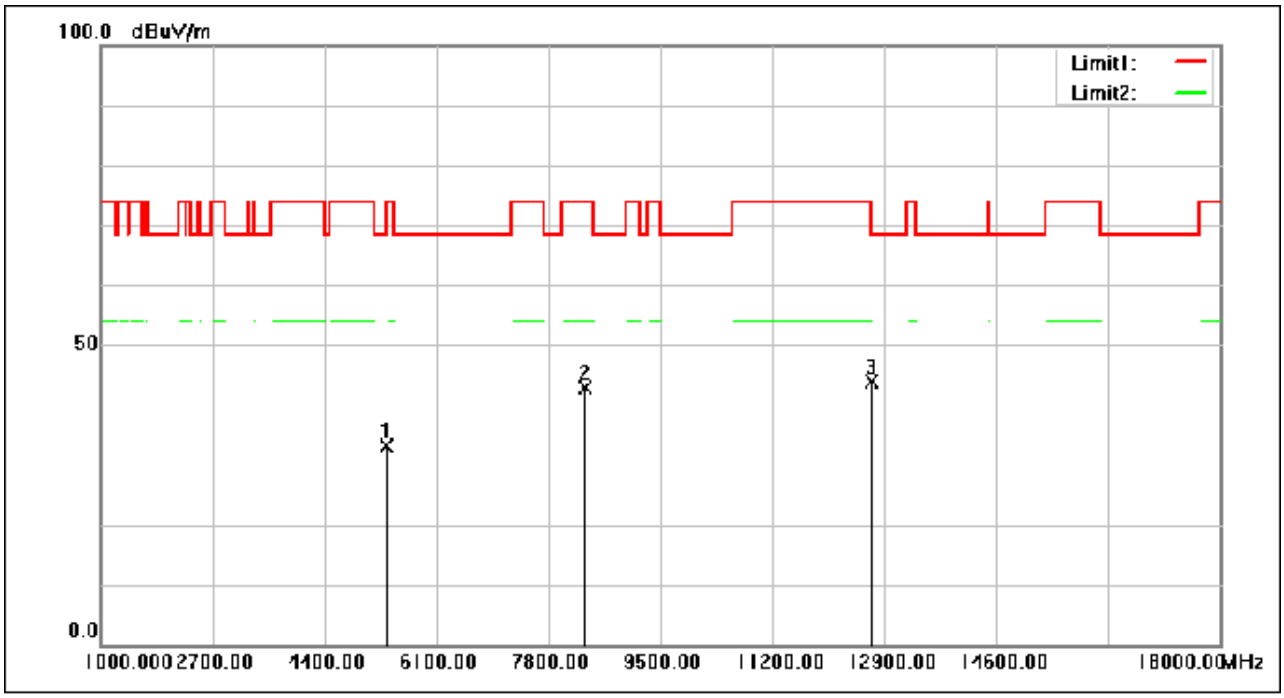


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5339.760	48.67	-15.48	33.19	68.30	-35.11	peak
2	8373.240	51.85	-8.97	42.88	74.00	-31.12	peak
3	12721.840	49.63	-5.78	43.85	68.30	-24.45	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

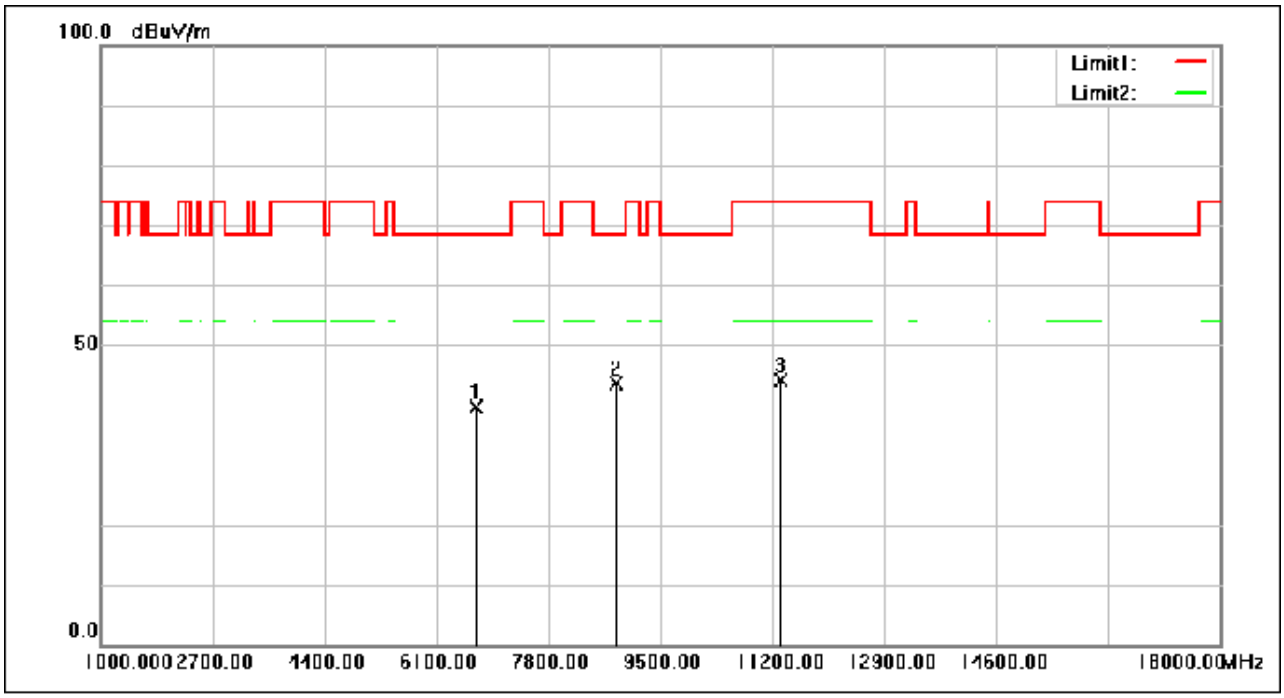


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6696.360	49.96	-10.27	39.69	68.30	-28.61	peak
2	8837.000	51.74	-8.08	43.66	68.30	-24.64	peak
3	11319.000	50.24	-6.16	44.08	74.00	-29.92	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

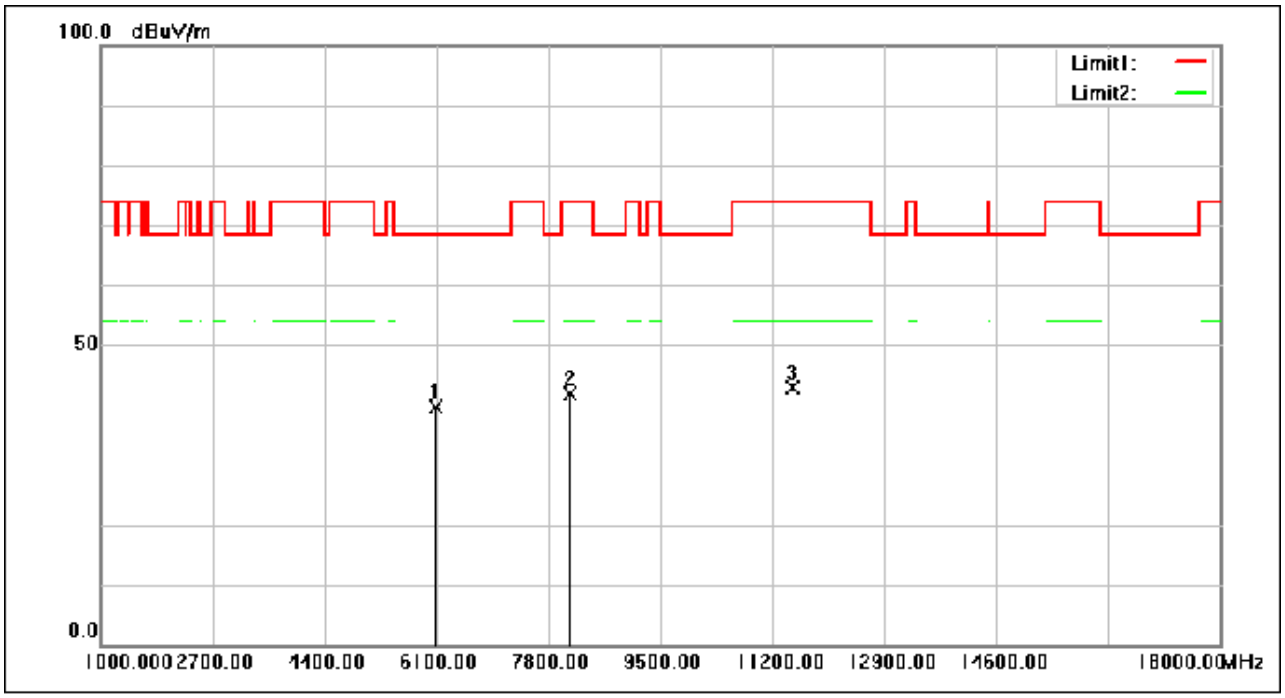


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6084.360	52.32	-12.77	39.55	68.30	-28.75	peak
2	8131.160	51.27	-9.30	41.97	74.00	-32.03	peak
3	11506.000	48.90	-6.06	42.84	74.00	-31.16	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

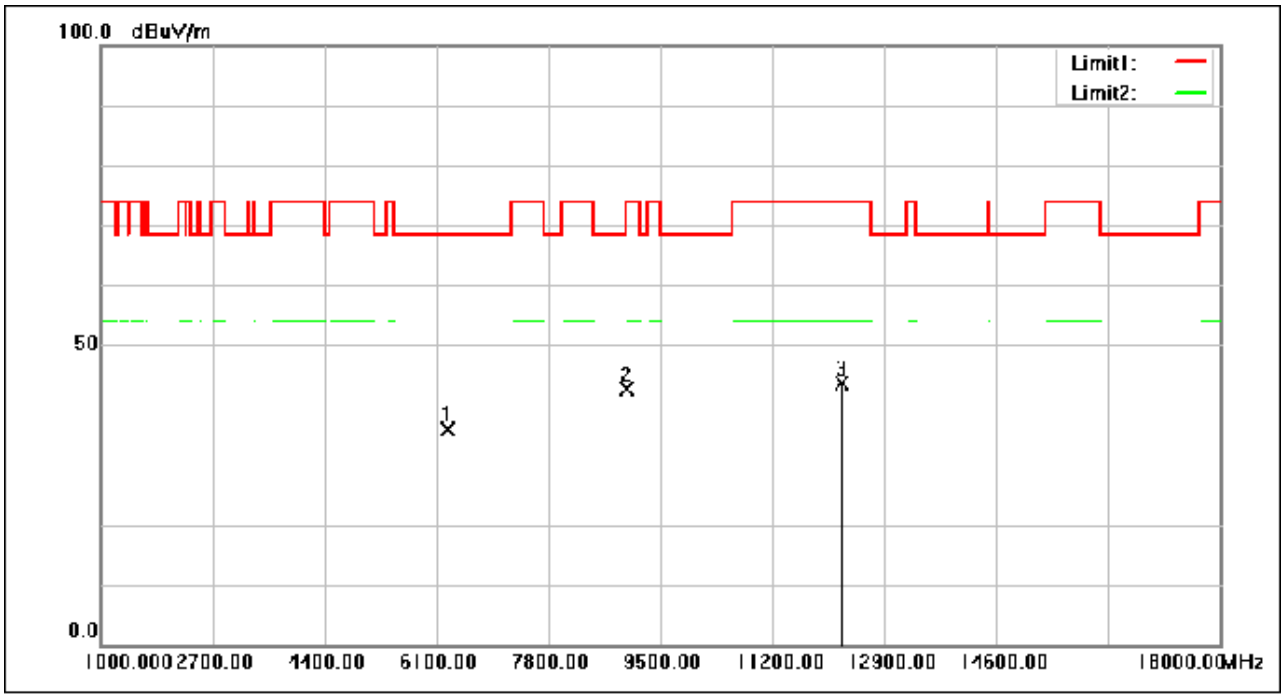


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6278.160	47.88	-11.99	35.89	68.30	-32.41	peak
2	8999.520	50.32	-7.70	42.62	68.30	-25.68	peak
3	12260.120	49.91	-6.17	43.74	74.00	-30.26	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

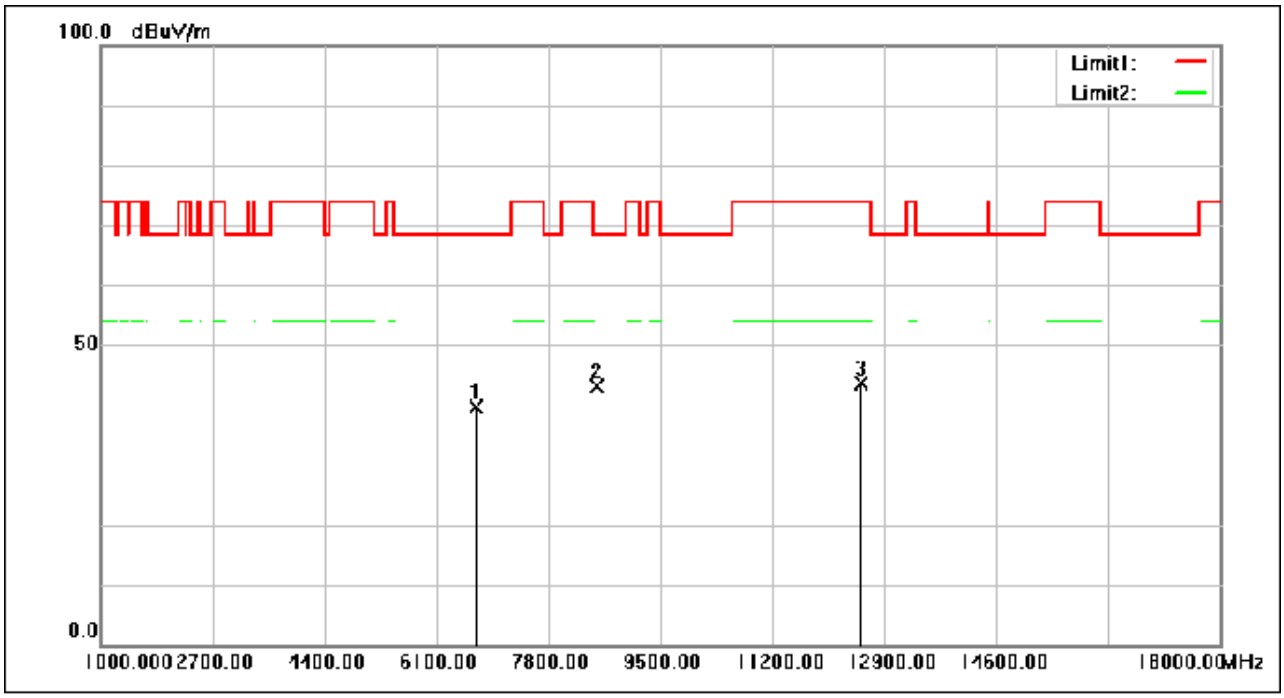


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6703.840	49.90	-10.24	39.66	68.30	-28.64	peak
2	8542.560	51.97	-8.72	43.25	68.30	-25.05	peak
3	12553.880	49.62	-5.92	43.70	74.00	-30.30	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

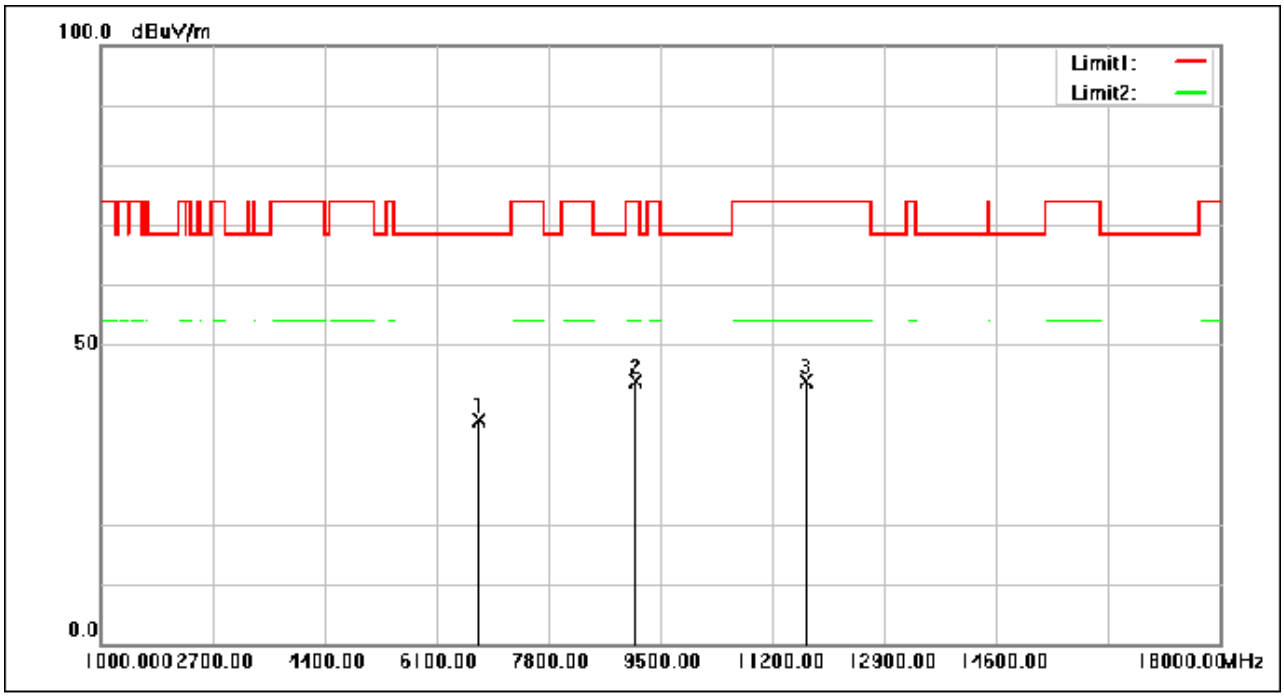


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6761.640	47.50	-10.12	37.38	68.30	-30.92	peak
2	9138.920	51.35	-7.48	43.87	74.00	-30.13	peak
3	11722.240	50.05	-6.23	43.82	74.00	-30.18	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

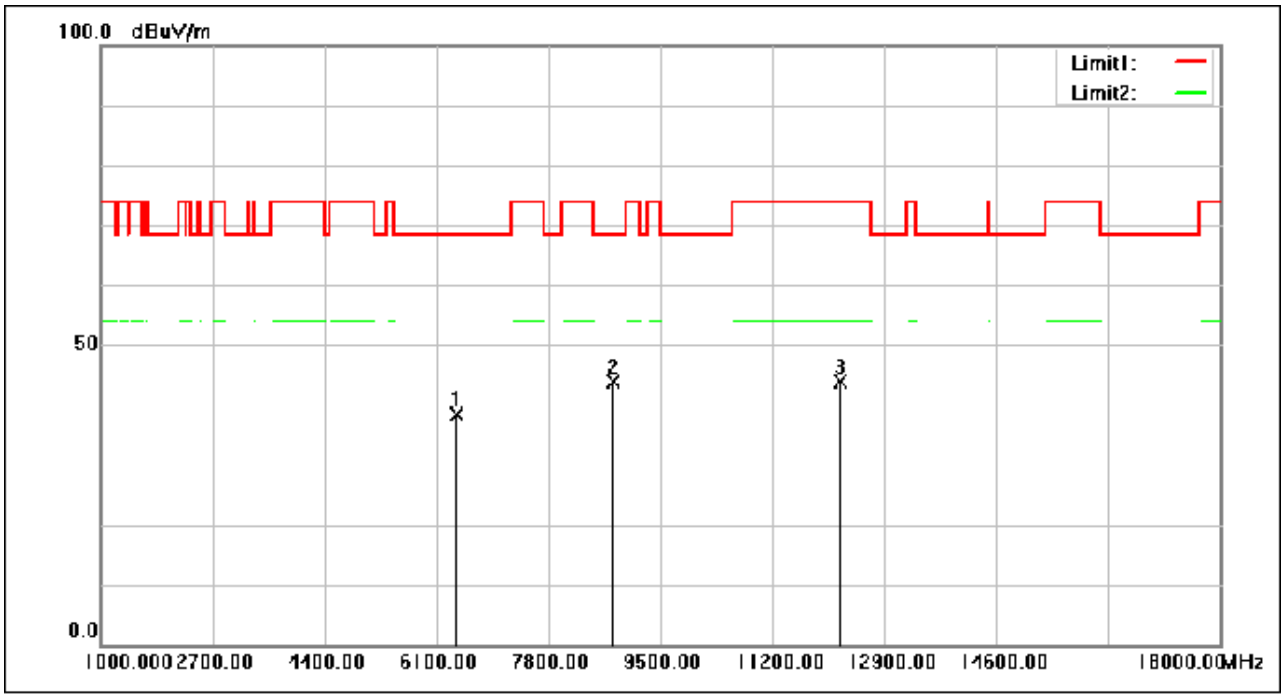


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6406.680	49.87	-11.46	38.41	68.30	-29.89	peak
2	8800.960	52.02	-8.16	43.86	68.30	-24.44	peak
3	12245.840	49.99	-6.18	43.81	74.00	-30.19	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

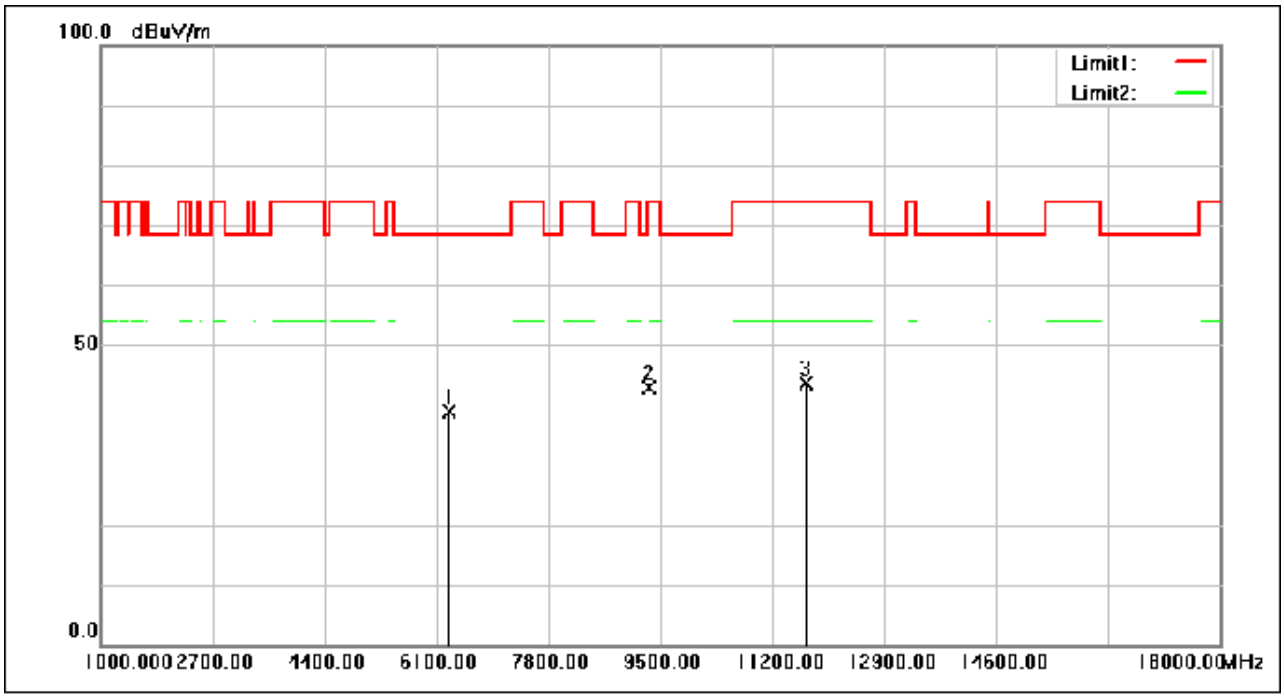


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6301.960	50.69	-11.89	38.80	68.30	-29.50	peak
2	9344.280	50.07	-7.15	42.92	74.00	-31.08	peak
3	11719.520	49.75	-6.23	43.52	74.00	-30.48	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

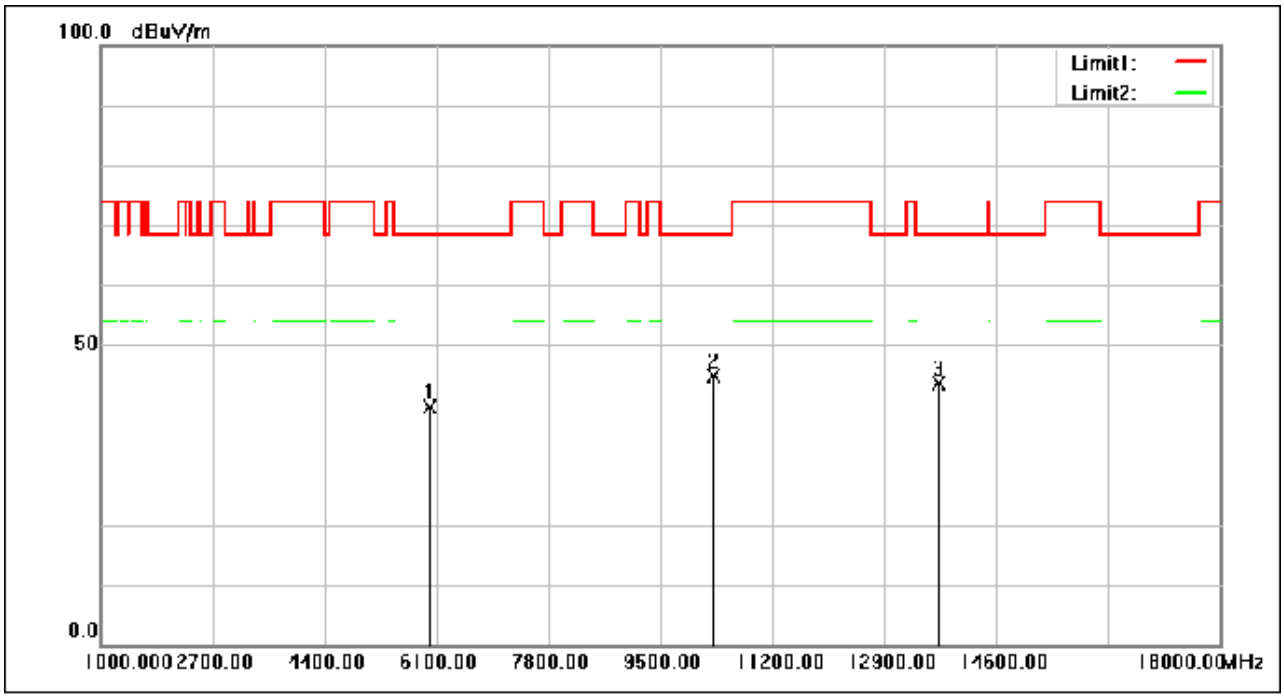


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6006.840	52.75	-13.05	39.70	68.30	-28.60	peak
2	10302.400	51.23	-6.37	44.86	68.30	-23.44	peak
3	13735.040	49.67	-6.02	43.65	68.30	-24.65	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

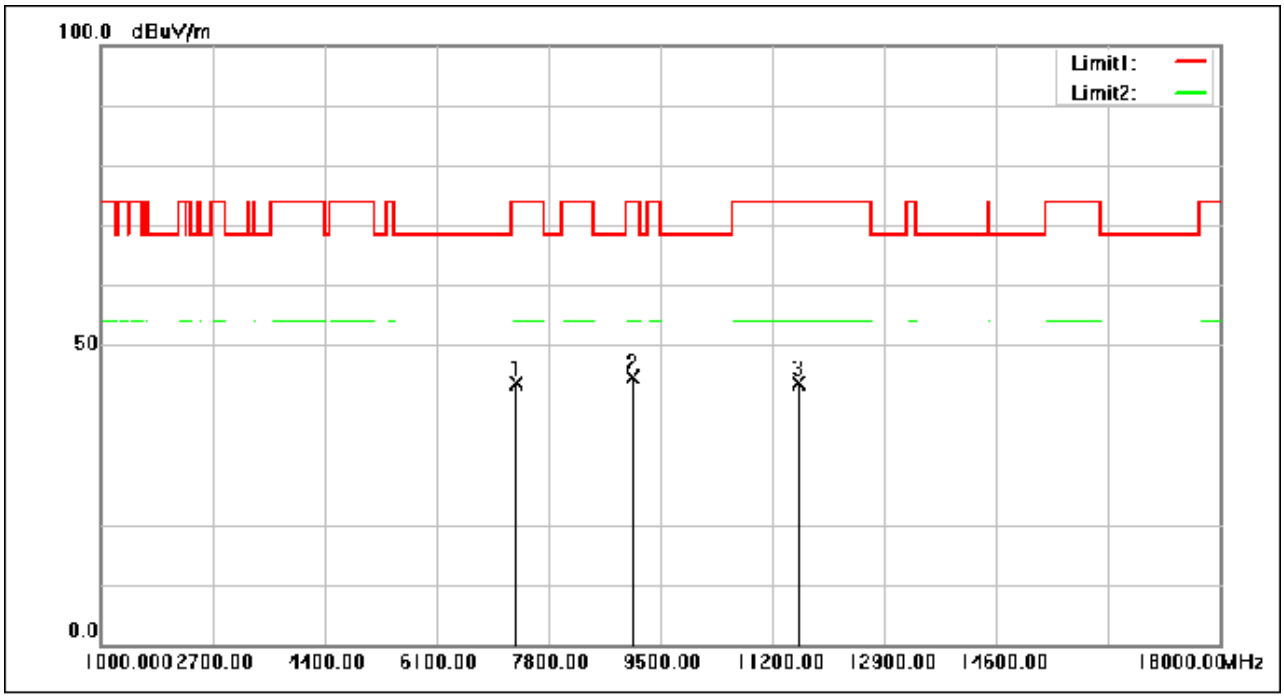


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7316.520	53.42	-9.70	43.72	74.00	-30.28	peak
2	9089.960	52.07	-7.56	44.51	74.00	-29.49	peak
3	11593.040	49.75	-6.14	43.61	74.00	-30.39	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

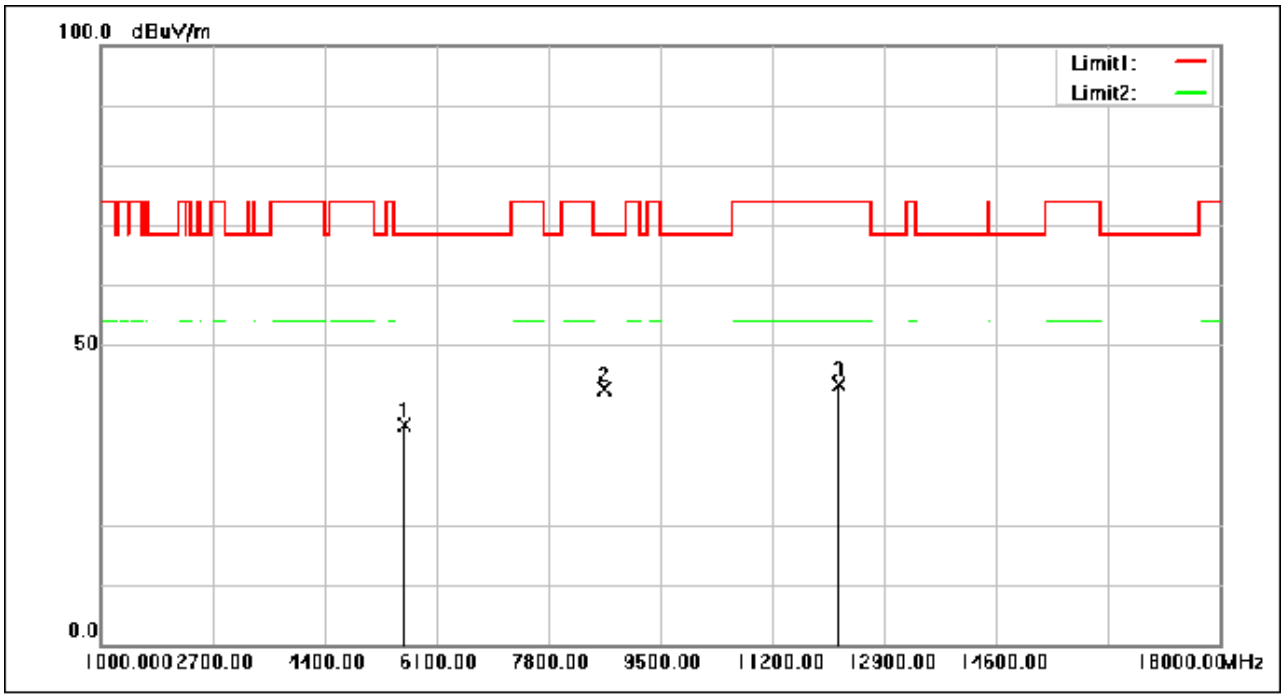


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5617.880	51.59	-14.98	36.61	68.30	-31.69	peak
2	8663.600	51.01	-8.45	42.56	68.30	-25.74	peak
3	12207.760	49.71	-6.21	43.50	74.00	-30.50	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

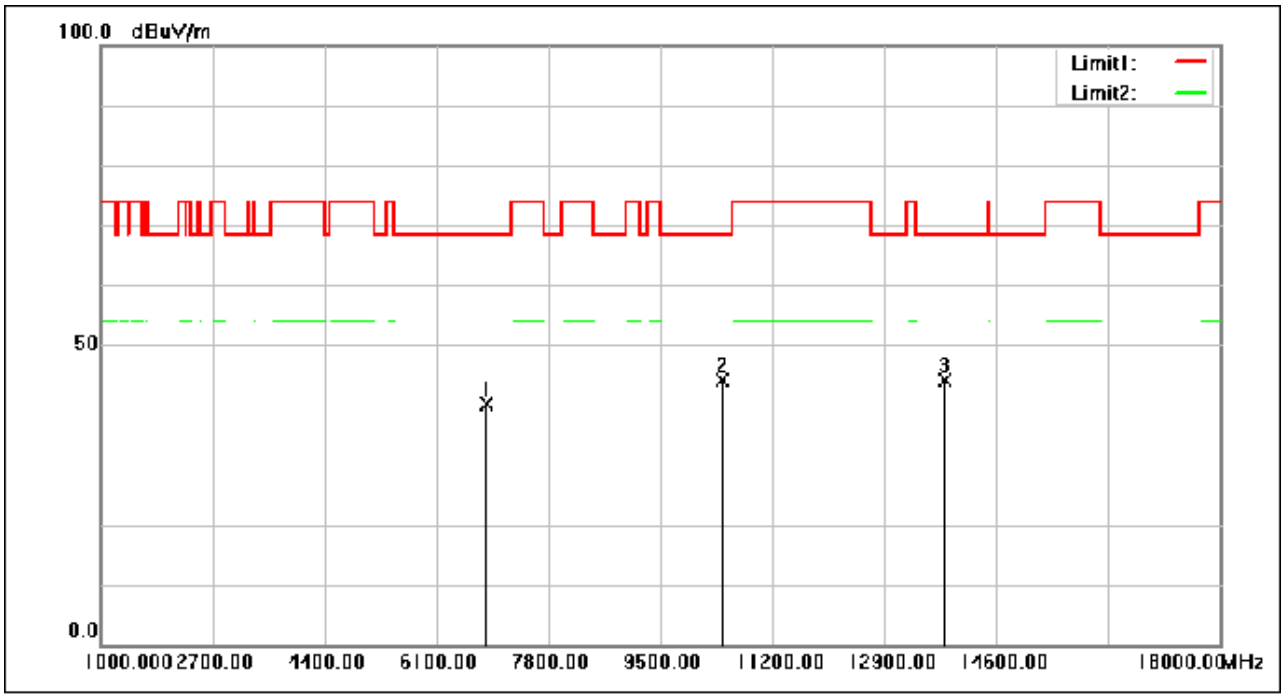


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6865.680	50.30	-10.05	40.25	68.30	-28.05	peak
2	10435.000	50.39	-6.38	44.01	68.30	-24.29	peak
3	13823.440	50.28	-6.12	44.16	68.30	-24.14	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

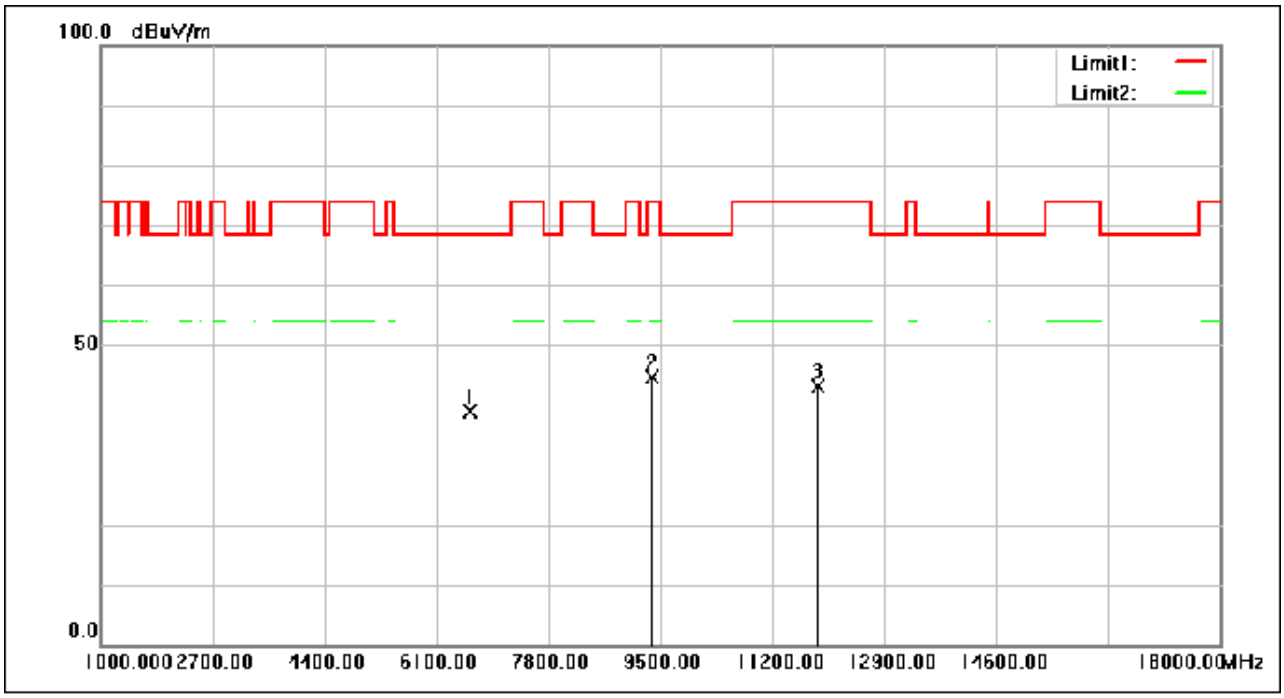


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6619.520	49.48	-10.58	38.90	68.30	-29.40	peak
2	9383.720	51.61	-7.09	44.52	74.00	-29.48	peak
3	11899.720	49.60	-6.38	43.22	74.00	-30.78	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

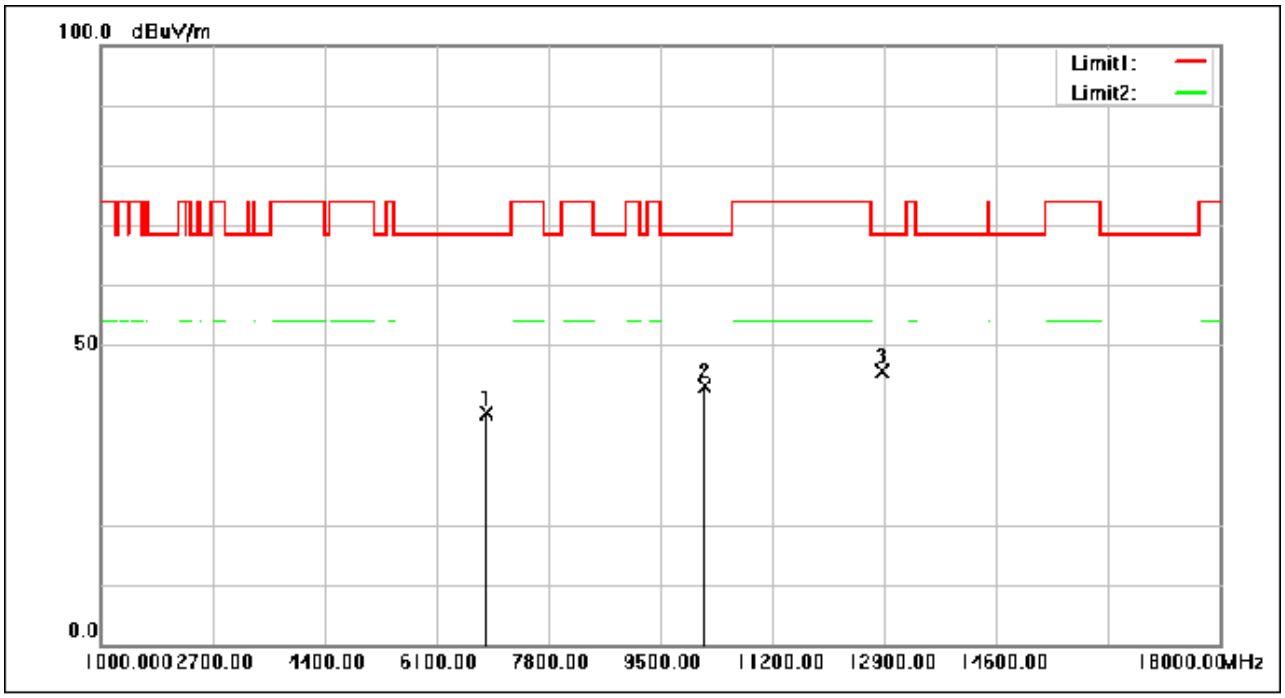


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6865.000	48.78	-10.05	38.73	68.30	-29.57	peak
2	10173.200	49.55	-6.35	43.20	68.30	-25.10	peak
3	12880.280	51.27	-5.64	45.63	68.30	-22.67	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

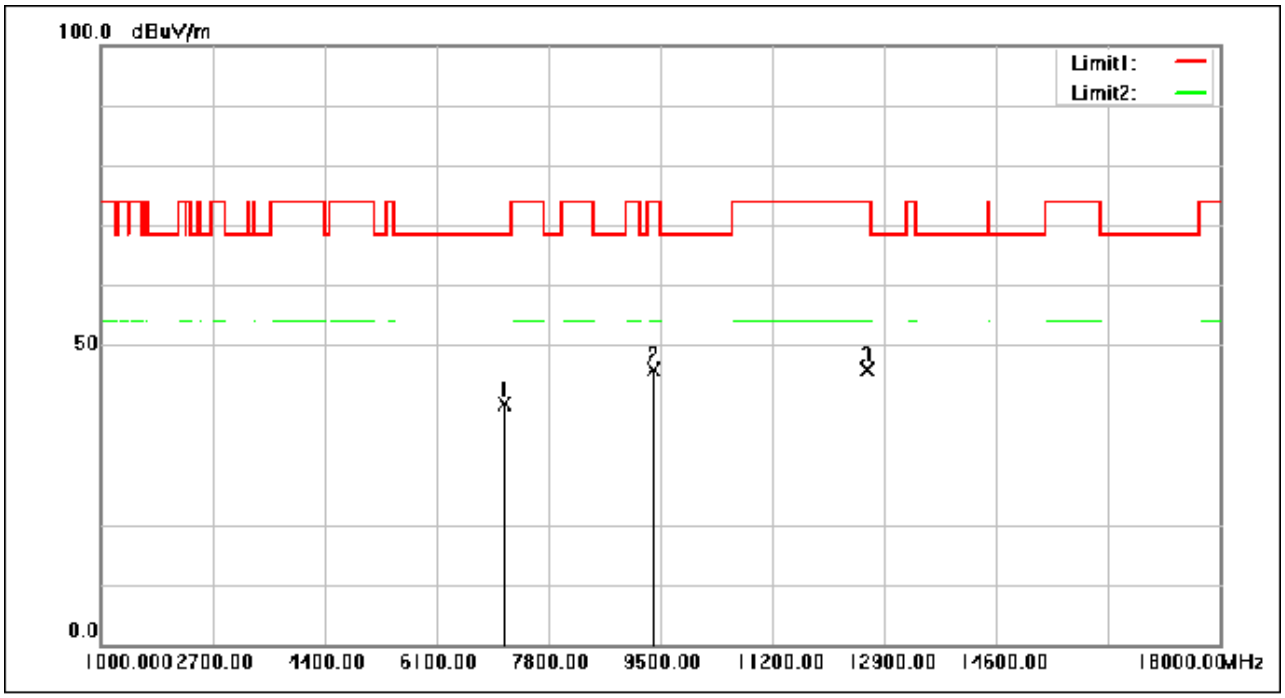


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7147.200	49.95	-9.84	40.11	68.30	-28.19	peak
2	9413.640	52.97	-7.05	45.92	74.00	-28.08	peak
3	12645.680	51.72	-5.84	45.88	74.00	-28.12	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

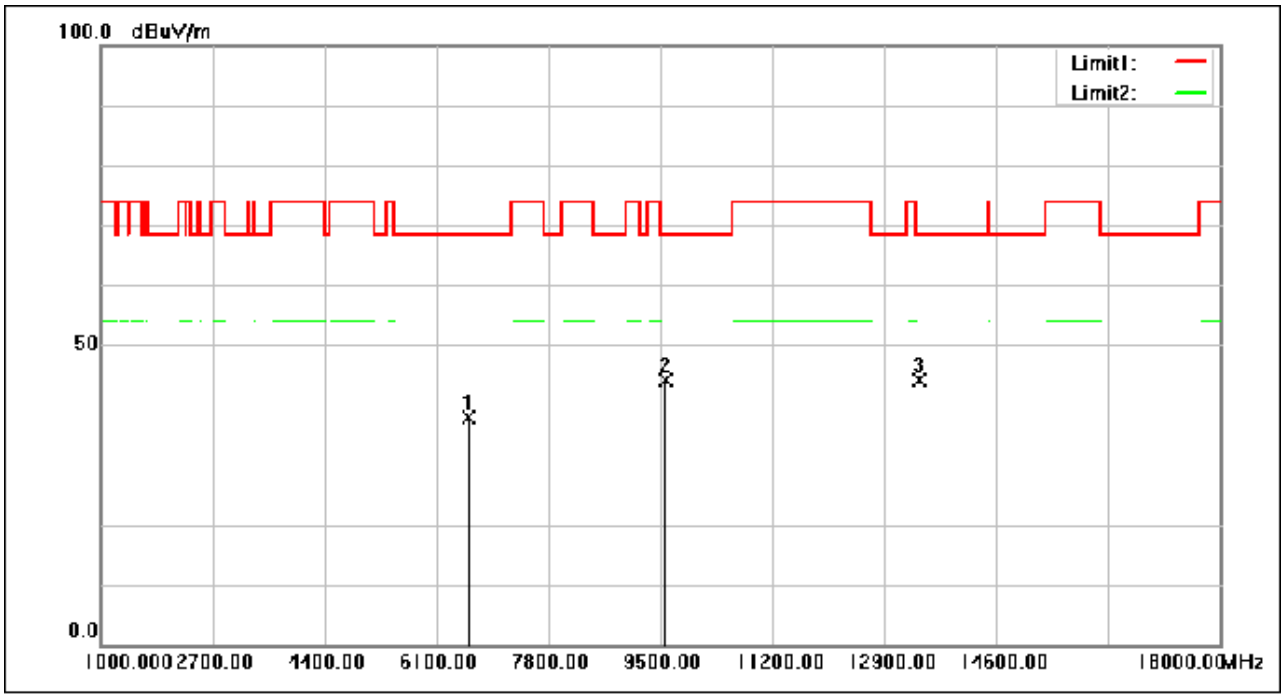

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6605.240	48.52	-10.64	37.88	68.30	-30.42	peak
2	9595.880	50.97	-6.73	44.24	68.30	-24.06	peak
3	13429.720	49.72	-5.70	44.02	68.30	-24.28	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

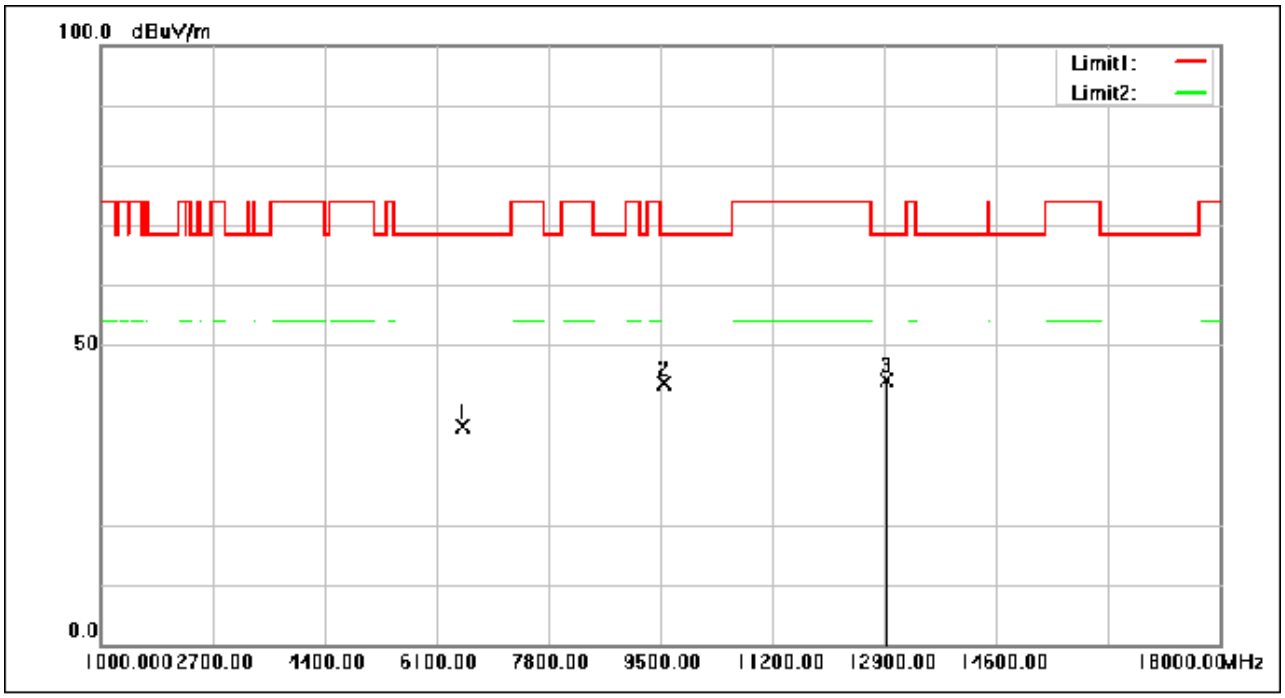

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6494.400	47.59	-11.10	36.49	68.30	-31.81	peak
2	9561.200	50.37	-6.79	43.58	68.30	-24.72	peak
3	12946.920	49.72	-5.59	44.13	68.30	-24.17	peak

7.10 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.10.1 E.U.T. Operation


Operating Environment:
Temperature: 20.5 °C Humidity: 50.5 % RH Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII 1)_Keep the EUT in continuously transmitting mode with all

		modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

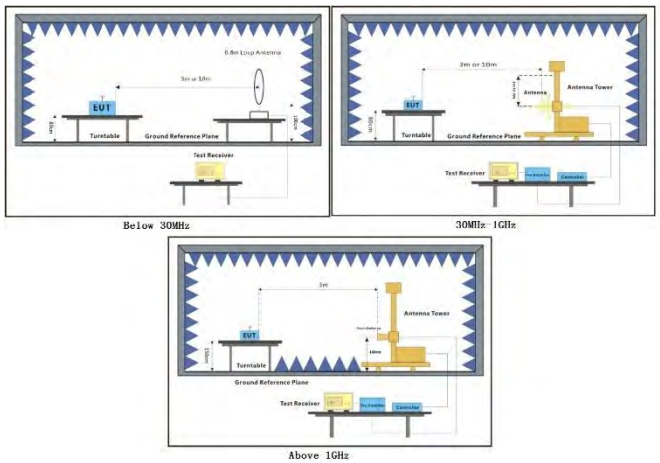

7.10.4 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.


i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Dipole Antenna

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

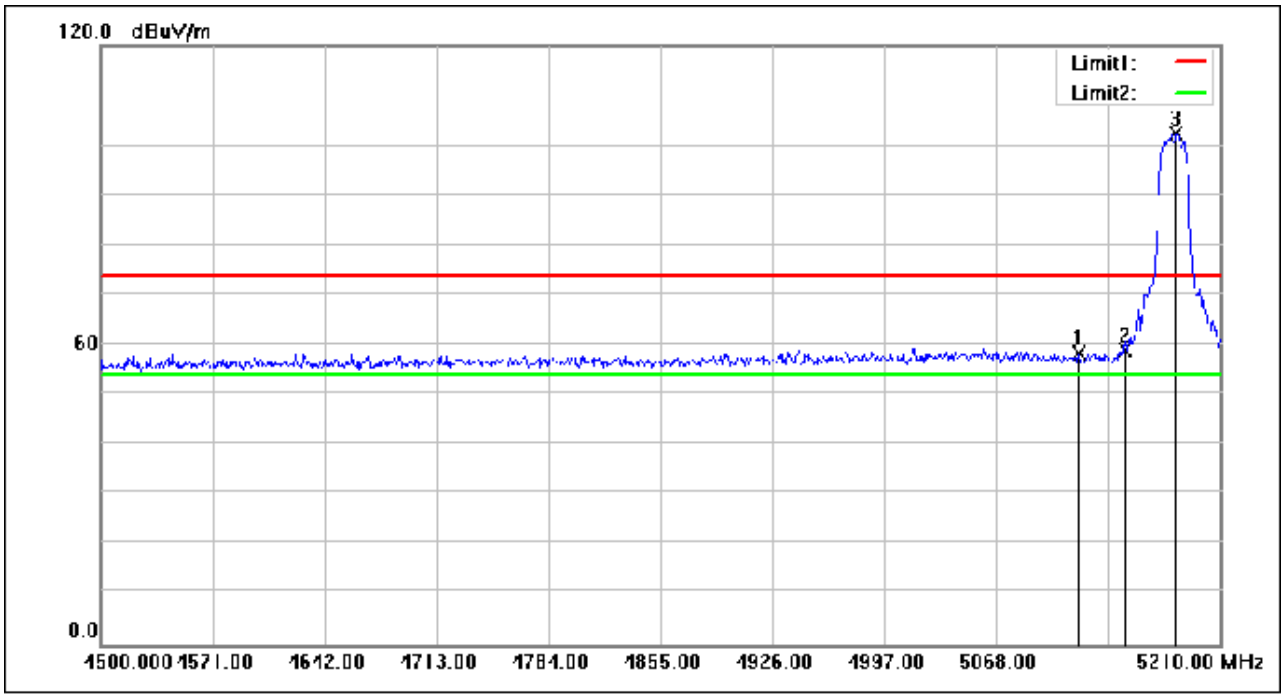


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.540	73.92	-15.56	58.36	74.00	-15.64	peak
2	5150.000	74.37	-15.49	58.88	74.00	-15.12	peak
3	5182.310	117.79	-15.46	102.33	74.00	28.33	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

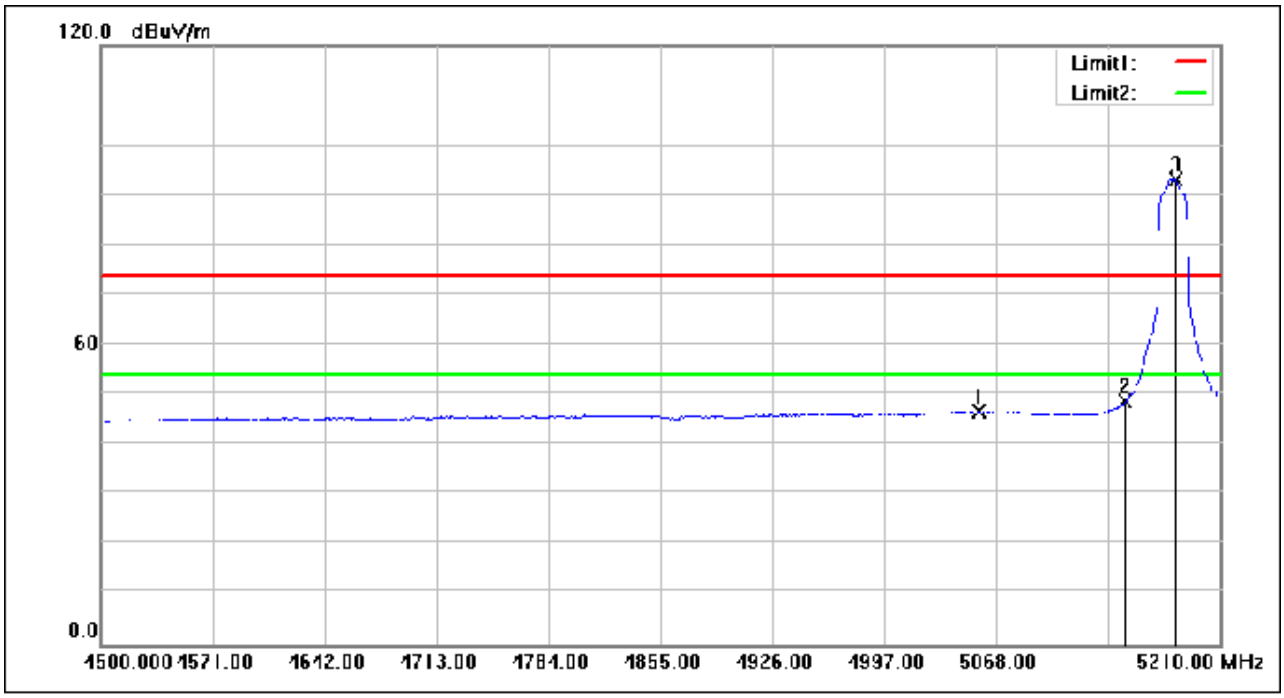


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5057.350	62.41	-15.70	46.71	54.00	-7.29	AVG
2	5150.000	64.35	-15.49	48.86	54.00	-5.14	AVG
3	5181.600	108.74	-15.46	93.28	54.00	39.28	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

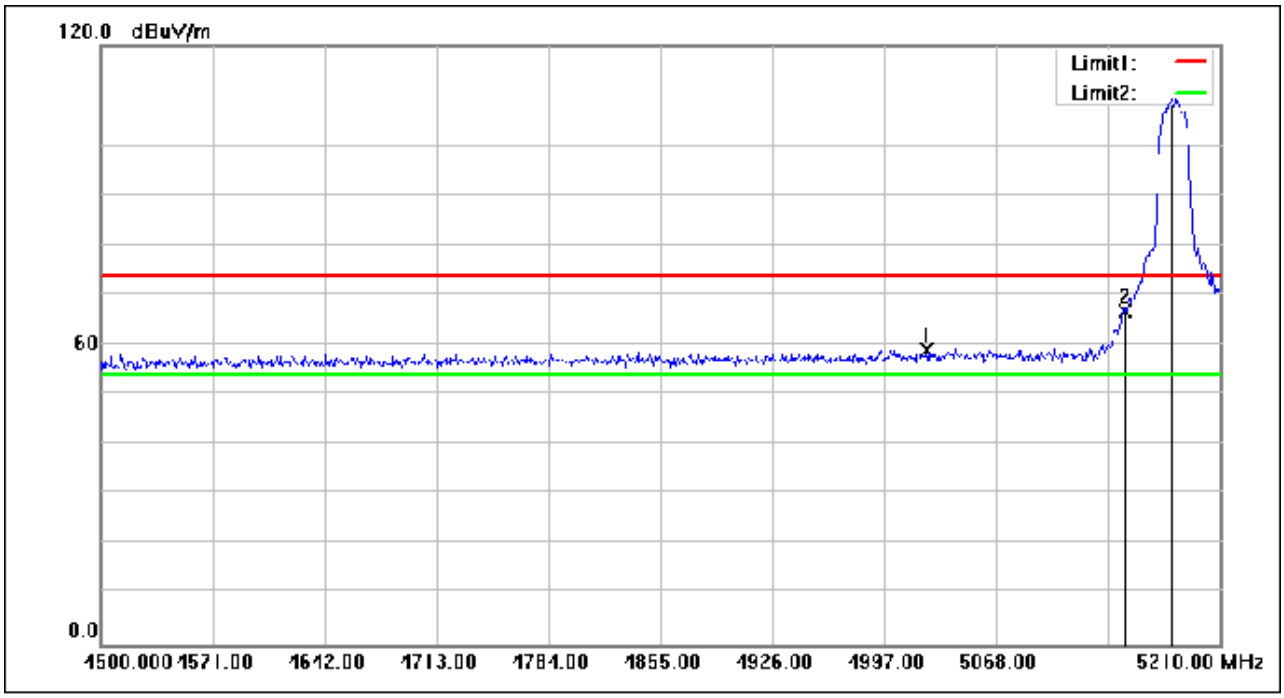


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5023.980	74.82	-15.79	59.03	74.00	-14.97	peak
2	5150.000	82.35	-15.49	66.86	74.00	-7.14	peak
3	5178.760	124.67	-15.46	109.21	74.00	35.21	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

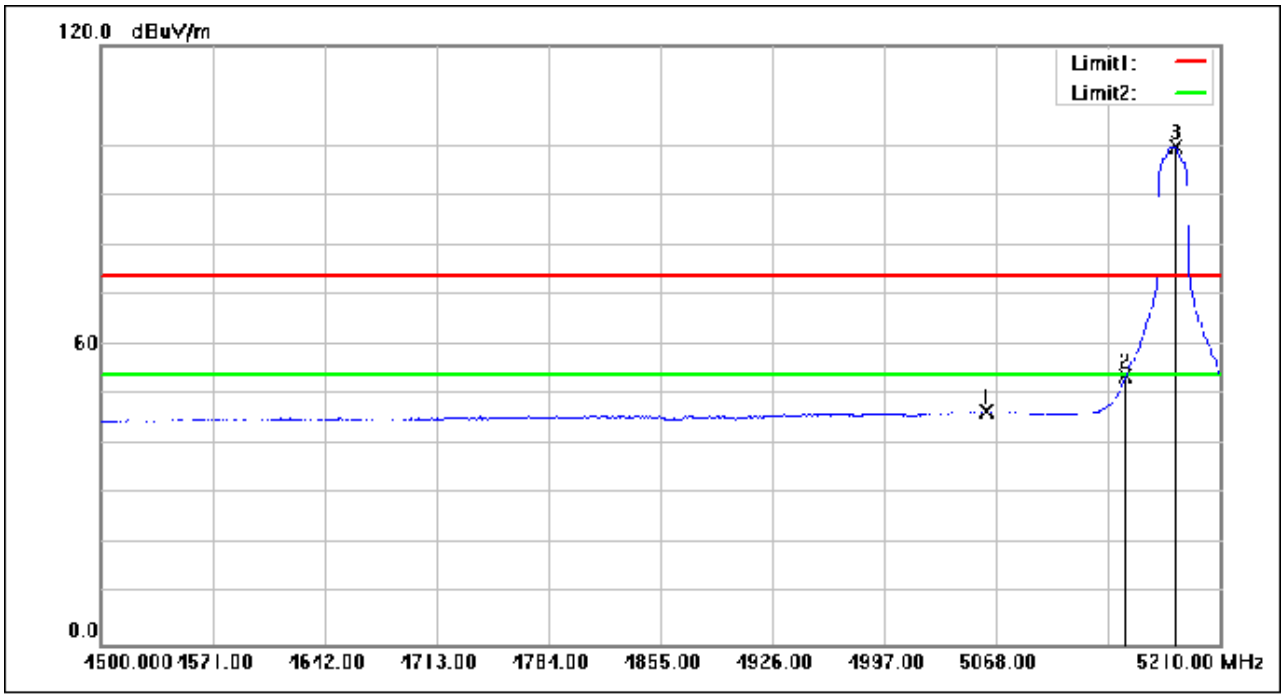


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.610	62.27	-15.69	46.58	54.00	-7.42	AVG
2	5150.000	69.35	-15.49	53.86	54.00	-0.14	AVG
3	5181.600	115.28	-15.46	99.82	54.00	45.82	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

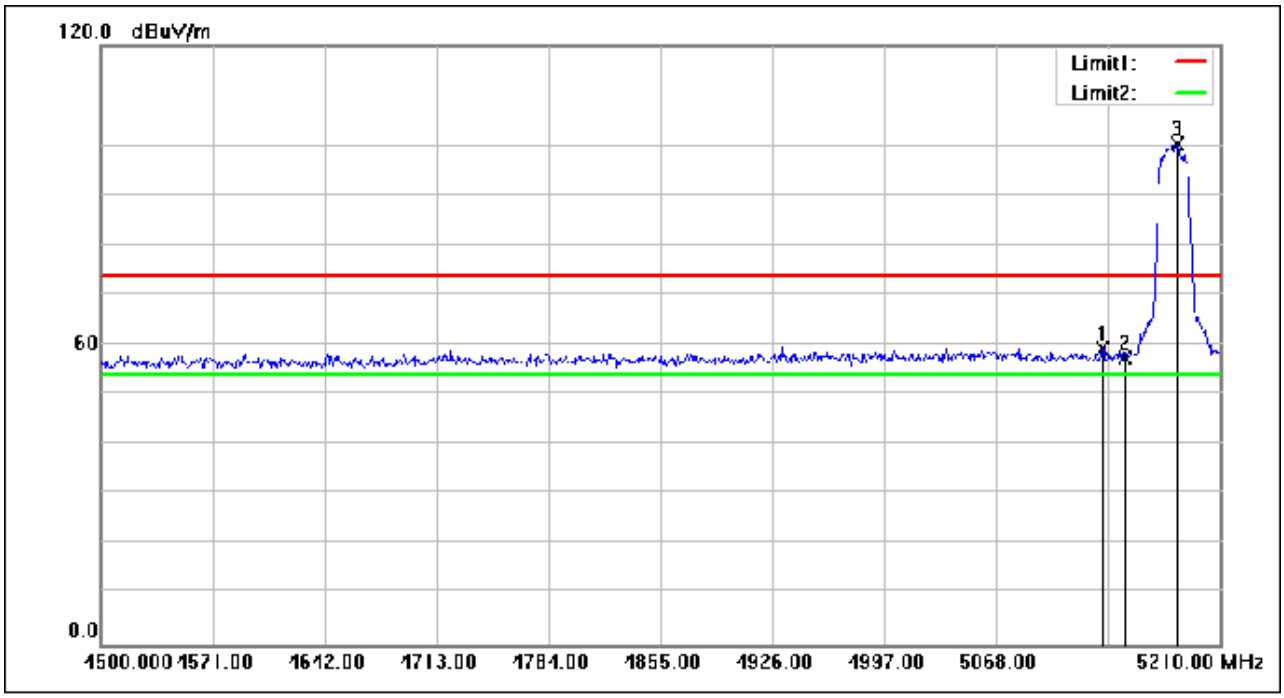


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5135.450	74.88	-15.52	59.36	74.00	-14.64	peak
2	5150.000	72.91	-15.49	57.42	74.00	-16.58	peak
3	5183.020	115.71	-15.45	100.26	74.00	26.26	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

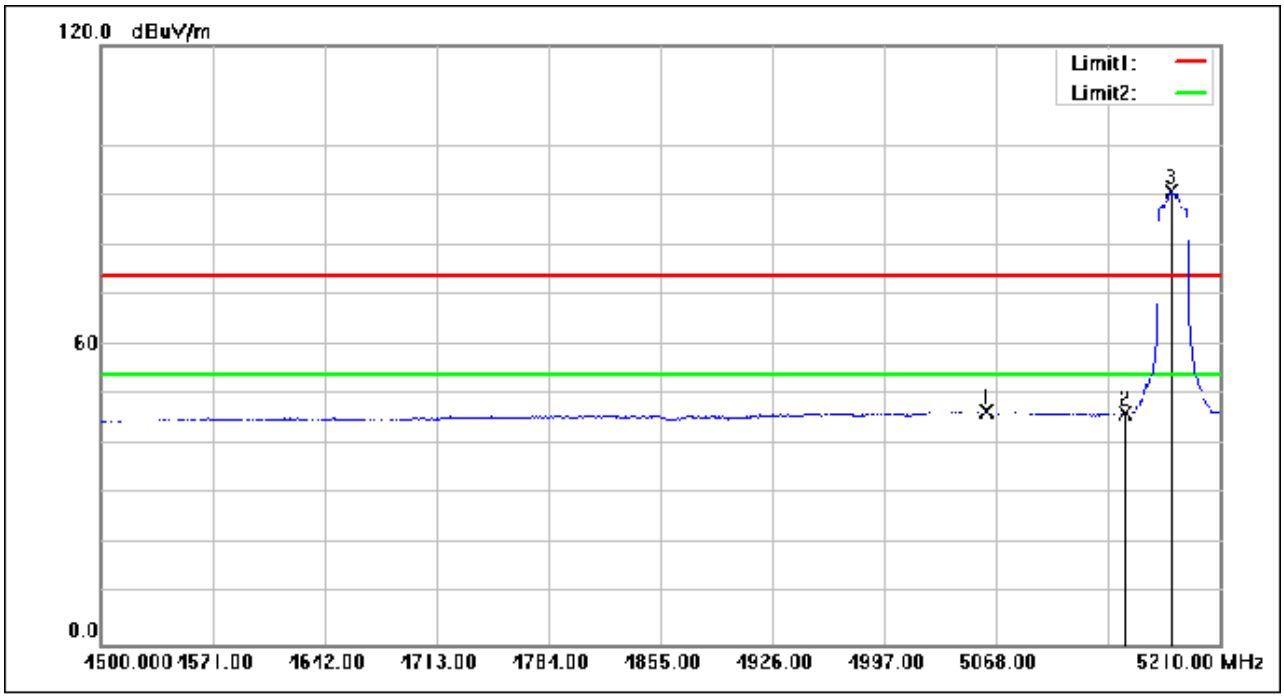


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.610	62.40	-15.69	46.71	54.00	-7.29	AVG
2	5150.000	61.94	-15.49	46.45	54.00	-7.55	AVG
3	5178.760	106.30	-15.46	90.84	54.00	36.84	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

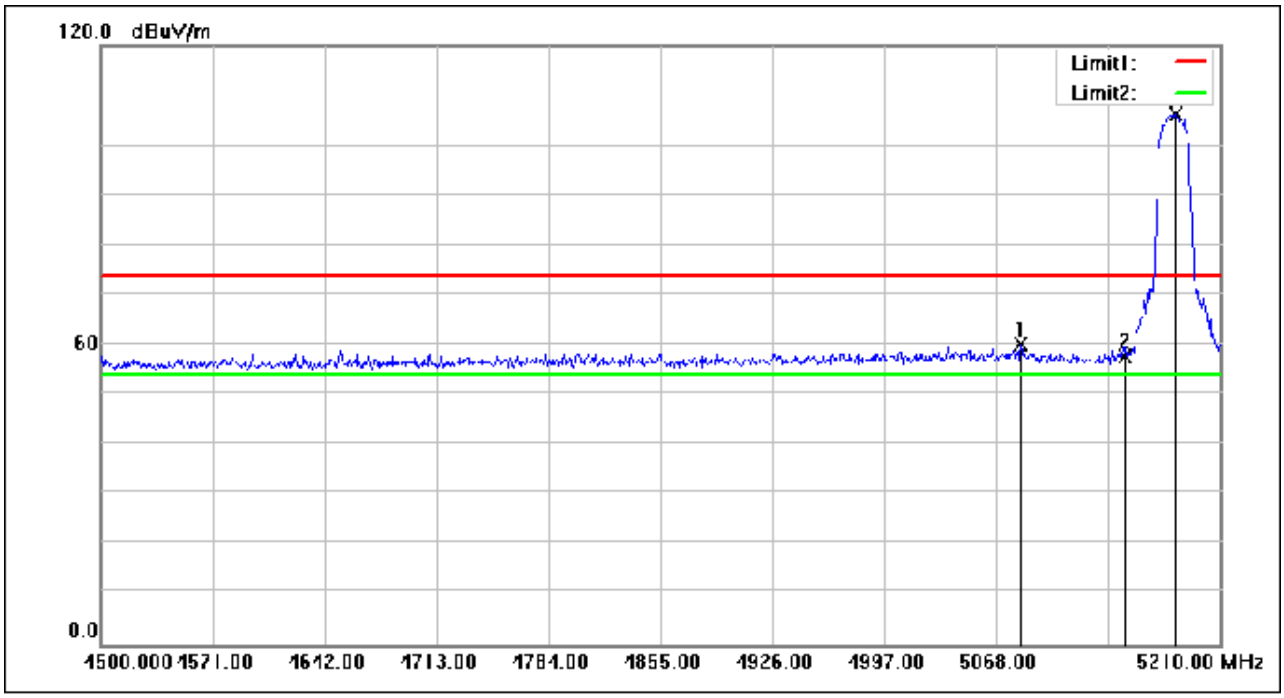


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5083.620	75.68	-15.64	60.04	74.00	-13.96	peak
2	5150.000	73.19	-15.49	57.70	74.00	-16.30	peak
3	5181.600	121.86	-15.46	106.40	74.00	32.40	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

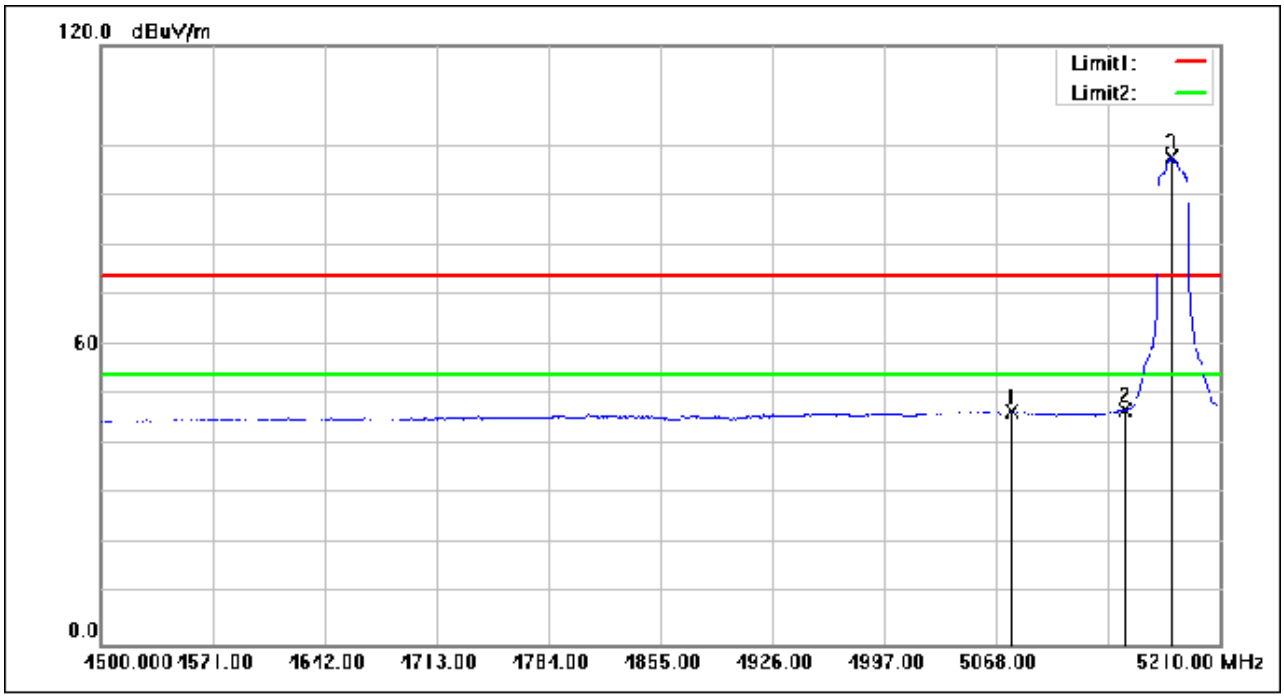


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.940	62.28	-15.66	46.62	54.00	-7.38	AVG
2	5150.000	62.42	-15.49	46.93	54.00	-7.07	AVG
3	5178.760	113.13	-15.46	97.67	54.00	43.67	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

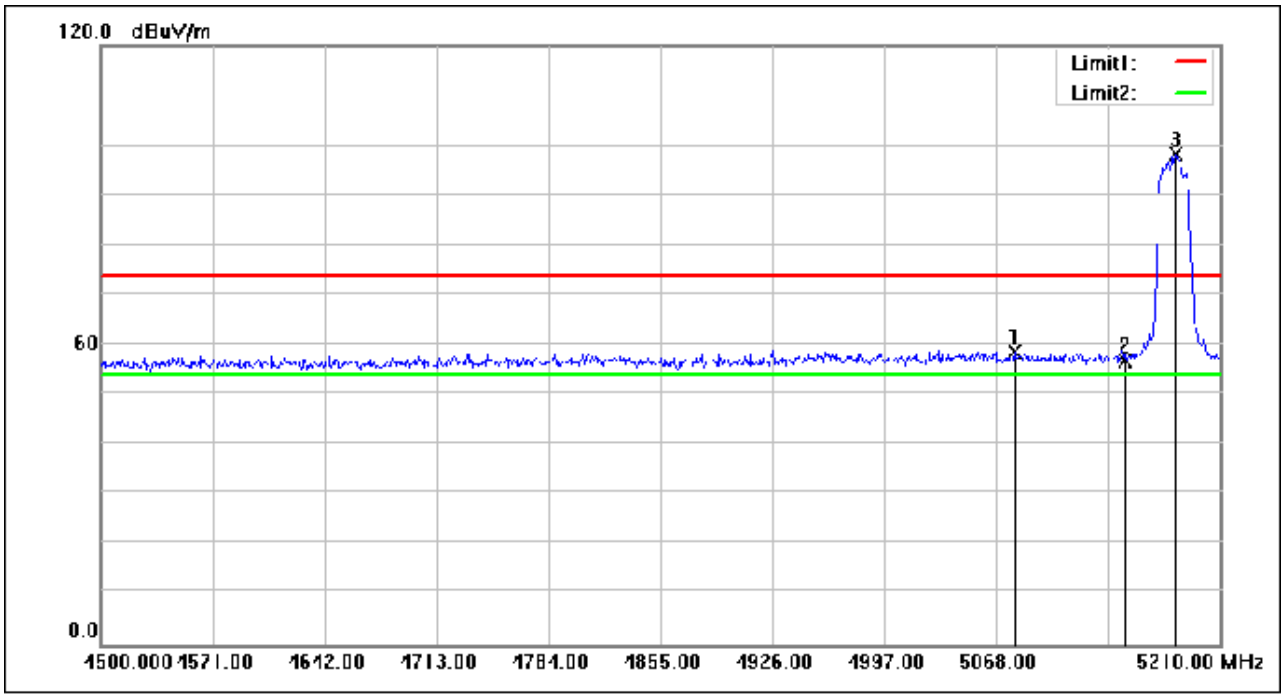


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5079.360	74.21	-15.65	58.56	74.00	-15.44	peak
2	5150.000	72.37	-15.49	56.88	74.00	-17.12	peak
3	5181.600	113.77	-15.46	98.31	74.00	24.31	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

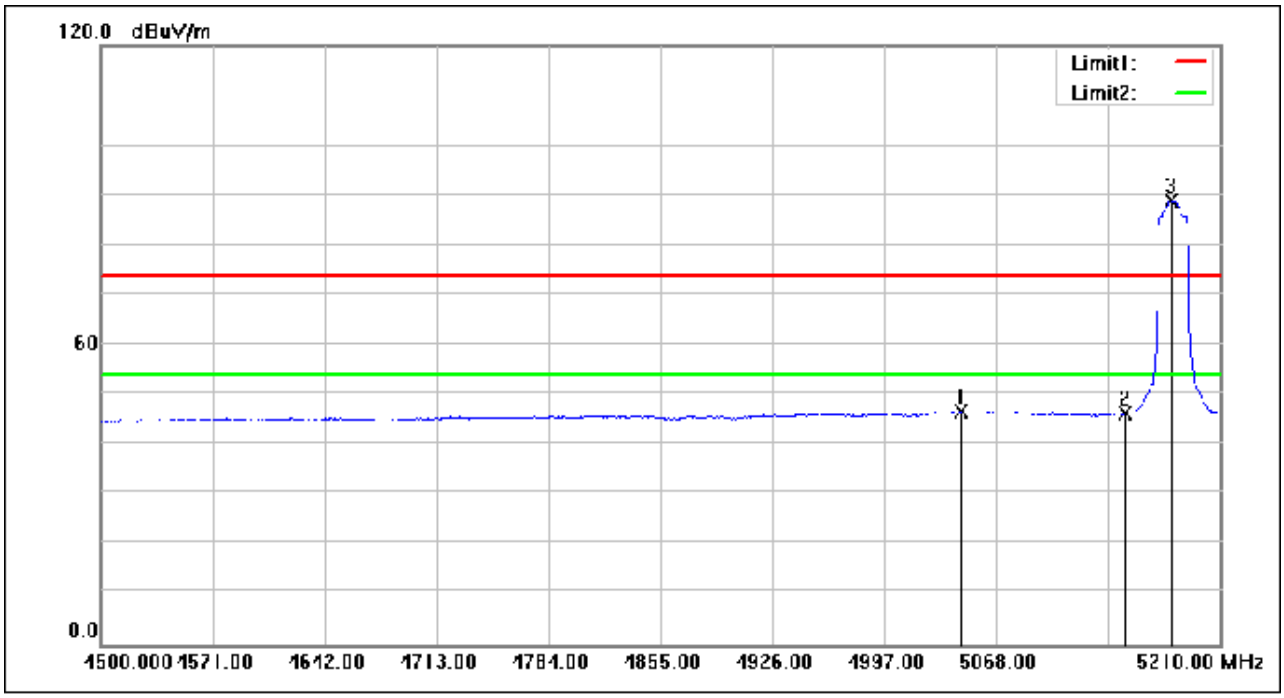


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.280	62.30	-15.73	46.57	54.00	-7.43	AVG
2	5150.000	61.93	-15.49	46.44	54.00	-7.56	AVG
3	5178.760	104.44	-15.46	88.98	54.00	34.98	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

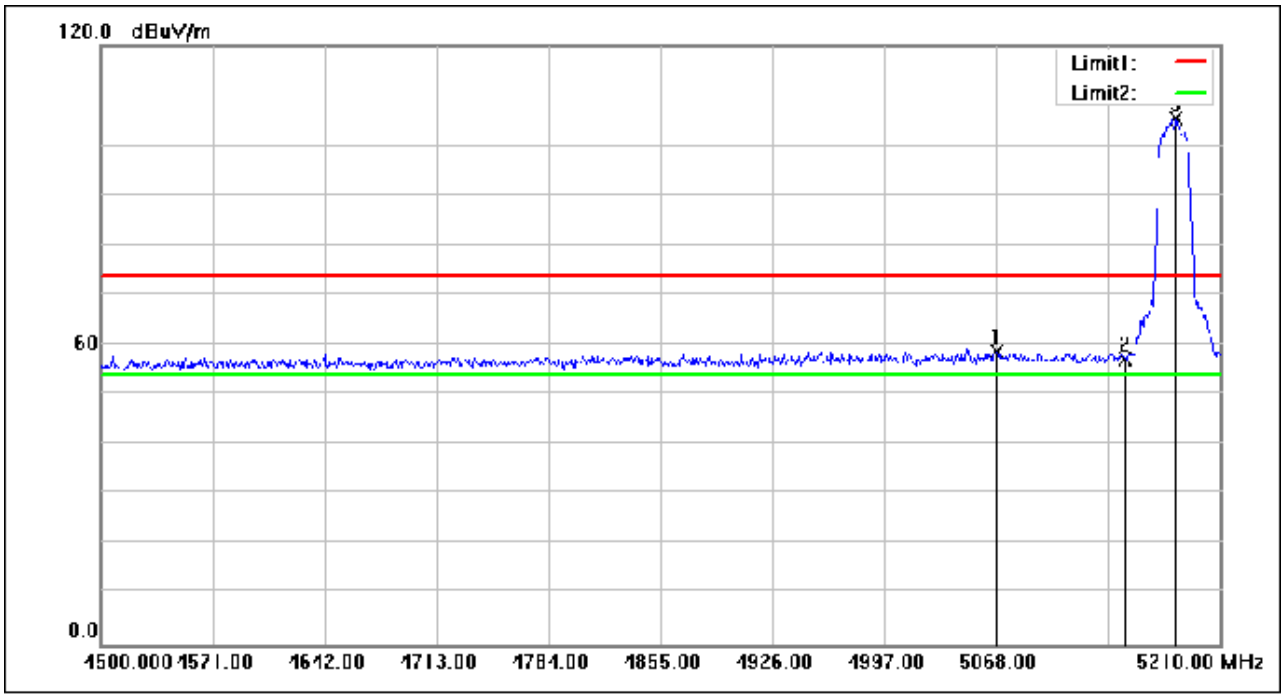


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5068.000	74.44	-15.68	58.76	74.00	-15.24	peak
2	5150.000	72.76	-15.49	57.27	74.00	-16.73	peak
3	5182.310	120.89	-15.46	105.43	74.00	31.43	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

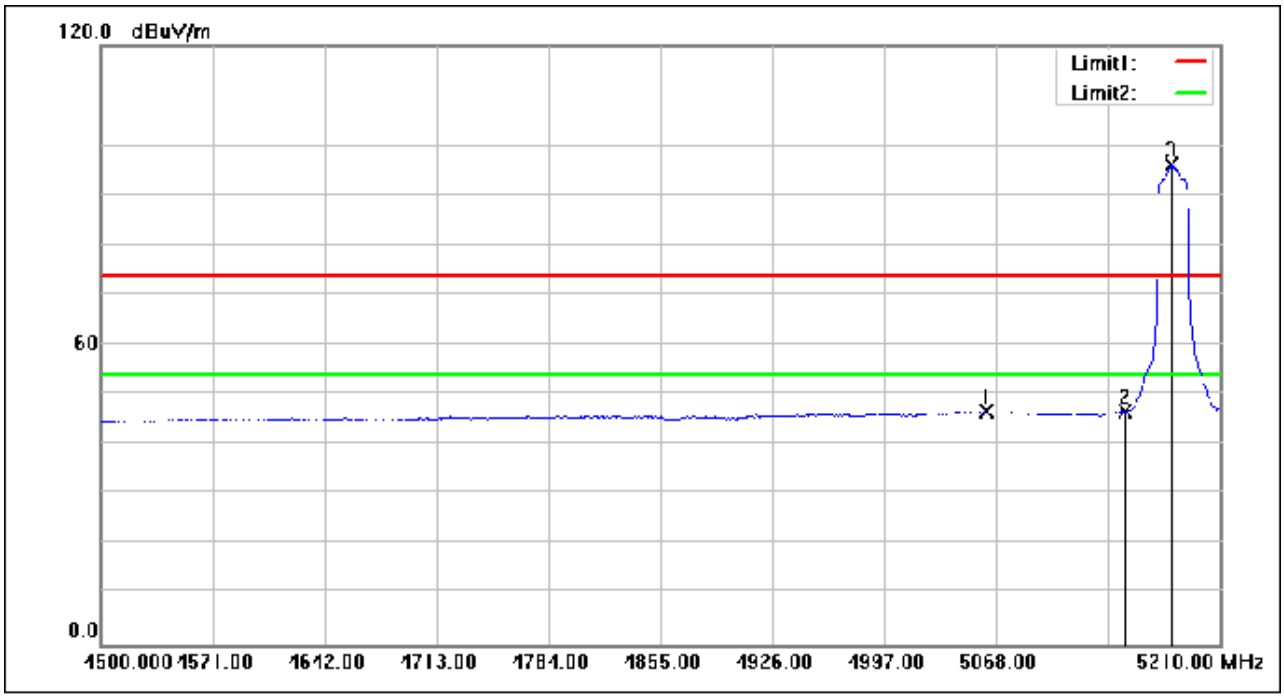


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.610	62.35	-15.69	46.66	54.00	-7.34	AVG
2	5150.000	62.24	-15.49	46.75	54.00	-7.25	AVG
3	5178.760	111.50	-15.46	96.04	54.00	42.04	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

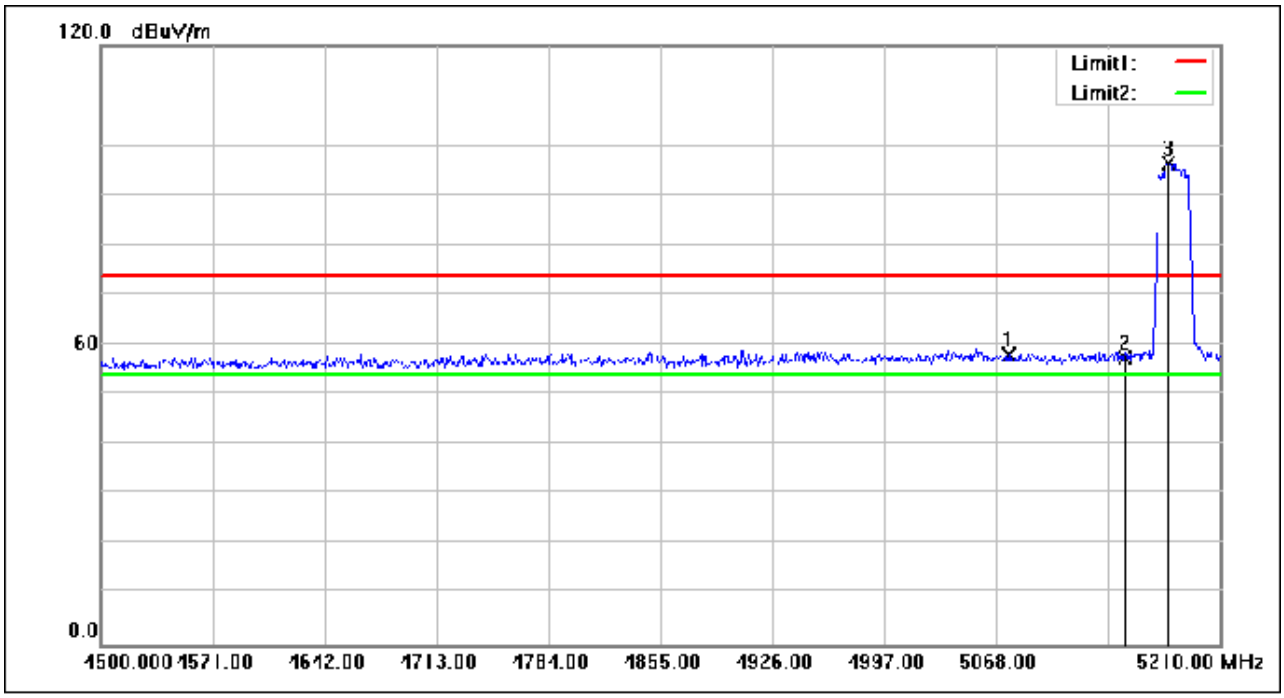


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5075.810	73.72	-15.66	58.06	74.00	-15.94	peak
2	5150.000	73.01	-15.49	57.52	74.00	-16.48	peak
3	5177.340	111.85	-15.46	96.39	74.00	22.39	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

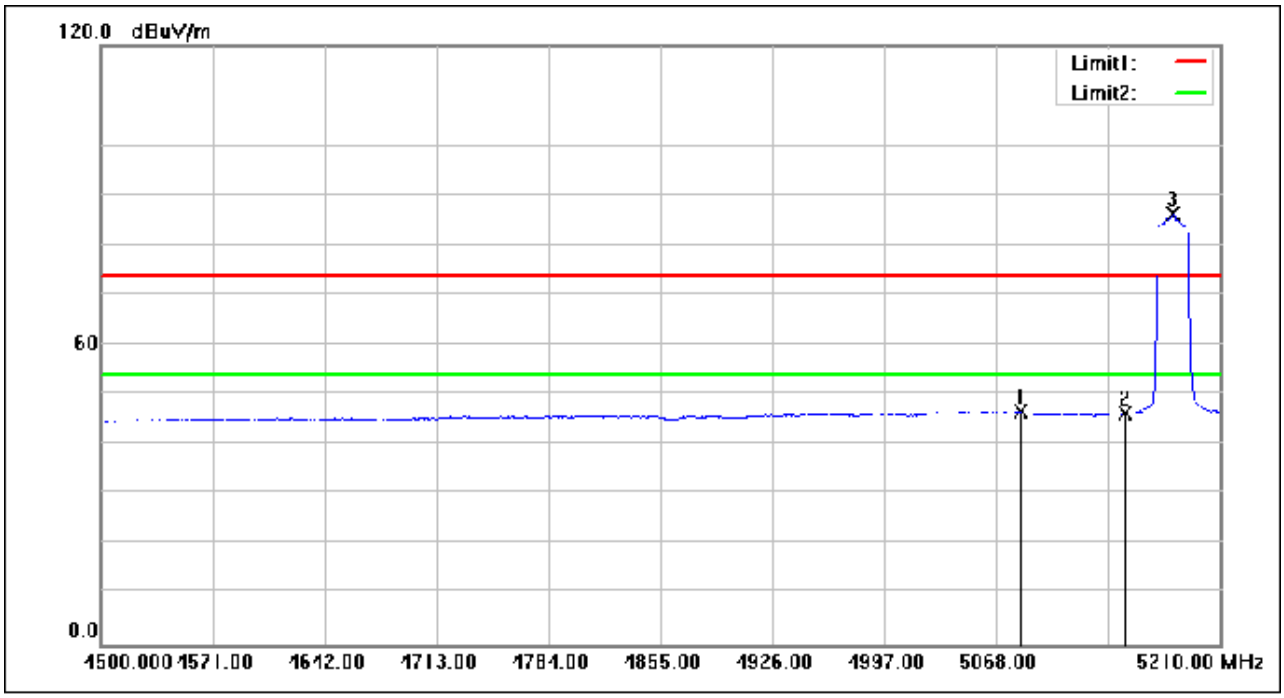


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5083.620	62.27	-15.64	46.63	54.00	-7.37	AVG
2	5150.000	61.88	-15.49	46.39	54.00	-7.61	AVG
3	5180.180	101.69	-15.46	86.23	54.00	32.23	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

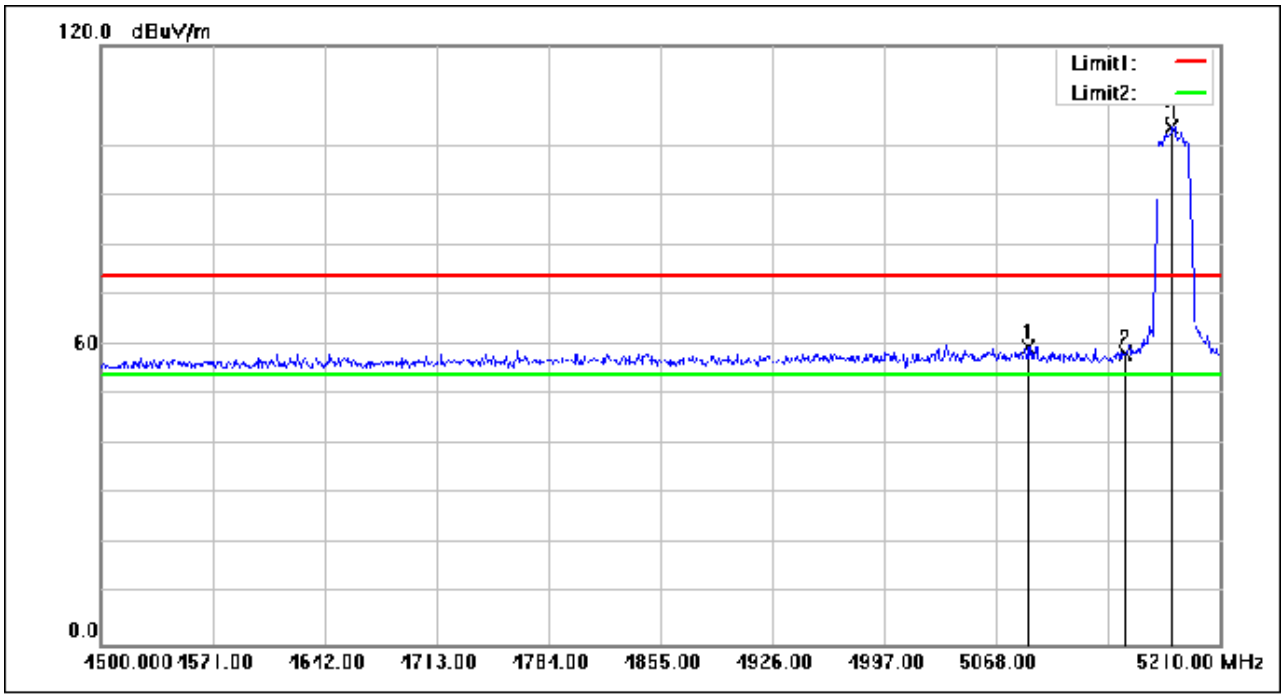


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.590	75.32	-15.63	59.69	74.00	-14.31	peak
2	5150.000	73.82	-15.49	58.33	74.00	-15.67	peak
3	5179.470	119.12	-15.46	103.66	74.00	29.66	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

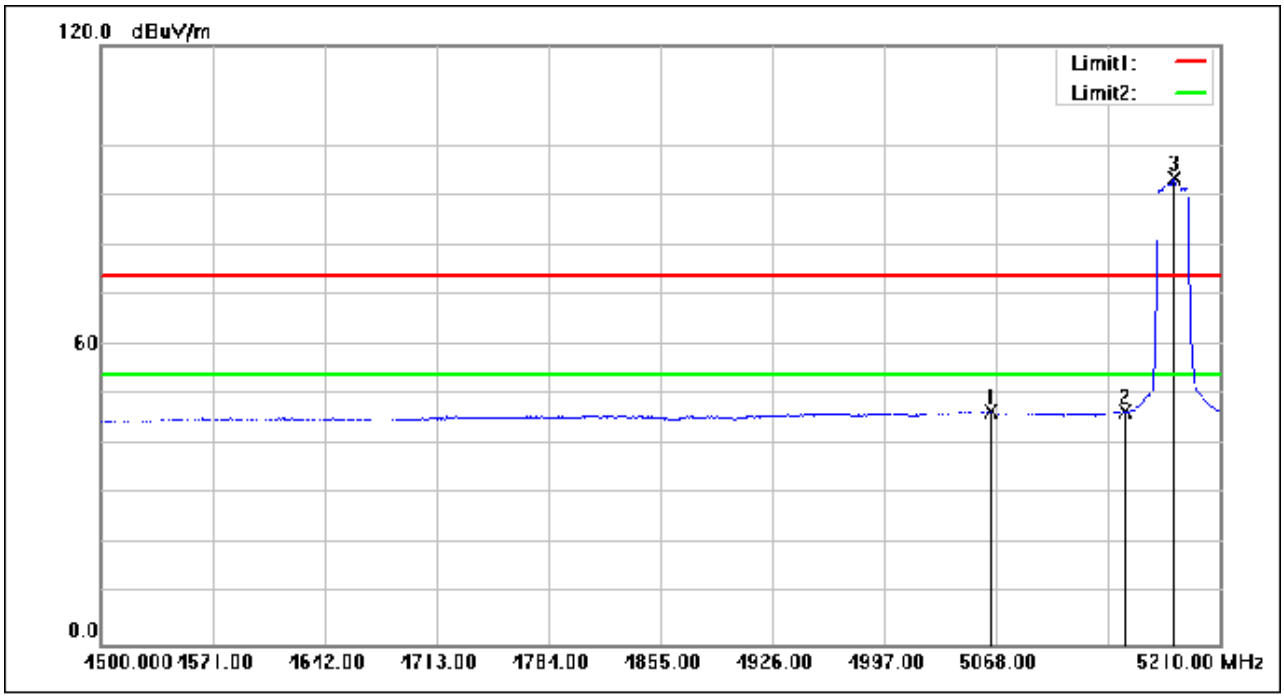


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5064.450	62.24	-15.68	46.56	54.00	-7.44	AVG
2	5150.000	62.17	-15.49	46.68	54.00	-7.32	AVG
3	5180.890	108.84	-15.46	93.38	54.00	39.38	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

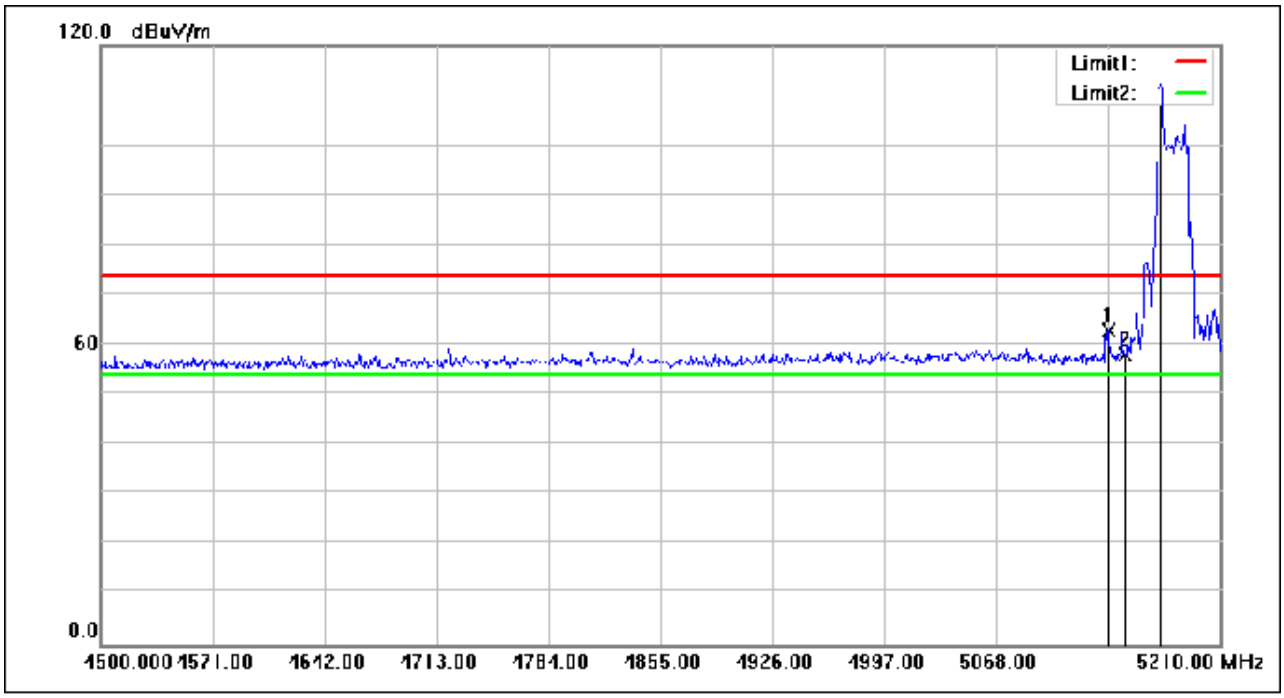


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.000	78.30	-15.51	62.79	74.00	-11.21	peak
2	5150.000	73.56	-15.49	58.07	74.00	-15.93	peak
3	5172.370	127.94	-15.47	112.47	74.00	38.47	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

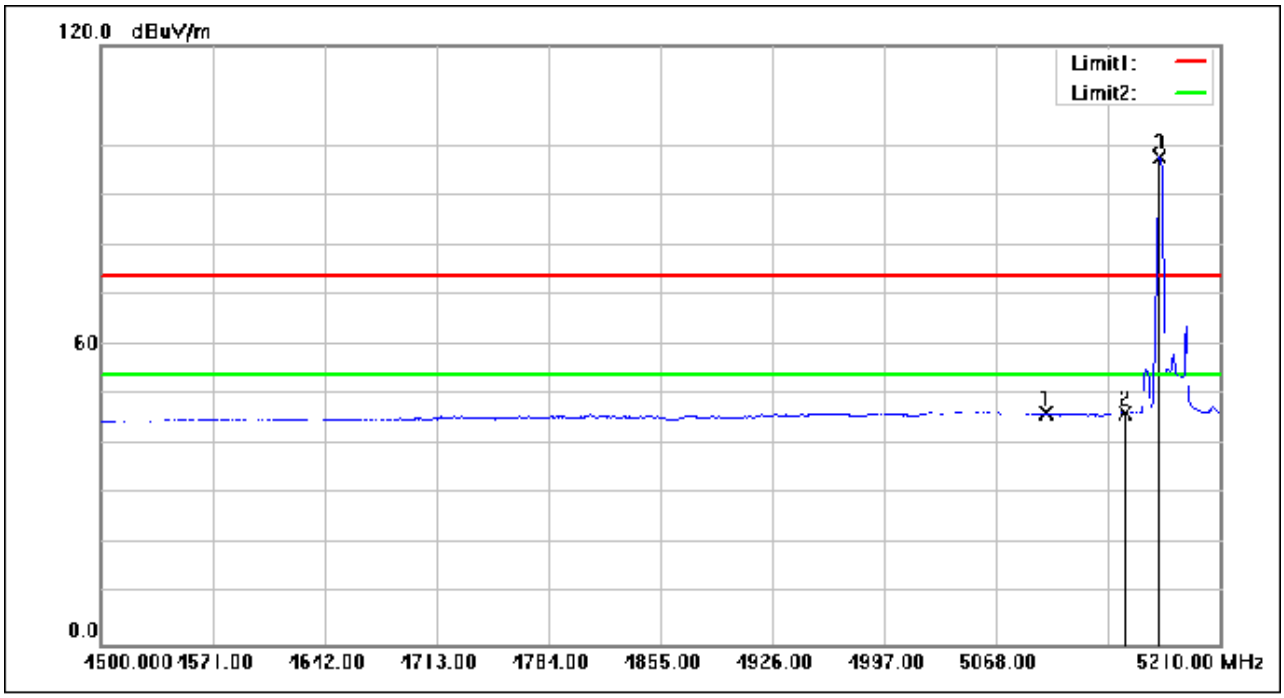


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5099.240	61.83	-15.61	46.22	54.00	-7.78	AVG
2	5150.000	61.82	-15.49	46.33	54.00	-7.67	AVG
3	5171.660	112.99	-15.47	97.52	54.00	43.52	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

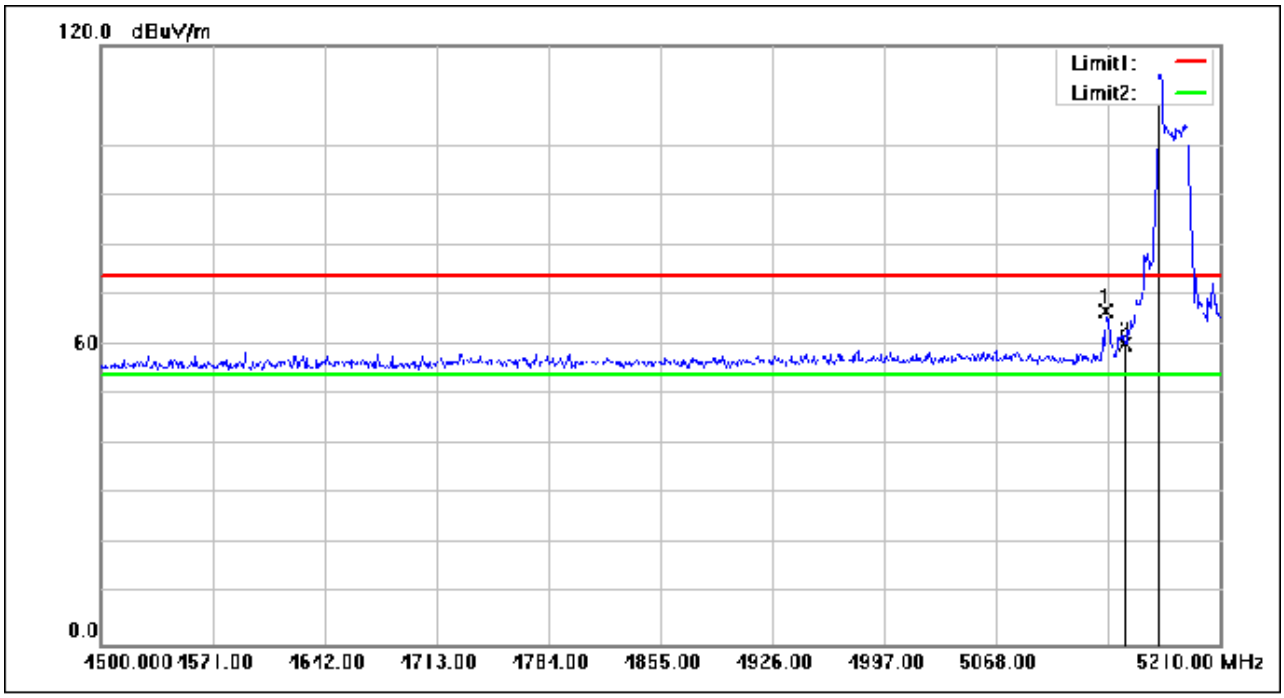


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5137.580	82.18	-15.52	66.66	74.00	-7.34	peak
2	5150.000	75.53	-15.49	60.04	74.00	-13.96	peak
3	5171.660	129.74	-15.47	114.27	74.00	40.27	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

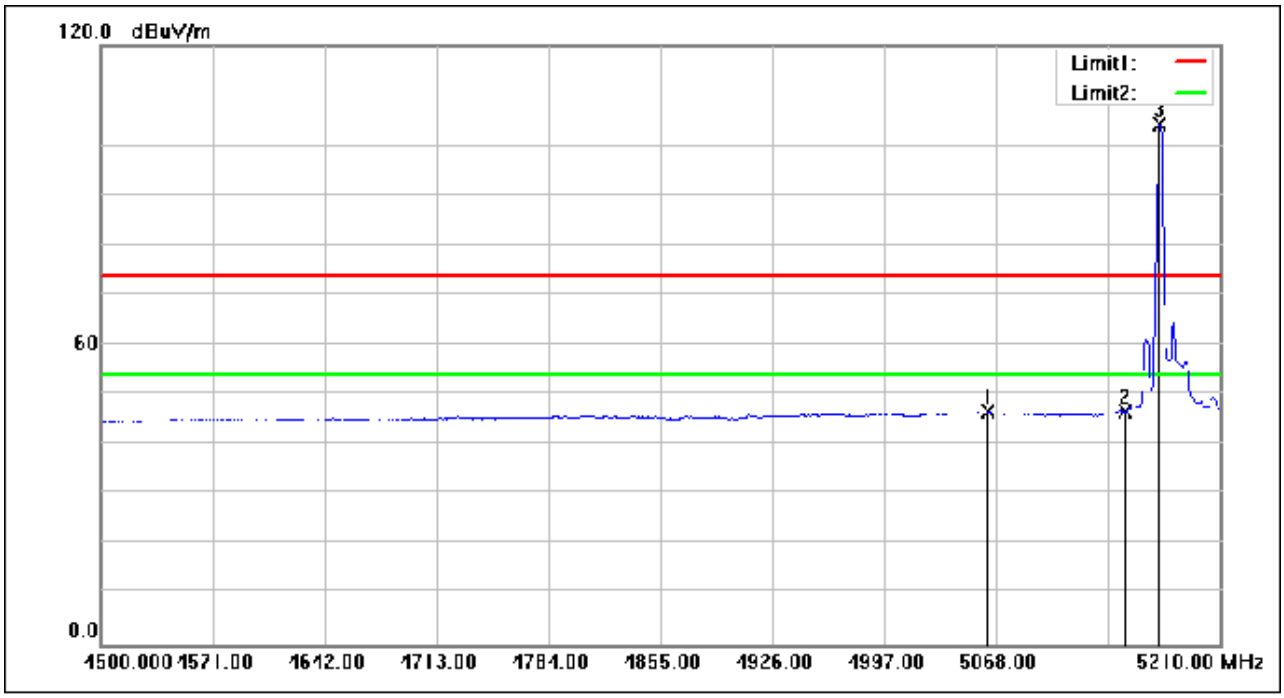


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5062.320	62.25	-15.69	46.56	74.00	-27.44	peak
2	5150.000	62.28	-15.49	46.79	74.00	-27.21	peak
3	5171.660	119.85	-15.47	104.38	74.00	30.38	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

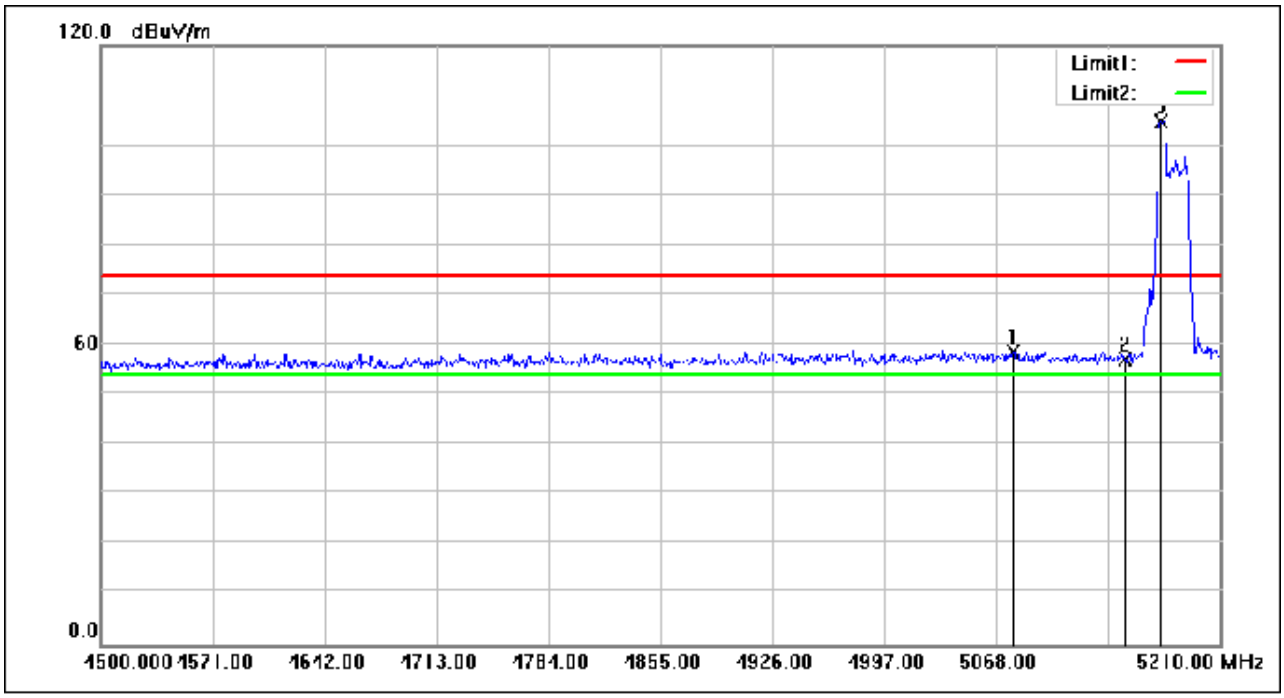


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.650	74.22	-15.66	58.56	74.00	-15.44	peak
2	5150.000	72.75	-15.49	57.26	74.00	-16.74	peak
3	5172.370	120.40	-15.47	104.93	74.00	30.93	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

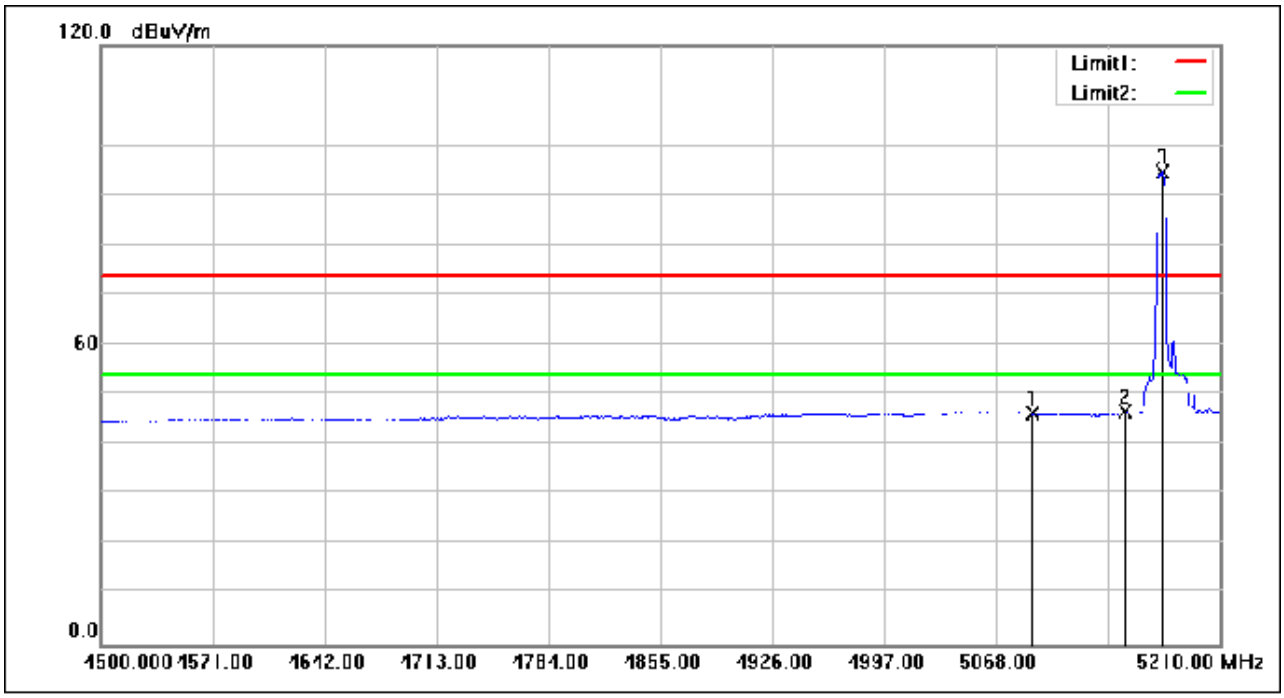


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5090.720	61.96	-15.62	46.34	54.00	-7.66	AVG
2	5150.000	62.10	-15.49	46.61	54.00	-7.39	AVG
3	5173.080	110.07	-15.46	94.61	54.00	40.61	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

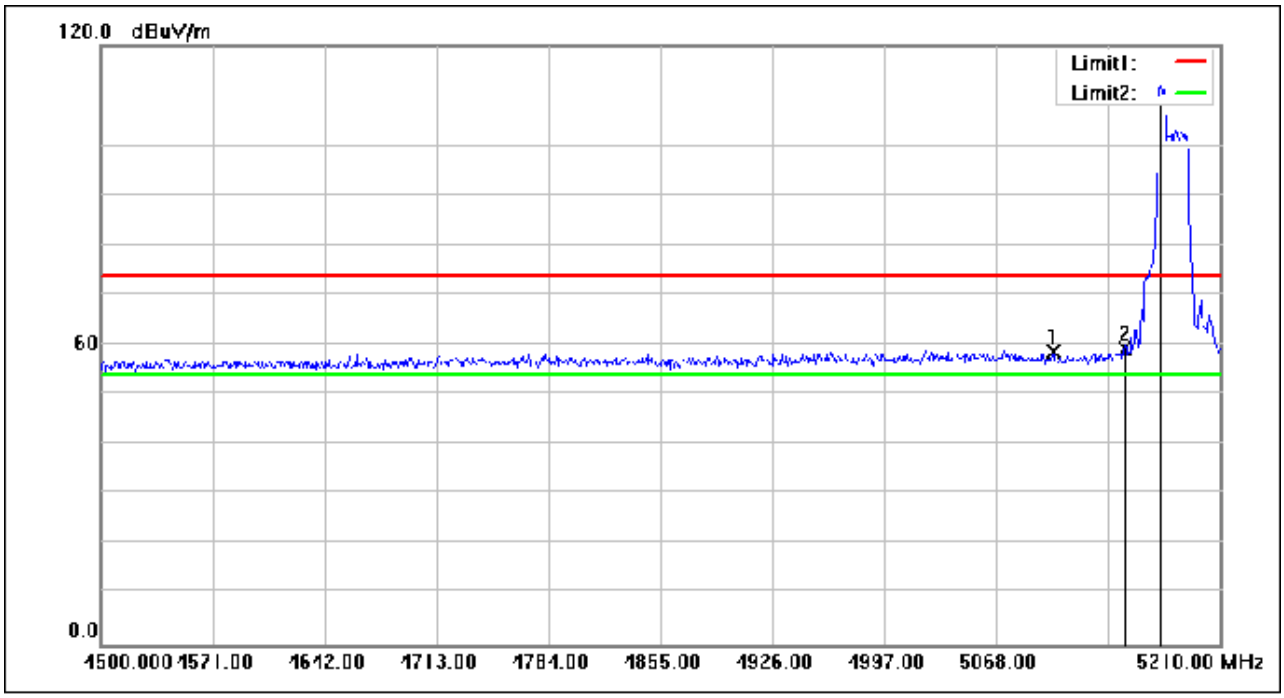


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5104.210	74.22	-15.59	58.63	74.00	-15.37	peak
2	5150.000	74.80	-15.49	59.31	74.00	-14.69	peak
3	5172.370	127.46	-15.47	111.99	74.00	37.99	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

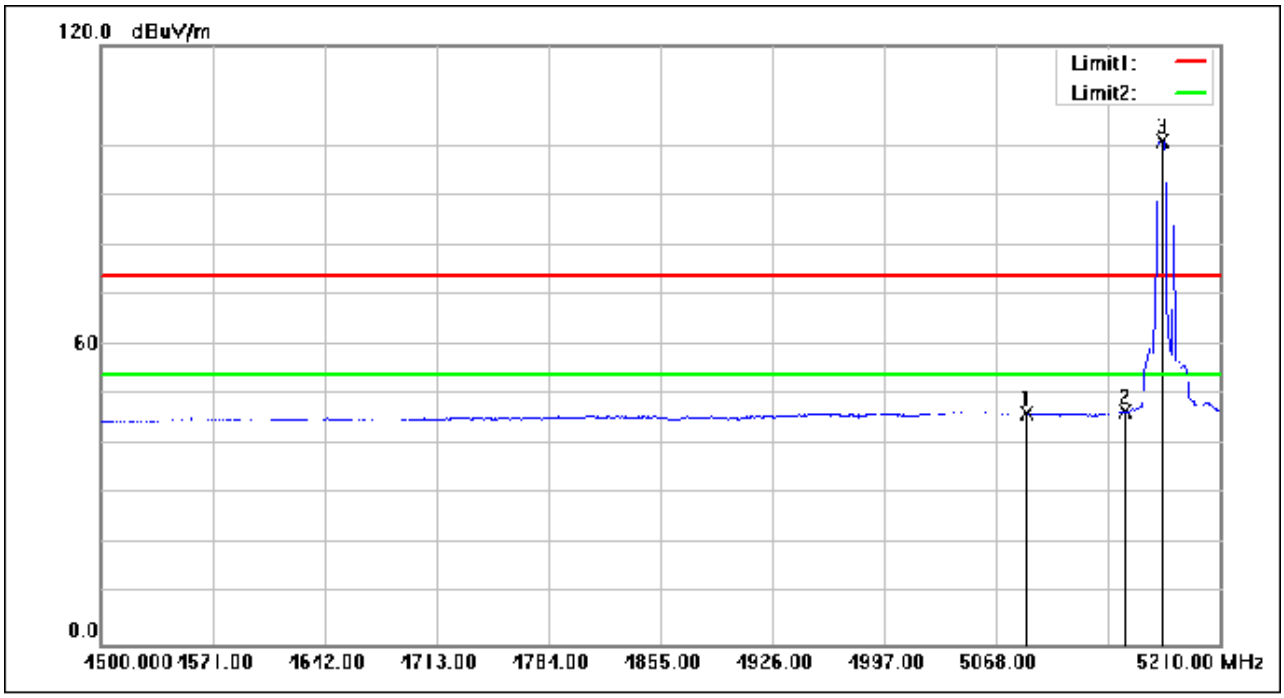


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.170	61.94	-15.63	46.31	54.00	-7.69	AVG
2	5150.000	62.15	-15.49	46.66	54.00	-7.34	AVG
3	5173.790	116.51	-15.46	101.05	54.00	47.05	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

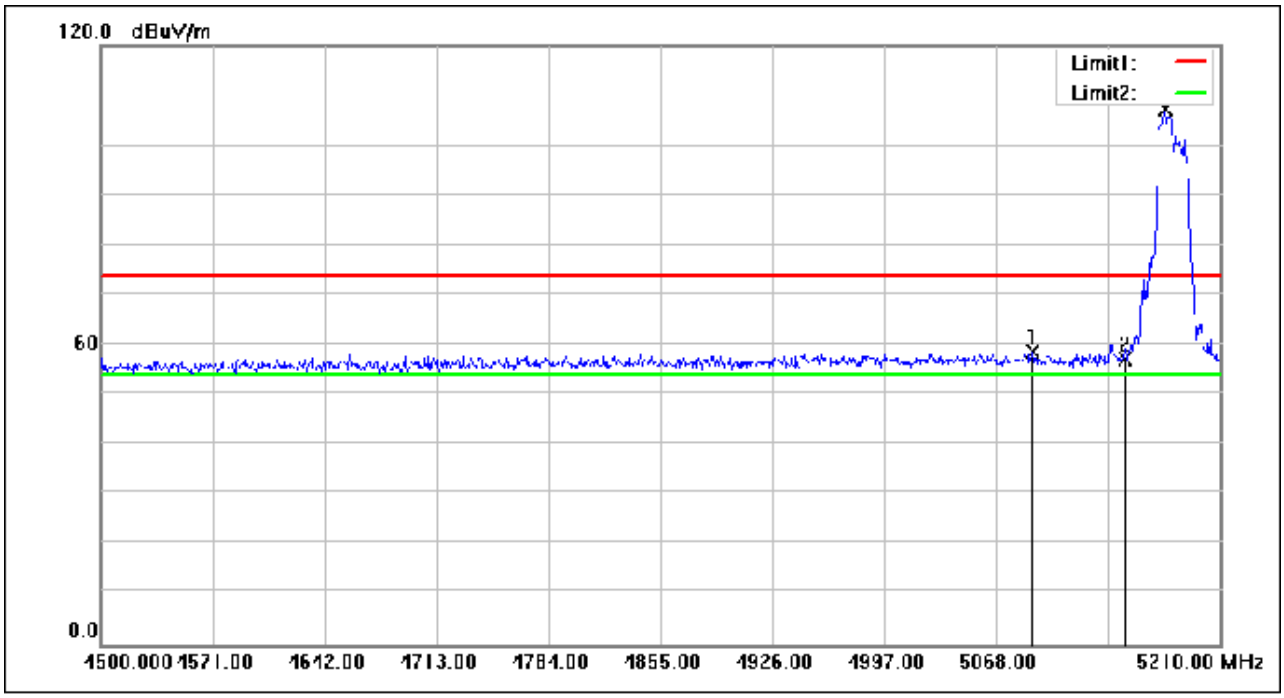


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5090.720	74.16	-15.62	58.54	74.00	-15.46	peak
2	5150.000	72.75	-15.49	57.26	74.00	-16.74	peak
3	5175.210	122.61	-15.46	107.15	74.00	33.15	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

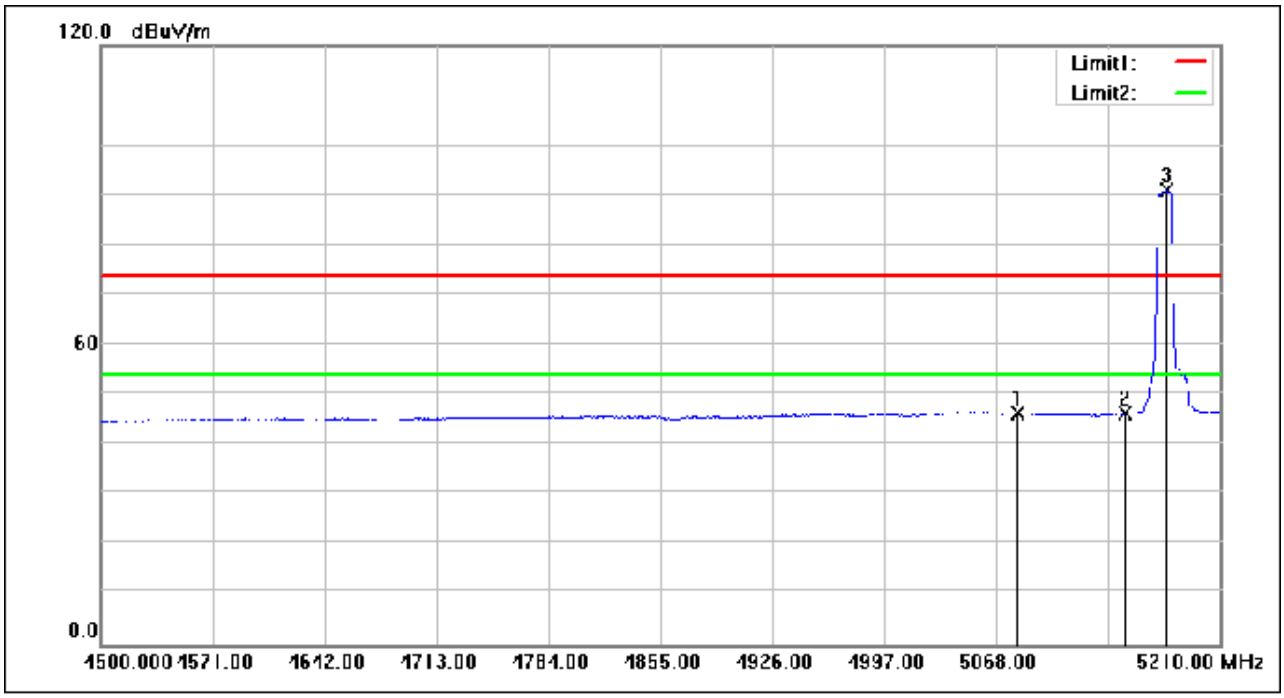


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5081.490	62.11	-15.64	46.47	54.00	-7.53	AVG
2	5150.000	61.72	-15.49	46.23	54.00	-7.77	AVG
3	5175.920	106.37	-15.46	90.91	54.00	36.91	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

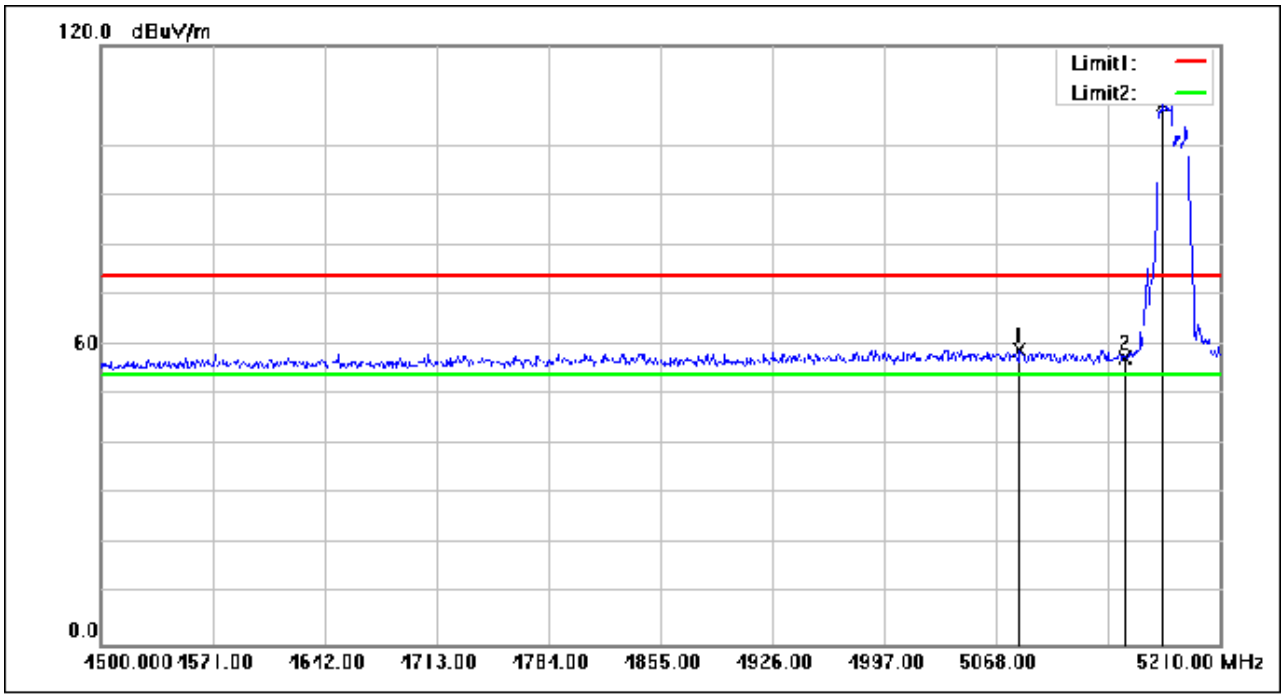


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5082.910	74.68	-15.64	59.04	74.00	-14.96	peak
2	5150.000	72.80	-15.49	57.31	74.00	-16.69	peak
3	5173.080	123.51	-15.46	108.05	74.00	34.05	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

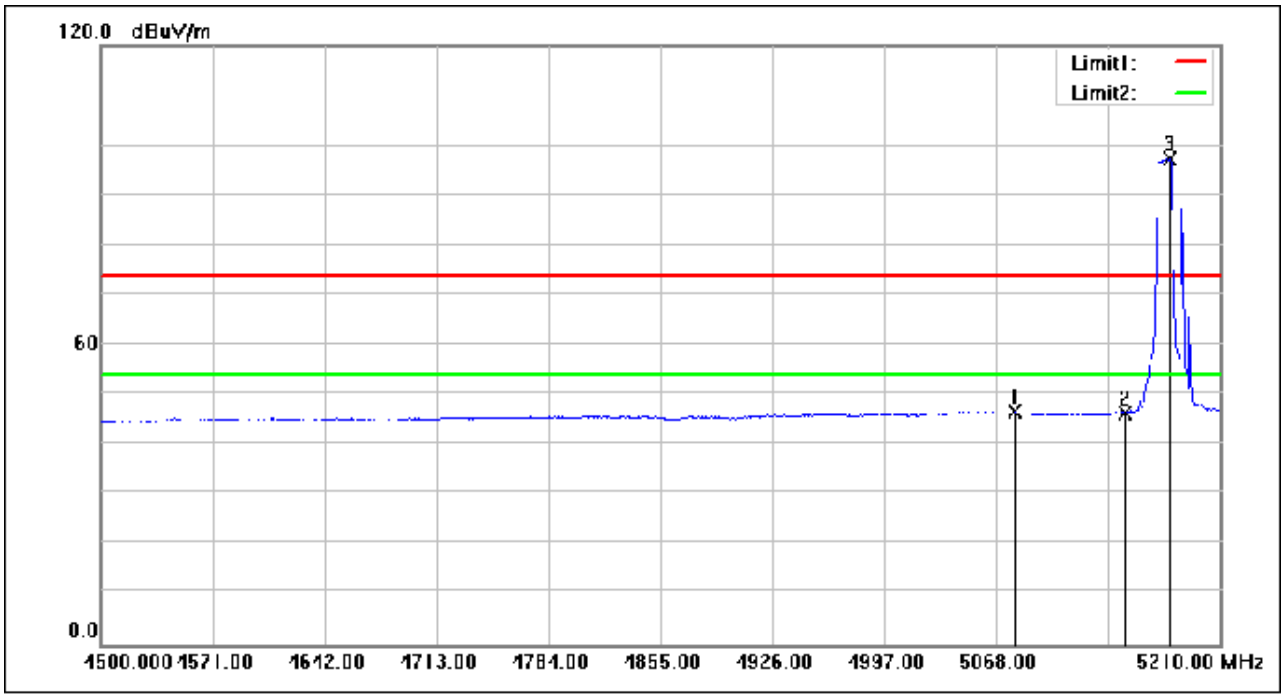


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5080.070	62.17	-15.64	46.53	54.00	-7.47	AVG
2	5150.000	61.94	-15.49	46.45	54.00	-7.55	AVG
3	5178.050	112.95	-15.46	97.49	54.00	43.49	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

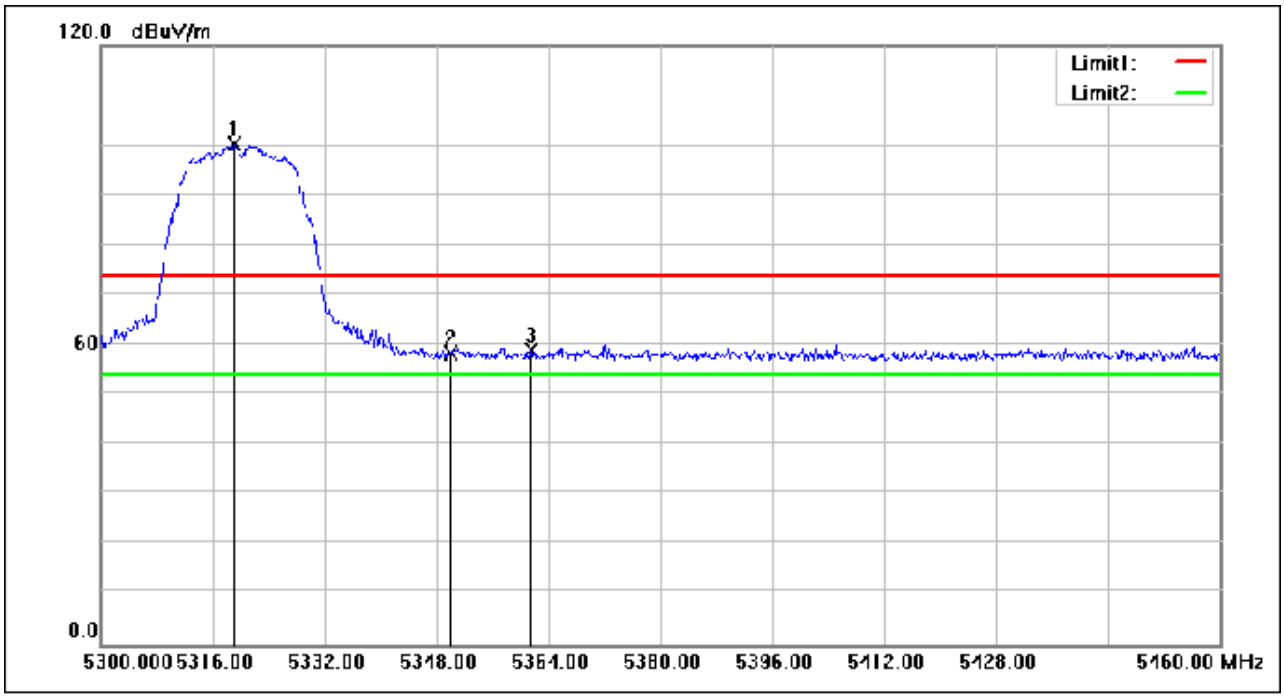


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.040	115.82	-15.46	100.36	74.00	26.36	peak
2	5350.000	73.83	-15.49	58.34	74.00	-15.66	peak
3	5361.440	74.38	-15.47	58.91	74.00	-15.09	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

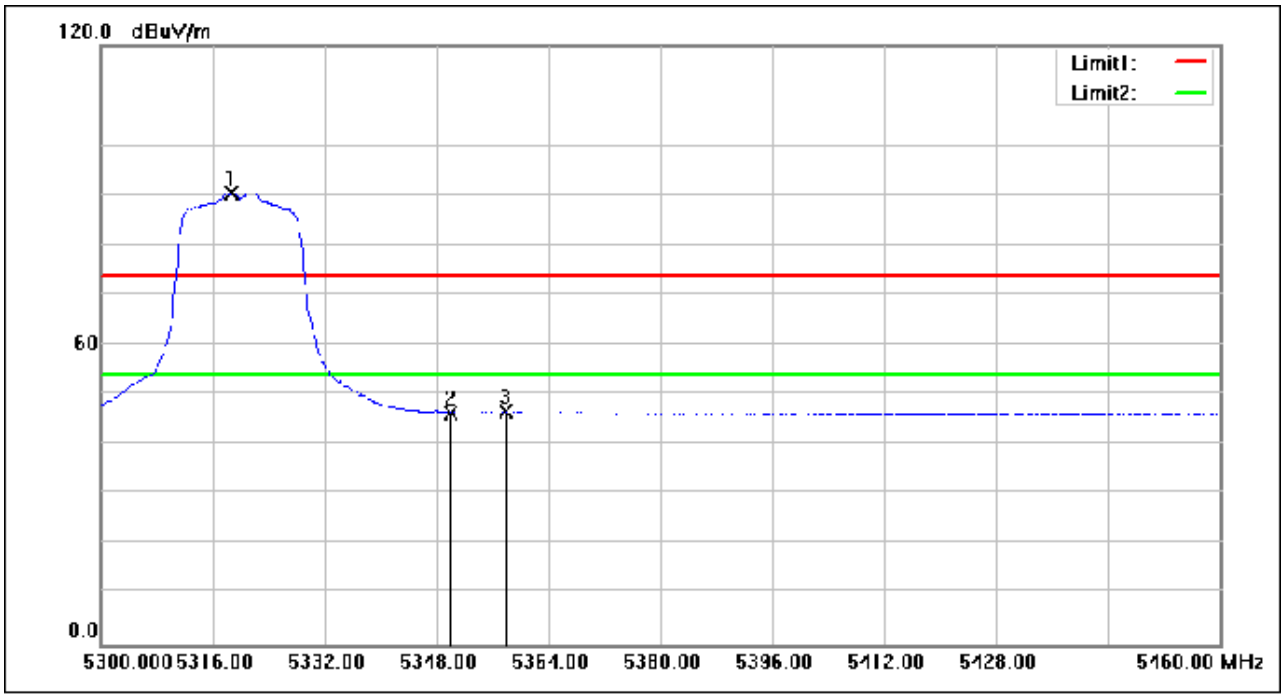


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.560	105.92	-15.46	90.46	54.00	36.46	AVG
2	5350.000	61.95	-15.49	46.46	54.00	-7.54	AVG
3	5357.920	62.12	-15.48	46.64	54.00	-7.36	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

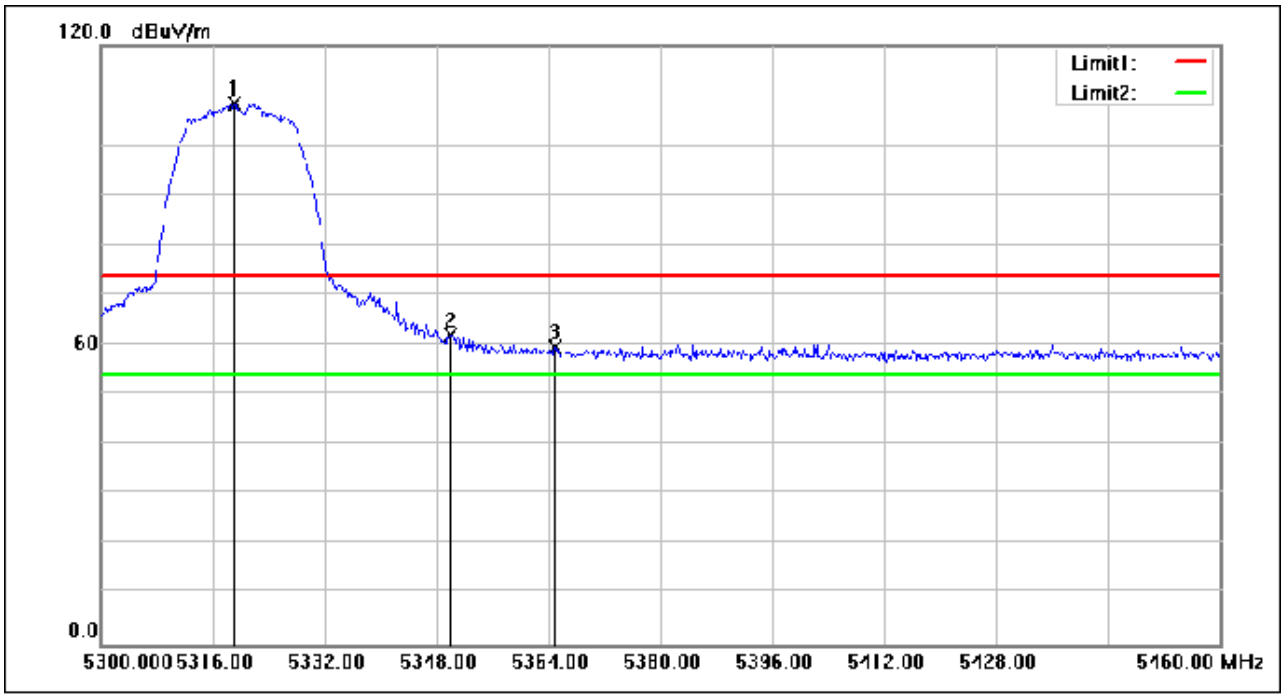


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.040	124.05	-15.46	108.59	74.00	34.59	peak
2	5350.000	77.39	-15.49	61.90	74.00	-12.10	peak
3	5364.960	75.01	-15.47	59.54	74.00	-14.46	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

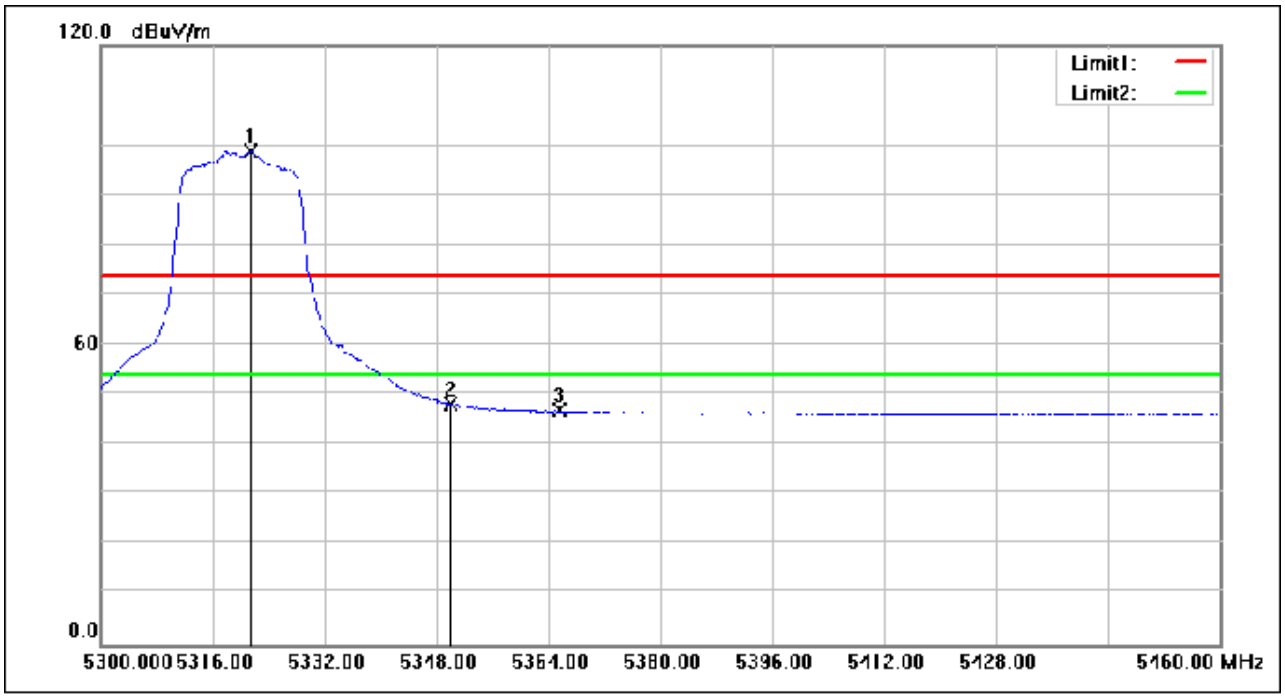


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.440	114.29	-15.46	98.83	54.00	44.83	AVG
2	5350.000	63.50	-15.49	48.01	54.00	-5.99	AVG
3	5365.600	62.38	-15.47	46.91	54.00	-7.09	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

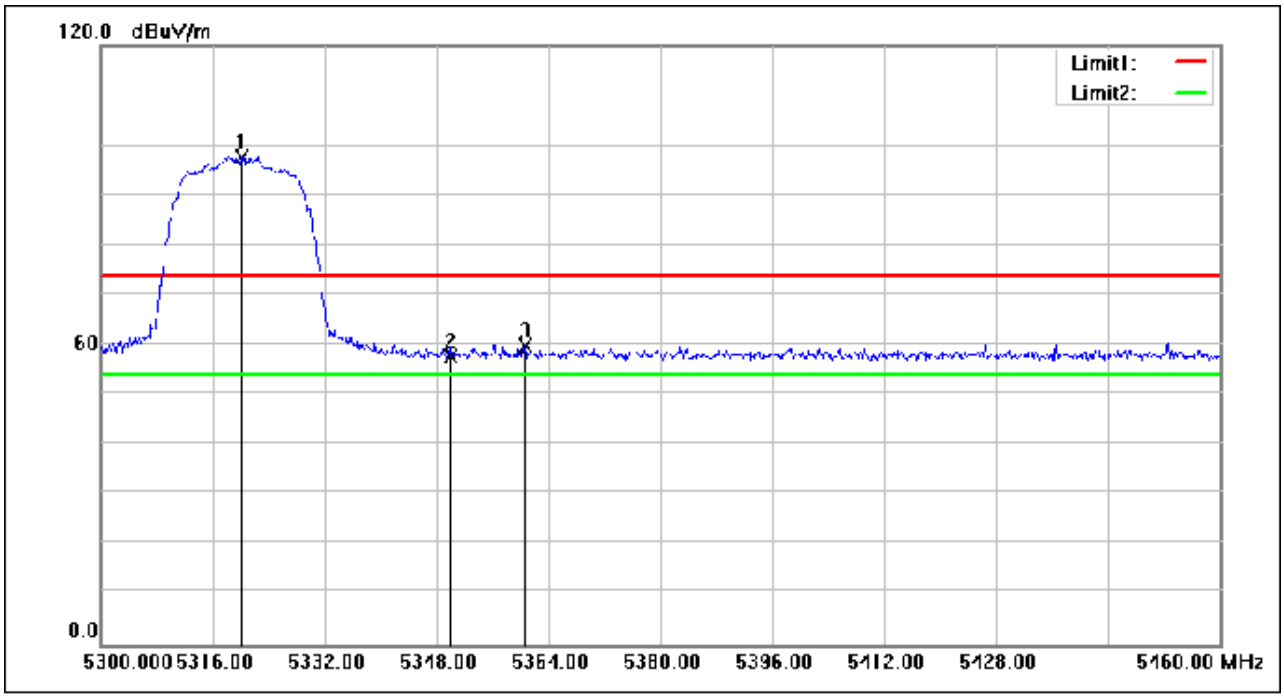


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5320.160	113.16	-15.46	97.70	74.00	23.70	peak
2	5350.000	73.16	-15.49	57.67	74.00	-16.33	peak
3	5360.640	75.46	-15.47	59.99	74.00	-14.01	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

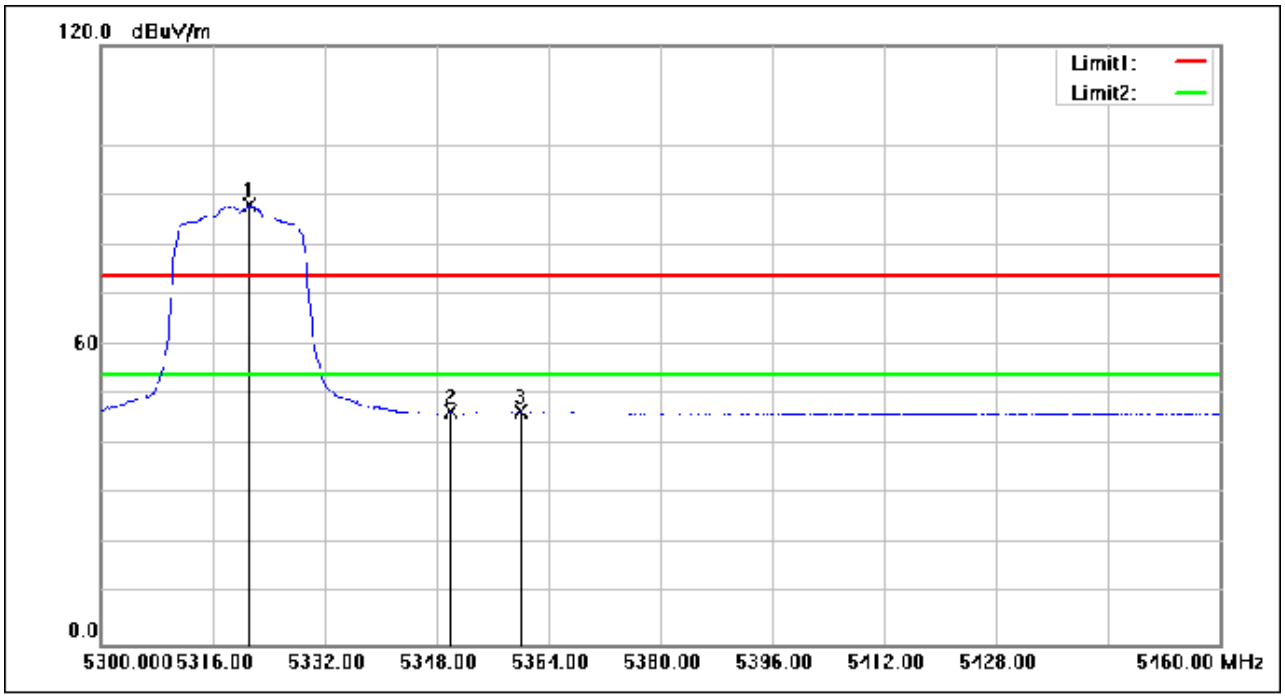


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.120	103.40	-15.46	87.94	54.00	33.94	AVG
2	5350.000	62.05	-15.49	46.56	54.00	-7.44	AVG
3	5360.000	62.03	-15.47	46.56	54.00	-7.44	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

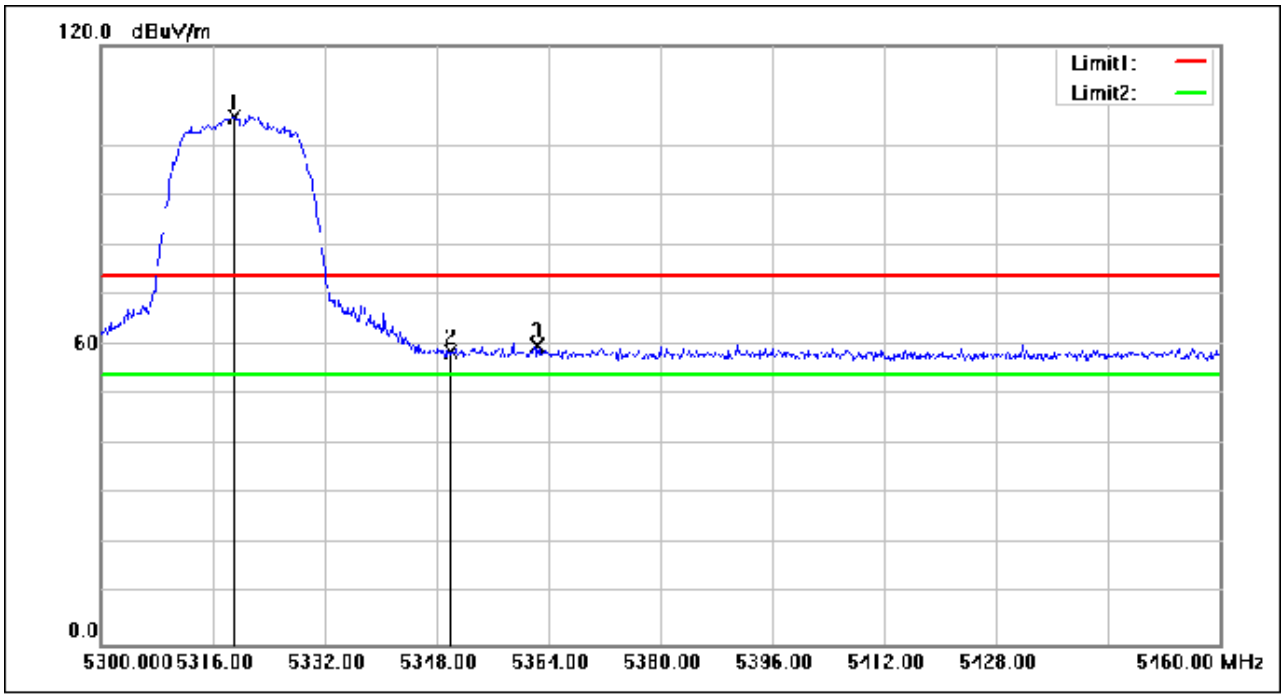


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.040	121.28	-15.46	105.82	74.00	31.82	peak
2	5350.000	74.15	-15.49	58.66	74.00	-15.34	peak
3	5362.400	75.24	-15.47	59.77	74.00	-14.23	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

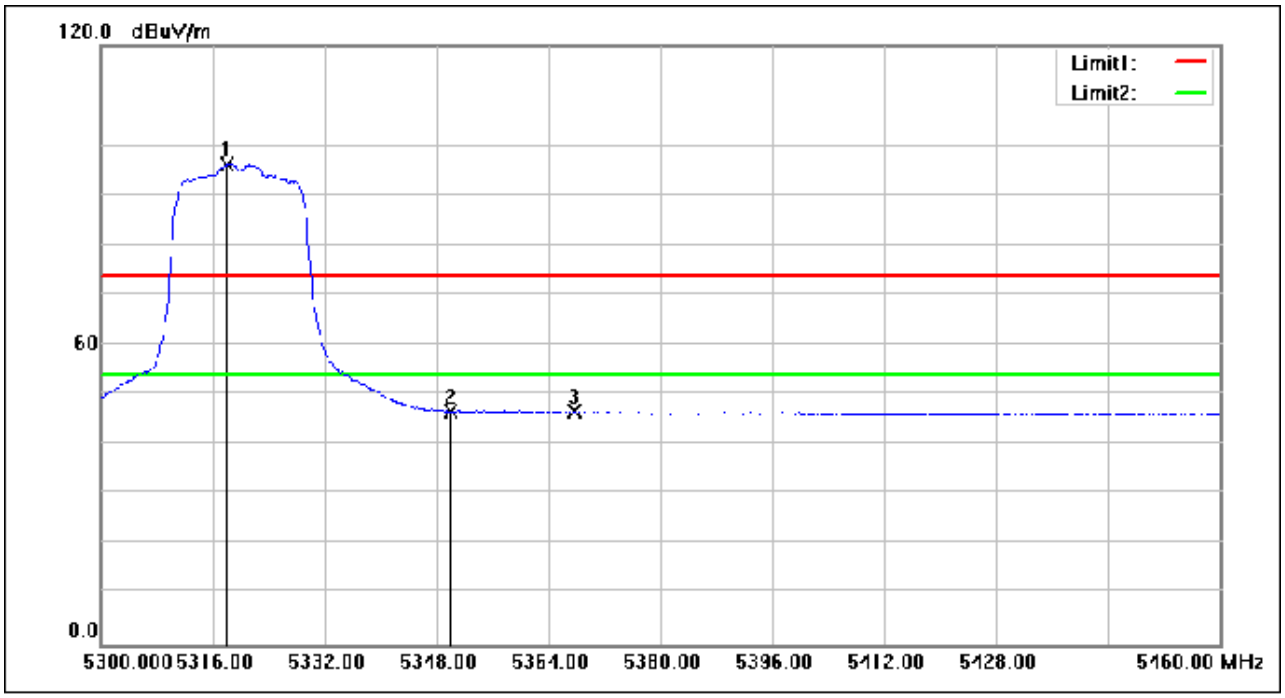


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5317.920	111.66	-15.46	96.20	54.00	42.20	AVG
2	5350.000	62.29	-15.49	46.80	54.00	-7.20	AVG
3	5367.680	62.11	-15.47	46.64	54.00	-7.36	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

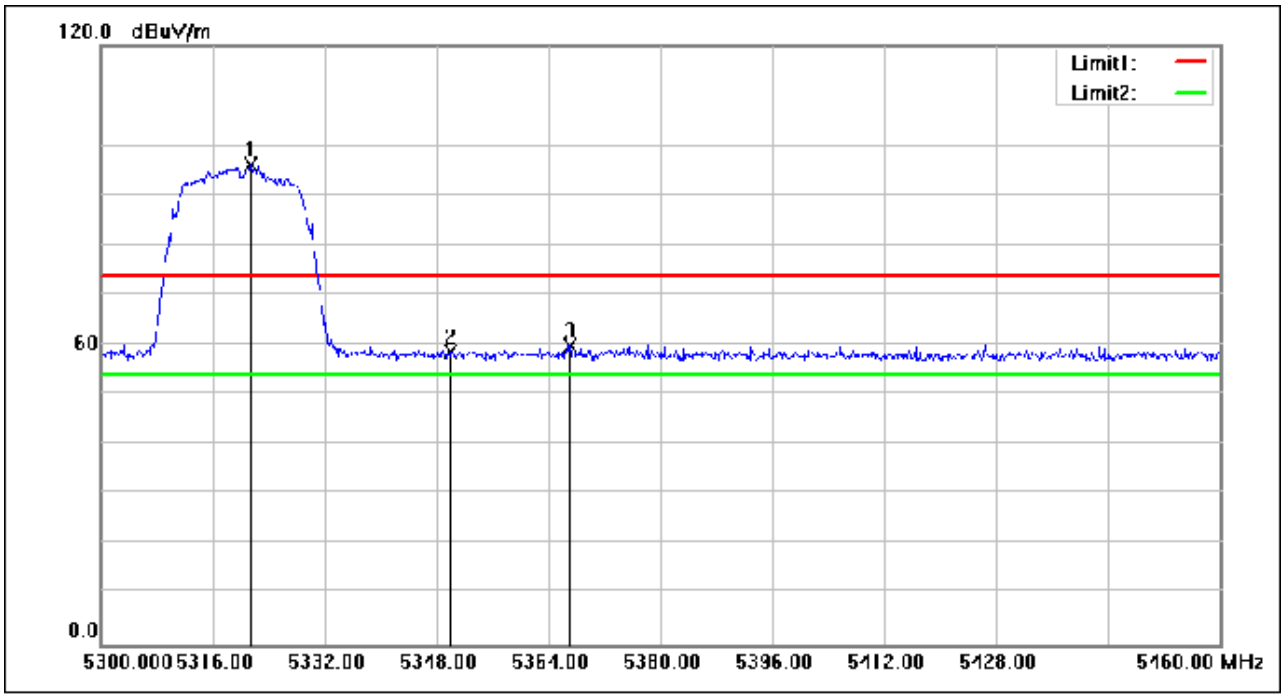


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.440	111.49	-15.46	96.03	74.00	22.03	peak
2	5350.000	74.02	-15.49	58.53	74.00	-15.47	peak
3	5367.040	75.43	-15.47	59.96	74.00	-14.04	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

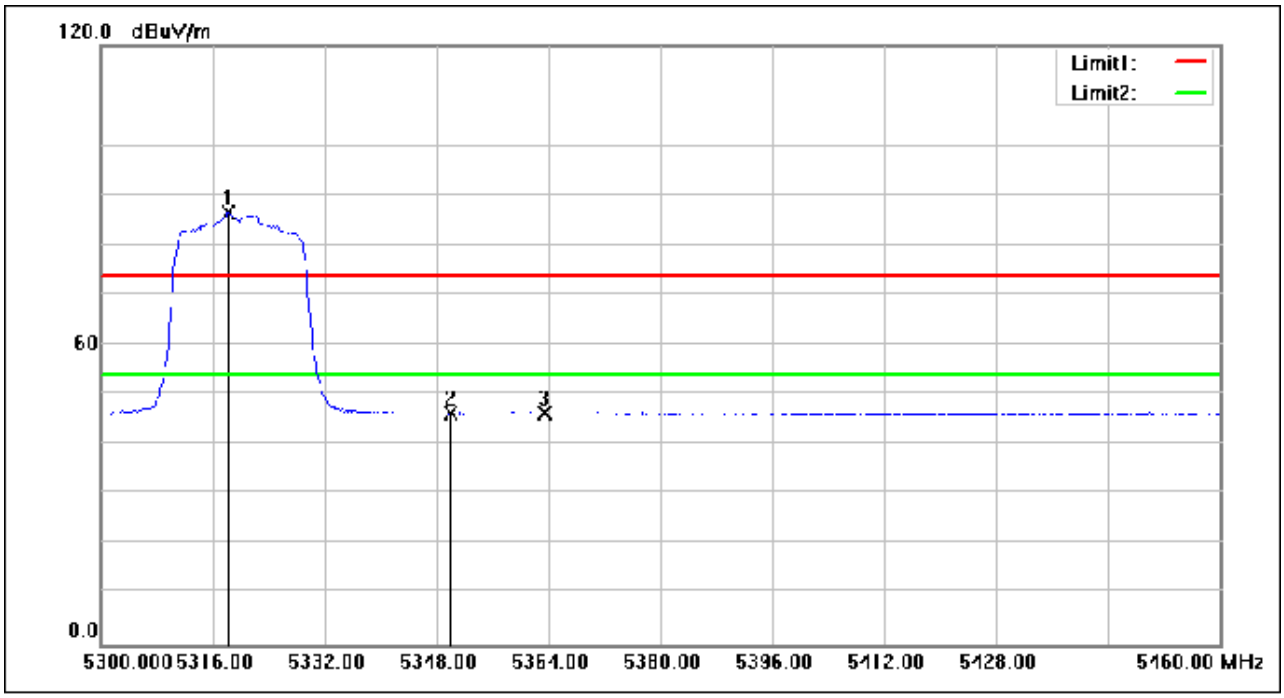


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.240	101.92	-15.46	86.46	54.00	32.46	AVG
2	5350.000	61.80	-15.49	46.31	54.00	-7.69	AVG
3	5363.520	61.95	-15.47	46.48	54.00	-7.52	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

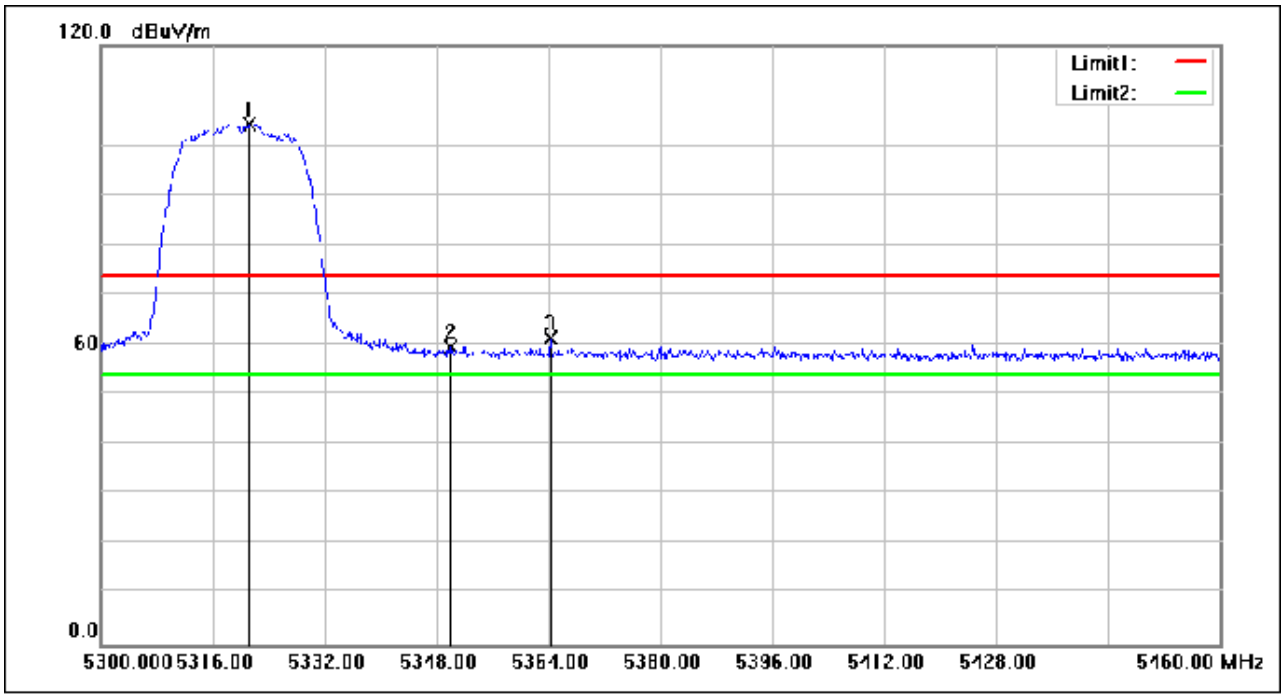


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.280	119.84	-15.46	104.38	74.00	30.38	peak
2	5350.000	74.94	-15.49	59.45	74.00	-14.55	peak
3	5364.320	76.67	-15.47	61.20	74.00	-12.80	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

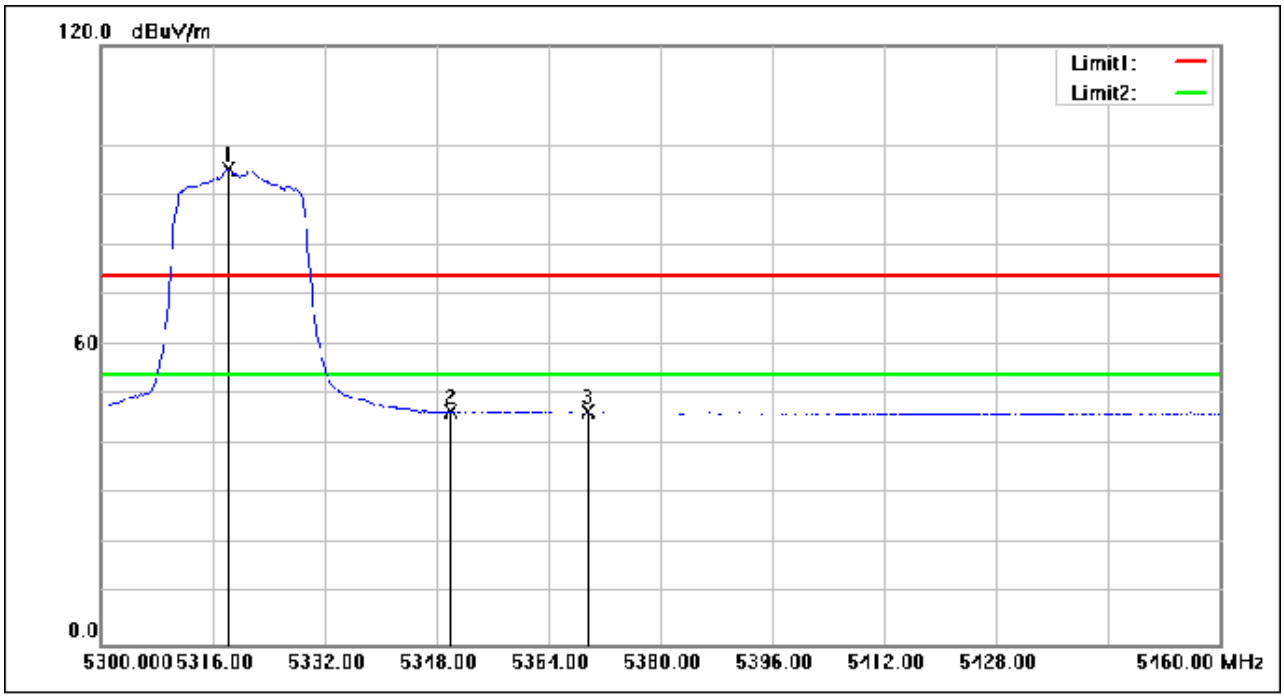


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.240	110.61	-15.46	95.15	54.00	41.15	AVG
2	5350.000	62.05	-15.49	46.56	54.00	-7.44	AVG
3	5369.600	62.01	-15.45	46.56	54.00	-7.44	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

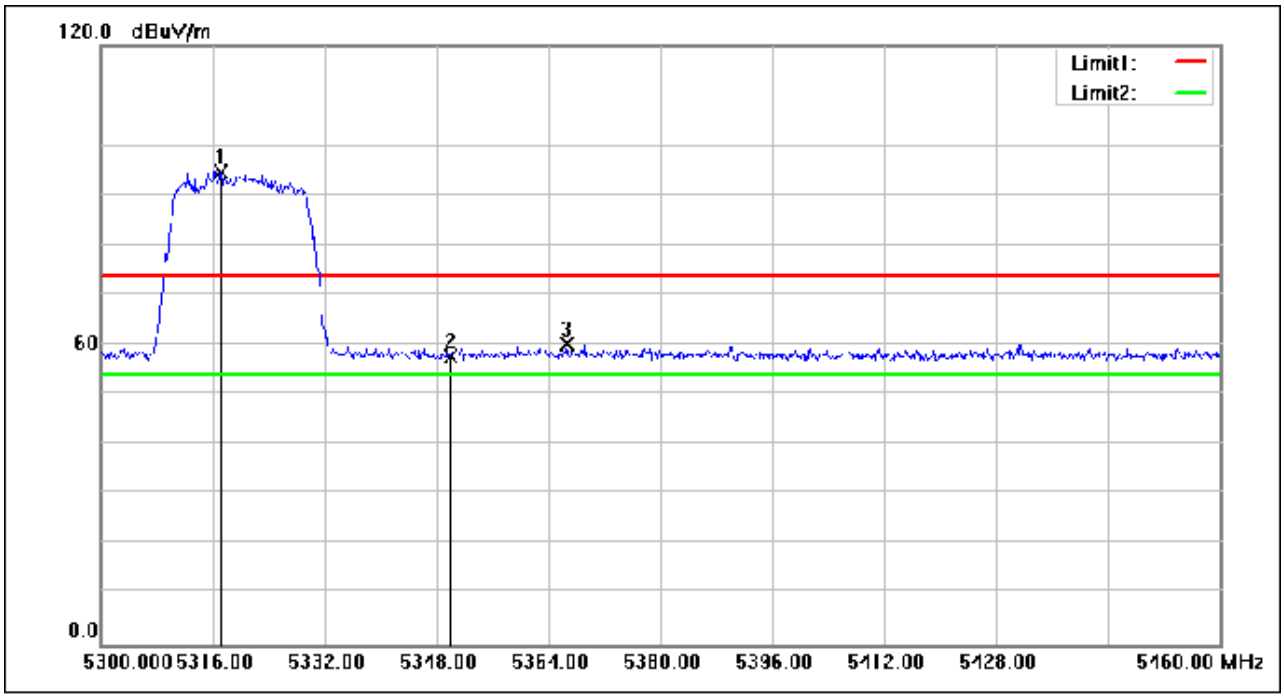


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5317.120	110.11	-15.45	94.66	54.00	40.66	AVG
2	5350.000	73.37	-15.49	57.88	54.00	3.88	AVG
3	5366.560	75.67	-15.47	60.20	54.00	6.20	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

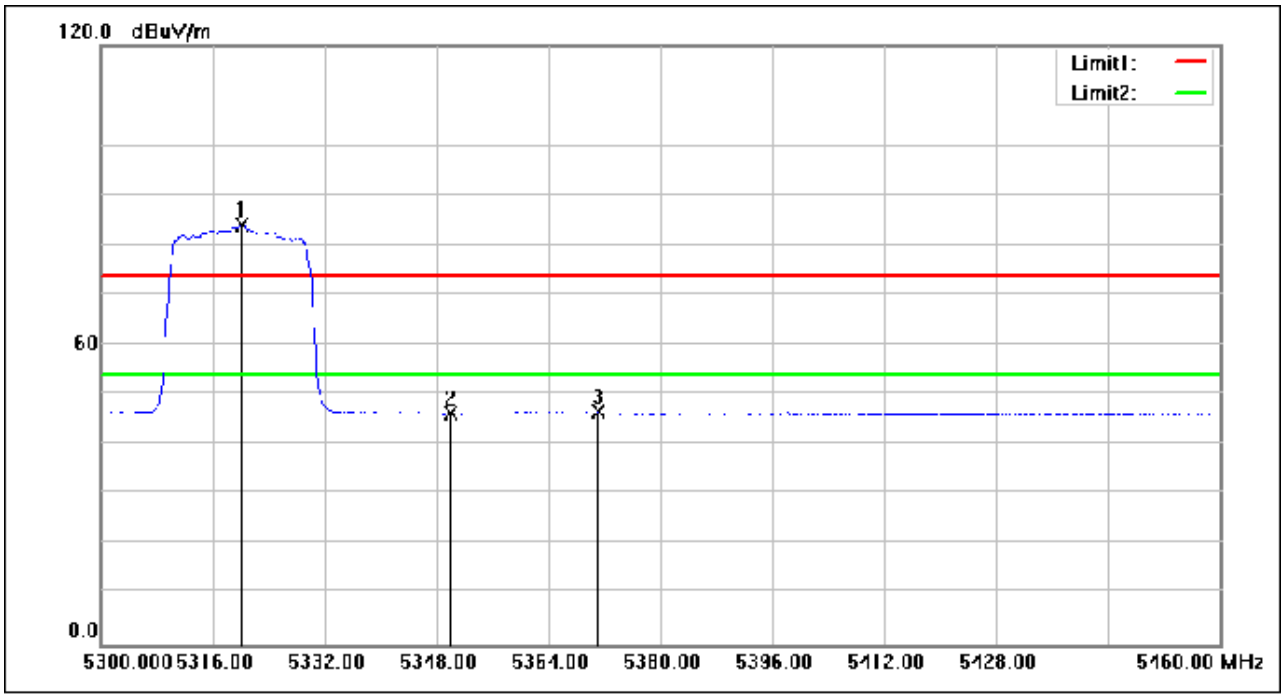


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5320.160	99.57	-15.46	84.11	54.00	30.11	AVG
2	5350.000	61.76	-15.49	46.27	54.00	-7.73	AVG
3	5371.040	62.07	-15.45	46.62	54.00	-7.38	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

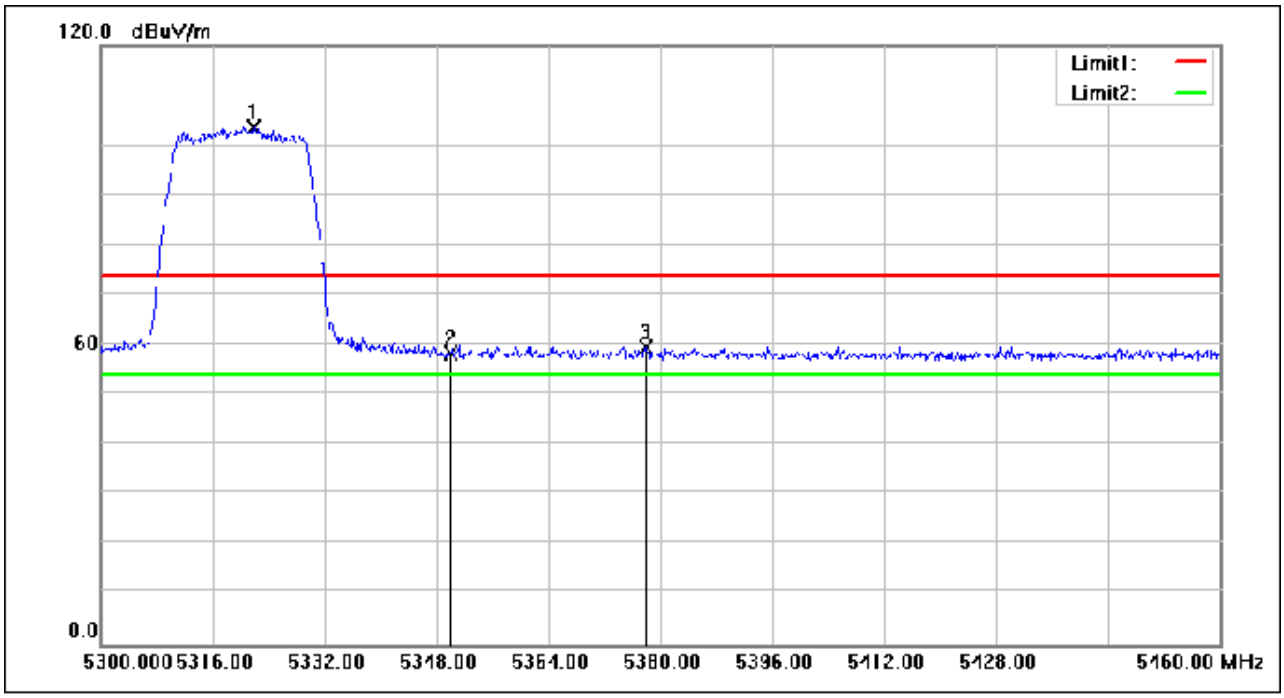


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.760	119.09	-15.46	103.63	74.00	29.63	peak
2	5350.000	73.75	-15.49	58.26	74.00	-15.74	peak
3	5377.920	74.96	-15.45	59.51	74.00	-14.49	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

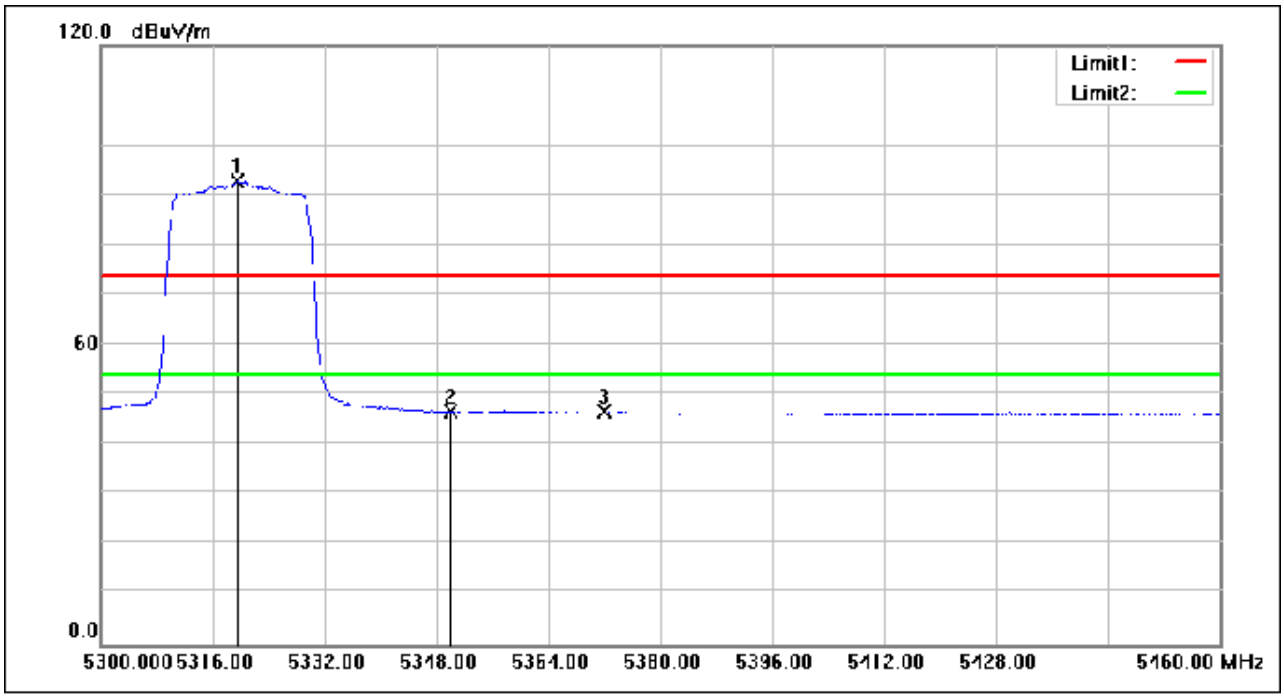


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.520	108.20	-15.46	92.74	54.00	38.74	AVG
2	5350.000	62.04	-15.49	46.55	54.00	-7.45	AVG
3	5372.000	62.05	-15.45	46.60	54.00	-7.40	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

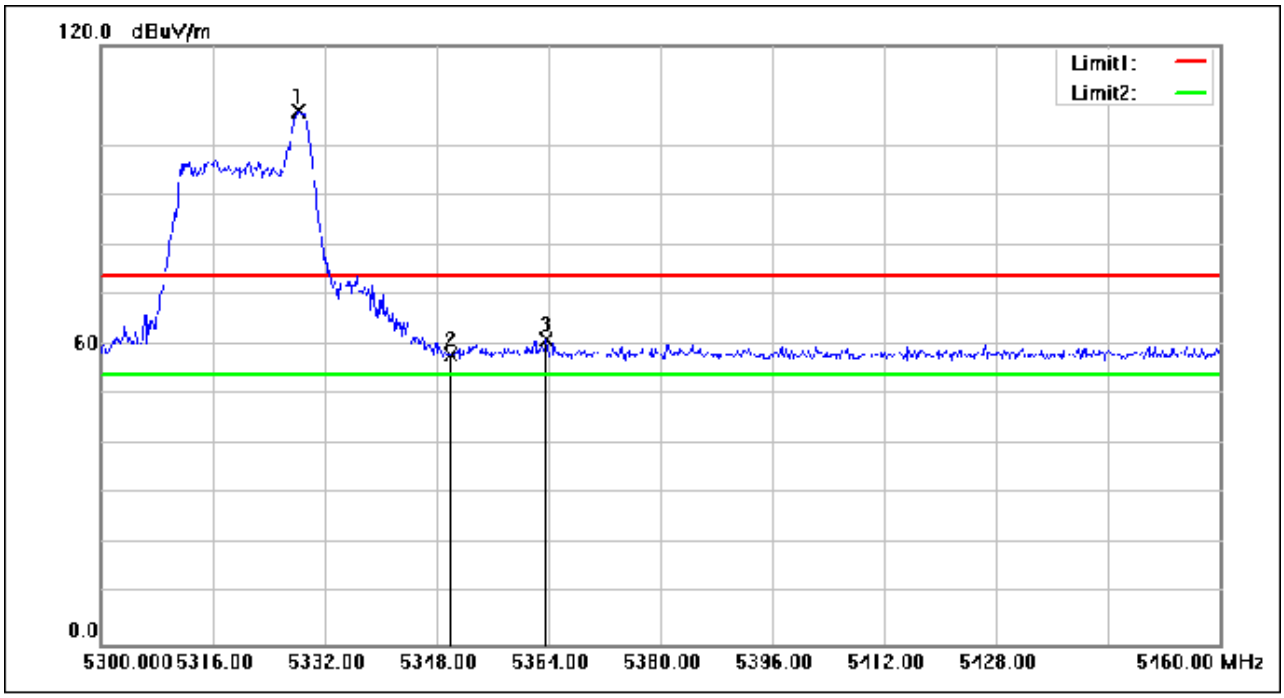


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.320	122.36	-15.47	106.89	74.00	32.89	peak
2	5350.000	73.53	-15.49	58.04	74.00	-15.96	peak
3	5363.680	76.52	-15.47	61.05	74.00	-12.95	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

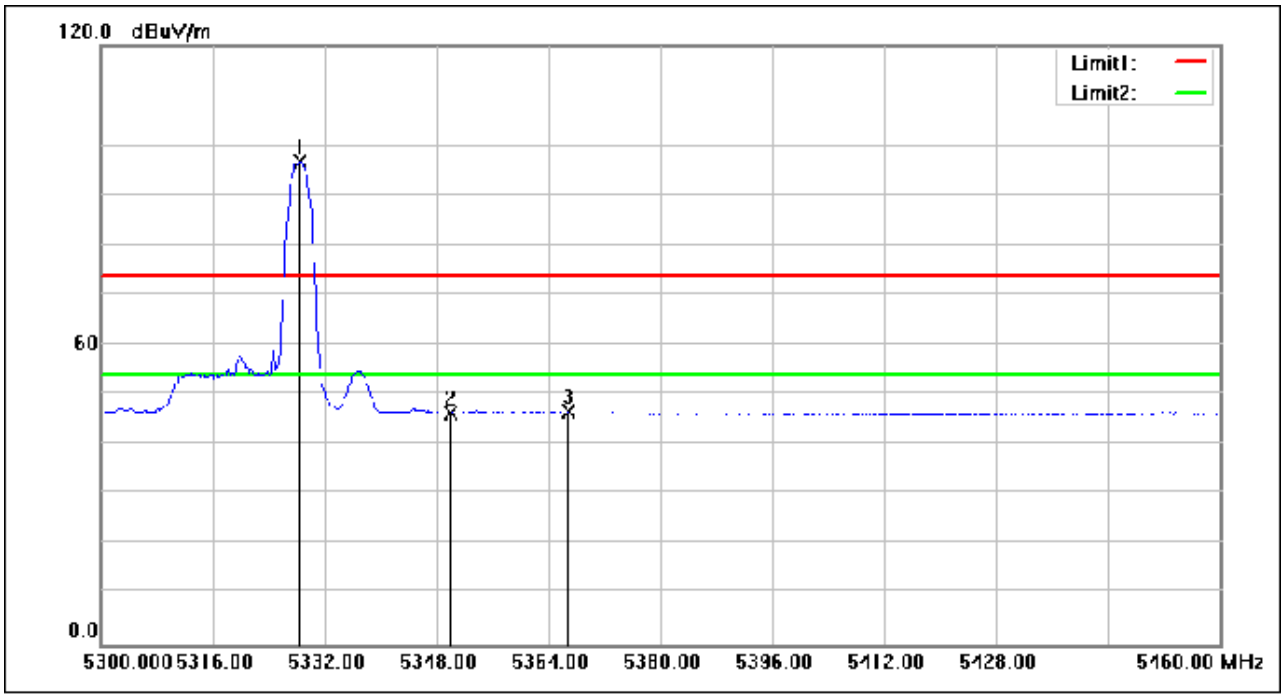


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	112.19	-15.47	96.72	54.00	42.72	AVG
2	5350.000	61.88	-15.49	46.39	54.00	-7.61	AVG
3	5366.880	62.10	-15.47	46.63	54.00	-7.37	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

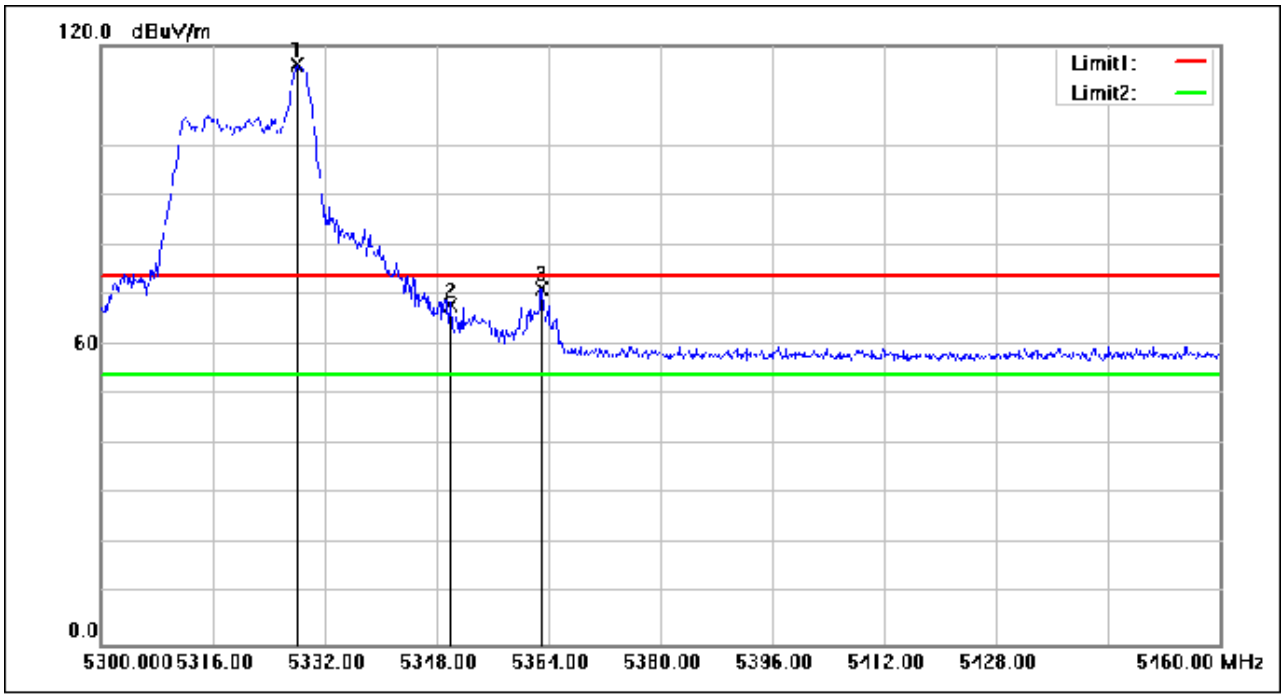


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.000	131.74	-15.47	116.27	74.00	42.27	peak
2	5350.000	83.50	-15.49	68.01	74.00	-5.99	peak
3	5363.040	86.66	-15.47	71.19	74.00	-2.81	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

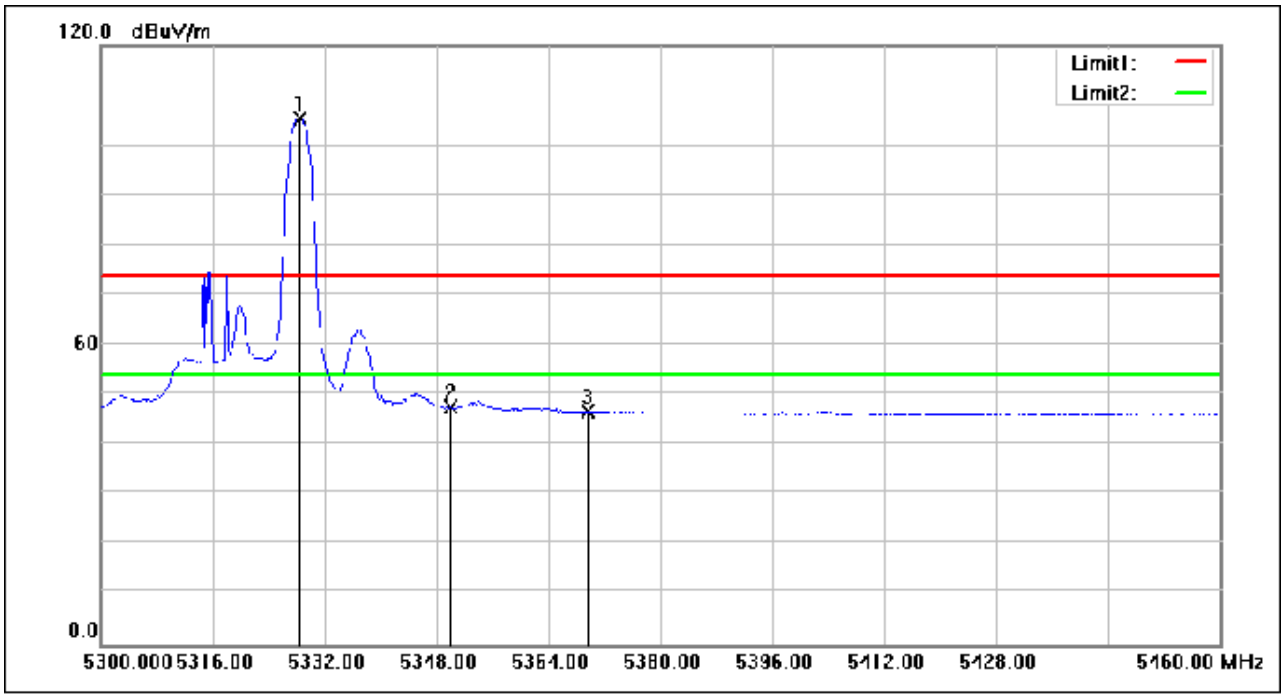


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	121.05	-15.47	105.58	54.00	51.58	AVG
2	5350.000	62.94	-15.49	47.45	54.00	-6.55	AVG
3	5369.600	62.20	-15.45	46.75	54.00	-7.25	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

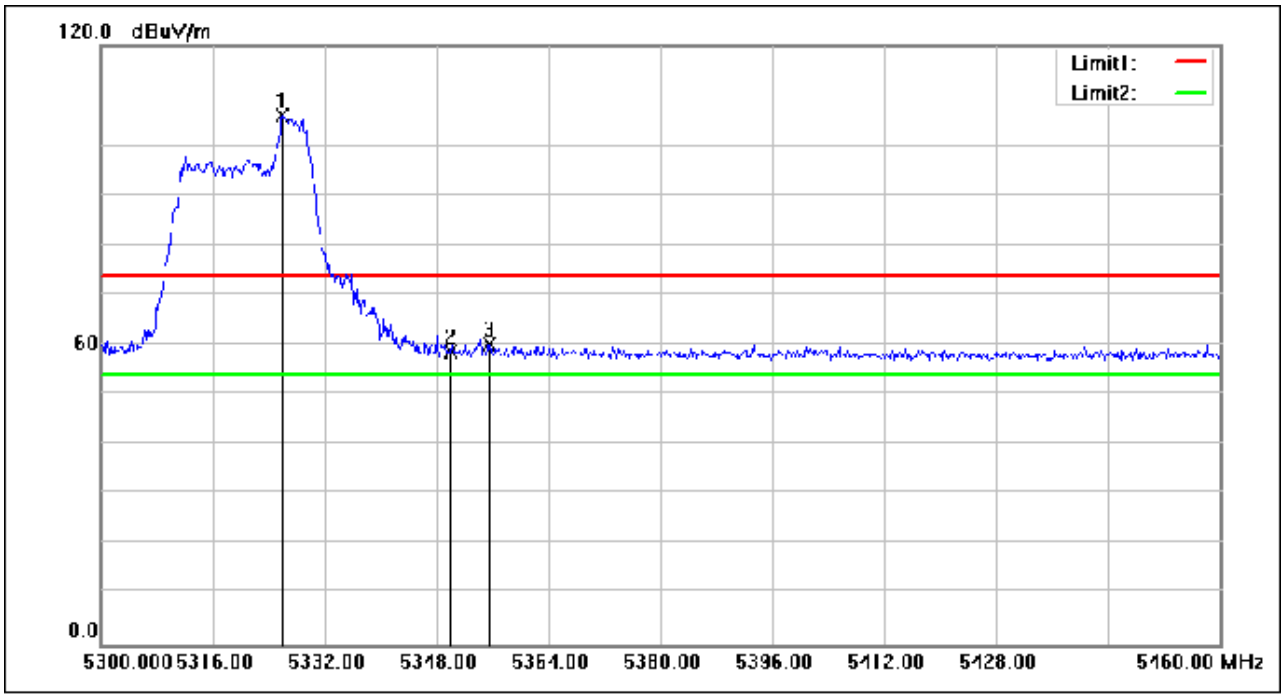


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5325.920	121.48	-15.47	106.01	74.00	32.01	peak
2	5350.000	74.26	-15.49	58.77	74.00	-15.23	peak
3	5355.520	75.55	-15.49	60.06	74.00	-13.94	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

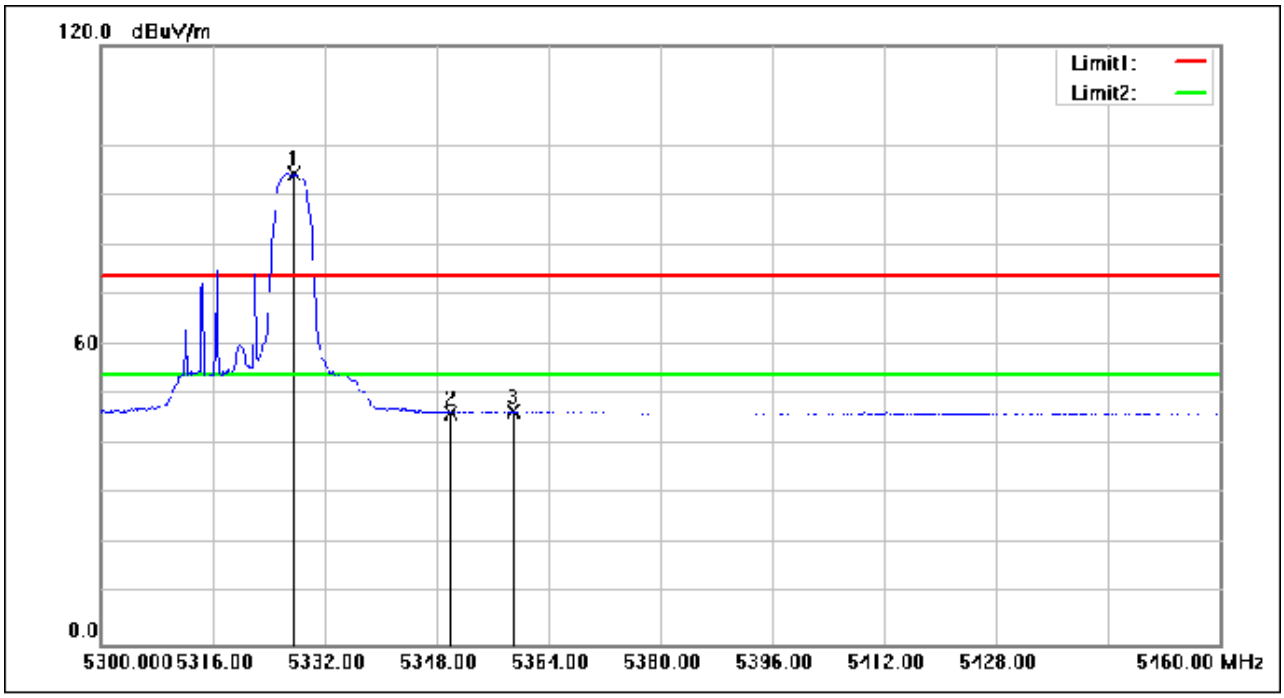


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.680	109.87	-15.47	94.40	54.00	40.40	AVG
2	5350.000	61.97	-15.49	46.48	54.00	-7.52	AVG
3	5358.880	62.11	-15.47	46.64	54.00	-7.36	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

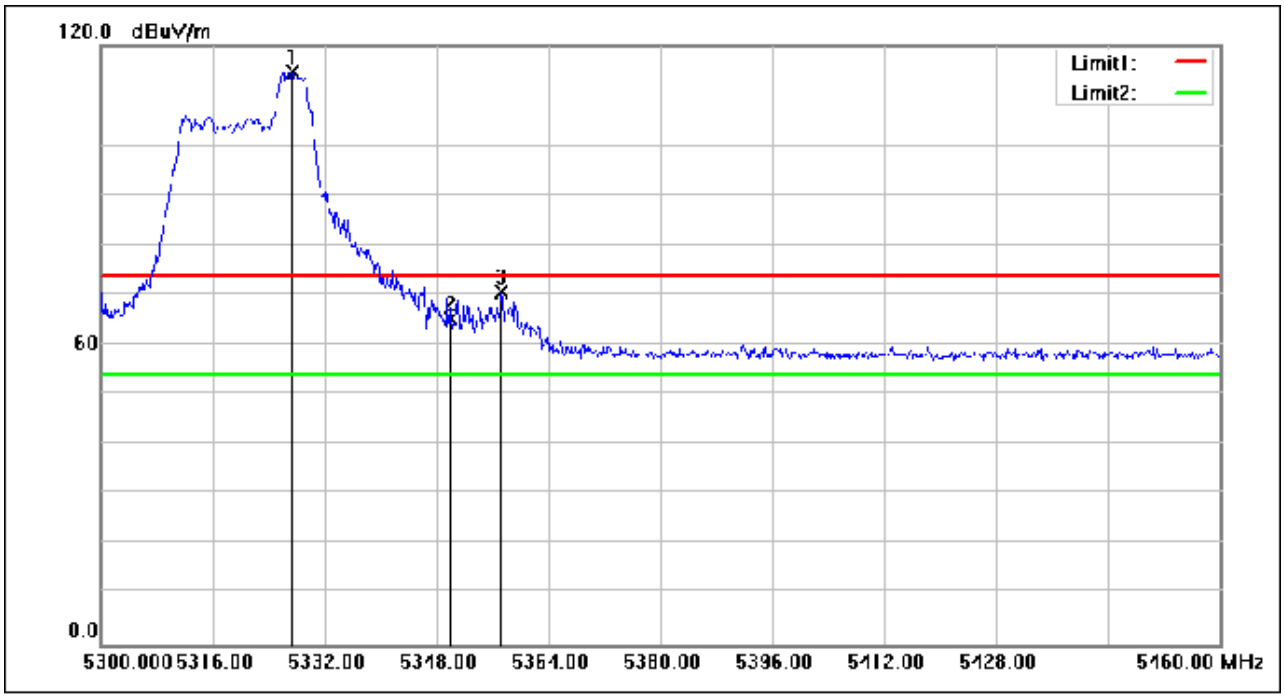


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.360	130.20	-15.46	114.74	74.00	40.74	peak
2	5350.000	80.65	-15.49	65.16	74.00	-8.84	peak
3	5357.280	86.25	-15.48	70.77	74.00	-3.23	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

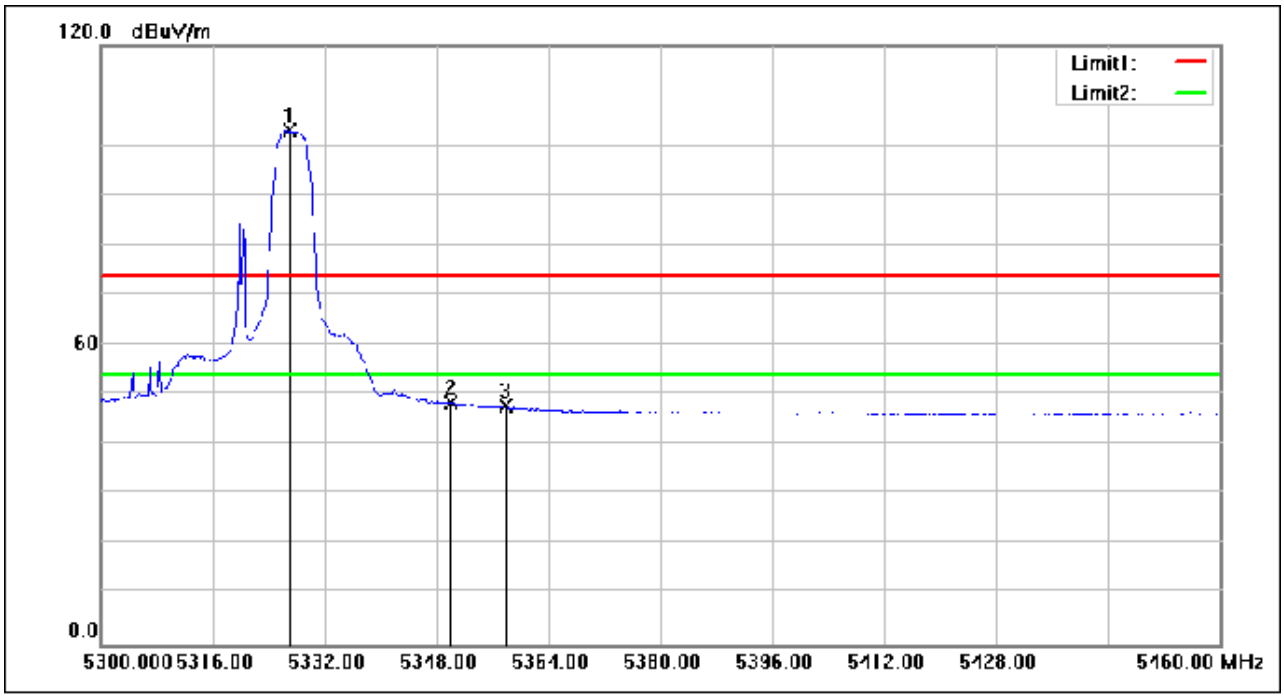


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.040	118.47	-15.47	103.00	54.00	49.00	AVG
2	5350.000	63.83	-15.49	48.34	54.00	-5.66	AVG
3	5357.920	63.19	-15.48	47.71	54.00	-6.29	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

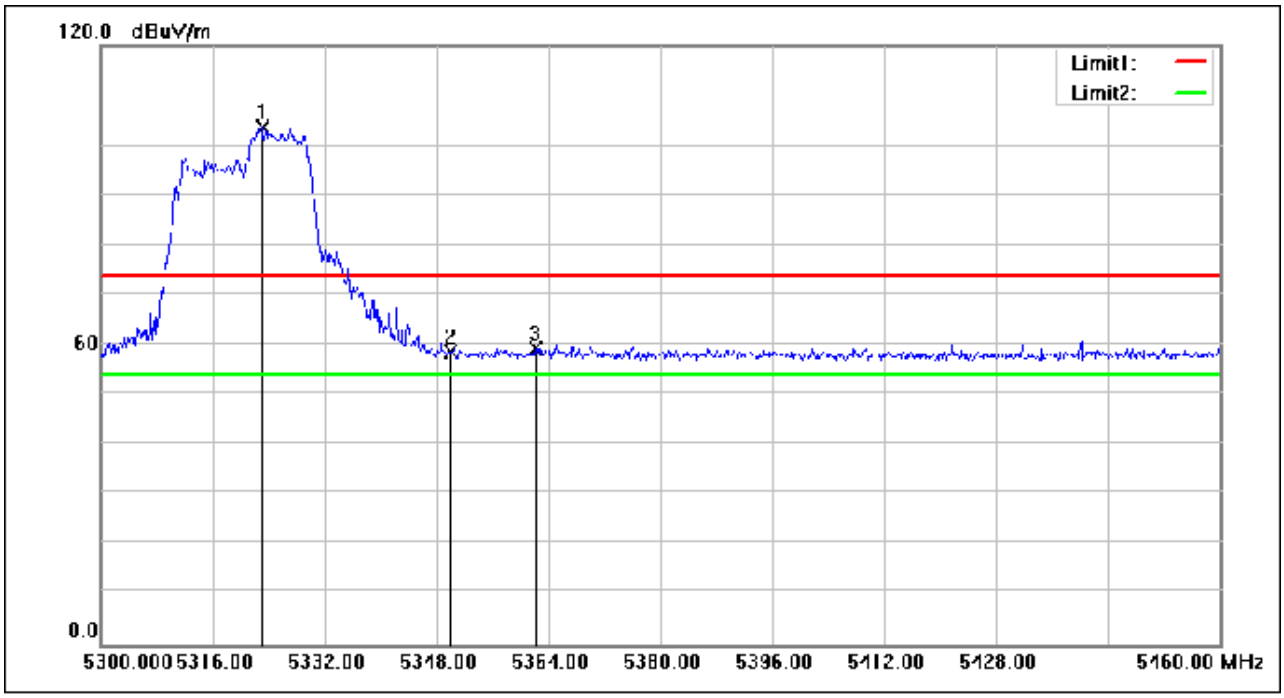


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.040	119.13	-15.47	103.66	74.00	29.66	peak
2	5350.000	74.20	-15.49	58.71	74.00	-15.29	peak
3	5362.080	74.70	-15.47	59.23	74.00	-14.77	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

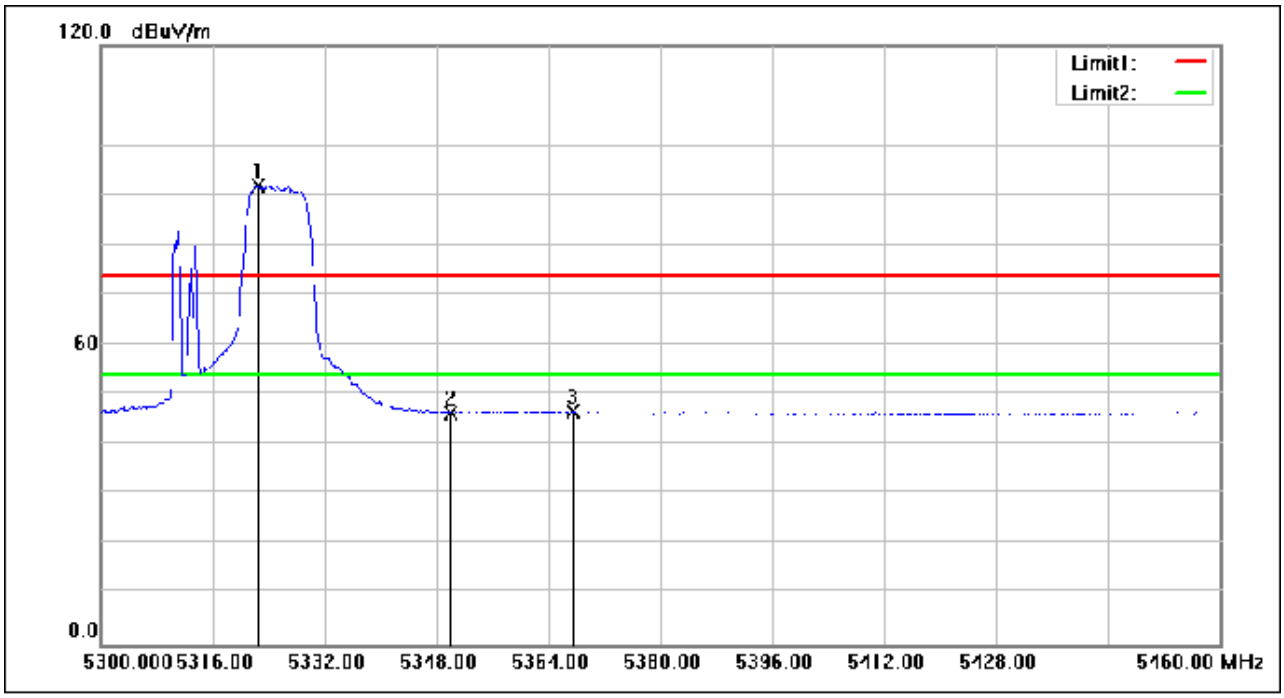


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.400	107.47	-15.46	92.01	54.00	38.01	AVG
2	5350.000	61.88	-15.49	46.39	54.00	-7.61	AVG
3	5367.520	62.08	-15.47	46.61	54.00	-7.39	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

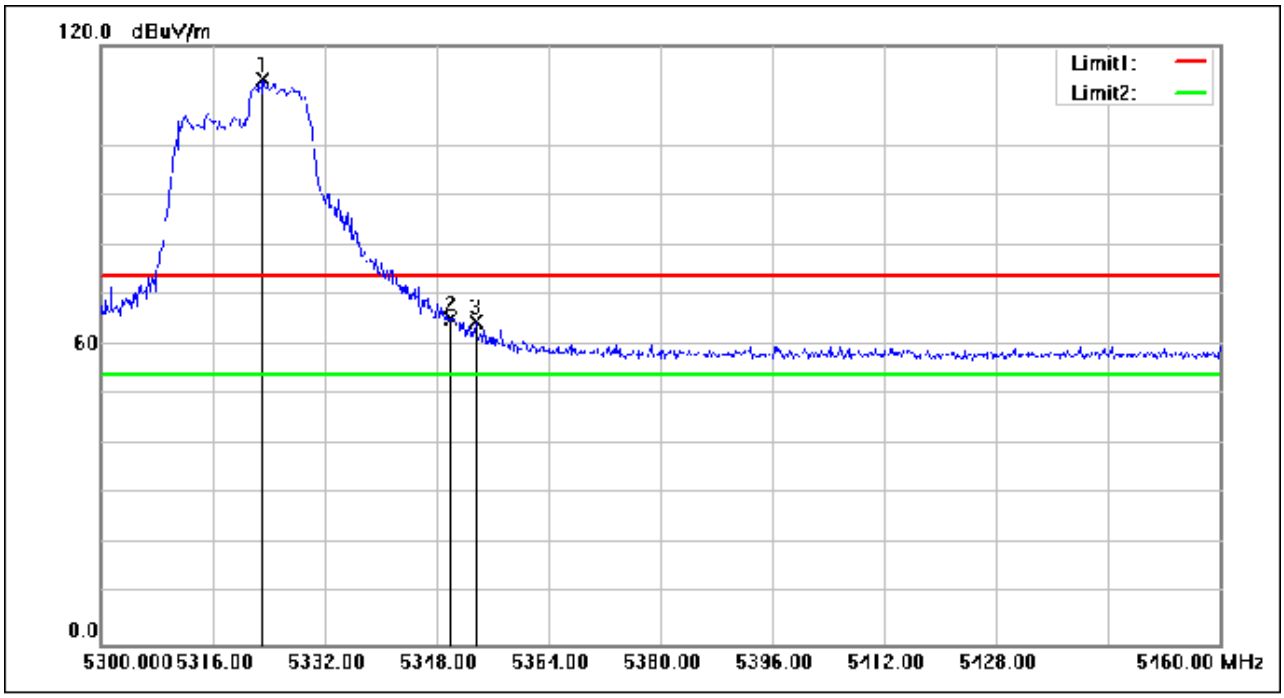


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.200	128.59	-15.47	113.12	74.00	39.12	peak
2	5350.000	80.83	-15.49	65.34	74.00	-8.66	peak
3	5353.600	80.27	-15.49	64.78	74.00	-9.22	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

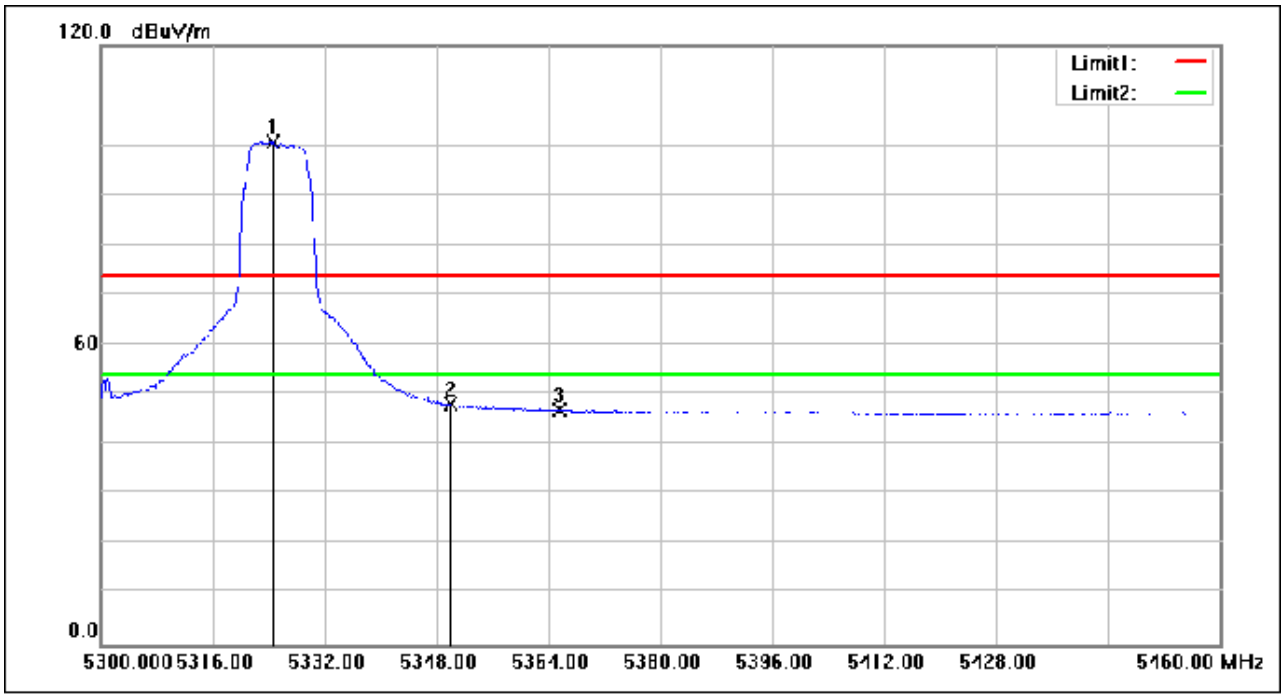


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5324.640	116.19	-15.47	100.72	54.00	46.72	AVG
2	5350.000	63.56	-15.49	48.07	54.00	-5.93	AVG
3	5365.600	62.56	-15.47	47.09	54.00	-6.91	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

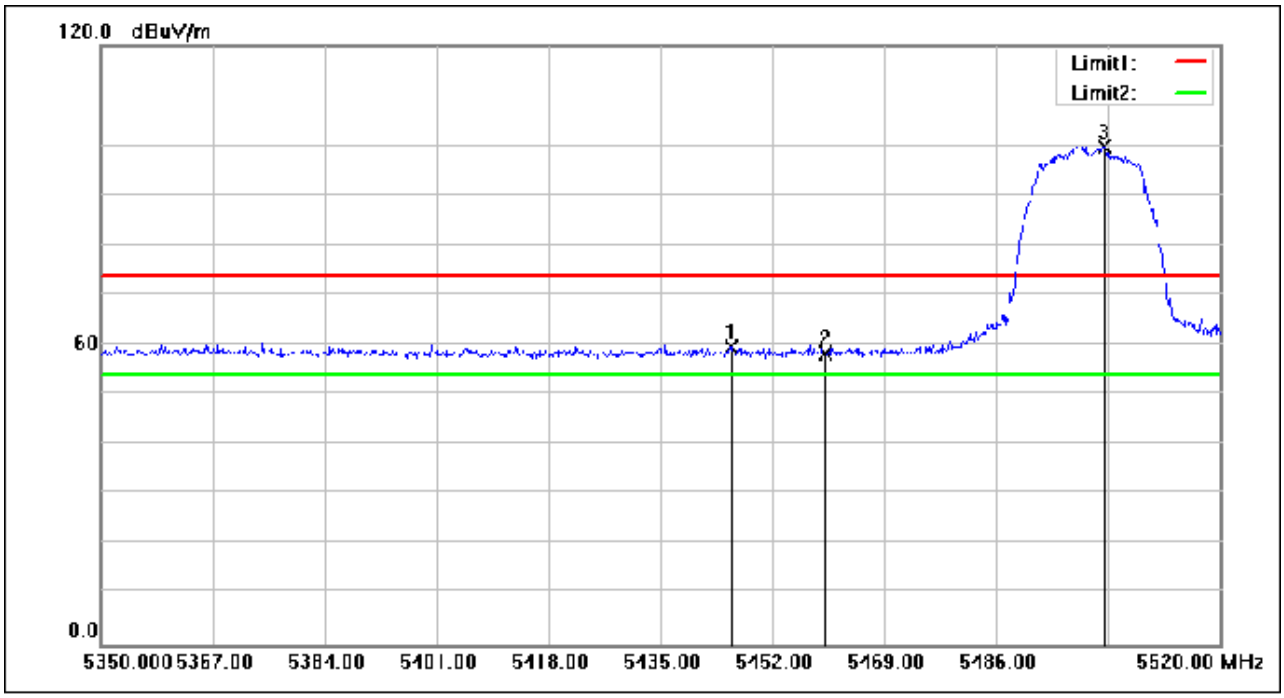


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.710	74.98	-15.32	59.66	74.00	-14.34	peak
2	5460.000	73.72	-15.30	58.42	74.00	-15.58	peak
3	5502.490	115.13	-15.24	99.89	74.00	25.89	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

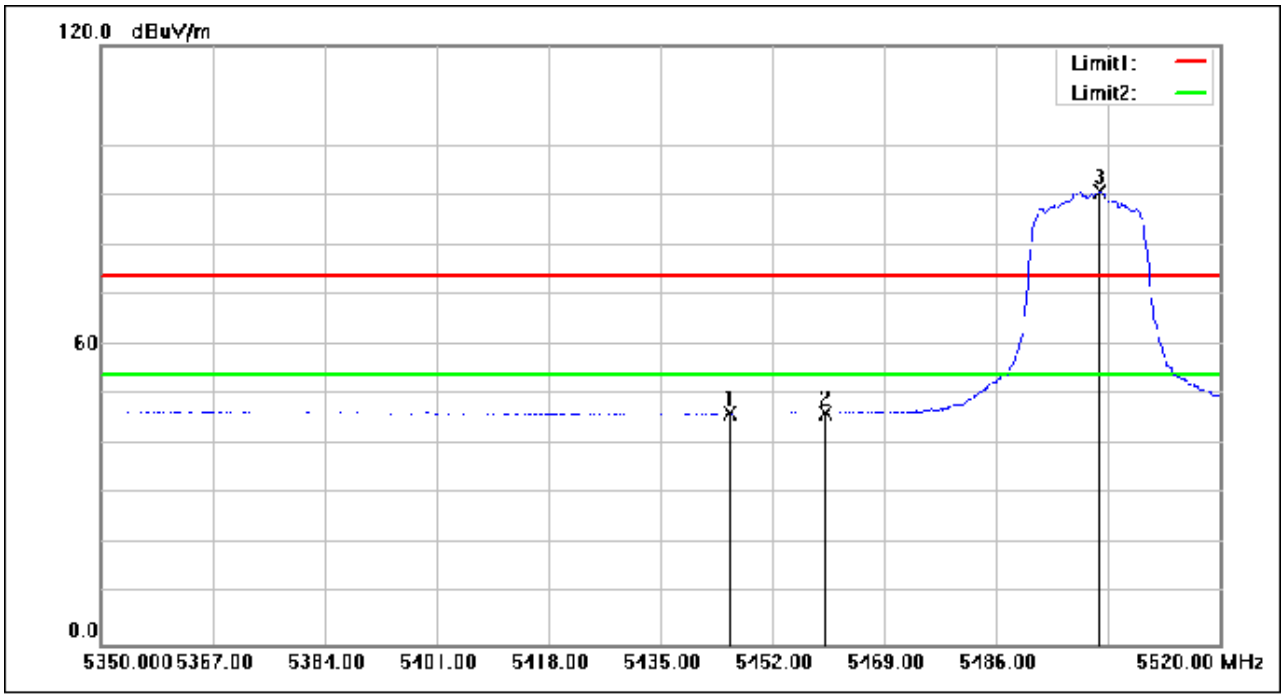


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.540	61.73	-15.32	46.41	54.00	-7.59	AVG
2	5460.000	61.79	-15.30	46.49	54.00	-7.51	AVG
3	5501.640	105.99	-15.25	90.74	54.00	36.74	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

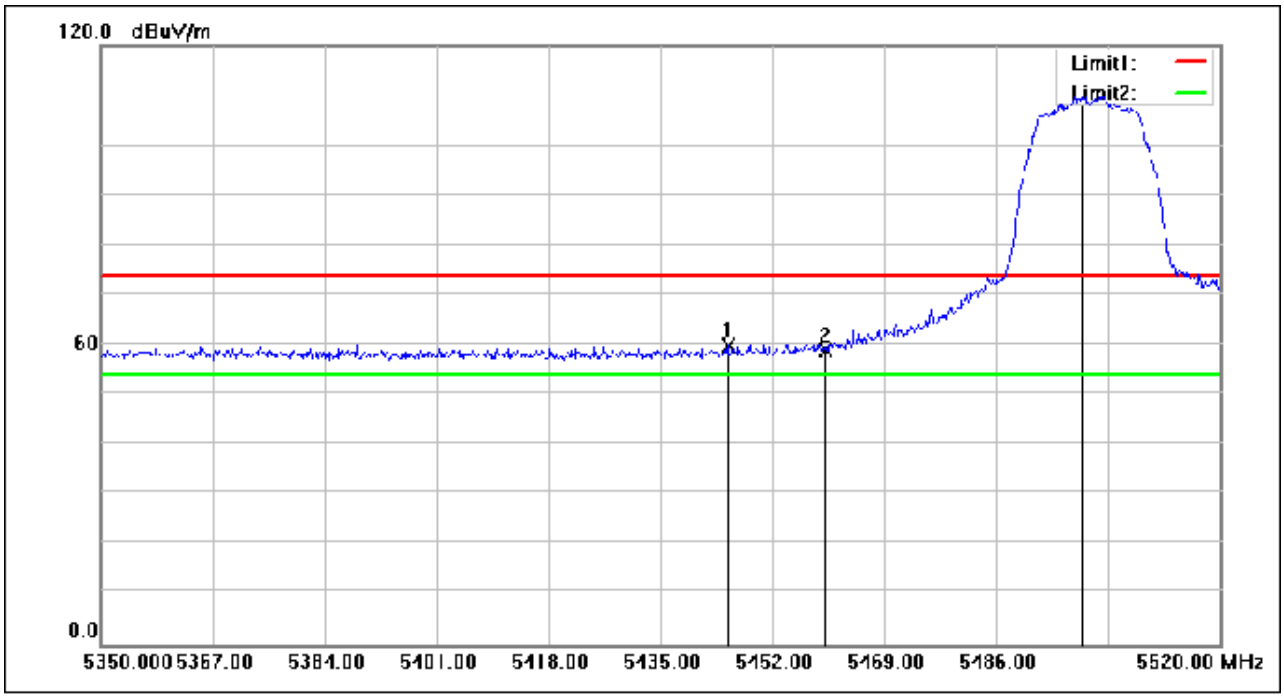


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.200	75.29	-15.32	59.97	74.00	-14.03	peak
2	5460.000	74.35	-15.30	59.05	74.00	-14.95	peak
3	5498.920	125.14	-15.25	109.89	74.00	35.89	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

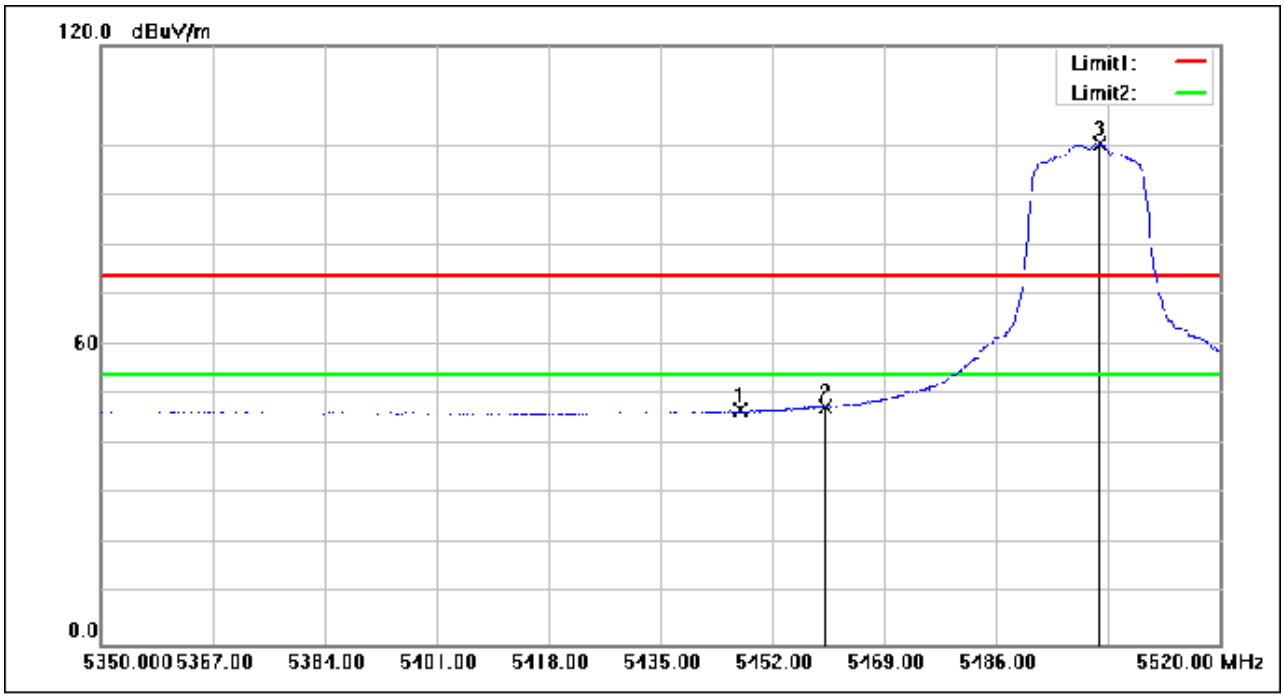


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.070	62.28	-15.32	46.96	54.00	-7.04	AVG
2	5460.000	62.88	-15.30	47.58	54.00	-6.42	AVG
3	5501.810	115.74	-15.25	100.49	54.00	46.49	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

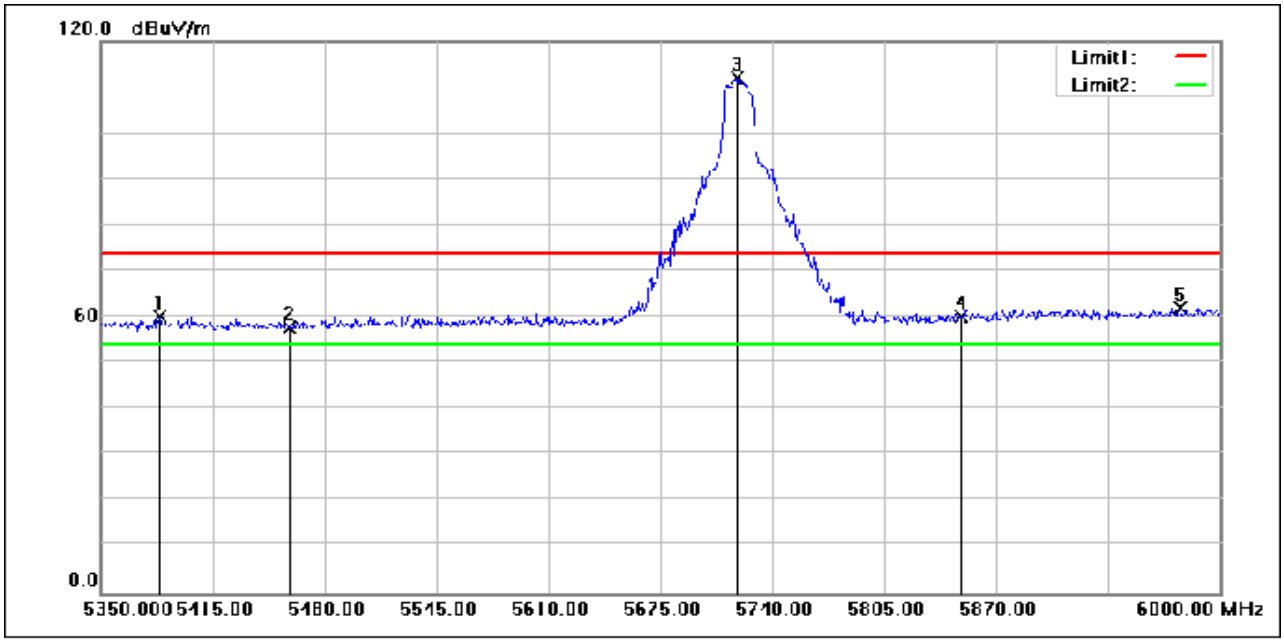


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5384.450	75.52	-15.43	60.09	74.00	-13.91	peak
2	5460.000	73.17	-15.30	57.87	74.00	-16.13	peak
3	5719.200	126.56	-14.61	111.95	74.00	37.95	peak
4	5850.000	74.18	-14.03	60.15	74.00	-13.85	peak
5	5976.600	75.19	-13.23	61.96	74.00	-12.04	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

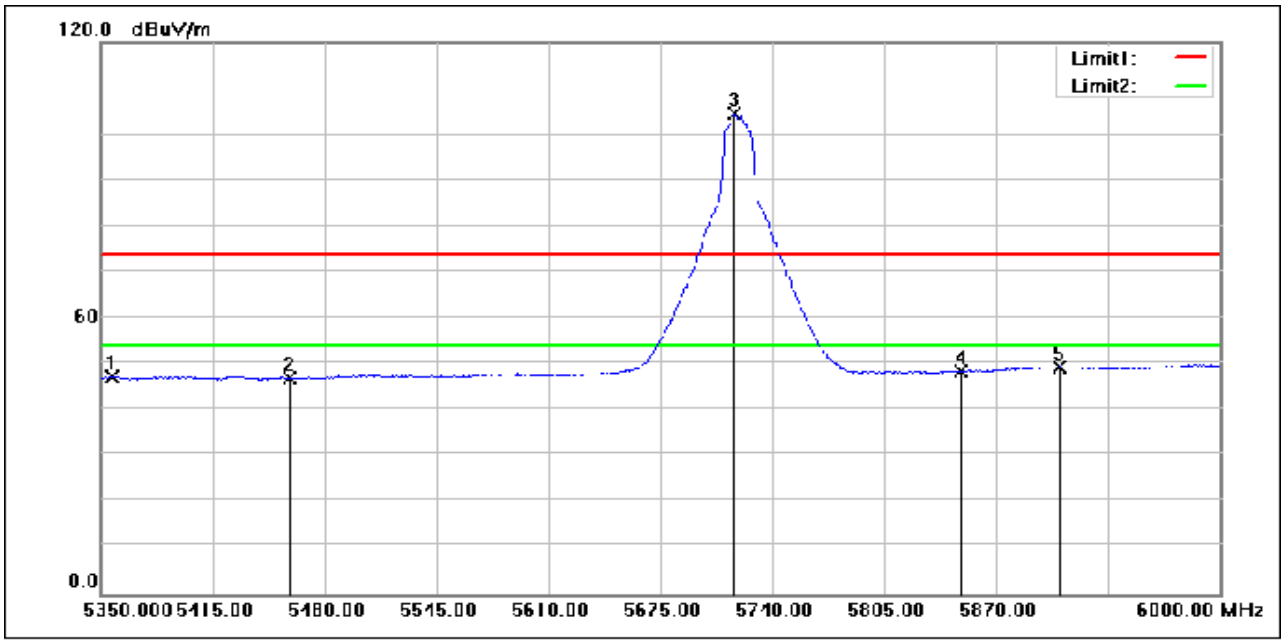


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5356.500	62.87	-15.48	47.39	54.00	-6.61	AVG
2	5460.000	62.26	-15.30	46.96	54.00	-7.04	AVG
3	5717.900	119.02	-14.61	104.41	54.00	50.41	AVG
4	5850.000	62.51	-14.03	48.48	54.00	-5.52	AVG
5	5907.050	63.17	-13.67	49.50	54.00	-4.50	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

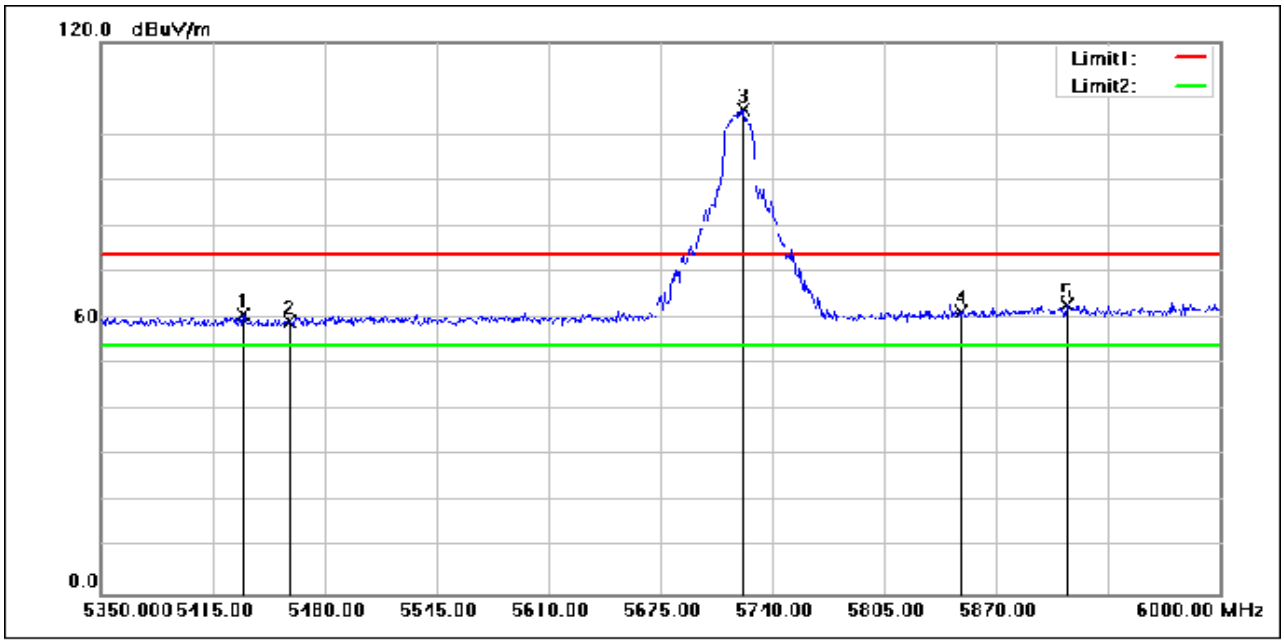


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.550	76.06	-15.34	60.72	74.00	-13.28	peak
2	5460.000	74.43	-15.30	59.13	74.00	-14.87	peak
3	5723.100	119.91	-14.59	105.32	74.00	31.32	peak
4	5850.000	75.39	-14.03	61.36	74.00	-12.64	peak
5	5910.950	76.44	-13.65	62.79	74.00	-11.21	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

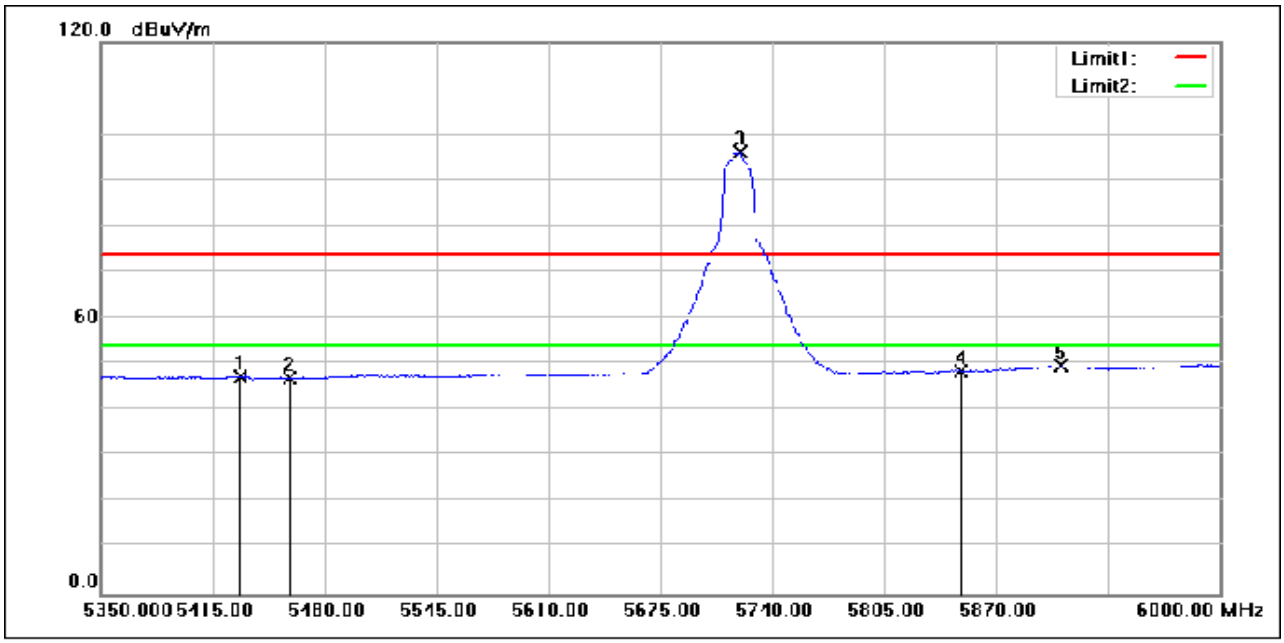


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.250	62.74	-15.34	47.40	54.00	-6.60	AVG
2	5460.000	62.25	-15.30	46.95	54.00	-7.05	AVG
3	5721.150	110.90	-14.60	96.30	54.00	42.30	AVG
4	5850.000	62.56	-14.03	48.53	54.00	-5.47	AVG
5	5907.700	63.30	-13.67	49.63	54.00	-4.37	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

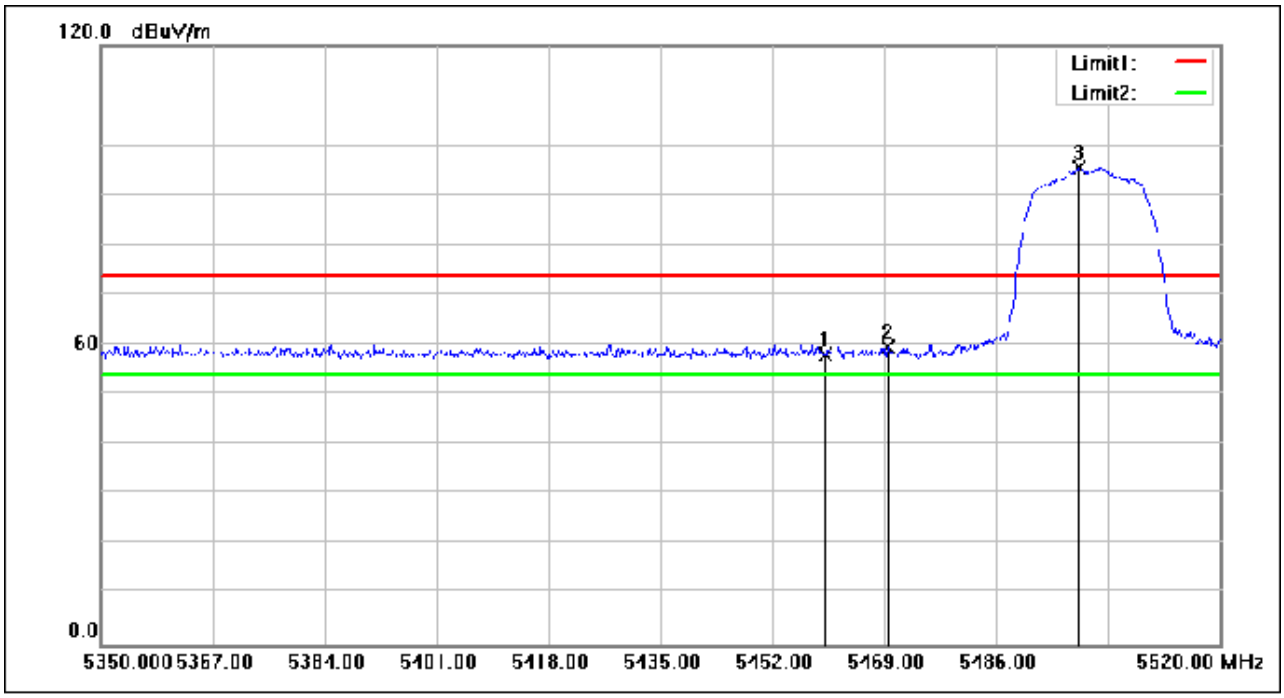


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	73.25	-15.30	57.95	74.00	-16.05	peak
2	5469.510	74.76	-15.28	59.48	74.00	-14.52	peak
3	5498.580	110.66	-15.25	95.41	74.00	21.41	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

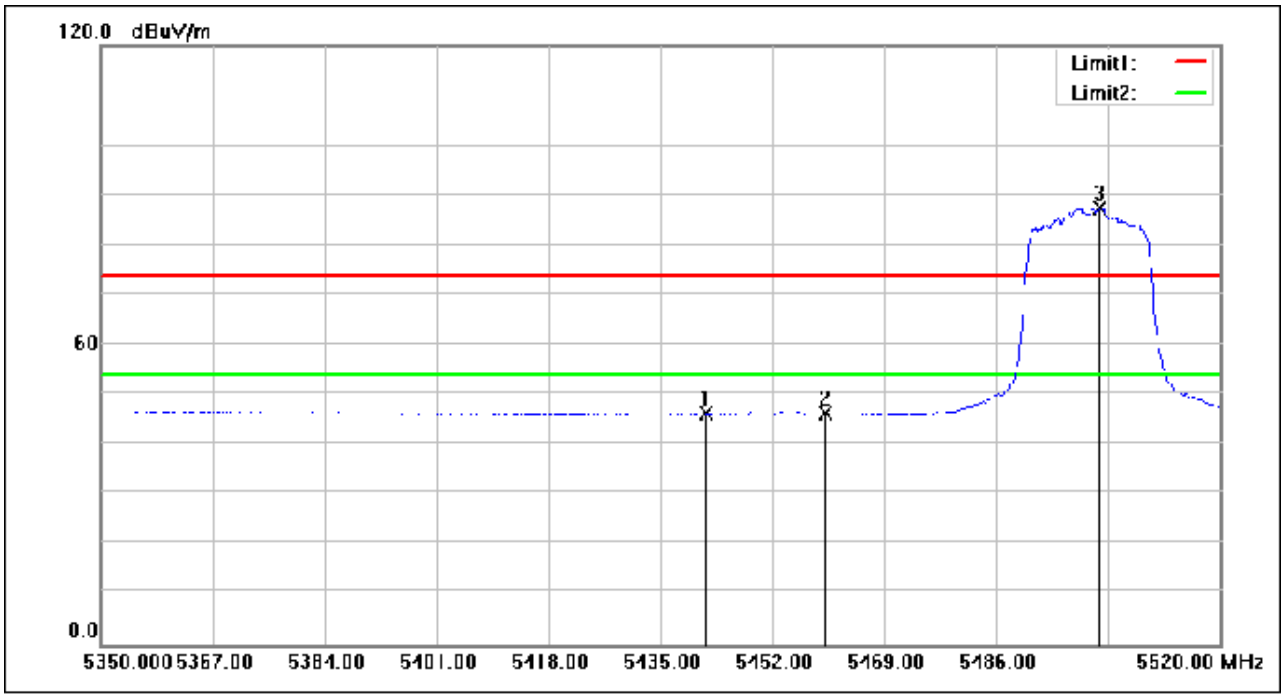


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.970	61.73	-15.32	46.41	54.00	-7.59	AVG
2	5460.000	61.55	-15.30	46.25	54.00	-7.75	AVG
3	5501.810	102.74	-15.25	87.49	54.00	33.49	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

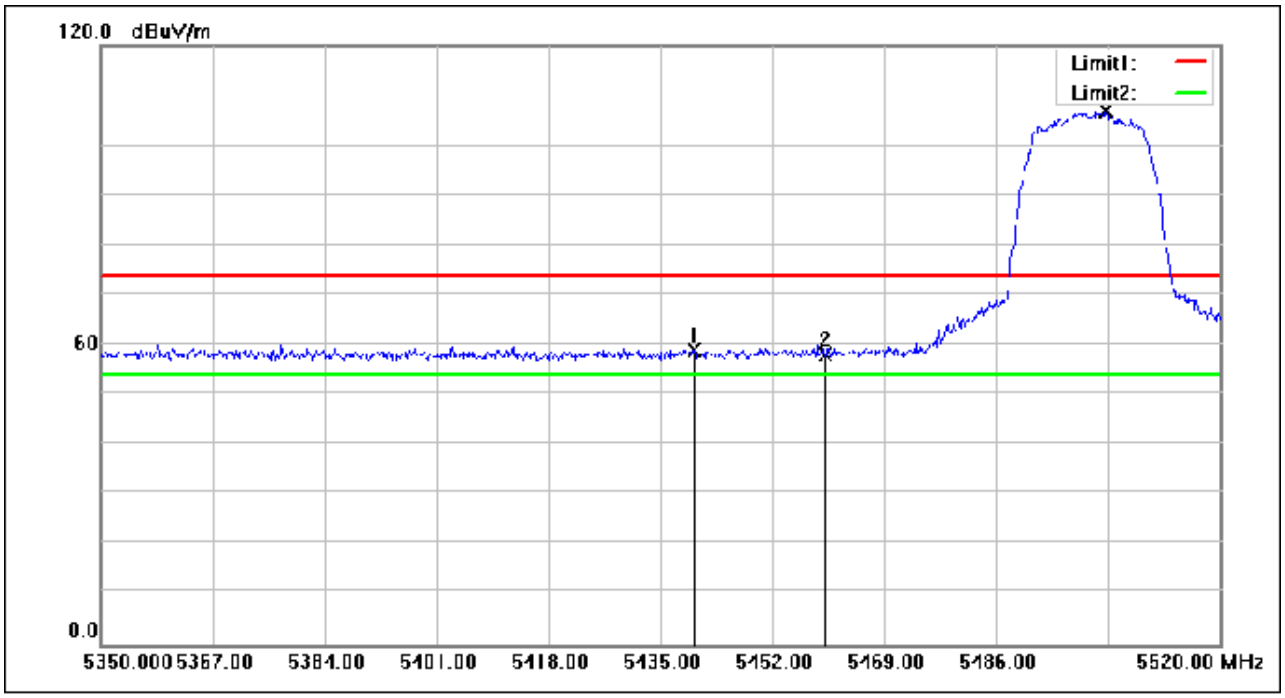


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.100	74.33	-15.33	59.00	74.00	-15.00	peak
2	5460.000	73.46	-15.30	58.16	74.00	-15.84	peak
3	5502.660	122.14	-15.24	106.90	74.00	32.90	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

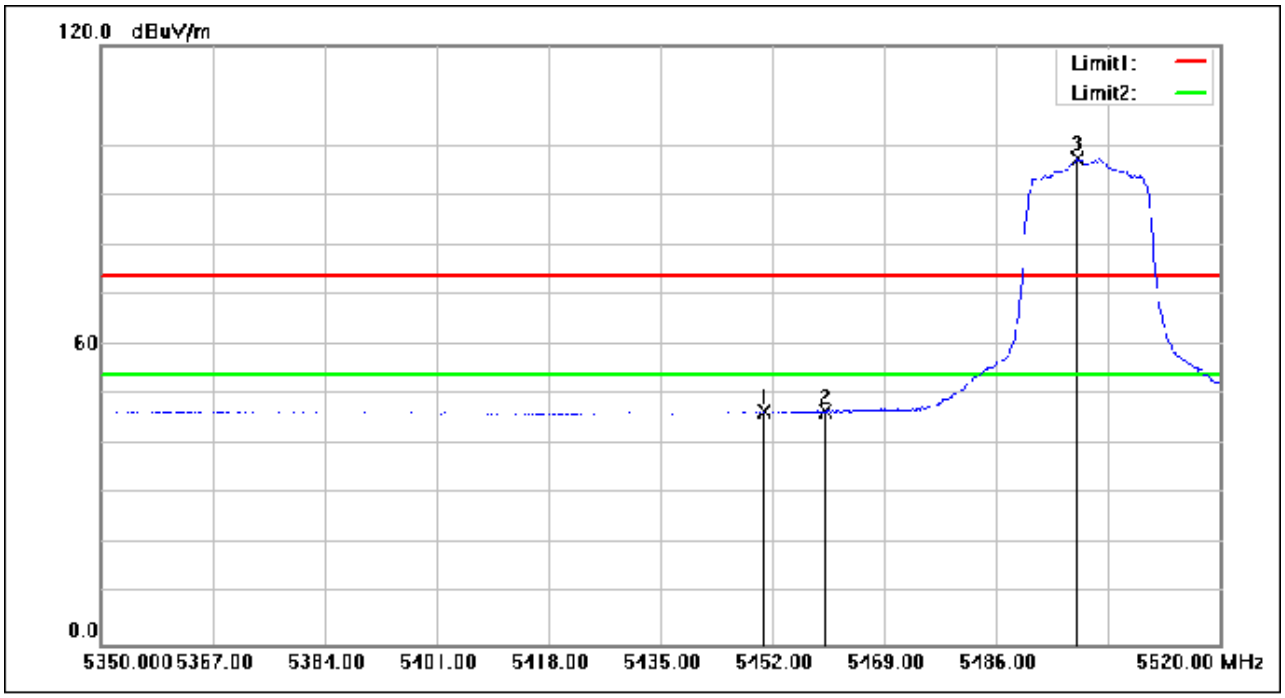


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.810	61.93	-15.31	46.62	54.00	-7.38	AVG
2	5460.000	62.03	-15.30	46.73	54.00	-7.27	AVG
3	5498.410	112.46	-15.25	97.21	54.00	43.21	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

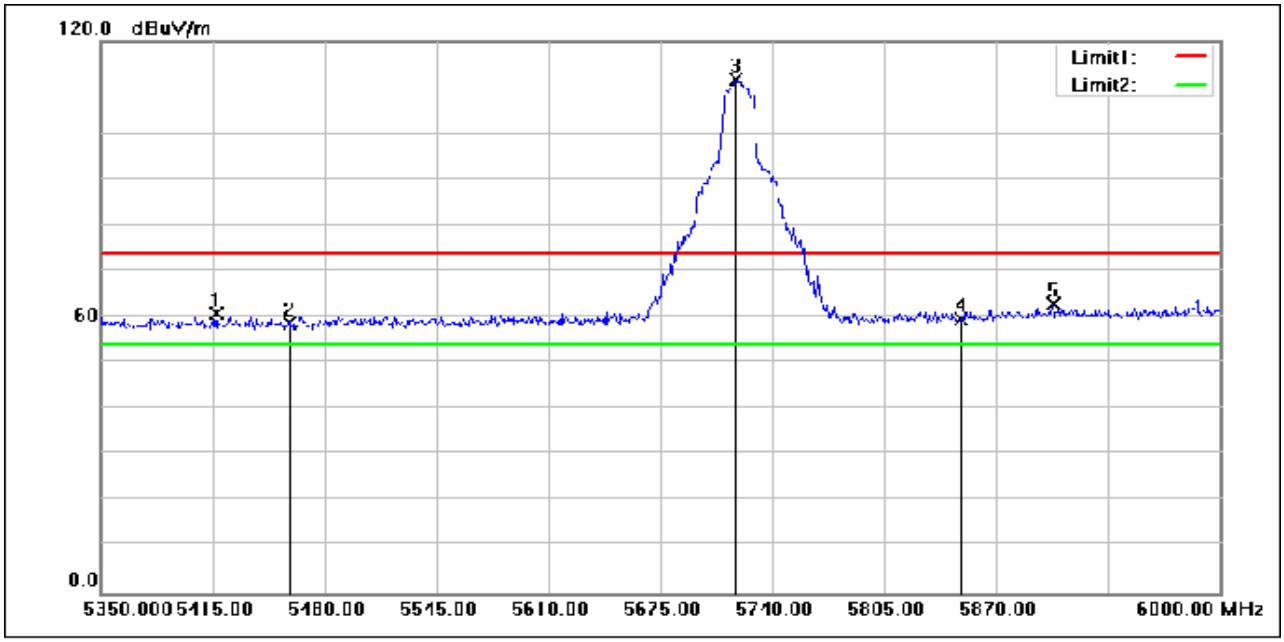


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.950	76.06	-15.37	60.69	74.00	-13.31	peak
2	5460.000	73.89	-15.30	58.59	74.00	-15.41	peak
3	5718.550	126.40	-14.61	111.79	74.00	37.79	peak
4	5850.000	73.53	-14.03	59.50	74.00	-14.50	peak
5	5903.150	76.43	-13.69	62.74	74.00	-11.26	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

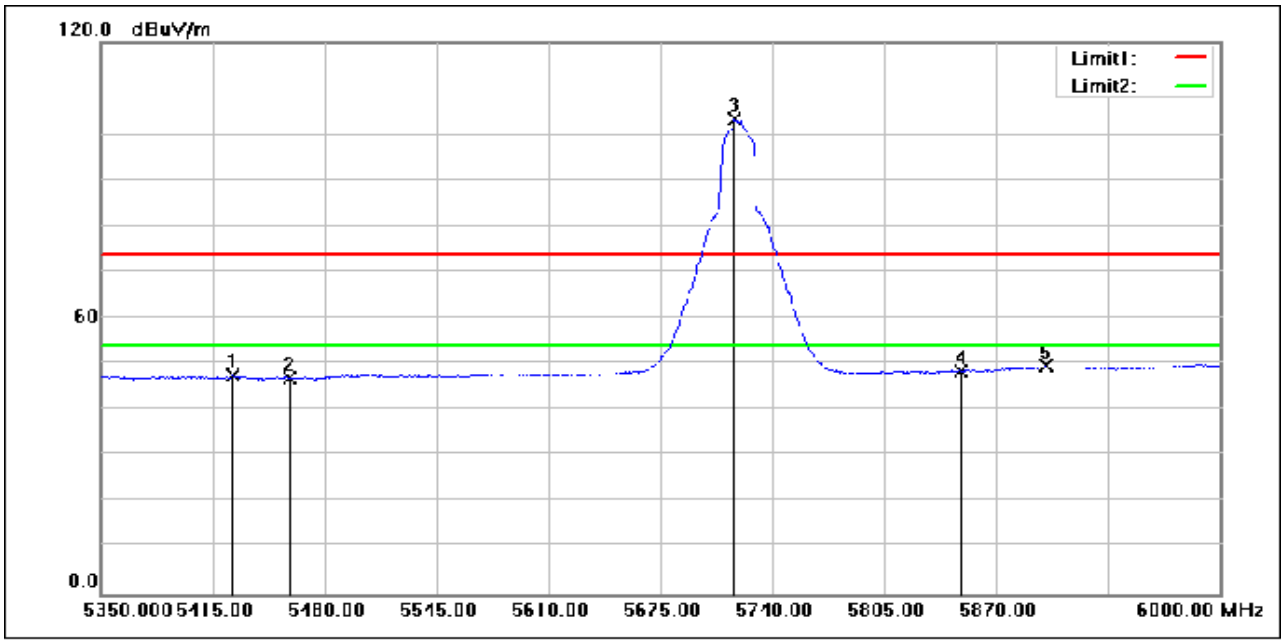


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.700	62.83	-15.36	47.47	54.00	-6.53	AVG
2	5460.000	62.17	-15.30	46.87	54.00	-7.13	AVG
3	5717.900	117.83	-14.61	103.22	54.00	49.22	AVG
4	5850.000	62.56	-14.03	48.53	54.00	-5.47	AVG
5	5898.600	63.29	-13.72	49.57	54.00	-4.43	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

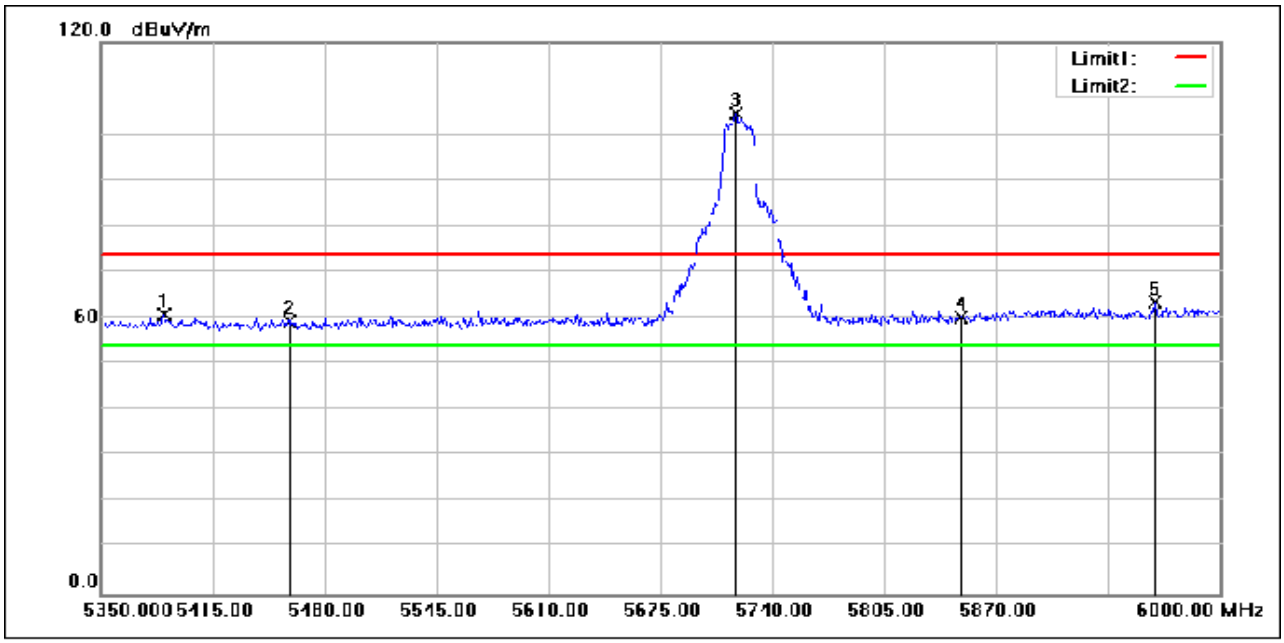


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5386.400	76.22	-15.43	60.79	74.00	-13.21	peak
2	5460.000	74.58	-15.30	59.28	74.00	-14.72	peak
3	5718.550	119.08	-14.61	104.47	74.00	30.47	peak
4	5850.000	74.16	-14.03	60.13	74.00	-13.87	peak
5	5962.300	76.71	-13.32	63.39	74.00	-10.61	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

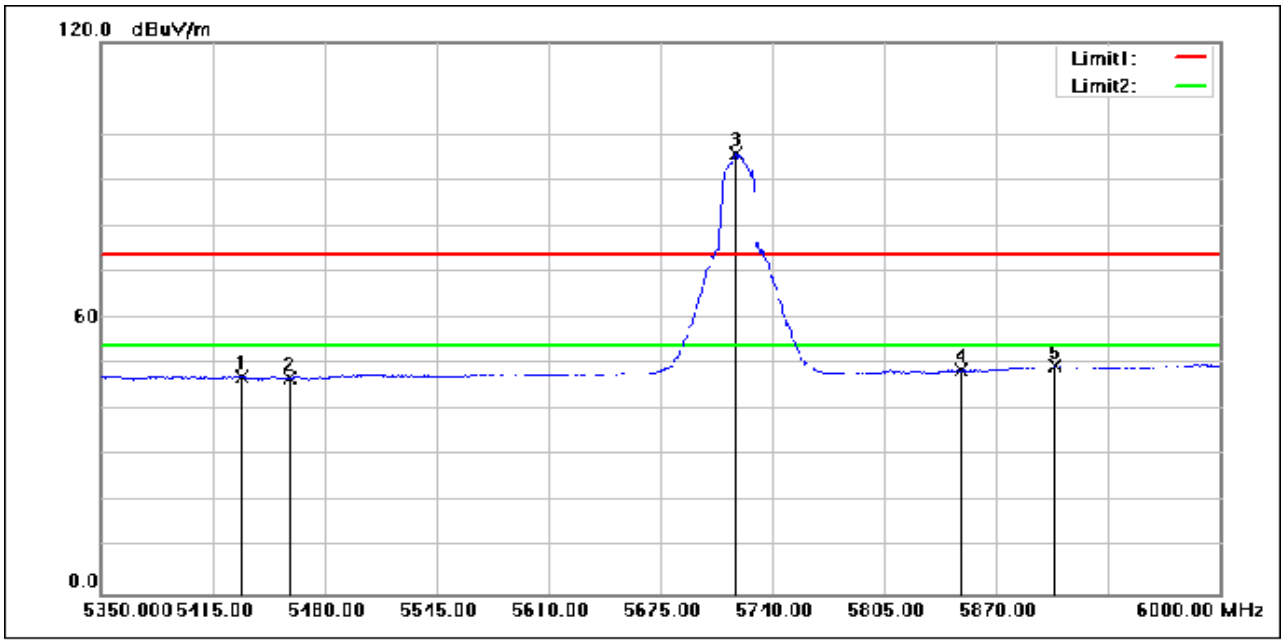


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.900	62.73	-15.34	47.39	54.00	-6.61	AVG
2	5460.000	62.27	-15.30	46.97	54.00	-7.03	AVG
3	5718.550	110.41	-14.61	95.80	54.00	41.80	AVG
4	5850.000	62.73	-14.03	48.70	54.00	-5.30	AVG
5	5903.800	63.35	-13.69	49.66	54.00	-4.34	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

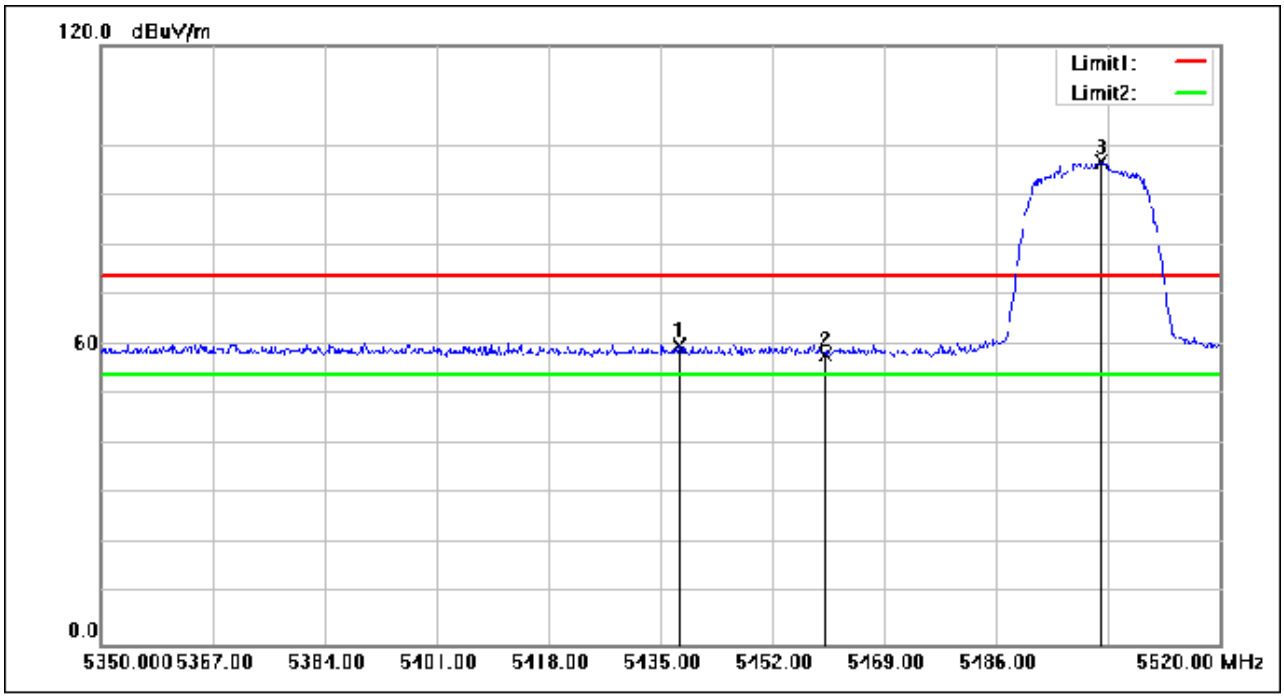


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5437.890	75.20	-15.34	59.86	74.00	-14.14	peak
2	5460.000	73.33	-15.30	58.03	74.00	-15.97	peak
3	5501.980	111.95	-15.25	96.70	74.00	22.70	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

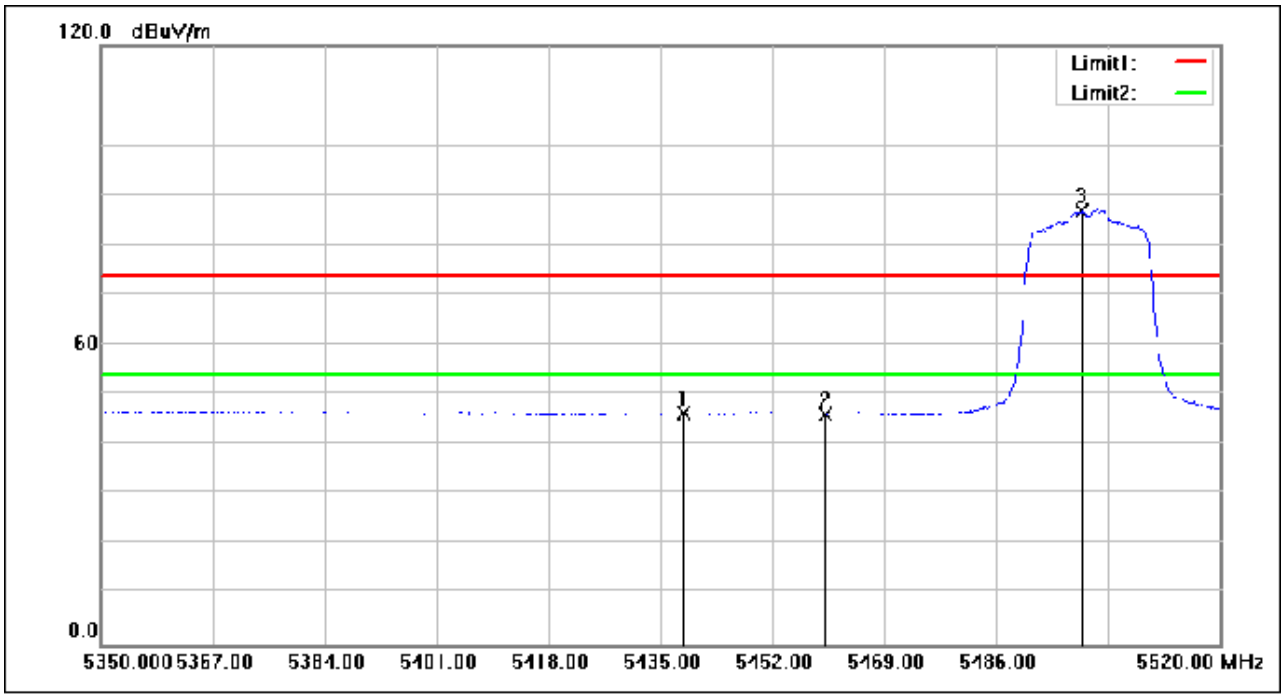


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5438.570	61.75	-15.34	46.41	54.00	-7.59	AVG
2	5460.000	61.49	-15.30	46.19	54.00	-7.81	AVG
3	5499.090	102.05	-15.25	86.80	54.00	32.80	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

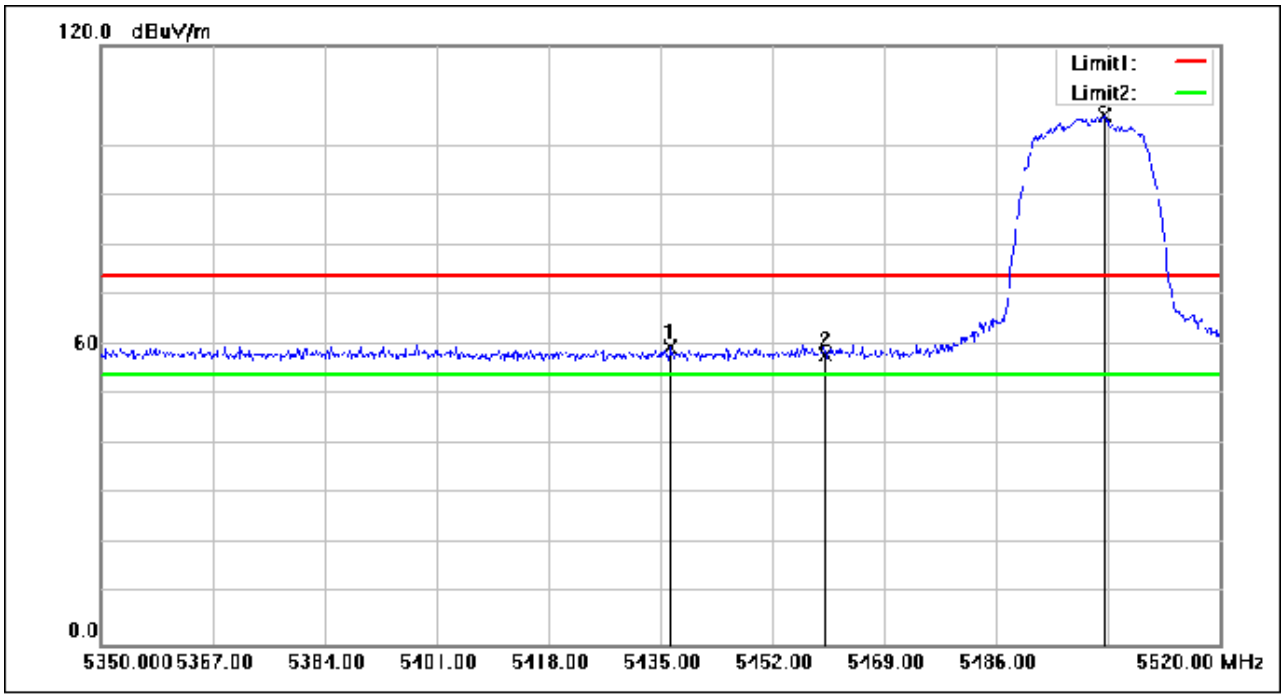


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5436.530	74.85	-15.34	59.51	74.00	-14.49	peak
2	5460.000	73.24	-15.30	57.94	74.00	-16.06	peak
3	5502.320	121.22	-15.24	105.98	74.00	31.98	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

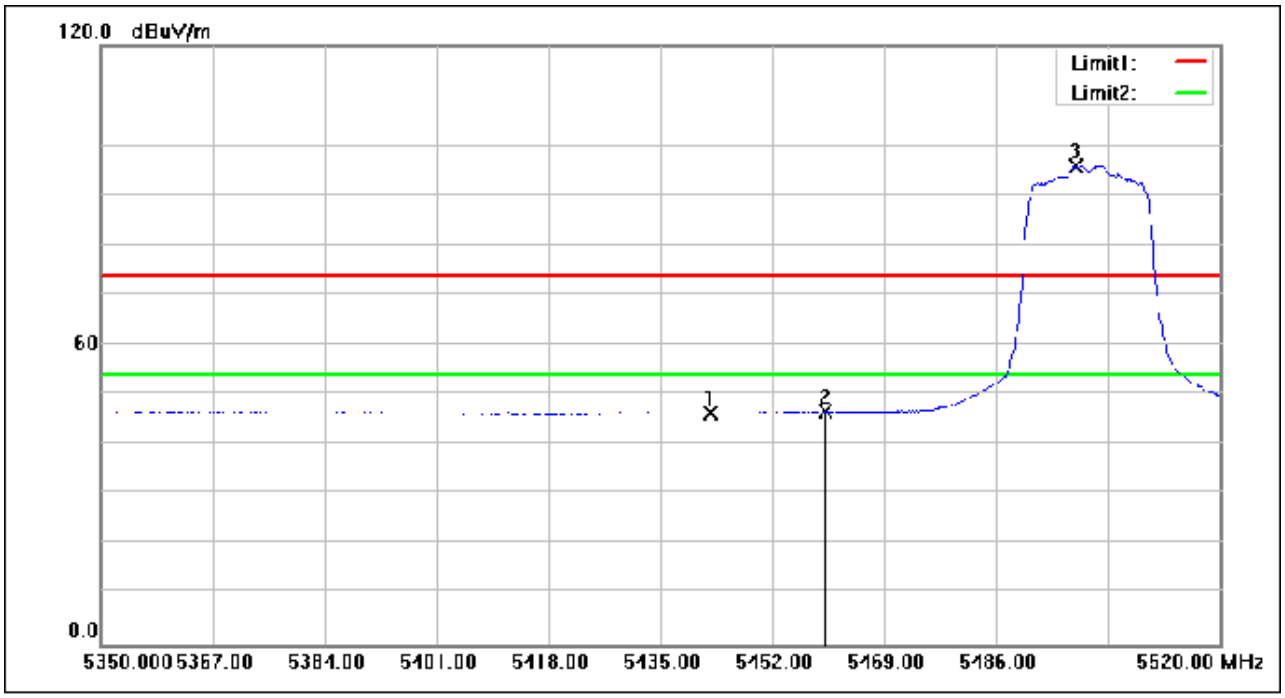


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5442.650	61.80	-15.32	46.48	54.00	-7.52	AVG
2	5460.000	61.81	-15.30	46.51	54.00	-7.49	AVG
3	5498.070	111.17	-15.25	95.92	54.00	41.92	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

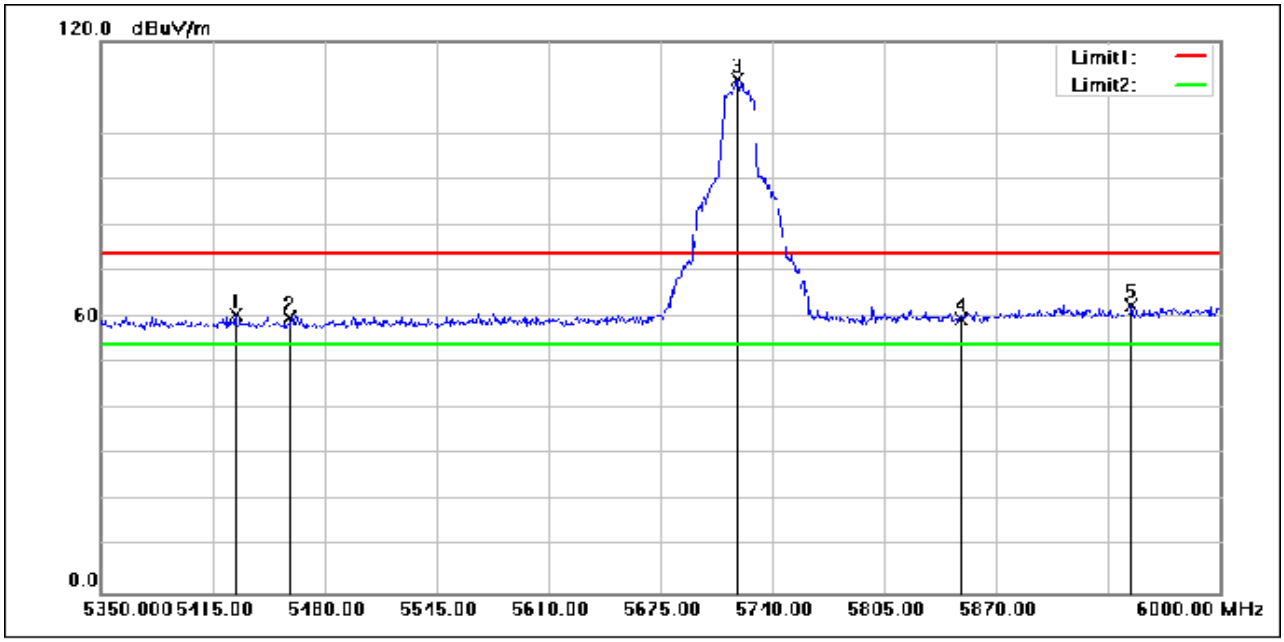


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5428.000	75.73	-15.36	60.37	74.00	-13.63	peak
2	5460.000	75.14	-15.30	59.84	74.00	-14.16	peak
3	5719.200	126.31	-14.61	111.70	74.00	37.70	peak
4	5850.000	73.59	-14.03	59.56	74.00	-14.44	peak
5	5948.650	75.99	-13.41	62.58	74.00	-11.42	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

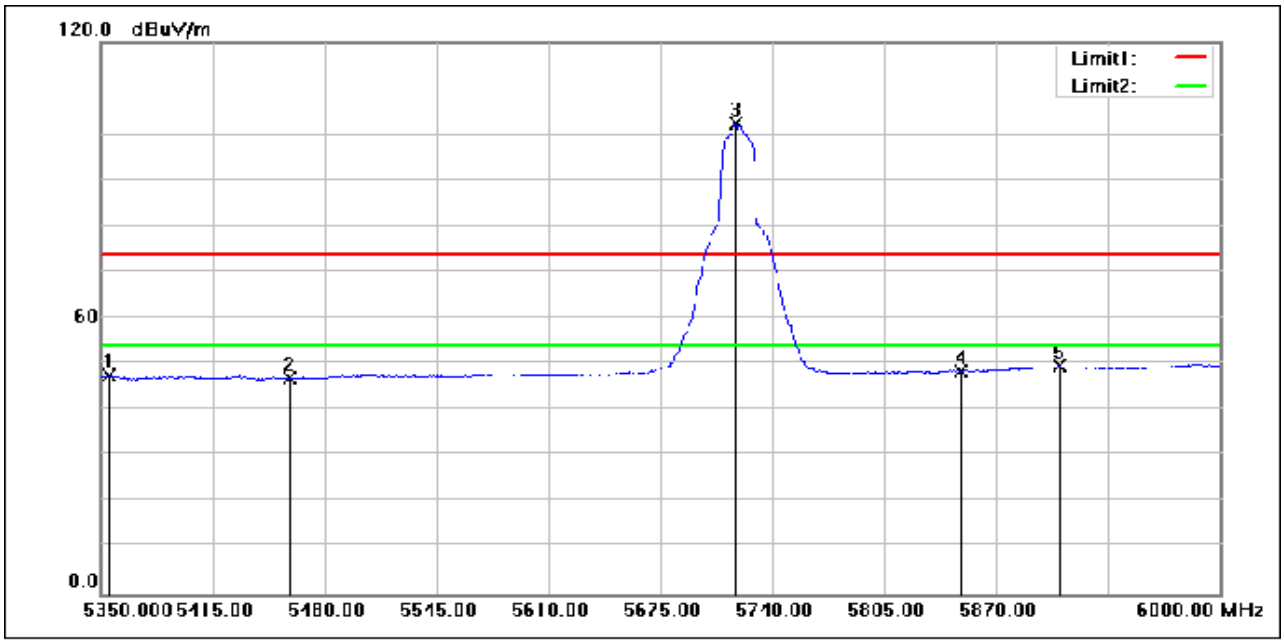


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5354.550	63.08	-15.49	47.59	54.00	-6.41	AVG
2	5460.000	62.16	-15.30	46.86	54.00	-7.14	AVG
3	5718.550	116.93	-14.61	102.32	54.00	48.32	AVG
4	5850.000	62.54	-14.03	48.51	54.00	-5.49	AVG
5	5906.400	63.24	-13.67	49.57	54.00	-4.43	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

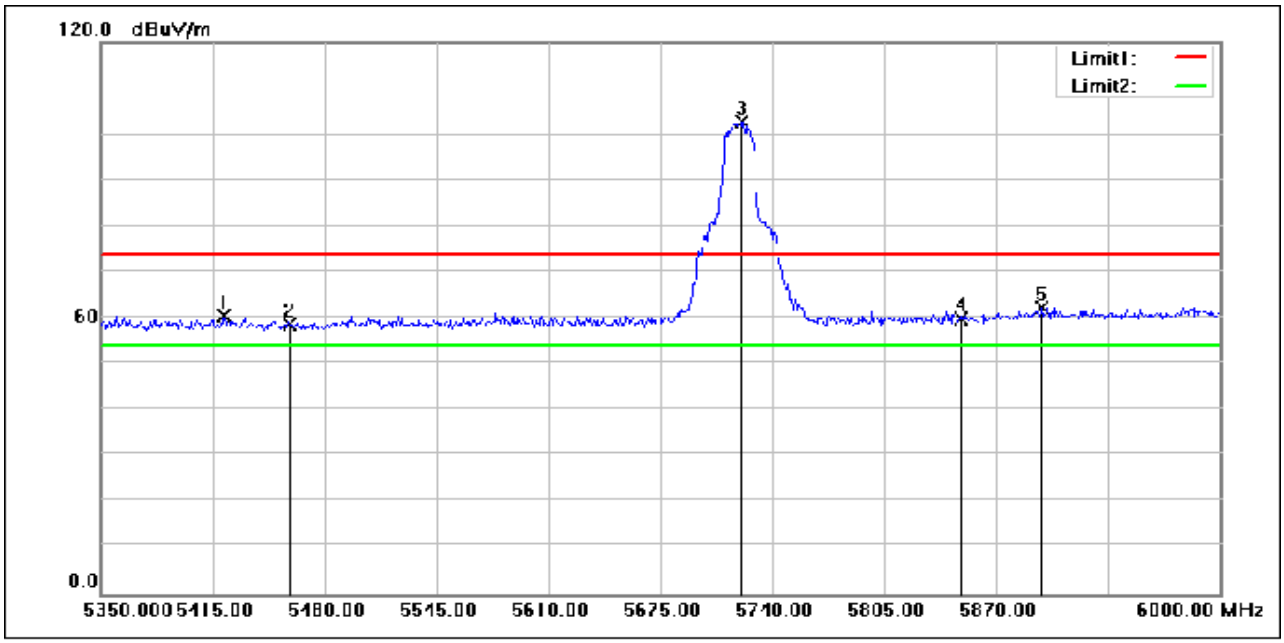


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5421.500	75.82	-15.36	60.46	74.00	-13.54	peak
2	5460.000	73.85	-15.30	58.55	74.00	-15.45	peak
3	5722.450	117.36	-14.59	102.77	74.00	28.77	peak
4	5850.000	73.80	-14.03	59.77	74.00	-14.23	peak
5	5896.650	76.05	-13.74	62.31	74.00	-11.69	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

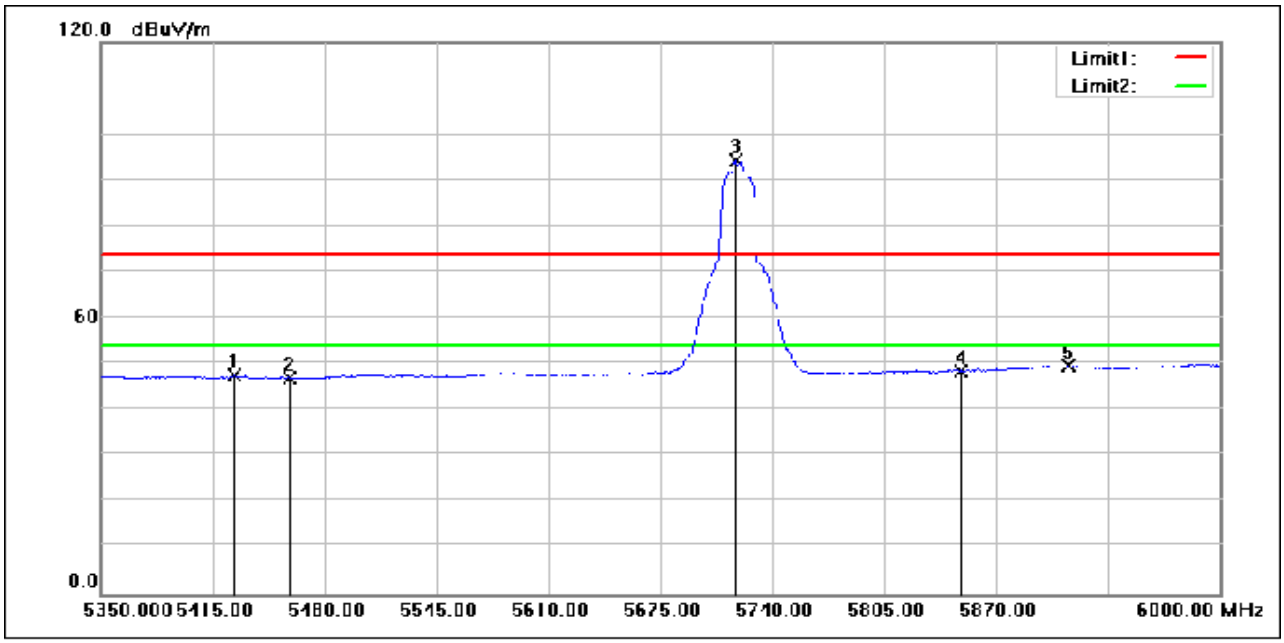


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5427.350	62.91	-15.36	47.55	54.00	-6.45	AVG
2	5460.000	62.28	-15.30	46.98	54.00	-7.02	AVG
3	5718.550	108.92	-14.61	94.31	54.00	40.31	AVG
4	5850.000	62.62	-14.03	48.59	54.00	-5.41	AVG
5	5912.250	63.19	-13.63	49.56	54.00	-4.44	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

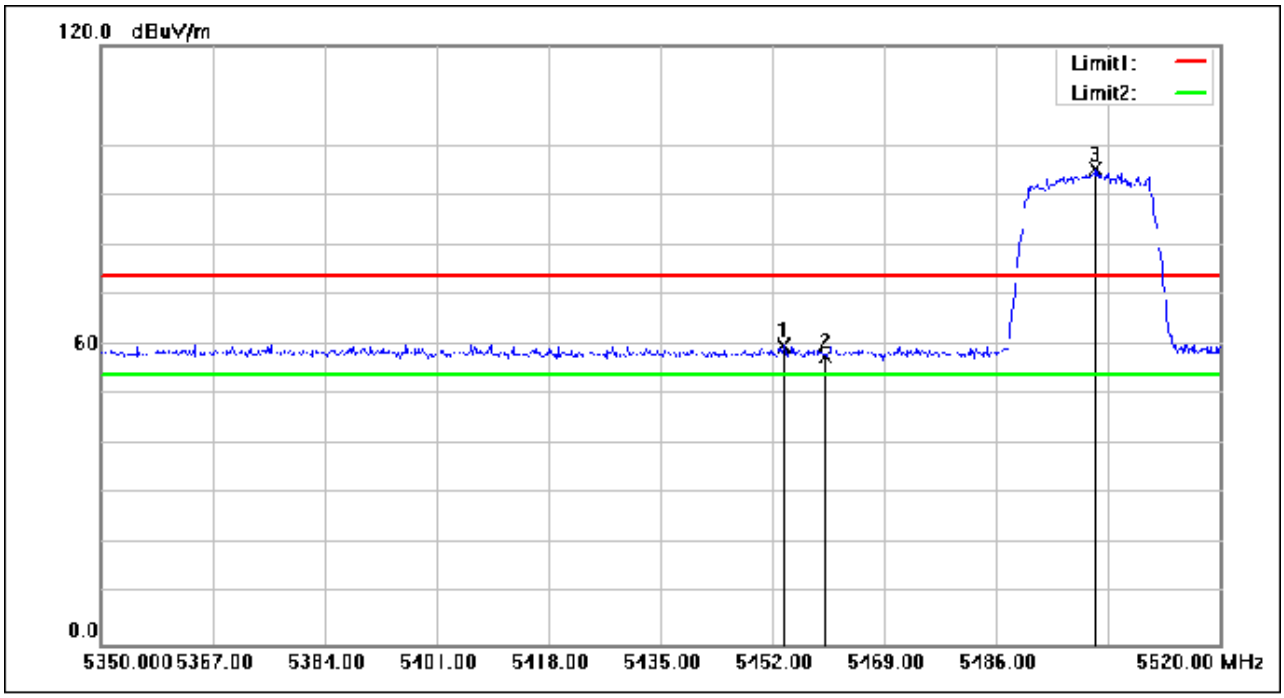


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.700	75.00	-15.30	59.70	74.00	-14.30	peak
2	5460.000	73.09	-15.30	57.79	74.00	-16.21	peak
3	5501.130	110.41	-15.25	95.16	74.00	21.16	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

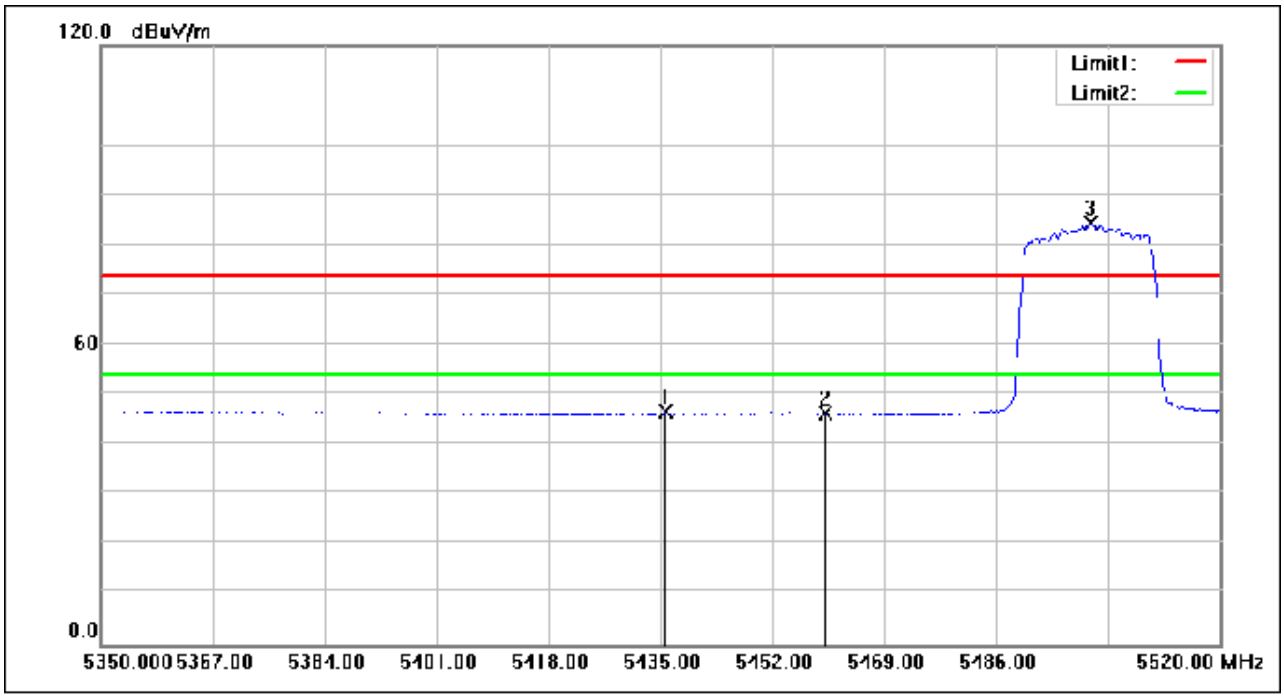


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5435.850	61.89	-15.34	46.55	54.00	-7.45	AVG
2	5460.000	61.57	-15.30	46.27	54.00	-7.73	AVG
3	5500.280	99.82	-15.25	84.57	54.00	30.57	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

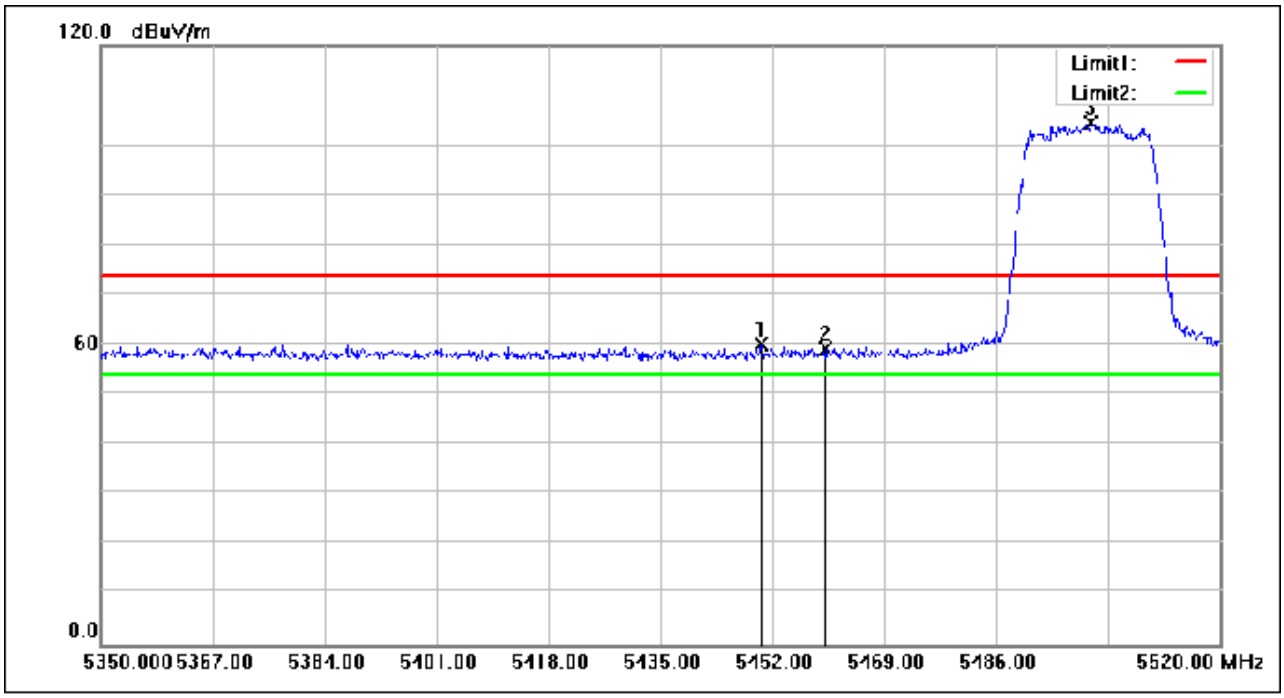


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.300	75.34	-15.32	60.02	74.00	-13.98	peak
2	5460.000	74.47	-15.30	59.17	74.00	-14.83	peak
3	5500.450	119.89	-15.25	104.64	74.00	30.64	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

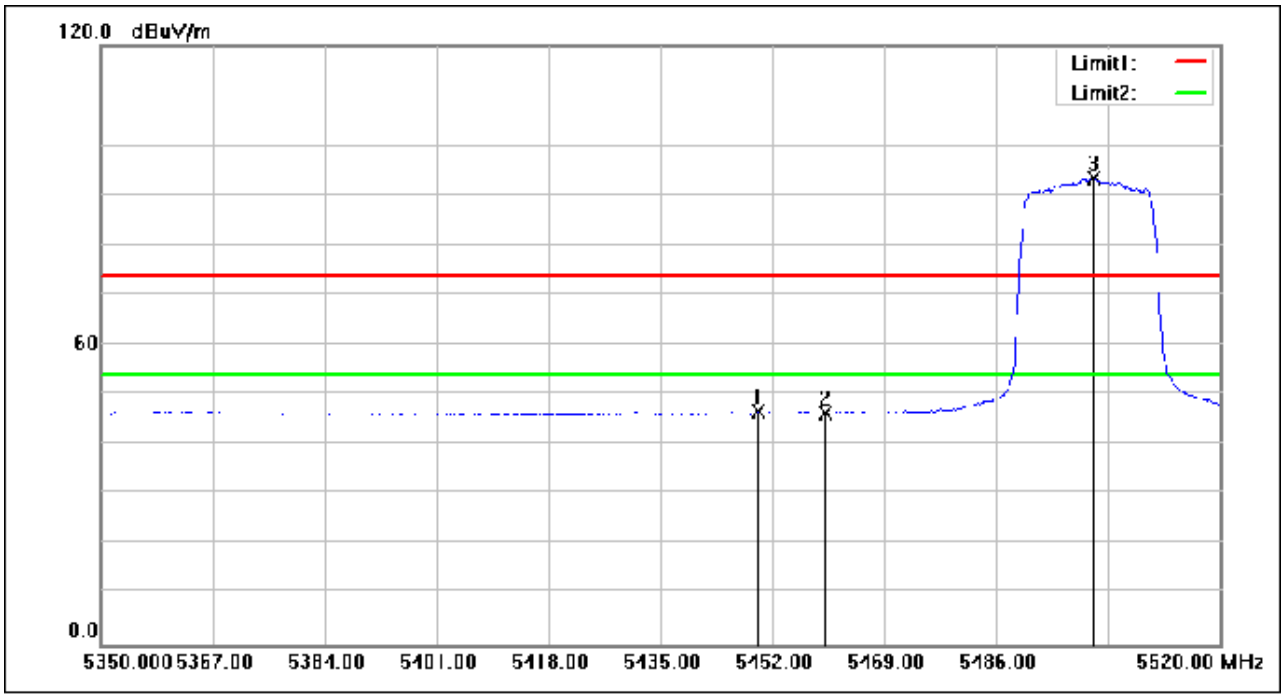


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.790	61.89	-15.32	46.57	54.00	-7.43	AVG
2	5460.000	61.78	-15.30	46.48	54.00	-7.52	AVG
3	5500.790	108.82	-15.25	93.57	54.00	39.57	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

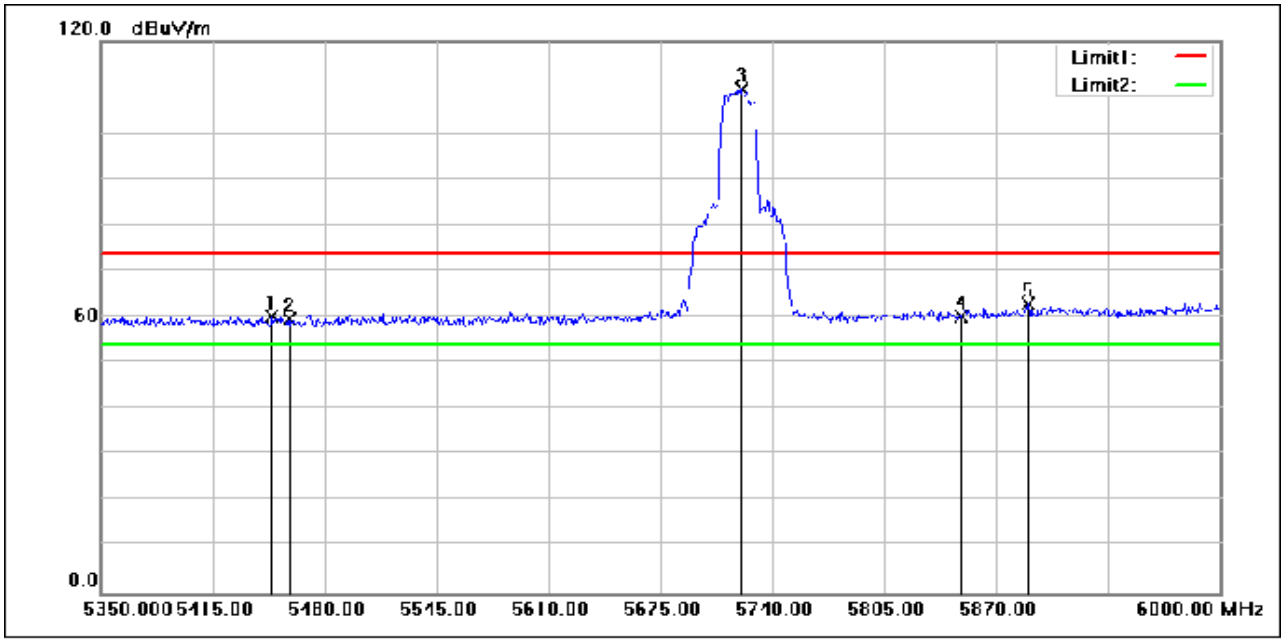


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.450	75.49	-15.32	60.17	74.00	-13.83	peak
2	5460.000	74.75	-15.30	59.45	74.00	-14.55	peak
3	5721.800	124.16	-14.60	109.56	74.00	35.56	peak
4	5850.000	74.27	-14.03	60.24	74.00	-13.76	peak
5	5888.200	76.65	-13.79	62.86	74.00	-11.14	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

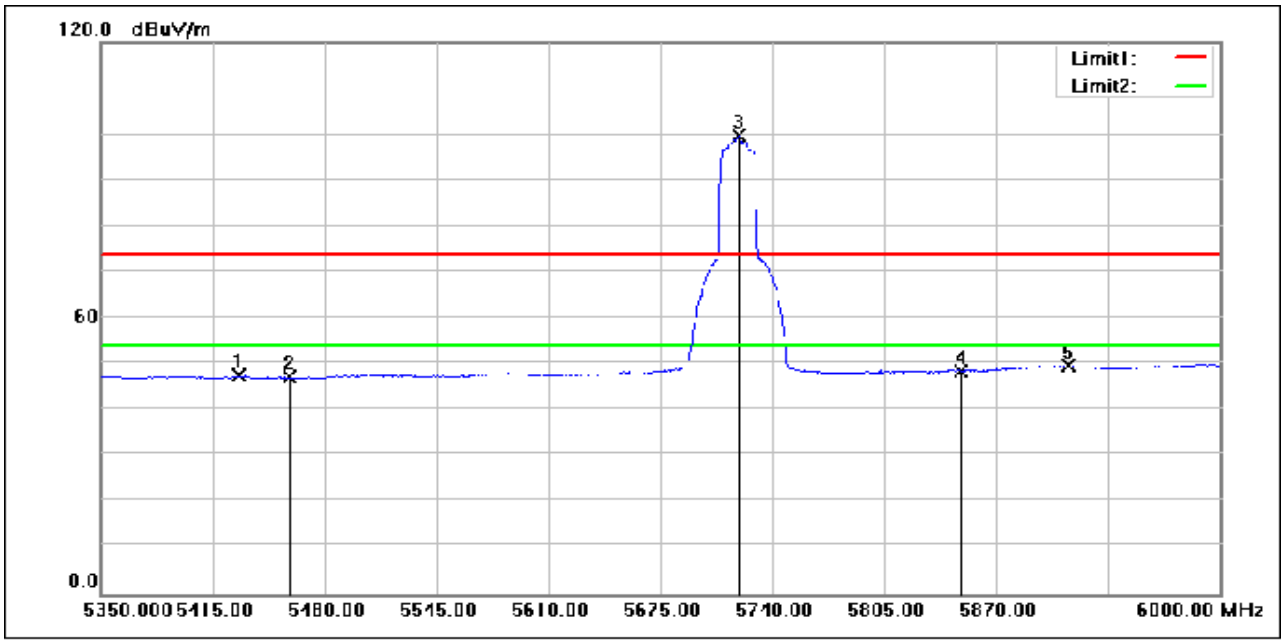


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.950	62.77	-15.35	47.42	54.00	-6.58	AVG
2	5460.000	62.41	-15.30	47.11	54.00	-6.89	AVG
3	5720.500	114.23	-14.60	99.63	54.00	45.63	AVG
4	5850.000	62.61	-14.03	48.58	54.00	-5.42	AVG
5	5911.600	63.33	-13.64	49.69	54.00	-4.31	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

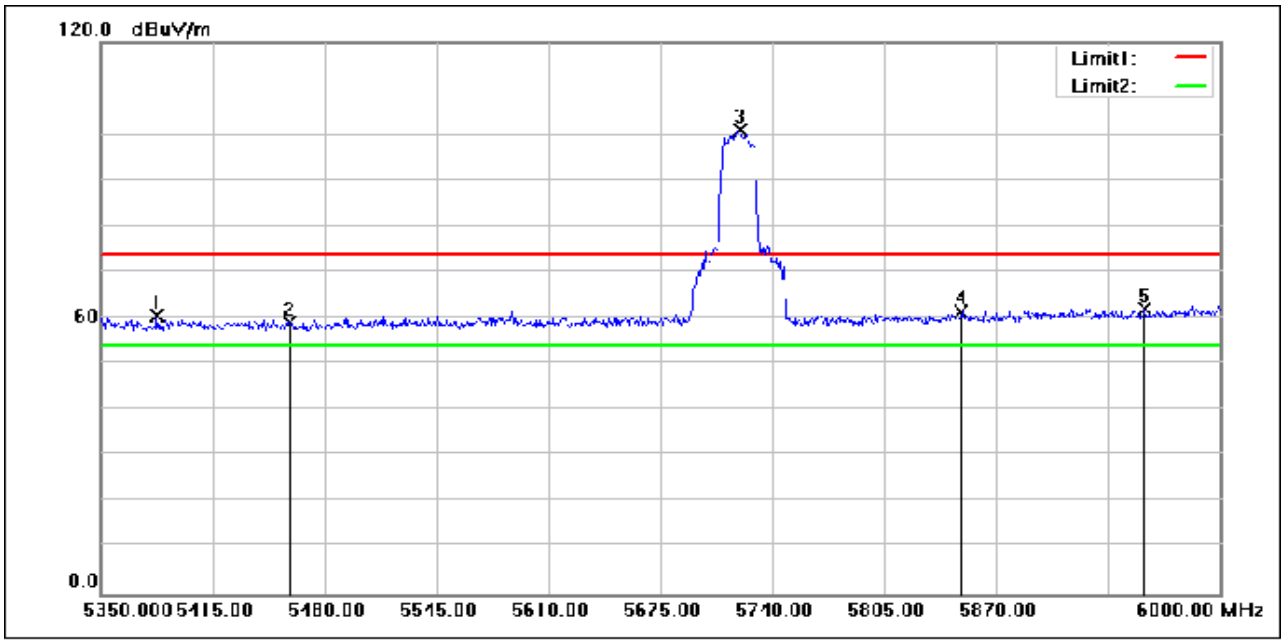


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5382.500	75.74	-15.43	60.31	74.00	-13.69	peak
2	5460.000	74.13	-15.30	58.83	74.00	-15.17	peak
3	5721.150	115.66	-14.60	101.06	74.00	27.06	peak
4	5850.000	75.27	-14.03	61.24	74.00	-12.76	peak
5	5955.800	75.34	-13.36	61.98	74.00	-12.02	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

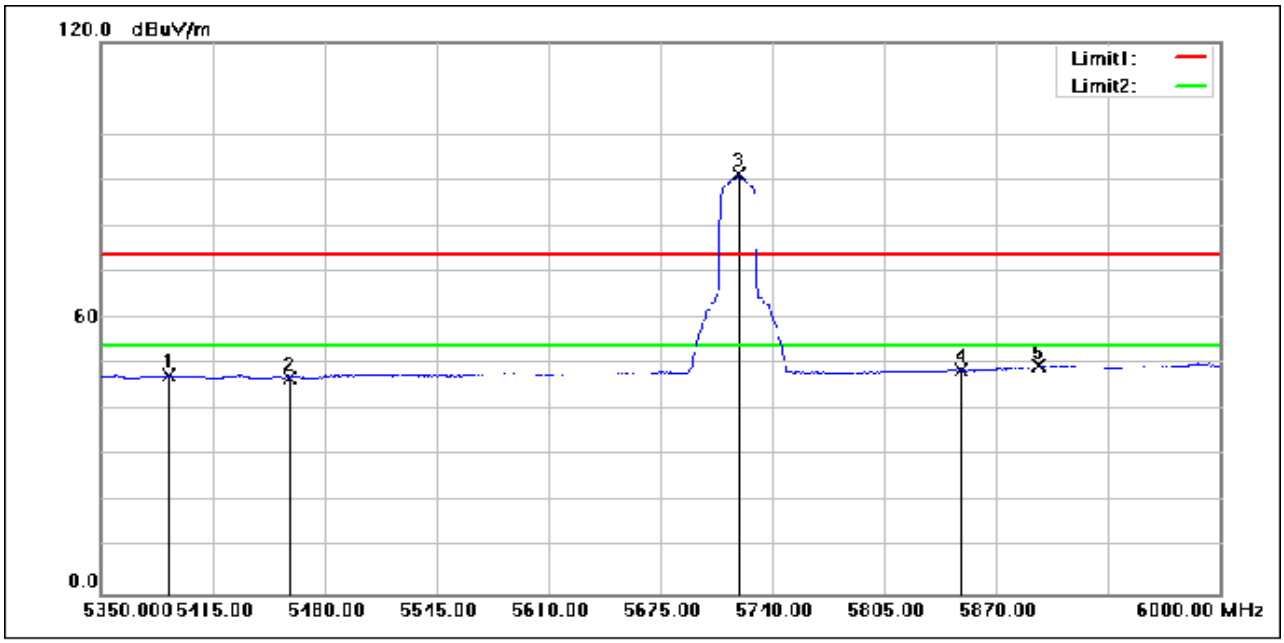


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5389.650	62.90	-15.42	47.48	54.00	-6.52	AVG
2	5460.000	62.40	-15.30	47.10	54.00	-6.90	AVG
3	5720.500	106.08	-14.60	91.48	54.00	37.48	AVG
4	5850.000	62.70	-14.03	48.67	54.00	-5.33	AVG
5	5894.700	63.45	-13.74	49.71	54.00	-4.29	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

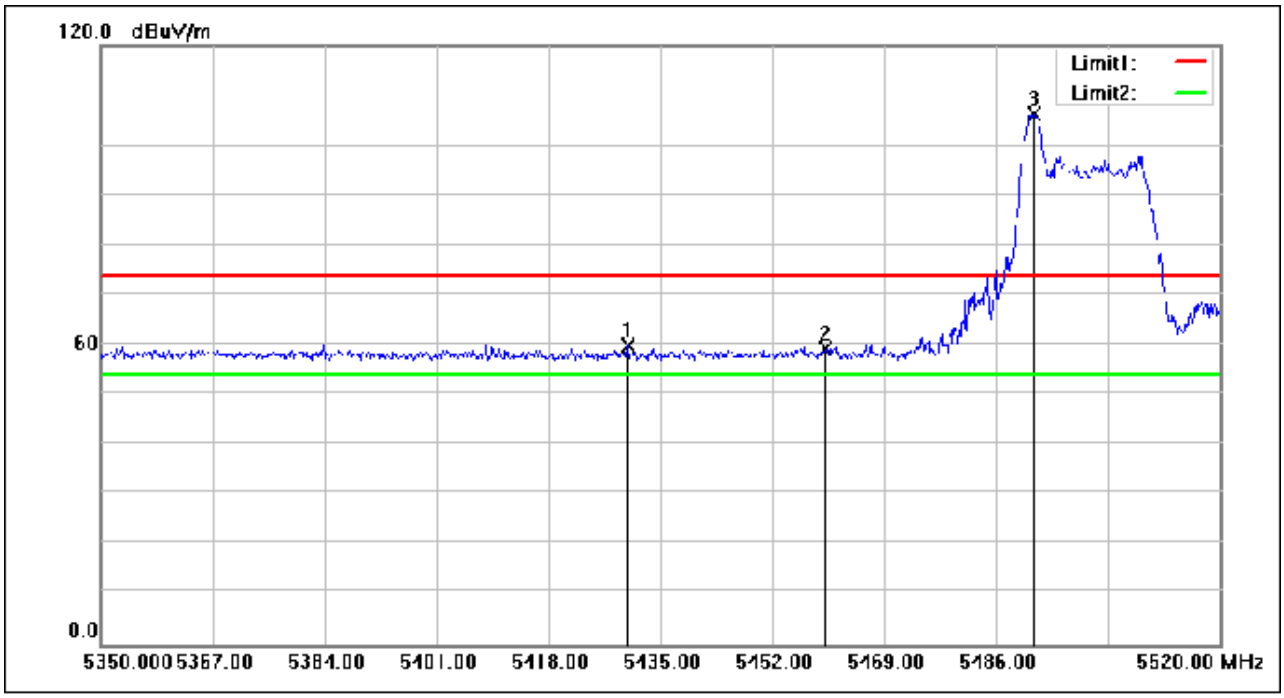

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.070	75.16	-15.35	59.81	74.00	-14.19	peak
2	5460.000	74.55	-15.30	59.25	74.00	-14.75	peak
3	5491.780	121.49	-15.26	106.23	74.00	32.23	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

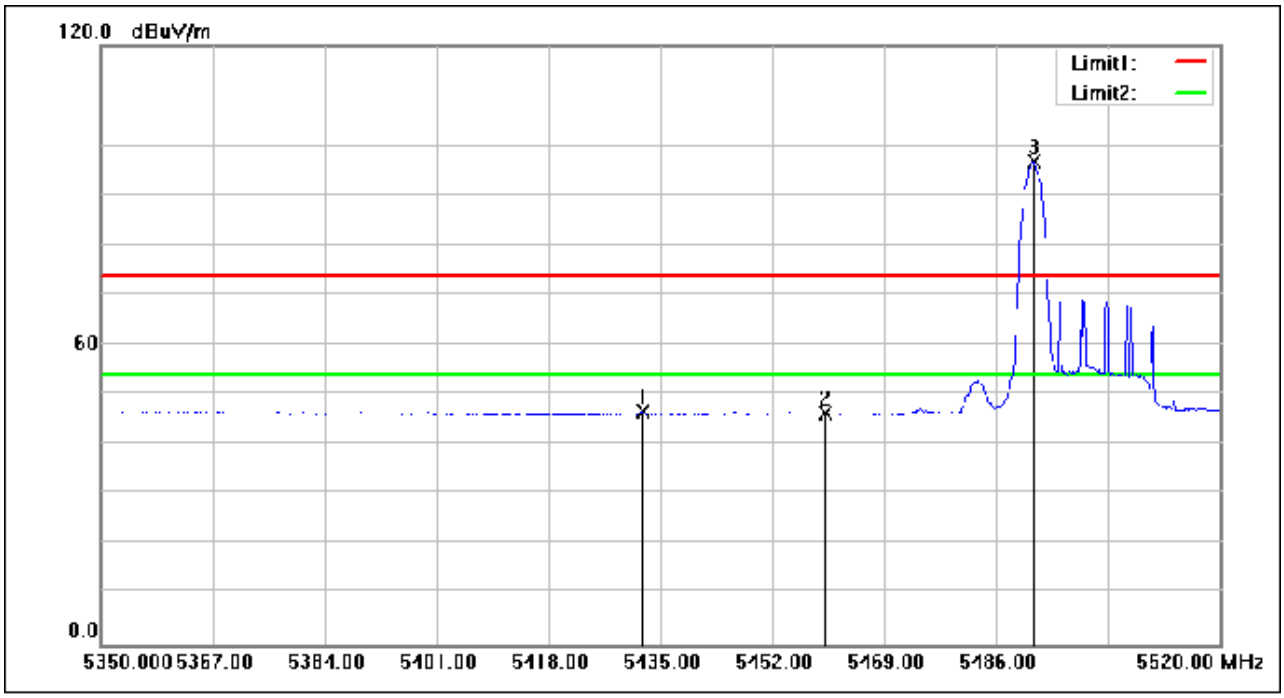


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.280	61.92	-15.34	46.58	54.00	-7.42	AVG
2	5460.000	61.64	-15.30	46.34	54.00	-7.66	AVG
3	5491.780	111.98	-15.26	96.72	54.00	42.72	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low




No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.590	79.99	-15.30	64.69	74.00	-9.31	peak
2	5460.000	82.44	-15.30	67.14	74.00	-6.86	peak
3	5492.120	130.81	-15.25	115.56	74.00	41.56	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

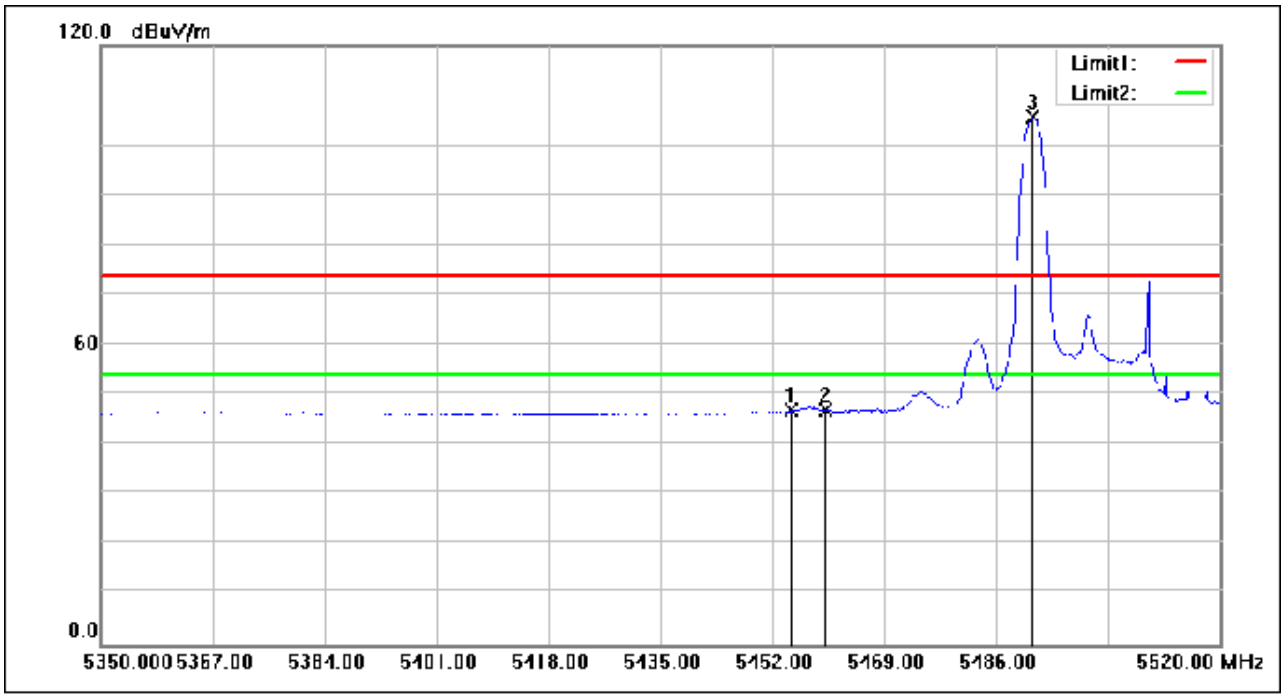


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.720	62.15	-15.30	46.85	54.00	-7.15	AVG
2	5460.000	62.28	-15.30	46.98	54.00	-7.02	AVG
3	5491.440	121.05	-15.26	105.79	54.00	51.79	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

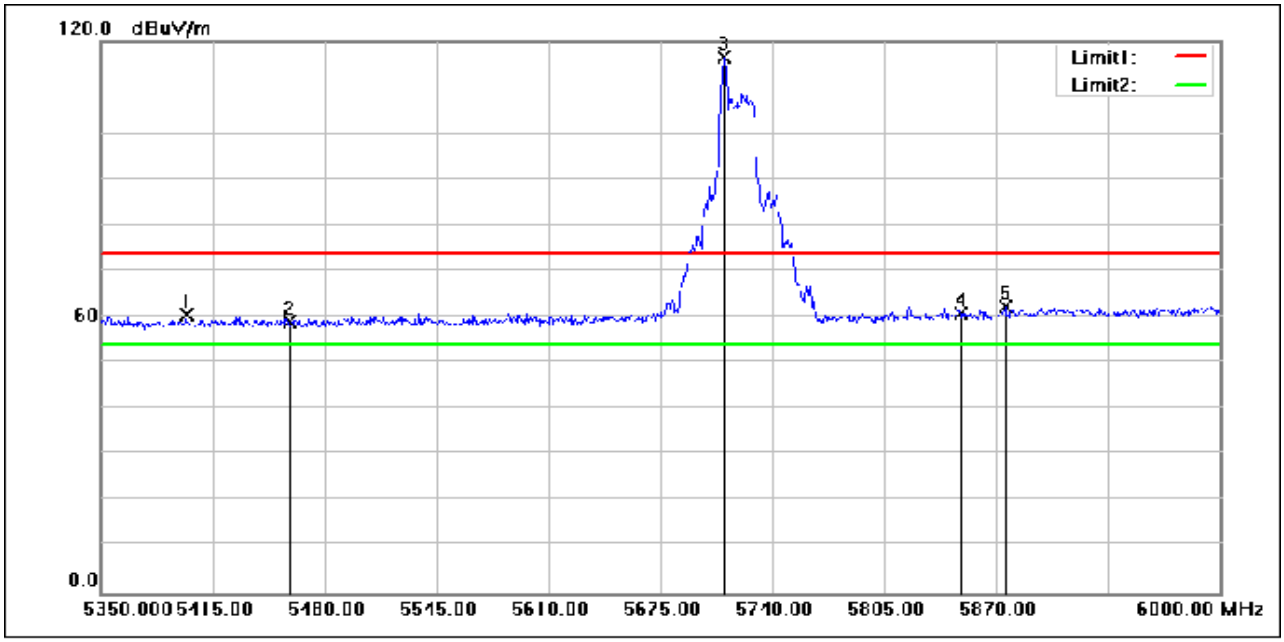


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5399.400	75.79	-15.40	60.39	74.00	-13.61	peak
2	5460.000	74.37	-15.30	59.07	74.00	-14.93	peak
3	5712.050	131.13	-14.63	116.50	74.00	42.50	peak
4	5850.000	74.90	-14.03	60.87	74.00	-13.13	peak
5	5875.200	76.10	-13.87	62.23	74.00	-11.77	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

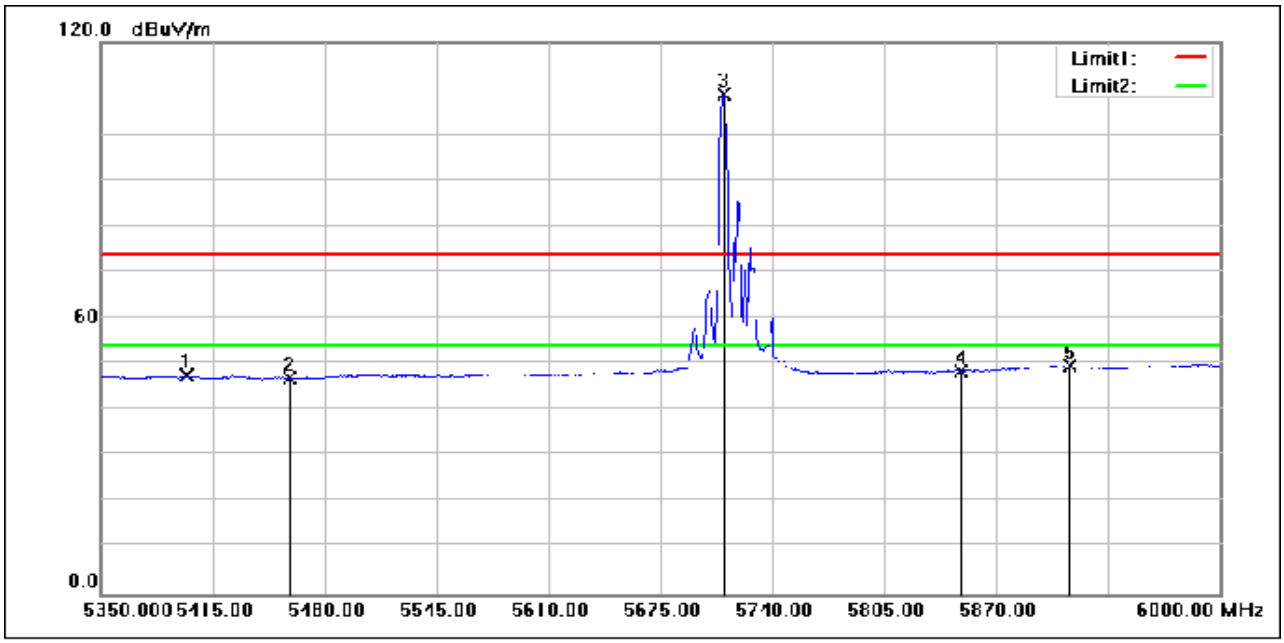


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5400.050	62.88	-15.40	47.48	54.00	-6.52	AVG
2	5460.000	62.38	-15.30	47.08	54.00	-6.92	AVG
3	5712.050	123.26	-14.63	108.63	54.00	54.63	AVG
4	5850.000	62.53	-14.03	48.50	54.00	-5.50	AVG
5	5912.900	63.22	-13.63	49.59	54.00	-4.41	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

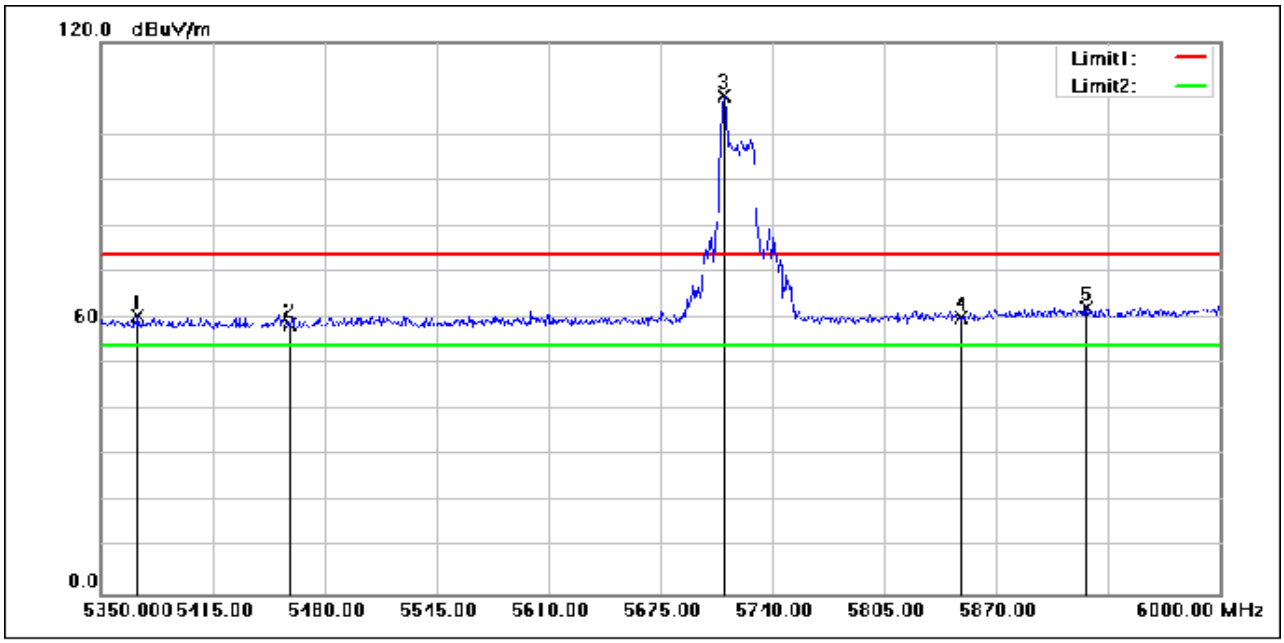


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5371.450	75.91	-15.45	60.46	74.00	-13.54	peak
2	5460.000	73.89	-15.30	58.59	74.00	-15.41	peak
3	5712.050	123.20	-14.63	108.57	74.00	34.57	peak
4	5850.000	74.18	-14.03	60.15	74.00	-13.85	peak
5	5922.000	75.87	-13.57	62.30	74.00	-11.70	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

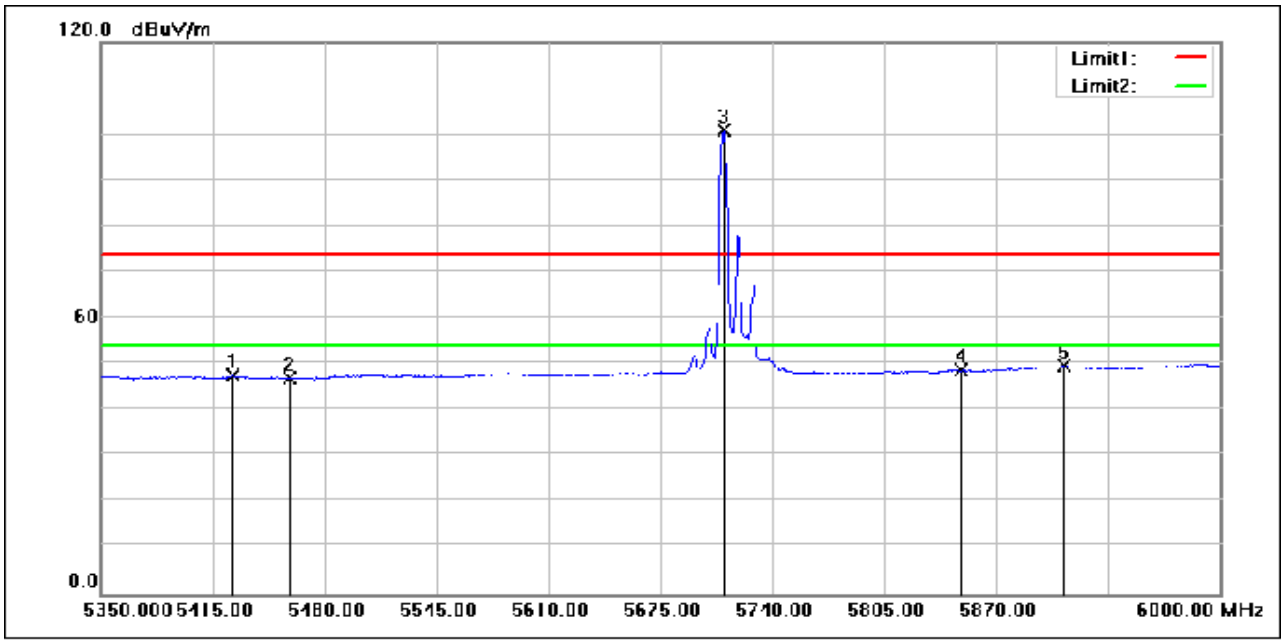


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.700	62.90	-15.36	47.54	54.00	-6.46	AVG
2	5460.000	62.12	-15.30	46.82	54.00	-7.18	AVG
3	5711.400	115.57	-14.63	100.94	54.00	46.94	AVG
4	5850.000	62.68	-14.03	48.65	54.00	-5.35	AVG
5	5909.650	63.24	-13.65	49.59	54.00	-4.41	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

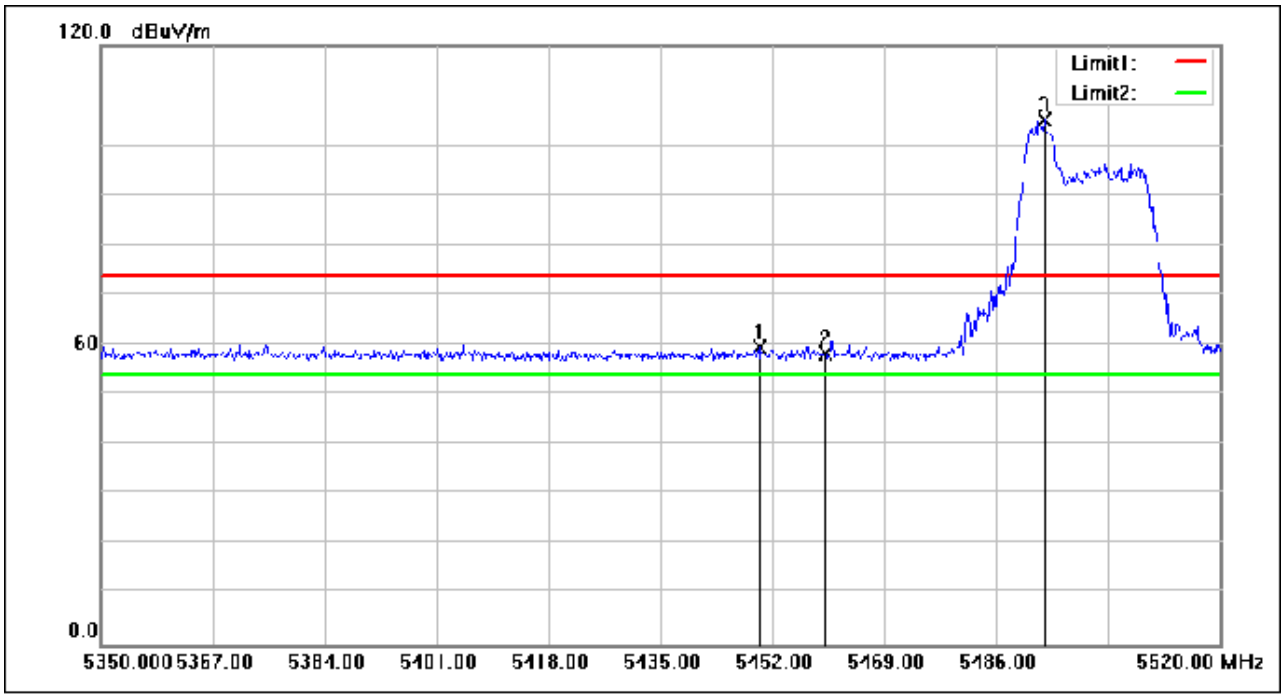


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.960	74.93	-15.32	59.61	74.00	-14.39	peak
2	5460.000	73.71	-15.30	58.41	74.00	-15.59	peak
3	5493.310	120.37	-15.25	105.12	74.00	31.12	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

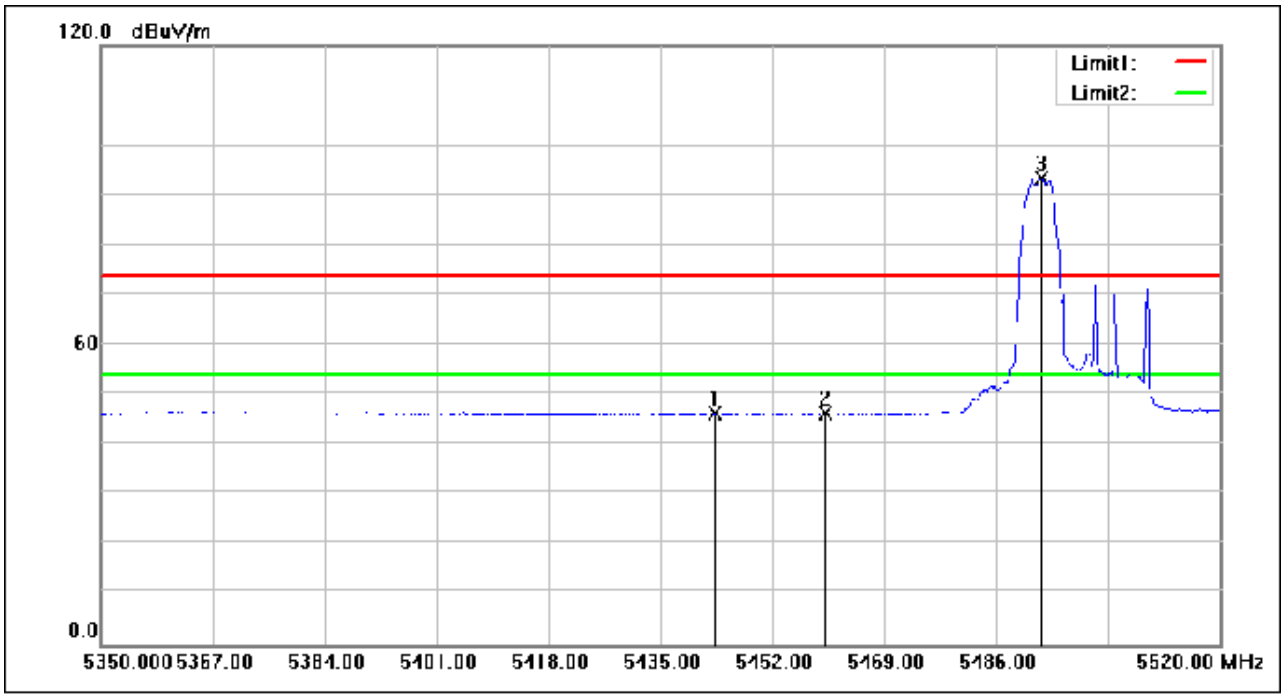


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.330	61.75	-15.32	46.43	54.00	-7.57	AVG
2	5460.000	61.57	-15.30	46.27	54.00	-7.73	AVG
3	5492.800	108.73	-15.25	93.48	54.00	39.48	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

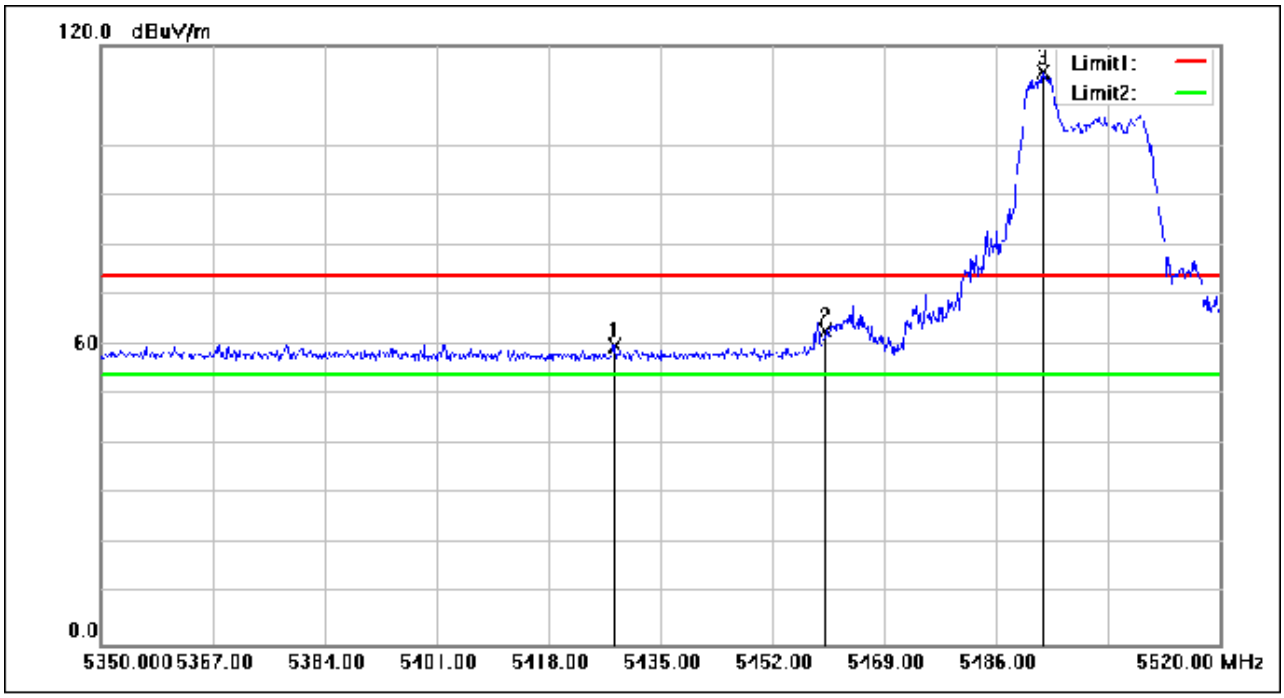


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5428.030	75.31	-15.35	59.96	74.00	-14.04	peak
2	5460.000	78.14	-15.30	62.84	74.00	-11.16	peak
3	5493.140	130.13	-15.25	114.88	74.00	40.88	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

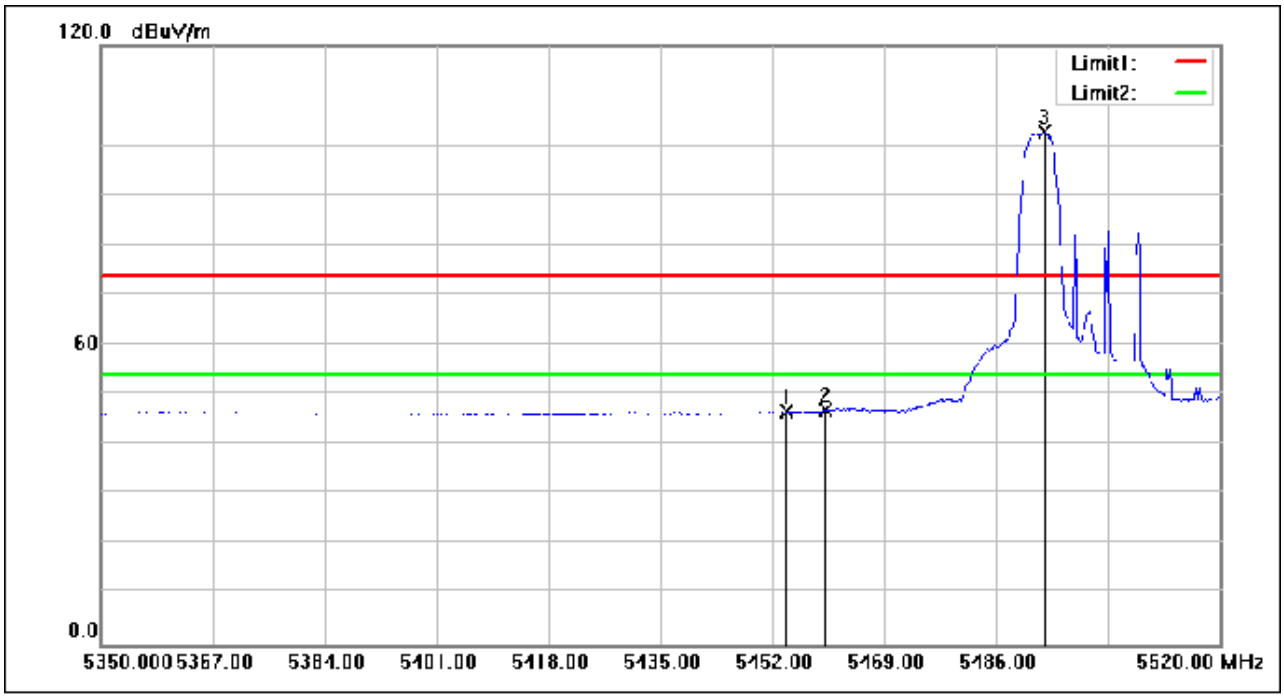


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.210	61.97	-15.30	46.67	54.00	-7.33	AVG
2	5460.000	62.36	-15.30	47.06	54.00	-6.94	AVG
3	5493.310	117.97	-15.25	102.72	54.00	48.72	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

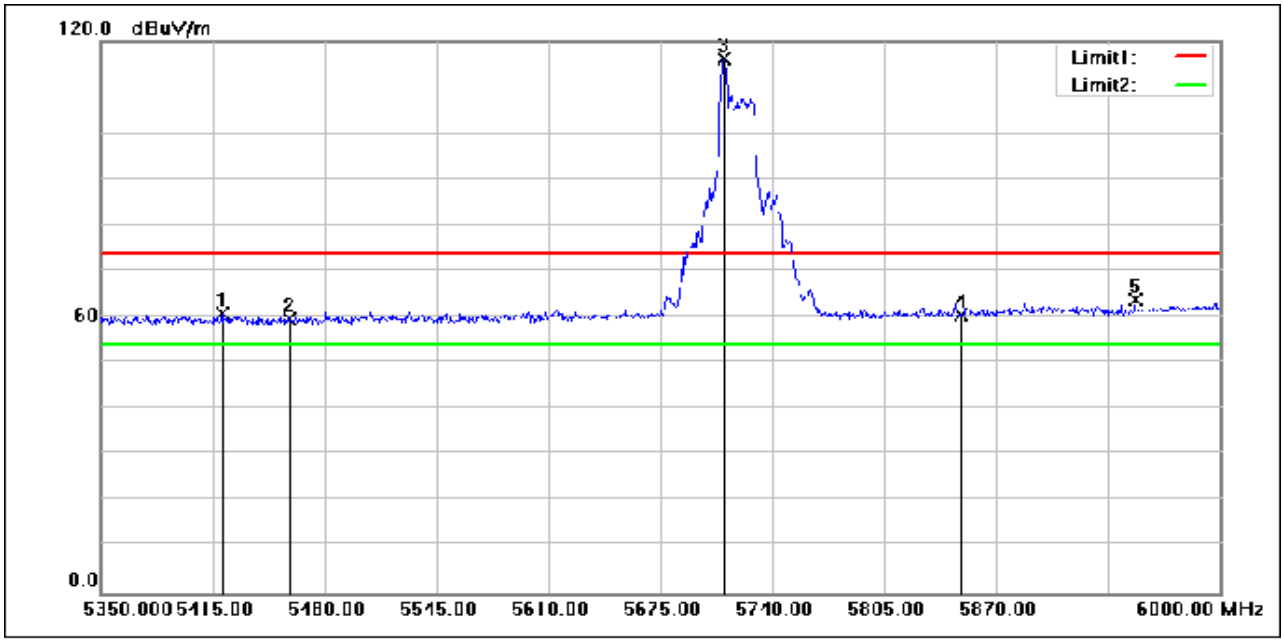


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.200	75.97	-15.36	60.61	74.00	-13.39	peak
2	5460.000	74.73	-15.30	59.43	74.00	-14.57	peak
3	5712.050	130.93	-14.63	116.30	74.00	42.30	peak
4	5850.000	74.55	-14.03	60.52	74.00	-13.48	peak
5	5950.600	77.03	-13.39	63.64	74.00	-10.36	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

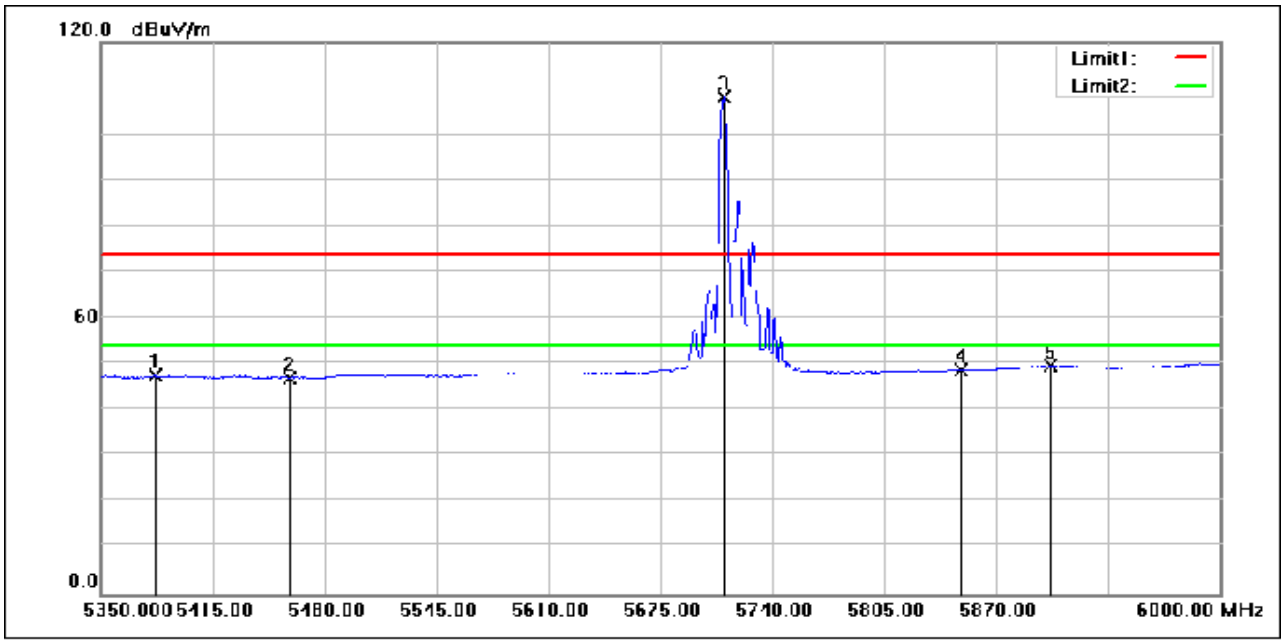


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5381.200	62.98	-15.43	47.55	54.00	-6.45	AVG
2	5460.000	62.34	-15.30	47.04	54.00	-6.96	AVG
3	5711.400	122.90	-14.63	108.27	54.00	54.27	AVG
4	5850.000	62.67	-14.03	48.64	54.00	-5.36	AVG
5	5901.850	63.37	-13.70	49.67	54.00	-4.33	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

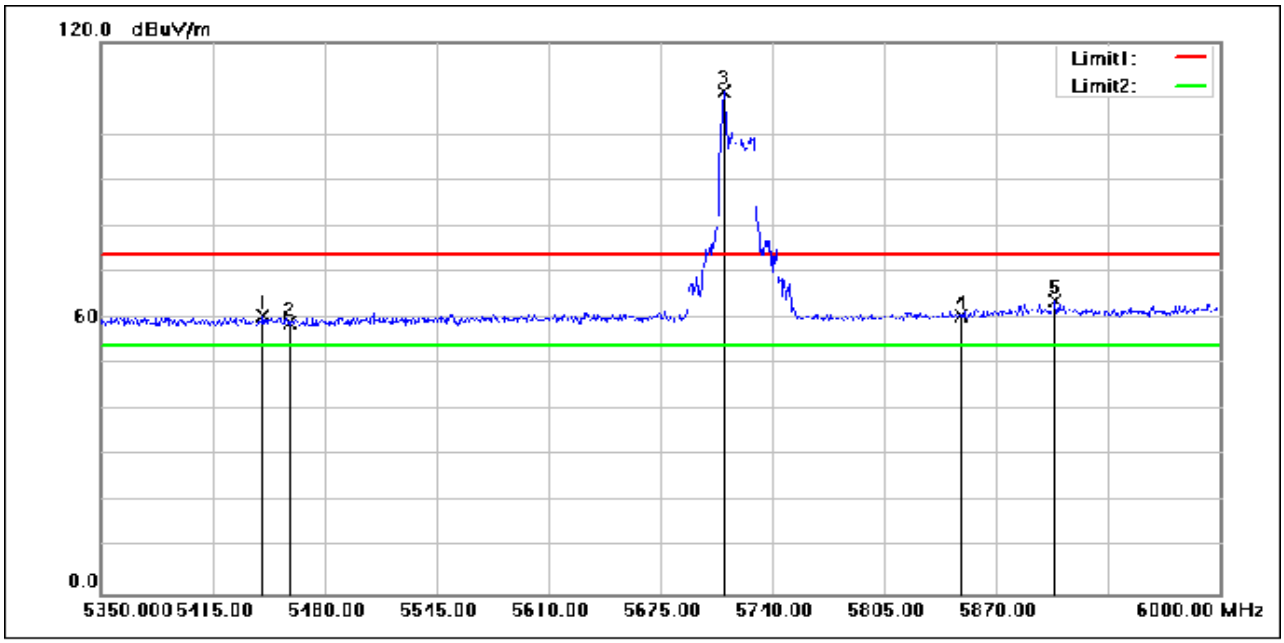


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.250	75.89	-15.32	60.57	74.00	-13.43	peak
2	5460.000	74.28	-15.30	58.98	74.00	-15.02	peak
3	5711.400	123.91	-14.63	109.28	74.00	35.28	peak
4	5850.000	74.41	-14.03	60.38	74.00	-13.62	peak
5	5903.800	77.32	-13.69	63.63	74.00	-10.37	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

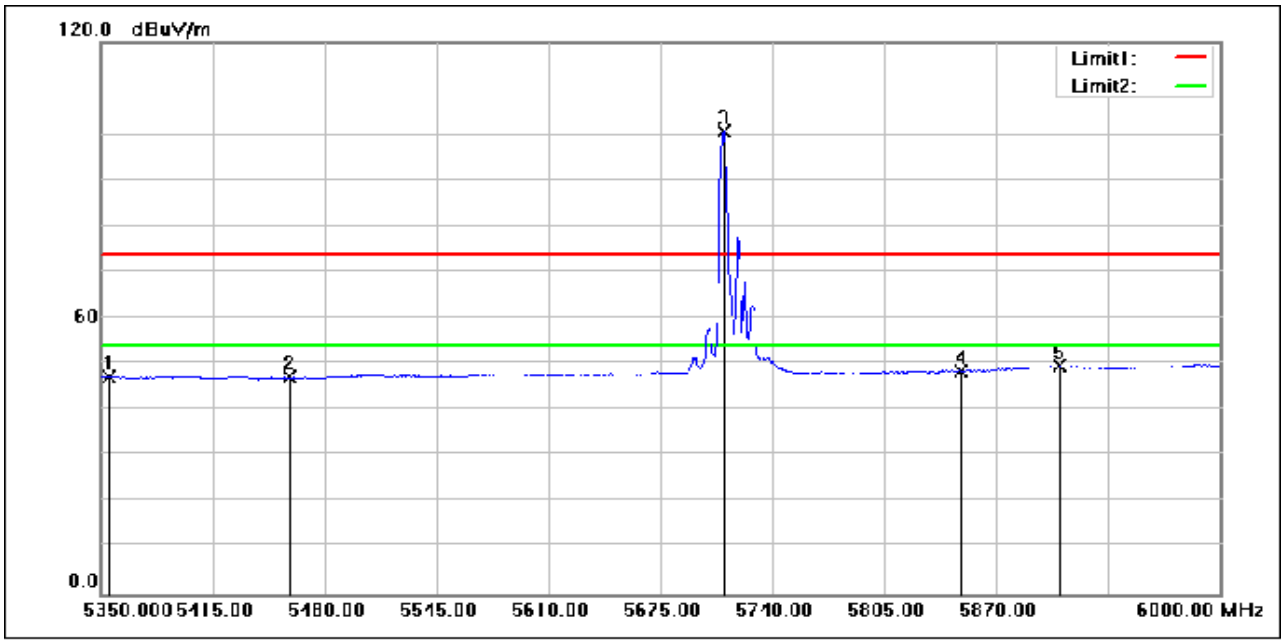


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5354.550	62.89	-15.49	47.40	54.00	-6.60	AVG
2	5460.000	62.41	-15.30	47.11	54.00	-6.89	AVG
3	5711.400	115.31	-14.63	100.68	54.00	46.68	AVG
4	5850.000	62.61	-14.03	48.58	54.00	-5.42	AVG
5	5907.050	63.26	-13.67	49.59	54.00	-4.41	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

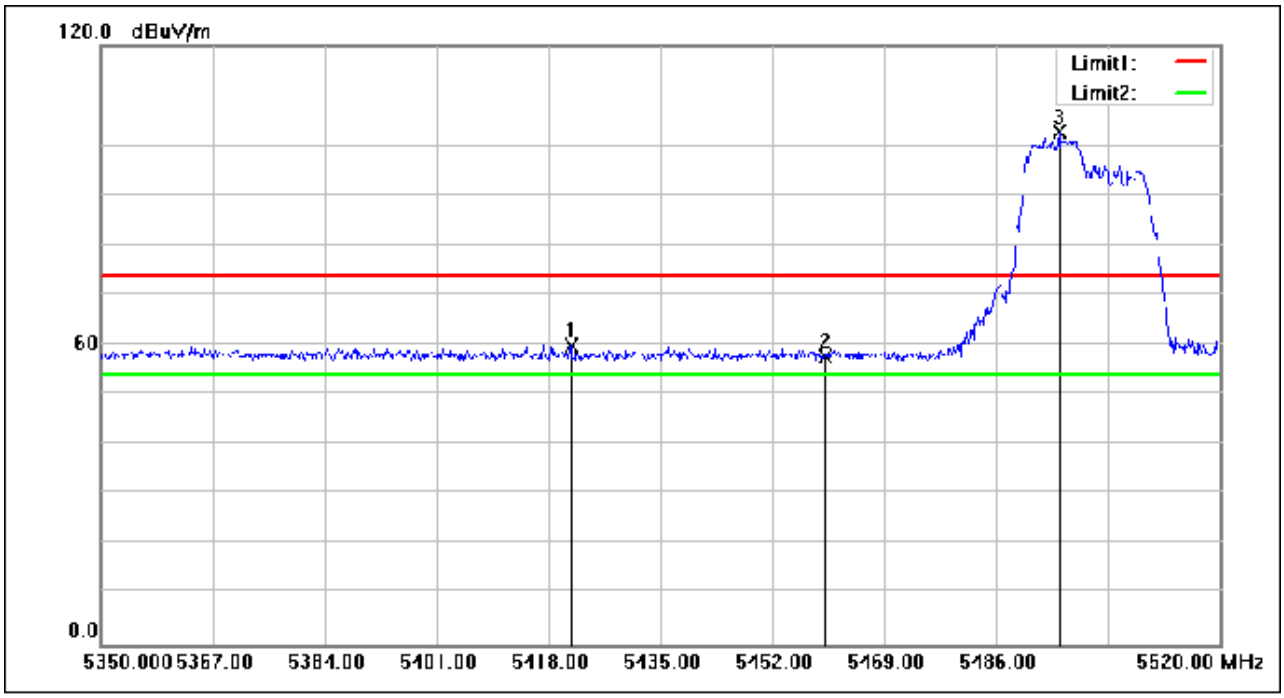


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5421.400	75.10	-15.36	59.74	74.00	-14.26	peak
2	5460.000	73.13	-15.30	57.83	74.00	-16.17	peak
3	5495.520	118.12	-15.25	102.87	74.00	28.87	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

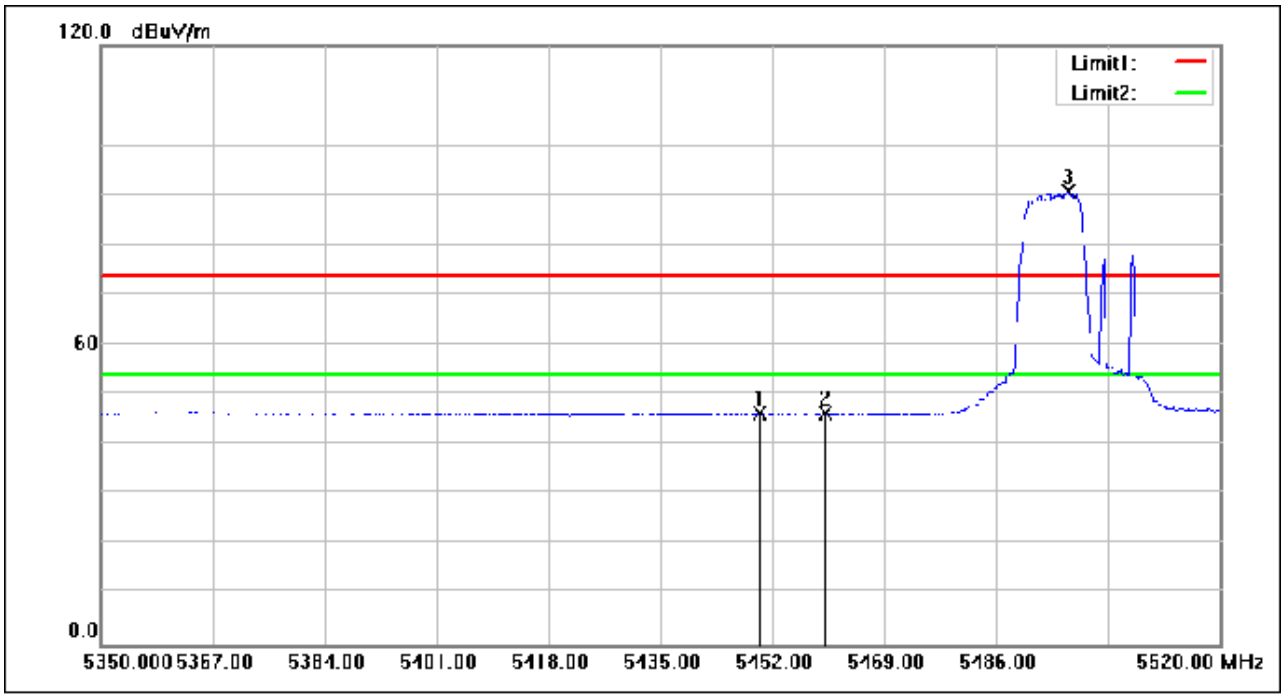


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.130	61.77	-15.32	46.45	54.00	-7.55	AVG
2	5460.000	61.56	-15.30	46.26	54.00	-7.74	AVG
3	5497.050	105.95	-15.25	90.70	54.00	36.70	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

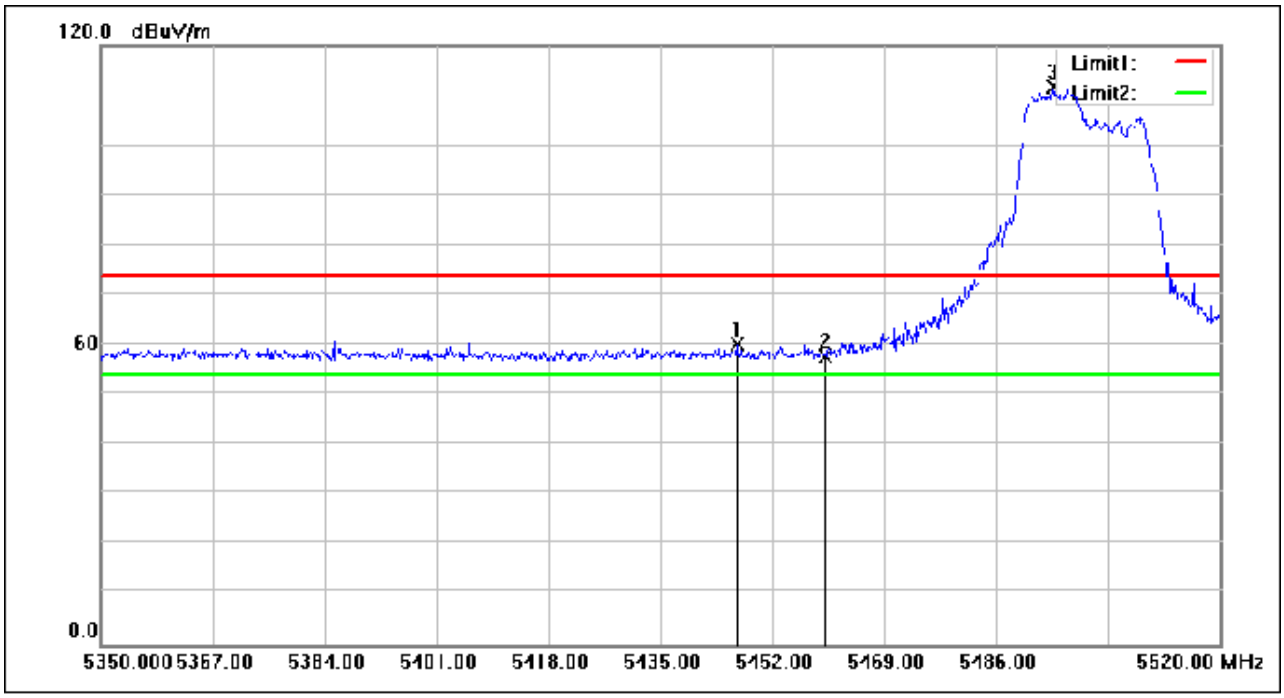


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.560	75.51	-15.32	60.19	74.00	-13.81	peak
2	5460.000	73.18	-15.30	57.88	74.00	-16.12	peak
3	5494.670	127.14	-15.25	111.89	74.00	37.89	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

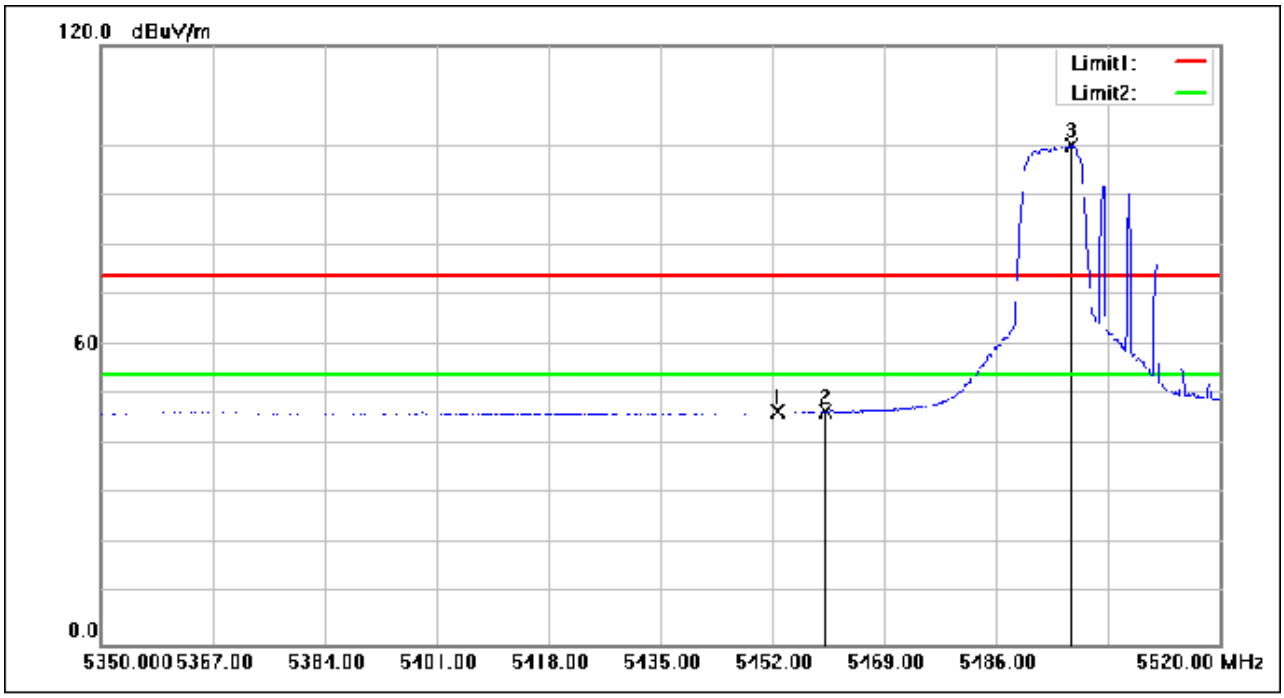


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.680	61.89	-15.30	46.59	54.00	-7.41	AVG
2	5460.000	61.84	-15.30	46.54	54.00	-7.46	AVG
3	5497.390	115.34	-15.25	100.09	54.00	46.09	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

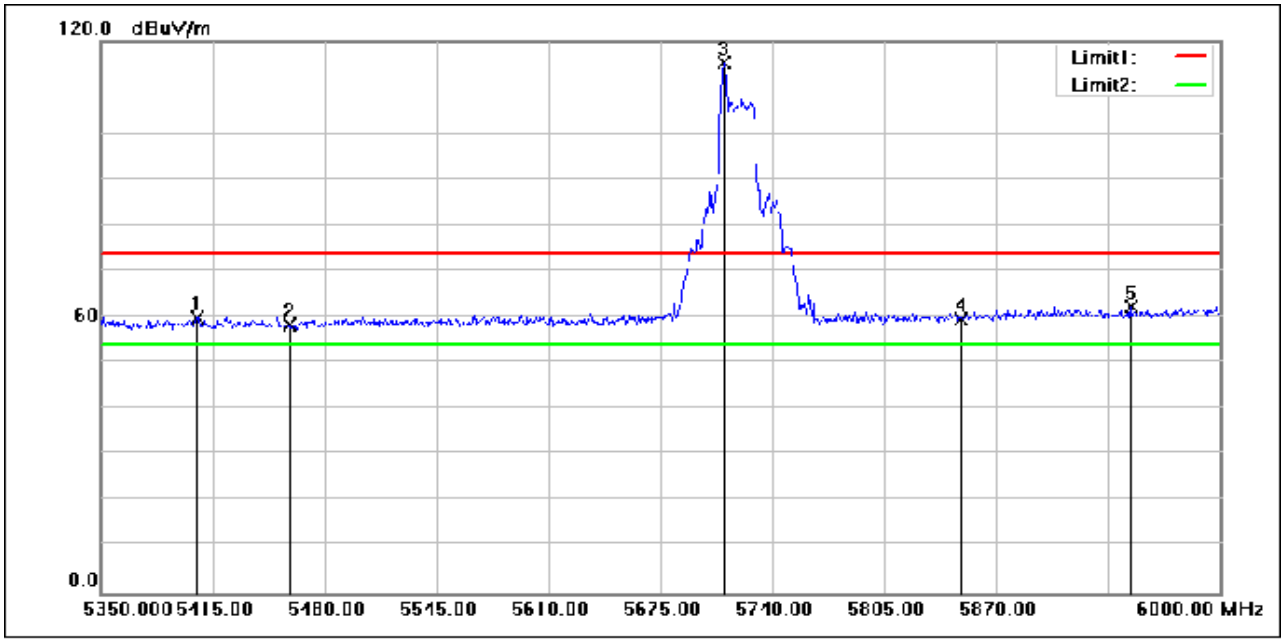


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5405.900	75.22	-15.39	59.83	74.00	-14.17	peak
2	5460.000	73.59	-15.30	58.29	74.00	-15.71	peak
3	5711.400	130.00	-14.63	115.37	74.00	41.37	peak
4	5850.000	73.62	-14.03	59.59	74.00	-14.41	peak
5	5948.000	75.78	-13.41	62.37	74.00	-11.63	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

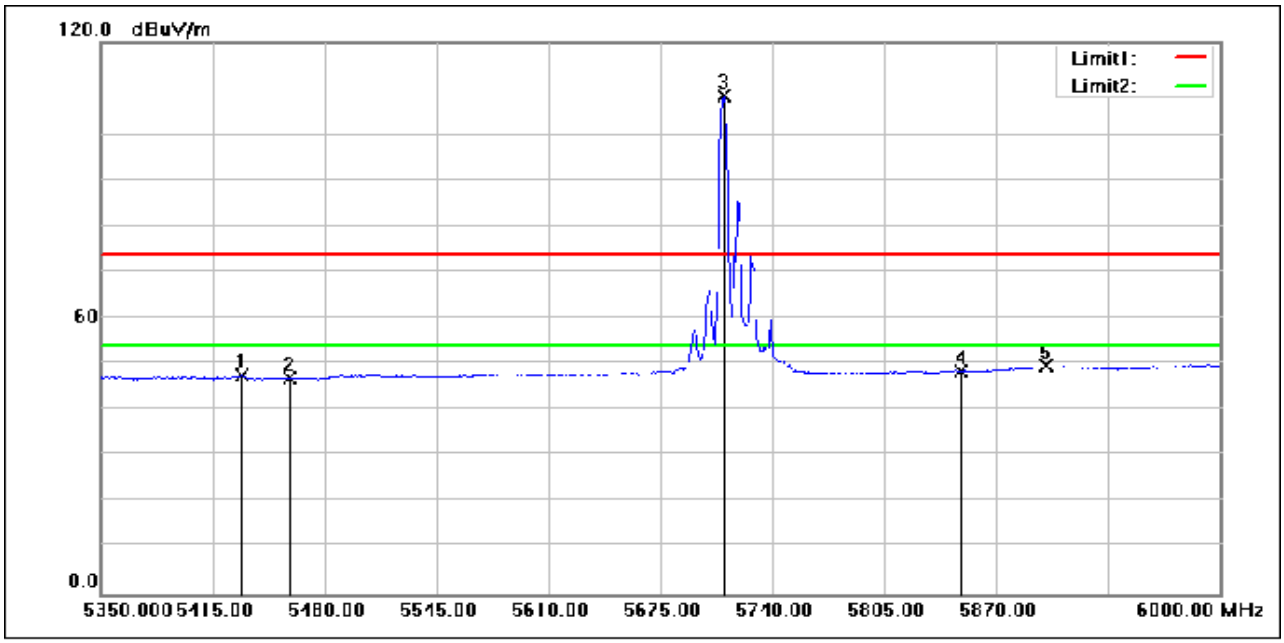


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.900	62.79	-15.34	47.45	54.00	-6.55	AVG
2	5460.000	62.14	-15.30	46.84	54.00	-7.16	AVG
3	5711.400	123.06	-14.63	108.43	54.00	54.43	AVG
4	5850.000	62.51	-14.03	48.48	54.00	-5.52	AVG
5	5898.600	63.30	-13.72	49.58	54.00	-4.42	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

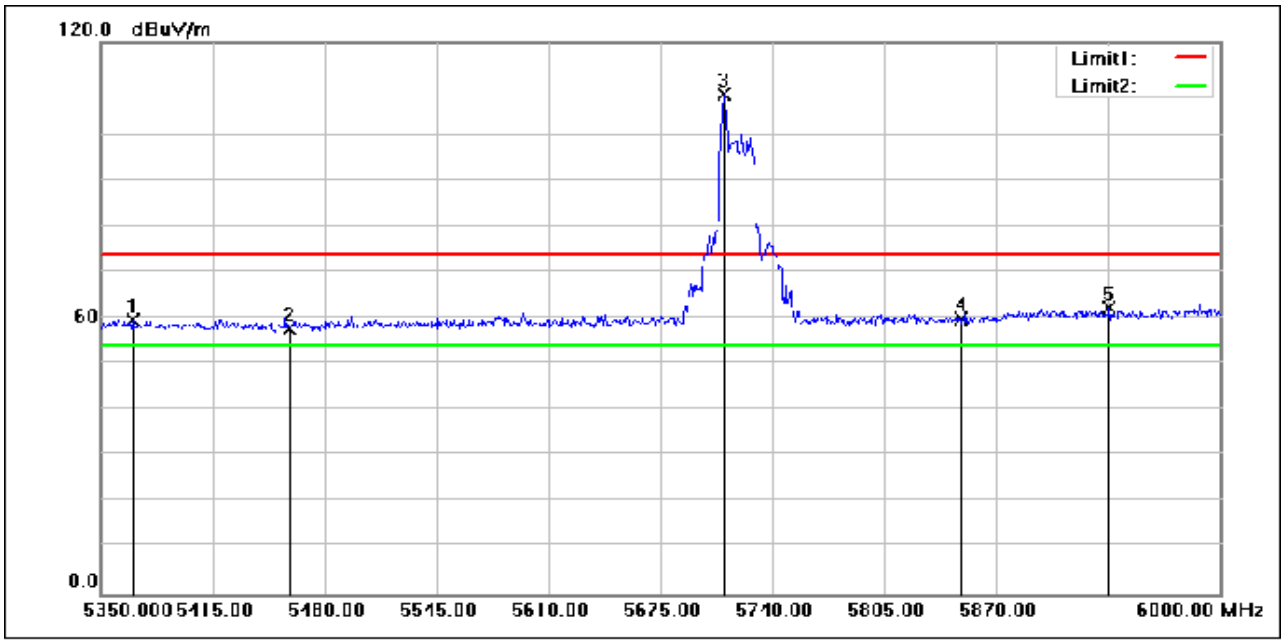


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5368.200	75.09	-15.46	59.63	74.00	-14.37	peak
2	5460.000	73.08	-15.30	57.78	74.00	-16.22	peak
3	5711.400	123.50	-14.63	108.87	74.00	34.87	peak
4	5850.000	73.83	-14.03	59.80	74.00	-14.20	peak
5	5935.650	75.66	-13.48	62.18	74.00	-11.82	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

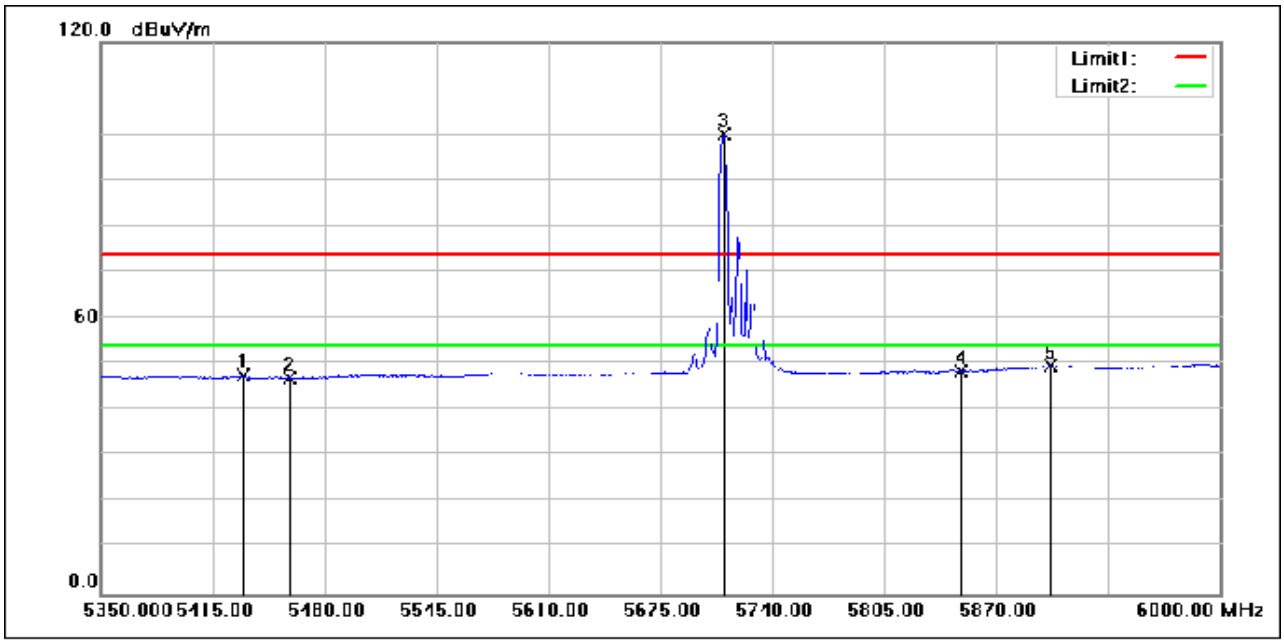


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.550	62.75	-15.34	47.41	54.00	-6.59	AVG
2	5460.000	62.23	-15.30	46.93	54.00	-7.07	AVG
3	5712.050	114.77	-14.63	100.14	54.00	46.14	AVG
4	5850.000	62.52	-14.03	48.49	54.00	-5.51	AVG
5	5901.200	63.29	-13.70	49.59	54.00	-4.41	AVG

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

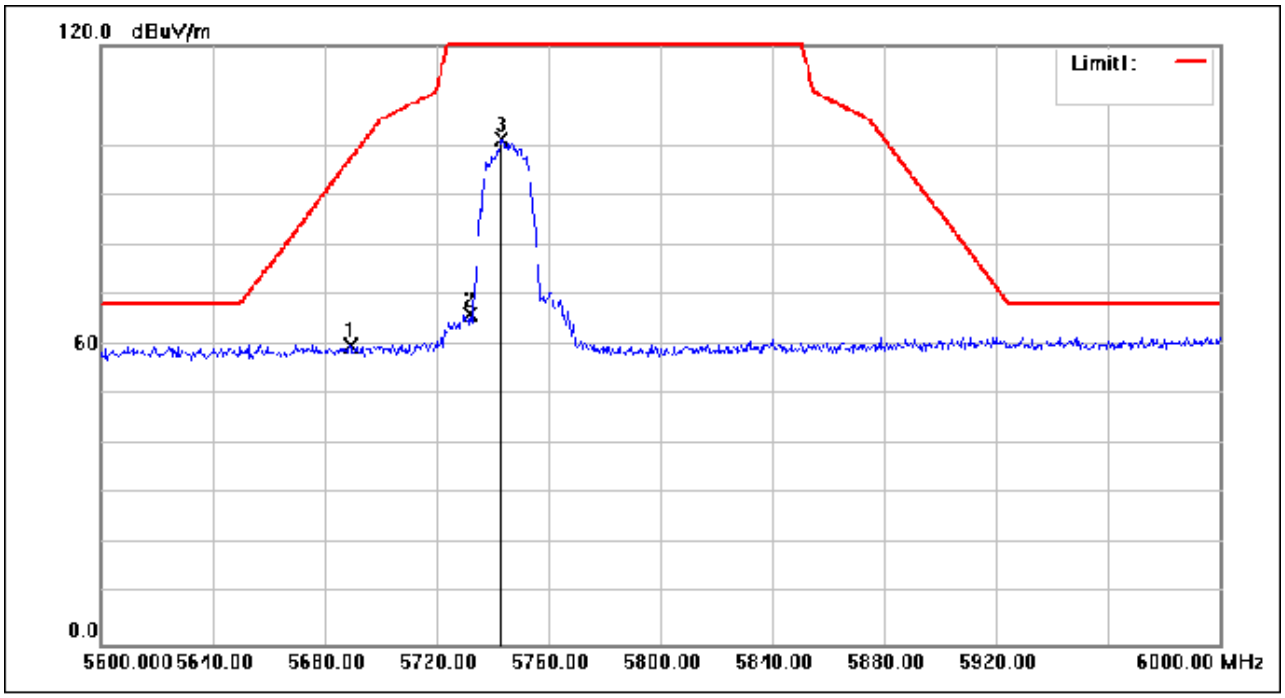


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5689.200	74.49	-14.71	59.78	97.21	-37.43	peak
2	5732.000	80.78	-14.55	66.23	135.00	-68.77	peak
3	5743.200	115.68	-14.51	101.17	135.00	-33.83	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

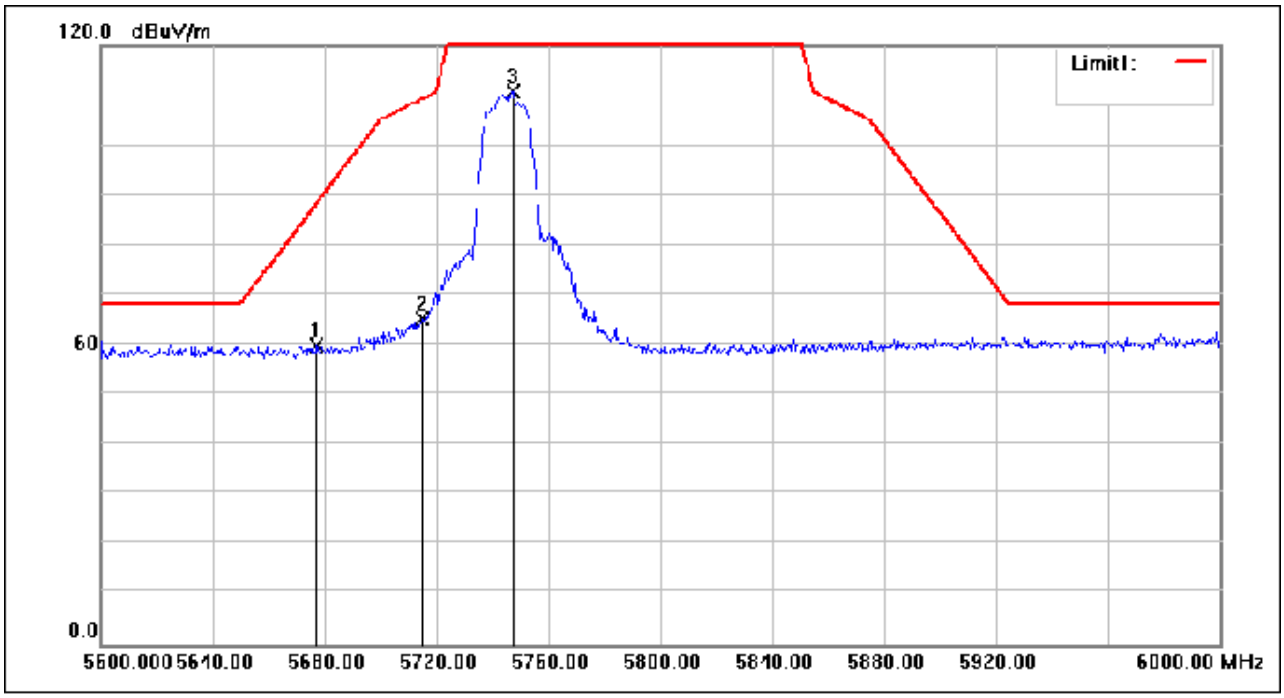


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5677.200	74.54	-14.76	59.78	88.33	-28.55	peak
2	5714.800	79.77	-14.62	65.15	109.34	-44.19	peak
3	5747.200	125.22	-14.48	110.74	135.00	-24.26	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

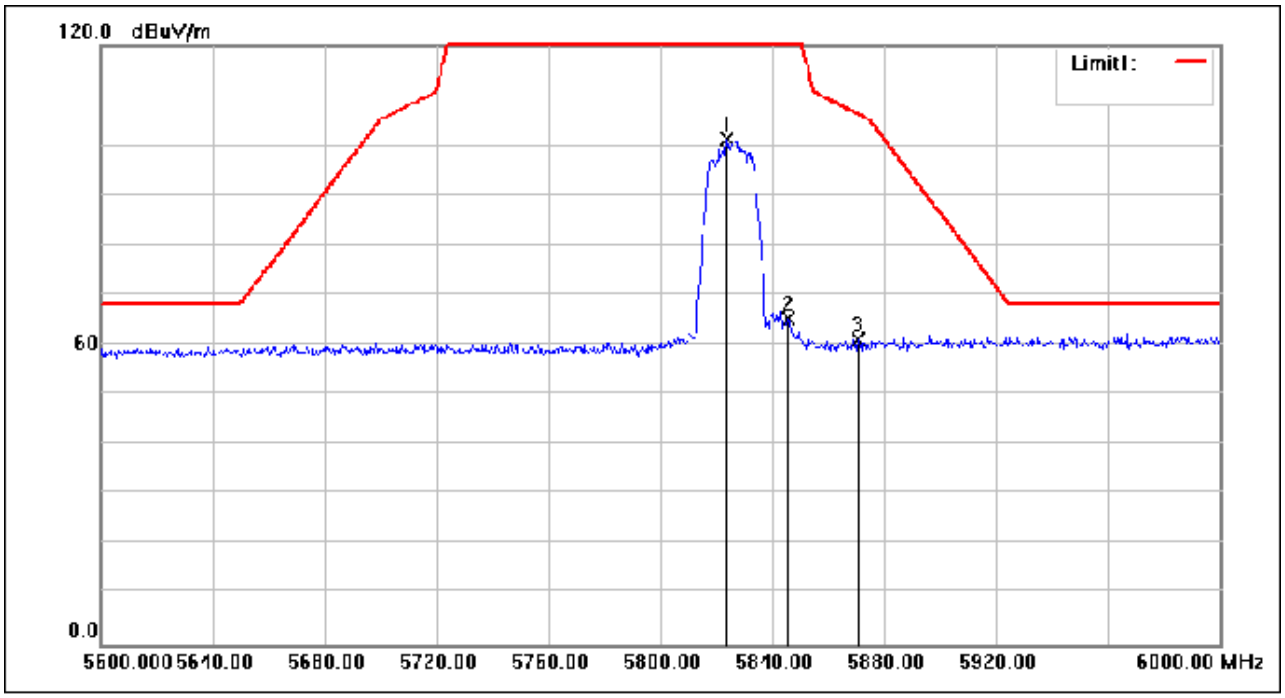


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.600	115.30	-14.14	101.16	135.00	-33.84	peak
2	5845.600	79.26	-14.04	65.22	135.00	-69.78	peak
3	5870.400	74.90	-13.90	61.00	106.49	-45.49	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

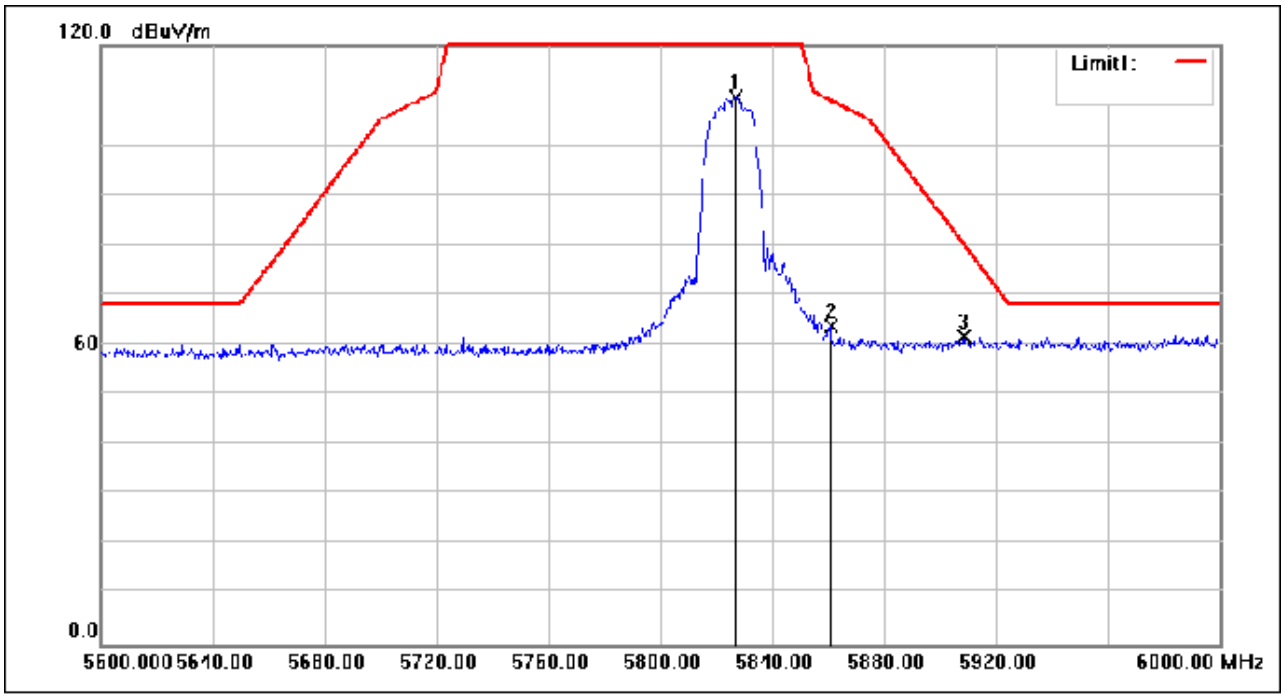


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.800	123.65	-14.13	109.52	135.00	-25.48	peak
2	5860.800	77.73	-13.96	63.77	109.18	-45.41	peak
3	5908.400	75.23	-13.65	61.58	80.48	-18.90	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

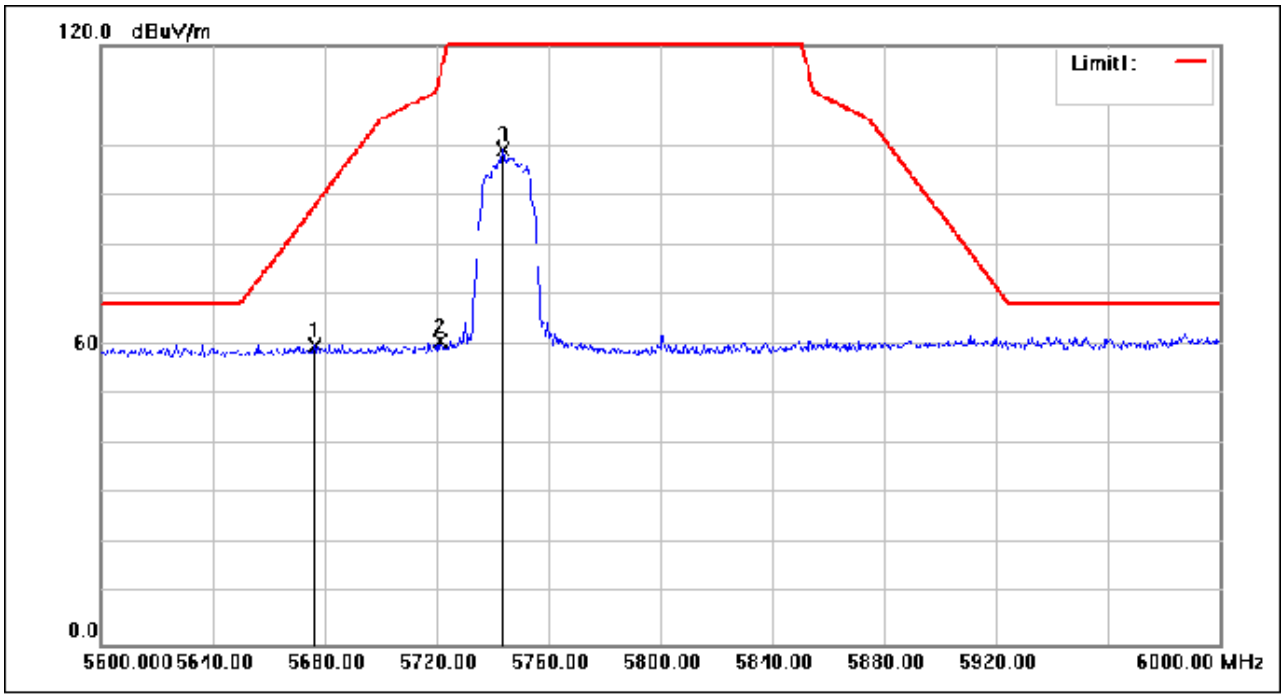


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5676.400	74.61	-14.76	59.85	87.74	-27.89	peak
2	5721.200	75.31	-14.60	60.71	113.54	-52.83	peak
3	5743.600	113.55	-14.51	99.04	135.00	-35.96	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

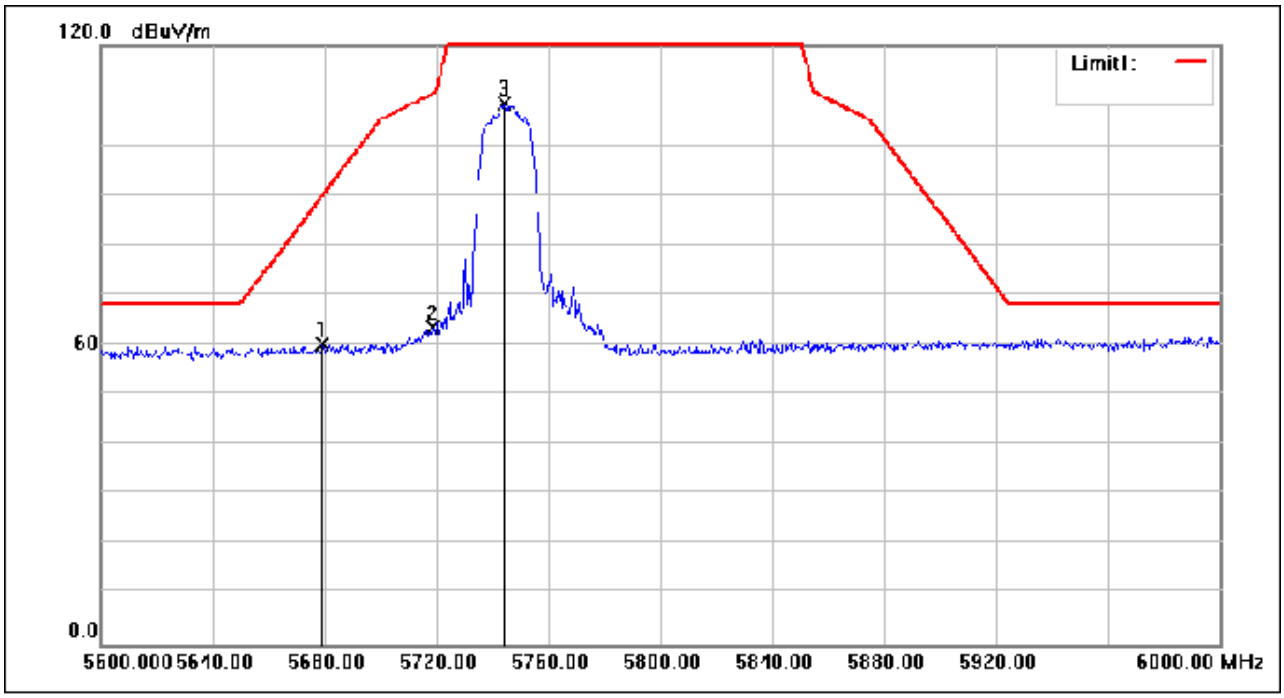


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5679.200	74.77	-14.75	60.02	89.81	-29.79	peak
2	5718.800	78.12	-14.61	63.51	110.46	-46.95	peak
3	5744.400	122.88	-14.49	108.39	135.00	-26.61	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

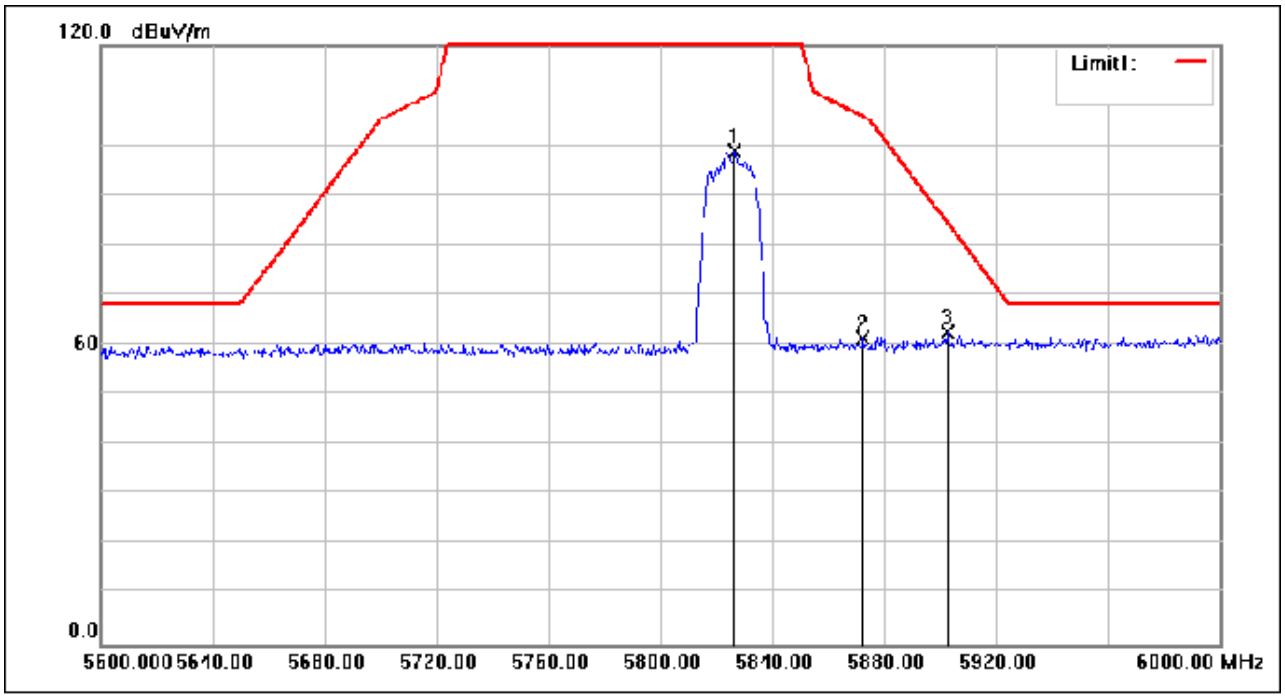


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.400	113.12	-14.13	98.99	135.00	-36.01	peak
2	5872.400	75.26	-13.89	61.37	105.93	-44.56	peak
3	5902.800	76.20	-13.69	62.51	84.63	-22.12	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

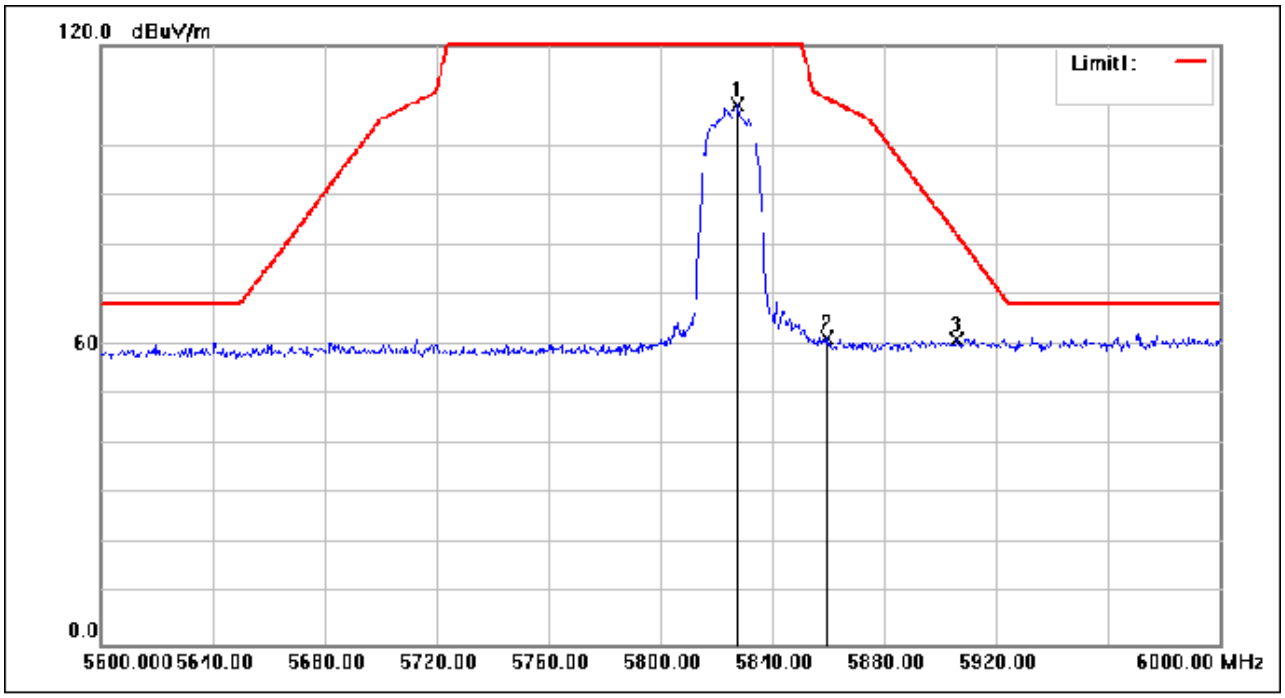


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5827.600	122.17	-14.13	108.04	135.00	-26.96	peak
2	5859.600	75.41	-13.96	61.45	109.51	-48.06	peak
3	5906.000	74.80	-13.67	61.13	82.26	-21.13	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

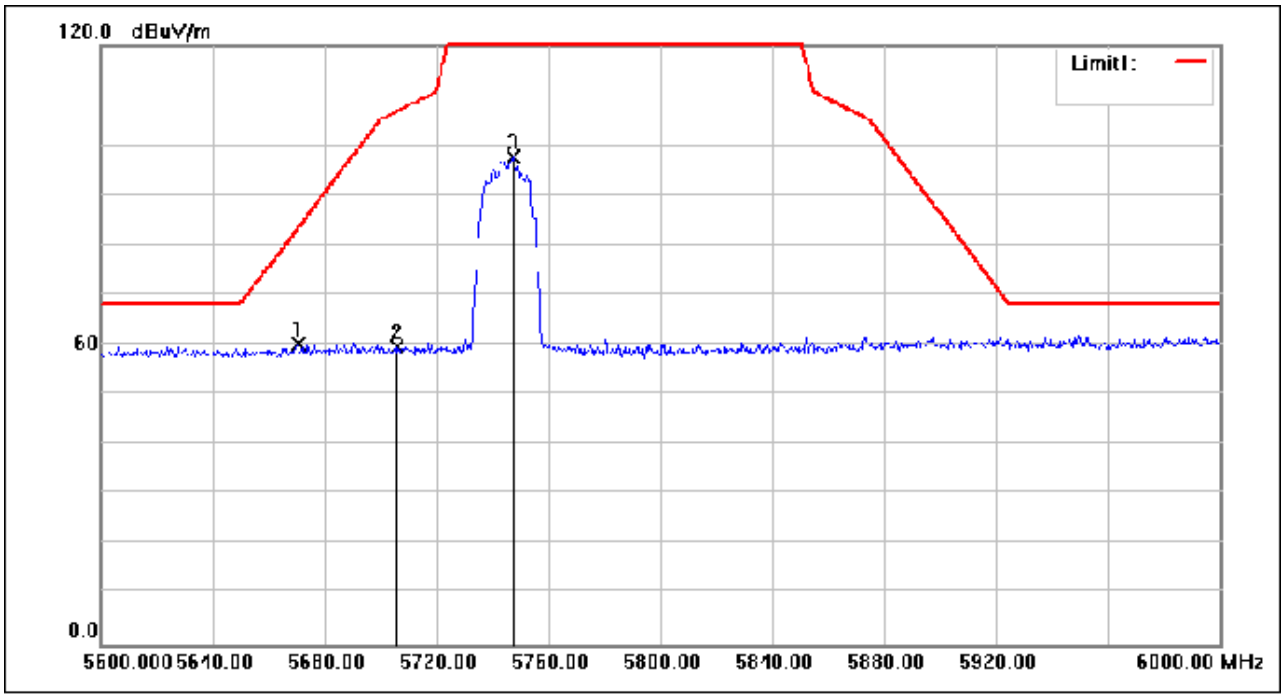


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.400	74.79	-14.78	60.01	83.30	-23.29	peak
2	5706.000	74.17	-14.65	59.52	106.88	-47.36	peak
3	5747.200	112.21	-14.48	97.73	135.00	-37.27	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

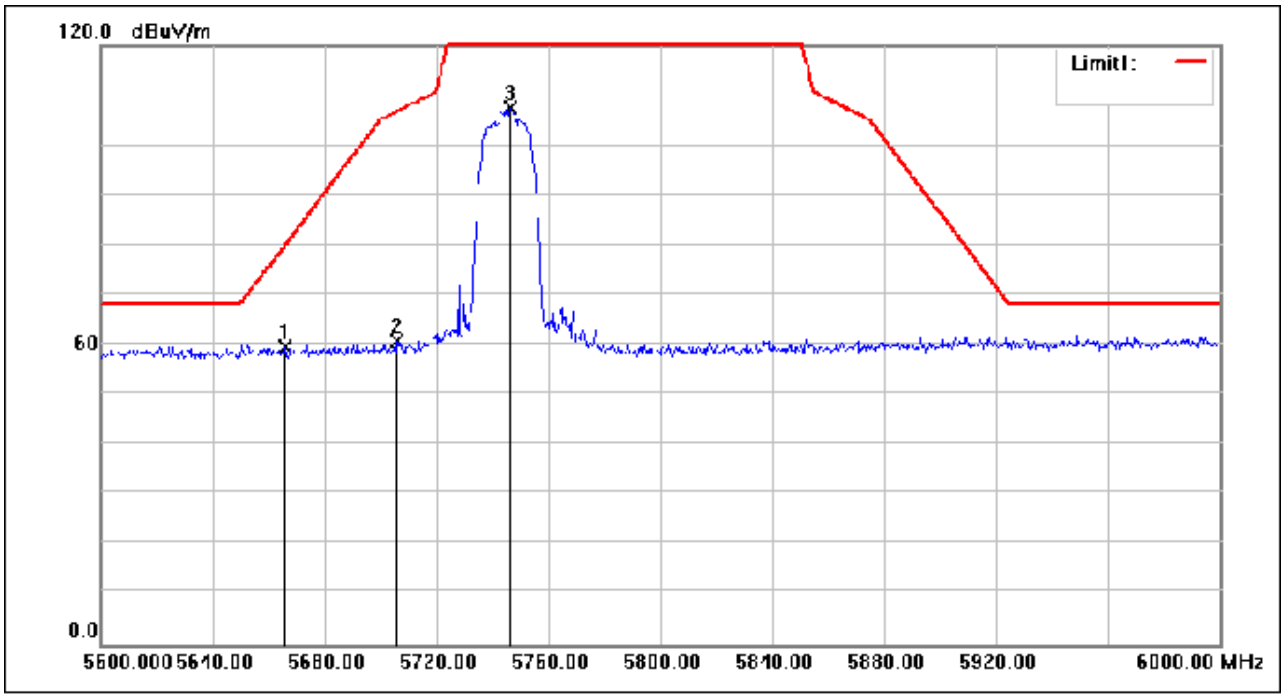


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5666.000	74.31	-14.80	59.51	80.04	-20.53	peak
2	5705.600	75.39	-14.65	60.74	106.77	-46.03	peak
3	5746.400	121.99	-14.49	107.50	135.00	-27.50	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

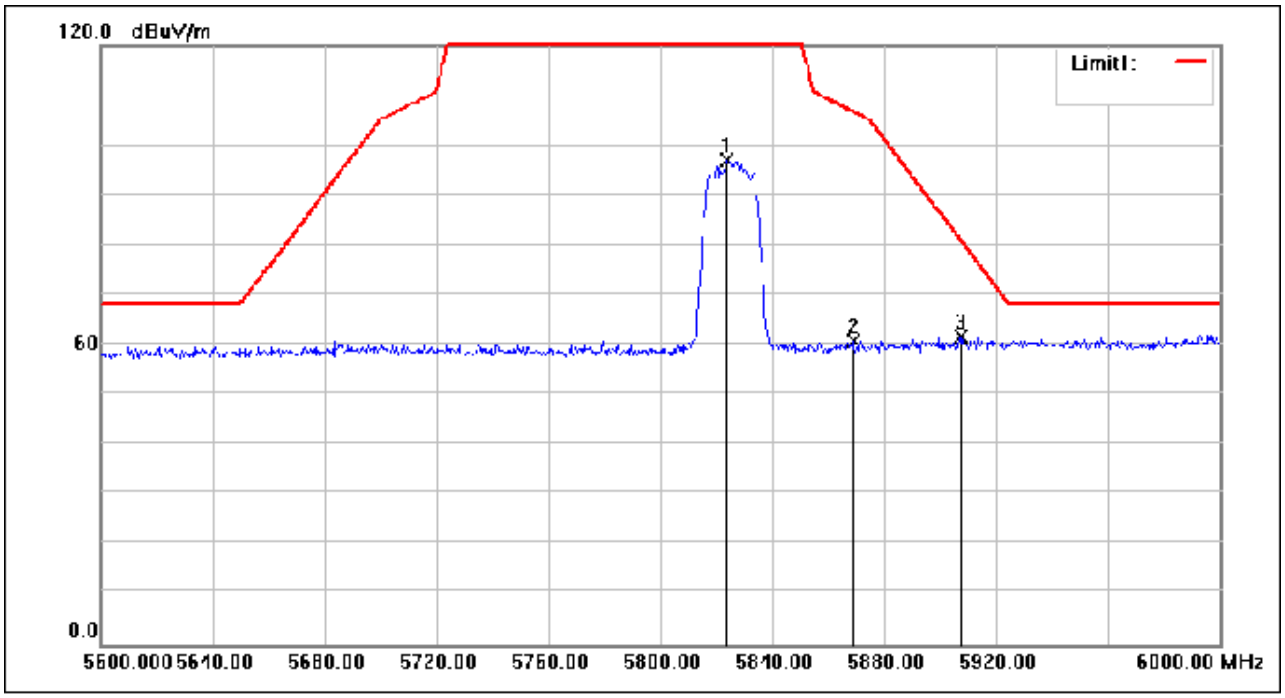


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.600	111.27	-14.14	97.13	135.00	-37.87	peak
2	5868.800	74.80	-13.91	60.89	106.94	-46.05	peak
3	5907.200	75.40	-13.67	61.73	81.37	-19.64	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

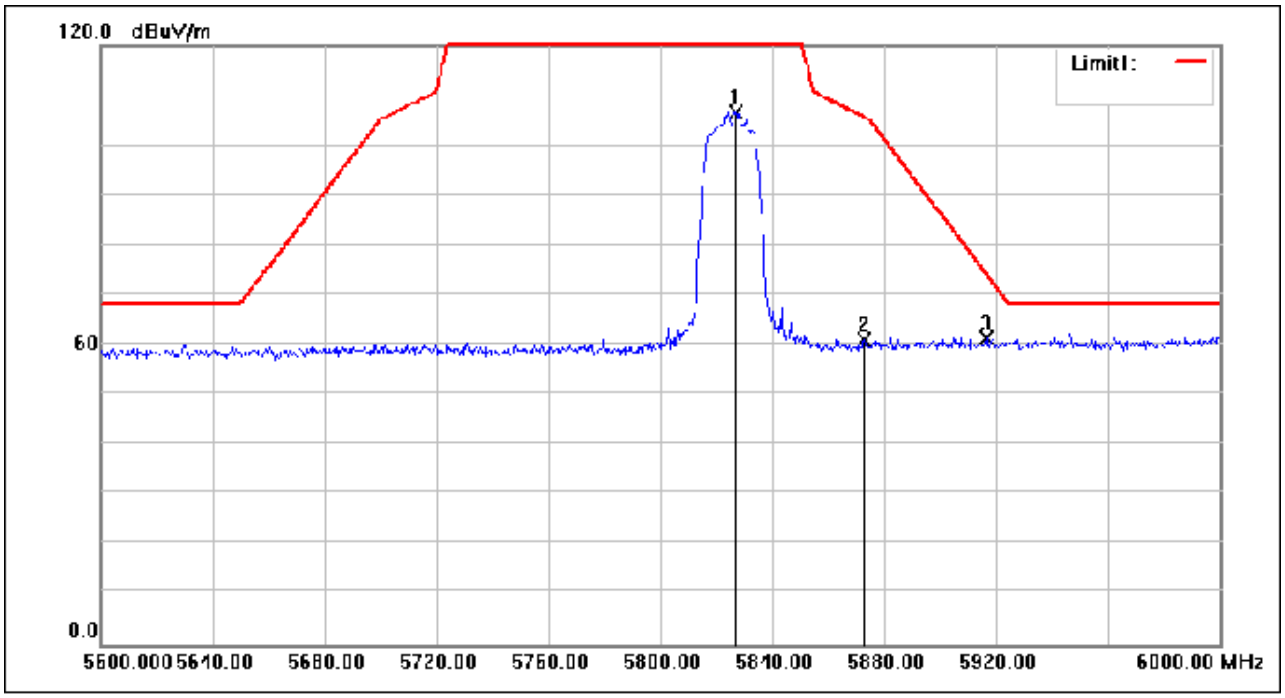


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.800	120.72	-14.13	106.59	135.00	-28.41	peak
2	5872.800	74.85	-13.88	60.97	105.82	-44.85	peak
3	5916.400	74.83	-13.61	61.22	74.56	-13.34	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

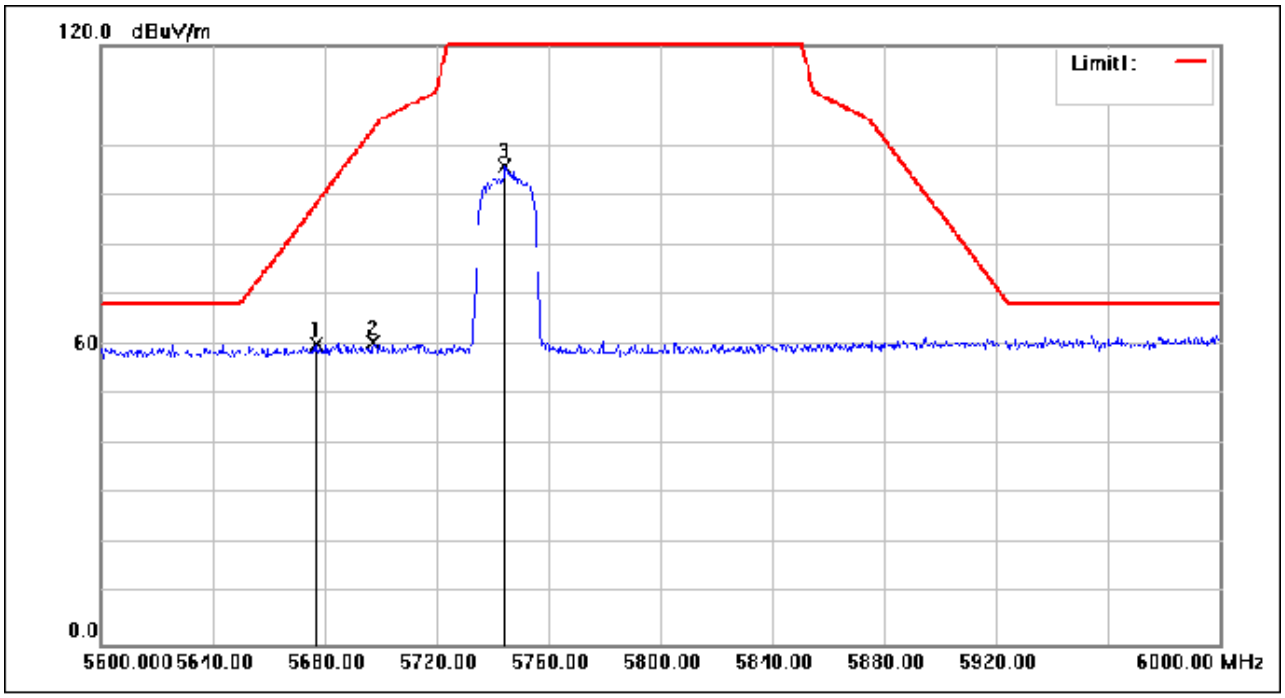


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5676.800	74.82	-14.76	60.06	88.03	-27.97	peak
2	5697.200	75.09	-14.69	60.40	103.13	-42.73	peak
3	5744.400	110.28	-14.49	95.79	135.00	-39.21	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

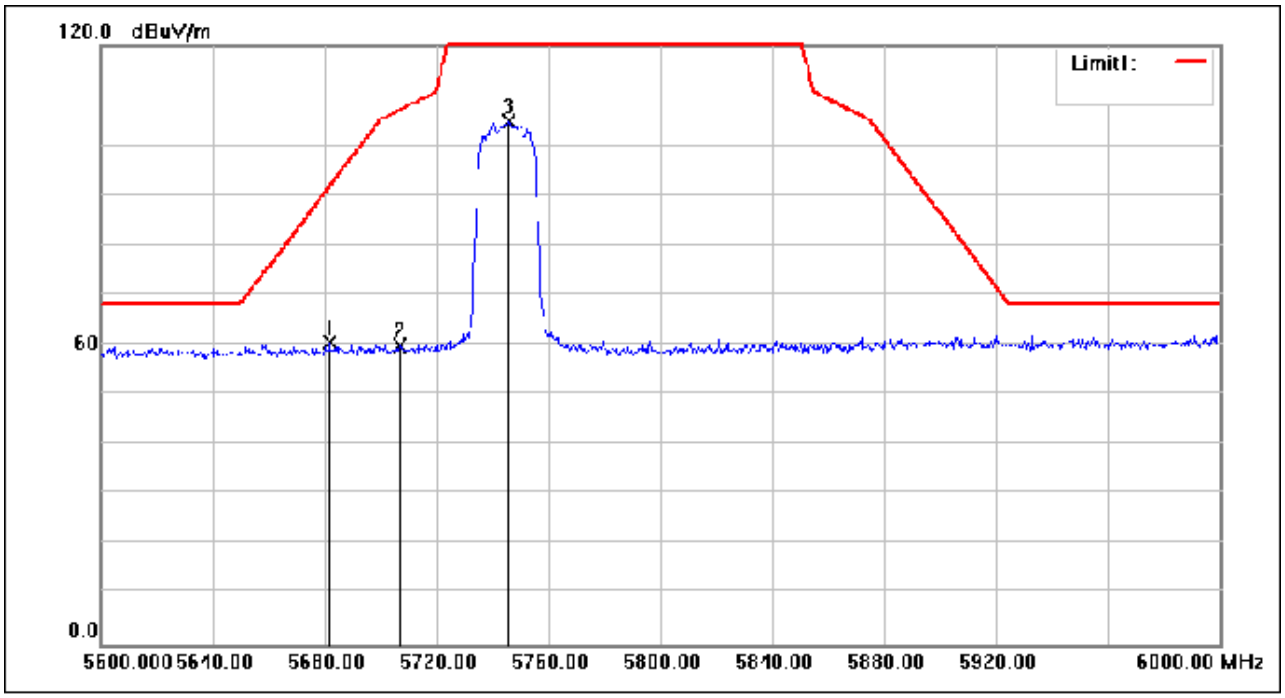


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5681.600	75.17	-14.74	60.43	91.58	-31.15	peak
2	5706.800	74.63	-14.65	59.98	107.10	-47.12	peak
3	5745.600	119.26	-14.49	104.77	135.00	-30.23	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

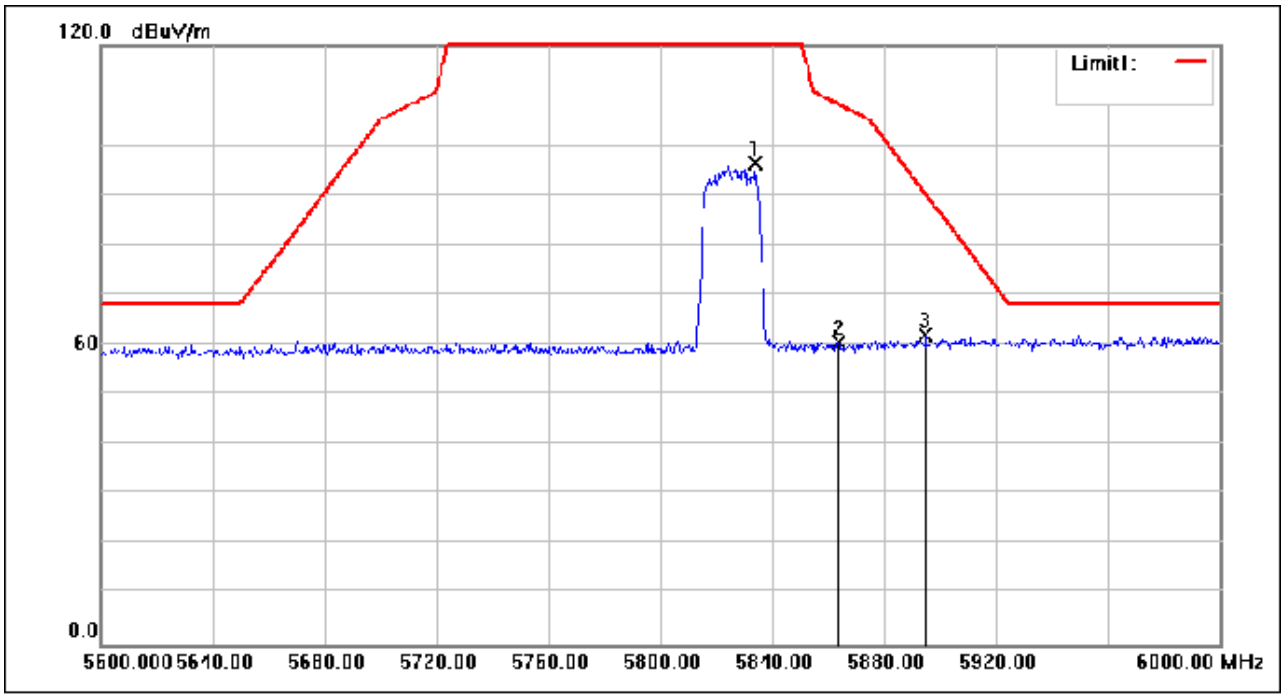


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5834.000	110.47	-14.10	96.37	135.00	-38.63	peak
2	5863.600	74.51	-13.94	60.57	108.39	-47.82	peak
3	5894.800	75.83	-13.74	62.09	90.55	-28.46	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

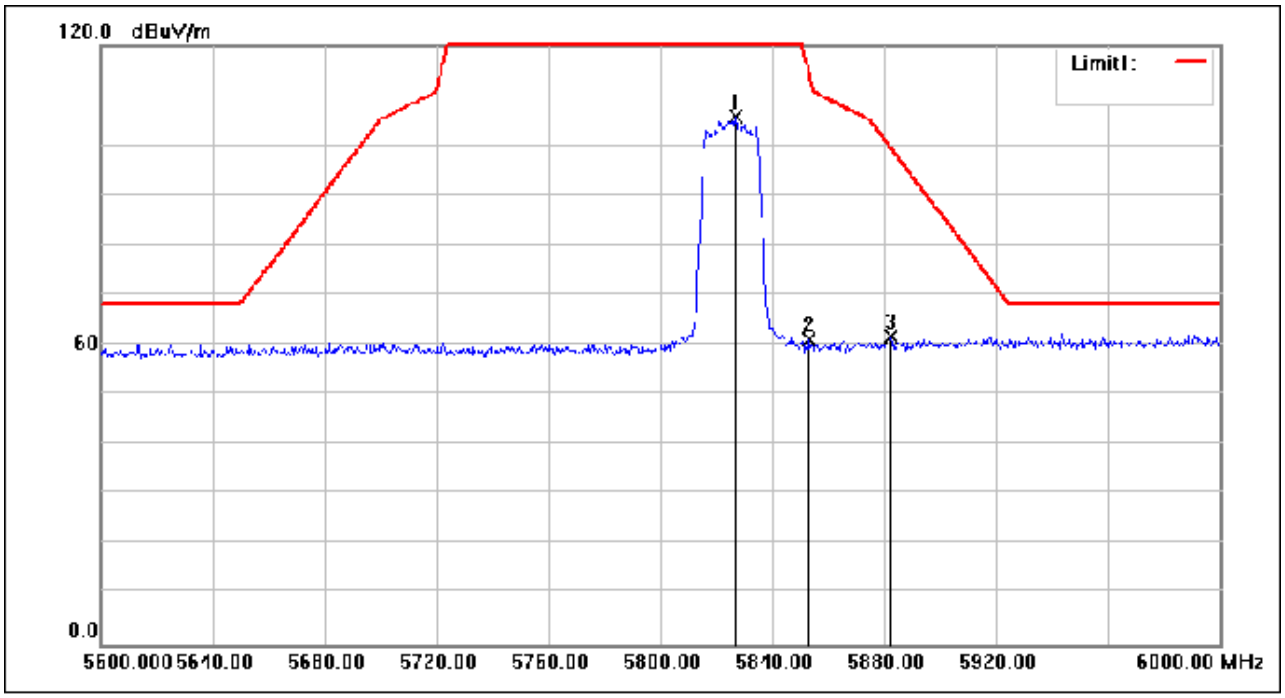


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.800	120.02	-14.13	105.89	135.00	-29.11	peak
2	5852.800	75.09	-14.01	61.08	115.82	-54.74	peak
3	5882.400	75.42	-13.82	61.60	99.72	-38.12	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

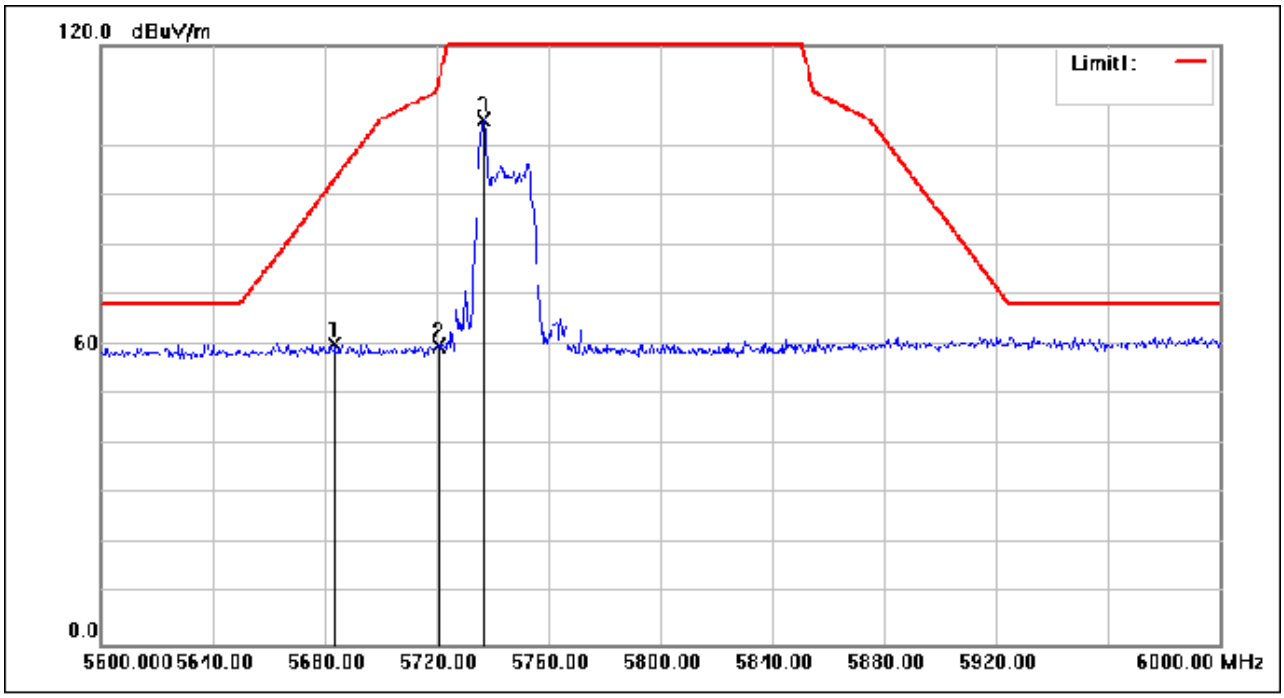


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5683.600	75.03	-14.74	60.29	93.06	-32.77	peak
2	5720.800	74.55	-14.60	59.95	112.62	-52.67	peak
3	5736.800	119.76	-14.53	105.23	135.00	-29.77	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

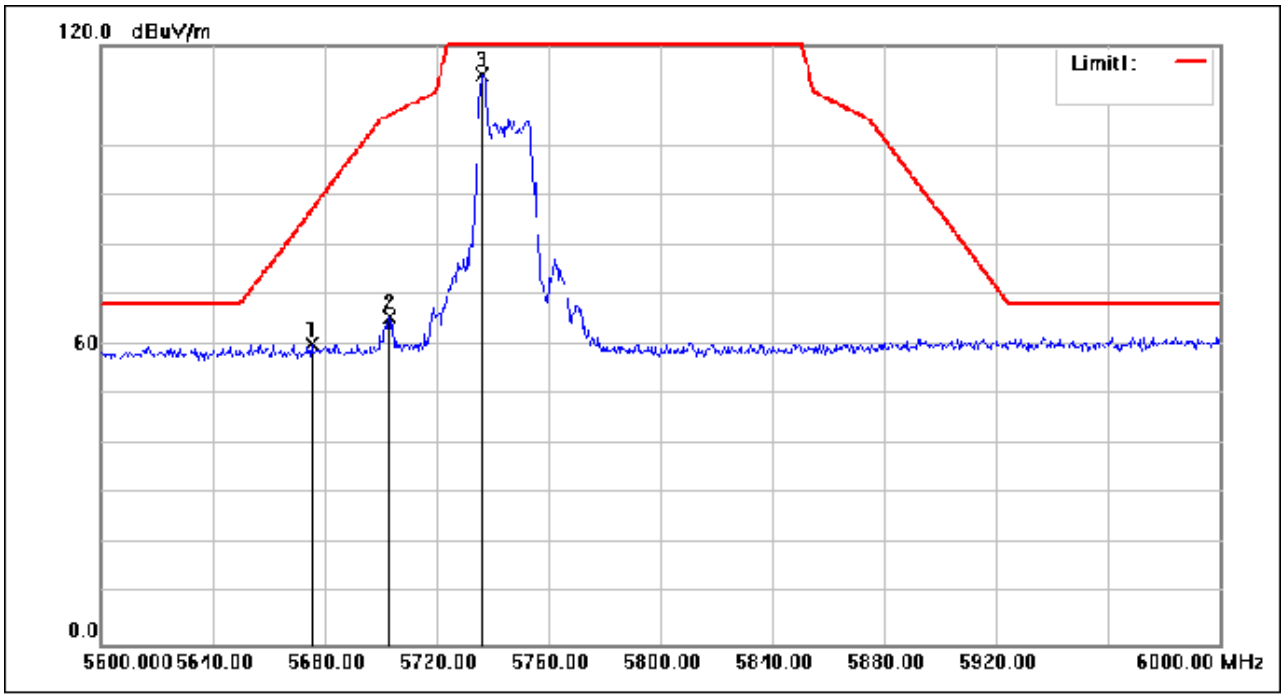


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5675.200	74.85	-14.77	60.08	86.85	-26.77	peak
2	5703.200	80.13	-14.66	65.47	106.10	-40.63	peak
3	5736.400	128.61	-14.53	114.08	135.00	-20.92	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

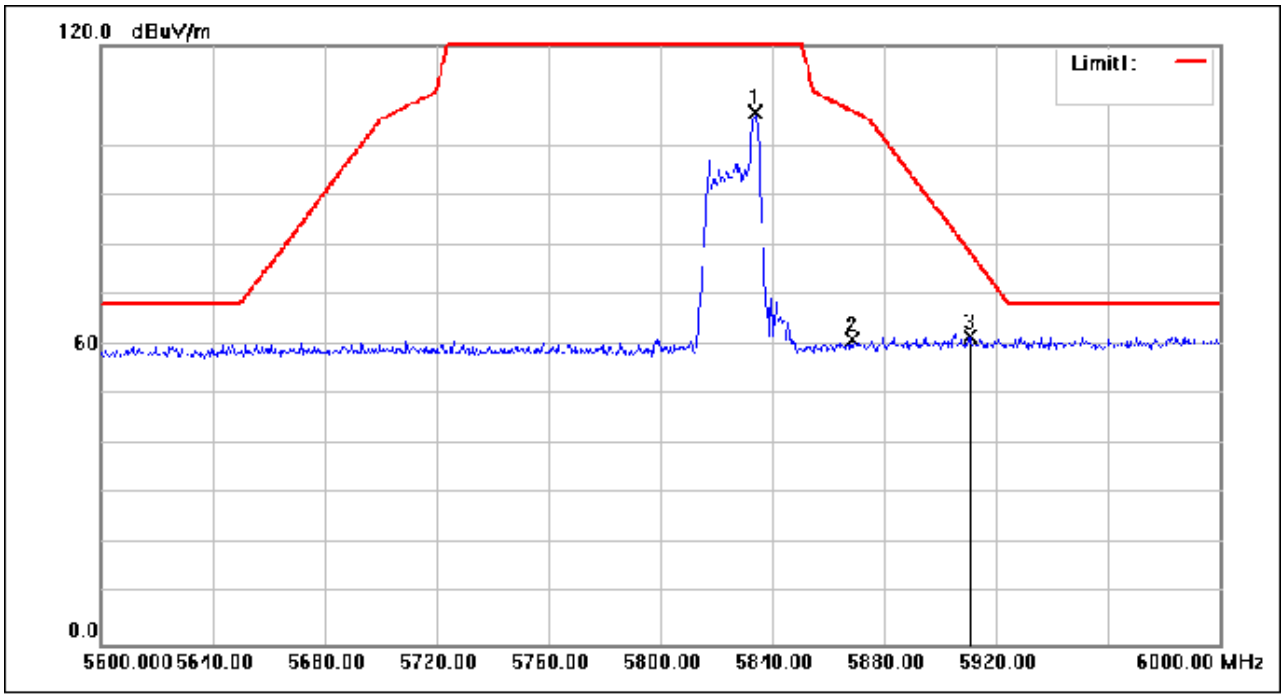


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5834.000	120.84	-14.10	106.74	135.00	-28.26	peak
2	5868.400	74.99	-13.91	61.08	107.05	-45.97	peak
3	5910.400	75.29	-13.65	61.64	79.00	-17.36	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

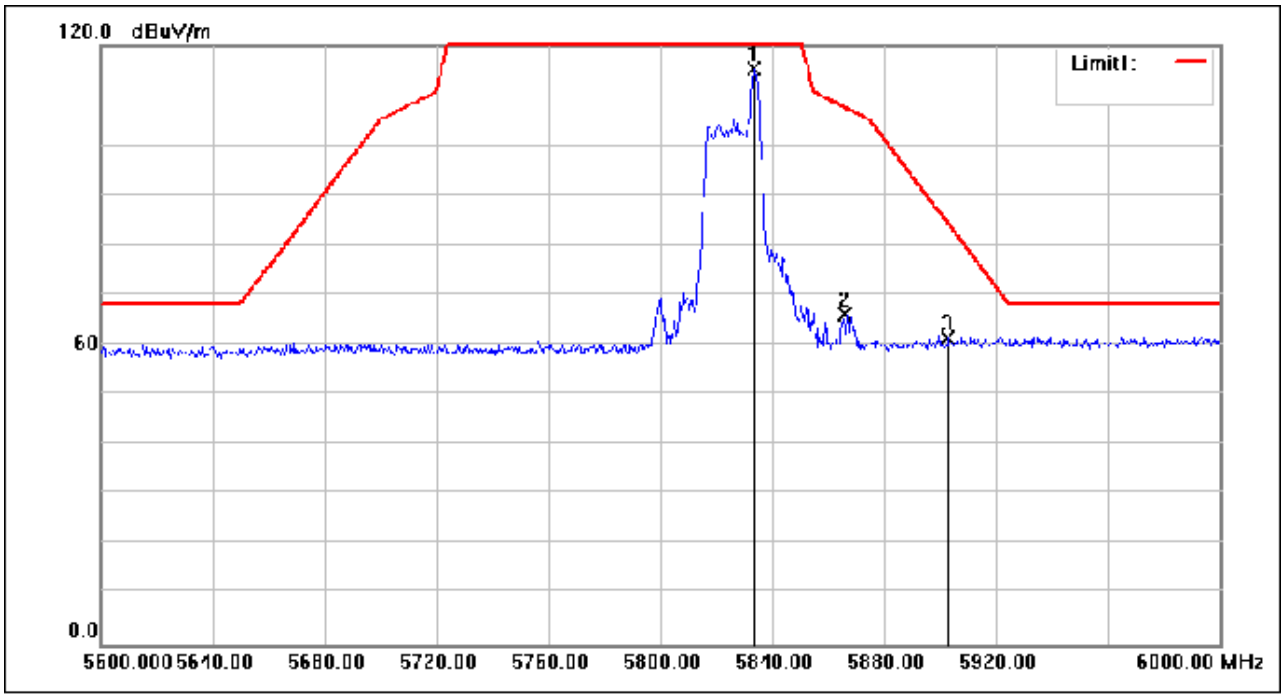


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5833.200	129.53	-14.10	115.43	135.00	-19.57	peak
2	5865.600	79.99	-13.93	66.06	107.83	-41.77	peak
3	5902.800	75.04	-13.69	61.35	84.63	-23.28	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

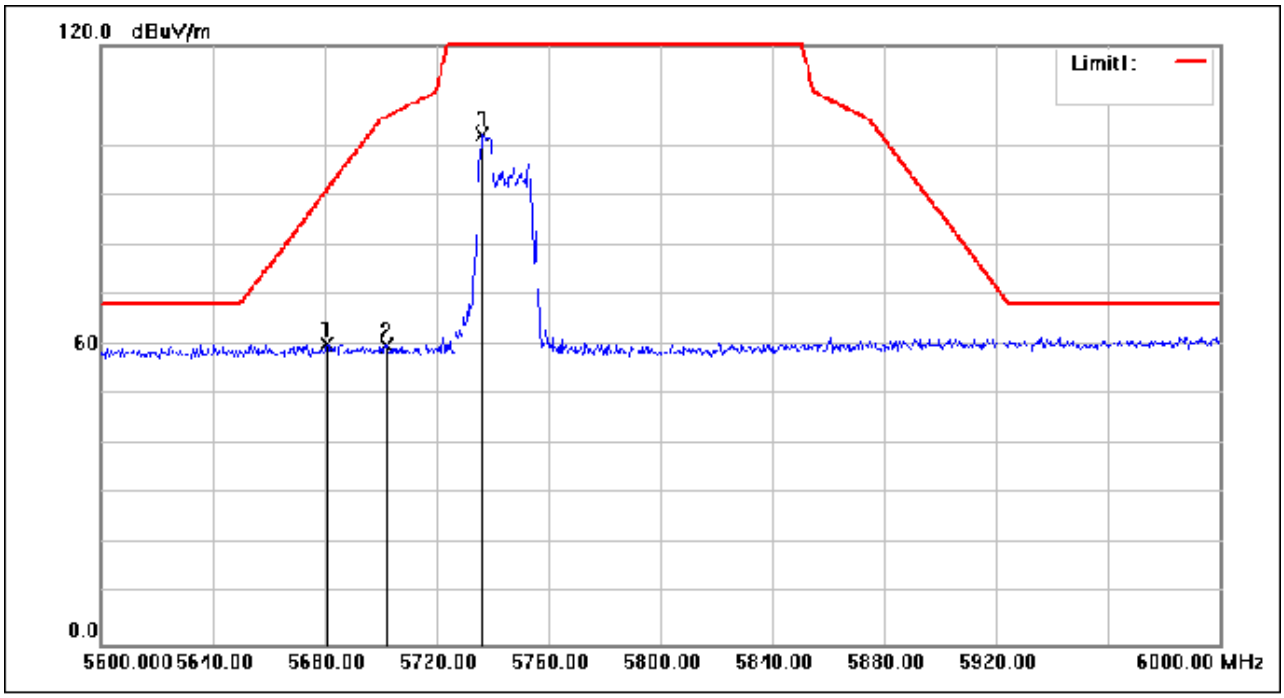


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5680.800	74.83	-14.75	60.08	90.99	-30.91	peak
2	5702.000	74.60	-14.67	59.93	105.76	-45.83	peak
3	5736.400	116.71	-14.53	102.18	135.00	-32.82	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

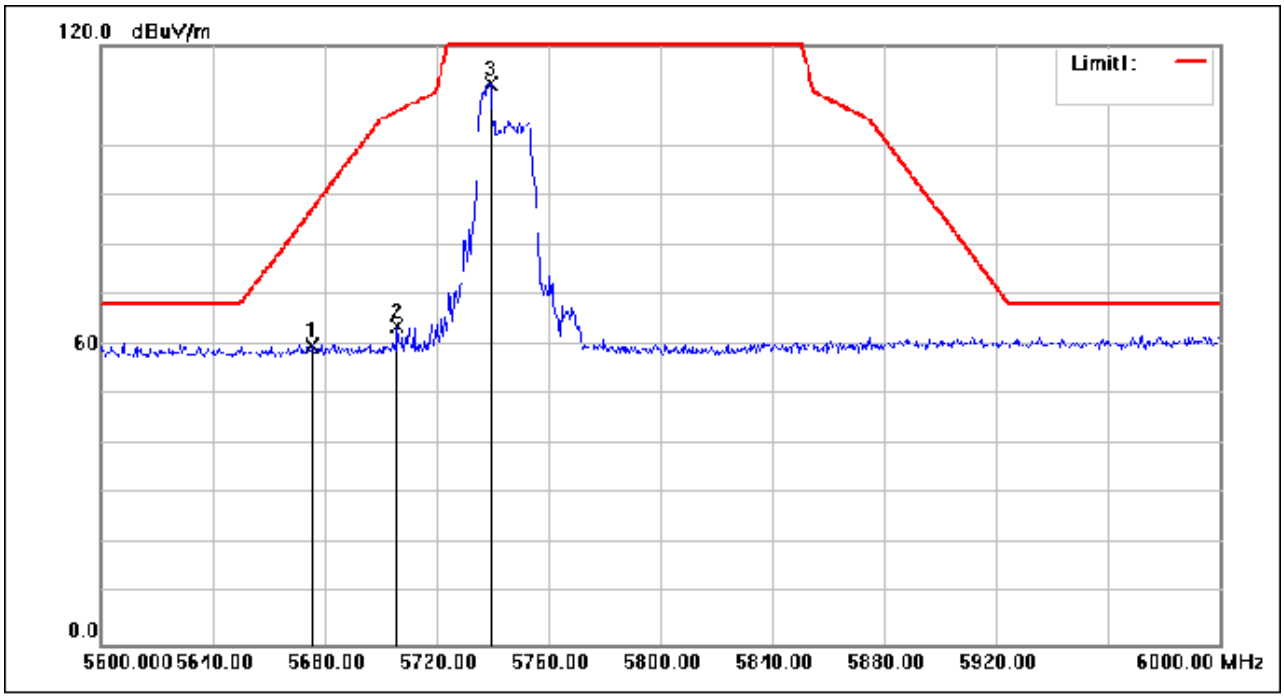


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5675.600	74.70	-14.76	59.94	87.14	-27.20	peak
2	5706.000	78.38	-14.65	63.73	106.88	-43.15	peak
3	5739.200	126.85	-14.52	112.33	135.00	-22.67	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

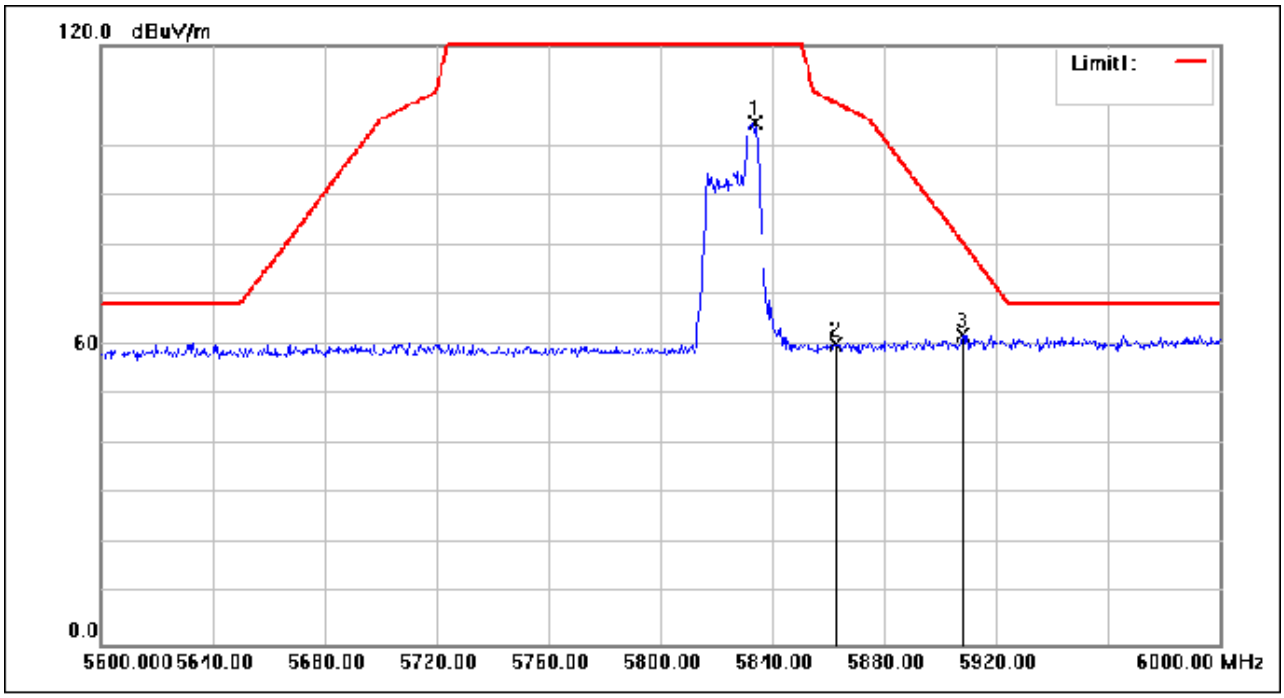


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5833.600	118.75	-14.10	104.65	135.00	-30.35	peak
2	5862.800	74.25	-13.95	60.30	108.62	-48.32	peak
3	5908.000	75.56	-13.67	61.89	80.78	-18.89	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

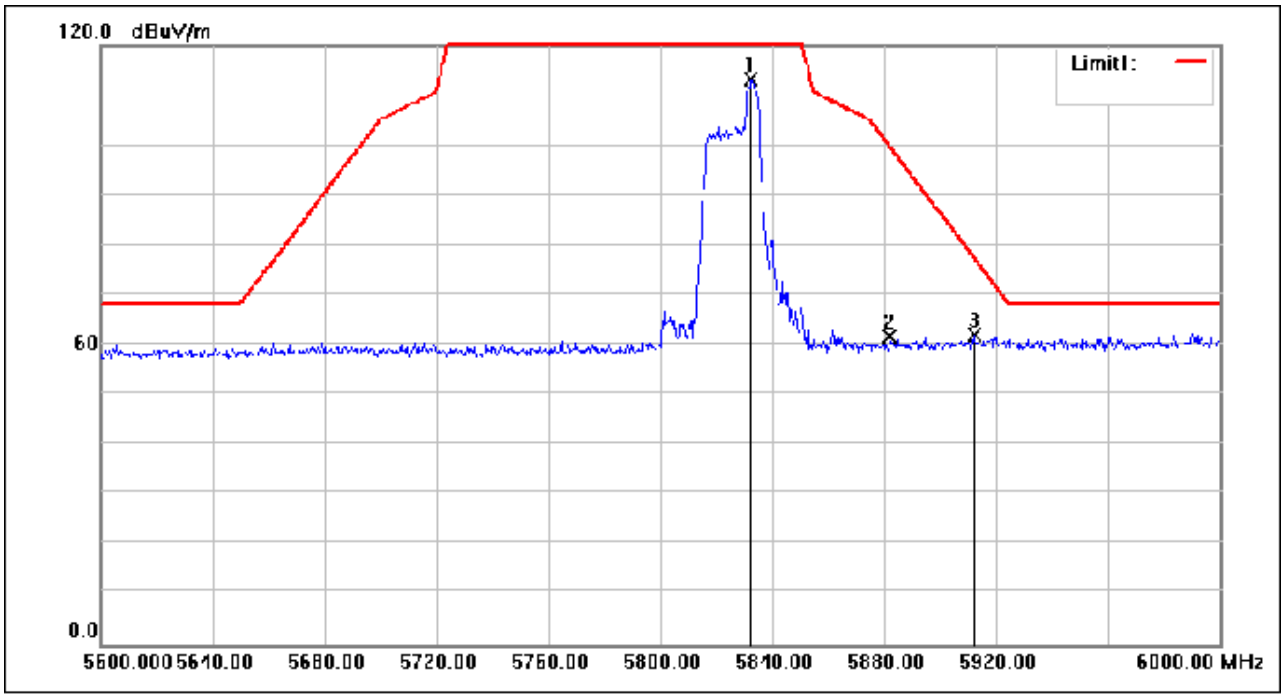


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5832.400	127.44	-14.10	113.34	135.00	-21.66	peak
2	5882.000	75.47	-13.82	61.65	100.02	-38.37	peak
3	5912.000	75.72	-13.63	62.09	77.82	-15.73	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

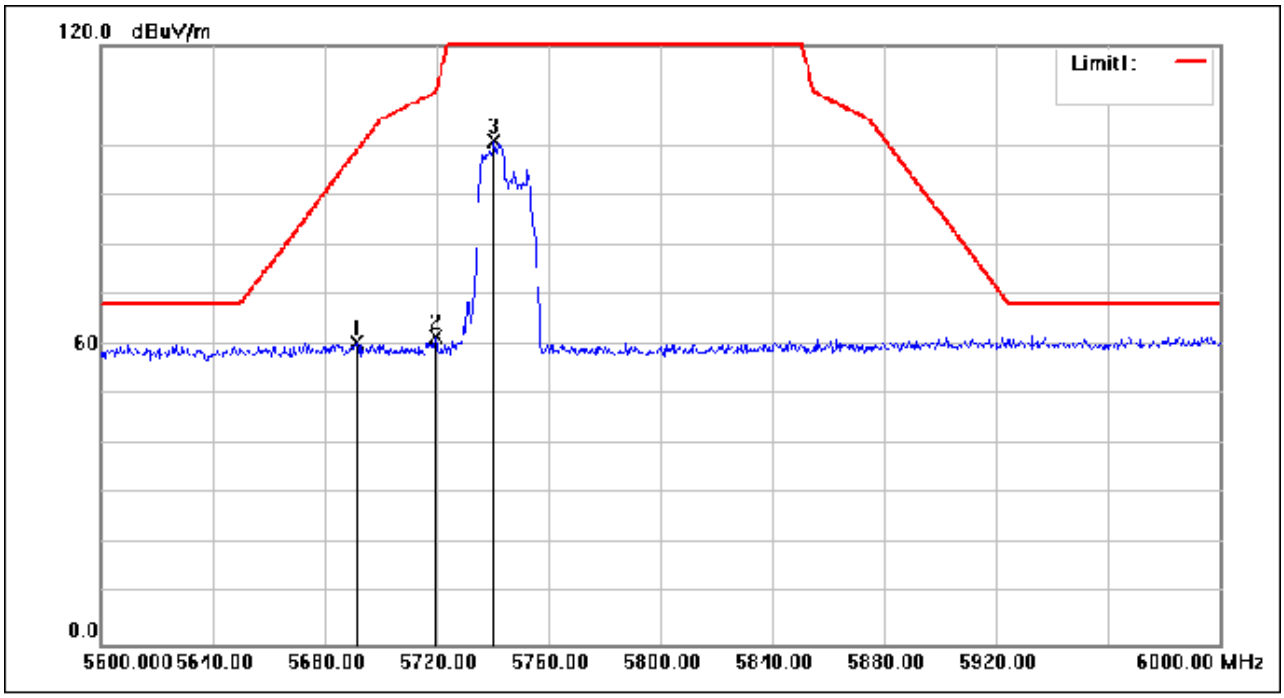


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5691.600	75.17	-14.71	60.46	98.98	-38.52	peak
2	5719.600	76.11	-14.60	61.51	110.69	-49.18	peak
3	5740.400	115.42	-14.52	100.90	135.00	-34.10	peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

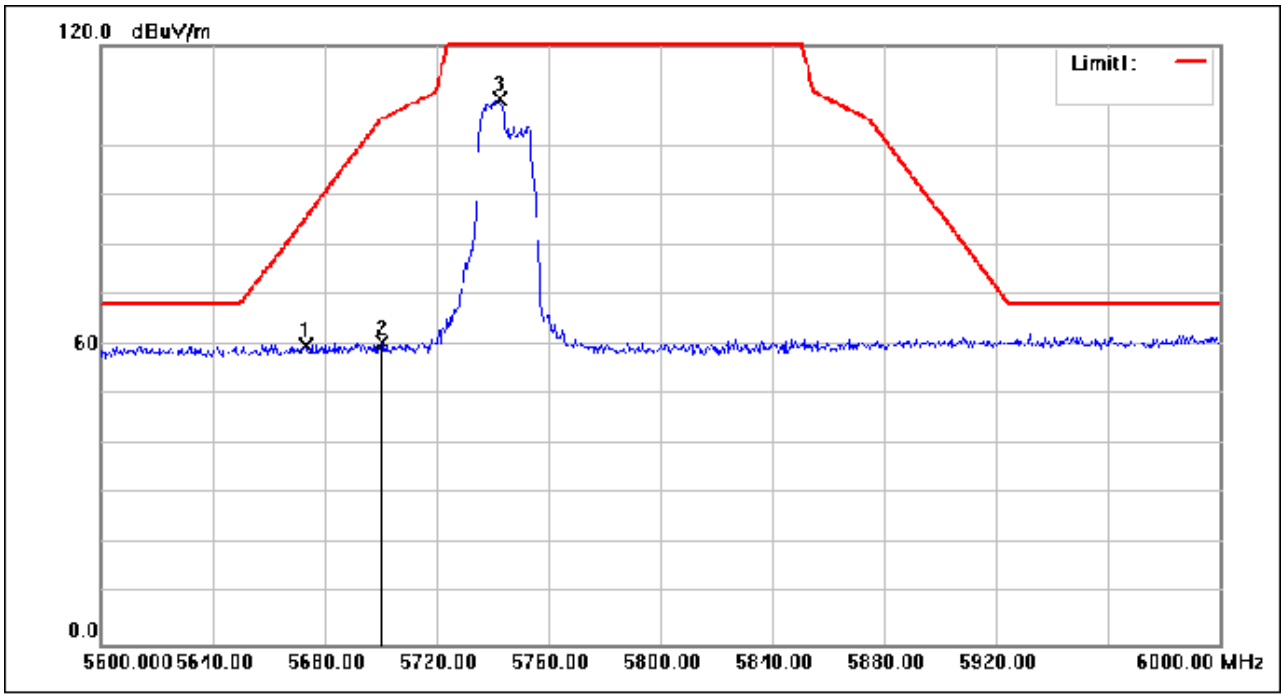


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5673.200	74.73	-14.77	59.96	85.37	-25.41	peak
2	5700.400	75.19	-14.67	60.52	105.31	-44.79	peak
3	5742.800	123.91	-14.51	109.40	135.00	-25.60	peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

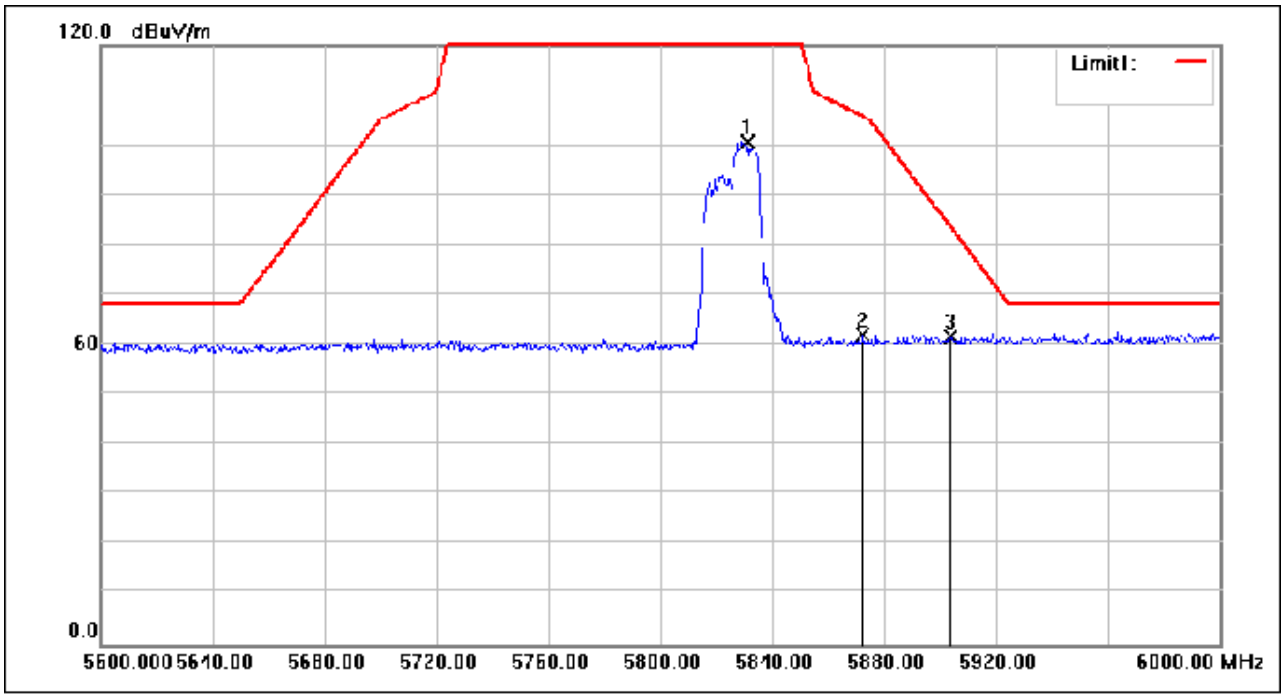

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5831.200	114.71	-14.12	100.59	135.00	-34.41	peak
2	5872.400	75.89	-13.89	62.00	105.93	-43.93	peak
3	5903.600	75.23	-13.69	61.54	84.04	-22.50	peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

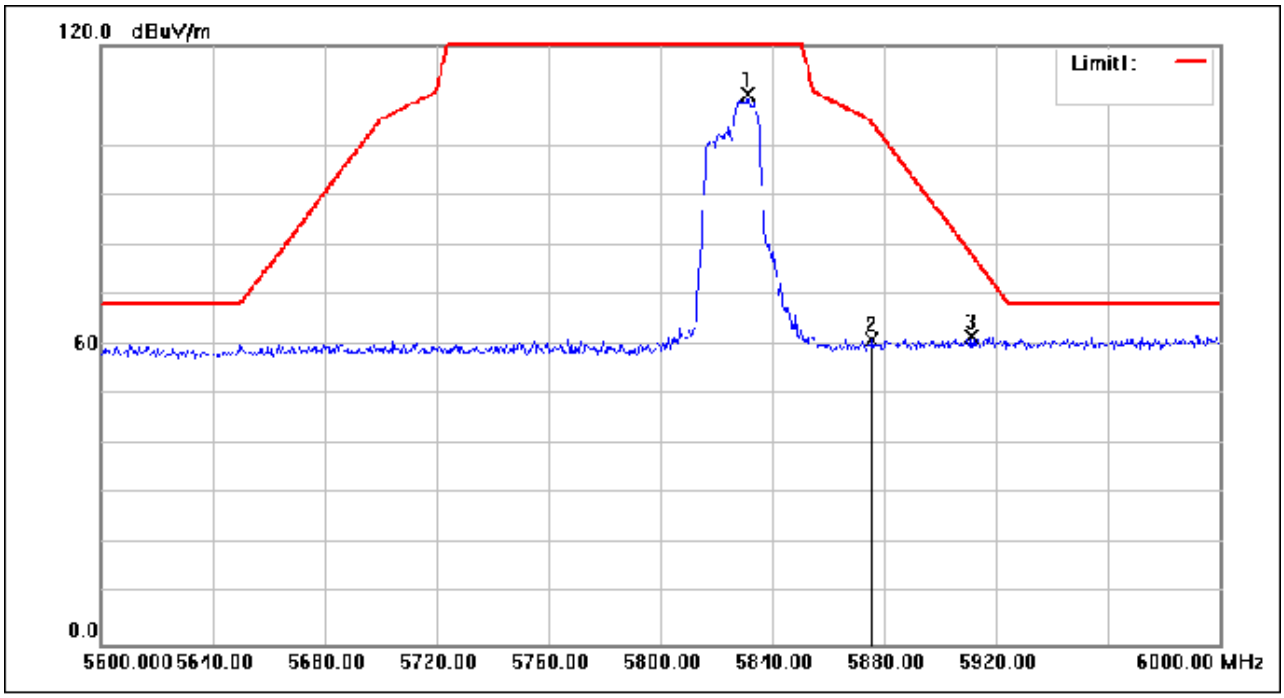

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5831.200	124.51	-14.12	110.39	135.00	-24.61	peak
2	5875.600	74.98	-13.86	61.12	104.76	-43.64	peak
3	5911.200	75.24	-13.64	61.60	78.41	-16.81	peak


PCB Antenna

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

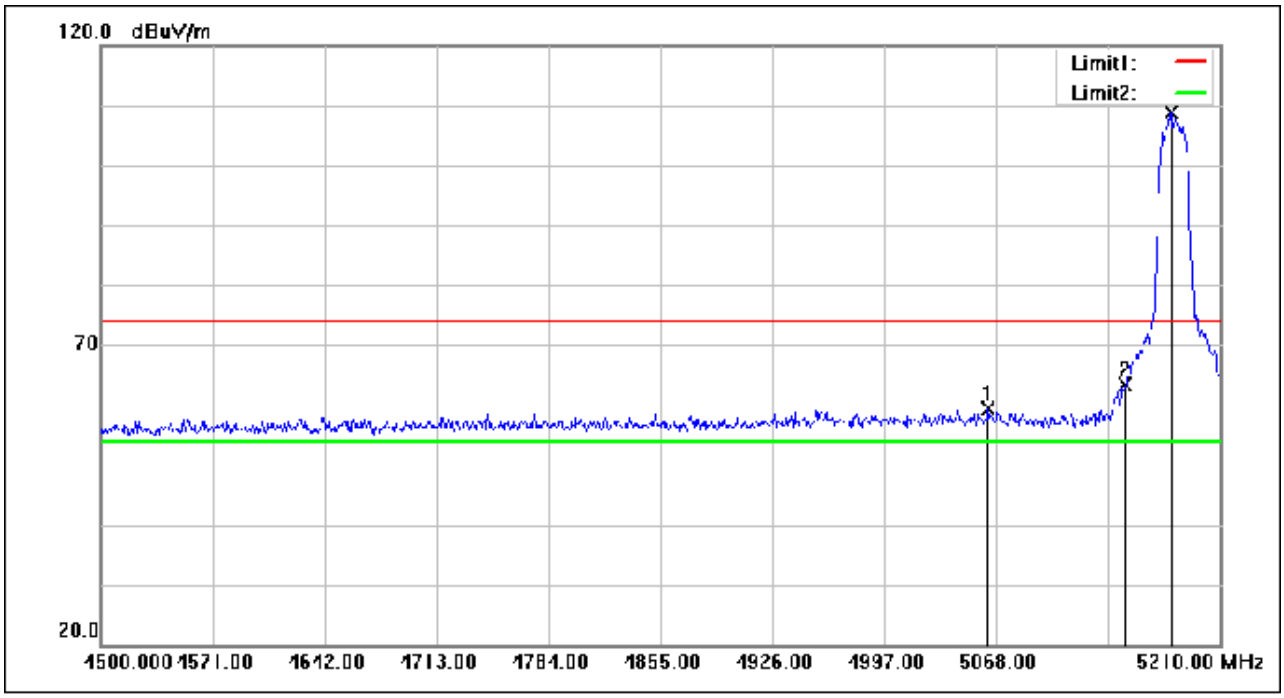


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5063.030	75.18	-15.69	59.49	74.00	-14.51	peak
2	5150.000	78.77	-15.49	63.28	74.00	-10.72	peak
3	5179.470	124.40	-15.46	108.94	74.00	34.94	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

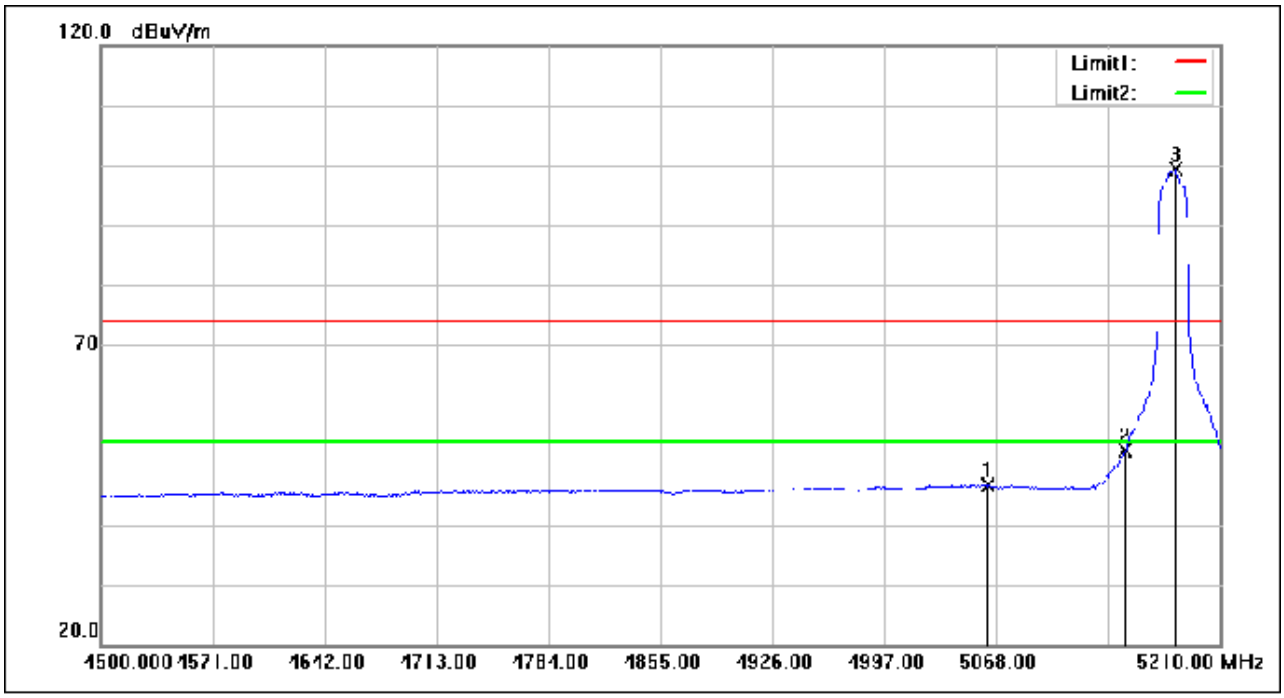


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5062.320	62.33	-15.69	46.64	54.00	-7.36	AVG
2	5150.000	67.83	-15.49	52.34	54.00	-1.66	AVG
3	5181.600	114.74	-15.46	99.28	54.00	45.28	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

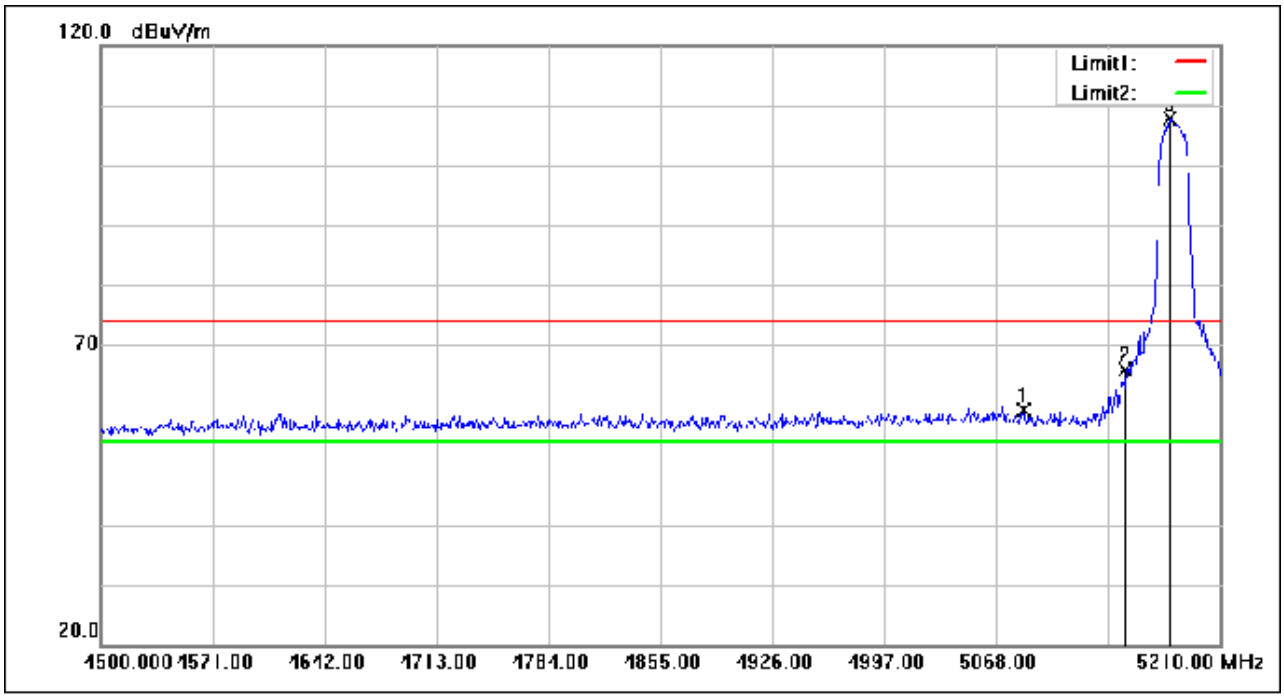


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5085.750	74.89	-15.64	59.25	74.00	-14.75	peak
2	5150.000	81.35	-15.49	65.86	74.00	-8.14	peak
3	5178.050	123.27	-15.46	107.81	74.00	33.81	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

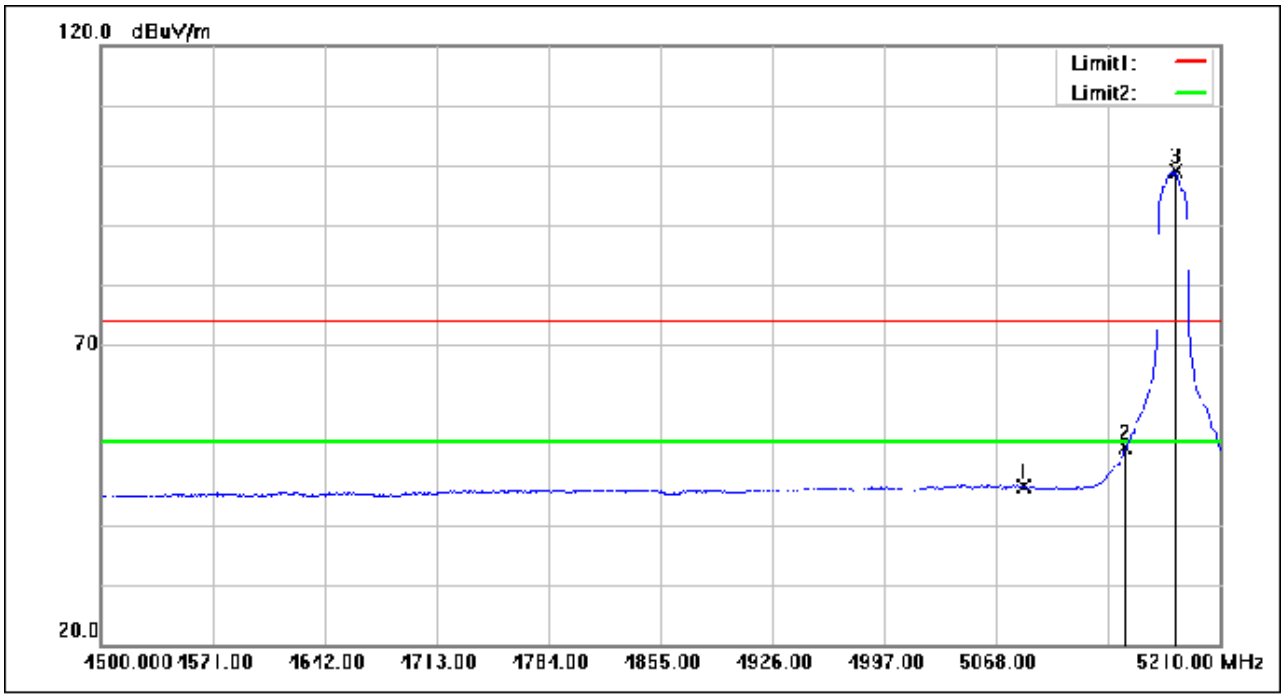


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5085.750	62.11	-15.64	46.47	54.00	-7.53	AVG
2	5150.000	68.45	-15.49	52.96	54.00	-1.04	AVG
3	5181.600	114.54	-15.46	99.08	54.00	45.08	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

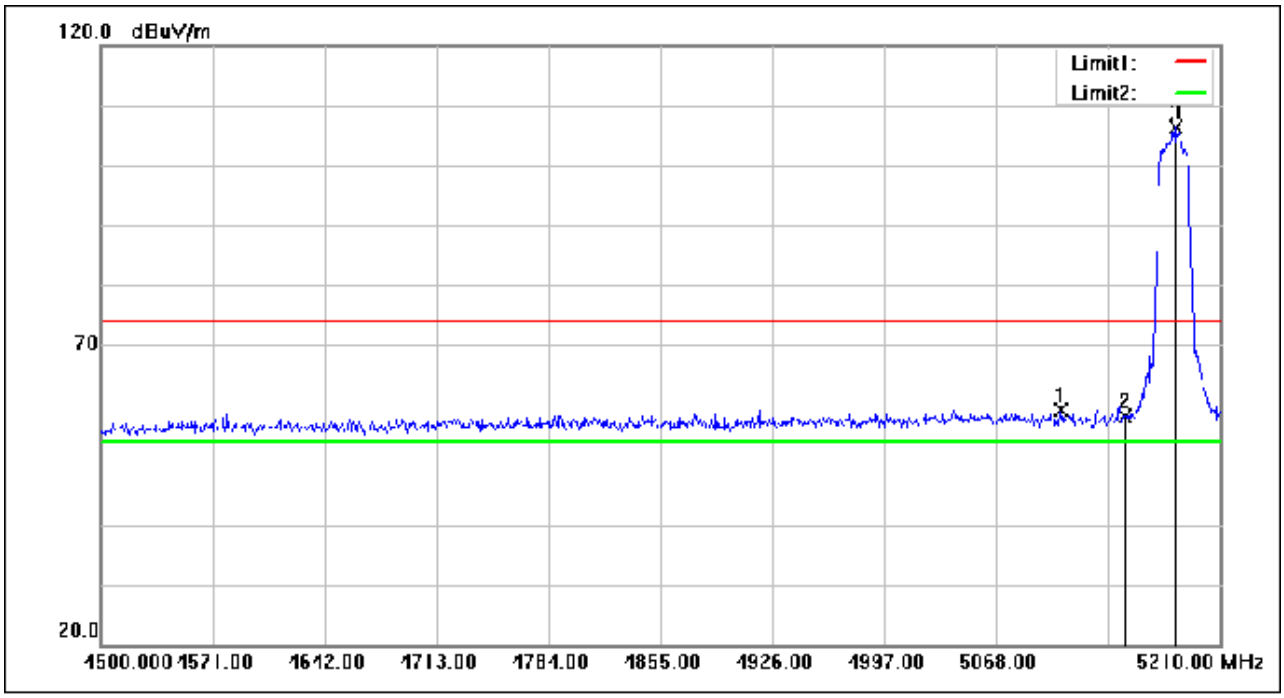


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5109.180	74.72	-15.58	59.14	74.00	-14.86	peak
2	5150.000	73.55	-15.49	58.06	74.00	-15.94	peak
3	5181.600	121.85	-15.46	106.39	74.00	32.39	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

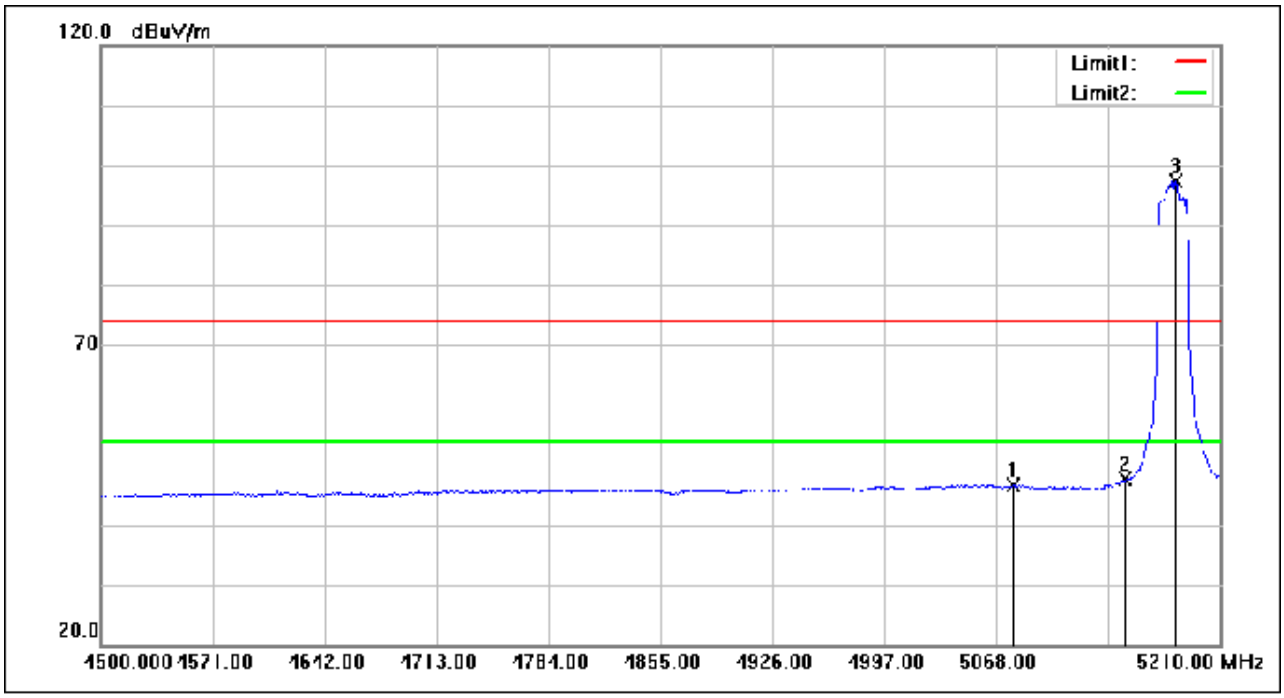


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.650	62.25	-15.66	46.59	54.00	-7.41	AVG
2	5150.000	63.16	-15.49	47.67	54.00	-6.33	AVG
3	5181.600	112.90	-15.46	97.44	54.00	43.44	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

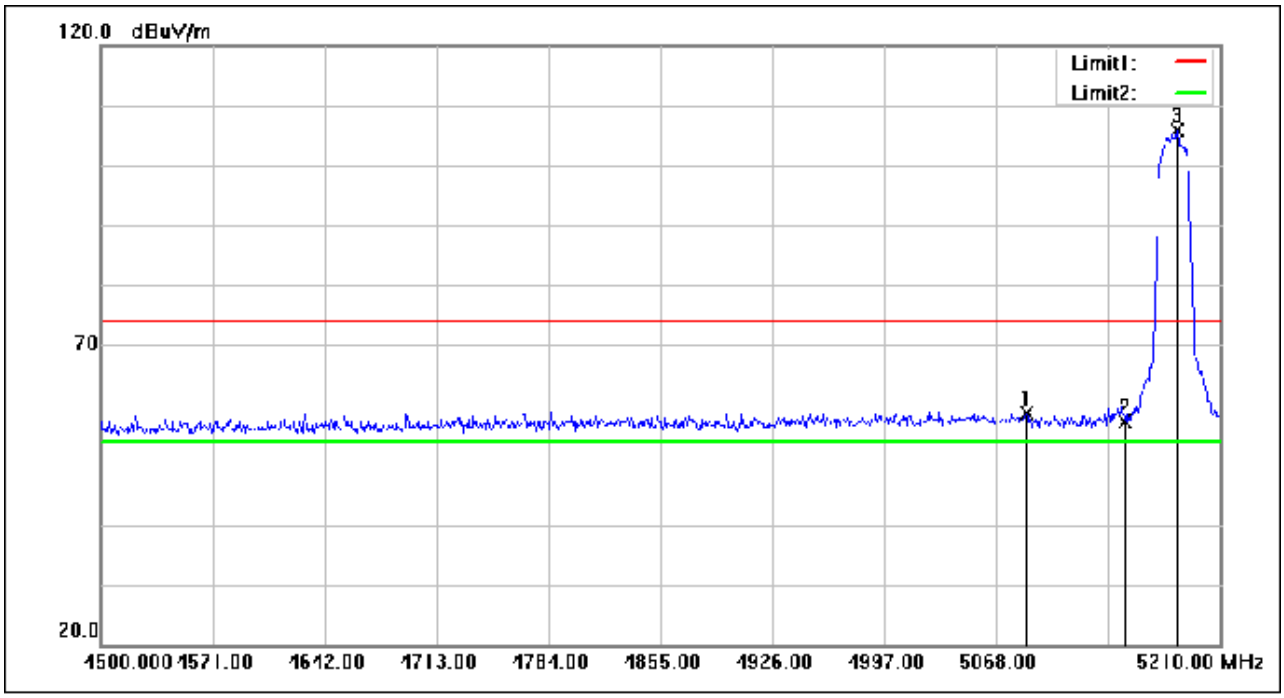


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.170	74.25	-15.63	58.62	74.00	-15.38	peak
2	5150.000	72.54	-15.49	57.05	74.00	-16.95	peak
3	5183.020	121.45	-15.45	106.00	74.00	32.00	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

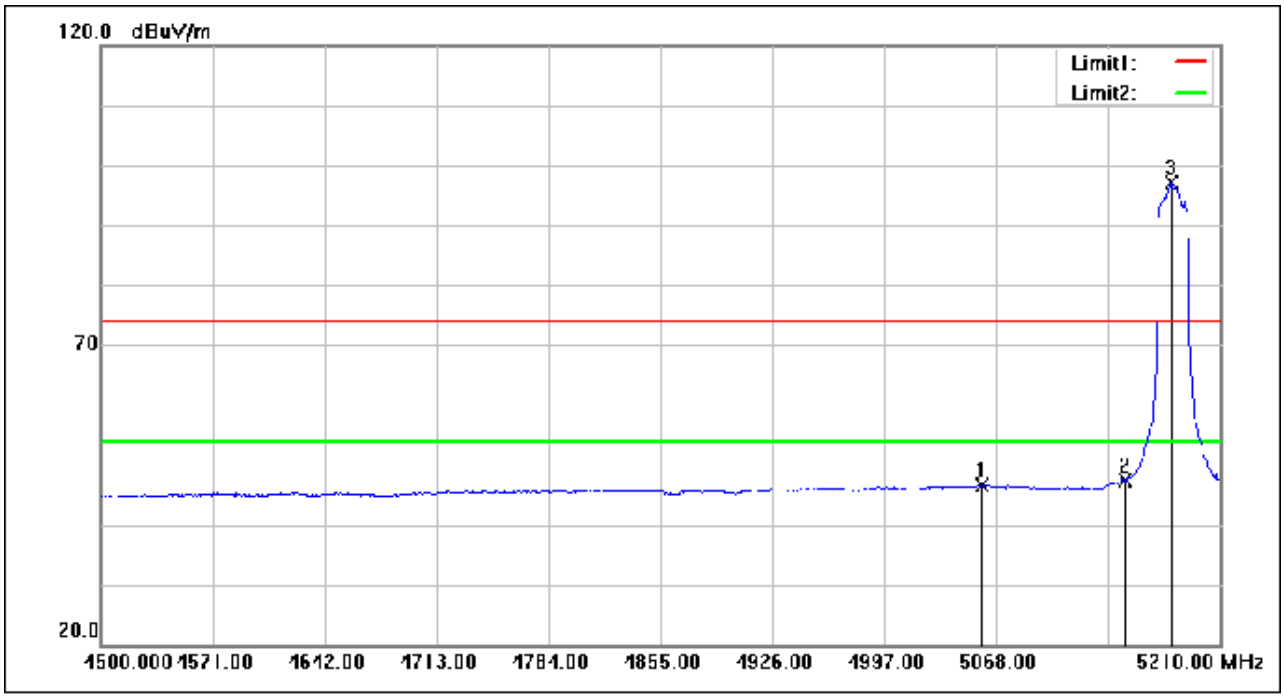


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5058.770	62.44	-15.70	46.74	54.00	-7.26	AVG
2	5150.000	62.85	-15.49	47.36	54.00	-6.64	AVG
3	5178.760	112.52	-15.46	97.06	54.00	43.06	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

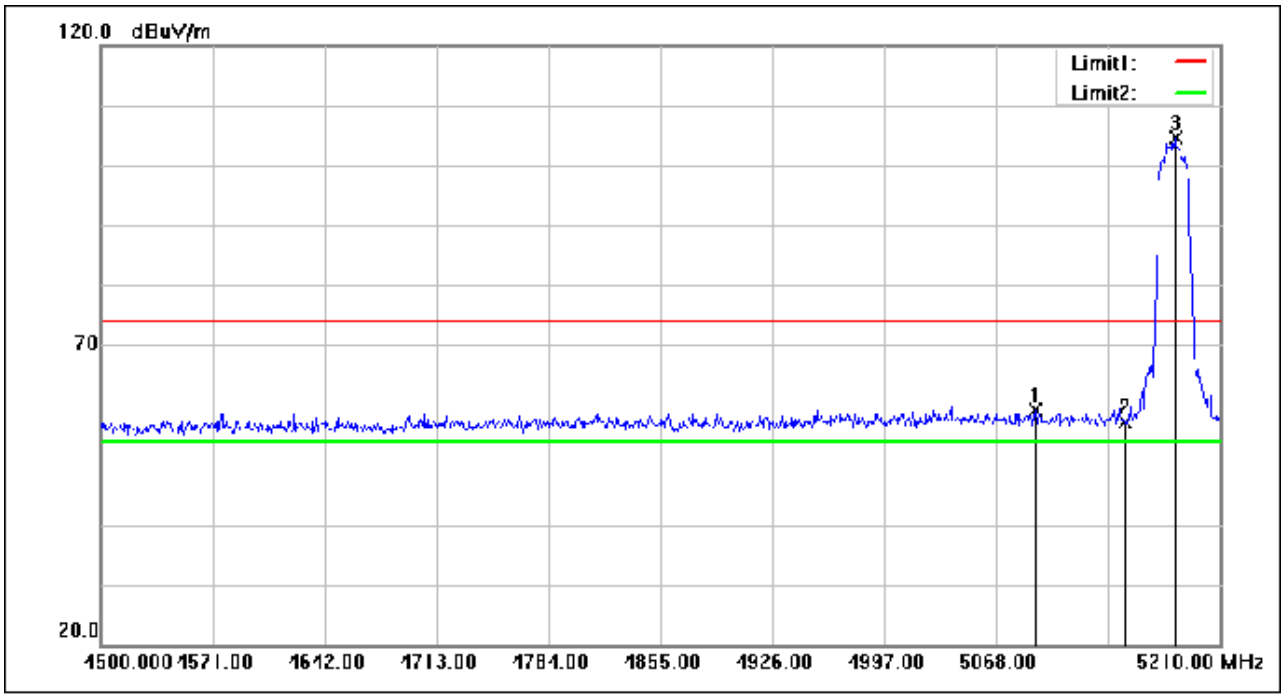


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5092.850	74.71	-15.62	59.09	74.00	-14.91	peak
2	5150.000	72.66	-15.49	57.17	74.00	-16.83	peak
3	5181.600	120.18	-15.46	104.72	74.00	30.72	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

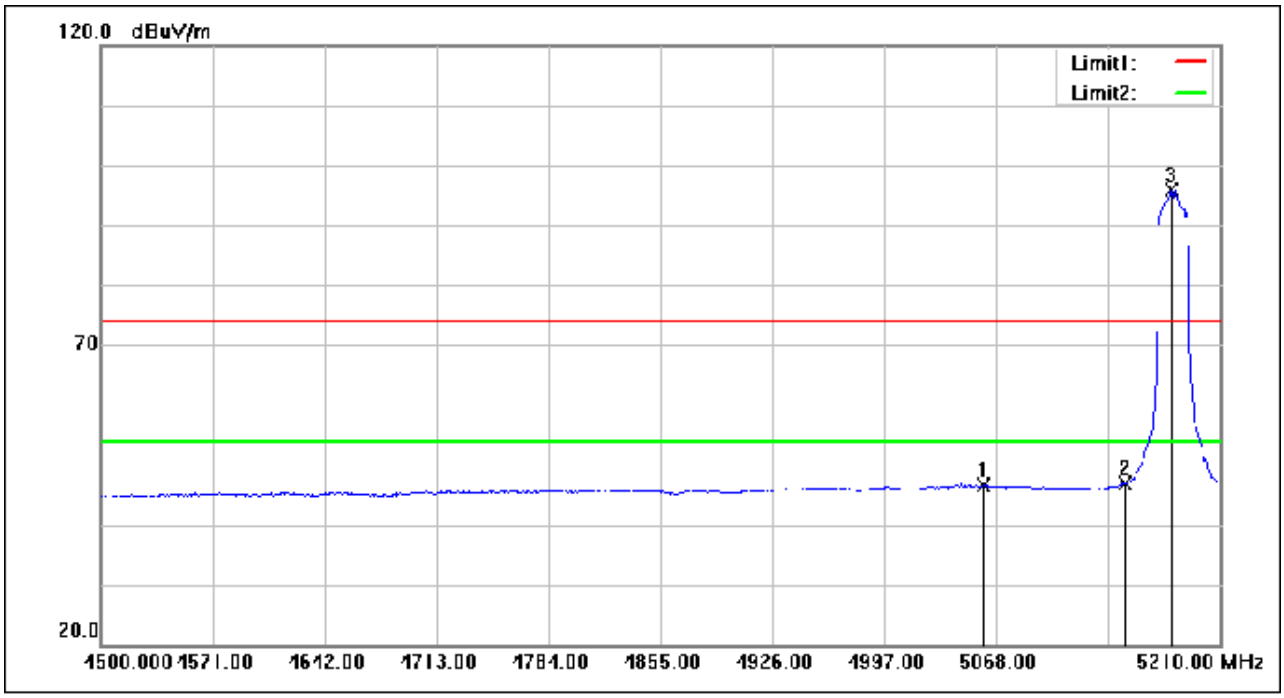


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5060.190	62.29	-15.69	46.60	54.00	-7.40	AVG
2	5150.000	62.41	-15.49	46.92	54.00	-7.08	AVG
3	5178.760	111.28	-15.46	95.82	54.00	41.82	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

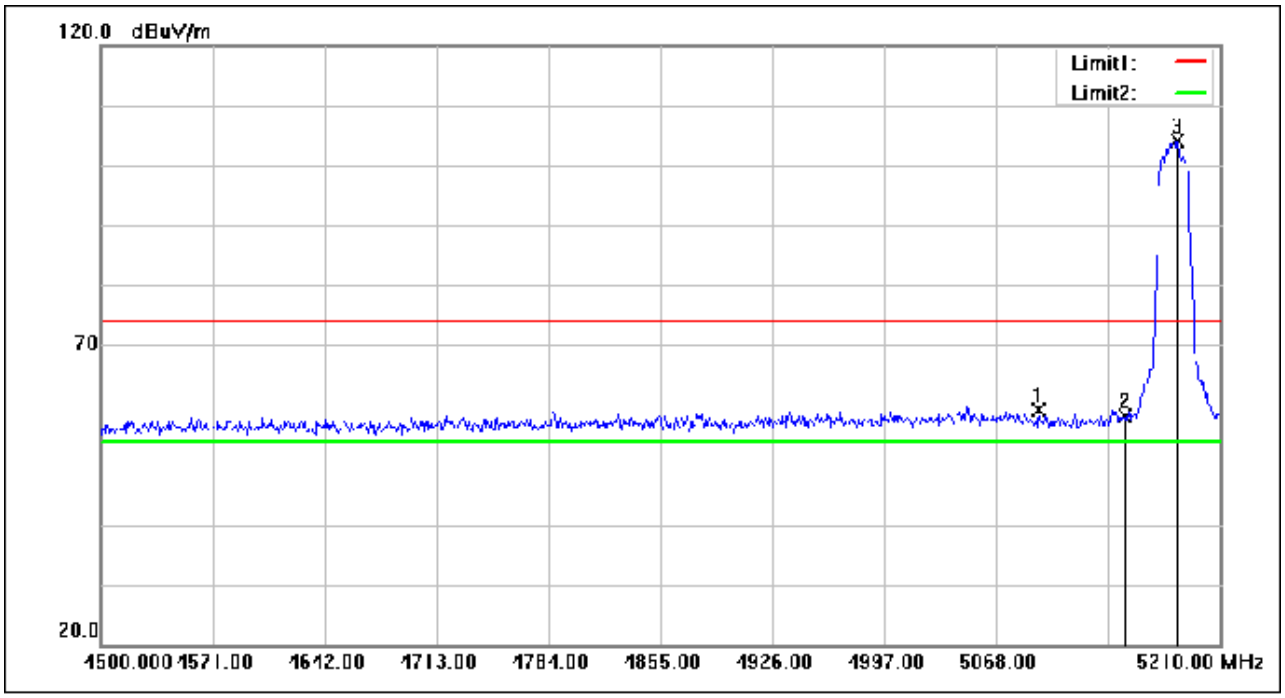


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5094.980	74.84	-15.61	59.23	74.00	-14.77	peak
2	5150.000	73.71	-15.49	58.22	74.00	-15.78	peak
3	5183.020	119.65	-15.45	104.20	74.00	30.20	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

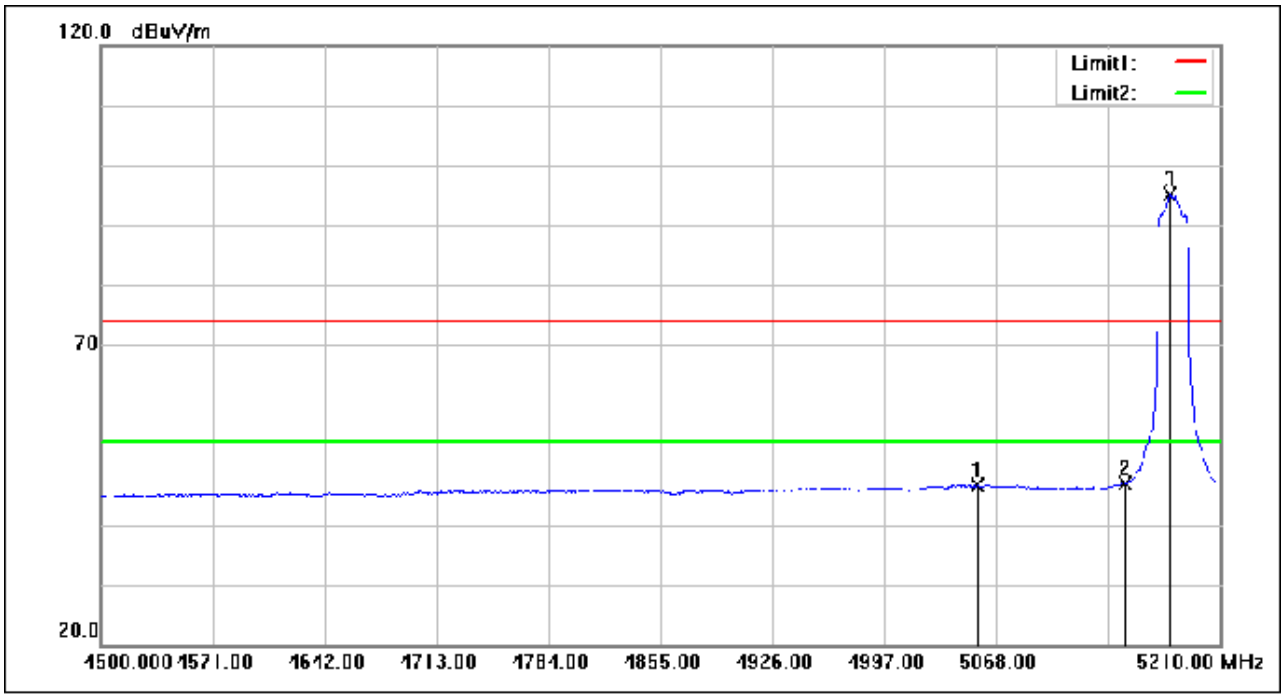


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5055.930	62.39	-15.71	46.68	54.00	-7.32	AVG
2	5150.000	62.43	-15.49	46.94	54.00	-7.06	AVG
3	5178.050	110.48	-15.46	95.02	54.00	41.02	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

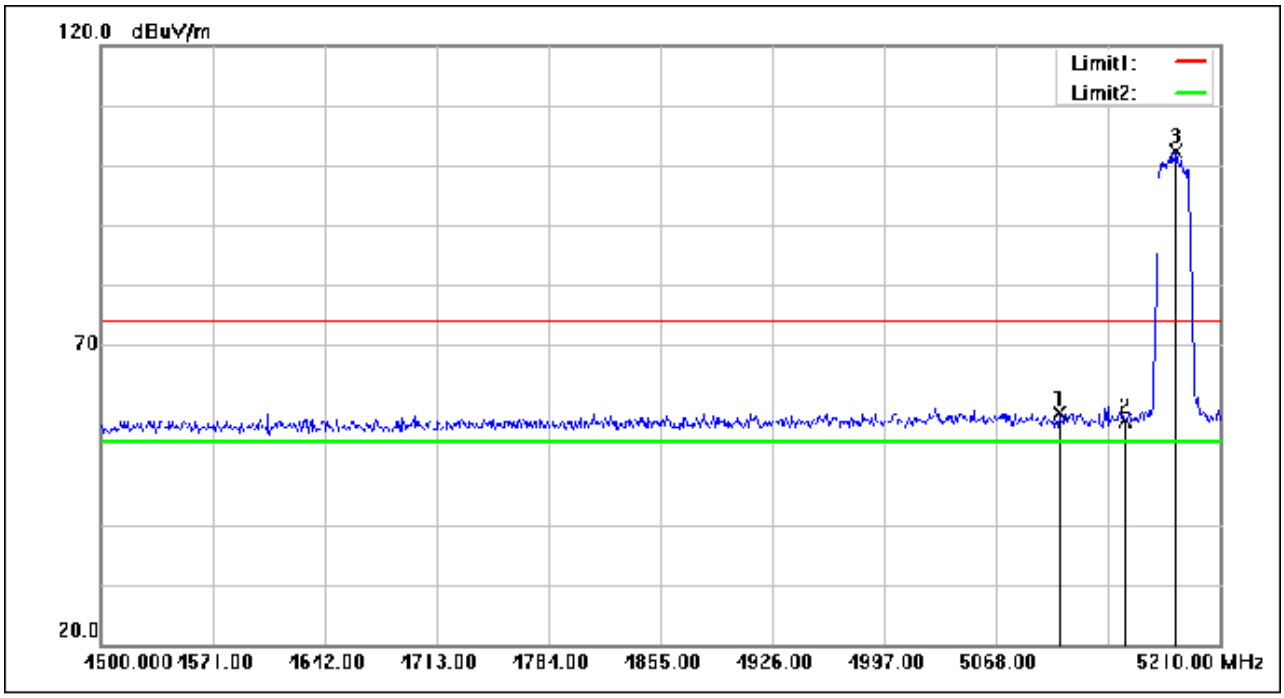


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5107.760	74.19	-15.59	58.60	74.00	-15.40	peak
2	5150.000	72.78	-15.49	57.29	74.00	-16.71	peak
3	5182.310	117.88	-15.46	102.42	74.00	28.42	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

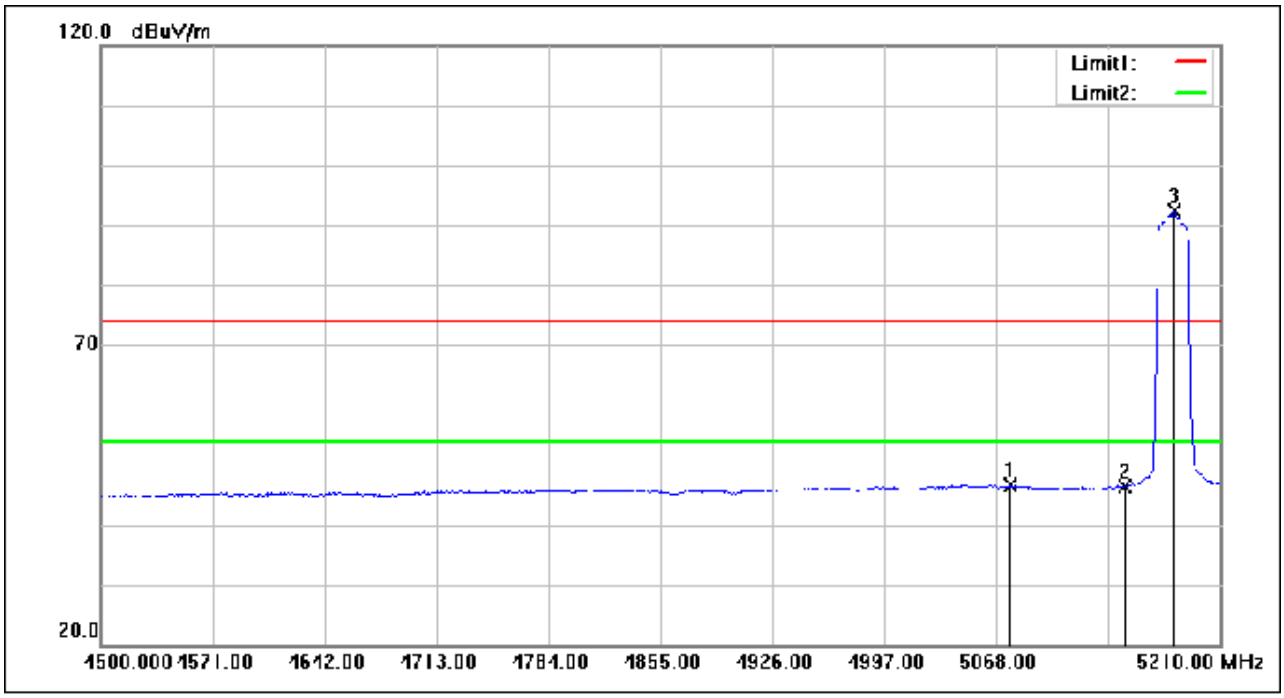


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.230	62.25	-15.66	46.59	54.00	-7.41	AVG
2	5150.000	61.95	-15.49	46.46	54.00	-7.54	AVG
3	5180.890	107.79	-15.46	92.33	54.00	38.33	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

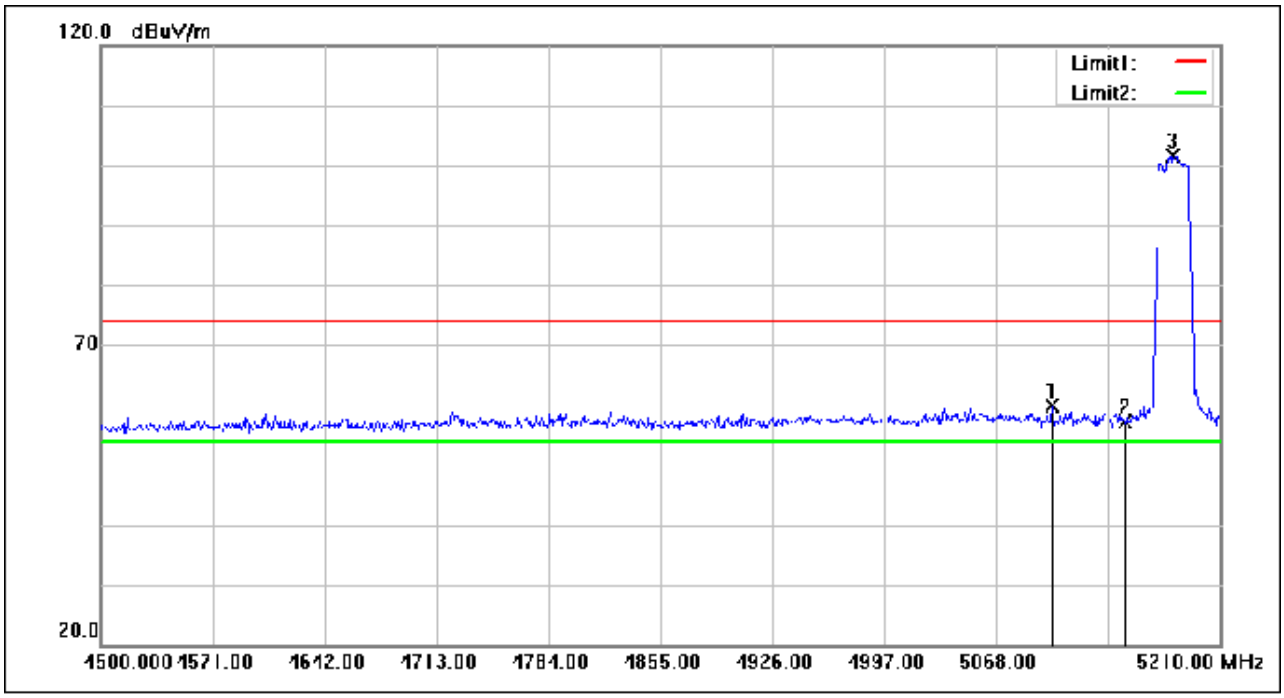


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5103.500	75.46	-15.59	59.87	74.00	-14.13	peak
2	5150.000	72.60	-15.49	57.11	74.00	-16.89	peak
3	5180.180	117.15	-15.46	101.69	74.00	27.69	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

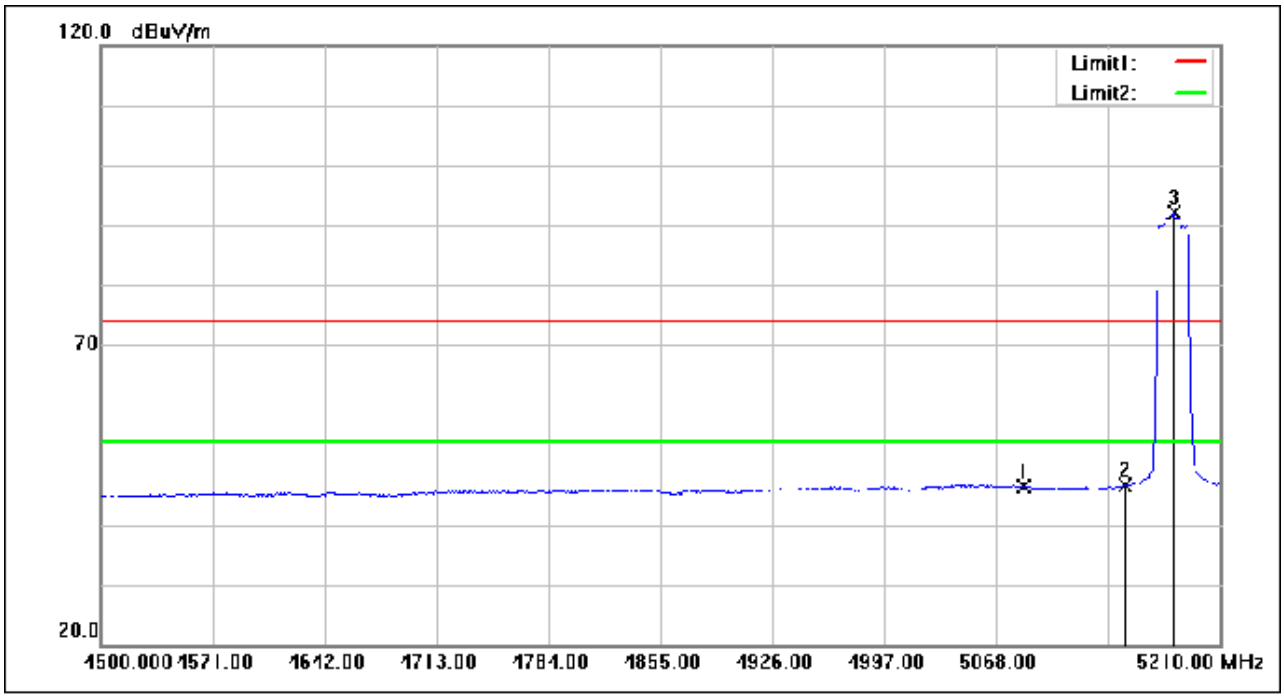


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5085.040	62.11	-15.64	46.47	54.00	-7.53	AVG
2	5150.000	62.15	-15.49	46.66	54.00	-7.34	AVG
3	5180.890	107.53	-15.46	92.07	54.00	38.07	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

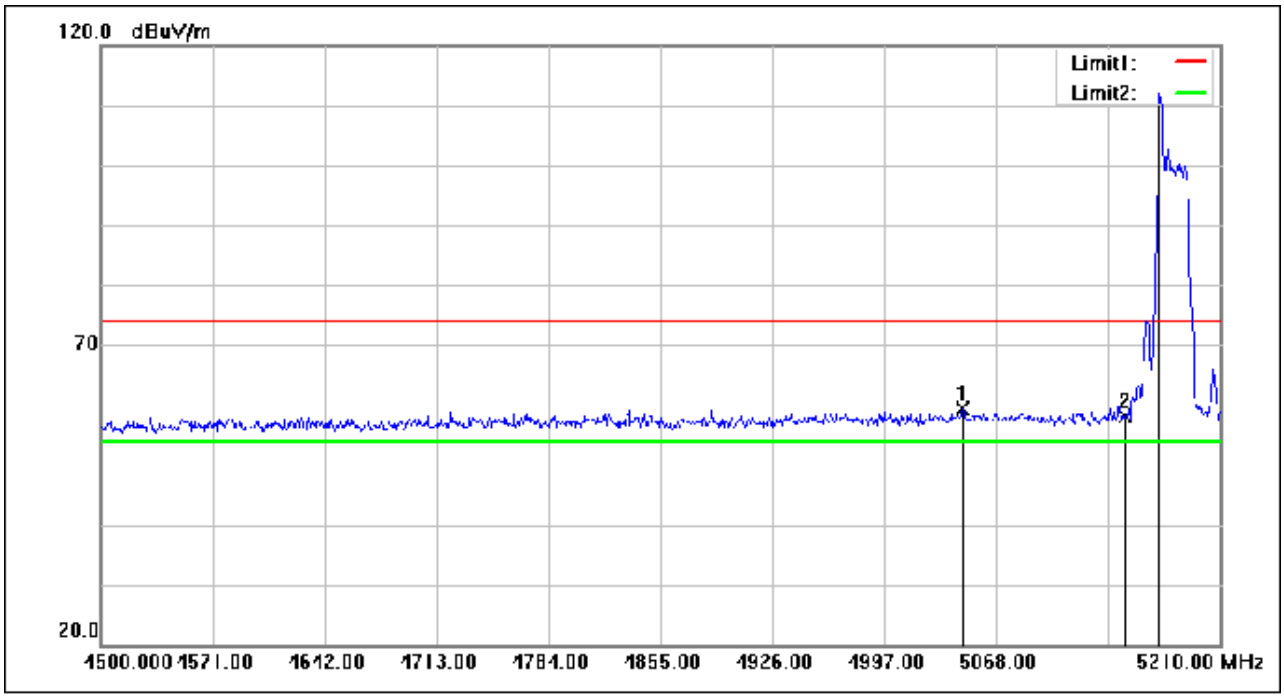


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5046.700	75.14	-15.73	59.41	74.00	-14.59	peak
2	5150.000	73.65	-15.49	58.16	74.00	-15.84	peak
3	5171.660	127.54	-15.47	112.07	74.00	38.07	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

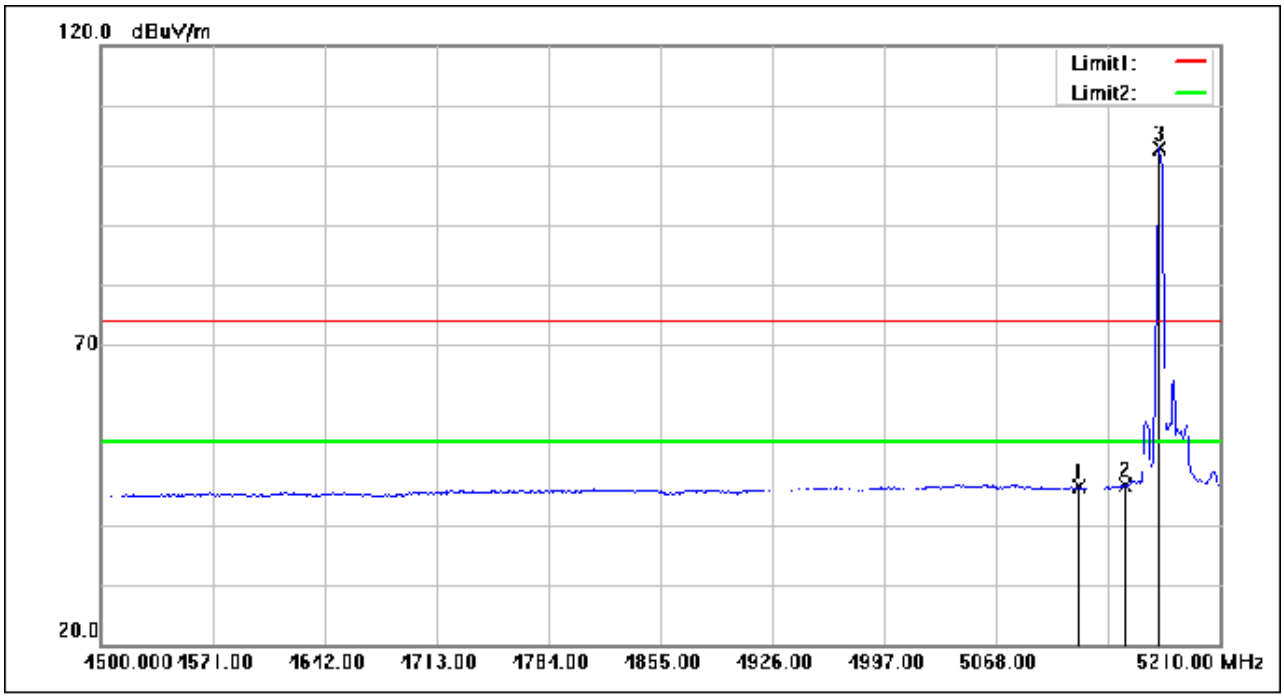


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.540	61.93	-15.56	46.37	54.00	-7.63	AVG
2	5150.000	62.02	-15.49	46.53	54.00	-7.47	AVG
3	5171.660	118.47	-15.47	103.00	54.00	49.00	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

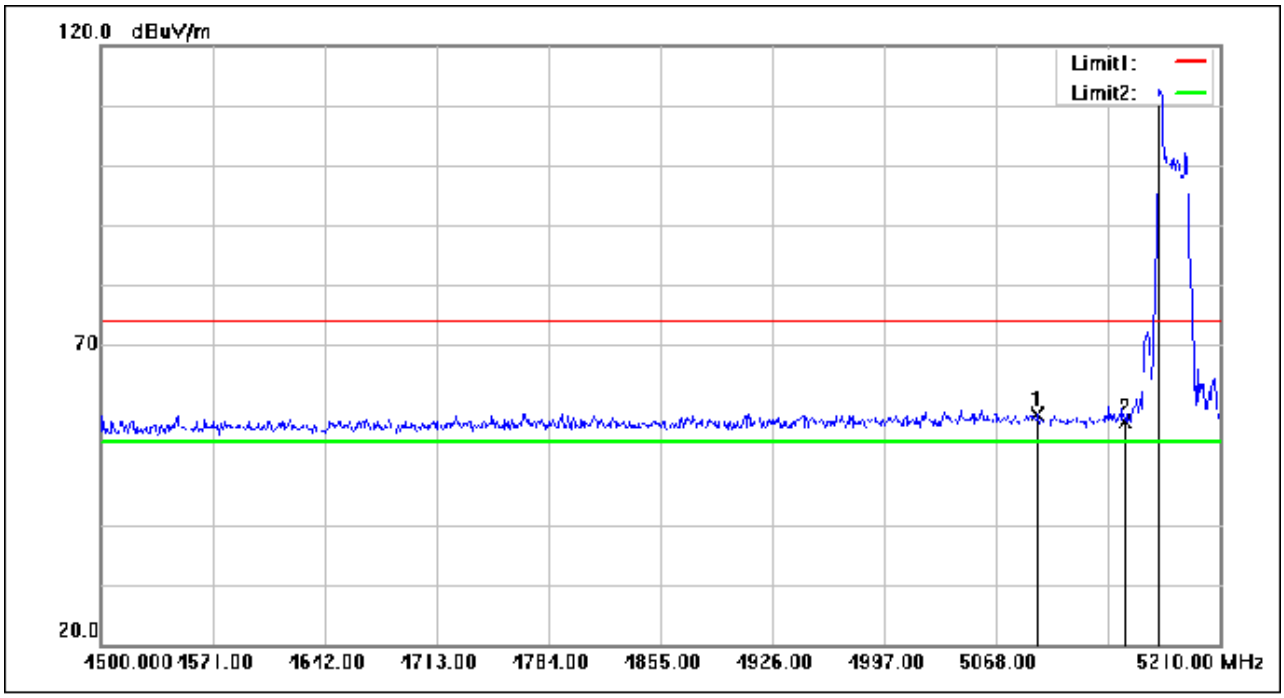


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5094.270	74.07	-15.61	58.46	74.00	-15.54	peak
2	5150.000	72.74	-15.49	57.25	74.00	-16.75	peak
3	5171.660	128.18	-15.47	112.71	74.00	38.71	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

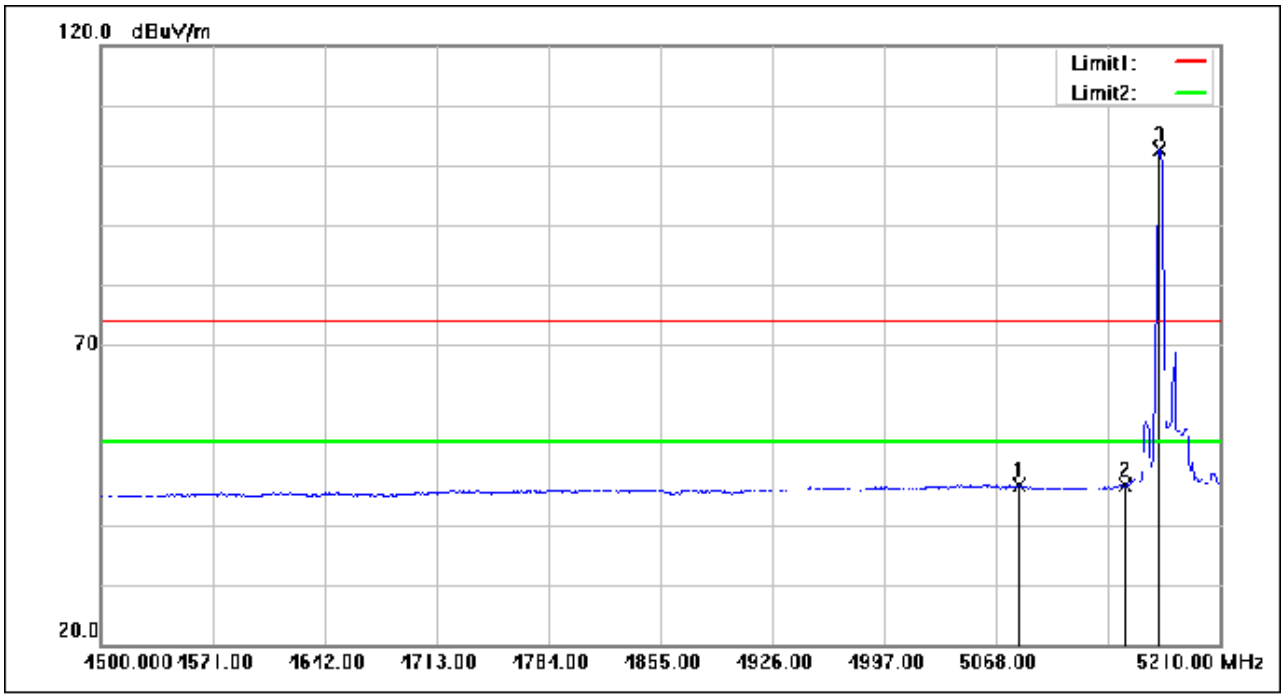


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5082.200	62.28	-15.64	46.64	54.00	-7.36	AVG
2	5150.000	62.14	-15.49	46.65	54.00	-7.35	AVG
3	5171.660	118.14	-15.47	102.67	54.00	48.67	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

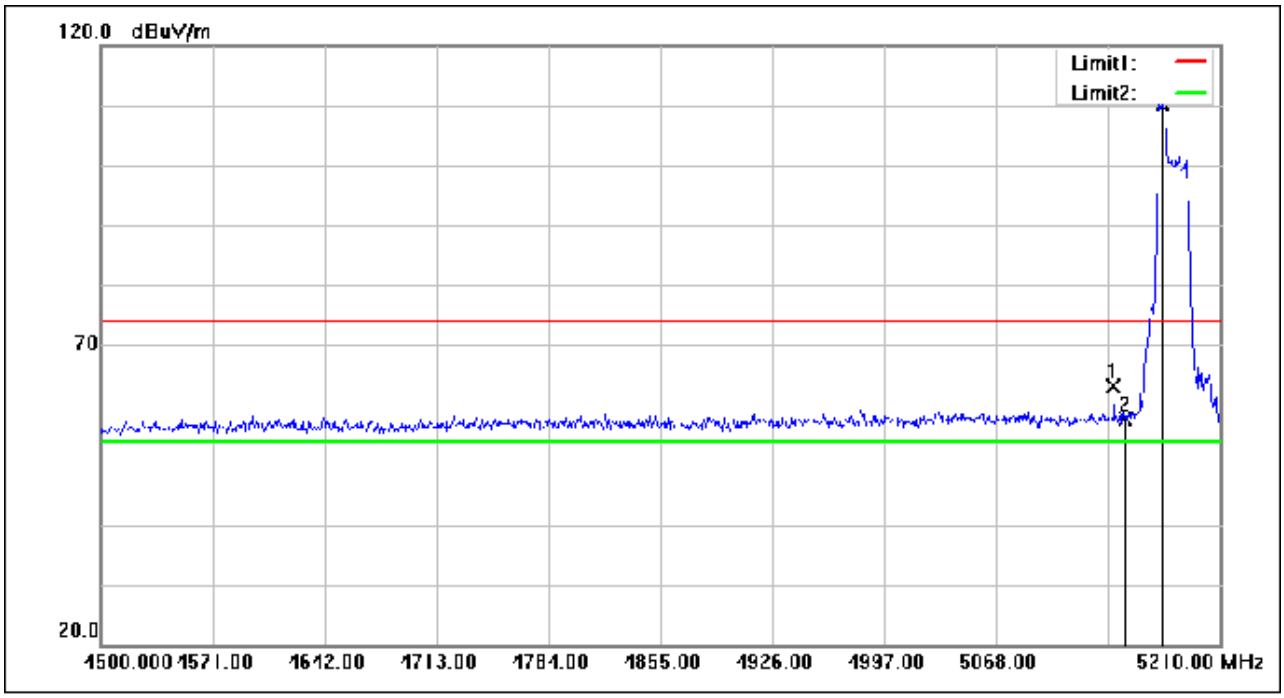


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.550	78.56	-15.50	63.06	74.00	-10.94	peak
2	5150.000	73.05	-15.49	57.56	74.00	-16.44	peak
3	5173.080	125.88	-15.46	110.42	74.00	36.42	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

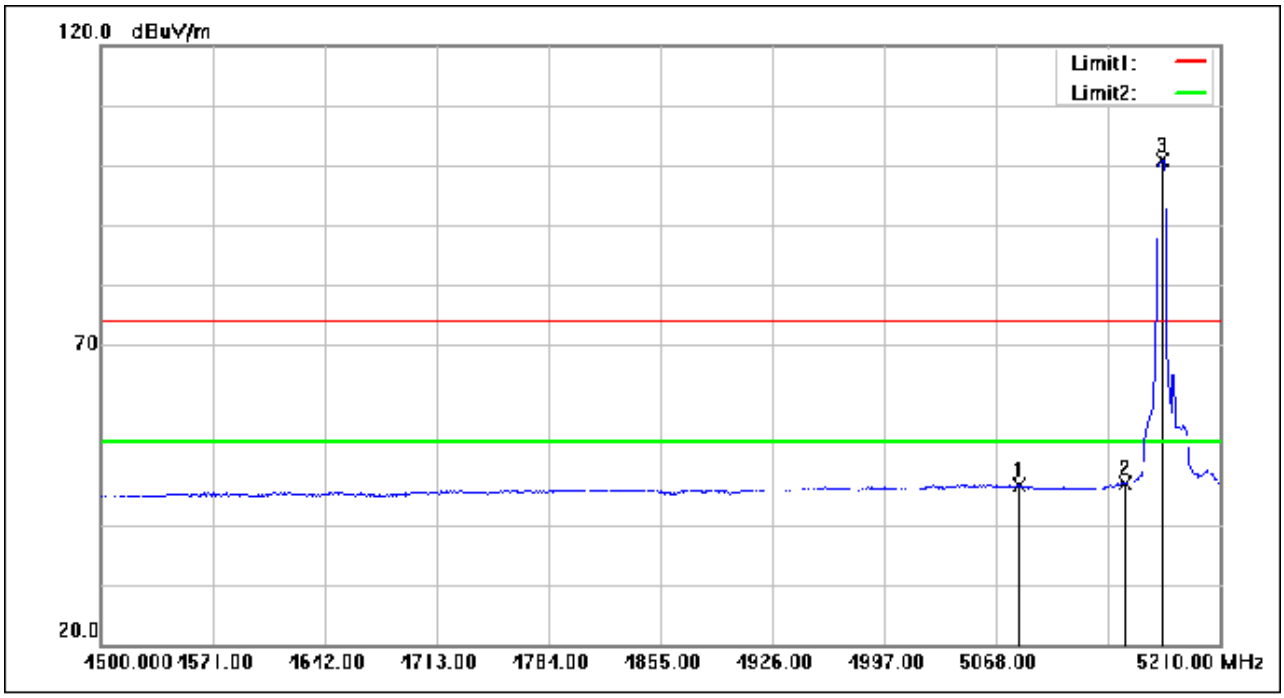


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5082.200	62.30	-15.64	46.66	54.00	-7.34	AVG
2	5150.000	62.38	-15.49	46.89	54.00	-7.11	AVG
3	5173.080	116.39	-15.46	100.93	54.00	46.93	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

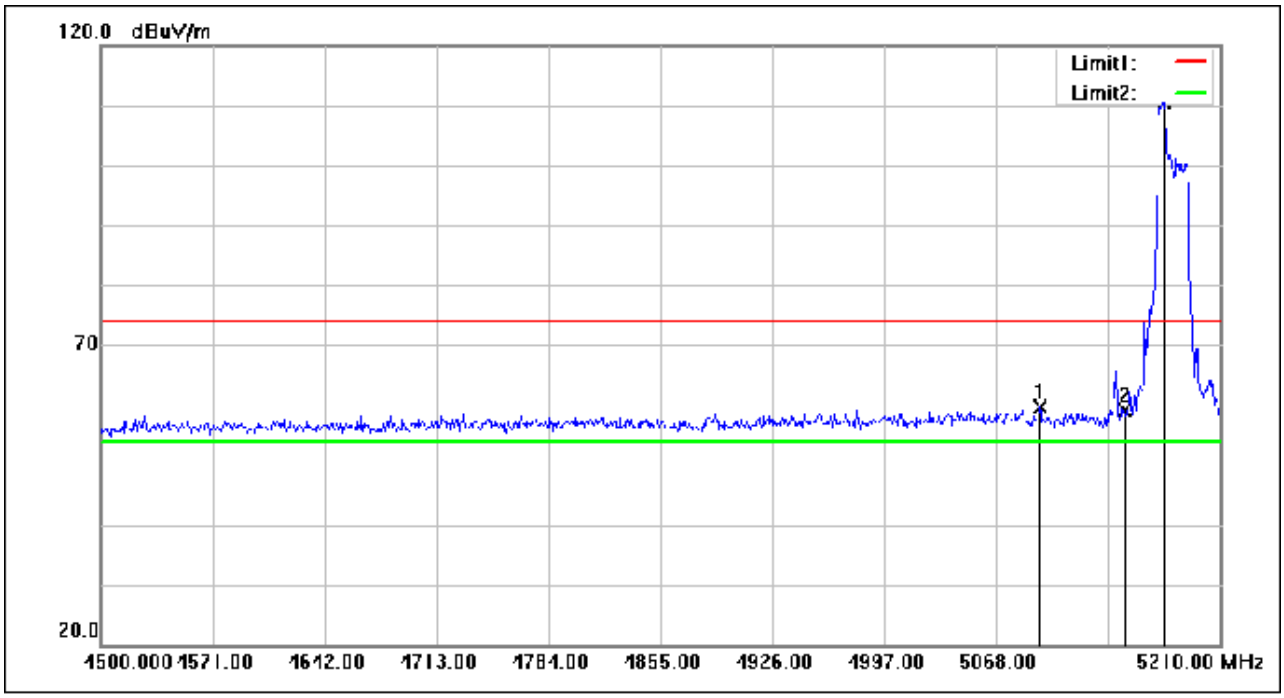


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5095.690	75.14	-15.61	59.53	74.00	-14.47	peak
2	5150.000	74.57	-15.49	59.08	74.00	-14.92	peak
3	5174.500	126.08	-15.46	110.62	74.00	36.62	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

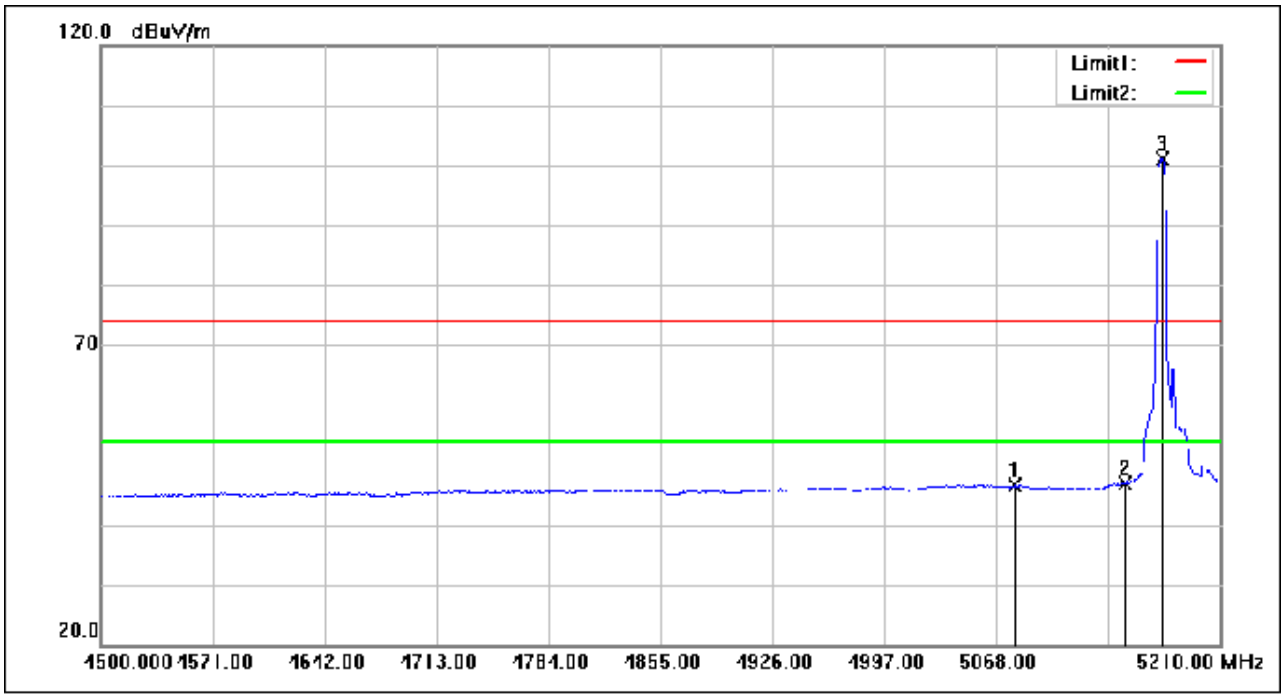


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5080.070	62.19	-15.64	46.55	54.00	-7.45	AVG
2	5150.000	62.45	-15.49	46.96	54.00	-7.04	AVG
3	5173.080	116.51	-15.46	101.05	54.00	47.05	AVG

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

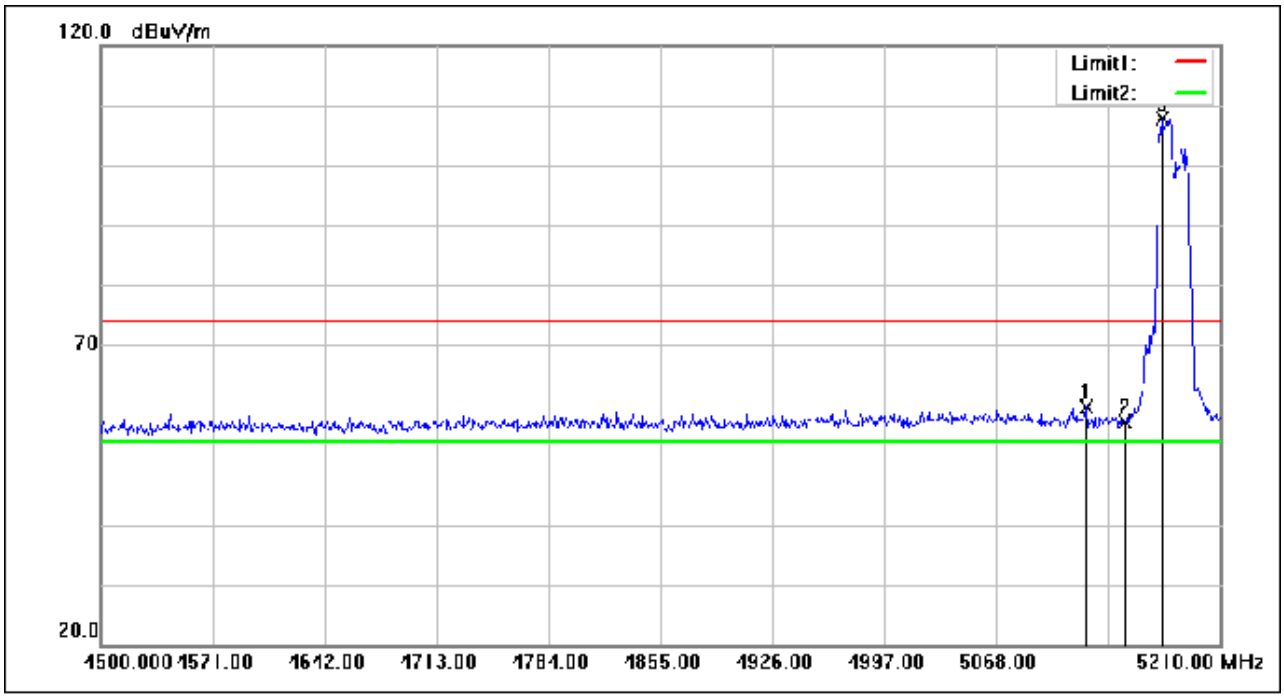


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.800	75.21	-15.54	59.67	74.00	-14.33	peak
2	5150.000	72.57	-15.49	57.08	74.00	-16.92	peak
3	5173.080	123.38	-15.46	107.92	74.00	33.92	peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

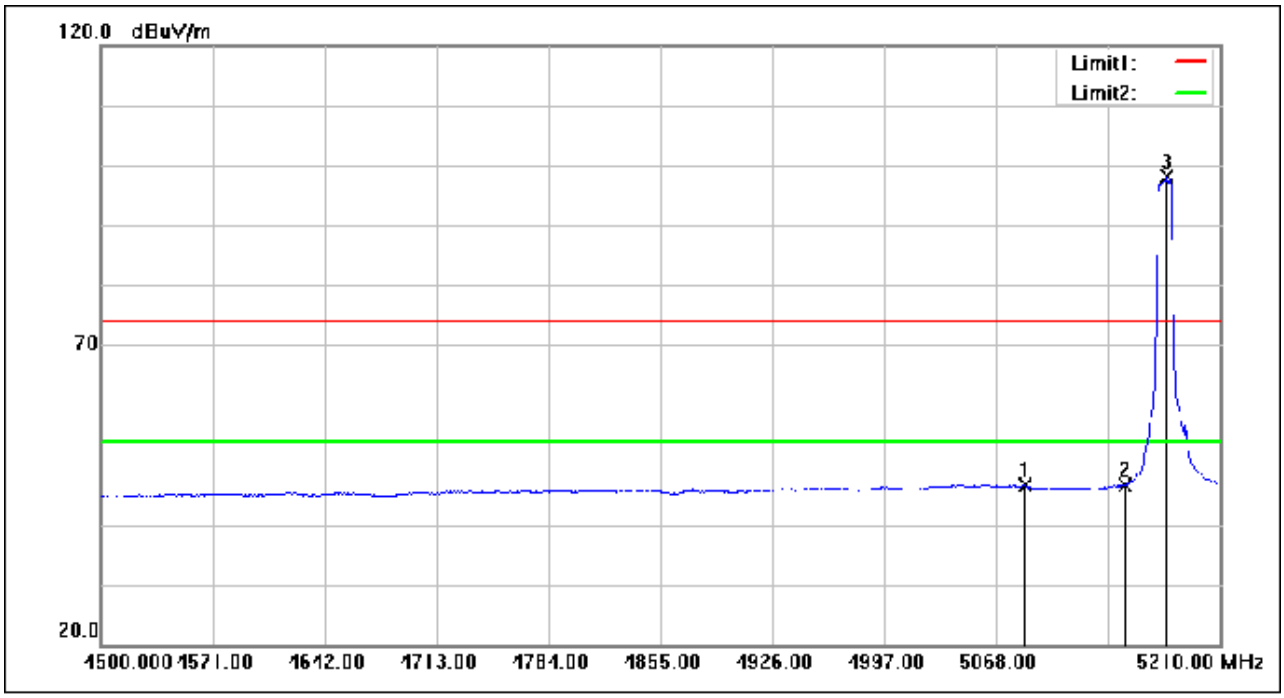


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5086.460	62.20	-15.63	46.57	54.00	-7.43	AVG
2	5150.000	62.24	-15.49	46.75	54.00	-7.25	AVG
3	5176.630	113.61	-15.46	98.15	54.00	44.15	AVG

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

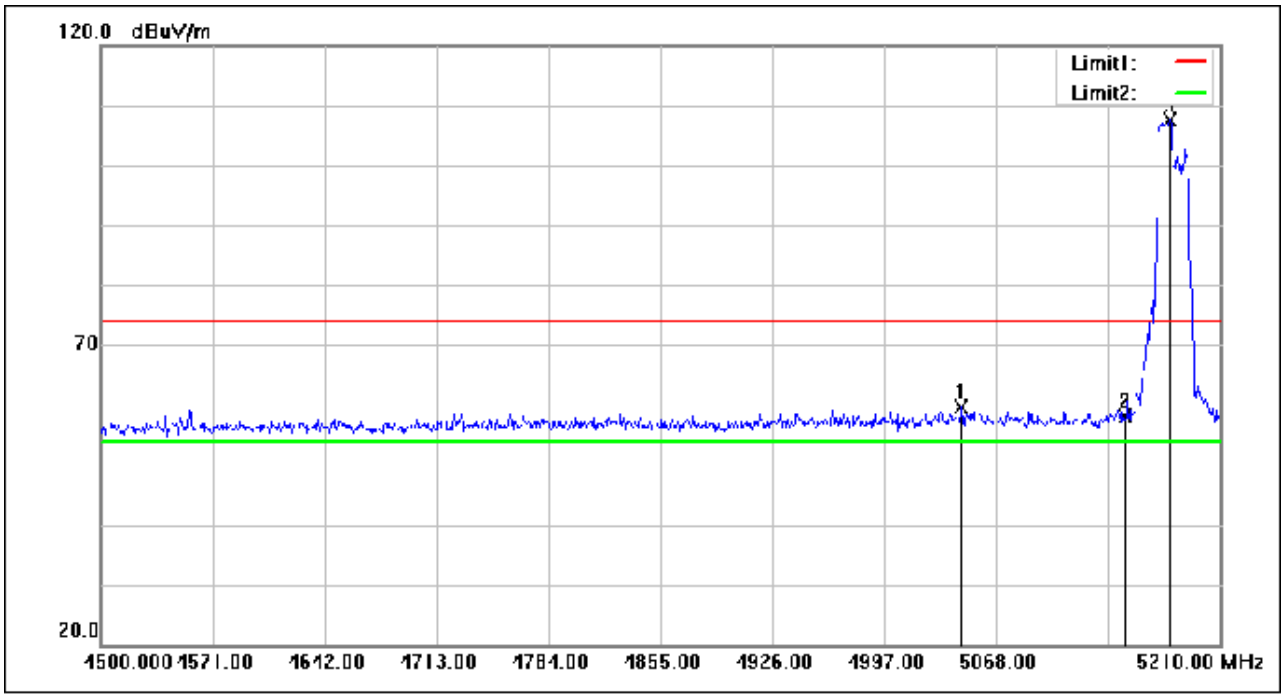


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.990	75.24	-15.73	59.51	74.00	-14.49	peak
2	5150.000	73.54	-15.49	58.05	74.00	-15.95	peak
3	5178.050	123.16	-15.46	107.70	74.00	33.70	peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

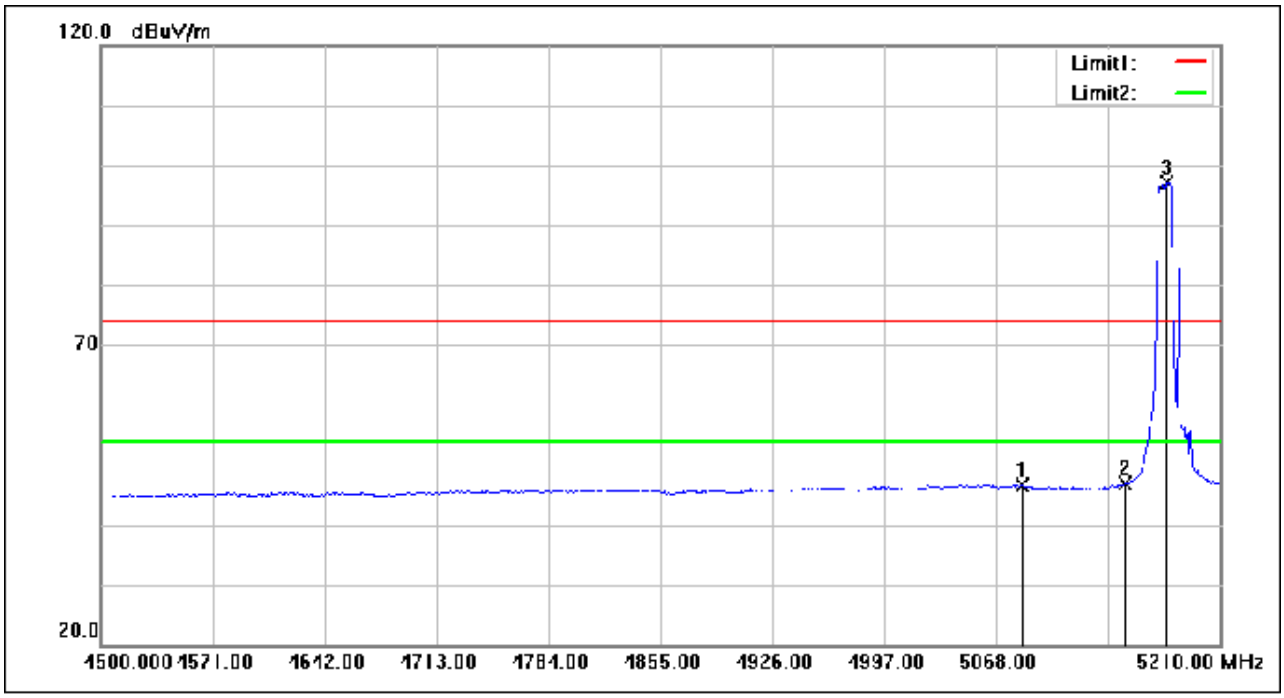


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5084.330	62.32	-15.64	46.68	54.00	-7.32	AVG
2	5150.000	62.28	-15.49	46.79	54.00	-7.21	AVG
3	5176.630	112.65	-15.46	97.19	54.00	43.19	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

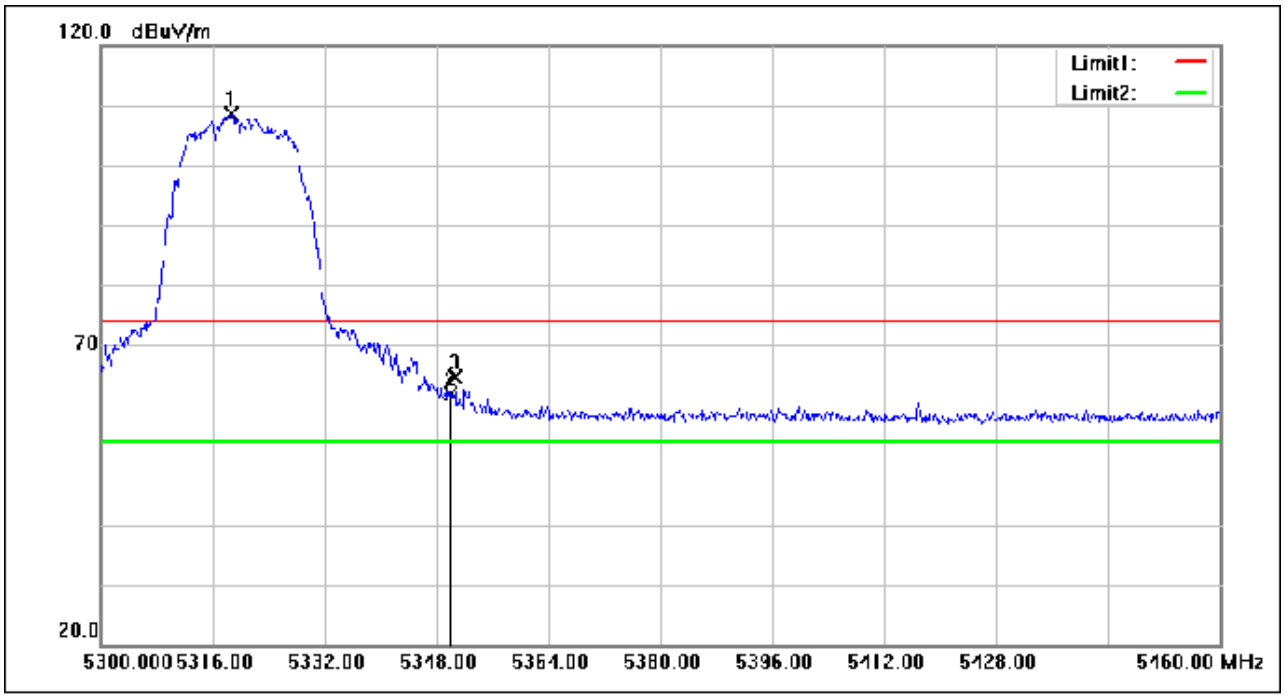


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.720	124.15	-15.46	108.69	74.00	34.69	peak
2	5350.000	77.25	-15.49	61.76	74.00	-12.24	peak
3	5350.720	80.19	-15.49	64.70	74.00	-9.30	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

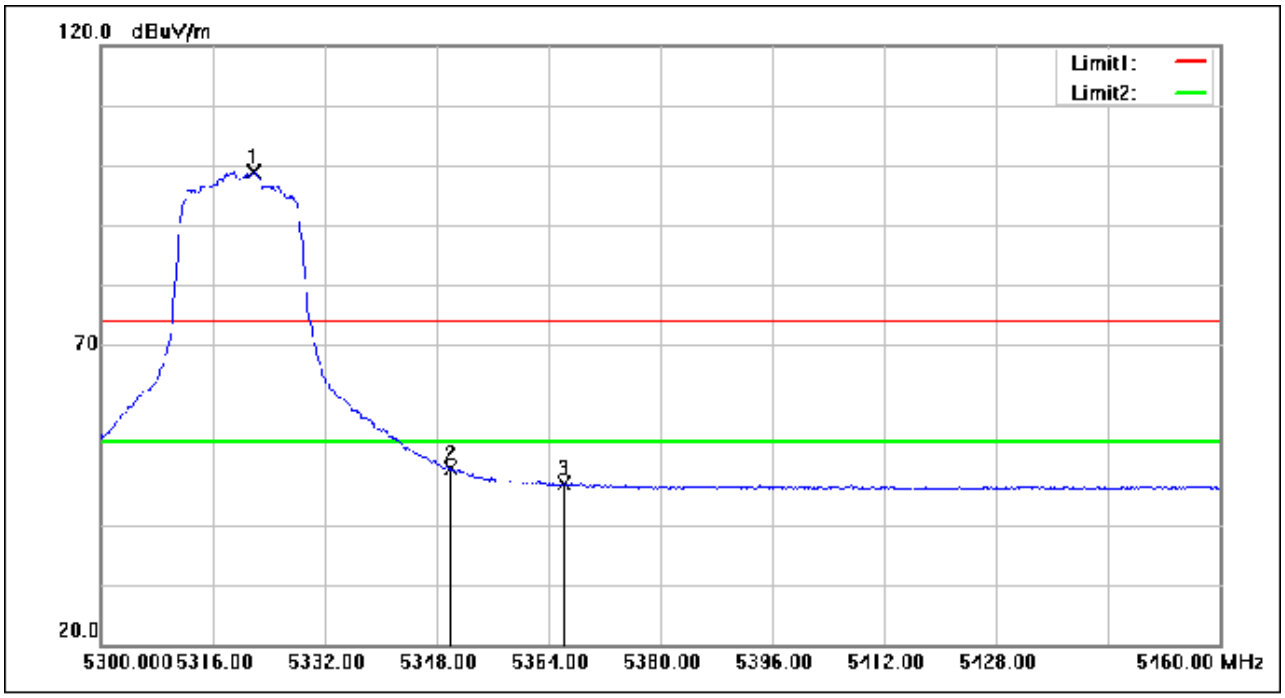


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.920	114.42	-15.46	98.96	54.00	44.96	AVG
2	5350.000	64.81	-15.49	49.32	54.00	-4.68	AVG
3	5366.240	62.35	-15.47	46.88	54.00	-7.12	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

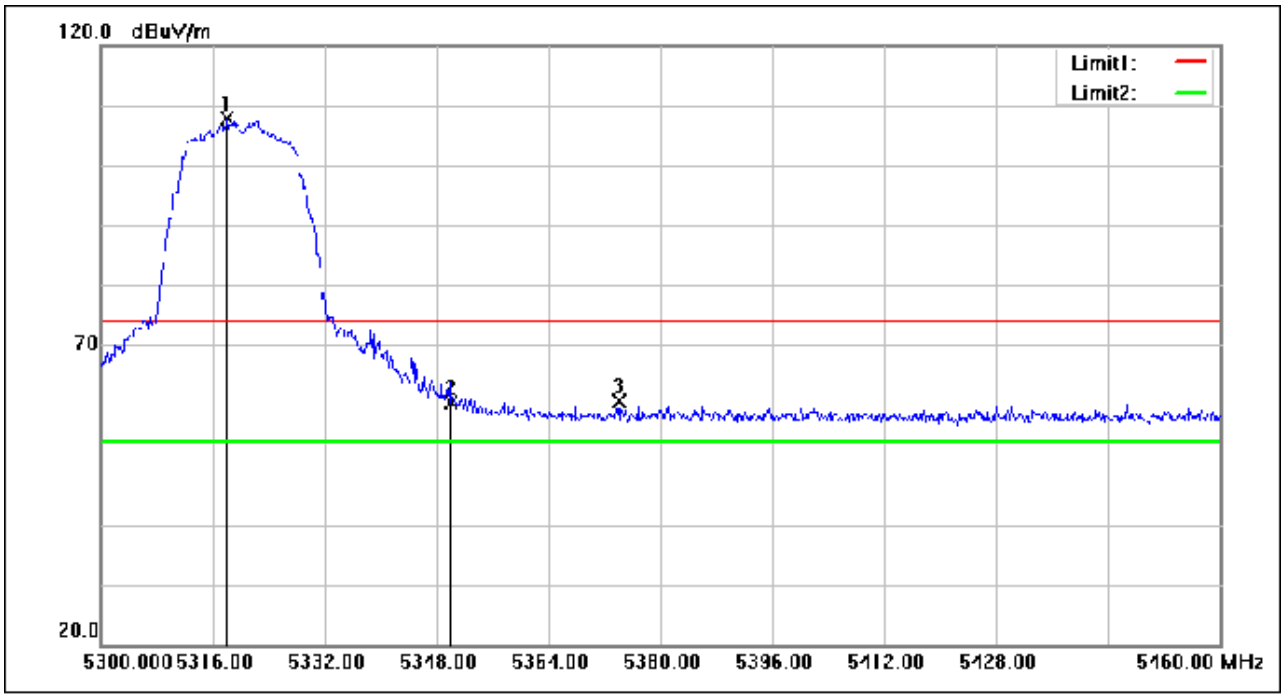


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.080	123.41	-15.46	107.95	74.00	33.95	peak
2	5350.000	75.88	-15.49	60.39	74.00	-13.61	peak
3	5374.080	76.19	-15.45	60.74	74.00	-13.26	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

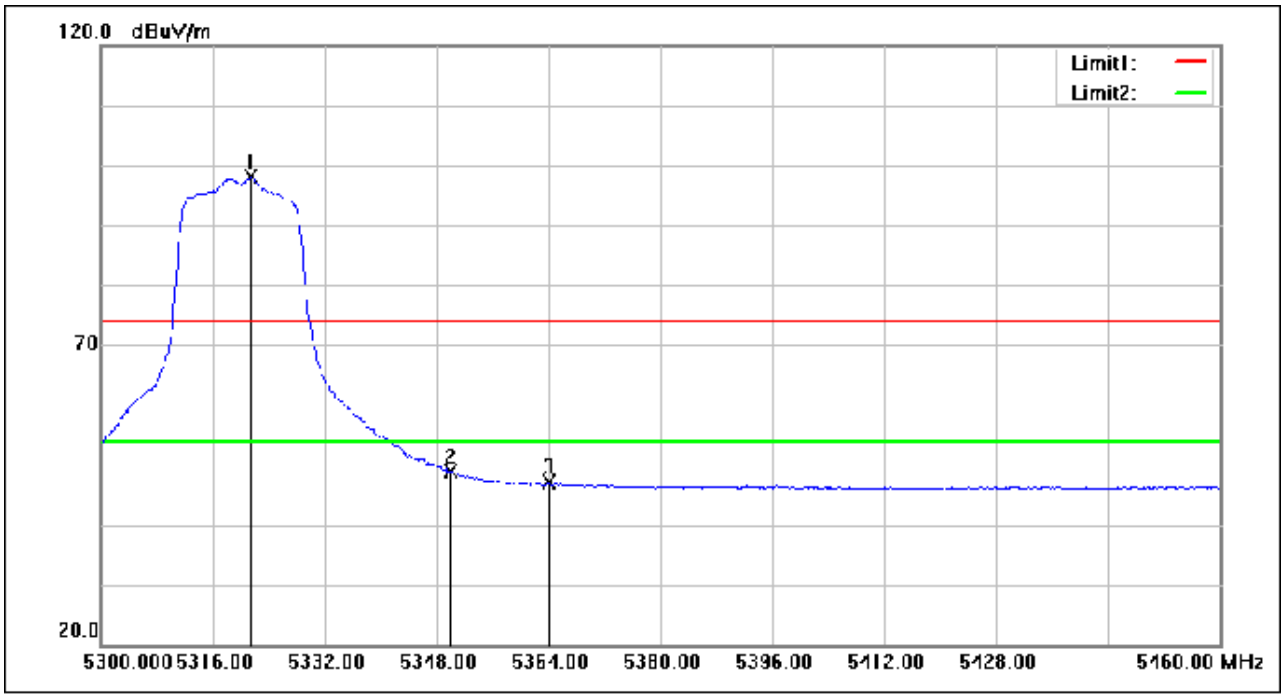


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.440	113.50	-15.46	98.04	54.00	44.04	AVG
2	5350.000	64.36	-15.49	48.87	54.00	-5.13	AVG
3	5364.000	62.48	-15.47	47.01	54.00	-6.99	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

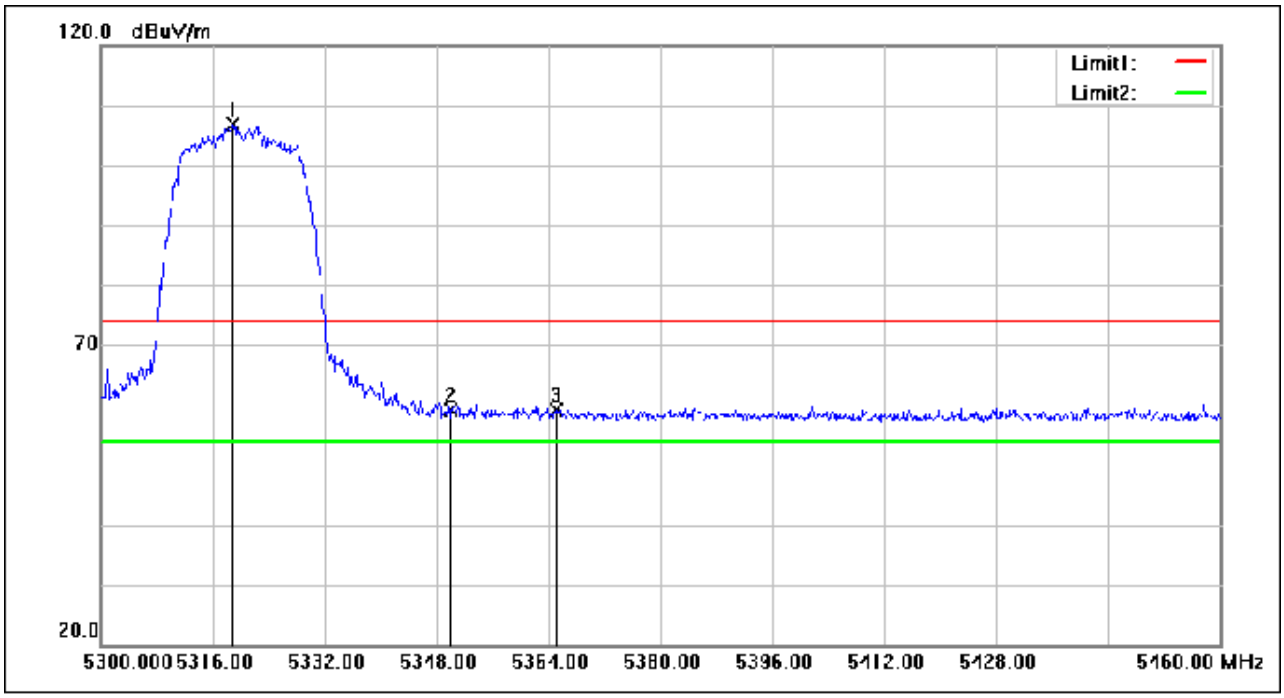


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.880	122.35	-15.46	106.89	74.00	32.89	peak
2	5350.000	74.60	-15.49	59.11	74.00	-14.89	peak
3	5365.120	74.63	-15.47	59.16	74.00	-14.84	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

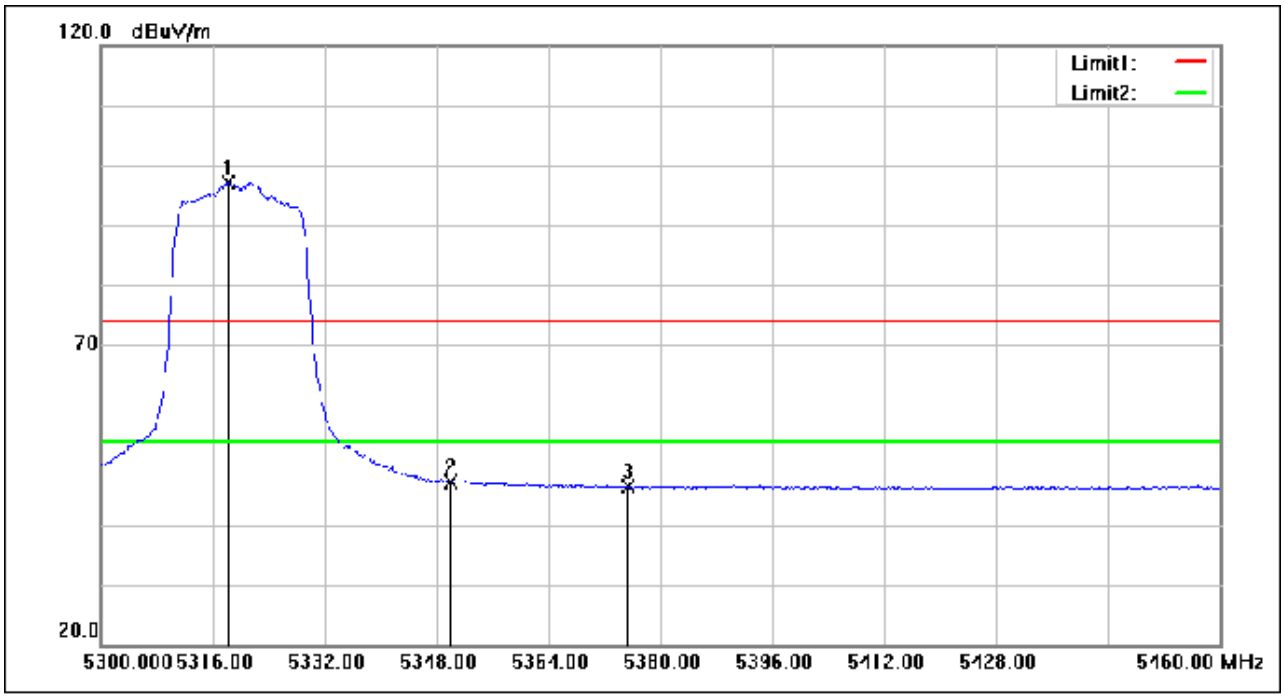


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.240	112.67	-15.46	97.21	54.00	43.21	AVG
2	5350.000	62.52	-15.49	47.03	54.00	-6.97	AVG
3	5375.360	61.94	-15.45	46.49	54.00	-7.51	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

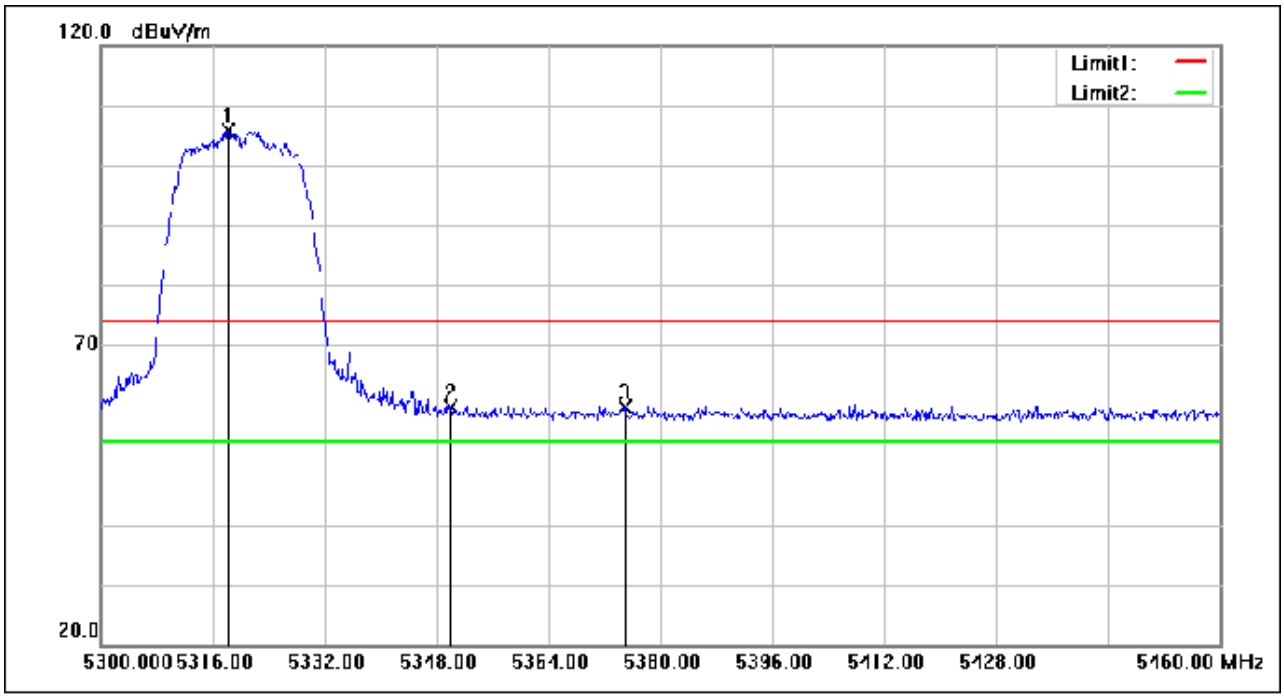


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.240	121.35	-15.46	105.89	74.00	31.89	peak
2	5350.000	75.21	-15.49	59.72	74.00	-14.28	peak
3	5374.880	75.16	-15.45	59.71	74.00	-14.29	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

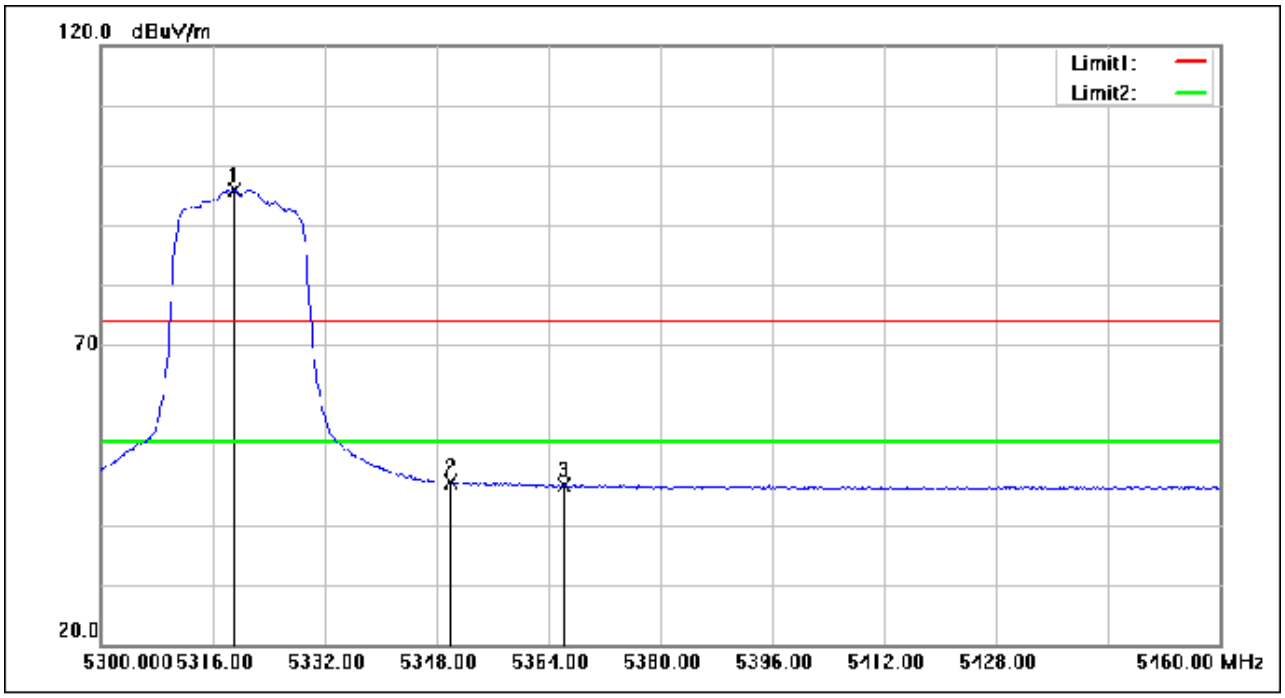


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.040	111.42	-15.46	95.96	54.00	41.96	AVG
2	5350.000	62.70	-15.49	47.21	54.00	-6.79	AVG
3	5366.240	62.10	-15.47	46.63	54.00	-7.37	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

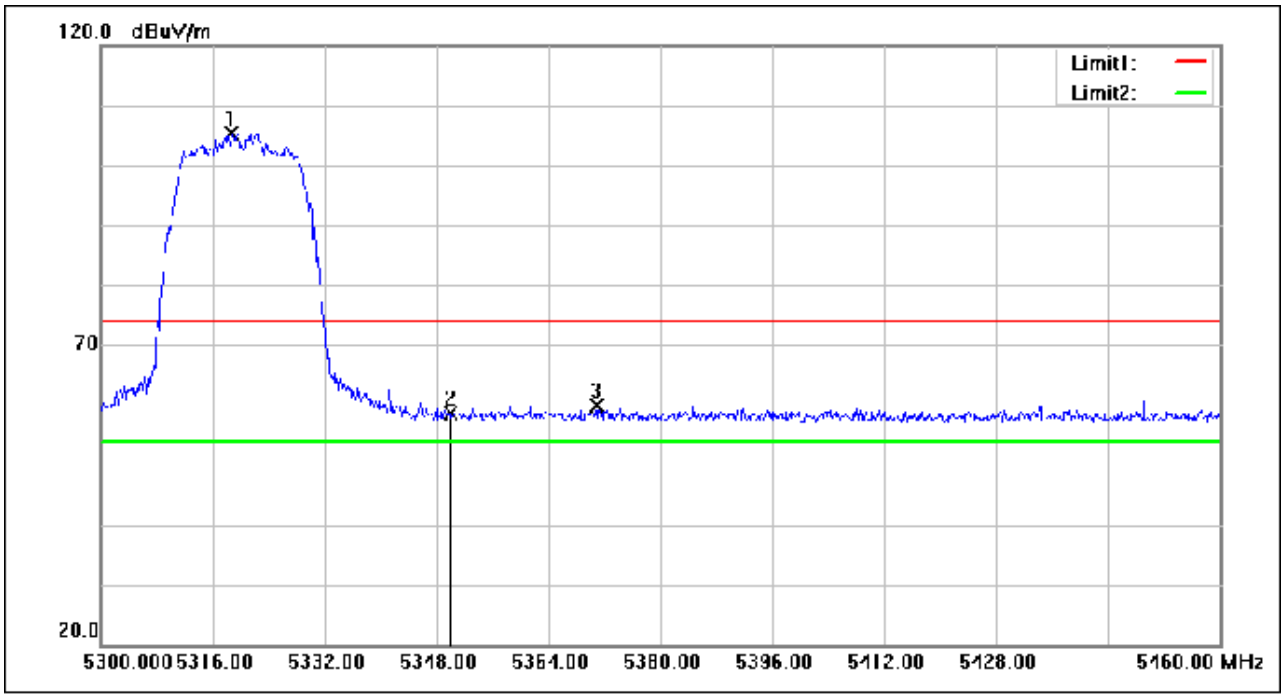


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.720	120.96	-15.46	105.50	74.00	31.50	peak
2	5350.000	74.02	-15.49	58.53	74.00	-15.47	peak
3	5370.880	75.23	-15.45	59.78	74.00	-14.22	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

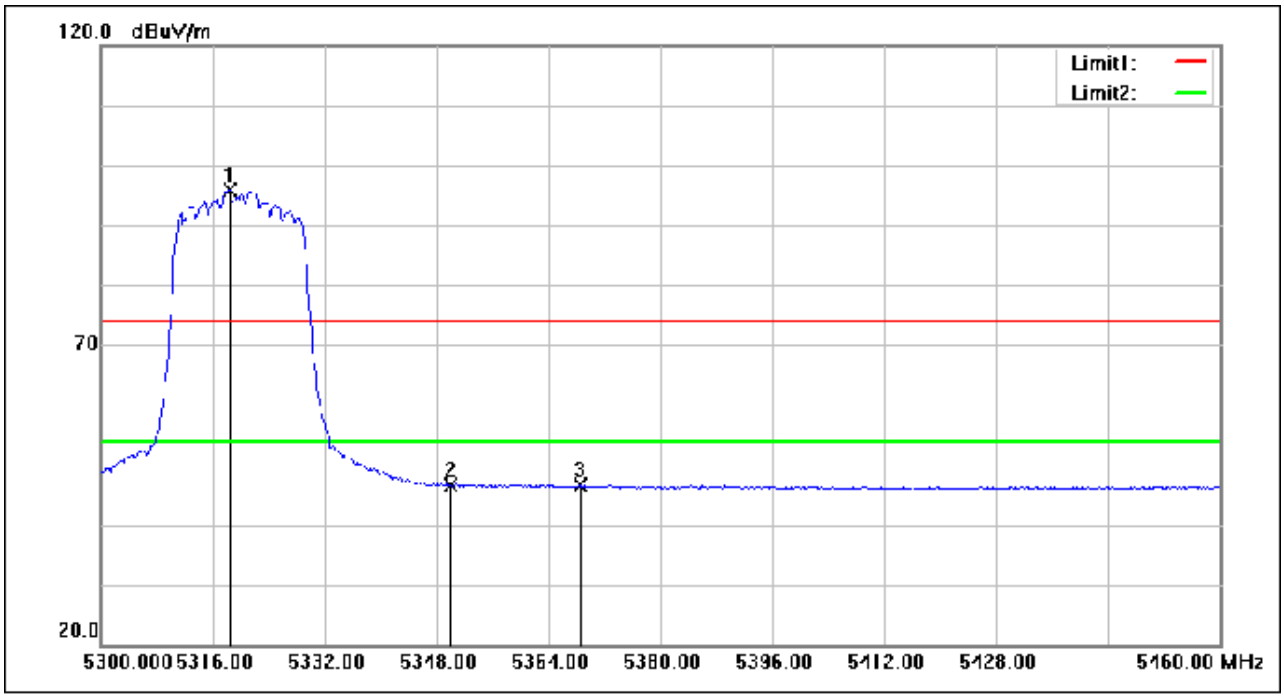


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.400	111.39	-15.46	95.93	54.00	41.93	AVG
2	5350.000	62.06	-15.49	46.57	54.00	-7.43	AVG
3	5368.480	62.07	-15.45	46.62	54.00	-7.38	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

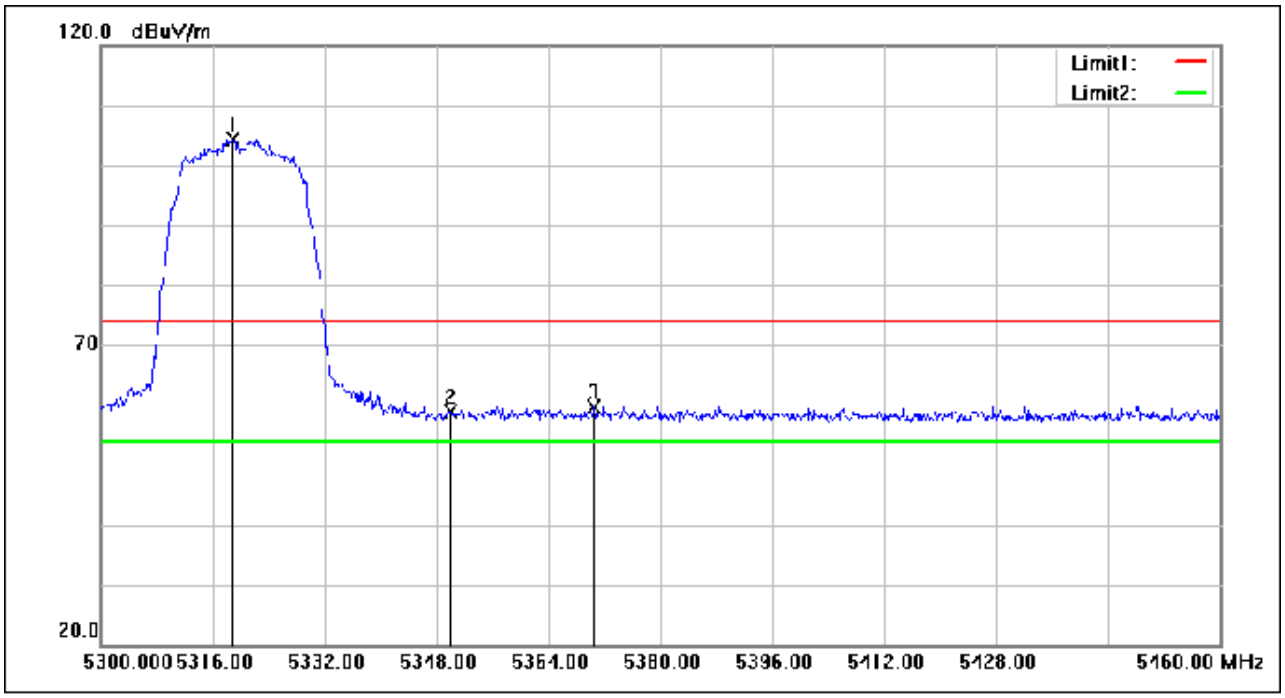


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.880	119.78	-15.46	104.32	74.00	30.32	peak
2	5350.000	74.28	-15.49	58.79	74.00	-15.21	peak
3	5370.560	75.02	-15.45	59.57	74.00	-14.43	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

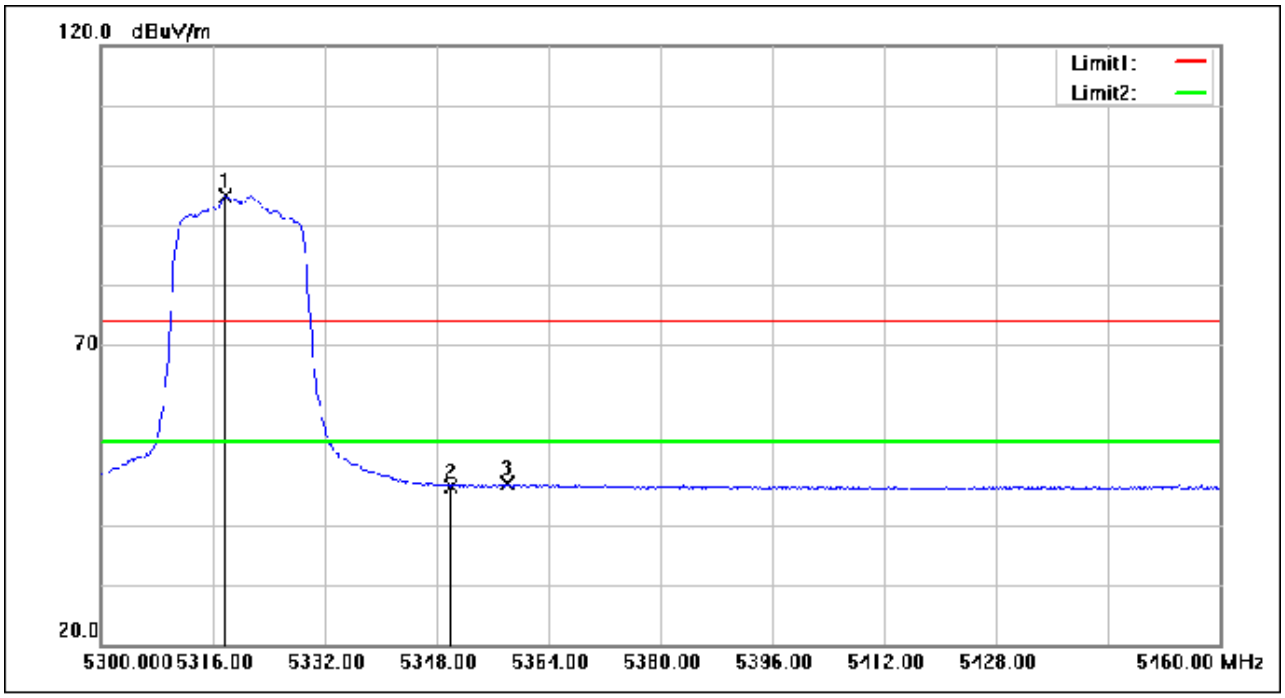


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5317.760	110.36	-15.46	94.90	54.00	40.90	AVG
2	5350.000	61.88	-15.49	46.39	54.00	-7.61	AVG
3	5358.080	62.23	-15.47	46.76	54.00	-7.24	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

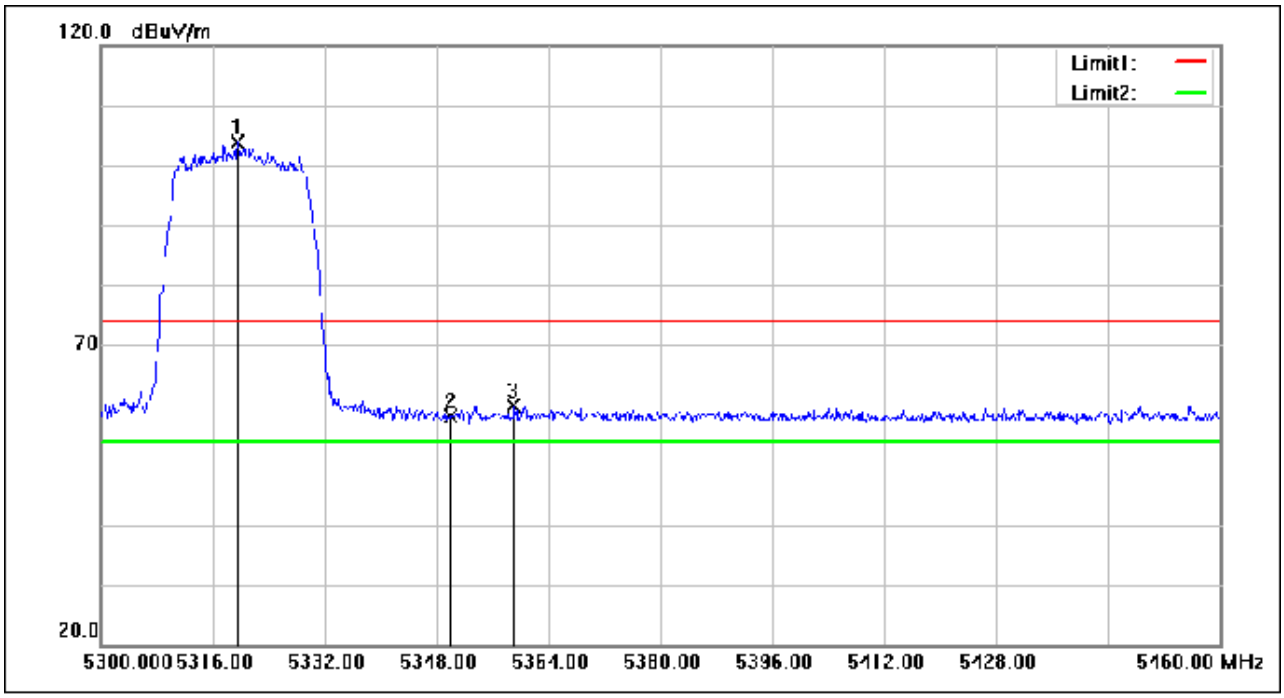


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.520	119.26	-15.46	103.80	74.00	29.80	peak
2	5350.000	73.65	-15.49	58.16	74.00	-15.84	peak
3	5359.040	75.26	-15.47	59.79	74.00	-14.21	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

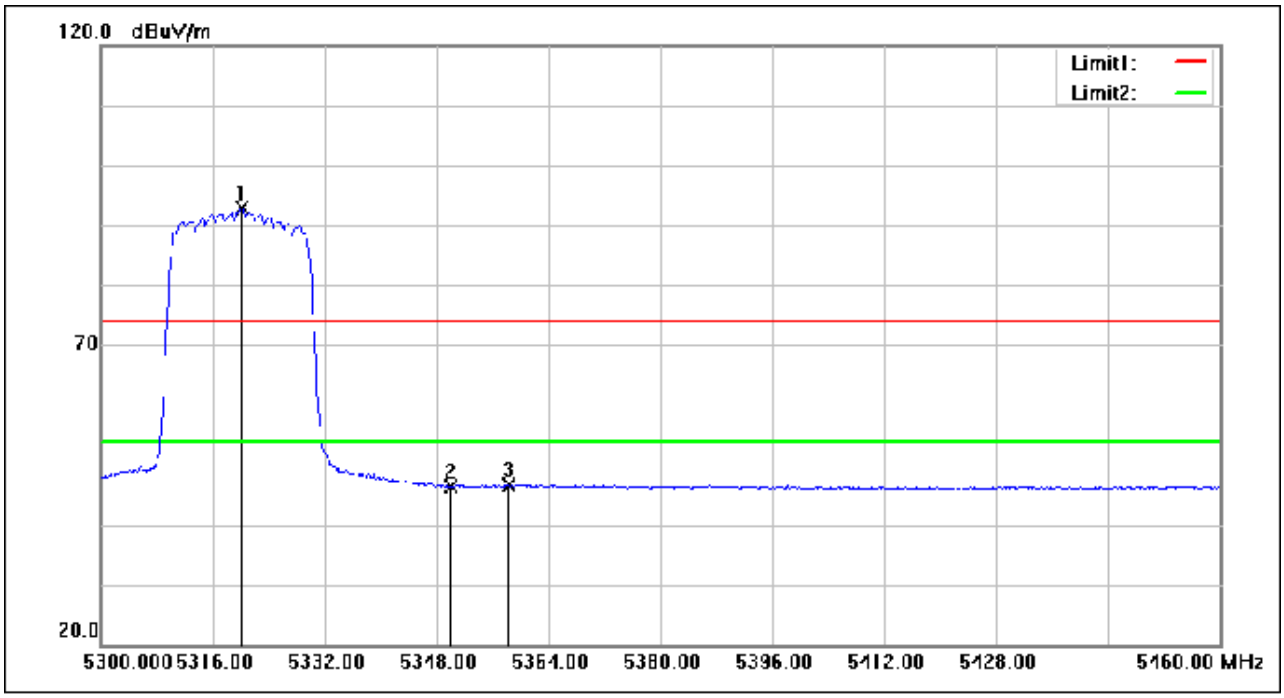


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5320.160	108.32	-15.46	92.86	54.00	38.86	AVG
2	5350.000	61.85	-15.49	46.36	54.00	-7.64	AVG
3	5358.240	62.20	-15.47	46.73	54.00	-7.27	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

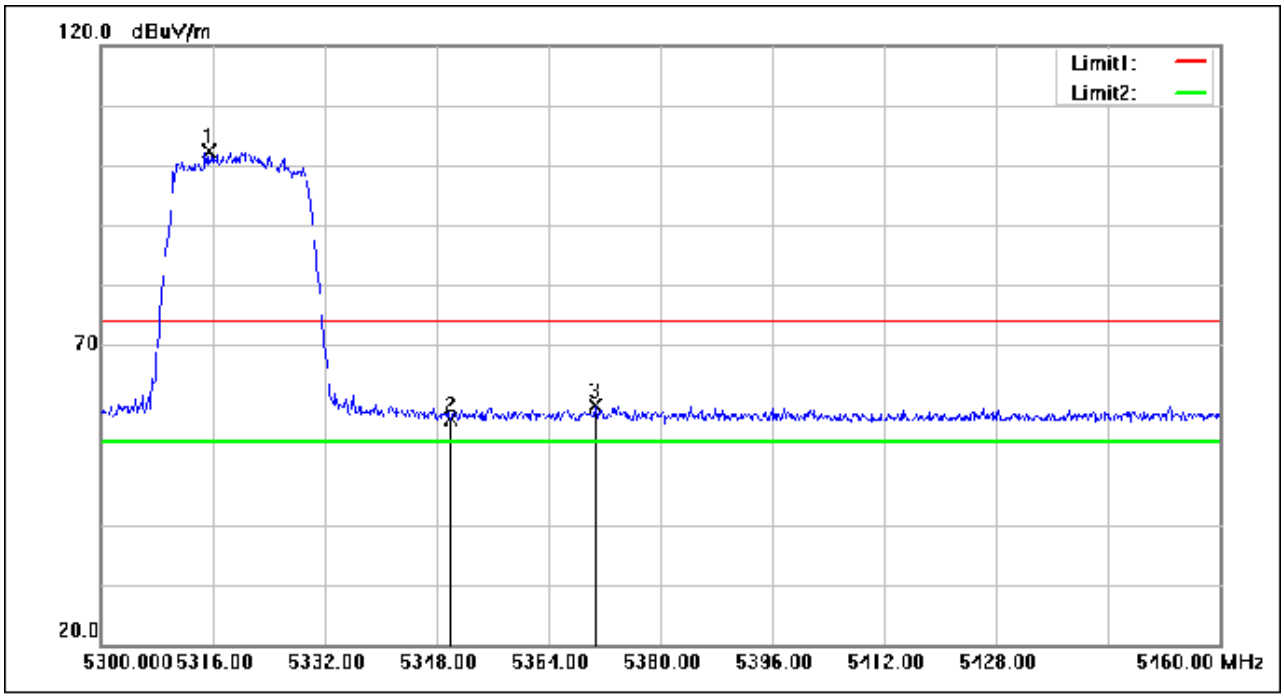


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5315.360	117.96	-15.46	102.50	74.00	28.50	peak
2	5350.000	73.07	-15.49	57.58	74.00	-16.42	peak
3	5370.720	75.24	-15.45	59.79	74.00	-14.21	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

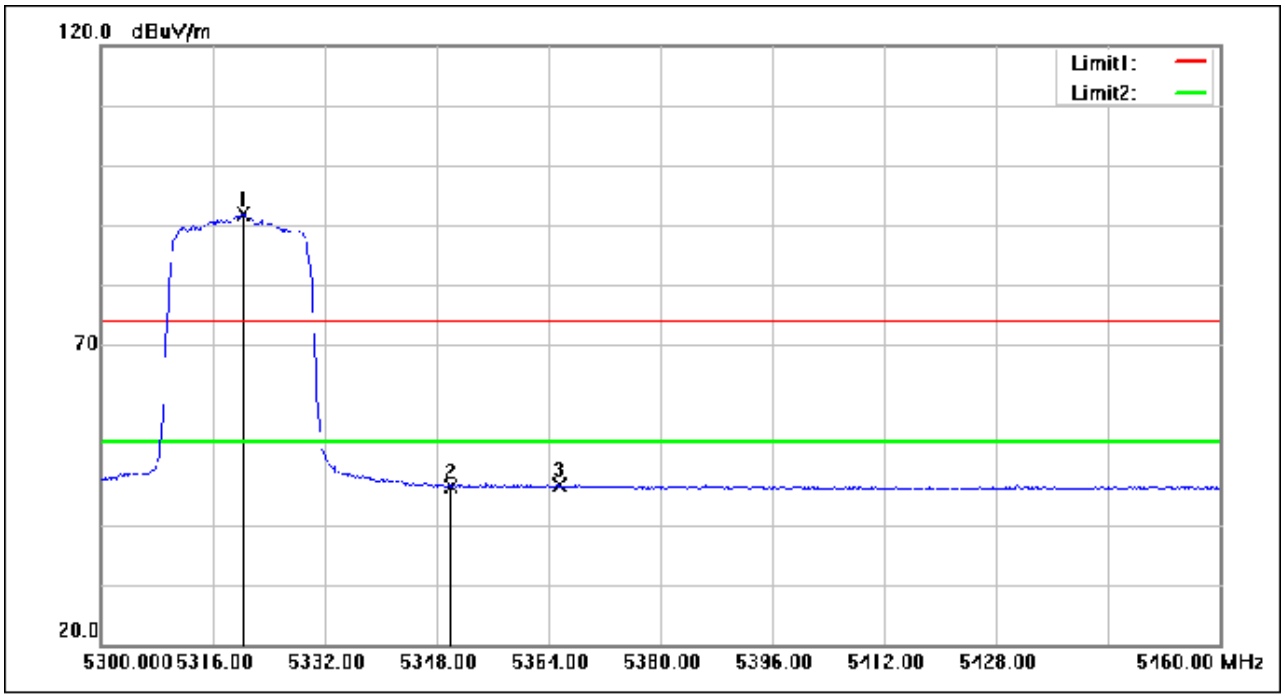


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5320.320	107.37	-15.46	91.91	54.00	37.91	AVG
2	5350.000	61.96	-15.49	46.47	54.00	-7.53	AVG
3	5365.600	62.09	-15.47	46.62	54.00	-7.38	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

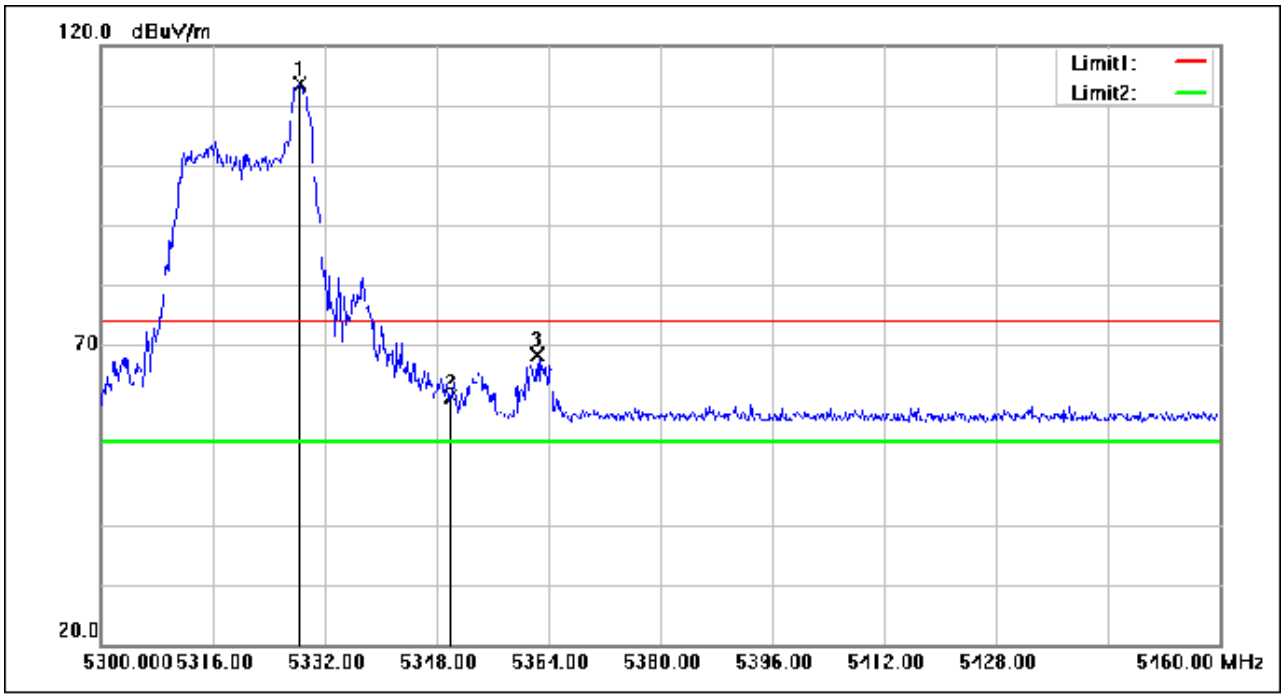


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	129.19	-15.47	113.72	74.00	39.72	peak
2	5350.000	76.97	-15.49	61.48	74.00	-12.52	peak
3	5362.400	83.84	-15.47	68.37	74.00	-5.63	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

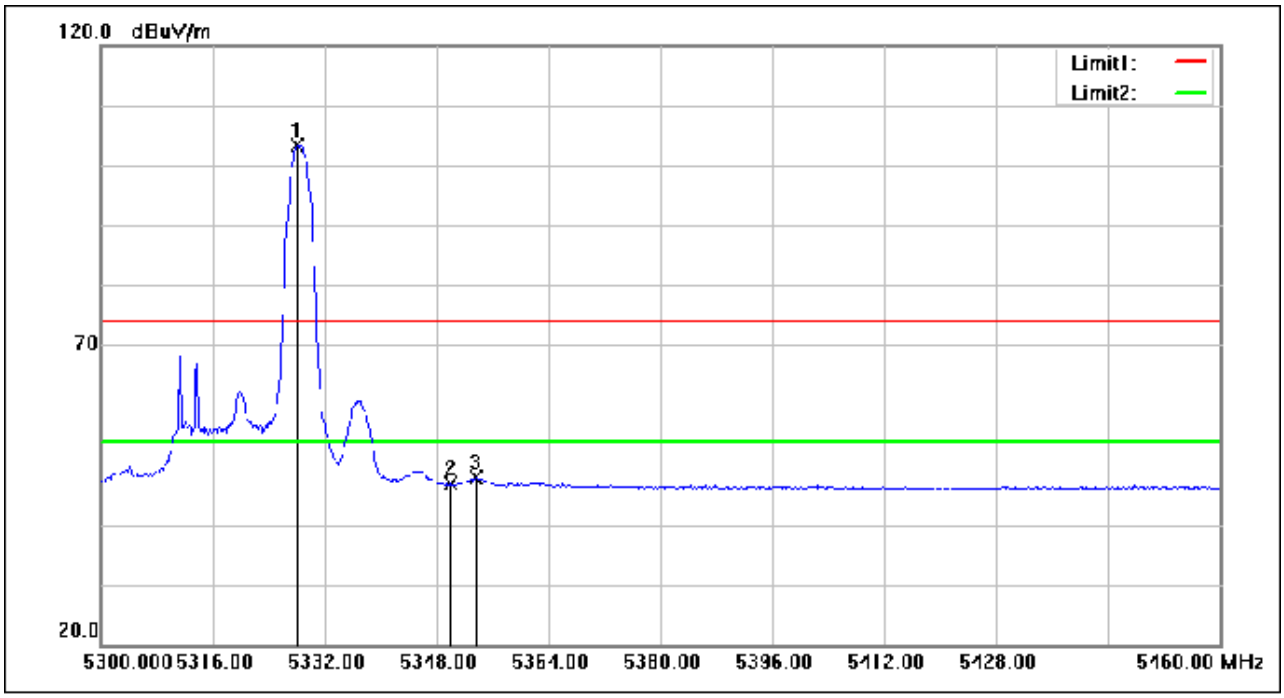


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.000	118.85	-15.47	103.38	54.00	49.38	AVG
2	5350.000	62.26	-15.49	46.77	54.00	-7.23	AVG
3	5353.600	63.39	-15.49	47.90	54.00	-6.10	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

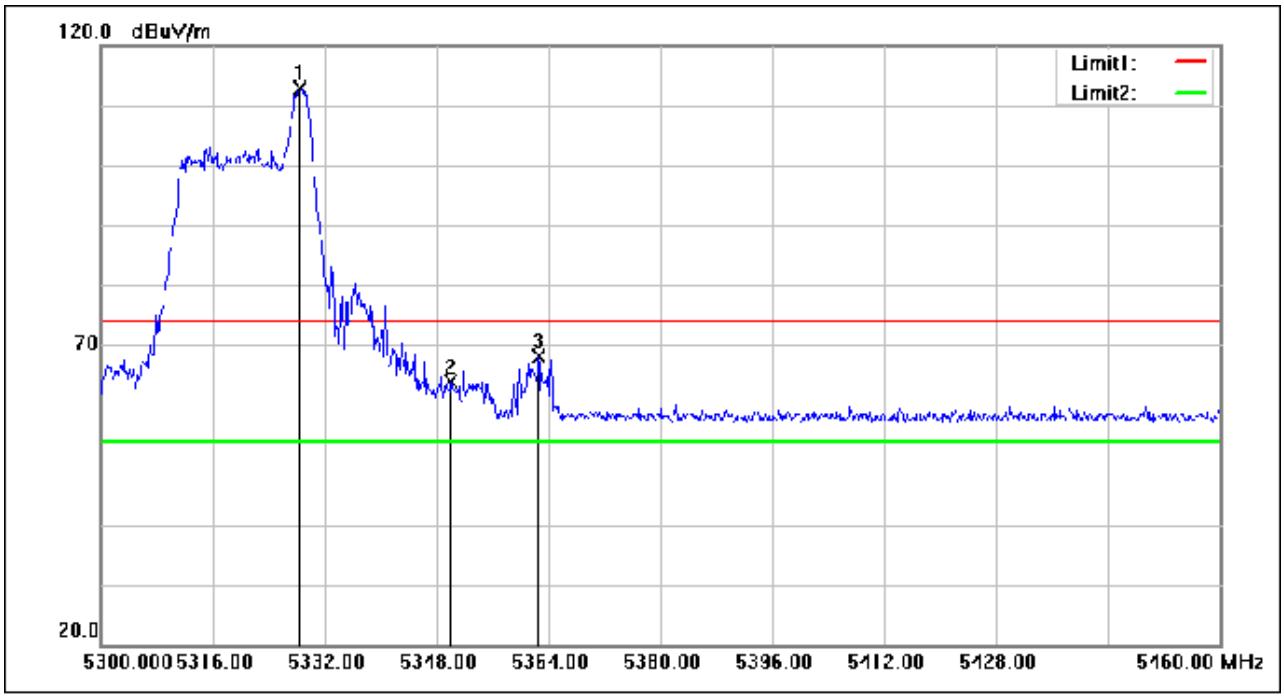


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	128.33	-15.47	112.86	74.00	38.86	peak
2	5350.000	79.27	-15.49	63.78	74.00	-10.22	peak
3	5362.560	83.52	-15.47	68.05	74.00	-5.95	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

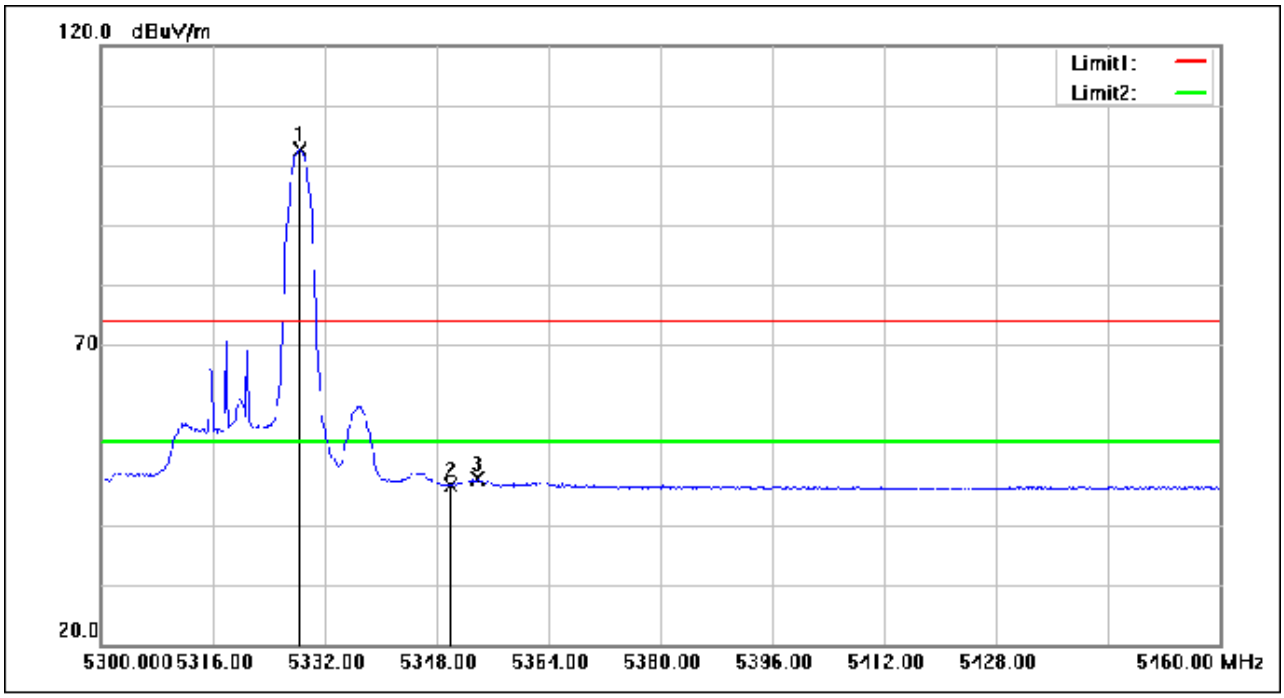


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	118.07	-15.47	102.60	54.00	48.60	AVG
2	5350.000	62.15	-15.49	46.66	54.00	-7.34	AVG
3	5353.760	63.20	-15.49	47.71	54.00	-6.29	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

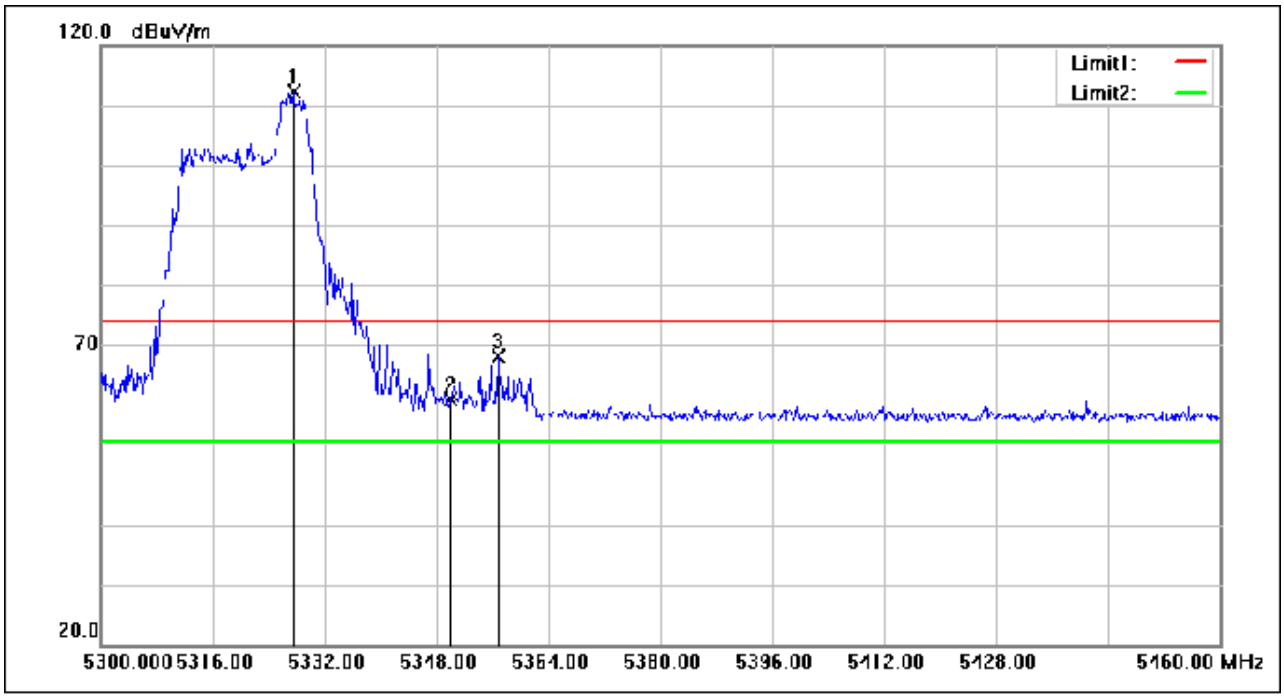


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.520	127.88	-15.47	112.41	74.00	38.41	peak
2	5350.000	76.26	-15.49	60.77	74.00	-13.23	peak
3	5356.800	83.58	-15.48	68.10	74.00	-5.90	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

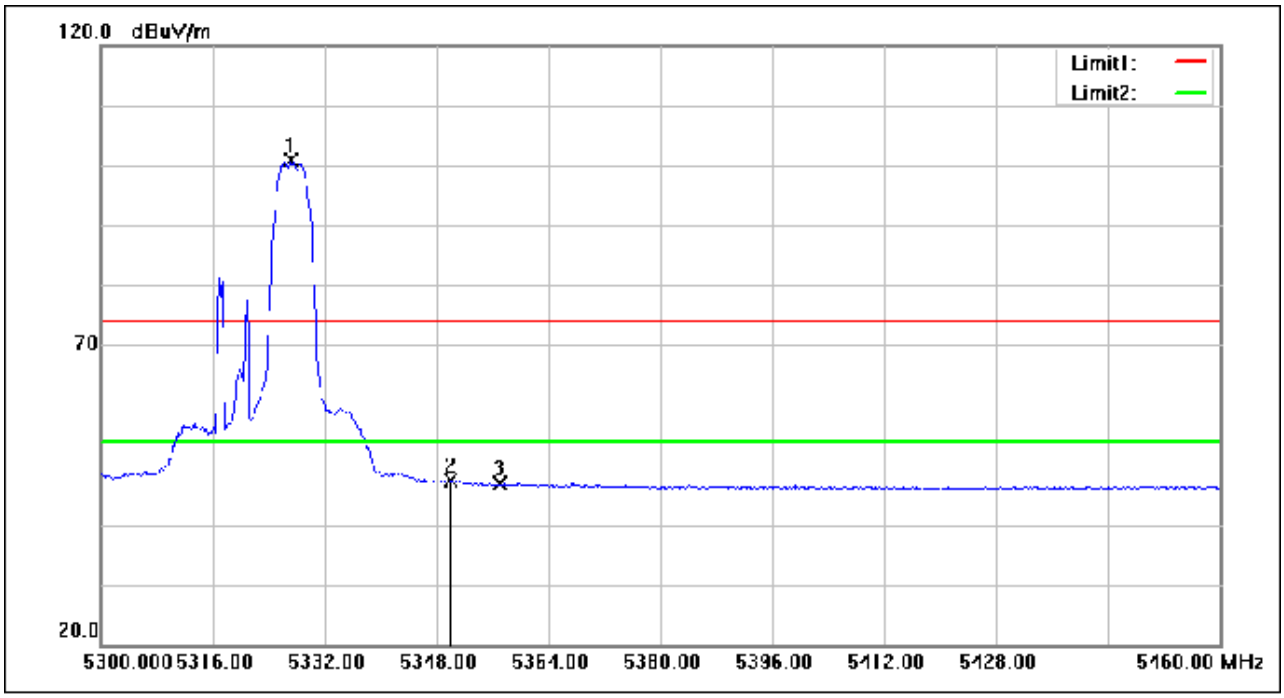


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.200	116.39	-15.46	100.93	54.00	46.93	AVG
2	5350.000	62.96	-15.49	47.47	54.00	-6.53	AVG
3	5357.120	62.35	-15.48	46.87	54.00	-7.13	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

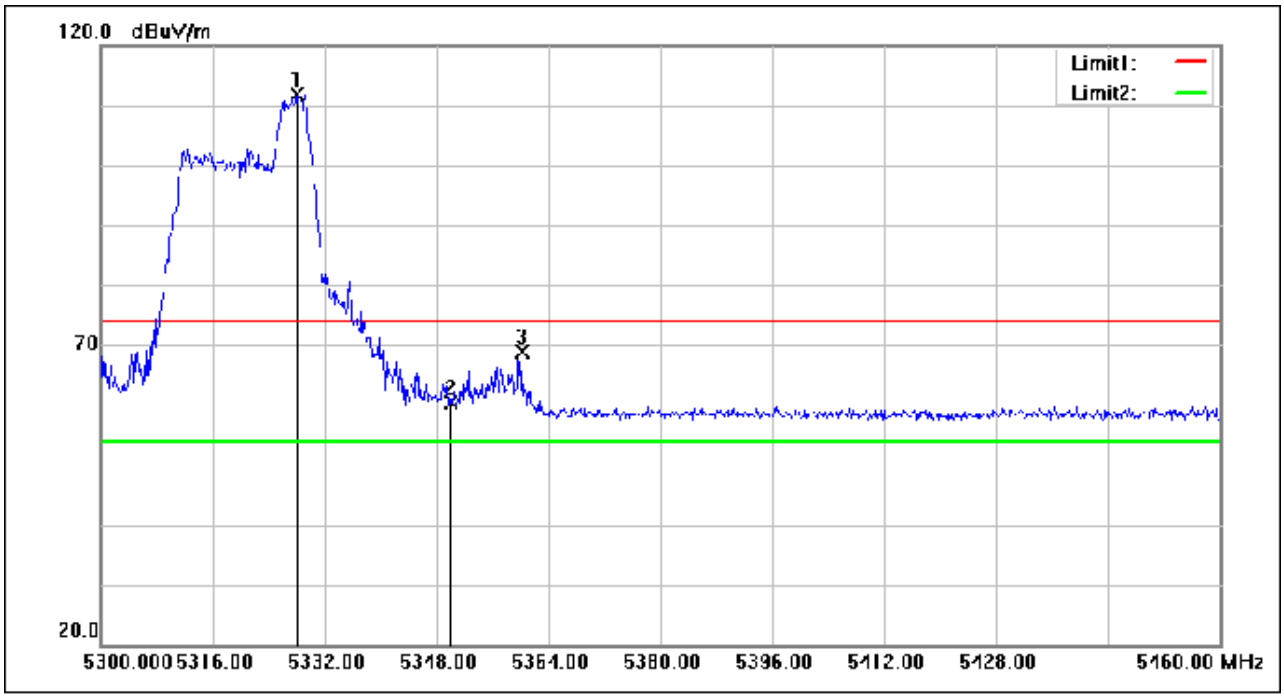


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.000	127.42	-15.47	111.95	74.00	37.95	peak
2	5350.000	75.85	-15.49	60.36	74.00	-13.64	peak
3	5360.160	84.39	-15.47	68.92	74.00	-5.08	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

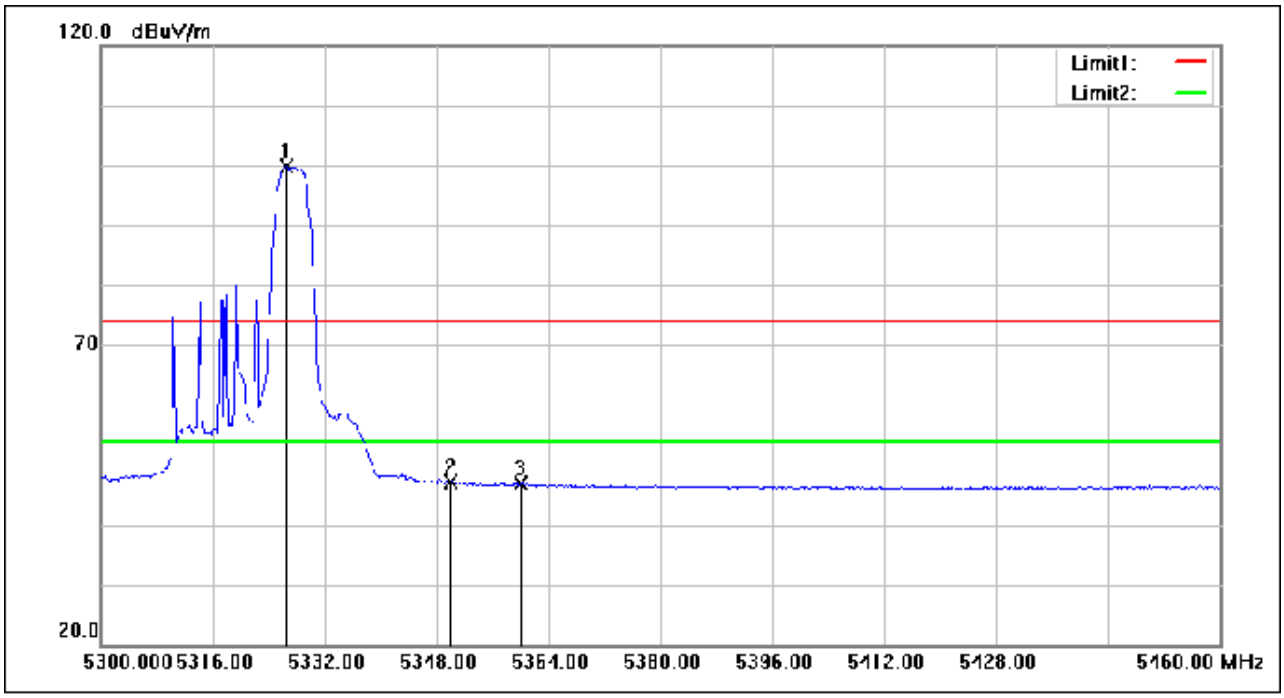


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5326.560	115.32	-15.47	99.85	54.00	45.85	AVG
2	5350.000	62.58	-15.49	47.09	54.00	-6.91	AVG
3	5360.000	62.42	-15.47	46.95	54.00	-7.05	AVG

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

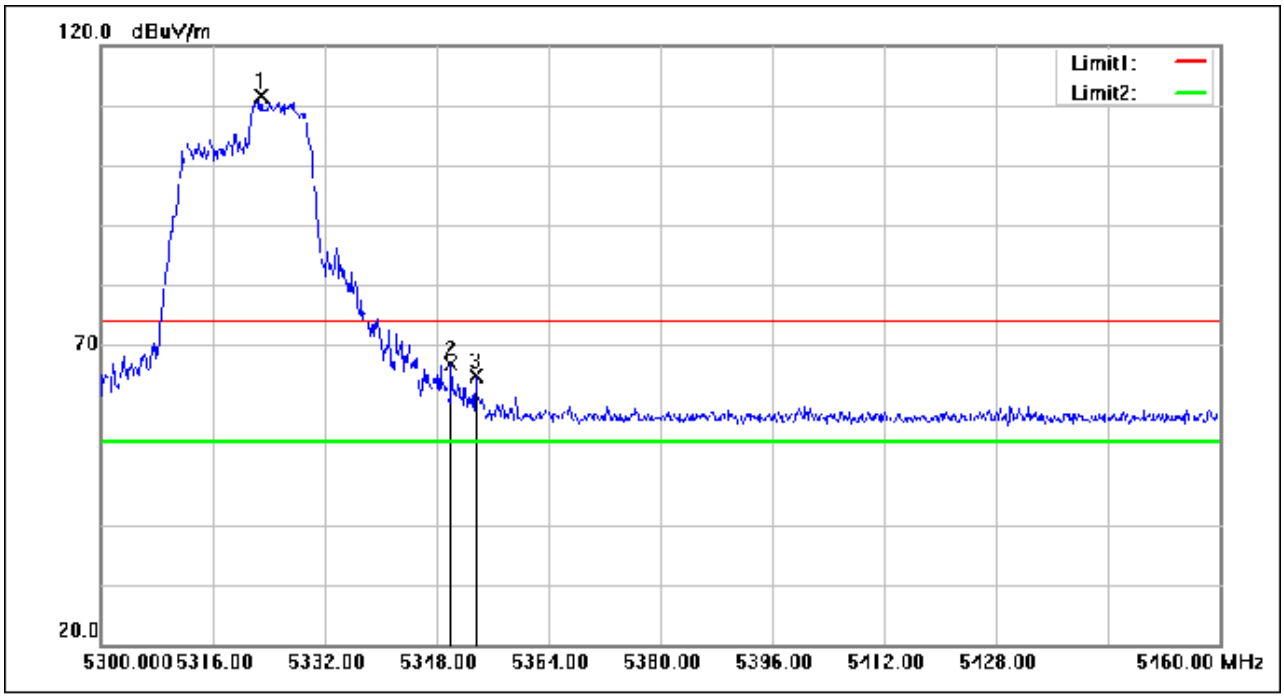


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.880	127.09	-15.47	111.62	74.00	37.62	peak
2	5350.000	82.47	-15.49	66.98	74.00	-7.02	peak
3	5353.600	80.29	-15.49	64.80	74.00	-9.20	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

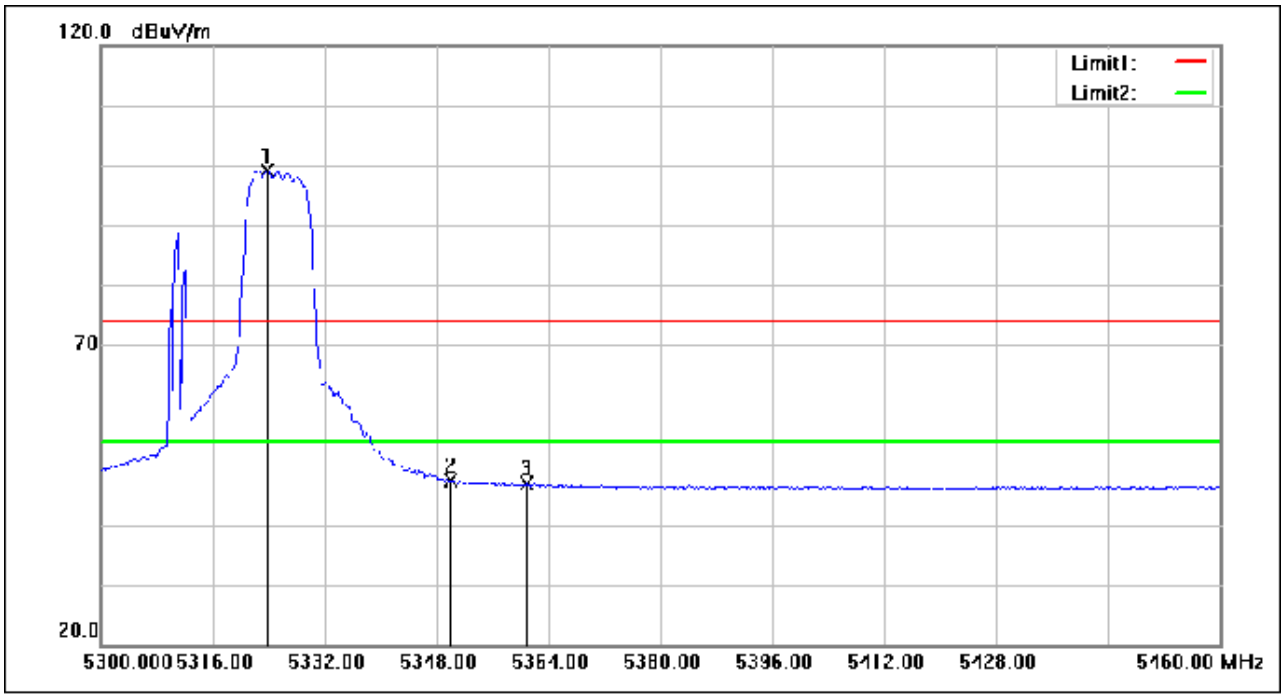


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.680	114.60	-15.47	99.13	54.00	45.13	AVG
2	5350.000	62.81	-15.49	47.32	54.00	-6.68	AVG
3	5360.800	62.29	-15.47	46.82	54.00	-7.18	AVG

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

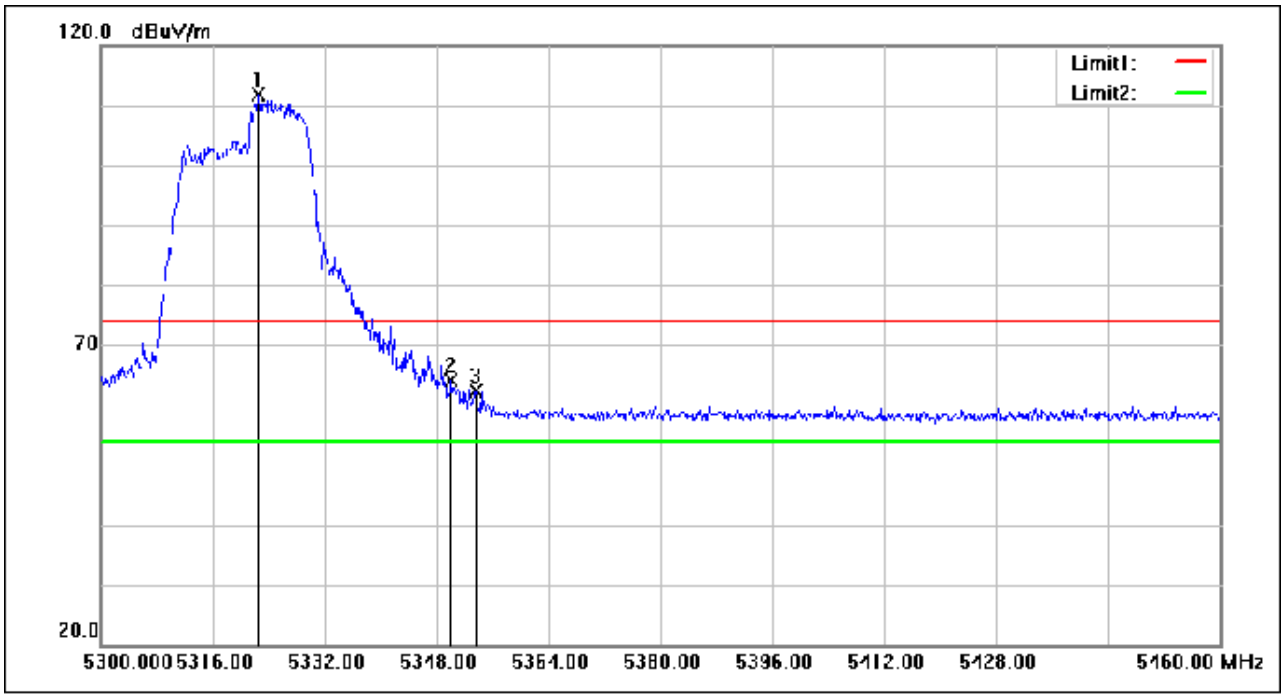


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.560	127.23	-15.47	111.76	74.00	37.76	peak
2	5350.000	79.73	-15.49	64.24	74.00	-9.76	peak
3	5353.600	77.91	-15.49	62.42	74.00	-11.58	peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

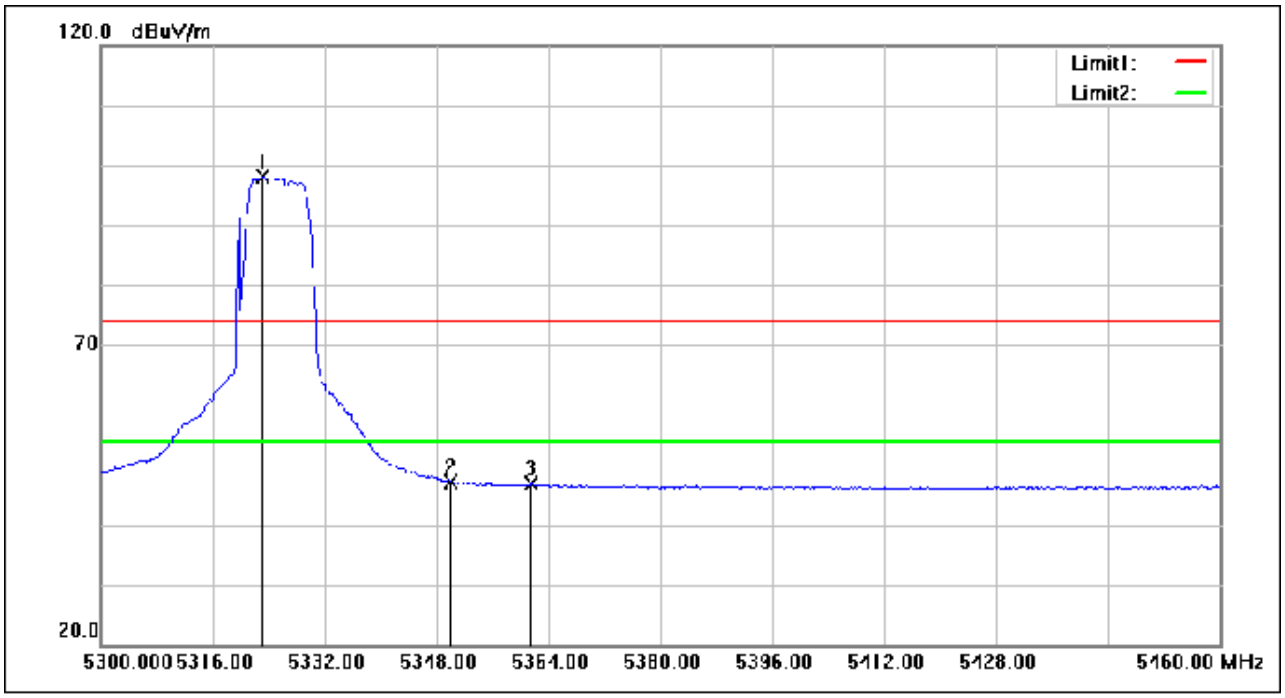


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.040	113.60	-15.47	98.13	54.00	44.13	AVG
2	5350.000	62.74	-15.49	47.25	54.00	-6.75	AVG
3	5361.600	62.34	-15.47	46.87	54.00	-7.13	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

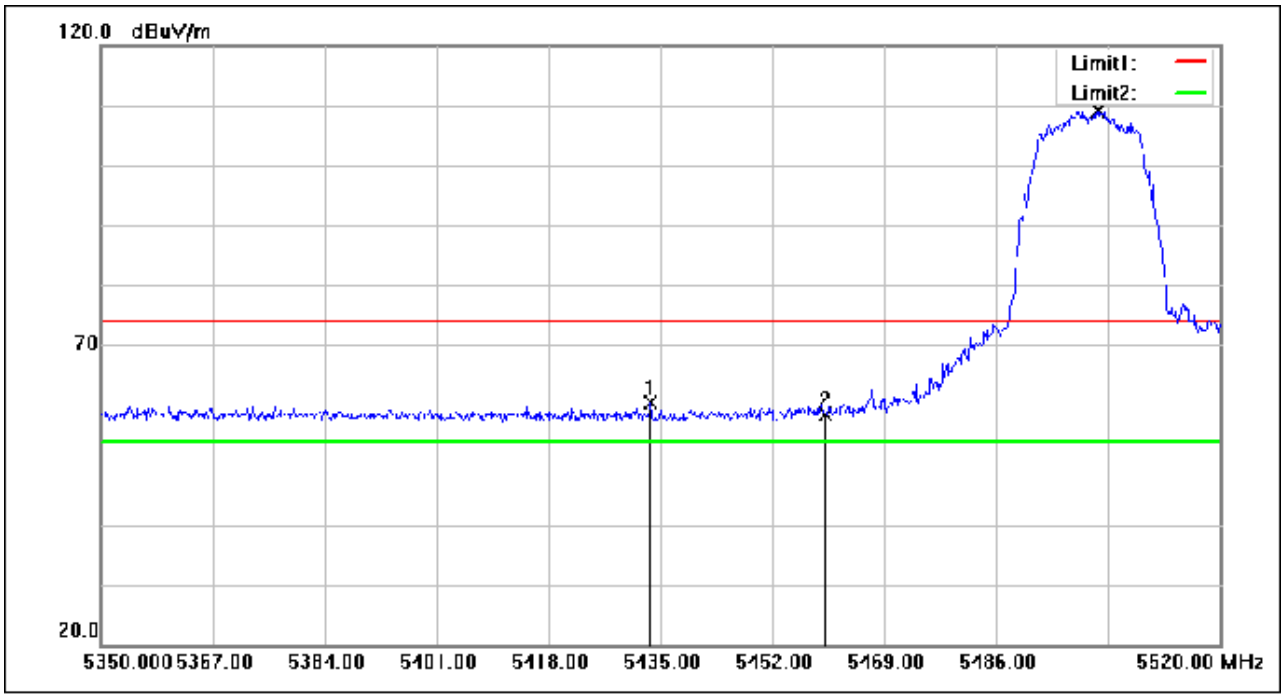


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.470	75.68	-15.34	60.34	74.00	-13.66	peak
2	5460.000	73.71	-15.30	58.41	74.00	-15.59	peak
3	5501.470	124.30	-15.25	109.05	74.00	35.05	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

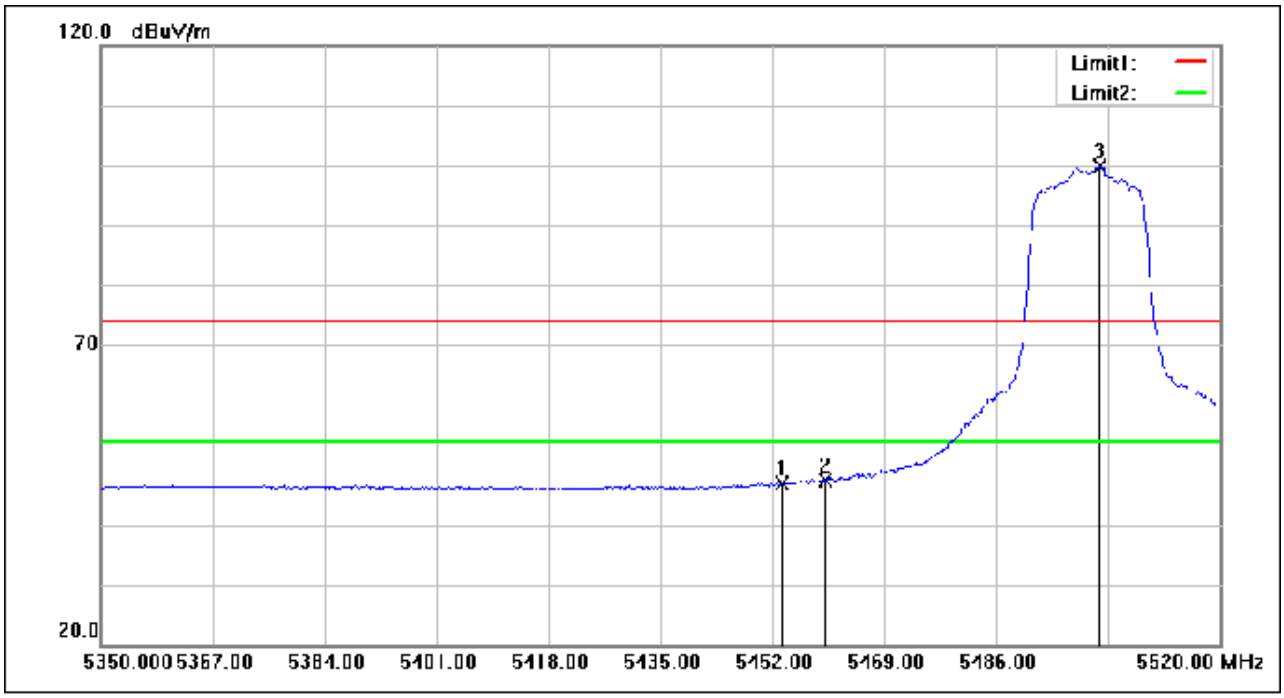


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.360	62.27	-15.30	46.97	54.00	-7.03	AVG
2	5460.000	62.71	-15.30	47.41	54.00	-6.59	AVG
3	5501.810	115.17	-15.25	99.92	54.00	45.92	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

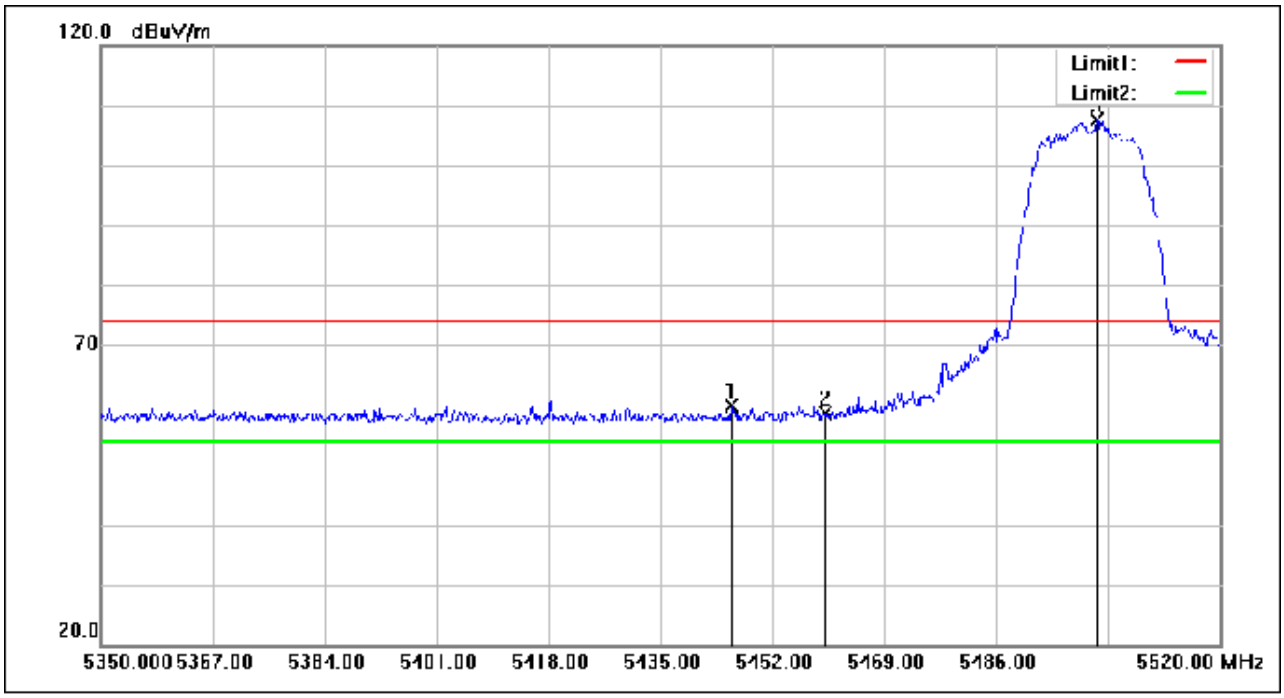


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.710	75.16	-15.32	59.84	74.00	-14.16	peak
2	5460.000	73.87	-15.30	58.57	74.00	-15.43	peak
3	5501.300	122.79	-15.25	107.54	74.00	33.54	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

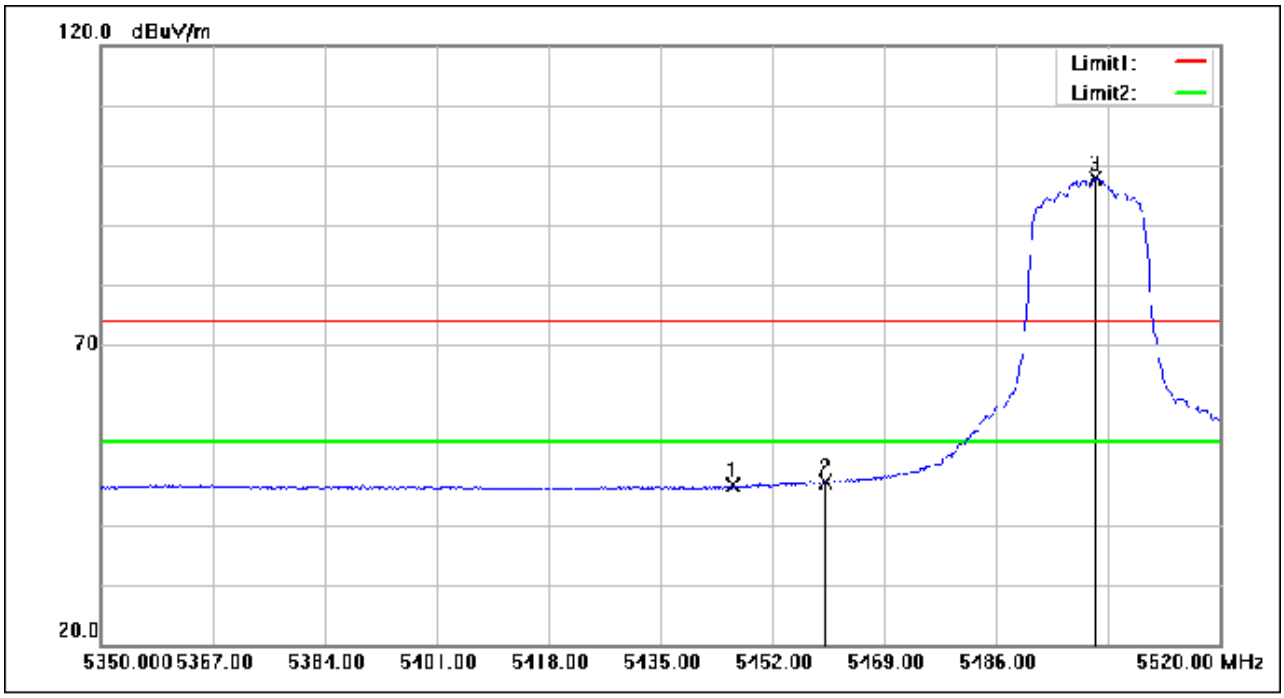


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.050	61.87	-15.32	46.55	54.00	-7.45	AVG
2	5460.000	62.50	-15.30	47.20	54.00	-6.80	AVG
3	5501.130	113.12	-15.25	97.87	54.00	43.87	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

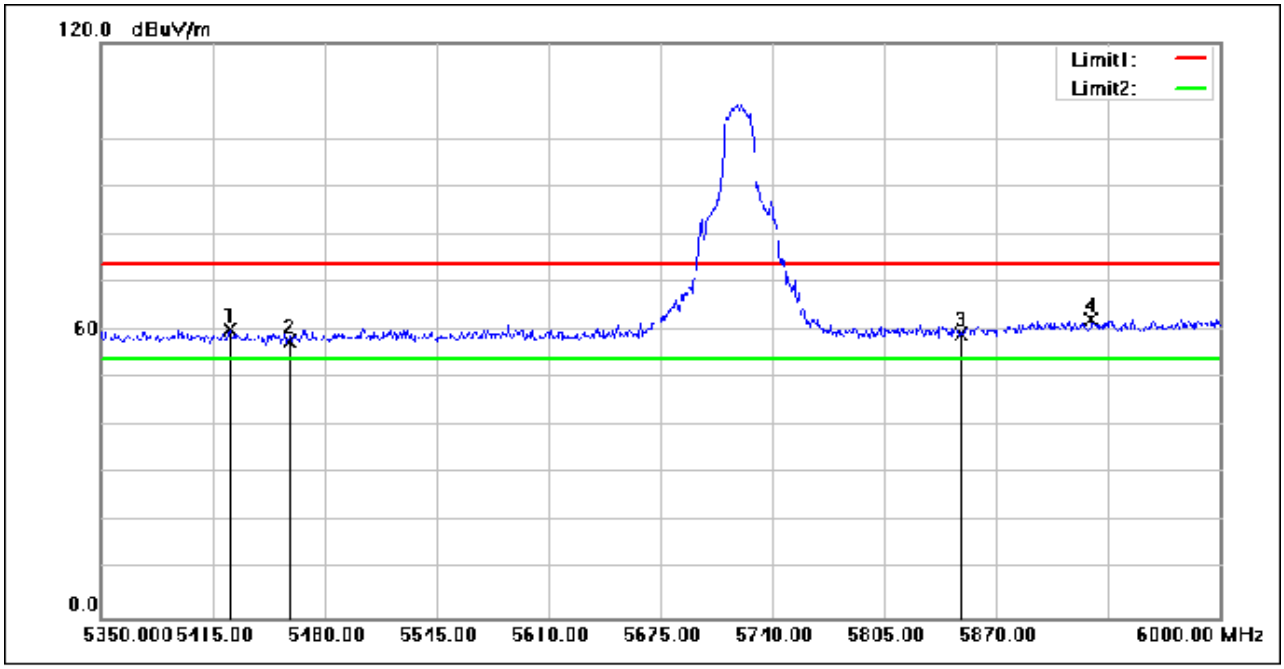


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.750	75.49	-15.36	60.13	74.00	-13.87	peak
2	5460.000	73.18	-15.30	57.88	74.00	-16.12	peak
3	5850.000	73.40	-14.03	59.37	74.00	-14.63	peak
4	5925.250	75.88	-13.55	62.33	74.00	-11.67	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

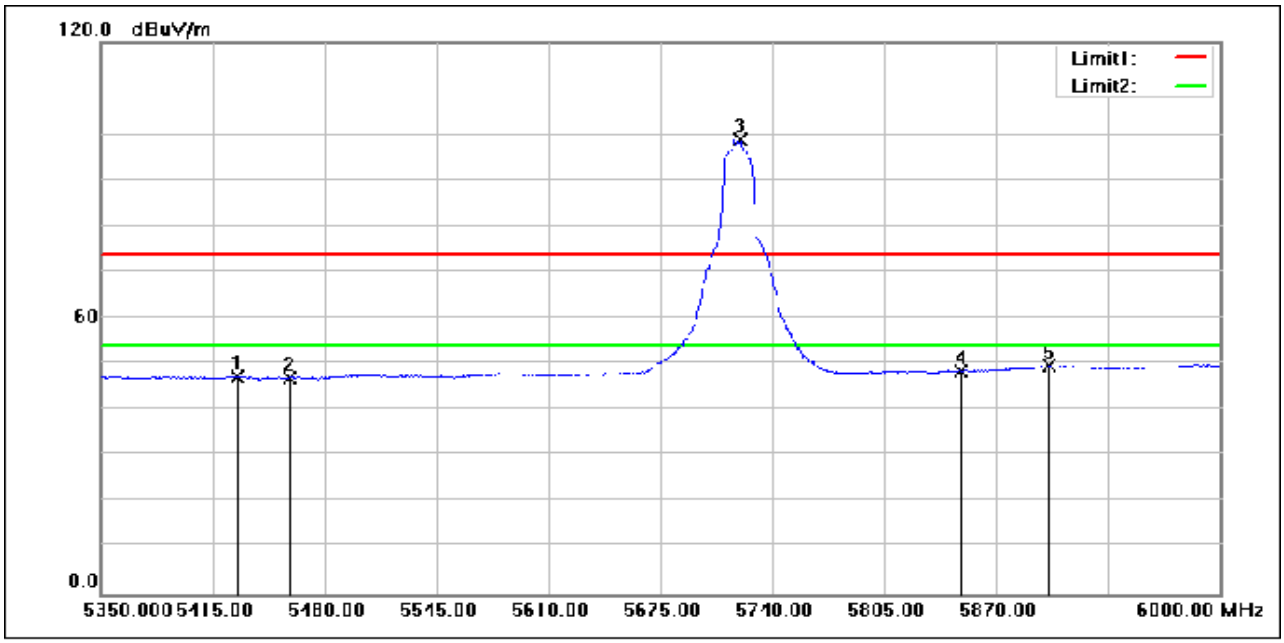


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.300	62.73	-15.35	47.38	54.00	-6.62	AVG
2	5460.000	62.24	-15.30	46.94	54.00	-7.06	AVG
3	5721.150	113.50	-14.60	98.90	54.00	44.90	AVG
4	5850.000	62.55	-14.03	48.52	54.00	-5.48	AVG
5	5900.550	63.34	-13.71	49.63	54.00	-4.37	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

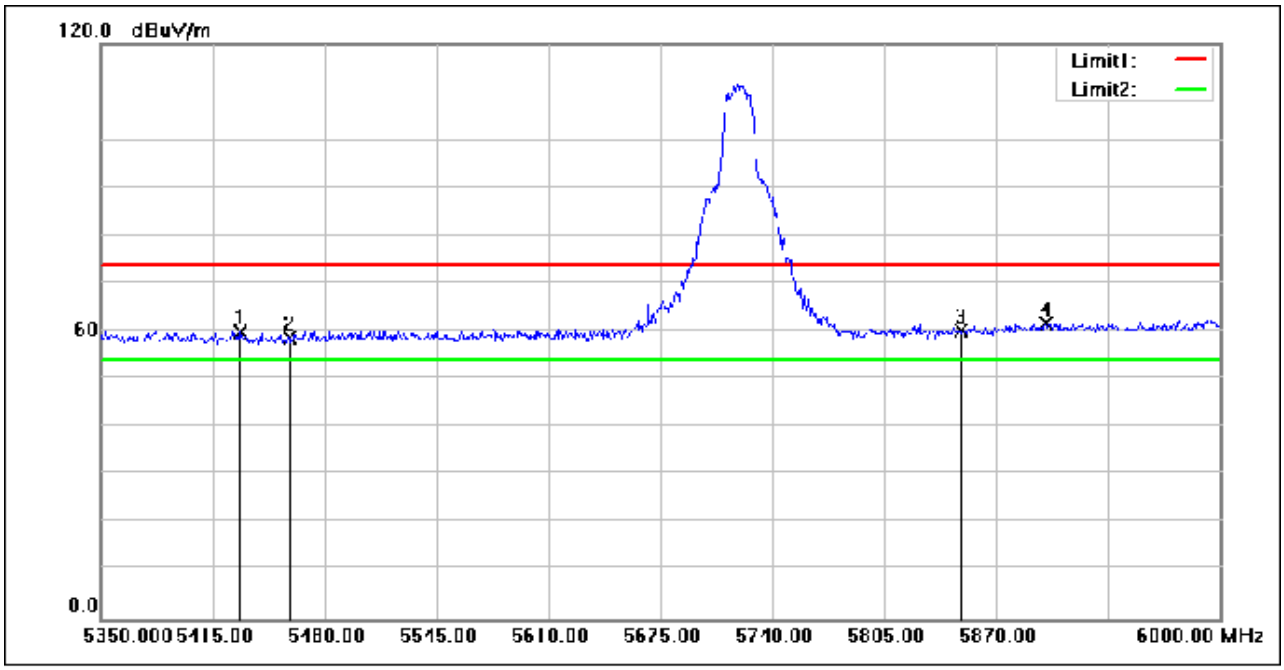


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.600	75.16	-15.34	59.82	74.00	-14.18	peak
2	5460.000	73.94	-15.30	58.64	74.00	-15.36	peak
3	5850.000	74.12	-14.03	60.09	74.00	-13.91	peak
4	5898.600	75.38	-13.72	61.66	74.00	-12.34	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

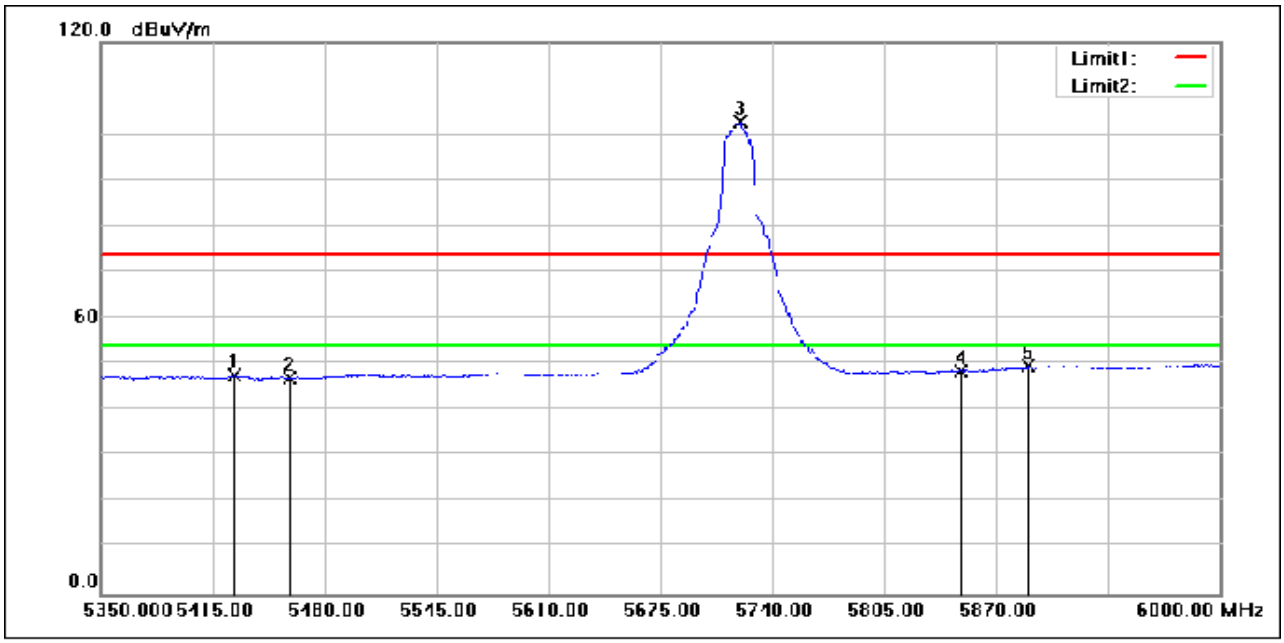


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5427.350	62.85	-15.36	47.49	74.00	-26.51	peak
2	5460.000	62.23	-15.30	46.93	54.00	-7.07	AVG
3	5721.150	117.37	-14.60	102.77	54.00	48.77	AVG
4	5850.000	62.56	-14.03	48.53	54.00	-5.47	AVG
5	5888.850	63.35	-13.79	49.56	54.00	-4.44	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

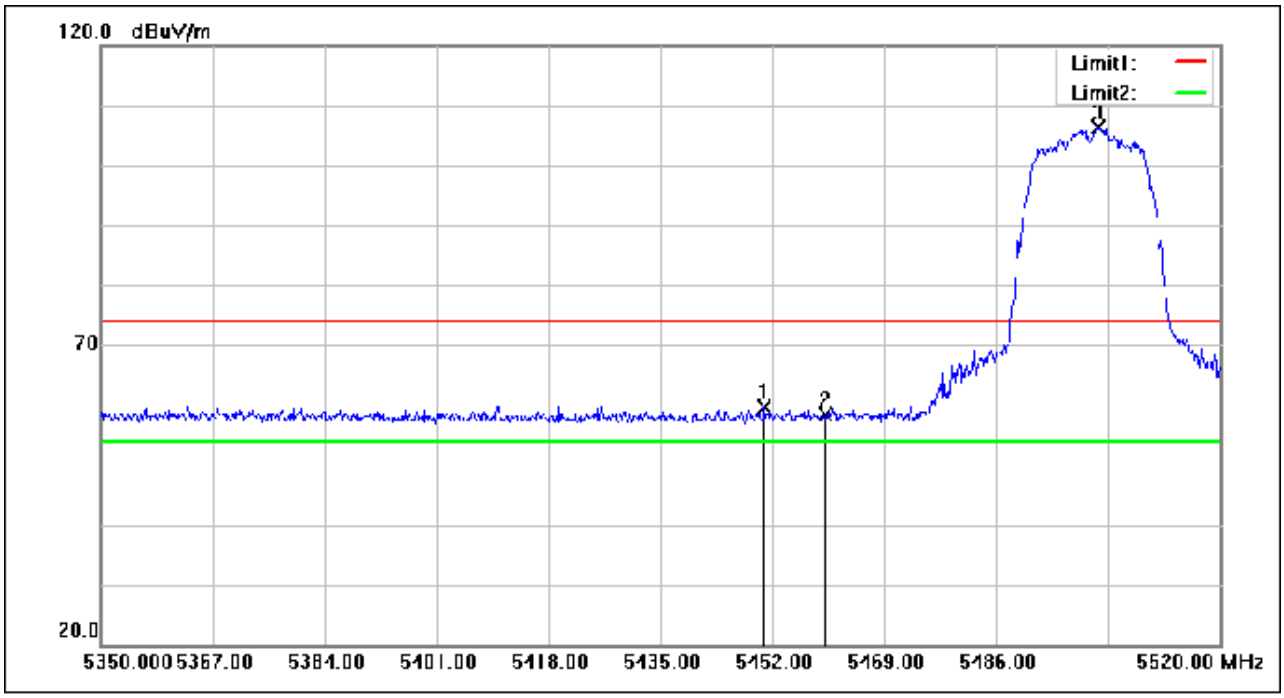


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.810	74.83	-15.31	59.52	74.00	-14.48	peak
2	5460.000	73.57	-15.30	58.27	74.00	-15.73	peak
3	5501.470	121.71	-15.25	106.46	74.00	32.46	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

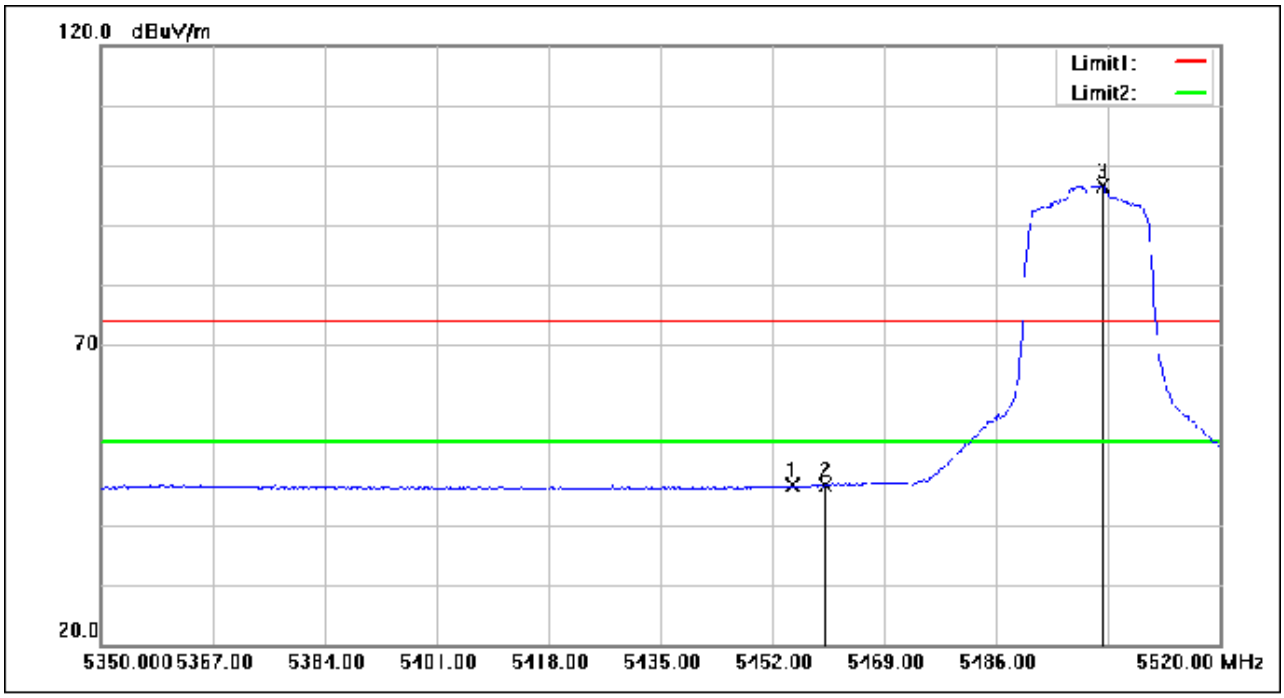


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.060	61.86	-15.30	46.56	54.00	-7.44	AVG
2	5460.000	61.97	-15.30	46.67	54.00	-7.33	AVG
3	5502.150	111.81	-15.25	96.56	54.00	42.56	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

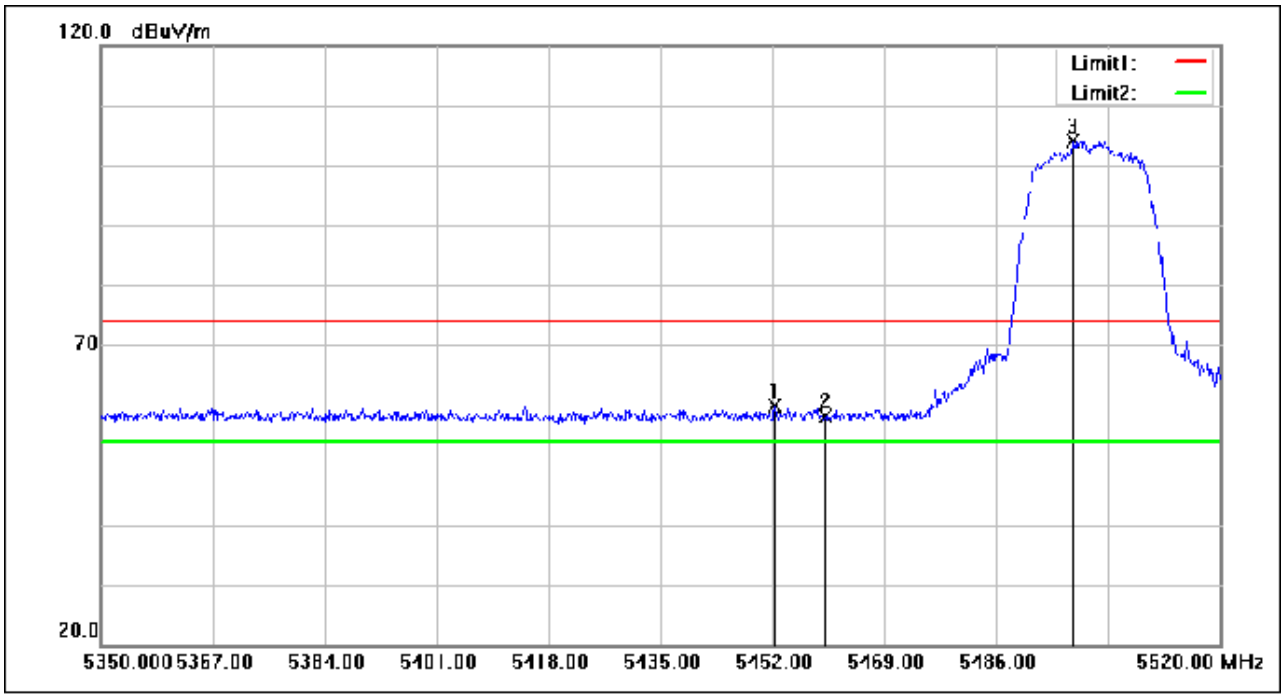


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.340	75.26	-15.30	59.96	74.00	-14.04	peak
2	5460.000	73.35	-15.30	58.05	74.00	-15.95	peak
3	5497.730	119.44	-15.25	104.19	74.00	30.19	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

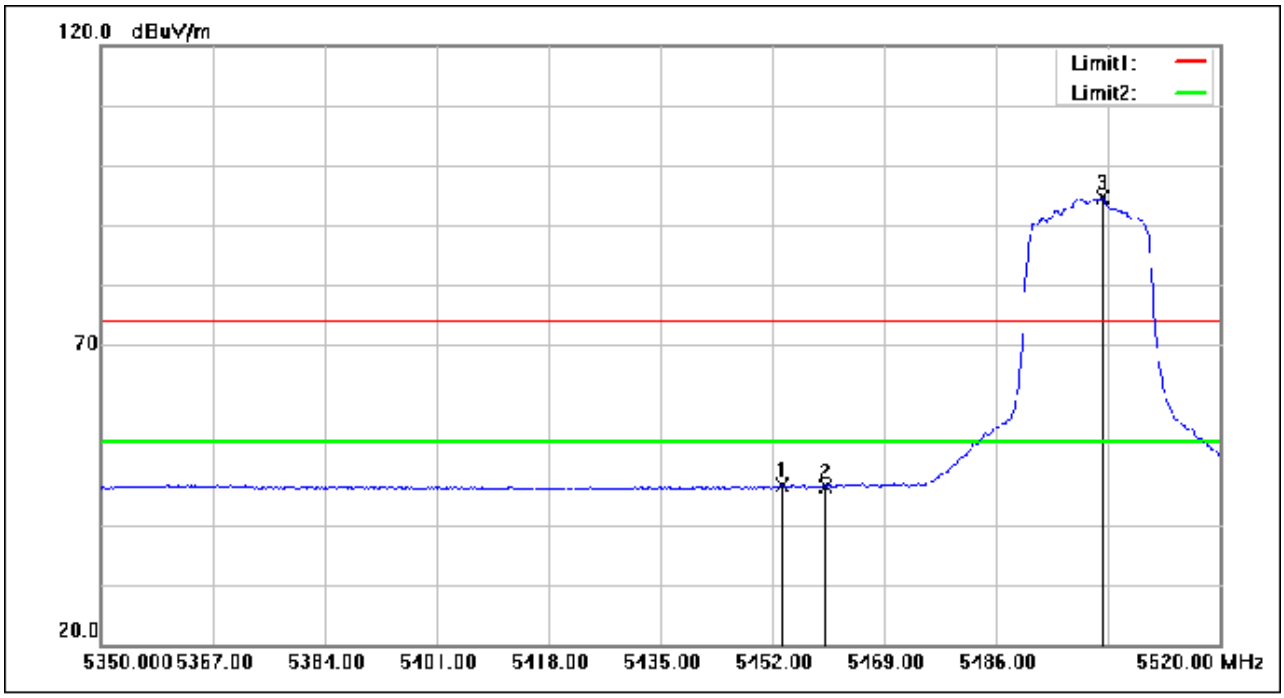


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.360	61.97	-15.30	46.67	54.00	-7.33	AVG
2	5460.000	61.71	-15.30	46.41	54.00	-7.59	AVG
3	5502.150	109.79	-15.25	94.54	54.00	40.54	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

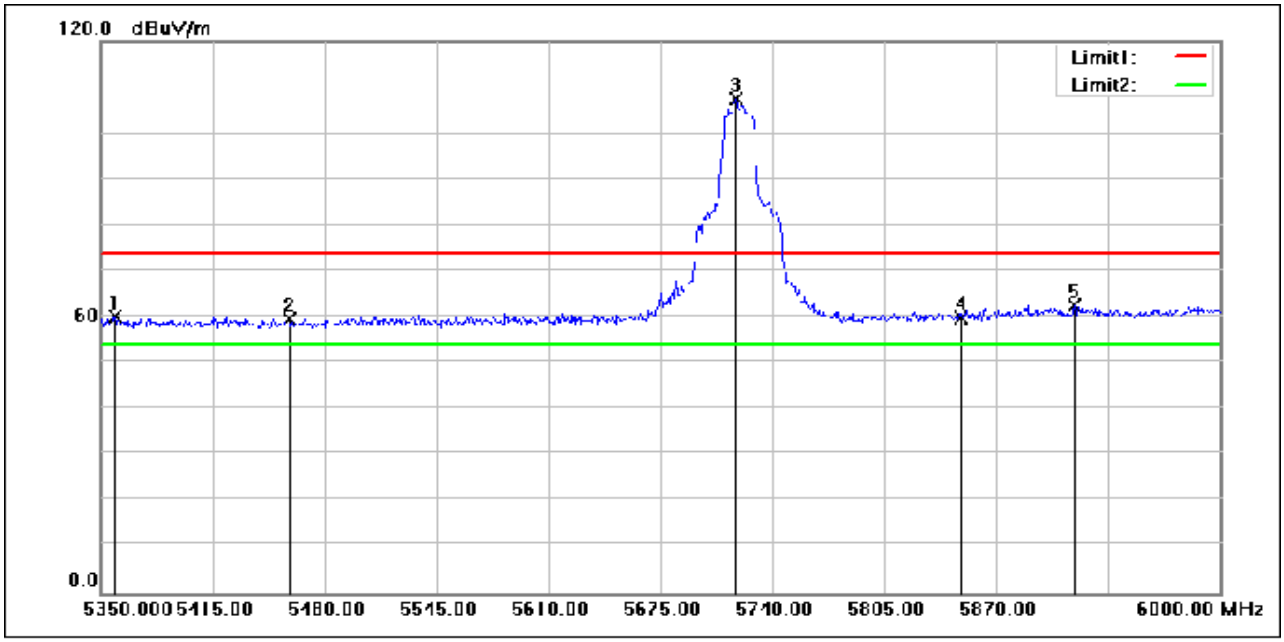


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5358.450	75.65	-15.47	60.18	74.00	-13.82	peak
2	5460.000	74.84	-15.30	59.54	74.00	-14.46	peak
3	5718.550	122.27	-14.61	107.66	74.00	33.66	peak
4	5850.000	74.01	-14.03	59.98	74.00	-14.02	peak
5	5915.500	76.13	-13.62	62.51	74.00	-11.49	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

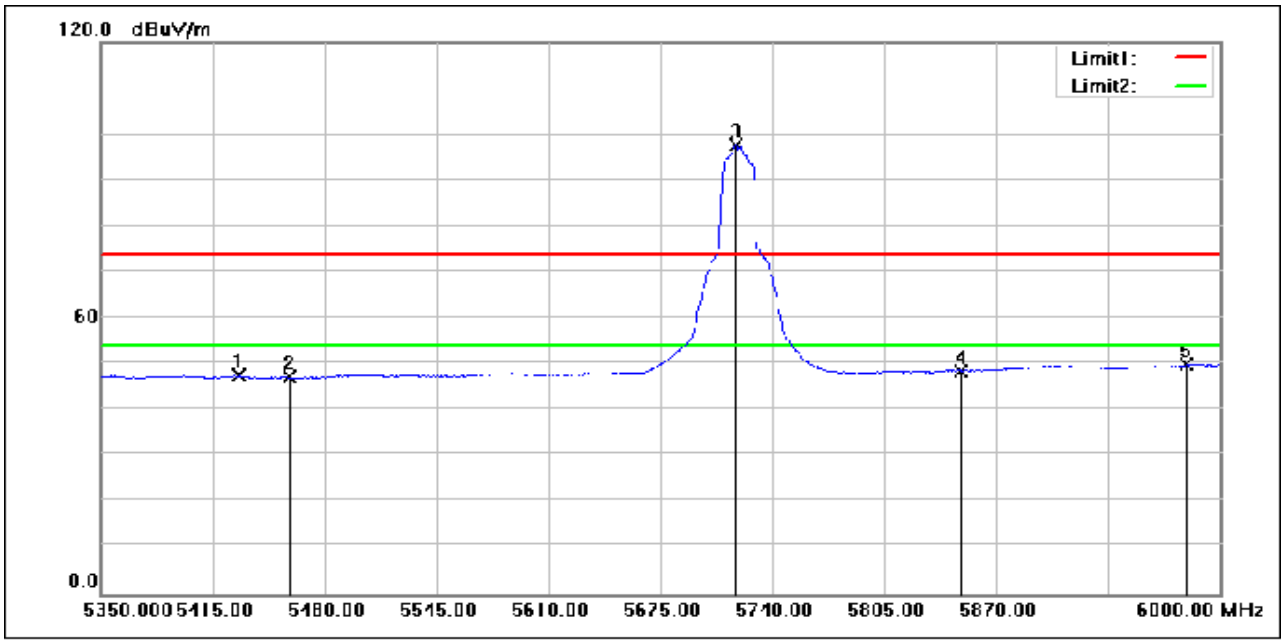


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.950	62.90	-15.35	47.55	54.00	-6.45	AVG
2	5460.000	62.41	-15.30	47.11	54.00	-6.89	AVG
3	5718.550	112.40	-14.61	97.79	54.00	43.79	AVG
4	5850.000	62.58	-14.03	48.55	54.00	-5.45	AVG
5	5980.500	63.02	-13.20	49.82	54.00	-4.18	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

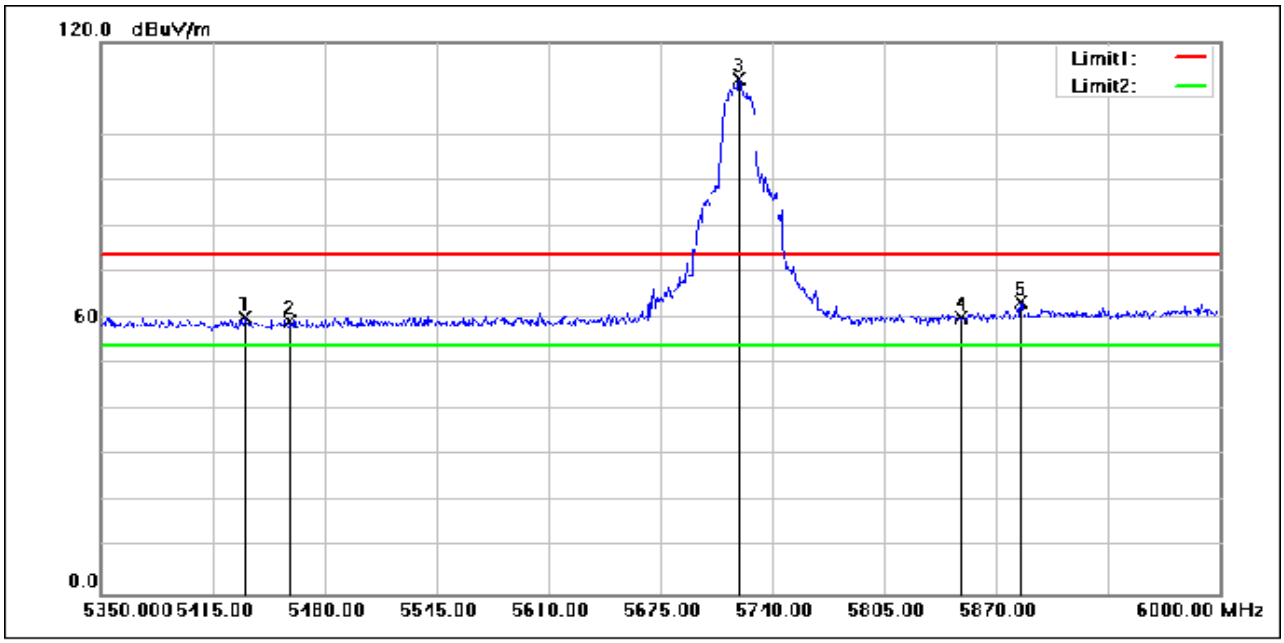


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.850	75.63	-15.34	60.29	74.00	-13.71	peak
2	5460.000	74.57	-15.30	59.27	74.00	-14.73	peak
3	5720.500	126.79	-14.60	112.19	74.00	38.19	peak
4	5850.000	74.08	-14.03	60.05	74.00	-13.95	peak
5	5884.300	77.16	-13.81	63.35	74.00	-10.65	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

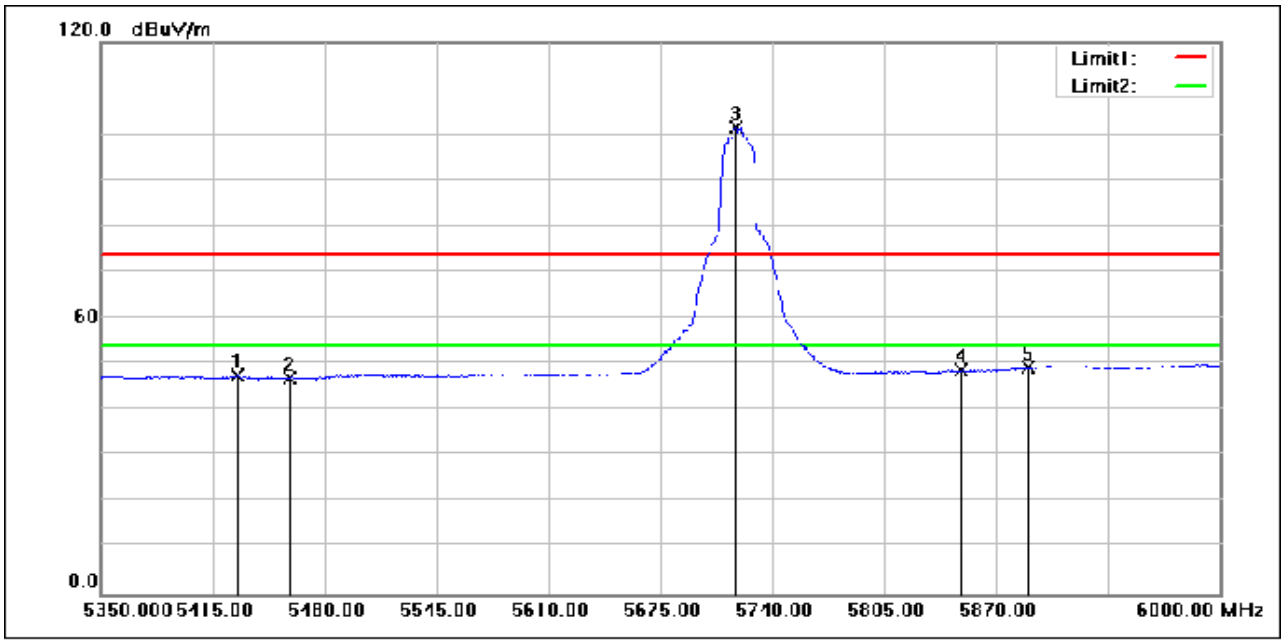


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.300	62.79	-15.35	47.44	54.00	-6.56	AVG
2	5460.000	62.25	-15.30	46.95	54.00	-7.05	AVG
3	5718.550	116.20	-14.61	101.59	54.00	47.59	AVG
4	5850.000	62.68	-14.03	48.65	54.00	-5.35	AVG
5	5888.850	63.07	-13.79	49.28	54.00	-4.72	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

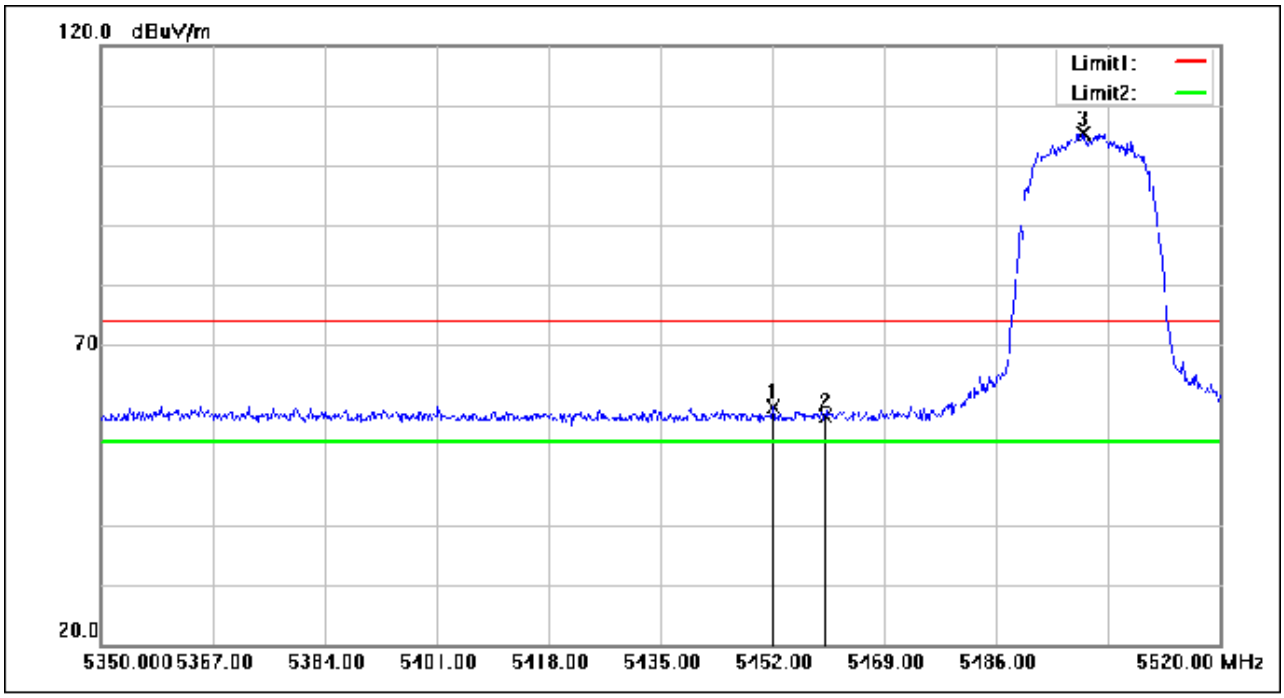


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.170	74.91	-15.30	59.61	74.00	-14.39	peak
2	5460.000	73.34	-15.30	58.04	74.00	-15.96	peak
3	5499.260	120.63	-15.25	105.38	74.00	31.38	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

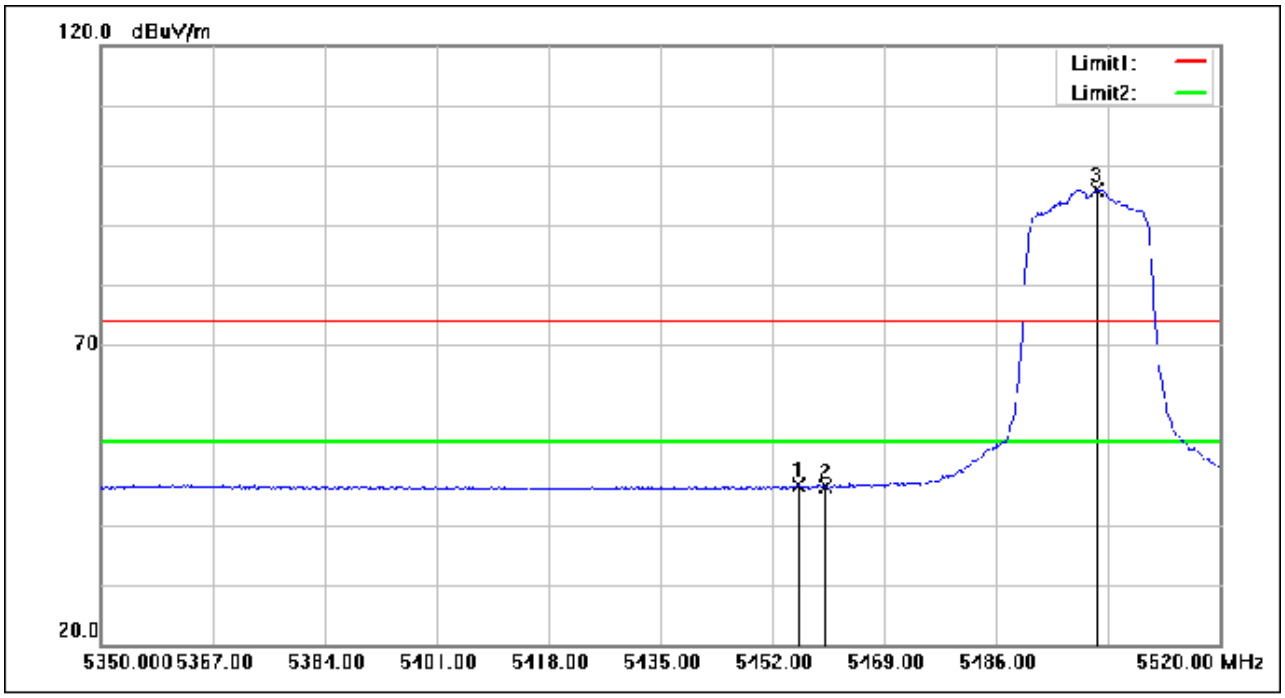


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.910	61.86	-15.30	46.56	54.00	-7.44	AVG
2	5460.000	61.56	-15.30	46.26	54.00	-7.74	AVG
3	5501.300	111.24	-15.25	95.99	54.00	41.99	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

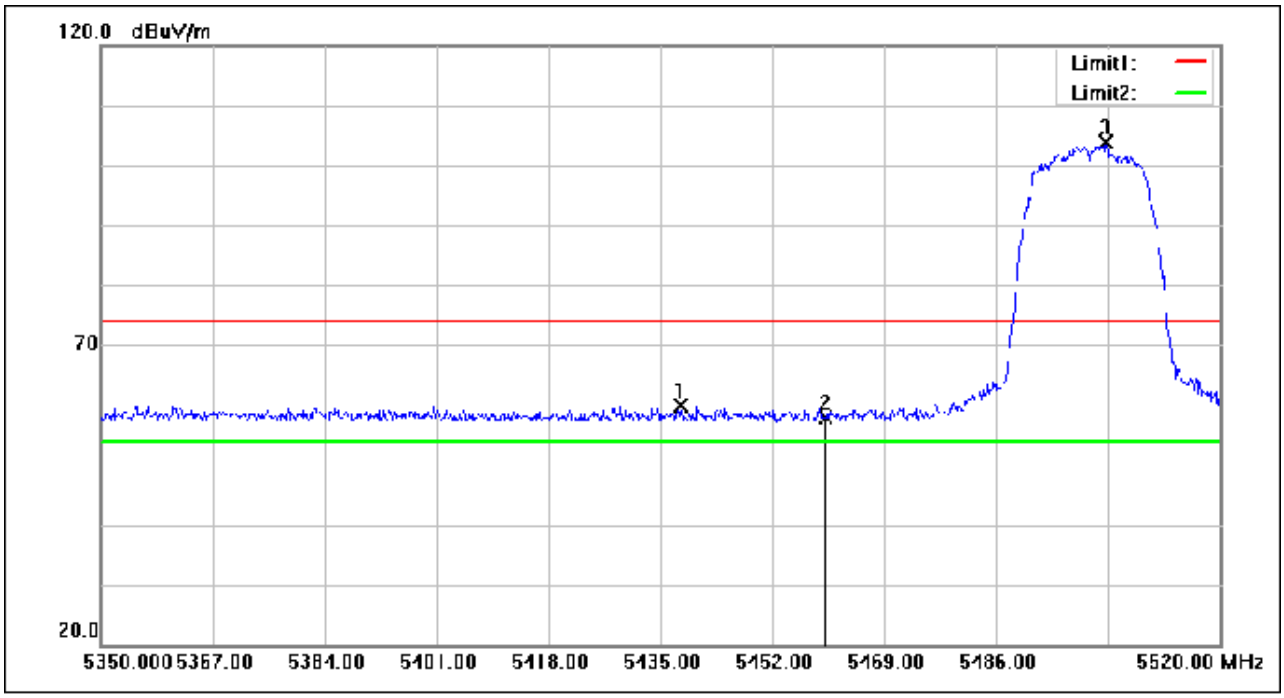


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5438.060	75.15	-15.34	59.81	74.00	-14.19	peak
2	5460.000	73.26	-15.30	57.96	74.00	-16.04	peak
3	5502.660	119.22	-15.24	103.98	74.00	29.98	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

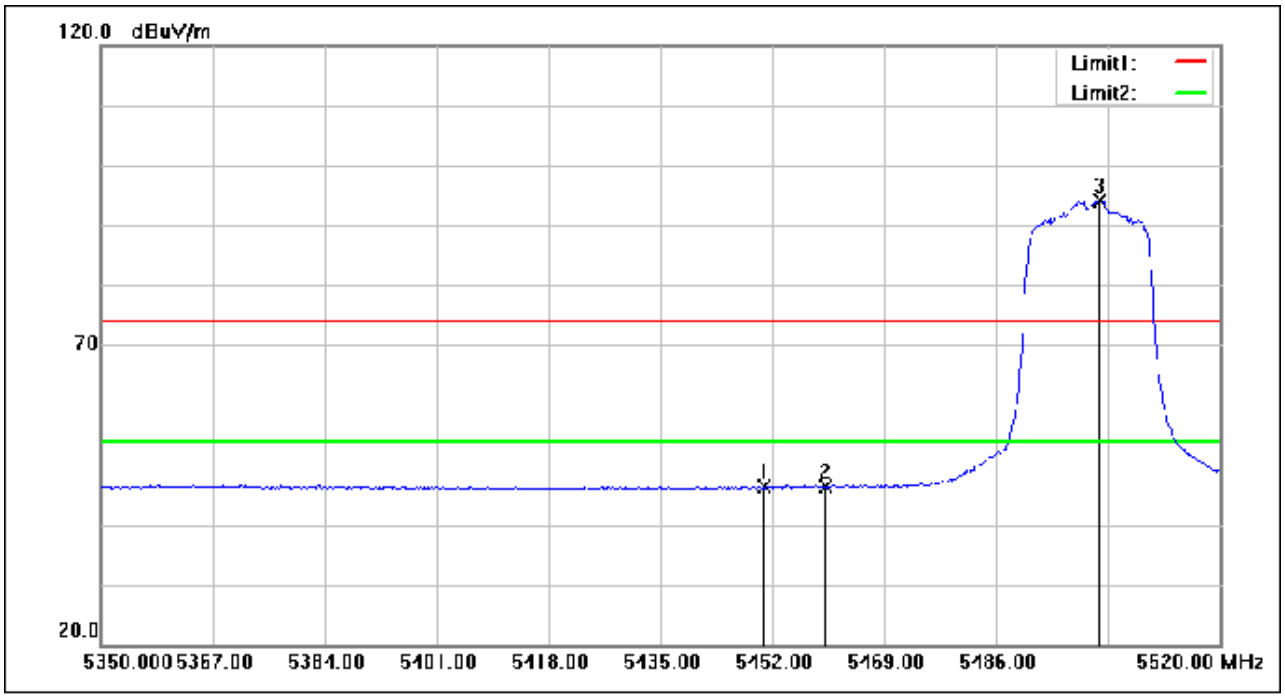


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.640	61.75	-15.32	46.43	54.00	-7.57	AVG
2	5460.000	61.58	-15.30	46.28	54.00	-7.72	AVG
3	5501.640	109.37	-15.25	94.12	54.00	40.12	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

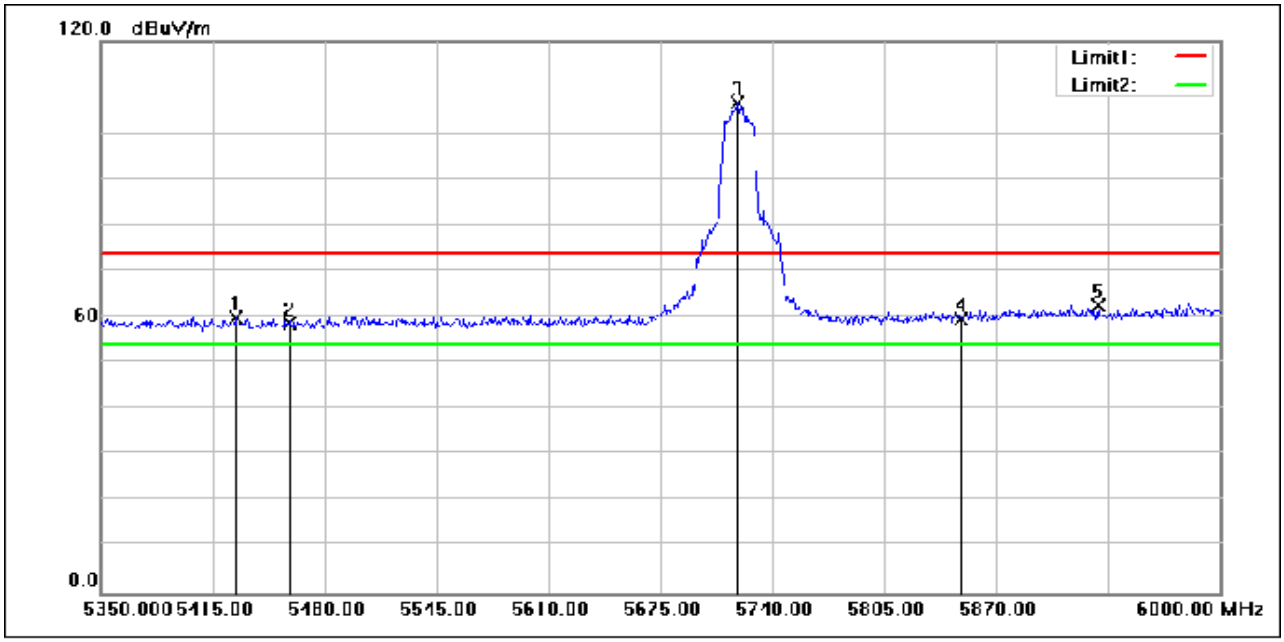


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5428.000	75.15	-15.36	59.79	74.00	-14.21	peak
2	5460.000	73.93	-15.30	58.63	74.00	-15.37	peak
3	5719.200	121.19	-14.61	106.58	74.00	32.58	peak
4	5850.000	73.53	-14.03	59.50	74.00	-14.50	peak
5	5929.150	76.10	-13.53	62.57	74.00	-11.43	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

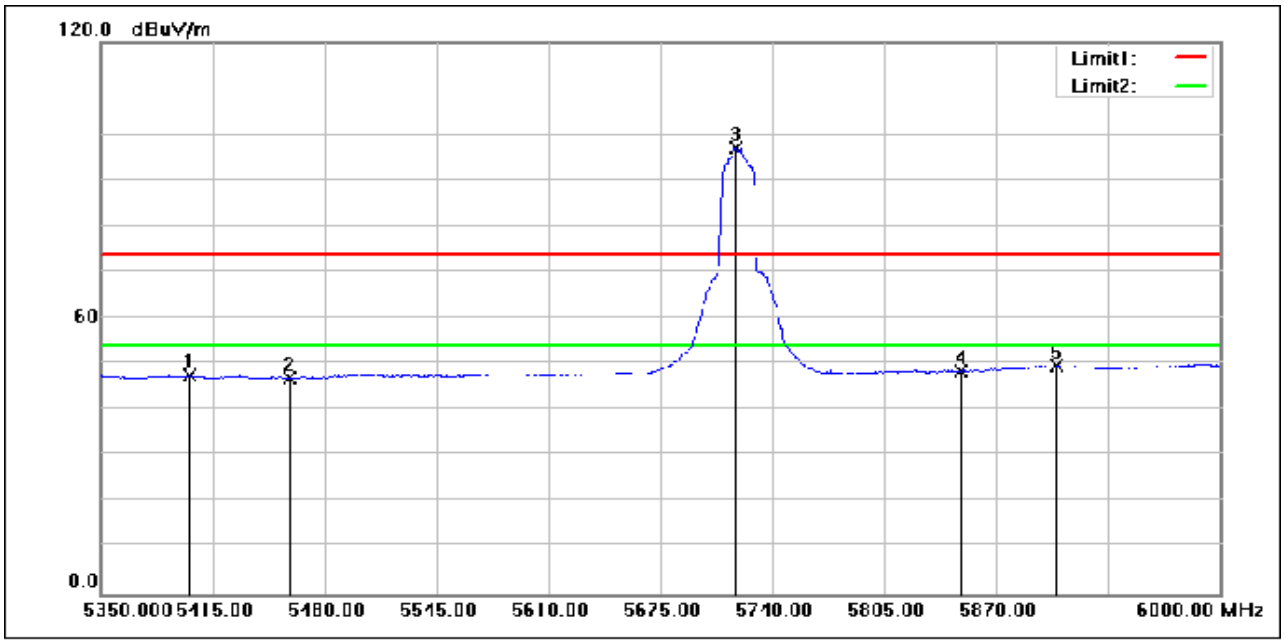


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5401.350	62.88	-15.40	47.48	54.00	-6.52	AVG
2	5460.000	62.29	-15.30	46.99	54.00	-7.01	AVG
3	5718.550	111.73	-14.61	97.12	54.00	43.12	AVG
4	5850.000	62.63	-14.03	48.60	54.00	-5.40	AVG
5	5905.100	63.39	-13.68	49.71	54.00	-4.29	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

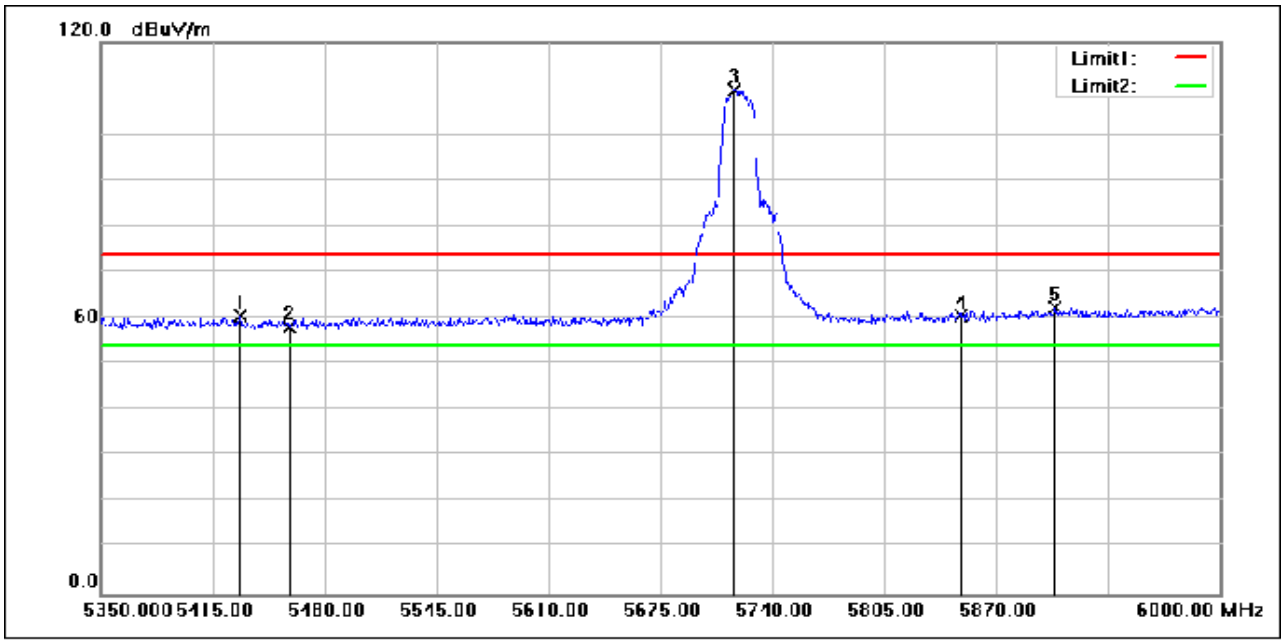


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.600	75.81	-15.34	60.47	74.00	-13.53	peak
2	5460.000	73.43	-15.30	58.13	74.00	-15.87	peak
3	5717.900	124.25	-14.61	109.64	74.00	35.64	peak
4	5850.000	74.50	-14.03	60.47	74.00	-13.53	peak
5	5903.800	76.02	-13.69	62.33	74.00	-11.67	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

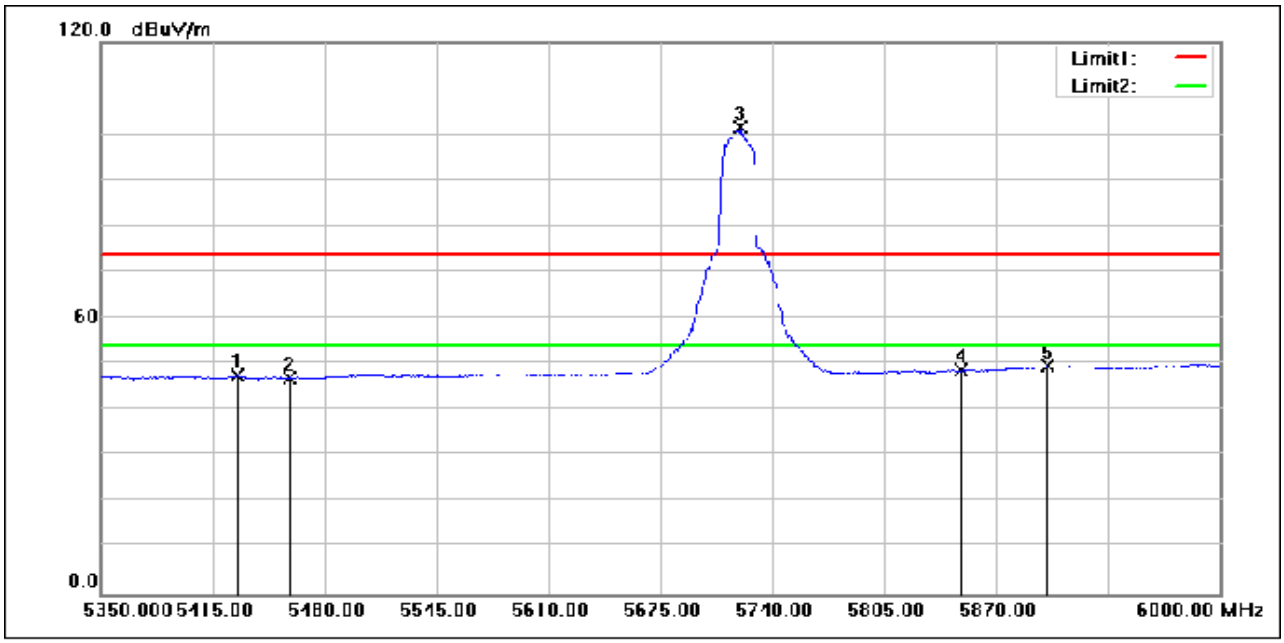


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.300	62.76	-15.35	47.41	54.00	-6.59	AVG
2	5460.000	62.26	-15.30	46.96	54.00	-7.04	AVG
3	5721.150	116.09	-14.60	101.49	54.00	47.49	AVG
4	5850.000	62.68	-14.03	48.65	54.00	-5.35	AVG
5	5899.900	63.32	-13.72	49.60	54.00	-4.40	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

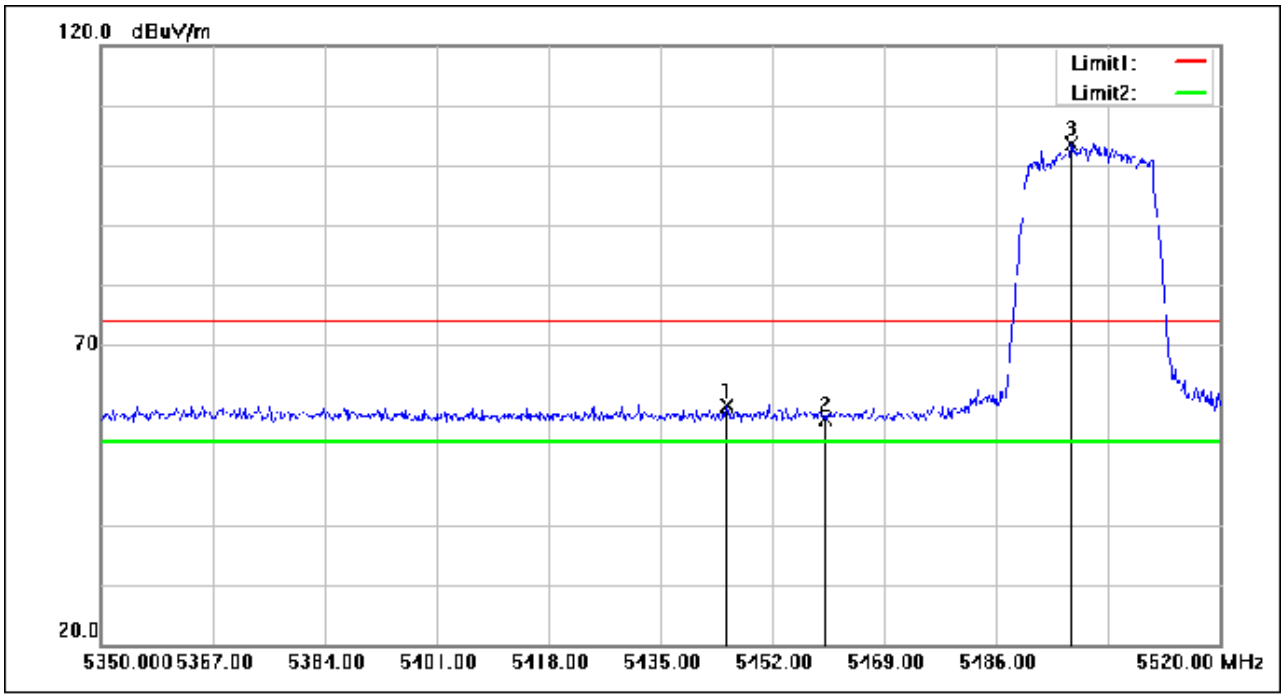


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.030	75.21	-15.32	59.89	74.00	-14.11	peak
2	5460.000	72.95	-15.30	57.65	74.00	-16.35	peak
3	5497.390	118.95	-15.25	103.70	74.00	29.70	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

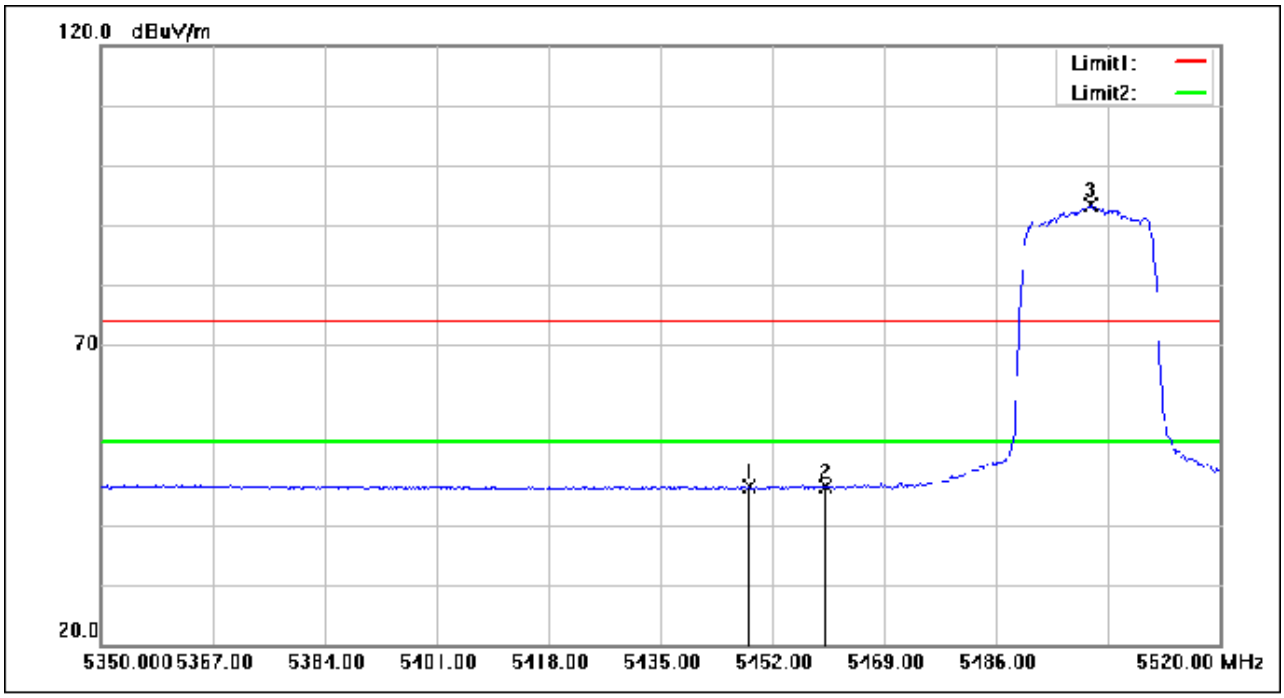


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.430	61.74	-15.32	46.42	54.00	-7.58	AVG
2	5460.000	61.58	-15.30	46.28	54.00	-7.72	AVG
3	5500.450	108.62	-15.25	93.37	54.00	39.37	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

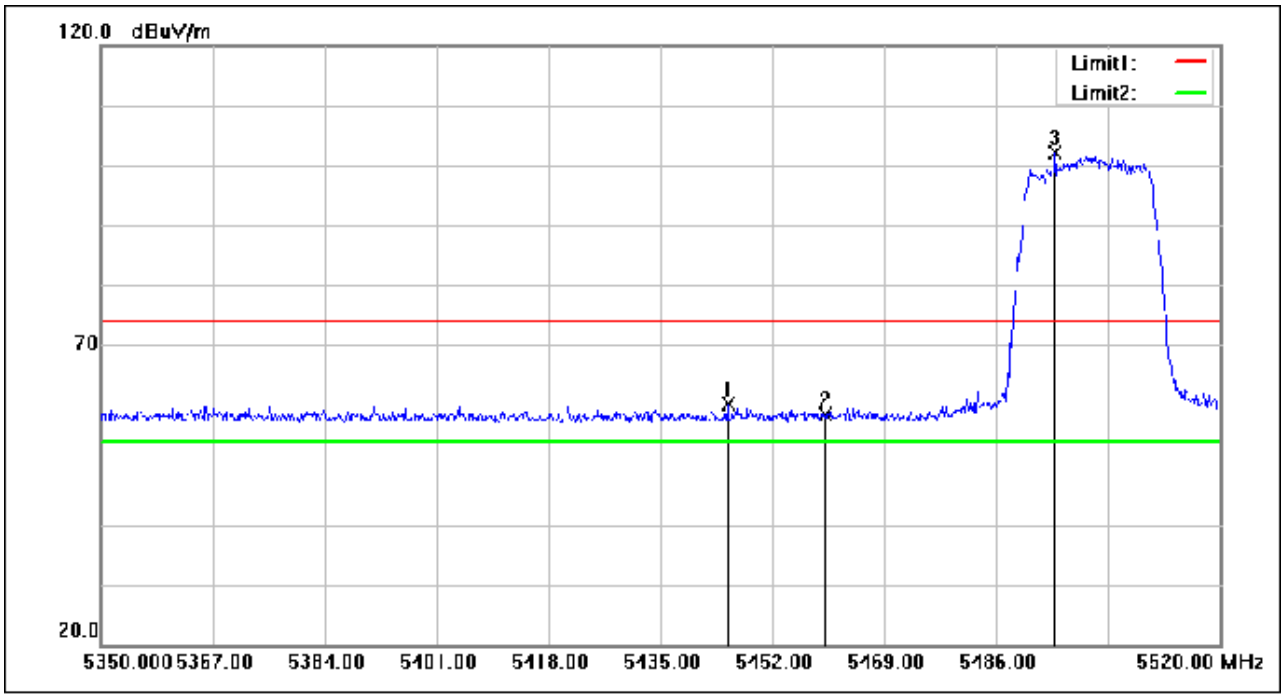


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.200	75.36	-15.32	60.04	74.00	-13.96	peak
2	5460.000	73.64	-15.30	58.34	74.00	-15.66	peak
3	5495.010	117.41	-15.25	102.16	74.00	28.16	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

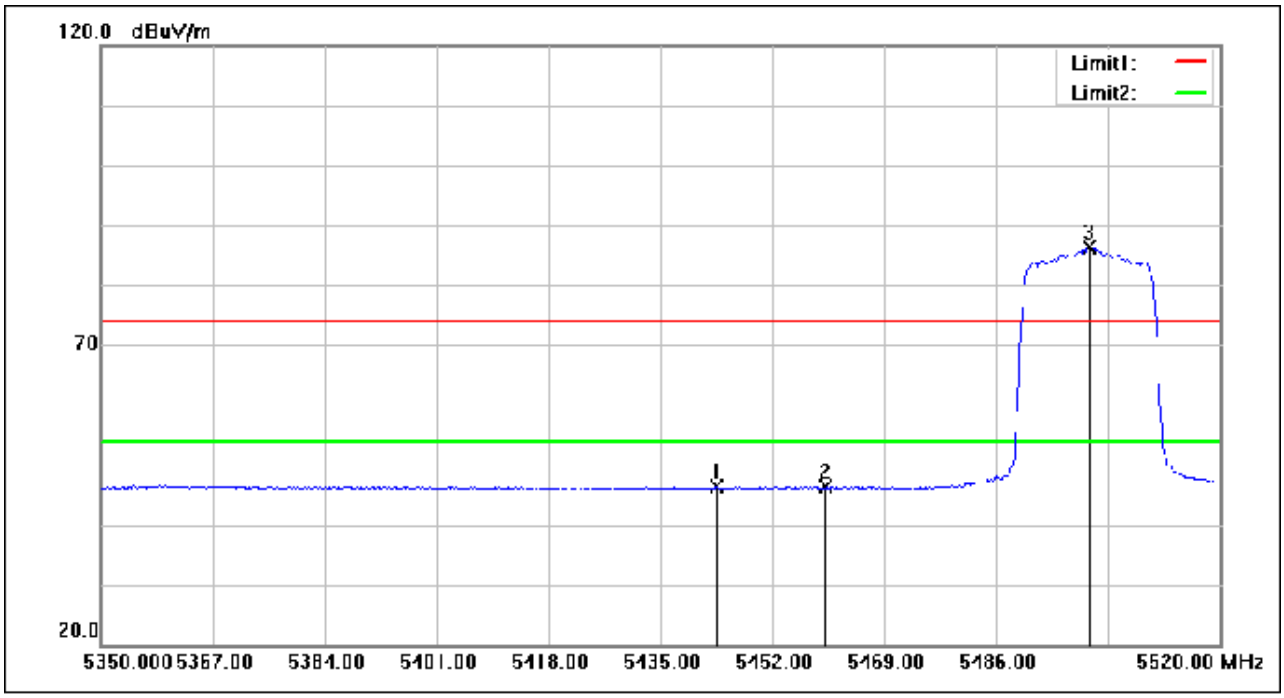


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.500	61.64	-15.32	46.32	54.00	-7.68	AVG
2	5460.000	61.59	-15.30	46.29	54.00	-7.71	AVG
3	5500.110	101.67	-15.25	86.42	54.00	32.42	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

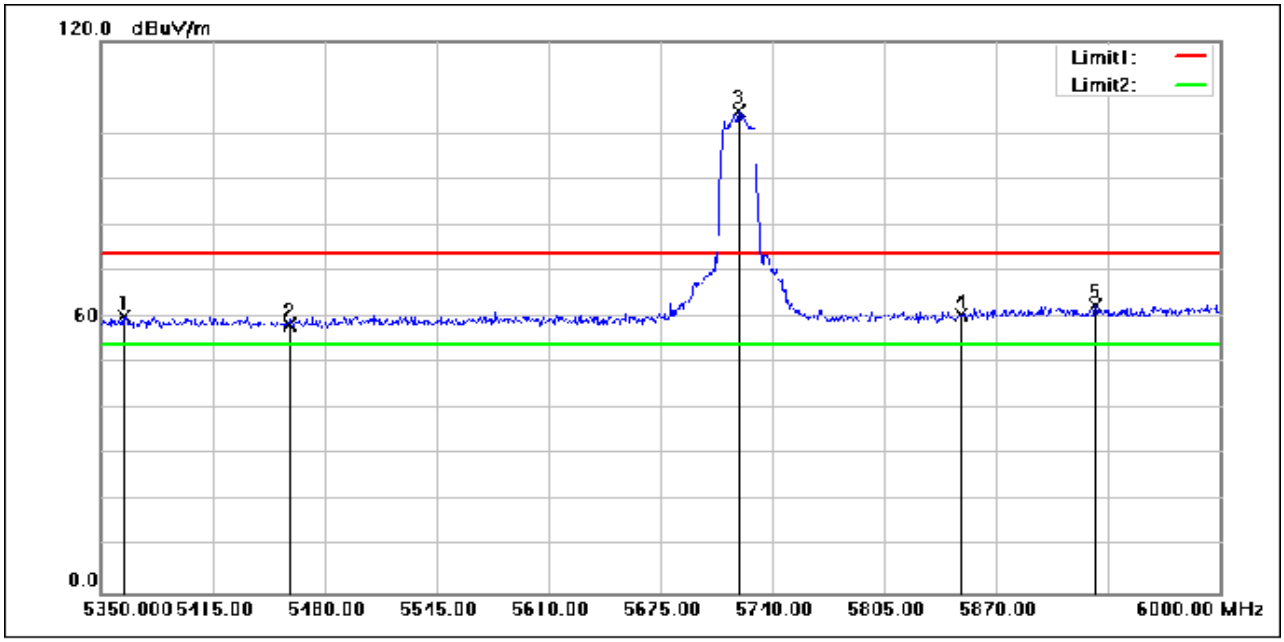


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5363.000	75.76	-15.47	60.29	74.00	-13.71	peak
2	5460.000	73.70	-15.30	58.40	74.00	-15.60	peak
3	5720.500	119.45	-14.60	104.85	74.00	30.85	peak
4	5850.000	74.61	-14.03	60.58	74.00	-13.42	peak
5	5927.200	76.12	-13.54	62.58	74.00	-11.42	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

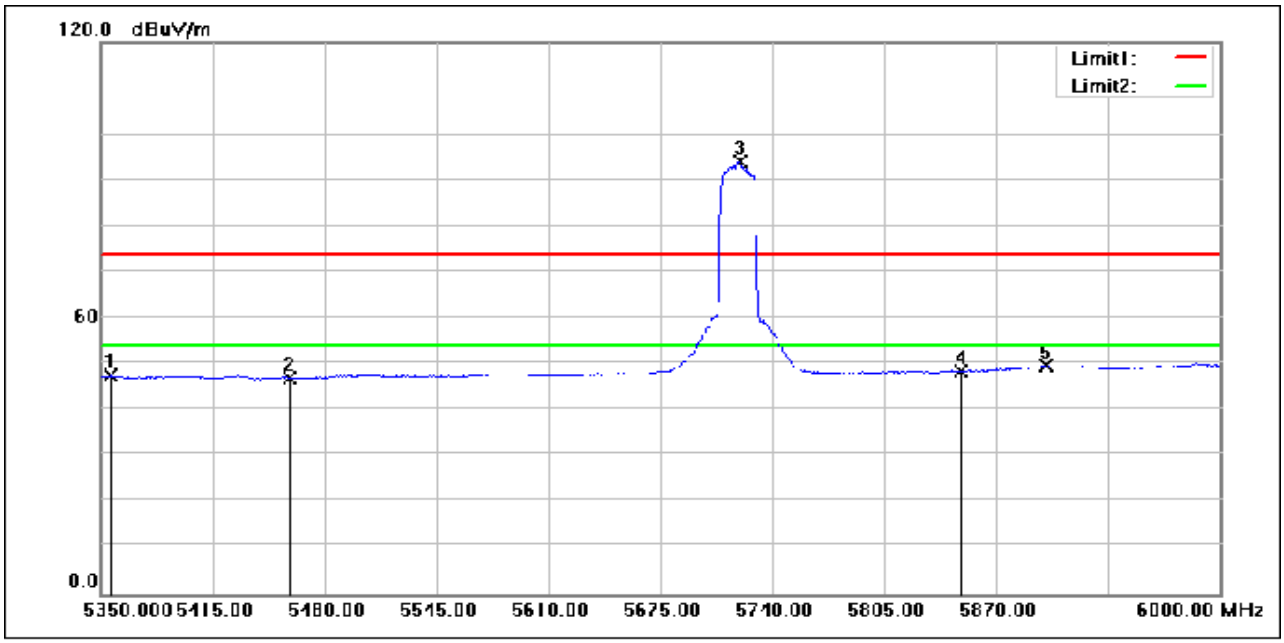


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5355.850	62.98	-15.49	47.49	54.00	-6.51	AVG
2	5460.000	62.25	-15.30	46.95	54.00	-7.05	AVG
3	5721.150	108.73	-14.60	94.13	54.00	40.13	AVG
4	5850.000	62.60	-14.03	48.57	54.00	-5.43	AVG
5	5899.250	63.39	-13.72	49.67	54.00	-4.33	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

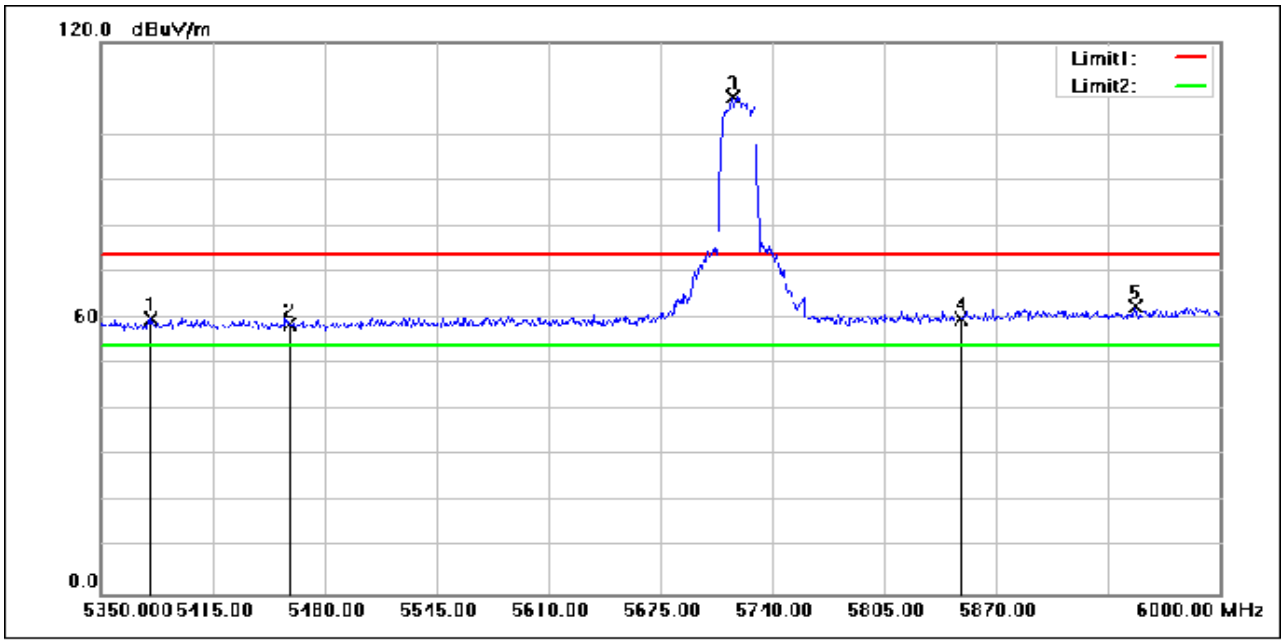


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5379.250	75.32	-15.44	59.88	74.00	-14.12	peak
2	5460.000	73.86	-15.30	58.56	74.00	-15.44	peak
3	5716.600	122.77	-14.61	108.16	74.00	34.16	peak
4	5850.000	73.96	-14.03	59.93	74.00	-14.07	peak
5	5950.600	75.83	-13.39	62.44	74.00	-11.56	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

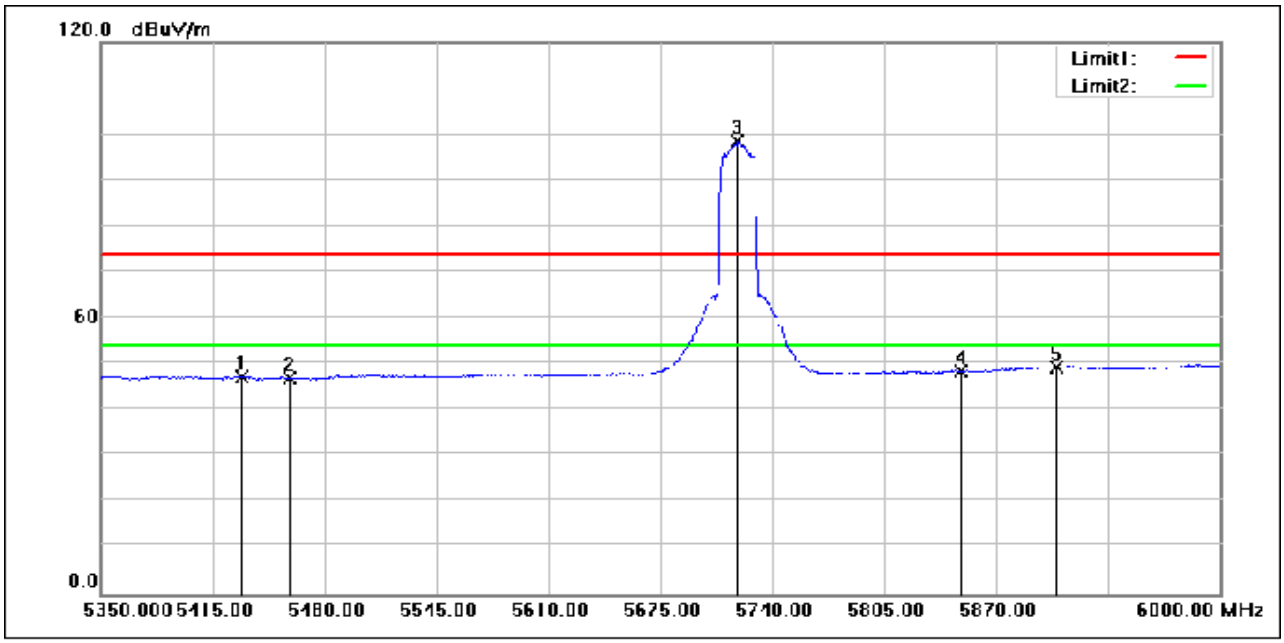


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.900	62.70	-15.34	47.36	54.00	-6.64	AVG
2	5460.000	62.21	-15.30	46.91	54.00	-7.09	AVG
3	5719.850	113.22	-14.60	98.62	54.00	44.62	AVG
4	5850.000	62.58	-14.03	48.55	54.00	-5.45	AVG
5	5905.100	63.17	-13.68	49.49	54.00	-4.51	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

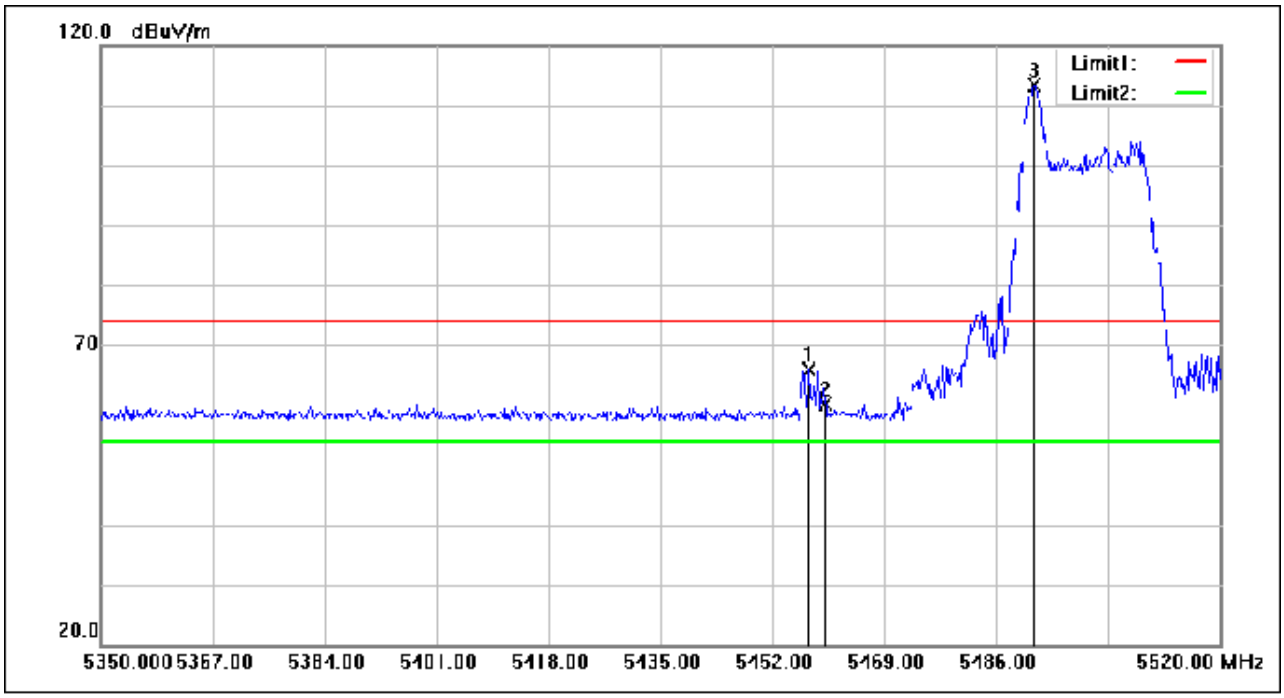


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.610	81.25	-15.30	65.95	74.00	-8.05	peak
2	5460.000	75.44	-15.30	60.14	74.00	-13.86	peak
3	5491.780	128.64	-15.26	113.38	74.00	39.38	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

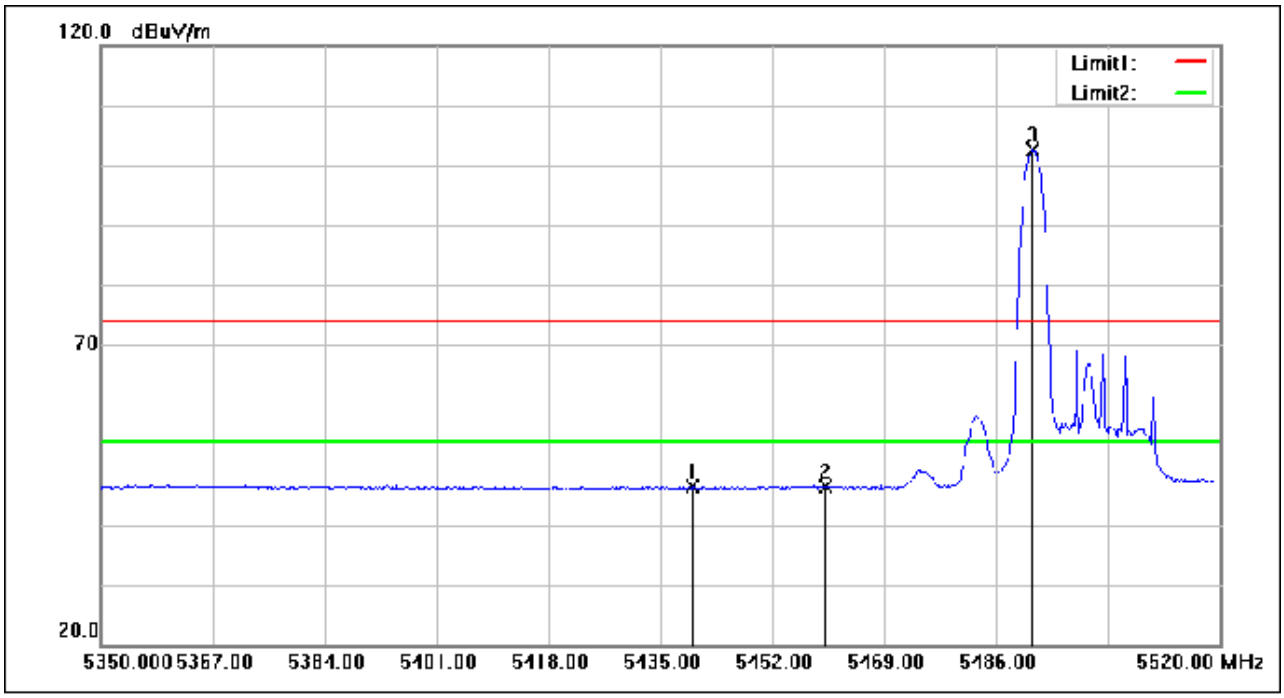


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5439.760	61.77	-15.34	46.43	54.00	-7.57	AVG
2	5460.000	61.71	-15.30	46.41	54.00	-7.59	AVG
3	5491.610	117.95	-15.26	102.69	54.00	48.69	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

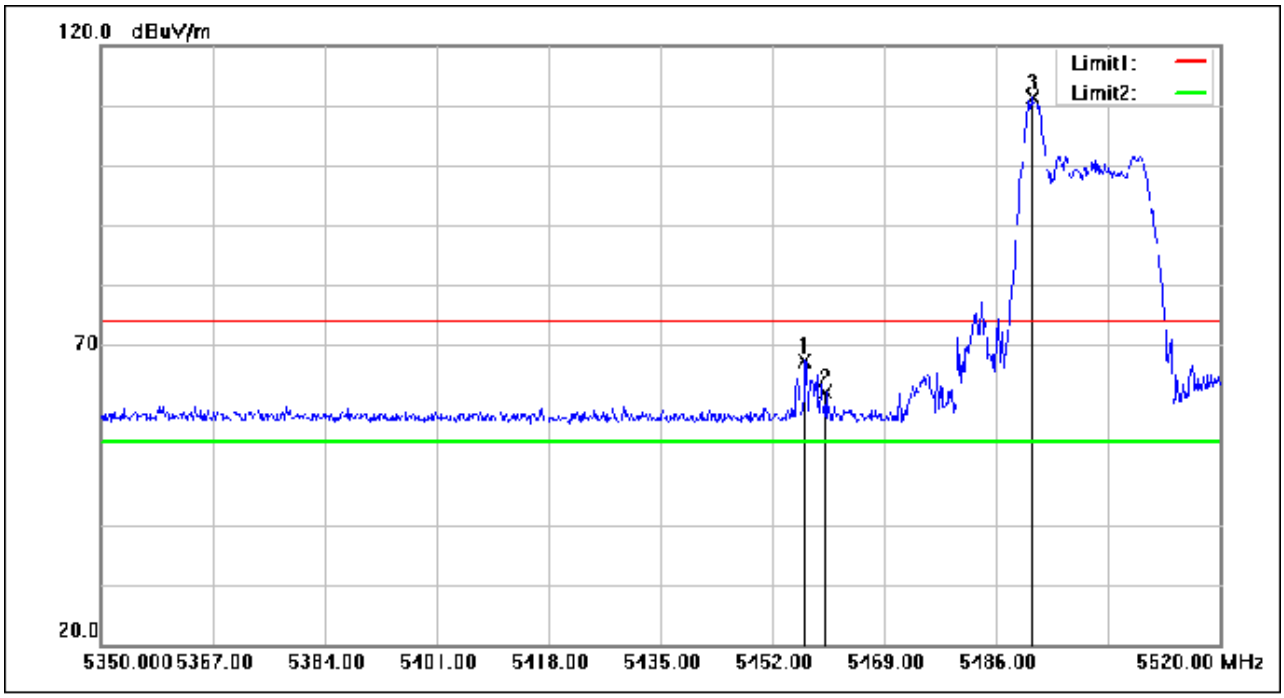


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.930	82.80	-15.30	67.50	74.00	-6.50	peak
2	5460.000	77.33	-15.30	62.03	74.00	-11.97	peak
3	5491.440	126.74	-15.26	111.48	74.00	37.48	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

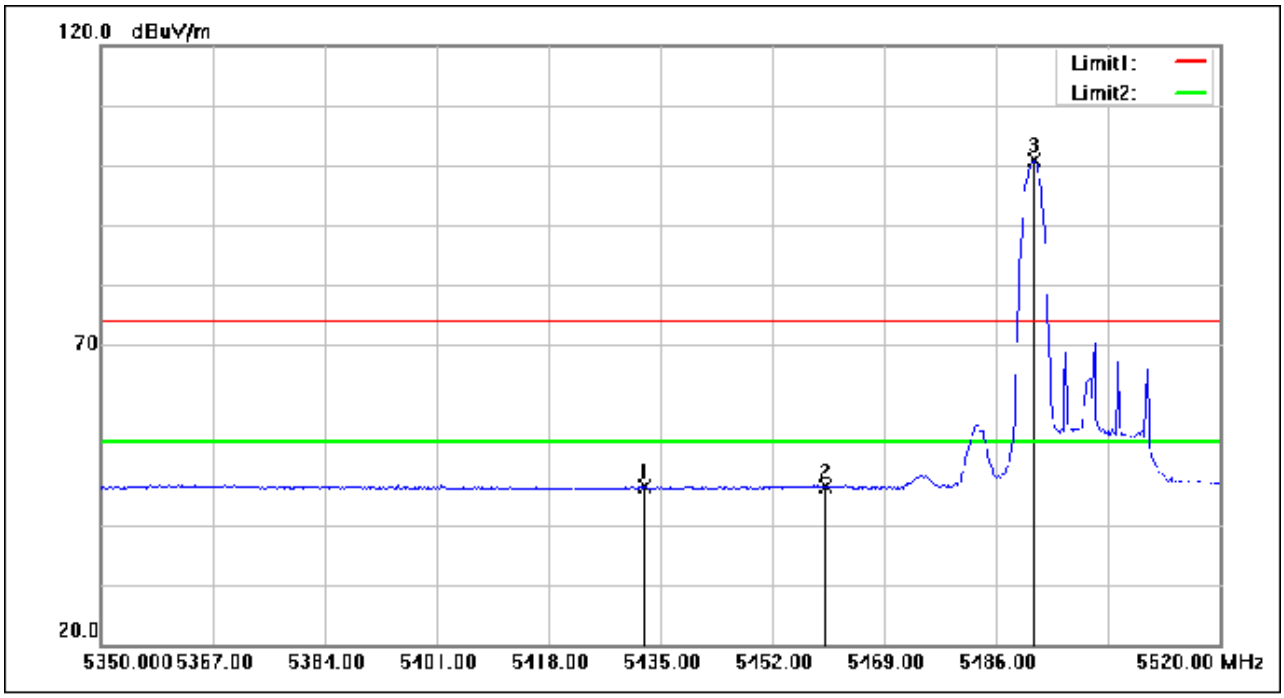


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.620	61.76	-15.34	46.42	54.00	-7.58	AVG
2	5460.000	61.73	-15.30	46.43	54.00	-7.57	AVG
3	5491.780	116.02	-15.26	100.76	54.00	46.76	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

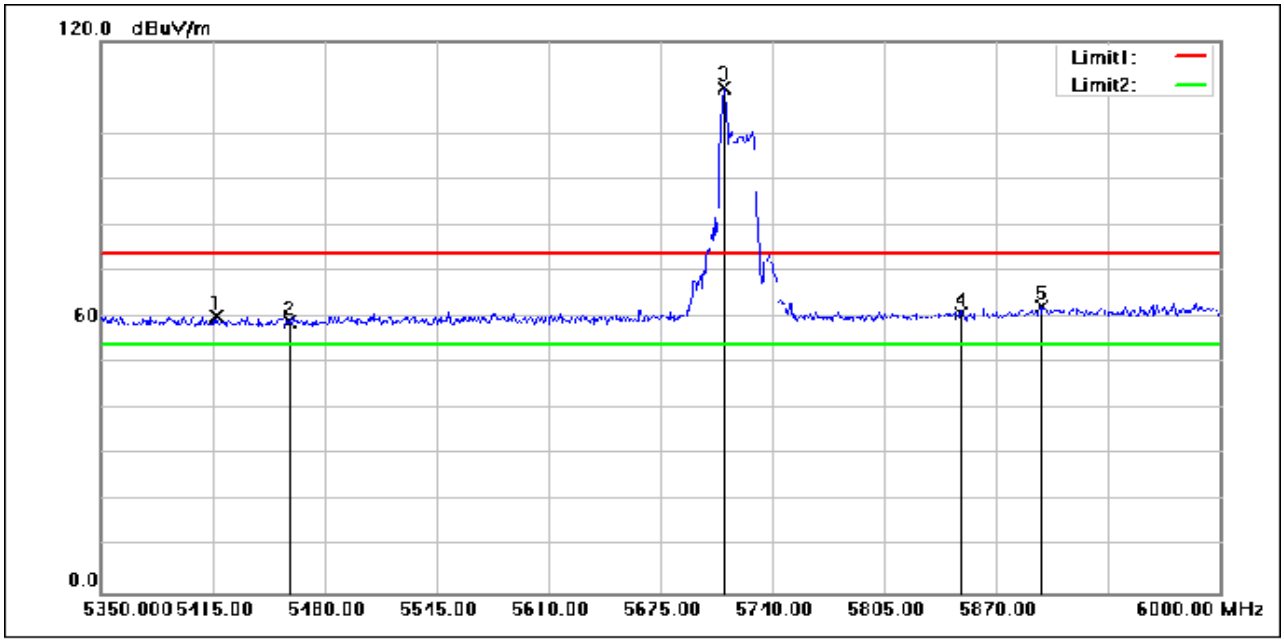


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.950	75.55	-15.37	60.18	74.00	-13.82	peak
2	5460.000	74.24	-15.30	58.94	74.00	-15.06	peak
3	5712.050	124.70	-14.63	110.07	74.00	36.07	peak
4	5850.000	74.75	-14.03	60.72	74.00	-13.28	peak
5	5896.000	75.90	-13.74	62.16	74.00	-11.84	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

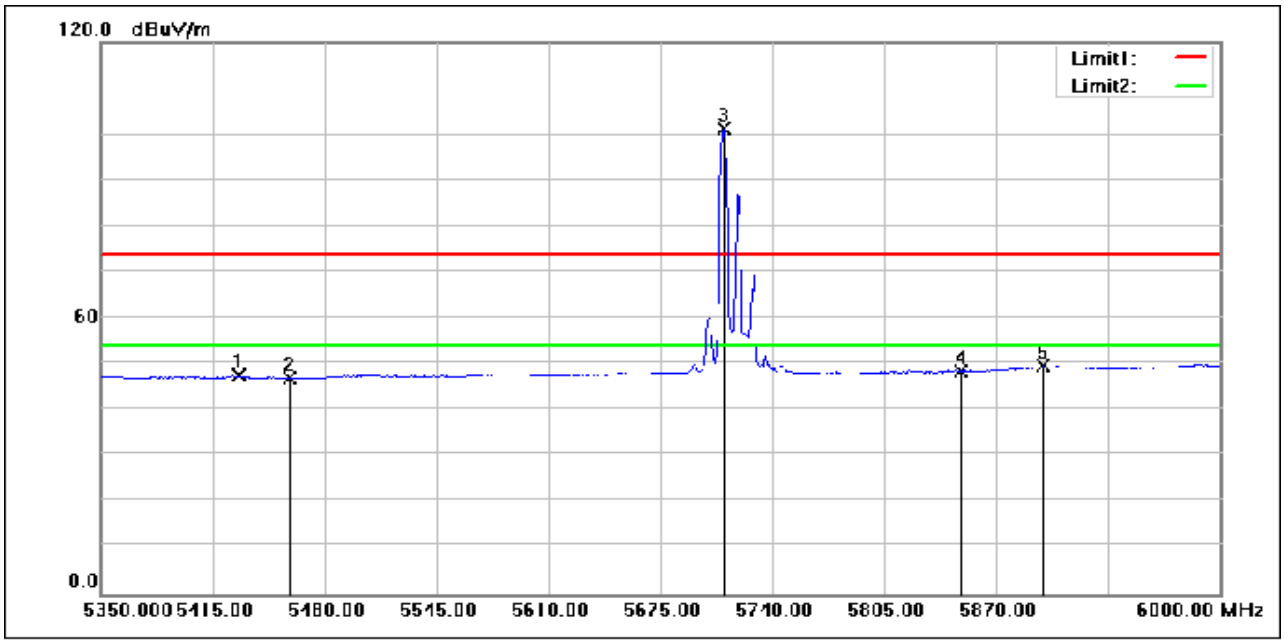


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.950	62.79	-15.35	47.44	54.00	-6.56	AVG
2	5460.000	62.20	-15.30	46.90	54.00	-7.10	AVG
3	5711.400	115.78	-14.63	101.15	54.00	47.15	AVG
4	5850.000	62.62	-14.03	48.59	54.00	-5.41	AVG
5	5897.300	63.27	-13.72	49.55	54.00	-4.45	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

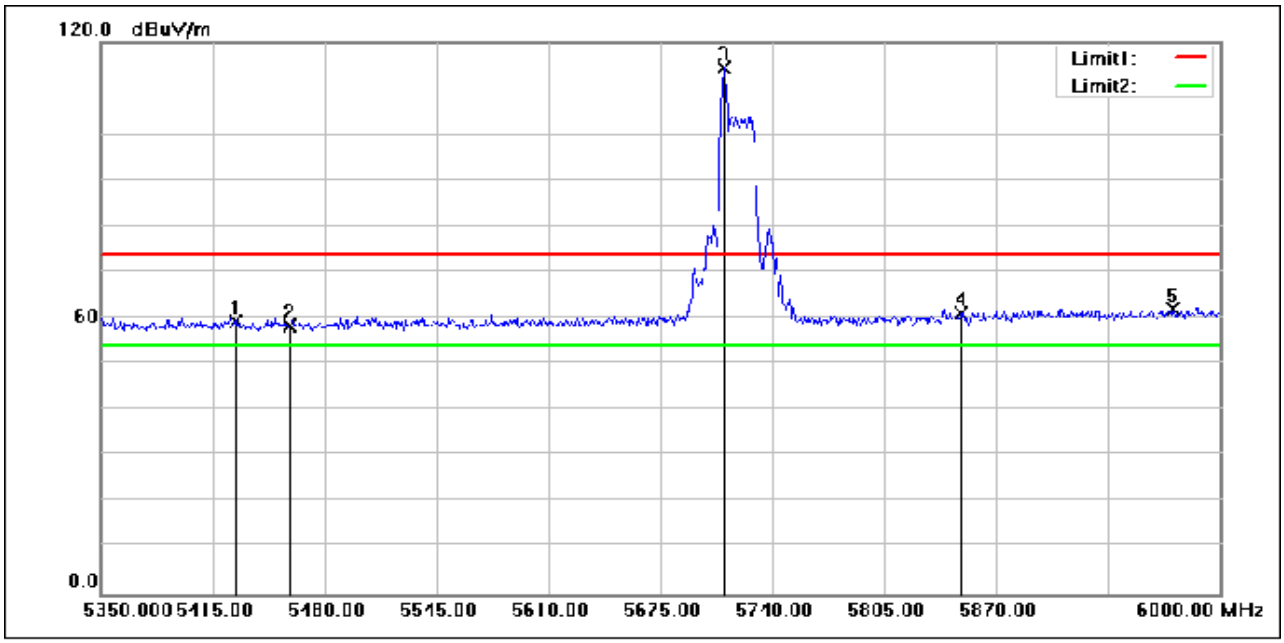


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5428.000	74.76	-15.36	59.40	74.00	-14.60	peak
2	5460.000	73.59	-15.30	58.29	74.00	-15.71	peak
3	5712.050	129.04	-14.63	114.41	74.00	40.41	peak
4	5850.000	75.08	-14.03	61.05	74.00	-12.95	peak
5	5972.700	75.18	-13.25	61.93	74.00	-12.07	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

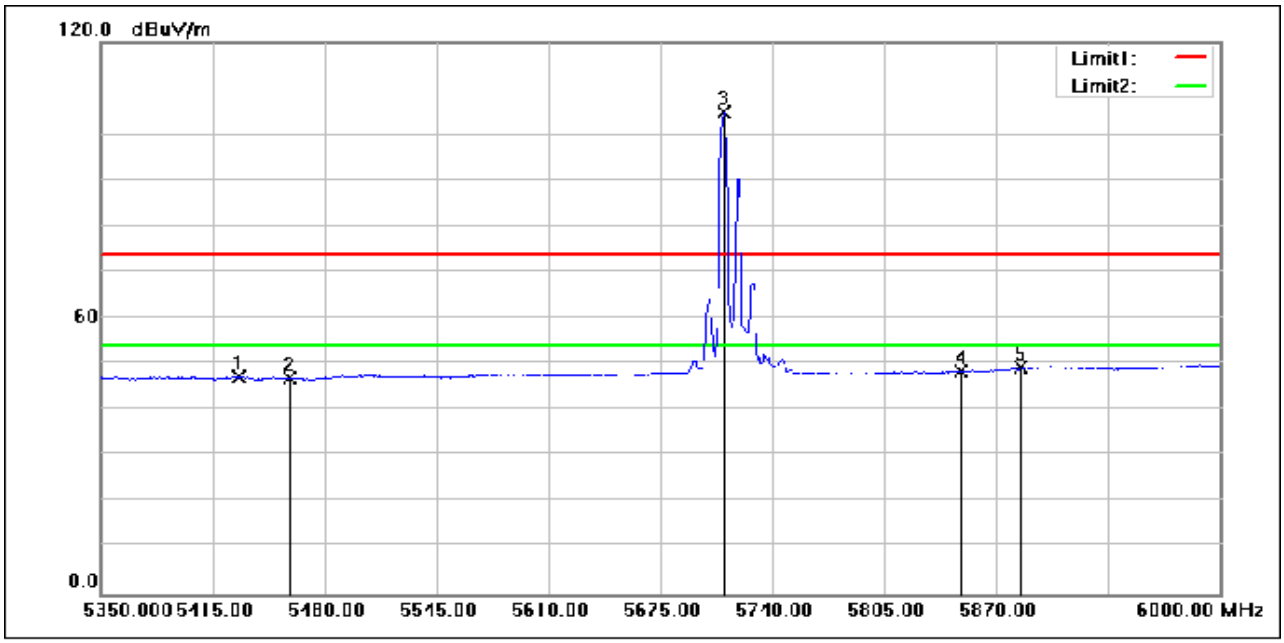


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.950	62.70	-15.35	47.35	54.00	-6.65	AVG
2	5460.000	62.21	-15.30	46.91	54.00	-7.09	AVG
3	5712.050	119.53	-14.63	104.90	54.00	50.90	AVG
4	5850.000	62.61	-14.03	48.58	54.00	-5.42	AVG
5	5884.300	63.02	-13.81	49.21	54.00	-4.79	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

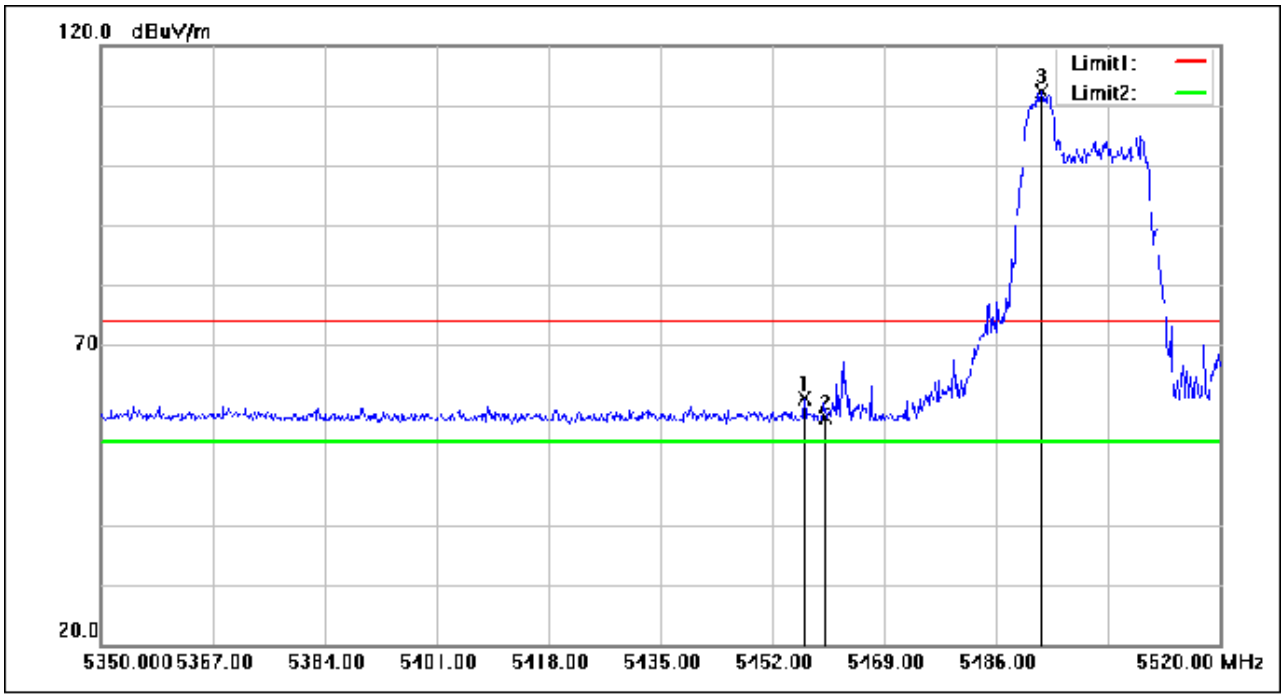


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.760	76.42	-15.30	61.12	74.00	-12.88	peak
2	5460.000	73.14	-15.30	57.84	74.00	-16.16	peak
3	5492.970	127.64	-15.25	112.39	74.00	38.39	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

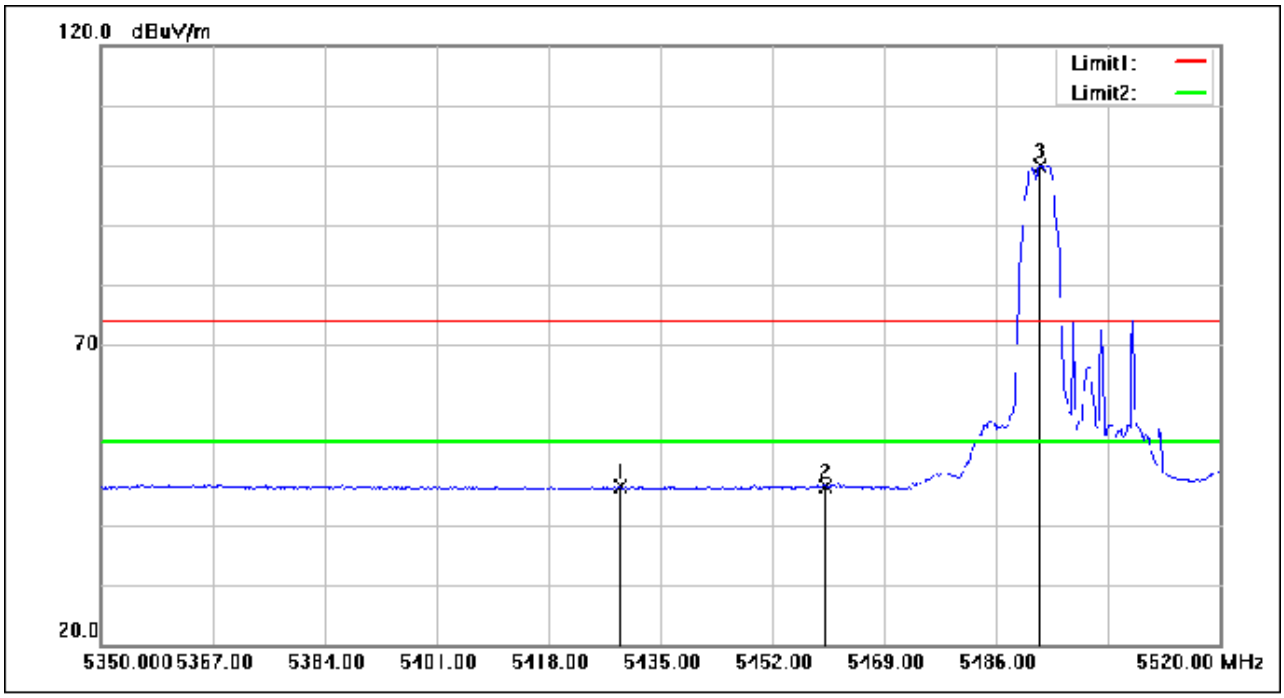


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.050	61.73	-15.35	46.38	54.00	-7.62	AVG
2	5460.000	61.67	-15.30	46.37	54.00	-7.63	AVG
3	5492.630	115.18	-15.25	99.93	54.00	45.93	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

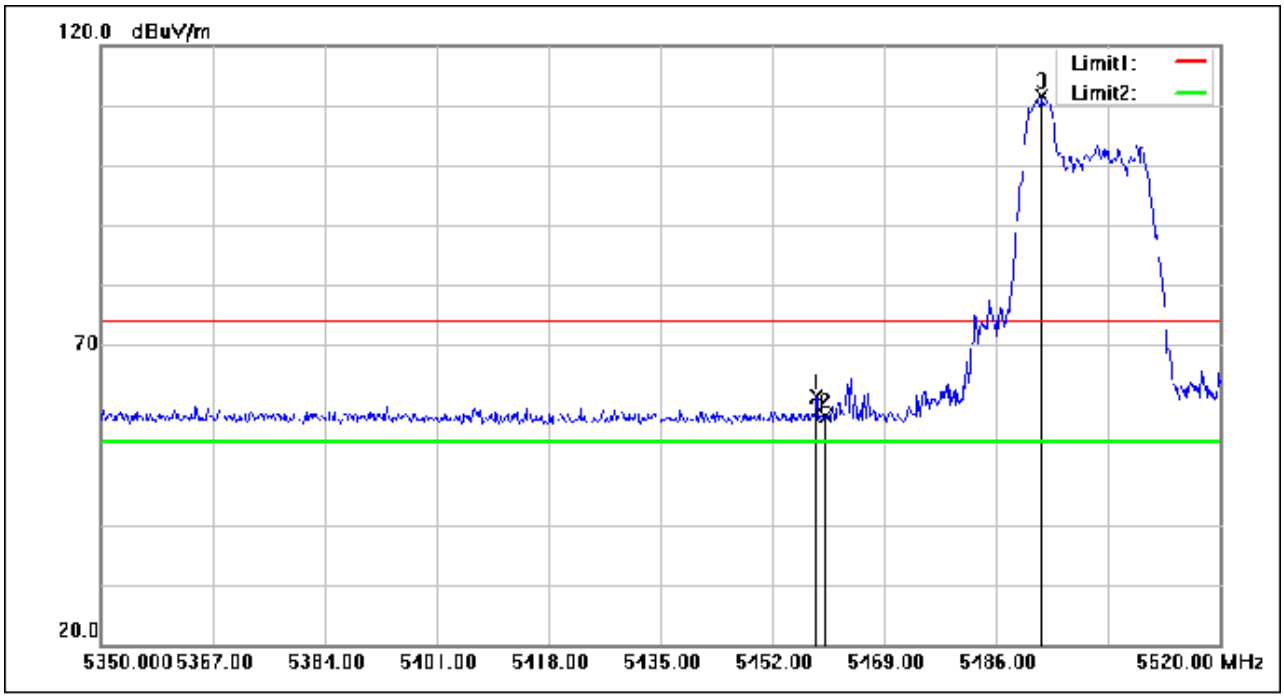


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.630	76.72	-15.30	61.42	74.00	-12.58	peak
2	5460.000	73.32	-15.30	58.02	74.00	-15.98	peak
3	5492.970	126.81	-15.25	111.56	74.00	37.56	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

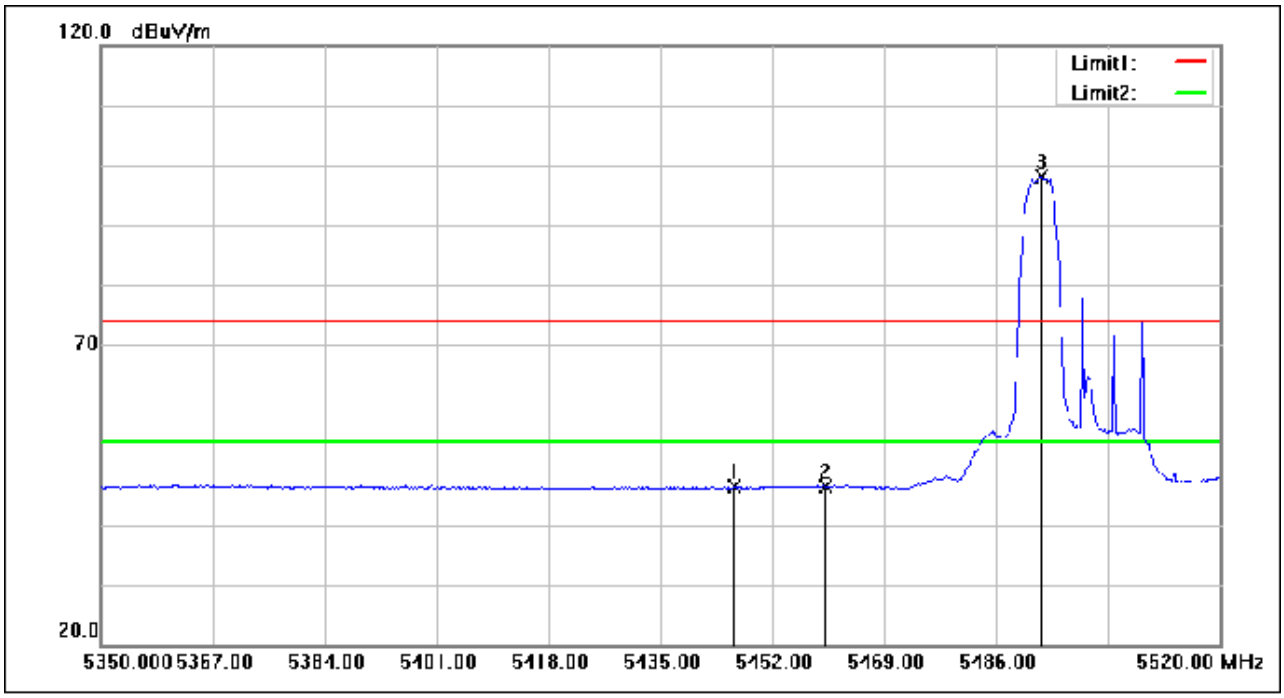


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.220	61.80	-15.32	46.48	54.00	-7.52	AVG
2	5460.000	61.59	-15.30	46.29	54.00	-7.71	AVG
3	5492.970	113.50	-15.25	98.25	54.00	44.25	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

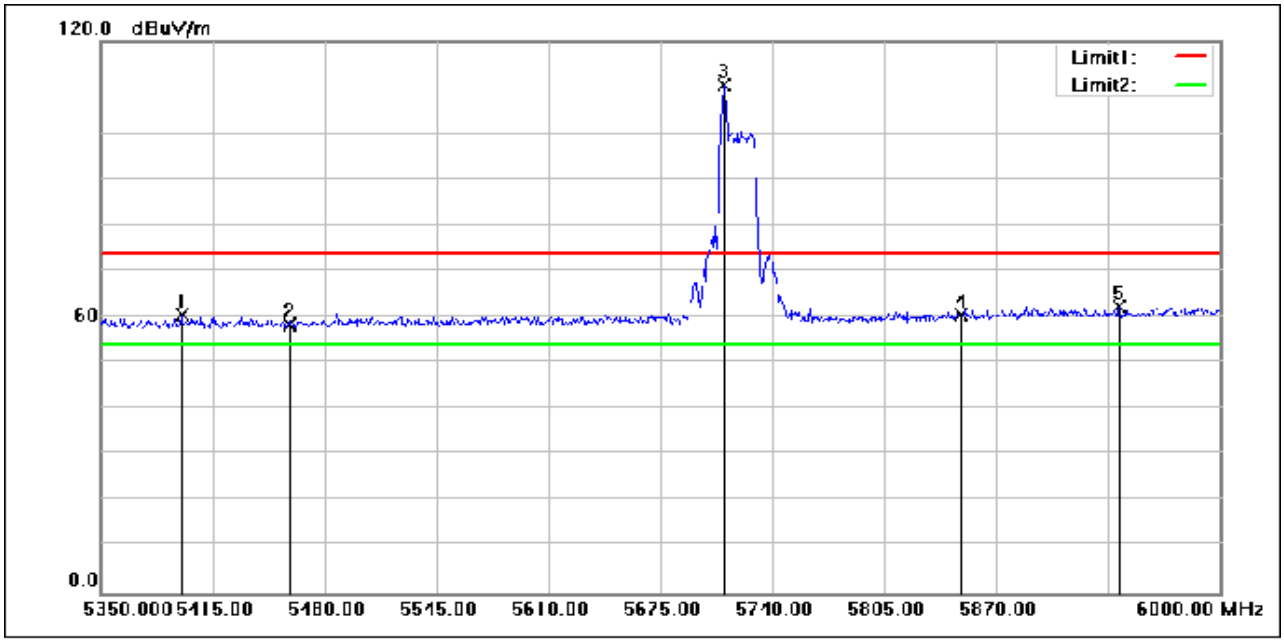


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5396.800	75.79	-15.41	60.38	74.00	-13.62	peak
2	5460.000	73.70	-15.30	58.40	74.00	-15.60	peak
3	5712.050	125.17	-14.63	110.54	74.00	36.54	peak
4	5850.000	74.34	-14.03	60.31	74.00	-13.69	peak
5	5941.500	75.62	-13.45	62.17	74.00	-11.83	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

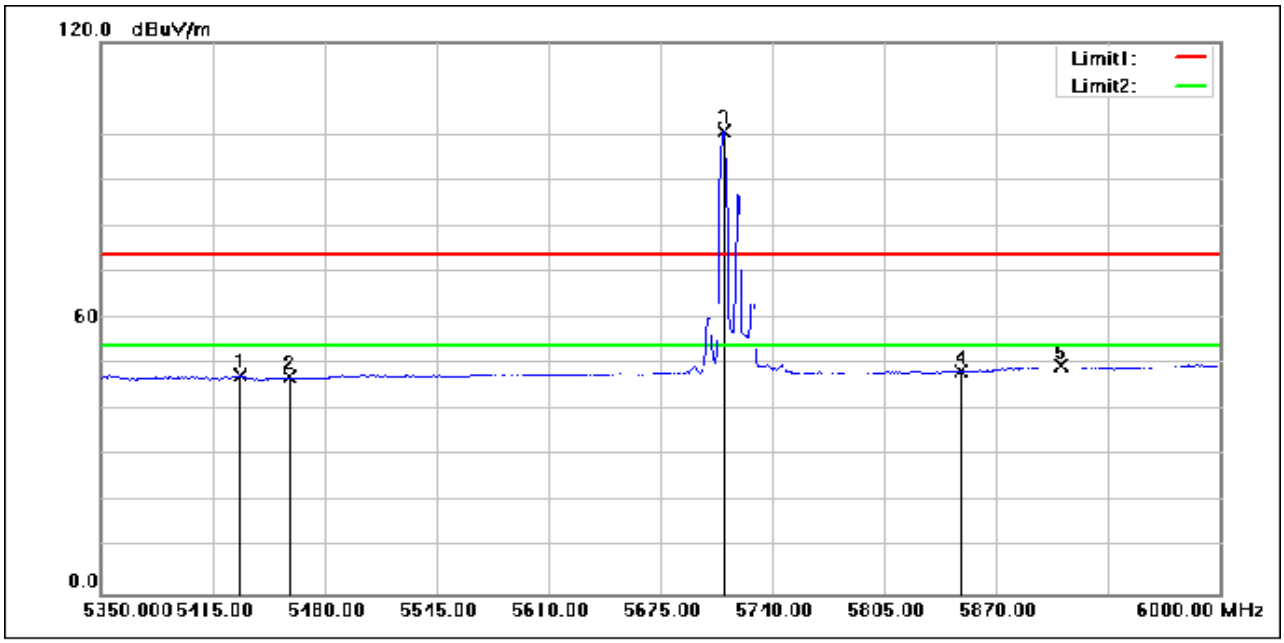


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.600	62.77	-15.34	47.43	54.00	-6.57	AVG
2	5460.000	62.47	-15.30	47.17	54.00	-6.83	AVG
3	5711.400	115.33	-14.63	100.70	54.00	46.70	AVG
4	5850.000	62.63	-14.03	48.60	54.00	-5.40	AVG
5	5907.700	63.19	-13.67	49.52	54.00	-4.48	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

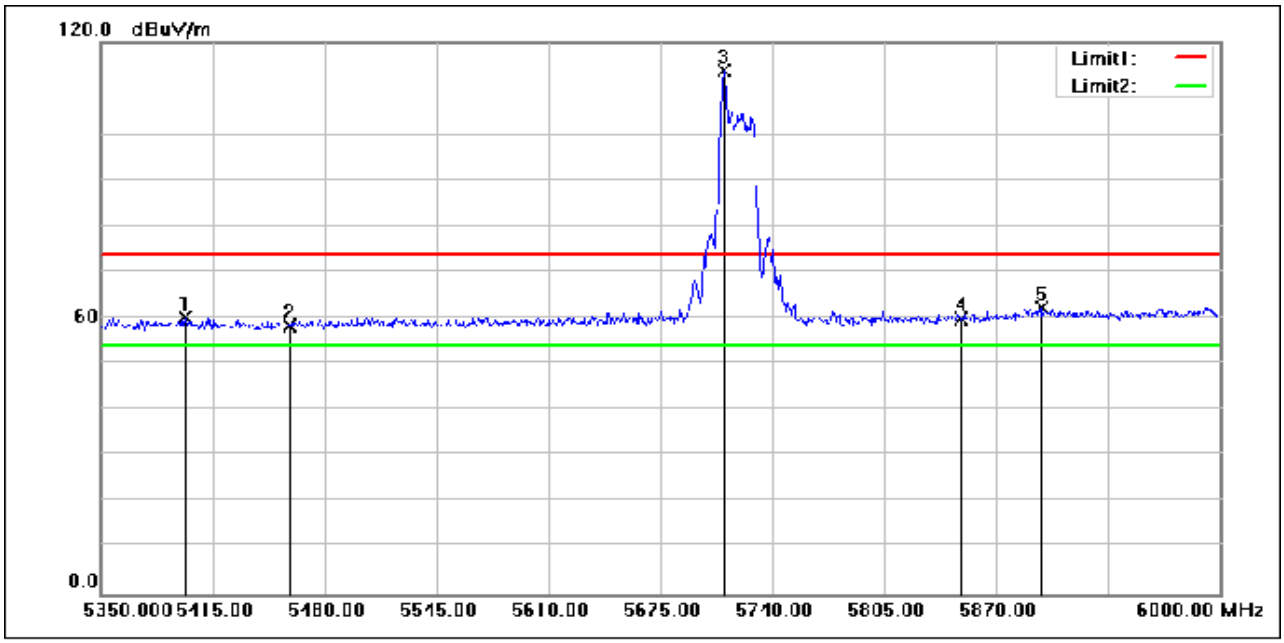


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5398.750	75.63	-15.41	60.22	74.00	-13.78	peak
2	5460.000	73.53	-15.30	58.23	74.00	-15.77	peak
3	5711.400	128.38	-14.63	113.75	74.00	39.75	peak
4	5850.000	73.75	-14.03	59.72	74.00	-14.28	peak
5	5896.000	75.97	-13.74	62.23	74.00	-11.77	peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:CH144(5720MHz)

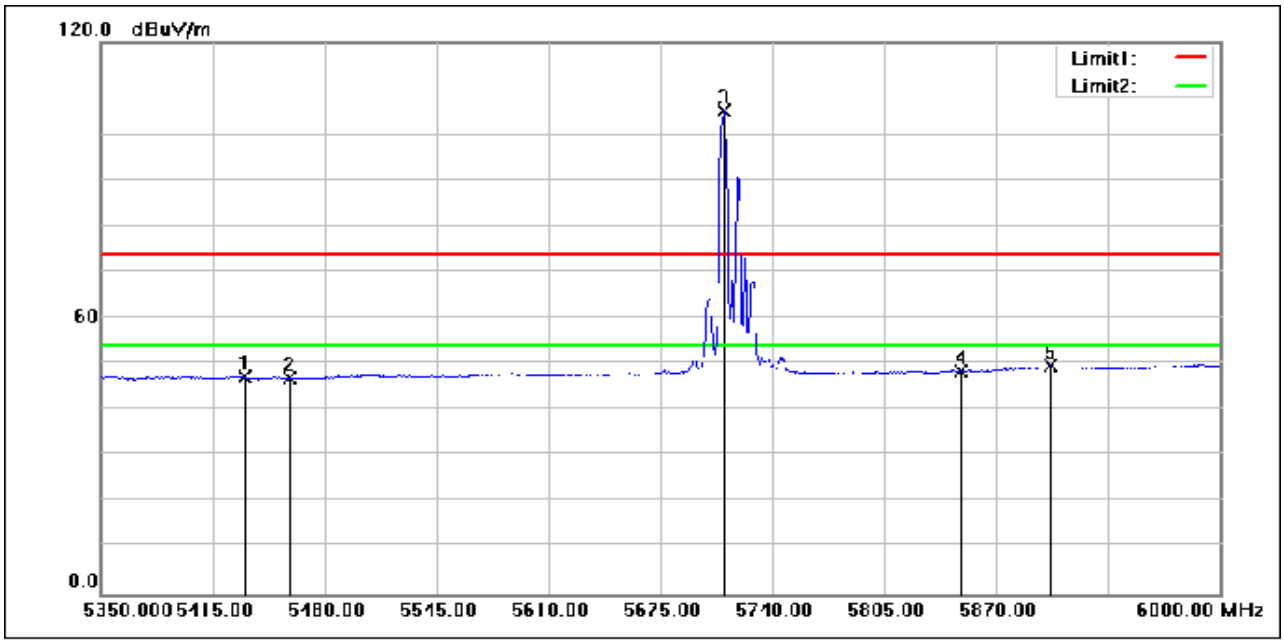


No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.200	62.70	-15.34	47.36	54.00	-6.64	AVG
2	5460.000	62.26	-15.30	46.96	54.00	-7.04	AVG
3	5712.050	119.84	-14.63	105.21	54.00	51.21	AVG
4	5850.000	62.56	-14.03	48.53	54.00	-5.47	AVG
5	5901.200	63.26	-13.70	49.56	54.00	-4.44	AVG

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

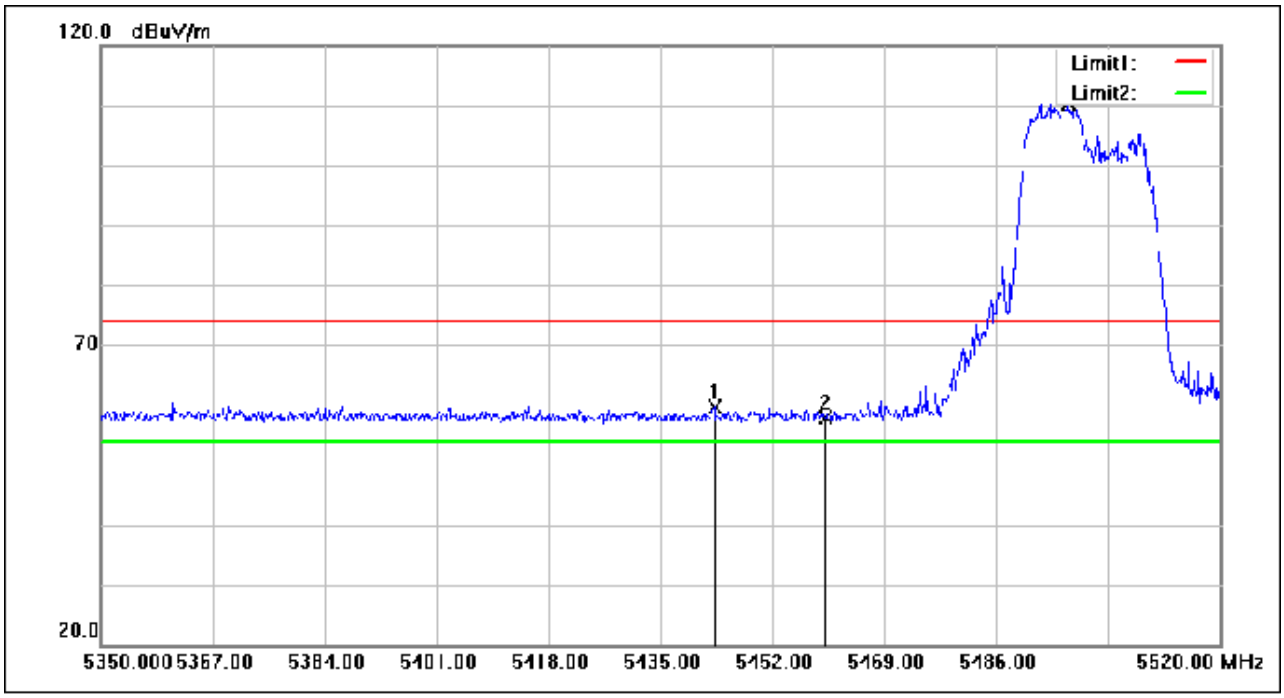


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.160	75.05	-15.32	59.73	74.00	-14.27	peak
2	5460.000	73.07	-15.30	57.77	74.00	-16.23	peak
3	5497.050	125.54	-15.25	110.29	74.00	36.29	peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

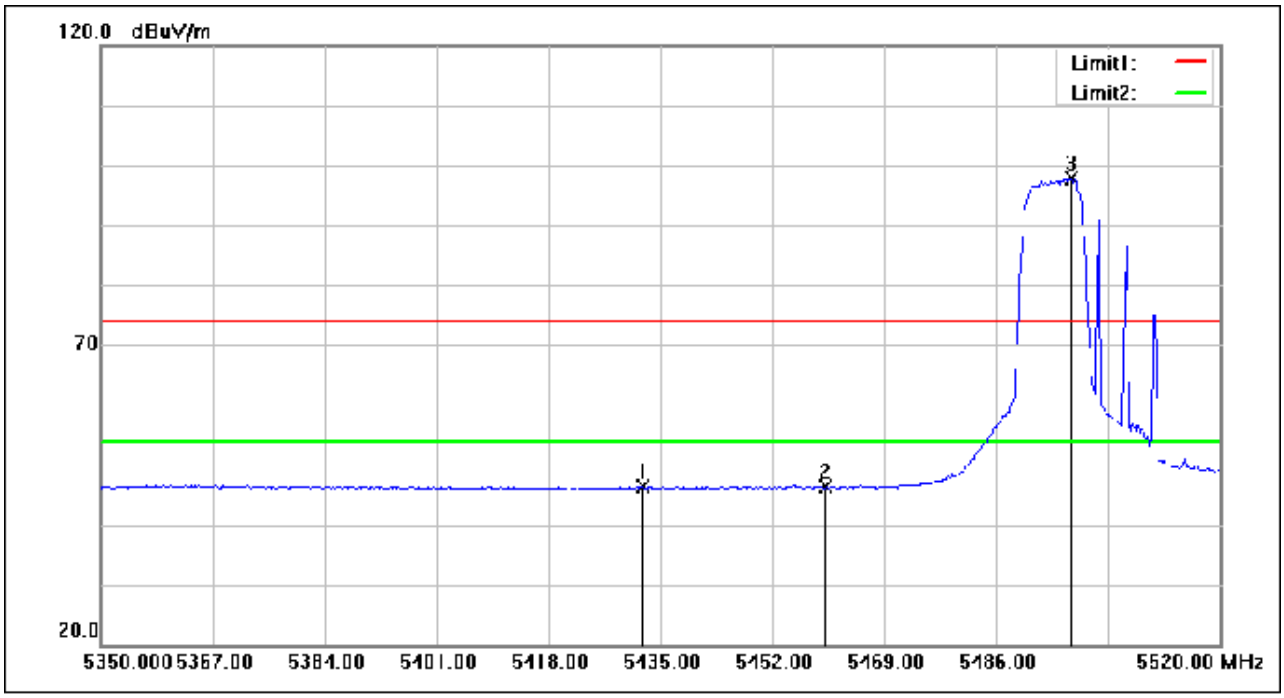

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.450	61.84	-15.34	46.50	54.00	-7.50	AVG
2	5460.000	61.56	-15.30	46.26	54.00	-7.74	AVG
3	5497.390	113.03	-15.25	97.78	54.00	43.78	AVG

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

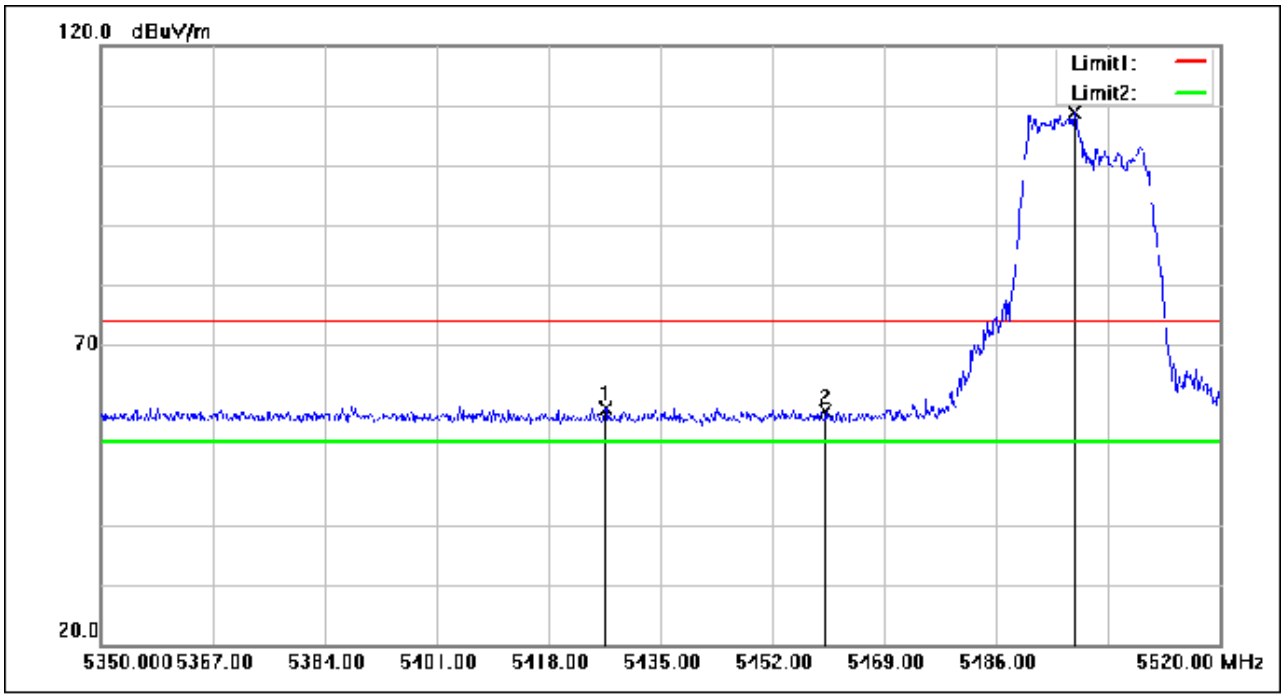

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.670	74.79	-15.36	59.43	74.00	-14.57	peak
2	5460.000	74.10	-15.30	58.80	74.00	-15.20	peak
3	5497.900	124.19	-15.25	108.94	74.00	34.94	peak