

SAR / IPD TEST REPORT

Project No. : JB-Z1400
Client : Murata Manufacturing Co., Ltd.
Address : 10-1 Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555 Japan
Type of Equipment : Communication Module
Model No. : 2CX (* installed in Digital Camera 2CX001)
FCC ID : VPYLBEE5QG2CX
Regulation Applied : FCC 47 CFR 2.1093

SAR / IPD Limits :

Exposure Characteristics	SAR averaged over any 1 g of tissue	IPD averaged over any square 4-cm ² area
General Public Exposure	1.6 W/kg	1.0 mW/cm ² = 10 W/m ²

The Highest Reported SAR/ IPD :

RF Exposure Conditions		SAR				IPD
		Bluetooth	Wi-Fi 2.4 GHz	Wi-Fi 5 GHz	Wi-Fi 6 GHz (≤ 6 GHz)	Wi-Fi 6 GHz (> 6 GHz)
Standalone	Body-Worn	0.066 W/kg	0.225 W/kg	0.129 W/kg	0.077 W/kg	1.463 W/m ²
Simultaneous Tx	Sum of SAR	0.231 W/kg				N/A
	TER (≤ 1)	0.290				

Test Result : **Complied**

Sample Receipt : July 22, 2024
Testing : September 13, 2024 - January 10, 2025 (for conducted power measurements)
February 18, 2025 - March 26, 2025 (for SAR / IPD measurements)
Reported : March 31, 2025

Reported by :

Approved Signatory :

K. OHYAMA

Koji Ohyama
Technical Manager
EMC/ RF Test Laboratory Main Lab.
Design Technology Division
Sony Global Manufacturing & Operations Corporation

Koji Hayama

Koji Hayama
Technical Manager
EMC/ RF Test Laboratory Main Lab.
Design Technology Division
Sony Global Manufacturing & Operations Corporation

Notice

- * These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
- * This report shall not be reproduced except in full, without written approval of the laboratory.
- * This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S. Government.
- * All test results are traceable to the national and / or international standards.
- * The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/ RF Test Laboratory.



Format No.: NV1-1-01 Version 5.0

REVISION HISTORY

Project No.	Revision	Page	Description	Issued date
JB-Z1400	Original	-	-	March 31, 2025

DISCLAIMER

This report includes the information provided by the customer as below;

- Cover page : Client and product related information
- Clause 1.1 : Description of Device Under Test (DUT)
- Clause 1.2 : Antenna Placement
- Clause 1.3 : Simultaneous Transmission Conditions
- Clause 1.4 : Nominal and Maximum Possible Power (Maximum Tune-up Tolerance Limit)

* The laboratory is not responsible for results affected by the above information.

Note(s)

- ☒ - indicates that the listed condition, standard or equipment is applicable for this report.
☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

TABLE OF CONTENTS

1. General Information	4
1.1. Description of Device Under Test (DUT)	4
1.2. Antenna Placement	5
1.3. Simultaneous Transmission Conditions	5
1.4. Nominal and Maximum Possible Power (Maximum Tune-up Tolerance Limit)	6
1.5. RF Exposure Conditions	9
1.6. RF Exposure Limits	9
1.7. SAR Test Exclusion	10
1.8. Test Specification, Methods and Procedures	12
1.9. Test Facilities and Accreditation	13
2. Test Set-up	14
2.1. Test Equipment and Measurement Software Lists	14
2.2. Measurement System Description	16
2.3. Measurement System Main Components	18
2.4. Tissue Simulating Liquids	22
2.5. SAR Measurement	23
2.6. IPD Measurement	24
2.7. Measurement Uncertainty	25
2.8. Dielectric Parameter Measurement of Tissue Simulating Liquids	32
2.9. System Check Measurement	34
3. Conducted Power Measurements	38
3.1. Conducted Power Measurement Results	39
4. SAR / APD / IPD Measurements	47
4.1. SAR Measurement Results (other than Wi-Fi 6 GHz)	50
4.2. SAR / APD / IPD Measurement Results (Wi-Fi 6 GHz)	55
5. Simultaneous Transmission SAR evaluation	58
Appendix A. Plots of SAR / IPD Measurement	60
Appendix B. Plots of System Check	74
Appendix C. Calibration Certificate	87
Appendix D. Photographs	218

1. General Information

1.1. Description of Device Under Test (DUT)

DUT Descriptions

	DUT
Type of Equipment	Communication Module
Model No.	2CX
FCC-ID	VPYLBEE5QG2CX
Test Sample Condition	☐ Prototype ☐ Pre-production ☒ Mass-production * Not for sale: The sample is equivalent to mass-production items. * No modification by the test lab.
Serial No.	1, 2
Rating	DC 3.85 V (VPH_PA_2G_CH0, VPH_PA_2G_CH1, VPH_PA_5G_CH0, VPH_PA_5G_CH1) DC 1.80 V (VDD18_DIG_IO) DC 0.95 V (AON_RFACMN_LDO_IN, WLCX_BT_LDO_IN / WLMX_LDO_IN, RFA0P8_LDO_IN) DC 1.35 V (RFA12_LDO_IN, PCIE0P92_LDO_IN) DC 1.90 V (RFA17_LDO_IN, PCIE18_LDO_IN) * Supplied from the host.
Head/Body-Worn Accessories (supplied with the device)	n/a
Device Dimension (W x H x D)	9.3 mm x 7.0 mm x 1.1 mm
Device Category	Portable
Exposure Category	General population/ Uncontrolled environment
Note(s):	
* Please refer to Appendix D for Host Platform Descriptions.	

Wireless Technologies

Wireless Technologies	Frequency Bands	Operating Mode	Power Setting Mode
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11ax (HE20)	Standard Power Mode
	5 GHz	802.11a 802.11n (HT20/HT40) 802.11ac (VHT20/VHT40/VHT80) 802.11ax (HE20/HE40/HE80/HE160)	High Power Mode
	6 GHz	802.11a 802.11ax (HE20/HE40/HE80/HE160)	High Power Mode
Bluetooth	2.4 GHz	BR/EDR/LE	n/a
Note(s): * The DUT installed in this host does not support the Wi-Fi 2.4 GHz High Power Mode, Wi-Fi 5 GHz Standard Power Mode, and Wi-Fi 6 GHz Standard Power Mode operations.			

Radio Specification

		Chain 0	Chain 1
Wireless Technologies		Wi-Fi 2.4 / 5 GHz / 6 GHz, Bluetooth	Wi-Fi 2.4 / 5 GHz / 6 GHz
Antenna Type		Monopole antenna	Slot antenna
Antenna Gain	Original Approval	-0.23 dBi (2.4 GHz) +0.51 dBi (5 GHz) -1.36 dBi (6 GHz)	+1.65 dBi (2.4 GHz) +1.13 dBi (5 GHz) -1.14 dBi (6 GHz)
	Class II Permissive Change (*The DUT is installed in this host.)	-6.56 dBi (2.4 GHz) -2.46 dBi (5 GHz) -2.22 dBi (6 GHz)	-3.58 dBi (2.4 GHz) -2.87 dBi (5 GHz) -2.53 dBi (6 GHz)
Note(s):			
* The antenna is of the same type and lower gain than in the original approval.			

1.2. Antenna Placement

Antenna	Minimum Distance from Edges or Sides of Host Platform (mm)								
	Front	Front-Right	Back	Left	Right	Top	Top-Left	Top-Right	Bottom
Chain 0	*1	*1	*1	*1	*1	*1	*1	*1	*1
Chain 1	*1	*1	*1	*1	*1	*1	*1	*1	*1

*1 Please refer to Appendix D.

1.3. Simultaneous Transmission Conditions

RF Exposure Conditions	No.	Capable Transmit Configurations						
		Bluetooth	Wi-Fi 2.4 GHz		Wi-Fi 5 GHz		Wi-Fi 6 GHz	
		Chain 0	Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
Body-Worn	1	-	Yes	Yes	-	-	-	-
	2	-	-	-	Yes	Yes	-	-
	3	-	-	-	-	-	Yes	Yes
	4	Yes	-	-	Yes	Yes	-	-
	5	Yes	-	-	-	-	Yes	Yes

1.4. Nominal and Maximum Possible Power (Maximum Tune-up Tolerance Limit)

Chain 0

Wireless Technologies	Mode	Band	Frequency Band (MHz)		Channel	Data Rate /MCS	Full Power (Burst Averaged)	Ant. Gain (dBi)	Effective Radiated Power (dBm) *1
			Lower	Higher			Max. Tune-up Limit (dBm)		
Bluetooth	BR	2.4 GHz	2402	2480	All	-	10.00	-6.56	1.29
	EDR		2402	2480	All	-	10.00	-6.56	1.29
	LE		2402	2480	All	-	10.00	-6.56	1.29
Wi-Fi	802.11b	2.4 GHz	2412	2462	All	All	9.50	-6.56	0.79
	802.11g		2412	2462	All	All	9.50	-6.56	0.79
	802.11n (HT20)		2412	2462	All	All	9.50	-6.56	0.79
	802.11ax (HE20)		2412	2462	All	All	9.50	-6.56	0.79
	802.11a	5.2 GHz	5180	5240	All	All	11.50	-2.46	6.89
		5.3 GHz	5260	5320	All	All	11.50	-2.46	6.89
		5.6 GHz	5500	5700	All	All	11.50	-2.46	6.89
		5.8 GHz	5745	5825	All	All	11.50	-2.46	6.89
	802.11n (HT20)	5.2 GHz	5180	5240	All	All	11.50	-2.46	6.89
		5.3 GHz	5260	5320	All	All	11.50	-2.46	6.89
		5.6 GHz	5500	5700	All	All	11.50	-2.46	6.89
		5.8 GHz	5745	5825	All	All	11.50	-2.46	6.89
	802.11n (HT40)	5.2 GHz	5190	5230	All	All	11.50	-2.46	6.89
		5.3 GHz	5270	5310	All	All	11.50	-2.46	6.89
		5.6 GHz	5510	5670	All	All	11.50	-2.46	6.89
		5.8 GHz	5755	5795	All	All	11.50	-2.46	6.89
	802.11ac (VHT20)	5.2 GHz	5180	5240	All	All	11.50	-2.46	6.89
		5.3 GHz	5260	5320	All	All	11.50	-2.46	6.89
		5.6 GHz	5500	5700	All	All	11.50	-2.46	6.89
		5.8 GHz	5745	5825	All	All	11.50	-2.46	6.89
	802.11ac (VHT40)	5.2 GHz	5190	5230	All	All	11.50	-2.46	6.89
		5.3 GHz	5270	5310	All	All	11.50	-2.46	6.89
		5.6 GHz	5510	5670	All	All	11.50	-2.46	6.89
		5.8 GHz	5755	5795	All	All	11.50	-2.46	6.89
	802.11ac (VHT80)	5.2 GHz	5210		All	All	11.50	-2.46	6.89
		5.3 GHz	5290		All	All	11.50	-2.46	6.89
		5.6 GHz	5530	5610	All	All	11.50	-2.46	6.89
		5.8 GHz	5775		All	All	11.50	-2.46	6.89
	802.11ax (HE20)	5.2 GHz	5180	5240	All	All	11.50	-2.46	6.89
		5.3 GHz	5260	5320	All	All	11.50	-2.46	6.89
		5.6 GHz	5500	5700	All	All	11.50	-2.46	6.89
		5.8 GHz	5745	5825	All	All	11.50	-2.46	6.89
	802.11ax (HE40)	5.2 GHz	5190	5230	All	All	11.50	-2.46	6.89
		5.3 GHz	5270	5310	All	All	11.50	-2.46	6.89
		5.6 GHz	5510	5670	All	All	11.50	-2.46	6.89
		5.8 GHz	5755	5795	All	All	11.50	-2.46	6.89
	802.11ax (HE80)	5.2 GHz	5210		All	All	11.50	-2.46	6.89
		5.3 GHz	5290		All	All	11.50	-2.46	6.89
		5.6 GHz	5530	5610	All	All	11.50	-2.46	6.89
		5.8 GHz	5775		All	All	11.50	-2.46	6.89

*1 Effective Radiated Power (dBm) = Max. Tune-up Limit (dBm) + Ant. Gain (dBi) – 2.15 dB

Chain 0 (Continued)

Wireless Technologies	Mode	Band	Frequency Band (MHz)		Channel	Data Rate /MCS	Full Power (Burst Averaged)	Ant. Gain (dBi)	Effective Radiated Power (dBm) *1
			Lower	Higher			Max. Tune-up Limit (dBm)		
Wi-Fi	802.11ax (HE160)	5.2 GHz	5250		All	All	11.50	-2.46	6.89
		5.3 GHz			All	All	11.50	-2.46	6.89
		5.6 GHz	5570		All	All	11.50	-2.46	6.89
		5.8 GHz	N/A		N/A	N/A	N/A	N/A	N/A
	802.11a	6 GHz	5955	7095	All	All	5.50	-2.22	1.13
	802.11ax (HE20)	6 GHz	5955	7095	All	All	5.50	-2.22	1.13
	802.11ax (HE40)	6 GHz	5965	7085	All	All	8.50	-2.22	4.13
	802.11ax (HE80)	6 GHz	5985	7025	All	All	11.50	-2.22	7.13
	802.11ax (HE160)	6 GHz	6025	6985	All	All	11.50	-2.22	7.13

Chain 1

Wireless Technologies	Mode	Band	Frequency Band (MHz)		Channel	Data Rate /MCS	Full Power (Burst Averaged)	Ant. Gain (dBi)	Effective Radiated Power (dBm) *1
			Lower	Higher			Max. Tune-up Limit (dBm)		
Wi-Fi	802.11b	2.4 GHz	2412	2462	All	All	9.50	-3.58	3.77
	802.11g		2412	2462	All	All	9.50	-3.58	3.77
	802.11n (HT20)		2412	2462	All	All	9.50	-3.58	3.77
	802.11ax (HE20)		2412	2462	All	All	9.50	-3.58	3.77
	802.11a	5.2 GHz	5180	5240	All	All	11.50	-2.87	6.48
		5.3 GHz	5260	5320	All	All	11.50	-2.87	6.48
		5.6 GHz	5500	5700	All	All	11.50	-2.87	6.48
		5.8 GHz	5745	5825	All	All	11.50	-2.87	6.48
	802.11n (HT20)	5.2 GHz	5180	5240	All	All	11.50	-2.87	6.48
		5.3 GHz	5260	5320	All	All	11.50	-2.87	6.48
		5.6 GHz	5500	5700	All	All	11.50	-2.87	6.48
		5.8 GHz	5745	5825	All	All	11.50	-2.87	6.48
	802.11n (HT40)	5.2 GHz	5190	5230	All	All	11.50	-2.87	6.48
		5.3 GHz	5270	5310	All	All	11.50	-2.87	6.48
		5.6 GHz	5510	5670	All	All	11.50	-2.87	6.48
		5.8 GHz	5755	5795	All	All	11.50	-2.87	6.48

*1 Effective Radiated Power (dBm) = Max. Tune-up Limit (dBm) + Ant. Gain (dBi) – 2.15 dB

Chain 1 (Continued)

Wireless Technologies	Mode	Band	Frequency Band (MHz)		Channel	Data Rate /MCS	Full Power (Burst Averaged)	Ant. Gain (dBi)	Effective Radiated Power (dBm) *1
			Lower	Higher			Max. Tune-up Limit (dBm)		
Wi-Fi	802.11ac (VHT20)	5.2 GHz	5180	5240	All	All	11.50	-2.87	6.48
		5.3 GHz	5260	5320	All	All	11.50	-2.87	6.48
		5.6 GHz	5500	5700	All	All	11.50	-2.87	6.48
		5.8 GHz	5745	5825	All	All	11.50	-2.87	6.48
	802.11ac (VHT40)	5.2 GHz	5190	5230	All	All	11.50	-2.87	6.48
		5.3 GHz	5270	5310	All	All	11.50	-2.87	6.48
		5.6 GHz	5510	5670	All	All	11.50	-2.87	6.48
		5.8 GHz	5755	5795	All	All	11.50	-2.87	6.48
	802.11ac (VHT80)	5.2 GHz	5210		All	All	11.50	-2.87	6.48
		5.3 GHz	5290		All	All	11.50	-2.87	6.48
		5.6 GHz	5530	5610	All	All	11.50	-2.87	6.48
		5.8 GHz	5775		All	All	11.50	-2.87	6.48
	802.11ax (HE20)	5.2 GHz	5180	5240	All	All	11.50	-2.87	6.48
		5.3 GHz	5260	5320	All	All	11.50	-2.87	6.48
		5.6 GHz	5500	5700	All	All	11.50	-2.87	6.48
		5.8 GHz	5745	5825	All	All	11.50	-2.87	6.48
	802.11ax (HE40)	5.2 GHz	5190	5230	All	All	11.50	-2.87	6.48
		5.3 GHz	5270	5310	All	All	11.50	-2.87	6.48
		5.6 GHz	5510	5670	All	All	11.50	-2.87	6.48
		5.8 GHz	5755	5795	All	All	11.50	-2.87	6.48
	802.11ax (HE80)	5.2 GHz	5210		All	All	11.50	-2.87	6.48
		5.3 GHz	5290		All	All	11.50	-2.87	6.48
		5.6 GHz	5530	5610	All	All	11.50	-2.87	6.48
		5.8 GHz	5775		All	All	11.50	-2.87	6.48
	802.11ax (HE160)	5.2 GHz	5250		All	All	11.50	-2.87	6.48
		5.3 GHz			All	All	11.50	-2.87	6.48
		5.6 GHz	5570		All	All	11.50	-2.87	6.48
		5.8 GHz	N/A		N/A	N/A	N/A	N/A	N/A
	802.11a	6 GHz	5955	7095	All	All	5.50	-2.53	0.82
	802.11ax (HE20)	6 GHz	5955	7095	All	All	5.50	-2.53	0.82
	802.11ax (HE40)	6 GHz	5965	7085	All	All	8.50	-2.53	3.82
	802.11ax (HE80)	6 GHz	5985	7025	All	All	11.50	-2.53	6.82
	802.11ax (HE160)	6 GHz	6025	6985	All	All	11.50	-2.53	6.82

*1 Effective Radiated Power (dBm) = Max. Tune-up Limit (dBm) + Ant. Gain (dBi) – 2.15 dB

1.5. RF Exposure Conditions

Wireless Technologies	RF Exposure Conditions	User-to-DUT Distance (mm)	Test Position	Host-to-Ant. Distance (mm)		SAR Required	Note(s)
				Chain 0	Chain 1		
Wi-Fi/ Bluetooth	Body-Worn	0	Front	*1	*1	N/A	*2
			Front-Right	*1	*1	Yes	*2
			Back	*1	*1	Yes	-
			Left	*1	*1	Yes	-
			Right	*1	*1	Yes	-
			Top	*1	*1	N/A	*3
			Top-Left	*1	*1	Yes	*3
			Top-Right	*1	*1	Yes	*3
			Bottom	*1	*1	Yes	-

*1 Please refer to Appendix D.

*2 Due to the shape of the protruding portion of the front surface of the DUT, SAR / IPD was evaluated with the “Front-Right” test position, instead of the “Front” test position. Please refer to Appendix D for more details.

*3 Due to the shape of the protruding portion of the top surface of the DUT, SAR / IPD was evaluated with the “Top-Left” and “Top-Right” test position, instead of the “Top” test position. Please refer to Appendix D for more details.

1.6. RF Exposure Limits

Human Exposure	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Spatial Peak SAR (Head and Trunk) averaged over any 1 g of tissue	1.6 W/kg*	8 W/kg
Spatial Average SAR (Whole Body) averaged over the whole body	0.08 W/kg	0.4 W/kg
Spatial Peak SAR (Limbs) averaged over any 10 g of tissue	4 W/kg	20 W/kg
Spatial Peak IPD (Incident Power Density) averaged over any square 4-cm ² area	1.0 mW/cm² = 10 W/m²*	5.0 mW/cm ² = 50 W/m ²

* The limit(s) applied in this report.

1.7. SAR Test Exclusion

☒ SAR test exclusion is applied according to KDB 447498 D01.

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$$

$$[\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where:}$$

- * $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- * Power and distance are rounded to the nearest mW and mm before calculation
- * The result is rounded to one decimal place for comparison
- * When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Body-Worn SAR (1-g SAR) Test Exclusion as per KDB 447498 D01 – Chain 0

Freq. Band	Freq. (MHz)	Test Position	DUT-to-Ant Distance (mm)	User-to-Ant Distance (mm)	Min. Test Sep. Distance (mm)	Max. Possible Power				Exclusion Threshold	SAR Required (> 3.0)	SAR Tested
						Chain 0 (dBm)	Chain 1 (dBm)	Total (mW)	Rounded (mW)			
Bluetooth	2450	Front-Right	*1	*1	*1	10.0	N/A	10.0	10	*1	No	Yes *2
	2450	Back	*1	*1	*1	10.0	N/A	10.0	10	*1	No	Yes *2
	2450	Left	*1	*1	*1	10.0	N/A	10.0	10	*1	No	-
	2450	Right	*1	*1	*1	10.0	N/A	10.0	10	*1	No	-
	2450	Top-Left	*1	*1	*1	10.0	N/A	10.0	10	*1	Yes	Yes
	2450	Top-Right	*1	*1	*1	10.0	N/A	10.0	10	*1	No	Yes *2
	2450	Bottom	*1	*1	*1	10.0	N/A	10.0	10	*1	No	-
Wi-Fi 2.4 GHz	2450	Front-Right	*1	*1	*1	9.5	9.5	17.8	18	*1	Yes	Yes
	2450	Back	*1	*1	*1	9.5	9.5	17.8	18	*1	No	Yes *2
	2450	Left	*1	*1	*1	9.5	9.5	17.8	18	*1	No	-
	2450	Right	*1	*1	*1	9.5	9.5	17.8	18	*1	No	-
	2450	Top-Left	*1	*1	*1	9.5	9.5	17.8	18	*1	Yes	Yes
	2450	Top-Right	*1	*1	*1	9.5	9.5	17.8	18	*1	No	Yes *2
	2450	Bottom	*1	*1	*1	9.5	9.5	17.8	18	*1	No	-
Wi-Fi 5 GHz	5800	Front-Right	*1	*1	*1	11.5	11.5	28.3	28	*1	Yes	Yes
	5800	Back	*1	*1	*1	11.5	11.5	28.3	28	*1	No	Yes *2
	5800	Left	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
	5800	Right	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
	5800	Top-Left	*1	*1	*1	11.5	11.5	28.3	28	*1	Yes	Yes
	5800	Top-Right	*1	*1	*1	11.5	11.5	28.3	28	*1	No	Yes *2
	5800	Bottom	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
Wi-Fi 6 GHz	6000	Front-Right	*1	*1	*1	11.5	11.5	28.3	28	*1	Yes	Yes
	6000	Back	*1	*1	*1	11.5	11.5	28.3	28	*1	No	Yes *2
	6000	Left	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
	6000	Right	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
	6000	Top-Left	*1	*1	*1	11.5	11.5	28.3	28	*1	Yes	Yes
	6000	Top-Right	*1	*1	*1	11.5	11.5	28.3	28	*1	No	Yes *2
	6000	Bottom	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-

*1 Please refer to Appendix D.

*2 Tested because its exclusion thresholds are close to 3.0, or for the simultaneous transmission analysis.

Body-Worn SAR (1-g SAR) Test Exclusion as per KDB 447498 D01 – Chain 1

Freq. Band	Freq. (MHz)	Test Position	DUT-to-Ant Distance (mm)	User-to-Ant Distance (mm)	Min. Test Sep. Distance (mm)	Max. Possible Power				Exclusion Threshold	SAR Required (> 3.0)	SAR Tested
						Chain 0 (dBm)	Chain 1 (dBm)	Total (mW)	Rounded (mW)			
Wi-Fi 2.4 GHz	2450	Front-Right	*1	*1	*1	9.5	9.5	17.8	18	*1	Yes	Yes
	2450	Back	*1	*1	*1	9.5	9.5	17.8	18	*1	No	Yes *2
	2450	Left	*1	*1	*1	9.5	9.5	17.8	18	*1	No	-
	2450	Right	*1	*1	*1	9.5	9.5	17.8	18	*1	No	-
	2450	Top-Left	*1	*1	*1	9.5	9.5	17.8	18	*1	No	Yes *2
	2450	Top-Right	*1	*1	*1	9.5	9.5	17.8	18	*1	Yes	Yes
	2450	Bottom	*1	*1	*1	9.5	9.5	17.8	18	*1	No	-
Wi-Fi 5 GHz	5800	Front-Right	*1	*1	*1	11.5	11.5	28.3	28	*1	Yes	Yes
	5800	Back	*1	*1	*1	11.5	11.5	28.3	28	*1	No	Yes *2
	5800	Left	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
	5800	Right	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
	5800	Top-Left	*1	*1	*1	11.5	11.5	28.3	28	*1	No	Yes *2
	5800	Top-Right	*1	*1	*1	11.5	11.5	28.3	28	*1	Yes	Yes
	5800	Bottom	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
Wi-Fi 6 GHz	6000	Front-Right	*1	*1	*1	11.5	11.5	28.3	28	*1	Yes	Yes
	6000	Back	*1	*1	*1	11.5	11.5	28.3	28	*1	No	Yes *2
	6000	Left	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
	6000	Right	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-
	6000	Top-Left	*1	*1	*1	11.5	11.5	28.3	28	*1	No	Yes *2
	6000	Top-Right	*1	*1	*1	11.5	11.5	28.3	28	*1	Yes	Yes
	6000	Bottom	*1	*1	*1	11.5	11.5	28.3	28	*1	No	-

*1 Please refer to Appendix D.

*2 Tested because its exclusion thresholds are close to 3.0, or for the simultaneous transmission analysis.

1.8. Test Specification, Methods and Procedures

Test Specification

- ☒ FCC 47 CFR 2.1093 Radiofrequency radiation exposure evaluation: portable devices

Test Methods

- ☒ IEEE Std 1528-2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- ☒ IEC/IEEE 62209-1528: 2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices –Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
- ☒ IEC/IEEE 63195-1:2022 Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) - Part 1: Measurement procedure
- ☒ IEC PAS 63446: 2022 Conversion method of specific absorption rate to absorbed power density for the assessment of human exposure to radio frequency electromagnetic fields from wireless devices in close proximity to the head and body – Frequency range of 6 GHz to 10 GHz
- ☒ KDB 248227 D01 v02r02 SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
- ☒ KDB 388624 D02 v18r05 Pre-Approval Guidance List: Appendix OVER6G
- ☒ KDB 447498 D01 v06 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
- ☐ KDB 447498 D02 v02r01 SAR Measurement Procedures for USB Dongle Transmitters
- ☐ KDB 447498 D04 v01 RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
- ☒ KDB 615223 D01 v01r01 802.16e/WiMax SAR Measurement Guidance
- ☐ KDB 616217 D04 v01r02 SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
- ☐ KDB 648474 D03 v01r04 Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
- ☐ KDB 648474 D04 v01r03 SAR Evaluation Considerations for Wireless Handsets
- ☒ KDB 865664 D01 v01r04 SAR Measurement Requirements for 100 MHz to 6 GHz
- ☐ KDB 941225 D01 v03r01 3G SAR Measurement Procedures
- ☐ KDB 941225 D05 v02r05 SAR Evaluation Considerations for LTE Devices
- ☒ KDB 941225 D06 v02r01 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
- ☒ KDB 941225 D07 v01r02 SAR Evaluation Procedures for UMPC Mini-Tablet Devices
- ☒ TCB Workshop (Oct. 2016) RF Exposure Procedures; Bluetooth Duty Factor
- ☒ TCB Workshop (Nov. 2017) RF Exposure Procedures; System Validation & System Check
- ☒ TCB Workshop (Oct. 2018) RF Exposure Procedures; Millimeter Wave Assessment
- ☒ TCB Workshop (Apr. 2019) RF Exposure Procedures; Millimeter Wave Additional Considerations, 802.11ax SAR Testing
- ☒ TCB Workshop (Oct. 2020) RF Exposure Policies and Procedures; U-NII 6 - 7 GHz Interim Procedures
- ☒ TCB Workshop (Apr. 2022) RF Exposure Procedures; Sum-Peak Location Separation Ratio

Test Procedures

The SAR tests were performed according to the procedures of Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory, the Document No. NV3-2 and NV3-16, available upon request.

☒ No deviation from the procedures

☐ Deviation from the procedures

☐ _____

References

- [1] ICNIRP. Guidelines for limiting exposure to time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz). Health Physics 74(4): 494-522, 1998.
- [2] ICNIRP. Guidelines for limiting exposure to electromagnetic fields (100 kHz to 300 GHz). Health Physics 118(5): 483-524, 2020.
- [3] American National Standards Institute (ANSI), "Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1-1992.
- [4] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3 kHz to 300 GHz," Safety Code 6 (2015).
- [5] Health Canada, "Notice: Localized human exposure limits for radiofrequency fields in the range of 6 GHz to 300 GHz," January 2021.
- [6] European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz) (Official Journal L 199 of 30 July 1999).
- [7] REDCA Technical Guidance Note 20 (TGN 20), SAR Testing and Assessment Guidance, Version 6.5, October 2020.
- [8] Australian Communications and Media Authority (ACMA), Radiocommunications Equipment (General) Rules 2021.
- [9] Australian Radiation Protection and Nuclear Safety Agency (ARPANSA), "Standard for Limiting Exposure to Radiofrequency Fields – 100 kHz to 300 GHz, Radiation Protection Series S-1 (Rev. 1)," February 2021.
- [10] Australian Radiation Protection and Nuclear Safety Agency (ARPANSA), RPS S-1 Advisory Note: Compliance of mobile or portable transmitting equipment (100 kHz to 300 GHz).
- [11] Schmid & Partner Engineering AG (SPEAG), DASY52 System Handbook, April 2014.
- [12] Schmid & Partner Engineering AG (SPEAG), DASY8 Module SAR System Handbook, October 2022.
- [13] Schmid & Partner Engineering AG (SPEAG), DASY8 Module mmWave System Handbook, December 2022.
- [14] Schmid & Partner Engineering AG (SPEAG), Safety Data Sheet, Doc No 772-SLAAx0yy-J, June 14, 2013.
- [15] Schmid & Partner Engineering AG (SPEAG), Safety Data Sheet, Doc No 772-SLAAx1yy-I, October 18, 2013.
- [16] Schmid & Partner Engineering AG (SPEAG), Safety Data Sheet, Doc No 772-SLAAx6yy-H, September 26, 2013.
- [17] Schmid & Partner Engineering AG (SPEAG), Material Safety Data Sheet, Doc No 772-SLAAH502A-D, August 9, 2013.
- [18] Schmid & Partner Engineering AG (SPEAG), Material Safety Data Sheet, Doc No 772-SLAAx4yy-J, August 9, 2013.
- [19] Schmid & Partner Engineering AG (SPEAG), Material Safety Data Sheet, Doc No 772-SLAAHxU16B-C, June 9, 2015.

1.9. Test Facilities and Accreditation

Test Facilities

Test Facility Name	: Sony Global Manufacturing & Operations Corporation EMC/ RF Test Laboratory Main Lab.
Address	: 8-4 Shiomi Kisarazu-shi Chiba-ken, 292-0834, Japan
Shielded Room Used	: ☐ 4th Site Shielded Room 2 ☒ 4th Site Shielded Room 3

A2LA Accreditation

Certificate No.	: 3203.01
Expiration	: October 31, 2025

2. Test Set-up

2.1. Test Equipment and Measurement Software Lists

Table 2-1 Test Equipment List

Used	Control No.	Equipment Description	Model No.	Serial No.	Manufacturer	Cal. Int.	Last Cal.	Note(s)
☒	M5583	Robot	TX2-60L spe	F/24/0057614/A/002	Staubli	N/A	N/A *1	-
☐	W0082	Twin SAM Phantom	Twin SAM	TP-1325	SPEAG	N/A	N/A *1	-
☐	W0127	Twin SAM Phantom	Twin SAM	TP-1852	SPEAG	N/A	N/A *1	-
☒	W0119	ELI Phantom	ELI V5.0	1259	SPEAG	N/A	N/A *1	-
☒	M5581	mmWave Phantom	QD 015 025 CA	1122	SPEAG	N/A	N/A *1	-
☒	WA0052	E-Field Probe	EX3DV4	7452	SPEAG	1Y	2025.02.13	-
☒	WA0062	E-Field Probe	EX3DV4	7362	SPEAG	1Y	2024.07.10	-
☒	RA5007	E-Field Probe	EX3DV4	3803	SPEAG	1Y	2024.07.08	-
☐	M5580	E-Field Probe	EUmmWV4	9685	SPEAG	1Y	Under cal.	-
☒	RA5010	E-Field Probe	EUmmWV4	9470	SPEAG	1Y	2024.04.09	-
☒	W0096	Data Acquisition Electronics	DAE4	482	SPEAG	1Y	2025.01.13	-
☒	WA0026	System Validation Dipole	D2450V2	936	SPEAG	1Y	2024.06.14	-
☒	WA0028	System Validation Dipole	D5GHzV2	1183	SPEAG	1Y	2024.06.19	-
☐	A5082	System Validation Dipole	D6.5GHzV2	1109	SPEAG	1Y	Under cal.	-
☒	RA5009	System Validation Dipole	D6.5GHzV2	1103	SPEAG	1Y	2024.09.03	-
☐	A5083	Verification Source	5G Verification Source 10 GHz	1076	SPEAG	1Y	Under cal.	-
☒	RA5008	Verification Source	5G Verification Source 10 GHz	1073	SPEAG	1Y	2024.07.02	-
☒	W0121	Vector Reflectometer	DAKS_VNA R140	0111013	Copper Mountain Technologies	1Y	2024.08.16	-
☒	WA0029	Dielectric Probe	DAKS-3.5	1034	SPEAG	1Y	2024.08.07	-
☒	M1037	Signal Generator	N5173B	MY53270166	Agilent	1Y	2024.11.08	-
☐	W0122	Power Amp	CGA020M602-2633R	B40550	R&K	N/A	N/A *1	-
☒	M5582	Power Amp	RAMP01M22G A	00652106320	RF Lambda	N/A	N/A *1	-
☒	W0104	Power Sensor	U2021XA	MY54040006	Agilent	1Y	2024.11.08	-
☒	W0105	Power Sensor	U2021XA	MY54080005	Agilent	1Y	2024.11.08	-
☒	W0120	Directional Coupler	4226-20	-	narda	1Y	2024.11.08	-
☒	W0117	Attenuator	8493B 3 dB	MY39260857	Agilent	1Y	2024.11.08	-
☒	W0118	Attenuator	AT-110 10 dB	932968	Hirose	1Y	2024.11.08	-
☒	W0148	Attenuator	AT-103 3 dB	980711	Hirose	1Y	2024.11.08	-
☐	WC0022	RF Cable	SUCOFLEX 106	503094/6	HUBER+SUHNER	1Y	2024.11.08	-
☒	WC0017	RF Cable	SUCOFLEX 104	253269/4	HUBER+SUHNER	1Y	2024.11.08	-
☒	WC0024	RF Cable	SUCOFLEX 126E	MY1150/26E	HUBER+SUHNER	1Y	2024.11.08	-
☒	CA5069	RF Cable	SUCOFLEX 104	35533/4	HUBER+SUHNER	1Y	2024.11.08	-
☐	CA5071	RF Cable	SUCOFLEX 104	37196/4	HUBER+SUHNER	1Y	2024.05.12	-
☒	WC0021	RF Cable	SUCOFLEX 106	503095/6	HUBER+SUHNER	1Y	2024.11.08	-

Note(s):

* The calibration is valid until the end of the expiration month.

*1 In-house verification is conducted periodically.

Table 2-2 Test Equipment List (continued)

Used	Control No.	Equipment Description	Model No.	Serial No.	Manufacturer	Cal. Int.	Last Cal.	Note(s)
☒	M3114	Thermometer	608-H2	41403750	testo	1Y	2024.11.06	-
☐	M5189	Thermometer	608-H2	41476111	testo	1Y	Under cal.	-
☐	W0113	Water Thermometer	735-1	02788580	testo	1Y	2024.11.11	-
☒	W0116	Water Thermometer	735-1	02788596	testo	1Y	2024.07.16	-

Note(s):

* The calibration is valid until the end of the expiration month.

* 1 In-house verification is conducted periodically.

Table 2-3 Measurement Software List

Used	Control No.	Software Description	Model No.	Ver.	Manufacturer
☒	SW-5033	SAR/APD measurement software	DASY8 Module SAR	V16.4.0.5005	SPEAG
☒	SW-5034	IPD measurement software	DASY8 Module mmWave	V3.2.2.2358	SPEAG
☒	SW-0403	Dielectric measurement software	DAK	2.6.0.5	SPEAG
☒	SW-0406	SAR/APD/IPD measurement spreadsheet	-	2.00	Main Lab.
☒	SW-5035	Power measurement software	Keysight BenchVue	2024	Keysight

2.2. Measurement System Description

<SAR Measurement System>

The DASY8 system for SAR measurements consists of the following items:

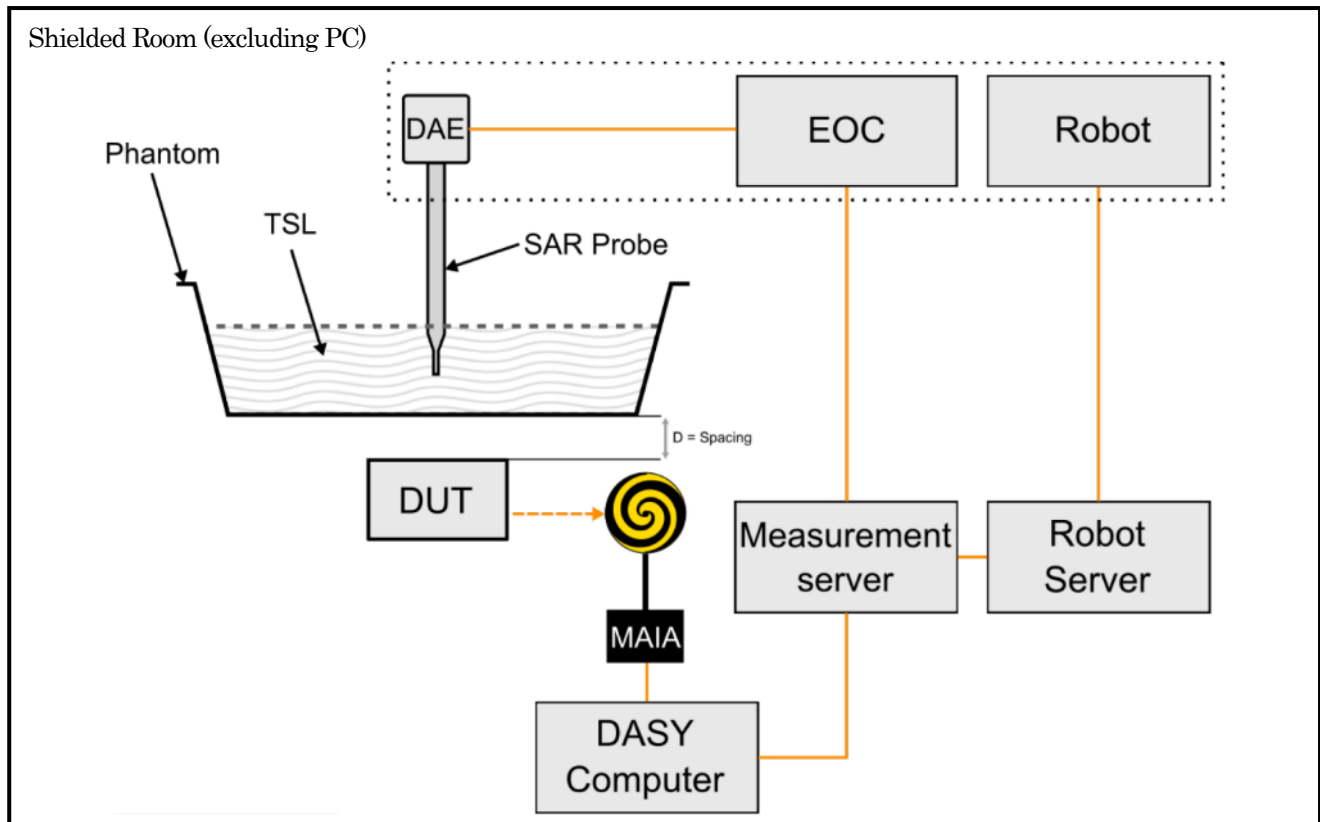


Figure 2-1 SAR Measurement System Description

- 6-axis robotic arm (Stäubli TX2-60L) for positioning the probe.
- Mounting Platform for keeping the phantoms at a fixed location relative to the robot.
- Measurement Server for handling all time-critical tasks, such as measurement data acquisition and supervision of safety features.
- EOC (Electrical to Optical Converter) for converting the optical signal from the DAE to electrical before being transmitted to the measurement server.
- LB (Light-Beam unit) for probe alignment (measurement of the exact probe length and eccentricity).
- SAR probe (EX3DV4 probes) for measuring the E-field distribution in the phantom. The SAR distribution and the psSAR (peak spatial averaged SAR) are derived from the E-field measurement.
- SAR phantom that represents a physical model with an equivalent human anatomy. A Specific Anthropomorphic Mannequin (SAM) head is usually used for handheld devices, and a Flat phantom is used for body-worn devices.
- TSL (Tissue Simulating Liquid) representing the dielectric properties of used tissue, e.g. Head Simulating Liquid, HSL.
- DAE (Data Acquisition Electronics) for reading the probe voltages and transmitting it to the DASY8 PC.
- Device Holder for positioning the DUT beneath the phantom.
- MAIA (Modulation and Interference Analyzer) for confirming the accuracy of the probe linearization parameters.
- Control PC for running the DASY8 software to define/execute the measurements.
- System validation kits for system check/validation purposes.

<IPD Measurement System>

The DASY8 system for IPD measurements consists of the following items:

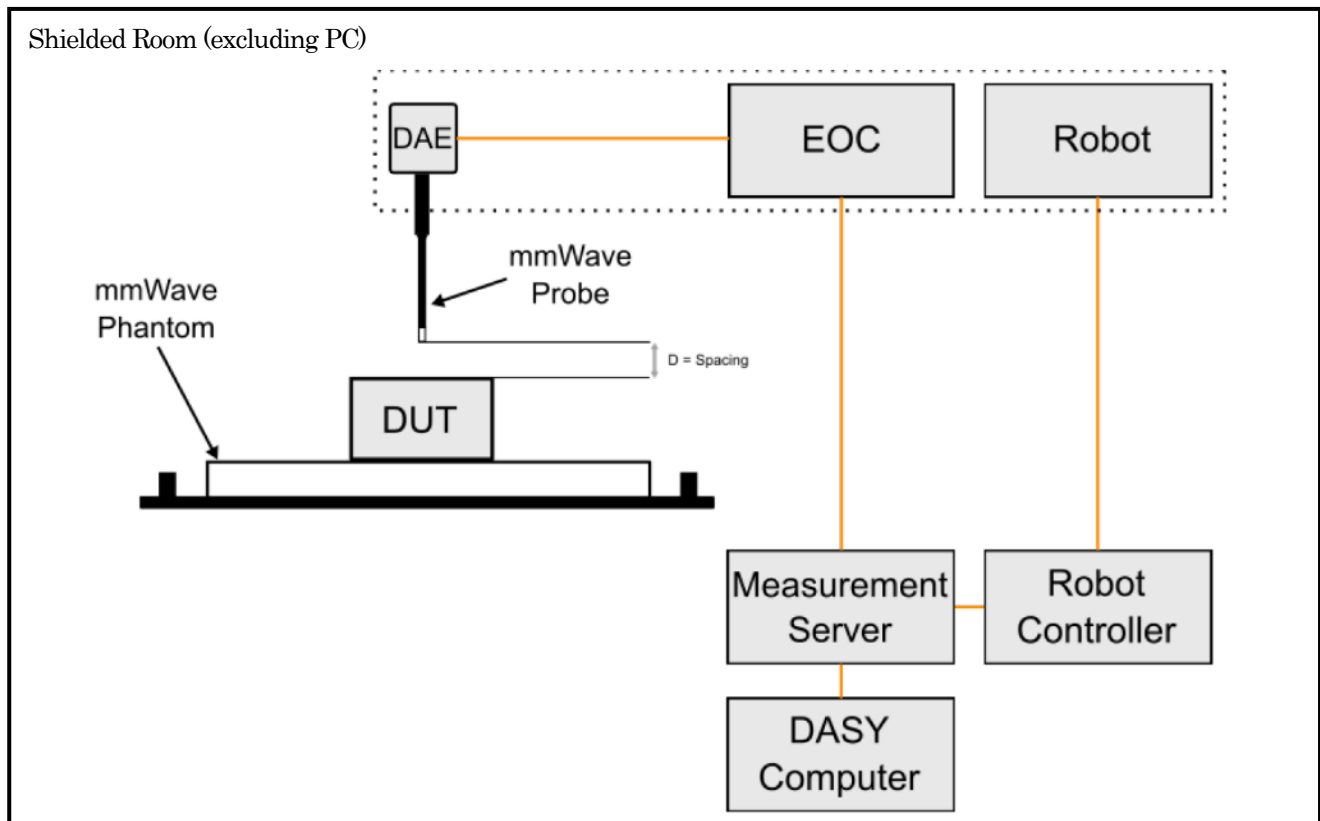


Figure 2-2

IPD Measurement System Description

- 6-axis robotic arm (Stäubli TX2-60L) for positioning the probe.
- Mounting Platform for maintaining the phantoms at a fixed location relative to the robot.
- Measurement Server that handles all time-critical tasks, such as measurement data acquisition and supervision of safety features.
- EOC (Electrical to Optical Converter) for converting the optical signal from the DAE to electrical before being transmitted to the measurement server.
- LB (Light-Beam unit) for probe alignment (measurement of the exact probe length and eccentricity).
- millimeter Wave (mmWave) probe (EummmWV4) for measuring the E-field magnitude. The polarization ellipses and the power density are then derived.
- mmWave phantom used as the test bed.
- DAE (Data Acquisition Electronics) for reading the probe voltages and transmits it to the DASY8 PC.
- mmWave Device Holder for positioning the DUT on top of the phantom.
- Control PC for running the DASY8 software for defining/executing the measurements.
- Verification sources for system performance checks.

2.3. Measurement System Main Components


Robot (Positioner)

	Shielded Room 2	Shielded Room 3
Manufacturer	Staubli SA	
Model No.	TX60L	TX2-60L
Number of Axis	6	
Reach at Wrist	920 mm	920 mm
Repeatability	+/- 0.03 mm	+/- 0.03 mm
Nominal Load Capacity	2 kg	2 kg
Maximum Load Capacity	5 kg	3.7 kg
Control Unit	CS8c	CS9c
Weight	52.2 kg	52.9 kg

E-Field Probe

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	EX3DV4
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	4 MHz to 10 GHz Linearity: ± 0.2 dB (30 MHz to 10 GHz)
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip length: 20 mm) Tip diameter: 2.5 mm (Body diameter: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

E-Field Probe

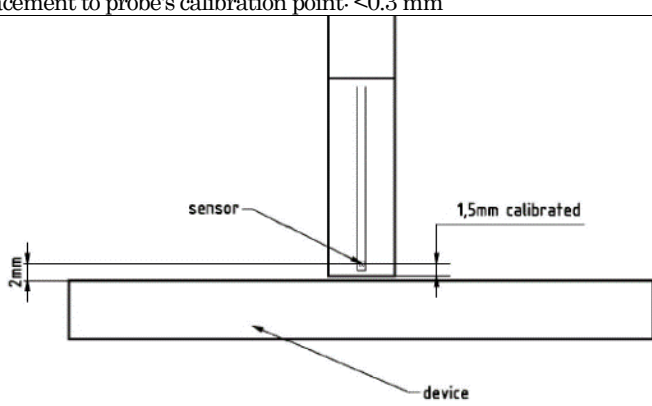Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	EUmmWV4
Construction	Two dipoles optimally arranged to obtain pseudo-vector information Minimum three measurements/point, 120° rotated around probe axis Sensors (0.8 mm length) printed on glass substrate protected by high density foam Low perturbation of the measured field Requires positioner which can do accurate probe rotation
Frequency	750 MHz to 110 GHz
Dynamic Range	<20 V/m – 10'000 V/m with PRE-10 (min <20 V/m – 2000 V/m)
Position Precision	<0.2 mm (DASY8)
Dimensions	Overall length: 320 mm (tip: 20 mm) Tip diameter: encapsulation 8 mm (internal sensor <1 mm) Distance from probe tip to dipole centers: <2 mm Sensor displacement to probe's calibration point: <0.3 mm
Distance sensor to the DUT surface	 The diagram illustrates the probe's proximity to the Device Under Test (DUT). A vertical probe is shown with its tip (labeled 'sensor') positioned 2mm above a horizontal rectangular block (labeled 'device'). A section of the probe body is marked as '1,5mm calibrated'. An arrow points from the 'device' label to the rectangular block.

Data Acquisition Electronics (DAE)

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	DAE4
Construction	High precision 3-channel differential voltmeter for use with SPEAG's field, SAR probes. Serial optical link for communication with the DASY8 measurement server. Two-step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range	-100 to +300 mV (16-bit resolution and two range settings: 4 mV, 400 mV)
Input Offset Voltage	< 5 μ V (with auto zero)
Input Resistance	200 M Ω
Input Bias Current	< 50 fA
Battery Power	> 10 hours of operation (with two 9.6 V NiMH batteries)
Dimensions (L x W x H)	60 x 60 x 68 mm

DASY8 Measurement Server

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	DASY8 Measurement Server
Description	The DASY8 measurement server establishes the connection between the DASY8 PC and the robot.

Phantoms (Twin SAM Phantom)

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	Twin SAM
Description	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEC/IEEE 62209-1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.
Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (sugar and oil based)
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet
Filling Volume	Approx. 25 liters
Support	SPEAG standard-size platform slot

Phantoms (ELI Phantom)

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	ELI V5.0
Description	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 4 MHz to 10 GHz. ELI is fully compatible with the IEC/IEC 62209-1528 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.
Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (sugar and oil based)
Shell Thickness	2.0 ± 0.2 mm (bottom plate)
Dimensions	Major axis: 600 mm Minor axis: 400 mm
Filling Volume	Approx. 30 liters
Support	SPEAG standard-size platform slot

Phantoms (mmWave Phantom)

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	QD 015 025 CA
Description	The mmWave phantom approximates free-space conditions, allowing to evaluate not only the antenna side of the device but also the front (screen) or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the radiofrequency (RF) field. It consists of a 40 mm thick Rohacell plate used as a test bed which has a loss tangent ($\tan \delta$) ≤ 0.05 and a relative permittivity (ϵ_r) ≤ 1.2 . The high-performance RF absorbers are placed below the foam. The mmWave phantom is designed to be placed into a standard slot of a DASY8 platform.

Device Holder (Mounting Device for Hand-Held Transmitters)

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	MD4HHTV5
Description	In combination with the Twin SAM or ELI Phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).
Material	Polyoxymethylene (POM)

Device Holder (Mounting Device Adaptor for Ultra Wide Transmitters)

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	MDA4WTV5
Description	An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140mm.
Material	Polyoxymethylene (POM)

Device Holder (Mounting Device Adaptor for Laptops)

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	MDA4LAP
Description	A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI Phantoms.
Material	Polyoxymethylene (POM), PET-G, Foam

System Validation Dipole Kits

Manufacturer	Schmid & Partner Engineering AG (SPEAG)		
Model No.	D-Series		
Construction	Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with tissue simulating solutions		
Frequency	2450 MHz, 5100 to 5800 MHz, and 6500 MHz		
Return Loss	> 20 dB at specified validation position		
Power Capability	> 100 W (f < 1 GHz); > 40 W (f > 1 GHz)		
Accessories	Distance holder, tripod adaptor, tripod		
Dimensions	Product	Dipole length	Overall height
	D2450V2	52.0 mm	290.0 mm
	D5GHzV2	20.6 mm	300.0 mm
	D6.5GHzV2	15.5 mm	296.0 mm

Verification Source

Manufacturer	Schmid & Partner Engineering AG (SPEAG)
Model No.	5G Verification Source 10 GHz
Construction	X-band horn antenna and supporting fixture
Frequency	10 GHz
E-field polarization	Linear
Input power	Max. 20 W
Connector	SMA
Weight	700 g

2.4. Tissue Simulating Liquids

Recipes for tissue simulating liquids manufactured by SPEAG

Ingredients (% by weight)	Frequency (MHz)					
	1900 to 3800		3500 to 5800		600 to 6000 / 10000	
Used	☐	☐	☐	☐	☒	☐
Tissue Simulating Liquids	HBBL 1900- 3800 V3	MBBL 1900- 3800 V3	HBBL 3500- 5800 V5	MBBL 3500- 5800 V5	HBBL 600- 10000 V6	MBBL 600- 6000 V6
Tissue Type	Head		Head		Head	Body
H ₂ O	50 – 73 %		50 – 65 %		60 – 80 %	
Non-ionic detergents	25 – 50 %		–		–	
NaCl	0 – 2 %		0 – 1.5 %		0 – 1.5 %	
Preventol-D7	0.05 – 0.1 %		–		–	
Ethanediol	–		–		< 5.2 %	
Sodium Petroleum Sulfonate	–		–		< 2.9 %	
Hexylene Glycol	–		–		< 2.9 %	
Alkoxylated Alcohol	–		–		< 2.0 %	
Mineral Oil	–		10 – 30 %		–	
Emulsifiers	–		8 – 25 %		20 – 40 %	

For the SAR measurement, the phantom must be filled with tissue simulating liquid to a depth of at least 15 cm.



HBBL600-10000 V6

Figure 2-3 Photos: Liquid Depth (at the center of the flat phantom)

2.5. SAR Measurement

Step 1: Power Reference Measurement

Before an area scan and after the zoom scan, single point SAR measurements are performed at defined locations to estimate the SAR measurement drift due to device output power variations.

Step 2: Area Scan

An area scan is performed according to the requirements in Table 2-3.

Step 3: Zoom Scan

A zoom scan is performed according to the requirements in Table 2-3.

Step 4: Power Drift Measurement

Before an area scan and after the zoom scan, single point SAR measurements are performed at defined locations to estimate the SAR measurement drift due to device output power variations.

Table 2-4 Area Scan and Zoom Scan Parameters

			DUT Transmit Frequency being Tested		
			$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 6 \text{ GHz}$	$6 \text{ GHz} < f \leq 8.5 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \pm 1 \text{ mm}$	$\frac{1}{2} \delta \ln(2) \pm 0.5 \text{ mm}$	$\frac{1}{2} \delta \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	$5^\circ \pm 1^\circ$ (flat phantoms only) $20^\circ \pm 1^\circ$ (other phantoms)
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$	$\leq 60 / f \text{ mm}$, or half of the corresponding zoom scan length, whichever is smaller
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}$	$\leq 24 / f \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$	$\leq 10 / (f - 1) \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$	$\leq 12 / f \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$		
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$	$\geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium.					

2.6. IPD Measurement

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the DUT in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to the DUT.

Step 2: 5G Scan

The steps in the X, Y, and Z directions are specified in terms of fractions of the signal wavelength, lambda, and according to scan parameters from SPEAG, DASY8 Module mmWave System Handbook, 5.1.3 Grid Setting.

However, for 5G Scan of the DUT, measurement area is defined according to TCB Workshop (Apr. 2019);

“A sufficiently large measurement region and proper measurement spatial resolution are required to maintain field reconstruction accuracy— Fields at the measurement region boundary should be ~20–30 dB below the peaks.”

Table 2-5 Recommended settings for measurement of verification source

Frequency (GHz)	Grid Step	Grid Extent X / Y (mm)	Measurement Points
10	0.125 ($\lambda/8$)	60 / 60	18 × 18

Step 3: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the DUT within a batch process.

When the drift is ± 5 % or less, it is considered in the uncertainty budget.

If the drift is larger than ± 5 %, the uncertainty budget shall be recalculated.

2.7. Measurement Uncertainty

☒ Table 2-6 DASY8 Uncertainty Budget for SAR Tests

For SAR Testing (IEC/IEEE 62209-1528:2020: SR3; DASY8, 0.3 GHz to 3 GHz)										
Symbol	Source of Uncertainty	Uncertainty of Xi			u(Xi)	Ci		Ciu(Xi)		Vi Veff
		Xi	Prob. Dist.	Div.		1g	10g	1g	10g	
Measurement System Errors										
CF	Probe Calibration	±11.1%	N (<i>k</i> =2)	2	±5.6%	1	1	±5.6%	±5.6%	∞
CF _{drift}	Probe Calibration Drift	±1.7%	R	1.73	±1.0%	1	1	±1.0%	±1.0%	∞
LIN	Probe Linearity	±4.7%	R	1.73	±2.7%	1	1	±2.7%	±2.7%	∞
BBS	Broadband Signal	±3.0%	R	1.73	±1.7%	1	1	±1.7%	±1.7%	∞
ISO	Probe Isotropy	±7.6%	R	1.73	±4.4%	1	1	±4.4%	±4.4%	∞
DAE	Other Probe + Electronic	±0.7%	N	1	±0.7%	1	1	±0.7%	±0.7%	∞
AMB	RF Ambient	±1.8%	N	1	±1.8%	1	1	±1.8%	±1.8%	∞
Δ _{xyz}	Probe Positioning	±0.006mm	N	1	±0.6%	0.14	0.14	±0.1%	±0.1%	∞
DAT	Data Processing	±1.2%	N	1	±1.2%	1	1	±1.2%	±1.2%	∞
Phantom and DUT Errors										
LIQ (o)	Conductivity (meas.)	±2.5%	N	1	±2.5%	0.78	0.71	±2.0%	±1.8%	∞
LIQ (T _c)	Conductivity (temp.)	±3.3%	R	1.73	±1.9%	0.78	0.71	±1.5%	±1.4%	∞
EPS	Phantom Permittivity	±14.0%	R	1.73	±8.1%	0	0	±0.0%	±0.0%	∞
DIS	Distance DUT - TSL	±2.0%	N	1	±2.0%	2	2	±4.0%	±4.0%	∞
D _{xyz}	Positioning Repeatability	±1.0%	N	1	±1.0%	1	1	±1.0%	±1.0%	∞
H	Device Holder	±3.6%	N	1	±3.6%	1	1	±3.6%	±3.6%	7
MOD	DUT Modulation	±2.4%	R	1.73	±1.4%	1	1	±1.4%	±1.4%	∞
TAS	Time-averaged SAR	±1.7%	R	1.73	±1.0%	1	1	±1.0%	±1.0%	∞
RF _{drift}	DUT Drift	±2.9%	N	1	±2.9%	1	1	±2.9%	±2.9%	∞
Corrections to the SAR result										
C(ε', o)	Deviation to Target	±1.9%	N	1	±1.9%	1	0.84	±1.9%	±1.6%	∞
C(R)	SAR Scaling	±0.0%	R	1.73	±0.0%	1	1	±0.0%	±0.0%	∞
u(ΔSAR)	Combined Standard Uncertainty RSS							±10.8%	±10.7%	574
U	Expanded Uncertainty (95% conf. interval) <i>k</i> =2							±21.7%	±21.5%	-

☒ Table 2-7

DASY8 Uncertainty Budget for SAR Tests

For SAR Testing (IEC/IEEE 62209-1528:2020; SR3; DASY8, 3 GHz to 6 GHz)										
Symbol	Source of Uncertainty	Uncertainty of Xi			u(Xi)	Ci		Ciu(Xi)		Vi Veff
		Xi	Prob. Dist.	Div.		1g	10g	1g	10g	
Measurement System Errors										
CF	Probe Calibration	±13.1%	N (<i>k</i> =2)	2	±6.6%	1	1	±6.6%	±6.6%	∞
CF _{drift}	Probe Calibration Drift	±1.7%	R	1.73	±1.0%	1	1	±1.0%	±1.0%	∞
LIN	Probe Linearity	±4.7%	R	1.73	±2.7%	1	1	±2.7%	±2.7%	∞
BBS	Broadband Signal	±2.6%	R	1.73	±1.5%	1	1	±1.5%	±1.5%	∞
ISO	Probe Isotropy	±7.6%	R	1.73	±4.4%	1	1	±4.4%	±4.4%	∞
DAE	Other Probe + Electronic	±1.2%	N	1	±1.2%	1	1	±1.2%	±1.2%	∞
AMB	RF Ambient	±1.8%	N	1	±1.8%	1	1	±1.8%	±1.8%	∞
Δ _{xyz}	Probe Positioning	±0.005mm	N	1	±0.5%	0.28	0.28	±0.2%	±0.2%	∞
DAT	Data Processing	±2.3%	N	1	±2.3%	1	1	±2.3%	±2.3%	∞
Phantom and DUT Errors										
LIQ (o)	Conductivity (meas.)	±2.5%	N	1	±2.5%	0.78	0.71	±2.0%	±1.8%	∞
LIQ (T _c)	Conductivity (temp.)	±3.4%	R	1.73	±1.9%	0.78	0.71	±1.5%	±1.4%	∞
EPS	Phantom Permittivity	±14.0%	R	1.73	±8.1%	0.25	0.25	±2.0%	±2.0%	∞
DIS	Distance DUT - TSL	±2.0%	N	1	±2.0%	2	2	±4.0%	±4.0%	∞
D _{xyz}	Positioning Repeatability	±1.0%	N	1	±1.0%	1	1	±1.0%	±1.0%	∞
H	Device Holder	±3.6%	N	1	±3.6%	1	1	±3.6%	±3.6%	7
MOD	DUT Modulation	±2.4%	R	1.73	±1.4%	1	1	±1.4%	±1.4%	∞
TAS	Time-averaged SAR	±1.7%	R	1.73	±1.0%	1	1	±1.0%	±1.0%	∞
RF _{drift}	DUT Drift	±2.9%	N	1	±2.9%	1	1	±2.9%	±2.9%	∞
Corrections to the SAR result										
C(ε', o)	Deviation to Target	±1.9%	N	1	±1.9%	1	0.84	±1.9%	±1.6%	∞
C(R)	SAR Scaling	±0.0%	R	1.73	±0.0%	1	1	±0.0%	±0.0%	∞
u(ΔSAR)	Combined Standard Uncertainty RSS							±11.7%	±11.7%	792
U	Expanded Uncertainty (95% conf. interval)				<i>k</i> =2			±23.5%	±23.3%	-

☒ Table 2-8 DASY8 Uncertainty Budget for SAR Tests

For SAR Testing (IEC/IEEE 62209-1528:2020; SR3; DASY8, 6 GHz to 10 GHz)											
Symbol	Source of Uncertainty	Uncertainty of Xi			u(Xi)	Ci		Ciu(Xi)		Vi Veff	
		Xi	Prob. Dist.	Div.		1g	10g	1g	10g		
Measurement System Errors											
CF	Probe Calibration	±18.6%	N (<i>k</i> =2)	2	±9.3%	1	1	±9.3%	±9.3%	∞	
CF _{drift}	Probe Calibration Drift	±1.7%	R	1.73	±1.0%	1	1	±1.0%	±1.0%	∞	
LIN	Probe Linearity	±4.7%	R	1.73	±2.7%	1	1	±2.7%	±2.7%	∞	
BBS	Broadband Signal	±2.8%	R	1.73	±1.6%	1	1	±1.6%	±1.6%	∞	
ISO	Probe Isotropy	±7.6%	R	1.73	±4.4%	1	1	±4.4%	±4.4%	∞	
DAE	Other Probe + Electronic	±2.4%	N	1	±2.4%	1	1	±2.4%	±2.4%	∞	
AMB	RF Ambient	±1.8%	N	1	±1.8%	1	1	±1.8%	±1.8%	∞	
Δ _{xyz}	Probe Positioning	±0.005mm	N	1	±0.5%	0.50	0.50	±0.2%	±0.2%	∞	
DAT	Data Processing	±3.5%	N	1	±3.5%	1	1	±3.5%	±3.5%	∞	
Phantom and DUT Errors											
LIQ (o)	Conductivity (meas.)	±2.5%	N	1	±2.5%	0.78	0.71	±2.0%	±1.8%	∞	
LIQ (T _c)	Conductivity (temp.)	±2.4%	R	1.73	±1.4%	0.78	0.71	±1.1%	±1.0%	∞	
EPS	Phantom Permittivity	±14.0%	R	1.73	±8.1%	0.50	0.50	±4.0%	±4.0%	∞	
DIS	Distance DUT - TSL	±2.0%	N	1	±2.0%	2	2	±4.0%	±4.0%	∞	
D _{xyz}	Positioning Repeatability	±1.0%	N	1	±1.0%	1	1	±1.0%	±1.0%	∞	
H	Device Holder	±3.6%	N	1	±3.6%	1	1	±3.6%	±3.6%	7	
MOD	DUT Modulation	±2.4%	R	1.73	±1.4%	1	1	±1.4%	±1.4%	∞	
TAS	Time-averaged SAR	±1.7%	R	1.73	±1.0%	1	1	±1.0%	±1.0%	∞	
RF _{drift}	DUT Drift	±2.9%	N	1	±2.9%	1	1	±2.9%	±2.9%	∞	
Corrections to the SAR result											
C(ε', o)	Deviation to Target	±1.9%	N	1	±1.9%	1	0.84	±1.9%	±1.6%	∞	
C(R)	SAR Scaling	±0.0%	R	1.73	±0.0%	1	1	±0.0%	±0.0%	∞	
u(ΔSAR)	Combined Standard Uncertainty					RSS			±14.3%	±14.2%	1734
U	Expanded Uncertainty (95% conf. interval)					<i>k</i> =2			±28.6%	±28.4%	-

☒ Table 2-9 DASY8 Uncertainty Budget for SAR System Check

For SAR System Check (IEC/IEEE 62209-1528:2020; SR3; DASY8, 0.3 GHz to 6 GHz)										
Symbol	Source of Uncertainty	Uncertainty of Xi			u(Xi)	Ci		Ciu(Xi)		Vi Veff
		Xi	Prob. Dist.	Div.		1g	10g	1g	10g	
Measurement System Errors										
CF	Probe Calibration	±13.1%	N (<i>k</i> =2)	2	±6.6%	1	1	±6.6%	±6.6%	∞
CF _{drift}	Probe Calibration Drift	±1.7%	R	1.73	±1.0%	1	1	±1.0%	±1.0%	∞
LIN	Probe Linearity	±4.7%	R	1.73	±2.7%	1	1	±2.7%	±2.7%	∞
BBS	Broadband Signal	±0.0%	N (<i>k</i> =2)	2	±0.0%	1	1	±0.0%	±0.0%	∞
ISO	Probe Isotropy (axial)	±4.7%	R	1.73	±2.7%	1	1	±2.7%	±2.7%	∞
DAE	Other Probe + Electronic	±1.2%	N	1	±1.2%	1	1	±1.2%	±1.2%	∞
AMB	RF Ambient	±0.6%	N	1	±0.6%	1	1	±0.6%	±0.6%	∞
Δ _{xyz}	Probe Positioning	±0.005mm	N	1	±0.5%	0.28	0.28	±0.2%	±0.2%	∞
DAT	Data Processing	±0.6%	N	1	±0.6%	1	1	±0.6%	±0.6%	∞
Phantom and DUT Errors										
LIQ (o)	Conductivity (meas.)	±2.5%	N	1	±2.5%	0.78	0.71	±2.0%	±1.8%	∞
LIQ (T _e)	Conductivity (temp.)	±3.4%	R	1.73	±1.9%	0.78	0.71	±1.5%	±1.4%	∞
EPS	Phantom Permittivity	±14.0%	R	1.73	±8.1%	0.25	0.25	±2.0%	±2.0%	∞
DIS	Distance DUT - TSL	±1.3%	N	1	±1.3%	2	2	±2.6%	±2.6%	∞
D _{xyz}	Positioning Repeatability	±1.2%	N	1	±1.2%	1	1	±1.2%	±1.2%	∞
MOD	DUT Modulation	±0.0%	R	1.73	±0.0%	1	1	±0.0%	±0.0%	∞
TAS	Time-averaged SAR	±0.0%	R	1.73	±0.0%	1	1	±0.0%	±0.0%	∞
VAL	Validation Antenna	±3.2%	N	1	±3.2%	1	1	±3.2%	±3.2%	∞
P _{in}	Accepted Power	±2.0%	N	1	±2.0%	1	1	±2.0%	±2.0%	∞
Corrections to the SAR result										
C(ε', o)	Deviation to Target	±1.9%	N	1	±1.9%	1	0.84	±1.9%	±1.6%	∞
u(ΔSAR)	Combined Standard Uncertainty RSS							±9.8%	±9.7%	∞
U	Expanded Uncertainty (95% conf. interval) <i>k</i> =2							±19.7%	±19.5%	-

☒ Table 2-10 DASY8 Uncertainty Budget for SAR System Check

For SAR System Check (IEC/IEEE 62209-1528:2020; SR3; DASY8, 6 GHz to 10 GHz)										
Symbol	Source of Uncertainty	Uncertainty of Xi			u(Xi)	Ci		Ciu(Xi)		Vi Veff
		Xi	Prob. Dist.	Div.		1g	10g	1g	10g	
Measurement System Errors										
CF	Probe Calibration	±18.6%	N (<i>k</i> =2)	2	±9.3%	1	1	±9.3%	±9.3%	∞
CF _{drift}	Probe Calibration Drift	±1.7%	R	1.73	±1.0%	1	1	±1.0%	±1.0%	∞
LIN	Probe Linearity	±4.7%	R	1.73	±2.7%	1	1	±2.7%	±2.7%	∞
BBS	Broadband Signal	±0.0%	N (<i>k</i> =2)	2	±0.0%	1	1	±0.0%	±0.0%	∞
ISO	Probe Isotropy (axial)	±4.7%	R	1.73	±2.7%	1	1	±2.7%	±2.7%	∞
DAE	Other Probe + Electronic	±2.4%	N	1	±2.4%	1	1	±2.4%	±2.4%	∞
AMB	RF Ambient	±0.6%	N	1	±0.6%	1	1	±0.6%	±0.6%	∞
Δ _{xyz}	Probe Positioning	±0.005mm	N	1	±0.5%	0.50	0.50	±0.2%	±0.2%	∞
DAT	Data Processing	±0.6%	N	1	±0.6%	1	1	±0.6%	±0.6%	∞
Phantom and DUT Errors										
LIQ (σ)	Conductivity (meas.)	±2.5%	N	1	±2.5%	0.78	0.71	±2.0%	±1.8%	∞
LIQ (T _c)	Conductivity (temp.)	±3.4%	R	1.73	±1.9%	0.78	0.71	±1.5%	±1.4%	∞
EPS	Phantom Permittivity	±14.0%	R	1.73	±8.1%	0.50	0.50	±4.0%	±4.0%	∞
DIS	Distance DUT - TSL	±2.6%	N	1	±2.6%	2	2	±5.2%	±5.2%	∞
D _{xyz}	Positioning Repeatability	±1.2%	N	1	±1.2%	1	1	±1.2%	±1.2%	∞
MOD	DUT Modulation	±0.0%	R	1.73	±0.0%	1	1	±0.0%	±0.0%	∞
TAS	Time-averaged SAR	±0.0%	R	1.73	±0.0%	1	1	±0.0%	±0.0%	∞
VAL	Validation Antenna	±3.2%	N	1	±3.2%	1	1	±3.2%	±3.2%	∞
P _{in}	Accepted Power	±2.0%	N	1	±2.0%	1	1	±2.0%	±2.0%	∞
Corrections to the SAR result										
C(ε', σ)	Deviation to Target	±1.9%	N	1	±1.9%	1	0.84	±1.9%	±1.6%	∞
u(ΔSAR)	Combined Standard Uncertainty RSS							±13.3%	±13.2%	∞
U	Expanded Uncertainty (95% conf. interval) <i>k</i> =2							±26.6%	±26.5%	-

☒ Table 2-11 DASY8 Uncertainty Budget for APD Tests

For APD Testing (IEC PAS 63446:2022; SR3; DASY8, 6 GHz to 10 GHz)										
Symbol	Source of Uncertainty	Uncertainty of Xi			u(Xi)	Ci		Ciu(Xi)		Vi Veff
		Xi	Prob. Dist.	Div.		1g / 1cm ²	8g / 10g / 4cm ²	1g / 1cm ²	8g / 10g / 4cm ²	
u(ASAR)	CSU of SAR Testing (1g)	±14.3%	N	1	±14.3%	1	0	±14.3%	±0.0%	∞
u(ASAR)	CSU of SAR Testing (10g)	±14.2%	N	1	±14.2%	0	1	±0.0%	±14.2%	∞
PDC	SAR to APD Conversion	±13.5%	R	1.73	±7.8%	1	1	±7.8%	±7.8%	∞
u(AAPD)	Combined Standard Uncertainty RSS							±16.3%	±16.2%	∞
U	Expanded Uncertainty (95% conf. interval) k=2							±32.5%	±32.4%	-
	Expanded Uncertainty (95% conf. interval) k=2 in dB							+1.22 dB	+1.22 dB	-
								-1.71 dB	-1.70 dB	-

☒ Table 2-12 DASY8 Uncertainty Budget for IPD Tests


For IPD Testing (IEC/IEEE 63195-1:2022; SR3; DASY8, 6 GHz to 10 GHz)								
Symbol	Source of Uncertainty	Uncertainty of Xi			u(Xi)	Ci	Ciu(Xi)	Vi Veff
		Xi	Prob. Dist.	Div.				
Measurement System Errors								
CAL	Calibration	±0.49 dB	N	1	±0.49 dB	1	±0.49 dB	∞
COR	Probe Correction	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
FRS	Frequency Response (BW of 1 GHz or less)	±0.20 dB	R	1.73	±0.12 dB	1	±0.12 dB	∞
SCC	Sensor Cross Coupling	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
ISO	Isotropy	±0.50 dB	R	1.73	±0.29 dB	1	±0.29 dB	∞
LIN	Linearity	±0.20 dB	R	1.73	±0.12 dB	1	±0.12 dB	∞
PSC	Probe Scattering	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
PPO	Probe Positioning Offset	±0.30 dB	R	1.73	±0.17 dB	1	±0.17 dB	∞
PPR	Probe Positioning Repeatability	±0.04 dB	R	1.73	±0.02 dB	1	±0.02 dB	∞
SMO	Sensor Mechanical Offset	±0.02 dB	R	1.73	±0.01 dB	1	±0.01 dB	∞
PSR	Probe Spatial Resolution	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
FLD	Field Impedance Dependence	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
APD	Amplitude and Phase Drift	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
APN	Amplitude and Phase Noise	±0.04 dB	R	1.73	±0.02 dB	1	±0.02 dB	∞
TR	Measurement Area Truncation	±0.10 dB	R	1.73	±0.06 dB	1	±0.06 dB	∞
DAQ	Data Acquisition	±0.03 dB	N	1	±0.03 dB	1	±0.03 dB	∞
SMP	Sampling	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
REC	Field Reconstruction	±0.60 dB	R	1.73	±0.35 dB	1	±0.35 dB	∞
TRA	Forward Transformation Using FTE and MEO	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
SCA	Power Density Scaling	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
SAV	Spatial Averaging	±0.10 dB	R	1.73	±0.06 dB	1	±0.06 dB	∞
SDL	System Detection Limit	±0.04 dB	R	1.73	±0.02 dB	1	±0.02 dB	∞
DUT and Environmental Factors								
PC	Probe Coupling with DUT	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
MOD	Modulation Response	±0.40 dB	R	1.73	±0.23 dB	1	±0.23 dB	∞
IT	Integration Time	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
RT	Response Time	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
DH	Device Holder Influence	±0.10 dB	R	1.73	±0.06 dB	1	±0.06 dB	∞
DA	DUT Alignment	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
AC	RF Ambient Conditions	±0.04 dB	R	1.73	±0.03 dB	1	±0.03 dB	∞
REF	Ambient Reflections	±0.09 dB	R	1.73	±0.05 dB	1	±0.05 dB	∞
MSI	Immunity / Secondary Reception	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞
DRI	Drift of DUT	±0.22 dB	R	1.73	±0.13 dB	1	±0.13 dB	∞
u(ΔIPD)	Combined Standard Uncertainty				RSS		±0.77 dB	∞
U	Expanded Uncertainty (95% conf. interval)				k=2		±1.53 dB	-
	Expanded Uncertainty (95% conf. interval)				k=2		in dB	
							+42.3 %	-
						-29.7 %	-	

☒ Table 2-13 DASY8 Uncertainty Budget for IPD System Check


For IPD System Check (IEC/IEEE 63195-1:2022: SR3; DASY8, 6 GHz to 10 GHz)									
Symbol	Source of Uncertainty	Uncertainty of Xi			u(Xi)	Ci	Ciu(Xi)	Vi Veff	
		Xi	Prob. Dist.	Div.					
Measurement System Errors									
CAL	Calibration	±0.21 dB	N	1	±0.21 dB	1	±0.21 dB	∞	
COR	Probe Correction	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
FRS	Frequency Response (BW of 1 GHz or less)	±0.20 dB	R	1.73	±0.12 dB	0	±0.00 dB	∞	
SCC	Sensor Cross Coupling	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
ISO	Isotropy	±0.30 dB	R	1.73	±0.17 dB	1	±0.17 dB	∞	
LIN	Linearity	±0.20 dB	R	1.73	±0.12 dB	1	±0.12 dB	∞	
PSC	Probe Scattering	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
PPO	Probe Positioning Offset	±0.06 dB	R	1.73	±0.03 dB	1	±0.03 dB	∞	
PPR	Probe Positioning Repeatability	±0.04 dB	R	1.73	±0.02 dB	1	±0.02 dB	∞	
SMO	Sensor Mechanical Offset	±0.02 dB	R	1.73	±0.01 dB	1	±0.01 dB	∞	
PSR	Probe Spatial Resolution	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
FLD	Field Impedance Dependence	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
APD	Amplitude and Phase Drift	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
APN	Amplitude and Phase Noise	±0.04 dB	R	1.73	±0.02 dB	0	±0.00 dB	∞	
TR	Measurement Area Truncation	±0.10 dB	R	1.73	±0.06 dB	1	±0.06 dB	∞	
DAQ	Data Acquisition	±0.03 dB	N	1	±0.03 dB	1	±0.03 dB	∞	
SMP	Sampling	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
REC	Field Reconstruction	±0.60 dB	R	1.73	±0.35 dB	0.3	±0.10 dB	∞	
TRA	Forward Transformation Using FTE and MEO	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
SCA	Power Density Scaling	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
SAV	Spatial Averaging	±0.10 dB	R	1.73	±0.06 dB	0	±0.00 dB	∞	
SDL	System Detection Limit	±0.04 dB	R	1.73	±0.02 dB	1	±0.02 dB	∞	
DUT and Environmental Factors									
PC	Probe Coupling with DUT	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
MOD	Modulation Response	±0.40 dB	R	1.73	±0.23 dB	0	±0.00 dB	∞	
IT	Integration Time	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
RT	Response Time	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
DH	Device Holder Influence	±0.10 dB	R	1.73	±0.06 dB	0	±0.00 dB	∞	
DA	DUT Alignment	±0.00 dB	R	1.73	±0.00 dB	1	±0.00 dB	∞	
AC	RF Ambient Conditions	±0.04 dB	R	1.73	±0.03 dB	1	±0.03 dB	∞	
REF	Ambient Reflections	±0.09 dB	R	1.73	±0.05 dB	1	±0.05 dB	∞	
MSI	Immunity / Secondary Reception	±0.00 dB	R	1.73	±0.00 dB	0	±0.00 dB	∞	
DRI	Drift of DUT	±0.22 dB	R	1.73	±0.13 dB	1	±0.13 dB	∞	
u(AIPD)	Combined Standard Uncertainty					RSS		±0.35 dB	∞
U	Expanded Uncertainty (95% conf. interval)					k=2		±0.71 dB	-
	Expanded Uncertainty (95% conf. interval)					k=2		in dB	
								+17.7 %	-
							-15.0 %	-	

2.8. Dielectric Parameter Measurement of Tissue Simulating Liquids

The dielectric properties of the tissue simulating liquids used were verified within 24 hours before the SAR measurement.

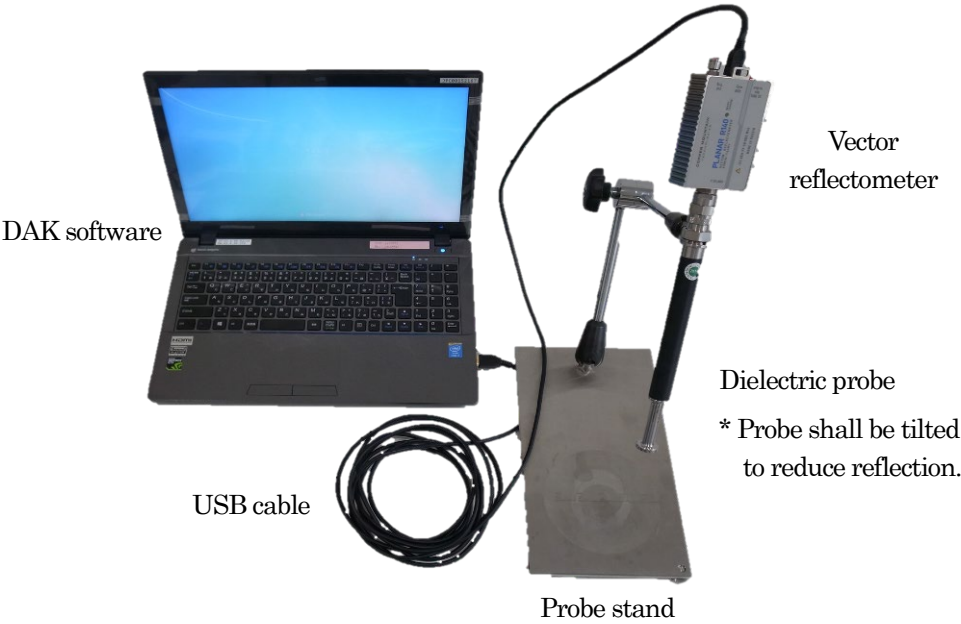

(a) Dielectric Parameter Measurement System

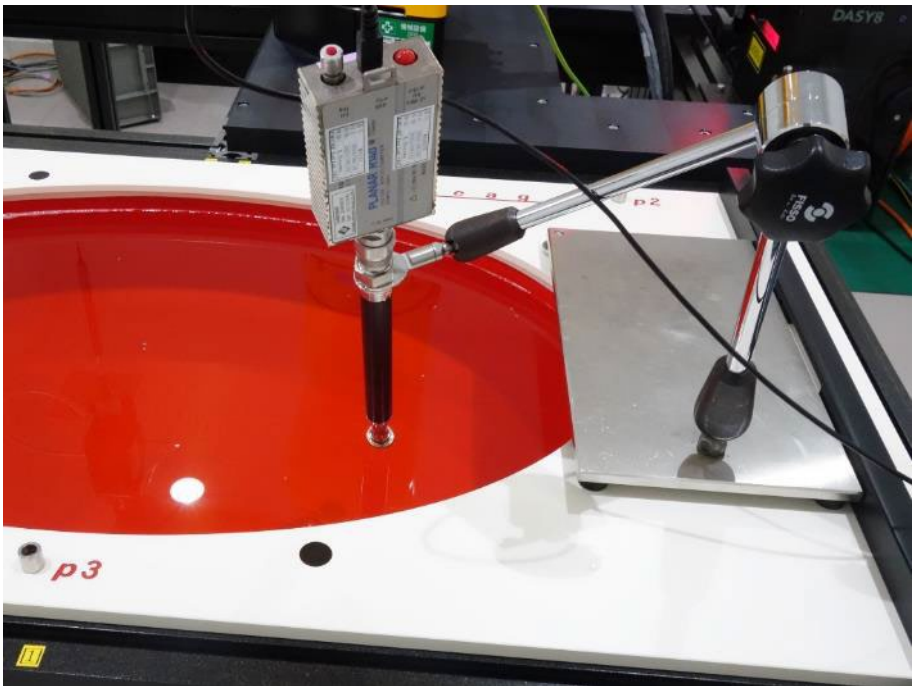

(b) Example Photo: Dielectric Parameter Measurement

Figure 2-4 Dielectric Parameter Measurement Set-up

4th Site Shielded Room 3

TSL	Freq. (MHz)	Param.	Target *1	Meas.	Dev. (%) *2	Date	Amb. Temp. (deg. C)	Rel. Hum. (%RH)	Liquid Temp. (deg. C)	Note(s)
HBBL 600-10000 V6	2402	ϵ_r	39.29	40.72	3.66	2025/02/18	21.7	38.2	20.4	-
		σ (S/m)	1.76	1.72	-2.38					
	2412	ϵ_r	39.27	40.70	3.66	2025/02/18	21.7	38.2	20.4	-
		σ (S/m)	1.77	1.72	-2.42					
	2437	ϵ_r	39.22	40.67	3.69	2025/02/18	21.7	38.2	20.4	-
		σ (S/m)	1.79	1.74	-2.52					
	2440	ϵ_r	39.22	40.66	3.69	2025/02/18	21.7	38.2	20.4	-
		σ (S/m)	1.79	1.75	-2.52					
	2441	ϵ_r	39.22	40.66	3.69	2025/02/18	21.7	38.2	20.4	-
		σ (S/m)	1.79	1.75	-2.52					
	2462	ϵ_r	39.18	40.63	3.68	2025/02/18	21.7	38.2	20.4	-
		σ (S/m)	1.81	1.76	-2.69					
	2480	ϵ_r	39.16	40.61	3.69	2025/02/18	21.7	38.2	20.4	-
		σ (S/m)	1.83	1.78	-2.84					
	5250	ϵ_r	35.93	36.39	1.29	2025/03/04	20.5	40.3	19.5	-
		σ (S/m)	4.71	4.61	-2.00					
	5570	ϵ_r	35.56	35.57	0.03	2025/03/05	23.1	42.7	20.1	-
		σ (S/m)	5.03	4.90	-2.58					
	5775	ϵ_r	35.33	36.37	2.94	2025/03/04	20.5	40.3	19.5	-
		σ (S/m)	5.24	5.19	-0.95					
	5775	ϵ_r	35.33	34.82	-1.44	2025/03/21	21.3	48.1	19.2	-
		σ (S/m)	5.24	5.21	-0.57					
	6025	ϵ_r	35.04	34.23	-2.31	2025/02/19	21.3	35.5	20.0	-
		σ (S/m)	5.51	5.49	-0.36					
	6025	ϵ_r	35.04	34.00	-2.97	2025/03/25	19.8	59.3	19.7	-
		σ (S/m)	5.51	5.34	-3.09					
	6185	ϵ_r	34.84	34.15	-1.98	2025/02/19	21.3	35.5	20.0	-
		σ (S/m)	5.71	5.68	-0.53					
	6185	ϵ_r	34.84	35.69	2.44	2025/02/20	20.7	37.8	20.2	-
		σ (S/m)	5.71	5.55	-2.80					
	6505	ϵ_r	34.45	35.26	2.35	2025/02/20	20.7	37.8	20.2	-
		σ (S/m)	6.08	5.97	-1.81					
	6665	ϵ_r	34.27	34.68	1.20	2025/02/20	20.7	37.8	20.2	-
		σ (S/m)	6.26	6.19	-1.12					
	6985	ϵ_r	33.90	32.48	-4.19	2025/02/25	21.0	36.9	20.1	-
		σ (S/m)	6.63	6.68	0.75					


*1 Target values are linearly interpolated between the values defined in IEEE Std 1528, when necessary.

*2 The deviation of measured values from target values must be within +/-5 %.


2.9. System Check Measurement

<SAR Measurement System Check>

The system check was performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium.

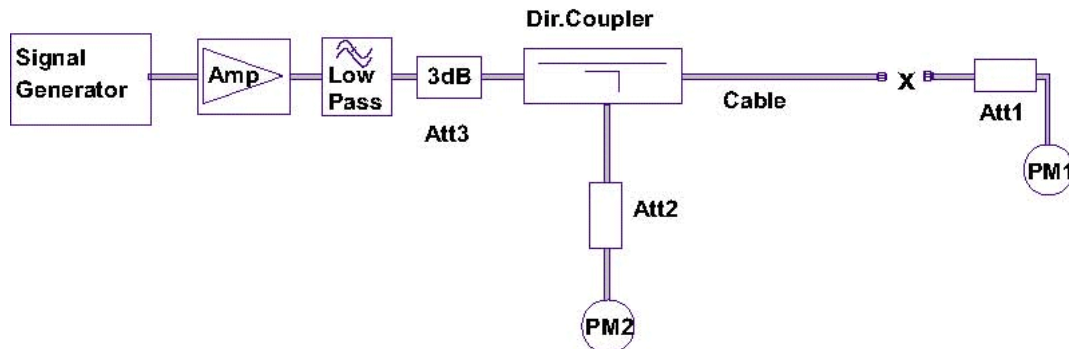


(a) System set-up 1

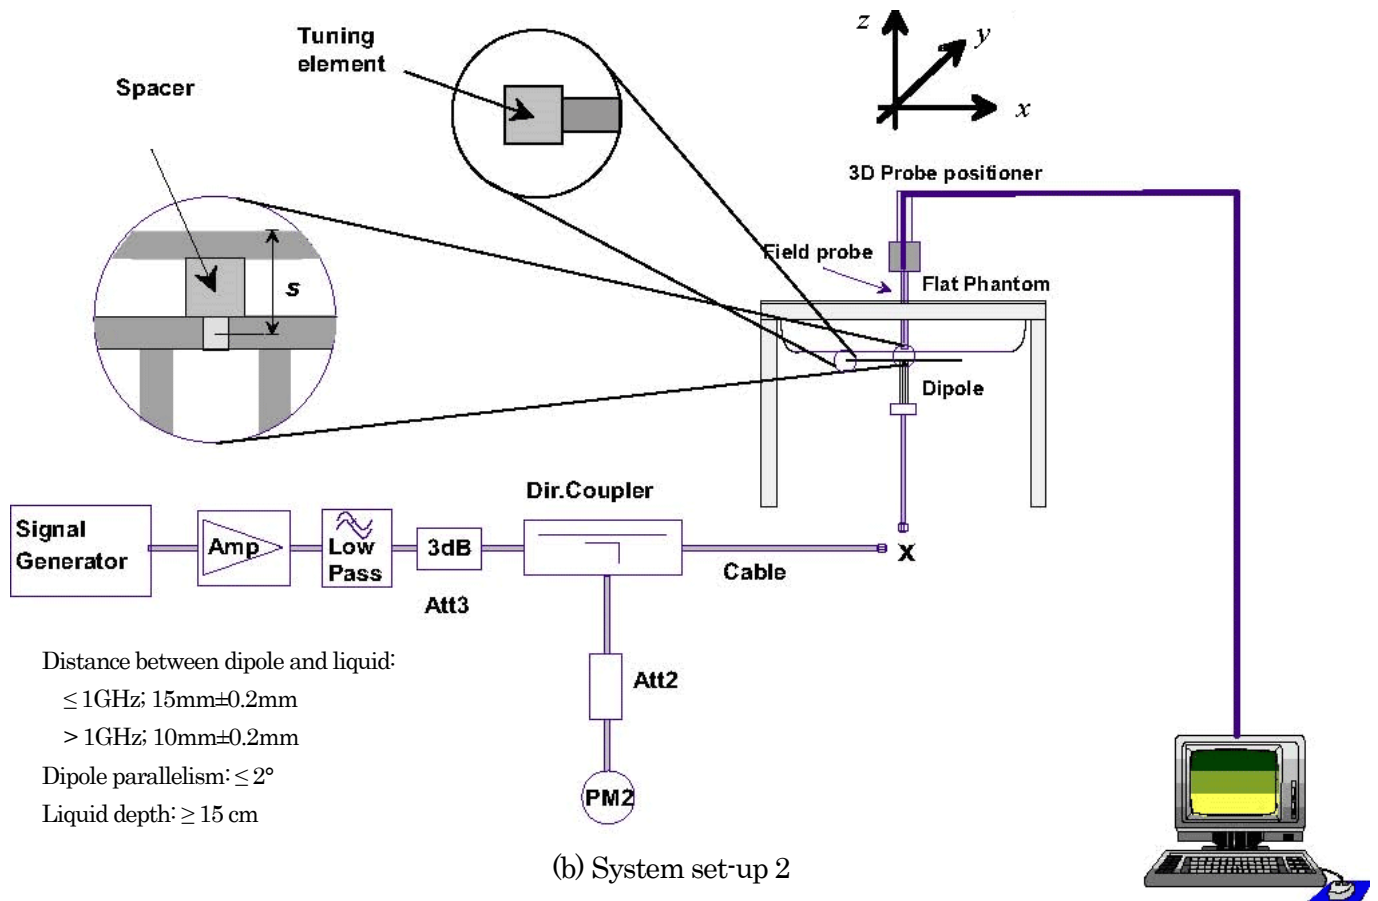


(b) System set-up 2

Figure 2-5


SAR System Check Measurement Set-up

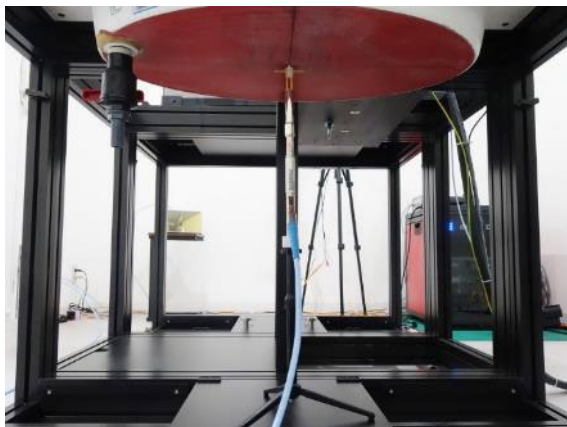

D2450V2

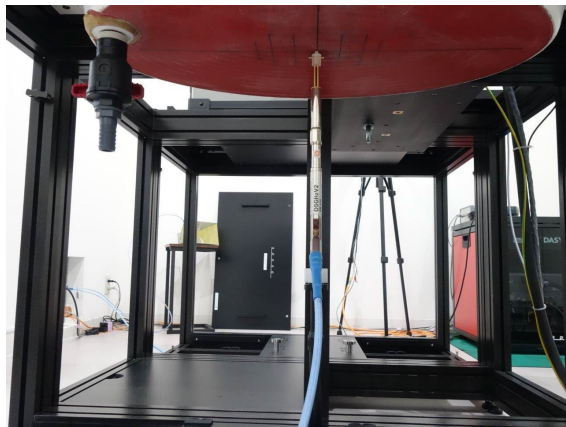

D5GHzV2

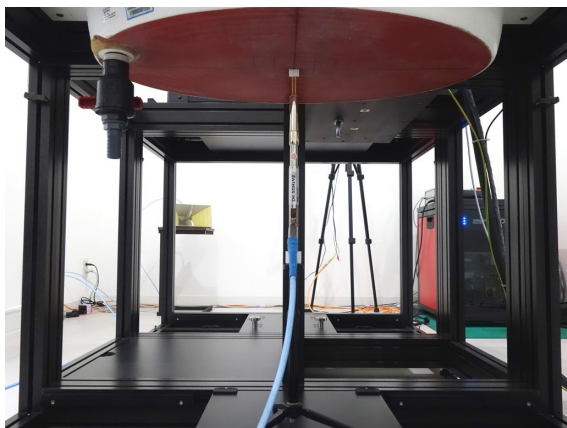

D6.5GHzV2

(c) Photo: System Validation Dipole Placement

Figure 2-5 SAR System Check Measurement Set-up (continued)

4th Site Shielded Room 3

System Validation Dipole	Freq. (MHz)	Param.	250 mW- Meas. (W/kg)	1 W- Norm. (W/kg) *1	1 W- Target (W/kg) *2	Dev. (%) *3	Date	Amb. Temp. (deg. C)	Rel. Hum. (%RH)	Liquid Temp. (deg. C)	Note(s)
D2450V2	2450	1-g SAR	13.90	55.60	53.60	3.73	2025/02/18	21.4	38.2	20.4	-
		10-g SAR	6.45	25.80	25.10	2.79					

System Validation Dipole	Freq. (MHz)	Param.	100 mW- Meas. (W/kg)	1 W- Norm. (W/kg) *1	1 W- Target (W/kg) *2	Dev. (%) *3	Date	Amb. Temp. (deg. C)	Rel. Hum. (%RH)	Liquid Temp. (deg. C)	Note(s)
D5GHzV2	5200	1-g SAR	7.44	74.40	77.50	-4.00	2025/03/04	20.5	40.3	19.5	-
		10-g SAR	2.14	21.40	22.10	-3.17					
D5GHzV2	5600	1-g SAR	7.99	79.90	82.30	-2.92	2025/03/05	23.1	42.7	20.1	-
		10-g SAR	2.26	22.60	23.40	-3.42					
D5GHzV2	5800	1-g SAR	7.40	74.00	79.30	-6.68	2025/03/04	21.4	45.3	19.5	-
		10-g SAR	2.11	21.10	22.40	-5.80					
D5GHzV2	5800	1-g SAR	7.77	77.70	79.30	-2.02	2025/03/21	22.0	43.3	19.5	-
		10-g SAR	2.21	22.10	22.40	-1.34					

System Validation Dipole	Freq. (MHz)	Param.	100 mW- Meas. (W/kg)	1 W- Norm. (W/kg) *1	1 W- Target (W/kg) *2	Dev. (%) *3	Date	Amb. Temp. (deg. C)	Rel. Hum. (%RH)	Liquid Temp. (deg. C)	Note(s)
D6.5GHzV2	6500	1-g SAR	29.90	299.00	295.00	1.36	2025/02/19	21.3	36.0	20.0	-
		8-g SAR	6.76	67.60	66.40	1.81					
		10-g SAR	5.59	55.90	54.40	2.76					
D6.5GHzV2	6500	1-g SAR	30.40	304.00	295.00	3.05	2025/02/20	20.7	37.8	20.2	-
		8-g SAR	6.84	68.40	66.40	3.01					
		10-g SAR	5.68	56.80	54.40	4.41					
D6.5GHzV2	6500	1-g SAR	29.80	298.00	295.00	1.02	2025/02/25	21.0	36.6	20.1	-
		8-g SAR	6.69	66.90	66.40	0.75					
		10-g SAR	5.53	55.30	54.40	1.65					
D6.5GHzV2	6500	1-g SAR	29.40	294.00	295.00	-0.34	2025/03/25	19.8	59.3	19.7	-
		8-g SAR	6.64	66.40	66.40	0.00					
		10-g SAR	5.48	54.80	54.40	0.74					

*1 The normalized values (1 W) were calculated by normalizing the measured values to 1-W forward input power.

*2 The target values (1 W) are defined in IEEE Std 1528 and/or the calibration certificate of system validation dipoles used.

*3 The deviation of normalized values from target values must be within +/-10 %.


<IPD Measurement System Check>

According to TCB Workshop (Nov. 2017),

the system check was performed before each series of IPD measurement and, as applicable, repeated at least weekly. Peak and spatially averaged power density at the peak location(s) must be compared to calibrated results according to the defined test conditions.

- the same spatial resolution and measurement region used in the source calibration was applied.
- the measured power density distribution was also be verified through visual inspection for noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer.
- the measured results should be within 10% of the calibrated targets.

The minimum distance from the horn antenna aperture to the measured plane (probe sensors) is 10 mm.

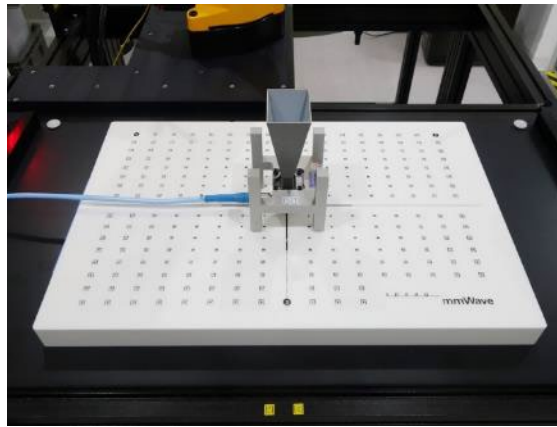

5G Verification Source 10 GHz

Figure 2-6 IPD System Check Measurement Set-up

4th Site Shielded Room 3

Verification Source	Freq. (GHz)	Prad (mW) *1	Param.	Meas. (W/m ² over 4 cm ²)	Target (W/m ² over 4 cm ²)	Dev. (%) *4	Meas. Avg. (W/m ² over 4 cm ²) *2	Target Avg. (W/m ² over 4 cm ²) *3	Dev. (%) *4	Date	Amb. Temp. (deg. C)	Rel. Hum. (%RH)	Note(s)
5G Verification Source 10 GHz	10	93.3	psPDn+	54.2	56.7	-4.41	54.5	57.0	-4.39	2025/03/24	20.7	58.8	-
			psPDtot+	54.5	57.0	-4.39							
			psPDmod+	54.8	57.2	-4.20							
	10	93.3	psPDn+	53.9	56.7	-4.94	54.3	57.0	-4.74	2025/03/25	20.4	47.9	-
			psPDtot+	54.3	57.0	-4.74							
			psPDmod+	54.7	57.2	-4.37							
	10	93.3	psPDn+	55.7	56.7	-1.76	56.0	57.0	-1.75	2025/03/26	20.6	47.6	-
			psPDtot+	56.0	57.0	-1.75							
			psPDmod+	56.3	57.2	-1.57							

- * Prad: radiated power (the forward power to the horn antenna minus ohmic and mismatch loss),
 psPD: peak spatial-average power density, psPDn+: surface-normal propagation-direction psPD,
 psPDtot+: total propagating psPD, psPDmod+: total psPD considering reactive near-field effects.

*1 The Prad is the same as the calibration certificate of verification sources used.

*2 The psPD Avg. Meas. values were calculated by averaging the psPDn+, psPDtot+, and psPDmod+ Meas. Values.

*3 The psPD Avg. Target values are defined in the calibration certificate of verification sources used.

*4 The deviation of psPD Avg. Meas. values from psPD Avg. Target values must be within +/-10 %.

3. Conducted Power Measurements

☒ <The Initial Test Configuration Procedures for Wi-Fi>

According to KDB 248227 D01,

the initial test configuration is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band.

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined by applying the following steps sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

3.1. Conducted Power Measurement Results


Bluetooth

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2024/9/13	24.2	66.7	Mikiko Kouga
2024/10/24	22.6	65.1	Mikiko Kouga

Mode	Ch.	Freq. (MHz)	Packet Type	Meas. Frame Averaged Power (dBm)	Meas. Burst Averaged Power (dBm) *1	Max. Poss. Power (dBm)	Within 2 dB of Max Poss. Power	SAR Tested	Note(s)
Classic	0	2402	DH5	8.20	9.35	10.00	Yes	Yes	Worst Ch
	39	2441	DH5	7.80	8.95	10.00	Yes	Yes	-
	78	2480	DH5	7.38	8.53	10.00	Yes	Yes	-
LE	0	2402	1.0 Mbps	8.64	9.34	10.00	Yes	Yes	Worst Ch
	19	2440	1.0 Mbps	8.25	8.95	10.00	Yes	Yes	-
	39	2480	1.0 Mbps	7.83	8.53	10.00	Yes	Yes	-

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

Duty Cycle Plot(s) for Bluetooth

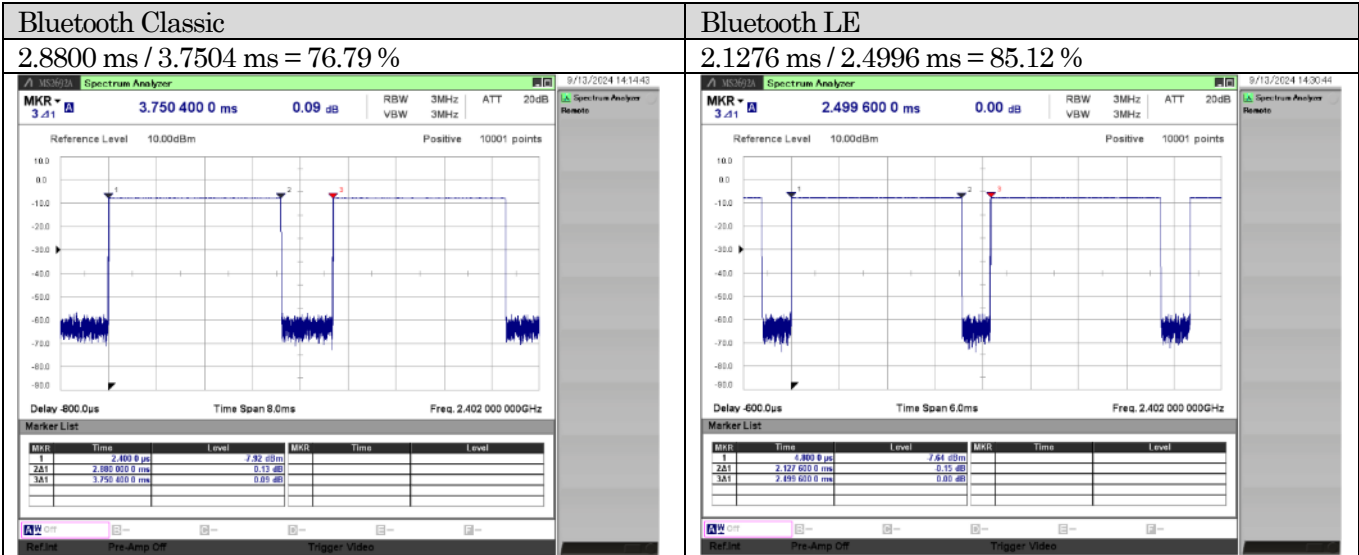

Wi-Fi 2.4 GHz

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2024/12/23	20.1	36.5	Mikiko Kouga
2024/12/25	20.0	34.2	Mikiko Kouga
2024/12/26	20.9	40.1	Mikiko Kouga

Mode	Ch.	Freq. (MHz)	Data Rate /MCS	Meas. Frame Averaged Power (dBm)		Meas. Burst Averaged Power (dBm) *1		Max. Poss. Power (dBm)		Within 2 dB of Max. Poss. Power	SAR Tested	Note(s)
				Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1			
802.11b	1	2412	1.0 Mbps	8.45	8.78	8.49	8.82	9.50	9.50	Yes	Yes	Chain0 Worst Ch
	6	2437	1.0 Mbps	8.00	8.78	8.04	8.82	9.50	9.50	Yes	Yes	-
	11	2462	1.0 Mbps	8.00	9.35	8.04	9.39	9.50	9.50	Yes	Yes	Chain1 Worst Ch
802.11g	1	2412	6.0 Mbps	8.20	8.60	8.24	8.64	9.50	9.50	Yes	-	-
	6	2437	6.0 Mbps	7.68	8.68	7.72	8.72	9.50	9.50	Yes	-	-
	11	2462	6.0 Mbps	7.70	9.33	7.74	9.36	9.50	9.50	Yes	-	-
802.11n (HT20)	1	2412	MCS-0	9.17	8.49	9.18	8.50	9.50	9.50	Yes	-	-
	6	2437	MCS-0	8.67	8.58	8.68	8.60	9.50	9.50	Yes	-	-
	11	2462	MCS-0	8.73	9.27	8.74	9.28	9.50	9.50	Yes	-	-
802.11ax (HE20)	1	2412	MCS-0	9.23	8.60	9.24	8.61	9.50	9.50	Yes	-	-
	6	2437	MCS-0	8.71	8.72	8.73	8.74	9.50	9.50	Yes	-	-
	11	2462	MCS-0	8.77	9.40	8.78	9.42	9.50	9.50	Yes	-	-

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 SAR is not required for 802.11g/n/ax channels when the highest reported SAR for DSSS (802.11b) is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

Wi-Fi 5 GHz (5.2 GHz: U-NII-1 and 5.3 GHz: U-NII-2A Bands)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2024/12/23	20.1	36.5	Mikiko Kouga
2024/12/26	20.9	40.1	Mikiko Kouga
2025/1/10	18.9	38.2	Mikiko Kouga

The Initial Test Configuration (ITC) : IEEE 802.11ax (HE160) (*2)(*3)

Mode	Freq. Band	Ch.	Freq. (MHz)	Data Rate /MCS	Meas. Frame Averaged Power (dBm)		Meas. Burst Averaged Power (dBm) *1		Max. Poss. Power (dBm)		Within 2 dB of Max. Poss. Power	SAR Tested	Note(s)
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1			
802.11a	U-NII-1	36	5180	6.0 Mbps	10.21	9.93	10.25	9.97	11.50	11.50	Yes	-	-
		40	5200	6.0 Mbps	10.18	9.94	10.22	9.98	11.50	11.50	Yes	-	-
		44	5220	6.0 Mbps	10.10	10.28	10.14	10.32	11.50	11.50	Yes	-	-
		48	5240	6.0 Mbps	10.41	10.85	10.45	10.89	11.50	11.50	Yes	-	-
	U-NII-2A	52	5260	6.0 Mbps	10.35	10.65	10.39	10.69	11.50	11.50	Yes	-	-
		56	5280	6.0 Mbps	10.31	10.37	10.35	10.41	11.50	11.50	Yes	-	-
		60	5300	6.0 Mbps	10.53	10.31	10.57	10.35	11.50	11.50	Yes	-	-
		64	5320	6.0 Mbps	10.47	10.28	10.51	10.32	11.50	11.50	Yes	-	-
802.11n (HT20)	U-NII-1	36	5180	MCS-0	11.17	9.92	11.18	9.93	11.50	11.50	Yes	-	-
		40	5200	MCS-0	11.01	9.78	11.02	9.79	11.50	11.50	Yes	-	-
		44	5220	MCS-0	10.95	9.73	10.96	9.74	11.50	11.50	Yes	-	-
		48	5240	MCS-0	11.03	10.22	11.04	10.23	11.50	11.50	Yes	-	-
	U-NII-2A	52	5260	MCS-0	11.08	10.48	11.09	10.49	11.50	11.50	Yes	-	-
		56	5280	MCS-0	11.01	10.09	11.02	10.10	11.50	11.50	Yes	-	-
		60	5300	MCS-0	11.35	10.01	11.36	10.02	11.50	11.50	Yes	-	-
		64	5320	MCS-0	11.18	10.38	11.19	10.39	11.50	11.50	Yes	-	-
802.11n (HT40)	U-NII-1	38	5190	MCS-0	11.07	10.68	11.08	10.69	11.50	11.50	Yes	-	-
		46	5230	MCS-0	11.01	10.64	11.02	10.65	11.50	11.50	Yes	-	-
	U-NII-2A	54	5270	MCS-0	11.07	10.98	11.08	10.99	11.50	11.50	Yes	-	-
		62	5310	MCS-0	11.23	10.60	11.24	10.61	11.50	11.50	Yes	-	-
802.11ac (VHT20)	U-NII-1	36	5180	MCS-0	10.97	10.27	10.98	10.28	11.50	11.50	Yes	-	-
		40	5200	MCS-0	10.97	9.96	10.98	9.97	11.50	11.50	Yes	-	-
		44	5220	MCS-0	10.85	9.98	10.86	9.99	11.50	11.50	Yes	-	-
		48	5240	MCS-0	10.92	10.47	10.93	10.48	11.50	11.50	Yes	-	-
	U-NII-2A	52	5260	MCS-0	10.97	10.65	10.98	10.66	11.50	11.50	Yes	-	-
		56	5280	MCS-0	10.75	10.44	10.76	10.45	11.50	11.50	Yes	-	-
		60	5300	MCS-0	11.27	10.17	11.28	10.18	11.50	11.50	Yes	-	-
		64	5320	MCS-0	11.10	10.14	11.11	10.15	11.50	11.50	Yes	-	-
802.11ac (VHT40)	U-NII-1	38	5190	MCS-0	10.96	10.72	10.97	10.73	11.50	11.50	Yes	-	-
		46	5230	MCS-0	10.85	10.56	10.86	10.57	11.50	11.50	Yes	-	-
	U-NII-2A	54	5270	MCS-0	11.09	11.08	11.10	11.09	11.50	11.50	Yes	-	-
		62	5310	MCS-0	11.25	10.72	11.26	10.73	11.50	11.50	Yes	-	-
802.11ac (VHT80)	U-NII-1	42	5210	MCS-0	11.26	10.53	11.27	10.54	11.50	11.50	Yes	-	-
	U-NII-2A	58	5290	MCS-0	10.71	10.78	10.72	10.79	11.50	11.50	Yes	-	-

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 When the same maximum output power is specified for U-NII-1 and U-NII-2A bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), SAR is not required for U-NII-1 band for that configuration.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11a/n/ac/ax-HE20/ax-HE40/ax-HE80) when the highest reported SAR for the initial test configuration (802.11 ax-HE160) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

(Continued)

Mode	Freq. Band	Ch.	Freq. (MHz)	Data Rate /MCS	Meas. Frame Averaged Power (dBm)		Meas. Burst Averaged Power (dBm) *1		Max. Poss. Power (dBm)		Within 2 dB of Max. Poss. Power	SAR Tested	Note(s)
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1			
802.11ax (HE20)	U-NII-1	36	5180	MCS-0	10.92	10.68	10.93	10.69	11.5	11.5	Yes	-	-
		40	5200	MCS-0	10.99	10.66	11.00	10.67	11.5	11.5	Yes	-	-
		44	5220	MCS-0	10.77	10.61	10.78	10.62	11.5	11.5	Yes	-	-
		48	5240	MCS-0	10.92	11.02	10.93	11.03	11.5	11.5	Yes	-	-
	U-NII-2A	52	5260	MCS-0	10.78	11.11	10.79	11.12	11.5	11.5	Yes	-	-
		56	5280	MCS-0	10.51	11.05	10.52	11.06	11.5	11.5	Yes	-	-
		60	5300	MCS-0	11.08	10.77	11.09	10.78	11.5	11.5	Yes	-	-
802.11ax (HE40)	U-NII-1	38	5190	MCS-0	10.62	10.58	10.63	10.59	11.5	11.5	Yes	-	-
		46	5230	MCS-0	10.23	10.43	10.24	10.44	11.5	11.5	Yes	-	-
	U-NII-2A	54	5270	MCS-0	10.37	10.96	10.38	10.97	11.5	11.5	Yes	-	-
		62	5310	MCS-0	10.73	10.67	10.74	10.68	11.5	11.5	Yes	-	-
802.11ax (HE80)	U-NII-1	42	5210	MCS-0	10.38	10.55	10.39	10.56	11.5	11.5	Yes	-	-
	U-NII-2A	58	5290	MCS-0	10.50	10.89	10.51	10.90	11.5	11.5	Yes	-	-
802.11ax (HE160)	U-NII-1	50	5250	MCS-0	10.45	10.91	10.46	10.92	11.5	11.5	Yes	Yes	ITC

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 When the same maximum output power is specified for U-NII-1 and U-NII-2A bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), SAR is not required for U-NII-1 band for that configuration.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11a/n/ac/ax-HE20/ax-HE40/ax-HE80) when the highest reported SAR for the initial test configuration (802.11 ax-HE160) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

Wi-Fi 5 GHz (5.6 GHz: U-NII-2C Band)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2024/12/23	20.1	36.5	Mikiko Kouga
2025/1/10	18.9	38.2	Mikiko Kouga

The Initial Test Configuration (ITC) : IEEE 802.11ax (HE160) (*3)

Mode	Freq. Band	Ch.	Freq. (MHz)	Data Rate /MCS	Meas. Frame Averaged Power (dBm)		Meas. Burst Averaged Power (dBm) *1		Max. Poss. Power (dBm)		Within 2 dB of Max. Poss. Power	SAR Tested	Note(s)
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1			
802.11a	U-NII-2C	100	5500	6.0 Mbps	10.83	11.14	10.87	11.18	11.50	11.50	Yes	-	-
		120	5600	6.0 Mbps	10.74	11.22	10.78	11.26	11.50	11.50	Yes	-	-
		140	5600	6.0 Mbps	10.99	11.30	11.03	11.34	11.50	11.50	Yes	-	-
802.11n (HT20)	U-NII-2C	100	5500	MCS-0	10.74	10.92	10.75	10.93	11.50	11.50	Yes	-	-
		120	5600	MCS-0	10.59	11.07	10.60	11.08	11.50	11.50	Yes	-	-
		140	5600	MCS-0	10.84	11.24	10.85	11.25	11.50	11.50	Yes	-	-
802.11ac (VHT20)	U-NII-2C	100	5500	MCS-0	10.74	10.87	10.75	10.88	11.50	11.50	Yes	-	-
		120	5600	MCS-0	10.69	11.22	10.70	11.23	11.50	11.50	Yes	-	-
		140	5600	MCS-0	10.78	11.24	10.79	11.25	11.50	11.50	Yes	-	-
802.11ax (HE20)	U-NII-2C	100	5500	MCS-0	10.77	10.95	10.78	10.96	11.50	11.50	Yes	-	-
		120	5600	MCS-0	10.66	11.20	10.67	11.21	11.50	11.50	Yes	-	-
		140	5600	MCS-0	10.86	11.36	10.87	11.37	11.50	11.50	Yes	-	-
802.11n (HT40)	U-NII-2C	102	5510	MCS-0	10.67	9.87	10.68	9.88	11.50	11.50	Yes	-	-
		118	5590	MCS-0	10.70	10.20	10.71	10.21	11.50	11.50	Yes	-	-
		134	5670	MCS-0	10.67	10.57	10.68	10.58	11.50	11.50	Yes	-	-
802.11ac (VHT40)	U-NII-2C	102	5510	MCS-0	10.83	9.88	10.84	9.89	11.50	11.50	Yes	-	-
		118	5590	MCS-0	10.73	10.17	10.74	10.18	11.50	11.50	Yes	-	-
		134	5670	MCS-0	10.88	10.54	10.89	10.55	11.50	11.50	Yes	-	-
802.11ax (HE40)	U-NII-2C	102	5510	MCS-0	10.62	9.73	10.63	9.74	11.50	11.50	Yes	-	-
		118	5590	MCS-0	10.68	9.89	10.69	9.90	11.50	11.50	Yes	-	-
		134	5670	MCS-0	10.71	10.50	10.72	10.51	11.50	11.50	Yes	-	-
802.11ac (VHT80)	U-NII-2C	106	5530	MCS-0	10.43	10.70	10.44	10.71	11.50	11.50	Yes	-	-
		122	5610	MCS-0	10.53	10.85	10.54	10.86	11.50	11.50	Yes	-	-
802.11ax (HE80)	U-NII-2C	106	5530	MCS-0	10.46	10.88	10.47	10.89	11.50	11.50	Yes	-	-
		122	5610	MCS-0	10.52	10.98	10.53	10.99	11.50	11.50	Yes	-	-
802.11ax (HE160)	U-NII-2C	114	5570	MCS-0	10.66	10.85	10.67	10.86	11.50	11.50	Yes	Yes	ITC

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11a/n/ac/ax-HE20/ax-HE40/ax-HE80) when the highest reported SAR for the initial test configuration (802.11 ax-HE160) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

Wi-Fi 5 GHz (5.8 GHz: U-NII-3 Band)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2024/12/23	20.1	36.5	Mikiko Kouga
2025/1/10	18.9	38.2	Mikiko Kouga

The Initial Test Configuration (ITC) : IEEE 802.11ac (VHT80) (*3)

Mode	Freq. Band	Ch.	Freq. (MHz)	Data Rate /MCS	Meas. Frame Averaged Power (dBm)		Meas. Burst Averaged Power (dBm) *1		Max. Poss. Power (dBm)		Within 2 dB of Max. Poss. Power	SAR Tested	Note(s)
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1			
802.11a	U-NII-3	149	5745	6.0 Mbps	10.42	10.63	10.46	10.67	11.50	11.50	Yes	-	-
		157	5785	6.0 Mbps	10.73	11.37	10.77	11.41	11.50	11.50	Yes	-	-
		165	5825	6.0 Mbps	10.67	10.98	10.70	11.02	11.50	11.50	Yes	-	-
802.11n (HT20)	U-NII-3	149	5745	MCS-0	10.42	10.47	10.43	10.48	11.50	11.50	Yes	-	-
		157	5785	MCS-0	10.68	11.03	10.70	11.04	11.50	11.50	Yes	-	-
		165	5825	MCS-0	10.52	10.52	10.53	10.53	11.50	11.50	Yes	-	-
802.11ac (VHT20)	U-NII-3	149	5745	MCS-0	10.45	9.89	10.46	9.90	11.50	11.50	Yes	-	-
		157	5785	MCS-0	10.66	10.78	10.68	10.79	11.50	11.50	Yes	-	-
		165	5825	MCS-0	10.51	10.32	10.53	10.33	11.50	11.50	Yes	-	-
802.11ax (HE20)	U-NII-3	149	5745	MCS-0	10.48	10.40	10.50	10.41	11.50	11.50	Yes	-	-
		157	5785	MCS-0	10.73	10.96	10.75	10.97	11.50	11.50	Yes	-	-
		165	5825	MCS-0	10.61	10.62	10.62	10.63	11.50	11.50	Yes	-	-
802.11n (HT40)	U-NII-3	151	5755	MCS-0	10.55	10.21	10.57	10.22	11.50	11.50	Yes	-	-
		159	5795	MCS-0	10.77	10.77	10.78	10.78	11.50	11.50	Yes	-	-
802.11ac (VHT40)	U-NII-3	151	5755	MCS-0	10.49	11.08	10.51	11.09	11.50	11.50	Yes	-	-
		159	5795	MCS-0	10.71	11.27	10.72	11.28	11.50	11.50	Yes	-	-
802.11ax (HE40)	U-NII-3	151	5755	MCS-0	10.46	10.38	10.48	10.39	11.50	11.50	Yes	-	-
		159	5795	MCS-0	10.65	10.79	10.66	10.80	11.50	11.50	Yes	-	-
802.11ac (VHT80)	U-NII-3	155	5775	MCS-0	10.62	11.31	10.64	11.32	11.50	11.50	Yes	Yes	ITC
802.11ax (HE80)	U-NII-3	155	5775	MCS-0	10.75	10.94	10.76	10.95	11.50	11.50	Yes	-	-

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11 a/n/ac-VHT20/ac-VHT40/ax) when the highest reported SAR for the initial test configuration (802.11 ac-VHT80) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

Wi-Fi 6 GHz

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2024/12/25	20.0	34.2	Mikiko Kouga
2025/1/8	21.2	35.6	Mikiko Kouga
2025/1/10	18.9	38.2	Mikiko Kouga

The Initial Test Configuration (ITC) : IEEE 802.11ax (HE160) (*3)

Mode	Freq. Band	Ch.	Freq. (MHz)	Data Rate /MCS	Meas. Frame Averaged Power (dBm)		Meas. Burst Averaged Power (dBm) *1		Max. Poss. Power (dBm)		Within 2 dB of Max. Poss. Power	SAR Tested	Note(s)
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1			
802.11a	U-NII-5	1	5955	6.0 Mbps	4.48	5.03	4.52	5.07	5.50	5.50	Yes	-	-
		45	6175	6.0 Mbps	4.93	4.63	4.97	4.67	5.50	5.50	Yes	-	-
		93	6415	6.0 Mbps	4.21	4.27	4.25	4.31	5.50	5.50	Yes	-	-
	U-NII-6	97	6435	6.0 Mbps	4.64	4.68	4.68	4.72	5.50	5.50	Yes	-	-
		105	6475	6.0 Mbps	4.57	4.55	4.61	4.59	5.50	5.50	Yes	-	-
		113	6515	6.0 Mbps	5.39	4.40	5.43	4.44	5.50	5.50	Yes	-	-
	U-NII-7	117	6535	6.0 Mbps	4.49	5.36	4.53	5.40	5.50	5.50	Yes	-	-
		149	6695	6.0 Mbps	3.93	4.38	3.97	4.42	5.50	5.50	Yes	-	-
		181	6855	6.0 Mbps	3.62	3.80	3.66	3.84	5.50	5.50	Yes	-	-
		185	6875	6.0 Mbps	4.13	4.61	4.17	4.65	5.50	5.50	Yes	-	-
	U-NII-8	189	6895	6.0 Mbps	4.84	4.99	4.88	5.03	5.50	5.50	Yes	-	-
		209	6995	6.0 Mbps	4.39	4.64	4.43	4.68	5.50	5.50	Yes	-	-
		229	7095	6.0 Mbps	3.96	4.27	4.00	4.31	5.50	5.50	Yes	-	-
802.11ax (HE20)	U-NII-5	1	5955	MCS-0	4.61	5.00	4.62	5.01	5.50	5.50	Yes	-	-
		45	6175	MCS-0	4.88	4.57	4.89	4.58	5.50	5.50	Yes	-	-
		93	6415	MCS-0	4.26	4.33	4.27	4.34	5.50	5.50	Yes	-	-
	U-NII-6	97	6435	MCS-0	4.44	4.65	4.45	4.66	5.50	5.50	Yes	-	-
		105	6475	MCS-0	4.29	4.41	4.30	4.42	5.50	5.50	Yes	-	-
		113	6515	MCS-0	5.37	4.28	5.38	4.29	5.50	5.50	Yes	-	-
	U-NII-7	117	6535	MCS-0	4.63	5.38	4.64	5.39	5.50	5.50	Yes	-	-
		149	6695	MCS-0	4.04	4.63	4.05	4.64	5.50	5.50	Yes	-	-
		181	6855	MCS-0	3.58	4.15	3.59	4.16	5.50	5.50	Yes	-	-
		185	6875	MCS-0	4.23	4.97	4.24	4.98	5.50	5.50	Yes	-	-
	U-NII-8	189	6895	MCS-0	4.80	4.93	4.81	4.94	5.50	5.50	Yes	-	-
		209	6995	MCS-0	4.33	4.62	4.34	4.63	5.50	5.50	Yes	-	-
		229	7095	MCS-0	3.96	4.31	3.97	4.32	5.50	5.50	Yes	-	-
802.11ax (HE40)	U-NII-5	3	5965	MCS-0	7.51	7.79	7.52	7.80	8.50	8.50	Yes	-	-
		43	6165	MCS-0	7.78	7.59	7.79	7.60	8.50	8.50	Yes	-	-
		91	6405	MCS-0	7.19	7.44	7.20	7.45	8.50	8.50	Yes	-	-
	U-NII-6	99	6445	MCS-0	7.41	7.71	7.42	7.72	8.50	8.50	Yes	-	-
		107	6485	MCS-0	7.81	7.54	7.82	7.55	8.50	8.50	Yes	-	-
		115	6525	MCS-0	8.22	7.40	8.23	7.41	8.50	8.50	Yes	-	-
	U-NII-7	123	6565	MCS-0	8.13	8.40	8.14	8.41	8.50	8.50	Yes	-	-
		147	6685	MCS-0	7.86	7.75	7.87	7.76	8.50	8.50	Yes	-	-
		179	6845	MCS-0	7.57	6.97	7.58	6.98	8.50	8.50	Yes	-	-
		187	6885	MCS-0	8.18	7.87	8.19	7.88	8.50	8.50	Yes	-	-
	U-NII-8	195	6925	MCS-0	7.50	7.80	7.51	7.81	8.50	8.50	Yes	-	-
		211	7005	MCS-0	7.24	7.43	7.25	7.44	8.50	8.50	Yes	-	-
		227	7085	MCS-0	7.04	7.30	7.05	7.31	8.50	8.50	Yes	-	-

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11a/ax-HE20/ax-HE40/ax-HE80) when the highest reported SAR for the initial test configuration (802.11 ax-HE160) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

(Continued)

Mode	Freq. Band	Ch.	Freq. (MHz)	Data Rate / MCS	Meas. Frame Averaged Power (dBm)		Meas. Burst Averaged Power (dBm)		Max. Poss. Power (dBm)		Within 2 dB of Max. Poss. Power	SAR Tested	Note(s)
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1			
802.11ax (HE80)	U-NII-5	7	5985	MCS-0	10.82	10.72	10.83	10.73	11.50	11.50	Yes	-	-
		39	6145	MCS-0	10.31	10.23	10.32	10.24	11.50	11.50	Yes	-	-
		87	6385	MCS-0	9.84	10.41	9.85	10.42	11.50	11.50	Yes	-	-
	U-NII-6	103	6465	MCS-0	10.43	10.41	10.44	10.42	11.50	11.50	Yes	-	-
		119	6545	MCS-0	10.63	9.71	10.64	9.72	11.50	11.50	Yes	-	-
	U-NII-7	135	6625	MCS-0	10.52	11.21	10.53	11.22	11.50	11.50	Yes	-	-
		151	6705	MCS-0	10.50	10.79	10.51	10.80	11.50	11.50	Yes	-	-
		167	6785	MCS-0	10.58	10.32	10.59	10.33	11.50	11.50	Yes	-	-
		183	6865	MCS-0	11.11	11.30	11.12	11.31	11.50	11.50	Yes	-	-
	U-NII-8	199	6945	MCS-0	11.03	10.98	11.04	10.99	11.50	11.50	Yes	-	-
		215	7025	MCS-0	10.80	10.66	10.81	10.67	11.50	11.50	Yes	-	-
802.11ax (HE160)	U-NII-5	15	6025	MCS-0	10.67	11.07	10.68	11.08	11.50	11.50	Yes	Yes	Chain 1 ITC
		47	6185	MCS-0	10.48	10.47	10.49	10.48	11.50	11.50	Yes	Yes	-
		79	6345	MCS-0	9.73	9.99	9.74	10.00	11.50	11.50	Yes	-	-
	U-NII-6	111	6505	MCS-0	10.70	11.01	10.71	11.02	11.50	11.50	Yes	Yes	-
	U-NII-7	143	6665	MCS-0	10.63	10.68	10.64	10.69	11.50	11.50	Yes	Yes	-
		175	6825	MCS-0	10.51	10.18	10.52	10.19	11.50	11.50	Yes	-	-
	U-NII-8	207	6985	MCS-0	10.77	10.92	10.78	10.93	11.50	11.50	Yes	Yes	Chain 0 ITC

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11a/ax-HE20/ax-HE40/ax-HE80) when the highest reported SAR for the initial test configuration (802.11 ax-HE160) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

4. SAR / APD / IPD Measurements

☒ <SAR Correction/Scaling>

According to KDB 447498 D01, KDB 248227 D01, and/or KDB 865664 D01, the maximum SAR values are determined by taking account of the following correction or scaling factors.

The maximum 1-g SAR and/or 10-g SAR values (reported SAR) are calculated by applying the Δ SAR positive correction for deviations of the tissue-equivalent liquid and the power scaling for the maximum duty factor and maximum possible power levels (maximum tune-up tolerance limit) to each measured 1-g SAR and/or 10-g SAR value:

$$\begin{aligned} \text{Reported SAR (W/kg)} &= \text{Measured SAR (W/kg)} * \Delta\text{SAR positive correction factor} \\ &\quad * \text{Duty cycle scaling factor} * \text{Tune-up scaling factor} \end{aligned}$$

where;

$$\Delta\text{SAR positive correction factor} = (100 - \Delta\text{SAR}^{*1}) / 100$$

$$\text{Duty cycle scaling factor} = \text{Max. possible duty cycle} / \text{Measured duty cycle used for the SAR measurement}$$

$$\text{Tune-up scaling factor} = \text{Max. possible power (mW)} / \text{Measured power used for the SAR measurement (mW)}$$

$$*1 \quad \Delta\text{SAR} (\%) = c_e * \Delta\epsilon_r + c_o * \Delta\sigma$$

<For 1-g SAR>

$$c_e = -7.854 * 10^{-4} f^3 + 9.402 * 10^{-3} f^2 - 2.742 * 10^{-2} f - 0.2026$$

$$c_o = 9.804 * 10^{-3} f^3 - 8.661 * 10^{-2} f^2 + 2.981 * 10^{-2} f + 0.7829$$

<For 10-g SAR>

$$c_e = 3.456 * 10^{-3} f^3 - 3.531 * 10^{-2} f^2 + 7.675 * 10^{-2} f - 0.1860$$

$$c_o = 4.479 * 10^{-3} f^3 - 1.586 * 10^{-2} f^2 - 0.1972 f + 0.7717$$

where;

c_e coefficient representing the sensitivity of SAR to permittivity

$\Delta\epsilon_r$ percent change in permittivity

c_o coefficient representing the sensitivity of SAR to conductivity

$\Delta\sigma$ percent change in conductivity

f frequency in GHz

A negative Δ SAR would translate to a lower measured SAR value than what would be measured if using dielectric properties equal to the target values.

A positive Δ SAR would translate to a higher measured SAR value than what would be measured if using dielectric properties equal to the target values.

SAR correction shall not be made when the Δ SAR has a positive sign to provide a conservative SAR value.

The SAR is only corrected when Δ SAR has a negative sign.

☒ <SAR Test Reduction for Wi-Fi>

SAR test reduction for Wi-Fi is applied according to KDB 248227 D01.

For 2.4 GHz 802.11g/n OFDM configurations

SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively).

For U-NII-1 (W52) and U-NII-2A (W53) Bands

When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

☒ <APD evaluation based on SAR>

According to IEC PAS 63446,
the APD values are derived from SAR values by DASY 8 system as follows.

The 4-cm² APD values are calculated by applying the conversion factors (SAR to APD) of 20 kg/m² to each measured 8-g SAR value:

$$\begin{aligned} \text{Max. 4-cm}^2 \text{ APD (W/m}^2\text{)} &= \text{Measured 8-g SAR (W/kg)} * \text{conversion factor (SAR to APD)} \\ &= \text{Measured 8-g SAR (W/kg)} * 20 \text{ kg/m}^2 \end{aligned}$$

☒ <RF Exposure Evaluation Policy for sources with frequency between 6000 MHz and 8500 MHz>

For Wi-Fi 6 GHz, SAR, APD, and IPD are measured according to KDB 388624 D02, Appendix OVER6G as follows.

- 1 For frequencies up to 8500 MHz provide spatial peak SAR evaluation based on IEC/IEEE 62209-1528:2020, along with applicable product-specific procedures among KDB Pubs. 648474, 616217, 941225. SAR test data shall account for device tune-up tolerance (that is referred to as "Reported SAR" in KDB 447498).
- 2 This policy considers a device compliant for Equipment Authorization purposes, so long as the SAR evaluation of step 1. is within the same SAR limits that have been established for frequencies below 6000 MHz (e.g., 1.6 W/kg for 1-g average SAR). In this case, the SAR evaluations are taken as a conservative compliance demonstration to the MPE power density limits of 47 CFR 1.1310(d)(3).
- 3 Documentation is required to support evaluation with MPE limits providing power density data in accordance with the following:
 - 3.1 For the test configurations of step 1 having the highest SAR, evaluate Incident Power Density (IPD), using a suitable near-field probe and a total-field/power-density reconstruction method (e.g., as per methods in [Pfeiffer, 2019]).
 - 3.2 Report estimated IPD measurement uncertainty (e.g., per methods of IEC/IEEE 63195-1:2022).
(Where PD test data expanded measurement uncertainty > 30% (k = 2), methods of e.g., IEC 62479:2010 apply for reporting purposes.)
 - 3.3 Power density test data shall account for device tune-up tolerance.
 - 3.4 If supported by the test system, also report estimated Absorbed (epithelial) Power Density (APD) (e.g., as per method in [Samaras, 2021]).
- 4 The process of steps 1 to 4 shall be repeated for at least five channels, at the channel center frequency, selected to cover uniformly the largest frequency ranges used in the device, between 5925 MHz and 8500 MHz, and consistent with KDB Publication 248227 test configuration provisions.
- 5 For the purpose of SAR test exemption, analyses of simultaneous transmission combinations of RF sources with frequencies from 4 MHz and 8500 MHz (where the lowest frequency is per KDB Publication 447498-D01 SAR evaluation requirements), may be performed according to the SPLSR approach (id.). Accordingly, no further compliance evaluation is needed for all antenna pairs for which the SPLSR exemption is applicable.

4.1. SAR Measurement Results (other than Wi-Fi 6 GHz)

<Body-Worn SAR>

Bluetooth

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/2/18	20.6	38.1	Sho Fukushima

Mode	Ch.	Freq. (MHz)	Pos.	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
Step 1: Worst Position Check												
Classic	0	2402	Front-Right	0	10.00	9.35	83.33	76.79	0.002	0.003	19.9	-
			Back		10.00	9.35	83.33	76.79	0.002	0.003	19.9	-
			Top-Left		10.00	9.35	83.33	76.79	0.047	0.059	19.9	-
			Top-Right		10.00	9.35	83.33	76.79	0.005	0.006	19.9	-
Step 2: Worst Channel Check (for Step 1)												
Classic	39	2441	Top-Left	0	10.00	8.95	83.33	76.79	0.023	0.032	19.8	-
	78	2480			10.00	8.53	83.33	76.79	0.013	0.020	19.8	-
Step 3: Worst Mode Check (for Step 1)												
LE	0	2402	Top-Left	0	10.00	9.34	100.00	85.12	0.048	0.066	19.8	1
	19	2440			10.00	8.95	100.00	85.12	0.027	0.040	19.7	-
	39	2480			10.00	8.53	100.00	85.12	0.017	0.028	19.7	-

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

Wi-Fi 2.4 GHz

(Chain 0)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/2/18	23.1	41.6	Yosuke Kamiko

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
802.11b (1Mbps)	1	2412	Front-Right	0	9.50	8.49	100.00	99.07	0.003	0.004	19.6	-
			Back		9.50	8.49	100.00	99.07	0.002	0.003	19.7	-
			Top-Left		9.50	8.49	100.00	99.07	0.050	0.064	19.9	-
			Top-Right		9.50	8.49	100.00	99.07	0.005	0.006	19.7	-
Step 2: Worst Channel Check (for Step 1)												
802.11b (1Mbps)	6	2437	Top-Left	0	9.50	8.04	100.00	99.07	0.046	0.065	19.9	2
	11	2462	Top-Left		9.50	8.04	100.00	99.07	0.040	0.057	20.0	-

(Chain 1)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/2/18	22.5	41.5	Yosuke Kamiko

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
802.11b (1Mbps)	11	2462	Front-Right	0	9.50	9.39	100.00	99.07	0.008	0.008	20.3	-
			Back		9.50	9.39	100.00	99.07	0.003	0.003	20.3	-
			Top-Left		9.50	9.39	100.00	99.07	0.013	0.013	20.4	-
			Top-Right		9.50	9.39	100.00	99.07	0.126	0.130	20.3	-
Step 2: Worst Channel Check (for Step 1)												
802.11b (1Mbps)	1	2412	Top-Right	0	9.50	8.82	100.00	99.07	0.151	0.178	20.2	-
	6	2437	Top-Right		9.50	8.82	100.00	99.07	0.191	0.225	20.3	3

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

Wi-Fi 5 GHz (5.3 GHz: U-NII-2A Band)

(Chain 0)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/3/4	20.9	45.5	Yu Inoue

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
802.11ax (HE160)	50	5250	Front-Right	0	11.50	10.46	100.00	99.68	0.013	0.017	19.7	-
			Back		11.50	10.46	100.00	99.68	0.004	0.005	19.6	-
			Top-Left		11.50	10.46	100.00	99.68	0.037	0.047	19.8	4
			Top-Right		11.50	10.46	100.00	99.68	0.030	0.038	19.5	-

(Chain 1)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/3/4	21.0	43.5	Yu Inoue

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
802.11ax (HE160)	50	5250	Front-Right	0	11.50	10.92	100.00	99.68	0.003	0.003	19.6	-
			Back		11.50	10.92	100.00	99.68	0.026	0.030	19.7	-
			Top-Left		11.50	10.92	100.00	99.68	0.005	0.006	19.8	-
			Top-Right		11.50	10.92	100.00	99.68	0.028	0.032	19.7	5

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

Wi-Fi 5 GHz (5.6 GHz: U-NII-2C Band)

(Chain 0)

Date of measurement	Ambient temperature (deg. C)	Relative humidity (%RH)	Measured by
2025/3/5	22.9	46.0	Yu Inoue

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
802.11ax (HE160)	114	5570	Front-Right	0	11.50	10.67	100.00	99.68	0.010	0.012	20.1	-
			Back		11.50	10.67	100.00	99.68	0.007	0.009	20.1	-
			Top-Left		11.50	10.67	100.00	99.68	0.057	0.069	20.1	6
			Top-Right		11.50	10.67	100.00	99.68	0.002	0.002	20.1	-

(Chain 1)

Date of measurement	Ambient temperature (deg. C)	Relative humidity (%RH)	Measured by
2025/3/5	22.6	47.4	Yu Inoue

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
802.11ax (HE160)	114	5570	Front-Right	0	11.50	10.86	100.00	99.68	0.002	0.002	20.2	-
			Back		11.50	10.86	100.00	99.68	0.098	0.114	20.2	7
			Top-Left		11.50	10.86	100.00	99.68	0.009	0.010	20.2	-
			Top-Right		11.50	10.86	100.00	99.68	0.088	0.102	20.0	-

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where;

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

Wi-Fi 5 GHz (5.8 GHz: U-NII-3 Band)

(Chain 0)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/3/5	21.9	42.7	Yosuke Kamiko

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
802.11ac (VHT80)	155	5775	Front-Right	0	11.50	10.64	100.00	99.68	0.010	0.012	19.6	-
			Back		11.50	10.64	100.00	99.68	0.007	0.009	19.6	-
			Top-Left		11.50	10.64	100.00	99.68	0.046	0.056	19.8	8
			Top-Right		11.50	10.64	100.00	99.68	0.009	0.011	19.6	-

(Chain 1)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/3/21	22.2	39.9	Yosuke Kamiko

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg)	Liquid Temp. (deg. C)	Plot No.
802.11ac (VHT80)	155	5775	Front-Right	0	11.50	11.32	100.00	99.68	0.008	0.008	19.9	-
			Back		11.50	11.32	100.00	99.68	0.023	0.024	19.9	-
			Top-Left		11.50	11.32	100.00	99.68	0.013	0.014	19.8	-
			Top-Right		11.50	11.32	100.00	99.68	0.123	0.129	19.9	9

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where;

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

4.2. SAR / APD / IPD Measurement Results (Wi-Fi 6 GHz)

<Body-Worn SAR / APD>

Wi-Fi 6 GHz

(Chain 0)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/2/19	23.0	40.0	Yosuke Kamiko
2025/2/20	21.5	38.3	Yosuke Kamiko Yu Inoue
2025/2/25	22.2	38.8	Sho Fukushima
2025/3/25	19.7	58.3	Yu Inoue

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg) *1	Meas. 4-cm ² APD (W/m ²)	Reported 4-cm ² APD (W/m ²) *2	Liquid Temp. (deg. C)	Plot No.
802.11ax (HE160)	15	6025	Front-Right	0	11.50	10.68	100.00	99.68	0.005	0.006	N/D	N/D	20.2	-
			Back		11.50	10.68	100.00	99.68	0.009	0.011	N/D	N/D	20.0	-
			Top-Left		11.50	10.68	100.00	99.68	0.040	0.048	0.286	0.347	19.8	10
			Top-Right		11.50	10.68	100.00	99.68	0.006	0.007	N/D	N/D	19.7	-
	47	6185	Front-Right	0	11.50	10.49	100.00	99.68	0.008	0.010	0.056	0.071	20.5	-
			Back		11.50	10.49	100.00	99.68	0.009	0.011	0.082	0.104	20.5	-
			Top-Left		11.50	10.49	100.00	99.68	0.035	0.044	0.229	0.290	20.6	-
			Top-Right		11.50	10.49	100.00	99.68	0.005	0.006	0.044	0.056	20.6	-
	111	6505	Front-Right	0	11.50	10.71	100.00	99.68	0.012	0.014	0.083	0.100	19.7	-
			Back		11.50	10.71	100.00	99.68	0.015	0.018	0.112	0.135	19.7	-
			Top-Left		11.50	10.71	100.00	99.68	0.050	0.060	0.360	0.433	19.9	-
			Top-Right		11.50	10.71	100.00	99.68	0.013	0.016	0.124	0.149	19.8	-
	143	6665	Front-Right	0	11.50	10.64	100.00	99.68	0.013	0.016	0.074	0.090	19.7	-
			Back		11.50	10.64	100.00	99.68	0.015	0.018	0.138	0.169	19.6	-
			Top-Left		11.50	10.64	100.00	99.68	0.060	0.073	0.468	0.572	19.5	-
			Top-Right		11.50	10.64	100.00	99.68	0.016	0.020	0.116	0.142	19.8	-
	207	6985	Front-Right	0	11.50	10.78	100.00	99.68	0.016	0.019	0.137	0.162	19.7	-
			Back		11.50	10.78	100.00	99.68	0.015	0.018	0.124	0.147	19.8	-
			Top-Left		11.50	10.78	100.00	99.68	0.091	0.108	0.708	0.838	19.7	-
			Top-Right		11.50	10.78	100.00	99.68	0.024	0.028	0.171	0.202	19.7	-

* N/D: Not Detected.

* Since the channel 15 (6025 MHz) spans across 6 GHz, compliance to both the SAR and IPD limits was confirmed. The SAR results for the remaining channels and the APD results for all channels are only used as a reference for determining the IPD test configurations according to KDB 388624 D02.

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

Reported APD (W/m²) = Measured APD (W/m²) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

(Chain 1)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/2/19	20.8	37.0	Sho Fukushima Yu Inoue
2025/2/20	20.3	37.0	Sho Fukushima Yu Inoue
2025/2/25	23.8	41.0	Yosuke Kamiko

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Meas. 1-g SAR (W/kg)	Reported 1-g SAR (W/kg) *1	Meas. 4-cm ² APD (W/m ²)	Reported 4-cm ² APD (W/m ²) *2	Liquid Temp. (deg. C)	Plot No.
802.11ax (HE160)	15	6025	Front-Right	0	11.50	11.08	100.00	99.68	0.007	0.008	N/D	N/D	19.8	-
			Back		11.50	11.08	100.00	99.68	0.064	0.071	0.427	0.472	19.8	-
			Top-Left		11.50	11.08	100.00	99.68	0.002	0.002	N/D	N/D	19.7	-
			Top-Right		11.50	11.08	100.00	99.68	0.070	0.077	0.370	0.409	19.7	11
	47	6185	Front-Right	0	11.50	10.48	100.00	99.68	0.004	0.005	0.035	0.044	20.7	-
			Back		11.50	10.48	100.00	99.68	0.068	0.086	0.481	0.610	20.7	-
			Top-Left		11.50	10.48	100.00	99.68	0.009	0.011	0.087	0.110	20.7	-
			Top-Right		11.50	10.48	100.00	99.68	0.091	0.115	0.468	0.594	20.3	-
	111	6505	Front-Right	0	11.50	11.02	100.00	99.68	0.009	0.010	N/D	N/D	20.2	-
			Back		11.50	11.02	100.00	99.68	0.069	0.077	0.498	0.558	20.1	-
			Top-Left		11.50	11.02	100.00	99.68	0.017	0.019	0.143	0.160	20.1	-
			Top-Right		11.50	11.02	100.00	99.68	0.024	0.027	0.130	0.146	20.5	-
	143	6665	Front-Right	0	11.50	10.69	100.00	99.68	0.005	0.006	N/D	N/D	20.1	-
			Back		11.50	10.69	100.00	99.68	0.083	0.100	0.536	0.648	20.1	-
			Top-Left		11.50	10.69	100.00	99.68	0.012	0.015	0.099	0.120	20.0	-
			Top-Right		11.50	10.69	100.00	99.68	0.050	0.060	0.293	0.354	19.9	-
	207	6985	Front-Right	0	11.50	10.93	100.00	99.68	0.002	0.002	N/D	N/D	19.7	-
			Back		11.50	10.93	100.00	99.68	0.042	0.048	0.324	0.371	19.8	-
			Top-Left		11.50	10.93	100.00	99.68	0.015	0.017	N/D	N/D	19.7	-
			Top-Right		11.50	10.93	100.00	99.68	0.070	0.080	0.437	0.500	19.9	-

* N/D: Not Detected.

* Since the channel 15 (6025 MHz) spans across 6 GHz, compliance to both the SAR and IPD limits was confirmed. The SAR results for the remaining channels and the APD results for all channels are only used as a reference for determining the IPD test configurations according to KDB 388624 D02.

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

Reported APD (W/m²) = Measured APD (W/m²) * Duty cycle scaling factor * Tune-up scaling factor

where;

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

<2-mm IPD >

Wi-Fi 6 GHz

(Chain 0)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/3/24	20.7	60.0	Yosuke Kamiko
2025/3/25	21.7	53.0	Yosuke Kamiko

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Amt. of MU > 30 % (%)	Meas. 4-cm ² psPDn+ (W/m ²)	Reported 4-cm ² psPDn+ (W/m ²)	Meas. 4-cm ² psPDtot+ (W/m ²)	Reported 4-cm ² psPDtot+ (W/m ²)	Plot No.
802.11ax (HE160)	15	6025	Top-Left	2	11.50	10.68	100.00	99.68	12.3	0.528	0.718	0.942	1.282	-
	47	6185			11.50	10.49	100.00	99.68	12.3	0.418	0.594	0.749	1.065	-
	111	6505			11.50	10.71	100.00	99.68	12.3	0.608	0.822	1.000	1.351	-
	143	6665			11.50	10.64	100.00	99.68	12.3	0.568	0.780	0.827	1.136	-
	207	6985			11.50	10.78	100.00	99.68	12.3	0.554	0.737	1.100	1.463	12

(Chain 1)

Date of measurement	Ambient temperature (deg.C)	Relative humidity (%RH)	Measured by
2025/3/25	23.1	42.7	Yosuke Kamiko
2025/3/26	21.5	54.4	Yosuke Kamiko

Mode	Ch.	Freq. (MHz)	Position	Dis. (mm)	Max. Poss. Power (dBm)	Meas. Power (dBm)	Max. Duty Cycle (%)	Meas. Duty Cycle (%)	Amt. of MU > 30 % (%)	Meas. 4-cm ² psPDn+ (W/m ²)	Reported 4-cm ² psPDn+ (W/m ²)	Meas. 4-cm ² psPDtot+ (W/m ²)	Reported 4-cm ² psPDtot+ (W/m ²)	Plot No.
802.11ax (HE160)	15	6025	Top-Right	2	11.50	11.08	100.00	99.68	12.3	0.402	0.499	0.626	0.777	-
	47	6185			11.50	10.48	100.00	99.68	12.3	0.368	0.524	0.722	1.029	13
	111	6505			11.50	11.02	100.00	99.68	12.3	0.129	0.162	0.182	0.229	-
	143	6665			11.50	10.69	100.00	99.68	12.3	0.070	0.095	0.159	0.216	-
	207	6985			11.50	10.93	100.00	99.68	12.3	0.225	0.289	0.554	0.712	-

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported psPD (W/m²) = Measured psPD (W/m²) * Duty cycle scaling factor * Tune-up scaling factor * MU scaling factor

where;

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

MU (measurement uncertainty) scaling factor = ((Amount of MU exceeds 30 %) / 100 %) + 1 = ((expanded uncertainty (%)) - 30 %) / 100 % + 1

5. Simultaneous Transmission SAR evaluation

☒ <SAR Summation Analysis>

Simultaneous transmission SAR evaluation is determined according to KDB 447498 D01, Evaluation by summation of Reported SAR values, as the reference method.

- 1) If Reported SAR summation $> 1.6\text{W/kg}$, SAR test exclusion is determined by the SPLSR.
- 2) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{minimum separation distance})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$ where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR location in the zoom scan.
- 3) If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position	Highest Reported 1g-SAR (W/kg)							Σ 1-g SAR (W/kg)				
	(1) Bluetooth Chain 0 (Measured)	(2) Wi-Fi 2.4 GHz Chain 0 (Measured)	(3) Wi-Fi 2.4 GHz Chain 1 (Measured)	(4) Wi-Fi 5 GHz Chain 0 (Measured)	(5) Wi-Fi 5 GHz Chain 1 (Measured)	(6) Wi-Fi 6 GHz Chain 0 (Measured) $\leq 6\text{ GHz}$	(7) Wi-Fi 6 GHz Chain 1 (Measured) $\leq 6\text{ GHz}$	(2) + (3)	(4) + (5)	(6) + (7)	(1) + (4) + (5)	(1) + (6) + (7)
Front-Right	0.003	0.004	0.008	0.017	0.008	0.006	0.008	0.012	0.025	0.014	0.028	0.017
Back	0.003	0.003	0.003	0.009	0.114	0.011	0.071	0.006	0.123	0.082	0.126	0.085
Top-Left	0.066	0.065	0.013	0.069	0.014	0.048	0.002	0.078	0.083	0.050	0.149	0.116
Top-Right	0.006	0.006	0.225	0.038	0.129	0.007	0.077	0.231	0.167	0.084	0.173	0.090

☒ <TER Analysis>

According to TCB Workshop (Oct. 2018),

the total exposure ratio (TER) is calculated by taking ratio of reported SAR divided by SAR limit and adding it to measured power density divided by power density limit as below. Numerical sum of the two ratios should be 1 or less.

$$TER = \sum_{k=1}^{N_S} \left(\frac{SAR_k}{SAR_{lim}} \right) + \sum_{k=1}^{N_{PD}} \left(\frac{IPD_k}{IPD_{lim}} \right) \leq 1$$

where N_S and N_{PD} are sources requiring SAR or IPD, respectively, SAR_k and IPD_k are measured values for the source k , and SAR_{lim} and IPD_{lim} are the corresponding applicable compliance limits.

	Highest Reported			TER
	1-g SAR (W/kg)	4cm ² IPD (W/m ²)		
	(1) Bluetooth Chain 0 (Measured)	(6) Wi-Fi 6 GHz Chain 0 (Measured) (> 6 GHz)	(7) Wi-Fi 6 GHz Chain 1 (Measured) (> 6 GHz)	(1) + (6) + (7)
Limits	1.6	10	10	-
Highest Reported values	0.066	1.463	1.029	-
Exposure Ratio	0.041	0.146	0.103	0.290

Appendix A. Plots of SAR / IPD Measurement

Please see the following pages.

Plot No. 1

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_BLE(1Mbps_0ch)_Top-Left_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Top-Left)	150.0 x 82.4 x 96.4	0007180

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Left	0.00	1.72	40.7
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
ISM 2.4 GHz Band	Bluetooth	2402.000	0	7.69	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-02-18)	EX3DV4 - SN7362 (2024-07-10)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	30.0 x 30.0 x30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-02-18
psSAR1g [W/kg]	0.051	0.048
psSAR10g [W/kg]	0.028	0.027
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		-0.14
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	82.6
Dist 3dB Peak [mm]	N/A	14.8

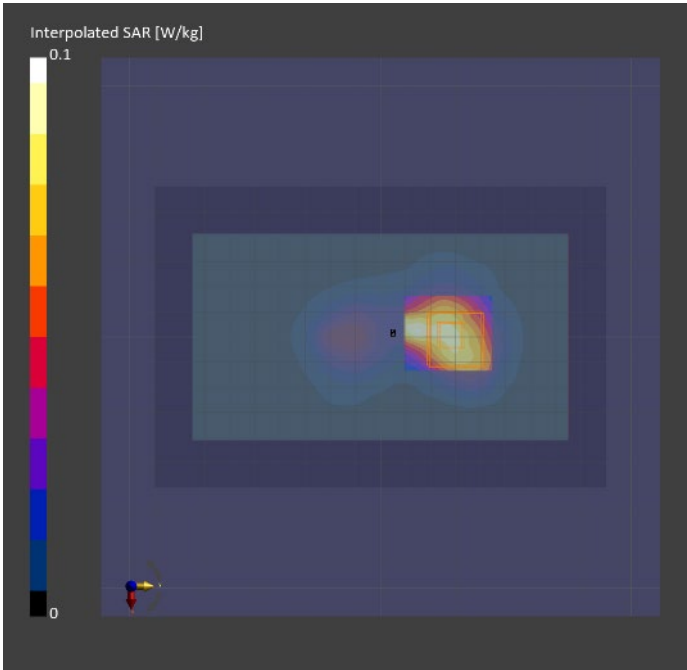

Plot No. 2
Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W24G(Chain 0_11b_1Mbps_6ch)_Tbp-Left_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Tbp-Left)	150.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Left	0.00	1.74	40.7
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
WLAN 2.4GHz	WLAN	2437.000	6	7.69	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-02-18)	EX3DV4 - SN7362 (2024-07-10)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	30.0 x 30.0 x30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-02-18
psSAR1g [W/kg]	0.047	0.046
psSAR10g [W/kg]	0.025	0.025
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		-0.19
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	81.1
Dist 3dB Peak [mm]	N/A	10.3

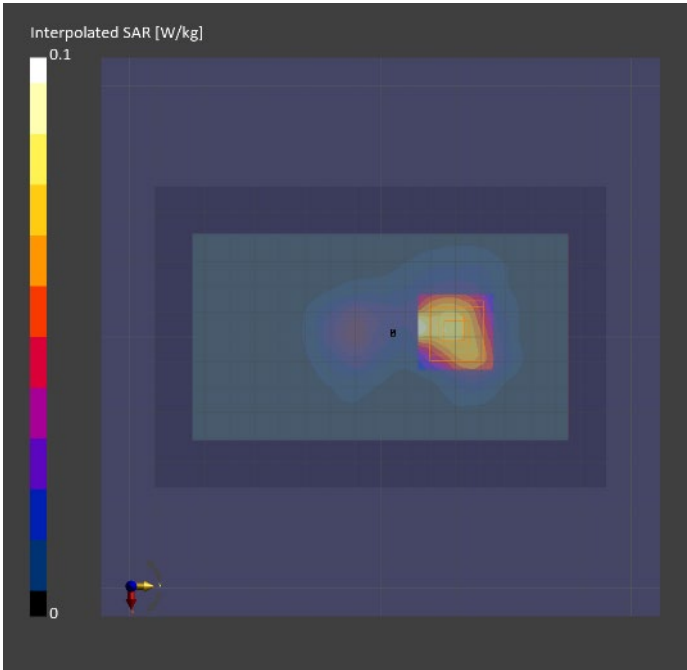

Plot No. 3

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W24G(Chain 1_11b_1Mbps_6ch)_Tbp-Right_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Tbp-Right)	152.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Right	0.00	1.74	40.7
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
WLAN 2.4GHz	WLAN	2437.000	6	7.69	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-02-18)	EX3DV4 - SN7362 (2024-07-10)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-02-18
psSAR1g [W/kg]	0.169	0.191
psSAR10g [W/kg]	0.076	0.074
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		-0.17
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	77.9
Dist 3dB Peak [mm]	N/A	5.4

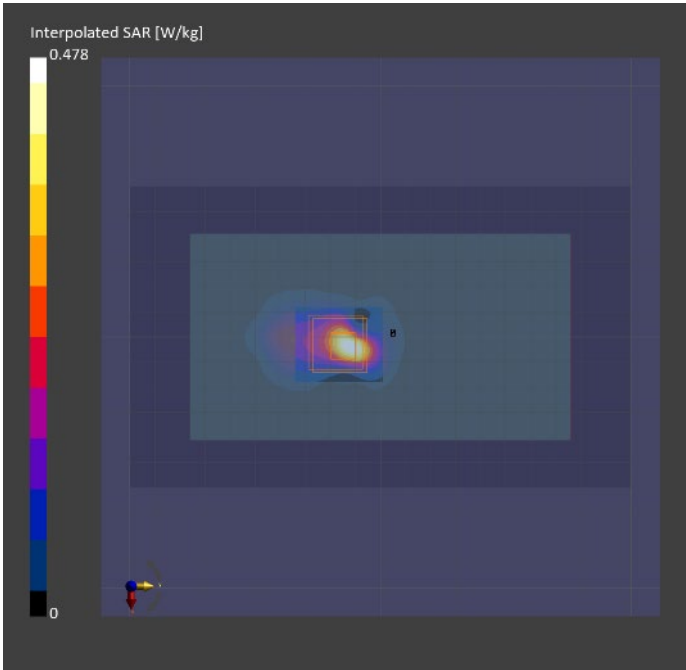

Plot No. 4

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W53G(Chain 0_11ax_HE160_MCS0_50ch)_Top-Left_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Top-Left)	150.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Left	0.00	4.61	36.4
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
U-NII-1, U-NII-2A	WLAN	5250.000	50	5.62	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-04)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-04
psSAR1g [W/kg]	0.023	0.037
psSAR10g [W/kg]	0.008	0.008
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		-0.19
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	55.2
Dist 3dB Peak [mm]	N/A	5.2

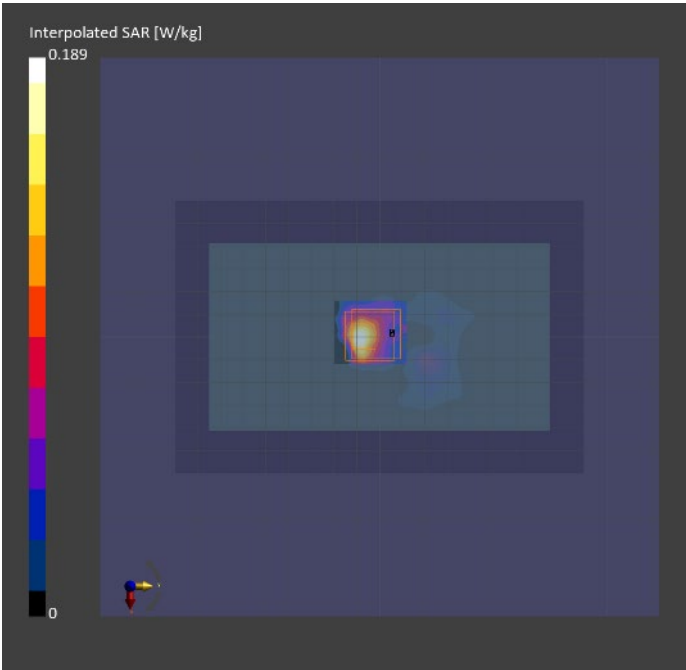

Plot No. 5
Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W53G(Chain 1_11ax_HE160_MCS0_50ch)_Top-Right_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Top-Right)	152.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Right	0.00	4.61	36.4
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
U-NII-1, U-NII-2A	WLAN	5250.000	50	5.62	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-04)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-04
psSAR1g [W/kg]	0.018	0.028
psSAR10g [W/kg]	0.004	0.006
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		0.00
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	64.5
Dist 3dB Peak [mm]	N/A	4.8

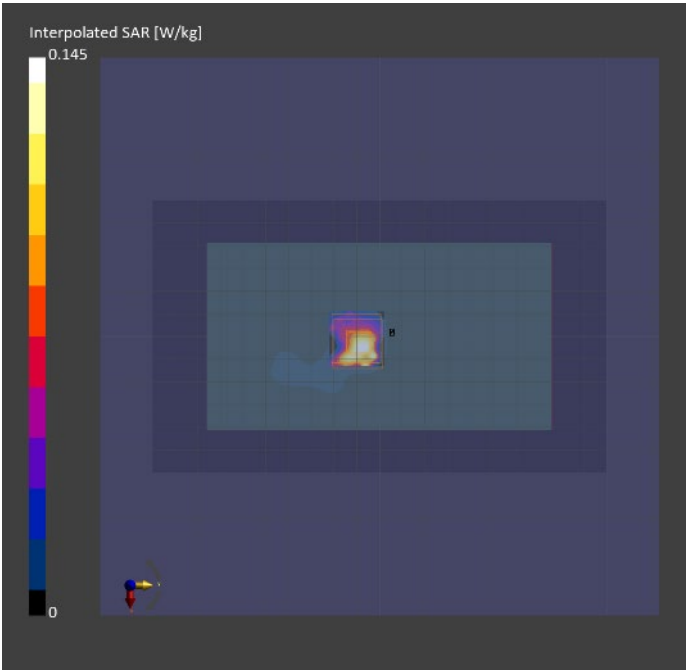

Plot No. 6
Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W56G(Chain 0_11ax_HE160_MCS0_114ch)_Tbp-Left_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Tbp-Left)	150.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Left	0.00	4.90	35.6
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
WLAN 5GHz	WLAN	5570.000	114	5.15	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-05)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-05
psSAR1g [W/kg]	0.038	0.057
psSAR10g [W/kg]	0.013	0.017
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		0.00
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	61.5
Dist 3dB Peak [mm]	N/A	4.1

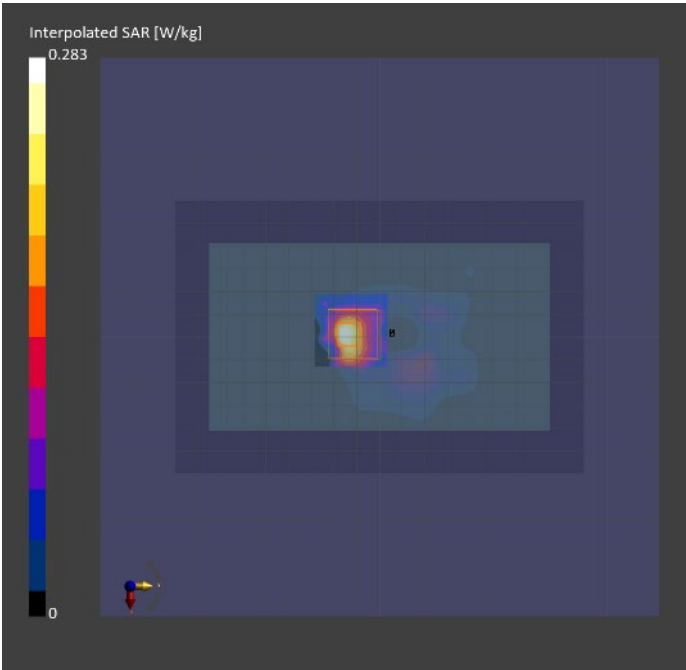

Plot No. 7
Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W56G(Chain 1_11ax_HE160_MCS0_114ch)_Back_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Back)	130.3 x 96.4 x 82.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Back	0.00	4.90	35.6
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
WLAN 5GHz	WLAN	5570.000	114	5.15	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-05)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 180.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-05
psSAR1g [W/kg]	0.093	0.098
psSAR10g [W/kg]	0.030	0.032
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		0.00
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	65.0
Dist 3dB Peak [mm]	N/A	6.4

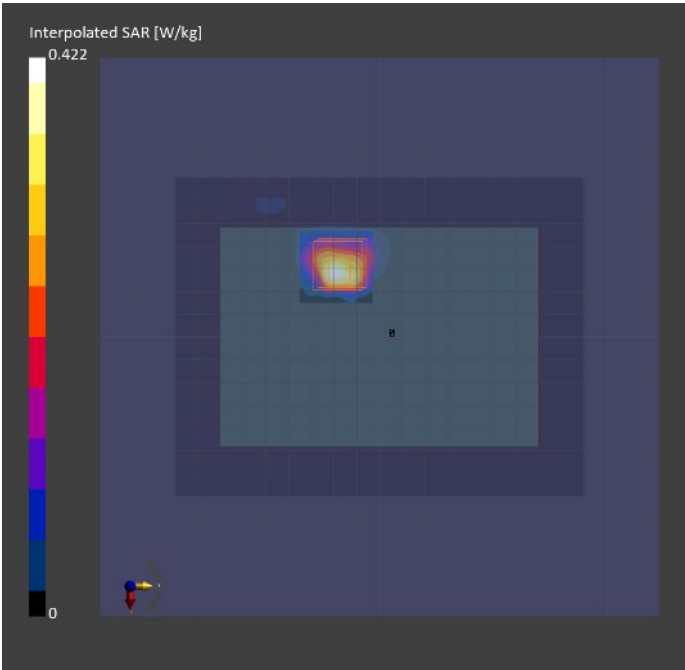

Plot No. 8

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W58G(Chain 0_11ac_VHT80_MCS0_155ch)_Tbp-Left_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Tbp-Left)	150.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Left	0.00	5.19	36.4
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
WLAN 5GHz	WLAN	5775.000	155	5.08	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-04)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-04
psSAR1g [W/kg]	0.045	0.046
psSAR10g [W/kg]	0.014	0.011
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		-0.16
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	60.5
Dist 3dB Peak [mm]	N/A	4.8

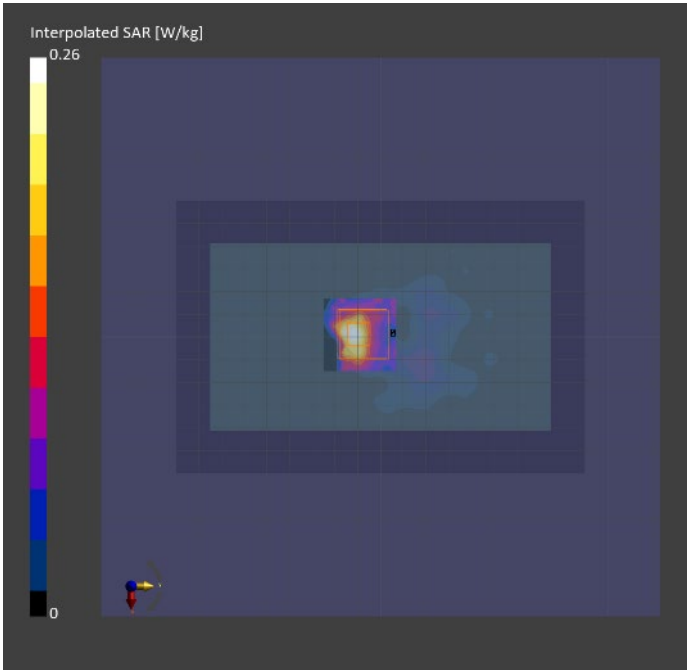

Plot No. 9

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W58G(Chain 1_11ac_VHT80_MCS0_155ch)_Tbp-Right_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Tbp-Right)	152.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Right	0.00	5.21	34.8
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
WLAN 5GHz	WLAN	5775.000	155	5.08	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-21)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-21
psSAR1g [W/kg]	0.143	0.123
psSAR10g [W/kg]	0.046	0.034
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		-0.17
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	59.0
Dist 3dB Peak [mm]	N/A	4.4

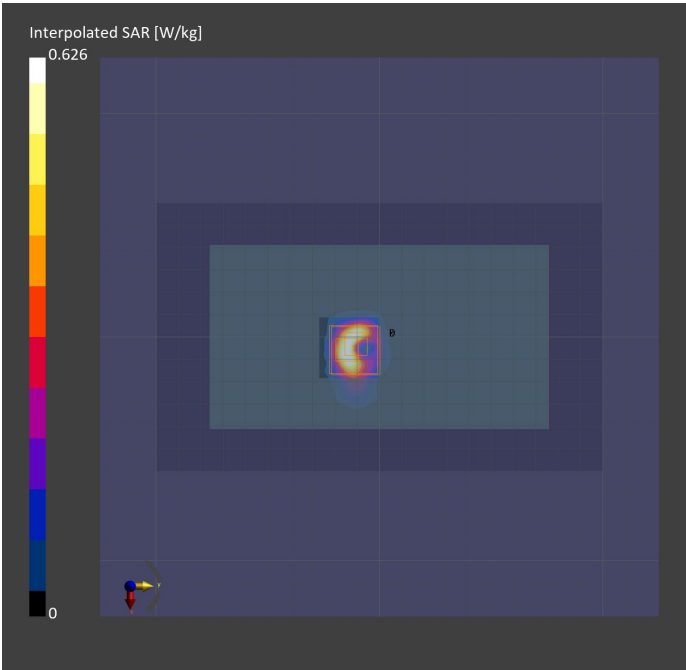

Plot No. 10

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W6G(Chain 0_11ax_HE160_MCS0_15ch)_Top-Left_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Top-Left)	150.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Left	0.00	5.34	34.0
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
U-NII-5	WLAN	6025.000	15	5.13	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-25)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 187.0	22.0 x 22.0 x22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-25
psSAR1g [W/kg]	0.042	0.040
psSAR10g [W/kg]	0.013	0.013
psAPD (1.0cm2, sq) [W/m2]	N/A	0.397
psAPD (4.0cm2, sq) [W/m2]	N/A	0.286
Power Drift [dB]		-0.18
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	62.1
Dist 3dB Peak [mm]	N/A	4.2

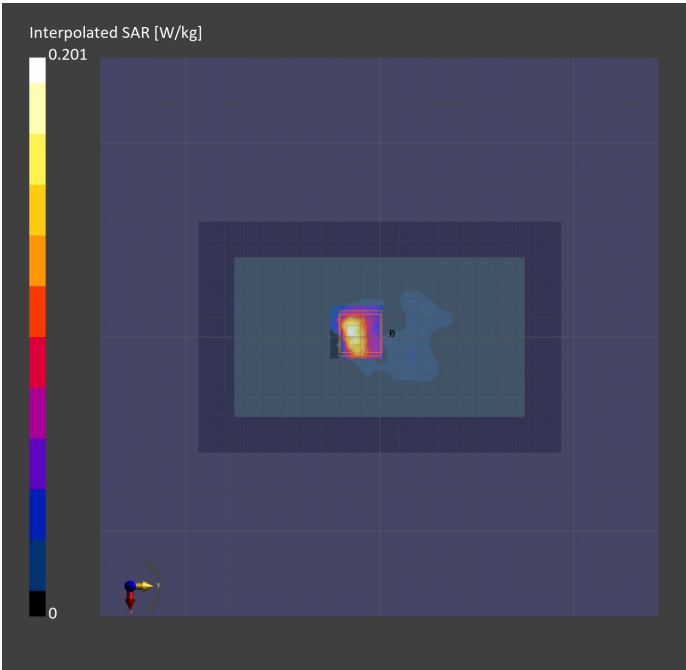

Plot No. 11

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W6G(Chain 1_11ax_HE160_MCS0_15ch)_Top-Right_0mm

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Top-Right)	152.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating Liquid	Top-Right	0.00	5.49	34.2
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
U-NII-5	WLAN	6025.000	15	5.23	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-02-19)	EX3DV4 - SN3803 (2024-07-08)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 187.0	22.0 x 22.0 x22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		Y
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-02-19
psSAR1g [W/kg]	0.064	0.070
psSAR10g [W/kg]	0.013	0.016
psAPD (1.0cm2, sq) [W/m2]	N/A	0.705
psAPD (4.0cm2, sq) [W/m2]	N/A	0.370
Power Drift [dB]		0.05
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	69.5
Dist 3dB Peak [mm]	N/A	4.8

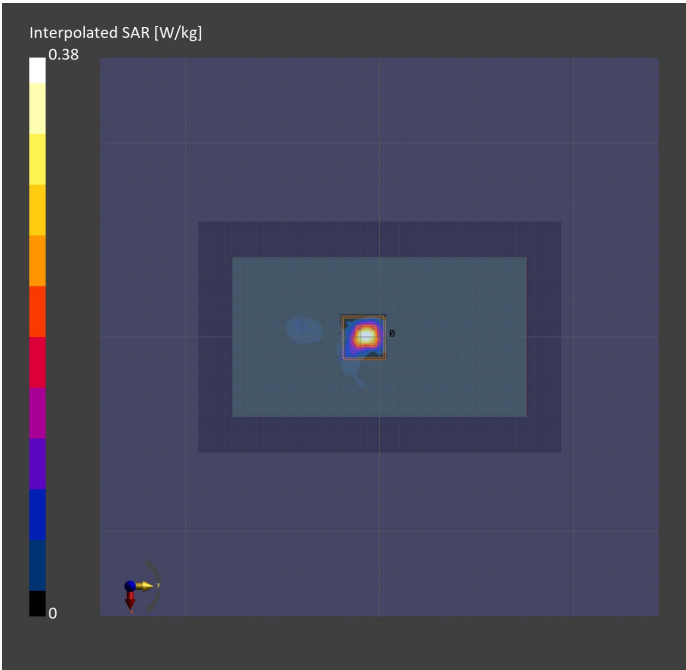

Plot No. 12
Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W6G(Chain 0_11ax_HE160_MCS0_207ch)_Top-Left

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Top-Left)	150.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor
5G Air	Top-Left	2.00	U-NII-8	WLAN	6985.0	207	1.0

Hardware Setup


mmWave Software Version	Phantom	Medium	Probe (Calibration Date)
3.2.2.2358	mmWave- 1122	Air	EUmmWV4 - SN9470_F1-55GHz (2024-04-09)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

5G Scan	
Grid Extents [mm]	40.0 x 40.0
Grid Steps [lambda]	0.047559807339951216 x 0.047559807339951216
Sensor Surface [mm]	2.0
MAIA	Y

Measurement Results

5G Scan	
Date	2025-03-24
Avg. Area [cm²]	4.00
Avg. Type	Square Averaging
psPDn+ [W/m²]	0.554
psPDtot+ [W/m²]	1.10
psPDmod+ [W/m²]	1.18
E _{max} [V/m]	25.3
Power Drift [dB]	0.05

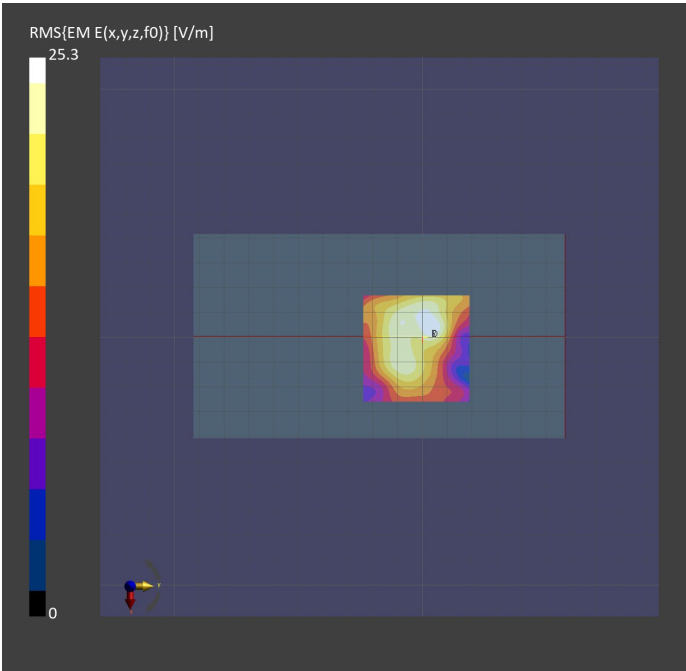

Plot No. 13

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for 2CX001_W6G(Chain 1_11ax_HE160_MCS0_47ch)_Top-Right

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
2CX001 (Top-Right)	152.0 x 82.4 x 96.4	0007122

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor
5G Air	Top-Right	2.00	U-NII-5	WLAN	6185.0	47	1.0

Hardware Setup


mmWave Software Version	Phantom	Medium	Probe (Calibration Date)
3.2.2.2358	mmWave- 1122	Air	EUmmWV4 - SN9470_F1-55GHz (2024-04-09)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

5G Scan	
Grid Extents [mm]	50.0 x 50.0
Grid Steps [lambda]	0.04211272847496038 x 0.04211272847496038
Sensor Surface [mm]	2.0
MAIA	Y

Measurement Results

5G Scan	
Date	2025-03-25
Avg. Area [cm²]	4.00
Avg. Type	Square Averaging
psPDn+ [W/m²]	0.368
psPDtot+ [W/m²]	0.722
psPDmod+ [W/m²]	1.09
E _{max} [V/m]	23.7
Power Drift [dB]	0.19

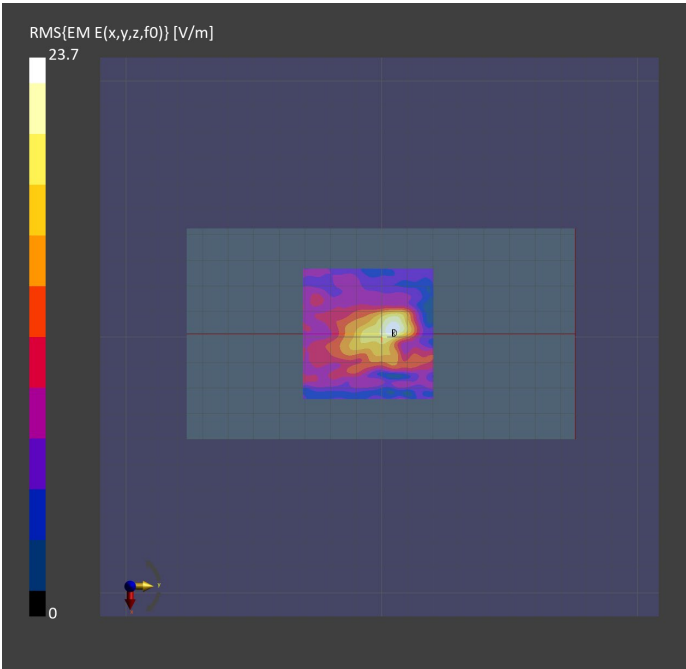

Appendix B. Plots of System Check

Please see the following pages.

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D2450_HSL

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D2450V2 - SN936	50.0 x 10.0 x 290.0	-

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating	-	-	1.75	40.7
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
-	CW	2450.000	0	7.69	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-02-18)	EX3DV4 - SN7362 (2024-07-10)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-02-18
psSAR1g [W/kg]	13.9	13.9
psSAR10g [W/kg]	6.39	6.45
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		0.02
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	79.7
Dist 3dB Peak [mm]	N/A	9.0

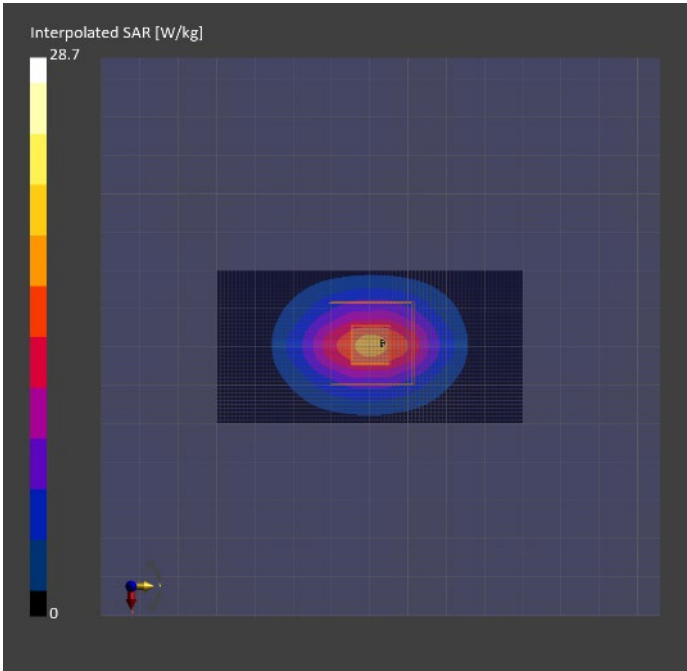

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D5200_HSL

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D5GHzV2 - SN1183	50.0 x 10.0 x 300.0	-

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating	-	-	4.51	36.4
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
-	CW	5200.000	0	5.62	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-04)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-04
psSAR1g [W/kg]	7.02	7.44
psSAR10g [W/kg]	2.00	2.14
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		0.09
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	63.1
Dist 3dB Peak [mm]	N/A	7.2

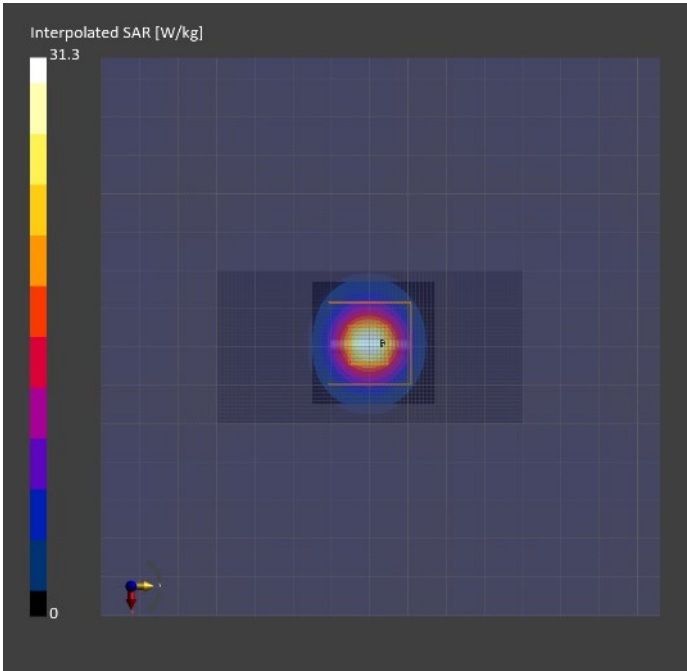

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D5600_HSL

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D5GHzV2 - SN1183	50.0 x 10.0 x 300.0	-

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating	-	-	4.96	35.5
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
-	CW	5600.000	0	5.15	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-05)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-05
psSAR1g [W/kg]	7.52	7.99
psSAR10g [W/kg]	2.10	2.26
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		0.09
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	60.0
Dist 3dB Peak [mm]	N/A	7.2

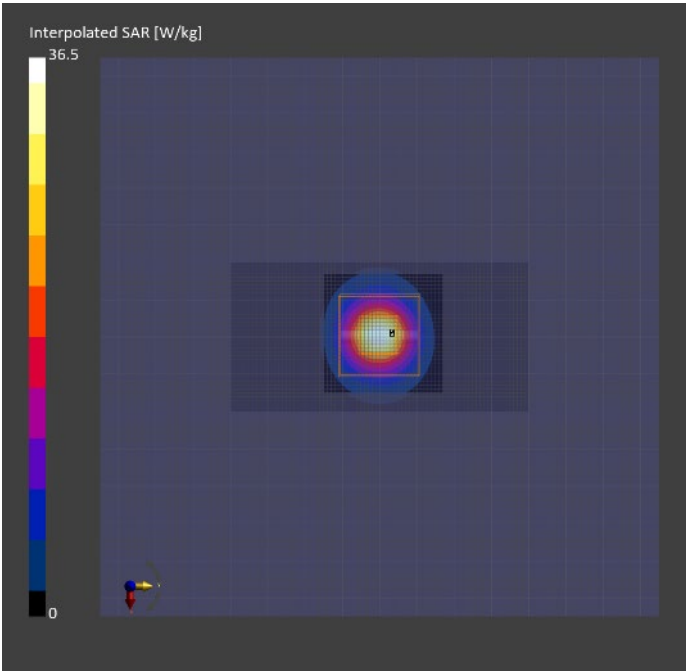

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D5800_HSL (1)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D5GHzV2 - SN1183	50.0 x 10.0 x 300.0	-

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating	-	-	5.12	36.3
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
-	CW	5800.000	0	5.08	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-04)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-04
psSAR1g [W/kg]	6.82	7.40
psSAR10g [W/kg]	1.93	2.11
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		0.01
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	57.6
Dist 3dB Peak [mm]	N/A	7.2

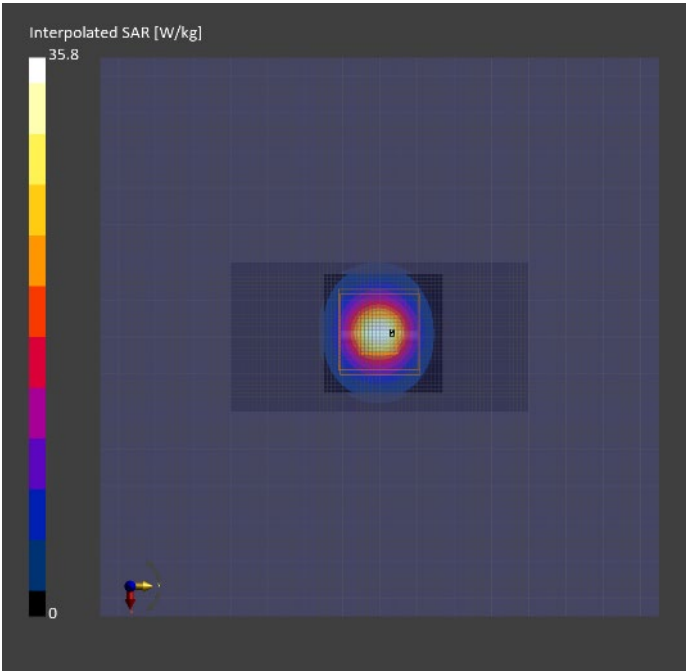

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D5800_HSL (2)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D5GHzV2 - SN1183	50.0 x 10.0 x 300.0	-

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating	-	-	5.20	34.9
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
-	CW	5800.000	0	5.08	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-03-21)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-21
psSAR1g [W/kg]	7.54	7.77
psSAR10g [W/kg]	2.13	2.21
psAPD (1.0cm2, sq) [W/m2]	N/A	N/A
psAPD (4.0cm2, sq) [W/m2]	N/A	N/A
Power Drift [dB]		-0.08
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	58.1
Dist 3dB Peak [mm]	N/A	7.3

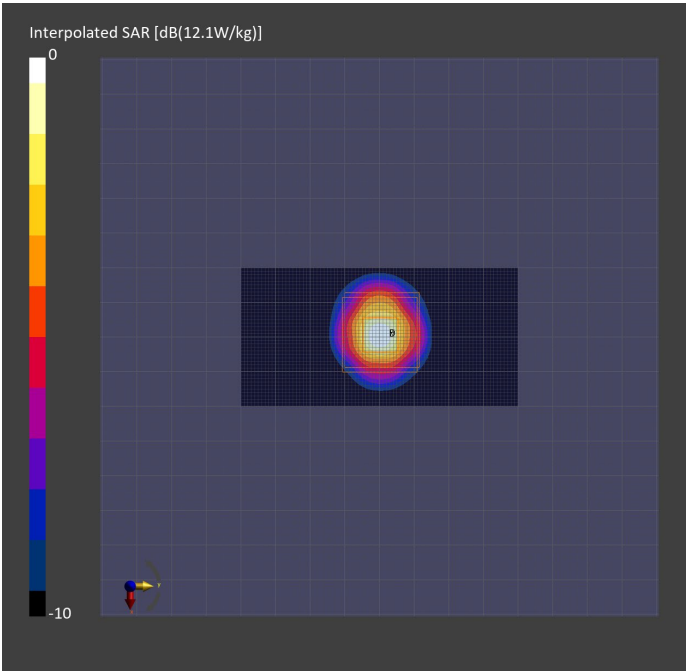

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D6500_HSL (1)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D6.5GHzV2 - SN1103	50.0 x 10.0 x 296.0	-

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating	-	-	6.07	33.7
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
-	CW	6500.000	0	5.23	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-02-19)	EX3DV4 - SN3803 (2024-07-08)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-02-19
psSAR1g [W/kg]	26.2	29.9
psSAR8g [W/kg]	6.17	6.76
psSAR10g [W/kg]	5.12	5.59
psAPD (1.0cm2, sq) [W/m2]	N/A	299
psAPD (4.0cm2, sq) [W/m2]	N/A	135
Power Drift [dB]		-0.02
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	51.1
Dist 3dB Peak [mm]	N/A	4.4

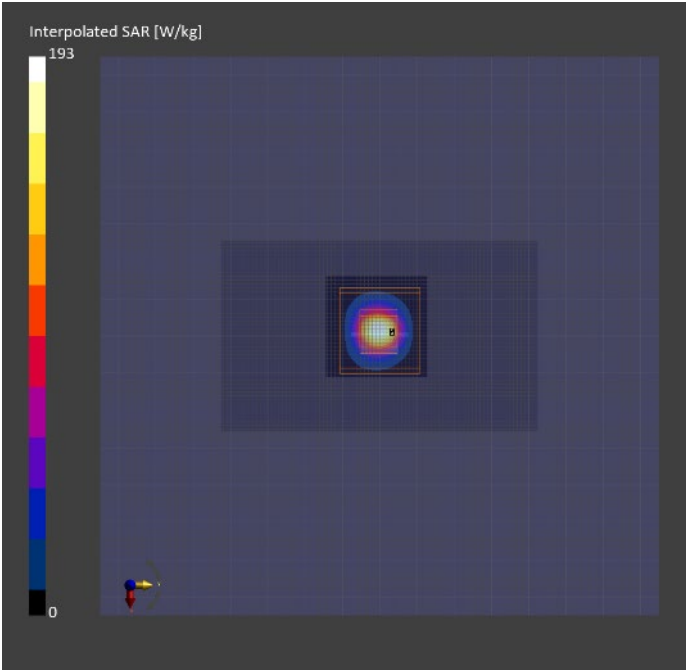

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D6500_HSL (2)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D6.5GHzV2 - SN1103	50.0 x 10.0 x 296.0	-

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating	-	-	5.97	35.3
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
-	CW	6500.000	0	5.23	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-02-20)	EX3DV4 - SN3803 (2024-07-08)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-02-20
psSAR1g [W/kg]	27.2	30.4
psSAR8g [W/kg]	6.28	6.84
psSAR10g [W/kg]	5.20	5.68
psAPD (1.0cm2, sq) [W/m2]	N/A	304
psAPD (4.0cm2, sq) [W/m2]	N/A	137
Power Drift [dB]		0.01
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	50.9
Dist 3dB Peak [mm]	N/A	4.8

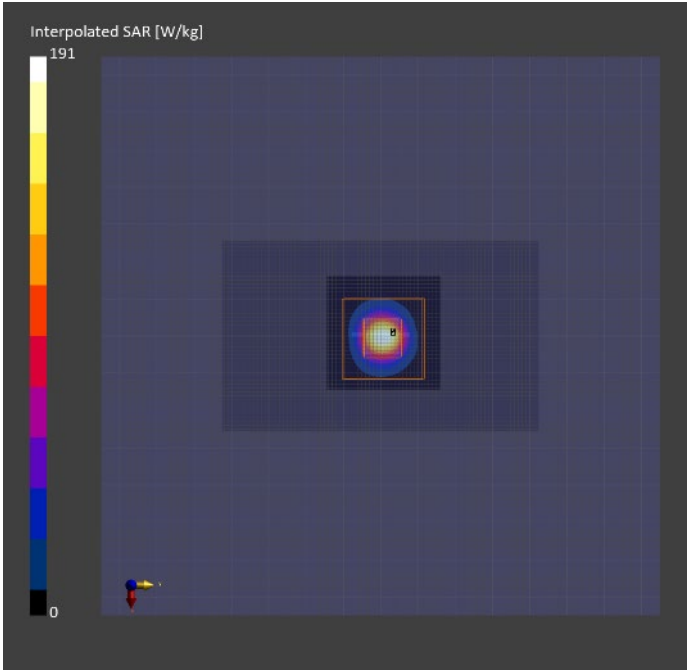

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D6500_HSL (3)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D6.5GHzV2 - SN1103	50.0 x 10.0 x 296.0	-

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating	-	-	6.00	33.5
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
-	CW	6500.000	0	5.23	

Hardware Setup


DASY8 Software Version	Phantom	TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)- 1259	HBBL-600-10000 (2025-02-25)	EX3DV4 - SN3803 (2024-07-08)
DAE (Calibration Date)			
DAE4 Sn482 (2025-01-13)			

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-02-25
psSAR1g [W/kg]	26.0	29.8
psSAR8g [W/kg]	6.18	6.69
psSAR10g [W/kg]	5.12	5.53
psAPD (1.0cm2, sq) [W/m2]	N/A	298
psAPD (4.0cm2, sq) [W/m2]	N/A	134
Power Drift [dB]		-0.06
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	51.0
Dist 3dB Peak [mm]	N/A	4.8

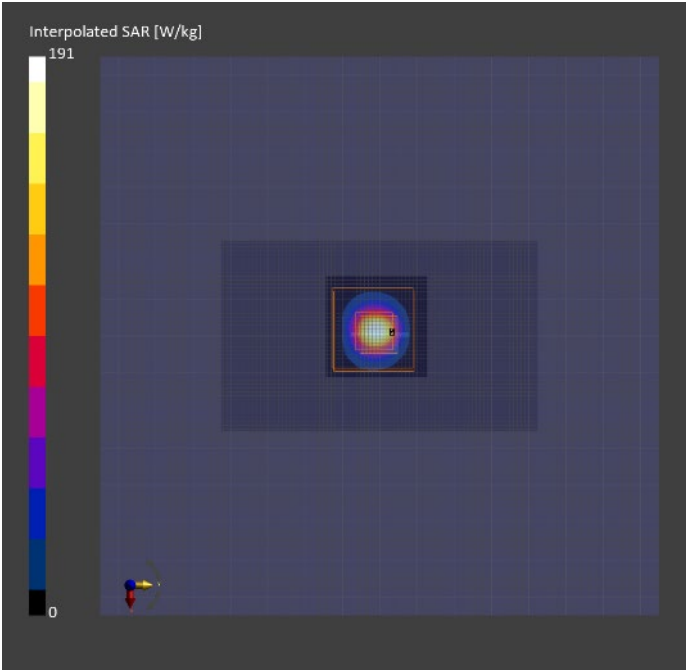

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_D6500_HSL (4)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
D6.5GHzV2 - SN1103	50.0 x 10.0 x 296.0	

Exposure Conditions

Phantom Section	TSL	Position	Test Distance [mm]	TSL Conductivity [S/m]	TSL Permittivity
Flat	Head Simulating			5.90	33.4
Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor	
	CW	6500.000	0	5.13	

Hardware Setup


DASY8 Software Version	Phantom		TSL (Measured Date)	Probe (Calibration Date)
16.4.0.5005	ELI V5.0 (20deg probe tilt)-	1259	HBBL-600-10000 (2025-03-25)	EX3DV4 - SN7452 (2025-02-13)
DAE (Calibration Date)				
DAE4 Sn482 (2025-01-13)				

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA		N/A
Surface Detection		VMS + 6p
Scan Method		Measured

Measurement Results

	Area Scan	Zoom Scan
Date		2025-03-25
psSAR1g [W/kg]	26.4	29.4
psSAR8g [W/kg]	6.18	6.64
psSAR10g [W/kg]	5.13	5.48
psAPD (1.0cm2, sq) [W/m2]	N/A	294
psAPD (4.0cm2, sq) [W/m2]	N/A	133
Power Drift [dB]		-0.01
Power Scaling		Disabled
TSL Correction		Positive only
M2/M1 [%]	N/A	51.2
Dist 3dB Peak [mm]	N/A	4.6

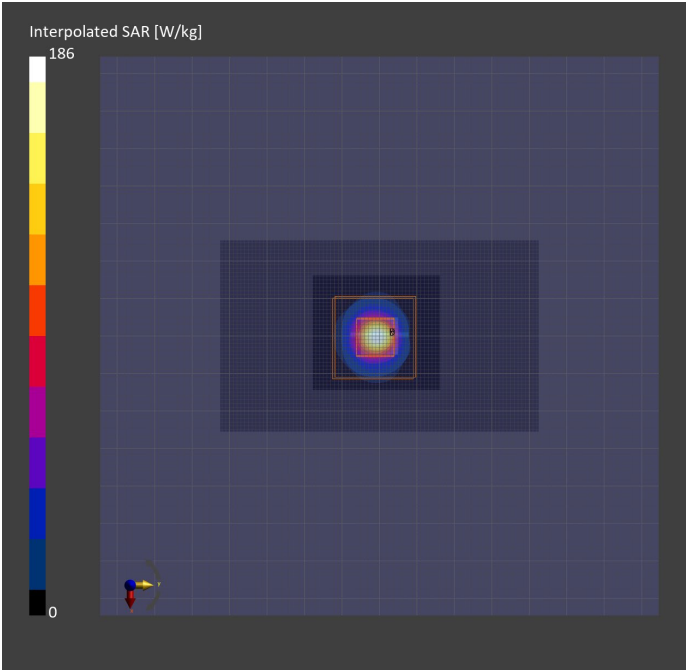

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_10GHz (1)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
10G ANT	100.0 x 100.0 x 172.0	1073

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor
5G Air	FRONT	10.00	Validation band	CW	10000.0	10000	1.0

Hardware Setup

mmWave Software Version	Phantom	Medium	Probe (Calibration Date)
3.2.2.2358	mmWave- 1122	Air	EUmmWV4 - SN9470_F1-55GHz (2024-04-09)

DAE (Calibration Date)


DAE4 Sn482 (2025-01-13)

Scan Setup

5G Scan	
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0
MAIA	N/A

Measurement Results

5G Scan	
Date	2025-03-24
Avg. Area [cm²]	4.00
Avg. Type	Square Averaging
psPDn+ [W/m²]	54.2
psPDtot+ [W/m²]	54.5
psPDmod+ [W/m²]	54.8
E _{max} [V/m]	149
Power Drift [dB]	-0.02

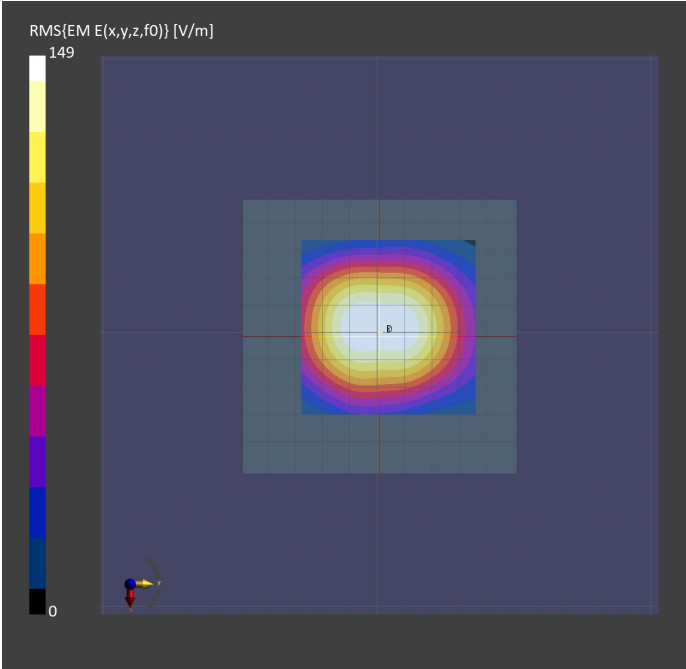

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_10GHz (2)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
10G ANT	100.0 x 100.0 x 172.0	1073

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor
5G Air	FRONT	10.00	Validation band	CW	10000.0	10000	1.0

Hardware Setup

mmWave Software Version	Phantom	Medium	Probe (Calibration Date)
3.2.2.2358	mmWave- 1122	Air	EUmmWV4 - SN9470_F1-55GHz (2024-04-09)

DAE (Calibration Date)


DAE4 Sn482 (2025-01-13)

Scan Setup

5G Scan	
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0
MAIA	N/A

Measurement Results

5G Scan	
Date	2025-03-25
Avg. Area [cm²]	4.00
Avg. Type	Square Averaging
psPDn+ [W/m²]	53.9
psPDtot+ [W/m²]	54.3
psPDmod+ [W/m²]	54.7
E _{max} [V/m]	150
Power Drift [dB]	0.01

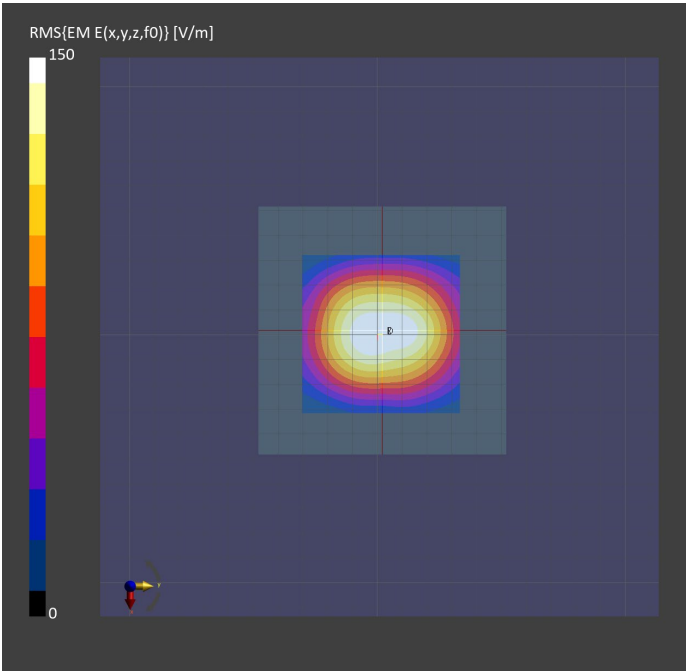

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 3

Measurement Report for System Check_10GHz (3)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number
10G ANT	100.0 x 100.0 x 172.0	1073

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Group	Frequency [MHz]	Channel Number [Ch]	Conversion Factor
5G Air	FRONT	10.00	Validation band	CW	10000.0	10000	1.0

Hardware Setup

mmWave Software Version	Phantom	Medium	Probe (Calibration Date)
3.2.2.2358	mmWave- 1122	Air	EUmmWV4 - SN9470_F1-55GHz (2024-04-09)

DAE (Calibration Date)

DAE4 Sn482 (2025-01-13)

Scan Setup

5G Scan	
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0
MAIA	N/A

Measurement Results

5G Scan	
Date	2025-03-26
Avg. Area [cm²]	4.00
Avg. Type	Square Averaging
psPDn+ [W/m²]	55.7
psPDtot+ [W/m²]	56.0
psPDmod+ [W/m²]	56.3
E _{max} [V/m]	153
Power Drift [dB]	-0.03

