


Report No.: TMWK2308002691KR

Page 139 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :51


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

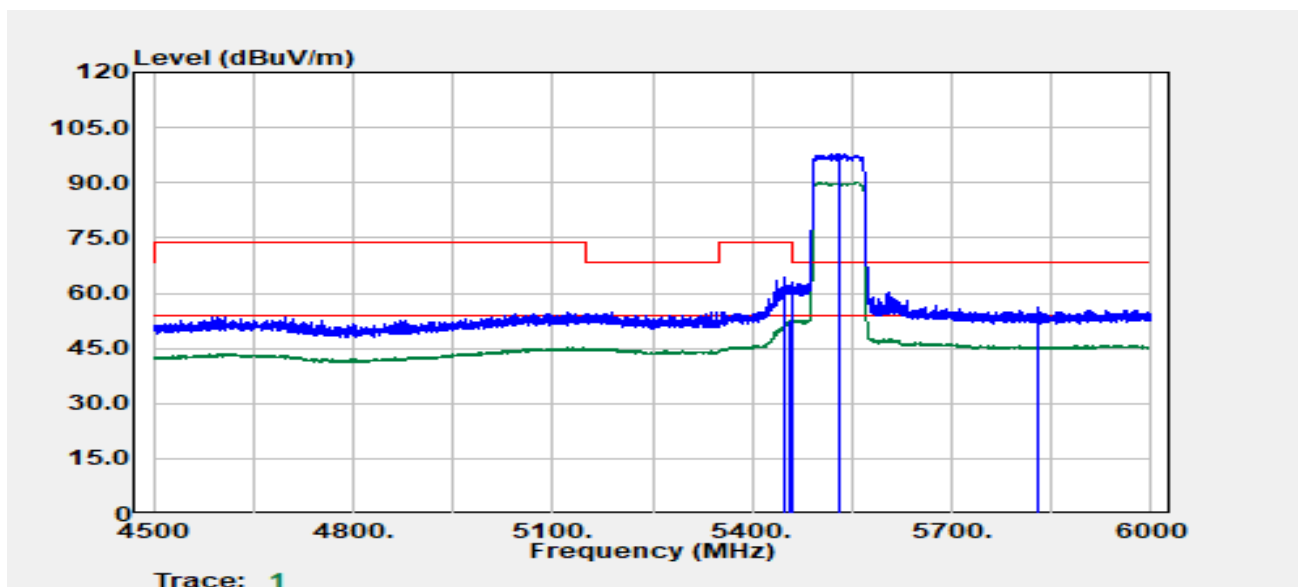

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5448.900	Peak	51.97	12.37	64.35	74.00	-9.65
5455.500	Average	40.25	12.39	52.65	54.00	-1.35
5460.600	Peak	50.45	12.41	62.86	68.20	-5.34
5530.000	Peak	84.92	12.77	97.69	--	--
5530.000	Average	77.33	12.77	90.10	--	--
5831.400	Peak	41.87	14.07	55.94	68.20	-12.26

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

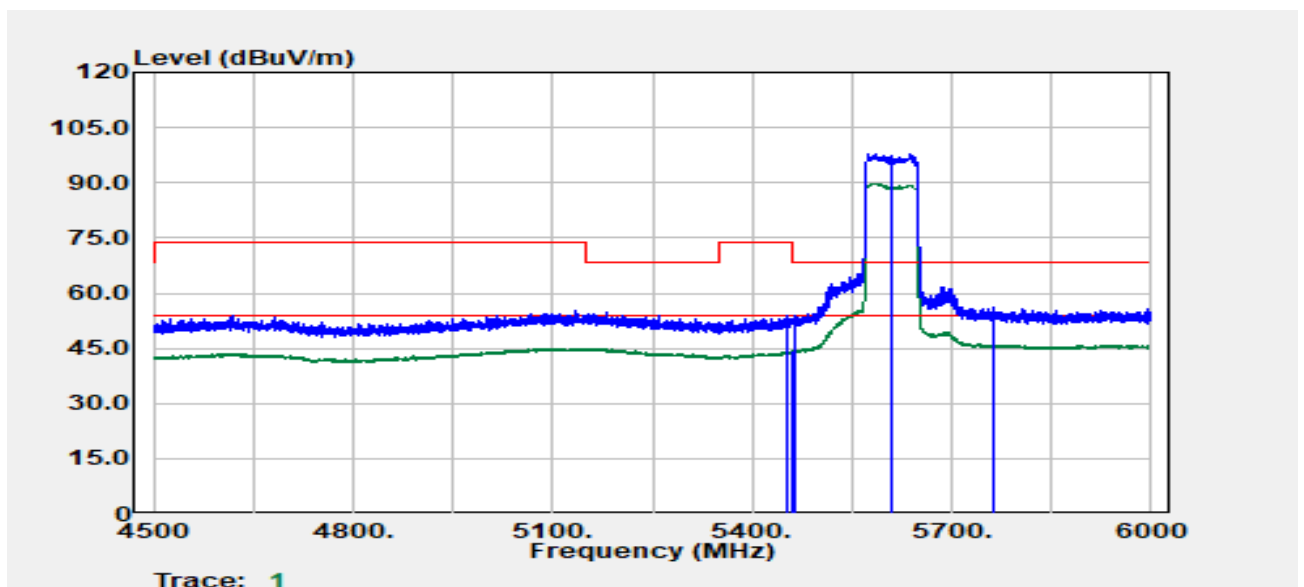

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5451.000	Peak	41.47	12.38	53.85	74.00	-20.15
5460.000	Average	31.87	12.41	44.28	54.00	-9.72
5464.800	Peak	41.36	12.43	53.79	68.20	-14.41
5610.000	Peak	85.00	12.92	97.92	--	--
5610.000	Average	76.88	12.92	89.80	--	--
5763.600	Peak	42.23	13.91	56.14	68.20	-12.06

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

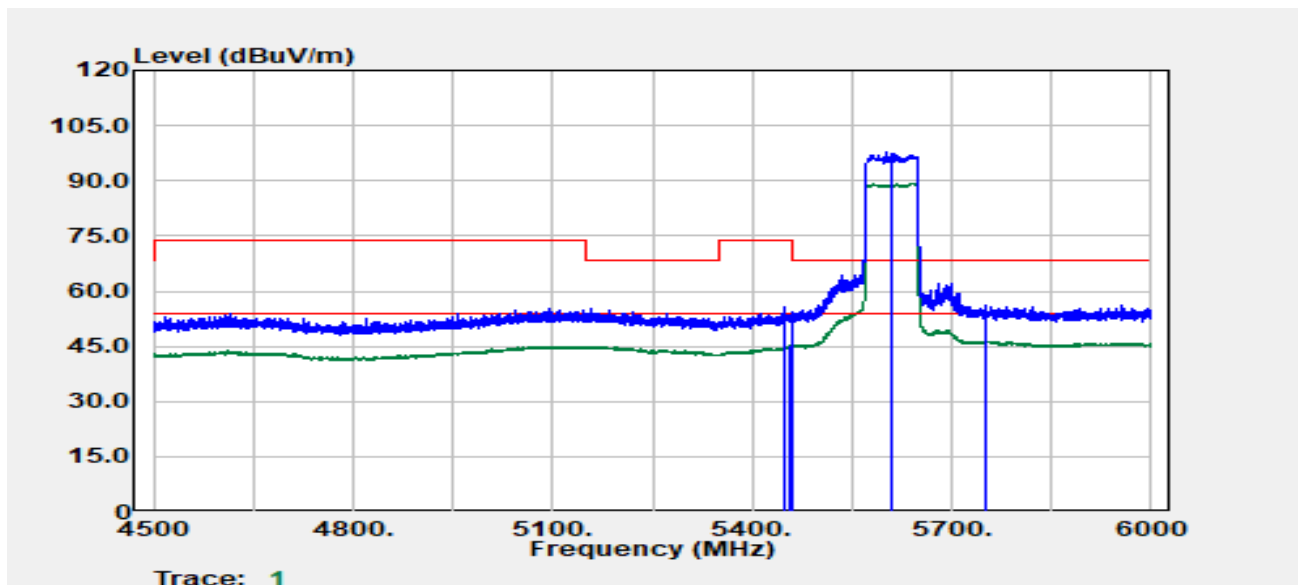

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5449.200	Peak	43.27	12.37	55.65	74.00	-18.35
5457.300	Average	32.71	12.40	45.11	54.00	-8.89
5462.100	Peak	41.86	12.42	54.28	68.20	-13.92
5610.000	Peak	84.91	12.92	97.83	--	--
5610.000	Average	76.41	12.92	89.33	--	--
5750.400	Peak	42.32	13.82	56.14	68.20	-12.06

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

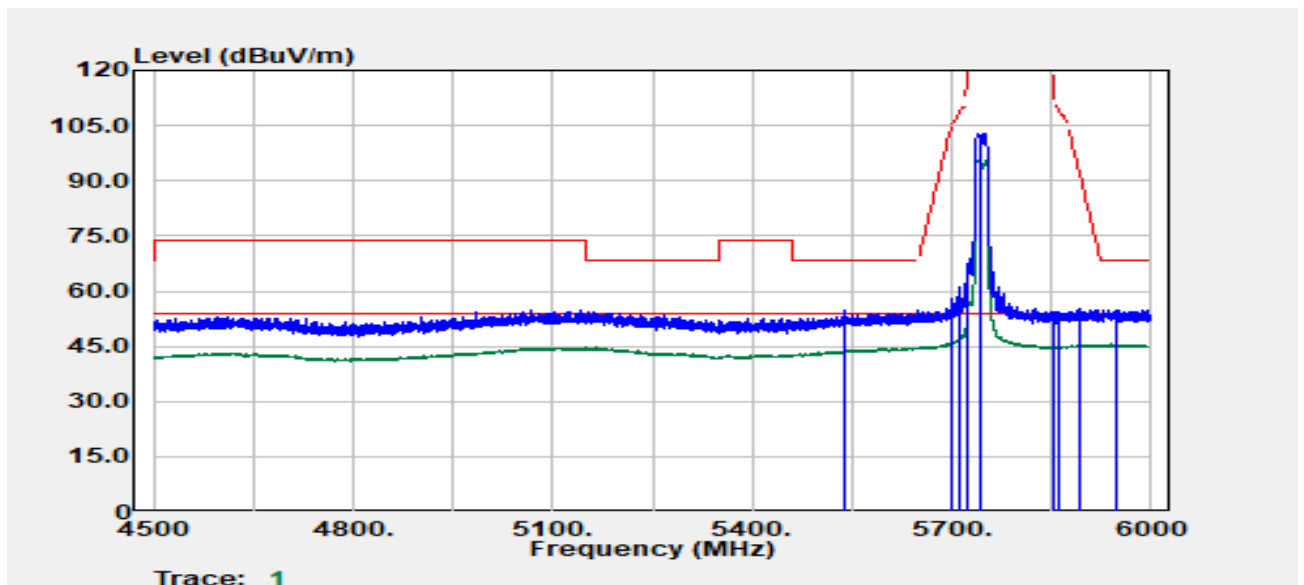

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5539.423	Peak	41.78	12.84	54.62	68.20	-13.58
5699.700	Peak	41.63	13.56	55.19	104.98	-49.79
5711.952	Peak	47.41	13.62	61.04	108.55	-47.51
5724.704	Peak	53.70	13.69	67.39	121.53	-54.13
5745.000	Peak	89.07	13.79	102.86	--	--
5745.000	Average	81.73	13.79	95.53	--	--
5853.726	Peak	40.48	14.02	54.50	113.70	-59.20
5861.727	Peak	40.40	14.02	54.42	108.91	-54.49
5892.982	Peak	41.23	14.03	55.26	91.86	-36.59
5947.991	Peak	40.66	14.15	54.81	68.20	-13.39

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

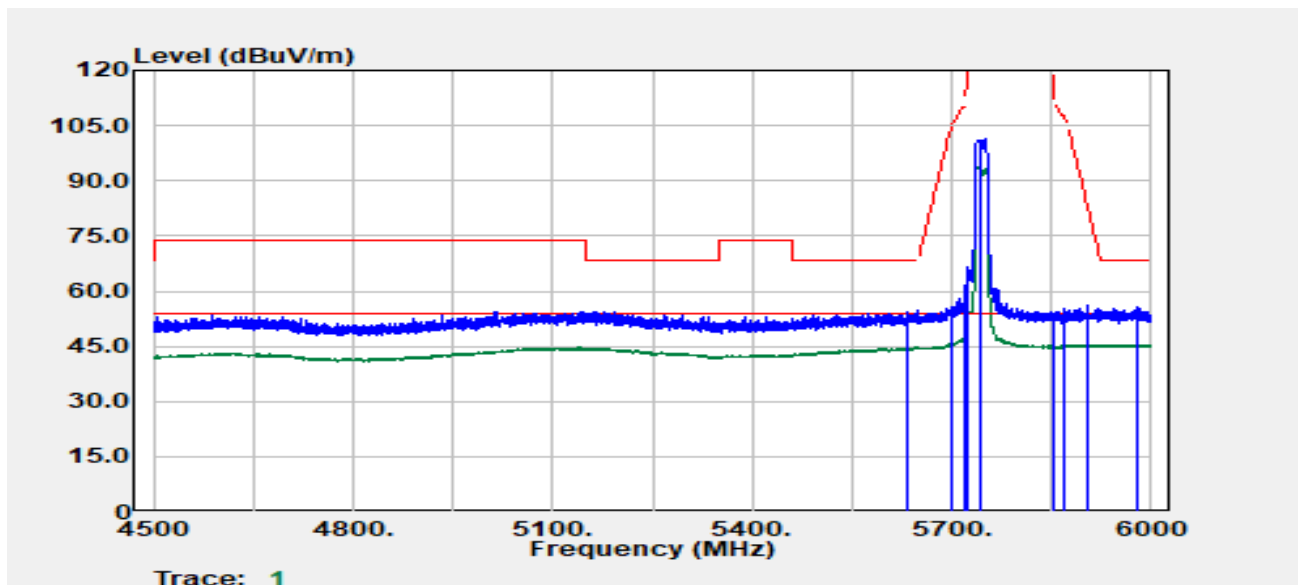

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5633.939	Peak	41.36	13.14	54.50	68.20	-13.70
5699.950	Peak	41.93	13.56	55.49	105.16	-49.67
5717.953	Peak	44.32	13.65	57.97	110.23	-52.26
5724.704	Peak	50.37	13.69	64.05	121.53	-57.47
5745.000	Peak	87.46	13.79	101.25	--	--
5745.000	Average	80.07	13.79	93.87	--	--
5852.726	Peak	39.70	14.02	53.72	115.98	-62.26
5869.228	Peak	41.22	14.02	55.25	106.81	-51.57
5904.984	Peak	42.16	14.04	56.21	82.97	-26.77
5978.997	Peak	41.37	14.15	55.52	68.20	-12.68

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

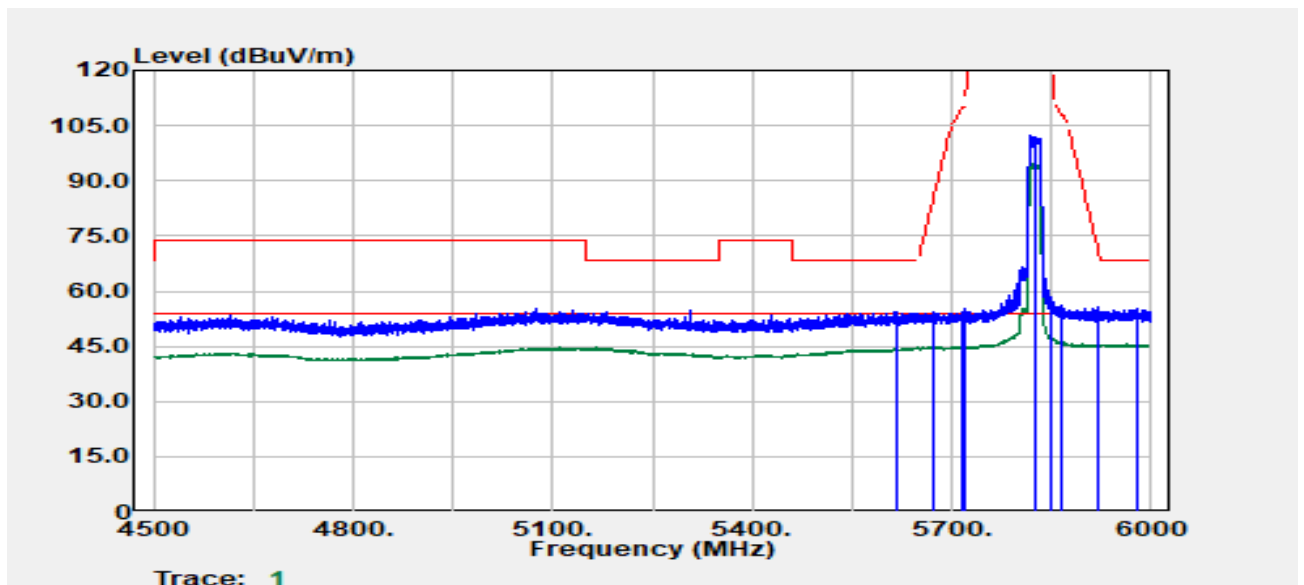

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5616.186	Peak	41.20	12.98	54.18	68.20	-14.02
5672.445	Peak	40.92	13.41	54.32	84.85	-30.53
5715.953	Peak	40.55	13.64	54.20	109.67	-55.47
5720.954	Peak	41.77	13.67	55.44	112.98	-57.54
5825.000	Peak	88.16	14.09	102.25	--	--
5825.000	Average	80.85	14.09	94.94	--	--
5850.000	Peak	44.27	14.02	58.29	122.20	-63.91
5863.727	Peak	42.32	14.02	56.34	108.35	-52.01
5921.487	Peak	41.68	14.09	55.76	70.79	-15.03
5980.497	Peak	40.96	14.15	55.12	68.20	-13.08

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

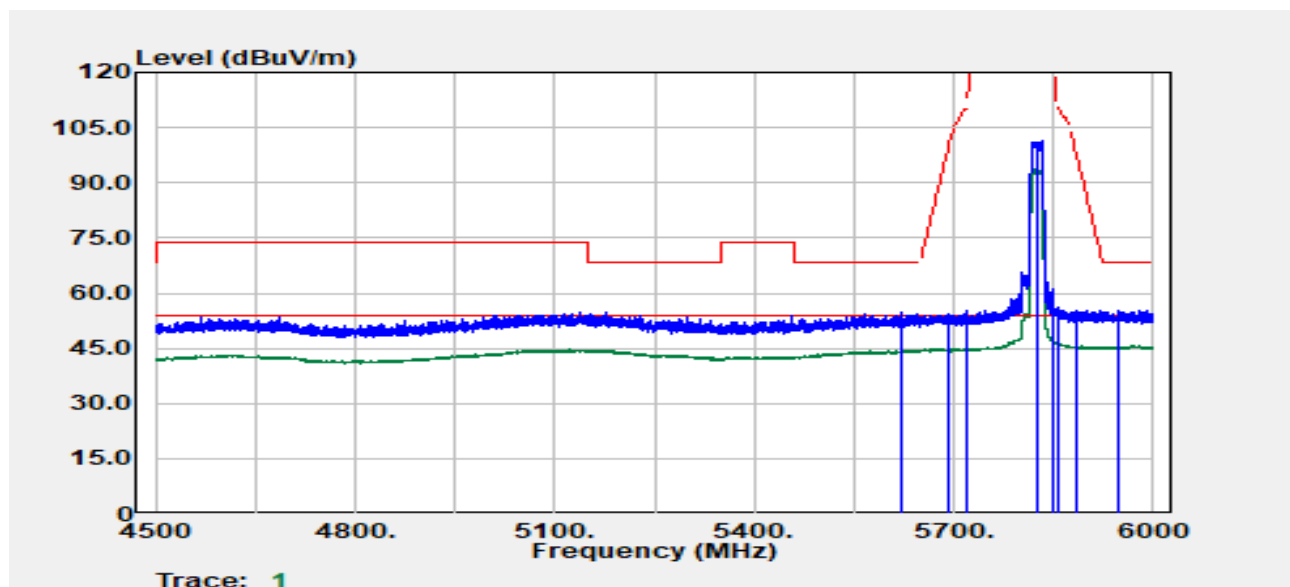

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5620.437	Peak	41.86	13.01	54.88	68.20	-13.32
5693.949	Peak	40.98	13.53	54.51	100.74	-46.23
5717.953	Peak	41.40	13.65	55.06	110.23	-55.17
5720.203	Peak	39.86	13.67	53.53	111.26	-57.74
5825.000	Peak	87.21	14.09	101.30	--	--
5825.000	Average	79.61	14.09	93.70	--	--
5850.475	Peak	45.47	14.02	59.49	121.12	-61.62
5856.976	Peak	42.35	14.02	56.37	110.25	-53.87
5886.231	Peak	41.14	14.03	55.17	96.86	-41.69
5946.991	Peak	40.98	14.15	55.13	68.20	-13.07

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

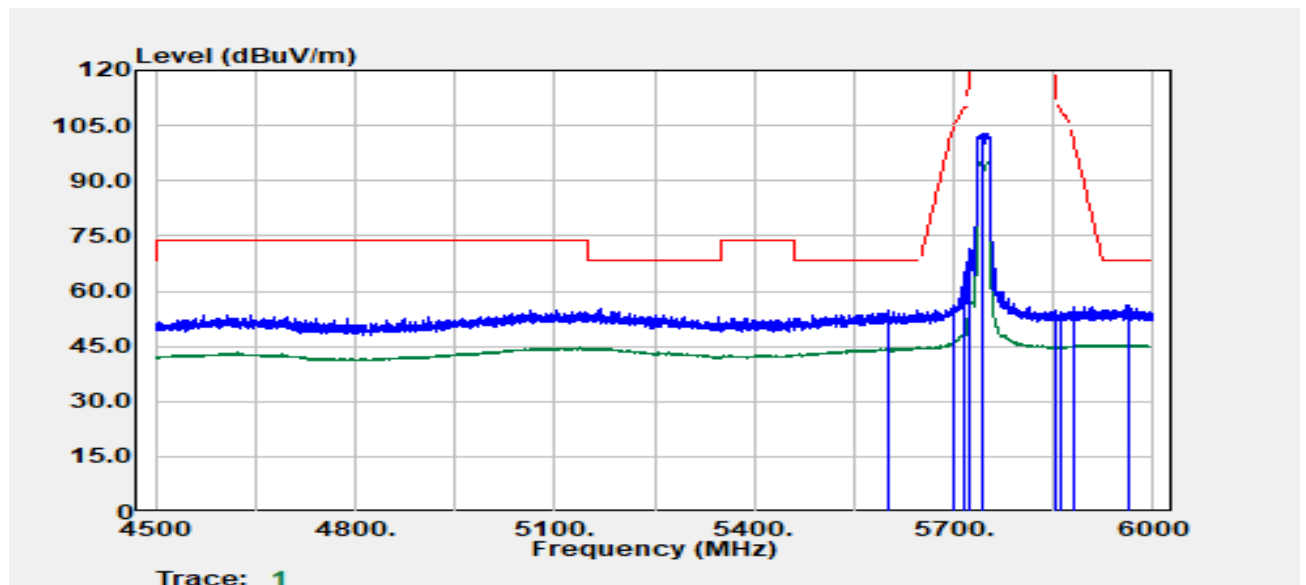

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5603.400	Peak	41.91	12.86	54.77	68.20	-13.43
5699.100	Peak	42.42	13.55	55.97	104.54	-48.56
5715.300	Peak	51.66	13.64	65.30	109.49	-44.19
5724.600	Peak	57.65	13.69	71.34	121.29	-49.95
5745.000	Peak	89.19	13.79	102.99	--	--
5745.000	Average	81.39	13.79	95.19	--	--
5851.500	Peak	40.56	14.02	54.58	118.78	-64.20
5861.700	Peak	40.46	14.02	54.48	108.92	-54.44
5881.500	Peak	41.61	14.03	55.64	100.37	-44.73
5964.300	Peak	41.99	14.16	56.15	68.20	-12.05

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

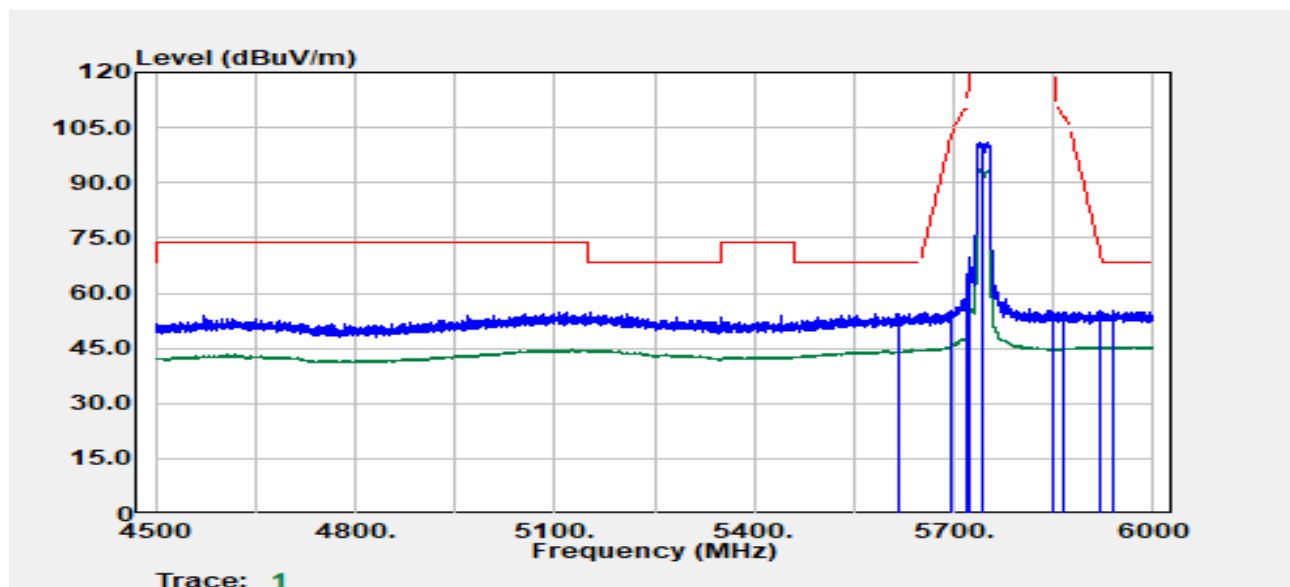

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5616.600	Peak	41.43	12.98	54.41	68.20	-13.79
5697.600	Peak	41.81	13.55	55.36	103.43	-48.08
5720.100	Peak	46.44	13.66	60.11	111.03	-50.92
5722.800	Peak	56.06	13.68	69.74	117.19	-47.45
5745.000	Peak	87.21	13.79	101.00	--	--
5745.000	Average	79.99	13.79	93.78	--	--
5851.200	Peak	40.93	14.02	54.95	119.46	-64.51
5864.400	Peak	40.83	14.02	54.85	108.17	-53.31
5921.100	Peak	41.15	14.08	55.23	71.07	-15.84
5941.500	Peak	40.90	14.14	55.03	68.20	-13.17

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

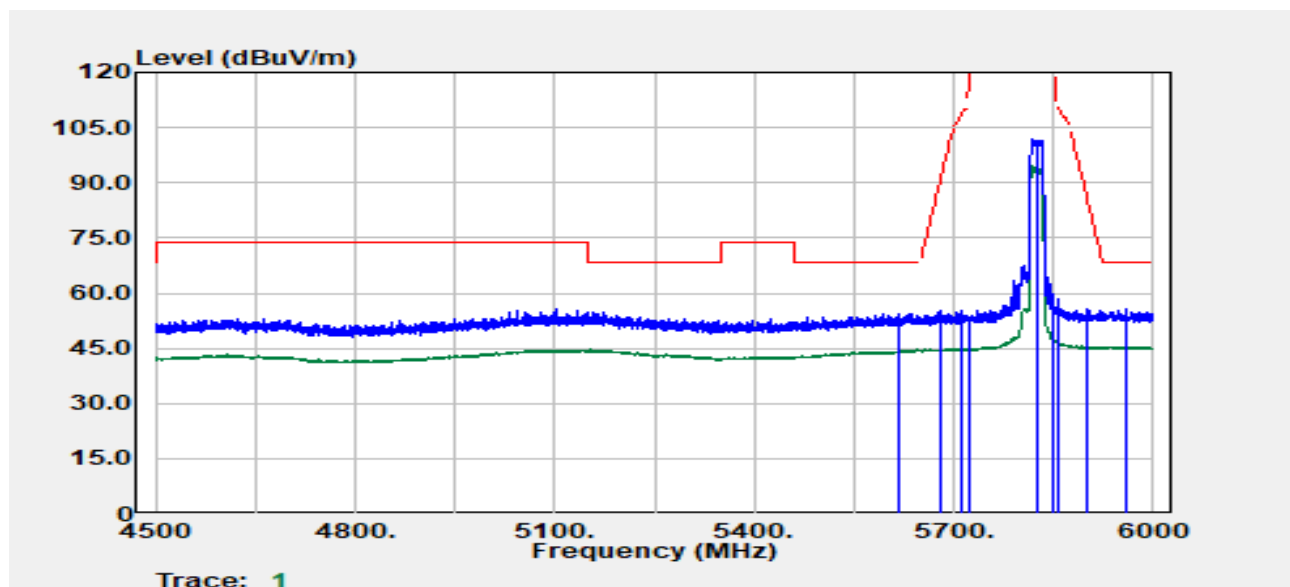

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5616.000	Peak	41.55	12.97	54.53	68.20	-13.67
5679.000	Peak	41.67	13.44	55.12	89.70	-34.58
5712.900	Peak	41.59	13.63	55.22	108.81	-53.59
5724.300	Peak	39.92	13.69	53.61	120.60	-66.99
5825.000	Peak	87.68	14.09	101.77	--	--
5825.000	Average	80.34	14.09	94.43	--	--
5850.300	Peak	42.42	14.02	56.44	121.52	-65.08
5855.700	Peak	44.54	14.02	58.56	110.60	-52.05
5899.500	Peak	41.44	14.03	55.47	87.03	-31.56
5959.500	Peak	41.43	14.16	55.59	68.20	-12.61

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

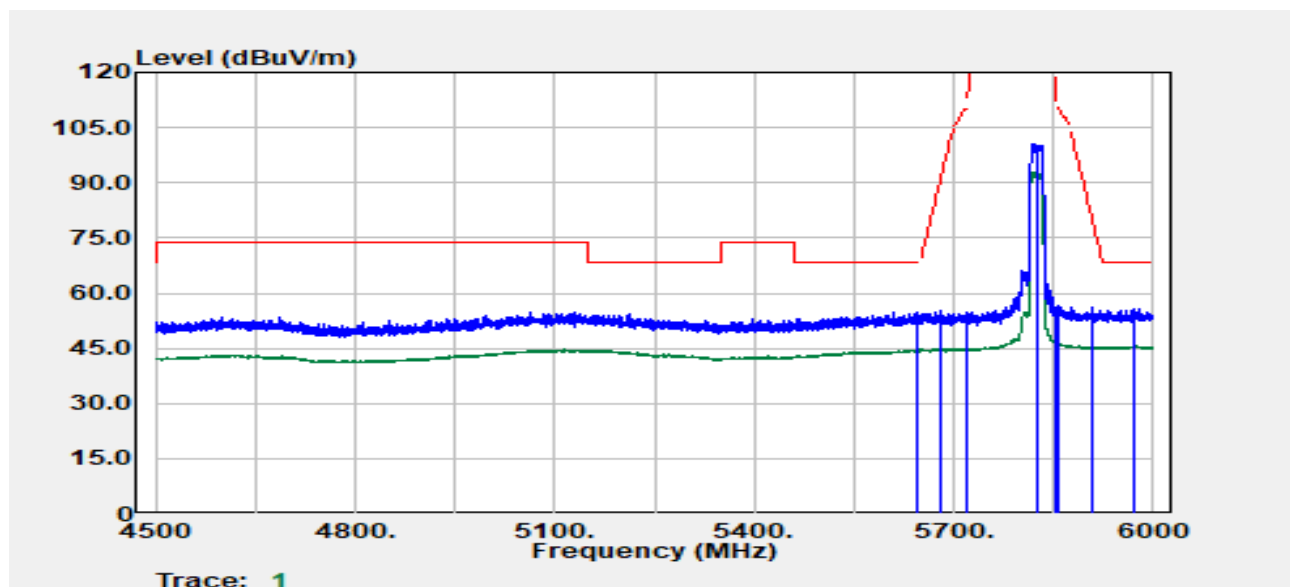


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5643.600	Peak	41.57	13.22	54.80	68.20	-13.40
5680.200	Peak	41.67	13.45	55.12	90.59	-35.47
5719.500	Peak	40.85	13.66	54.51	110.66	-56.15
5721.000	Peak	40.20	13.67	53.87	113.08	-59.21
5825.000	Peak	86.63	14.09	100.72	--	--
5825.000	Average	78.85	14.09	92.94	--	--
5853.000	Peak	41.87	14.02	55.89	115.36	-59.47
5856.300	Peak	42.78	14.02	56.80	110.44	-53.63
5910.000	Peak	42.07	14.06	56.13	79.27	-23.14
5971.800	Peak	41.70	14.16	55.85	68.20	-12.35

Report No.: TMWK2308002691KR

Page 150 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

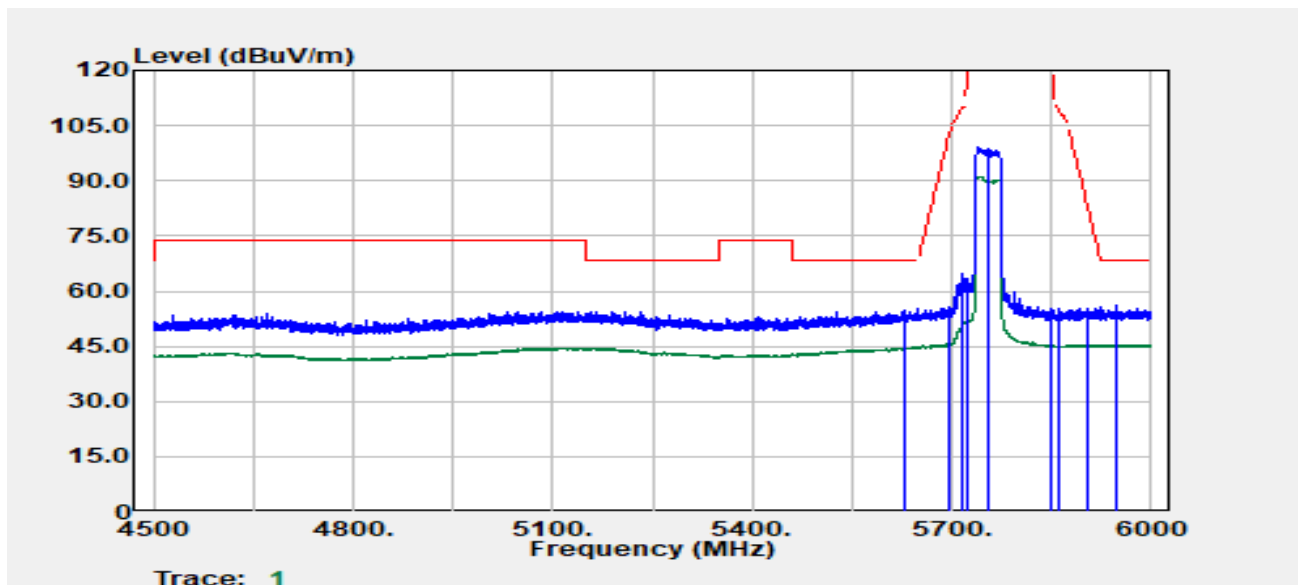


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5629.200	Peak	41.73	13.09	54.82	68.20	-13.38
5696.100	Peak	42.07	13.54	55.60	102.33	-46.72
5717.400	Peak	50.95	13.65	64.60	110.07	-45.47
5722.800	Peak	49.92	13.68	63.60	117.19	-53.58
5755.000	Peak	85.29	13.85	99.14	--	--
5755.000	Average	77.39	13.85	91.24	--	--
5850.900	Peak	40.10	14.02	54.12	120.15	-66.03
5862.300	Peak	41.43	14.02	55.45	108.75	-53.30
5906.100	Peak	41.42	14.05	55.47	82.15	-26.68
5946.600	Peak	41.82	14.15	55.97	68.20	-12.23

Report No.: TMWK2308002691KR

Page 151 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

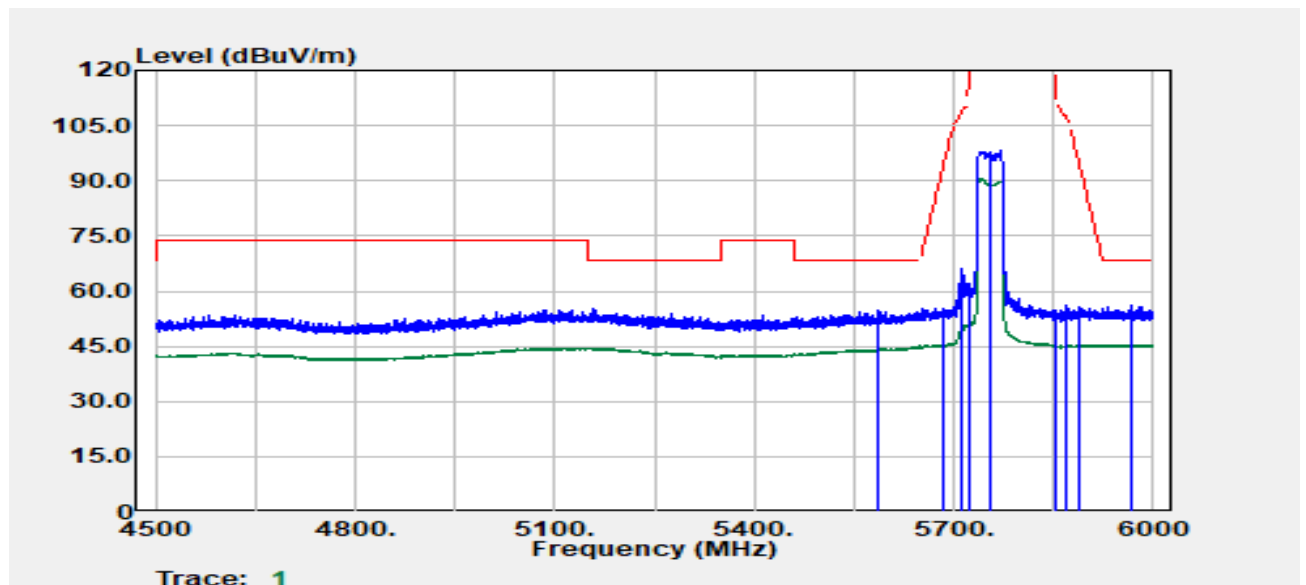

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5587.200	Peak	41.80	12.85	54.65	68.20	-13.55
5684.100	Peak	41.73	13.47	55.20	93.47	-38.27
5709.900	Peak	52.44	13.61	66.05	107.97	-41.93
5721.900	Peak	48.31	13.67	61.99	115.13	-53.15
5755.000	Peak	84.56	13.85	98.42	--	--
5755.000	Average	76.66	13.85	90.51	--	--
5853.300	Peak	40.49	14.02	54.51	114.67	-60.16
5868.300	Peak	42.12	14.02	56.14	107.07	-50.93
5889.600	Peak	41.46	14.03	55.49	94.36	-38.87
5965.800	Peak	42.00	14.16	56.16	68.20	-12.04

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

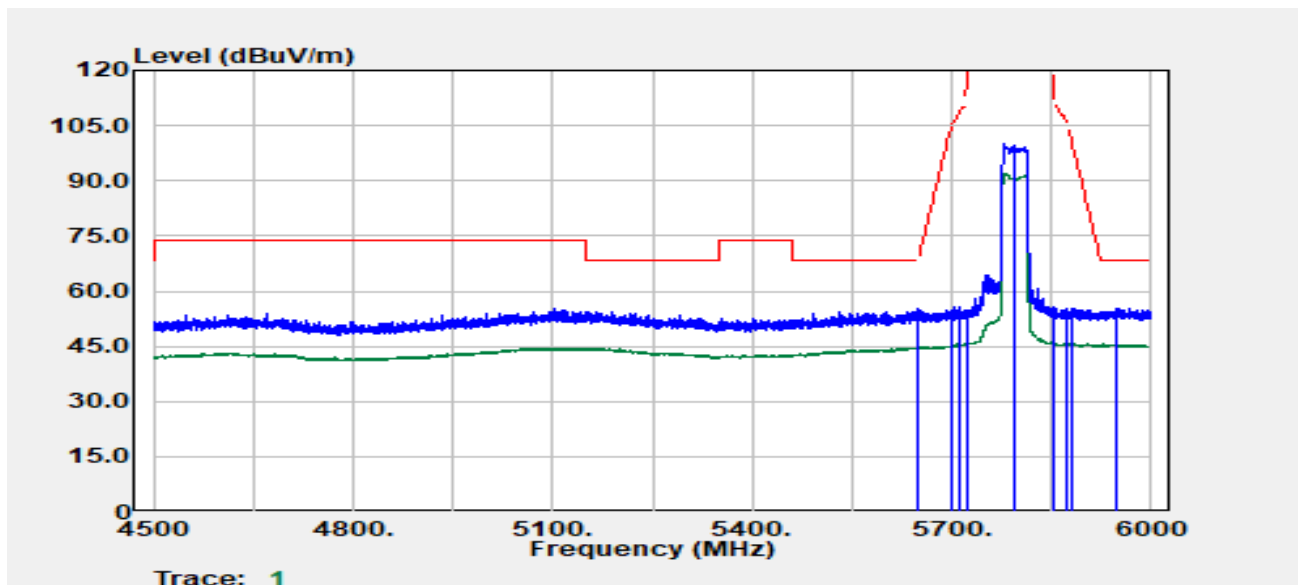

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5647.800	Peak	41.99	13.26	55.25	68.20	-12.95
5700.000	Peak	41.44	13.56	55.00	105.20	-50.20
5713.500	Peak	42.16	13.63	55.79	108.98	-53.19
5721.900	Peak	41.01	13.67	54.68	115.13	-60.45
5795.000	Peak	85.73	14.13	99.85	--	--
5795.000	Average	77.62	14.13	91.75	--	--
5852.100	Peak	41.13	14.02	55.15	117.41	-62.26
5871.300	Peak	41.33	14.02	55.35	106.23	-50.88
5879.100	Peak	41.36	14.03	55.39	102.15	-46.76
5947.200	Peak	41.19	14.15	55.35	68.20	-12.85

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

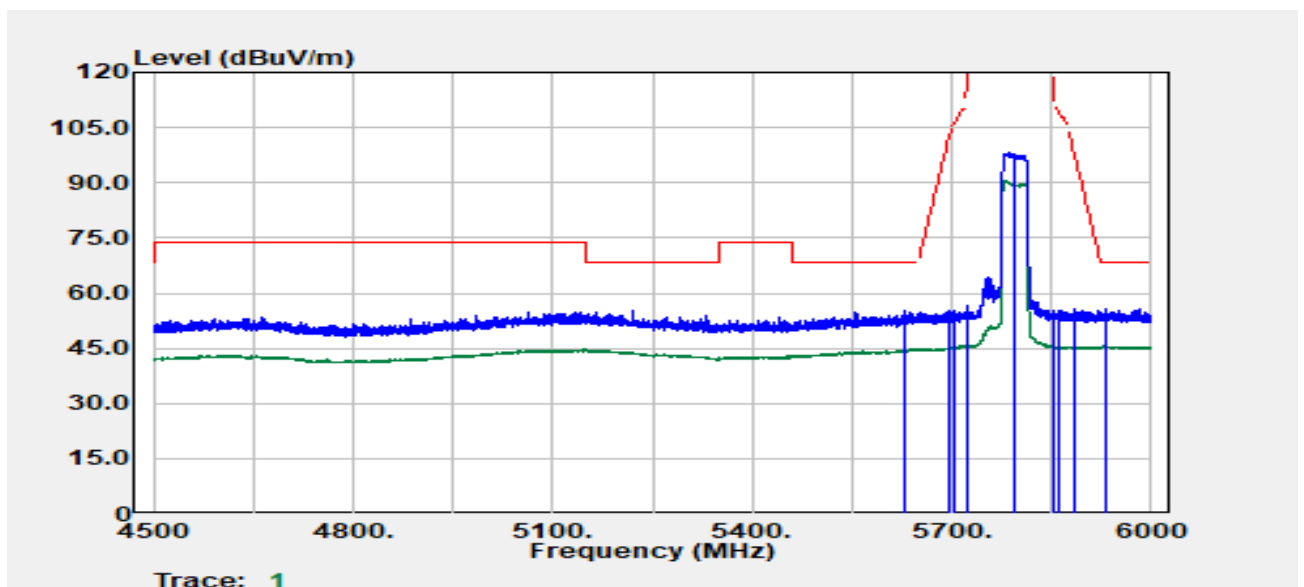

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5629.800	Peak	42.08	13.10	55.18	68.20	-13.02
5697.900	Peak	41.63	13.55	55.18	103.65	-48.47
5703.000	Peak	41.66	13.58	55.23	106.04	-50.81
5724.000	Peak	43.03	13.68	56.71	119.92	-63.21
5795.000	Peak	84.32	14.13	98.45	--	--
5795.000	Average	76.35	14.13	90.48	--	--
5853.300	Peak	41.03	14.02	55.05	114.67	-59.62
5862.600	Peak	41.26	14.02	55.28	108.67	-53.39
5886.300	Peak	41.59	14.03	55.62	96.81	-41.19
5931.900	Peak	41.71	14.11	55.82	68.20	-12.38

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

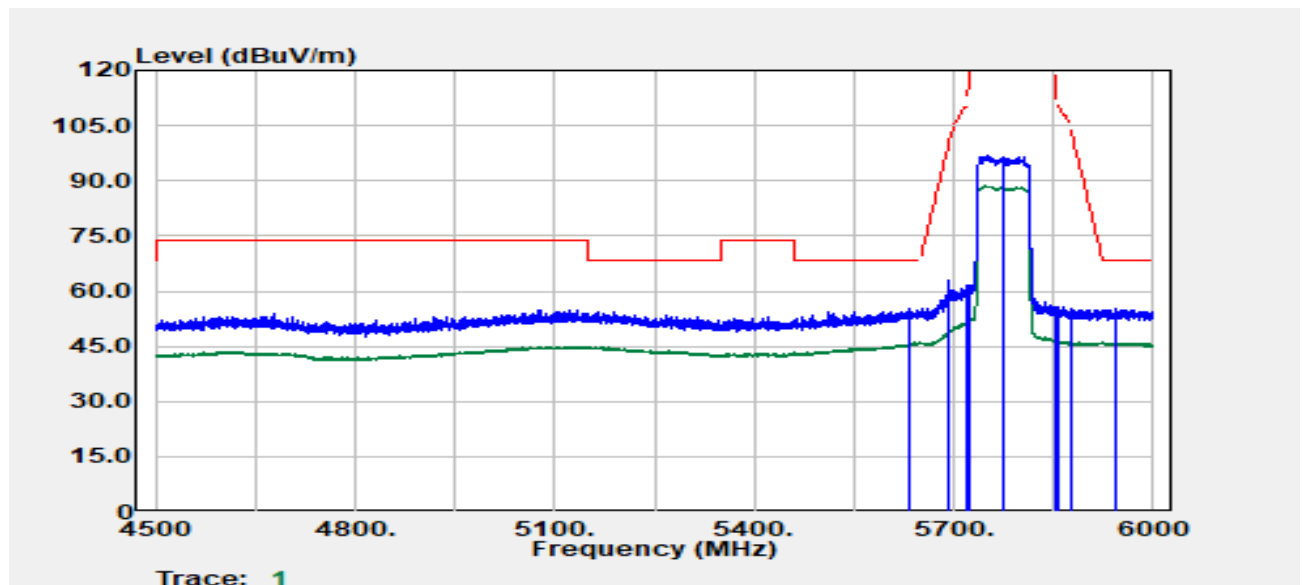

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5634.300	Peak	42.25	13.14	55.39	68.20	-12.81
5692.200	Peak	49.54	13.52	63.05	99.45	-36.40
5719.200	Peak	48.04	13.66	61.70	110.58	-48.88
5724.900	Peak	47.70	13.69	61.39	121.97	-60.58
5775.000	Peak	82.69	13.99	96.68	--	--
5775.000	Average	74.57	13.99	88.56	--	--
5852.700	Peak	41.65	14.02	55.67	116.04	-60.37
5858.400	Peak	41.77	14.02	55.79	109.85	-54.06
5877.000	Peak	41.18	14.03	55.21	103.71	-48.50
5943.600	Peak	41.09	14.14	55.23	68.20	-12.97

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

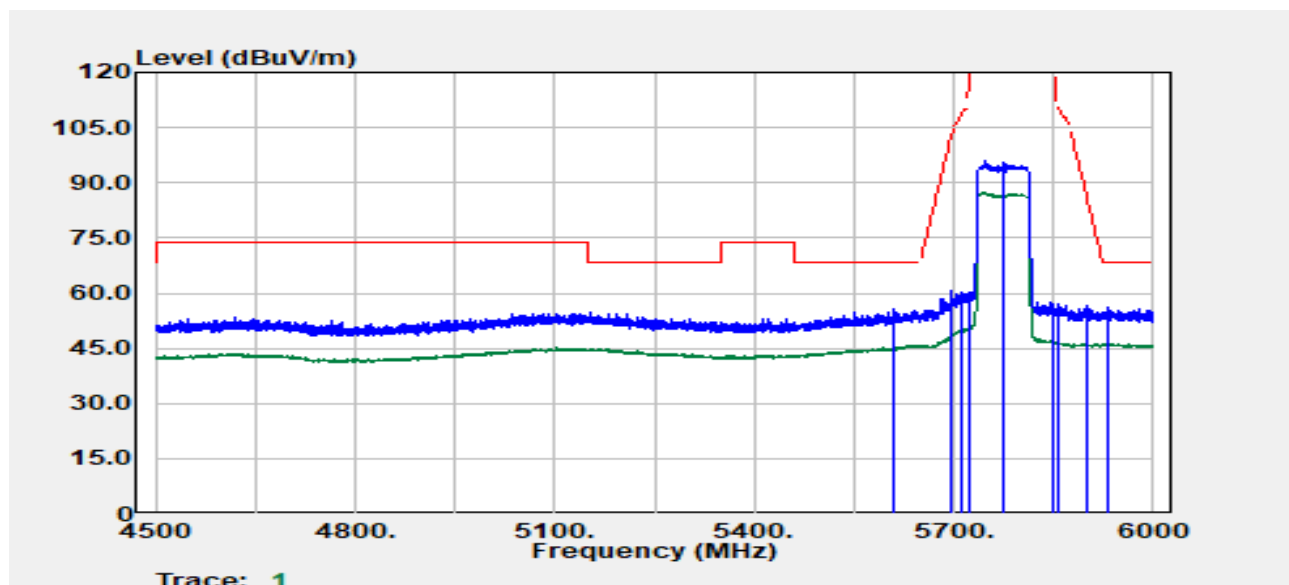

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5611.200	Peak	42.75	12.93	55.68	68.20	-12.52
5696.700	Peak	47.35	13.54	60.89	102.77	-41.88
5710.800	Peak	46.49	13.62	60.10	108.23	-48.12
5724.300	Peak	46.47	13.69	60.16	120.60	-60.44
5775.000	Peak	81.79	13.99	95.78	--	--
5775.000	Average	73.57	13.99	87.56	--	--
5850.900	Peak	42.05	14.02	56.07	120.15	-64.08
5855.700	Peak	42.85	14.02	56.87	110.60	-53.73
5900.400	Peak	42.55	14.03	56.58	86.36	-29.79
5932.800	Peak	41.84	14.12	55.95	68.20	-12.25

Band Edge Test Data: (IC)

Project Number	:TM-2308000057P	Test Date	:2023-08-31
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/57
Frequency	:5180 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony.Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

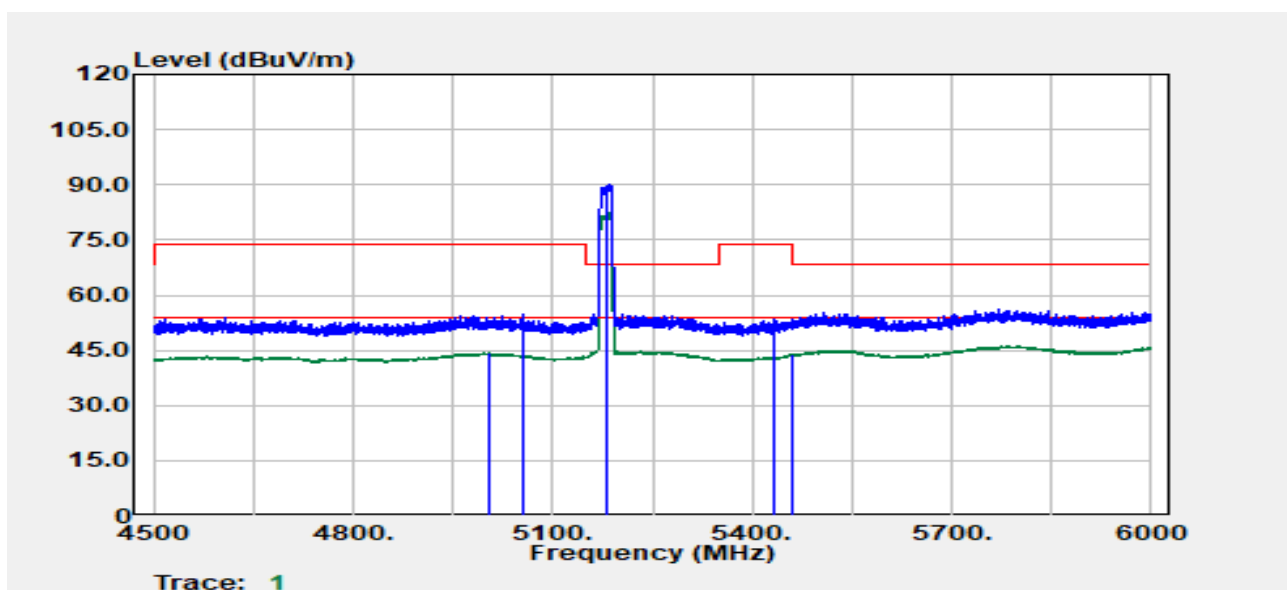


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5005.334	Average	32.58	11.65	44.23	54.00	-9.77
5057.093	Peak	42.72	11.96	54.69	74.00	-19.31
5180.000	Peak	78.00	12.10	90.10	--	--
5180.000	Average	70.11	12.10	82.21	--	--
5431.155	Peak	40.90	12.35	53.25	74.00	-20.75
5459.660	Average	31.45	12.41	43.86	54.00	-10.14

Report No.: TMWK2308002691KR

Page 157 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5180 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

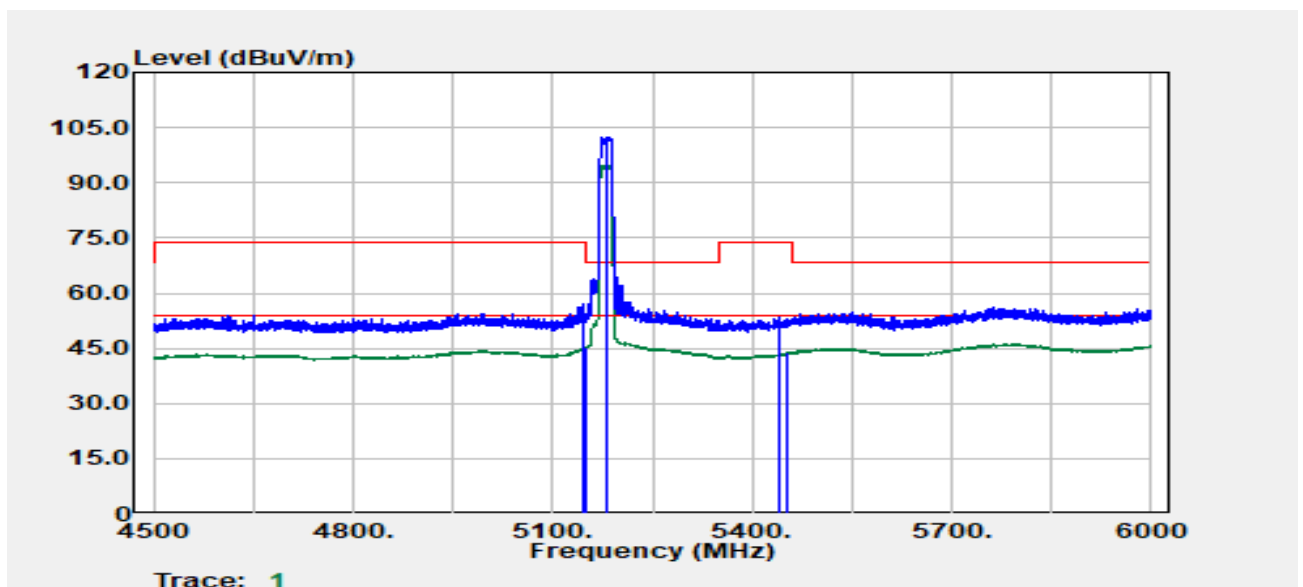

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5145.600	Peak	44.90	12.15	57.05	74.00	-16.95
5149.200	Average	33.06	12.16	45.22	54.00	-8.78
5180.000	Peak	90.13	12.10	102.23	--	--
5180.000	Average	82.72	12.10	94.82	--	--
5440.800	Peak	40.97	12.36	53.33	74.00	-20.67
5454.000	Average	31.44	12.39	43.83	54.00	-10.17

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

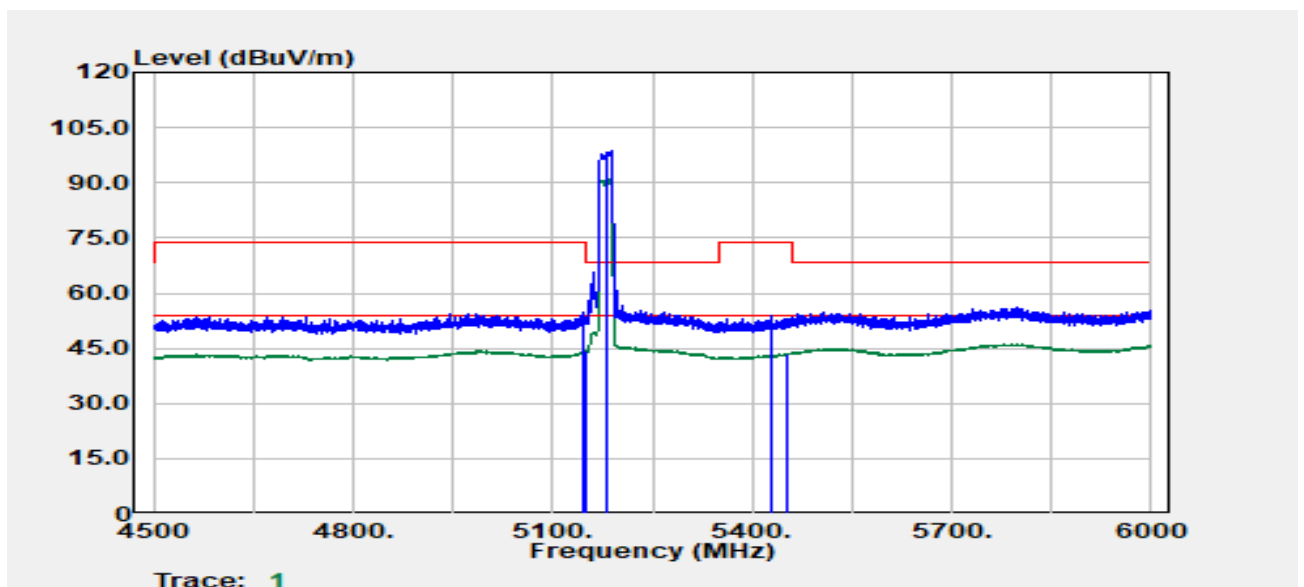


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5145.600	Peak	42.86	12.15	55.01	74.00	-18.99
5149.800	Average	32.07	12.16	44.23	54.00	-9.77
5180.000	Peak	86.60	12.10	98.70	--	--
5180.000	Average	78.78	12.10	90.88	--	--
5430.000	Peak	41.35	12.35	53.70	74.00	-20.30
5454.000	Average	31.24	12.39	43.63	54.00	-10.37

Report No.: TMWK2308002691KR

Page 159 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

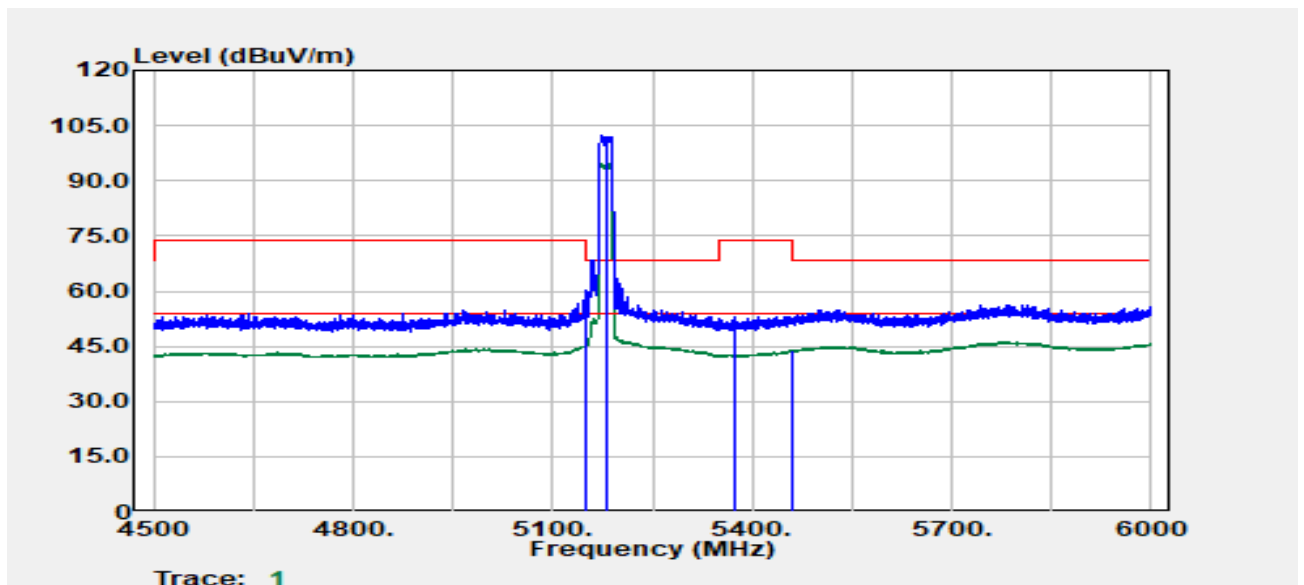

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5148.600	Peak	47.96	12.16	60.12	74.00	-13.88
5149.800	Average	32.97	12.16	45.13	54.00	-8.87
5180.000	Peak	90.30	12.10	102.40	--	--
5180.000	Average	82.47	12.10	94.57	--	--
5372.100	Peak	40.99	12.21	53.20	74.00	-20.80
5459.400	Average	31.41	12.41	43.82	54.00	-10.18

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

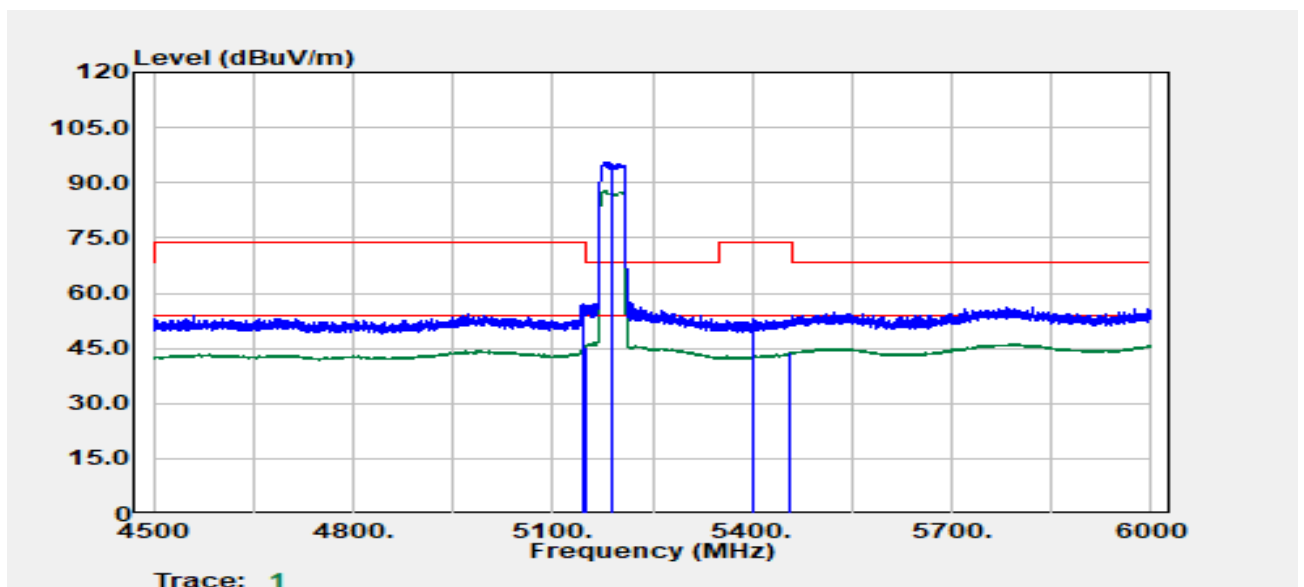

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5146.500	Peak	44.92	12.15	57.07	74.00	-16.93
5149.800	Average	33.13	12.16	45.29	54.00	-8.71
5190.000	Peak	83.60	12.08	95.68	--	--
5190.000	Average	75.56	12.08	87.64	--	--
5400.600	Peak	40.72	12.32	53.04	74.00	-20.96
5457.300	Average	31.44	12.40	43.84	54.00	-10.16

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

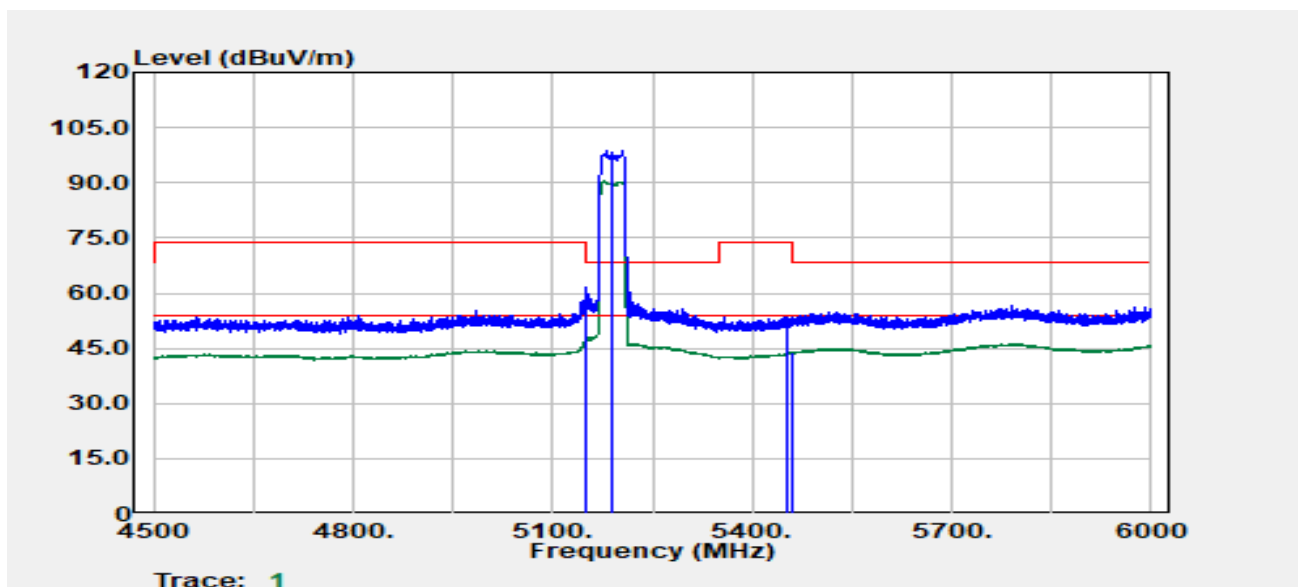

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5148.300	Peak	49.43	12.16	61.58	74.00	-12.42
5149.500	Average	34.85	12.16	47.00	54.00	-7.00
5190.000	Peak	86.75	12.08	98.83	--	--
5190.000	Average	78.35	12.08	90.43	--	--
5452.500	Peak	40.96	12.38	53.34	74.00	-20.66
5459.700	Average	31.51	12.41	43.91	54.00	-10.09

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

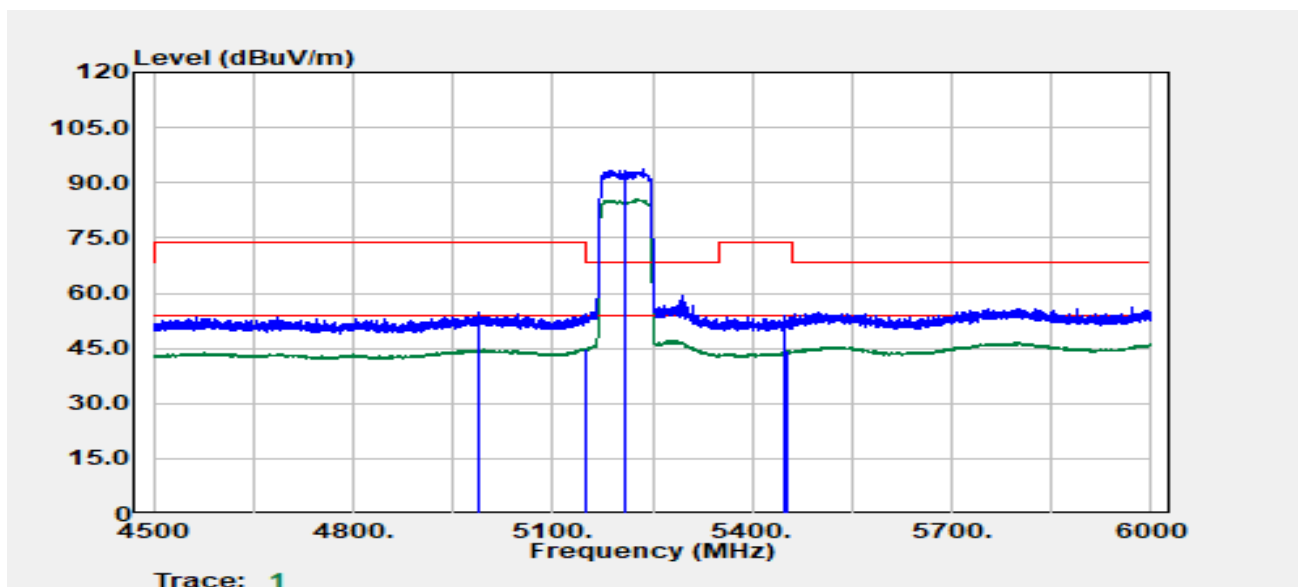

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4989.900	Peak	43.07	11.52	54.59	74.00	-19.41
5148.900	Average	32.87	12.16	45.03	54.00	-8.97
5210.000	Peak	81.75	12.06	93.80	--	--
5210.000	Average	73.38	12.06	85.44	--	--
5449.200	Peak	41.44	12.37	53.82	74.00	-20.18
5453.400	Average	31.96	12.39	44.35	54.00	-9.65

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

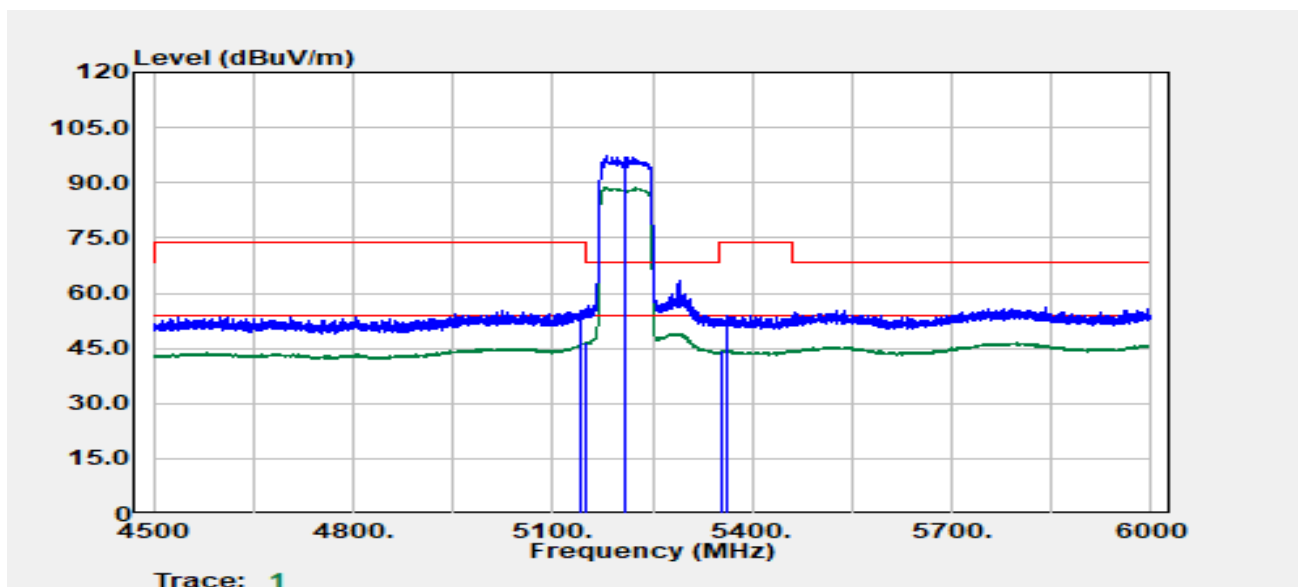

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5140.200	Peak	43.32	12.14	55.45	74.00	-18.55
5148.300	Average	34.36	12.16	46.51	54.00	-7.49
5210.000	Peak	85.13	12.06	97.18	--	--
5210.000	Average	76.63	12.06	88.69	--	--
5352.300	Average	32.24	12.14	44.38	54.00	-9.62
5361.300	Peak	41.71	12.17	53.88	74.00	-20.12

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5320 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

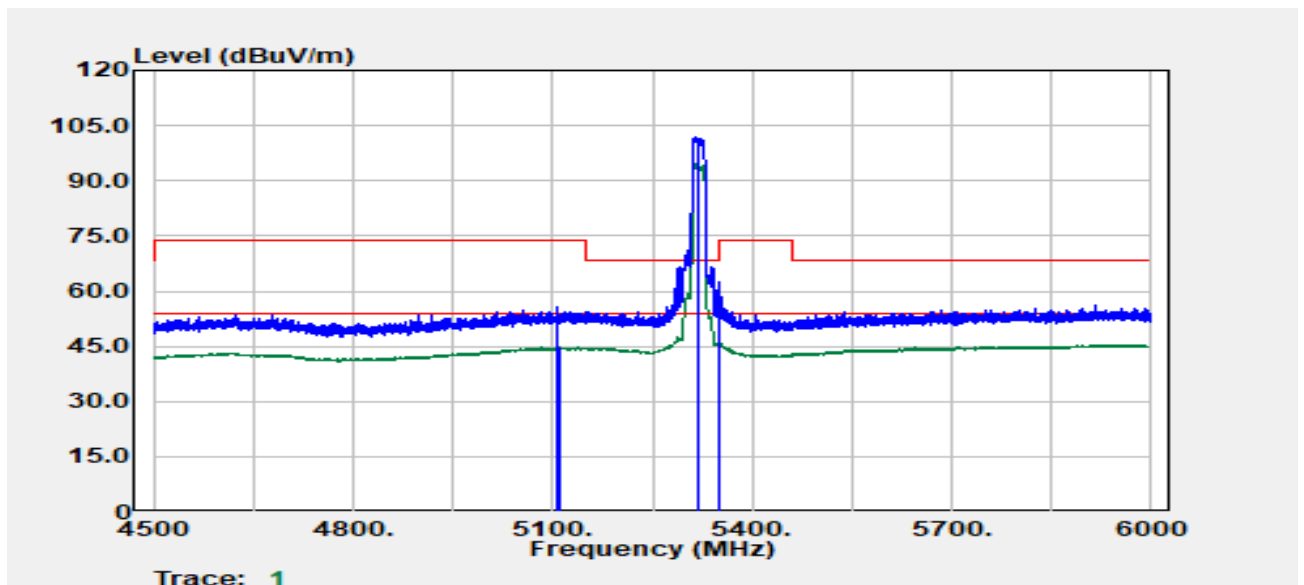


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5107.851	Peak	43.53	12.07	55.59	74.00	-18.41
5110.352	Average	32.69	12.07	44.76	54.00	-9.24
5320.000	Peak	89.76	12.14	101.90	--	--
5320.000	Average	82.60	12.14	94.74	--	--
5350.392	Average	33.50	12.13	45.63	54.00	-8.37
5351.892	Peak	50.37	12.14	62.50	74.00	-11.50

Report No.: TMWK2308002691KR

Page 165 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5320 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

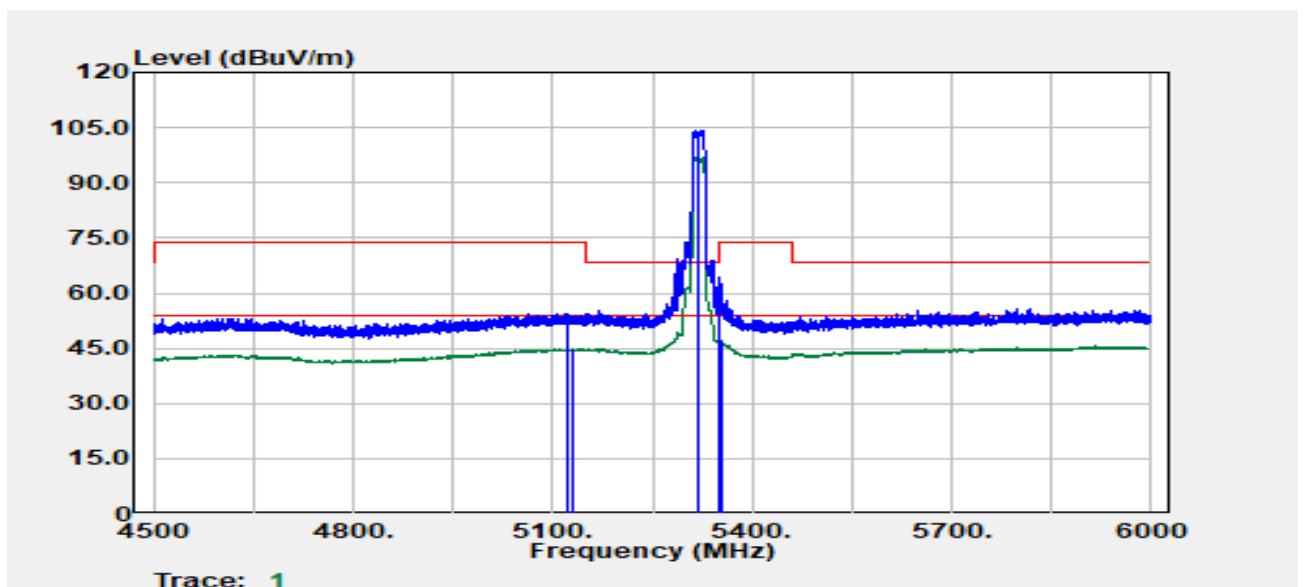

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5120.604	Peak	42.39	12.10	54.49	74.00	-19.51
5130.355	Average	32.63	12.12	44.75	54.00	-9.25
5320.000	Peak	92.06	12.14	104.20	--	--
5320.000	Average	84.77	12.14	96.91	--	--
5350.642	Peak	52.39	12.13	64.52	74.00	-9.48
5352.642	Average	34.94	12.14	47.08	54.00	-6.92

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

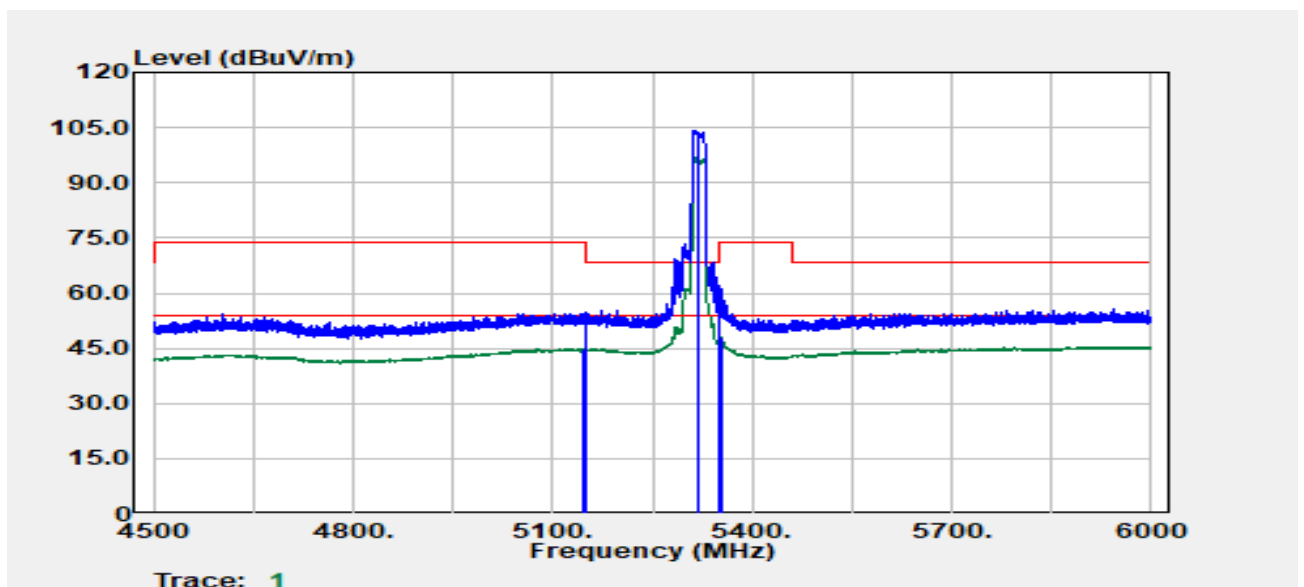


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5147.608	Average	32.61	12.15	44.77	54.00	-9.23
5150.108	Peak	42.68	12.16	54.84	68.20	-13.36
5320.000	Peak	92.12	12.14	104.26	--	--
5320.000	Average	84.87	12.14	97.01	--	--
5351.142	Peak	49.96	12.13	62.10	74.00	-11.90
5352.892	Average	35.68	12.14	47.82	54.00	-6.18

Report No.: TMWK2308002691KR

Page 167 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

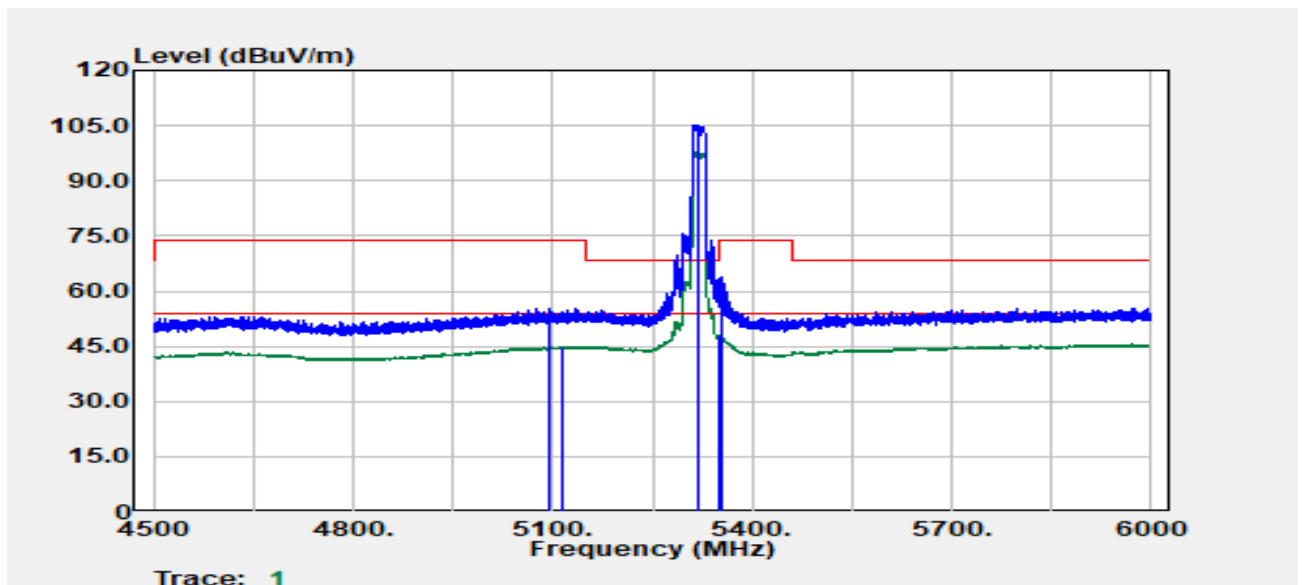

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5094.849	Peak	43.32	12.04	55.36	74.00	-18.64
5115.853	Average	32.67	12.08	44.76	54.00	-9.24
5320.000	Peak	92.82	12.14	104.96	--	--
5320.000	Average	85.69	12.14	97.83	--	--
5351.142	Average	35.75	12.13	47.88	54.00	-6.12
5353.142	Peak	51.61	12.14	63.75	74.00	-10.25

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5310 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

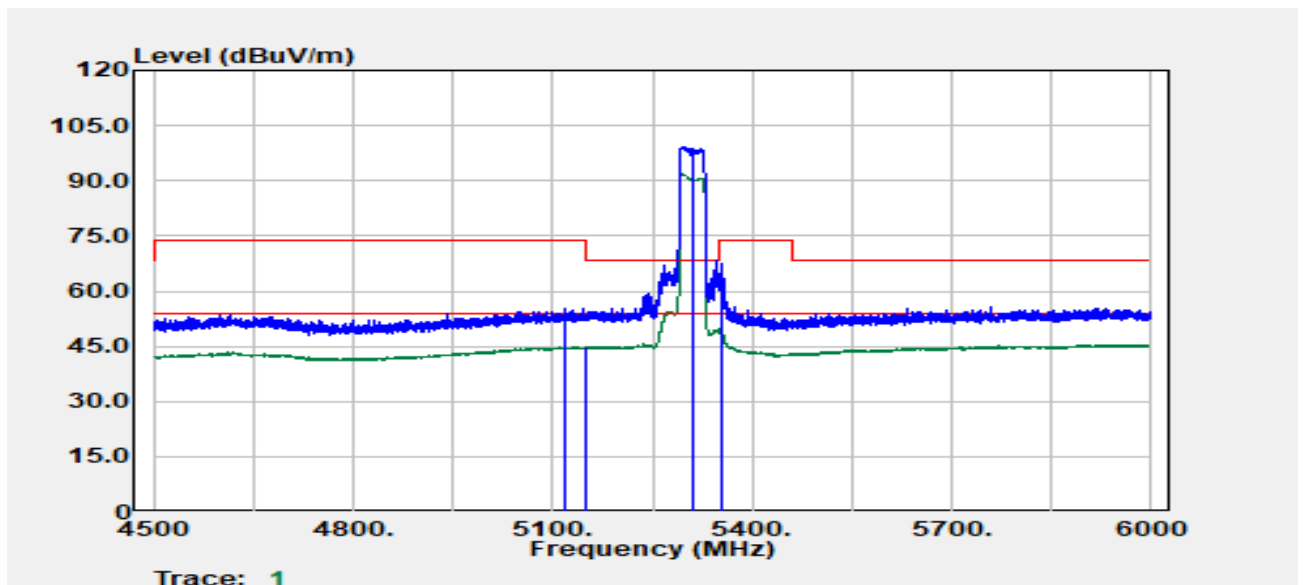

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5116.800	Peak	43.04	12.09	55.12	74.00	-18.88
5149.800	Average	32.68	12.16	44.84	54.00	-9.16
5310.000	Peak	87.11	12.15	99.26	--	--
5310.000	Average	79.64	12.15	91.78	--	--
5354.700	Average	37.90	12.15	50.05	54.00	-3.95
5355.600	Peak	55.43	12.15	67.58	74.00	-6.42

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5310 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

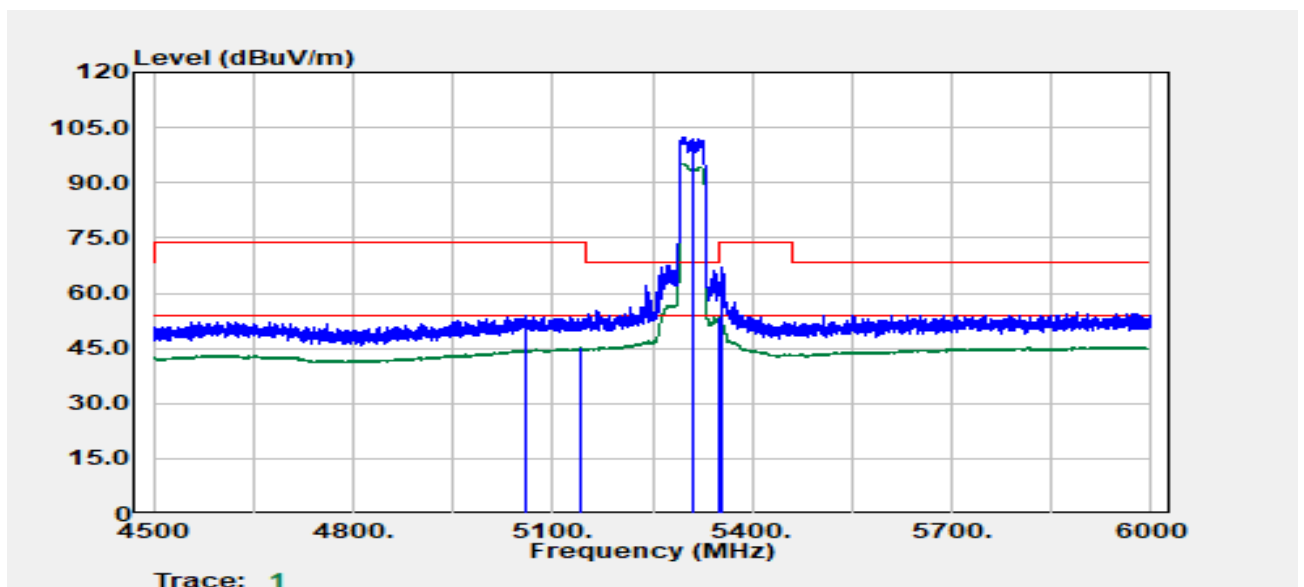

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5058.843	Peak	41.82	11.97	53.79	74.00	-20.21
5142.857	Average	32.92	12.14	45.06	54.00	-8.94
5310.000	Peak	90.31	12.15	102.46	--	--
5310.000	Average	82.99	12.15	95.14	--	--
5351.642	Average	41.26	12.14	53.40	54.00	-0.60
5353.142	Peak	54.82	12.14	66.96	74.00	-7.04

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :55


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

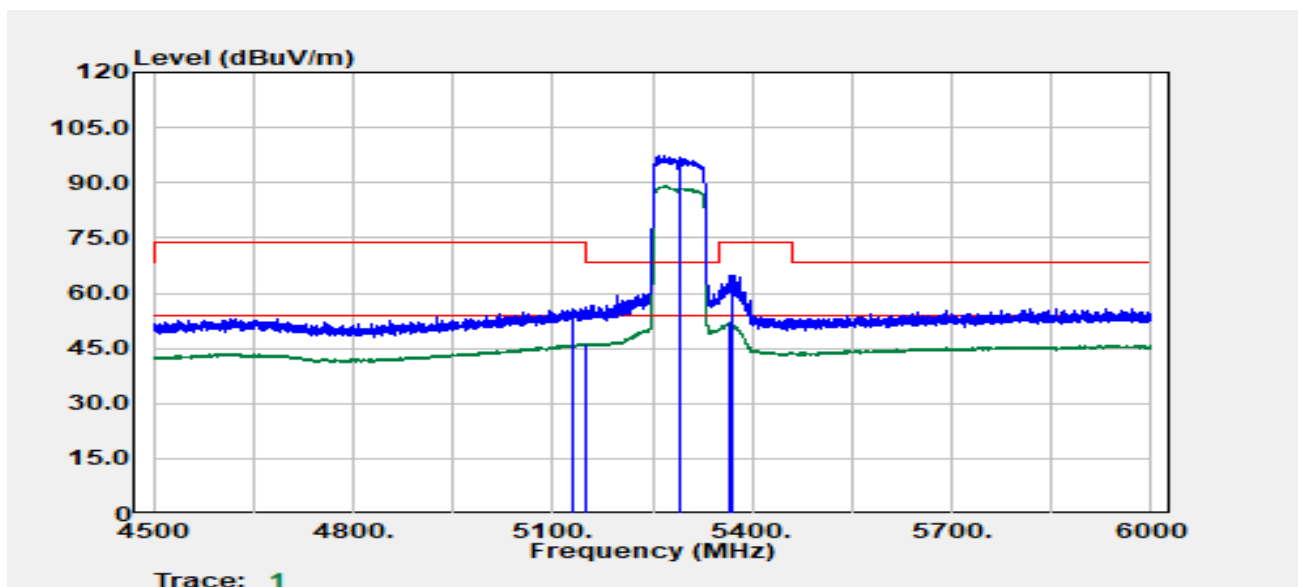

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5130.000	Peak	43.55	12.12	55.67	74.00	-18.33
5148.600	Average	34.07	12.16	46.23	54.00	-7.77
5290.000	Peak	85.40	12.13	97.52	--	--
5290.000	Average	76.97	12.13	89.10	--	--
5364.000	Average	39.81	12.18	51.99	54.00	-2.01
5368.800	Peak	52.72	12.20	64.92	74.00	-9.08

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :55


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

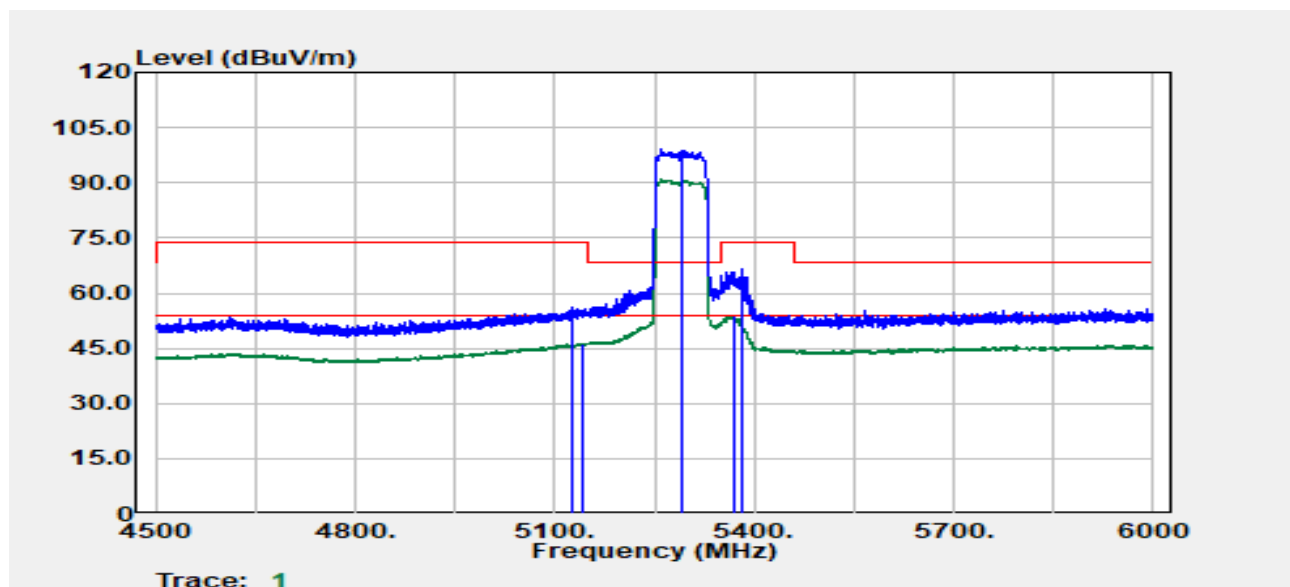

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5125.500	Peak	44.16	12.11	56.27	74.00	-17.73
5142.600	Average	34.18	12.14	46.32	54.00	-7.68
5290.000	Peak	86.93	12.13	99.06	--	--
5290.000	Average	78.75	12.13	90.88	--	--
5367.900	Average	41.61	12.20	53.81	54.00	-0.19
5380.200	Peak	54.19	12.24	66.43	74.00	-7.57

Report No.: TMWK2308002691KR

Project Number	:TM-2308000057P	Test Date	:2023-09-01
Operation Band	:802.11ac80/Band2_BT EDR	Temp./Humi.	:24.6/58
Frequency	:2480 MHz_5290 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony.Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

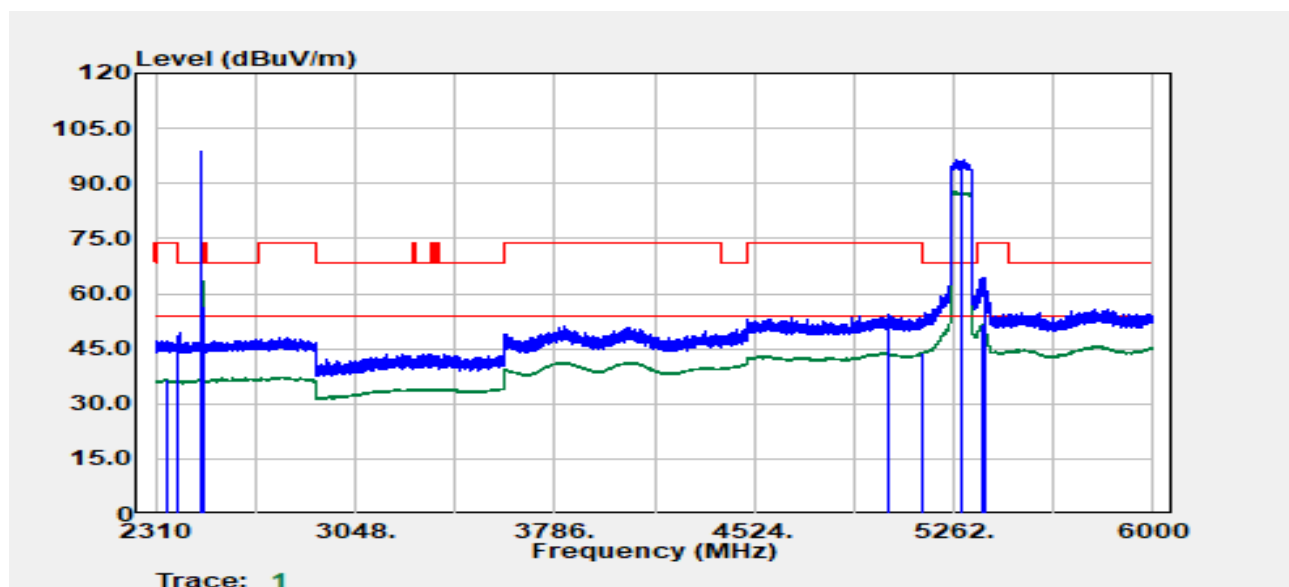


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2347.766	Average	31.60	4.94	36.54	54.00	-17.46
2389.534	Peak	42.76	4.97	47.73	74.00	-26.27
2480.000	Peak	93.41	5.26	98.67	--	--
2480.000	Average	90.32	5.26	95.58	--	--
2483.573	Average	35.90	5.26	41.16	54.00	-12.84
2483.824	Peak	43.34	5.26	48.61	74.00	-25.39
5022.837	Peak	42.42	11.77	54.18	74.00	-19.82
5150.108	Average	31.87	12.16	44.03	54.00	-9.97
5290.000	Peak	84.26	12.13	96.39	--	--
5290.000	Average	75.78	12.13	87.91	--	--
5365.895	Average	39.29	12.19	51.48	54.00	-2.52
5382.147	Peak	52.12	12.25	64.37	74.00	-9.63

Report No.: TMWK2308002691KR

Page 173 / 391
Rev.: 00


Project Number	:TM-2308000057P	Test Date	:2023-09-01
Operation Band	:802.11ac80/Band2_BT EDR	Temp./Humi.	:24.6/58
Frequency	:2480 MHz_5290 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Tony.Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

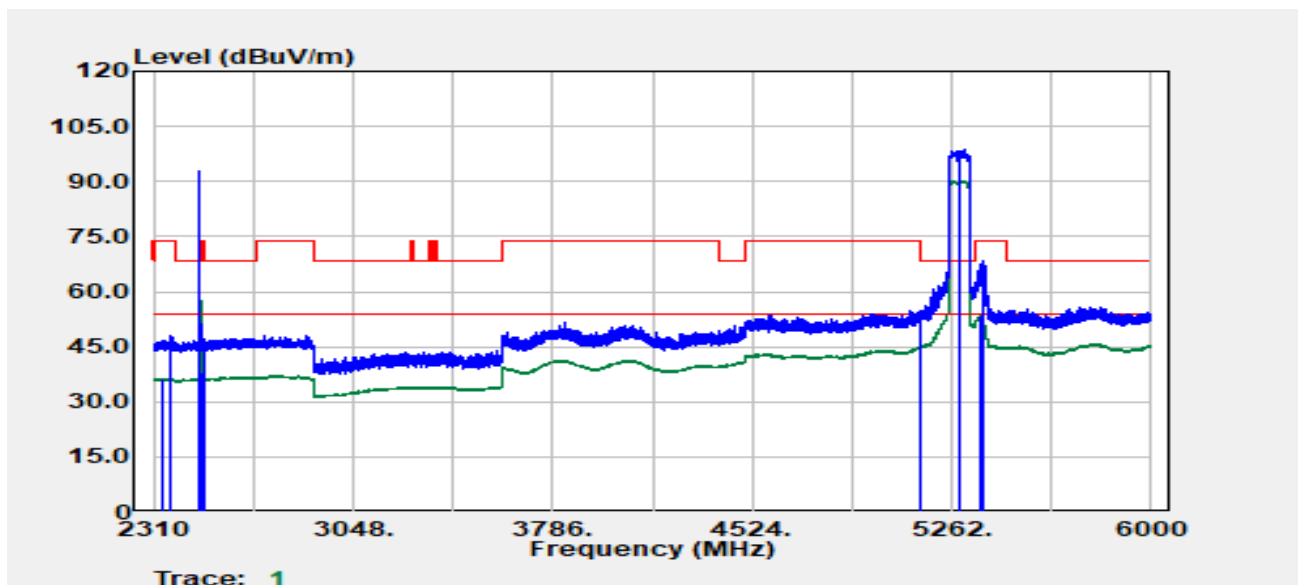

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2340.513	Average	31.53	4.86	36.39	54.00	-17.61
2373.777	Peak	43.17	4.81	47.98	74.00	-26.02
2480.000	Peak	87.65	5.26	92.91	--	--
2480.000	Average	84.57	5.26	89.83	--	--
2483.573	Average	32.64	5.26	37.90	54.00	-16.10
2493.578	Peak	41.78	5.27	47.06	74.00	-26.94
5144.607	Peak	42.86	12.15	55.01	74.00	-18.99
5145.857	Average	33.02	12.15	45.17	54.00	-8.83
5290.000	Peak	86.68	12.13	98.81	--	--
5290.000	Average	78.16	12.13	90.29	--	--
5368.145	Average	41.38	12.20	53.58	54.00	-0.42
5375.646	Peak	55.92	12.23	68.15	74.00	-5.85

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

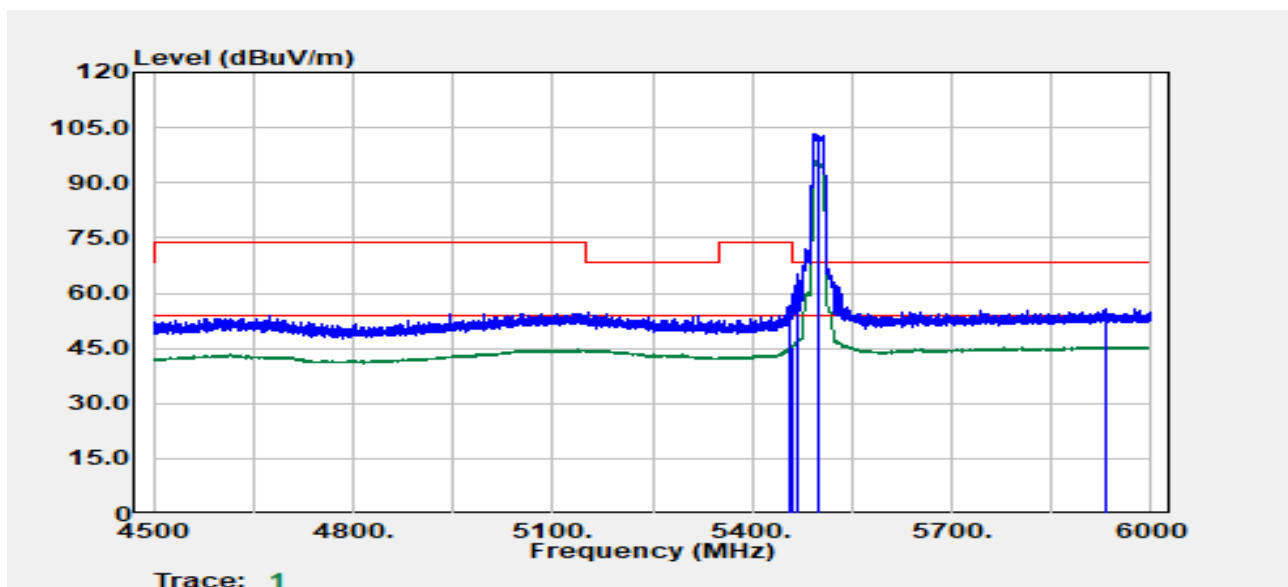

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5457.910	Peak	44.09	12.40	56.49	74.00	-17.51
5459.910	Average	32.89	12.41	45.30	54.00	-8.70
5466.911	Peak	52.87	12.43	65.30	68.20	-2.90
5500.000	Peak	90.85	12.55	103.40	--	--
5500.000	Average	83.45	12.55	96.00	--	--
5930.738	Peak	41.67	14.11	55.78	68.20	-12.42

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

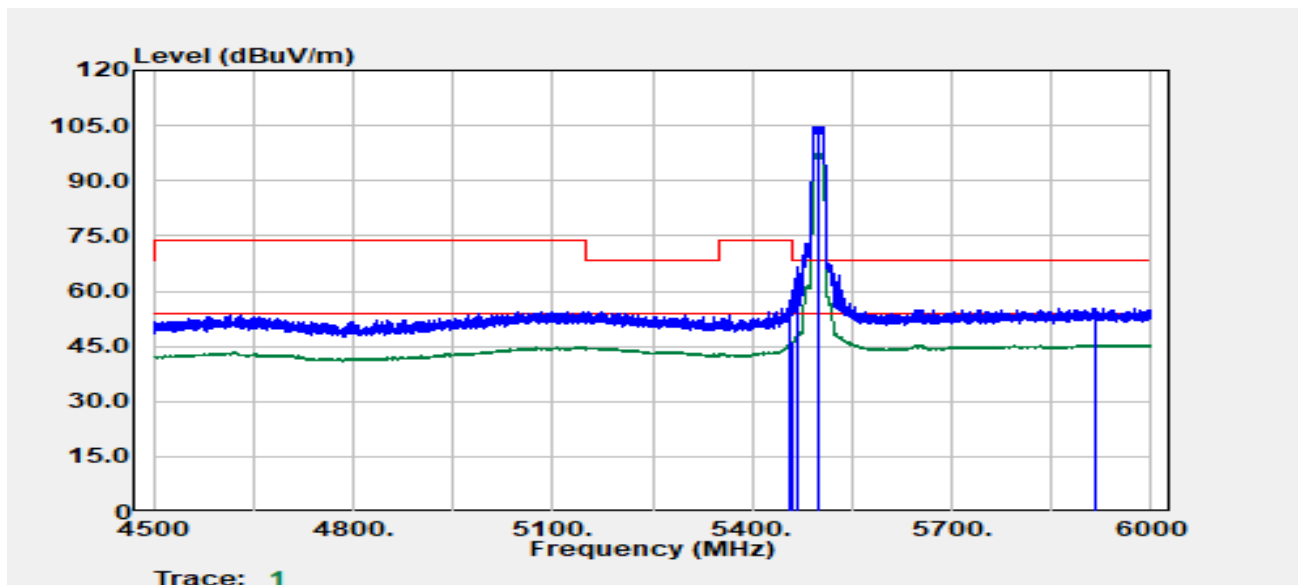

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5454.409	Peak	44.90	12.39	57.29	74.00	-16.71
5459.410	Average	33.63	12.41	46.04	54.00	-7.96
5467.411	Peak	54.05	12.44	66.49	68.20	-1.71
5500.000	Peak	92.18	12.55	104.73	--	--
5500.000	Average	84.85	12.55	97.40	--	--
5916.236	Peak	41.27	14.07	55.34	68.20	-12.86

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

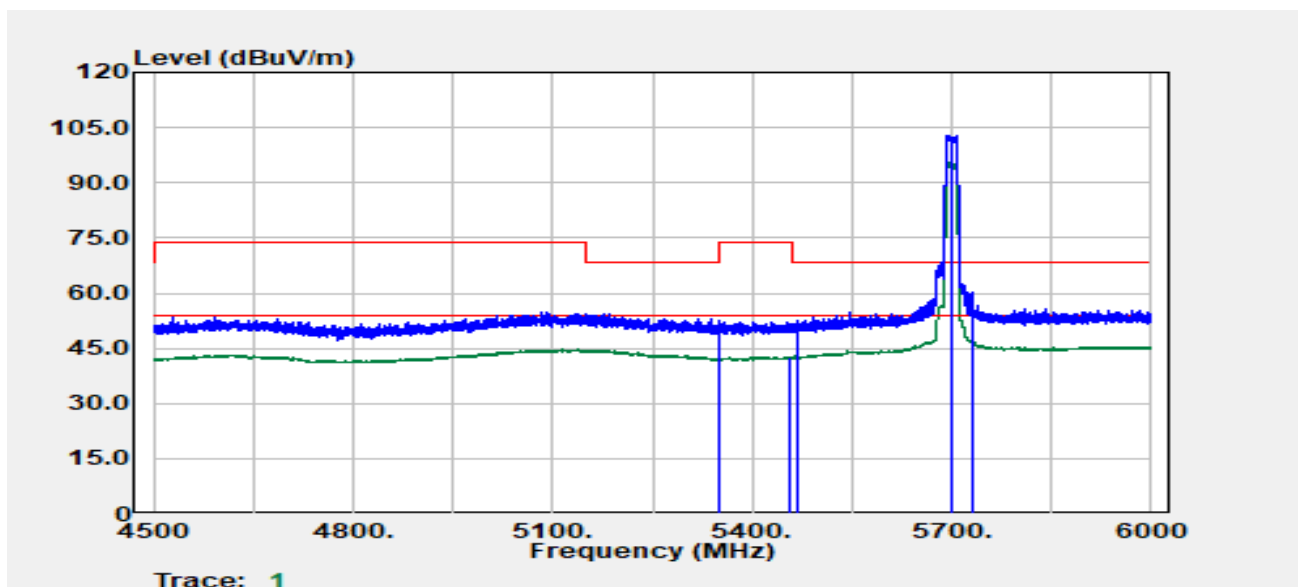

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5351.892	Peak	40.21	12.14	52.35	74.00	-21.65
5456.409	Average	30.19	12.40	42.59	54.00	-11.41
5467.411	Peak	40.21	12.44	52.64	68.20	-15.56
5700.000	Peak	89.33	13.56	102.89	--	--
5700.000	Average	81.92	13.56	95.48	--	--
5731.205	Peak	46.46	13.72	60.18	68.20	-8.02

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

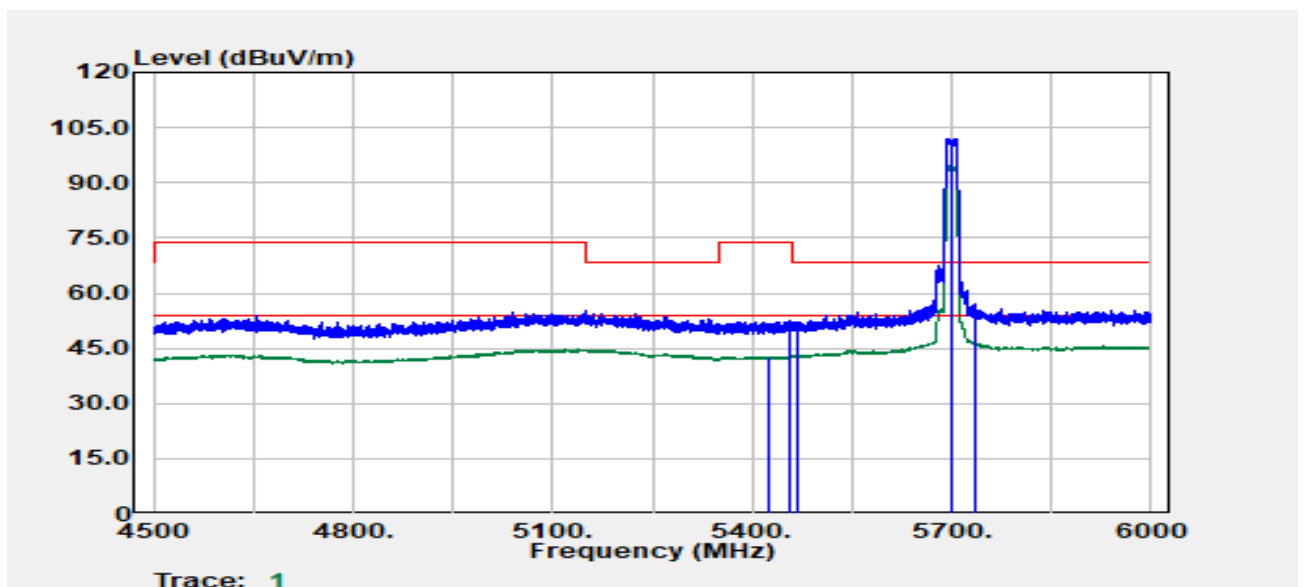


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5423.654	Average	30.36	12.35	42.71	54.00	-11.29
5457.160	Peak	40.11	12.40	52.51	74.00	-21.49
5466.911	Peak	39.72	12.43	52.16	68.20	-16.04
5700.000	Peak	88.52	13.56	102.08	--	--
5700.000	Average	80.96	13.56	94.52	--	--
5737.206	Peak	43.45	13.75	57.21	68.20	-10.99

Report No.: TMWK2308002691KR

Page 178 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

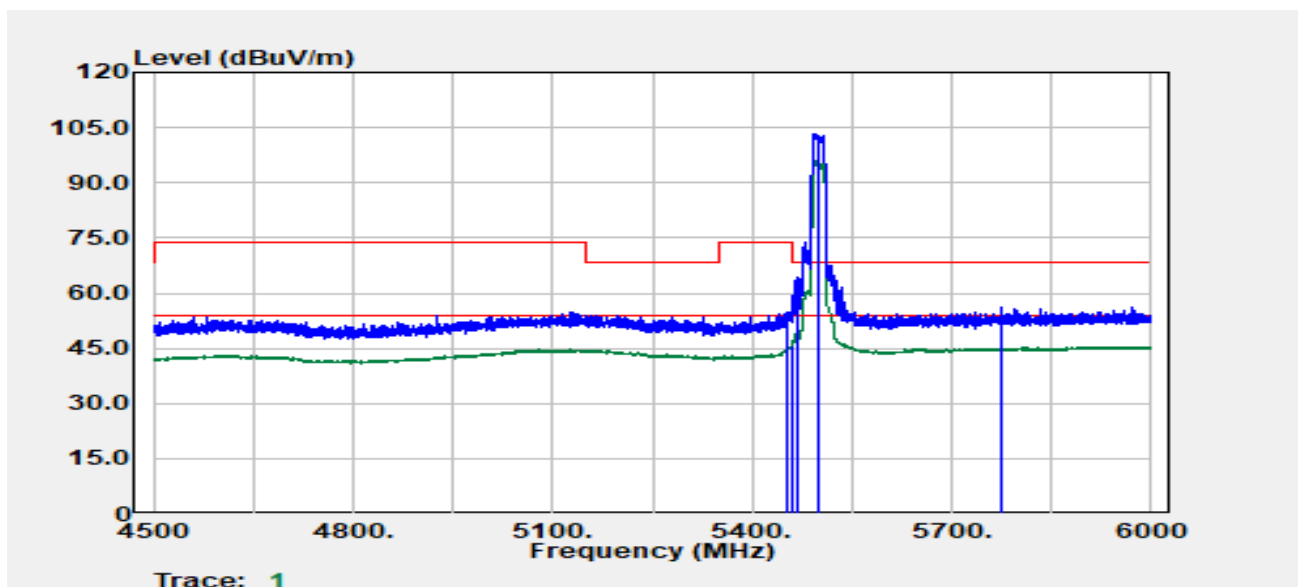

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5454.159	Peak	42.39	12.39	54.78	74.00	-19.22
5459.910	Average	33.43	12.41	45.84	54.00	-8.16
5469.912	Peak	51.87	12.44	64.32	68.20	-3.88
5500.000	Peak	90.86	12.55	103.41	--	--
5500.000	Average	83.43	12.55	95.98	--	--
5774.962	Peak	42.15	13.99	56.14	68.20	-12.06

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

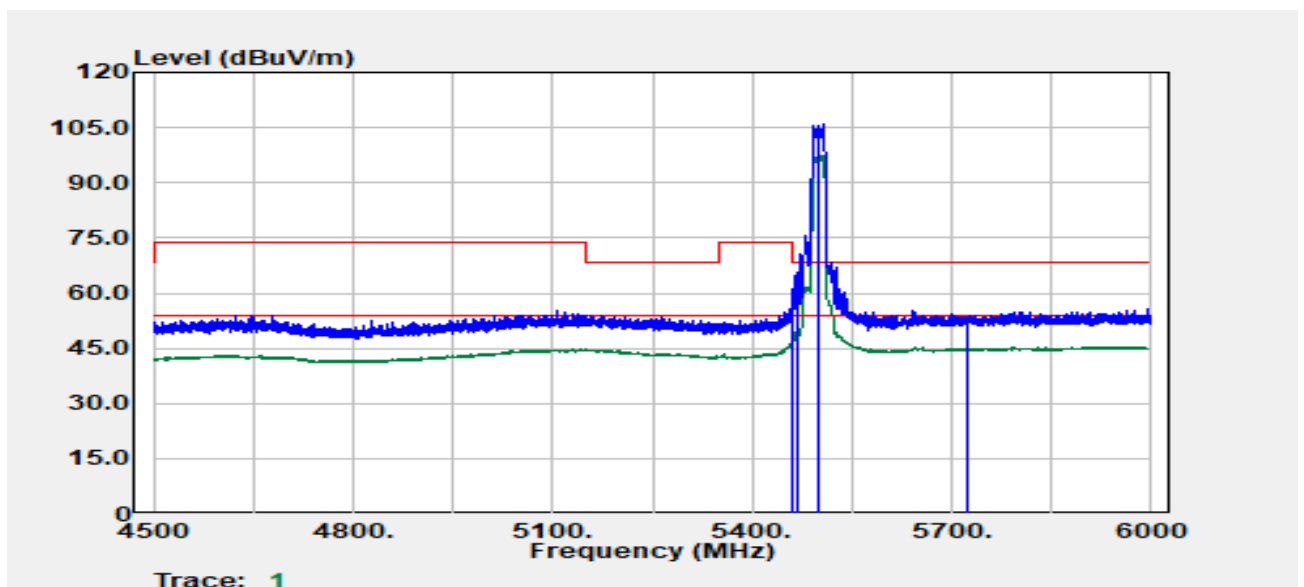

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5458.410	Peak	43.89	12.40	56.30	74.00	-17.70
5460.000	Average	33.94	12.41	46.35	54.00	-7.65
5467.411	Peak	53.11	12.44	65.54	68.20	-2.66
5500.000	Peak	93.22	12.55	105.77	--	--
5500.000	Average	84.72	12.55	97.27	--	--
5725.000	Peak	38.50	13.69	52.19	68.20	-16.01

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

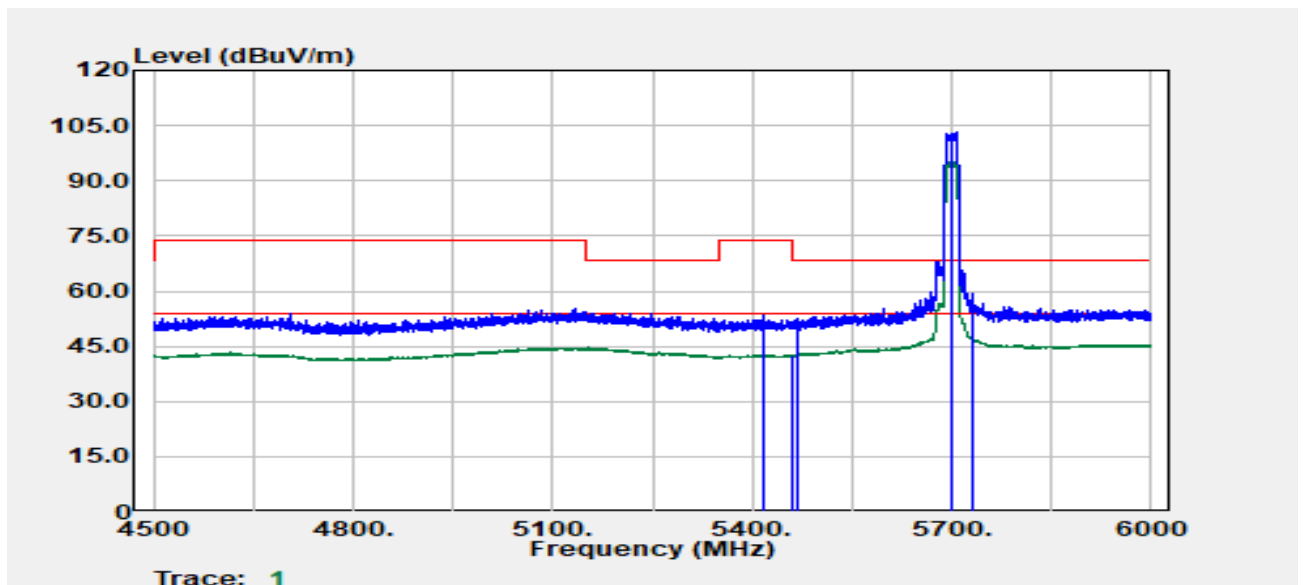

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5415.300	Peak	40.93	12.34	53.27	74.00	-20.73
5460.000	Average	30.22	12.41	42.63	54.00	-11.37
5466.300	Peak	40.18	12.43	52.61	68.20	-15.59
5700.000	Peak	89.77	13.56	103.33	--	--
5700.000	Average	81.78	13.56	95.34	--	--
5731.800	Peak	45.74	13.73	59.47	68.20	-8.73

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

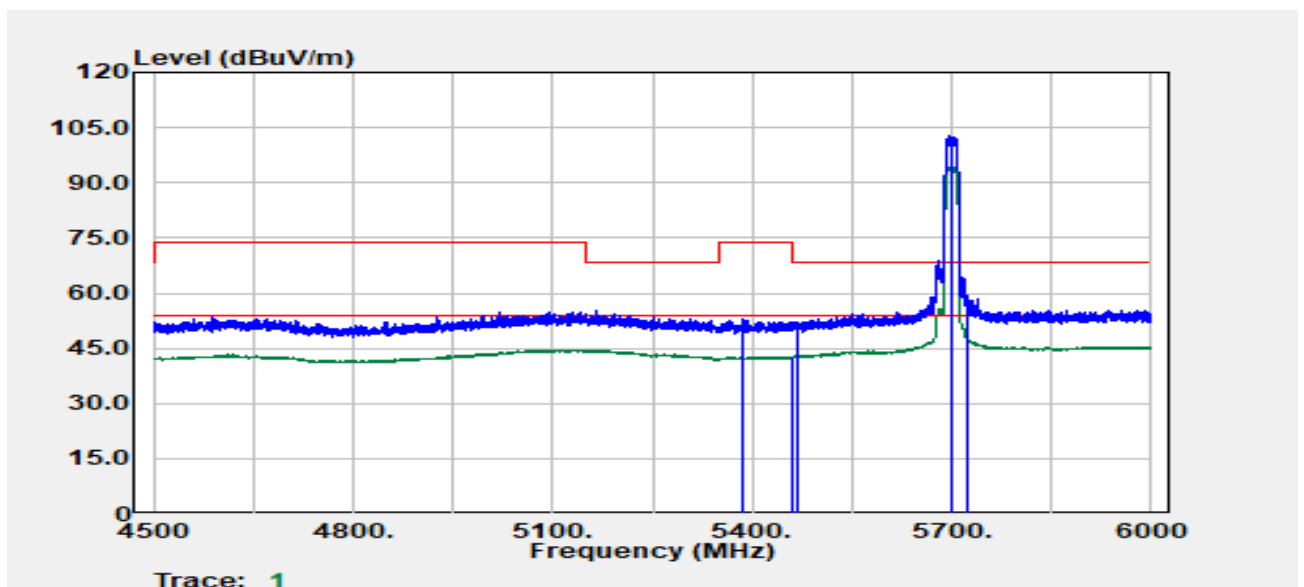

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5384.700	Peak	40.92	12.26	53.18	74.00	-20.82
5459.700	Average	30.34	12.41	42.75	54.00	-11.25
5466.600	Peak	39.70	12.43	52.13	68.20	-16.07
5700.000	Peak	89.10	13.56	102.66	--	--
5700.000	Average	80.90	13.56	94.46	--	--
5725.200	Peak	45.67	13.69	59.36	68.20	-8.84

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

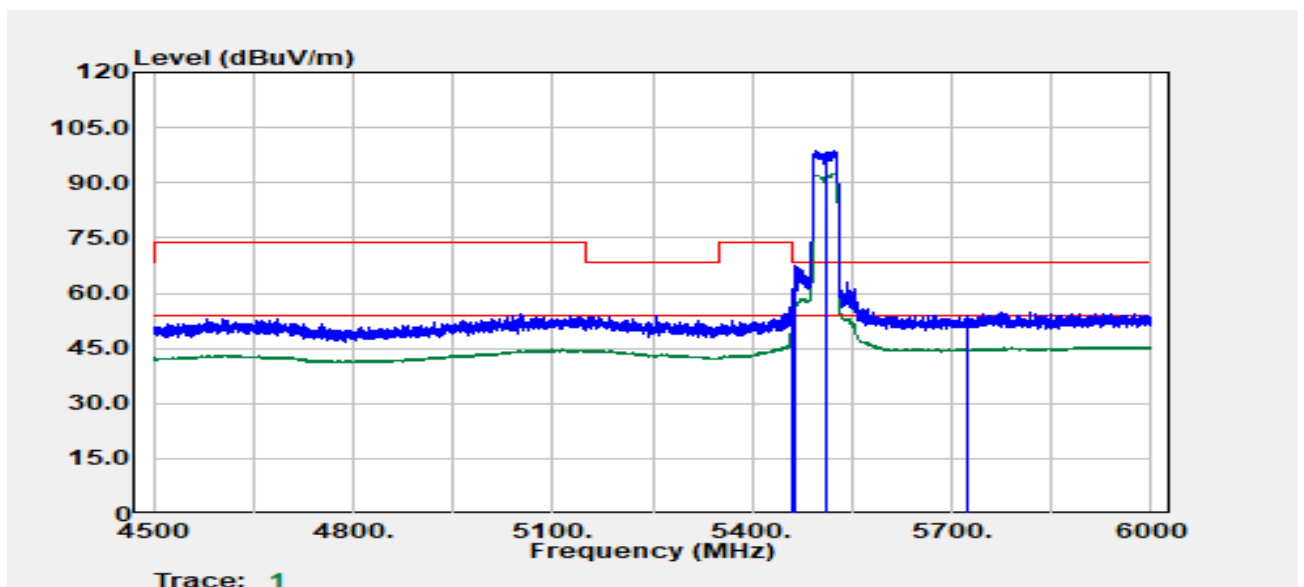

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5460.000	Peak	46.95	12.41	59.36	68.20	-8.84
5460.000	Average	38.64	12.41	51.05	54.00	-2.95
5465.100	Peak	55.00	12.43	67.43	68.20	-0.77
5510.000	Peak	86.07	12.62	98.70	--	--
5510.000	Average	79.83	12.62	92.45	--	--
5725.000	Peak	37.47	13.69	51.16	68.20	-17.04

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

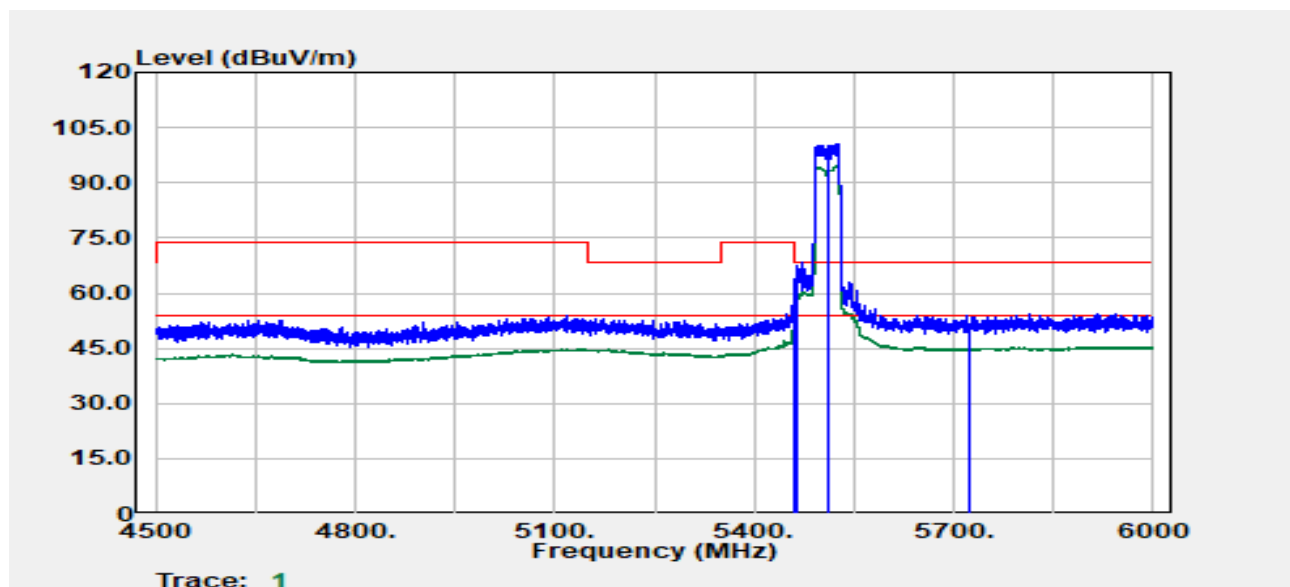

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5459.700	Peak	49.46	12.41	61.86	74.00	-12.14
5460.000	Average	40.51	12.41	52.92	54.00	-1.08
5465.400	Peak	54.82	12.43	67.25	68.20	-0.95
5510.000	Peak	88.08	12.62	100.70	--	--
5510.000	Average	81.96	12.62	94.58	--	--
5725.000	Peak	36.77	13.69	50.46	68.20	-17.74

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5670 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

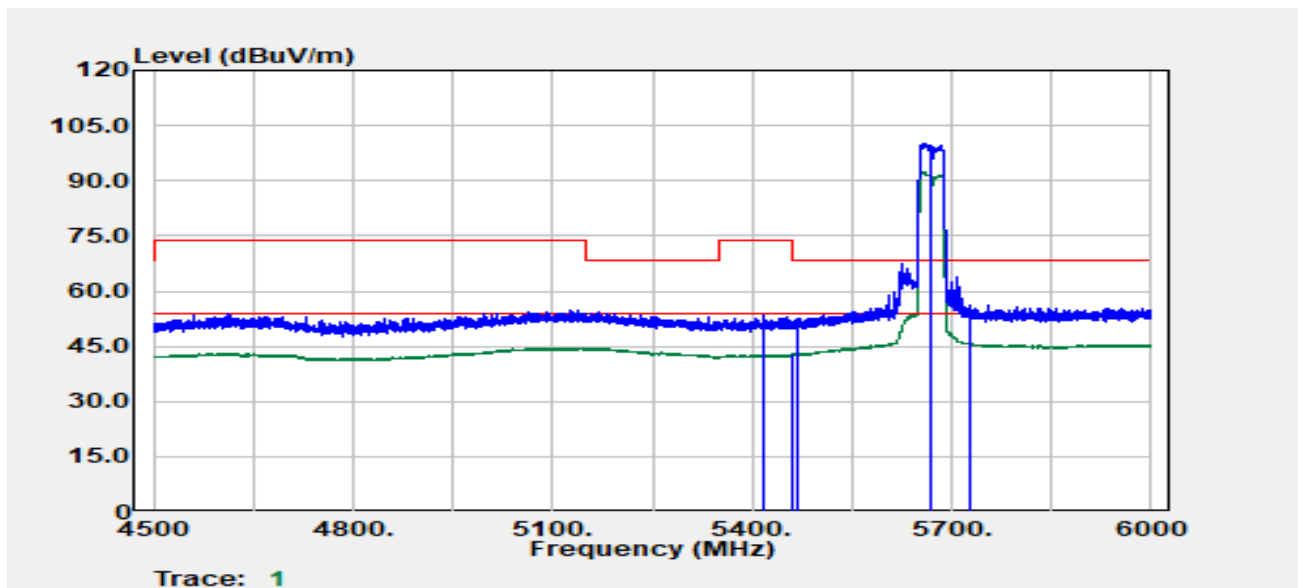

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5416.500	Peak	40.88	12.34	53.22	74.00	-20.78
5459.400	Average	30.42	12.41	42.83	54.00	-11.17
5469.300	Peak	40.09	12.44	52.53	68.20	-15.67
5670.000	Peak	86.64	13.39	100.03	--	--
5670.000	Average	78.91	13.39	92.30	--	--
5728.500	Peak	42.39	13.71	56.10	68.20	-12.10

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-29
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

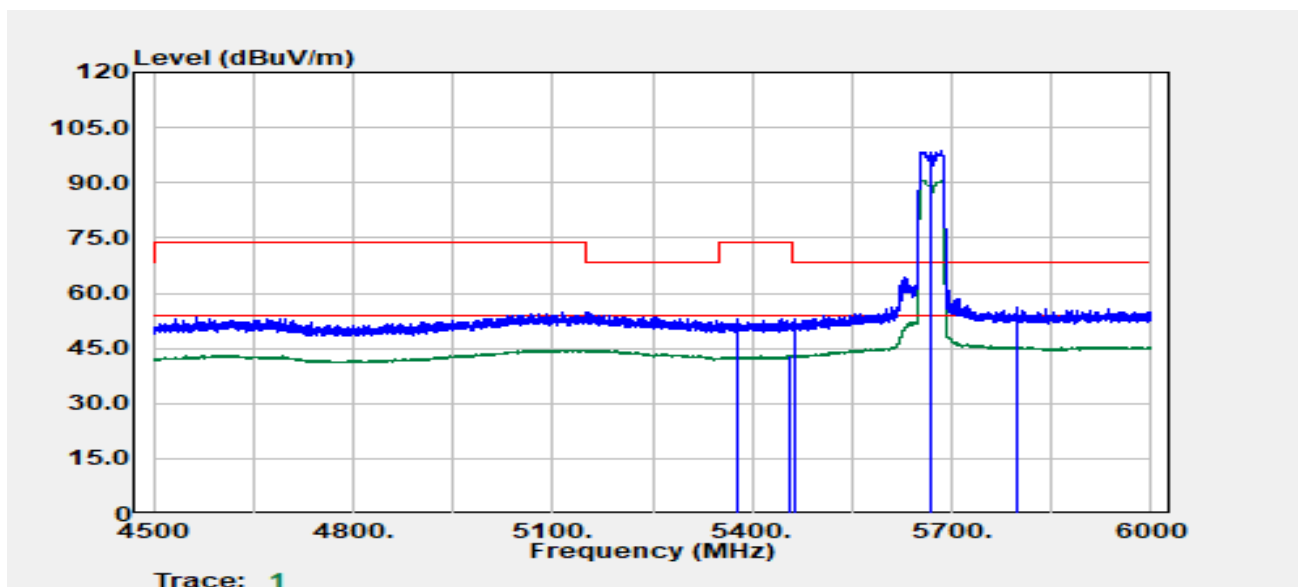

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5378.700	Peak	40.94	12.24	53.18	74.00	-20.82
5457.600	Average	30.46	12.40	42.86	54.00	-11.14
5463.000	Peak	40.54	12.42	52.96	68.20	-15.24
5670.000	Peak	85.18	13.39	98.57	--	--
5670.000	Average	77.35	13.39	90.74	--	--
5796.600	Peak	41.80	14.14	55.93	68.20	-12.27

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :51


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

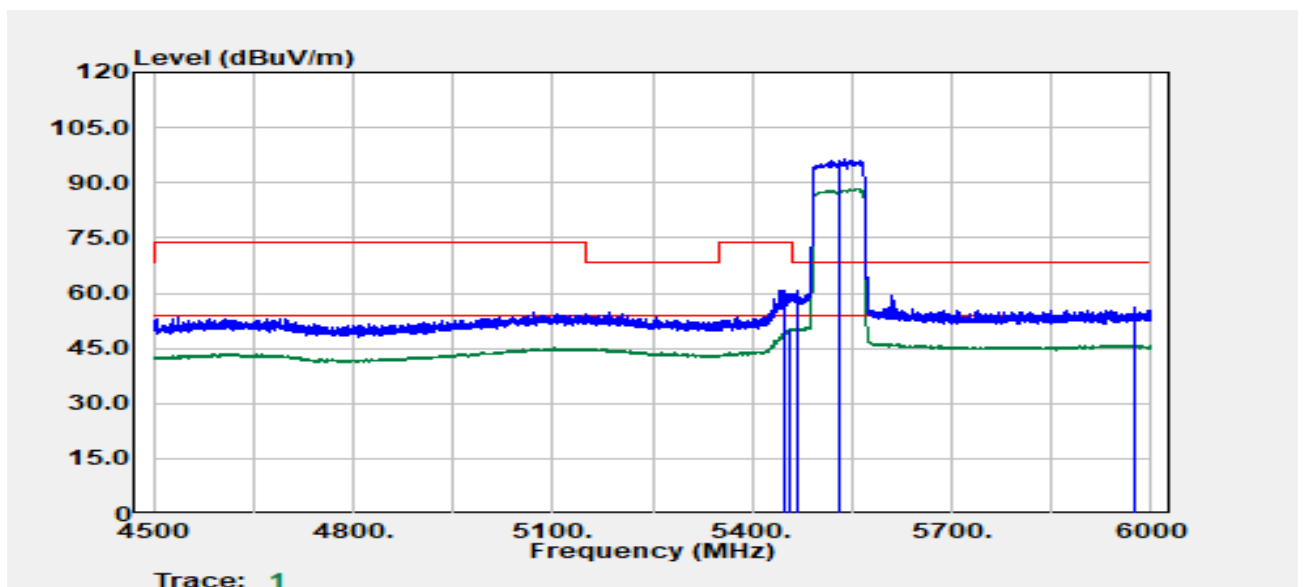

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5449.200	Peak	48.29	12.37	60.67	74.00	-13.33
5456.400	Average	37.76	12.40	50.16	54.00	-3.84
5468.400	Peak	48.15	12.44	60.59	68.20	-7.61
5530.000	Peak	83.48	12.77	96.25	--	--
5530.000	Average	75.59	12.77	88.36	--	--
5976.000	Peak	41.80	14.15	55.95	68.20	-12.25

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :51


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

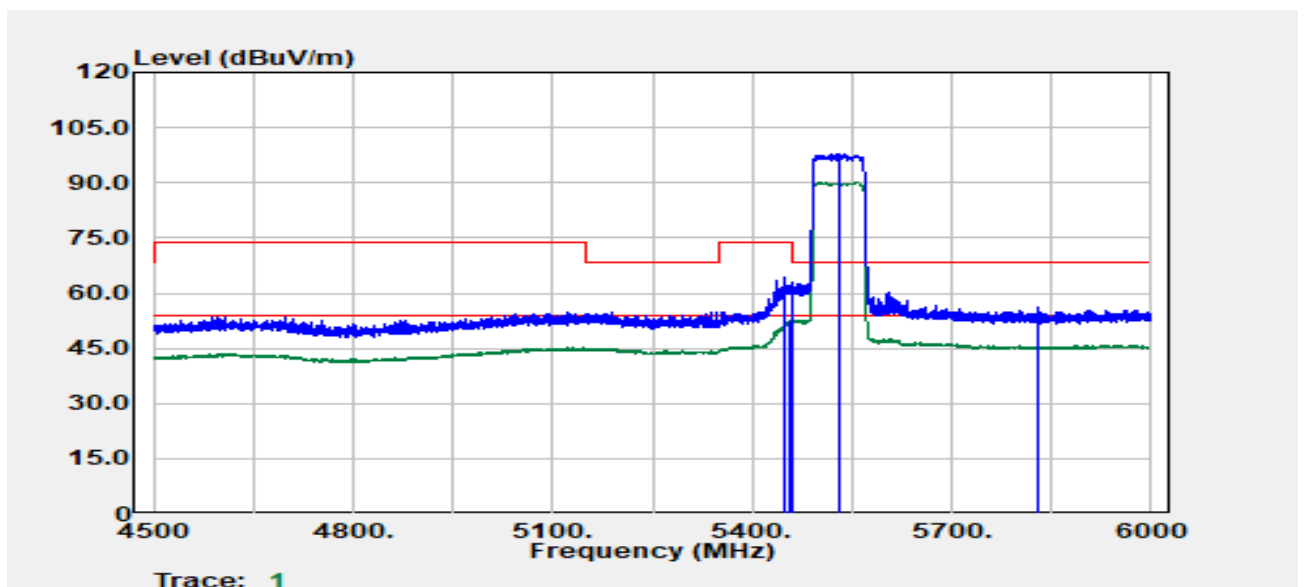

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5448.900	Peak	51.97	12.37	64.35	74.00	-9.65
5455.500	Average	40.25	12.39	52.65	54.00	-1.35
5460.600	Peak	50.45	12.41	62.86	68.20	-5.34
5530.000	Peak	84.92	12.77	97.69	--	--
5530.000	Average	77.33	12.77	90.10	--	--
5831.400	Peak	41.87	14.07	55.94	68.20	-12.26

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

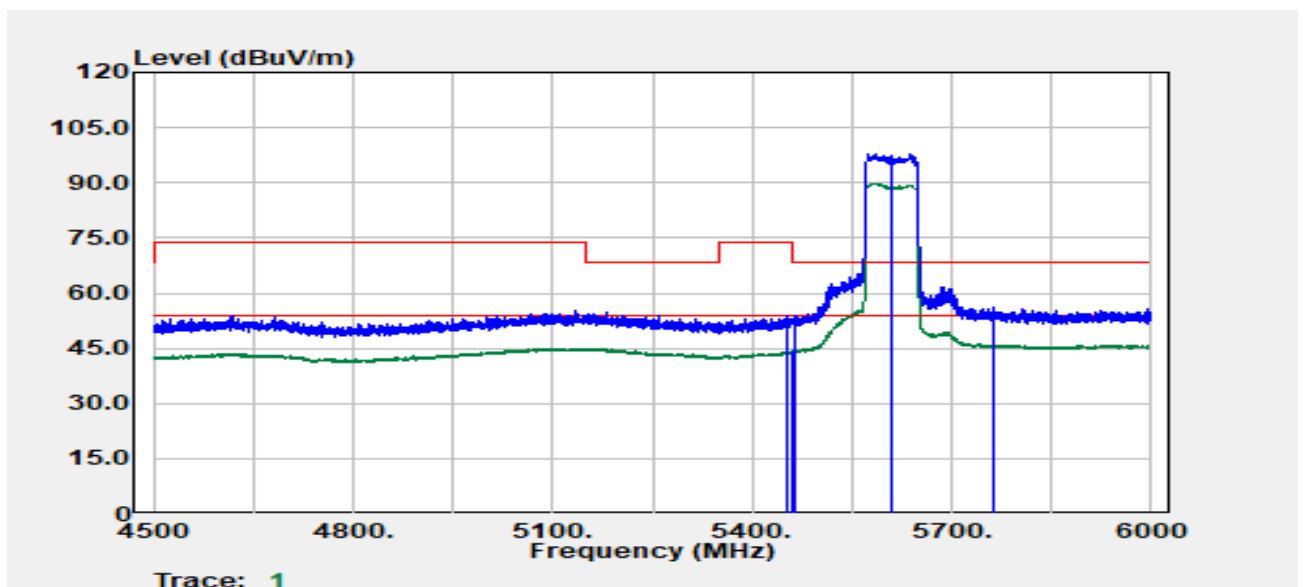

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5451.000	Peak	41.47	12.38	53.85	74.00	-20.15
5460.000	Average	31.87	12.41	44.28	54.00	-9.72
5464.800	Peak	41.36	12.43	53.79	68.20	-14.41
5610.000	Peak	85.00	12.92	97.92	--	--
5610.000	Average	76.88	12.92	89.80	--	--
5763.600	Peak	42.23	13.91	56.14	68.20	-12.06

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-30
Temp./Humi. :24.4/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

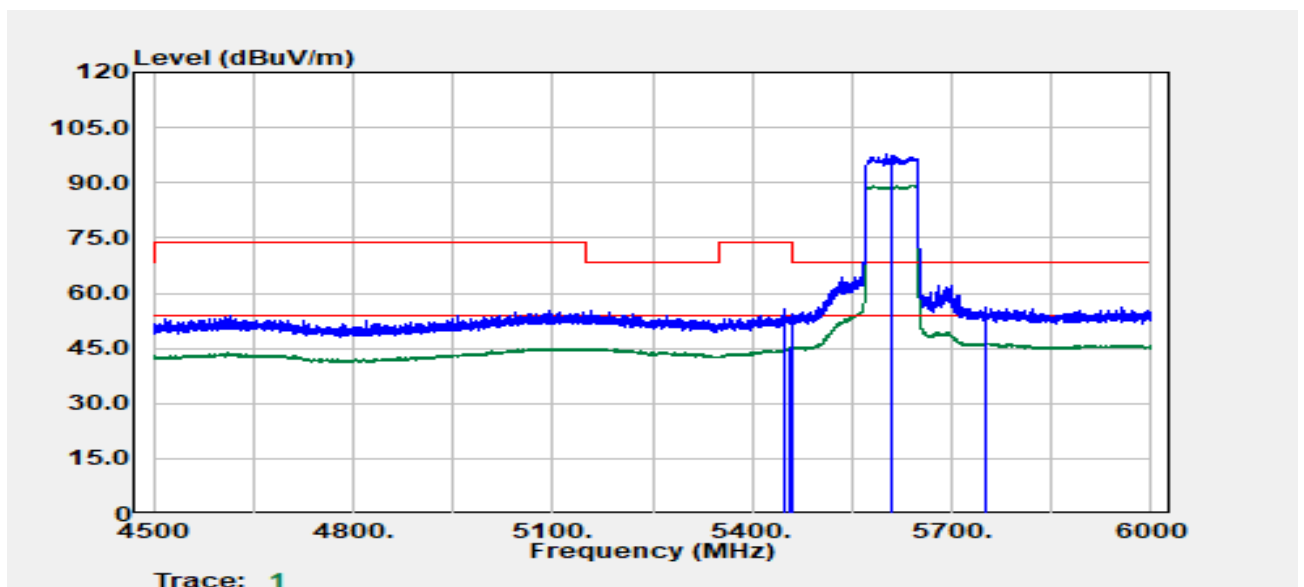

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5449.200	Peak	43.27	12.37	55.65	74.00	-18.35
5457.300	Average	32.71	12.40	45.11	54.00	-8.89
5462.100	Peak	41.86	12.42	54.28	68.20	-13.92
5610.000	Peak	84.91	12.92	97.83	--	--
5610.000	Average	76.41	12.92	89.33	--	--
5750.400	Peak	42.32	13.82	56.14	68.20	-12.06

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

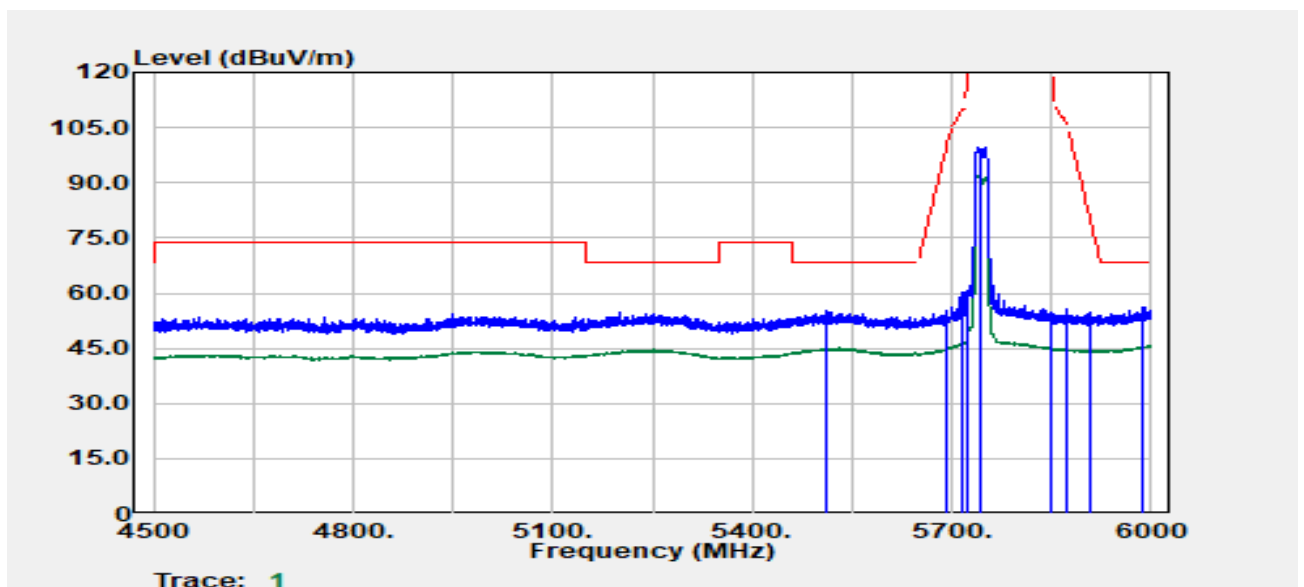


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5509.800	Peak	42.62	12.62	55.24	68.20	-12.96
5692.800	Peak	41.90	13.52	55.42	99.89	-44.47
5713.800	Peak	46.50	13.63	60.14	109.07	-48.93
5723.400	Peak	47.21	13.68	60.90	118.55	-57.66
5745.000	Peak	85.61	13.79	99.40	--	--
5745.000	Average	78.30	13.79	92.10	--	--
5850.300	Peak	40.56	14.02	54.58	121.52	-66.94
5872.200	Peak	41.57	14.02	55.59	105.98	-50.39
5910.000	Peak	40.52	14.06	54.57	79.27	-24.70
5985.900	Peak	41.82	14.15	55.97	68.20	-12.23

Report No.: TMWK2308002691KR

Page 191 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

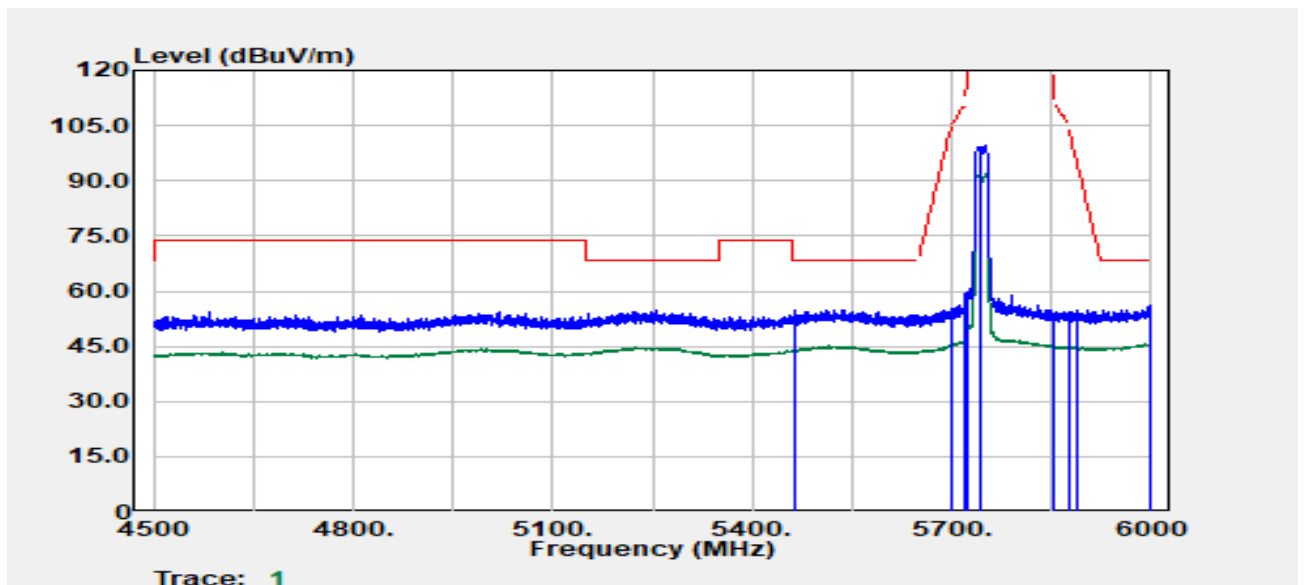

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5463.300	Peak	42.48	12.42	54.90	68.20	-13.30
5700.000	Peak	41.89	13.56	55.45	105.20	-49.75
5718.600	Peak	44.96	13.66	58.61	110.41	-51.79
5724.900	Peak	45.52	13.69	59.21	121.97	-62.77
5745.000	Peak	85.90	13.79	99.69	--	--
5745.000	Average	78.21	13.79	92.00	--	--
5853.000	Peak	39.73	14.02	53.75	115.36	-61.61
5874.900	Peak	40.40	14.02	54.42	105.23	-50.81
5889.900	Peak	40.95	14.03	54.98	94.14	-39.16
5999.700	Peak	41.86	14.15	56.01	68.20	-12.19

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

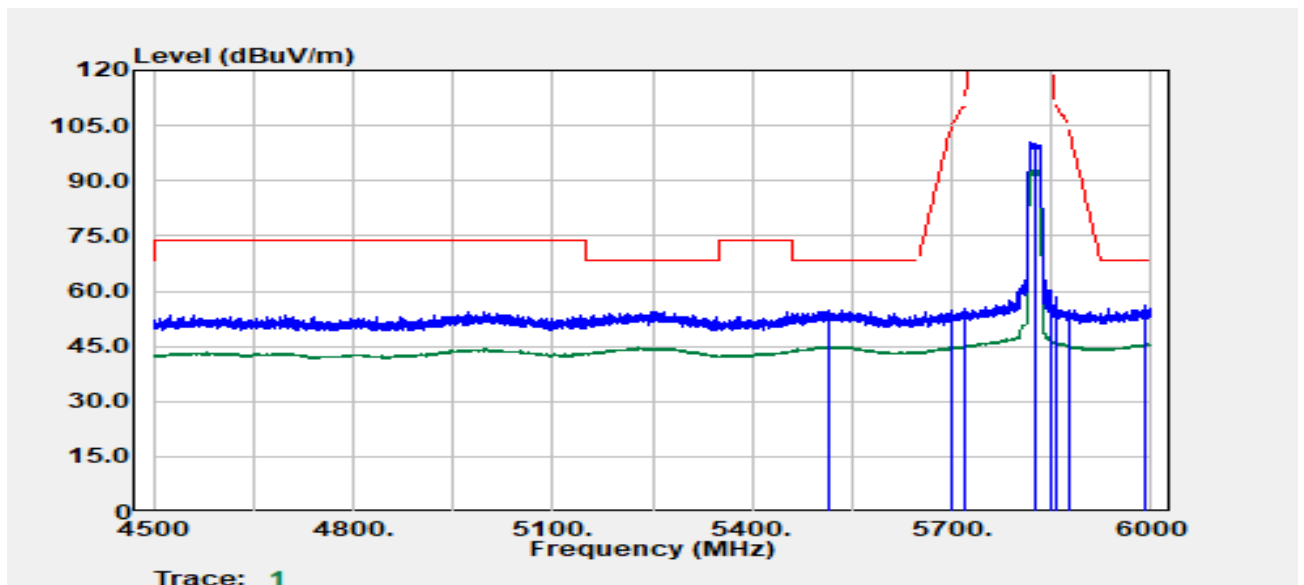

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5513.400	Peak	42.24	12.65	54.89	68.20	-13.31
5699.400	Peak	41.06	13.56	54.62	104.76	-50.14
5718.300	Peak	41.47	13.66	55.12	110.32	-55.20
5721.000	Peak	41.37	13.67	55.04	113.08	-58.04
5825.000	Peak	86.30	14.09	100.39	--	--
5825.000	Average	79.01	14.09	93.10	--	--
5850.300	Peak	42.20	14.02	56.22	121.52	-65.30
5855.400	Peak	44.29	14.02	58.31	110.69	-52.37
5877.000	Peak	40.79	14.03	54.81	103.71	-48.90
5990.700	Peak	41.95	14.15	56.10	68.20	-12.10

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

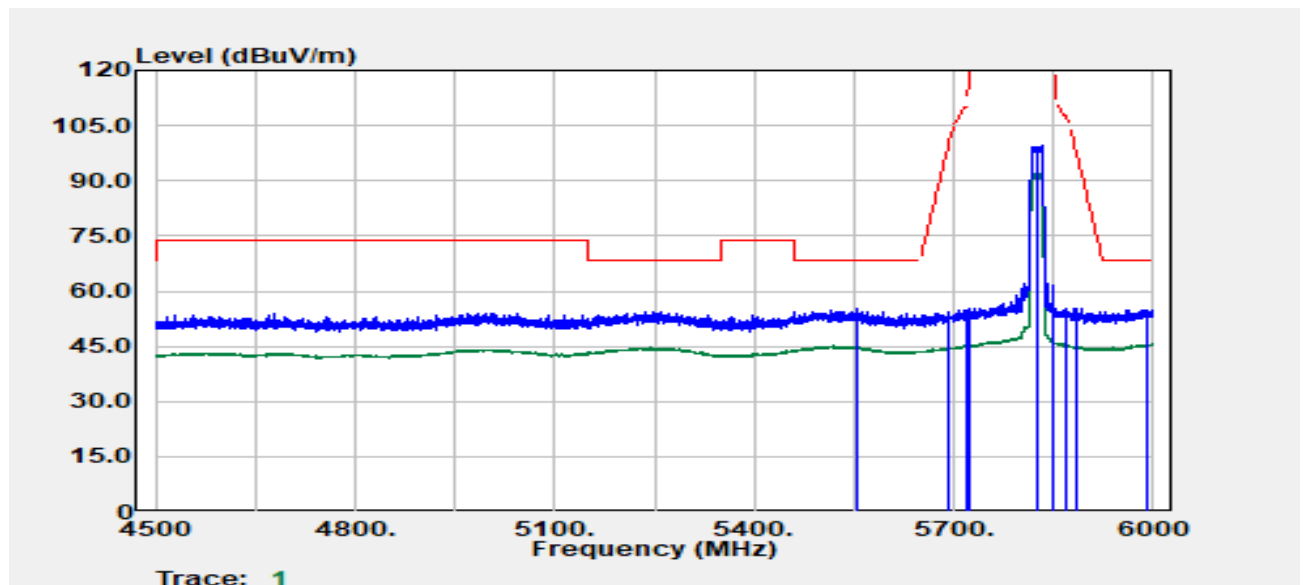

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5556.300	Peak	42.15	12.90	55.06	68.20	-13.14
5694.000	Peak	40.92	13.53	54.45	100.78	-46.33
5718.600	Peak	41.13	13.66	54.78	110.41	-55.62
5724.600	Peak	40.66	13.69	54.35	121.29	-66.94
5825.000	Peak	85.47	14.09	99.56	--	--
5825.000	Average	77.91	14.09	92.00	--	--
5850.900	Peak	44.25	14.02	58.27	120.15	-61.88
5868.300	Peak	41.01	14.02	55.04	107.07	-52.04
5882.700	Peak	41.24	14.03	55.26	99.48	-44.22
5991.900	Peak	40.80	14.15	54.96	68.20	-13.24

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

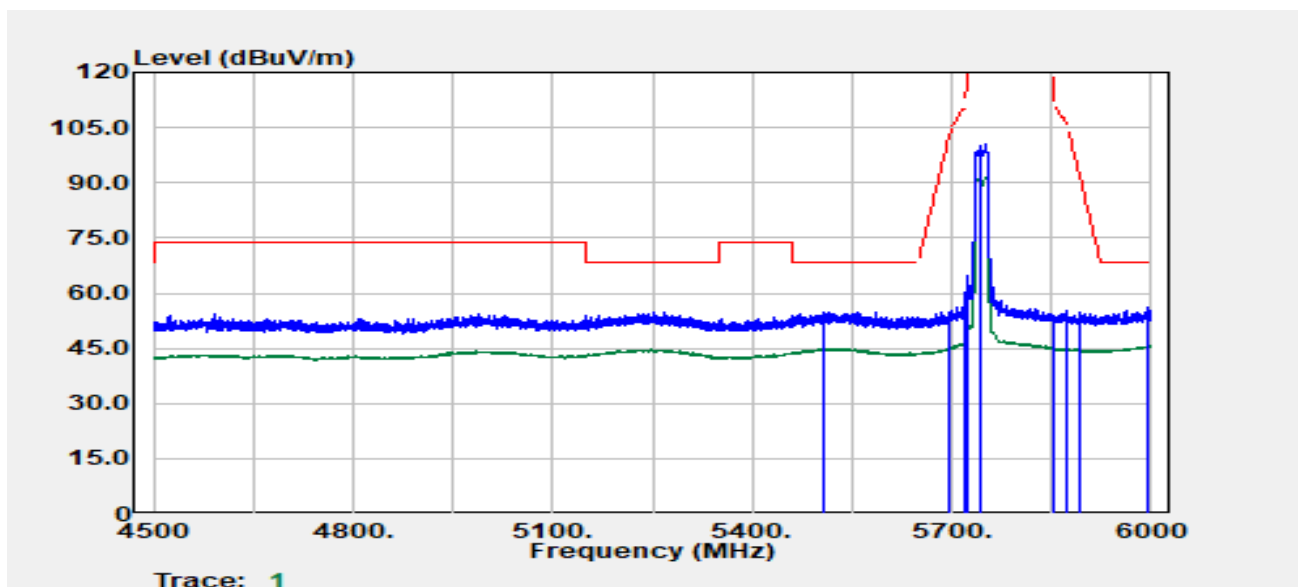

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5508.000	Peak	42.41	12.61	55.01	68.20	-13.19
5694.600	Peak	41.21	13.53	54.74	101.22	-46.48
5720.100	Peak	45.20	13.66	58.86	111.03	-52.16
5724.900	Peak	50.90	13.69	64.59	121.97	-57.38
5745.000	Peak	86.53	13.79	100.32	--	--
5745.000	Average	77.83	13.79	91.62	--	--
5852.400	Peak	40.01	14.02	54.03	116.73	-62.70
5873.700	Peak	41.14	14.02	55.16	105.56	-50.40
5892.900	Peak	40.74	14.03	54.76	91.92	-37.15
5996.100	Peak	42.16	14.15	56.31	68.20	-11.89

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

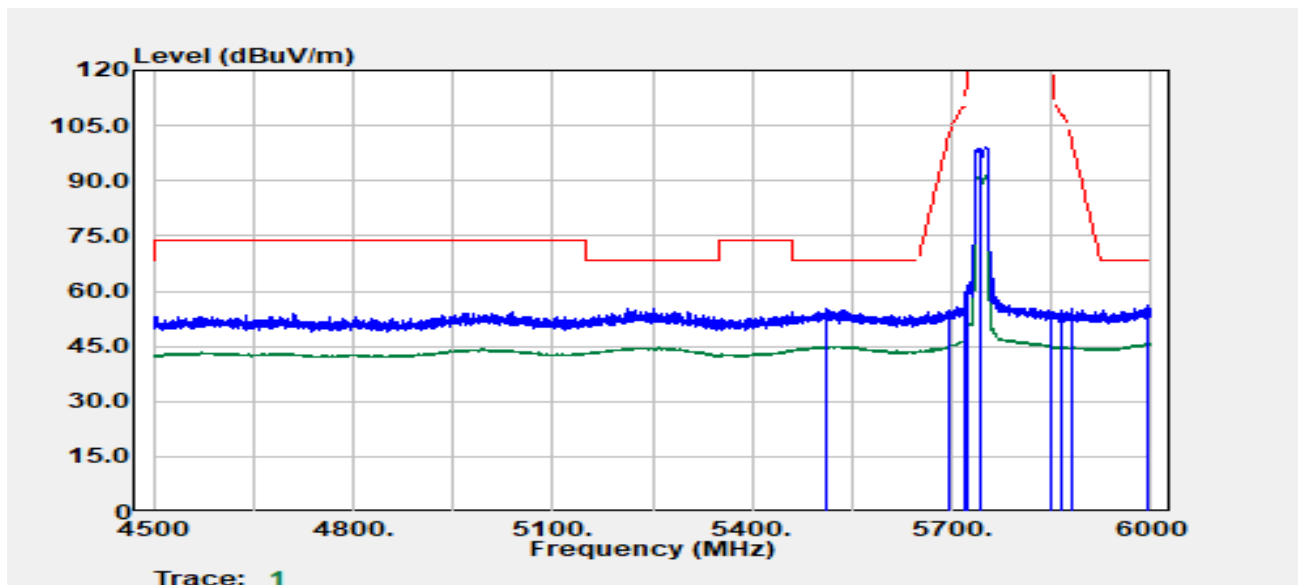

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5513.100	Peak	42.75	12.65	55.40	68.20	-12.80
5697.600	Peak	41.08	13.55	54.63	103.43	-48.81
5719.800	Peak	43.32	13.66	56.98	110.74	-53.76
5721.600	Peak	47.57	13.67	61.24	114.45	-53.21
5745.000	Peak	85.30	13.79	99.10	--	--
5745.000	Average	77.77	13.79	91.56	--	--
5850.300	Peak	40.23	14.02	54.25	121.52	-67.26
5864.100	Peak	40.98	14.02	55.00	108.25	-53.25
5878.800	Peak	41.28	14.03	55.31	102.38	-47.07
5995.800	Peak	41.79	14.15	55.94	68.20	-12.26

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

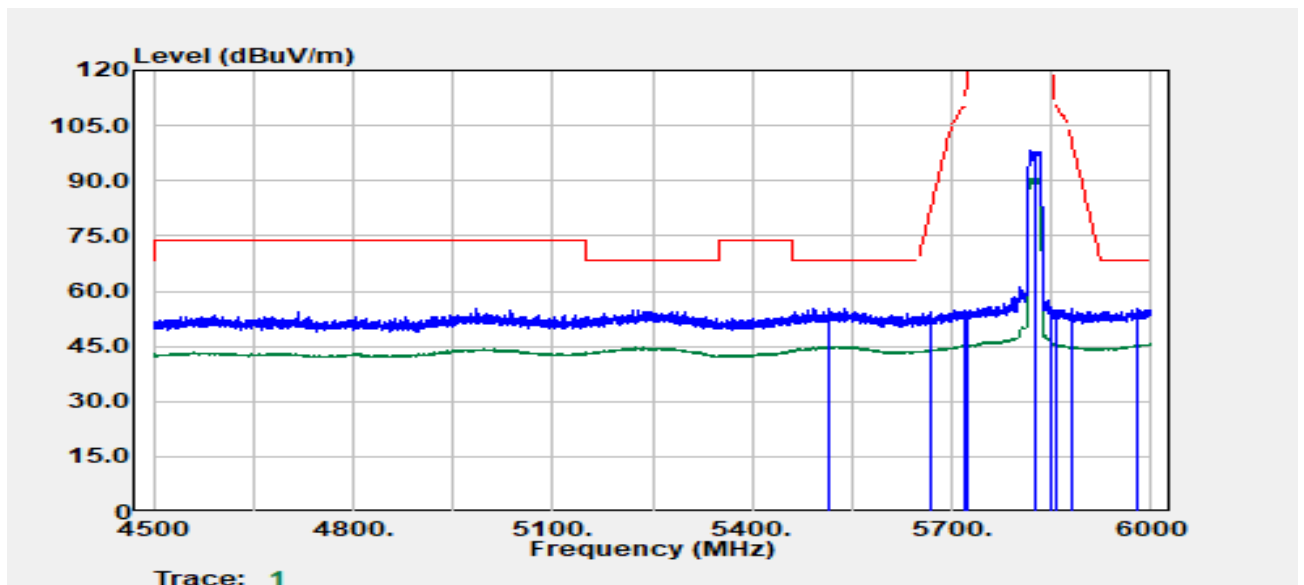


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5515.800	Peak	42.66	12.67	55.33	68.20	-12.87
5670.000	Peak	40.81	13.39	54.20	83.04	-28.84
5718.300	Peak	41.33	13.66	54.98	110.32	-55.34
5724.000	Peak	40.58	13.68	54.27	119.92	-65.65
5825.000	Peak	84.10	14.09	98.19	--	--
5825.000	Average	76.70	14.09	90.79	--	--
5850.300	Peak	40.99	14.02	55.01	121.52	-66.50
5857.800	Peak	40.80	14.02	54.82	110.01	-55.19
5880.900	Peak	41.40	14.03	55.43	100.82	-45.39
5978.700	Peak	41.22	14.15	55.37	68.20	-12.83

Report No.: TMWK2308002691KR

Page 197 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

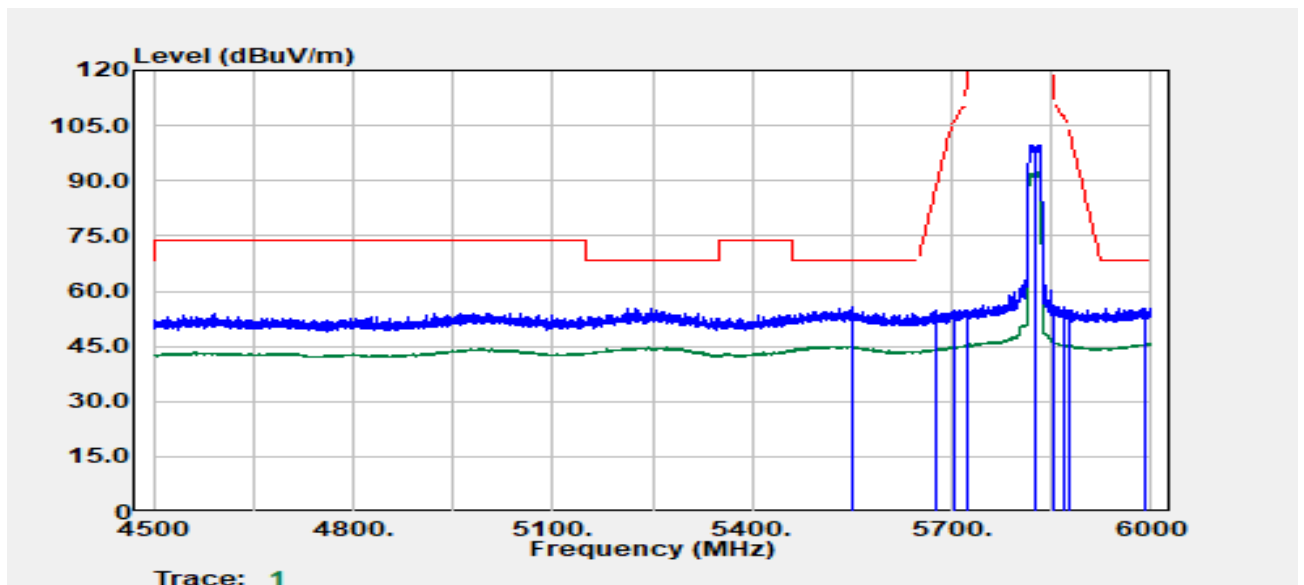

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5551.200	Peak	42.68	12.91	55.59	68.20	-12.61
5674.500	Peak	41.20	13.42	54.61	86.37	-31.76
5704.200	Peak	41.39	13.58	54.98	106.38	-51.40
5723.400	Peak	40.96	13.68	54.64	118.55	-63.92
5825.000	Peak	85.74	14.09	99.83	--	--
5825.000	Average	78.14	14.09	92.23	--	--
5853.300	Peak	42.04	14.02	56.06	114.67	-58.61
5867.400	Peak	41.65	14.02	55.68	107.33	-51.65
5877.000	Peak	40.84	14.03	54.87	103.71	-48.85
5990.400	Peak	41.28	14.15	55.43	68.20	-12.77

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

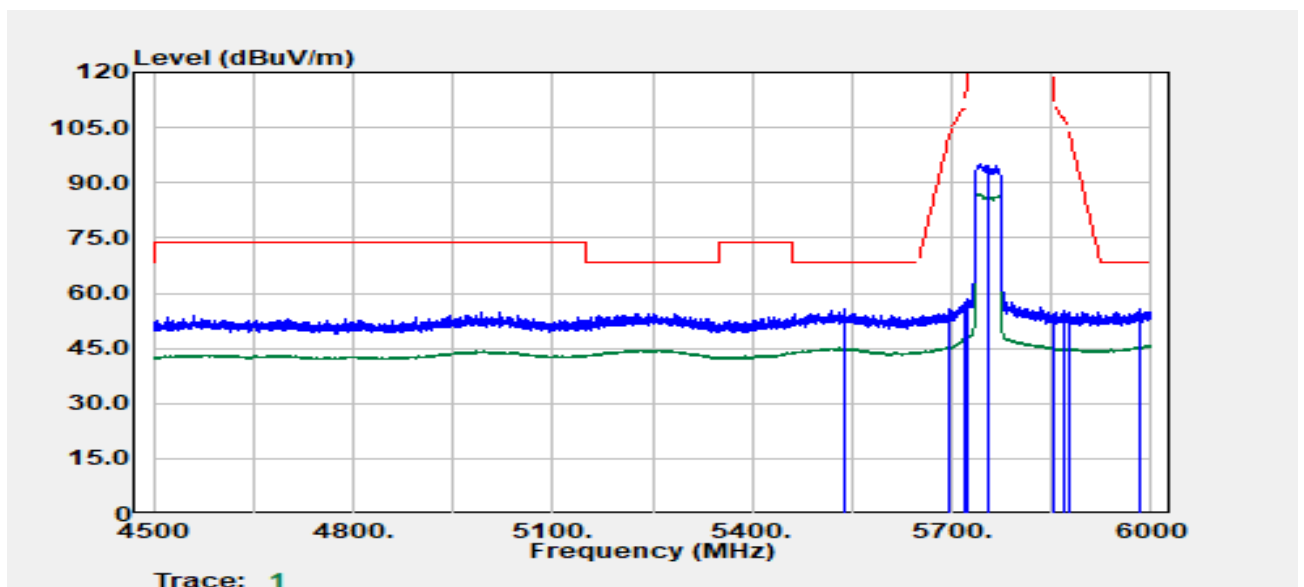

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5538.600	Peak	43.05	12.83	55.88	68.20	-12.32
5695.500	Peak	42.34	13.53	55.87	101.88	-46.01
5718.900	Peak	44.02	13.66	57.68	110.49	-52.81
5721.900	Peak	44.84	13.67	58.51	115.13	-56.62
5755.000	Peak	81.17	13.85	95.02	--	--
5755.000	Average	73.11	13.85	86.96	--	--
5851.500	Peak	40.45	14.02	54.47	118.78	-64.31
5869.500	Peak	41.31	14.02	55.33	106.74	-51.41
5878.200	Peak	40.99	14.03	55.01	102.82	-47.81
5983.800	Peak	41.64	14.15	55.79	68.20	-12.41

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

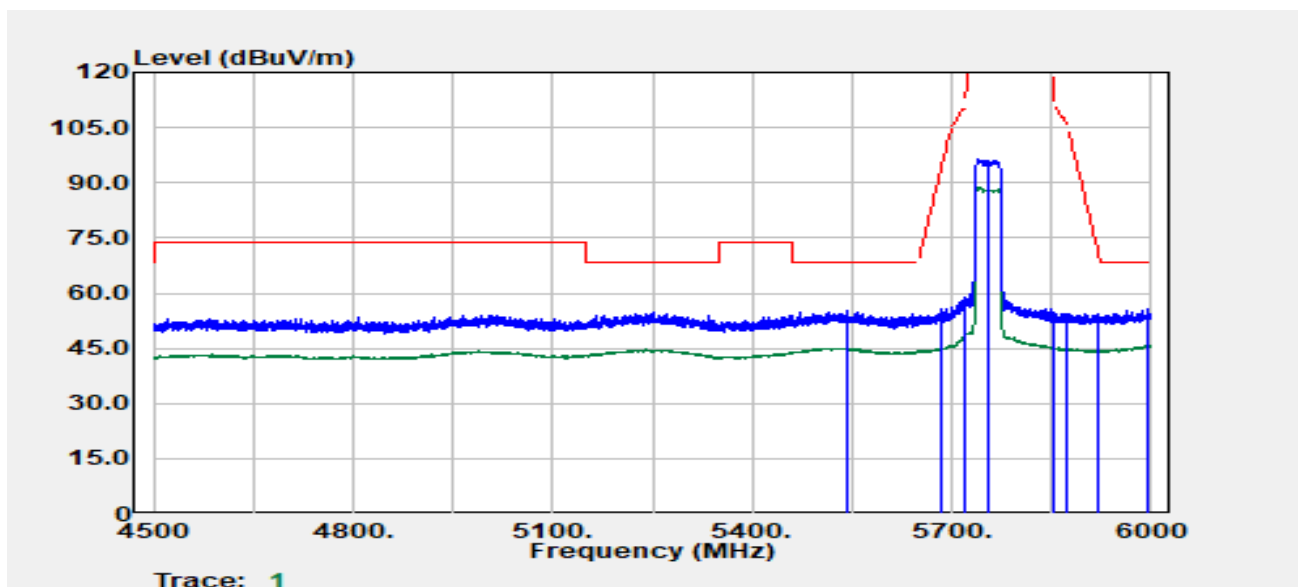


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5543.400	Peak	42.43	12.87	55.30	68.20	-12.90
5685.900	Peak	42.18	13.48	55.66	94.80	-39.14
5719.800	Peak	45.04	13.66	58.70	110.74	-52.04
5721.000	Peak	44.66	13.67	58.33	113.08	-54.75
5755.000	Peak	82.46	13.85	96.31	--	--
5755.000	Average	74.77	13.85	88.63	--	--
5851.800	Peak	40.90	14.02	54.92	118.09	-63.17
5871.600	Peak	40.46	14.02	54.49	106.15	-51.66
5919.000	Peak	40.26	14.08	54.34	72.62	-18.29
5996.400	Peak	41.37	14.15	55.52	68.20	-12.68

Report No.: TMWK2308002691KR

Page 200 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

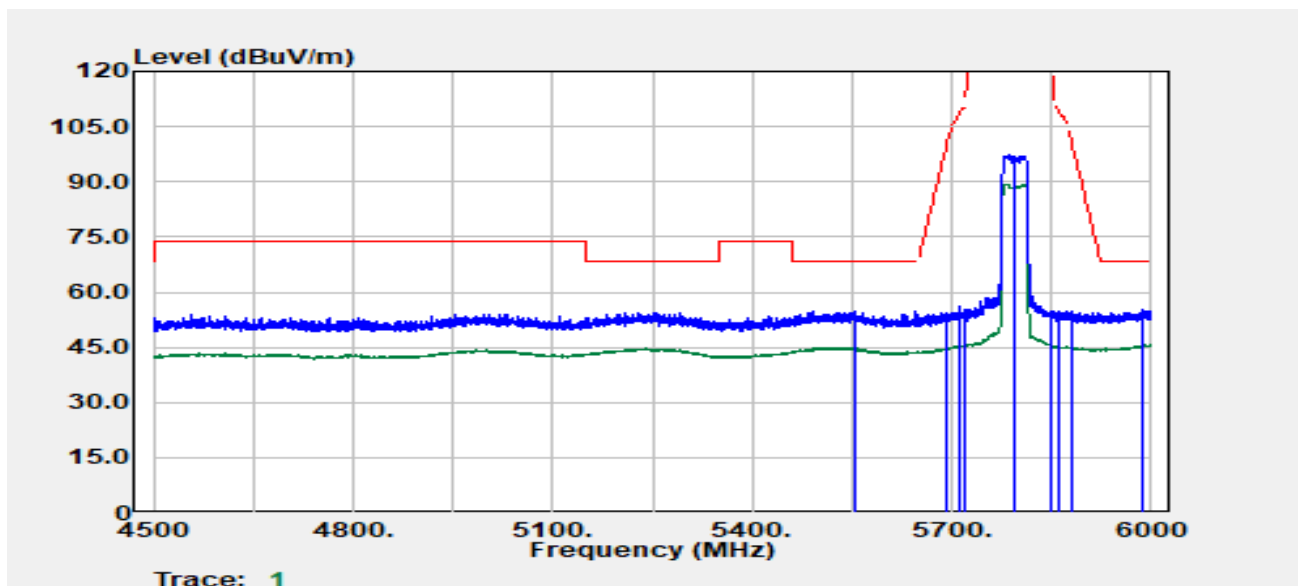


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5556.000	Peak	41.99	12.90	54.90	68.20	-13.30
5692.800	Peak	40.87	13.52	54.39	99.89	-45.51
5711.100	Peak	42.42	13.62	56.04	108.31	-52.27
5721.000	Peak	41.45	13.67	55.12	113.08	-57.96
5795.000	Peak	83.31	14.13	97.44	--	--
5795.000	Average	75.15	14.13	89.28	--	--
5850.300	Peak	40.33	14.02	54.35	121.52	-67.16
5861.400	Peak	40.89	14.02	54.91	109.01	-54.10
5881.200	Peak	40.54	14.03	54.57	100.59	-46.03
5987.700	Peak	41.25	14.15	55.40	68.20	-12.80

Report No.: TMWK2308002691KR

Page 201 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

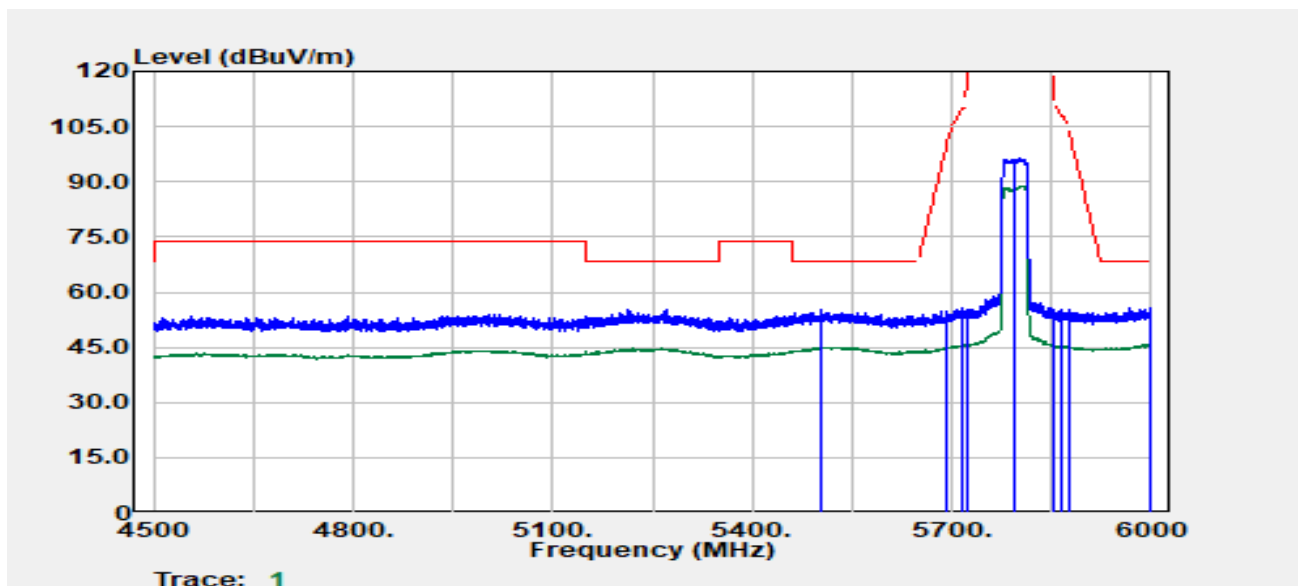

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5504.100	Peak	42.60	12.58	55.18	68.20	-13.02
5691.600	Peak	41.31	13.51	54.83	99.01	-44.18
5716.500	Peak	41.92	13.65	55.56	109.82	-54.26
5724.600	Peak	41.39	13.69	55.08	121.29	-66.21
5795.000	Peak	82.26	14.13	96.38	--	--
5795.000	Average	74.54	14.13	88.67	--	--
5853.000	Peak	41.19	14.02	55.21	115.36	-60.14
5864.100	Peak	41.33	14.02	55.35	108.25	-52.90
5876.100	Peak	41.13	14.03	55.15	104.38	-49.23
5999.700	Peak	41.67	14.15	55.82	68.20	-12.38

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray.Li
Test Chamber : 966A

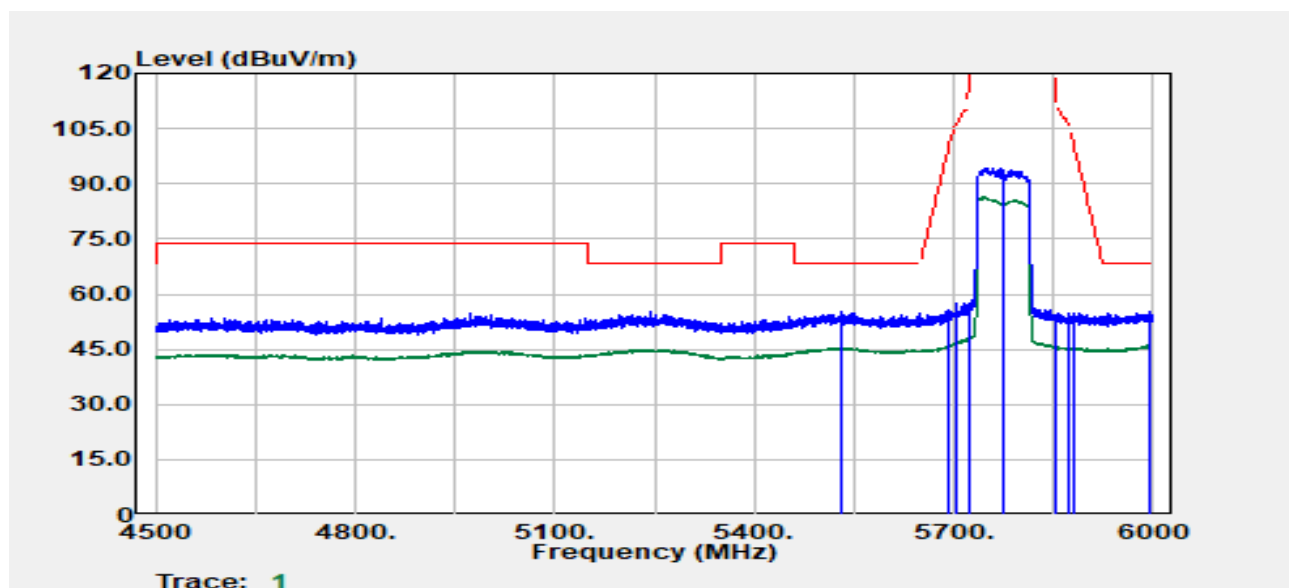


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5532.600	Peak	42.35	12.79	55.14	68.20	-13.06
5690.400	Peak	42.36	13.51	55.87	98.12	-42.25
5705.400	Peak	43.98	13.59	57.57	106.71	-49.14
5723.700	Peak	43.66	13.68	57.35	119.24	-61.89
5775.000	Peak	80.21	13.99	94.20	--	--
5775.000	Average	72.32	13.99	86.31	--	--
5852.700	Peak	40.37	14.02	54.39	116.04	-61.65
5871.300	Peak	40.77	14.02	54.80	106.23	-51.44
5879.100	Peak	40.81	14.03	54.83	102.15	-47.32
5994.000	Peak	40.93	14.15	55.08	68.20	-13.12

Report No.: TMWK2308002691KR

Page 203 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray.Li
Test Chamber : 966A

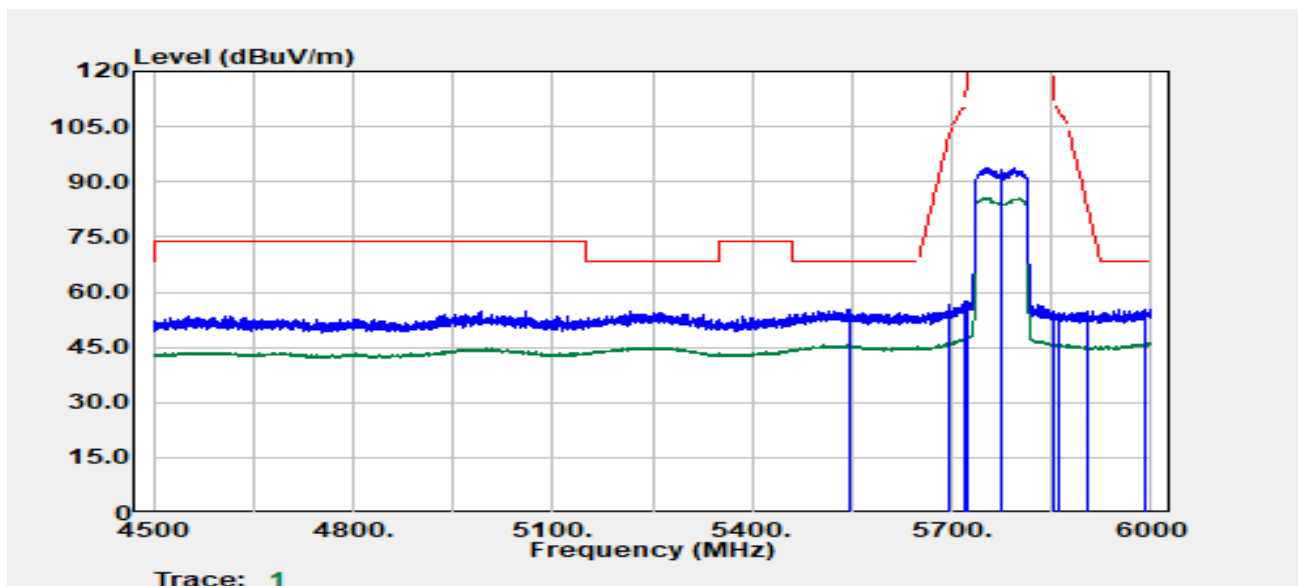

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5547.300	Peak	42.55	12.90	55.45	68.20	-12.75
5696.100	Peak	43.04	13.54	56.58	102.33	-45.75
5718.300	Peak	43.78	13.66	57.43	110.32	-52.89
5724.600	Peak	43.81	13.69	57.50	121.29	-63.79
5775.000	Peak	79.70	13.99	93.69	--	--
5775.000	Average	71.60	13.99	85.59	--	--
5853.900	Peak	40.94	14.02	54.96	113.31	-58.34
5859.300	Peak	40.45	14.02	54.47	109.59	-55.13
5903.100	Peak	40.74	14.04	54.78	84.37	-29.59
5992.500	Peak	41.15	14.15	55.30	68.20	-12.90

TX Test Data: (FCC_Below 1GHz)


Project Number	:TM-2308000057P	Test Date	:2023-09-01
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.6/58
Frequency	:5210 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray.Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:		

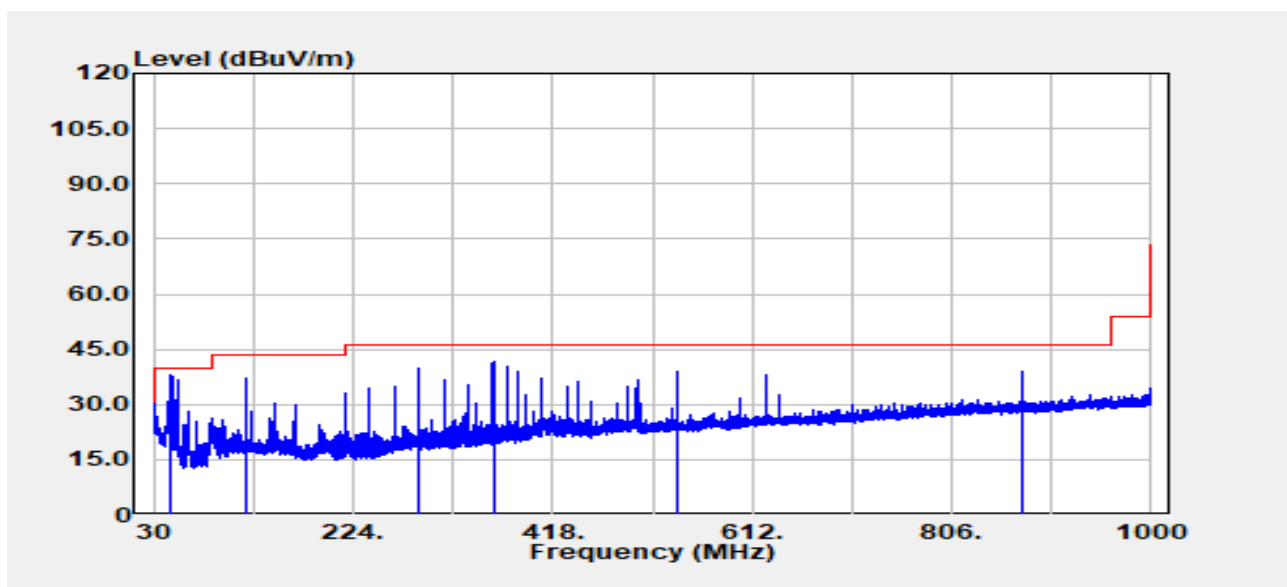

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
46.490	Peak	52.09	-14.14	37.96	40.00	-2.04
119.968	Peak	46.44	-9.21	37.23	43.50	-6.27
288.020	Peak	48.69	-8.79	39.90	46.00	-6.10
360.043	Peak	48.84	-7.18	41.67	46.00	-4.33
539.978	Peak	42.01	-2.85	39.15	46.00	-6.85
874.991	Peak	36.60	2.57	39.17	46.00	-6.83

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :E1
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

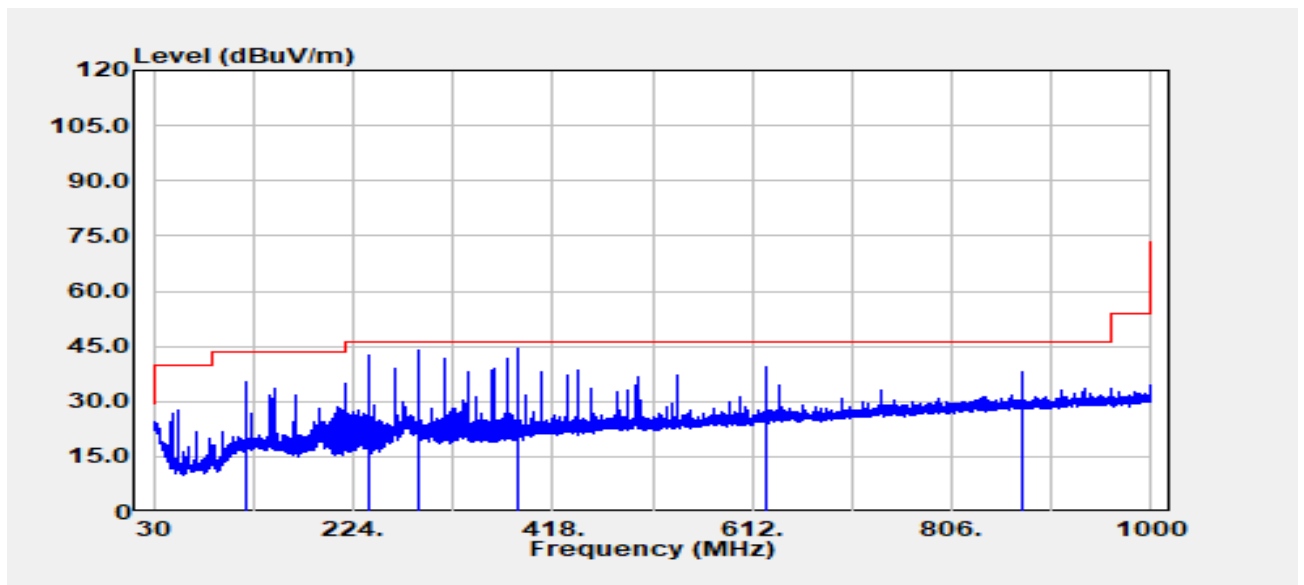

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
119.968	Peak	44.68	-9.21	35.47	43.50	-8.03
240.005	Peak	53.26	-10.75	42.51	46.00	-3.49
288.020	Peak	52.80	-8.79	44.01	46.00	-1.99
384.050	Peak	50.88	-6.48	44.40	46.00	-1.60
624.974	Peak	40.66	-1.16	39.50	46.00	-6.50
874.991	Peak	35.65	2.57	38.22	46.00	-7.78

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E1
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

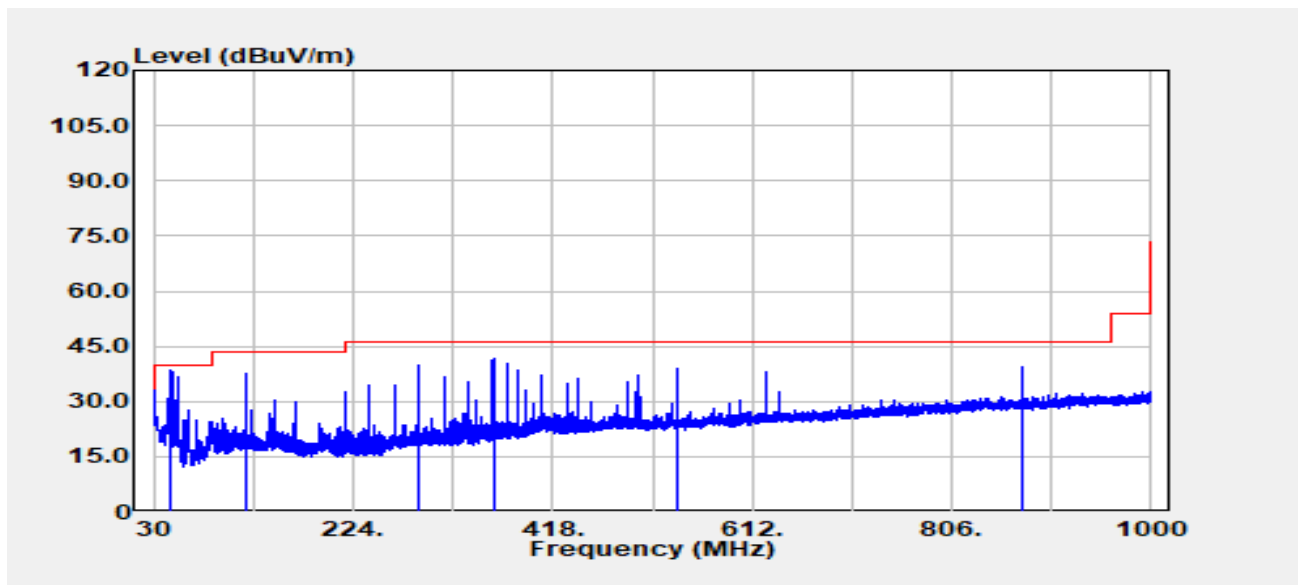


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
46.611	Peak	52.60	-14.25	38.36	40.00	-1.64
119.968	Peak	46.85	-9.21	37.64	43.50	-5.86
288.020	Peak	48.61	-8.79	39.82	46.00	-6.18
360.043	Peak	48.88	-7.18	41.70	46.00	-4.30
539.978	Peak	41.86	-2.85	39.01	46.00	-6.99
874.991	Peak	36.81	2.57	39.38	46.00	-6.62

Report No.: TMWK2308002691KR

Page 207 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E1
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

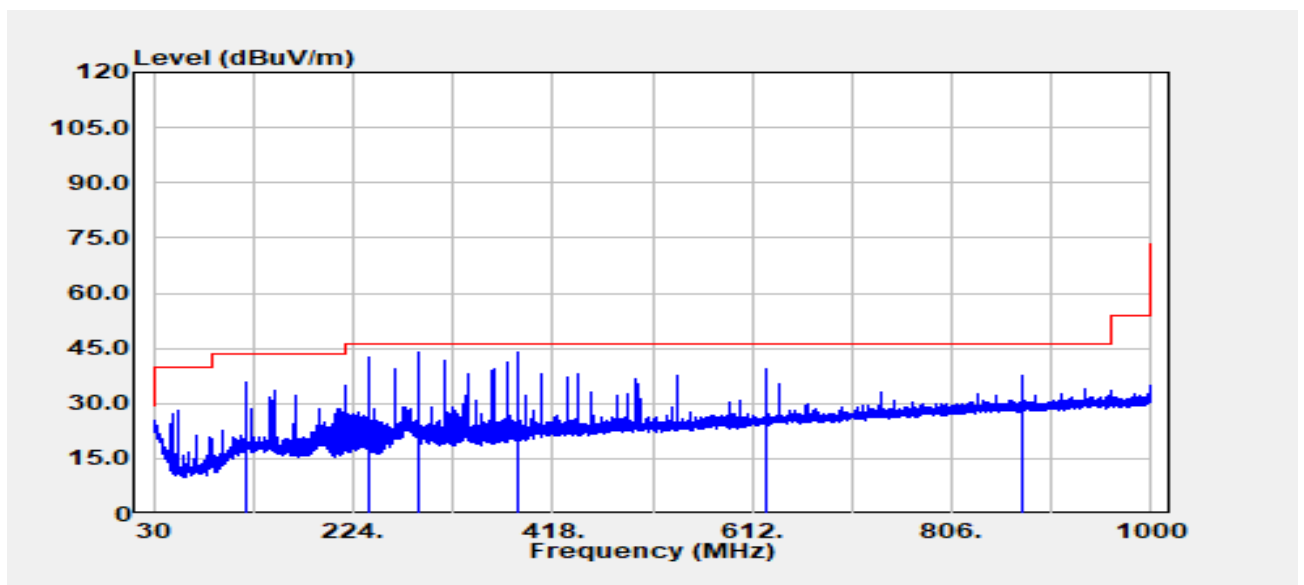

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
119.968	Peak	44.83	-9.21	35.62	43.50	-7.88
240.005	Peak	53.23	-10.75	42.48	46.00	-3.52
288.020	Peak	52.79	-8.79	44.00	46.00	-2.00
384.050	Peak	50.42	-6.48	43.94	46.00	-2.06
624.974	Peak	40.54	-1.16	39.38	46.00	-6.62
874.991	Peak	34.82	2.57	37.39	46.00	-8.61

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E1
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

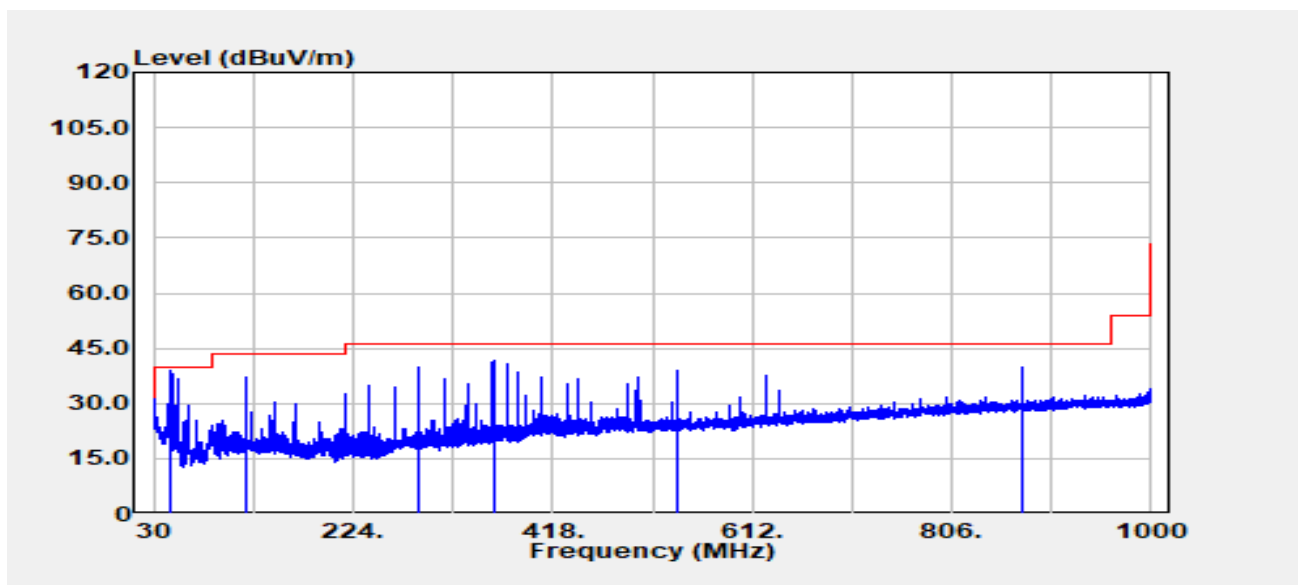

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
46.369	Peak	52.78	-14.03	38.76	40.00	-1.24
119.968	Peak	46.39	-9.21	37.18	43.50	-6.32
288.020	Peak	48.54	-8.79	39.75	46.00	-6.25
360.043	Peak	48.69	-7.18	41.52	46.00	-4.48
539.978	Peak	41.96	-2.85	39.11	46.00	-6.89
874.991	Peak	37.11	2.57	39.68	46.00	-6.32

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E1
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

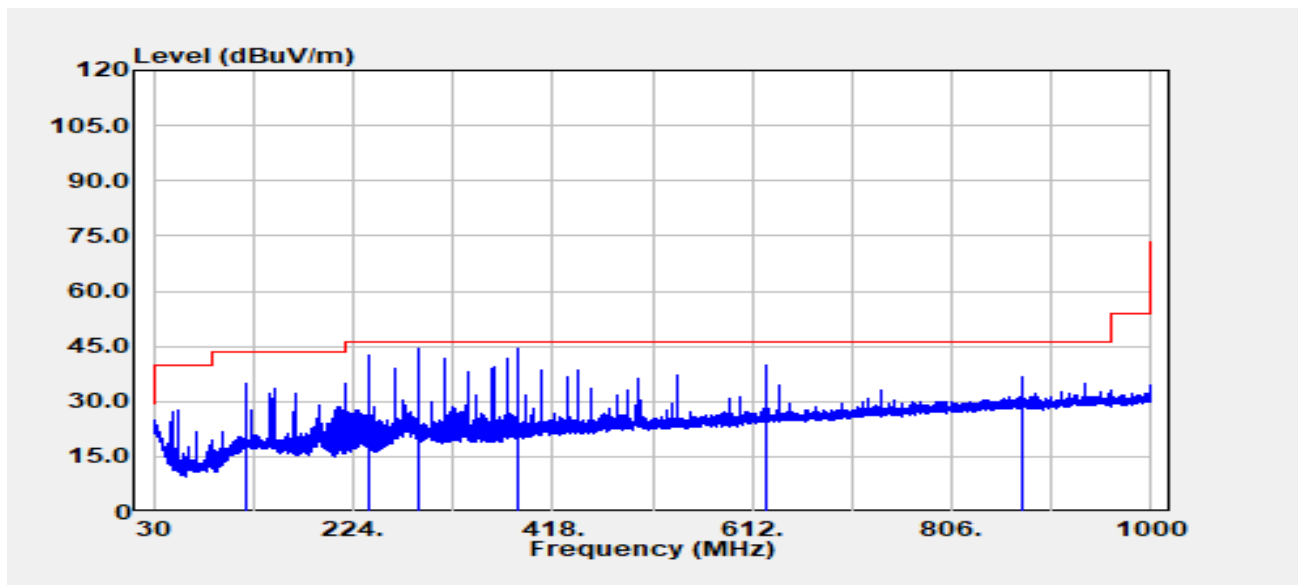

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
119.968	Peak	44.17	-9.21	34.96	43.50	-8.54
240.005	Peak	53.49	-10.75	42.74	46.00	-3.26
288.020	Peak	52.99	-8.79	44.20	46.00	-1.80
384.050	Peak	50.74	-6.48	44.27	46.00	-1.73
624.974	Peak	40.90	-1.16	39.74	46.00	-6.26
874.991	Peak	34.17	2.57	36.74	46.00	-9.26

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E1
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

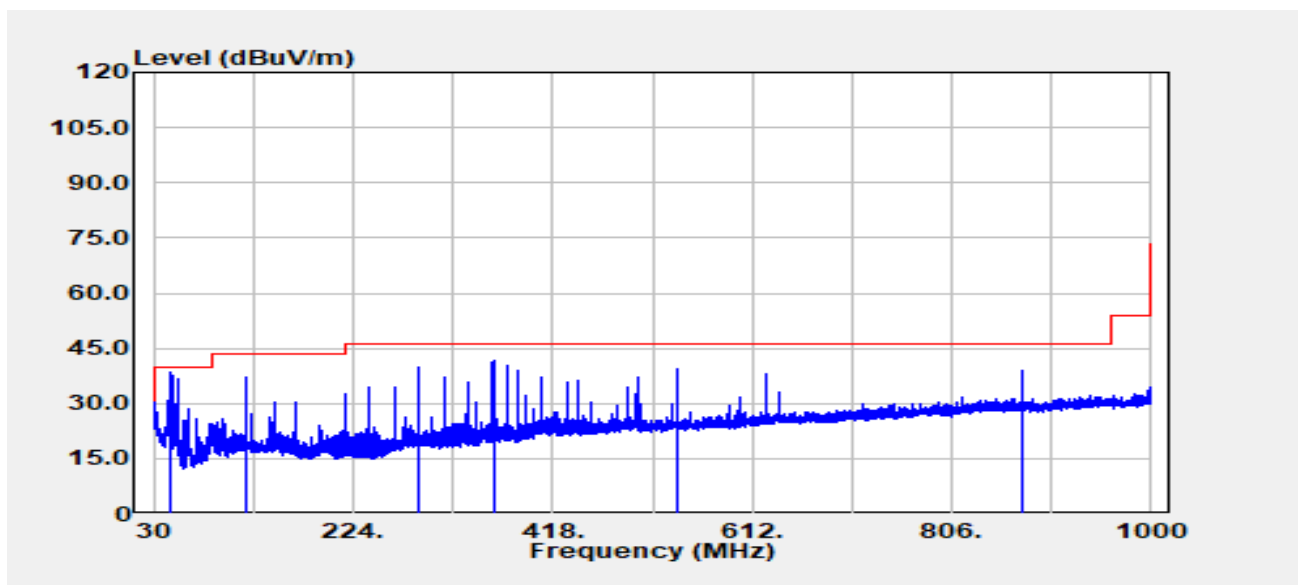

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
46.611	Peak	52.65	-14.25	38.40	40.00	-1.60
119.968	Peak	46.51	-9.21	37.30	43.50	-6.20
288.020	Peak	48.71	-8.79	39.93	46.00	-6.07
360.043	Peak	48.72	-7.18	41.54	46.00	-4.46
539.978	Peak	42.02	-2.85	39.17	46.00	-6.83
874.991	Peak	36.37	2.57	38.94	46.00	-7.06

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E1
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

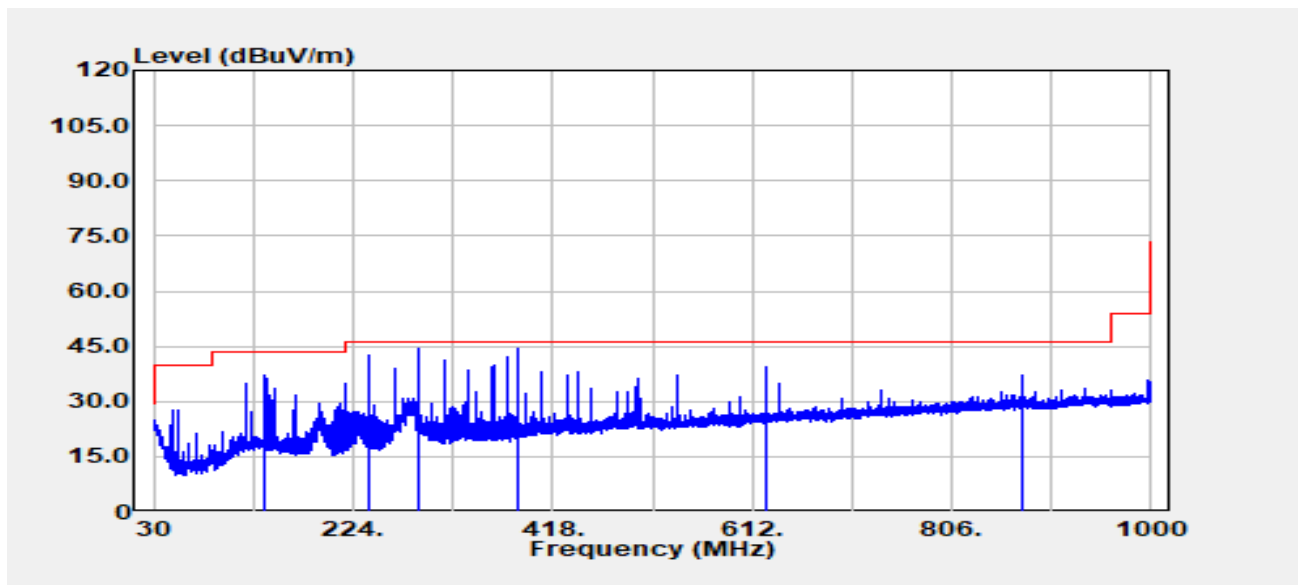

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
138.883	Peak	46.80	-9.86	36.94	43.50	-6.56
240.005	Peak	53.52	-10.75	42.77	46.00	-3.23
288.020	Peak	53.09	-8.79	44.30	46.00	-1.70
384.050	Peak	50.63	-6.48	44.15	46.00	-1.85
624.974	Peak	40.70	-1.16	39.53	46.00	-6.47
874.991	Peak	34.71	2.57	37.28	46.00	-8.72

TX Test Data: (FCC_Above 1GHz)

Project Number	:TM-2308000057P	Test Date	:2023-08-30
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/58
Frequency	:5180 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony.Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

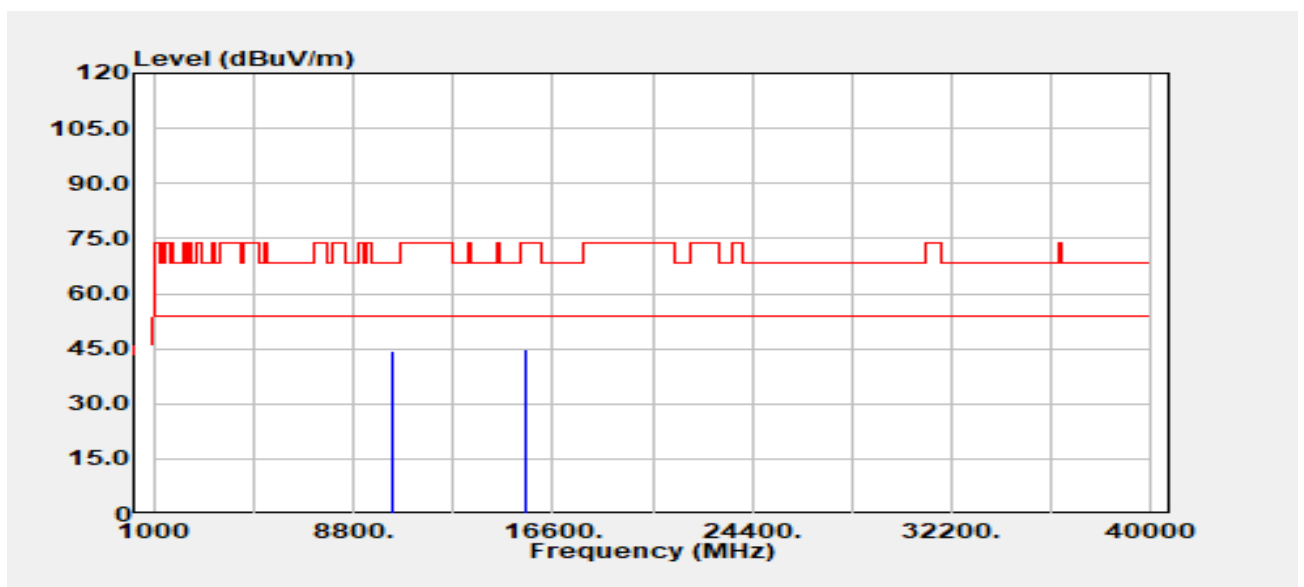


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.000	Peak	33.32	11.26	44.58	68.20	-23.62
15540.000	Peak	32.41	12.38	44.79	74.00	-29.21
15540.000	Average	23.30	12.38	35.68	54.00	-18.32

Report No.: TMWK2308002691KR

Page 213 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

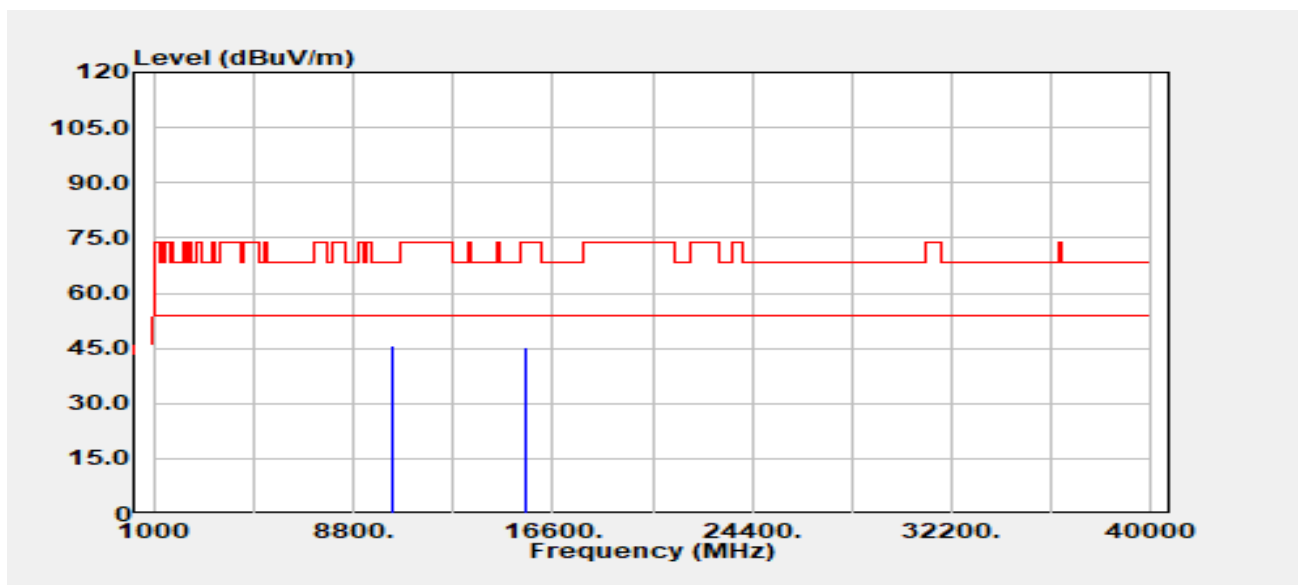


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.000	Peak	34.66	11.26	45.93	68.20	-22.27
15540.000	Peak	32.77	12.38	45.15	74.00	-28.85
15540.000	Average	22.87	12.38	35.25	54.00	-18.75

Report No.: TMWK2308002691KR

Page 214 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

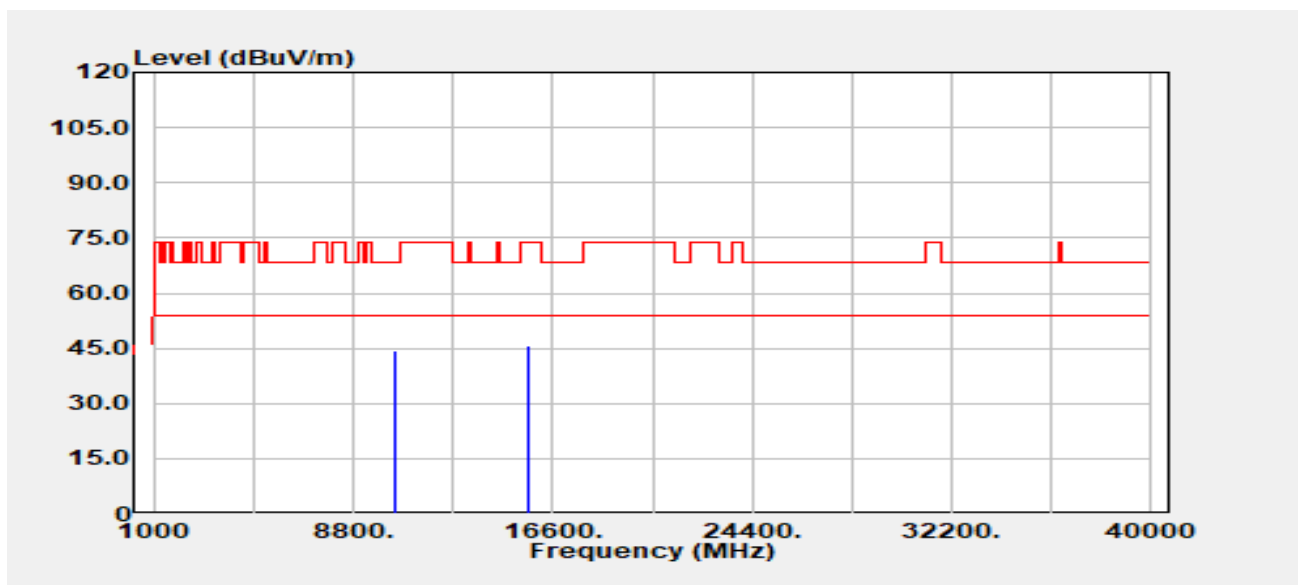


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10440.000	Peak	33.35	11.25	44.60	68.20	-23.60
15660.000	Peak	31.99	13.53	45.52	74.00	-28.48
15660.000	Average	22.78	13.53	36.31	54.00	-17.69

Report No.: TMWK2308002691KR

Page 215 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

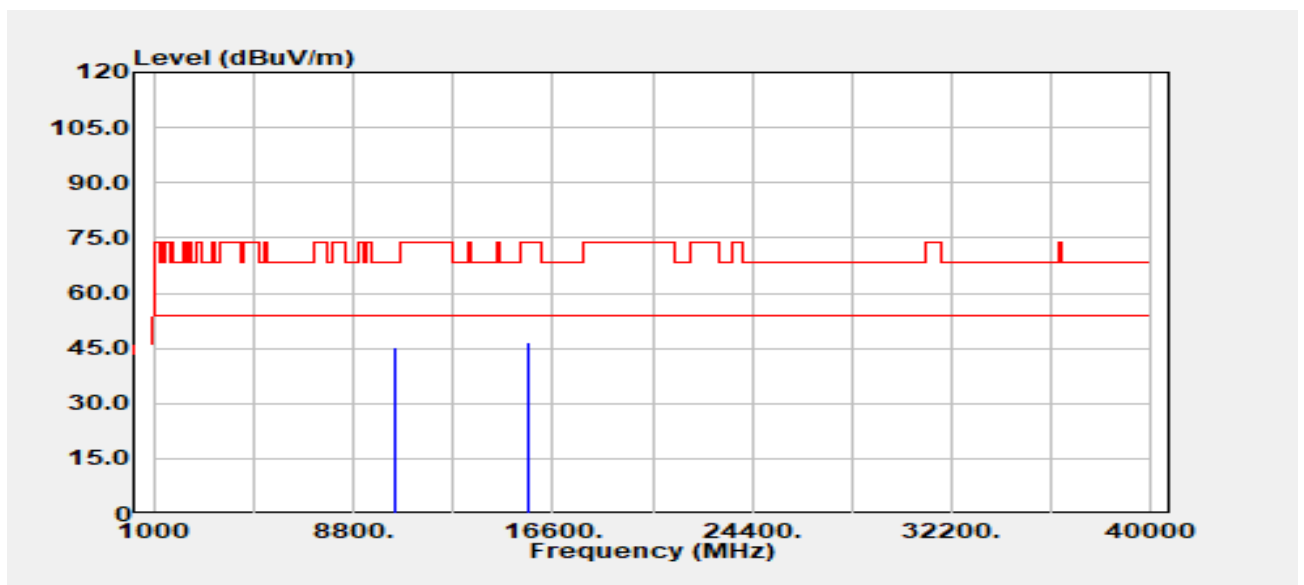


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.000	Peak	33.90	11.25	45.15	68.20	-23.05
15660.000	Peak	33.18	13.53	46.71	74.00	-27.29
15660.000	Average	22.76	13.53	36.29	54.00	-17.71

Report No.: TMWK2308002691KR

Page 216 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

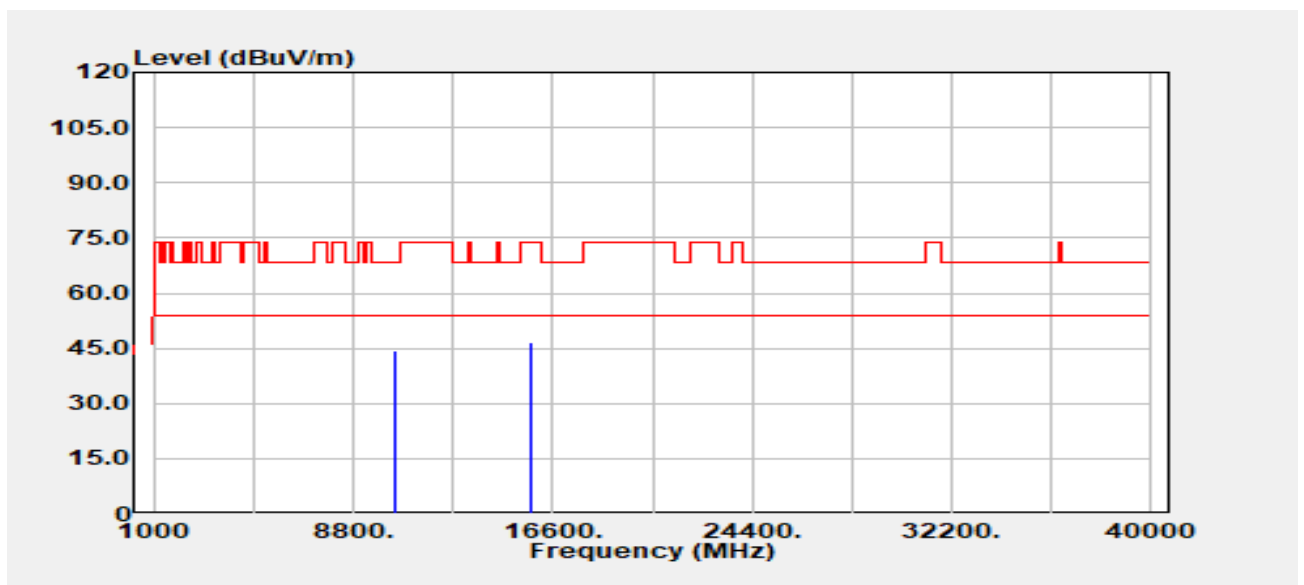


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.000	Peak	33.23	11.35	44.58	68.20	-23.62
15720.000	Peak	32.70	14.11	46.81	74.00	-27.19
15720.000	Average	22.97	14.11	37.08	54.00	-16.92

Report No.: TMWK2308002691KR

Page 217 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

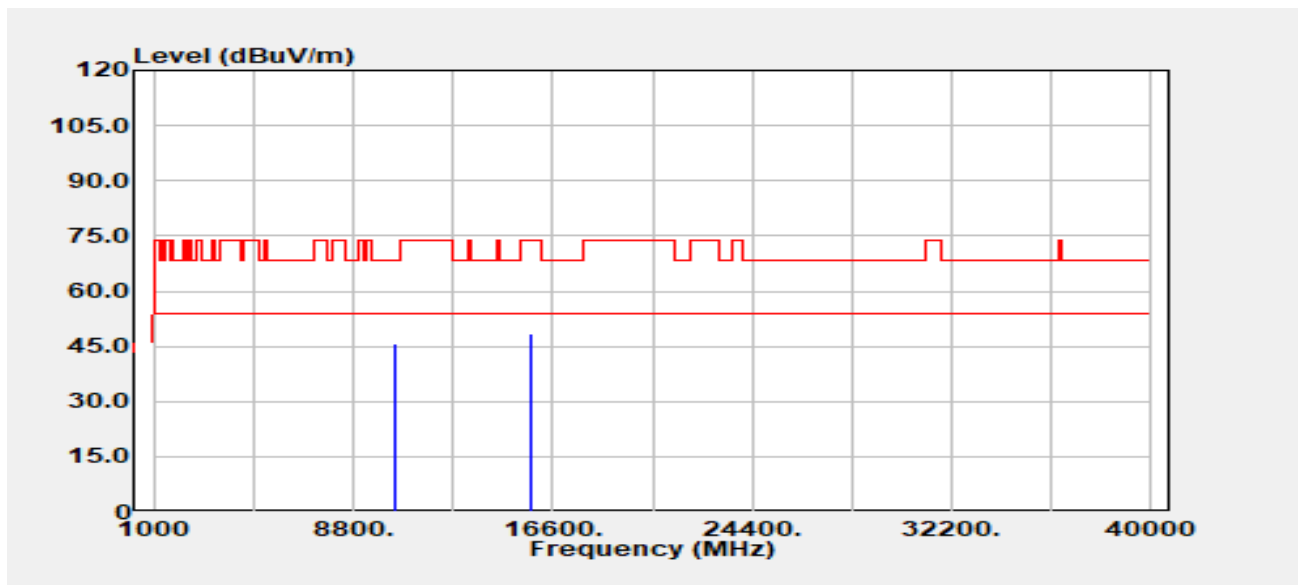


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.000	Peak	34.23	11.35	45.58	68.20	-22.62
15720.000	Peak	34.26	14.11	48.37	74.00	-25.63
15720.000	Average	23.07	14.11	37.18	54.00	-16.82

Report No.: TMWK2308002691KR

Page 218 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

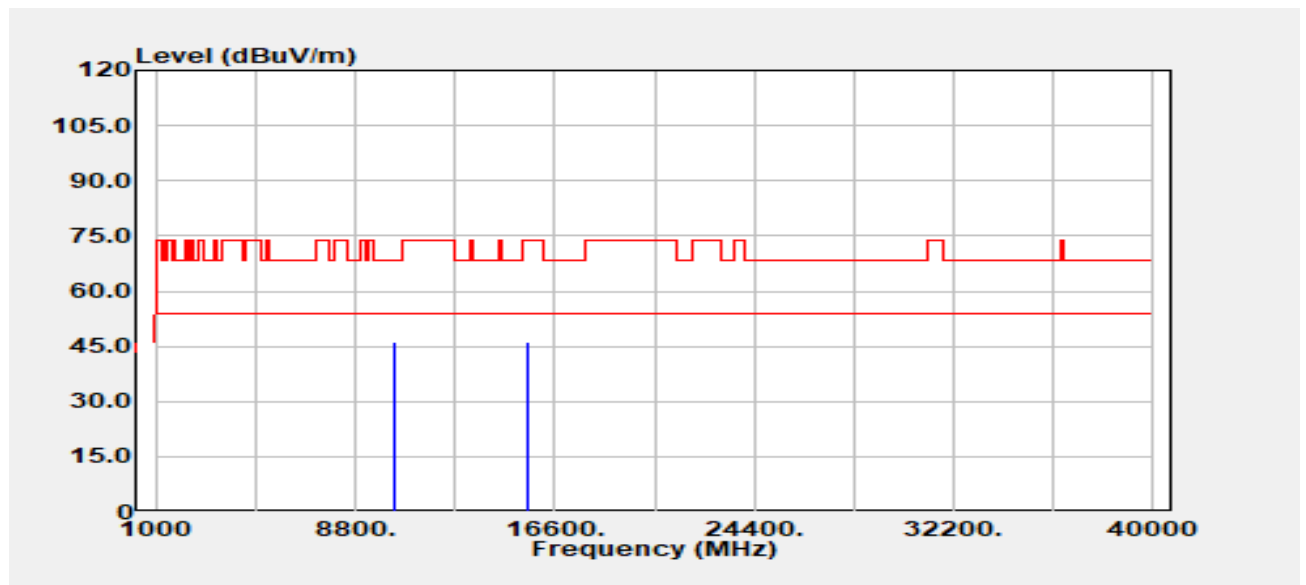


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.000	Peak	34.73	11.26	45.99	68.20	-22.21
15540.000	Peak	33.71	12.38	46.09	74.00	-27.91
15540.000	Average	22.95	12.38	35.33	54.00	-18.67

Report No.: TMWK2308002691KR

Page 219 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

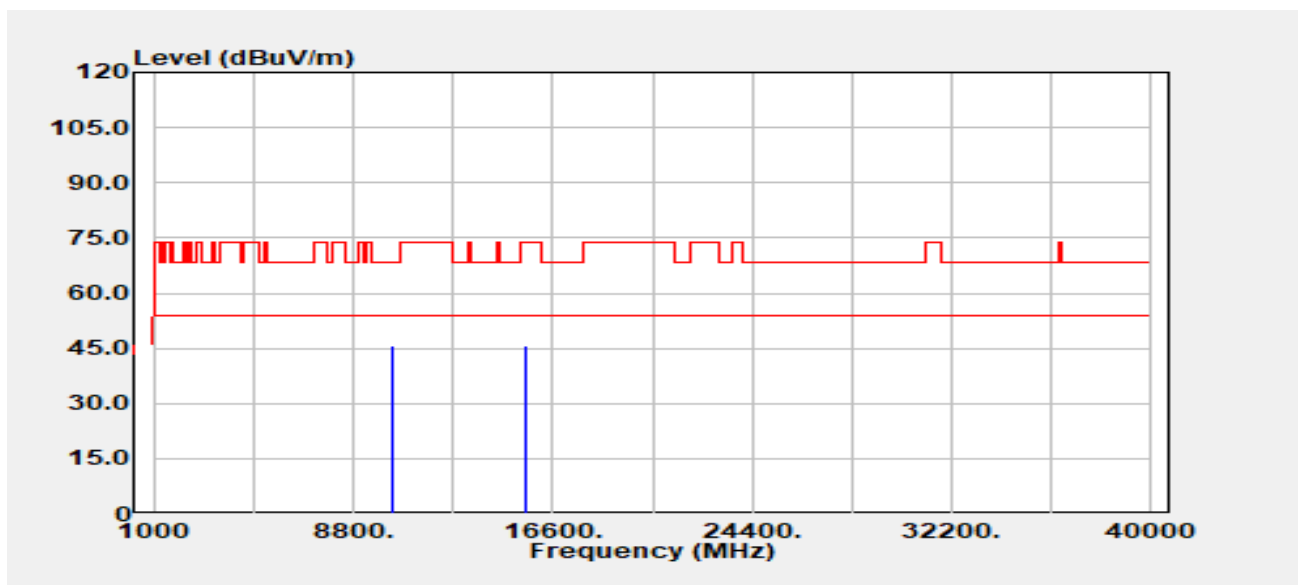

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.000	Peak	34.63	11.26	45.89	68.20	-22.31
15540.000	Peak	33.18	12.38	45.56	74.00	-28.44
15540.000	Average	22.79	12.38	35.16	54.00	-18.84

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

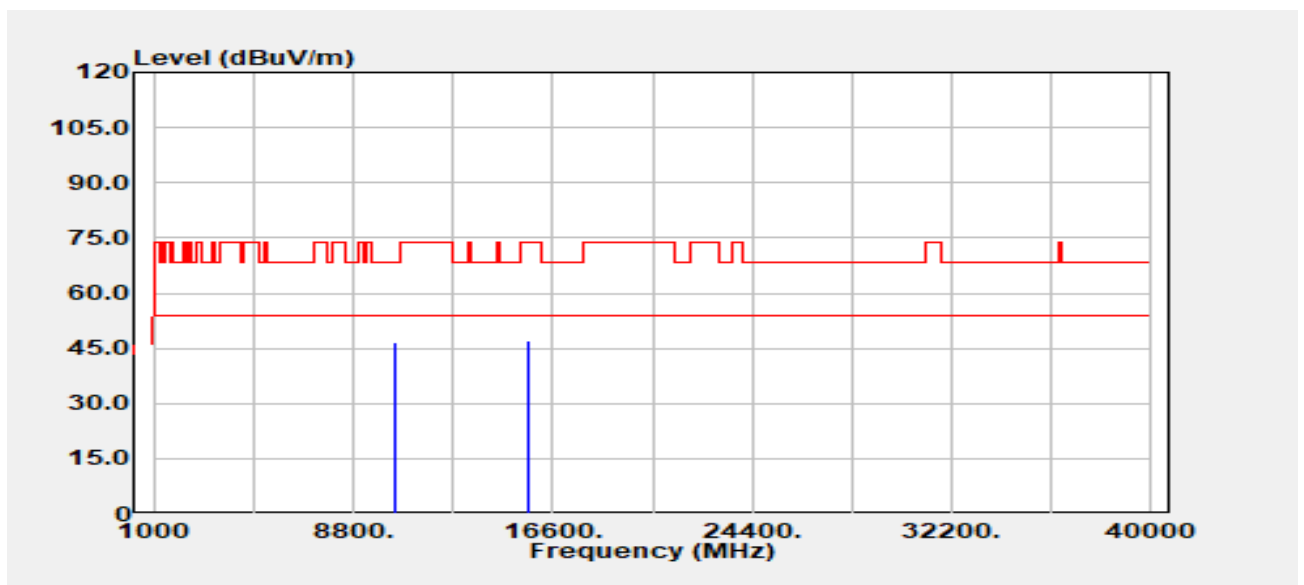


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.000	Peak	35.36	11.25	46.61	68.20	-21.59
15660.000	Peak	33.38	13.53	46.90	74.00	-27.10
15660.000	Average	22.99	13.53	36.52	54.00	-17.48

Report No.: TMWK2308002691KR

Page 221 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

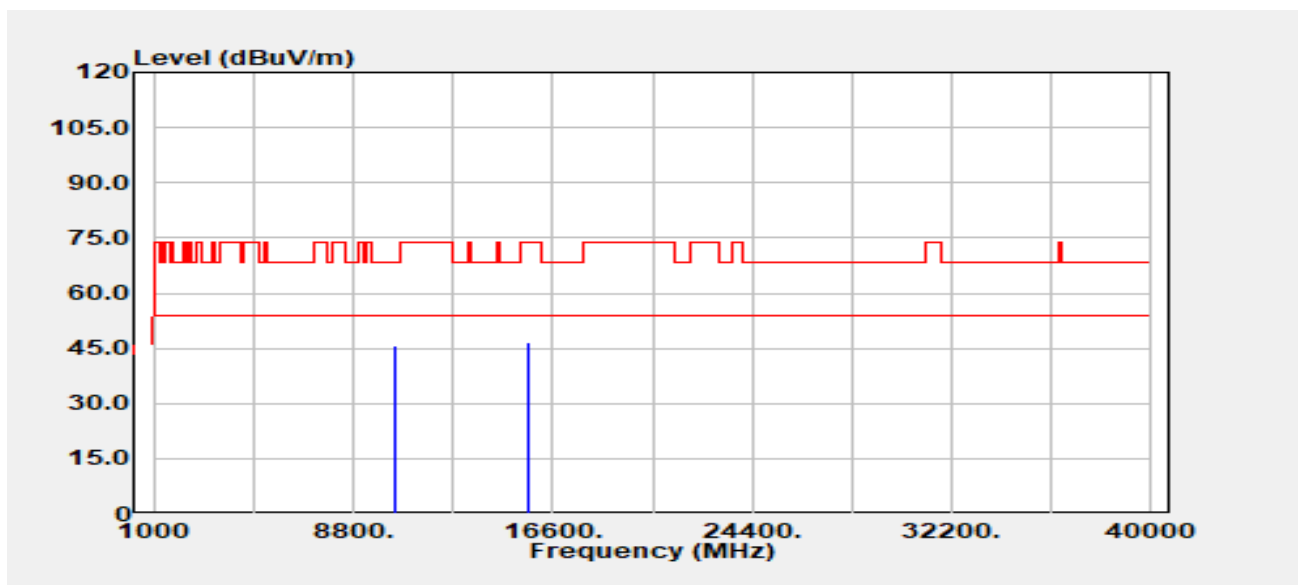


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.000	Peak	34.47	11.25	45.72	68.20	-22.48
15660.000	Peak	33.27	13.53	46.79	74.00	-27.21
15660.000	Average	23.09	13.53	36.61	54.00	-17.39

Report No.: TMWK2308002691KR

Page 222 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

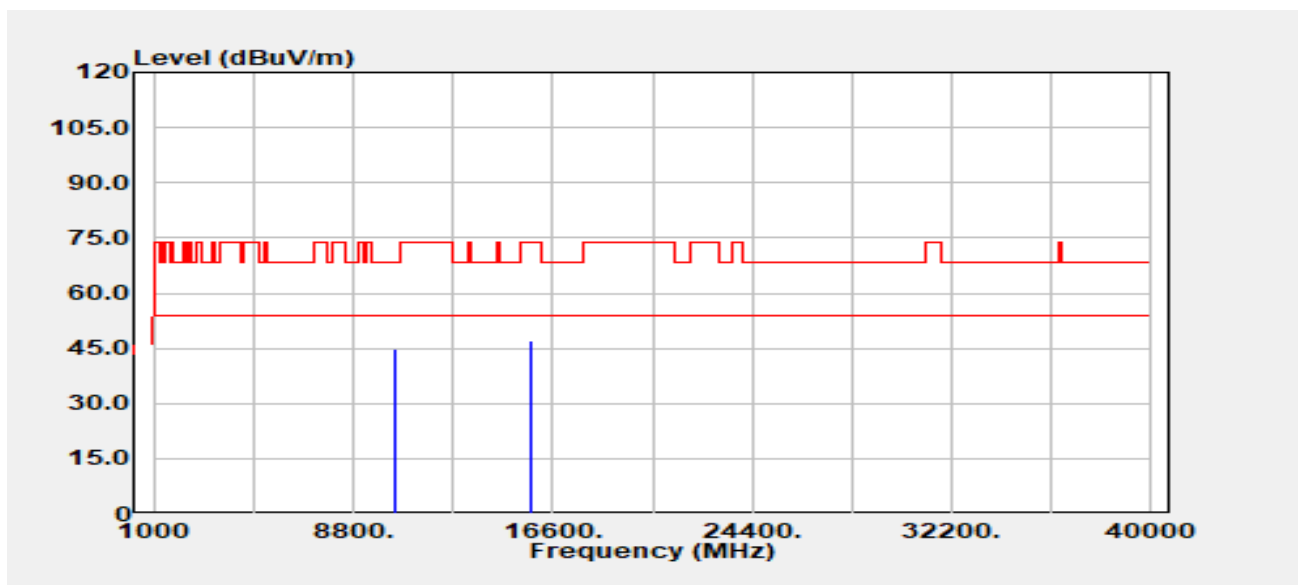


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.000	Peak	33.69	11.35	45.04	68.20	-23.16
15720.000	Peak	33.12	14.11	47.23	74.00	-26.77
15720.000	Average	22.72	14.11	36.83	54.00	-17.17

Report No.: TMWK2308002691KR

Page 223 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

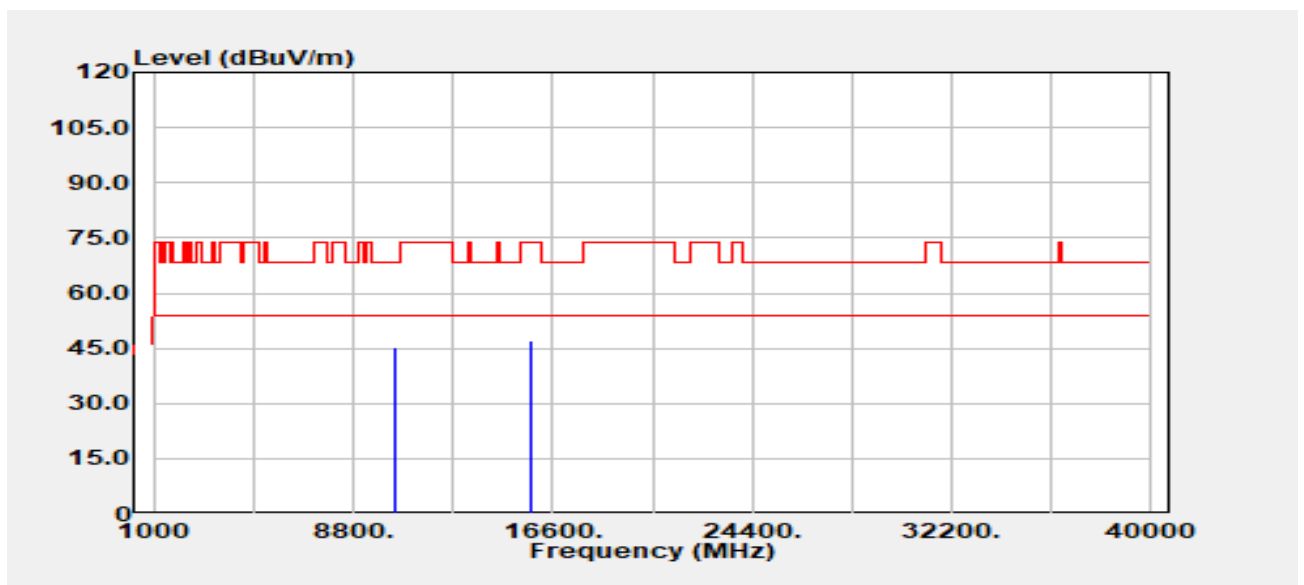


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.000	Peak	34.11	11.35	45.46	68.20	-22.74
15720.000	Peak	32.90	14.11	47.01	74.00	-26.99
15720.000	Average	22.63	14.11	36.74	54.00	-17.26

Report No.: TMWK2308002691KR

Page 224 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

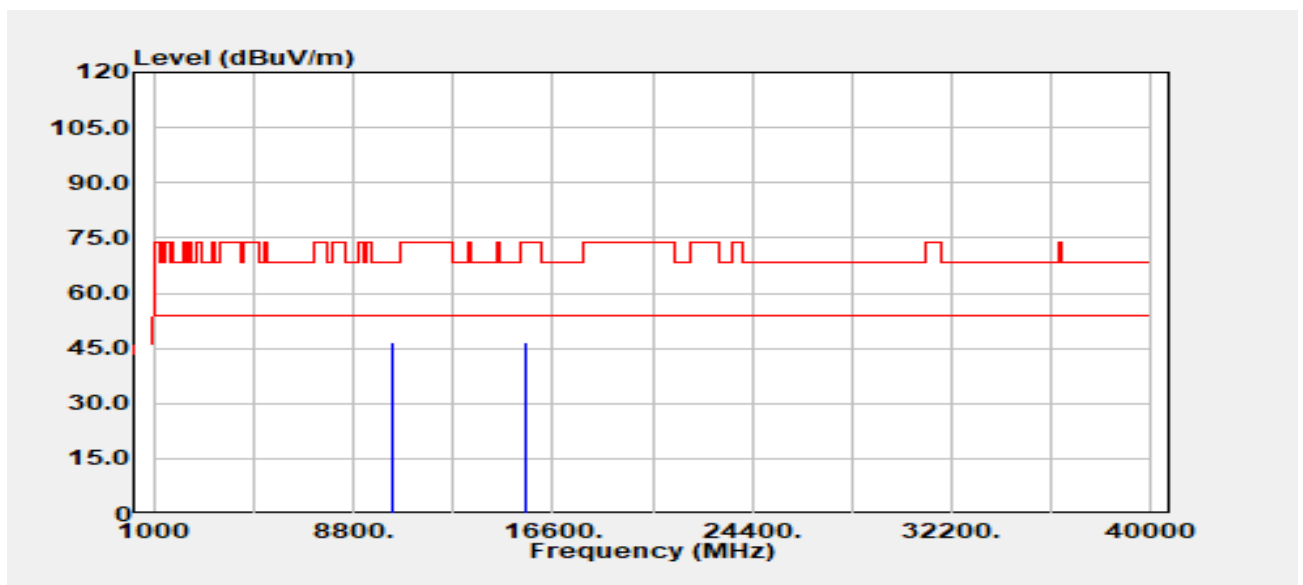


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.000	Peak	35.39	11.22	46.61	68.20	-21.59
15570.000	Peak	34.36	12.41	46.77	74.00	-27.23
15570.000	Average	24.64	12.41	37.05	54.00	-16.95

Report No.: TMWK2308002691KR

Page 225 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

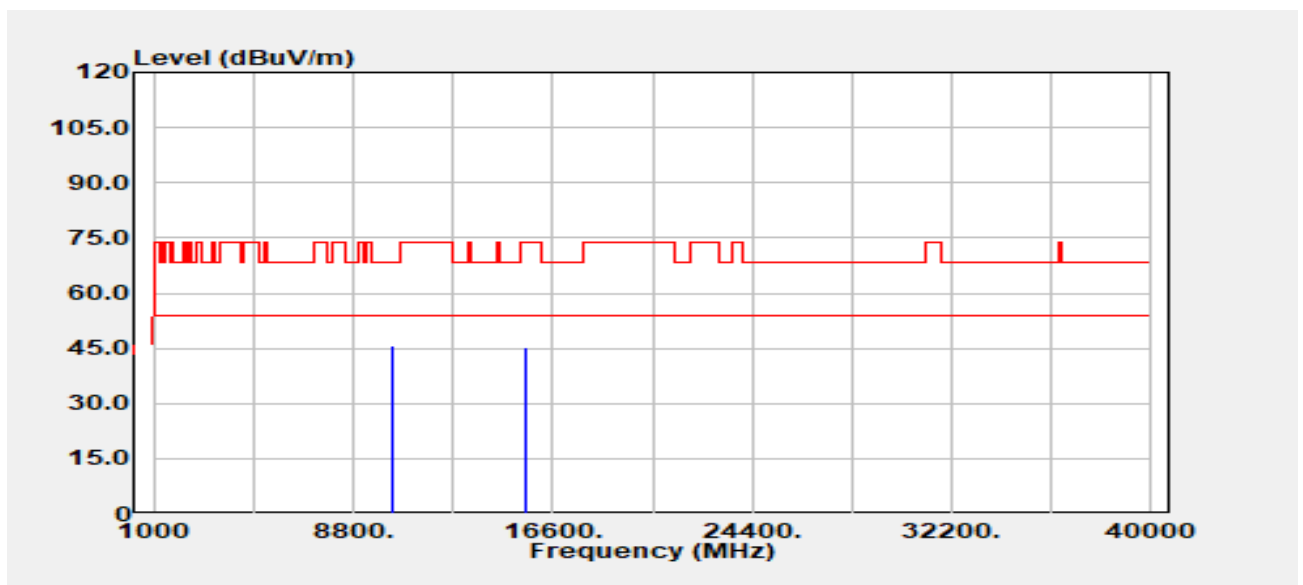


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.000	Peak	34.67	11.22	45.88	68.20	-22.32
15570.000	Peak	33.04	12.41	45.46	74.00	-28.54
15570.000	Average	24.70	12.41	37.11	54.00	-16.89

Report No.: TMWK2308002691KR

Page 226 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5230 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

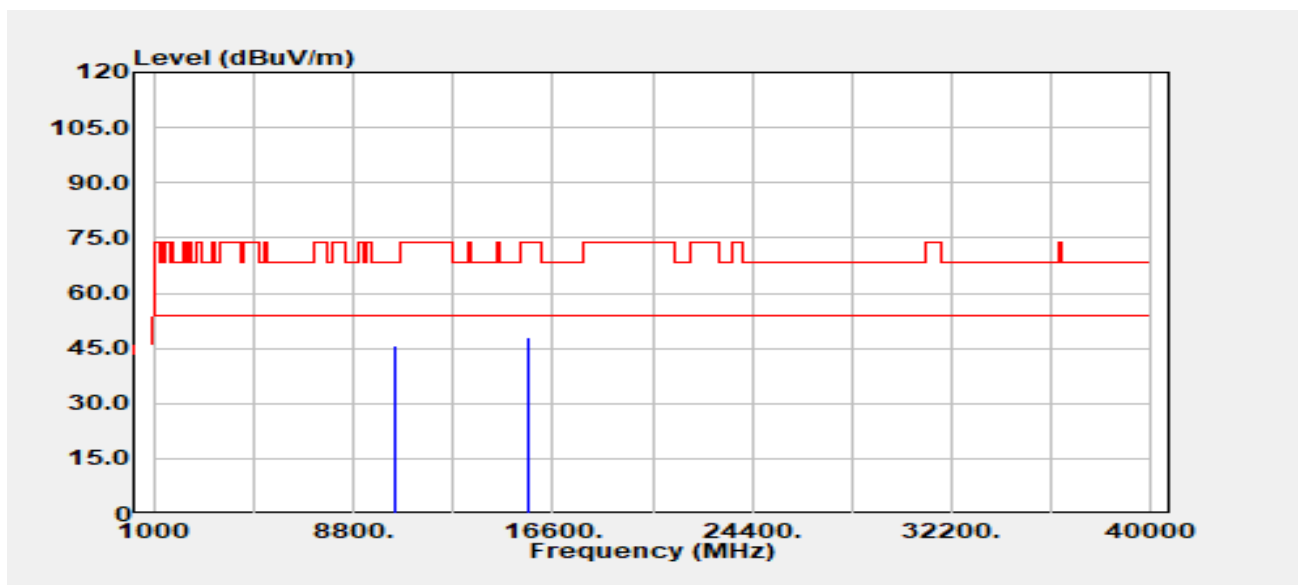


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.000	Peak	34.42	11.30	45.72	68.20	-22.48
15690.000	Peak	34.08	13.90	47.98	74.00	-26.02
15690.000	Average	24.58	13.90	38.48	54.00	-15.52

Report No.: TMWK2308002691KR

Page 227 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5230 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

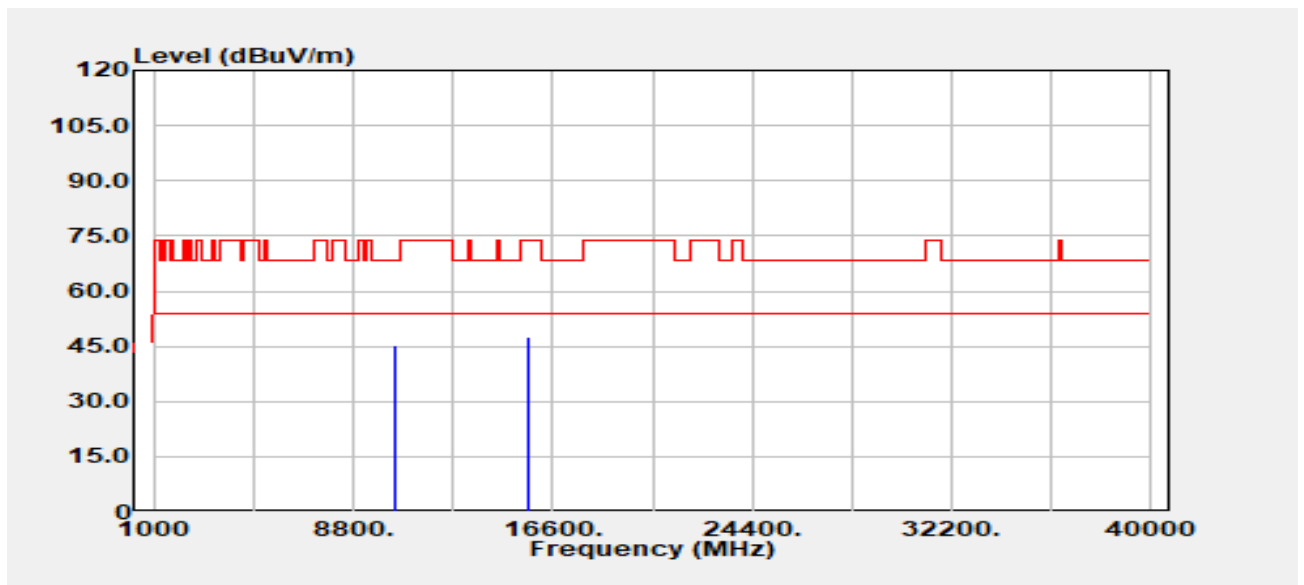


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.000	Peak	33.88	11.30	45.18	68.20	-23.02
15690.000	Peak	33.80	13.90	47.70	74.00	-26.30
15690.000	Average	24.68	13.90	38.58	54.00	-15.42

Report No.: TMWK2308002691KR

Page 228 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

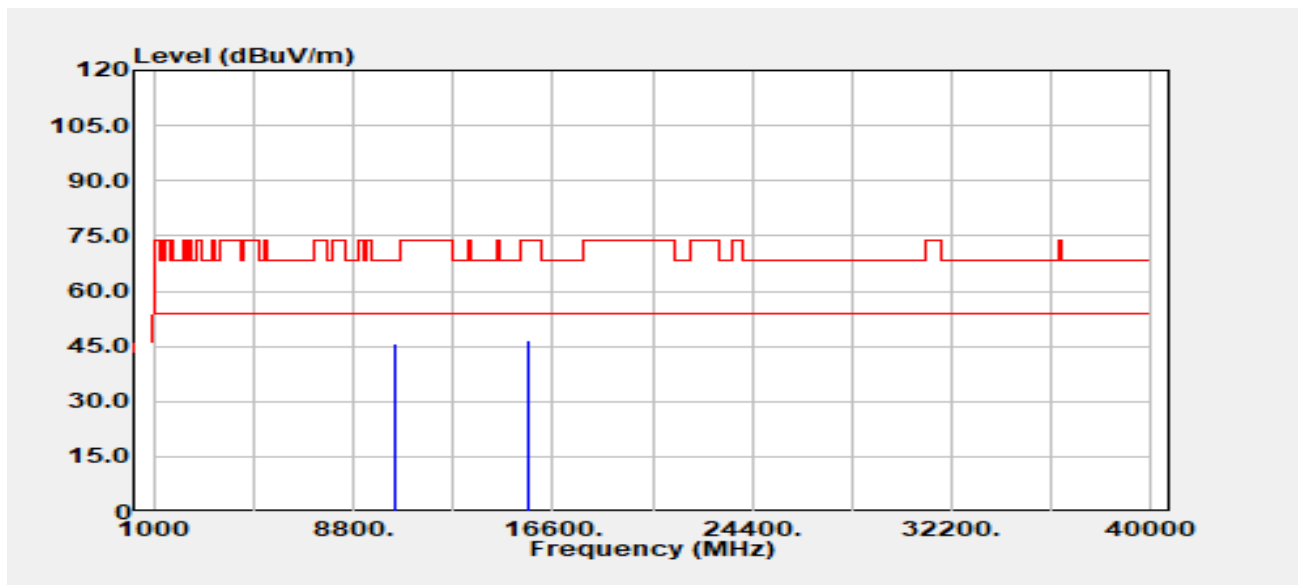


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.000	Peak	34.41	11.21	45.62	68.20	-22.58
15630.000	Peak	33.38	13.06	46.44	74.00	-27.56
15630.000	Average	24.50	13.06	37.56	54.00	-16.44

Report No.: TMWK2308002691KR

Page 229 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

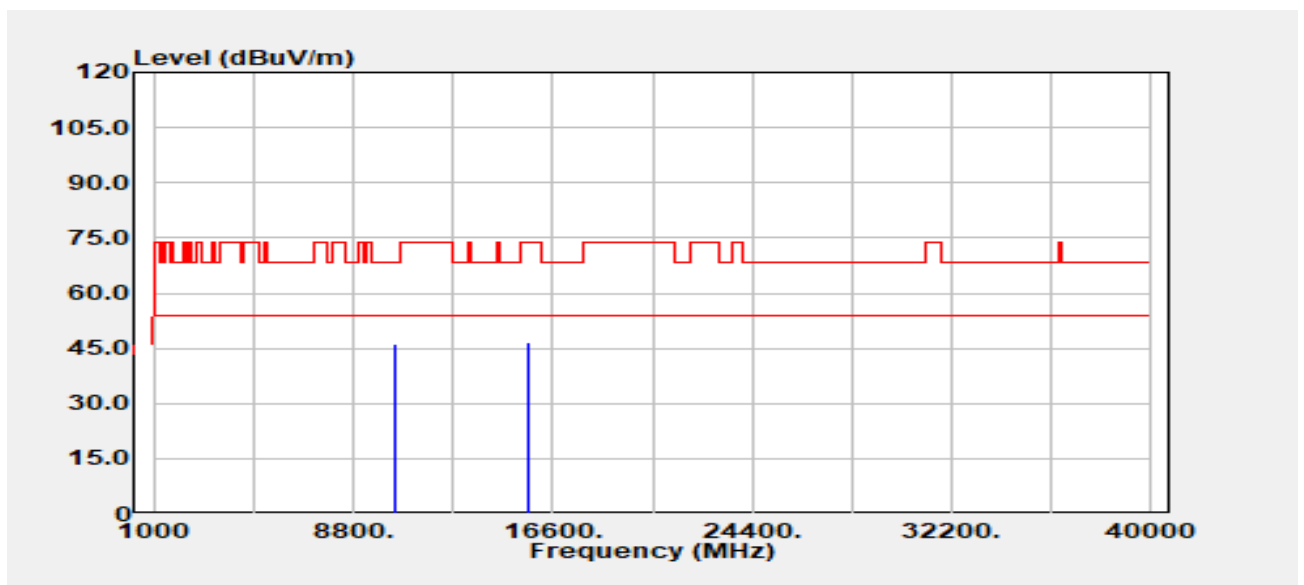


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.000	Peak	35.06	11.21	46.27	68.20	-21.93
15630.000	Peak	33.50	13.06	46.55	74.00	-27.45
15630.000	Average	24.54	13.06	37.60	54.00	-16.40

Report No.: TMWK2308002691KR

Page 230 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

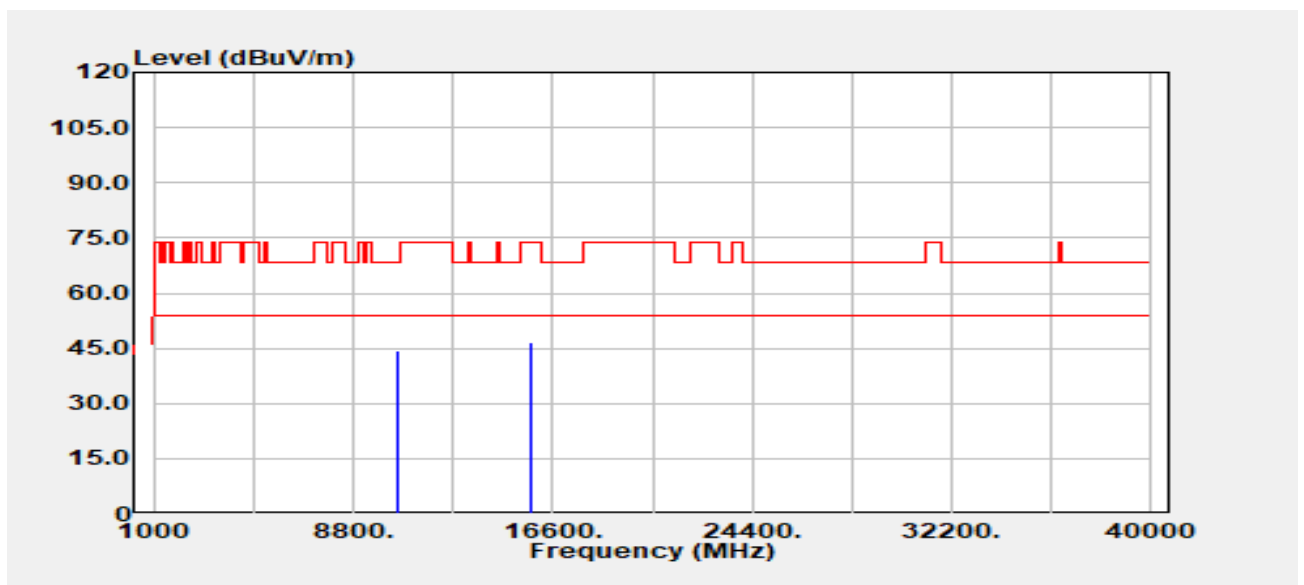


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.000	Peak	32.82	11.41	44.23	68.20	-23.97
15780.000	Peak	32.61	14.08	46.68	74.00	-27.32
15780.000	Average	23.00	14.08	37.08	54.00	-16.92

Report No.: TMWK2308002691KR

Page 231 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

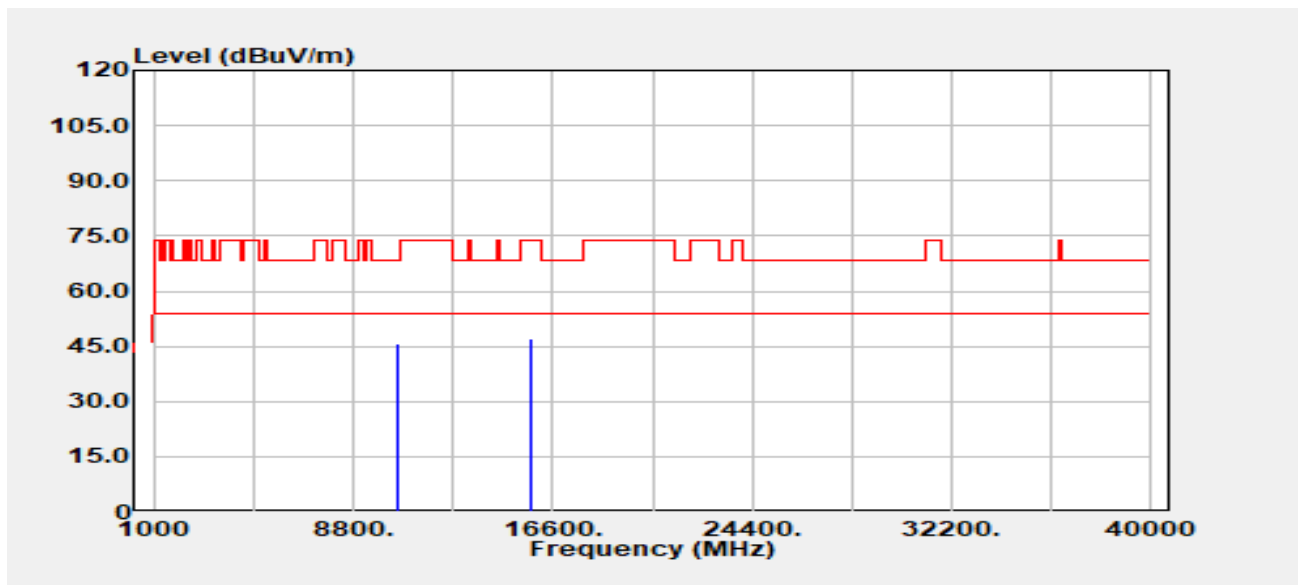


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.000	Peak	34.17	11.41	45.58	68.20	-22.62
15780.000	Peak	33.16	14.08	47.23	74.00	-26.77
15780.000	Average	22.93	14.08	37.00	54.00	-17.00

Report No.: TMWK2308002691KR

Page 232 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

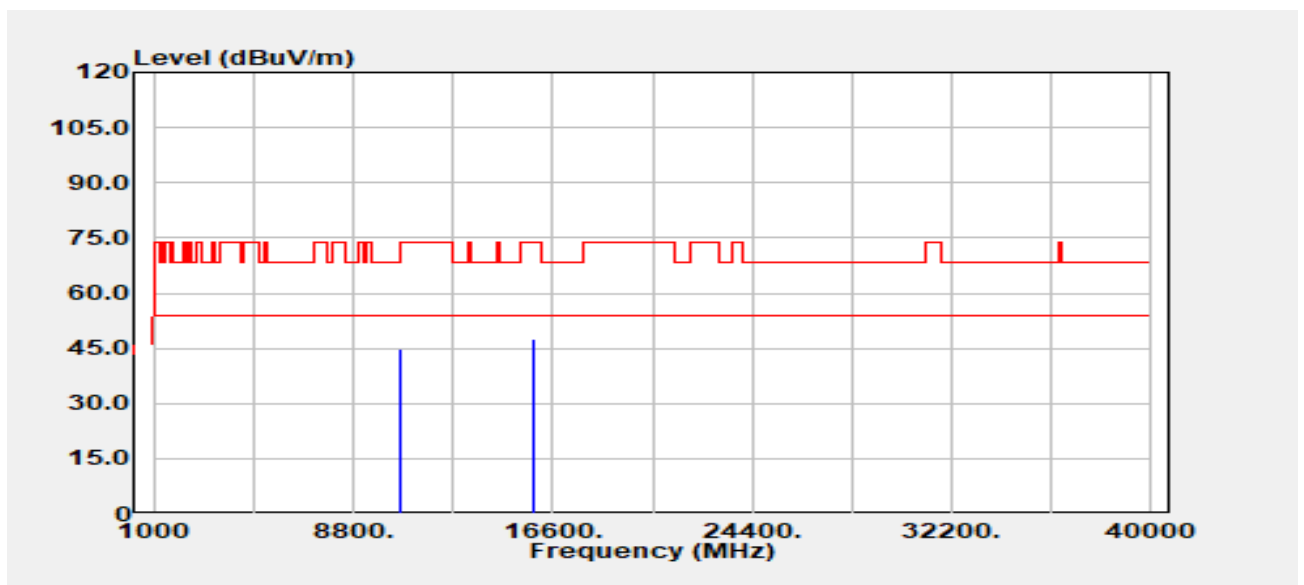


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.000	Peak	33.28	11.53	44.81	68.20	-23.39
15900.000	Peak	33.18	14.45	47.63	74.00	-26.37
15900.000	Average	23.58	14.45	38.03	54.00	-15.97

Report No.: TMWK2308002691KR

Page 233 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

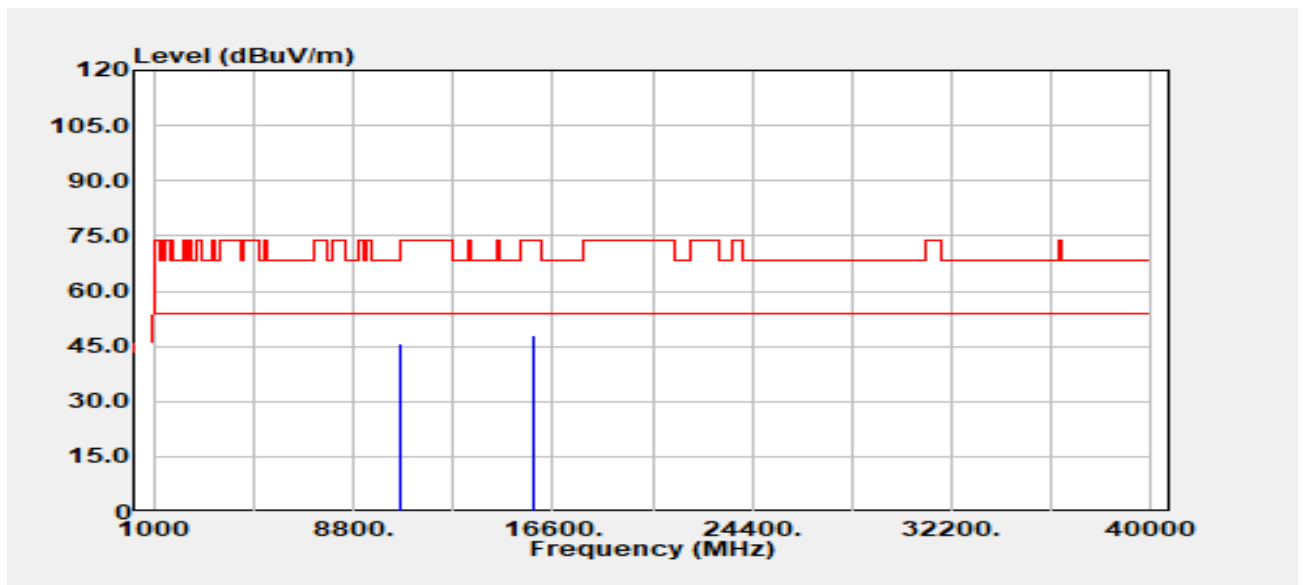


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.000	Peak	34.20	11.53	45.73	68.20	-22.47
15900.000	Peak	33.47	14.45	47.92	74.00	-26.08
15900.000	Average	23.59	14.45	38.04	54.00	-15.96

Report No.: TMWK2308002691KR

Page 234 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

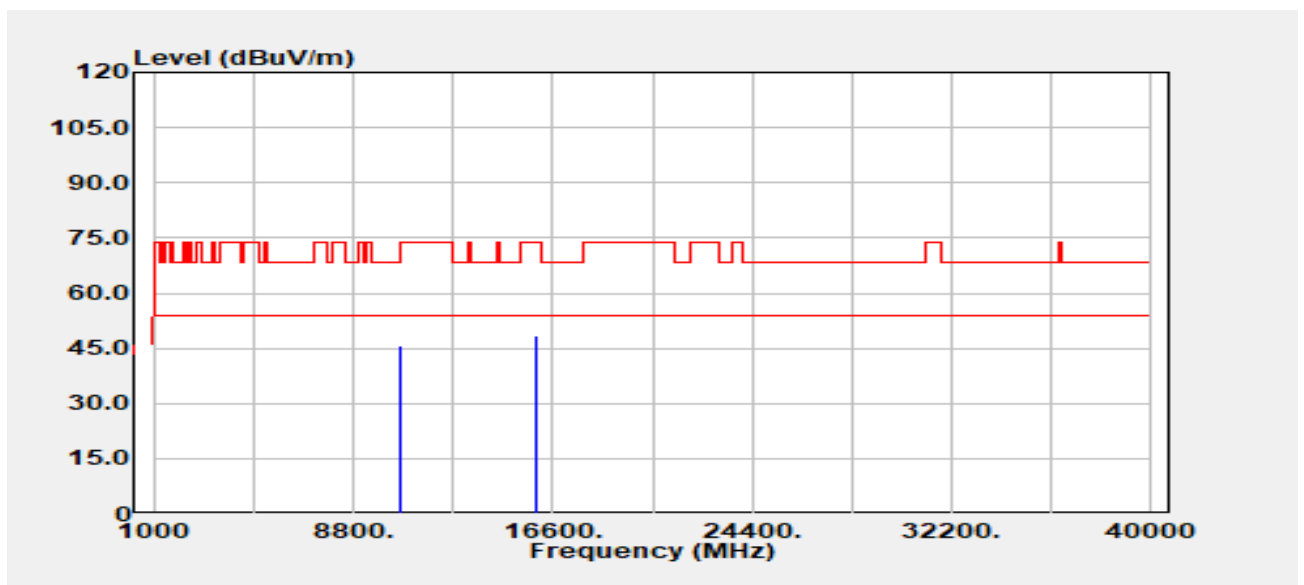


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.000	Peak	34.16	11.50	45.66	74.00	-28.34
10640.000	Average	23.93	11.50	35.44	54.00	-18.56
15960.000	Peak	33.33	15.09	48.42	74.00	-25.58
15960.000	Average	23.04	15.09	38.13	54.00	-15.87

Report No.: TMWK2308002691KR

Page 235 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

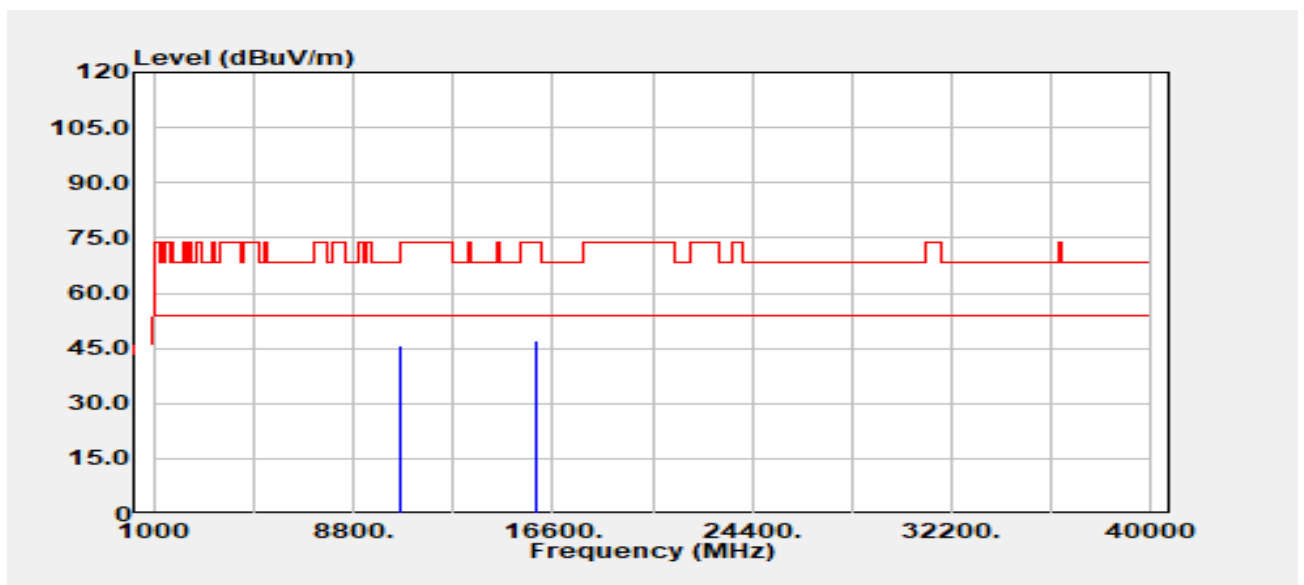


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.000	Peak	34.15	11.50	45.65	74.00	-28.35
10640.000	Average	23.90	11.50	35.41	54.00	-18.59
15960.000	Peak	32.22	15.09	47.31	74.00	-26.69
15960.000	Average	23.11	15.09	38.20	54.00	-15.80

Report No.: TMWK2308002691KR

Page 236 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

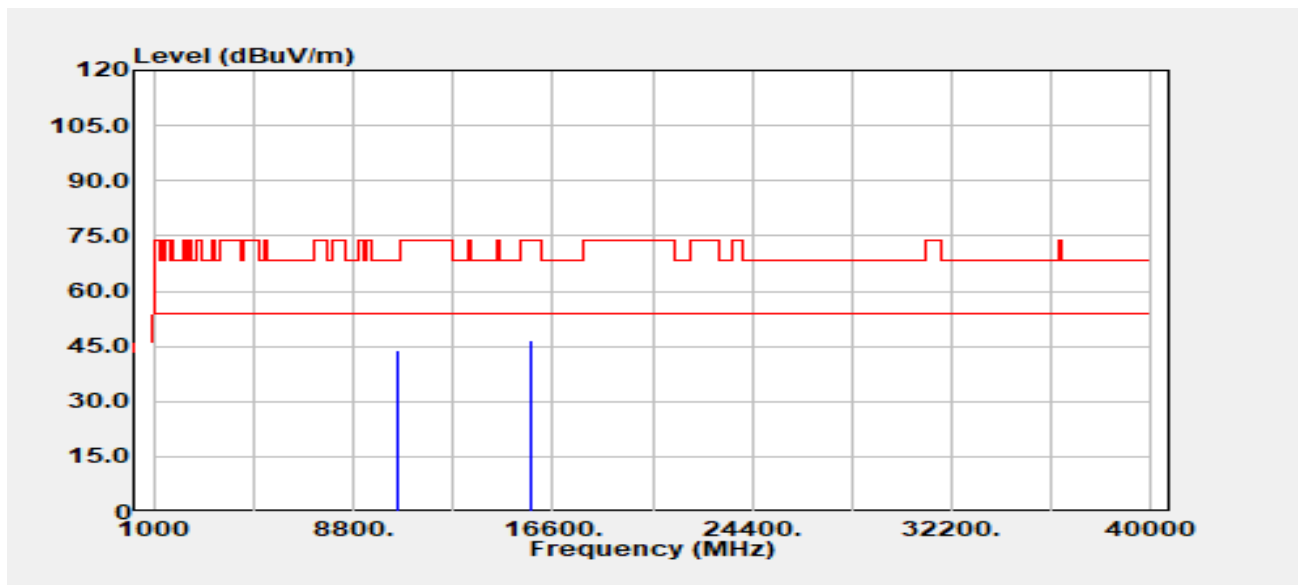


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.000	Peak	32.72	11.41	44.13	68.20	-24.07
15780.000	Peak	32.63	14.08	46.70	74.00	-27.30
15780.000	Average	22.72	14.08	36.79	54.00	-17.21

Report No.: TMWK2308002691KR

Page 237 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

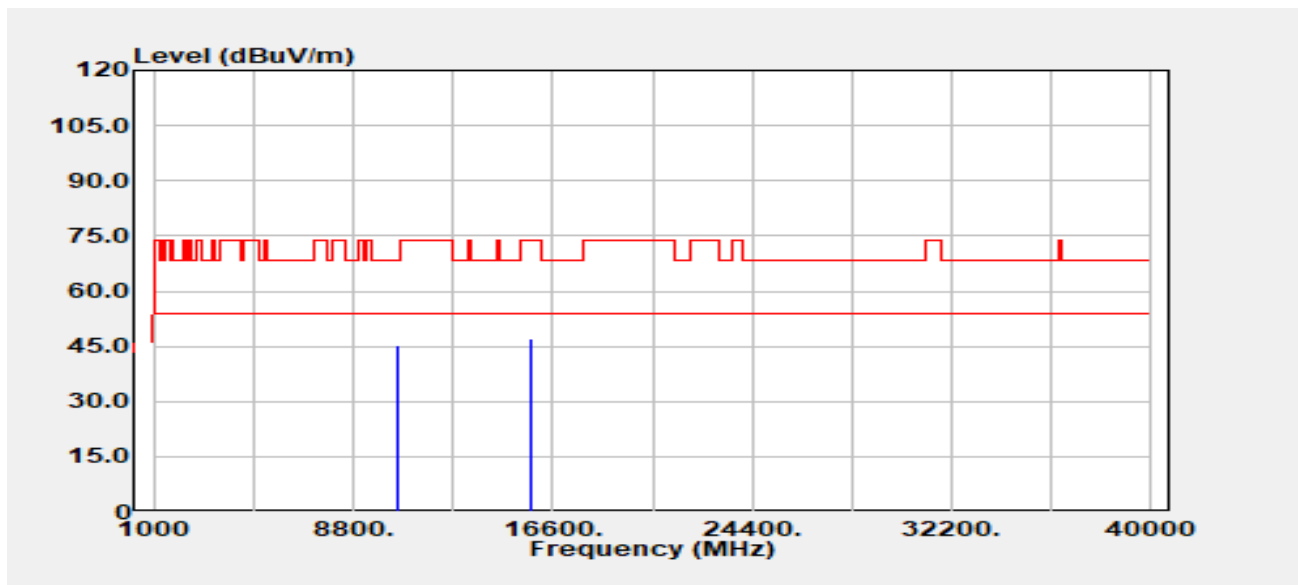


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.000	Peak	33.89	11.41	45.30	68.20	-22.90
15780.000	Peak	33.20	14.08	47.28	74.00	-26.72
15780.000	Average	22.71	14.08	36.78	54.00	-17.22

Report No.: TMWK2308002691KR

Page 238 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

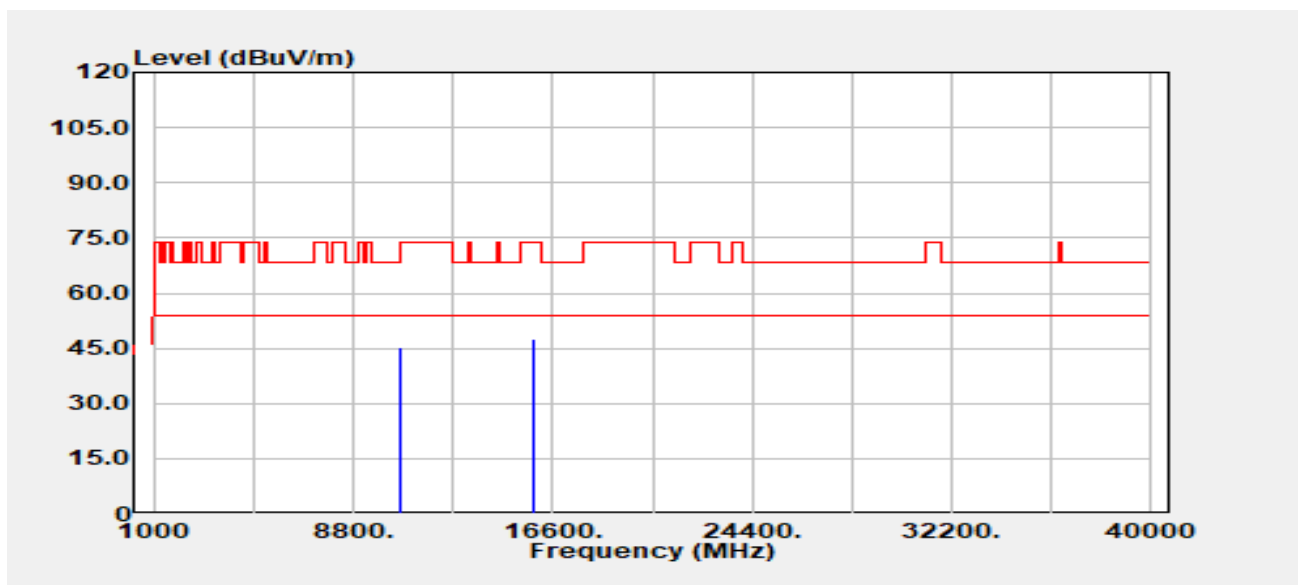


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.000	Peak	33.69	11.53	45.22	68.20	-22.98
15900.000	Peak	33.11	14.45	47.56	74.00	-26.44
15900.000	Average	23.43	14.45	37.88	54.00	-16.12

Report No.: TMWK2308002691KR

Page 239 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

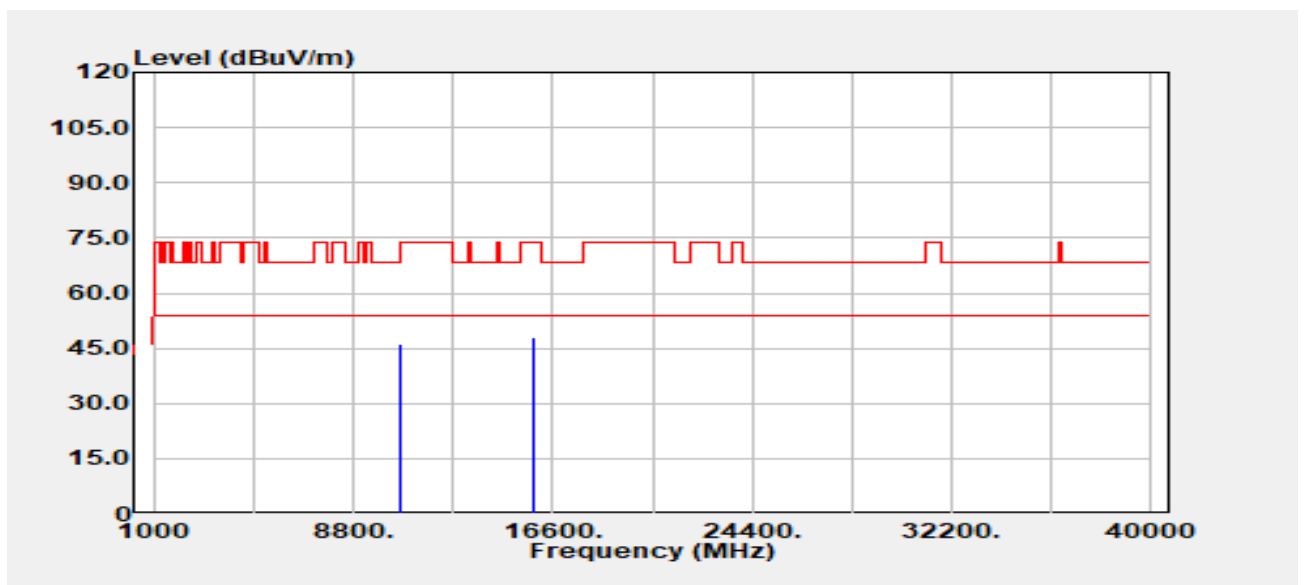


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.000	Peak	34.65	11.53	46.18	68.20	-22.02
15900.000	Peak	33.49	14.45	47.94	74.00	-26.06
15900.000	Average	23.47	14.45	37.92	54.00	-16.08

Report No.: TMWK2308002691KR

Page 240 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

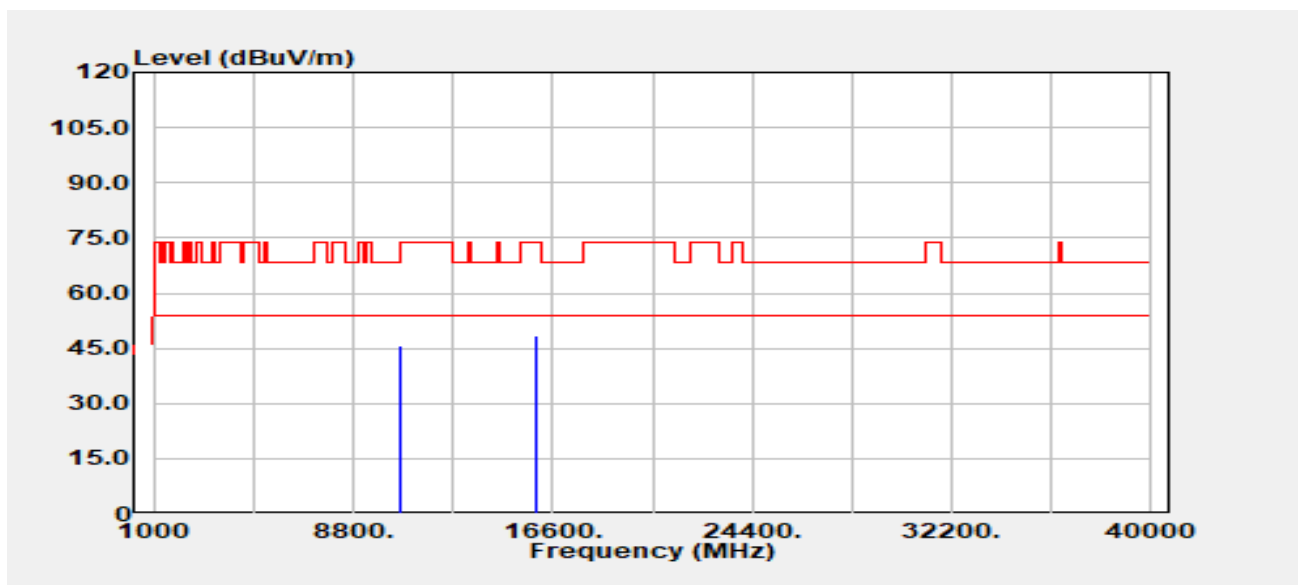


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.000	Peak	34.24	11.50	45.74	74.00	-28.26
10640.000	Average	23.90	11.50	35.40	54.00	-18.60
15960.000	Peak	33.57	15.09	48.66	74.00	-25.34
15960.000	Average	23.10	15.09	38.19	54.00	-15.81

Report No.: TMWK2308002691KR

Page 241 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

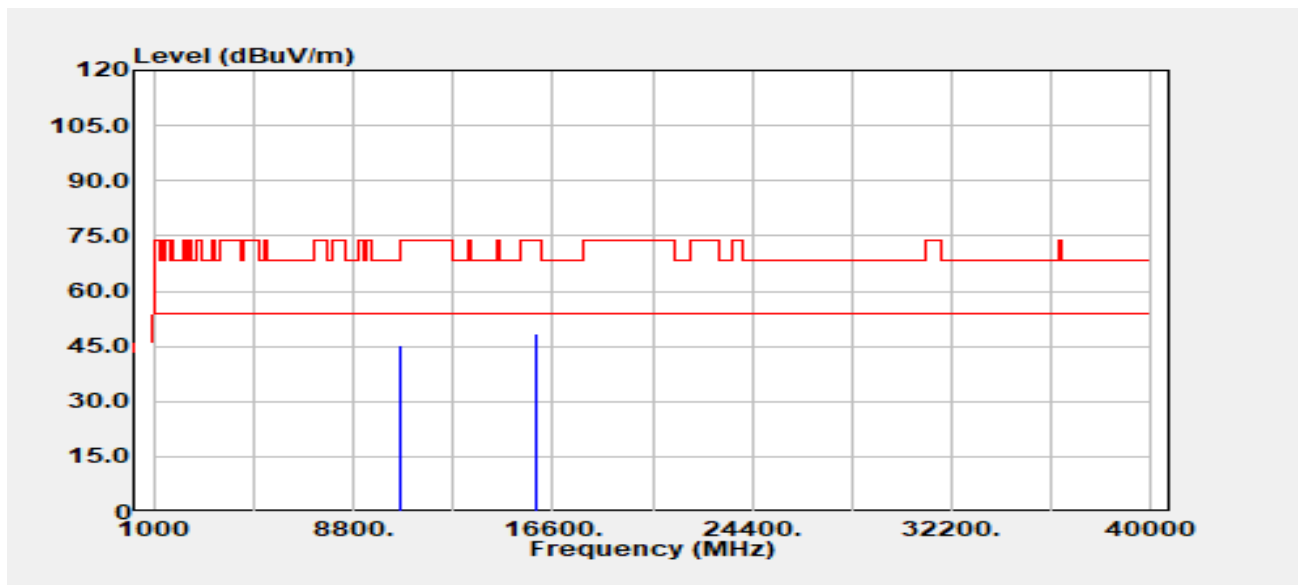


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.000	Peak	33.81	11.50	45.31	74.00	-28.69
10640.000	Average	23.88	11.50	35.38	54.00	-18.62
15960.000	Peak	33.27	15.09	48.36	74.00	-25.64
15960.000	Average	23.07	15.09	38.16	54.00	-15.84

Report No.: TMWK2308002691KR

Page 242 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5270 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

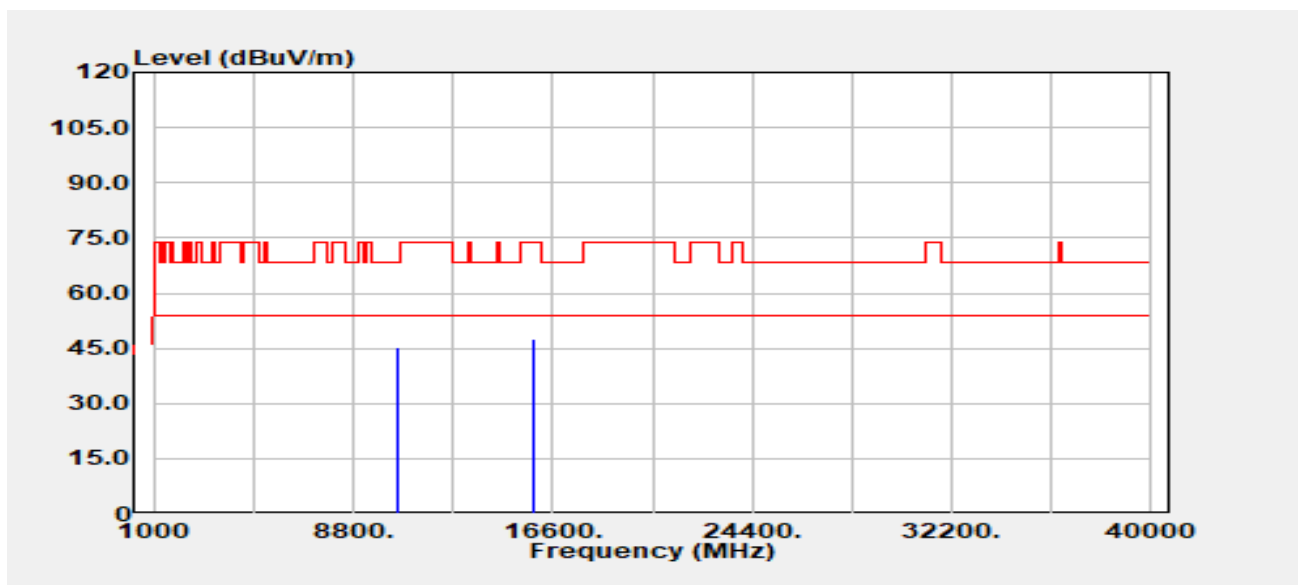


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.000	Peak	33.78	11.41	45.19	68.20	-23.01
15810.000	Peak	33.33	14.04	47.37	74.00	-26.63
15810.000	Average	24.60	14.04	38.64	54.00	-15.36

Report No.: TMWK2308002691KR

Page 243 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5270 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

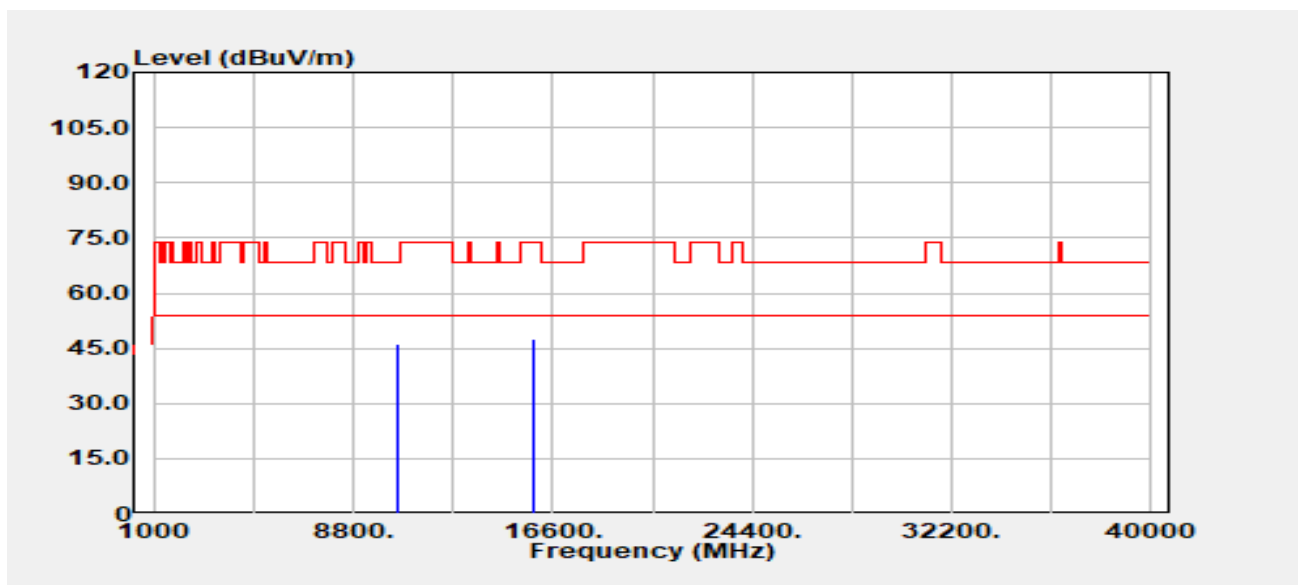


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.000	Peak	34.79	11.41	46.20	68.20	-22.00
15810.000	Peak	33.58	14.04	47.62	74.00	-26.38
15810.000	Average	24.50	14.04	38.54	54.00	-15.46

Report No.: TMWK2308002691KR

Page 244 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5310 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

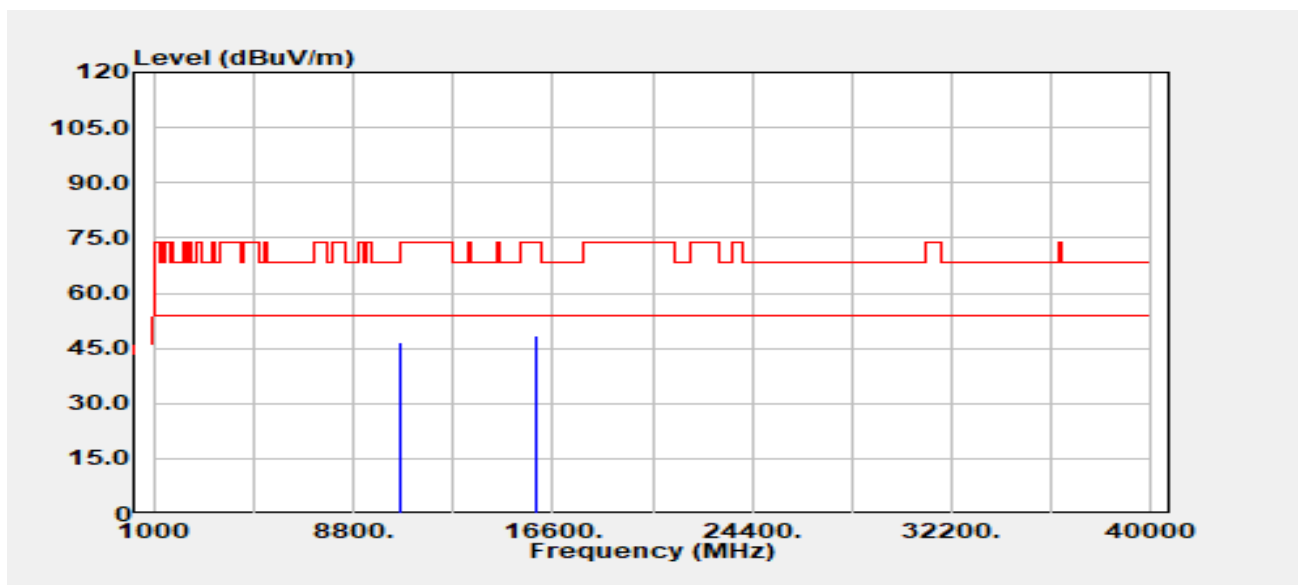


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.000	Peak	34.93	11.52	46.45	74.00	-27.55
10620.000	Average	25.39	11.52	36.91	54.00	-17.09
15930.000	Peak	33.73	14.81	48.54	74.00	-25.46
15930.000	Average	24.87	14.81	39.68	54.00	-14.32

Report No.: TMWK2308002691KR

Page 245 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5310 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

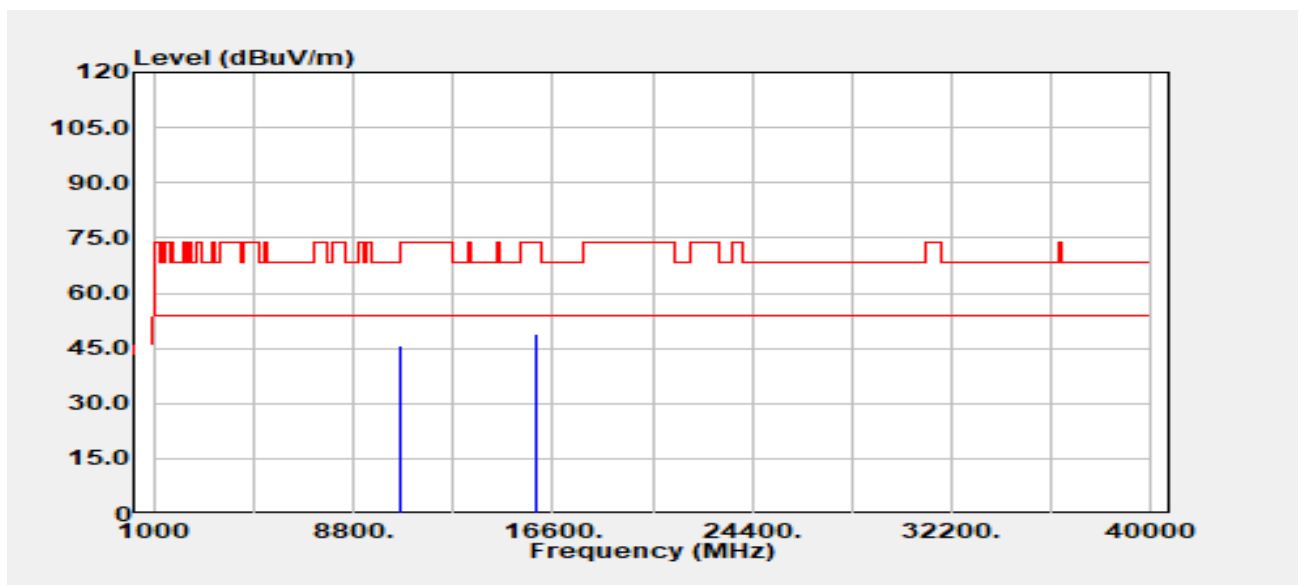


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.000	Peak	34.38	11.52	45.90	74.00	-28.10
10620.000	Average	25.48	11.52	37.00	54.00	-17.00
15930.000	Peak	34.12	14.81	48.94	74.00	-25.06
15930.000	Average	24.38	14.81	39.19	54.00	-14.81

Report No.: TMWK2308002691KR

Page 246 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

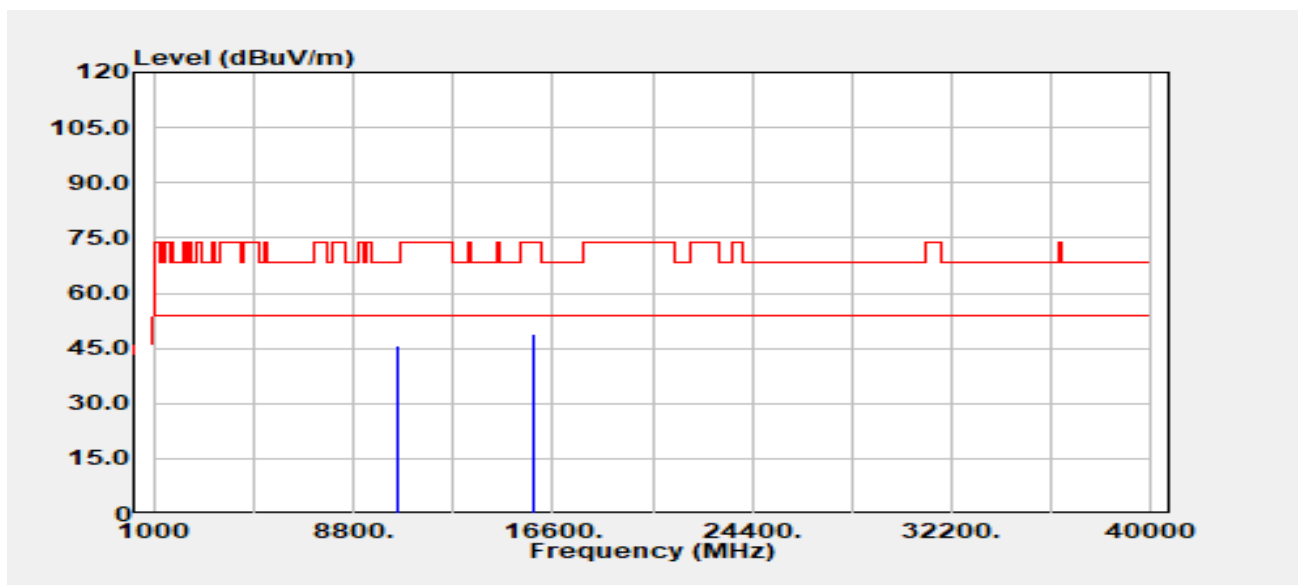


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.000	Peak	34.12	11.48	45.60	68.20	-22.60
15870.000	Peak	34.39	14.34	48.73	74.00	-25.27
15870.000	Average	24.62	14.34	38.96	54.00	-15.04

Report No.: TMWK2308002691KR

Page 247 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

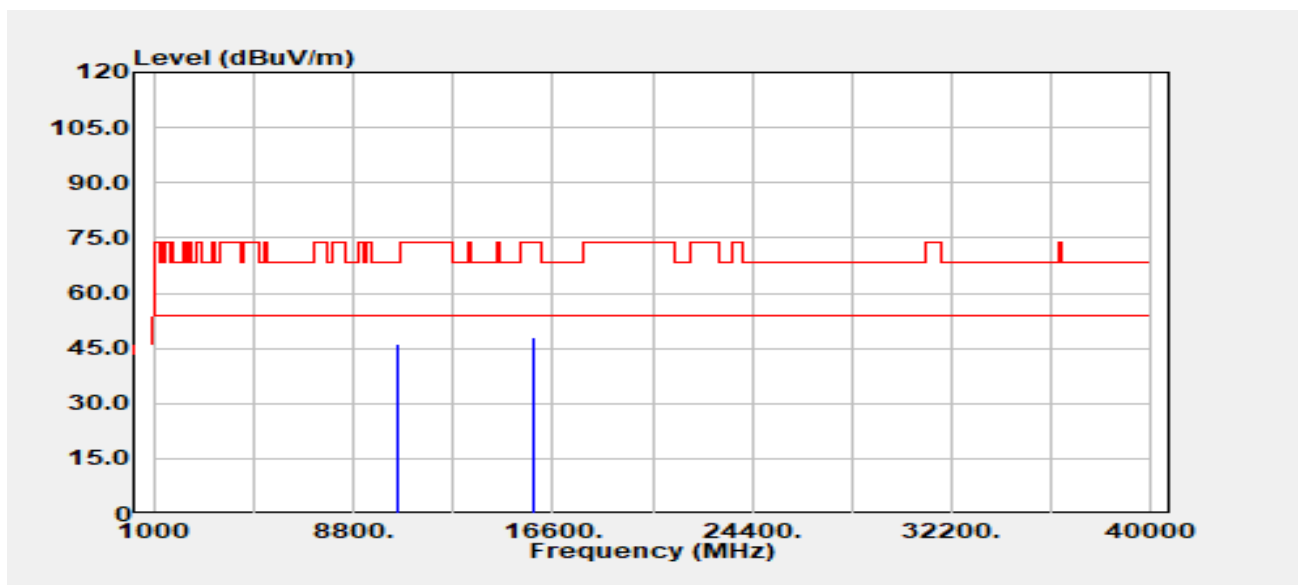


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.000	Peak	34.85	11.48	46.33	68.20	-21.87
15870.000	Peak	33.48	14.34	47.82	74.00	-26.18
15870.000	Average	24.64	14.34	38.98	54.00	-15.02

Report No.: TMWK2308002691KR

Page 248 / 391
Rev.: 00

Project Number	:TM-2308000057P	Test Date	:2023-09-01
Operation Band	:802.11ac80/Band2_BT EDR	Temp./Humi.	:24.6/58
Frequency	:5290 MHz_2480 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray.Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

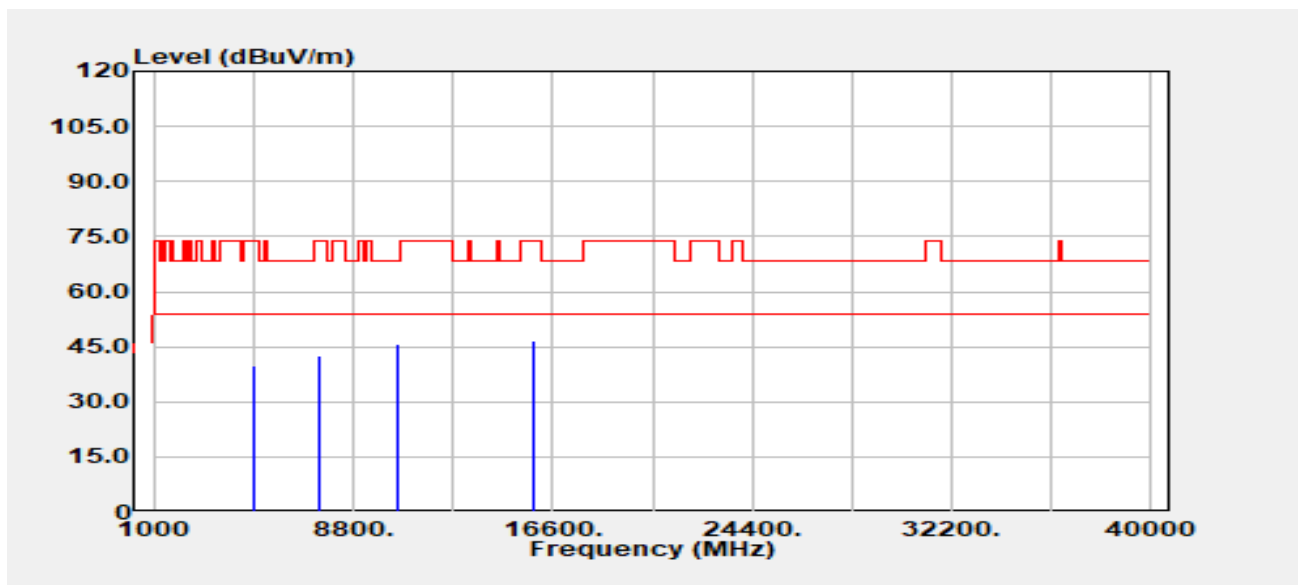


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4960.000	Peak	37.78	2.25	40.03	74.00	-33.97
4960.000	Average	27.97	2.25	30.22	54.00	-23.78
7440.000	Peak	34.94	7.64	42.57	74.00	-31.43
7440.000	Average	24.70	7.64	32.34	54.00	-21.66
10580.000	Peak	34.09	11.48	45.57	68.20	-22.63
15870.000	Peak	32.20	14.34	46.55	74.00	-27.45
15870.000	Average	23.37	14.34	37.71	54.00	-16.29

Report No.: TMWK2308002691KR

Page 249 / 391
Rev.: 00

Project Number	:TM-2308000057P	Test Date	:2023-09-01
Operation Band	:802.11ac80/Band2_BT EDR	Temp./Humi.	:24.6/58
Frequency	:5290 MHz_2480 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray.Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

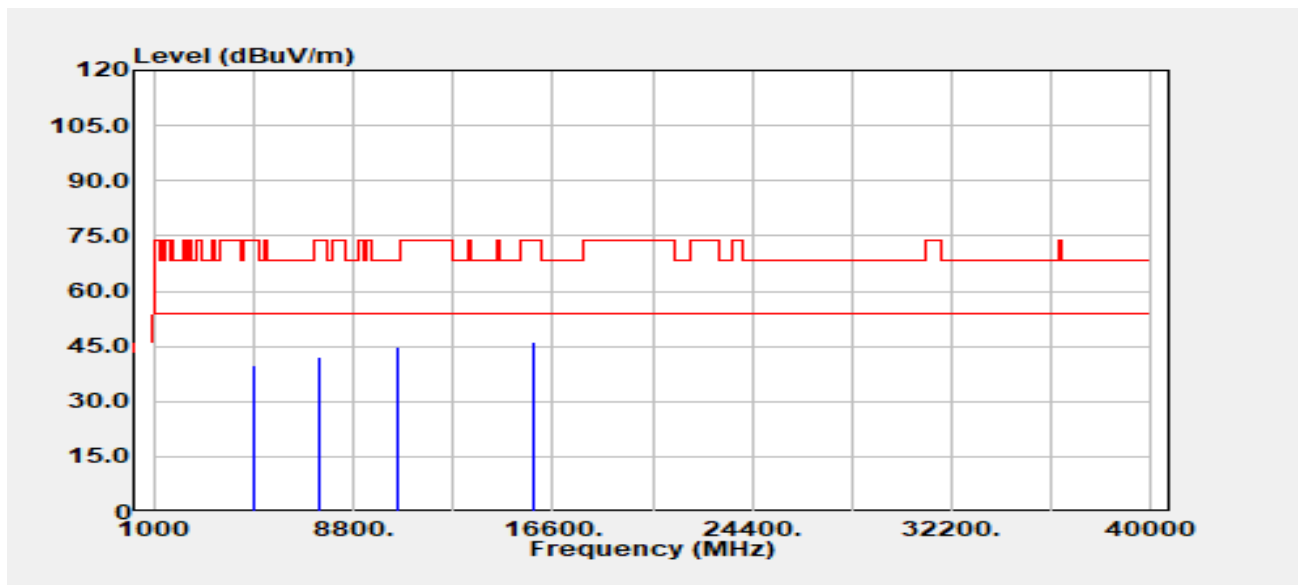


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4960.000	Peak	37.64	2.25	39.89	74.00	-34.11
4960.000	Average	28.20	2.25	30.44	54.00	-23.56
7440.000	Peak	34.50	7.64	42.13	74.00	-31.87
7440.000	Average	24.68	7.64	32.32	54.00	-21.68
10580.000	Peak	33.36	11.48	44.84	68.20	-23.36
15870.000	Peak	32.06	14.34	46.40	74.00	-27.60
15870.000	Average	23.11	14.34	37.45	54.00	-16.55

Report No.: TMWK2308002691KR

Page 250 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

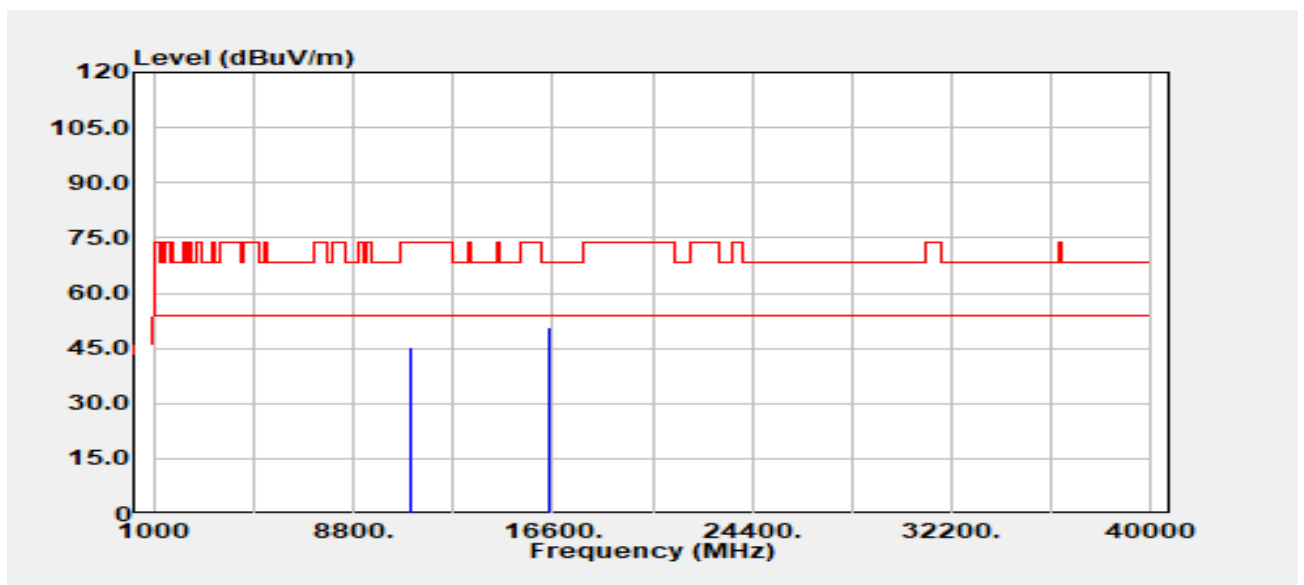


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.000	Peak	32.64	12.42	45.06	74.00	-28.94
11000.000	Average	23.61	12.42	36.03	54.00	-17.97
16500.000	Peak	31.80	18.70	50.50	68.20	-17.70

Report No.: TMWK2308002691KR

Page 251 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

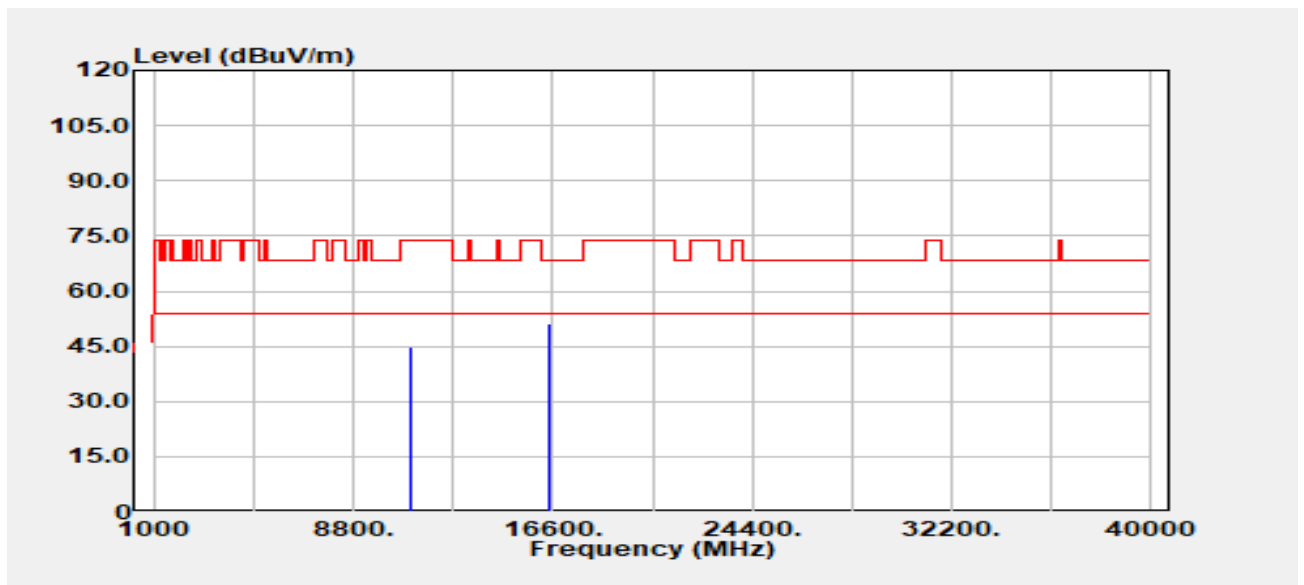


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11000.000	Peak	32.38	12.42	44.80	74.00	-29.20
11000.000	Average	23.51	12.42	35.93	54.00	-18.07
16500.000	Peak	32.50	18.70	51.20	68.20	-17.00

Report No.: TMWK2308002691KR

Page 252 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

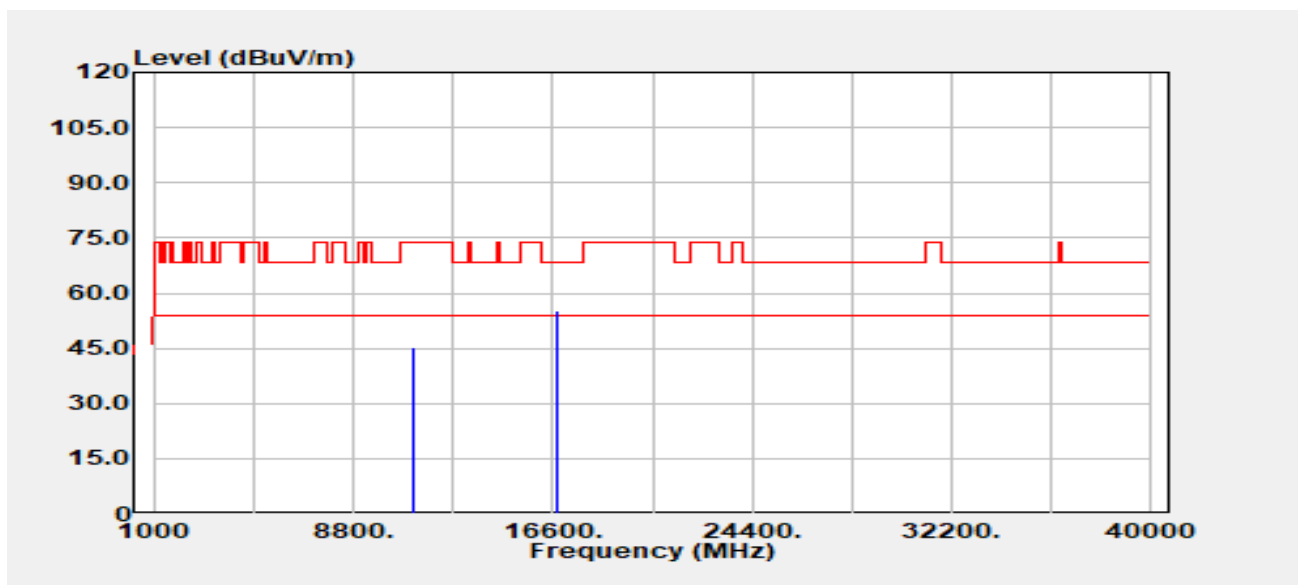


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.000	Peak	32.93	12.48	45.41	74.00	-28.59
11160.000	Average	23.76	12.48	36.24	54.00	-17.76
16740.000	Peak	34.24	20.88	55.12	68.20	-13.08

Report No.: TMWK2308002691KR

Page 253 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

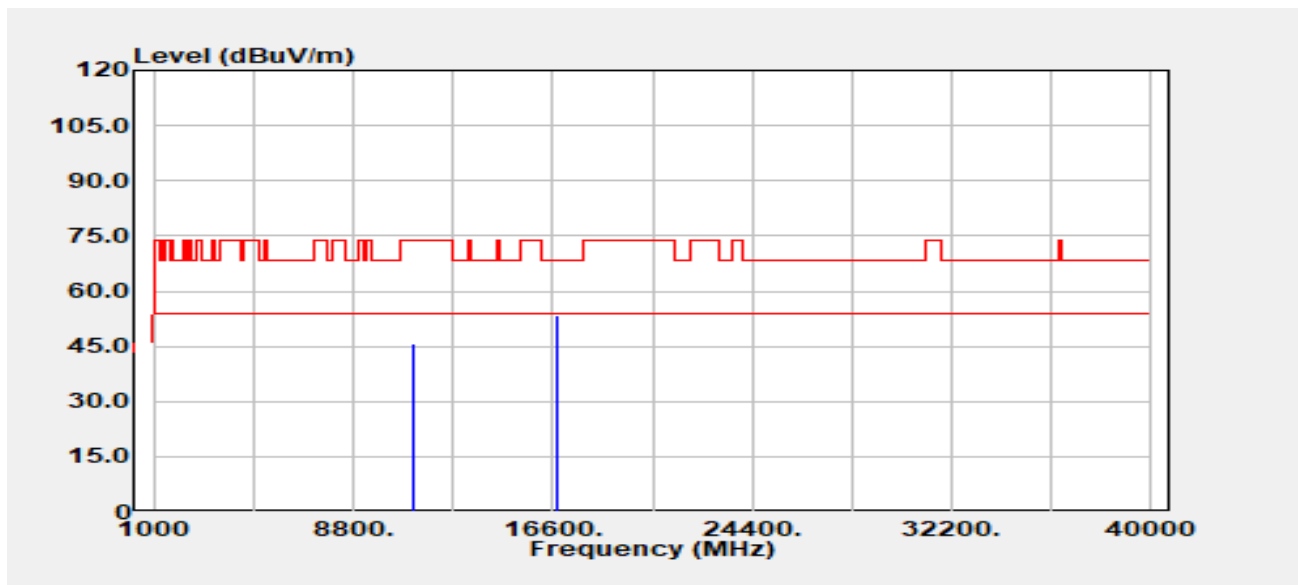


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.000	Peak	33.07	12.48	45.54	74.00	-28.46
11160.000	Average	23.62	12.48	36.10	54.00	-17.90
16740.000	Peak	32.74	20.88	53.62	68.20	-14.58

Report No.: TMWK2308002691KR

Page 254 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

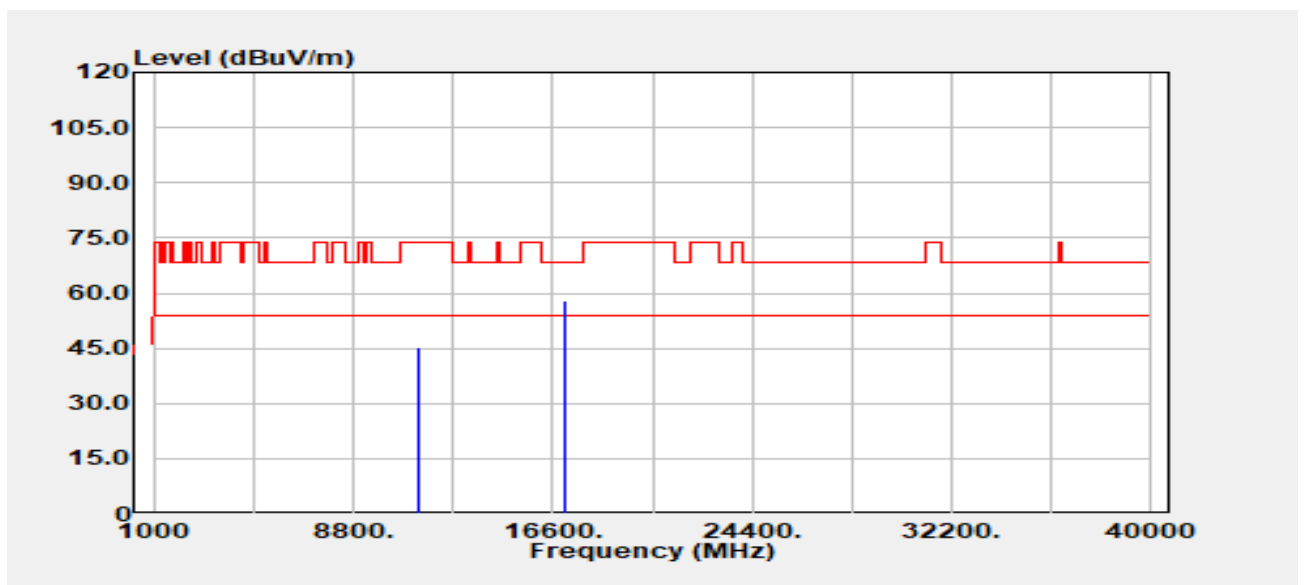


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.000	Peak	32.77	12.39	45.16	74.00	-28.84
11400.000	Average	23.52	12.39	35.91	54.00	-18.09
17100.000	Peak	32.29	25.62	57.91	68.20	-10.29

Report No.: TMWK2308002691KR

Page 255 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

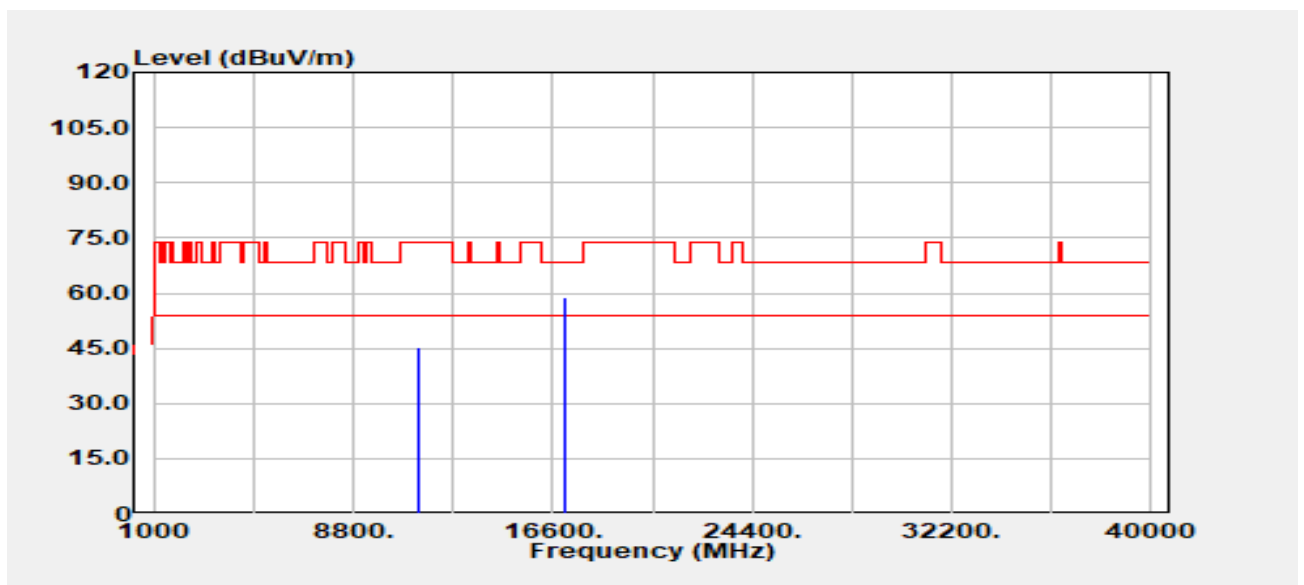


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.000	Peak	32.99	12.39	45.38	74.00	-28.62
11400.000	Average	23.41	12.39	35.80	54.00	-18.20
17100.000	Peak	33.16	25.62	58.78	68.20	-9.42

Report No.: TMWK2308002691KR

Page 256 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

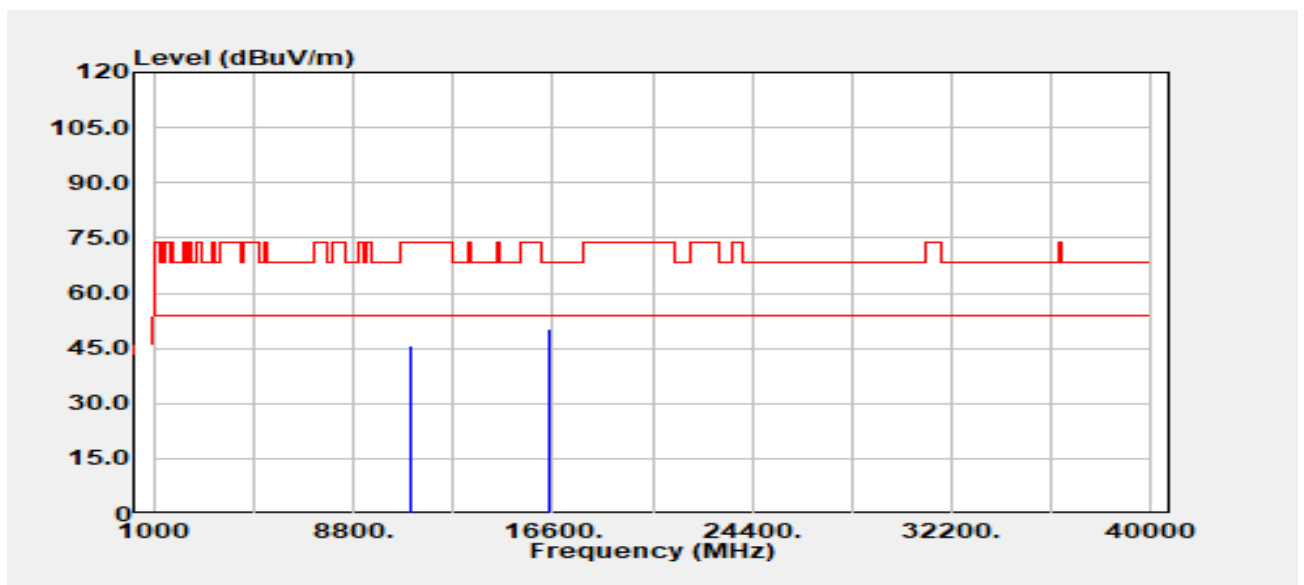


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.000	Peak	33.41	12.42	45.83	74.00	-28.17
11000.000	Average	23.47	12.42	35.89	54.00	-18.11
16500.000	Peak	31.66	18.70	50.36	68.20	-17.84

Report No.: TMWK2308002691KR

Page 257 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

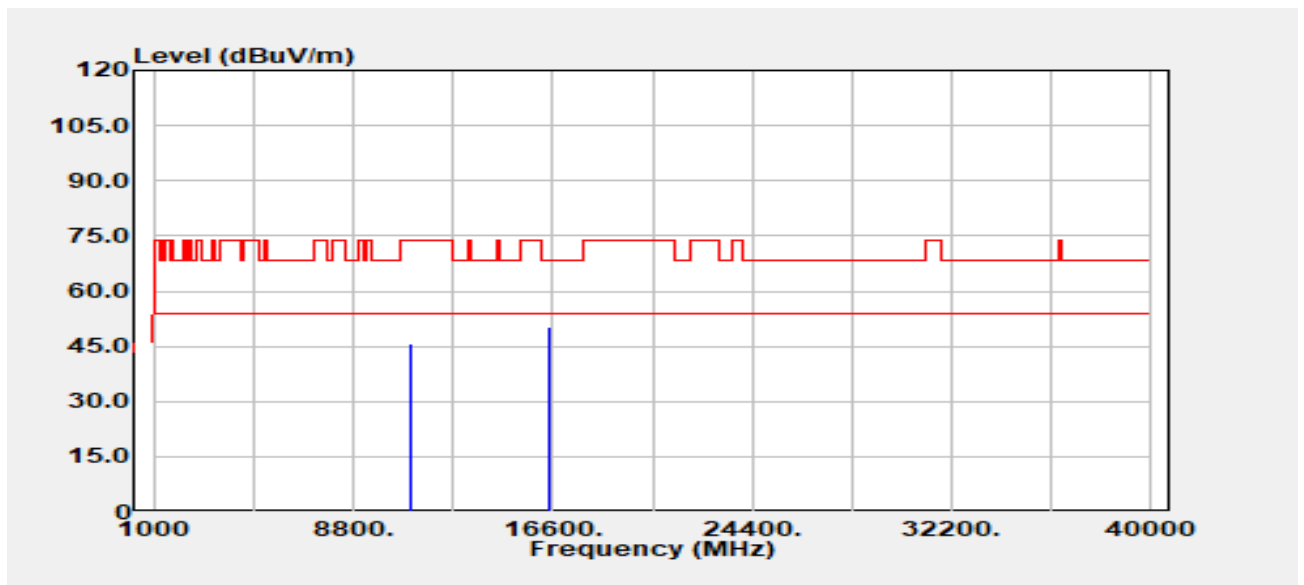


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.000	Peak	33.33	12.42	45.75	74.00	-28.25
11000.000	Average	23.43	12.42	35.85	54.00	-18.15
16500.000	Peak	31.51	18.70	50.21	68.20	-17.99

Report No.: TMWK2308002691KR

Page 258 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

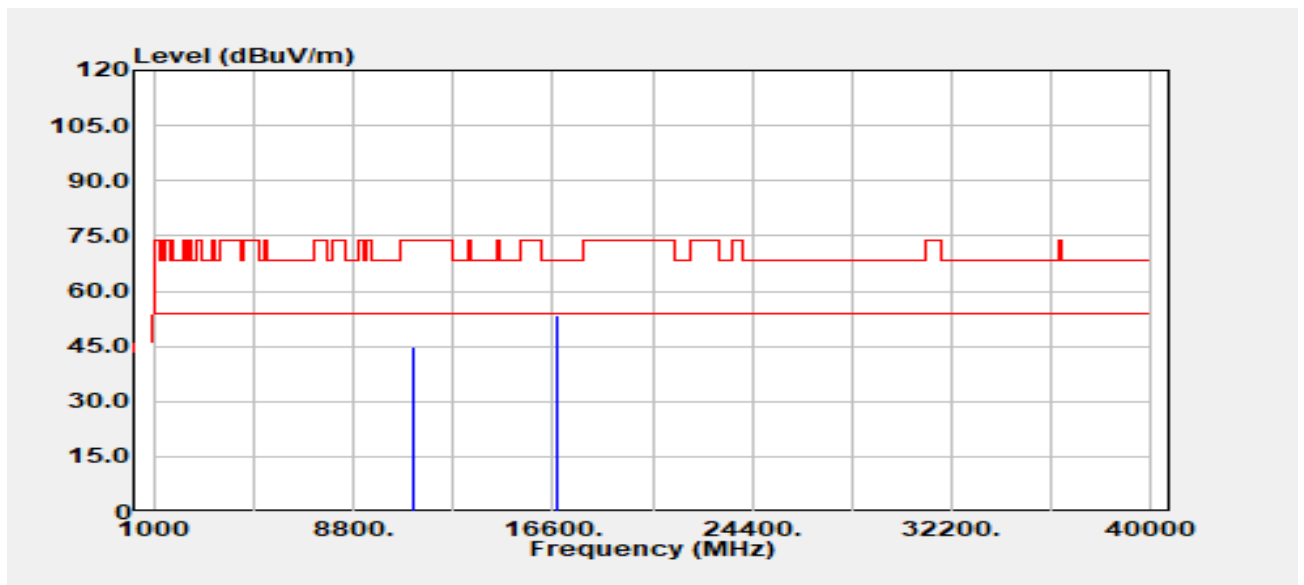


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.000	Peak	32.54	12.48	45.02	74.00	-28.98
11160.000	Average	23.76	12.48	36.24	54.00	-17.76
16740.000	Peak	32.61	20.88	53.49	68.20	-14.71

Report No.: TMWK2308002691KR

Page 259 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

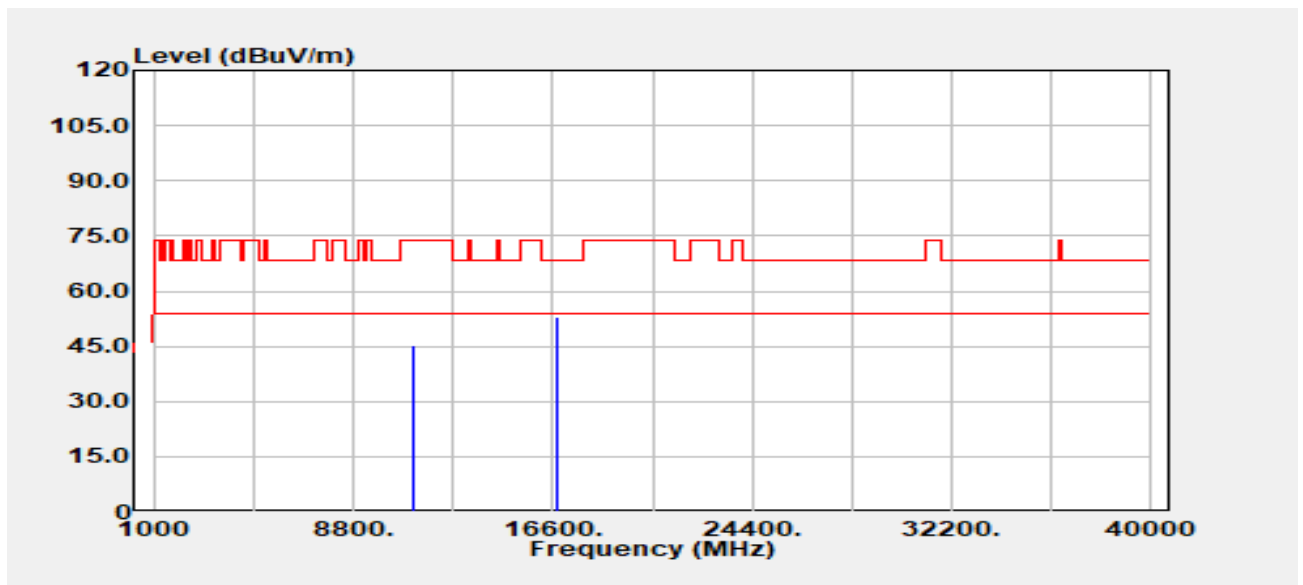


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.000	Peak	32.91	12.48	45.39	74.00	-28.61
11160.000	Average	23.46	12.48	35.93	54.00	-18.07
16740.000	Peak	31.92	20.88	52.80	68.20	-15.40

Report No.: TMWK2308002691KR

Page 260 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

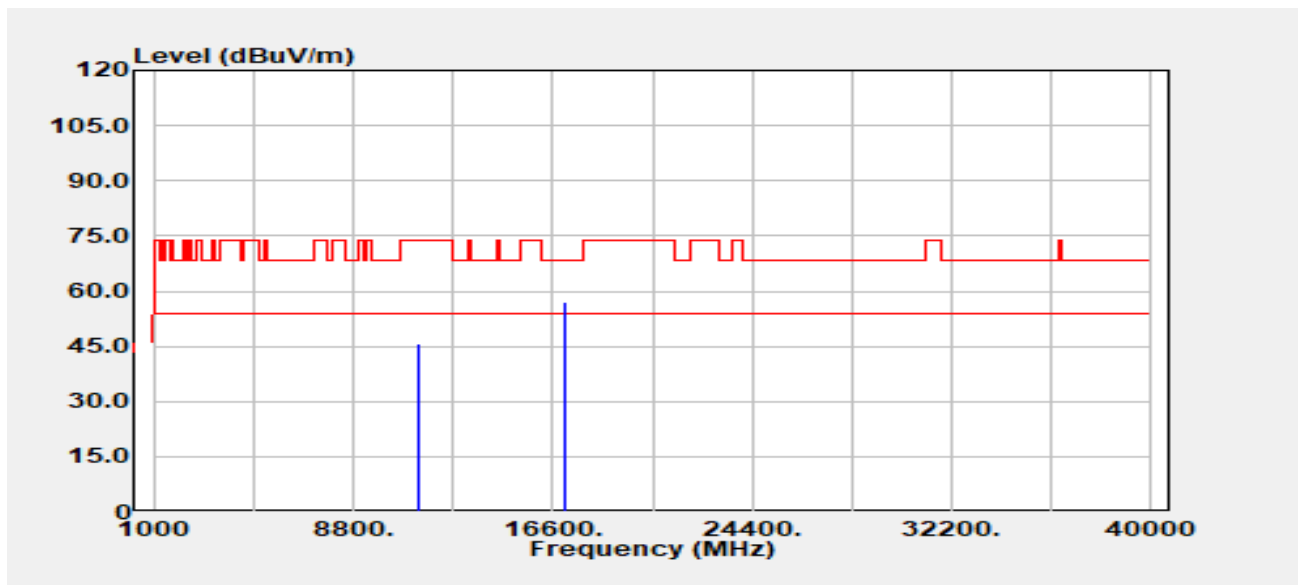


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.000	Peak	33.30	12.39	45.69	74.00	-28.31
11400.000	Average	23.34	12.39	35.73	54.00	-18.27
17100.000	Peak	31.30	25.62	56.92	68.20	-11.28

Report No.: TMWK2308002691KR

Page 261 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

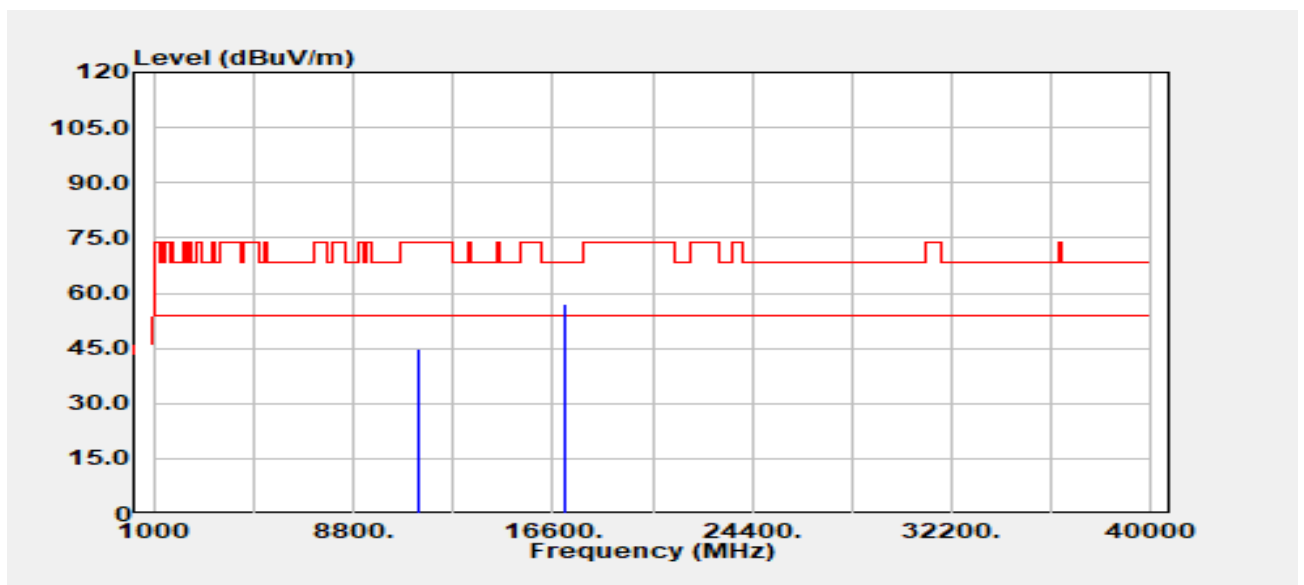


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.000	Peak	32.62	12.39	45.01	74.00	-28.99
11400.000	Average	23.49	12.39	35.88	54.00	-18.12
17100.000	Peak	31.27	25.62	56.89	68.20	-11.31

Report No.: TMWK2308002691KR

Page 262 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

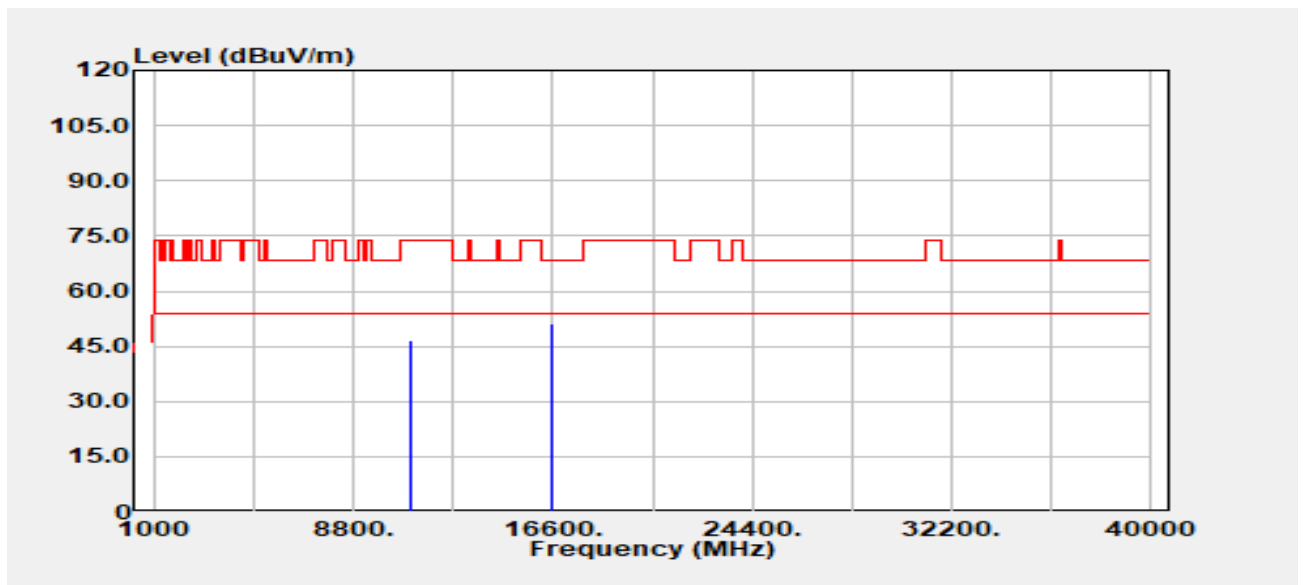


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.000	Peak	34.07	12.39	46.46	74.00	-27.54
11020.000	Average	25.01	12.39	37.40	54.00	-16.60
16530.000	Peak	32.62	18.66	51.28	68.20	-16.92

Report No.: TMWK2308002691KR

Page 263 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

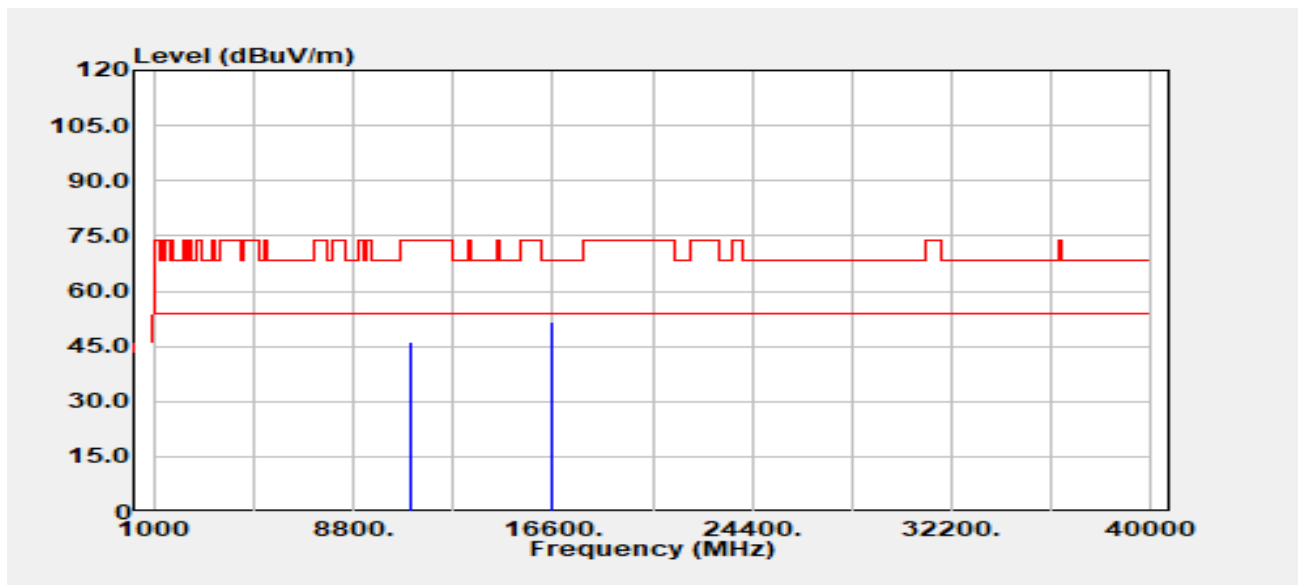


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.000	Peak	33.92	12.39	46.31	74.00	-27.69
11020.000	Average	24.94	12.39	37.33	54.00	-16.67
16530.000	Peak	32.89	18.66	51.55	68.20	-16.65

Report No.: TMWK2308002691KR

Page 264 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5550 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

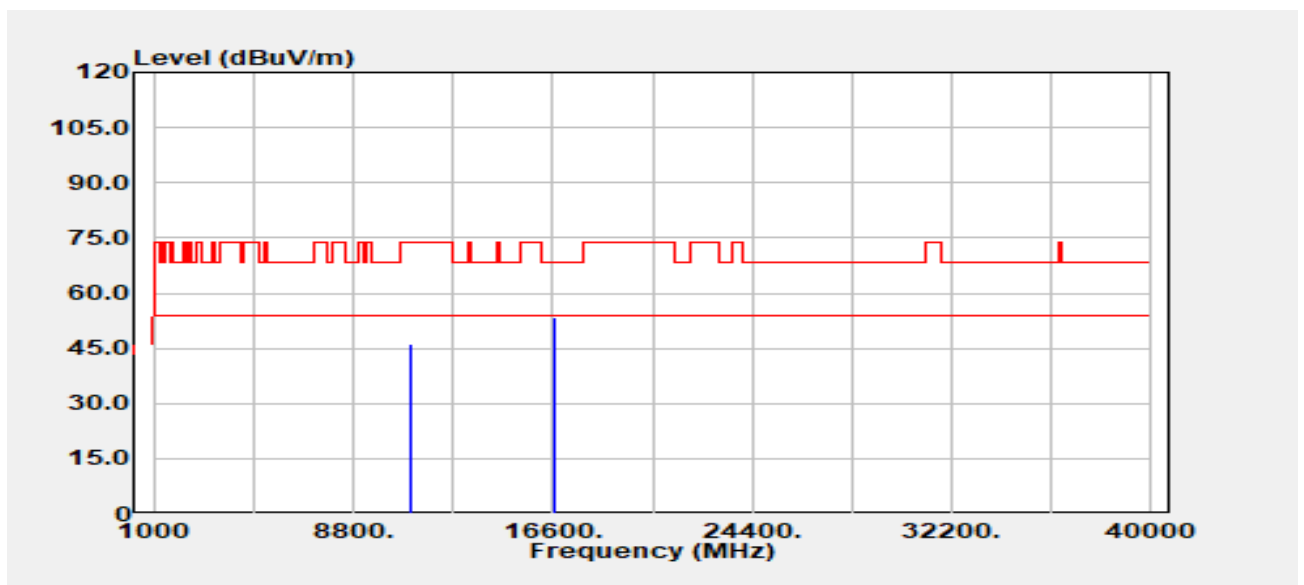


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.000	Peak	33.81	12.60	46.41	74.00	-27.59
11100.000	Average	24.16	12.60	36.76	54.00	-17.24
16650.000	Peak	33.35	19.99	53.34	68.20	-14.86

Report No.: TMWK2308002691KR

Page 265 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5550 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

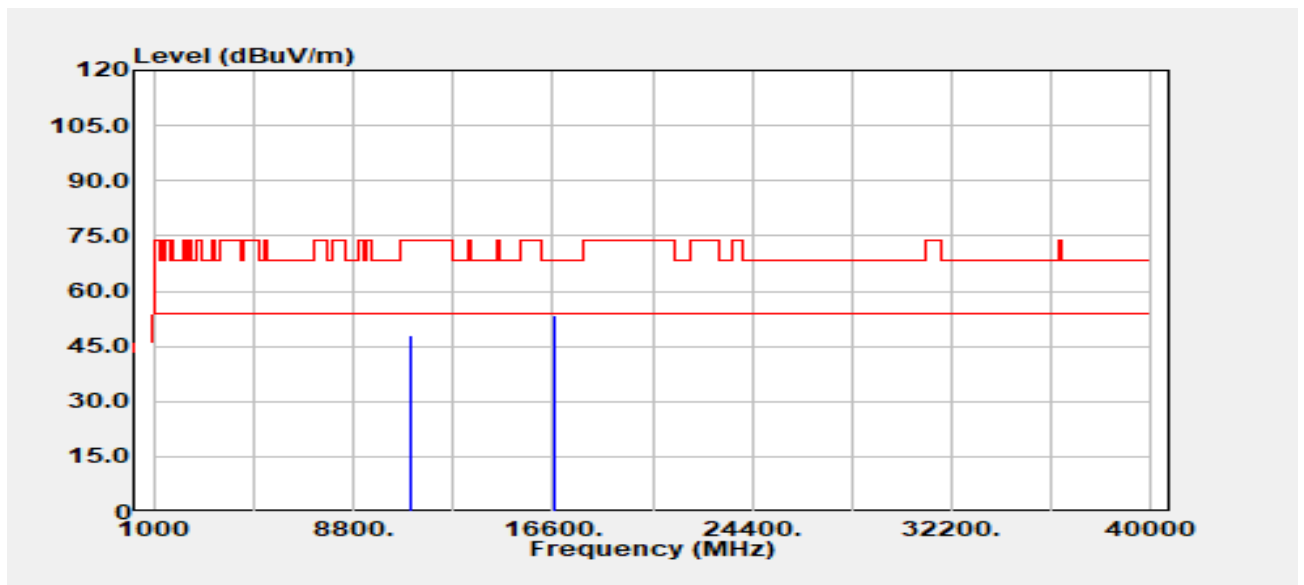


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.000	Peak	35.23	12.60	47.83	74.00	-26.17
11100.000	Average	24.83	12.60	37.43	54.00	-16.57
16650.000	Peak	33.61	19.99	53.59	68.20	-14.61

Report No.: TMWK2308002691KR

Page 266 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

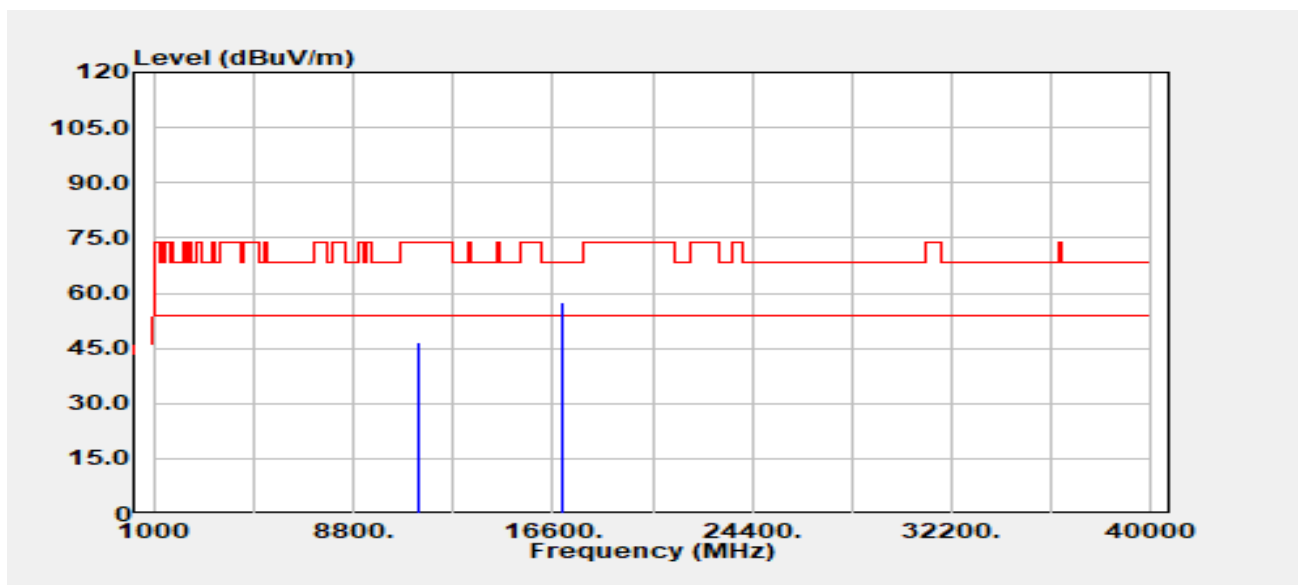


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.000	Peak	34.01	12.55	46.57	74.00	-27.43
11340.000	Average	24.21	12.55	36.76	54.00	-17.24
17010.000	Peak	32.33	25.32	57.64	68.20	-10.56

Report No.: TMWK2308002691KR

Page 267 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

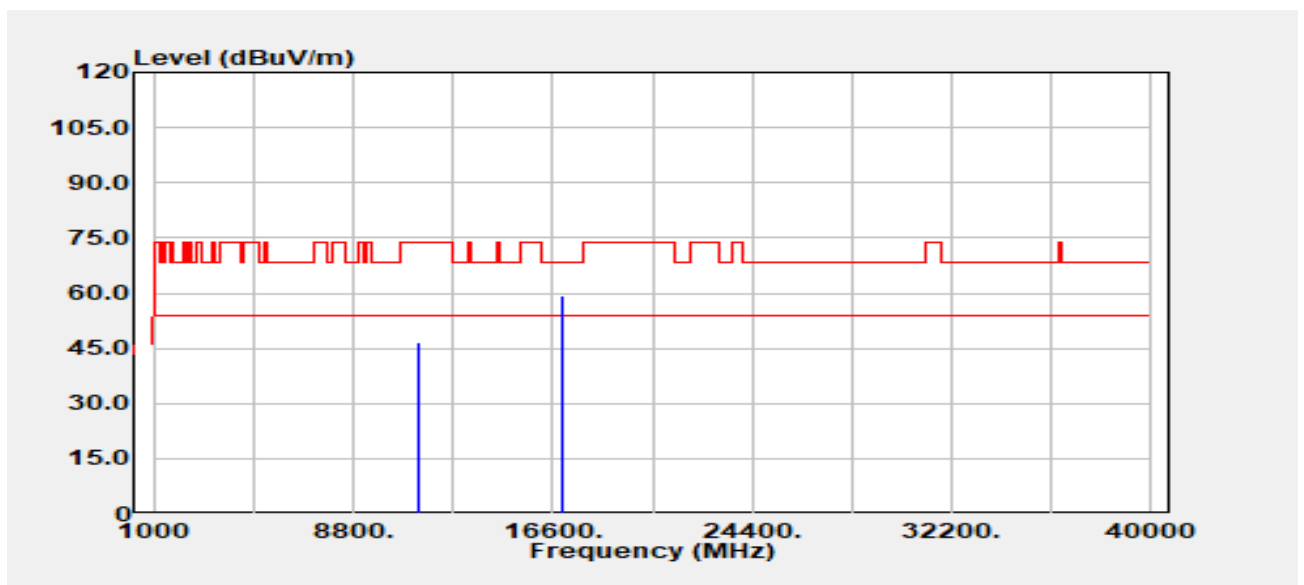


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.000	Peak	34.22	12.55	46.77	74.00	-27.23
11340.000	Average	24.62	12.55	37.17	54.00	-16.83
17010.000	Peak	33.95	25.32	59.27	68.20	-8.93

Report No.: TMWK2308002691KR

Page 268 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

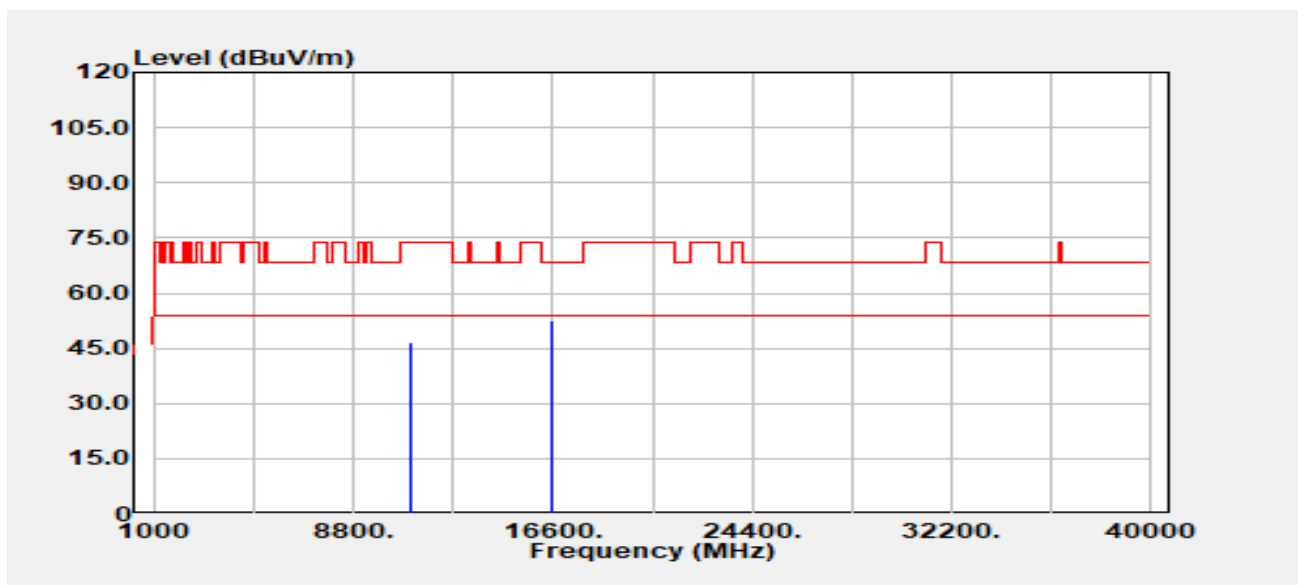


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.000	Peak	34.21	12.40	46.60	74.00	-27.40
11060.000	Average	24.93	12.40	37.33	54.00	-16.67
16590.000	Peak	33.48	19.22	52.70	68.20	-15.50

Report No.: TMWK2308002691KR

Page 269 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

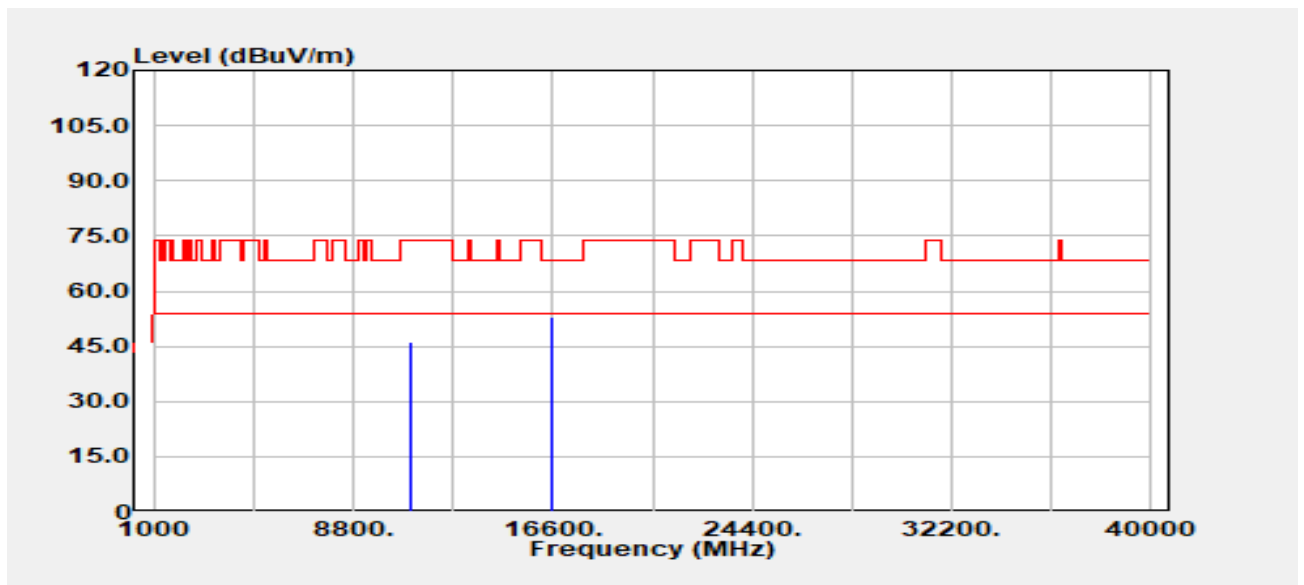


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.000	Peak	33.92	12.40	46.31	74.00	-27.69
11060.000	Average	25.02	12.40	37.42	54.00	-16.58
16590.000	Peak	33.94	19.22	53.16	68.20	-15.04

Report No.: TMWK2308002691KR

Page 270 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

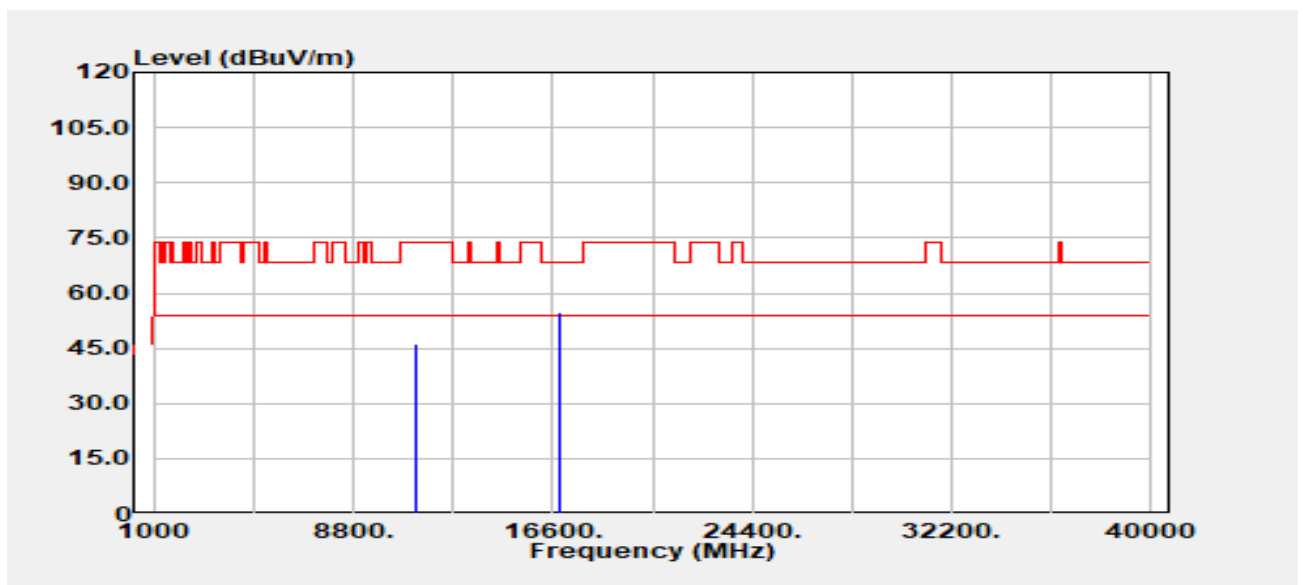


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11220.000	Peak	33.66	12.60	46.27	74.00	-27.73
11220.000	Average	24.87	12.60	37.47	54.00	-16.53
16830.000	Peak	32.64	22.01	54.65	68.20	-13.55

Report No.: TMWK2308002691KR

Page 271 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

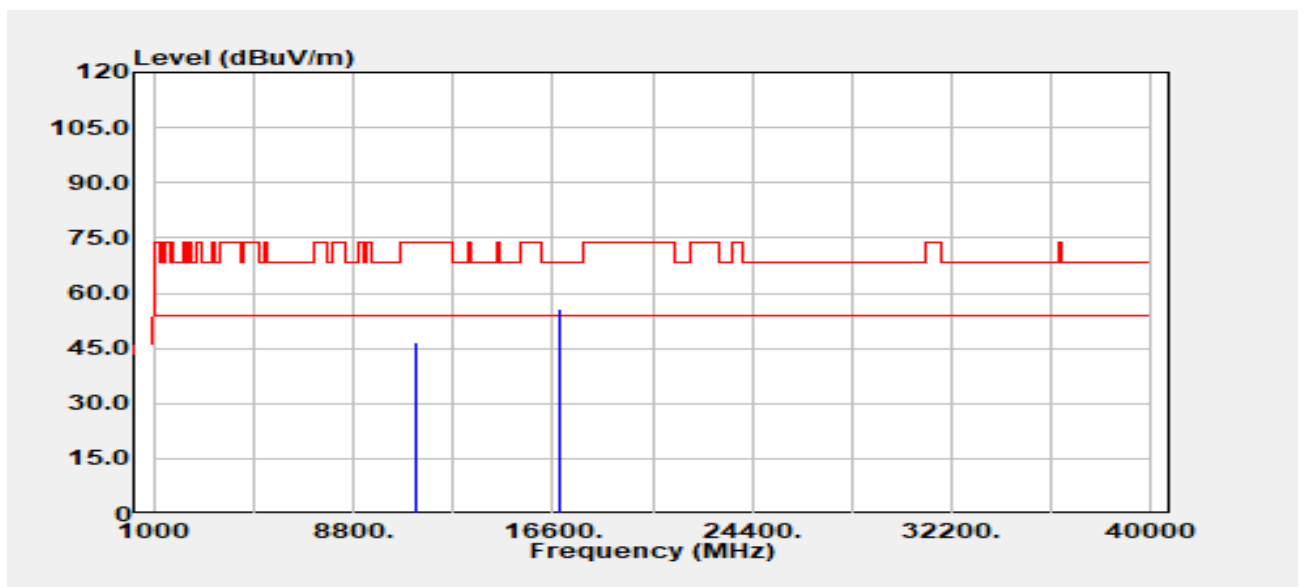


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11220.000	Peak	34.21	12.60	46.81	74.00	-27.19
11220.000	Average	25.01	12.60	37.61	54.00	-16.39
16830.000	Peak	33.60	22.01	55.60	68.20	-12.60

Report No.: TMWK2308002691KR

Page 272 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3~4
Frequency :5720 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

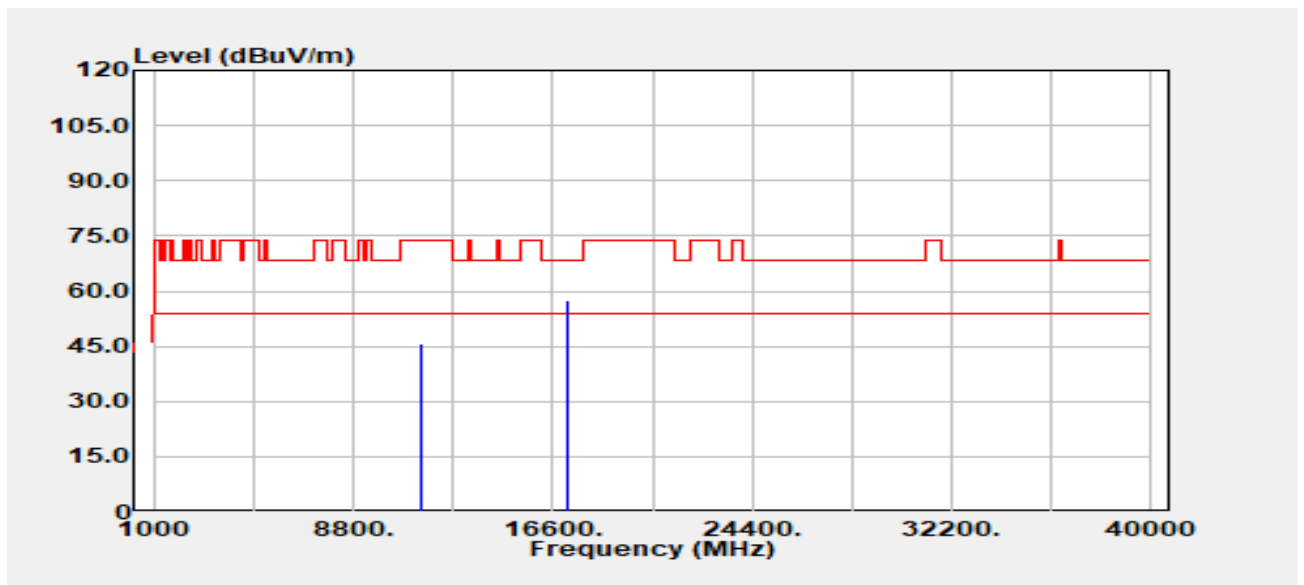


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11440.000	Peak	33.40	12.33	45.72	74.00	-28.28
11440.000	Average	23.46	12.33	35.78	54.00	-18.22
17160.000	Peak	31.27	26.20	57.46	68.20	-10.74

Report No.: TMWK2308002691KR

Page 273 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3~4
Frequency :5720 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

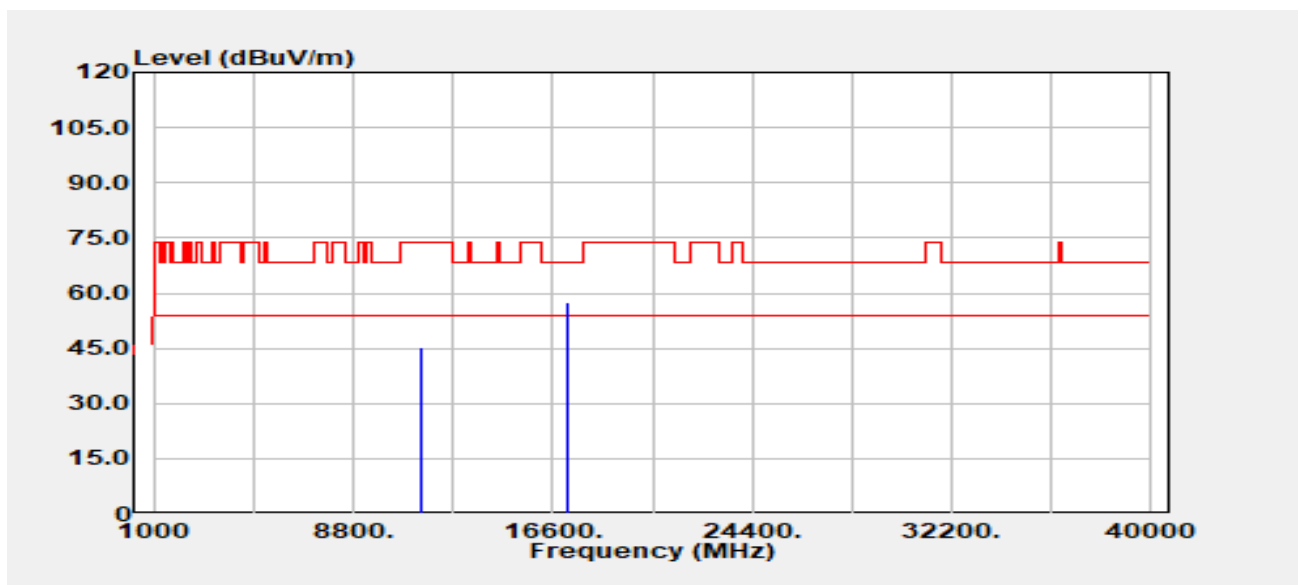


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11440.000	Peak	32.98	12.33	45.31	74.00	-28.69
11440.000	Average	23.34	12.33	35.67	54.00	-18.33
17160.000	Peak	31.47	26.20	57.67	68.20	-10.53

Report No.: TMWK2308002691KR

Page 274 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3~4
Frequency :5720 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

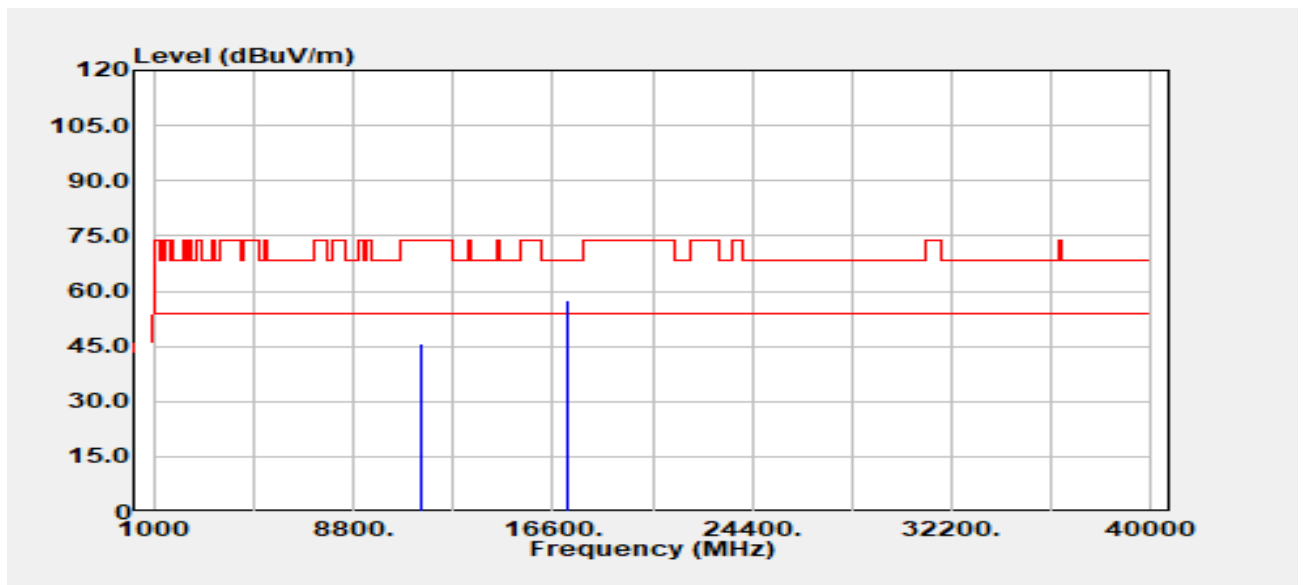


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11440.000	Peak	33.32	12.33	45.64	74.00	-28.36
11440.000	Average	23.46	12.33	35.79	54.00	-18.21
17160.000	Peak	31.34	26.20	57.53	68.20	-10.67

Report No.: TMWK2308002691KR

Page 275 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3~4
Frequency :5720 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

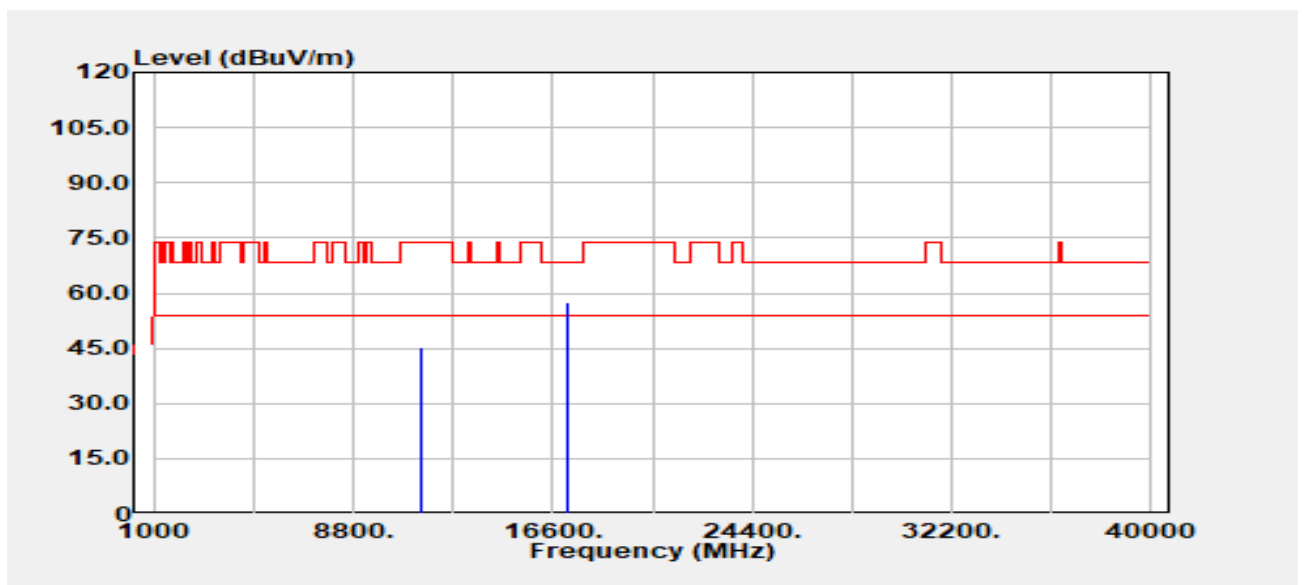


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11440.000	Peak	33.06	12.33	45.38	74.00	-28.62
11440.000	Average	23.41	12.33	35.73	54.00	-18.27
17160.000	Peak	31.31	26.20	57.51	68.20	-10.69

Report No.: TMWK2308002691KR

Page 276 / 391
Rev.: 00

Project Number	:TM-2308000057P	Test Date	:2023-08-31
Operation Band	:802.11n40/Band3~4	Temp./Humi.	:24.6/57
Frequency	:5710 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony.Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

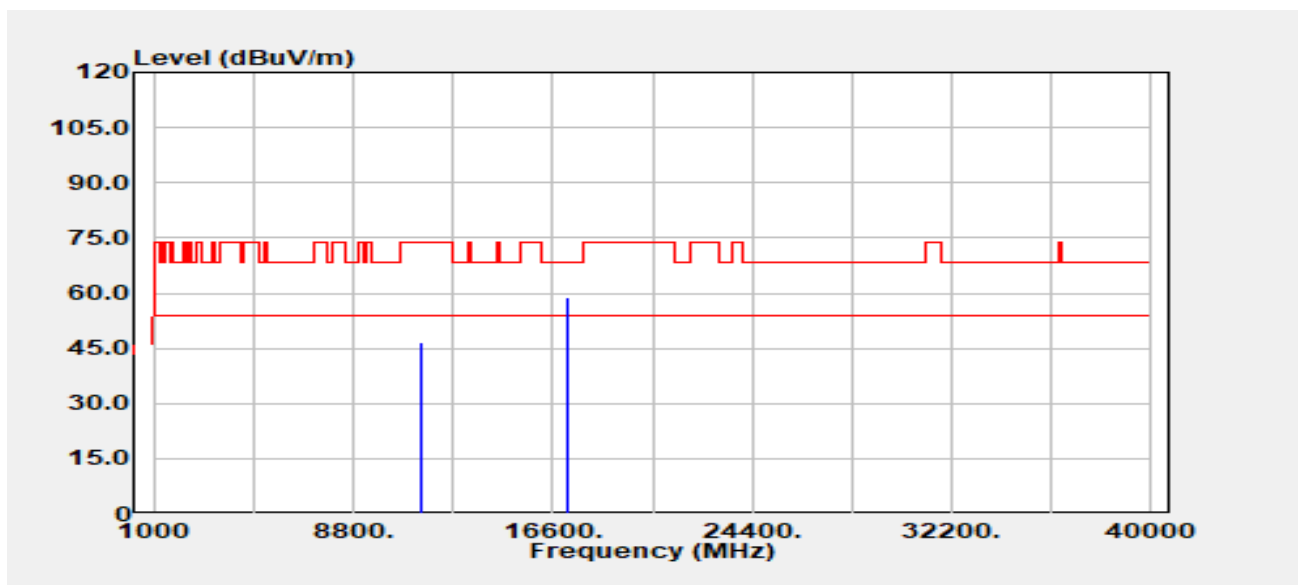


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11420.000	Peak	34.22	12.36	46.58	74.00	-27.42
11420.000	Average	24.61	12.36	36.97	54.00	-17.03
17130.000	Peak	33.03	26.00	59.03	68.20	-9.17

Report No.: TMWK2308002691KR

Page 277 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3~4
Frequency :5710 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

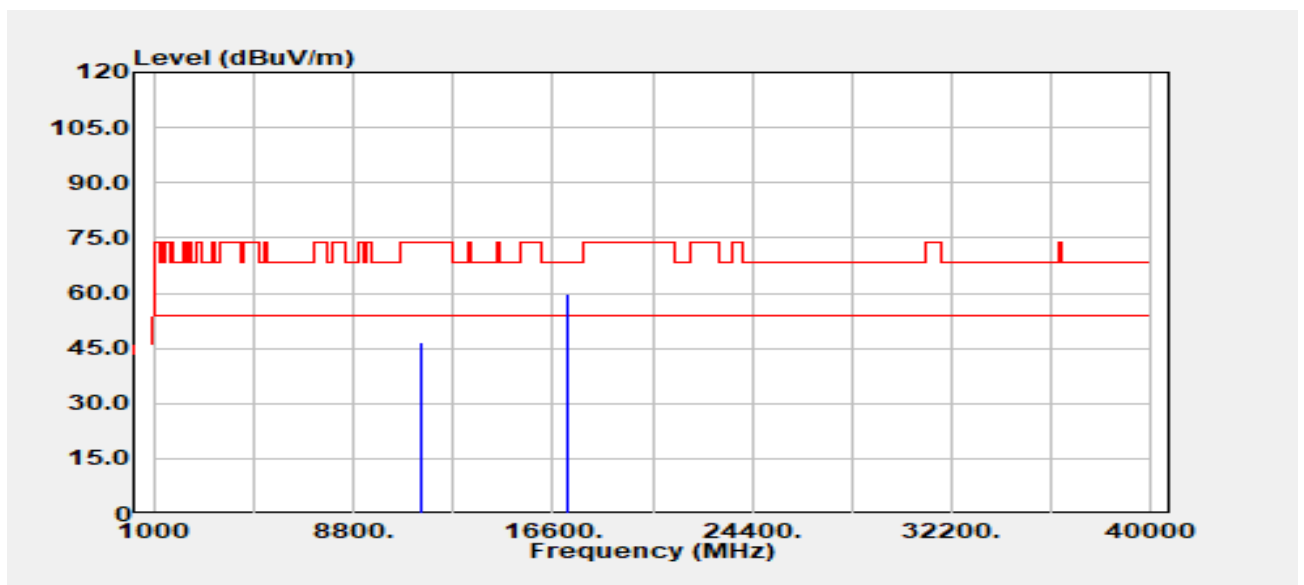


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11420.000	Peak	34.21	12.36	46.57	74.00	-27.43
11420.000	Average	24.77	12.36	37.13	54.00	-16.87
17130.000	Peak	33.58	26.00	59.58	68.20	-8.62

Report No.: TMWK2308002691KR

Page 278 / 391
Rev.: 00

Project Number	:TM-2308000057P	Test Date	:2023-08-31
Operation Band	:802.11ac80/Band3~4	Temp./Humi.	:24.6/57
Frequency	:5690 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony.Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

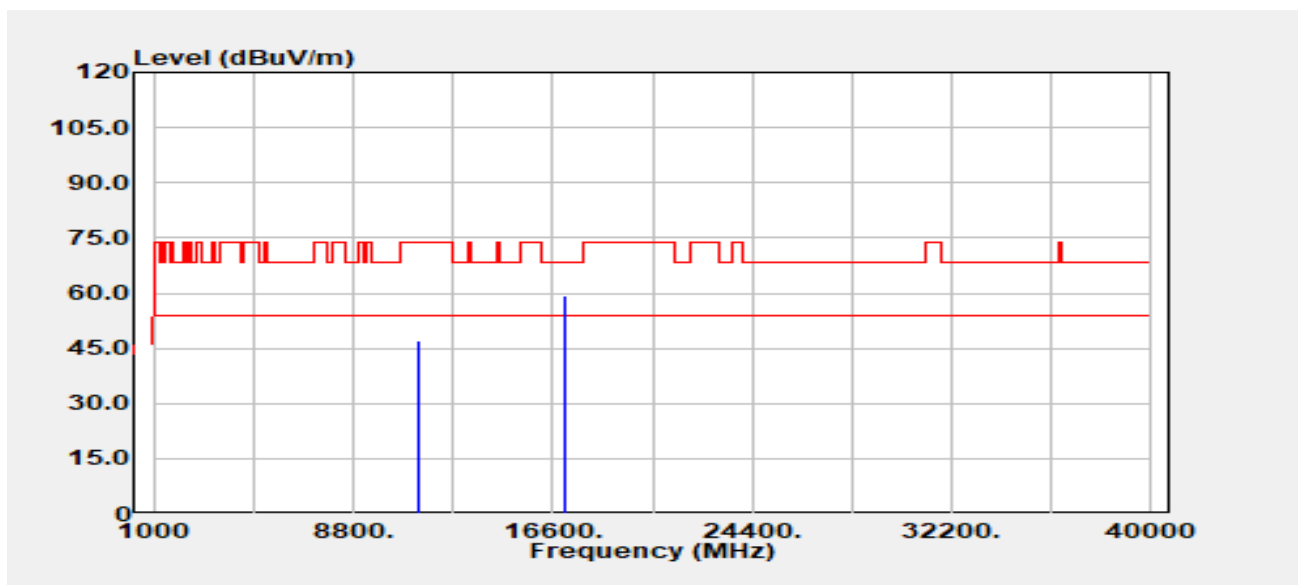


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11380.000	Peak	34.66	12.47	47.12	74.00	-26.88
11380.000	Average	24.86	12.47	37.33	54.00	-16.67
17070.000	Peak	33.78	25.70	59.48	68.20	-8.72

Report No.: TMWK2308002691KR

Page 279 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3~4
Frequency :5690 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

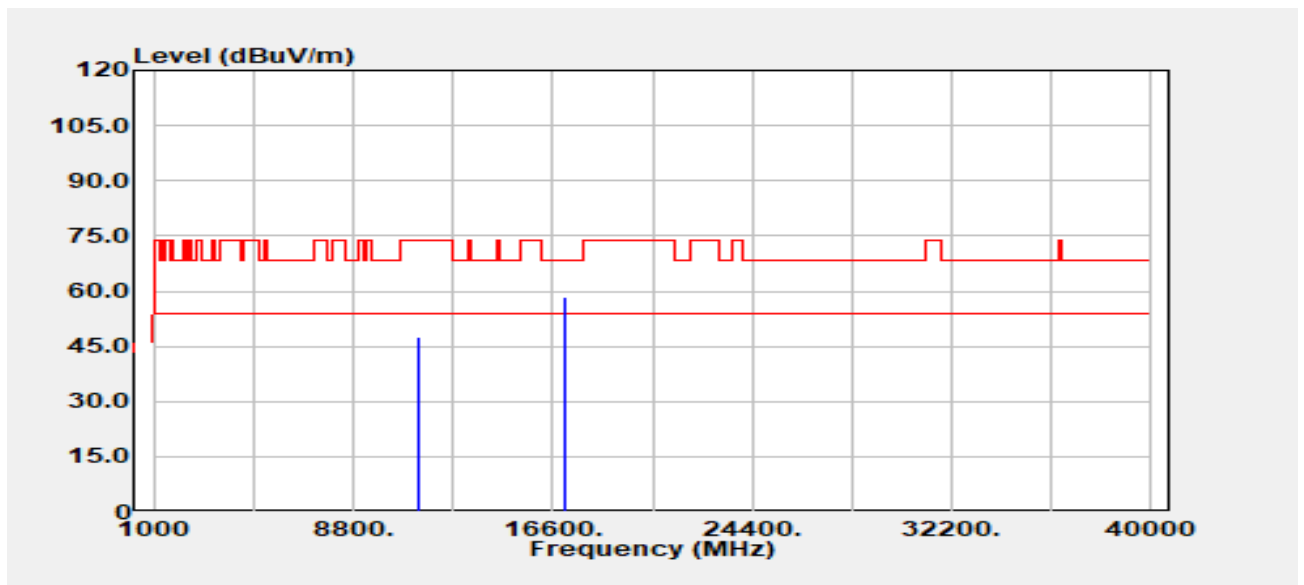


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11380.000	Peak	34.95	12.47	47.42	74.00	-26.58
11380.000	Average	24.78	12.47	37.25	54.00	-16.75
17070.000	Peak	32.63	25.70	58.34	68.20	-9.86

Report No.: TMWK2308002691KR

Page 280 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

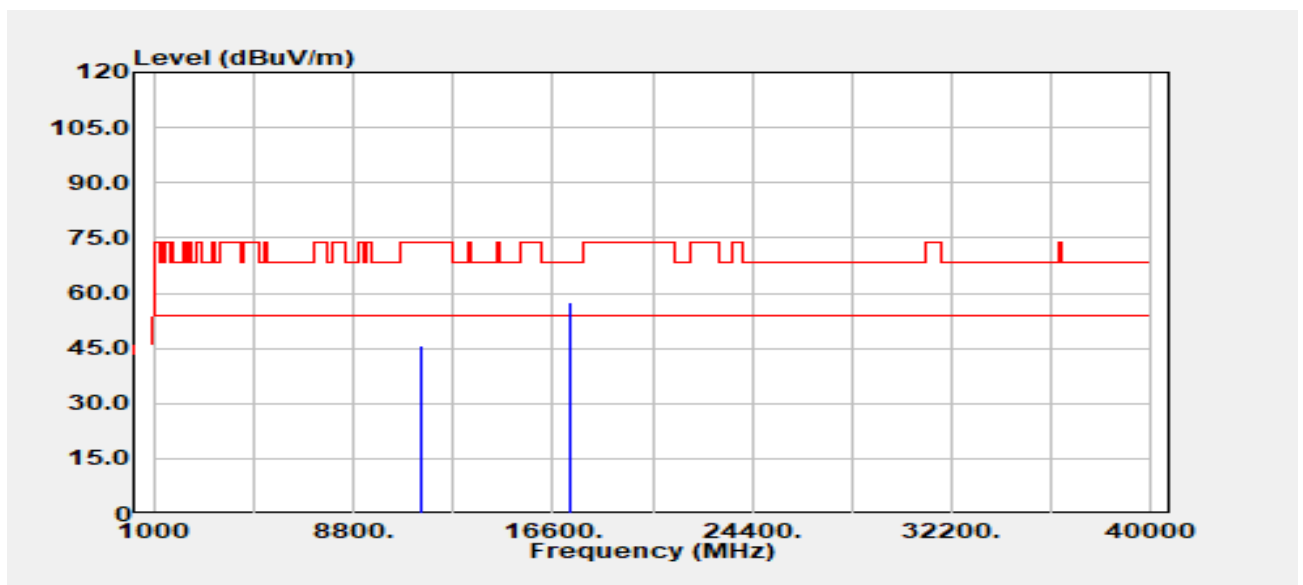


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.000	Peak	33.35	12.39	45.74	74.00	-28.26
11490.000	Average	23.35	12.39	35.74	54.00	-18.26
17235.000	Peak	31.58	26.10	57.69	68.20	-10.51

Report No.: TMWK2308002691KR

Page 281 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

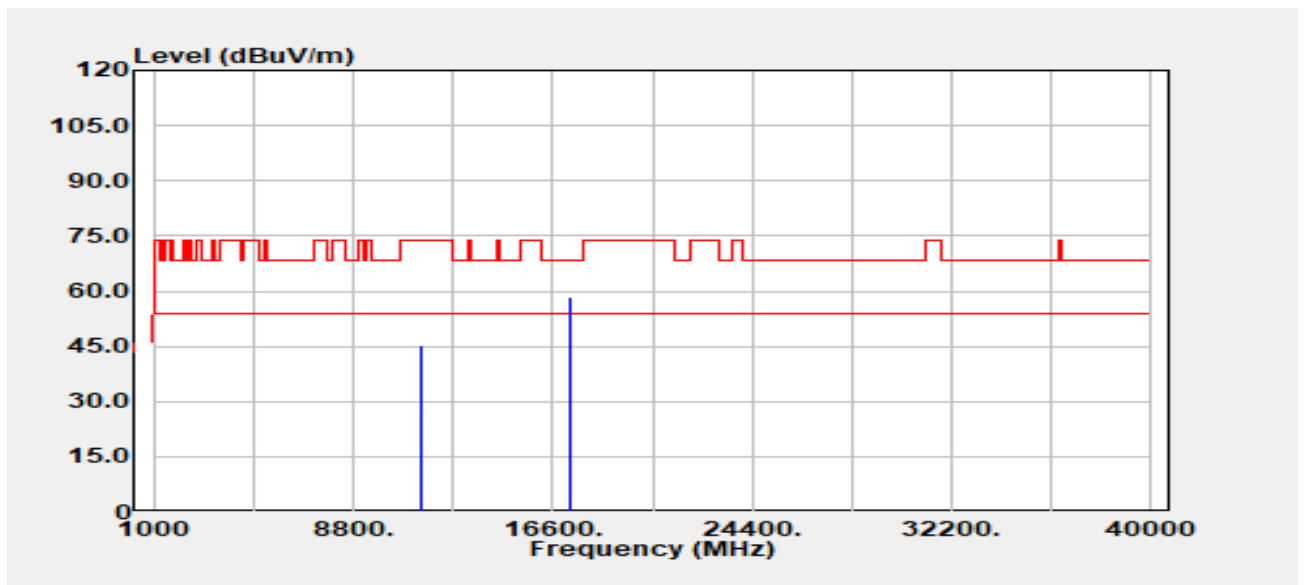


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.000	Peak	32.67	12.39	45.06	74.00	-28.94
11490.000	Average	23.60	12.39	35.99	54.00	-18.01
17235.000	Peak	32.30	26.10	58.41	68.20	-9.79

Report No.: TMWK2308002691KR

Page 282 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

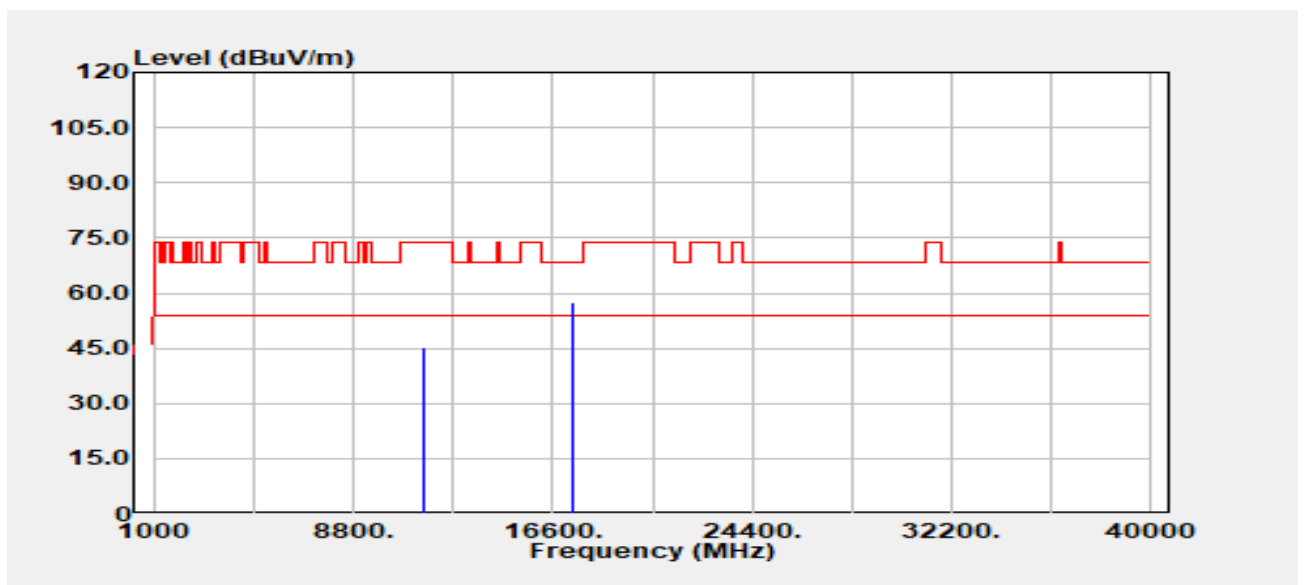


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.000	Peak	32.90	12.49	45.39	74.00	-28.61
11570.000	Average	23.29	12.49	35.78	54.00	-18.22
17355.000	Peak	31.94	25.47	57.40	68.20	-10.80

Report No.: TMWK2308002691KR

Page 283 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

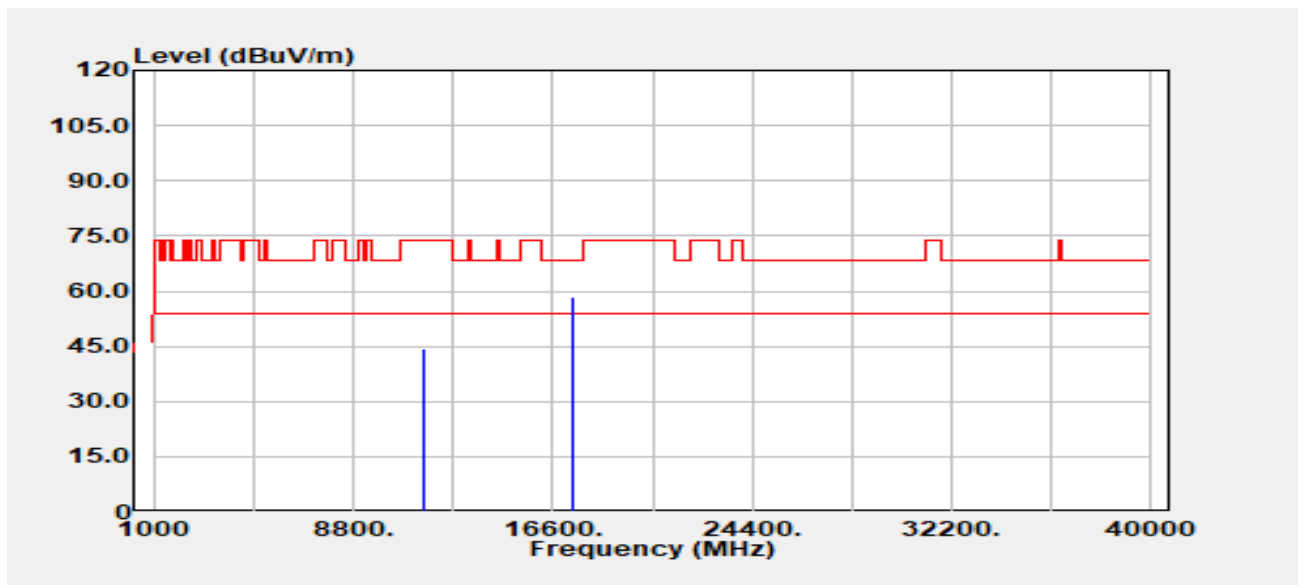


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.000	Peak	31.88	12.49	44.37	74.00	-29.63
11570.000	Average	23.25	12.49	35.74	54.00	-18.26
17355.000	Peak	33.08	25.47	58.55	68.20	-9.65

Report No.: TMWK2308002691KR

Page 284 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

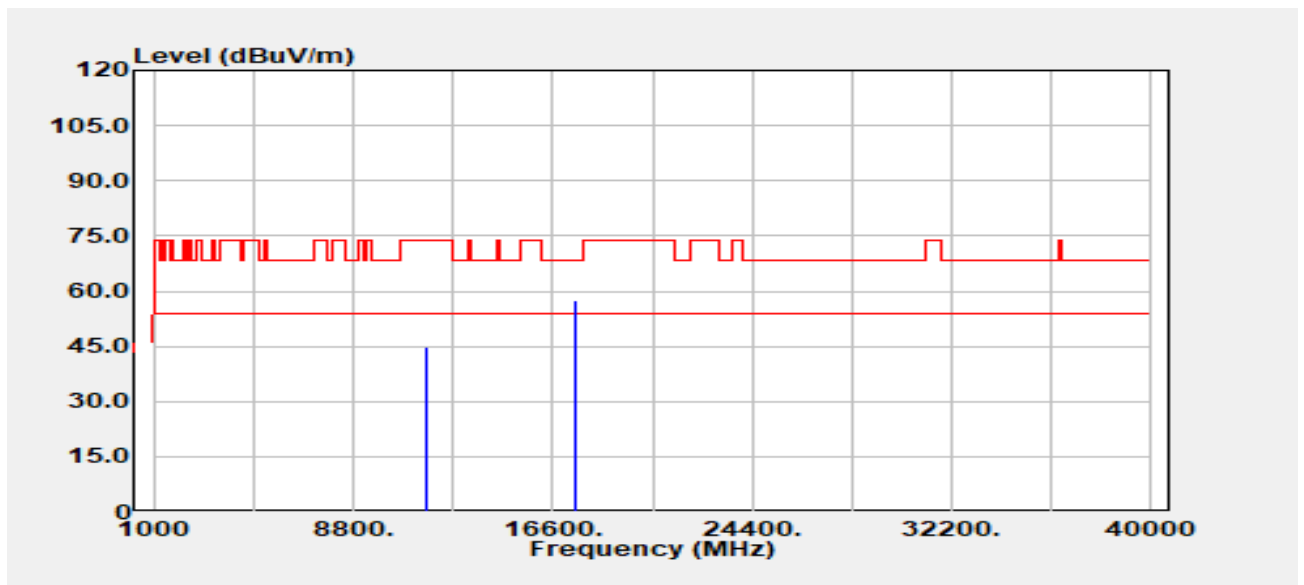


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.000	Peak	32.38	12.43	44.81	74.00	-29.19
11650.000	Average	23.39	12.43	35.82	54.00	-18.18
17475.000	Peak	32.44	25.06	57.50	68.20	-10.70

Report No.: TMWK2308002691KR

Page 285 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

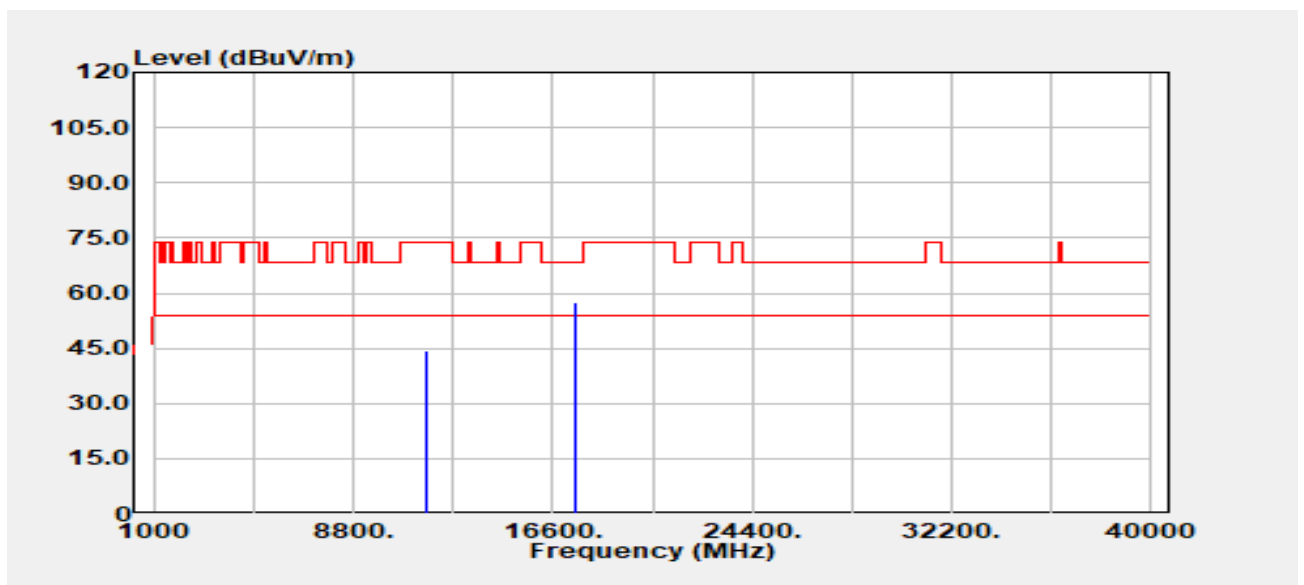


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.000	Peak	31.98	12.43	44.41	74.00	-29.59
11650.000	Average	23.12	12.43	35.54	54.00	-18.46
17475.000	Peak	32.67	25.06	57.73	68.20	-10.47

Report No.: TMWK2308002691KR

Page 286 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

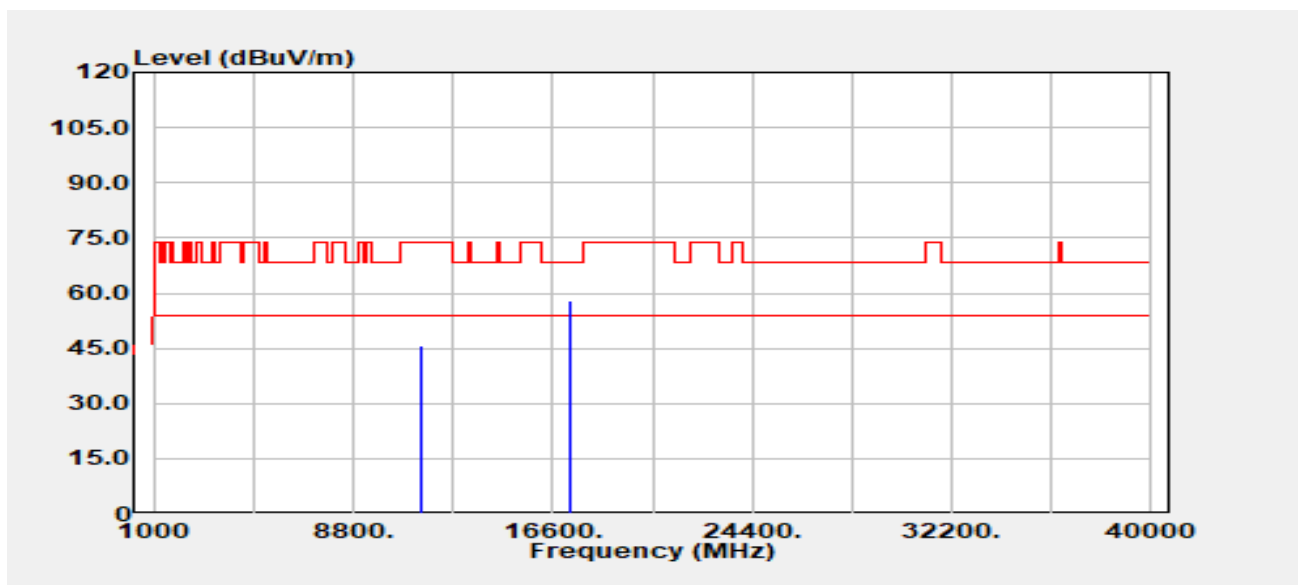


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.000	Peak	33.24	12.39	45.63	74.00	-28.37
11490.000	Average	23.49	12.39	35.88	54.00	-18.12
17235.000	Peak	31.98	26.10	58.08	68.20	-10.12

Report No.: TMWK2308002691KR

Page 287 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

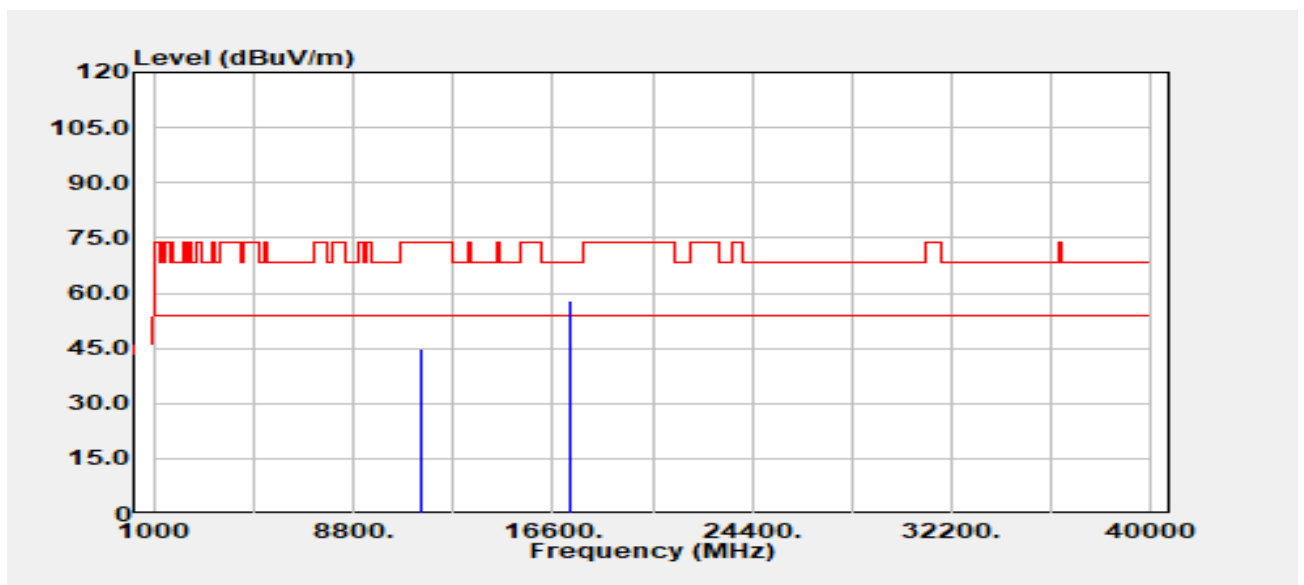


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.000	Peak	32.44	12.39	44.83	74.00	-29.17
11490.000	Average	23.47	12.39	35.86	54.00	-18.14
17235.000	Peak	31.99	26.10	58.10	68.20	-10.10

Report No.: TMWK2308002691KR

Page 288 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

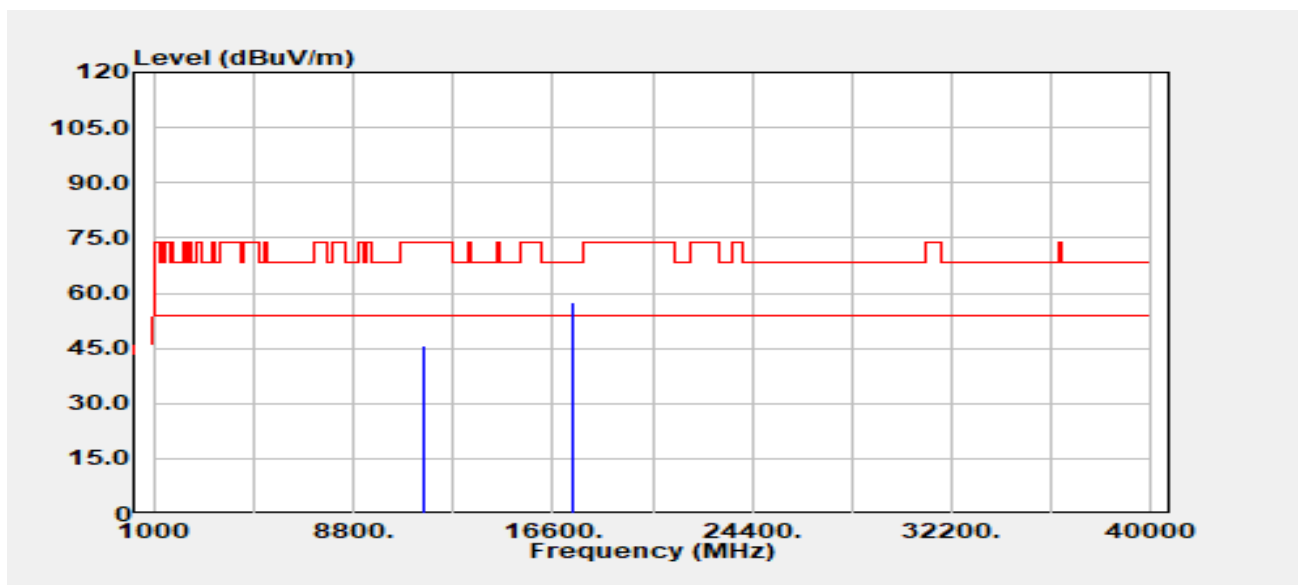


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.000	Peak	33.16	12.49	45.65	74.00	-28.35
11570.000	Average	23.34	12.49	35.83	54.00	-18.17
17355.000	Peak	32.26	25.47	57.73	68.20	-10.47

Report No.: TMWK2308002691KR

Page 289 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

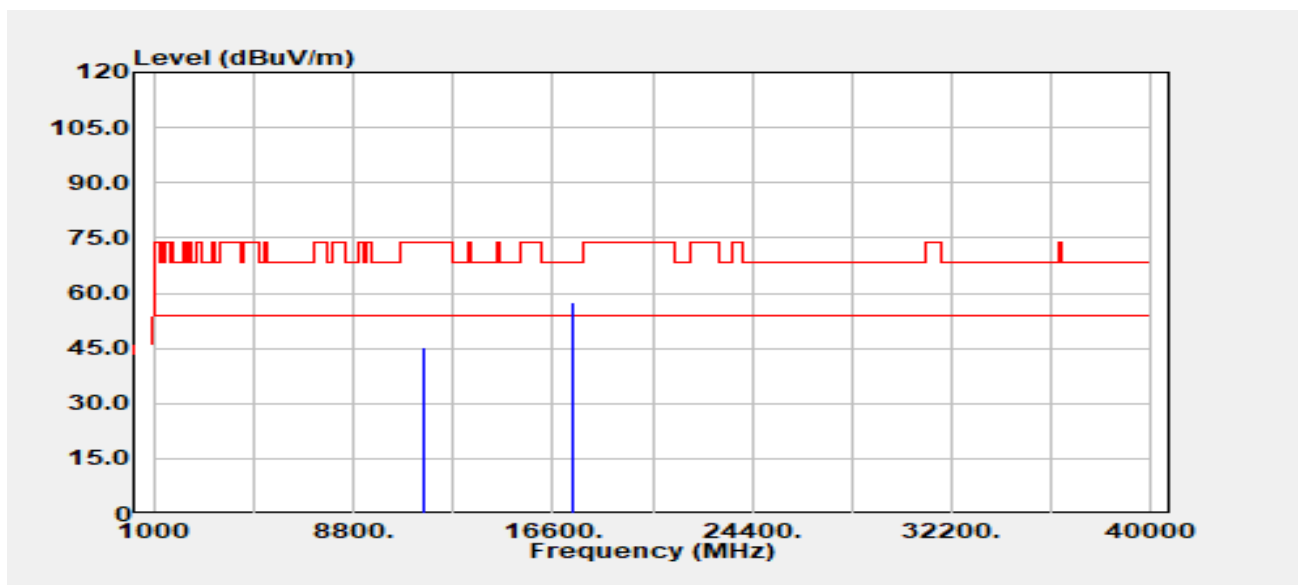


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.000	Peak	32.91	12.49	45.40	74.00	-28.60
11570.000	Average	23.30	12.49	35.79	54.00	-18.21
17355.000	Peak	32.12	25.47	57.59	68.20	-10.61

Report No.: TMWK2308002691KR

Page 290 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

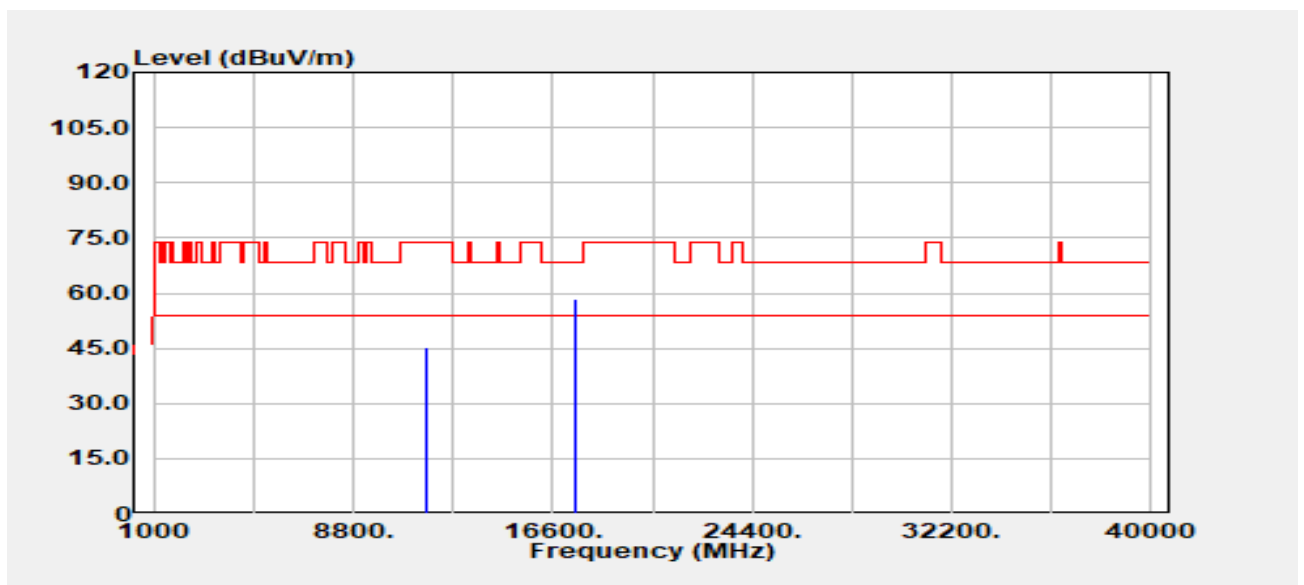


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.000	Peak	33.08	12.43	45.51	74.00	-28.49
11650.000	Average	23.31	12.43	35.74	54.00	-18.26
17475.000	Peak	33.23	25.06	58.29	68.20	-9.91

Report No.: TMWK2308002691KR

Page 291 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

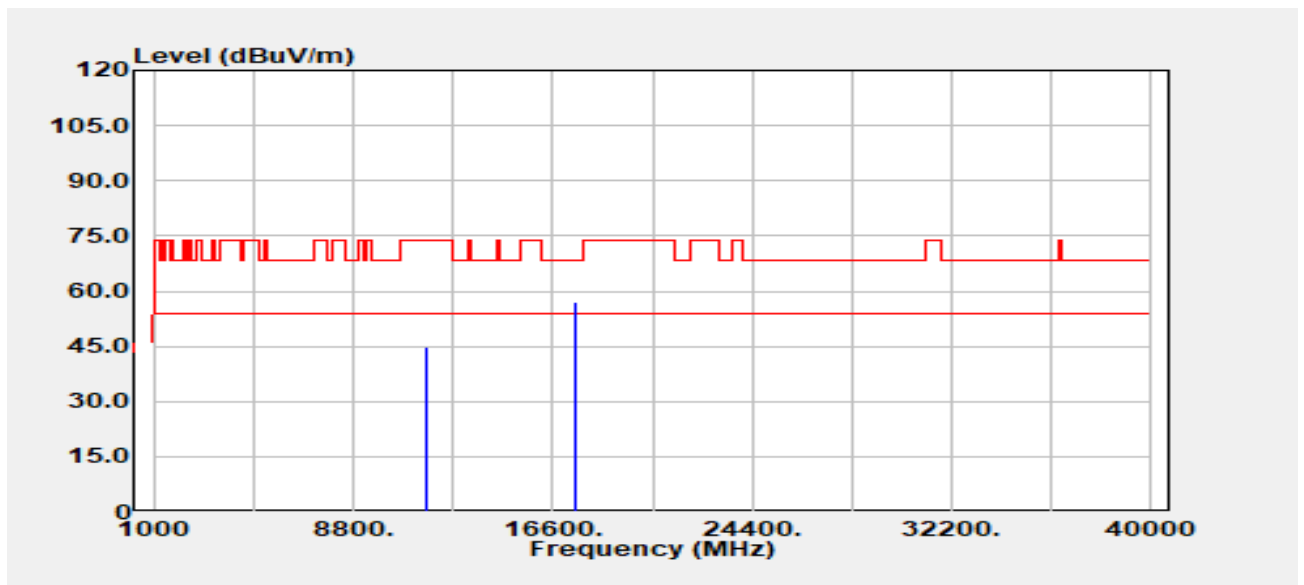


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.000	Peak	32.45	12.43	44.87	74.00	-29.13
11650.000	Average	23.39	12.43	35.82	54.00	-18.18
17475.000	Peak	32.14	25.06	57.20	68.20	-11.00

Report No.: TMWK2308002691KR

Page 292 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

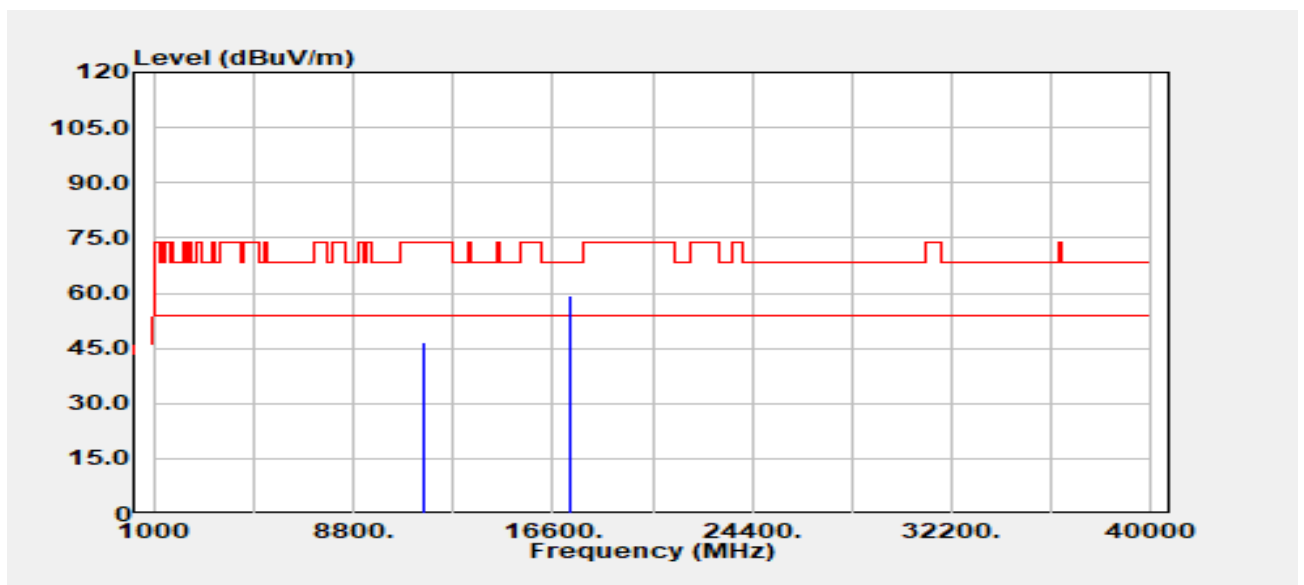


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.000	Peak	34.06	12.43	46.49	74.00	-27.51
11510.000	Average	24.26	12.43	36.69	54.00	-17.31
17265.000	Peak	33.11	26.14	59.25	68.20	-8.95

Report No.: TMWK2308002691KR

Page 293 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

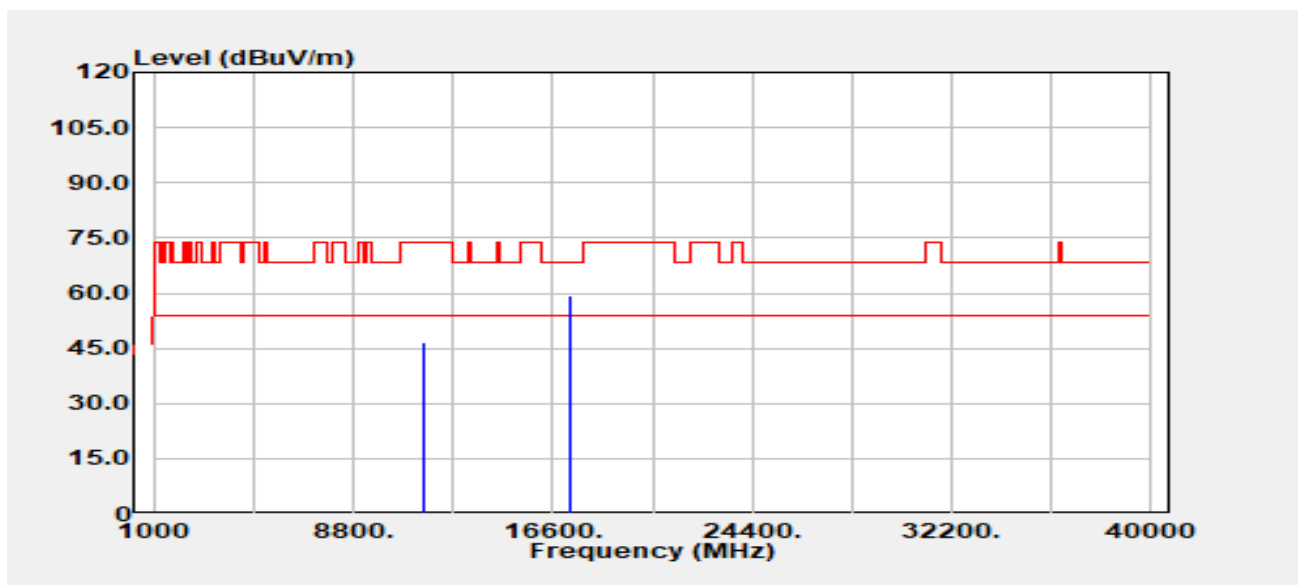


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.000	Peak	34.22	12.43	46.65	74.00	-27.35
11510.000	Average	24.75	12.43	37.18	54.00	-16.82
17265.000	Peak	33.09	26.14	59.22	68.20	-8.98

Report No.: TMWK2308002691KR

Page 294 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

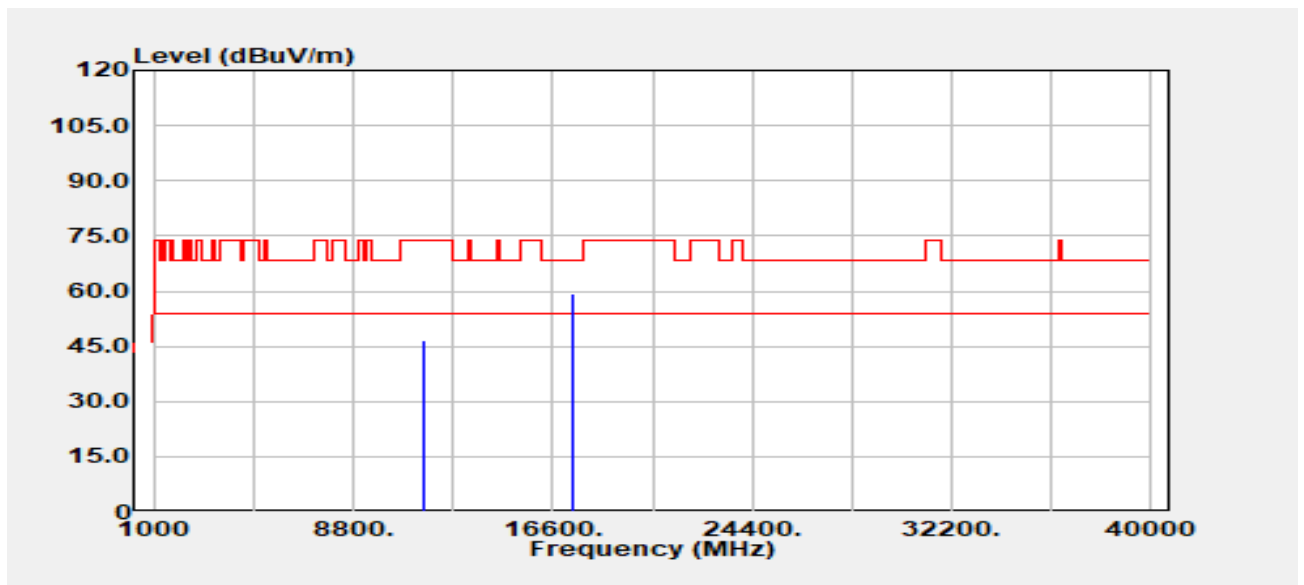


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.000	Peak	34.33	12.48	46.81	74.00	-27.19
11590.000	Average	24.66	12.48	37.14	54.00	-16.86
17385.000	Peak	33.88	25.27	59.15	68.20	-9.05

Report No.: TMWK2308002691KR

Page 295 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

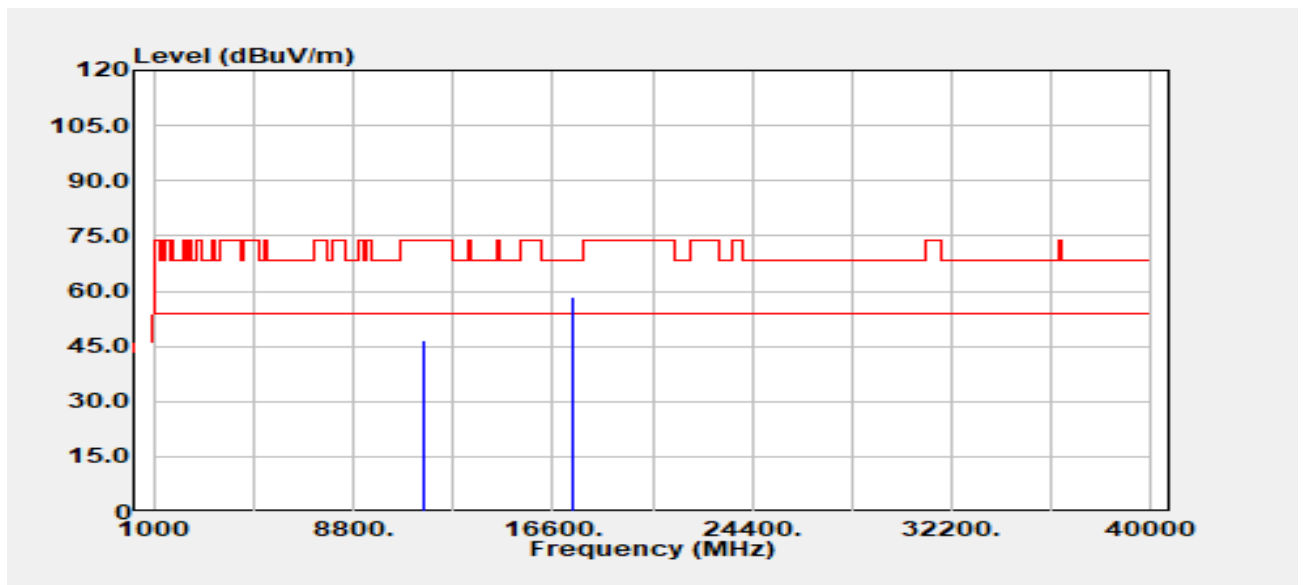


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.000	Peak	34.19	12.48	46.67	74.00	-27.33
11590.000	Average	24.79	12.48	37.27	54.00	-16.73
17385.000	Peak	33.18	25.27	58.45	68.20	-9.75

Report No.: TMWK2308002691KR

Page 296 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

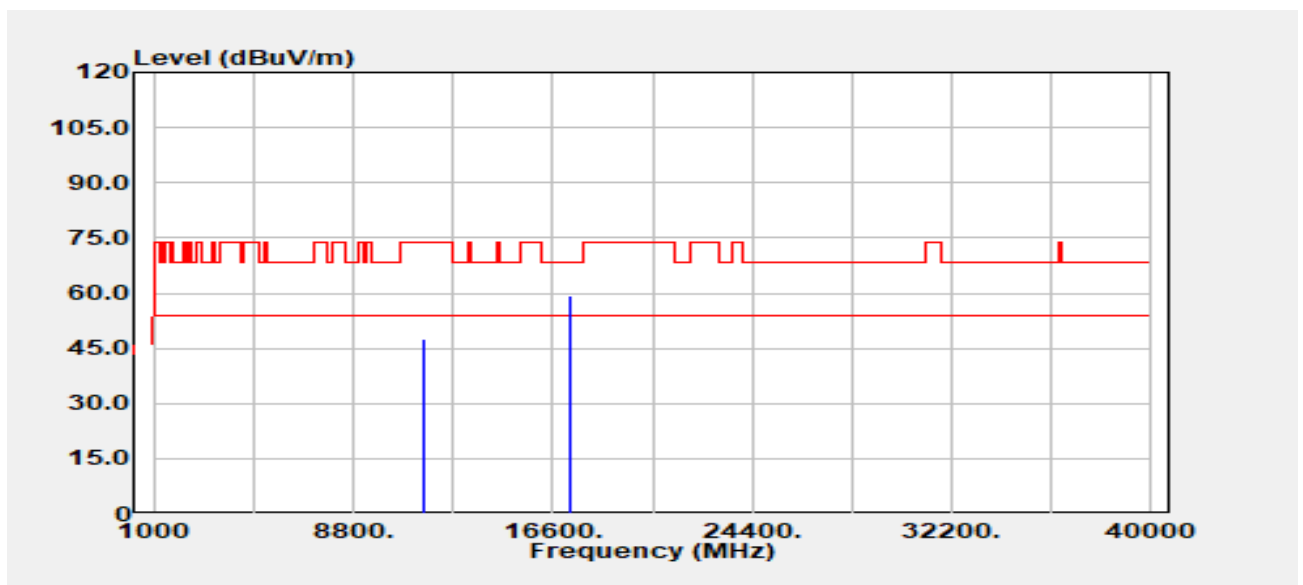


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11550.000	Peak	34.85	12.51	47.35	74.00	-26.65
11550.000	Average	24.96	12.51	37.47	54.00	-16.54
17325.000	Peak	33.68	25.79	59.47	68.20	-8.73

Report No.: TMWK2308002691KR

Page 297 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

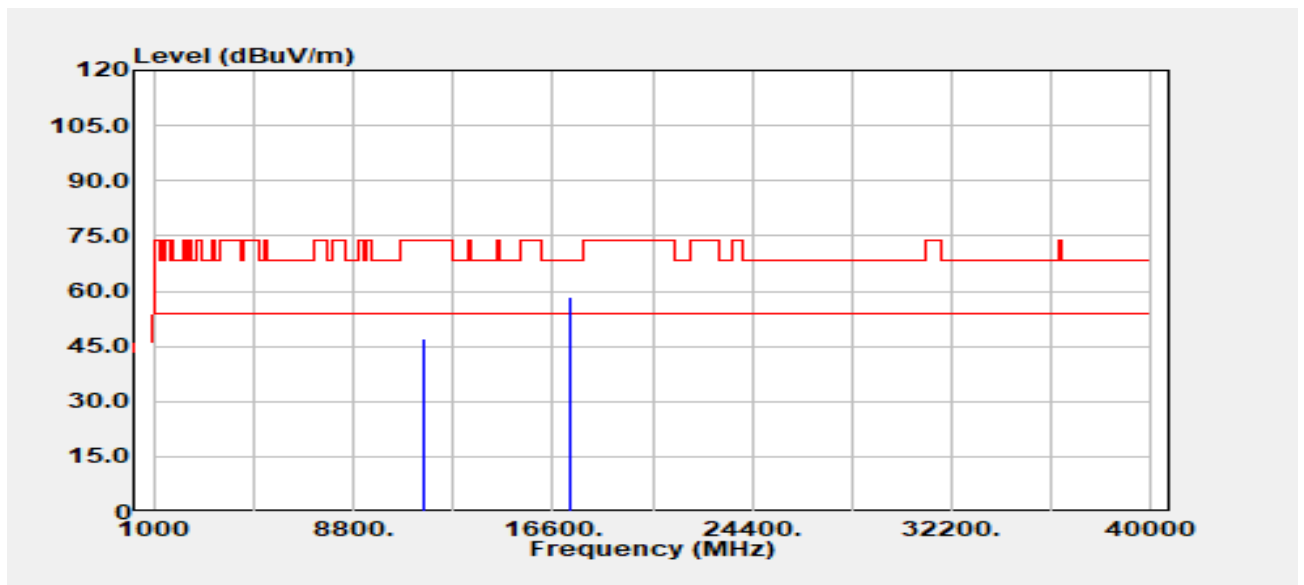

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11550.000	Peak	34.71	12.51	47.21	74.00	-26.79
11550.000	Average	24.79	12.51	37.30	54.00	-16.71
17325.000	Peak	32.74	25.79	58.53	68.20	-9.67

TX Test Data: (IC_Below 1GHz)


Project Number	:TM-2308000057P	Test Date	:2023-09-01
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.6/58
Frequency	:5210 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray.Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

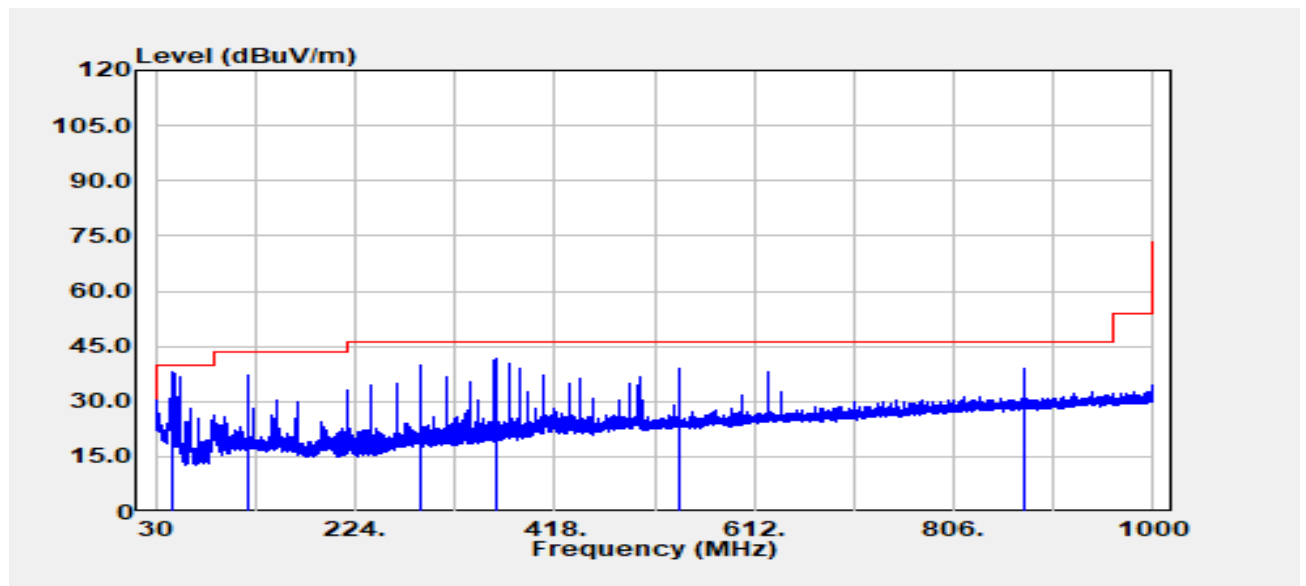

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
46.490	Peak	52.09	-14.14	37.96	40.00	-2.04
119.968	Peak	46.44	-9.21	37.23	43.50	-6.27
288.020	Peak	48.69	-8.79	39.90	46.00	-6.10
360.043	Peak	48.84	-7.18	41.67	46.00	-4.33
539.978	Peak	42.01	-2.85	39.15	46.00	-6.85
874.991	Peak	36.60	2.57	39.17	46.00	-6.83

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

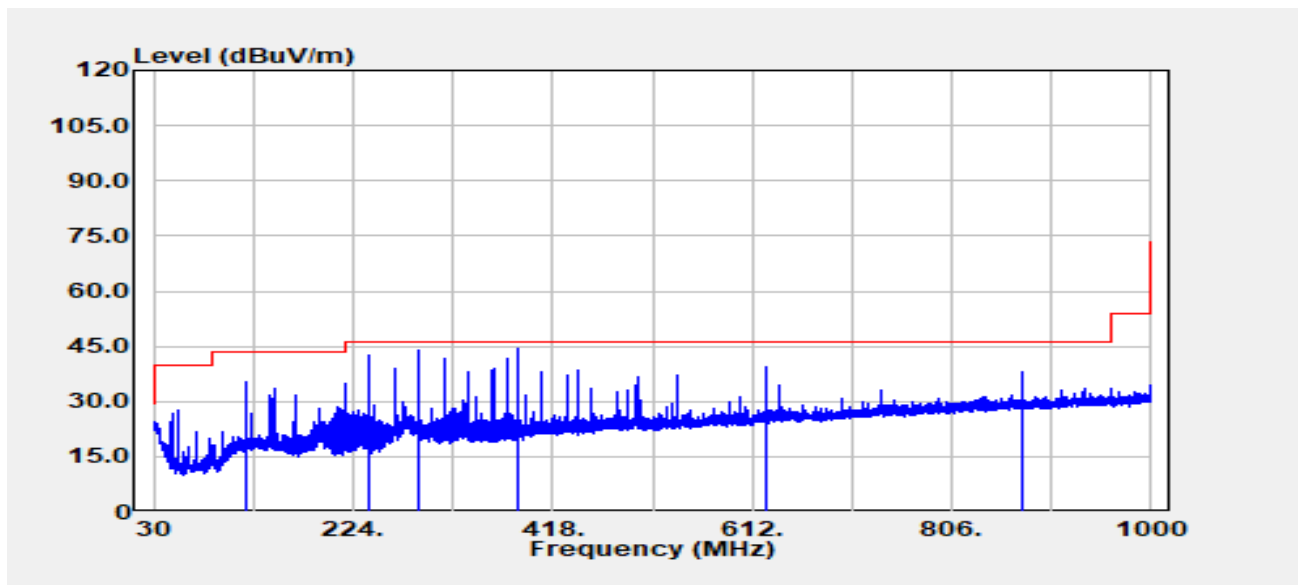

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
119.968	Peak	44.68	-9.21	35.47	43.50	-8.03
240.005	Peak	53.26	-10.75	42.51	46.00	-3.49
288.020	Peak	52.80	-8.79	44.01	46.00	-1.99
384.050	Peak	50.88	-6.48	44.40	46.00	-1.60
624.974	Peak	40.66	-1.16	39.50	46.00	-6.50
874.991	Peak	35.65	2.57	38.22	46.00	-7.78

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

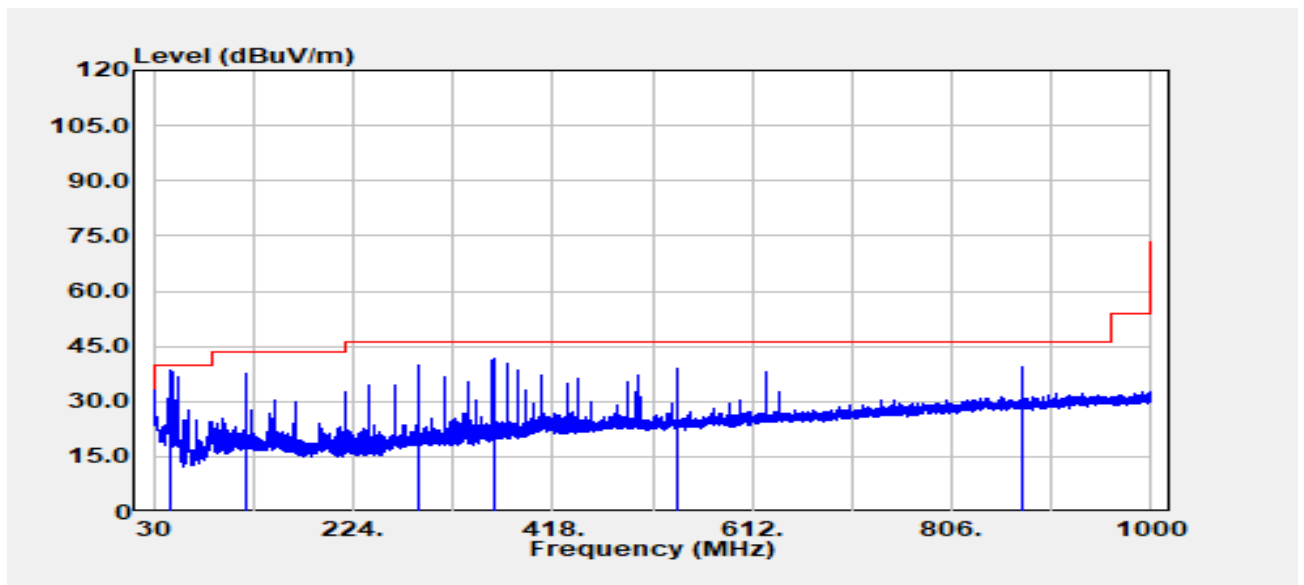

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
46.611	Peak	52.60	-14.25	38.36	40.00	-1.64
119.968	Peak	46.85	-9.21	37.64	43.50	-5.86
288.020	Peak	48.61	-8.79	39.82	46.00	-6.18
360.043	Peak	48.88	-7.18	41.70	46.00	-4.30
539.978	Peak	41.86	-2.85	39.01	46.00	-6.99
874.991	Peak	36.81	2.57	39.38	46.00	-6.62

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

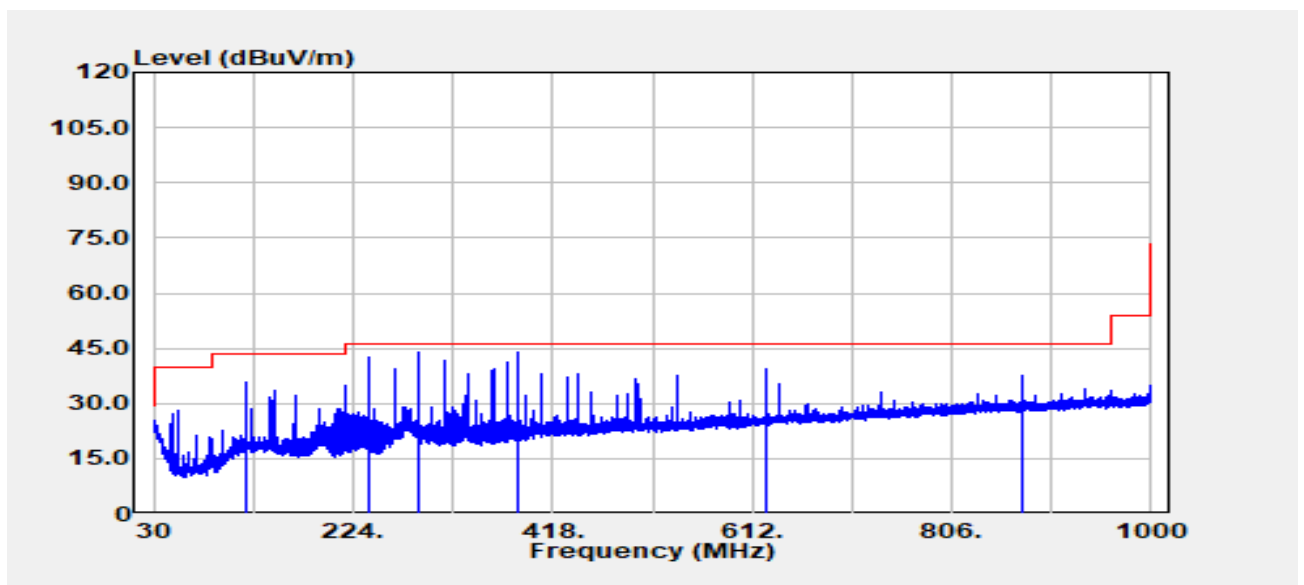

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
119.968	Peak	44.83	-9.21	35.62	43.50	-7.88
240.005	Peak	53.23	-10.75	42.48	46.00	-3.52
288.020	Peak	52.79	-8.79	44.00	46.00	-2.00
384.050	Peak	50.42	-6.48	43.94	46.00	-2.06
624.974	Peak	40.54	-1.16	39.38	46.00	-6.62
874.991	Peak	34.82	2.57	37.39	46.00	-8.61

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

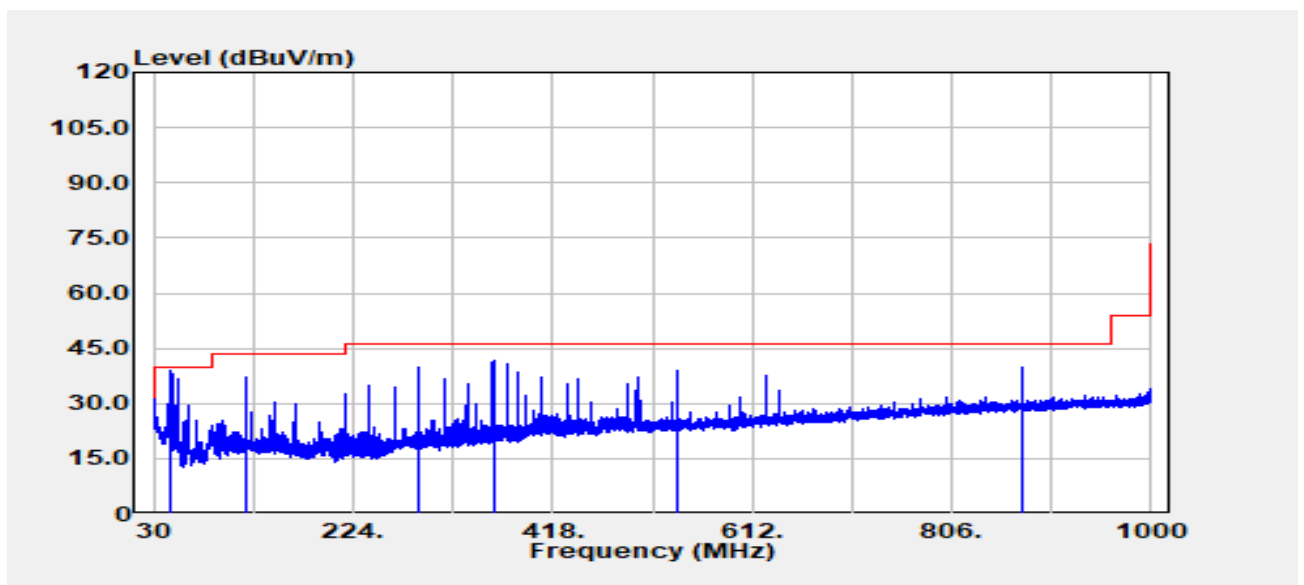


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
46.369	Peak	52.78	-14.03	38.76	40.00	-1.24
119.968	Peak	46.39	-9.21	37.18	43.50	-6.32
288.020	Peak	48.54	-8.79	39.75	46.00	-6.25
360.043	Peak	48.69	-7.18	41.52	46.00	-4.48
539.978	Peak	41.96	-2.85	39.11	46.00	-6.89
874.991	Peak	37.11	2.57	39.68	46.00	-6.32

Report No.: TMWK2308002691KR

Page 303 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

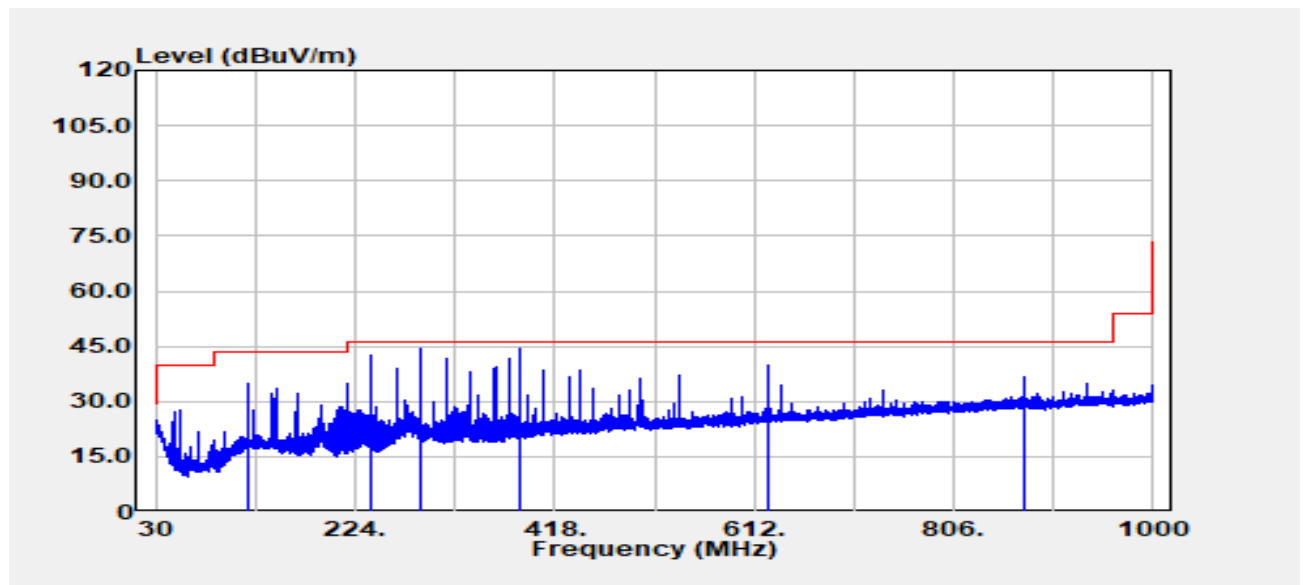

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
119.968	Peak	44.17	-9.21	34.96	43.50	-8.54
240.005	Peak	53.49	-10.75	42.74	46.00	-3.26
288.020	Peak	52.99	-8.79	44.20	46.00	-1.80
384.050	Peak	50.74	-6.48	44.27	46.00	-1.73
624.974	Peak	40.90	-1.16	39.74	46.00	-6.26
874.991	Peak	34.17	2.57	36.74	46.00	-9.26

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

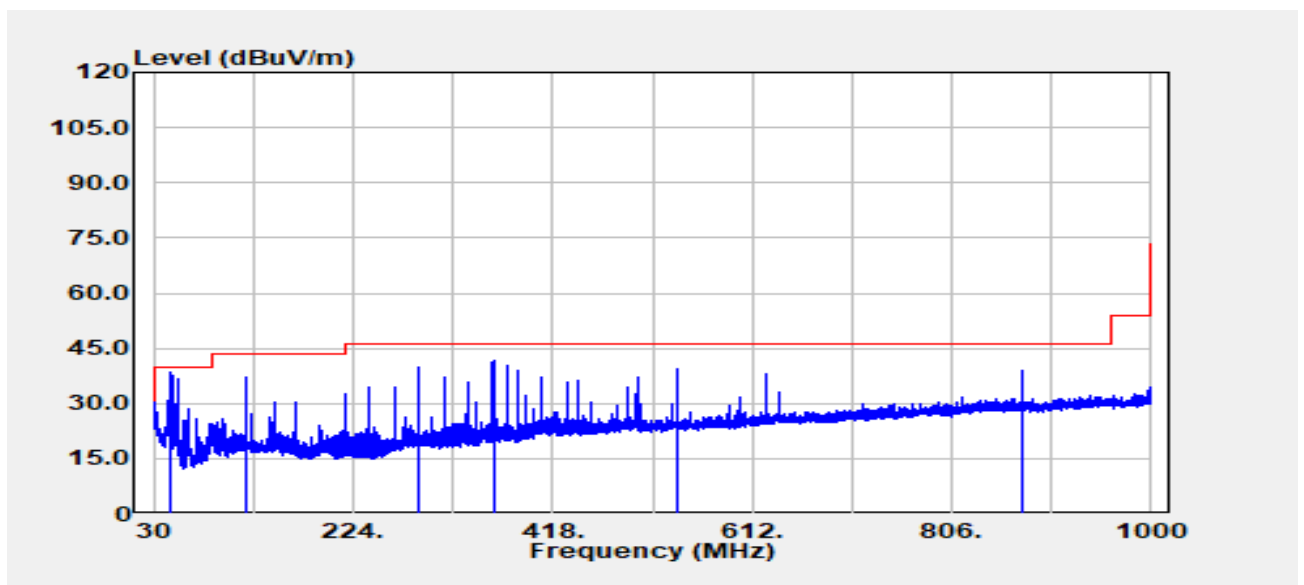

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
46.611	Peak	52.65	-14.25	38.40	40.00	-1.60
119.968	Peak	46.51	-9.21	37.30	43.50	-6.20
288.020	Peak	48.71	-8.79	39.93	46.00	-6.07
360.043	Peak	48.72	-7.18	41.54	46.00	-4.46
539.978	Peak	42.02	-2.85	39.17	46.00	-6.83
874.991	Peak	36.37	2.57	38.94	46.00	-7.06

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

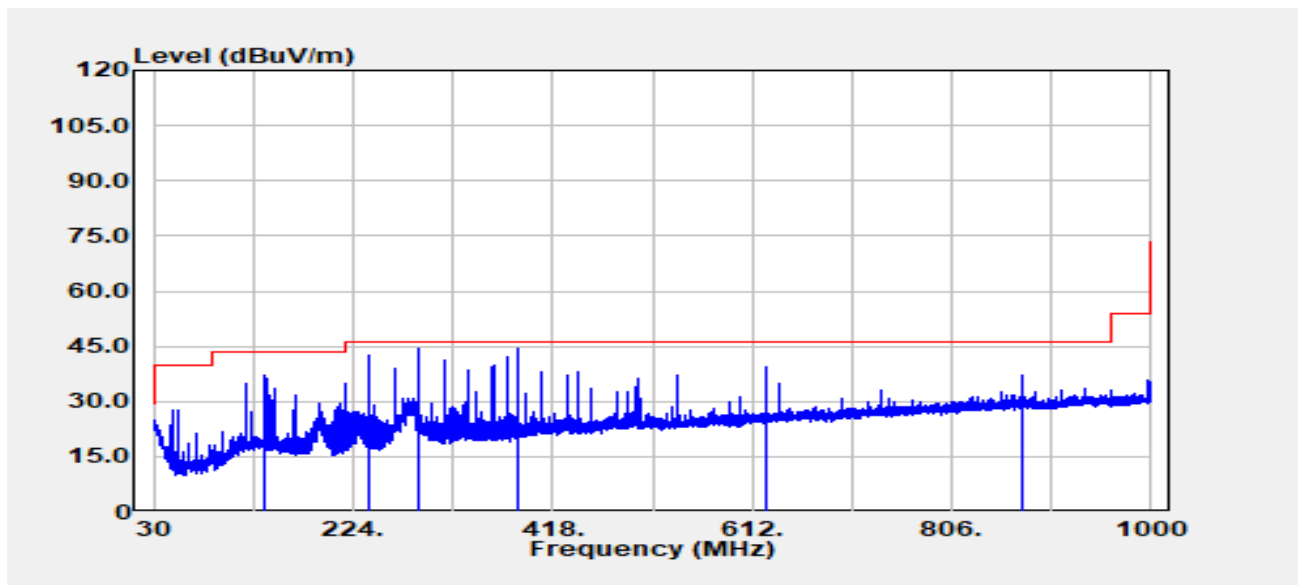

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
138.883	Peak	46.80	-9.86	36.94	43.50	-6.56
240.005	Peak	53.52	-10.75	42.77	46.00	-3.23
288.020	Peak	53.09	-8.79	44.30	46.00	-1.70
384.050	Peak	50.63	-6.48	44.15	46.00	-1.85
624.974	Peak	40.70	-1.16	39.53	46.00	-6.47
874.991	Peak	34.71	2.57	37.28	46.00	-8.72

TX Test Data: (IC_Above 1GHz)


Project Number	:TM-2308000057P	Test Date	:2023-08-31
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/57
Frequency	:5180 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray.Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

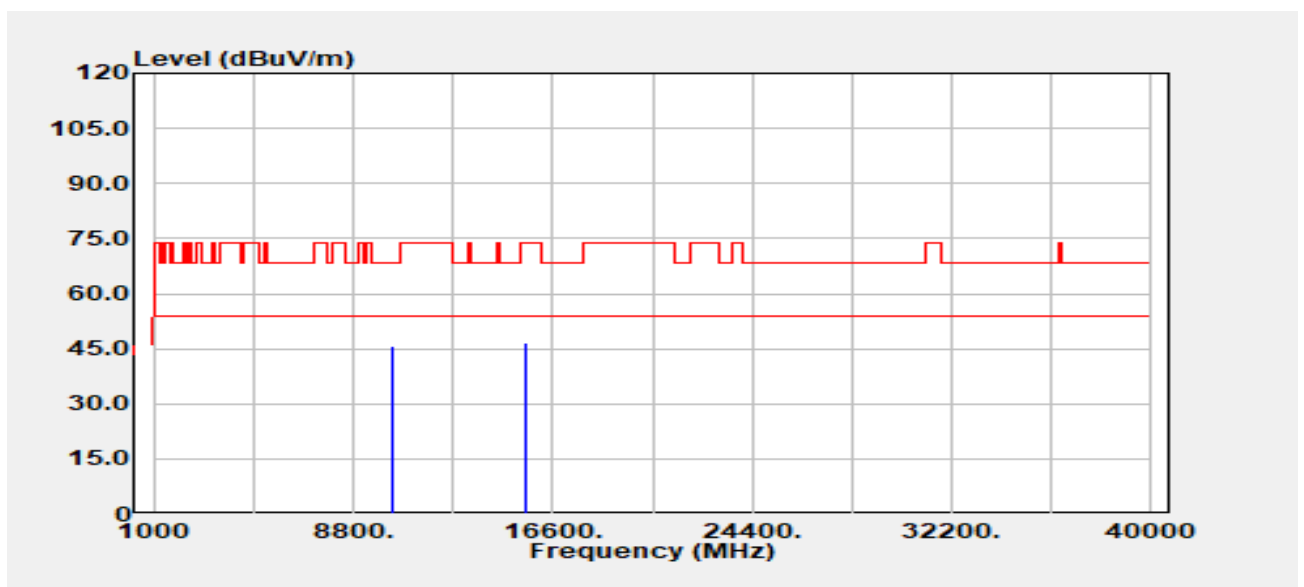

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.000	Peak	34.62	11.26	45.88	68.20	-22.32
15540.000	Peak	34.31	12.38	46.69	74.00	-27.31
15540.000	Average	24.75	12.38	37.13	54.00	-16.87

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

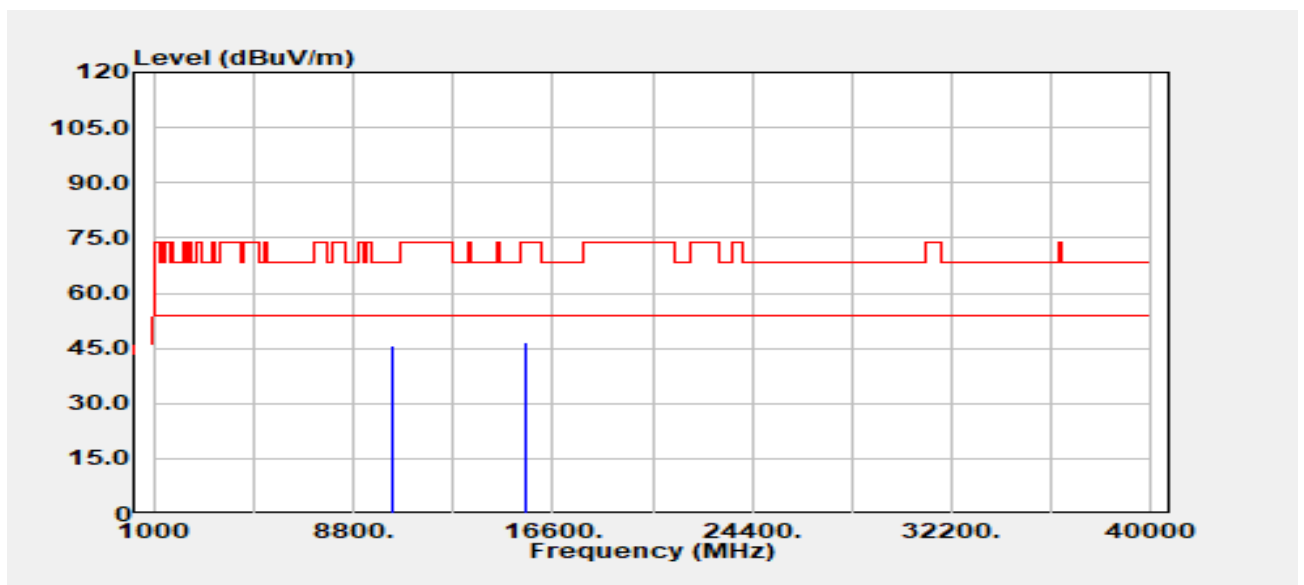


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.000	Peak	34.63	11.26	45.90	68.20	-22.30
15540.000	Peak	34.33	12.38	46.71	74.00	-27.29
15540.000	Average	24.72	12.38	37.10	54.00	-16.90

Report No.: TMWK2308002691KR

Page 308 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

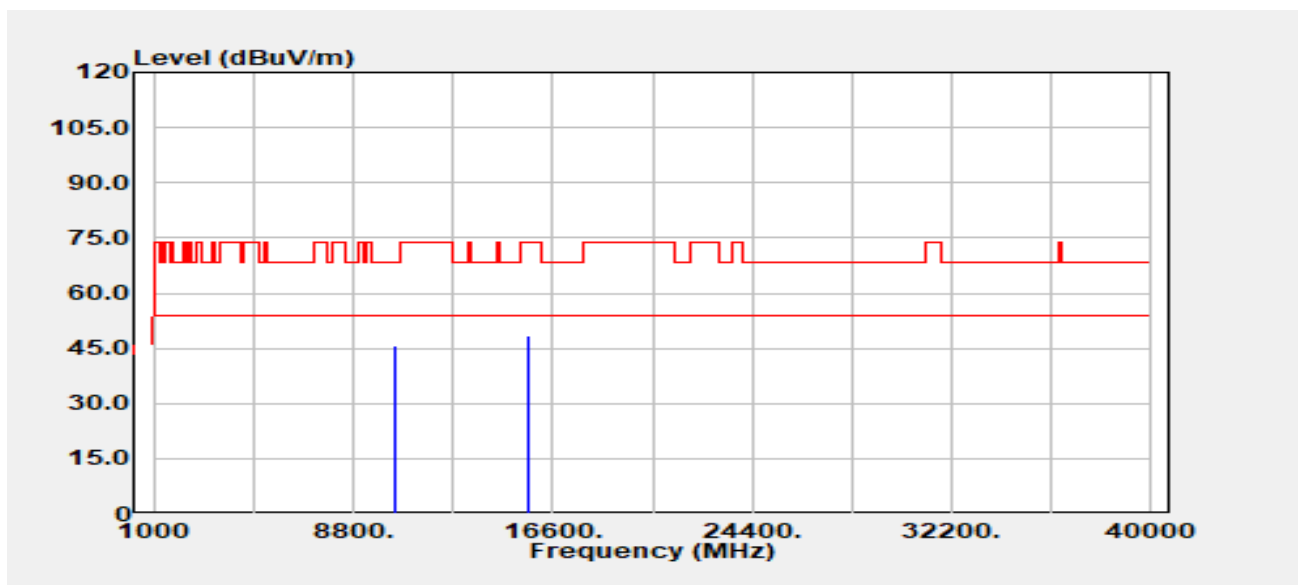


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.000	Peak	34.53	11.25	45.78	68.20	-22.42
15660.000	Peak	34.75	13.53	48.28	74.00	-25.72
15660.000	Average	24.86	13.53	38.38	54.00	-15.62

Report No.: TMWK2308002691KR

Page 309 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

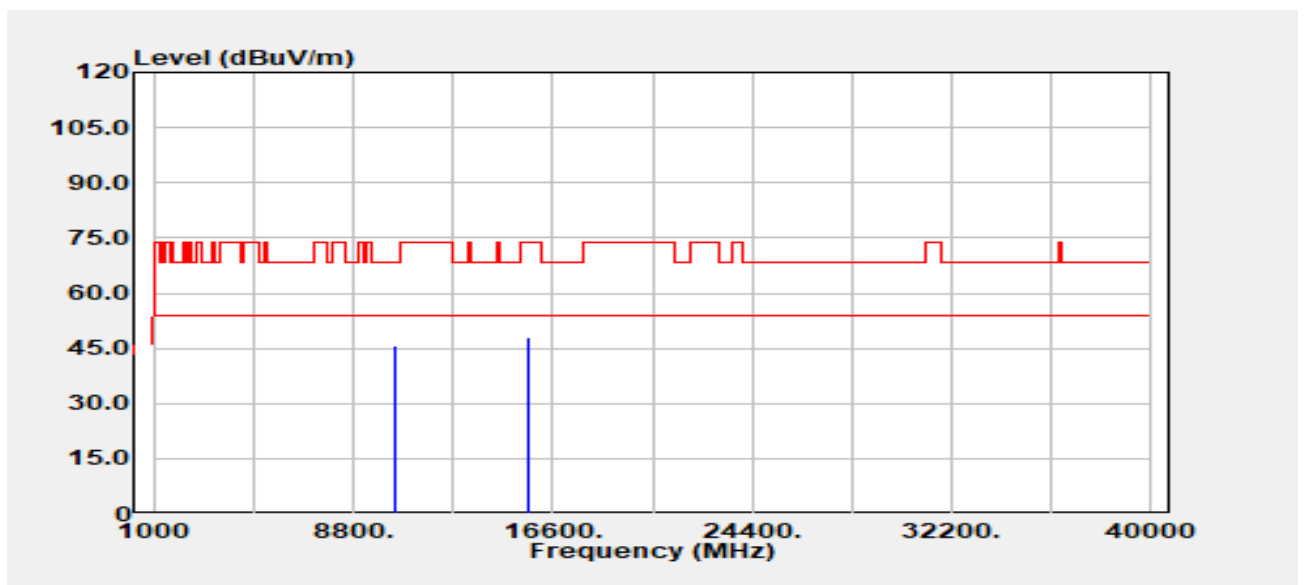


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.000	Peak	34.31	11.25	45.56	68.20	-22.64
15660.000	Peak	34.36	13.53	47.89	74.00	-26.11
15660.000	Average	24.98	13.53	38.51	54.00	-15.49

Report No.: TMWK2308002691KR

Page 310 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

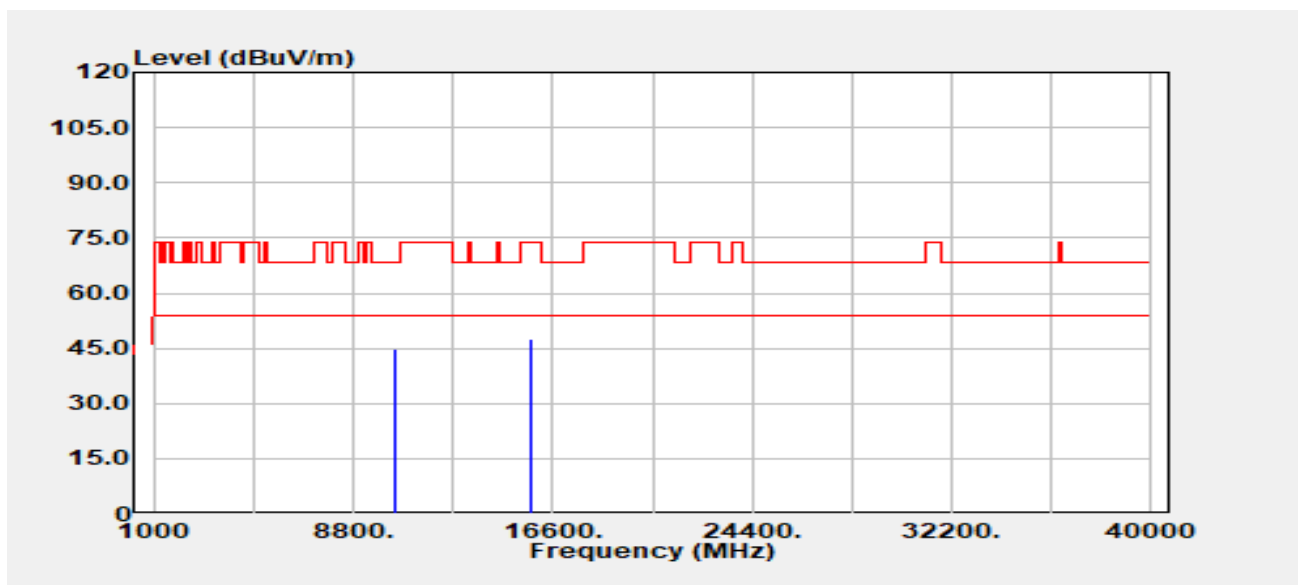


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.000	Peak	33.29	11.35	44.64	68.20	-23.56
15720.000	Peak	33.55	14.11	47.66	74.00	-26.34
15720.000	Average	24.45	14.11	38.55	54.00	-15.45

Report No.: TMWK2308002691KR

Page 311 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

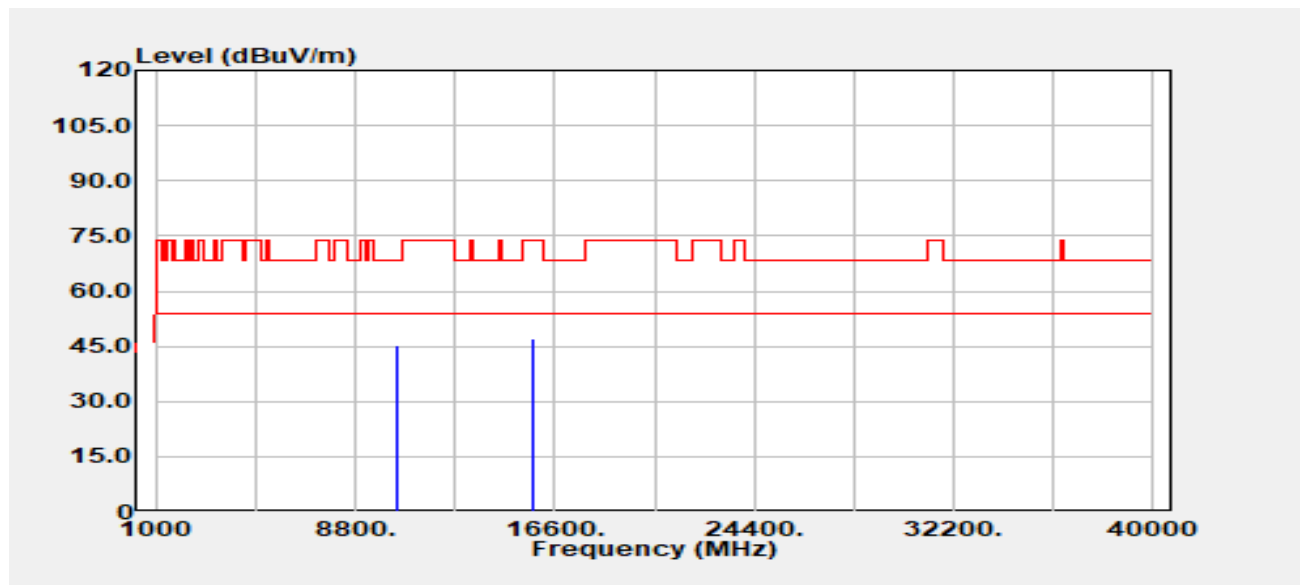


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.000	Peak	33.99	11.35	45.35	68.20	-22.85
15720.000	Peak	33.16	14.11	47.26	74.00	-26.74
15720.000	Average	24.34	14.11	38.45	54.00	-15.55

Report No.: TMWK2308002691KR

Page 312 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

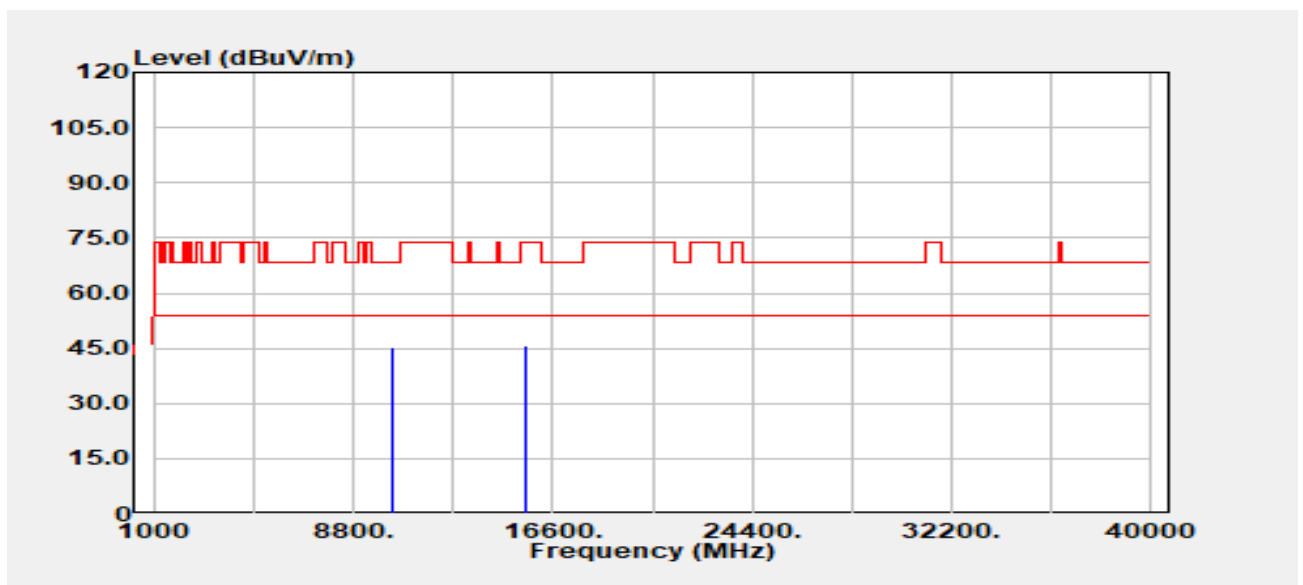


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.000	Peak	33.81	11.26	45.07	68.20	-23.13
15540.000	Peak	33.28	12.38	45.65	74.00	-28.35
15540.000	Average	24.05	12.38	36.43	54.00	-17.57

Report No.: TMWK2308002691KR

Page 313 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

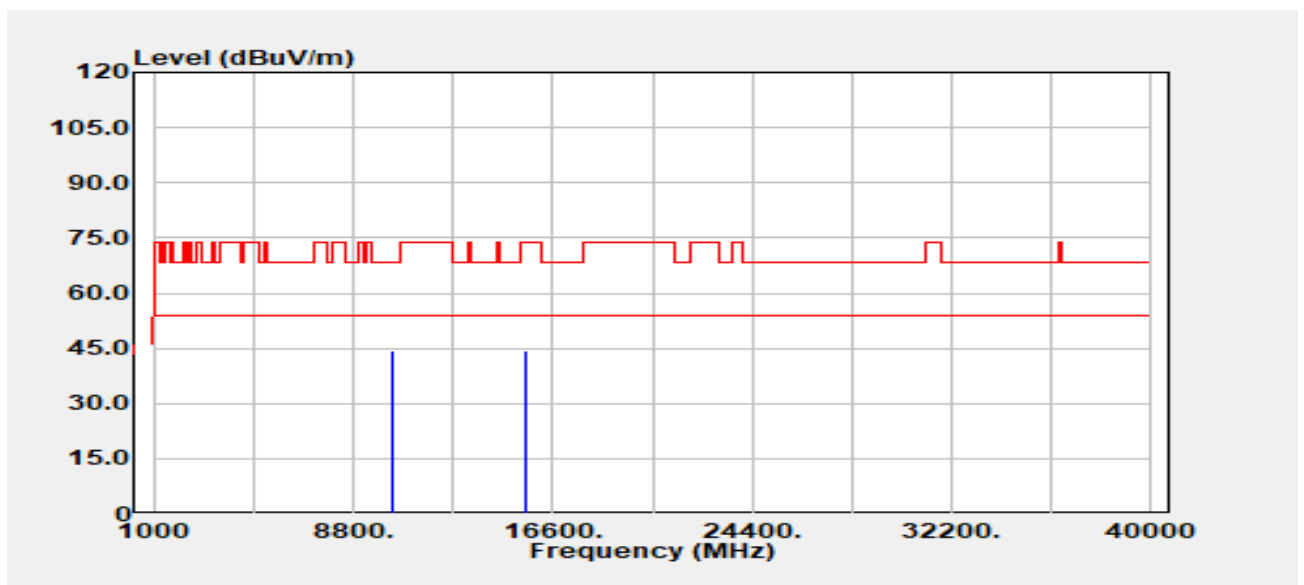

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.000	Peak	33.22	11.26	44.48	68.20	-23.72
15540.000	Peak	32.21	12.38	44.59	74.00	-29.41
15540.000	Average	24.09	12.38	36.47	54.00	-17.53

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

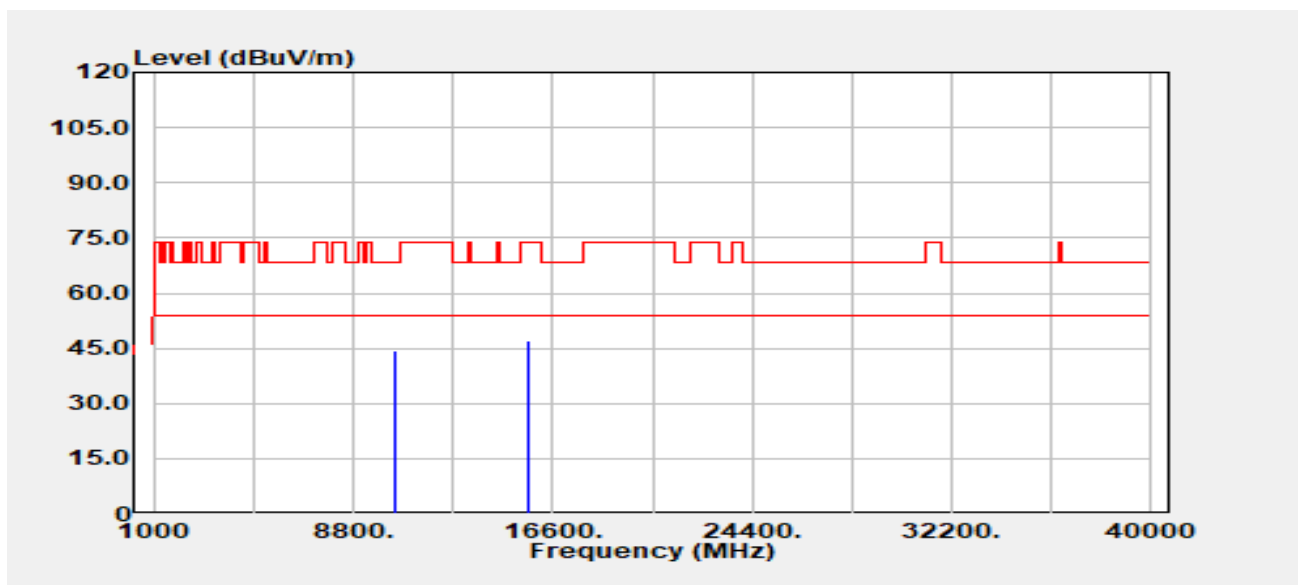


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.000	Peak	33.32	11.25	44.57	68.20	-23.63
15660.000	Peak	33.41	13.53	46.94	74.00	-27.06
15660.000	Average	24.13	13.53	37.65	54.00	-16.35

Report No.: TMWK2308002691KR

Page 315 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

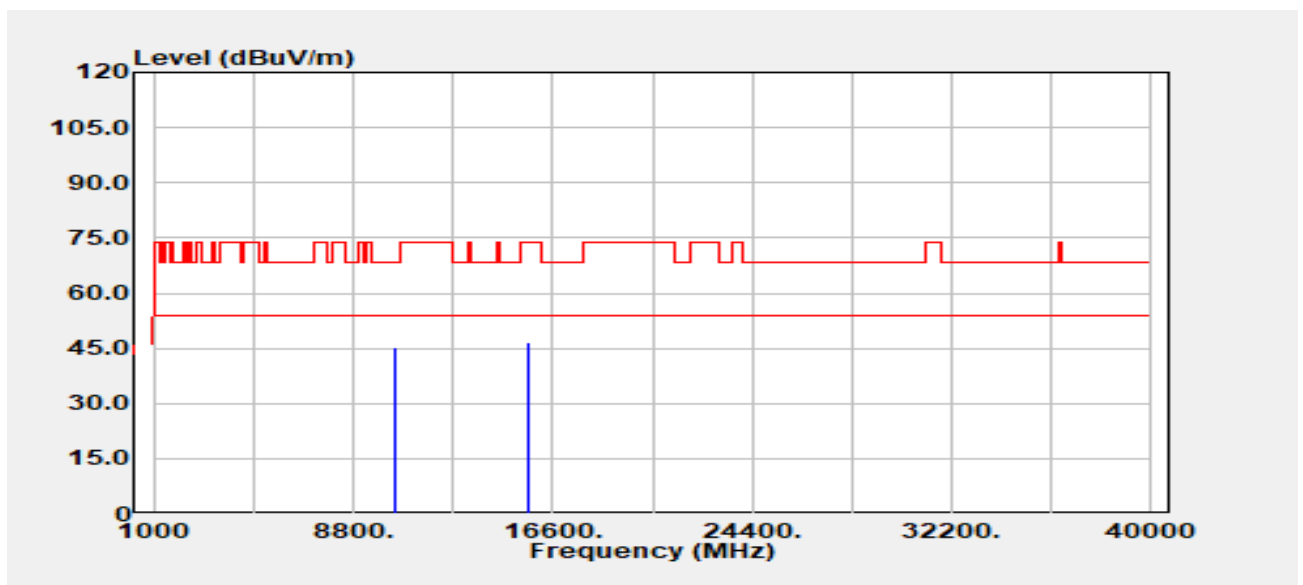


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.000	Peak	34.22	11.25	45.47	68.20	-22.73
15660.000	Peak	33.09	13.53	46.62	74.00	-27.39
15660.000	Average	24.03	13.53	37.55	54.00	-16.45

Report No.: TMWK2308002691KR

Page 316 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

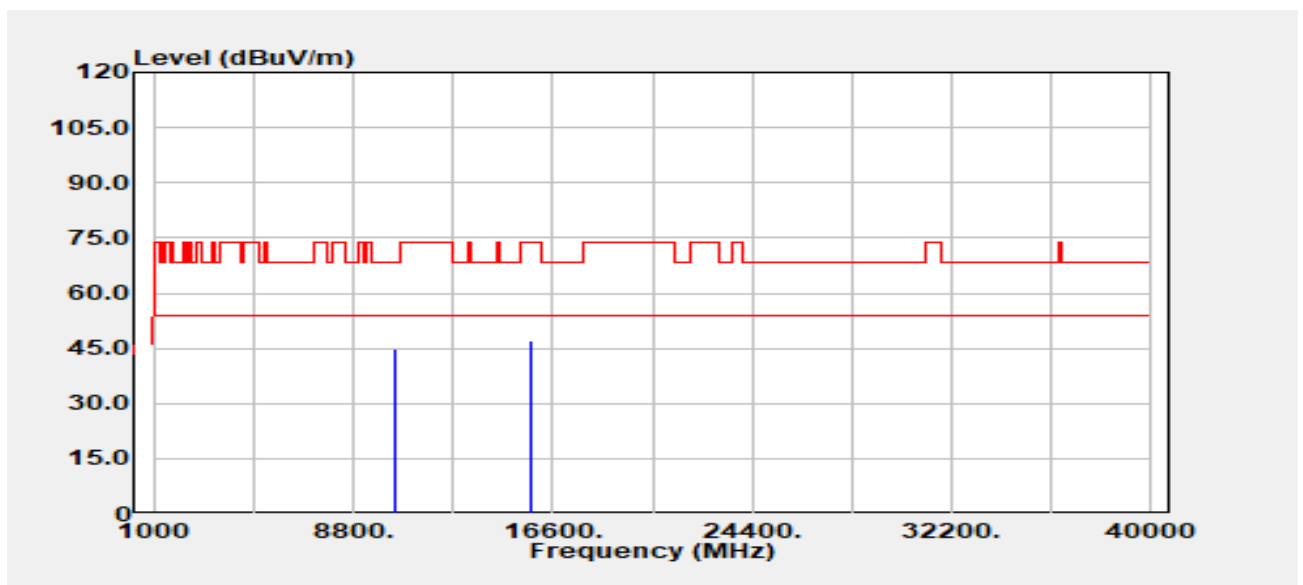

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.000	Peak	33.47	11.35	44.83	68.20	-23.37
15720.000	Peak	32.98	14.11	47.09	74.00	-26.91
15720.000	Average	23.66	14.11	37.77	54.00	-16.23

Project Number :TM-2308000057P
Operation Band :802.11n20/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

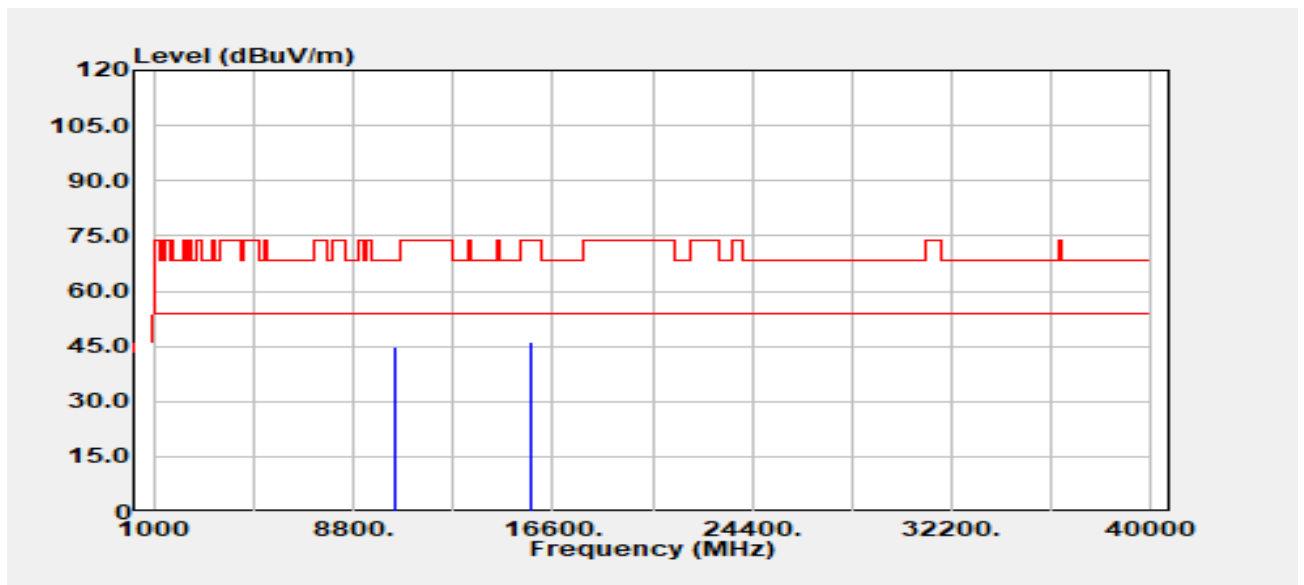


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.000	Peak	33.50	11.35	44.85	68.20	-23.35
15720.000	Peak	32.15	14.11	46.26	74.00	-27.74
15720.000	Average	23.67	14.11	37.78	54.00	-16.22

Report No.: TMWK2308002691KR

Page 318 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

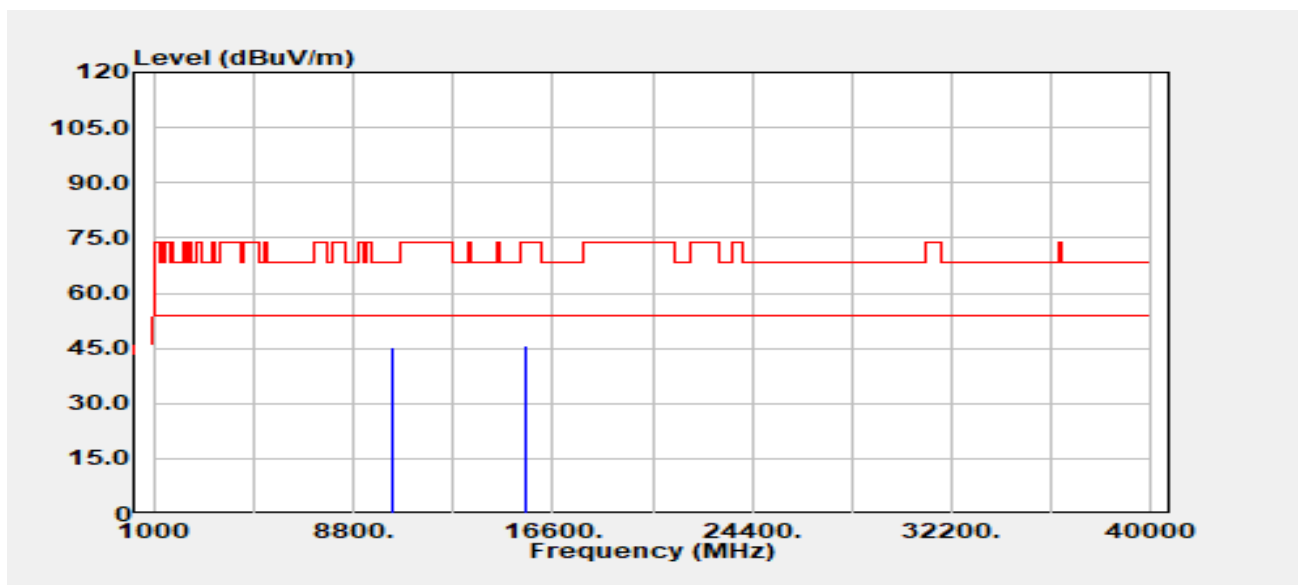


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.000	Peak	33.91	11.22	45.13	68.20	-23.07
15570.000	Peak	33.26	12.41	45.67	74.00	-28.33
15570.000	Average	23.96	12.41	36.37	54.00	-17.63

Report No.: TMWK2308002691KR

Page 319 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

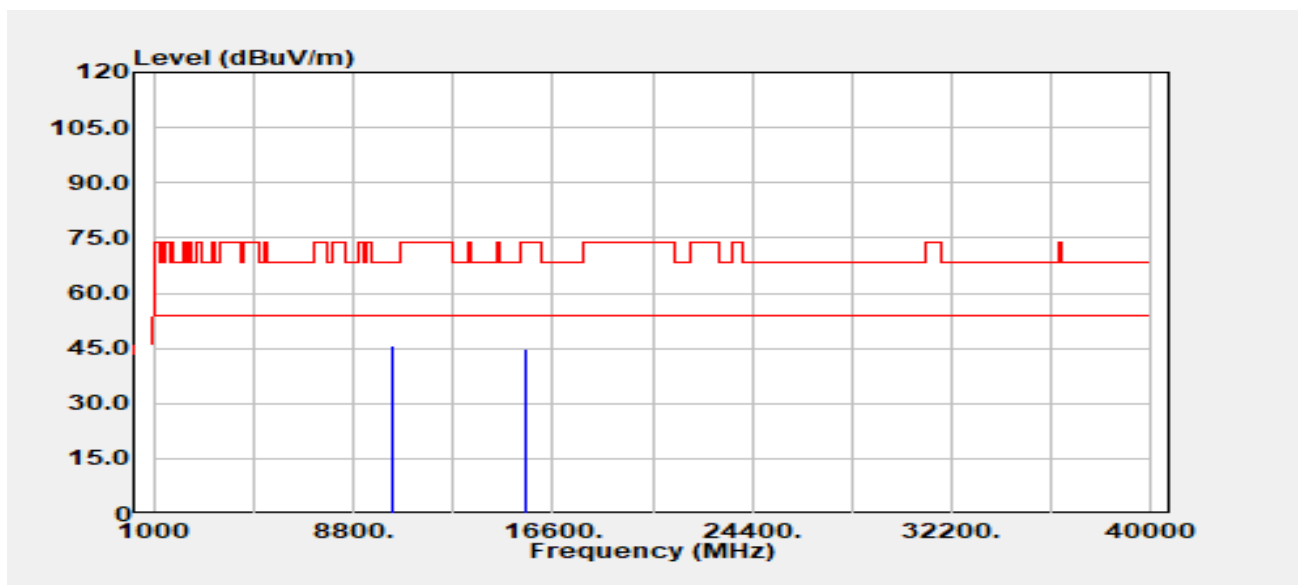


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.000	Peak	34.30	11.22	45.52	68.20	-22.68
15570.000	Peak	32.52	12.41	44.94	74.00	-29.06
15570.000	Average	23.95	12.41	36.36	54.00	-17.64

Report No.: TMWK2308002691KR

Page 320 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5230 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

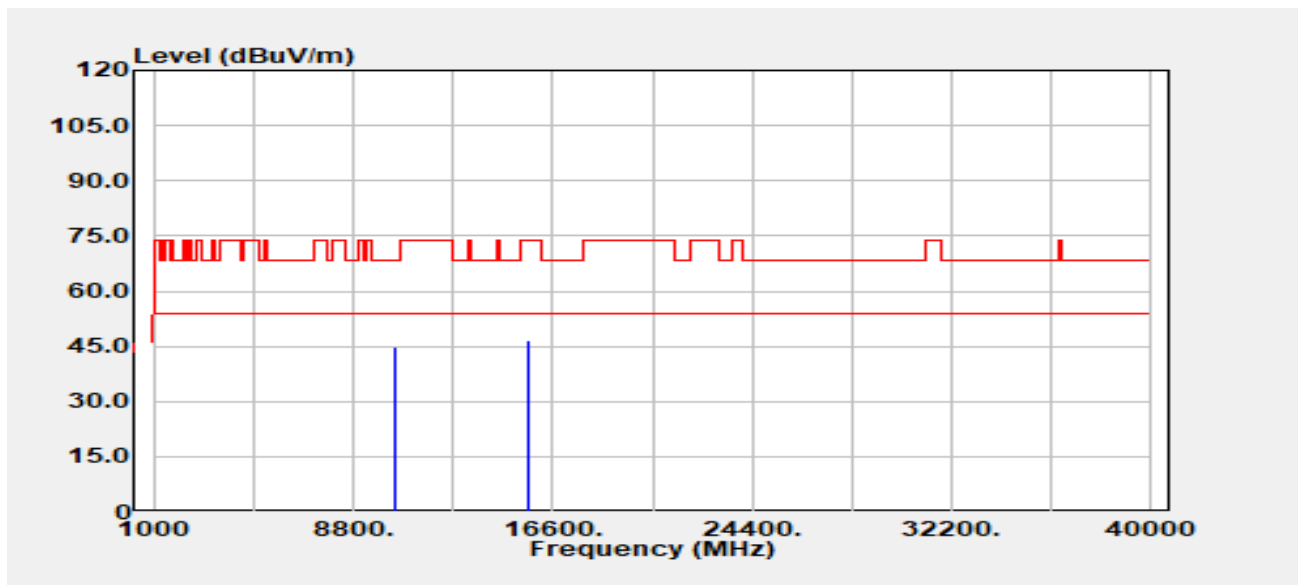


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.000	Peak	33.68	11.30	44.97	68.20	-23.23
15690.000	Peak	32.71	13.90	46.62	74.00	-27.38
15690.000	Average	23.80	13.90	37.70	54.00	-16.30

Report No.: TMWK2308002691KR

Page 321 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band1
Frequency :5230 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

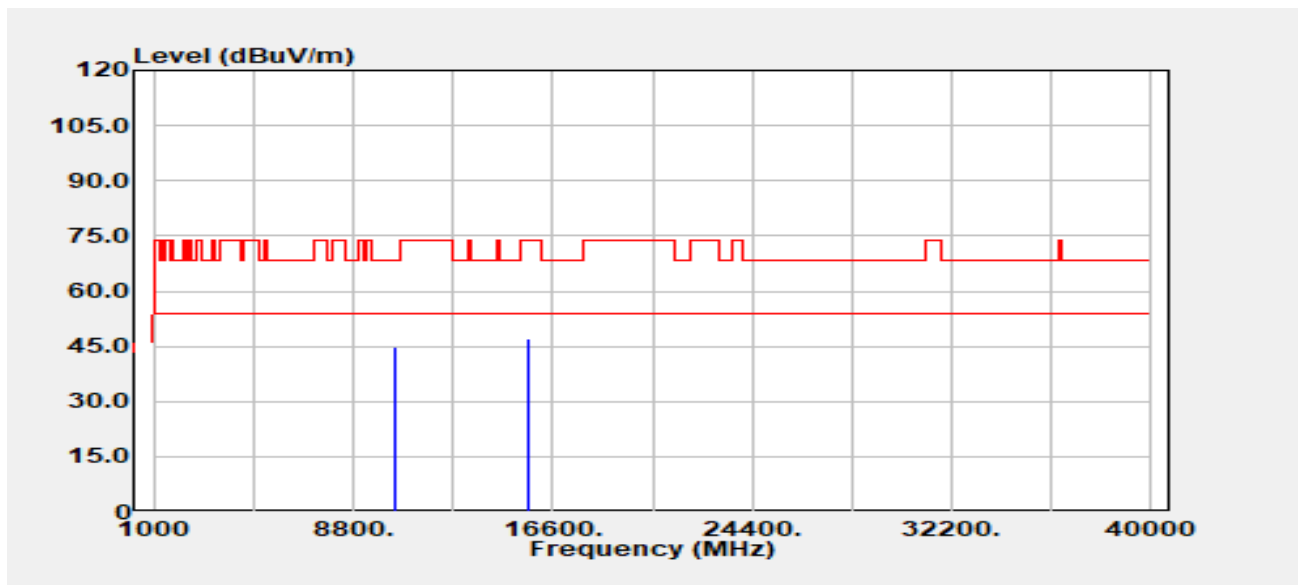


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.000	Peak	33.62	11.30	44.92	68.20	-23.28
15690.000	Peak	33.39	13.90	47.30	74.00	-26.70
15690.000	Average	23.88	13.90	37.79	54.00	-16.21

Report No.: TMWK2308002691KR

Page 322 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :E2
Setting :


Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

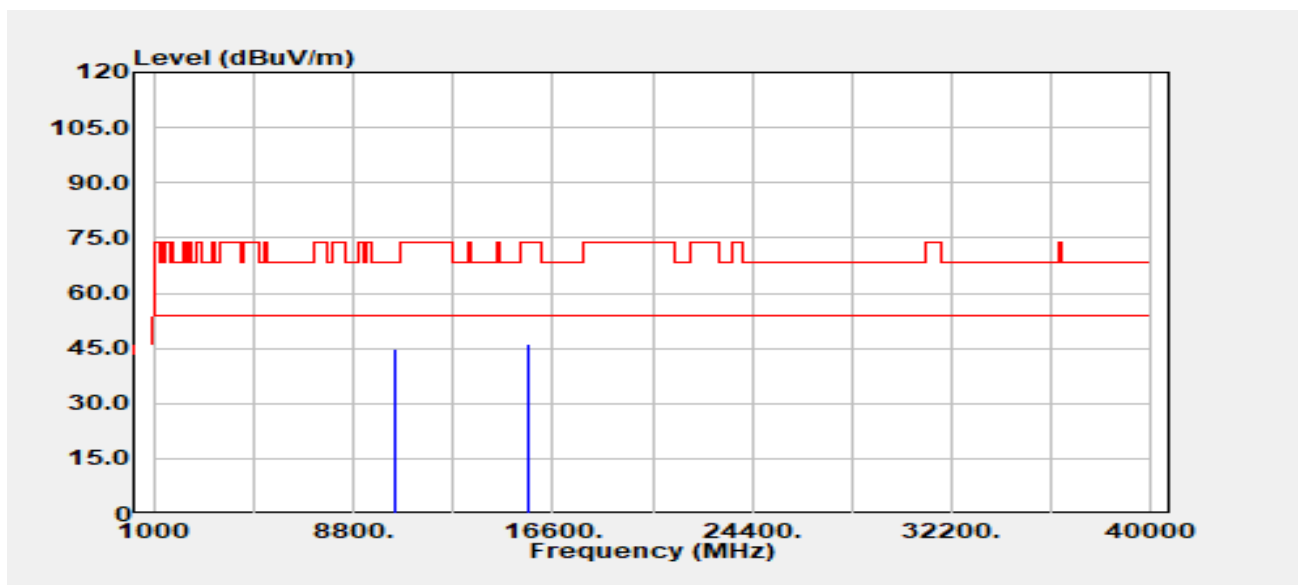

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.000	Peak	33.85	11.21	45.06	68.20	-23.14
15630.000	Peak	33.21	13.06	46.26	74.00	-27.74
15630.000	Average	24.68	13.06	37.74	54.00	-16.26

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

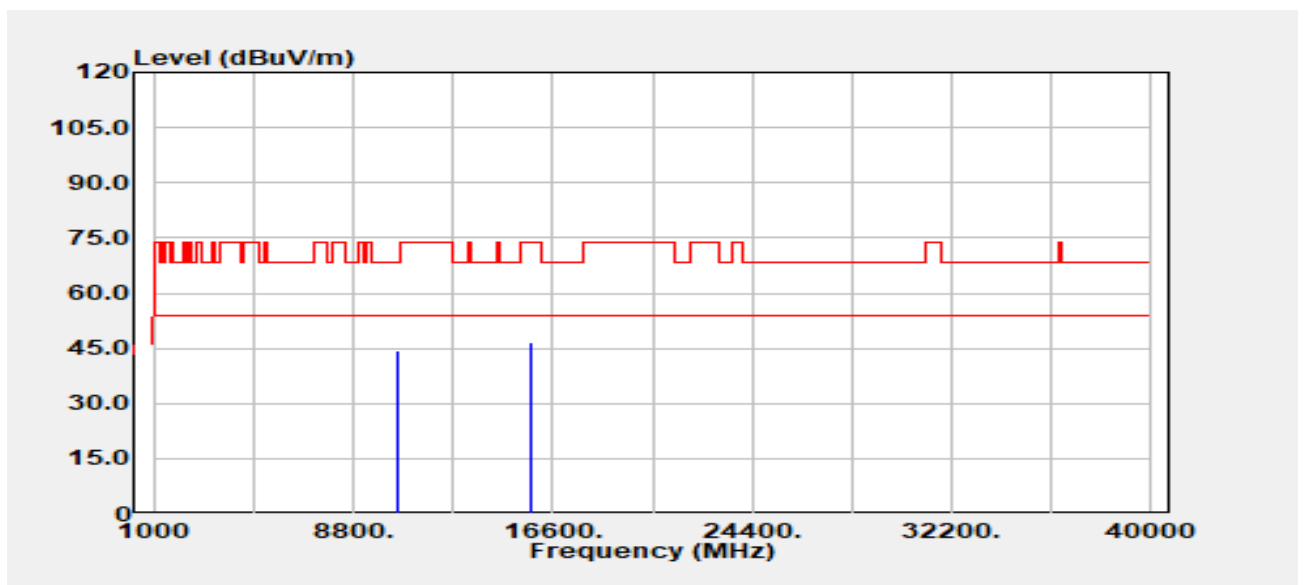


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.000	Peak	32.82	11.41	44.23	68.20	-23.97
15780.000	Peak	32.61	14.08	46.68	74.00	-27.32
15780.000	Average	23.00	14.08	37.08	54.00	-16.92

Report No.: TMWK2308002691KR

Page 324 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

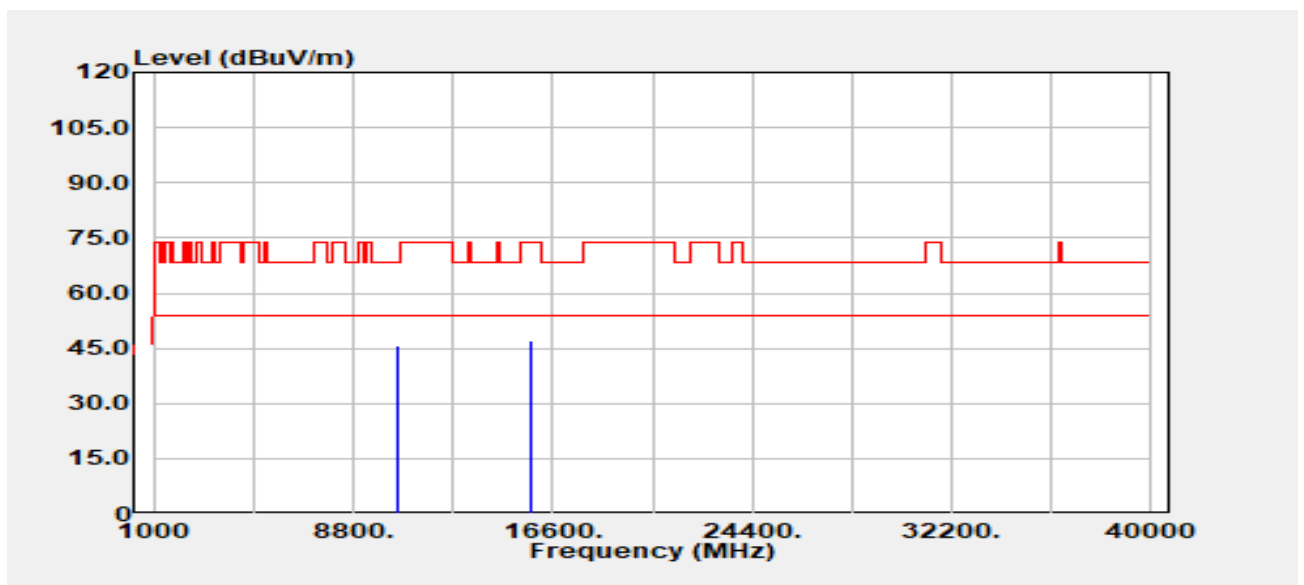


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.000	Peak	34.17	11.41	45.58	68.20	-22.62
15780.000	Peak	33.16	14.08	47.23	74.00	-26.77
15780.000	Average	22.93	14.08	37.00	54.00	-17.00

Report No.: TMWK2308002691KR

Page 325 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

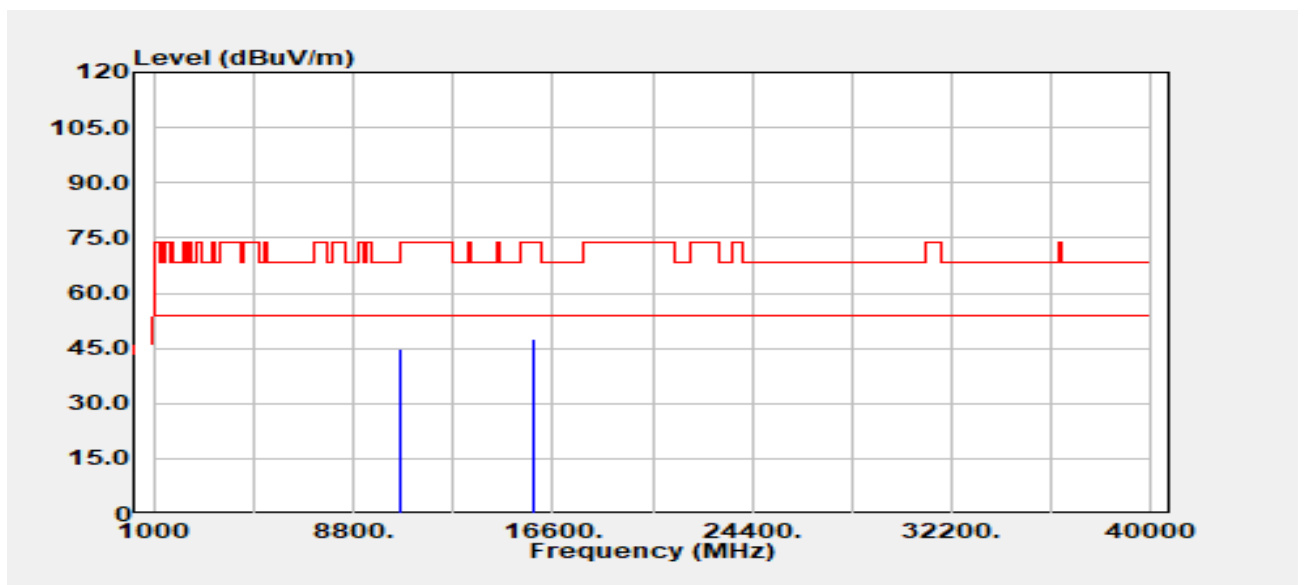


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.000	Peak	33.28	11.53	44.81	68.20	-23.39
15900.000	Peak	33.18	14.45	47.63	74.00	-26.37
15900.000	Average	23.58	14.45	38.03	54.00	-15.97

Report No.: TMWK2308002691KR

Page 326 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

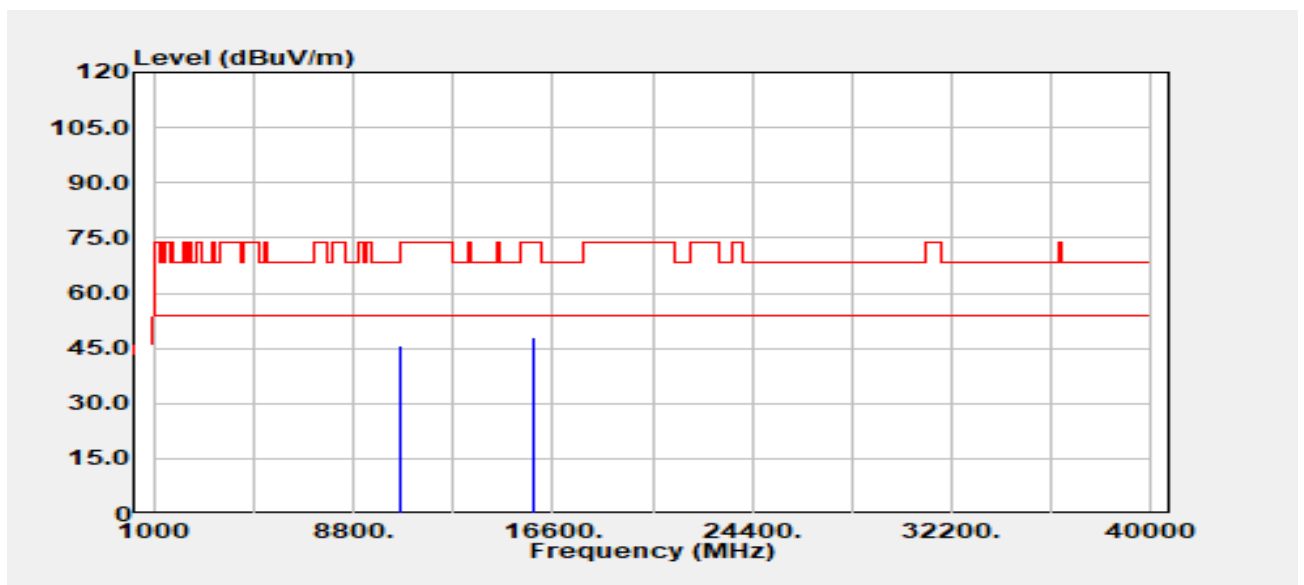


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.000	Peak	34.20	11.53	45.73	68.20	-22.47
15900.000	Peak	33.47	14.45	47.92	74.00	-26.08
15900.000	Average	23.59	14.45	38.04	54.00	-15.96

Report No.: TMWK2308002691KR

Page 327 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

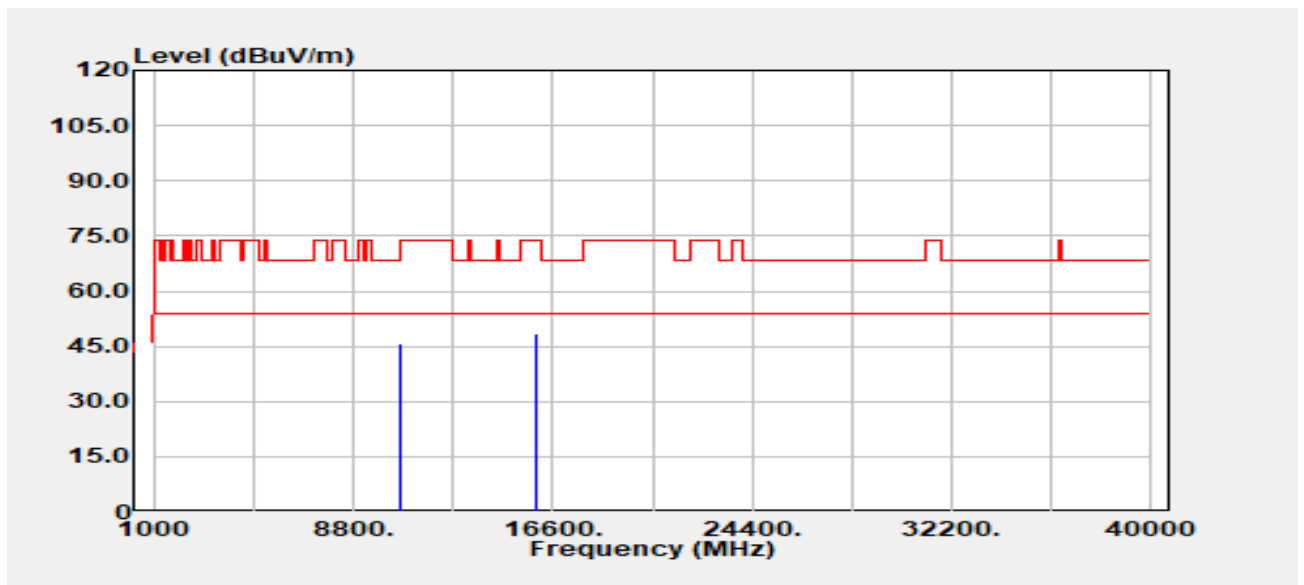


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.000	Peak	34.16	11.50	45.66	74.00	-28.34
10640.000	Average	23.93	11.50	35.44	54.00	-18.56
15960.000	Peak	33.33	15.09	48.42	74.00	-25.58
15960.000	Average	23.04	15.09	38.13	54.00	-15.87

Report No.: TMWK2308002691KR

Page 328 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

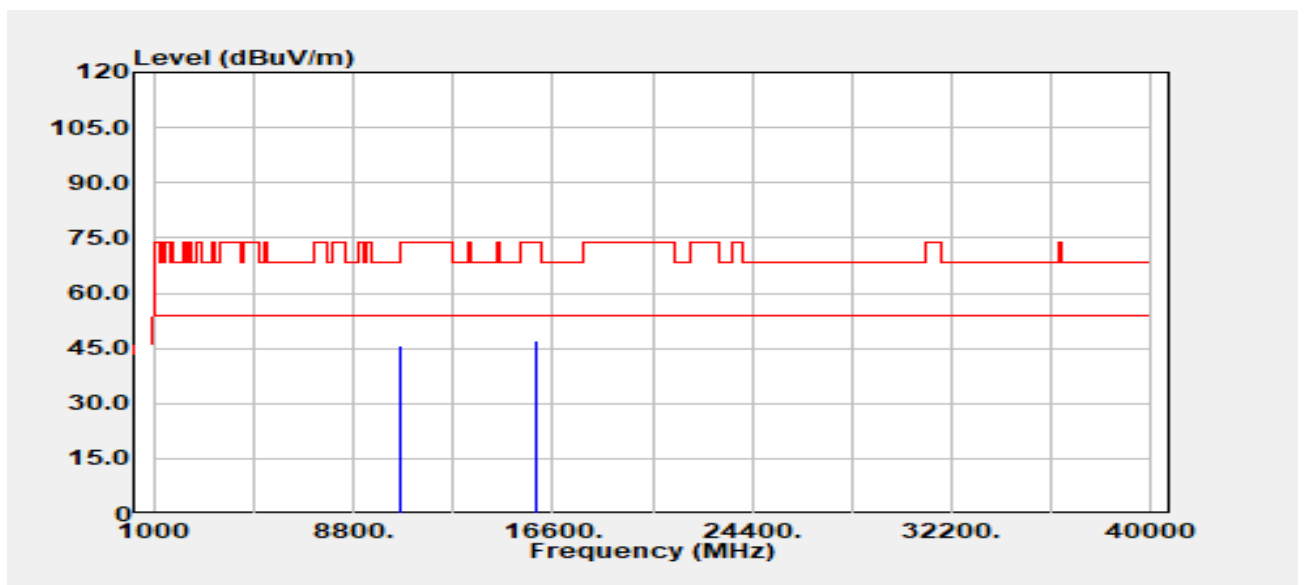


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.000	Peak	34.15	11.50	45.65	74.00	-28.35
10640.000	Average	23.90	11.50	35.41	54.00	-18.59
15960.000	Peak	32.22	15.09	47.31	74.00	-26.69
15960.000	Average	23.11	15.09	38.20	54.00	-15.80

Report No.: TMWK2308002691KR

Page 329 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

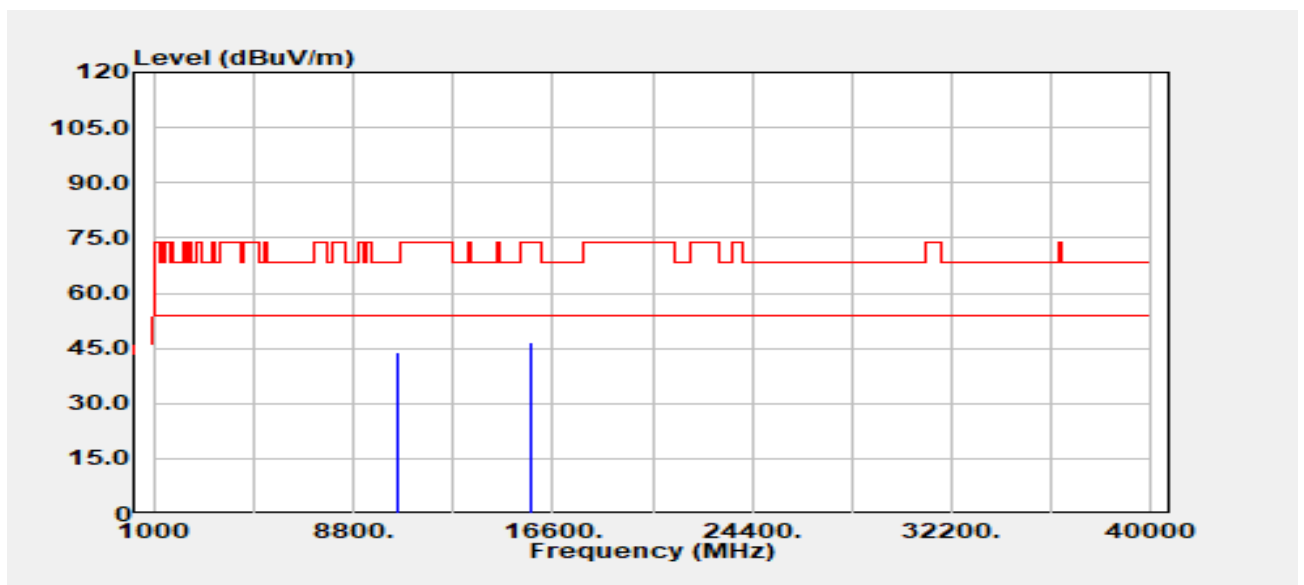


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.000	Peak	32.72	11.41	44.13	68.20	-24.07
15780.000	Peak	32.63	14.08	46.70	74.00	-27.30
15780.000	Average	22.72	14.08	36.79	54.00	-17.21

Report No.: TMWK2308002691KR

Page 330 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

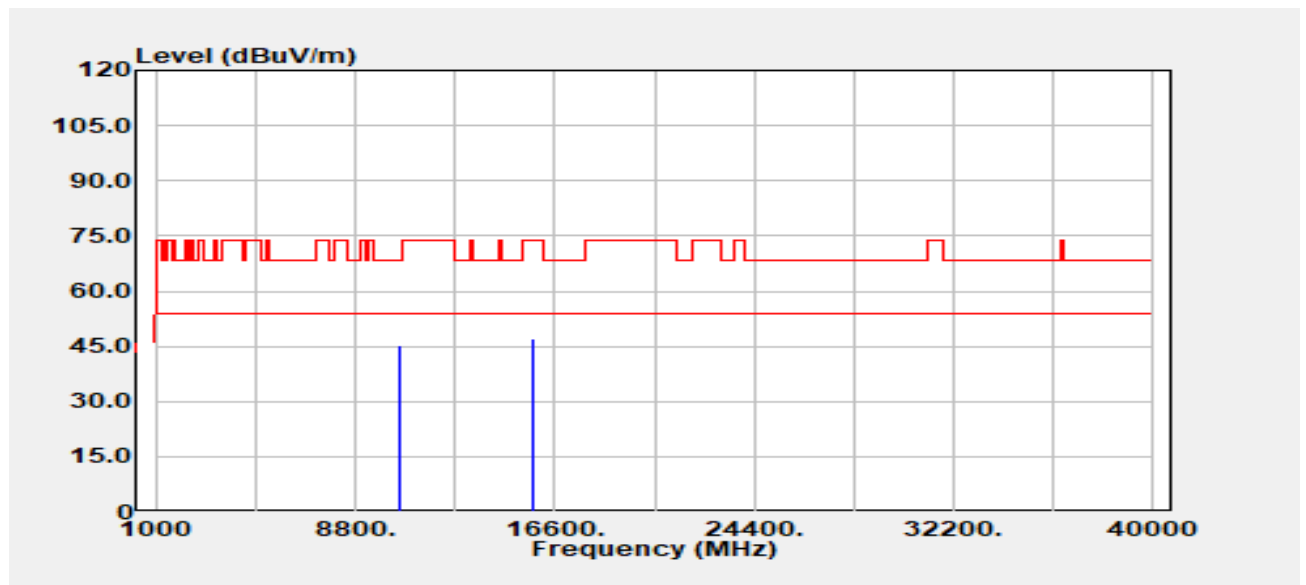


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.000	Peak	33.89	11.41	45.30	68.20	-22.90
15780.000	Peak	33.20	14.08	47.28	74.00	-26.72
15780.000	Average	22.71	14.08	36.78	54.00	-17.22

Report No.: TMWK2308002691KR

Page 331 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

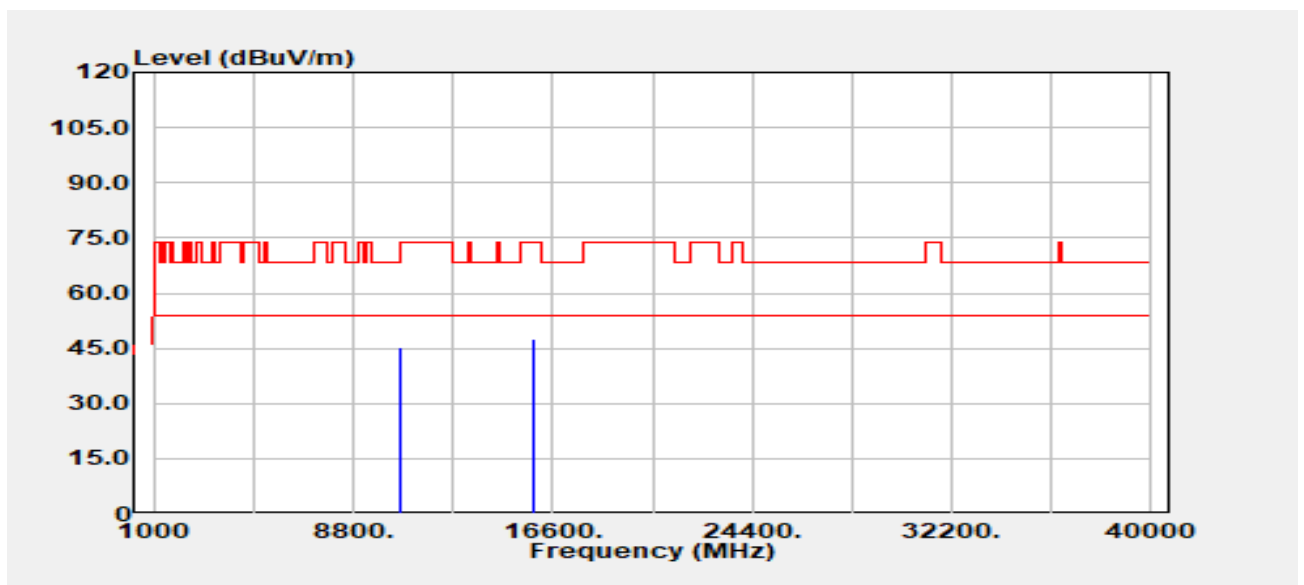


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.000	Peak	33.69	11.53	45.22	68.20	-22.98
15900.000	Peak	33.11	14.45	47.56	74.00	-26.44
15900.000	Average	23.43	14.45	37.88	54.00	-16.12

Report No.: TMWK2308002691KR

Page 332 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

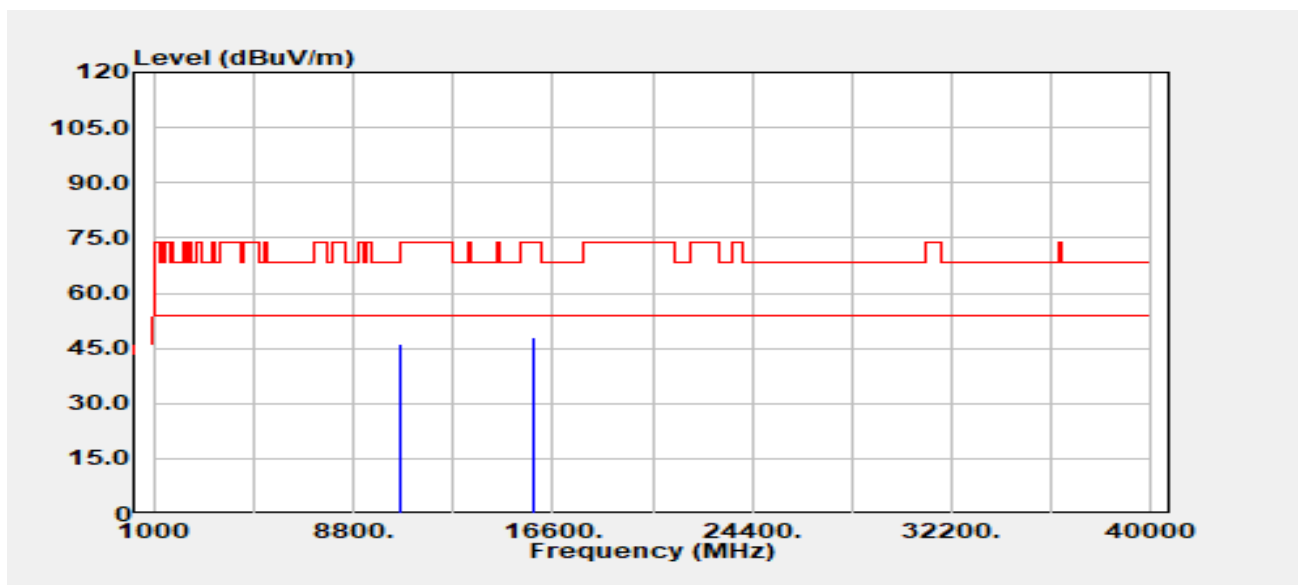


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.000	Peak	34.65	11.53	46.18	68.20	-22.02
15900.000	Peak	33.49	14.45	47.94	74.00	-26.06
15900.000	Average	23.47	14.45	37.92	54.00	-16.08

Report No.: TMWK2308002691KR

Page 333 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

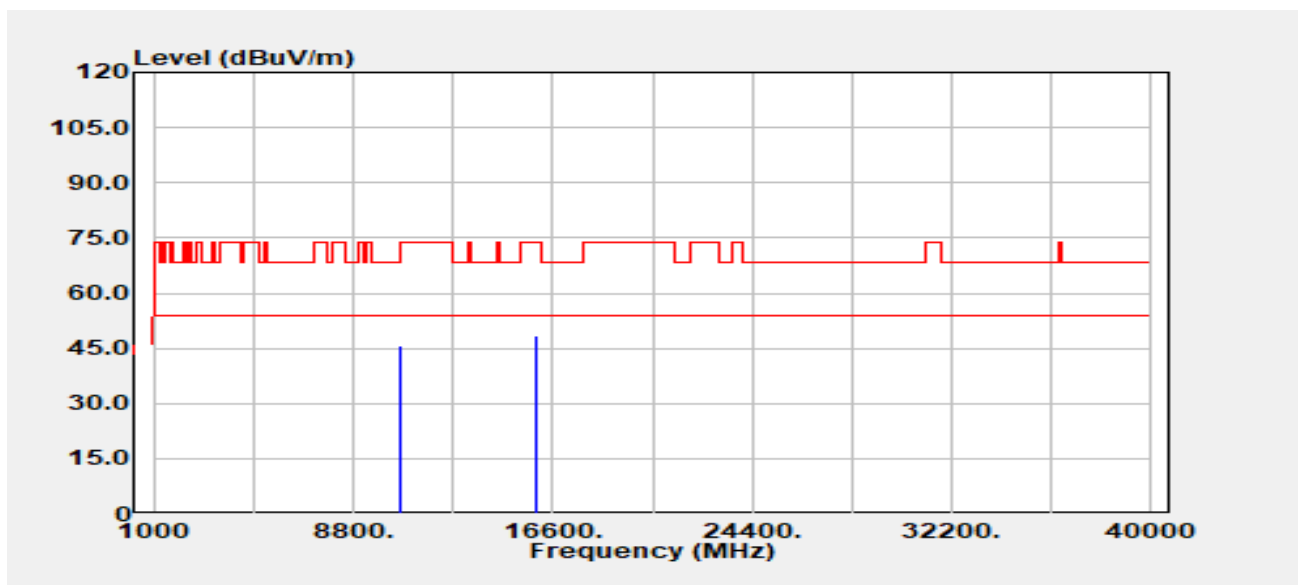


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.000	Peak	34.24	11.50	45.74	74.00	-28.26
10640.000	Average	23.90	11.50	35.40	54.00	-18.60
15960.000	Peak	33.57	15.09	48.66	74.00	-25.34
15960.000	Average	23.10	15.09	38.19	54.00	-15.81

Report No.: TMWK2308002691KR

Page 334 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

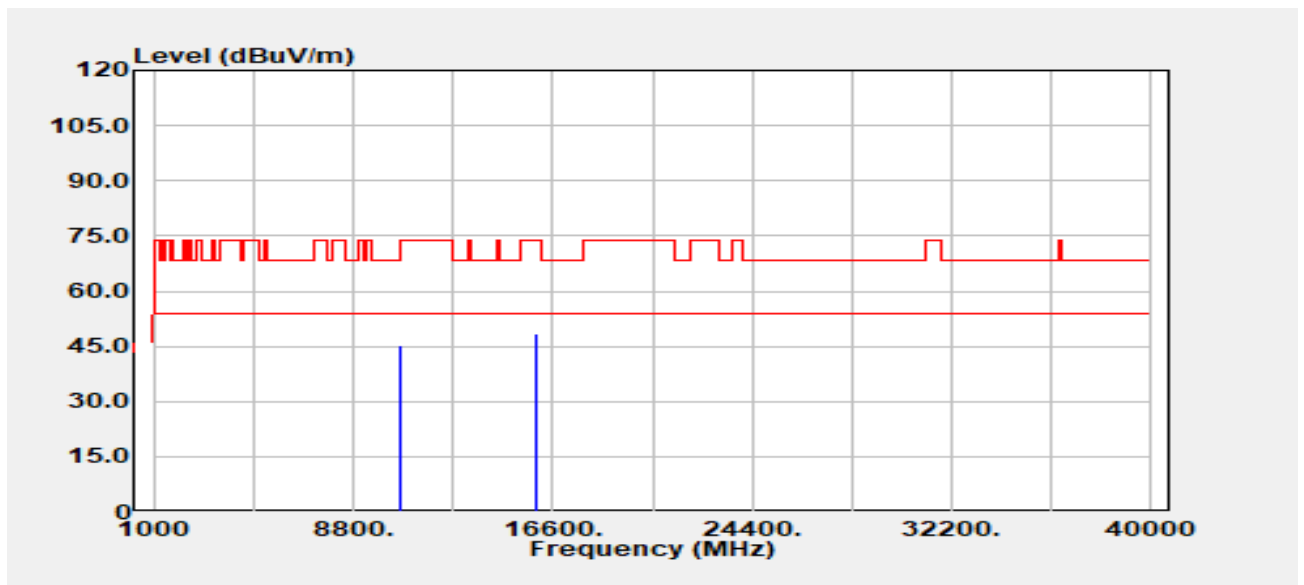


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.000	Peak	33.81	11.50	45.31	74.00	-28.69
10640.000	Average	23.88	11.50	35.38	54.00	-18.62
15960.000	Peak	33.27	15.09	48.36	74.00	-25.64
15960.000	Average	23.07	15.09	38.16	54.00	-15.84

Report No.: TMWK2308002691KR

Page 335 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5270 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

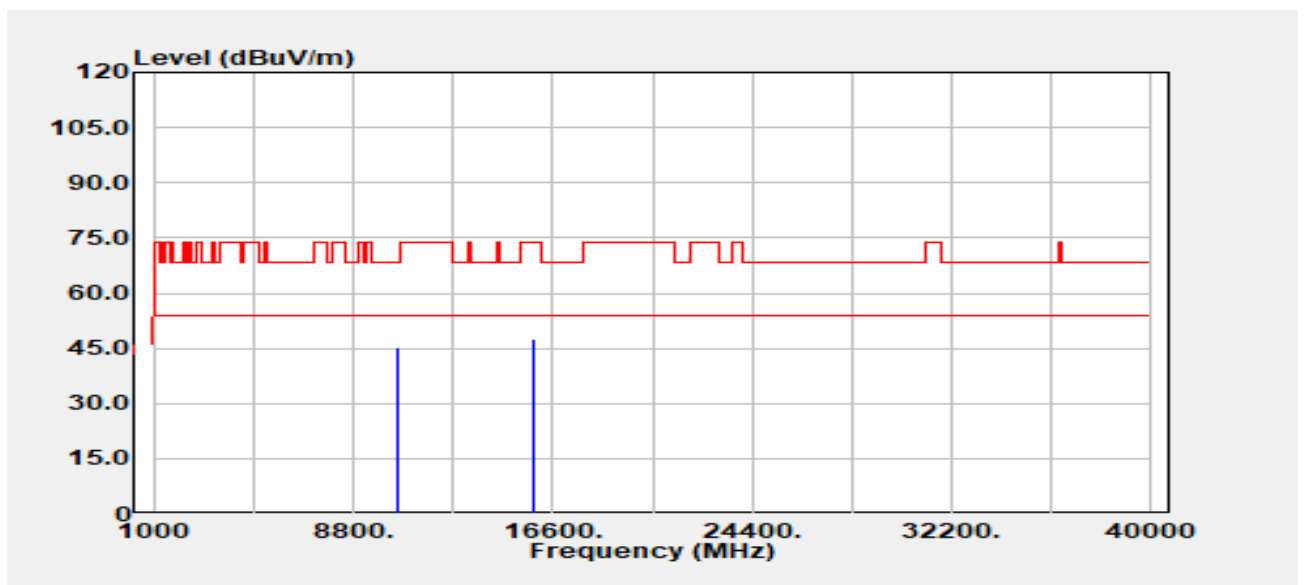


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.000	Peak	33.78	11.41	45.19	68.20	-23.01
15810.000	Peak	33.33	14.04	47.37	74.00	-26.63
15810.000	Average	24.60	14.04	38.64	54.00	-15.36

Report No.: TMWK2308002691KR

Page 336 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5270 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

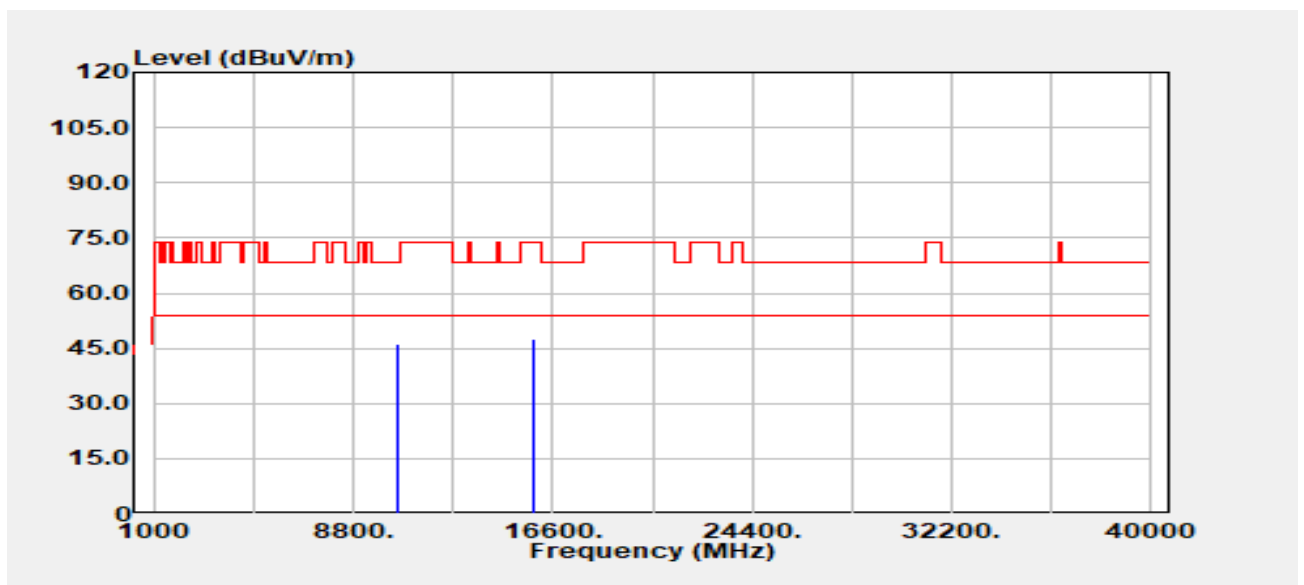


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.000	Peak	34.79	11.41	46.20	68.20	-22.00
15810.000	Peak	33.58	14.04	47.62	74.00	-26.38
15810.000	Average	24.50	14.04	38.54	54.00	-15.46

Report No.: TMWK2308002691KR

Page 337 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5310 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

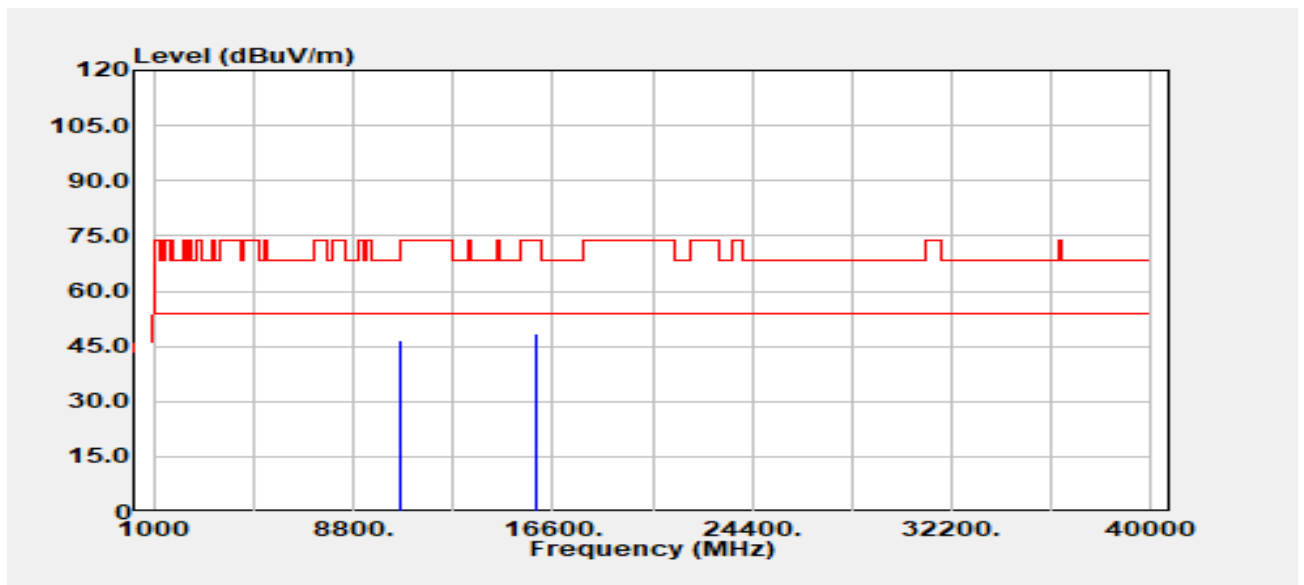


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.000	Peak	34.93	11.52	46.45	74.00	-27.55
10620.000	Average	25.39	11.52	36.91	54.00	-17.09
15930.000	Peak	33.73	14.81	48.54	74.00	-25.46
15930.000	Average	24.87	14.81	39.68	54.00	-14.32

Report No.: TMWK2308002691KR

Page 338 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band2
Frequency :5310 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

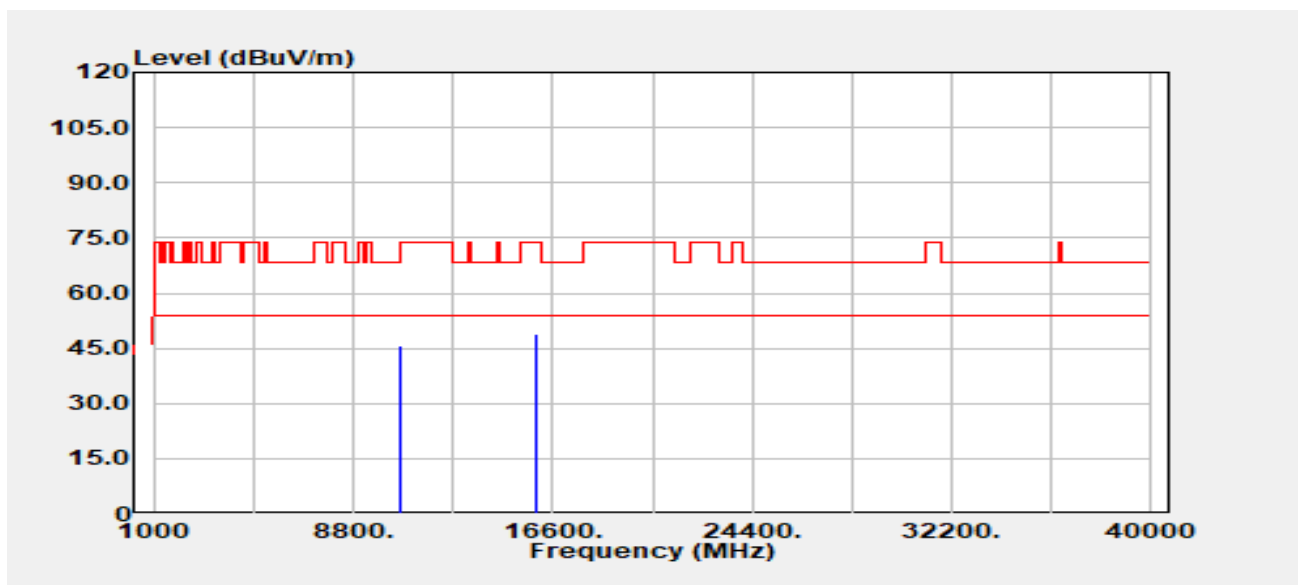


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10620.000	Peak	34.38	11.52	45.90	74.00	-28.10
10620.000	Average	25.48	11.52	37.00	54.00	-17.00
15930.000	Peak	34.12	14.81	48.94	74.00	-25.06
15930.000	Average	24.38	14.81	39.19	54.00	-14.81

Report No.: TMWK2308002691KR

Page 339 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

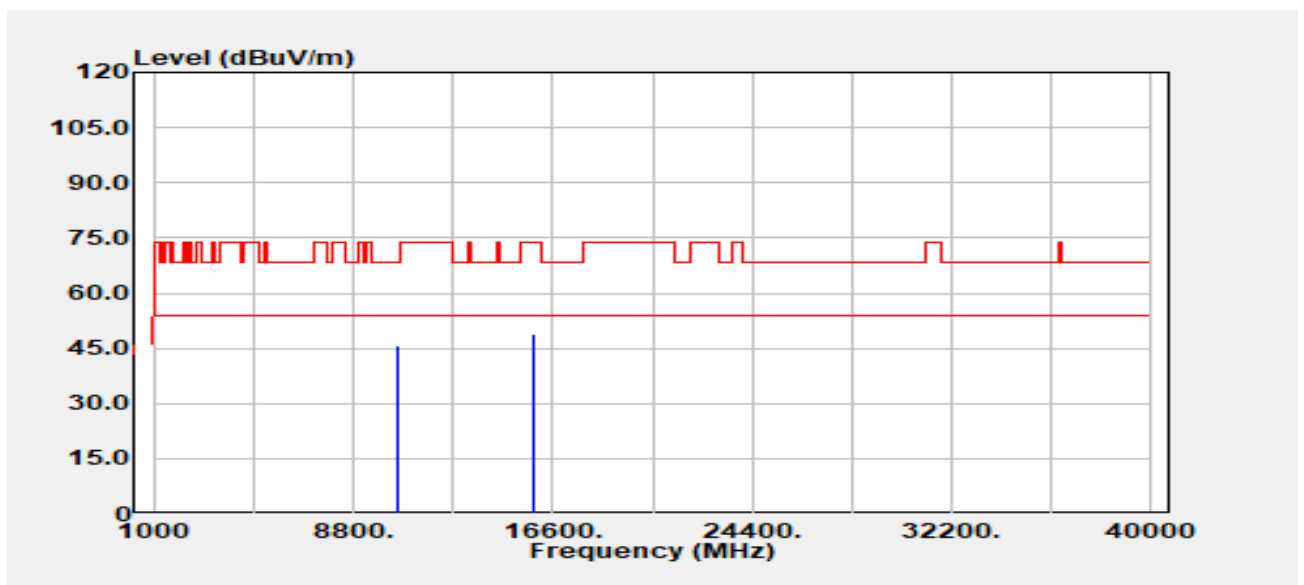


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.000	Peak	34.12	11.48	45.60	68.20	-22.60
15870.000	Peak	34.39	14.34	48.73	74.00	-25.27
15870.000	Average	24.62	14.34	38.96	54.00	-15.04

Report No.: TMWK2308002691KR

Page 340 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

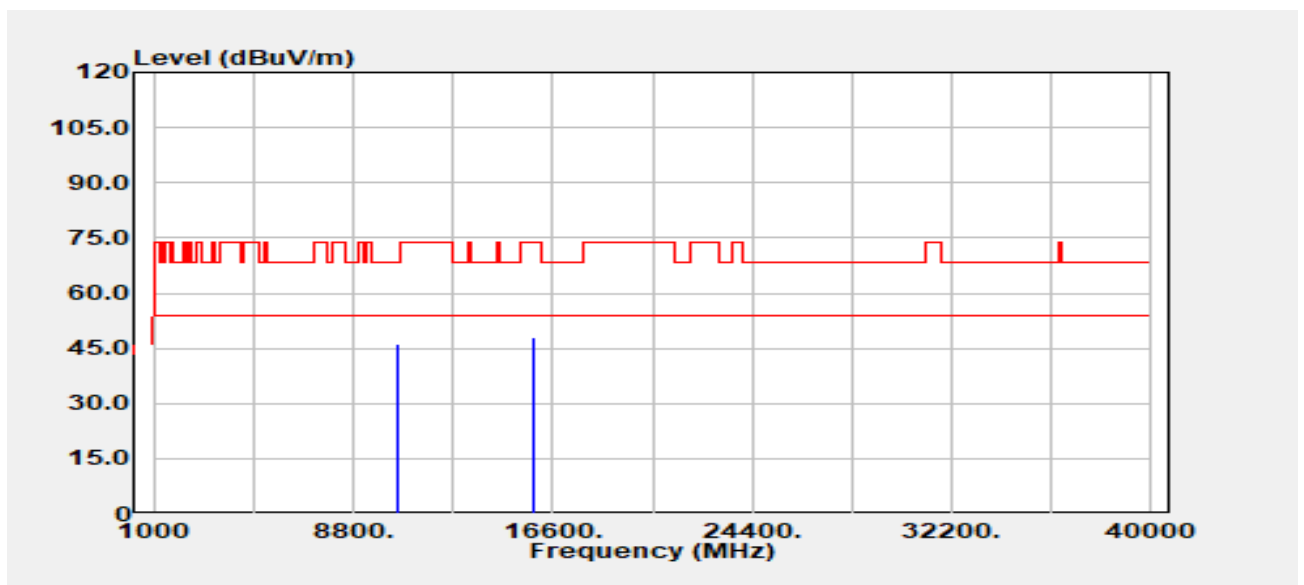


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.000	Peak	34.85	11.48	46.33	68.20	-21.87
15870.000	Peak	33.48	14.34	47.82	74.00	-26.18
15870.000	Average	24.64	14.34	38.98	54.00	-15.02

Report No.: TMWK2308002691KR

Page 341 / 391
Rev.: 00

Project Number	:TM-2308000057P	Test Date	:2023-09-01
Operation Band	:802.11ac80/Band2_BT EDR	Temp./Humi.	:24.6/58
Frequency	:5290 MHz_2480 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray.Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

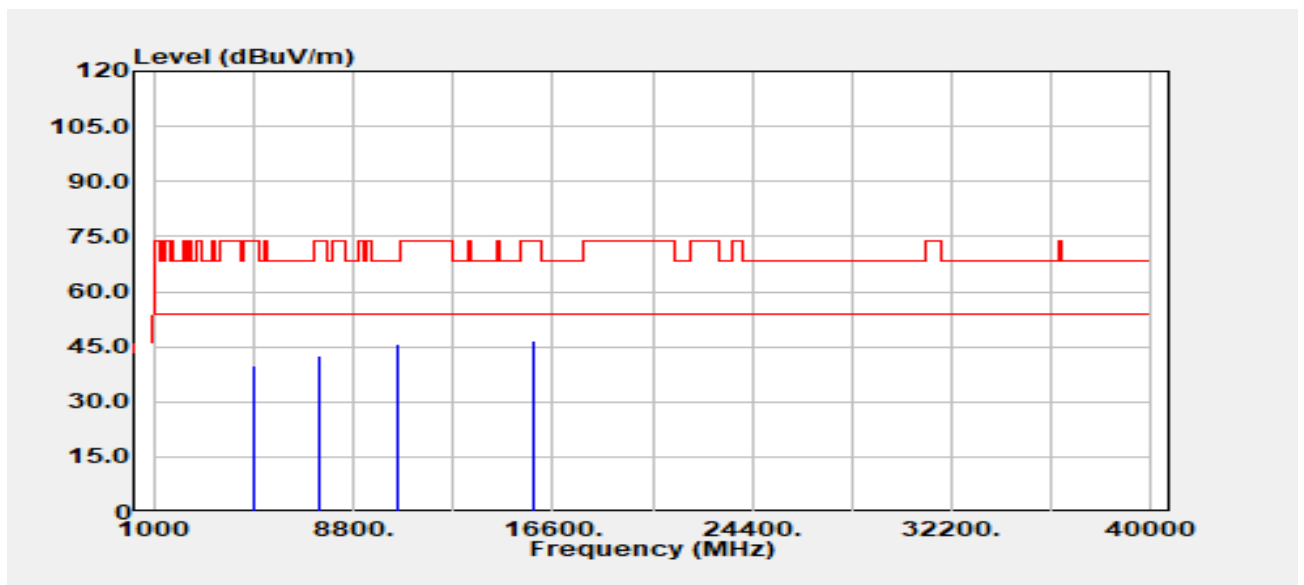


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4960.000	Peak	37.78	2.25	40.03	74.00	-33.97
4960.000	Average	27.97	2.25	30.22	54.00	-23.78
7440.000	Peak	34.94	7.64	42.57	74.00	-31.43
7440.000	Average	24.70	7.64	32.34	54.00	-21.66
10580.000	Peak	34.09	11.48	45.57	68.20	-22.63
15870.000	Peak	32.20	14.34	46.55	74.00	-27.45
15870.000	Average	23.37	14.34	37.71	54.00	-16.29

Report No.: TMWK2308002691KR

Page 342 / 391
Rev.: 00

Project Number	:TM-2308000057P	Test Date	:2023-09-01
Operation Band	:802.11ac80/Band2_BT EDR	Temp./Humi.	:24.6/58
Frequency	:5290 MHz_2480 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray.Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

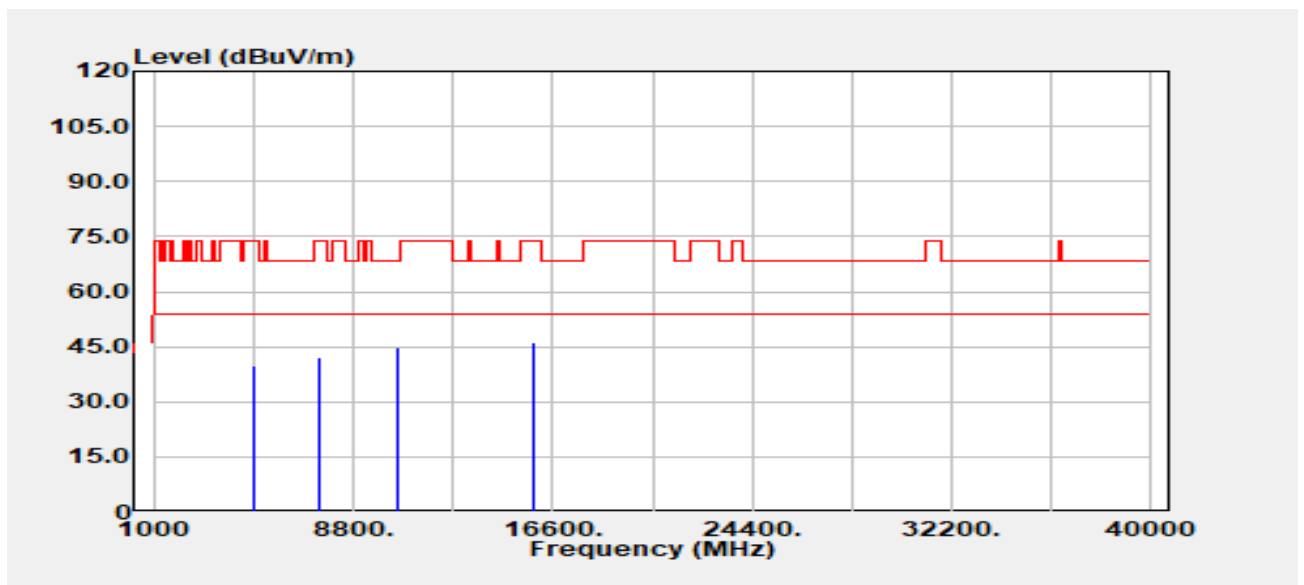


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4960.000	Peak	37.64	2.25	39.89	74.00	-34.11
4960.000	Average	28.20	2.25	30.44	54.00	-23.56
7440.000	Peak	34.50	7.64	42.13	74.00	-31.87
7440.000	Average	24.68	7.64	32.32	54.00	-21.68
10580.000	Peak	33.36	11.48	44.84	68.20	-23.36
15870.000	Peak	32.06	14.34	46.40	74.00	-27.60
15870.000	Average	23.11	14.34	37.45	54.00	-16.55

Report No.: TMWK2308002691KR

Page 343 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

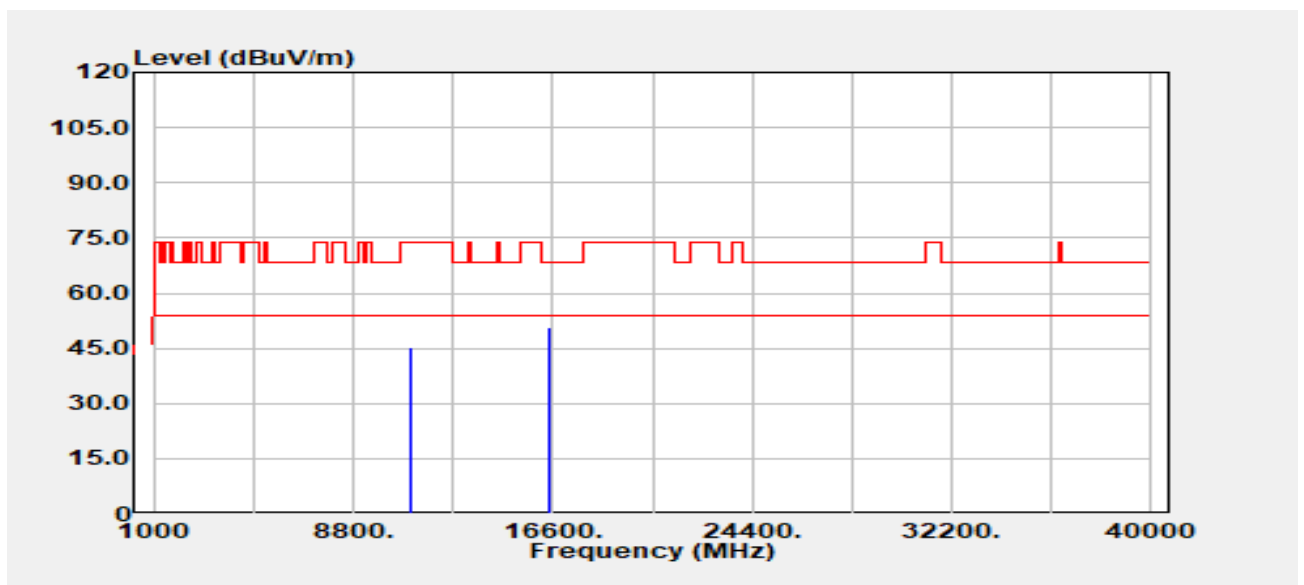


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.000	Peak	32.64	12.42	45.06	74.00	-28.94
11000.000	Average	23.61	12.42	36.03	54.00	-17.97
16500.000	Peak	31.80	18.70	50.50	68.20	-17.70

Report No.: TMWK2308002691KR

Page 344 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

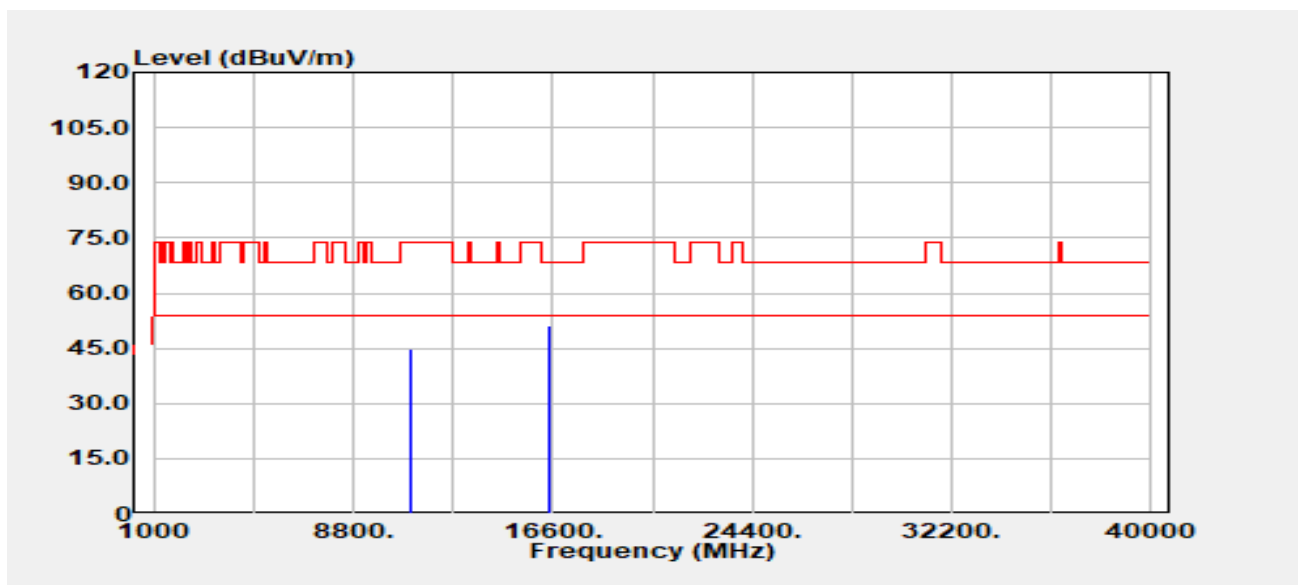


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.000	Peak	32.38	12.42	44.80	74.00	-29.20
11000.000	Average	23.51	12.42	35.93	54.00	-18.07
16500.000	Peak	32.50	18.70	51.20	68.20	-17.00

Report No.: TMWK2308002691KR

Page 345 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

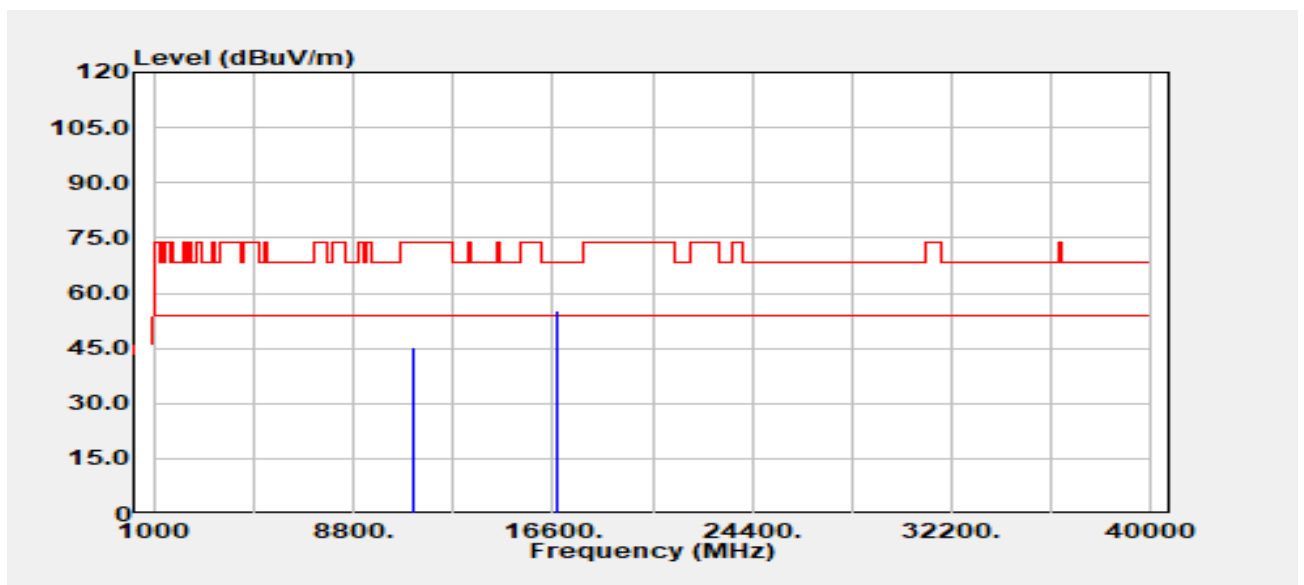


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.000	Peak	32.93	12.48	45.41	74.00	-28.59
11160.000	Average	23.76	12.48	36.24	54.00	-17.76
16740.000	Peak	34.24	20.88	55.12	68.20	-13.08

Report No.: TMWK2308002691KR

Page 346 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

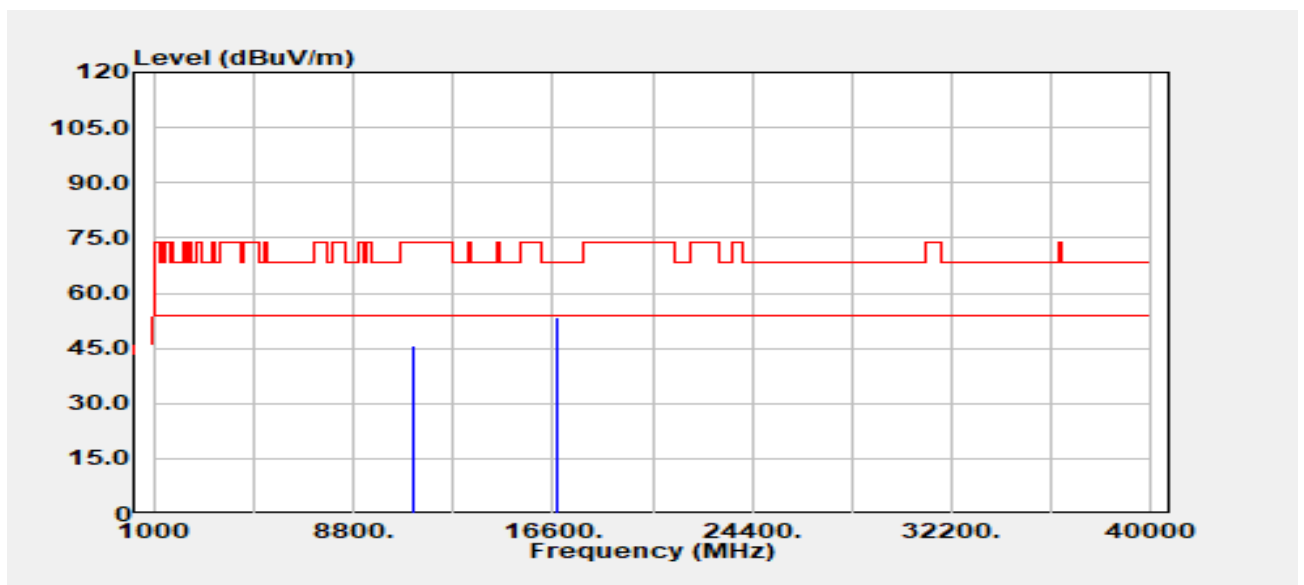


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.000	Peak	33.07	12.48	45.54	74.00	-28.46
11160.000	Average	23.62	12.48	36.10	54.00	-17.90
16740.000	Peak	32.74	20.88	53.62	68.20	-14.58

Report No.: TMWK2308002691KR

Page 347 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

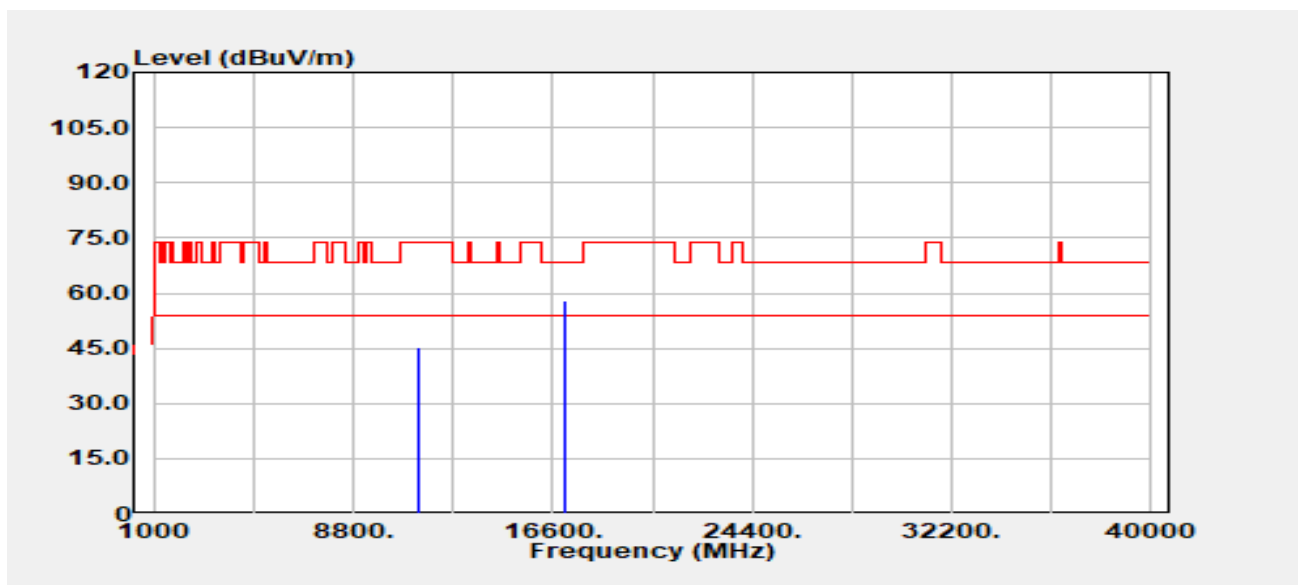


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.000	Peak	32.77	12.39	45.16	74.00	-28.84
11400.000	Average	23.52	12.39	35.91	54.00	-18.09
17100.000	Peak	32.29	25.62	57.91	68.20	-10.29

Report No.: TMWK2308002691KR

Page 348 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

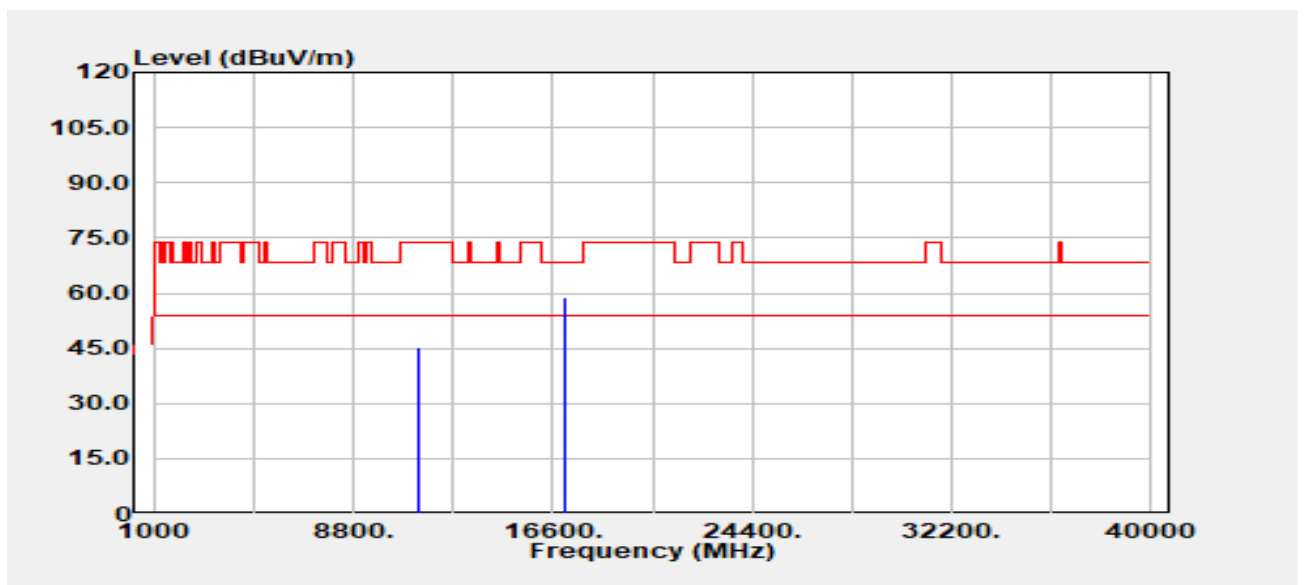


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.000	Peak	32.99	12.39	45.38	74.00	-28.62
11400.000	Average	23.41	12.39	35.80	54.00	-18.20
17100.000	Peak	33.16	25.62	58.78	68.20	-9.42

Report No.: TMWK2308002691KR

Page 349 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

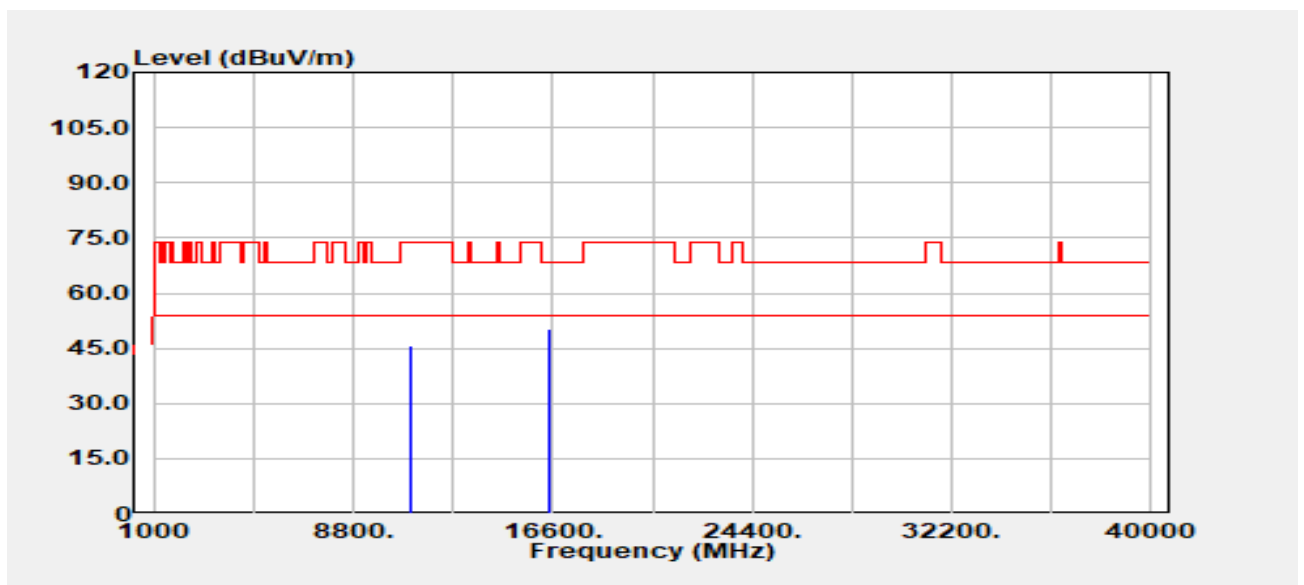


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.000	Peak	33.41	12.42	45.83	74.00	-28.17
11000.000	Average	23.47	12.42	35.89	54.00	-18.11
16500.000	Peak	31.66	18.70	50.36	68.20	-17.84

Report No.: TMWK2308002691KR

Page 350 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

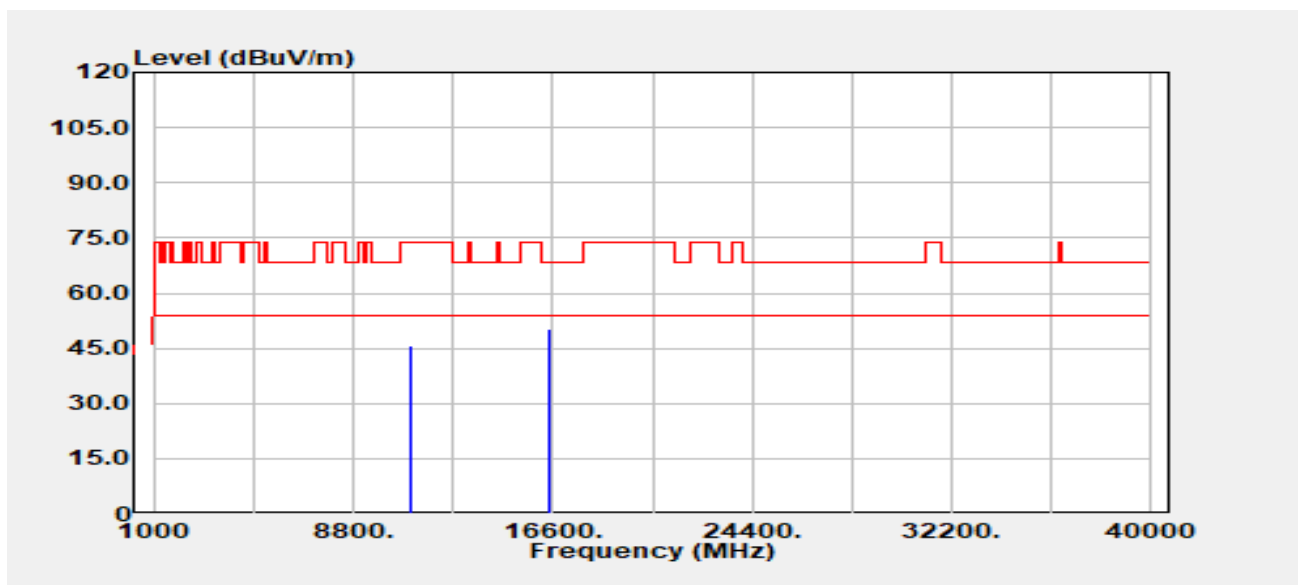


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.000	Peak	33.33	12.42	45.75	74.00	-28.25
11000.000	Average	23.43	12.42	35.85	54.00	-18.15
16500.000	Peak	31.51	18.70	50.21	68.20	-17.99

Report No.: TMWK2308002691KR

Page 351 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

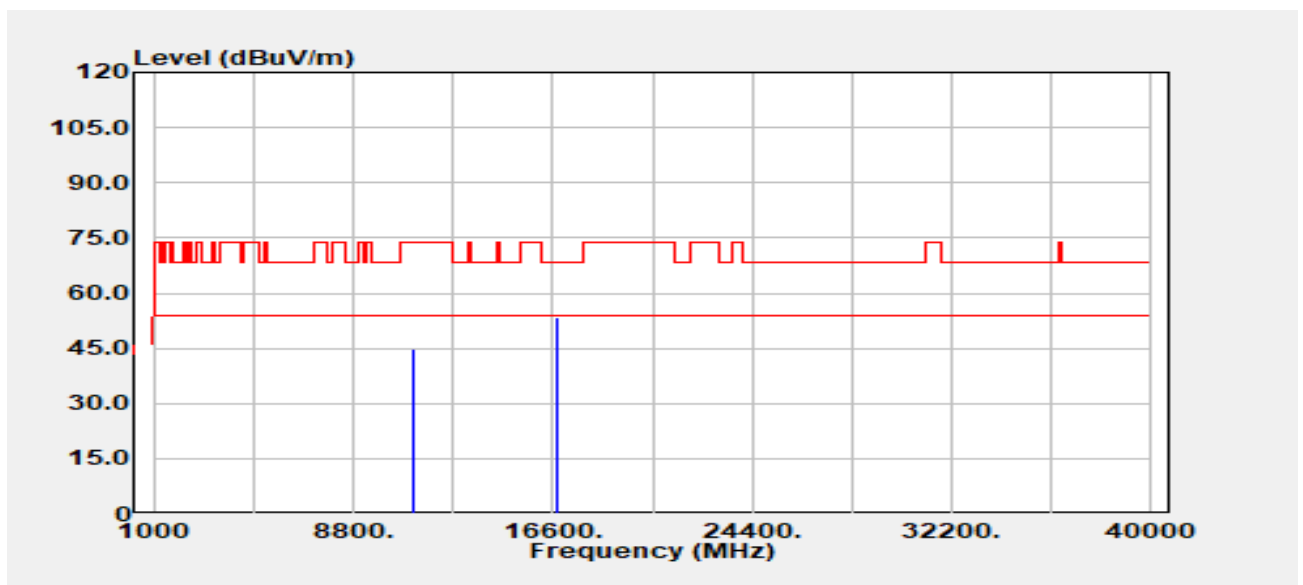


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.000	Peak	32.54	12.48	45.02	74.00	-28.98
11160.000	Average	23.76	12.48	36.24	54.00	-17.76
16740.000	Peak	32.61	20.88	53.49	68.20	-14.71

Report No.: TMWK2308002691KR

Page 352 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

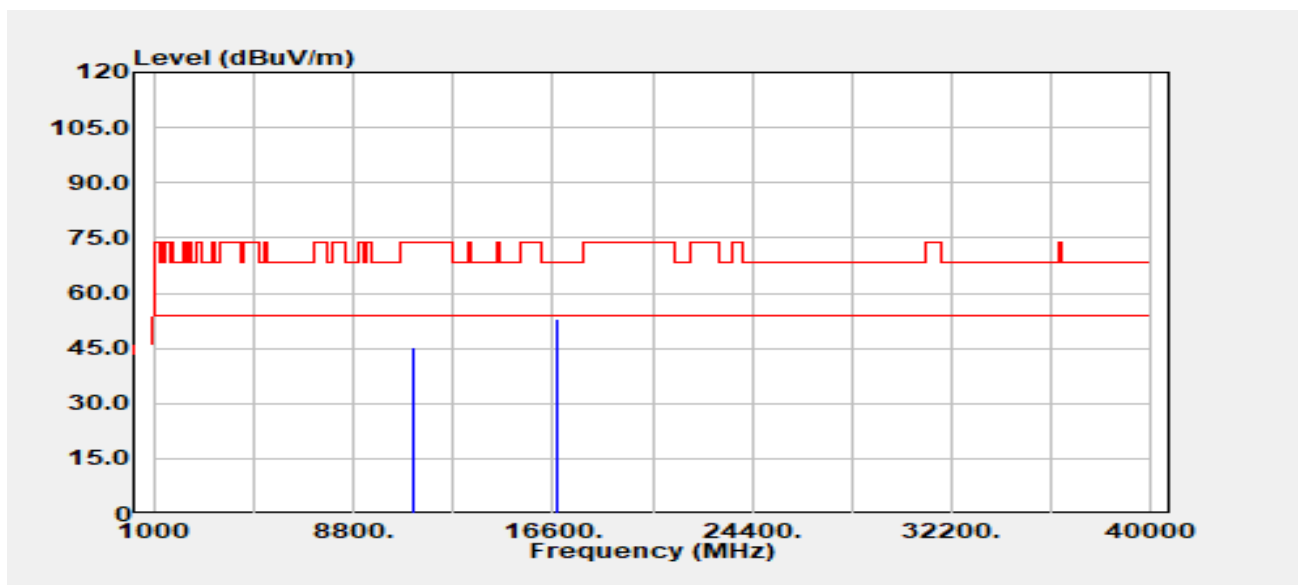


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.000	Peak	32.91	12.48	45.39	74.00	-28.61
11160.000	Average	23.46	12.48	35.93	54.00	-18.07
16740.000	Peak	31.92	20.88	52.80	68.20	-15.40

Report No.: TMWK2308002691KR

Page 353 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

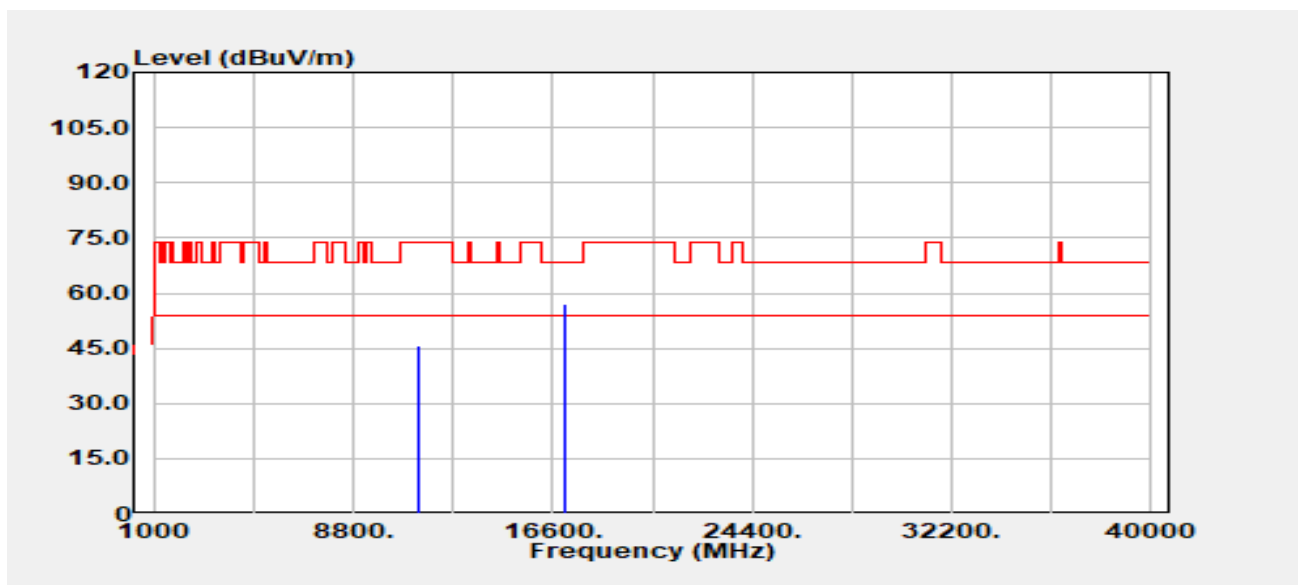


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.000	Peak	33.30	12.39	45.69	74.00	-28.31
11400.000	Average	23.34	12.39	35.73	54.00	-18.27
17100.000	Peak	31.30	25.62	56.92	68.20	-11.28

Report No.: TMWK2308002691KR

Page 354 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

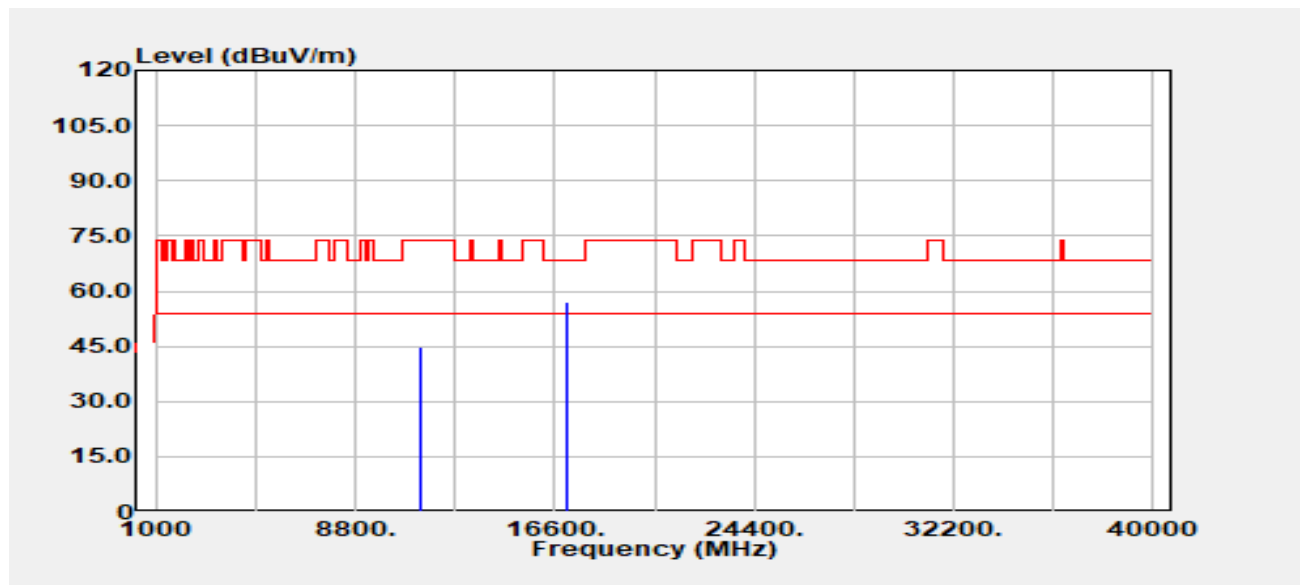


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.000	Peak	32.62	12.39	45.01	74.00	-28.99
11400.000	Average	23.49	12.39	35.88	54.00	-18.12
17100.000	Peak	31.27	25.62	56.89	68.20	-11.31

Report No.: TMWK2308002691KR

Page 355 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

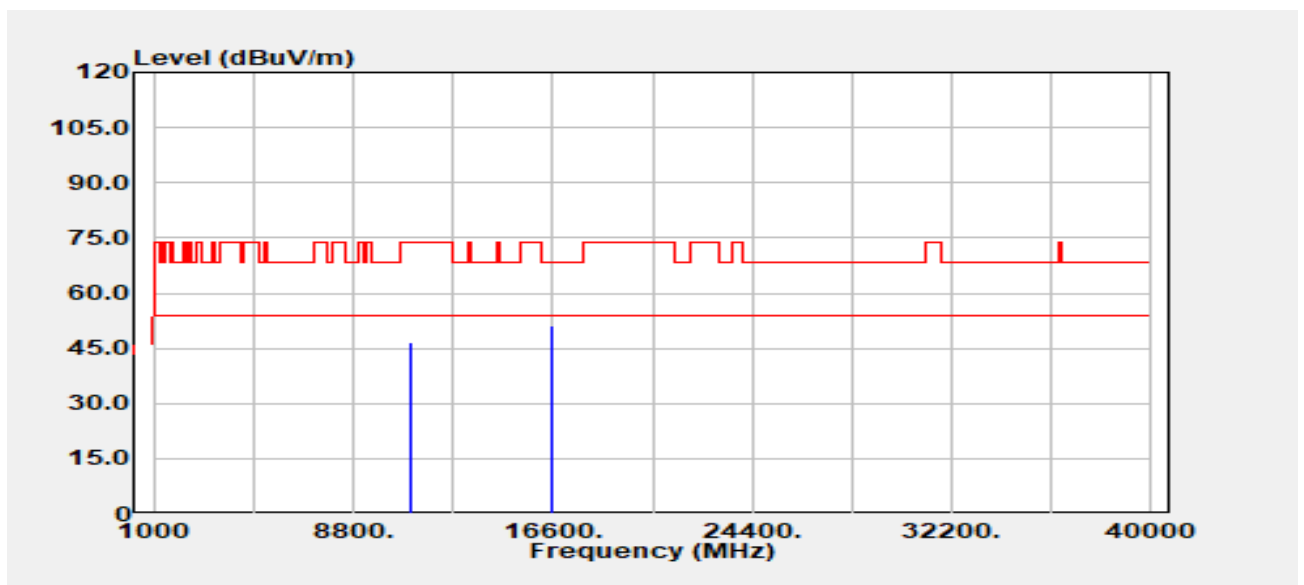


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.000	Peak	34.07	12.39	46.46	74.00	-27.54
11020.000	Average	25.01	12.39	37.40	54.00	-16.60
16530.000	Peak	32.62	18.66	51.28	68.20	-16.92

Report No.: TMWK2308002691KR

Page 356 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

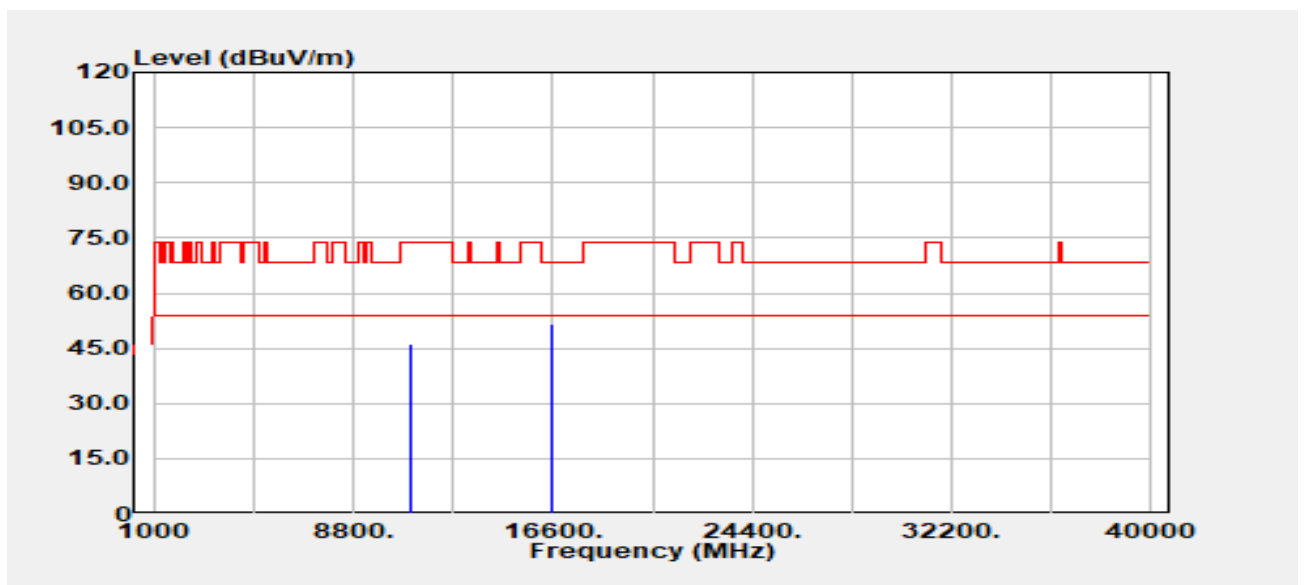


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.000	Peak	33.92	12.39	46.31	74.00	-27.69
11020.000	Average	24.94	12.39	37.33	54.00	-16.67
16530.000	Peak	32.89	18.66	51.55	68.20	-16.65

Report No.: TMWK2308002691KR

Page 357 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5550 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

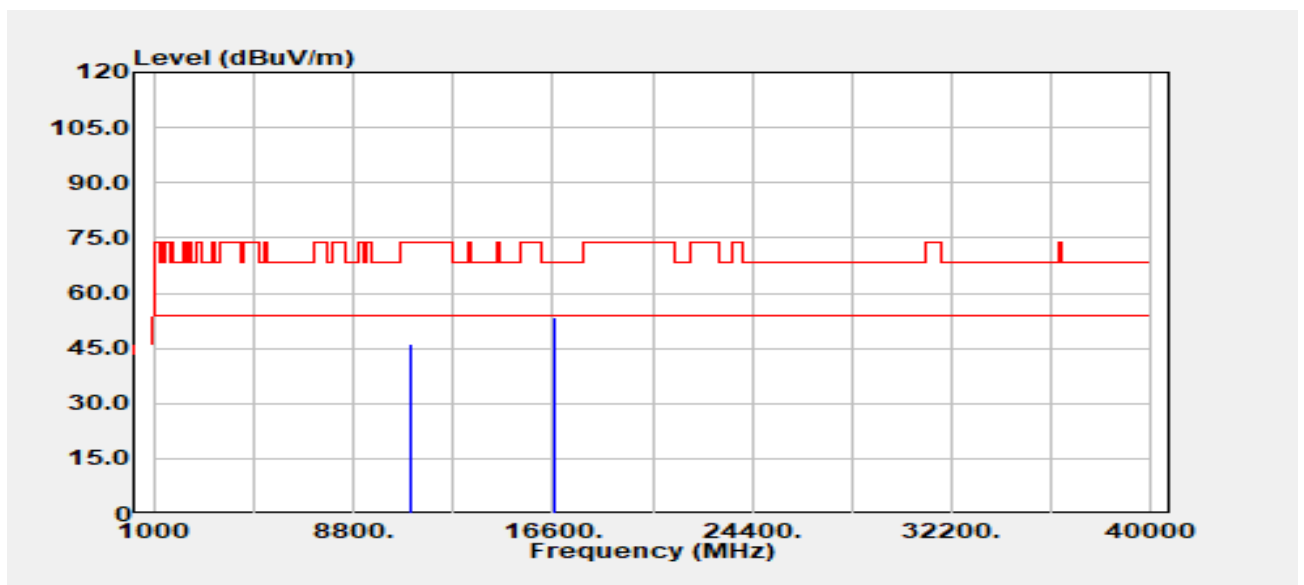


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.000	Peak	33.81	12.60	46.41	74.00	-27.59
11100.000	Average	24.16	12.60	36.76	54.00	-17.24
16650.000	Peak	33.35	19.99	53.34	68.20	-14.86

Report No.: TMWK2308002691KR

Page 358 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5550 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

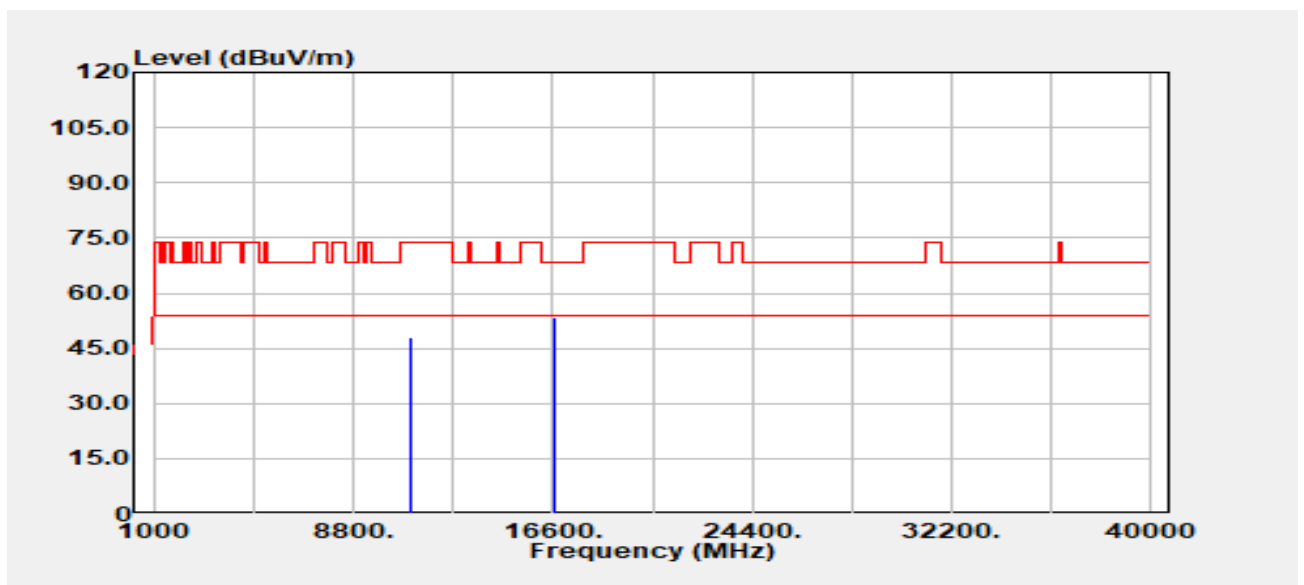


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.000	Peak	35.23	12.60	47.83	74.00	-26.17
11100.000	Average	24.83	12.60	37.43	54.00	-16.57
16650.000	Peak	33.61	19.99	53.59	68.20	-14.61

Report No.: TMWK2308002691KR

Page 359 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

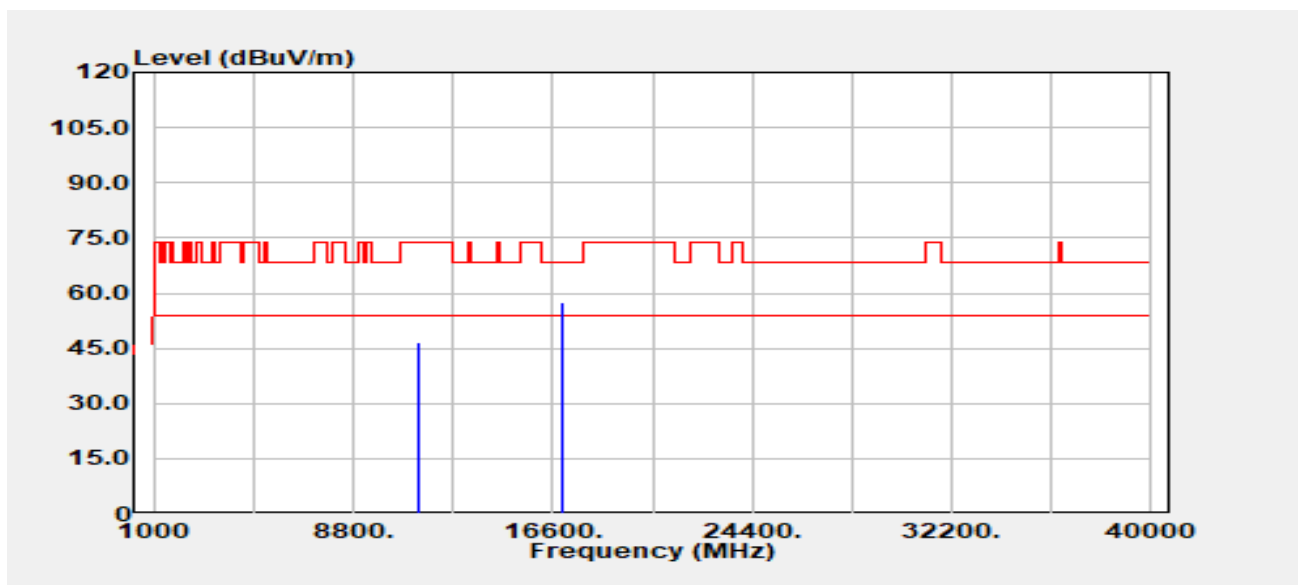


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.000	Peak	34.01	12.55	46.57	74.00	-27.43
11340.000	Average	24.21	12.55	36.76	54.00	-17.24
17010.000	Peak	32.33	25.32	57.64	68.20	-10.56

Report No.: TMWK2308002691KR

Page 360 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

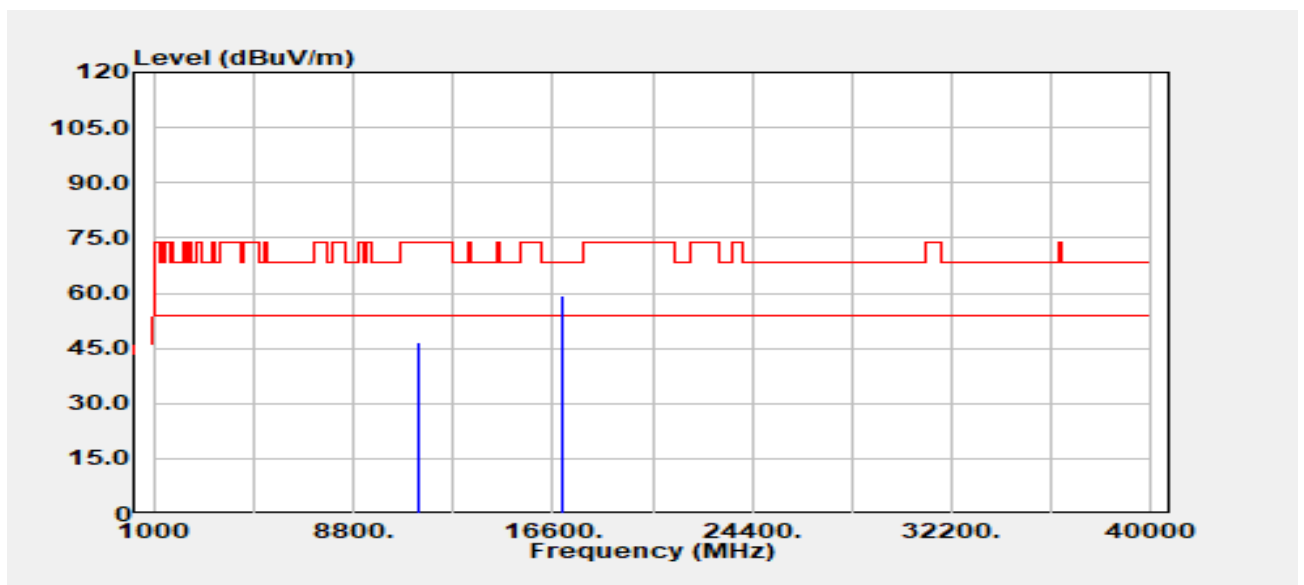


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.000	Peak	34.22	12.55	46.77	74.00	-27.23
11340.000	Average	24.62	12.55	37.17	54.00	-16.83
17010.000	Peak	33.95	25.32	59.27	68.20	-8.93

Report No.: TMWK2308002691KR

Page 361 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

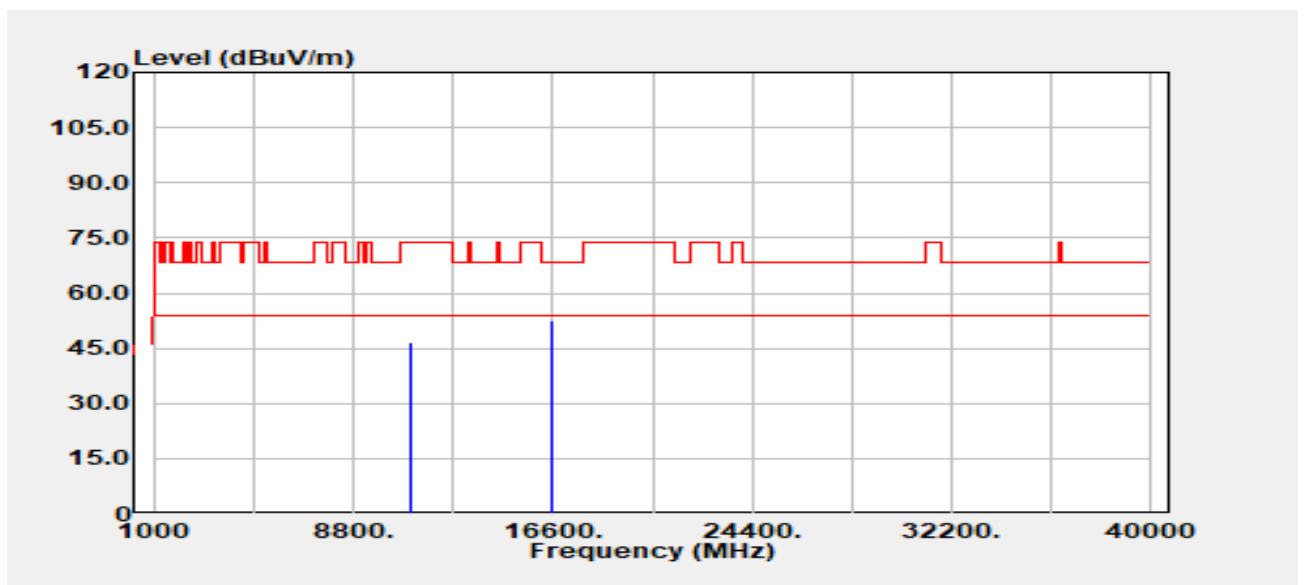


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11060.000	Peak	34.21	12.40	46.60	74.00	-27.40
11060.000	Average	24.93	12.40	37.33	54.00	-16.67
16590.000	Peak	33.48	19.22	52.70	68.20	-15.50

Report No.: TMWK2308002691KR

Page 362 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

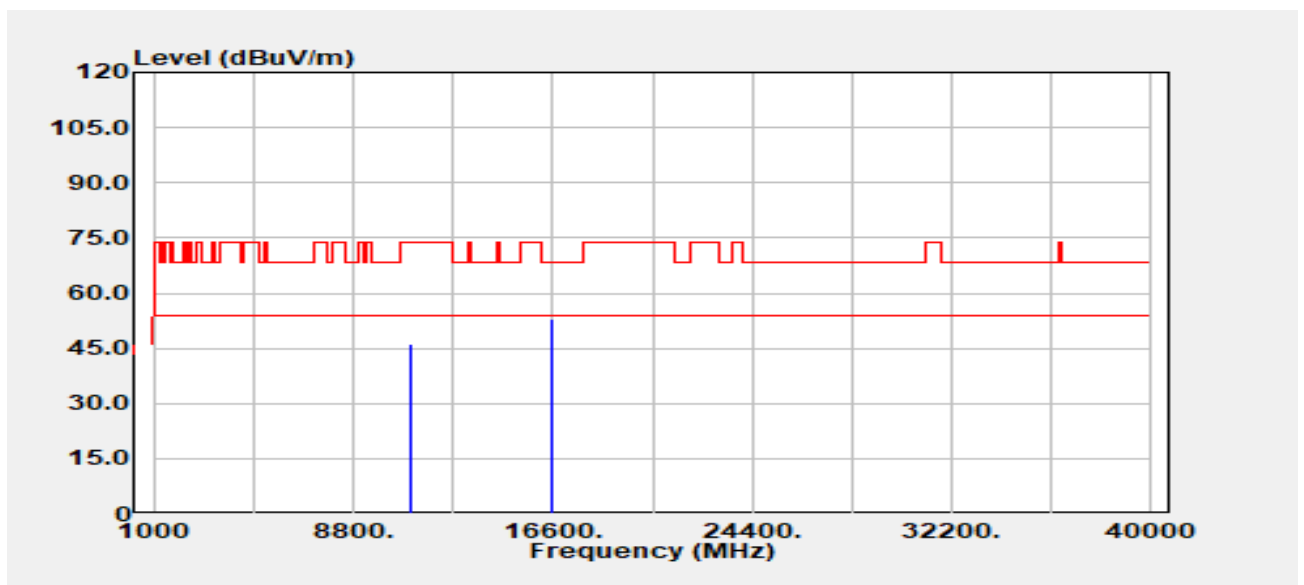


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.000	Peak	33.92	12.40	46.31	74.00	-27.69
11060.000	Average	25.02	12.40	37.42	54.00	-16.58
16590.000	Peak	33.94	19.22	53.16	68.20	-15.04

Report No.: TMWK2308002691KR

Page 363 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony.Chao
Test Chamber : 966A

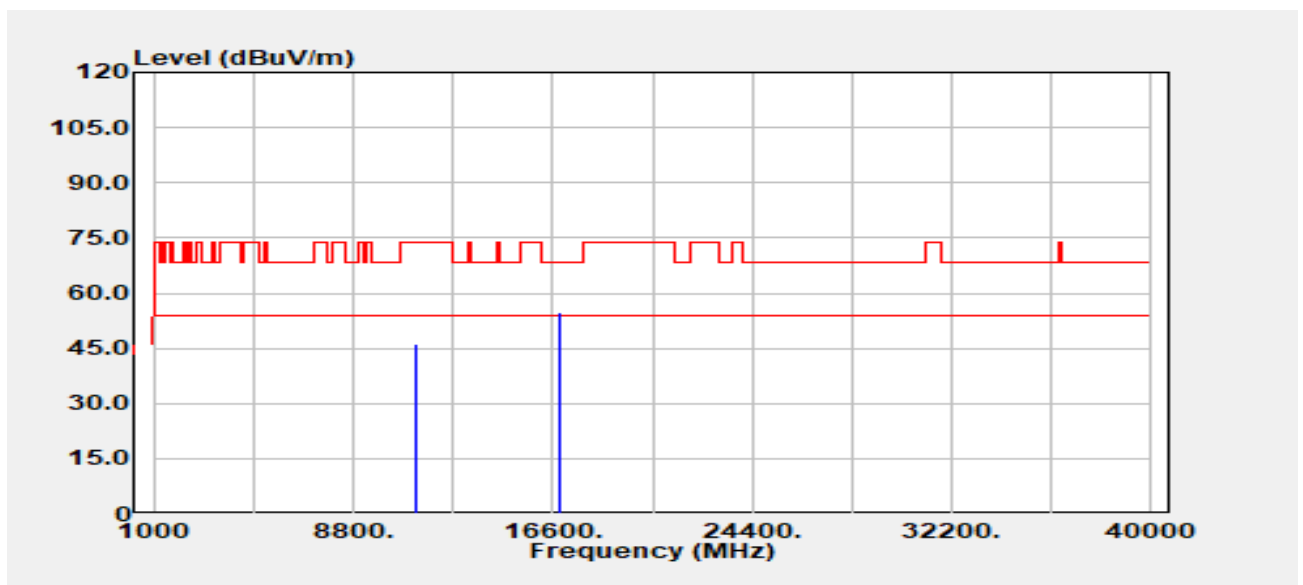


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11220.000	Peak	33.66	12.60	46.27	74.00	-27.73
11220.000	Average	24.87	12.60	37.47	54.00	-16.53
16830.000	Peak	32.64	22.01	54.65	68.20	-13.55

Report No.: TMWK2308002691KR

Page 364 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

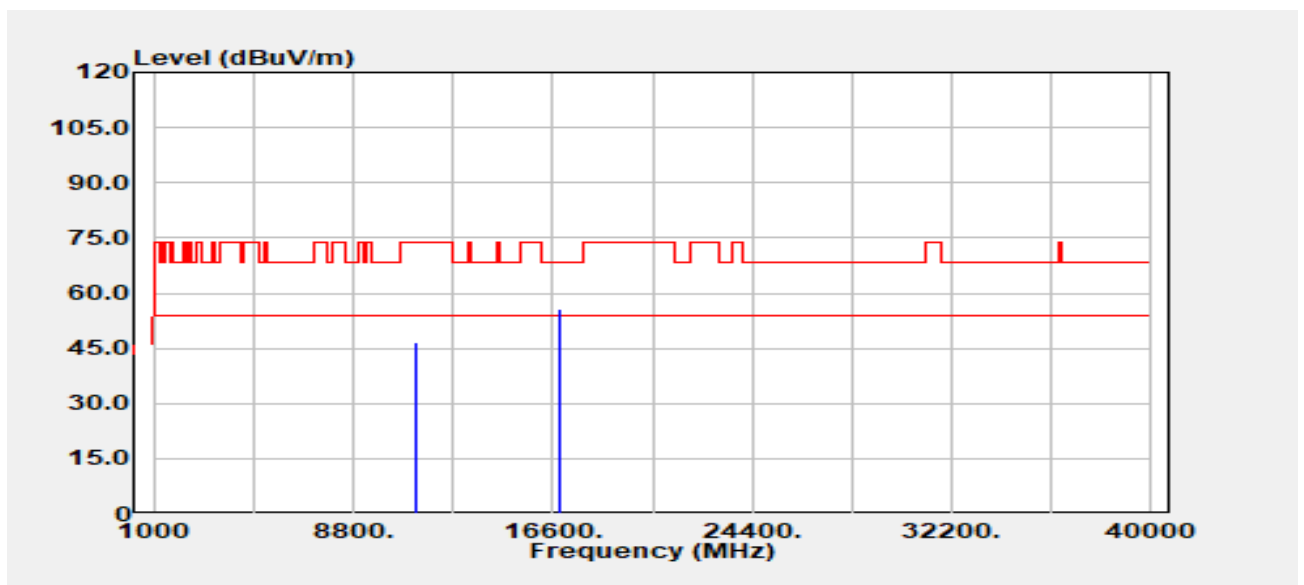


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11220.000	Peak	34.21	12.60	46.81	74.00	-27.19
11220.000	Average	25.01	12.60	37.61	54.00	-16.39
16830.000	Peak	33.60	22.01	55.60	68.20	-12.60

Report No.: TMWK2308002691KR

Page 365 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3~4
Frequency :5720 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

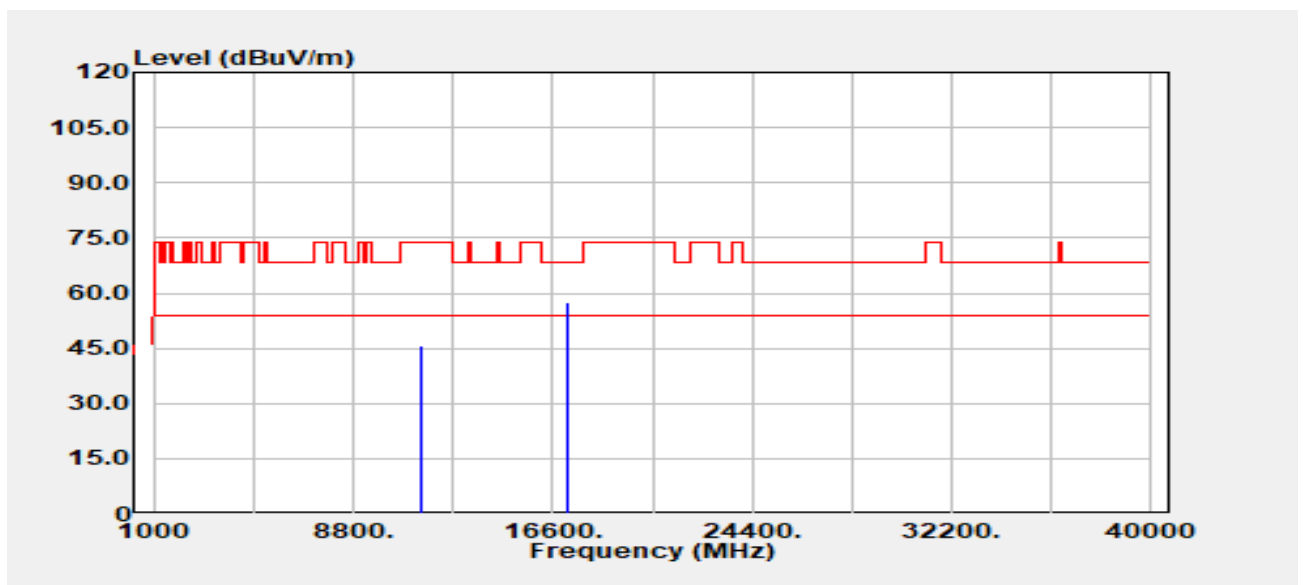


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11440.000	Peak	33.40	12.33	45.72	74.00	-28.28
11440.000	Average	23.46	12.33	35.78	54.00	-18.22
17160.000	Peak	31.27	26.20	57.46	68.20	-10.74

Report No.: TMWK2308002691KR

Page 366 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band3~4
Frequency :5720 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

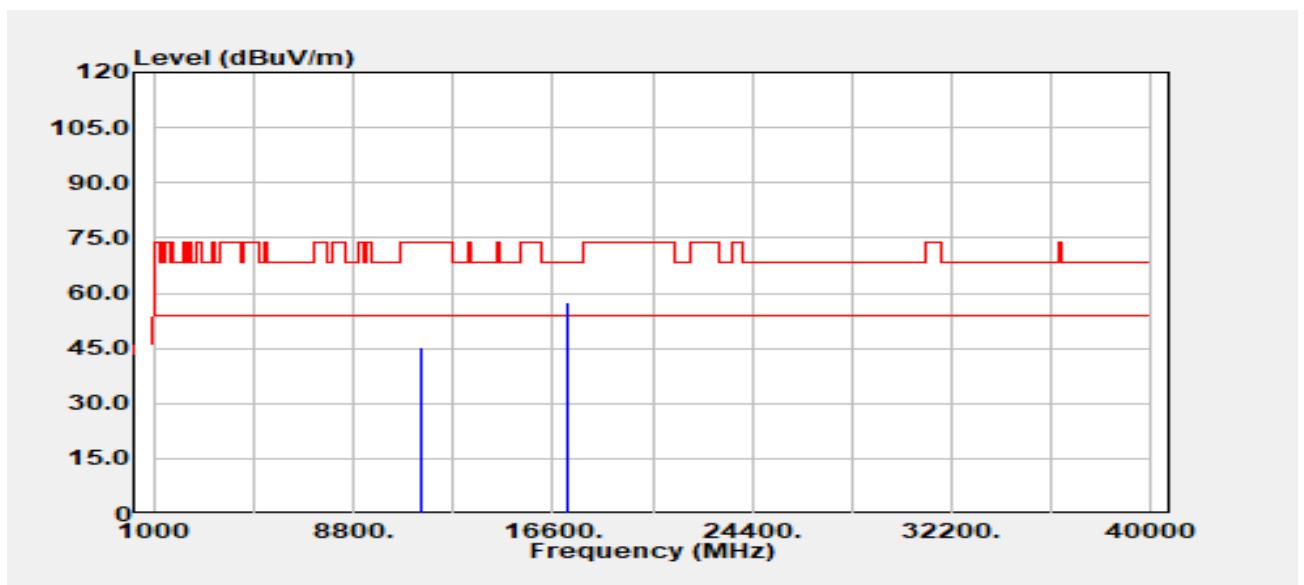


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11440.000	Peak	32.98	12.33	45.31	74.00	-28.69
11440.000	Average	23.34	12.33	35.67	54.00	-18.33
17160.000	Peak	31.47	26.20	57.67	68.20	-10.53

Report No.: TMWK2308002691KR

Page 367 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3~4
Frequency :5720 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

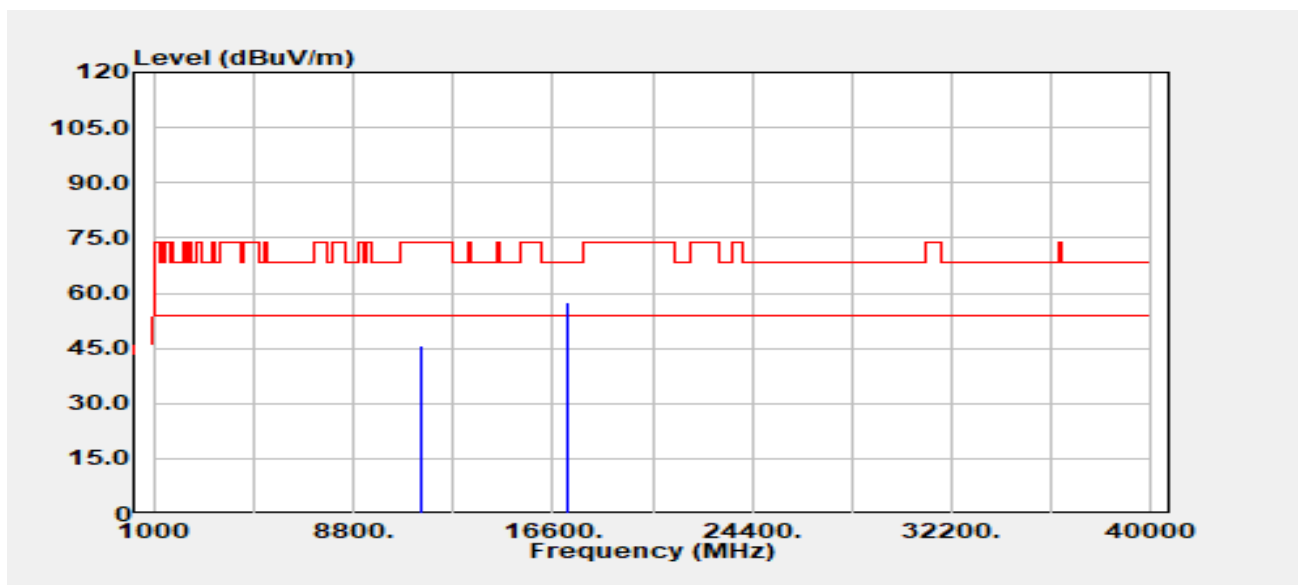


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11440.000	Peak	33.32	12.33	45.64	74.00	-28.36
11440.000	Average	23.46	12.33	35.79	54.00	-18.21
17160.000	Peak	31.34	26.20	57.53	68.20	-10.67

Report No.: TMWK2308002691KR

Page 368 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band3~4
Frequency :5720 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-30
Temp./Humi. :24.6/58
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

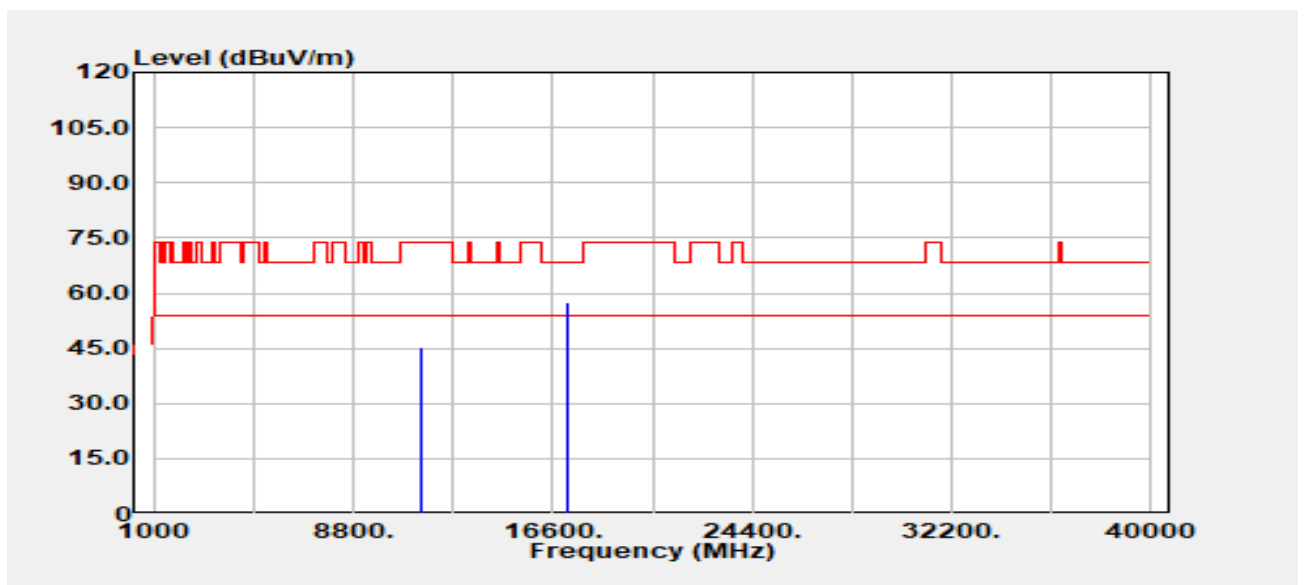


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11440.000	Peak	33.06	12.33	45.38	74.00	-28.62
11440.000	Average	23.41	12.33	35.73	54.00	-18.27
17160.000	Peak	31.31	26.20	57.51	68.20	-10.69

Report No.: TMWK2308002691KR

Page 369 / 391
Rev.: 00

Project Number	:TM-2308000057P	Test Date	:2023-08-31
Operation Band	:802.11n40/Band3~4	Temp./Humi.	:24.6/57
Frequency	:5710 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony.Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

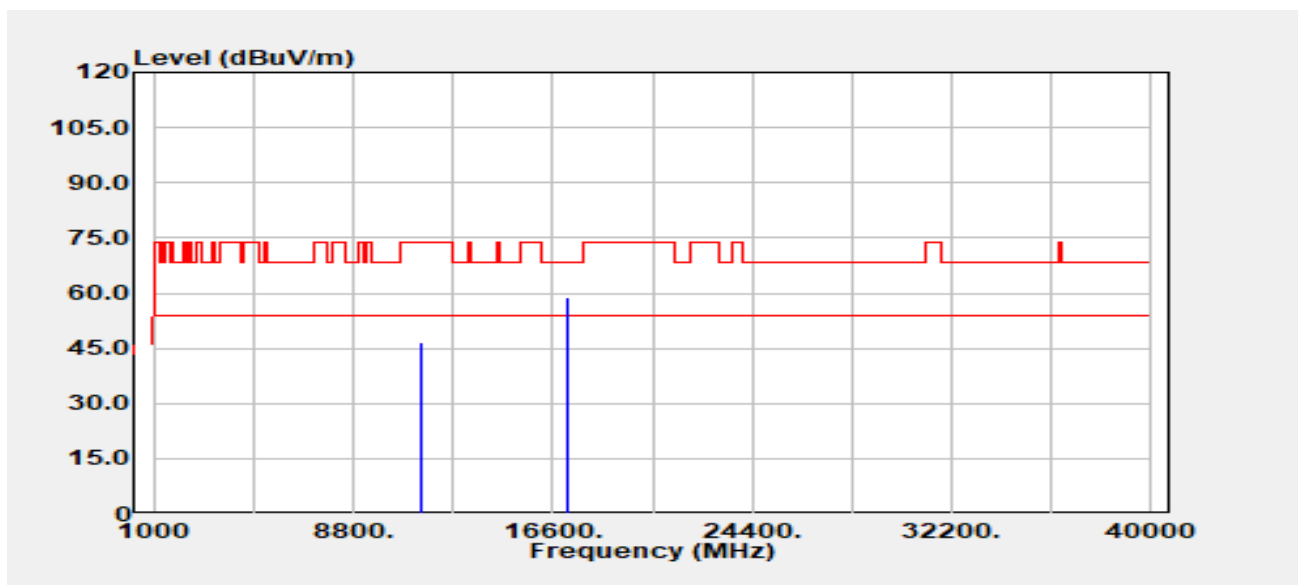


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11420.000	Peak	34.22	12.36	46.58	74.00	-27.42
11420.000	Average	24.61	12.36	36.97	54.00	-17.03
17130.000	Peak	33.03	26.00	59.03	68.20	-9.17

Report No.: TMWK2308002691KR

Page 370 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band3~4
Frequency :5710 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

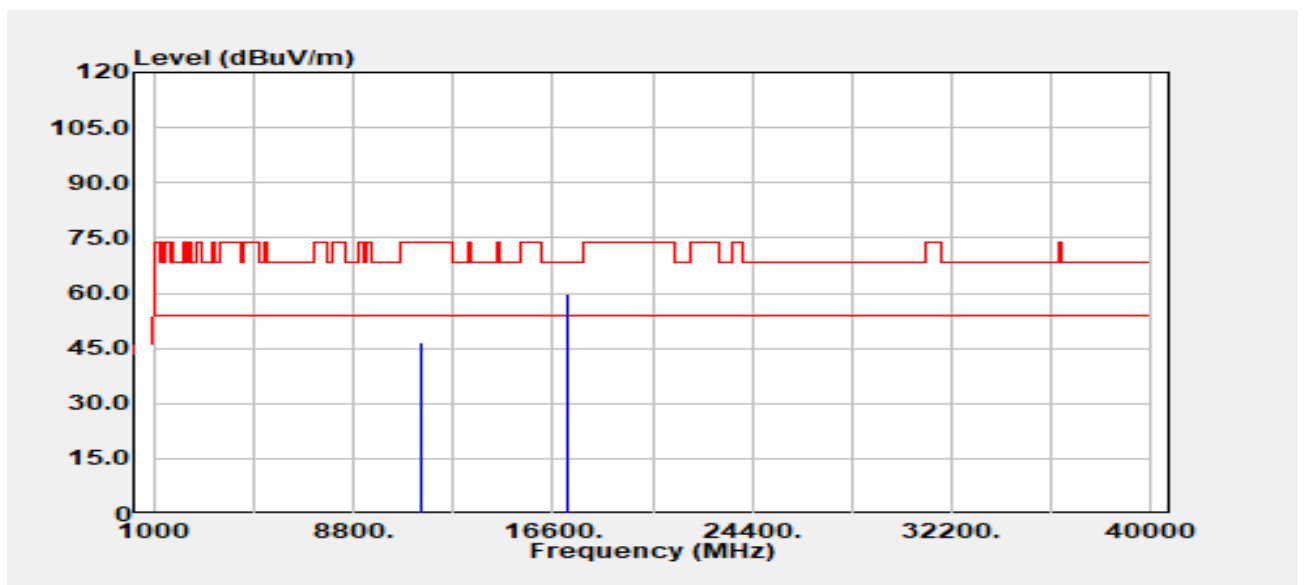


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11420.000	Peak	34.21	12.36	46.57	74.00	-27.43
11420.000	Average	24.77	12.36	37.13	54.00	-16.87
17130.000	Peak	33.58	26.00	59.58	68.20	-8.62

Report No.: TMWK2308002691KR

Page 371 / 391
Rev.: 00

Project Number	:TM-2308000057P	Test Date	:2023-08-31
Operation Band	:802.11ac80/Band3~4	Temp./Humi.	:24.6/57
Frequency	:5690 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony.Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

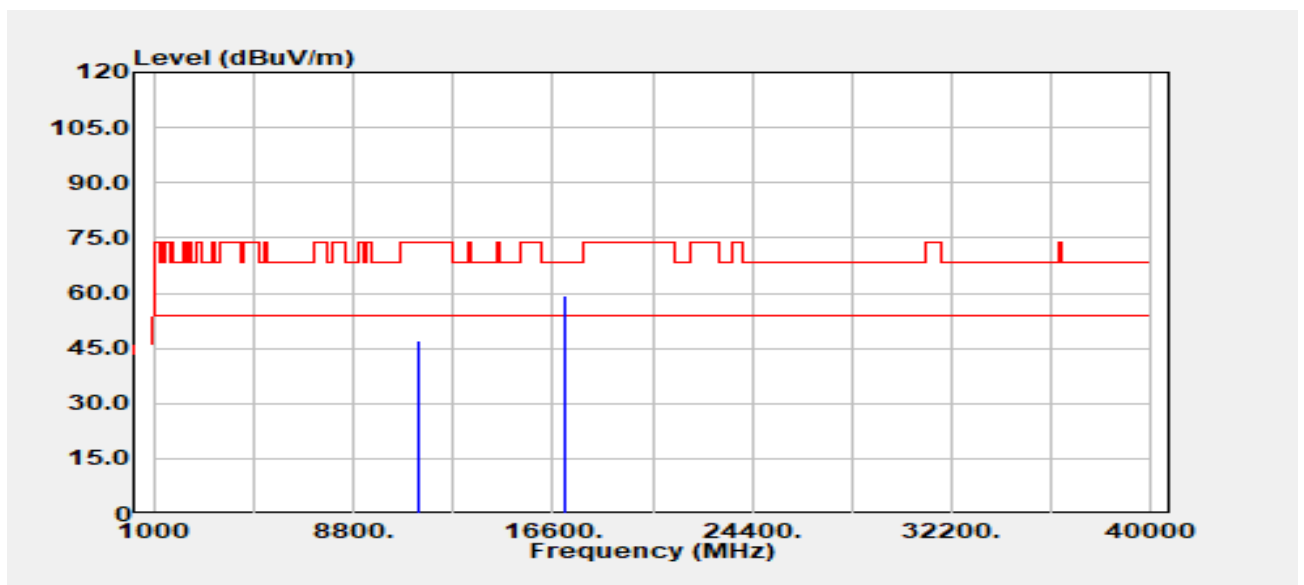


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11380.000	Peak	34.66	12.47	47.12	74.00	-26.88
11380.000	Average	24.86	12.47	37.33	54.00	-16.67
17070.000	Peak	33.78	25.70	59.48	68.20	-8.72

Report No.: TMWK2308002691KR

Page 372 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band3~4
Frequency :5690 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony.Chao
Test Chamber : 966A

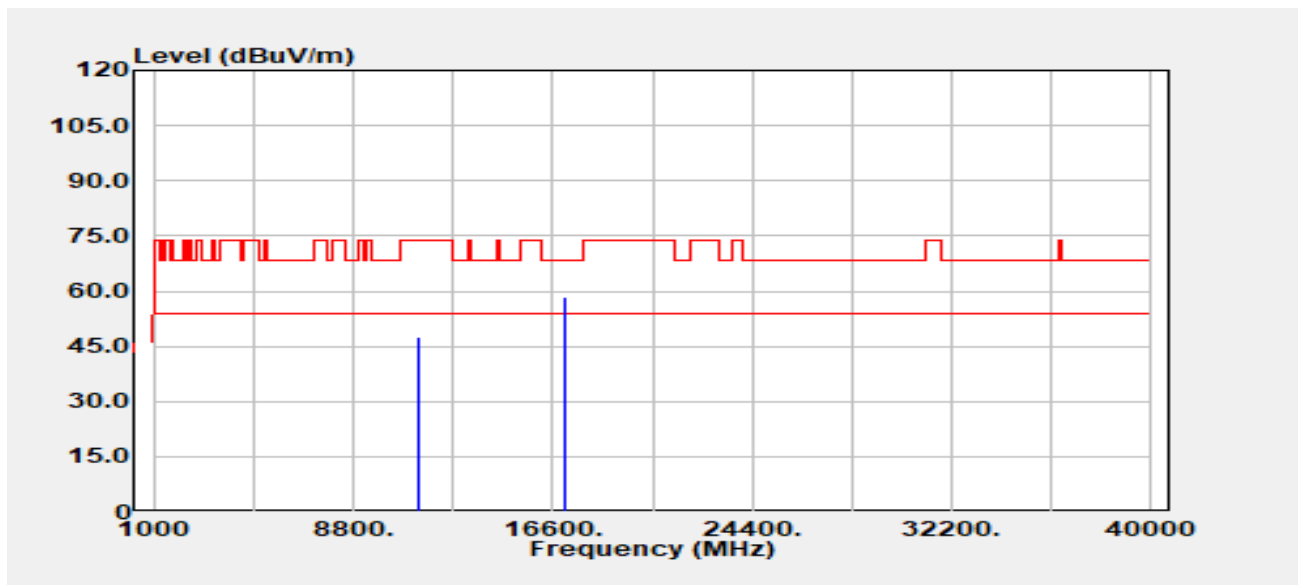


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11380.000	Peak	34.95	12.47	47.42	74.00	-26.58
11380.000	Average	24.78	12.47	37.25	54.00	-16.75
17070.000	Peak	32.63	25.70	58.34	68.20	-9.86

Report No.: TMWK2308002691KR

Page 373 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

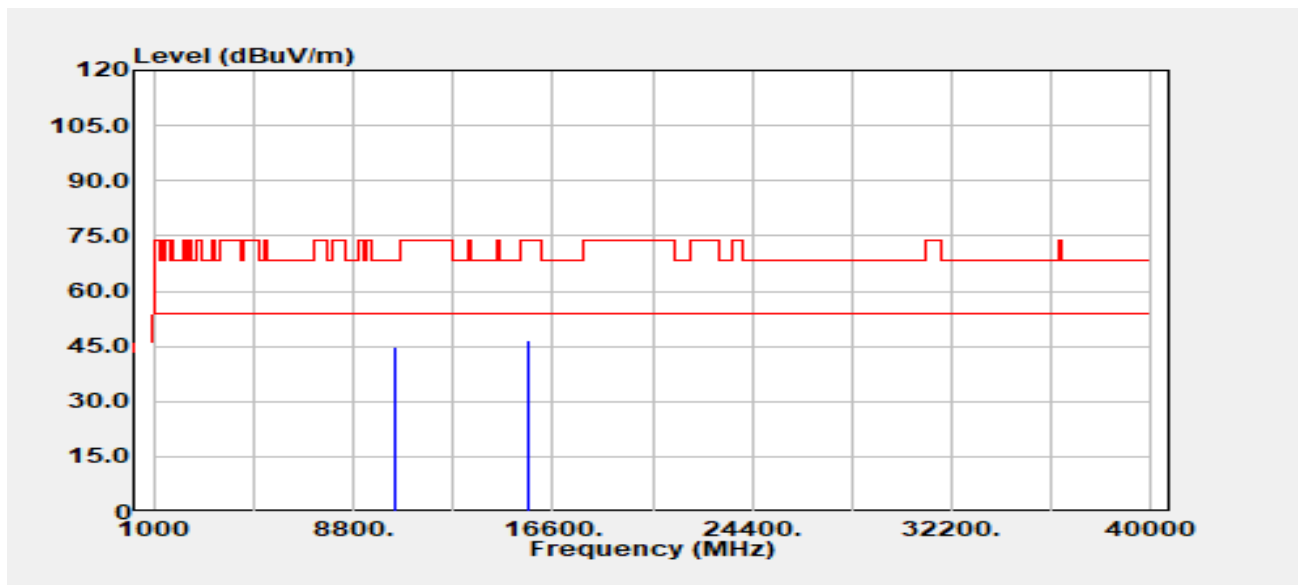


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.000	Peak	33.84	11.21	45.05	68.20	-23.15
15630.000	Peak	33.37	13.06	46.43	74.00	-27.57
15630.000	Average	24.51	13.06	37.56	54.00	-16.44

Report No.: TMWK2308002691KR

Page 374 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

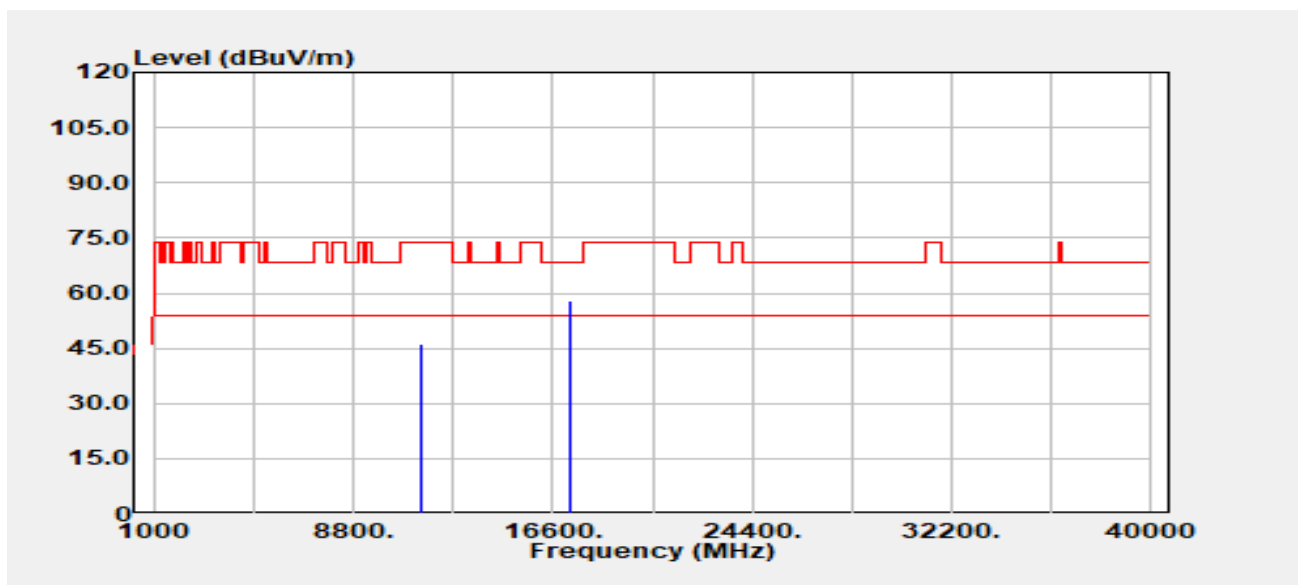


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.000	Peak	33.96	12.39	46.35	74.00	-27.65
11490.000	Average	24.68	12.39	37.07	54.00	-16.93
17235.000	Peak	32.02	26.10	58.13	68.20	-10.07

Report No.: TMWK2308002691KR

Page 375 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

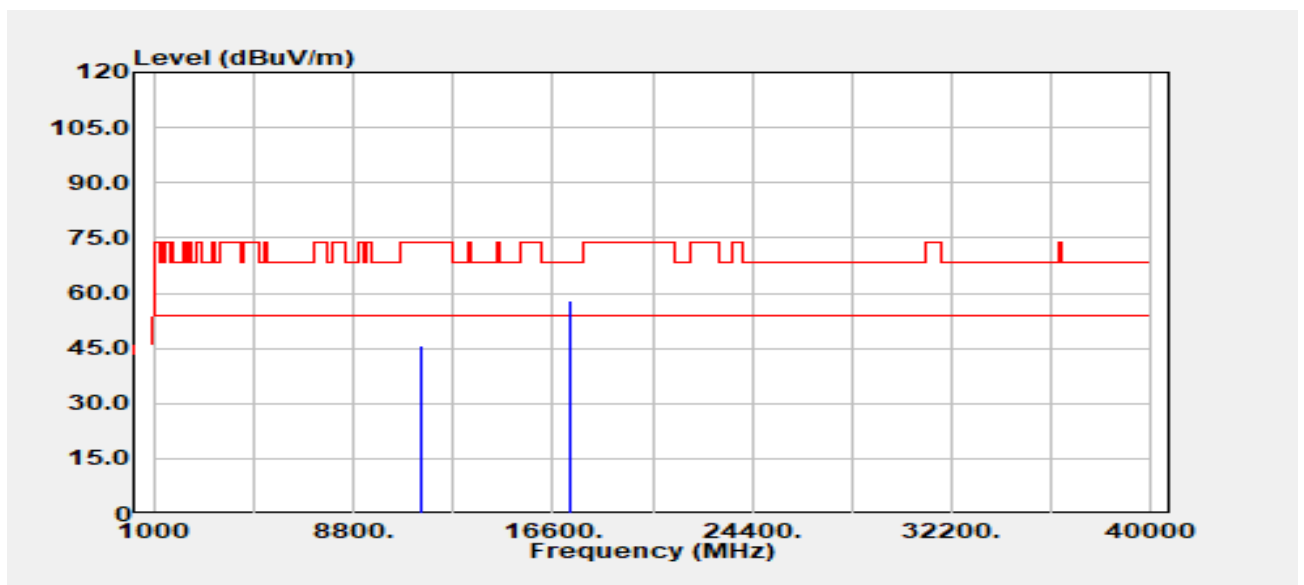


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11490.000	Peak	33.22	12.39	45.61	74.00	-28.39
11490.000	Average	24.61	12.39	37.00	54.00	-17.00
17235.000	Peak	31.77	26.10	57.87	68.20	-10.33

Report No.: TMWK2308002691KR

Page 376 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

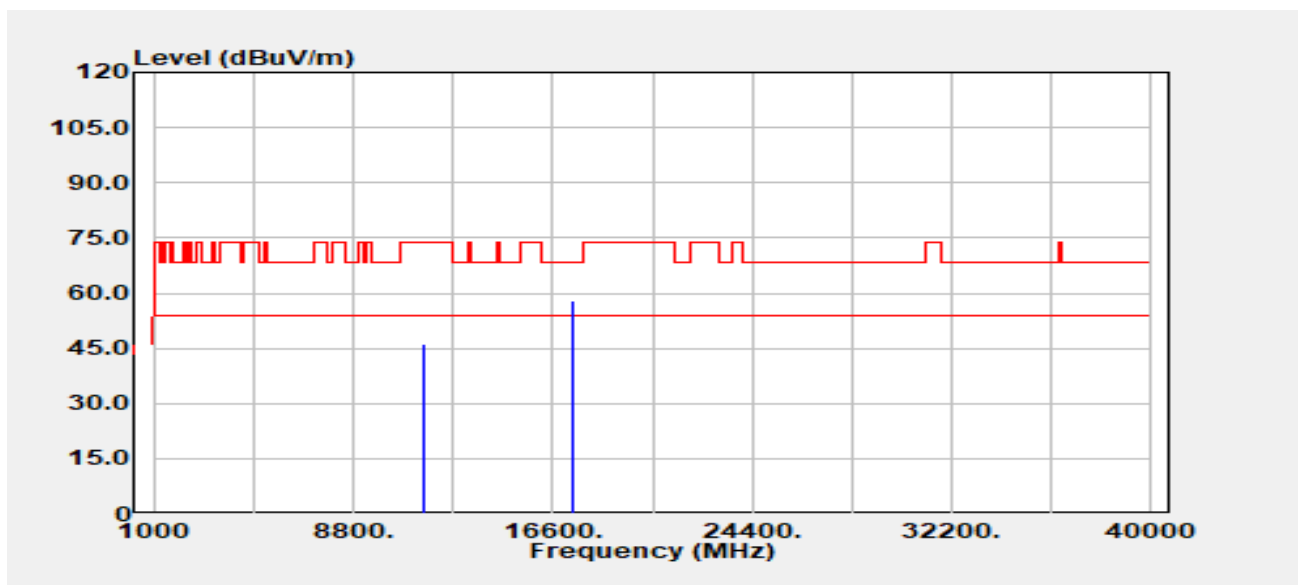


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.000	Peak	33.56	12.49	46.06	74.00	-27.94
11570.000	Average	24.66	12.49	37.16	54.00	-16.84
17355.000	Peak	32.56	25.47	58.03	68.20	-10.17

Report No.: TMWK2308002691KR

Page 377 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

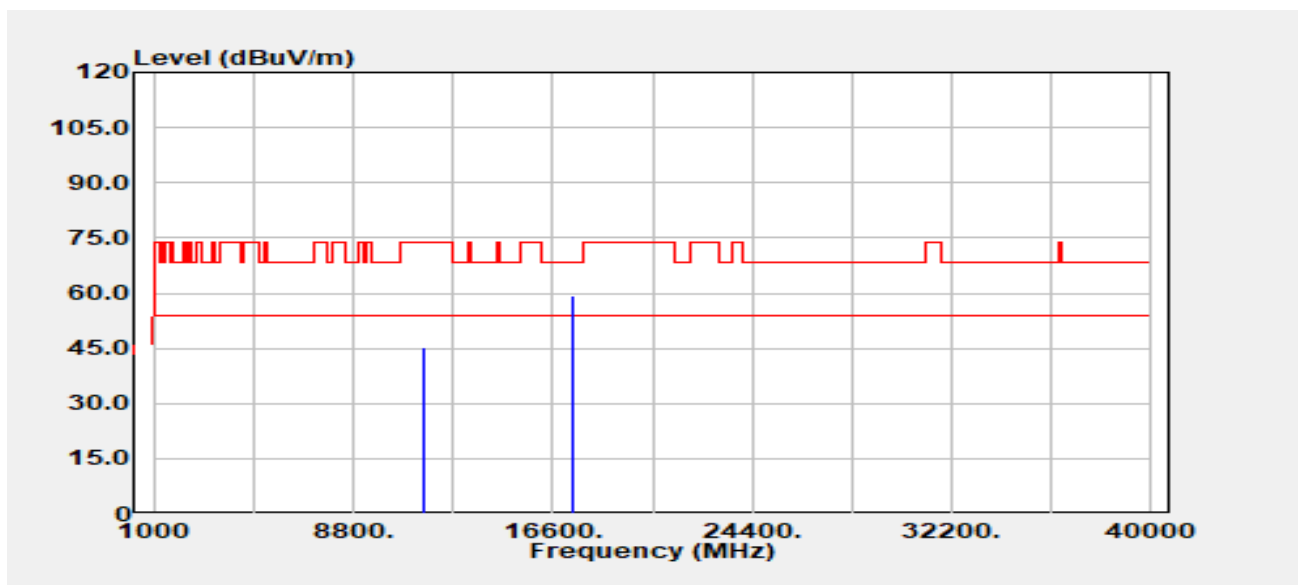


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.000	Peak	32.93	12.49	45.43	74.00	-28.57
11570.000	Average	24.53	12.49	37.02	54.00	-16.98
17355.000	Peak	33.63	25.47	59.10	68.20	-9.10

Report No.: TMWK2308002691KR

Page 378 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

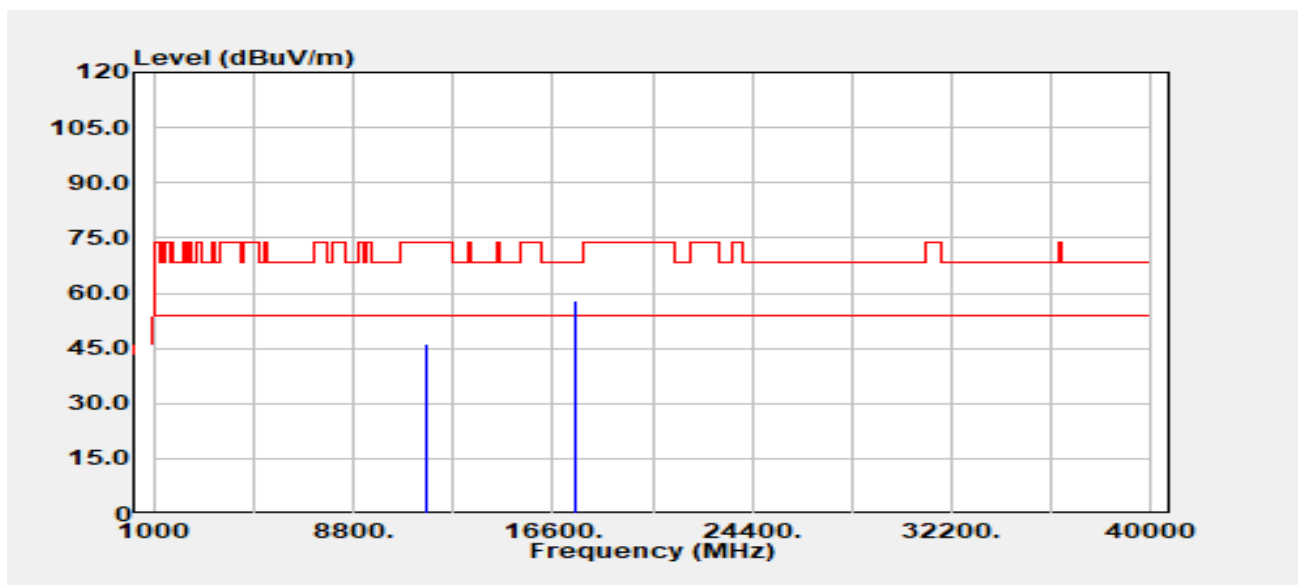


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.000	Peak	33.94	12.43	46.37	74.00	-27.63
11650.000	Average	24.46	12.43	36.89	54.00	-17.11
17475.000	Peak	33.08	25.06	58.14	68.20	-10.06

Report No.: TMWK2308002691KR

Page 379 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-08-31
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

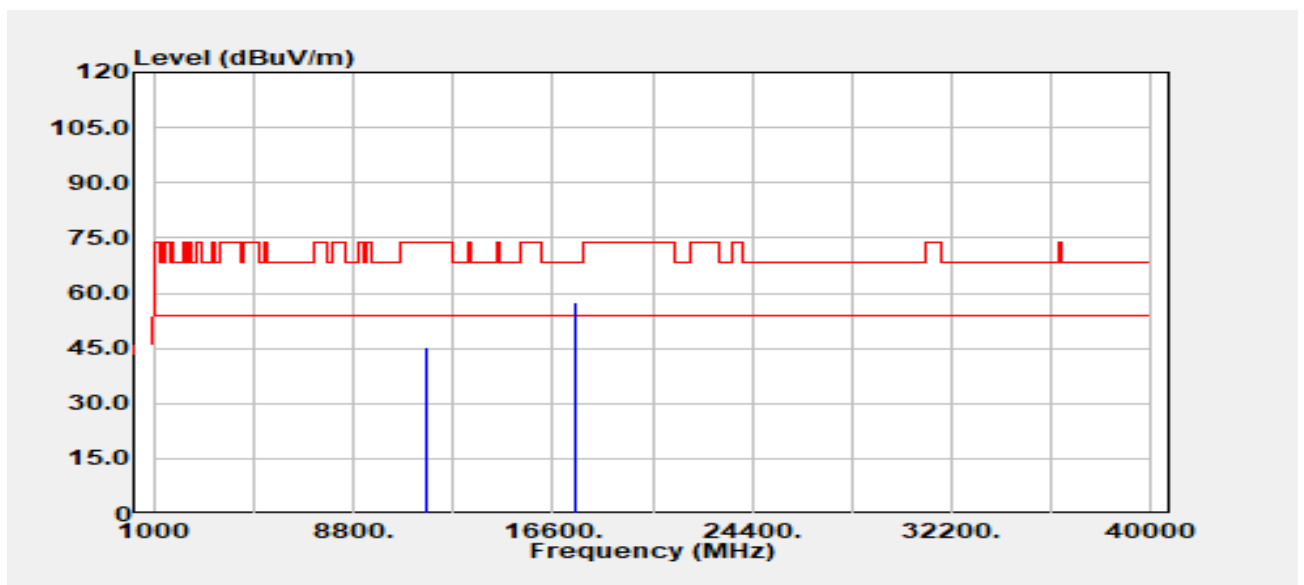


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11650.000	Peak	32.94	12.43	45.37	74.00	-28.63
11650.000	Average	24.60	12.43	37.02	54.00	-16.98
17475.000	Peak	32.35	25.06	57.41	68.20	-10.79

Report No.: TMWK2308002691KR

Page 380 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

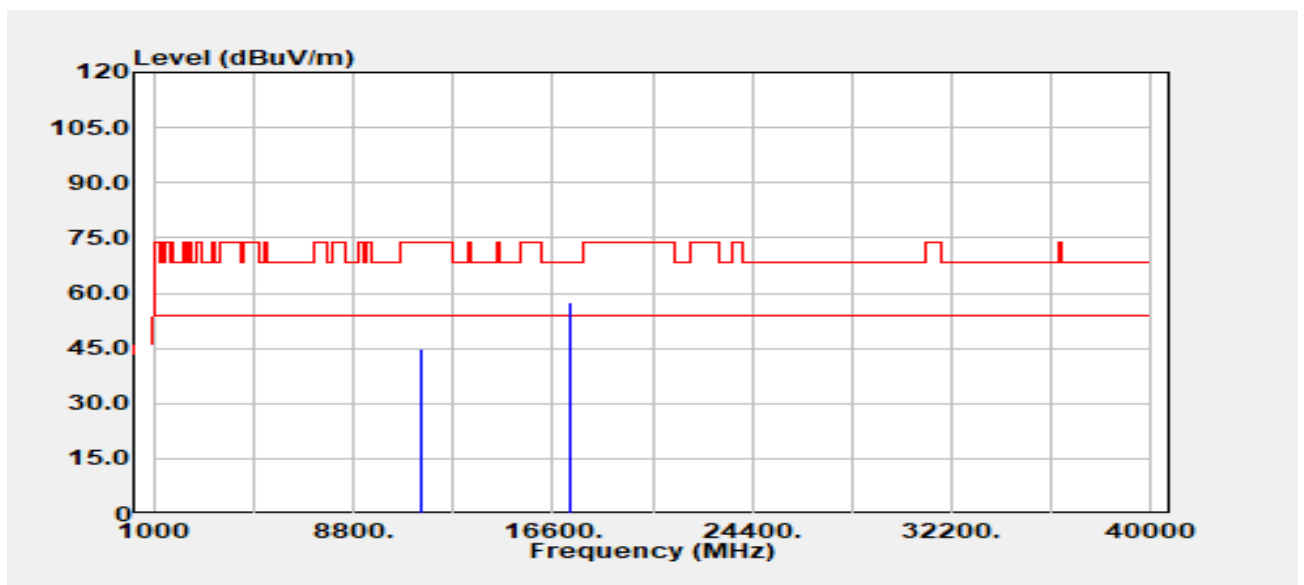


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.000	Peak	32.50	12.39	44.89	74.00	-29.11
11490.000	Average	24.15	12.39	36.54	54.00	-17.46
17235.000	Peak	31.19	26.10	57.29	68.20	-10.91

Report No.: TMWK2308002691KR

Page 381 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

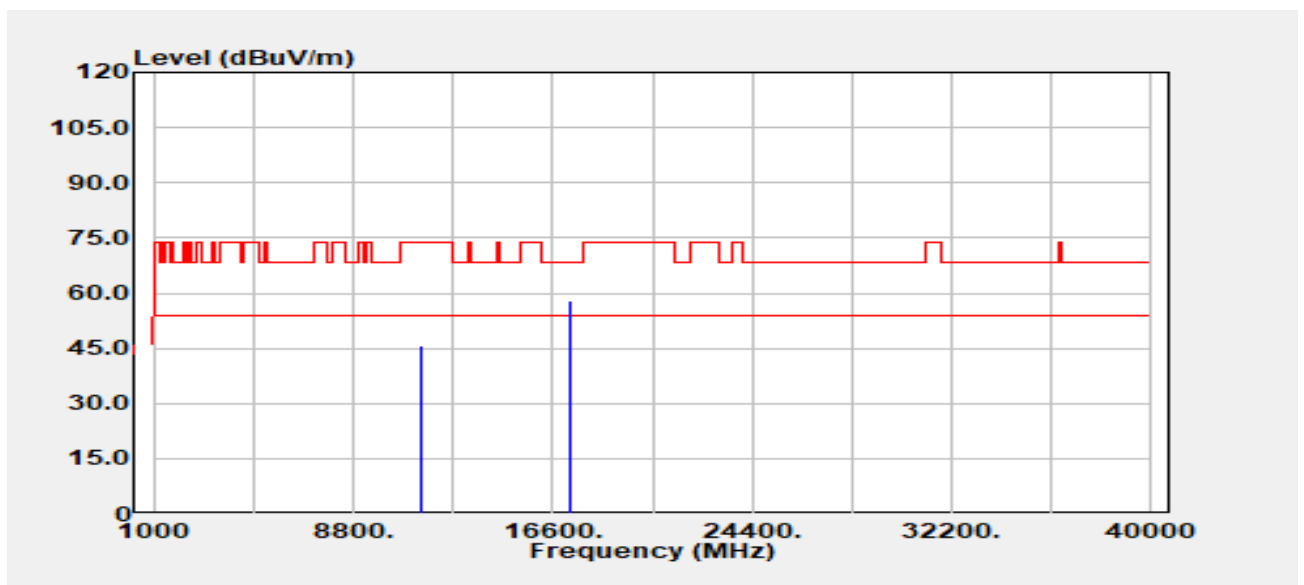


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.000	Peak	33.28	12.39	45.67	74.00	-28.33
11490.000	Average	24.01	12.39	36.40	54.00	-17.60
17235.000	Peak	31.86	26.10	57.96	68.20	-10.24

Report No.: TMWK2308002691KR

Page 382 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

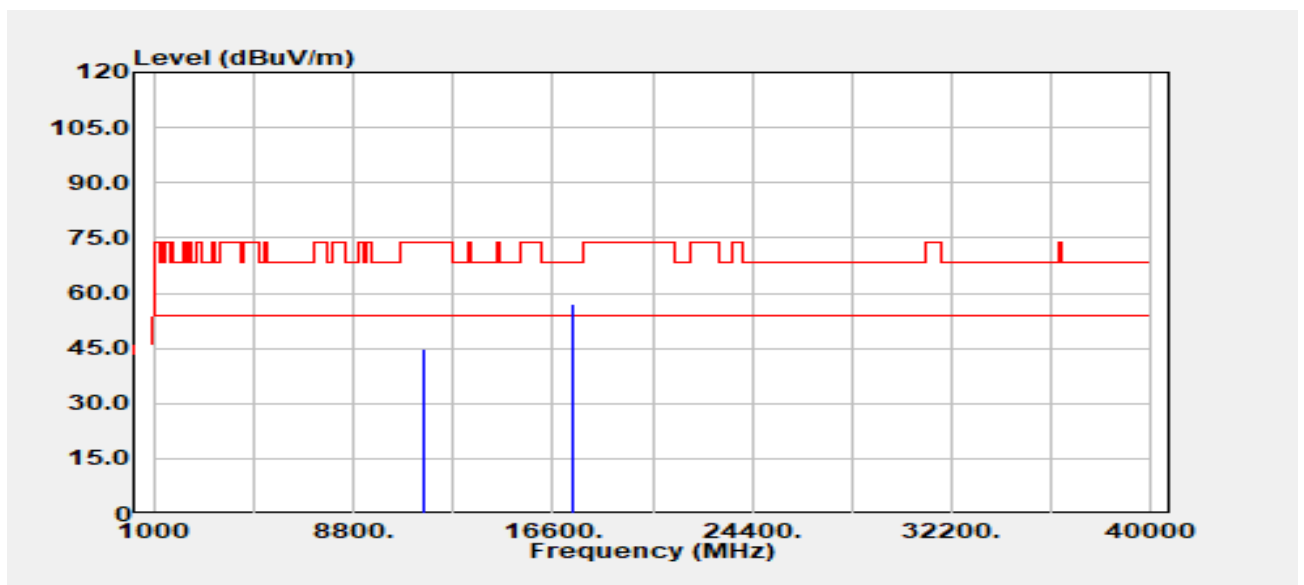


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.000	Peak	32.42	12.49	44.91	74.00	-29.09
11570.000	Average	23.84	12.49	36.33	54.00	-17.67
17355.000	Peak	31.54	25.47	57.01	68.20	-11.19

Report No.: TMWK2308002691KR

Page 383 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

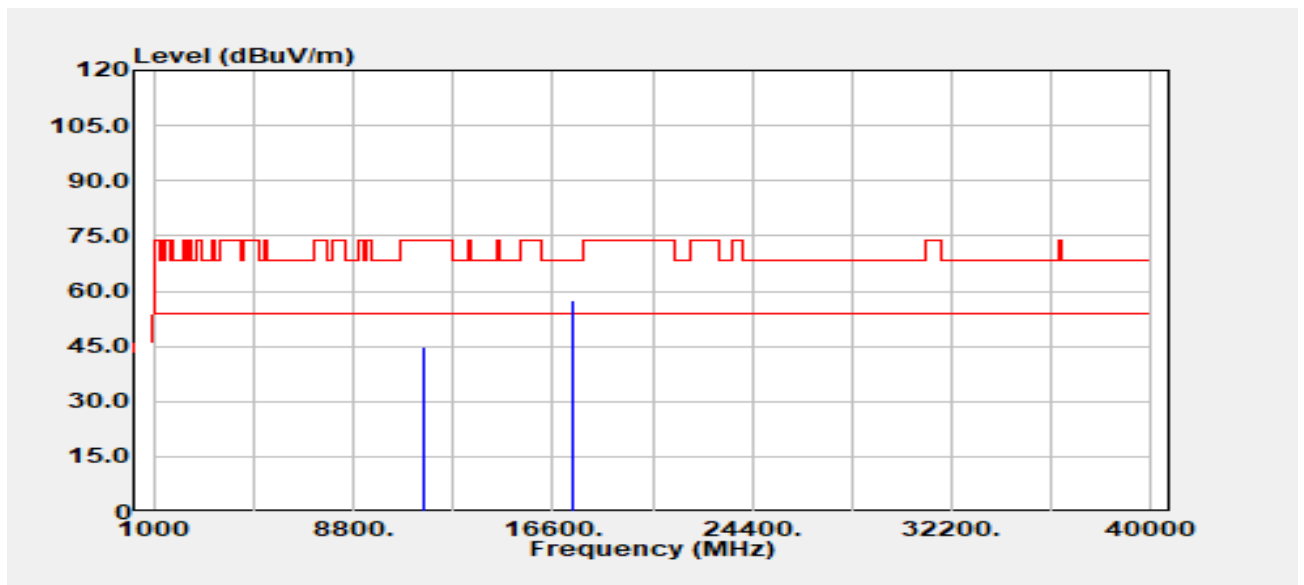


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.000	Peak	32.53	12.49	45.02	74.00	-28.98
11570.000	Average	23.96	12.49	36.45	54.00	-17.55
17355.000	Peak	32.01	25.47	57.48	68.20	-10.72

Report No.: TMWK2308002691KR

Page 384 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

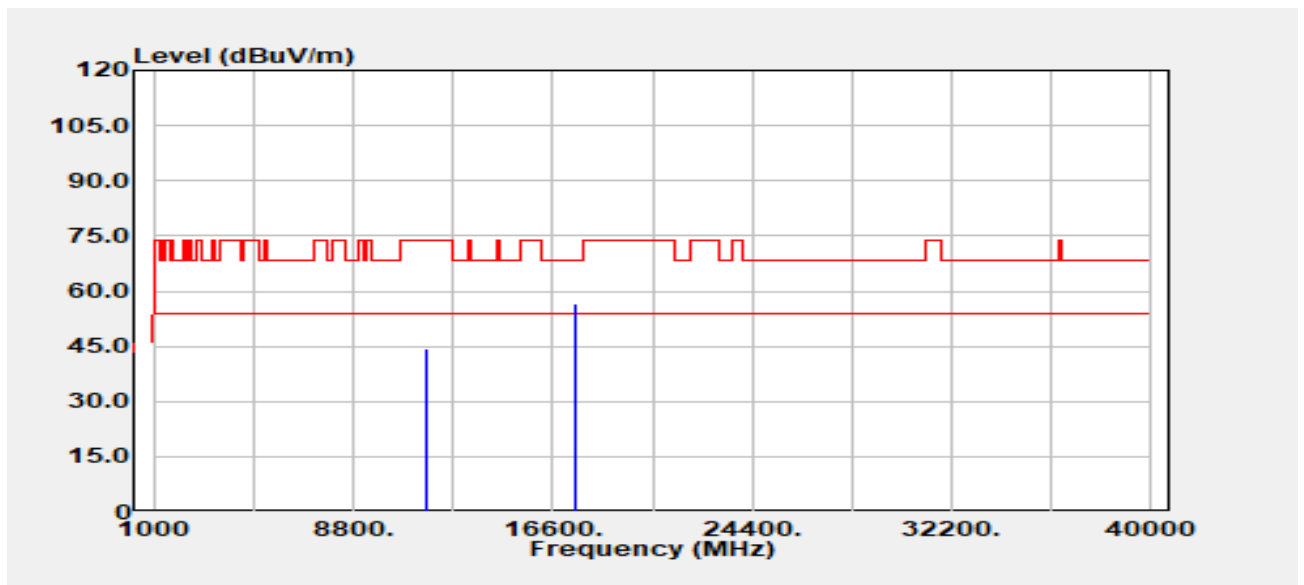


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11650.000	Peak	32.06	12.43	44.48	74.00	-29.52
11650.000	Average	23.86	12.43	36.28	54.00	-17.72
17475.000	Peak	31.57	25.06	56.63	68.20	-11.57

Report No.: TMWK2308002691KR

Page 385 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

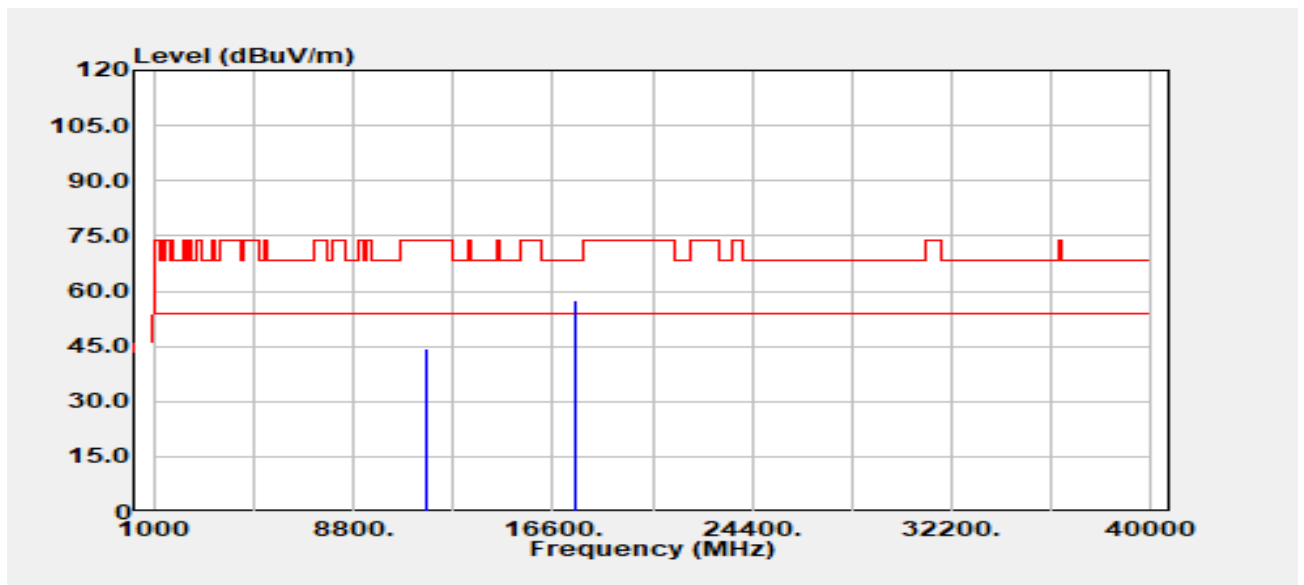


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.000	Peak	31.96	12.43	44.38	74.00	-29.62
11650.000	Average	24.08	12.43	36.50	54.00	-17.50
17475.000	Peak	32.52	25.06	57.58	68.20	-10.62

Report No.: TMWK2308002691KR

Page 386 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

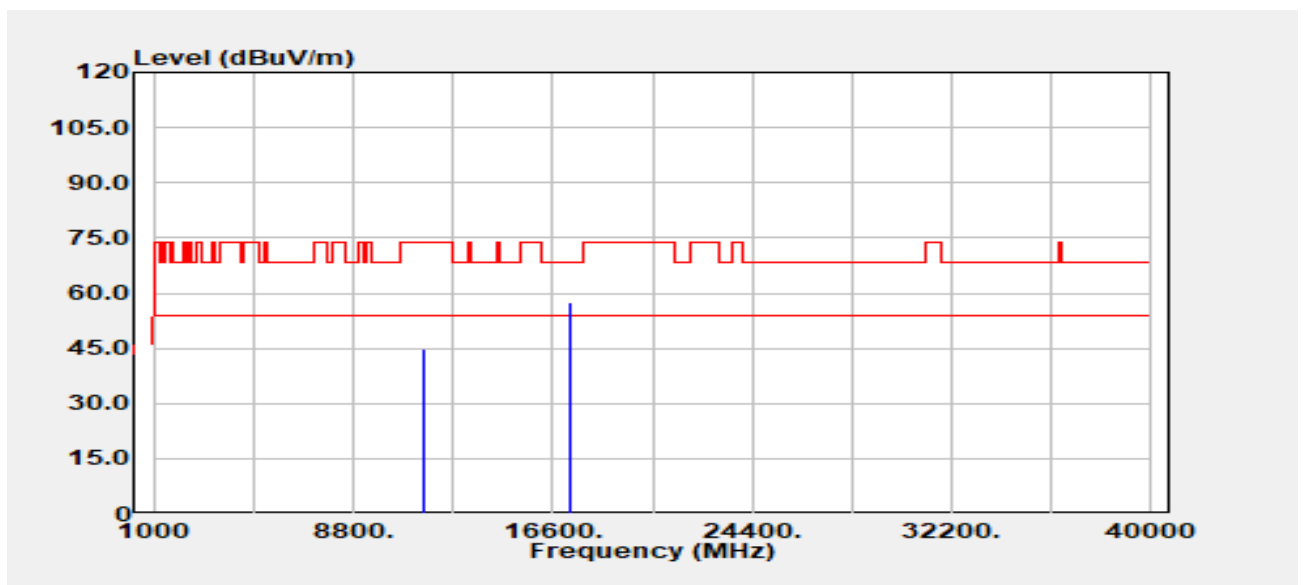


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.000	Peak	32.45	12.43	44.87	74.00	-29.13
11510.000	Average	23.97	12.43	36.40	54.00	-17.60
17265.000	Peak	31.54	26.14	57.68	68.20	-10.52

Report No.: TMWK2308002691KR

Page 387 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

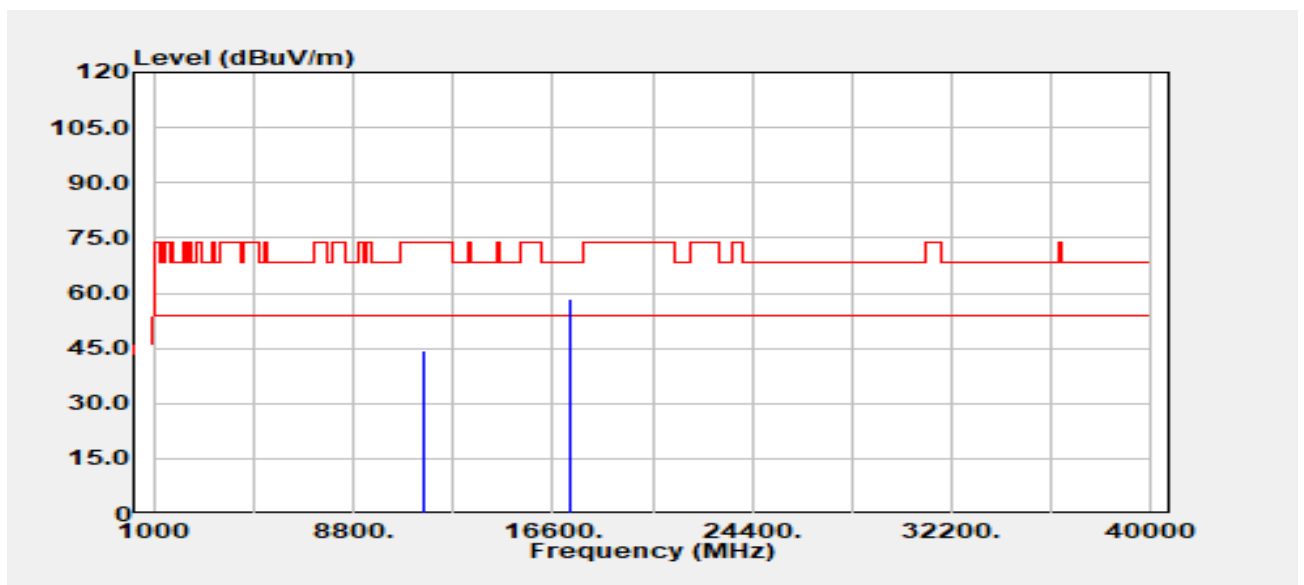


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.000	Peak	31.95	12.43	44.38	74.00	-29.62
11510.000	Average	24.00	12.43	36.42	54.00	-17.58
17265.000	Peak	32.35	26.14	58.49	68.20	-9.71

Report No.: TMWK2308002691KR

Page 388 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

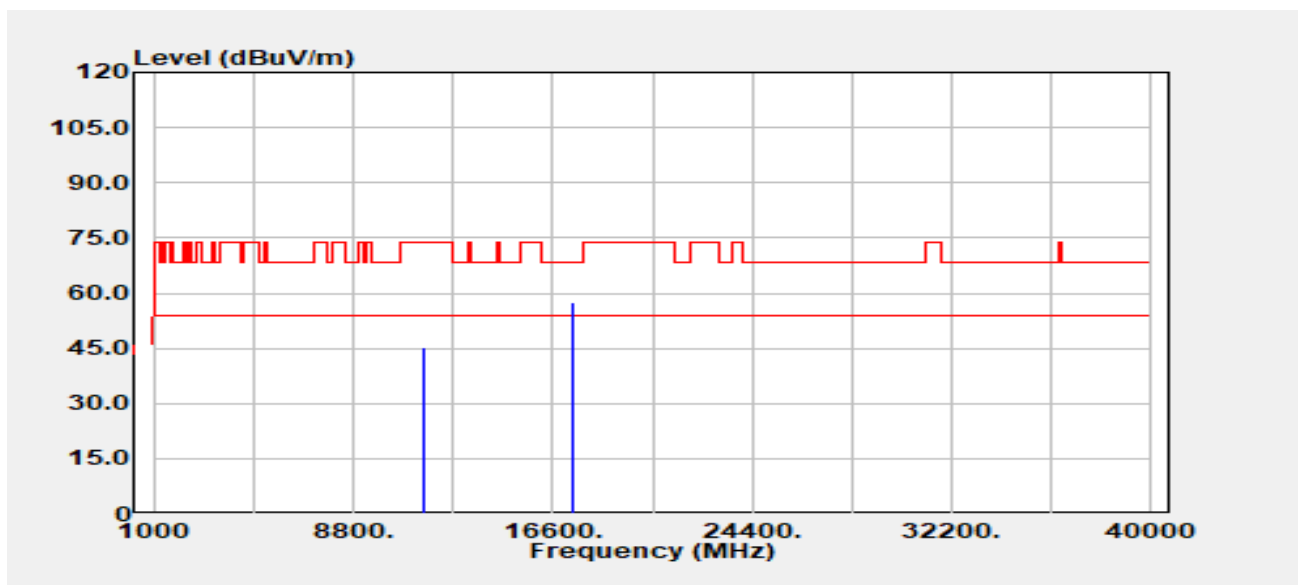


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.000	Peak	32.86	12.48	45.34	74.00	-28.66
11590.000	Average	23.98	12.48	36.46	54.00	-17.54
17385.000	Peak	32.27	25.27	57.54	68.20	-10.66

Report No.: TMWK2308002691KR

Page 389 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

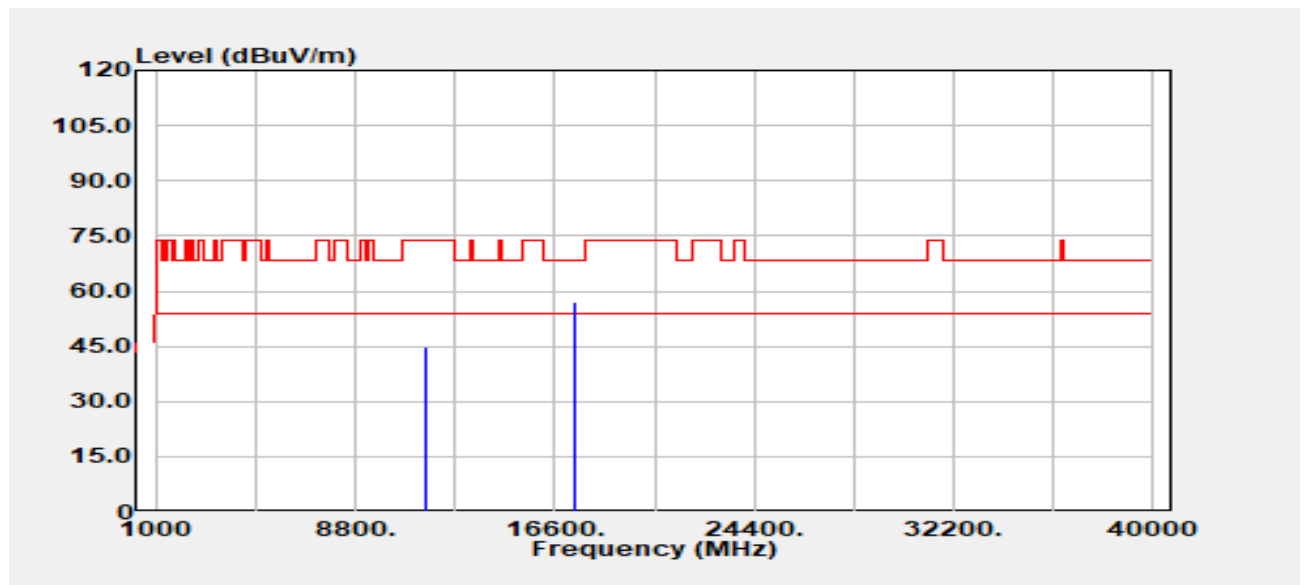


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.000	Peak	32.42	12.48	44.90	74.00	-29.10
11590.000	Average	23.91	12.48	36.38	54.00	-17.62
17385.000	Peak	31.74	25.27	57.01	68.20	-11.19

Report No.: TMWK2308002691KR

Page 390 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray.Li
Test Chamber : 966A

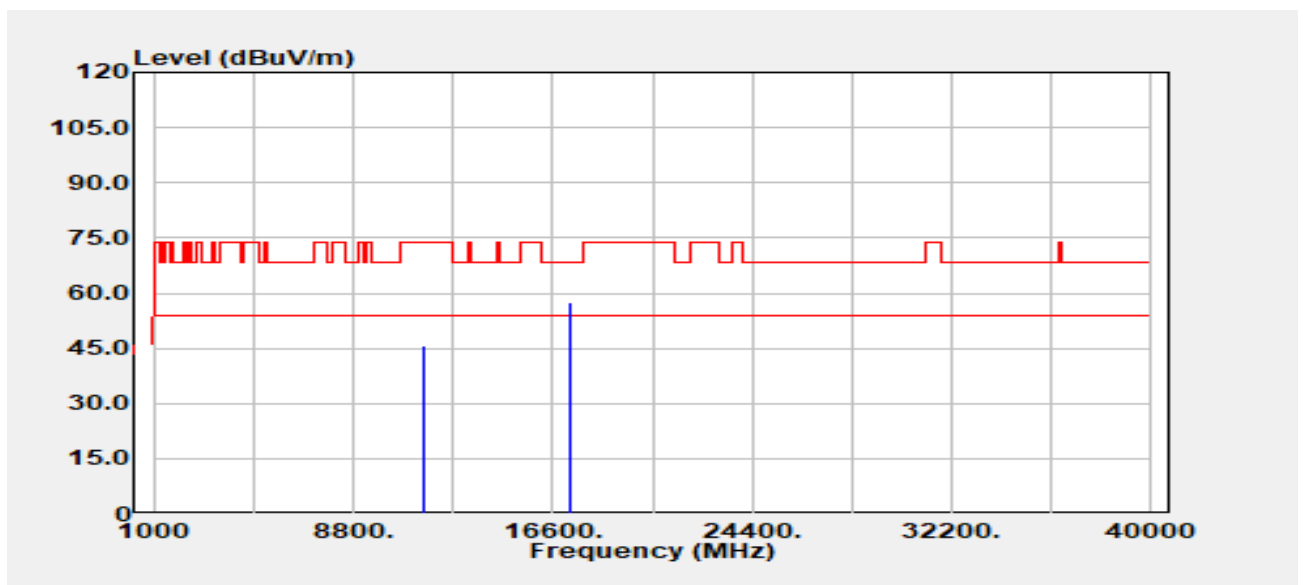


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11550.000	Peak	33.42	12.51	45.92	74.00	-28.08
11550.000	Average	24.39	12.51	36.89	54.00	-17.11
17325.000	Peak	31.92	25.79	57.71	68.20	-10.49

Report No.: TMWK2308002691KR

Page 391 / 391
Rev.: 00

Project Number :TM-2308000057P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2023-09-01
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray.Li
Test Chamber : 966A

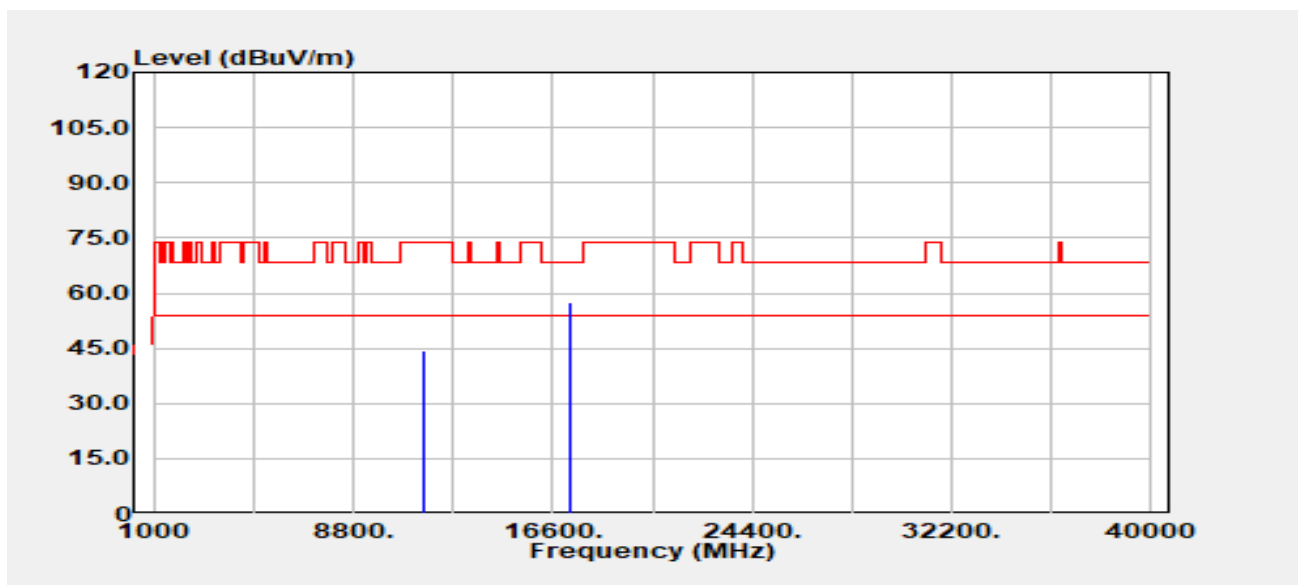

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11550.000	Peak	31.92	12.51	44.43	74.00	-29.57
11550.000	Average	24.33	12.51	36.84	54.00	-17.16
17325.000	Peak	31.90	25.79	57.69	68.20	-10.51

- End of Test Report -