

LBWA0ZZ2HK User Manual for FCC

Model Name: **LBWA0ZZ2HK**

FCC ID: **VPYLBWA0ZZ2HK**

For the details about this module, please refer to the specification sheet of module.

This module should be installed in the host device according to the interface specification (installation procedure)

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the end user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as shown in User manual.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC CAUTION Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This device complies with below part 15 of the FCC Rules.
Part 15 Subpart C

Since there is no space which indicates FCC ID on this module, FCC ID is indicated in a manual. If the module is installed inside another device, then the device must also display a label referring to the enclosed module.
For example : [Contains FCC ID : VPYLBWA0ZZ2HK] or [Contains Transmitter Module FCC ID : VPYLBWA0ZZ2HK]

LBWA0ZZ2HK User Manual for FCC

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

This module designed for mounting inside of the end product.
Therefore, it complies with the antenna and transmission system requirements of §15.203.

This manual is based on KDB 996369, which is designed to ensure that module manufacturer correctly communication the necessary information to host manufacturers that incorporate their modules.

INTEGRATION INSTRUCTIONS

1. General: Applicable

Sections 2 through 12 describe the items that must be provided in the integration instructions for host product manufacturers (e.g., OEM instruction manual) to use when integrating a module in a host product. This Modular transmitter applicant(muRata) should include information in their instructions for all these items indicating clearly when they are not applicable.

2. List of applicable FCC rules: Applicable

This device complies with below part 15 of FCC Rules. Part 15 Subpart C
--

3. Summarize the specific operational use conditions : Applicable

This module designed for mounting inside of the end product by OEM.

Antenna, antenna cable and antenna connectors of this module should be installed inside the end product so end users Cannot change these setting.

Other than supported frequencies of the attached antenna should be controlled not to be transmitted by the host software.

This module is a dedicated module for OEM customers and must not be sold to the general public.

Therefore, it complies with the antenna and transmission system requirements of § 15.203.

4. Limited module procedures : Applicable

This module needs to supply a regulated voltage from host device.

Since there is no space which indicates FCC ID on this module, FCC ID is indicated in a manual. If the module is installed inside another device, then the device must also display a label referring to the enclosed module.

For example : [Contains FCC ID : VPYLBWA0ZZ2HK] or [Contains Transmitter Module FCC ID : VPYLBWA0ZZ2HK]

5. Trace antenna designs : Applicable

Please perform the Trace antenna design that followed the specifications of the antenna.

The concrete contents of a check are the following three points.

- 1) It is the same type as the antenna type of antenna specifications.
Confirm the same size as the Gerber file.
- 2) An antenna gain is lower than a gain given in antenna specifications.
Measure the gain, and confirm the peak gain is less than the application value.
- 3) The emission level is not getting worse.
Measure the spurious, and confirm degradation of less than 3dB than spurious value of worst of report used for the application. Please send those reports to Murata.

6. RF exposure considerations : Applicable

This equipment is only authorized for use in devices that are used at a distance of at least 20 centimeters between the RF source's radiating structure(s) and the body of the user or nearby persons.

When installing it in a portable equipment, it is necessary to take a SAR test with your set mounting this module. Class II permissive change application is necessary using the SAR report. Please contact Murata. And an application for a Class II permissive change from a Mobile equipment to a Portable equipment is also required.

Note)

Portable equipment : Equipment for which the spaces between human body and antenna are used within 20cm.

Mobile equipment : Equipment used at position in which the spaces between human body and antenna exceeded 20cm.

LBWA0ZZ2HK User Manual for FCC

7. Antennas : Applicable

Part number	Vendor	Peak Gain(dBi)	Type	Connector
		902-928MHz		
TA-45B	Unictron	1.1	dipole	RSMA/Pole
TA-26B-A-S01	Unictron	3.75	dipole	RSMA/Pole
H2BESL1S2C0100	Unictron	2.9	dipole	RSMA/Pole
TI.93.A151	Taoglas	2.06	monopole	RSMA/Pole
TI.92.2153	Taoglas	2.14	dipole	RSMA/Pole
TI.19.2153	Taoglas	2.5	dipole	RSMA/Pole
TI.09.A.0151	Taoglas	2.17	dipole	RSMA/Pole
TI.08.C.0151	Taoglas	1.67	dipole	RSMA/Pole
TI.08.C.0152	Taoglas	1.7	monopole	RSMA/Pole
TLS.90.205151	Taoglas	2.46	monopole	RSMA/Pole
X9000984-4GDRMB	KAVX	2.2	dipole	RSMA/Pole
X9000984-4GDRMW	KAVX	2.2	dipole	RSMA/Pole
ANT-915-IPW1-RPS	TE	2.7	dipole	RSMA/Pole
L001102-01	TE	2.1	monopole	RSMA/Pole
AECB1102XS-0100B	ABRACON	1.65	monopole	RSMA/Pole
SREL036-IPR	antenova	2.46	dipole	RSMA/Pole

8. Label and compliance information : Applicable

The following statements must be described on the user manual of the host device of this module;

Contains Transmitter Module FCC ID: VPYLBWA0ZZ2HK

or

Contains FCC ID: VPYLBWA0ZZ2HK

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

*If it is difficult to describe this statement on the host product due to the size, please describe in the User's manual.

FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Frequency Tolerance: ± 20 ppm

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

LBWA0ZZ2HK User Manual for FCC

When installing it in a mobile equipment. Please describe the following warning to the manual.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines. This equipment should be installed and operated keeping the radiator at least 20cm or more away from person's body.

This module is only approval as a mobile equipment.

Therefore, do not install it on portable equipment.

If you wish to use it as a portable equipment, please contact Murata in advance as Class II application accompanied by SAR testing using the final product are required.

Note)

Portable equipment : Equipment for which the spaces between human body and antenna are used within 20cm.

Mobile equipment : Equipment used at position in which the spaces between human body and antenna exceeded 20cm.

9. Information on test modes and additional testing requirements: Applicable

Please check the installation manual first.

Please contact Murata if you have any questions when conducting the RF certification test on the host.

We (Murata) are ready to present the control manual and others for the RF certification test.

10. Additional testing, Part 15 Subpart B disclaimer : Applicable

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

LBWA0ZZ2HK User Manual for FCC

If the final product with this module is FCC Class A digital device, include the following in the manual of the final product:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

If the final product with this module is FCC Class B digital device, include the following in the manual of the final product:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

11. Note EMI Considerations : Applicable

Note that a host manufacture is recommended to use KDB 996369 D04 Module Integration Guide recommending as "best practice" RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties.

For standalone mode, reference the guidance in D04 Module Integration Guide and for simultaneous mode⁷; see D02 Module Q&A Question 12, which permits the host manufacturer to confirm compliance.

12. How to make changes: Applicable

When changing from the conditions of approval, please present technical documentation that it is equivalent to a Class I change. For example, when adding or changing an antenna, the following technical documents are required.

- 1)The document indicating the same type as the original antenna
- 2)Technical document showing that the gain is the same or lower than the gain at the time of the original approval
- 3)Technical document showing that the spurious is no more than 3 dB worse than when it was originally certified

About Power supply(Limited condition)

This Module(LBWA0ZZ2HK) have been approved as Limited Modular Approval.
These modules do not have a voltage stabilizing circuit in the power path to the internal RF circuitry.
Therefore, the Limited Condition must provide a stable power supply for the supply voltage to the module.

Please supply a stable power supply so that the voltage shown in the table below is applied.

Parameter		Min.	Typ.	Max.	unit
Supply Voltage	VBAT	3.14	3.3	3.46	V
	VIO	1.68	1.8	3.60	V

Trace antenna and feed line

■ About the signal line between an antenna and a module

It is a 50-ohm line design.

Fine tuning of return loss etc. can be performed using a matching network.

However, it is required to check "Class1 change" and "Class2 change" which the authorities define then.

The concrete contents of a check are the following three points.


- 1) It is the same type as the antenna type of antenna specifications.
- 2) An antenna gain is lower than a gain given in antenna specifications.
- 3) The emission level is not getting worse.

The following is the design of the EVB used for the test.

LBWA0ZZ2HK User Manual for FCC

50-ohm line(microstrip line length)

Certification tests are conducted in the following patterns.

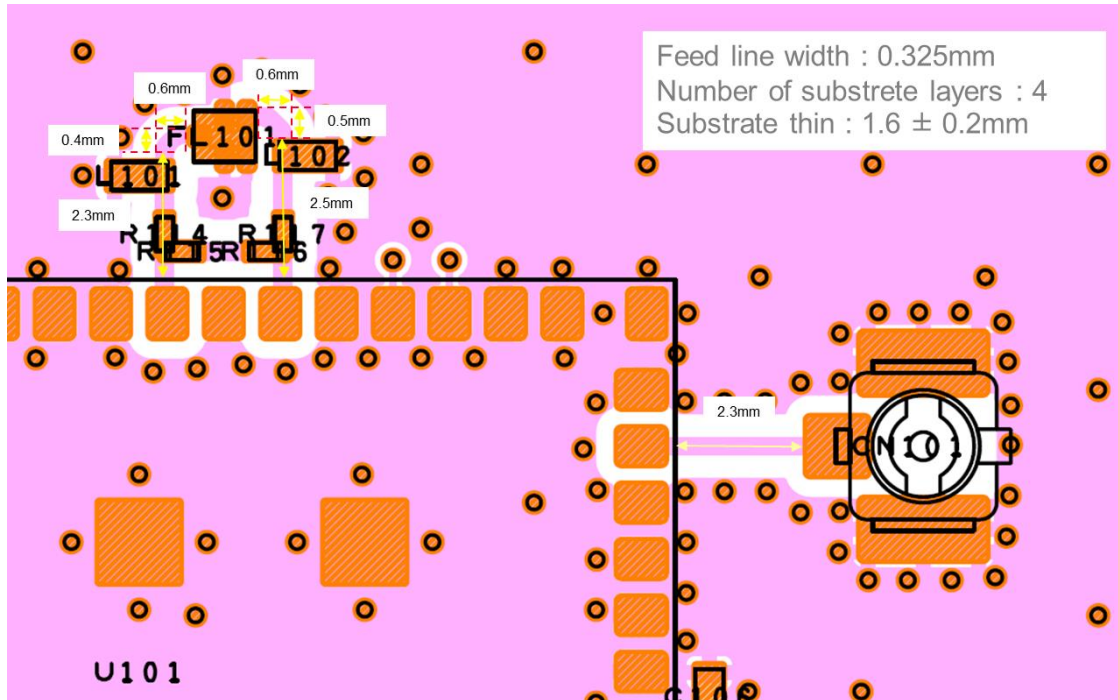


The 50ohm microstrip line needs to be copied when module is installed in the End product.

Murata provides set makers with Gerber data or something similar.

LBWA0ZZ2HK User Manual for FCC

The Layer2 ground plane provides a return path for the circuit.

The Dielectric material (along with the dimensions of the microstrip structures) determines the characteristic impedance of the microstrip transmission line.

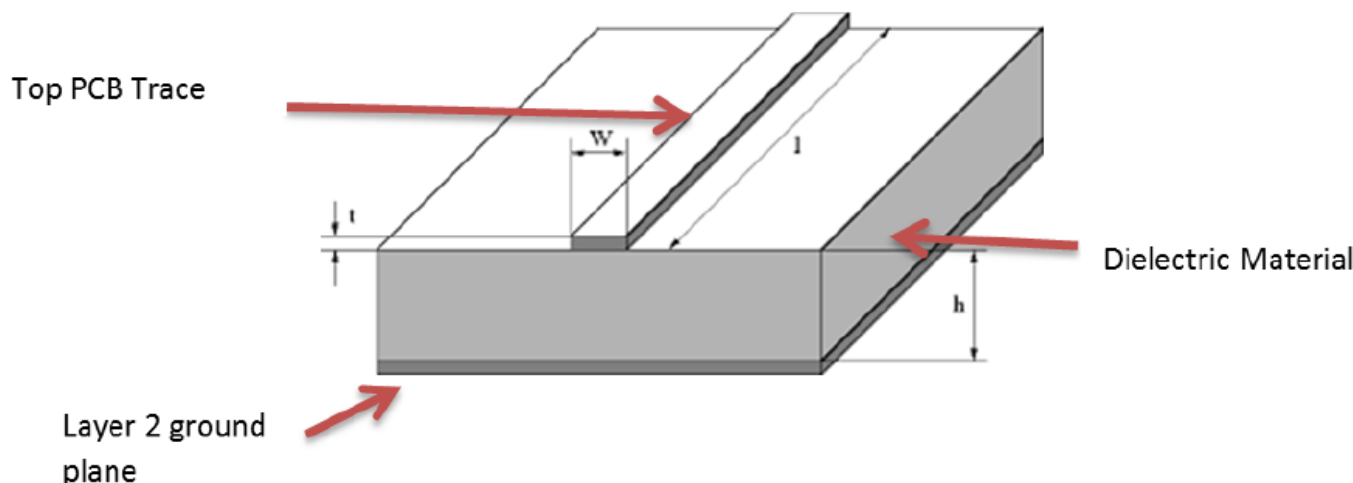

Note the representative dimensions shown in the drawing above.

It is imperative that the module customer (the integrator) use the exact dimensions we recommend to ensure a 50-ohm impedance for this transmission line.

The following dimensions and/or ratios should be used to set the microstrip impedance to 50ohms.

Dielectric (PCB) Material — We recommend standard FR4 PCB material. Other dielectrics will work but will require recalculation of microstrip dimensions. The following guidance is predicated on the use of FR4 Dielectric.

If FR4 is not used for PCB material, please contact Murata to determine new dimensions for microstrip structure.

H (Dielectric Height) — this is the thickness of dielectric between the trace layer (layer 1) and the ground plane on layer 2.

Note that layer 2 must be electrical ground. We recommend a dielectric thickness of 8-15 mils.

This range provides the customer with some flexibility in board construction.

t (trace thickness) — Microstrip impedance is not severely affected by the thickness dimension.

Standard 102 or 202 copper deposition is recommended. Equivalent thickness is 1-2 mils.

W (trace width) — this is the crucial dimension. This width must be set correctly to obtain the desired 50 ohms impedance.

When using FR-4 dielectric, the width (W) of the microstrip trace should be set to:

$$W = H * 1.8$$

LBWA0ZZ2HK User Manual for FCC

Where W is microstrip trace width and H is Dielectric height. Note that both values must be measured in identical units (mils or mm)

Example:

H = 12 mils, $W = 12 * 1.8 = 21.6$ mils

H = 0.4 mm $W = 0.4 * 1.8 = 0.72$ mm

I (trace length) - the impedance of the microstrip line is not dependent on its length.

However, regulatory and performance limitations practically determine the actual length to be used by the customer (integrator).

The length of this microstrip line must be longer than 7 mm to mimic the length used during FCC/ISED certification of the LBES0ZZ2LL module.

Lengths longer than 7 mm are acceptable although additional signal loss will occur as a result.

Given these restrictions, Murata recommends microstrip trace lengths between 7 mm and 25 mm.

In any event, the microstrip line must operate over the same Dielectric-Ground Plane configuration shown above to act as a 50ohm transmission line.

Do not run the microstrip trace through sections of PCB that do not have the Dielectric-Ground plane configuration shown above.

A reliable 50-ohm transmission line will be produced if the above guidance is closely followed.

Any deviations from the guidance above may cause the module to operate in noncompliant manner.

Any implementation questions or concerns should be directed to Murata module technical support.

About Software SECURITY

Updates must be systematized to be deployed by your device management system to qualify for this approval.

A condition for using this authorization is that the update package is systematized, managed by digital signatures, individual identification numbers, etc.

Inform our company that we have designed the FW and configuration files specified by Murata to be installed correctly when you are implemented in the final product.