



---

## TEST REPORT

---

Report No.: SRTC2014-H024-E0041

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Product Model: Philips S388

Applicant: Shenzhen Sang Fei Consumer Communications  
Co., Ltd.

Manufacturer: Shenzhen Sang Fei Consumer Communications  
Co., Ltd.

Specification: FCC Part 24E, Part 22H, Part 2  
(October 1, 2013 edition)

FCC ID: VQRCTS388

The State Radio\_monitoring\_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

## CONTENTS

|                                                                            |    |
|----------------------------------------------------------------------------|----|
| 1. General information .....                                               | 3  |
| 1.1 Notes of the test report .....                                         | 3  |
| 1.2 Information about the testing laboratory .....                         | 3  |
| 1.3 Applicant's details .....                                              | 3  |
| 1.4 Manufacturer's details .....                                           | 3  |
| 1.5 Application details .....                                              | 4  |
| 1.6 Reference specification .....                                          | 4  |
| 1.7 Information of EUT .....                                               | 4  |
| 1.7.1 General information .....                                            | 4  |
| 1.7.2 EUT details .....                                                    | 5  |
| 1.7.3 Auxiliary equipment details .....                                    | 5  |
| 2. Test information .....                                                  | 6  |
| 2.1 Summary of the test results .....                                      | 6  |
| 2.2 Test result .....                                                      | 7  |
| 2.2.1 WCDMA Band II .....                                                  | 7  |
| 2.2.1.1 RF Power Output-FCC Part24.232(b) .....                            | 7  |
| 2.2.1.2 Effective Isotropic Radiated Power-FCC Part24.232(b) .....         | 8  |
| 2.2.1.3 Occupied Bandwidth-FCC Part2.1049 .....                            | 11 |
| 2.2.1.4 Emission Bandwidth-FCC Part24.238(b) .....                         | 15 |
| 2.2.1.5 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238 ..... | 16 |
| 2.2.1.6 Band Edges Compliance-FCC Part24.238(b) .....                      | 20 |
| 2.2.1.7 Frequency Stability-FCC Part2.1055/24.235 .....                    | 23 |
| 2.2.1.8 Radiated Spurious Emissions-FCC Part2.1053/24.238 .....            | 25 |
| 2.2.2 WCDMA Band V .....                                                   | 30 |
| 2.2.2.1 RF Power Output-FCC Part22.913(a) .....                            | 30 |
| 2.2.2.2 Effective Radiated Power-FCC Part22.913(a) .....                   | 31 |
| 2.2.2.3 Occupied Bandwidth-FCC Part2.1049 .....                            | 34 |
| 2.2.2.4 Emission Bandwidth-FCC Part22.917(b) .....                         | 38 |
| 2.2.2.5 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917 ..... | 39 |
| 2.2.2.6 Band Edges Compliance-FCC Part22.917(b) .....                      | 43 |
| 2.2.2.7 Frequency Stability-FCC Part2.1055/22.355 .....                    | 46 |
| 2.2.2.8 Radiated Spurious Emissions-FCC Part2.1053/22.917(a) .....         | 48 |
| 2.3. List of test equipments .....                                         | 53 |
| Appendix .....                                                             | 54 |

## 1. General information

### 1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### 1.2 Information about the testing laboratory

Company: The State Radio\_monitoring\_center Testing Center (SRTC)  
Address: No.80 Beilishi Road, Xicheng District, Beijing China  
City: Beijing  
Country or Region: China  
Contacted person: Wang Junfeng  
Tel: +86 10 68009181 +86 10 68009202  
Fax: +86 10 68009195 +86 10 68009205  
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

### 1.3 Applicant's details

Company: Shenzhen Sang Fei Consumer Communications Co., Ltd.  
Address: 11 Science & Technology Rd., Shenzhen Hi-tech Industrial  
Park, Nanshan District  
City: Shenzhen  
Country or Region: China  
Grantee Code: VQR  
Contacted person: Helen.Lin  
Tel: 86-755-33308888  
Fax: 86-755-26614979  
Email: Helen.Lin@sangfei.com

### 1.4 Manufacturer's details

Company: Shenzhen Sang Fei Consumer Communications Co., Ltd.  
Address: 11 Science & Technology Rd., Shenzhen Hi-tech Industrial  
Park, Nanshan District  
City: Shenzhen  
Country or Region: China  
Contacted person: Helen.Lin  
Tel: 86-755-33308888  
Fax: 86-755-26614979  
Email: Helen.Lin@sangfei.com

## 1.5 Application details

Date of reception of test sample: 1<sup>st</sup> July 2014

Date of test: 2<sup>nd</sup> July 2014 to 22<sup>nd</sup> July 2014

## 1.6 Reference specification

FCC Part 24E, Part22H, Part 2 (October 1, 2013 edition)

## 1.7 Information of EUT

### 1.7.1 General information

|                            |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| Name of EUT                | GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi                                   |
| FCC ID                     | VQRCTS388                                                                                         |
| Frequency Range            | WCDMA Band II:<br>Tx:1850~1910MHz Rx:1930~1990MHz<br>WCDMA Band V:<br>Tx:824~849MHz Rx:869~894MHz |
| Rated Output Power         | WCDMA Band II:24.0dBm<br>WCDMA Band V:24.0dBm                                                     |
| Modulation Type            | QPSK                                                                                              |
| Emission Designator        | 4M50F9W                                                                                           |
| Duplex Mode                | FDD                                                                                               |
| Duplex Spacing             | WCDMA Band II:80MHz<br>WCDMA Band V:45MHz                                                         |
| Antenna Type               | Fixed Internal                                                                                    |
| Power Supply               | Battery or Charger                                                                                |
| Rated Power Supply Voltage | 3.7V                                                                                              |
| Extreme Temperature        | Lowest: -30°C<br>Highest: +50°C                                                                   |
| Extreme Voltage            | Minimum: 3.5V<br>Maximum: 4.2V                                                                    |
| HW Version                 | TMBKa                                                                                             |
| SW Version                 | S388_M6582M_1425_V01A_AM                                                                          |

### 1.7.2 EUT details

| Product Name                                                    | Product Model | IMEI            |
|-----------------------------------------------------------------|---------------|-----------------|
| GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi | Philips S388  | 864359021775387 |

### 1.7.3 Auxiliary equipment details


| Equipment      | Charger                     |
|----------------|-----------------------------|
| Manufacturer   | Salcomp (Shenzhen) Co., Ltd |
| Model Number   | 3208SF                      |
| Input Voltage  | 100V-240V a.c.              |
| Output Voltage | 5.0V d.c.                   |
| Frequency      | 50/60Hz                     |

| Equipment     | Battery                                |
|---------------|----------------------------------------|
| Manufacturer  | Shenzhen cyclelong power-tech Co., ltd |
| Model Number  | AB1700AWML                             |
| Capacity      | 1700mAh                                |
| Rated Voltage | 3.7V d.c.                              |

## 2. Test information

### 2.1 Summary of the test results

| No. | Test case                                                             | FCC reference           | Verdict |
|-----|-----------------------------------------------------------------------|-------------------------|---------|
| 1   | RF Power Output                                                       | 22.913(a)/24.232(b)     | Pass    |
| 2   | Effective Radiated Power<br>and<br>Effective Isotropic Radiated Power | 22.913(a)/24.232(b)     | Pass    |
| 3   | Occupied Bandwidth                                                    | 2.1049                  | Pass    |
| 4   | Emission Bandwidth                                                    | 22.917(b)/24.238(b)     | Pass    |
| 5   | Spurious Emissions at antenna<br>terminal                             | 2.1051/22.917/24.238    | Pass    |
| 6   | Band Edges Compliance                                                 | 22.917(b)/24.238(b)     | Pass    |
| 7   | Frequency Stability                                                   | 2.1055/22.355/24.235    | Pass    |
| 8   | Radiated Spurious Emissions                                           | 2.1053/22.917(a)/24.238 | Pass    |

|                                                                                                                                                                           |                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>This Test Report Is Issued by:<br/>Mr. Song Qizhu<br/>Director of the test lab</p>  | <p>Checked by:<br/>Mr. Wang Junfeng<br/>Deputy director of the test lab</p>  |
| <p>Tested by:<br/>Mr. Li Bin<br/>Test engineer</p>                                     | <p>Issued date:</p> <p><b>2014.07.23</b></p>                                                                                                                      |

## 2.2 Test result


### 2.2.1 WCDMA Band II

#### 2.2.1.1 RF Power Output-FCC Part24.232(b)

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 19.3°C      | 41.3%             | 100.7kPa |

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)

| Limits | $\leq 24\text{dBm}$ |
|--------|---------------------|
|--------|---------------------|

Test result:

WCDMA Mode:

| Carrier frequency (MHz) | Channel No. | RF Power Output (dBm) |
|-------------------------|-------------|-----------------------|
| 1852.4                  | 9262        | 21.05                 |
| 1880.0                  | 9400        | 21.35                 |
| 1907.6                  | 9538        | 21.67                 |

HSDPA/HSUPA Mode:


| Carrier frequency (MHz) | Channel No. | RF Power Output (dBm) |
|-------------------------|-------------|-----------------------|
| 1852.4                  | 9262        | 18.50                 |
| 1880.0                  | 9400        | 18.60                 |
| 1907.6                  | 9538        | 18.80                 |

## 2.2.1.2 Effective Isotropic Radiated Power-FCC Part24.232(b)


Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C        | 43%               | 99.7kPa  |

Test setup:

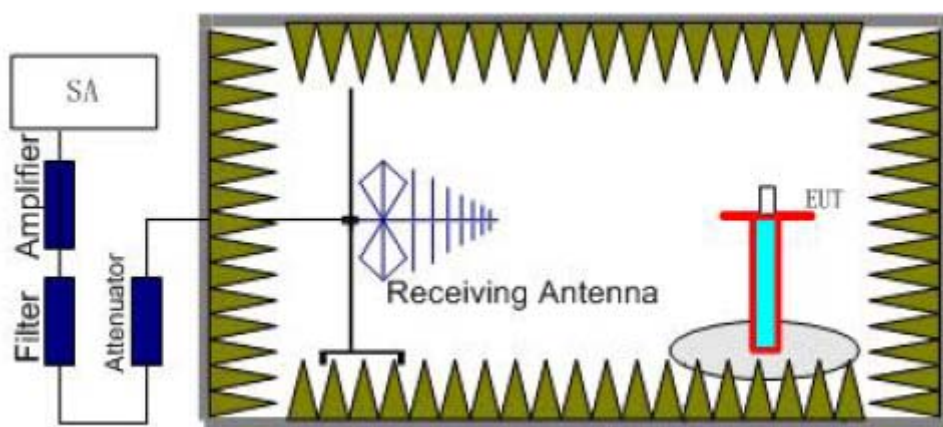

Step 1

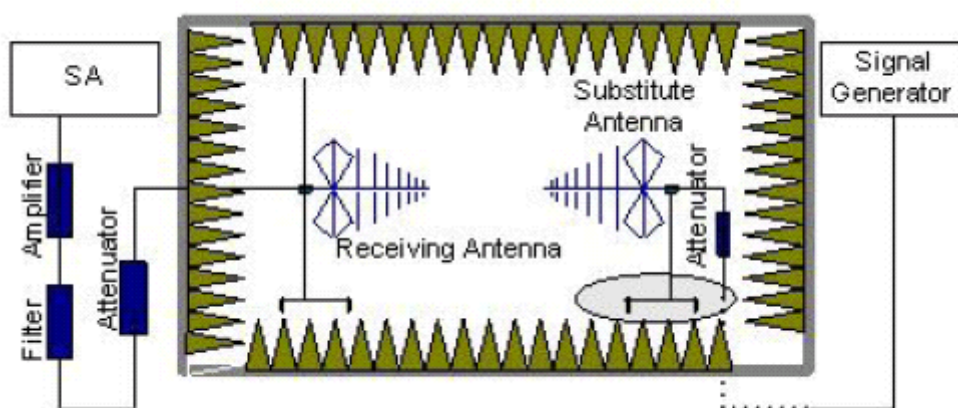

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3

meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P<sub>mea</sub>) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P<sub>mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P<sub>ca</sub>) and the Substitution Antenna Gain (G<sub>a</sub>).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_{\text{a}}$$

The measurement will be done at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II).

|        |        |
|--------|--------|
| Limits | ≤33dBm |
|--------|--------|

Test result:

WCMDA Mode:

| Frequency (MHz) | Peak EIRP(dBm) | Pca Cable loss | Ga Antenna Gain (dB) | Pmea (dBm) | Polarization |
|-----------------|----------------|----------------|----------------------|------------|--------------|
| 1852.6          | 22.9           | -5.0           | 8.6                  | 19.3       | Vertical     |
| 1880.0          | 22.5           | -5.0           | 8.6                  | 18.9       | Vertical     |
| 1907.4          | 22.6           | -5.0           | 8.6                  | 19.0       | Vertical     |

HSDPA/HSUPA Mode:

| Frequency (MHz) | Peak EIRP(dBm) | Pca Cable loss | Ga Antenna Gain (dB) | Pmea (dBm) | Polarization |
|-----------------|----------------|----------------|----------------------|------------|--------------|
| 1852.6          | 18.8           | -5.0           | 8.6                  | 15.2       | Vertical     |
| 1880.0          | 19.2           | -5.0           | 8.6                  | 15.6       | Vertical     |
| 1907.4          | 18.4           | -5.0           | 8.6                  | 14.8       | Vertical     |

Frequency: 1852.6MHz


Peak ERP(dBm) = Pmea(19.3dBm)+Pca(-5.0dB)+Ga(8.6dB) = 22.9dBm

### 2.2.1.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test Setup:

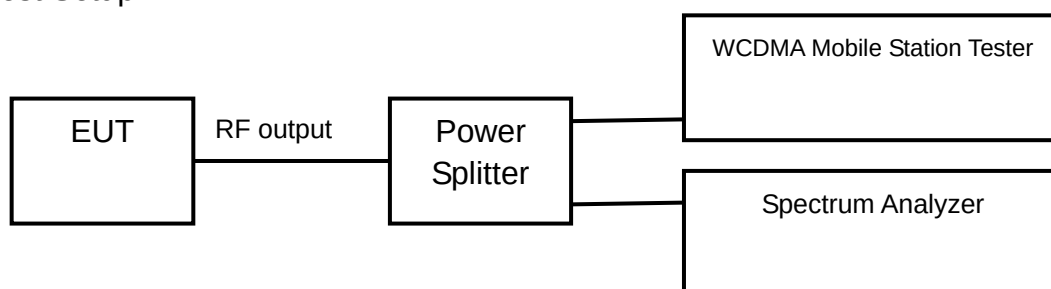

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


WCDMA Mode:

| Carrier frequency (MHz) | Channel No. | Bandwidth of 99% Power (MHz) |
|-------------------------|-------------|------------------------------|
| 1852.4                  | 9262        | 4.1686                       |
| 1880.0                  | 9400        | 4.1609                       |
| 1907.6                  | 9538        | 4.1803                       |


HSDPA/HSUPA Mode:

| Carrier frequency (MHz) | Channel No. | Bandwidth of 99% Power (MHz) |
|-------------------------|-------------|------------------------------|
| 1852.4                  | 9262        | 4.1754                       |
| 1880.0                  | 9400        | 4.1704                       |
| 1907.6                  | 9538        | 4.1486                       |


WCDMA Mode:

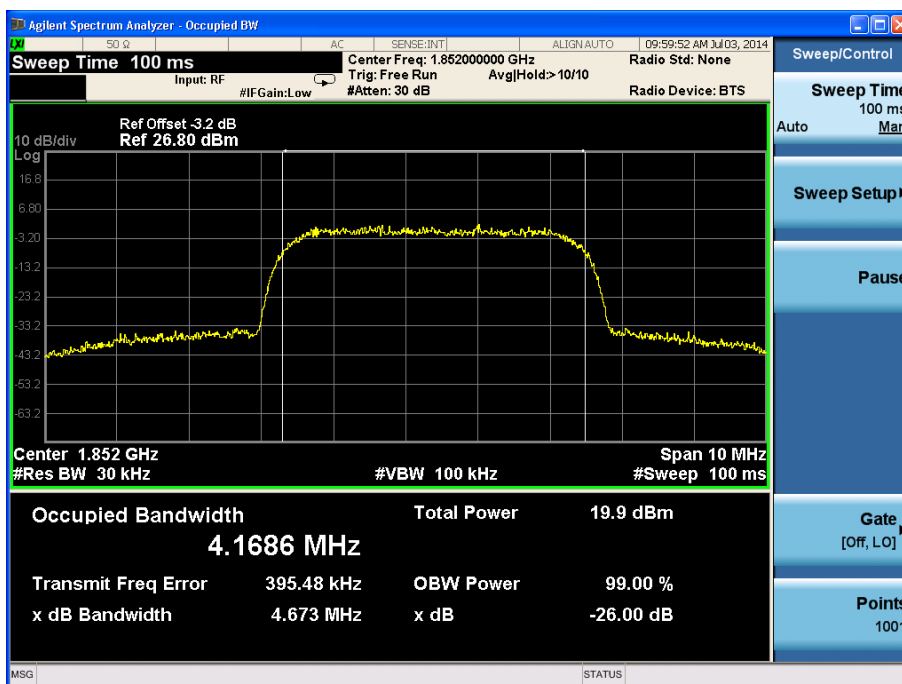

Channel 9262

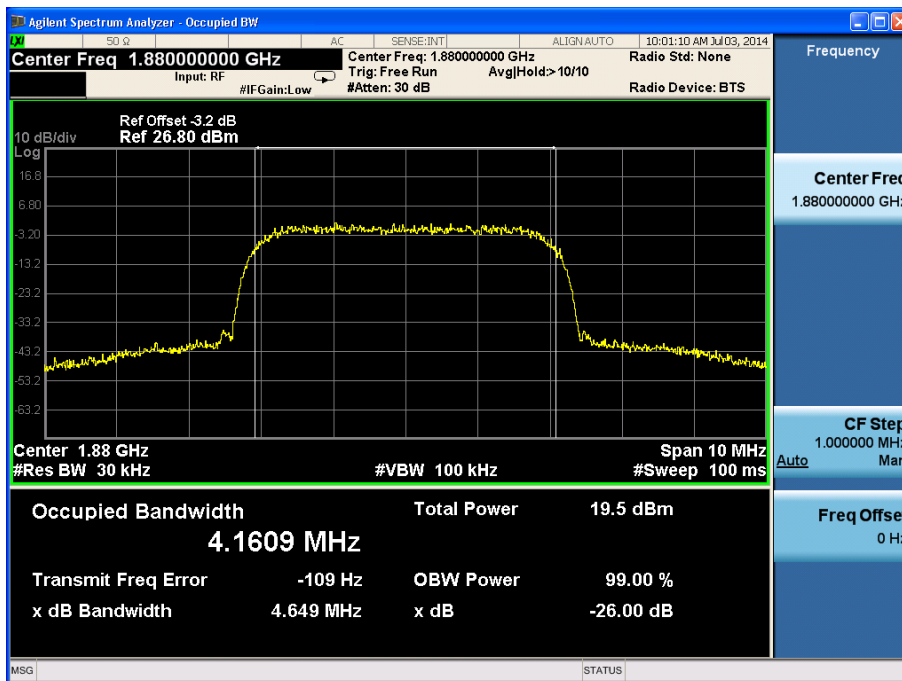


Channel 9400

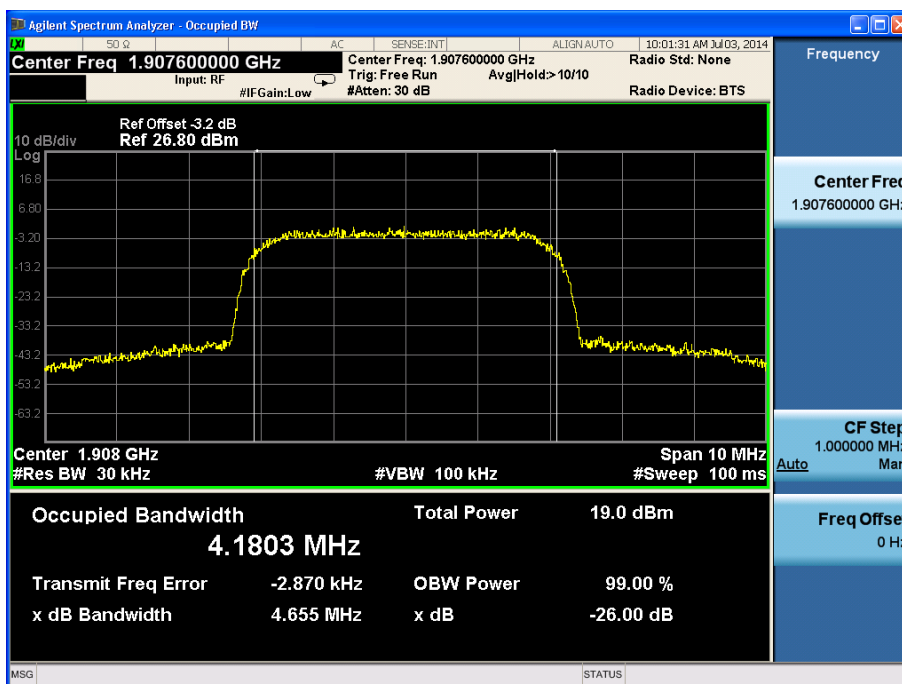


Channel 9538


HSDPA/HSUPA Mode:

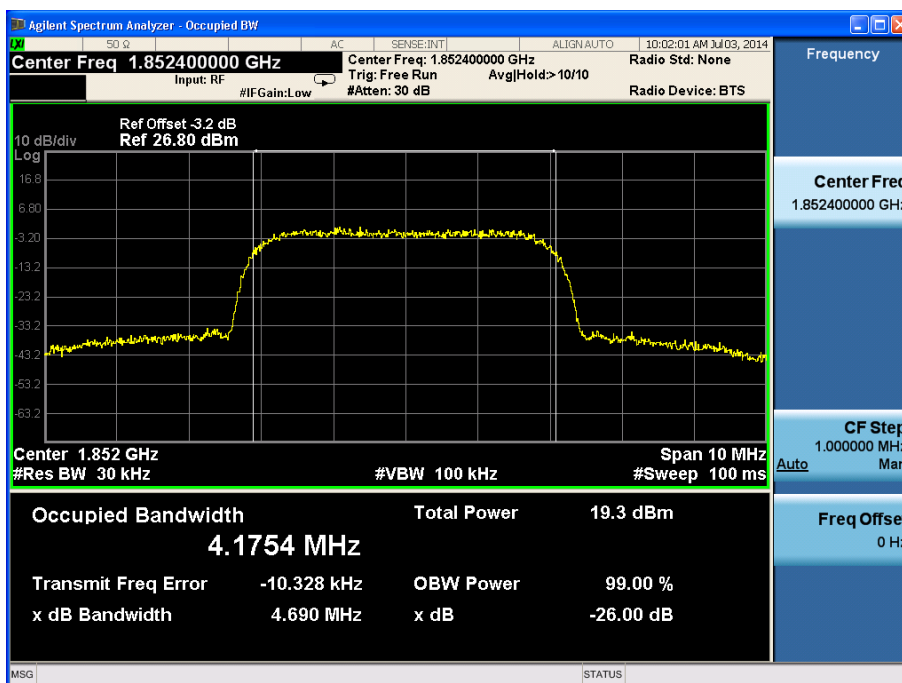

Channel 9262

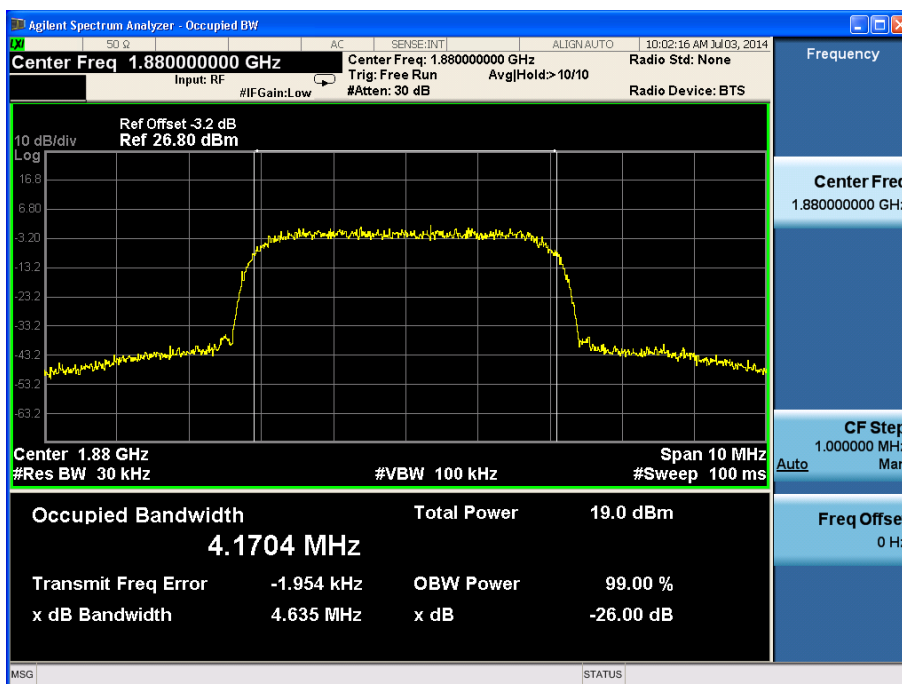

Channel 9400

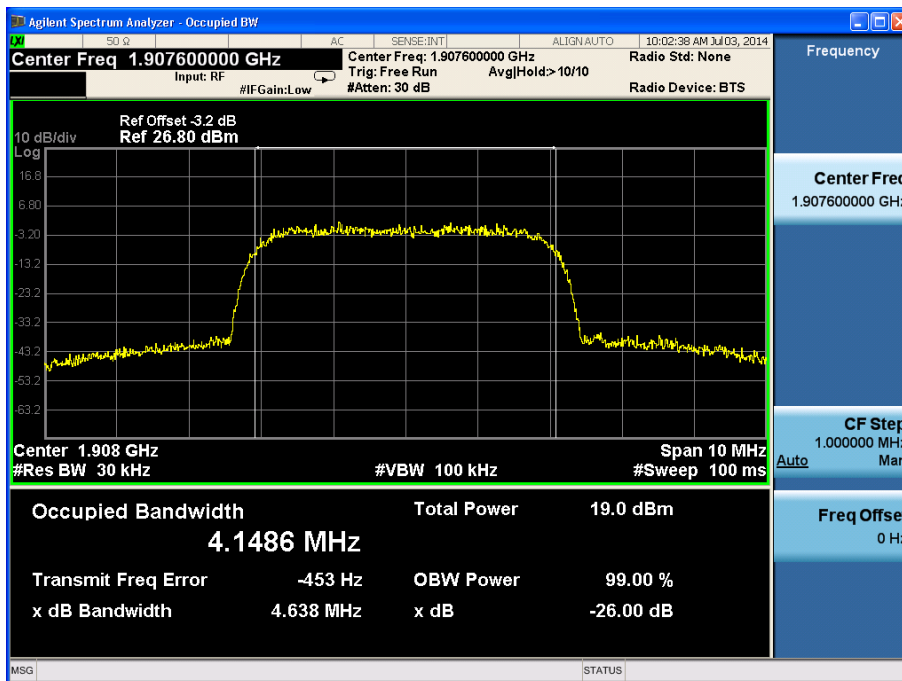


Channel 9538

## 2.2.1.4 Emission Bandwidth-FCC Part24.238(b)

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test Setup:

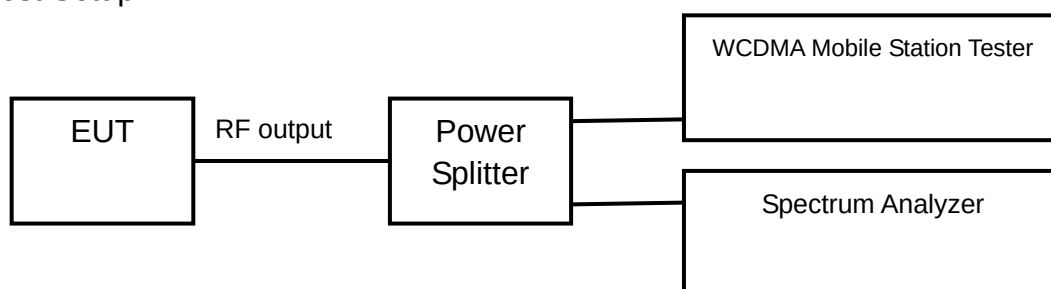

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of -26dBc power can be read on spectrum analyzer.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)

Limits: No specific emission bandwidth requirements in part 24.238(b)

Test result:

WCDMA Mode:

| Carrier frequency (MHz) | Channel No. | Bandwidth of -26dBc Power (MHz) |
|-------------------------|-------------|---------------------------------|
| 1852.4                  | 9262        | 4.673                           |
| 1880.0                  | 9400        | 4.649                           |
| 1907.6                  | 9538        | 4.655                           |

HSDPA/HSUPA Mode:


| Carrier frequency (MHz) | Channel No. | Bandwidth of -26dBc Power (MHz) |
|-------------------------|-------------|---------------------------------|
| 1852.4                  | 9262        | 4.690                           |
| 1880.0                  | 9400        | 4.635                           |
| 1907.6                  | 9538        | 4.638                           |

## 2.2.1.5 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test Setup:

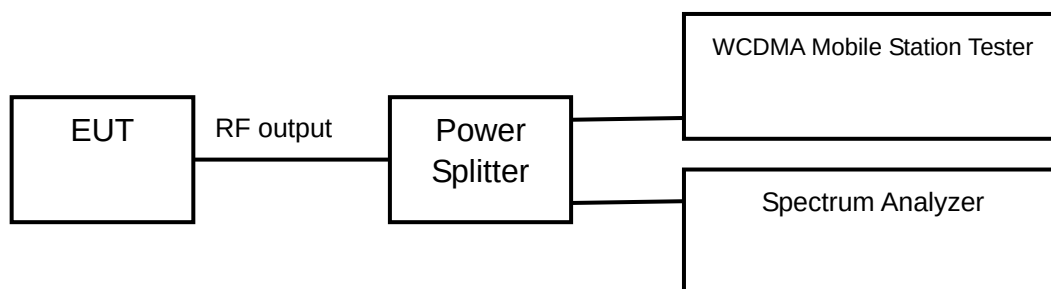

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No9400 (middle channel of WCDMA band II)

|        |                      |
|--------|----------------------|
| Limits | $\leq -13\text{dBm}$ |
|--------|----------------------|


Test result:

Refer to the following figures.

WCDMA Mode:

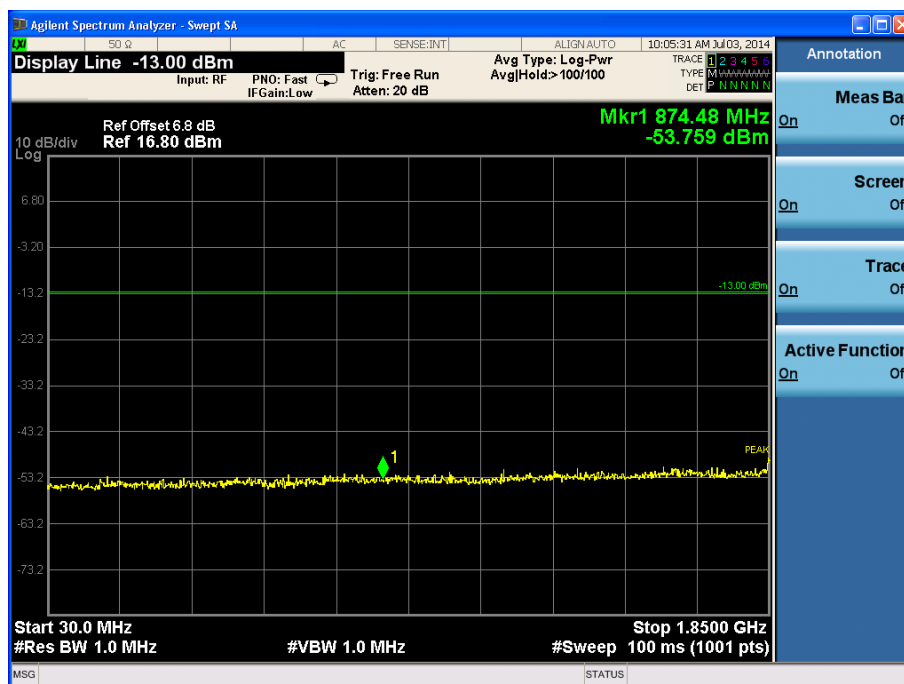

Channel 9400, 30MHz~1850MHz

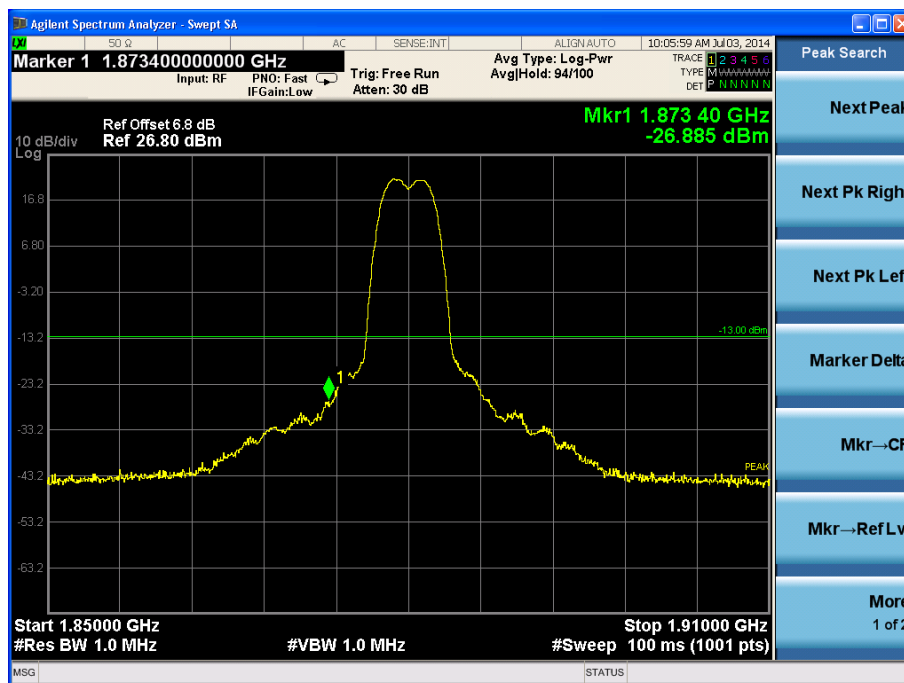


Channel 9400, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.




Channel 9400, 1910MHz~20GHz

HSDPA/HSUPA Mode:

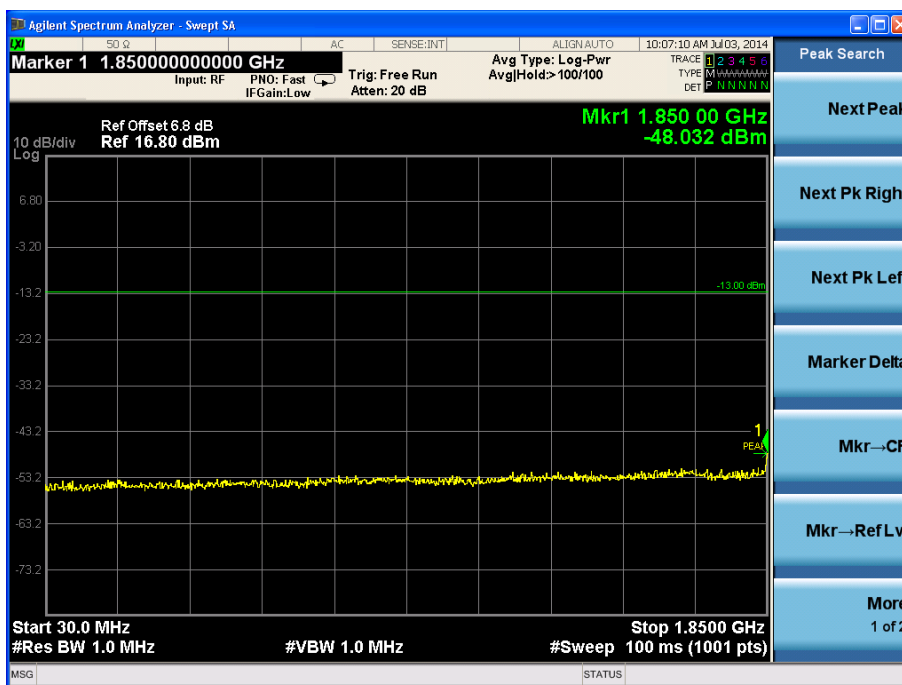

Channel 9400, 30MHz~1850MHz

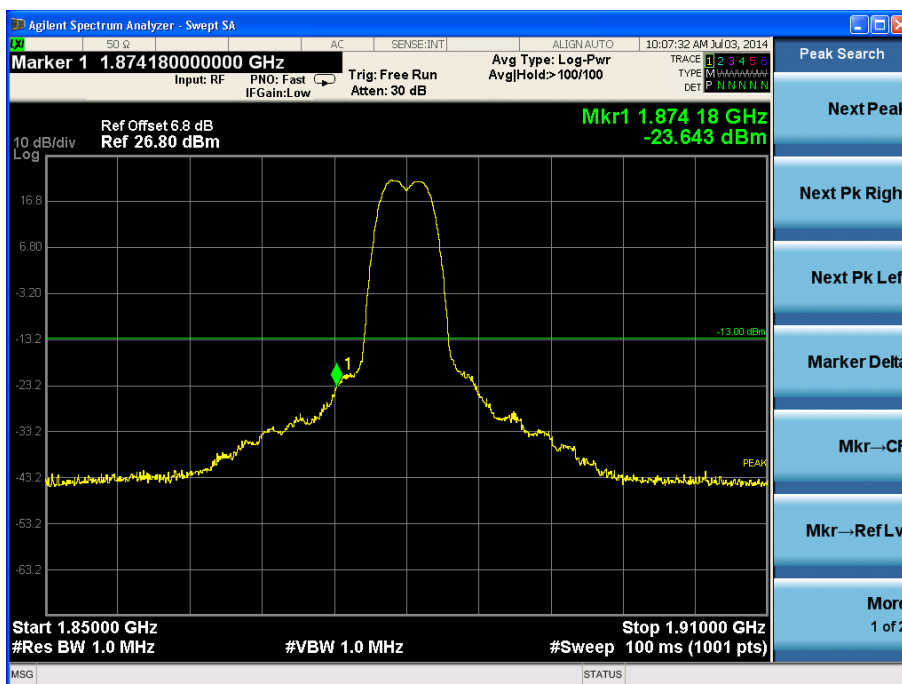

Channel 9400, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.




Channel 9400, 1910MHz~20GHz

## 2.2.1.6 Band Edges Compliance-FCC Part24.238(b)

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test Setup:

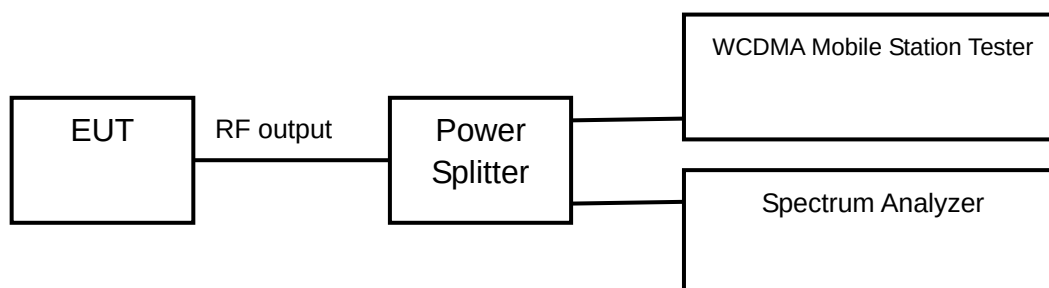

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No9262 and No9538 (Bottom and top channels of WCDMA band II)

|        |                      |
|--------|----------------------|
| Limits | $\leq -13\text{dBm}$ |
|--------|----------------------|


Test result:

Refer to the following figures.

WCDMA Mode:

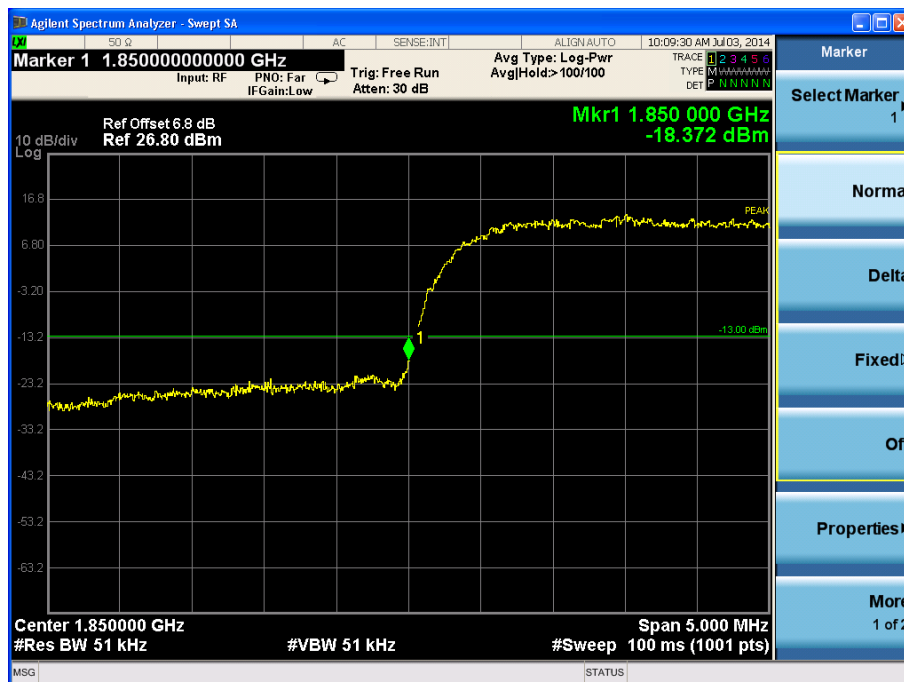


Channel 9262

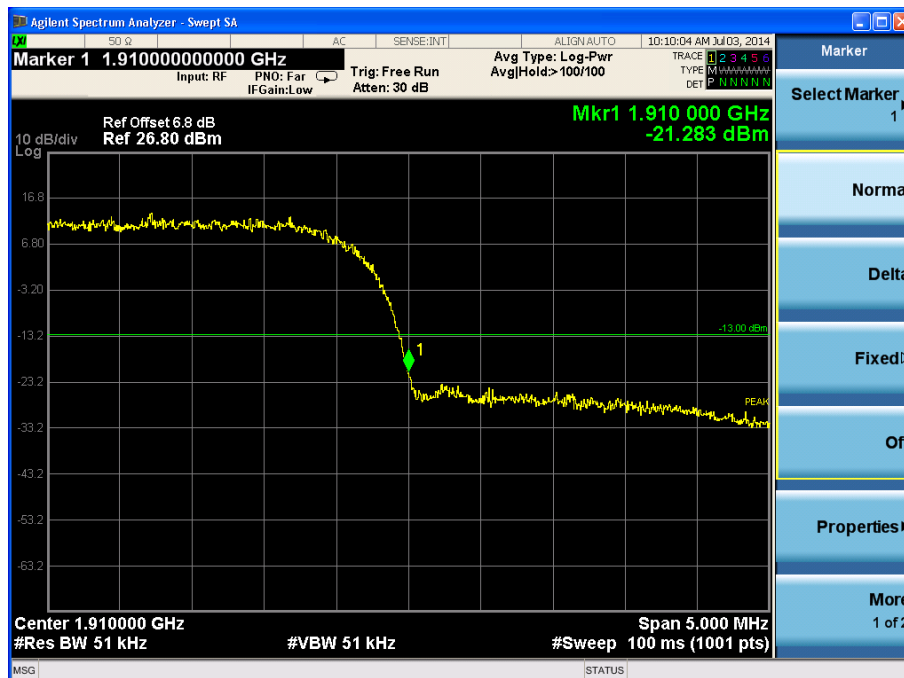


Channel 9538

HSDPA/HSUPA Mode:

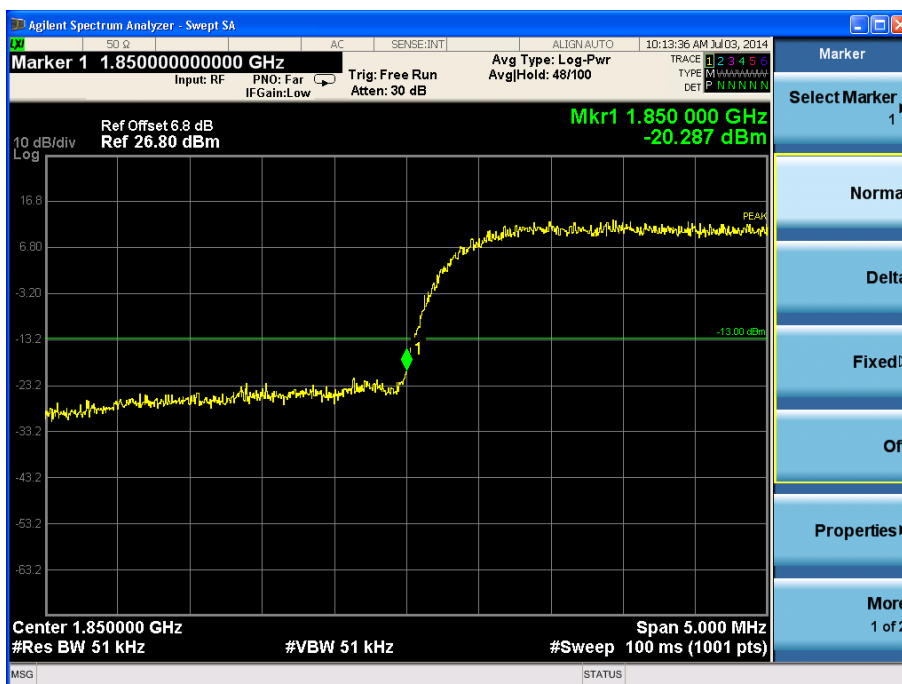

Channel 9262

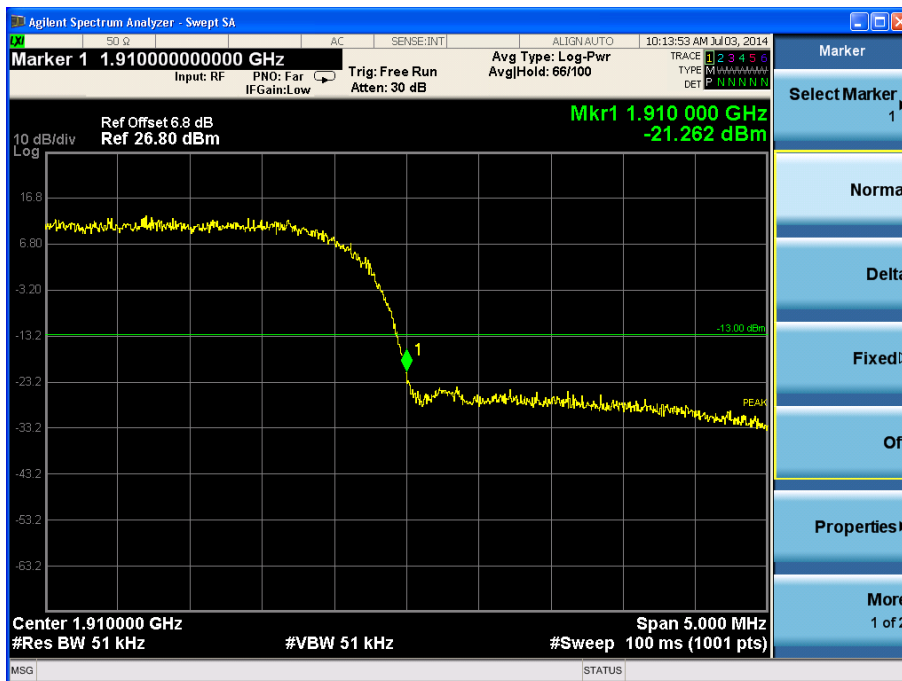


Channel 9538

### 2.2.1.7 Frequency Stability-FCC Part2.1055/24.235

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test setup:

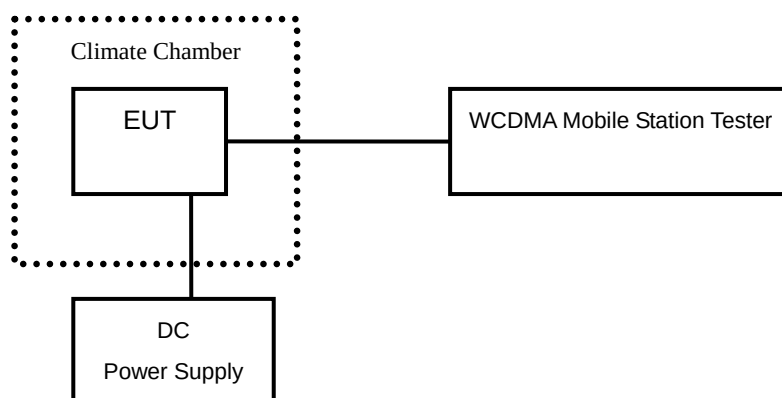

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.2V. The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II).

Limits: No specific frequency stability requirements in part 2.1055 and part 24.235.

Test result:

WCDMA Mode:

| Temperature(°C) | Test Result (ppm)@3.7V |              |              |
|-----------------|------------------------|--------------|--------------|
|                 | Channel 9262           | Channel 9400 | Channel 9538 |
| -30             | 0.011                  | 0.010        | 0.011        |
| -20             | 0.012                  | 0.011        | 0.010        |
| -10             | 0.011                  | 0.012        | 0.012        |
| 0               | 0.010                  | 0.011        | 0.009        |
| +10             | 0.011                  | 0.010        | 0.011        |
| +20             | 0.012                  | 0.011        | 0.010        |
| +30             | 0.010                  | 0.012        | 0.011        |
| +40             | 0.012                  | 0.011        | 0.012        |
| +50             | 0.010                  | 0.010        | 0.012        |

| Voltage (V) | Test Result (ppm)@20°C |              |              |
|-------------|------------------------|--------------|--------------|
|             | Channel 9262           | Channel 9400 | Channel 9538 |
| 3.5         | 0.012                  | 0.011        | 0.010        |
| 4.2         | 0.010                  | 0.012        | 0.011        |

HSDPA/HSUPA Mode:

| Temperature(°C) | Test Result (ppm)@3.7V |              |              |
|-----------------|------------------------|--------------|--------------|
|                 | Channel 9262           | Channel 9400 | Channel 9538 |
| -30             | 0.011                  | 0.010        | 0.011        |
| -20             | 0.012                  | 0.011        | 0.010        |
| -10             | 0.013                  | 0.009        | 0.012        |
| 0               | 0.012                  | 0.011        | 0.010        |
| +10             | 0.010                  | 0.012        | 0.011        |
| +20             | 0.012                  | 0.011        | 0.012        |
| +30             | 0.011                  | 0.013        | 0.013        |
| +40             | 0.012                  | 0.011        | 0.012        |
| +50             | 0.011                  | 0.011        | 0.011        |


| Voltage (V) | Test Result (ppm)@20°C |              |              |
|-------------|------------------------|--------------|--------------|
|             | Channel 9262           | Channel 9400 | Channel 9538 |
| 3.5         | 0.011                  | 0.012        | 0.011        |
| 4.2         | 0.012                  | 0.011        | 0.013        |

## 2.2.1.8 Radiated Spurious Emissions-FCC Part2.1053/24.238


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 19.3°C      | 41.3%             | 100.7kPa |

Test Setup:

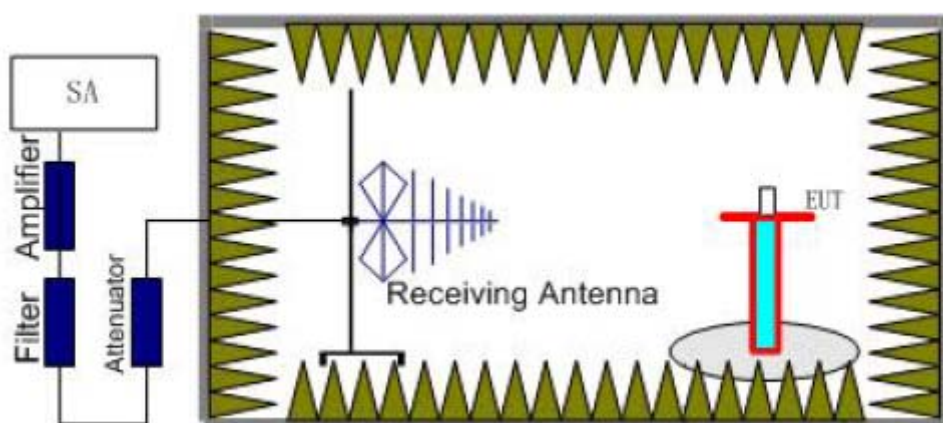

Step 1

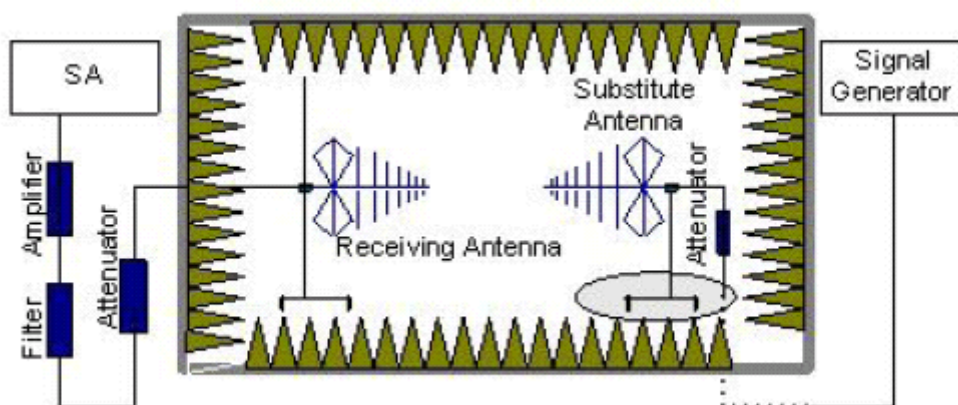

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed

on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver. A power ( $P_{mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna ( $P_{ca}$ ) and the Substitution Antenna Gain ( $G_a$ ).

#### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{ (dB)}$ .

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P=P_{\text{mea}}+P_{\text{ca}}+G_{\text{a}}=(-20\text{dBm})+(-30\text{dB})+(11\text{dB})=-39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 9262), middle (Channel 9400) and top (Channel 9538) channels of WCDMA band II.

Test result:

WCDMA MODE:

Channel 9262

| Frequency (MHz) | Power (dBm) | Pca Cable loss (dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|---------------------|----------------------|------------|---------------|--------------|
| 2451.22         | -44.8       | -5.6                | 8.6                  | -47.8      | -13           | Vertical     |
| 2774.52         | -43.5       | -5.8                | 8.9                  | -46.6      | -13           | Vertical     |
| 3734.08         | -42.9       | -6.9                | 9.1                  | -45.1      | -13           | Vertical     |
| 6686.29         | -42.5       | -8.9                | 11.2                 | -44.8      | -13           | Horizontal   |
| 9966.39         | -38.6       | -13.7               | 13.8                 | -38.7      | -13           | Vertical     |
| 17812.24        | -31.1       | -15.9               | 12.4                 | -27.6      | -13           | Vertical     |

Channel 9400

| Frequency (MHz) | Power (dBm) | Pca Cable loss (dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|---------------------|----------------------|------------|---------------|--------------|
| 2443.16         | -44.7       | -5.6                | 8.6                  | -47.7      | -13           | Vertical     |
| 2760.62         | -43.2       | -5.8                | 8.9                  | -46.3      | -13           | Vertical     |
| 3744.82         | -43.5       | -6.9                | 9.1                  | -45.7      | -13           | Vertical     |
| 6695.33         | -42.9       | -8.9                | 11.2                 | -45.2      | -13           | Vertical     |
| 9966.52         | -38.3       | -13.7               | 13.8                 | -38.4      | -13           | Vertical     |
| 17846.33        | -30.9       | -15.9               | 12.4                 | -27.4      | -13           | Vertical     |

Channel 9538

| Frequency (MHz) | Power (dBm) | Pca Cable loss (dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|---------------------|----------------------|------------|---------------|--------------|
| 2463.07         | -44.4       | -5.6                | 8.6                  | -47.4      | -13           | Vertical     |
| 2801.13         | -43.3       | -5.8                | 8.9                  | -46.4      | -13           | Vertical     |
| 3753.82         | -43.5       | -6.9                | 9.1                  | -45.7      | -13           | Vertical     |
| 6676.56         | -42.6       | -8.9                | 11.2                 | -44.9      | -13           | Vertical     |
| 9984.54         | -37.9       | -13.7               | 13.8                 | -38.0      | -13           | Horizontal   |
| 17786.51        | -31.3       | -15.9               | 12.4                 | -27.8      | -13           | Vertical     |

HSDPA/HSUPA Mode:

Channel 9262

| Frequency (MHz) | Power (dBm) | Pca Cable loss (dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|---------------------|----------------------|------------|---------------|--------------|
| 2455.14         | -44.0       | -5.6                | 8.6                  | -47.0      | -13           | Horizontal   |
| 2763.73         | -43.3       | -5.8                | 8.9                  | -46.4      | -13           | Vertical     |
| 3769.05         | -43.3       | -6.9                | 9.1                  | -45.5      | -13           | Vertical     |
| 6696.55         | -42.4       | -8.9                | 11.2                 | -44.7      | -13           | Vertical     |
| 9977.76         | -38.9       | -13.7               | 13.8                 | -39.0      | -13           | Vertical     |
| 17825.53        | -32.1       | -15.9               | 12.4                 | -28.6      | -13           | Vertical     |

Channel 9400

| Frequency (MHz) | Power (dBm) | Pca Cable loss (dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|---------------------|----------------------|------------|---------------|--------------|
| 2459.28         | -45.3       | -5.6                | 8.6                  | -48.3      | -13           | Vertical     |
| 2774.08         | -44.7       | -5.8                | 8.9                  | -47.8      | -13           | Vertical     |
| 3762.13         | -43.6       | -6.9                | 9.1                  | -45.8      | -13           | Vertical     |
| 6684.90         | -42.9       | -8.9                | 11.2                 | -45.2      | -13           | Vertical     |
| 9974.98         | -38.8       | -13.7               | 13.8                 | -38.9      | -13           | Vertical     |
| 17823.81        | -31.3       | -15.9               | 12.4                 | -27.8      | -13           | Vertical     |

Channel 9538

| Frequency<br>(MHz) | Power<br>(dBm) | Pca<br>Cable loss<br>(dB) | Ga<br>Antenna<br>Gain (dB) | Pmea<br>(dBm) | Limited<br>(dBm) | Polarization |
|--------------------|----------------|---------------------------|----------------------------|---------------|------------------|--------------|
| 2464.00            | -45.0          | -5.6                      | 8.6                        | -48.0         | -13              | Vertical     |
| 2743.34            | -44.5          | -5.8                      | 8.9                        | -47.6         | -13              | Vertical     |
| 3767.94            | -43.8          | -6.9                      | 9.1                        | -46.0         | -13              | Horizontal   |
| 6698.70            | -42.6          | -8.9                      | 11.2                       | -44.9         | -13              | Vertical     |
| 9971.40            | -37.6          | -13.7                     | 13.8                       | -37.7         | -13              | Vertical     |
| 17788.09           | -32.4          | -15.9                     | 12.4                       | -28.9         | -13              | Vertical     |


## 2.2.2 WCDMA Band V

### 2.2.2.1 RF Power Output-FCC Part22.913(a)

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 19.3°C      | 41.3%             | 100.7kPa |

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

| Limits | $\leq 24\text{dBm}$ |
|--------|---------------------|
|--------|---------------------|

Test result:

WCDMA Mode:

| Carrier frequency (MHz) | Channel No. | RF Power Output (dBm) |
|-------------------------|-------------|-----------------------|
| 826.4                   | 4132        | 21.36                 |
| 836.6                   | 4183        | 22.16                 |
| 846.6                   | 4233        | 21.48                 |

HSDPA/HSUPA Mode:


| Carrier frequency (MHz) | Channel No. | RF Power Output (dBm) |
|-------------------------|-------------|-----------------------|
| 826.4                   | 4132        | 18.70                 |
| 836.6                   | 4183        | 19.20                 |
| 846.6                   | 4233        | 18.70                 |

## 2.2.2.2 Effective Radiated Power-FCC Part22.913(a)


Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21.4°C      | 37.4%             | 100.2kPa |

Test setup:

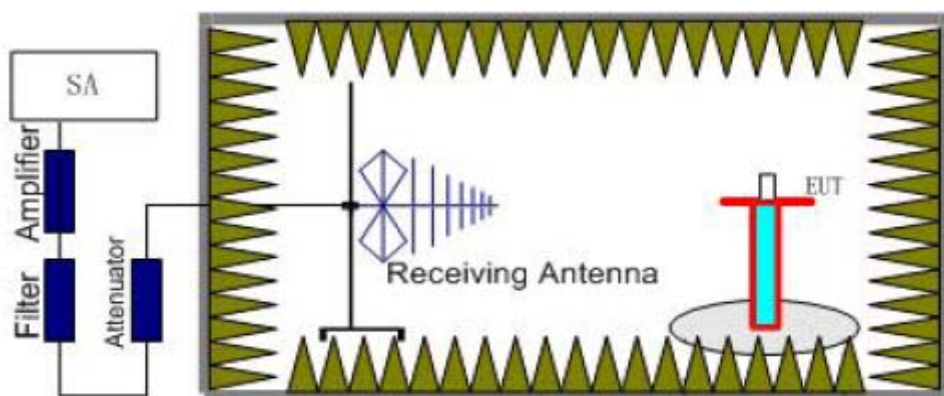

Step 1

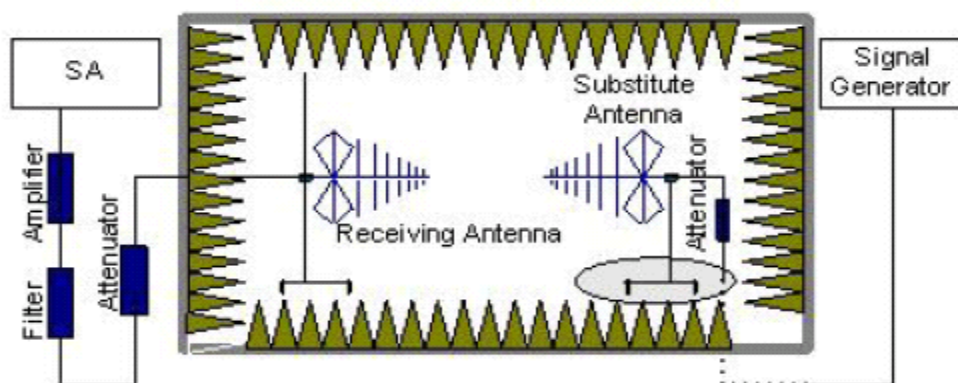

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established

between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P<sub>mea</sub>) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P<sub>mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P<sub>ca</sub>) and the Substitution Antenna Gain (G<sub>a</sub>).

The measurement results are obtained as described below:

Power (EIRP) = P<sub>mea</sub>+ P<sub>ca</sub>+ G<sub>a</sub>

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP – 2.15 (dB).

The measurement will be done at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

|        |          |
|--------|----------|
| Limits | ≤38.5dBm |
|--------|----------|

Test result:

WCDMA Mode:

| Frequency (MHz) | Peak ERP (dBm) | Pca Cable loss (dB) | Ga Antenna Gain (dB) | Correction (dB) | Pmea (dBm) | Polarization |
|-----------------|----------------|---------------------|----------------------|-----------------|------------|--------------|
| 826.4           | 20.4           | -3.8                | 8.6                  | 2.15            | 17.75      | Vertical     |
| 836.6           | 21.2           | -3.8                | 8.6                  | 2.15            | 18.55      | Vertical     |
| 846.6           | 20.3           | -3.8                | 8.6                  | 2.15            | 17.65      | Vertical     |

HSDPA/HSUPA Mode:

| Frequency (MHz) | Peak ERP (dBm) | Pca Cable loss (dB) | Ga Antenna Gain (dB) | Correction (dB) | Pmea (dBm) | Polarization |
|-----------------|----------------|---------------------|----------------------|-----------------|------------|--------------|
| 826.4           | 17.1           | -3.8                | 8.6                  | 2.15            | 14.45      | Vertical     |
| 836.6           | 17.2           | -3.8                | 8.6                  | 2.15            | 14.55      | Vertical     |
| 846.6           | 16.5           | -3.8                | 8.6                  | 2.15            | 13.85      | Vertical     |

Frequency: 836.6MHz


Peak ERP(dBm) = Pmea(18.55dBm)+Pca(-3.8dB)+Ga(8.6dB)-2.15dB = 21.2dBm

### 2.2.2.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test Setup:

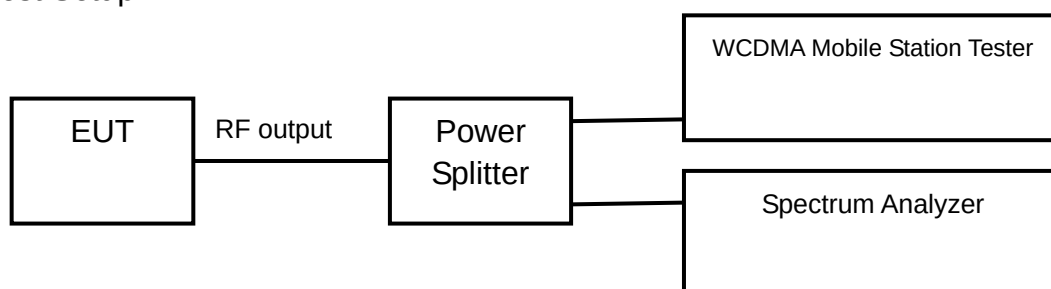

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


WCDMA Mode:

| Carrier frequency (MHz) | Channel No. | Bandwidth of 99% Power (MHz) |
|-------------------------|-------------|------------------------------|
| 826.4                   | 4132        | 4.1537                       |
| 836.6                   | 4183        | 4.1588                       |
| 846.6                   | 4233        | 4.1596                       |


HSDPA/HSUPA Mode:

| Carrier frequency (MHz) | Channel No. | Bandwidth of 99% Power (MHz) |
|-------------------------|-------------|------------------------------|
| 826.4                   | 4132        | 4.1550                       |
| 836.6                   | 4183        | 4.1602                       |
| 846.6                   | 4233        | 4.1521                       |


WCDMA Mode:

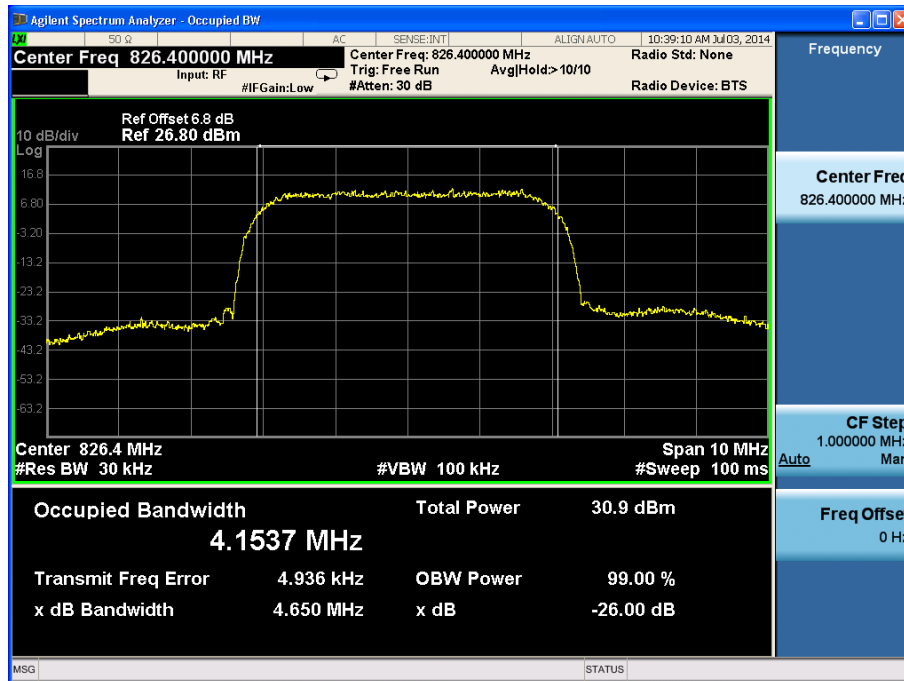

Channel 4132

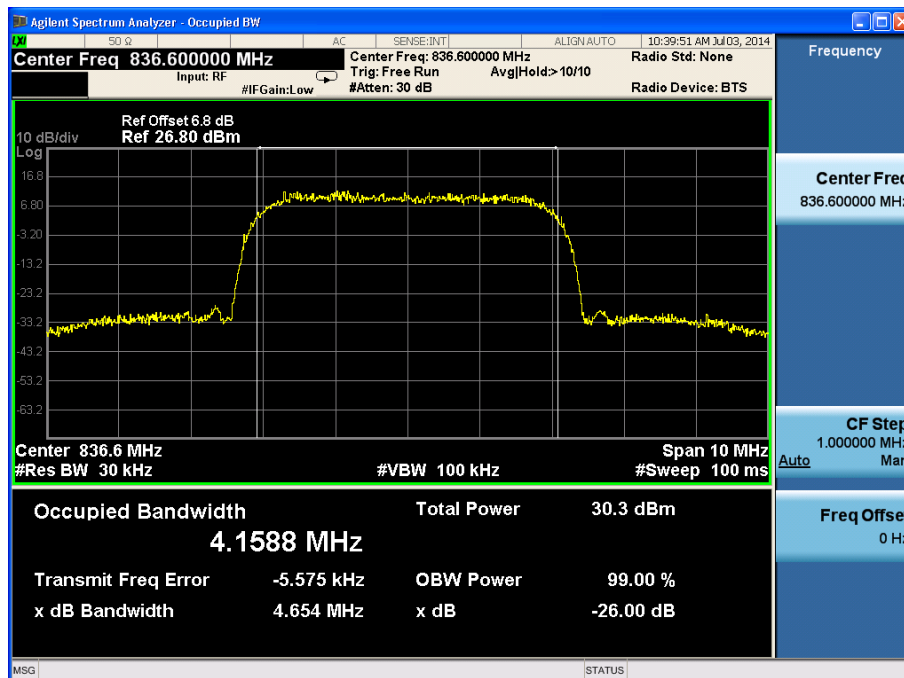


Channel 4183

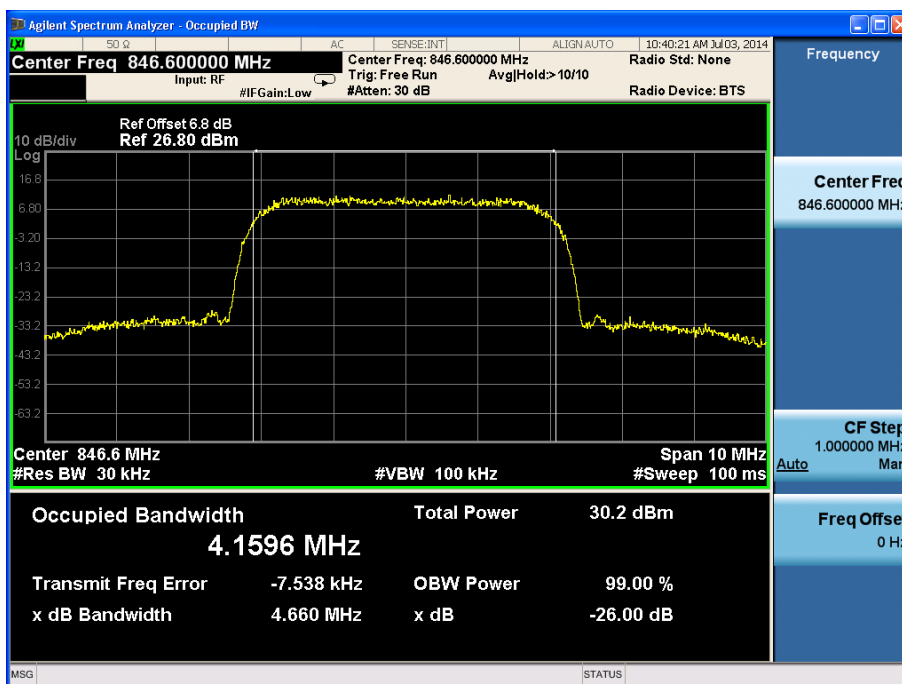


Channel 4233


HSDPA/HSUPA Mode:

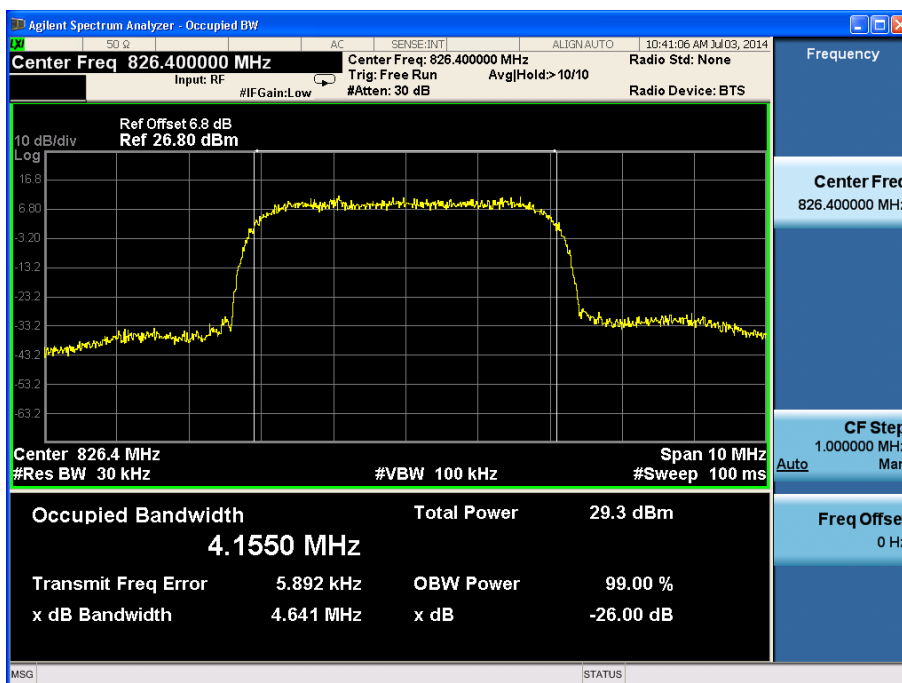

Channel 4132

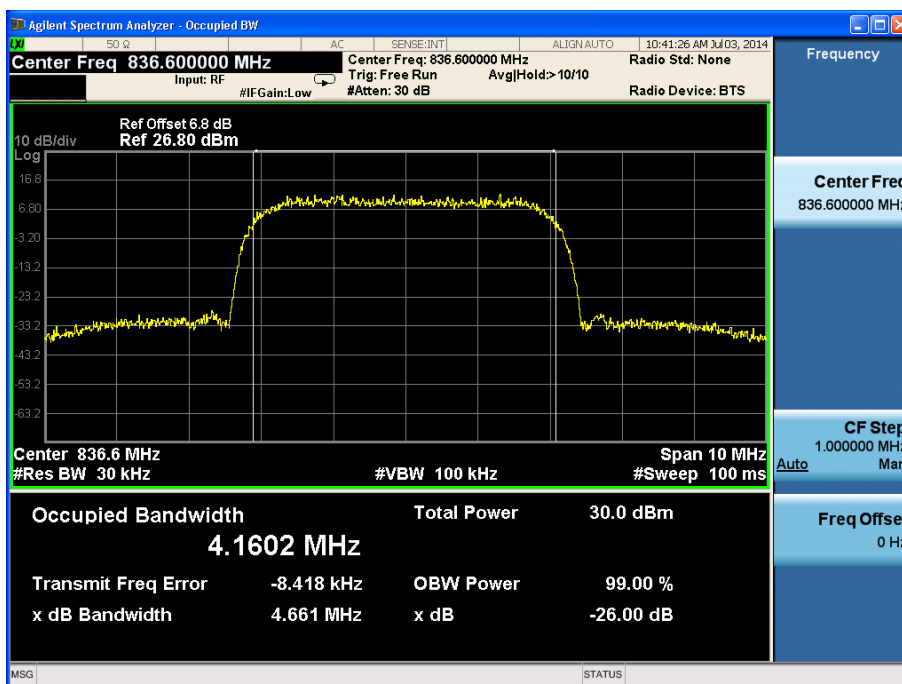

Channel 4183

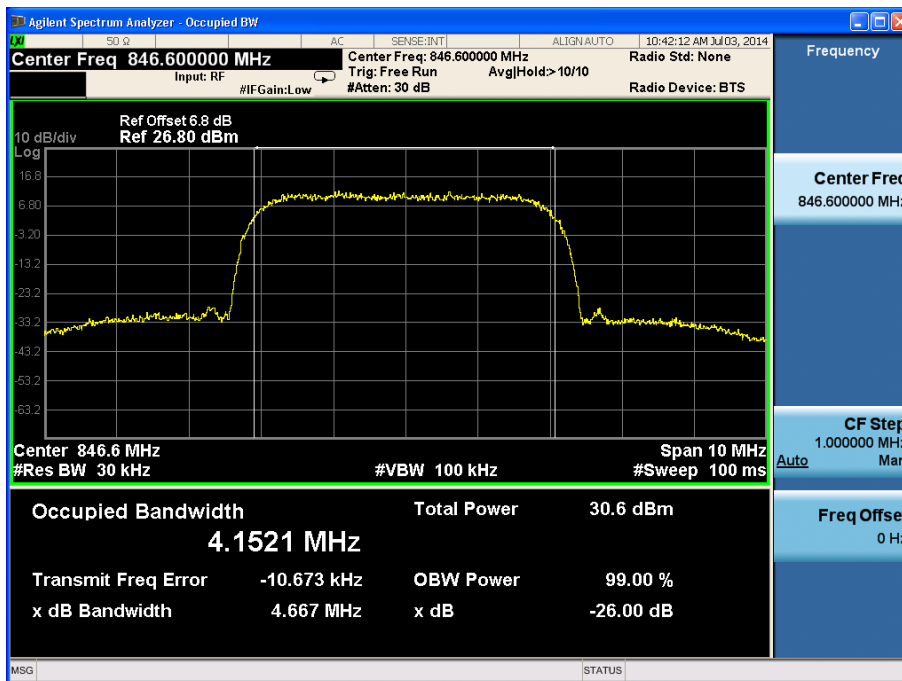


Channel 4233

## 2.2.2.4 Emission Bandwidth-FCC Part22.917(b)

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21.4°C      | 37.4%             | 100.2kPa |

Test Setup:

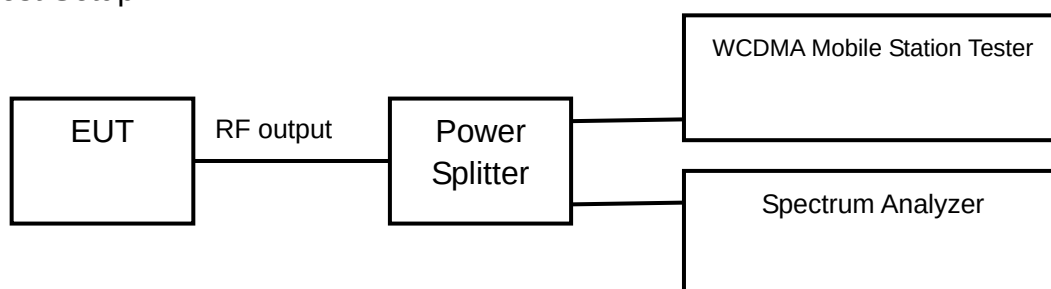

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of -26dBc power can be read on spectrum analyzer.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band V)

Limits: No specific emission bandwidth requirements in part 22.917(b)

Test result:

WCDMA Mode:

| Carrier frequency (MHz) | Channel No. | Bandwidth of -26dBc Power (MHz) |
|-------------------------|-------------|---------------------------------|
| 826.4                   | 4132        | 4.650                           |
| 836.6                   | 4183        | 4.654                           |
| 846.6                   | 4233        | 4.660                           |

HSDPA/HSUPA Mode:


| Carrier frequency (MHz) | Channel No. | Bandwidth of -26dBc Power (MHz) |
|-------------------------|-------------|---------------------------------|
| 826.4                   | 4132        | 4.641                           |
| 836.6                   | 4183        | 4.661                           |
| 846.6                   | 4233        | 4.667                           |

## 2.2.2.5 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test Setup:

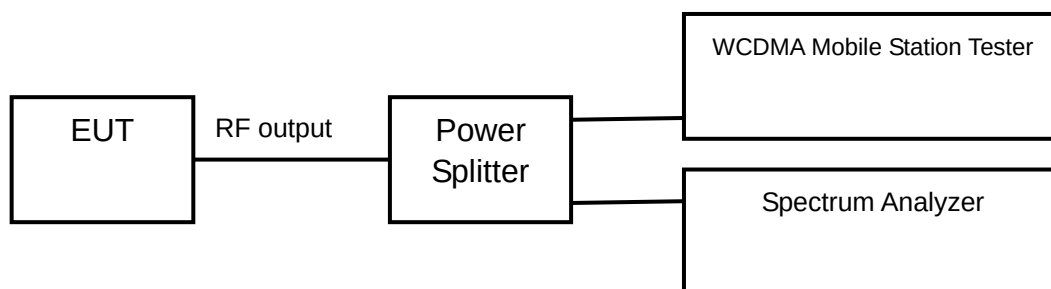

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 9GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No4183 (middle channel of WCDMA band V)

| Limits | $\leq -13\text{dBm}$ |
|--------|----------------------|
|--------|----------------------|


Test result:

Refer to the following figures.

WCDMA Mode:

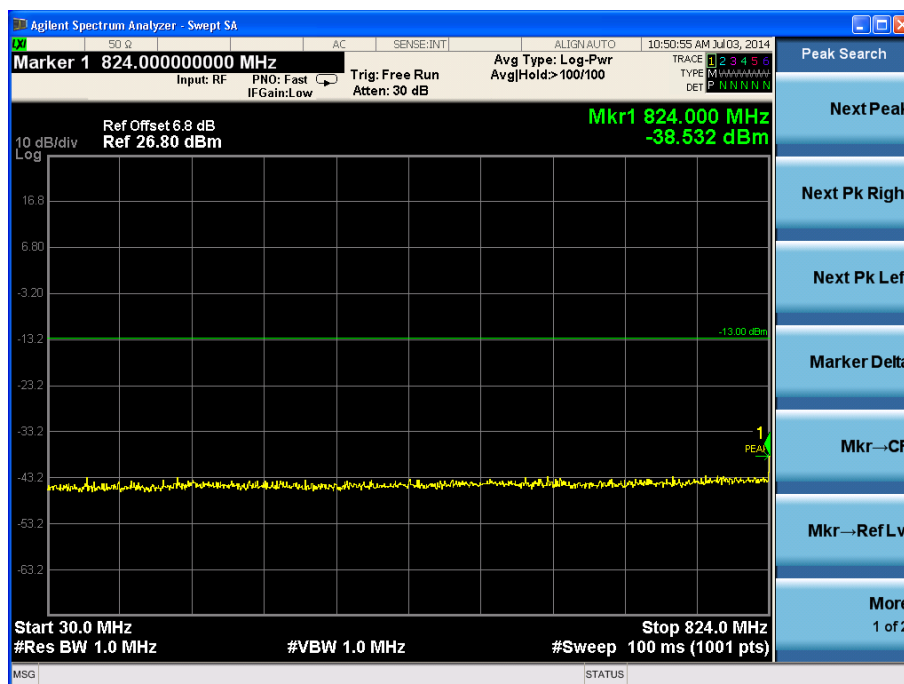


Channel 4183, 30MHz~824MHz

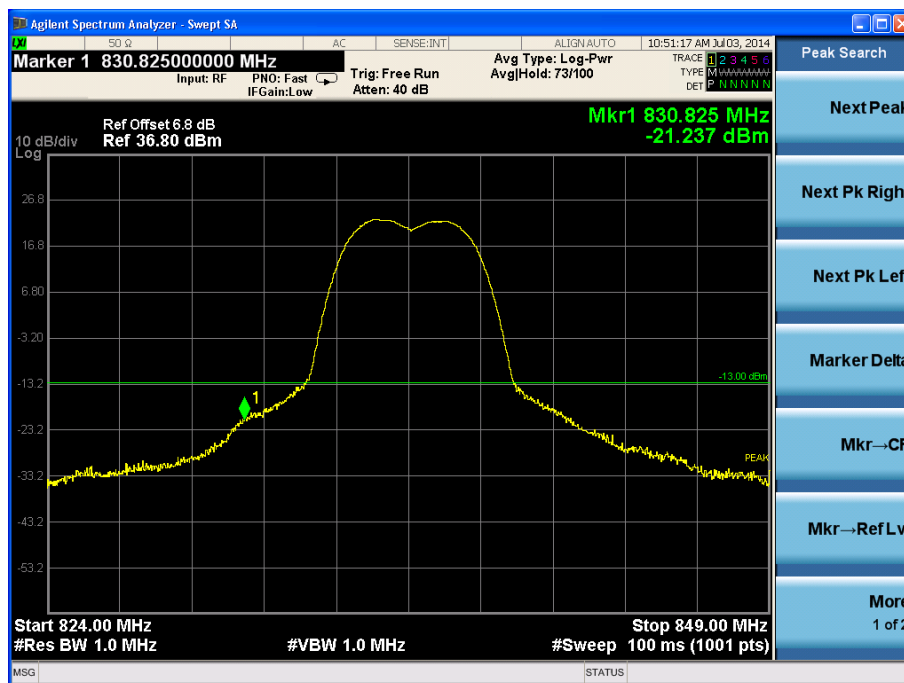


Channel 4183, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

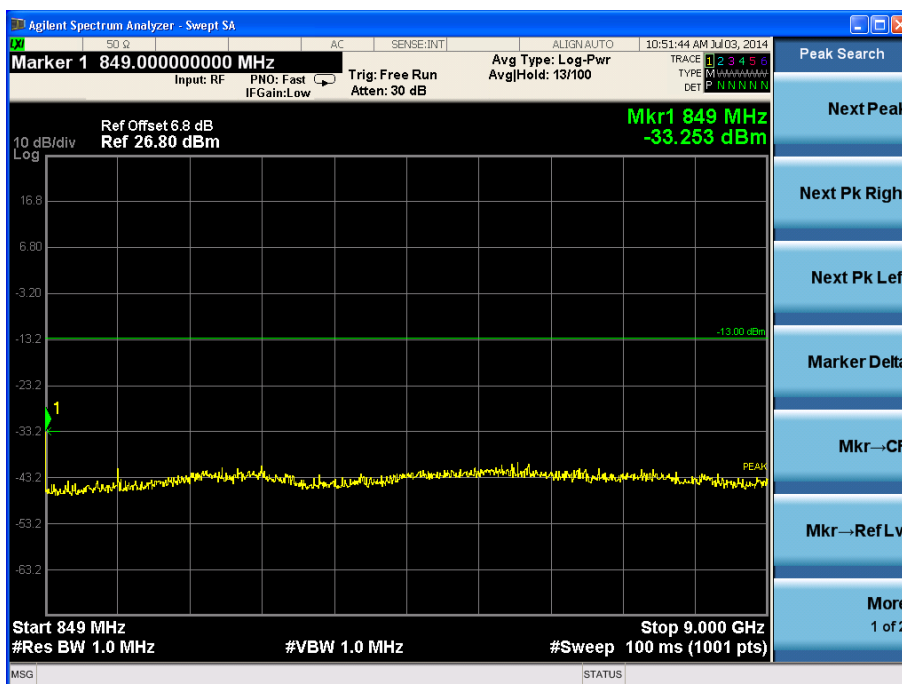


Channel 4183, 849MHz~9GHz

HSDPA/HSUPA Mode:

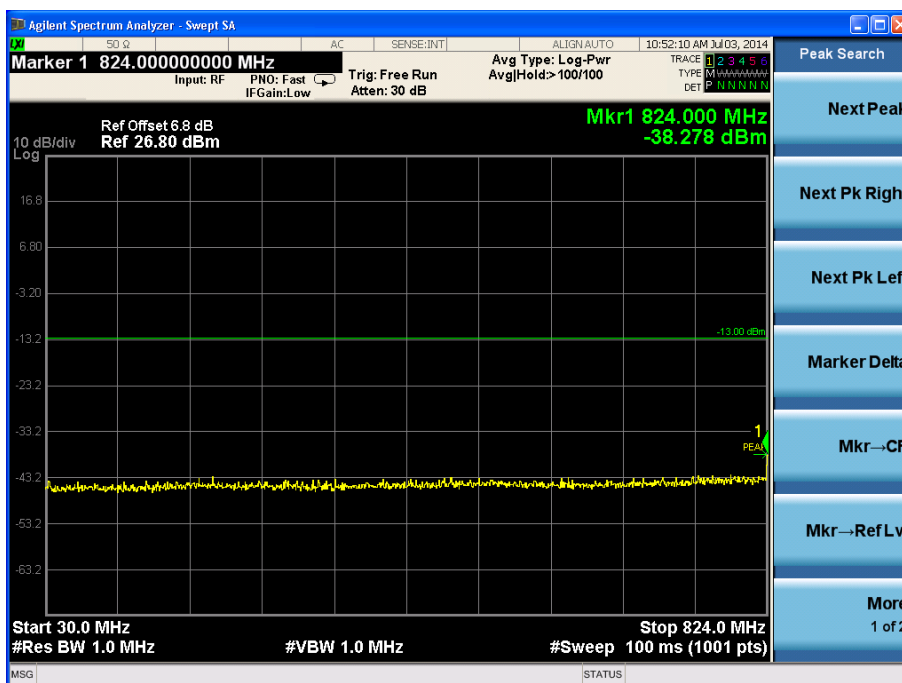


Channel 4183, 30MHz~824MHz

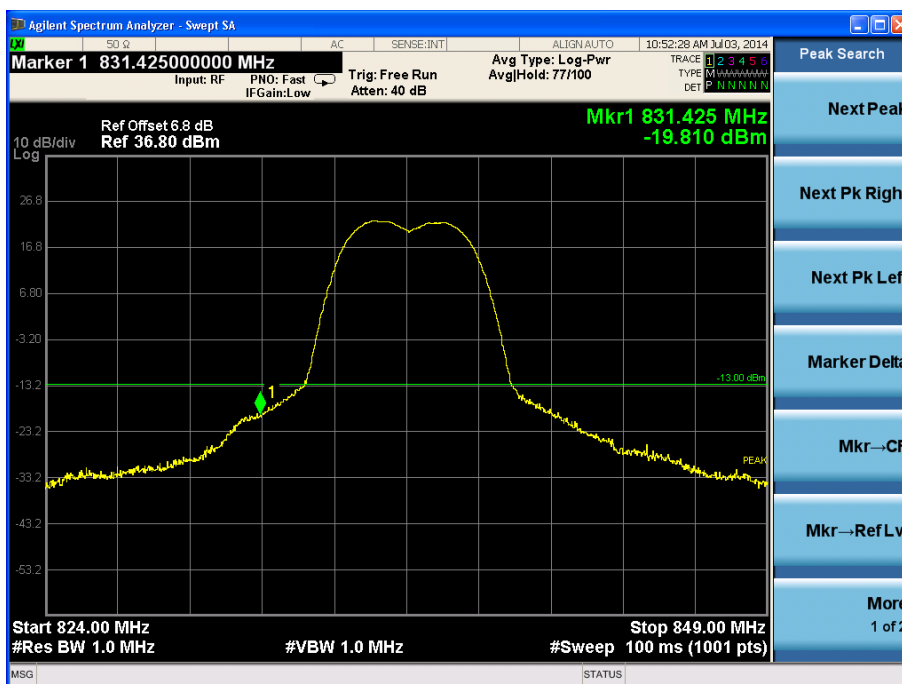

Channel 4183, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

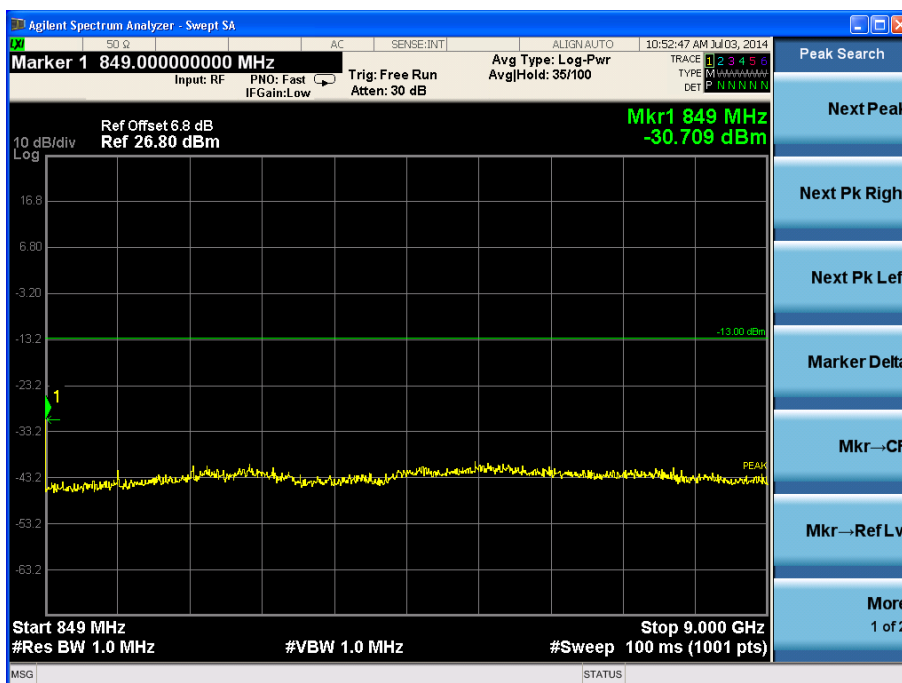


Channel 4183, 849MHz~9GHz

## 2.2.2.6 Band Edges Compliance-FCC Part22.917(b)

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test Setup:

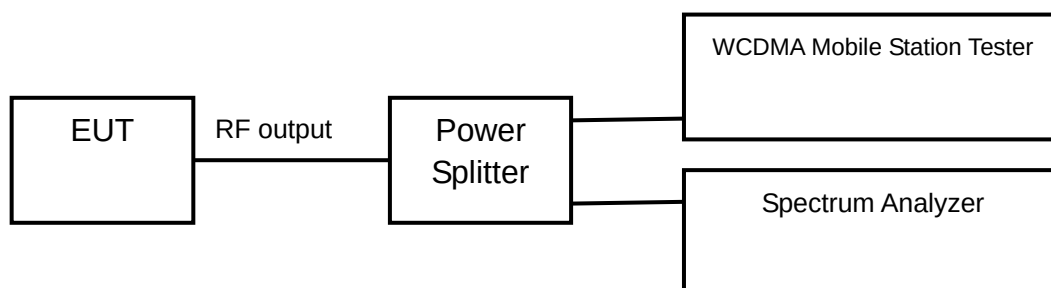

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No4132 and No4233 (Bottom and top channels of WCDMA band V)

|        |                      |
|--------|----------------------|
| Limits | $\leq -13\text{dBm}$ |
|--------|----------------------|


Test result:

Refer to the following figures.

WCDMA Mode:

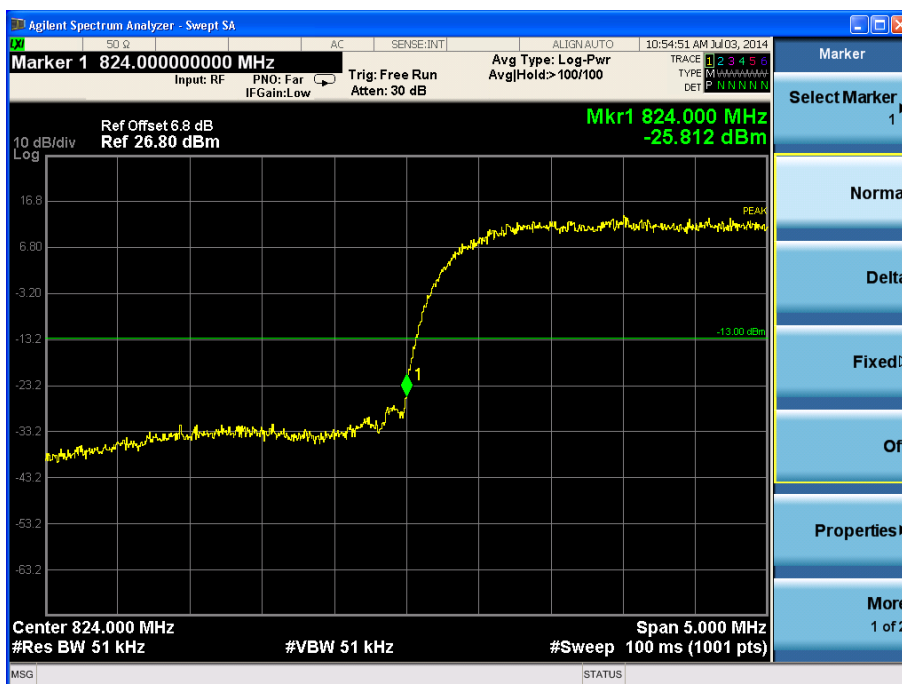


Channel 4132

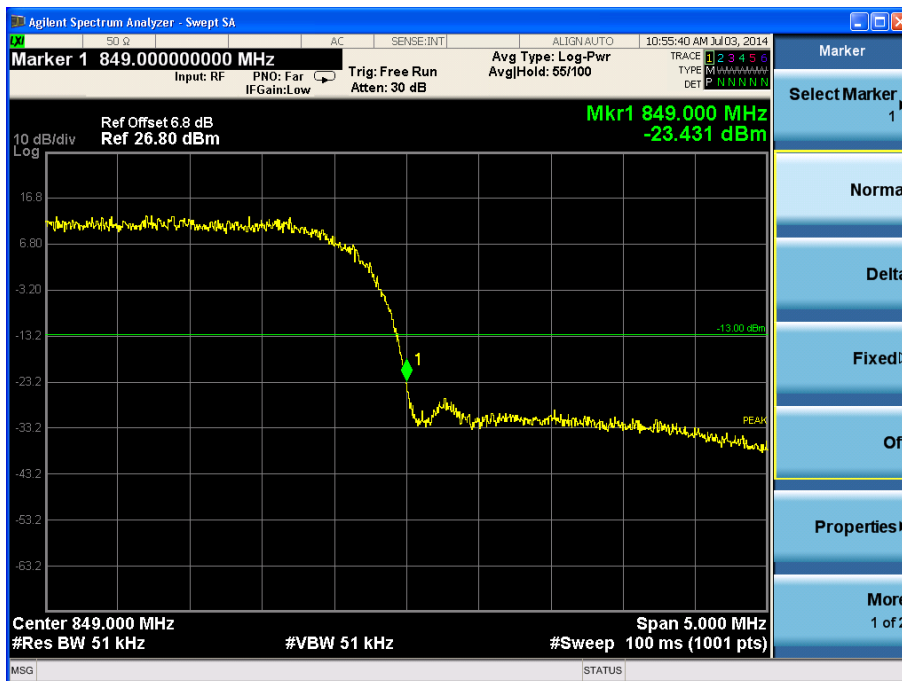


Channel 4233

HSDPA/HSUPA Mode:

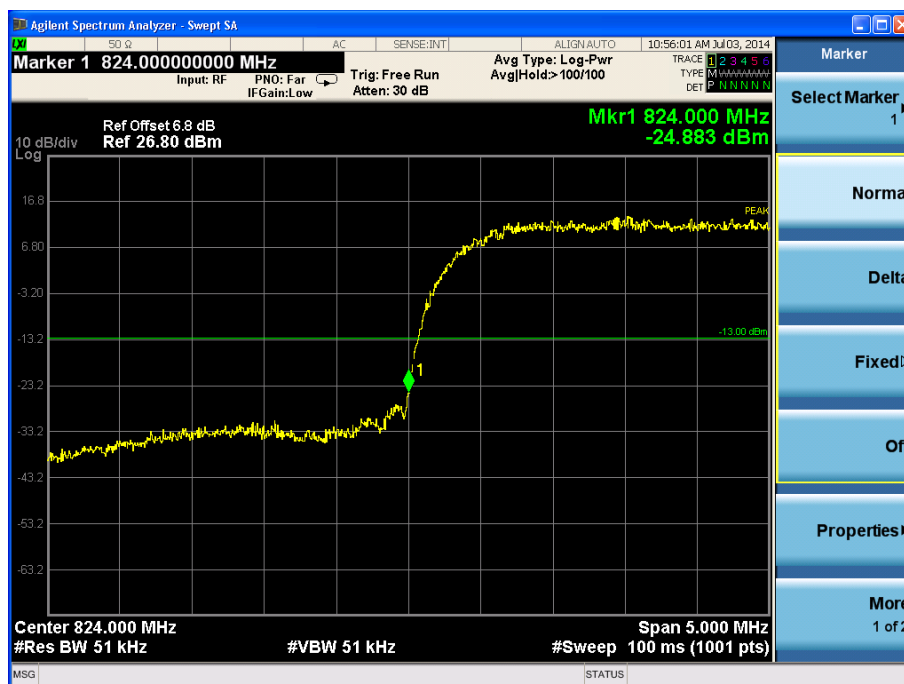

Channel 4132

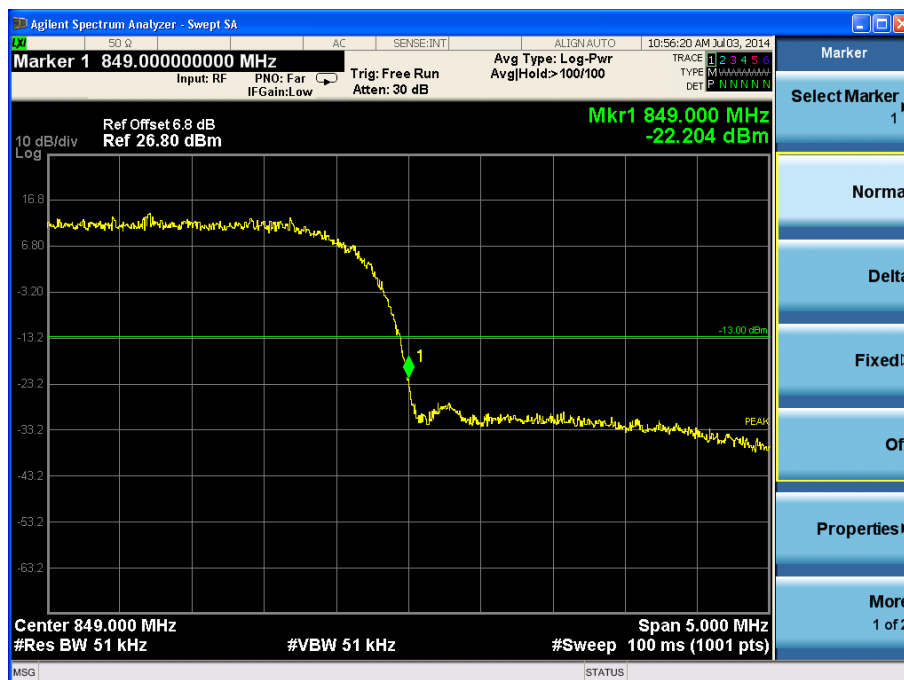


Channel 4233

## 2.2.2.7 Frequency Stability-FCC Part2.1055/22.355

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21°C        | 44%               | 101.5kPa |

Test setup:

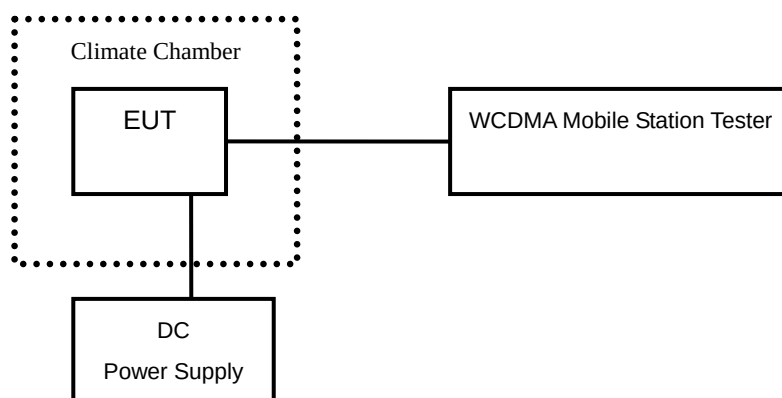

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.2V. The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V).

Limits: No specific frequency stability requirements in part 2.1055 and part 22.355.

Test result:

WCDMA Mode:

| Temperature(°C) | Test Result (ppm)@3.7V |              |              |
|-----------------|------------------------|--------------|--------------|
|                 | Channel 4132           | Channel 4183 | Channel 4233 |
| -30             | 0.024                  | 0.022        | 0.019        |
| -20             | 0.022                  | 0.022        | 0.019        |
| -10             | 0.022                  | 0.021        | 0.021        |
| 0               | 0.023                  | 0.023        | 0.019        |
| +10             | 0.023                  | 0.022        | 0.020        |
| +20             | 0.022                  | 0.023        | 0.019        |
| +30             | 0.022                  | 0.022        | 0.019        |
| +40             | 0.022                  | 0.022        | 0.019        |
| +50             | 0.022                  | 0.021        | 0.019        |

| Voltage (V) | Test Result (ppm)@20°C |              |              |
|-------------|------------------------|--------------|--------------|
|             | Channel 4132           | Channel 4183 | Channel 4233 |
| 3.5         | 0.021                  | 0.021        | 0.018        |
| 4.2         | 0.021                  | 0.022        | 0.019        |

HSDPA/HSUPA Mode:

| Temperature(°C) | Test Result (ppm)@3.7V |              |              |
|-----------------|------------------------|--------------|--------------|
|                 | Channel 4132           | Channel 4183 | Channel 4233 |
| -30             | 0.021                  | 0.022        | 0.021        |
| -20             | 0.022                  | 0.023        | 0.019        |
| -10             | 0.021                  | 0.022        | 0.021        |
| 0               | 0.021                  | 0.022        | 0.019        |
| +10             | 0.021                  | 0.022        | 0.019        |
| +20             | 0.021                  | 0.022        | 0.021        |
| +30             | 0.022                  | 0.023        | 0.019        |
| +40             | 0.021                  | 0.024        | 0.021        |
| +50             | 0.021                  | 0.024        | 0.021        |


| Voltage (V) | Test Result (ppm)@20°C |              |              |
|-------------|------------------------|--------------|--------------|
|             | Channel 4132           | Channel 4183 | Channel 4233 |
| 3.5         | 0.021                  | 0.021        | 0.020        |
| 4.2         | 0.022                  | 0.021        | 0.019        |

## 2.2.2.8 Radiated Spurious Emissions-FCC Part2.1053/22.917(a)


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 21.4°C      | 37.4%             | 100.2kPa |

Test Setup:

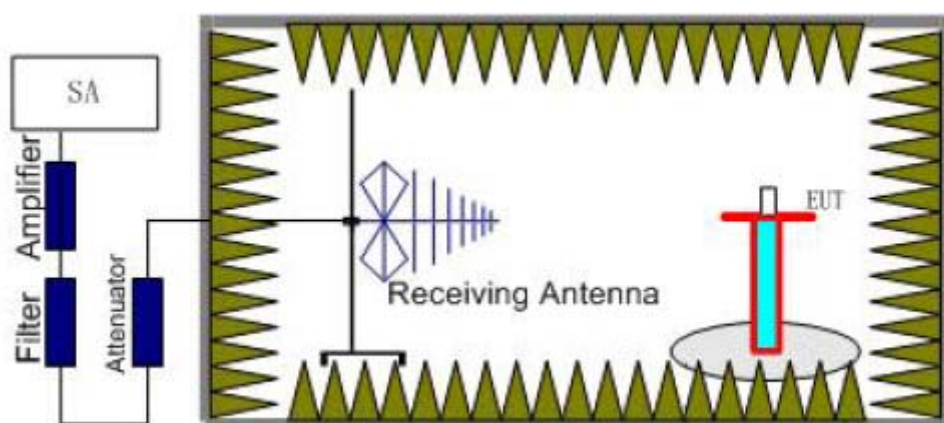

Step 1

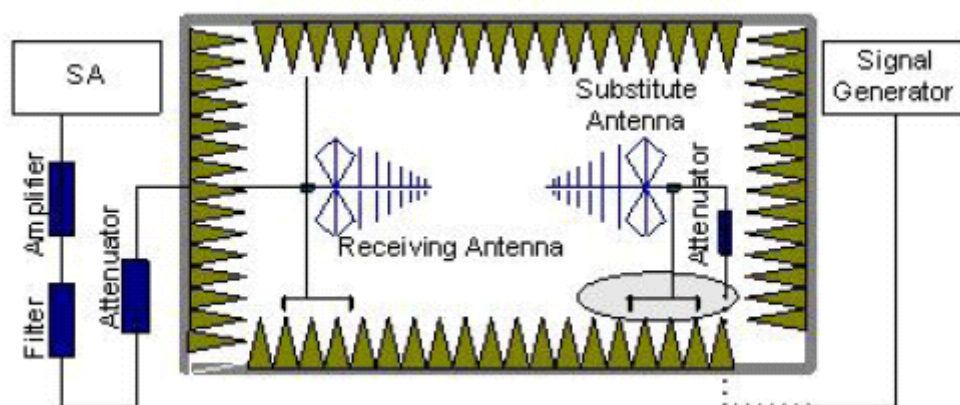

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed

on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power ( $P_{mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna ( $P_{ca}$ ) and the Substitution Antenna Gain ( $G_a$ ).

#### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{ (dB)}$ .

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_{\text{a}} = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 4132), middle (Channel 4183) and top (Channel 4233) channels of WCDMA band V.

Test result:

WCDMA Mode:

Channel 4132

| Frequency (MHz) | Power (dBm) | Pca Cable loss(dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|--------------------|----------------------|------------|---------------|--------------|
| 1627.34         | -51.6       | -4.6               | 8.3                  | -55.3      | -13           | Vertical     |
| 1674.32         | -50.8       | -4.8               | 8.3                  | -54.3      | -13           | Vertical     |
| 2536.02         | -44.0       | -5.7               | 8.9                  | -47.2      | -13           | Vertical     |
| 2565.10         | -43.2       | -5.9               | 8.9                  | -46.2      | -13           | Horizontal   |
| 8967.74         | -40.0       | -10.8              | 12.7                 | -41.9      | -13           | Vertical     |
| 9981.58         | -36.6       | -11.8              | 13.8                 | -38.6      | -13           | Vertical     |

Channel 4183

| Frequency (MHz) | Power (dBm) | Pca Cable loss(dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|--------------------|----------------------|------------|---------------|--------------|
| 1643.82         | -51.5       | -4.6               | 8.3                  | -55.2      | -13           | Vertical     |
| 1656.88         | -50.3       | -4.8               | 8.3                  | -53.8      | -13           | Horizontal   |
| 2534.13         | -43.1       | -5.7               | 8.9                  | -46.3      | -13           | Vertical     |
| 2569.61         | -43.3       | -5.9               | 8.9                  | -46.3      | -13           | Vertical     |
| 8964.00         | -40.5       | -10.8              | 12.7                 | -42.4      | -13           | Vertical     |
| 9976.19         | -36.6       | -11.8              | 13.8                 | -38.6      | -13           | Vertical     |

### Channel 4233

| Frequency (MHz) | Power (dBm) | Pca Cable loss(dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|--------------------|----------------------|------------|---------------|--------------|
| 1630.34         | -52.6       | -4.6               | 8.3                  | -56.3      | -13           | Vertical     |
| 1677.48         | -51.9       | -4.8               | 8.3                  | -55.4      | -13           | Vertical     |
| 2534.30         | -44.2       | -5.7               | 8.9                  | -47.4      | -13           | Horizontal   |
| 2568.01         | -42.9       | -5.9               | 8.9                  | -45.9      | -13           | Vertical     |
| 8979.82         | -39.0       | -10.8              | 12.7                 | -40.9      | -13           | Vertical     |
| 9974.01         | -36.8       | -11.8              | 13.8                 | -38.8      | -13           | Vertical     |

### HSDPA/HSUPA Mode:

#### Channel 4132

| Frequency (MHz) | Power (dBm) | Pca Cable loss(dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|--------------------|----------------------|------------|---------------|--------------|
| 1642.66         | -52.2       | -4.6               | 8.3                  | -55.9      | -13           | Vertical     |
| 1667.64         | -51.5       | -4.8               | 8.3                  | -55.0      | -13           | Vertical     |
| 2556.56         | -43.8       | -5.7               | 8.9                  | -47.0      | -13           | Vertical     |
| 2570.90         | -43.8       | -5.9               | 8.9                  | -46.8      | -13           | Horizontal   |
| 8985.80         | -40.0       | -10.8              | 12.7                 | -41.9      | -13           | Vertical     |
| 9976.57         | -36.3       | -11.8              | 13.8                 | -38.3      | -13           | Vertical     |

#### Channel 4183

| Frequency (MHz) | Power (dBm) | Pca Cable loss(dB) | Ga Antenna Gain (dB) | Pmea (dBm) | Limited (dBm) | Polarization |
|-----------------|-------------|--------------------|----------------------|------------|---------------|--------------|
| 1637.68         | -52.3       | -4.6               | 8.3                  | -56.0      | -13           | Vertical     |
| 1648.93         | -51.5       | -4.8               | 8.3                  | -55.0      | -13           | Vertical     |
| 2550.42         | -45.3       | -5.7               | 8.9                  | -48.5      | -13           | Vertical     |
| 2570.13         | -44.0       | -5.9               | 8.9                  | -47.0      | -13           | Vertical     |
| 8984.96         | -40.4       | -10.8              | 12.7                 | -42.3      | -13           | Vertical     |
| 9973.20         | -36.5       | -11.8              | 13.8                 | -38.5      | -13           | Vertical     |

Channel 4233

| Frequency<br>(MHz) | Power<br>(dBm) | Pca<br>Cable<br>loss(dB) | Ga<br>Antenna<br>Gain (dB) | Pmea<br>(dBm) | Limited<br>(dBm) | Polarization |
|--------------------|----------------|--------------------------|----------------------------|---------------|------------------|--------------|
| 1645.97            | -52.3          | -4.6                     | 8.3                        | -56.0         | -13              | Vertical     |
| 1666.85            | -51.2          | -4.8                     | 8.3                        | -54.7         | -13              | Vertical     |
| 2534.75            | -43.9          | -5.7                     | 8.9                        | -47.1         | -13              | Vertical     |
| 2573.56            | -43.8          | -5.9                     | 8.9                        | -46.8         | -13              | Vertical     |
| 8965.40            | -39.0          | -10.8                    | 12.7                       | -40.9         | -13              | Horizontal   |
| 9968.00            | -36.2          | -11.8                    | 13.8                       | -38.2         | -13              | Vertical     |

### 2.3. List of test equipments

| No. | Name/Model                                  | Manufacturer | S/N        | Calibration Due Date |
|-----|---------------------------------------------|--------------|------------|----------------------|
| 1   | E5515C(8960) Mobile Station Tester          | Agilent      | MY48367401 | 2014.8               |
| 2   | N9020A Spectrum Analyzer                    | Agilent      | MY48010771 | 2014.8               |
| 3   | DC Power Supply E3645A                      | Agilent      | MY40000740 | 2014.8               |
| 4   | Power Splitter 11850C                       | Agilent      | 026057     | 2014.8               |
| 5   | Temperature chamber SH241                   | ESPEC        | 92000390   | 2014.8               |
| 6   | 12.65m×8.03m×7.50m Fully-Anechoic Chamber   | FRANKONIA    | -----      | -----                |
| 7   | Turn table Diameter:1m                      | HD           | -----      | -----                |
| 8   | Antenna master FAC(MA4.0)                   | MATURO       | -----      | -----                |
| 9   | HF 906 Double-Ridged Waveguide Horn Antenna | R&S          | 100030     | 2014.8               |
| 10  | HL562 Ultra log antenna                     | R&S          | 100016     | 2014.8               |
| 11  | 3160-09 Receive antenna                     | SCHWARZ-BECK | 002058-002 | 2014.8               |
| 12  | ESI 40 EMI test receiver                    | R&S          | 100015     | 2014.8               |
| 13  | Radio tester                                | CMU 200      | 114667     | 2014.8               |

## Appendix

### Appendix1 Test Setup