FCC PART 15C
TEST REPORT
No. I14N01237-WLAN

For

Shenzhen Sang Fei Consumer Communications Co., Ltd.

WCDMA/GSM Digital Mobile Phone

Model Name: Philips S398

Marketing Name: Philips S398

With

Hardware Version: WMBUa

Software Version: S398_M6582K_1443_V01A_AM_FCC

FCC ID: VQRCTS398

Issued Date: Nov 10th, 2014

Test Laboratory:

FCC 2.948 Listed: No.310359

IC O.A.T.S listed: No.6629C-1

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2678 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY 8

1.1. TESTING LOCATION 8
1.2. TESTING ENVIRONMENT 8
1.3. PROJECT DATA 8
1.4. SIGNATURE 8

2. CLIENT INFORMATION 9

2.1. APPLICANT INFORMATION 9
2.2. MANUFACTURER INFORMATION 9

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) 10

3.1. ABOUT EUT 10
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST 10
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST 10

4. REFERENCE DOCUMENTS 11

4.1. DOCUMENTS SUPPLIED BY APPLICANT 11
4.2. REFERENCE DOCUMENTS FOR TESTING 11

5. LABORATORY ENVIRONMENT 12

6. SUMMARY OF TEST RESULTS 13

6.1. SUMMARY OF TEST RESULTS 13
6.2. STATEMENTS 13
6.3. TERMS USED IN THE RESULT TABLE 13

7. TEST EQUIPMENTS UTILIZED 14

ANNEX A: EUT PHOTOGRAPH 15

ANNEX B: MEASUREMENT RESULTS 17

B.0 ANTENNA REQUIREMENT 17
B.1 MAXIMUM AVERAGE OUTPUT POWER 18
B.2 PEAK POWER SPECTRAL DENSITY 20
B.3 OCCUPIED 6DB BANDWIDTH 21
B.4 BAND EDGES COMPLIANCE 22
B.5 TRANSMITTER SPURIOUS EMISSION 23
B.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED 23
B.5.2 TRANSMITTER SPURIOUS EMISSION - RADIATED 25
B.6 AC POWERLINE CONDUCTED EMISSION 36

ANNEX C: TEST FIGURE LIST 37

FIG. 1 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,1MBPS) 37
FIG. 2 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,1MBPS) 37
FIG. 3 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,1MBPS) 38

©Copyright. All rights reserved by TMC Beijing.

FIG. 4 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,2MBPS) 38
FIG. 5 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,2MBPS) 39
FIG. 6 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,2MBPS)..... 39
FIG. 7 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,5.5MBPS) 40
FIG. 8 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,5.5MBPS) 40
FIG. 9 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,5.5MBPS)..... 41
FIG. 10 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,11MBPS)..... 41
FIG. 11 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,11MBPS)..... 42
FIG. 12 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,11MBPS)..... 42
FIG. 13 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,6MBPS)..... 43
FIG. 14 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,6MBPS)..... 43
FIG. 15 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,6MBPS)..... 44
FIG. 16 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,9MBPS)..... 44
FIG. 17 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,9MBPS)..... 45
FIG. 18 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,9MBPS)..... 45
FIG. 19 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,12MBPS)..... 46
FIG. 20 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,12MBPS)..... 46
FIG. 21 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,12MBPS)..... 47
FIG. 22 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,18MBPS)..... 47
FIG. 23 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,18MBPS)..... 48
FIG. 24 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,18MBPS)..... 48
FIG. 25 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,24MBPS)..... 49
FIG. 26 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,24MBPS)..... 49
FIG. 27 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,24MBPS)..... 50
FIG. 28 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,36MBPS)..... 50
FIG. 29 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,36MBPS)..... 51
FIG. 30 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,36MBPS)..... 51
FIG. 31 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,48MBPS)..... 52
FIG. 32 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,48MBPS)..... 52
FIG. 33 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,48MBPS)..... 53
FIG. 34 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,54MBPS)..... 53
FIG. 35 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,54MBPS)..... 54
FIG. 36 MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,54MBPS)..... 54
FIG. 37 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS0) 55
FIG. 38 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS0) 55
FIG. 39 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS0)..... 56
FIG. 40 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS1) 56
FIG. 41 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS1) 57
FIG. 42 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS1)..... 57
FIG. 43 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS2) 58
FIG. 44 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS2)) 58
FIG. 45 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS2)..... 59
FIG. 46 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS3) 59
FIG. 47 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS3) 60

©Copyright. All rights reserved by TMC Beijing.

FIG. 48 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS3)..... 60
FIG. 49 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS4) 61
FIG. 50 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS4) 61
FIG. 51 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS4)..... 62
FIG. 52 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS5) 62
FIG. 53 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS5) 63
FIG. 54 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS5)..... 63
FIG. 55 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS6) 64
FIG. 56 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS6) 64
FIG. 57 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS6)..... 65
FIG. 58 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS7) 65
FIG. 59 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS7) 66
FIG. 60 MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS7)..... 66
FIG. 61 MAXIMUM AVERAGE OUTPUT POWER (802.11N-40MHZ, CH 1,MCS0) 67
FIG. 62 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH6,MCS0) 67
FIG. 63 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH11,MCS0) 68
FIG. 64 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH1,MCS1) 68
FIG. 65 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH6,MCS1) 69
FIG. 66 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH11,MCS1) 69
FIG. 67 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH1,MCS2) 70
FIG. 68 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH6,MCS2) 70
FIG. 69 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH11,MCS2) 71
FIG. 70 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH1,MCS3) 71
FIG. 71 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH6,MCS3) 72
FIG. 72 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH11,MCS3) 72
FIG. 73 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH1,MCS4) 73
FIG. 74 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH6,MCS4) 73
FIG. 75 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH11,MCS4) 74
FIG. 76 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH1,MCS5) 74
FIG. 77 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH6,MCS5) 75
FIG. 78 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH11,MCS5) 75
FIG. 79 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH1,MCS6) 76
FIG. 80 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH6,MCS6) 76
FIG. 81 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH11,MCS6) 77
FIG. 82 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH1,MCS7) 77
FIG. 83 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH6,MCS7) 78
FIG. 84 MAXIMUM AVERAGE OUTPUT POWER (802.11N- 40MHZ,CH11,MCS7) 78
FIG. 85 POWER SPECTRAL DENSITY (802.11B, CH 1)..... 79
FIG. 86 POWER SPECTRAL DENSITY (802.11B, CH 6)..... 79
FIG. 87 POWER SPECTRAL DENSITY (802.11B, CH 11)..... 80
FIG. 88 POWER SPECTRAL DENSITY (802.11G, CH 1)..... 80
FIG. 89 POWER SPECTRAL DENSITY (802.11G, CH 6)..... 81
FIG. 90 POWER SPECTRAL DENSITY (802.11G, CH 11)..... 81
FIG. 91 POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 1)..... 82

©Copyright. All rights reserved by TMC Beijing.

FIG. 92 POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 6) 82
FIG. 93 POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 11) 83
FIG. 94 POWER SPECTRAL DENSITY (802.11N-40MHZ, CH 3) 83
FIG. 95 POWER SPECTRAL DENSITY (802.11N-40MHZ, CH 6) 84
FIG. 96 POWER SPECTRAL DENSITY (802.11N-40MHZ, CH 9) 84
FIG. 97 OCCUPIED 6DB BANDWIDTH (802.11B, CH 1) 85
FIG. 98 OCCUPIED 6DB BANDWIDTH (802.11B, CH 6) 85
FIG. 99 OCCUPIED 6DB BANDWIDTH (802.11B, CH 11) 86
FIG. 100 OCCUPIED 6DB BANDWIDTH (802.11G, CH 1) 86
FIG. 101 OCCUPIED 6DB BANDWIDTH (802.11G, CH 6) 87
FIG. 102 OCCUPIED 6DB BANDWIDTH (802.11G, CH 11) 87
FIG. 103 OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 1) 88
FIG. 104 OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 6) 88
FIG. 105 OCCUPIED 6DB BANDWIDTH (802.11N-20MHZ, CH 11) 89
FIG. 106 OCCUPIED 6DB BANDWIDTH (802.11N-40MHZ, CH 3) 89
FIG. 107 OCCUPIED 6DB BANDWIDTH (802.11N-40MHZ, CH 6) 90
FIG. 108 OCCUPIED 6DB BANDWIDTH (802.11N-40MHZ, CH 9) 90
FIG. 109 BAND EDGES (802.11B, CH 1) 91
FIG. 110 BAND EDGES (802.11B, CH 11) 91
FIG. 111 BAND EDGES (802.11G, CH 1) 92
FIG. 112 BAND EDGES (802.11G, CH 11) 92
FIG. 113 BAND EDGES (802.11 N-20MHZ, CH 1) 93
FIG. 114 BAND EDGES (802.11 N-20MHZ, CH 11) 93
FIG. 115 BAND EDGES (802.11 N-40MHZ, CH 3) 94
FIG. 116 BAND EDGES (802.11 N-40MHZ, CH 9) 94
FIG. 117 CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY) 95
FIG. 118 CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-3 GHZ) 95
FIG. 119 CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 3 GHZ-18 GHZ) 96
FIG. 120 CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY) 96
FIG. 121 CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-3 GHZ) 97
FIG. 122 CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 3 GHZ-18 GHZ) 97
FIG. 123 CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY) 98
FIG. 124 CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHZ-3 GHZ) 98
FIG. 125 CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 3 GHZ-18 GHZ) 99
FIG. 126 CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY) 99
FIG. 127 CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHZ-3 GHZ) 100
FIG. 128 CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 3 GHZ-18 GHZ) 100
FIG. 129 CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY) 101
FIG. 130 CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHZ-3 GHZ) 101
FIG. 131 CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 3 GHZ-18 GHZ) 102
FIG. 132 CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY) 102
FIG. 133 CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHZ-3 GHZ) 103
FIG. 134 CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 3 GHZ-18 GHZ) 103
FIG. 135 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, CENTER FREQUENCY) 104

©Copyright. All rights reserved by TMC Beijing.

FIG. 136 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, 30 MHZ-3 GHZ) 104
FIG. 137 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, 3 GHZ-18 GHZ) 105
FIG. 138 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, CENTER FREQUENCY) 105
FIG. 139 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, 30 MHZ-3 GHZ) 106
FIG. 140 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, 3 GHZ-18 GHZ) 106
FIG. 141 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, CENTER FREQUENCY) 107
FIG. 142 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, 30 MHZ-3 GHZ) 107
FIG. 143 CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, 3 GHZ-18 GHZ) 108
FIG. 144 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH3, CENTER FREQUENCY) 108
FIG. 145 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH3, 30 MHZ-3 GHZ) 109
FIG. 146 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH3, 3 GHZ-18 GHZ) 109
FIG. 147 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH6, CENTER FREQUENCY) 110
FIG. 148 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH6, 30 MHZ-3 GHZ) 110
FIG. 149 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH6, 3 GHZ-18 GHZ) 111
FIG. 150 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH9, CENTER FREQUENCY) 111
FIG. 151 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH9, 30 MHZ-3 GHZ) 112
FIG. 152 CONDUCTED SPURIOUS EMISSION (802.11N-40M, CH9, 3 GHZ-18 GHZ) 112
FIG. 153 CONDUCTED SPURIOUS EMISSION (ALL CHANNELS, 18 GHZ-26 GHZ) 113
FIG. 154 RADIATED SPURIOUS EMISSION (802.11B, CH1, 30MHZ-1 GHZ) 113
FIG. 155 RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHZ-18 GHZ) 114
FIG. 156 RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHZ-1 GHZ) 114
FIG. 157 RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHZ-18 GHZ) 115
FIG. 158 RADIATED SPURIOUS EMISSION (802.11B, CH11, 30MHZ-1 GHZ) 115
FIG. 159 RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHZ-18 GHZ) 116
FIG. 160 RADIATED EMISSION POWER (802.11B, CH1, 2380GHZ~2450GHZ) 117
FIG. 161 RADIATED EMISSION POWER (802.11B, CH11, 2450GHZ~2500GHZ) 117
FIG. 162 RADIATED SPURIOUS EMISSION (802.11G, CH1,30MHZ-1 GHZ) 117
FIG. 163 RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHZ-18 GHZ) 118
FIG. 164 RADIATED SPURIOUS EMISSION (802.11G, CH6, 30MHZ-1 GHZ) 118
FIG. 165 RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHZ-18 GHZ) 119
FIG. 166 RADIATED SPURIOUS EMISSION (802.11G, CH11, 30MHZ-1 GHZ) 119
FIG. 167 RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHZ-18 GHZ) 120
FIG. 168 RADIATED EMISSION POWER (802.11G, CH1, 2380GHZ~2450GHZ) 120
FIG. 169 RADIATED EMISSION POWER (802.11G, CH11, 2450GHZ~2500GHZ) 121
FIG. 170 RADIATED SPURIOUS EMISSION (802.11N-20M, CH1, 30MHZ-1 GHZ) 121
FIG. 171 RADIATED SPURIOUS EMISSION (802.11N-20M, CH1, 1 GHZ-18 GHZ) 122
FIG. 172 RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 30MHZ-1 GHZ) 122
FIG. 173 RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 1 GHZ-18 GHZ) 123
FIG. 174 RADIATED SPURIOUS EMISSION (802.11N-20M, CH11, 30MHZ-1 GHZ) 123
FIG. 175 RADIATED SPURIOUS EMISSION (802.11N-20M, CH11, 1 GHZ-18 GHZ) 124
FIG. 176 RADIATED EMISSION POWER (802.11N-20M, CH1, 2380GHZ~2450GHZ) 124
FIG. 177 RADIATED EMISSION POWER (802.11N-20M, CH11, 2450GHZ~2500GHZ) 125
FIG. 178 RADIATED SPURIOUS EMISSION (802.11N-40M, CH3, 30MHZ-1 GHZ) 125
FIG. 179 RADIATED SPURIOUS EMISSION (802.11N-40M, CH3, 1 GHZ-18 GHZ) 126

©Copyright. All rights reserved by TMC Beijing.

FIG. 180 RADIATED SPURIOUS EMISSION (802.11N-40M, CH6, 30MHZ-1 GHZ) 126
FIG. 181 RADIATED SPURIOUS EMISSION (802.11N-40M, CH6, 1 GHZ-18 GHZ) 127
FIG. 182 RADIATED SPURIOUS EMISSION (802.11N-40M, CH9, 30MHZ-1 GHZ) 127
FIG. 183 RADIATED SPURIOUS EMISSION (802.11N-40M, CH9, 1 GHZ-18 GHZ) 128
FIG. 184 RADIATED EMISSION POWER (802.11N-40M, CH3, 2380GHZ~2450GHZ) 128
FIG. 185 RADIATED EMISSION POWER (802.11N-20M, CH9, 2450GHZ~2500GHZ) 129
FIG. 186 RADIATED EMISSION: 18 GHZ - 26 GHZ 129
FIG. 187 AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE2) 130
FIG. 188 AC POWERLINE CONDUCTED EMISSION (IDLE, AE2) 131

©Copyright. All rights reserved by TMC Beijing.

1. Test Laboratory

1.1. Testing Location

Company Name:	TMC Shenzhen, Telecommunication Metrology Center of MIIT
Address:	No. 12 Building, Shangsha Innovation and Technology Park, Futian District, Shenzhen, P. R. China
Postal Code:	518048
Telephone:	+86(0)755-33322000
Fax:	+86(0)755-33322001

1.2. Testing Environment

Normal Temperature:	15℃-30℃
Extreme Temperature:	-20℃/+55℃
Relative Humidity:	30%-60%

1.3. Project data

Project Leader:	Zhang Bojun
Test Engineer:	Tang Weisheng
Testing Start Date:	Oct 27th, 2014
Testing End Date:	Nov 7th, 2014

1.4. Signature

Tang Weisheng

(Prepared this test report)

Zhang Bojun

(Reviewed this test report)

Lu Minniu

Director of the laboratory

(Approved this test report)

©Copyright. All rights reserved by TMC Beijing.

2. Client Information

2.1. Applicant Information

Company Name:	Shenzhen Sang Fei Consumer Communications Co., Ltd.
Address /Post:	11 Science and Technology Road, Shenzhen Hi-tech Industrial Park Nanshan District, Shenzhen, PRC
City:	Shenzhen
Country:	China
E-mail:	Helen.Lin@sangfei.com
Telephone:	0755-26633217
Fax:	0755-26635272

2.2. Manufacturer Information

Company Name:	Shenzhen Sang Fei Consumer Communications Co., Ltd.
Address /Post:	11 Science and Technology Road, Shenzhen Hi-tech Industrial Park Nanshan District, Shenzhen, PRC
City:	Shenzhen
Country:	China
E-mail:	Helen.Lin@sangfei.com
Telephone:	0755-26633217
Fax:	0755-26635272

©Copyright. All rights reserved by TMC Beijing.

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	WCDMA/GSM Digital Mobile Phone
Model Name	Philips S398
Market Name	Philips S398
RF Protocol	IEEE 802.11b/g/n20/n40
Operating Frequency	2412MHz~2462MHz
FCC ID	VQRCTS398

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	WMBUa	S398_M6582K_1443_V01A_AM_FCC

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Battery	AB2040WMC	/
AE2	Charger	A31-500650	/

*AE ID: is used to identify the test accessory in the lab internally.

©Copyright. All rights reserved by TMC Beijing.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct, 2013 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	Jun, 2014

©Copyright. All rights reserved by TMC Beijing.

5. Laboratory Environment

Half-anechoic chamber (11.20 meters×6.10 meters×5.60 meters) did not exceed following limits:

Temperature	Min. = 15 ℃, Max. = 30 ℃
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω
Normalized Site Attenuation (NSA)	< ±3.5dB, with 3m of Measuring distance, 30MHz 1000MHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Fully-anechoic chamber (11.20 meters×6.10 meters×6.60 meters) did not exceed following limits:

Temperature	Min. = 15 ℃, Max. = 30 ℃
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 30MHz to 18 000 MHz

Conduction Lab did not exceed following limits:

Temperature	Min.=15 ℃, Max.=30 ℃
Relative humidity	Min.=30 %, Max.= 60 %
Shielding effectiveness	> 80 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω

©Copyright. All rights reserved by TMC Beijing.

6. Summary of Test Results

6.1. Summary of Test Results

No	Test cases	Sub-clause of Part15C	Verdict
0	Antenna Requirement	15.203	**P**
1	Maximum Peak Output Power	15.247 (b)	**P**
2	Peak Power Spectral Density	15.247 (e)	**P**
3	Occupied 6dB Bandwidth	15.247 (a)	**P**
4	Band Edges Compliance	15.247 (d)	**P**
5	Transmitter Spurious Emission - Conducted	15.247 (d)	**P**
6	Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	**P**
7	AC Powerline Conducted Emission	15.107, 15.207	**P**

6.2. Statements

TMC has evaluated the test cases requested by the applicant/manufacturer as listed in section 6.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2

6.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropical radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

©Copyright. All rights reserved by TMC Beijing.

7. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2015-04-22	1 year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Chamber	FACT5-2.0	4166	ETS-Lindgren	2016-05-29	3 years
2	Test Receiver	ESCI	100701	Rohde & Schwarz	2015-07-30	1 year
3	Spectrum Analyzer	FSP40	100378	Rohde & Schwarz	2014-12-20	1 year
4	BiLog Antenna	VULB9163	9163-329	Schwarzbeck	2017-01-20	3 years
5	Test Receiver	ESCI	100702	Rohde & Schwarz	2015-07-30	1 year
6	LISN	ESH2-Z5	100196	Rohde & Schwarz	2015-01-14	1 year
7	Signal Generator	SMR40	100541	Rohde & Schwarz	2014-12-26	1 year
8	Dual-Ridge Waveguide Horn Antenna	3117	00066577	ETS-Lindgren	2016-04-01	3 years
9	Loop Antenna	HLA6120	35779	TESEQ	2016-02-25	3 years
10	EMI Antenna	3160-09	00118383	ETS-Lindgren	2015-09-05	3 years

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren.

©Copyright. All rights reserved by TMC Beijing.

ANNEX A: EUT photograph

Pic A-1 Mobile phone

Pic A-2 Mobile phone

©Copyright. All rights reserved by TMC Beijing.

Pic A-3 Battery

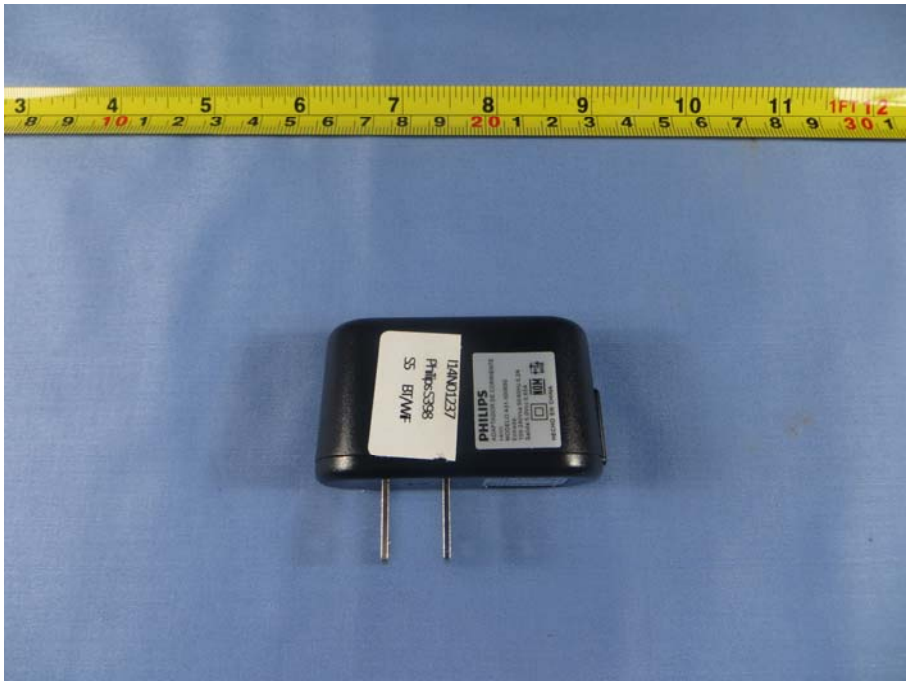

Pic A-4 Charger

©Copyright. All rights reserved by TMC Beijing.

ANNEX B: MEASUREMENT RESULTS

B.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, § 15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion: The Directional gains of antenna used for transmitting is -3.0 dBi.
The RF transmitter uses an integrate antenna without connector.

©Copyright. All rights reserved by TMC Beijing.

B.1 Maximum Average Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)(1)	< 30

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11b	1	Fig.1	13.09	Fig.2	13.68	Fig.3	13.24
	2	Fig.4	13.27	Fig.5	13.63	Fig.6	13.33
	5.5	Fig.7	13.51	Fig.8	13.81	Fig.9	13.49
	11	Fig.10	13.11	Fig.11	13.68	Fig.12	13.55
802.11g	6	Fig.13	10.73	Fig.14	10.68	Fig.15	10.50
	9	Fig.16	10.53	Fig.17	10.72	Fig.18	10.72
	12	Fig.19	10.30	Fig.20	10.70	Fig.21	10.49
	18	Fig.22	10.32	Fig.23	10.75	Fig.24	10.43
	24	Fig.25	10.22	Fig.26	10.64	Fig.27	10.42
	36	Fig.28	10.13	Fig.29	10.30	Fig.30	10.20
	48	Fig.31	10.15	Fig.32	10.33	Fig.33	10.26
	54	Fig.34	10.13	Fig.35	10.30	Fig.36	10.24

©Copyright. All rights reserved by TMC Beijing.

802.11n mode

Mode	Data Rate (MCS Index)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11n (20MHz)	MCS0	Fig.37	10.42	Fig.38	10.65	Fig.39	10.69
	MCS1	Fig.40	10.37	Fig.41	10.65	Fig.42	10.42
	MCS2	Fig.43	10.44	Fig.44	10.69	Fig.45	10.48
	MCS3	Fig.46	10.41	Fig.47	10.65	Fig.48	10.24
	MCS4	Fig.49	10.40	Fig.50	10.61	Fig.51	10.24
	MCS5	Fig.52	10.38	Fig.53	10.63	Fig.54	10.45
	MCS6	Fig.55	10.12	Fig.56	10.85	Fig.57	10.30
	MCS7	Fig.58	10.34	Fig.59	10.57	Fig.60	10.23

Mode	Data Rate (MCS Index)	Test Result (dBm)					
		2422MHz (Ch3)		2437MHz (Ch6)		2452 MHz (Ch9)	
802.11n (40MHz)	MCS0	Fig.61	9.30	Fig.62	9.13	Fig.63	10.38
	MCS1	Fig.64	9.37	Fig.65	9.22	Fig.66	10.61
	MCS2	Fig.67	9.33	Fig.68	9.06	Fig.69	10.30
	MCS3	Fig.70	9.26	Fig.71	9.02	Fig.72	10.47
	MCS4	Fig.73	9.29	Fig.74	9.08	Fig.75	10.22
	MCS5	Fig.76	9.28	Fig.77	9.18	Fig.78	10.17
	MCS6	Fig.79	9.07	Fig.80	9.30	Fig.81	10.45
	MCS7	Fig.82	9.02	Fig.83	9.27	Fig.84	10.39

Conclusion: Pass

©Copyright. All rights reserved by TMC Beijing.

B.2 Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

Measurement Results:

802.11b/g mode

Mode	Channel	Peak Power Spectral Density（dBm）		Conclusion
802.11b	1	Fig.85	-15.23	P
	6	Fig.86	-14.86	P
	11	Fig.87	-14.96	P
802.11g	1	Fig.88	-16.90	P
	6	Fig.89	-16.80	P
	11	Fig.90	-17.19	P

802.11n mode

Mode	Channel	Peak Power Spectral Density(dBm)		Conclusion
802.11n (20MHz)	1	Fig.91	-16.77	P
	6	Fig.92	-16.28	P
	11	Fig.93	-17.28	P
802.11n (40MHz)	3	Fig.94	-19.95	P
	6	Fig.95	-19.97	P
	9	Fig.96	-19.77	P

See ANNEX C for test graphs.

Conclusion: Pass

©Copyright. All rights reserved by TMC Beijing.

B.3 Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results (kHz)		conclusion
802.11b	1	Fig.97	9986	P
	6	Fig.98	9986	P
	11	Fig.99	9682	P
802.11g	1	Fig.100	16411	P
	6	Fig.101	16411	P
	11	Fig.102	16411	P

802.11n mode

Mode	Channel	Test Results (kHz)		conclusion
802.11n (20MHz)	1	Fig.103	17670	P
	6	Fig.104	17626	P
	11	Fig.105	17627	P
802.11n (40MHz)	3	Fig.106	36382	P
	6	Fig.107	36382	P
	9	Fig.108	36382	P

See ANNEX C for test graphs.

Conclusion: Pass

©Copyright. All rights reserved by TMC Beijing.

B.4 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.109	P
	11	Fig.110	P
802.11g	1	Fig.111	P
	11	Fig.112	P

802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.113	P
	11	Fig.114	P
802.11n (40MHz)	3	Fig.115	P
	9	Fig.116	P

See ANNEX C for test graphs.

Conclusion: Pass

©Copyright. All rights reserved by TMC Beijing.

B.5 Transmitter Spurious Emission

B.5.1 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.117	P
		30 MHz-3 GHz	Fig.118	P
		3GHz-18GHz	Fig.119	P
	6	2.437 GHz	Fig.120	P
		30 MHz-3 GHz	Fig.121	P
		3GHz-18GHz	Fig.122	P
	11	2.462 GHz	Fig.123	P
		30 MHz-3 GHz	Fig.124	P
		3GHz-18GHz	Fig.125	P
802.11g	1	2.412 GHz	Fig.126	P
		30 MHz-3 GHz	Fig.127	P
		3GHz-18GHz	Fig.128	P
	6	2.437 GHz	Fig.129	P
		30 MHz-3 GHz	Fig.130	P
		3GHz-18GHz	Fig.131	P
	11	2.462 GHz	Fig.132	P
		30 MHz-3 GHz	Fig.133	P
		3GHz-18GHz	Fig.134	P

©Copyright. All rights reserved by TMC Beijing.

802.11n mode

802.11n (20MHz)	1	2.412 GHz	Fig.135	P
		30 MHz-3 GHz	Fig.136	P
		3GHz-18GHz	Fig.137	P
	6	2.437 GHz	Fig.138	P
		30 MHz-3 GHz	Fig.139	P
		3GHz-18GHz	Fig.140	P
	11	2.462 GHz	Fig.141	P
		30 MHz-3 GHz	Fig.142	P
		3GHz-18GHz	Fig.143	P
802.11n (40MHz)	3	2.422 GHz	Fig.144	P
		30 MHz-3 GHz	Fig.145	P
		3GHz-18GHz	Fig.146	P
	6	2.437 GHz	Fig.147	P
		30 MHz-3 GHz	Fig.148	P
		3GHz-18GHz	Fig.149	P
	9	2.452 GHz	Fig.150	P
		30 MHz-3 GHz	Fig.151	P
		3GHz-18GHz	Fig.152	P
/	All channels	18GHz-26GHz	Fig.153	P

See ANNEX C for test graphs.

Conclusion: Pass

©Copyright. All rights reserved by TMC Beijing.

B.5.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μV/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

©Copyright. All rights reserved by TMC Beijing.

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	30 MHz ~1 GHz	Fig.154	P
		1 GHz ~ 18 GHz	Fig.155	P
	6	30 MHz ~1 GHz	Fig.156	P
		1 GHz ~ 18 GHz	Fig.157	P
	11	30 MHz ~1 GHz	Fig.158	P
		1 GHz ~ 18 GHz	Fig.159	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.160	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.161	P
802.11g	1	30 MHz ~1 GHz	Fig.162	P
		1 GHz ~ 18 GHz	Fig.163	P
	6	30 MHz ~1 GHz	Fig.164	P
		1 GHz ~ 18 GHz	Fig.165	P
	11	30 MHz ~1 GHz	Fig.166	P
		1 GHz ~ 18 GHz	Fig.167	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.168	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.169	P

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (20M)	1	30 MHz ~1 GHz	Fig.170	P
		1 GHz ~ 18 GHz	Fig.171	P
	6	30 MHz ~1 GHz	Fig.172	P
		1 GHz ~ 18 GHz	Fig.173	P
	11	30 MHz ~1 GHz	Fig.174	P
		1 GHz ~ 18 GHz	Fig.175	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.176	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.177	P
802.11n (40M)	3	30 MHz ~1 GHz	Fig.178	P
		1 GHz ~ 18 GHz	Fig.179	P
	6	30 MHz ~1 GHz	Fig.180	P
		1 GHz ~ 18 GHz	Fig.181	P
	9	30 MHz ~1 GHz	Fig.182	P
		1 GHz ~ 18 GHz	Fig.183	P
	Power(CH3)	2.38 GHz ~ 2.45 GHz	Fig.184	P
	Power(CH9)	2.45 GHz ~ 2.5 GHz	Fig.185	P
/	All channels	18 GHz~ 26.5 GHz	Fig.186	P

©Copyright. All rights reserved by TMC Beijing.

802.11b CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14459.000	58.4	H	13.1	15.6	74.0
15063.000	58.5	V	13.2	15.5	74.0
15787.000	59.3	H	14.2	14.7	74.0
16281.000	60.4	V	14.8	13.6	74.0
16619.000	61.3	H	15.1	12.7	74.0
17288.000	60.5	H	15.4	13.5	74.0

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14539.000	45.2	H	12.6	8.8	54.0
15157.000	45.9	H	13.0	8.1	54.0
15784.000	47.7	H	14.2	6.3	54.0
16266.000	48.0	H	14.7	6.0	54.0
16788.000	48.7	H	15.3	5.3	54.0
17288.000	48.5	H	15.4	5.5	54.0

802.11b CH 6(1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14473.000	57.7	V	13.0	16.3	74.0
14947.000	57.7	V	13.7	16.3	74.0
15764.000	59.6	H	14.1	14.4	74.0
16298.000	59.7	H	14.9	14.3	74.0
16855.000	60.4	H	15.7	13.6	74.0
17729.000	59.7	H	15.7	14.3	74.0

©Copyright. All rights reserved by TMC Beijing.

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14447.000	45.2	H	13.1	8.8	54.0
15050.000	45.7	H	13.3	8.3	54.0
15764.000	47.3	H	14.1	6.7	54.0
16332.000	47.5	H	15.0	6.5	54.0
16821.000	48.1	H	15.5	5.9	54.0
17416.000	47.7	H	15.6	6.3	54.0

802.11b CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14167.000	57.4	V	12.5	16.6	74.0
14906.000	57.7	V	13.6	16.3	74.0
15754.000	59.1	V	14.1	14.9	74.0
16292.000	59.6	V	14.8	14.4	74.0
16675.000	59.8	H	14.9	14.2	74.0
17478.000	59.4	V	15.7	14.6	74.0

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14924.125	42.4	H	5.8	9.6	54.0
14973.000	45.6	V	13.8	8.4	54.0
15781.000	47.3	H	14.2	6.7	54.0
16337.000	47.4	H	15.1	6.6	54.0
16826.000	47.9	H	15.5	6.1	54.0
17316.000	47.6	H	15.4	6.4	54.0

©Copyright. All rights reserved by TMC Beijing.

802.11g CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14194.000	57.1	V	12.6	16.9	74.0
14647.000	57.4	V	12.7	16.6	74.0
15760.000	59.6	H	14.1	14.4	74.0
16261.000	59.8	H	14.6	14.2	74.0
16617.000	60.4	V	15.1	13.6	74.0
17406.000	59.9	H	15.6	14.1	74.0

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14460.000	45.0	H	13.1	9.0	54.0
14986.000	45.6	V	13.7	8.4	54.0
15760.000	47.4	H	14.1	6.6	54.0
16314.000	47.4	H	14.9	6.6	54.0
16824.000	47.9	H	15.5	6.1	54.0
17350.000	47.5	H	15.5	6.5	54.0

802.11g CH6 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14442.000	57.4	H	13.2	16.6	74.0
14962.000	57.8	V	13.7	16.2	74.0
15751.000	59.2	H	14.1	14.8	74.0
16273.000	59.7	H	14.7	14.3	74.0
16903.000	60.0	V	15.8	14.0	74.0
17566.000	59.5	H	15.8	14.5	74.0

©Copyright. All rights reserved by TMC Beijing.

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14403.000	45.1	V	13.4	8.9	54.0
15050.000	45.7	H	13.3	8.3	54.0
15777.000	47.3	V	14.2	6.7	54.0
16322.000	47.5	V	15.0	6.5	54.0
16839.000	48.1	H	15.6	5.9	54.0
17401.000	47.7	H	15.6	6.3	54.0

802.11g CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14395.000	58.6	V	13.4	15.4	74.0
14982.000	57.8	H	13.7	16.2	74.0
15701.000	60.3	H	13.9	13.7	74.0
16368.000	59.8	V	15.2	14.2	74.0
16824.000	60.9	H	15.5	13.1	74.0
17432.000	60.3	V	15.6	13.7	74.0

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14456.000	45.3	H	13.1	8.7	54.0
14970.000	45.8	H	13.8	8.2	54.0
15780.000	47.6	H	14.2	6.4	54.0
16237.000	47.9	H	14.5	6.1	54.0
16790.000	48.7	H	15.3	5.3	54.0
17324.000	48.4	H	15.4	5.6	54.0

©Copyright. All rights reserved by TMC Beijing.

802.11n-20MHz CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14212.000	57.5	V	12.7	16.5	74.0
15063.000	58.0	V	13.2	16.0	74.0
15774.000	59.7	V	14.2	14.3	74.0
16299.000	59.8	H	14.9	14.2	74.0
16872.000	61.9	V	15.8	12.1	74.0
17324.000	60.7	H	15.4	13.3	74.0

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14461.000	45.2	V	13.0	8.8	54.0
15178.000	45.9	H	13.1	8.1	54.0
15770.000	47.6	H	14.1	6.4	54.0
16202.000	48.1	H	14.4	5.9	54.0
16785.000	48.7	H	15.3	5.3	54.0
17296.000	48.5	H	15.4	5.5	54.0

802.11n-20MHz CH6 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14518.000	56.8	H	12.7	17.2	74.0
14998.000	58.2	V	13.6	15.8	74.0
15792.000	59.6	H	14.2	14.4	74.0
16495.000	59.4	H	15.3	14.6	74.0
16933.000	60.2	H	15.8	13.8	74.0
17355.000	60.1	V	15.5	13.9	74.0

©Copyright. All rights reserved by TMC Beijing.

Frequency (MHz)	Average (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14452.000	45.1	V	13.1	8.9	54.0
14979.000	45.7	V	13.7	8.3	54.0
15786.000	47.3	V	14.2	6.7	54.0
16322.000	47.3	H	15.0	6.7	54.0
16826.000	48.1	H	15.5	5.9	54.0
17352.000	47.6	H	15.5	6.4	54.0

802.11n-20MHz CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14220.000	57.9	V	12.8	16.1	74.0
15037.000	58.2	H	13.4	15.8	74.0
15839.000	59.6	H	14.4	14.4	74.0
16295.000	59.8	V	14.8	14.2	74.0
16894.000	60.0	H	15.8	14.0	74.0
17332.000	59.2	V	15.5	14.8	74.0

Frequency (MHz)	Average (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14401.000	44.9	V	13.4	9.1	54.0
14978.000	45.6	V	13.8	8.4	54.0
15781.000	47.2	V	14.2	6.8	54.0
16296.000	47.2	H	14.8	6.8	54.0
16821.000	47.8	H	15.5	6.2	54.0
17434.000	47.6	H	15.6	6.4	54.0

©Copyright. All rights reserved by TMC Beijing.

802.11n-40MHz CH3 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14168.000	56.8	V	12.5	17.2	74.0
15159.000	58.0	H	13.0	16.0	74.0
15711.000	59.1	V	13.9	14.9	74.0
16230.000	59.7	H	14.5	14.3	74.0
16919.000	60.3	H	15.8	13.7	74.0
17382.000	60.6	H	15.5	13.4	74.0

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14449.000	45.1	H	13.1	8.9	54.0
15052.000	45.7	H	13.3	8.3	54.0
15776.000	47.4	H	14.2	6.6	54.0
16230.000	47.7	H	14.5	6.3	54.0
16826.000	48.4	H	15.5	5.6	54.0
17416.000	48.0	H	15.6	6.0	54.0

802.11n-40MHz CH6 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14432.000	57.1	V	13.2	16.9	74.0
14949.000	58.2	H	13.7	15.8	74.0
15772.000	60.0	V	14.1	14.0	74.0
16509.000	59.6	V	15.3	14.4	74.0
16722.000	60.6	H	14.9	13.4	74.0
17457.000	60.6	H	15.6	13.4	74.0

©Copyright. All rights reserved by TMC Beijing.

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14402.000	45.0	H	13.4	9.0	54.0
15046.000	45.9	H	13.3	8.1	54.0
15776.000	47.3	H	14.2	6.7	54.0
16248.000	47.7	H	14.6	6.3	54.0
16790.000	48.4	H	15.3	5.6	54.0
17383.000	47.9	H	15.5	6.1	54.0

802.11n-40MHz CH9 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14363.000	56.7	H	13.3	17.3	74.0
14765.000	57.4	V	13.2	16.6	74.0
15696.000	58.7	V	13.9	15.3	74.0
16263.000	59.3	H	14.7	14.7	74.0
16863.000	60.1	H	15.7	13.9	74.0
17270.000	59.5	V	15.4	14.5	74.0

Frequency (MHz)	Average (dBµV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
14392.000	44.8	H	13.4	9.2	54.0
14973.000	45.4	H	13.8	8.6	54.0
15786.000	47.1	H	14.2	6.9	54.0
16299.000	47.1	H	14.9	6.9	54.0
16849.000	47.8	H	15.6	6.2	54.0
17416.000	47.2	H	15.6	6.8	54.0

©Copyright. All rights reserved by TMC Beijing.

See ANNEX C for test graphs.

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result=P_{Mea}+$A_{Rpl=}$ P_{Mea}+Cable Loss+Antenna Factor

©Copyright. All rights reserved by TMC Beijing.

B.6 AC Powerline Conducted Emission

Test Condition:

Voltage（V）	Frequency（Hz）
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)-AE2

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.187	Fig.188	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

WLAN (Average Limit)-AE2

Frequency range (MHz)	Average-peak Limit (dBμV)	Result (dBμV)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.187	Fig.188	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

See ANNEX C for test graphs.

Conclusion: Pass

©Copyright. All rights reserved by TMC Beijing.

ANNEX C: TEST FIGURE LIST

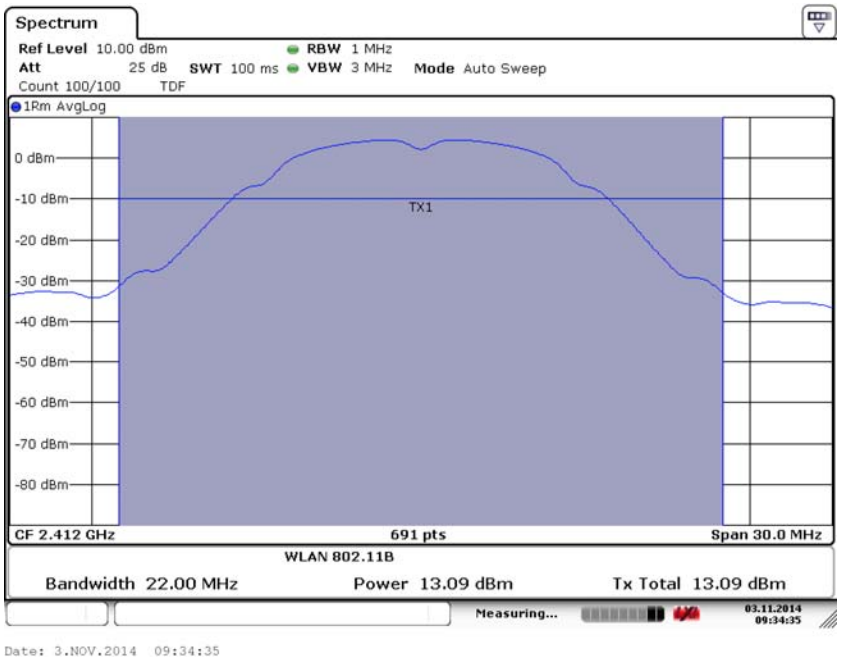

Fig. 1 Maximum Average Output Power (802.11b, Ch 1,1Mbps)

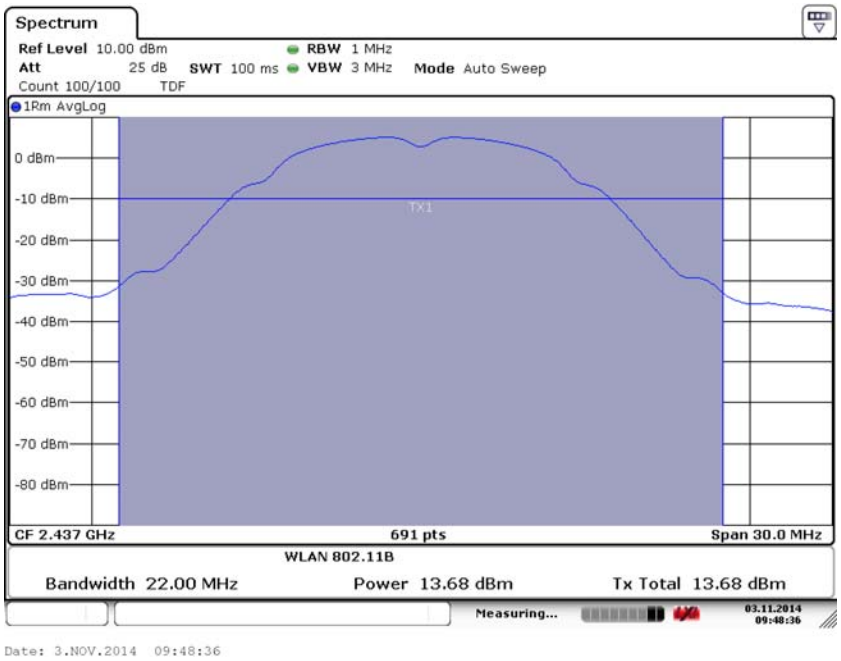

Fig. 2 Maximum Average Output Power (802.11b, Ch 6,1Mbps)

©Copyright. All rights reserved by TMC Beijing.

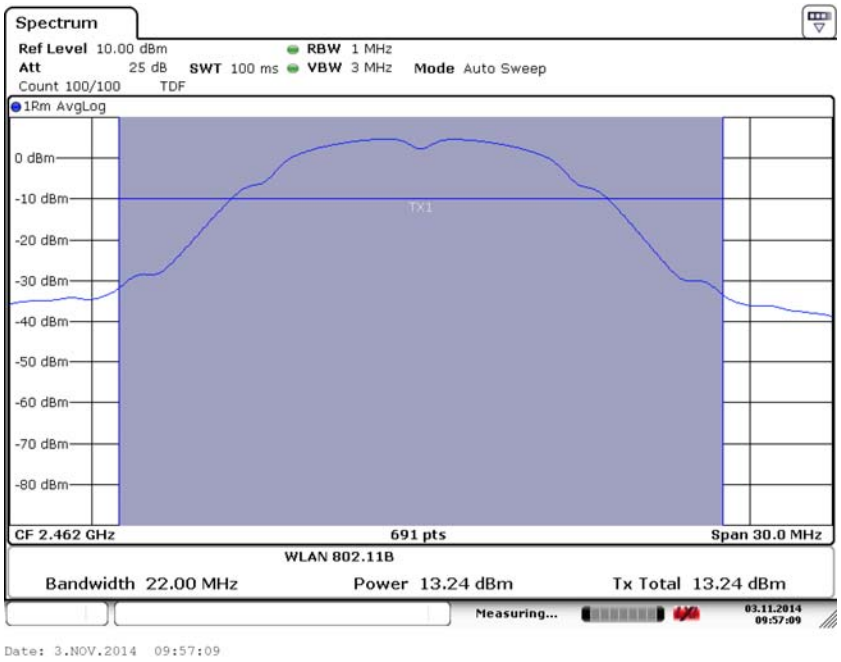

Fig. 3 Maximum Average Output Power (802.11b, Ch 11,1Mbps)

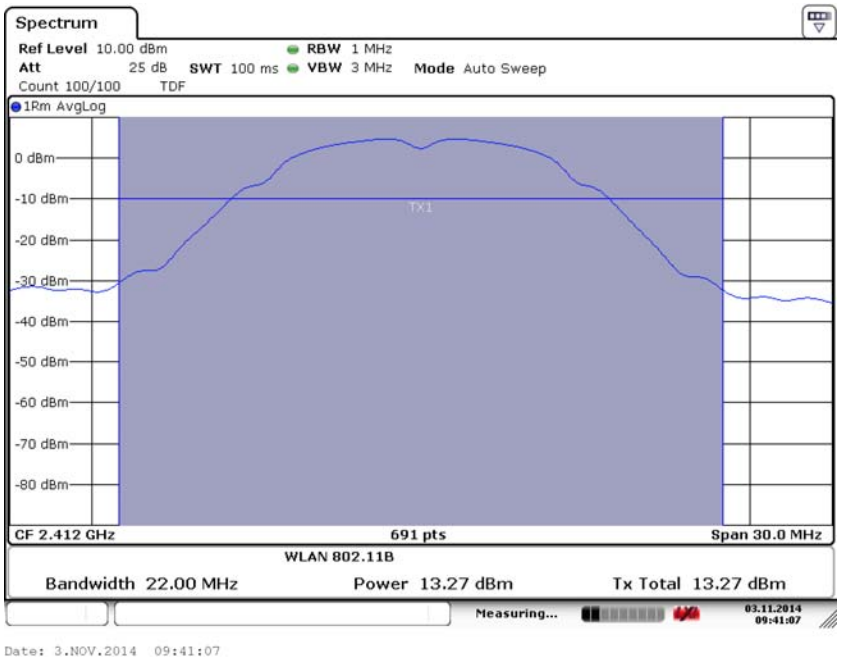

Fig. 4 Maximum Average Output Power (802.11b, Ch 1,2Mbps)

©Copyright. All rights reserved by TMC Beijing.

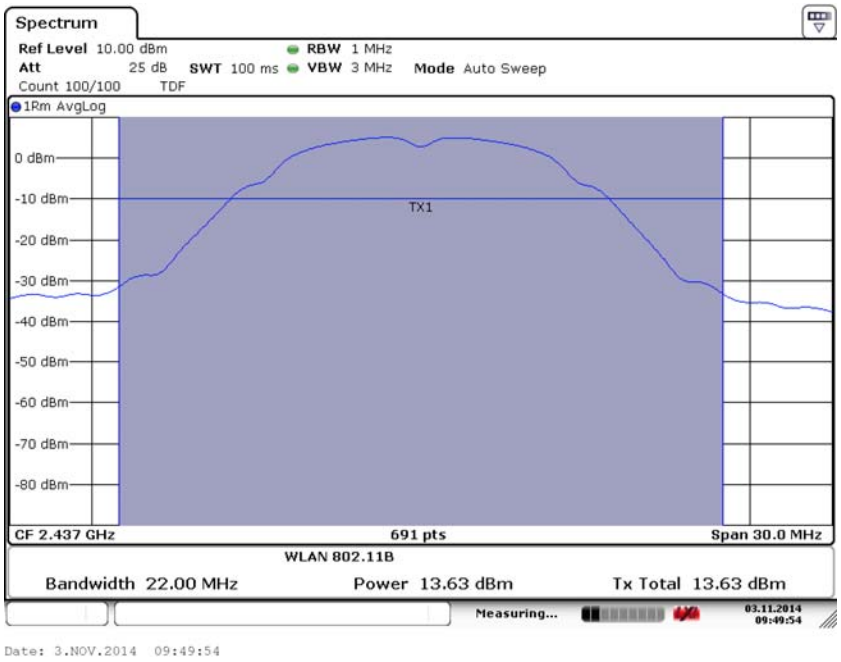

Fig. 5 Maximum Average Output Power (802.11b, Ch 6,2Mbps)

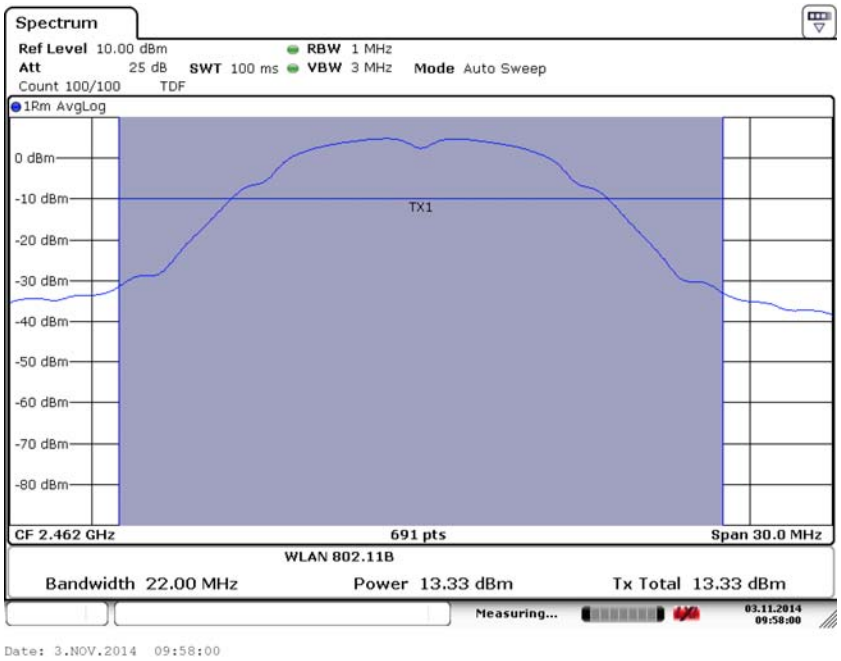

Fig. 6 Maximum Average Output Power (802.11b, Ch 11,2Mbps)

©Copyright. All rights reserved by TMC Beijing.

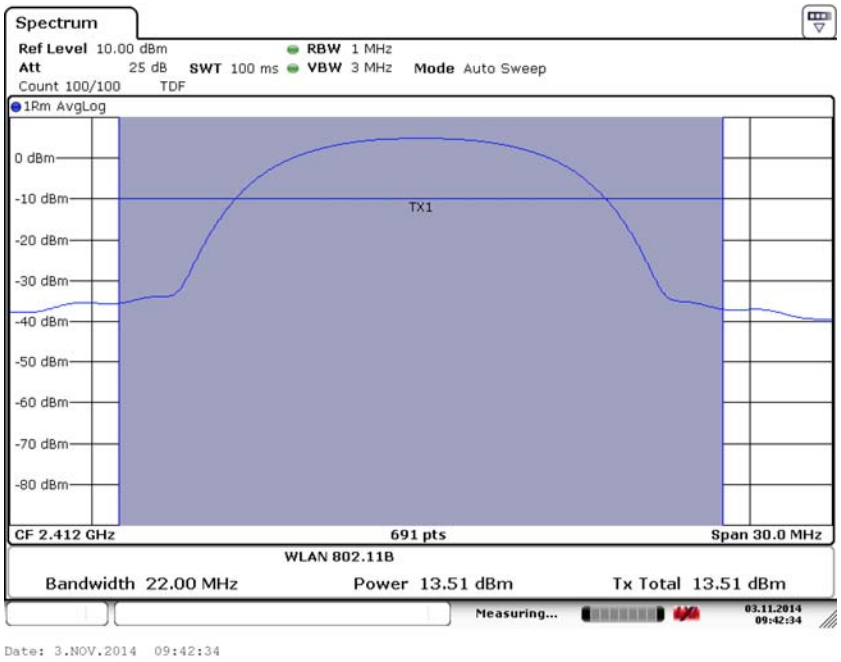

Fig. 7 Maximum Average Output Power (802.11b, Ch 1,5.5Mbps)

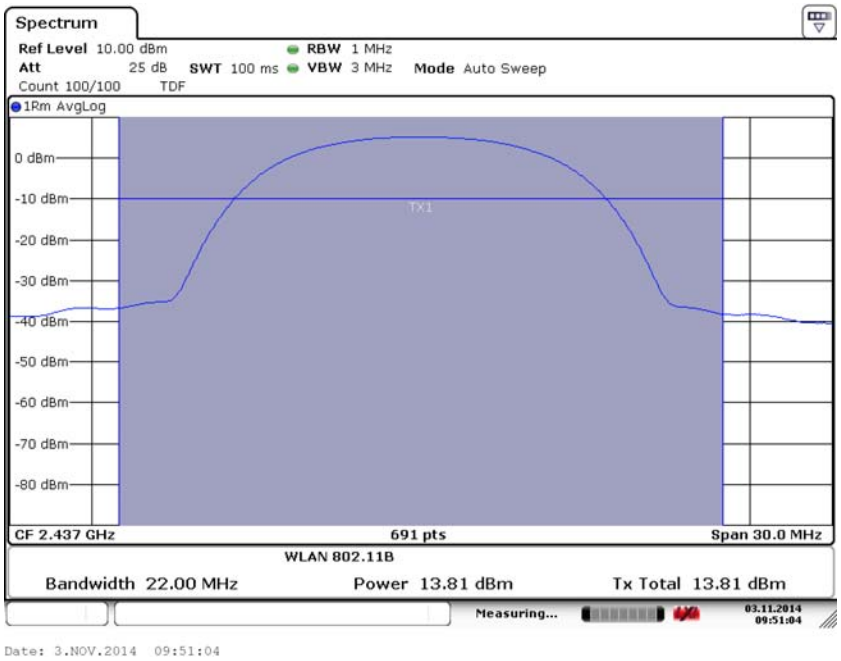

Fig. 8 Maximum Average Output Power (802.11b, Ch 6,5.5Mbps)

©Copyright. All rights reserved by TMC Beijing.

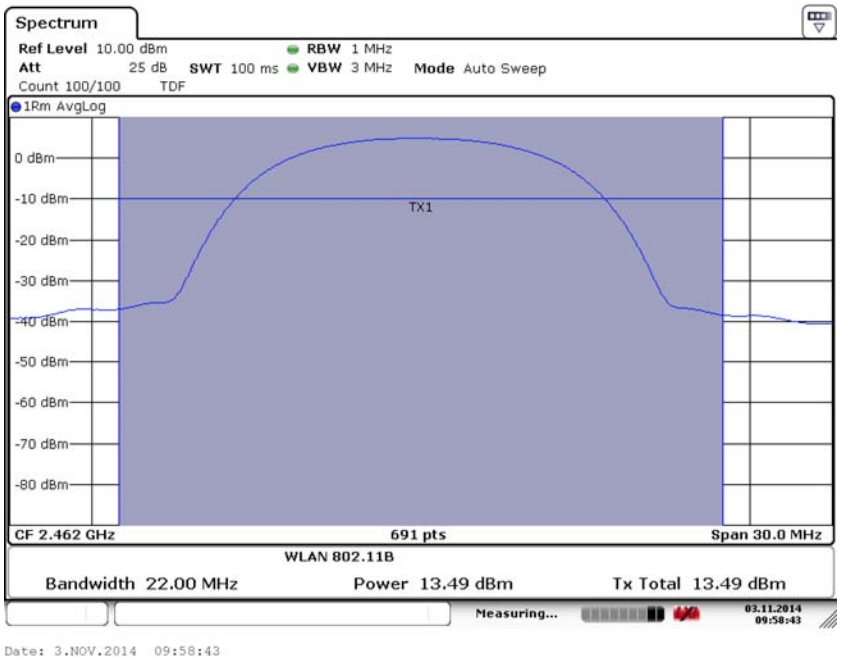

Fig. 9 Maximum Average Output Power (802.11b, Ch 11,5.5Mbps)

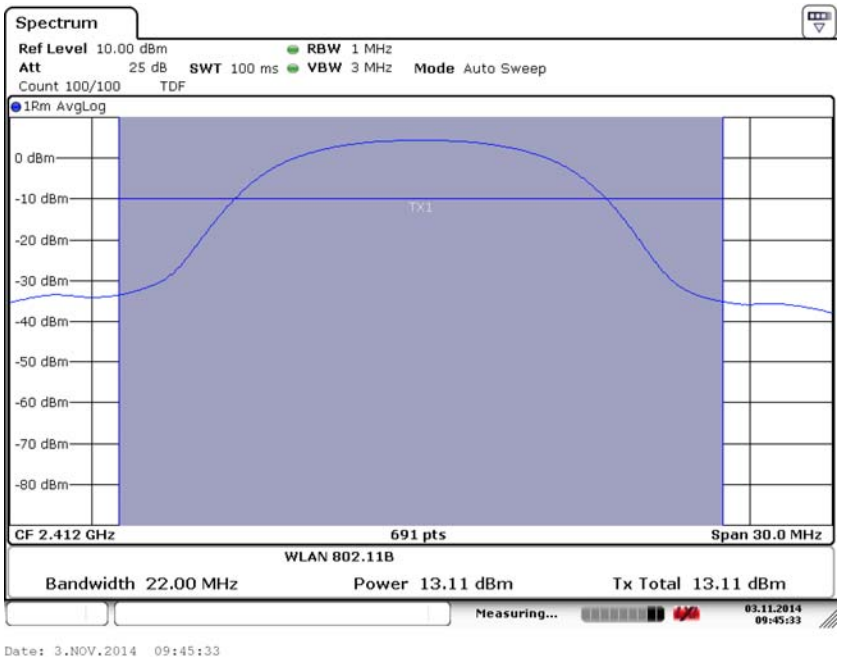

Fig. 10 Maximum Average Output Power (802.11b, Ch 1,11Mbps)

©Copyright. All rights reserved by TMC Beijing.

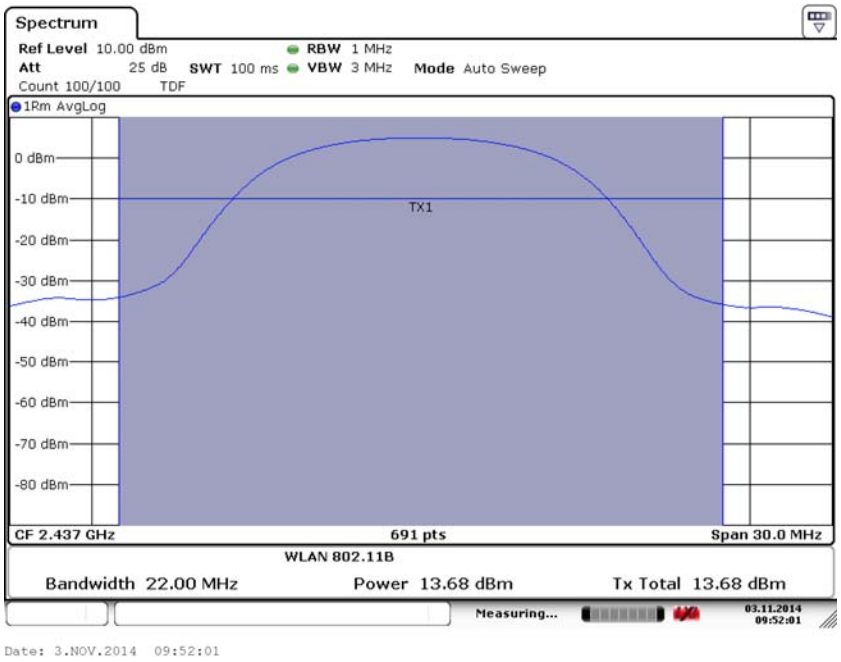

Fig. 11 Maximum Average Output Power (802.11b, Ch 6,11Mbps)

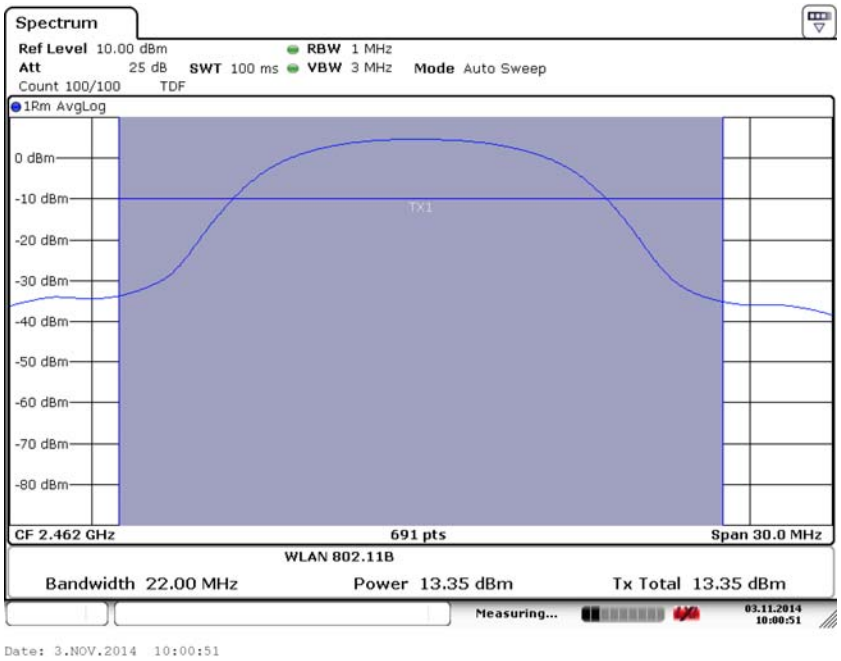

Fig. 12 Maximum Average Output Power (802.11b, Ch 11,11Mbps)

©Copyright. All rights reserved by TMC Beijing.

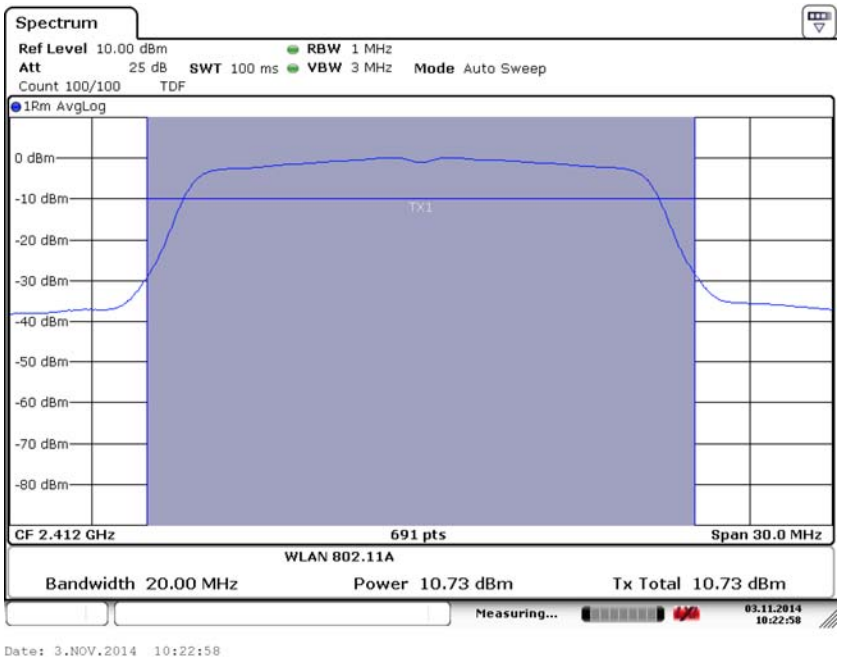

Fig. 13 Maximum Average Output Power (802.11g, Ch 1,6Mbps)

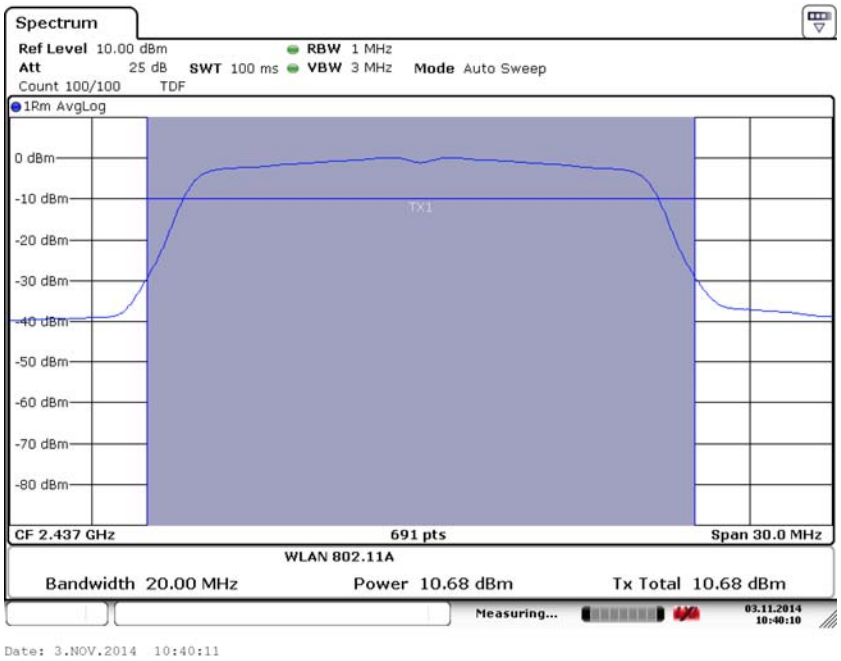

Fig. 14 Maximum Average Output Power (802.11g, Ch 6,6Mbps)

©Copyright. All rights reserved by TMC Beijing.

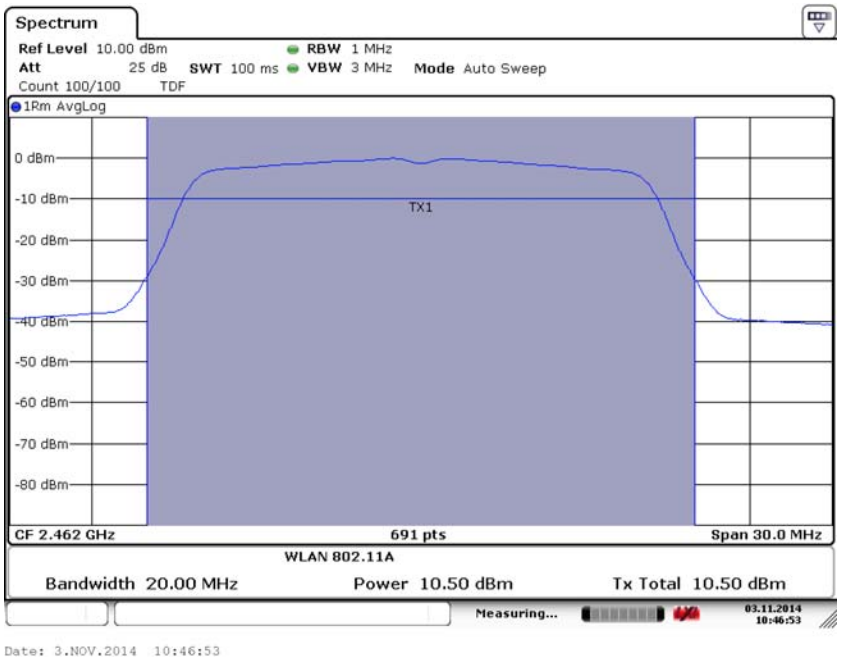

Fig. 15 Maximum Average Output Power (802.11g, Ch 11,6Mbps)

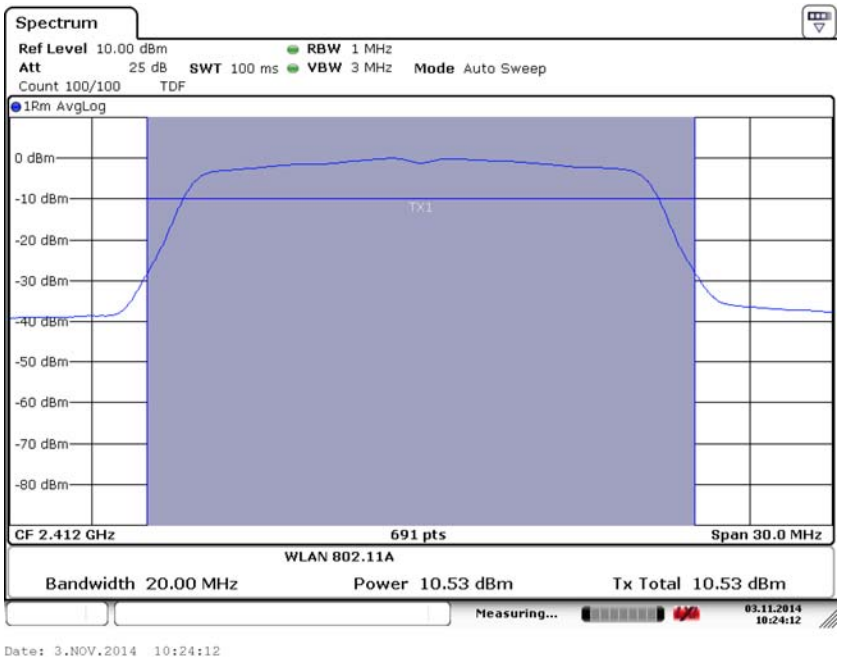

Fig. 16 Maximum Average Output Power (802.11g, Ch 1,9Mbps)

©Copyright. All rights reserved by TMC Beijing.

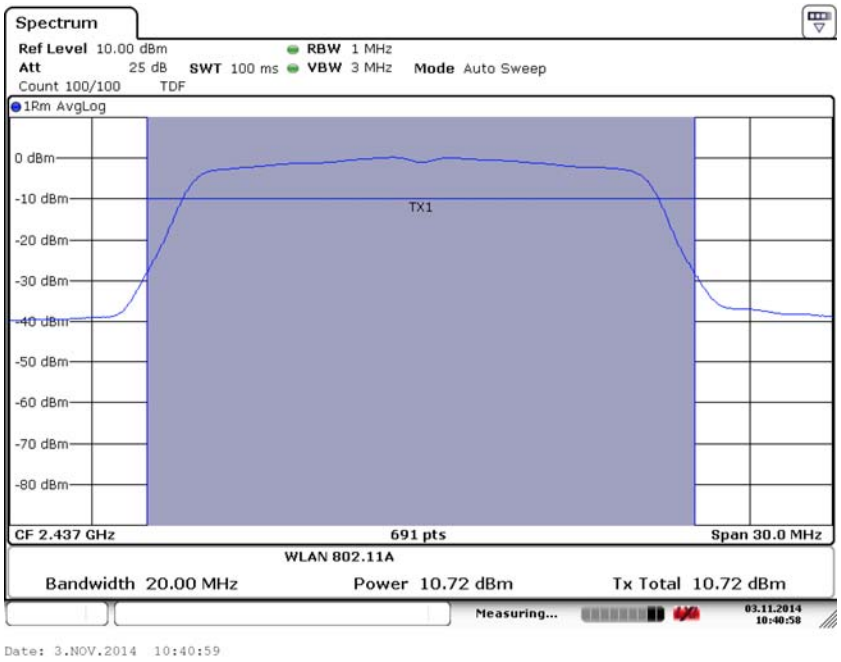

Fig. 17 Maximum Average Output Power (802.11g, Ch 6,9Mbps)

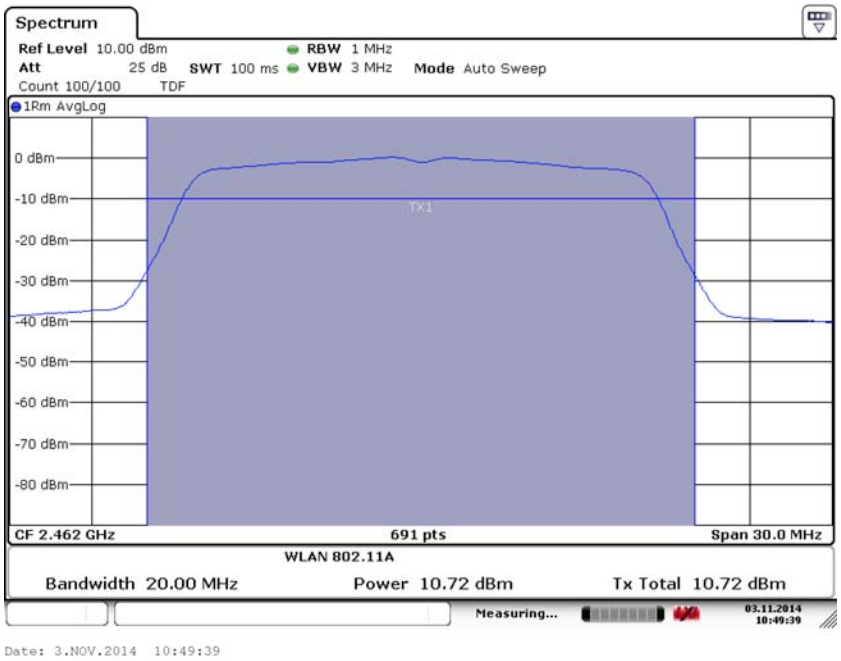

Fig. 18 Maximum Average Output Power (802.11g, Ch 11,9Mbps)

©Copyright. All rights reserved by TMC Beijing.

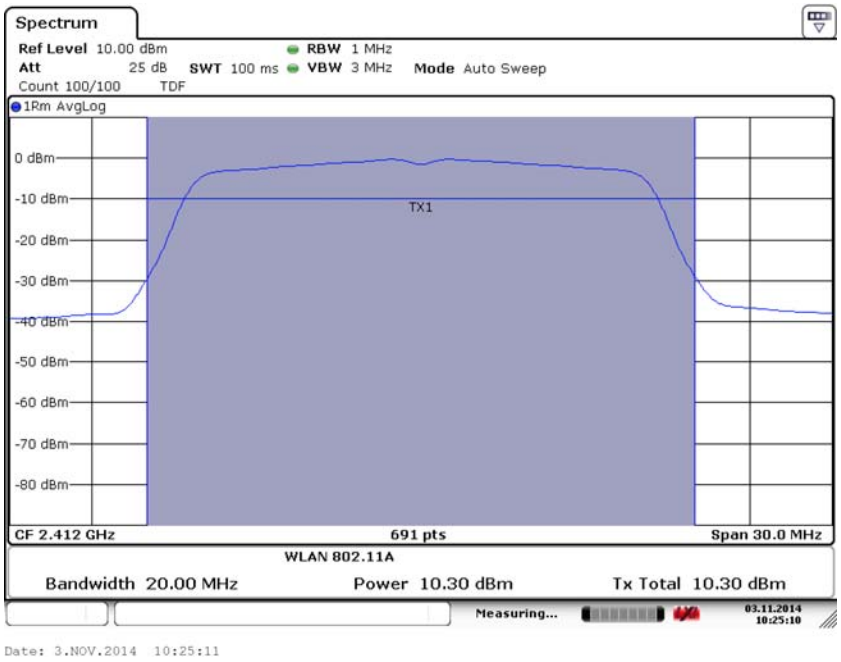

Fig. 19 Maximum Average Output Power (802.11g, Ch 1,12Mbps)

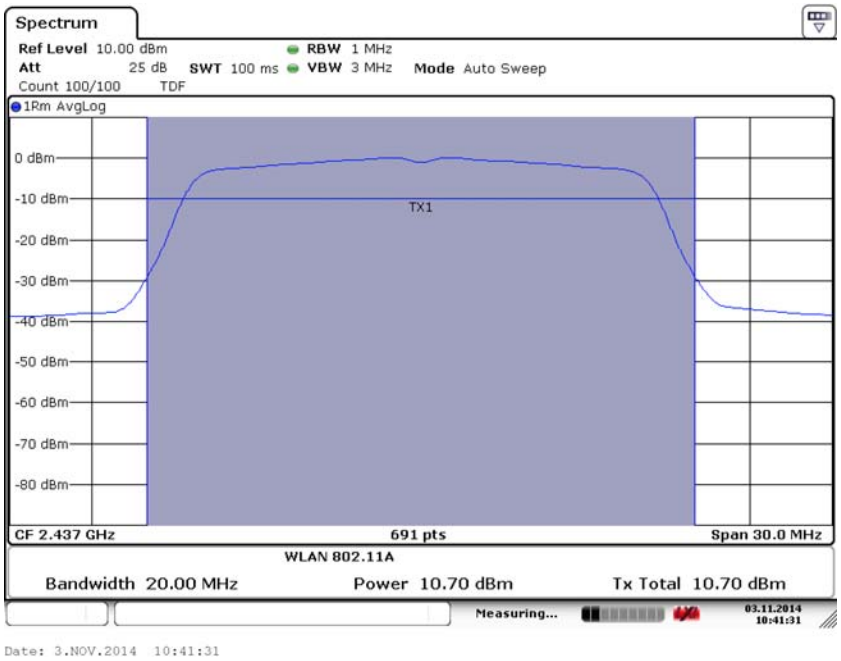

Fig. 20 Maximum Average Output Power (802.11g, Ch 6,12Mbps)

©Copyright. All rights reserved by TMC Beijing.

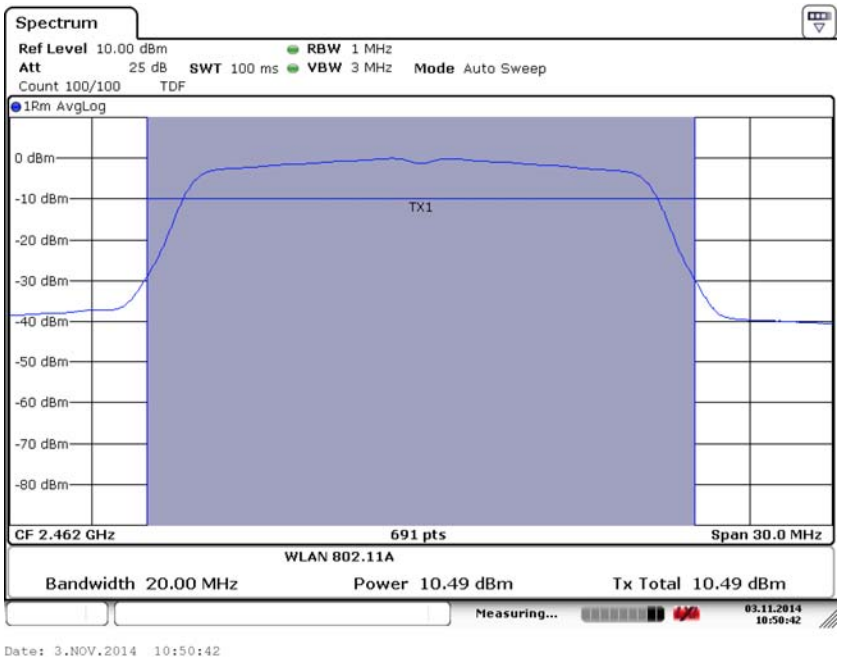

Fig. 21 Maximum Average Output Power (802.11g, Ch 11,12Mbps)

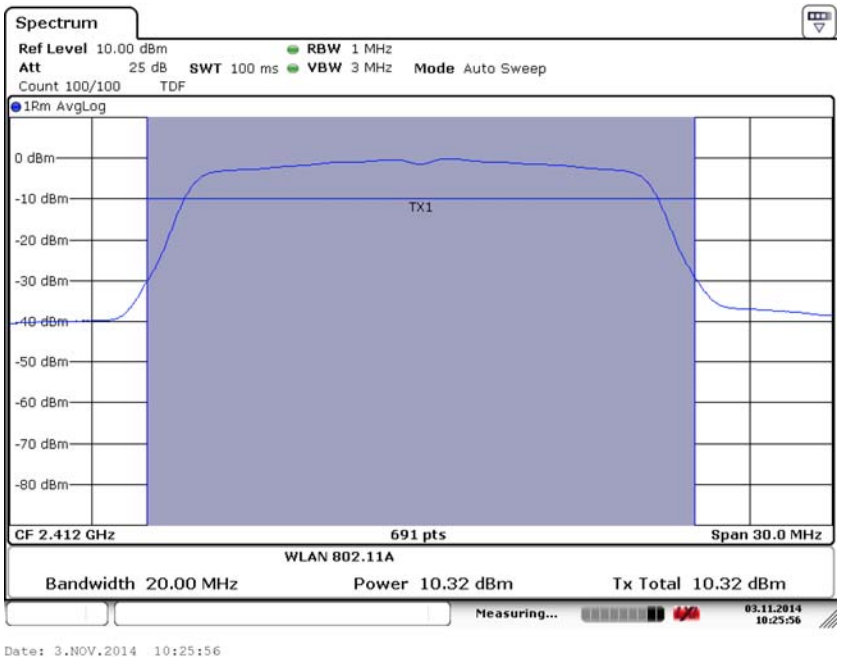

Fig. 22 Maximum Average Output Power (802.11g, Ch 1,18Mbps)

©Copyright. All rights reserved by TMC Beijing.

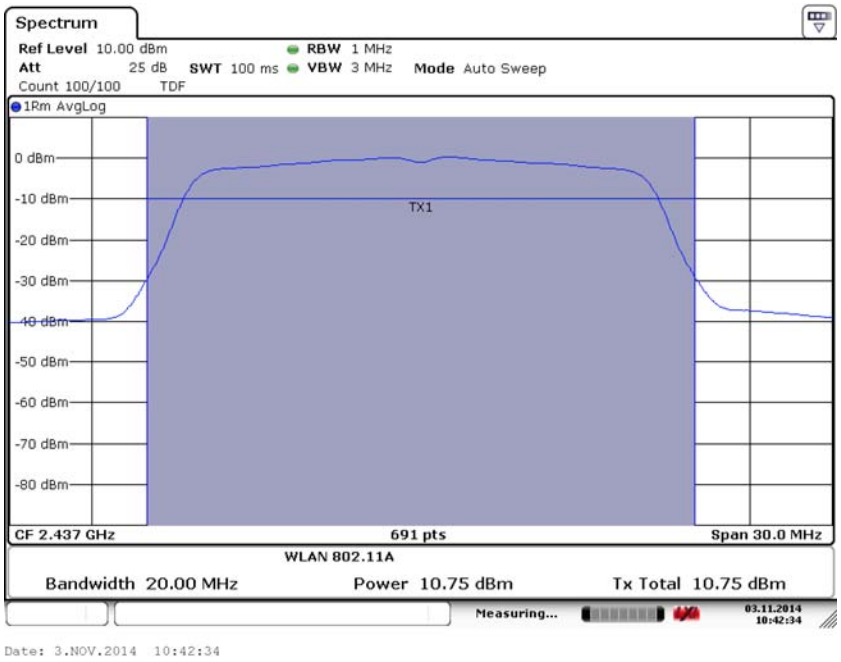

Fig. 23 Maximum Average Output Power (802.11g, Ch 6,18Mbps)

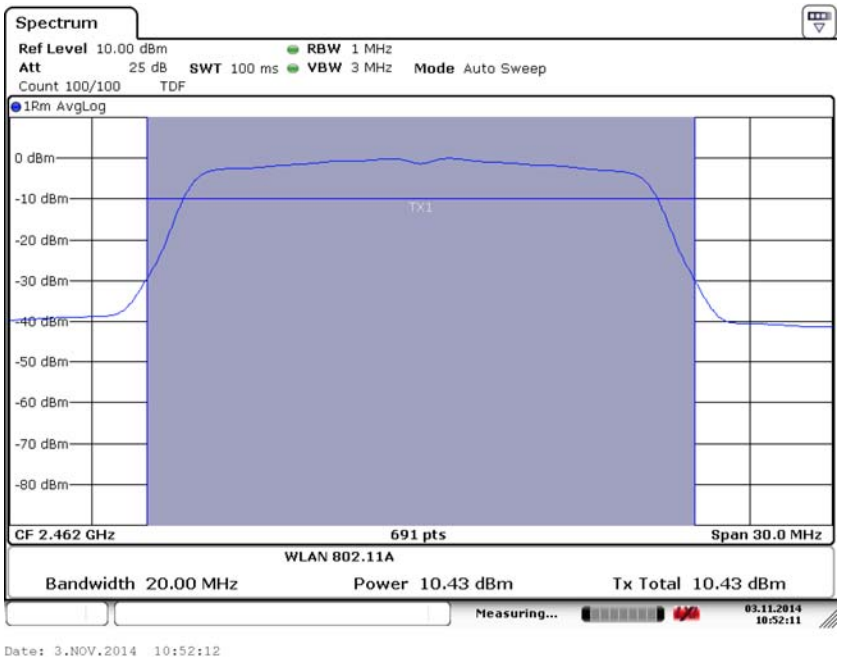

Fig. 24 Maximum Average Output Power (802.11g, Ch 11,18Mbps)

©Copyright. All rights reserved by TMC Beijing.

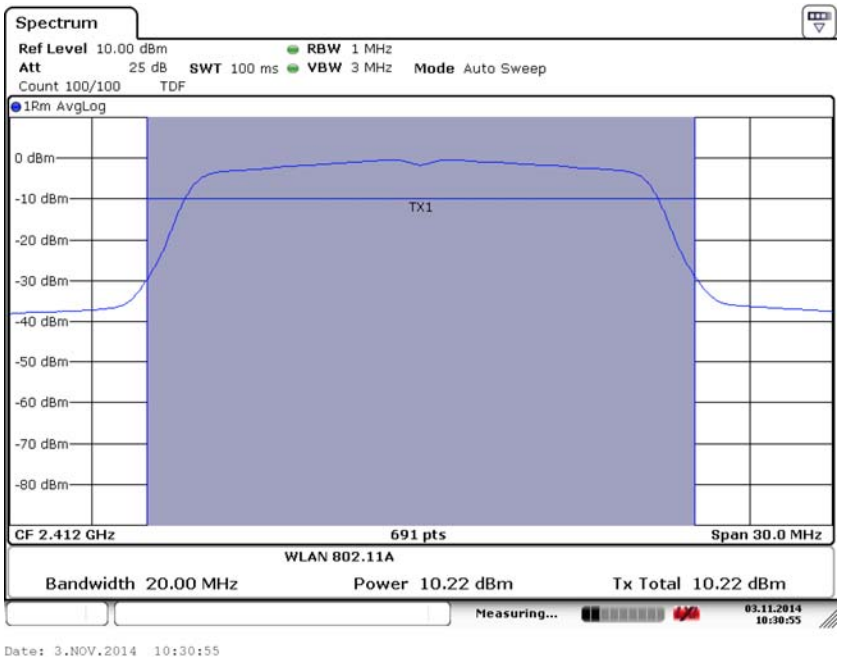

Fig. 25 Maximum Average Output Power (802.11g, Ch 1,24Mbps)

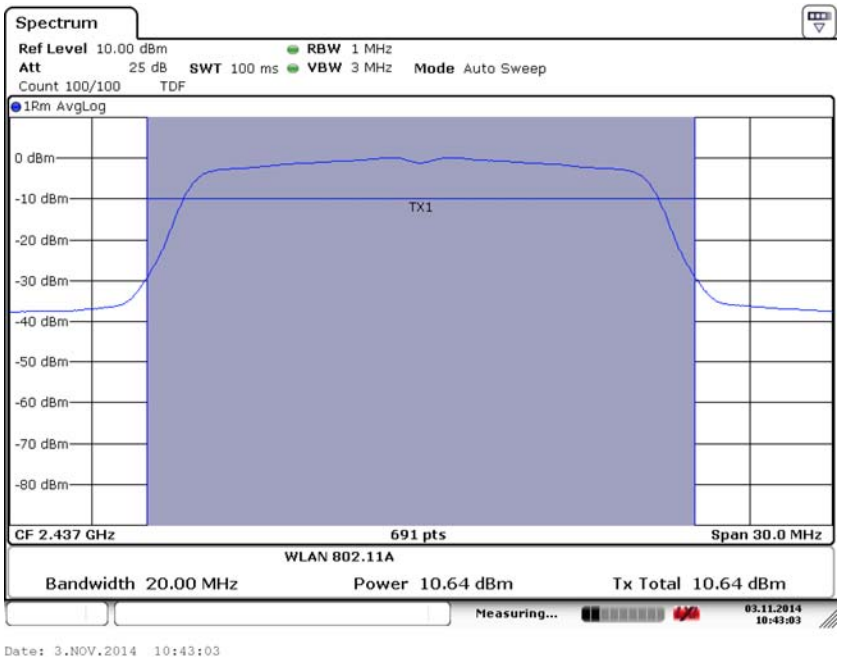

Fig. 26 Maximum Average Output Power (802.11g, Ch 6,24Mbps)

©Copyright. All rights reserved by TMC Beijing.

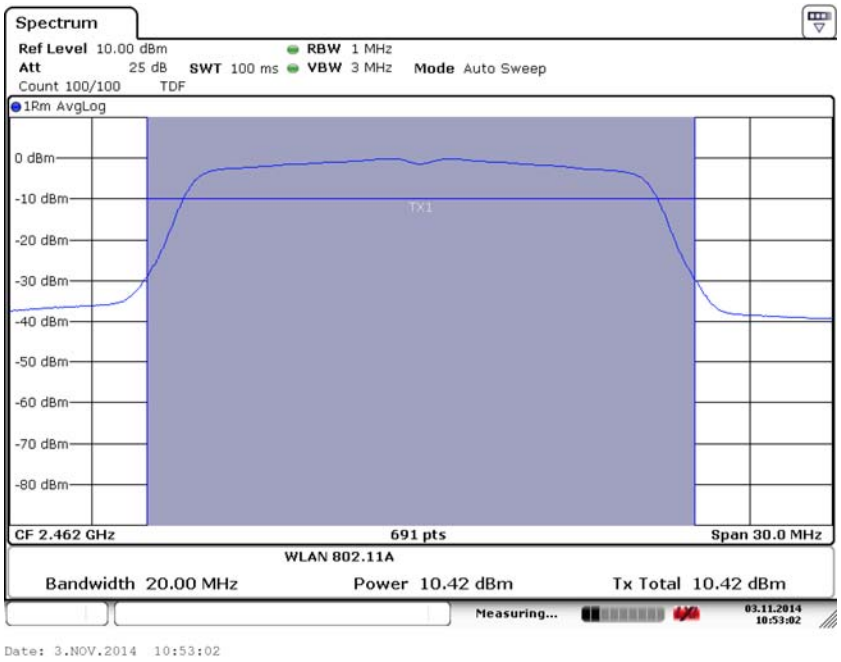

Fig. 27 Maximum Average Output Power (802.11g, Ch 11,24Mbps)

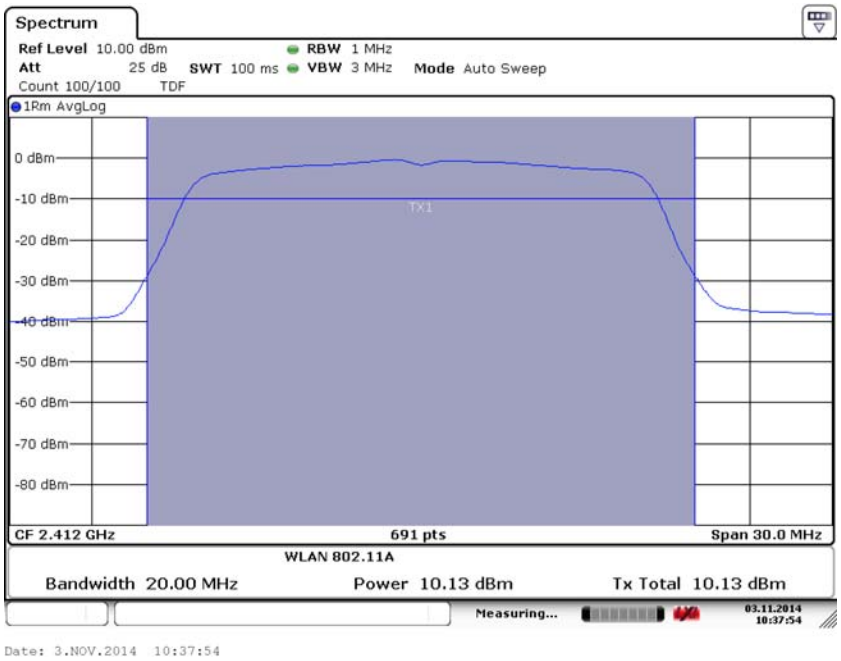

Fig. 28 Maximum Average Output Power (802.11g, Ch 1,36Mbps)

©Copyright. All rights reserved by TMC Beijing.

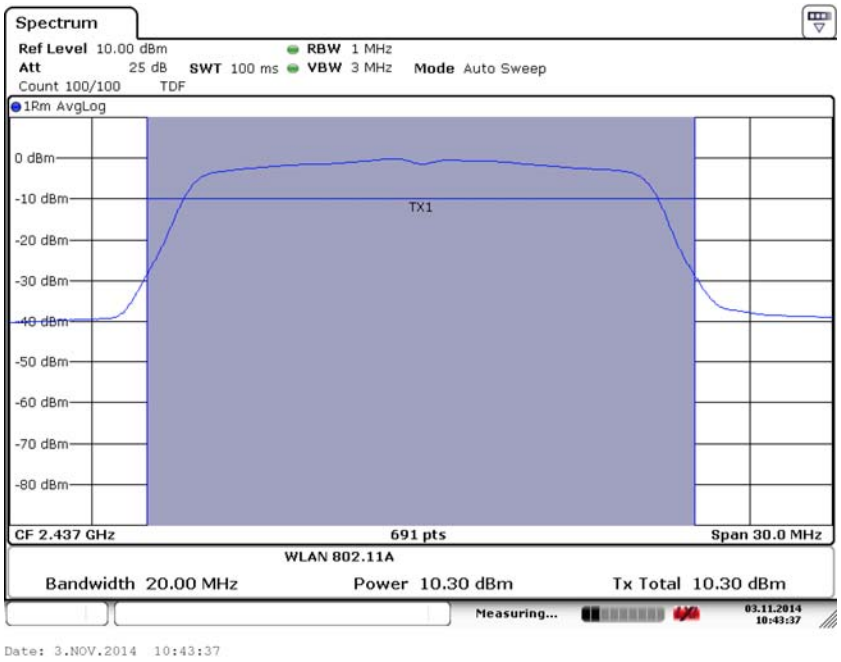

Fig. 29 Maximum Average Output Power (802.11g, Ch 6,36Mbps)

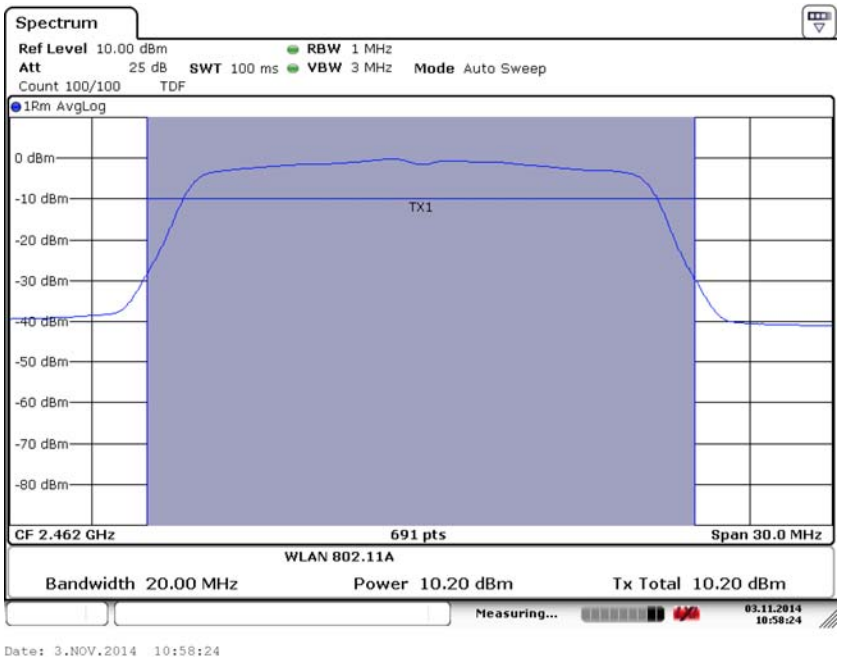

Fig. 30 Maximum Average Output Power (802.11g, Ch 11,36Mbps)

©Copyright. All rights reserved by TMC Beijing.

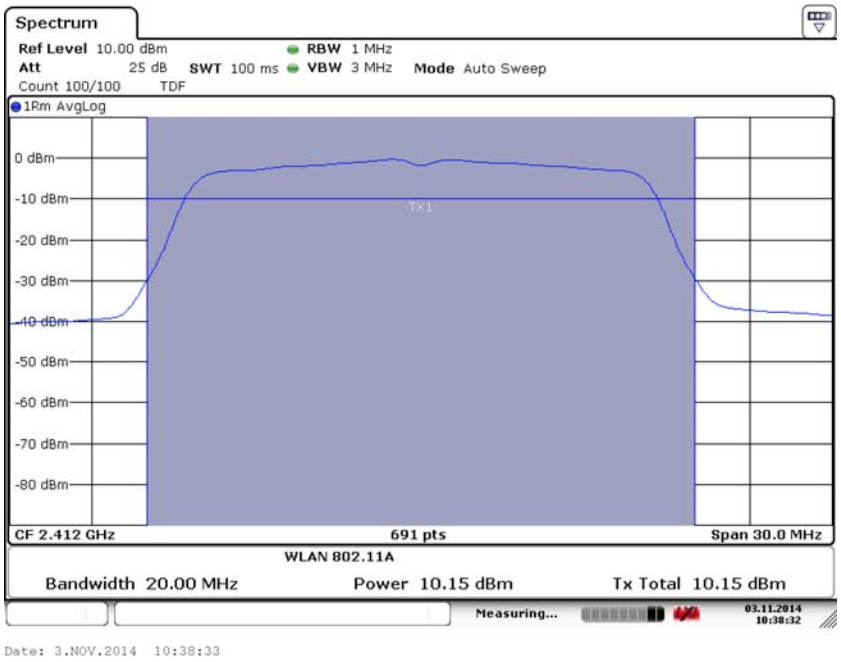

Fig. 31 Maximum Average Output Power (802.11g, Ch 1,48Mbps)

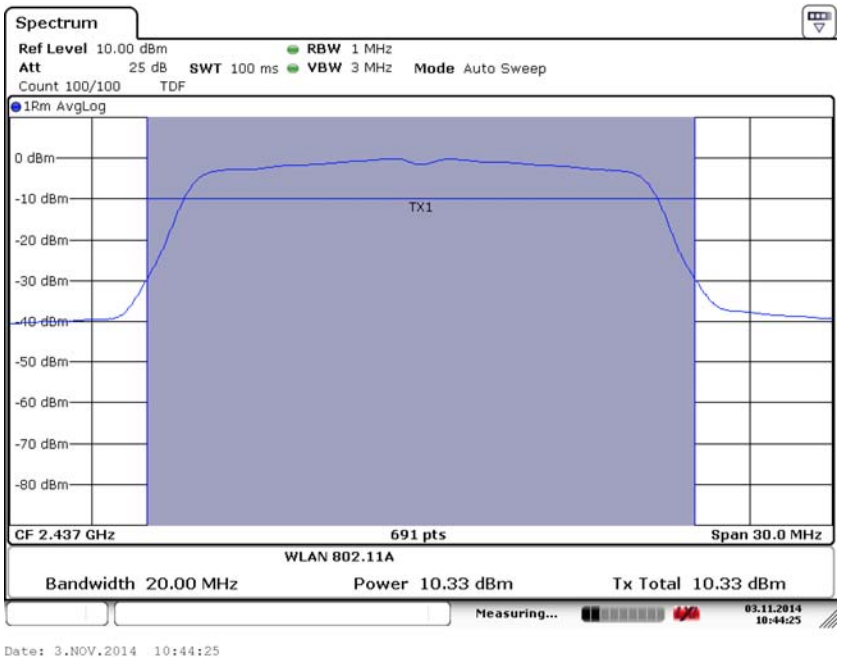

Fig. 32 Maximum Average Output Power (802.11g, Ch 6,48Mbps)

©Copyright. All rights reserved by TMC Beijing.

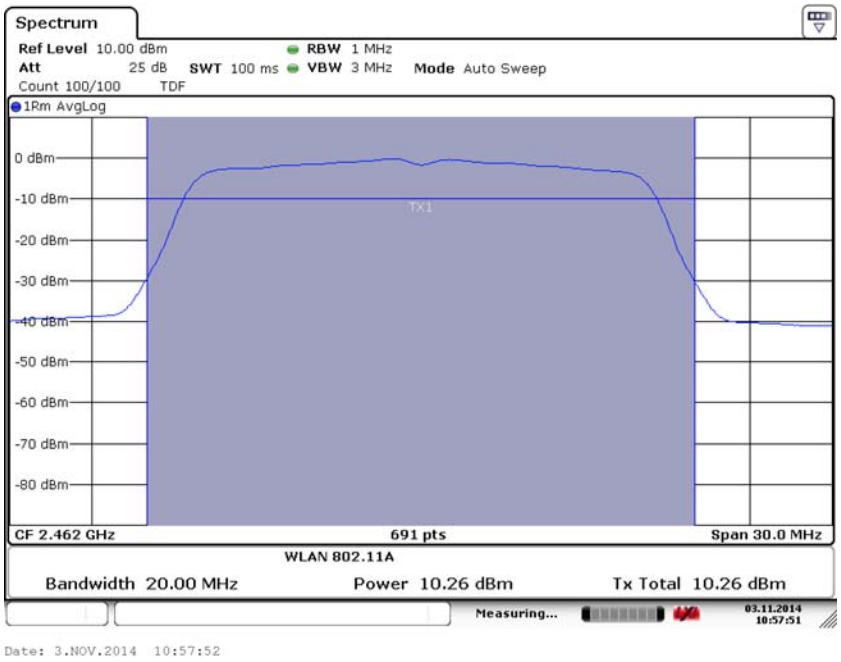

Fig. 33 Maximum Average Output Power (802.11g, Ch 11,48Mbps)

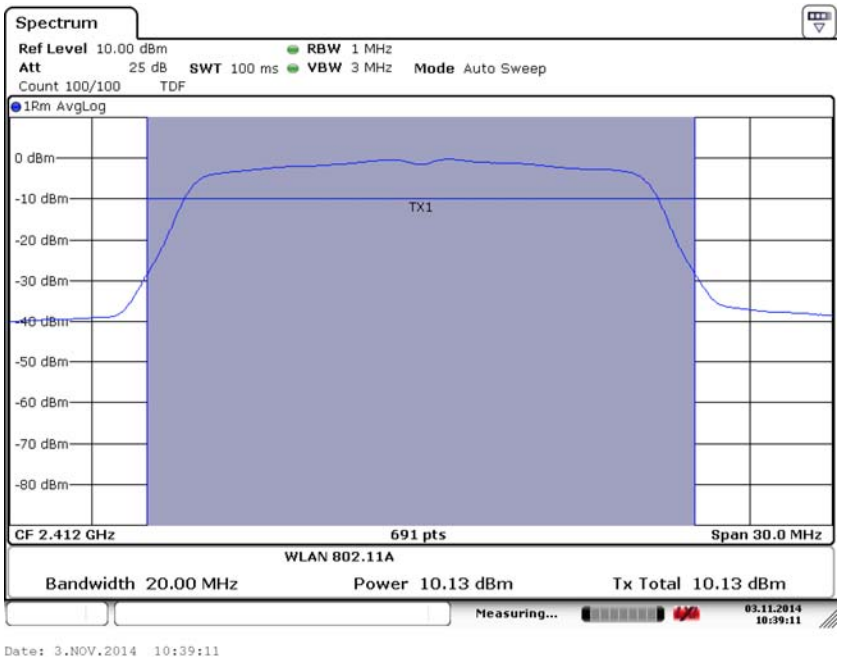

Fig. 34 Maximum Average Output Power (802.11g, Ch 1,54Mbps)

©Copyright. All rights reserved by TMC Beijing.

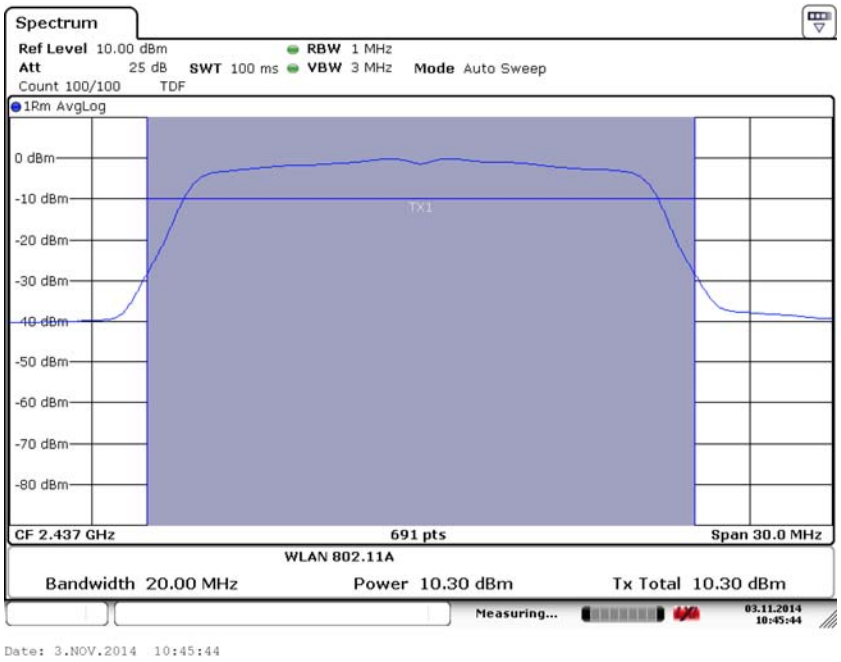

Fig. 35 Maximum Average Output Power (802.11g, Ch 6,54Mbps)

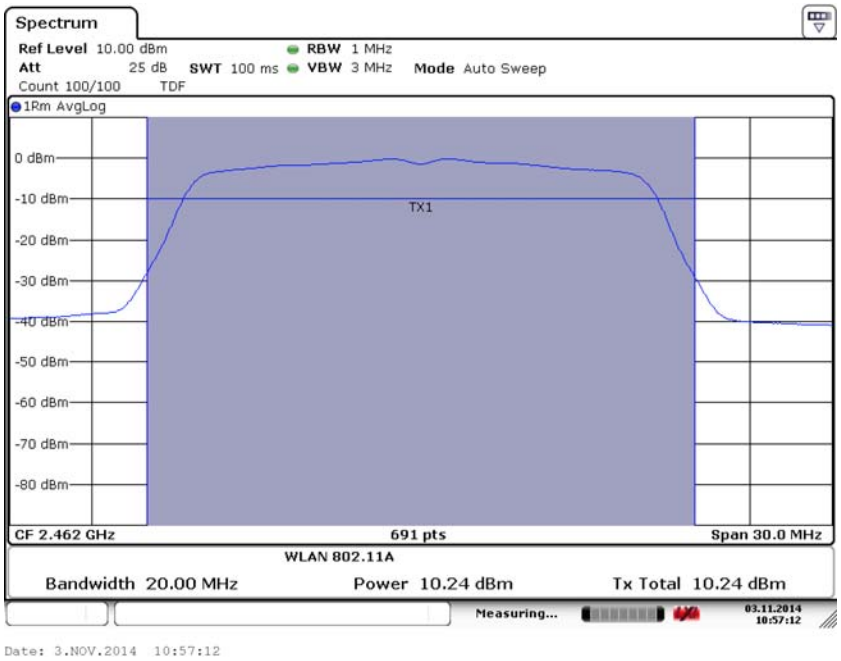

Fig. 36 Maximum Average Output Power (802.11g, Ch 11,54Mbps)

©Copyright. All rights reserved by TMC Beijing.

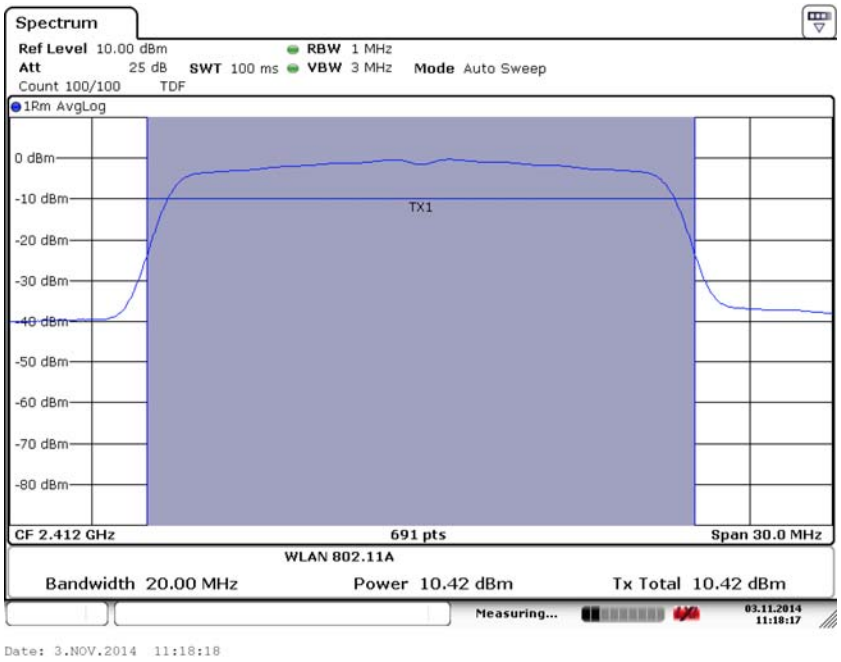

Fig. 37 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS0)

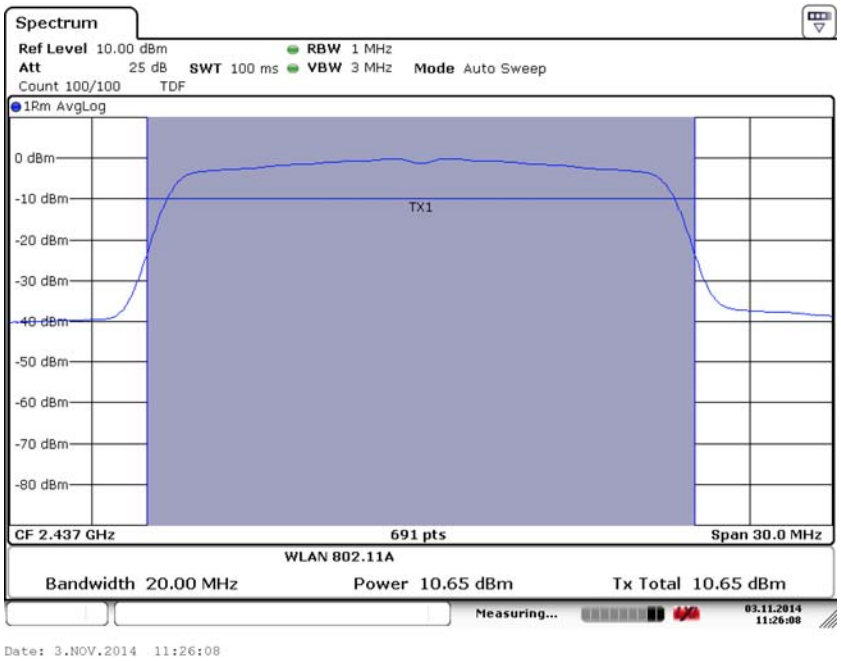

Fig. 38 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS0)

©Copyright. All rights reserved by TMC Beijing.

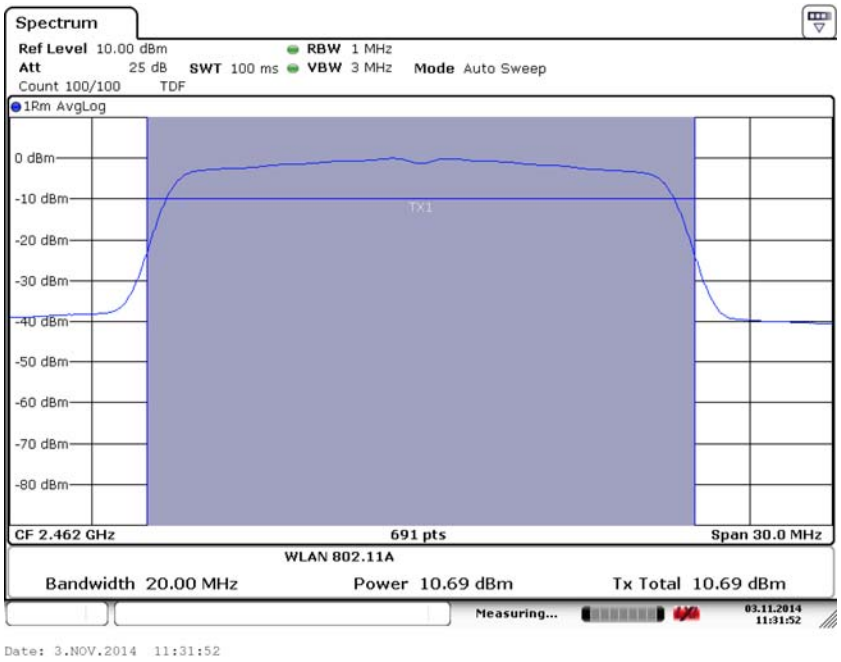

Fig. 39 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS0)

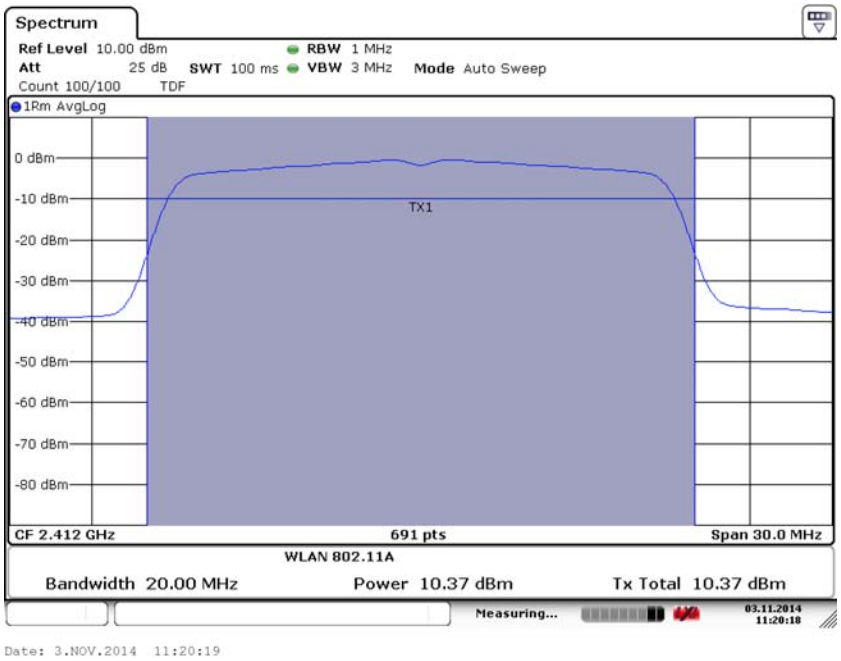

Fig. 40 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS1)

©Copyright. All rights reserved by TMC Beijing.

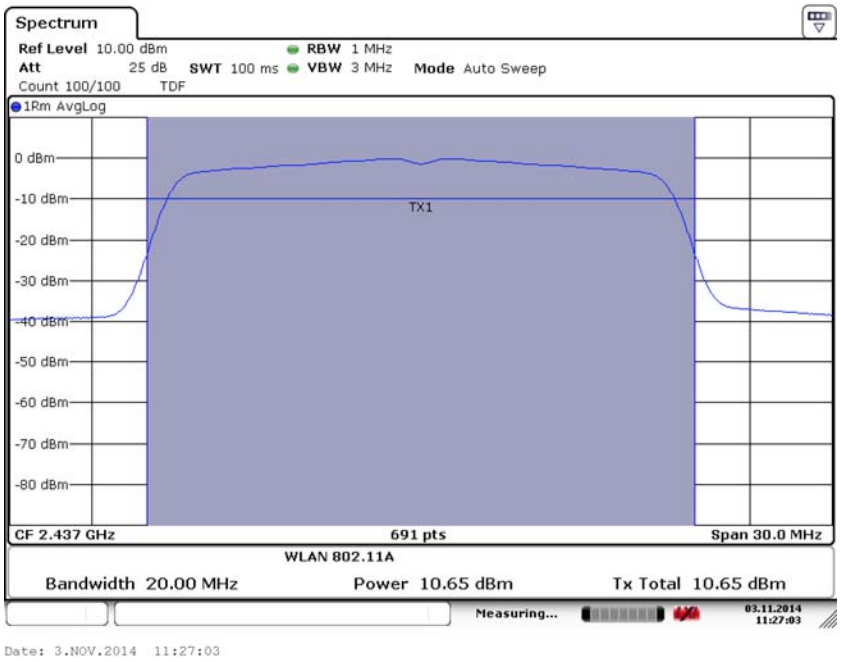

Fig. 41 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS1)

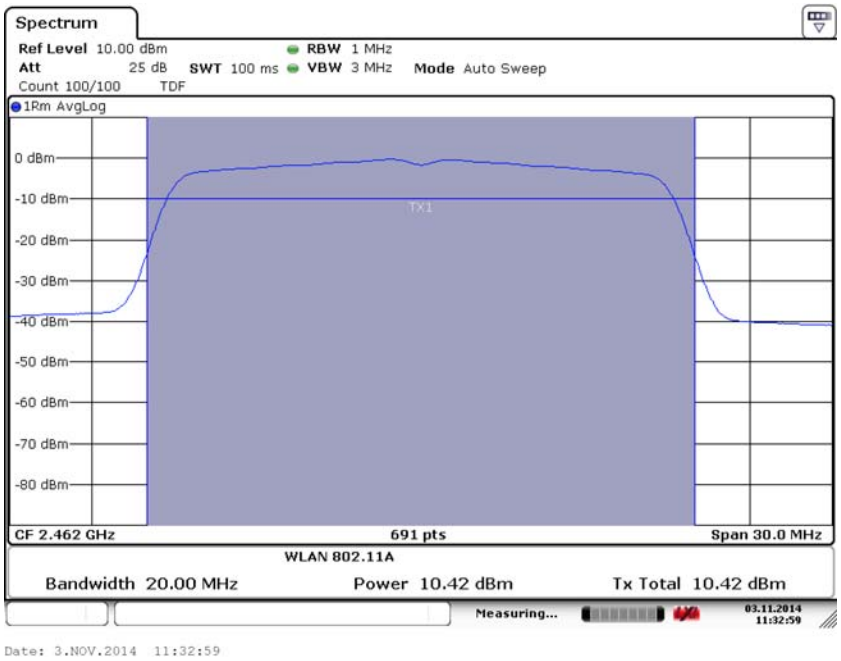

Fig. 42 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS1)

©Copyright. All rights reserved by TMC Beijing.

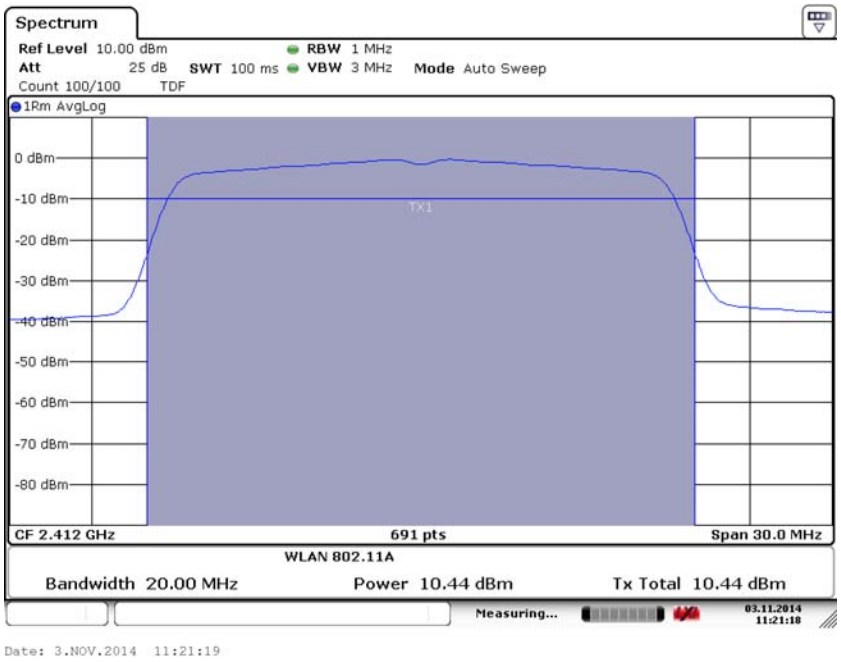

Fig. 43 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS2)

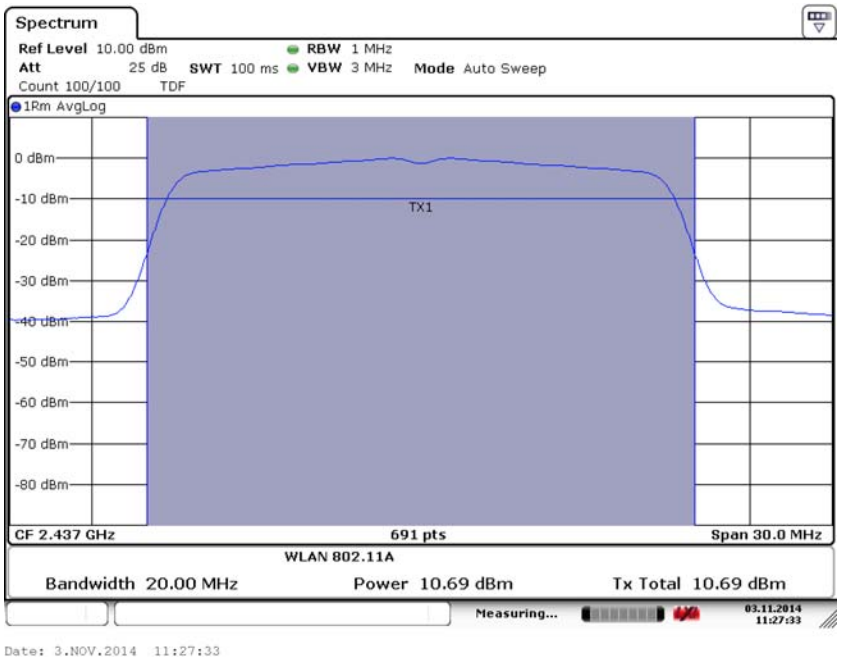

Fig. 44 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS2))

©Copyright. All rights reserved by TMC Beijing.

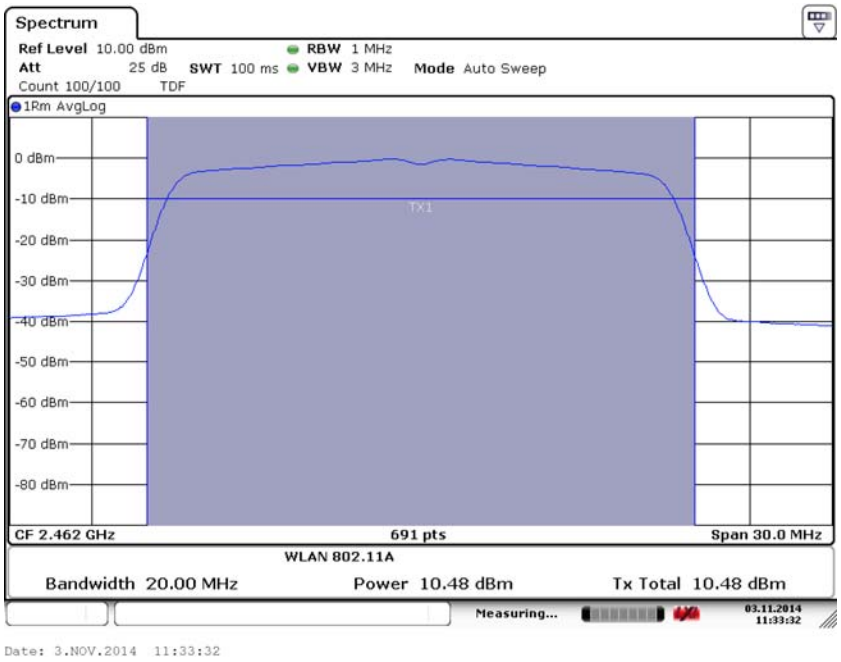

Fig. 45 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS2)

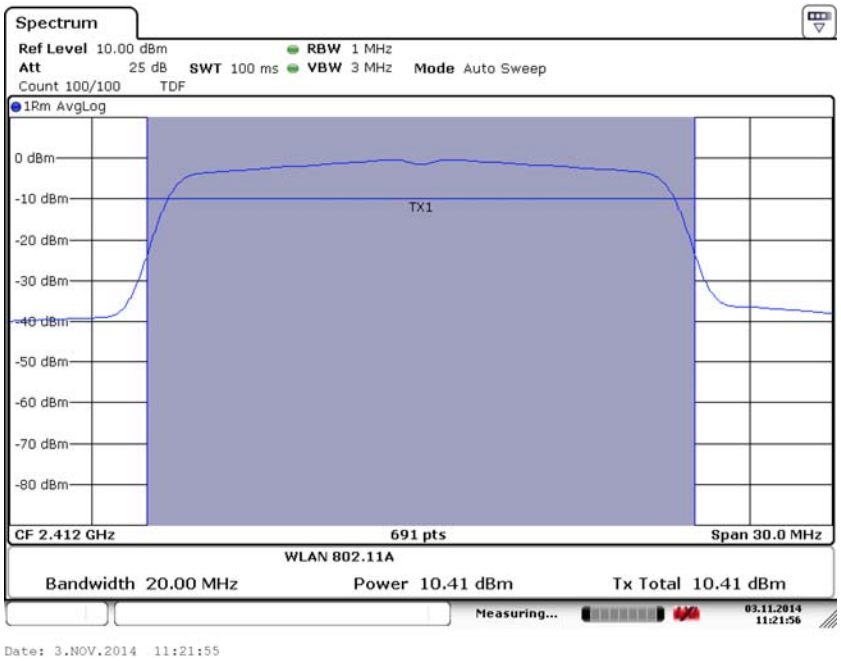

Fig. 46 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS3)

©Copyright. All rights reserved by TMC Beijing.

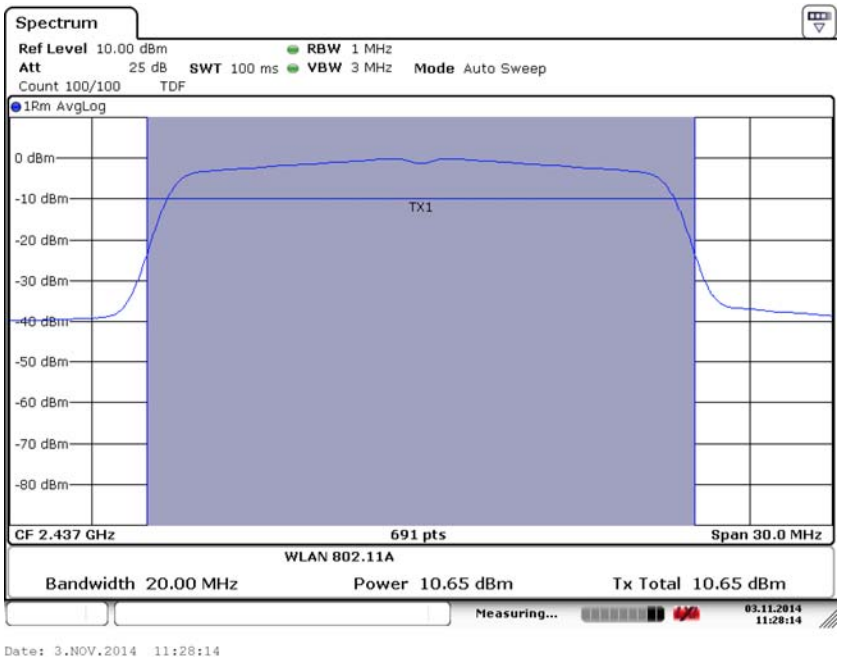

Fig. 47 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS3)

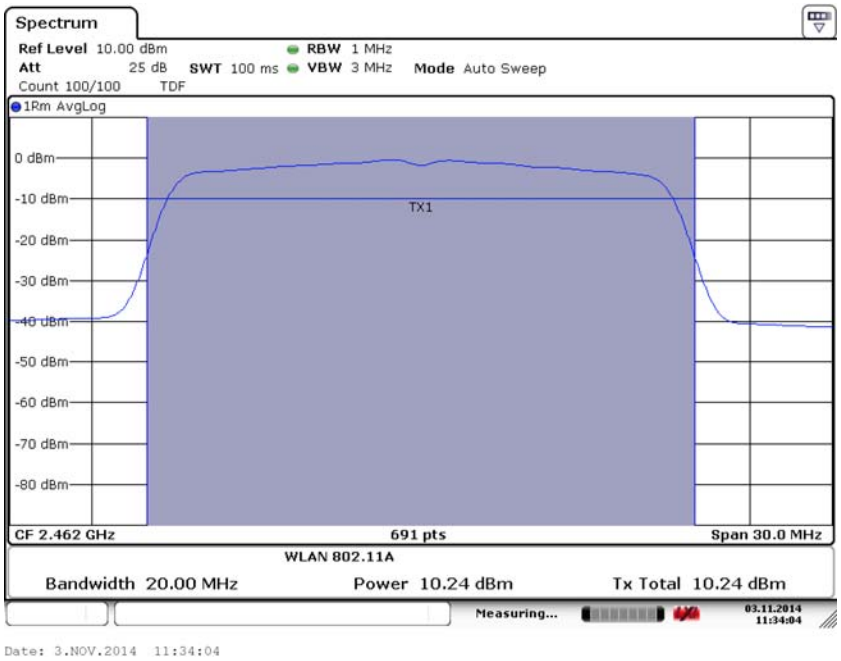

Fig. 48 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS3)

©Copyright. All rights reserved by TMC Beijing.

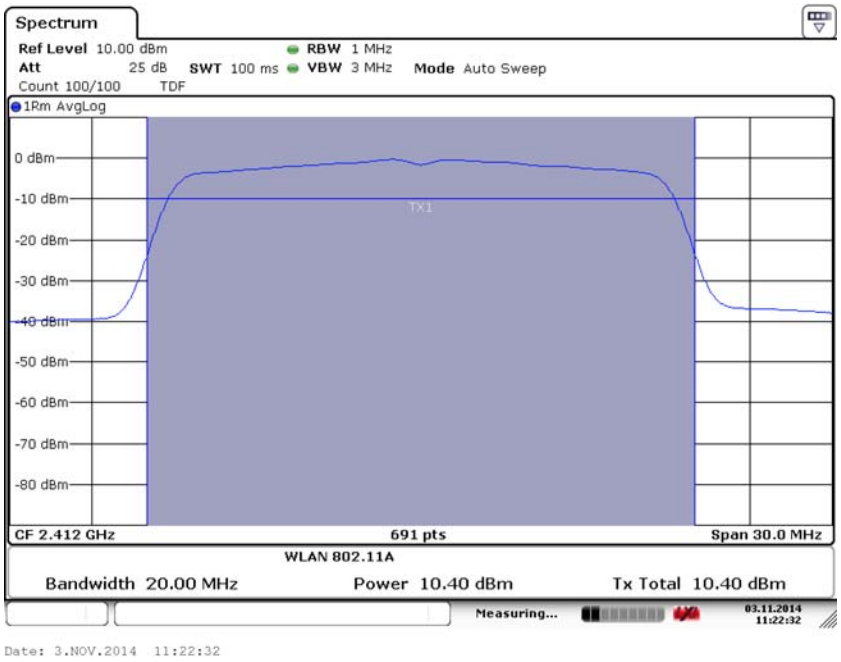

Fig. 49 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS4)

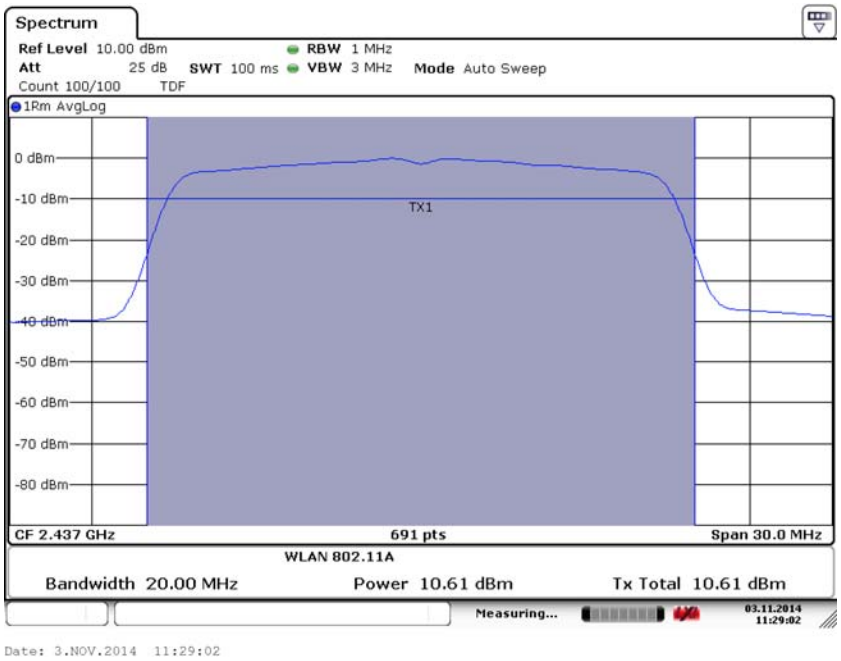

Fig. 50 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS4)

©Copyright. All rights reserved by TMC Beijing.

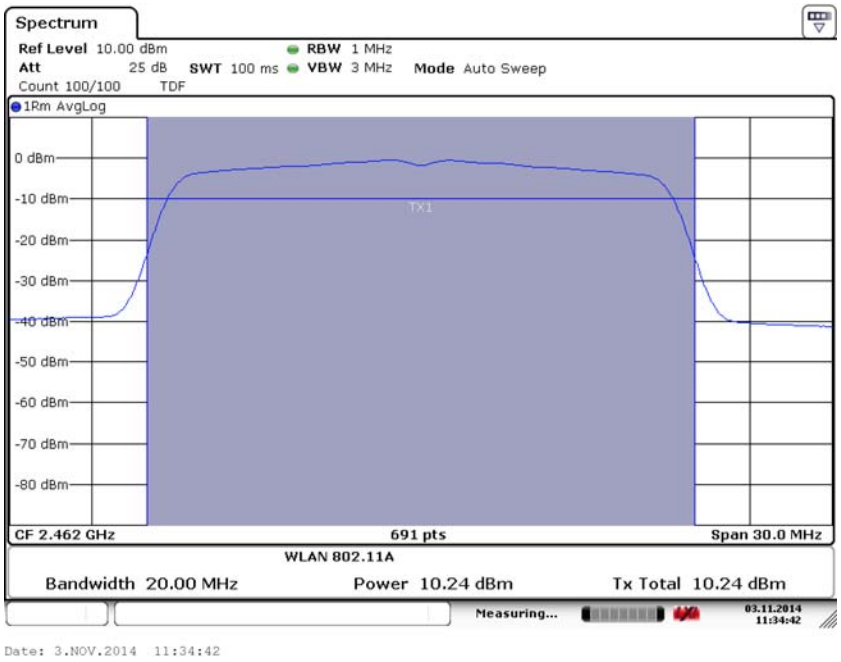

Fig. 51 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS4)

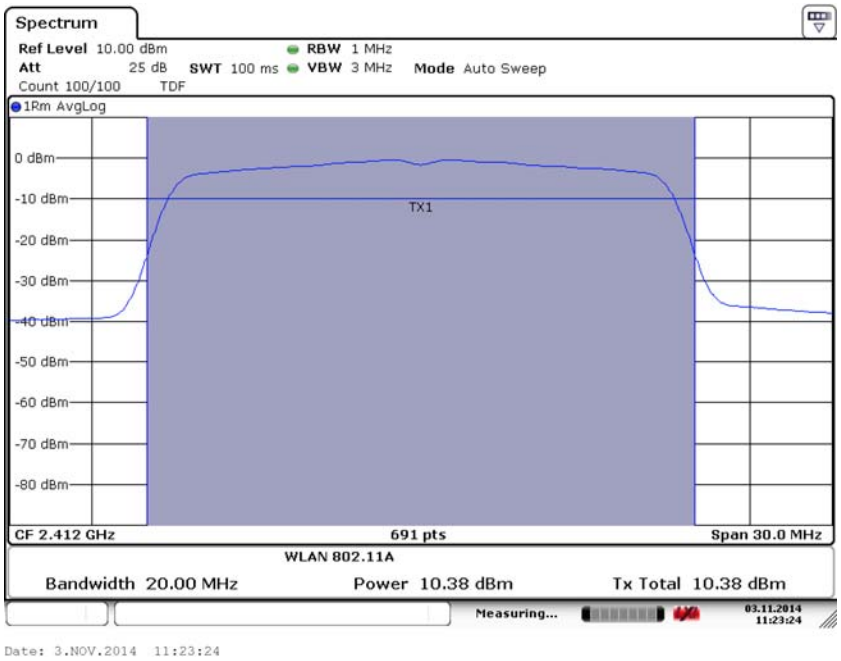

Fig. 52 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS5)

©Copyright. All rights reserved by TMC Beijing.

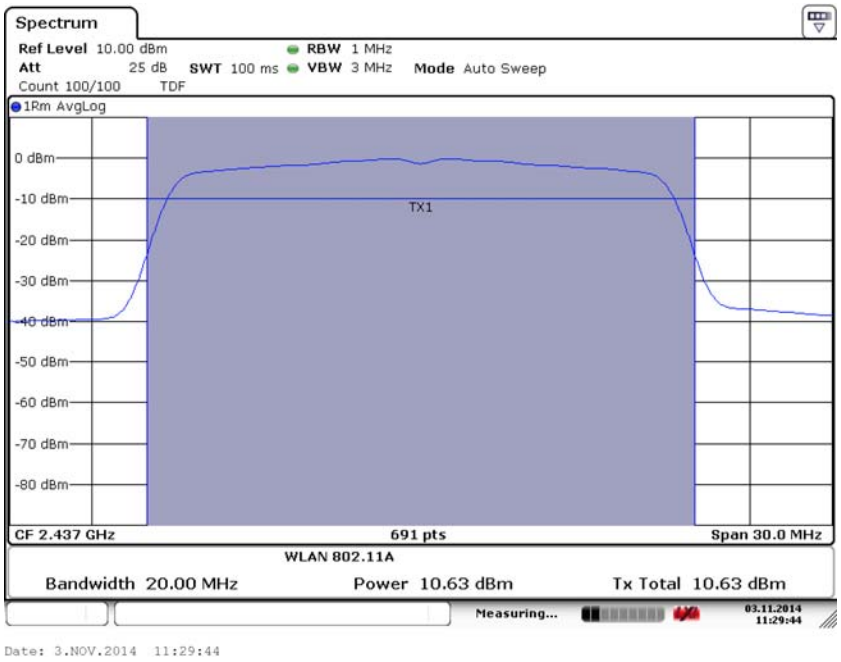

Fig. 53 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS5)

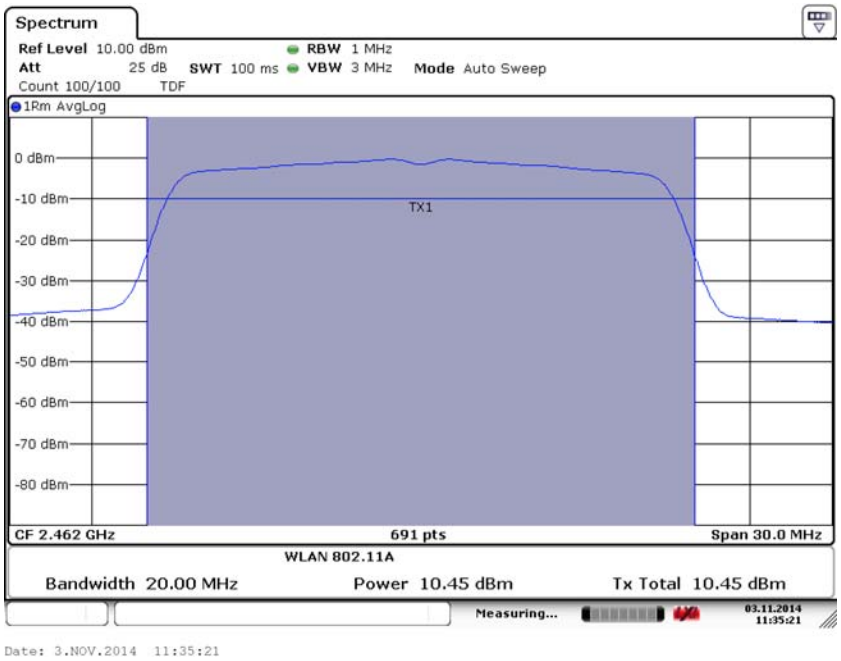

Fig. 54 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS5)

©Copyright. All rights reserved by TMC Beijing.

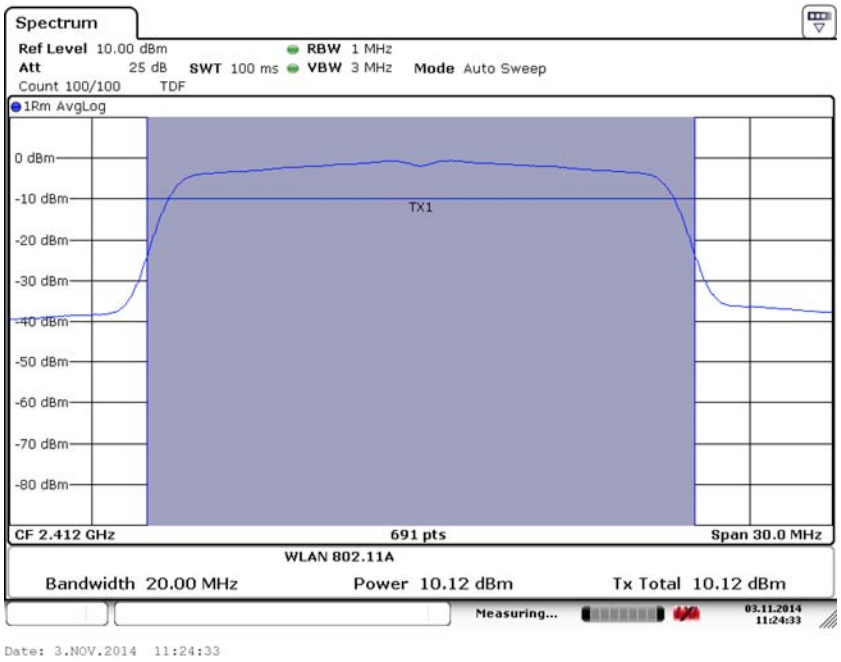

Fig. 55 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS6)

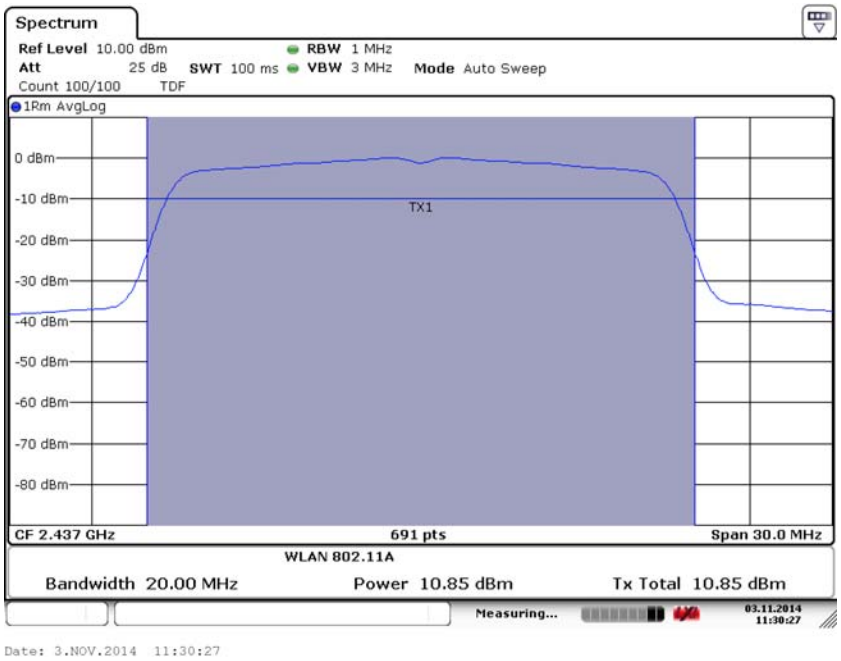

Fig. 56 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS6)

©Copyright. All rights reserved by TMC Beijing.

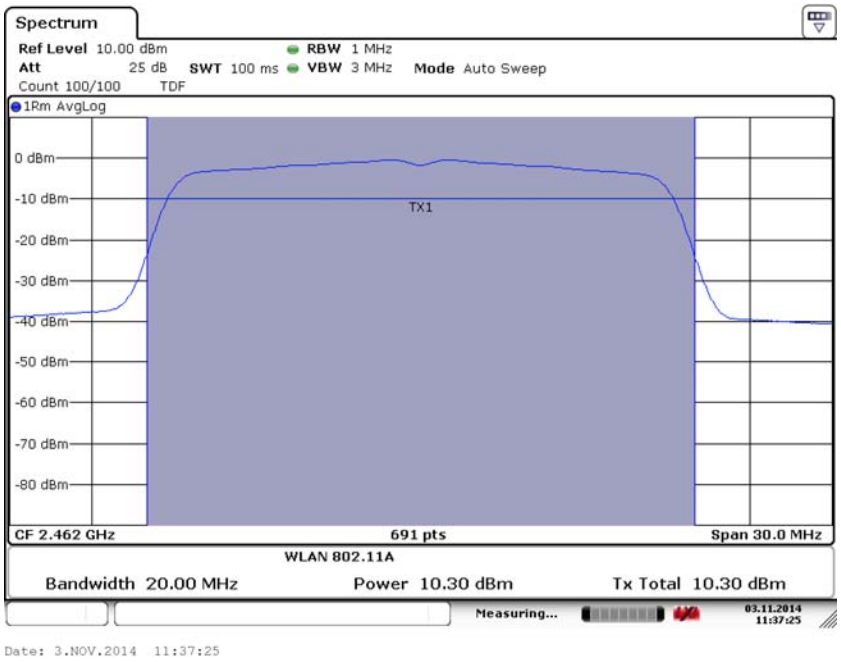

Fig. 57 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS6)

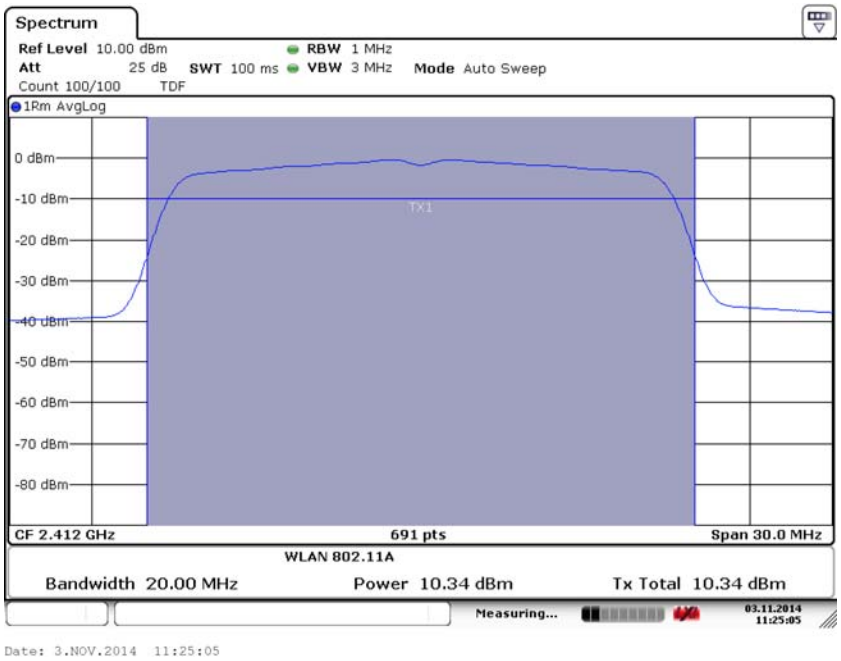

Fig. 58 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS7)

©Copyright. All rights reserved by TMC Beijing.

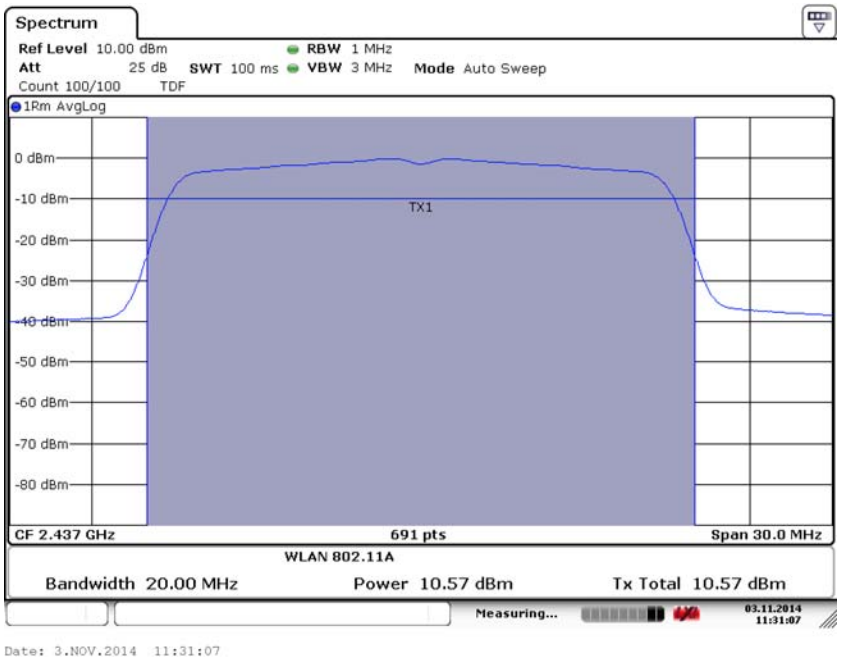

Fig. 59 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS7)

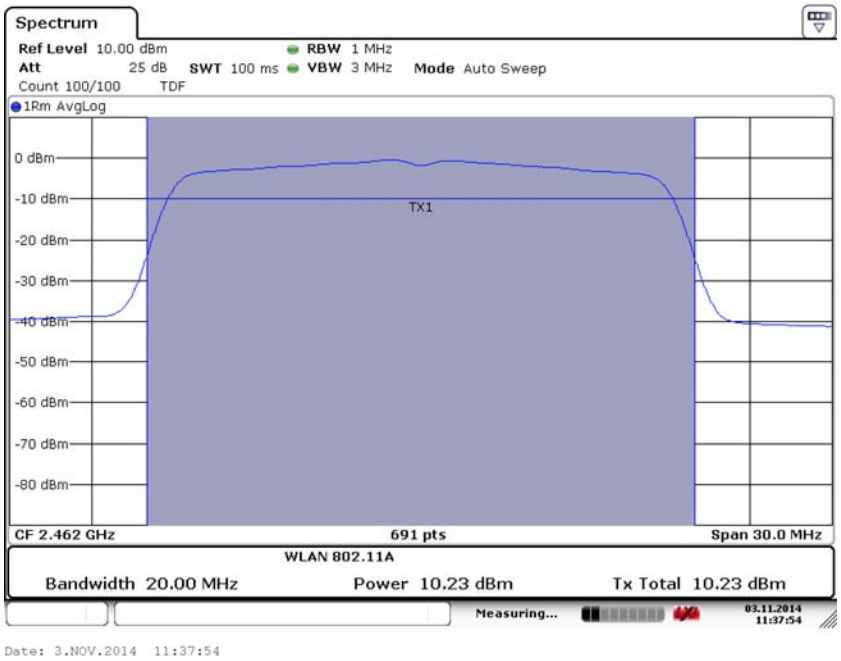

Fig. 60 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS7)

©Copyright. All rights reserved by TMC Beijing.

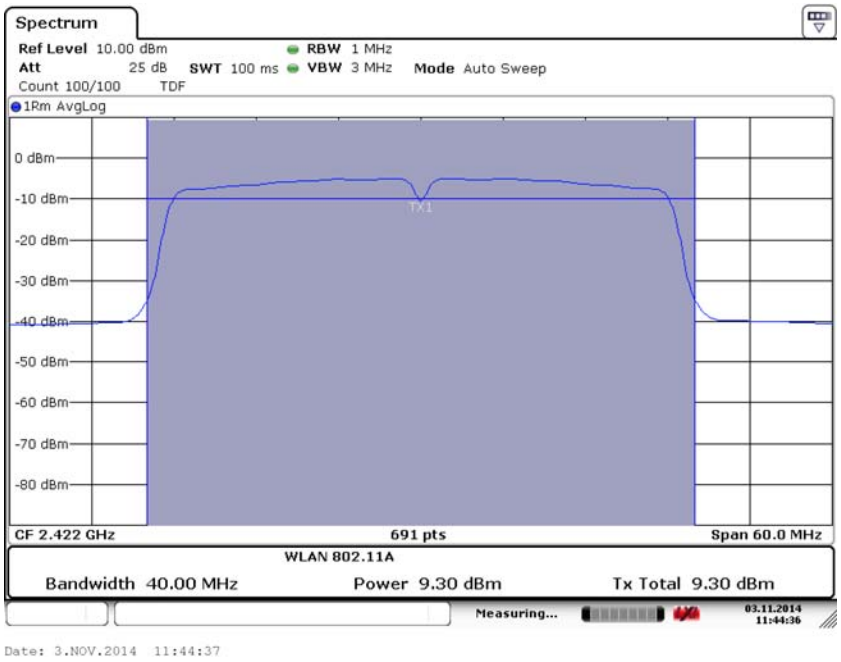

Fig. 61 Maximum Average Output Power (802.11n-40MHz, Ch 1,MCS0)

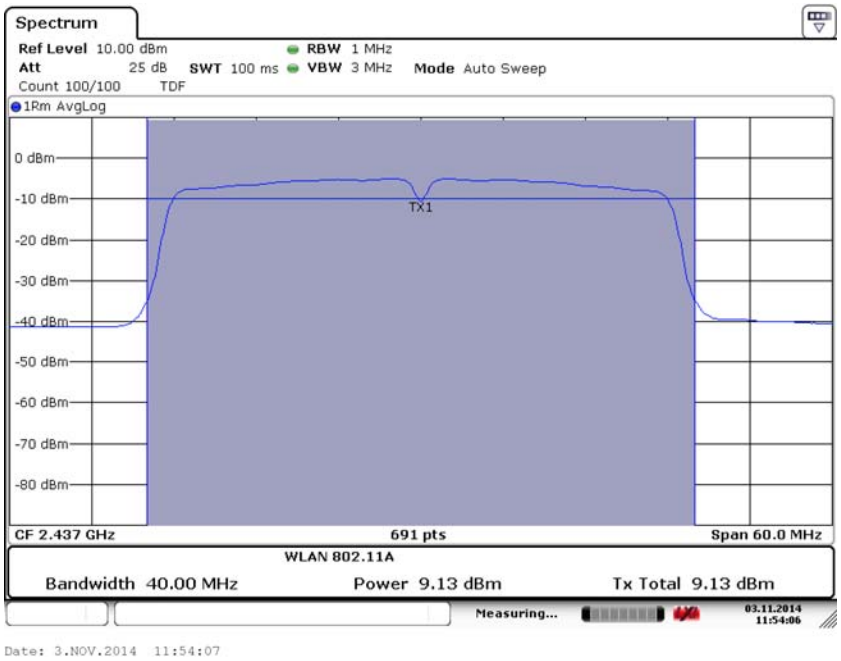

Fig. 62 Maximum Average Output Power (802.11n- 40MHz,Ch6,MCS0)

©Copyright. All rights reserved by TMC Beijing.

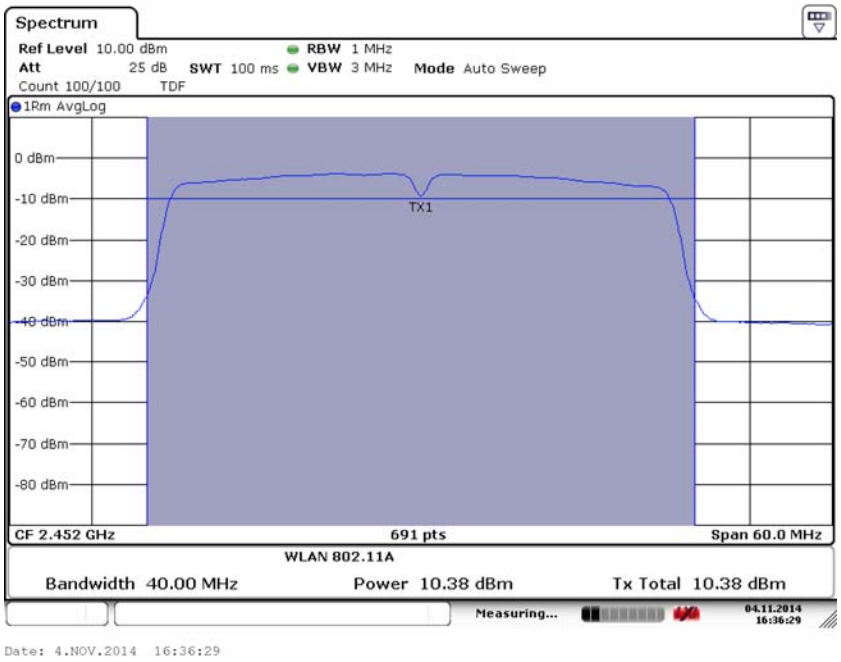

Fig. 63 Maximum Average Output Power (802.11n- 40MHz,Ch11,MCS0)

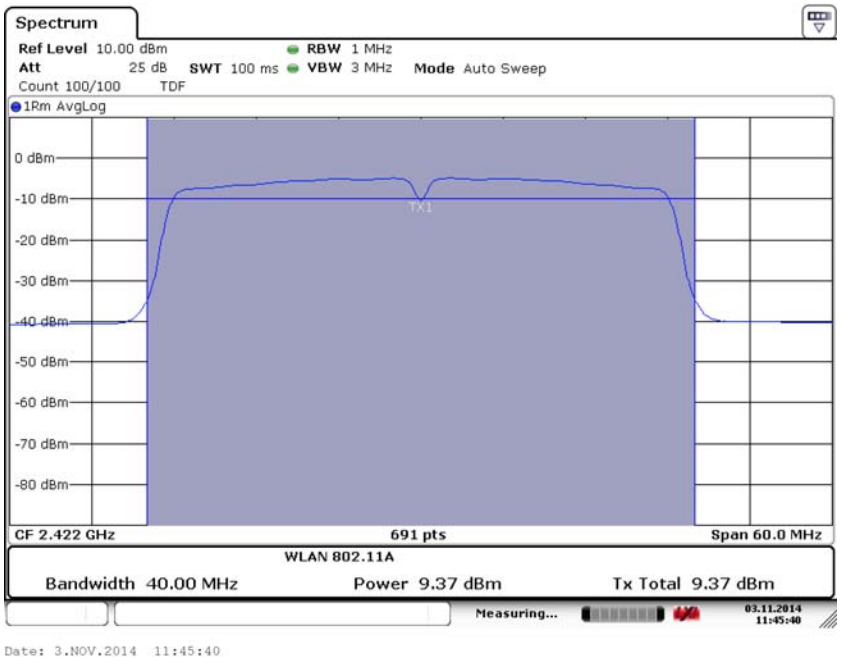

Fig. 64 Maximum Average Output Power (802.11n- 40MHz,Ch1,MCS1)

©Copyright. All rights reserved by TMC Beijing.

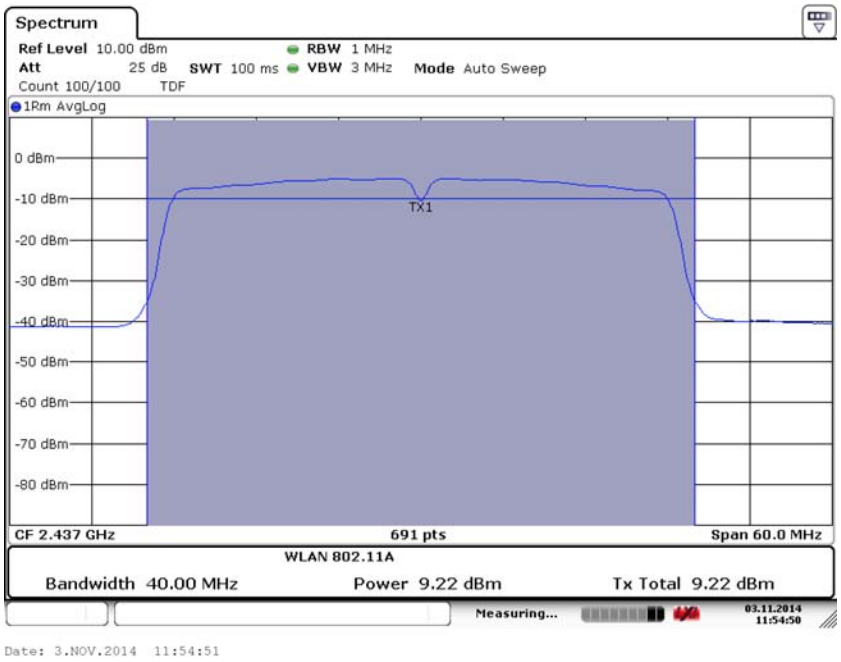

Fig. 65 Maximum Average Output Power (802.11n- 40MHz,Ch6,MCS1)

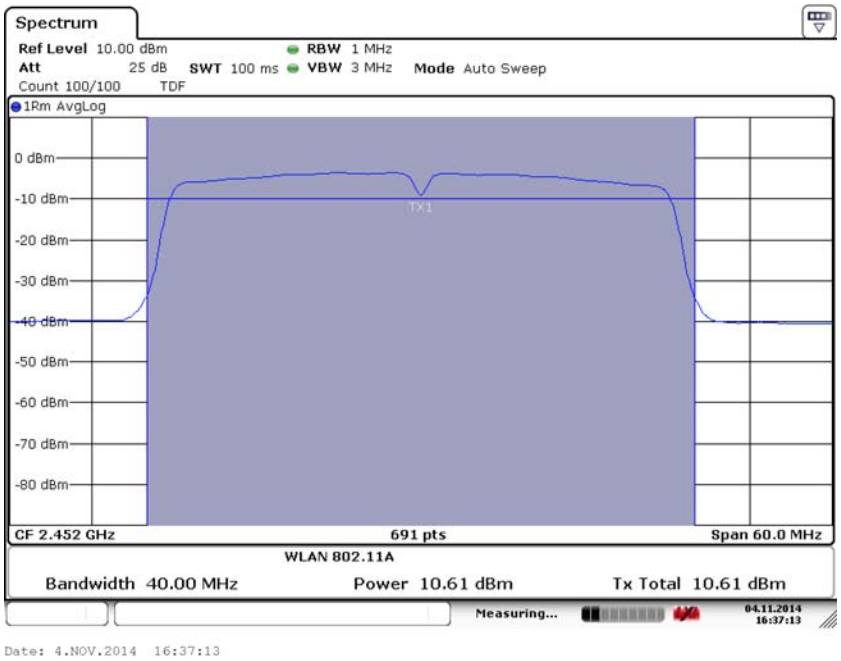

Fig. 66 Maximum Average Output Power (802.11n- 40MHz,Ch11,MCS1)

©Copyright. All rights reserved by TMC Beijing.

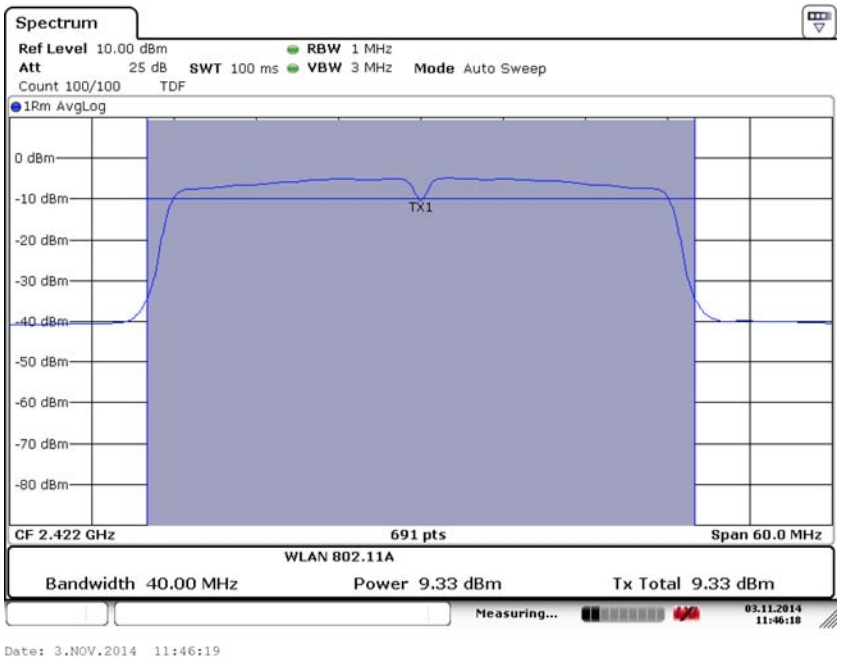

Fig. 67 Maximum Average Output Power (802.11n- 40MHz,Ch1,MCS2)

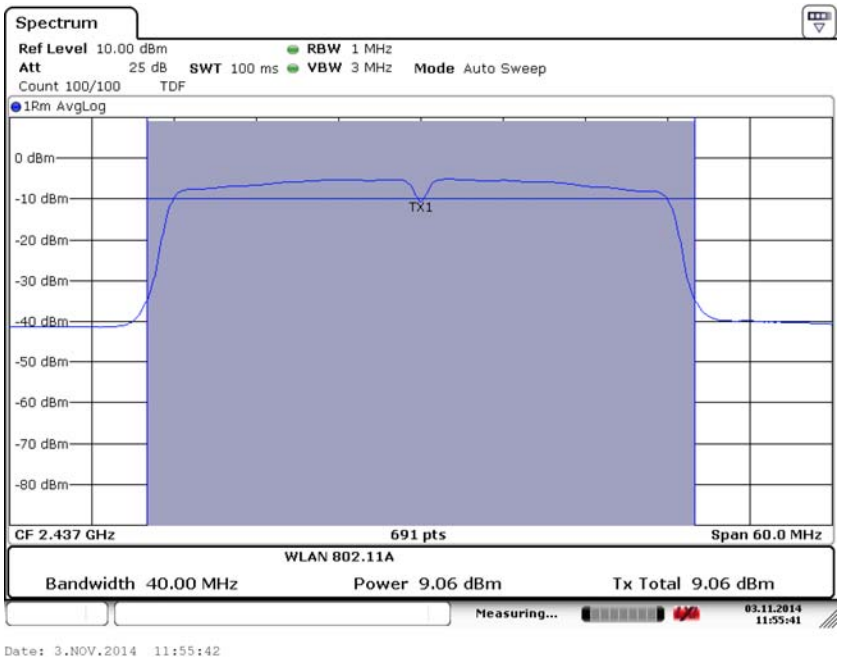

Fig. 68 Maximum Average Output Power (802.11n- 40MHz,Ch6,MCS2)

©Copyright. All rights reserved by TMC Beijing.

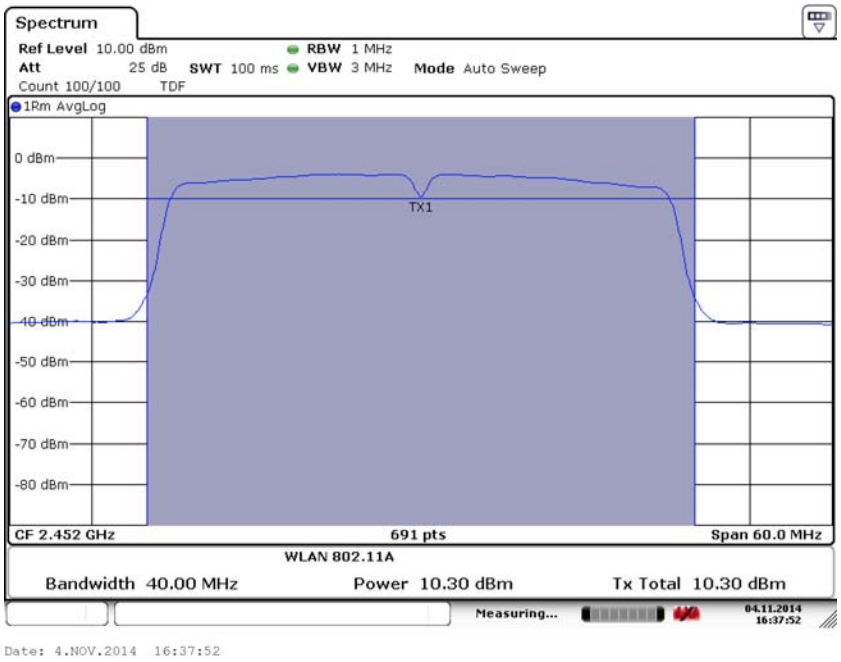

Fig. 69 Maximum Average Output Power (802.11n- 40MHz,Ch11,MCS2)

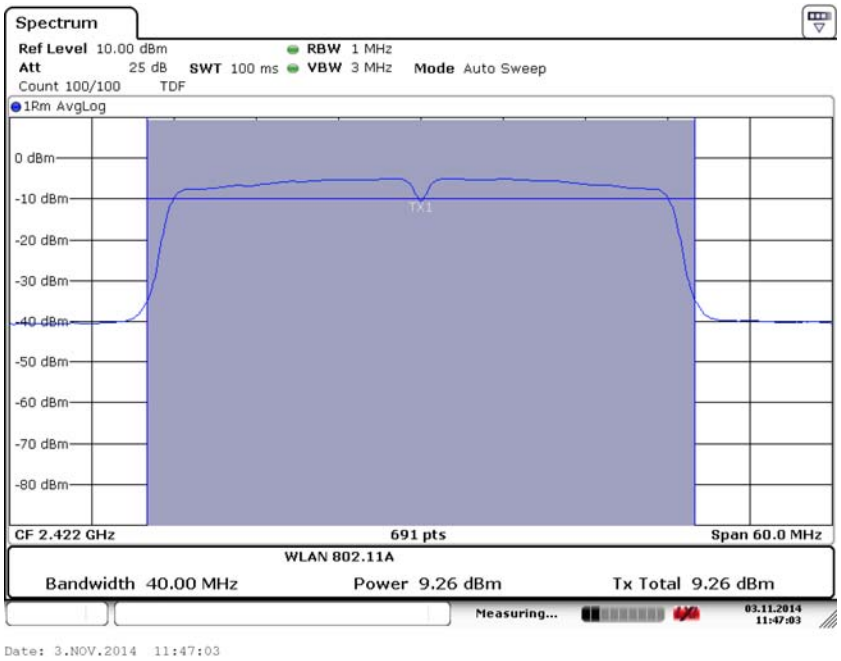

Fig. 70 Maximum Average Output Power (802.11n- 40MHz,Ch1,MCS3)

©Copyright. All rights reserved by TMC Beijing.

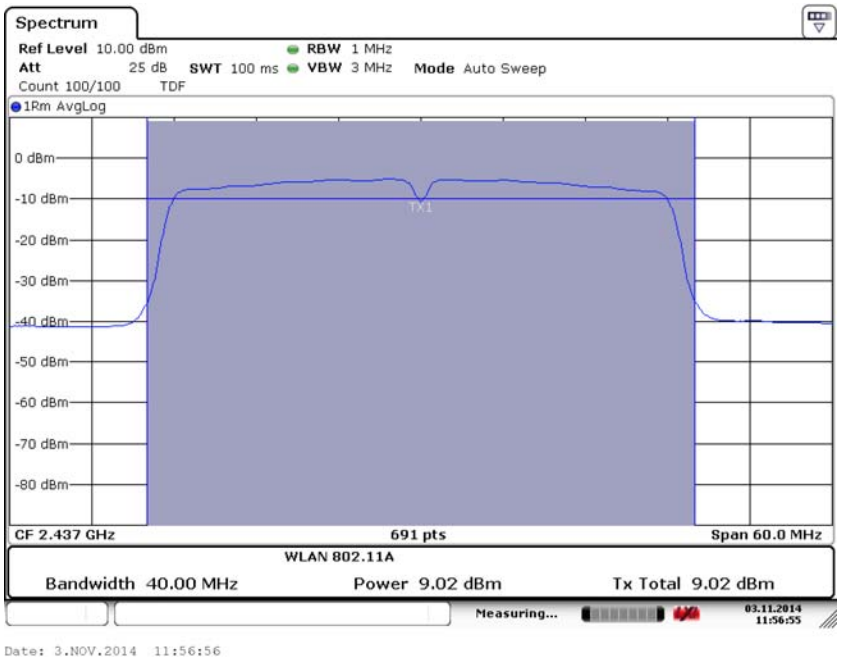

Fig. 71 Maximum Average Output Power (802.11n- 40MHz,Ch6,MCS3)

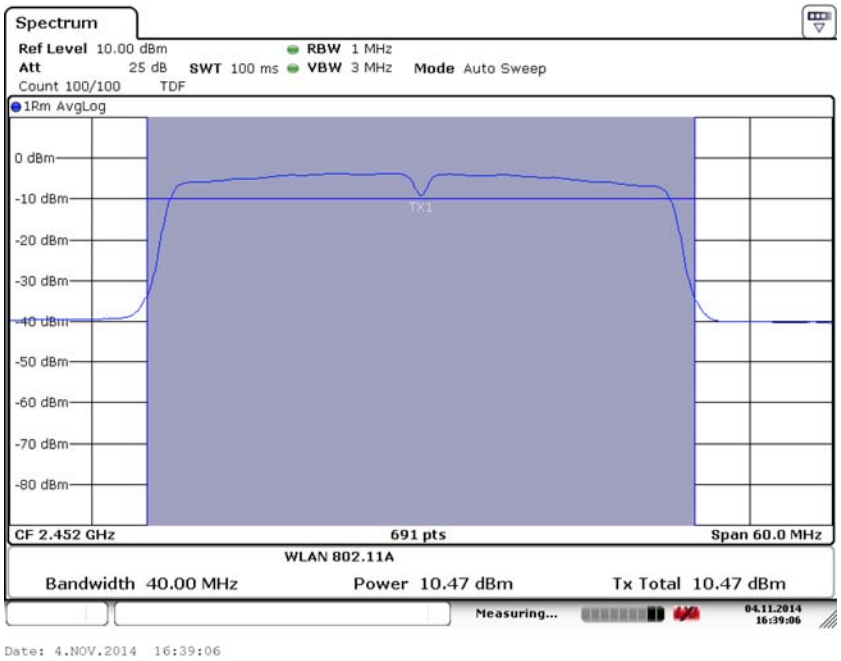

Fig. 72 Maximum Average Output Power (802.11n- 40MHz,Ch11,MCS3)

©Copyright. All rights reserved by TMC Beijing.

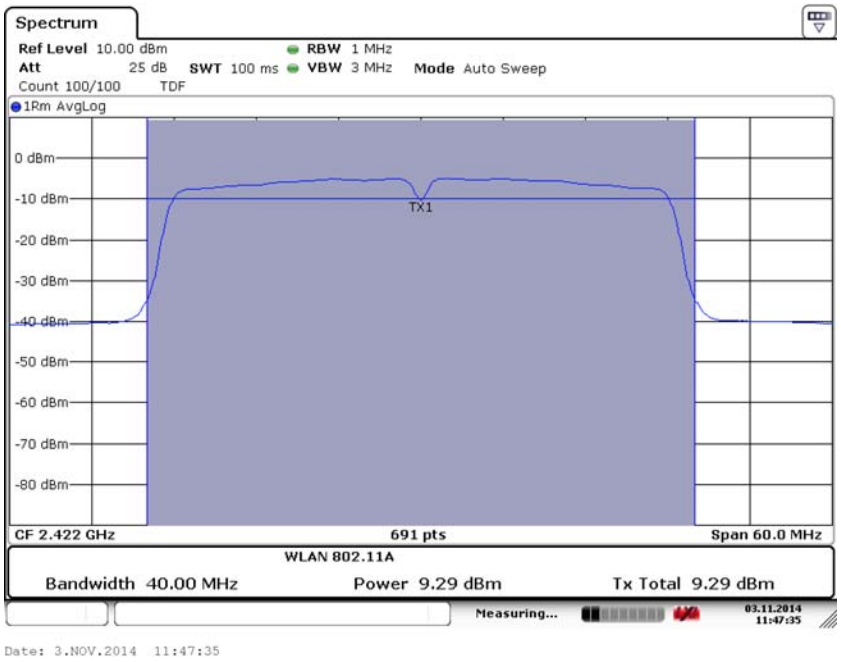

Fig. 73 Maximum Average Output Power (802.11n- 40MHz,Ch1,MCS4)

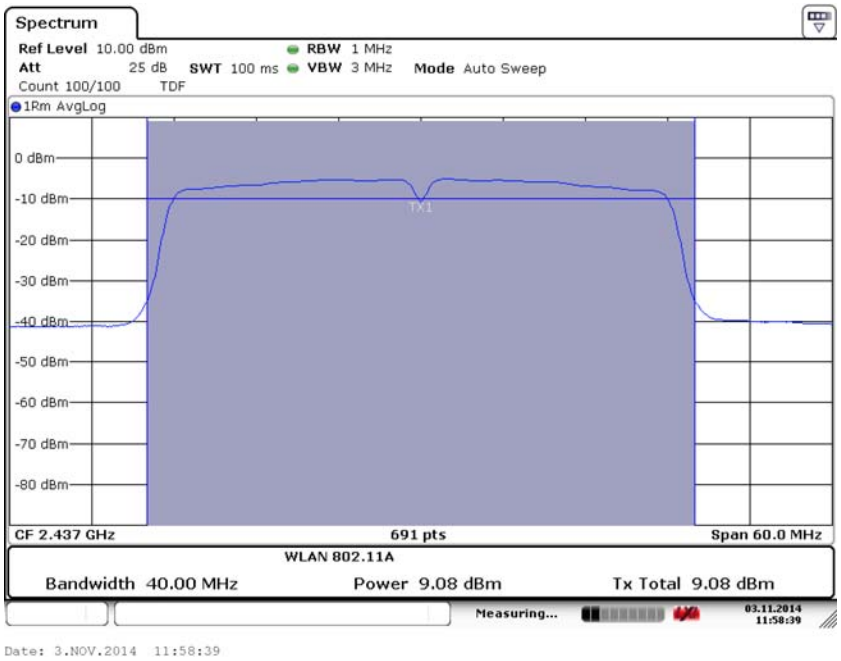

Fig. 74 Maximum Average Output Power (802.11n- 40MHz,Ch6,MCS4)

©Copyright. All rights reserved by TMC Beijing.

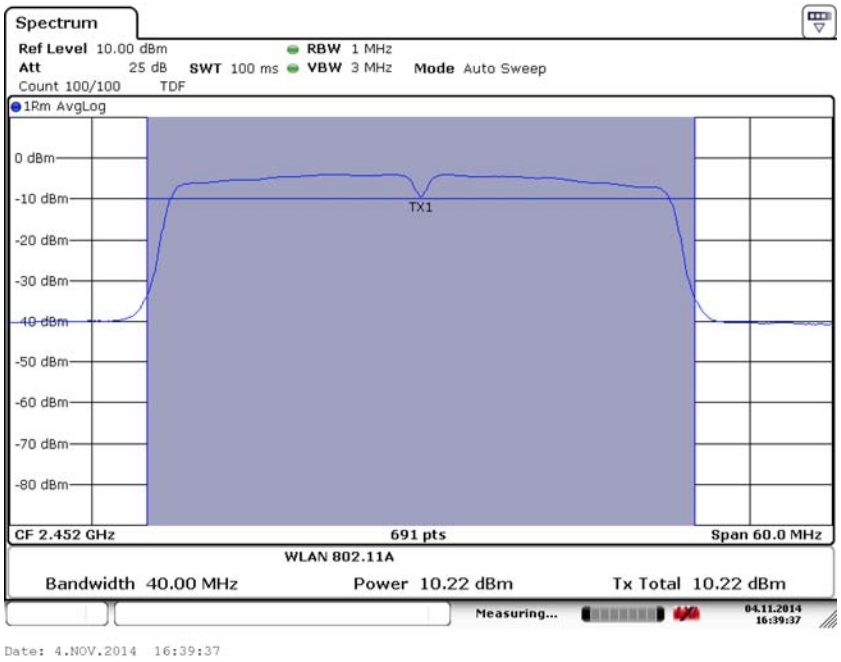

Fig. 75 Maximum Average Output Power (802.11n- 40MHz,Ch11,MCS4)

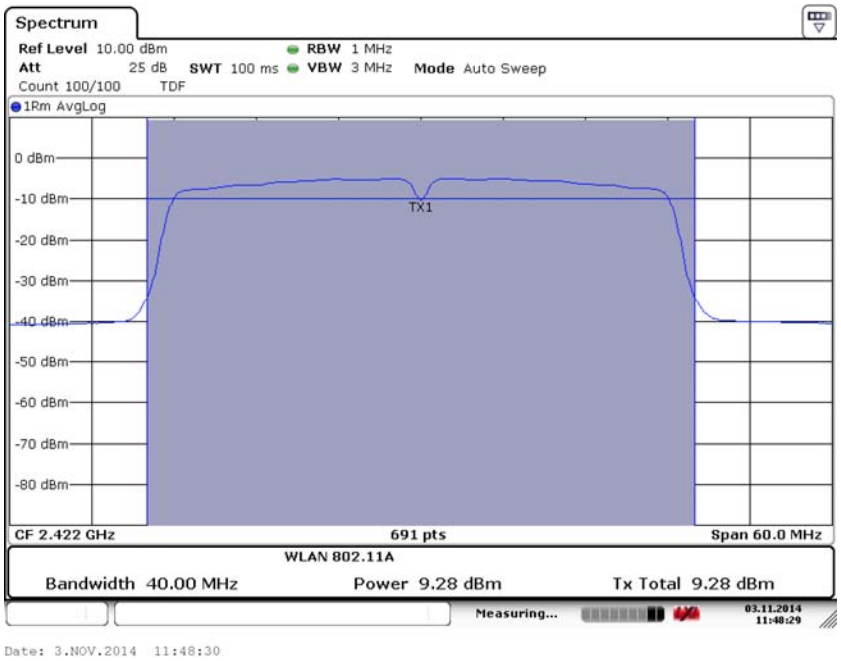

Fig. 76 Maximum Average Output Power (802.11n- 40MHz,Ch1,MCS5)

©Copyright. All rights reserved by TMC Beijing.

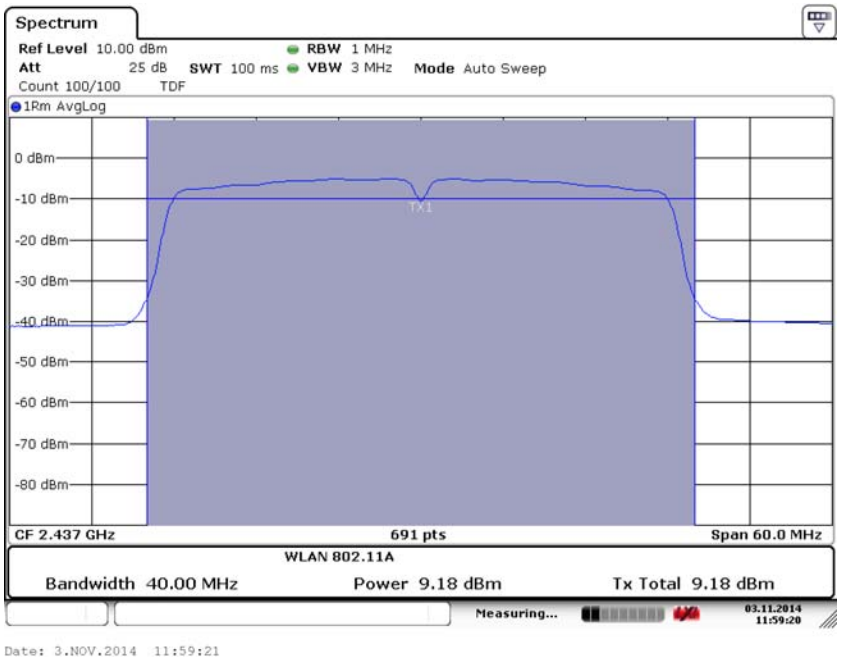

Fig. 77 Maximum Average Output Power (802.11n- 40MHz,Ch6,MCS5)

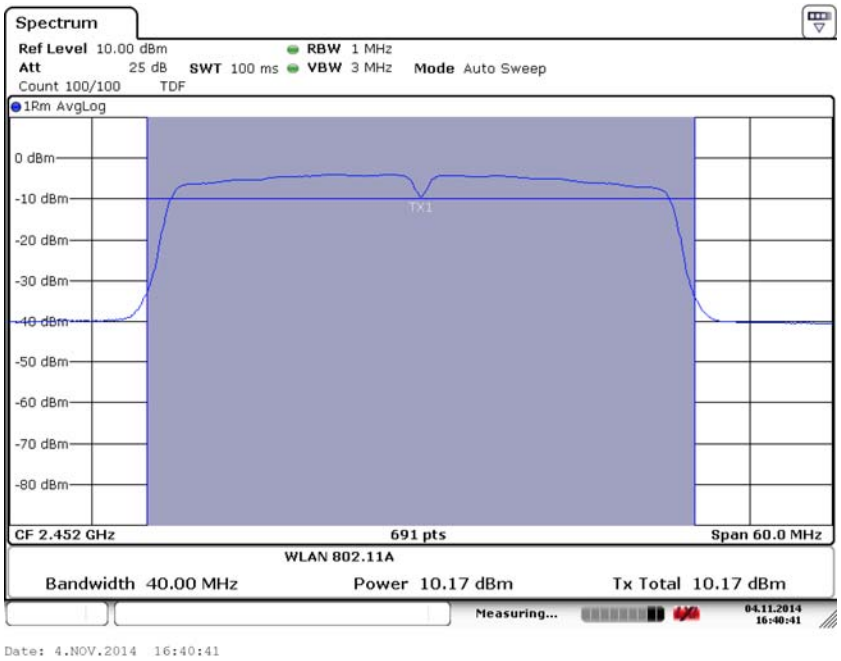

Fig. 78 Maximum Average Output Power (802.11n- 40MHz,Ch11,MCS5)

©Copyright. All rights reserved by TMC Beijing.

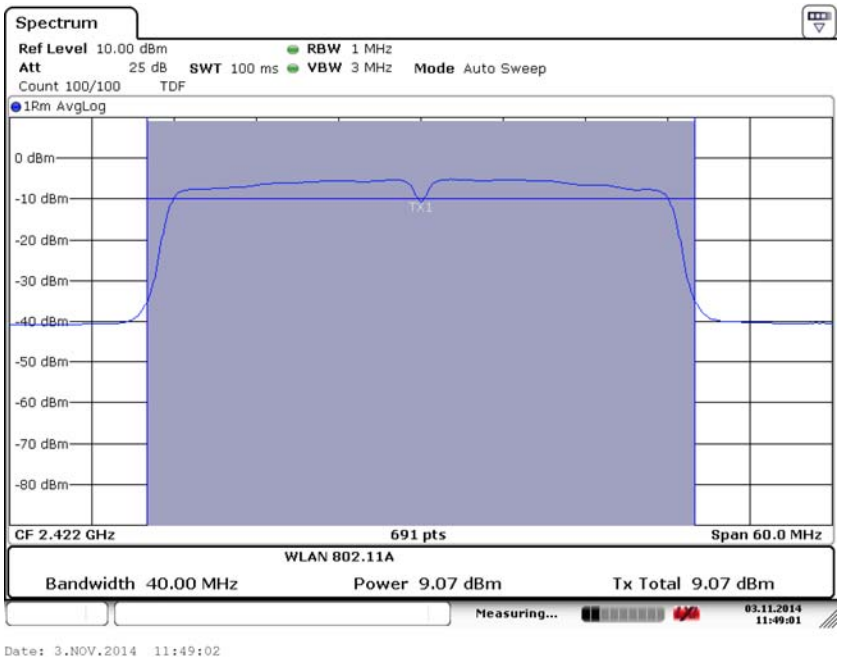

Fig. 79 Maximum Average Output Power (802.11n- 40MHz,Ch1,MCS6)

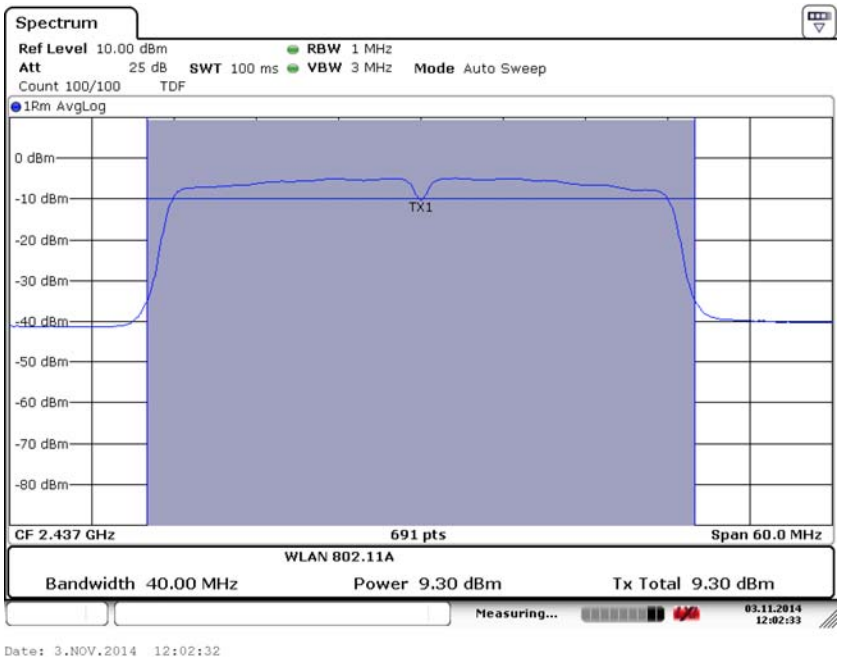

Fig. 80 Maximum Average Output Power (802.11n- 40MHz,Ch6,MCS6)

©Copyright. All rights reserved by TMC Beijing.

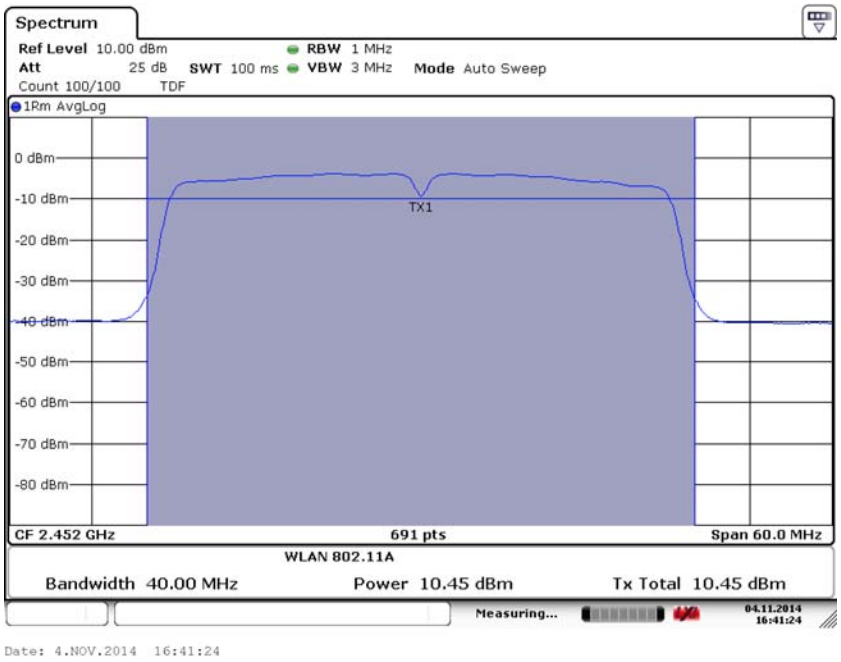

Fig. 81 Maximum Average Output Power (802.11n- 40MHz,Ch11,MCS6)

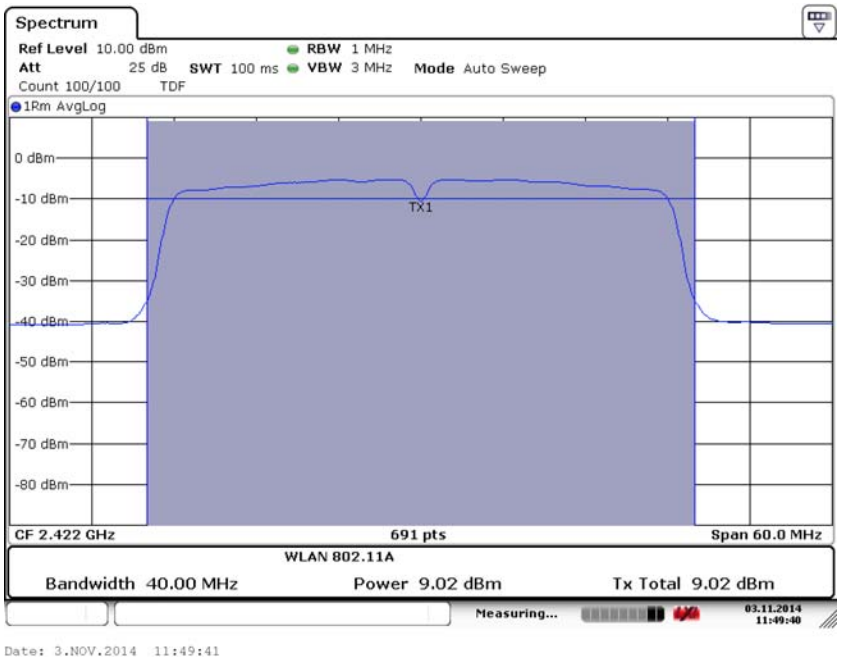

Fig. 82 Maximum Average Output Power (802.11n- 40MHz,Ch1,MCS7)

©Copyright. All rights reserved by TMC Beijing.

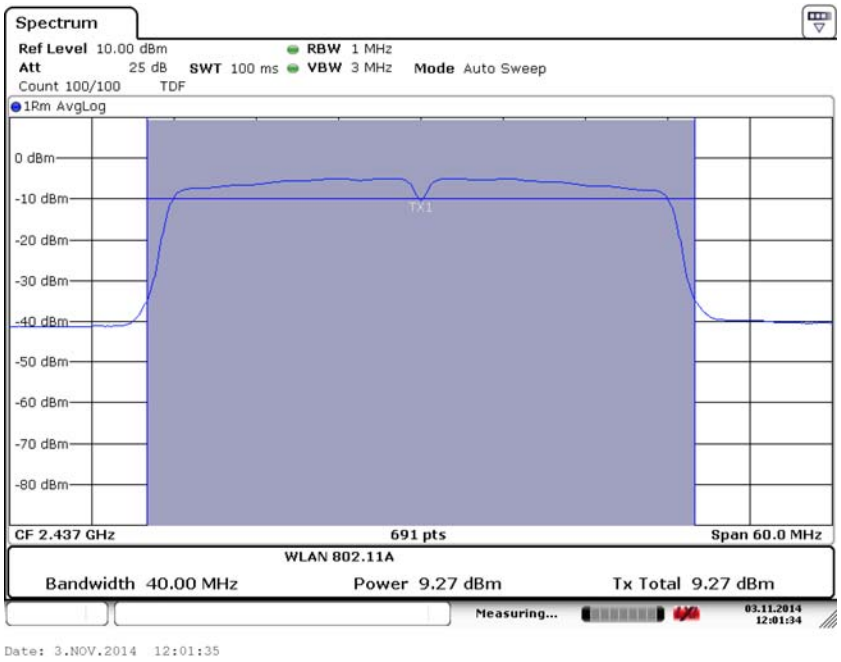

Fig. 83 Maximum Average Output Power (802.11n- 40MHz,Ch6,MCS7)

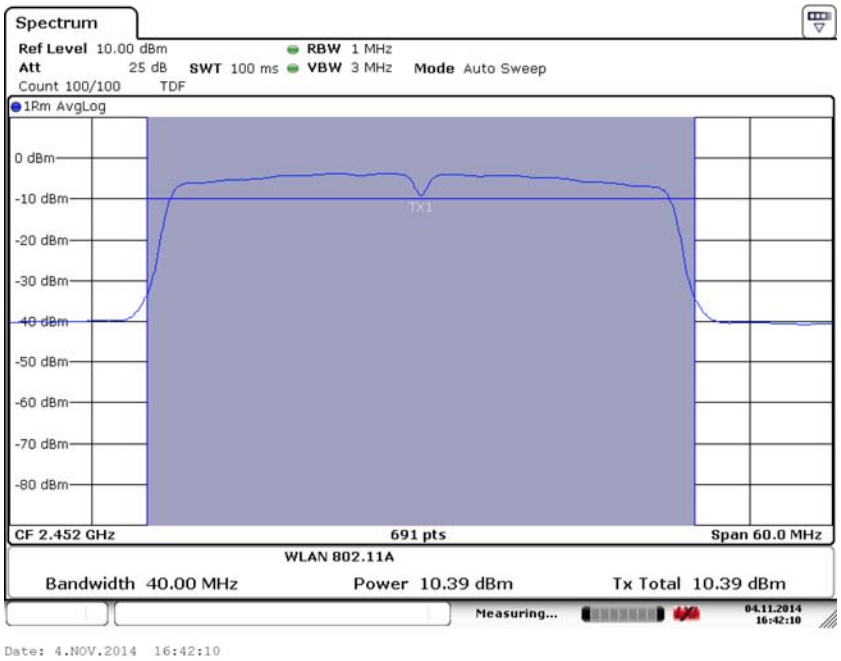

Fig. 84 Maximum Average Output Power (802.11n- 40MHz,Ch11,MCS7)

©Copyright. All rights reserved by TMC Beijing.