

Electromagnetic Compatibility Test Report

Prepared in accordance with

Product Standard:

FCC Part 15: 2007, RSS-210: 2007

on

Lighting Control System

Radio Bridge

Prepared for:

Sensor Switch, Inc.


900 Northrop Road

Wallingford, CT 06492

Prepared by:

TUV Rheinland of North America, Inc.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Auftraggeber: <i>Client:</i>		Sensor Switch, Inc. 900 Northrop Road Wallingford, CT 06492													
Bezeichnung: Identification:	Lighting Control System	Serien-Nr.: <i>Serial No.</i>	PROTOYPE												
Gegenstand der Prüfung: <i>Test item:</i>	Radio Bridge	Prüfdatum: <i>Date tested:</i>	October 8th -10th 2007												
Prüfort: <i>Testing location:</i>	TUV Rheinland of North America 12 Commerce Road Newtown, CT 06470-1607 NVLAP # 200111-0														
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15: FCC Part 15C Section 15.247 FCC Part 15.247 (a)(2), FCC Part 15.247 (b)(3), FCC Part 15.247 (b)(5) and 1.1310, FCC Part 15.247 (c), 15.205, 15.209, FCC Part 15, FCC Part 15.247 (d), FCC Part 15.215 (b), FCC Part 15.215 (c), RSS-210														
Prüfergebnis: <i>Test Result</i>	Der vorstehend beschriebene Prüfgegenstand wurde geprüft und entspricht oben genannter Prüfgrundlage. The above product was found to be Compliant to the above test standard(s)														
geprüft / tested by: Dieter Baldamus		kontrolliert / reviewed by: Bruce Fagley													
 24 June 2008 <table border="0"> <tr> <td>Datum</td> <td>Name</td> <td>Unterschrift</td> </tr> <tr> <td><i>Date</i></td> <td><i>Name</i></td> <td><i>Signature</i></td> </tr> </table>		Datum	Name	Unterschrift	<i>Date</i>	<i>Name</i>	<i>Signature</i>	 24 June 2008 <table border="0"> <tr> <td>Datum</td> <td>Name</td> <td>Unterschrift</td> </tr> <tr> <td><i>Date</i></td> <td><i>Name</i></td> <td><i>Signature</i></td> </tr> </table>		Datum	Name	Unterschrift	<i>Date</i>	<i>Name</i>	<i>Signature</i>
Datum	Name	Unterschrift													
<i>Date</i>	<i>Name</i>	<i>Signature</i>													
Datum	Name	Unterschrift													
<i>Date</i>	<i>Name</i>	<i>Signature</i>													
Sonstiges : <i>Other Aspects:</i>	None														
Abkürzungen: OK, Pass, Compliant, Complies = entspricht Prüfgrundlage Fail, Not Compliant, Does not Comply = entspricht nicht Prüfgrundlage N/A = nicht anwendbar		Abbreviations: OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable													
															
US5112		200111-0													
		Industry Canada													
		3466D-1													

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	PURPOSE	5
1.3	SUMMARY OF TEST RESULTS	6
2	LABORATORY INFORMATION	7
2.1	ACCREDITATIONS & ENDORSEMENTS	7
2.2	MEASUREMENT UNCERTAINTY	7
2.3	CALIBRATION TRACEABILITY	7
3	PRODUCT INFORMATION	8
3.1	PRODUCT DESCRIPTION	8
3.2	EQUIPMENT MODIFICATIONS	8
3.3	TEST PLAN	8
4	EMISSIONS.....	11
4.1	SPECTRUM BANDWIDTH	11
4.2	MAXIMUM OUTPUT POWER	17
4.3	RF HUMAN EXPOSURE LIMITS	25
4.4	RADIATED SPURIOUS EMISSIONS	27
4.5	TRANSMITTER POWER DENSITY SPECTRUM	45
4.6	CONDUCTED EMISSIONS	50
4.7	FREQUENCY STABILITY	54
4.8	BAND EDGE MEASUREMENT	58
APPENDIX A	61	
5	TEST PLAN.....	61
5.1	GENERAL INFORMATION	61
5.2	MODEL(S) NAME	61
5.3	TYPE OF PRODUCT	61
5.4	EQUIPMENT UNDER TEST (EUT) DESCRIPTION	62
5.5	MODIFICATIONS	62
5.6	PRODUCT ENVIRONMENT	62
5.7	COUNTRIES	62
5.8	APPLICABLE DOCUMENTS	63
5.9	GENERAL PRODUCT INFORMATION	64
5.10	EUT POWERED INFORMATION	64
5.11	EUT MODES OF OPERATION	64
5.12	EUT CONFIGURATIONS	65
5.13	EUT CLOCK/OSCILLATOR FREQUENCIES	65
5.14	ELECTRICAL SUPPORT EQUIPMENT	65
5.15	NON - ELECTRICAL SUPPORT EQUIPMENT	66
5.16	EUT EQUIPMENT/CABLING INFORMATION	66

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

5.17	EUT DOORS.....	66
5.18	EUT GROUNDING.....	66
5.19	EUT TEST PROGRAM.....	67
5.20	MONITORING OF EUT DURING TESTING.....	67
5.21	EUT CONFIGURATION BLOCK DIAGRAM.....	67
5.22	CONSTRUCTIONAL DATA FORM.....	68

1 General Information

1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Part 15C, based on the results of testing performed on October 8th -10th 2007 on the Lighting Control System, Model No. Radio Bridge, manufactured by Sensor Switch, Inc.. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

1.3 Summary of Test Results

Applicant	Sensor Switch, Inc. 900 Northrop Road Wallingford, CT 06492	Tel	(203) 265-2842	Contact	William J Fassbender
		Fax	(203) 265-1565	email	fuzzy@sensorswitch.com
Type of Equipment	Lighting Control System	Model Number	Radio Bridge		
Standards	Description	Severity Level or Limit		Criteria	Test Result
FCC Part 15	Radio Frequency Devices -Part C	See called out basic standards below		See Below	Complies
FCC Part 15.247 (a) (2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System	500kHz on a 6dB Bandwidth, 2.405 GHz - 2.480 GHz		Limit	Complies
FCC Part 15.247 (b) (3)	Maximum Output Power	1 Watt (30dBm)		Limit	Complies
FCC Part 15.247 (b)(5) and 1.1310	RF Human Exposure Limit	1.0 (mW/cm ²)		Limit	Complies
FCC Part 15.247 (c), 15.205, 15.209	Radiated Spurious Emissions	-20dBc, 15.205 (a), 15.209 (a)		Limit	Complies
FCC Part 15.247 (d)	Transmitter Power Density	8 dBm/3kHz		Limit	Complies
FCC Part 15.207	Conducted Emissions	15.207 (a)		Limit	Complies
FCC Part 15.215 (b)	Frequency Stability	Containment of 20dB,		Limit	Complies
FCC Part 15.215 (c) RSS-210	20dB Bandwidth	20dB Contained within the Frequency Band		Within Limit	Complies

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at 12 Commerce Road, Newtown CT is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No US5112). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 NIST / NVLAP

Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2005 (Lab code: 200111-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Industry Canada

Registration No.: 3466D-1. The OATS has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2003.

2.2 Measurement Uncertainty

General

The estimated combined standard uncertainty for conducted immunity measurements is $\pm 1.4\text{dB}$.
The estimated combined standard uncertainty for radiated emissions measurements is $\pm 1.6\text{ dB}$.
The estimated combined standard uncertainty for conducted emissions measurements is $\pm 1.2\text{dB}$.

2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The radio bridge is only one component that is part of a new lighting control system being designed by Sensor Switch, Inc. The name for the newly designed system is called 'nLight'. nLight will typically consist of the following components: SensorView software, at least one gateway, at least one bridge (or two radio bridges), devices for switching lighting loads (nPP-16, nWSD, nCMR, ...), devices for detecting occupancy, light levels (nCM, nWV, nCM-ADC, ...) and devices for user control (nPOD, nPOD-D, ...). SensorView software is a browser based application which will allow clients to customize their buildings lighting needs. The software will have the ability to change device parameters, load profiles, update device firmware, respond to load shedding, and many more selectable options. The gateway provides a method of translating Ethernet packets from SensorView to RS-485 where all nLight devices can communicate. The bridge (or radio bridges) contains eight RS-485 ports. Each port typically represents a lighting zone to which devices can be connected. For example, a private office will typically require one nCMR and one nPOD. An open office area could potentially use five nPP-16 and seven nCM-PDT depending on the overall size and lighting load.

3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

3.3 Test Plan

The EUT product information, test configuration, mode of operation, test types, test procedures, test levels, pass/failure criteria, in this report were carried out per the product test plan located in appendix A of this report



Figure 1 – Photo of EUT (Transmitter)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.



Figure 2 – Photo of EUT (Receiver)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4 Emissions

4.1 Spectrum Bandwidth

This test measures the spectrum bandwidth of the intentional radiator signal generated by the EUT.

4.1.1 Over View of Test

Results	Complies (as tested per this report)					Date	11/07/2007	
Standard	FCC Part 15.247 (a) (2)							
Product Model	Radio Bridge				Serial#	Prototype		
Configuration	See test plan for details							
Test Set-up	Tested @ 3m on O.A.T.S. placed on turn-table, see test plans for details							
EUT Powered By	AC/DC Adapter & Batteries	Temp	22°C	Humidity	45%	Pressure	998mbar	
Frequency Range	2.405 GHz - 2.480 GHz @ 3m							
Perf. Criteria	500kHz. (Below Limit)			Perf. Verification		Readings Under Limit		
Mod. to EUT	None			Test Performed By		Dieter Baldamus		

4.1.2 Test Procedure

Radiated and FCC emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 2.405-2.480 GHz was investigated for radiated emissions, testing the lowest middle and highest channels.

Radiated emission testing was first performed at a distance of 3 meters in the semi-anechoic chamber in order to identify the specific frequencies for which these measurements will be made on the 3m OATS.

4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan.

4.1.4 Final Test

All final radiated emissions measurements were below (in compliance) the limits.

4.1.5 Summary of Final Data

NOTES:

Spectrum Bandwidth
Low Frequency
☒ 13:58:31 NOV 07, 2007 1

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE

MARKER Δ

-1.65 MHz

.88 dB

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

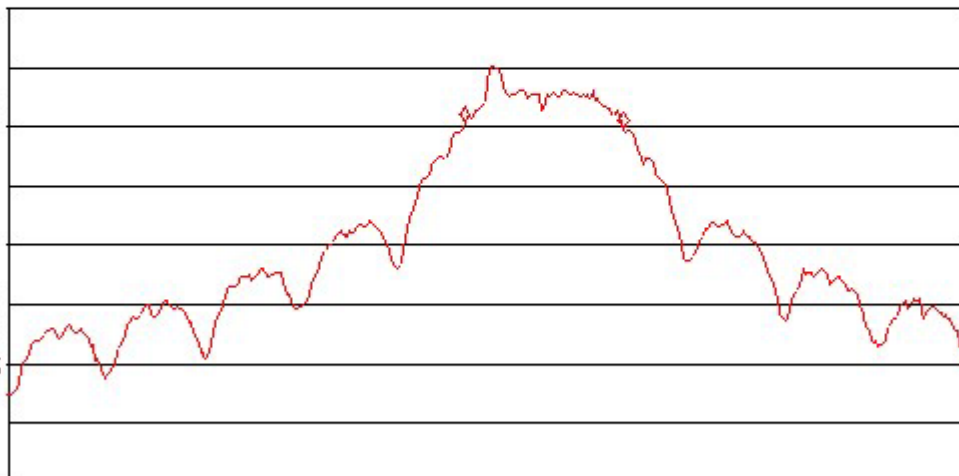
MKR Δ -1.65 MHz

.88 dB

LOG REF 13.0 dBm

PREAMP ON

 10
 dB/
 #ATTN
 50 dB

 MA SB
 SC FC
 ACORR


CENTER 2.40443 GHz

SPAN 10.00 MHz

#IF BW 100 kHz

#AUG BW 100 kHz

SWP 20.0 msec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3109 Bicon☐ CBL6140 X-Wing☐ NNB-4/63TL LISN☐ 3146 Log Per☐ 3115 Horn☐ JB3 Bilog☐ NNB-4/200X LISN☐ 3106 Horn☐ CBL6112B Bilog☐ NSLK 8126 LISN☐ MDS-21 Clamp**MEAS TYPE:**☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____**POLARIZATION:**☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NA**DISTANCE:**☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NA**LOCATION:**☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

**Spectrum Bandwidth
Middle Frequency**
 14:34:41 NOV 07, 2007

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE

MARKER Δ

-1.60 MHz

-.02 dB

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

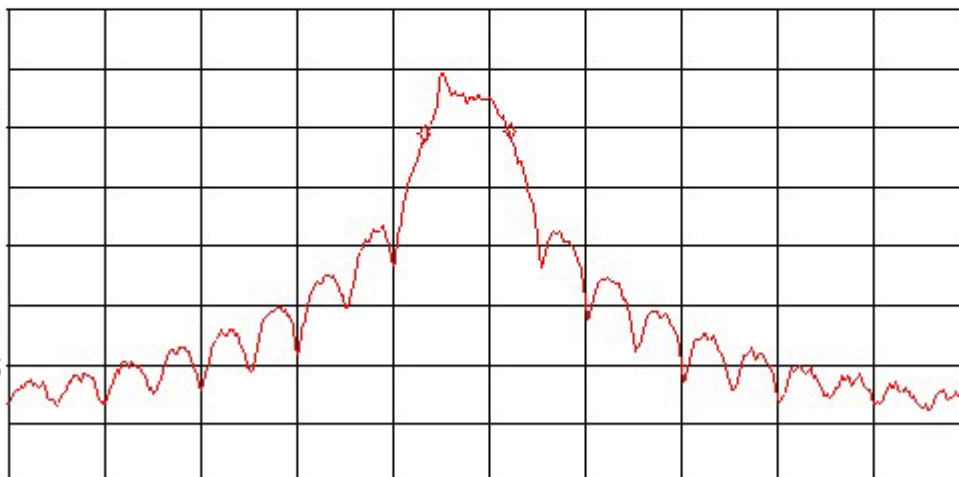
MKR Δ -1.60 MHz

-.02 dB

LOG REF 13.0 dBm

PREAMP ON

 10
dB/
ATTN
50 dB

 MA SB
SC FC
CORR


CENTER 2.46050 GHz

SPAN 20.00 MHz

#1F BW 100 kHz

#AVG BW 100 kHz

SWP 20.0 msec

ANTENNA/COUPLER:

- ☐
- 9124 Bicon
-
- ☐
- 3146 Log Per
-
- ☐
- 3106 Horn

- ☐
- 3109 Bicon
-
- ☐
- 3115 Horn
-
- ☐
- CBL6112B Bilog

- ☐
- CBL6140 X-Wing
-
- ☐
- JB3 Bilog
-
- ☐
- NSLK 8126 LISN

- ☐
- NNB-4/63TL LISN
-
- ☐
- NNB-4/200X LISN
-
- ☐
- MDS-21 Clamp

MEAS TYPE:

- ☒
- Radiated Prescan
-
- ☐
- Radiated Final
-
- ☐
- Conducted
-
- ☐
- Disturbance Power
-
- ☐
- Other _____

POLARIZATION:

- ☒
- Vertical
-
- ☒
- Horizontal
-
- ☐
- Line
-
- ☐
- Neutral
-
- ☐
- NA

DISTANCE:

- ☒
- 3 Meter
-
- ☐
- 10 Meter
-
- ☐
- _____ Meter
-
- ☐
- NA

LOCATION:

- ☐
- OATS
-
- ☐
- Semi-Anechoic
-
- ☒
- Shielded Room
-
- ☐
- Factory Floor
-
- ☐
- Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

**Spectrum Bandwidth
High Frequency**
 14:50:24 NOV 07, 2007

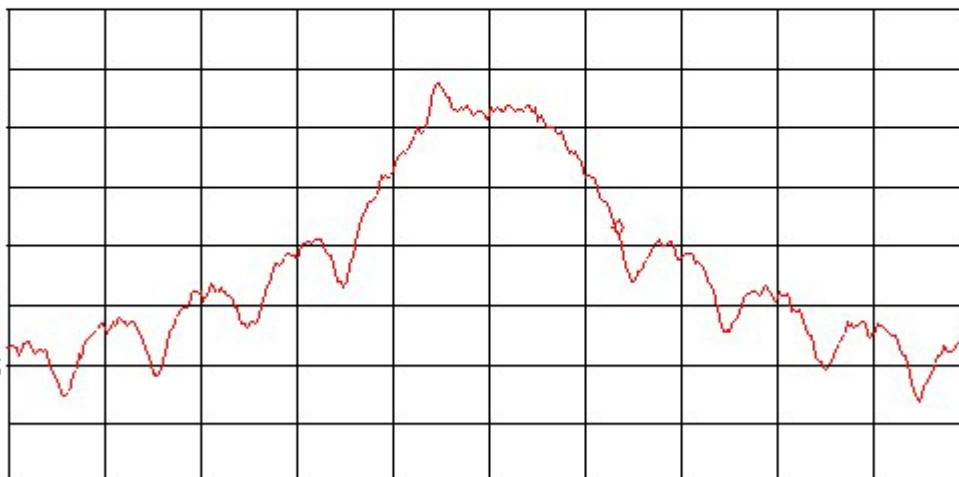
MARKER
2.48135 GHz
63.48 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.48135 GHz
63.48 dB μ V

LOG REF 122.0 dB μ V

10
dB/
ATTN
40 dB

MA SB
SC FC
CORR



CENTER 2.48000 GHz

#JF BW 100 kHz

#AVG BW 100 kHz

SPAN 10.00 MHz

SWP 20.0 msec

ANTENNA/COUPLER:

☐ 9124 Bicon
☐ 3146 Log Per
☐ 3106 Horn

☐ 3109 Bicon
☐ 3115 Horn
☐ CBL6112B Bilog

☐ CBL6140 X-Wing
☐ JB3 Bilog
☐ NSLK 8126 LISN

☐ NNB-4/63TL LISN
☐ NNB-4/200X LISN
☐ MDS-21 Clamp

MEAS TYPE:

☒ Radiated Prescan
☐ Radiated Final
☐ Conducted
☐ Disturbance Power
☐ Other _____

POLARIZATION:

☒ Vertical
☒ Horizontal
☐ Line
☐ Neutral
☐ NA

DISTANCE:

☒ 3 Meter
☐ 10 Meter
☐ _____ Meter
☐ NA

LOCATION:

☐ OATS
☐ Semi-Anechoic
☒ Shielded Room
☐ Factory Floor
☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.1.6 Tabulated Test Data

Radiated Emissions Measurements						
Standard:	47 CFR 15.247 (a) (2)				Date:	11/7/2007
Device Tested:	Sensor Switch - Radio Bridge				File:	07110701- 6dB Bandwidth.xls
Meas #	Freq (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Minimum Limit ☐ (Average + Correction Factors - Limit)	Result	Comment
Channel 1 (2410GHz)	2404.43	1.6500	0.5000	-1.15	Complied	
Channel 8 (2450GHz)	2444.60	1.8500	0.5000	-1.35	Complied	
Channel 15 (2480GHz)	2480.50	1.8000	0.5000	-1.30	Complied	
Tested by:	Dieter Baldamus					
TUV Rheinland of North America, Inc. 12 Commerce Road Newtown, CT 06470 Tel:(203) 426-0888 Fax: (203) 426-4009						

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.1.7 Photos



Figure 3 - Radiated Emissions Test Setup (Semi-Anechoic Chamber 2)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.2 Maximum Output Power

This test measures the radiated electromagnetic levels of the intentional radiator generated by the EUT through the antenna port.

4.2.1 Over View of Test

Results	Complies (as tested per this report)					Date	07/0/2007
Standard	FCC Part 15.247 (a) (2)						
Product Model	Radio Bridge			Serial#	Prototype		
Configuration	See test plan for details						
Test Set-up	Tested in shielded room		EUT placed on table		see test plans for details		
EUT Powered By	AC/DC Adapter & Batteries	Temp	22°C	Humidity	45%	Pressure	998mbar
Frequency Range	2.405GHz - 2.480GHz @ 3m						
Perf. Criteria	1 Watt (30dBm) (Bellow Limit)	Perf. Verification		Readings Under Limit for L1 and L2			
Mod. to EUT	None	Test Performed By		Dieter Baldamus			

4.2.2 Test Procedure

Radiated emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 2.405-2.480 GHz was investigated for radiated emissions, testing the lowest middle and highest channels.

Radiated emission testing was first performed at a distance of 3 meters in the semi-anechoic chamber in order to identify the specific frequencies for which these measurements will be made on the 3m OATS.

4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan.

4.2.4 Final Test

All final radiated emissions measurements were below (in compliance) the limits.

4.2.5 Summary of Final Data

NOTES:

Duty Cycle Measurement

 15:12:06 NOV 07, 2007

 MARKER Δ
 10.875 msec
 -2.15 dB

 ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 10.875 msec
 -2.15 dB

LOG REF 13.0 dBm

PREAMP ON

 10
 dB/
 ATN
 50 dB

 VA SB
 SC FC
 CORR

CENTER 2.444550 GHz

SPAN 0 Hz

#JF BW 100 kHz

#AVG BW 100 kHz

#SWP 15.0 msec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3109 Bicon☐ CBL6140 X-Wing☐ NNB-4/63TL LISN☐ 3146 Log Per☒ 3115 Horn☐ JB3 Bilog☐ NNB-4/200X LISN☐ 3106 Horn☐ CBL6112B Bilog☐ NSLK 8126 LISN☐ MDS-21 ClampMEAS TYPE:☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance

Power

☐

Other

POLARIZATION:☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NADISTANCE:☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NALOCATION:☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Duty Cycle Measurement

 15:12:40 NOV 07, 2007

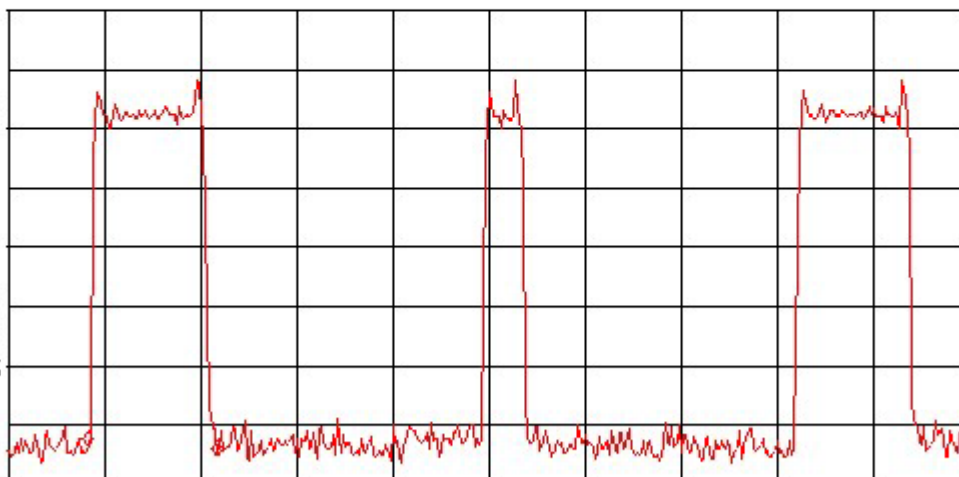
 MARKER Δ
 2.0250 msec
 -1.75 dB

 ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 2.0250 msec
 -1.75 dB

LOG REF 13.0 dBm

PREAMP ON

 10
 dB/
 ATN
 50 dB

 VA SB
 SC FC
 CORR


CENTER 2.444550 GHz

SPAN 0 Hz

#JF BW 100 kHz

#AVG BW 100 kHz

#SWP 15.0 msec

ANTENNA/COUPLER:

- ☐
- 9124 Bicon
-
- ☐
- 3146 Log Per
-
- ☐
- 3106 Horn

- ☐
- 3109 Bicon
-
- ☒
- 3115 Horn
-
- ☐
- CBL6112B Bilog

- ☐
- CBL6140 X-Wing
-
- ☐
- JB3 Bilog
-
- ☐
- NSLK 8126 LISN

- ☐
- NNB-4/63TL LISN
-
- ☐
- NNB-4/200X LISN
-
- ☐
- MDS-21 Clamp

MEAS TYPE:

- ☒
- Radiated Prescan
-
- ☐
- Radiated Final
-
- ☐
- Conducted
-
- ☐
- Disturbance Power
-
- ☐
- Other _____

POLARIZATION:

- ☒
- Vertical
-
- ☒
- Horizontal
-
- ☐
- Line
-
- ☐
- Neutral
-
- ☐
- NA

DISTANCE:

- ☒
- 3 Meter
-
- ☐
- 10 Meter
-
- ☐
- _____ Meter
-
- ☐
- NA

LOCATION:

- ☐
- OATS
-
- ☐
- Semi-Anechoic
-
- ☒
- Shielded Room
-
- ☐
- Factory Floor
-
- ☐
- Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

**Maximum Output Power
Low Frequency**
 14:24:49 NOV 07, 2007

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE

MARKER

2.40446 GHz

3.77 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

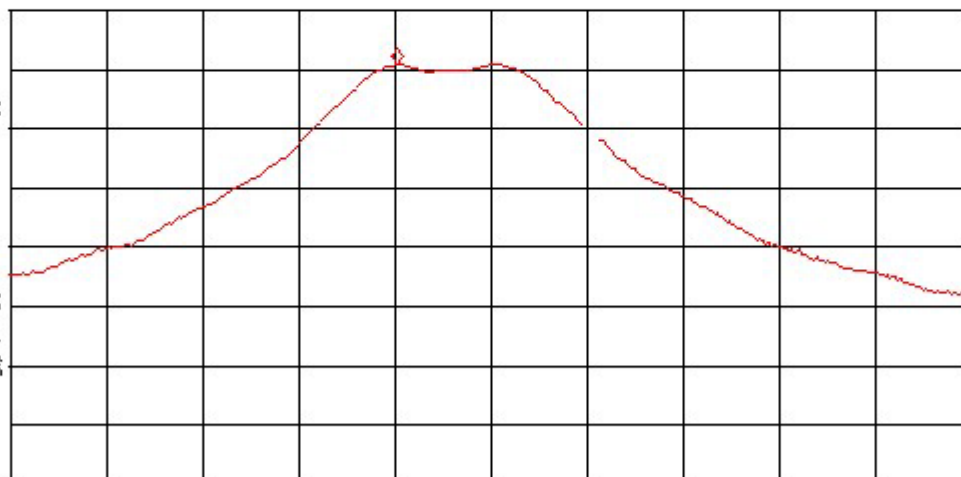
MKR 2.40446 GHz

3.77 dBm

LOG REF 13.0 dBm

PREAMP ON

 10
dB/
ATTN
50 dB

 MA SB
SC FC
CORR


CENTER 2.40545 GHz

#JF BW 1.0 MHz

#AVG BW 3 MHz

SPAN 10.00 MHz

#SWP 500 msec

ANTENNA/COUPLER:

- ☐
- 9124 Bicon
-
- ☐
- 3146 Log Per
-
- ☐
- 3106 Horn

- ☐
- 3109 Bicon
-
- ☒
- 3115 Horn
-
- ☐
- CBL6112B Bilog

- ☐
- CBL6140 X-Wing
-
- ☐
- JB3 Bilog
-
- ☐
- NSLK 8126 LISN

- ☐
- NNB-4/63TL LISN
-
- ☐
- NNB-4/200X LISN
-
- ☐
- MDS-21 Clamp

MEAS TYPE:

- ☒
- Radiated Prescan
-
- ☐
- Radiated Final
-
- ☐
- Conducted
-
- ☐
- Disturbance Power
-
- ☐
- Other _____

POLARIZATION:

- ☒
- Vertical
-
- ☒
- Horizontal
-
- ☐
- Line
-
- ☐
- Neutral
-
- ☐
- NA

DISTANCE:

- ☒
- 3 Meter
-
- ☐
- 10 Meter
-
- ☐
- _____ Meter
-
- ☐
- NA

LOCATION:

- ☐
- OATS
-
- ☐
- Semi-Anechoic
-
- ☒
- Shielded Room
-
- ☐
- Factory Floor
-
- ☐
- Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

**Maximum Output Power
Middle Frequency**
 15:06:35 NOV 07, 2007

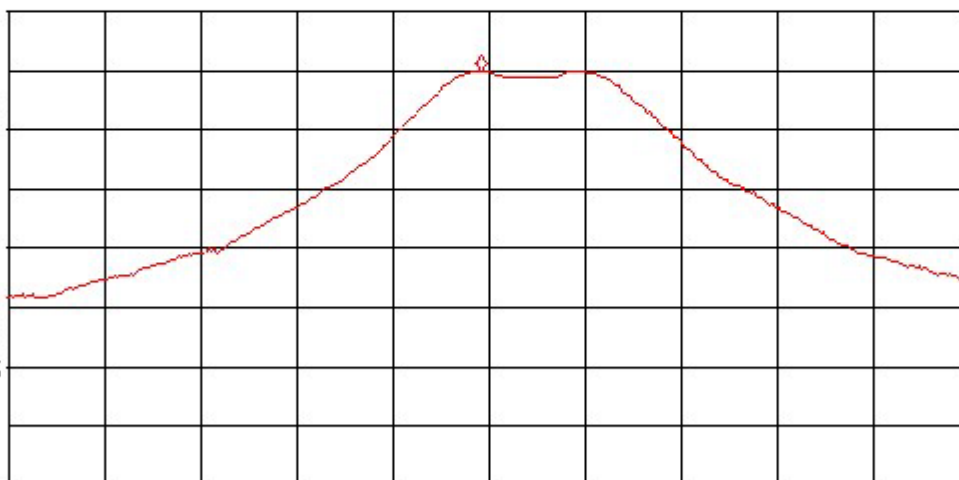
 MARKER
 2.44446 GHz
 2.66 dBm

 ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 2.44446 GHz
 2.66 dBm

LDG REF 13.0 dBm

PREAMP DN

 10
 dB/
 ATN
 50 dB

 MA SB
 SC FC
 CORR


CENTER 2.44455 GHz

#1F BW 1.0 MHz

#AVG BW 3 MHz

SPAN 10.00 MHz

SWP 20.0 msec

ANTENNA/COUPLER:

- ☐
- 9124 Bicon
-
- ☐
- 3146 Log Per
-
- ☐
- 3106 Horn

- ☐
- 3109 Bicon
-
- ☒
- 3115 Horn
-
- ☐
- CBL6112B Bilog

- ☐
- CBL6140 X-Wing
-
- ☐
- JB3 Bilog
-
- ☐
- NSLK 8126 LISN

- ☐
- NNB-4/63TL LISN
-
- ☐
- NNB-4/200X LISN
-
- ☐
- MDS-21 Clamp

MEAS TYPE:

- ☒
- Radiated Prescan
-
- ☐
- Radiated Final
-
- ☐
- Conducted
-
- ☐
- Disturbance Power
-
- ☐
- Other _____

POLARIZATION:

- ☒
- Vertical
-
- ☒
- Horizontal
-
- ☐
- Line
-
- ☐
- Neutral
-
- ☐
- NA

DISTANCE:

- ☒
- 3 Meter
-
- ☐
- 10 Meter
-
- ☐
- _____ Meter
-
- ☐
- NA

LOCATION:

- ☐
- OATS
-
- ☐
- Semi-Anechoic
-
- ☒
- Shielded Room
-
- ☐
- Factory Floor
-
- ☐
- Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

**Maximum Output Power
High Frequency**
 14:29:56 NOV 07, 2007

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE

MARKER

2.48050 GHz

2.75 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 2.48050 GHz

2.75 dBm

LDG REF 13.0 dBm

PREAMP ON

 10
dB/
ATTN
50 dB

 MA SB
SC FC
CORR


CENTER 2.48050 GHz

#1F BW 1.0 MHz

#AVG BW 3 MHz

SPAN 20.00 MHz

SWP 20.0 msec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3146 Log Per☐ 3106 Horn☐ 3109 Bicon☒ 3115 Horn☐ CBL6112B Bilog☐ CBL6140 X-Wing☐ JB3 Bilog☐ NSLK 8126 LISN☐ NNB-4/63TL LISN☐ NNB-4/200X LISN☐ MDS-21 Clamp**MEAS TYPE:**☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____**POLARIZATION:**☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NA**DISTANCE:**☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NA**LOCATION:**☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.2.6 Tabulated Test Data

Radiated Emissions Measurements										
Standard:	47 CFR 15.247(b) (3)				Prescan/Final:		Final			Date: 11/7/2007
Device Tested:	Sensor Switch - Radio Bridge				Distance:		0m, Direct Measurement			File: 07110707 Max Power.xls
Meas #	Freq (MHz)	Measured Peak (dBm)	Cable Correction Factor	Duty Cycle	Antenna Gain	Corrected Measured Average (dBm)	Peak Limit 1 Watt (30dBm)	Peak (dB) ☐	e.i.r.p. Peak Power (dBm)	Comment
Channel 1 (2.405GHz)	2404.48	3.60	1.00	-5.51	2.14	1.23	30.00	-28.77	Complied	
Channel 8 (2.444GHz)	2445.48	2.73	1.00	-5.51	2.14	0.36	30.00	-29.64	Complied	
Channel 15 (2.480GHz)	2480.24	2.86	1.00	-5.51	2.14	0.49	30.00	-29.51	Complied	
Tested by:	Dieter Baldamus									
TUV Rheinland of North America, Inc. 12 Commerce Road				Newtown, CT 06470		Tel:(203) 426-0888		Fax: (203) 426-4009		

Average Values were calculated based on the duty cycle of the transmission frequency

Measured Duty Cycle is 2.025ms + 0.787ms in 10ms

Duty Cycle = Tx ON/(TxON+TxOFF)

Duty Cycle 28.12%

in dB -5.509847

Average Value = Peak Value (in dBm) - Duty Cycle

Duty Cycle = $10 \log(0.2812) = -5.50985$

Corrected Measured Peak (dBm) = Measured Peak + Correction Factor+ Duty Cycle+ Antenna Gain

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

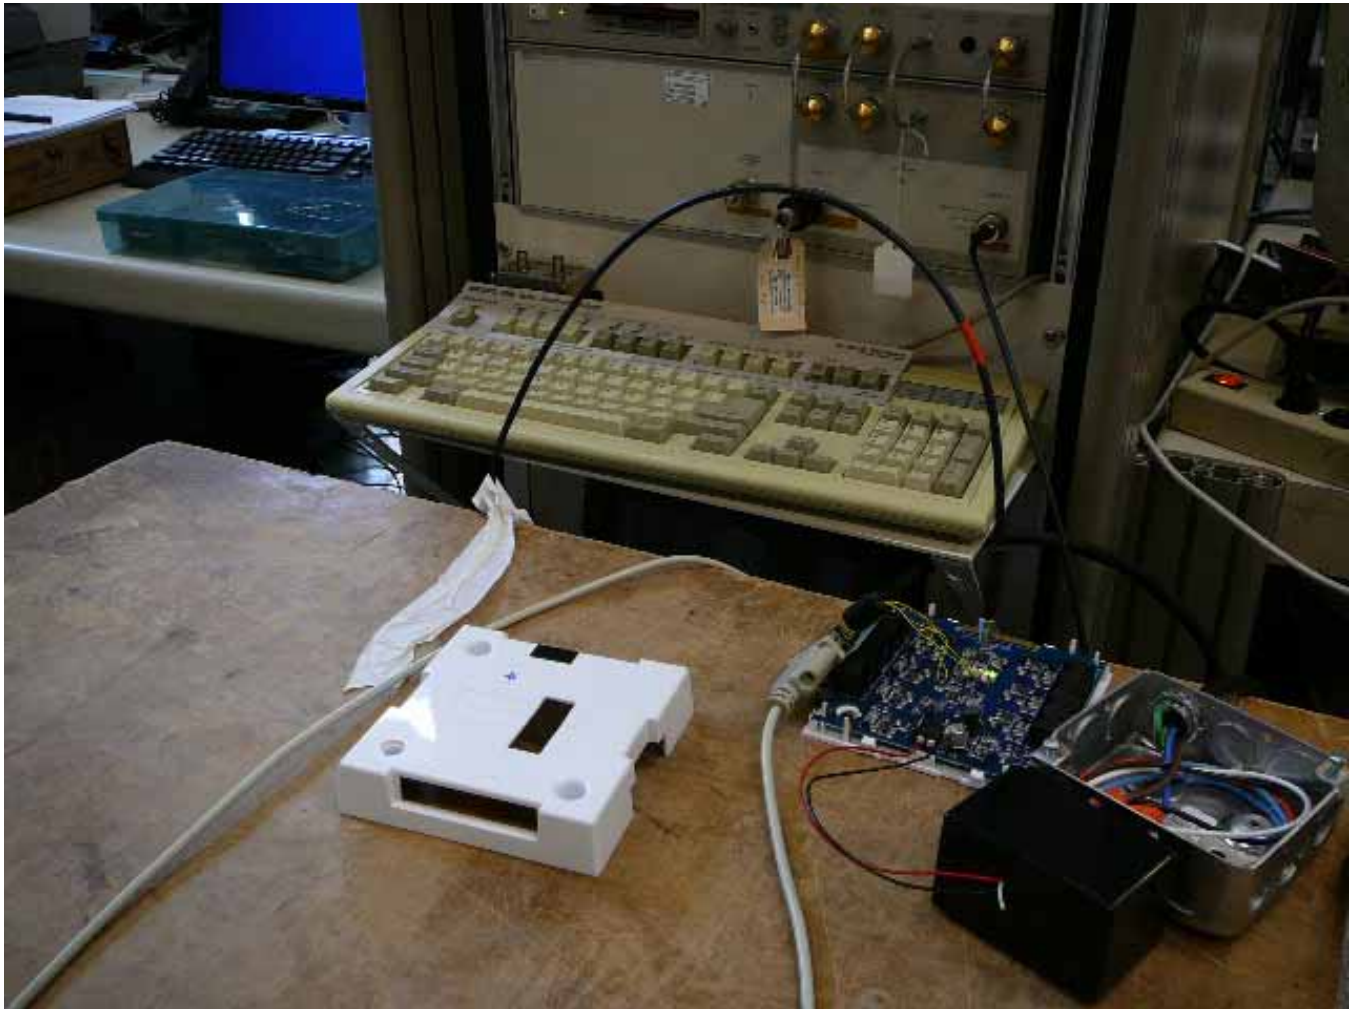


Figure 4 – Maximum Output Power (Semi-Anechoic Chamber 2)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.3 RF Human Exposure Limits

This test evaluates the potential for the EUT currents to be injected into the public supply system and cause distortion on the AC power lines.

4.3.1 Test Over View

Results	Complies (as tested per this report)				Date	08/10/207	
Standard	FCC Part 15.247 (b)(5) and 1.1310						
Product Model	Radio Bridge			Serial#	Protoype		
Configuration	See test plan for details						
Test Set-up	Tested in shielded room			EUT placed on table			
EUT Powered By	AC/DC Adapter & Batteries	Temp	22°C	Humidity	45%	Pressure	998mbar
Frequency Range	2.405GHz - 2.480GHz @ 3m						
Perf. Criteria	1.0 (mW/cm2) (Bellow Limit)		Perf. Verification		Readings under Limit		
Mod to EUT	None		Test Performed By		Dieter Baldamus		

4.3.2 Test Procedure

The maximum input power was measured. Then the minimum distance to the radiator was calculated based on the following formula:

$$S = PG / 4\pi r^2 = EIRP / 4\pi r^2 \text{ where:}$$

P: Power Input to the antenna in mW

EIRP: Equivalent (effective) isotropic radiated power.

S: power density mW/cm² (1.0 according to the maximum permissible exposure limits (MPE) stated in the FCC standard.

G: Numeric Gain of antenna relative to isotropic radiator

r: Distance to centre of radiation in cm

$$r = \sqrt{PG / 4\pi S}$$

4.3.3 Deviations

There were no deviations from the test methodology listed in the test plan.

4.3.4 Final Test

The distance of the antenna is greater than the calculated in r. Therefore the FCC radio frequency exposure limits are not exceeded.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.3.5 Tabulated Test Data

Radiated Emissions Measurements									
Standard:	47 CFR 15.247(b) (5) and 1.1310						Date:	11/7/2007	
Device Tested:	Sensro Switch - Radio Bridge						File:	07110707 RF Exposure	
Meas #	Freq (MHz)	Measured Peak (dBm)	Cable Correction Factor	Duty Cycle	Total Average EIRP (dBm)	Total Average EIRP (mW)	S Max Exposure Limit (mW2/cm)	Safety Distance (cm)	Comment
Channel 1 (2410GHz)	2404.48	3.60	1.00	-5.51	-0.91	0.81	1.00	0.254	Maximum Safety Distance
Channel 8 (2450GHz)	2445.48	2.73	1.00	-5.51	-1.78	0.66	1.00	0.230	
Channel 15 (2480GHz)	2480.24	2.86	1.00	-5.51	-1.65	0.68	1.00	0.233	
Tested by:	Dieter Baldamus								
TUV Rheinland of North America, Inc. 12 Commerce Road Newtown, CT 06470 Tel:(203) 426-0888 Fax: (203) 426-4009									

Average Values were calculated based on the duty cycle of the transmission frequency

Measured Duty Cycle is 2.025ms + 0.787ms in 10ms

Duty Cycle = Tx ON/(TxON+TxOFF)

Duty Cycle = 28.12%

in dB = -5.509847

Total Average EIRP = Measured Peak (in dBm) + Cable Correction Factor - Duty Cycle

Safety Distance = $\sqrt{E/(4*\pi*S)}$ = $\sqrt{\text{Total Average EIRP}/(4*3.1416*\text{Max Exposure Limit})}$

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.4 Radiated Spurious Emissions

This test measures the radiated electromagnetic levels of the intentional and unintentional radiator generated by the EUT.

4.4.1 Test Over View

Results	Complies (as tested per this report)				Date	10/09/2007	
Standard	FCC Part 15.247 (c), 15.205, 15.209						
Product Model	Radio Bridge			Serial#	Prototype		
Configuration	See test plan for details						
Test Set-up	Tested in shielded room EUT placed on table						
EUT Powered By	AC/DC Adapter & Batteries	Temp	22°C	Humidity	45%	Pressure	998mbar
Frequency Range	2.405GHz - 2.480GHz @ 3m						
Perf. Criteria	-20dBc, 15.205 (a), 15.209 (a)			Perf. Verification	Readings under Limit		
Mod to EUT	None			Test Performed By	Dieter Baldamus		

4.4.2 Test Procedure

Radiated and FCC emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 2.405-2.480 GHz was investigated for radiated emissions, testing the lowest middle and highest channels.

Radiated emission testing was first performed at a distance of 3 meters in the semi-anechoic chamber in order to identify the specific frequencies for which these measurements will be made on the 3m OATS.

4.4.3 Deviations

There were no deviations from the test methodology listed in the test plan.

4.4.4 Final Test

The Voltage Fluctuations & Flicker of the EUT were below the limits specified in the standard. The EUT complies with 24dmax requirements for manual switching.

4.4.5 Summary of Final Data

NOTES:

Radiated Emissions Prescan

09:44:59 NOV 07, 2007

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE

MARKER

125.4 MHz

39.20 dB μ V/m

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 125.4 MHz

39.20 dB μ V/mLOG REF 60.0 dB μ V/m

PREAMP ON

10
dB/
#ATTN
0 dBVA VB
SC FC
ACORR

START 30.0 MHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 300.0 MHz

SWP 253 msec

ANTENNA/COUPLER:

- ☐
- 9124 Bicon
-
- ☐
- 3146 Log Per
-
- ☐
- 3106 Horn

- ☐
- 3109 Bicon
-
- ☐
- 3115 Horn
-
- ☐
- CBL6112B Bilog

- ☐
- CBL6140 X-Wing
-
- ☐
- JB3 Bilog
-
- ☐
- NSLK 8126 LISN

- ☐
- NNB-4/63TL LISN
-
- ☐
- NNB-4/200X LISN
-
- ☐
- MDS-21 Clamp

MEAS TYPE:

- ☒
- Radiated Prescan
-
- ☐
- Radiated Final
-
- ☐
- Conducted
-
- ☐
- Disturbance Power
-
- ☐
- Other _____

POLARIZATION:

- ☒
- Vertical
-
- ☒
- Horizontal
-
- ☐
- Line
-
- ☐
- Neutral
-
- ☐
- NA

DISTANCE:

- ☒
- 3 Meter
-
- ☐
- 10 Meter
-
- ☐
- _____ Meter
-
- ☐
- NA

LOCATION:

- ☐
- OATS
-
- ☐
- Semi-Anechoic
-
- ☒
- Shielded Room
-
- ☐
- Factory Floor
-
- ☐
- Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan
☒ 09:49:11 NDV 07, 2007

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE

MARKER

301.2 MHz

50.52 dB μ V/m

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 301.2 MHz

50.52 dB μ V/mLOG REF 60.0 dB μ V/m

PREAMP ON

 10
 dB/
 #ATTN
 0 dB

 VA VB
 SC FC
 ACORR

START 300.0 MHz

IF BW 120 kHz

AUG BW 300 kHz

STOP 1.0000 GHz

SWP 656 msec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3146 Log Per☐ 3106 Horn☐ 3109 Bicon☐ 3115 Horn☐ CBL6112B Bilog☐ CBL6140 X-Wing☐ JB3 Bilog☐ NSLK 8126 LISN☐ NNB-4/63TL LISN☐ NNB-4/200X LISN☐ MDS-21 Clamp**MEAS TYPE:**☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____**POLARIZATION:**☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NA**DISTANCE:**☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NA**LOCATION:**☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan
☒ 09:55:54 NDV 07, 2007

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE

MARKER

1.078 GHz

35.60 dB μ V/m

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 1.078 GHz

35.60 dB μ V/mLOG REF 60.0 dB μ V/m

PREAMP ON

 10
 dB/
 #ATN
 0 dB

 VA VB
 SC FC
 ACORR

START 1.000 GHz

IF BW 1.0 MHz

AUG BW 3 MHz

STOP 2.000 GHz

SWP 20.0 msec

ANTENNA/COUPLER:

- ☐
- 9124 Bicon
-
- ☐
- 3146 Log Per
-
- ☐
- 3106 Horn

- ☐
- 3109 Bicon
-
- ☐
- 3115 Horn
-
- ☐
- CBL6112B Bilog

- ☐
- CBL6140 X-Wing
-
- ☐
- JB3 Bilog
-
- ☐
- NSLK 8126 LISN

- ☐
- NNB-4/63TL LISN
-
- ☐
- NNB-4/200X LISN
-
- ☐
- MDS-21 Clamp

MEAS TYPE:

- ☒
- Radiated Prescan
-
- ☐
- Radiated Final
-
- ☐
- Conducted
-
- ☐
- Disturbance Power
-
- ☐
- Other _____

POLARIZATION:

- ☒
- Vertical
-
- ☒
- Horizontal
-
- ☐
- Line
-
- ☐
- Neutral
-
- ☐
- NA

DISTANCE:

- ☒
- 3 Meter
-
- ☐
- 10 Meter
-
- ☐
- _____ Meter
-
- ☐
- NA

LOCATION:

- ☐
- OATS
-
- ☐
- Semi-Anechoic
-
- ☒
- Shielded Room
-
- ☐
- Factory Floor
-
- ☐
- Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan

10:36:23 07 NOV 2007

MFR

REF 900 dBµV

AT 10 dB

MKR 2.2217 GHz

46.29 dBµV

PEAK

LOG

10

dB/

DL

57.0

dBµV

MA VB

SC FC

CORR

START 2.000 GHz

RES BW 3.0 MHz

VBW 1 MHz

STOP 2.450 GHz

SWP 200 msec

 EMC ANALYZER 85712D REV A.0001
 (c)HP 1987 - 1992

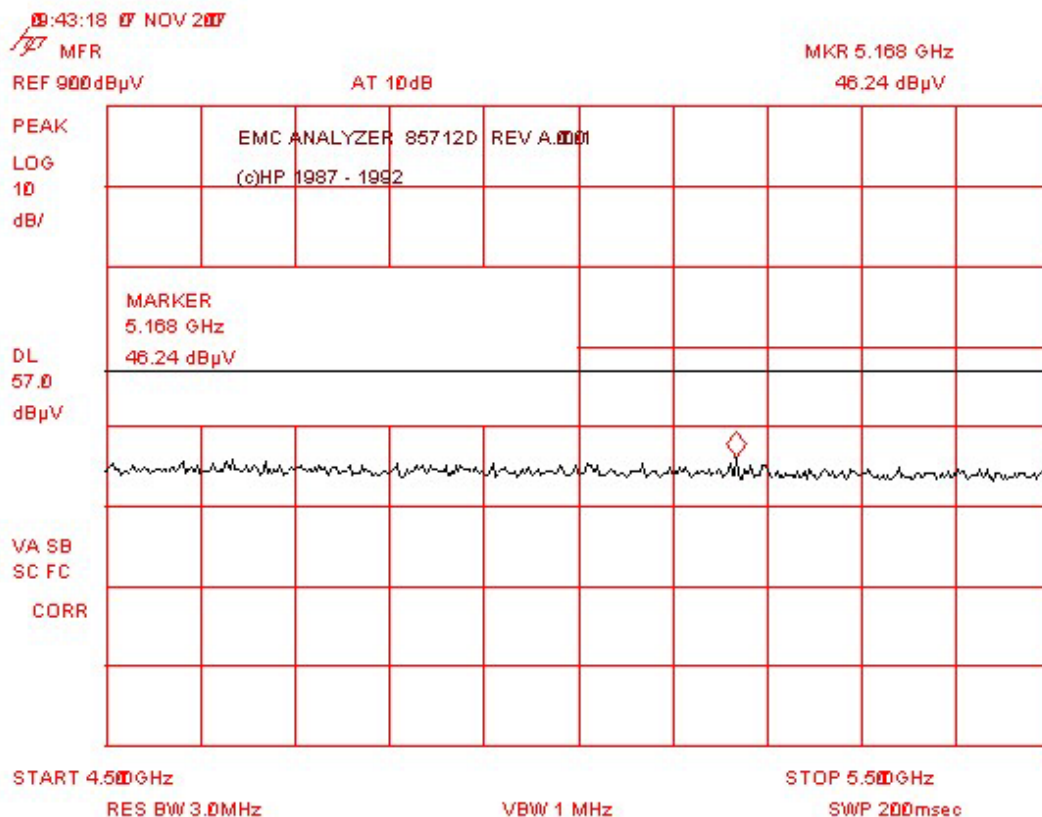
 MARKER
 2.2217 GHz
 46.29 dBµV

SRQ 140

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3146 Log Per☐ 3106 Horn☐ 3109 Bicon☐ 3115 Horn☐ CBL6112B Bilog☐ CBL6140 X-Wing☐ JB3 Bilog☐ NSLK 8126 LISN☐ NNB-4/63TL LISN☐ NNB-4/200X LISN☐ MDS-21 ClampMEAS TYPE:☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____POLARIZATION:☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NADISTANCE:☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NALOCATION:☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan**ANTENNA/COUPLER:**
☐ 9124 Bicon
☐ 3146 Log Per
☐ 3106 Horn

☐ 3109 Bicon
☒ 3115 Horn
☐ CBL6112B Bilog

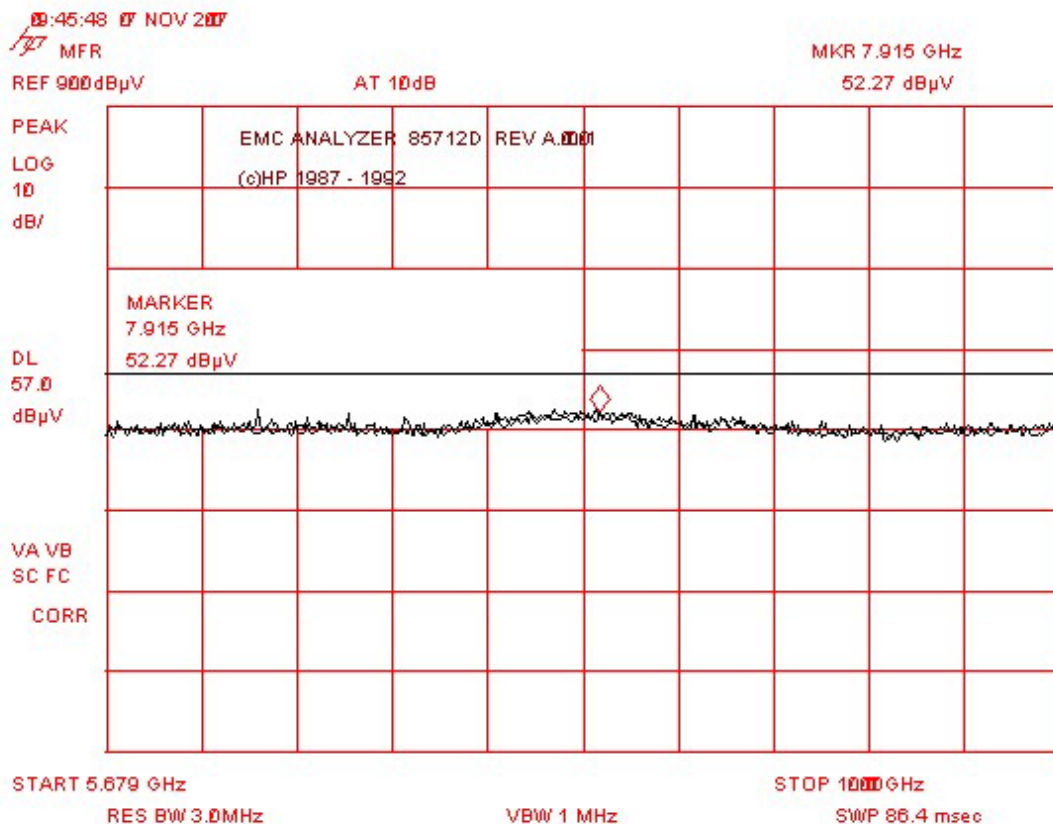
☐ CBL6140 X-Wing
☐ JB3 Bilog
☐ NSLK 8126 LISN

☐ NNB-4/63TL LISN
☐ NNB-4/200X LISN
☐ MDS-21 Clamp
MEAS TYPE:
☒ Radiated Prescan
☐ Radiated Final
☐ Conducted
☐ Disturbance Power
☐ Other _____
POLARIZATION:
☒ Vertical
☒ Horizontal
☐ Line
☐ Neutral
☐ NA
DISTANCE:
☒ 3 Meter
☐ 10 Meter
☐ _____ Meter
☐ NA
LOCATION:
☐ OATS
☐ Semi-Anechoic
☒ Shielded Room
☐ Factory Floor
☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan

**ANTENNA/COUPLER:**

- | | | | |
|---------------------------------------|---|---|--|
| ☐ 9124 Bicon | ☐ 3109 Bicon | ☐ CBL6140 X-Wing | ☐ NNB-4/63TL LISN |
| ☐ 3146 Log Per | ☒ 3115 Horn | ☐ JB3 Bilog | ☐ NNB-4/200X LISN |
| ☐ 3106 Horn | ☐ CBL6112B Bilog | ☐ NSLK 8126 LISN | ☐ MDS-21 Clamp |

MEAS TYPE:

- ☒ Radiated Prescan
☐ Radiated Final
☐ Conducted
☐ Disturbance Power
☐ Other _____

POLARIZATION:

- ☒ Vertical
☒ Horizontal
☐ Line
☐ Neutral
☐ NA

DISTANCE:

- ☒ 3 Meter
☐ 10 Meter
☐ _____ Meter
☐ NA

LOCATION:

- ☐ OATS
☐ Semi-Anechoic
☒ Shielded Room
☐ Factory Floor
☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan

10:48:59 07 NOV 2007

MFR

MKR 10938 GHz

REF 900 dBμV

#AT 0 dB

41.99 dBμV

PEAK

EMC ANALYZER 85712D REV A.0001

LOG

(c)HP 1987 - 1992

10

dB/

DL

57.0

dBμV

VA MB

SC FC

CORR

START 10.000 GHz

#RES BW 1.0 MHz

VBW 300 kHz

STOP 13.000 GHz

SWP 600 msec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3146 Log Per☐ 3106 Horn☐ 3109 Bicon☒ 3115 Horn☐ CBL6112B Bilog☐ CBL6140 X-Wing☐ JB3 Bilog☐ NSLK 8126 LISN☐ NNB-4/63TL LISN☐ NNB-4/200X LISN☐ MDS-21 ClampMEAS TYPE:☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____POLARIZATION:☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NADISTANCE:☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NALOCATION:☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan

10:51:22 07 NOV 2007

MFR

MKR 17.290GHz

REF 900dBμV

#AT 0dB

43.32 dBμV

PEAK

LOG

10

dB/

DL

57.0

dBμV

VA MB

SC FC

CORR

START 13.00GHz

#RES BW 1.0MHz

VBW 300kHz

STOP 19.00GHz

SWP 120msec

 EMC ANALYZER 85712D REV A.0001
 (c)HP 1987 - 1992

MARKER

17.290GHz

43.32 dBμV

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3146 Log Per☐ 3106 Horn☐ 3109 Bicon☒ 3115 Horn☐ CBL6112B Bilog☐ CBL6140 X-Wing☐ JB3 Bilog☐ NSLK 8126 LISN☐ NNB-4/63TL LISN☐ NNB-4/200X LISN☐ MDS-21 Clamp**MEAS TYPE:**☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____**POLARIZATION:**☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NA**DISTANCE:**☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NA**LOCATION:**☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan

10:53:13 07 NOV 2007

MFR

MKR 19.3422 GHz

REF 900 dBμV

#AT 0 dB

43.55 dBμV

PEAK

EMC ANALYZER 85712D REV A.0001

LOG

(c)HP 1987 - 1992

10

dB/

STOP

19.4786 GHz

DL

57.0

dBμV

MA VB

SC FC

CORR

START 19.000 GHz

#RES BW 1.0MHz

STOP 19.4786 GHz

VBW 300kHz

SWP 200msec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3109 Bicon☐ CBL6140 X-Wing☐ NNB-4/63TL LISN☐ 3146 Log Per☒ 3115 Horn☐ JB3 Bilog☐ NNB-4/200X LISN☐ 3106 Horn☐ CBL6112B Bilog☐ NSLK 8126 LISN☐ MDS-21 ClampMEAS TYPE:☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____POLARIZATION:☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NADISTANCE:☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NALOCATION:☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan

14:43:08 07 NOV 2007

MFR

MKR 7.3340 GHz

REF 100 dBμV

#AT 20 dB

67.0 dBμV

PEAK

EMC ANALYZER 85712D REV A.0001

LOG

(c)HP 1987 - 1992

10

dB/

MARKER

7.3340 GHz

67.0 dBμV

VA SB

SC FC

CORR

CENTER 7.3413 GHz

RES BW 1.0 MHz

VBW 300 kHz

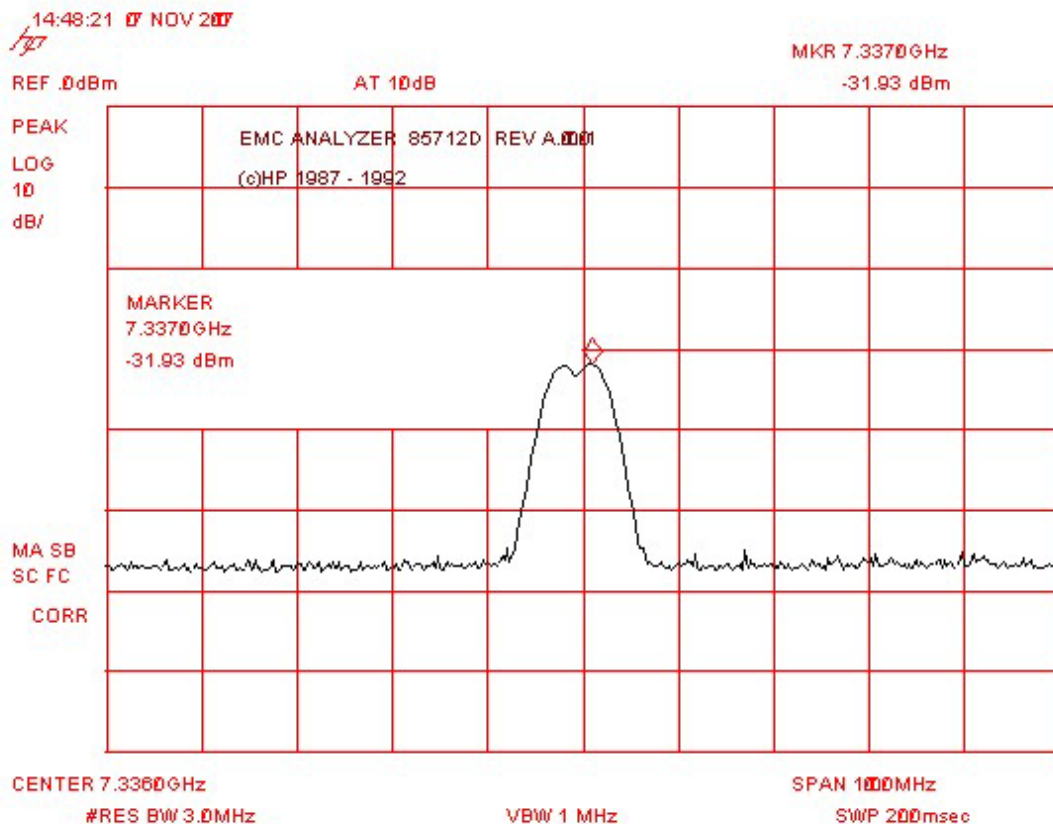
SPAN 100 MHz

SWP 200 msec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3146 Log Per☐ 3106 Horn☐ 3109 Bicon☒ 3115 Horn☐ CBL6112B Bilog☐ CBL6140 X-Wing☐ JB3 Bilog☐ NSLK 8126 LISN☐ NNB-4/63TL LISN☐ NNB-4/200X LISN☐ MDS-21 Clamp**MEAS TYPE:**☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____**POLARIZATION:**☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NA**DISTANCE:**☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NA**LOCATION:**☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan**ANTENNA/COUPLER:**

- | | | | |
|---------------------------------------|---|---|--|
| ☐ 9124 Bicon | ☐ 3109 Bicon | ☐ CBL6140 X-Wing | ☐ NNB-4/63TL LISN |
| ☐ 3146 Log Per | ☒ 3115 Horn | ☐ JB3 Bilog | ☐ NNB-4/200X LISN |
| ☐ 3106 Horn | ☐ CBL6112B Bilog | ☐ NSLK 8126 LISN | ☐ MDS-21 Clamp |

MEAS TYPE:

- ☒ Radiated Prescan
☐ Radiated Final
☐ Conducted
☐ Disturbance Power
☐ Other _____

POLARIZATION:

- ☒ Vertical
☒ Horizontal
☐ Line
☐ Neutral
☐ NA

DISTANCE:

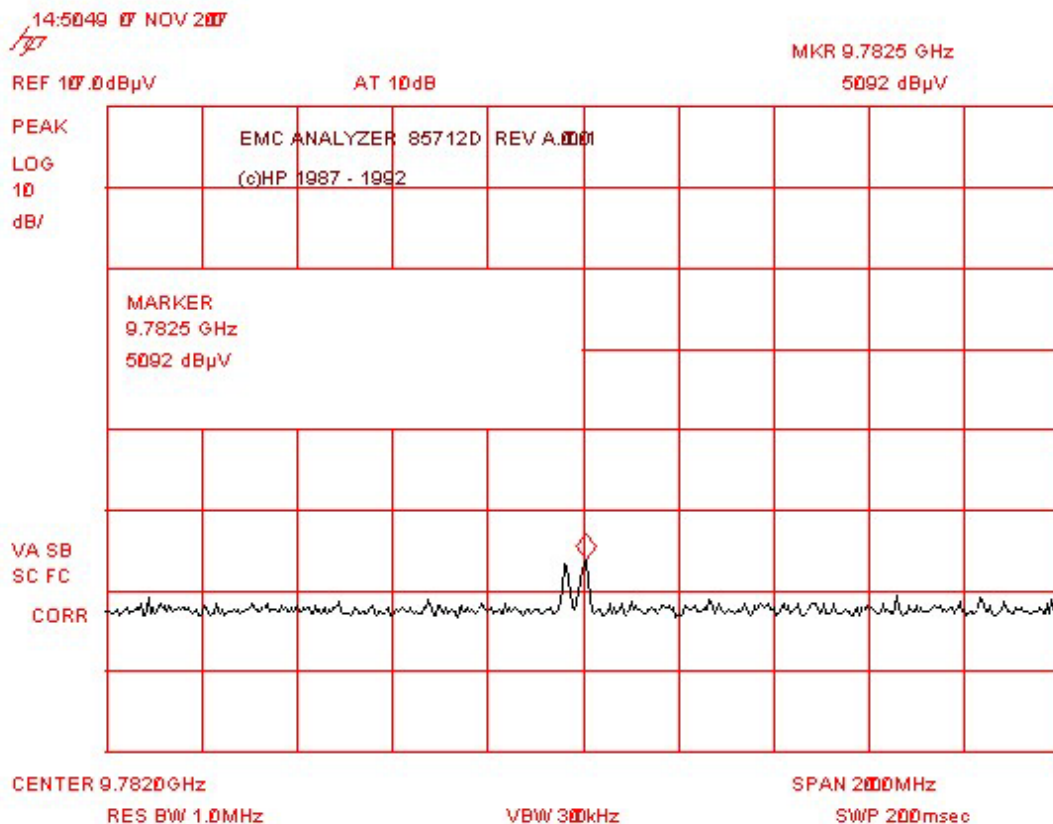
- ☒ 3 Meter
☐ 10 Meter
☐ _____ Meter
☐ NA

LOCATION:

- ☐ OATS
☐ Semi-Anechoic
☒ Shielded Room
☐ Factory Floor
☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan**ANTENNA/COUPLER:**

- | | | | |
|---------------------------------------|---|---|--|
| ☐ 9124 Bicon | ☐ 3109 Bicon | ☐ CBL6140 X-Wing | ☐ NNB-4/63TL LISN |
| ☐ 3146 Log Per | ☒ 3115 Horn | ☐ JB3 Bilog | ☐ NNB-4/200X LISN |
| ☐ 3106 Horn | ☐ CBL6112B Bilog | ☐ NSLK 8126 LISN | ☐ MDS-21 Clamp |

MEAS TYPE:

- ☒ Radiated Prescan
☐ Radiated Final
☐ Conducted
☐ Disturbance Power
☐ Other _____

POLARIZATION:

- ☒ Vertical
☒ Horizontal
☐ Line
☐ Neutral
☐ NA

DISTANCE:

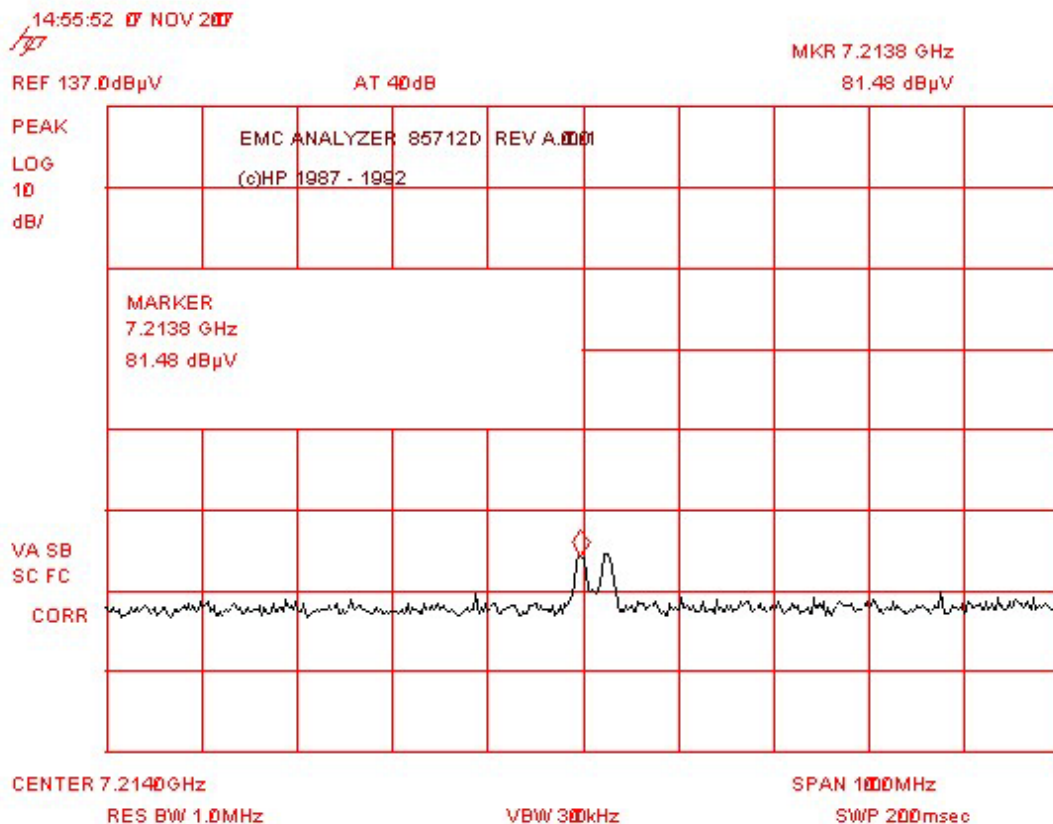
- ☒ 3 Meter
☐ 10 Meter
☐ _____ Meter
☐ NA

LOCATION:

- ☐ OATS
☐ Semi-Anechoic
☒ Shielded Room
☐ Factory Floor
☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Spurious Emissions Prescan**ANTENNA/COUPLER:**

- | | | | |
|---------------------------------------|---|---|--|
| ☐ 9124 Bicon | ☐ 3109 Bicon | ☐ CBL6140 X-Wing | ☐ NNB-4/63TL LISN |
| ☐ 3146 Log Per | ☒ 3115 Horn | ☐ JB3 Bilog | ☐ NNB-4/200X LISN |
| ☐ 3106 Horn | ☐ CBL6112B Bilog | ☐ NSLK 8126 LISN | ☐ MDS-21 Clamp |

MEAS TYPE:

- ☒ Radiated Prescan
☐ Radiated Final
☐ Conducted
☐ Disturbance Power
☐ Other _____

POLARIZATION:

- ☒ Vertical
☒ Horizontal
☐ Line
☐ Neutral
☐ NA

DISTANCE:

- ☒ 3 Meter
☐ 10 Meter
☐ _____ Meter
☐ NA

LOCATION:

- ☐ OATS
☐ Semi-Anechoic
☒ Shielded Room
☐ Factory Floor
☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Tabulated Test Data

Conducted Emission Test						
Standard:	47 CFR 15.247 (c)				Date:	7/26/2007
Device Tested:	Sensor Switch - Radio Bridge				File:	07110704 S.E. Conducted
Meas #	Freq (GHz)	RF Peak Level (dBμV)	-20dBc Limit (dBm)	Margin H (Average + Correction Factors - Limit)	Result	Comment
Lower Channel						
1	2.4046	109.82				
2	2.4000	64.60	89.82	-25.22	Complied	at bandedge
3	4.8091	68.31	89.82	-21.51	Complied	2nd Harmonic
4	7.2140	81.48	89.82	-8.34	Complied	3rd Harmonic
5	9.7825	56.86	89.82	-32.96	Complied	4th Harmonic
Middle Channel						
6	2.4445	109.17				
7	4.8910	63.45	89.17	-25.72	Complied	2nd Harmonic
8	7.3369	75.07	89.17	-14.10	Complied	3rd Harmonic
9	9.7825	50.10	89.17	-39.07	Complied	4th Harmonic
High Channel						
10	2.4805	109.27			Complied	
11	2.4835	64.39	89.27	-24.88	Complied	at bandedge
12	4.9593	51.94	89.27	-37.33	Complied	2nd Harmonic
13	7.4414	71.54	89.27	-17.73	Complied	3rd Harmonic
14	9.9186	47.09	89.27	-42.18	Complied	4th Harmonic
Tested by: Dieter Baldamus						
TUV Rheinland of North America, Inc. 12 Commerce Road Newtown, CT 06470 Tel:(203) 426-0888 Fax: (203) 426-4009						

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.4.6 Photos



Figure 5 - Radiated Spurious Emissions Test Setup (Semi-Anechoic Chamber 2)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.



Figure 6 - Radiated Spurious Emissions Test Setup (Radiated Prescan- Semi Anechoic Chamber)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.



Figure 7 - Radiated Spurious Emissions Test Setup (Radiated Final Test - OATS)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.5 Transmitter Power Density Spectrum

This test is to evaluate

4.5.1 Test Over View

Results	Complies (as tested per this report)				Date	07/0/2007	
Standard	FCC Part 15.215 (b)						
Product Model	Radio Bridge			Serial#	Protoype		
Configuration	See test plan for details						
Test Set-up	Tested in 3m chamber EUT placed on table See test plan for details						
EUT Powered By	AC/DC Adapter & Batteries	Temp	22°C	Humidity	45%	Pressure	998mbar
Frequency Range	2.405GHz - 2.480GHz @ 3m						
Perf. Criteria	8dBm in a 3kHz BW		Perf. Verification		Readings under Limit		
Mod to EUT	None		Test Performed By		Dieter Baldamus		

4.5.2 Test Procedure

The Radiated Power Density was performed using a 1 second interval over a 3kHz bandwidth within each band.

The frequency range from 2.405-2.480 GHz was investigated for radiated emissions, testing the lowest middle and highest channels

Radiated emission testing was first performed at a distance of 3 meters in the semi-anechoic chamber in order to identify the specific frequencies for which these measurements will be made on the 3m OATS

4.5.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

4.5.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

4.5.5 Test Results

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.5.6 Summary of Final Data

NOTES:

Transmitter Power Density Measurement
☒ 14:23:49 NOV 07, 2007

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE

MARKER

2.405124 GHz

-9.86 dBm

ACTV DET: PEAK

MEAS DET: PEAK OP AVG

MKR 2.405124 GHz

-9.86 dBm

LOG REF 13.0 dBm

PREAMP ON

10

dB/

ATTN

50 dB

VA SB

SC FC

CORR

CENTER 2.405450 GHz

#1F BW 3.0 kHz

#AUG BW 3 kHz

SPAN 1.500 MHz

#SWP 500 msec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3146 Log Per☐ 3106 Horn☐ 3109 Bicon☒ 3115 Horn☐ CBL6112B Bilog☐ CBL6140 X-Wing☐ JB3 Bilog☐ NSLK 8126 LISN☐ NNB-4/63TL LISN☐ NNB-4/200X LISN☐ MDS-21 Clamp**MEAS TYPE:**☒ Radiated Prescan☐ Radiated Final☐ Conducted☐ Disturbance Power☐ Other _____**POLARIZATION:**☒ Vertical☒ Horizontal☐ Line☐ Neutral☐ NA**DISTANCE:**☒ 3 Meter☐ 10 Meter☐ _____ Meter☐ NA**LOCATION:**☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Transmitter Power Density Measurement
☒ 15:07:36 NOV 07, 2007

MARKER
 2.444501 GHz
 -10.12 dBm

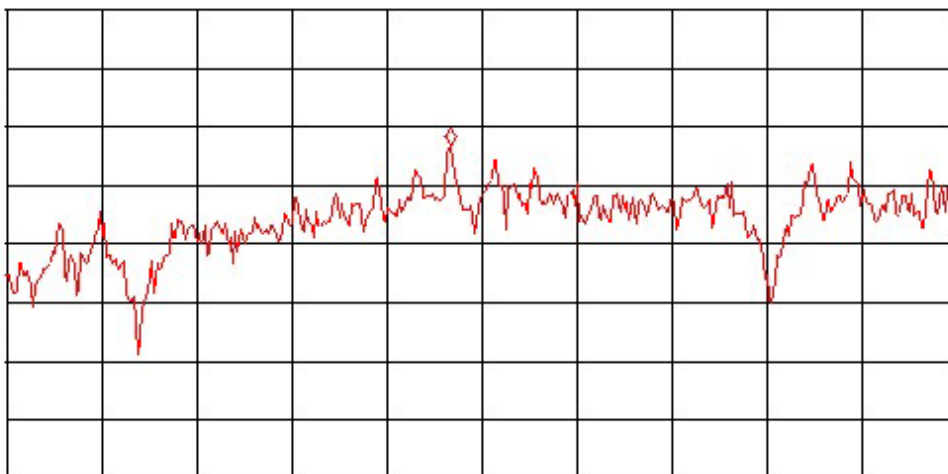
ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 2.444501 GHz
 -10.12 dBm

LOG REF 13.0 dBm

PREAMP ON

10
 dB/
 ATN
 50 dB

VA SB
 SC FC
 CORR



CENTER 2.444550 GHz

SPAN 1.500 MHz

#JF BW 3.0 kHz

#AVG BW 3 kHz

SWP 500 msec

ANTENNA/COUPLER:

- ☐ 9124 Bicon
☐ 3146 Log Per
☐ 3106 Horn

- ☐ 3109 Bicon
☒ 3115 Horn
☐ CBL6112B Bilog

- ☐ CBL6140 X-Wing
☐ JB3 Bilog
☐ NSLK 8126 LISN

- ☐ NNB-4/63TL LISN
☐ NNB-4/200X LISN
☐ MDS-21 Clamp

MEAS TYPE:

- ☒ Radiated Prescan
☐ Radiated Final
☐ Conducted
☐ Disturbance Power
☐ Other _____

POLARIZATION:

- ☒ Vertical
☒ Horizontal
☐ Line
☐ Neutral
☐ NA

DISTANCE:

- ☒ 3 Meter
☐ 10 Meter
☐ _____ Meter
☐ NA

LOCATION:

- ☐ OATS
☐ Semi-Anechoic
☒ Shielded Room
☐ Factory Floor
☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Transmitter Power Density Measurement

 14:46:34 NOV 07, 2007

 MARKER
 2.479494 GHz
 -9.25 dBm

 ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 2.479494 GHz
 -9.25 dBm

LDG REF 15.0 dBm

 10
 dB/
 ATN
 40 dB

 VA SB
 SC FC
 CORR

CENTER 2.460000 GHz

#JF BW 3.0 kHz

#AVG BW 3 kHz

SPAN 1.500 MHz

SWP 500 msec

ANTENNA/COUPLER:
☐ 9124 Bicon
☐ 3146 Log Per
☐ 3106 Horn

☐ 3109 Bicon
☒ 3115 Horn
☐ CBL6112B Bilog

☐ CBL6140 X-Wing
☐ JB3 Bilog
☐ NSLK 8126 LISN

☐ NNB-4/63TL LISN
☐ NNB-4/200X LISN
☐ MDS-21 Clamp
MEAS TYPE:
☒ Radiated Prescan
☐ Radiated Final
☐ Conducted
☐ Disturbance Power
☐ Other _____
POLARIZATION:
☒ Vertical
☒ Horizontal
☐ Line
☐ Neutral
☐ NA
DISTANCE:
☒ 3 Meter
☐ 10 Meter
☐ _____ Meter
☐ NA
LOCATION:
☐ OATS
☐ Semi-Anechoic
☒ Shielded Room
☐ Factory Floor
☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.5.7 Photos



Figure 8 – Transmitter Power Density Spectrum (Semi-Anechoic Chamber 2)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.6 Conducted Emissions

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other near by electronic equipment.

4.6.1 Test Over View

Results	Complies (as tested per this report)				Date	07/0/2007	
Standard	FCC Part 15.207						
Product Model	Radio Bridge			Serial#	Prototype		
Configuration	See test plan for details						
Test Set-up	Tested in shielded room EUT placed on table						
EUT Powered By	AC/DC Adapter & Batteries	Temp	22°C	Humidity	45%	Pressure	998mbar
Frequency Range	120V/60Hz, 0150-30MHz						
Perf. Criteria	FCC Part 15.207 (a)		Perf. Verification		Readings Under Limit for L1 and L2		
Mod. to EUT	None		Test Performed By		Dieter Baldamus		

4.6.2 Test Procedure

Conducted and FCC emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 0.15 to 30 MHz was investigated for conducted emissions.

Conducted Emissions measurements were performed in the shielded room using procedures specified in the test plan and standard.

4.6.3 Deviations

There were no deviations from the test methodology listed in the test plan for the conducted emission test.

4.6.4 Final Test

All final conducted emissions measurements were below (in compliance) the limits.

4.6.5 Final Graph

NOTES:

Conducted Emissions @ 120V/60Hz

☒ 16:09:46 NOV 07, 2007

MFR: SENSOR SWITCH MODEL: RADIO BRIDGE [X]L [X]N

MARKER

4.19 MHz

56.78 dB μ V

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 4.19 MHz

56.78 dB μ VLOG REF 60.0 dB μ V

10

dB/

ATTN

10 dB

VA VB

SC FC

ACDR

START 150 kHz

#1F BW 9.0 kHz

AVG BW 30 kHz

STOP 30.00 MHz

SWP 2.49 sec

ANTENNA/COUPLER:☐ 9124 Bicon☐ 3109 Bicon☐ CBL6140 X-Wing☐ NNB-4/63TL LISN☐ 3146 Log Per☐ 3115 Horn☐ JB3 Bilog☐ NNB-4/200X LISN☐ 3106 Horn☐ CBL6112B Bilog☐ NSLK 8126 LISN☐ MDS-21 ClampMEAS TYPE:☐ Radiated Prescan☐ Radiated Final☒ Conducted☐ Disturbance Power☐ Other _____POLARIZATION:☐ Vertical☐ Horizontal☒ Line☒ Neutral☐ NADISTANCE:☐ 3 Meter☐ 10 Meter☐ _____ Meter☒ NALOCATION:☐ OATS☐ Semi-Anechoic☒ Shielded Room☐ Factory Floor☐ Other _____

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.6.6 Final Tabulated Data at 120V/60Hz

Conducted Emissions Measurements												
Standard:	EN55022:1998, Class B/FCC Part 15.107 (a)									Date:	11/9/2007	
Device Tested:	Sensor Switch - Radio Bridge									File:	.xls 07110902 CE120V.xls	
Voltage:	120V/60Hz											
Signal Num	Freq	Peak Amp	QP Amp	Avg Amp	QP Limit	Avg Limit	Conductor	QP ∪	QP Result	Avg ∪	Average Result	Mode
	MHz	dBuV	dBuV	dBuV	dBuV	dBuV		dB		dB		
1	0.1633	43.45	36.71	23.77	65.29	55.29	Line	-28.58	Complied	-31.52	Complied	
2	0.2858	37.09	31.35	4.51	60.64	50.64	Line	-29.29	Complied	-46.13	Complied	
3	0.5039	17.19	9.77	2.53	56.00	46.00	Line	-46.23	Complied	-43.47	Complied	
4	25.0133	44.17	43.75	43.28	60.00	50.00	Line	-16.25	Complied	-6.72	Complied	
5	0.1615	40.73	33.93	23.61	65.39	55.39	Neutral	-31.46	Complied	-31.78	Complied	
6	0.2720	33.87	26.69	8.77	61.06	51.06	Neutral	-34.37	Complied	-42.29	Complied	
7	13.8424	13.28	8.74	2.33	60.00	50.00	Neutral	-51.26	Complied	-47.67	Complied	
8	17.8317	13.95	9.02	2.75	60.00	50.00	Neutral	-50.98	Complied	-47.25	Complied	
9	25.0134	43.54	43.16	42.71	60.00	50.00	Neutral	-16.84	Complied	-7.29	Complied	
Tested by: Dieter Baldamus												
TUV Rheinland of North America, Inc. 12 Commerce Road Newtown, CT 06470 Tel:(203) 426-0888 Fax: (203) 426-4009												
CE22_B.xls Revised 13APR05												

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.6.7 Photos



Figure 9 –Conducted Emissions Test Setup

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.7 Frequency Stability

This test is to evaluate the performance of the EUT when subjected to temperature and voltage changes

4.7.1 Test Over View

Results	Complies (as tested per this report)					Date	10/09/2007	
Standard	FCC Part 15.215							
Product Model	Radio Bridge				Serial#	Prototype		
Configuration	See test plan for details							
Test Set-up	Tested in shielded room. See test plans for details							
EUT Powered By	AC/DC Adapter & Batteries	Temp	22°C	Humidity	45%	Pressure	998mbar	
Frequency Range	2.405 GHZ – 2.480GHz			Temperature Range		0°C – 70°C		
Perf. Criteria	Containment of 20dB of frequency range			Perf. Verification		Readings under Limit		
Mod to EUT	See section 5.5			Test Performed By		Dieter Baldamus		

4.7.2 Test Procedure

EUT was placed in a temperature chamber. Frequency and output power level were measured at room temperature. Temperature in the chamber was increased to 70°C and maintained till the EUT reached that temperature. Frequency and level was measured again. EUT was placed into a humidity chamber and temperature was set to 0 °C. Temperature was maintained till the EUT reached that temperature. Frequency and level were measured again.

4.7.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Surge Immunity test.

4.7.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

4.7.5 Summary of Final Test Results

Frequency Stability Test - Temperature Variations						
Standard:	FCC Part 15.225 e)				Date:	11/9/2007
Device Tested:	Radio Bridge				File:	07100812 Freq. Stability.xls
Customer:	Sensor Switch					
Temperature	Start-up (GHz)	2min (GHz)	5min (GHz)	10min (GHz)	Permitted Band Edge in MHz (+/-0.01%)	Results
Low						
0°C	2.4045	2.4045	2.4048	2.4049	2.4000GHz-2.4835GHz	Complied
22°C	2.4048	2.4050	2.4049	2.4050	2.4000GHz-2.4835GHz	Complied
70°C	2.4049	2.4050	2.4049	2.4050	2.4000GHz-2.4835GHz	Complied
Middle						
0°C	2.4445	2.4445	2.4445	2.4446	2.4000GHz-2.4835GHz	Complied
22°C	2.4445	2.4445	2.4446	2.4446	2.4000GHz-2.4835GHz	Complied
70°C	2.4446	2.4446	2.4446	2.4446	2.4000GHz-2.4835GHz	Complied
High						
0°C	2.4805	2.4805	2.4805	2.4805	2.4000GHz-2.4835GHz	Complied
22°C	2.4805	2.4805	2.4805	2.4805	2.4000GHz-2.4835GHz	Complied
70°C	2.4805	2.4805	2.4805	2.4805	2.4000GHz-2.4835GHz	Complied
Tested by:	Dieter Baldamus					
TUV Rheinland of North America, Inc. 12 Commerce Road Newtown, CT 06470 Tel:(203) 426-0888 Fax: (203) 426-4009						

FCC TempStab.xls Revised 24APR08

Frequency Stability Test - Voltage Variations						
Standard:	FCC Part 15.225 e)				Date:	6/11/2008
Device Tested:	DSVII+Turbo				File:	08061101 FreqVar.xls
Customer:	Datastrip					
Temperature	Start-up (GHz)	2min (GHz)	5min (GHz)	10min (GHz)	Permitted Band Edge in MHz (+/-0.01%)	Results
Low						
102 V(85%)	2.4047	2.4047	2.4048	2.4048	2.4000GHz-2.4835GHz	Complied
120V (100%)	2.4048	2.4047	2.4048	2.4048	2.4000GHz-2.4835GHz	Complied
138V (115%)	2.4047	2.4047	2.4047	2.4047	2.4000GHz-2.4835GHz	Complied
Middle						
102 V(85%)	2.4445	2.4445	2.4445	2.4445	2.4000GHz-2.4835GHz	Complied
120V (100%)	2.4444	2.4444	2.4444	2.4444	2.4000GHz-2.4835GHz	Complied
138V (115%)	2.4445	2.4445	2.4445	2.4445	2.4000GHz-2.4835GHz	Complied
High						
102 V(85%)	2.4806	2.4805	2.4804	2.4805	2.4000GHz-2.4835GHz	Complied
120V (100%)	2.4805	2.4805	2.4805	2.4805	2.4000GHz-2.4835GHz	Complied
138V (115%)	2.4806	2.4805	2.4806	2.4805	2.4000GHz-2.4835GHz	Complied
Tested by:	Dieter Baldamus					
TUV Rheinland of North America, Inc. 12 Commerce Road Newtown, CT 06470 Tel:(203) 426-0888 Fax: (203) 426-4009						

FCC TempStab.xls Revised 24APR08

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.7.6 Photos



Figure 10 –Frequency Stability Test Setup – Temperature Chamber at +50°C

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.



Figure 11 –Frequency Stability Test Setup – Humidity Chamber at 0°C

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.8 Band Edge Measurement

This test evaluates the potential for the EUT to cause voltage fluctuation and flicker impressed on the public AC low-voltage system.

4.8.1 Test Over View

Results	Complies (as tested per this report)				Date	05/13/2008	
Standard	FCC Part 215 c)/RSS-210						
Product Model	Radio Bridge			Serial#	Protoype		
Configuration	See test plan for details						
Test Set-up	Tested in OATS EUT placed on table See test plan for details						
EUT Powered By	AC/DC Adapter & Batteries	Temp	22° C	Humidity	45%	Pressure	1001mbar
Perf. Criteria	6dB and 99% Band Edge		Perf. Verification		Readings within Limit		
Mod to EUT	None		Test Performed By		Error! Reference source not found.		

4.8.2 Test Procedure

Radiated field strength emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration. Testing was performed at a distance of 10 meters on the OATS Deviations. Reading were made at 6dB and 99% of the fundamental signal.

4.8.3 Deviations

There were no deviations from the test methodology listed in the test plan for the band edge measurement test.

4.8.4 Final Test

The Band Edge Measurements were within the limits specified in the standard.

4.8.5 Tabulated Test Data

Radiated Emissions Measurements								
Standard:	47 CFR FCC Part 15.215 c)/RSS-210			PRESCAN or FINAL:		Final	Date:	5/13/2008
Device Tested:	Sensor Switch - Radio Bridge				Distance:	10m	File Name:	0805301Bandedge.xls
Mode:	Normal Operation							
Mount:	Table Top							
Modifications:	NA							
		Measured Level						
					99% Measured Bandwidth (MHz)			
Meas #	TX Band	Peak	-20dB High End (MHz)	+20dB High End (MHz)		Band (MHz)	Result	Comment
RBW = 9kHz VBW=30kHz								
1	2404.48	3.60	2403.53	2405.31	1.7800	2400-2483.5	Complied	
2	2445.48	2.73	2444.52	2446.33	1.8100	2400-2483.6	Complied	
3	2480.24	2.86	2479.49	2481.36	1.8700	2400-2483.7	Complied	
Tested by:	Dieter Baldamus							
TUV Rheinland of North America, Inc. 12 Commerce Road Newtown, CT 06470 Tel:(203) 426-0888 Fax: (203) 426-4009								

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.8.6 Photos

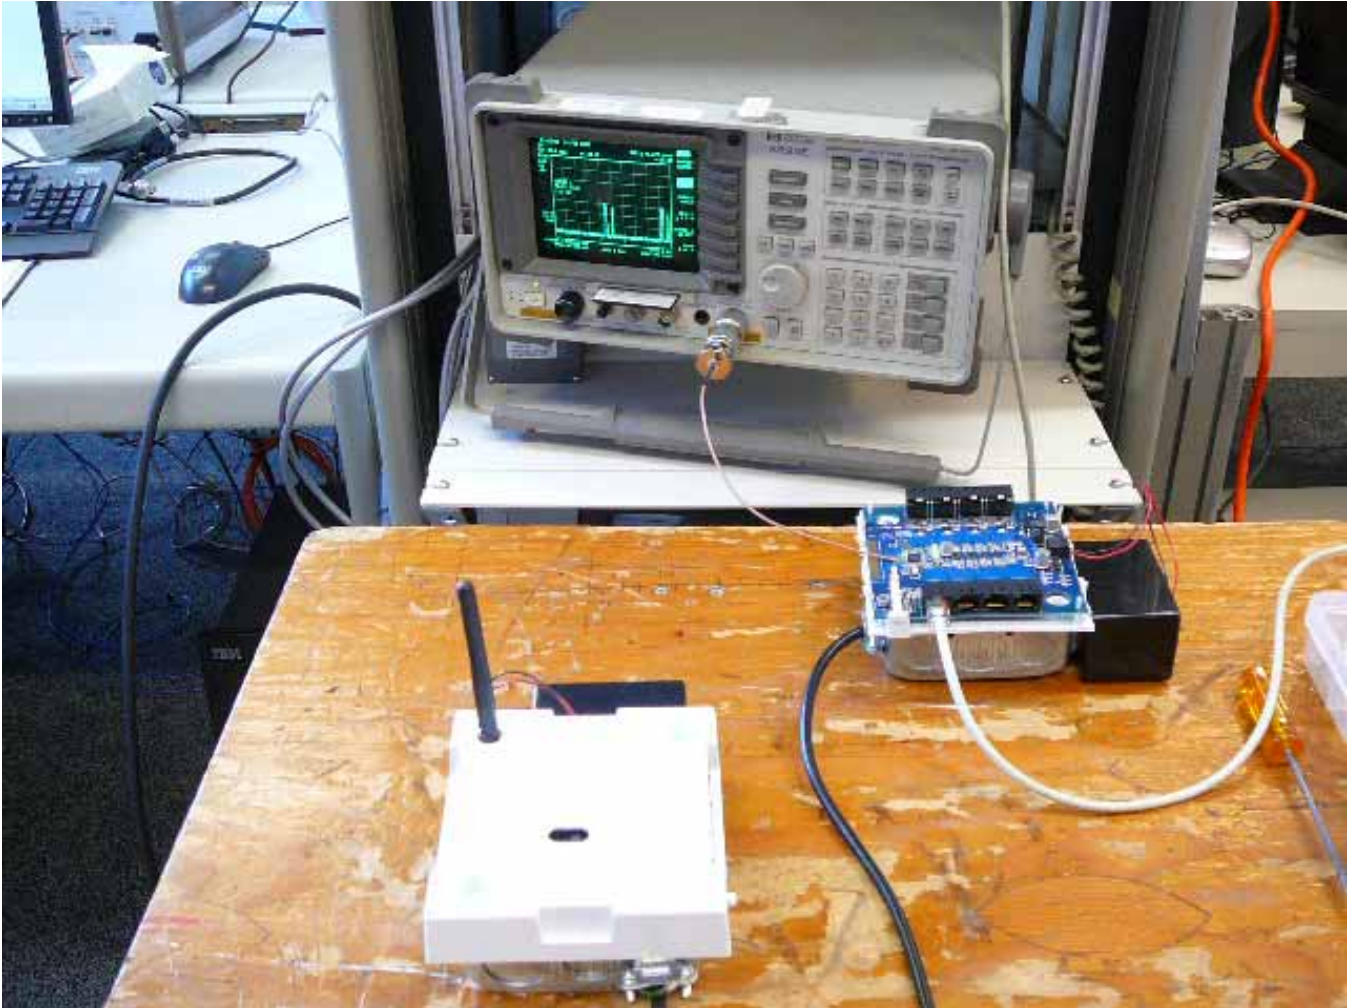


Figure 12 –Frequency Stability Test Setup – Humidity Chamber at 0°C

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Appendix A

5 Test Plan

This test report is intended to follow this test plan outlined here in unless other wise stated in this here report. The following test plan will give details on product information, standards to be used, test set ups and refer to TUV test procedures. The test procedures will give the steps to be taken when performing the stated test. The product information below came via client, product manual, product itself and or the internet.

5.1 General Information

Client	Sensor Switch, Inc.
Address	900 Northrop Road
Address	Wallingford, CT 06492
Contact Person	William J Fassbender
Telephone	(203) 265-2842
Fax	(203) 265-1565
email	fozzy@sensorswitch.com

5.2 Model(s) Name

Radio Bridge

5.3 Type of Product

Lighting Control System

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

5.4 Equipment Under Test (EUT) Description

The EUT is a wireless foot pedal used for various applications in the industrial environment. The wireless system eliminates the nuisance of wires under foot while invisible waves fill a room with 360° of signal. The EUT consist of a wireless foot pedal transmitter and a receiver; one (the transmitter) used with batteries and one (the receiver) used with an AC/DC adapter. The receiver also sends a signal every second to control de antenna output power of the transmitter.

5.5 Modifications

Software Change to comply with the frequency stability test.

5.6 Product Environment

☐	Residential	☐	Hospital
☒	Light Industrial	☐	Small Clinic
☐	Industrial	☐	Doctor's office
☐	Other		

*Check all that apply

5.7 Countries

☒	USA
☐	Taiwan
☐	Japan
☐	Europe

*Check all that apply

5.8 Applicable Documents

Standard	Description
FCC Part 15	Rado Frquency Devices -Part C
FCC Part 15.247 (a) (2) RSS-210	Spectrum Bandwith of a Direct Sequence Spread Spectrum System
FCC Part 15.247 (b)	Maximum Output Power
FCC Part 1.1310	RF Human Exposure Limit
FCC Part 15.247 (c), 15.205, 15.209	Radiated Spurious Emissions
FCC Part 15.247 (d)	Transmitter Power Density of a Direct Sequence Spread Spectrum System
FCC Part 15.207	Conducted Emissions
FCC Part 15.215 (b)	Frequency Stability
FCC part 15.215 c), RSS-210	Band Edge Measurement

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

5.9 General Product Information

Size (Transmitter)	H	5cm	W	15cm	L	15cm
Weight (Transmitter)	0.5		Fork-Lift Needed		No	
Notes	None					

5.10 EUT Powered Information

5.10.1 Power Type

☒	AC	☒	DC (From AC/DC Block)	☐	Batteries	☐	Host -
-------------------------------------	----	-------------------------------------	-----------------------	--------------------------	-----------	--------------------------	--------

5.10.2 Power Information

Name	Type	Voltage		Frequency	Current	Notes
		min	max			
24VDC AC/DC Adapter	Class 1	120VAC	120VAC	60Hz	500mA	
Notes						

5.11 EUT Modes Of operation

The EUT footswitch transmitter has 2 modes of operation. Switch ON or Switch OFF. Both modes were in operation during the test. The receiver was constantly on receiving signals from the footswitch transmitter.

5.12 EUT Configurations

Configuration	Description
Configuration 1	Transmitter was on all the time
Note: all configurations are the same except as noted above	

5.13 EUT Clock/Oscillator Frequencies

☐	Less than 108MHz	FCC – scan up to 1GHz
☐	Less than 500MHz	FCC – scan up to 2GHz
☐	Less than 1000MHz	FCC – scan up to 5GHz
☒	Greater than 1000MHz	FCC – scan up to 5 th Harmonic or 40GHz (2.4GHz)

5.14 Electrical Support Equipment

Type	Manufacture	Model	Connected To
NA	NA	NA	NA

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

5.15 Non - Electrical Support Equipment

Item	Notes
NA	NA

5.16 EUT Equipment/Cabling Information

EUT Port	Connected To	Location	Cable Type		
			Length	Shielded	Bead
15-24VDC Input	AC/ DC Terminal Block	Tx/ Rx	1.5m	No	No

5.17 EUT Doors

☒	None
☐	For service personnel only
☐	Operator will wear ESD strap
☐	Other

5.18 EUT Grounding

☒	None
☐	AC line cord – third wire
☐	Via host I/O cable
☐	Other

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

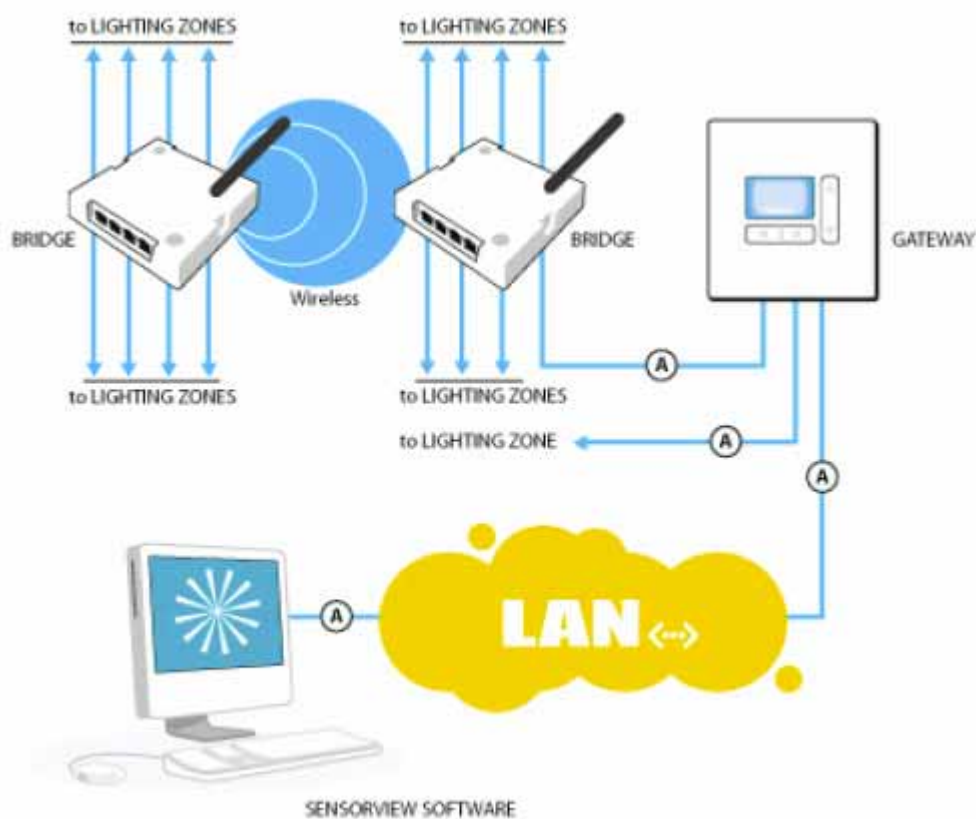
5.19 EUT Test Program

None

5.20 Monitoring of EUT during Testing

During the test a LED in the receiver indicates that the switch of the transmitter is ON. If the LED is off the foot switch is OFF as well.

5.21 EUT Configuration Block Diagram



The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

TUV Rheinland D-51101 Köln 91 Am Grauen Stein/ Konstantin-Wille-Str. 1	Please submit in duplicate		
	Gen-Ausw.-Nr.	Aktenzeichen:	Anlage-Nr.
		30762324.001 Sensor Switch - Radio Bridge	1 of 1
EMC/EMV Constructional Data Form			
Item Listing No. & Location in EUT	Component / Sub-Assembly	Part No. & Description	Freq.; Rated ERP/Atten.
1.0	Enclosure	Plastic	NA
2.0	Antenna	AN -A2	2.14dBi
TUV Rheinland Prüfstelle für Gerätesicherheit Köln, den:		Applicant Ort/place: Datum/date:	
(report copy not signed)		(report copy not signed)	
TUV Rheinland Prüfstelle für Gerätesicherheit		(Stempel und Unterschrift des Antragstellers/ stamp and signature of applicant)	

Rev.1.0