


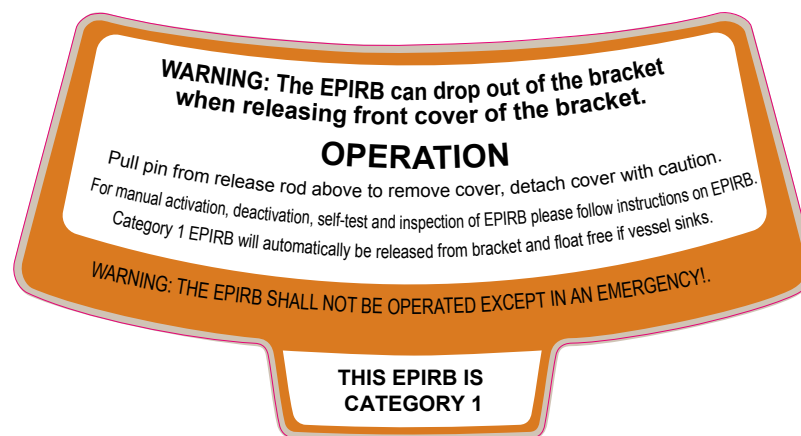

Folie: ORACAL 751 TRANSPARENT
 Colour: Orange
 Colour: Ligth grey (edge)
 Colour: Black (text)


E	31.03.14	BJ	Changed character
D	14.03.12	BJ	Changed from wessel to vessel.
A	08.12.10	AD	First version.
Rev.	Date	Sign.	Description/Change
Material:			This drawing is a property of Jotron AS and must not be duplicated or used for manufacture of the parts disclosed herein without permission from Jotron AS.
Surface Treatment:			Scale: 1 : 1
Approved:	Draft: AD	Date: 08.12.10	
LABEL OPERATION FB-60/Simrad FB-70			Replaces draft: Repl. by draft
			X-86212
			Sheet 1 / 1 Rev. E

406/121.5 MHz

S A T E L L I T E

EPIRB

Foliotype: FASCAL TRANSP FOLIE
Color: GREY

A	10.12.10	AD	First version
Rev.	Date	Sign	Description/Change
Material:			This drawing is a property of Jotron AS and must not be duplicated or used for manufacture of the parts disclosed herein without permission from Jotron AS
Surface Treatment:			Scale: 1 : 1
Approved:	Draft:	Date:	
	AD	10.12.10 	
LABEL 406/121,5 MHz FB-60/Simrad FB-70			Replaces draft:
			Repl. by draft: X-86216
			Sheet: 1 / 1 Rev: A

WARRANTY VOID
IF SEAL IS BROKEN

Folie type: SCS500-500 (sølvgrå)
Colour text: BLACK

A	17.09.12	AD	First version.
Rev.	Date	Sign.	Description/Change
Material:		This drawing is a property of Jotron AS and must not be duplicated or used for manufacture of the parts disclosed herein without permission from Jotron AS	
Surface Treatment:		Scale: 1 : 1	
Approved:	Draft: AD	Date: 17.09.12	
SEAL LABEL		Replaces draft:	Repl. by draft:
WARRANTY VOID IF SEAL IS BROKEN		X-87256	Sheet: 1 / 1 Rev: A

Note: The EPIRB will automatically activated when it's in water.

Manual Operating

Remove the EPIRB from the Bracket

Compass safety distance: 0,8m
безопасное расстояние до компаса : 0,8m

Weight: 1900g

In the event of false activation in the USA,
call toll free 1-855-406-USCG (8724)

Jotron AS cannot be held responsible for any
damage caused due to incorrect use of
equipment or breach of laid down
procedures.



www.jotron.com




0470/15

Activation:

- 1) Remove seal
- 2) Push
- 3) The switch goes to ON position.

Deactivate:
Reverse operation

Test:
(Only within first 5 min. of each hour)

- 1) Push and hold >15 sec.

Test passed after one single flash only.

WARNING!
FOR EMERGENCY USE ONLY!
Keep EPIRB with a clear view to the sky without obstructions of GPS antenna.

Colour: BLACK

Material: ORACAL 751 00 transparent

This drawing is property of Jotron AS and must not be duplicated or used for manucaturing of any parts disclosed

Surface Treatment:

Approved: Draft: TN Date: 20.09.13



LABEL
OPERATION
TRON 40VDR

Size: A4 Scale: 1 : 1 Sheet: 1 / 1

X-87555 Rev: D

D	20.11.14	BJ	wheelmark change from 2014 to 2015	nnnn
C	09.04.14	BJ	Change from signal to single	nnnn
B	16.01.14	BJ	Updated	nnnn
A	20.10.13	TN	First version	nnnn
Rev.	Date	Sign.	Description	EM No.

2017	2018	2019	2020	2021	2022						
Battery type: 87459 (Class 2) Lithium metal 7.2V / 18Ah Operation: > 168 hrs... -20°C to +55°C (-4°F to +130°F) Storage: -30°C to +70°C (-22°F to +158°F)						Service or SBM shall be performed within battery expire date: Serviced by:					
Expire date year/month											
1	2	3	4	5	6	7	8	9	10	11	12

Colour: BLACK

B	29.01.14	BJ	New design	nnnn
A	20.09.13	TN	First version	nnnn
Rev.	Date	Sign.	Description	EM No.
Material:			This drawing is property of Jotron AS and must not be duplicated or used for manucaturing of any parts disclosed	
ORACAL 751 00 transparent				
Surface Treatment:				
Approved:	Draft:	Date:		
	TN	20.09.13		
LABEL			Size:	Scale:
BATTERY EXPIRE DATE			A4	1 : 1
TRON 40VDR			X-87556	
			Rev: B	

Bracket type: 87920, FB-40VDR
Category 1, Automatic release
Replace hydrostatic release:

Folie: ORACAL 751 TRANSPARENT
Colour: Light grey (edge)
Colour: Black (text)

A	20.06.13	BJ		
Rev.	Date	Sign	Description/Change	
Material:			This drawing is a property of Jotron AS and must not be duplicated or used for manufacture of the parts disclosed herein without permission from Jotron AS	
Surface Treatment:			Scale: 1 : 1	
Approved:	Draft: AD	Date: 08.12.10		
LABEL BRACKET TYPE FB-40VDR			Replaces draft:	Repl. by draft:
			X-87759	Sheet: 1 / 1 Rev: A


EPIRB type: Tron 40VDR 406/121.5 MHz
Class 2 (-20°C to +55°C/-4°F to +131°F)
Jotron AS, Norway, www.jotron.com

Folie: ORACAL 751 TRANSPARENT
Colour: Light grey (edge)
Colour: Black (text)


C	17.06.14	BJ	Update temp. operating	
B	20.01.14	BJ		
A	01.10.13	BJ		
Rev.	Date	Sign	Description/Change	
Material:			This drawing is a property of Jotron AS and must not be duplicated or used for manufacture of the parts disclosed herein without permission from Jotron Electronics	
Surface Treatment:			Scale: 1 : 1	
Approved:	Draft: AD	Date: -----		
LABEL			Replaces draft:	Repl. by draft:
EPIRB TYPE			X-87760	
FB-40VDR				
			Sheet: 1 / 1	Rev. C



Colour: BLACK

Material: Murfolie, hvit			This drawing is property of Jotron AS and must not be duplicated or used for manucaturing of any parts disclosed			
Surface Treatment:						
Approved:	Draft: TN	Date: 21.09.13				
LABEL VOYAGE DATA RECORDER TRON 40VDR				Size: A4	Scale: 1 : 1	Sheet: 1 / 1
				X-87944		Rev: B

				nnnn
B	18.03.14	BJ	New text	nnnn
A	21009.13	TN	First version	nnnn
Rev.	Date	Sign.	Description	EM No.




Colour: BLACK


				nnnn
				nnnn
A	20.09.13	TN	First version	nnnn
Rev.	Date	Sign.	Description	EM No.

Material: ORACAL 751 00 transparent			This drawing is property of Jotron AS and must not be duplicated or used for manucaturing of any parts disclosed herin without permission from Jotron AS.		
Surface Treatment:					
Approved:	Draft: TN	Date: 20.09.13			
LABEL VDR DOCKING MODULE TRON 40S VDR			Size: A4	Scale: 1 : 1	Sheet: 1 / 1
			X-87945		Rev: A

Lithium battery type: 87459
Compass safe distance 0,8m
FCC ID:

Folie: ORACAL 751 TRANSPARENT
Colour: Light grey (edge)
Colour: Black (text)

C	17.06.14	BJ	Change safety distance	
B	01.01.14	BJ	Change safety distance	
A	01.10.13	BJ	First version.	
Rev.	Date	Sign	Description/Change	
Material:			This drawing is a property of Jotron El. and must not be duplicated or used for manufacture of the parts disclosed herein without permission from Jotron Electronics	
Surface Treatment:			Scale: 1 : 1	
Approved:	Draft: TN	Date: ?		
LABEL BATTERY TYPE FB-40VDR			Replaces draft:	Repl. by draft:
			X-87968	Sheet: 1 / 1 Rev: C

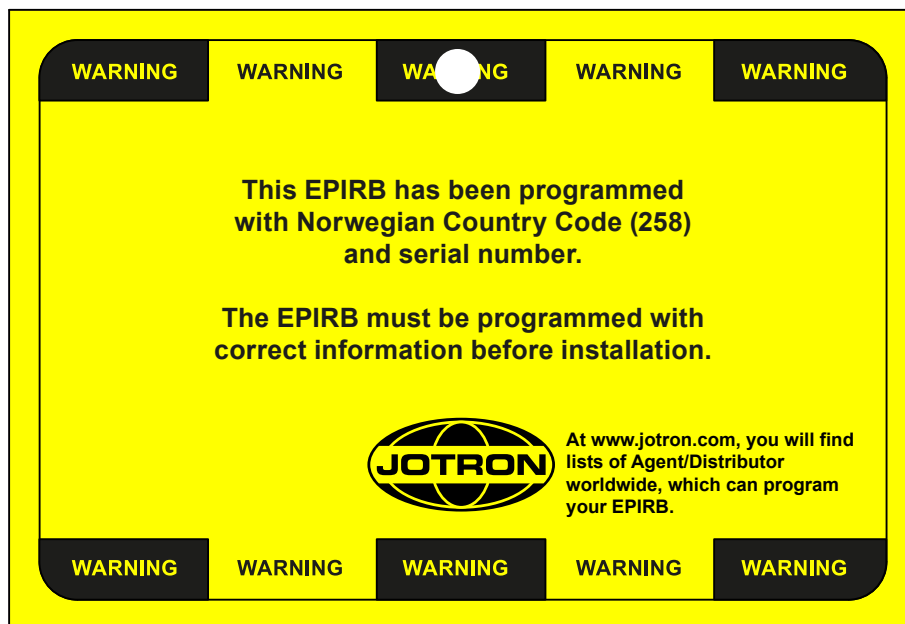

Print: Black

D	16.06.14	BJ	Updated "installation"	
C	30.01.14	BJ	Updated the address	
B	10.09.12	TN	Size reduced to half.	
A	10.03.11	BJ	First version	
Rev.	Date	Sign.	Description	EM No.
Material: Multicolour (yellow)			This drawing is property of Jotron AS and must not be duplicated or used for manufacturing of any parts disclosed	
Surface Treatment:				
Approved:	Draft:	Date:		
	TN	10.03.11		
LABEL WARNING WEPIRB w/hole			Size: A4	Sheet: 1 / 1
			X-91933	Rev: D



Arkivsystem for etiketter i pdf-format.

Dato: 17.12.2001

Etikettens x-nummer: X - 97997

Etikettens navn: LABEL ON-OFF-SWITCH, T-40S/GPS USA

Etikettens format bredde 70 mm høyde 16 mm

Folietype: TRANSPARENT

Trykkfarge: SORT





Arkivsystem for etiketter i pdf-format.

Dato: 17.02.2004

Etikettens x-nummer: X - X-97998

Etikettens navn: PUSH LABEL T-40S/GPS USA/STD

Etikettens format bredde 30 mm høyde 9 mm

Folietype: FASCAL TRANSP FOLIE

Trykkfarge: SORT

Ferdiggjøring: SLISSES

PUSH