


Test Report No.: RF260714B017

MODE	TX channel 55990/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	3,503.000	-48.10	-40.00	8.10	22.97	V	0.9	2.00
5	5,254.500	-53.16	-40.00	13.16	20.70	V	359	2.00
5	7,362.000	-58.58	-40.00	18.58	17.07	V	6.2	2.00
6	11,043.000	-60.85	-40.00	20.85	11.97	V	65.4	2.00

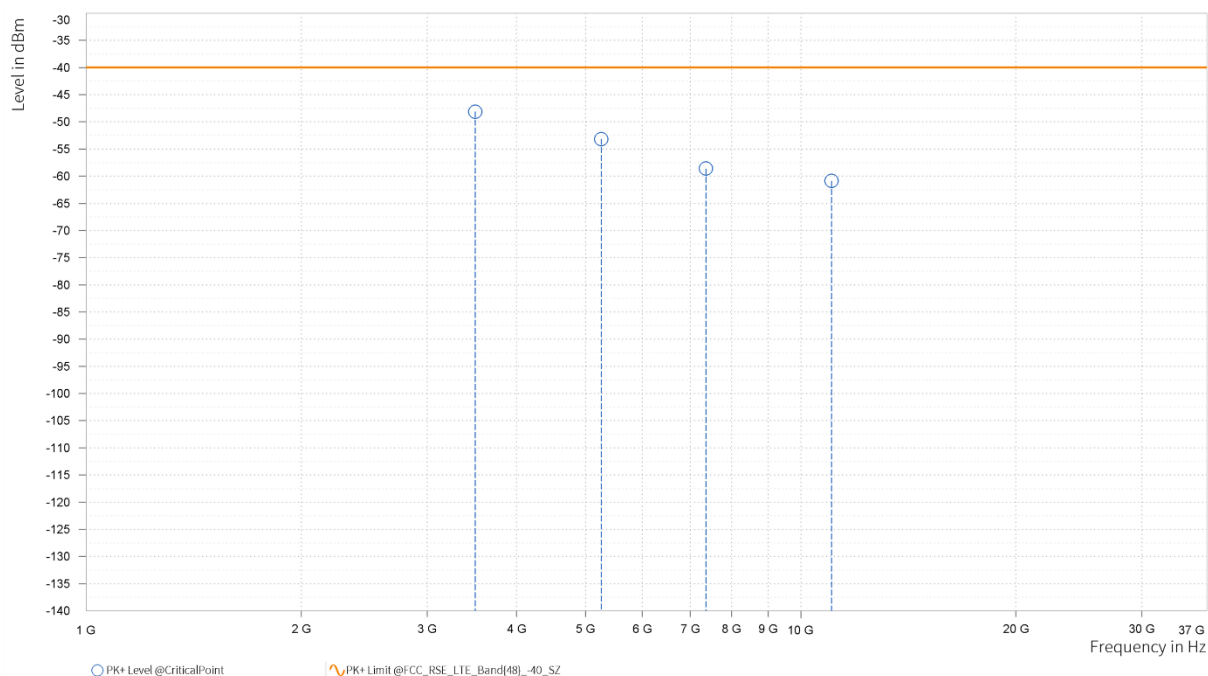


Test Report No.: RF260714B017

DC_66A_N41A

CHANNEL BANDWIDTH: (20+100) MHz

CHANNEL BANDWIDTH (20-100) MHz			
MODE	TX channel 132322/518598	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,422.000	-53.79	-25.00	28.79	20.52	H	1	2.00
4	5,002.000	-51.23	-25.00	26.23	23.66	H	359	2.00
4	5,133.000	-50.62	-25.00	25.62	23.57	H	359	1.00
5	7,503.000	-44.36	-25.00	19.36	27.41	H	342.2	1.00

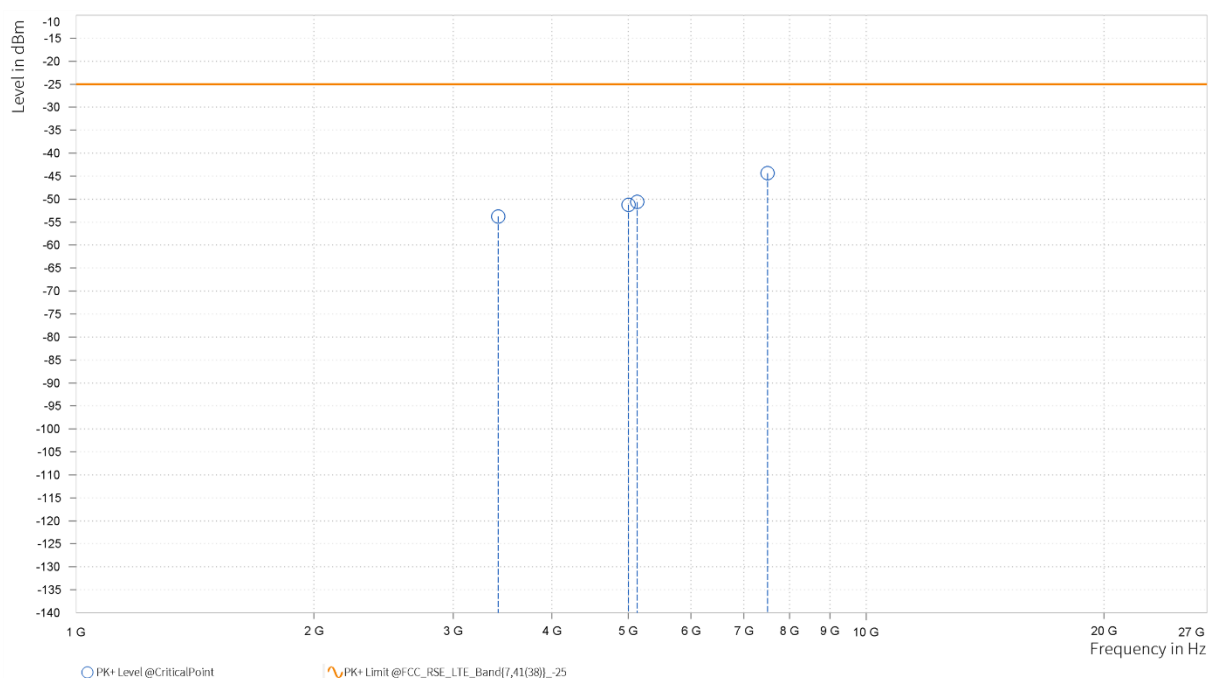

BOOMWAVE TEST (SHENZHEN)
CO., LTD.


Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan
4th Road, Chiwan Community, Zhaoshang Street,
Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: RF260714B017

MODE	TX channel 132322/518598	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,422.000	-53.58	-25.00	28.58	20.87	V	36.8	2.00
4	5,002.000	-51.11	-25.00	26.11	23.88	V	356.5	1.00
4	5,133.000	-49.89	-25.00	24.89	23.88	V	356.5	1.00
5	7,503.000	-46.47	-25.00	21.47	27.39	V	23.8	2.00

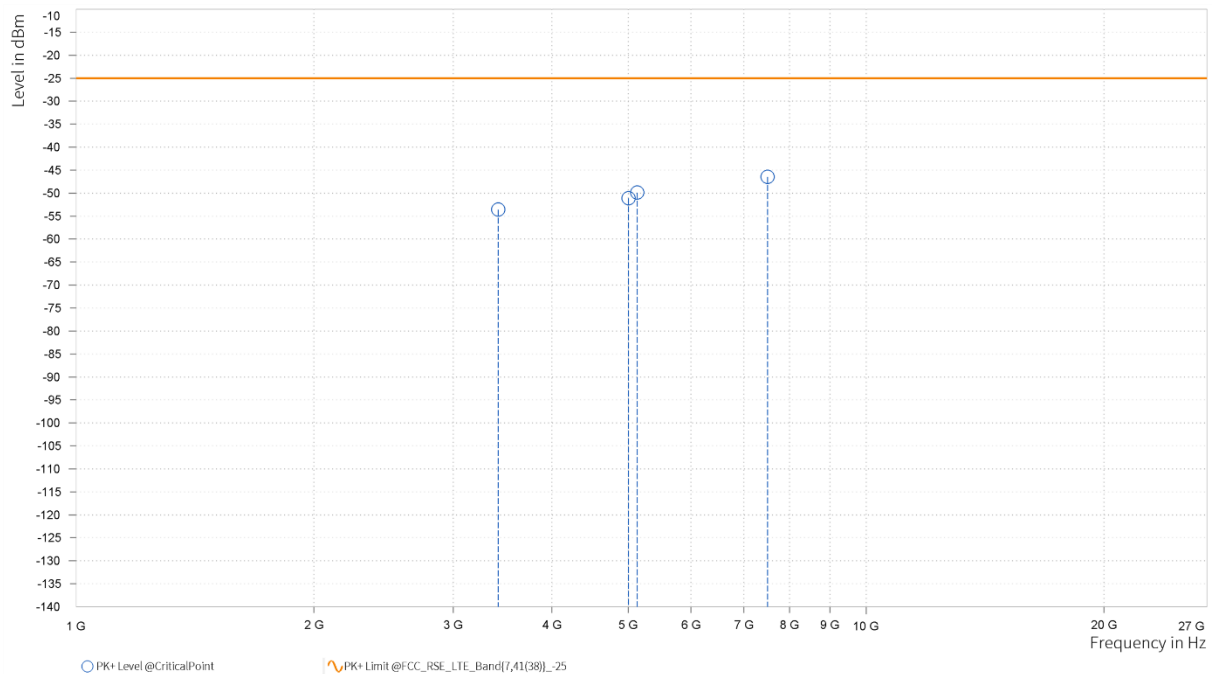


Test Report No.: RF260714B017

CHANNEL BANDWIDTH: (20+100) MHz

MODE	TX channel 132322/518598	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,472.000	-51.69	-25.00	26.69	20.35	H	1	2.00
4	5,096.000	-51.15	-25.00	26.15	23.44	H	359	1.00
4	5,208.000	-49.34	-25.00	24.34	23.90	H	152.2	1.00
5	7,644.000	-47.14	-25.00	22.14	27.83	H	335.2	1.00

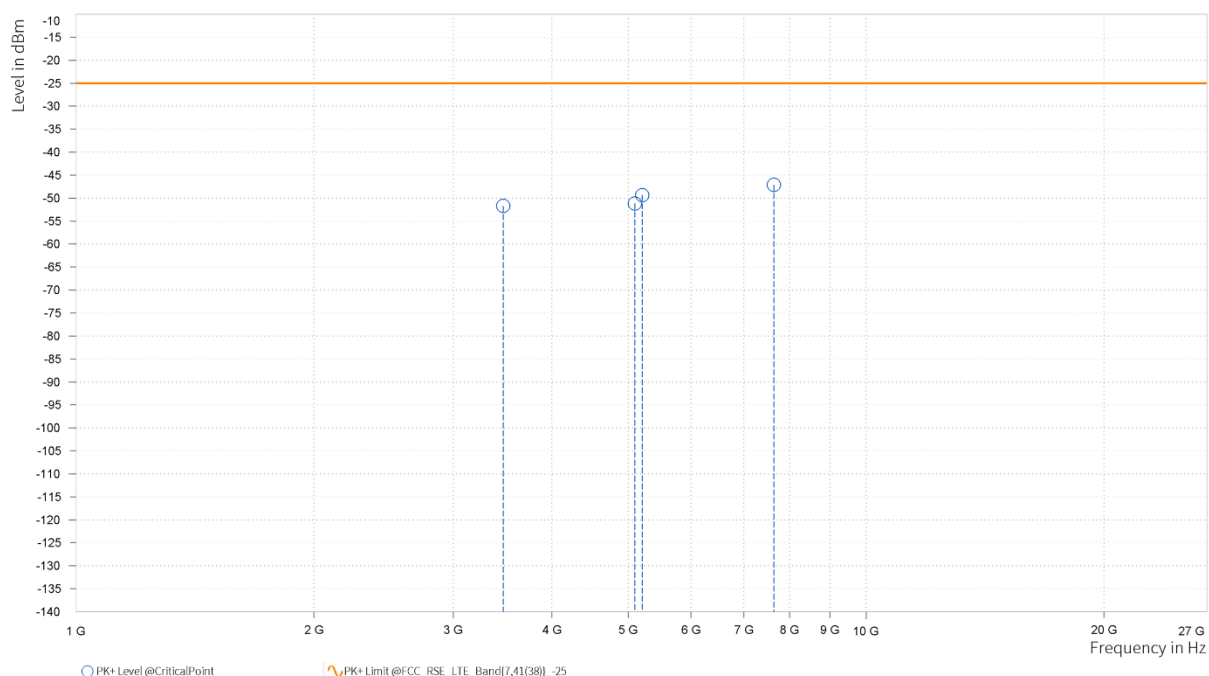

Test Report No.: RF260714B017

MODE	TX channel 132322/518598	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,472.000	-50.06	-25.00	25.06	21.07	V	206.6	2.00
4	5,096.000	-50.06	-25.00	25.06	23.99	V	1	2.00
4	5,208.000	-49.26	-25.00	24.26	24.49	V	359	2.00
5	7,644.000	-47.37	-25.00	22.37	27.67	V	357.8	1.00

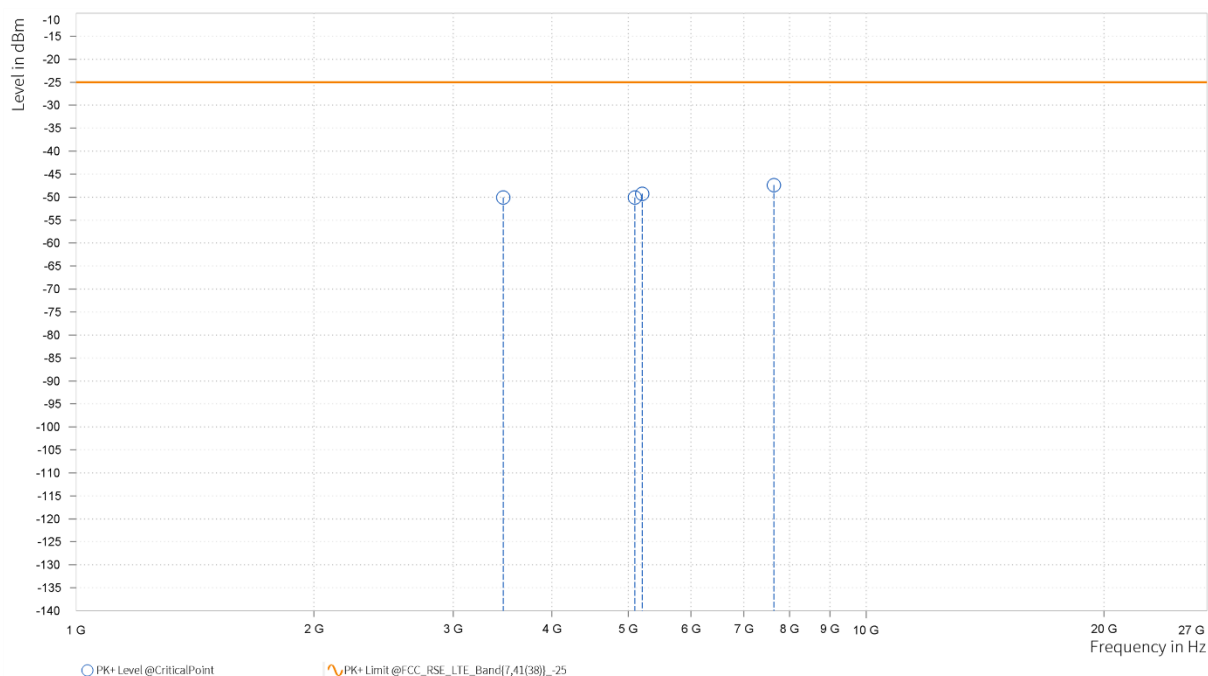

BOOMWAVE TEST (SHENZHEN)
CO., LTD.

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan
4th Road, Chiwan Community, Zhaoshang Street,
Nanshan District, Shenzhen, Guangdong, P.R. CHINA


Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: RF260714B017

CHANNEL BANDWIDTH: (20+100) MHz

MODE	TX channel 132322/518598	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,522.000	-51.99	-25.00	26.99	20.66	H	1	1.00
4	5,190.000	-50.60	-25.00	25.60	23.81	H	359	1.00
4	5,283.000	-50.73	-25.00	25.73	24.14	H	329.1	1.00
5	7,785.000	-45.98	-25.00	20.98	28.04	H	0.9	2.00

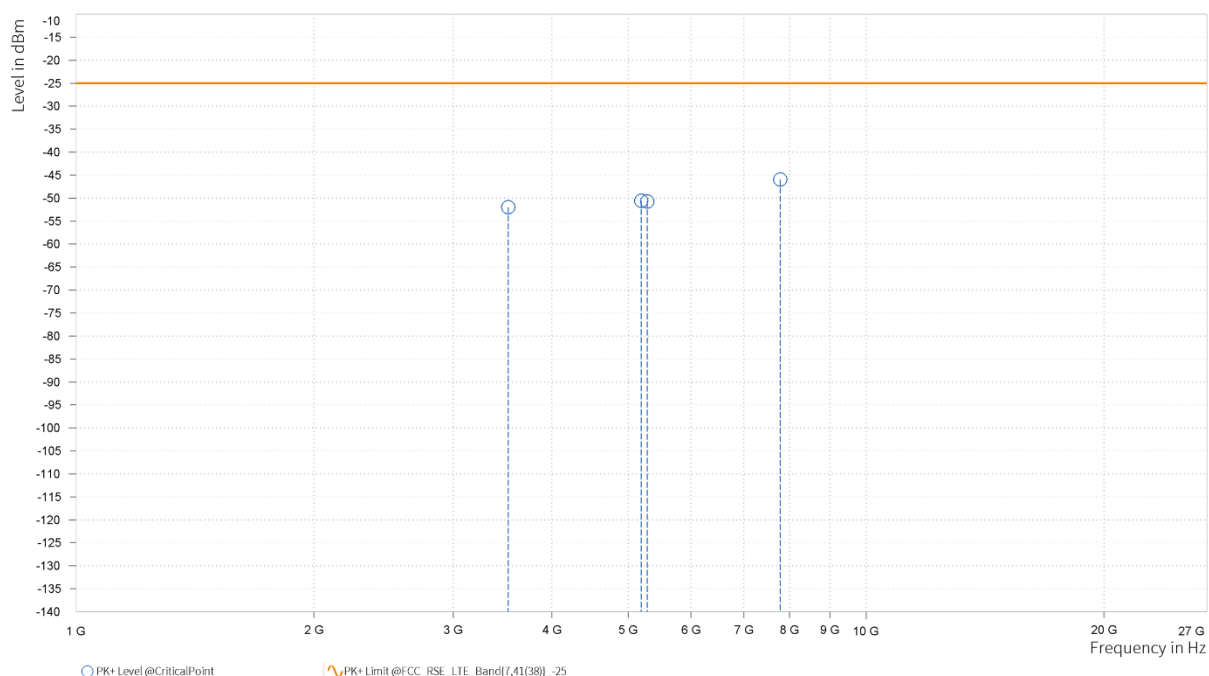

Test Report No.: RF260714B017

MODE	TX channel 132322/518598	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,522.000	-52.17	-25.00	27.17	21.24	V	340.3	1.00
4	5,190.000	-50.01	-25.00	25.01	24.34	V	22.6	2.00
4	5,283.000	-50.74	-25.00	25.74	24.65	V	359.1	1.00
5	7,785.000	-46.36	-25.00	21.36	27.83	V	14.2	2.00

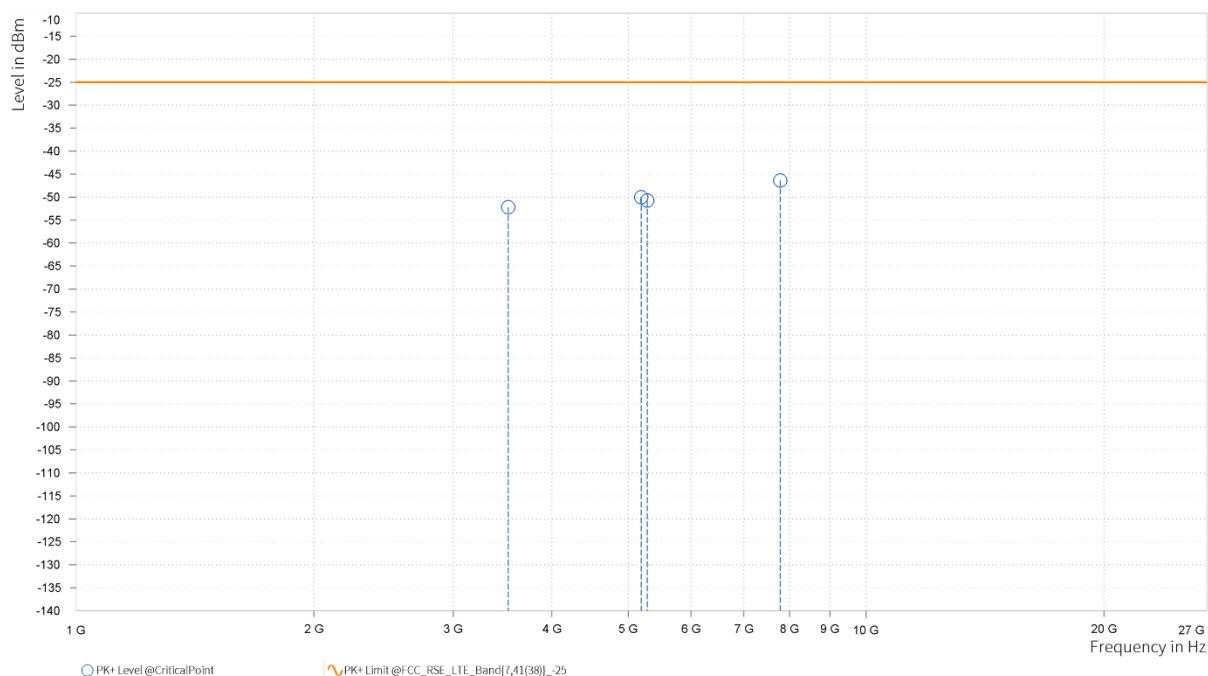


Test Report No.: RF260714B017

DC_71A_N66A

CHANNEL BANDWIDTH: (20+30) MHz

CHANNEL BANDWIDTH (20-65) MHz			
MODE	TX channel 133322/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,328.000	-47.77	-13.00	34.77	23.03	H	309.4	2.00
2	1,992.000	-42.22	-13.00	29.22	28.31	H	302.9	1.00
4	3,423.000	-53.34	-13.00	40.34	20.51	H	32	2.00
4	5,134.500	-51.44	-13.00	38.44	23.57	H	207.7	2.00

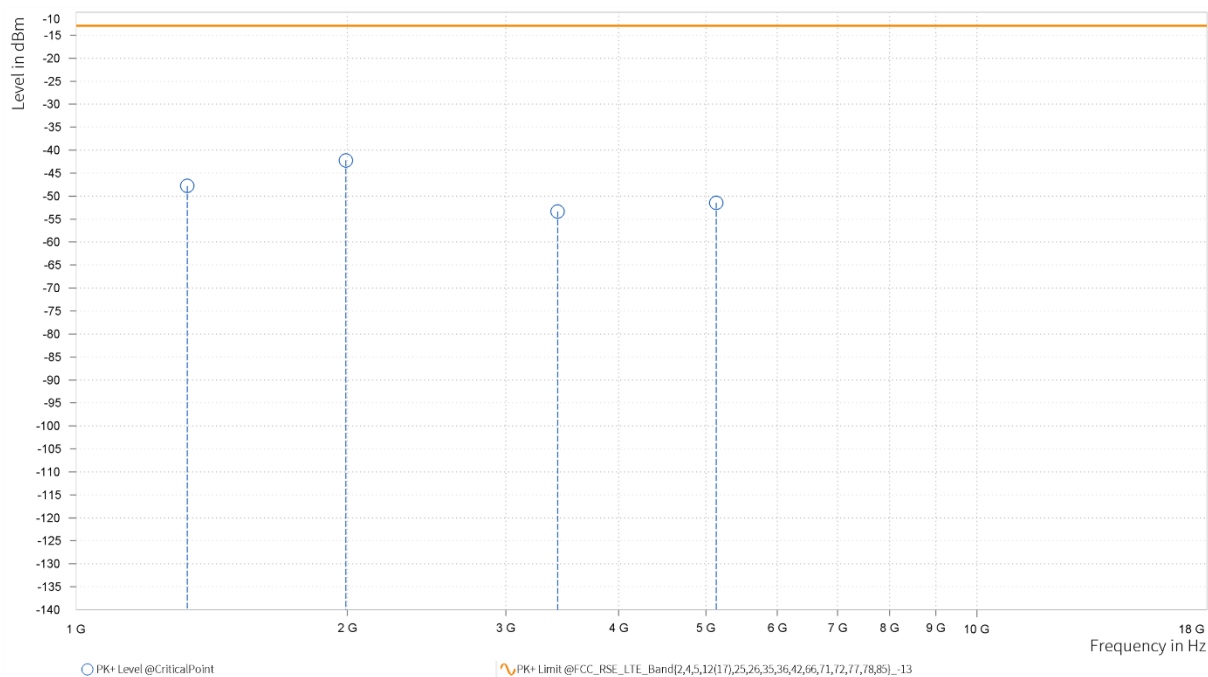

Test Report No.: RF260714B017

MODE	TX channel 133322/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,328.000	-46.65	-13.00	33.65	24.09	V	359	2.00
2	1,992.000	-41.66	-13.00	28.66	28.30	V	359	2.00
4	3,423.000	-51.55	-13.00	38.55	20.88	V	359	2.00
4	5,134.500	-50.81	-13.00	37.81	23.88	V	359	1.00

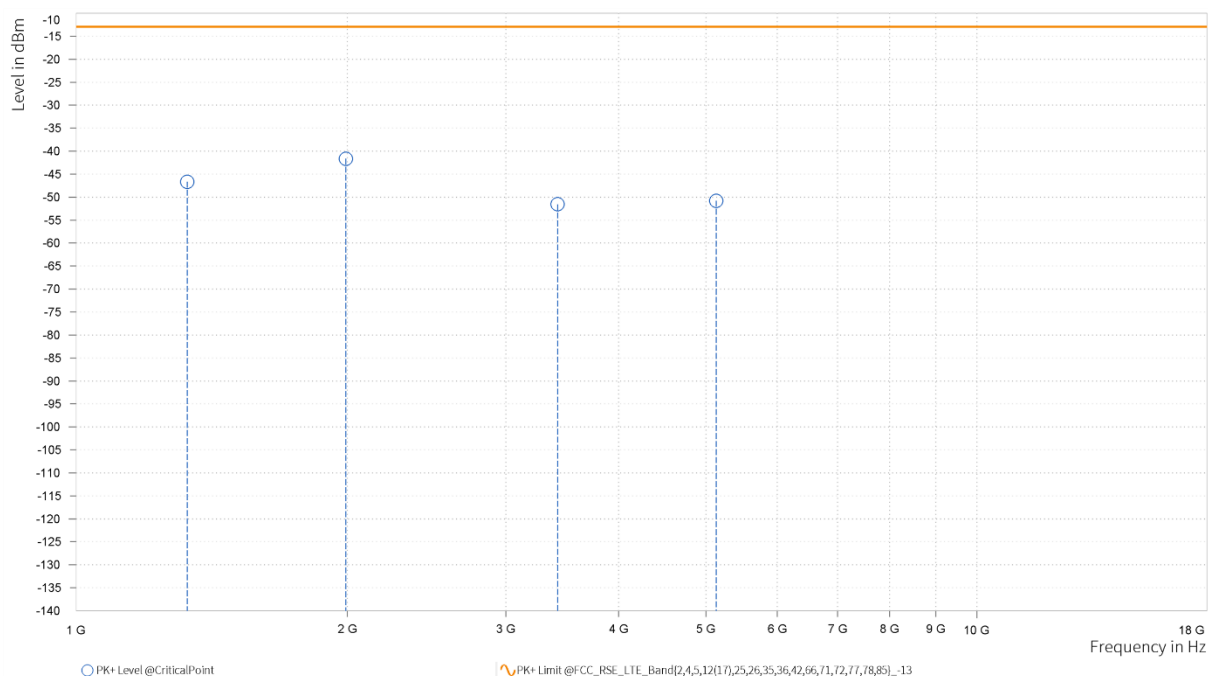

BOOMWAVE TEST (SHENZHEN)
CO., LTD.

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan
4th Road, Chiwan Community, Zhaoshang Street,
Nanshan District, Shenzhen, Guangdong, P.R. CHINA


Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: RF260714B017

CHANNEL BANDWIDTH: (20+30) MHz

MODE	TX channel 133322/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,348.000	-47.13	-13.00	34.13	23.24	H	358.6	1.00
2	2,022.000	-43.57	-13.00	30.57	27.89	H	1	1.00
4	3,463.000	-53.18	-13.00	40.18	20.28	H	34.4	2.00
4	5,194.500	-50.20	-13.00	37.20	23.82	H	34.4	2.00

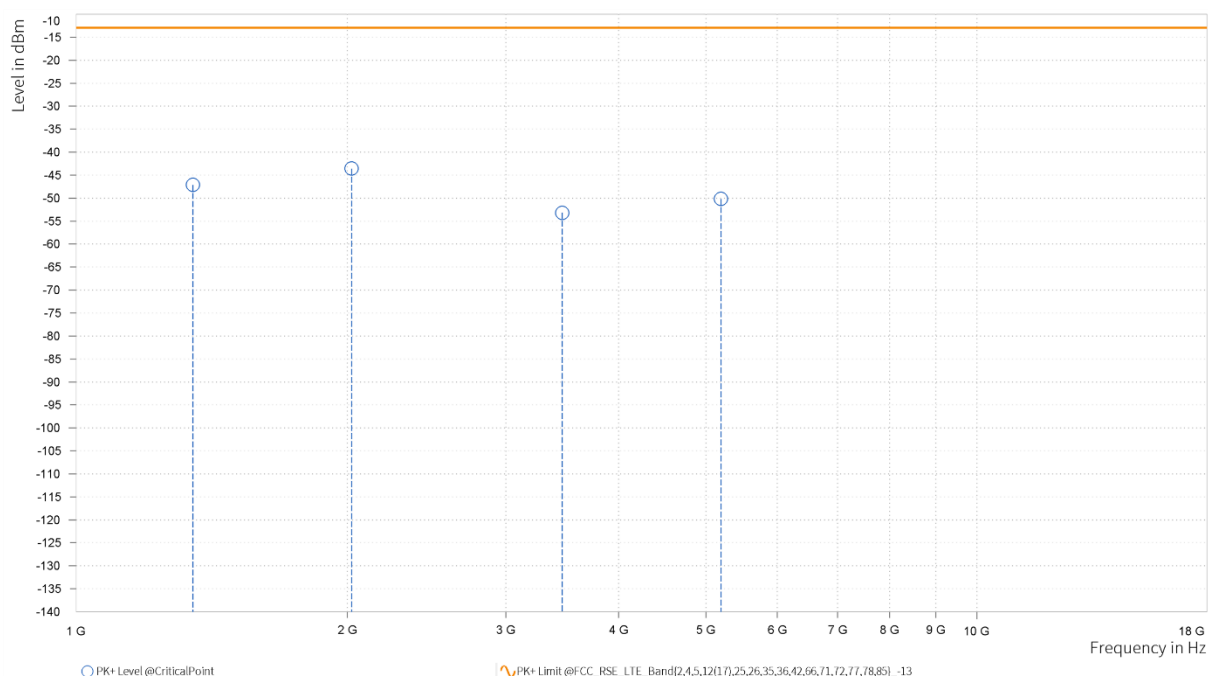

Test Report No.: RF260714B017

MODE	TX channel 133322/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,348.000	-46.79	-13.00	33.79	23.95	V	309.4	2.00
2	2,022.000	-43.83	-13.00	30.83	28.42	V	51.8	1.00
4	3,463.000	-51.75	-13.00	38.75	20.96	V	1	1.00
4	5,194.500	-49.48	-13.00	36.48	24.39	V	326.7	1.00

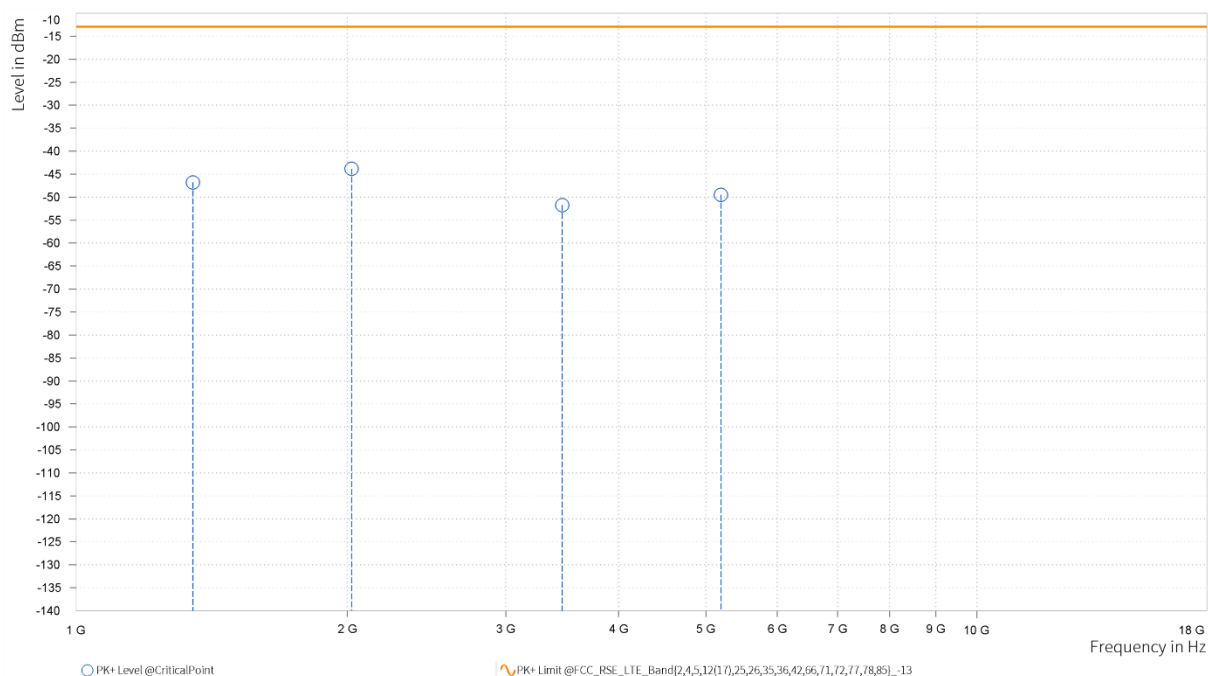


Test Report No.: RF260714B017

CHANNEL BANDWIDTH: (20+30) MHz

MODE	TX channel 133322/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,358.000	-45.97	-13.00	32.97	23.07	H	302.8	1.00
2	2,037.000	-45.54	-13.00	32.54	27.65	H	1	2.00
4	3,503.000	-51.30	-13.00	38.30	20.58	H	359	2.00
4	5,254.500	-48.34	-13.00	35.34	24.13	H	329.1	1.00

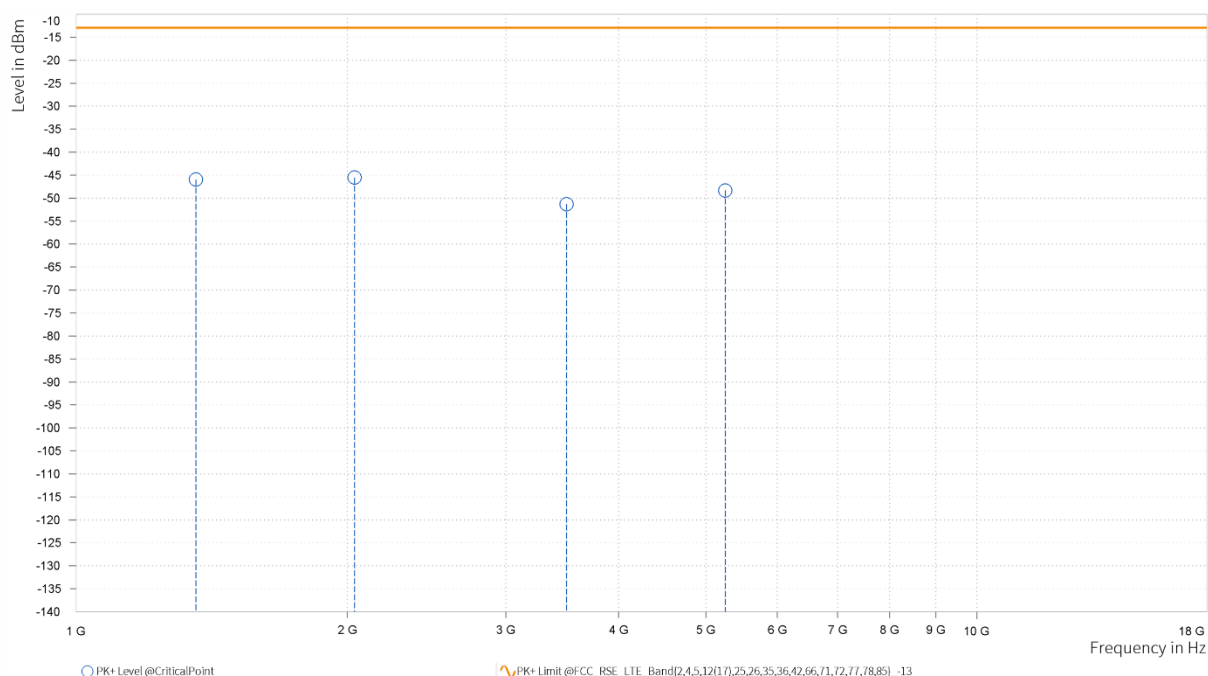

Test Report No.: RF260714B017

MODE	TX channel 133322/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,358.000	-46.56	-13.00	33.56	24.09	V	1	2.00
2	2,037.000	-43.97	-13.00	30.97	28.20	V	1	2.00
4	3,503.000	-52.05	-13.00	39.05	21.33	V	343.6	1.00
4	5,254.500	-48.74	-13.00	35.74	24.61	V	0.9	2.00

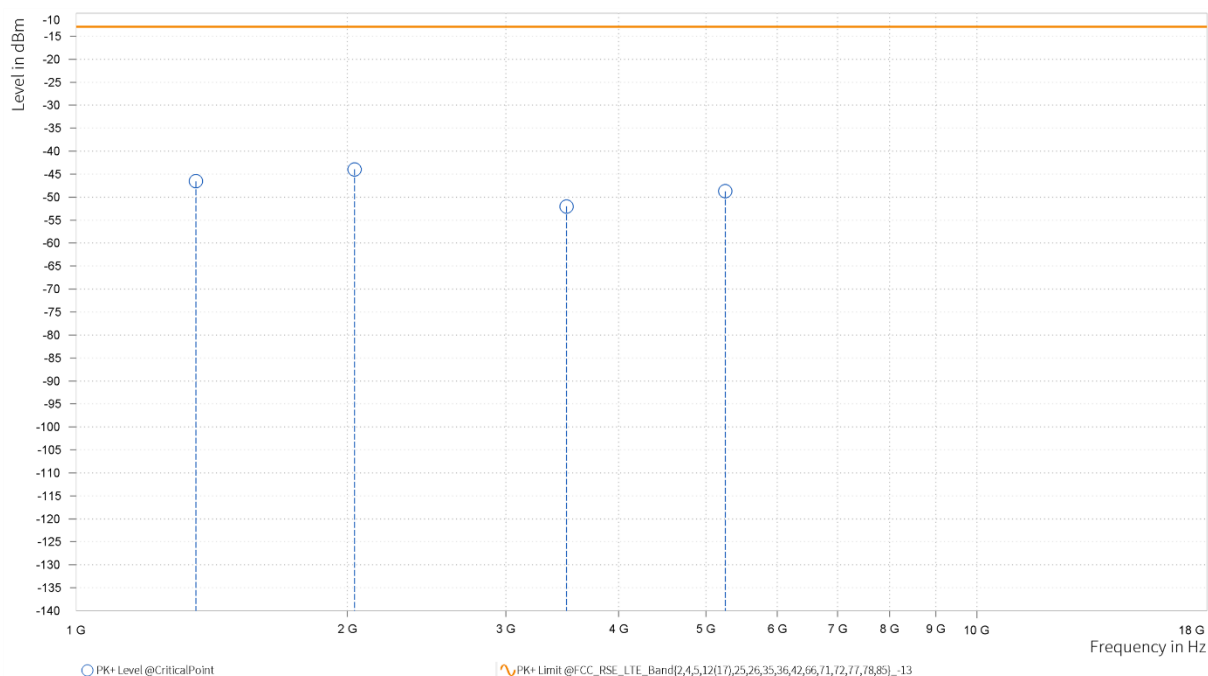


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

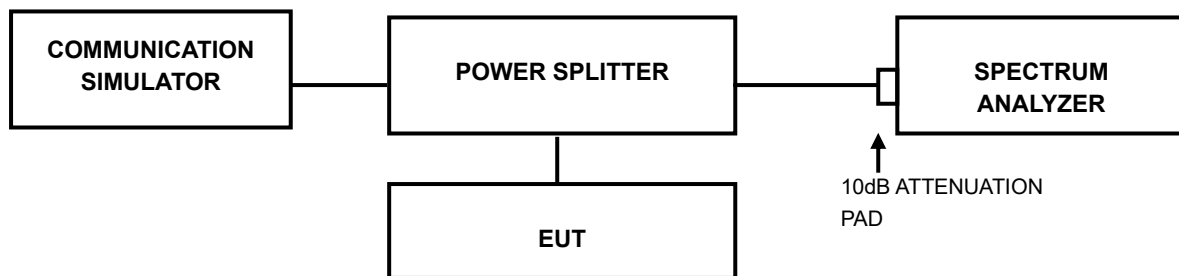

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: RF260714B017

3.7.4 TEST RESULTS

Please Refer to Appendix A report Of this project.

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF260714B017

5 INFORMATION ON THE TESTING LABORATORIES

We, BOOMWAVE TEST (SHENZHEN) CO., LTD., were founded in 2025 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

BOOMWAVE TEST (SHENZHEN) CO., LTD.

Lab Address:

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan 4th Road, Chiwan Community, Zhaoshang Street, Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Accredited Test Lab Cert 7607.01

Shenzhen EMC/RF Lab:

Mobile: +86 15118052731

Email: shimin.wang@boomwavelab.com

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--END--