




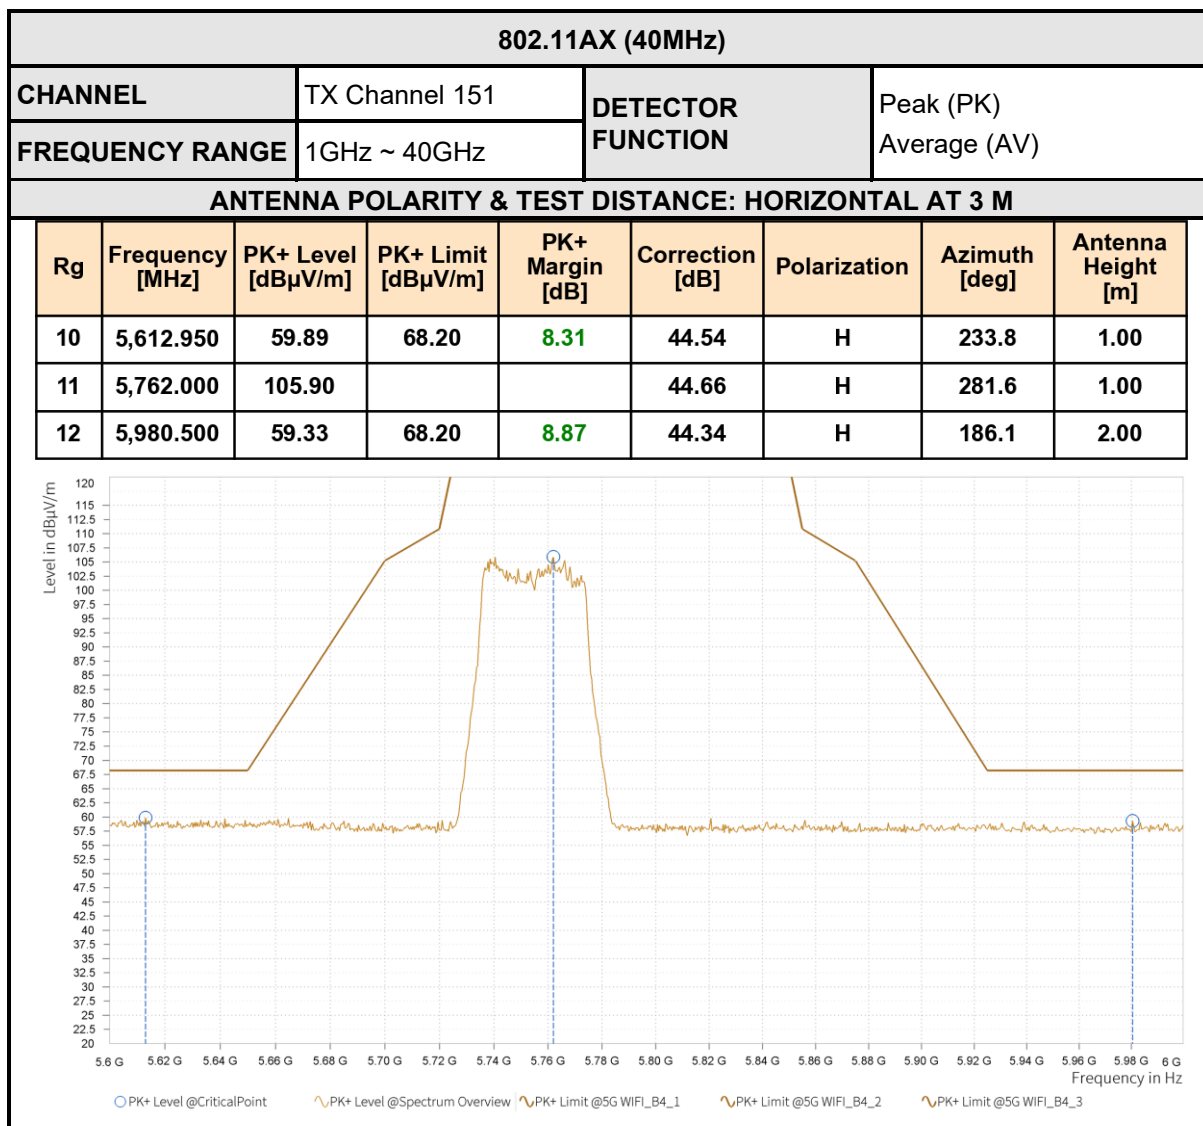


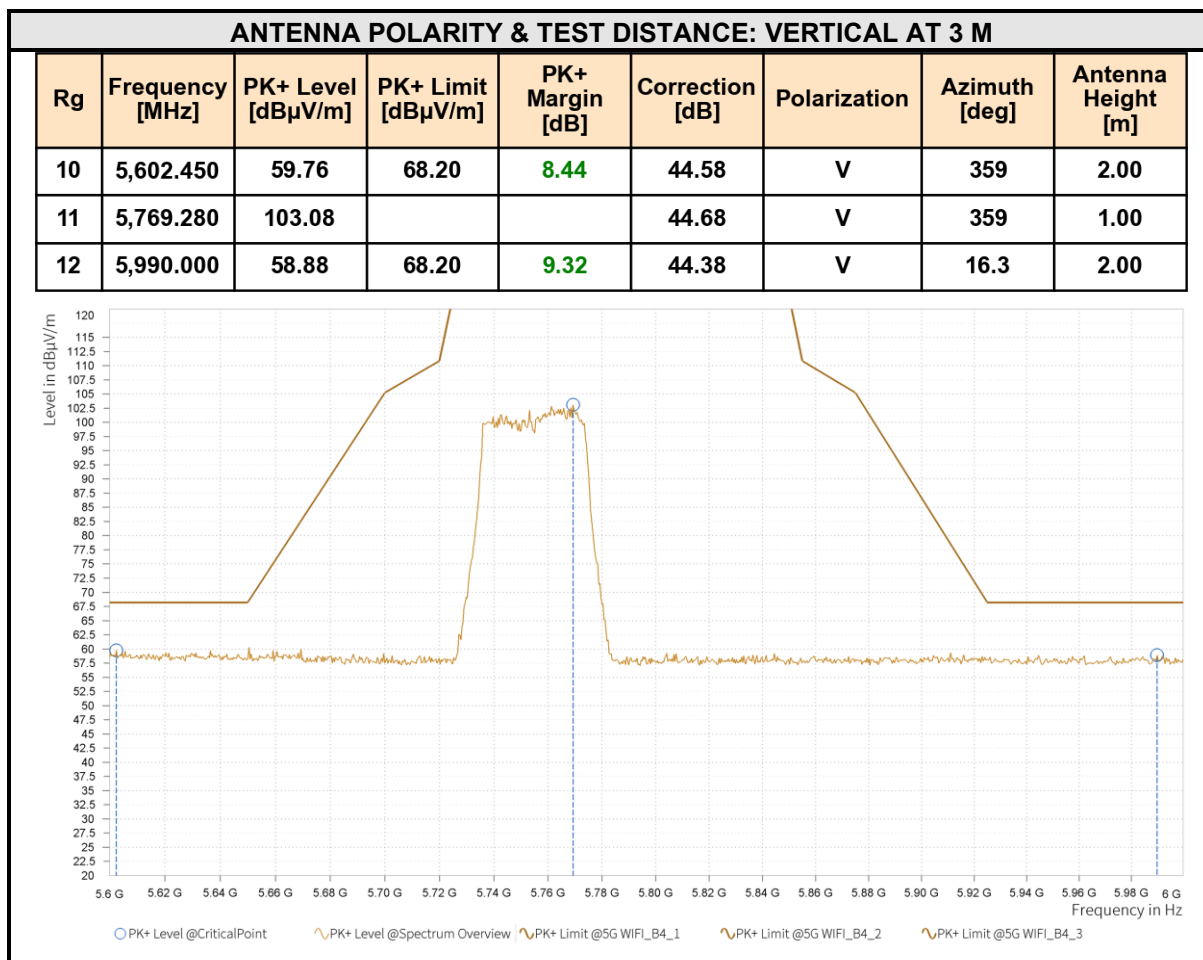

REMARKS:


1. Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
2. Margin value = Limit value- Emission level.
3. 5755MHz: Fundamental frequency.

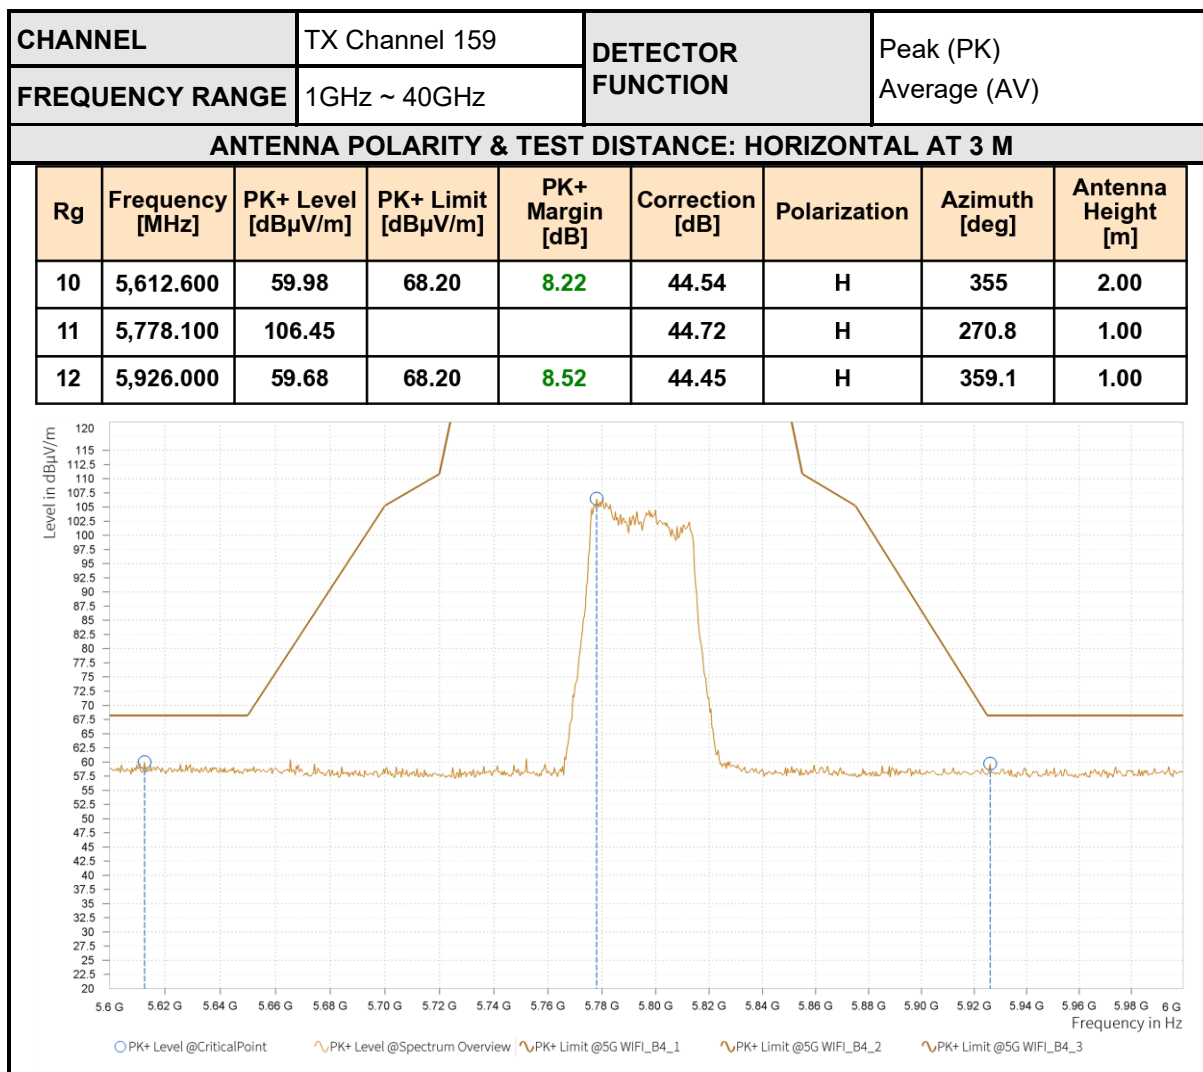

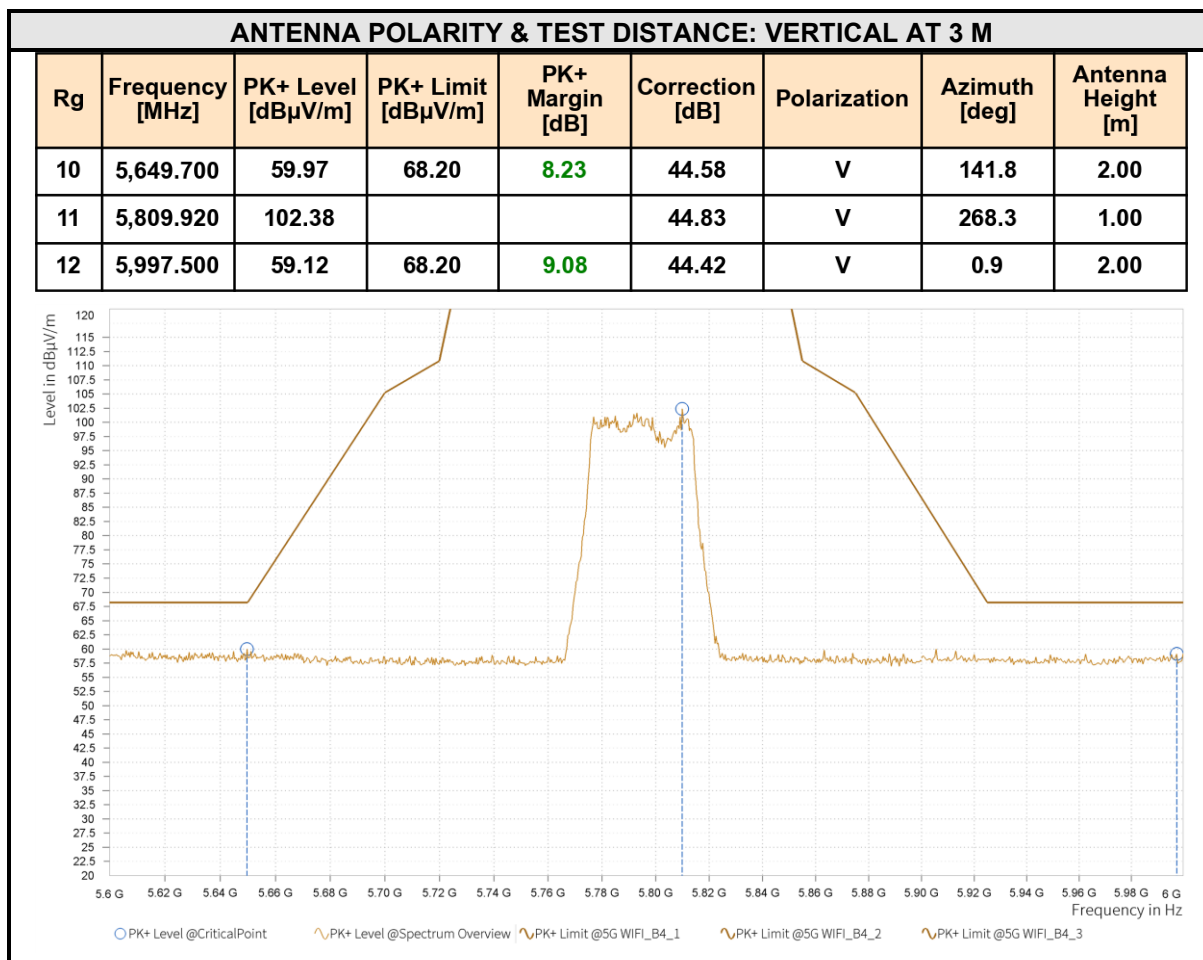


REMARKS:

1. Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
2. Margin value = Limit value- Emission level.
3. 5795MHz: Fundamental frequency.

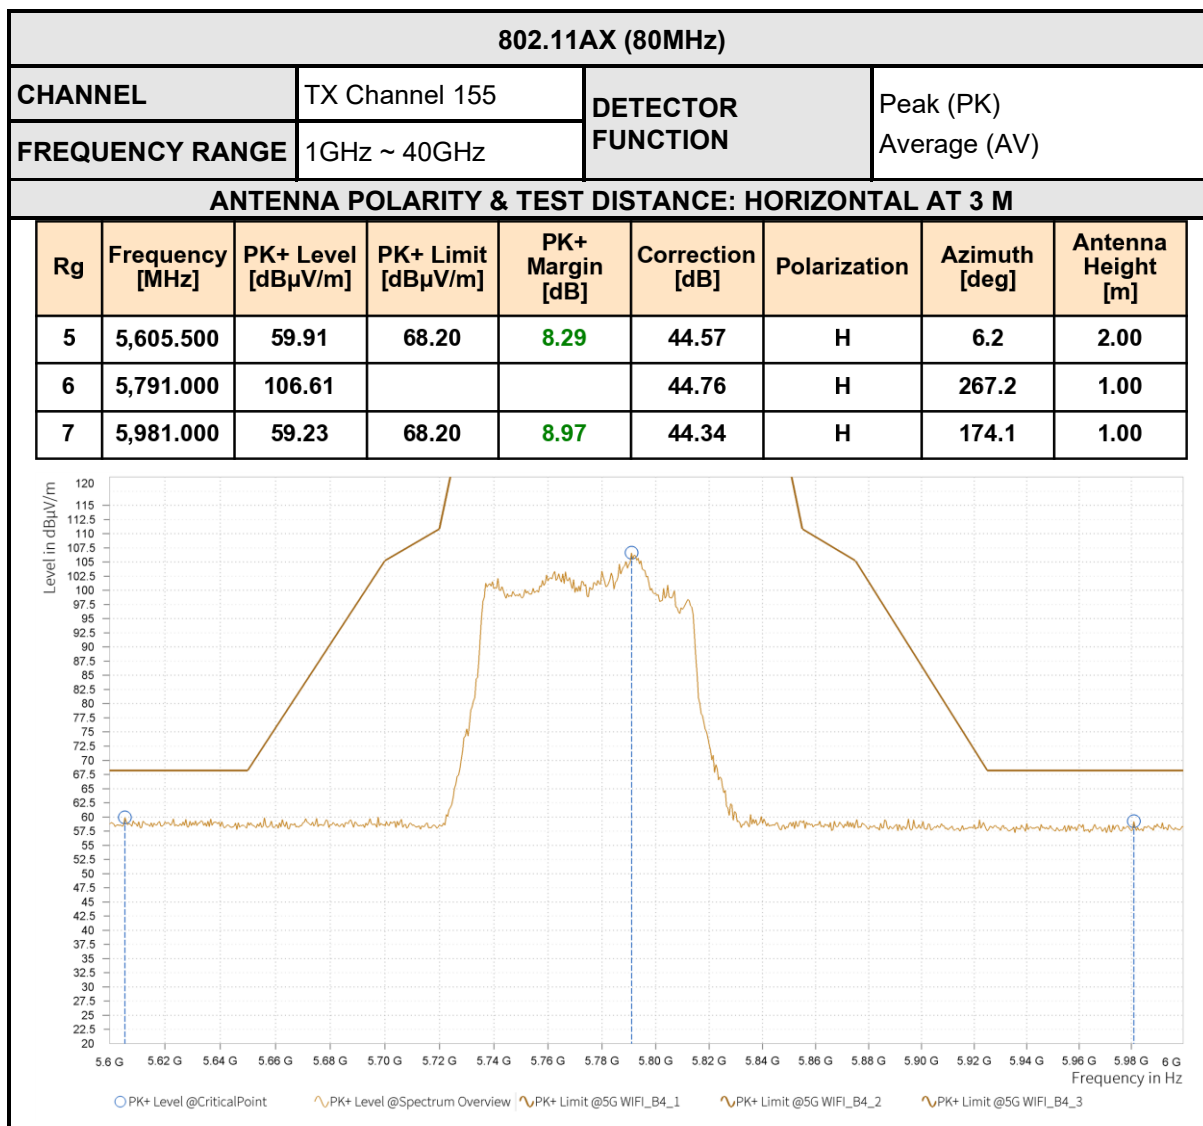

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,643.000	59.87	68.20	8.33	44.56	V	1	1.00
6	5,772.000	101.41			44.69	V	359	2.00
7	5,945.000	59.36	68.20	8.84	44.31	V	191.8	1.00

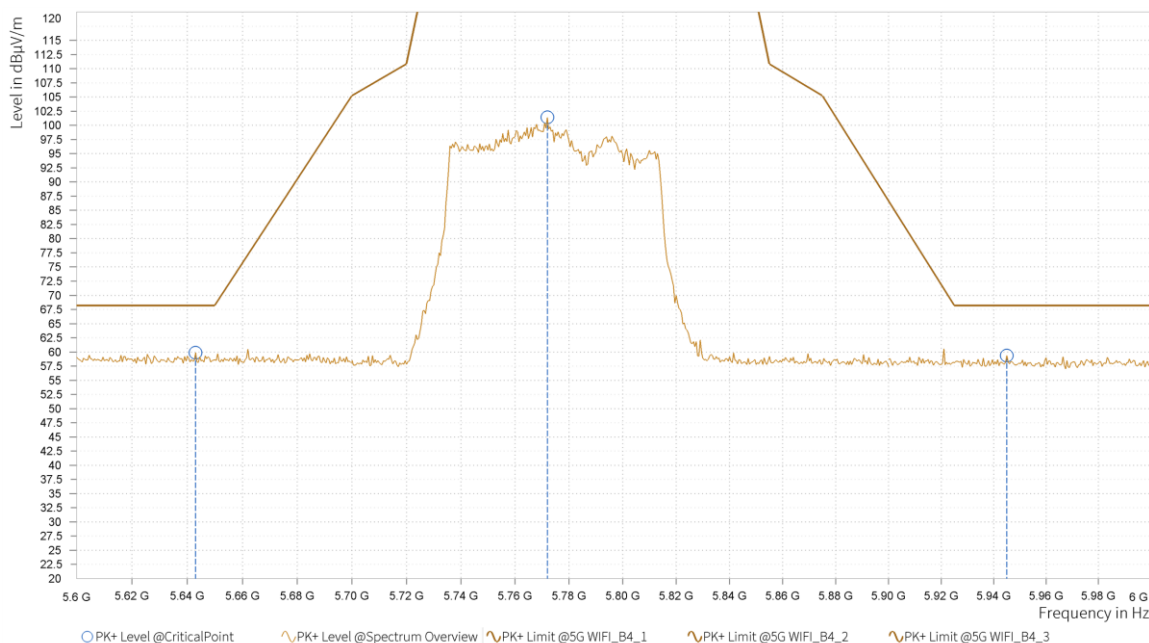


REMARKS:

- Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- Margin value = Limit value- Emission level.
- 5775MHz: Fundamental frequency.


Test Report No.: RF260714B015

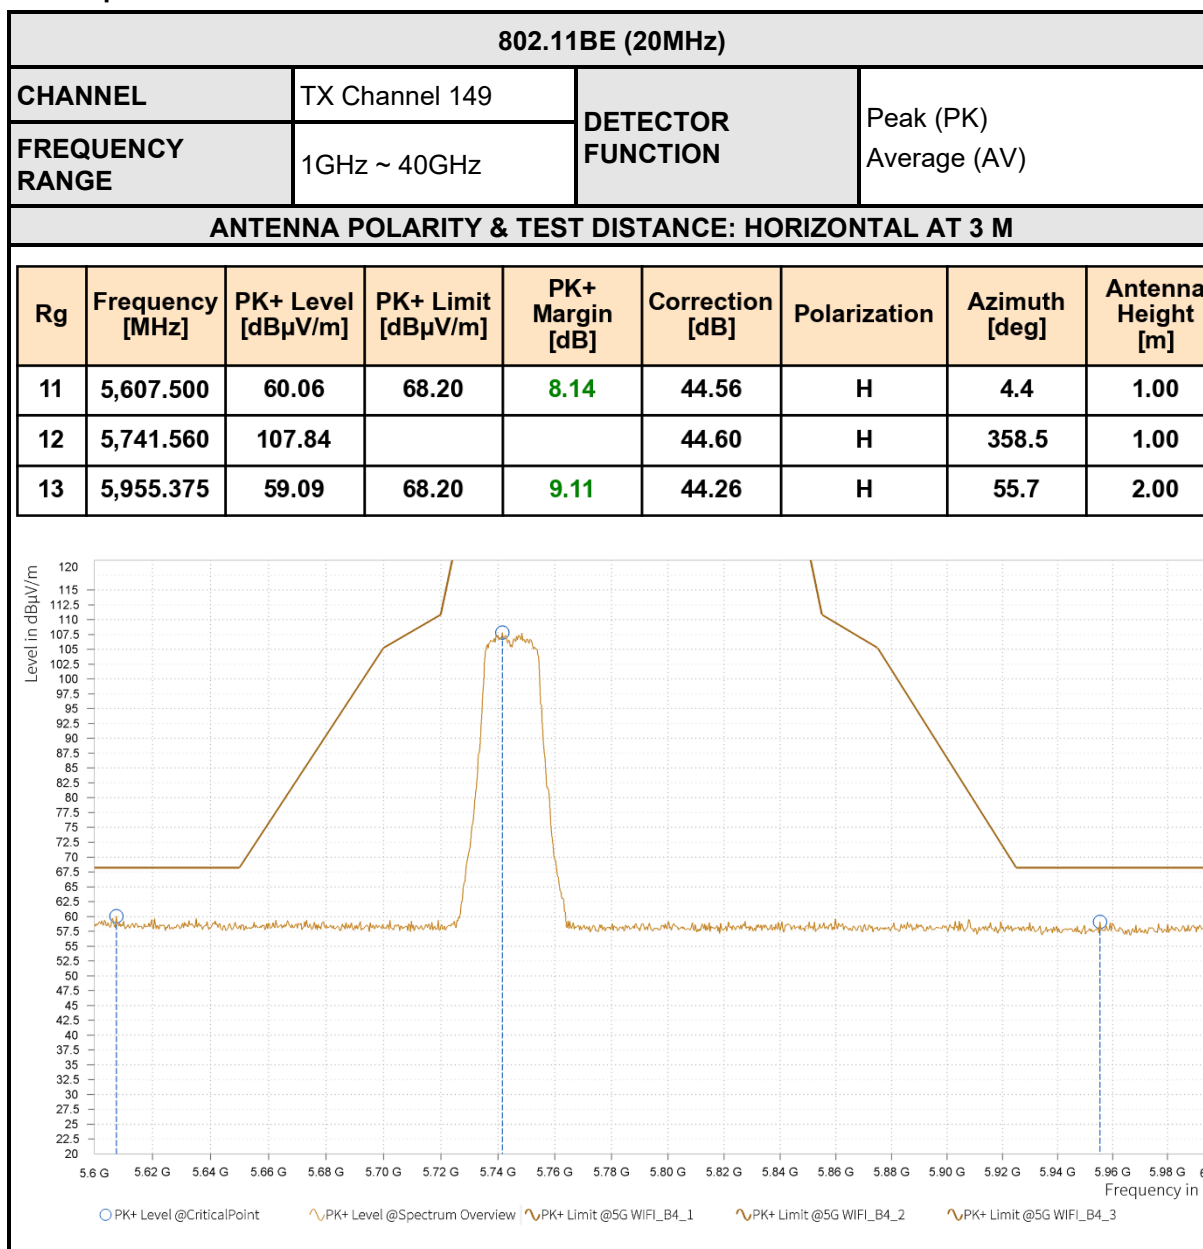


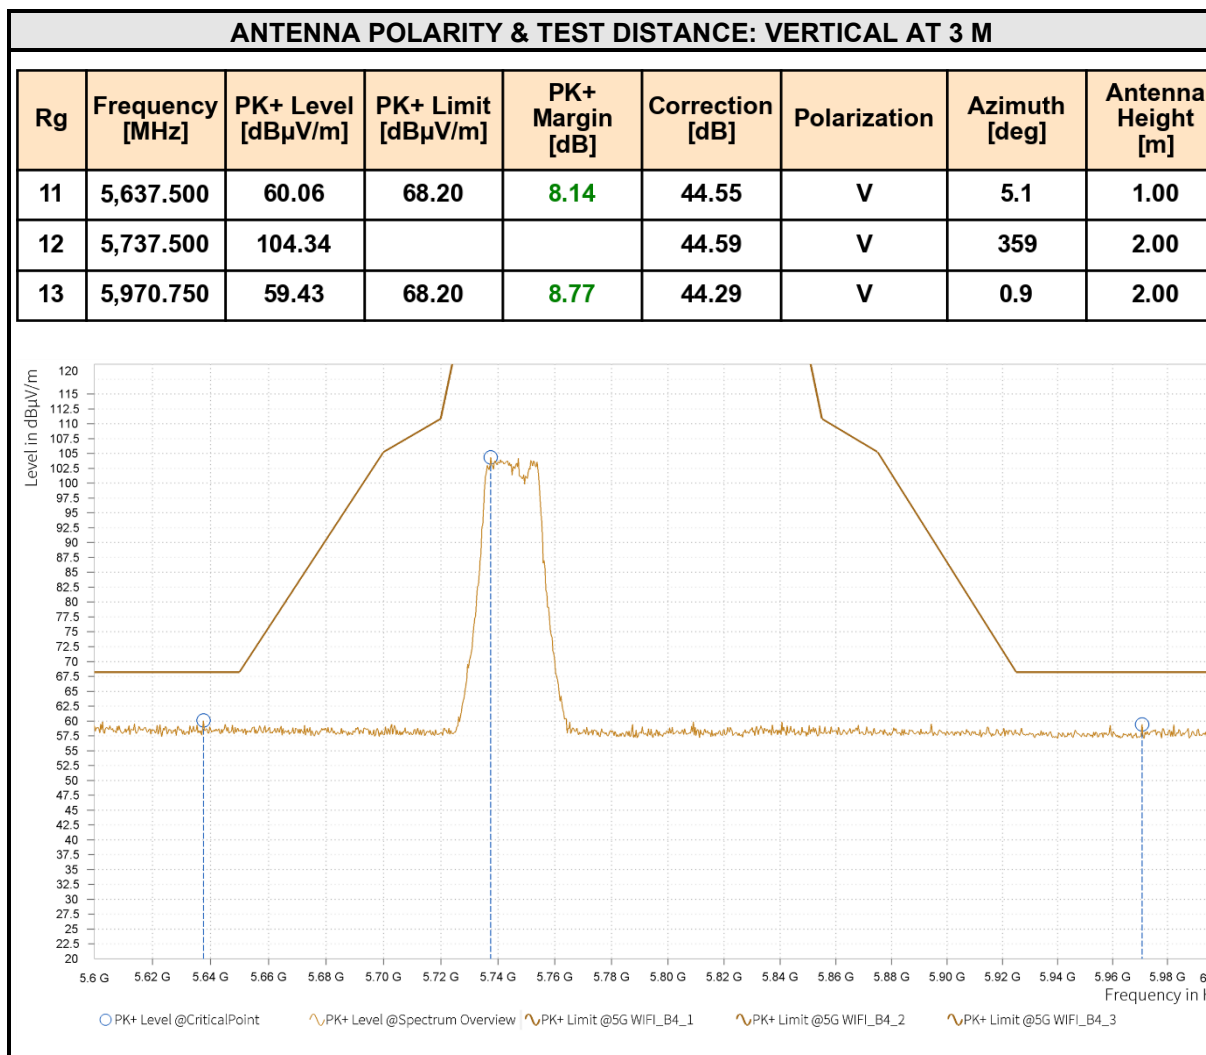

REMARKS:


13. Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
14. Margin value = Limit value- Emission level.
15. 5745MHz: Fundamental frequency.

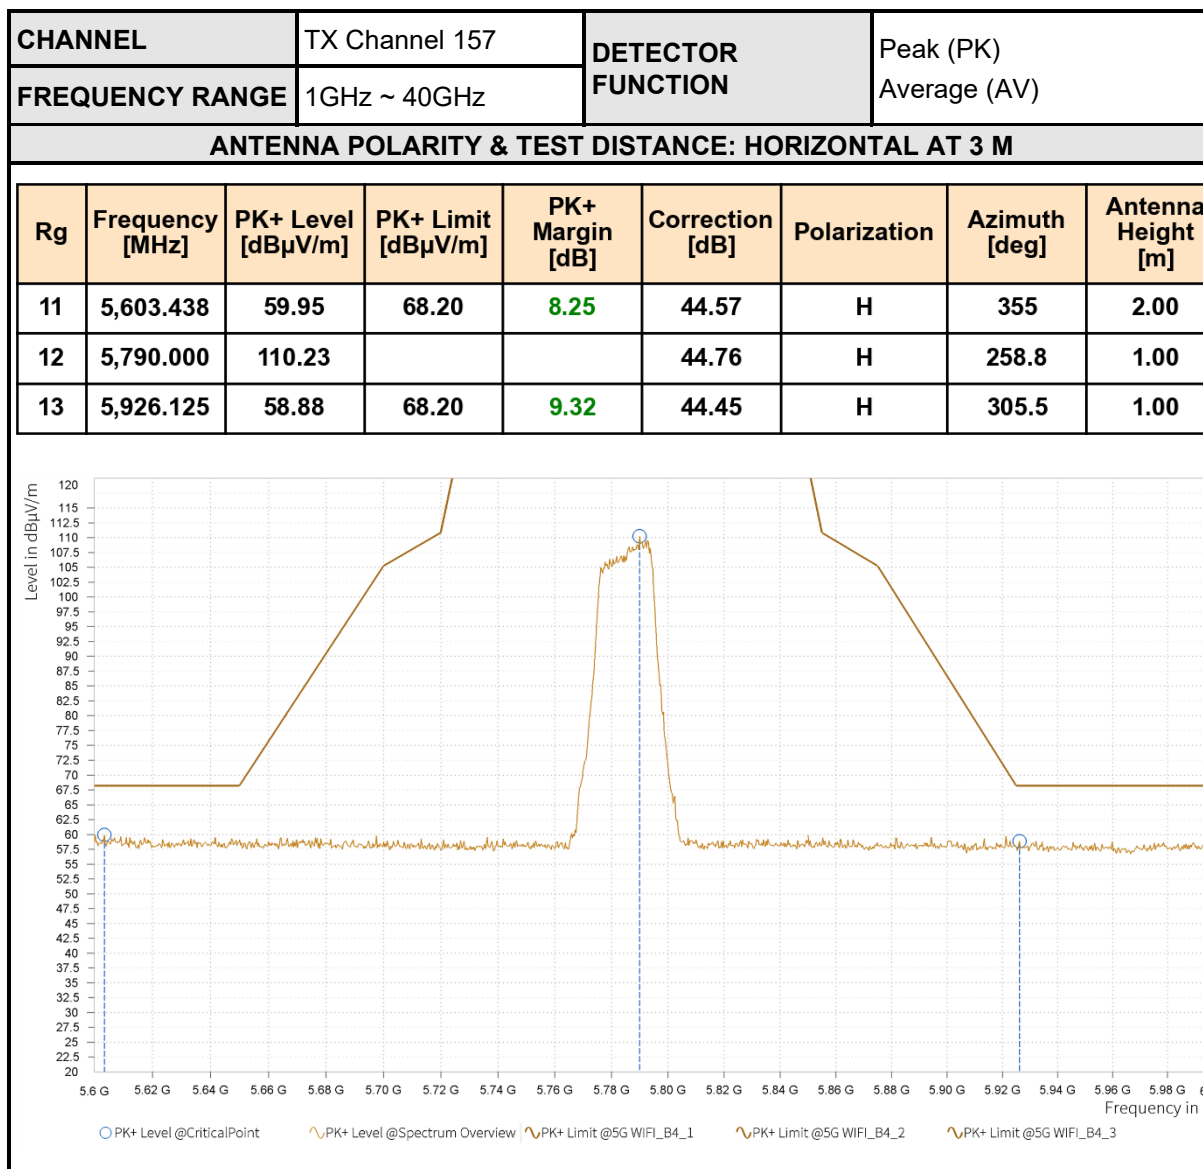


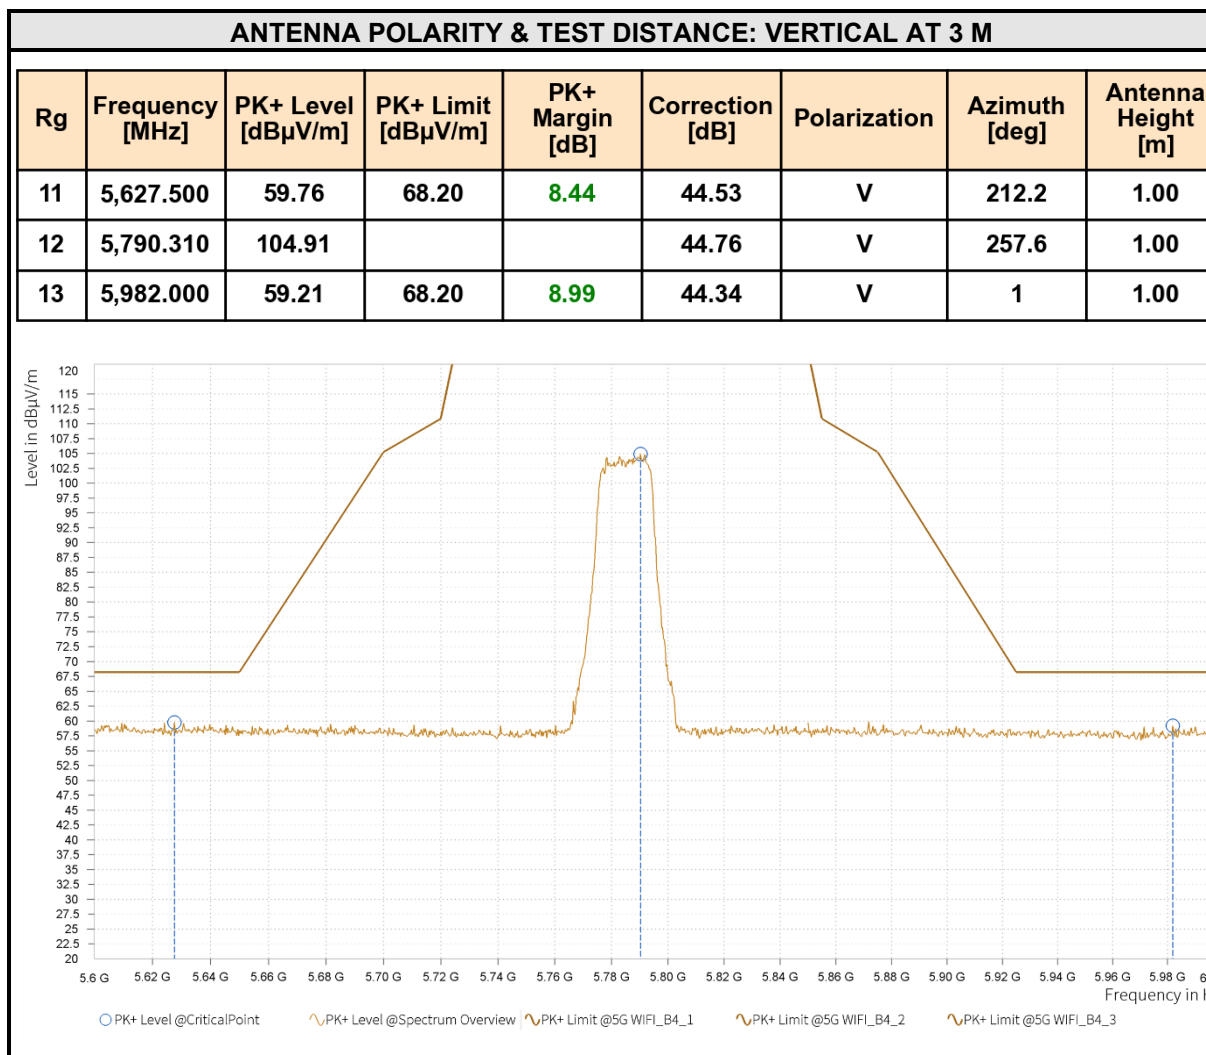

REMARKS:


- Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- Margin value = Limit value- Emission level.
- 5785MHz: Fundamental frequency.

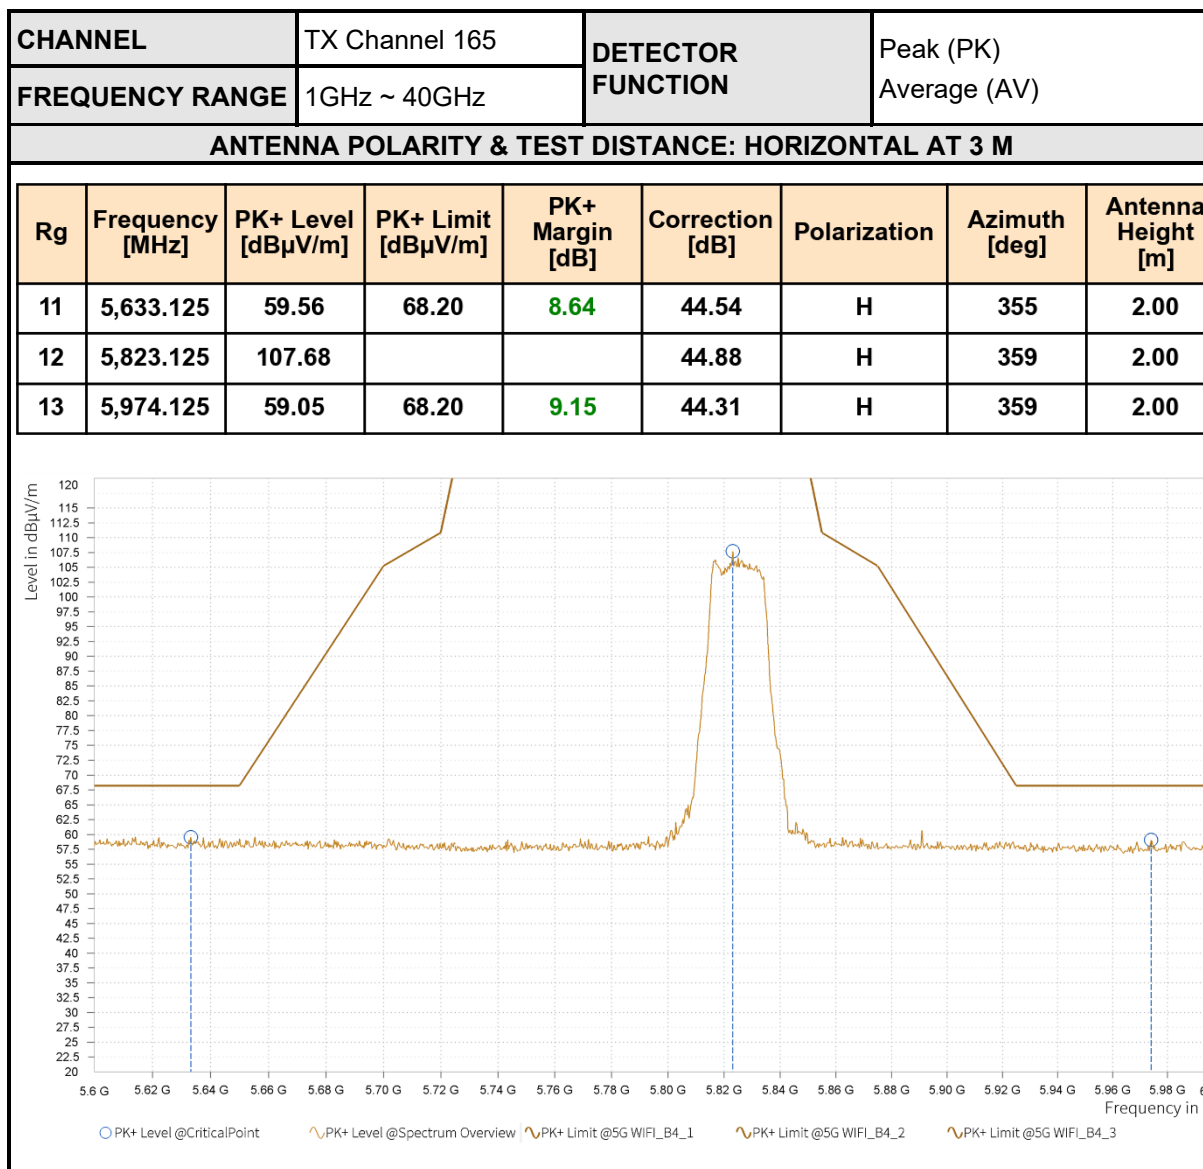


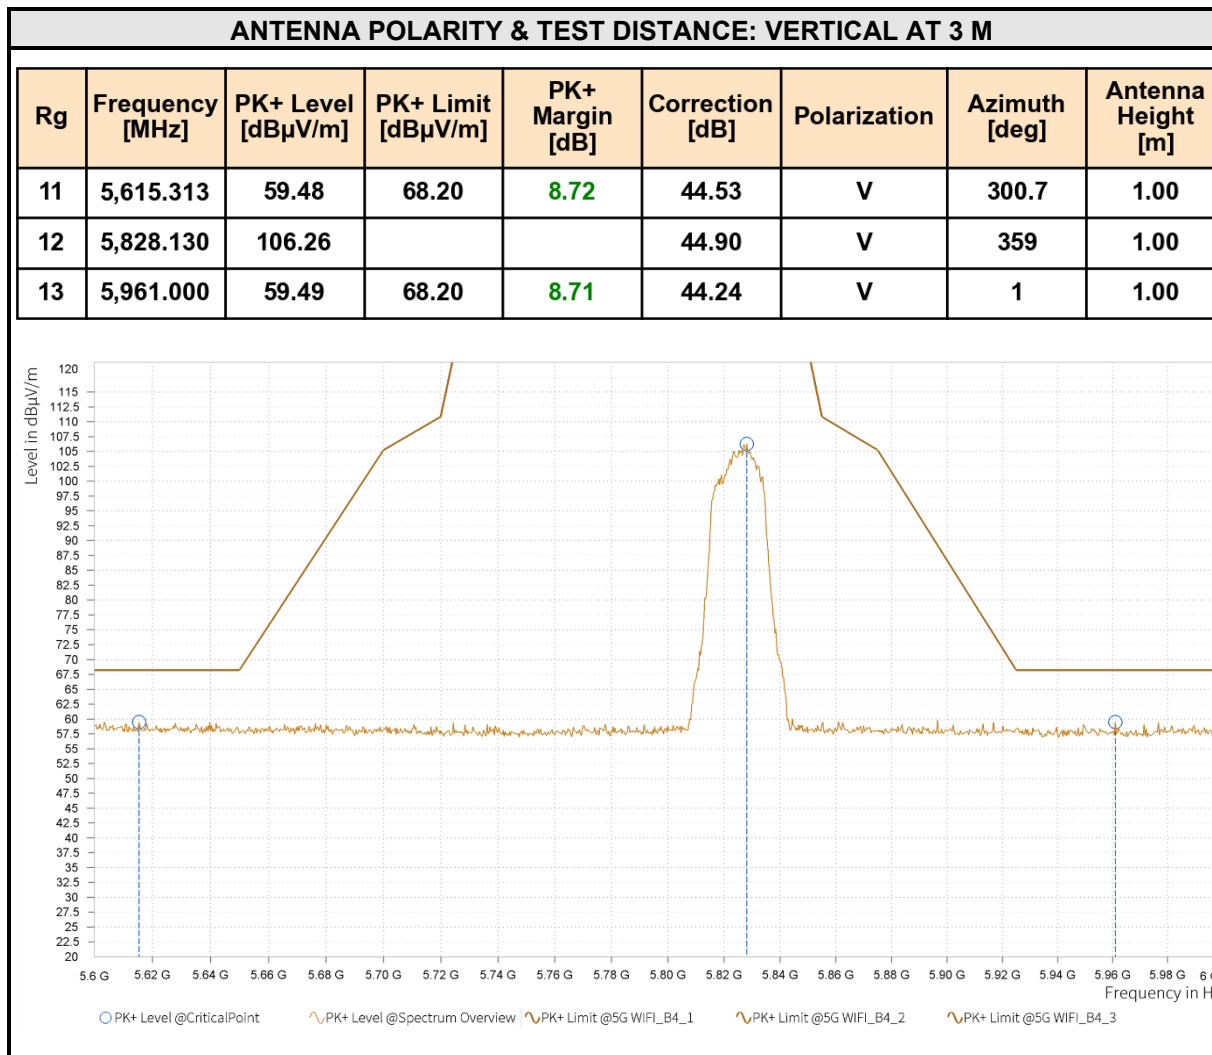

REMARKS:


13. Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
14. Margin value = Limit value- Emission level.
15. 5825MHz: Fundamental frequency.

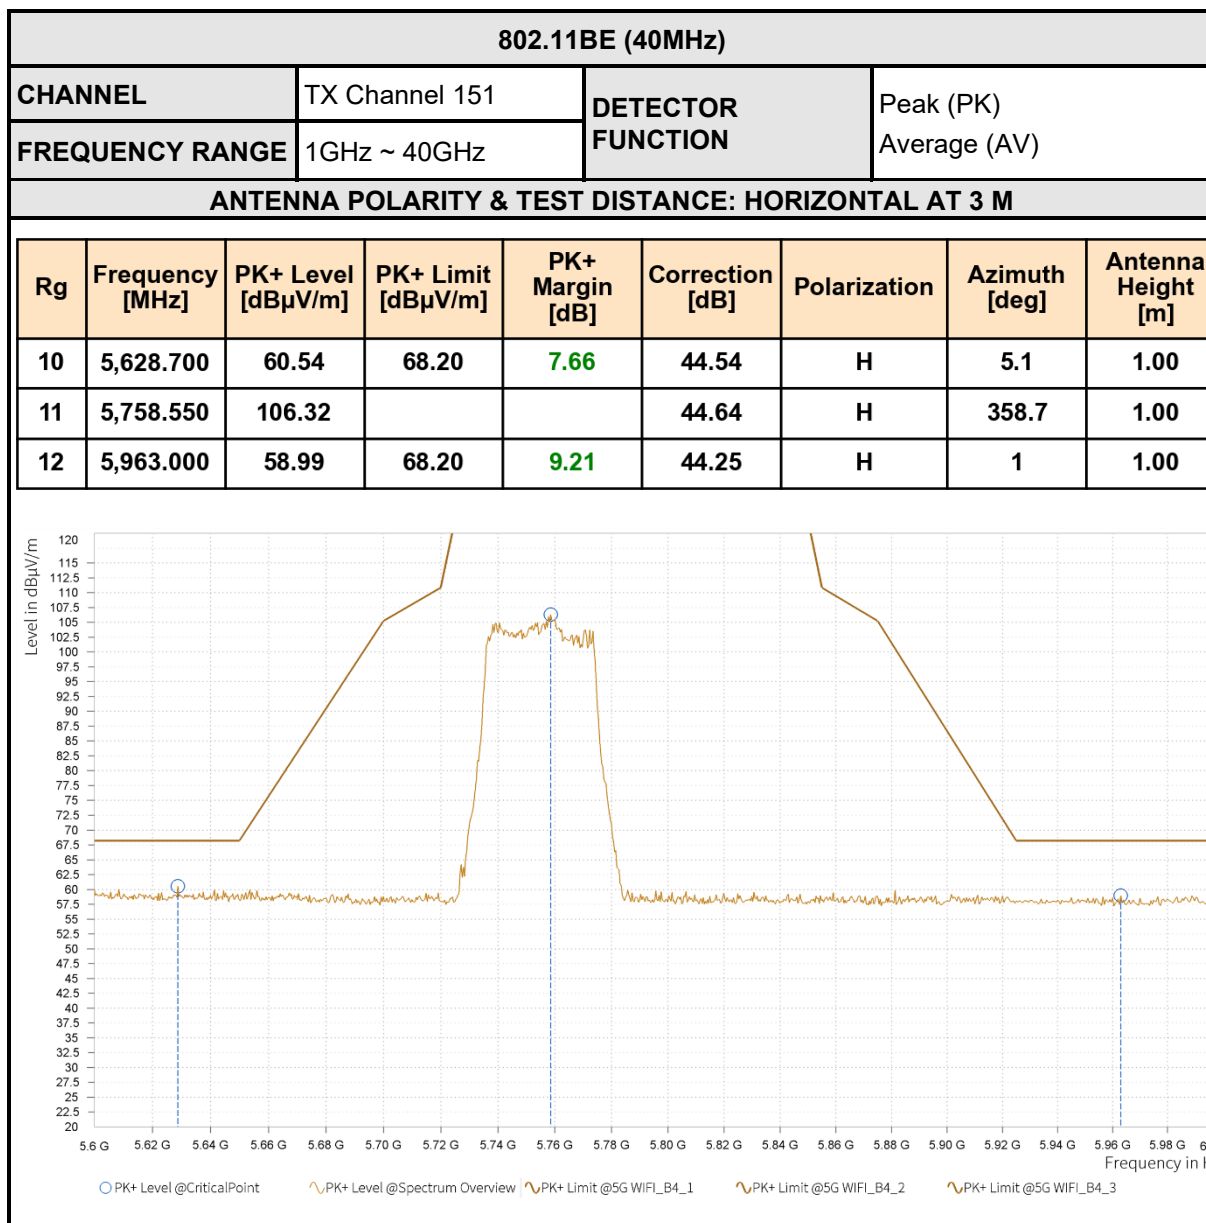


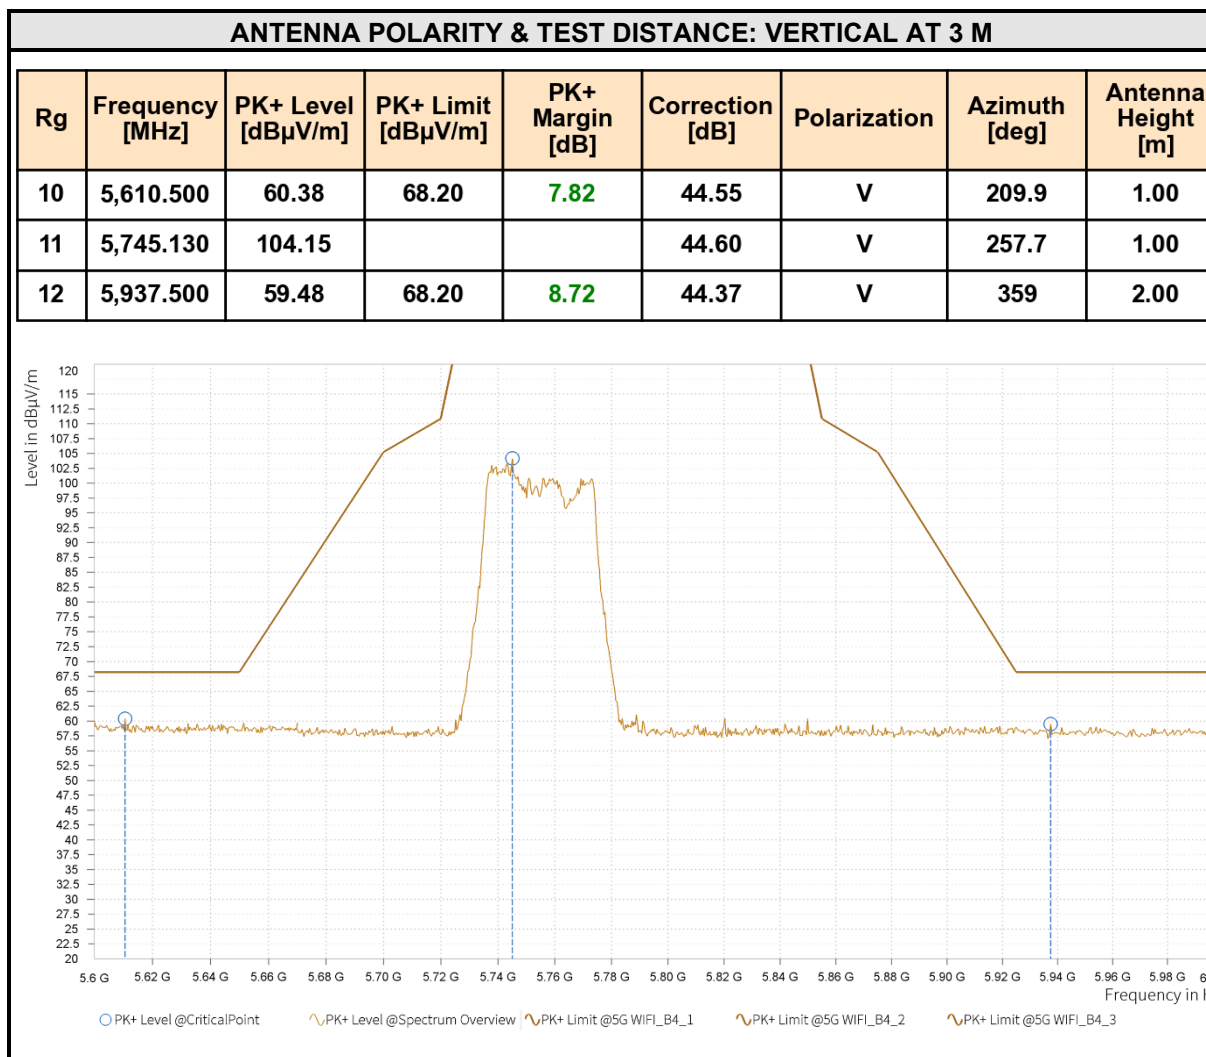

REMARKS:


- Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- Margin value = Limit value- Emission level.
- 5755MHz: Fundamental frequency.

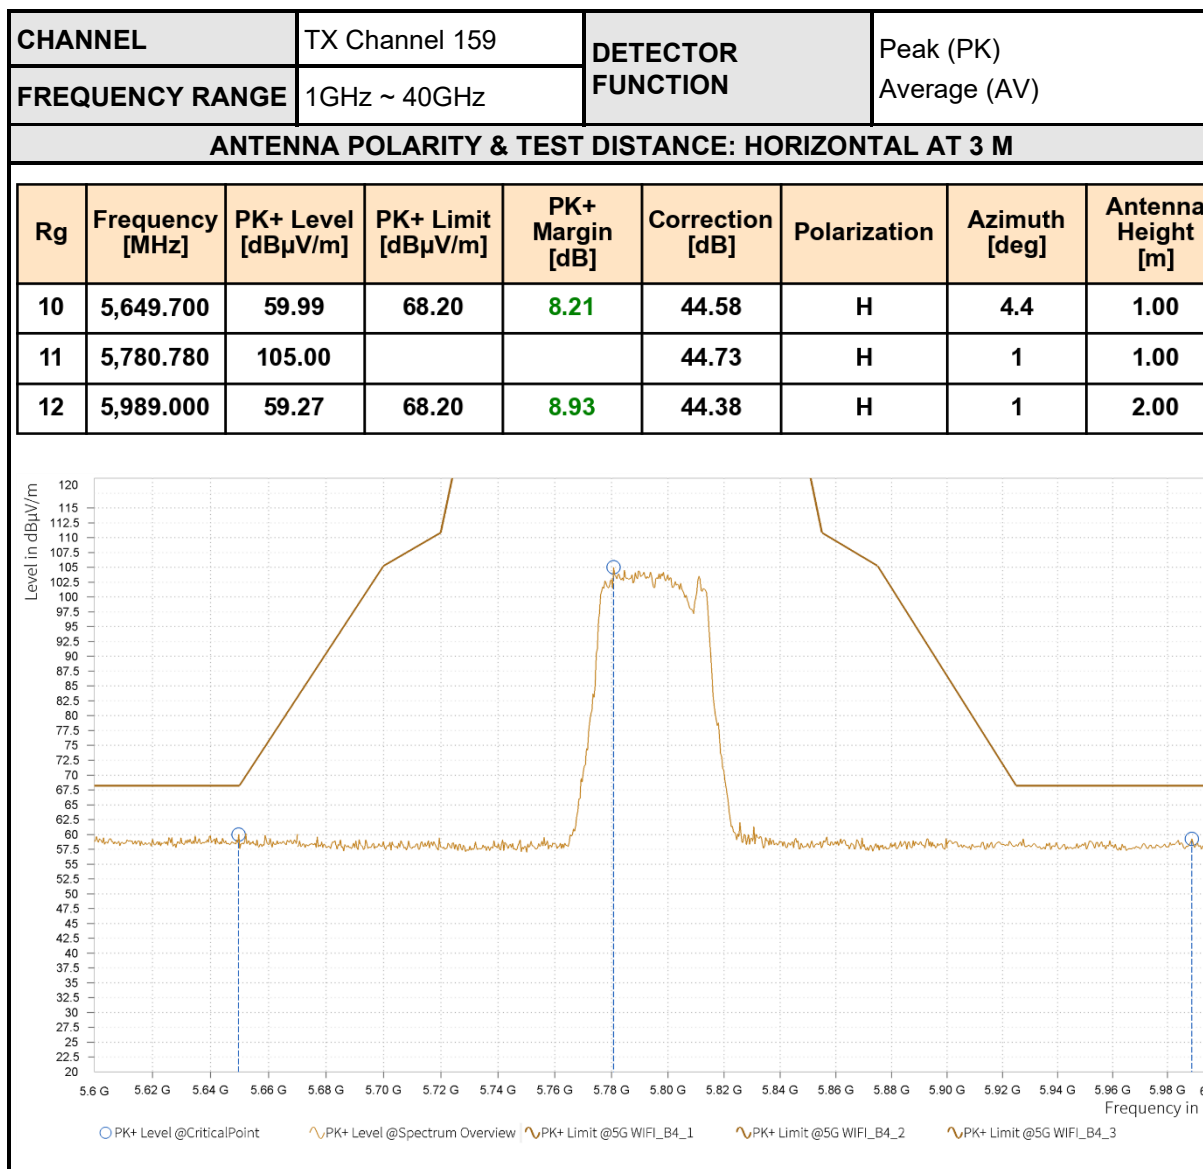


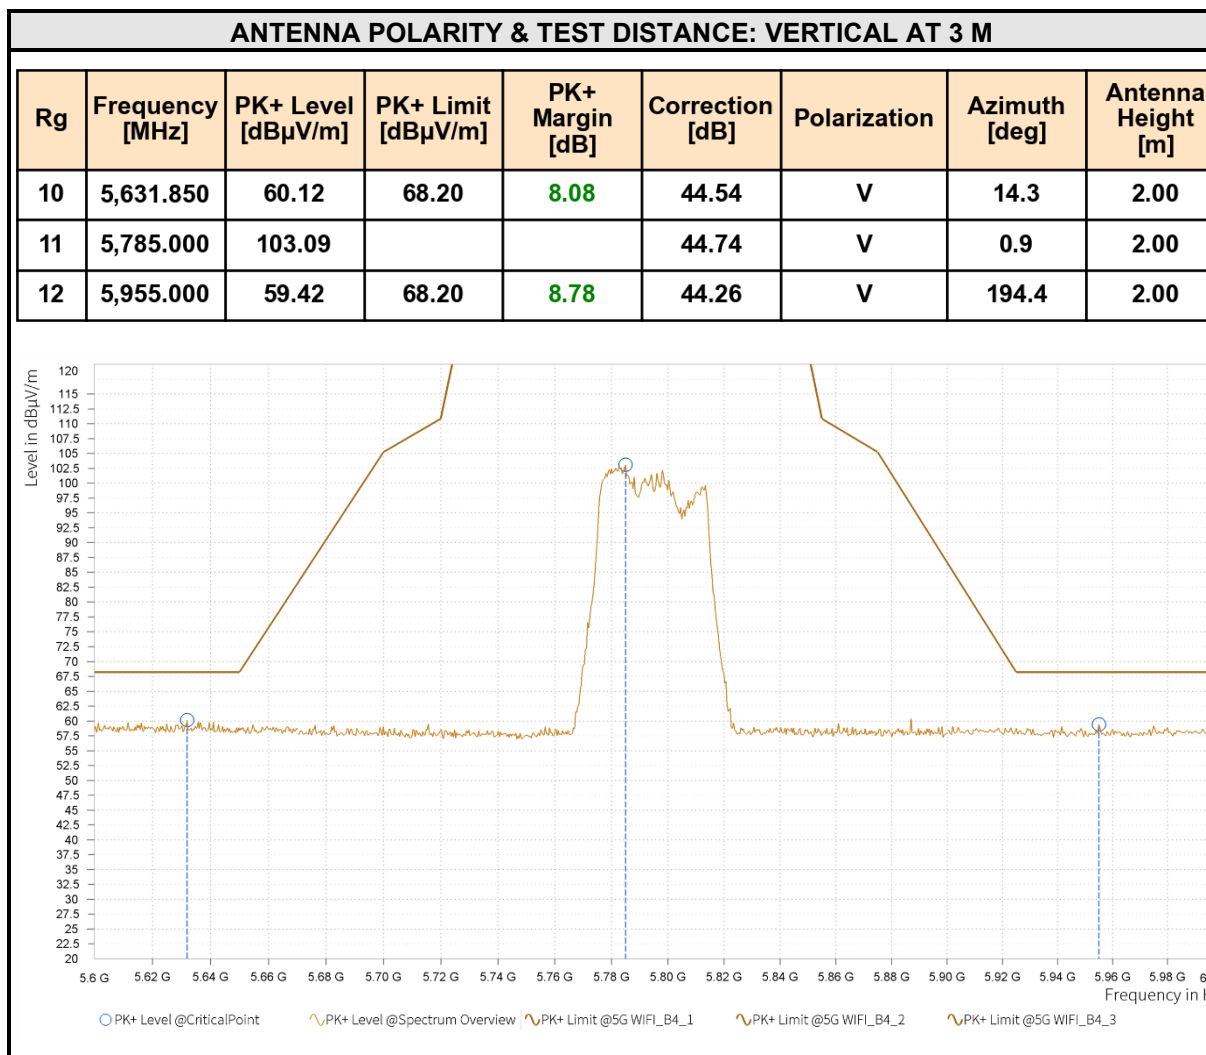

REMARKS:

- Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- Margin value = Limit value- Emission level.
- 5795MHz: Fundamental frequency.

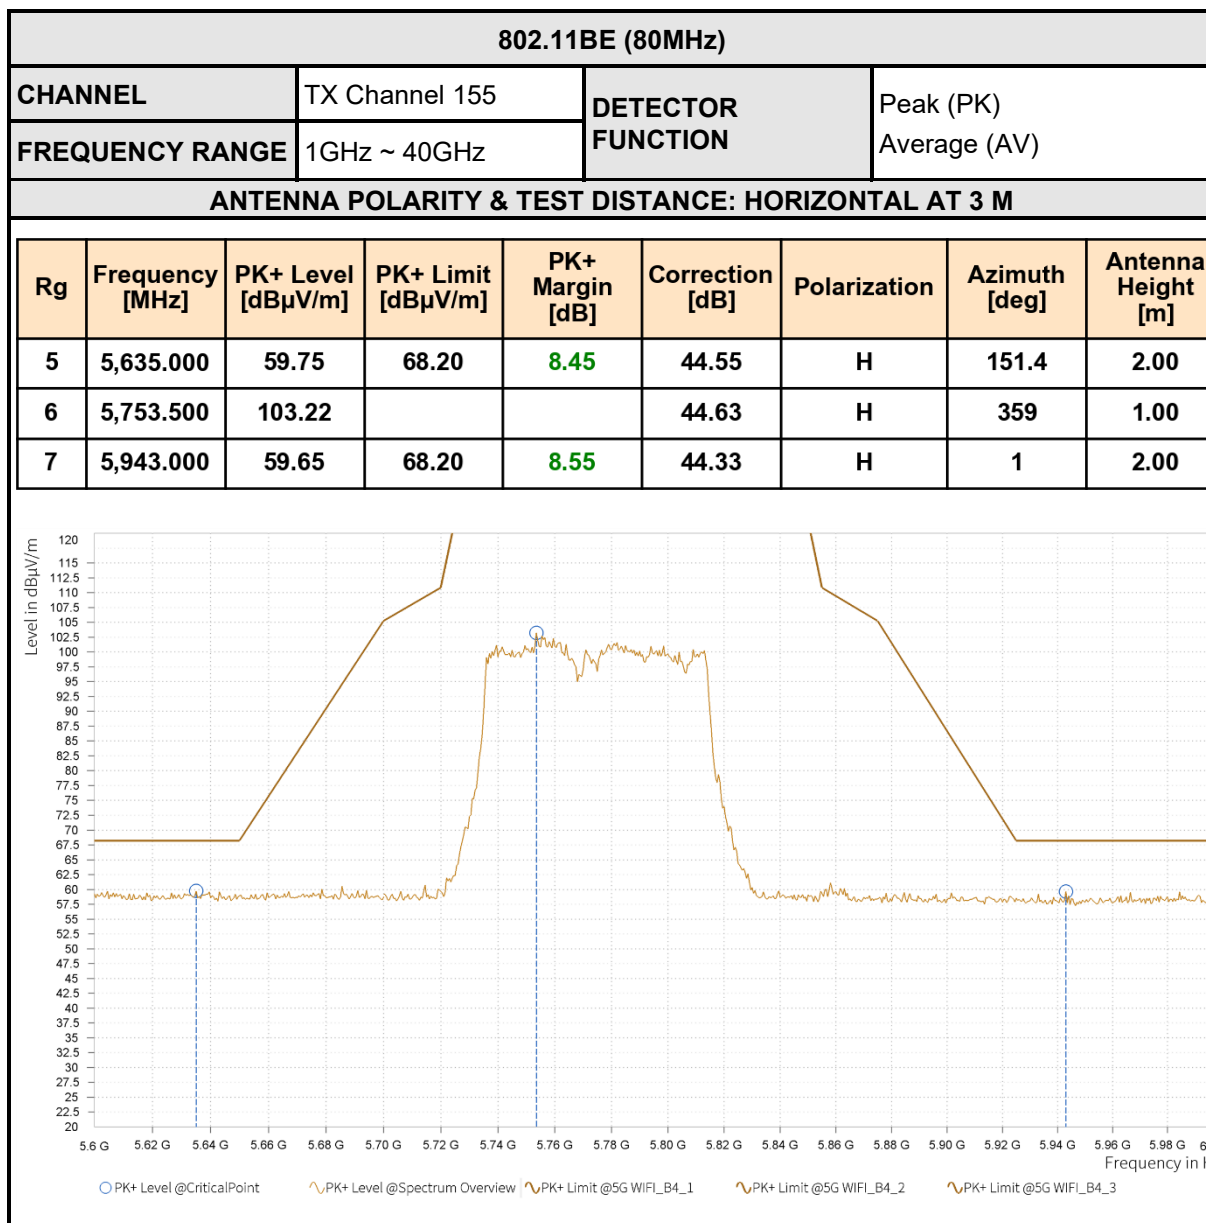


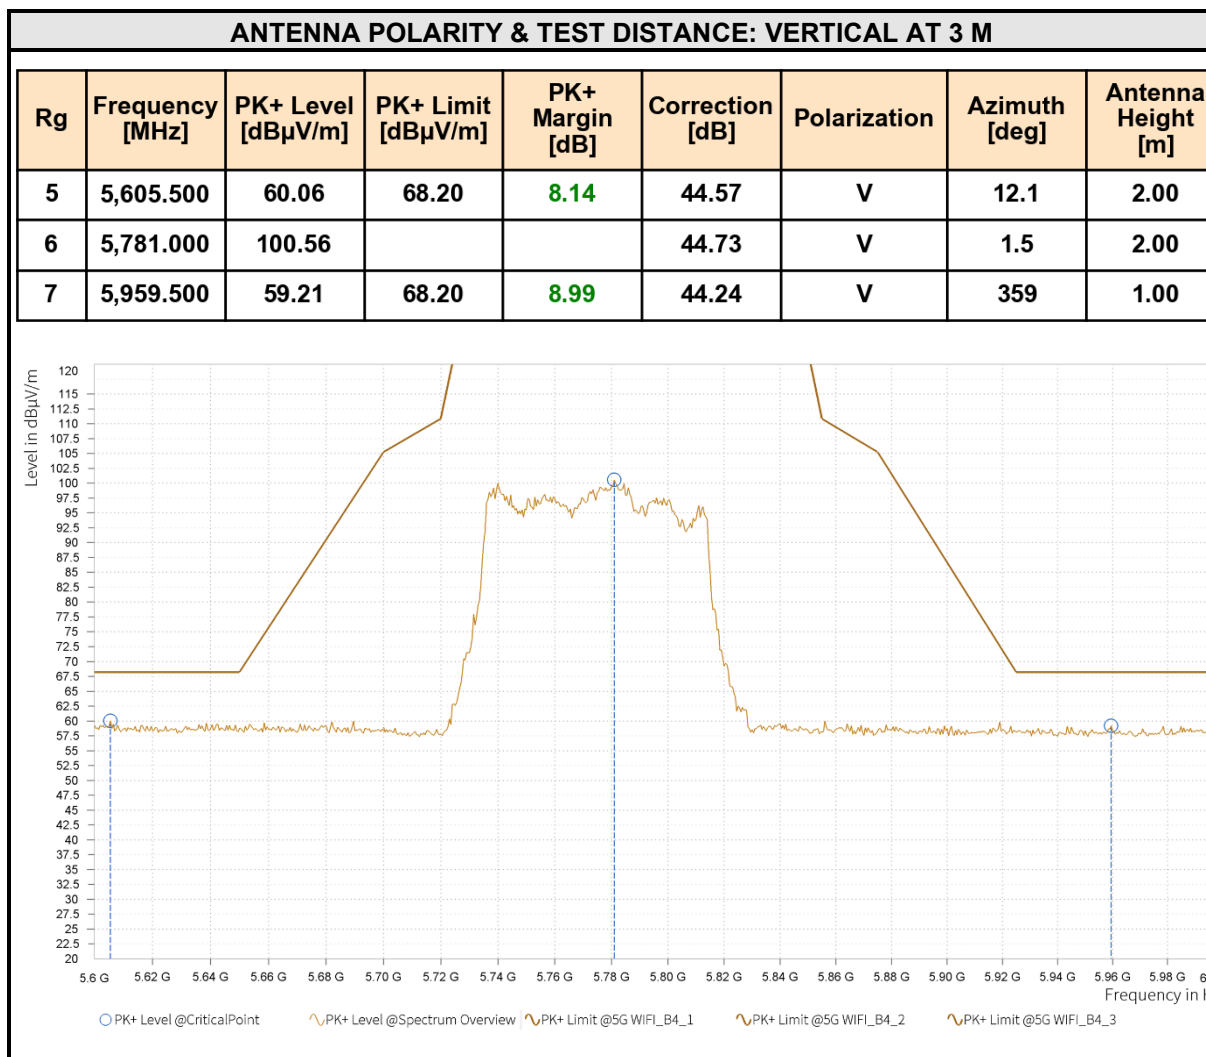


REMARKS:

- Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- Margin value = Limit value- Emission level.
- 5775MHz: Fundamental frequency.

Test Report No.: RF260714B015

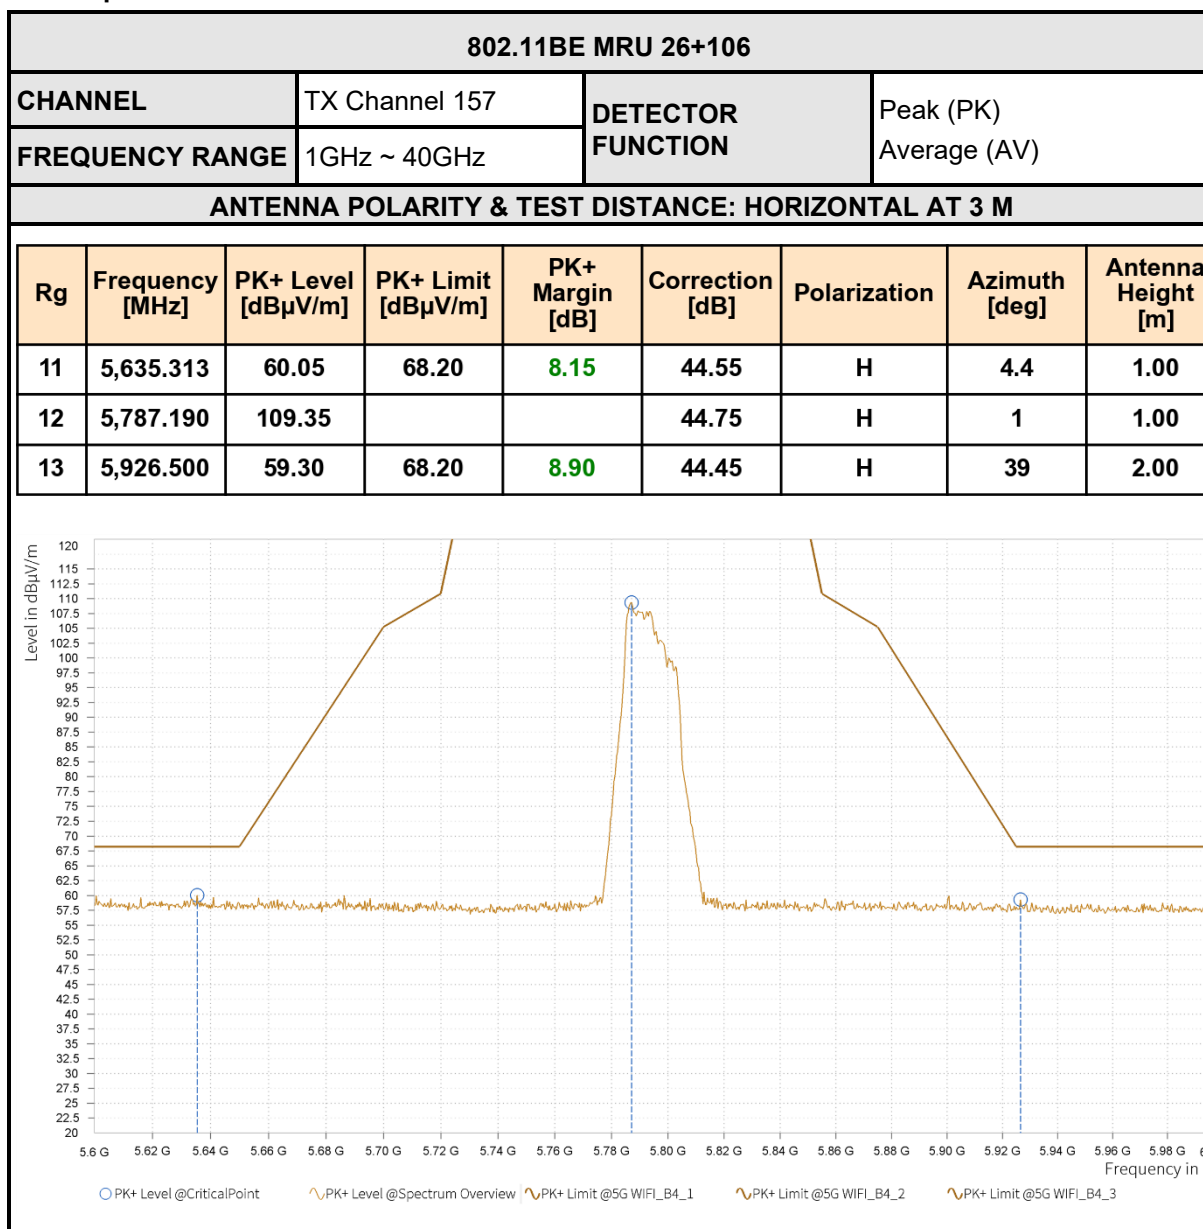

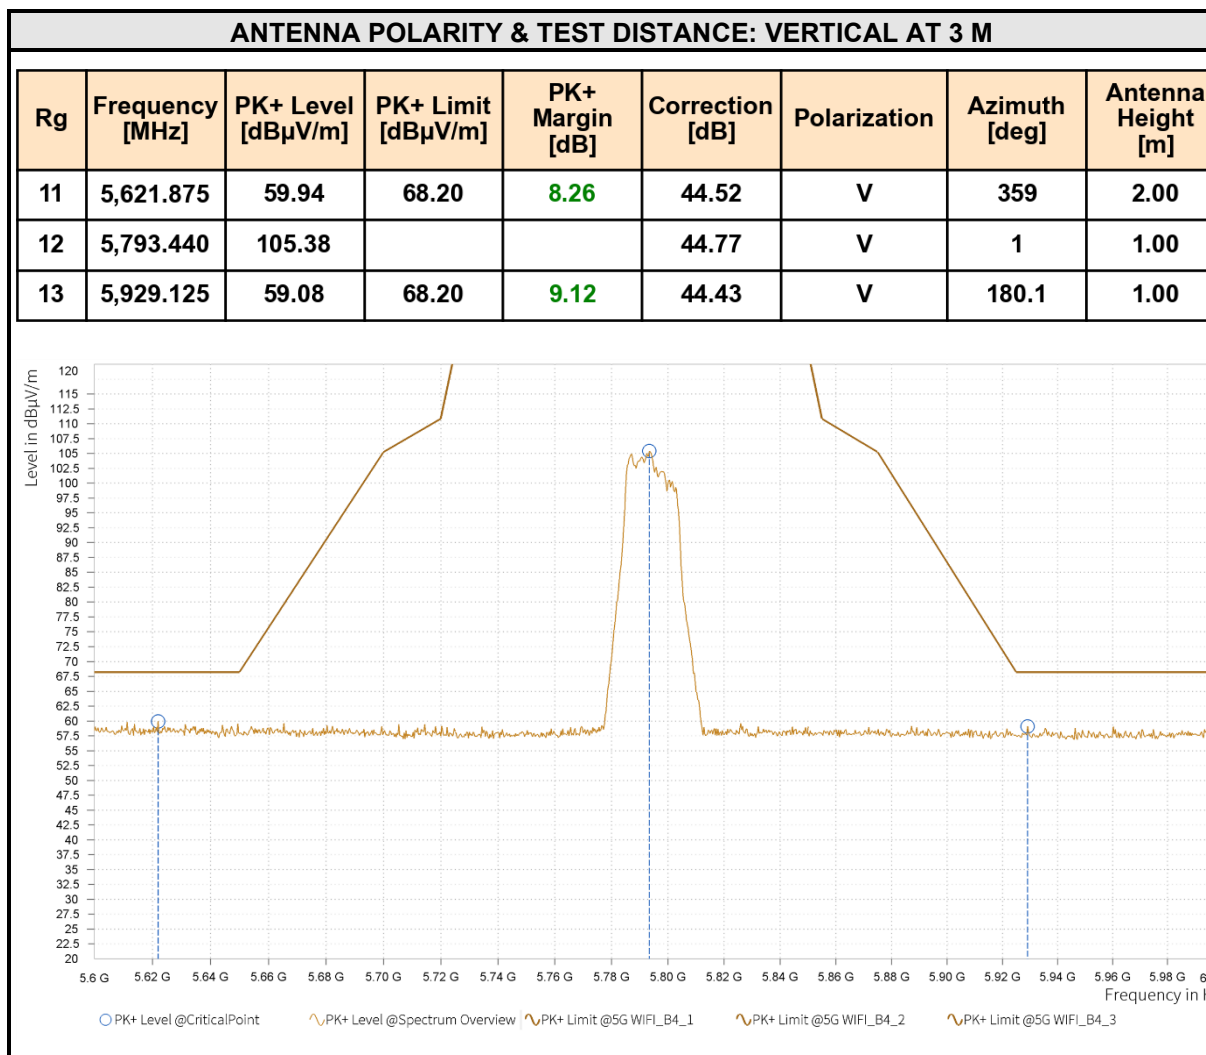

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5785MHz: Fundamental frequency.

RADIATED EMISSION
BELOW 1GHz WORST-CASE DATA

Band 4									
802.11AX (20MHz)_RU26									
CHANNEL		TX Channel 157			DETECTOR FUNCTION		Quasi-Peak (QP)		
FREQUENCY RANGE		30MHz ~ 1GHz							
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	35.626	20.51	40.00	19.49	-12.49	H	321.9	1.00	120.000
1	64.629	20.29	40.00	19.71	-12.71	H	158.2	1.00	120.000
1	99.743	24.04	43.50	19.46	-12.22	H	158.2	1.00	120.000
1	169.292	24.36	43.50	19.14	-14.02	H	158.2	1.00	120.000
1	424.839	18.15	46.00	27.85	-4.23	H	4.8	1.00	120.000
1	915.319	25.12	46.00	20.88	2.56	H	321.9	1.00	120.000

REMARKS:


- Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
- Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- The other emission levels were very low against the limit.
- Margin value = Limit value- Emission level.

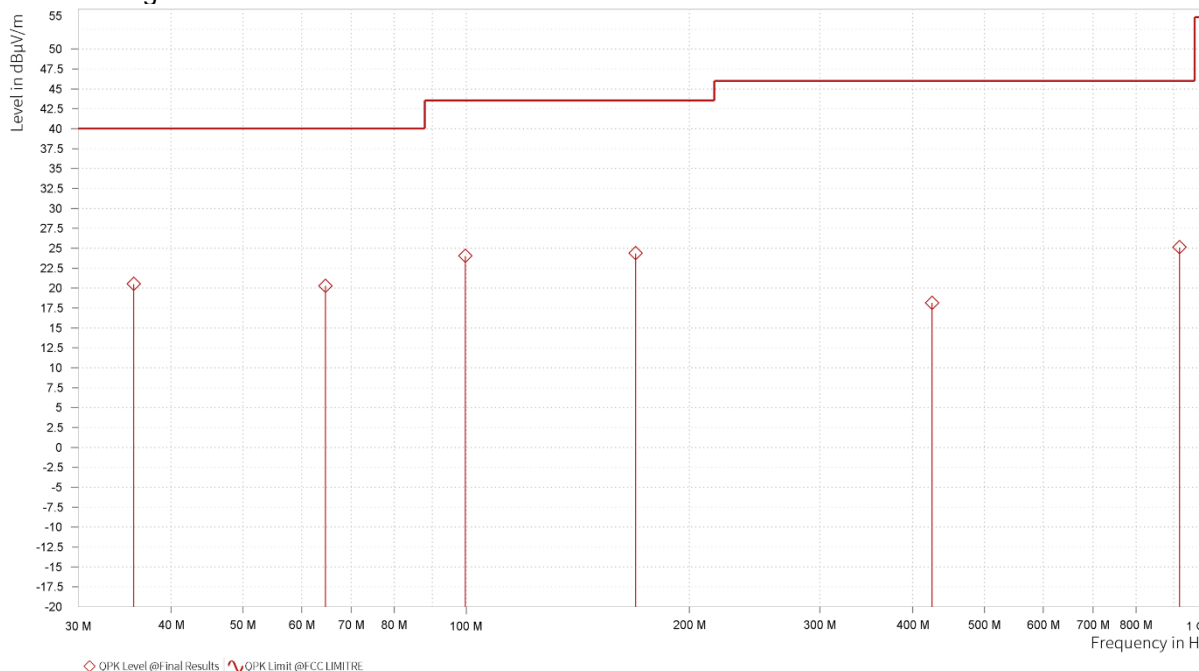

CHANNEL		Channel 157			DETECTOR FUNCTION		Quasi-Peak (QP)		
FREQUENCY RANGE		30MHz ~ 1GHz							
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	35.869	26.20	40.00	13.80	-12.41	V	325.4	1.00	120.000
1	52.989	25.49	40.00	14.51	-10.30	V	159.4	1.00	120.000
1	74.038	35.22	40.00	4.78	-15.72	V	159.4	1.00	120.000
1	170.214	25.01	43.50	18.49	-13.95	V	4.8	1.00	120.000
1	418.922	18.21	46.00	27.79	-3.79	V	359	1.00	120.000
1	739.798	24.00	46.00	22.00	-0.41	V	359	1.00	120.000

REMARKS:

1. Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Limit value- Emission level.

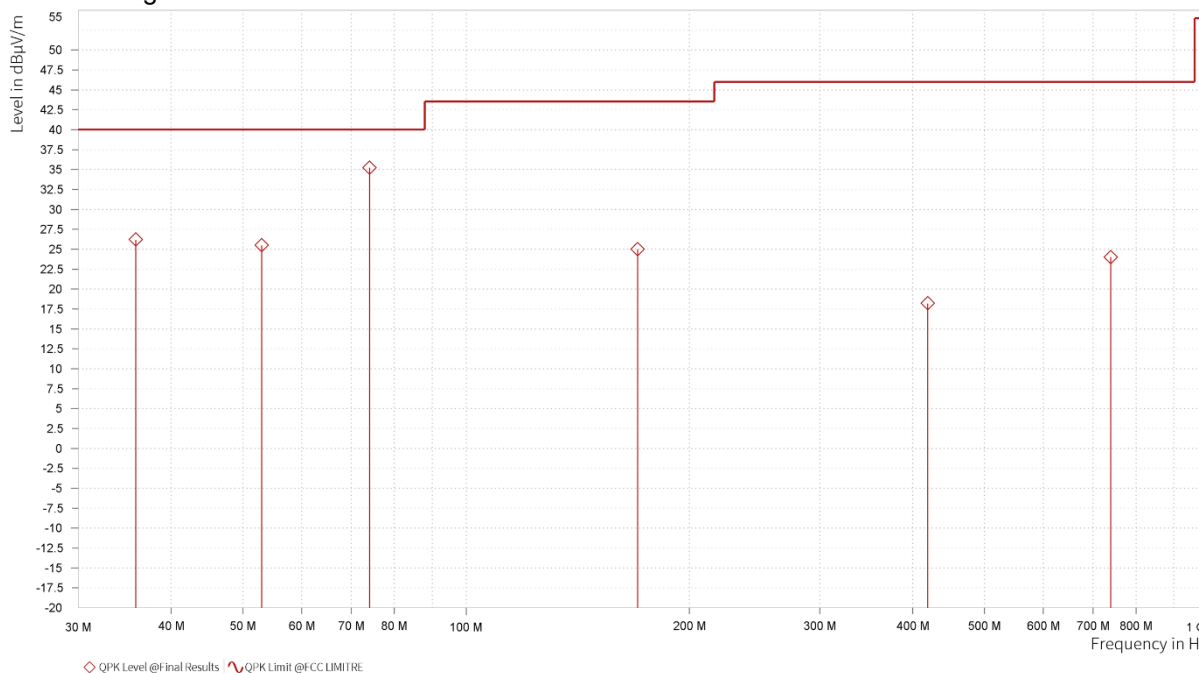

Test Report No.: RF260714B015

Band 3									
802.11BE (20MHz)_MRU26+106									
CHANNEL		TX Channel 140		DETECTOR FUNCTION		Quasi-Peak (QP)			
FREQUENCY RANGE		30MHz ~ 1GHz							
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	46.927	21.43	40.00	18.57	-10.21	H	321.9	1.00	120.000
1	104.011	15.93	43.50	27.57	-12.03	H	359	1.00	120.000
1	197.665	13.88	43.50	29.62	-11.14	H	321.9	1.00	120.000
1	356.745	16.61	46.00	29.39	-5.44	H	159.4	1.00	120.000
1	487.695	19.49	46.00	26.51	-3.93	H	1	1.00	120.000
1	774.815	23.37	46.00	22.63	-0.10	H	359	1.00	120.000

REMARKS:

5. Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).

6. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

7. The other emission levels were very low against the limit.

8. Margin value = Limit value- Emission level.


Level in dBμV/m

</

CHANNEL		Channel 140			DETECTOR FUNCTION		Quasi-Peak (QP)		
FREQUENCY RANGE		30MHz ~ 1GHz							
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	32.716	24.77	40.00	15.23	-13.09	V	359	1.00	120.000
1	94.457	20.00	43.50	23.50	-13.17	V	359	1.00	120.000
1	199.944	17.42	43.50	26.08	-11.12	V	160.6	1.00	120.000
1	338.751	16.43	46.00	29.57	-5.82	V	359	1.00	120.000
1	484.979	19.37	46.00	26.63	-3.96	V	326.7	1.00	120.000
1	741.447	24.04	46.00	21.96	-0.36	V	4.8	1.00	120.000

REMARKS:


- Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
- Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- The other emission levels were very low against the limit.
- Margin value = Limit value- Emission level.

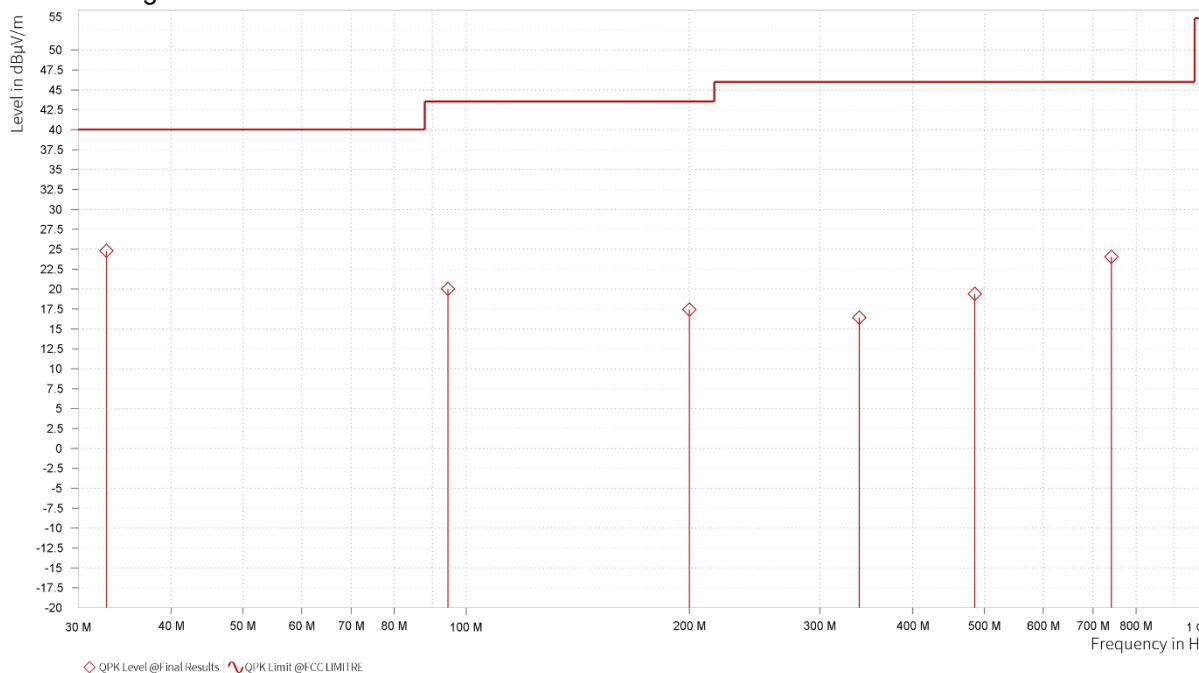


ABOVE 1GHz WORST-CASE DATA

Note: 1. For higher frequency, the emission is too low to be detected.

2. For radiated emission testing, all supported channels, bandwidths and modes have been tested, the report only shown the worst-case data of each sub-band.

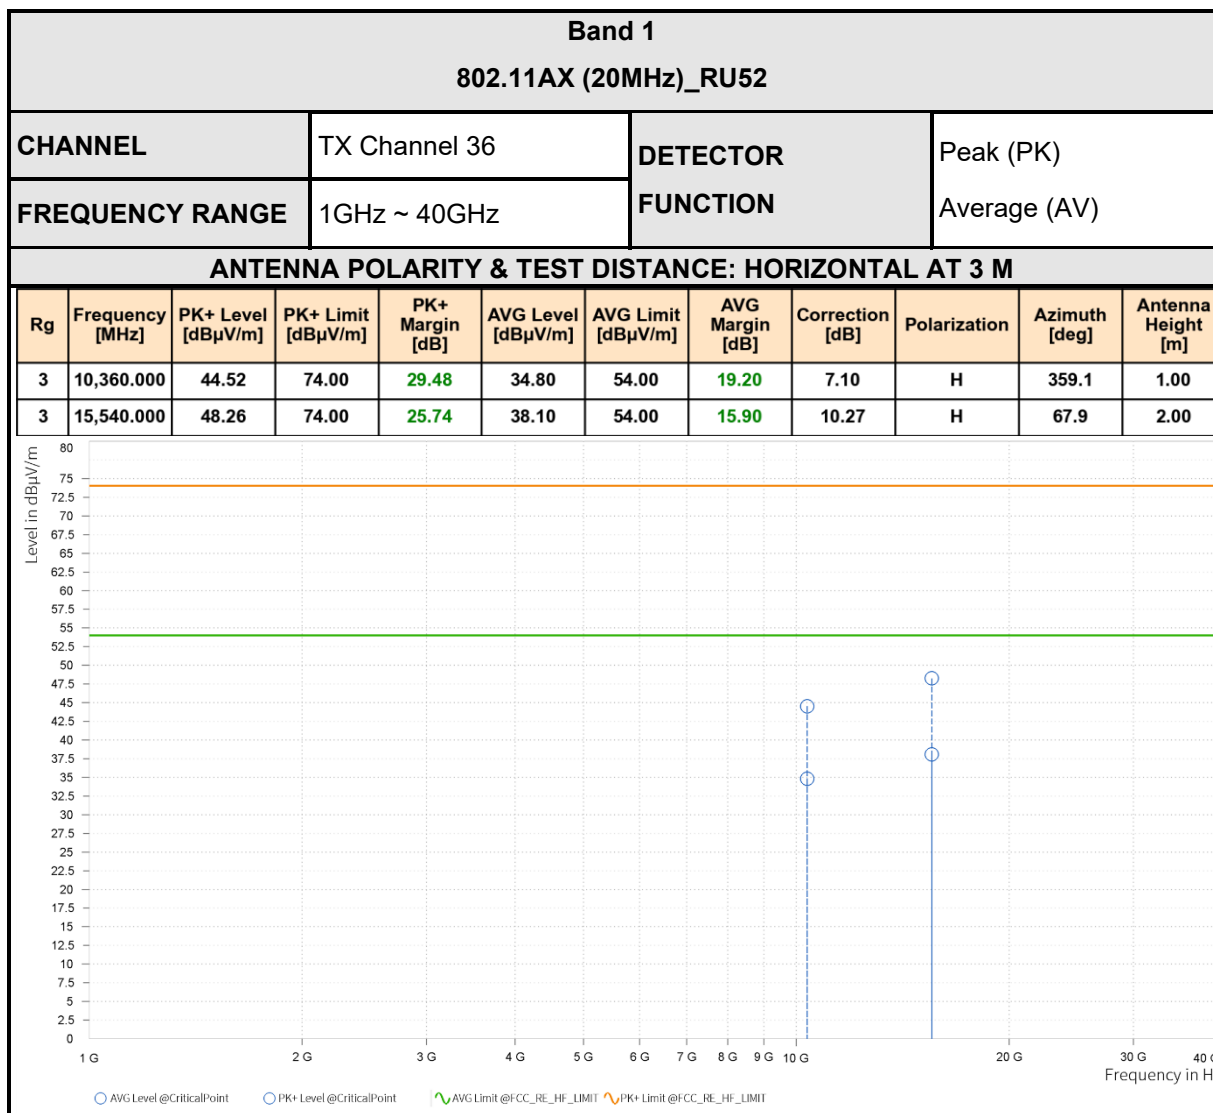

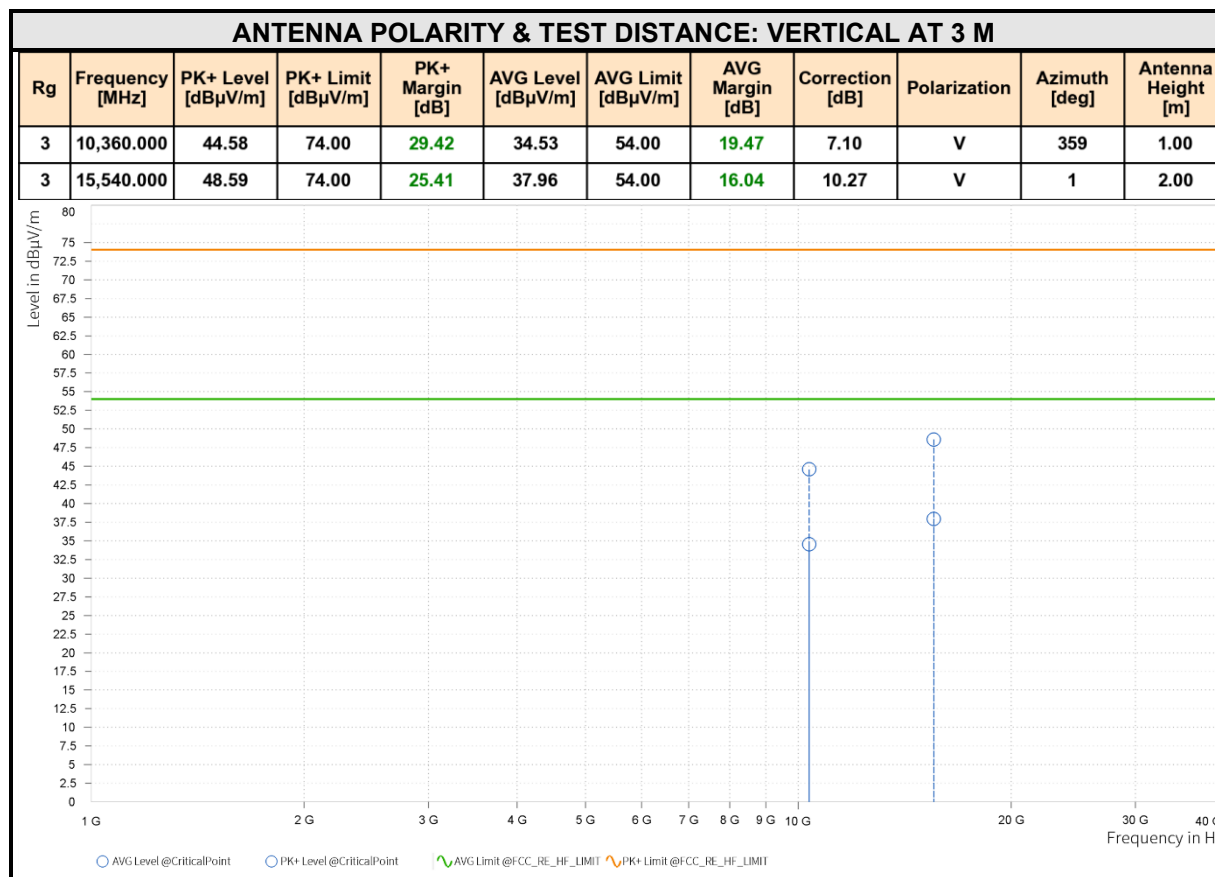

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5210MHz: Fundamental frequency.