





Reference No.: W7L-231218W001RF04



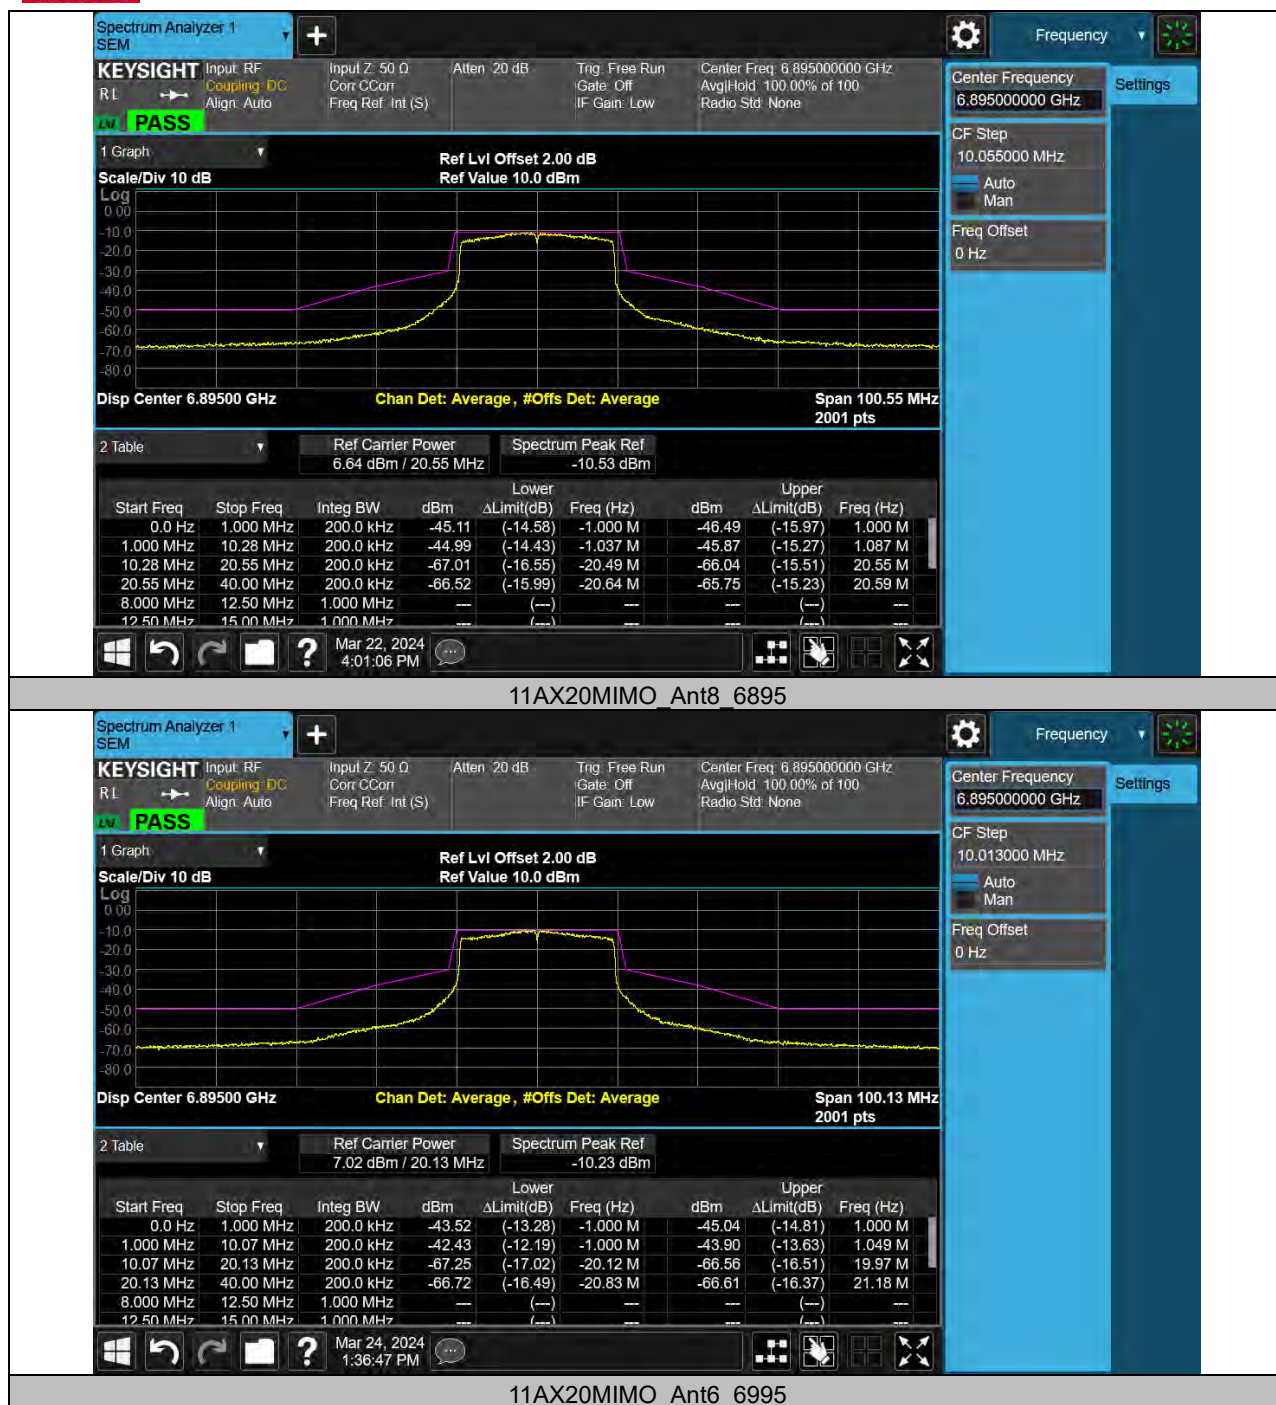


Reference No.: W7L-231218W001RF04

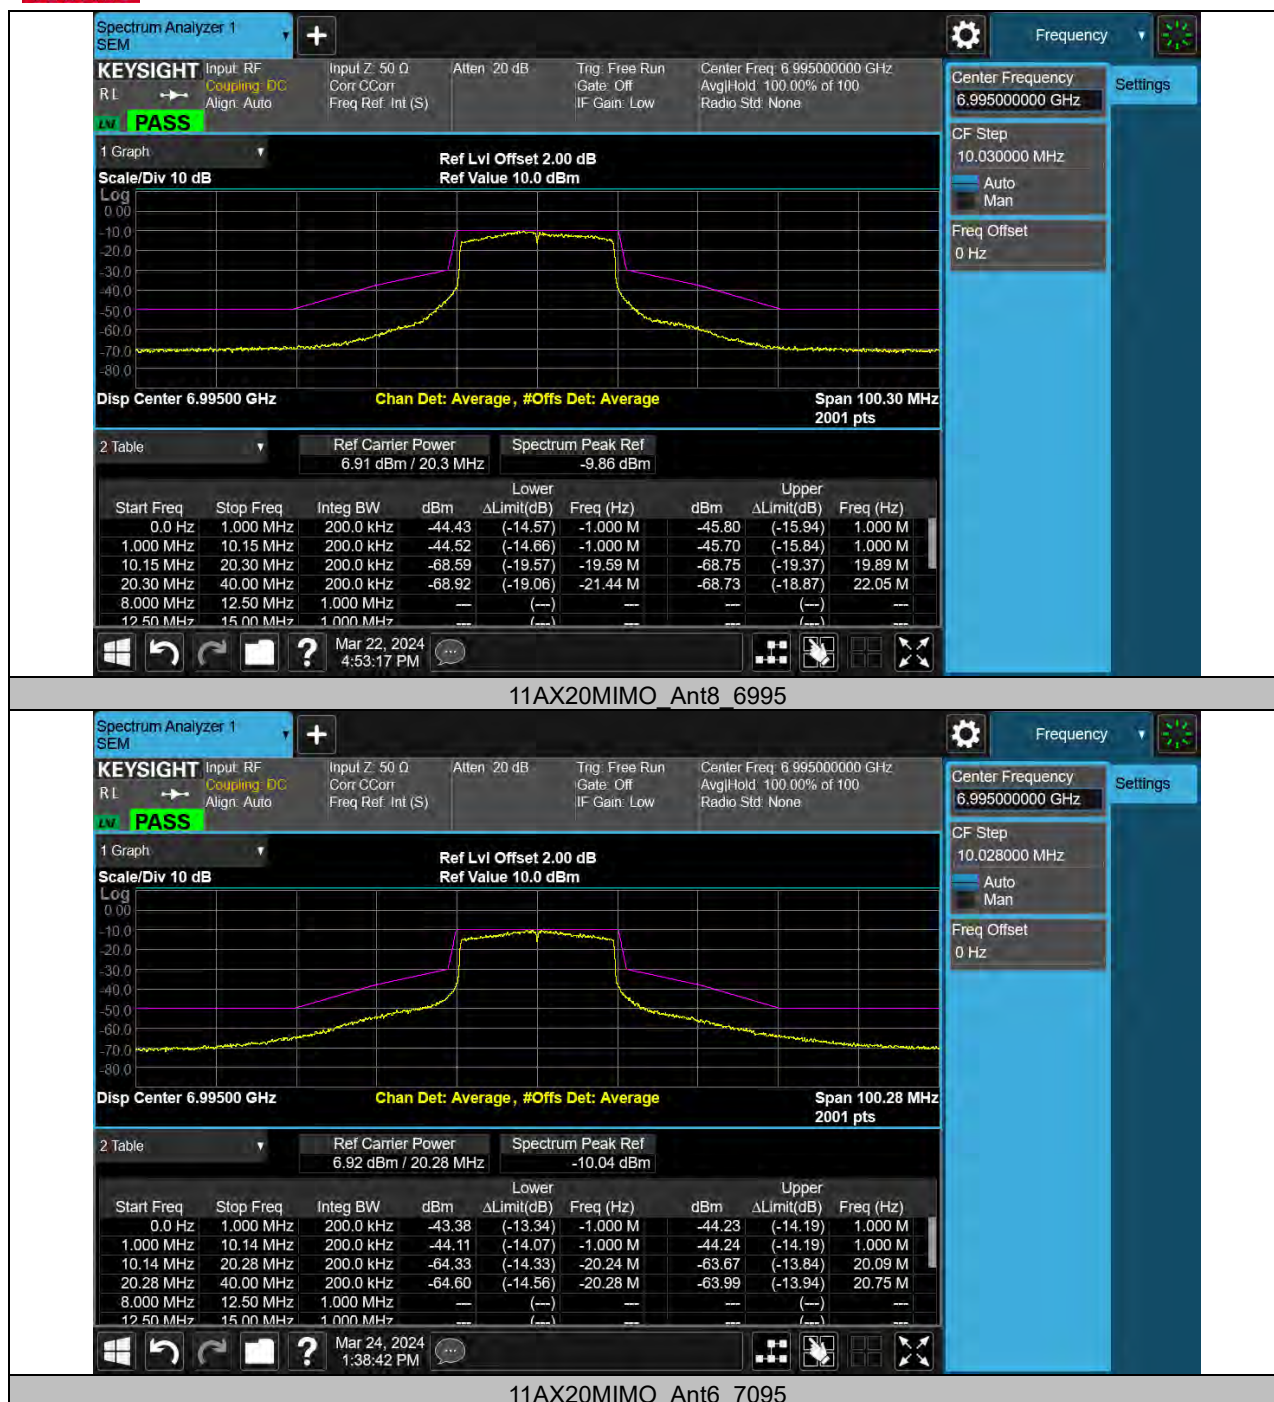




Reference No.: W7L-231218W001RF04

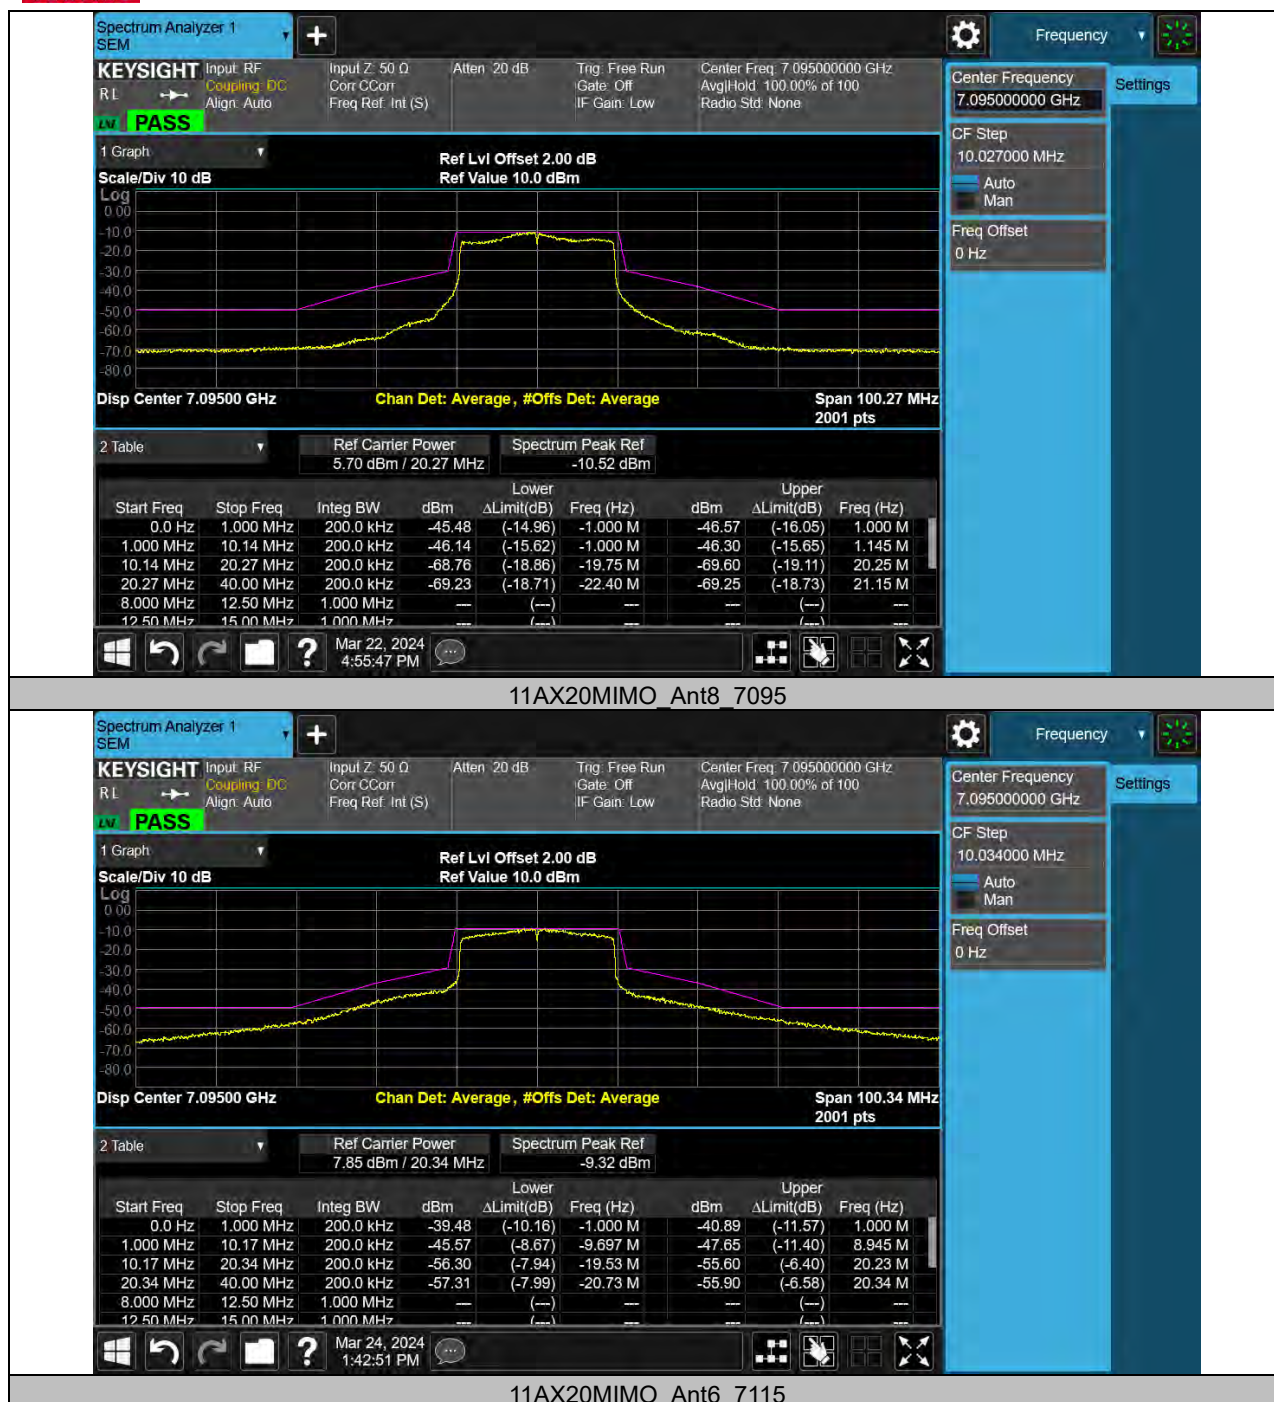




Reference No.: W7L-231218W001RF04

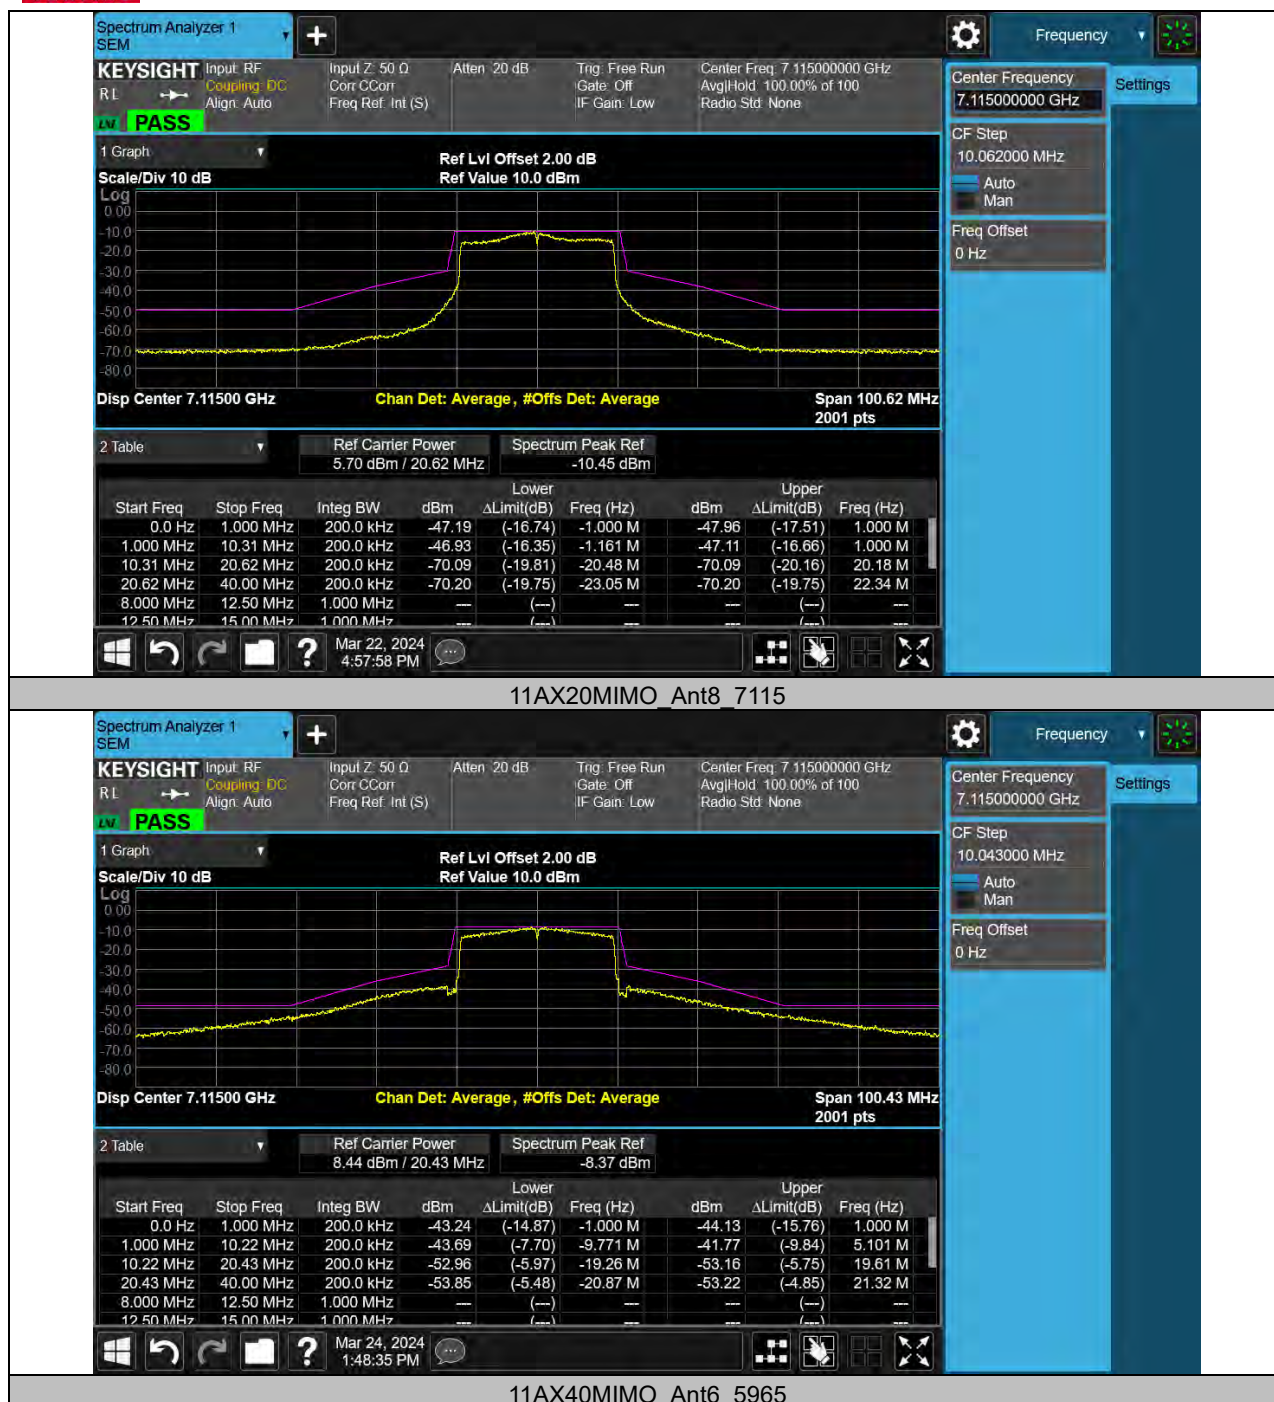




Reference No.: W7L-231218W001RF04

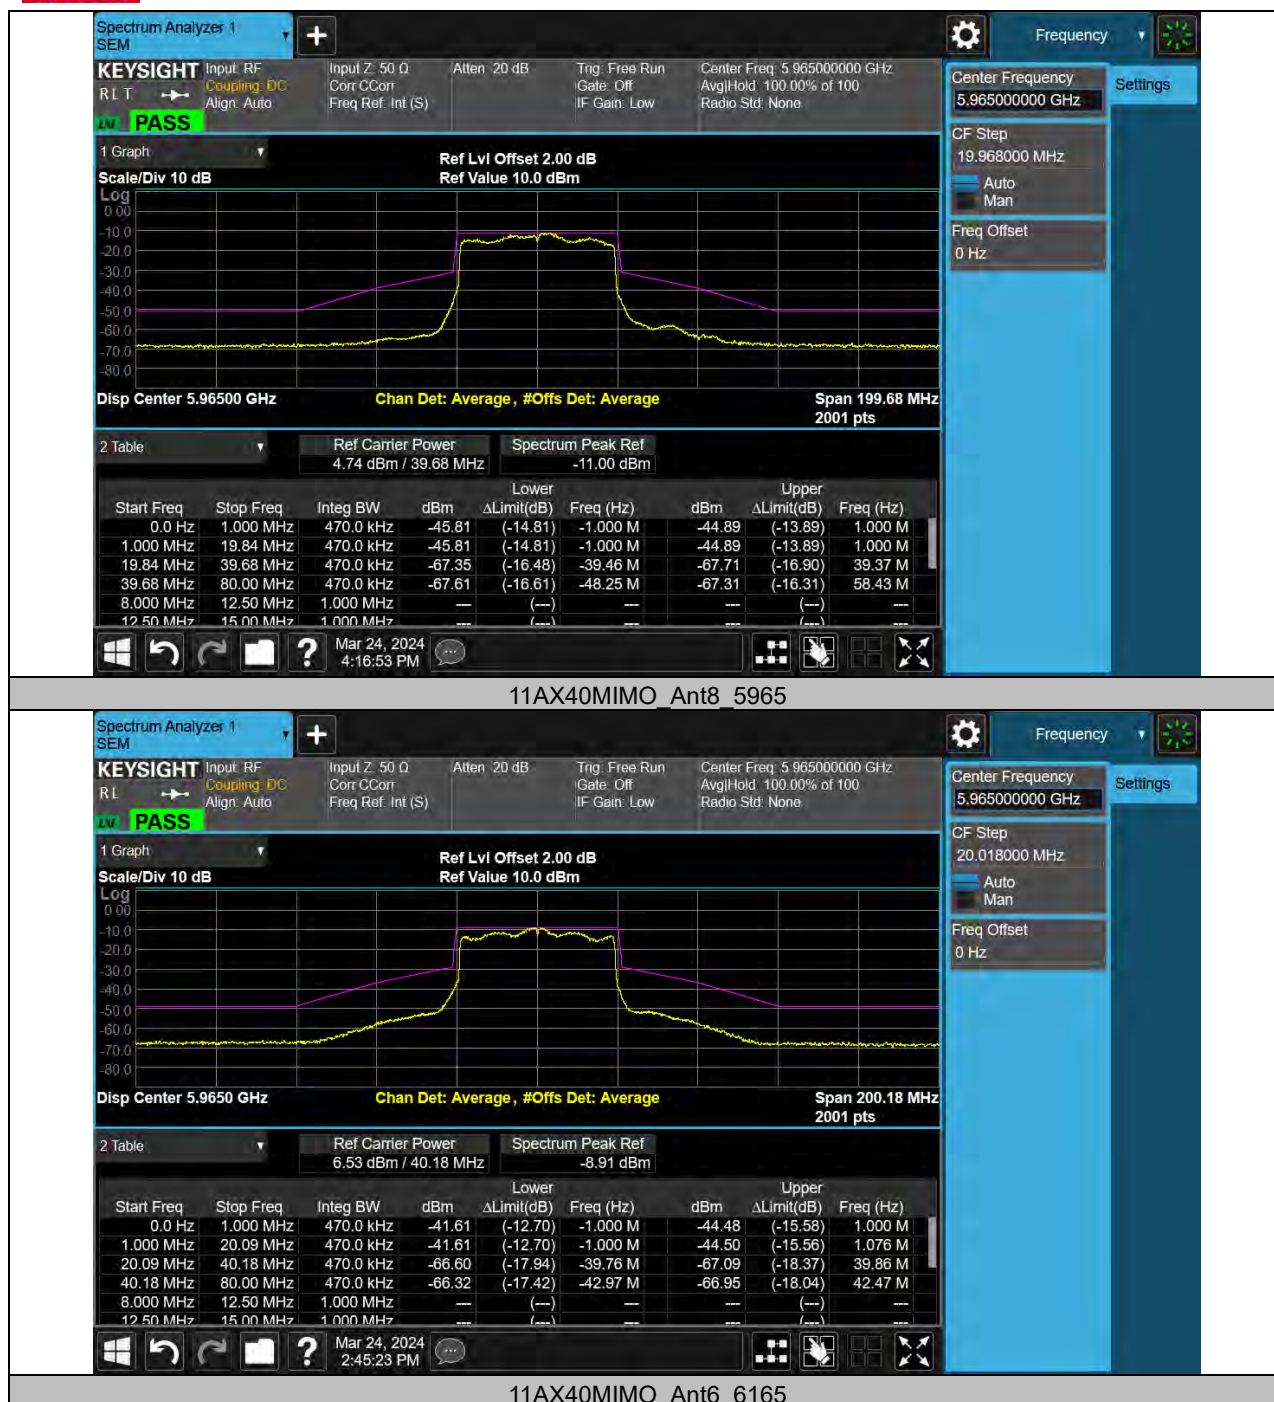




Reference No.: W7L-231218W001RF04

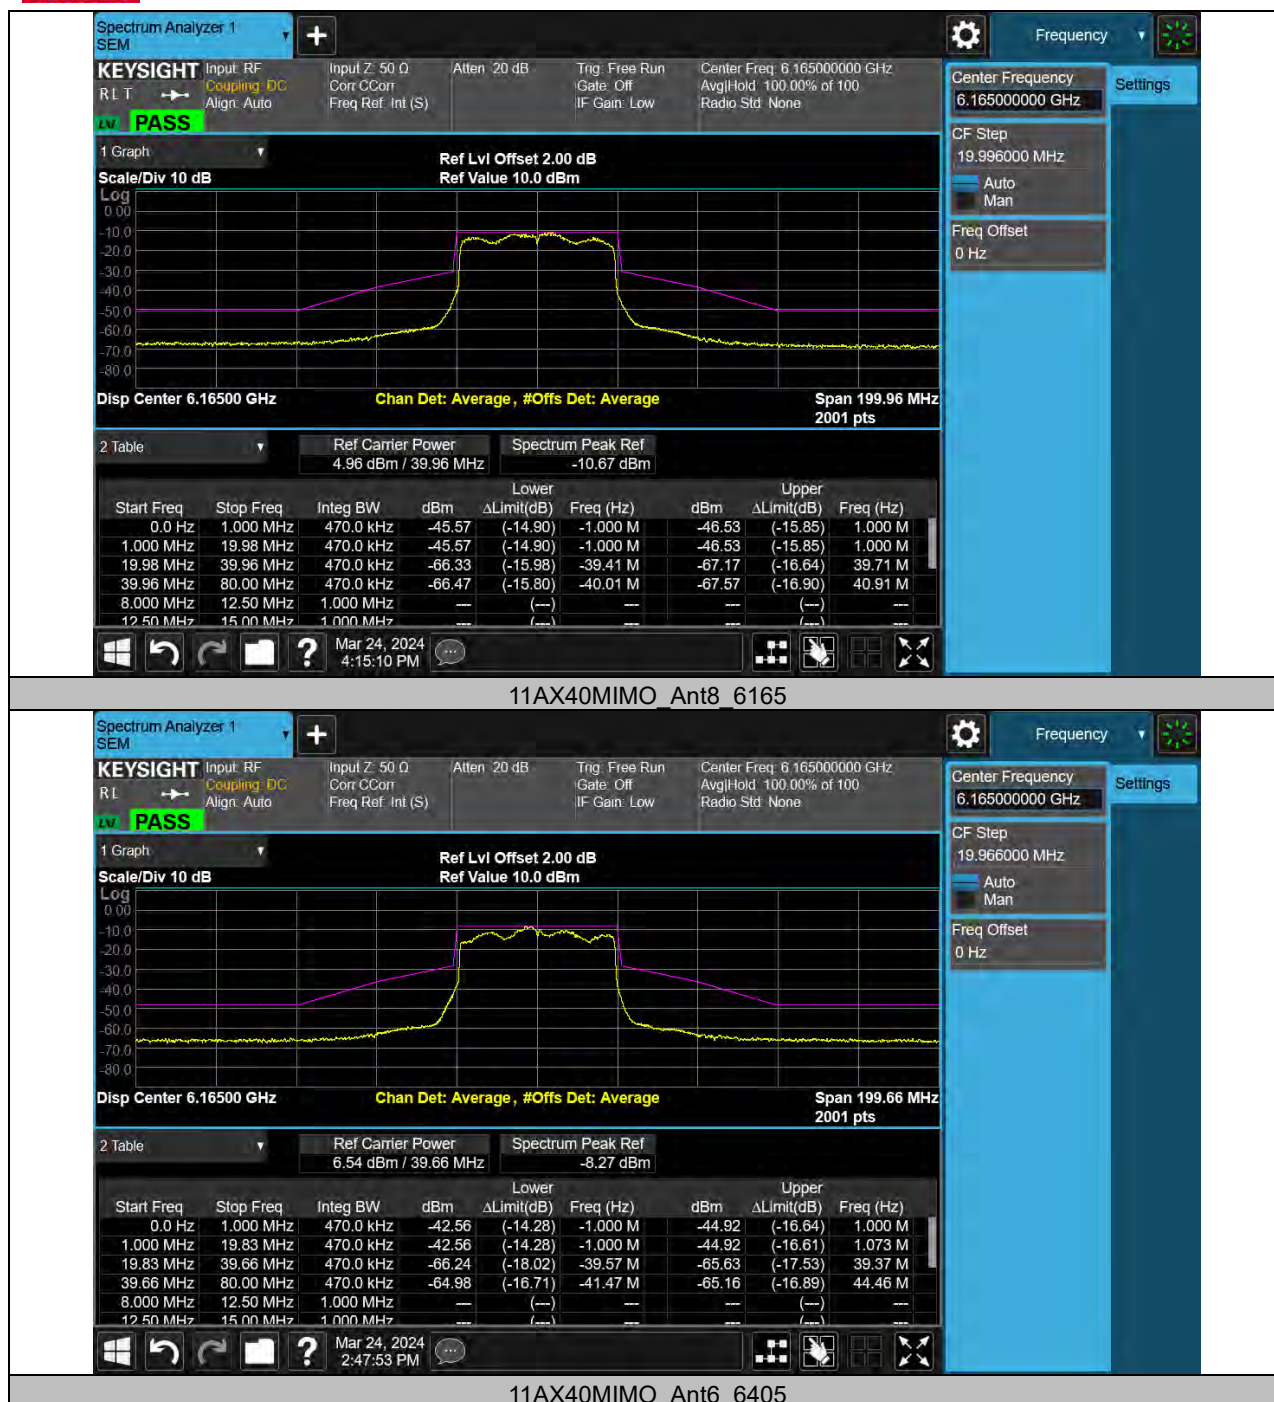



Reference No.: W7L-231218W001RF04

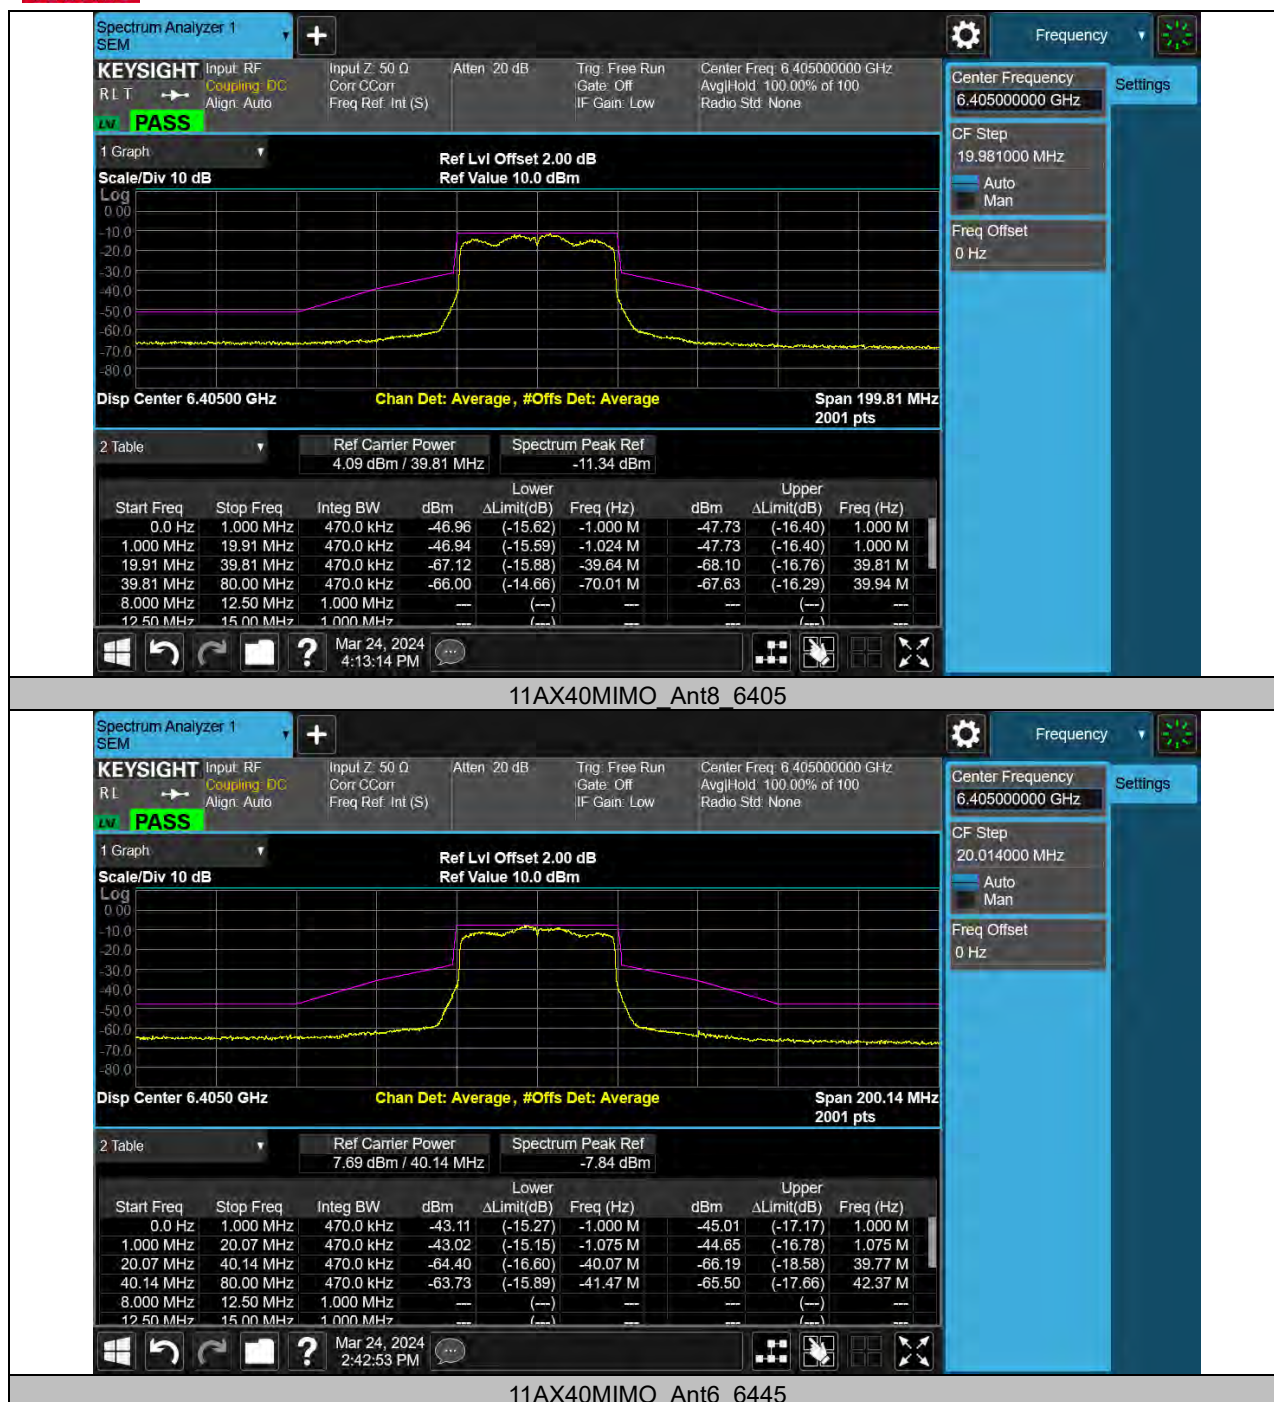



Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





BUREAU
VERITAS

Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04







Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04





Reference No.: W7L-231218W001RF04



RU MODE

MAXIMUM CONDUCTED OUTPUT POWER TEST RESULT

BV Power Table U-NII-5										
Test Mode	TX Mod.	RU Config.	Freq. (MHz)	Ant.	MAXimum Conducted Power (dBm)	Conducted Power Limit (dBm)	EIRP (dBm)	EIRP Limited (dBm)	Verdict	Power Setting
11AX20	MIMO	26/0	5935	Ant6	-11.20	----	-11.75	≤24.00	Pass	-12
				Ant8	-10.67	----	-11.22	≤24.00	Pass	-12
				Total	-7.92	----	-8.47	≤24.00	Pass	-12
		26/0	5955	Ant6	-5.92	----	-6.47	≤24.00	Pass	-6.5
				Ant8	-5.76	----	-6.31	≤24.00	Pass	-6.5
				Total	-2.83	----	-3.38	≤24.00	Pass	-6.5
		26/4	6175	Ant6	-5.69	----	-6.24	≤24.00	Pass	0
				Ant8	-3.38	----	-3.93	≤24.00	Pass	0
				Total	-1.37	----	-1.92	≤24.00	Pass	0
		26/8	6415	Ant6	-8.25	----	-8.80	≤24.00	Pass	1
				Ant8	-3.04	----	-3.59	≤24.00	Pass	1
				Total	-1.90	----	-2.45	≤24.00	Pass	1
		52/37	5935	Ant6	-6.41	----	-6.96	≤24.00	Pass	-8
				Ant8	-7.48	----	-8.03	≤24.00	Pass	-8
				Total	-3.90	----	-4.45	≤24.00	Pass	-8
		52/37	5955	Ant6	3.15	----	2.60	≤24.00	Pass	2
				Ant8	1.96	----	1.41	≤24.00	Pass	2
				Total	5.61	----	5.06	≤24.00	Pass	2
		52/38	6175	Ant6	-5.92	----	-6.47	≤24.00	Pass	0.5
				Ant8	-2.29	----	-2.84	≤24.00	Pass	0.5
				Total	-0.73	----	-1.28	≤24.00	Pass	0.5
		52/40	6415	Ant6	-8.00	----	-8.55	≤24.00	Pass	2
				Ant8	0.18	----	-0.37	≤24.00	Pass	2
				Total	0.79	----	0.24	≤24.00	Pass	2
		106/53	5935	Ant6	-6.38	----	-6.93	≤24.00	Pass	-8
				Ant8	-7.69	----	-8.24	≤24.00	Pass	-8
				Total	-3.98	----	-4.53	≤24.00	Pass	-8
		106/53	5955	Ant6	-0.07	----	-0.62	≤24.00	Pass	0
				Ant8	0.01	----	-0.54	≤24.00	Pass	0
				Total	2.98	----	2.43	≤24.00	Pass	0
		106/53	6175	Ant6	-1.45	----	-2.00	≤24.00	Pass	4
				Ant8	0.40	----	-0.15	≤24.00	Pass	4
				Total	2.58	----	2.03	≤24.00	Pass	4

		106/54	6415	Ant6	-5.85	----	-6.40	≤24.00	Pass	4
				Ant8	0.11	----	-0.44	≤24.00	Pass	4
				Total	1.09	----	0.54	≤24.00	Pass	4
		FULL	5935	Ant6	-3.56	----	-4.11	≤24.00	Pass	-5
				Ant8	-3.82	----	-4.37	≤24.00	Pass	-5
				Total	-0.68	----	-1.23	≤24.00	Pass	-5
		FULL	5955	Ant6	2.08	----	1.53	≤24.00	Pass	2
				Ant8	2.42	----	1.87	≤24.00	Pass	2
				Total	5.26	----	4.71	≤24.00	Pass	2
		FULL	6175	Ant6	1.69	----	1.14	≤24.00	Pass	5
				Ant8	3.90	----	3.35	≤24.00	Pass	5
				Total	5.94	----	5.39	≤24.00	Pass	5
		FULL	6415	Ant6	0.07	----	-0.48	≤24.00	Pass	7.5
				Ant8	4.90	----	4.35	≤24.00	Pass	7.5
				Total	6.13	----	5.58	≤24.00	Pass	7.5
11AX40	MIMO	FULL	5965	Ant6	5.39	----	4.84	≤24.00	Pass	6
				Ant8	6.12	----	5.57	≤24.00	Pass	6
				Total	8.78	----	8.23	≤24.00	Pass	6
		FULL	6165	Ant6	5.18	----	4.63	≤24.00	Pass	8.5
				Ant8	6.87	----	6.32	≤24.00	Pass	8.5
				Total	9.12	----	8.57	≤24.00	Pass	8.5
		FULL	6405	Ant6	3.34	----	2.79	≤24.00	Pass	10
				Ant8	7.73	----	7.18	≤24.00	Pass	10
				Total	9.08	----	8.53	≤24.00	Pass	10
11AX80	MIMO	FULL	5985	Ant6	7.31	----	6.76	≤24.00	Pass	7
				Ant8	7.94	----	7.39	≤24.00	Pass	7
				Total	10.65	----	10.10	≤24.00	Pass	7
		FULL	6145	Ant6	6.81	----	6.26	≤24.00	Pass	9
				Ant8	8.18	----	7.63	≤24.00	Pass	9
				Total	10.56	----	10.01	≤24.00	Pass	9
		FULL	6385	Ant6	4.46	----	3.91	≤24.00	Pass	10
				Ant8	8.43	----	7.88	≤24.00	Pass	10
				Total	9.89	----	9.34	≤24.00	Pass	10
11AX160	MIMO	FULL	6025	Ant6	7.37	----	6.82	≤24.00	Pass	10.5
				Ant8	8.62	----	8.07	≤24.00	Pass	10.5
				Total	11.05	----	10.50	≤24.00	Pass	10.5
		FULL	6185	Ant6	7.07	----	6.52	≤24.00	Pass	10
				Ant8	8.58	----	8.03	≤24.00	Pass	10
				Total	10.90	----	10.35	≤24.00	Pass	10
		FULL	6345	Ant6	6.32	----	5.77	≤24.00	Pass	11
				Ant8	9.07	----	8.52	≤24.00	Pass	11
				Total	10.92	----	10.37	≤24.00	Pass	11

Note:1. The MAXimum Conducted Power with duty cycle factor.

2. The EIRP = MAXimum Conducted Power + Ant Gain.

BV Power Table U-NII-6

Test Mode	TX Mod.	RU Config.	Freq. (MHz)	Ant.	MAXimum Conducted Power (dBm)	Conducted Power Limit (dBm)	EIRP (dBm)	EIRP Limited (dBm)	Verdict	Power Setting
11AX20	MIMO	26/0	6435	Ant6	-7.74	----	-9.18	≤24.00	Pass	1
				Ant8	-2.57	----	-4.01	≤24.00	Pass	1
				Total	-1.42	----	-2.86	≤24.00	Pass	1
		26/4	6475	Ant6	-10.28	----	-11.72	≤24.00	Pass	2
				Ant8	-2.41	----	-3.85	≤24.00	Pass	2
				Total	-1.75	----	-3.19	≤24.00	Pass	2
		26/8	6515	Ant6	-10.48	----	-11.92	≤24.00	Pass	2
				Ant8	-3.22	----	-4.66	≤24.00	Pass	2
				Total	-2.47	----	-3.91	≤24.00	Pass	2
		52/37	6435	Ant6	-1.75	----	-3.19	≤24.00	Pass	5
				Ant8	2.17	----	0.73	≤24.00	Pass	5
				Total	3.65	----	2.21	≤24.00	Pass	5
		52/38	6475	Ant6	-2.53	----	-3.97	≤24.00	Pass	5
				Ant8	1.96	----	0.52	≤24.00	Pass	5
				Total	3.28	----	1.84	≤24.00	Pass	5
		52/40	6515	Ant6	-3.17	----	-4.61	≤24.00	Pass	5
				Ant8	1.02	----	-0.42	≤24.00	Pass	5
				Total	2.42	----	0.98	≤24.00	Pass	5
		106/53	6435	Ant6	0.35	----	-1.09	≤24.00	Pass	7
				Ant8	4.65	----	3.21	≤24.00	Pass	7
				Total	6.02	----	4.58	≤24.00	Pass	7
		106/53	6475	Ant6	-0.15	----	-1.59	≤24.00	Pass	7
				Ant8	3.76	----	2.32	≤24.00	Pass	7
				Total	5.24	----	3.80	≤24.00	Pass	7
		106/54	6515	Ant6	-0.45	----	-1.89	≤24.00	Pass	7
				Ant8	3.06	----	1.62	≤24.00	Pass	7
				Total	4.66	----	3.22	≤24.00	Pass	7
		FULL	6435	Ant6	1.90	----	0.46	≤24.00	Pass	10
				Ant8	6.65	----	5.21	≤24.00	Pass	10
				Total	7.90	----	6.46	≤24.00	Pass	10
		FULL	6475	Ant6	2.12	----	0.68	≤24.00	Pass	10
				Ant8	5.36	----	3.92	≤24.00	Pass	10
				Total	7.05	----	5.61	≤24.00	Pass	10
		FULL	6515	Ant6	2.59	----	1.15	≤24.00	Pass	11
				Ant8	7.23	----	5.79	≤24.00	Pass	11
				Total	8.51	----	7.07	≤24.00	Pass	11
11AX40	MIMO	FULL	6445	Ant6	5.24	----	3.80	≤24.00	Pass	13.5
				Ant8	9.98	----	8.54	≤24.00	Pass	13.5
				Total	11.24	----	9.80	≤24.00	Pass	13.5
		FULL	6485	Ant6	5.00	----	3.56	≤24.00	Pass	13.5
				Ant8	9.65	----	8.21	≤24.00	Pass	13.5
				Total	10.93	----	9.49	≤24.00	Pass	13.5



Reference No.: W7L-231218W001RF04

		FULL	6525	Ant6	5.28	----	3.84	≤24.00	Pass	13.5
				Ant8	9.37	----	7.93	≤24.00	Pass	13.5
				Total	10.80	----	9.36	≤24.00	Pass	13.5
11AX80	MIMO	FULL	6465	Ant6	5.06	----	3.62	≤24.00	Pass	12.5
				Ant8	9.35	----	7.91	≤24.00	Pass	12.5
				Total	10.72	----	9.28	≤24.00	Pass	12.5
		FULL	6545	Ant6	5.99	----	4.55	≤24.00	Pass	13
				Ant8	9.37	----	7.93	≤24.00	Pass	13
				Total	11.01	----	9.57	≤24.00	Pass	13
11AX160	MIMO	FULL	6505	Ant6	6.32	----	4.88	≤24.00	Pass	13
				Ant8	9.07	----	7.63	≤24.00	Pass	13
				Total	11.81	----	10.37	≤24.00	Pass	13

Note:1.The MAXimum Conducted Power with duty cycle factor.

2. The EIRP = MAXimum Conducted Power + Ant Gain .

BV Power Table U-NII-7										
Test Mode	TX Mod.	RU Config.	Freq. (MHz)	Ant.	MAXimum Conducted Power (dBm)	Conducted Power Limit (dBm)	EIRP (dBm)	EIRP Limited (dBm)	Verdict	Power Setting
11AX20	MIMO	26/0	6535	Ant6	-8.26	≤24.00	-10.03	≤24.00	Pass	4
				Ant8	-2.12	≤24.00	-3.89	≤24.00	Pass	4
				Total	-1.17	≤24.00	-2.94	≤24.00	Pass	4
		26/4	6695	Ant6	-1.48	≤24.00	-3.25	≤24.00	Pass	8
				Ant8	1.30	≤24.00	-0.47	≤24.00	Pass	8
				Total	3.14	≤24.00	1.37	≤24.00	Pass	8
		26/8	6855	Ant6	0.27	≤24.00	-1.50	≤24.00	Pass	6
				Ant8	-0.53	≤24.00	-2.30	≤24.00	Pass	6
				Total	2.90	≤24.00	1.13	≤24.00	Pass	6
		52/37	6535	Ant6	-0.53	≤24.00	-2.30	≤24.00	Pass	7
				Ant8	2.45	≤24.00	0.68	≤24.00	Pass	7
				Total	4.22	≤24.00	2.45	≤24.00	Pass	7
		52/38	6695	Ant6	0.85	≤24.00	-0.92	≤24.00	Pass	9
				Ant8	3.18	≤24.00	1.41	≤24.00	Pass	9
				Total	5.18	≤24.00	3.41	≤24.00	Pass	9
		52/40	6855	Ant6	3.25	≤24.00	1.48	≤24.00	Pass	9
				Ant8	2.35	≤24.00	0.58	≤24.00	Pass	9
				Total	5.83	≤24.00	4.06	≤24.00	Pass	9
		106/53	6535	Ant6	-0.45	≤24.00	-2.22	≤24.00	Pass	9
				Ant8	3.06	≤24.00	1.29	≤24.00	Pass	9
				Total	4.99	≤24.00	3.22	≤24.00	Pass	9
		106/53	6695	Ant6	1.14	≤24.00	-0.63	≤24.00	Pass	10.5
				Ant8	4.55	≤24.00	2.78	≤24.00	Pass	10.5
				Total	6.18	≤24.00	4.41	≤24.00	Pass	10.5
		106/54	6855	Ant6	2.77	≤24.00	1.00	≤24.00	Pass	10
				Ant8	4.95	≤24.00	3.18	≤24.00	Pass	10