



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822

Tel: +82-31-444-7270 Fax: +82-31-444-7271

<http://www.ltalab.com>

Dates of Tests: March 09 ~ May 06, 2026

Test Site : LTA CO., LTD.

RF TEST REPORT

FCC ID

VSODX-4100

APPLICANT

Yeonhwa M Tech Co.,Ltd

Device Category	:	Private Land Mobile Radio Service
Manufacturing Description	:	VHF Transceiver
Manufacturer	:	Yeonhwa M Tech Co.,Ltd
Trade name	:	X Radio
Model name	:	DX-4100
Variant Model	:	MDP-4116, MDP-4124
Serial number	:	Identical prototype
FCC Rule Part(s)	:	§2, §90
Frequency Range	:	136 ~ 174 MHz
RF Output Power	:	1 W ~ 5 W
Data of issue	:	May 06, 2026

This test report is issued under the authority of:

The test was supervised by:

Eun-Hwan Jung, Manager

Jae-Humm Yeon, Test Engineer

TABLE OF CONTENTS

1. GENERAL INFORMATION ----- 3

2. INFORMATION’S ABOUT TEST ITEM ----- 4

3. TEST REPORT ----- 5

 3.1 SUMMARY OF TESTS ----- 5

 3.2 TEST RESULTS ----- 6

 3.2.1 RF EXPOSURE ----- 6

 3.2.2 RF OUTPUT POWER ----- 7

 3.2.3 MODULATION CHARACTERISTIC----- 8

 3.2.4 OCCUPIED BANDWIDTH & EMISSION MASK ----- 12

 3.2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS ----- 25

 3.2.6 RADIATED SPURIOUS EMISSIONS ----- 39

 3.2.7 FREQUENCY STABILITY ----- 41

 3.2.8 TRANSIENT FREQUENCY BEHAVIOR ----- 43

APPENDIX

 APPENDIX TEST EQUIPMENT USED FOR TESTS ----- 45

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competent of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2027-03-29	FCC CAB
VCCI	JAPAN	C-4948,	2026-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2026-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2026-10-15	VCCI registration
VCCI	JAPAN	G-847	2027-12-13	VCCI registration
IC	CANADA	5799A-1	2026-08-05	IC filing

2. Information about test item

2-1 Client & Manufacturer

Company name : YEONHWA M TECH CO.,LTD
 Address : 36, Jeonpa-ro 44beon-gil Manan-gu, Anyang-si, Gyeonggi-do, Korea
 TEL / FAX : +82-31-444-7270 / +82-31-444-7271

2-2 Equipment Under Test (EUT)

Trade name : X Radio
 Model name : DX-4100
 Date of receipt : March 09, 2026
 EUT condition : Identical prototype
 Frequency Range : 136 ~ 174 MHz
 RF output power : 1 W ~ 5 W
 Channel Separation : 12.5 kHz
 Emission Designators : 11K0F3E, 7K60FXD, 7K60FXE
 Power Source : DC 7.4 V
 Firmware version : V1.0

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	151	162.5	174

The time division multiple access (TDMA) mode of operation provides two voice paths in a 12.5 kHz channel bandwidth and a data rate of 9600 bits per second in a channel bandwidth of 12.5 kHz. This is equivalent to one voice path per 6.25 kHz of channel bandwidth and 4800 bits per second or greater in a 6.25 kHz channel bandwidth. The SLR 5700 conforms to the spectrum efficiency requirements of FCC rule § 90.203 (j) (5).

3. Test Report

3.1 Summary of tests

FCC Rules	Description of Test	Results
§1.1307(b); §2.1093	RF Exposure	C
§2.1046; §90.205	RF Output Power	C
§2.1047; §90.207, §90.242	Modulation Characteristic	C
§2.1049; §90.209; §90.210	Occupied Bandwidth & Emission Mask	C
§2.1051; §90.210	Spurious Emission at Antenna Terminal	C
§2.1053; §90.210	Spurious Radiated Emissions	C
§2.1055; §90.213	Frequency Stability	C
§90.214	Transient Frequency Behavior	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification :

- FCC Part2, Part 90
- ANSI C63.26-2015

3.2 TEST RESULTS

3.2.1 RF OUTPUT POWER

Applicable Standard : FCC §2.1046 and §90.205

Test Procedure

- 1) The EUT transmitter connected to Power Meter using the 40 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

Test Result : **Compliance.**

Measurement Data: Transmitting

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	Output Power (dBm)	Output Power (W)	Result
Analog	12.5	151	1 W	29.76	0.95	Pass
		162.5	1 W	29.87	0.97	Pass
		174	1 W	29.93	0.98	Pass
		151	5 W	36.60	4.57	Pass
		162.5	5 W	36.72	4.70	Pass
		174	5 W	36.85	4.84	Pass
Digital	12.5	151	1 W	29.82	0.96	Pass
		162.5	1 W	29.91	0.98	Pass
		174	1 W	30.02	1.00	Pass
		151	5 W	36.56	4.53	Pass
		162.5	5 W	36.66	4.63	Pass
		174	5 W	36.73	4.71	Pass

Note : The rated 5 W for High Power and 1 W for Low power.

3.2.2 MODULATION CHARACTERISTIC

Applicable Standard : FCC§2.1047and §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure


Test Method : TIA -603-D 2.2.3

Test Result : Compliance.

Measurement Data: Analog Modulation


(Carrier Frequency : 162.5 MHz, Channel Separation : 12.5 kHz)

Audio Input Level [dB]	Frequency Deviation (kHz)			Limit [kHz]
	@ 300 Hz	@ 1 kHz	@ 3 kHz	
20.0	2.231	2.451	1.931	2.5
15.0	2.198	2.476	1.967	2.5
10.0	2.174	2.418	1.887	2.5
5.0	2.137	2.442	1.852	2.5
0.0	2.071	2.397	1.883	2.5
-5.0	1.688	2.241	1.864	2.5
-10.0	1.192	2.053	1.721	2.5
-15.0	0.592	1.684	1.167	2.5
-20.0	0.317	1.548	0.648	2.5

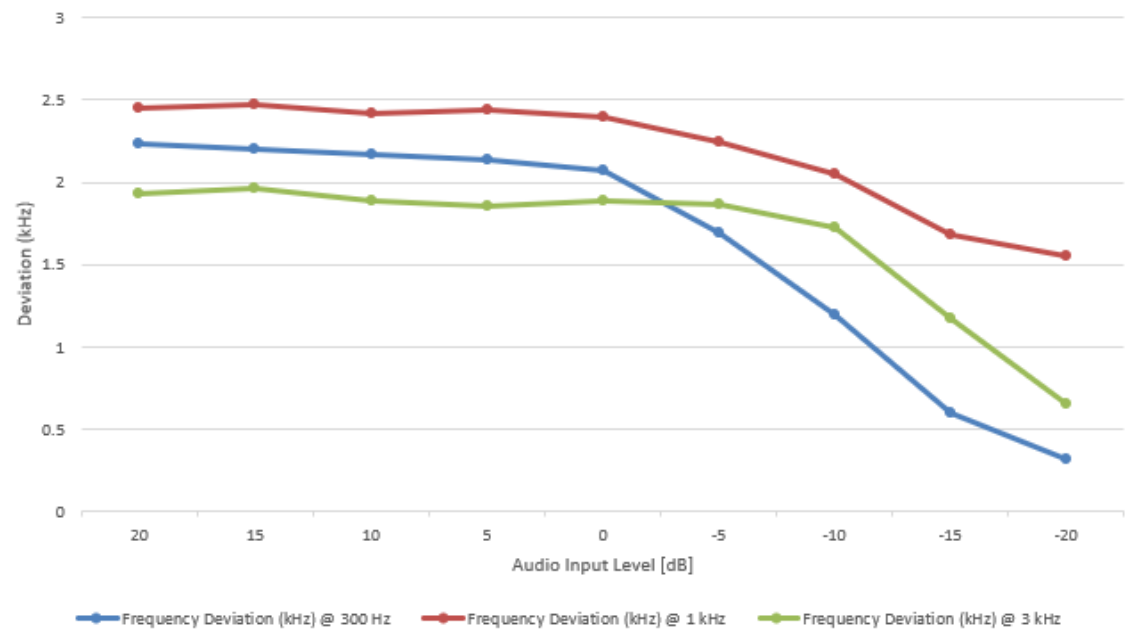


Measurement Data: Audio Frequency Response
(Carrier Frequency : 162.5 MHz, Channel Separation : 12.5 kHz)

Audio Frequency (Hz)	Response Attenuation (dB)
300	-10.18
400	-7.48
500	-5.61
600	-4.22
700	-2.96
800	-2.11
900	-1.09
1000	0.08
1200	1.86
1400	3.41
1600	4.57
1800	5.73
2000	6.82
2100	7.06
2200	7.39
2300	7.54
2400	7.31
2500	7.42
2600	6.94
2700	6.73
2800	5.87
2900	5.03
3000	4.02

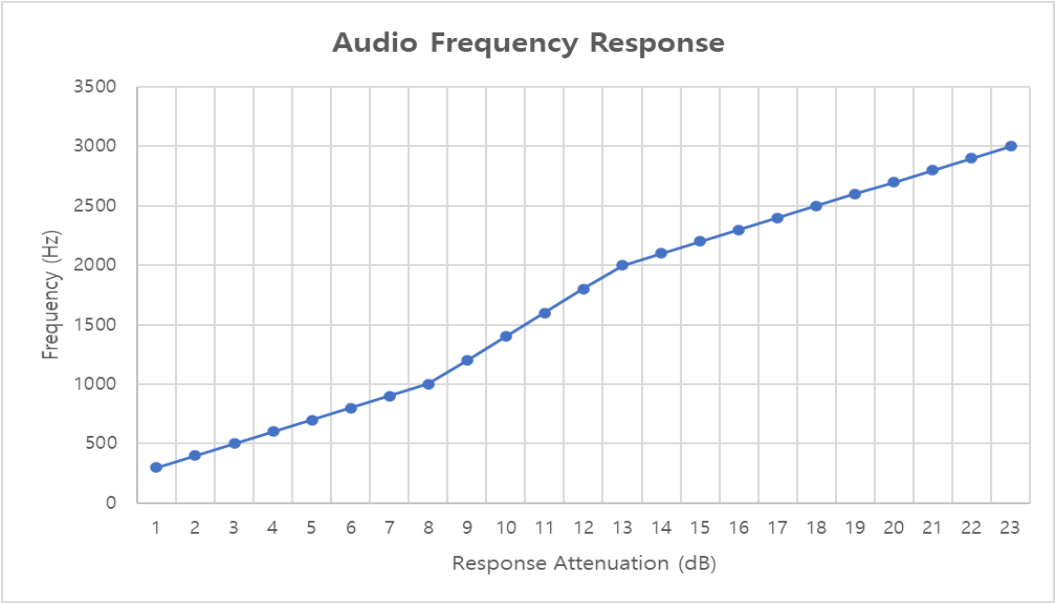

Measurement Data: Audio Frequency low pass filter response
(Carrier Frequency : 162.5 MHz, Channel Separation : 12.5 kHz)

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0	/
3.0	-41.8	0.0
4.0	-54.6	-12.5
5.0	-69.7	-22.2
6.0	-73.9	-30.1
7.0	-72.1	-36.8
8.0	-70.8	-42.6
9.0	-72.5	-47.7
10.0	-71.1	-52.3
12.0	-71.9	-60.2
14.0	-81.6	-66.9
16.0	-88.1	-72.7
18.0	-85.8	-77.8
20.0	-90.4	-82.4

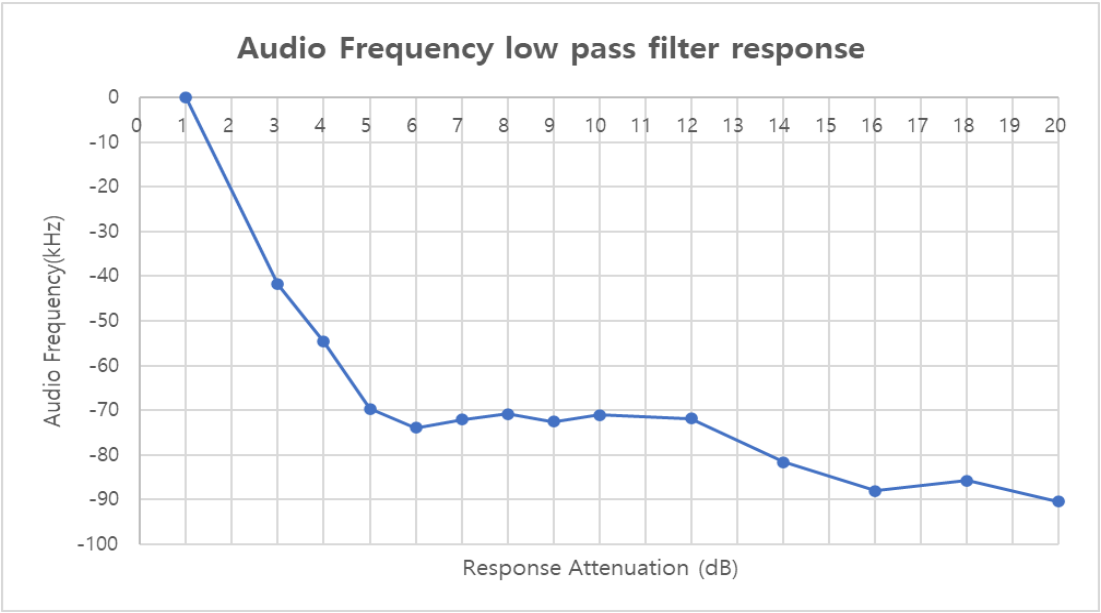

3.2.4 OCCUPIED BANDWIDTH EMISSION MASK

Applicable Standard : FCC §2.1049, §90.209 and §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 ($f_d - 2.88$ kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask E—6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3 \text{ kHz})$ or $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.
- 3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.

(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its

bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.


Test Result : **Compliance.**

Measurement Data: Transmitting


Modulation	Frequency (MHz)	Channel Space (kHz)	Power Level	99%Occupied Bandwidth (kHz)	26dB Emissions Bandwidth (kHz)	FCC Limit (kHz)
Analog	151	12.5	1 W	6.15	6.36	12.5
			5 W	6.15	6.36	12.5
Analog	162.5	12.5	1 W	6.15	6.44	12.5
			5 W	6.07	6.36	12.5
Analog	174	12.5	1 W	6.15	6.36	12.5
			5 W	6.15	6.36	12.5
Digital	151	12.5	1 W	7.52	9.47	12.5
			5 W	7.52	9.47	12.5
Digital	162.5	12.5	1 W	7.52	9.40	12.5
			5 W	7.67	9.33	12.5
Digital	174	12.5	1 W	7.74	9.55	12.5
			5 W	7.45	9.62	12.5

Analog Modulation :


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 151 MHz (1 W)

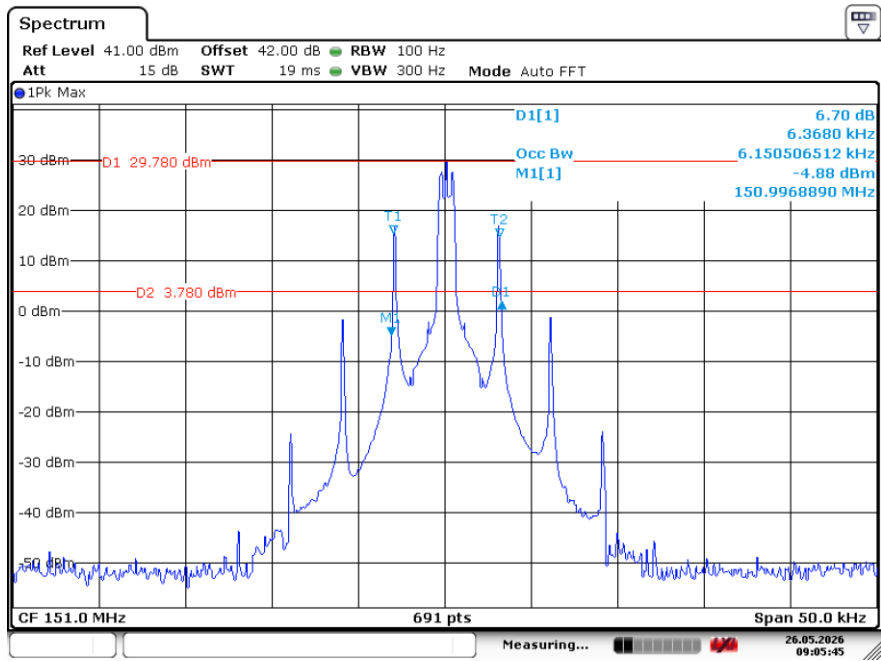


Emission Mask D 12.5 kHz, 151 MHz (1 W)

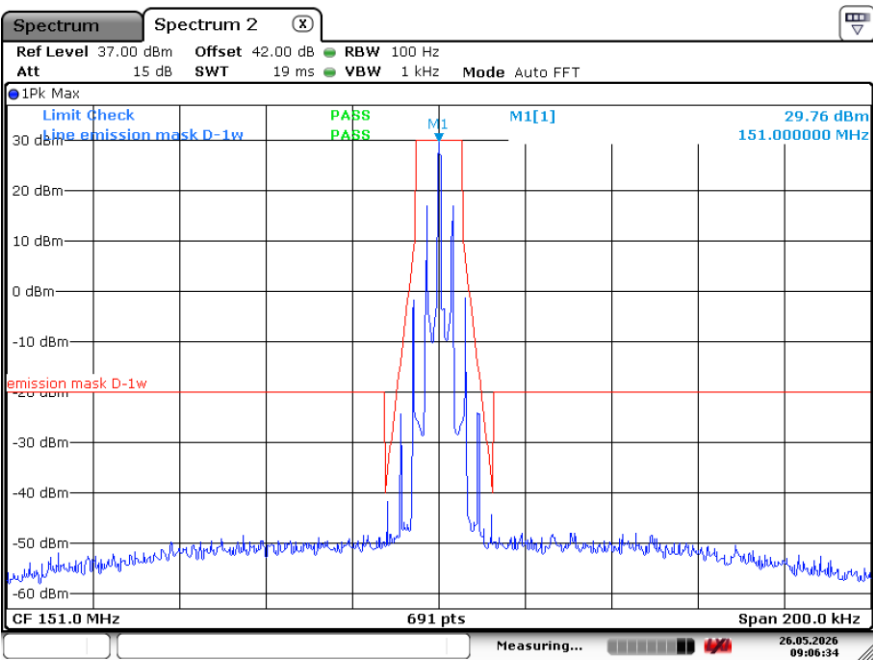


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 162.5 MHz (1 W)

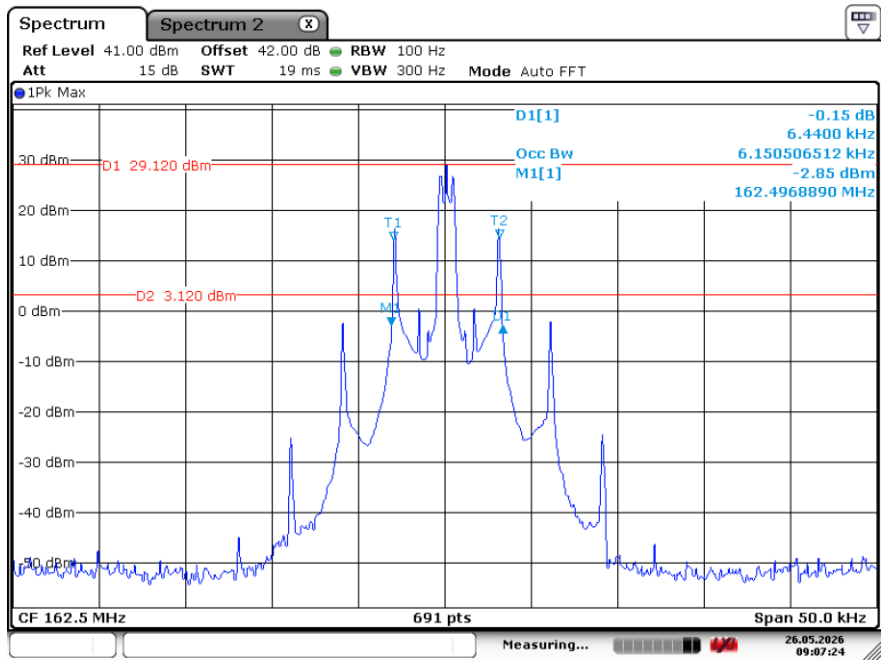


Emission Mask D 12.5 kHz, 162.5 MHz (1 W)

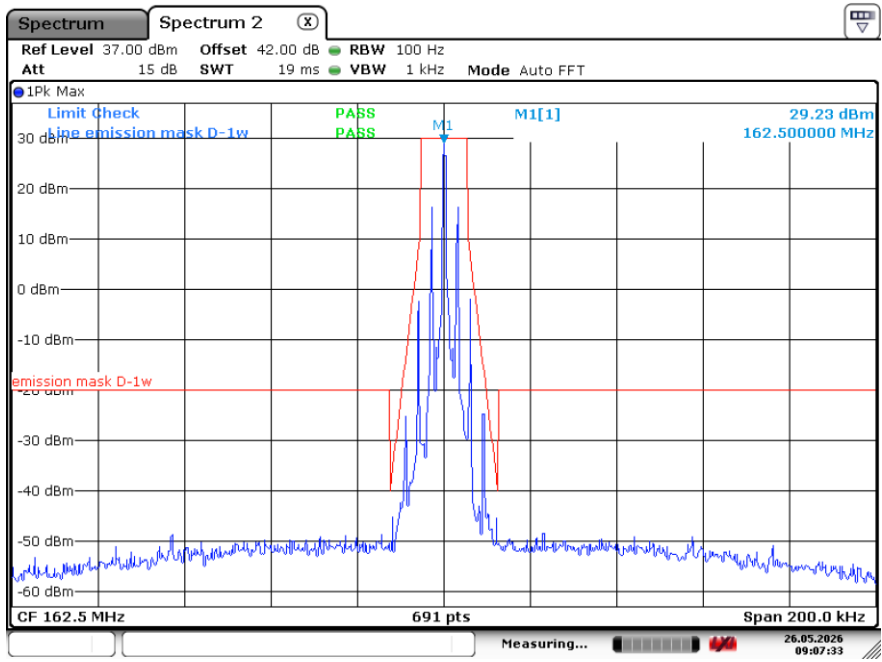


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 174 MHz (1 W)

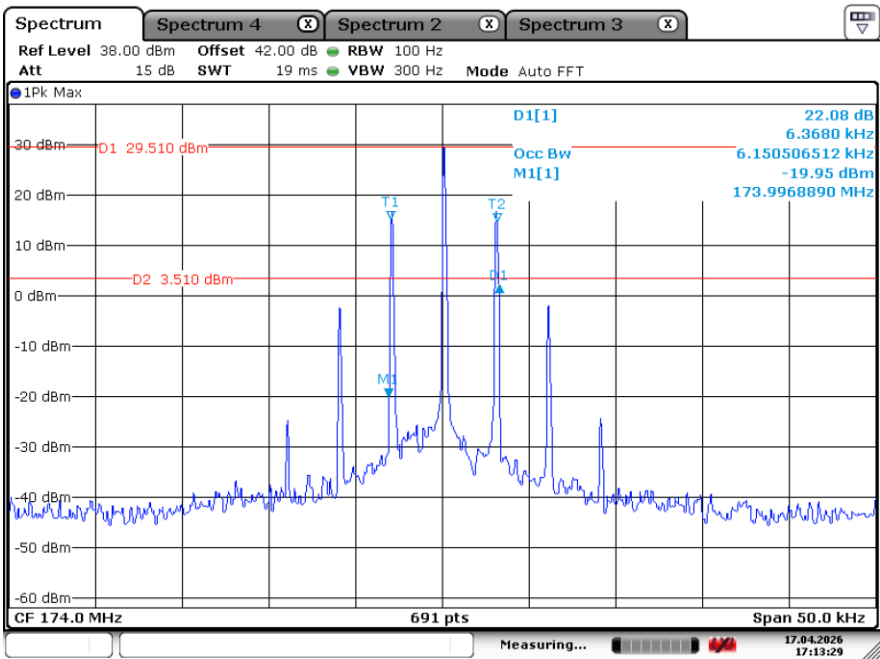


Emission Mask D 12.5 kHz, 174 MHz (1 W)

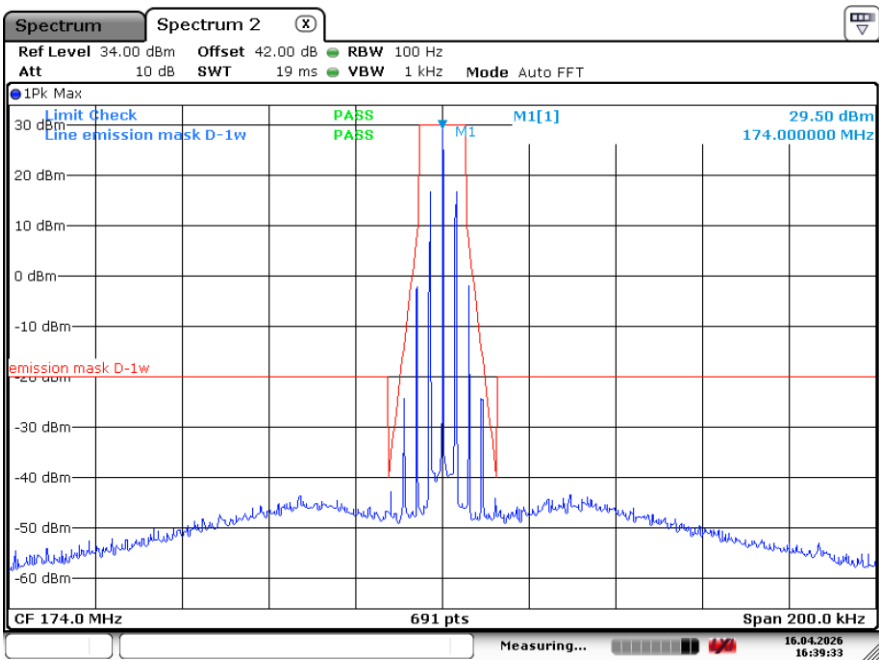


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 151 MHz (5 W)

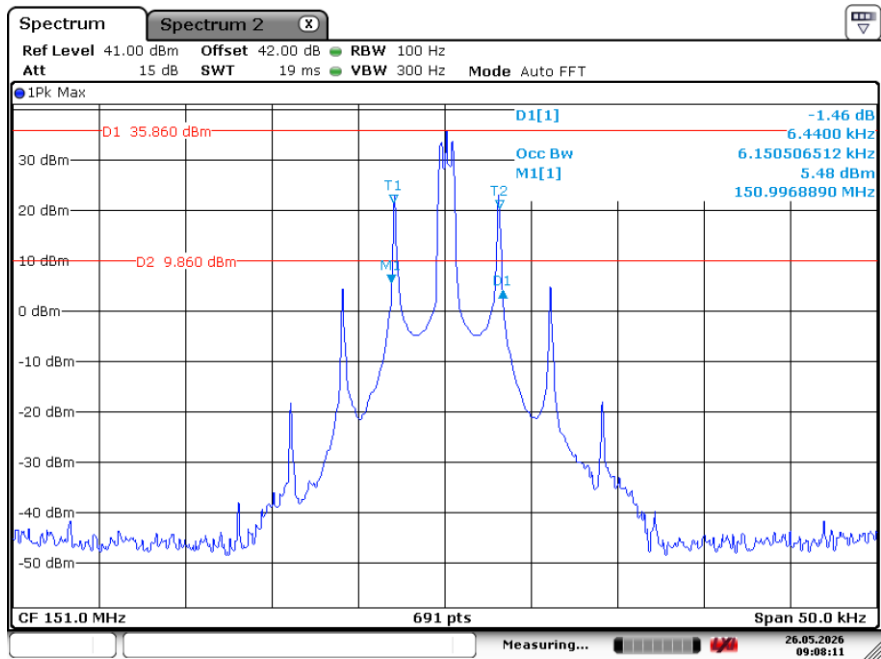


Emission Mask D 12.5 kHz, 151 MHz (5 W)

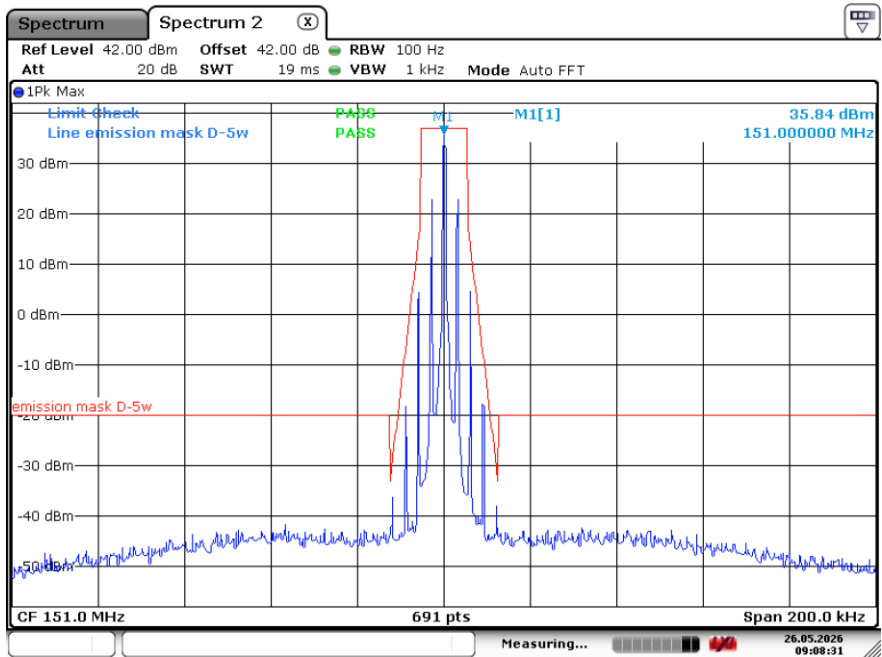


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 162.5 MHz (5 W)

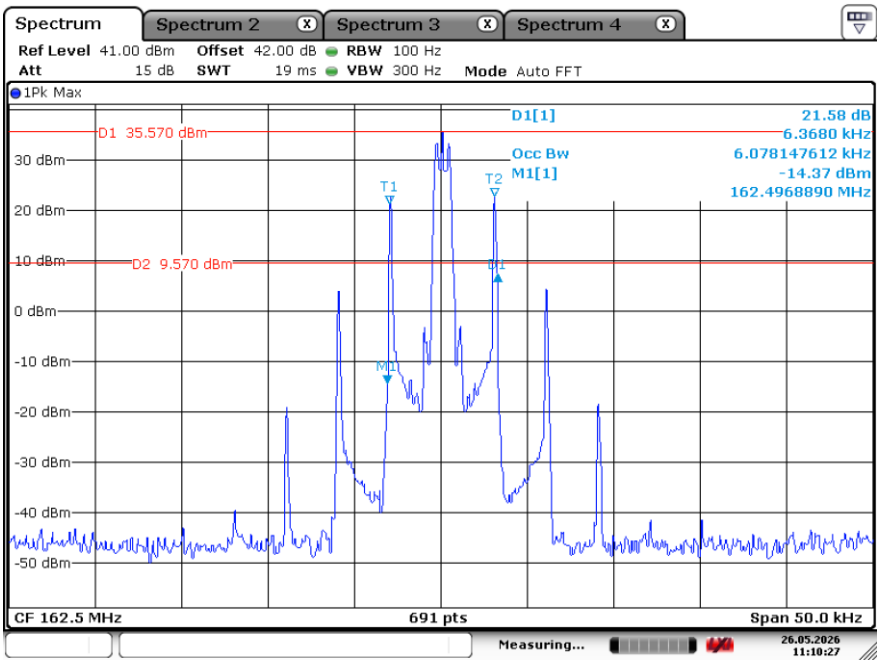


Emission Mask D 12.5 kHz, 162.5 MHz (5 W)

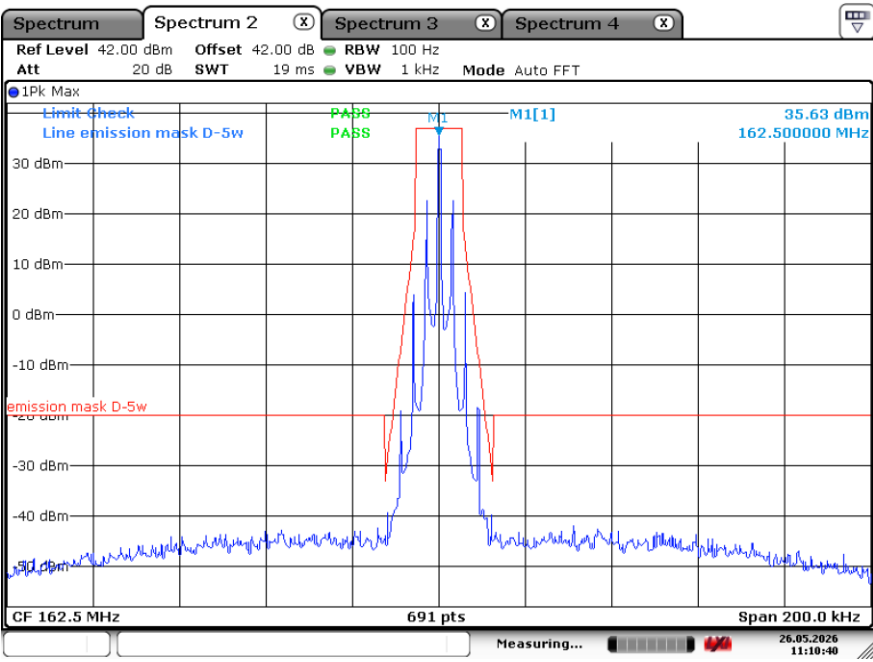

OBW & 26 dB Emissions Bandwidth 12.5 kHz, 174 MHz (5 W)

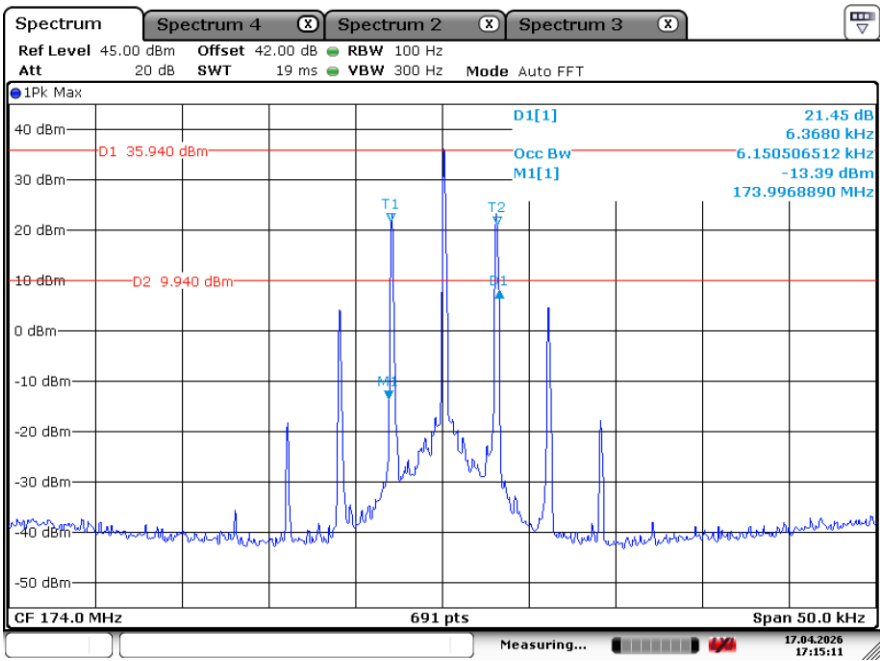


Emission Mask D 12.5 kHz, 174 MHz (5 W)

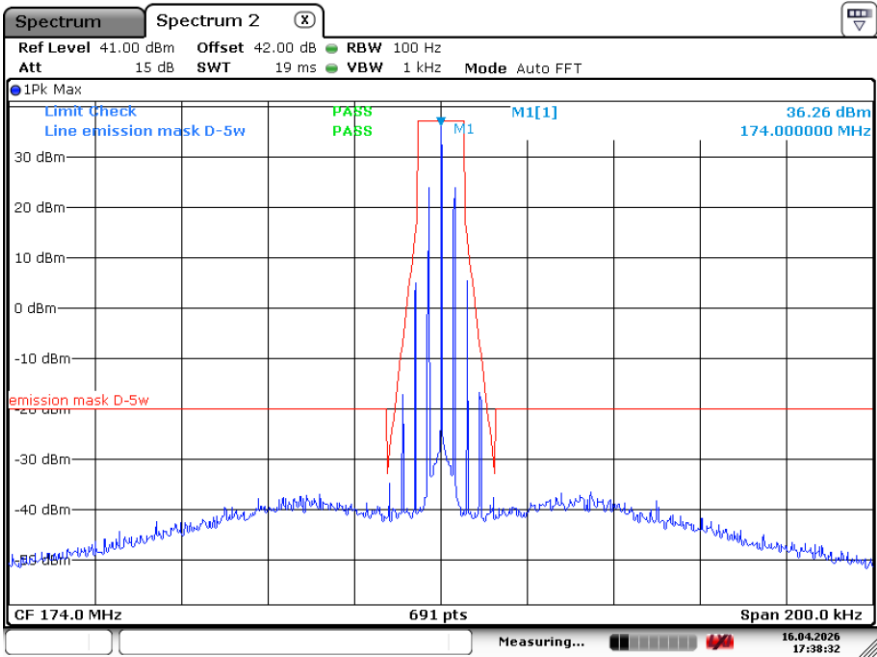


Digital Modulation :


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 151 MHz (1 W)

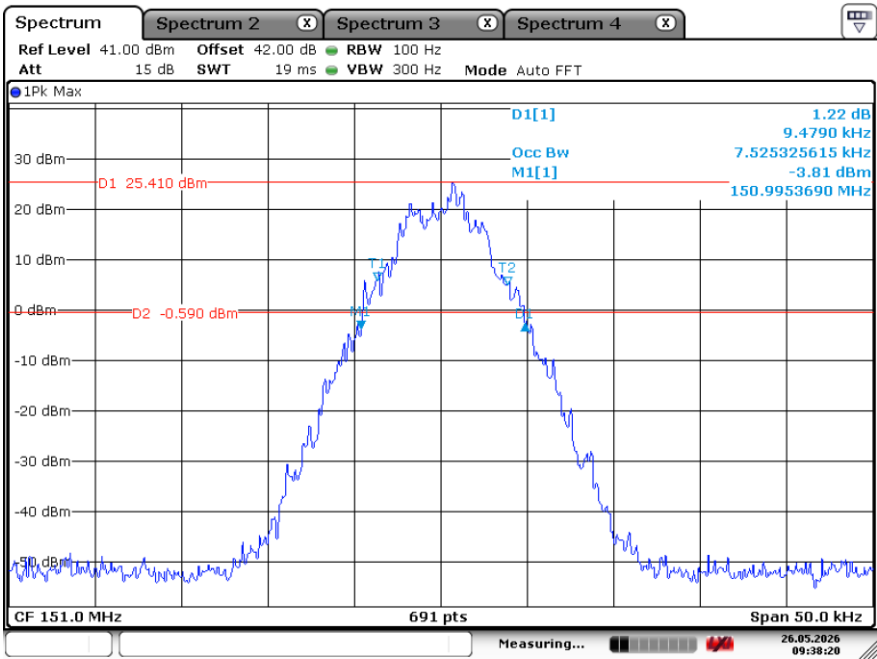


Emission Mask D 12.5 kHz, 151 MHz (1 W)

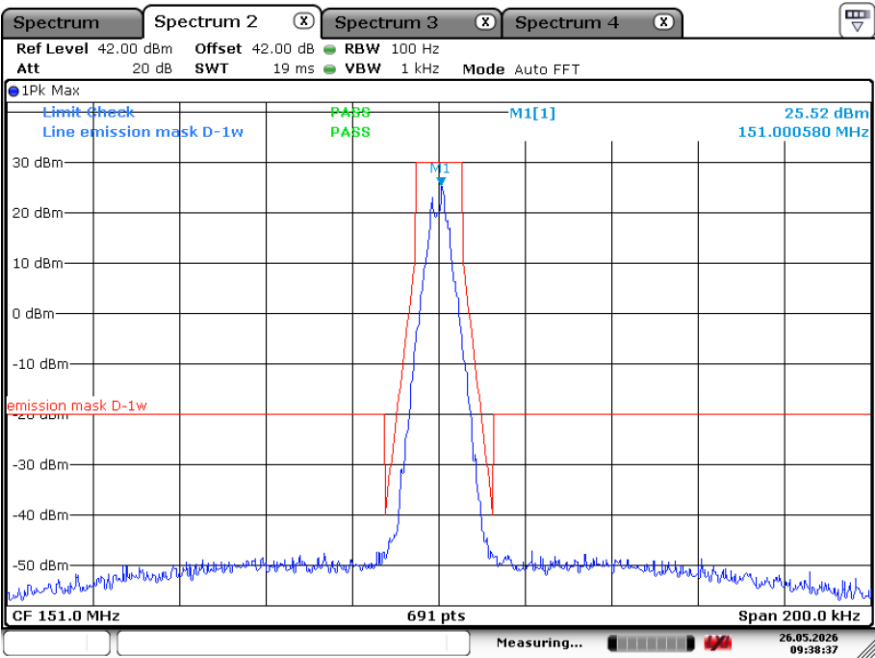


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 162.5 MHz (1 W)

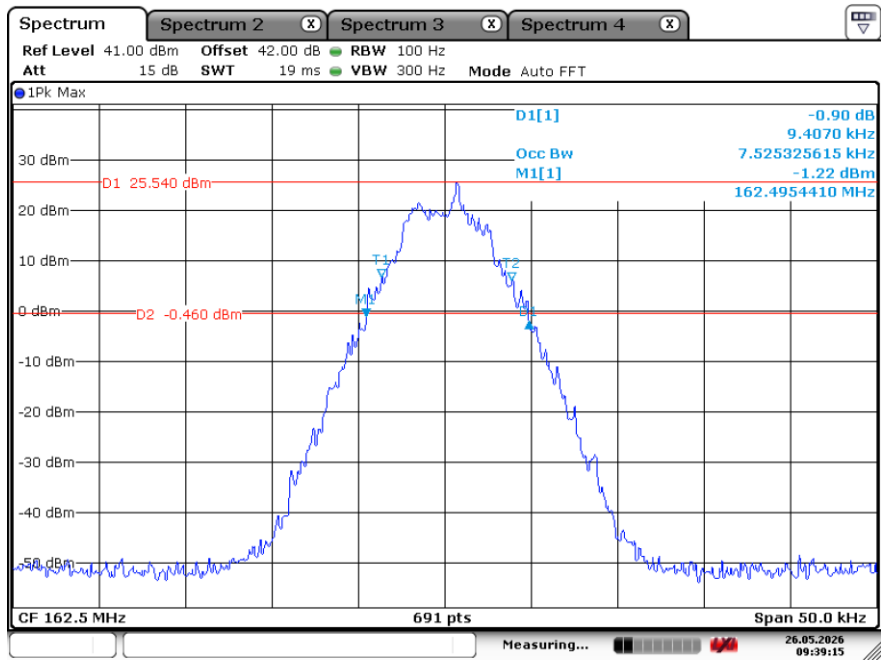


Emission Mask D 12.5 kHz, 162.5 MHz (1 W)

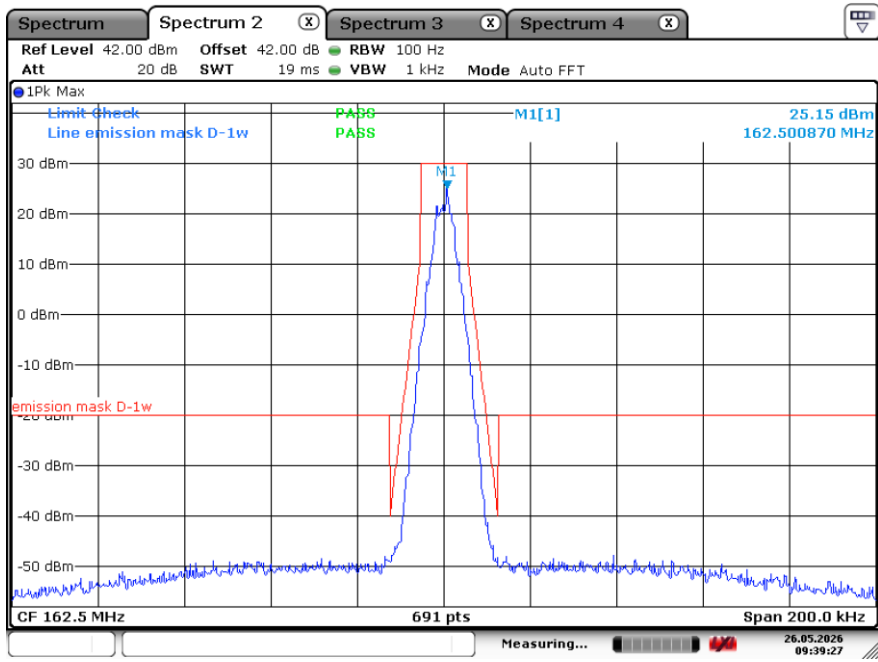


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 174 MHz (1 W)

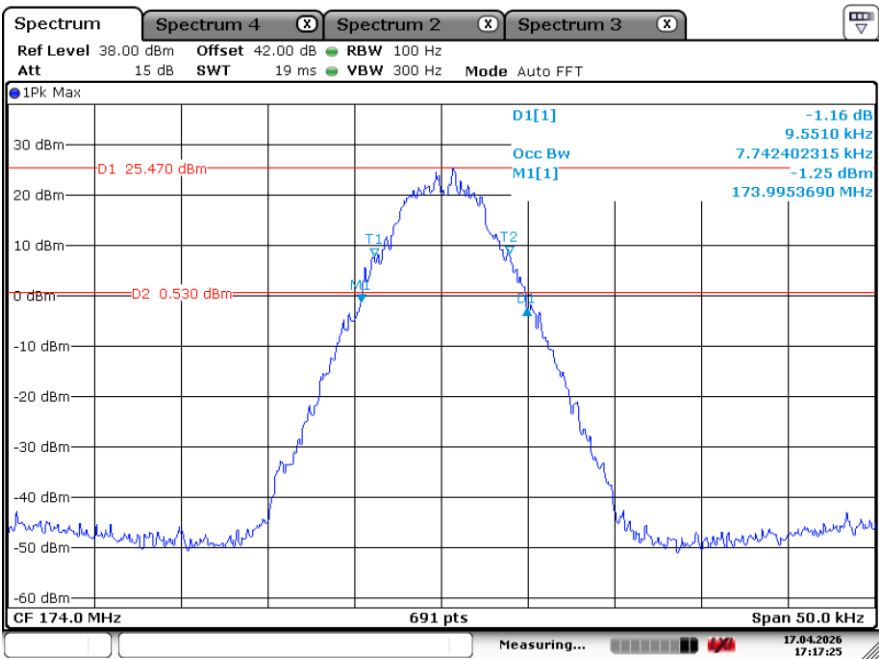


Emission Mask D 12.5 kHz, 174 MHz (1 W)

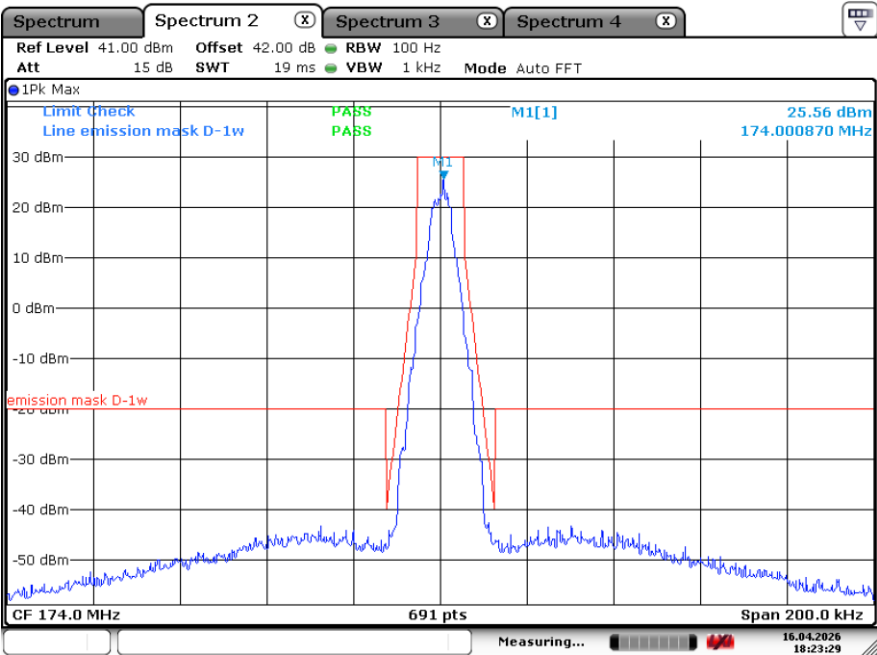


OBW & 26 dB Emissions Bandwidth 12.5 kHz, 162.5 MHz (5 W)

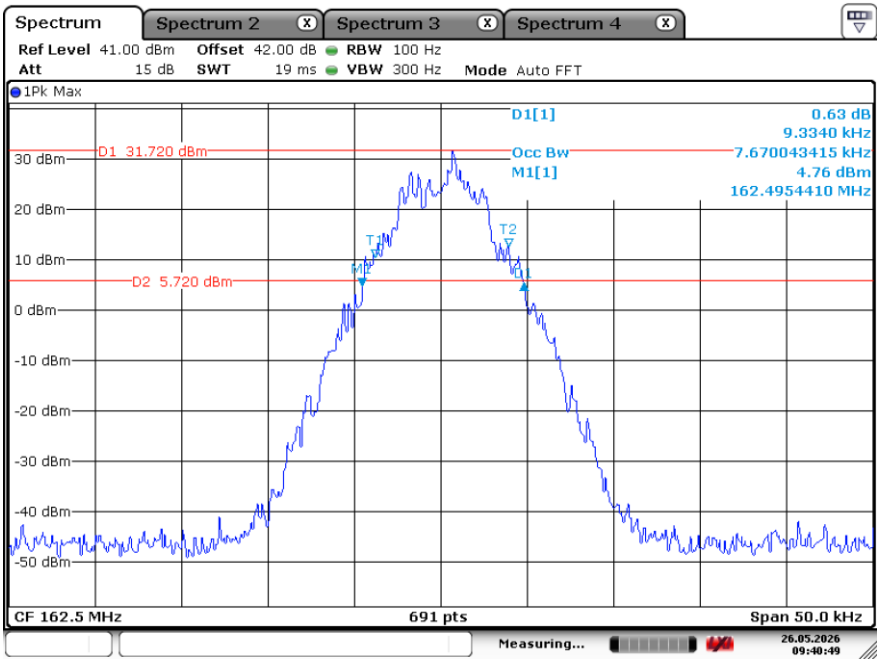


Emission Mask D 12.5 kHz, 162.5 MHz (5 W)

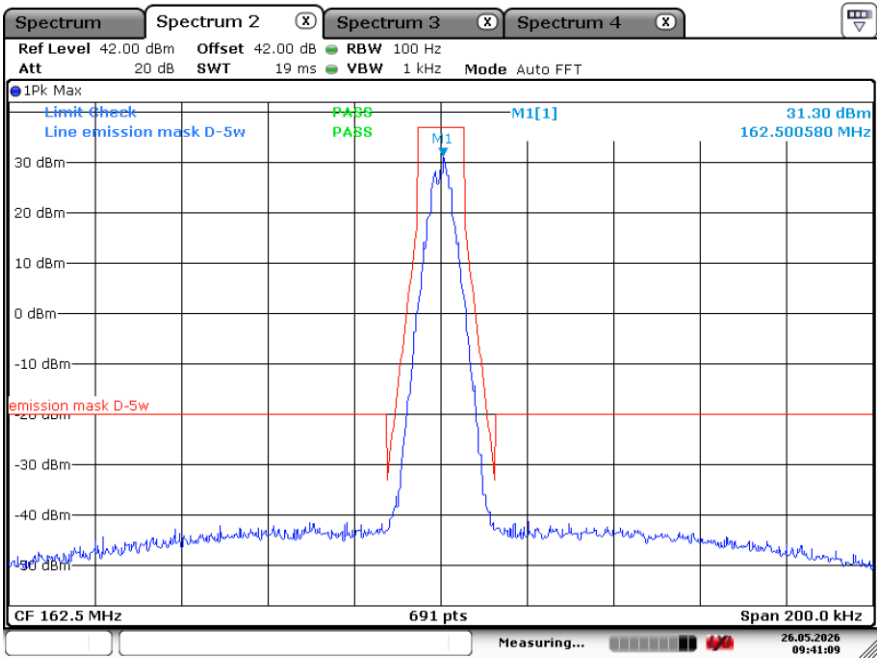

OBW & 26 dB Emissions Bandwidth 12.5 kHz, 174 MHz (5 W)

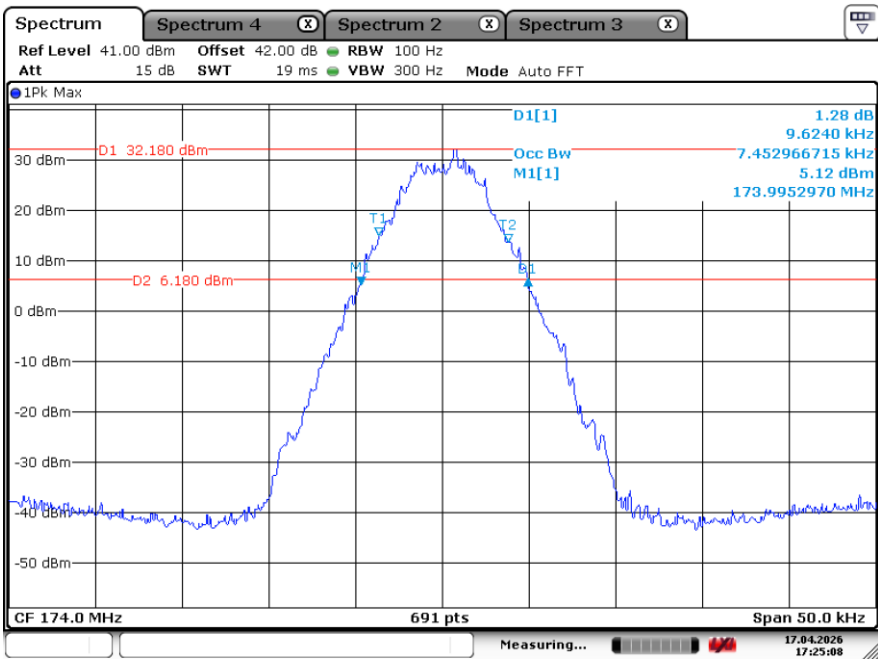

Emission Mask D 12.5 kHz, 174 MHz (5 W)

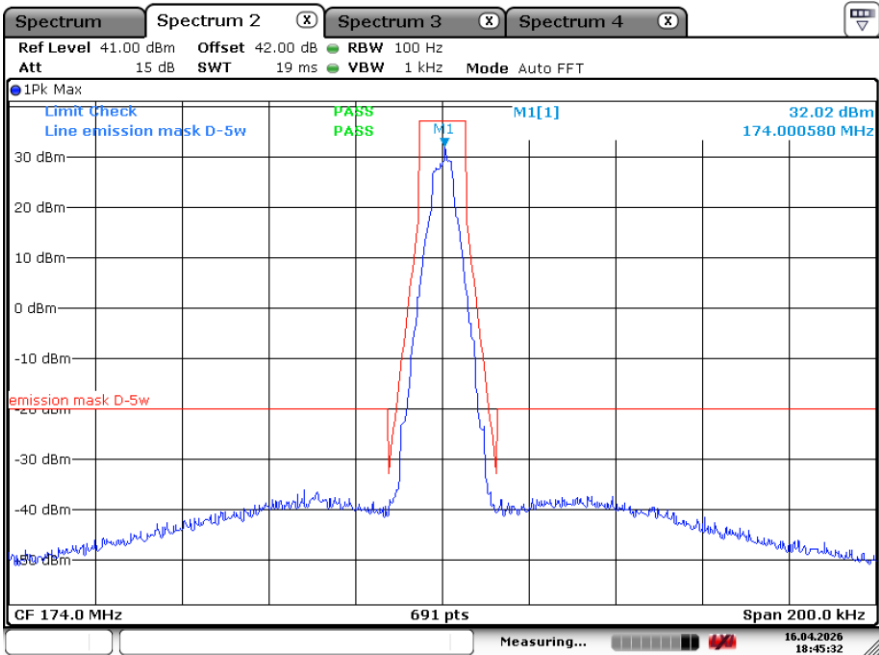

3.2.5 SPURIOUS EMISSIONS AT ANTENNA

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask E—6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3 \text{ kHz})$ or $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.
- 3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.

The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above

instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Procedure


The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1 GHz, and 1 MHz for above 1 GHz. sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Result : **Compliance.**


Modulation	Frequency (MHz)	Channel Space (kHz)	Power Level	Maximum Conducted Spurious Emissions Below 1 GHz				Maximum Conducted Spurious Emissions Above 1 GHz				FCC Limit
				Frequency (MHz)	Measurement (dBm)	C.L + ATT (dBm)	Results (dBm)	Frequency (MHz)	Measurement (dBm)	C.L + ATT (dBm)	Results (dBm)	
Analog	151	12.5										-20 dBm
			1 W	301.6	-77.93	42.35	-35.58	3972.5	-78.25	44.03	-34.22	
			5 W	301.6	-75.33	42.35	-32.98	4366.1	-77.70	44.15	-33.55	
Digital	151	12.5										-20 dBm
			1 W	301.6	-77.44	42.35	-35.09	4736.6	-77.82	44.20	-33.62	
			5 W	301.6	-76.55	42.35	-34.20	4175.1	-77.50	44.08	-33.42	
Analog	162.5	12.5										-20 dBm
			1 W	325.5	-78.42	42.36	-36.06	4302.5	-76.97	44.15	-32.82	
			5 W	325.5	-78.49	42.36	-36.13	4846.6	-77.38	44.22	-33.16	
Digital	162.5	12.5										-20 dBm
			1 W	325.5	-78.96	42.36	-36.60	4337.2	-77.41	44.15	-33.26	
			5 W	325.5	-76.92	42.36	-34.56	4348.8	-77.35	44.15	-33.20	
Analog	174	12.5										-20 dBm
			1 W	348.00	-78.06	42.38	-35.68	4985.5	-77.59	44.22	-33.37	
			5 W	348.00	-79.19	42.38	-36.81	4823.4	-77.97	44.22	-33.75	
Digital	174	12.5										-20 dBm
			1 W	348.00	-77.49	42.38	-35.11	4082.5	-76.84	44.06	-32.78	
			5 W	348.00	-77.70	42.38	-35.32	4261.9	-77.60	44.11	-33.49	

Digital Modulation :


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 151 MHz (1 W)

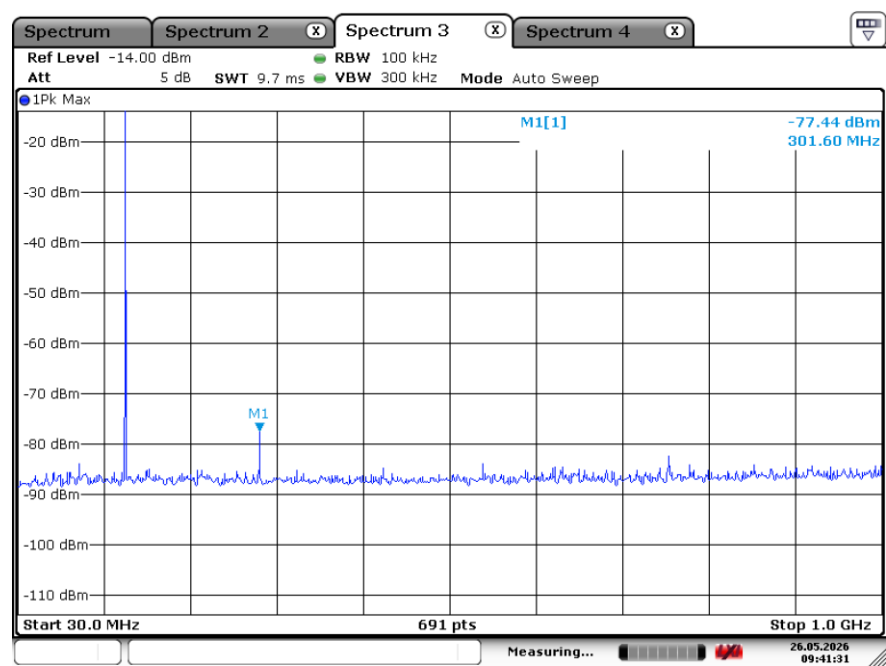


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 151 MHz (1 W)

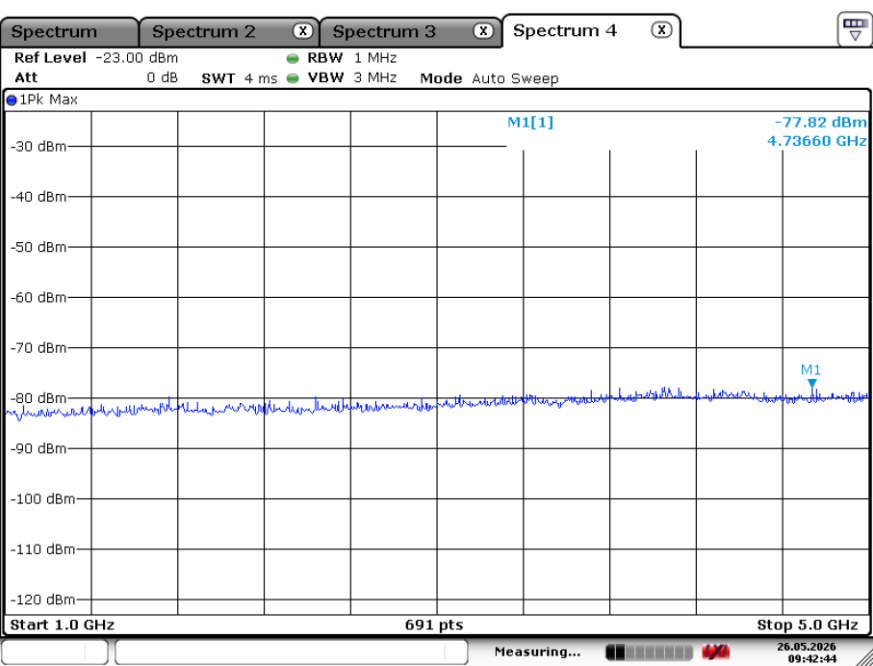


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 162.5 MHz (1 W)

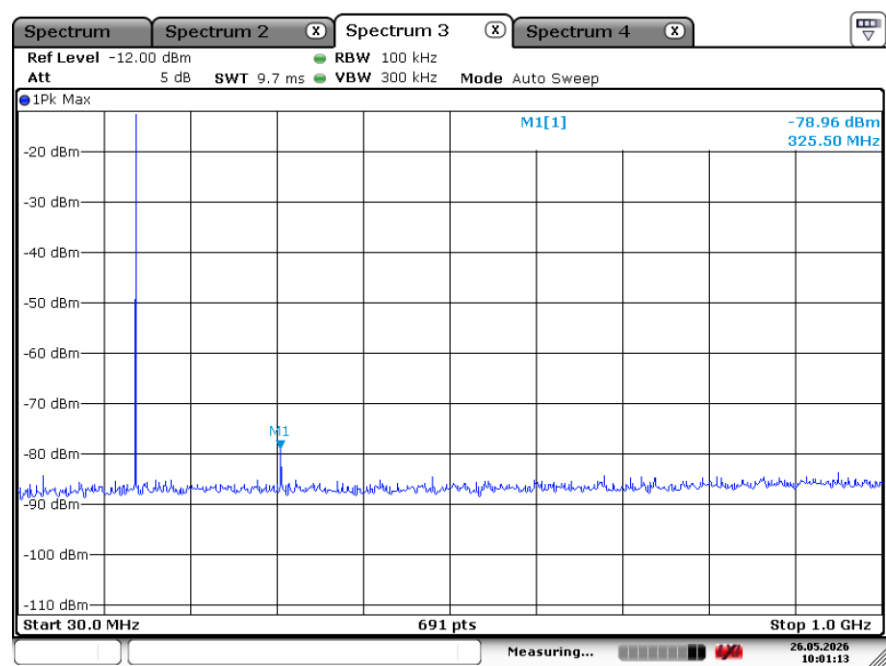


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 162.5 MHz (1 W)

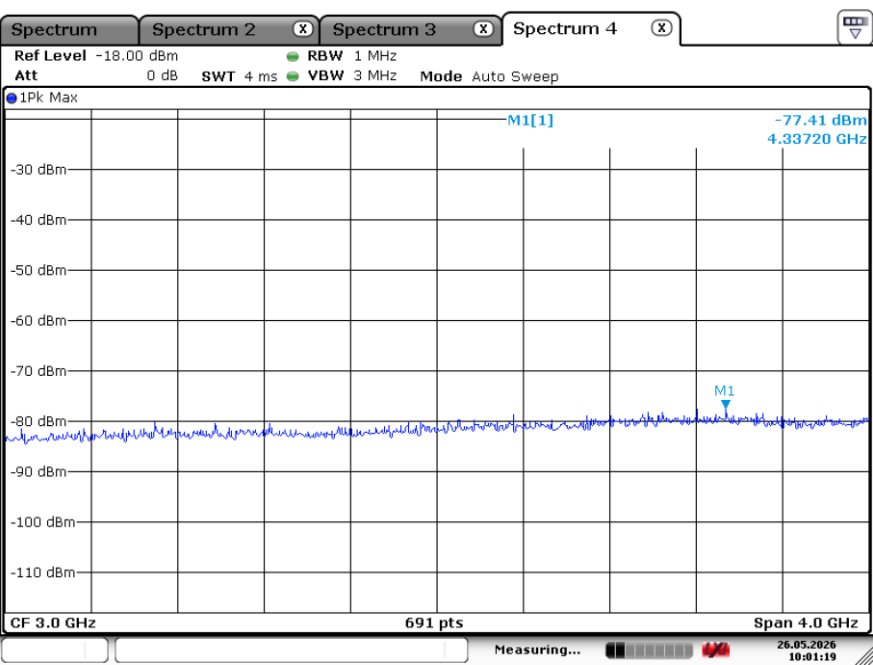


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 174 MHz (1 W)

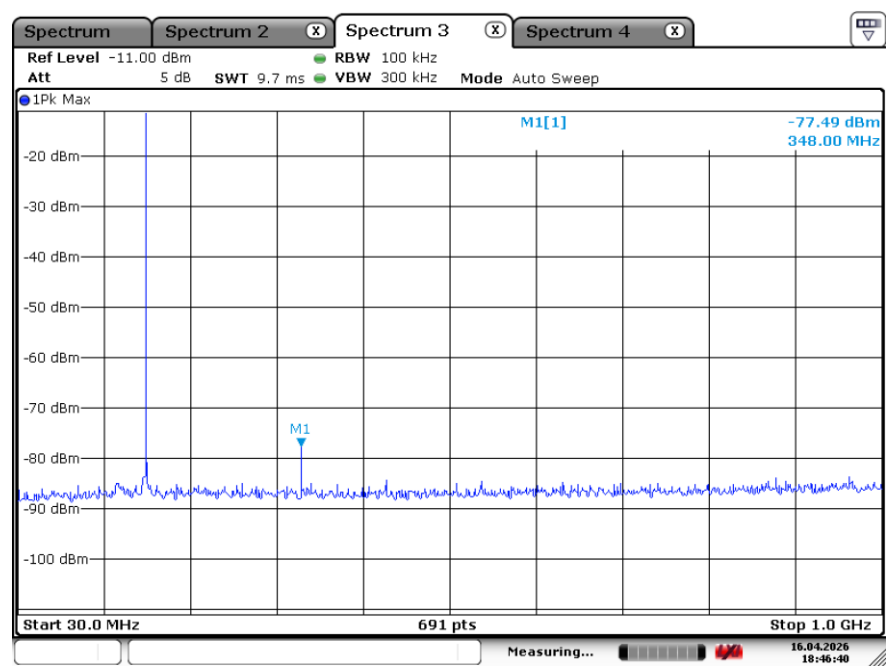


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 174 MHz (1 W)

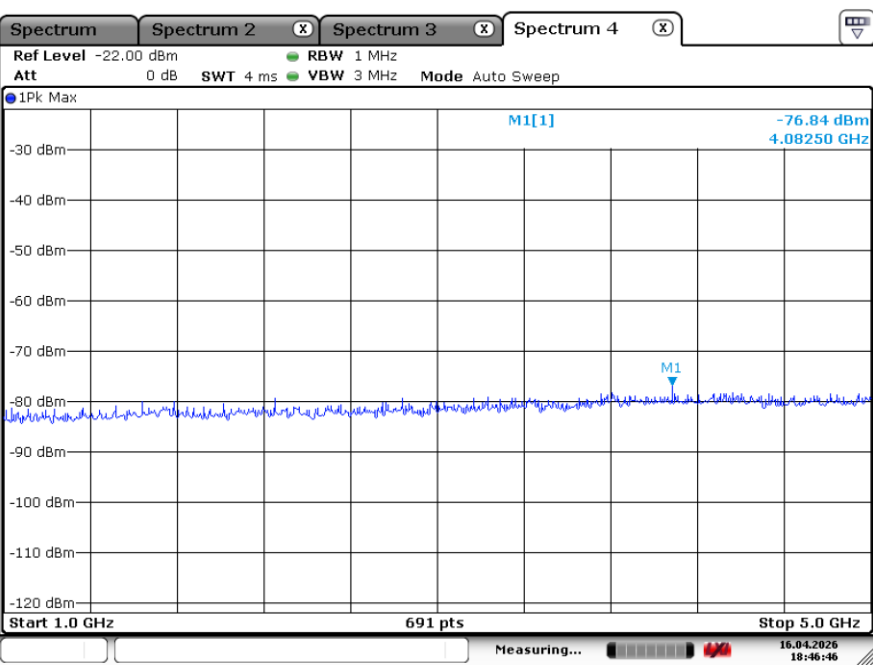


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 151 MHz (5 W)

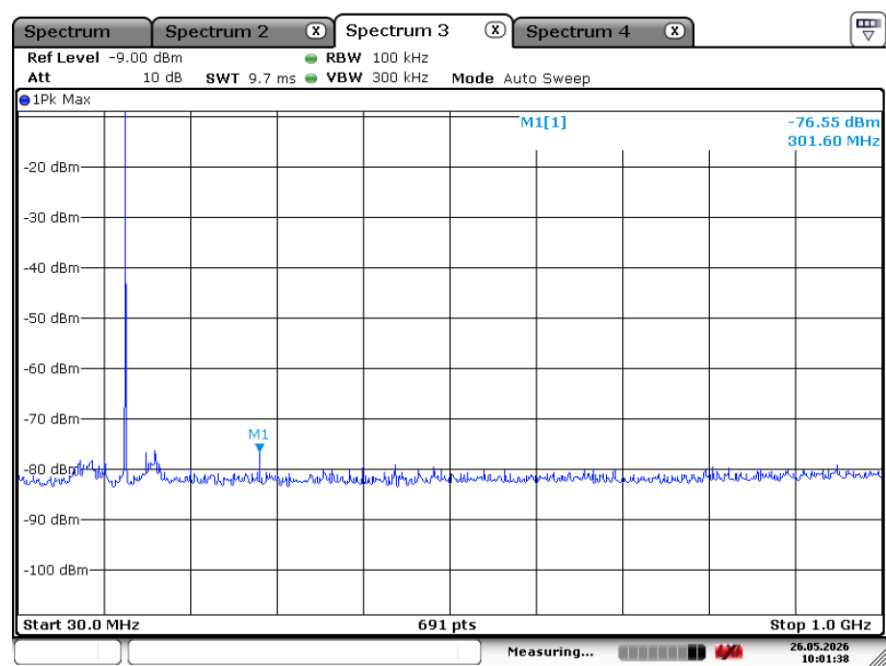


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 151 MHz (5 W)

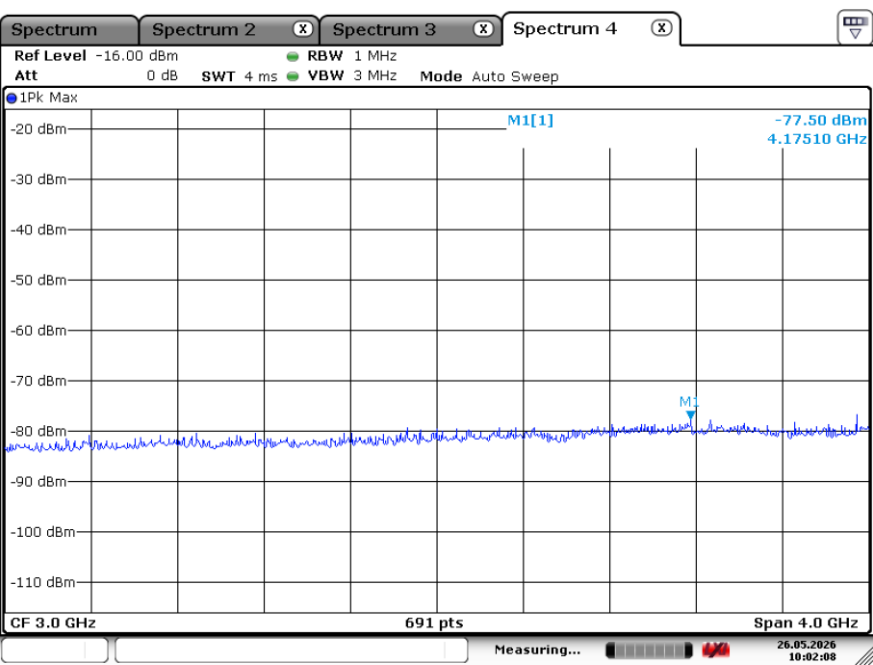


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 162.5 MHz (5 W)

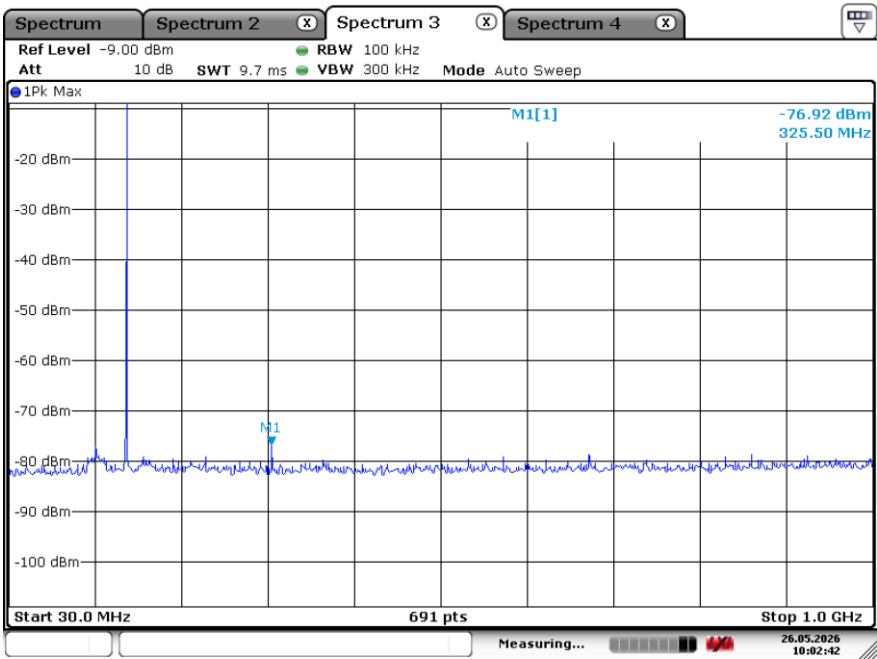


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 162.5 MHz (5 W)

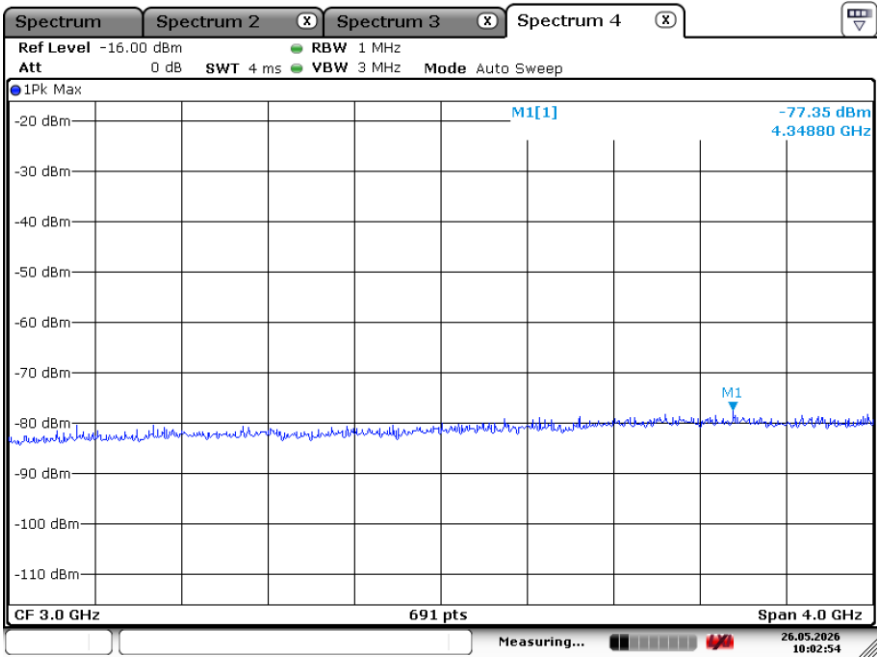

30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 174 MHz (5 W)

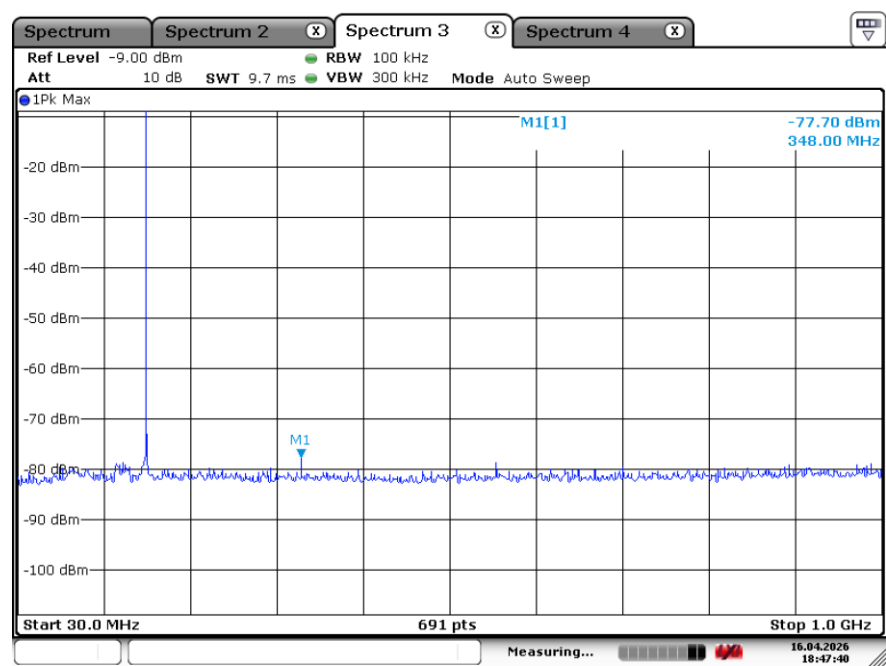


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 174 MHz (5 W)

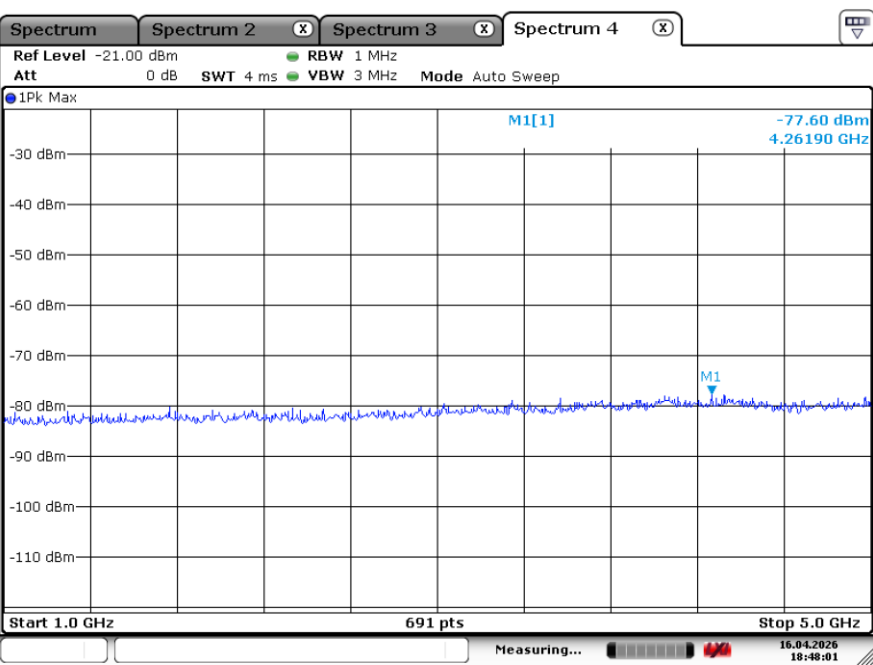


Analog Modulation :


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 151 MHz (1 W)

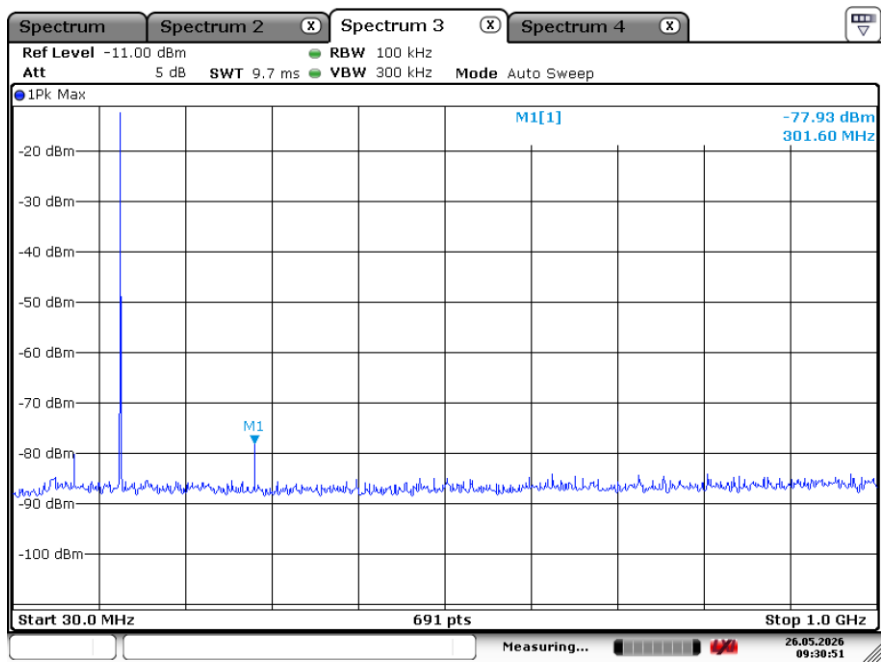


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 151 MHz (1 W)

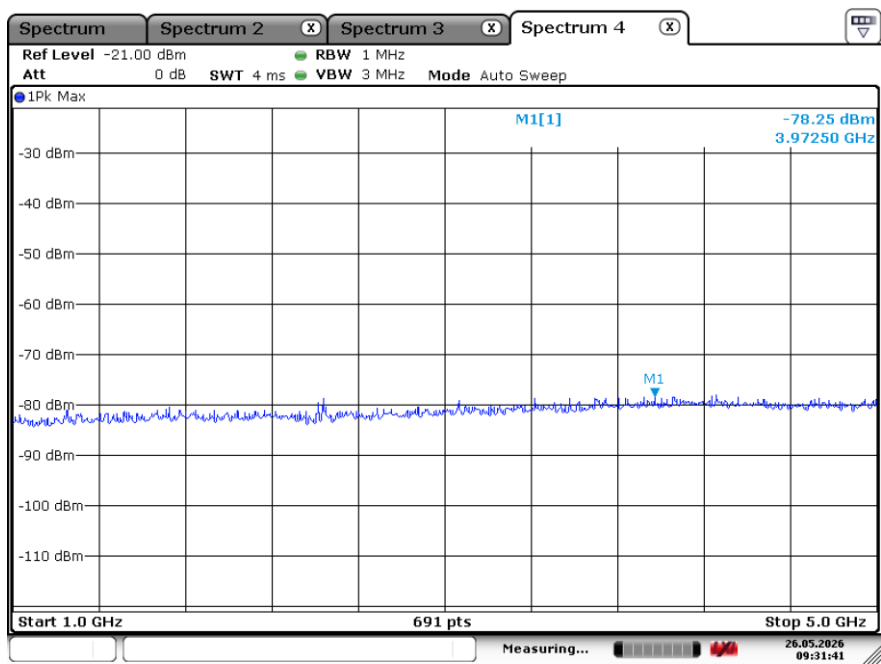


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 162.5 MHz (1 W)

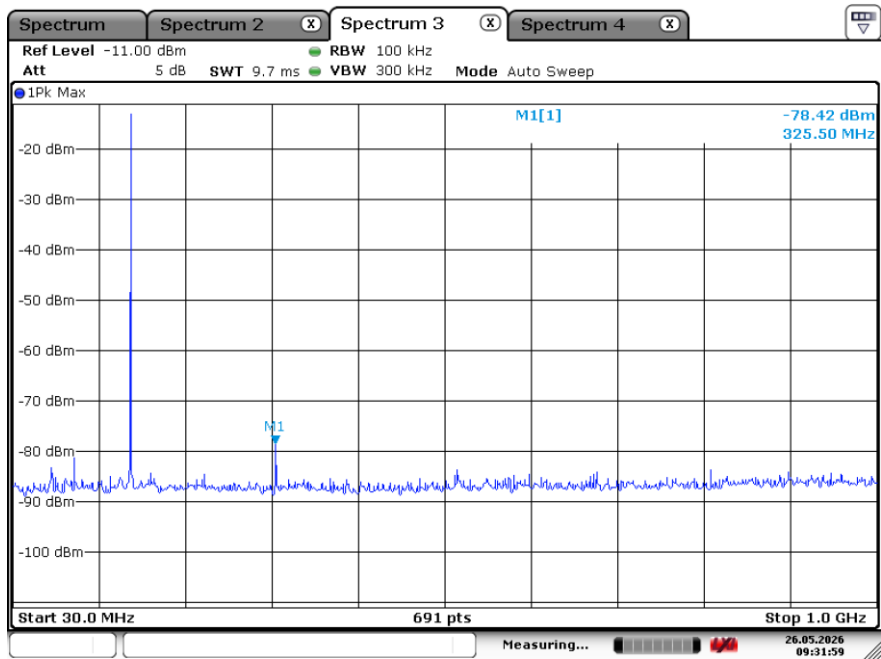


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 162.5 MHz (1 W)

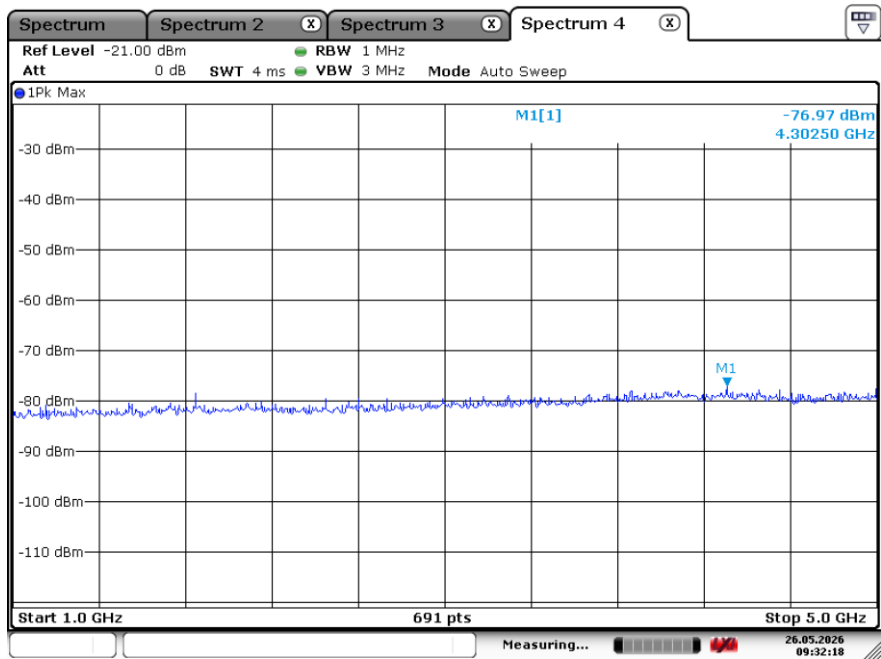


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 174 MHz (1 W)

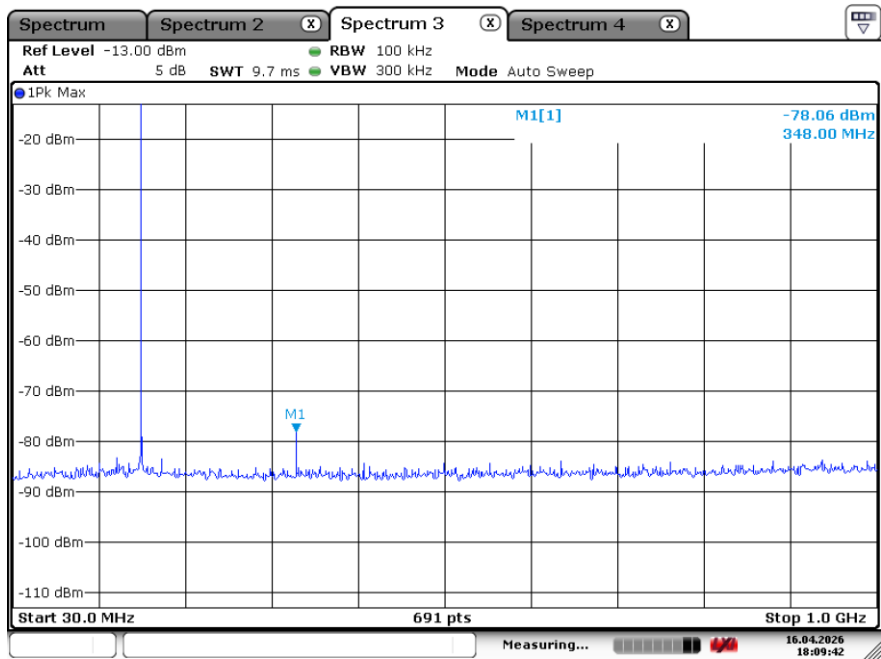


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 174 MHz (1 W)

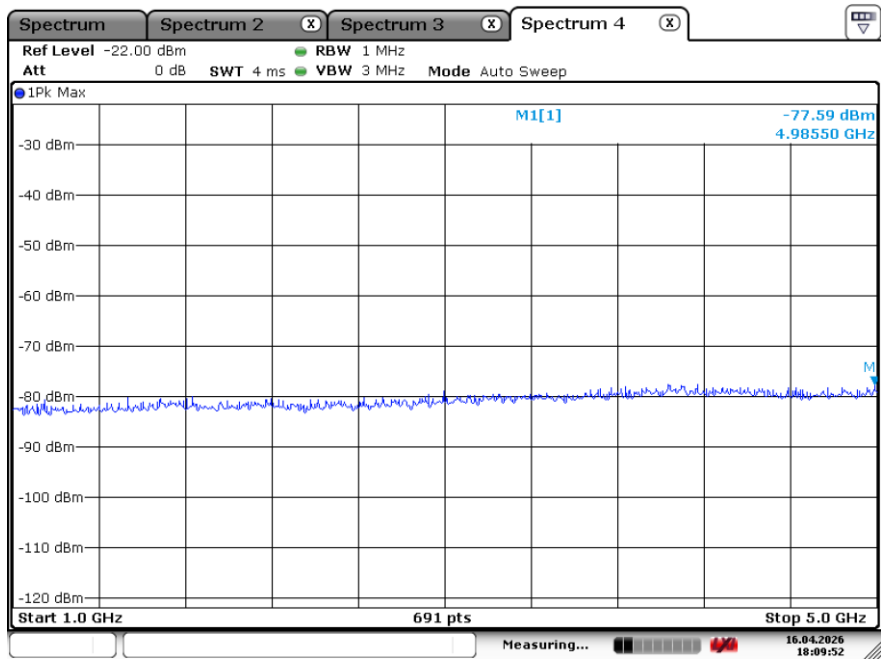


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 151 MHz (5 W)

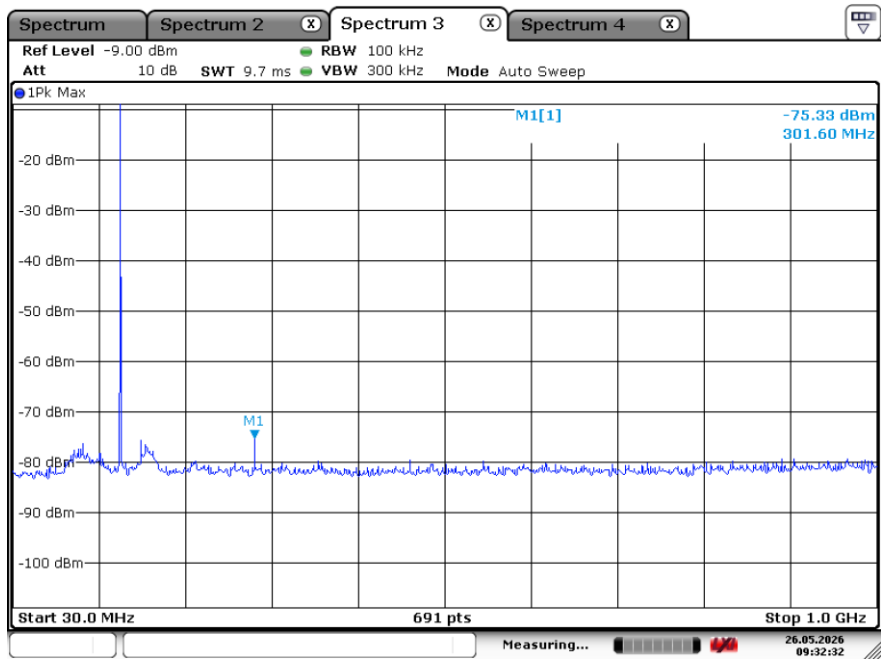


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 151MHz (5 W)

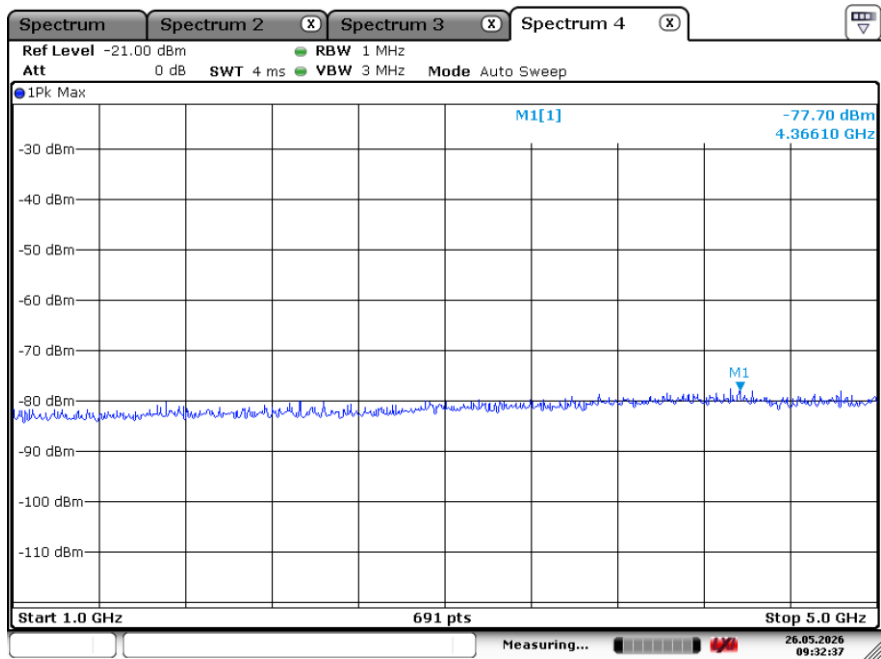


30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 162.5 MHz (5 W)

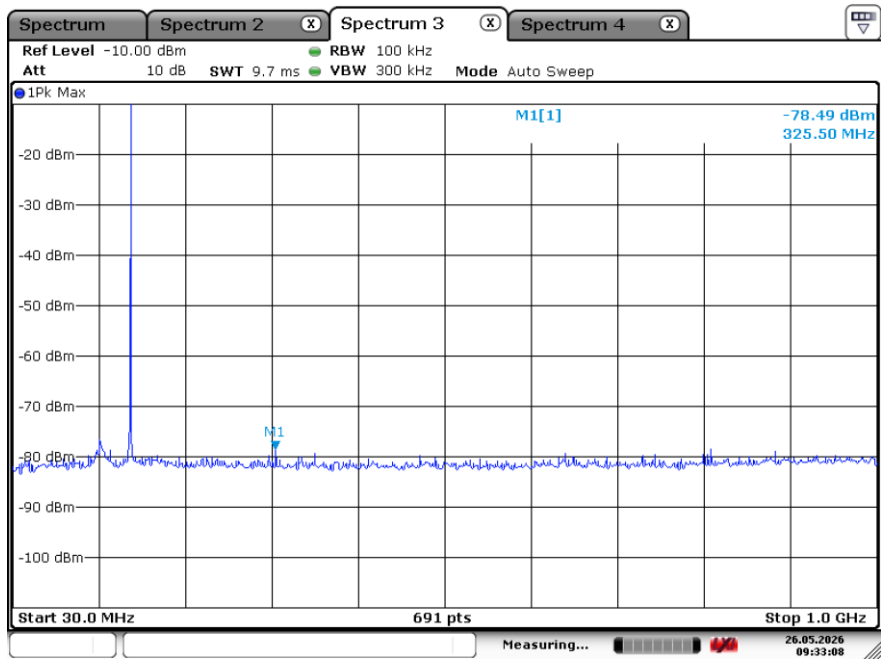


1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 162.5 MHz (5 W)

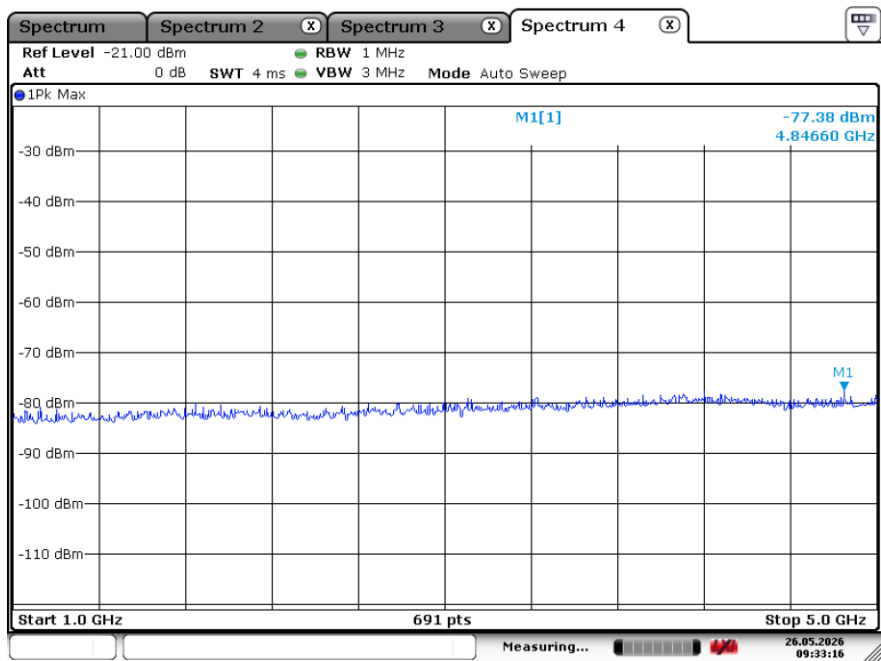

30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 174 MHz (5 W)

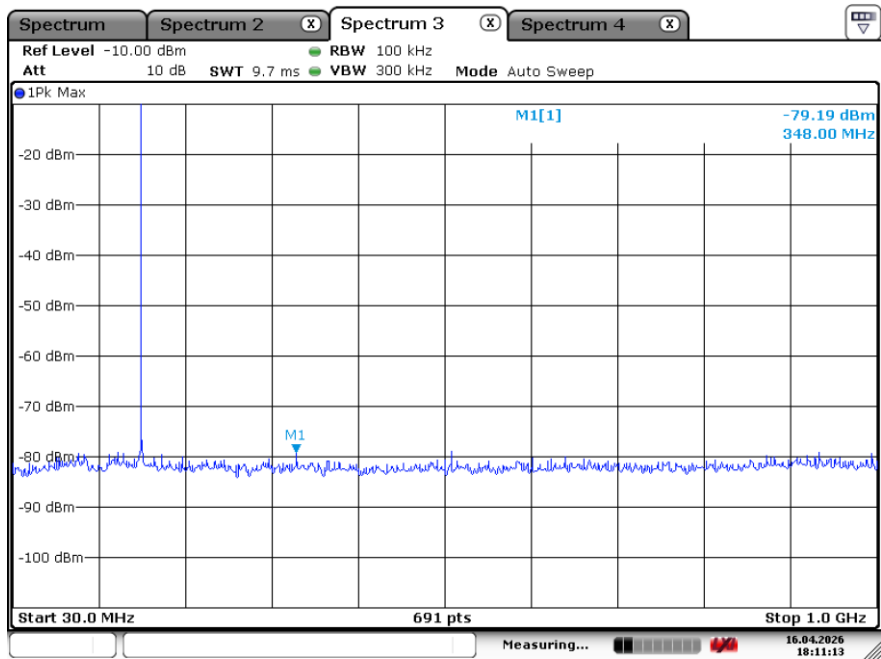

1 GHz – 6 GHz, Spacing Channel 12.5 kHz, 174 MHz (5 W)

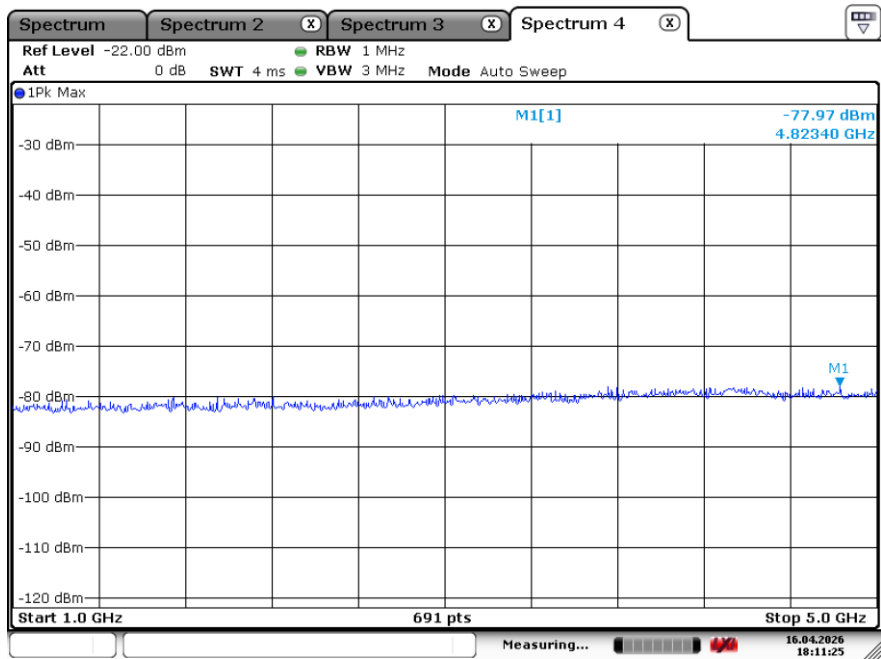

3.2.6 RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ - the absolute level

Spurious attenuation limit in dB = $50 + 10 \lg_{10}(\text{power out in Watts})$ for EUT with a 12.5 kHz channel bandwidth.

Spurious attenuation limit in dB = $55 + 10 \lg_{10}(\text{power out in Watts})$ for EUT with a 6.25 kHz channel bandwidth.

Test Result : Compliance.

Measurement Data: Transmitting**30 MHz – 2GHz**

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCCpart90	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
Analog Modulation 162.5 MHz, Channel Spacing 12.5 KHz										
812.46	43.52	342	1	H	-46.04	0.86	0	-46.90	-20	26.90
812.46	42.17	31	1	V	-44.71	0.86	0	-45.57	-20	25.57
1787.54	59.83	346	1	H	-37.91	1.42	6.7	-32.63	-20	12.63
1787.54	58.34	52	1	V	-37.54	1.42	6.7	-32.26	-20	12.26
1950.27	56.73	325	1	H	-48.23	1.58	7.8	-42.01	-20	22.01
1950.27	52.88	57	1	V	-46.58	1.58	7.8	-40.36	-20	20.36
Digital Modulation 162.5 MHz, Channel Spacing 12.5 KHz										
812.53	43.27	351	1	H	-48.58	0.87	0	-49.45	-20	29.45
812.53	41.94	81	1	V	-45.35	0.87	0	-46.22	-20	26.22
1787.41	58.41	336	1	H	-42.46	1.41	6.7	-37.17	-20	17.17
1787.41	56.29	39	1	V	-40.97	1.41	6.7	-35.68	-20	15.68
1950.31	60.84	339	1	H	-51.28	1.57	7.8	-45.05	-20	25.05
1950.31	59.21	54	1	V	-48.36	1.57	7.8	-42.13	-20	22.13

Note : Absolute Level = SG Level-Cable loss + Antenna Gain

Margin = Limit – Absolute Level

3.2.7 FREQUENCY STABILITY

Applicable Standard

FCC §2.1055 and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

For Analog Modulation

Reference Frequency : 162.5 MHz, Limit : ± 2.5 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Power Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.4	162.500014	0.068
40	7.4	162.500018	0.105
30	7.4	162.500022	0.123
20	7.4	162.500025	0.135
10	7.4	162.500028	0.148
0	7.4	162.500030	0.172
-10	7.4	162.500033	0.185
-20	7.4	162.500035	0.209
-30	7.4	162.500038	0.228
Frequency Stability versus Input Voltage			
20	7.4	162.500025	0.135

For Digital Modulation

Reference Frequency : 162.5 MHz, Limit : ± 2.5 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature ($^{\circ}\text{C}$)	Power Supplied (V_{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.4	162.500043	0.265
40	7.4	162.500040	0.246
30	7.4	162.500035	0.215
20	7.4	162.500032	0.197
10	7.4	162.500036	0.222
0	7.4	162.500042	0.258
-10	7.4	162.500048	0.295
-20	7.4	162.500053	0.326
-30	7.4	162.500060	0.369
Frequency Stability versus Input Voltage			
20	7.4	162.500032	0.197

3.2.8 TRANSIENT FREQUENCY BEHAVIOR


Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100 dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15 ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

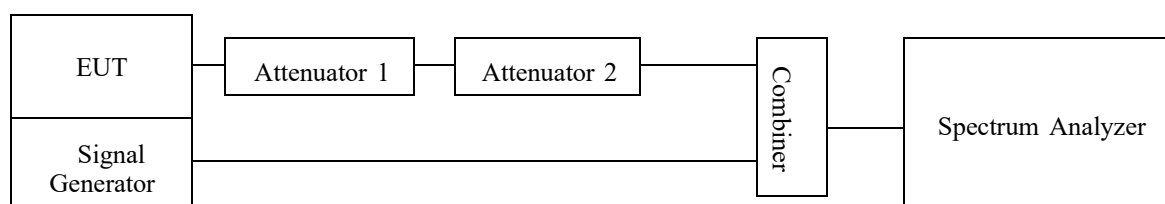


Measurement Data: Transmitting

Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	5 (t1)	<+/- 12.5 kHz	Compliance
	20 (t2)	<+/- 6.25 kHz	
	5 (t3)	<+/- 12.5 kHz	


Please refer to the following plots.

Channel Spacing 12.5 kHz

Trun ON

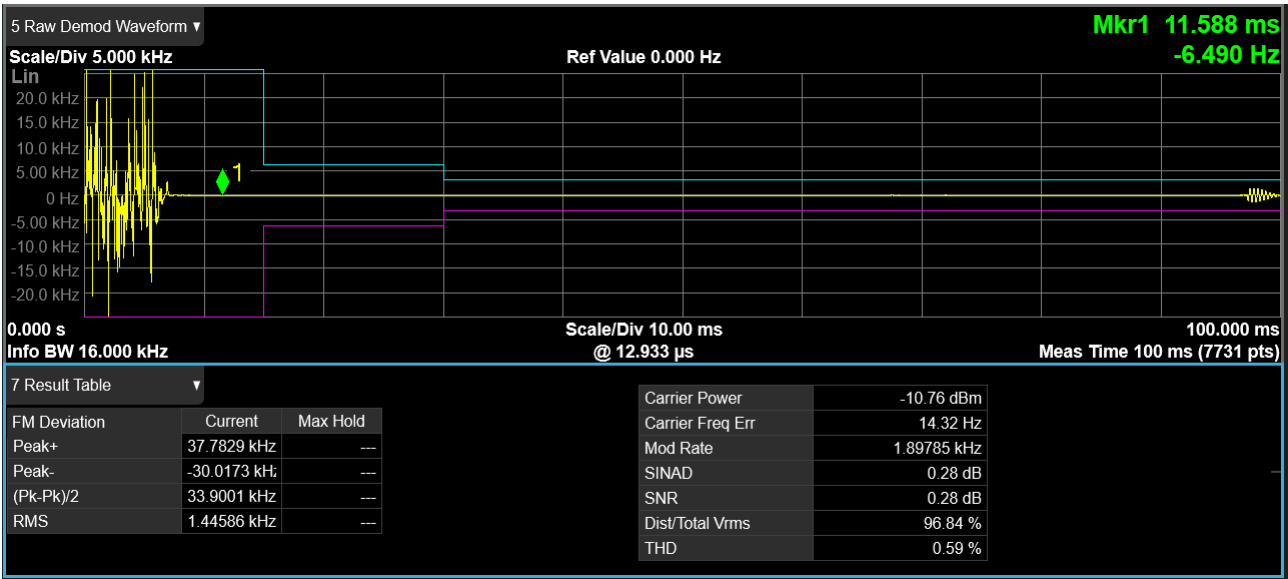

Trun OFF

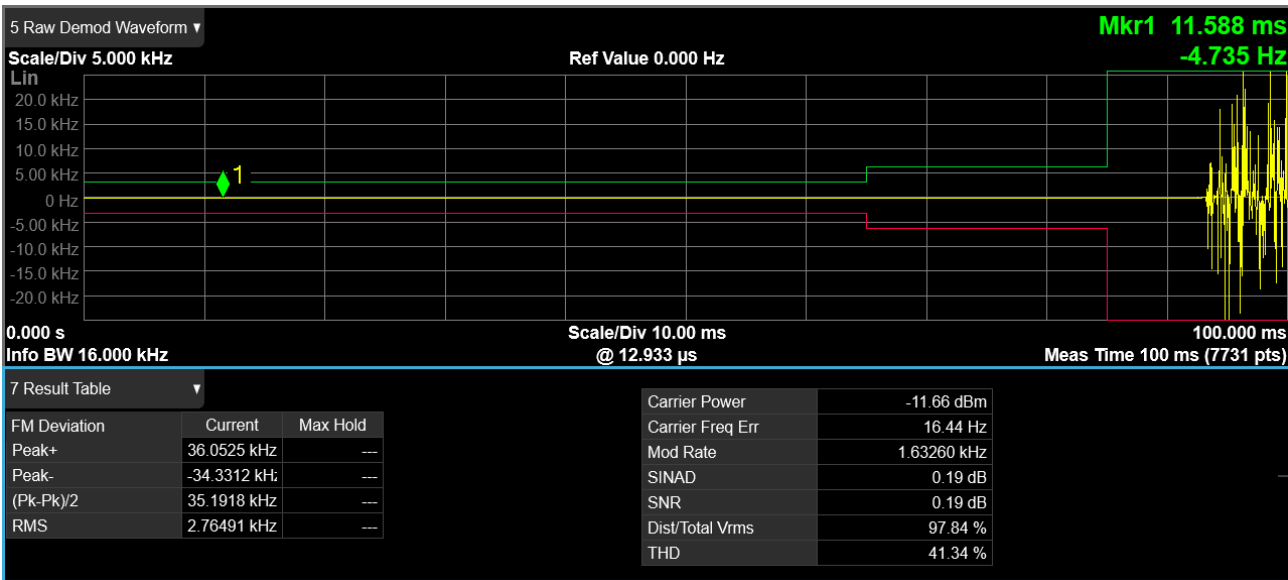

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2026-08-19
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2027-03-04
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2027-03-04
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2026-08-19
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2026-08-19
6	■	EMI Test Receiver (~7 GHz)	ESC17	100722	R&S	1 year	2026-08-19
7		RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2026-08-19
8		RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2027-03-04
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2028-08-30
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2028-03-04
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2028-03-04
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2028-03-04
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2027-03-04
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2027-03-04
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2026-08-19
19	■	Audio Analyzer	8903B	3729A18901	HP	1 year	2026-08-19
20	■	Modulation Analyzer	8901B	3749A05878	HP	1 year	2026-08-19
21	■	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2026-08-19
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2028-03-14
23	■	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2027-03-04
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2027-03-04
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2027-03-04
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2027-03-04
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2027-03-04
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2027-03-04
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2027-03-04
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2027-03-04
31	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2028-03-04