

FCC Test Report

Equipment : WiFi abgn module
Brand Name : TSC
Model No. : RF-WRN
FCC ID : VTV-RFWRN
Standard : 47 CFR FCC Part 15.407
Operating Band : 5150 MHz – 5250 MHz
5725 MHz – 5850 MHz
FCC Classification : UNII
Applicant : TSC Auto ID Technology Co., Ltd.
Manufacturer : No. 35, Sec. 2, Ligong 1st Rd., Wujie
Town, I-Lan County 26841, TAIWAN
Function : ☐ Outdoor AP; ☐ Indoor AP;
☐ Fixed P2P AP ☒ Portable Client

The product sample received on Aug. 22, 2015 and completely tested on Oct. 14, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Kevin Liang / Assistant Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	8
1.3	Testing Applied Standards	8
1.4	Testing Location Information.....	9
1.5	Measurement Uncertainty	10
2	TEST CONFIGURATION OF EUT	11
2.1	The Worst Case Modulation Configuration	11
2.2	The Worst Case Power Setting Parameter	11
2.3	The Worst Case Measurement Configuration.....	12
2.4	Test Setup Diagram	14
3	TRANSMITTER TEST RESULT	17
3.1	AC Power-line Conducted Emissions	17
3.2	Emission Bandwidth	20
3.3	RF Output Power.....	24
3.4	Peak Power Spectral Density.....	28
3.5	Transmitter Bandedge Emissions	32
3.6	Transmitter Unwanted Emissions.....	37
3.7	Frequency Stability.....	114
4	TEST EQUIPMENT AND CALIBRATION DATA	116
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications			
Report Clause	Ref. Std. Clause	Description	Result
1.1.2	15.203	Antenna Requirement	Complied
3.1	15.207	AC Power-line Conducted Emissions	Complied
3.2	15.407(a)	Emission Bandwidth	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted Output Power)	Complied
3.4	15.407(a)	Peak Power Spectral Density	Complied
3.5	15.407(b)	Transmitter Bandedge Emissions	Complied
3.6	15.407(b)	Transmitter Unwanted Emissions	Complied
3.7	15.407(g)	Frequency Stability	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information (5150-5250MHz band)					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)
5150-5250	a	5180-5240	36-48 [4]	1	12.27
5150-5250	n (HT20)	5180-5240	36-48 [4]	1	11.20

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

RF General Information (5725-5850MHz band)					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)
5725-5850	a	5745-5825	149-165 [5]	1	10.85
5725-5850	n (HT20)	5745-5825	149-165 [5]	1	10.88

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☒	Temporary RF connector provided
☐	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
☒	External antenna (dedicated antennas)
☒	Single power level with corresponding antenna(s).
☐	Multiple power level and corresponding antenna(s).

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	External	Dipole	3
2	Integral	PCB	4.42
3	External	PIFA	3.3

Note 1: EUT can match with above antennas for using. Higher gain in each type of antenna was used to perform the worst configuration and result of that was recorded as the final test result.

Note 2: IEEE 802.11a/n only includes 1TX and Port1 for emission.

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☒ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐ Operated normally mode for worst duty cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 100% - IEEE 802.11a	0
☒ 100% - IEEE 802.11n (HT20)	0

1.1.5 EUT Operational Condition

Supply Voltage	☐ AC mains	☒ DC	
Type of DC Source	☒ From Host System	☐ External AC adapter	☐ Li-ion Battery
Test Voltage	☒ Vnom (3.3 V)	☒ Vmax (3.6 V)	☒ Vmin (3 V)
Test Climatic	☒ Tnom (20°C)	☒ Tmax (50°C)	☒ Tmin (-20°C)

1.2 Support Equipment

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5540	DoC
2	Adapter (For notebook)	DELL	HA65NM130	DoC
3	Test Fixture	-	-	-

Note: The Test Fixture provided by Customer.

Support Equipment - AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5540	DoC
2	Adapter (For notebook)	DELL	HA65NM130	DoC
3	Test Fixture	-	-	-

Note: The Test Fixture provided by Customer.

Support Equipment - Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5530	DoC
2	Adapter (For notebook)	DELL	HA65NM130	DoC
3	Test Fixture	-	-	-

Note: The Test Fixture provided by Customer.

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v01
- ♦ FCC-14-30A1-UNII

1.4 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973	
Test site registered number [636805] with FCC.			
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Zeus	23°C / 56%
RF Conducted	TH01-HY	Leo	23.4°C / 63.1%
Radiated Emission for LF	03CH02-HY	Daniel	23.8°C / 56.1%
Radiated Emission for HF		Joe	26.8°C / 61%
Test Site Registration Number			
FCC			
636805			

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 26dB bandwidth		±0.5%
RF output power, conducted		±0.1 dB
Power density, conducted		±0.5 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±5 %
DC and low frequency voltages		±0.9%
Time		±1.4 %
Duty Cycle		±0.5 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11a	1	6-54Mbps	6 Mbps
HT20	1	MCS 0-7	MCS 0

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (5150-5250MHz band)				
Test Software Version	QCOM_V1.0 10.12.21.15.08			
Modulation Mode	N _{TX}	Test Frequency (MHz)		
		NCB: 20MHz		
		5180	5200	5240
11a	1	14	14	6
HT20	1	13	13	5

The Worst Case Power Setting Parameter(5725-5850MHz band)				
Test Software Version	QCOM_V1.0 10.12.21.15.08			
Modulation Mode	N _{TX}	Test Frequency (MHz)		
		NCB: 20MHz		
		5745	5785	5825
11a	1	10	12	12
HT20	1	9	12	9


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	EUT with Dipole Antenna
2	EUT with PCB Antenna
3	EUT with PIFA Antenna
Operating mode 1 is the worst case and it is recorded in this test report.	


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Peak Power Spectral Density, Emission Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	☐ EUT will be placed in fixed position. ☒ EUT will be placed in mobile position and operating multiple positions. ☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes.		
Operating Mode	Operating Mode Description		
Radiated Emissions Below 1GHz	☒ 1. EUT with Dipole Antenna ☒ 2. EUT with PCB Antenna ☒ 3. EUT with PIFA Antenna Operating mode 3 is the worst case and it is recorded in this test report.		
Radiated Emissions Above 1GHz	☒ 1. EUT with Dipole Antenna ☒ 2. EUT with PCB Antenna ☒ 3. EUT with PIFA Antenna		
Modulation Mode	11a, HT20		
Orthogonal Planes of EUT	X Plane 	Y Plane 	Z Plane 
Worst Planes of EUT		V	


2.4 Test Setup Diagram

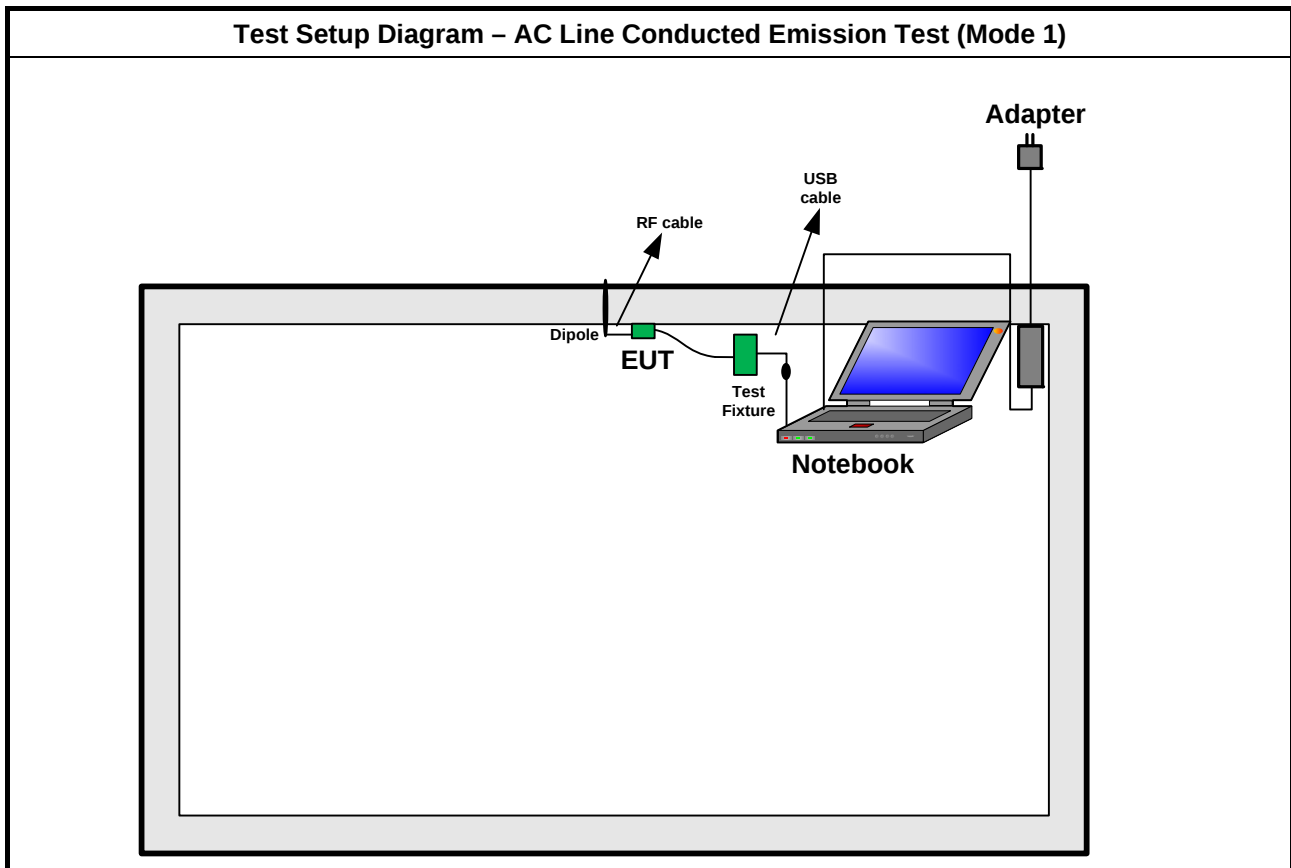


Test Setup Diagram - Radiated Test Below 1GHz (Mode 3)

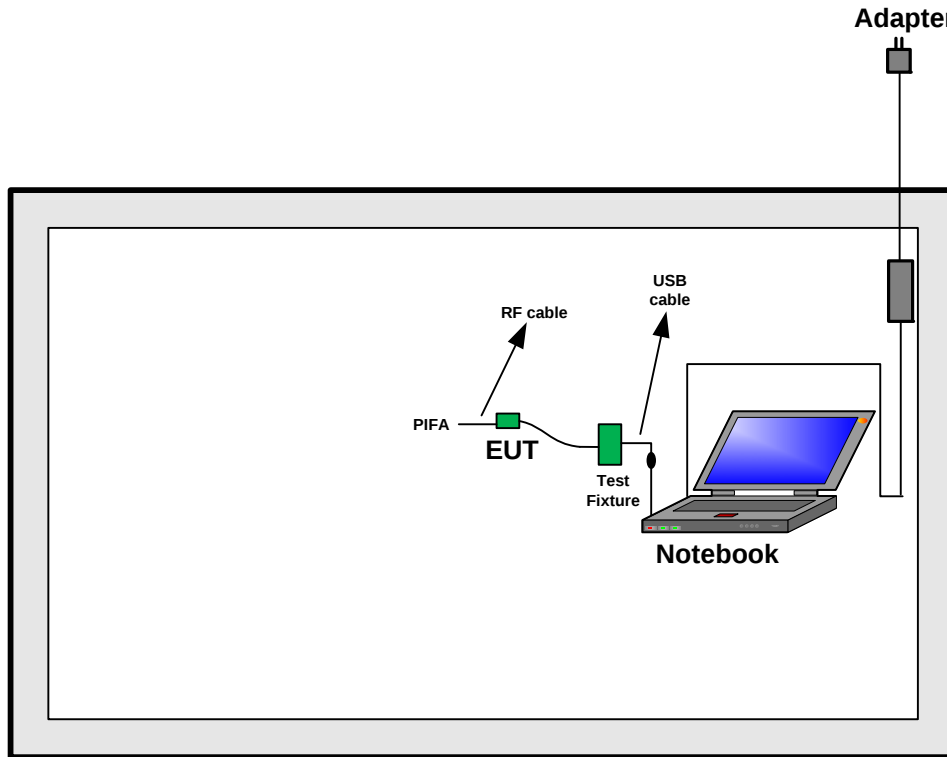


Test Setup Diagram - Radiated Test Above 1GHz (Mode 1)

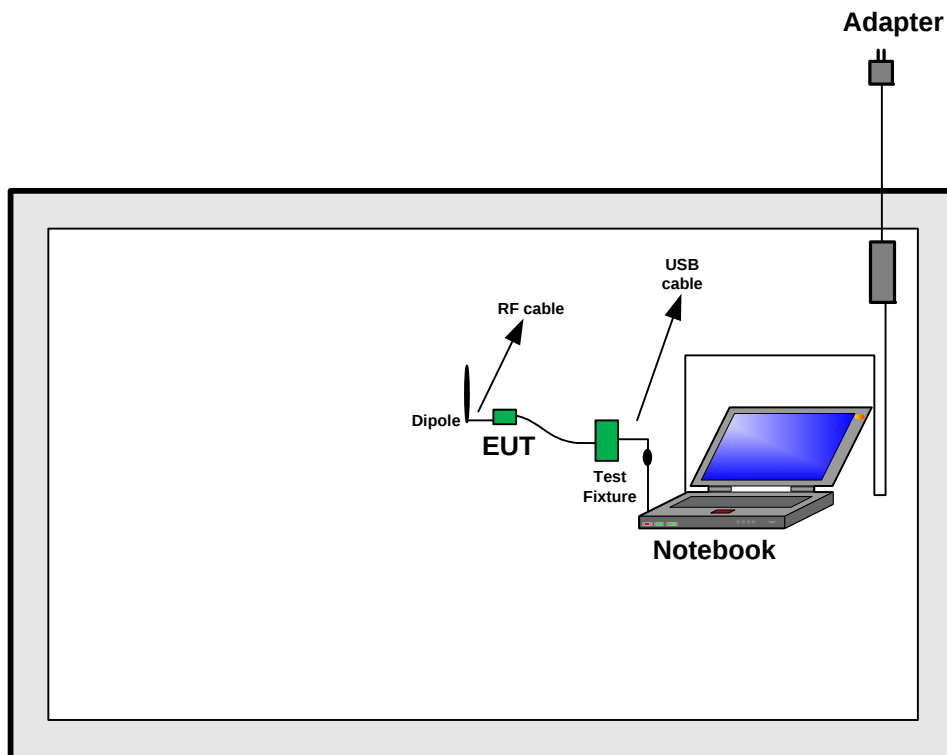

Test Setup Diagram - Radiated Test Above 1GHz (Mode 2)

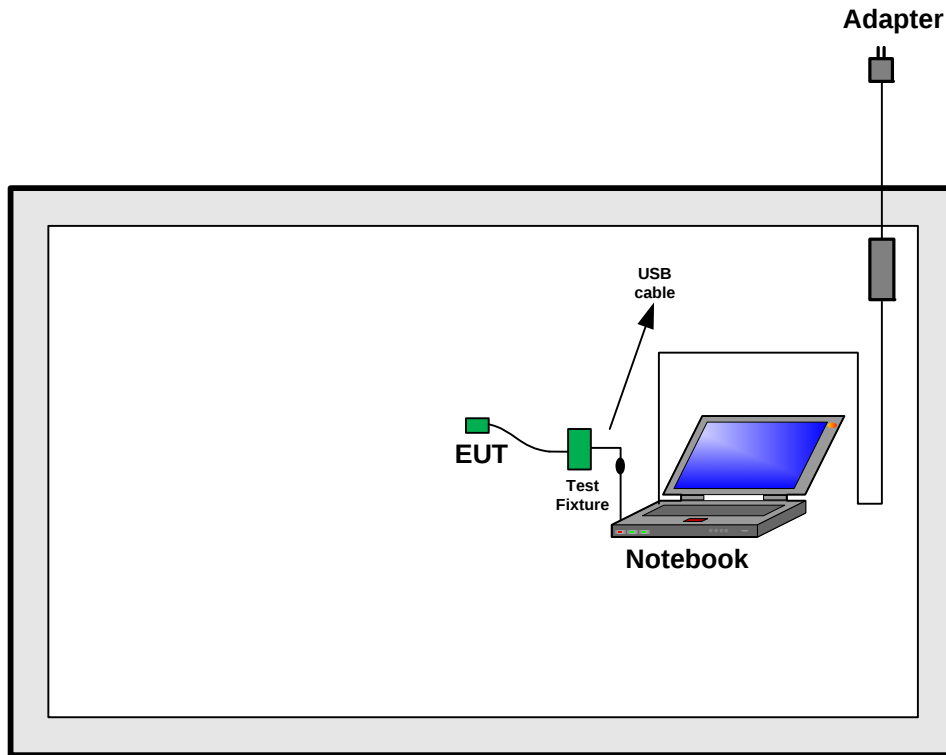

Test Setup Diagram - Radiated Test Above 1GHz (Mode 3)

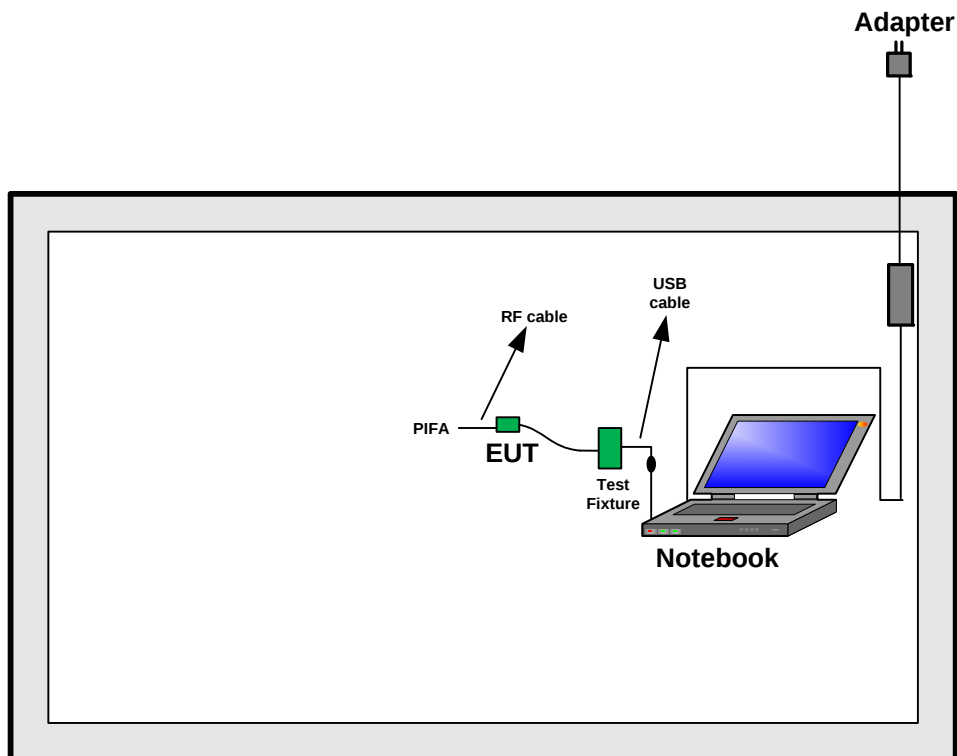

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

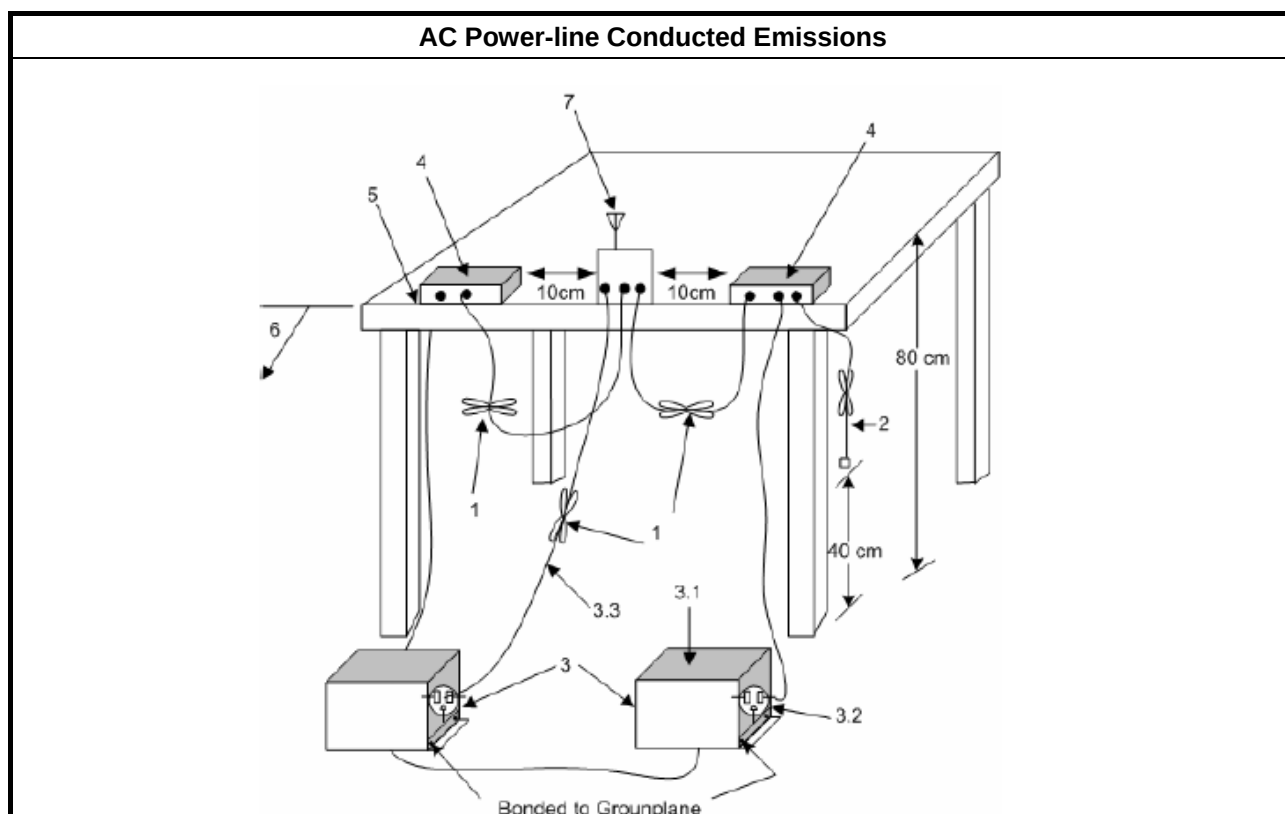


3.1.5 Test Result of AC Power-line Conducted Emissions

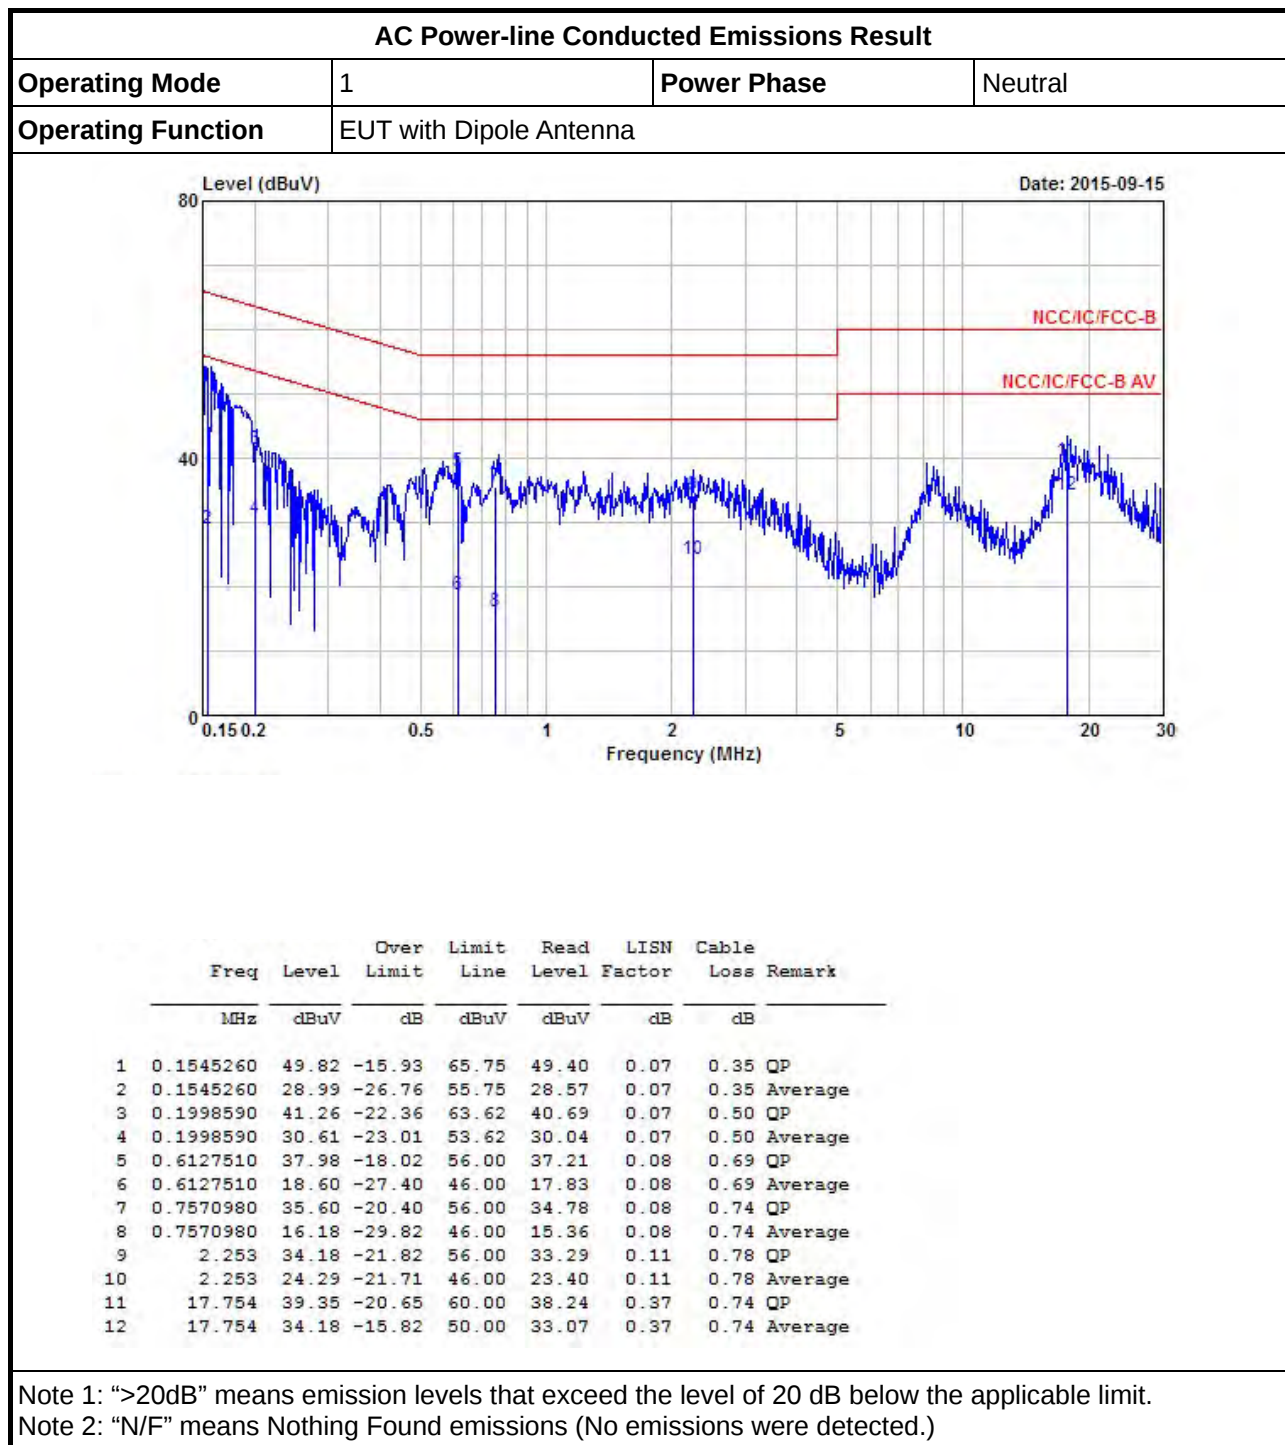

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	EUT with Dipole Antenna		

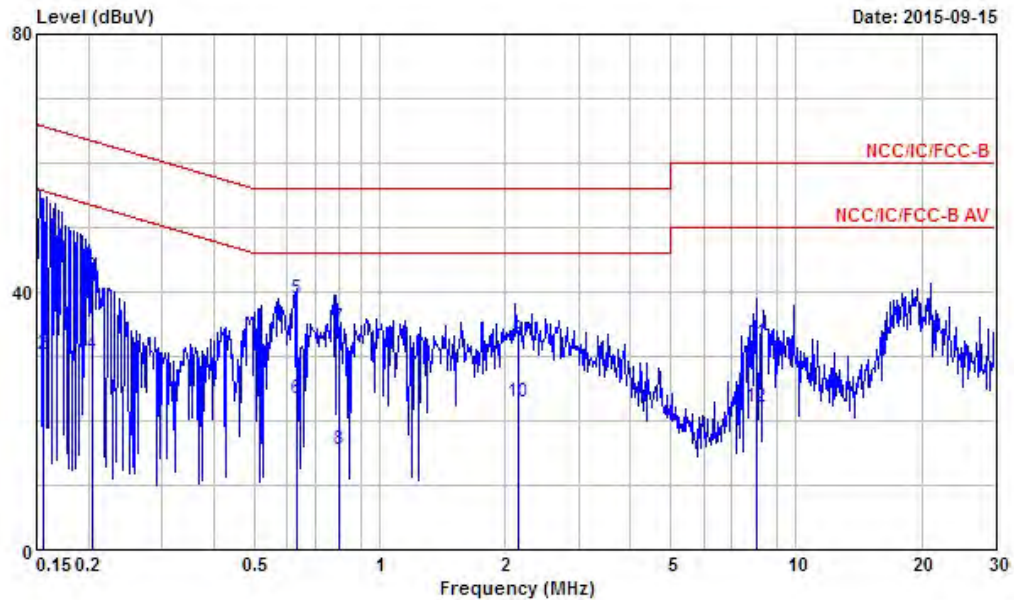

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1556030	51.14	-14.56	65.70	50.74	0.05	0.35	QP
2	0.1556030	30.16	-25.54	55.70	29.76	0.05	0.35	Average
3	0.2044310	42.24	-21.19	63.43	41.68	0.06	0.50	QP
4	0.2044310	30.16	-23.27	53.43	29.60	0.06	0.50	Average
5	0.6339790	38.91	-17.09	56.00	38.13	0.08	0.70	QP
6	0.6339790	23.30	-22.70	46.00	22.52	0.08	0.70	Average
7	0.7992140	34.47	-21.53	56.00	33.64	0.08	0.75	QP
8	0.7992140	15.41	-30.59	46.00	14.58	0.08	0.75	Average
9	2.146	32.74	-23.26	56.00	31.85	0.10	0.79	QP
10	2.146	22.86	-23.14	46.00	21.97	0.10	0.79	Average
11	8.037	31.99	-28.01	60.00	31.00	0.21	0.78	QP
12	8.037	22.03	-27.97	50.00	21.04	0.21	0.78	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☐	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 789033 D02 v01, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.6 for bandwidth testing.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit.
☐	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

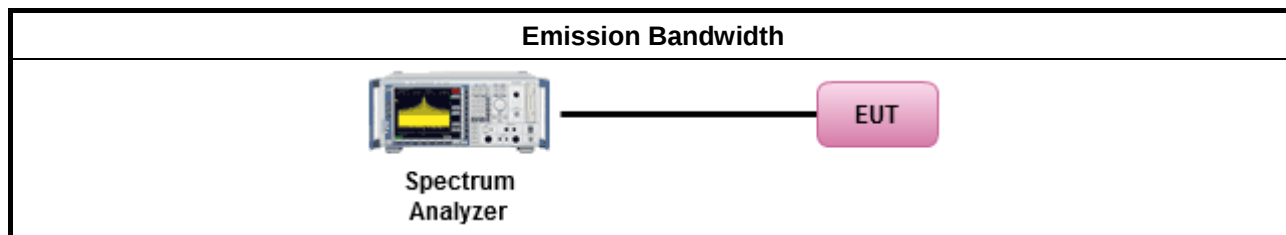


3.2.5 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result (5150-5250MHz band)				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	26dB Bandwidth
11a	1	5180	18.84	33.52
11a	1	5200	17.99	33.35
11a	1	5240	16.64	19.67
HT20	1	5180	19.16	35.37
HT20	1	5200	18.14	37.05
HT20	1	5240	17.71	19.85
Result			Complied	


UNII Emission Bandwidth Result (5725-5850MHz band)				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	6dB Bandwidth
11a	1	5745	16.74	16.50
11a	1	5785	17.36	16.48
11a	1	5825	17.12	16.51
HT20	1	5745	17.73	17.68
HT20	1	5785	18.41	17.79
HT20	1	5825	17.75	17.68
Limit			N/A	≥500 kHz
Result			Complied	

5150-5250MHz - Worst Emission 26Bandwidth Plots

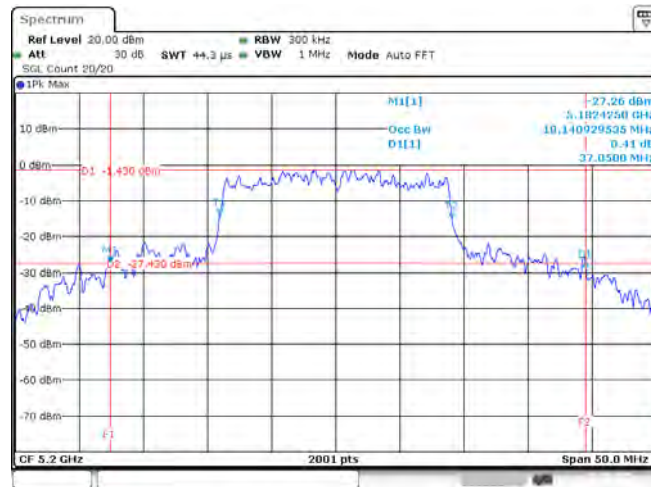


Date: 15.SEP.2015 05:29:17

5725-5850MHz - Worst Emission 6Bandwidth Plots

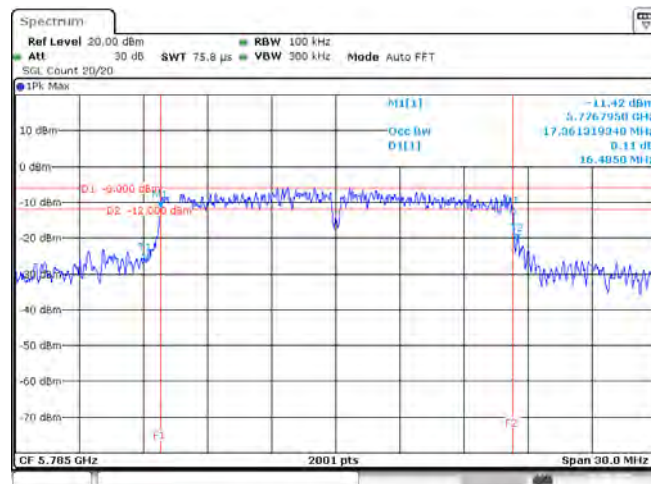


Date: 15.SEP.2015 05:49:18

5240MHz - Emission Bandwidth Plots - 11a

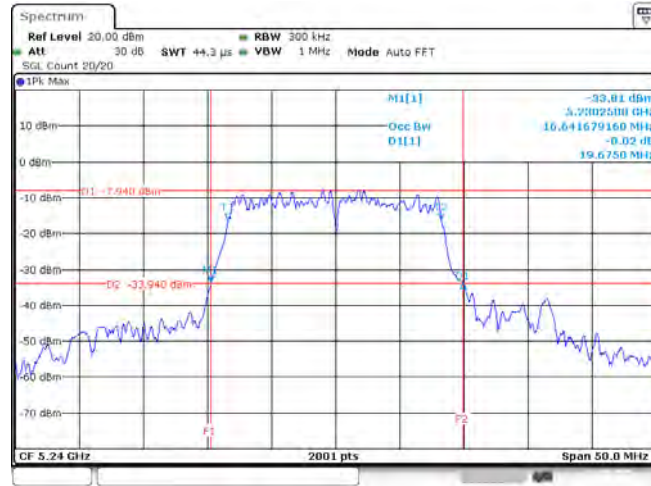

Date: 14.OCT.2015 15:19:52

5240MHz - Emission Bandwidth Plots - HT20

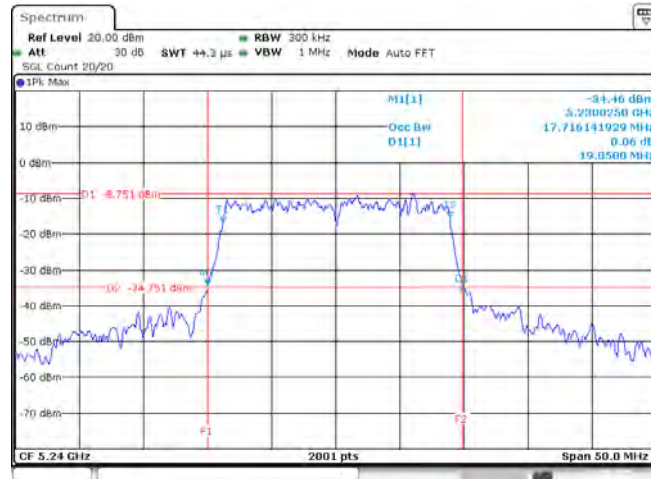

Date: 14.OCT.2015 15:16:04

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125 mW [21dBm]
☐	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
☐	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
☒	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.725-5.85 GHz band:	
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☒	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Maximum Conducted Output Power
	[duty cycle $\geq$ 98% or external video / power trigger]
☒	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02 v01, clause E Method PM (using an RF average power meter).
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.3.4 Test Setup

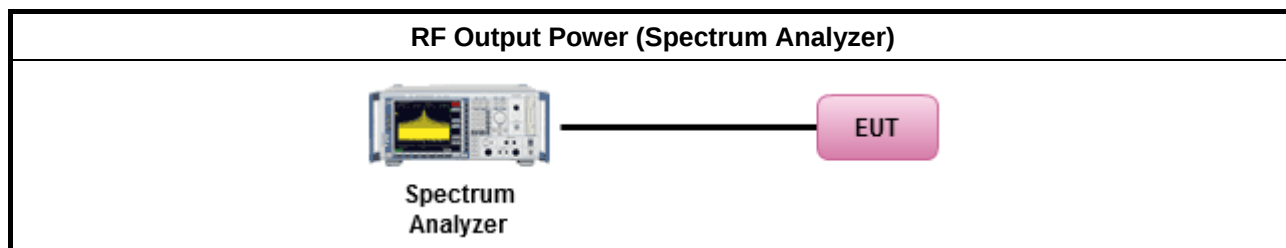


3.3.5 Test Result of Maximum Conducted Output Power


Maximum Conducted Output Power (5150-5250MHz band)						
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	DG (dBi)	EIRP Power
11a	1	5180	11.71	24.00	4.42	16.13
11a	1	5200	12.27	24.00	4.42	16.69
11a	1	5240	4.85	24.00	4.42	9.27
HT20	1	5180	11.20	24.00	4.42	15.62
HT20	1	5200	11.17	24.00	4.42	15.59
HT20	1	5240	3.68	24.00	4.42	8.10
Result			Complied			

Maximum Conducted Output Power (5725-5850MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	DG (dBi)
11a	1	5745	7.95	30.00	4.42
11a	1	5785	10.85	30.00	4.42
11a	1	5825	10.47	30.00	4.42
HT20	1	5745	6.94	30.00	4.42
HT20	1	5785	10.88	30.00	4.42
HT20	1	5825	7.32	30.00	4.42
Result			Complied		

5150-5250MHz - Worst RF Output Power Plots

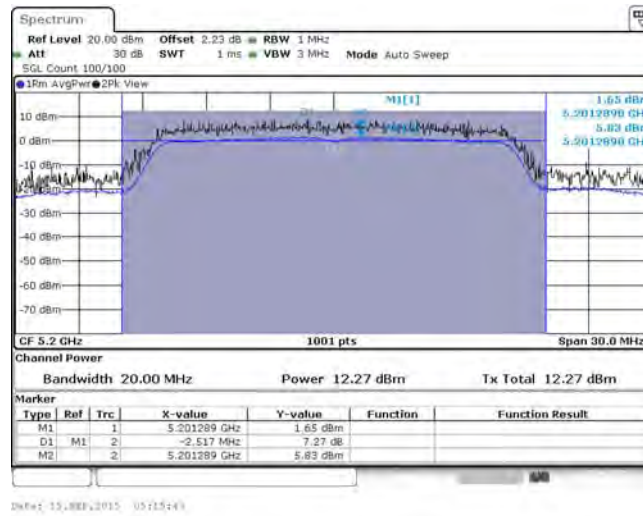

5725-5850MHz - Worst RF Output Power Plots

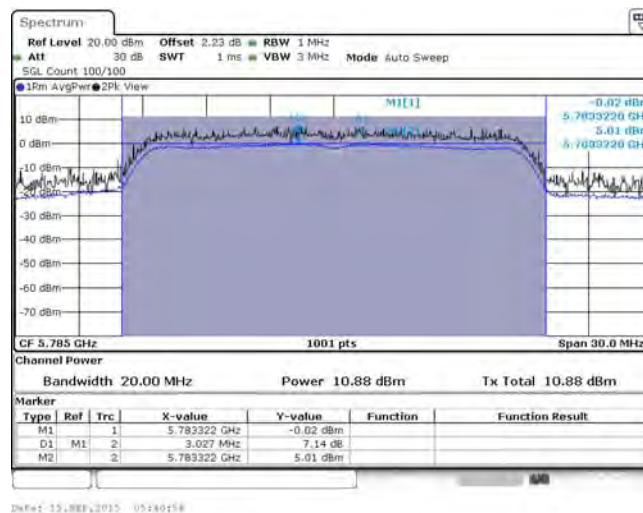

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☐	Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☐	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$.
☒	Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☐	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
☒	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
☒	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
☒	Refer as FCC KDB 789033 D02 v01, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle ≥ 98% or external video / power trigger]
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
☐	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
☐	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.



3.4.4 Test Setup

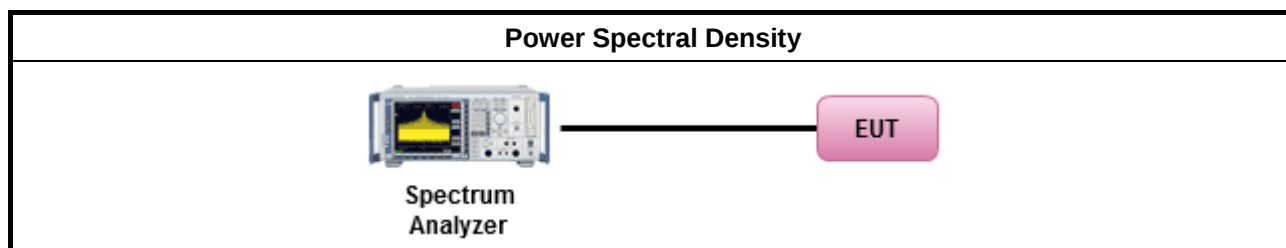

3.4.5 Test Result of Peak Power Spectral Density



Peak Power Spectral Density Result (5150-5250MHz band)				
Modulation Mode	N _{TX}	Freq. (MHz)	Peak Power Spectral Density (dBm)	PSD Limit
11a	1	5180	1.08	11.00
11a	1	5200	1.65	11.00
11a	1	5240	-5.78	11.00
HT20	1	5180	0.30	11.00
HT20	1	5200	0.35	11.00
HT20	1	5240	-6.99	11.00
Result			Complied	

Peak Power Spectral Density Result (5725-5850MHz band)				
Modulation Mode	N _{TX}	Freq. (MHz)	Peak Power Spectral Density (dBm)	PSD Limit (500kHz)
11a	1	5745	1.54	30.00
11a	1	5785	3.90	30.00
11a	1	5825	3.21	30.00
HT20	1	5745	0.95	30.00
HT20	1	5785	3.58	30.00
HT20	1	5825	1.11	30.00
Result			Complied	

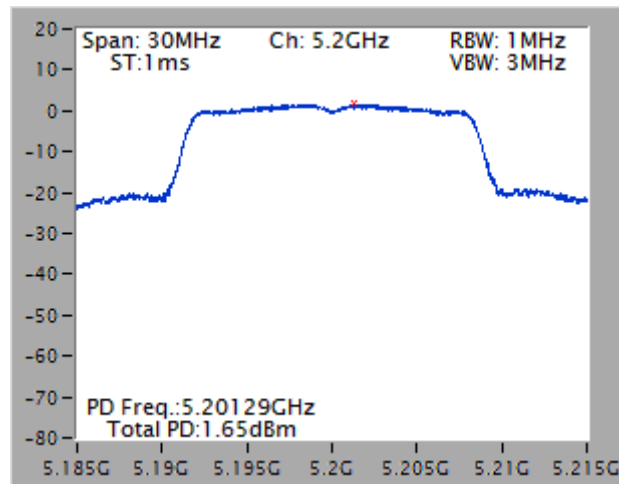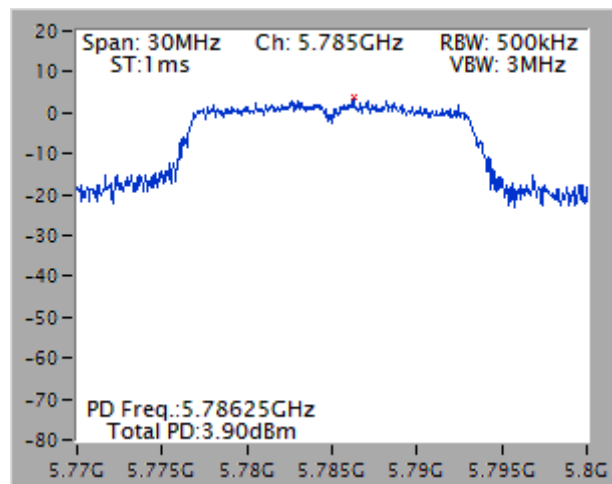5150-5250MHz - Worst Power Spectral Density Plots

5725-5850MHz - Worst Power Spectral Density Plots


3.5 Transmitter Bandedge Emissions

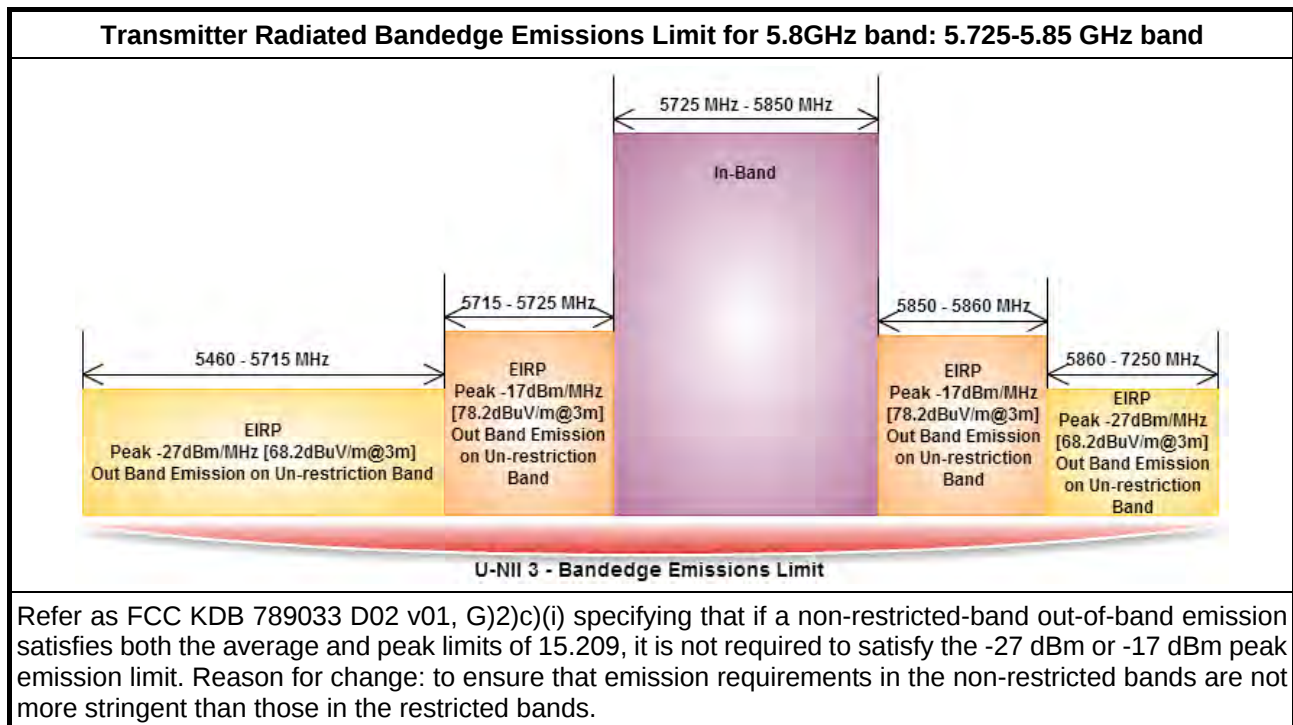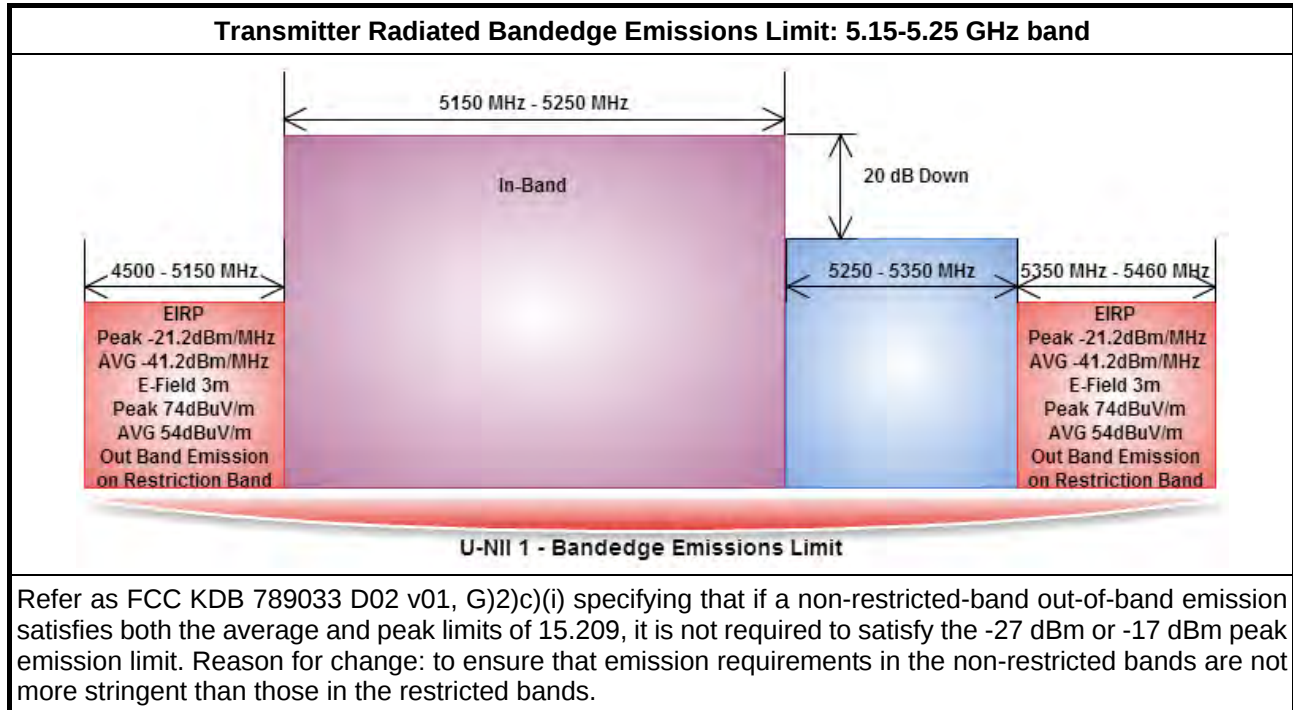3.5.1 Transmitter Radiated Bandedge Emissions Limit




3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☐	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
☐	☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band). ☐ Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.85 GHz band (higher-band).
☐	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., (e.g., IEEE 802.11ac VHT160)
☐	☐ Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band). ☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.85 GHz band (higher-band).
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033 D02 v01, clause H)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033 D02 v01, clause H)1) for unwanted emissions into restricted bands.
☒	Refer as FCC KDB 789033 D02 v01, H)6) Method AD (Trace Averaging).
☐	Refer as FCC KDB 789033 D02 v01, H)6) Method VB (Reduced VBW).
☐	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 789033 D02 v01, clause H)5) measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	Refer as FCC KDB 789033 D02 v01, clause H)3)d) for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
☒	Refer as ANSI C63.10, clause 6.10 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.6. Test distance is 3m.
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 3m, because the instrumentation noise floor is typically close to the radiated emission limit.

3.5.4 Test Setup

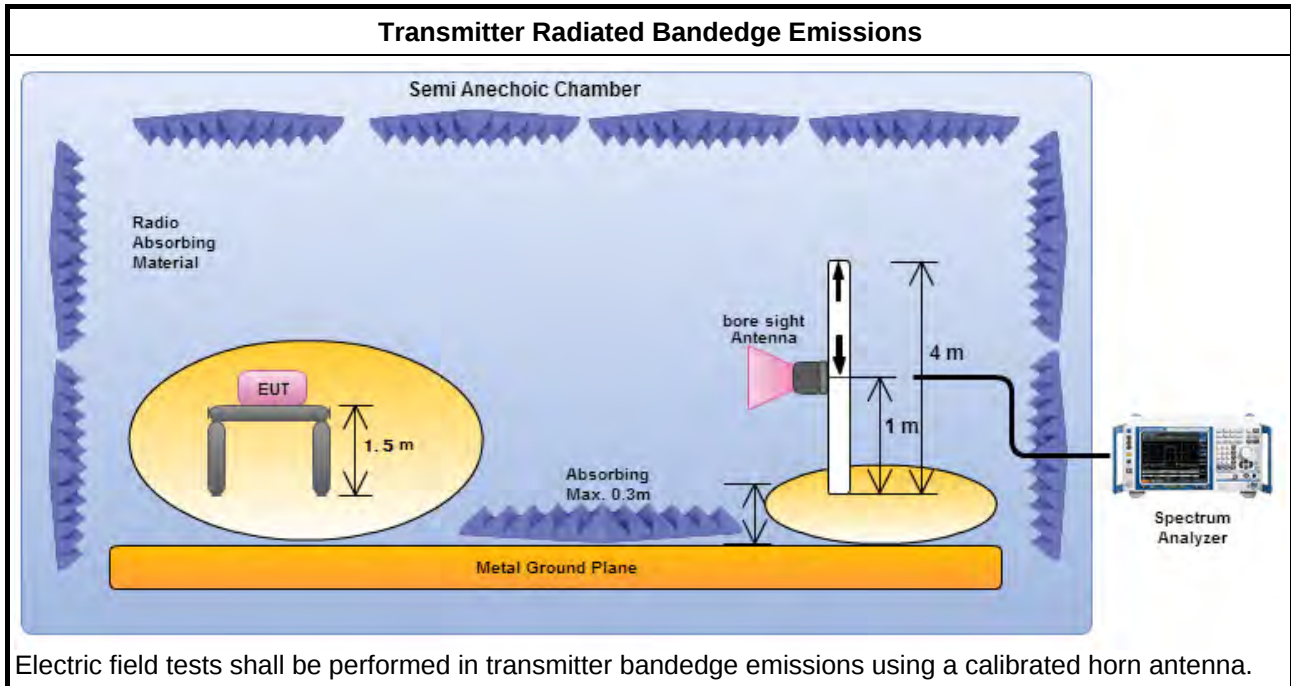

3.5.5 Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna) – Dipole Antenna										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5180	3	5147.800	71.56	74	5150.000	48.83	54	V
11a	1	5240	3	5149.800	59.06	74	5106.600	45.27	54	V
HT20	1	5180	3	5147.800	71.09	74	5149.900	50.31	54	V
HT20	1	5240	3	5141.400	59.41	74	5357.400	45.85	54	V

Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna) – PCB Antenna										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5180	3	5148.800	64.68	74	5149.900	46.51	54	H
11a	1	5240	3	5358.600	58.23	74	5382.000	45.18	54	H
HT20	1	5180	3	5147.600	68.60	74	5149.900	48.77	54	H
HT20	1	5240	3	5373.600	58.52	74	5361.000	44.85	54	H

Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna) –PIFA Antenna										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5180	3	5147.600	68.53	74	5149.900	47.06	54	V
11a	1	5240	3	5128.200	58.95	74	5125.200	45.05	54	V
HT20	1	5180	3	5149.600	66.99	74	5149.900	47.49	54	V
HT20	1	5240	3	5376.000	58.14	74	5104.200	44.82	54	V

Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5725-5850MHz Transmitter Radiated Bandedge (with Antenna) – Dipole Antenna

Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
11a	1	5745	3	5713.210	66.54	68.2	V
11a	1	5825	3	5869.000	60.25	68.2	V
HT20	1	5745	3	5724.550	77.05	78.2	V
HT20	1	5825	3	5860.990	66.92	68.2	V

Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5725-5850MHz Transmitter Radiated Bandedge (with Antenna) –PCB Antenna

Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
11a	1	5745	3	5724.970	77.13	78.2	H
11a	1	5825	3	5860.360	66.41	68.2	H
HT20	1	5745	3	5724.550	76.68	78.2	H
HT20	1	5825	3	5860.360	66.63	68.2	H

Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5725-5850MHz Transmitter Radiated Bandedge (with Antenna) –PIFA Antenna

Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
11a	1	5745	3	5712.580	66.23	68.2	V
11a	1	5825	3	5860.150	65.45	68.2	V
HT20	1	5745	3	5724.550	77.12	78.2	V
HT20	1	5825	3	5861.410	66.98	68.2	V

Note 1: Measurement worst emissions of receive antenna polarization.

3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033 D02 v01, clause G)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033 D02 v01, clause G)1) for unwanted emissions into restricted bands.
☒	Refer as FCC KDB 789033 D02 v01, G)6) Method AD (Trace Averaging).
☐	Refer as FCC KDB 789033 D02 v01, G)6) Method VB (Reduced VBW).
☐	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 789033 D02 v01, clause G)5) measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. For 1 GHz to 5 GHz, test distance is 3m; For 5 GHz to 40 GHz, test distance is 3m.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.6.4 Test Setup

Transmitter Radiated Unwanted Emissions Below 1GHz

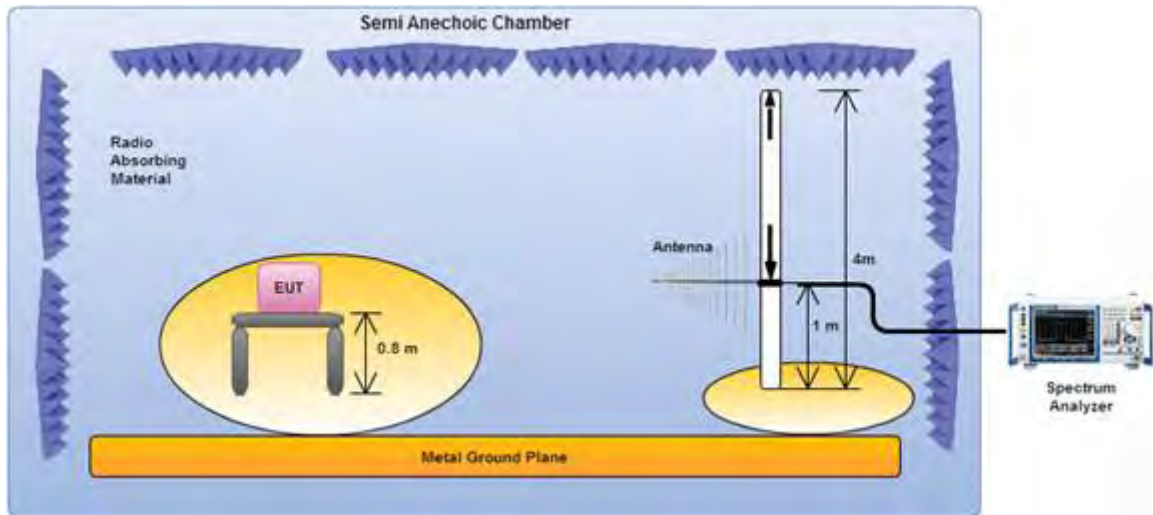

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

Transmitter Radiated Unwanted Emissions Above 1GHz

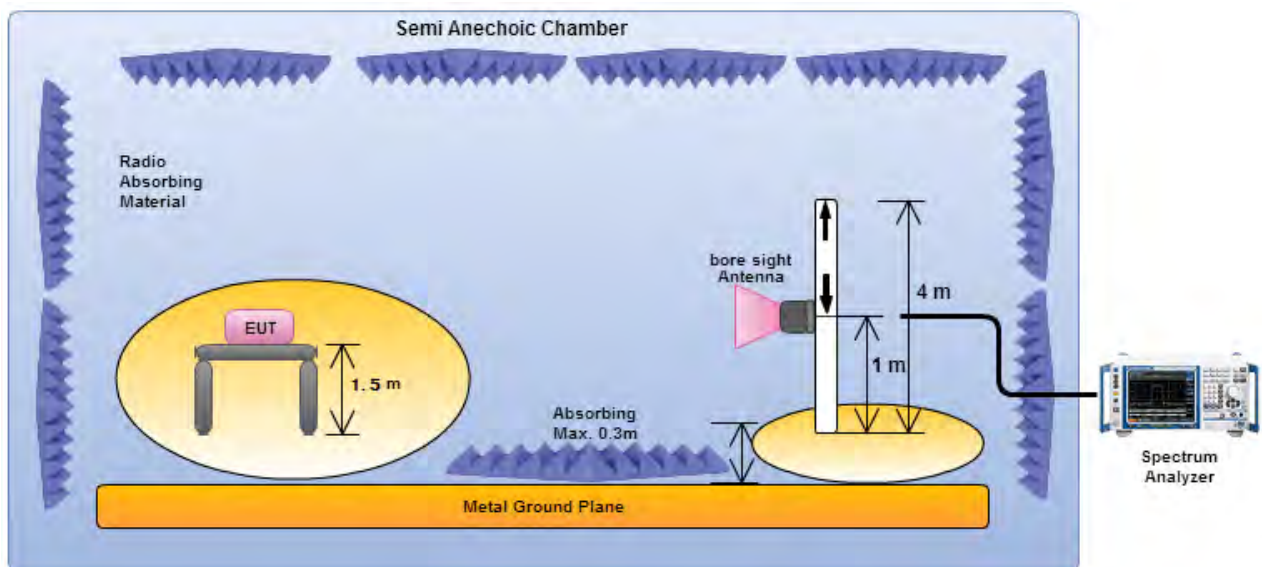


Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions-with Antenna (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

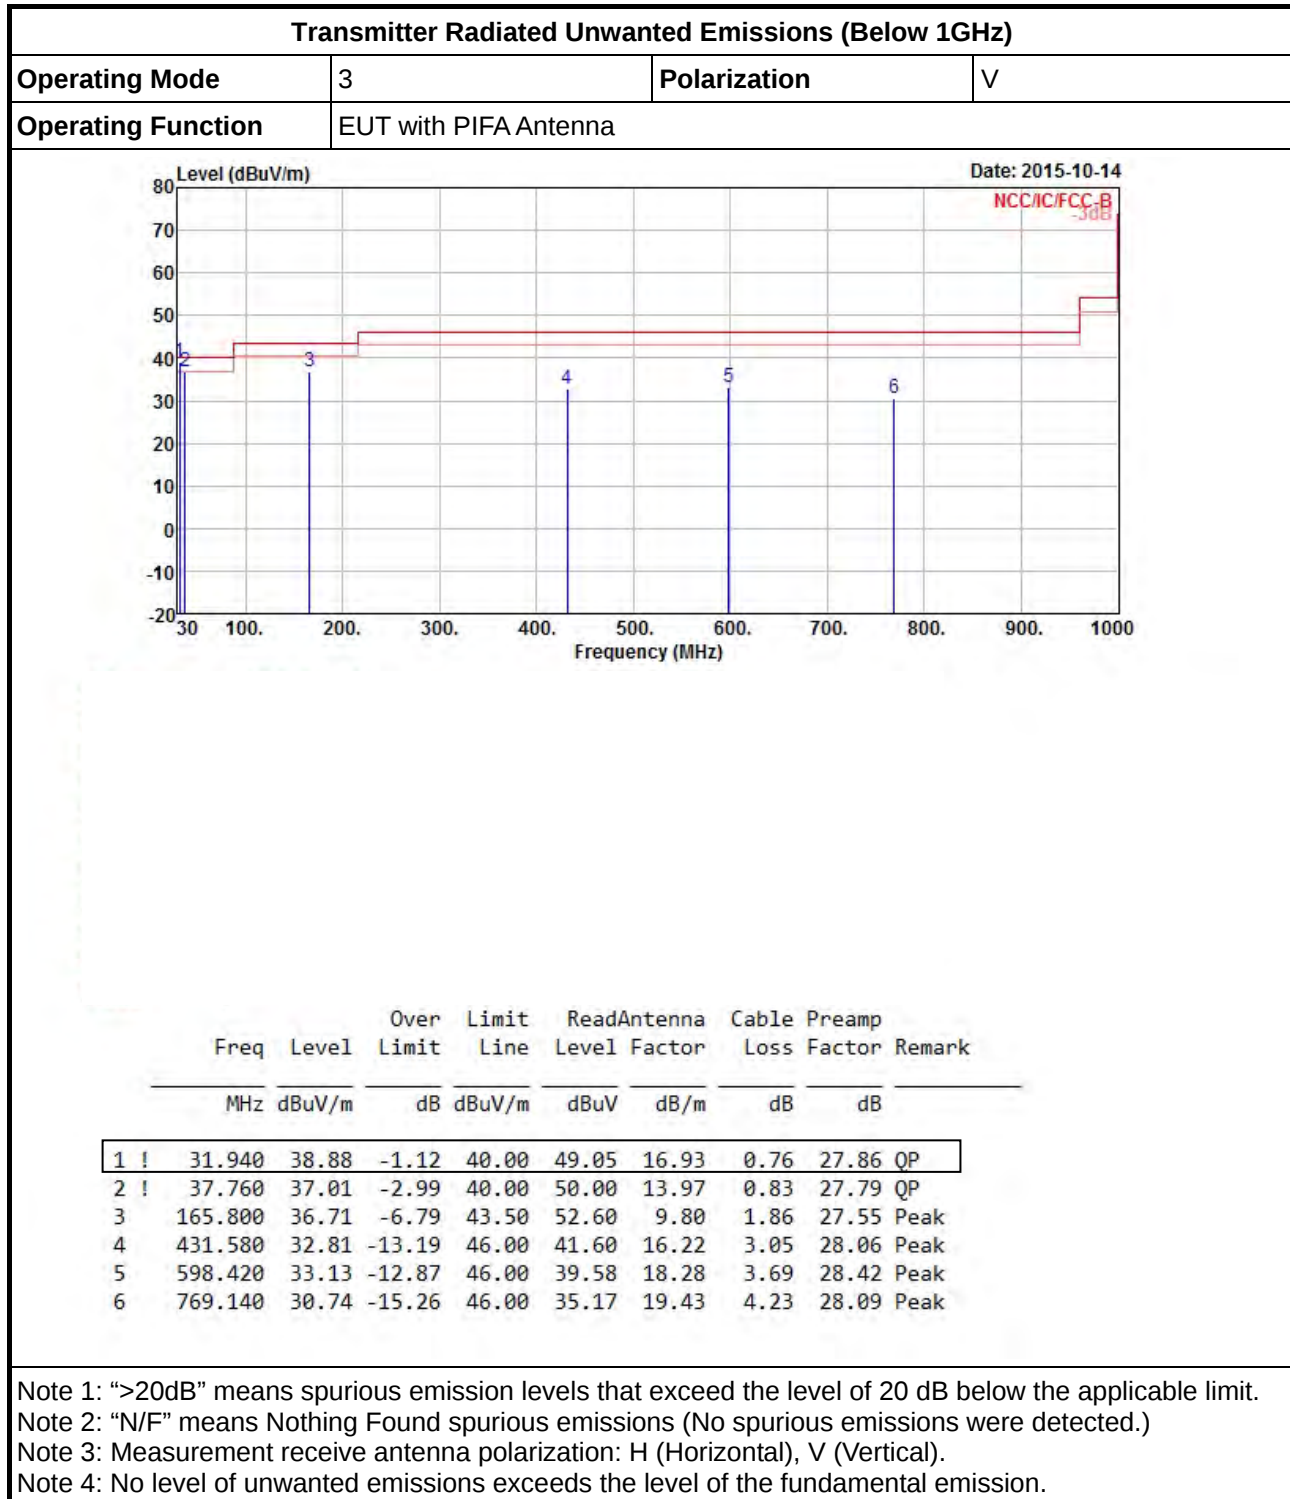

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	3	Polarization	H
Operating Function	EUT with PIFA Antenna		

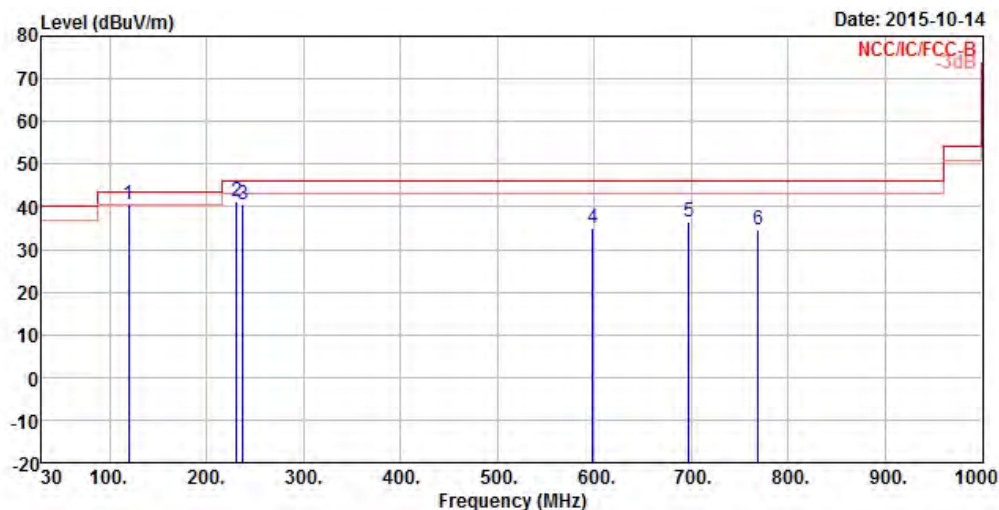

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	119.240	40.35	-3.15	43.50	54.70	11.83	1.52	27.70	Peak
2	230.790	41.21	-4.79	46.00	56.41	9.90	2.22	27.32	QP
3	237.580	40.44	-5.56	46.00	54.62	10.85	2.26	27.29	QP
4	598.420	35.14	-10.86	46.00	41.59	18.28	3.69	28.42	Peak
5	697.360	36.52	-9.48	46.00	42.27	18.59	4.00	28.34	Peak
6	769.140	34.47	-11.53	46.00	38.90	19.43	4.23	28.09	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz-- Dipole Antenna

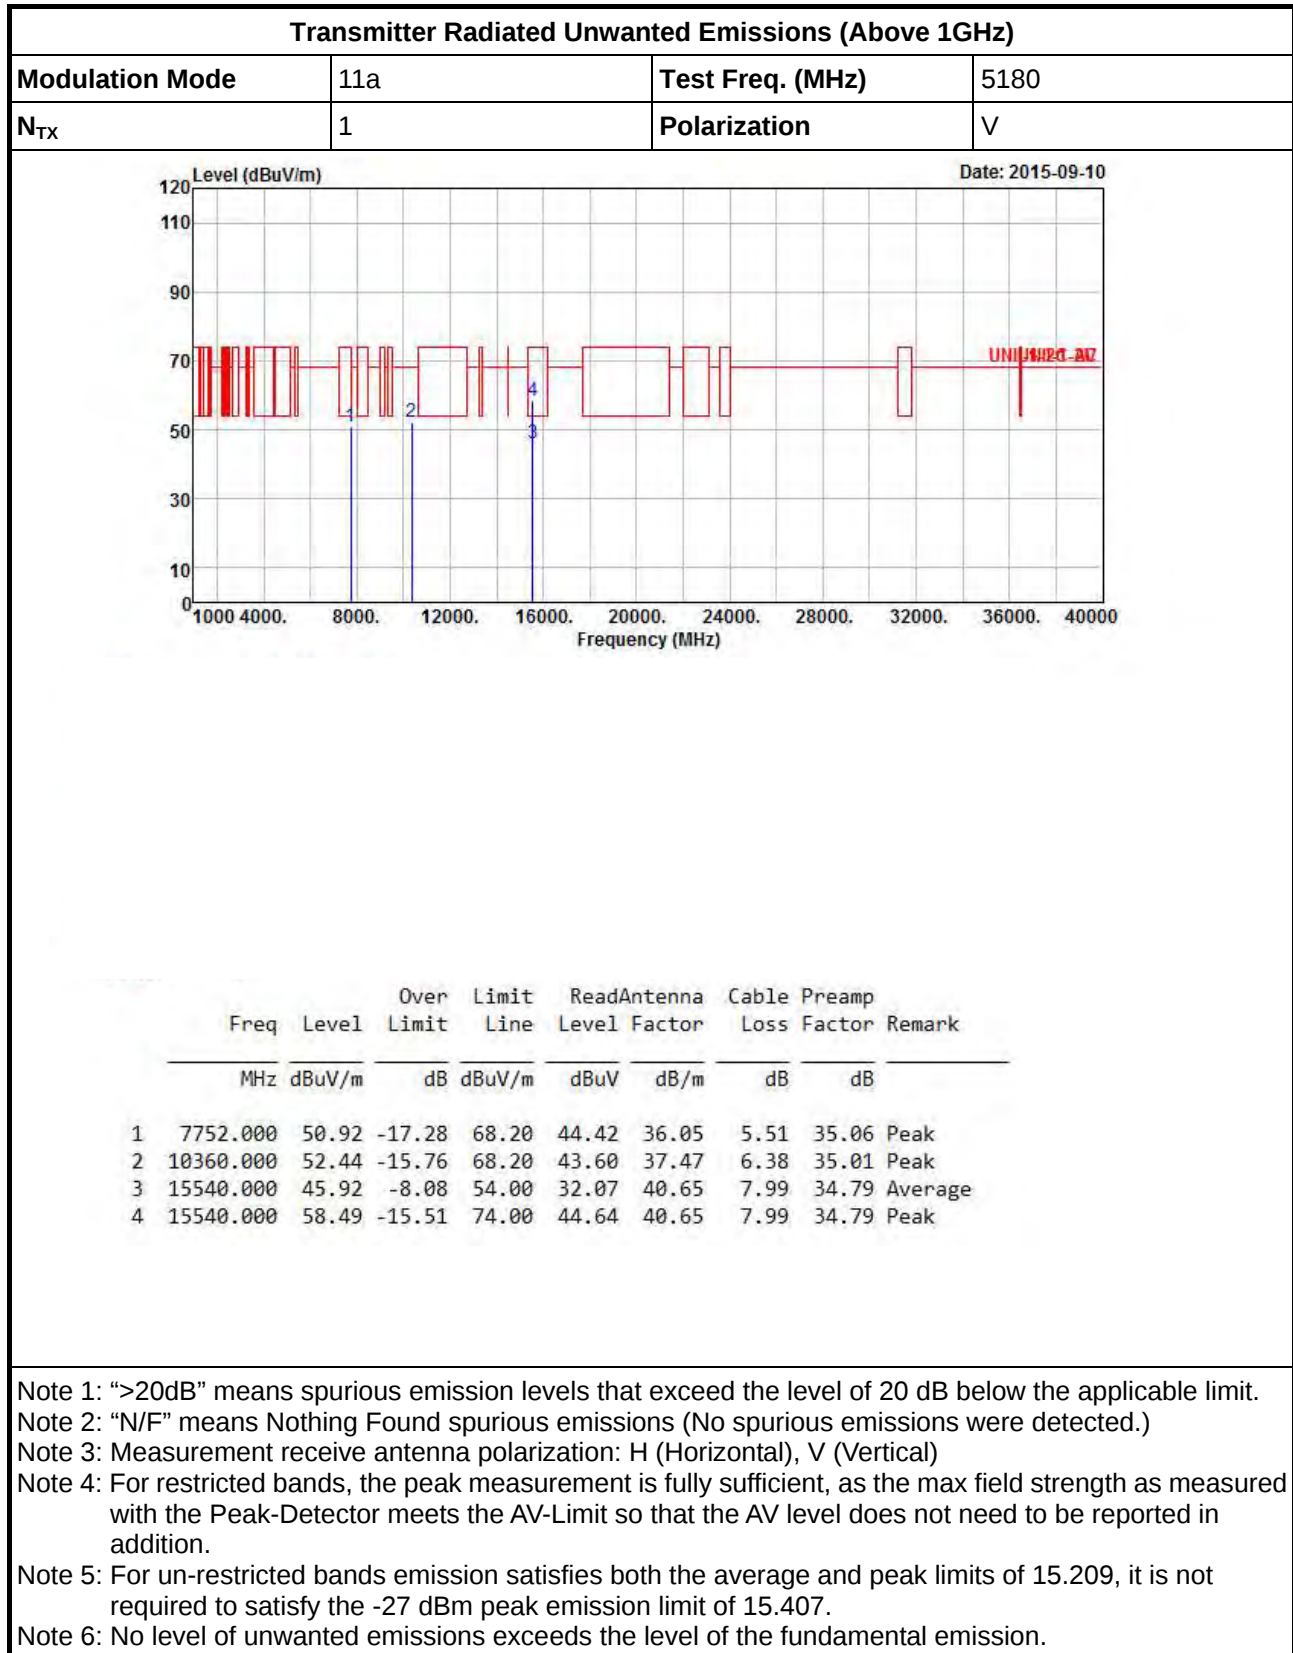

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

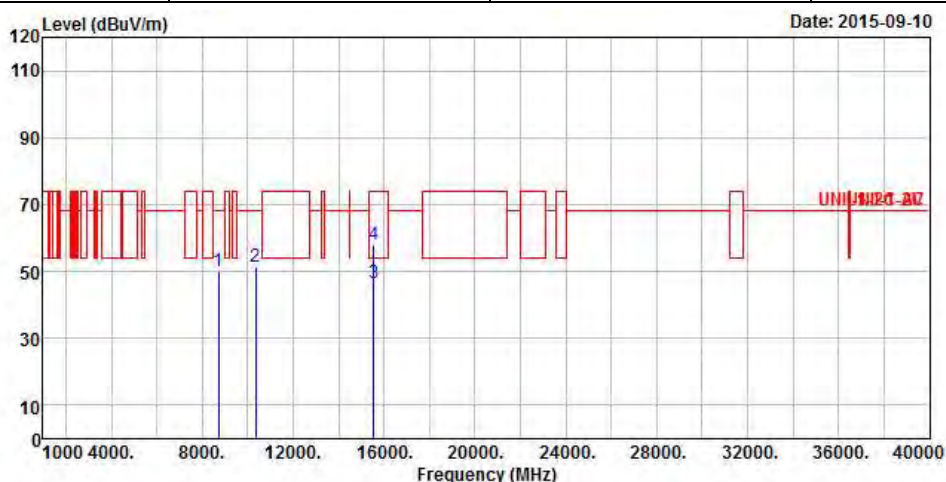

	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Remark
					dBuV	dB/m	dB	dB
1	8724.000	50.18	-18.02	68.20	43.24	36.34	5.70	35.10 Peak
2	10360.000	51.55	-16.65	68.20	42.71	37.47	6.38	35.01 Peak
3	15540.000	46.29	-7.71	54.00	32.44	40.65	7.99	34.79 Average
4	15540.000	58.06	-15.94	74.00	44.21	40.65	7.99	34.79 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

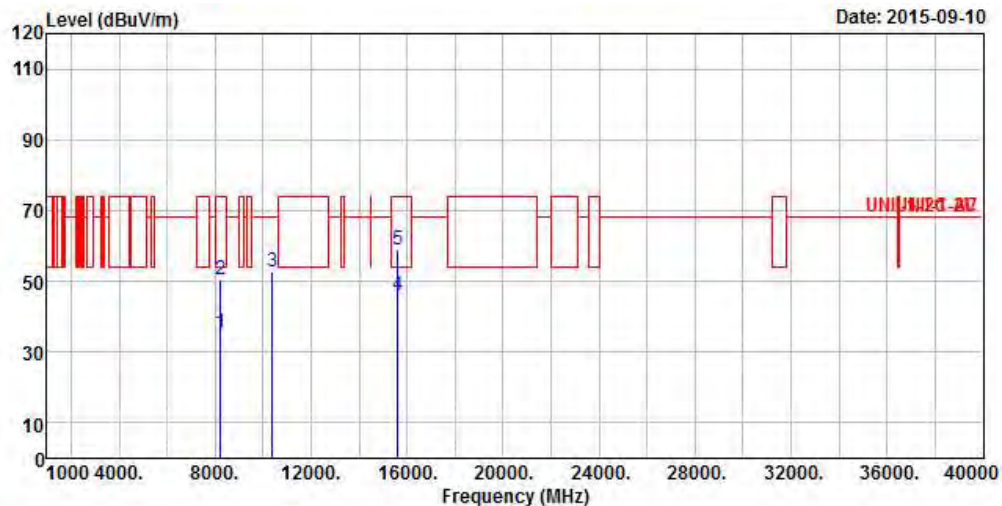

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8238.000	35.48	-18.52	54.00	28.99	36.20	5.39	35.10	Average
2	8238.000	50.37	-23.63	74.00	43.88	36.20	5.39	35.10	Peak
3	10400.000	52.48	-15.72	68.20	43.60	37.50	6.35	34.97	Peak
4	15600.000	45.97	-8.03	54.00	32.14	40.74	7.96	34.87	Average
5	15600.000	58.72	-15.28	74.00	44.89	40.74	7.96	34.87	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

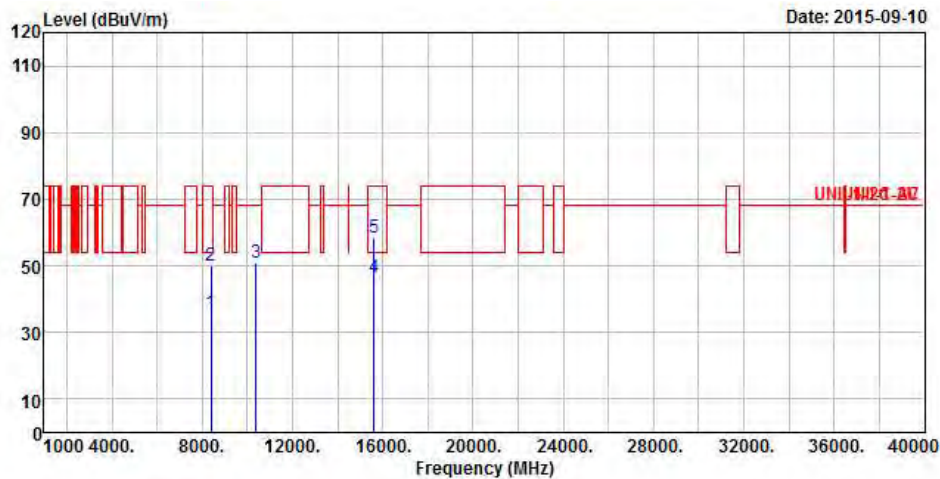

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8400.000	36.01	-17.99	54.00	29.39	36.26	5.44	35.08 Average
2	8400.000	50.01	-23.99	74.00	43.39	36.26	5.44	35.08 Peak
3	10400.000	51.02	-17.18	68.20	42.14	37.50	6.35	34.97 Peak
4	15600.000	46.33	-7.67	54.00	32.50	40.74	7.96	34.87 Average
5	15600.000	58.54	-15.46	74.00	44.71	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

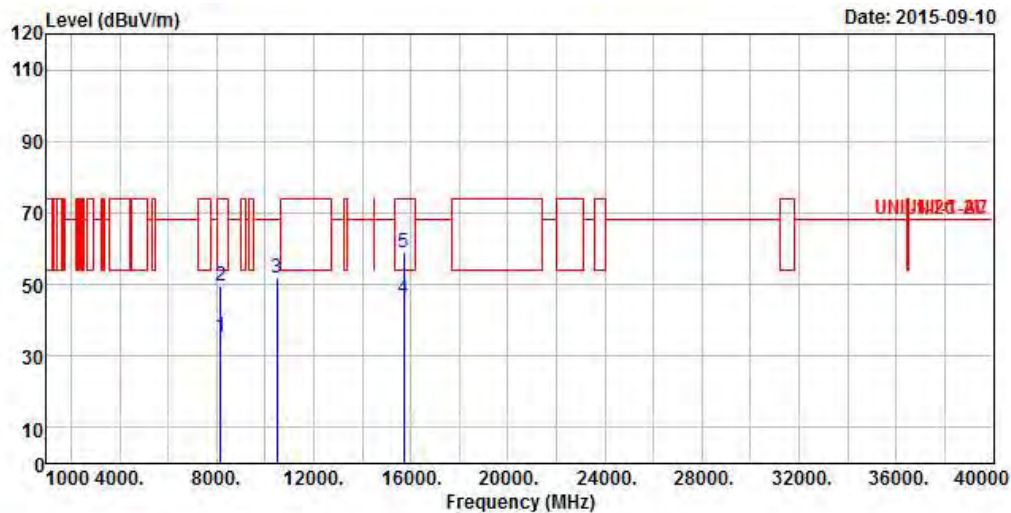

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8166.000	35.48	-18.52	54.00	29.05	36.17	5.37	35.11 Average
2	8166.000	49.81	-24.19	74.00	43.38	36.17	5.37	35.11 Peak
3	10480.000	51.94	-16.26	68.20	42.96	37.58	6.30	34.90 Peak
4	15720.000	46.13	-7.87	54.00	32.35	40.91	7.86	34.99 Average
5	15720.000	58.96	-15.04	74.00	45.18	40.91	7.86	34.99 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

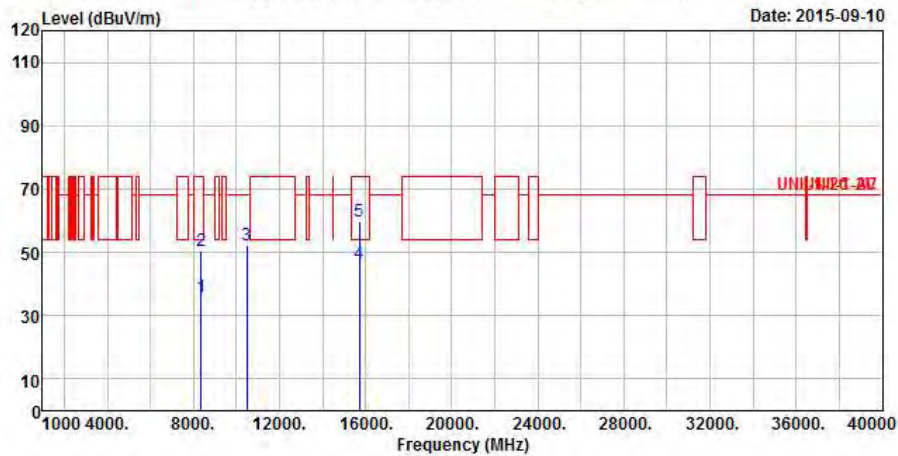

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8364.000	35.90	-18.10	54.00	29.31	36.24	5.43	35.08 Average
2	8364.000	50.63	-23.37	74.00	44.04	36.24	5.43	35.08 Peak
3	10480.000	52.07	-16.13	68.20	43.09	37.58	6.30	34.90 Peak
4	15720.000	46.37	-7.63	54.00	32.59	40.91	7.86	34.99 Average
5	15720.000	59.74	-14.26	74.00	45.96	40.91	7.86	34.99 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	V

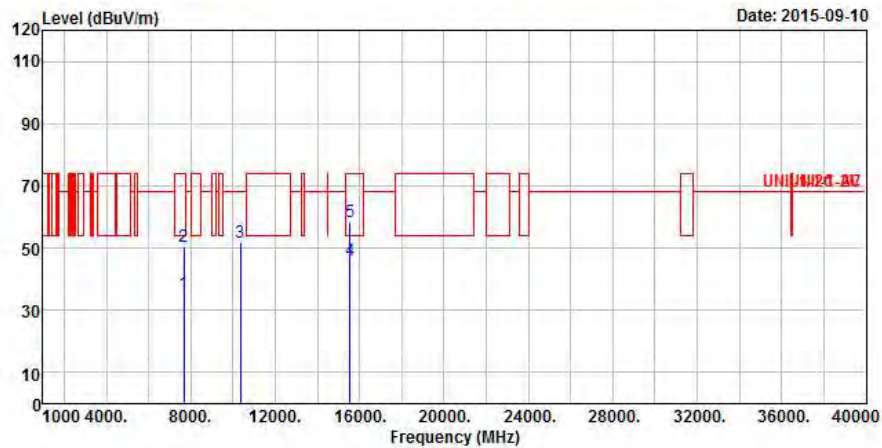

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7680.000	35.43	-18.57	54.00	28.85	36.04	5.58	35.04	Average
2	7680.000	50.53	-23.47	74.00	43.95	36.04	5.58	35.04	Peak
3	10360.000	51.71	-16.49	68.20	42.87	37.47	6.38	35.01	Peak
4	15540.000	45.98	-8.02	54.00	32.13	40.65	7.99	34.79	Average
5	15540.000	58.47	-15.53	74.00	44.62	40.65	7.99	34.79	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N _{TX}	1	Polarization	H

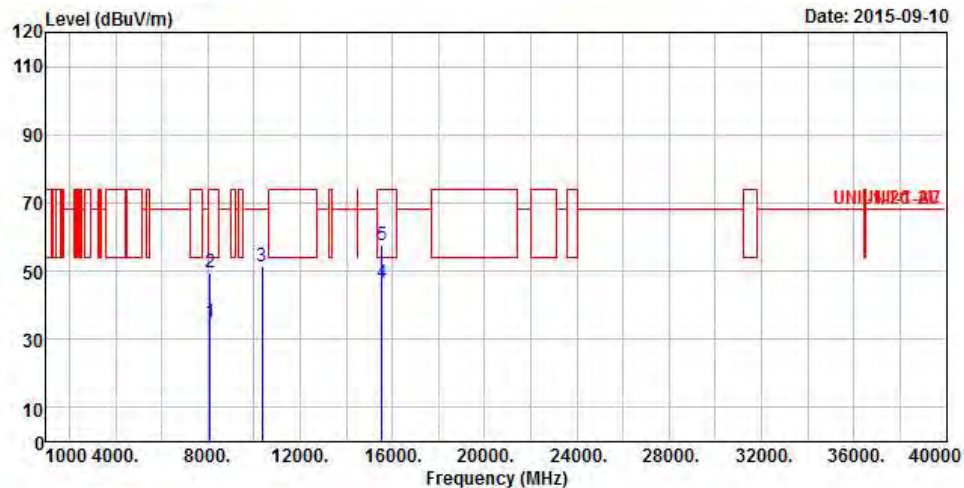

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8094.000	34.81	-19.19	54.00	28.46	36.13	5.35	35.13 Average
2	8094.000	49.74	-24.26	74.00	43.39	36.13	5.35	35.13 Peak
3	10360.000	51.56	-16.64	68.20	42.72	37.47	6.38	35.01 Peak
4	15540.000	46.39	-7.61	54.00	32.54	40.65	7.99	34.79 Average
5	15540.000	57.73	-16.27	74.00	43.88	40.65	7.99	34.79 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

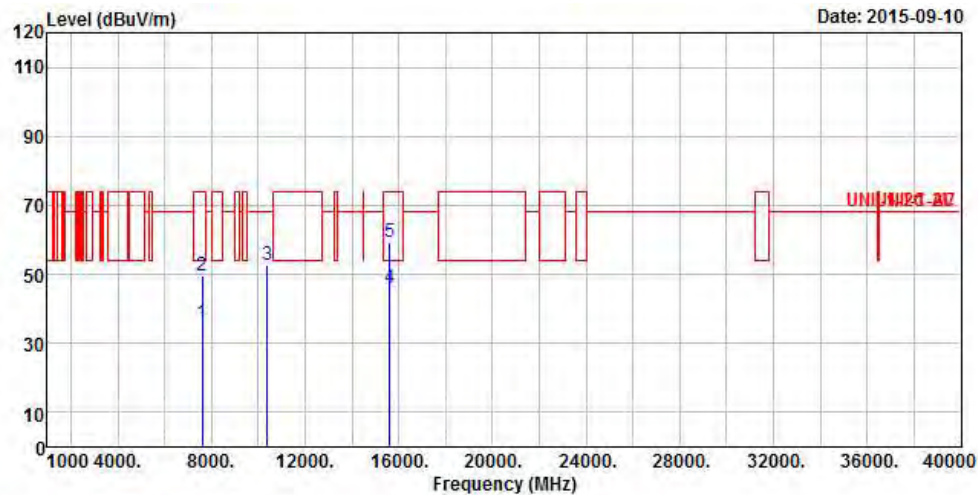

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7608.000	35.78	-18.22	54.00	29.13	36.02	5.64	35.01 Average
2	7608.000	49.57	-24.43	74.00	42.92	36.02	5.64	35.01 Peak
3	10400.000	52.87	-15.33	68.20	43.99	37.50	6.35	34.97 Peak
4	15600.000	46.13	-7.87	54.00	32.30	40.74	7.96	34.87 Average
5	15600.000	59.44	-14.56	74.00	45.61	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

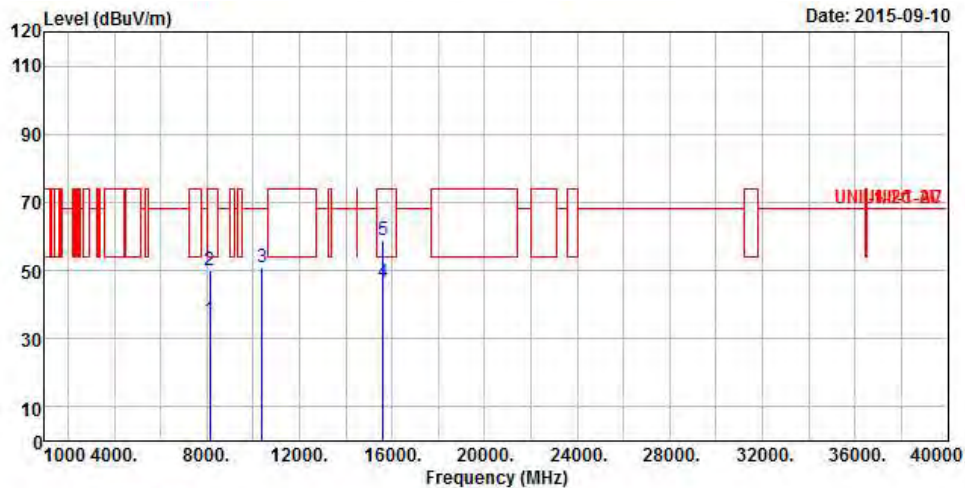

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8148.000	35.40	-18.60	54.00	29.00	36.16	5.36	35.12 Average
2	8148.000	50.17	-23.83	74.00	43.77	36.16	5.36	35.12 Peak
3	10400.000	51.00	-17.20	68.20	42.12	37.50	6.35	34.97 Peak
4	15600.000	46.34	-7.66	54.00	32.51	40.74	7.96	34.87 Average
5	15600.000	58.81	-15.19	74.00	44.98	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

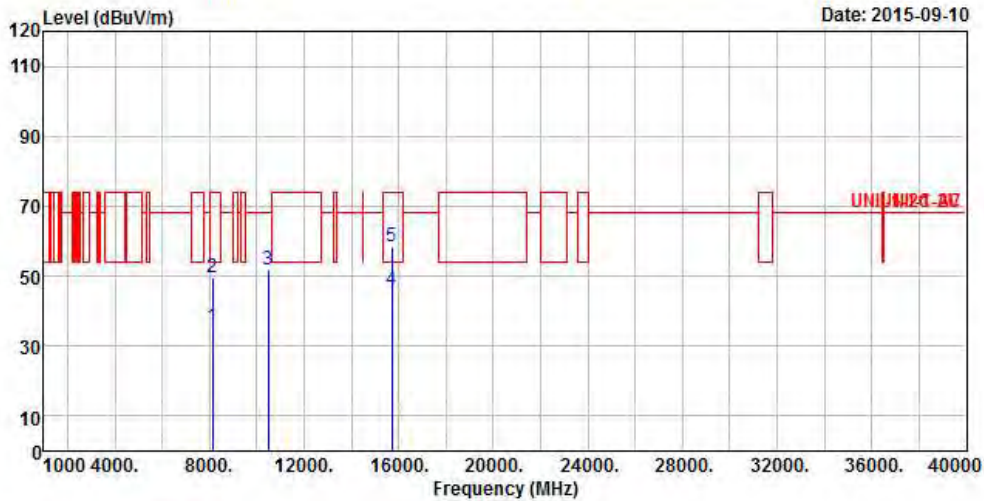

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8148.000	35.55	-18.45	54.00	29.15	36.16	5.36	35.12 Average
2	8148.000	49.63	-24.37	74.00	43.23	36.16	5.36	35.12 Peak
3	10480.000	51.81	-16.39	68.20	42.83	37.58	6.30	34.90 Peak
4	15720.000	46.25	-7.75	54.00	32.47	40.91	7.86	34.99 Average
5	15720.000	58.61	-15.39	74.00	44.83	40.91	7.86	34.99 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

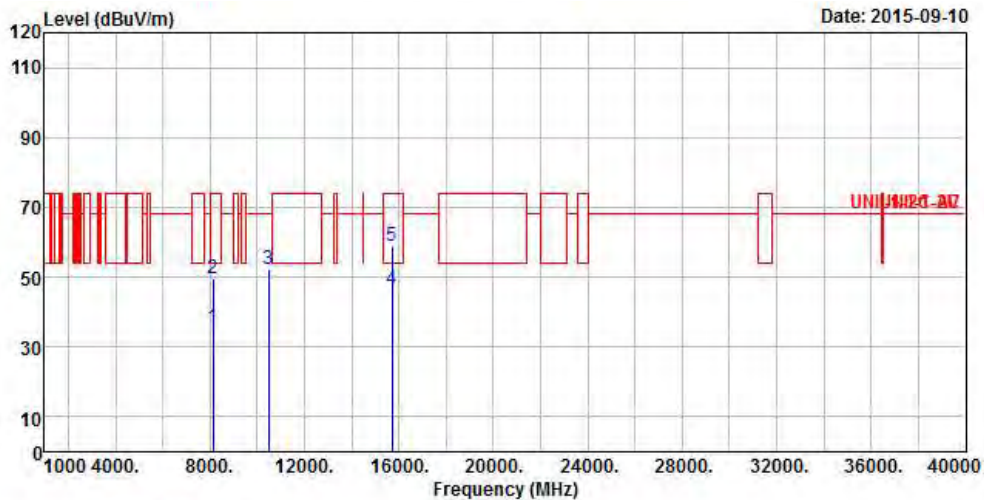

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8130.000	35.38	-18.62	54.00	28.99	36.15	5.36	35.12	Average
2	8130.000	49.72	-24.28	74.00	43.33	36.15	5.36	35.12	Peak
3	10480.000	52.09	-16.11	68.20	43.11	37.58	6.30	34.90	Peak
4	15720.000	46.29	-7.71	54.00	32.51	40.91	7.86	34.99	Average
5	15720.000	58.70	-15.30	74.00	44.92	40.91	7.86	34.99	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz-- PCB Antenna

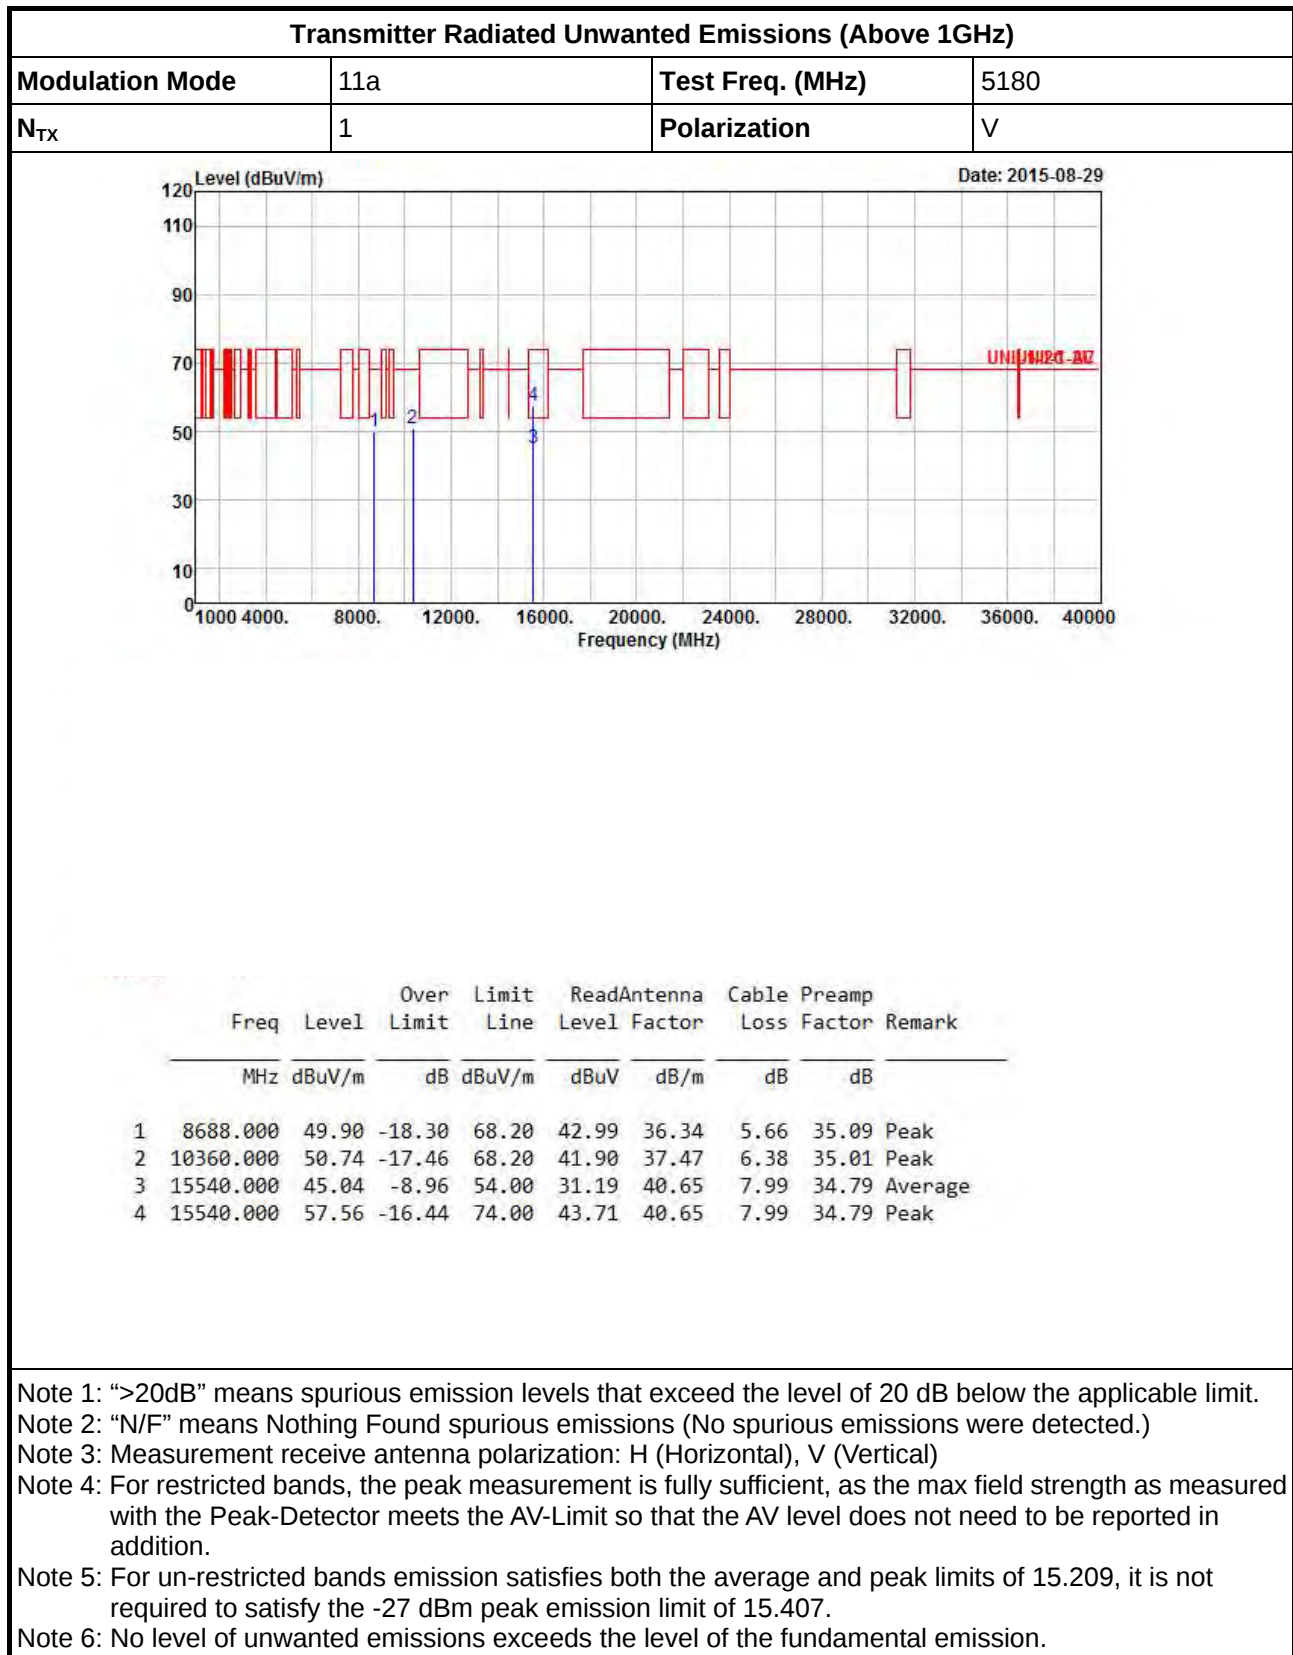

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

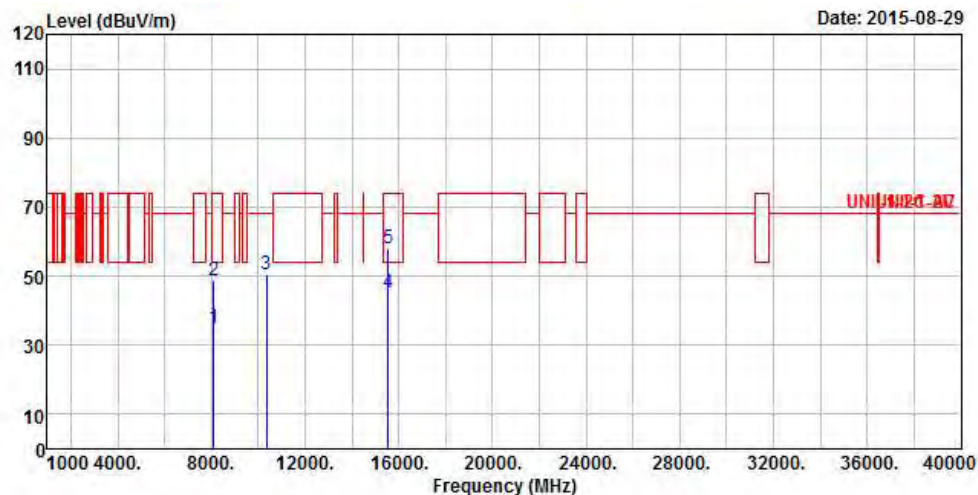

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8112.000	34.86	-19.14	54.00	28.49	36.14	5.35	35.12	Average
2	8112.000	48.56	-25.44	74.00	42.19	36.14	5.35	35.12	Peak
3	10360.000	50.41	-17.79	68.20	41.57	37.47	6.38	35.01	Peak
4	15540.000	45.13	-8.87	54.00	31.28	40.65	7.99	34.79	Average
5	15540.000	57.93	-16.07	74.00	44.08	40.65	7.99	34.79	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

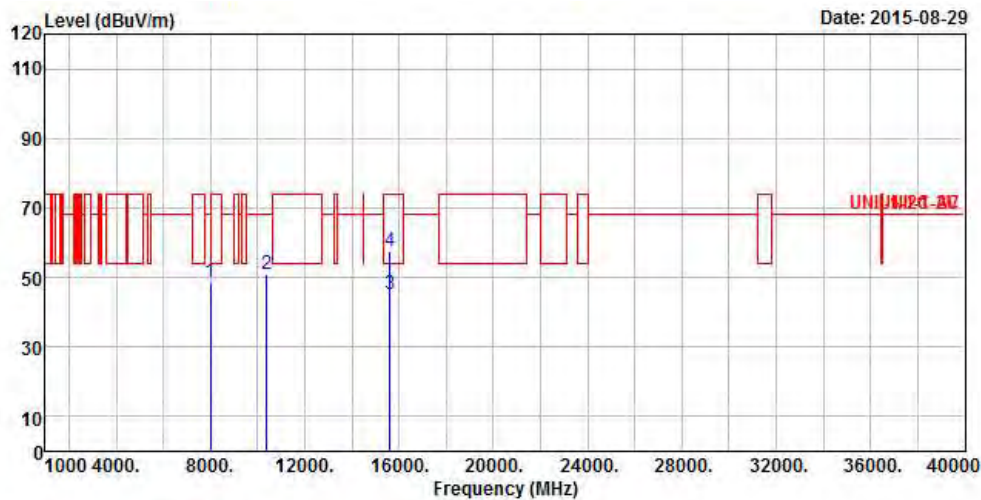

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8004.000	48.77	-19.43	68.20	42.49	36.10	5.32	35.14 Peak
2	10400.000	50.77	-17.43	68.20	41.89	37.50	6.35	34.97 Peak
3	15600.000	45.19	-8.81	54.00	31.36	40.74	7.96	34.87 Average
4	15600.000	57.78	-16.22	74.00	43.95	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

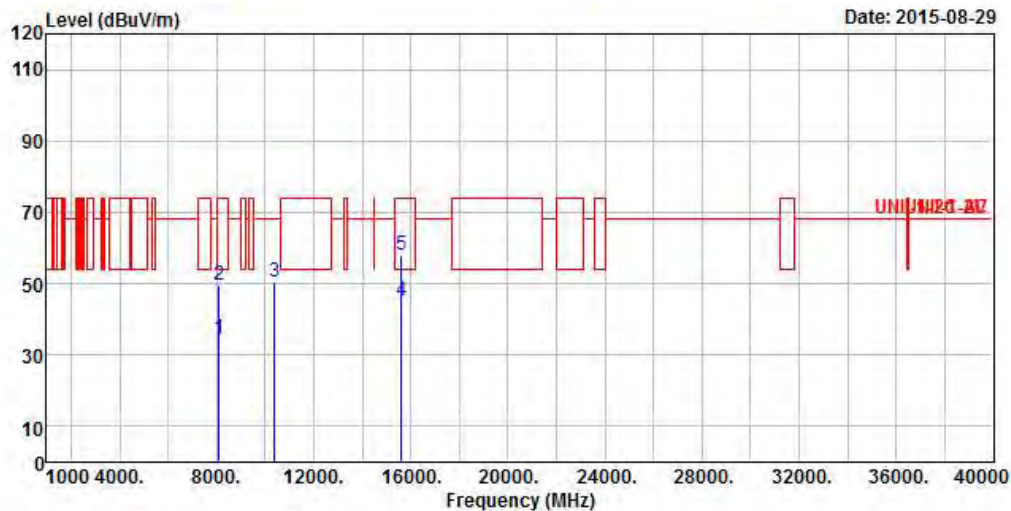


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8094.000	34.73	-19.27	54.00	28.38	36.13	5.35	35.13 Average
2	8094.000	49.46	-24.54	74.00	43.11	36.13	5.35	35.13 Peak
3	10400.000	50.51	-17.69	68.20	41.63	37.50	6.35	34.97 Peak
4	15600.000	45.15	-8.85	54.00	31.32	40.74	7.96	34.87 Average
5	15600.000	57.80	-16.20	74.00	43.97	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

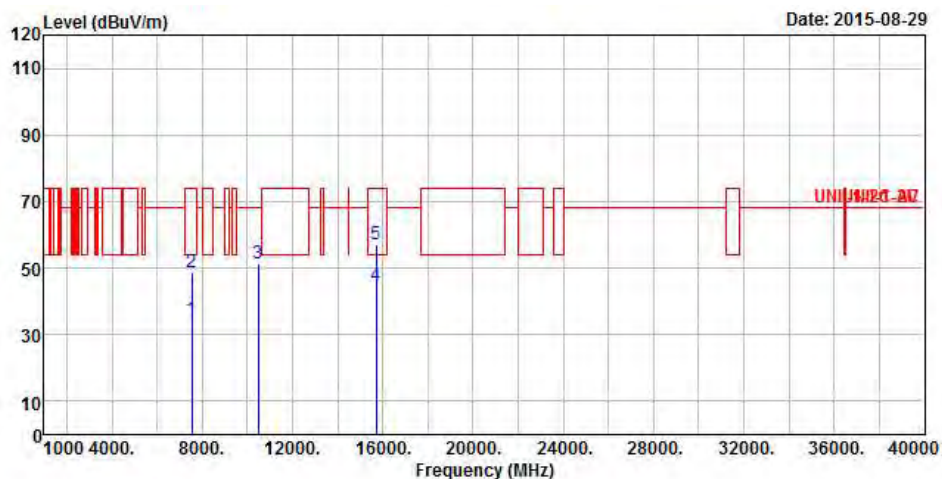

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7536.000	34.58	-19.42	54.00	27.88	36.01	5.68	34.99 Average
2	7536.000	48.91	-25.09	74.00	42.21	36.01	5.68	34.99 Peak
3	10480.000	51.17	-17.03	68.20	42.19	37.58	6.30	34.90 Peak
4	15720.000	44.94	-9.06	54.00	31.16	40.91	7.86	34.99 Average
5	15720.000	57.28	-16.72	74.00	43.50	40.91	7.86	34.99 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

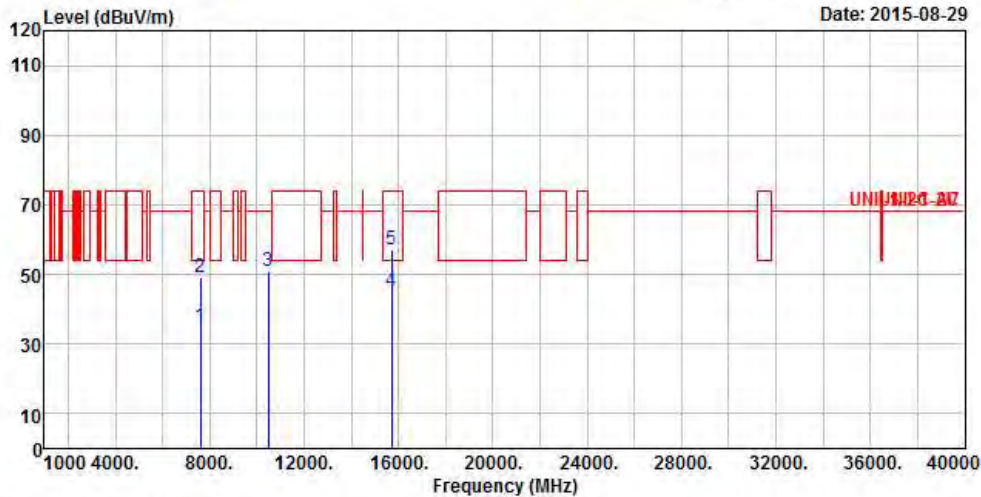

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7608.000	35.16	-18.84	54.00	28.51	36.02	5.64	35.01 Average
2	7608.000	49.09	-24.91	74.00	42.44	36.02	5.64	35.01 Peak
3	10480.000	50.74	-17.46	68.20	41.76	37.58	6.30	34.90 Peak
4	15720.000	44.98	-9.02	54.00	31.20	40.91	7.86	34.99 Average
5	15720.000	57.18	-16.82	74.00	43.40	40.91	7.86	34.99 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	V

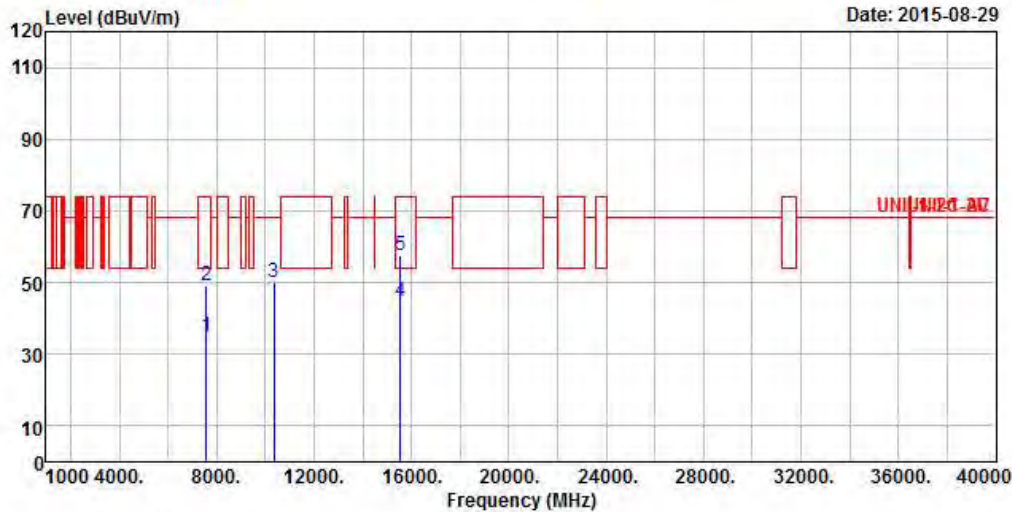

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7572.000	34.89	-19.11	54.00	28.23	36.02	5.64	35.00 Average
2	7572.000	49.13	-24.87	74.00	42.47	36.02	5.64	35.00 Peak
3	10360.000	50.02	-18.18	68.20	41.18	37.47	6.38	35.01 Peak
4	15540.000	44.58	-9.42	54.00	30.73	40.65	7.99	34.79 Average
5	15540.000	57.53	-16.47	74.00	43.68	40.65	7.99	34.79 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

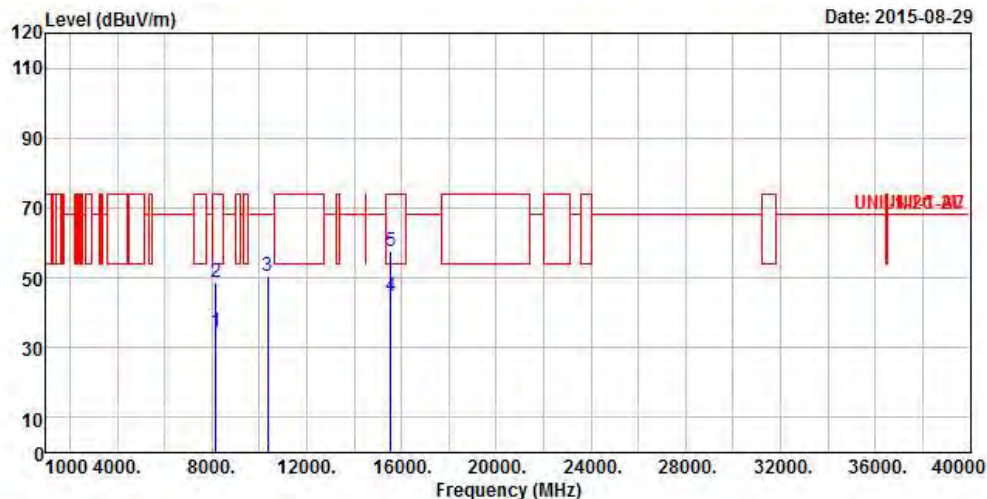


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8166.000	34.58	-19.42	54.00	28.15	36.17	5.37	35.11 Average
2	8166.000	48.72	-25.28	74.00	42.29	36.17	5.37	35.11 Peak
3	10360.000	50.40	-17.80	68.20	41.56	37.47	6.38	35.01 Peak
4	15540.000	44.55	-9.45	54.00	30.70	40.65	7.99	34.79 Average
5	15540.000	57.73	-16.27	74.00	43.88	40.65	7.99	34.79 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

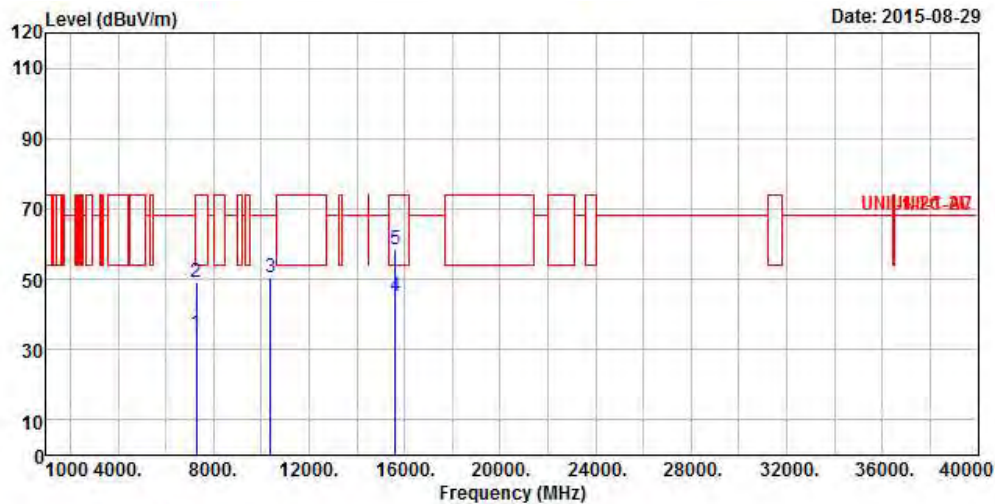

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7284.000	34.55	-19.45	54.00	28.15	35.92	5.42	34.94 Average
2	7284.000	49.11	-24.89	74.00	42.71	35.92	5.42	34.94 Peak
3	10400.000	50.35	-17.85	68.20	41.47	37.50	6.35	34.97 Peak
4	15600.000	45.06	-8.94	54.00	31.23	40.74	7.96	34.87 Average
5	15600.000	58.36	-15.64	74.00	44.53	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

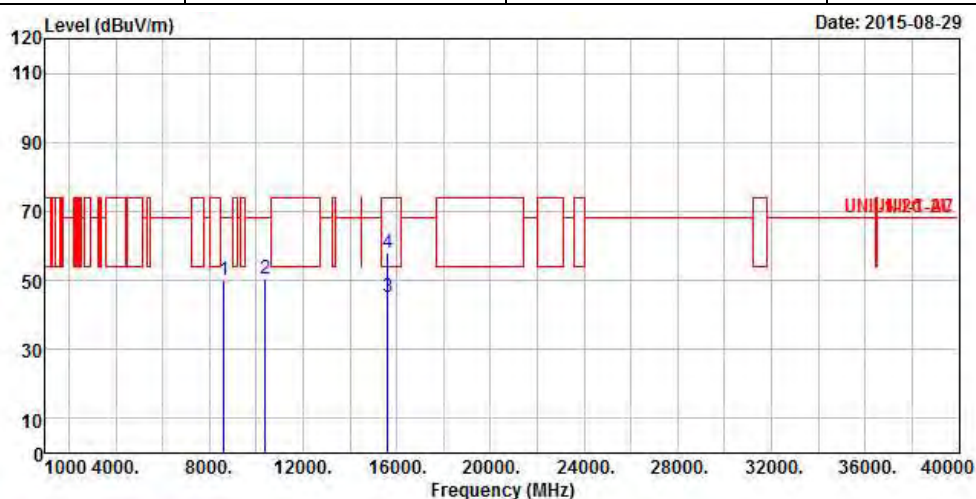

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8616.000	49.96	-18.24	68.20	43.14	36.32	5.58	35.08 Peak
2	10400.000	50.62	-17.58	68.20	41.74	37.50	6.35	34.97 Peak
3	15600.000	45.10	-8.90	54.00	31.27	40.74	7.96	34.87 Average
4	15600.000	58.11	-15.89	74.00	44.28	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

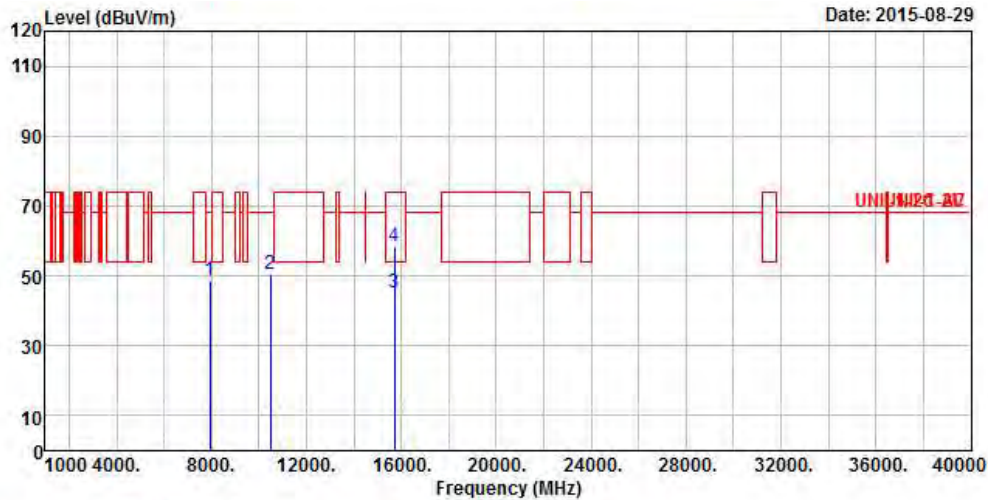

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7950.000	48.68	-19.52	68.20	42.37	36.09	5.34	35.12	Peak
2	10480.000	50.63	-17.57	68.20	41.65	37.58	6.30	34.90	Peak
3	15720.000	45.32	-8.68	54.00	31.54	40.91	7.86	34.99	Average
4	15720.000	58.36	-15.64	74.00	44.58	40.91	7.86	34.99	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

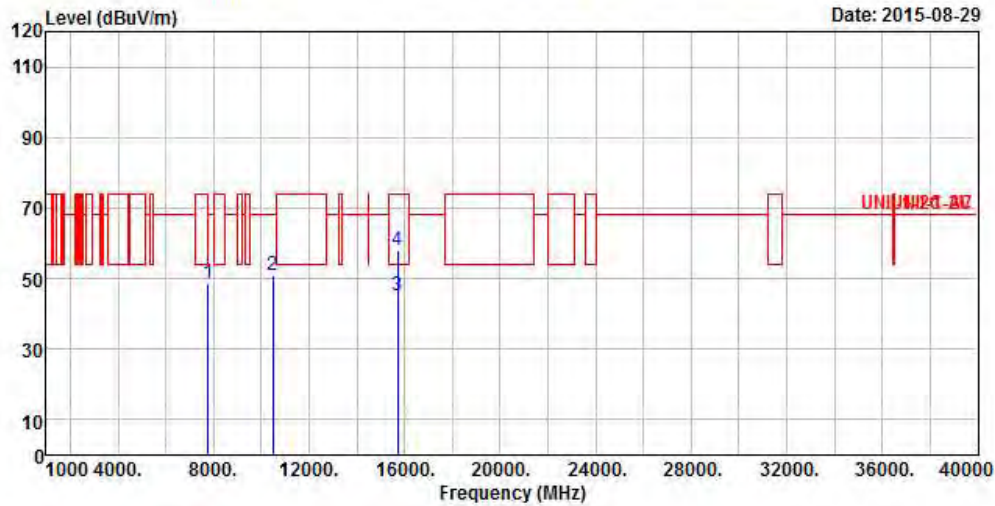

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7788.000	48.70	-19.50	68.20	42.23	36.06	5.48	35.07 Peak
2	10480.000	50.74	-17.46	68.20	41.76	37.58	6.30	34.90 Peak
3	15720.000	45.36	-8.64	54.00	31.58	40.91	7.86	34.99 Average
4	15720.000	58.02	-15.98	74.00	44.24	40.91	7.86	34.99 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz-- PIFA Antenna

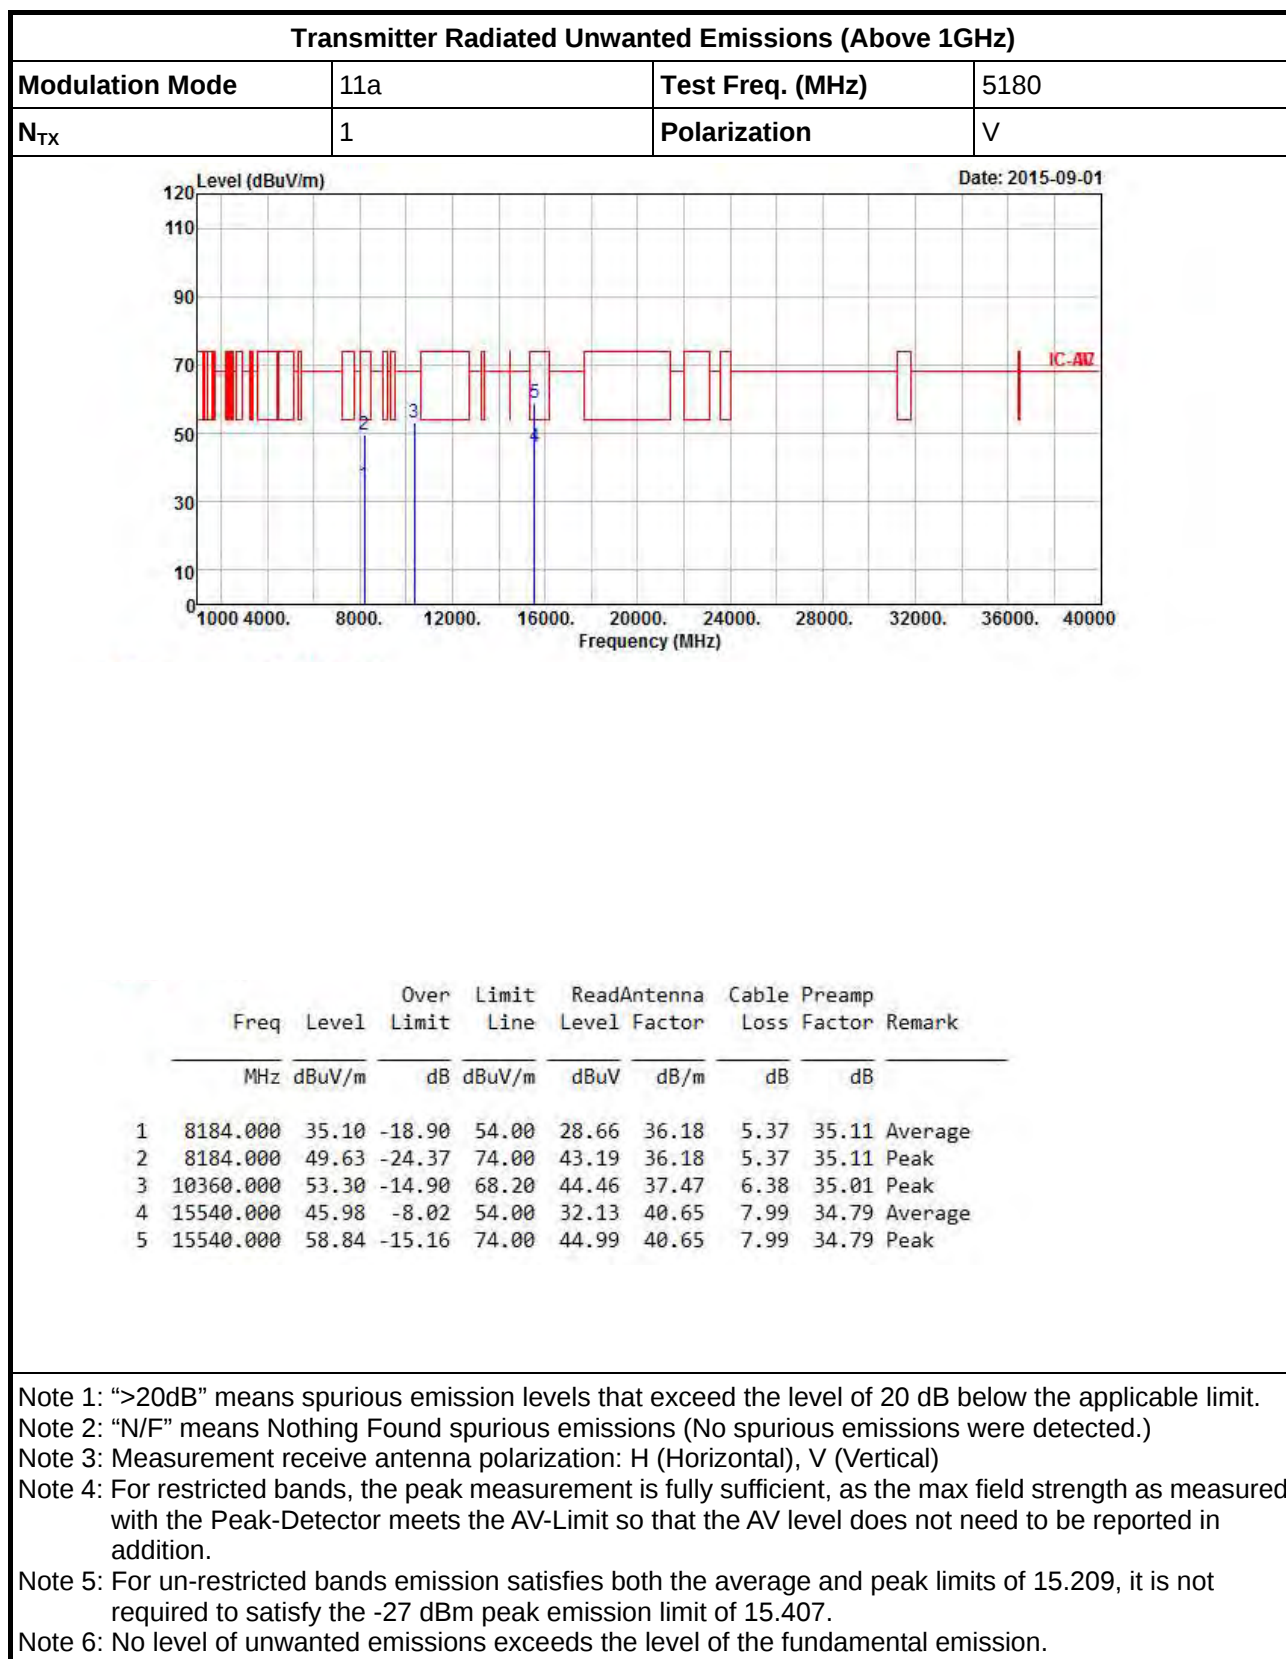

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

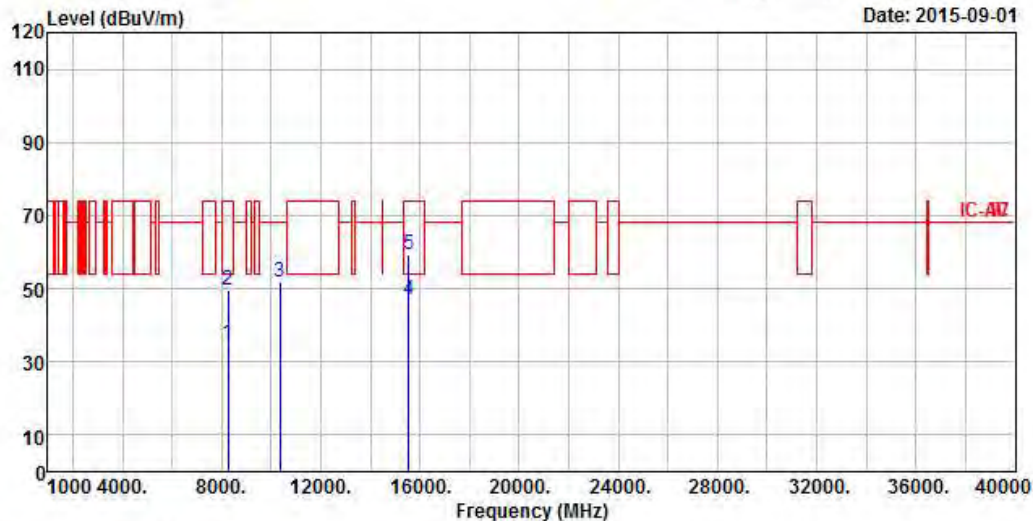

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8274.000	34.85	-19.15	54.00	28.34	36.21	5.40	35.10 Average
2	8274.000	49.61	-24.39	74.00	43.10	36.21	5.40	35.10 Peak
3	10360.000	51.92	-16.28	68.20	43.08	37.47	6.38	35.01 Peak
4	15540.000	46.79	-7.21	54.00	32.94	40.65	7.99	34.79 Average
5	15540.000	59.44	-14.56	74.00	45.59	40.65	7.99	34.79 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

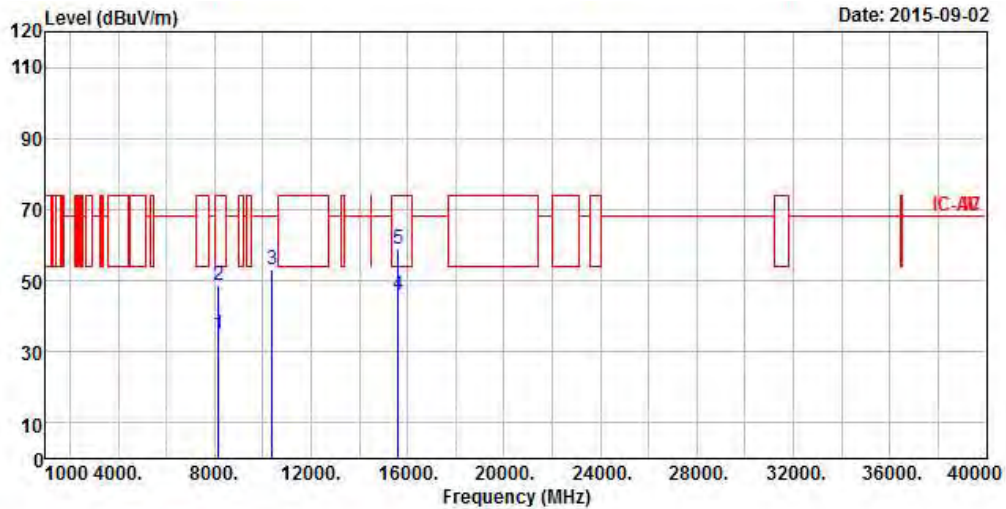

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8166.000	35.01	-18.99	54.00	28.58	36.17	5.37	35.11	Average
2	8166.000	48.92	-25.08	74.00	42.49	36.17	5.37	35.11	Peak
3	10400.000	53.05	-15.15	68.20	44.17	37.50	6.35	34.97	Peak
4	15600.000	46.14	-7.86	54.00	32.31	40.74	7.96	34.87	Average
5	15600.000	58.77	-15.23	74.00	44.94	40.74	7.96	34.87	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

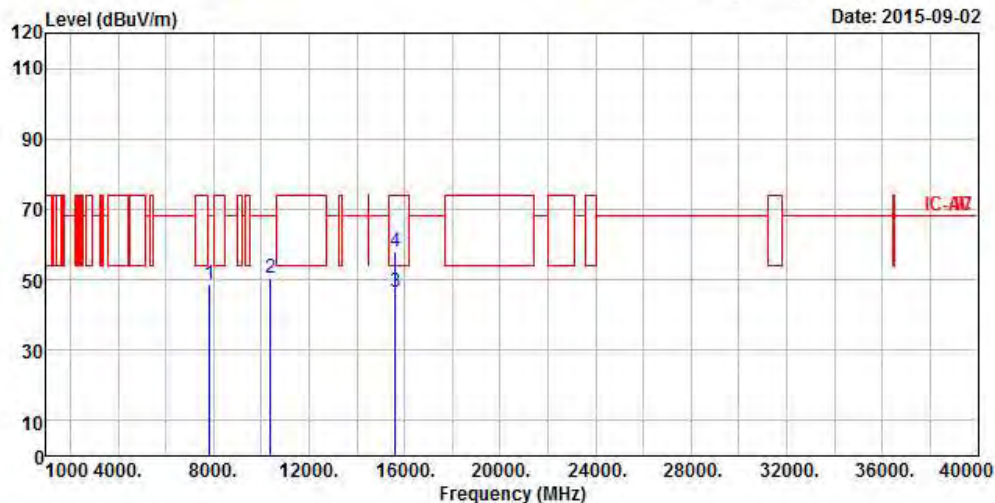

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7824.000	48.84	-19.36	68.20	42.42	36.06	5.44	35.08 Peak
2	10400.000	50.46	-17.74	68.20	41.58	37.50	6.35	34.97 Peak
3	15600.000	46.57	-7.43	54.00	32.74	40.74	7.96	34.87 Average
4	15600.000	58.17	-15.83	74.00	44.34	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

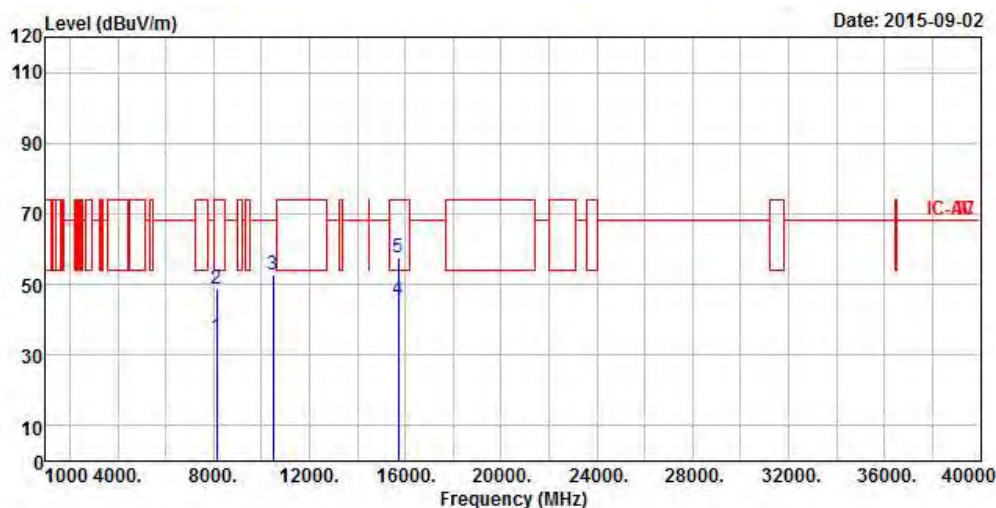

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8130.000	34.87	-19.13	54.00	28.48	36.15	5.36	35.12 Average
2	8130.000	48.54	-25.46	74.00	42.15	36.15	5.36	35.12 Peak
3	10480.000	52.78	-15.42	68.20	43.80	37.58	6.30	34.90 Peak
4	15720.000	45.70	-8.30	54.00	31.92	40.91	7.86	34.99 Average
5	15720.000	57.74	-16.26	74.00	43.96	40.91	7.86	34.99 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

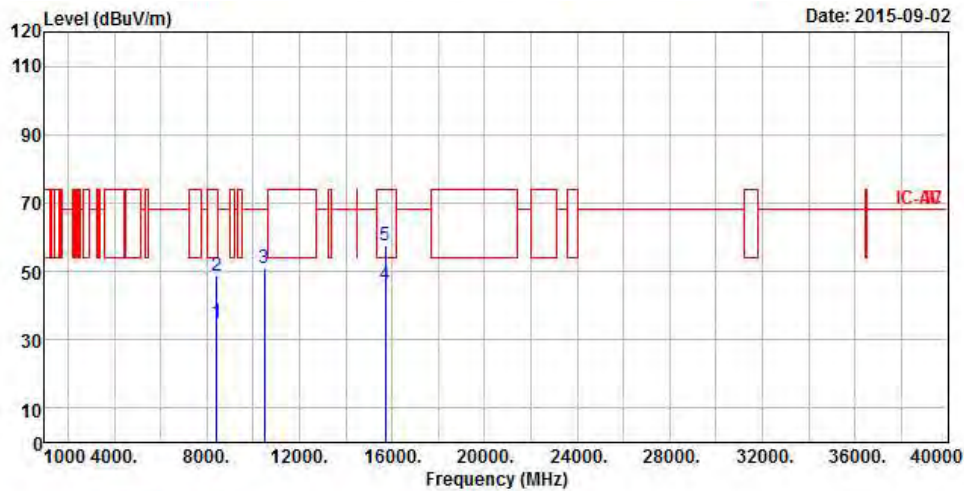

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8436.000	34.81	-19.19	54.00	28.16	36.27	5.45	35.07	Average
2	8436.000	48.92	-25.08	74.00	42.27	36.27	5.45	35.07	Peak
3	10480.000	51.11	-17.09	68.20	42.13	37.58	6.30	34.90	Peak
4	15720.000	46.22	-7.78	54.00	32.44	40.91	7.86	34.99	Average
5	15720.000	57.55	-16.45	74.00	43.77	40.91	7.86	34.99	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	V

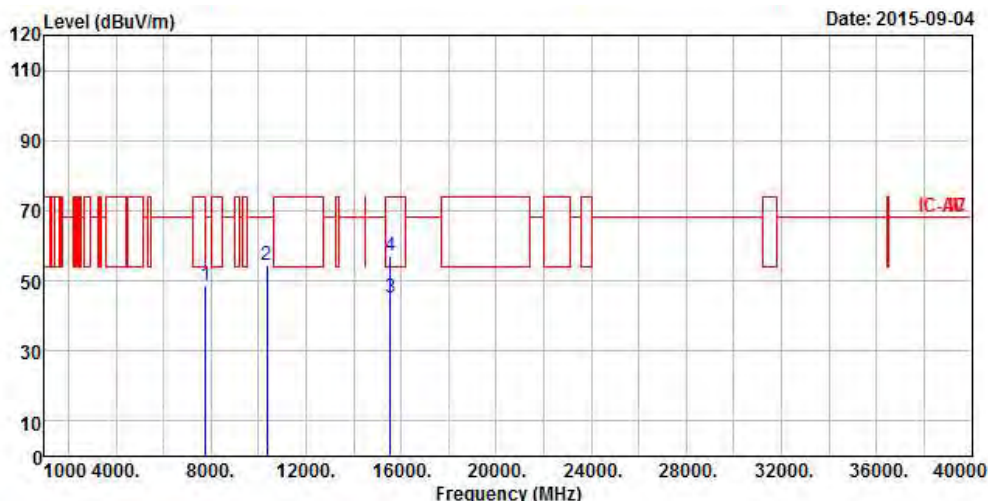

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7770.000	48.70	-19.50	68.20	42.23	36.05	5.48	35.06	Peak
2	10360.000	54.37	-13.83	68.20	45.53	37.47	6.38	35.01	Peak
3	15540.000	45.38	-8.62	54.00	31.53	40.65	7.99	34.79	Average
4	15540.000	57.23	-16.77	74.00	43.38	40.65	7.99	34.79	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

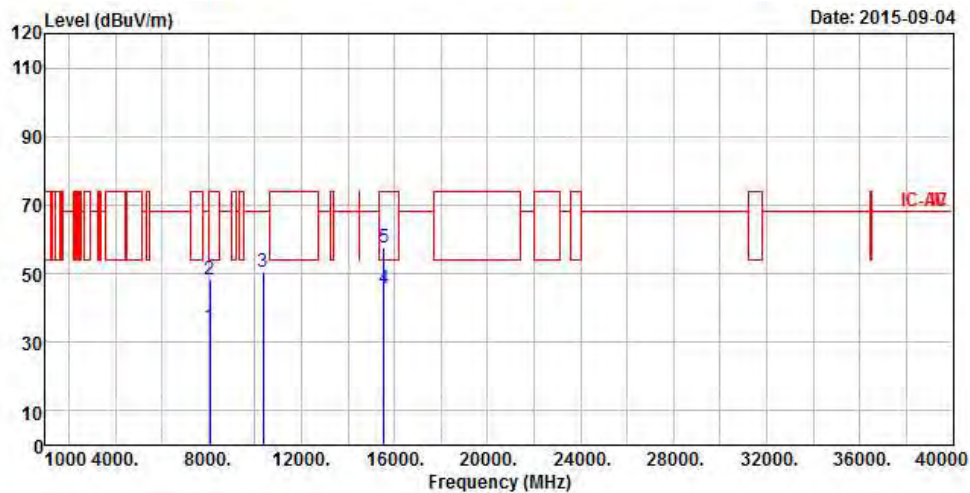

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8076.000	34.37	-19.63	54.00	28.04	36.13	5.33	35.13 Average
2	8076.000	48.33	-25.67	74.00	42.00	36.13	5.33	35.13 Peak
3	10360.000	50.63	-17.57	68.20	41.79	37.47	6.38	35.01 Peak
4	15540.000	45.65	-8.35	54.00	31.80	40.65	7.99	34.79 Average
5	15540.000	57.77	-16.23	74.00	43.92	40.65	7.99	34.79 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

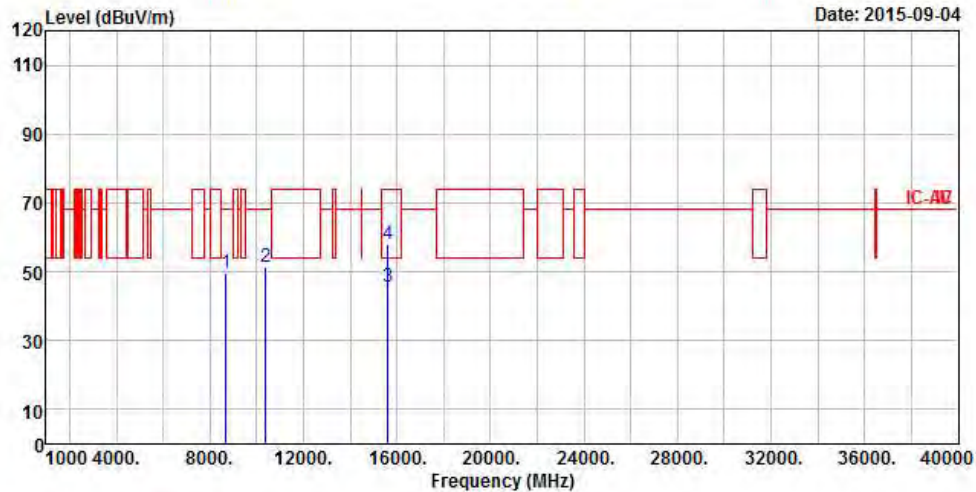

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8688.000	49.49	-18.71	68.20	42.58	36.34	5.66	35.09 Peak
2	10400.000	51.25	-16.95	68.20	42.37	37.50	6.35	34.97 Peak
3	15600.000	45.56	-8.44	54.00	31.73	40.74	7.96	34.87 Average
4	15600.000	58.02	-15.98	74.00	44.19	40.74	7.96	34.87 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

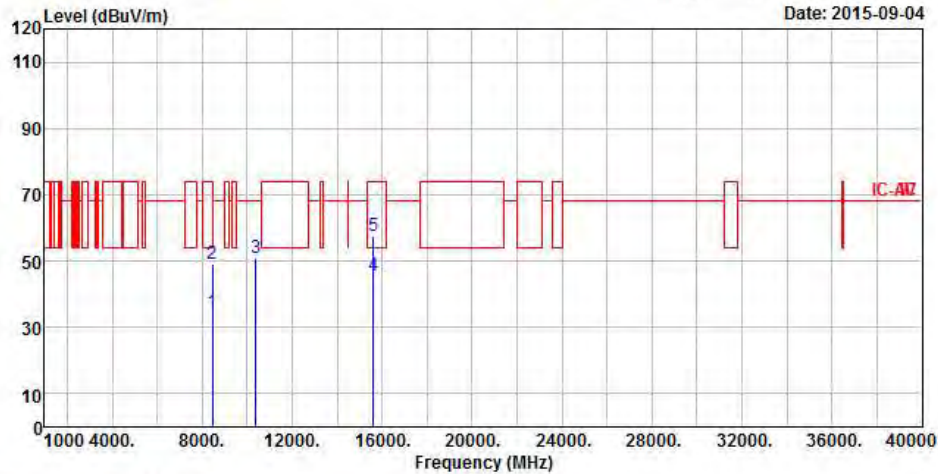

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8454.000	34.63	-19.37	54.00	27.97	36.28	5.45	35.07	Average
2	8454.000	48.93	-25.07	74.00	42.27	36.28	5.45	35.07	Peak
3	10400.000	50.70	-17.50	68.20	41.82	37.50	6.35	34.97	Peak
4	15600.000	45.76	-8.24	54.00	31.93	40.74	7.96	34.87	Average
5	15600.000	57.43	-16.57	74.00	43.60	40.74	7.96	34.87	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

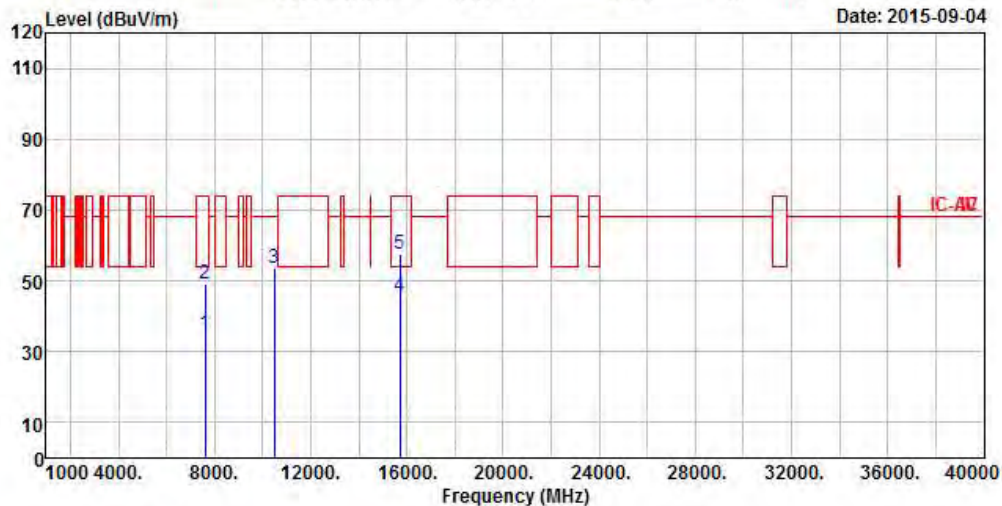

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7608.000	34.93	-19.07	54.00	28.28	36.02	5.64	35.01 Average
2	7608.000	48.96	-25.04	74.00	42.31	36.02	5.64	35.01 Peak
3	10480.000	53.37	-14.83	68.20	44.39	37.58	6.30	34.90 Peak
4	15720.000	45.61	-8.39	54.00	31.83	40.91	7.86	34.99 Average
5	15720.000	57.74	-16.26	74.00	43.96	40.91	7.86	34.99 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

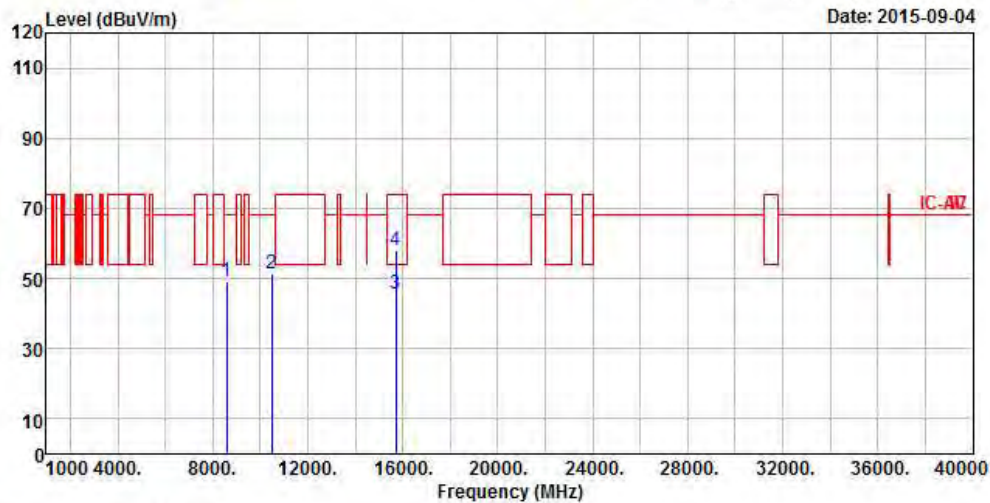

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8598.000	49.15	-19.05	68.20	42.33	36.32	5.58	35.08 Peak
2	10480.000	51.55	-16.65	68.20	42.57	37.58	6.30	34.90 Peak
3	15720.000	45.59	-8.41	54.00	31.81	40.91	7.86	34.99 Average
4	15720.000	57.99	-16.01	74.00	44.21	40.91	7.86	34.99 Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz–Dipole Antenna

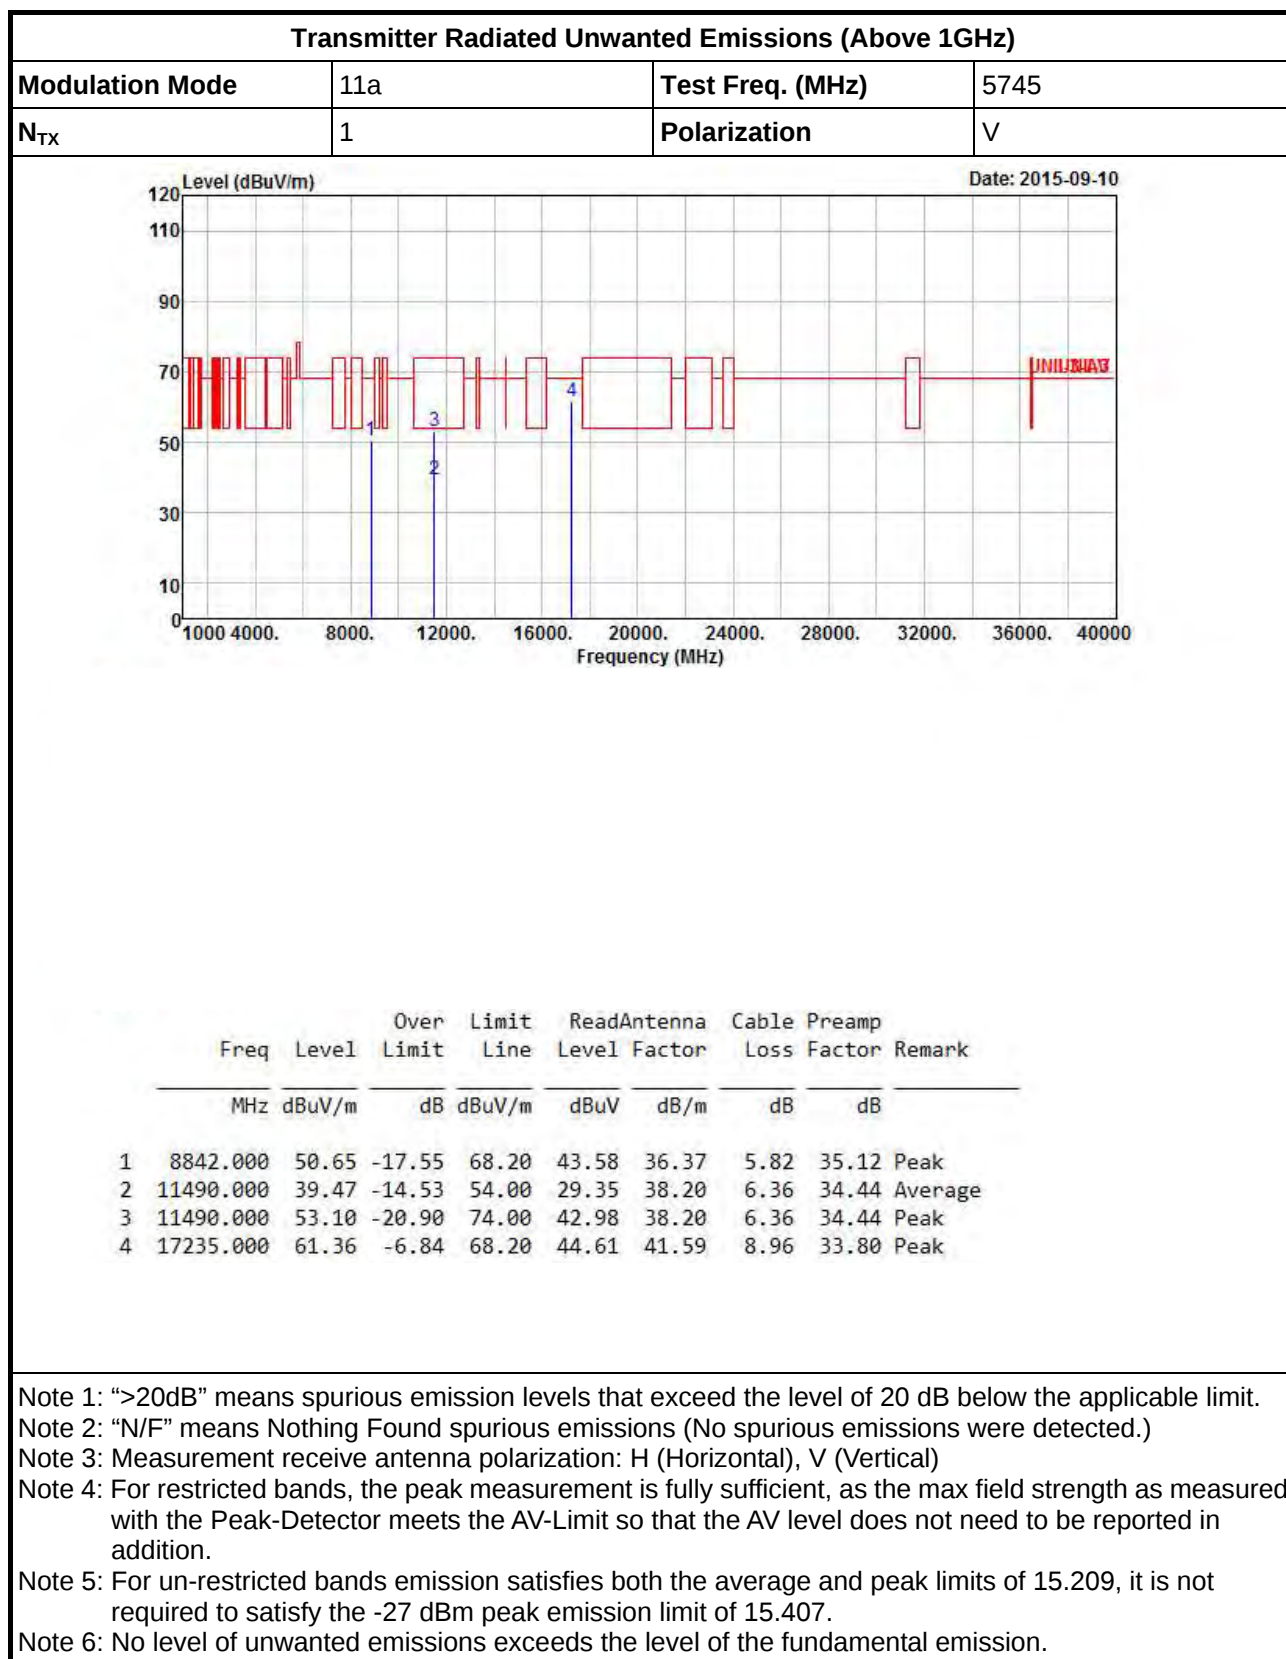

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

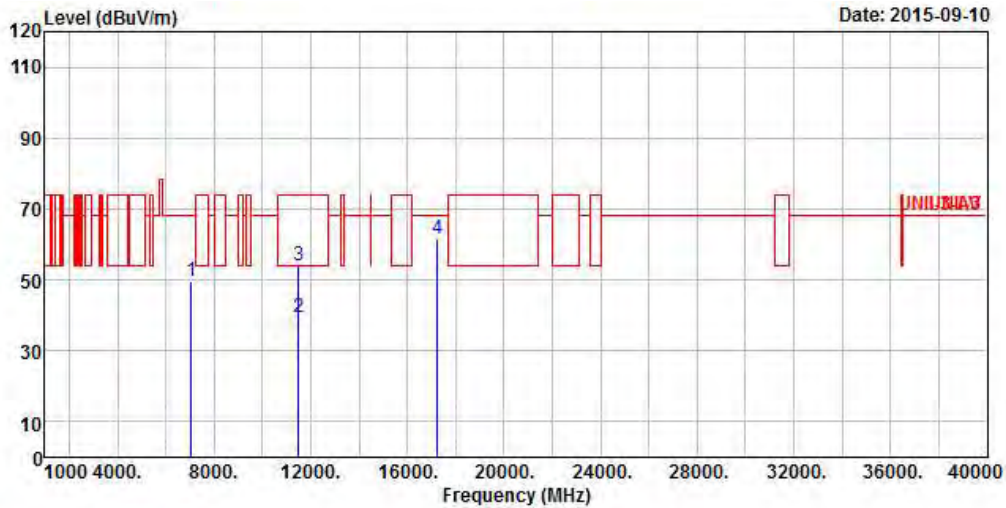

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7066.000	49.41	-18.79	68.20	43.30	35.83	5.18	34.90 Peak
2	11490.000	39.42	-14.58	54.00	29.30	38.20	6.36	34.44 Average
3	11490.000	54.15	-19.85	74.00	44.03	38.20	6.36	34.44 Peak
4	17235.000	61.53	-6.67	68.20	44.78	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

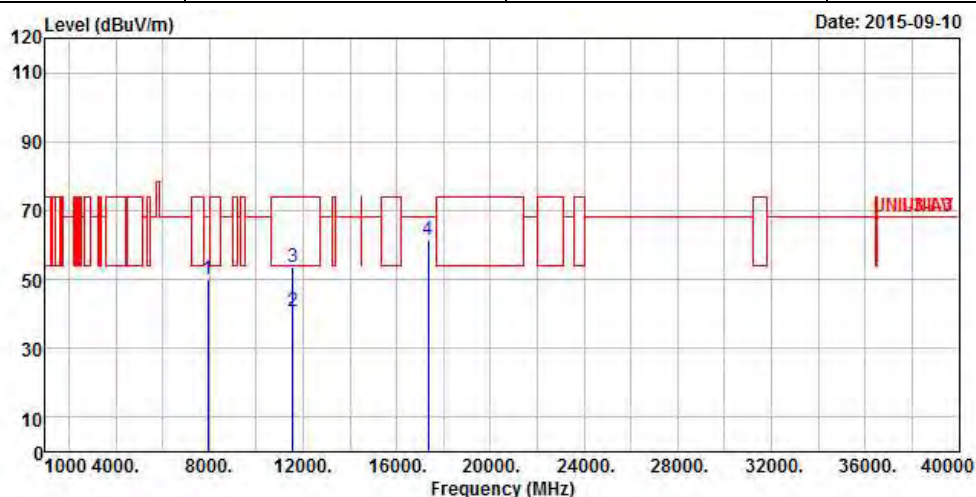

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7940.000	50.12	-18.08	68.20	43.81	36.09	5.34	35.12 Peak
2	11570.000	40.63	-13.37	54.00	30.33	38.37	6.44	34.51 Average
3	11570.000	53.56	-20.44	74.00	43.26	38.37	6.44	34.51 Peak
4	17355.000	61.56	-6.64	68.20	44.76	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

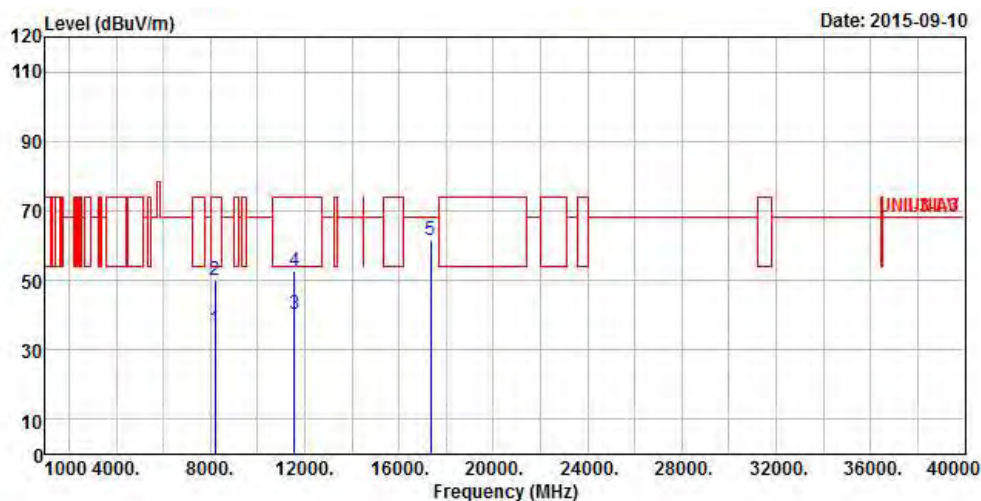

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8204.000	35.70	-18.30	54.00	29.25	36.18	5.38	35.11 Average
2	8204.000	49.94	-24.06	74.00	43.49	36.18	5.38	35.11 Peak
3	11570.000	40.43	-13.57	54.00	30.13	38.37	6.44	34.51 Average
4	11570.000	52.61	-21.39	74.00	42.31	38.37	6.44	34.51 Peak
5	17355.000	61.68	-6.52	68.20	44.88	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

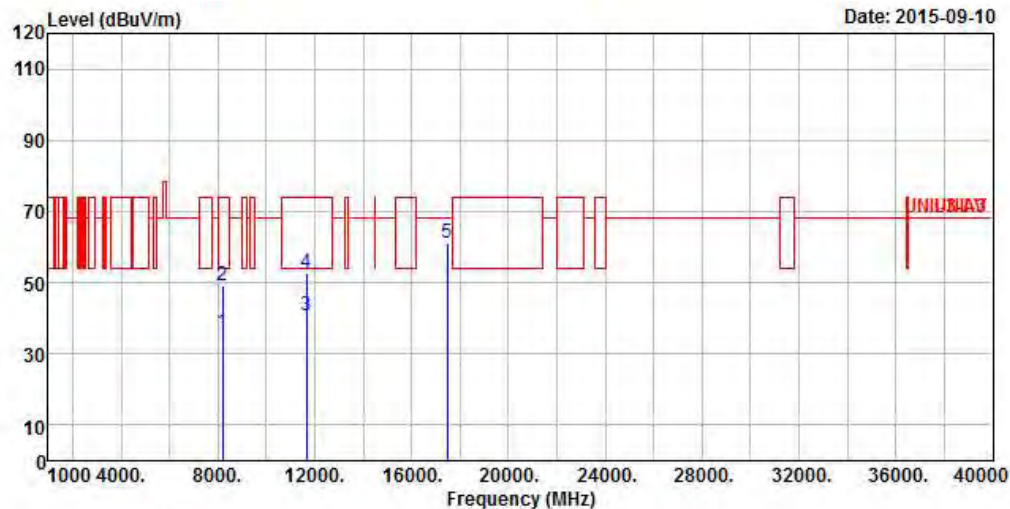

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8204.000	35.89	-18.11	54.00	29.44	36.18	5.38	35.11 Average
2	8204.000	49.22	-24.78	74.00	42.77	36.18	5.38	35.11 Peak
3	11650.000	40.89	-13.11	54.00	30.39	38.53	6.52	34.55 Average
4	11650.000	52.70	-21.30	74.00	42.20	38.53	6.52	34.55 Peak
5	17475.000	61.17	-7.03	68.20	44.31	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

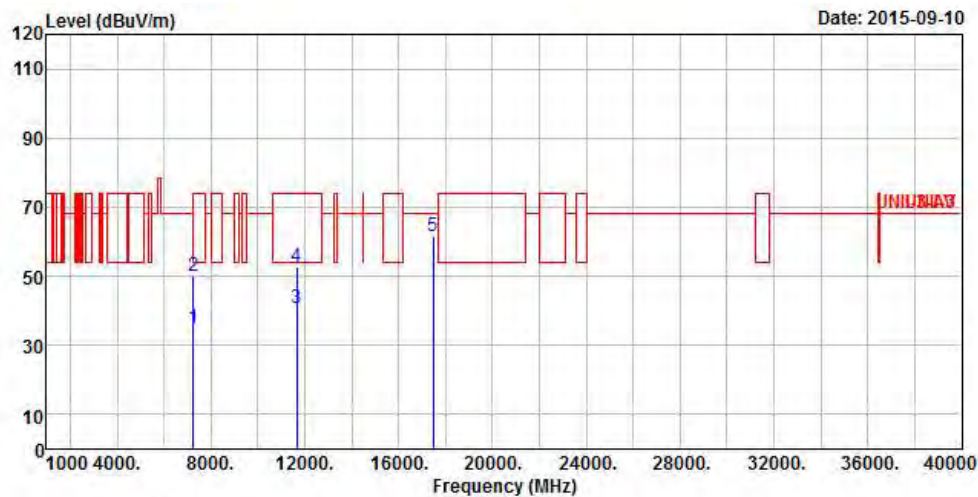

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7258.000	35.04	-18.96	54.00	28.70	35.90	5.37	34.93 Average
2	7258.000	49.91	-24.09	74.00	43.57	35.90	5.37	34.93 Peak
3	11650.000	40.76	-13.24	54.00	30.26	38.53	6.52	34.55 Average
4	11650.000	52.64	-21.36	74.00	42.14	38.53	6.52	34.55 Peak
5	17475.000	61.35	-6.85	68.20	44.49	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	V

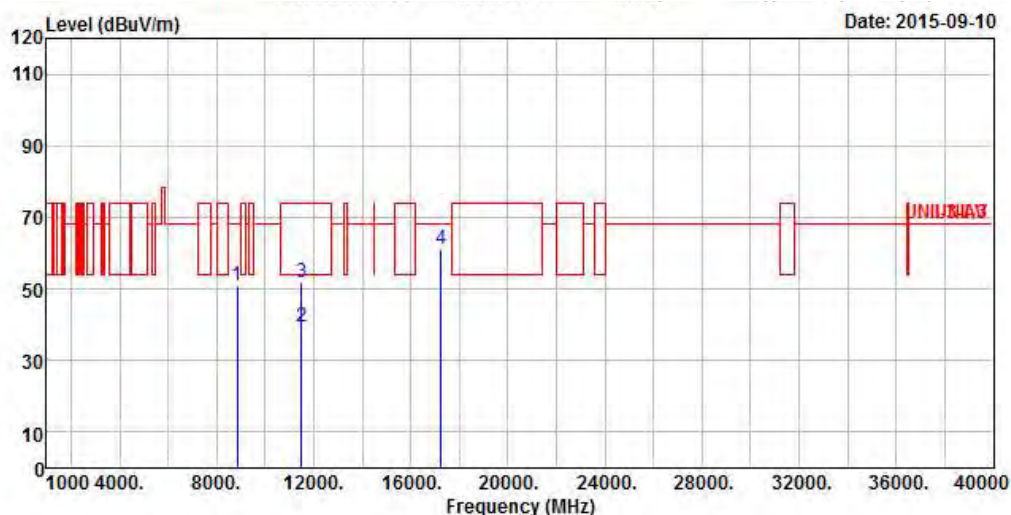

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8864.000	50.82	-17.38	68.20	43.71	36.37	5.86	35.12 Peak
2	11490.000	39.59	-14.41	54.00	29.47	38.20	6.36	34.44 Average
3	11490.000	51.91	-22.09	74.00	41.79	38.20	6.36	34.44 Peak
4	17235.000	61.05	-7.15	68.20	44.30	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

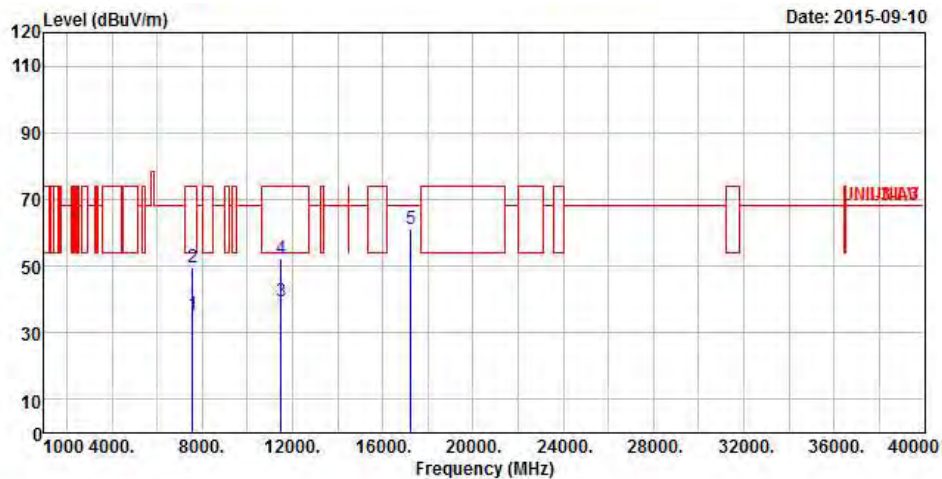

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7590.000	35.57	-18.43	54.00	28.91	36.02	5.64	35.00 Average
2	7590.000	49.74	-24.26	74.00	43.08	36.02	5.64	35.00 Peak
3	11490.000	39.62	-14.38	54.00	29.50	38.20	6.36	34.44 Average
4	11490.000	52.14	-21.86	74.00	42.02	38.20	6.36	34.44 Peak
5	17235.000	61.11	-7.09	68.20	44.36	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

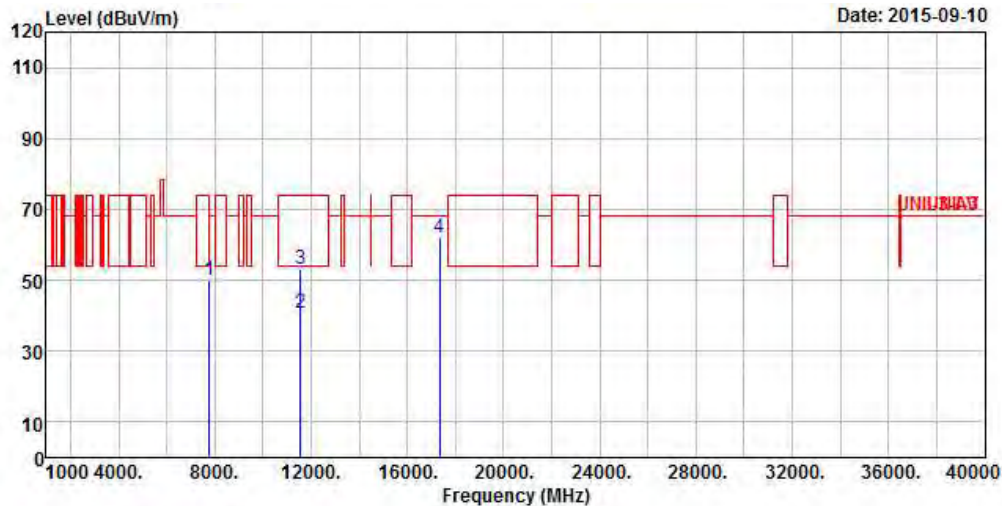

	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Remark
					dBuV	dB/m	dB	dB
1	7764.000	49.84	-18.36	68.20	43.34	36.05	5.51	35.06 Peak
2	11570.000	40.84	-13.16	54.00	30.54	38.37	6.44	34.51 Average
3	11570.000	52.97	-21.03	74.00	42.67	38.37	6.44	34.51 Peak
4	17355.000	61.93	-6.27	68.20	45.13	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

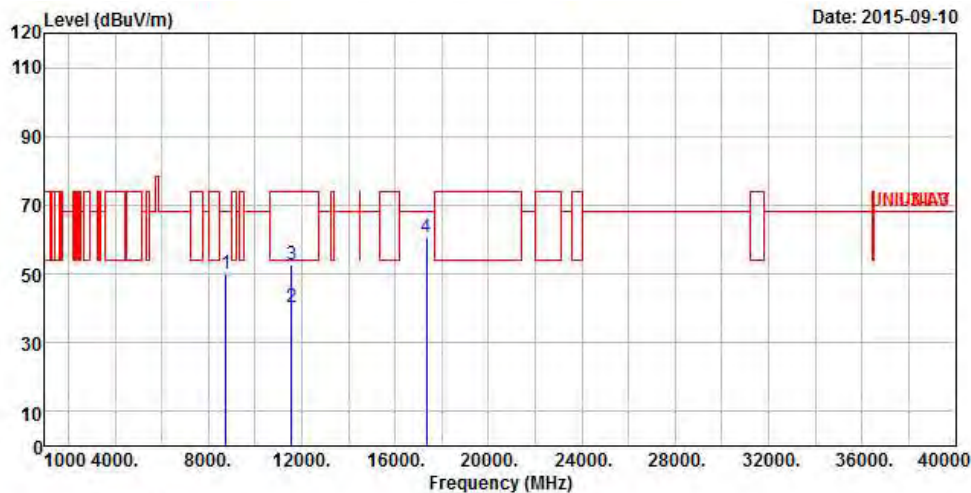


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8754.000	50.13	-18.07	68.20	43.15	36.35	5.74	35.11 Peak
2	11570.000	40.32	-13.68	54.00	30.02	38.37	6.44	34.51 Average
3	11570.000	52.52	-21.48	74.00	42.22	38.37	6.44	34.51 Peak
4	17355.000	60.84	-7.36	68.20	44.04	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

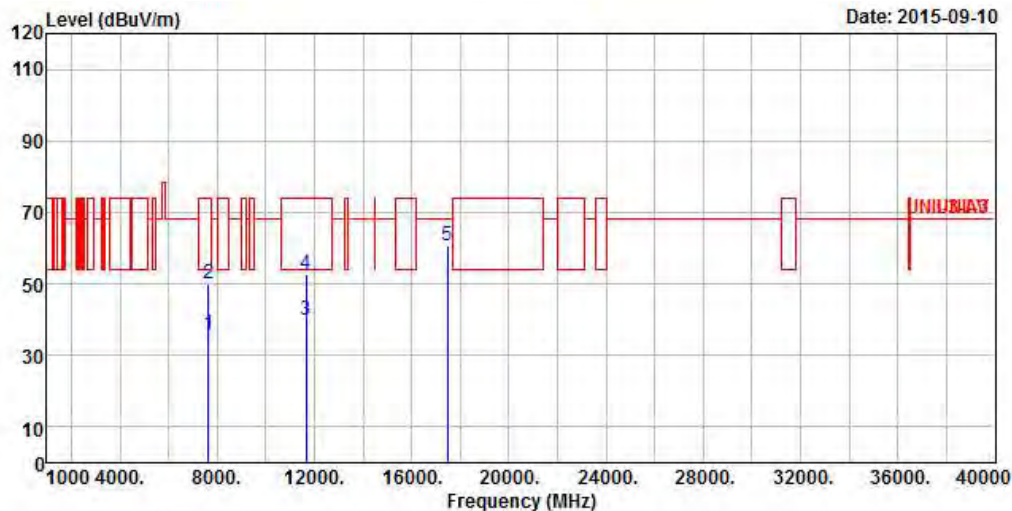

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7632.000	35.97	-18.03	54.00	29.35	36.03	5.61	35.02	Average
2	7632.000	49.90	-24.10	74.00	43.28	36.03	5.61	35.02	Peak
3	11650.000	39.94	-14.06	54.00	29.44	38.53	6.52	34.55	Average
4	11650.000	52.72	-21.28	74.00	42.22	38.53	6.52	34.55	Peak
5	17475.000	60.82	-7.38	68.20	43.96	41.69	8.92	33.75	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

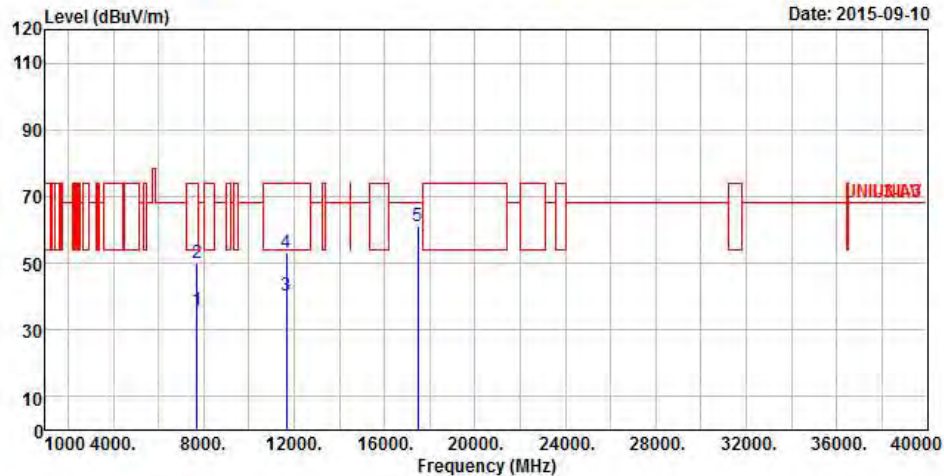

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7720.000	35.70	-18.30	54.00	29.17	36.04	5.54	35.05 Average
2	7720.000	50.01	-23.99	74.00	43.48	36.04	5.54	35.05 Peak
3	11650.000	40.18	-13.82	54.00	29.68	38.53	6.52	34.55 Average
4	11650.000	53.22	-20.78	74.00	42.72	38.53	6.52	34.55 Peak
5	17475.000	61.06	-7.14	68.20	44.20	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

3.6.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz–PCB Antenna

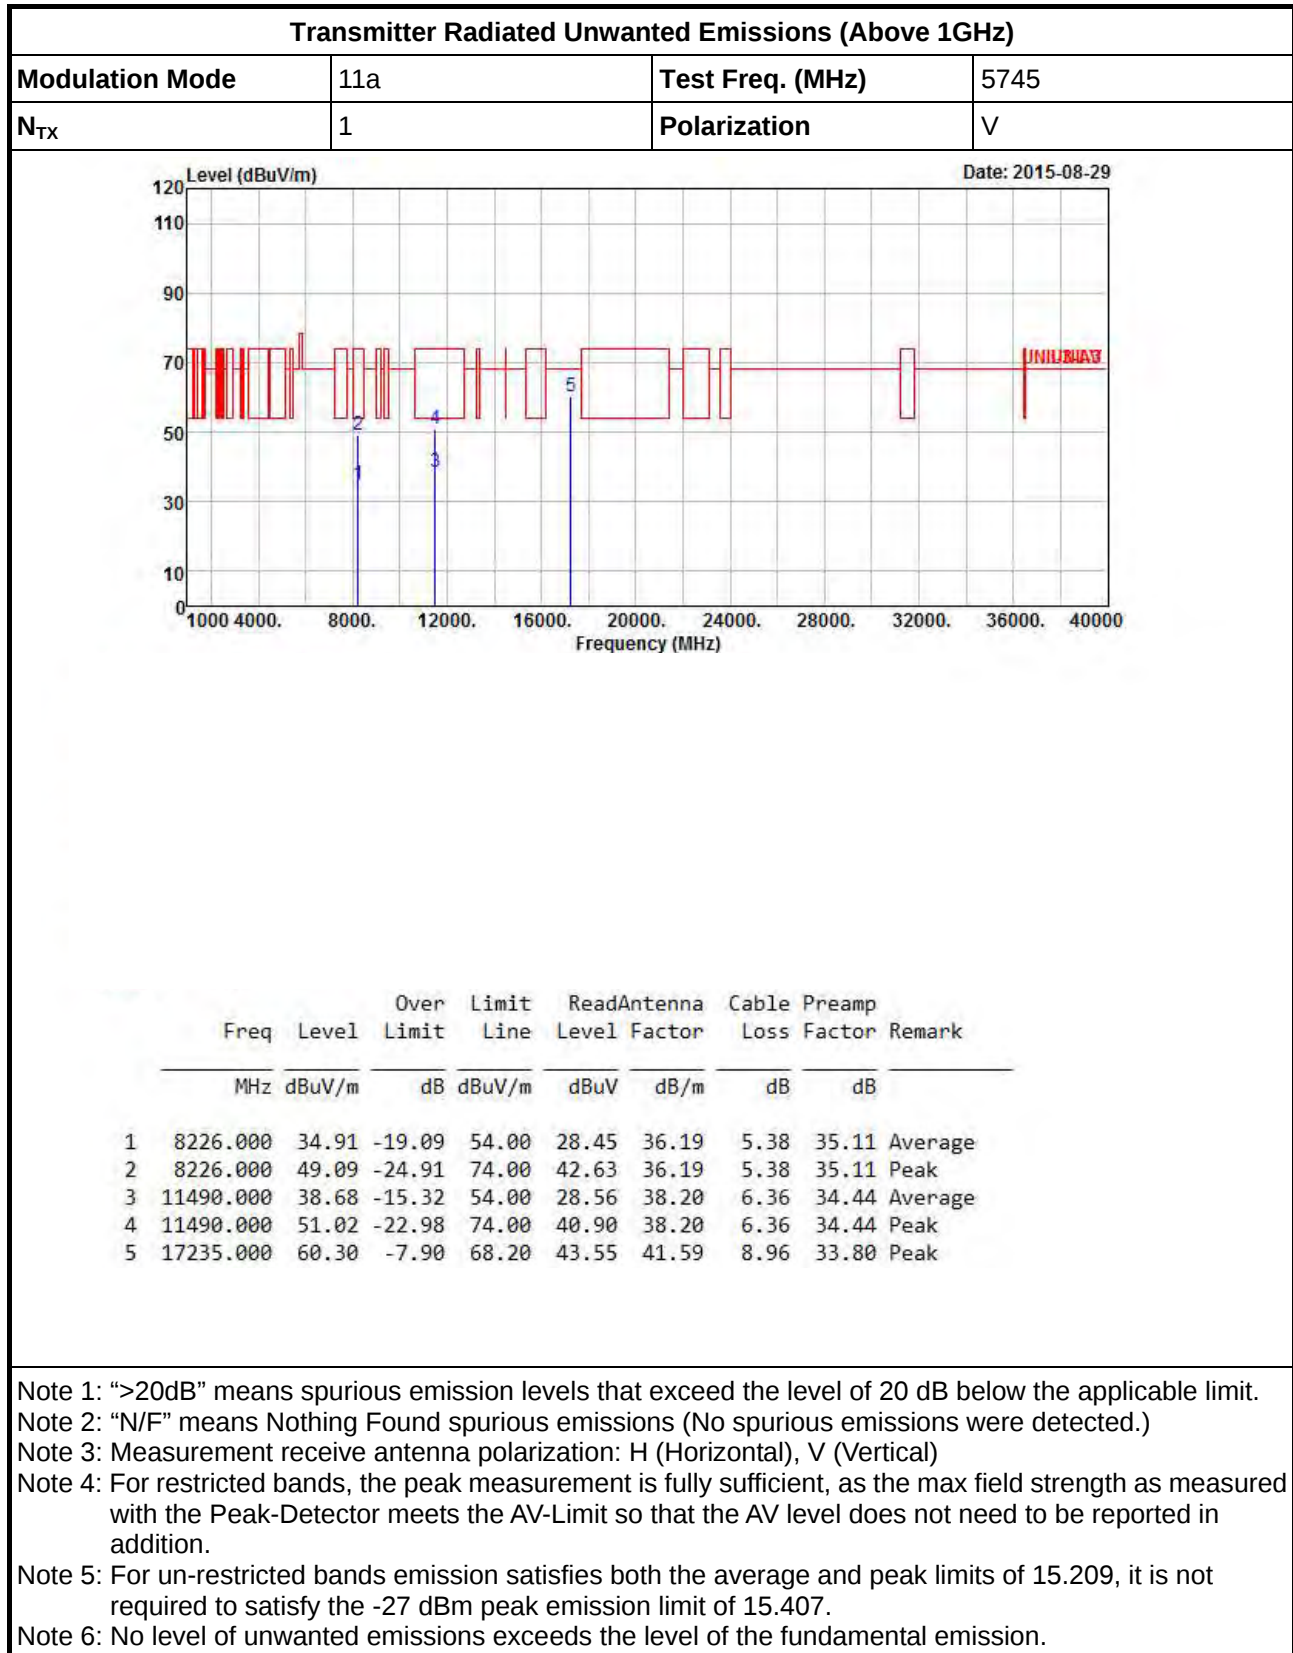

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

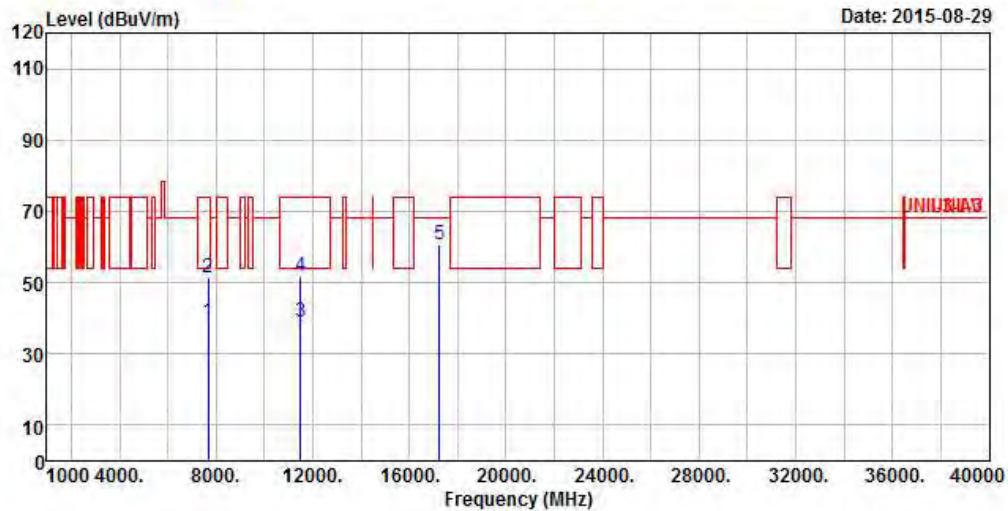

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7680.000	39.09	-14.91	54.00	32.51	36.04	5.58	35.04 Average
2	7680.000	51.37	-22.63	74.00	44.79	36.04	5.58	35.04 Peak
3	11490.000	38.85	-15.15	54.00	28.73	38.20	6.36	34.44 Average
4	11490.000	51.91	-22.09	74.00	41.79	38.20	6.36	34.44 Peak
5	17235.000	60.81	-7.39	68.20	44.06	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

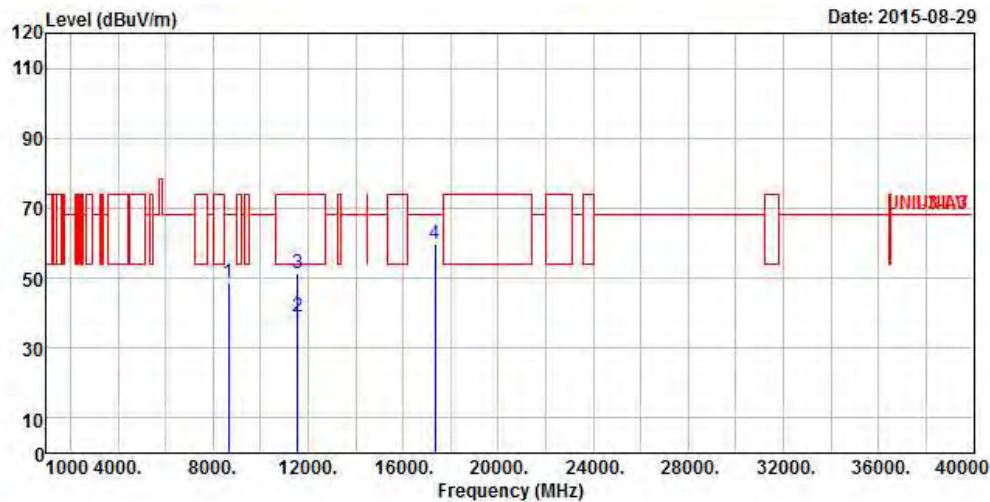

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Preamp Loss Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8644.000	48.75	-19.45	68.20	41.89	36.33	5.62	35.09 Peak
2	11570.000	38.77	-15.23	54.00	28.47	38.37	6.44	34.51 Average
3	11570.000	51.34	-22.66	74.00	41.04	38.37	6.44	34.51 Peak
4	17355.000	59.87	-8.33	68.20	43.07	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

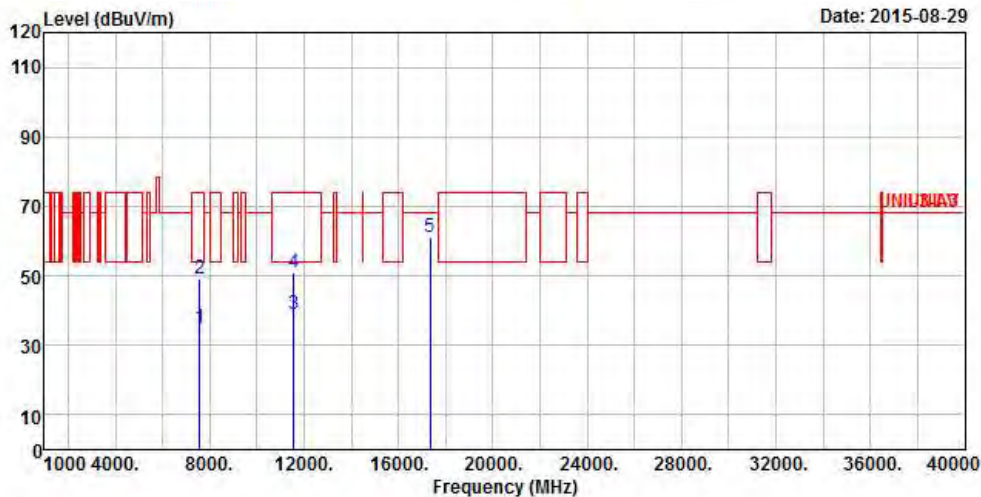

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7588.000	35.03	-18.97	54.00	28.37	36.02	5.64	35.00 Average
2	7588.000	49.37	-24.63	74.00	42.71	36.02	5.64	35.00 Peak
3	11570.000	39.00	-15.00	54.00	28.70	38.37	6.44	34.51 Average
4	11570.000	51.08	-22.92	74.00	40.78	38.37	6.44	34.51 Peak
5	17355.000	61.22	-6.98	68.20	44.42	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

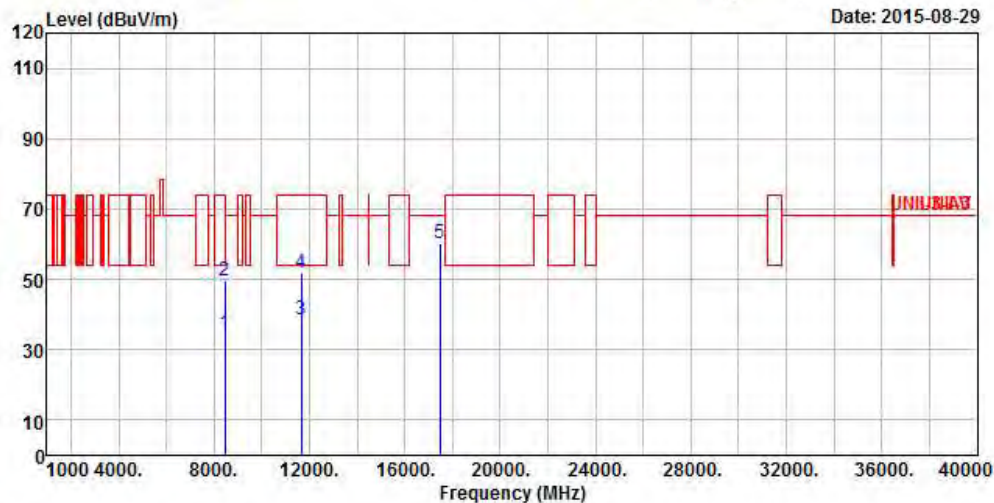

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8446.000	34.68	-19.32	54.00	28.02	36.28	5.45	35.07 Average
2	8446.000	49.54	-24.46	74.00	42.88	36.28	5.45	35.07 Peak
3	11650.000	38.71	-15.29	54.00	28.21	38.53	6.52	34.55 Average
4	11650.000	51.72	-22.28	74.00	41.22	38.53	6.52	34.55 Peak
5	17475.000	60.38	-7.82	68.20	43.52	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

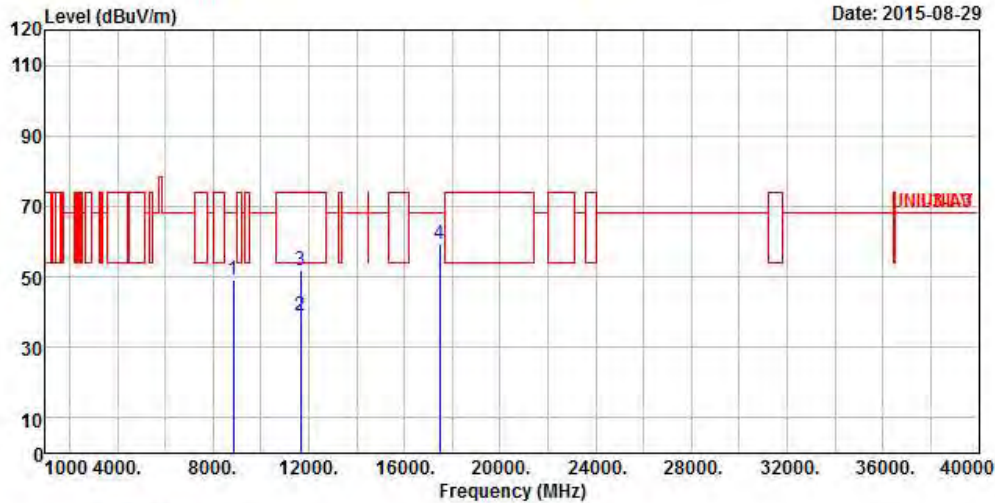

	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Remark
					dBuV	dB/m	dB	dB
1	8864.000	49.35	-18.85	68.20	42.24	36.37	5.86	35.12 Peak
2	11650.000	38.80	-15.20	54.00	28.30	38.53	6.52	34.55 Average
3	11650.000	51.77	-22.23	74.00	41.27	38.53	6.52	34.55 Peak
4	17475.000	59.15	-9.05	68.20	42.29	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	V

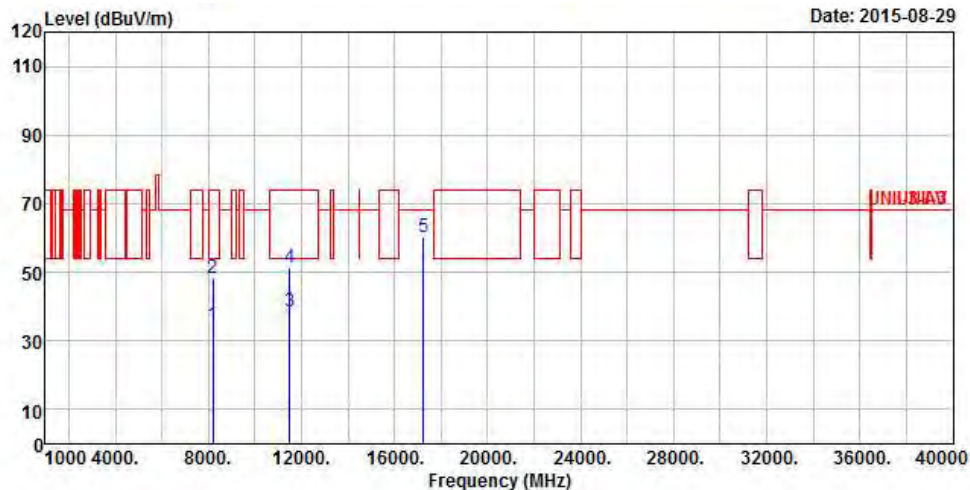

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8204.000	34.71	-19.29	54.00	28.26	36.18	5.38	35.11 Average
2	8204.000	48.15	-25.85	74.00	41.70	36.18	5.38	35.11 Peak
3	11490.000	38.56	-15.44	54.00	28.44	38.20	6.36	34.44 Average
4	11490.000	51.18	-22.82	74.00	41.06	38.20	6.36	34.44 Peak
5	17235.000	60.02	-8.18	68.20	43.27	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

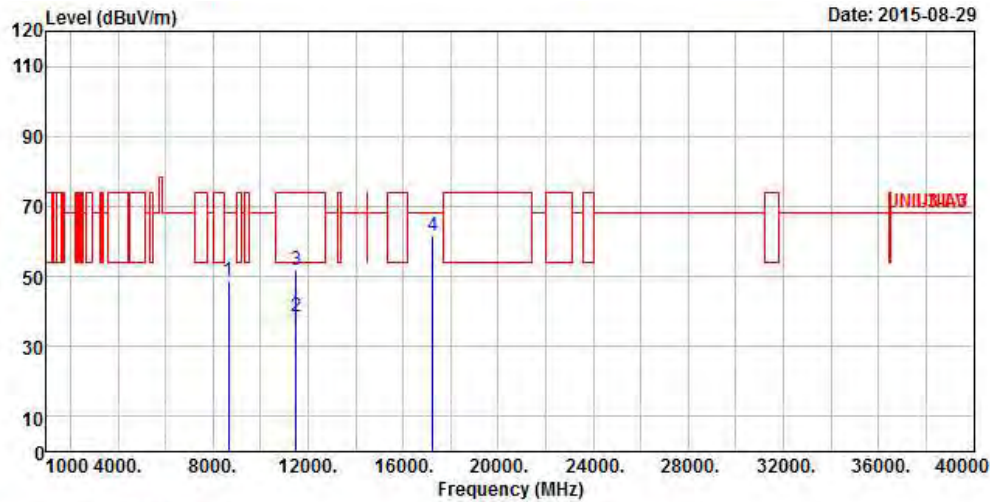

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8666.000	48.93	-19.27	68.20	42.03	36.33	5.66	35.09 Peak
2	11490.000	38.32	-15.68	54.00	28.20	38.20	6.36	34.44 Average
3	11490.000	51.67	-22.33	74.00	41.55	38.20	6.36	34.44 Peak
4	17235.000	61.50	-6.70	68.20	44.75	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

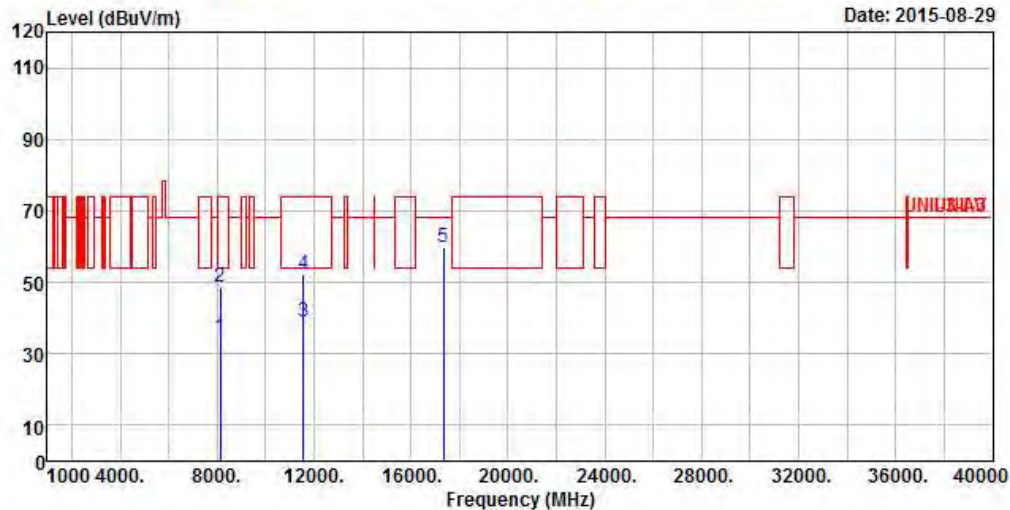

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8138.000	34.53	-19.47	54.00	28.13	36.16	5.36	35.12 Average
2	8138.000	48.85	-25.15	74.00	42.45	36.16	5.36	35.12 Peak
3	11570.000	38.76	-15.24	54.00	28.46	38.37	6.44	34.51 Average
4	11570.000	52.21	-21.79	74.00	41.91	38.37	6.44	34.51 Peak
5	17355.000	59.96	-8.24	68.20	43.16	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

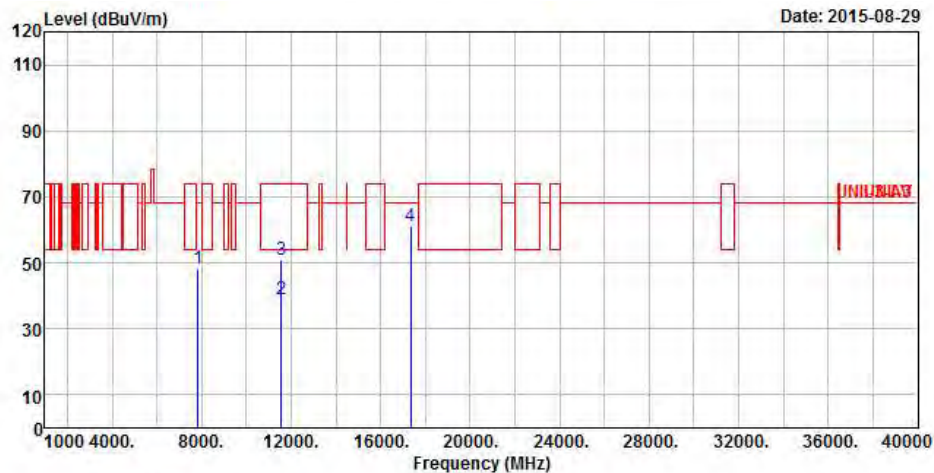

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7852.000	48.45	-19.75	68.20	42.06	36.07	5.41	35.09 Peak
2	11570.000	38.97	-15.03	54.00	28.67	38.37	6.44	34.51 Average
3	11570.000	51.00	-23.00	74.00	40.70	38.37	6.44	34.51 Peak
4	17355.000	61.01	-7.19	68.20	44.21	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

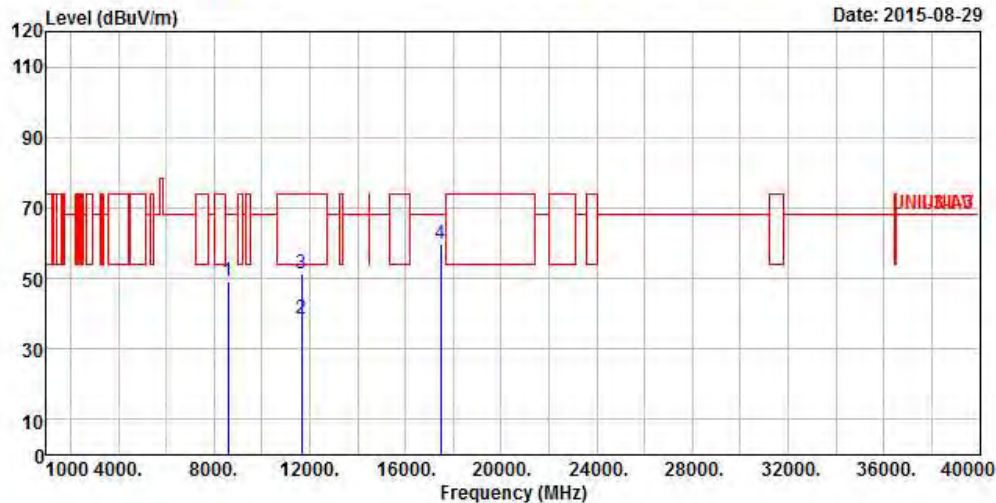

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8600.000	49.01	-19.19	68.20	42.19	36.32	5.58	35.08 Peak
2	11650.000	38.59	-15.41	54.00	28.09	38.53	6.52	34.55 Average
3	11650.000	51.24	-22.76	74.00	40.74	38.53	6.52	34.55 Peak
4	17475.000	59.70	-8.50	68.20	42.84	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

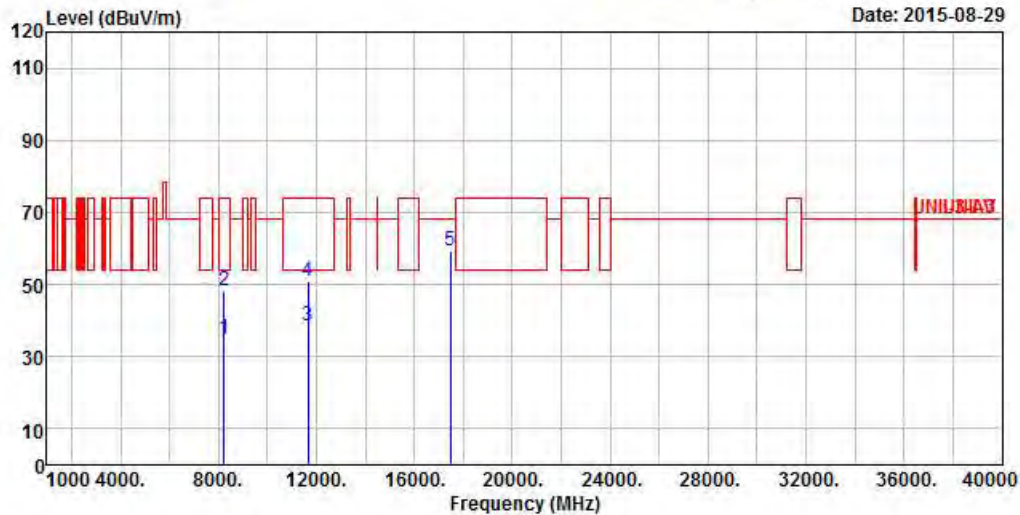

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8226.000	34.90	-19.10	54.00	28.44	36.19	5.38	35.11 Average
2	8226.000	48.11	-25.89	74.00	41.65	36.19	5.38	35.11 Peak
3	11650.000	38.65	-15.35	54.00	28.15	38.53	6.52	34.55 Average
4	11650.000	51.08	-22.92	74.00	40.58	38.53	6.52	34.55 Peak
5	17475.000	59.37	-8.83	68.20	42.51	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

3.6.12 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz– PIFA Antenna

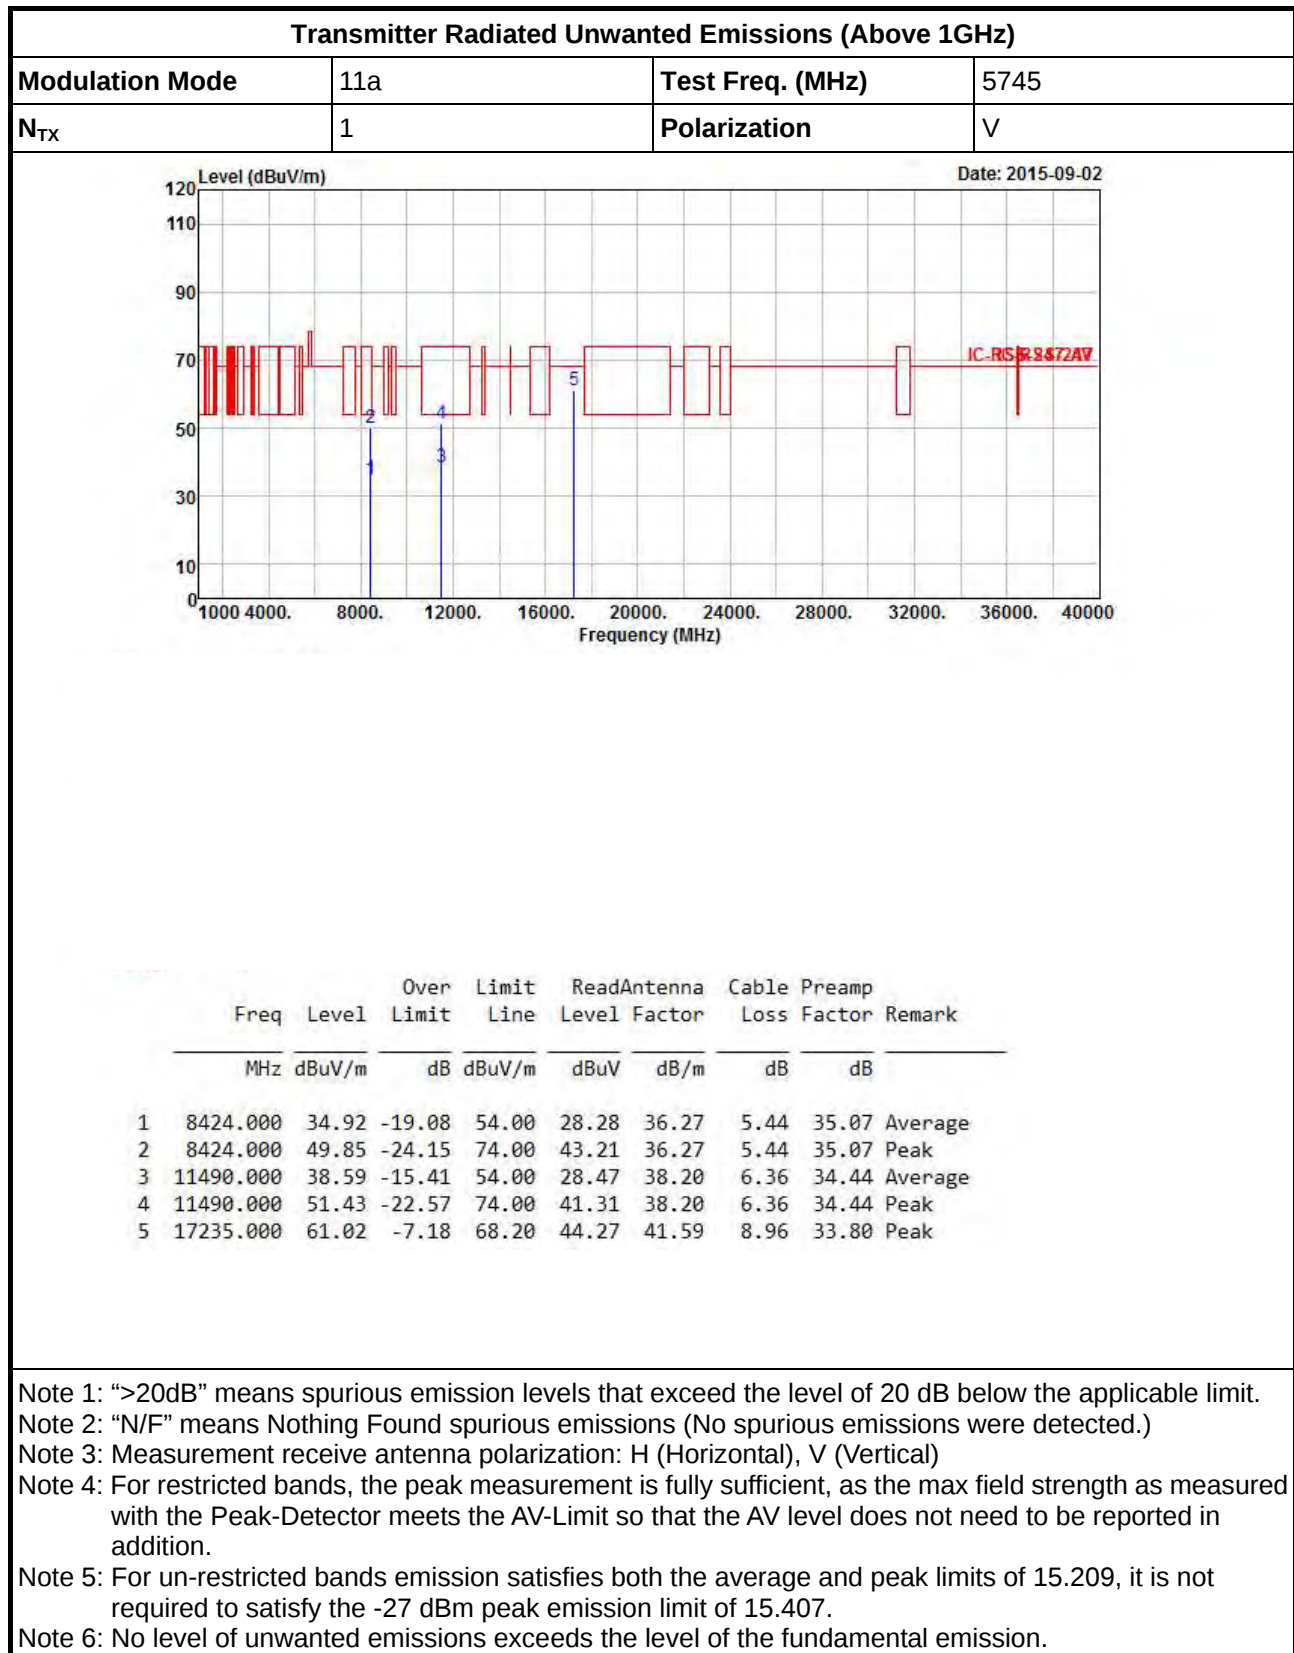

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

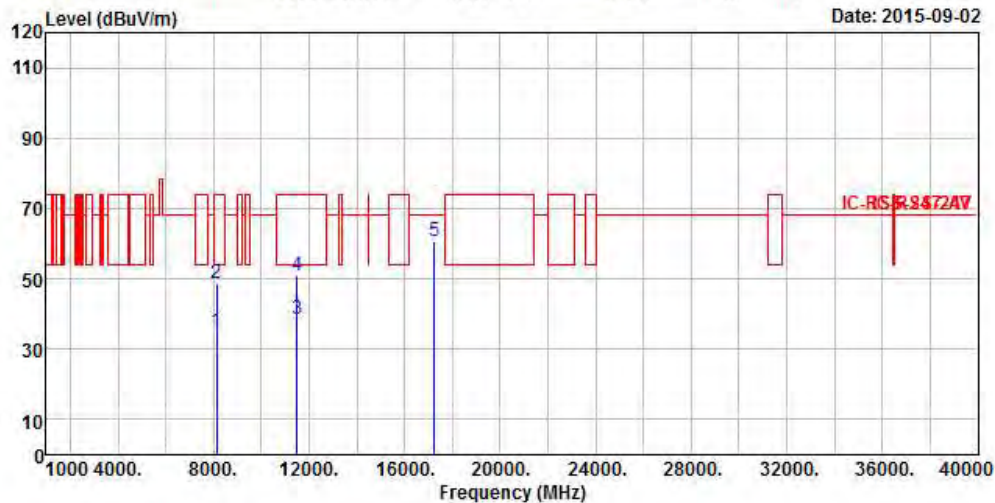

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8138.000	35.10	-18.90	54.00	28.70	36.16	5.36	35.12 Average
2	8138.000	48.62	-25.38	74.00	42.22	36.16	5.36	35.12 Peak
3	11490.000	38.65	-15.35	54.00	28.53	38.20	6.36	34.44 Average
4	11490.000	51.09	-22.91	74.00	40.97	38.20	6.36	34.44 Peak
5	17235.000	60.74	-7.46	68.20	43.99	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

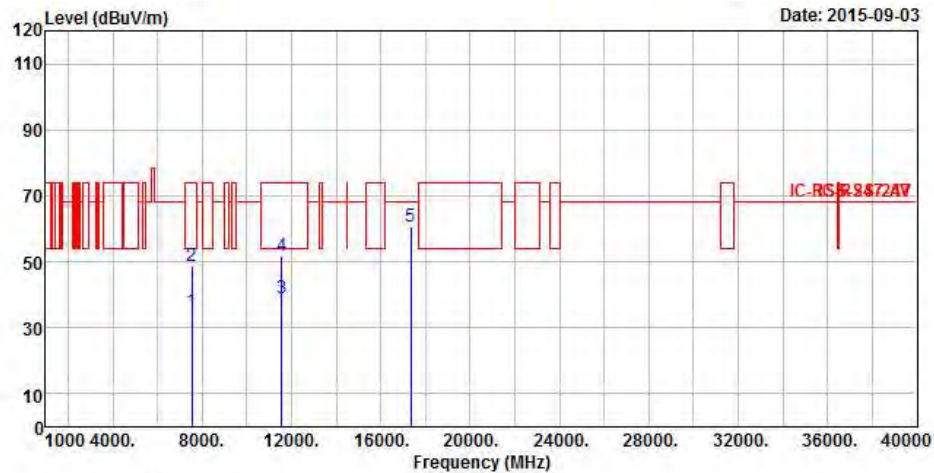

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Factor	Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7544.000	34.94	-19.06	54.00	28.25	36.01	5.68	35.00	Average
2	7544.000	48.87	-25.13	74.00	42.18	36.01	5.68	35.00	Peak
3	11570.000	38.97	-15.03	54.00	28.67	38.37	6.44	34.51	Average
4	11570.000	52.03	-21.97	74.00	41.73	38.37	6.44	34.51	Peak
5	17355.000	60.48	-7.72	68.20	43.68	41.64	8.94	33.78	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

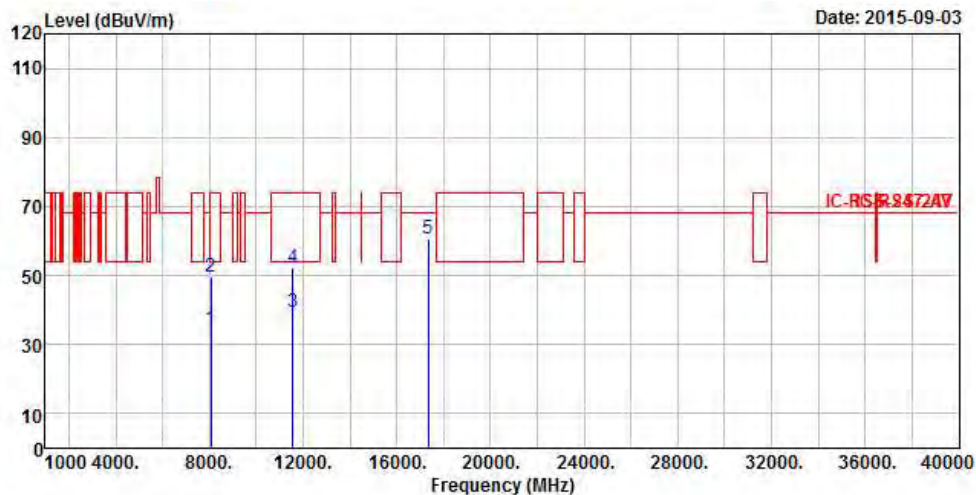


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8072.000	34.63	-19.37	54.00	28.30	36.13	5.33	35.13	Average
2	8072.000	49.57	-24.43	74.00	43.24	36.13	5.33	35.13	Peak
3	11570.000	39.55	-14.45	54.00	29.25	38.37	6.44	34.51	Average
4	11570.000	52.40	-21.60	74.00	42.10	38.37	6.44	34.51	Peak
5	17355.000	60.72	-7.48	68.20	43.92	41.64	8.94	33.78	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

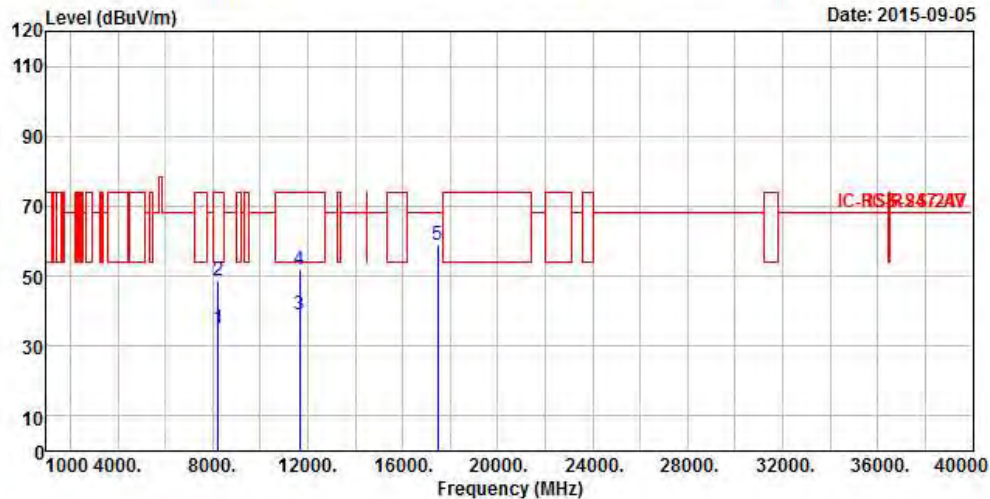

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8226.000	34.78	-19.22	54.00	28.32	36.19	5.38	35.11 Average
2	8226.000	48.92	-25.08	74.00	42.46	36.19	5.38	35.11 Peak
3	11650.000	39.07	-14.93	54.00	28.57	38.53	6.52	34.55 Average
4	11650.000	51.69	-22.31	74.00	41.19	38.53	6.52	34.55 Peak
5	17475.000	58.83	-9.37	68.20	41.97	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

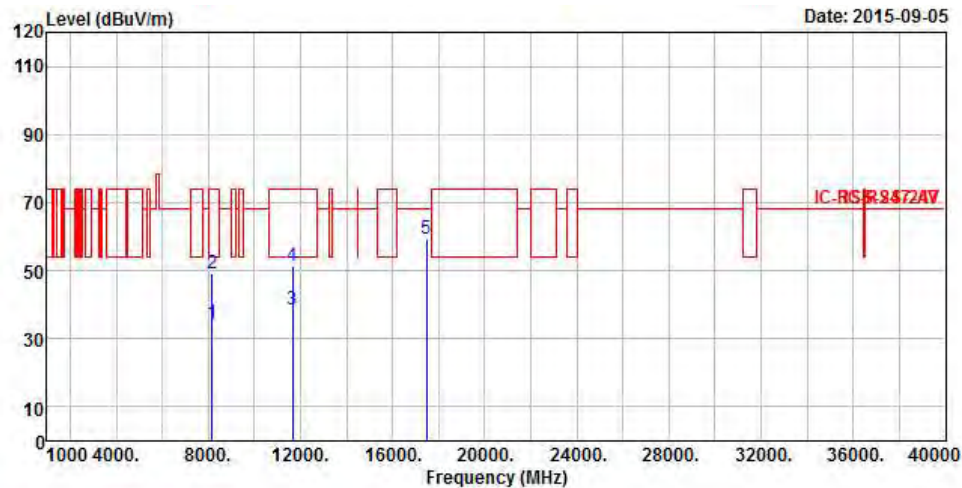

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8160.000	34.64	-19.36	54.00	28.22	36.16	5.37	35.11 Average
2	8160.000	49.27	-24.73	74.00	42.85	36.16	5.37	35.11 Peak
3	11650.000	38.73	-15.27	54.00	28.23	38.53	6.52	34.55 Average
4	11650.000	51.58	-22.42	74.00	41.08	38.53	6.52	34.55 Peak
5	17475.000	59.51	-8.69	68.20	42.65	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	V

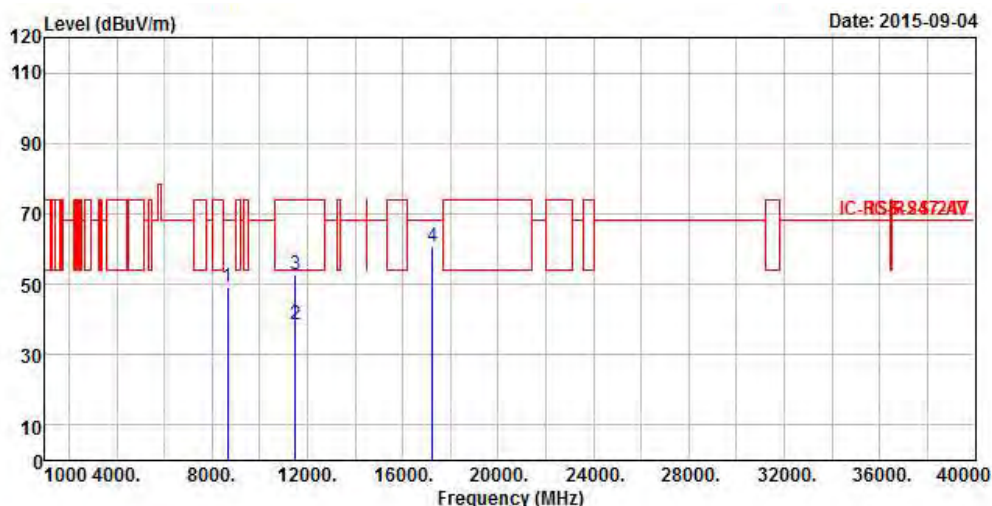

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8644.000	48.94	-19.26	68.20	42.08	36.33	5.62	35.09 Peak
2	11490.000	38.46	-15.54	54.00	28.34	38.20	6.36	34.44 Average
3	11490.000	52.91	-21.09	74.00	42.79	38.20	6.36	34.44 Peak
4	17235.000	60.52	-7.68	68.20	43.77	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

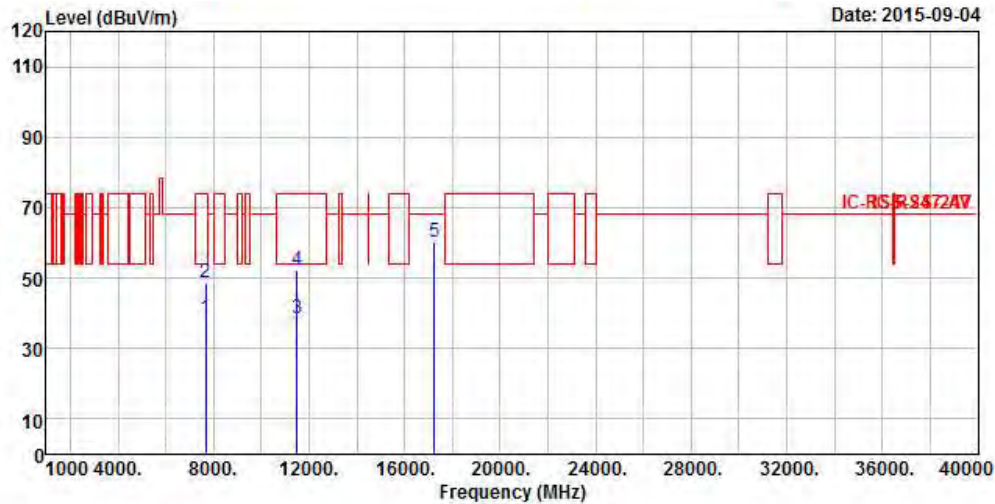

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7676.000	38.49	-15.51	54.00	31.91	36.04	5.58	35.04 Average
2	7676.000	48.64	-25.36	74.00	42.06	36.04	5.58	35.04 Peak
3	11490.000	38.63	-15.37	54.00	28.51	38.20	6.36	34.44 Average
4	11490.000	52.11	-21.89	74.00	41.99	38.20	6.36	34.44 Peak
5	17235.000	60.27	-7.93	68.20	43.52	41.59	8.96	33.80 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

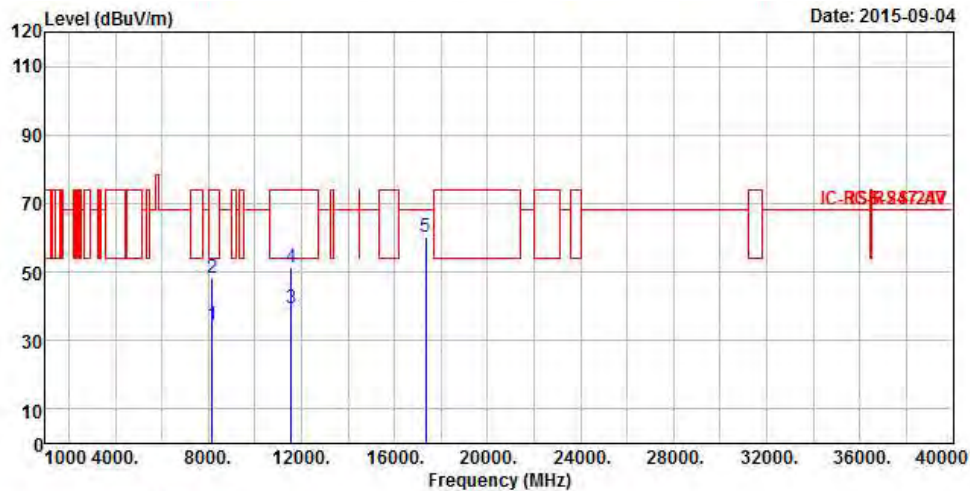

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8160.000	34.69	-19.31	54.00	28.27	36.16	5.37	35.11 Average
2	8160.000	48.15	-25.85	74.00	41.73	36.16	5.37	35.11 Peak
3	11570.000	39.28	-14.72	54.00	28.98	38.37	6.44	34.51 Average
4	11570.000	51.38	-22.62	74.00	41.08	38.37	6.44	34.51 Peak
5	17355.000	60.04	-8.16	68.20	43.24	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

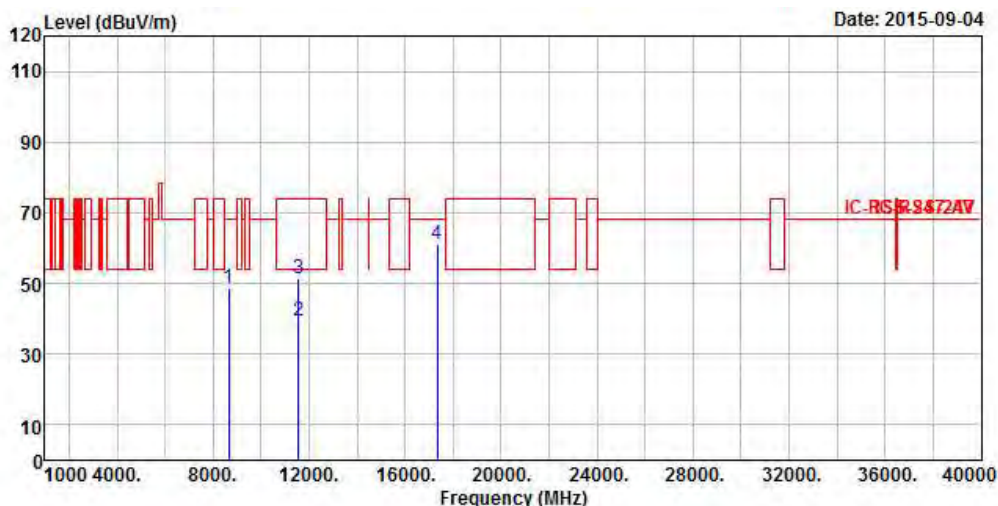

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8666.000	48.83	-19.37	68.20	41.93	36.33	5.66	35.09 Peak
2	11570.000	39.28	-14.72	54.00	28.98	38.37	6.44	34.51 Average
3	11570.000	51.58	-22.42	74.00	41.28	38.37	6.44	34.51 Peak
4	17355.000	61.29	-6.91	68.20	44.49	41.64	8.94	33.78 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

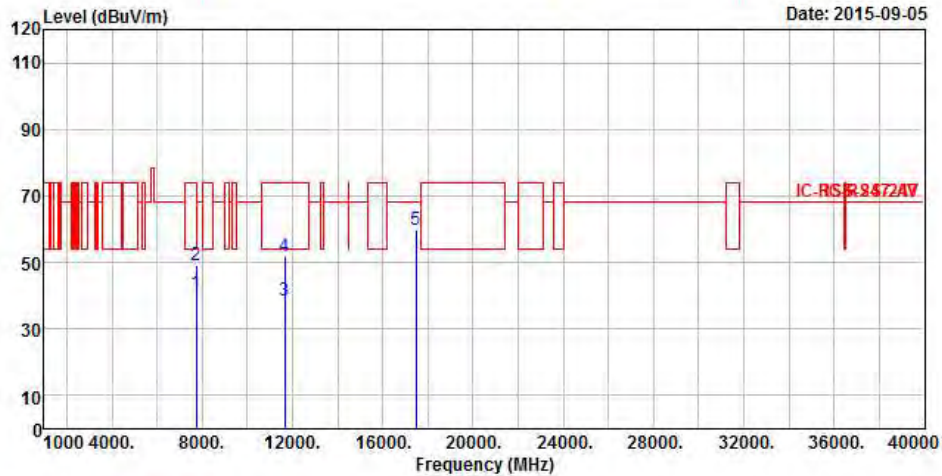

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7748.000	40.84	-13.16	54.00	34.34	36.05	5.51	35.06 Average
2	7748.000	49.36	-24.64	74.00	42.86	36.05	5.51	35.06 Peak
3	11650.000	38.65	-15.35	54.00	28.15	38.53	6.52	34.55 Average
4	11650.000	51.66	-22.34	74.00	41.16	38.53	6.52	34.55 Peak
5	17475.000	59.80	-8.40	68.20	42.94	41.69	8.92	33.75 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

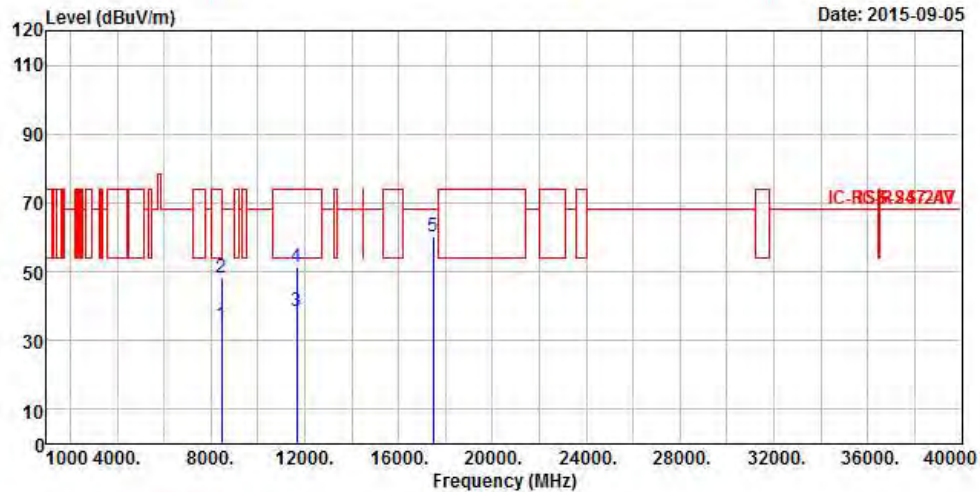

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8468.000	34.45	-19.55	54.00	27.77	36.29	5.45	35.06	Average
2	8468.000	48.07	-25.93	74.00	41.39	36.29	5.45	35.06	Peak
3	11650.000	38.51	-15.49	54.00	28.01	38.53	6.52	34.55	Average
4	11650.000	51.16	-22.84	74.00	40.66	38.53	6.52	34.55	Peak
5	17475.000	60.31	-7.89	68.20	43.45	41.69	8.92	33.75	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

3.7 Frequency Stability

3.7.1 Frequency Stability Limit

Frequency Stability Limit	
UNII Devices	
☒	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
IEEE Std. 802.11n-2009	
☒	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
☒	Frequency stability with respect to ambient temperature
☒	Frequency stability when varying supply voltage
☒	For conducted measurement.
☒	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
☐	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.7.4 Test Setup

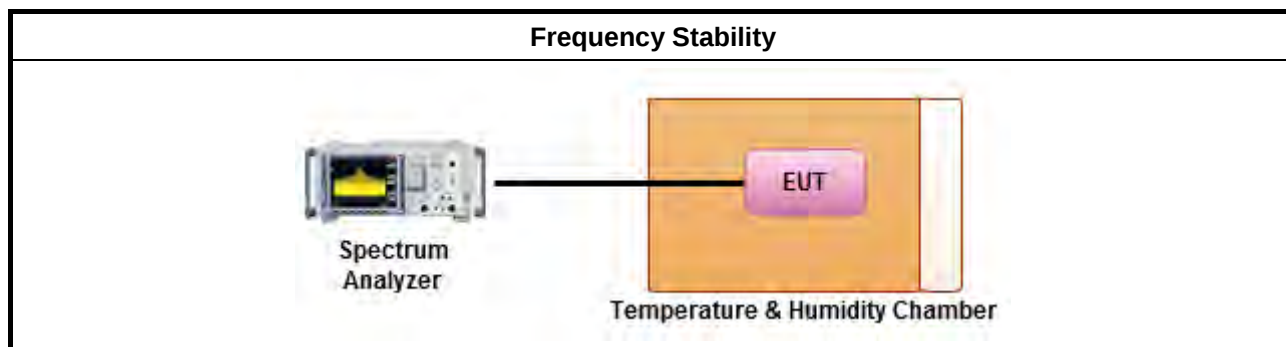

3.7.5 Test Result of Frequency Stability

Frequency Stability Result					
Mode		Frequency Stability (ppm)			
Condition	Freq. (MHz)	0 min	2 min	5 min	10 min
T _{20°C} Vmax	5200	-0.9231	-1.0385	-1.1538	-1.3846
T _{20°C} Vmin	5200	-0.6923	-0.8077	-1.0385	-1.1538
T _{50°C} Vnom	5200	0.3462	0.4615	0.6923	0.8077
T _{40°C} Vnom	5200	-2.5385	-2.4231	-2.1923	-2.0769
T _{30°C} Vnom	5200	-1.8462	-1.9615	-2.1923	-2.3077
T _{20°C} Vnom	5200	-0.8077	-0.9231	-1.0385	-1.2692
T _{10°C} Vnom	5200	1.6154	1.3846	1.2692	1.0385
T _{0°C} Vnom	5200	4.3846	4.2692	4.0385	3.9231
T _{-10°C} Vnom	5200	6.8077	6.5769	6.4615	6.3462
T _{-20°C} Vnom	5200	7.9615	8.0769	8.1923	8.4231
Limit (ppm)		±20			
Result		Complied			
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom].					
Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.					

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 15, 2015	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 22, 2015	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	NCR	AC Conduction

Note: Calibration Interval of instruments listed above is one year. NCR: No Calibration Request.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	May 06, 2015	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 28, 2015	RF Conducted
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 29, 2015	RF Conducted
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 29, 2015	RF Conducted
DC Power Source	G.W.	GPS-3030DD	GEN865896	DC 0V ~ 30V	Jan. 16, 2015	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 20, 2014	Radiation
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 03, 2015	Radiation
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	1GHz ~ 6GHz 3m	Mar 17, 2015	Radiation
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	Jul. 24, 2015	Radiation
Amplifier	Agilent	8449B	3008A02602	1GHz ~ 26.5GHz	Oct. 20, 2014	Radiation
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 28, 2014	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 27, 2015	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 08, 2014	Radiation
RF Cable-high	SUHNER	SUCOFLEX106	MY17173/4	1GHz ~ 40GHz	Mar. 04, 2015	Radiation
Bilog Antenna	SCHAFFNER	CBL 6112B	2723	30MHz ~ 1GHz	Oct. 05, 2015	Radiation
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EMC INSTRUMENTS	EMC184045B	980192	18GHz ~ 40GHz	Aug. 25, 2014	Radiation
Loop Antenna	R&S	HFH2-Z2	100330	9 kHz~30 MHz	Nov. 10, 2014	Radiation

Note: Calibration Interval of instruments listed above is two year.