

System Check-D750V2_H750**DUT: Dipole 750 MHz D750V3 SN:1066**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.112$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 750 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.77 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.87 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.39 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 2.86 W/kg

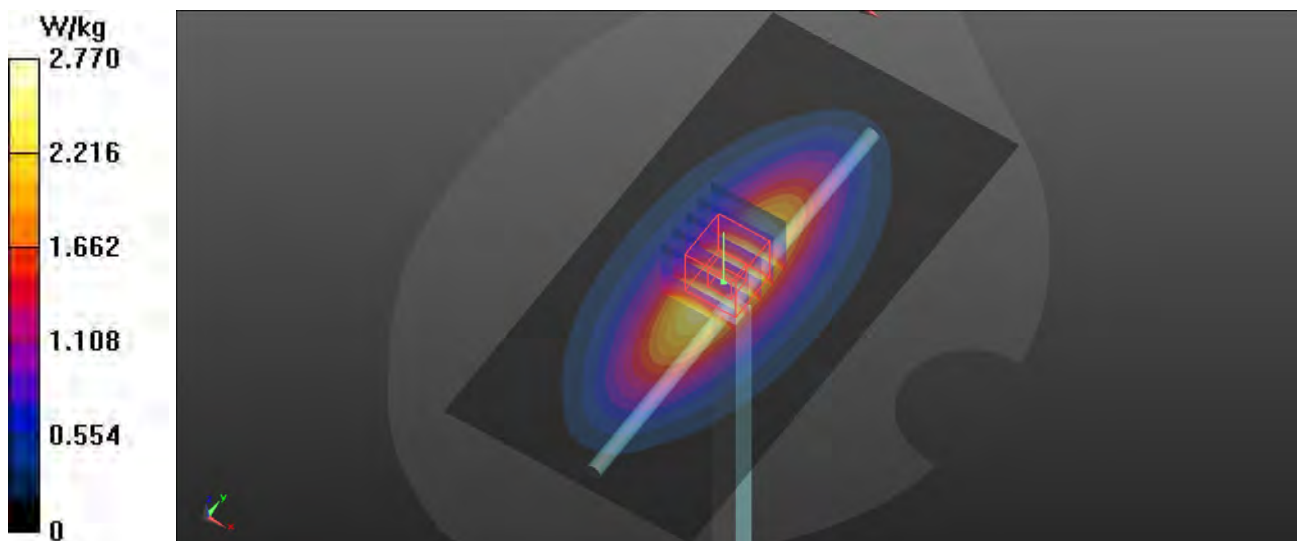

System Check-D750V2_H750**DUT: Dipole 750 MHz D750V3 SN:1066**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 40.59$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 750 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.74 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.32 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.38 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 66.1%

Maximum value of SAR (measured) = 2.81 W/kg

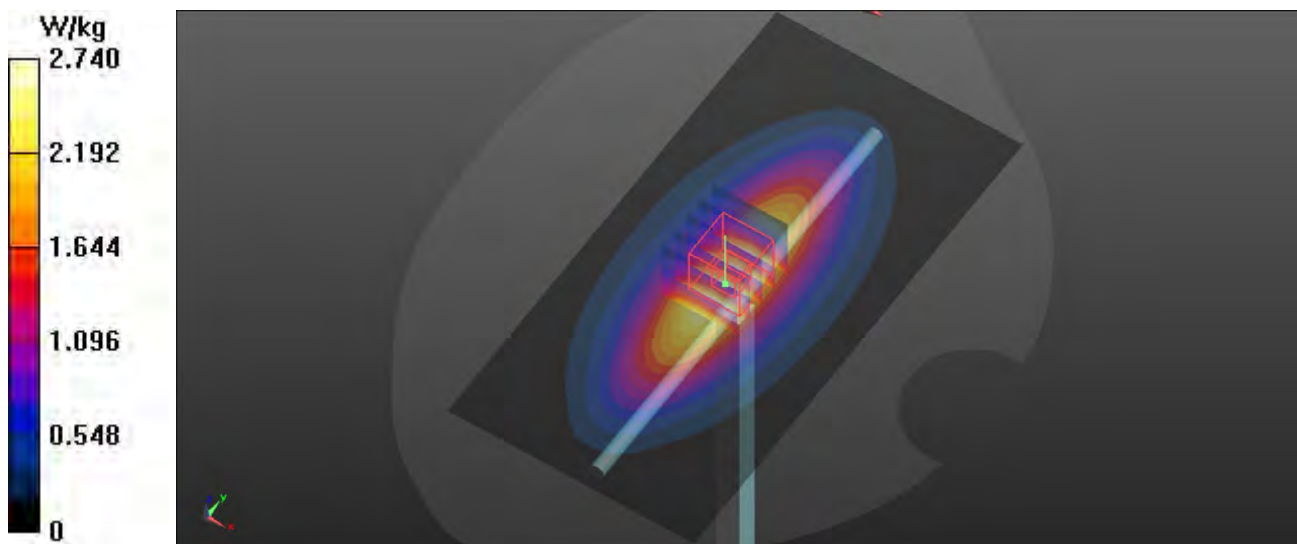

System Check-D750V2_H750**DUT: Dipole 750 MHz D750V3 SN:1066**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 40.512$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 750 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.74 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.45 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.46 W/kg

Smallest distance from peaks to all points 3 dB below = 20.5 mm

Ratio of SAR at M2 to SAR at M1 = 71.1%

Maximum value of SAR (measured) = 2.75 W/kg

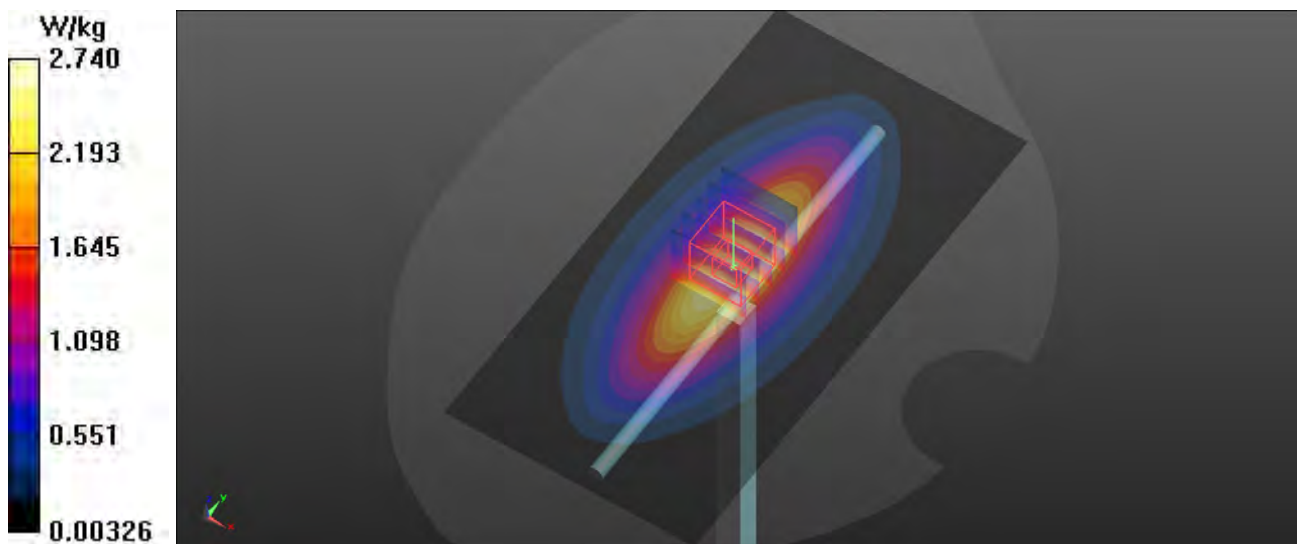

System Check-D750V2_H750**DUT: Dipole 750 MHz D750V3 SN:1066**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 40.142$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 750 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.72 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.80 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.37 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 2.78 W/kg

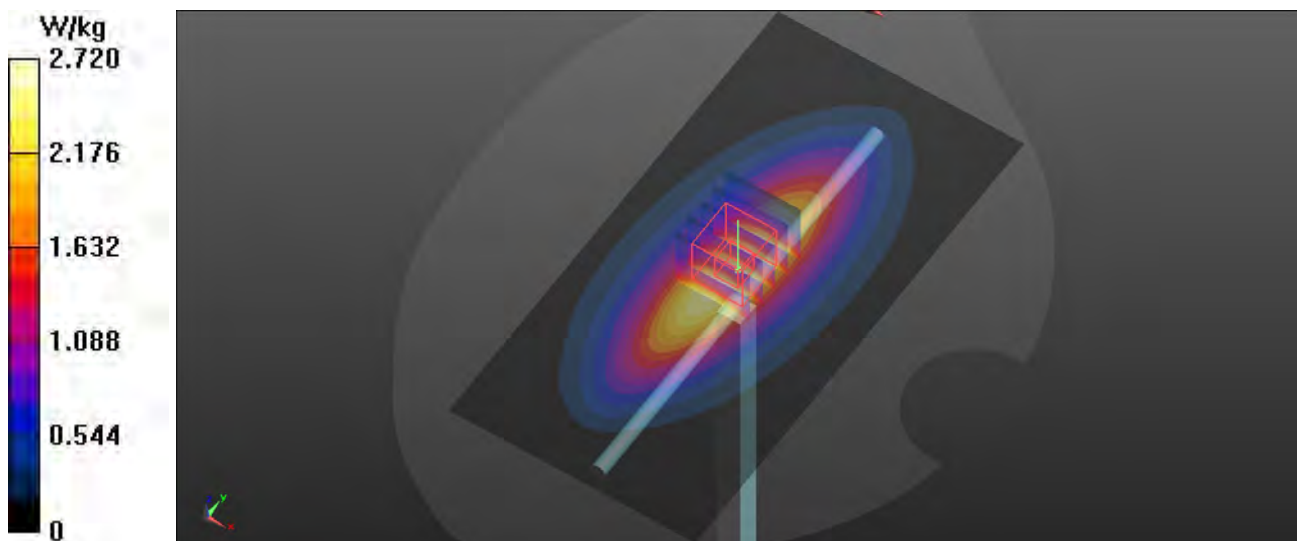

System Check-D835V2_H835**DUT: Dipole 835 MHz D835V2 SN:4d242**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 40.887$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 835 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.34 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.84 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 2.53 W/kg; SAR(10 g) = 1.66 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 3.38 W/kg

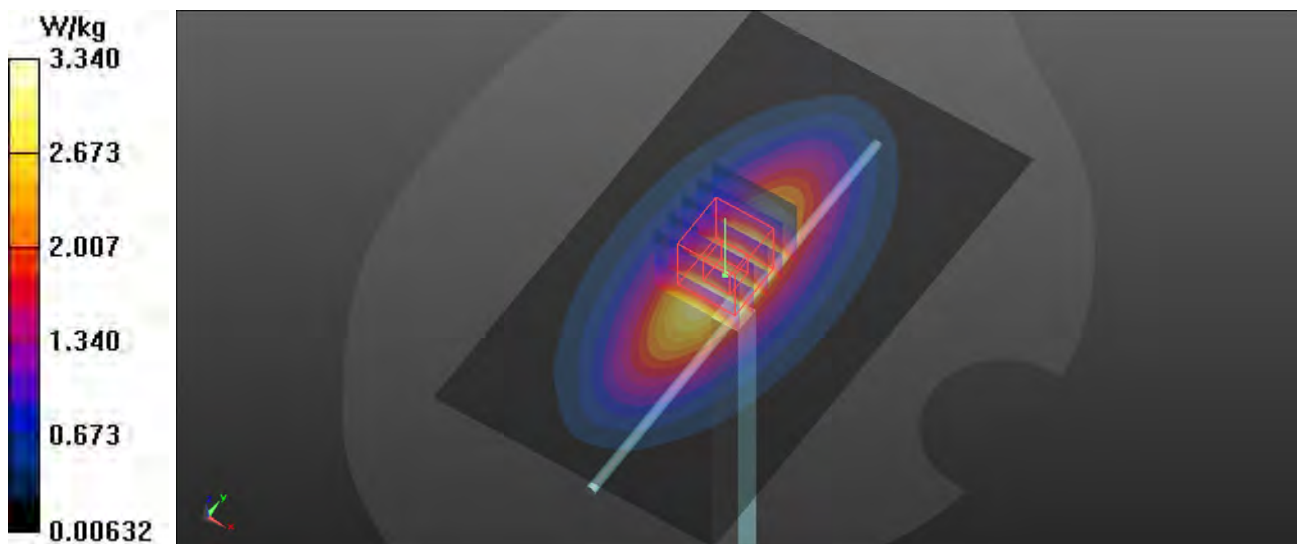

System Check-D835V2_H835**DUT: Dipole 835 MHz D835V2 SN:4d242**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.685$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 835 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.15 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.66 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.59 W/kg

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 3.21 W/kg

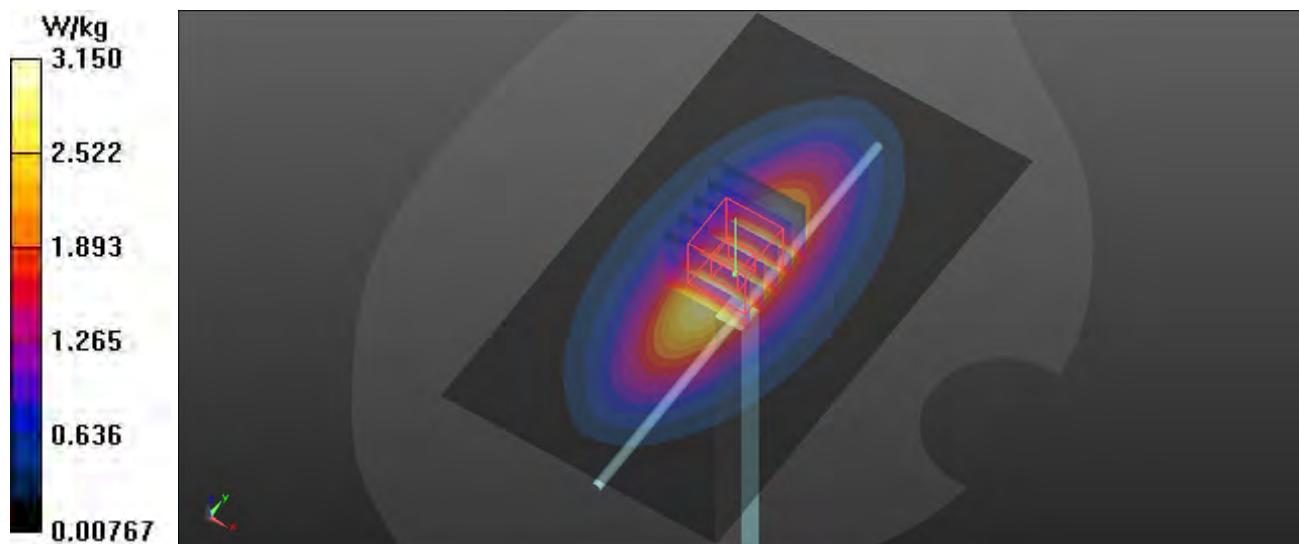

System Check-D900V2_H900

Dipole 900 MHz D900V2 SN:136

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: H900 Medium parameters used: $f = 900$ MHz; $\sigma = 0.946$ S/m; $\epsilon_r = 40.694$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.17, 6.17, 6.17) @ 900 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.43 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 65.09 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.98 W/kg

SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.75 W/kg

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.4%

Maximum value of SAR (measured) = 3.49 W/kg

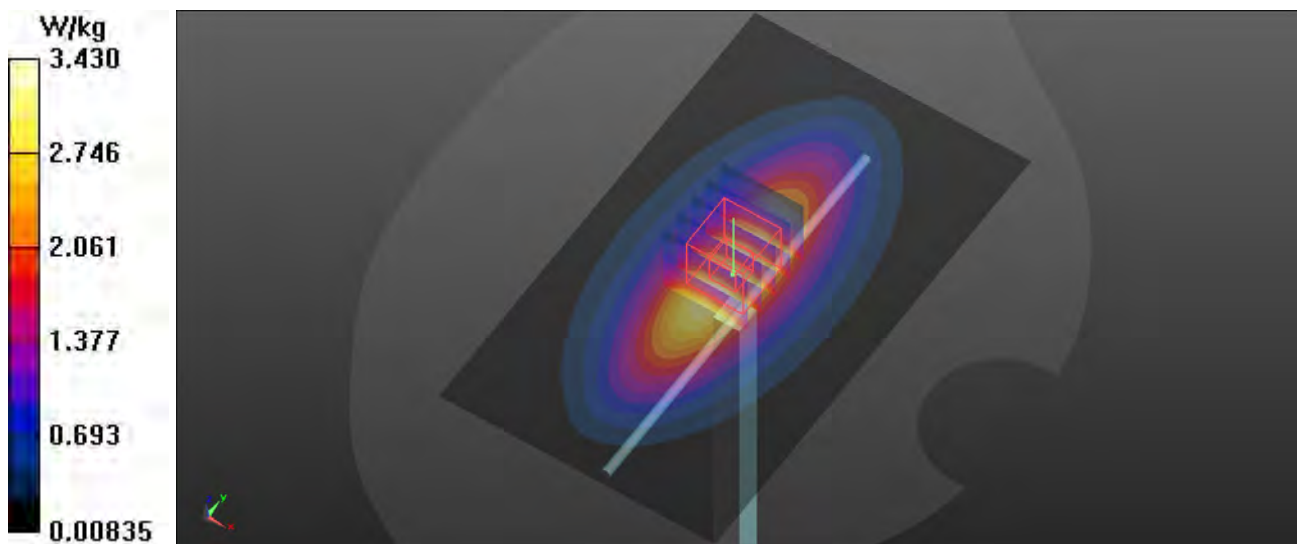

System Check-D1750V2_H1750**DUT: Dipole 1750 MHz D1750V2 SN:1086**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1


Medium: H1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 40.082$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1750 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.0 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 104.4 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 14.6 W/kg
SAR(1 g) = 9.07 W/kg; SAR(10 g) = 5.11 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 62.4%
Maximum value of SAR (measured) = 12.7 W/kg

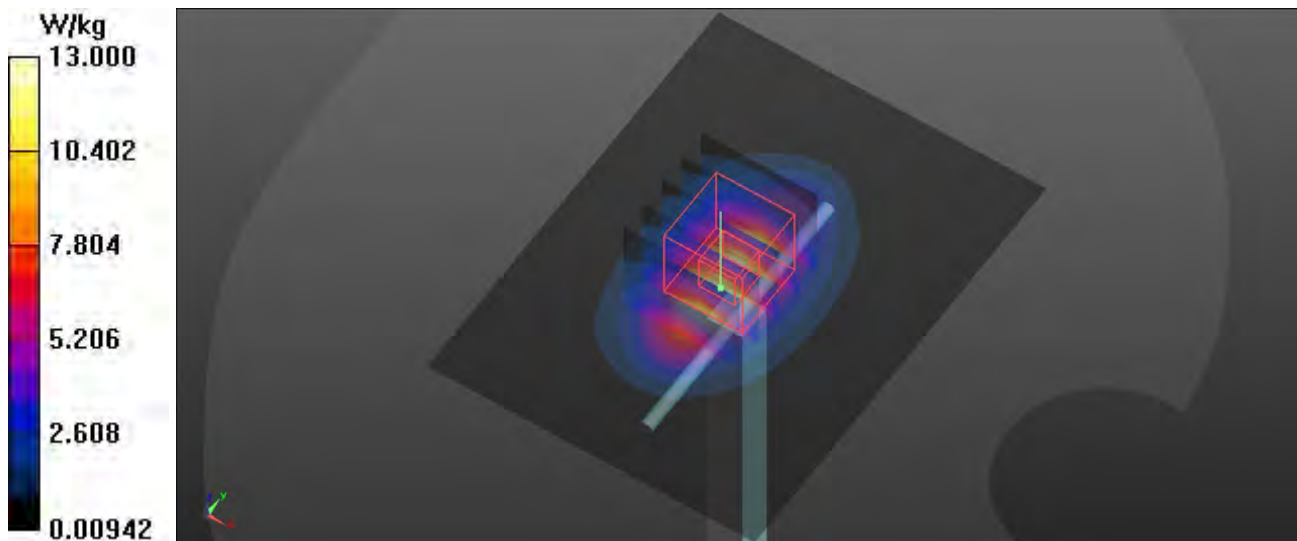

System Check-D1750V2_H1750**DUT: Dipole 1750 MHz D1750V2 SN:1086**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1


Medium: H1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.752$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1750 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 14.4 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 106.2 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 17.0 W/kg
SAR(1 g) = 9.32 W/kg; SAR(10 g) = 4.99 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 55%
Maximum value of SAR (measured) = 14.2 W/kg

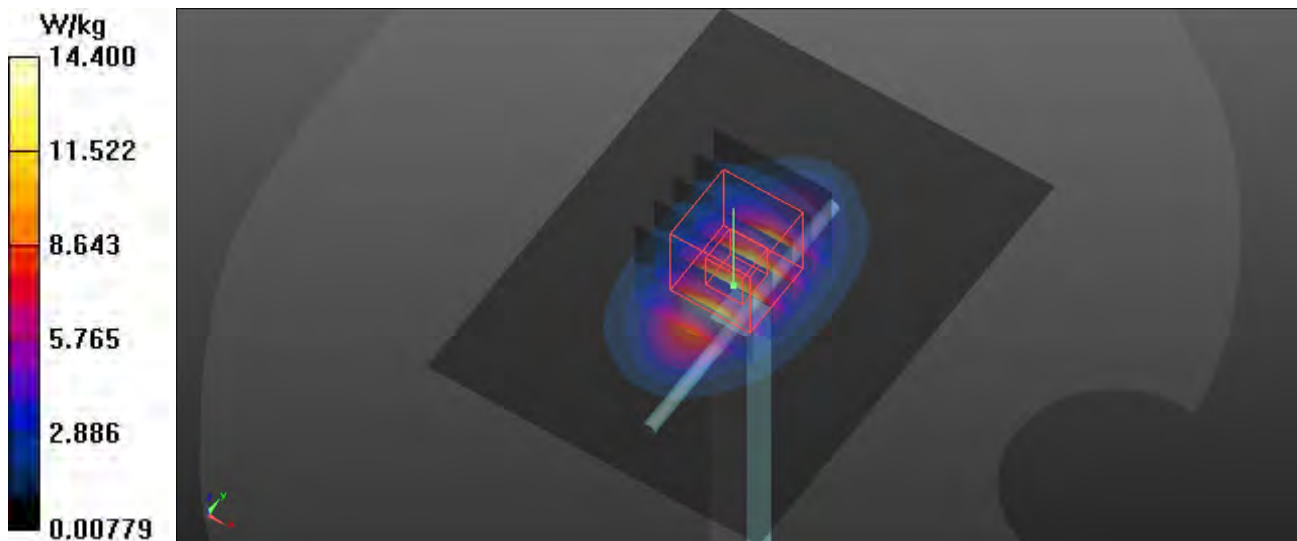

System Check-D1900V2_H1900

DUT: Dipole 1900 MHz D1900V2 SN:509

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.761$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1900 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 16.0 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 110.1 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 19.2 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.34 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 15.9 W/kg

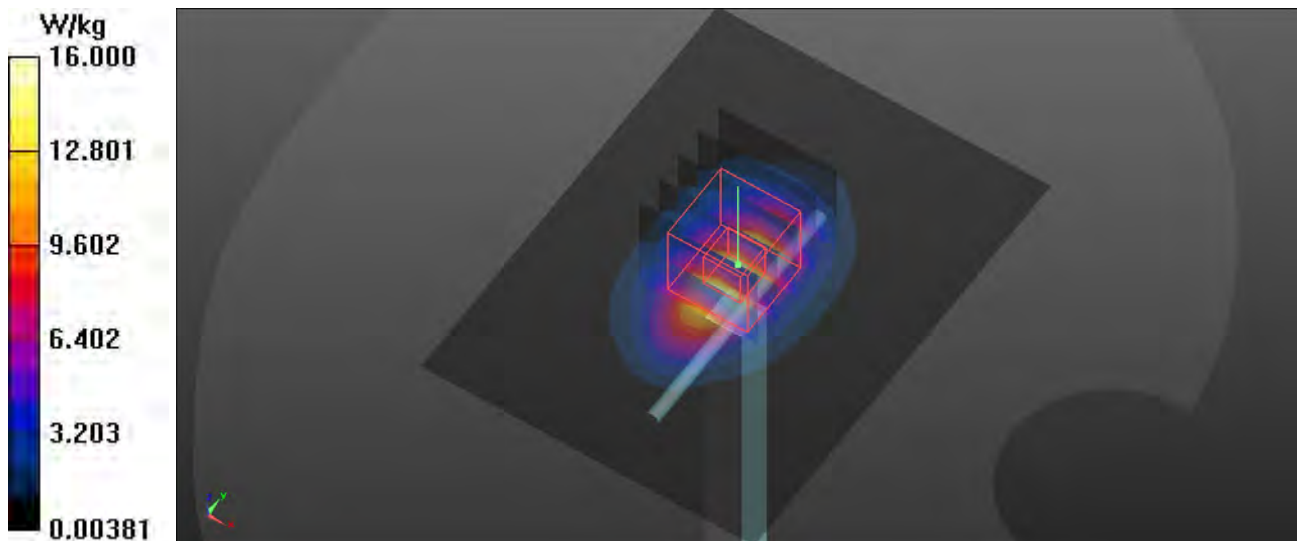

System Check-D1900V2_H1900**DUT: Dipole 1900 MHz D1900V2 SN:509**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1


Medium: H1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.734$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1900 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 15.6 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 106.2 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 18.9 W/kg
SAR(1 g) = 9.93 W/kg; SAR(10 g) = 5.1 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 52.9%
Maximum value of SAR (measured) = 15.5 W/kg

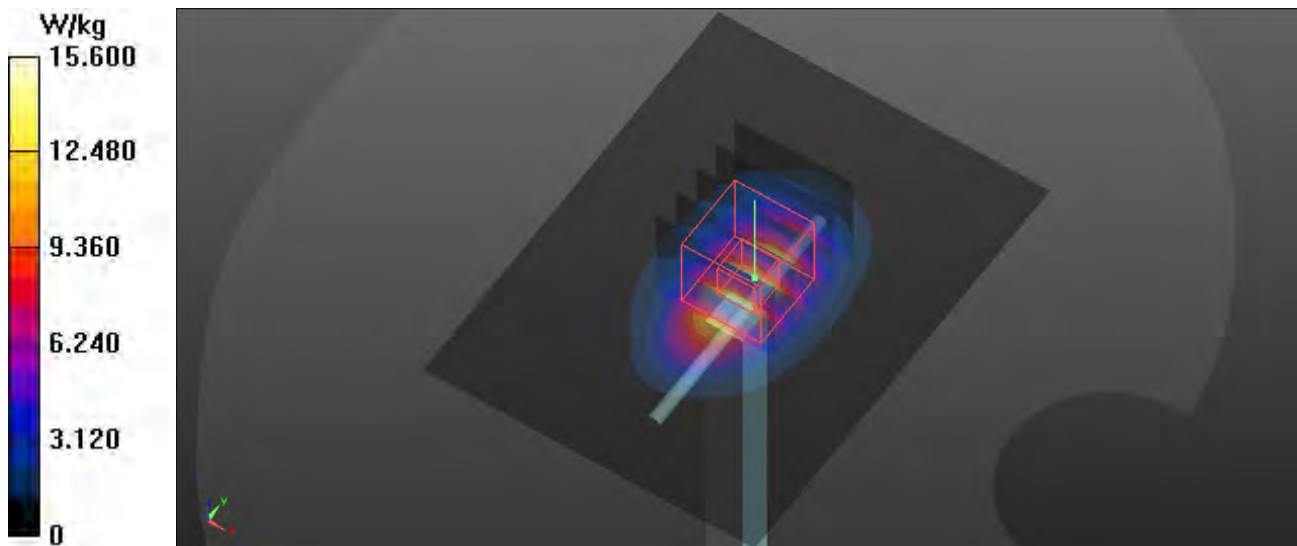

System Check-D1900V2_H1900

DUT: Dipole 1900 MHz D1900V2 SN:509

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1


Medium: H1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.019$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.33, 7.89, 7.28) @ 1900 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 15.4 W/kg

Pin=250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 104.9 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 18.6 W/kg
SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.01 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 52.8%
Maximum value of SAR (measured) = 15.4 W/kg

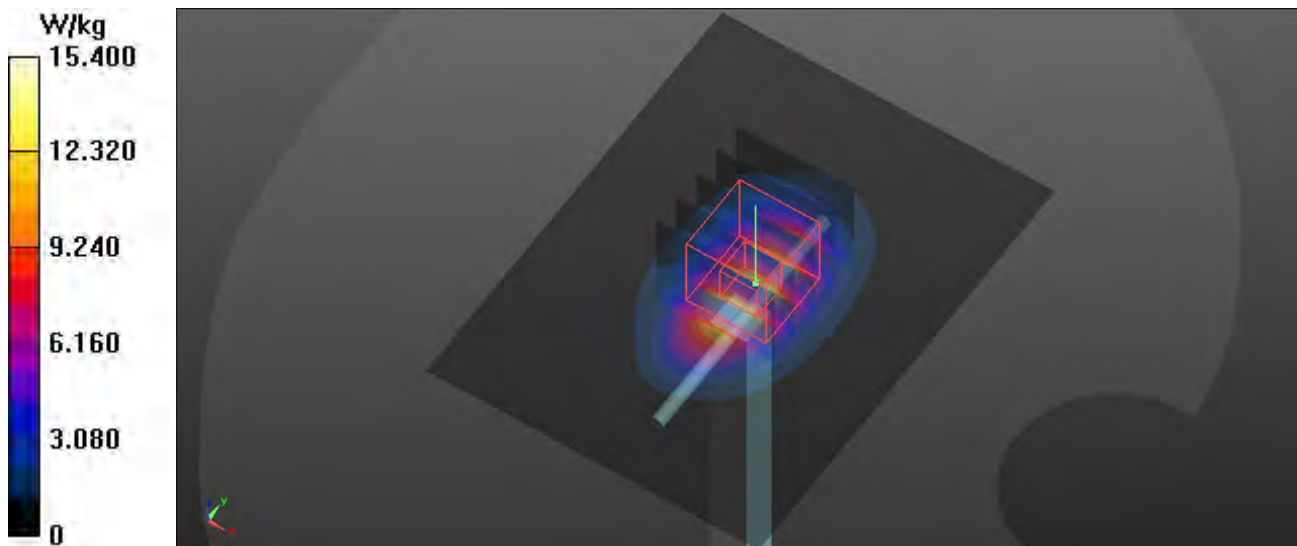

System Check-D2450V2_H2450**DUT: Dipole 2450 MHz D2450V2 SN:883**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.844$ S/m; $\epsilon_r = 39.408$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2450 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 22.7 W/kg

Pin=250 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.1 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.16 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 22.1 W/kg

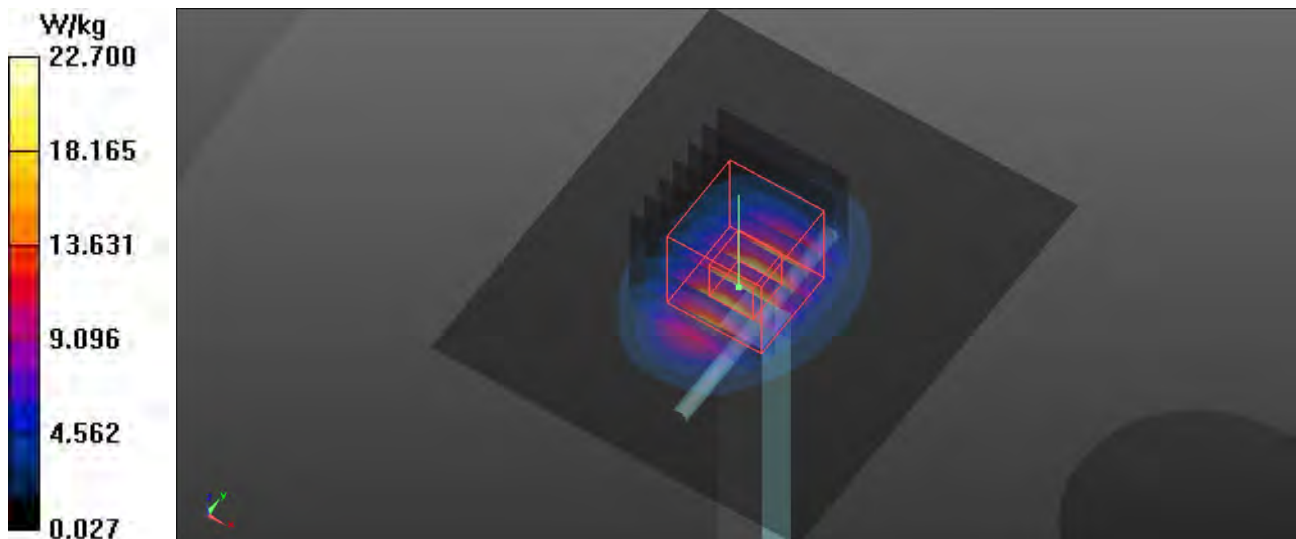

System Check-D2600V2_H2600**DUT: Dipole 2600 MHz D2600V2 SN:1082**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1


Medium: H2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.039$ S/m; $\epsilon_r = 38.932$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2600 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 25.1 W/kg

Pin=250 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 114.2 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 31.2 W/kg
SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.5 W/kg
Smallest distance from peaks to all points 3 dB below = 8.9 mm
Ratio of SAR at M2 to SAR at M1 = 47%
Maximum value of SAR (measured) = 24.8 W/kg

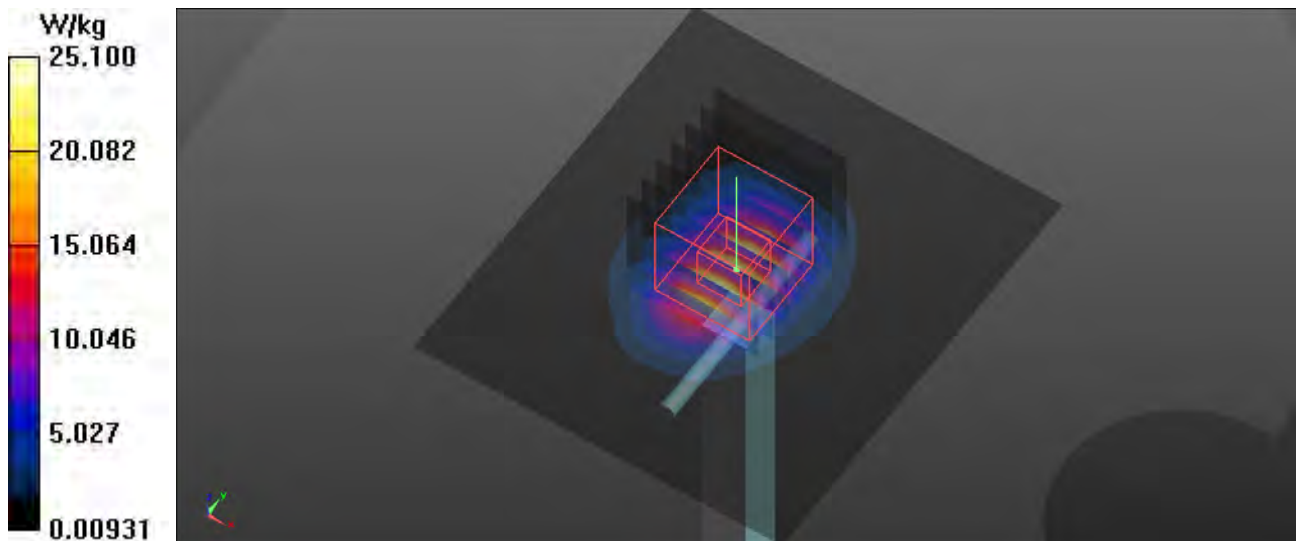

System Check-D2600V2_H2600**DUT: Dipole 2600 MHz D2600V2 SN:1082**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1


Medium: H2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 38.319$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2600 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 24.8 W/kg

Pin=250 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 115.7 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 30.5 W/kg
SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.61 W/kg
Smallest distance from peaks to all points 3 dB below = 9 mm
Ratio of SAR at M2 to SAR at M1 = 48.5%
Maximum value of SAR (measured) = 24.7 W/kg

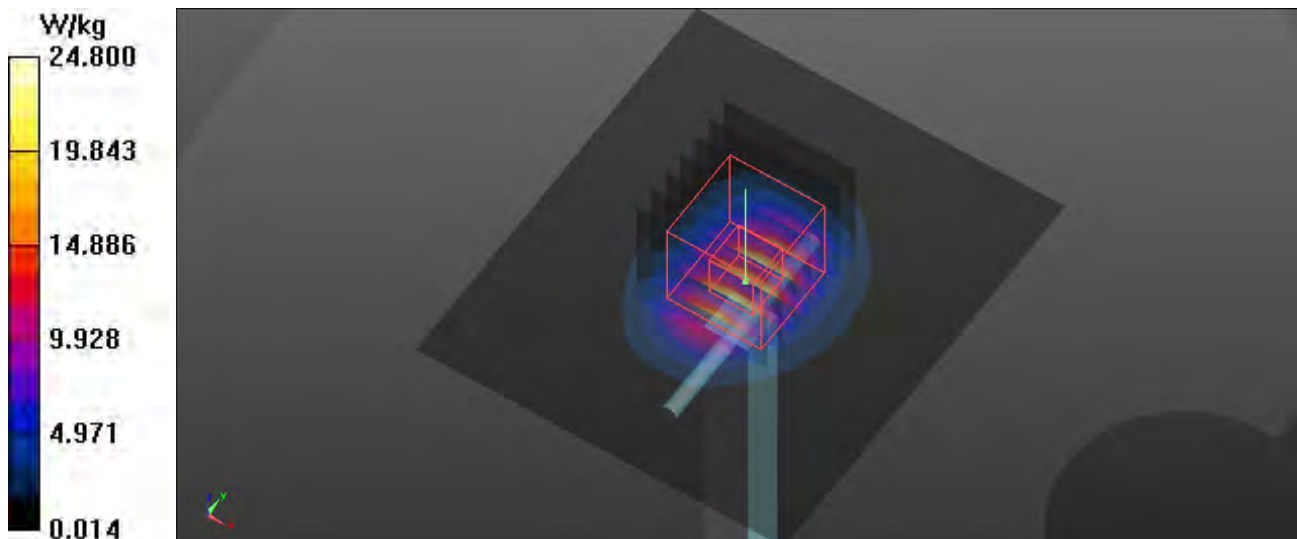

System Check-D2600V2_H2600**DUT: Dipole 2600 MHz D2600V2 SN:1082**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1


Medium: H2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.9, 7.43, 6.85) @ 2600 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=250 mW/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 24.0 W/kg

Pin=250 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 113.7 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 29.4 W/kg
SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.07 W/kg
Smallest distance from peaks to all points 3 dB below = 9 mm
Ratio of SAR at M2 to SAR at M1 = 46.4%
Maximum value of SAR (measured) = 23.3 W/kg

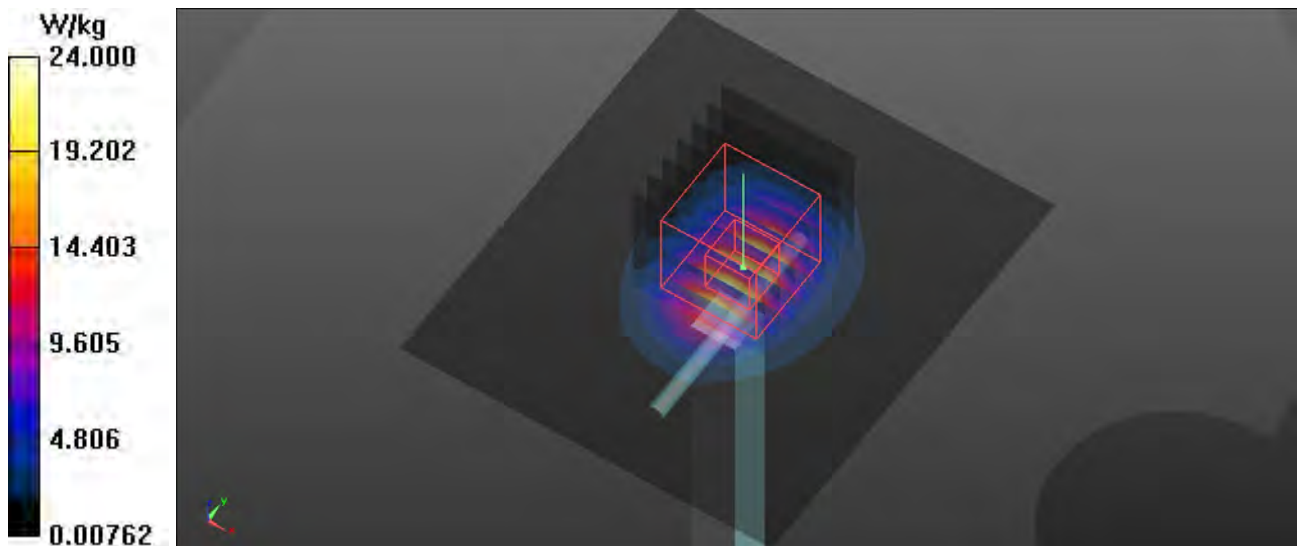

System Check-D3500V2_H3500

DUT: Dipole D3500V2 SN:1063

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: H3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.826$ S/m; $\epsilon_r = 38.461$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.22, 6.7, 6.18) @ 3500 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=100 mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 11.8 W/kg

Pin=100 mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.34 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 6.43 W/kg; SAR(10 g) = 2.53 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 11.4 W/kg

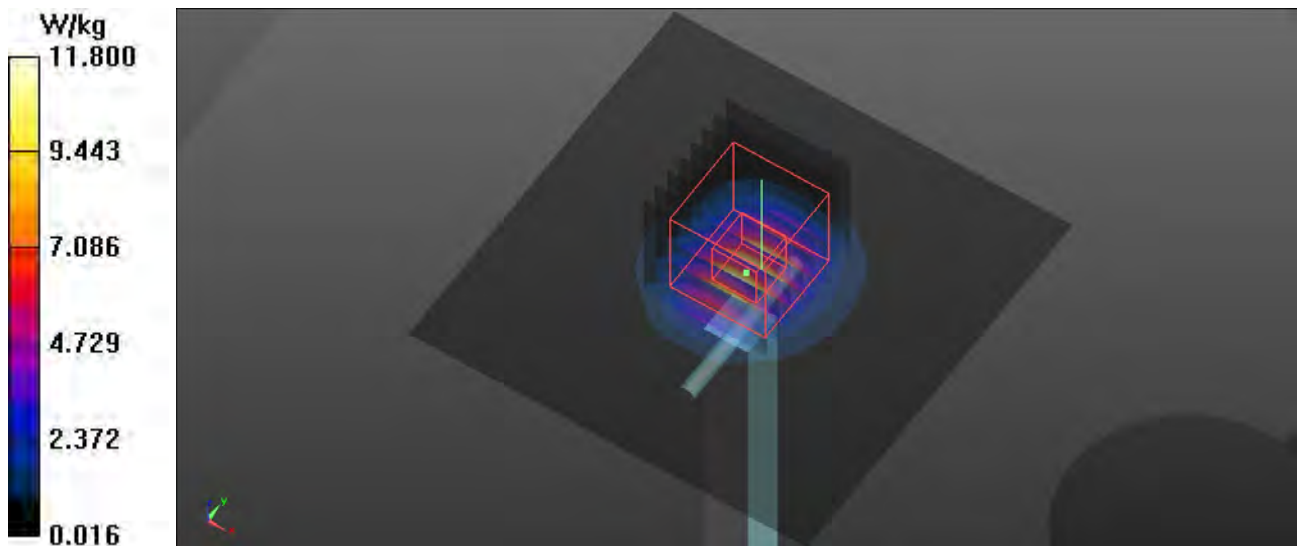

System Check-D3500V2_H3500**DUT: Dipole D3500V2 SN:1063**

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: H3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.917$ S/m; $\epsilon_r = 37.93$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.22, 6.7, 6.18) @ 3500 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=100 mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 11.8 W/kg

Pin=100 mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.61 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 6.31 W/kg; SAR(10 g) = 2.49 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 11.3 W/kg

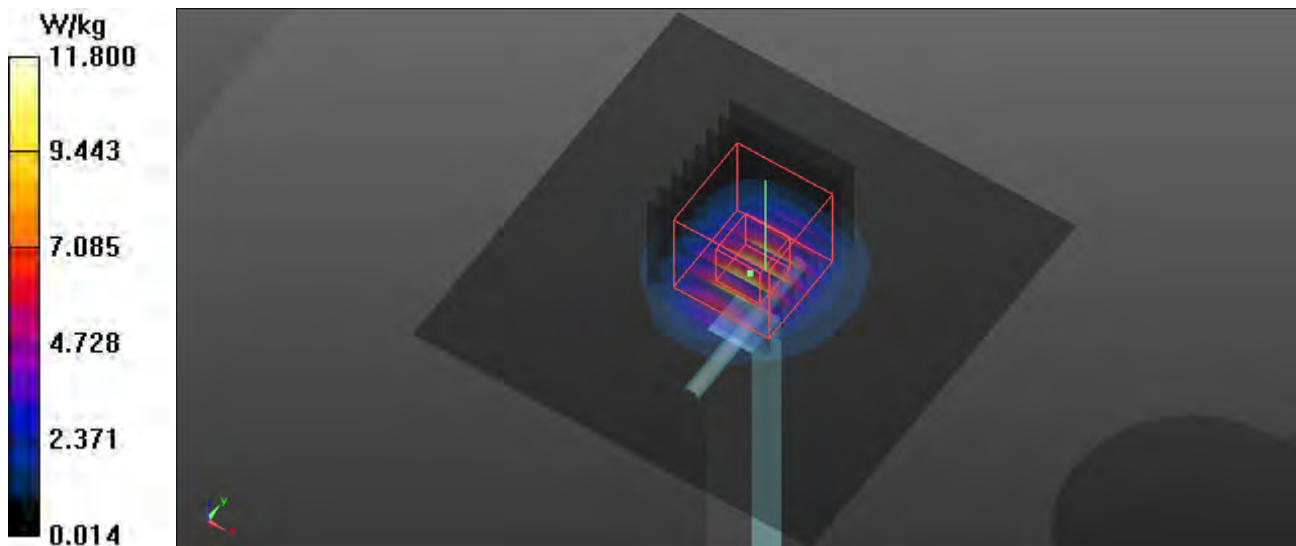

System Check-D3700V2_H3700**DUT: Dipole 3700 MHz D3700V2 SN:1020**

Communication System: UID 0, CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: H3700 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.123$ S/m; $\epsilon_r = 38.864$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3700 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=100 mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 12.4 W/kg

Pin=100 mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.85 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 6.51 W/kg; SAR(10 g) = 2.5 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 11.8 W/kg

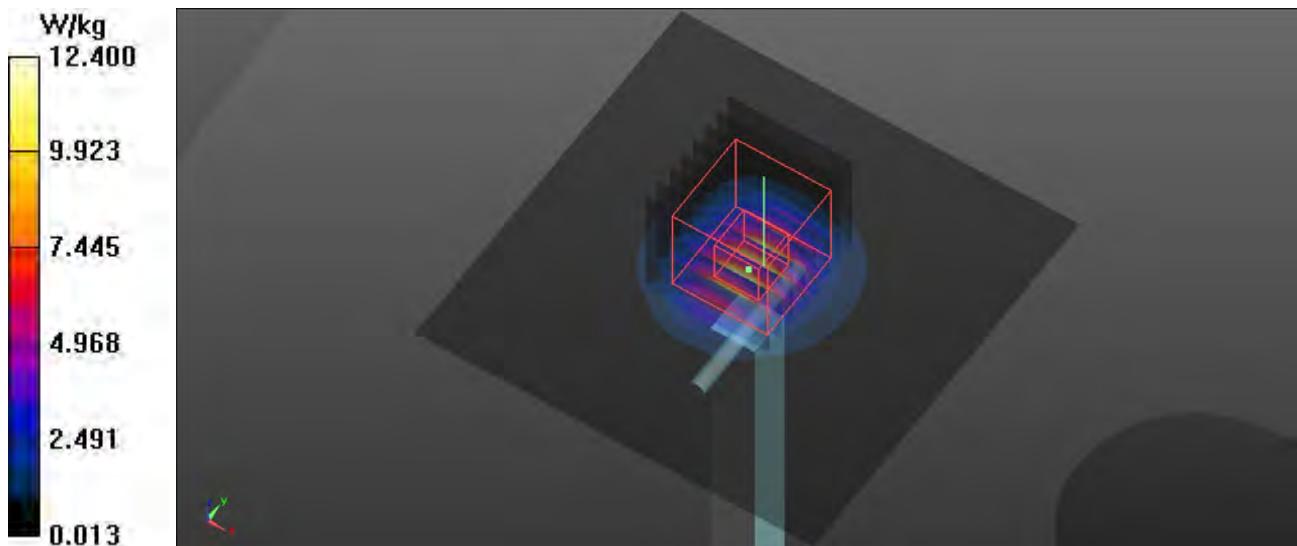

System Check-D5GHz_H5250

DUT: Dipole D5GHzV2 SN:1115

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5250$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 37.438$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5250 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.0 W/kg

Pin=100mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.69 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 18.4 W/kg

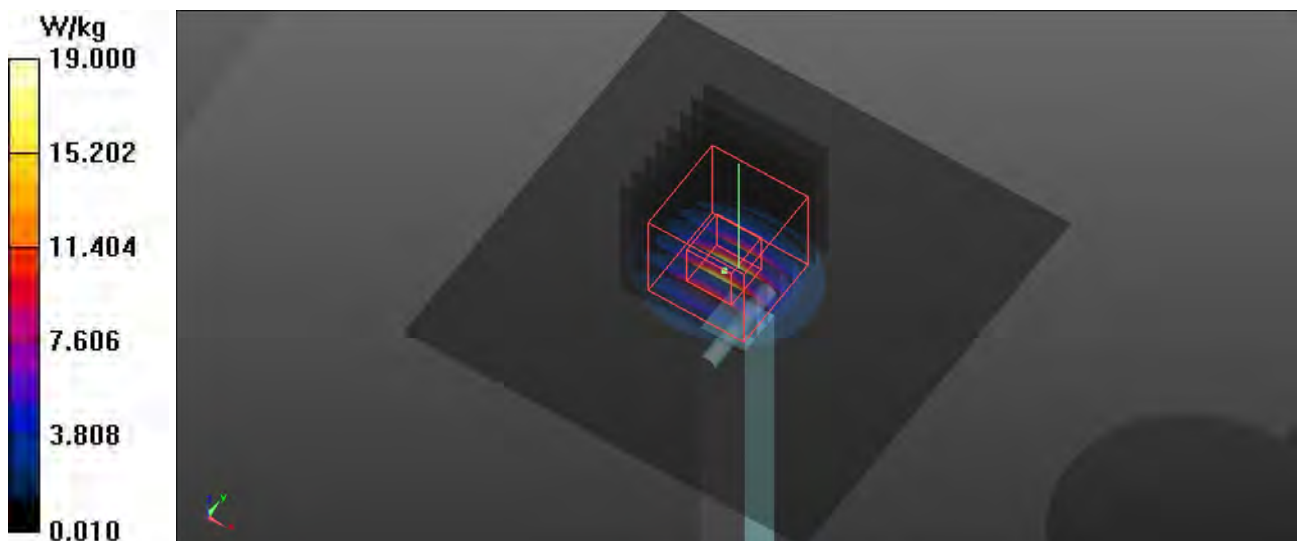

System Check-D5GHz_H5600

DUT: Dipole D5GHzV2 SN:1115

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5600$ MHz; $\sigma = 4.938$ S/m; $\epsilon_r = 36.734$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.76, 5.13, 4.73) @ 5600 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.8 W/kg

Pin=100mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.54 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 36.8 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.23 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 18.8 W/kg

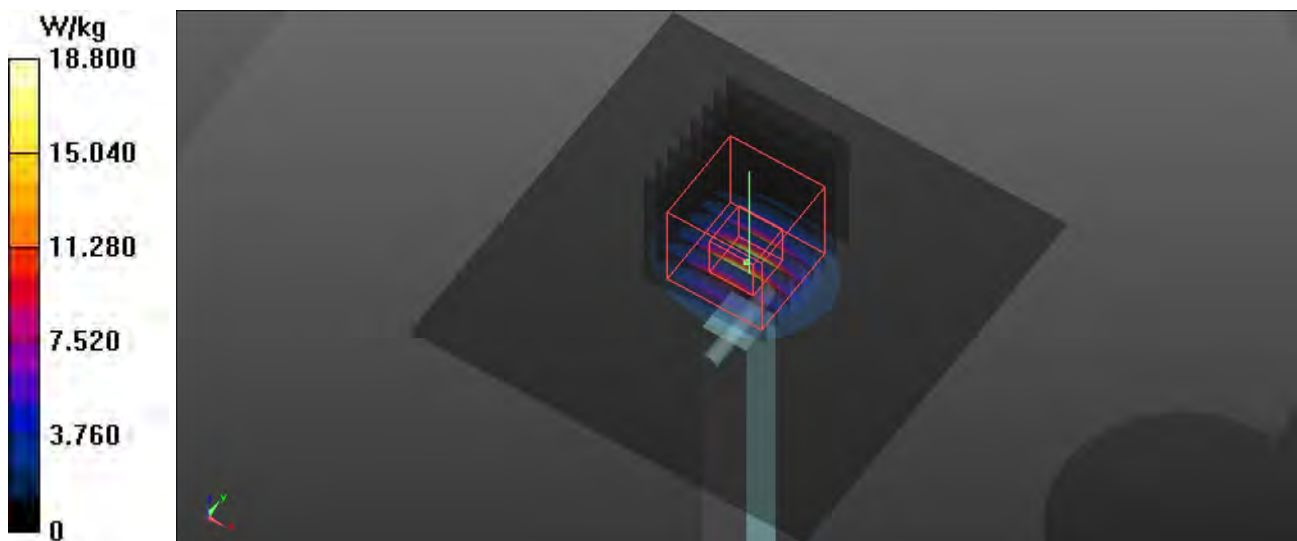

System Check-D5GHz_H5800

DUT: Dipole D5GHzV2 SN:1115

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5800$ MHz; $\sigma = 5.145$ S/m; $\epsilon_r = 36.469$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.66, 5.02, 4.63) @ 5800 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.7 W/kg

Pin=100mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.05 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 39.7 W/kg

SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.3 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 19.8 W/kg

