

**P22-1 ENDC-n41_30kHz_DFT-s-OFDM_QPSK100M_Left
Cheek_Ch518598_Innter-full_Mid****DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.893$ S/m; $\epsilon_r = 39.686$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.9, 7.43, 6.85) @ 2592.99 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.434 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.061 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.4%

Maximum value of SAR (measured) = 0.406 W/kg

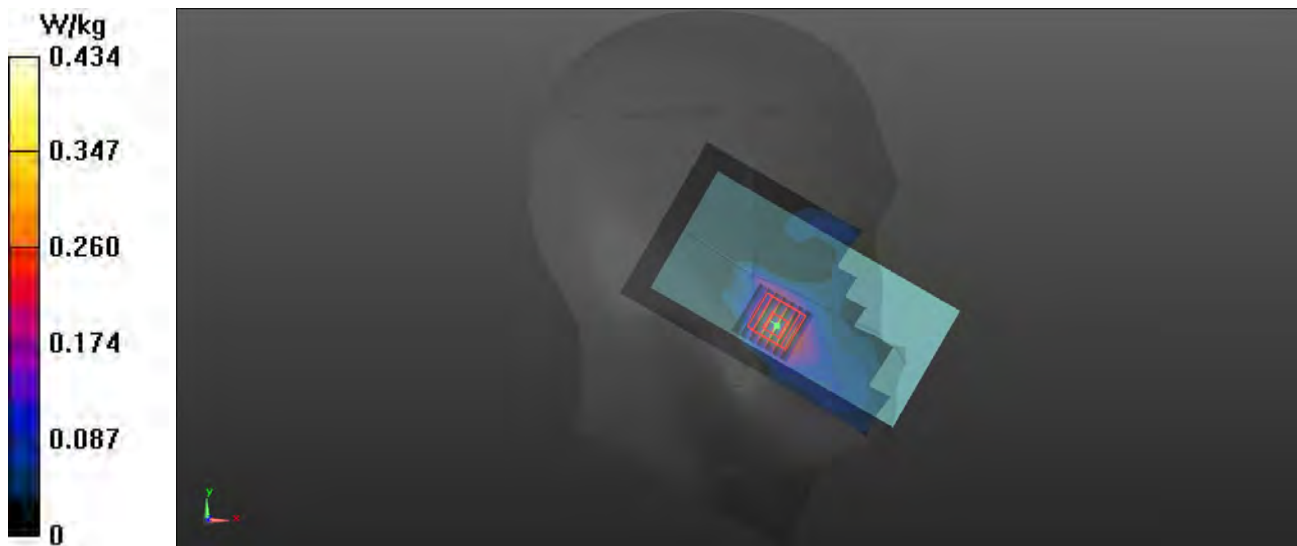

P23 n48_30kHz_DFT-s-OFDM_QPSK40M_Right Cheek_Ch638000_Innter-full_Mid**DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3570 MHz; Duty Cycle: 1:1

Medium: H3500 Medium parameters used: $f = 3570$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 38.924$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.22, 6.7, 6.18) @ 3570 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.296 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.908 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.7%

Maximum value of SAR (measured) = 0.299 W/kg

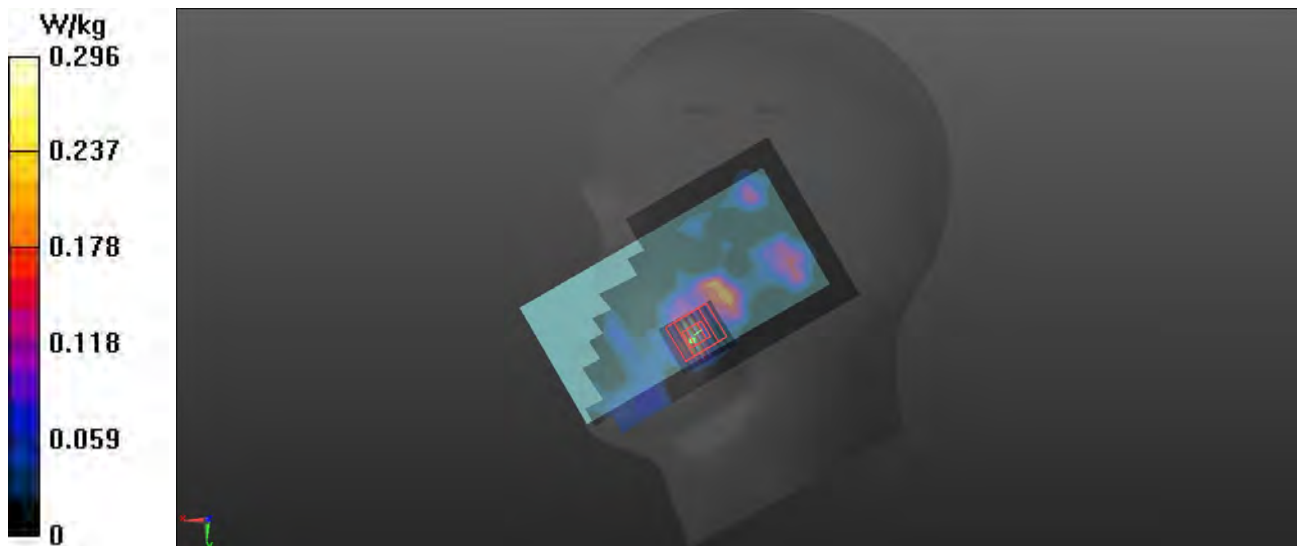

P24 n66_15kHz_DFT-s-OFDM_QPSK20M_Left Cheek_Ch354000_Innter-full_Mid**DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.719$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.58, 8.16, 7.53) @ 1770 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.393 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.075 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 69%

Maximum value of SAR (measured) = 0.381 W/kg

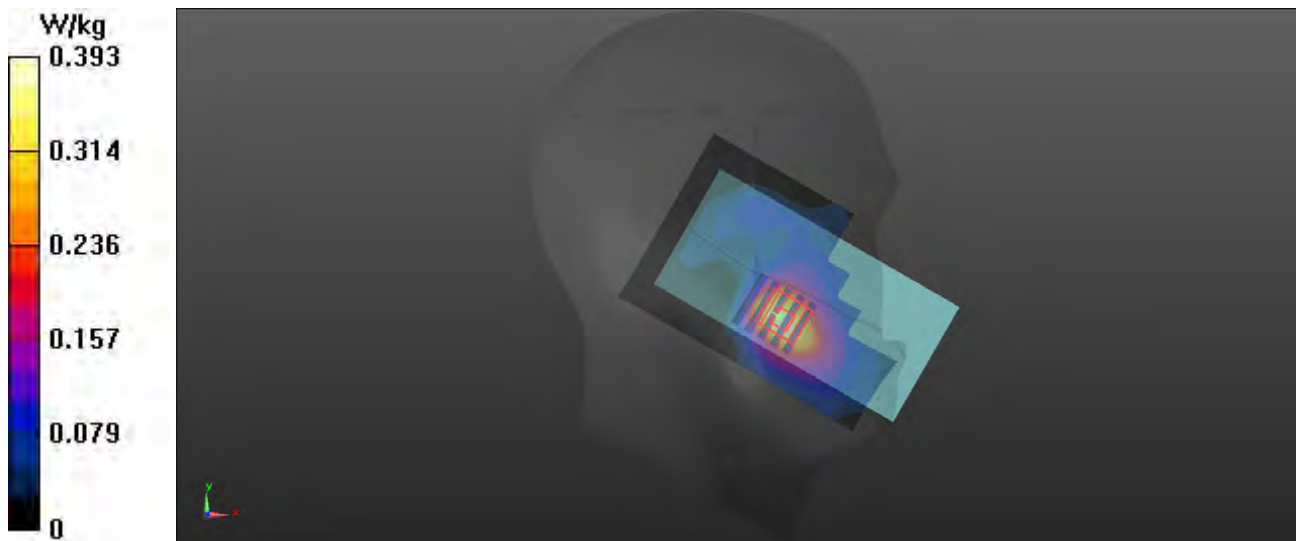

P25 n71_15kHz_DFT-s-OFDM_QPSK20M_Left Cheek_Ch134600_Innter-full_Mid**DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 673 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 673$ MHz; $\sigma = 0.84$ S/m; $\epsilon_r = 40.82$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 673 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0806 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.209 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 87%

Maximum value of SAR (measured) = 0.0790 W/kg

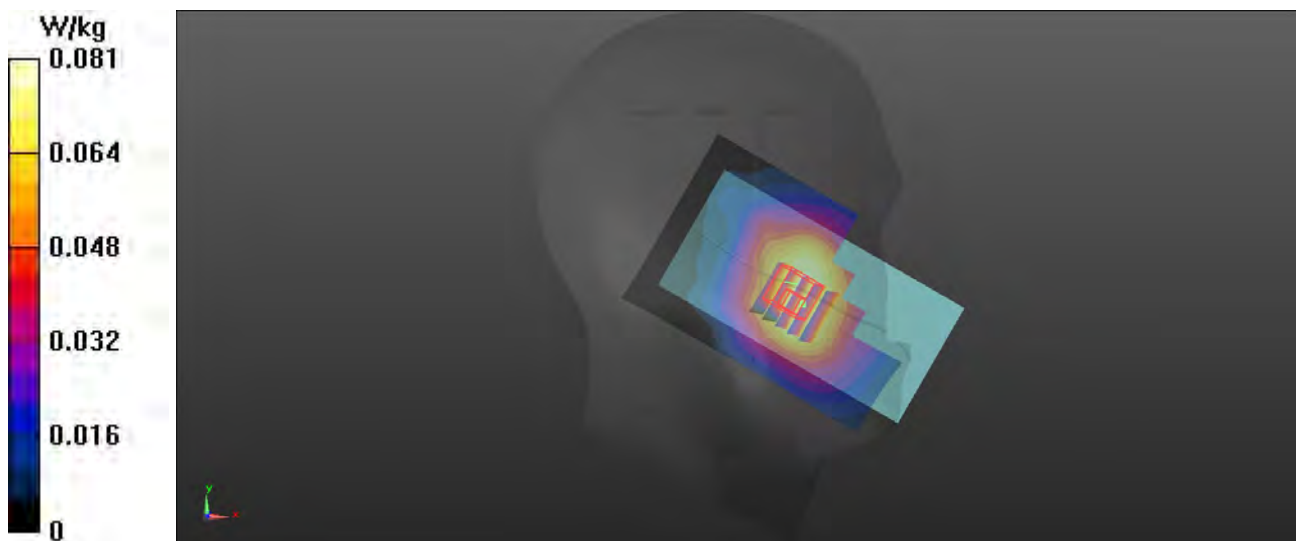

P26 n77-A_30kHz_DFT-s-OFDM_QPSK100M_Right Cheek_Ch633334_Innter-full_Mid**DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium: H3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.917$ S/m; $\epsilon_r = 37.93$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.22, 6.7, 6.18) @ 3500.01 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.338 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.915 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 80%

Maximum value of SAR (measured) = 0.290 W/kg

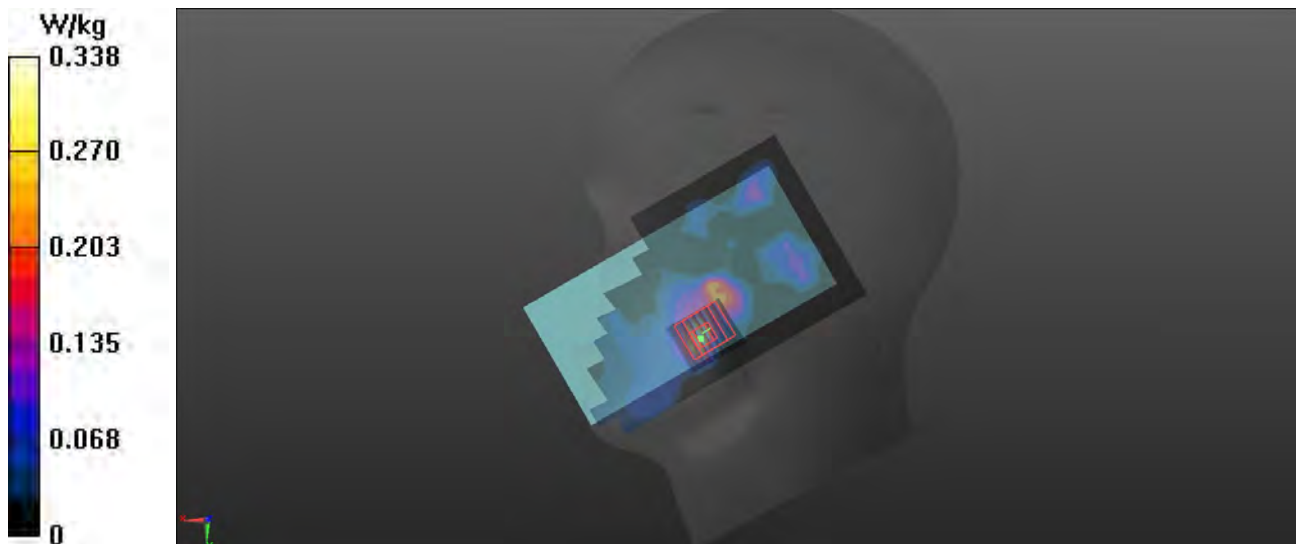

**P26-1 ENDC-n77-A_30kHz_DFT-s-OFDM_QPSK100M_Right
Cheek_Ch633334_Innter-full_Mid****DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium: H3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.917$ S/m; $\epsilon_r = 37.93$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.22, 6.7, 6.18) @ 3500.01 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.144 W/kg**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.396 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 76%

Maximum value of SAR (measured) = 0.104 W/kg

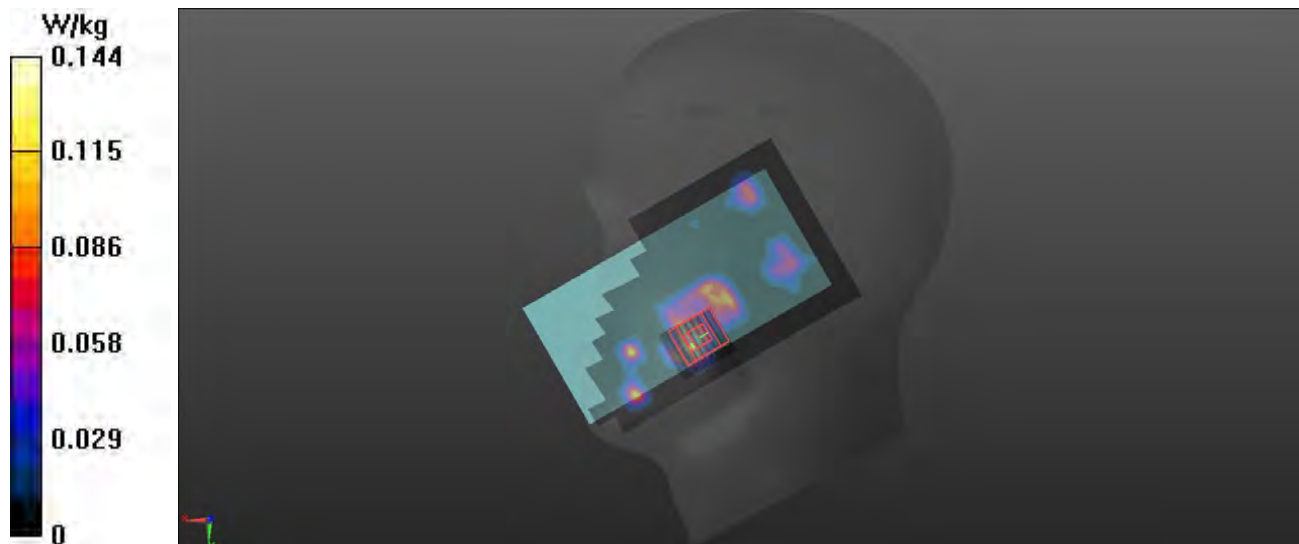

P27 n77-C_30kHz_DFT-s-OFDM_QPSK100M_Right Cheek_Ch650000_Innter-full_Mid**DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: H3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.051$ S/m; $\epsilon_r = 38.029$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3750 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.522 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 5.627 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.646 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.4%

Maximum value of SAR (measured) = 0.497 W/kg

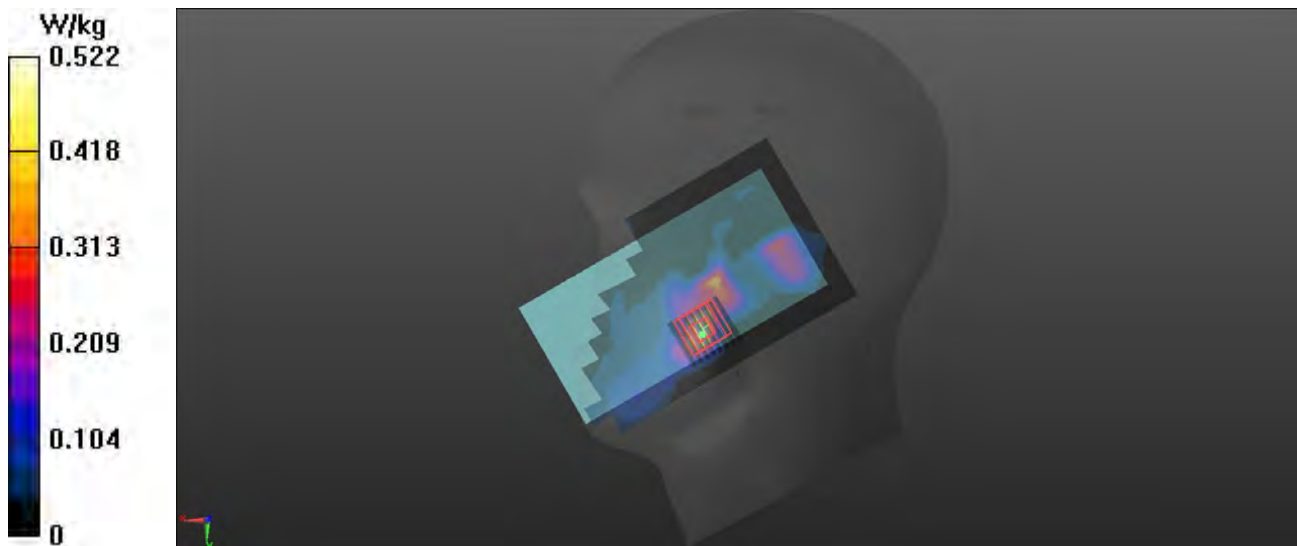

**P27-1 ENDC-n77-C_30kHz_DFT-s-OFDM_QPSK100M_Right
Cheek_Ch650000_Innter-full_Mid****DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: H3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.051$ S/m; $\epsilon_r = 38.029$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3750 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.348 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.002 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.9%

Maximum value of SAR (measured) = 0.226 W/kg

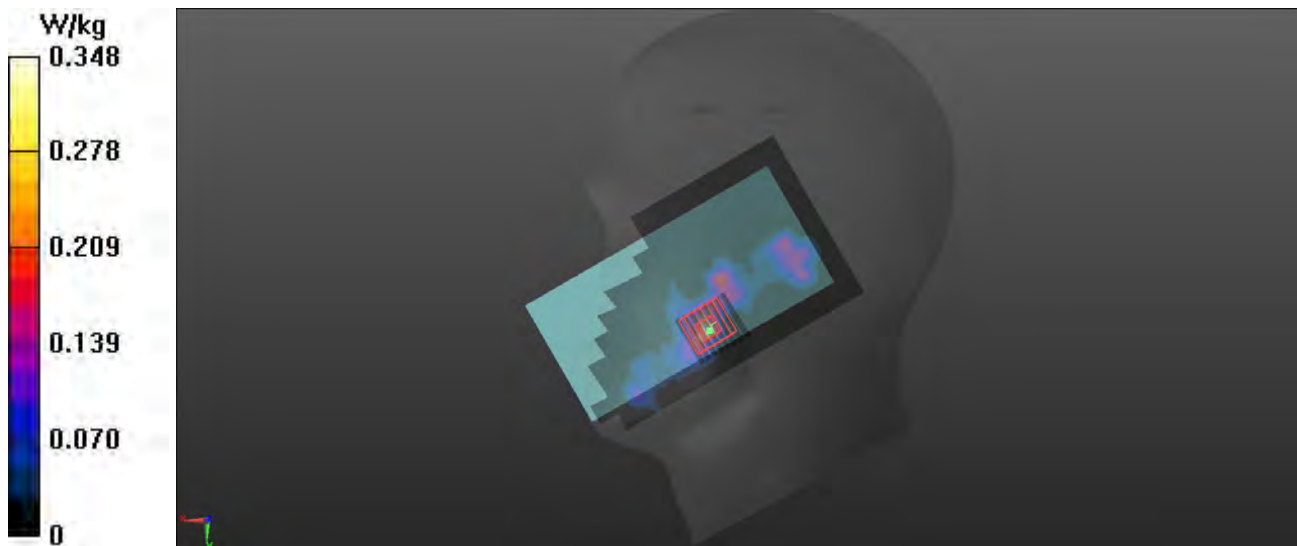

P28 802.11b_Left Cheek_Ch11_Ant 2**DUT: EUT**

Communication System: UID 0, 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H900 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.857$ S/m; $\epsilon_r = 39.361$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2462 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.804 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 1.14 W/kg

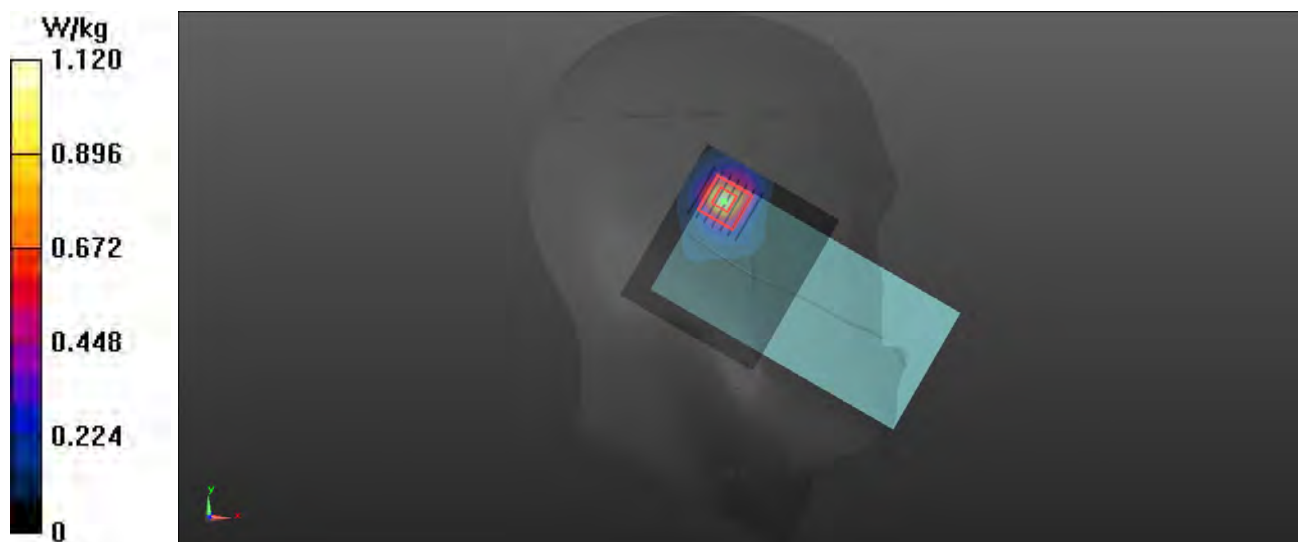

P29 802.11a_Right Cheek_Ch48_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5240$ MHz; $\sigma = 4.554$ S/m; $\epsilon_r = 37.462$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5240 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.825 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.522 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 0.692 W/kg

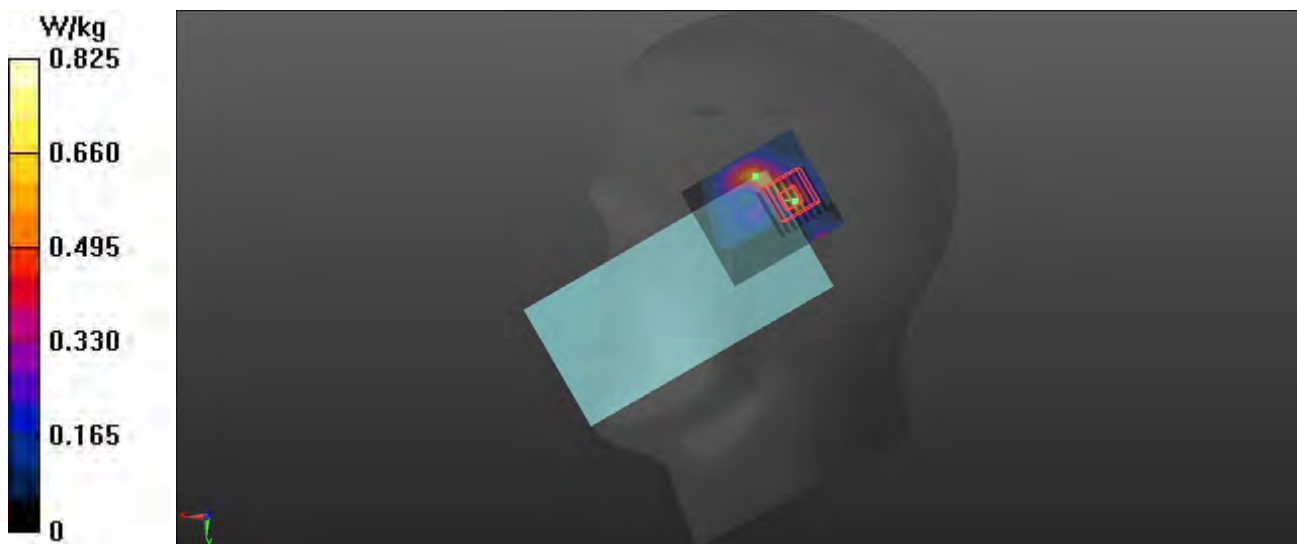

P30 802.11a_Right Cheek_Ch64_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5320$ MHz; $\sigma = 4.632$ S/m; $\epsilon_r = 37.322$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5320 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.539 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.985 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 0.448 W/kg

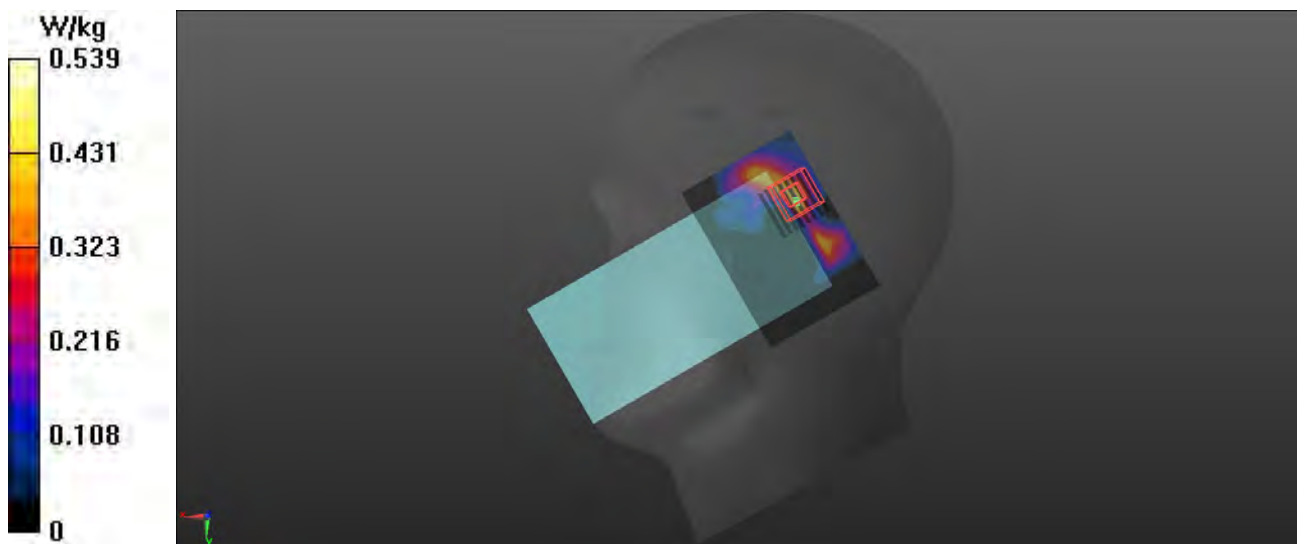

P31 802.11a_Right Tilted_Ch100_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5500$ MHz; $\sigma = 4.825$ S/m; $\epsilon_r = 36.98$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.76, 5.13, 4.73) @ 5500 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.429 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.368 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.267 W/kg

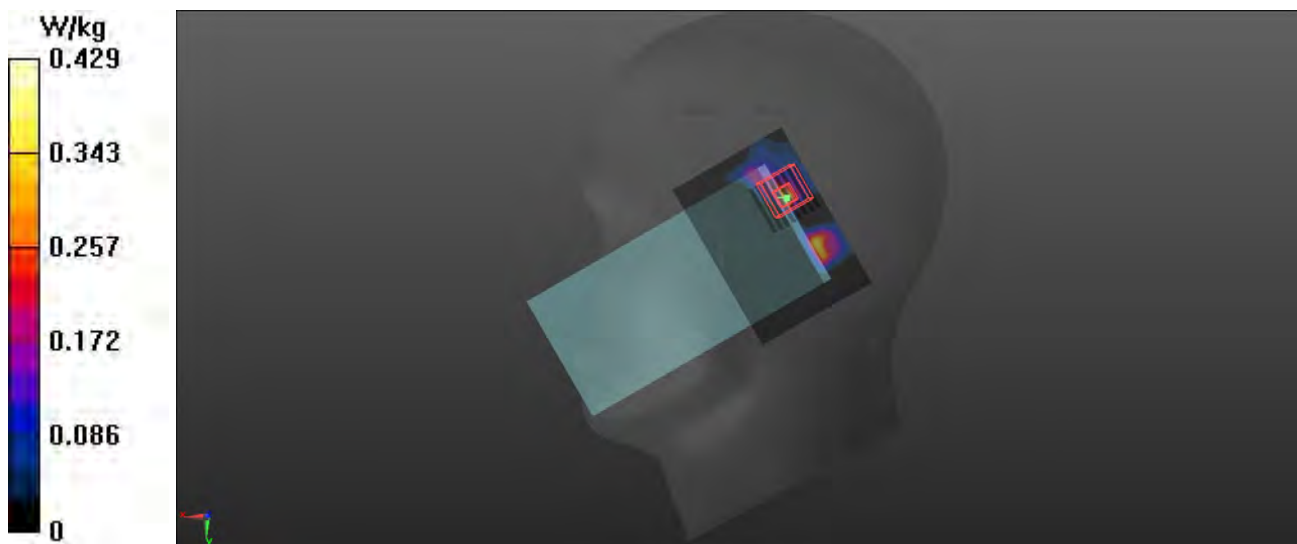

P32 802.11a_Left Tilted_Ch157_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5785$ MHz; $\sigma = 5.129$ S/m; $\epsilon_r = 36.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.66, 5.02, 4.63) @ 5785 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (51x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.615 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.526 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 0.503 W/kg



P33 BT_DH5_Right Cheek_Ch78_Ant 1**DUT: EUT**

Communication System: UID 0, BT; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 39.282$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2480 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0571 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.00577 W/kg; SAR(10 g) = 0.00299 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 26.8%

Maximum value of SAR (measured) = 0.0151 W/kg

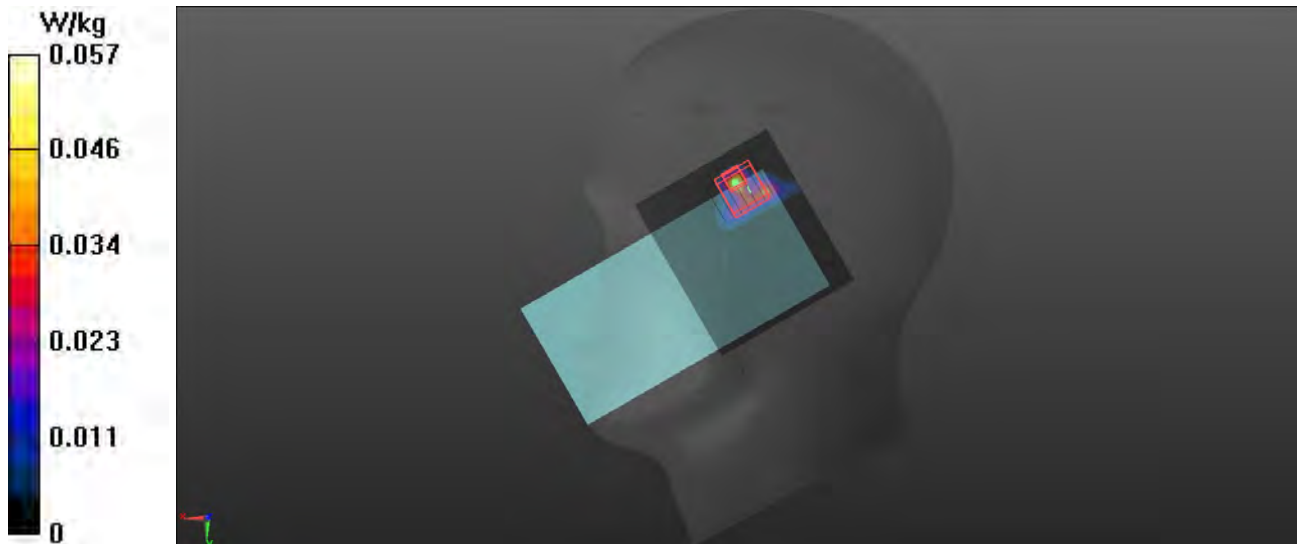

P33-1 2nd_BLE_1M_Left Cheek_Ch0=**DUT: EUT**

Communication System: UID 0, 2.4G (0); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2402 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (91x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.00348 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.6730 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.00278 W/kg

SAR(1 g) = 0.00235 W/kg; SAR(10 g) = 0.0019 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 81.8%

Maximum value of SAR (measured) = 0.00278 W/kg

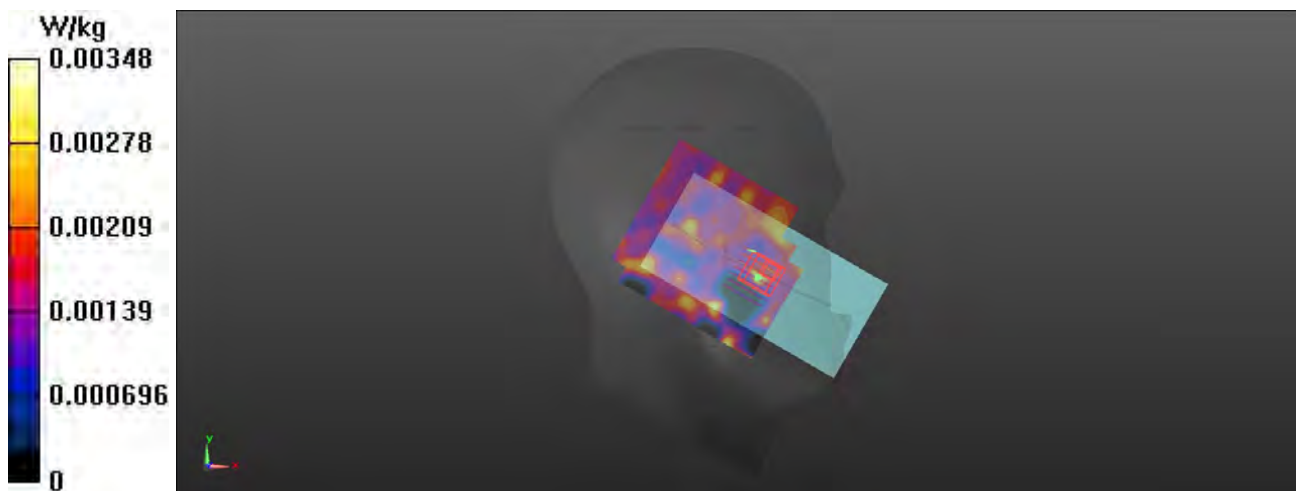

P34 GSM850_GPRS12_Rear Face_1cm_Ch128**DUT: EUT**

Communication System: UID 0, GPRS12; Frequency: 824.2 MHz; Duty Cycle: 1:2

Medium: H835 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 40.909$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 824.2 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.215 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.52 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.100 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 0.170 W/kg

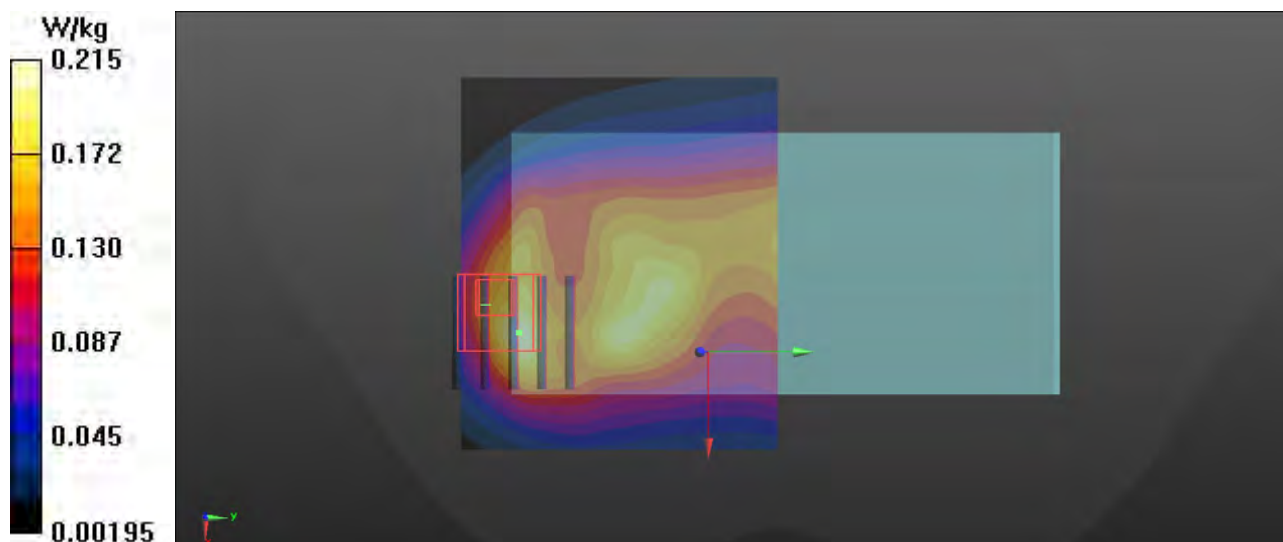

P35 GSM1900_GPRS11_Rear Face_1cm_Ch512**DUT: EUT**

Communication System: UID 0, GPRS11; Frequency: 1850.2 MHz; Duty Cycle: 1:2.67

Medium: H1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 39.838$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1850.2 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.394 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.357 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.136 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.371 W/kg

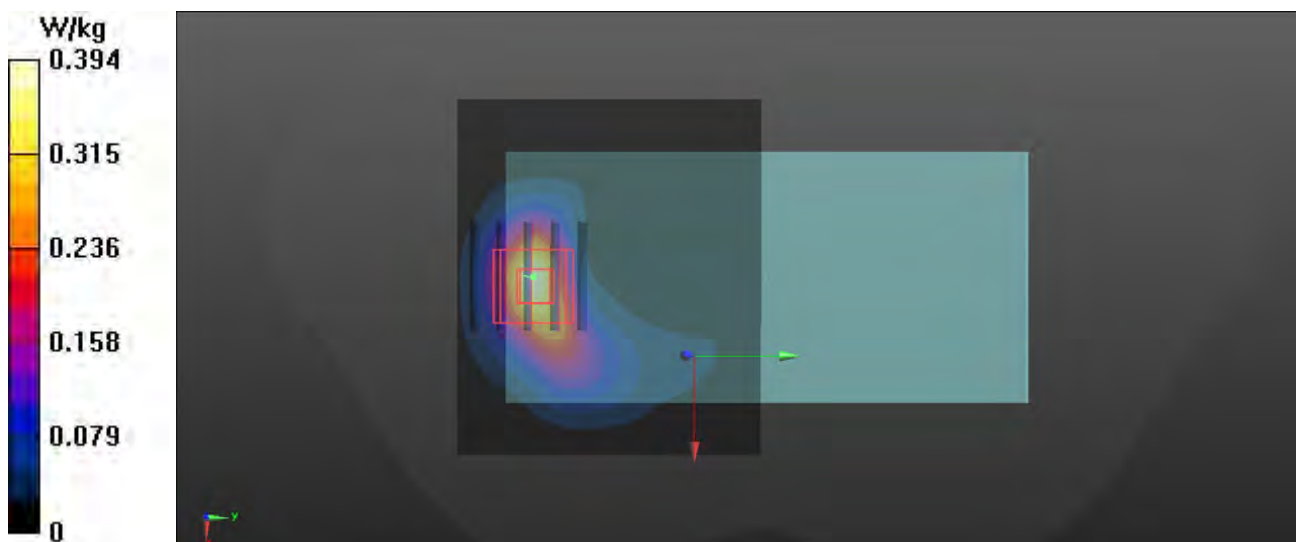

P36 WCDMA II_RMC12.2k_Rear Face_1cm_Ch9538**DUT: EUT**

Communication System: UID 0, WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.407$ S/m; $\epsilon_r = 39.754$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1907.6 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.569 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.42 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 0.580 W/kg

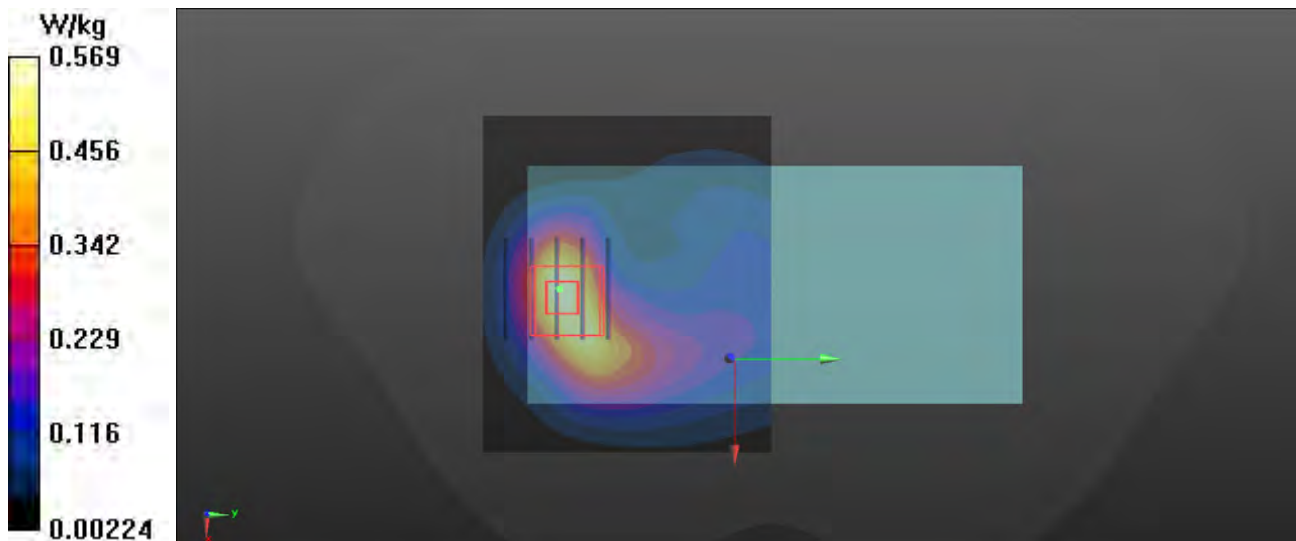

P37 WCDMA IV_RMC12.2k_Rear Face_1cm_Ch1513**DUT: EUT**

Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.328$ S/m; $\epsilon_r = 40.069$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1752.6 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.424 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.640 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 0.397 W/kg

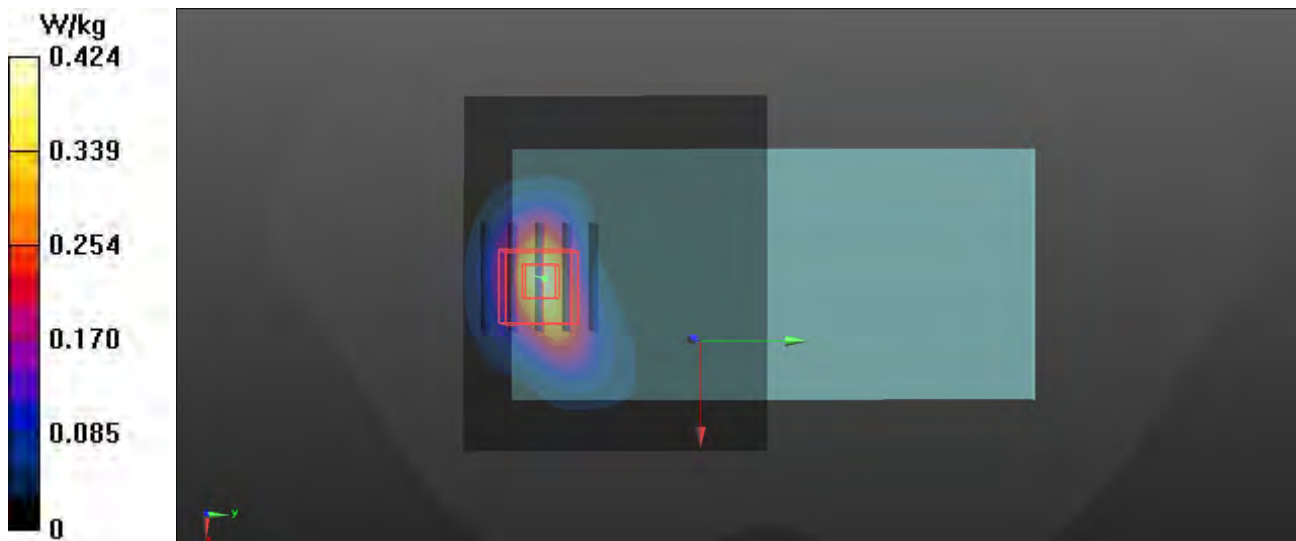

P38 WCDMA V_RMC12.2k_Rear Face_1cm_Ch4132**DUT: EUT**

Communication System: UID 0, WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 40.903$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 826.4 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.282 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.84 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

Maximum value of SAR (measured) = 0.313 W/kg

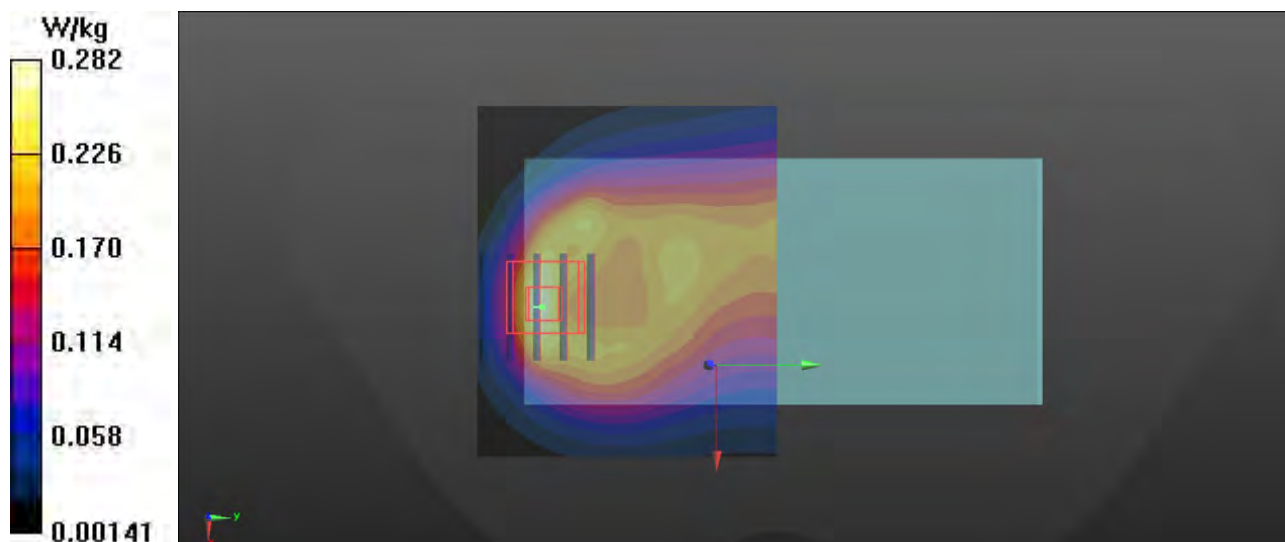

P39 LTE 7_QPSK20M_Rear Face_1cm_Ch21350_1RB_OS0**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 39.075$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2560 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.337 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 1.10 W/kg

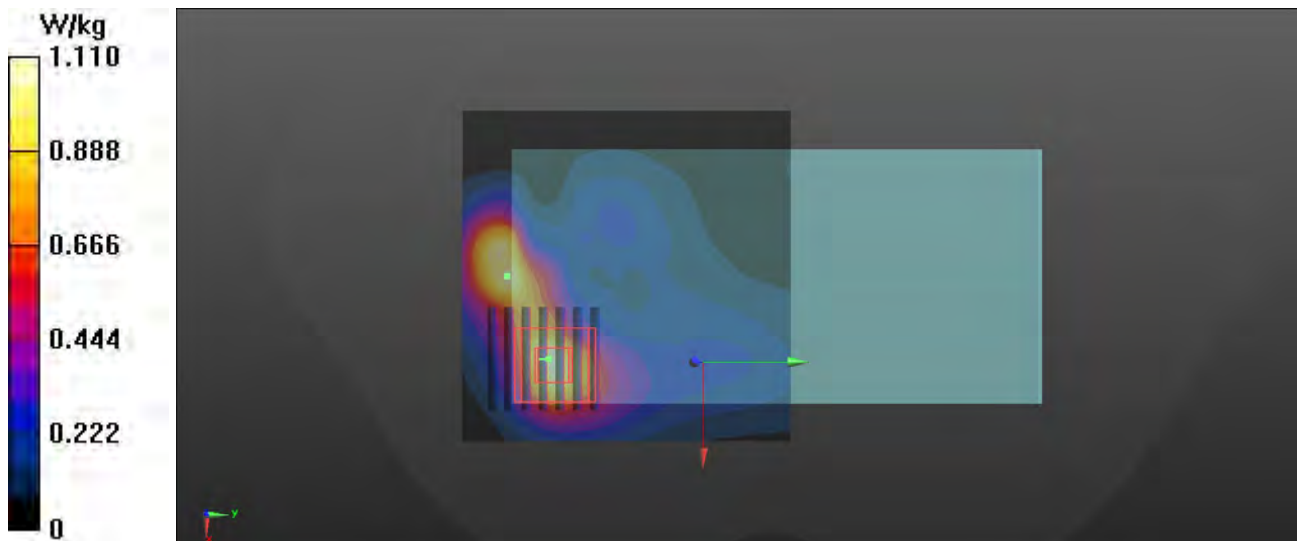

P39-1 ENDC_LTE 7_QPSK20M_Rear Face_1cm_Ch21350_1RB_OS0**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 39.705$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.9, 7.43, 6.85) @ 2560 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.522 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.288 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.580 W/kg

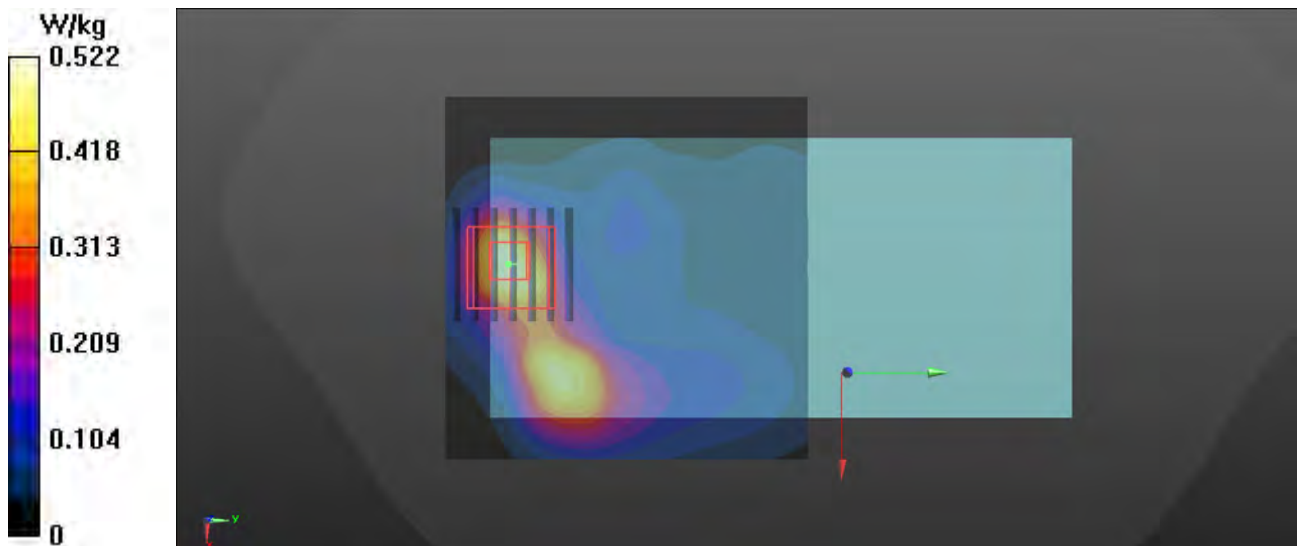

P40 LTE 12_QPSK10M_Rear Face_1cm_Ch23095_1RB_OS49**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 41.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 707.5 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.288 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.78 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80%

Maximum value of SAR (measured) = 0.280 W/kg

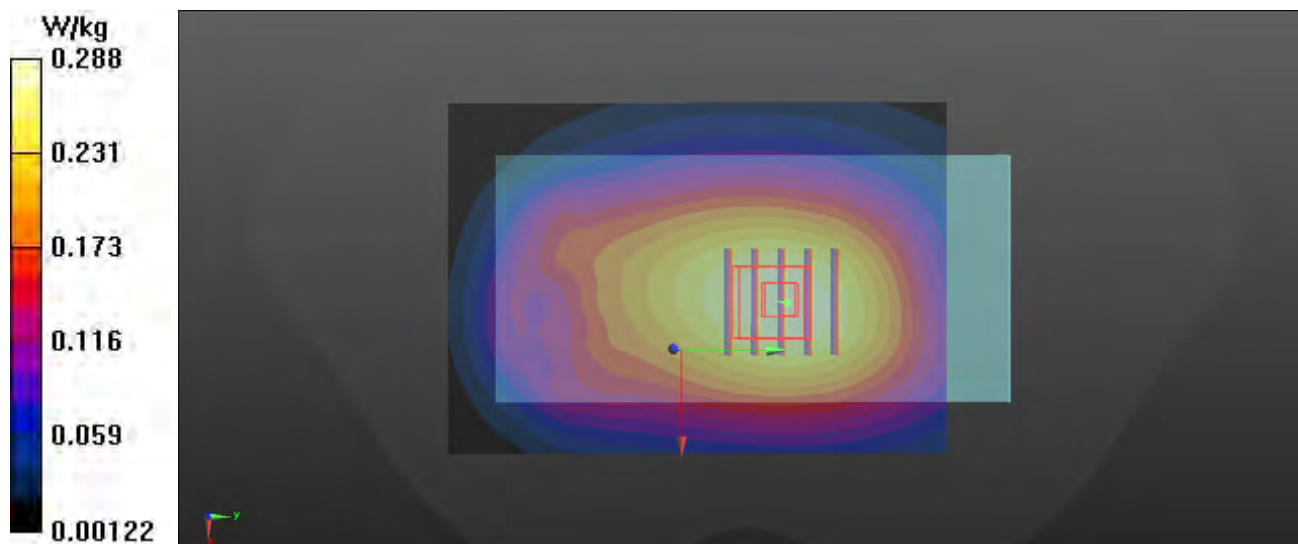

P41 LTE 13_QPSK10M_Rear Face_1cm_Ch23230_1RB_OS0**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 40.997$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 782 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.283 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.61 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.226 W/kg ; SAR(10 g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 0.270 W/kg

