

P60 n77-C_30kHz_DFT-s-OFDM_QPSK100M_Rear Face_1cm_Ch650000_Innter-full_Mid**DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: H3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.051$ S/m; $\epsilon_r = 38.029$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3750 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.133 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 1.24 W/kg

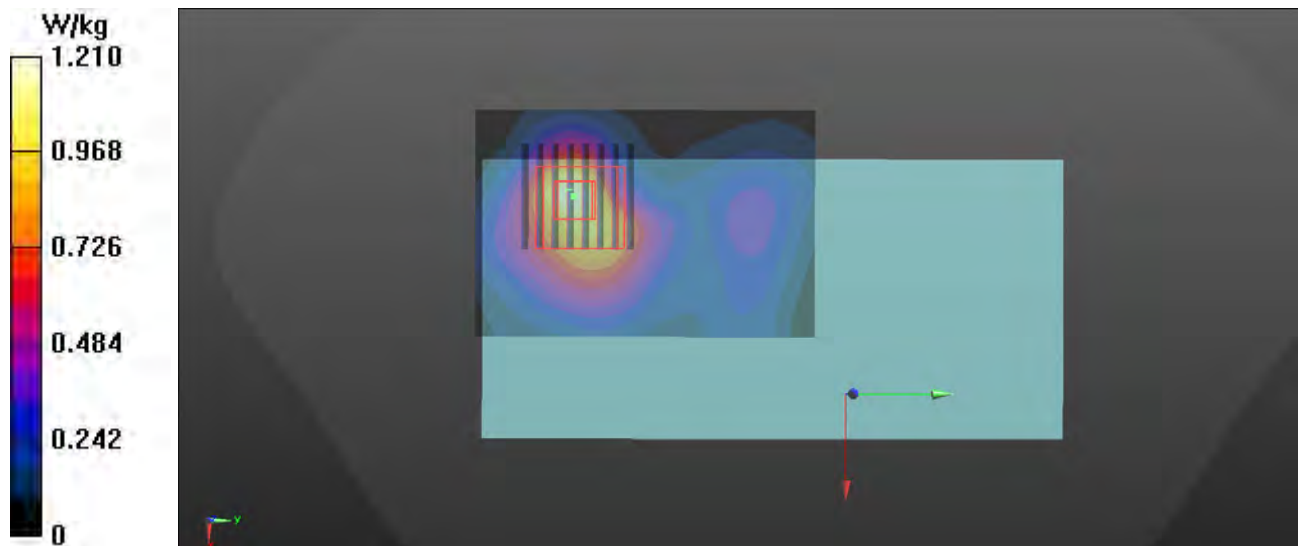

**P60-1 n77-C_30kHz_DFT-s-OFDM_QPSK100M_Right
Side_1cm_Ch650000_Innter-full_Mid****DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: H3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.051$ S/m; $\epsilon_r = 38.029$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3750 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.38 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 16.12 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.4%

Maximum value of SAR (measured) = 1.33 W/kg

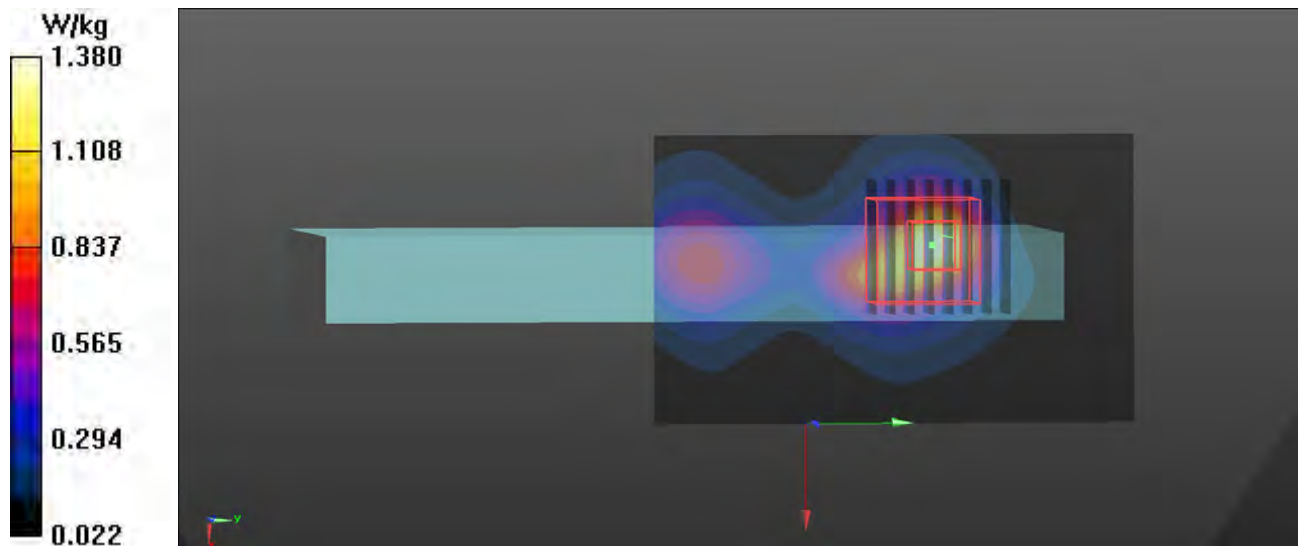

**P60-2 ENDC-n77-C_30kHz_DFT-s-OFDM_QPSK100M_Rear
Face_1cm_Ch650000_Innter-full_Mid****DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: H3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.051$ S/m; $\epsilon_r = 38.029$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3750 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.601 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 5.455 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.1%

Maximum value of SAR (measured) = 0.587 W/kg

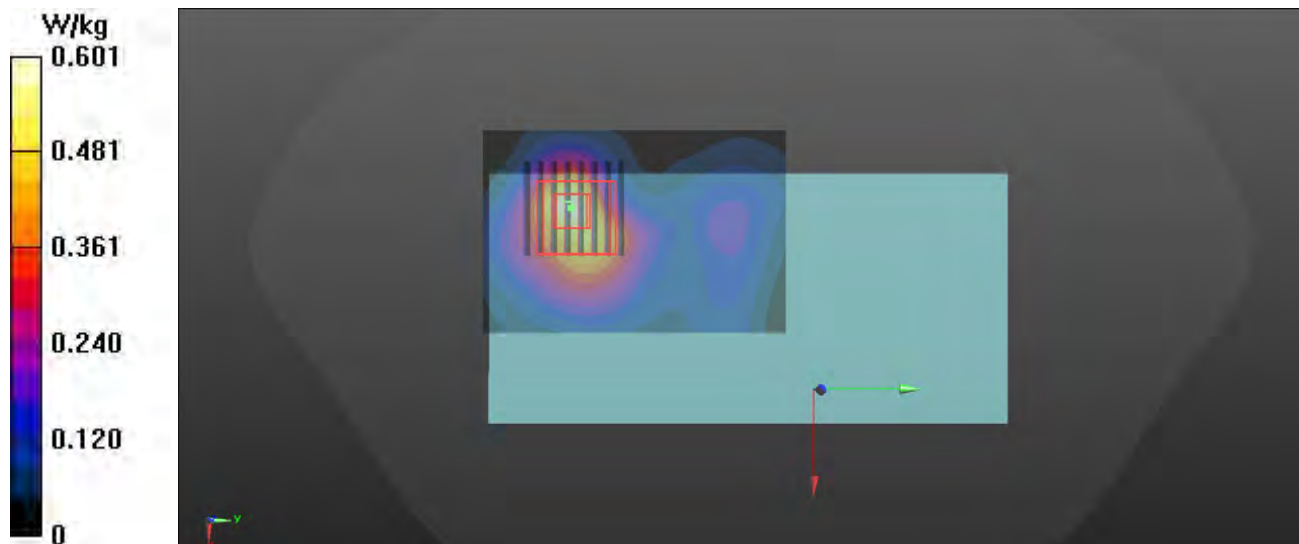

**P60-3 ENDC-n77-C_30kHz_DFT-s-OFDM_QPSK100M_Right
Side_1cm_Ch650000_Innter-full_Mid****DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: H3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.051$ S/m; $\epsilon_r = 38.029$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3750 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.744 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 11.49 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 73.5%

Maximum value of SAR (measured) = 0.664 W/kg

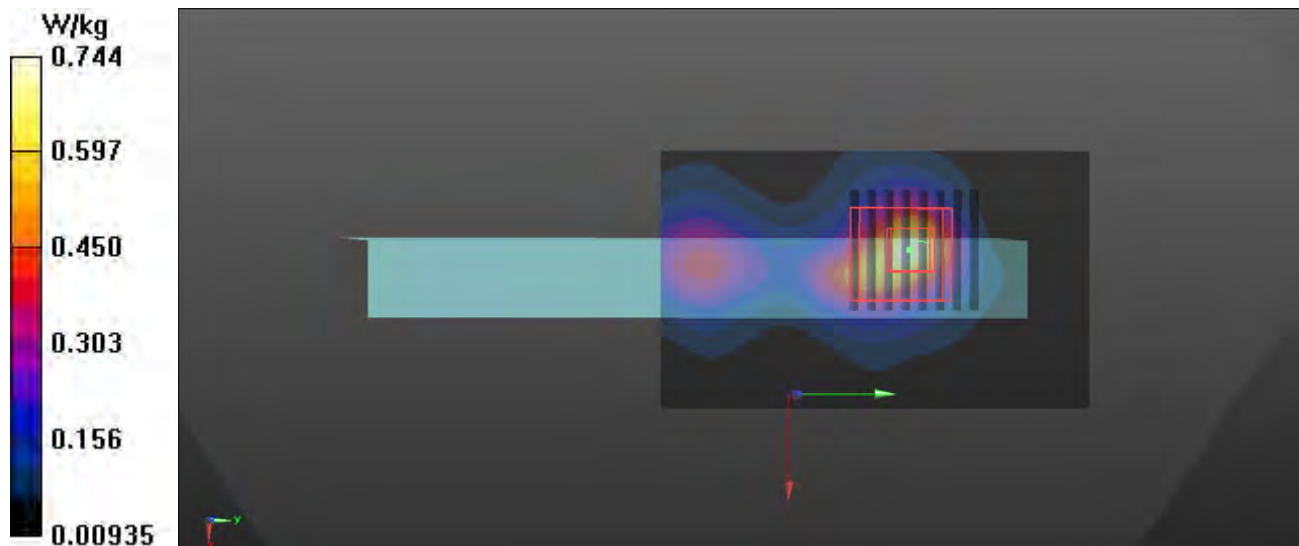

P61 802.11b_Rear Face_1cm_Ch11_Ant 2**DUT: EUT**

Communication System: UID 0, 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.857$ S/m; $\epsilon_r = 39.361$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2462 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.396 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.943 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 0.379 W/kg

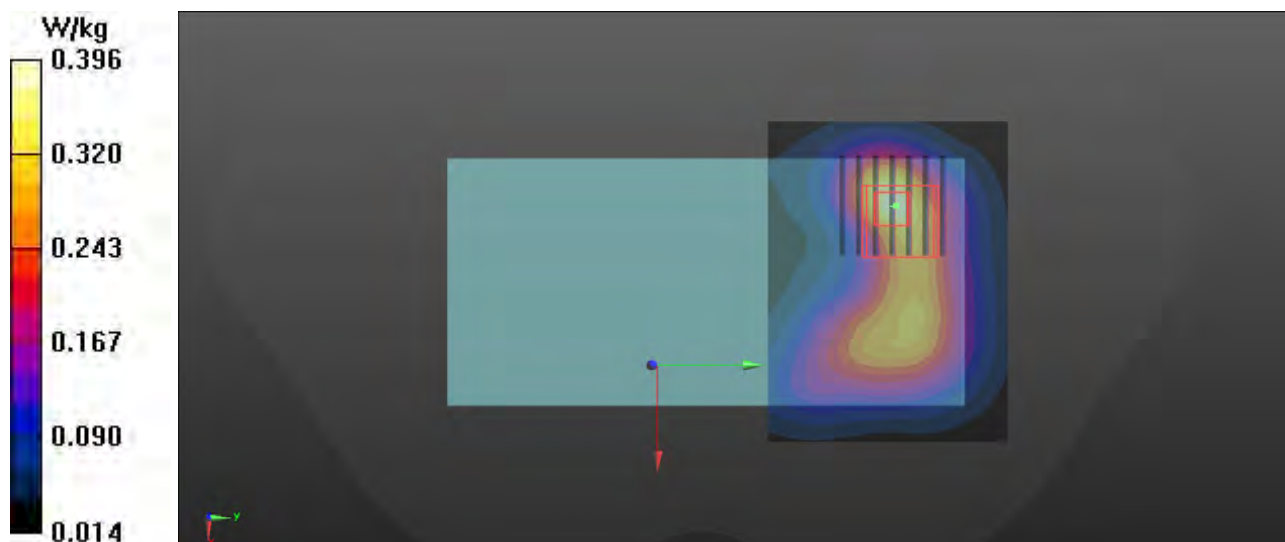

P61-1 802.11b_Top Side_1cm_Ch11_Ant 2**DUT: EUT**

Communication System: UID 0, 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.857$ S/m; $\epsilon_r = 39.361$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2462 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (51x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.386 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.02 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.376 W/kg

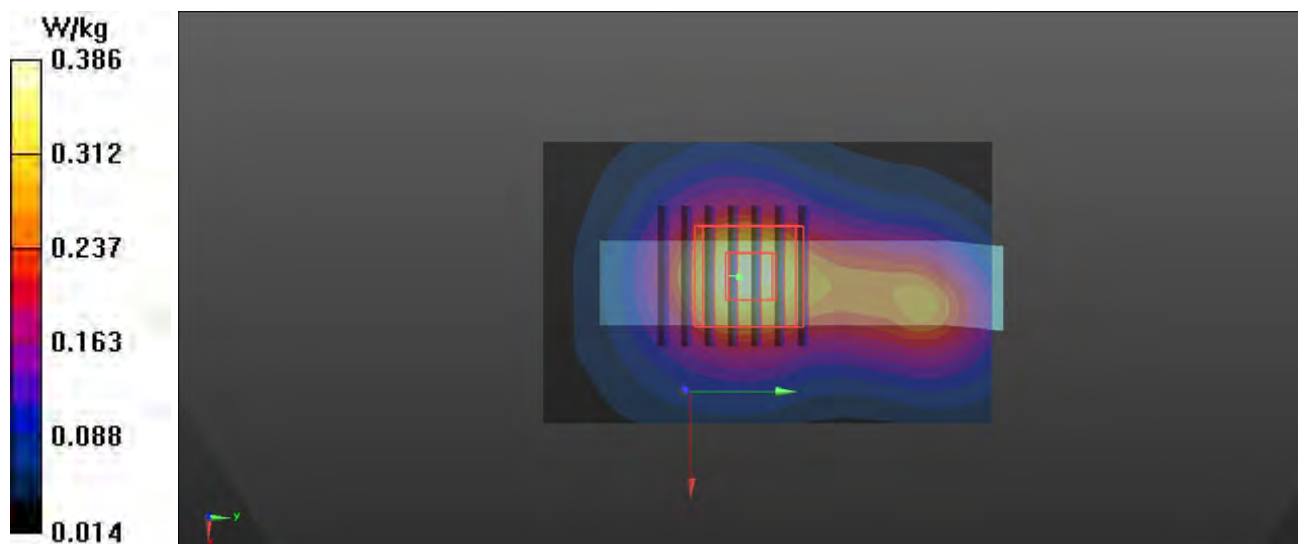

P62 802.11a_Rear Face_1cm_Ch48_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5240$ MHz; $\sigma = 4.554$ S/m; $\epsilon_r = 37.462$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5240 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.517 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.7850 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.4%

Maximum value of SAR (measured) = 0.516 W/kg

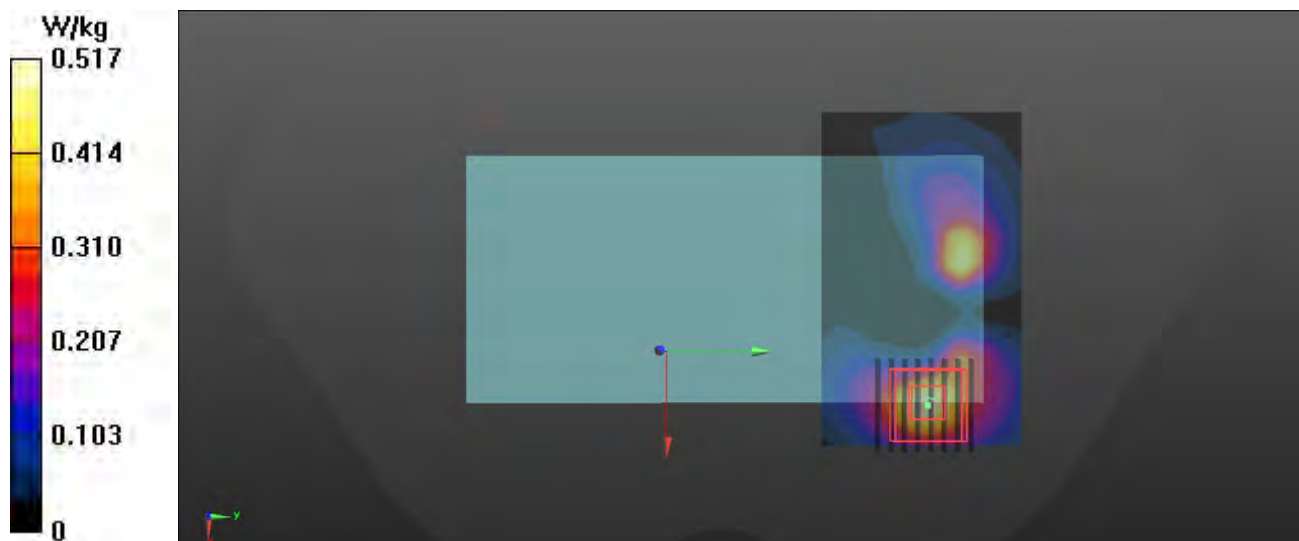

P62-1 802.11a_Left Side_1cm_Ch48_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5240$ MHz; $\sigma = 4.554$ S/m; $\epsilon_r = 37.462$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5240 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.822 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.763 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.7%

Maximum value of SAR (measured) = 0.766 W/kg

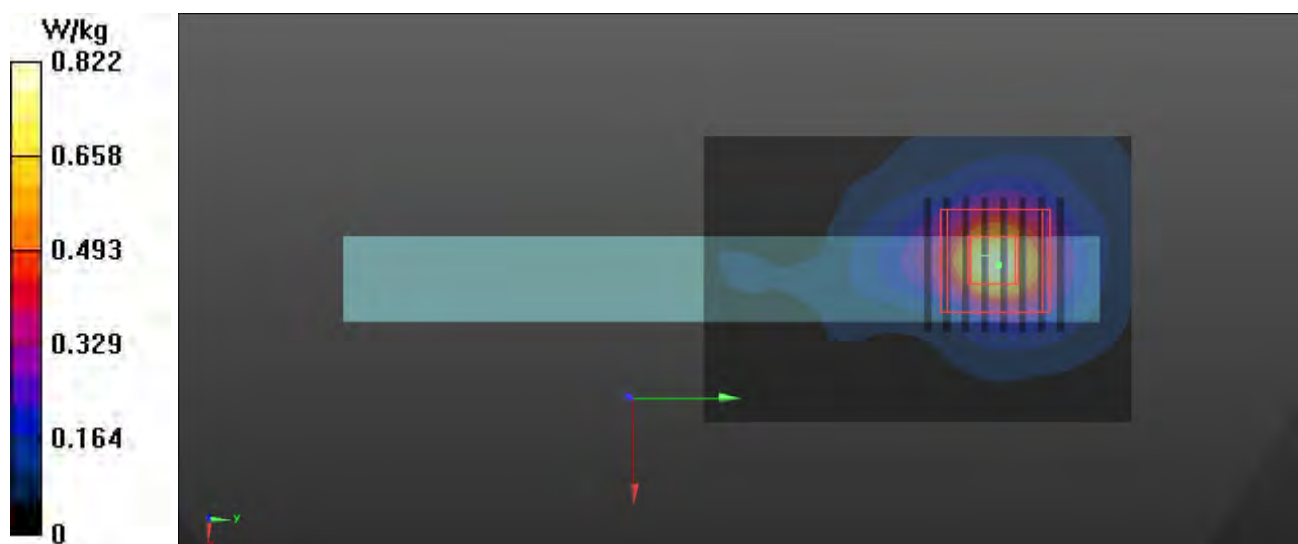

P63 802.11a_Rear Face_1cm_Ch64_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5320$ MHz; $\sigma = 4.632$ S/m; $\epsilon_r = 37.322$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5320 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (111x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.512 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.9950 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 0.365 W/kg

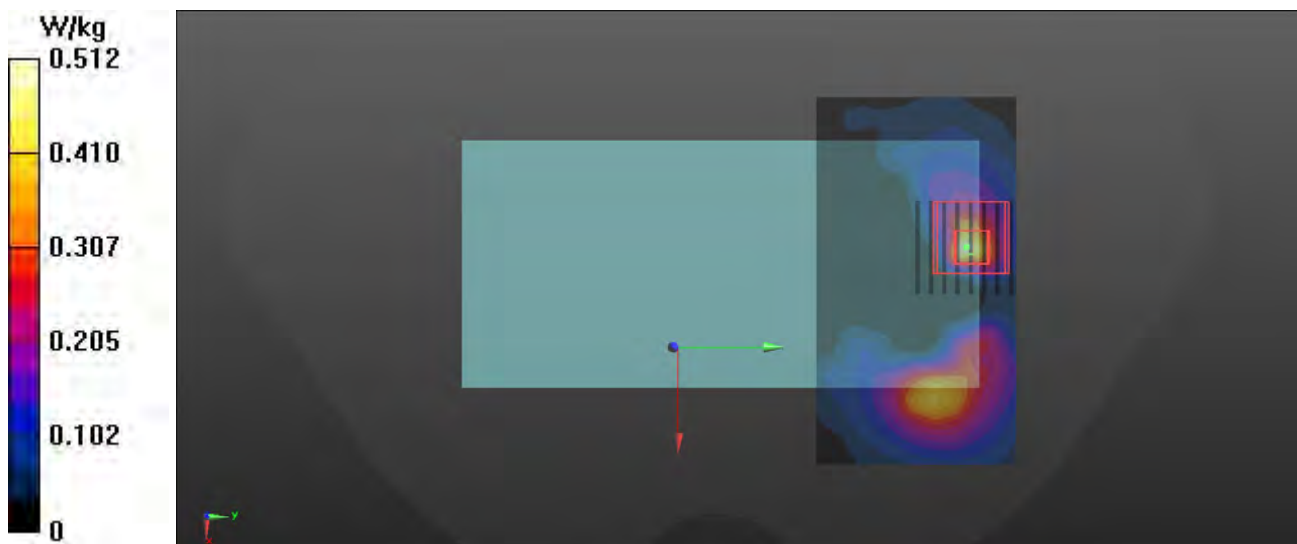

P64 802.11a_Rear Face_1cm_Ch120_Ant 2**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5600$ MHz; $\sigma = 4.938$ S/m; $\epsilon_r = 36.734$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.76, 5.13, 4.73) @ 5600 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.534 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 0.487 W/kg

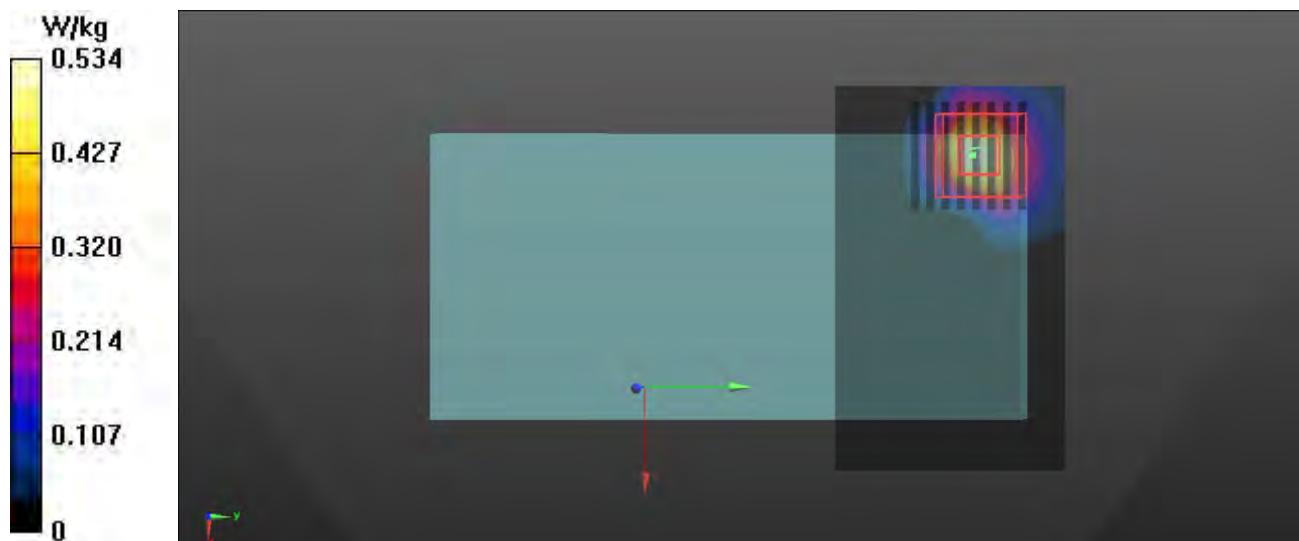

P65 802.11a_Rear Face_1cm_Ch157_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5785$ MHz; $\sigma = 5.129$ S/m; $\epsilon_r = 36.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.66, 5.02, 4.63) @ 5785 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.473 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.6990 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.488 W/kg

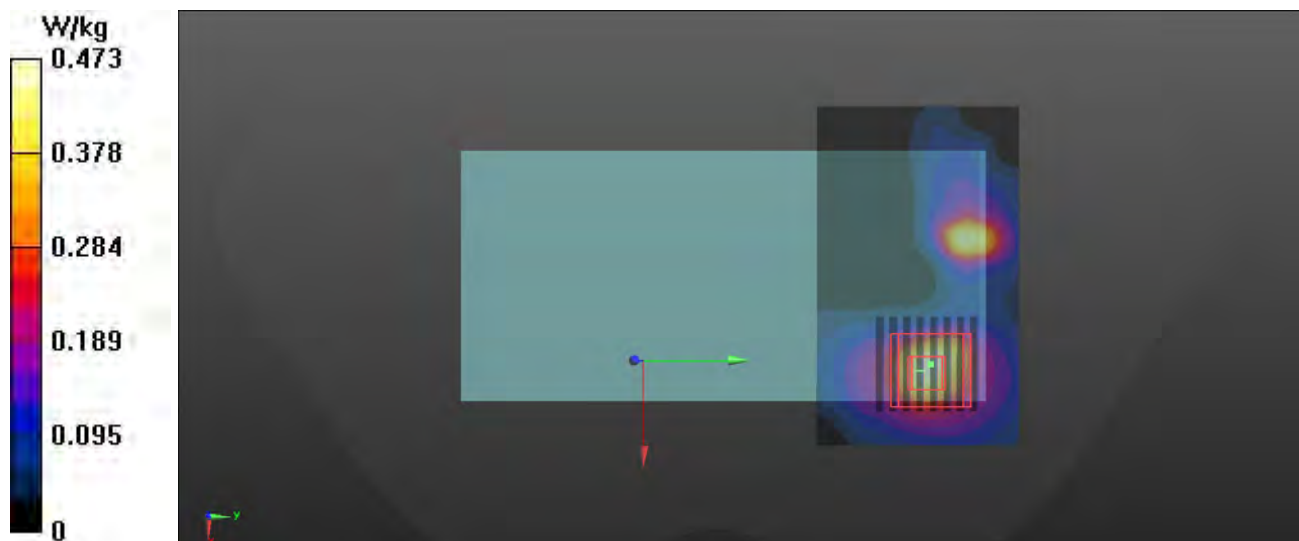

P65-1 802.11a_Left Side_1cm_Ch157_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5785$ MHz; $\sigma = 5.129$ S/m; $\epsilon_r = 36.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.66, 5.02, 4.63) @ 5785 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.504 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.817 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 0.476 W/kg

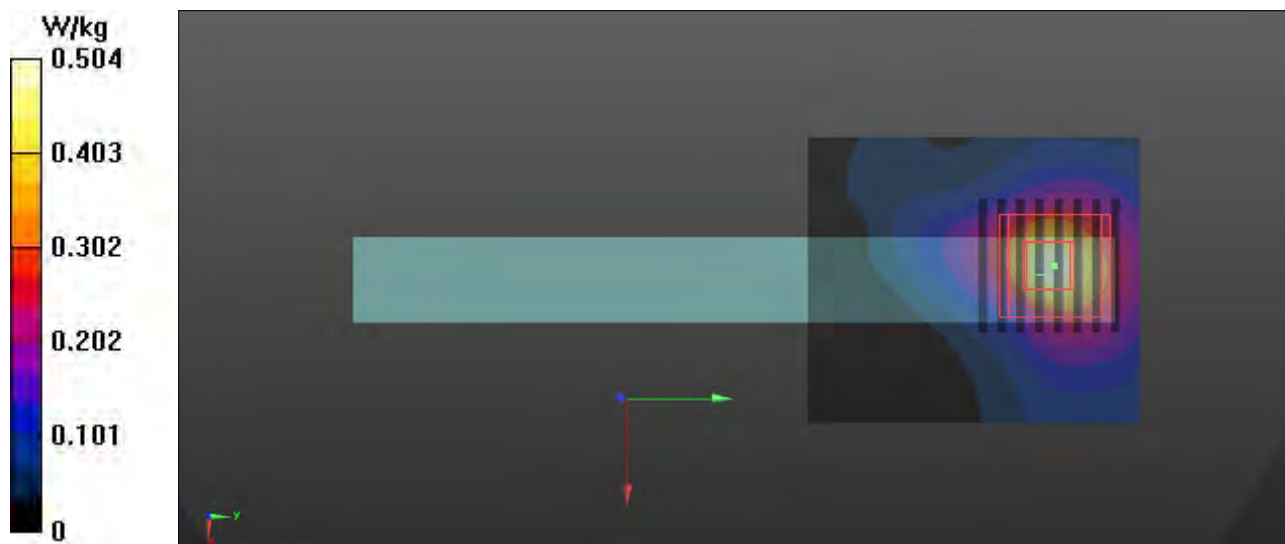

P66 BT_DH5_Rear Face_1cm_Ch78_Ant 1**DUT: EUT**

Communication System: UID 0, BT; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 39.282$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2480 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0158 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.7720 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.00455 W/kg; SAR(10 g) = 0.00202 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 42.3%

Maximum value of SAR (measured) = 0.00875 W/kg

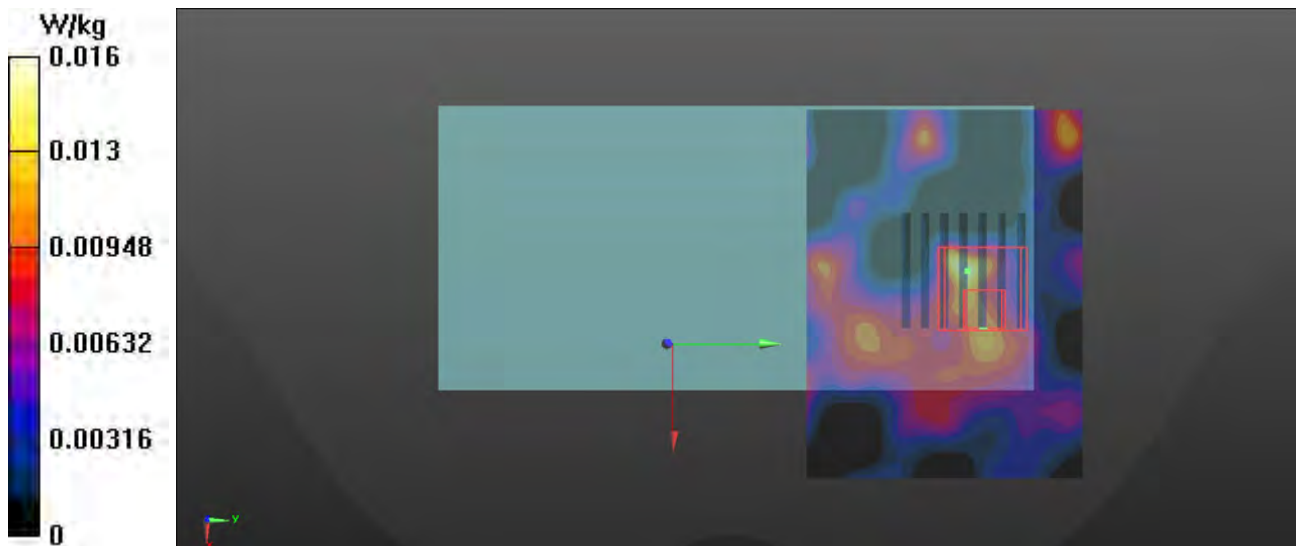

P66-1 2nd_BLE_1M_Front Face_10mm_Ch 0**DUT: EUT**

Communication System: UID 0, 2.4G (0); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2402 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00287 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7460 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.00591 W/kg

SAR(1 g) = 0.00456 W/kg; SAR(10 g) = 0.00413 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 95%

Maximum value of SAR (measured) = 0.00497 W/kg

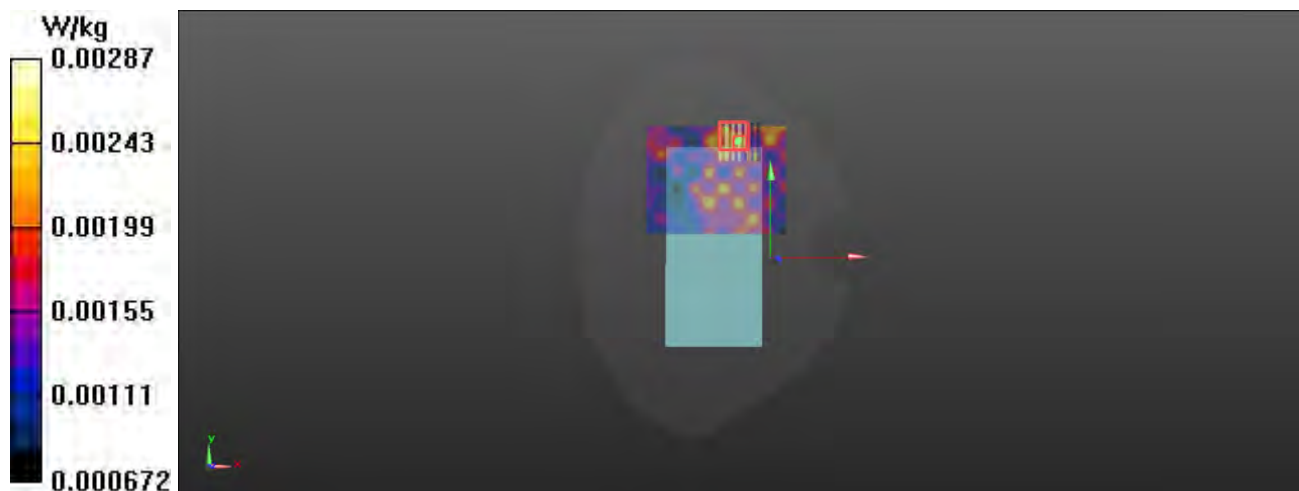

P67 RFID_Rear Face_1cm_902.75MHz**DUT: EUT**

Communication System: UID 0, RFID; Frequency: 902.75 MHz; Duty Cycle: 1:1

Medium: H900 Medium parameters used: $f = 903 \text{ MHz}$; $\sigma = 0.947 \text{ S/m}$; $\epsilon_r = 40.677$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.17, 6.17, 6.17) @ 902.75 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.504 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.29 V/m ; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.317 W/kg ; SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 0.444 W/kg

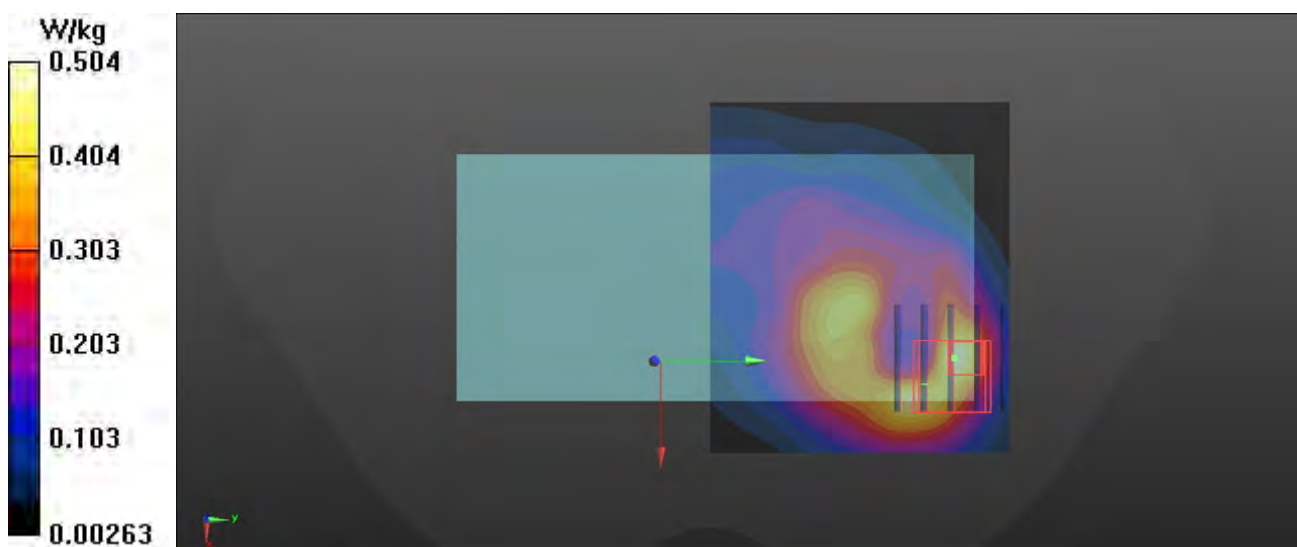

P68 802.11a_Rear Face_0cm_Ch64_Ant 1**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5320$ MHz; $\sigma = 4.632$ S/m; $\epsilon_r = 37.322$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5320 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 6.24 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 2.51 W/kg; SAR(10 g) = 0.446 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 9.17 W/kg

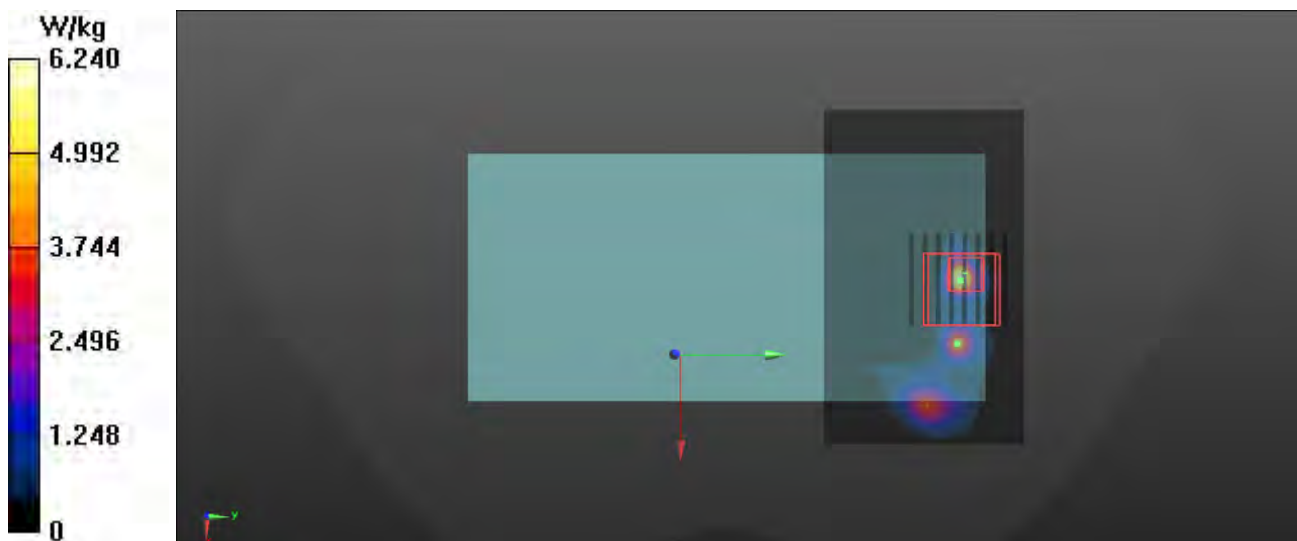

P69 802.11a_Rear Face_0cm_Ch120_Ant 2**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5600$ MHz; $\sigma = 4.938$ S/m; $\epsilon_r = 36.734$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.76, 5.13, 4.73) @ 5600 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 5.12 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.331 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 4.41 W/kg

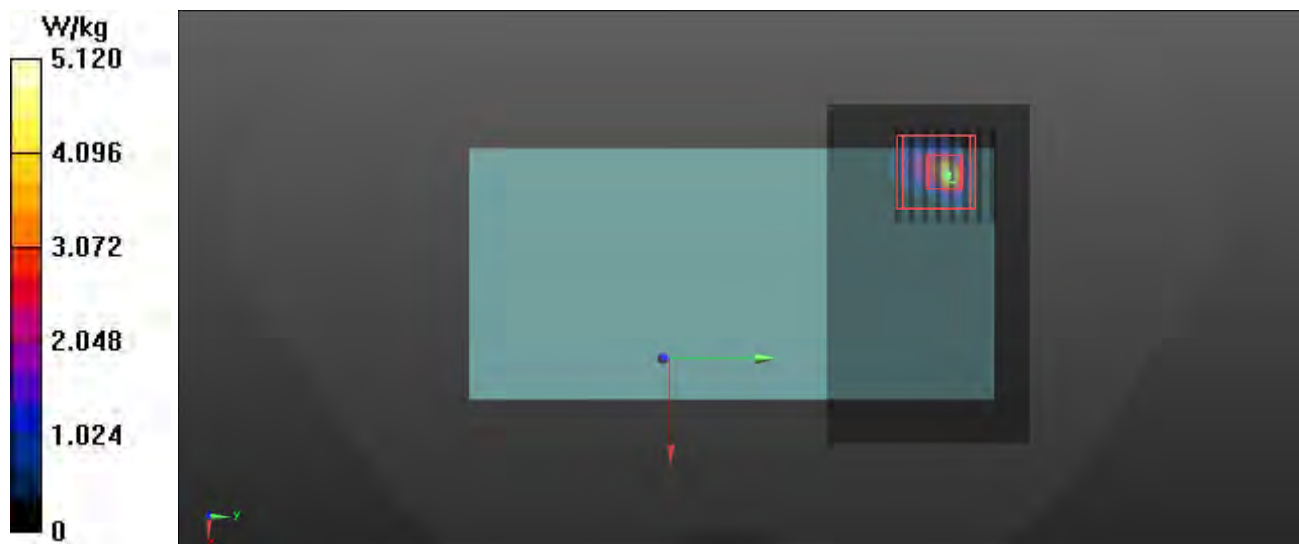

P70 RFID_Front Face_0cm_902.75MHz**DUT: EUT**

Communication System: UID 0, RFID; Frequency: 902.75 MHz; Duty Cycle: 1:1

Medium: H900 Medium parameters used: $f = 903 \text{ MHz}$; $\sigma = 0.947 \text{ S/m}$; $\epsilon_r = 40.677$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.17, 6.17, 6.17) @ 902.75 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.48 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.319 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.03 W/kg ; SAR(10 g) = 0.524 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 1.83 W/kg

