

# TEST REPORT

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 443-390, Korea  
TEL: 82 70 5008 1021  
FAX: 82 505 299 8311

Report No.: KCTL15-FR0082

Page( 1 ) / (17) Pages

**KCTL**  
<http://www.kctl.co.kr>

## 1. Applicant

Name: IDP Corp., Ltd.  
Address: (Guro-dong, Buycksan digital valley 7), 601, 50, Digital-ro33-gil, Guro-gu, Seoul, Korea

## 2. Sample Description:

FCC ID: VU2-SMART-70P  
Type of equipment: Card Printer  
Basic Model: SMART-70P  
Variant Model: SOLID-700P

3. Date of Test: November 17 ~ November 20, 2015

4. Test method used: FCC Part 15 Subpart C 15.225

## 5. Test Results

Test Item: Refer to page 6  
Result: Refer to page 7 ~ page 16  
Measurement Uncertainty: Refer to page 6

This result shown in this report refers only to the sample(s) tested unless otherwise stated.

|             |                                                                                                             |                                                                                                           |
|-------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Affirmation | Tested by                                                                                                   | Technical Manager                                                                                         |
|             | <br>Name: KIM, TAE YOUNG | <br>Name: SON, MIN GI |

2015. 12. 03

**KCTL Inc.** Testing Laboratory

**[ Contents ]**

|                                              |           |
|----------------------------------------------|-----------|
| <b>1. Client information .....</b>           | <b>3</b>  |
| <b>2. Laboratory information .....</b>       | <b>4</b>  |
| <b>3. Description of E.U.T. ....</b>         | <b>5</b>  |
| 3.1 Basic description.....                   | 5         |
| 3.2 General description.....                 | 5         |
| 3.3 Test frequency.....                      | 5         |
| <b>4. Summary of test results.....</b>       | <b>6</b>  |
| 4.1 Standards & results .....                | 6         |
| 4.2 Uncertainty .....                        | 6         |
| <b>5. Test results.....</b>                  | <b>7</b>  |
| 5.1 Antenna Requirement .....                | 7         |
| 5.2 In-band Fundamental Emission .....       | 8         |
| 5.3 In-band Spurious Emission.....           | 10        |
| 5.4 Out-of-band Spurious Emission.....       | 11        |
| 5.5 Frequency tolerance.....                 | 14        |
| 5.6 Conducted Emissions.....                 | 15        |
| <b>6. Test equipment used for test .....</b> | <b>17</b> |

## 1. Client information

**Applicant:** IDP Corp., Ltd.  
**Address:** (Guro-dong, Buyeoksan digital valley 7), 601, 50, Digital-ro33-gil,  
Guro-gu, Seoul, Korea  
**Telephone number:** +82-2-6099-3700  
**Facsimile number:** +82-2-6099-3717  
**Contact person:** Yong-Tae Kim / kmyt@idp-corp.com

**Manufacturer:** IDP Corp., Ltd.  
**Address:** (Guro-dong, Buyeoksan digital valley 7), 601, 50, Digital-ro33-gil,  
Guro-gu, Seoul, Korea

## 2. Laboratory information

### Address

#### **KCTL Inc.**

65 Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea

Telephone Number: 82-70-5008-1016 Facsimile Number: 82-505-299-8311

### Certificate

KOLAS No.: 231

FCC Site Designation No.: KR0040

FCC Site Registration No.: 687132

VCCI Site Registration No.: R-3327, G-198, C-3706, T-1849

IC Site Registration No.:8035A-2

### SITE MAP



### 3. Description of E.U.T.

#### 3.1 Basic description

|                         |                                                                                          |
|-------------------------|------------------------------------------------------------------------------------------|
| Applicant:              | IDP Corp., Ltd.                                                                          |
| Address of Applicant    | (Guro-dong, Buycksan digital valley 7), 601, 50, Digital-ro33-gil, Guro-gu, Seoul, Korea |
| Manufacturer            | IDP Corp., Ltd.                                                                          |
| Address of Manufacturer | (Guro-dong, Buycksan digital valley 7), 601, 50, Digital-ro33-gil, Guro-gu, Seoul, Korea |
| Type of equipment       | Card Printer                                                                             |
| Basic Model             | SMART-70P                                                                                |
| Variant Model           | SOLID-700P                                                                               |
| Serial number           | N/A                                                                                      |

#### 3.2 General description

|                             |                                                                  |
|-----------------------------|------------------------------------------------------------------|
| Operating Frequency         | 13.560 MHz                                                       |
| Frequency Range             | 13.560 MHz                                                       |
| Type of Modulation          | ASK                                                              |
| Number of Channels          | 1 channel                                                        |
| Type of Antenna             | Loop Antenna                                                     |
| Power supply                | DC 24 V                                                          |
| Operating Temperature       | -20 °C ~ 50 °C                                                   |
| Product SW/HW version       | smart70_app_1_02_19_SPI /<br>MAIN_70_PRT BD, SMART70 PRT, 0.2    |
| Radio SW/HW version         | smart70_app_1_02_19_SPI /<br>RF_TAG2_70_PRT BD, SMART70 PRT, 0.2 |
| Test SW Version             | None, this device operates as soon as pushing power "ON" button. |
| RF power setting in TEST SW | N/A                                                              |

Note : The above EUT information was declared by the manufacturer.

#### 3.3 Test frequency

|           |            |
|-----------|------------|
| Frequency | 13.560 MHz |
|-----------|------------|

## 4. Summary of test results

### 4.1 Standards & results

| Rule Reference                                                             | Parameter                     | Status |
|----------------------------------------------------------------------------|-------------------------------|--------|
| 15.203                                                                     | Antenna Requirement           | C      |
| 15.225 (a)                                                                 | In-band Fundamental Emission  | C      |
| 15.225 (b)                                                                 | In-band Spurious Emission     | C      |
| 15.225 (c)                                                                 | In-band Spurious Emission     | C      |
| 15.225 (d)<br>15.209                                                       | Out-of-band Spurious Emission | C      |
| 15.225 (e)                                                                 | Frequency Stability Tolerance | C      |
| 15.207                                                                     | Conducted Emissions           | C      |
| Note: C=complies<br>NC= Not complies<br>NT=Not tested<br>NA=Not Applicable |                               |        |

### 4.2 Uncertainty

| Measurement Item            | Expanded Uncertainty<br>$U = kU_c (k = 2)$ |                    |
|-----------------------------|--------------------------------------------|--------------------|
| Radiated Spurious Emissions | 30 MHz ~ 300 MHz:                          | +4.94 dB, -5.06 dB |
|                             |                                            | +4.93 dB, -5.05 dB |
|                             | 300 MHz ~ 1 000 MHz:                       | +4.97 dB, -5.08 dB |
|                             |                                            | +4.84 dB, -4.96 dB |
| Conducted Emissions         | 9 kHz ~ 150 kHz:                           | 3.75 dB            |
|                             | 150 kHz ~ 30 MHz:                          | 3.36 dB            |

## 5. Test results

### 5.1 Antenna Requirement

#### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 5.1.2 Result

-Complied

The Loop Antenna is permanently attached on PCB board.

## 5.2 In-band Fundamental Emission

### 5.2.1 Minimum Standard

15.225 (a) The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

### 5.2.2 Measurement Procedure

Test Procedure The Radiated Electric Field Strength intensity has been measured on semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9 kHz to 30 MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

Frequency : From 30 MHz to 1 GHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector. The radiated emission measurements were made with the following detector function of the test receiver (below 1 GHz).

| Frequency     | 9 - 90 kHz | 90 - 110 kHz | 150 - 490 kHz | 490 kHz - 30 MHz | 30 MHz -1 GHz |
|---------------|------------|--------------|---------------|------------------|---------------|
| Detector type | PK/AV      | QP           | PK/AV         | QP               | QP            |
| IF bandwidth  | 200 Hz     | 200 Hz       | 9 kHz         | 9 kHz            | 120 kHz       |

\* Part 15 Section 15.31 (f)(2) (9 kHz - 30 MHz)

[Limit at 3m]=[Limit at 300m]-40 x log(3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

### 5.2.3 Test Result

- **Complies**

| Voltage<br>[v] | Frequency<br>[MHz] | Reading<br>[dB $\mu$ V] | Correction<br>Factor [dB] | field strength<br>dBuV/m<br>at 3 m | Limit<br>dBuV/m<br>at 3 m | Margin<br>[dB] |
|----------------|--------------------|-------------------------|---------------------------|------------------------------------|---------------------------|----------------|
| 24             | 13.561             | 50.9                    | -12.2                     | 38.7                               | 124                       | 85.3           |

Note: Field strength limit was calculated with 40 dB/dec

## 5.3 In-band Spurious Emission

### 5.3.1 Regulation

15.225 (b) With in the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

15.225 (c) With in the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

### 5.3.2 Test Result

- **Complied**

Measurement Distance: 3 m

| Frequency<br>[MHz] | Receiver<br>Bandwidth<br>[kHz] | Reading<br>[dB(μV)] | Pol.<br>[V/H] | Factor<br>[dB] | Limit<br>[dB(μV/m)] | Result<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------|--------------------------------|---------------------|---------------|----------------|---------------------|----------------------|----------------|
| <b>QP DATA.</b>    |                                |                     |               |                |                     |                      |                |
| 13.216             | 9.0                            | 42.6                | H             | -12.2          | 80.5                | 30.4                 | 50.1           |
| 13.467             | 9.0                            | 40.6                | H             | -12.2          | 90.5                | 28.4                 | 62.1           |
| 13.569             | 9.0                            | 42.7                | H             | -12.2          | 90.5                | 30.5                 | 60.0           |
| 14.000             | 9.0                            | 38.4                | H             | -12.2          | 80.5                | 26.2                 | 54.3           |

**Margin (dB) = Limit – Actual**

**[Result] = Reading – Amp Gain + AF + CL**

1. H = Horizontal, V = Vertical Polarization

2. AF/CL = Antenna Factor and Cable Loss

## 5.4 Out-of-band Spurious Emission

### 5.4.1 Regulation

15.225 (d) The Field Strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in 15.209

| Frequency (MHz) | Field Strength ( $\mu V/m$ ) | Measurement distance (meters) |
|-----------------|------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                  | 300                           |
| 0.490-1.705     | 24000/F(kHz)                 | 30                            |
| 1.705-30.0      | 30(29.54 dB $\mu V/m$ )      | 30                            |
| 30.0-88.0       | 100(40 dB $\mu V/m$ )        | 3                             |
| 88-216          | 150(43.5 dB $\mu V/m$ )      | 3                             |
| 216-960         | 200 (46 dB $\mu V/m$ )       | 3                             |
| Above 960       | 500 (53.98 dB $\mu V/m$ )    | 3                             |

### 5.4.2 Measurement Procedure

The spurious emissions from the EUT will be measured on an 10 m Anechoic chamber in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna.

The antenna was positioned 3, 10 or 30 meters horizontally from the EUT.

Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

In the case where larger measuring distances are required the results will extrapolated based on the values measuring on the closer distances according to Section 15.31 (f) (2) [2].

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dB $\mu V/m$ , is arrived at by taking the reading from the EMI receiver (Level dB $\mu V$ ) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.

The EUT was placed on the top of the 0.8 meter height, 1 x 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1 000 MHz using the BILOG antenna. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 10 m chamber. The EUT was tested at a distance 3 meters.

Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

### 5.4.3 Test Result

-Complied

Measurement Distance: 3 m

-Below 30 MHz

| Frequency<br>[MHz] | Receiver<br>Bandwidth<br>[kHz] | Reading<br>[dB(μV)] | Pol.<br>[V/H] | Factor<br>[dB] | Limit<br>[dB(μV/m)] | Result<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------|--------------------------------|---------------------|---------------|----------------|---------------------|----------------------|----------------|
| <b>QP DATA.</b>    |                                |                     |               |                |                     |                      |                |
| 0.496              | 9.0                            | 56.3                | V             | -13.5          | 73.7                | 42.8                 | 30.9           |
| 0.995              | 9.0                            | 50.1                | V             | -13.5          | 69.3                | 36.6                 | 32.7           |
| 21.366             | 9.0                            | 41.1                | H             | -12.4          | 69.5                | 28.7                 | 40.8           |

-Above 30 MHz

| Frequency<br>[MHz] | Receiver<br>Bandwidth<br>[kHz] | Reading<br>[dB(μV)] | Pol.<br>[V/H] | Factor<br>[dB] | Limit<br>[dB(μV/m)] | Result<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------|--------------------------------|---------------------|---------------|----------------|---------------------|----------------------|----------------|
| <b>QP DATA.</b>    |                                |                     |               |                |                     |                      |                |
| 106.994            | 120.0                          | 59.3                | V             | -20.2          | 43.5                | 39.1                 | 4.4            |
| 200.235            | 120.0                          | 49.1                | V             | -19.0          | 43.5                | 30.1                 | 13.4           |
| 479.959            | 120.0                          | 35.5                | H             | -10.0          | 46.0                | 25.5                 | 20.5           |
| 906.395            | 120.0                          | 18.2                | H             | -0.9           | 46.0                | 17.3                 | 28.7           |

**Margin (dB) = Limit – Actual**

**[Result] = Reading – Amp Gain + AF + CL**

1. H = Horizontal, V = Vertical Polarization

2. AF/CL = Antenna Factor and Cable Loss

\* The spurious emission at the frequency does not fall in the restricted bands.

\*\* The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

## 5.5 Frequency tolerance

### 5.5.1 Regulation

15.225 (e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01$  % of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 5.5.2 Test Result

- **Complied**

| VOLTAGE<br>[%] | POWER<br>[V] | TEMP<br>[°C] | FREQ<br>[Hz] | FREQ.DEV<br>[Hz] | Deviation<br>[%] |
|----------------|--------------|--------------|--------------|------------------|------------------|
| 100            | 24           | 20           | 13 562 247   | -2 247           | -0.016 57        |
|                |              | -20          | 13 562 292   | -2 292           | -0.016 90        |
|                |              | -10          | 13 562 291   | -2 291           | -0.016 89        |
|                |              | 0            | 13 562 297   | -2 297           | -0.016 94        |
|                |              | 10           | 13 562 296   | -2 296           | -0.016 93        |
|                |              | 20           | 13 562 290   | -2 290           | -0.016 89        |
|                |              | 25           | 13 562 279   | -2 279           | -0.016 80        |
|                |              | 30           | 13 562 260   | -2 260           | -0.016 66        |
|                |              | 40           | 13 562 247   | -2 247           | -0.016 57        |
|                |              | 50           | 13 562 252   | -2 252           | -0.016 60        |
| 85             | 20.4         | 20           | 13 562 265   | -2 265           | -0.016 70        |
| 115            | 27.6         | 20           | 13 562 266   | -2 266           | -0.016 71        |

## 5.6 Conducted Emission

### 5.6.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |            |
|-----------------------------|------------------------------|------------|
|                             | Quasi-peak                   | Average    |
| 0.15 – 0.5                  | 66 to 56 *                   | 56 to 46 * |
| 0.5 – 5                     | 56                           | 46         |
| 5 – 30                      | 60                           | 50         |

\* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.


### 5.6.2 Measurement Procedure

- 1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
- 2) Each current-carrying conductor of the EUT power cord was individually connected through a 50 $\Omega$ /50 $\mu$  H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
- 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
- 5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

### 5.6.3 Test Result

- Complied

Figure4. The plot of Conducted Emission

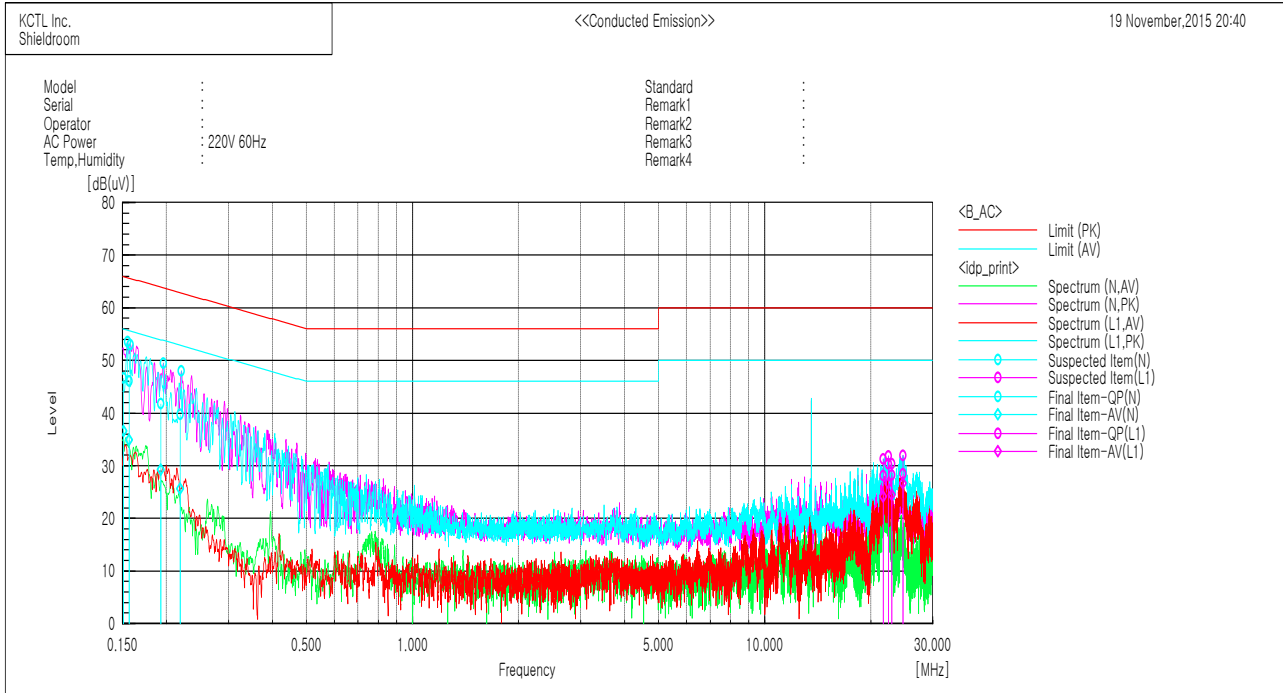

#### Final Result

--- N Phase ---

| No. | Frequency | Reading QP | Reading CAV | c.f  | Result QP | Result CAV | Limit QP | Limit AV | Margin QP | Margin CAV |
|-----|-----------|------------|-------------|------|-----------|------------|----------|----------|-----------|------------|
|     | [MHz]     | [dB(uV)]   | [dB(uV)]    | [dB] | [dB(uV)]  | [dB(uV)]   | [dB(uV)] | [dB(uV)] | [dB]      | [dB]       |
| 1   | 0.15117   | 36.6       | 26.5        | 10.0 | 46.6      | 36.5       | 65.9     | 55.9     | 19.3      | 19.4       |
| 2   | 0.15666   | 36.0       | 24.9        | 10.0 | 46.0      | 34.9       | 65.6     | 55.6     | 19.6      | 20.7       |
| 3   | 0.21904   | 29.7       | 15.5        | 10.0 | 39.7      | 25.5       | 62.9     | 52.9     | 23.2      | 27.4       |
| 4   | 0.19266   | 31.7       | 19.1        | 10.1 | 41.8      | 29.2       | 63.9     | 53.9     | 22.1      | 24.7       |

--- L1 Phase ---

| No. | Frequency | Reading QP | Reading CAV | c.f  | Result QP | Result CAV | Limit QP | Limit AV | Margin QP | Margin CAV |
|-----|-----------|------------|-------------|------|-----------|------------|----------|----------|-----------|------------|
|     | [MHz]     | [dB(uV)]   | [dB(uV)]    | [dB] | [dB(uV)]  | [dB(uV)]   | [dB(uV)] | [dB(uV)] | [dB]      | [dB]       |
| 1   | 22.45225  | 20.5       | 16.7        | 9.8  | 30.3      | 26.5       | 60.0     | 50.0     | 29.7      | 23.5       |
| 2   | 21.67895  | 18.2       | 14.3        | 9.8  | 28.0      | 24.1       | 60.0     | 50.0     | 32.0      | 25.9       |
| 3   | 24.69023  | 18.7       | 16.8        | 9.7  | 28.4      | 26.5       | 60.0     | 50.0     | 31.6      | 23.5       |
| 4   | 22.95349  | 18.3       | 14.7        | 9.8  | 28.1      | 24.5       | 60.0     | 50.0     | 31.9      | 25.5       |

## 6. Test equipment used for test

|   | Description          | Manufacturer      | Model No.  | Serial No. | Next Cal Date. |
|---|----------------------|-------------------|------------|------------|----------------|
| ■ | Spectrum Analyzer    | R&S               | FSV30      | 100807     | 16.09.02       |
| ■ | Temp & Humid Chamber | ESPEC CORP.       | SH-661     | 92004048   | 16.03.06       |
| ■ | Test Receiver        | ESCI              | 100001     | R&S        | 16.08.04       |
| ■ | DC Power Supply      | AGILENT           | E3632A     | MY40004399 | 16.01.06       |
| ■ | Signal Generator     | R&S               | SMR40      | 100007     | 16.06.15       |
| ■ | Amplifier            | SONOMA INSTRUMENT | 310        | 186280     | 16.09.01       |
| ■ | Loop Antenna         | R&S               | HFH2-Z2    | 861971/003 | 17.03.03       |
| ■ | Bi-Log Antenna       | SCHWARZBECK       | VULB9163   | 552        | 16.06.14       |
| ■ | Attenuator           | AGILENT           | 8491A      | MY52460424 | 16.07.13       |
| ■ | Turn Table           | Innco Systems     | DT2000S-1t | 79         | -              |
| ■ | Antenna Mast         | Innco Systems     | MA4000-EP  | 303        | -              |
| ■ | Two-Line-V-network   | R&S               | ESH3-Z6    | 100051     | 16.09.03       |
| ■ | EMI Test Receiver    | R&S               | ESR        | 101078     | 16.02.16       |