

FCC Test Report

Equipment : RV340W Dual WAN Wireless-AC VPN Router
Brand Name : CISCO
Model No. : RV340W
FCC ID : VUI-RV340W
Standard : 47 CFR FCC Part 15
Applicant : **PEGATRON CORPORATION**
5F., NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI
CITY 11259 Taiwan
Manufacturer : **MAINTEK COMPUTER (SUZHOU) CO., LTD**
Bldg. 6 NB, 233 Jin Feng Rd, Suzhou District Jiangsu
China

The product sample received on Jun. 06, 2016 and completely tested on Aug. 05, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Kevin Liang / Assistant Manager





Table of Contents

1	CO-LOCATION	4
1.1	Transmitter Radiated Unwanted Emissions	4
1.1.1	Transmitter Radiated Unwanted Emissions Limit	4
1.1.2	Measuring Instruments	4
1.1.3	Test Procedures	5
1.1.4	Test Setup	6
1.1.5	Transmitter Radiated Unwanted Emissions (Below 30 MHz).....	7
1.1.6	Results of Radiated Emissions (30 MHz – 1 GHz).....	8
1.1.7	Results for Radiated Emissions (1 GHz - 10th Harmonic)	10
1.2	Test Equipment and Calibration Data	12

1 CO-LOCATION

1.1 Transmitter Radiated Unwanted Emissions

1.1.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

1.1.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

1.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 1 (spectral trace averaging)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 2 (slow sweep speed).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.2 and 8.1.1 measurement procedure peak limit.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.1 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 10.2.1.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 10.2.2.
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB


1.1.4 Test Setup

Transmitter Spurious and Out of Band Emissions (9 kHz - 30 MHz)

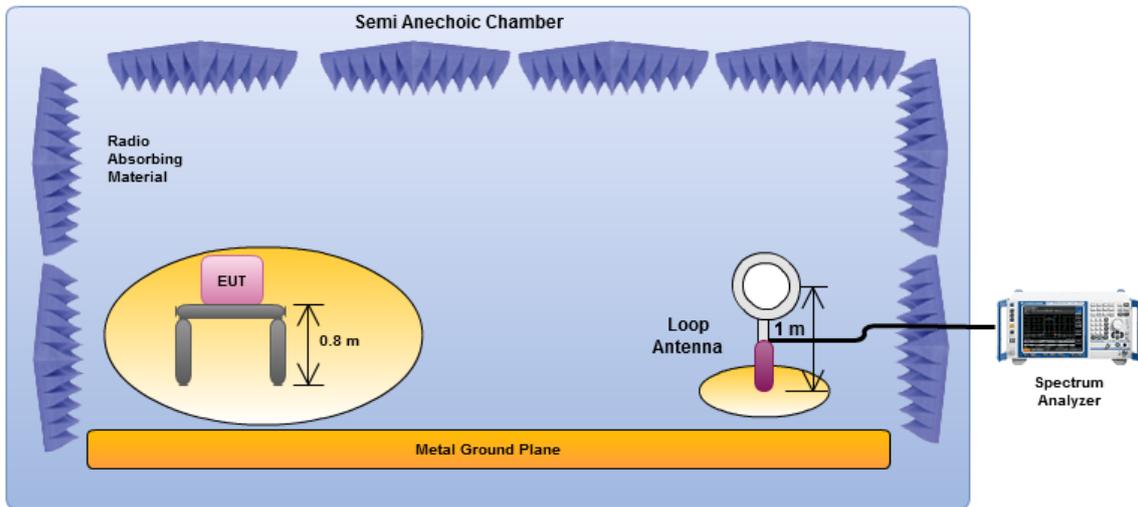


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna.

Transmitter Radiated Unwanted Emissions (Below 1 GHz)

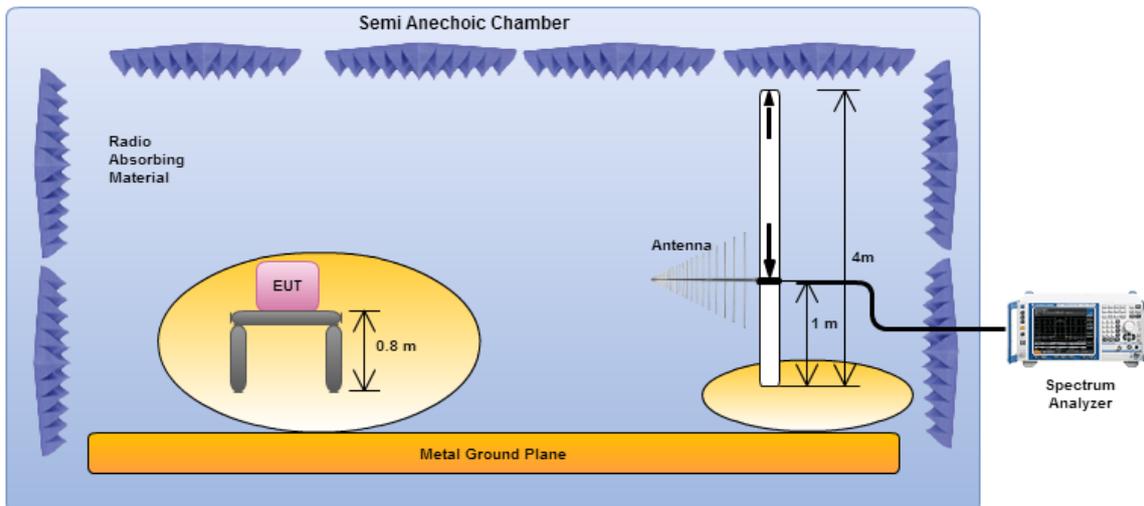

Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

Transmitter Radiated Unwanted Emissions (below 1 GHz)

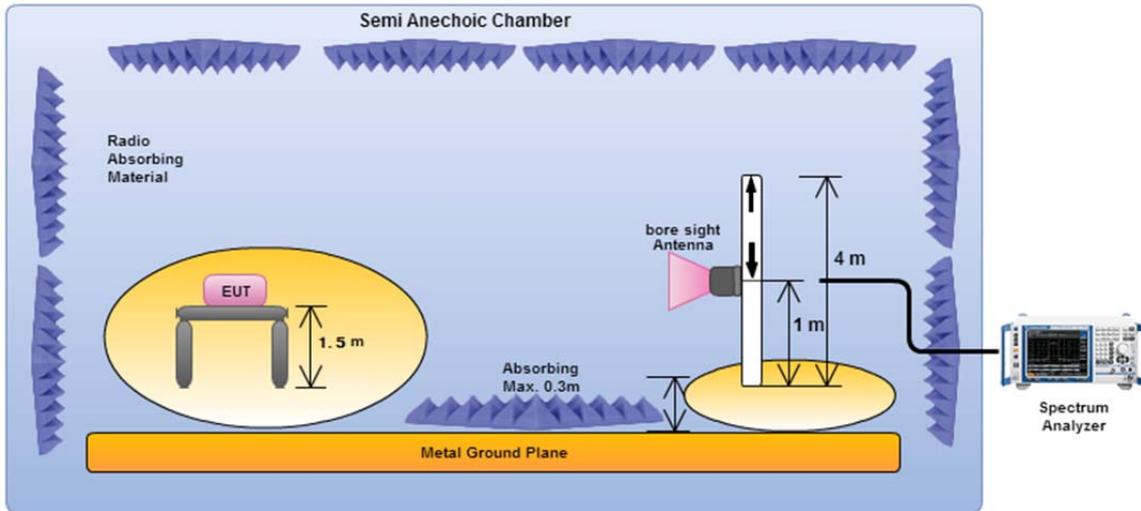


Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

1.1.5 Transmitter Radiated Unwanted Emissions (Below 30 MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. Any spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported.


1.1.6 Results of Radiated Emissions (30 MHz – 1 GHz)

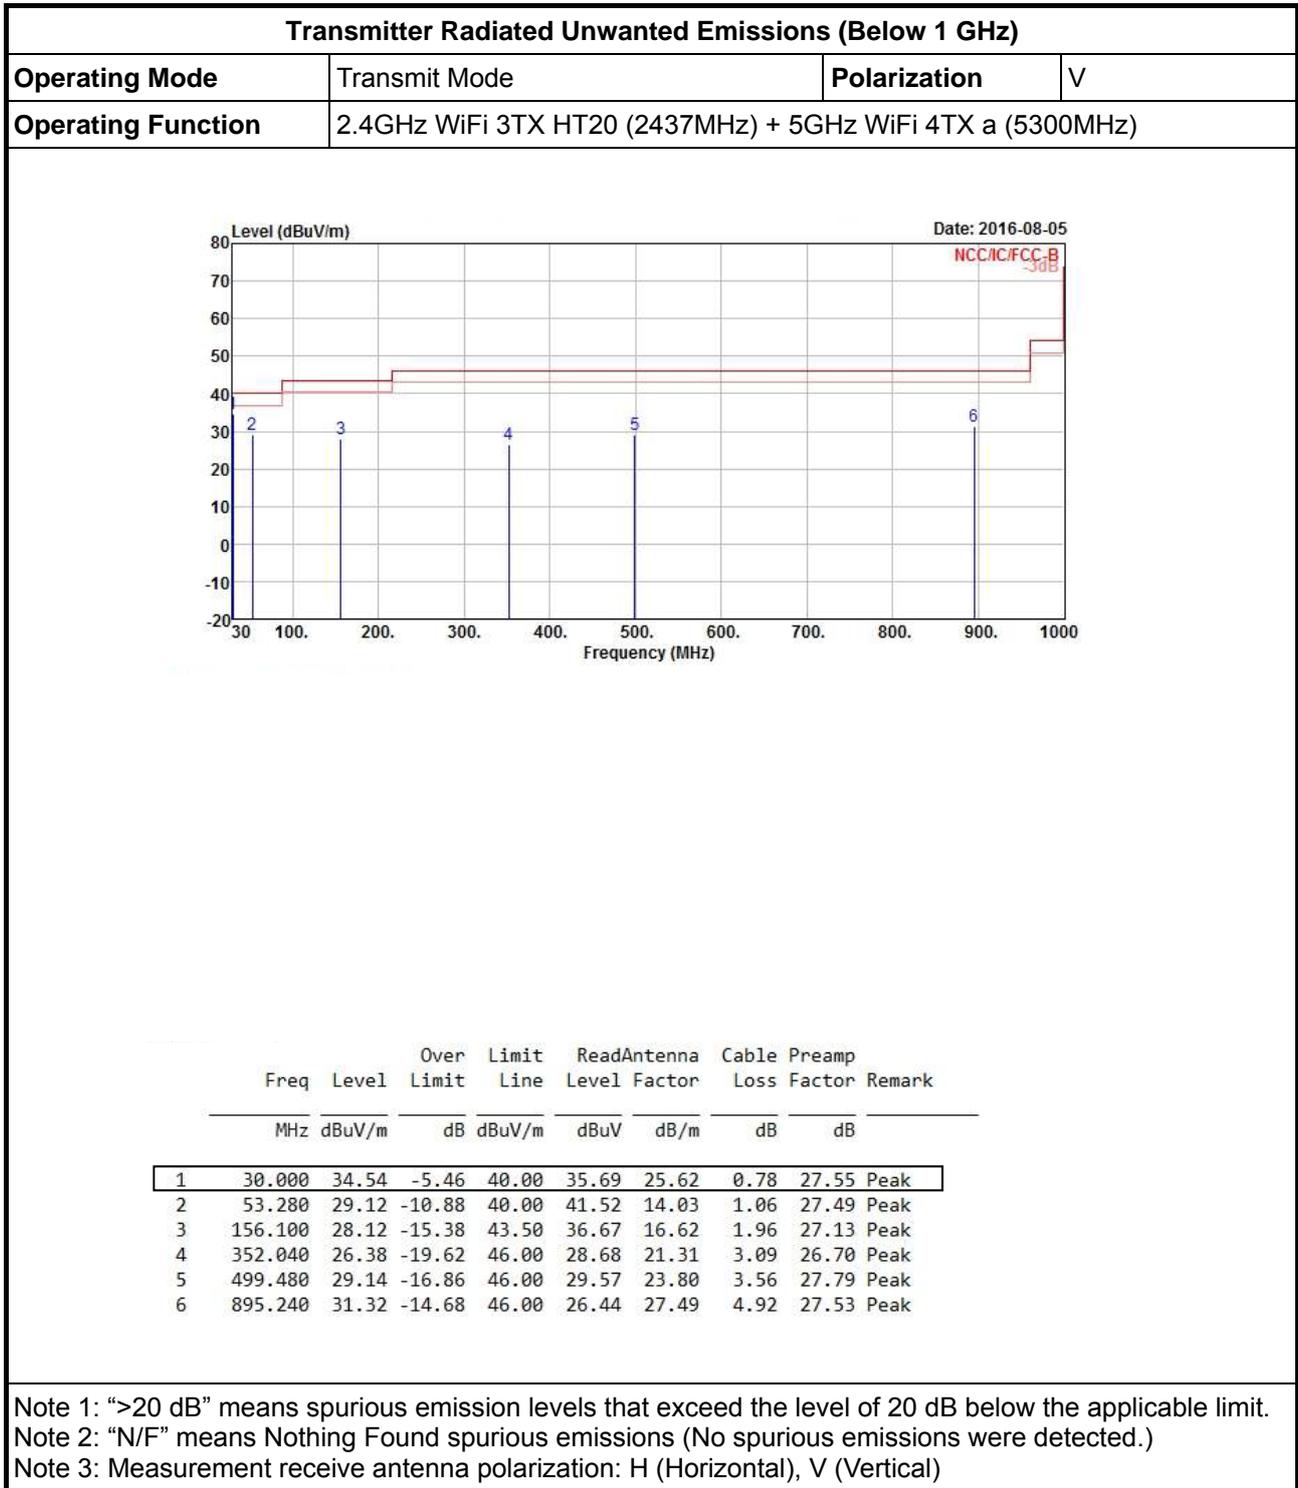



Transmitter Radiated Unwanted Emissions (Below 1 GHz)


Operating Mode	Transmit Mode	Polarization	H
Operating Function	2.4GHz WiFi 3TX HT20 (2437MHz) + 5GHz WiFi 4TX a (5300MHz)		

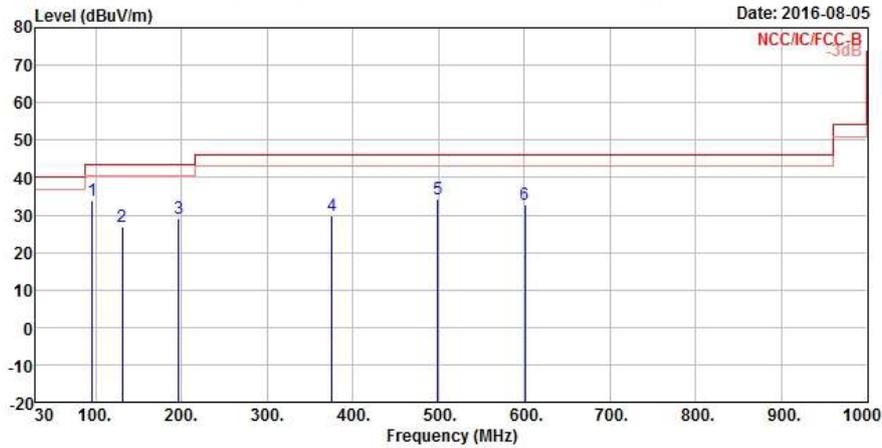

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	95.960	33.75	-9.75	43.50	43.15	16.49	1.51	27.40	Peak
2	130.880	27.04	-16.46	43.50	33.95	18.56	1.77	27.24	Peak
3	196.840	28.96	-14.54	43.50	37.54	16.09	2.26	26.93	Peak
4	375.320	29.70	-16.30	46.00	31.42	21.82	3.16	26.70	Peak
5	499.480	34.29	-11.71	46.00	34.72	23.80	3.56	27.79	Peak
6	600.360	32.86	-13.14	46.00	31.97	24.84	4.07	28.02	Peak

Note 1: ">20 dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


1.1.7 Results for Radiated Emissions (1 GHz - 10th Harmonic)

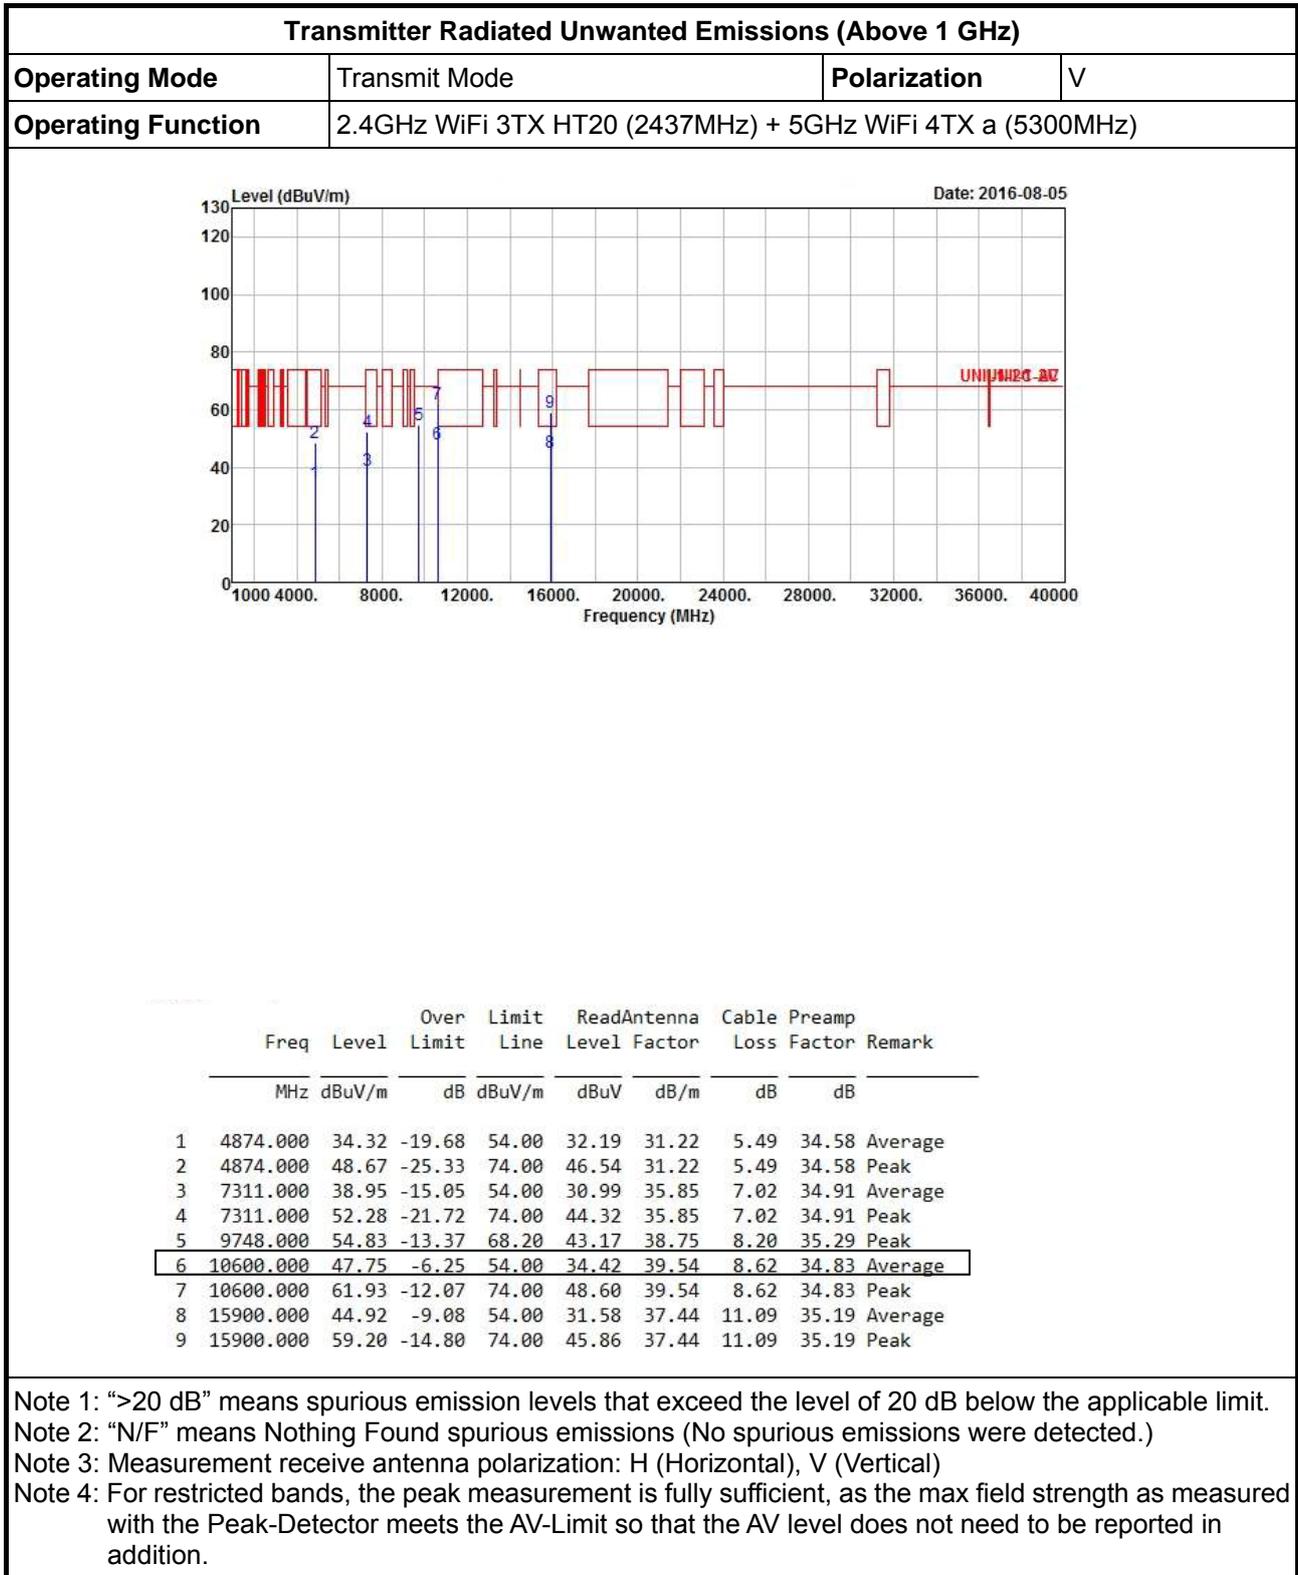



Transmitter Radiated Unwanted Emissions (Above 1 GHz)

Operating Mode	Transmit Mode	Polarization	H
Operating Function	2.4GHz WiFi 3TX HT20 (2437MHz) + 5GHz WiFi 4TX a (5300MHz)		

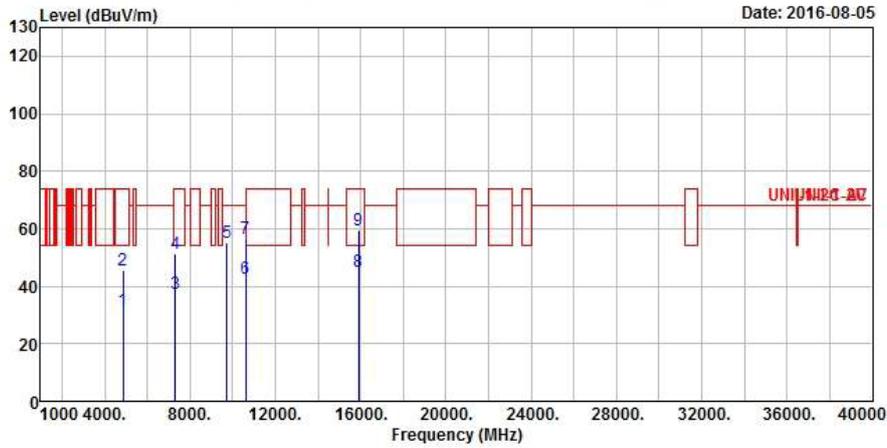

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	31.60	-22.40	54.00	29.47	31.22	5.49	34.58	Average
2	4874.000	45.71	-28.29	74.00	43.58	31.22	5.49	34.58	Peak
3	7311.000	37.64	-16.36	54.00	29.68	35.85	7.02	34.91	Average
4	7311.000	51.53	-22.47	74.00	43.57	35.85	7.02	34.91	Peak
5	9748.000	55.04	-13.16	68.20	43.38	38.75	8.20	35.29	Peak
6	10600.000	42.85	-11.15	54.00	29.52	39.54	8.62	34.83	Average
7	10600.000	56.64	-17.36	74.00	43.31	39.54	8.62	34.83	Peak
8	15900.000	44.87	-9.13	54.00	31.53	37.44	11.09	35.19	Average
9	15900.000	59.27	-14.73	74.00	45.93	37.44	11.09	35.19	Peak

Note 1: ">20 dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



1.2 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 28, 2015	Nov. 27, 2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz ~ 18GHz 3m	Dec. 16, 2015	Dec. 15, 2016
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	MaY 10, 2016	May 09, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 02, 2015	Sep. 01, 2016
Spectrum	R&S	FSV40	101513	9kHz ~ 40GHz	Feb. 16, 2016	Feb. 15, 2017
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 18, 2015	Sep. 17, 2016
Horn Antenna	SCHWARZBECK	BBHA9120D	1531	1GHz ~ 18GHz	Apr. 22, 2016	Apr. 21, 2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 29, 2016	Jan. 28, 2017
Horn Antenna	ETS · LINDGREN	3115	6741	1GHz ~ 18GHz	Jul. 15, 2015	Jul. 14, 2016