

FCC Test Report

Equipment : Wireless module
Brand Name : PEGATRON
Model No. : UPWL6028F
FCC ID : VUIUPWL6028F
Standard : 47 CFR FCC Part 15.247
Frequency Range : 2400 MHz – 2483.5 MHz
Equipment Class : DTS
Applicant : PEGATRON CORPORATION
Manufacturer : 5F., NO. 76, LIGONG ST., BEITOU DISTRICT,
TAIPEI CITY 112 Taiwan

The product sample received on Aug. 28, 2012 and completely tested on Oct. 24, 2012. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

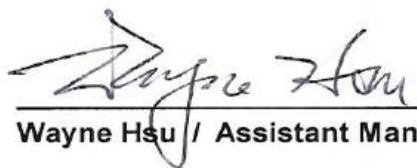

Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment	8
1.3	Testing Applied Standards	8
1.4	Testing Location Information	8
1.5	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Modulation Configuration	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter	11
2.4	The Worst Case Measurement Configuration	12
2.5	Test Setup Diagram	14
3	TRANSMITTER TEST RESULT	16
3.1	AC Power-line Conducted Emissions	16
3.2	6dB Bandwidth.....	19
3.3	RF Output Power	23
3.4	Power Spectral Density.....	30
3.5	Transmitter Radiated Bandedge Emissions	34
3.6	Transmitter Radiated Unwanted Emissions	43
4	TEST EQUIPMENT AND CALIBRATION DATA.....	84
5	CERTIFICATION OF TAF ACCREDITATION	86
APPENDIX A. TEST PHOTOS		A7
APPENDIX B. PHOTOGRAPHS OF EUT		B18

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 16.75MHz 37.40 (Margin 12.60dB) - AV 43.15 (Margin 16.85dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 11B-20M: 8.20 11G-20M: 15.78 11N2.4G-20M: 17.61 11N2.4G-40M: 36.64	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] 11B-20M: 21.19 11G-20M: 25.01 11N2.4G-20M: 28.99 11N2.4G-40M: 29.86	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/3kHz] 11B-20M: -6.15 11G-20M: -9.85 11N2.4G-20M: -11.33 11N2.4G-40M: -12.49	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2400MHz: 29.63dB Restricted Bands [dBuV/m at 3m]: 2487.10MHz 66.34 (Margin 7.66dB) - PK 53.00 (Margin 1.00dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 4874MHz 64.26 (Margin 9.74dB) - PK 52.81 (Margin 1.19dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

Revision History

[illegible]

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
2400-2483.5	b	2412-2462	1-11 [11]	1	21.19	N/A
2400-2483.5	g	2412-2462	1-11 [11]	1	25.01	N/A
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	24.75	N/A
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	1	25.96	N/A
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	28.99	N/A
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	29.83	N/A
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation. Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)						

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☒	Temporary RF connector provided
☐	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information						
No.	Ant. Cat.	Ant. Type	Brand	Part No.	Gain (dBi)	
					2.4G	5G
1	Integral	PCB	Wanshih	UC3WFI0063	2.04	4.62
2	Integral	PCB	Wanshih	UC3WFI0064	3.90	4.48
3	Integral	PCB	Wanshih	UC3WFI0072	2.04	6.21
4	Integral	PCB	Wanshih	UC3WFI0073	5.72	4.93
5	Integral	PCB	Wanshih	UC3WFI0080	4.72	-
6	Integral	PCB	Wanshih	UC3WFI0081	5.65	-
7	Integral	PCB	Wanshih	UC3WFI0082	-	5.16
8	Integral	PCB	Wanshih	UC3WFI0083	-	6.36
9	Integral	PCB	Hong-lin	260-23396	2.32	3.91
10	Integral	PCB	Hong-lin	260-23397	4.64	4.53
11	Integral	PCB	Hong-lin	260-23042	4.36	6.22
12	Integral	PCB	Hong-lin	260-23403	4.40	6.00
13	Integral	PCB	Hong-lin	260-23432	2.58	-
14	Integral	PCB	Hong-lin	260-23434	4.36	-
15	Integral	PCB	Hong-lin	260-23433	-	5.60
16	Integral	PCB	Hong-lin	260-23435	-	6.22
17	Integral	PCB	Airgain	N2420DS (10cm)	3.10	-
18	Integral	PCB	Airgain	N2420DS (27cm)	3.10	-
19	Integral	PCB	Airgain	N2420 (10cm)	3.30	-
20	Integral	PCB	Airgain	N2420 (40cm)	3.30	-
21	Integral	PCB	Airgain	N5x20SC (15cm)	-	1.90
22	Integral	PCB	Airgain	N5x20SC (19cm)	-	1.90
23	Integral	PCB	Airgain	N5x20SC (23cm)	-	1.90
24	Integral	PCB	Airgain	N5x20SC (27cm)	-	1.90

EUT is consist of multiple antenna models assembly (multiple antenna models are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. Then Ant. No. 4 shall be performed the radiated test.

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☒ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle		
☐ Operated normally mode for worst duty cycle		
☒ Operated test mode for worst duty cycle		
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)	Voltage Duty Factor [dB] – (20 log 1/x)
☒ 93.55% - IEEE 802.11b	0.29	0.58
☒ 68.07% - IEEE 802.11g	1.67	3.34
☒ 67.16% - IEEE 802.11n (HT20)	1.73	3.46
☒ 65.45% - IEEE 802.11n (HT40)	1.84	3.68

Note 1: Average Output Power Plots w/o Duty Factor

1.1.5 EUT Operational Condition

Supply Voltage	☐ AC mains	☒ DC	
Type of DC Source	☐ Internal DC supply	☒ Host	☐ Battery

1.2 Support Equipment

Support Equipment - Conducted Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	XPS M1330	DoC
2	iPod	Apple	A1199	N/A
3	(USB) Mouse	Microsoft	1113	N/A
4	Wireless AP (Remote Workstation)	ASUS	RT-AC66U	DoC

Support Equipment - Radiated Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5500	DoC
2	(USB) Mouse	Microsoft	1113	DoC
3	iPod	APPLE	A1199	DoC
4	Wireless AP (Remote Workstation)	ASUS	RT-AC66U	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 558074
- ♦ FCC KDB 662911
- ♦ FCC KDB 412172

1.4 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Ian	25.9°C / 60%	21-Sep-12~18-Oct-12
AC Conduction	CO04-HY	Bill	25.2°C / 49.3%	04-Sep-12
Radiated Emission	03CH03-HY	Daniel	25.6°C / 58%	20-Sep-12 ~ 24-Oct-12

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
IEEE Std. 802.11	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS	Modulation Mode	RF Output Power (dBm)
b	1	1-11 Mbps	1 Mbps	11B-20M	21.19
g	1	6-54 Mbps	6 Mbps	11G-20M	25.01
n (HT20)	1	MCS 0-7	MCS 0	11N2.4G-20M	24.75
n (HT40)	1	MCS 0-7	MCS 0	11N2.4G-40M	25.96
n (HT20)	2	MCS 7-15	MCS 8	11N2.4G-20M	28.99
n (HT40)	2	MCS 7-15	MCS 8	11N2.4G-40M	29.83

Note 1: IEEE Std. 802.11n-2009 modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 800ns.

Note 2: Modulation modes consist below configuration::
 11B: IEEE 802.11b, 11G: IEEE 802.11g, 11N: IEEE 802.11n
 2.4G: 2.4-2.4835GHz band
 20M/40M: Channel Bandwidth 20MHz/40MHz

Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std. 802.11	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
b, g, n (HT20)	2412-(F1), 2437-(F2), 2462-(F3)
n (HT40)	2422-(F4), 2437-(F5), 2452-(F6)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter					
Test Software Version		DOS			
Modulation Mode	Transmit Chains (N_{TX})	Frequency (MHz)	Power Setting	Data Rate / MCS	RF Output Power (dBm)
11B-20M	1	2412	73	1 Mbps	21.19
11B-20M	1	2437	73	1 Mbps	21.01
11B-20M	1	2462	70	1 Mbps	18.45
11G-20M	1	2412	38	6 Mbps	16.04
11G-20M	1	2437	74	6 Mbps	25.01
11G-20M	1	2462	33	6 Mbps	14.10
11N2.4G-20M	1	2412	42	MCS 0	17.25
11N2.4G-20M	1	2437	71	MCS 0	24.75
11N2.4G-20M	1	2462	38	MCS 0	15.86
11N2.4G-40M	1	2422	40	MCS 0	16.35
11N2.4G-40M	1	2437	75	MCS 0	25.96
11N2.4G-40M	1	2452	37	MCS 0	15.22
11N2.4G-20M	2	2412	39	MCS 8	21.13
11N2.4G-20M	2	2437	70	MCS 8	28.99
11N2.4G-20M	2	2462	34	MCS 8	19.54
11N2.4G-40M	2	2422	38	MCS 8	22.45
11N2.4G-40M	2	2437	70	MCS 8	29.83
11N2.4G-40M	2	2452	40	MCS 8	22.56
Note 1: RF output power specifies that Maximum Peak Conducted Output Power.					

2.4 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Radio link (2.4G-WLAN)

The Worst Case Mode for Following Conformance Tests			
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth		
Test Condition	Conducted measurement at transmit chains		
Modulation Mode	Transmit Chains (N_{TX})	Data Rate / MCS	Test Frequency
11B-20M	1	1 Mbps	F1, F2, F3
11G-20M	1	6 Mbps	F1, F2, F3
11N2.4G-20M	1	MCS 0	F1, F2, F3
11N2.4G-40M	1	MCS 0	F4, F5, F6
11N2.4G-20M	2	MCS 8	F1, F2, F3
11N2.4G-40M	2	MCS 8	F4, F5, F6

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
Modulation Mode	Transmit Chains (N_{TX})	Data Rate / MCS	Test Frequency
11B-20M	1	1 Mbps	F1, F3
11G-20M	1	6 Mbps	F1, F3
11N2.4G-20M	1	MCS 0	F1, F3
11N2.4G-40M	1	MCS 0	F4, F6
11N2.4G-20M	2	MCS 8	F1, F3
11N2.4G-40M	2	MCS 8	F4, F6


The Worst Case Mode for Following Conformance Tests		
Tests Item	Transmitter Radiated Unwanted Emissions	
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.	
User Position	☒ EUT will be placed in fixed position. ☐ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two or three orthogonal planes. ☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.	
Operating Mode < 1GHz	☒ 1. Radio link (2.4G-WLAN)	
Modulation Mode	Data Rate / MCS	Test Frequency
11B-20M	1 Mbps	F1, F2, F3
11G-20M	6 Mbps	F1, F2, F3
11N2.4G-20M	MCS 0	F1, F2, F3
11N2.4G-40M	MCS 0	F4, F5, F6
11N2.4G-20M	MCS 8	F1, F2, F3
11N2.4G-40M	MCS 8	F4, F5, F6

2.5 Test Setup Diagram

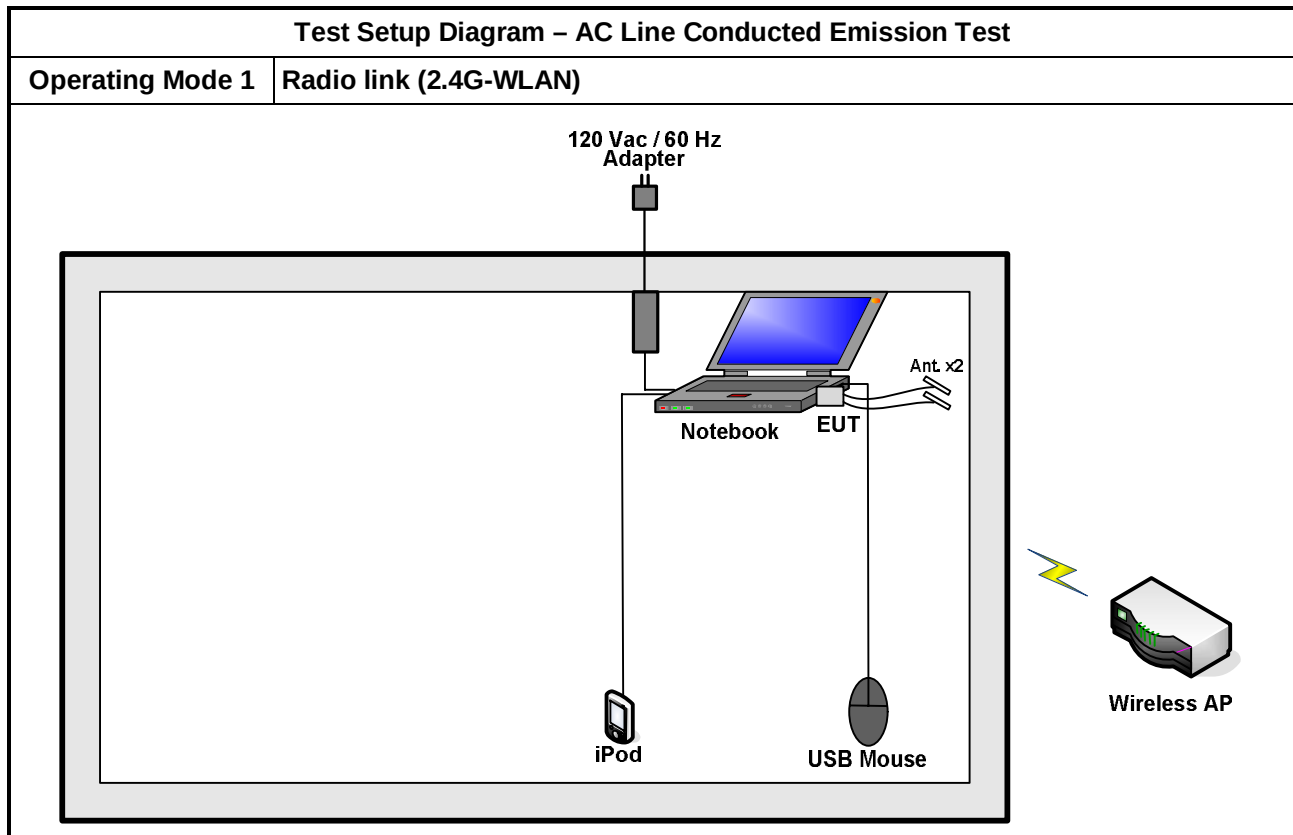


Test Setup Diagram - Radiated Test (Below 1GHz)

Operating Mode	Radio link (2.4G-WLAN)
-----------------------	-------------------------------

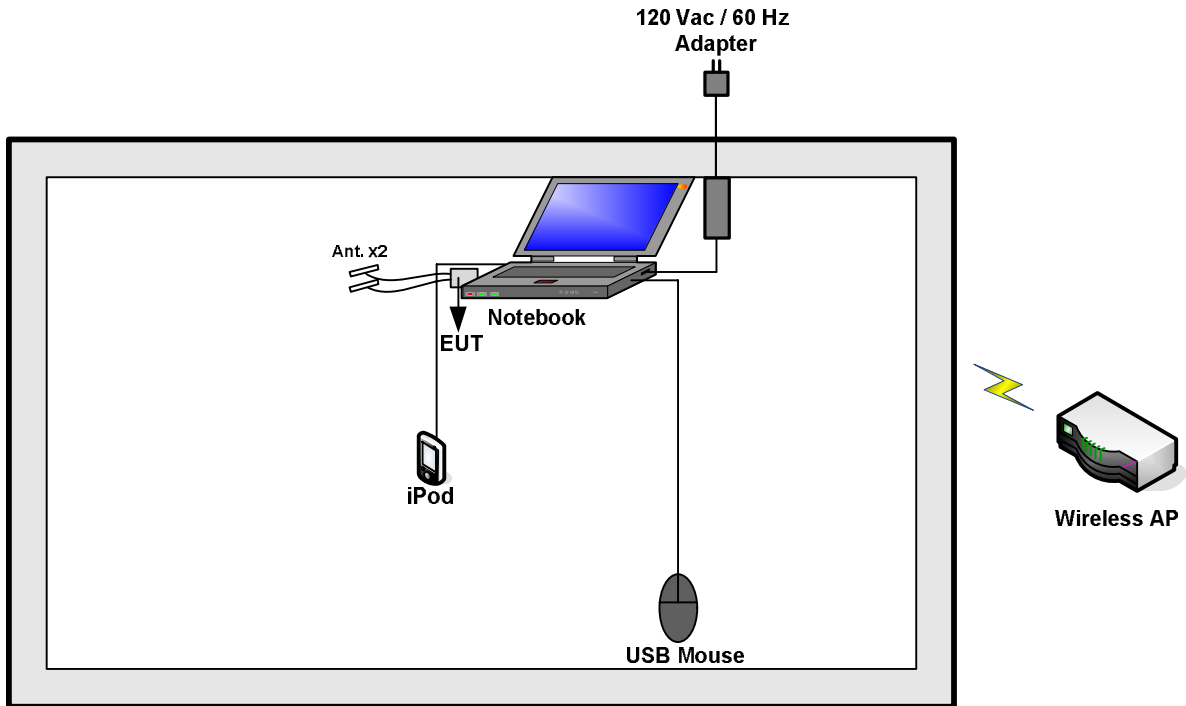
Test Setup Diagram - Radiated Test (Above 1GHz)

Operating Mode	Transmission Mode
-----------------------	--------------------------

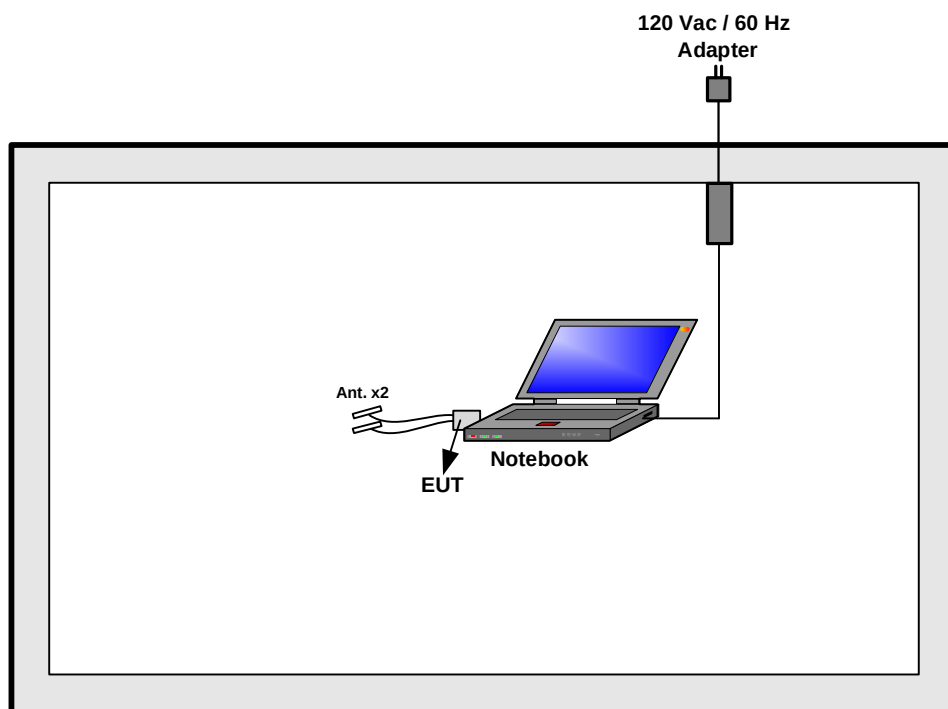

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

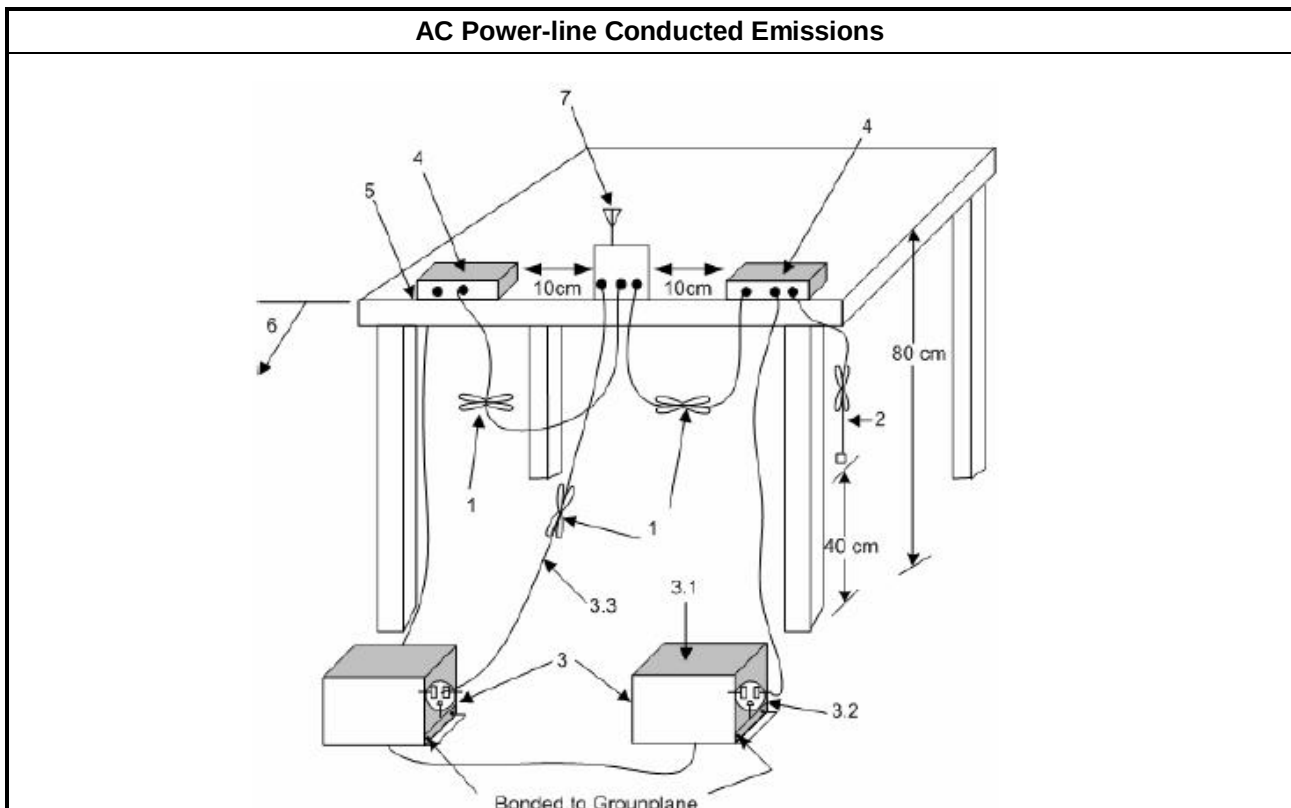


3.1.5 Test Result of AC Power-line Conducted Emissions

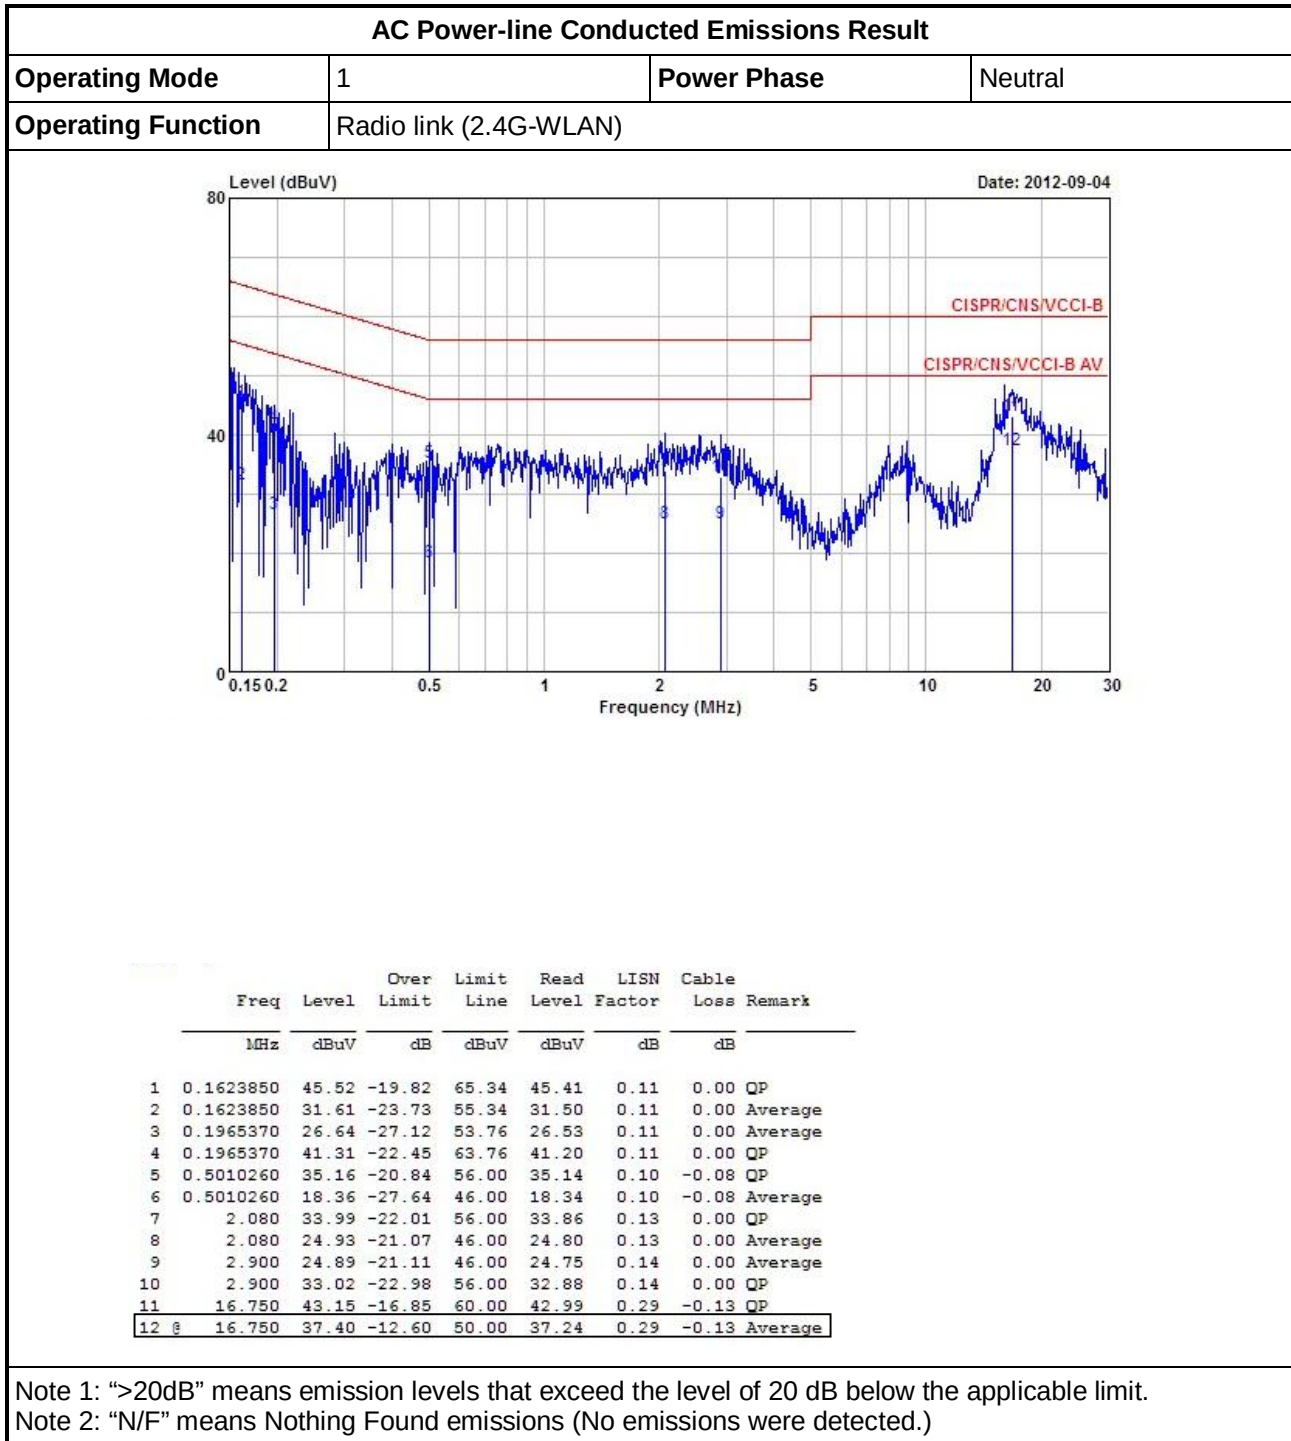

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Radio link (2.4G-WLAN)		

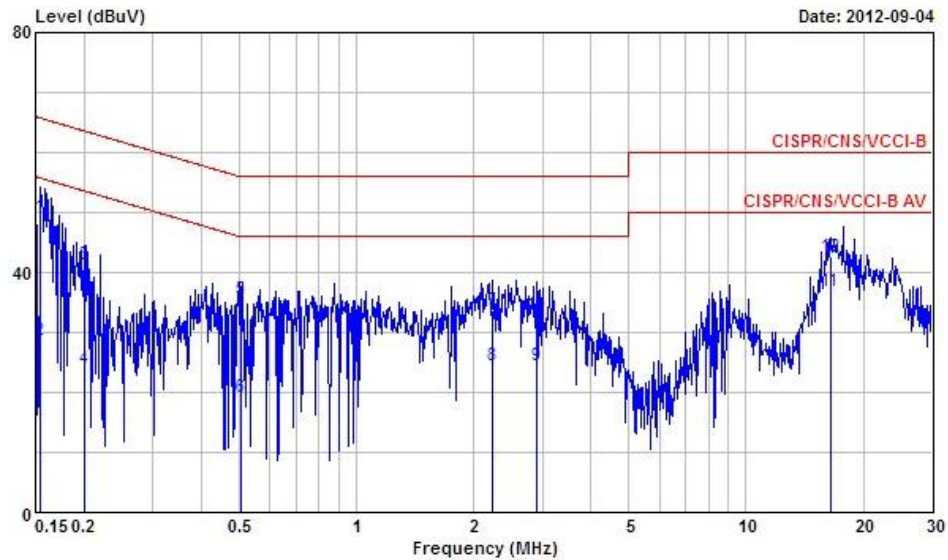

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1548450	49.23	-16.51	65.74	48.99	0.24	0.00	QP
2	0.1548450	28.60	-27.14	55.74	28.36	0.24	0.00	Average
3	0.1996860	41.24	-22.38	63.62	41.01	0.23	0.00	QP
4	0.1996860	23.98	-29.64	53.62	23.75	0.23	0.00	Average
5	0.5048690	35.42	-20.58	56.00	35.28	0.22	-0.08	QP
6	0.5048690	19.33	-26.67	46.00	19.19	0.22	-0.08	Average
7	2.240	33.64	-22.36	56.00	33.38	0.26	0.00	QP
8	2.240	24.52	-21.48	46.00	24.26	0.26	0.00	Average
9	2.900	24.57	-21.43	46.00	24.30	0.27	0.00	Average
10	2.900	32.81	-23.19	56.00	32.54	0.27	0.00	QP
11	16.490	36.82	-13.18	50.00	36.44	0.52	-0.14	Average
12	16.490	42.59	-17.41	60.00	42.21	0.52	-0.14	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
☒	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 5.1.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 5.1.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
☒	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

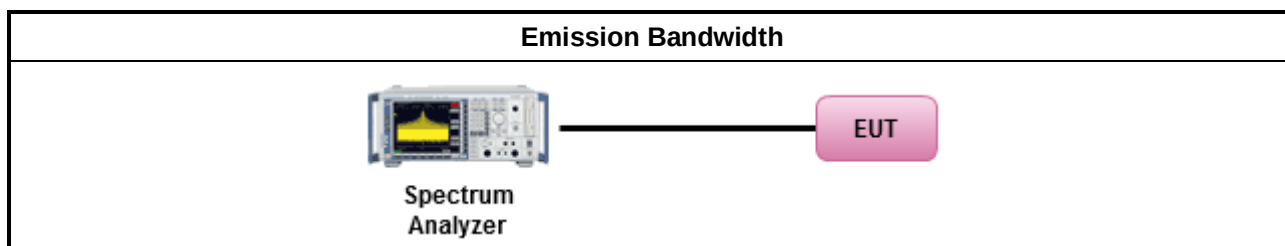


3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	-	-	Chain-Port 1	Chain-Port 2	-	-
11B-20M	1	2412	10.20	-	-	-	8.19	-	-	-
11B-20M	1	2437	10.15	-	-	-	8.20	-	-	-
11B-20M	1	2462	10.14	-	-	-	8.18	-	-	-
11G-20M	1	2412	16.42	-	-	-	14.96	-	-	-
11G-20M	1	2437	16.33	-	-	-	15.58	-	-	-
11G-20M	1	2462	16.29	-	-	-	15.78	-	-	-
11N2.4G-20M	1	2412	17.47	-	-	-	16.90	-	-	-
11N2.4G-20M	1	2437	17.48	-	-	-	16.91	-	-	-
11N2.4G-20M	1	2462	17.46	-	-	-	16.99	-	-	-
11N2.4G-40M	1	2412	36.26	-	-	-	35.92	-	-	-
11N2.4G-40M	1	2437	36.62	-	-	-	36.64	-	-	-
11N2.4G-40M	1	2462	36.62	-	-	-	36.16	-	-	-
11N2.4G-20M	2	2412	17.45	17.47	-	-	16.94	17.47	-	-
11N2.4G-20M	2	2437	17.46	17.46	-	-	16.42	15.56	-	-
11N2.4G-20M	2	2462	17.49	17.53	-	-	16.25	17.61	-	-
11N2.4G-40M	2	2412	36.82	36.62	-	-	35.92	36.20	-	-
11N2.4G-40M	2	2437	36.58	36.46	-	-	36.28	36.24	-	-
11N2.4G-40M	2	2462	36.70	36.30	-	-	36.04	35.36	-	-
Limit			N/A				≥500 kHz			
Result			Complied							
Note 1: N _{TX} = Number of Transmit Chains										

N_{TX} 1


Worst Emission Bandwidth Plots

11B-20M – F2 [Port 1]

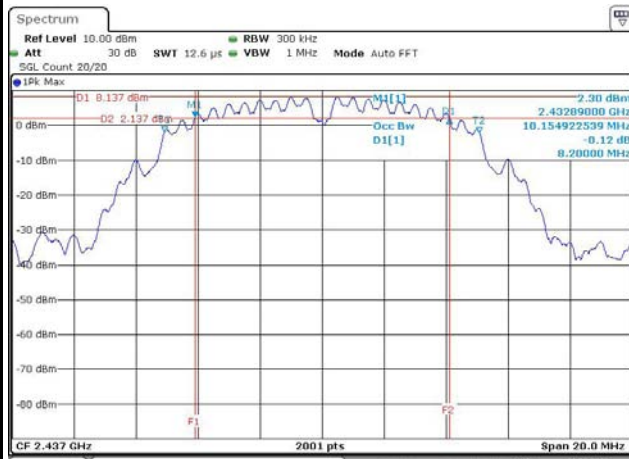


Date: 21.SEP.2012 05:01:22

11G-20M – F3 [Port 1]

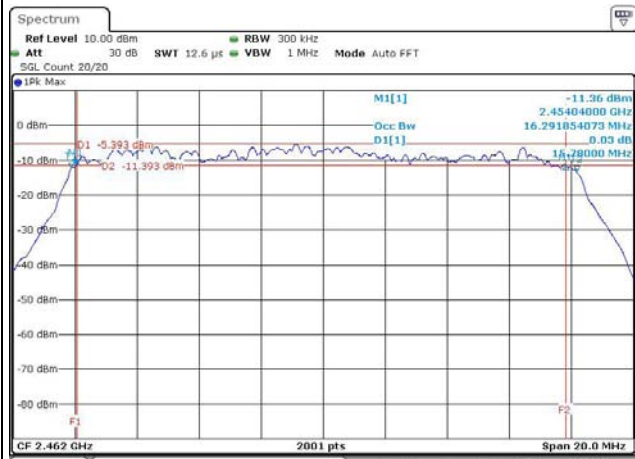


Date: 21.SEP.2012 05:16:39

11N2.4G-20M – F3 [Port 1]

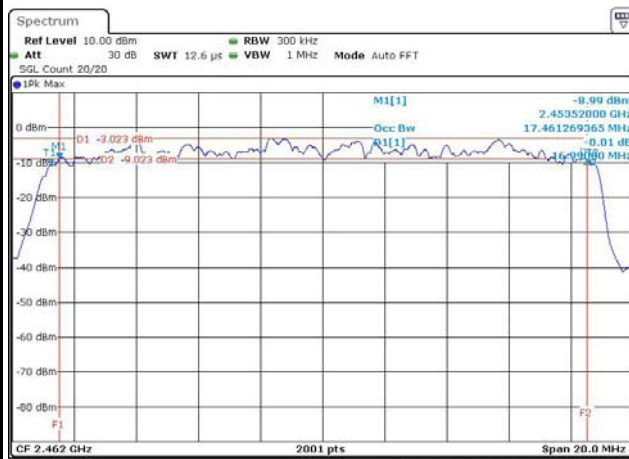

Date: 4.OCT.2012 02:55:26

11N2.4G-40M – F2 [Port 1]

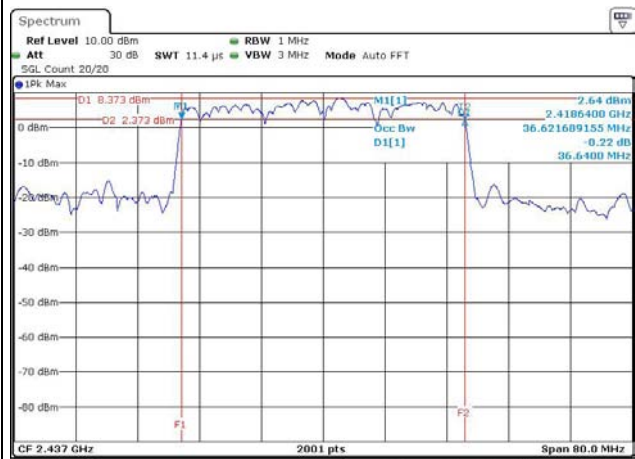


Date: 4.OCT.2012 03:03:01

N_{TX} 2


Worst Emission Bandwidth Plots

11N2.4G-20M – F1 [Port 1]

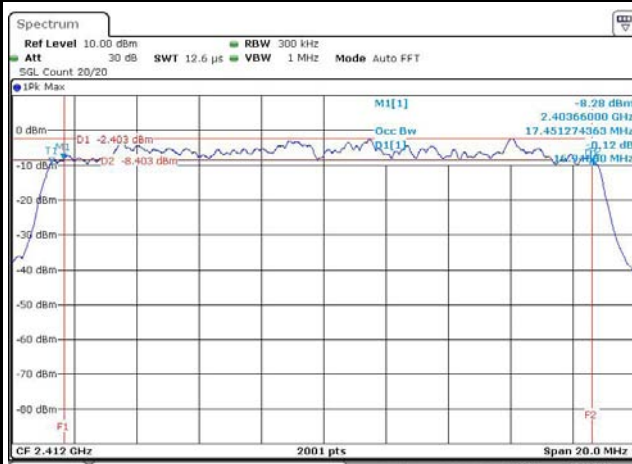


Date: 18.OCT.2012 23:08:05

11N2.4G-20M – F3 [Port 2]

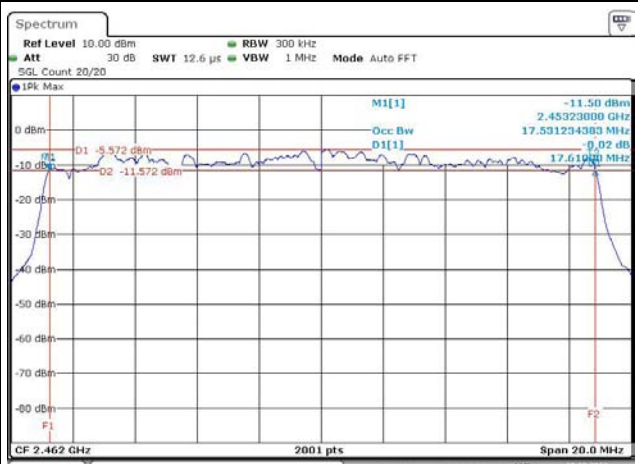


Date: 18.OCT.2012 23:11:47

11N2.4G-40M – F5 [Port 1]

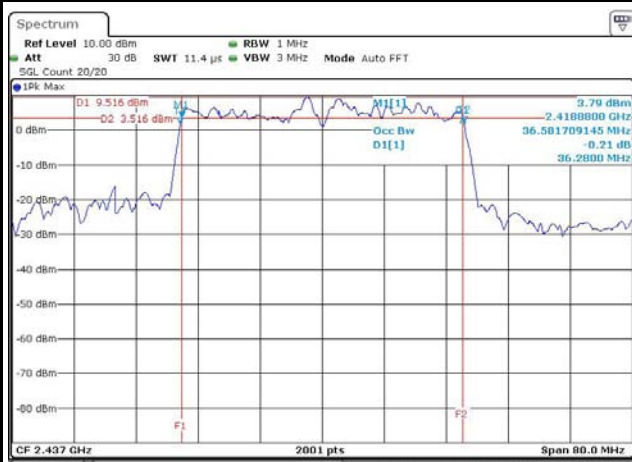

Date: 18.OCT.2012 23:16:50

11N2.4G-40M – F5 [Port 2]

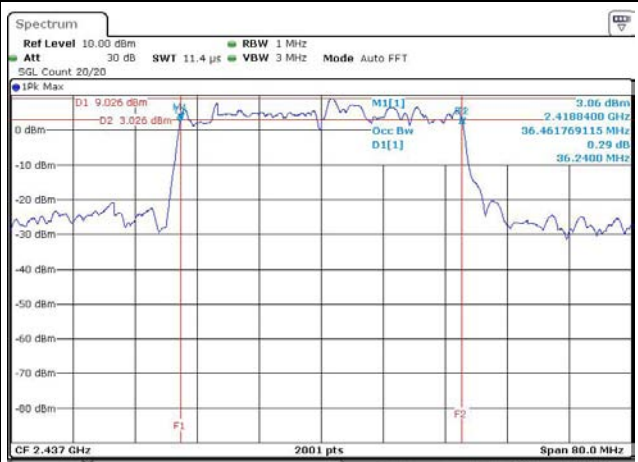

Date: 18.OCT.2012 23:16:57

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
☒ 2400-2483.5 MHz Band:	
☒	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
☒	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
☐	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Smart antenna system (SAS):
☐	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
☒ 2400-2483.5 MHz Band	
☒	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
☐	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
☐	Smart antenna system (SAS)
☐	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
☐	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
☐	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Maximum Peak Conducted Output Power
☐	Refer as FCC KDB 558074, clause 5.2.1.1 Option 1 (RBW ≥ EBW method).
☒	Refer as FCC KDB 558074, clause 5.2.1.2 Option 2 (integrated band power method).
☐	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
☒	Maximum Conducted (Average) Output Power
☐	Refer as FCC KDB 558074, clause 5.2.2.1 Option 1 (RMS detection with slow sweep speed).
☒	Refer as FCC KDB 558074, clause 5.2.2.2 Option 2 (spectral trace averaging).
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☒	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.3.4 Test Setup

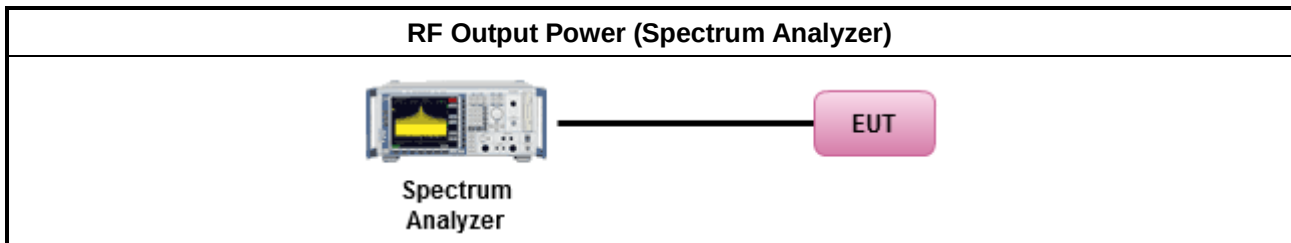

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G_{ANT} (dBi)		5.72	5.72	-	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
Legacy CCK,1-11Mbps (11b)	5.72	1	1	-	-
Non HT20,6-54Mbps (11g)	5.72	1	1	-	-
HT20,M0-M7	5.72	1	1	-	-
HT20,M8-15	5.72	2	2	-	-
HT40,M0-M7	5.72	1	1	-	-
HT40,M8-M15	5.72	2	2	-	-
Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N_{TX})$ All transmit signals are completely uncorrelated, Directional Gain = G_{ANT} Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G_{1/20}} + \dots + 10^{G_{N/20}})^2 / N_{TX}]$ All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G_{1/10}} + \dots + 10^{G_{N/10}}) / N_{TX}]$ Note 3: For Spatial Multiplexing, Directional Gain (DG) = $G_{ANT} + 10 \log(N_{TX}/N_{SS})$, where N_{SS} = the number of independent spatial streams data. Note 4: For CDD transmissions, directional gain is calculated as power measurements: Directional Gain (DG) = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows: Array Gain = 0 dB (i.e., no array gain) for $N_{TX} \leq 4$; Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX};					

3.3.6 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11B-20M	1	2412	21.19	-	-	-	21.19	30	5.72	26.91	36.0
11B-20M	1	2437	21.01	-	-	-	21.01	30	5.72	26.73	36.0
11B-20M	1	2462	18.45	-	-	-	18.45	30	5.72	24.17	36.0
11G-20M	1	2412	16.04	-	-	-	16.04	30	5.72	21.76	36.0
11G-20M	1	2437	25.01	-	-	-	25.01	30	5.72	30.73	36.0
11G-20M	1	2462	14.10	-	-	-	14.10	30	5.72	19.82	36.0
11N2.4G-20M	1	2412	17.25	-	-	-	17.25	30	5.72	22.97	36.0
11N2.4G-20M	1	2437	24.75	-	-	-	24.75	30	5.72	30.47	36.0
11N2.4G-20M	1	2462	15.86	-	-	-	15.86	30	5.72	21.58	36.0
11N2.4G-40M	1	2422	16.35	-	-	-	16.35	30	5.72	22.07	36.0
11N2.4G-40M	1	2437	25.96	-	-	-	25.96	30	5.72	31.68	36.0
11N2.4G-40M	1	2452	15.22	-	-	-	15.22	30	5.72	20.94	36.0
11N2.4G-20M	2	2412	18.38	17.84	-	-	21.13	30	5.72	26.85	36.0
11N2.4G-20M	2	2437	26.19	25.76	-	-	28.99	30	5.72	34.71	36.0
11N2.4G-20M	2	2462	16.70	16.36	-	-	19.54	30	5.72	25.26	36.0
11N2.4G-40M	2	2422	18.26	18.27	-	-	21.28	30	5.72	27.00	36.0
11N2.4G-40M	2	2437	26.92	26.78	-	-	29.86	30	5.72	35.58	36.0
11N2.4G-40M	2	2452	18.22	18.54	-	-	21.39	30	5.72	27.11	36.0
Result			Complied								

3.3.7 Test Result of Maximum Conducted (Average) Output Power


Maximum Conducted (Average) Output Power											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11B-20M	1	2412	17.97	-	-	-	17.97	30	5.72	23.69	36.0
11B-20M	1	2437	17.95	-	-	-	17.95	30	5.72	23.67	36.0
11B-20M	1	2462	16.75	-	-	-	16.75	30	5.72	22.47	36.0
11G-20M	1	2412	8.24	-	-	-	8.24	30	5.72	13.96	36.0
11G-20M	1	2437	17.18	-	-	-	17.18	30	5.72	22.90	36.0
11G-20M	1	2462	6.30	-	-	-	6.30	30	5.72	12.02	36.0
11N2.4G-20M	1	2412	10.13	-	-	-	10.13	30	5.72	15.85	36.0
11N2.4G-20M	1	2437	17.63	-	-	-	17.63	30	5.72	23.35	36.0
11N2.4G-20M	1	2462	8.61	-	-	-	8.61	30	5.72	14.33	36.0
11N2.4G-40M	1	2422	8.00	-	-	-	8.00	30	5.72	13.72	36.0
11N2.4G-40M	1	2437	17.63	-	-	-	17.63	30	5.72	23.35	36.0
11N2.4G-40M	1	2452	6.95	-	-	-	6.95	30	5.72	12.67	36.0
11N2.4G-20M	2	2412	10.68	9.84	-	-	13.29	30	5.72	19.01	36.0
11N2.4G-20M	2	2437	18.62	17.65	-	-	21.17	30	5.72	26.89	36.0
11N2.4G-20M	2	2462	9.09	8.41	-	-	11.77	30	5.72	17.49	36.0
11N2.4G-40M	2	2422	10.20	9.85	-	-	13.04	30	5.72	18.76	36.0
11N2.4G-40M	2	2437	18.88	18.42	-	-	21.67	30	5.72	27.39	36.0
11N2.4G-40M	2	2452	10.13	10.14	-	-	13.15	30	5.72	18.87	36.0
Result			Complied								

Test Signal Duty Cycle (x)		Power Duty Factor [dB] – (10 log 1/x)
☒	93.55% - IEEE 802.11b	0.29
☒	68.07% - IEEE 802.11g	1.67
☒	67.16% - IEEE 802.11n (HT20)	1.73
☒	65.45% - IEEE 802.11n (HT40)	1.84


N_{TX} 1

Worst Maximum Peak Conducted Output Power and Maximum Conducted Output Power Plots


11B-20M – F1 [Port 1]

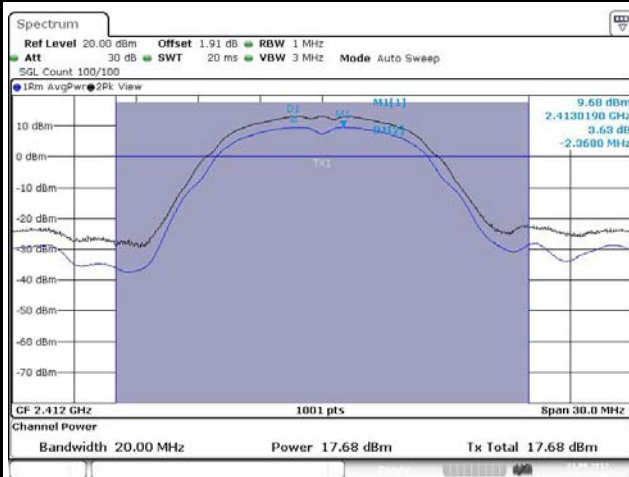


11G-20M – F2 [Port 1]

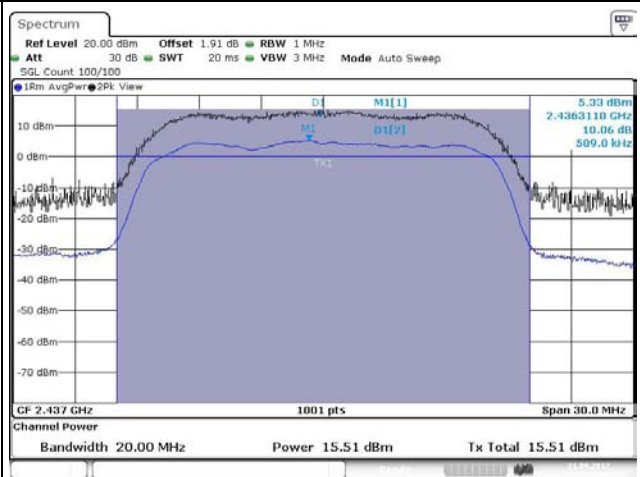

11N2.4G-20M – F2 [Port 1]

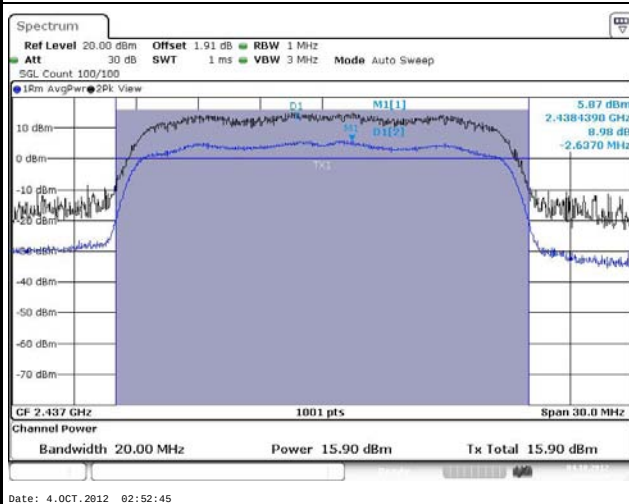


11N2.4G-40M – F2 [Port 1]

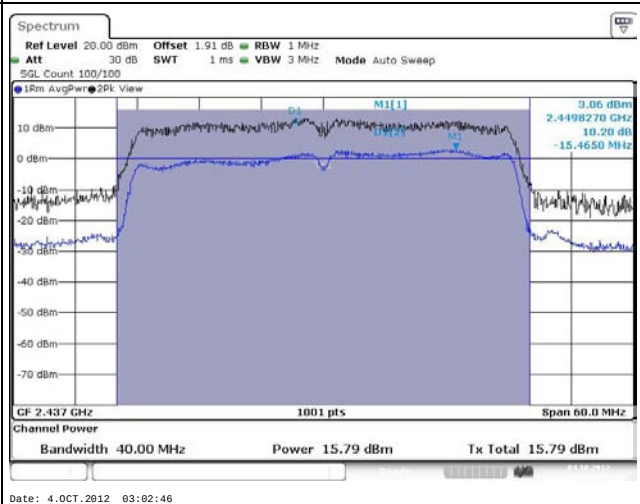

Note 1: Average Output Power Plots w/o Duty Factor

N_{TX} 2

Worst Maximum Peak Conducted Output Power and Maximum Conducted Output Power Plots

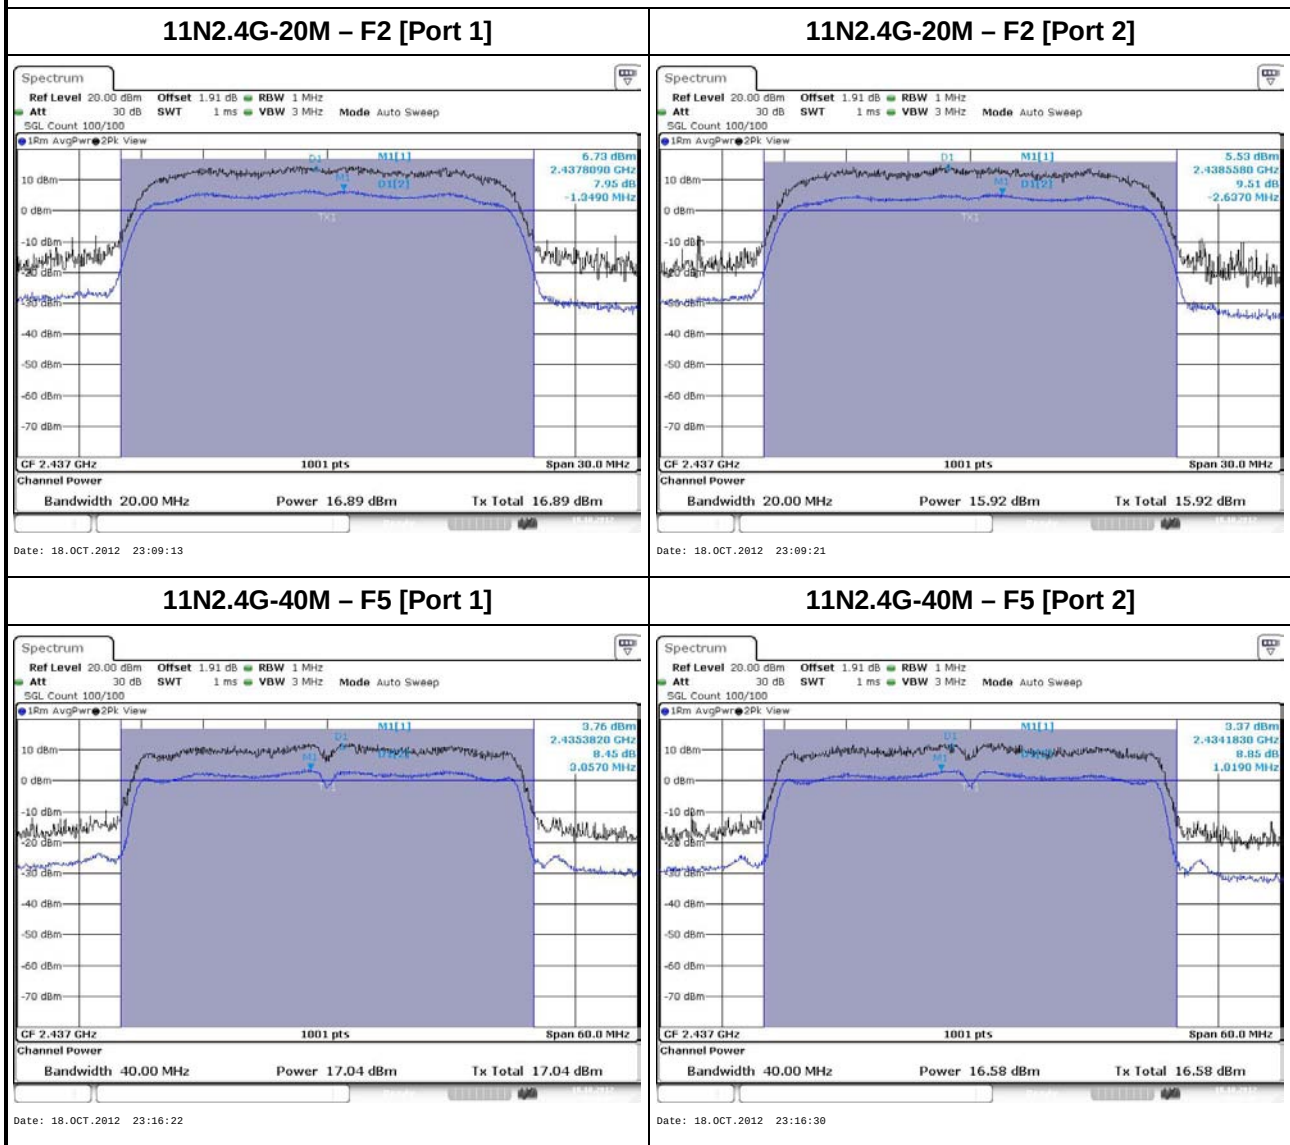

Note 1: Average Output Power Plots w/o Duty Factor

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
☒	Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
☒	Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:
☒	Refer as FCC KDB 558074, clause 5.3.1 Option 1 (peak PSD; BWCF=-15.2dB).
☐	Refer as FCC KDB 558074, clause 5.3.2 Option 2 (average PSD; BWCF=-15.2dB).
☐	Refer as ANSI C63.10, clause 6.11.2.3 for PSD for DTS - (RBW=3kHz; sweep=100s).
☐	Refer as ANSI C63.10, clause 6.11.2.4 for Alternative PSD for DTS - (RBW=3kHz; average=100)
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below:
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. The new data trace samples added 100 kHz segment and found the highest value of each 100 kHz segments. Add the bandwidth correction factor (BWCF) [-15.2 dB] adjusting in power spectral density per 3kHz.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.


3.4.4 Test Setup

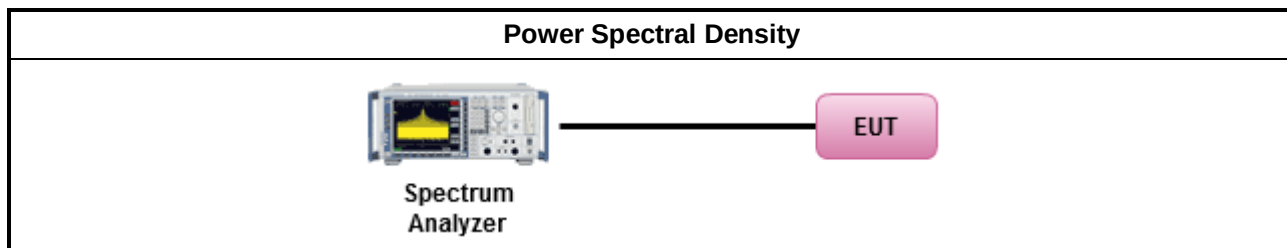

3.4.5 Test Result of Power Spectral Density


Power Spectral Density Result								
Condition			Power Spectral Density (dBm/3kHz)					
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	-	-	-	-	Power Limit
11B-20M	1	2412	-6.15	-	-	-	-	8
11B-20M	1	2437	-6.47	-	-	-	-	8
11B-20M	1	2462	-7.32	-	-	-	-	8
11G-20M	1	2412	-19.46	-	-	-	-	8
11G-20M	1	2437	-9.85	-	-	-	-	8
11G-20M	1	2462	-21.03	-	-	-	-	8
11N2.4G-20M	1	2412	-20.08	-	-	-	-	8
11N2.4G-20M	1	2437	-12.47	-	-	-	-	8
11N2.4G-20M	1	2462	-21.66	-	-	-	-	8
11N2.4G-40M	1	2422	-24.22	-	-	-	-	8
11N2.4G-40M	1	2437	-13.08	-	-	-	-	8
11N2.4G-40M	1	2452	-23.89	-	-	-	-	8
11N2.4G-20M	2	2412	-17.84	-	-	-	-	8
11N2.4G-20M	2	2437	-11.33	-	-	-	-	8
11N2.4G-20M	2	2462	-19.66	-	-	-	-	8
11N2.4G-40M	2	2422	-20.86	-	-	-	-	8
11N2.4G-40M	2	2437	-12.49	-	-	-	-	8
11N2.4G-40M	2	2452	-21.78	-	-	-	-	8
Result			Complied					
Note 1: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]								

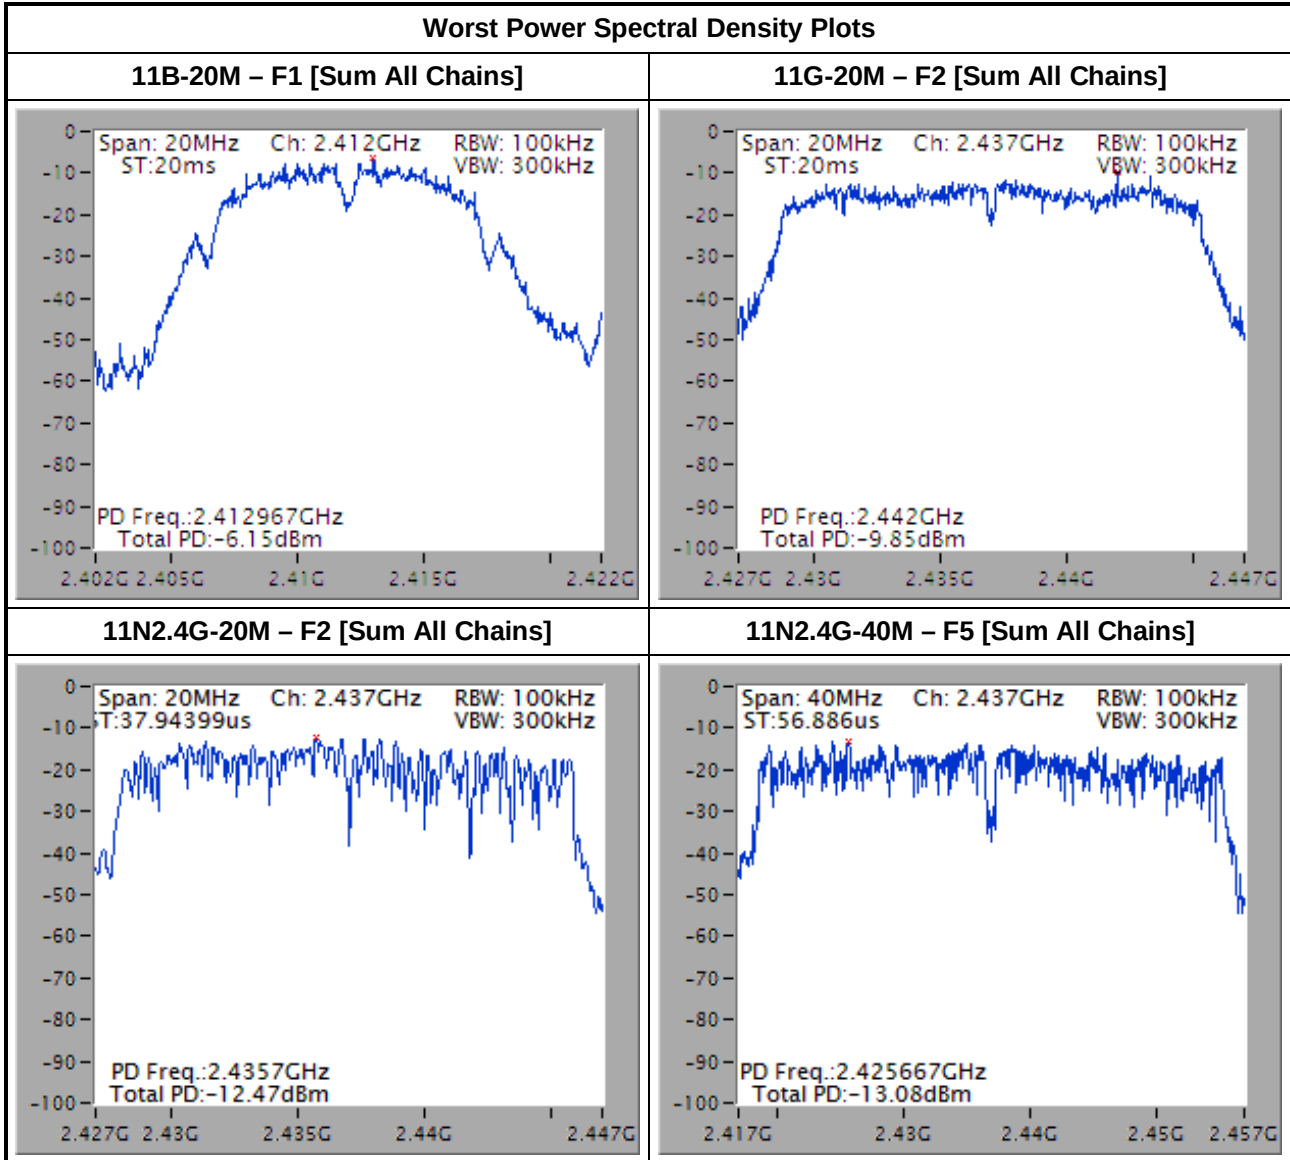N_{TX} 1

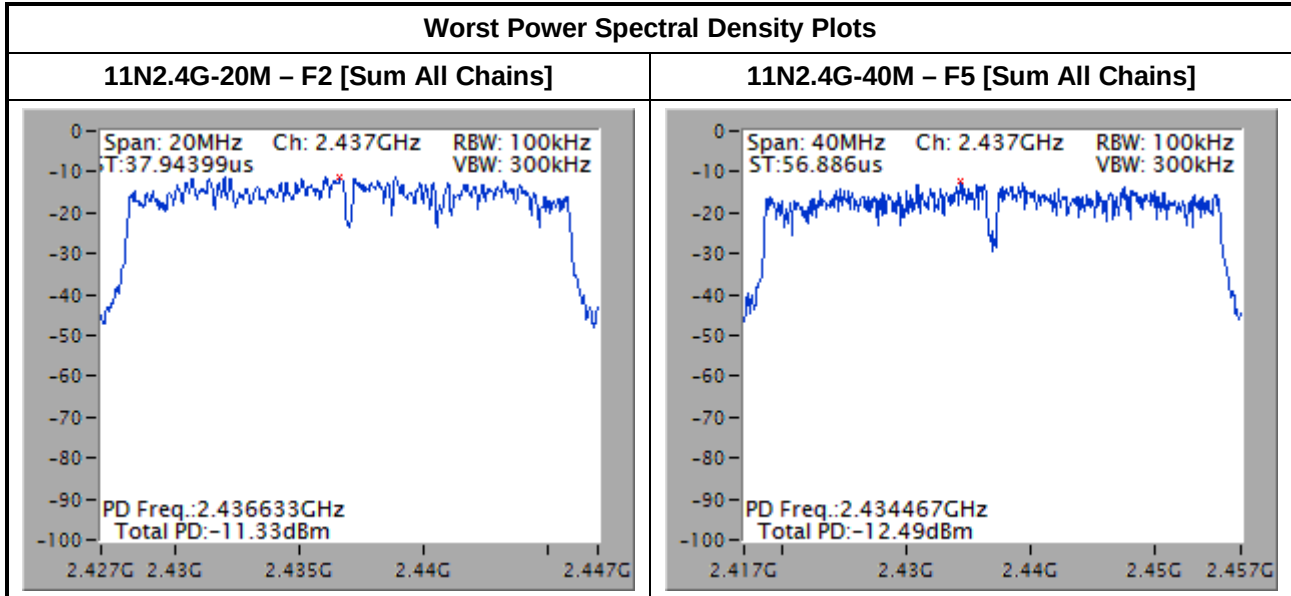
N_{TX} 2


3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

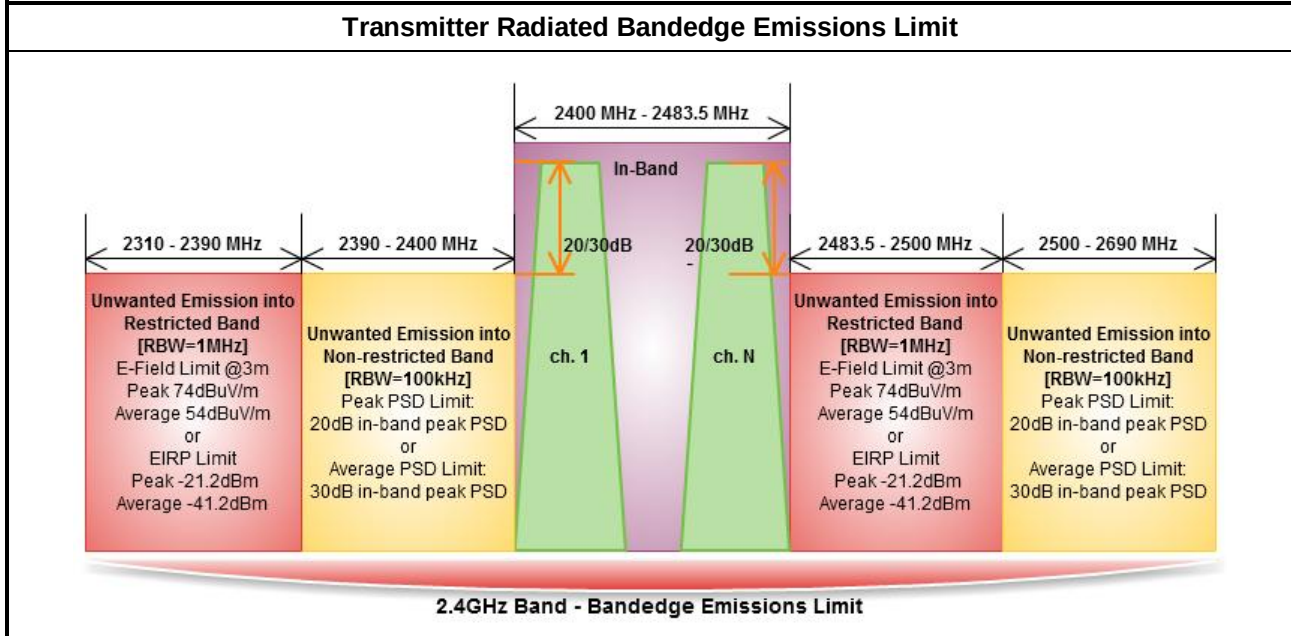


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.



3.5.3 Test Procedures

Test Method	
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 558074, clause 5.4.1 for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 558074, clause 5.4.2 for unwanted emissions into restricted bands.
☒	Refer as FCC KDB 558074, clause 5.4.2.2.1 Option 1 (Power Averaging).
☐	Refer as FCC KDB 558074, clause 5.4.2.2.2 Option 2 (Trace Averaging).
☐	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). – Duty cycle $\geq$ 98%.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 5.4.2.1.1 measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	Refer as FCC KDB 558074, clause 5.4.2.2.4 for narrower resolution bandwidth using the band power and summing the spectral levels (i.e., 100 kHz or 1 MHz).
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.5.4 Test Setup

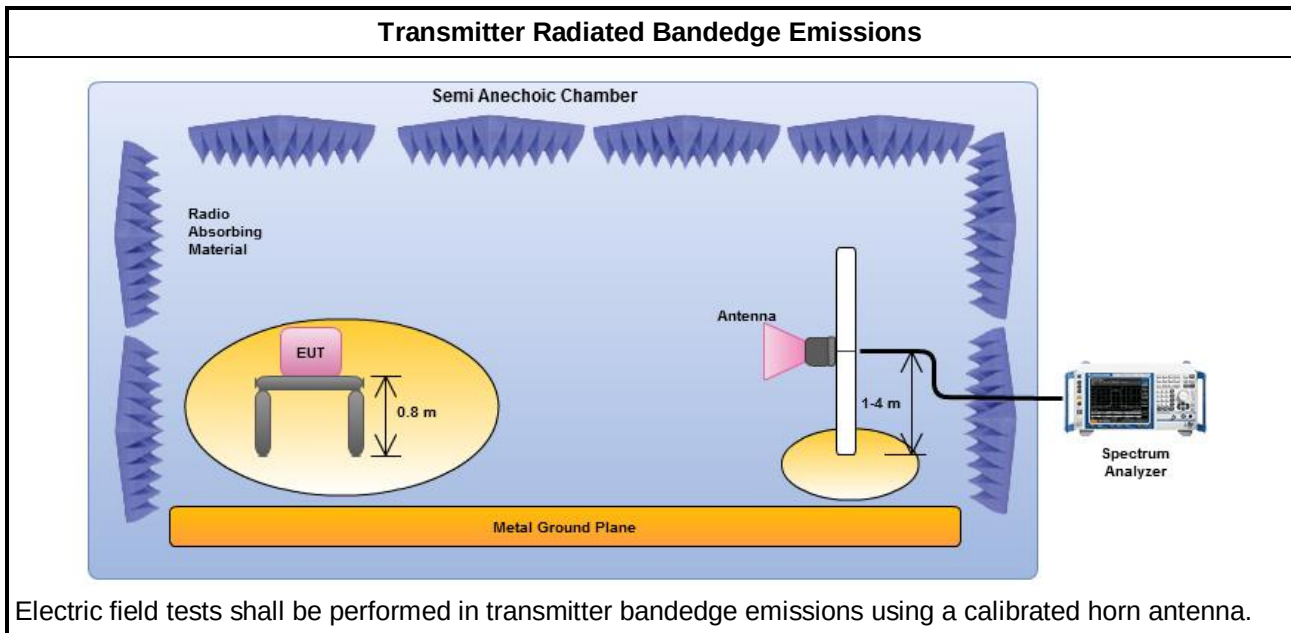



3.5.5 Test Result of Transmitter Radiated Bandedge Emissions-N_{TX} 1

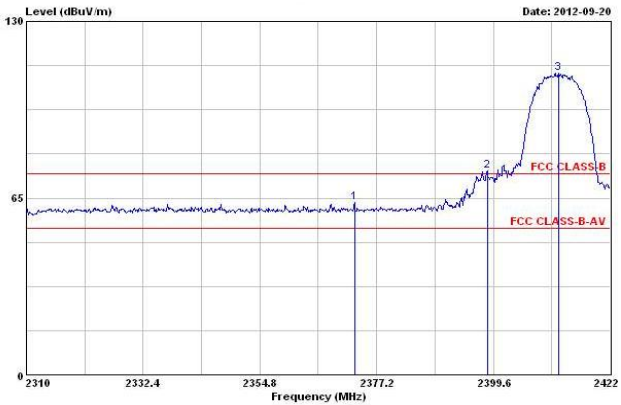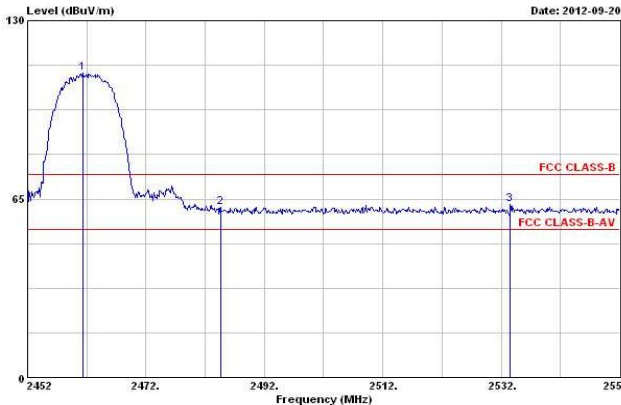Transmitter Radiated Bandedge Emissions Result								
Modulation	11B-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	111.00	2398.48	74.95	36.05	20	PK	V
2500-2690	2462	110.95	2533.50	62.91	48.04	20	PK	V
Low Bandedge				Up Bandedge				
								



Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	11B-20M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	118.61	2390.00	3	68.95	74	PK	V
2310-2390	2412	104.30	2389.63	3	52.51	54	AV	V
2483.5-2500	2462	118.79	2483.80	3	68.46	74	PK	V
2483.5-2500	2462	104.38	2483.50	3	52.81	54	AV	V



Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

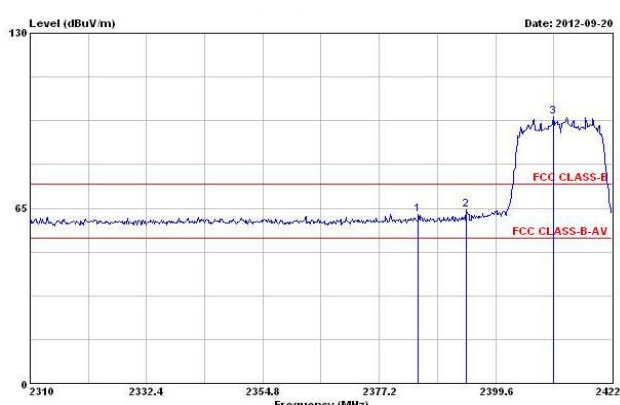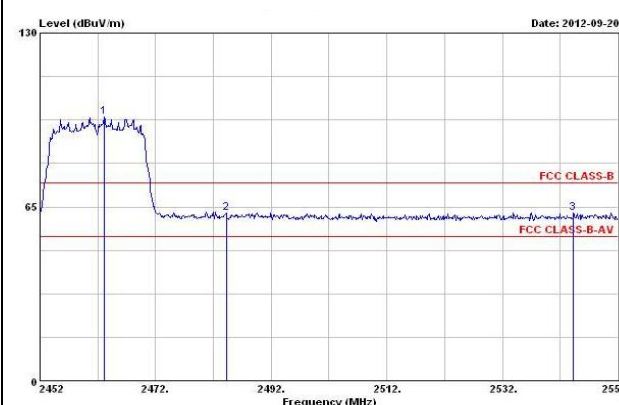Transmitter Radiated Bandedge Emissions Result								
Modulation	11G-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	99.10	2394.00	64.32	34.78	20	PK	V
2500-2690	2462	98.56	2544.30	62.85	35.71	20	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11G-20M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	108.46	2389.97	3	67.23	74	PK	V
2310-2390	2412	96.70	2389.18	3	52.47	54	AV	V
2483.5-2500	2462	107.69	2485.00	3	66.76	74	PK	V
2483.5-2500	2462	95.40	2485.80	3	52.99	54	AV	V
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								

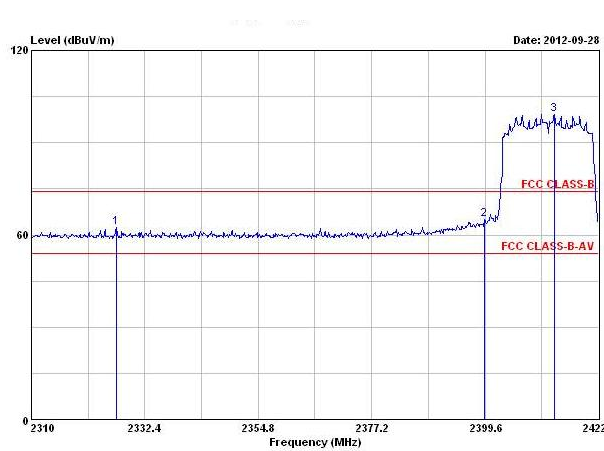
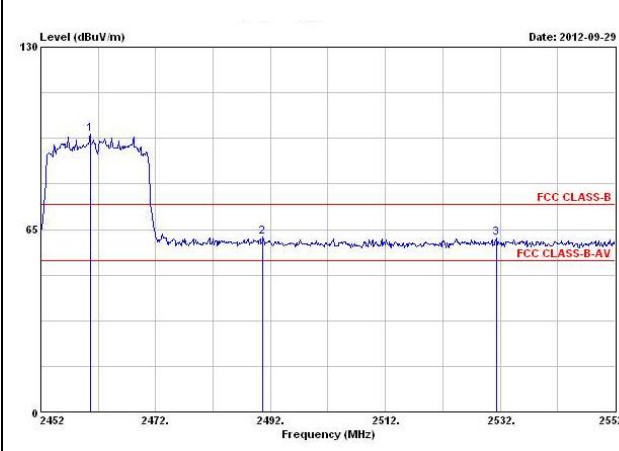
Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	99.33	2399.49	65.05	34.28	20	PK	V
2500-2690	2462	99.16	2531.40	61.90	37.26	20	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	108.05	2389.97	3	71.41	74	PK	V
2310-2390	2412	95.76	2390.00	3	52.97	54	AV	V
2483.5-2500	2462	107.40	2484.70	3	66.34	74	PK	V
2483.5-2500	2462	95.26	2487.10	3	53.00	54	AV	V
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								

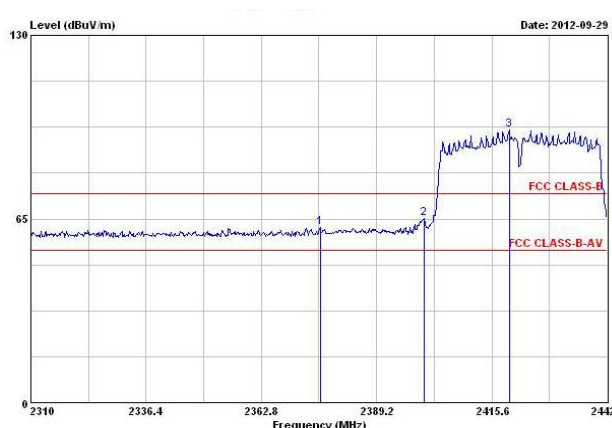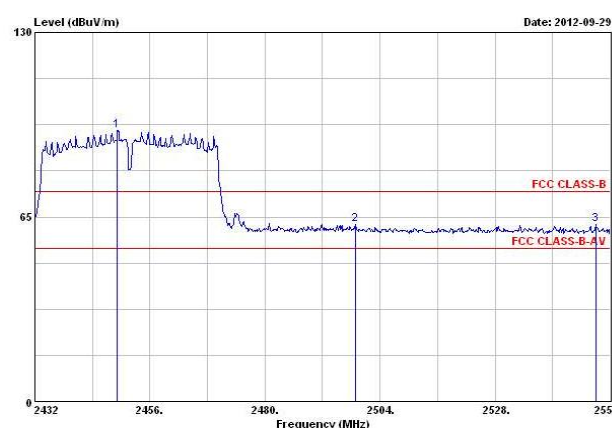Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2422	96.55	2400.00	65.04	31.51	20	PK	V
2500-2690	2452	95.57	2549.00	62.28	33.29	20	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2422	105.58	2378.38	3	69.23	74	PK	V
2310-2390	2422	86.84	2390.00	3	52.58	54	AV	V
2483.5-2500	2452	104.16	2496.08	3	68.34	74	PK	V
2483.5-2500	2452	85.57	2493.68	3	52.53	54	AV	V
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								



3.5.6 Test Result of Transmitter Radiated Bandedge Emissions- N_{TX} 2

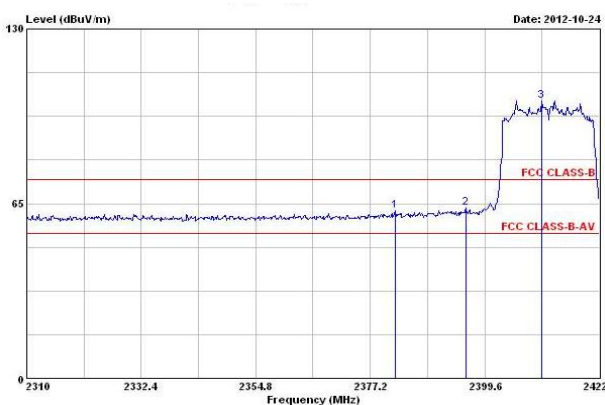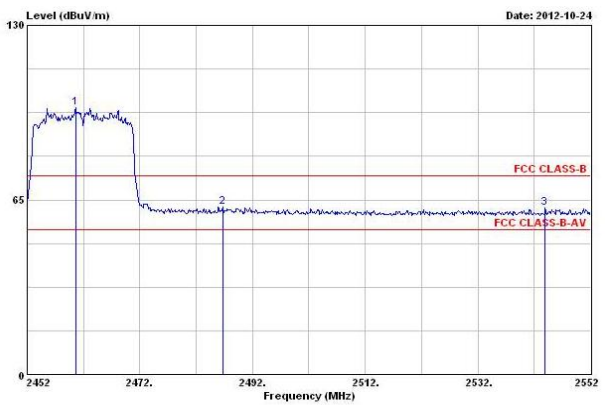Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	103.26	2395.90	63.37	39.89	20	PK	V
2500-2690	2462	99.30	2543.90	62.04	37.26	20	PK	V
Low Bandedge				Up Bandedge				
								

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M-N _{TX} 2		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	111.34	2390.00	3	68.80	74	PK	V
2310-2390	2412	97.02	2390.00	3	52.68	54	AV	V
2483.5-2500	2462	107.33	2487.50	3	65.59	74	PK	V
2483.5-2500	2462	93.86	2487.80	3	52.04	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

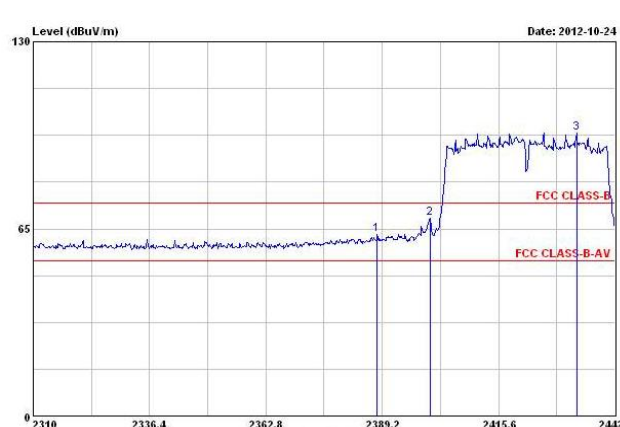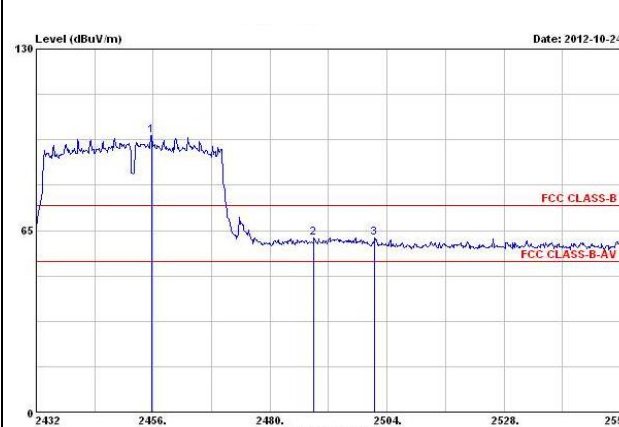Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M-N _{TX} 2		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2422	98.17	2400.00	68.54	29.63	20	PK	V
2500-2690	2452	99.05	2501.48	62.25	36.80	20	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M-N _{TX} 2		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2422	105.64	2389.60	3	69.15	74	PK	V
2310-2390	2422	85.96	2389.60	3	52.92	54	AV	V
2483.5-2500	2452	105.26	2490.44	3	68.52	74	PK	V
2483.5-2500	2452	85.94	2493.80	3	52.93	54	AV	V
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								

3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 558074, clause 5.4.1 for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 558074, clause 5.4.2 for unwanted emissions into restricted bands.
☒	Refer as FCC KDB 558074, clause 5.4.2.2.1 Option 1 (Power Averaging).
☐	Refer as FCC KDB 558074, clause 5.4.2.2.2 Option 2 (Trace Averaging).
☐	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq$ 98%.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 5.4.2.2.1.1 measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.


3.6.4 Test Setup

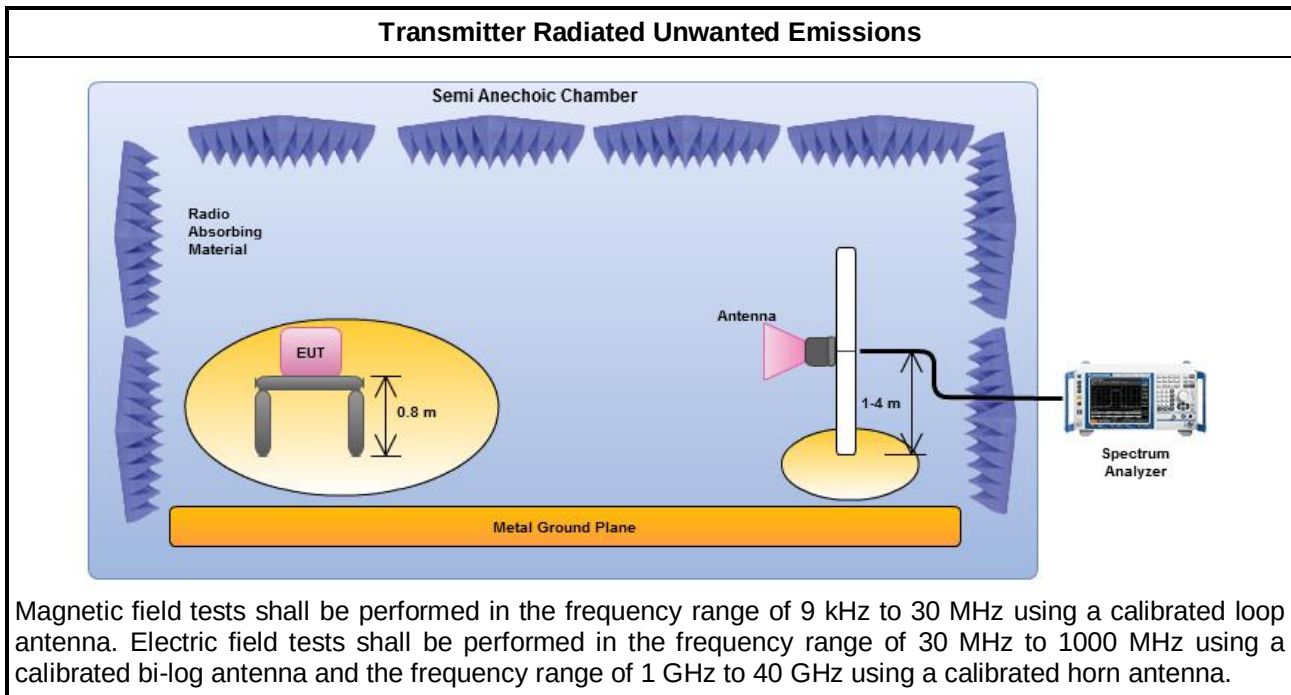

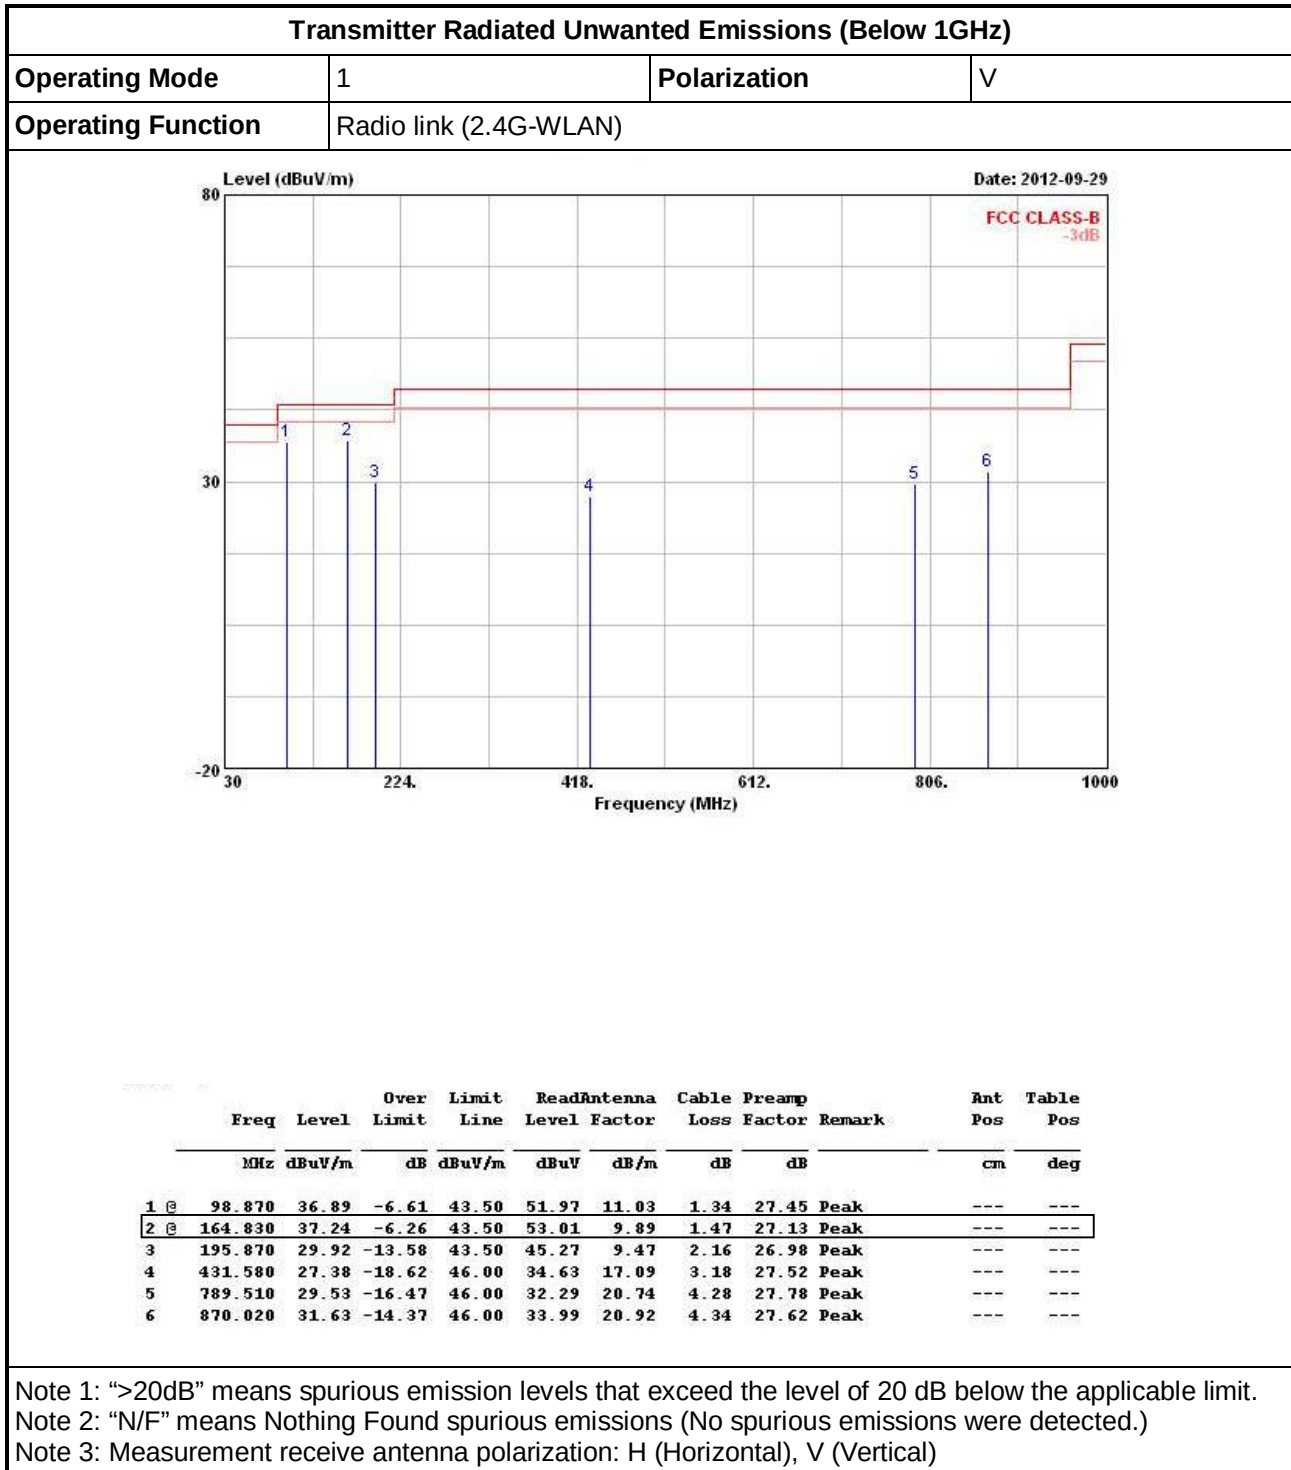3.6.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)


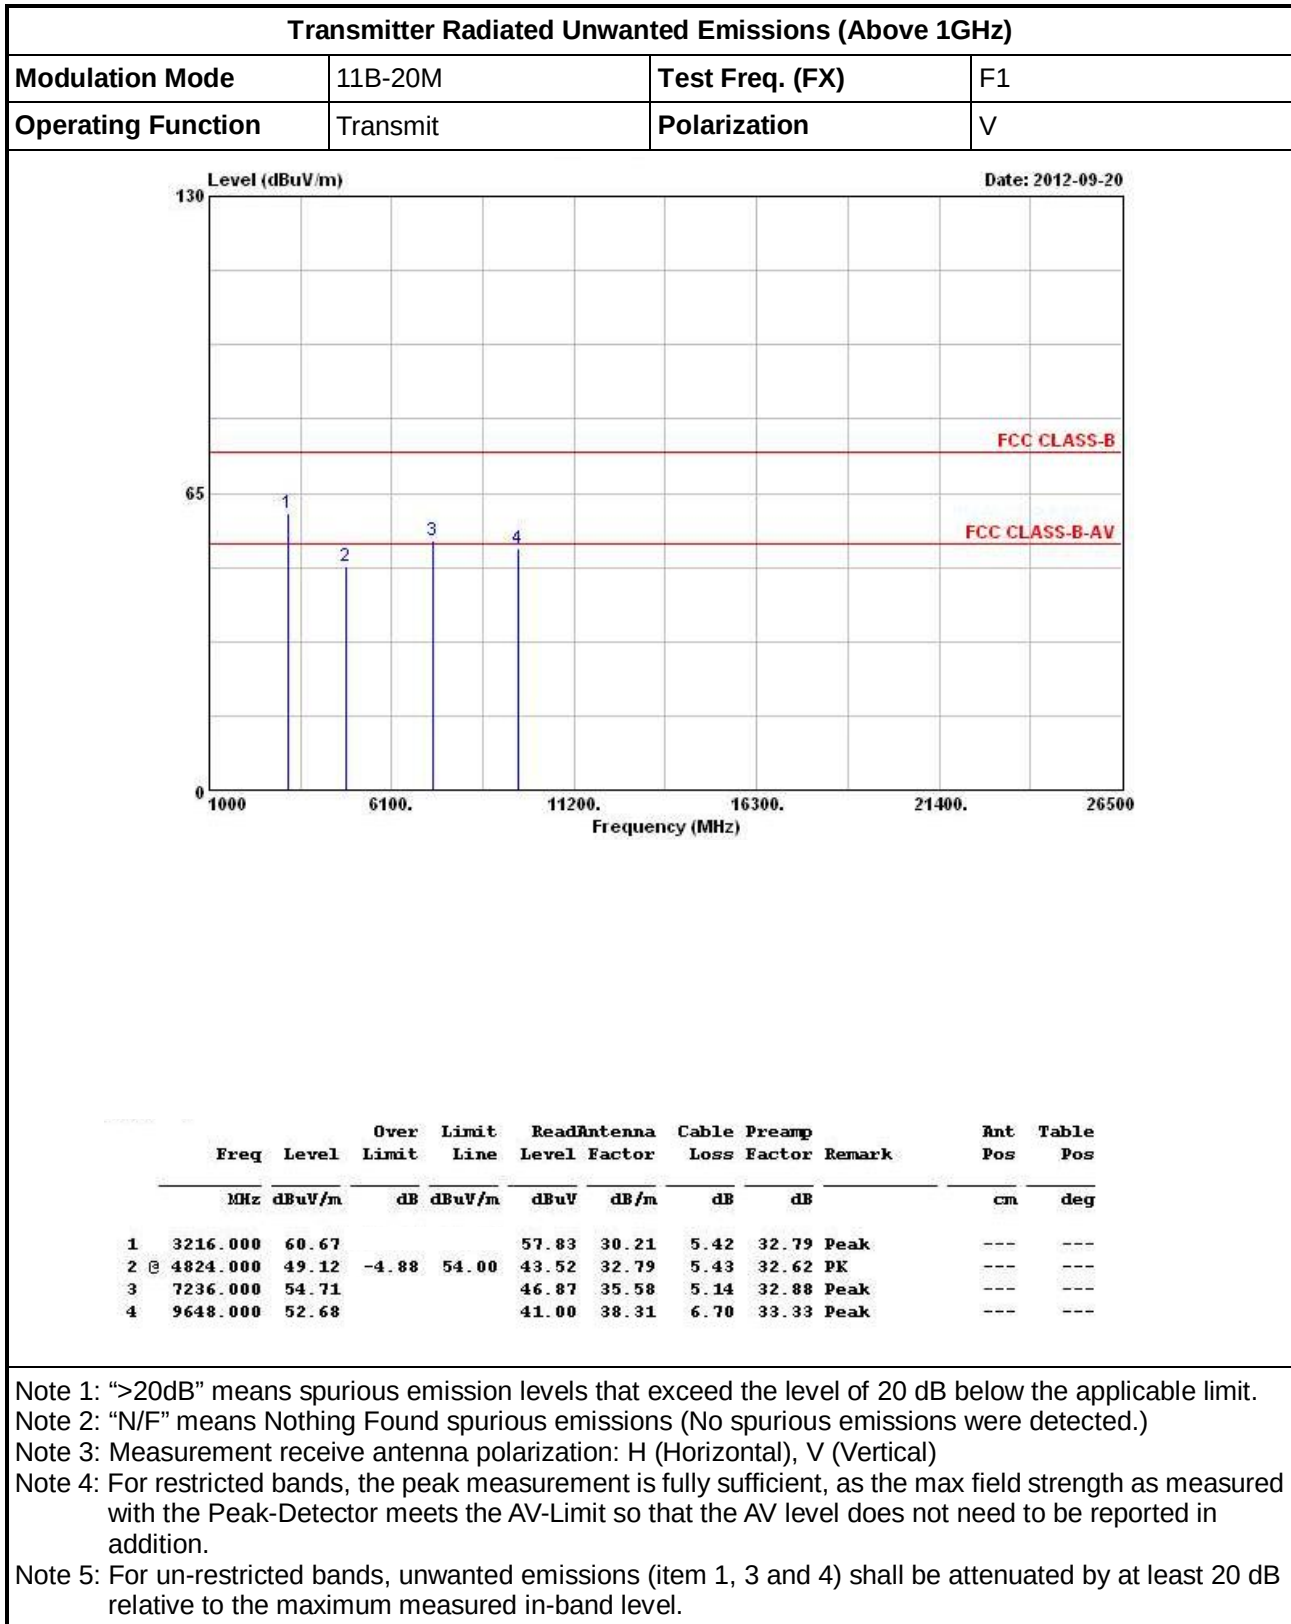
Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	Radio link (2.4G-WLAN)		

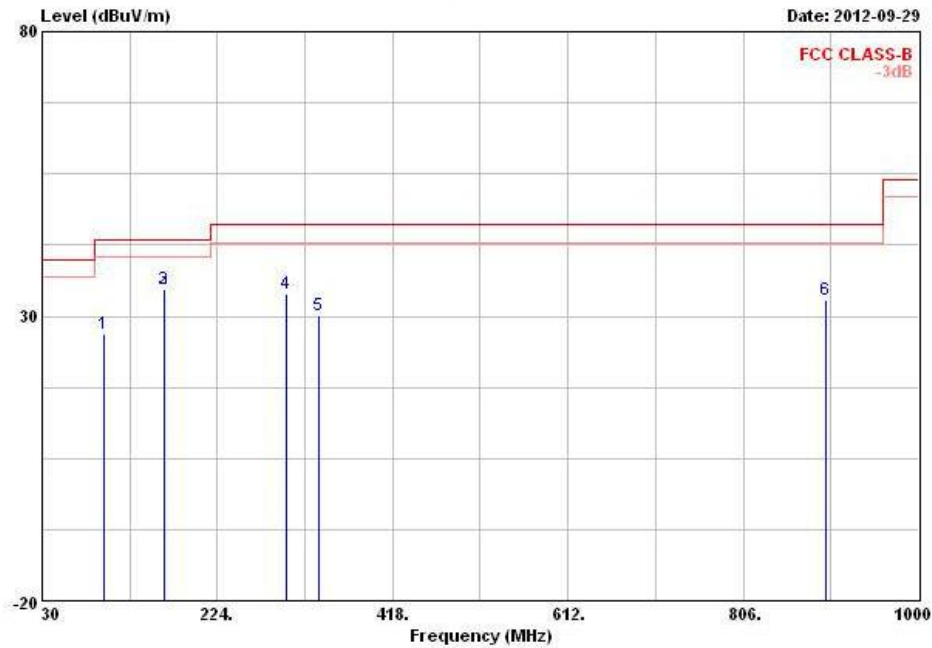


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	98.870	26.80	-16.70	43.50	41.88	11.03	1.34	27.45	Peak	---
2	164.830	34.84	-8.66	43.50	50.61	9.89	1.47	27.13	Peak	---
3	164.830	34.84	-8.66	43.50	50.61	9.89	1.47	27.13	Peak	---
4	299.660	33.93	-12.07	46.00	43.86	13.58	3.19	26.70	Peak	---
5	335.550	30.15	-15.85	46.00	39.90	14.67	2.50	26.92	Peak	---
6	897.180	32.73	-13.27	46.00	35.22	21.02	4.06	27.57	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11B-20M- N_{TX} 1


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

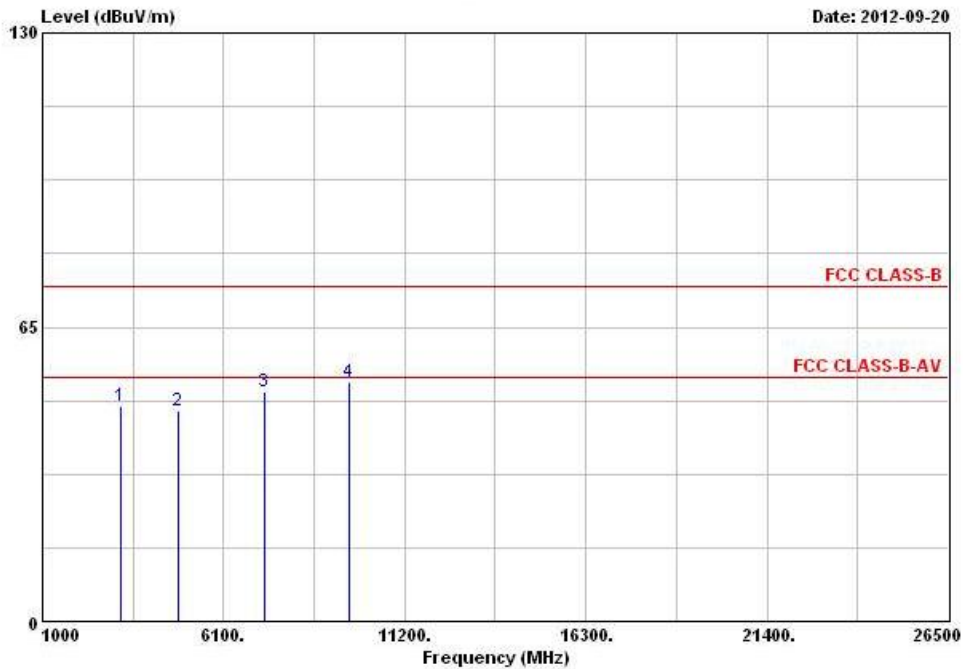

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3216.000	47.67			44.83	30.21	5.42	32.79	Peak	---	---
2	4824.000	46.46	-7.54	54.00	40.86	32.79	5.43	32.62	PK	0	0
3	7236.000	50.72			42.88	35.58	5.14	32.88	Peak	0	0
4	9648.000	52.88			41.20	38.31	6.70	33.33	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

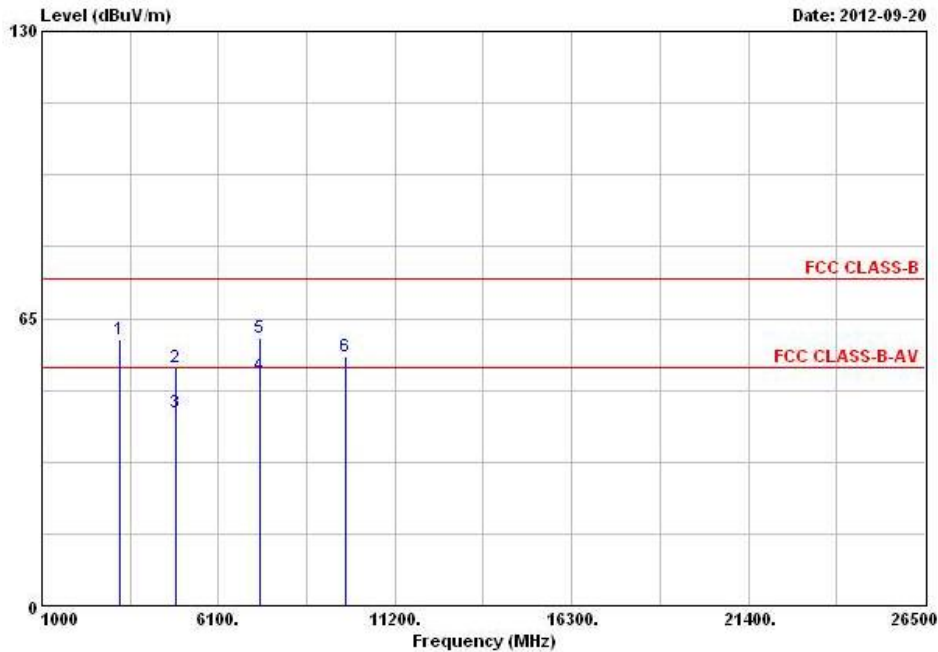

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3249.000	60.27			57.36	30.28	5.42	32.79	Peak	---
2	4874.000	54.02	-19.98	74.00	48.32	32.88	5.43	32.61	Peak	---
3	4874.000	43.71	-10.29	54.00	38.01	32.88	5.43	32.61	Average	---
4	7311.000	52.10	-1.90	54.00	43.89	35.74	5.36	32.89	Average	---
5	7311.000	60.71	-13.29	74.00	52.50	35.74	5.36	32.89	Peak	---
6	9748.000	56.32			44.38	38.52	6.74	33.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

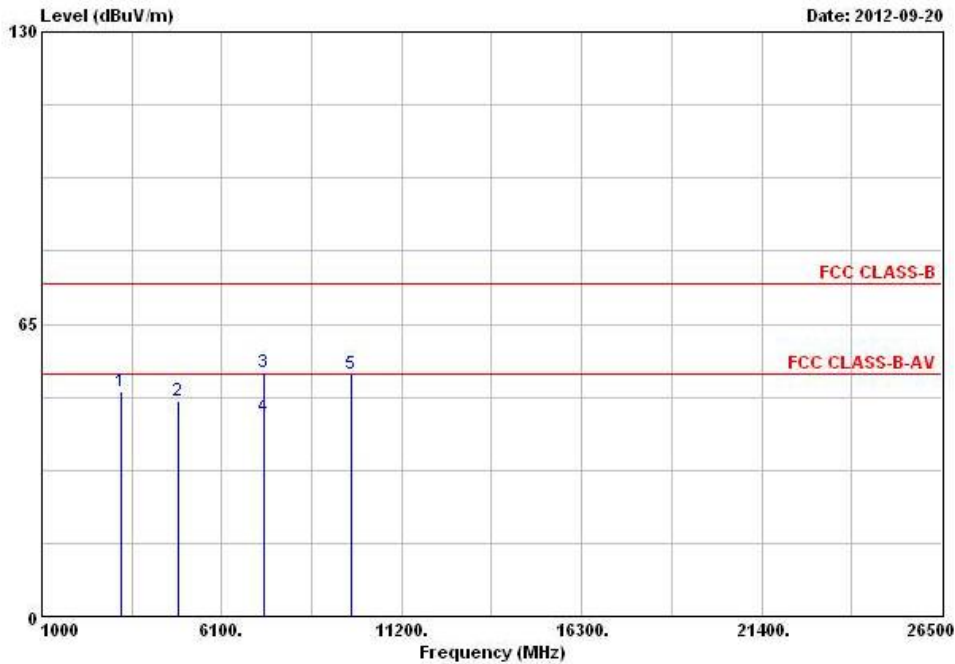

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3249.000	50.06			47.15	30.28	5.42	32.79	Peak	---	---
2 @	4874.000	48.02	-5.98	54.00	42.32	32.88	5.43	32.61	PK	---	---
3	7311.000	54.19	-19.81	74.00	45.98	35.74	5.36	32.89	Peak	---	---
4	7311.000	44.25	-9.75	54.00	36.04	35.74	5.36	32.89	Average	---	---
5	9748.000	53.85			41.91	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

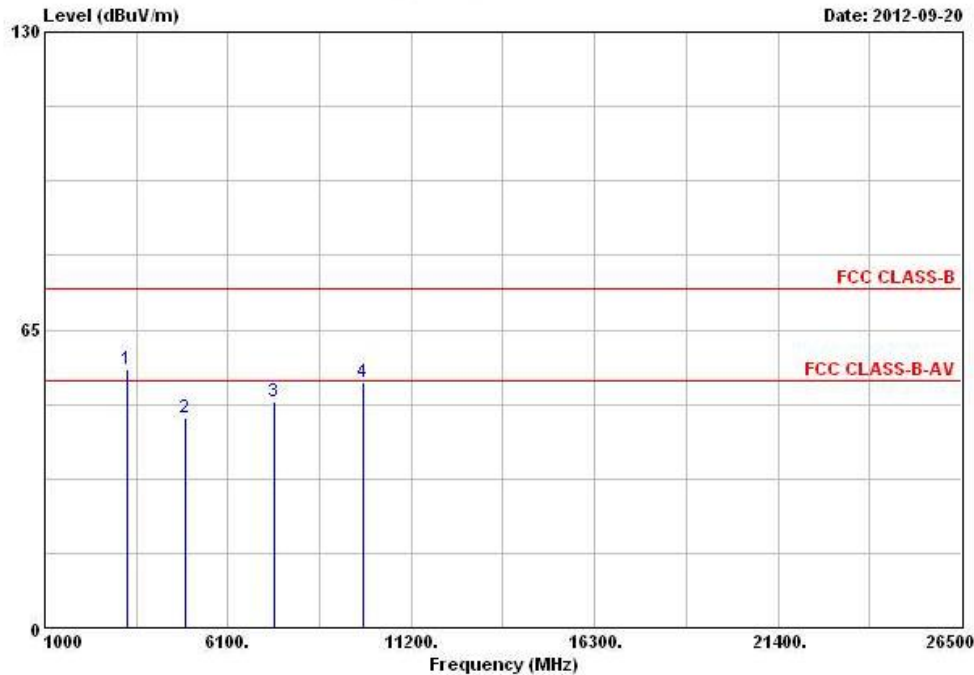

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3282.000	56.40			53.43	30.35	5.41	32.79 Peak	---	---
2	4924.000	45.67	-8.33	54.00	39.88	32.98	5.41	32.60 PK	---	---
3	7386.000	49.42	-4.58	54.00	40.81	35.95	5.57	32.91 Average	---	---
4	9848.000	53.56			41.38	38.69	6.80	33.31 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

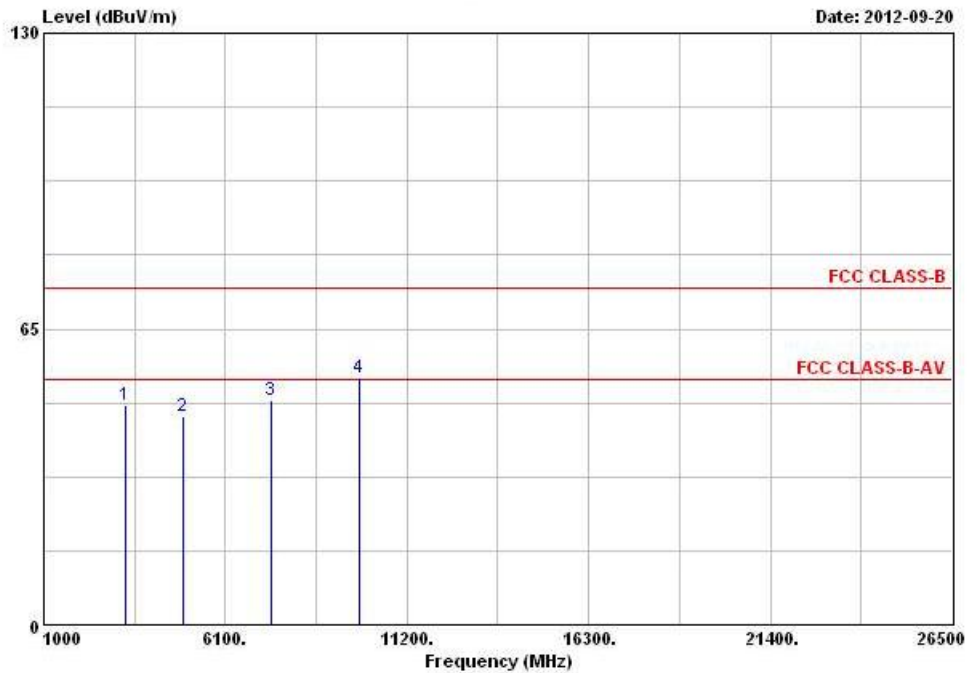

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3282.000	48.11			45.14	30.35	5.41	32.79	Peak	---	---
2	4924.000	45.84	-8.16	54.00	40.05	32.98	5.41	32.60	PK	---	---
3 @	7386.000	49.38	-4.62	54.00	40.77	35.95	5.57	32.91	PK	---	---
4	9848.000	54.24			42.06	38.69	6.80	33.31	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

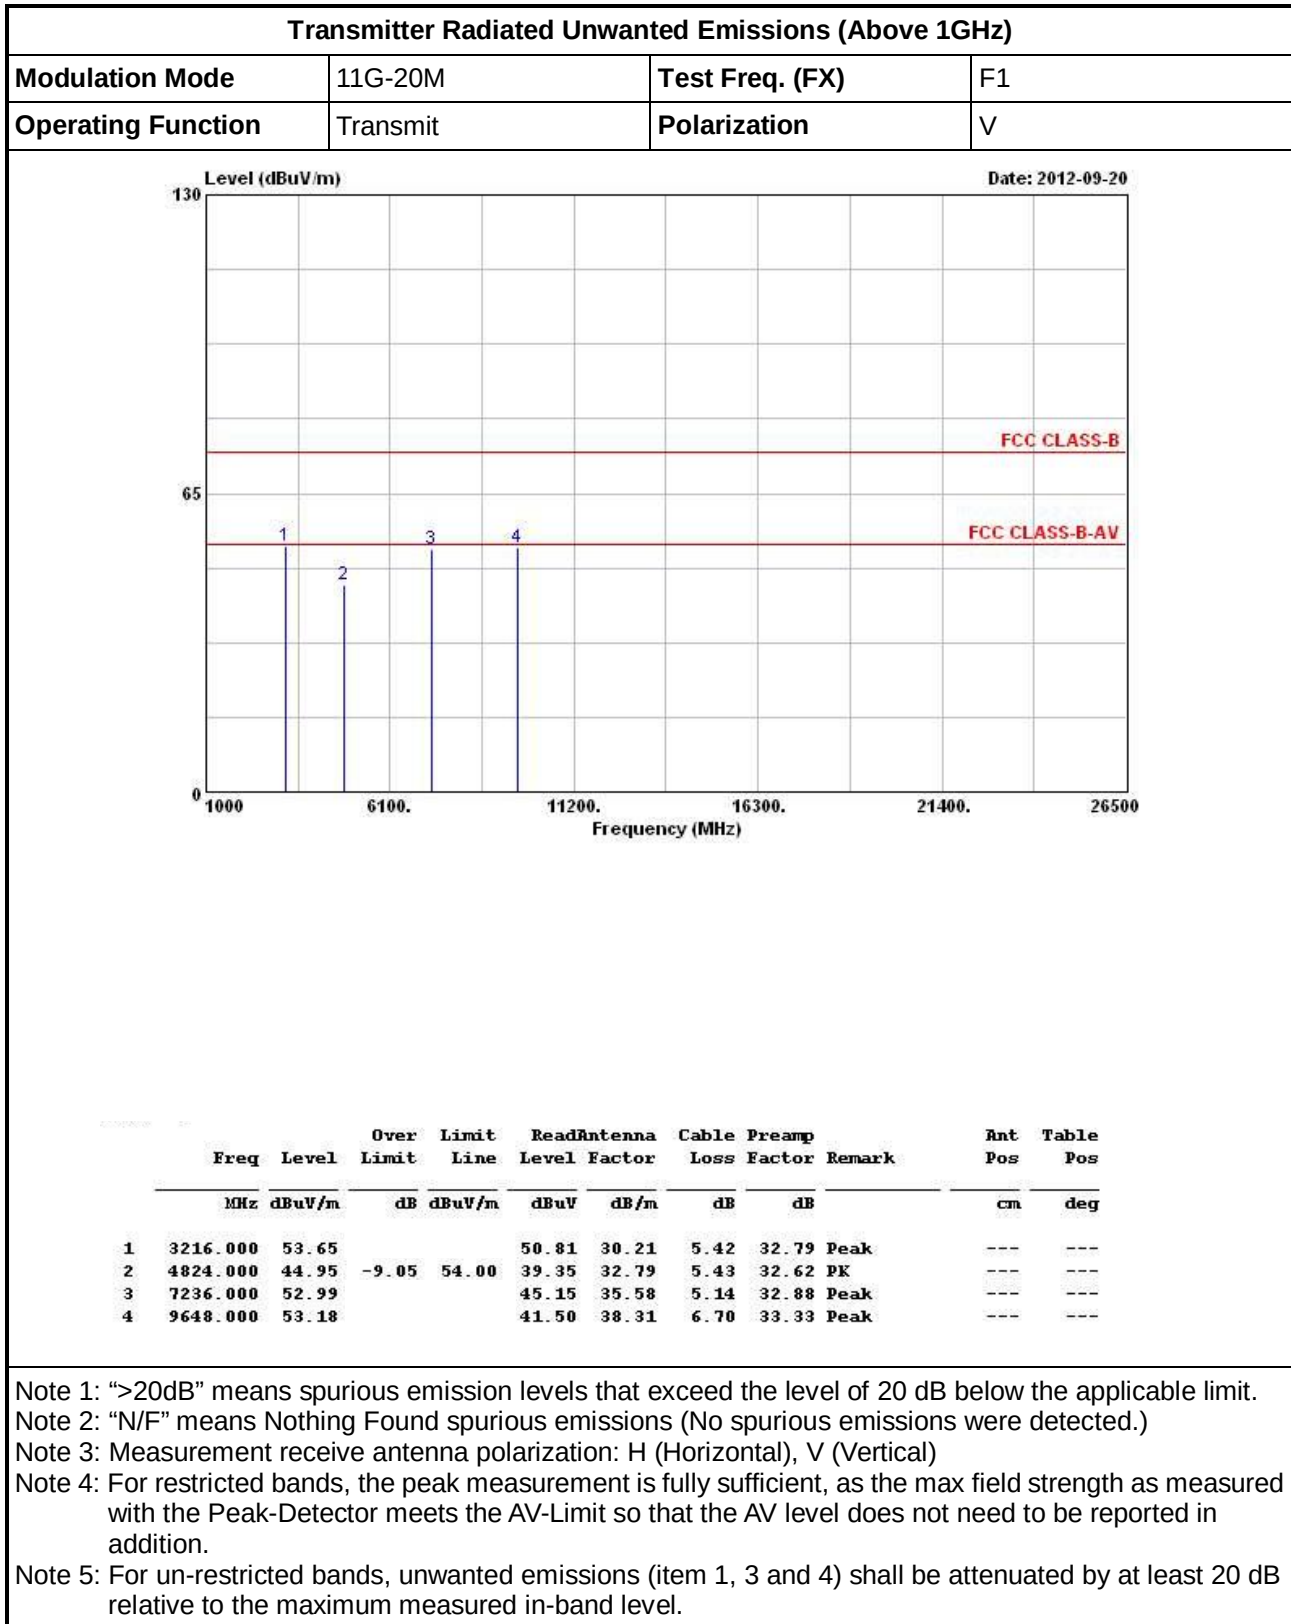3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11G-20M-N_{TX} 1


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

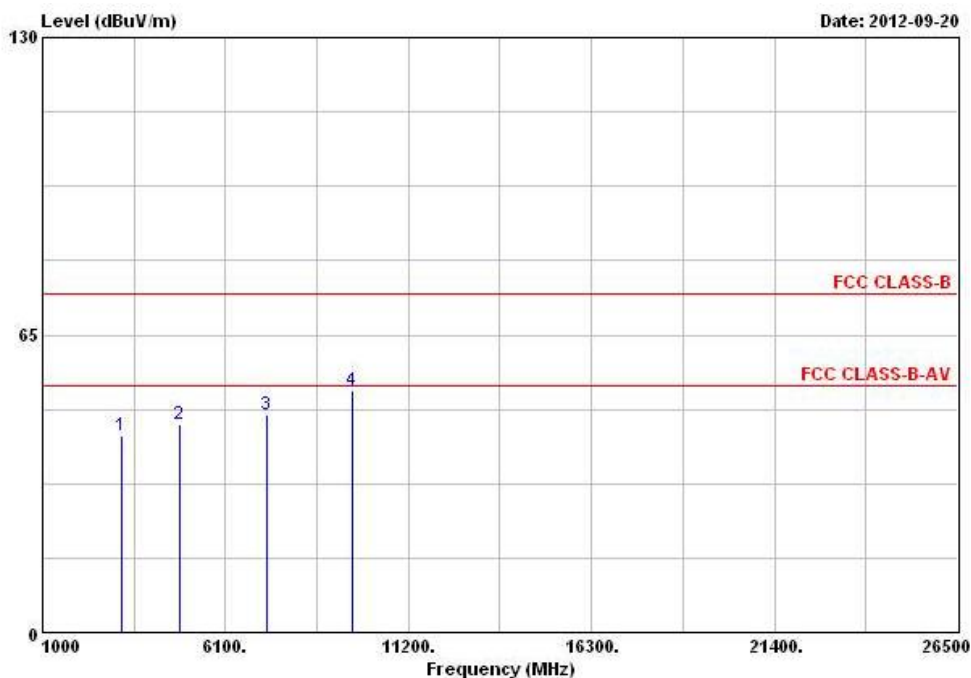

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3216.000	42.92			40.08	30.21	5.42	32.79	Peak	---	---
2	4824.000	45.60	-8.40	54.00	40.00	32.79	5.43	32.62	PK	---	---
3	7236.000	47.65			39.81	35.58	5.14	32.88	Peak	---	---
4	9648.000	52.91			41.23	38.31	6.70	33.33	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

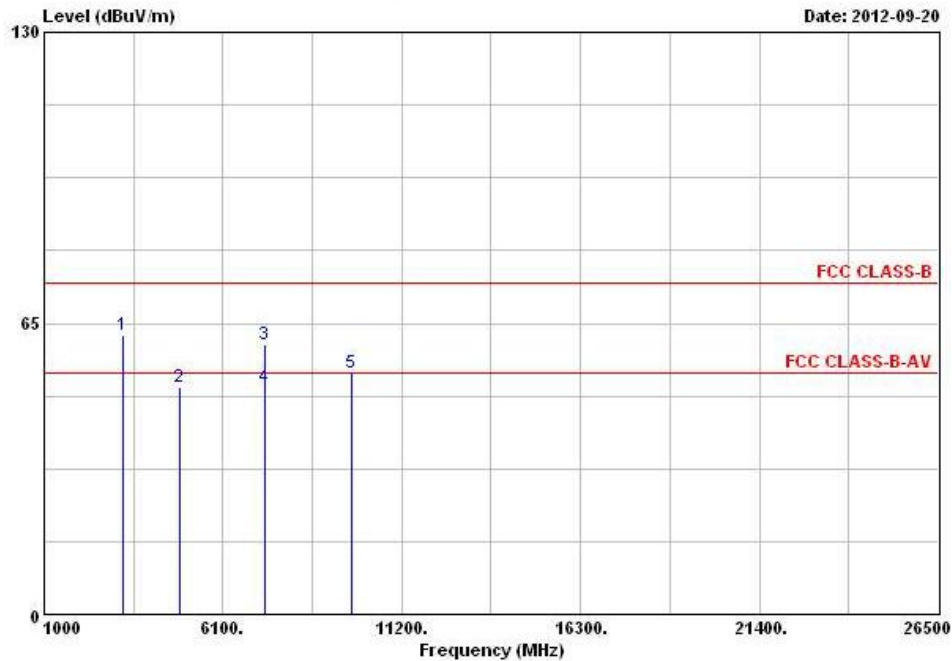

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3238.000	62.47			59.56	30.28	5.42	32.79	Peak	---	---
2	4874.000	50.79	-3.21	54.00	45.09	32.88	5.43	32.61	PK	---	---
3	7311.000	60.37	-13.63	74.00	52.16	35.74	5.36	32.89	Peak	---	---
4	7311.000	50.67	-3.33	54.00	42.46	35.74	5.36	32.89	Average	---	---
5	9748.000	53.92			41.98	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

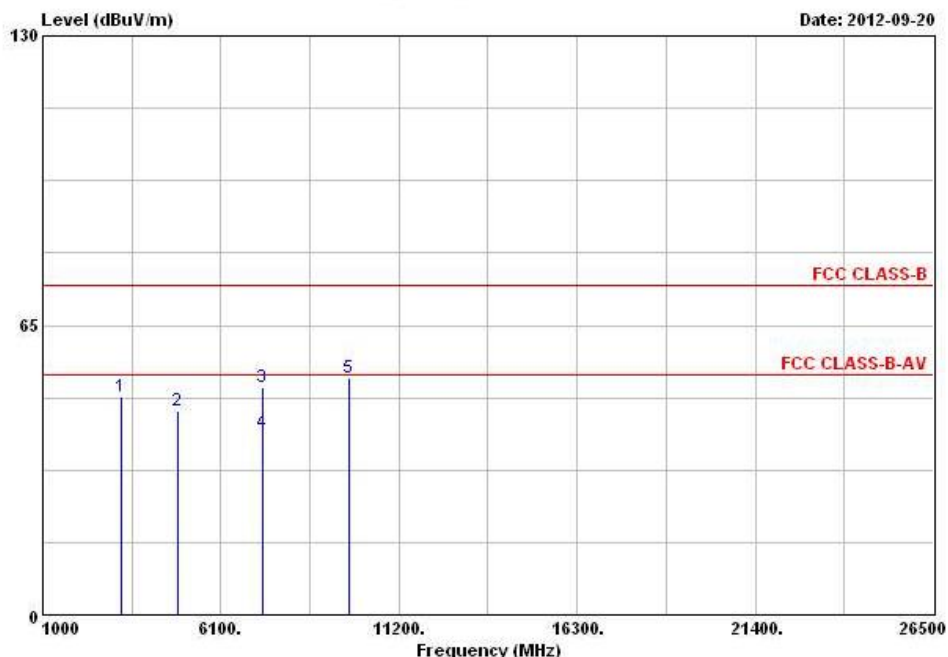

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3249.000	49.05			46.14	30.28	5.42	32.79	Peak	---	---
2	4874.000	45.92	-8.08	54.00	40.22	32.88	5.43	32.61	PK	---	---
3	7311.000	51.17	-22.83	74.00	42.96	35.74	5.36	32.89	Peak	---	---
4	7311.000	40.82	-13.18	54.00	32.61	35.74	5.36	32.89	Average	---	---
5	9748.000	53.08			41.14	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

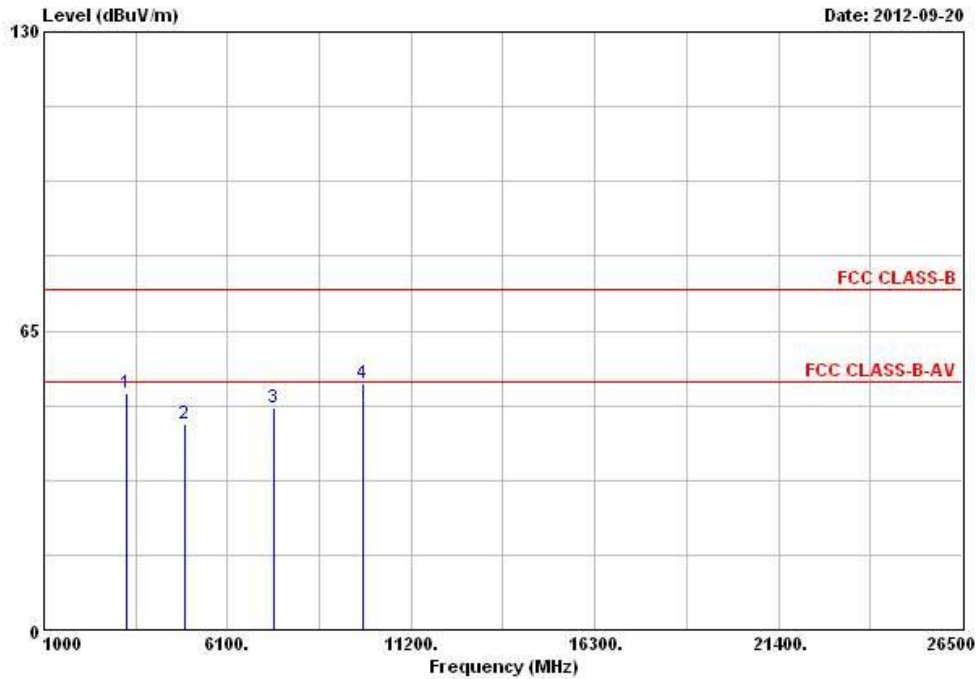

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3282.000	51.46			48.49	30.35	5.41	32.79	Peak	---	---
2	4924.000	44.84	-9.16	54.00	39.05	32.98	5.41	32.60	PK	---	---
3	7386.000	48.26	-5.74	54.00	39.65	35.95	5.57	32.91	PK	---	---
4	9848.000	53.53			41.35	38.69	6.80	33.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

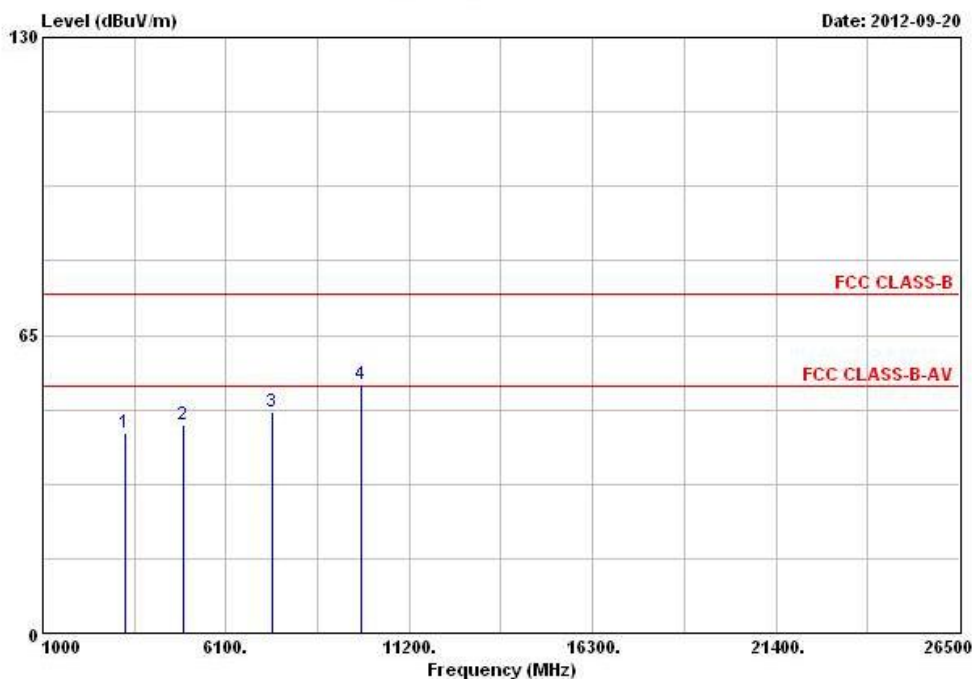

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3282.000	43.76			40.79	30.35	5.41	32.79 Peak	---	---
2	4924.000	45.62	-8.38	54.00	39.83	32.98	5.41	32.60 PK	---	---
3	7386.000	48.28	-5.72	54.00	39.67	35.95	5.57	32.91 PK	---	---
4	9848.000	54.26			42.08	38.69	6.80	33.31 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

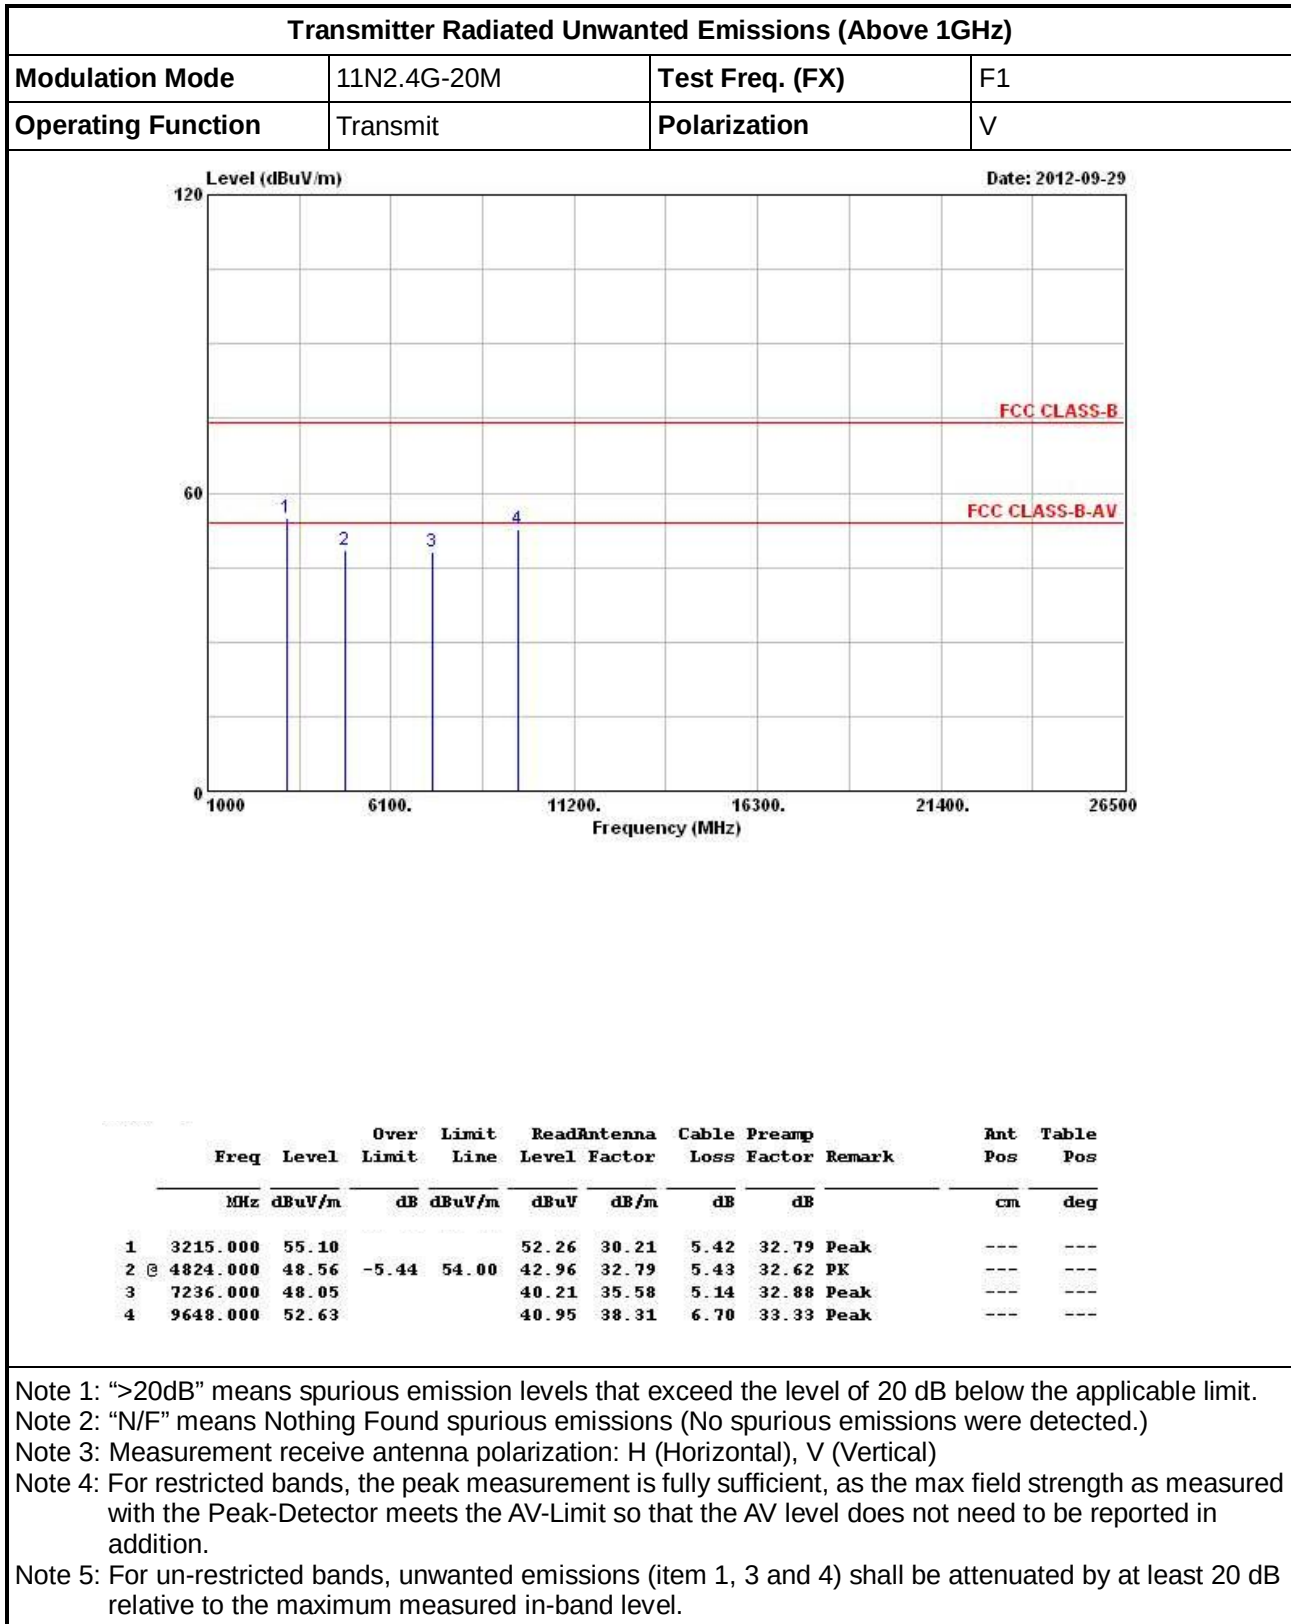3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N2.4G-20M-N_{TX} 1


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

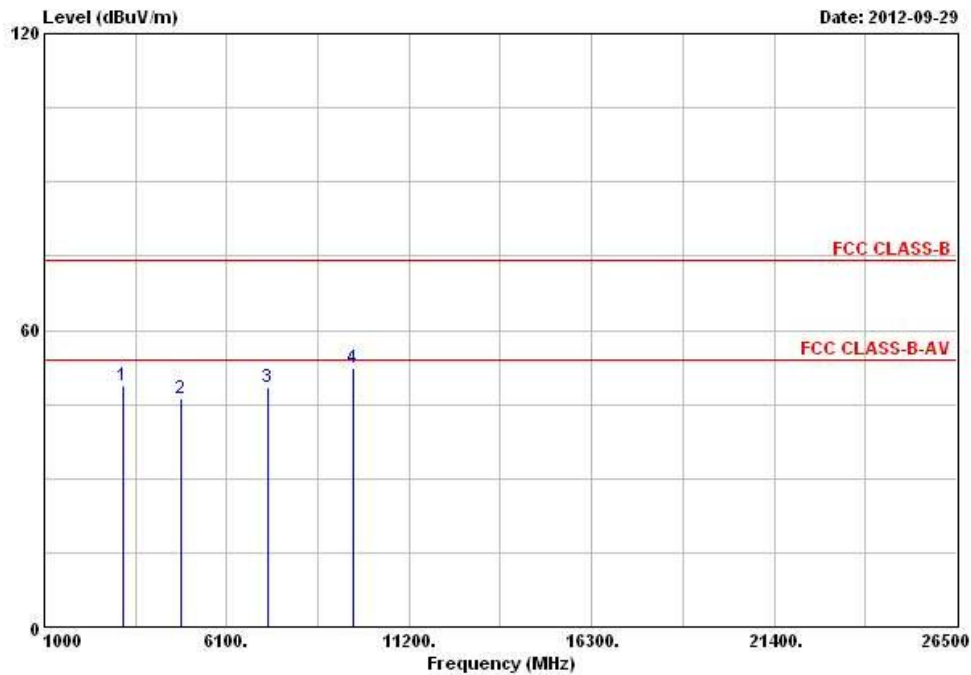

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3215.000	48.73			45.89	30.21	5.42	32.79	Peak	---	---
2	4824.000	46.15	-7.85	54.00	40.55	32.79	5.43	32.62	PK	---	---
3	7236.000	48.36			40.52	35.58	5.14	32.88	Peak	---	---
4	9648.000	52.38			40.70	38.31	6.70	33.33	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

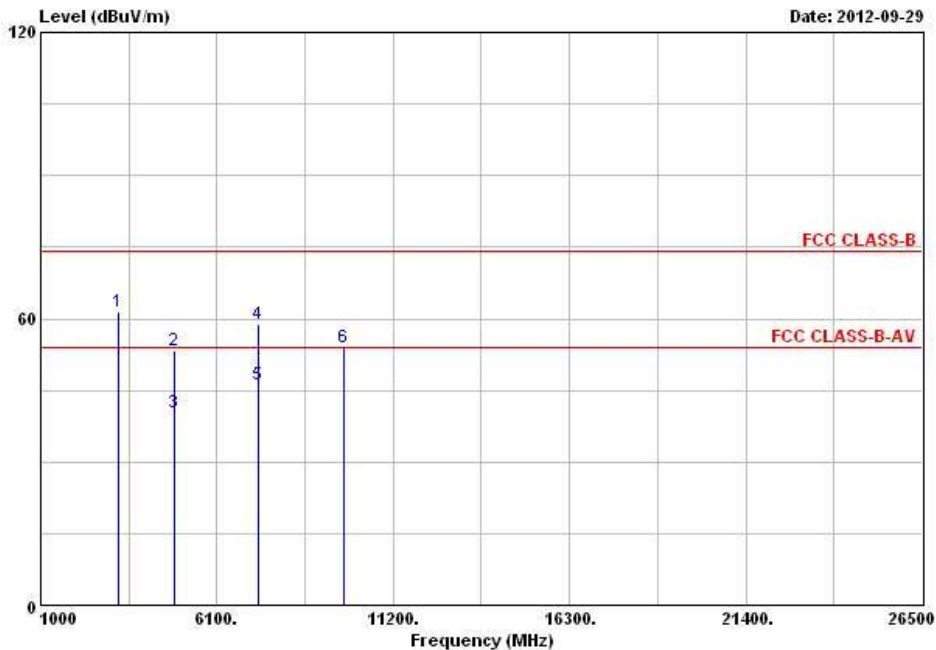

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3249.000	61.37			58.46	30.28	5.42	32.79	Peak	---	---
2	4874.000	53.28	-20.72	74.00	47.58	32.88	5.43	32.61	Peak	---	---
3	4874.000	40.36	-13.64	54.00	34.66	32.88	5.43	32.61	Average	---	---
4	7311.000	58.96	-15.04	74.00	50.75	35.74	5.36	32.89	Peak	---	---
5	7311.000	46.12	-7.88	54.00	37.91	35.74	5.36	32.89	Average	---	---
6	9748.000	53.98			42.04	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

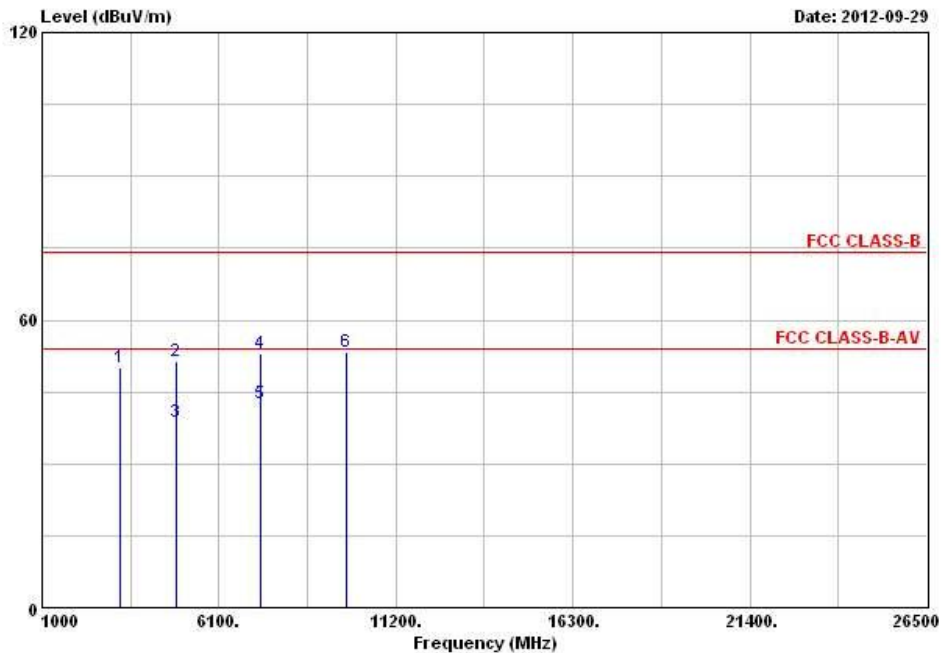

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3249.000	50.11			47.20	30.28	5.42	32.79	Peak	---	---
2	4874.000	51.29	-22.71	74.00	45.59	32.88	5.43	32.61	Peak	---	---
3	4874.000	38.69	-15.31	54.00	32.99	32.88	5.43	32.61	Average	---	---
4	7311.000	53.03	-20.97	74.00	44.82	35.74	5.36	32.89	Peak	---	---
5	7311.000	42.52	-11.48	54.00	34.31	35.74	5.36	32.89	Average	---	---
6	9748.000	53.22			41.28	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

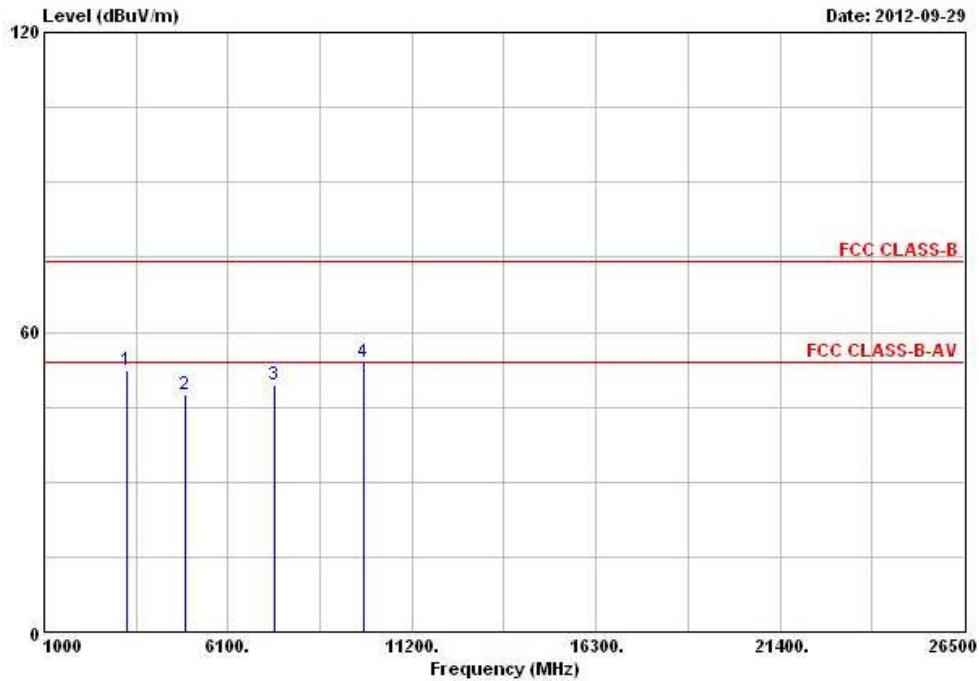

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3282.000	52.48			49.51	30.35	5.41	32.79	Peak	---	---
2	4924.000	47.33	-6.67	54.00	41.54	32.98	5.41	32.60	PK	---	---
3	7386.000	49.32	-4.68	54.00	40.71	35.95	5.57	32.91	PK	---	---
4	9848.000	54.11			41.93	38.69	6.80	33.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M-N ^{TX} 1	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

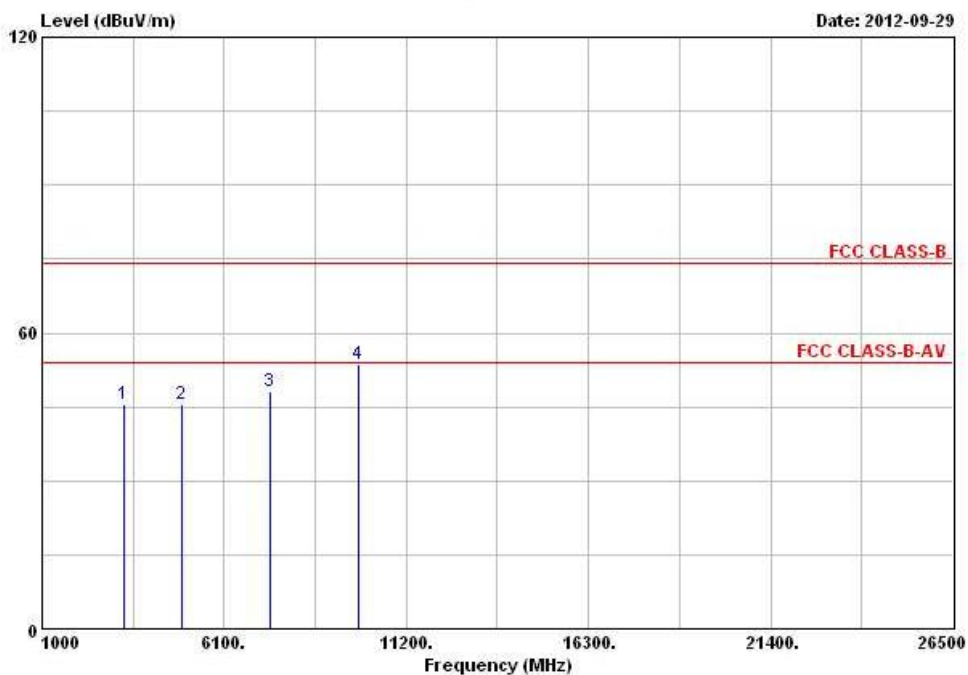

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3282.000	45.55			42.58	30.35	5.41	32.79	Peak	---	---
2	4924.000	45.61	-8.39	54.00	39.82	32.98	5.41	32.60	PK	---	---
3	7386.000	48.19	-5.81	54.00	39.58	35.95	5.57	32.91	PK	---	---
4	9848.000	53.60			41.42	38.69	6.80	33.31	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

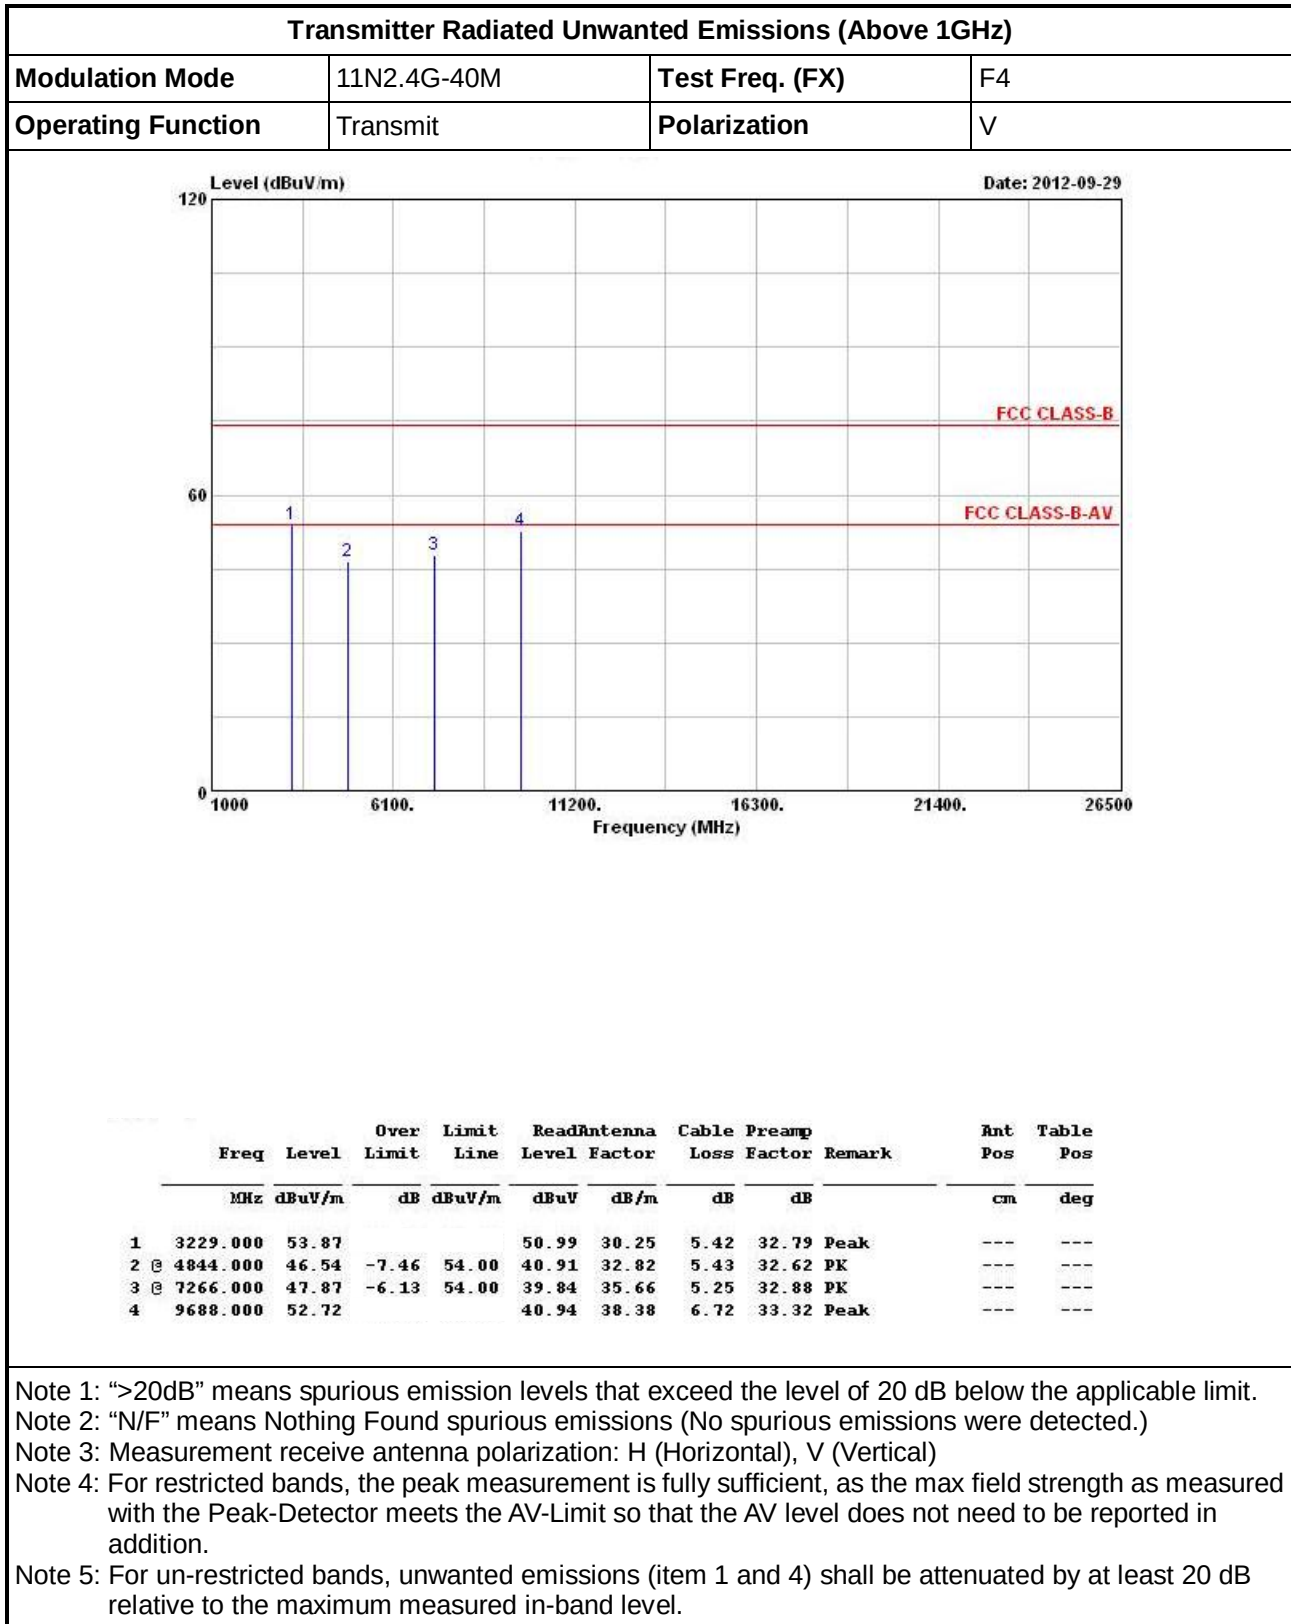3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N2.4G-40M-N_{TX} 1


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	H

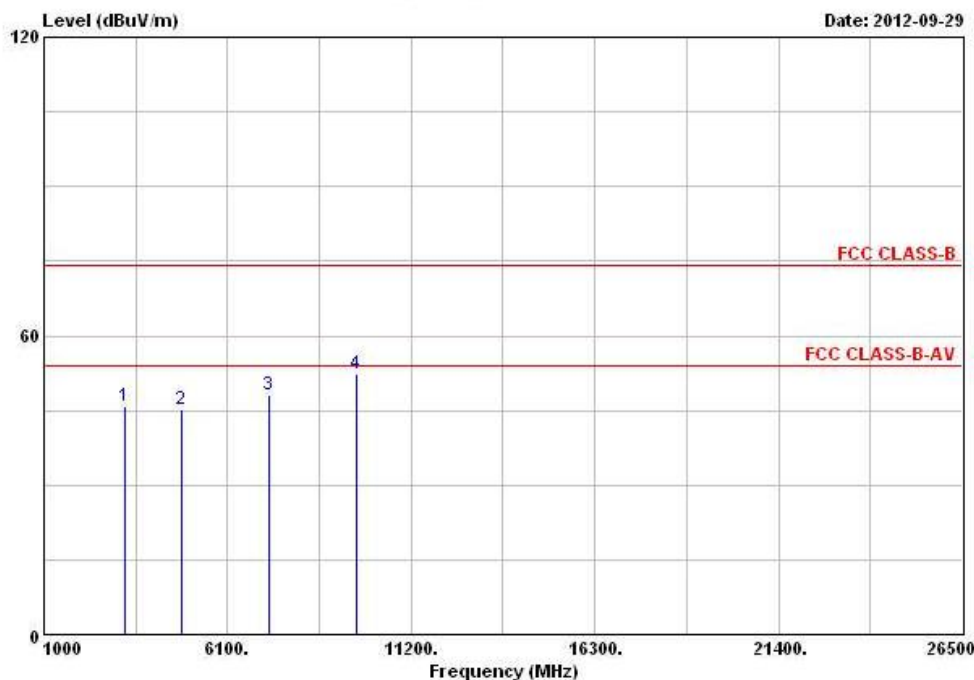

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3229.000	45.97			43.09	30.25	5.42	32.79	Peak	---	---
2	4844.000	45.26	-8.74	54.00	39.63	32.82	5.43	32.62	PK	---	---
3	7266.000	48.02	-5.98	54.00	39.99	35.66	5.25	32.88	PK	---	---
4	9688.000	52.45			40.67	38.38	6.72	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	V

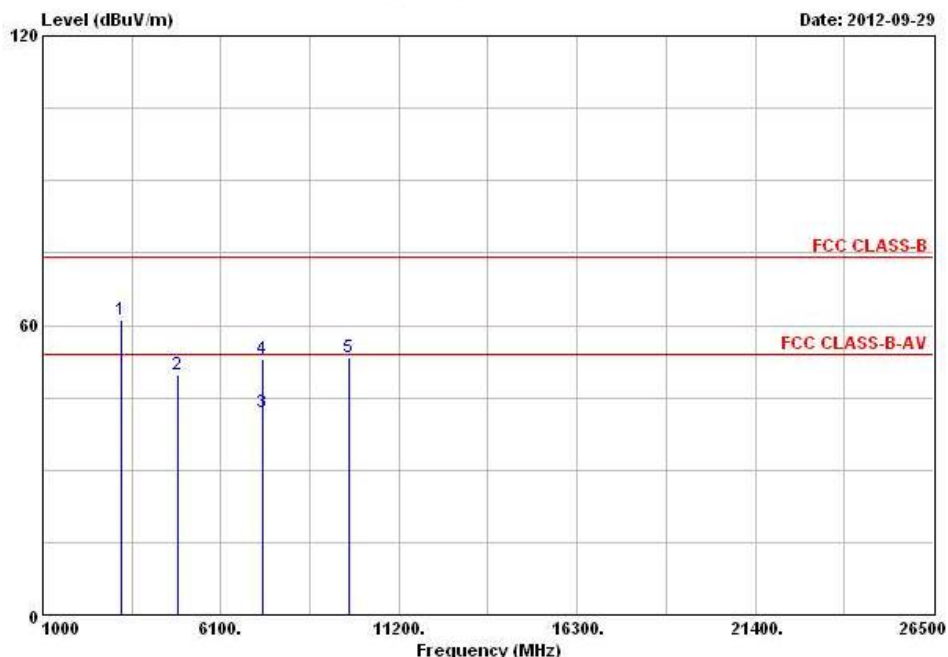

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3249.000	61.26			58.35	30.28	5.42	32.79	Peak	---
2	4874.000	49.82	-4.18	54.00	44.12	32.88	5.43	32.61	PK	---
3	7311.000	41.91	-12.09	54.00	33.70	35.74	5.36	32.89	Average	---
4	7311.000	52.85	-21.15	74.00	44.64	35.74	5.36	32.89	Peak	---
5	9748.000	53.40			41.46	38.52	6.74	33.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	H

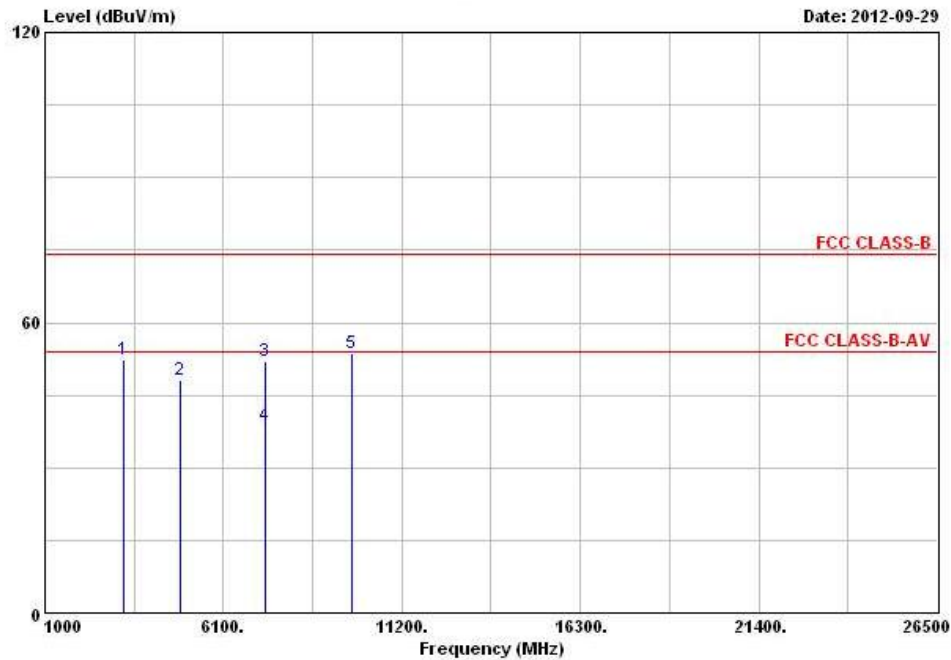

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3249.000	52.30			49.39	30.28	5.42	32.79	Peak	---	---
2	4874.000	47.97	-6.03	54.00	42.27	32.88	5.43	32.61	PK	---	---
3	7311.000	51.88	-22.12	74.00	43.67	35.74	5.36	32.89	Peak	---	---
4	7311.000	38.71	-15.29	54.00	30.50	35.74	5.36	32.89	Average	---	---
5	9748.000	53.59			41.65	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	V

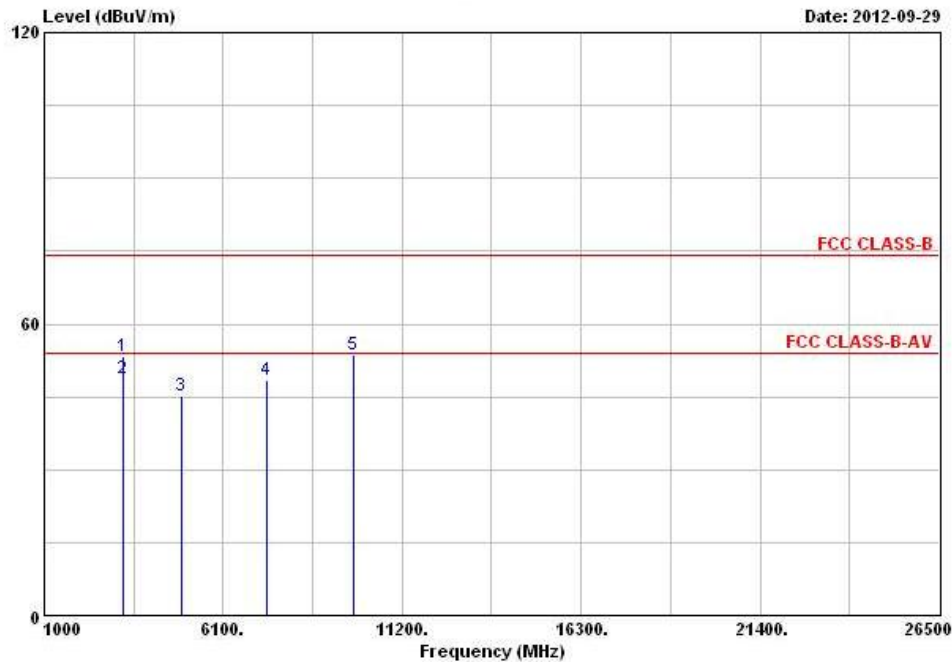

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3269.000	53.33			50.38	30.32	5.42	32.79	Peak	---	---
2	3269.000	48.62			45.67	30.32	5.42	32.79	Average	---	---
3	4904.000	45.29	-8.71	54.00	39.54	32.94	5.42	32.61	PK	---	---
4	7356.000	48.38	-5.62	54.00	39.95	35.87	5.46	32.90	PK	---	---
5	9808.000	53.66			41.58	38.62	6.78	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 2 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	H

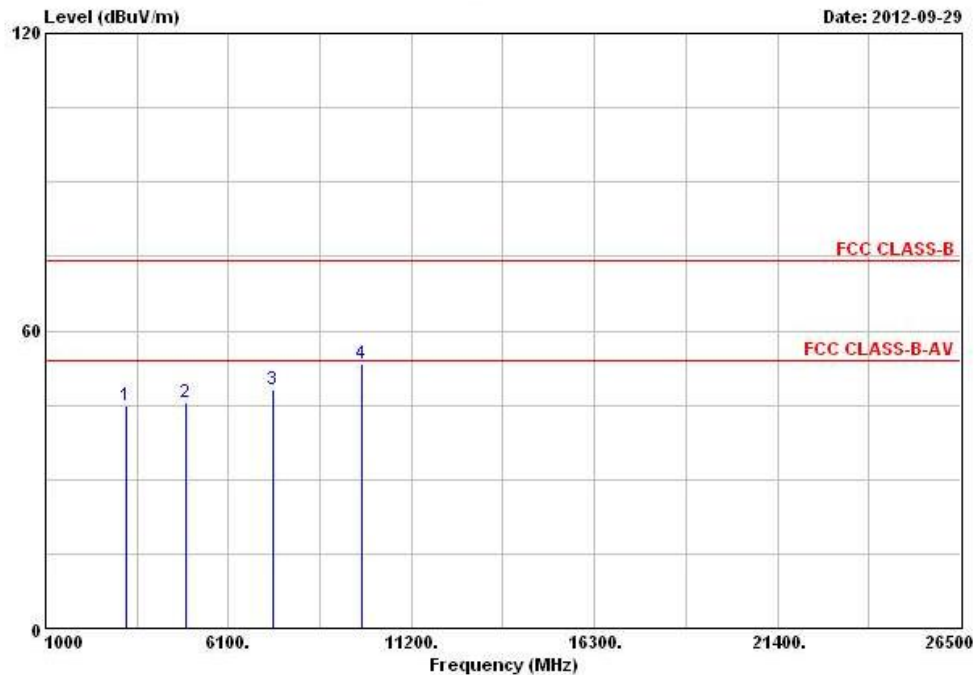

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3269.000	44.91			41.96	30.32	5.42	32.79 Peak	---	---
2	4904.000	45.46	-8.54	54.00	39.71	32.94	5.42	32.61 PK	---	---
3 @	7356.000	48.15	-5.85	54.00	39.72	35.87	5.46	32.90 PK	---	---
4	9808.000	53.27			41.19	38.62	6.78	33.32 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

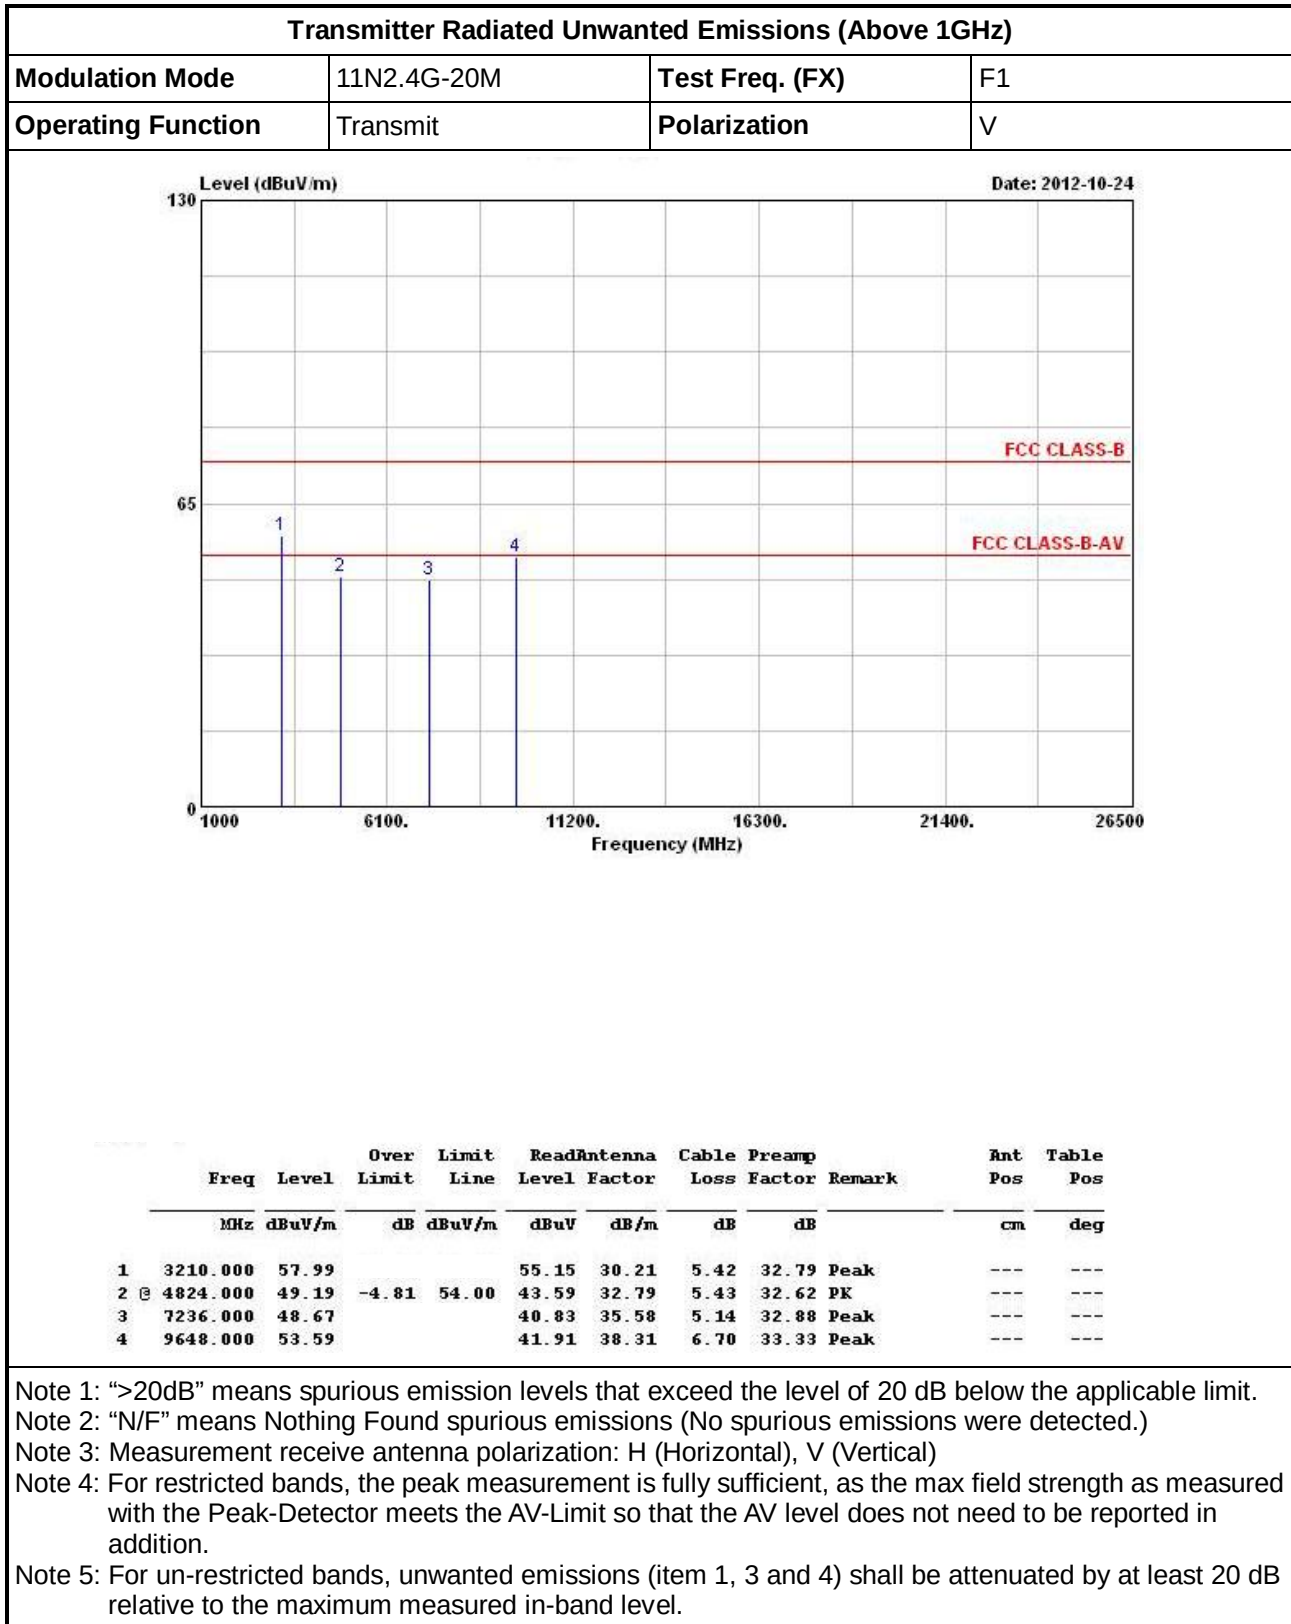3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N2.4G-20M- N_{TX} 2


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

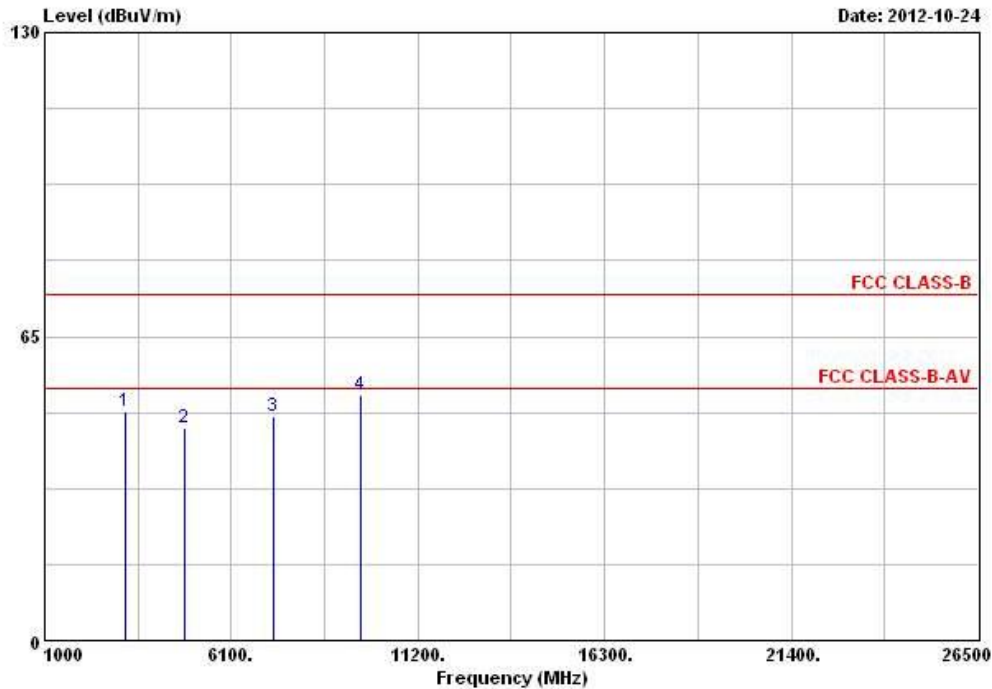

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3210.000	48.97			46.13	30.21	5.42	32.79	Peak	---	---
2	4824.000	45.59	-8.41	54.00	39.99	32.79	5.43	32.62	PK	---	---
3	7236.000	47.85			40.01	35.58	5.14	32.88	Peak	---	---
4	9648.000	52.33			40.65	38.31	6.70	33.33	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

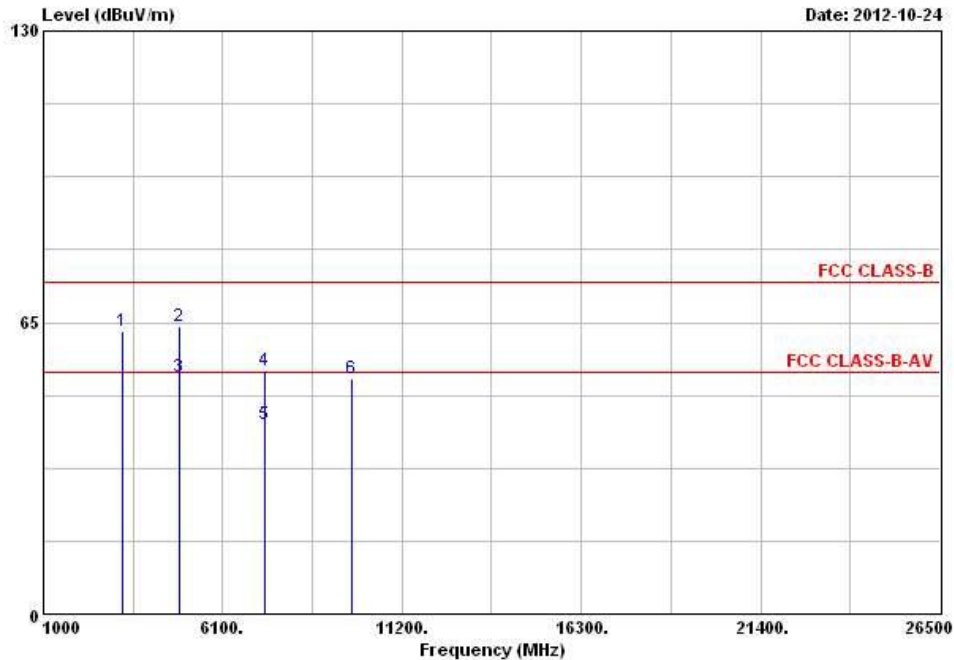

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3238.000	63.02			60.11	30.28	5.42	32.79	Peak	---	---
2	4874.000	64.26	-9.74	74.00	58.56	32.88	5.43	32.61	Peak	---	---
3	4874.000	52.81	-1.19	54.00	47.11	32.88	5.43	32.61	Average	---	---
4	7311.000	54.37	-19.63	74.00	46.16	35.74	5.36	32.89	Peak	---	---
5	7311.000	42.25	-11.75	54.00	34.04	35.74	5.36	32.89	Average	---	---
6	9748.000	52.57			40.63	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

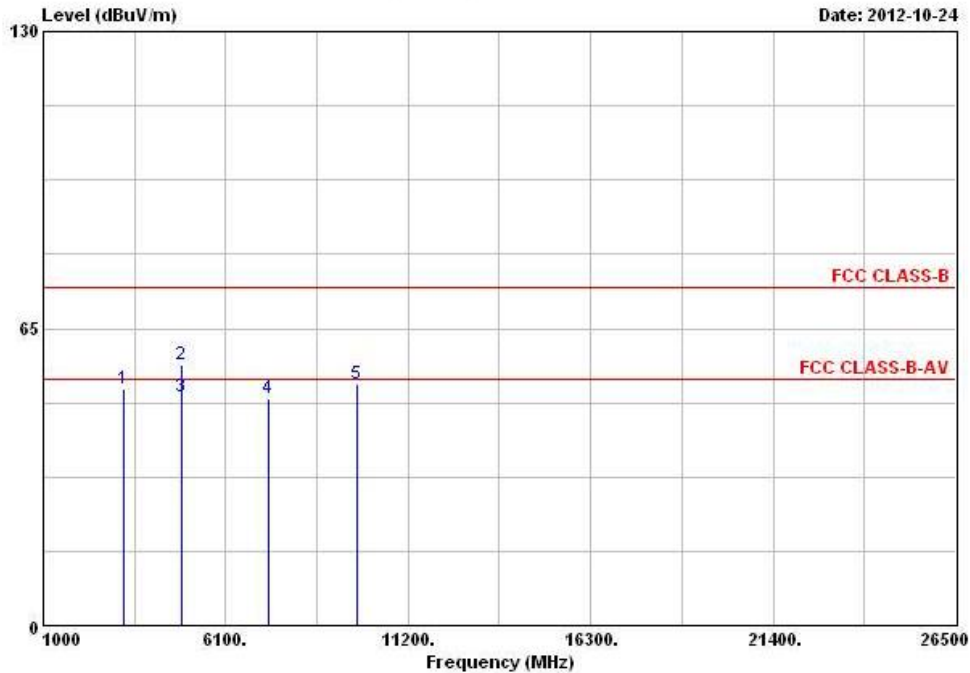

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3238.000	51.79			48.88	30.28	5.42	32.79	Peak	---	---
2	4874.000	57.12	-16.88	74.00	51.42	32.88	5.43	32.61	Peak	---	---
3	4874.000	50.10	-3.90	54.00	44.40	32.88	5.43	32.61	Average	---	---
4	7311.000	49.52	-4.48	54.00	41.31	35.74	5.36	32.89	PK	---	---
5	9748.000	52.94			41.00	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

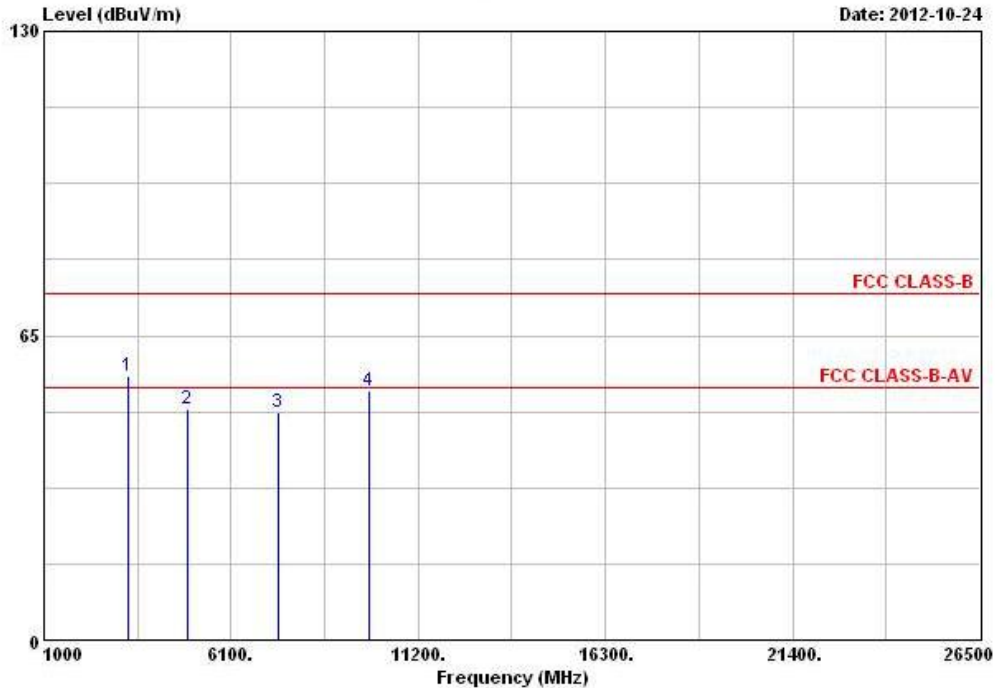

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3273.000	56.35			53.37	30.35	5.42	32.79	Peak	---	---
2 @	4924.000	49.49	-4.51	54.00	43.70	32.98	5.41	32.60	PK	---	---
3 @	7386.000	48.78	-5.22	54.00	40.17	35.95	5.57	32.91	PK	---	---
4	9848.000	53.19			41.01	38.69	6.80	33.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

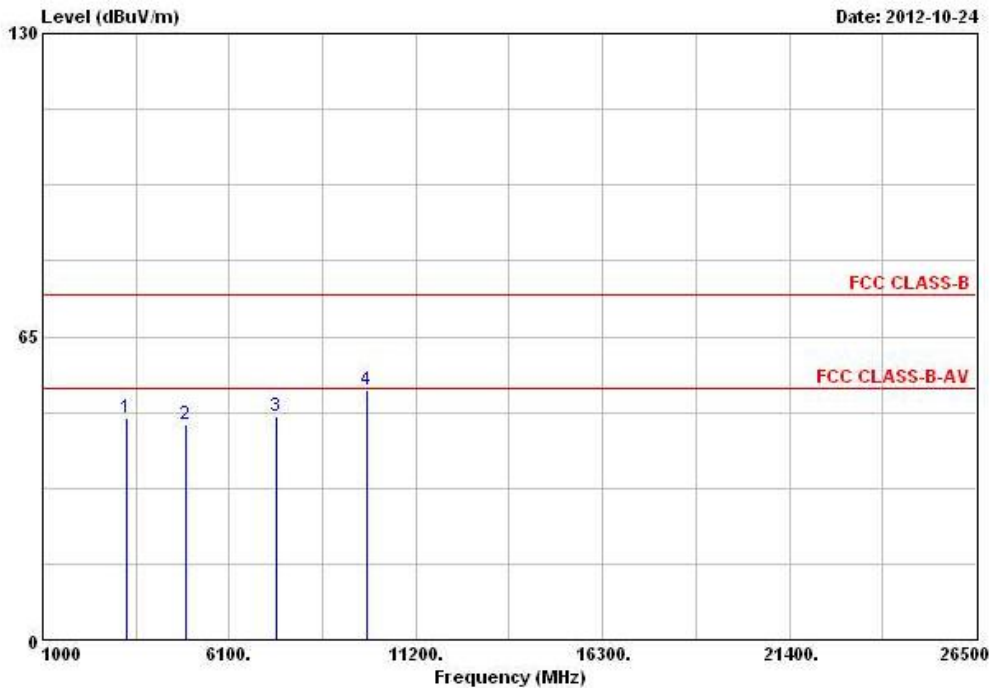

	Freq	Level	Over Limit	Limit Line	Read Antenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3273.000	47.39			44.41	30.35	5.42	32.79 Peak	---	---
2	4924.000	46.07	-7.93	54.00	40.28	32.98	5.41	32.60 PK	---	---
3	7386.000	48.02	-5.98	54.00	39.41	35.95	5.57	32.91 PK	---	---
4	9848.000	53.46			41.28	38.69	6.80	33.31 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

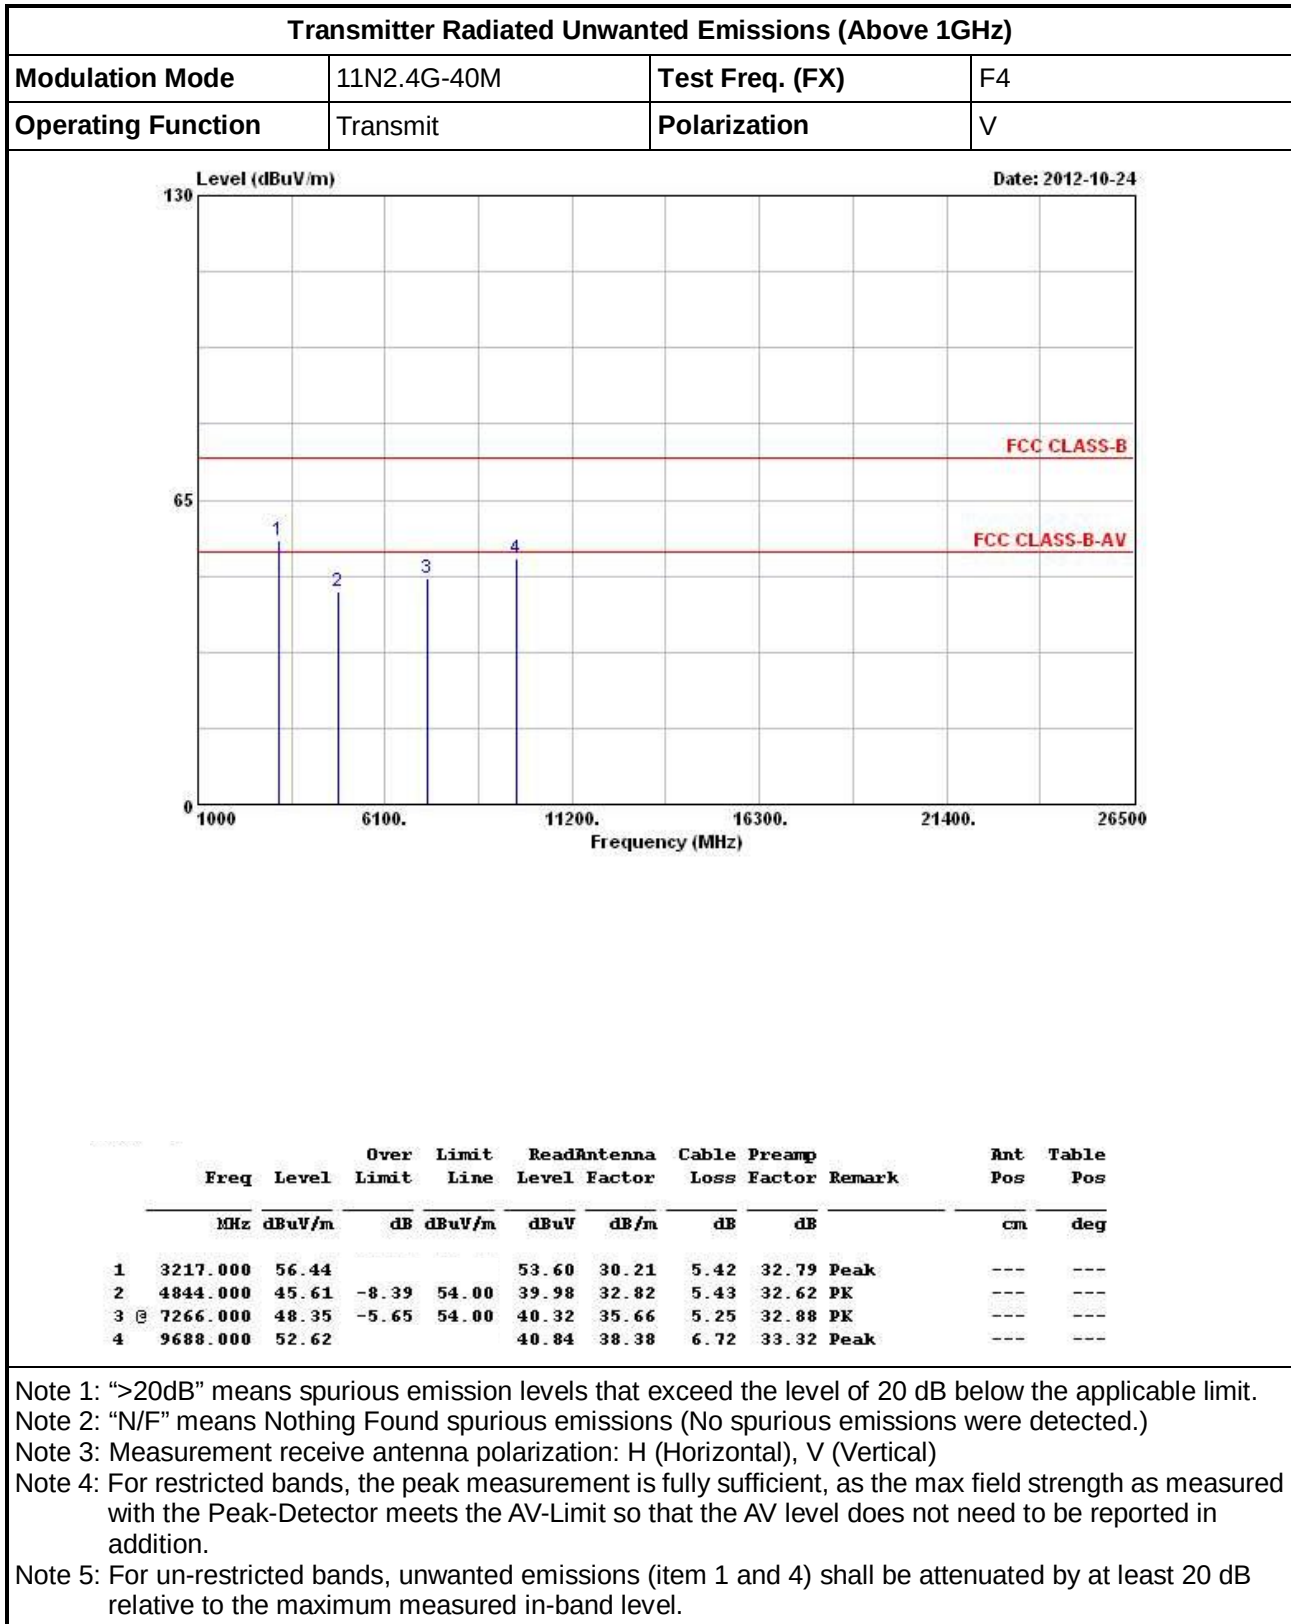3.6.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N2.4G-40M- N_{TX} 2


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	H

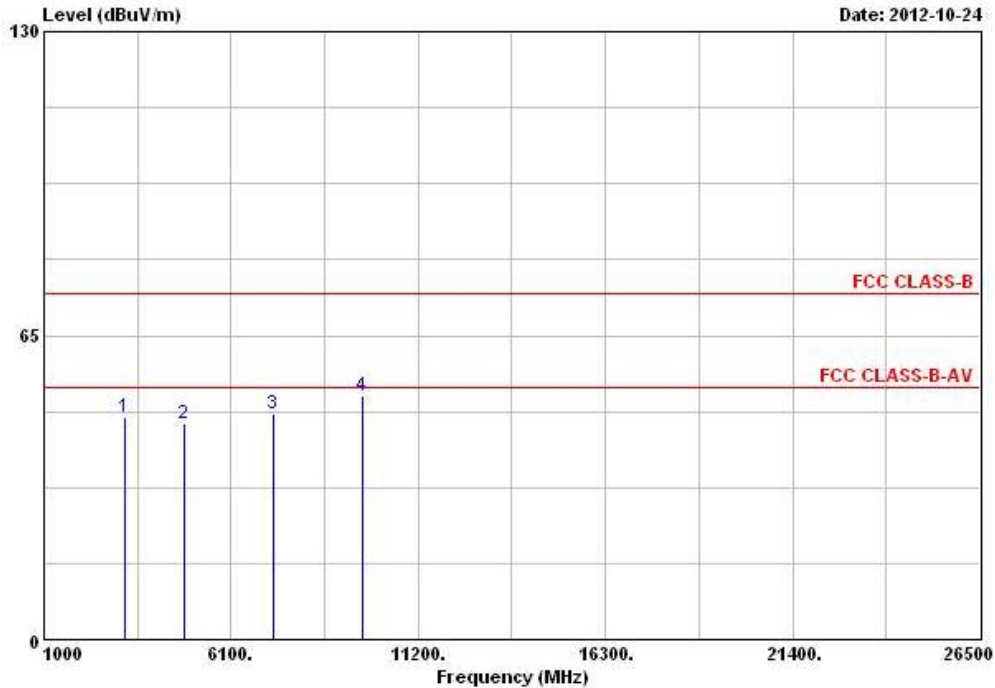

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3217.000	47.43			44.59	30.21	5.42	32.79	Peak	---	---
2	4844.000	46.15	-7.85	54.00	40.52	32.82	5.43	32.62	PK	---	---
3 @	7266.000	48.14	-5.86	54.00	40.11	35.66	5.25	32.88	PK	---	---
4	9688.000	52.24			40.46	38.38	6.72	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	V

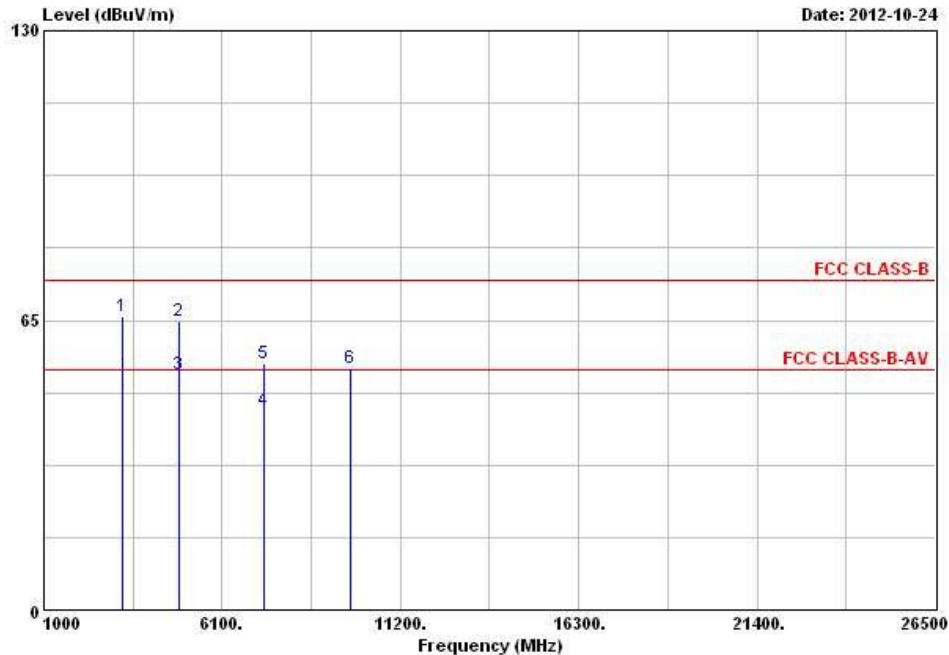

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3238.000	65.78			62.87	30.28	5.42	32.79	Peak	---	---
2	4874.000	64.71	-9.29	74.00	59.01	32.88	5.43	32.61	Peak	---	---
3	4874.000	52.72	-1.28	54.00	47.02	32.88	5.43	32.61	Average	---	---
4	7311.000	44.80	-9.20	54.00	36.59	35.74	5.36	32.89	Average	---	---
5	7311.000	55.36	-18.64	74.00	47.15	35.74	5.36	32.89	Peak	---	---
6	9748.000	54.24			42.30	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	H

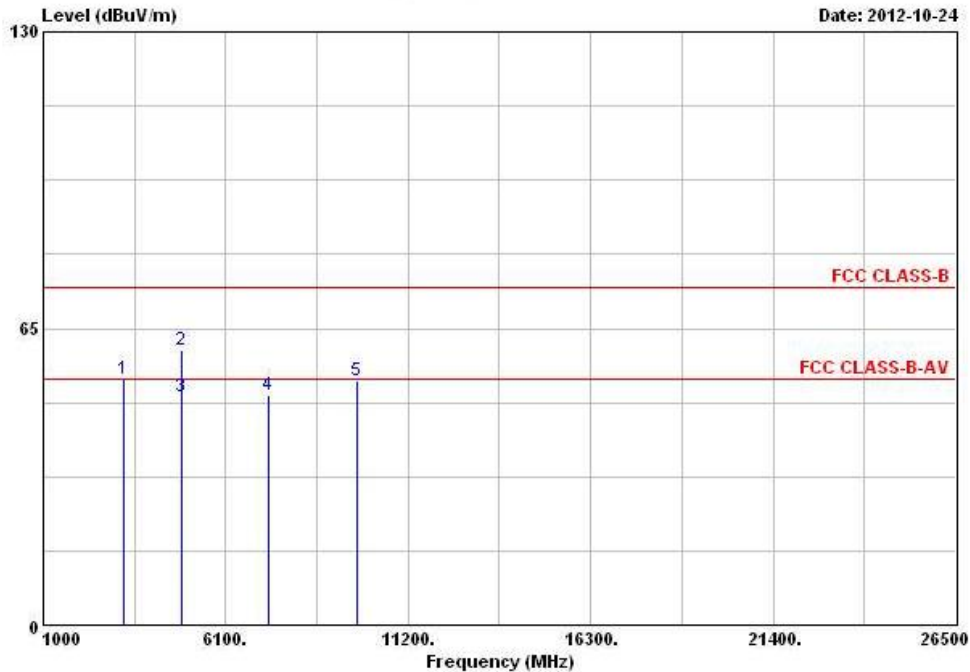

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3238.000	54.02			51.11	30.28	5.42	32.79	Peak	---	---
2	4874.000	60.12	-13.88	74.00	54.42	32.88	5.43	32.61	Peak	---	---
3	4874.000	50.04	-3.96	54.00	44.34	32.88	5.43	32.61	Average	---	---
4	7311.000	50.50	-3.50	54.00	42.29	35.74	5.36	32.89	PK	---	---
5	9748.000	53.54			41.60	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	V

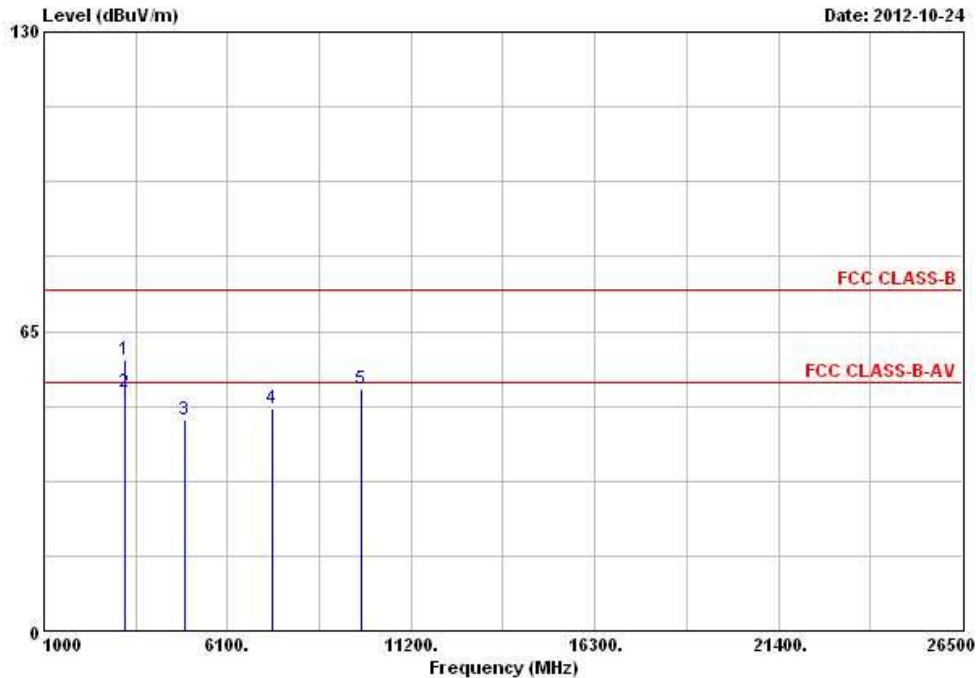

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3266.000	58.75	-15.25	74.00	55.80	30.32	5.42	32.79	Peak	---	---
2	3266.000	51.71	-2.29	54.00	48.76	30.32	5.42	32.79	Average	---	---
3	4904.000	45.63	-8.37	54.00	39.88	32.94	5.42	32.61	PK	---	---
4	7356.000	48.41	-5.59	54.00	39.98	35.87	5.46	32.90	PK	---	---
5	9808.000	52.45			40.37	38.62	6.78	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	H

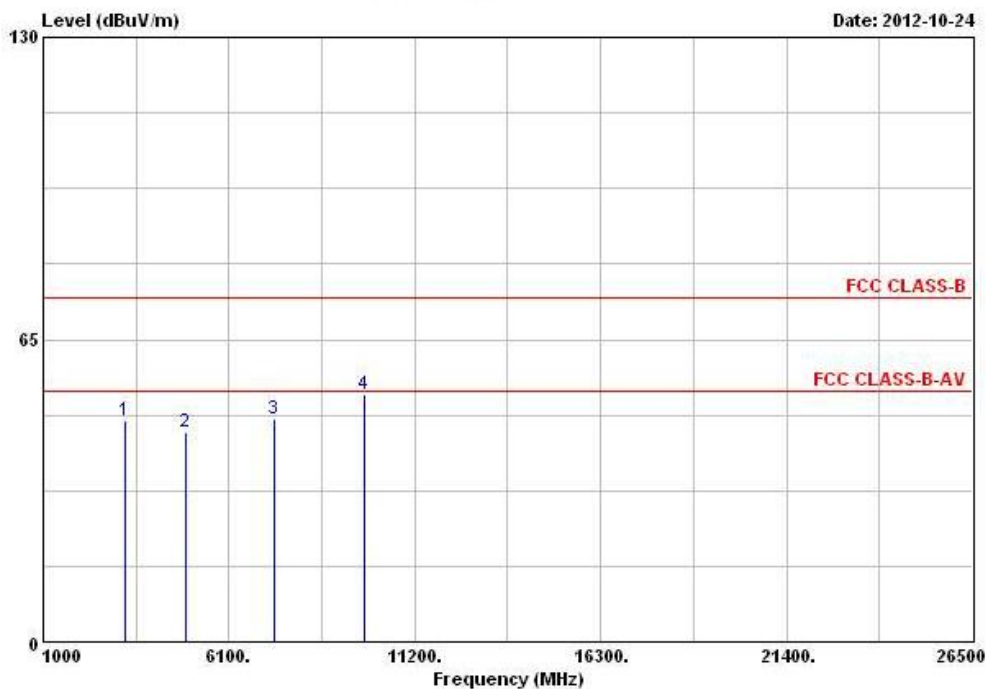

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3266.000	47.56	-6.44	54.00	44.61	30.32	5.42	32.79 PK	---	---
2	4904.000	45.05	-8.95	54.00	39.30	32.94	5.42	32.61 PK	---	---
3	7356.000	48.03	-5.97	54.00	39.60	35.87	5.46	32.90 PK	---	---
4	9808.000	53.05			40.97	38.62	6.78	33.32 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSV 40	15195-01-00	9KHz~40GHz	Jan. 06, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz ~ 40GHz	Nov. 22, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



FCC RADIO TEST REPORT

Report No. : FR281440AC

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 12, 2011	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 10, 2012	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug 16 2012	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9kHz ~ 40GHz	Feb. 01, 2012	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Oct. 22, 2011	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 30, 2012	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan.13, 2012	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Jan. 18, 2012	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 18, 2012	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

5 Certification of TAF Accreditation



Certificate No. : L1190-120405

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date: April 05, 2012

P1, total 24 pages