

BNNetzA-CAB-02/21-102

TEST REPORT

Test report no.: 1-7077_23-01-05_TR1_R2



Testing laboratory

cetecom advanced GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <https://cetecomadvanced.com>
e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

Applicant

SAGEMCOM BROADBAND SAS
4 rue des Messageries
92270 Bois-Colombes / FRANCE
Phone: -/-
Contact: Benjamin Murindangabo
e-mail: benjamin.murindangabo-ext@sagemcom.com

Manufacturer

SAGEMCOM BROADBAND SAS
4 rue des Messageries
92270 Bois-Colombes / FRANCE

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Set top Box
Model name:	DCIW377 DISH
FCC ID:	VW3DCIW377D
Frequency:	UNII bands: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz; 5470 MHz to 5725 MHz; 5725 MHz to 5850 MHz
Technology tested:	WLAN
Antenna:	Two integrated antennas
Power supply:	100 V to 240 V AC by mains
Temperature range:	0°C to 40°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

cn=Marco Bertolino, o=cetecom advanced GmbH, ou=BTL-230530, email=marco.bertolino@cetecomadvanced.com, c=DE
2024.03.19 15:36:34 +01'00'

Marco Bertolino
Supervisor Radio Services
Radio Labs

Test performed:

cn=Andreas Kurzkurt, o=cetecom advanced GmbH, ou=KZK-230606, email=andreas.kurzkurt@cetecomadvanced.com, c=DE

Andreas Kurzkurt
Testing Manager
Radio Labs

1 Table of contents

1	Table of contents.....	2
2	General information	4
2.1	Notes and disclaimer	4
2.2	Application details	4
2.3	Test laboratories sub-contracted	4
3	Test standard/s, references and accreditations	5
4	Reporting statements of conformity – decision rule	6
5	Test environment.....	7
6	Test item	7
6.1	General description	7
6.2	Additional information	7
7	Description of the test setup.....	8
7.1	Shielded semi anechoic chamber	9
7.2	Shielded fully anechoic chamber.....	10
7.3	Radiated measurements > 18 GHz	11
7.4	Conducted measurements with peak power meter & spectrum analyzer	12
7.5	AC conducted.....	13
8	Sequence of testing.....	14
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	14
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	15
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz.....	16
8.4	Sequence of testing radiated spurious above 18 GHz.....	17
8.5	Sequence of testing radiated spurious above 50 GHz with external mixers .. Fehler! Textmarke nicht definiert.	
9	Measurement uncertainty.....	18
10	Summary of measurement results	19
11	Additional comments.....	20
12	Measurement results	27
12.1	Identify worst case data rate.....	27
12.2	Antenna gain	28
12.3	Duty cycle.....	29
12.4	Maximum output power	30
12.4.1	Maximum output power according to FCC requirements.....	30
12.5	Power spectral density	34
12.5.1	Power spectral density according to FCC requirements.....	34
12.6	Minimum emission bandwidth for the band 5.725-5.85 GHz.....	38
12.7	Spectrum bandwidth / 26 dB bandwidth	40
12.8	Occupied bandwidth / 99% emission bandwidth	43
12.9	Undesirable emissions for transmitters operating in the 5725 MHz to 5850 MHz band (conducted)	45
12.10	Band edge compliance radiated	46

12.11	Spurious emissions radiated below 30 MHz	61
12.12	Spurious emissions radiated 30 MHz to 1 GHz	76
12.13	Spurious emissions radiated 1 GHz to 40 GHz	81
12.14	Spurious emissions conducted < 30 MHz	100
13	Observations	103
14	Glossary	103
15	Document history	104

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-7077_23-01-05_TR1_R1 and dated 2024-01-31.

2.2 Application details

Date of receipt of order: 2023-12-21

Date of receipt of test item: 2024-01-09

Start of test:* 2024-01-09

End of test:* 2024-01-25

Person(s) present during the test: -/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations


Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

Guidance	Version	Description
KDB 789033 D02	v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 662911 D01	v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 8, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

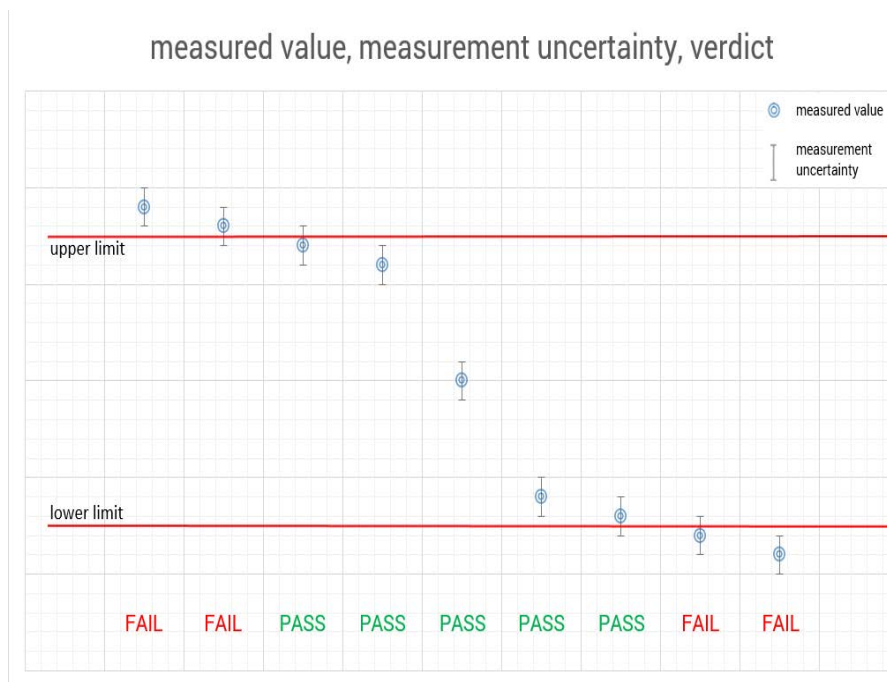

5 Test environment

Temperature :	T _{nom} T _{max} T _{min}	20 °C during room temperature tests No testing under extreme temperature conditions required No testing under extreme temperature conditions required
Relative humidity content :		40 %
Barometric pressure :		Not relevant for this kind of testing
Power supply :	V _{nom} V _{max} V _{min}	115 V AC by mains No testing under extreme voltage conditions required No testing under extreme voltage conditions required

6 Test item

6.1 General description

Kind of test item :	Set top Box
Model name :	DCIW377 DISH
S/N serial number :	Rad. 123456789012 Cond. Config#1
Hardware status :	M377 DISH QAM-1
Software status :	1.1000 RC25.0 wl0: Oct 5 2023 07:36:55 version 18.40.16.72 (bb9a522af056449c897b27dcf6cff960c9572267 WLTEST) FWID 01-7fcabacb
Frequency band :	UNII bands: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz; 5470 MHz to 5725 MHz; 5725 MHz to 5850 MHz
Type of radio transmission : Use of frequency spectrum :	OFDM
Type of modulation :	(D)BPSK, (D)QPSK, 16 – 1024 QAM
Number of channels :	24 with 20 MHz channel bandwidth 11 with 40 MHz channel bandwidth 5 with 80 MHz channel bandwidth
Antenna :	Two integrated antennas
Power supply :	100 V to 240 V AC by mains
Temperature range :	0°C to 40°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-7077_23-01-01_TR1-A101-R1-
1-7077_23-01-01_TR1-A102-R1
1-7077_23-01-01_TR1-A103-R1

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

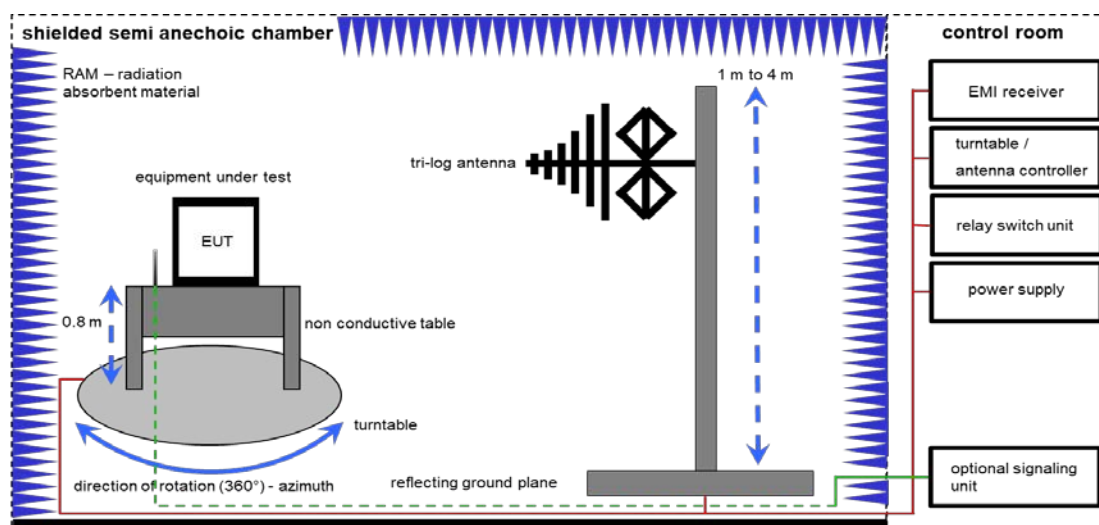

Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.59.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG		300000551	ne	-/-	-/-
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	295	300003787	vKI!	23.05.2023	31.05.2025
6	A	PC	TecLine	F+W		300004388	ne	-/-	-/-
7	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	06.12.2023	31.12.2024

7.2 Shielded fully anechoic chamber

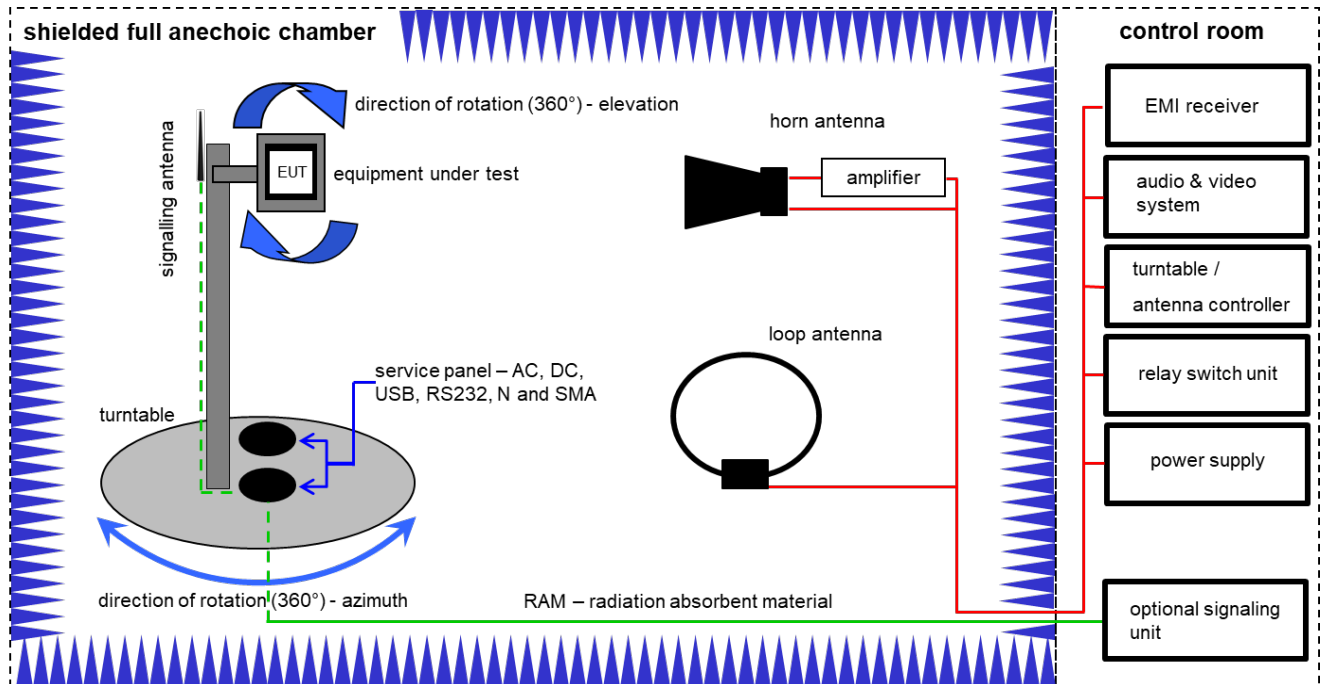

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (71.61 } \mu\text{V/m)}$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	B, C	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vKI!	10.10.2023	31.10.2025
2	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	02.08.2023	31.08.2025
3	B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
4	B, C	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
5	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
6	A, B, C	Computer	Intel Core i3 3220/3,3 GHz, Prozessor		2V2403033A5421	300004591	ne	-/-	-/-
7	C	Highpass Filter	WHKX2.6/18G-10SS	Wainwright	12	300004651	ne	-/-	-/-
8	A, B, C	NEXIO EMV-Software	BAT EMC V2022.0.32.0	Nexio		300004682	ne	-/-	-/-
9	B	Band Reject Filter	WRCJV12-5120-5150-5350-5380-40SS	Wainwright	5	300005168	ev	-/-	-/-
10	B	Band Reject Filter	WRCJV12-5695-5725-5850-5880-40SS	Wainwright	5	300005169	ev	-/-	-/-
11	B	Band Reject Filter	WRCJV16-5440-5470-5725-5755-40SS	Wainwright	9	300005170	ev	-/-	-/-
12	B	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011571	300005240	ev	-/-	-/-
13	A, B, C	Signal analyzer	FSW26	Rohde&Schwarz	101371	300005697	k	07.12.2023	31.12.2024

7.3 Radiated measurements > 18 GHz

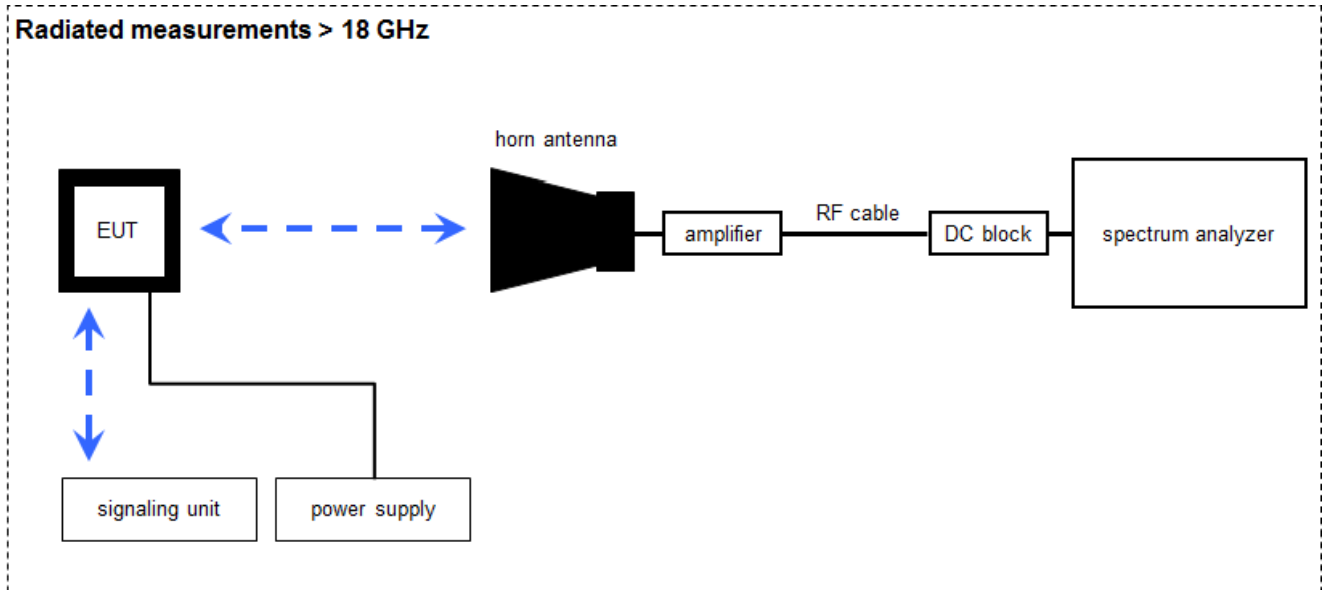

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:


$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB/m]} = 16.64 \text{ [dB}\mu\text{V/m]} \text{ (6.79 } \mu\text{V/m)}$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Horn Antenna 18,0-40,0 GHz	LHAF180	Microw.Devel	39180-103-021	300001747	vKI!	17.01.2022	31.01.2024
2	A	Broadband LNA 18-50 GHz	CBL18503070PN	CERNEX	25240	300004948	ev	09.03.2022	08.03.2024
3	A	Signal- and Spectrum Analyzer 2 Hz - 50 GHz	FSW50	Rohde&Schwarz	101560	300006179	k	04.04.2023	30.04.2024

7.4 Conducted measurements with peak power meter & spectrum analyzer

Conducted measurements normal conditions

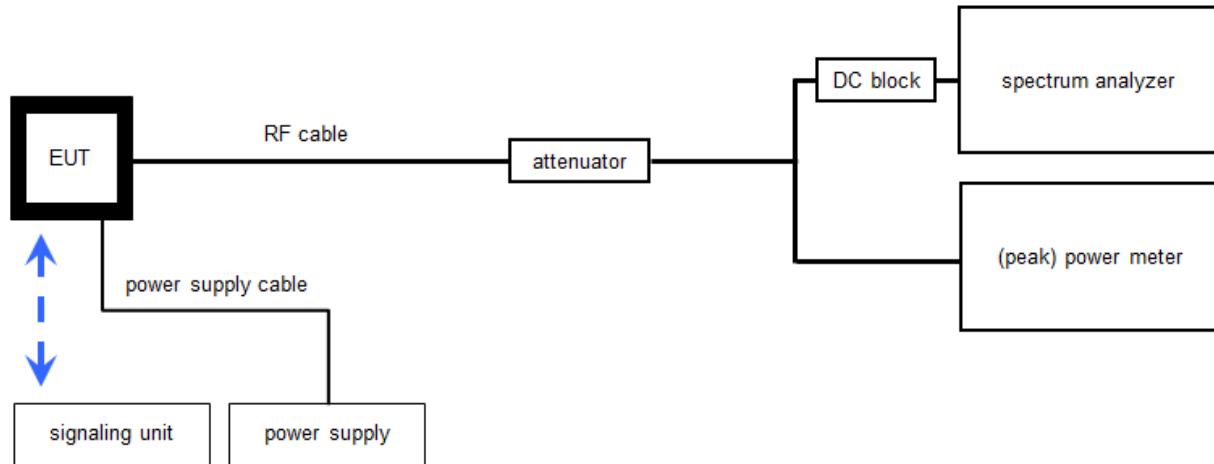

WLAN tester version: 1.1.13; LabView2015

OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)


Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Meßkabine 3 - Halle D2	HF-Schirmkabine	MWB Messwandler Bau AG 300023		300000557	ne	-/-	-/-
2	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	06.12.2023	31.12.2024
3	A	RF-Cable	ST18/SMAm/SMAm/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
4	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
5	A	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev	-/-	-/-
6	A	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits		400001186	ev	-/-	-/-
7	A	Tester Software RadioStar (C.BER2 for BT Conformance)	Version 1.0.0.X	CTC advanced GmbH	0001	400001380	ne	-/-	-/-

7.5 AC conducted

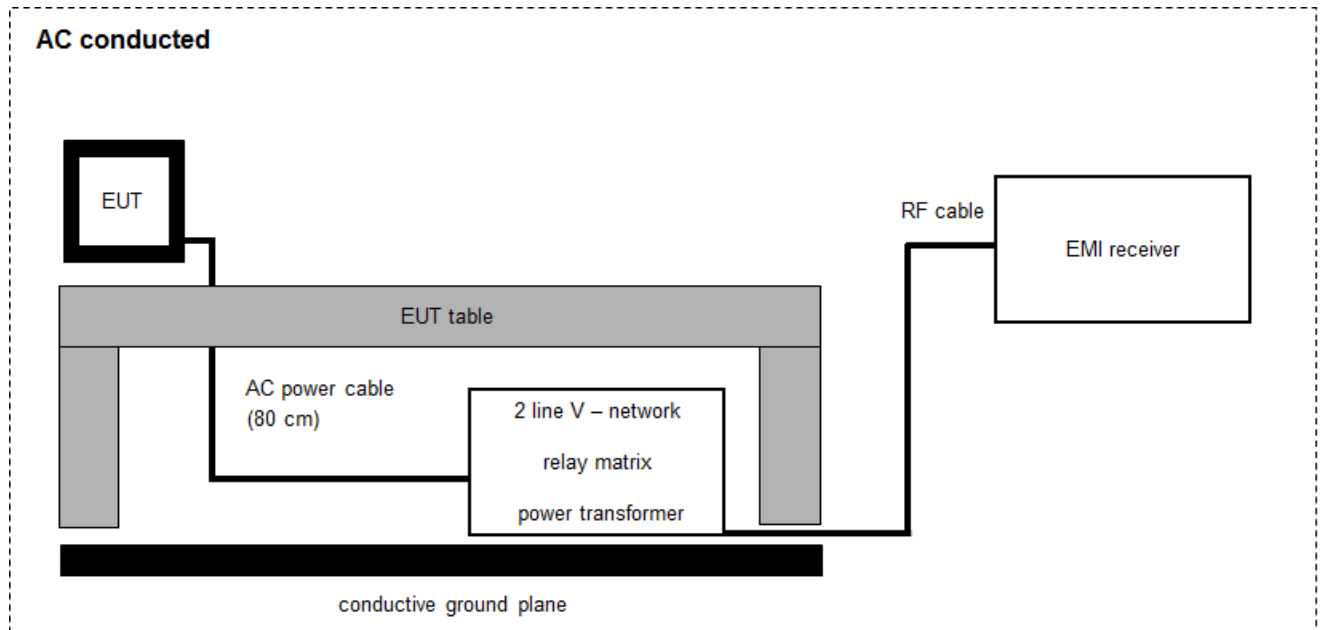

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 37.62 \text{ [dB}\mu\text{V/m]} + 9.90 \text{ [dB]} + 0.23 \text{ [dB]} = 47.75 \text{ [dB}\mu\text{V/m]} \text{ (244.06 } \mu\text{V/m)}$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	Rohde & Schwarz	892475/017	300002209	vKI!	12.12.2023	31.12.2025
2	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
3	A	PC	TecLine	F+W		300003532	ne	-/-	-/-
4	A	Analyzer-Impedance-System	AI516/1	Spitzenberger + Spies GmbH & Co. KG	UO2076 07/0 1023	400001751	k	19.10.2023	31.10.2025
5	A	EMI Test Receiver 3.6 GHz	ESR3	Rohde & Schwarz	102981	300006318	k	08.12.2023	31.12.2024

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.56 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.56 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.56 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

10 Summary of measurement results

☒	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☐	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Title 47 Part 15	See table	2024-03-19	-/-

Test specification clause	Test case	C	NC	NA	NP	Remark
-/-	Output power verification (cond.)	-/-				Declared
-/-	Antenna gain	-/-				Declared
U-NII Part 15	Duty cycle	-/-				-/-
§15.407(a)	Maximum output power (conducted & radiated)	☒	☐	☐	☐	-/-
§15.407(a)	Power spectral density	☒	☐	☐	☐	-/-
RSS - 247 (6.2.4.1)	Spectrum bandwidth 6dB bandwidth	☒	☐	☐	☐	-/-
§15.407(a)	Spectrum bandwidth 26dB bandwidth	☒	☐	☐	☐	-/-
RSS Gen clause 6.6	Spectrum bandwidth 99% bandwidth	-/-				-/-
§15.205	Band edge compliance radiated	☒	☐	☐	☐	-/-
§15.407(b)	TX spurious emissions radiated	☒	☐	☐	☐	-/-
§15.109	RX spurious emissions radiated	☒	☐	☐	☐	-/-
§15.209(a)	Spurious emissions radiated < 30 MHz	☒	☐	☐	☐	-/-
§15.107(a) §15.207	Spurious emissions conducted emissions< 30 MHz	☒	☐	☐	☐	-/-
§15.407	DFS	-/-				See report 1-7077_23-01-06_TR1_R1

Notes:

C:	Compliant	NC:	Not compliant	NA:	Not applicable	NP:	Not performed
----	-----------	-----	---------------	-----	----------------	-----	---------------

11 Additional comments

Reference documents:	DFS report: 1-7077_23-01-06_TR1_R1 DCIW377DISH - WiFi test commands.docx 24-01-08_Antenna Drawing DCIW377DISH.pptx DCIW377 DISH - Op_Desc.pptx
Co-applicable documents :	1-7077/23-01-05_TR1-A201.pdf (a-mode) 1-7077/23-01-05_TR1-A202.pdf (n20-mode) 1-7077/23-01-05_TR1-A203.pdf (ac20-mode) 1-7077/23-01-05_TR1-A204.pdf (ax20-mode) 1-7077/23-01-05_TR1-A205.pdf (n40-mode) 1-7077/23-01-05_TR1-A206.pdf (ac40-mode) 1-7077/23-01-05_TR1-A207.pdf (ax40-mode) 1-7077/23-01-05_TR1-A208.pdf (ac80-mode) 1-7077/23-01-05_TR1-A209.pdf (ax80-mode)
Special test descriptions:	The DUT has been configured using “accessMTool” software version 3.1.0.3.
Configuration descriptions:	All tests were performed with both chains active. SISO modes are not supported.

Provided channels and used power settings for all modes:

a-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	36	40	44	48	52	56	60	64
f _c / MHz	5180	5200	5220	5240	5260	5280	5300	5320
Power setting *)	70	78	-/-	78	78	78	-/-	72

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	100	104	108	112	116	120	124	128	132	136	140
f _c / MHz	5500	5520	5540	5560	5580	5600	5620	5640	5660	5680	5700
Power setting *)	70	-/-	-/-	-/-	-/-	76	-/-	-/-	-/-	-/-	76

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	149	153	157	161	165
f _c / MHz	5745	5765	5785	5805	5825
Power setting *)	80	-/-	80	-/-	80

nHT20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	36	40	44	48	52	56	60	64
f _c / MHz	5180	5200	5220	5240	5260	5280	5300	5320
Power setting *)	72	78	-/-	78	80	80	-/-	72

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	100	104	108	112	116	120	124	128	132	136	140
f _c / MHz	5500	5520	5540	5560	5580	5600	5620	5640	5660	5680	5700
Power setting *)	71	-/-	-/-	-/-	-/-	78	-/-	-/-	-/-	-/-	80

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	149	153	157	161	165
f _c / MHz	5745	5765	5785	5805	5825
Power setting *)	80	-/-	80	-/-	80

acVHT20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	36	40	44	48	52	56	60	64
f _c / MHz	5180	5200	5220	5240	5260	5280	5300	5320
Power setting *)	72	78	-/-	78	80	80	-/-	72

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	100	104	108	112	116	120	124	128	132	136	140
f _c / MHz	5500	5520	5540	5560	5580	5600	5620	5640	5660	5680	5700
Power setting *)	71	-/-	78	-/-	-/-	78	-/-	-/-	-/-	-/-	80

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	149	153	157	161	165
f _c / MHz	5745	5765	5785	5805	5825
Power setting *)	80	-/-	80	-/-	80

axHE20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	36	40	44	48	52	56	60	64
f _c / MHz	5180	5200	5220	5240	5260	5280	5300	5320
Power setting *)	71	80	-/-	76	80	80	-/-	66

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	100	104	108	112	116	120	124	128	132	136	140
f _c / MHz	5500	5520	5540	5560	5580	5600	5620	5640	5660	5680	5700
Power setting *)	72	-/-	-/-	-/-	-/-	80	-/-	-/-	-/-	-/-	80

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	149	153	157	161	165
f _c / MHz	5745	5765	5785	5805	5825
Power setting *)	80	-/-	80	-/-	80

nHT40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	38	46	54	62
f _c / MHz	5190	5230	5270	5310
Power setting *)	69	76	76	61

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency				
channel	102	110	118	126
f _c / MHz	5510	5550	5590	5630
Power setting *)	64	-/-	76	-/-

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency			
channel	151	159	
f _c / MHz	5755	5795	
Power setting *)	80	80	

acVHT40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	38	46	54	62
f _c / MHz	5190	5230	5270	5310
Power setting *)	59	76	76	58

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency				
channel	102	110	118	126
f _c / MHz	5510	5550	5590	5630
Power setting *)	64	-/-	76	-/-

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency			
channel	151	159	
f _c / MHz	5755	5795	
Power setting *)	76	76	

axHE40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	38	46	54	62
f _c / MHz	5190	5230	5270	5310
Power setting *)	57	76	76	58

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency					
channel	102	110	118	126	134
f _c / MHz	5510	5550	5590	5630	5670
Power setting *)	72	-/-	80	-/-	80

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency		
channel	151	159
f _c / MHz	5755	5795
Power setting *)	80	80

acVHT80-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency		
channel	42	58
f _c / MHz	5210	5290
Power setting *)	57	58

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency			
channel	106	122	138
f _c / MHz	5530	5610	5690
Power setting *)	58	80	80

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency	
channel	155
f _c / MHz	5775
Power setting *)	72

axHE80-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency		
channel	42	58
f _c / MHz	5210	5290
Power setting *)	56	57

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency			
channel	106	122	138
f _c / MHz	5530	5610	5690
Power setting *)	55	76	76

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency	
channel	155
f _c / MHz	5775
Power setting *)	72

- EUT selection:
- ☒ Only one device available
 - ☐ Devices selected by the customer
 - ☐ Devices selected by the laboratory (Randomly)

- Test mode:
- ☐ No test mode available.
Iperf is used to transmit data to a companion device
 - ☒ Special software is used.
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

- ☐ Operating mode 1 (single antenna)
 - Equipment with 1 antenna,
 - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
 - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
- ☒ Operating mode 2 (multiple antennas, no beamforming)
 - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
- ☐ Operating mode 3 (multiple antennas, with beamforming)
 - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

12 Measurement results

12.1 Identify worst case data rate

Worst case data rates declared by the manufacturer:

OFDM – mode	Modulation scheme / bandwidth					
	U-NII-1 & U-NII-2A		U-NII-2C		U-NII-3	
	lowest channel	highest channel	lowest channel	highest channel	lowest channel	highest channel
a – mode	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s
n HT20 – mode	MCS8	MCS8	MCS8	MCS8	MCS8	MCS8
ac VHT20 – mode	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2
ax HE20 – mode	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2
n HT40 – mode	MCS8	MCS8	MCS8	MCS8	MCS8	MCS8
ac VHT40 – mode	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2
ax HE40 – mode	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2
ac VHT80 – mode	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2	MCS0NN2
ax HE80 – mode	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2

12.2 Antenna gain

Description:

The antenna gain is declared by customer. Referenced information and antenna patterns can be found in "24-01-08_Antenna Drawing DCIW377DISH.pptx".

Limits:

Antenna Gain
6 dBi / > 6 dBi output power and power density reduction required

Results:

U-NII-1 (5150 MHz to 5250 MHz)	Peak Antenna Gain ANT 0	Peak Antenna Gain ANT 1	Combined Antenna gain
Gain / dBi (declared)	0.3	-0.3	3.0

U-NII-2A (5250 MHz to 5350 MHz)	Peak Antenna Gain ANT 0	Peak Antenna Gain ANT 1	Combined Antenna gain
Gain / dBi (declared)	0.3	-0.3	3.0

U-NII-2C (5470 MHz to 5725 MHz)	Peak Antenna Gain ANT 0	Peak Antenna Gain ANT 1	Combined Antenna gain
Gain / dBi (declared)	-0.5	1.6	2.0

U-NII-3 (5725 MHz to 5850 MHz)	Peak Antenna Gain ANT 0	Peak Antenna Gain ANT 1	Combined Antenna gain
Gain / dBi (declared)	-0.5	1.6	2.0

12.3 Duty cycle

Description:

The duty cycle is necessary to compute the maximum power during an actual transmission. The shown plots and values are to show an example of the measurement procedure. The real value is measured direct during the power measurement or power density measurement. The correction value is shown in each plot of these measurements.

Measurement:

Measurement parameter	
According to: KDB789033 D02, B.	
External result file(s)	1-7077/23-01-05_TR1-A201 to A209 FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.4 – A
Measurement uncertainty:	See chapter 9

Results:

Duty cycle and correction factor:

OFDM – mode	Calculation method			
	$T_{on} (D2_{plot}) * 100 / T_{complete} (D3_{plot}) = \text{duty cycle}$ $10 * \log(\text{duty cycle}) = \text{correction factor}$			
	$T_{on} (D2_{plot})$	$T_{complete} (D3_{plot})$	Duty cycle	Correction factor
a – mode	-/-	-/-	100%	0dB
n HT20 – mode	-/-	-/-	100%	0dB
ac VHT20 – mode	-/-	-/-	100%	0dB
ax HE20 – mode	-/-	-/-	100%	0dB
n HT40 – mode	-/-	-/-	100%	0dB
ac VHT40 – mode	-/-	-/-	100%	0dB
ax HE40 – mode	-/-	-/-	100%	0dB
ac VHT80 – mode	-/-	-/-	100%	0dB
ax HE80 – mode	-/-	-/-	100%	0dB

12.4 Maximum output power

12.4.1 Maximum output power according to FCC requirements

Description:

Measurement of the maximum output power conducted

Measurement:

Measurement parameter	
According to: KDB789033 D02, E.2.e.	
External result file(s)	1-7077/23-01-05_TR1-A201 to A209 FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.4 A
Measurement uncertainty:	See chapter 9
Standard parts:	FCC: § 15.407 (a)

Limits:

Limits	
Radiated output power	Conducted output power
Band 5150 MHz – 5250 MHz	
For an outdoor access point: Conducted power + 6 dBi antenna gain For an indoor access point: Conducted power + 6 dBi antenna gain For fixed point-to-point access points Conducted power + 23 dBi antenna gain For client devices Conducted power + 6 dBi antenna gain (If the Antenna gain is greater than the Limit: 1dB reduction in the max. conducted output power for each 1 dB of antenna gain in excess of the Limit)	For an outdoor access point: output power $\leq 1\text{W}/30\text{dBm}$ The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm) For an indoor access point output power $\leq 1\text{W}/30\text{dBm}$ For fixed point-to-point access points output power $\leq 1\text{W}/30\text{dBm}$ For client devices output power $\leq 250\text{ mW}/24\text{dBm}$
Band 5250MHz – 5350 MHz	
Conducted power + 6 dBi antenna gain (Antenna gain higher than the Limit: 1dB reduction in the max. conducted output power for each 1 dB of antenna gain in excess of the Limit)	Output power $\leq$ lesser of 250mW or 11dBm +10logB (B is the 26 dB emission bandwidth in megahertz)
Band 5470MHz – 5725 MHz	
Conducted power + 6 dBi antenna gain (Antenna gain higher than the Limit: 1dB reduction in the max. conducted output power for each 1 dB of antenna gain in excess of the Limit)	Output power $\leq$ lesser of 250mW or 11dBm +10logB (B is the 26 dB emission bandwidth in megahertz)
Band 5725MHz – 5850 MHz	
Conducted power + 6 dBi antenna gain (Antenna gain higher than the Limit: 1dB reduction in the max. conducted output power for each 1 dB of antenna gain in excess of the Limit Exception: fixed point-to-point U-NII devices, no corresponding reduction in transmitter conducted power)	output power $\leq 1\text{W}/30\text{dBm}$

Results:

802.11a Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
SUM	21.3	22.6	22.0	22.4	22.2	20.8	21.3	20.9	22.1	23.6	23.2	22.7

802.11nHT20 Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
SUM	21.6	22.7	22.3	22.9	22.6	21.0	21.5	22.8	23.0	23.7	23.4	22.8

802.11ac VHT20 Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
SUM	21.5	22.7	21.9	22.8	22.6	20.9	21.5	22.7	23.0	23.4	23.2	22.6

802.11ax20 Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
SUM	21.4	23.2	22.2	22.8	22.6	19.7	21.9	23.1	22.9	23.6	23.3	22.7

Results:

802.11 n HT40 Maximum output power [dBm]									
Channel	38	46	54	62	102	118	142	151	159
SUM	18.4	22.4	22.6	18.3	19.6	23.2	23.1	23.3	22.9

802.11 ac VHT40 Maximum output power [dBm]									
Channel	38	46	54	62	102	118	134	151	159
SUM	19.2	22.6	22.9	18.4	20.7	23.5	23.3	23.6	23.1

802.11 ax HE40 Maximum output power [dBm]									
Channel	38	46	54	62	102	118	142	151	159
SUM	18.4	22.4	22.6	18.3	19.6	23.2	23.1	22.3	22.9

802.11 ac VHT80 Maximum output power [dBm]						
Channel	42	58	106	122	138	155
SUM	18.9	18.9	19.8	23.8	23.8	24.3

802.11 ax HE80 Maximum output power [dBm]						
Channel	42	58	106	122	138	155
SUM	19.0	18.8	19.3	23.8	23.6	25.2

12.5 Power spectral density

12.5.1 Power spectral density according to FCC requirements

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to: KDB789033 D02, F.	
External result file(s)	1-7077/23-01-05_TR1-A201 to A209 FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.4 A
Measurement uncertainty:	See chapter 9
Standard parts:	FCC: § 15.407 (a)

Limits:

Power Spectral Density
Band 5150 MHz – 5250 MHz
For an outdoor access point power spectral density conducted ≤ 17 dBm in any 1 MHz band* For an indoor access point power spectral density conducted ≤ 17 dBm in any 1 MHz band* For fixed point-to-point access points power spectral density conducted ≤ 17 dBm in any 1 MHz band** For client devices point power spectral density conducted ≤ 11 dBm in any 1 MHz band* *If transmitting antennas of directional gain greater than 6 dBi are used the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi **Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
Band 5250MHz – 5350 MHz
power spectral density conducted ≤ 11 dBm in any 1 MHz band* *If transmitting antennas of directional gain greater than 6 dBi are used the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi
Band 5470MHz – 5725 MHz
power spectral density conducted ≤ 11 dBm in any 1 MHz band* *If transmitting antennas of directional gain greater than 6 dBi are used the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi
Band 5725MHz – 5850 MHz
power spectral density conducted ≤ 30 dBm in any 500 kHz band If transmitting antennas of directional gain greater than 6 dBi are used the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

Results:

802.11 a Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
SUM	10.8	11.0	10.3	10.7	10.5	10.3	10.8	9.3	10.4	8.8	8.5	8.0

802.11 n HT20 Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
SUM	10.9	10.7	10.3	10.9	10.7	10.2	10.7	10.8	11.0	8.5	8.3	7.7

802.11 ac VHT20 Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
SUM	10.8	10.7	9.9	10.8	10.6	10.1	10.8	10.7	10.9	8.4	8.2	7.6

802.11ax HE20 Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
SUM	9.1	10.9	9.9	10.4	10.3	7.3	9.5	10.8	10.5	8.2	8.1	7.5

Results:

802.11 n HT40									
Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	134	151	159
SUM	8.2	7.8	8.0	5.7	7.1	8.5	8.5	5.8	5.5

802.11 ac VHT40									
Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	134	151	159
SUM	5.6	7.7	8.0	5.9	7.0	8.6	8.4	5.8	5.4

802.11ax HE40									
Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	134	151	159
SUM	3.4	7.2	7.5	3.3	4.5	8.1	8.0	5.3	5.0

802.11 ac VHT80						
Power spectral density [dBm/1MHz] or [dBm/500kHz]						
Channel	42	58	106	122	138	155
SUM	2.4	2.5	3.2	6.0	6.0	3.6

802.11ax HE80						
Power spectral density [dBm/1MHz] or [dBm/500kHz]						
Channel	42	58	106	122	138	155
SUM	1.2	1.2	1.3	5.9	5.7	4.4

12.6 Minimum emission bandwidth for the band 5.725-5.85 GHz

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to: KDB789033 D02, C.2.	
External result file(s)	1-7077/23-01-05_TR1-A201 to A209 FCC Part 15.407 & ISSED Minimum Emission BW
Used test setup:	See chapter 7.4 A
Measurement uncertainty:	See chapter 9

Limits:

FCC	-/-
The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:

a	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
Antenna 1	16.4	16.4	16.4
Antenna 2	16.4	16.3	16.3

n HT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
Antenna 1	17.6	17.6	17.6
Antenna 2	17.6	17.6	17.6

ac VHT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
Antenna 1	17.6	17.6	17.6
Antenna 2	17.6	17.6	17.6

ax HE20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
Antenna 1	19.0	19.1	19.0
Antenna 2	19.0	19.0	19.0

Results:

n HT40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
Antenna 1	36.4	36.3
Antenna 2	36.4	36.3

ac VHT40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
Antenna 1	36.4	36.3
Antenna 2	36.4	36.4

ax HE40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
Antenna 1	37.8	37.5
Antenna 2	37.6	37.3

ac VHT80	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Middle channel	
Antenna 1	75.8	
Antenna 2	75.2	

ax HE80	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Middle channel	
Antenna 1	77.0	
Antenna 2	75.2	

12.7 Spectrum bandwidth / 26 dB bandwidth

Description:

Measurement of the 26 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to: KDB789033 D02, C.1.	
External result file(s)	1-7077/23-01-05_TR1-A201 to A209 FCC Part 15.407 & ISSED Bandwidths
Used test setup:	see chapter 7.4 A
Measurement uncertainty:	See chapter 9

Limits:

Spectrum Bandwidth – 26 dB Bandwidth
FCC: Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

Results:

802.11a 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	21.85	34.25	35.95 ¹	35.85	35.15	23.15	21.5	23.05	30.20	34.28	33.92	34.80
Port 2	22.15	32.55	32.70 ¹	33.15	33.05	23.15	22.2	21.95	29.65	37.88	38.00	37.44

802.11n HT20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	26.35	39.75	40.45 ¹	43.65	44.2	22.70	24.25	39.15	35.85	38.52	38.52	39.64
Port 2	25.55	33.90	31.05 ¹	41.0	40.7	27.65	28.35	37.45	40.80	40.0	39.6	39.64

802.11ac VHT20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	28.45	40.95	37.6 ¹	42.35	42.10	25.9	25.70	40.35	40.0	39.88	39.92	39.48
Port 2	23.0	35.80	34.35 ¹	40.50	39.25	23.2	22.45	36.05	41.65	39.60	39.92	39.52

802.11ax HE20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	27.8	42.7	39.3 ¹	44.85	43.15	21.85	25.75	43.55	38.6	38.24	39.68	39.8
Port 2	22.6	41.1	31.45 ¹	39.3	45.1	21.7	28.4	42.7	39.05	40.0	39.88	39.08

¹ As per KDB 789033 D02 v02r01 the 99% bandwidth can be used in lieu of the 26dB bandwidth. The highest frequency measured with 99% measurement function is below 5250 MHz and falls completely within the U-NII-1 band.

Results:

802.11n HT40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	48.6	83.3 ¹	84.3	39.7	40.1	77.7	79.4	75.0	69.4
Port 2	39.4	59.4 ¹	67.3	39.4	39.5	64.9	65.3	67.8	64.9

802.11ac HT40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	39.8	85.1 ¹	84.3	39.9	39.9	76.2	72.7	78.3	70.6
Port 2	39.4	63.8 ¹	68.3	39.4	39.5	68.4	62.6	68.8	76.3

802.11ax HE40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	40.4	75.2 ¹	80.8	40.2	40.3	71.4	60.2	62.6	62.6
Port 2	40.0	66.5 ¹	66.2	40.0	40.1	69.4	71.6	70.4	68.6

802.11ac VHT80 26 dB bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	81.0 ¹	81.4	81.8	181.6	160.6	159.2 ²
Port 2	80.8 ¹	81.2	81.0	167.8	159.8	160.0 ²

802.11ax HE80 26 dB bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	82.0 ¹	82.0	81.8	135.4	119.2	149.6 ²
Port 2	81.6 ¹	81.4	81.6	116.2	117.4	158.4 ²

¹ As per KDB 789033 D02 v02r01 the 99% bandwidth can be used in lieu of the 26dB bandwidth. The highest frequency measured with 99% measurement function is below 5250 MHz and falls completely within the U-NII-1 band.

² The 26dB emission bandwidth does extend the 5725 – 5850 MHz band. Therefore the 20dB bandwidth was measured to show compliance with §15.215 (c). The 20dB bandwidth is reported 23-1-0068401T004a-A6j and compliant with the §15.215 (c) requirement.

12.8 Occupied bandwidth / 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
External result file(s)	1-7077/23-01-05_TR1-A201 to A209 FCC Part 15.407 & ISSED Bandwidths
Test setup:	See sub clause 7.4 A
Measurement uncertainty:	See chapter 9

Usage:

-/-	-/-
OBW is necessary for Emission Designator	

Results:

802.11a 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	17.13	19.23	19.23	20.08	19.68	17.23	17.03	17.43	17.58	19.23	18.93	19.58
Port 2	17.03	17.83	17.93	18.38	18.53	17.23	17.13	17.28	17.83	20.88	20.52	20.23

802.11n HT20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	18.38	19.83	19.63	22.03	22.43	18.08	18.18	19.73	19.23	19.83	19.63	19.93
Port 2	18.03	18.78	18.63	19.88	20.08	18.33	18.08	19.08	19.53	20.93	21.23	20.53

802.11ac VHT20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	18.38	19.93	19.2	21.88	21.88	18.33	18.28	19.48	19.18	20.03	19.63	20.18
Port 2	18.08	18.73	18.4	19.78	19.93	18.03	18.08	19.18	19.68	21.43	21.23	20.93

802.11ax HE20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	19.38	20.38	19.58	21.13	21.63	19.23	19.38	20.03	19.63	19.83	19.83	20.0
Port 2	19.23	19.70	19.38	19.88	20.18	19.18	19.33	19.93	19.83	21.03	21.28	20.78

Results:

802.11n HT40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	36.6	38.5	40.2	36.3	36.5	37.5	37.2	37.2	36.9
Port 2	36.3	36.6	36.8	36.2	36.3	36.8	36.7	37.2	36.8

802.11ac VHT40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	36.4	39.0	40.8	36.3	36.5	37.7	37.2	37.2	37.2
Port 2	36.2	36.6	36.9	36.1	36.3	36.8	36.7	36.8	37.0

802.11ax HE40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	37.7	38.3	37.9	37.7	37.7	38.1	38.1	38.0	37.8
Port 2	37.6	38.3	38.5	37.6	37.7	38.0	38.0	38.0	38.1

802.11ac VHT80 99% bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	75.7	75.5	75.7	81.3	77.3	79.9
Port 2	75.5	75.5	75.5	78.7	77.5	91.9

802.11ax HE80 99% bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	76.9	77.1	77.3	77.7	77.7	78.5
Port 2	77.1	77.3	77.3	77.7	77.5	85.3

12.9 Undesirable emissions for transmitters operating in the 5725 MHz to 5850 MHz band (conducted)

Description:

Measurement of the spectrum mask as per FCC Part 15.407 (b)(4) and KDB 789033 II.G.2 (c) (ii).
The measurement is repeated at the lowest, middle and highest channel and performed in a conducted way as defined in KDB 789033 II.G.3 (b).

The highest antenna gain is considered and was added to the Reference Level Offset.
Emission levels are further adjusted to consider the number of antenna outputs (2).

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	$\geq 3 \times \text{RBW}$
Span:	See plots!
Trace mode:	Max Hold
Test setup:	See sub clause 7.4 A
Measurement uncertainty:	See chapter 9
External result file(s)	1-7077/23-01-05_TR1-A201 to A209 FCC 15.407, ISED RSS247 # Emission mask (eirp)

Limits:

FCC Part 15.407 (b)(4)
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Results:

Plots can be found in the referenced external result files.

12.10 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3m.

Measurement:



Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	$\geq 3 \times \text{RBW}$
Span:	See plots!
Trace mode:	Max Hold
Test setup:	See sub clause 7.2 – C
Measurement uncertainty:	See chapter 9

Limits:


Band Edge Compliance Radiated
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
74 dB μ V/m (peak) 54 dB μ V/m (average)

Result:


Scenario	Band Edge Compliance Radiated [dB μ V/m]
band edge	< 74 dB μ V/m (peak) < 54 dB μ V/m (average)

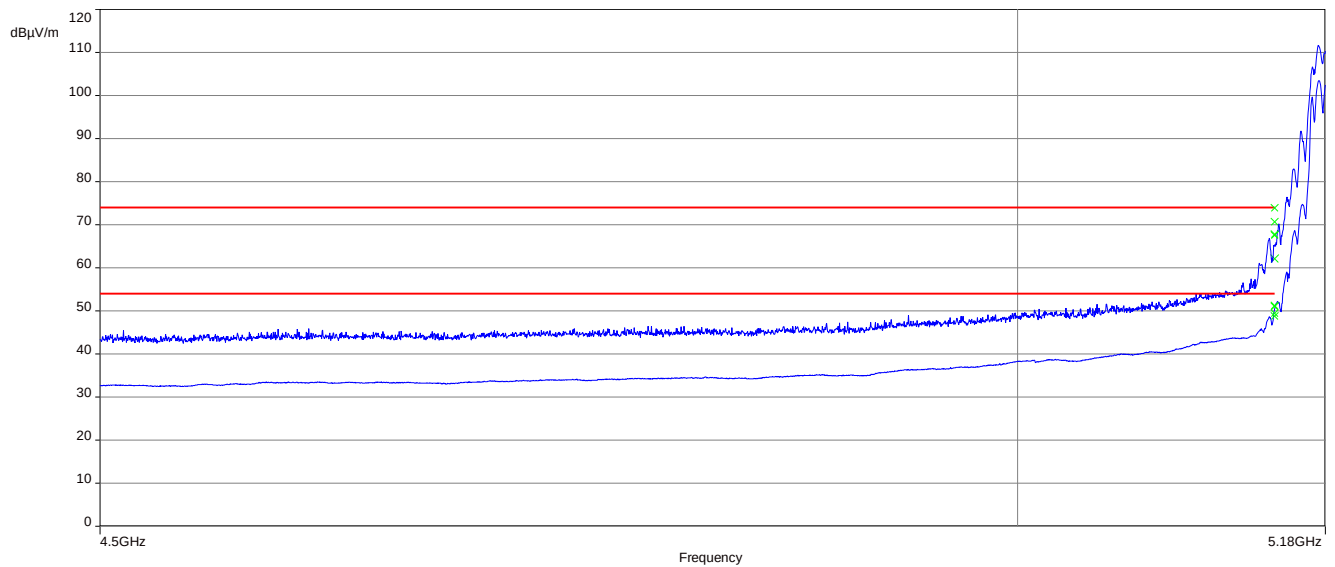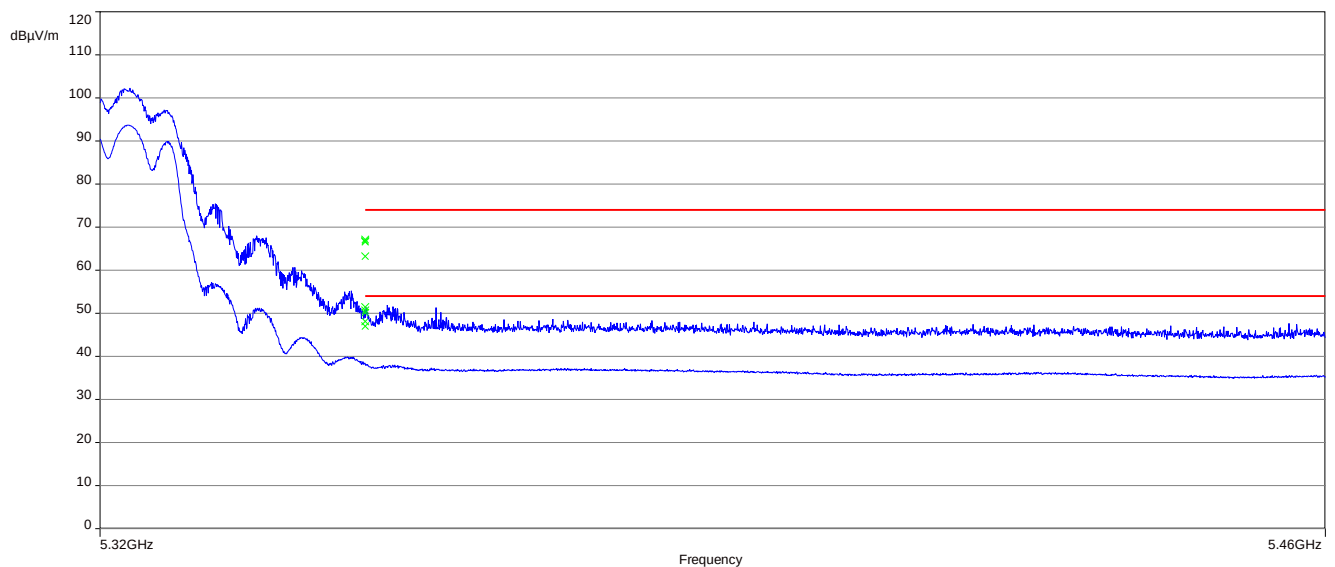Plots:**Plot 1:** lower band edge; U-NII-1; lowest channel; a-mode**Plot 2:** upper band edge; U-NII-2A; highest channel; a-mode


Plot 3: lower band edge; U-NII-2C; lowest channel; a-mode

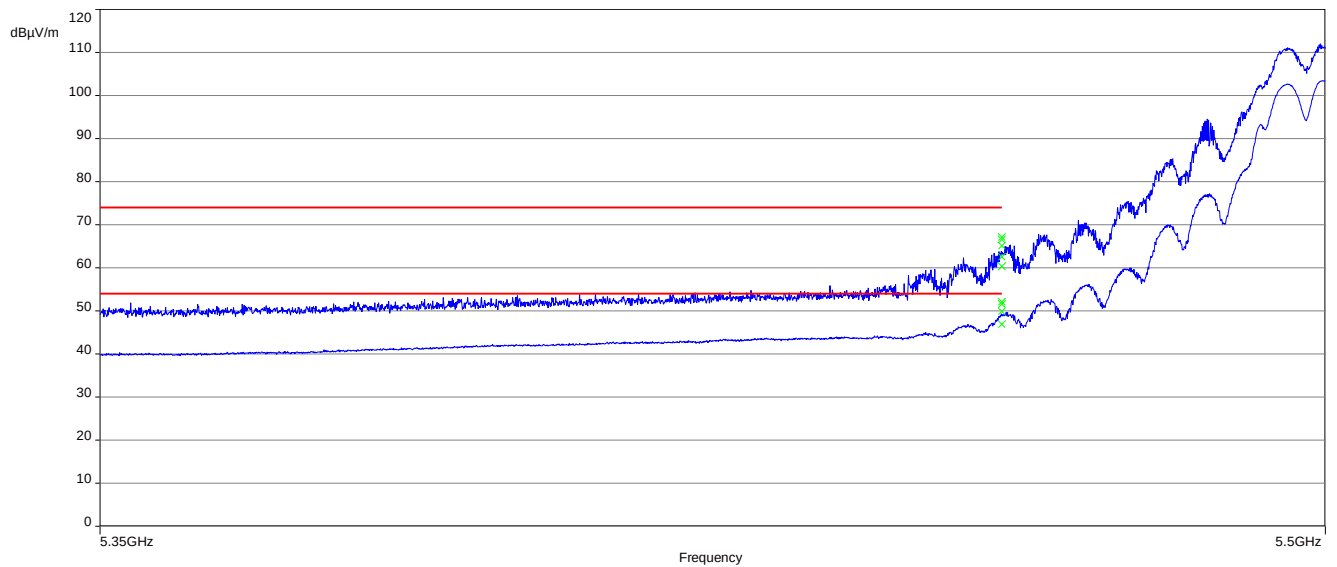


Plot 4: lower band edge; U-NII-1; lowest channel; n20-mode

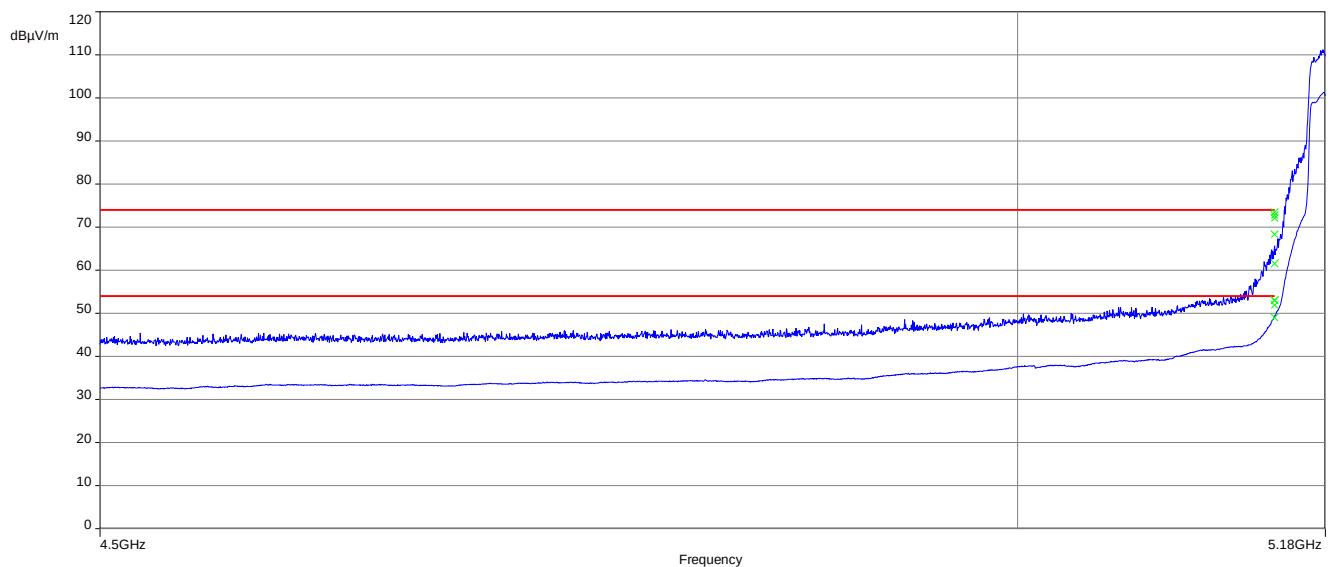


Plot 5: upper band edge; U-NII-2A; highest channel; n20-mode

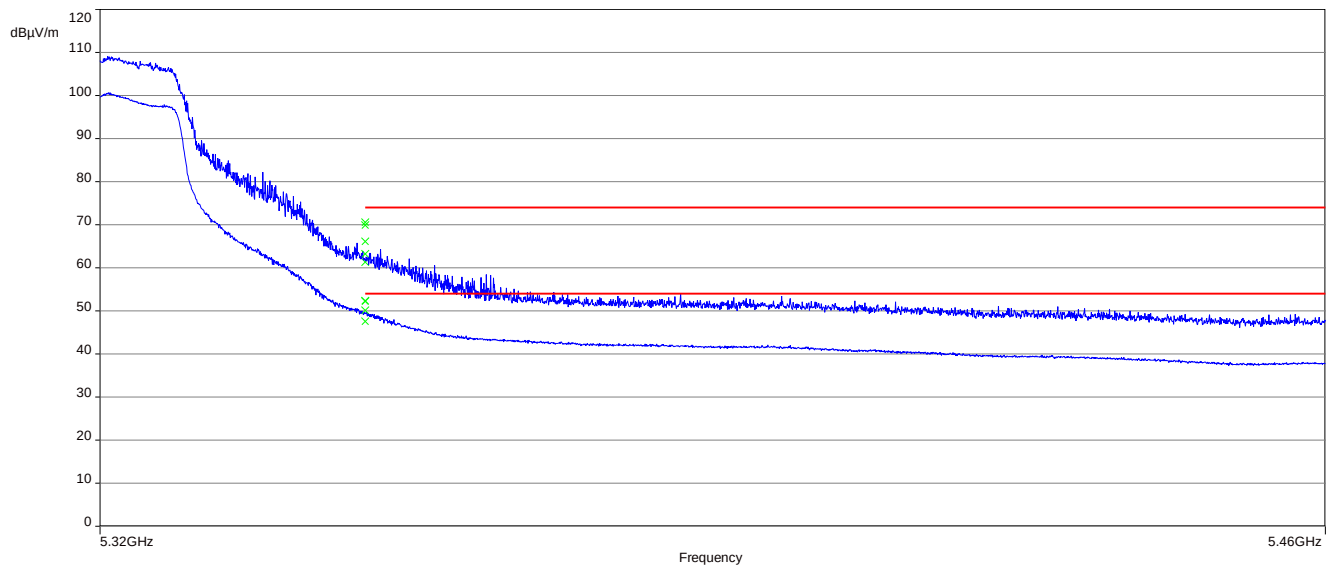


Plot 6: lower band edge; U-NII-2C; lowest channel; n20-mode

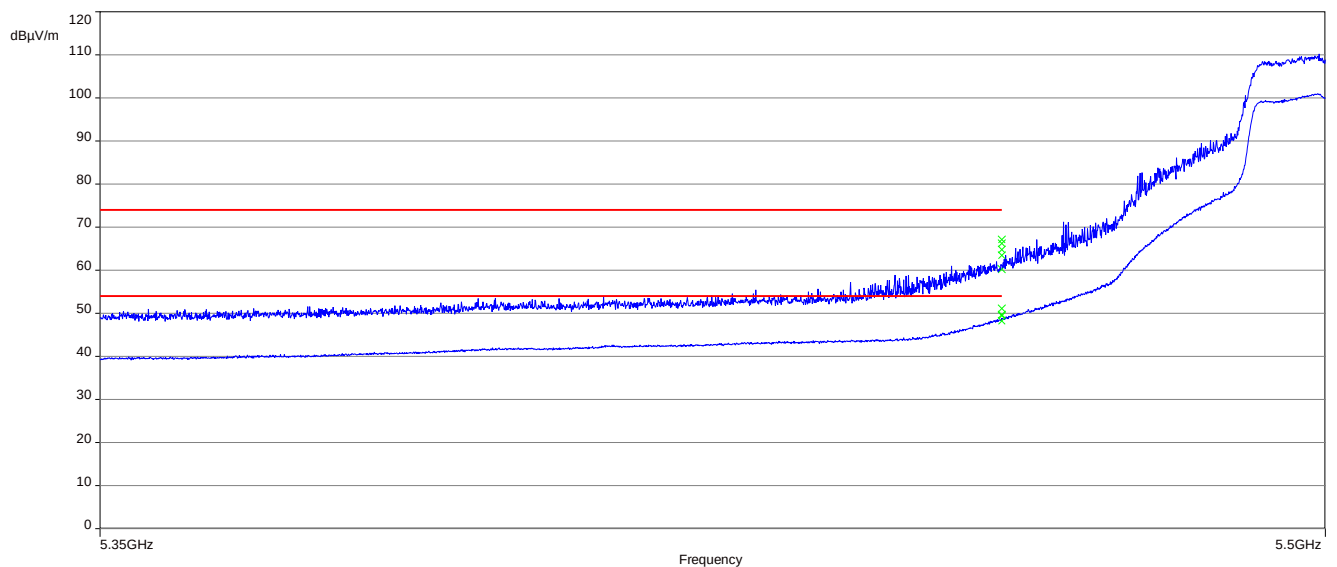


Plot 7: lower band edge; U-NII-1; lowest channel; ac20-mode

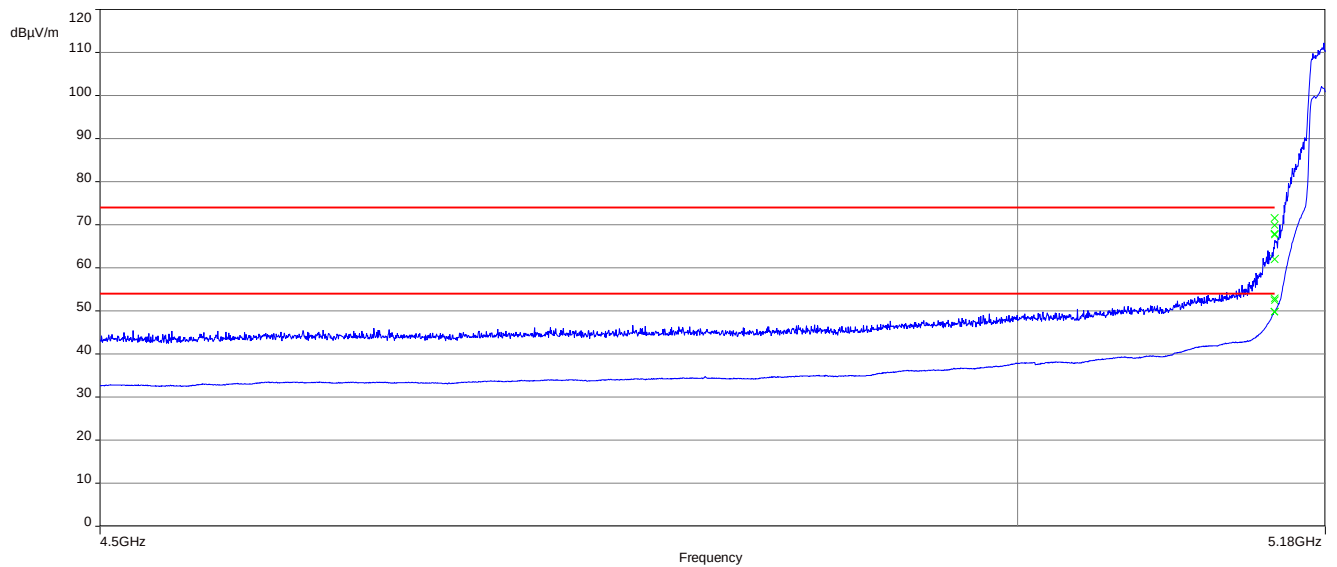


Plot 8: upper band edge; U-NII-2A; highest channel; ac20-mode

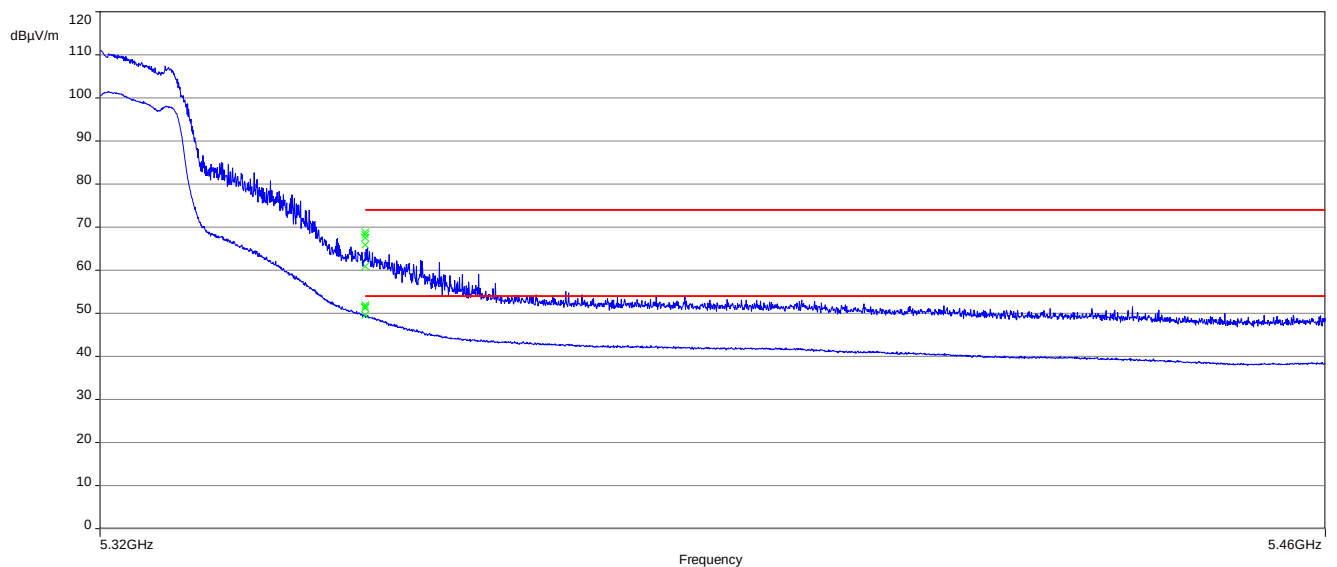


Plot 9: lower band edge; U-NII-2C; lowest channel; ac20-mode

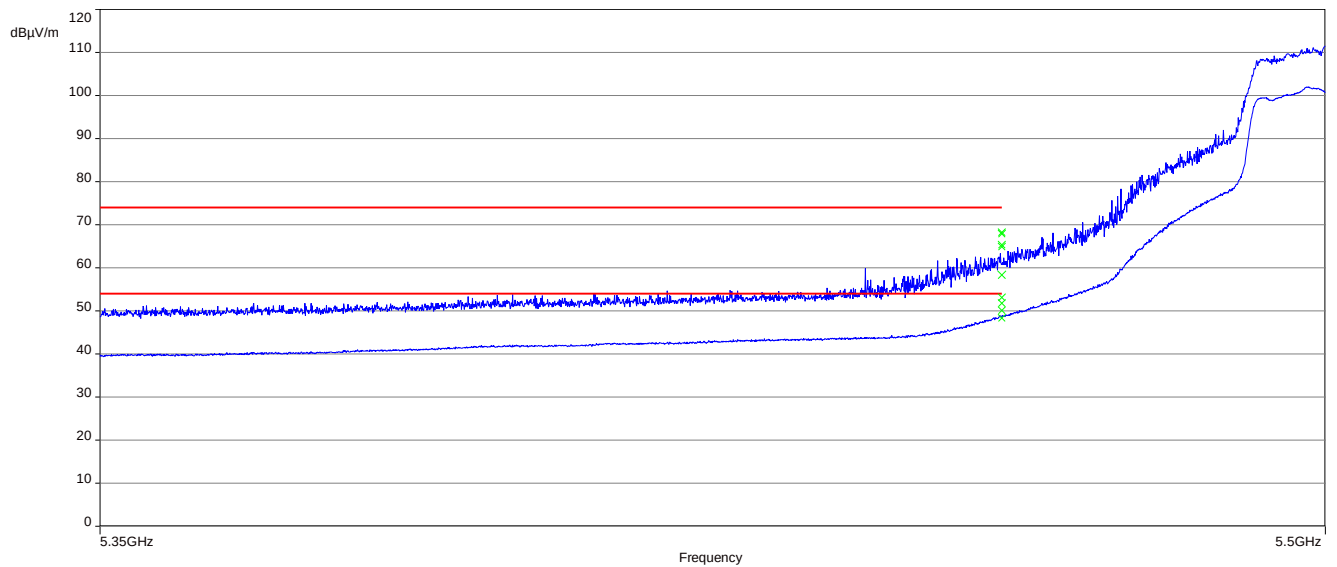


Plot 10: lower band edge; U-NII-1; lowest channel; ax20-mode

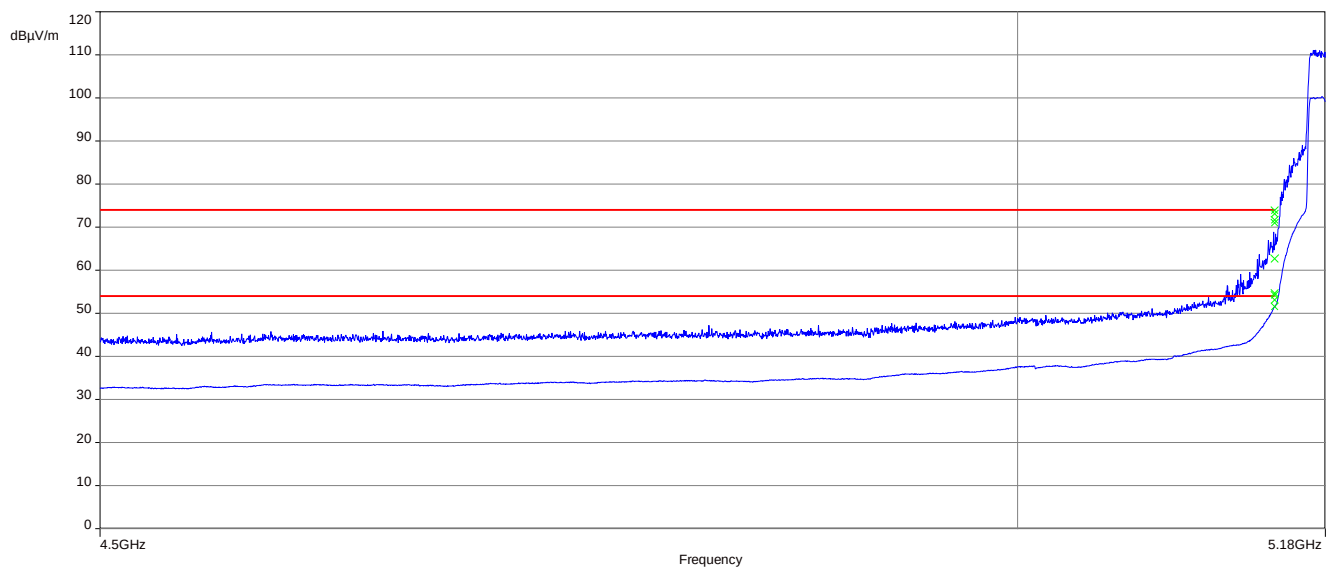


Plot 11: upper band edge; U-NII-2A; highest channel; ax20-mode

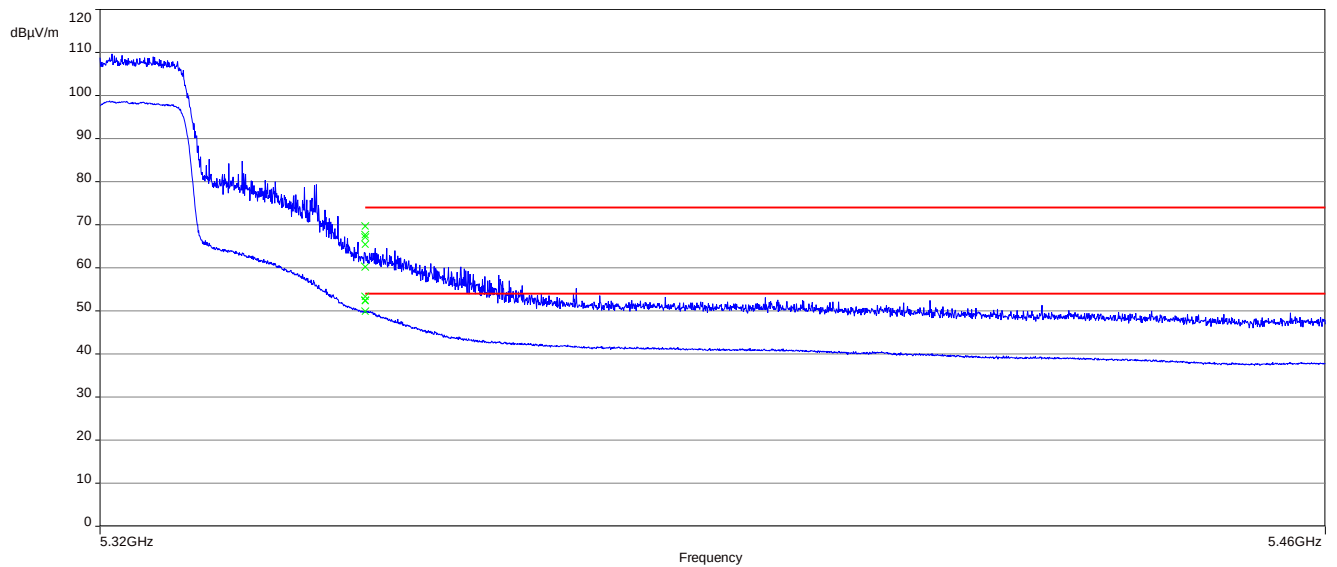


Plot 12: lower band edge; U-NII-2C; lowest channel; ax20-mode

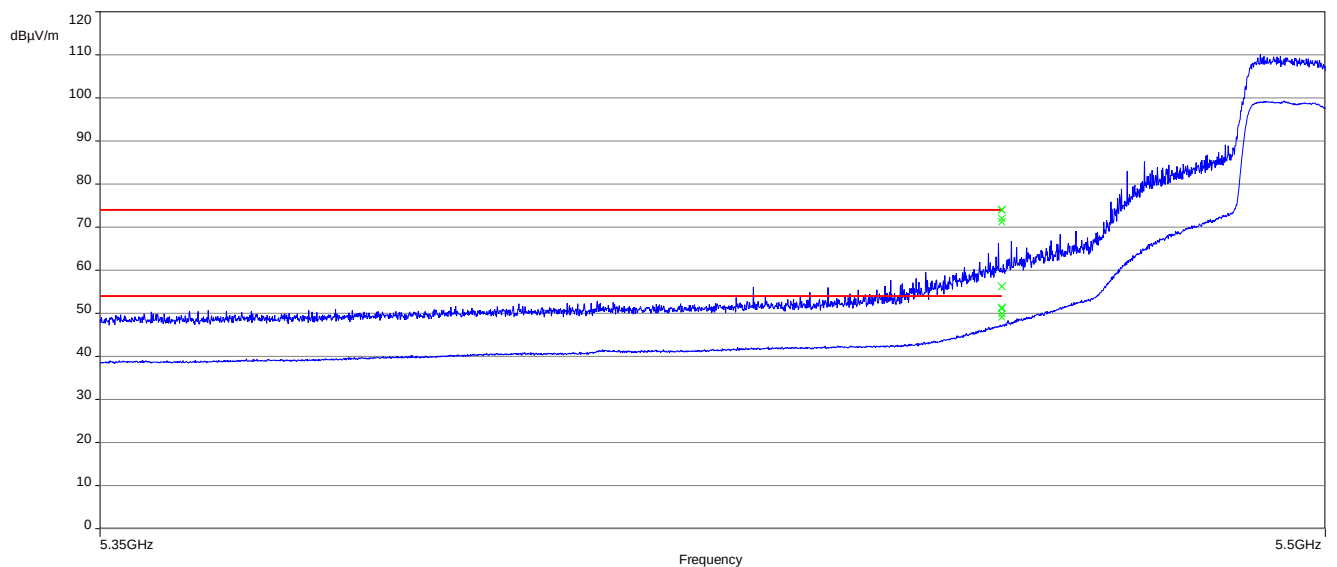


Plot 13: lower band edge; U-NII-1; lowest channel; n40-mode

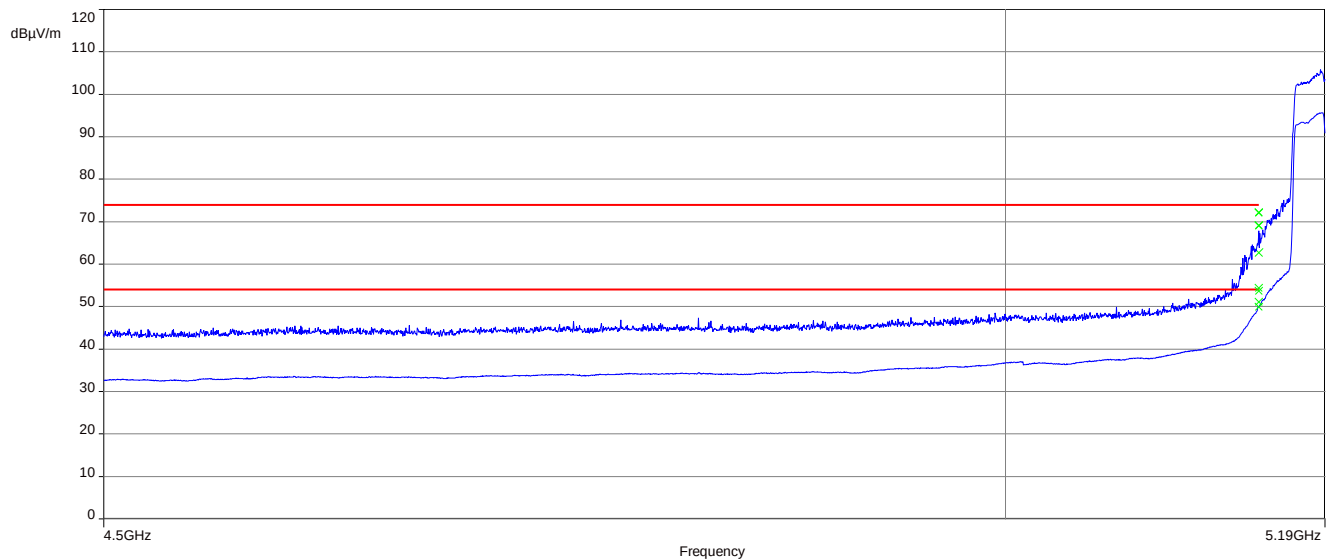


Plot 14: upper band edge; U-NII-2A; highest channel; n40-mode

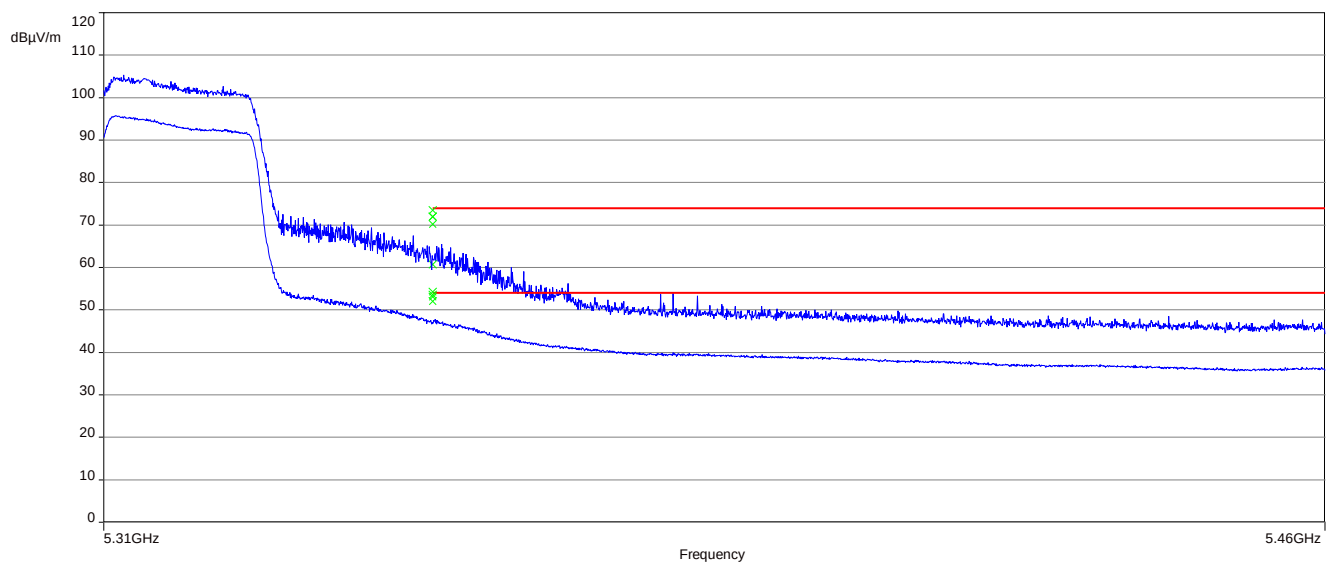


Plot 15: lower band edge; U-NII-2C; lowest channel; n40-mode

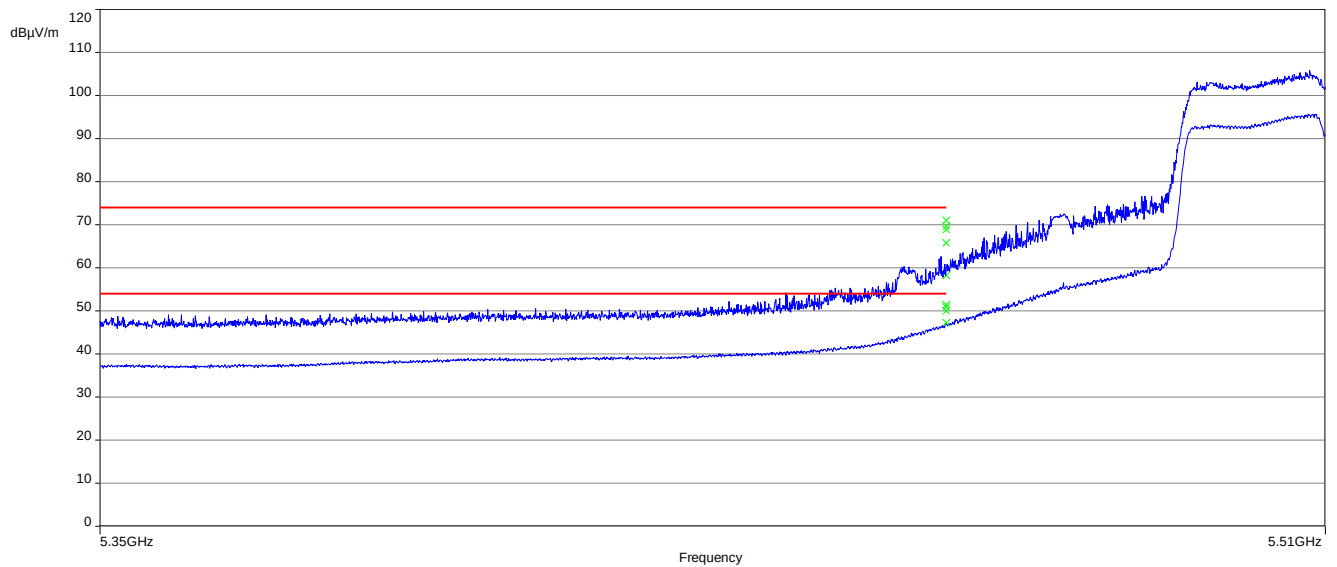


Plot 16: lower band edge; U-NII-1; lowest channel; ac40-mode

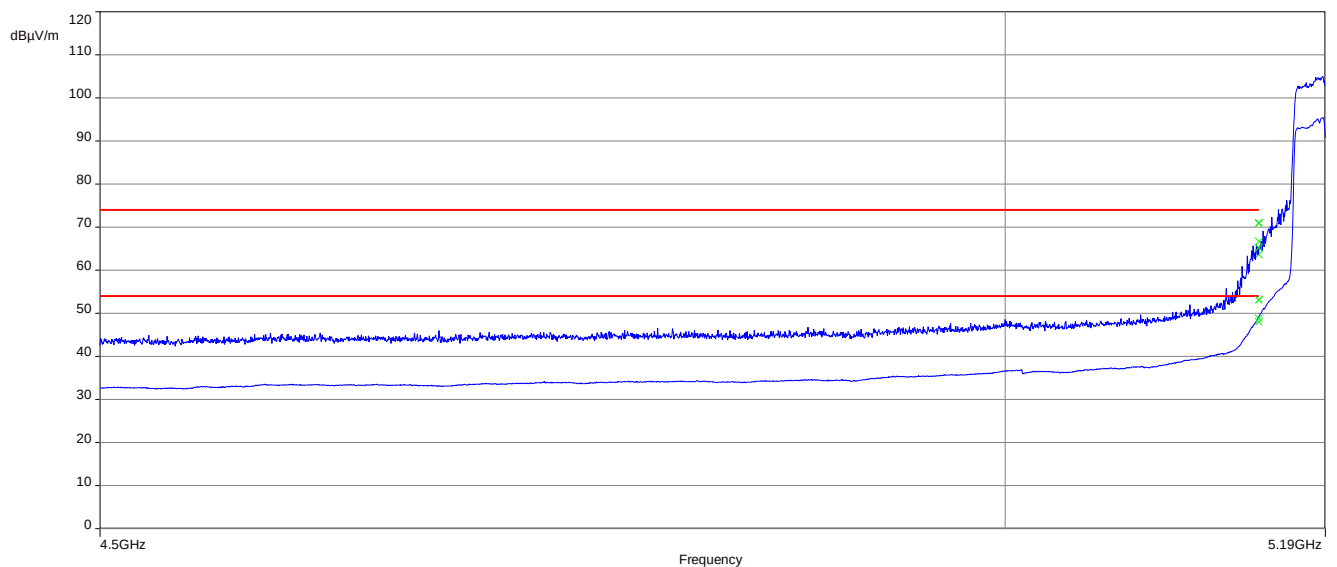


Plot 17: upper band edge; U-NII-2A; highest channel; ac40-mode

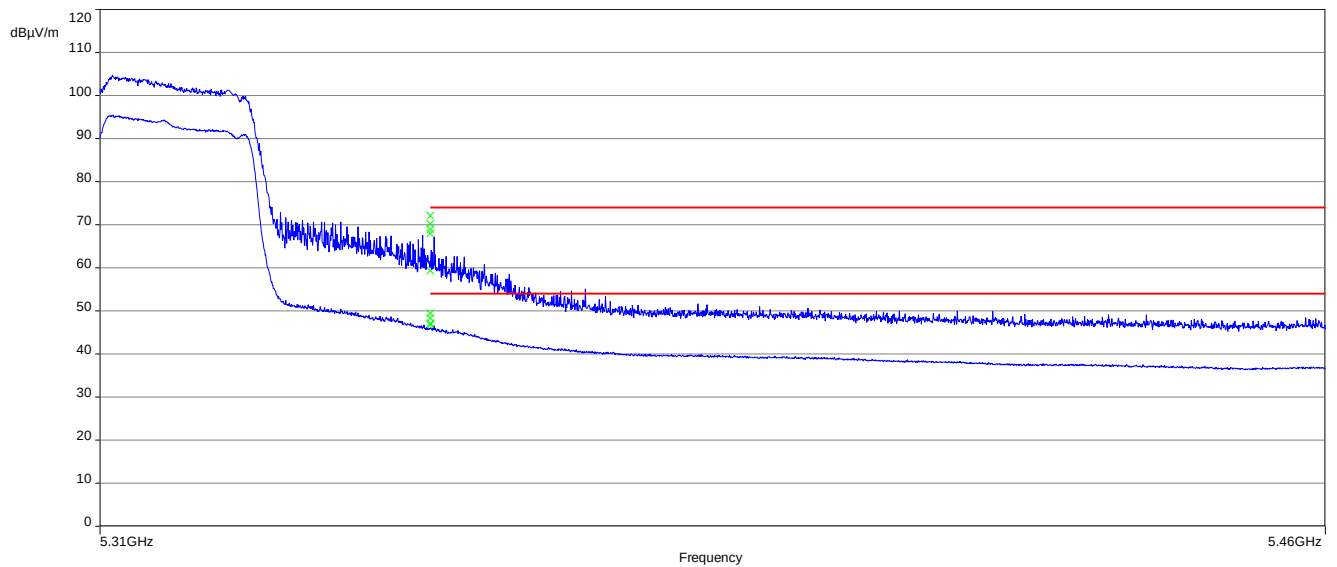

Plot 18: lower band edge; U-NII-2C; lowest channel; ac40-mode

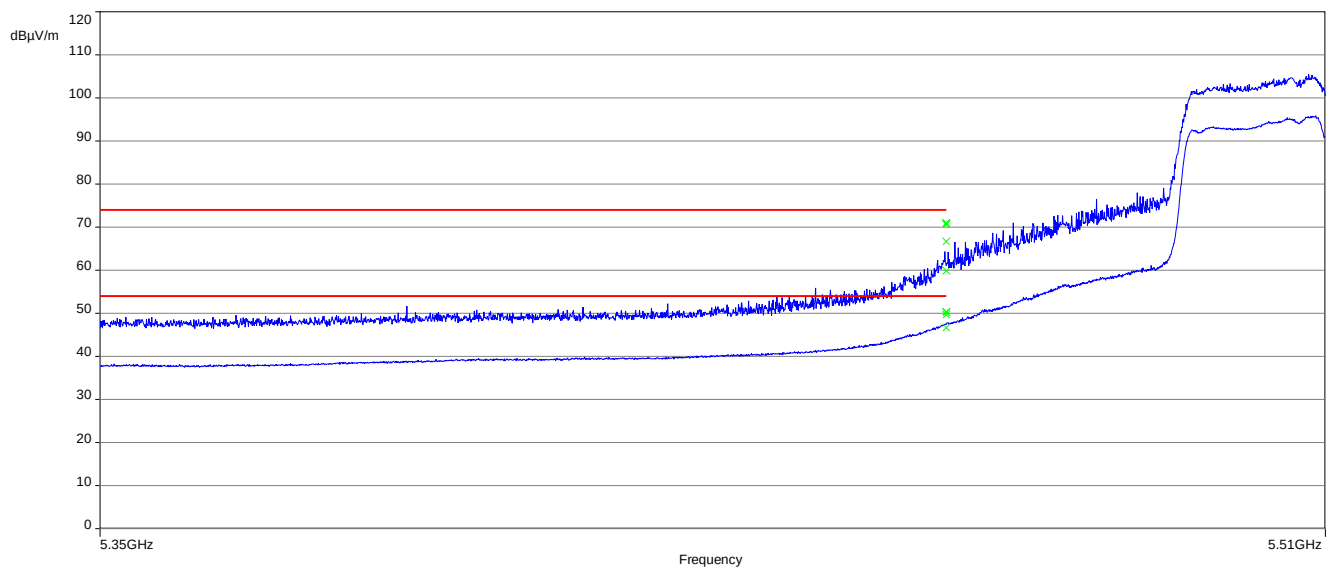


Plot 19: lower band edge; U-NII-1; lowest channel; ax40-mode


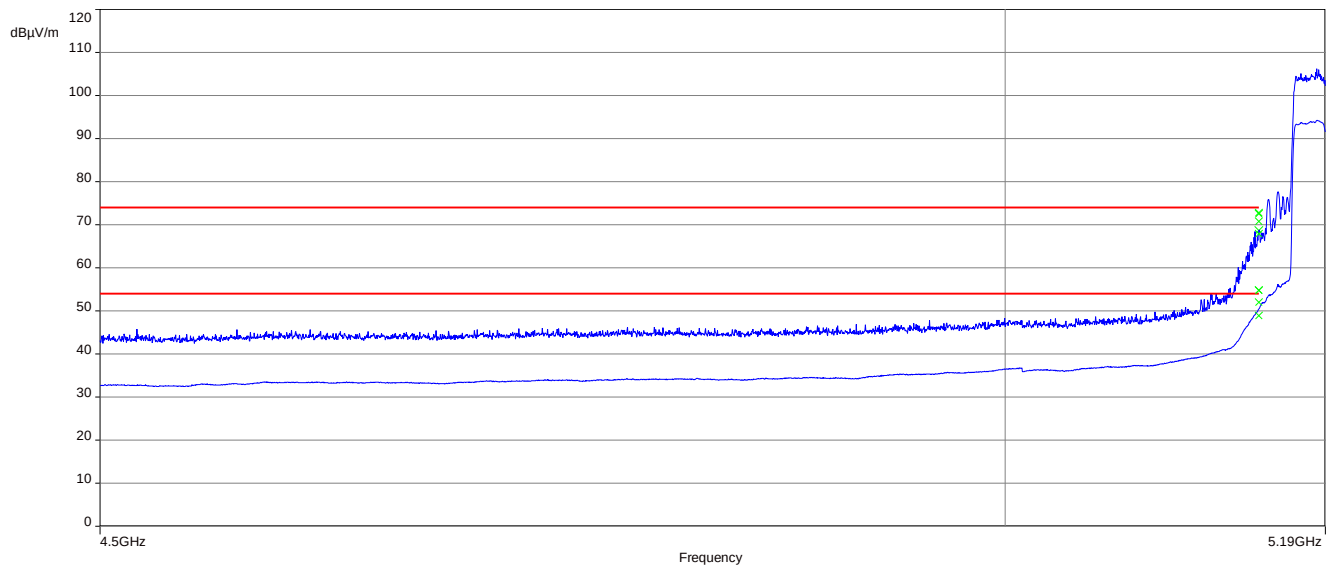


Plot 20: upper band edge; U-NII-2A; highest channel; ax40-mode




Plot 21: lower band edge; U-NII-2C; lowest channel; ax40-mode

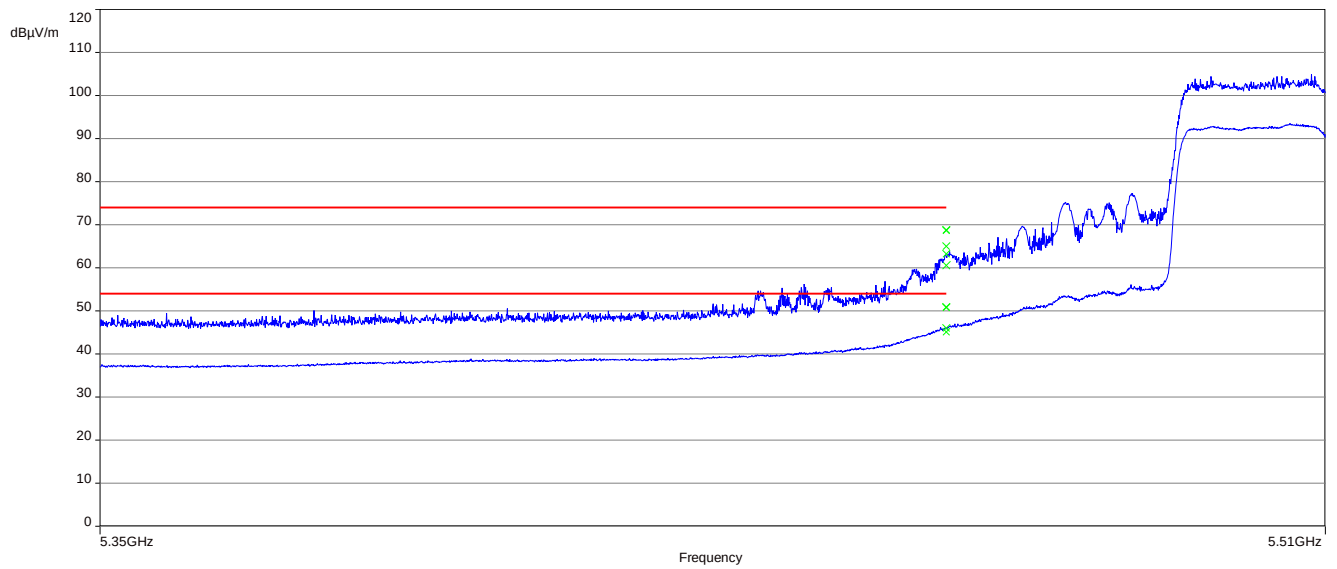


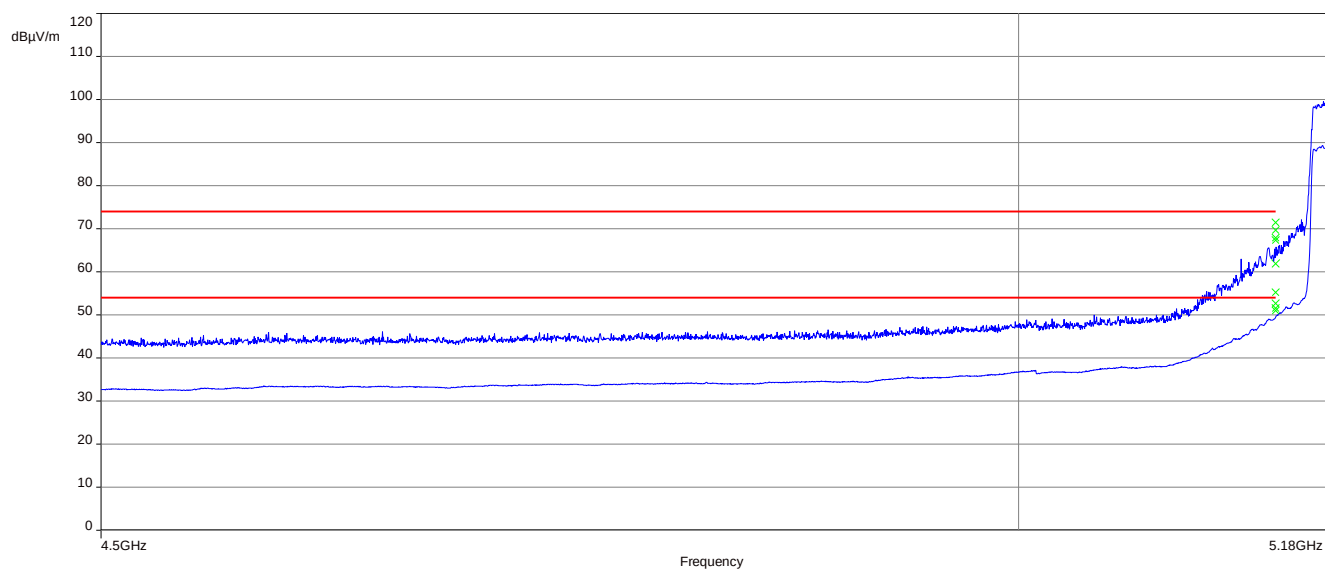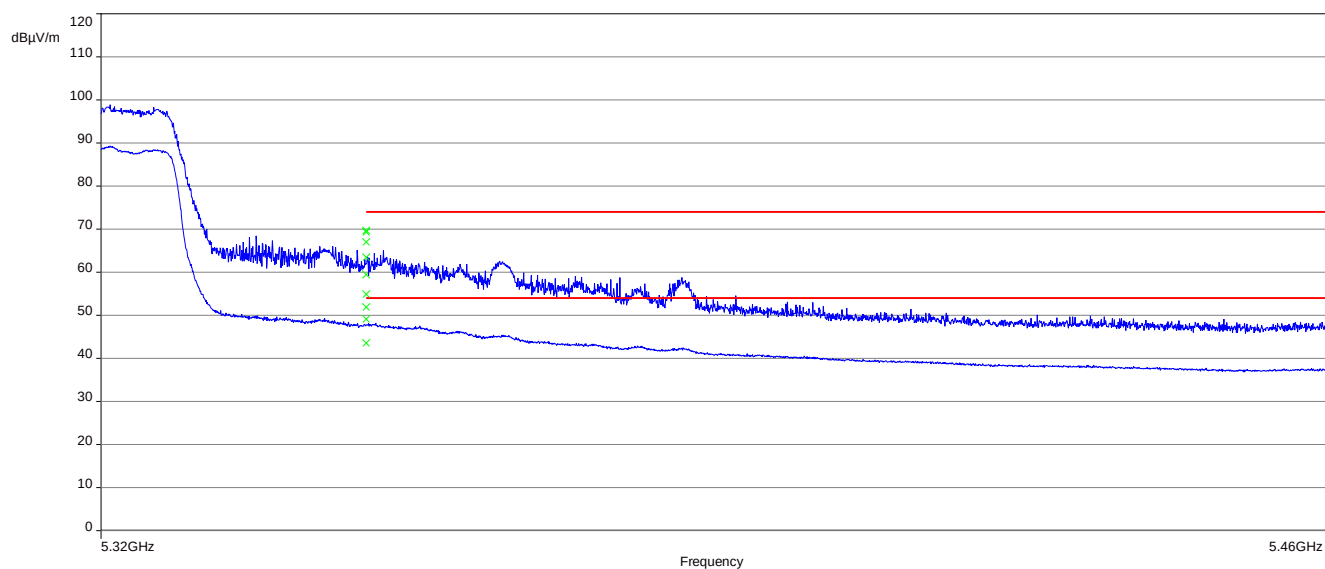Plot 22: lower band edge; U-NII-1; middle channel; ac80-mode**Plot 23:** upper band edge; U-NII-2A; middle channel; ac80-mode


Plot 24: lower band edge; U-NII-2C; lowest channel; ac80-mode

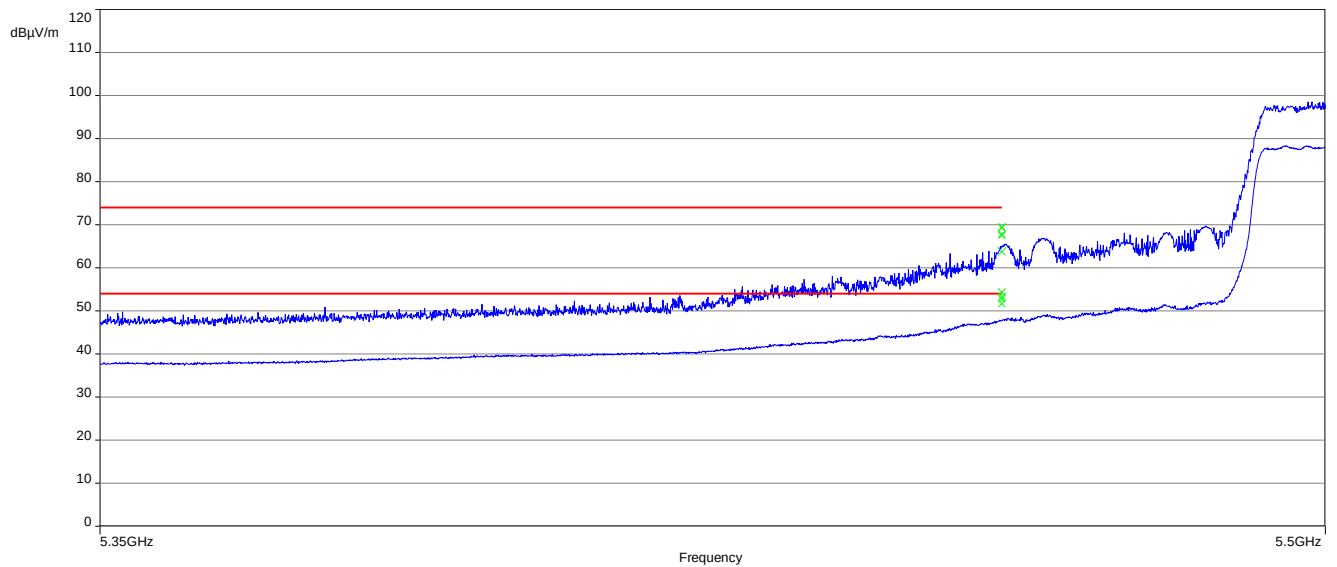


Plot 25: lower band edge; U-NII-1; middle channel; ax80-mode

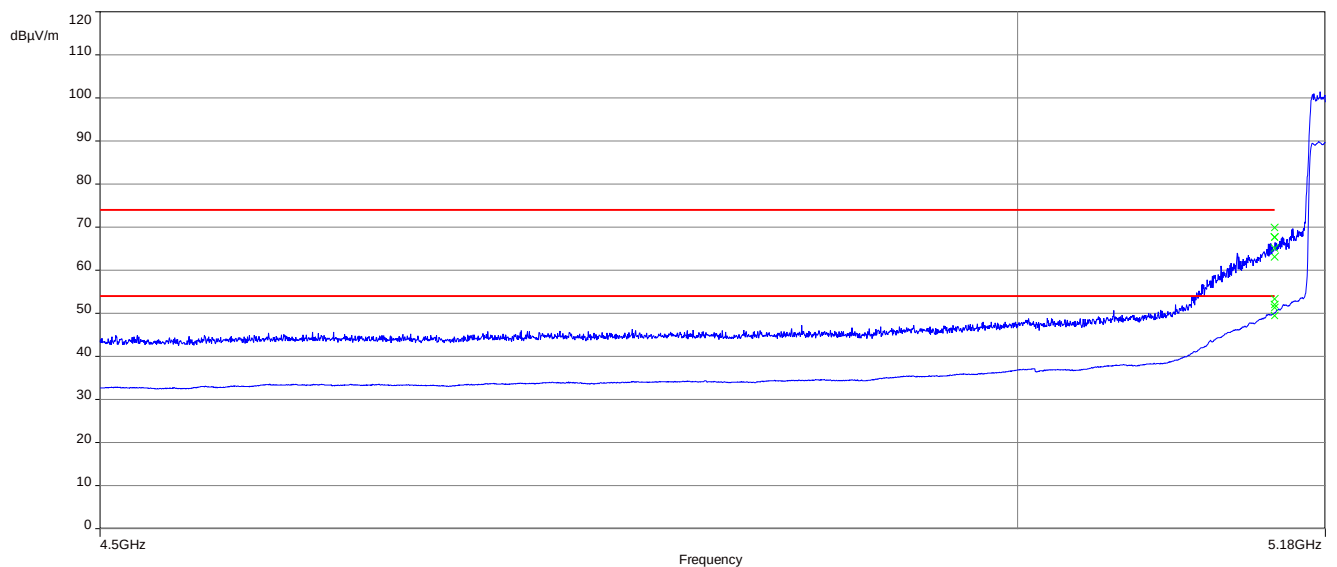

Plot 26: upper band edge; U-NII-2A; middle channel; ax80-mode

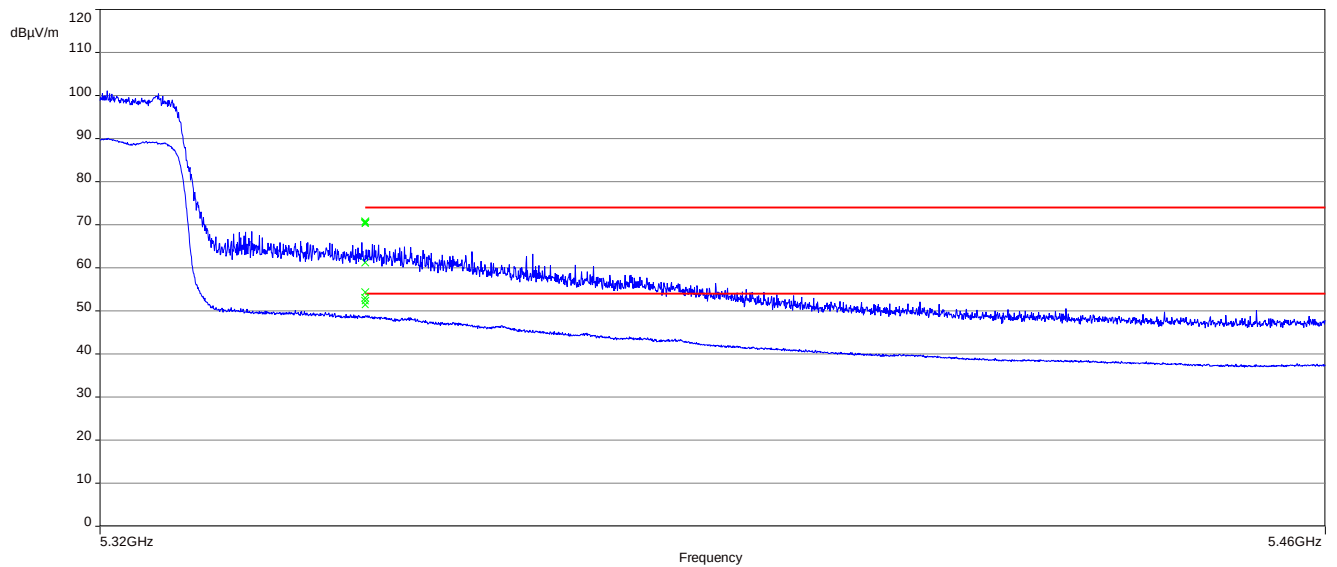

Plot 27: lower band edge; U-NII-2C; lowest channel; ax80-mode

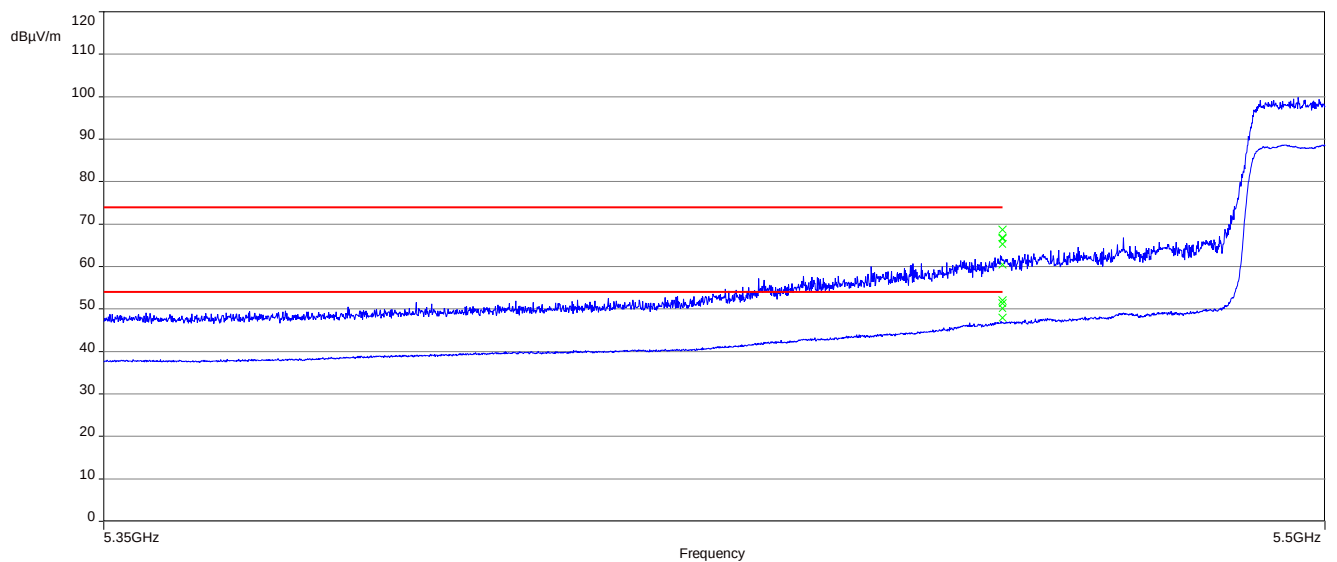

12.11 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are re-calculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace mode:	Max Hold
Test setup:	See sub clause 7.2 – A
Measurement uncertainty:	See chapter 9

Limits:


Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (µV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:


Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
All detected emissions are more than 20 dB below the limit.		

Plots: 20 MHz channel bandwidth


Plot 1: 9 kHz to 30 MHz, U-NII-1; lowest channel

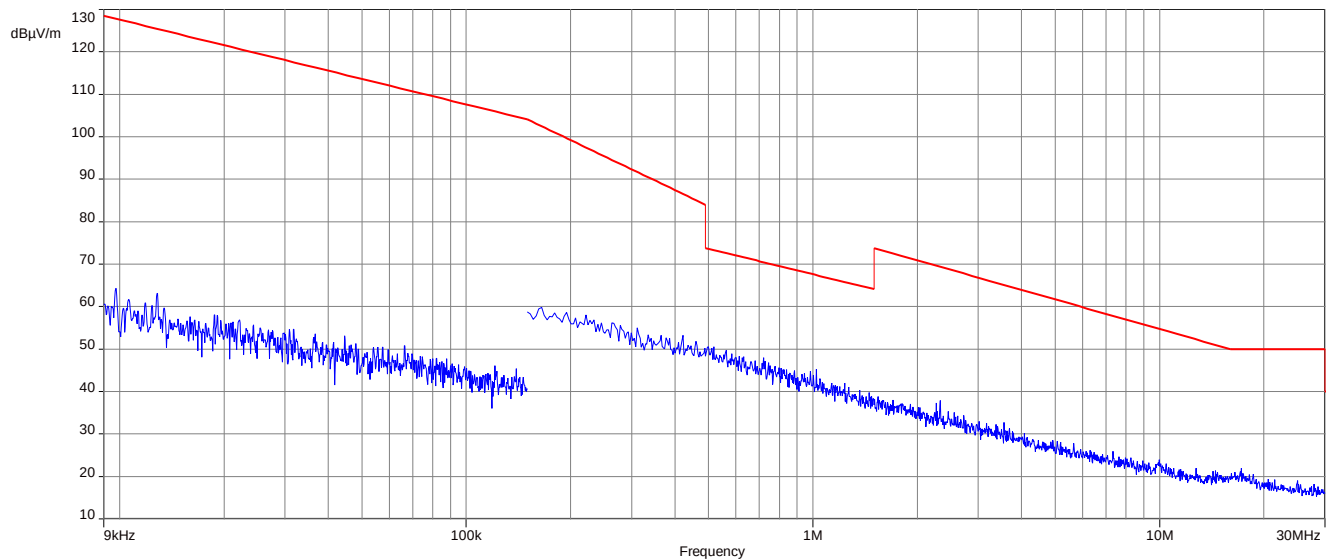


Plot 2: 9 kHz to 30 MHz, U-NII-1; middle channel

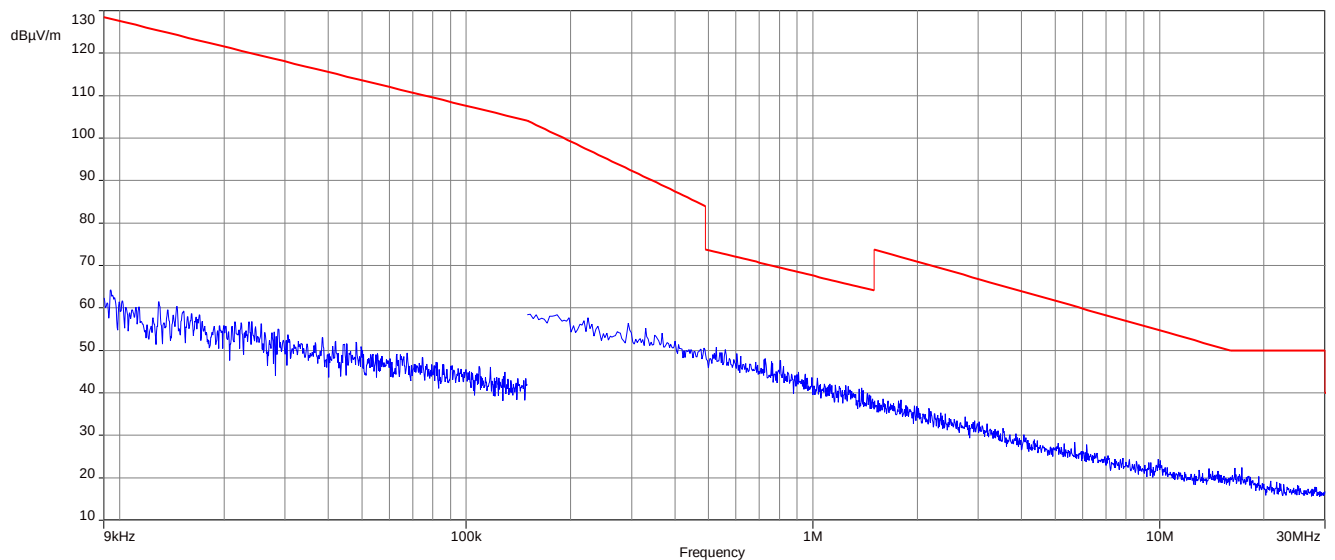


Plot 3: 9 kHz to 30 MHz, U-NII-1; highest channel

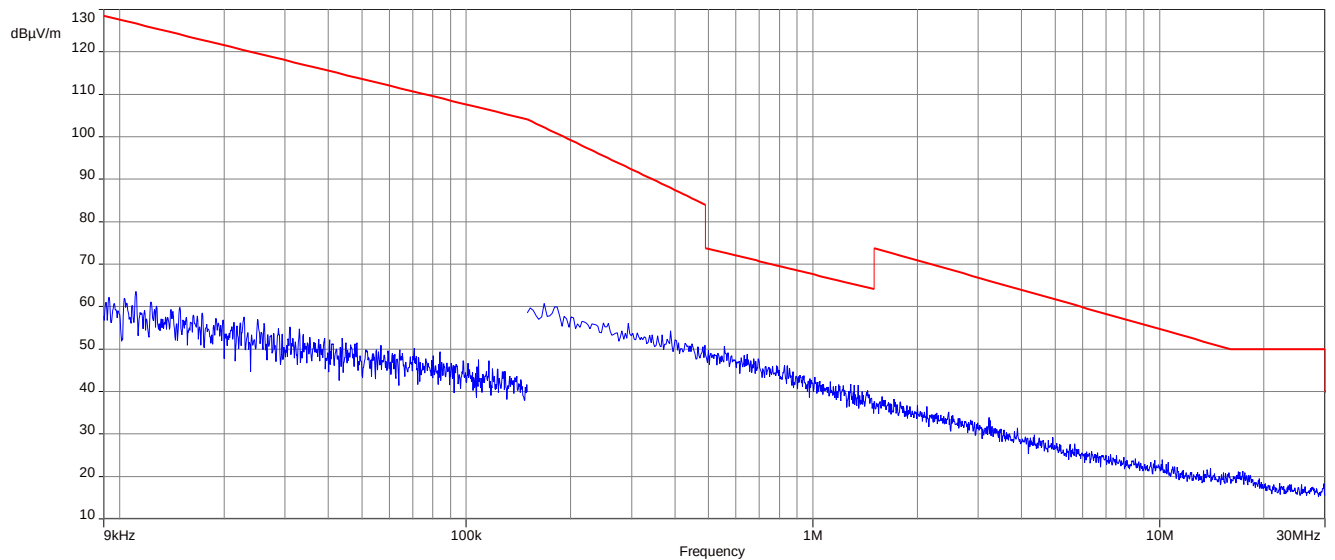


Plot 4: 9 kHz to 30 MHz, U-NII-2A; lowest channel

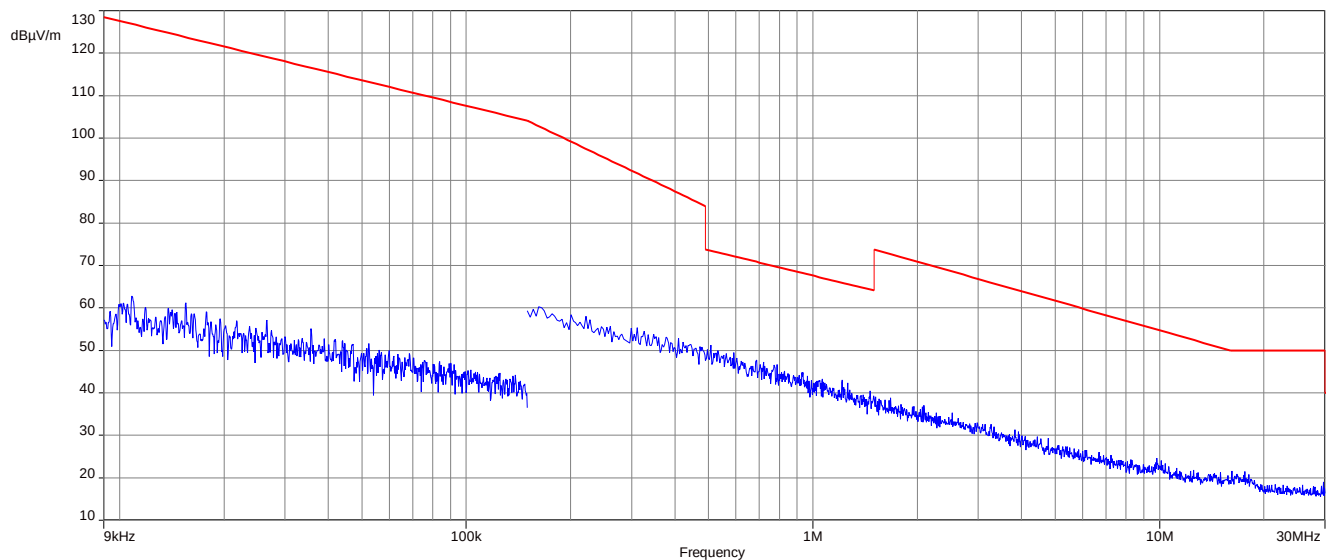


Plot 5: 9 kHz to 30 MHz, U-NII-2A; middle channel

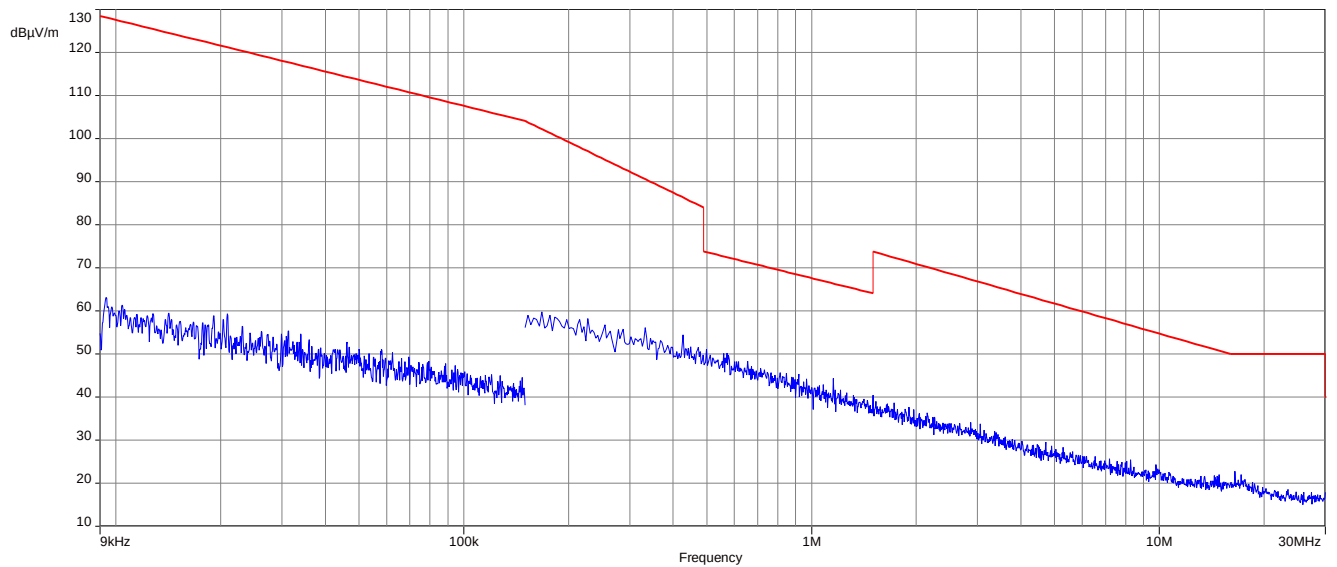


Plot 6: 9 kHz to 30 MHz, U-NII-2A; highest channel

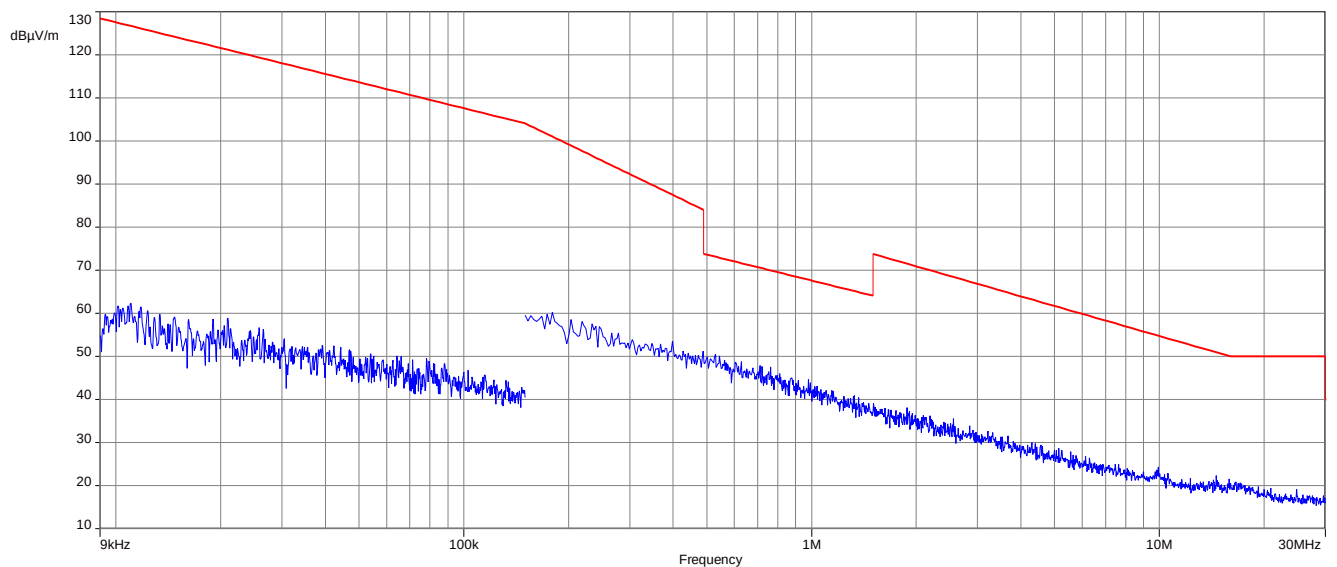


Plot 7: 9 kHz to 30 MHz, U-NII-2C; lowest channel

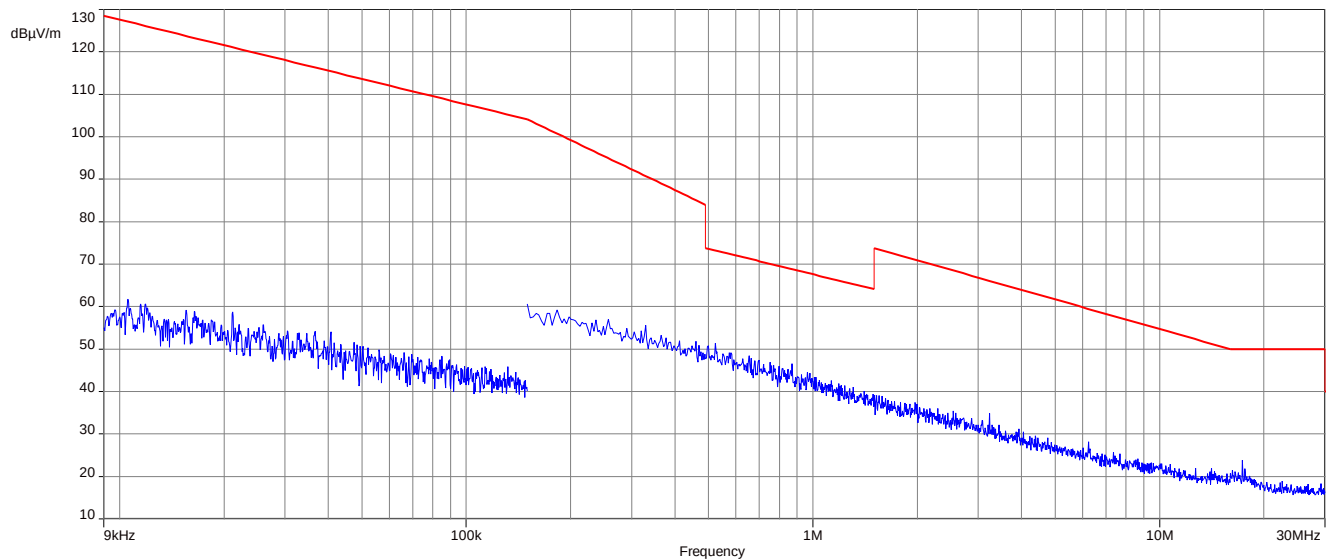


Plot 8: 9 kHz to 30 MHz, U-NII-2C; middle channel

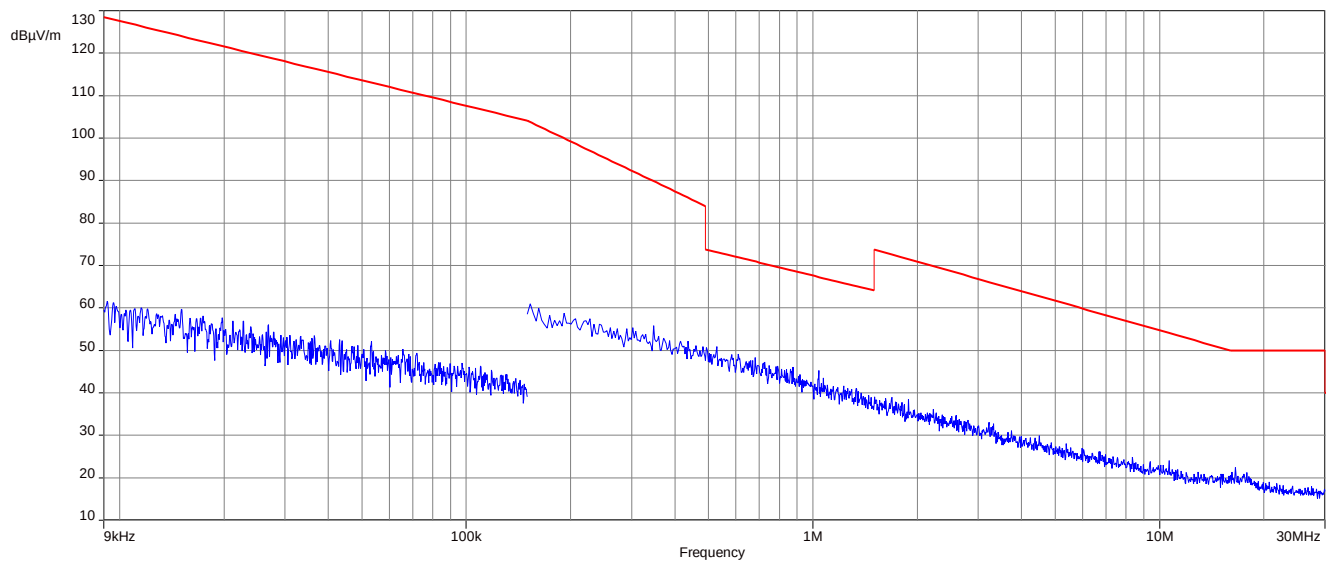


Plot 9: 9 kHz to 30 MHz, U-NII-2C; highest channel

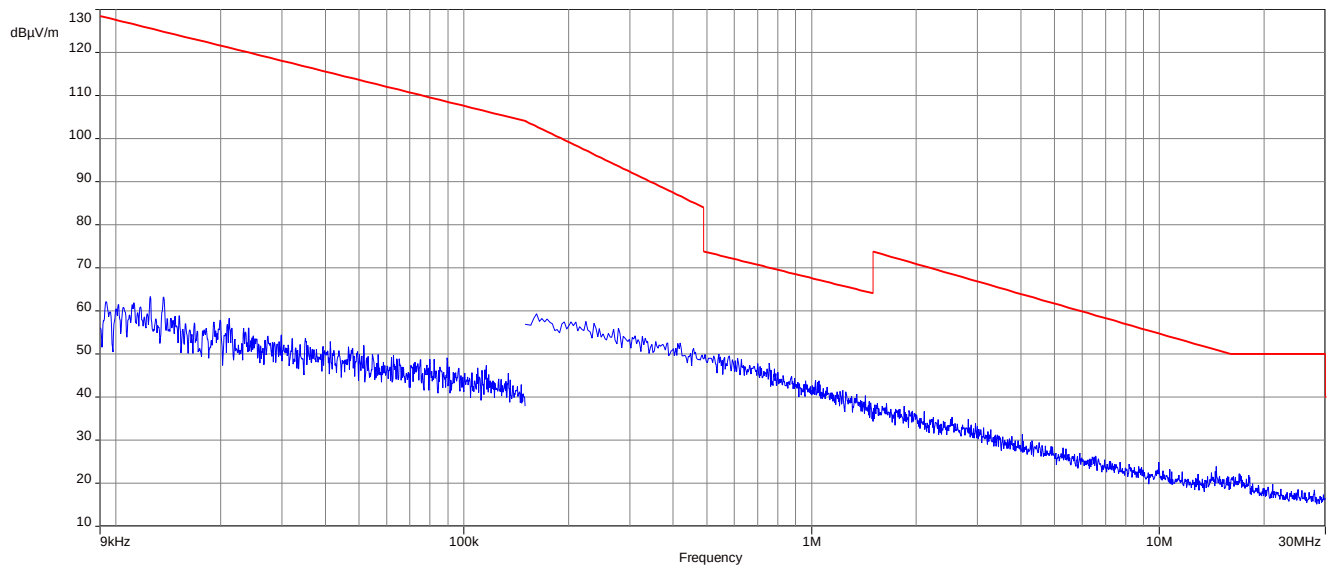


Plot 10: 9 kHz to 30 MHz, U-NII-3; lowest channel

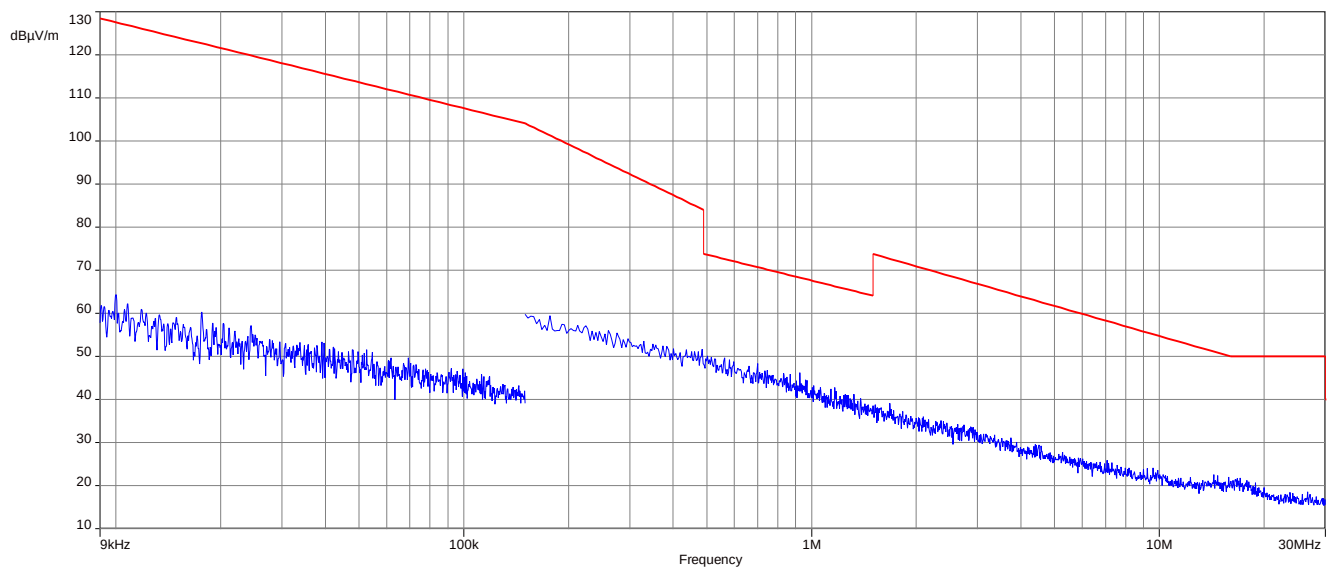

Plot 11: 9 kHz to 30 MHz, U-NII-3; middle channel

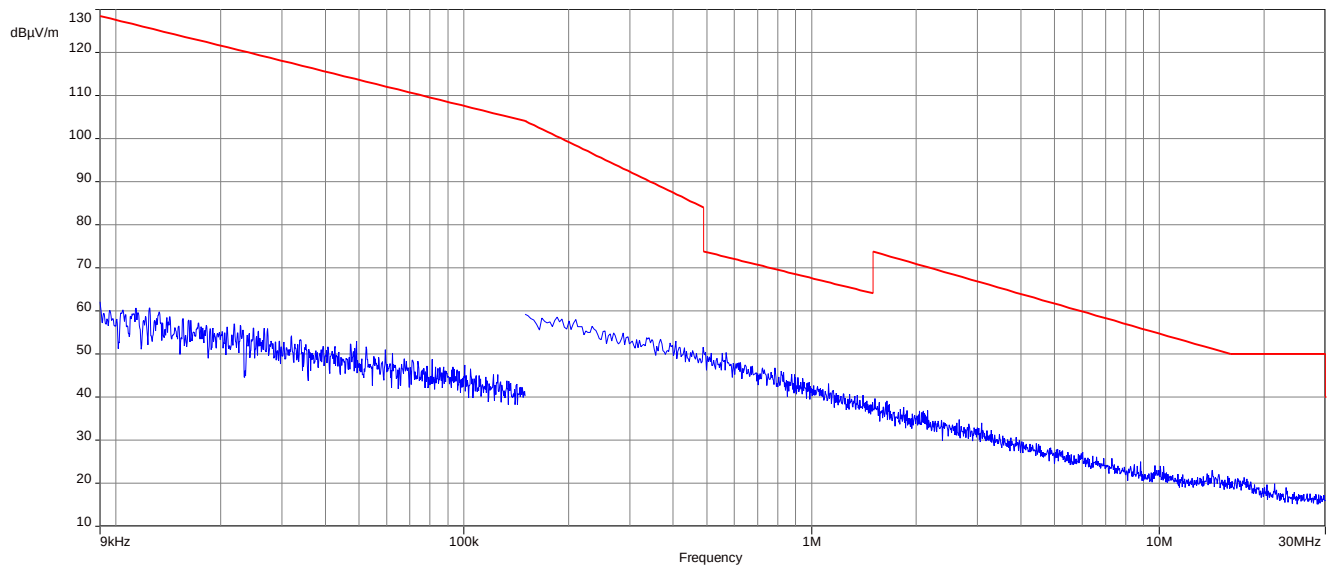


Plot 12: 9 kHz to 30 MHz, U-NII-3; highest channel

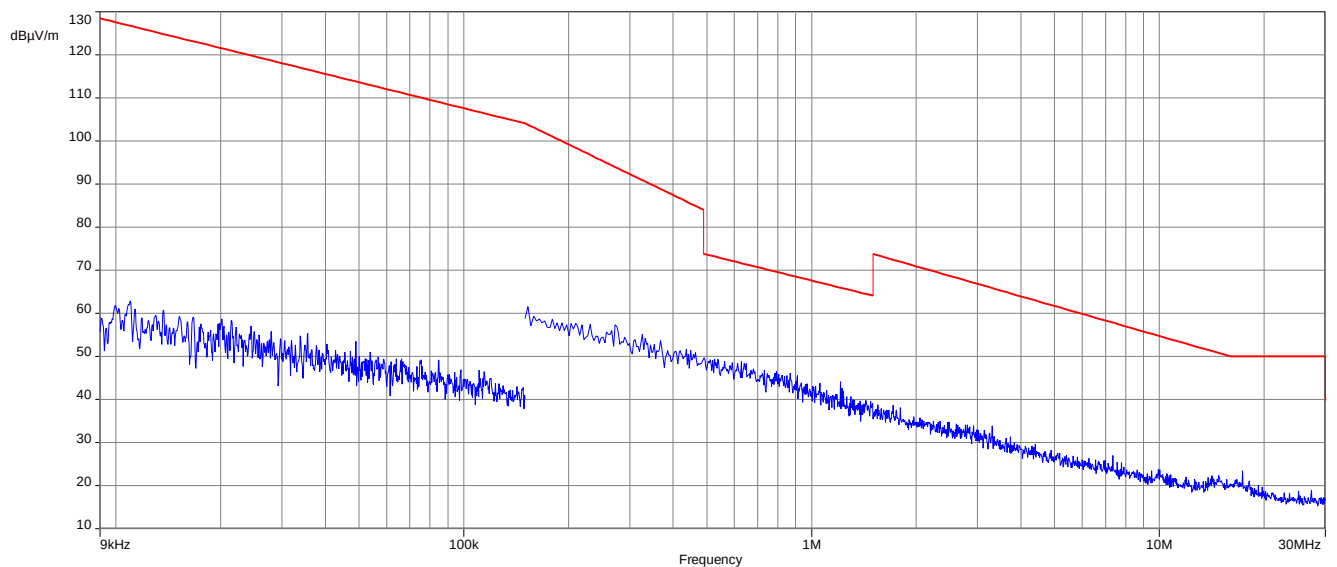


Plots: 40 MHz channel bandwidth


Plot 1: 9 kHz to 30 MHz, U-NII-1; lowest channel

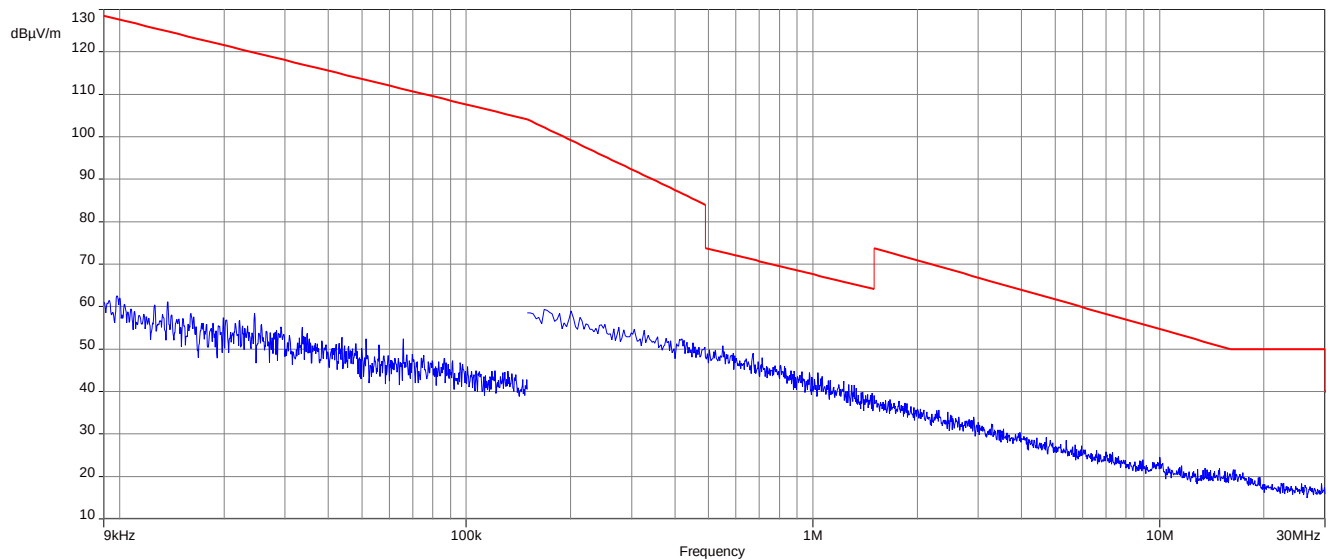


Plot 2: 9 kHz to 30 MHz, U-NII-1; highest channel

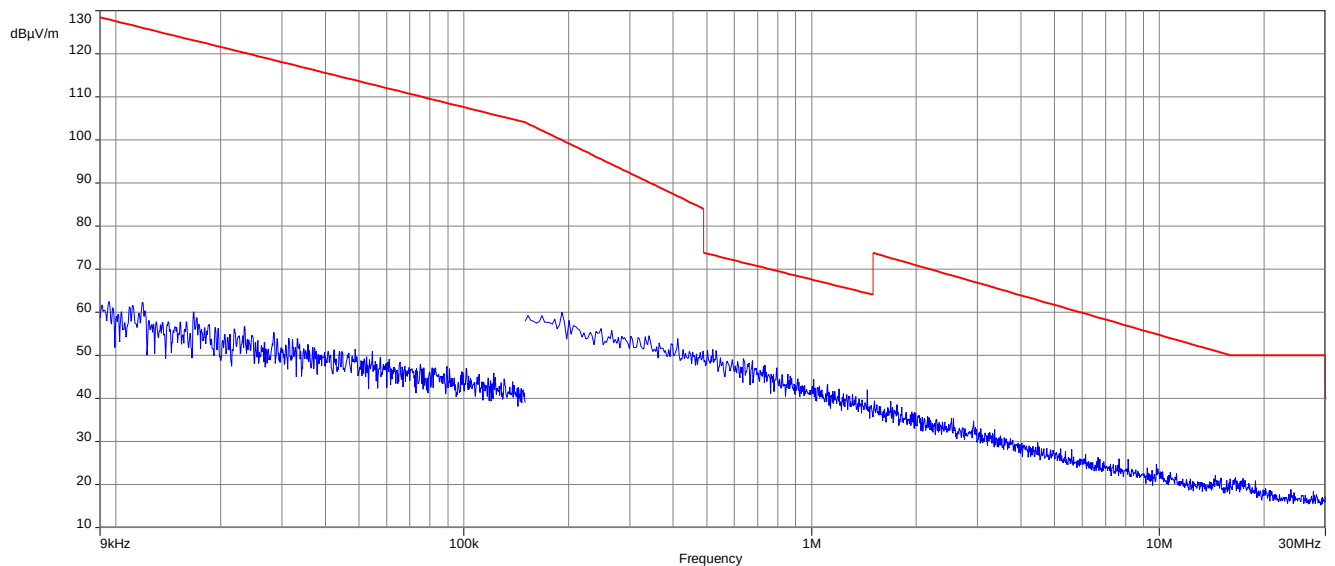


Plot 3: 9 kHz to 30 MHz, U-NII-2A; lowest channel

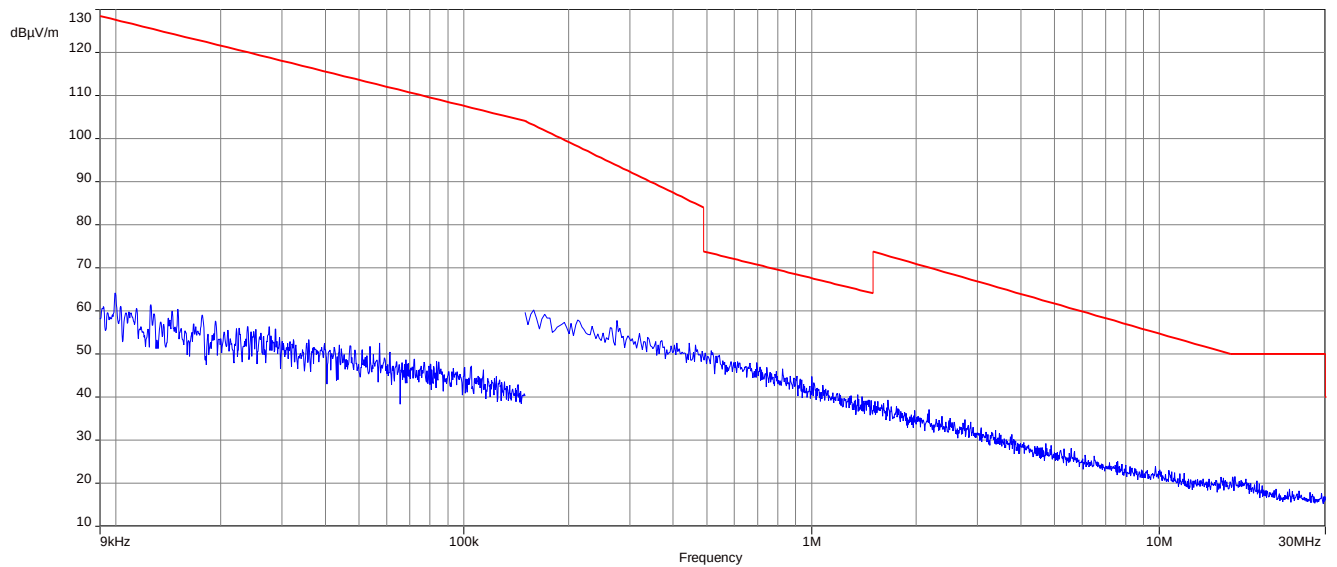


Plot 4: 9 kHz to 30 MHz, U-NII-2A; highest channel

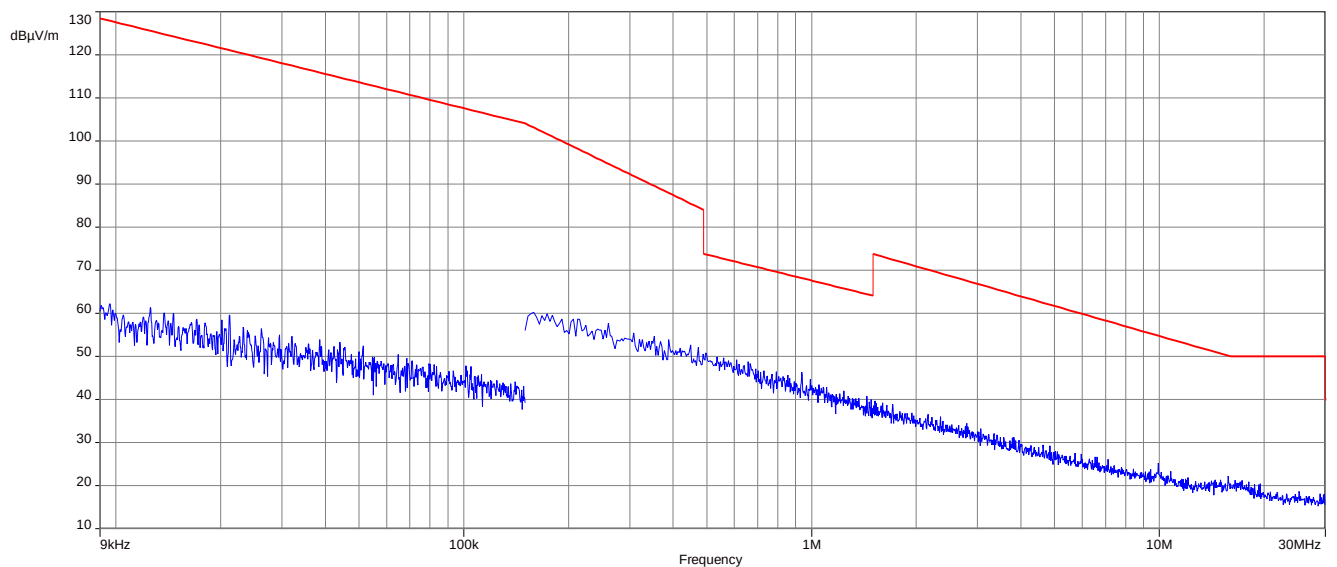


Plot 5: 9 kHz to 30 MHz, U-NII-2C; lowest channel

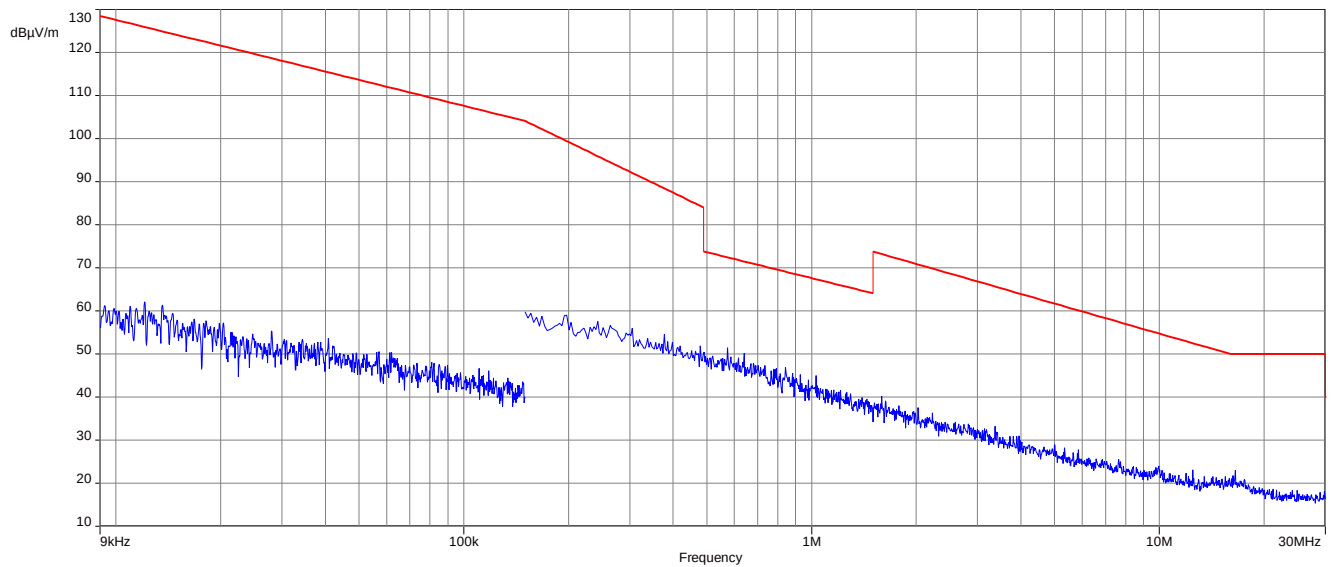


Plot 6: 9 kHz to 30 MHz, U-NII-2C; middle channel

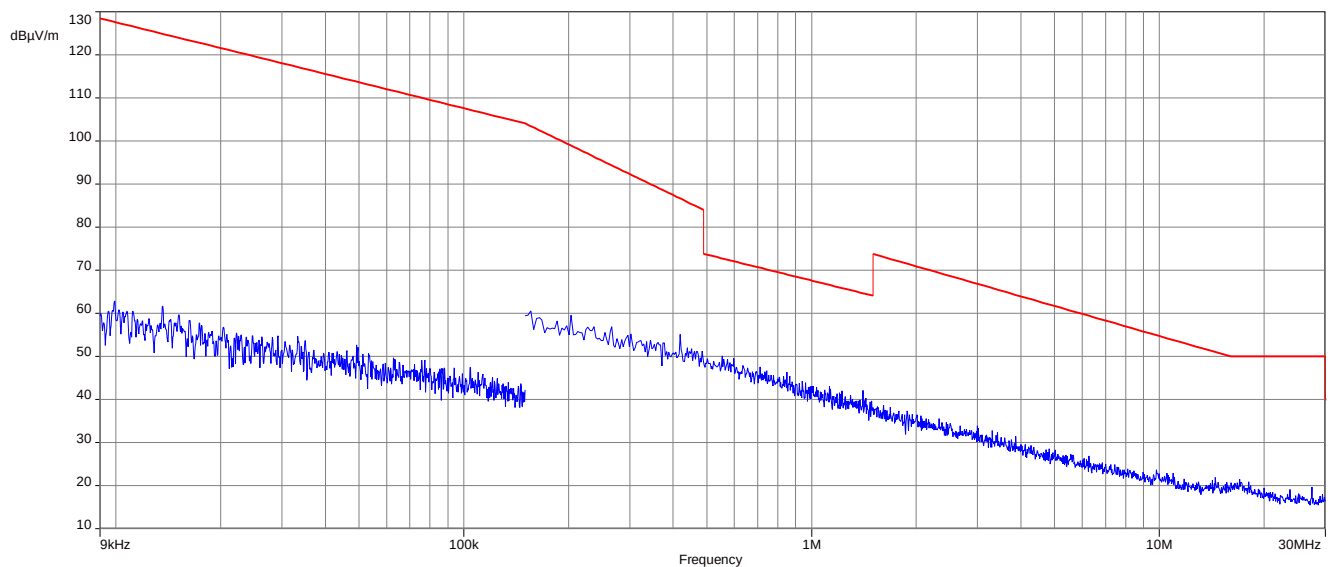


Plot 7: 9 kHz to 30 MHz, U-NII-2C; highest channel

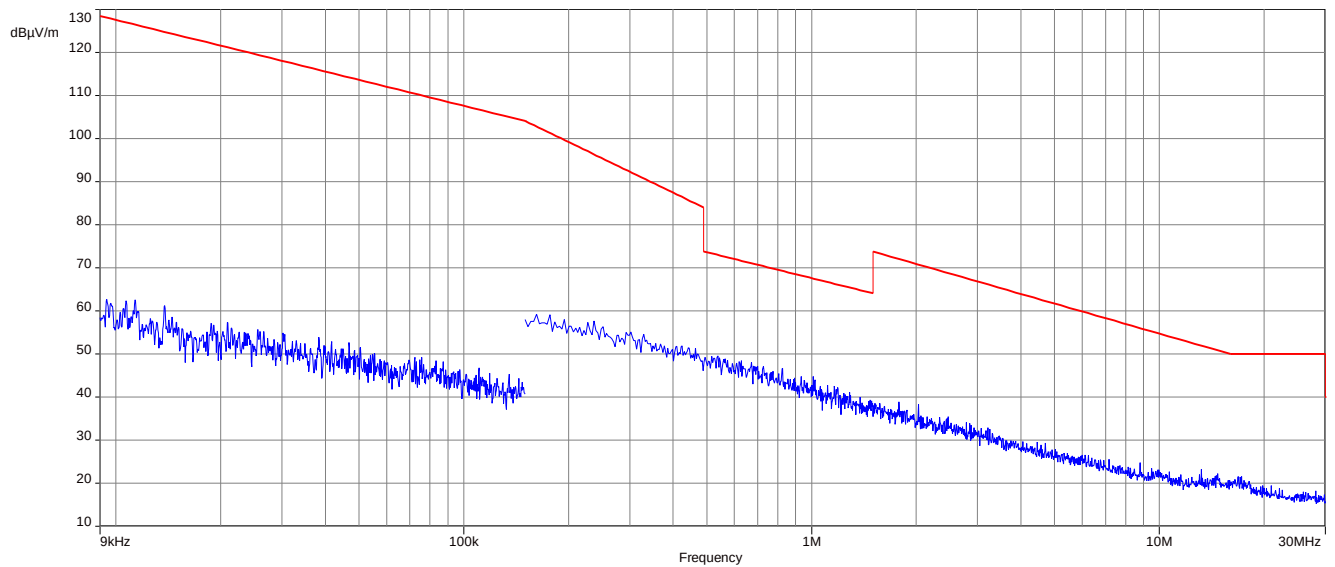

Plot 8: 9 kHz to 30 MHz, U-NII-3; lowest channel

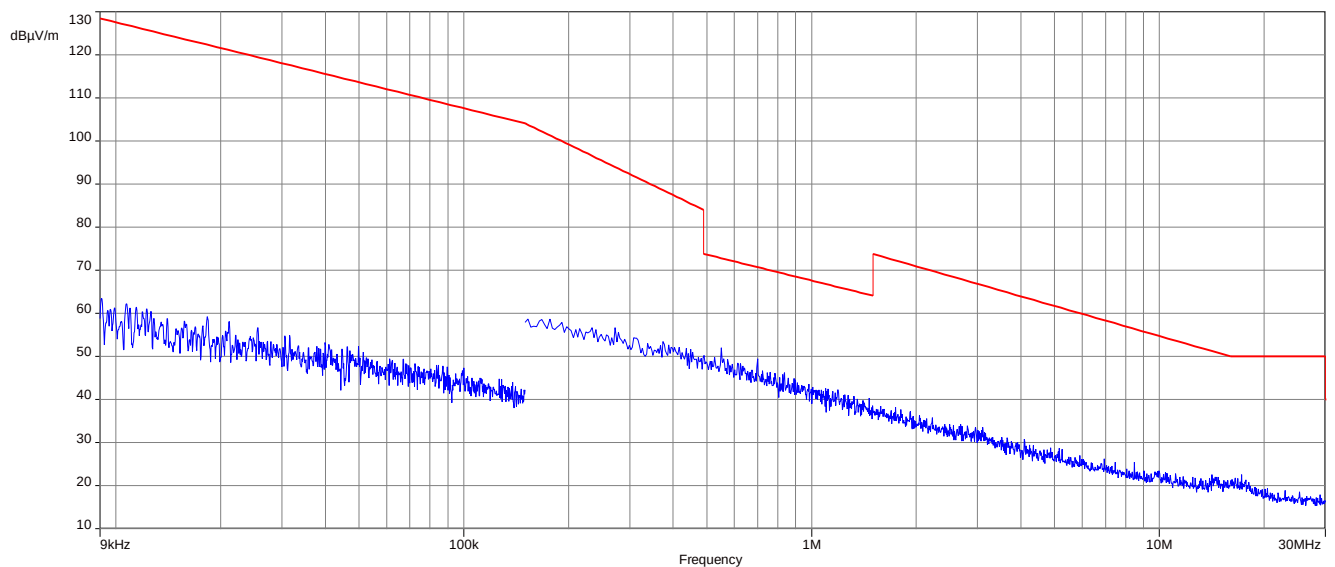


Plot 9: 9 kHz to 30 MHz, U-NII-3; highest channel

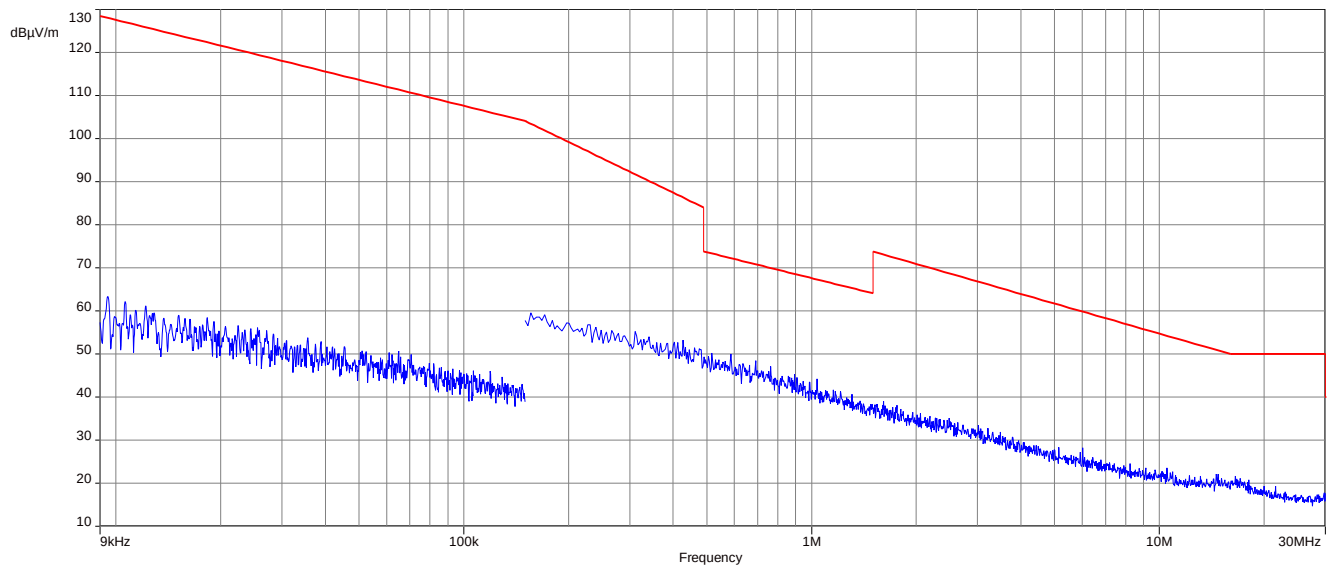


Plots: 80 MHz channel bandwidth


Plot 1: 9 kHz to 30 MHz, U-NII-1; middle channel

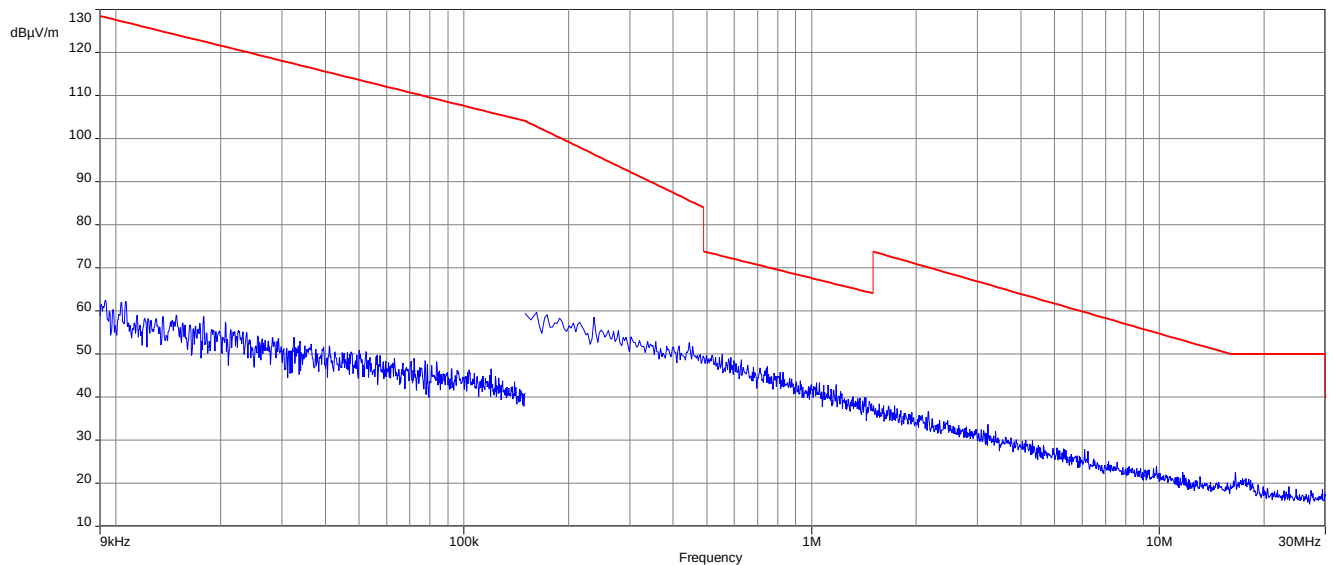


Plot 2: 9 kHz to 30 MHz, U-NII-2A; middle channel

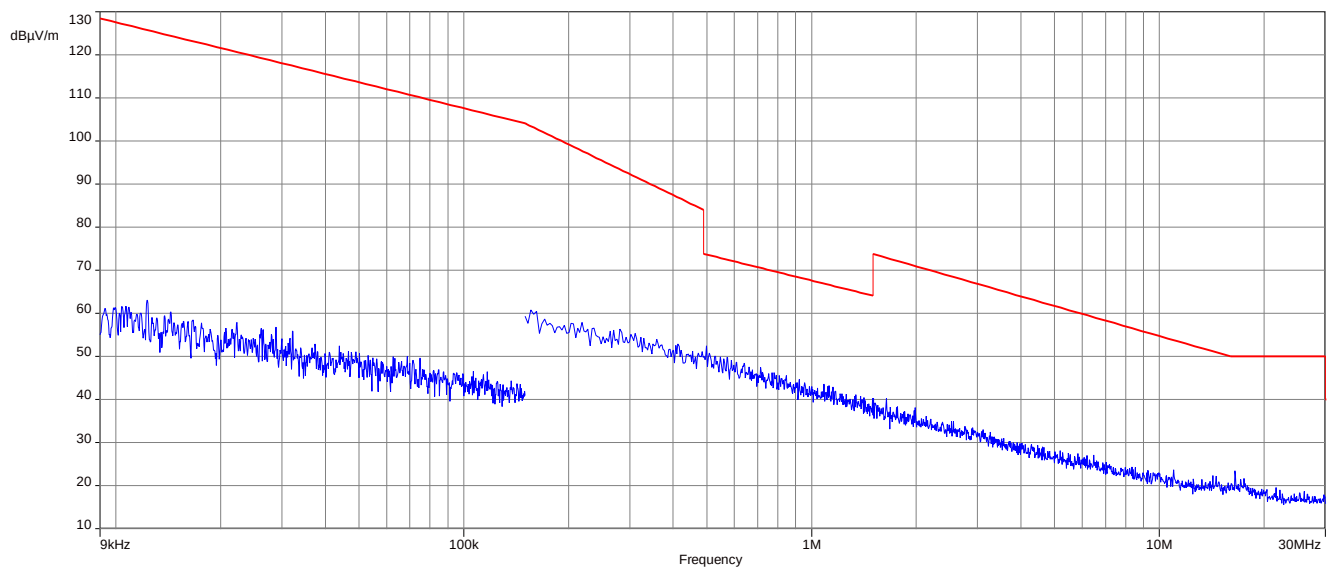


Plot 3: 9 kHz to 30 MHz, U-NII-2C; lowest channel

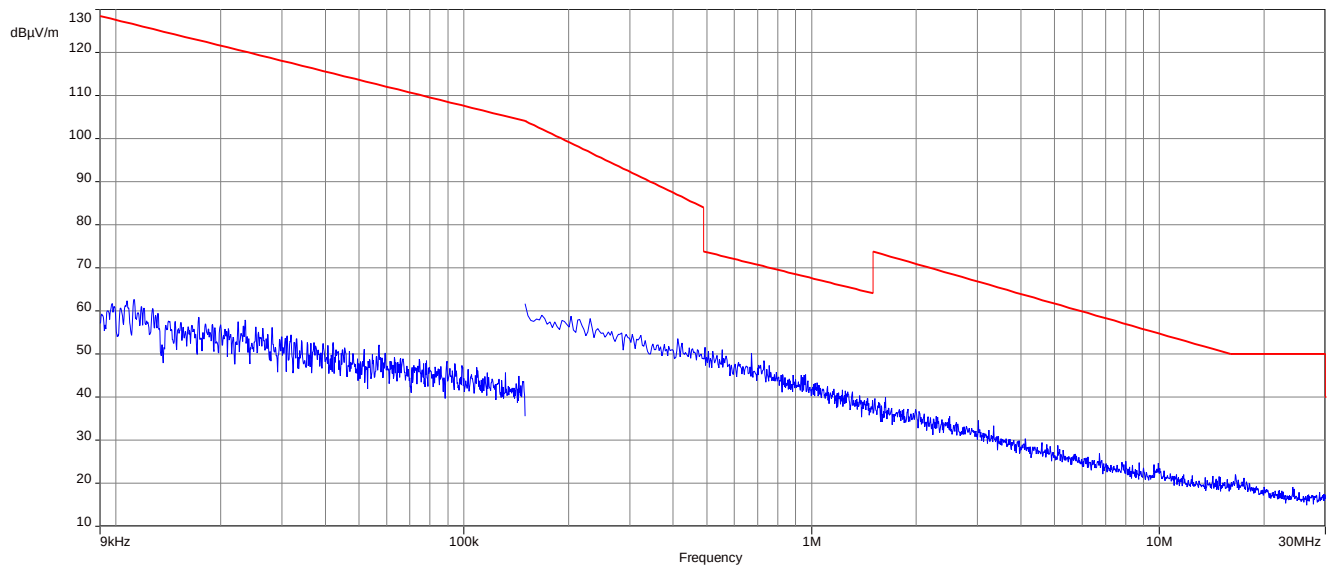

Plot 4: 9 kHz to 30 MHz, U-NII-2C; highest channel

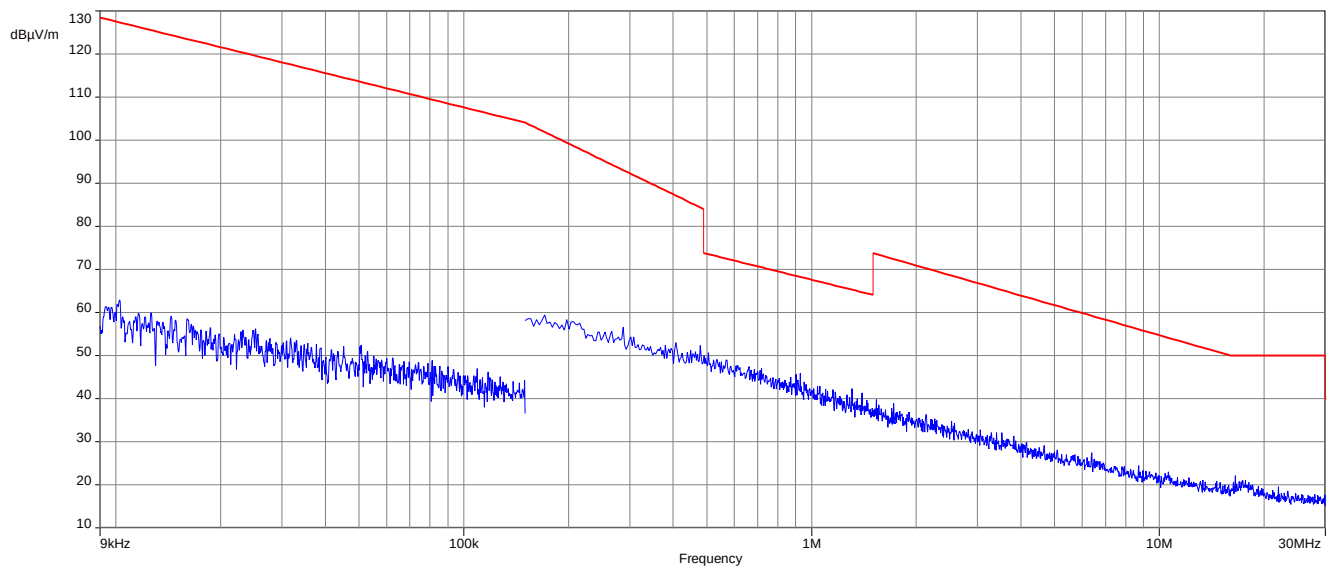

Plot 5: 9 kHz to 30 MHz, U-NII-3; middle channel

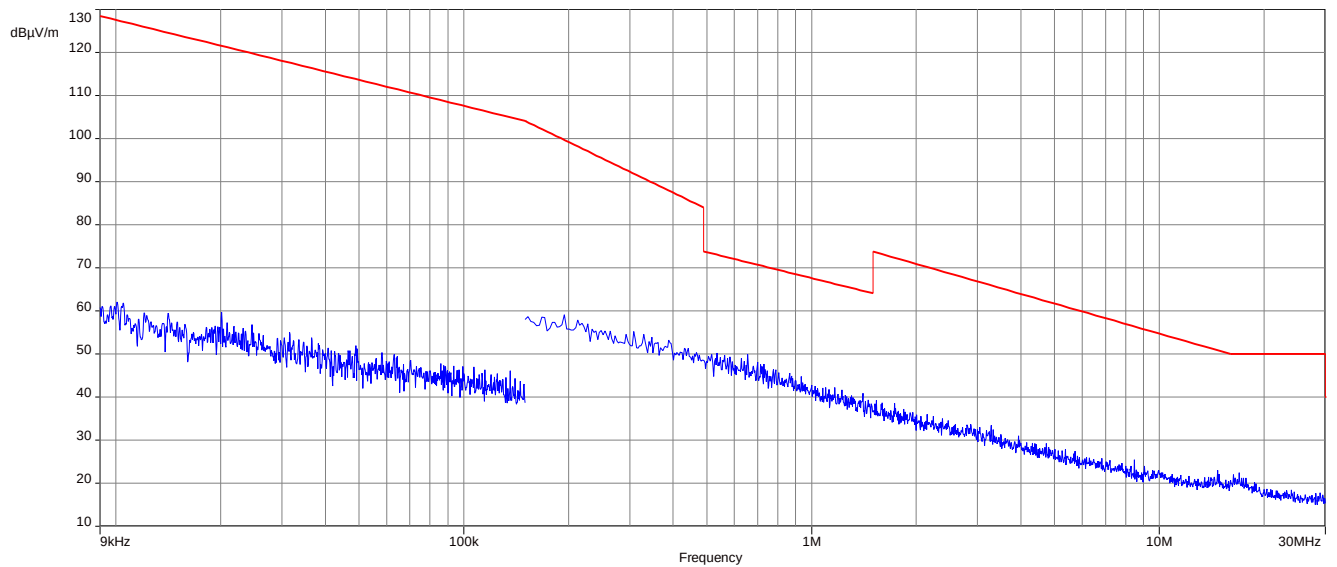

12.12 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:


Measurement parameter	
Detector:	Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	120 kHz
Video bandwidth:	500 kHz
Span:	30 MHz to 1 GHz
Test setup:	See sub clause 7.1 A
Measurement uncertainty:	See chapter 9

Limits:

TX Spurious Emissions Radiated		
§15.209 / RSS-247		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

Plots: 20 MHz channel bandwidth

Plot 1: 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

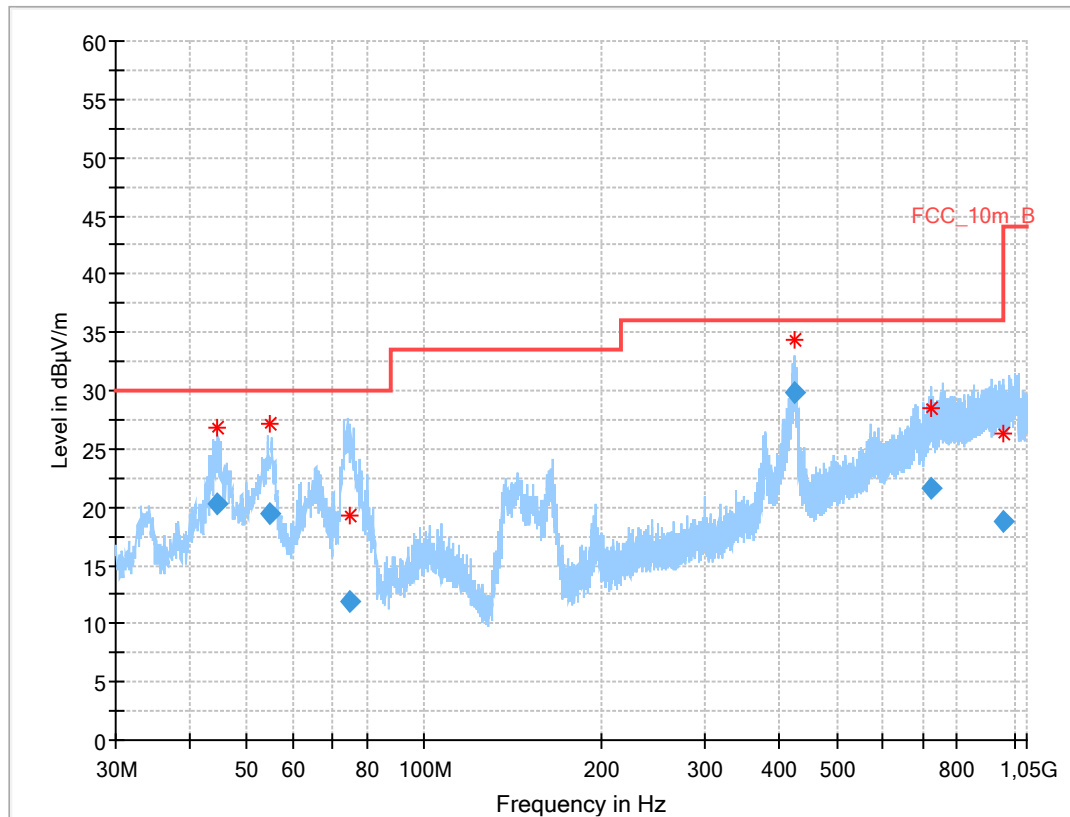


Results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
44.677	20.32	30.0	9.7	1000	120.0	119.0	V	74	15
54.766	19.46	30.0	10.5	1000	120.0	200.0	V	104	15
74.889	11.94	30.0	18.1	1000	120.0	400.0	V	192	9
425.338	29.85	36.0	6.2	1000	120.0	209.0	H	25	19
721.256	21.54	36.0	14.5	1000	120.0	308.0	V	39	23
959.089	18.84	36.0	17.2	1000	120.0	189.0	V	228	25

Plots: 40 MHz channel bandwidth

Plot 1: 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-2A; highest channel

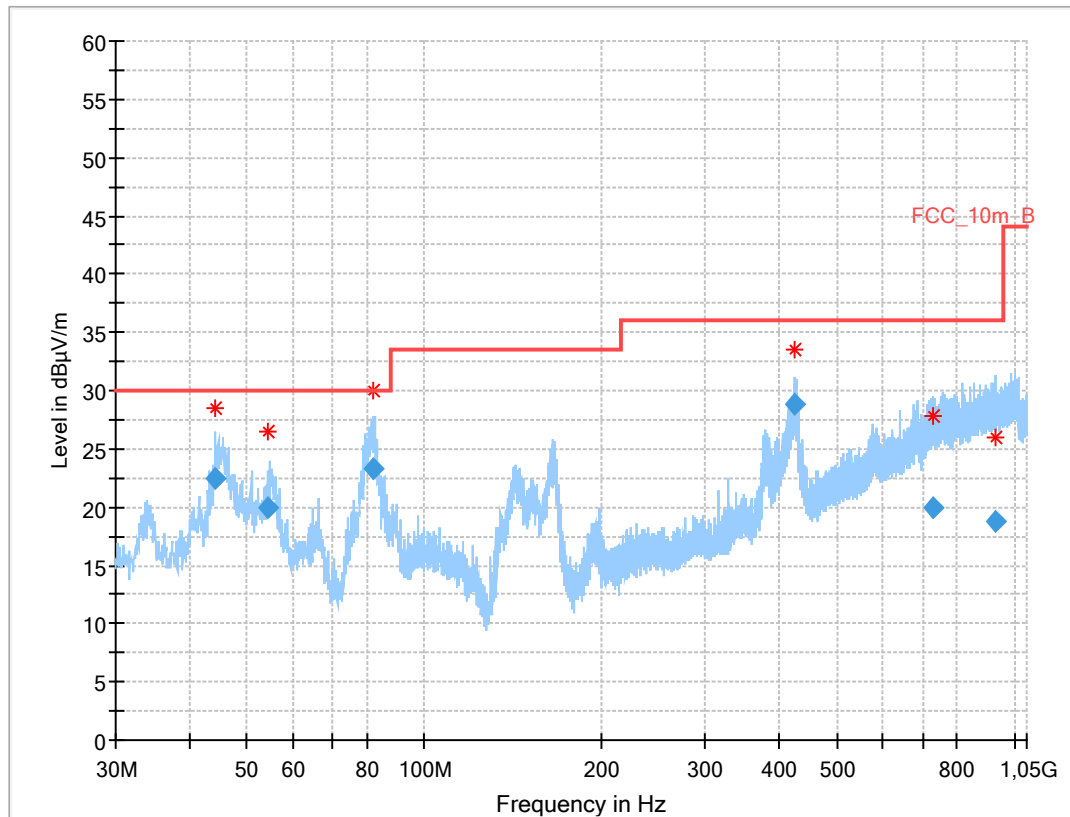


Results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
44.262	22.43	30.0	7.6	1000	120.0	116.0	V	71	15
54.489	20.02	30.0	10.0	1000	120.0	104.0	V	225	15
81.891	23.27	30.0	6.7	1000	120.0	400.0	V	94	9
425.055	28.91	36.0	7.1	1000	120.0	209.0	H	284	19
726.505	19.99	36.0	16.0	1000	120.0	400.0	H	90	23
926.948	18.85	36.0	17.2	1000	120.0	400.0	V	225	25


Plots: 80 MHz channel bandwidth

Plot 1: 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

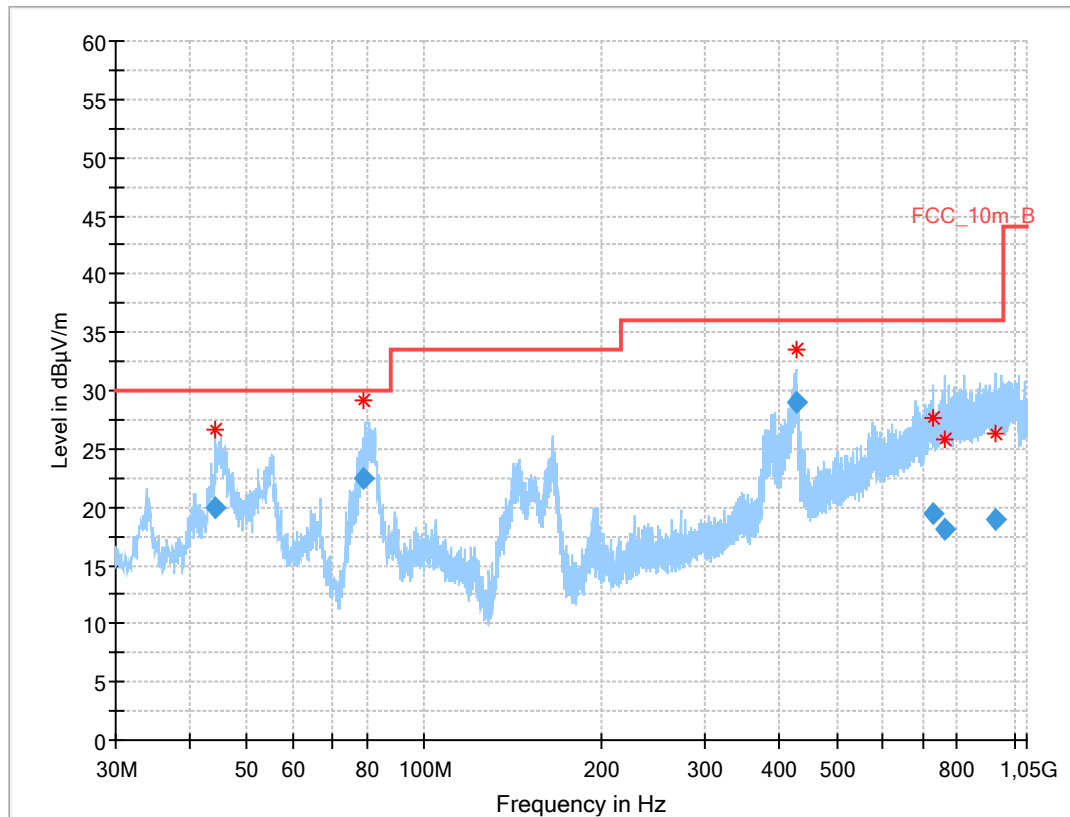

Results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
44.296	19.98	30.0	10.0	1000	120.0	128.0	V	277	15
79.164	22.39	30.0	7.6	1000	120.0	203.0	V	235	8
426.159	29.01	36.0	7.0	1000	120.0	228.0	H	270	19
727.499	19.51	36.0	16.5	1000	120.0	165.0	H	45	23
761.125	18.07	36.0	17.9	1000	120.0	191.0	H	45	24
931.430	18.97	36.0	17.0	1000	120.0	200.0	H	82	25

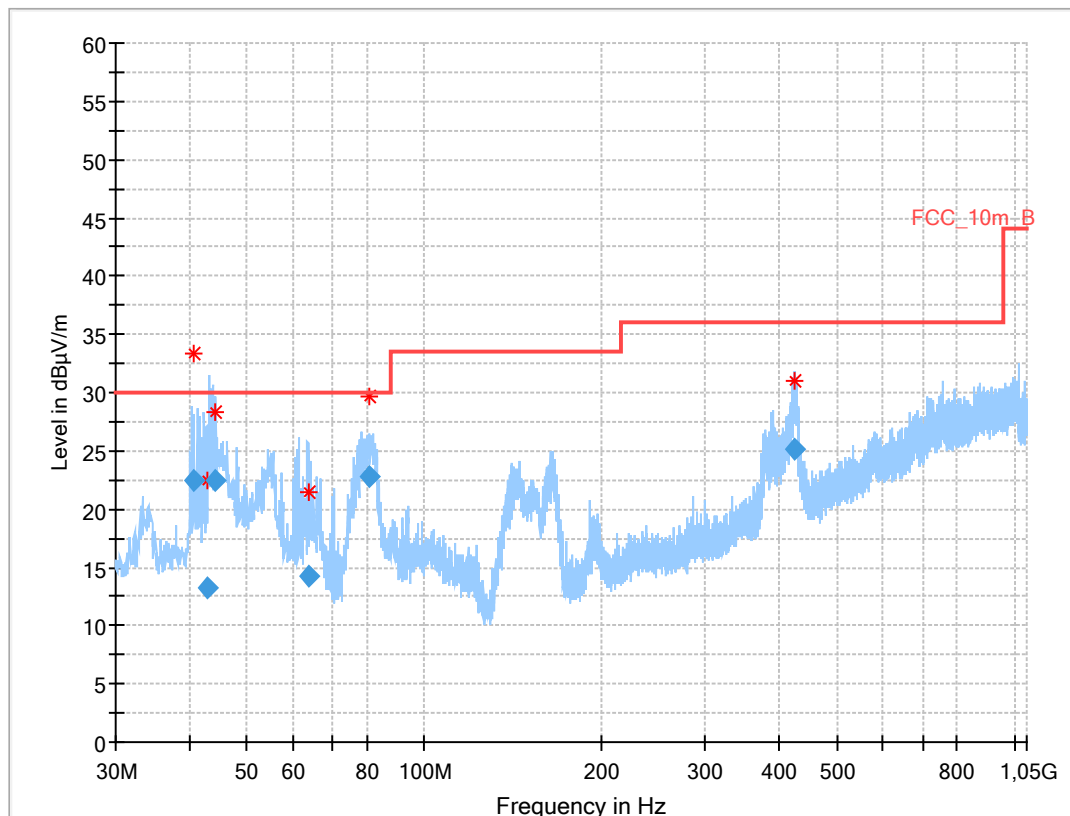Plot 2: 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-3; middle channel**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
40.834	22.39	30.0	7.6	1000	120.0	200.0	V	120	14
42.978	13.28	30.0	16.7	1000	120.0	187.0	V	67	15
44.282	22.40	30.0	7.6	1000	120.0	111.0	V	67	15
63.666	14.27	30.0	15.7	1000	120.0	292.0	V	90	13
80.722	22.83	30.0	7.2	1000	120.0	400.0	V	303	8
425.028	25.20	36.0	10.8	1000	120.0	293.0	H	41	19

12.13 Spurious emissions radiated 1 GHz to 40 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations from 1 GHz to 40 GHz.

Measurement:

Measurement parameter	
Detector:	Quasi Peak below 1 GHz (alternative Peak) Peak above 1 GHz / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	1 GHz to 40 GHz
Trace mode:	Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 %
Test setup:	See sub clause 7.2 – B See sub clause 7.3 – A
Measurement uncertainty:	See chapter 9

Limits:

TX Spurious Emissions Radiated		
§15.209 / RSS-247		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

Results: 20 MHz channel bandwidth

TX Spurious Emissions Radiated [dB μ V/m] / dBm								
U-NII-1 (5150 MHz to 5250 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
-/-			-/-			-/-		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dB μ V/m] / dBm								
U-NII-2A (5250 MHz to 5350 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
-/-			-/-			-/-		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dB μ V/m] / dBm								
U-NII-2C (5470 MHz to 5725 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
-/-			-/-			-/-		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dB μ V/m] / dBm								
U-NII-3 (5725 MHz to 5850 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
-/-			-/-			-/-		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

Results: 40 MHz channel bandwidth

TX Spurious Emissions Radiated [dBμV/m] / dBm								
U-NII-1 (5150 MHz to 5250 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBμV/m] / dBm								
U-NII-2A (5250 MHz to 5350 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBμV/m] / dBm								
U-NII-2C (5470 MHz to 5725 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBμV/m] / dBm								
U-NII-3 (5725 MHz to 5850 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

Results: 80 MHz channel bandwidth

TX Spurious Emissions Radiated [dB μ V/m] / dBm		
U-NII-1 (5150 MHz to 5250 MHz)		
Middle channel		
F [MHz]	Detector	Level [dB μ V/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		


TX Spurious Emissions Radiated [dB μ V/m] / dBm		
U-NII-2A (5250 MHz to 5350 MHz)		
Middle channel		
F [MHz]	Detector	Level [dB μ V/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dB μ V/m] / dBm					
U-NII-2C (5470 MHz to 5725 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		


TX Spurious Emissions Radiated [dB μ V/m] / dBm		
U-NII-3 (5725 MHz to 5850 MHz)		
Middle channel		
F [MHz]	Detector	Level [dB μ V/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		

Plots: 20 MHz channel bandwidth


Plot 1: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

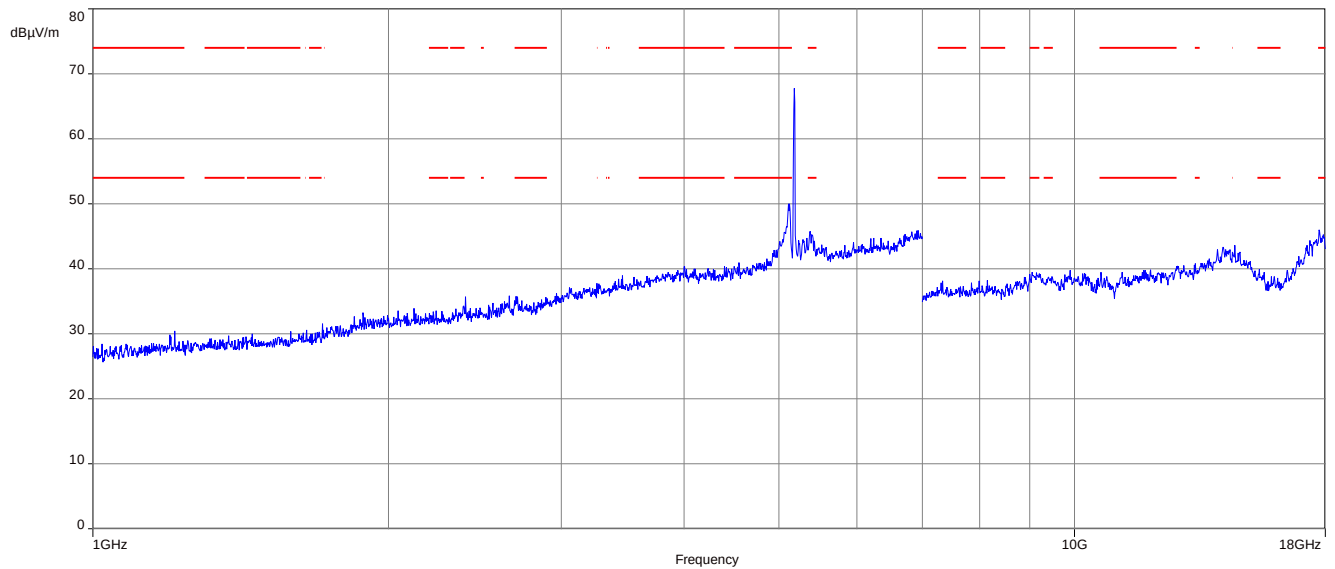


Plot 2: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; middle channel

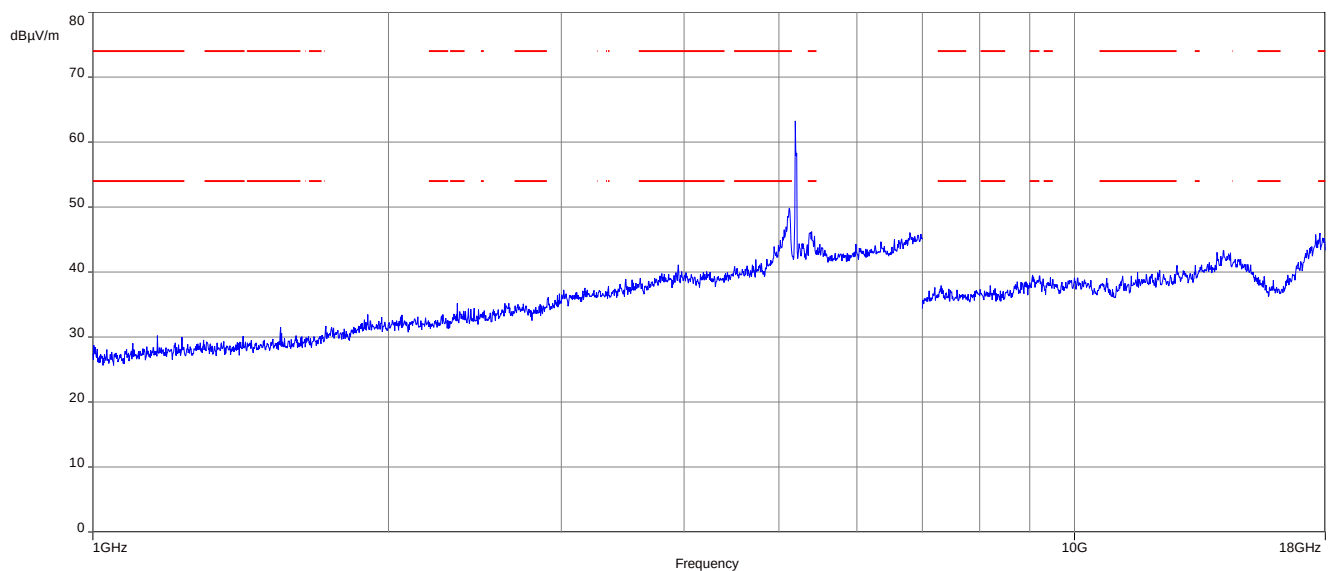


Plot 3: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel

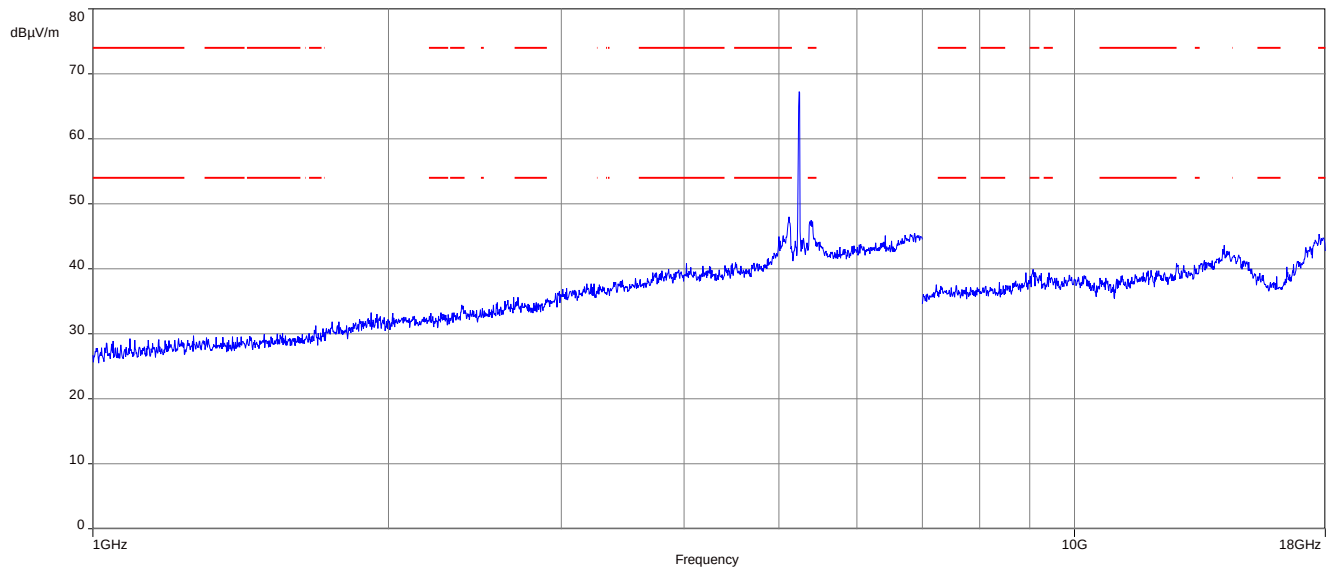


Plot 4: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; lowest channel

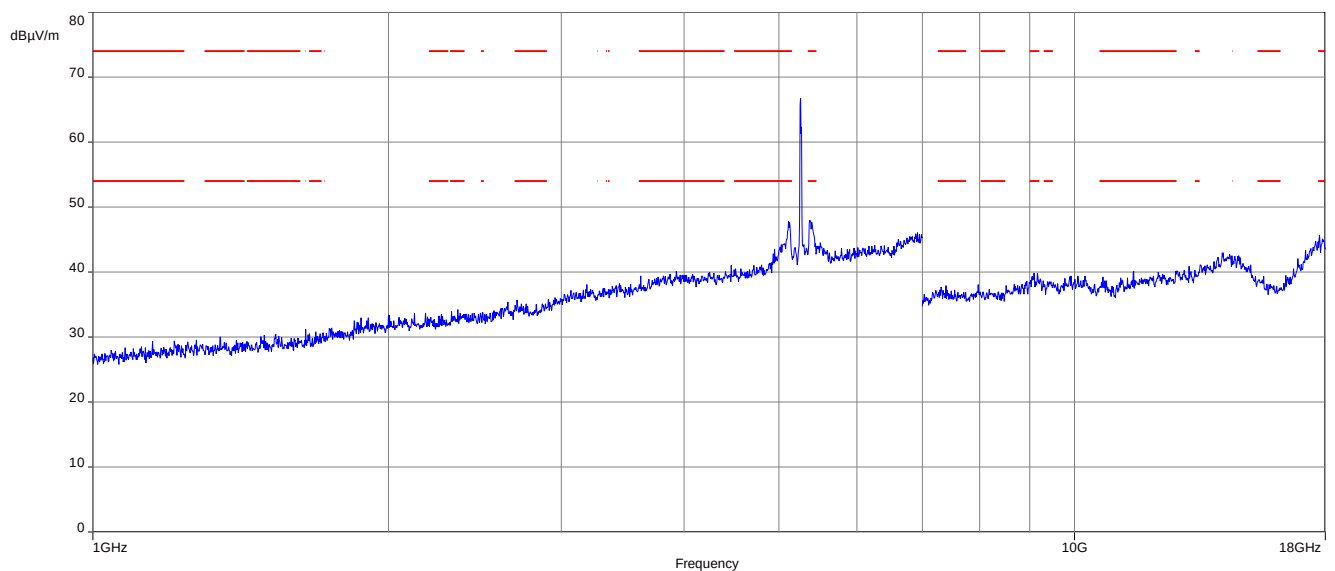


Plot 5: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; middle channel

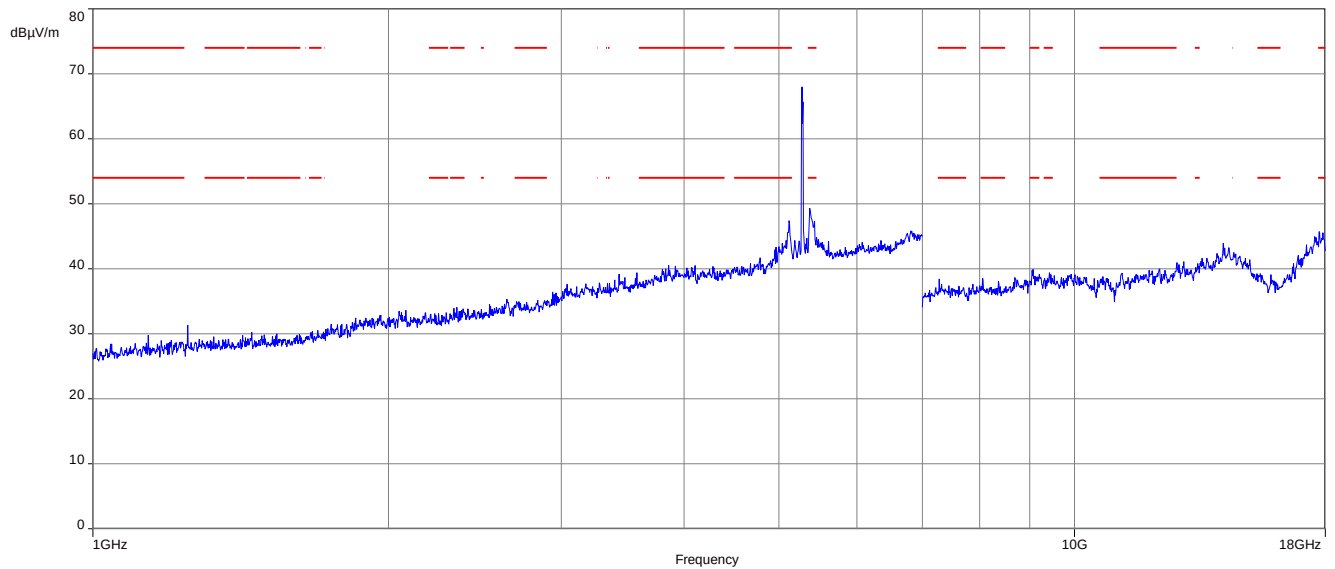


Plot 6: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; highest channel

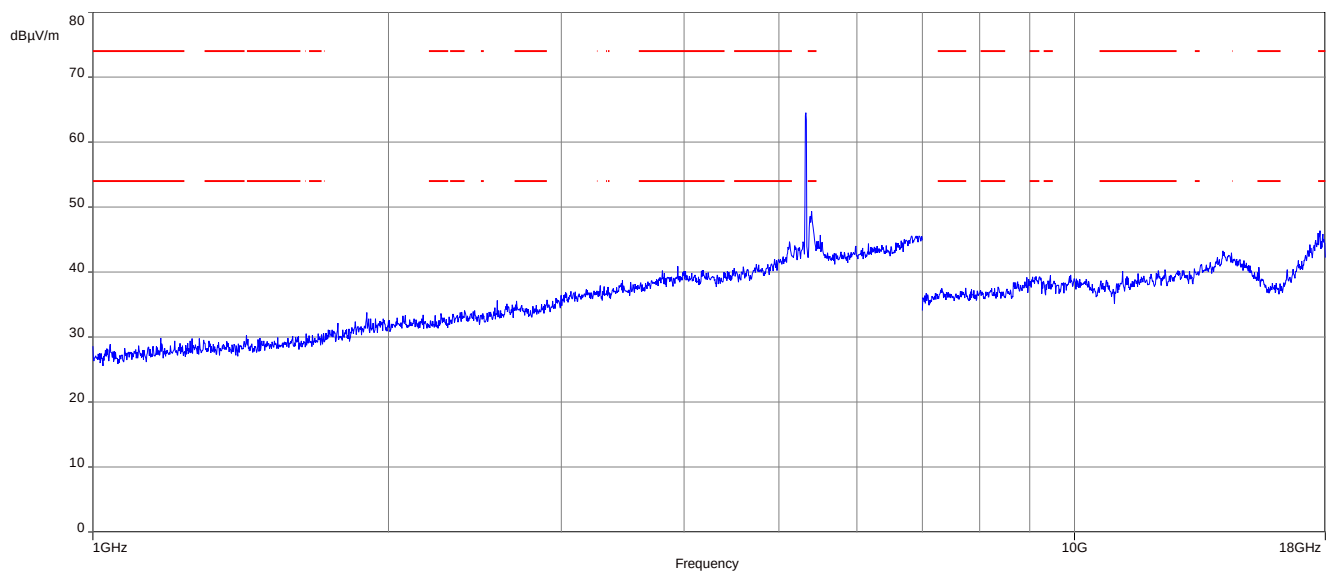


Plot 7: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

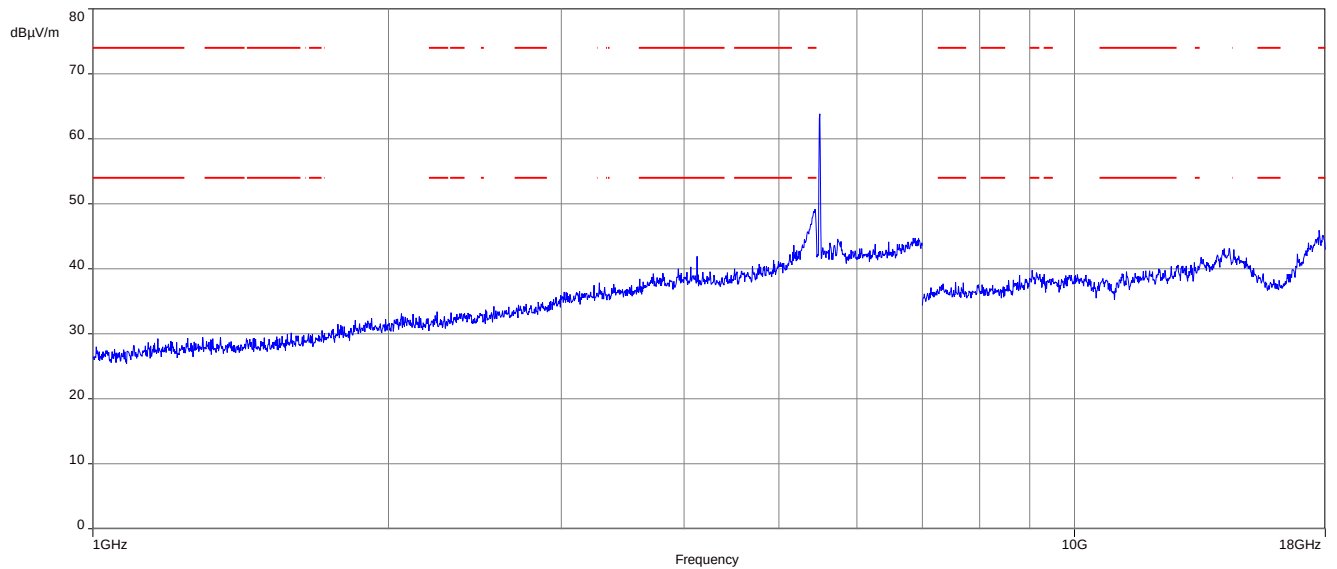


Plot 8: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel

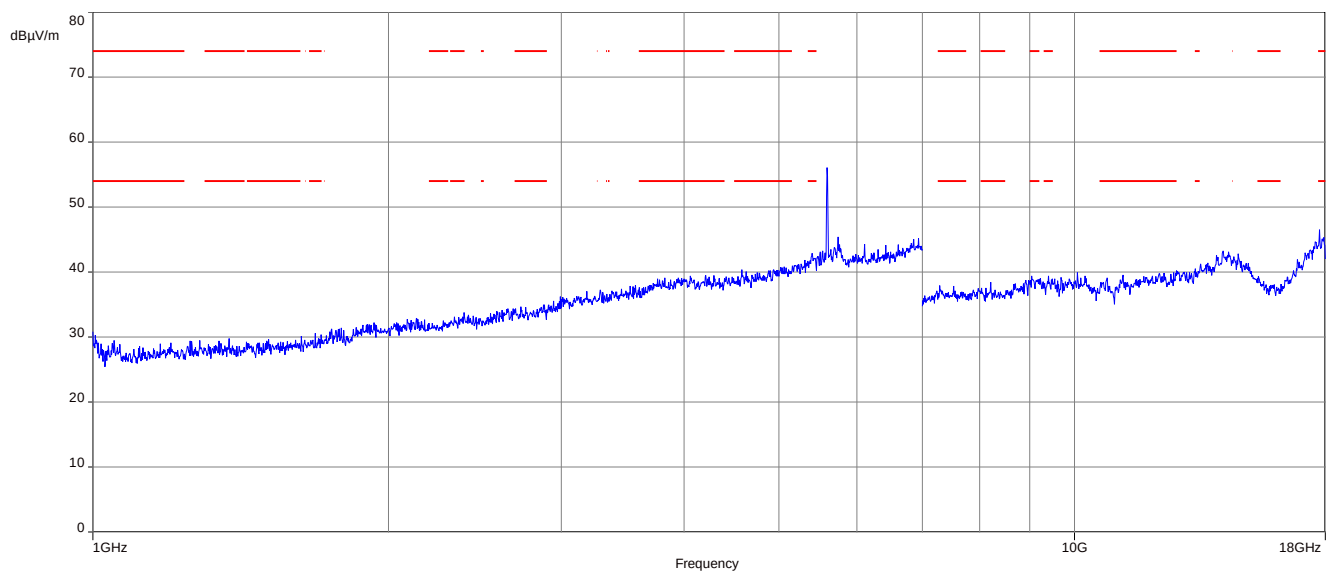


Plot 9: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

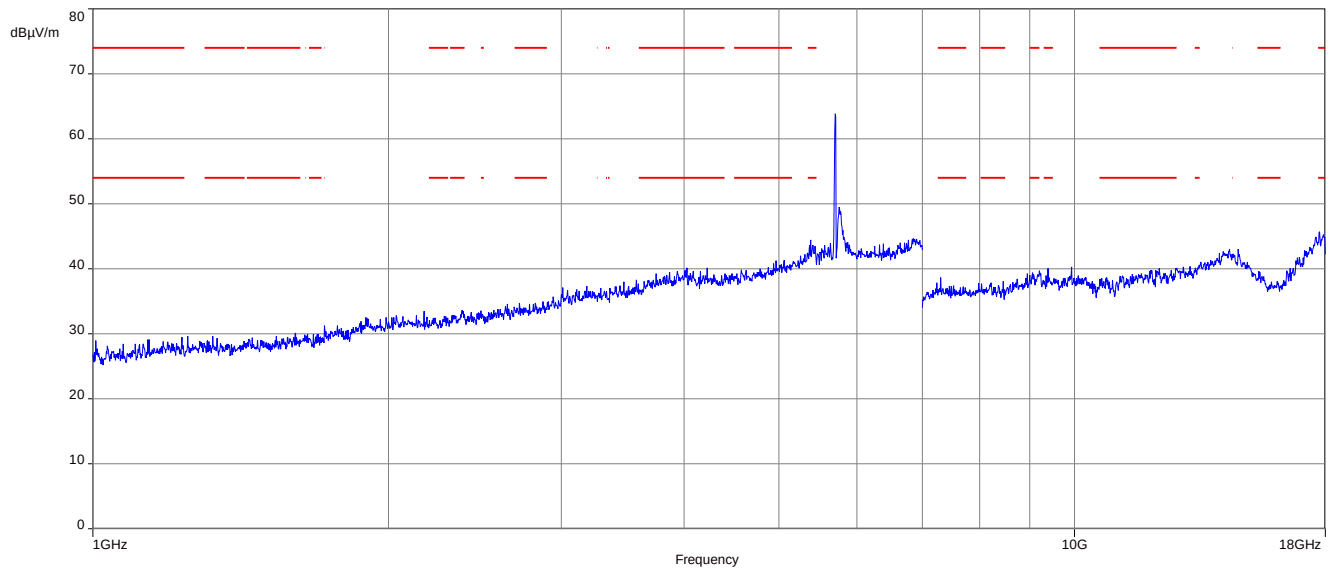


Plot 10: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

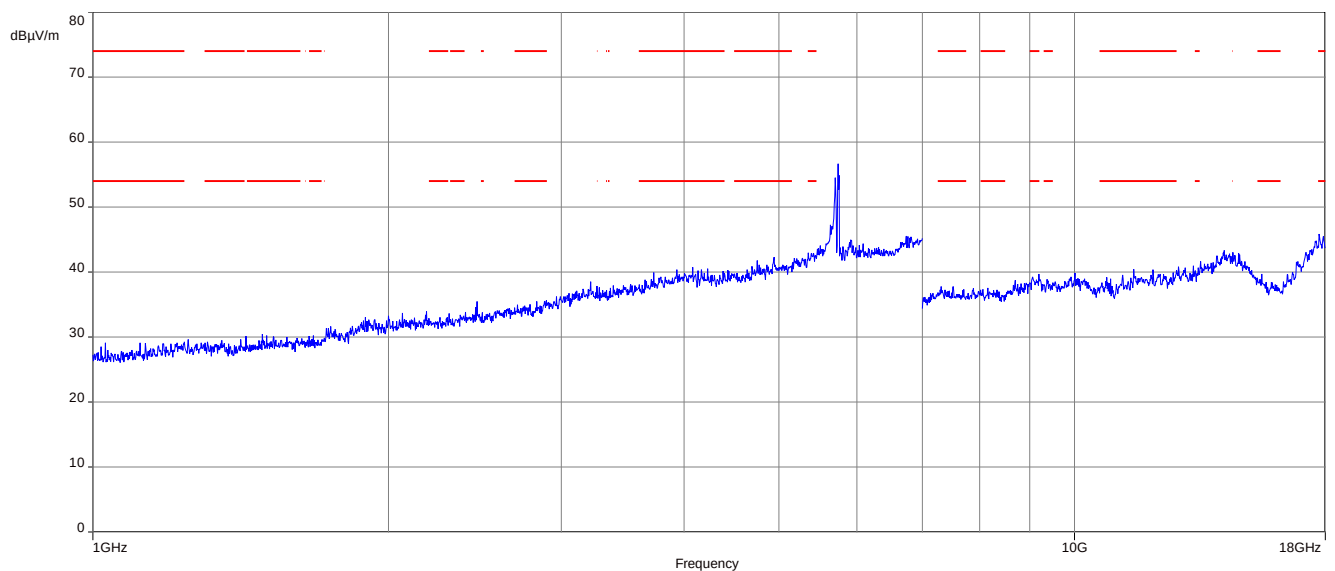

Plot 11: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; middle channel

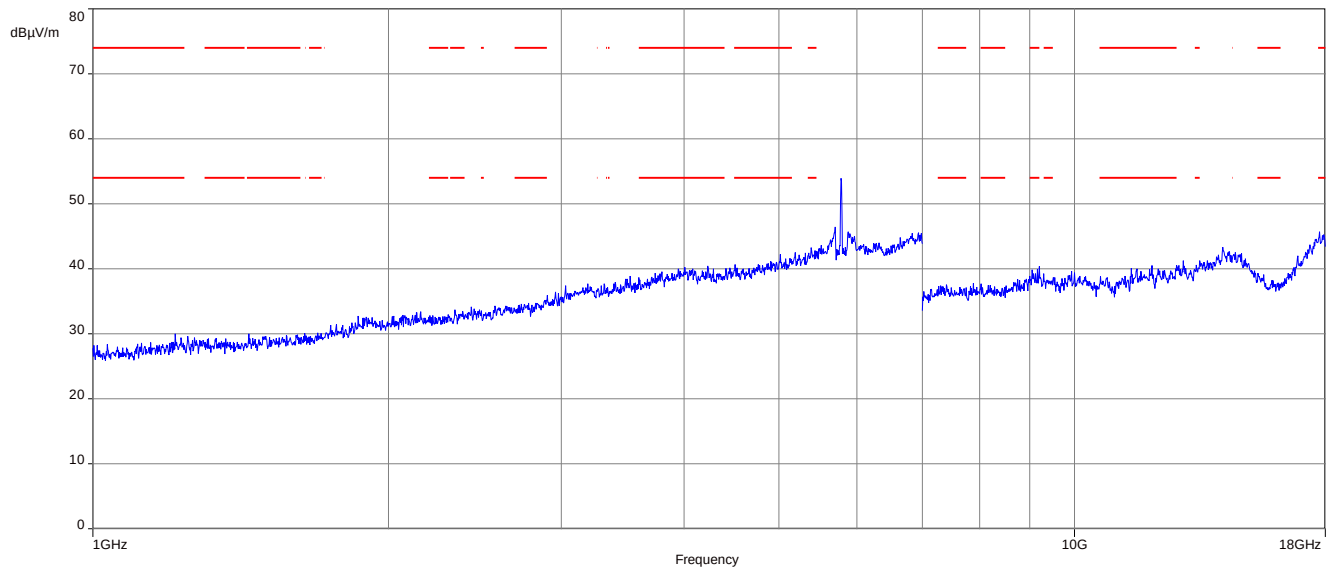


Plot 12: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel

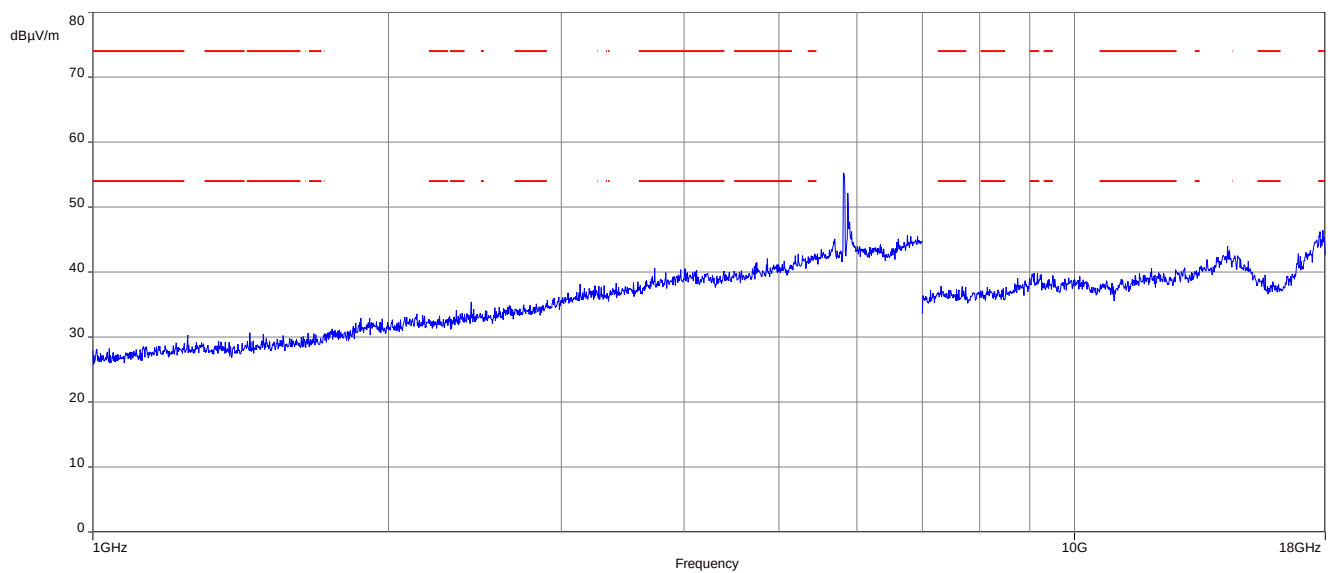




Plots: 40 MHz channel bandwidth


Plot 1: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

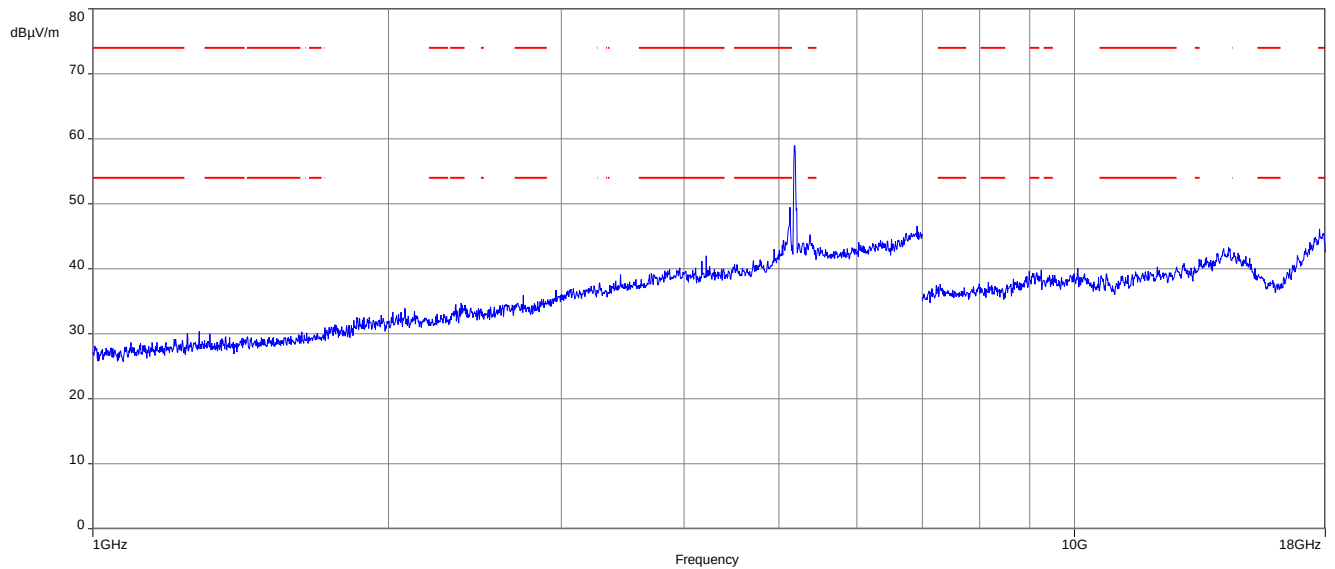


Plot 2: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel

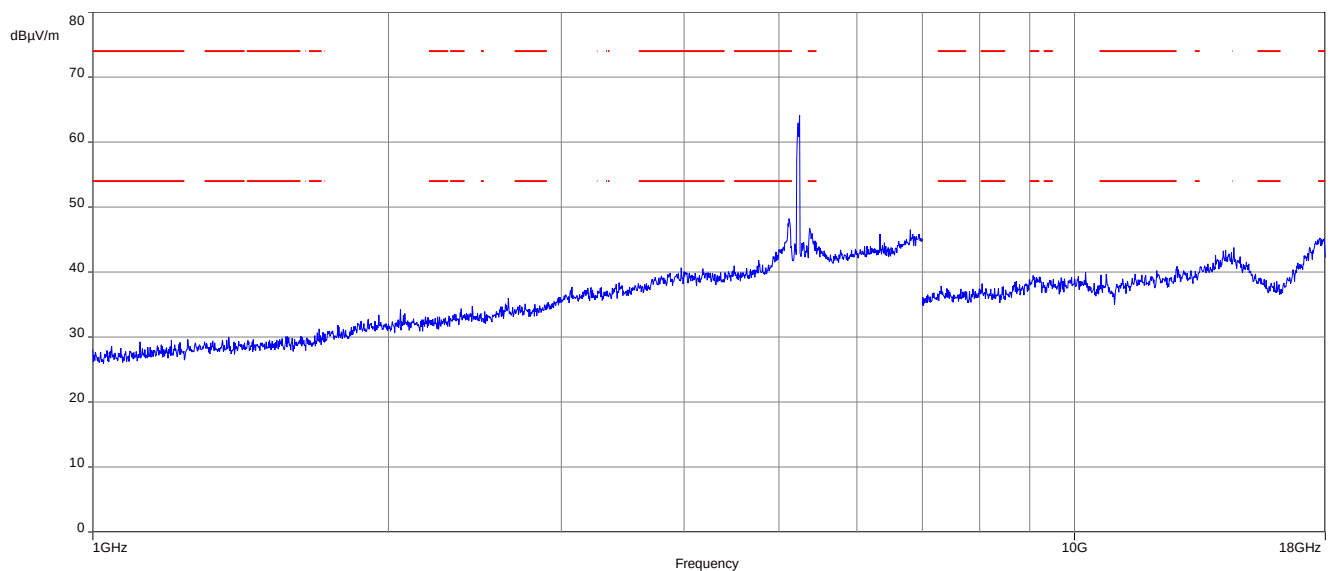


Plot 3: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; lowest channel

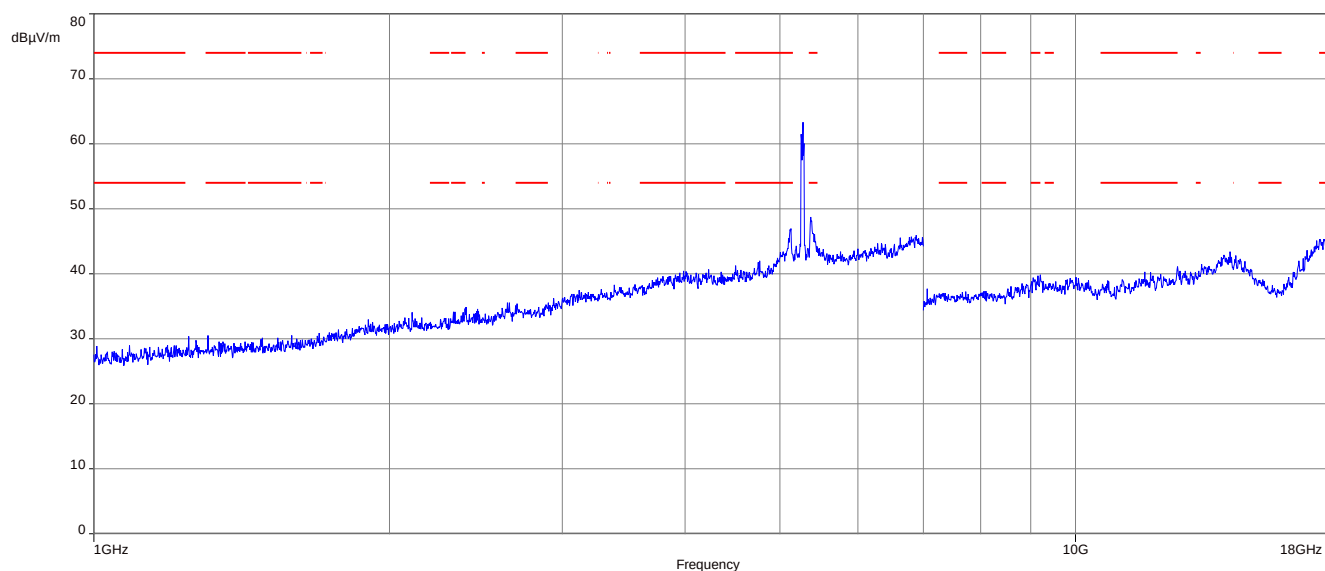


Plot 4: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; highest channel

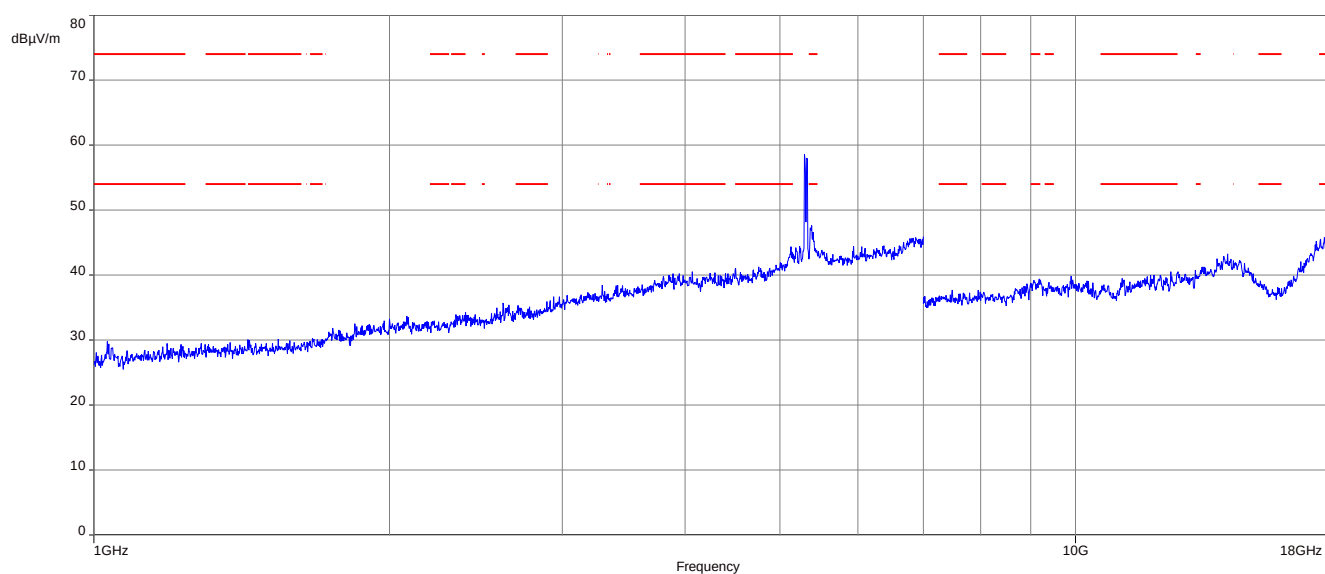


Plot 5: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

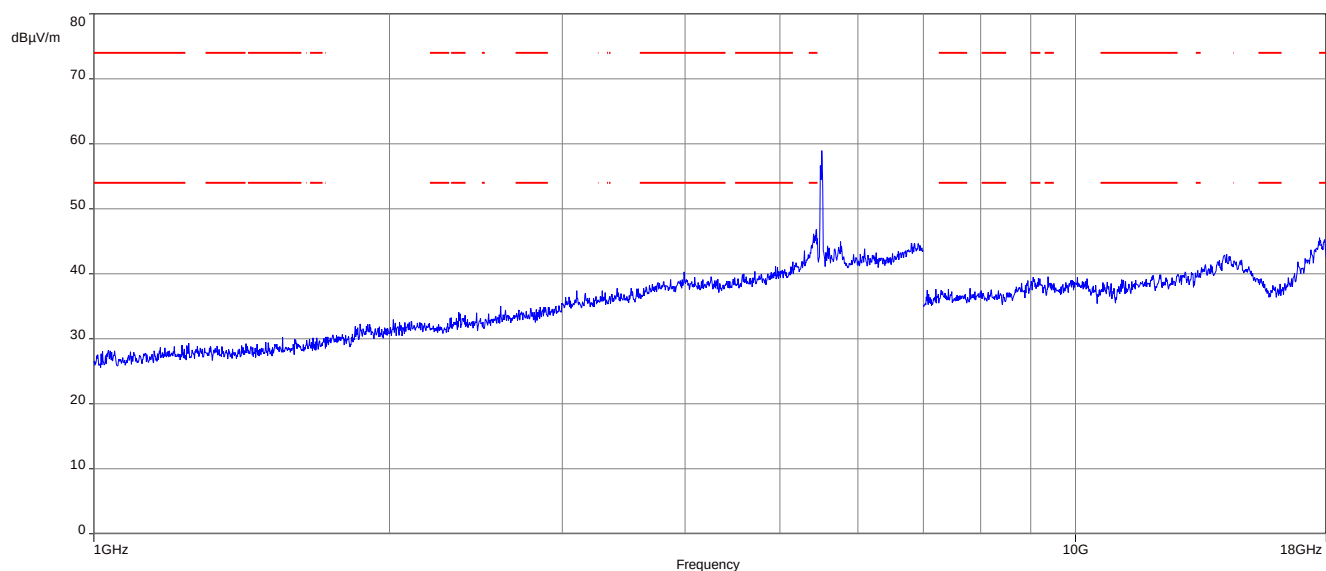


Plot 6: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel

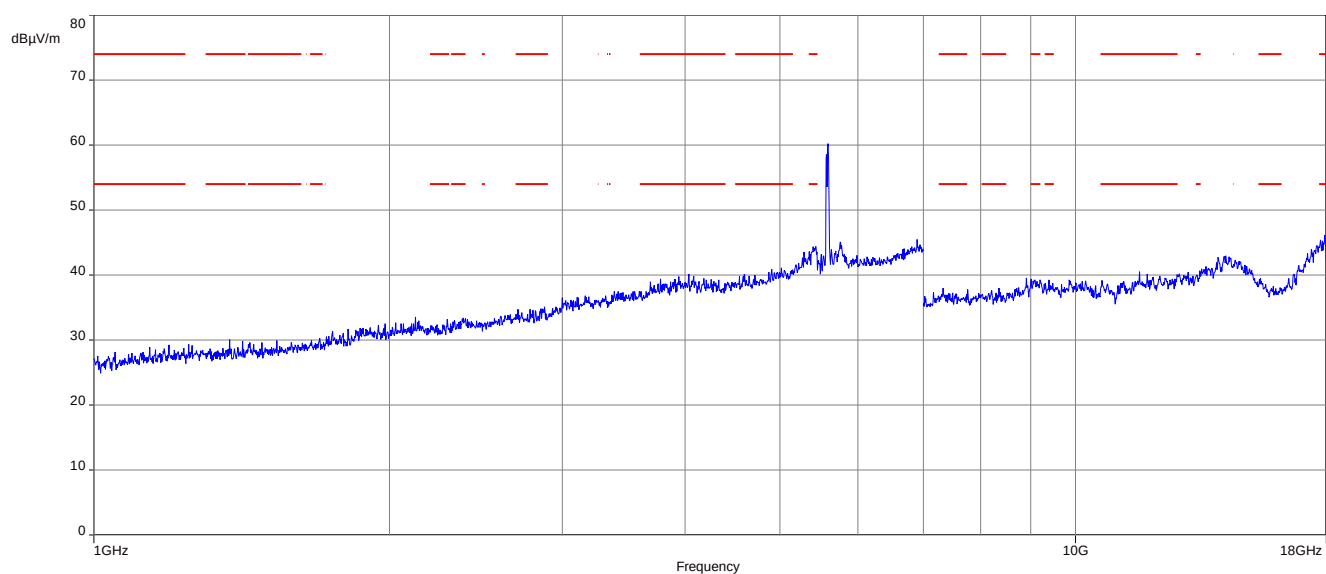


Plot 7: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

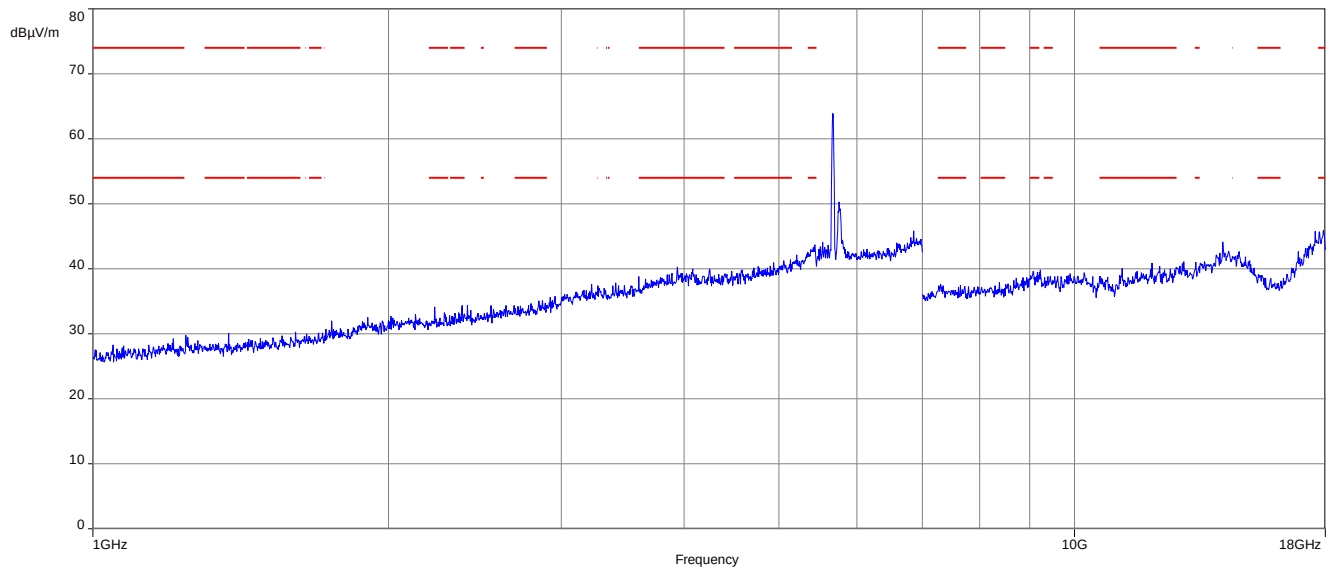


Plot 8: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

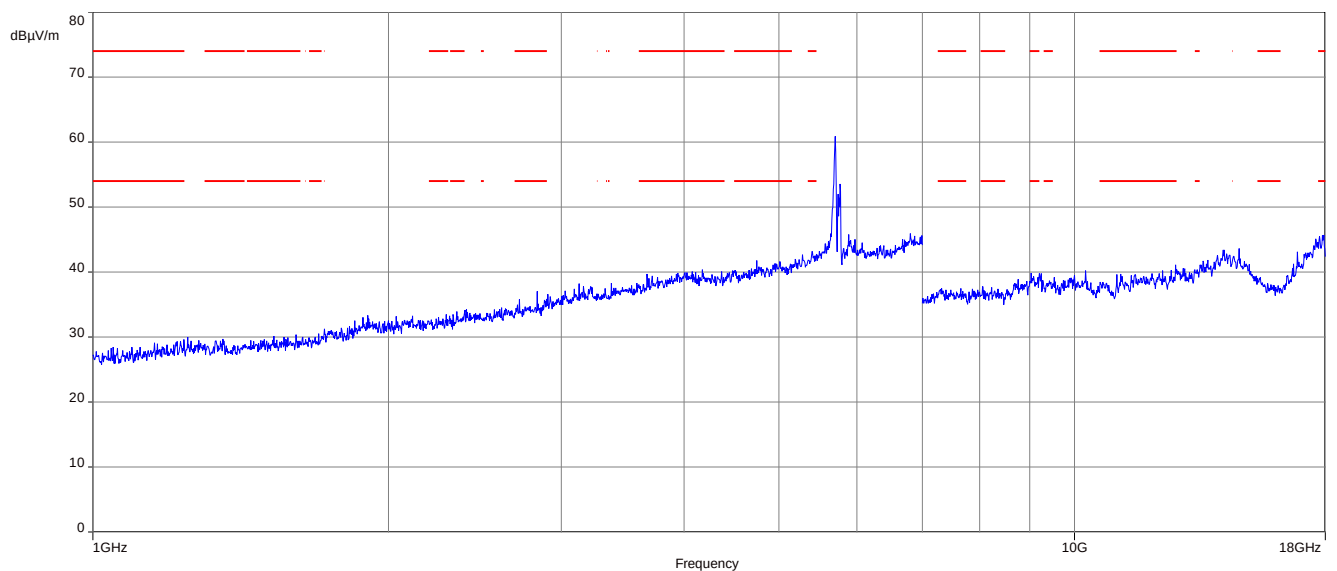

Plot 9: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel

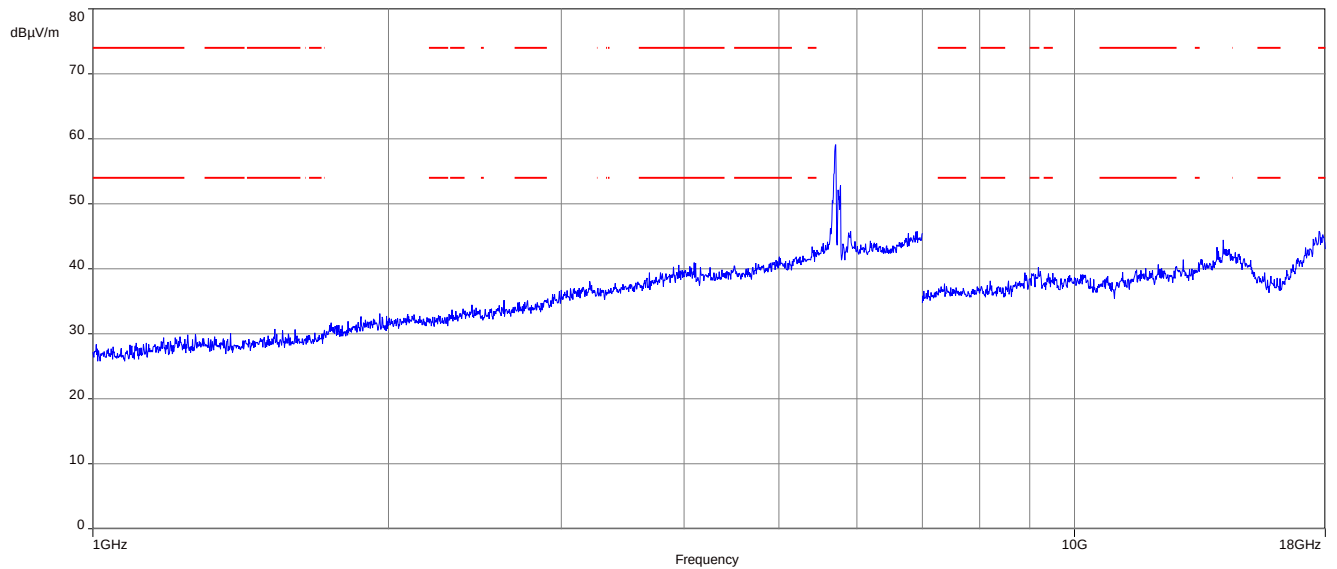


Plot 10: 18 GHz to 40 GHz; vertical & horizontal polarization; all channels (Max Hold)

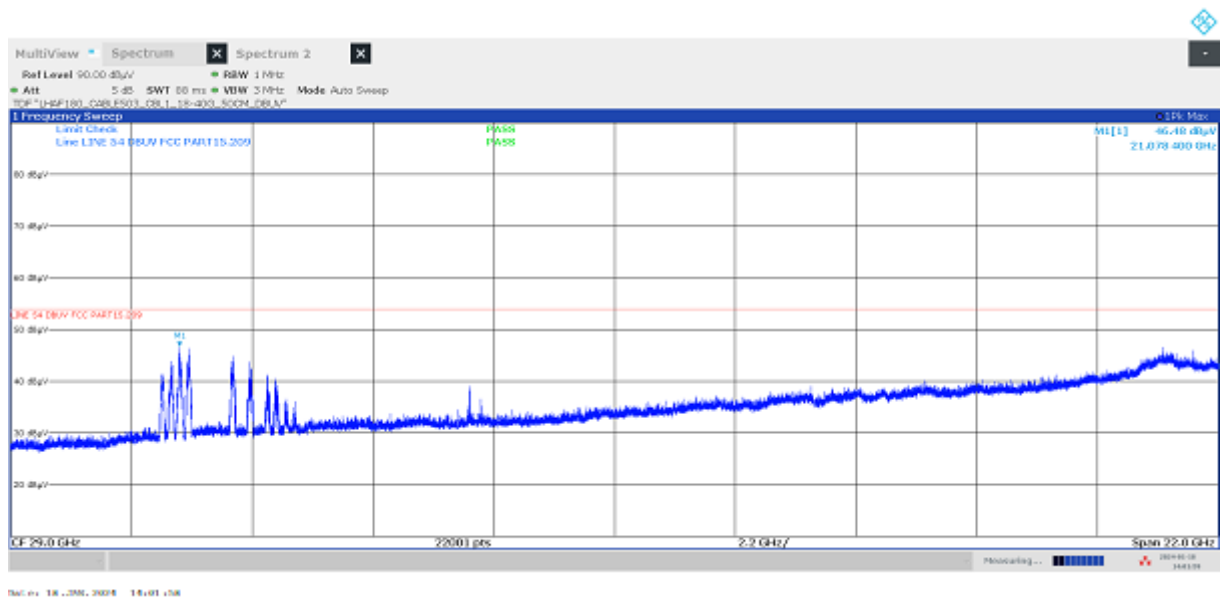


Plots: 80 MHz channel bandwidth


Plot 1: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; middle channel

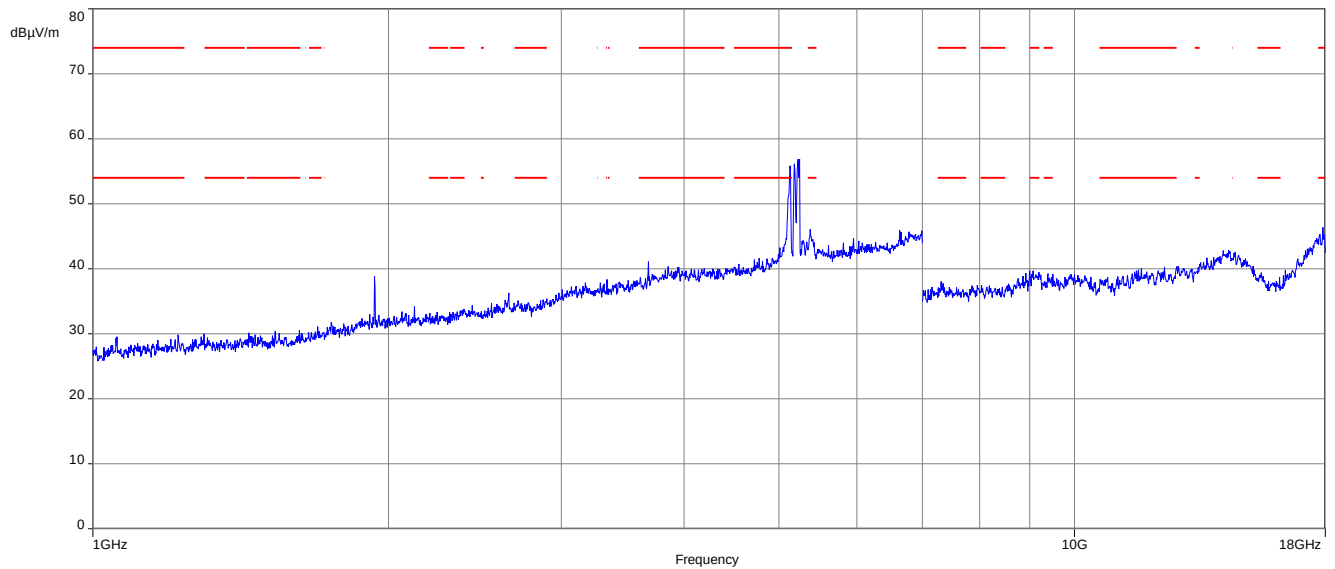


Plot 2: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; middle channel

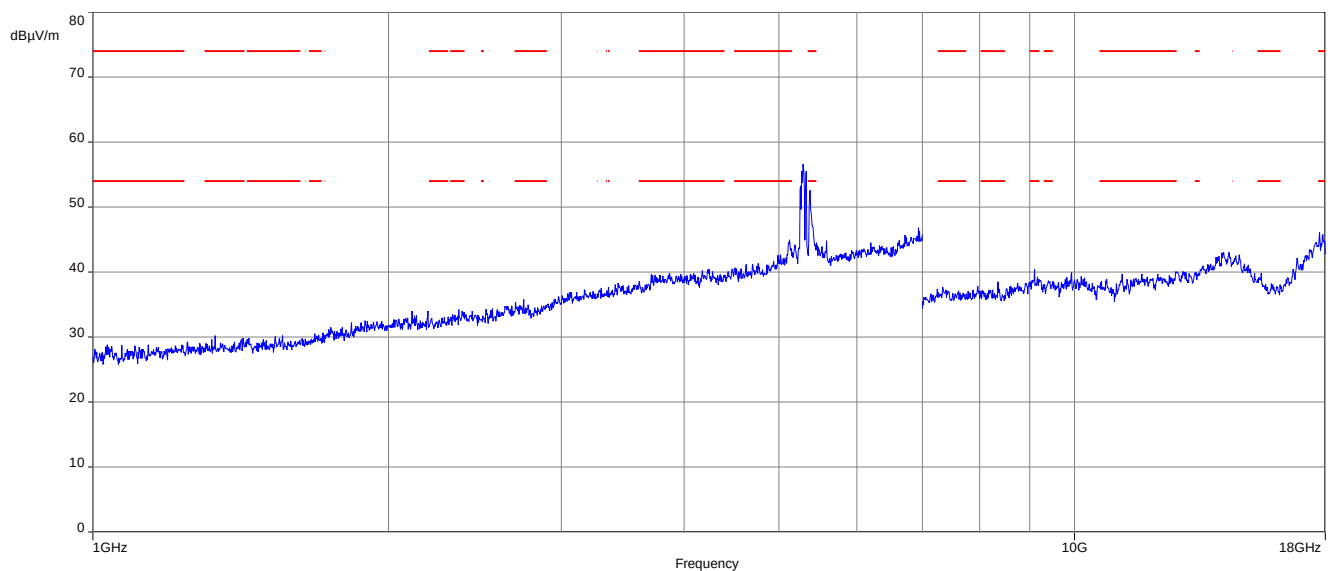


Plot 3: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

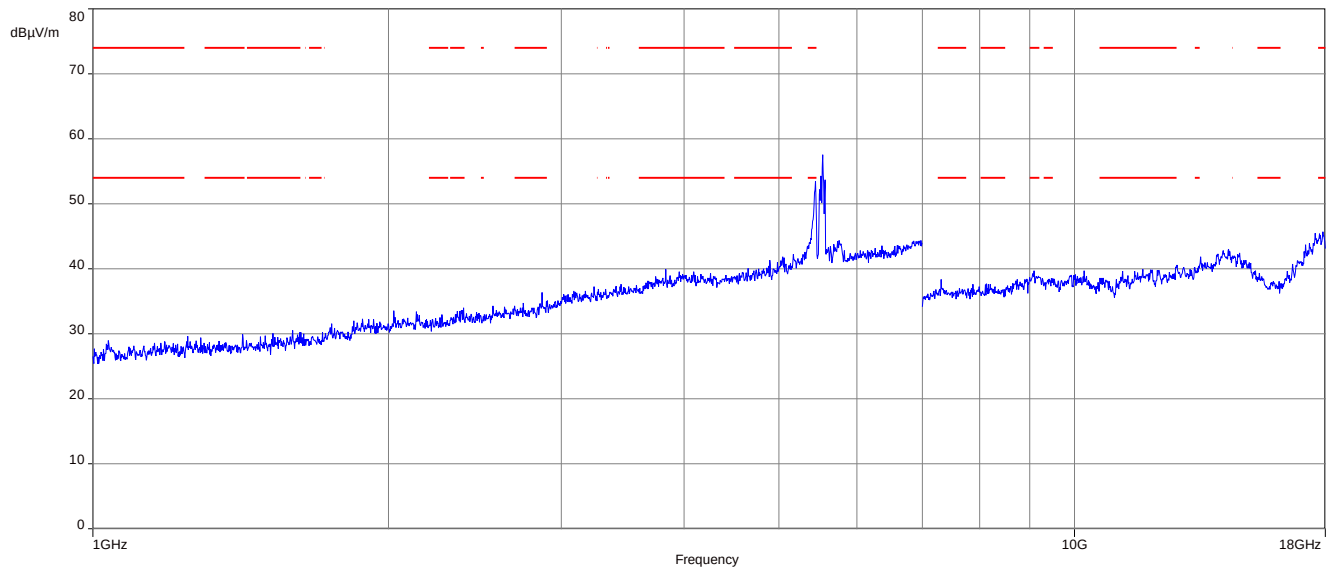


Plot 4: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

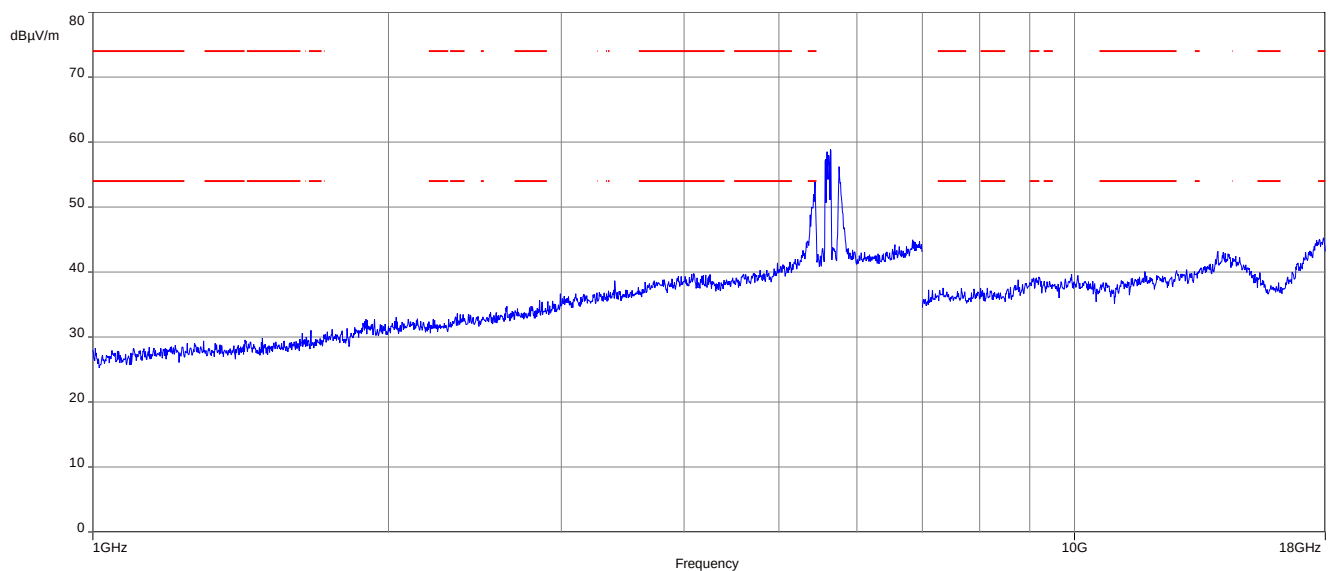

Plot 5: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; middle channel

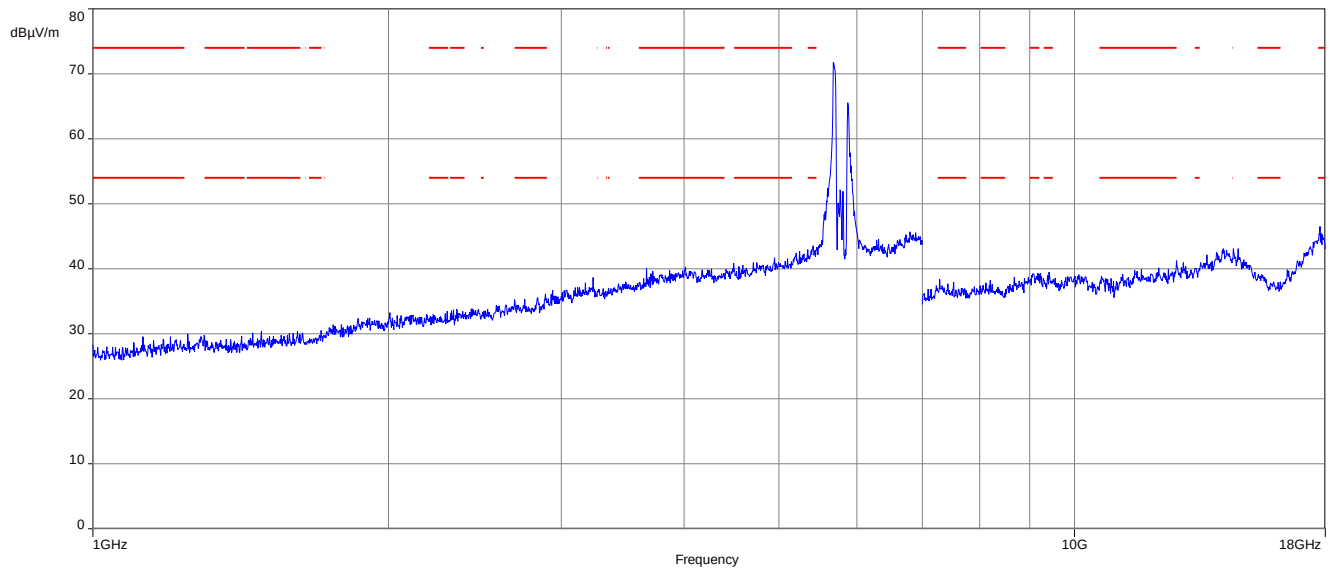

Plot 6: 18 GHz to 40 GHz; vertical & horizontal polarization; all channel (Max Hold)

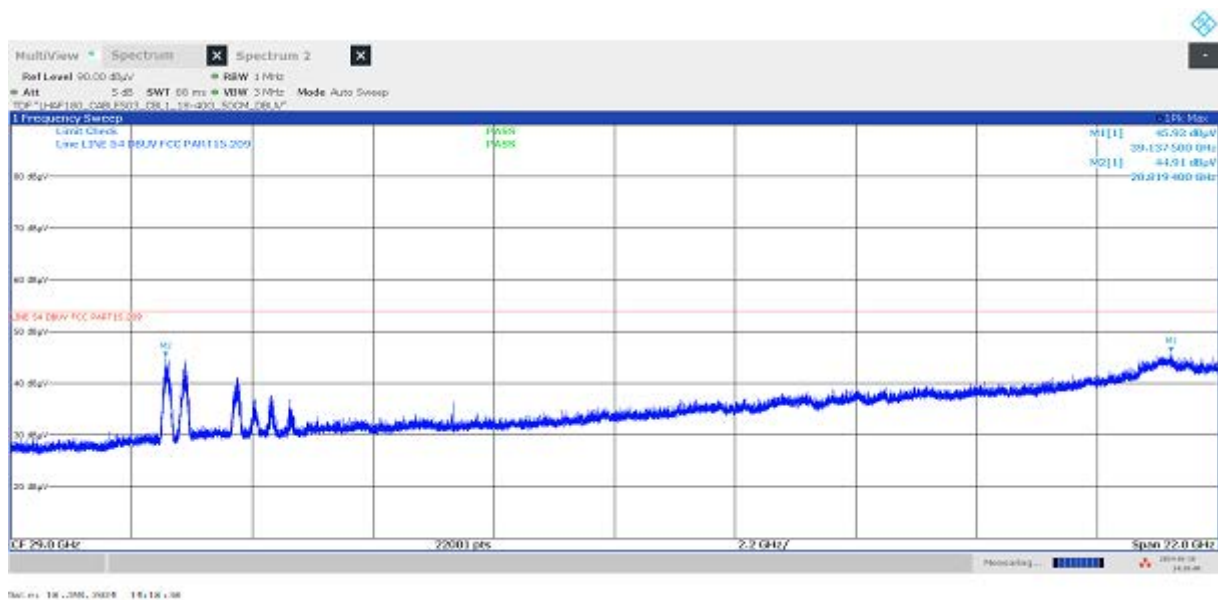

12.14 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel. If critical peaks are found the lowest channel and the highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	9 kHz
Resolution bandwidth:	100 kHz
Span:	150 kHz to 30 MHz
Trace mode:	Max Hold
Test setup:	See sub clause 6.4 – A
Measurement uncertainty:	See chapter 9


Limits:

Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50


*Decreases with the logarithm of the frequency

Results:

Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
All detected emissions are more than 20 dB below the limit.		

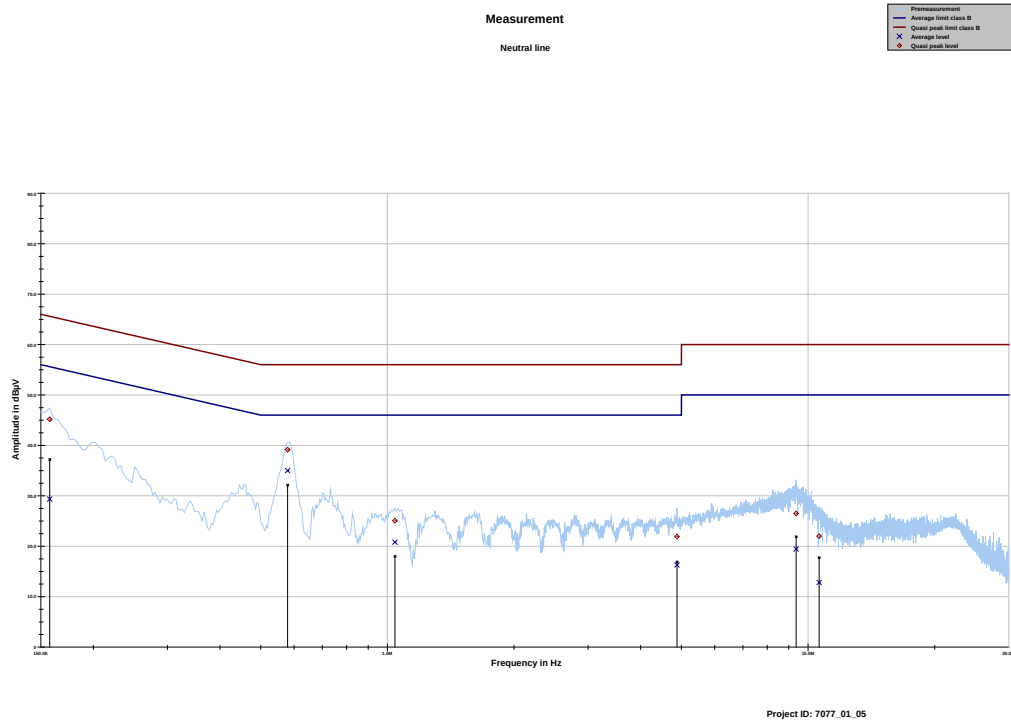Plots:**Plot 1:** 150 kHz to 30 MHz, neutral line

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.157463	45.18	20.42	65.597	29.34	26.45	55.787
0.579094	39.15	16.85	56.000	34.99	11.01	46.000
1.041769	25.06	30.94	56.000	20.80	25.20	46.000
4.881225	21.91	34.09	56.000	16.28	29.72	46.000
9.369919	26.49	33.51	60.000	19.42	30.58	50.000
10.623619	22.00	38.00	60.000	12.80	37.20	50.000

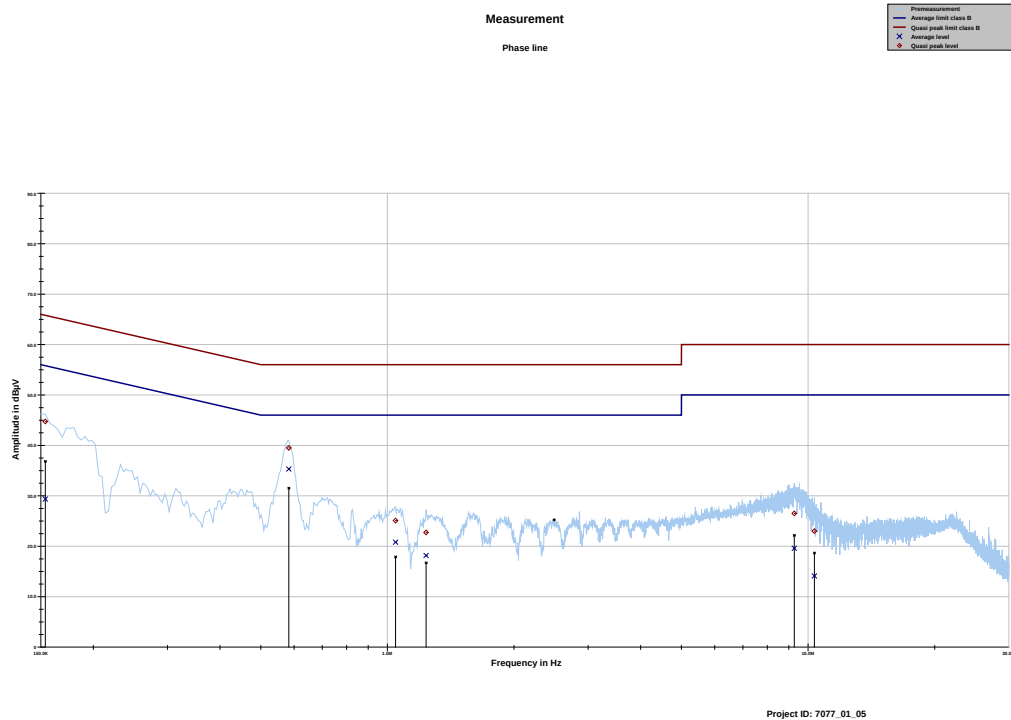Plot 2: 150 kHz to 30 MHz, phase line

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.153731	44.74	21.05	65.796	29.34	26.55	55.893
0.582825	39.49	16.51	56.000	35.31	10.69	46.000
1.045500	25.07	30.93	56.000	20.79	25.21	46.000
1.235794	22.73	33.27	56.000	18.16	27.84	46.000
9.272906	26.50	33.50	60.000	19.59	30.41	50.000
10.351237	22.99	37.01	60.000	14.10	35.90	50.000

13 Observations

No observations except those reported with the single test cases have been made.

14 Glossary

AVG	Average
C	Compliant
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz
CW	Clean wave
DC	Duty cycle
DFS	Dynamic frequency selection
DSSS	Dynamic sequence spread spectrum
DUT	Device under test
EMC	Electromagnetic Compatibility
EUT	Equipment under test
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
FVIN	Firmware version identification number
HMN	Host marketing name
HVIN	Hardware version identification number
HW	Hardware
IC	Industry Canada
Inv. No.	Inventory number
MC	Modulated carrier
NA	Not applicable
NC	Not compliant
NOP	Non occupancy period
NP	Not performed
OBW	Occupied bandwidth
OC	Operating channel
OCW	Operating channel bandwidth
OFDM	Orthogonal frequency division multiplexing
OOB	Out of band
OP	Occupancy period
PER	Packet error rate
PMN	Product marketing name
PP	Positive peak
QP	Quasi peak
RLAN	Radio local area network
S/N or SN	Serial number
SW	Software
UUT	Unit under test
WLAN	Wireless local area network

15 Document history

Version	Applied changes	Date of release
-/-	Initial release	2024-01-31
R2	Typo in result table	2024-03-19

END OF TEST REPORT