



LCIE

WIFI 2,4GHz Template: Release October 10th, 2016

TEST REPORT

N°: 146019-698067C

Version : 01

Subject

Radio spectrum matters
tests according to standards:
47 CFR Part 15.247 [P](#)

Issued to

SAGEMCOM BROADBAND SAS
250 Route de l' Empereur
92500 - RUEIL MALMAISON
FRANCE

Apparatus under test

- ↳ Product
- ↳ Trade mark
- ↳ Manufacturer
- ↳ Model under test
- ↳ Serial number
- ↳ FCC ID

DCIWA384 UHD Alt US
SAGEMCOM
SAGEMCOM
MiniBox (253697290)
616476080862
VW3DCIWA384

Test date

: December 5, 2016 to January 20, 2017

Test location

Fontenay Aux Roses & Ecuelles

Composition of document

114 pages

Document issued on

February 13, 2017

Written by :
Mathieu CERISIER
Tests operator



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measurement. This document doesn't anticipate any certification decision.

LCIE

Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

33, Av du Général Leclerc
92266 Fontenay Aux Roses
FRANCE

Tél : +33 1 40 95 60 60
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	January 31, 2017	Mathieu CERISIER	Creation of the document



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH.....	13
4.	6DB EMISSION BANDWIDTH	19
5.	DUTY CYCLE	25
6.	MAXIMUM CONDUCTED OUTPUT POWER	30
7.	POWER SPECTRAL DENSITY	45
8.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE	60
9.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	66
10.	AC POWER LINE CONDUCTED EMISSIONS.....	74
11.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS	83
12.	UNCERTAINTIES CHART	114

1. TEST PROGRAM

References

- 47 CFR Part 15.247
- KDB 558074 D01 DTS Meas Guidance v03r05
- KDB 662911 D01 Multiple Transmitter Output v02r01
- ANSI C63.10-2013

Radio requirement:

Clause (47CFR Part 15.247) Test Description	Test result - Comments			
Occupied Bandwidth P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
6dB Bandwidth P	☒ PASS	☐ FAIL	☐ NA()	☐ NP(1)
Duty Cycle P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Maximum Conducted Output Power P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Power Spectral Density P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Conducted Spurious Emission at the Band Edge P	☒ PASS	☐ FAIL	☐ NA()	☐ NP(1)
Unwanted Emissions into Non-Restricted Frequency Bands P	☒ PASS	☐ FAIL	☐ NA()	☐ NP(1)
AC Power Line Conducted Emission P	☒ PASS	☐ FAIL	☐ NA(2)	☐ NP(1)
Unwanted Emissions into Restricted Frequency Bands P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Receiver Radiated emissions P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.				

(1): Limited program

(2): EUT not directly or indirectly connected to the AC Power Public Network

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

SAGEMCOM MiniBox (253697290)

Serial Number: 616476080862



Equipment Under Test



Equipment Under Test

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
1	Power supply	1	☒	☐	☒	-
2	Ethernet	2.5	☐	☒	☐	-

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop	-	-	Use to set the EUT
Power supply°1	MSA-Z3800IC12.0-48W-P	191360131-XX	-
Power supply°2	NBS42C120380M2	191357366-XX	-
Power supply°3	LPL-C64612038026	191359307-XX	-

Equipment information:

Type:	WIFI			
Frequency band:	2400MHz-2483.5MHz			
Standard:	☒ 802.11b	☒ 802.11g	☒ 802.11n HT20	☒ 802.11n HT40
Spectrum Modulation:	☒ DSSS		☒ OFDM	
Number of Channel:	11			
Spacing channel:	5MHz			
Channel bandwidth:	☒ 20MHz		☒ 40MHz	
Antenna Type:	☒ Integral		☐ External	☐ Dedicated
Antenna connector:	☒ Yes		☐ No	☐ Temporary for test
Transmit chains:	☐ 1	☐ 2	☒ 3	☐ 4
Beam forming gain:	☐ Yes: XdB		☒ No	
Receiver chains:	☐ 1	☐ 2	☒ 3	☐ 4
Type of equipment:	☒ Stand-alone		☐ Plug-in	☐ Combined
Ad-Hoc mode:	☐ Yes		☒ No	
Duty cycle:	☒ Continuous duty		☐ Intermittent duty	☐ 100% duty
Operating temperature range:	Tmin:	☐ -20°C	☒ 0°C	☐ X°C
	Tnom:	20°C		
	Tmax:	☐ 35°C	☐ 55°C	☒ 45°C
Type of power source:	☒ AC power supply		☐ DC power supply	☐ Battery
Operating voltage range:	Vnom:		☒ 120V/60Hz	☐ X Vdc

Antenna Characteristic			
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
1	0.2	2412-2472	50
2	0.2	2412-2472	50
3	0.2	2412-2472	50
Accumulated	5.0	2412-2472	50

Note: Calculated according to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) d) (i). All antennas can transmit simultaneously

CHANNEL PLAN	
802.11b / 802.11g / 802.11n HT20	
Channel	Frequency (MHz)
Cmin: 1	2412
2	2417
3	2422
4	2427
5	2432
Cmid: 6	2437
7	2442
8	2447
9	2452
10	2457
Cmax: 11	2462

CHANNEL PLAN	
802.11n HT40	
Channel	Frequency (MHz)
Cmin: 3	2422
4	2427
5	2432
Cmid: 6	2437
7	2442
8	2447
Cmax: 9	2452

DATA RATE		
802.11b		
Data Rate (Mbps)	Modulation Type	Modulation Worst Case
1	DBPSK	☒
2	DQPSK	☐
5.5	DQPSK	☐
11	CCK	☐

DATA RATE		
802.11g		
Data Rate (Mbps)	Modulation Type	Modulation Worst Case
6	BPSK	☒
9	BPSK	☐
12	QPSK	☐
18	QPSK	☐
24	16-QAM	☐
36	16-QAM	☐
48	64-QAM	☐
54	64-QAM	☐



LCIE

DATA RATE									
802.11n HT20									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				6.5	7.2	☐
	1	1	QPSK				13	14.4	☐
	2	1	QPSK				19.5	21.7	☐
	3	1	16-QAM				26	28.9	☐
	4	1	16-QAM				39	43.3	☐
	5	1	64-QAM				52	57.8	☐
	6	1	64-QAM				58.5	65	☐
	7	1	64-QAM				65	72.2	☐
☑	32	1	BPSK	-	-	-	-	-	☐
	8	2	BPSK				13	14.4	☐
	9	2	QPSK				26	28.9	☐
	10	2	QPSK				39	43.3	☐
	11	2	16-QAM				52	57.8	☐
	12	2	16-QAM				78	86.7	☐
	13	2	64-QAM				104	115.6	☐
	14	2	64-QAM				117	130.3	☐
	15	2	64-QAM				130	144.4	☐
	33	2	16-QAM	QPSK	-	-	39	43.3	☐
	34	2	64-QAM	QPSK	-	-	52	57.8	☐
	35	2	64-QAM	16-QAM	-	-	65	72.2	☐
	36	2	16-QAM	QPSK	-	-	58.5	65	☐
	37	2	64-QAM	QPSK	-	-	78	86.7	☐
	38	2	64-QAM	16-QAM	-	-	97.5	108.3	☐
☑	16	3	BPSK				19.5	21.7	☒
	17	3	QPSK				39	43.3	☐
	18	3	QPSK				58.5	65	☐
	19	3	16-QAM				78	86.7	☐
	20	3	16-QAM				117	130	☐
	21	3	64-QAM				156	173.3	☐
	22	3	64-QAM				175.5	195	☐
	23	3	64-QAM				195	216.7	☐
	39	3	16-QAM	QPSK	QPSK	-	52	57.8	☐
	40	3	16-QAM	16-QAM	QPSK	-	65	72.2	☐
	41	3	64-QAM	QPSK	QPSK	-	65	72.2	☐
	42	3	64-QAM	16-QAM	QPSK	-	78	86.7	☐
	43	3	64-QAM	16-QAM	16-QAM	-	91	101.1	☐
	44	3	64-QAM	64-QAM	QPSK	-	91	101.1	☐
	45	3	64-QAM	64-QAM	16-QAM	-	104	115.6	☐
	46	3	16-QAM	QPSK	QPSK	-	78	86.7	☐
	47	3	16-QAM	16-QAM	QPSK	-	97.5	108.3	☐
	48	3	64-QAM	QPSK	QPSK	-	97.5	108.3	☐
	49	3	64-QAM	16-QAM	QPSK	-	117	130	☐
	50	3	64-QAM	16-QAM	16-QAM	-	136.5	151.7	☐
	51	3	64-QAM	64-QAM	QPSK	-	136.5	151.7	☐
	52	3	64-QAM	64-QAM	16-QAM	-	156	173.3	☐
☐	24	4	BPSK				26	28.9	☐
	25	4	QPSK				52	57.8	☐
	26	4	QPSK				78	86.7	☐
	27	4	16-QAM				104	115.6	☐
	28	4	16-QAM				156	173.3	☐
	29	4	64-QAM				208	231.1	☐
	30	4	64-QAM				234	260	☐
	31	4	64-QAM				260	288.9	☐
	53	4	16-QAM	QPSK	QPSK	QPSK	65	72.2	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	78	86.7	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	91	101.1	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	78	86.7	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	91	101.1	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	104	115.6	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	117	130	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	104	115.6	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	117	130	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	130	144.4	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	130	144.4	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	143	158.9	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	97.5	108.3	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	117	130	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	136.5	151.7	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	117	130	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	136.5	151.7	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	156	173.3	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	175.5	195	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	156	173.3	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	175.5	195	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	195	216.7	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	195	216.7	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	214.5	238.3	☐



L C I E

DATA RATE									
802.11n HT40									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				13	15	☐
	1	1	QPSK				27	30	☐
	2	1	QPSK				40.5	45	☐
	3	1	16-QAM				54	60	☐
	4	1	16-QAM				81	90	☐
	5	1	64-QAM				108	120	☐
	6	1	64-QAM				121.5	135	☐
	7	1	64-QAM				135	150	☐
☑	32	1	BPSK	-	-	-	6.0	6.7	☐
	8	2	BPSK				27	30	☐
	9	2	QPSK				54	60	☐
	10	2	QPSK				81	90	☐
	11	2	16-QAM				108	120	☐
	12	2	16-QAM				162	180	☐
	13	2	64-QAM				216	240	☐
	14	2	64-QAM				243	270	☐
	15	2	64-QAM				270	300	☐
	33	2	16-QAM	QPSK	-	-	81	90.0	☐
	34	2	64-QAM	QPSK	-	-	108	120	☐
	35	2	64-QAM	16-QAM	-	-	135	150	☐
	36	2	16-QAM	QPSK	-	-	121.5	135	☐
	37	2	64-QAM	QPSK	-	-	162	180	☐
	38	2	64-QAM	16-QAM	-	-	202.5	225	☐
☑	16	3	BPSK				40.5	45	☒
	17	3	QPSK				81	90	☐
	18	3	QPSK				121.5	135	☐
	19	3	16-QAM				162	180	☐
	20	3	16-QAM				243	270	☐
	21	3	64-QAM				324	360	☐
	22	3	64-QAM				364.5	405	☐
	23	3	64-QAM				405	450	☐
	39	3	16-QAM	QPSK	QPSK	-	108	120	☐
	40	3	16-QAM	16-QAM	QPSK	-	135	150	☐
	41	3	64-QAM	QPSK	QPSK	-	135	150	☐
	42	3	64-QAM	16-QAM	QPSK	-	162	180	☐
	43	3	64-QAM	16-QAM	16-QAM	-	189	210	☐
	44	3	64-QAM	64-QAM	QPSK	-	189	210	☐
	45	3	64-QAM	64-QAM	16-QAM	-	216	240	☐
	46	3	16-QAM	QPSK	QPSK	-	162	180	☐
	47	3	16-QAM	16-QAM	QPSK	-	202.5	225	☐
	48	3	64-QAM	QPSK	QPSK	-	202.5	225	☐
	49	3	64-QAM	16-QAM	QPSK	-	243	270	☐
	50	3	64-QAM	16-QAM	16-QAM	-	283.5	315	☐
	51	3	64-QAM	64-QAM	QPSK	-	283.5	315	☐
	52	3	64-QAM	64-QAM	16-QAM	-	324	360	☐
☐	24	4	BPSK				54	60	☐
	25	4	QPSK				108	120	☐
	26	4	QPSK				162	180	☐
	27	4	16-QAM				216	240	☐
	28	4	16-QAM				324	360	☐
	29	4	64-QAM				432	480	☐
	30	4	64-QAM				486	540	☐
	31	4	64-QAM				540	600	☐
	53	4	16-QAM	QPSK	QPSK	QPSK	135	150	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	162	180	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	189	210	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	162	180	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	189	210	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	216	240	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	243	270	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	216	240	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	243	270	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	270	300	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	270	300	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	297	330	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	202.5	225	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	243	270	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	283.5	315	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	243	270	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	283.5	315	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	324	360	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	364.5	405	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	324	360	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	364.5	405	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	405	450	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	405	450	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	445.5	495	☐

2.2. RUNNING MODE

The EUT is set in the following modes during tests:

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent reception

Following commands with the specific test software "MToolV3.0.0.1" are used to set the product:

- See document "WIFI compliance test command of M384-US-4L-1 FCC 5GHz V03" for the command used during test

2.3. EQUIPMENT LABELLING



Power supply n°1



Power supply n°2



Power supply n°3

2.4. EQUIPMENT MODIFICATION

- ☒ None
 ☐ Modification:

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER
Date of test : January 4, 2017
Ambient temperature : 22 °C
Relative humidity : 41 %

3.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☐ RSS-Gen Issue 4 § 6.6
- ☒ ANSI C63.10 § 6.9.2

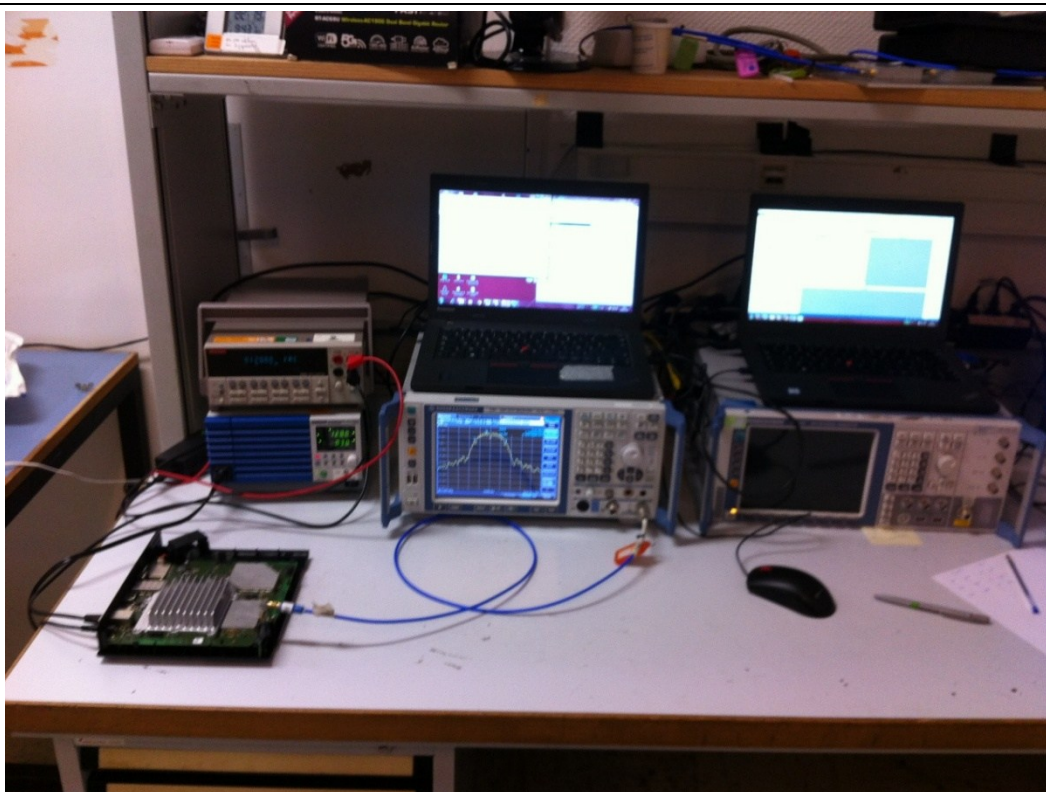

Photograph for Occupied bandwidth



3.1. LIMIT


None


3.2. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Multi-meter	KEITHLEY	2000	A1242090	2016/05	2018/05
Programmable AC/DC power supply	-; KIKUSUI	PCR500M	A7040079	Verified with calibrated multimeter	Verified with calibrated multimeter
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2016/03	2017/03
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329675	2016/10	2017/10


Note: In our quality system, the test equipment calibration due is more & less 2 months

3.3. RESULTS

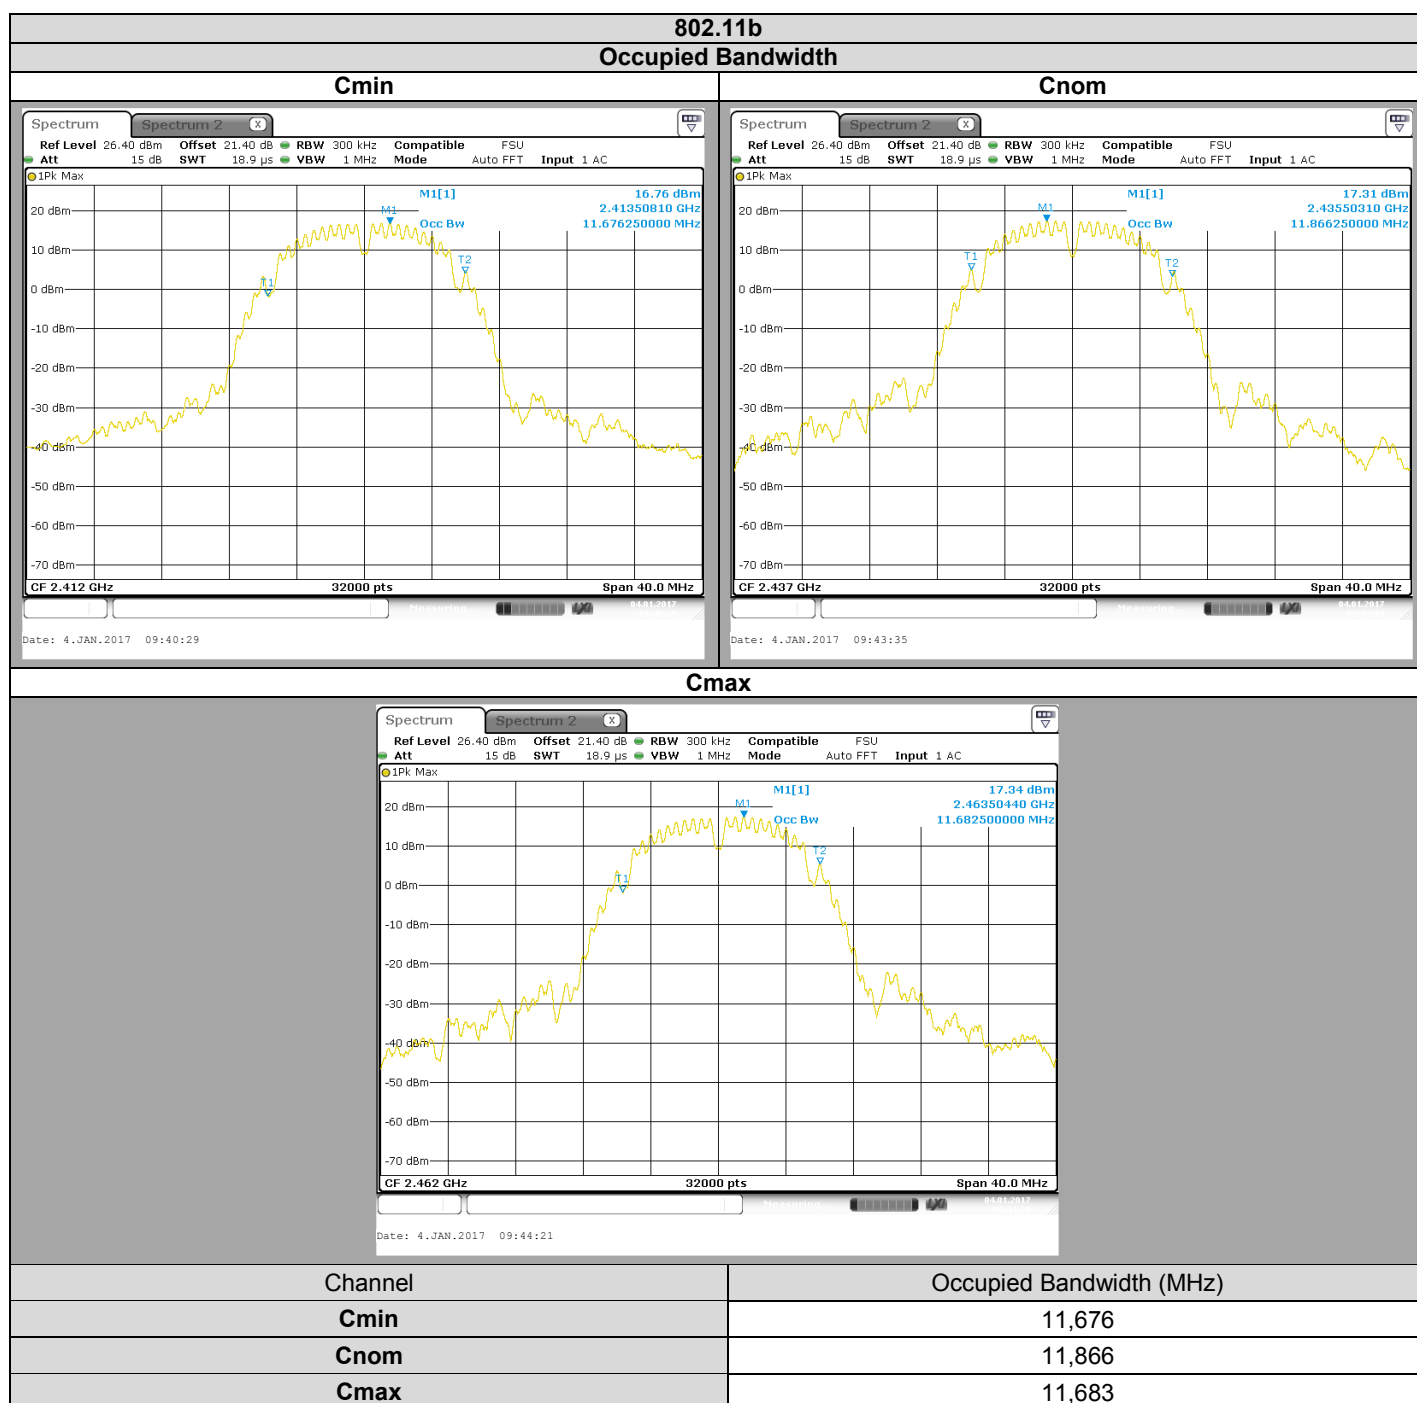

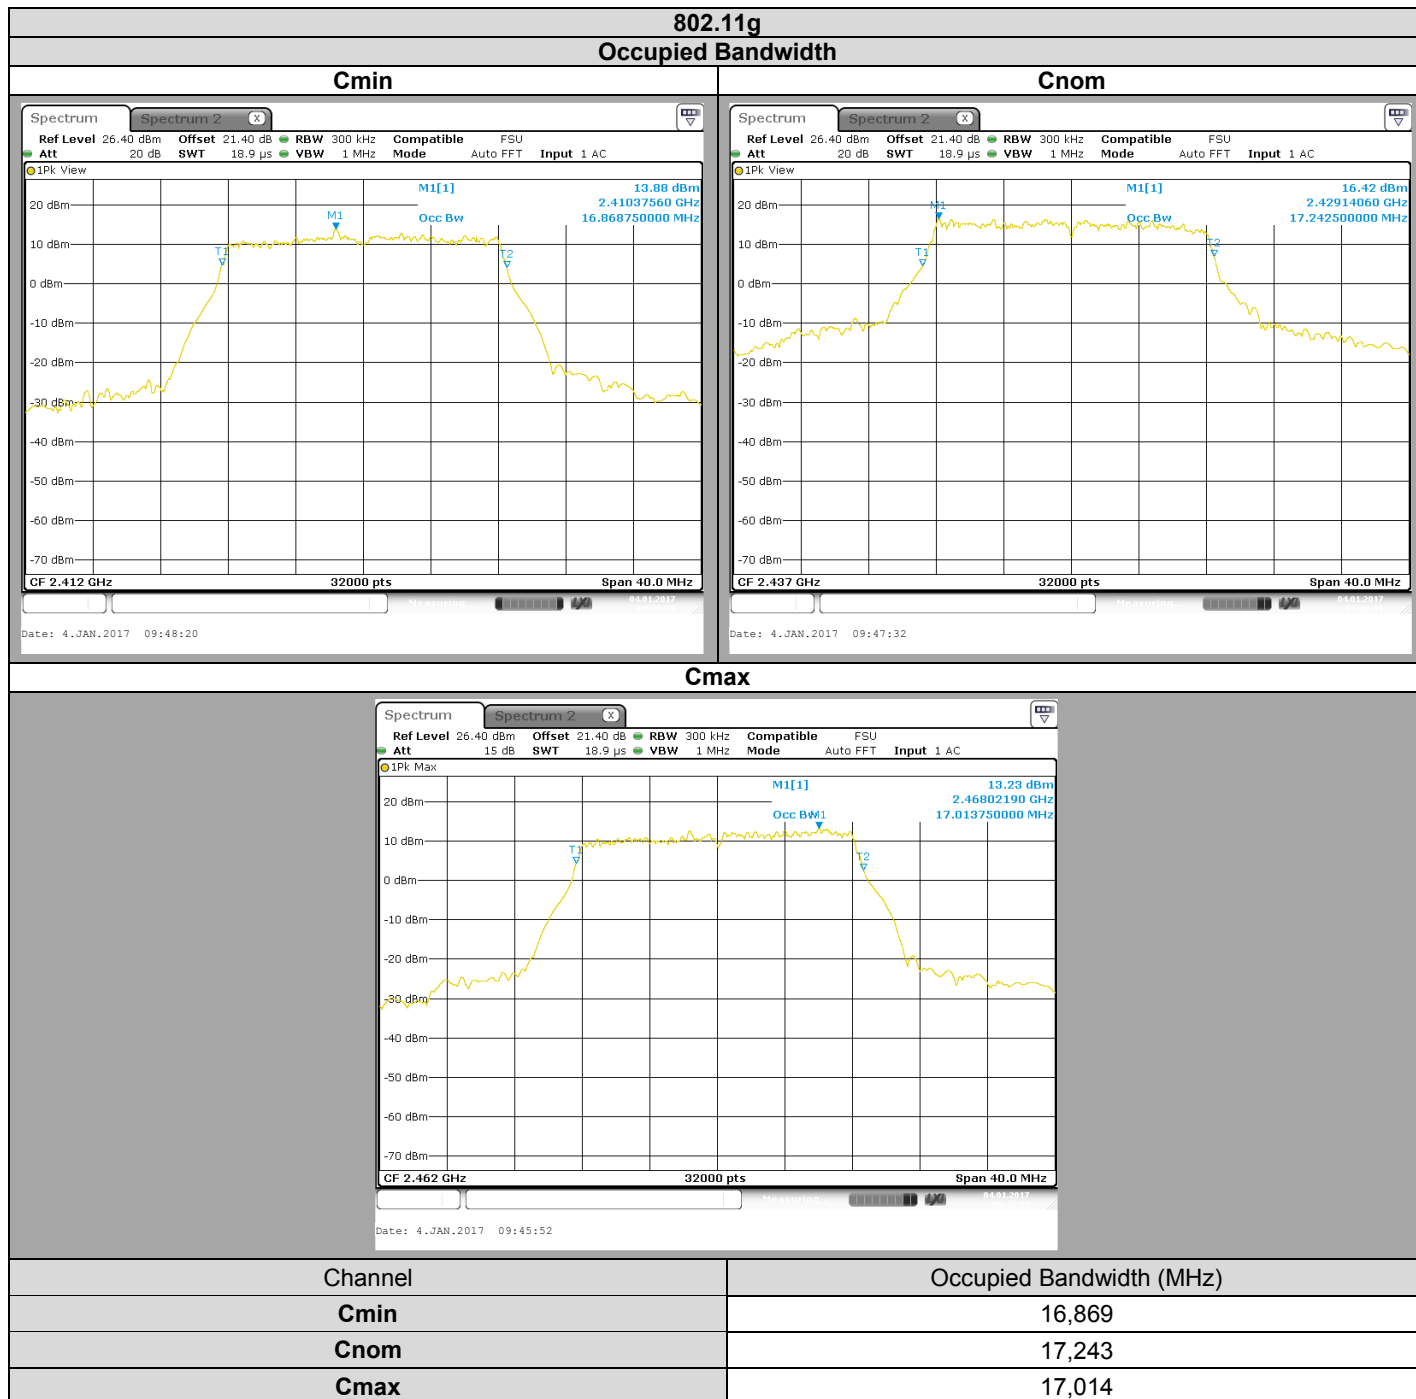

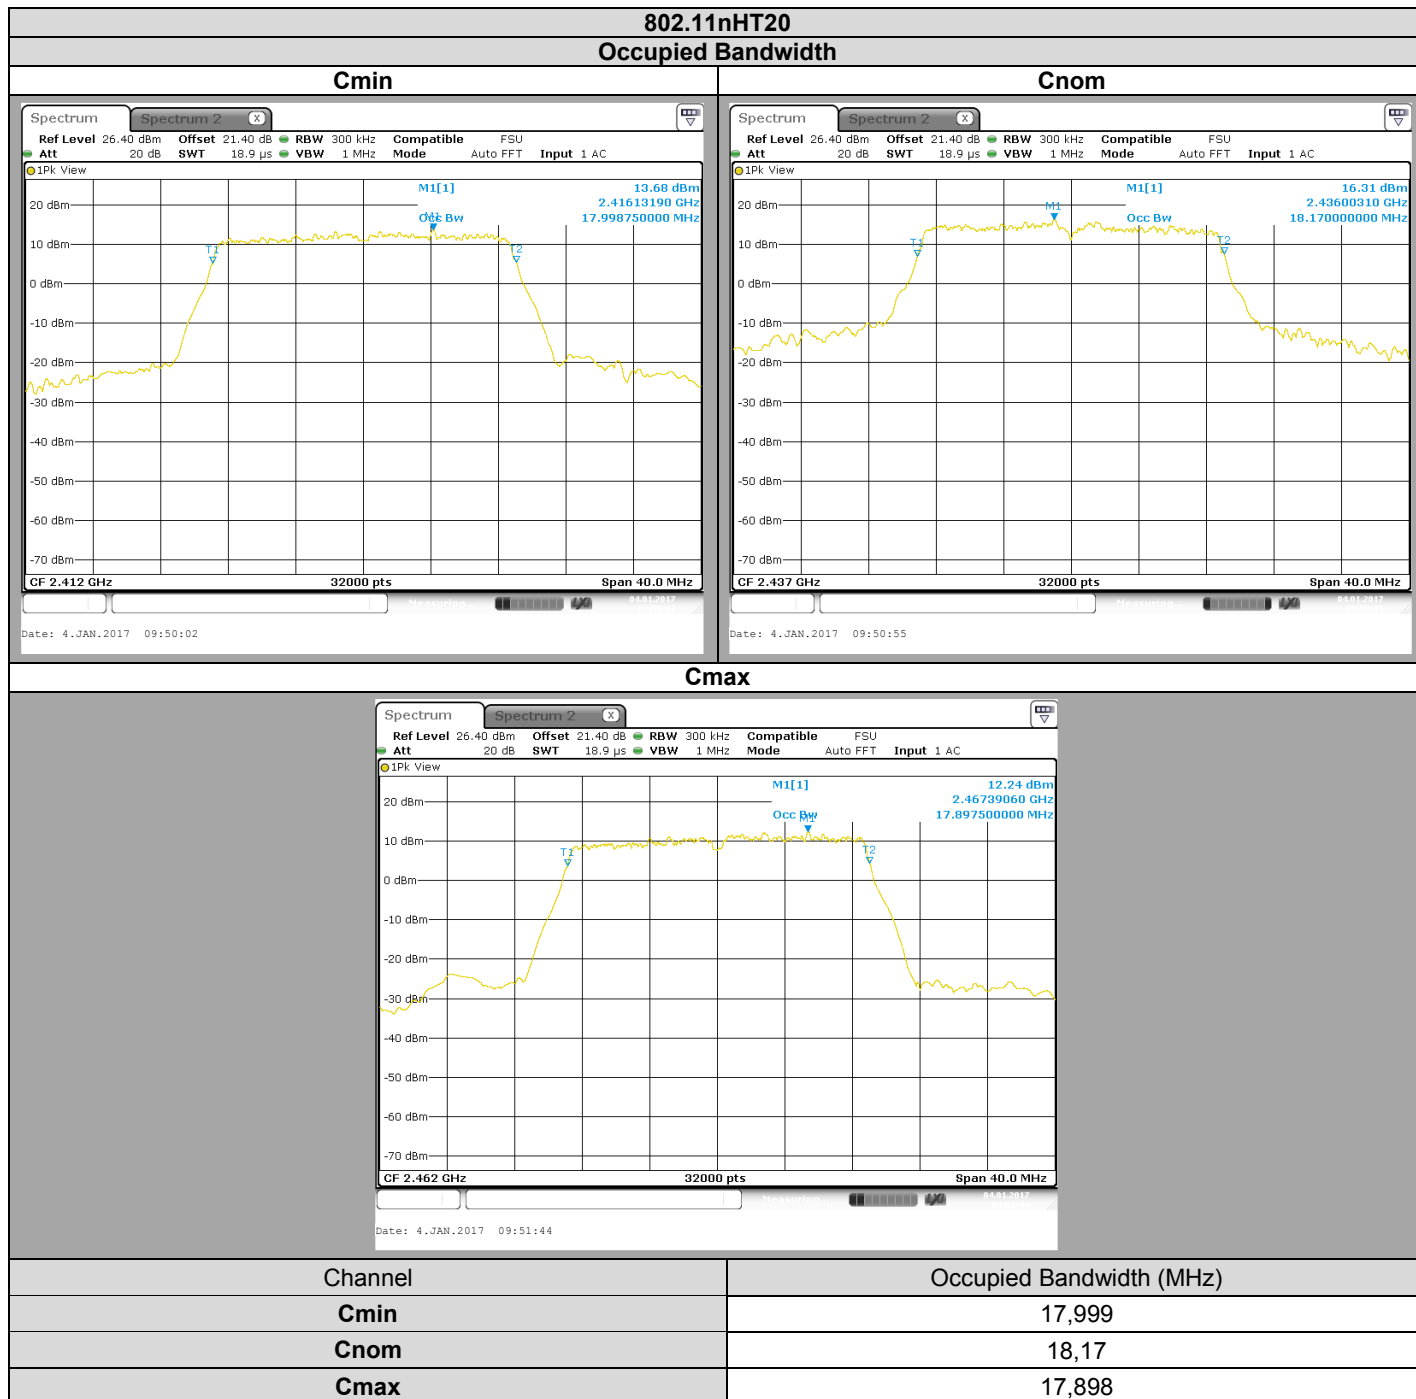

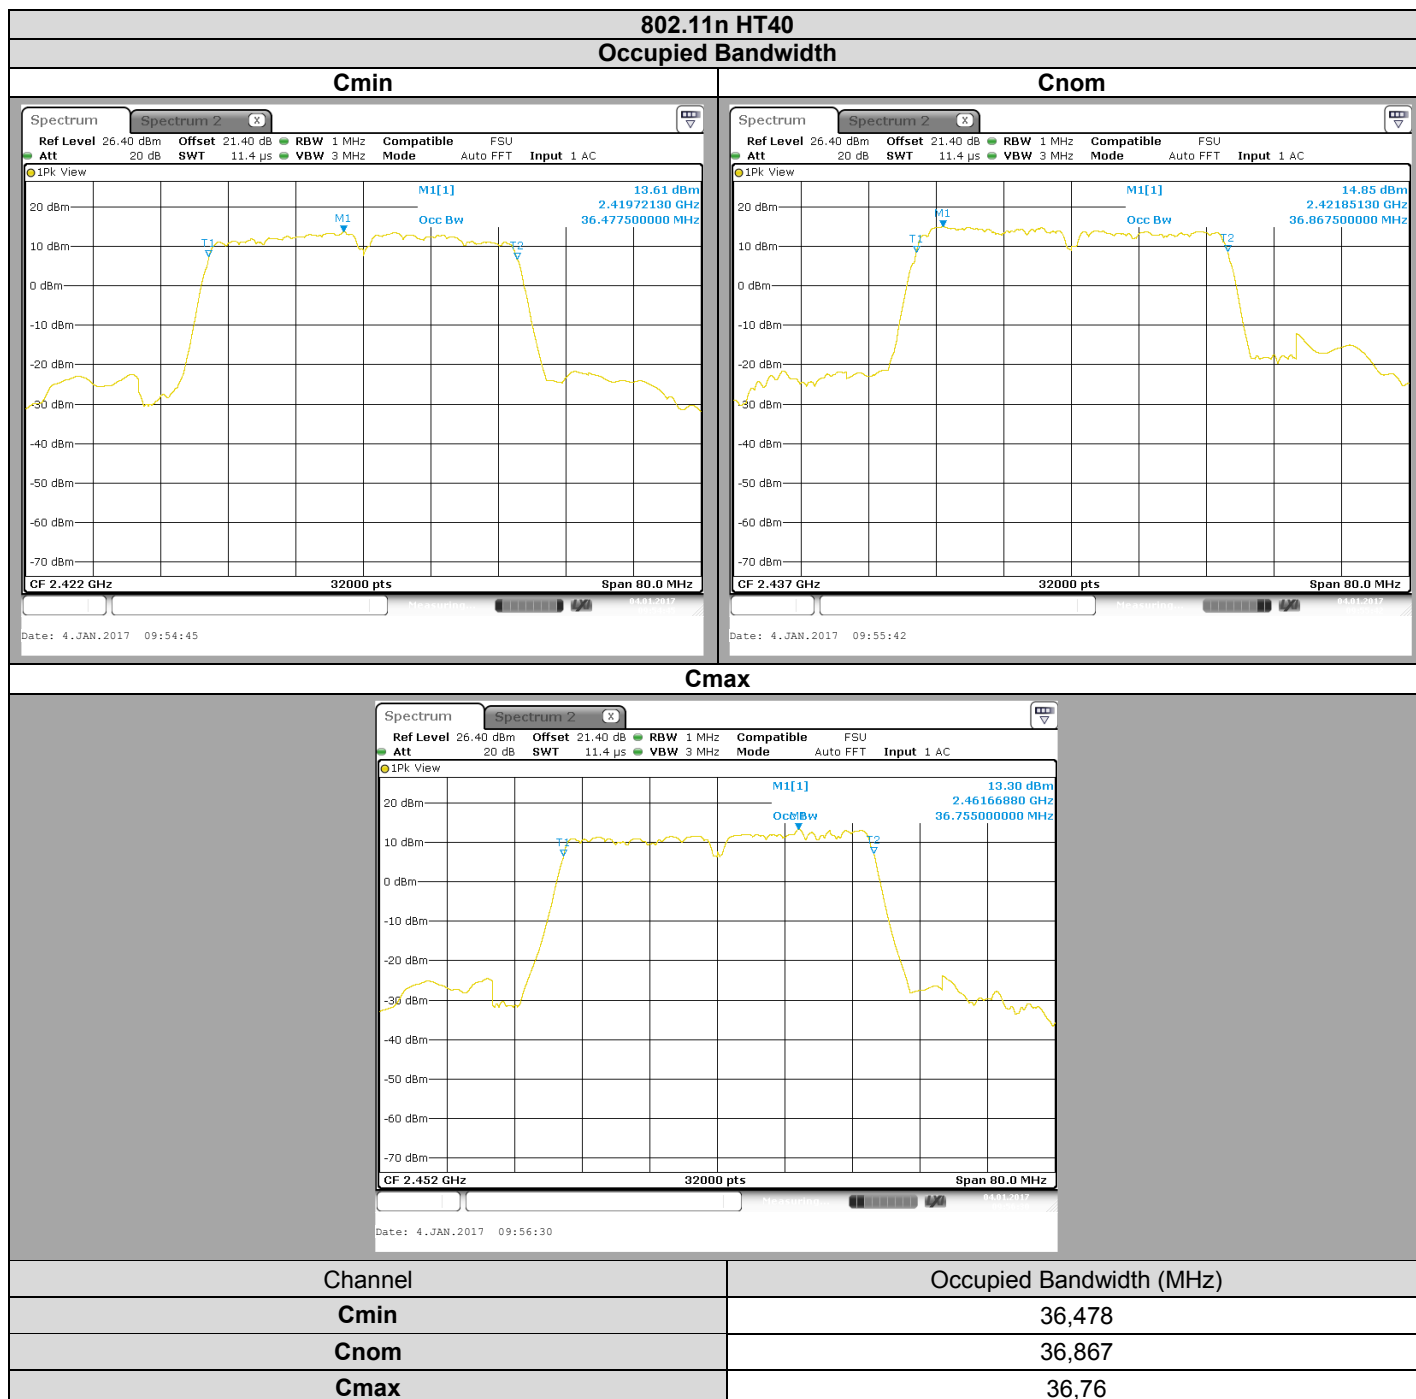

3.1. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **SAGEMCOM** MiniBox (253697290), SN: **616476080862**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.

4. 6dB EMISSION BANDWIDTH

4.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER
Date of test : January 4, 2017
Ambient temperature : 22 °C
Relative humidity : 41 %

4.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ KDB 558074 D01 DTS Meas Guidance v03r05 § 8.1
- ☐ KDB 558074 D01 DTS Meas Guidance v03r05 § 8.2

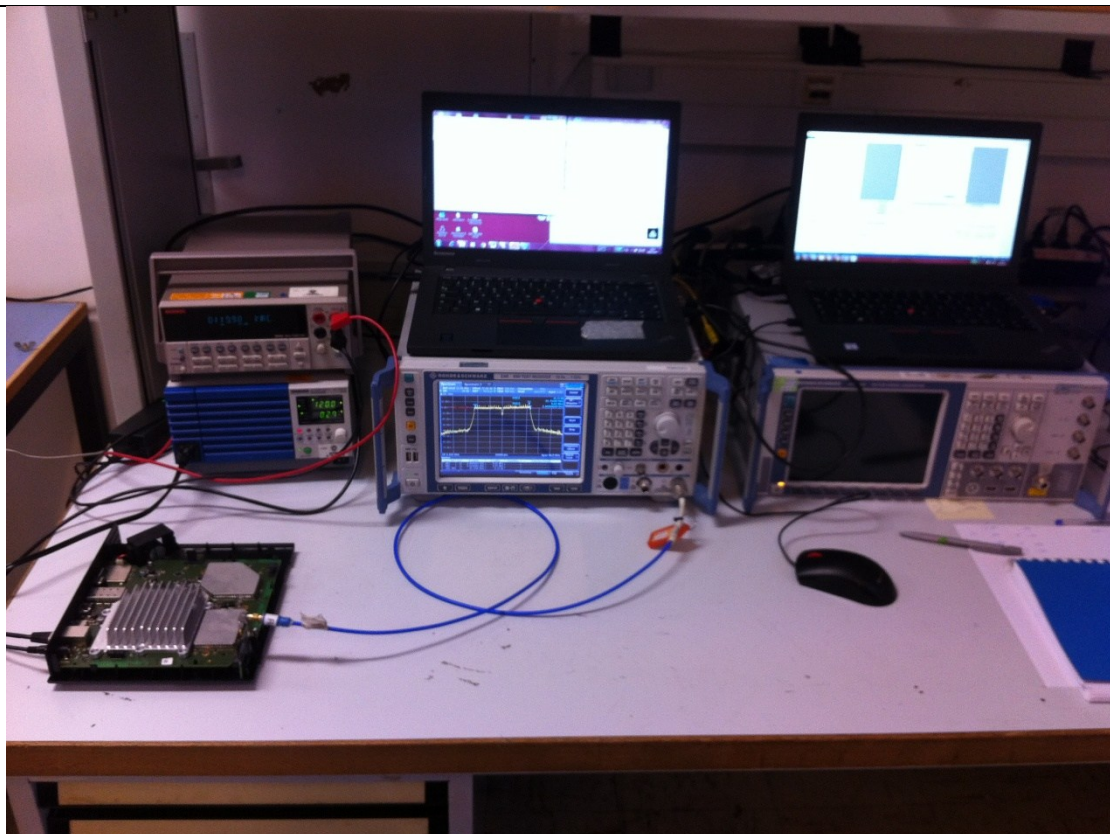

Photograph for 6dB emission bandwidth



4.3. LIMIT


The 6dB bandwidth shall be at least 500kHz


4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Multi-meter	KEITHLEY	2000	A1242090	2016/05	2018/05
Programmable AC/DC power supply	-; KIKUSUI	PCR500M	A7040079	Verified with calibrated multimeter	Verified with calibrated multimeter
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2016/03	2017/03
RF cable & 20 dB attenuator	Télédyn	920-0202-048	A5329675	2016/10	2017/10

Note: In our quality system, the test equipment calibration due is more & less 2 months


4.5. RESULTS

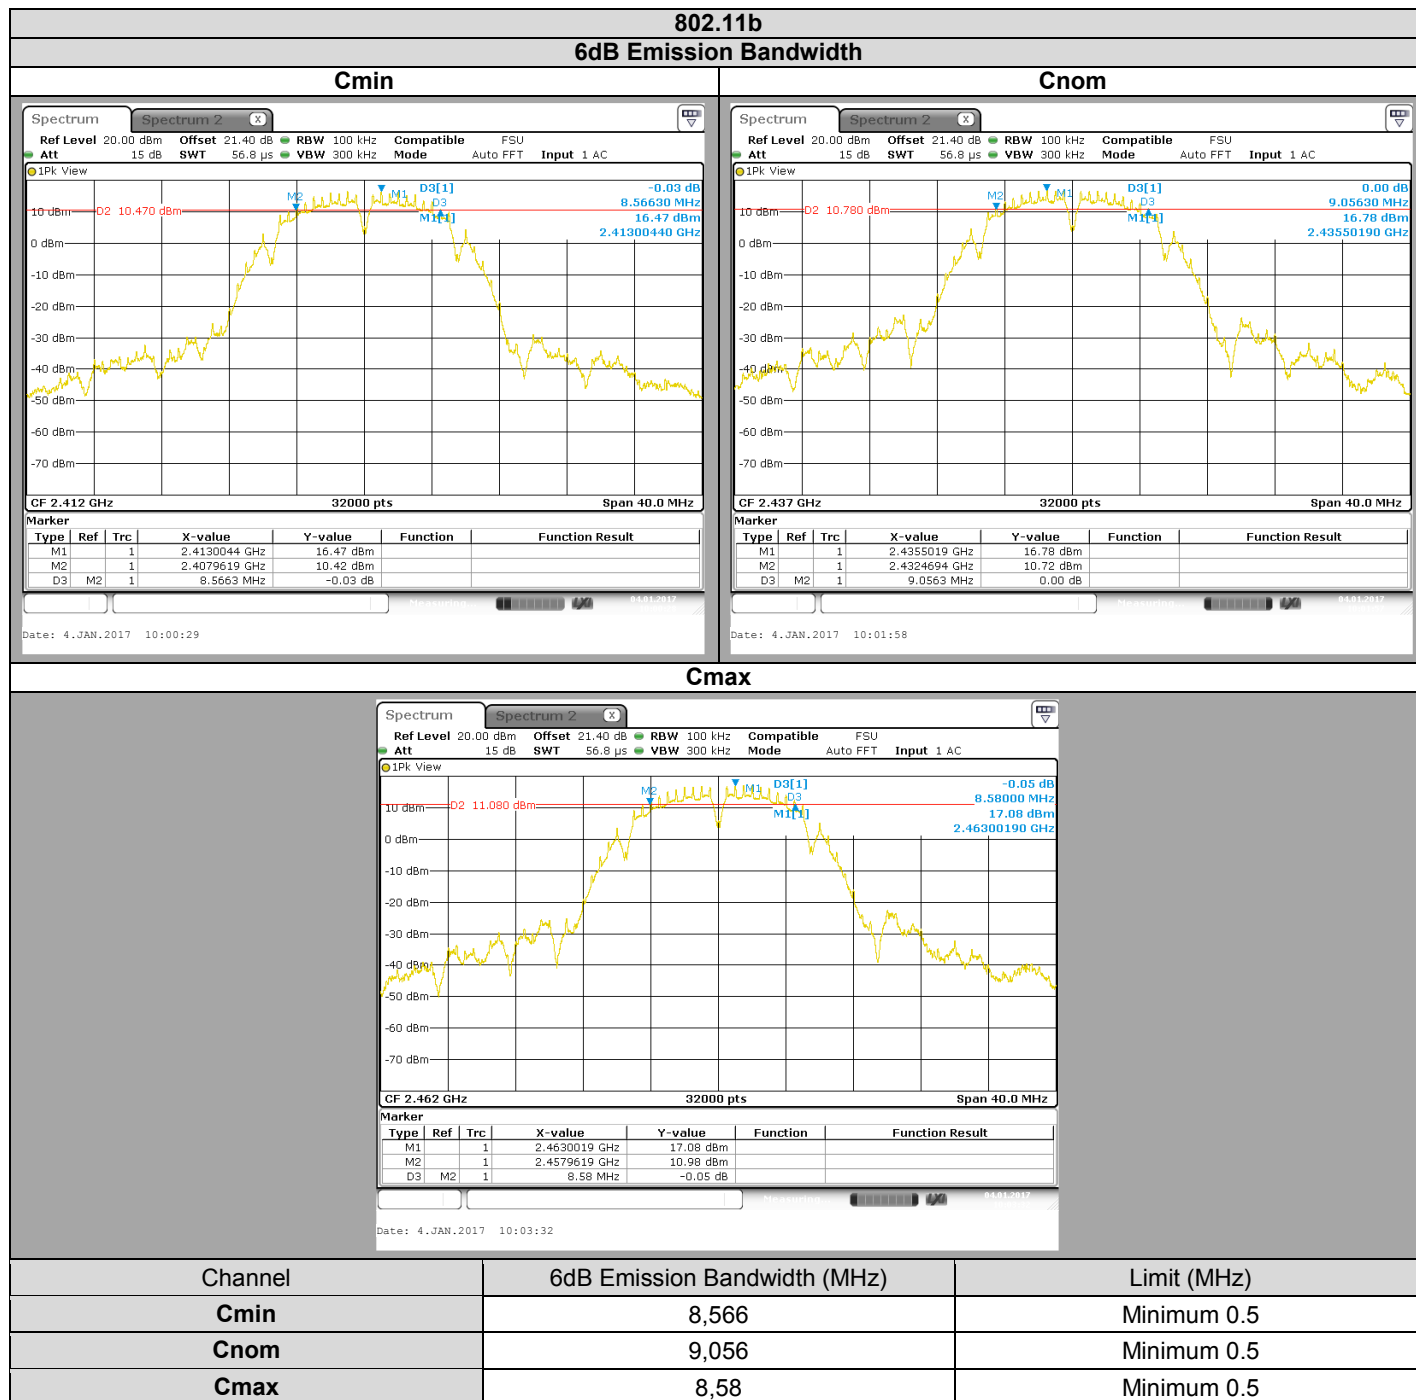

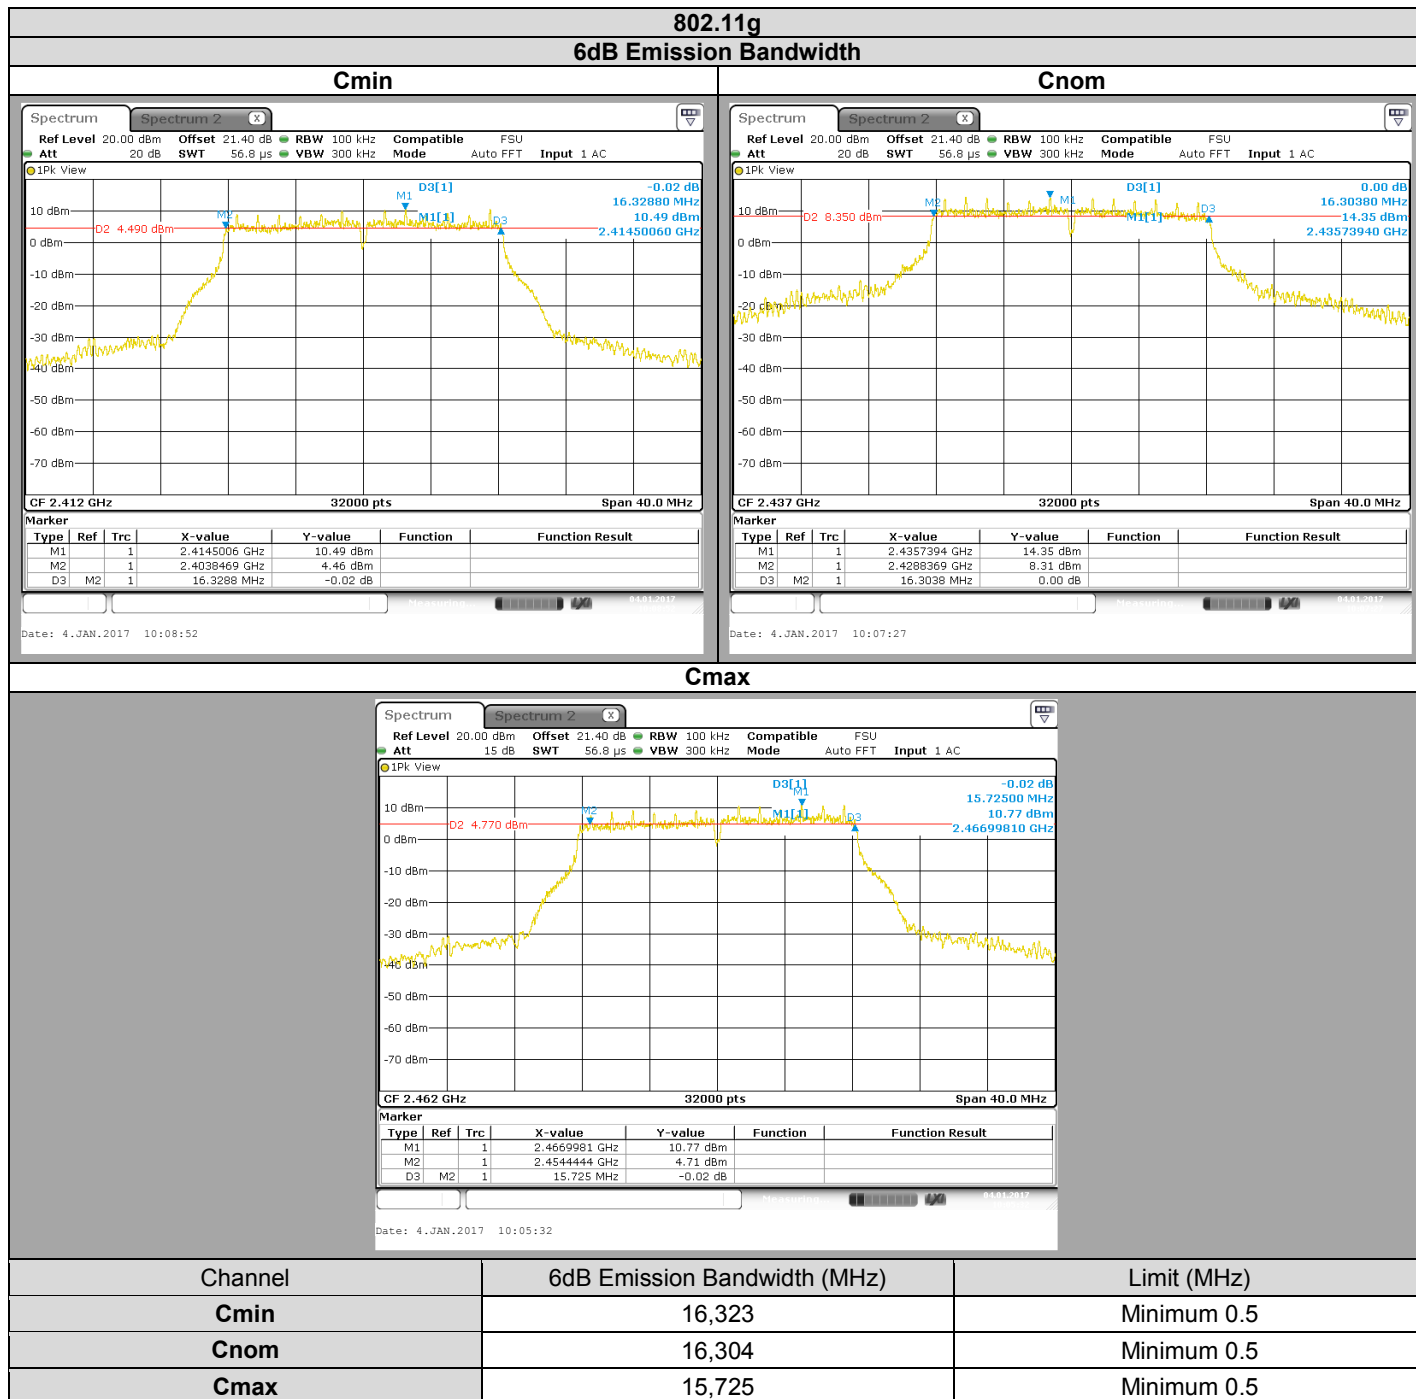


802.11n HT20
6dB Emission Bandwidth


Cmin

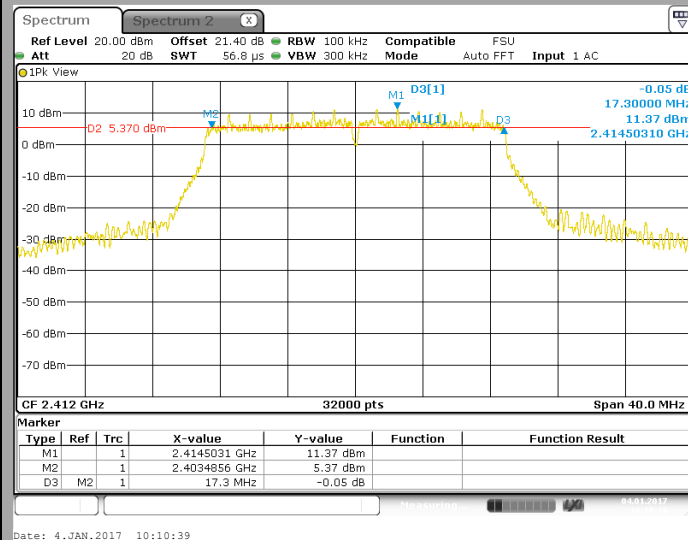


Cnom

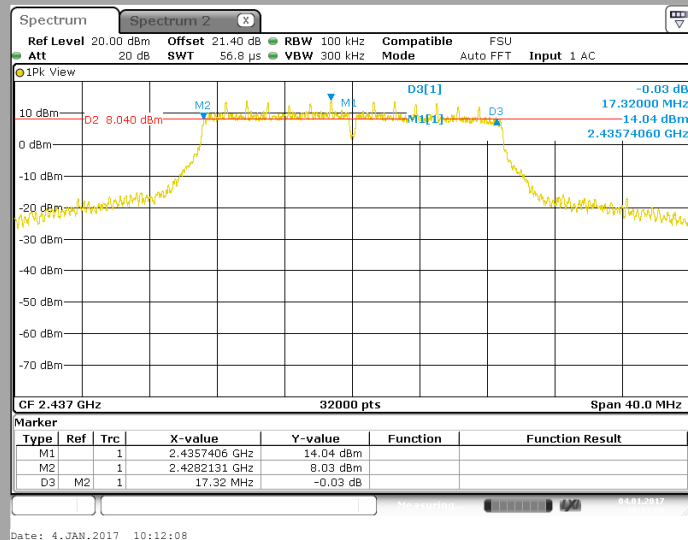

Cmax

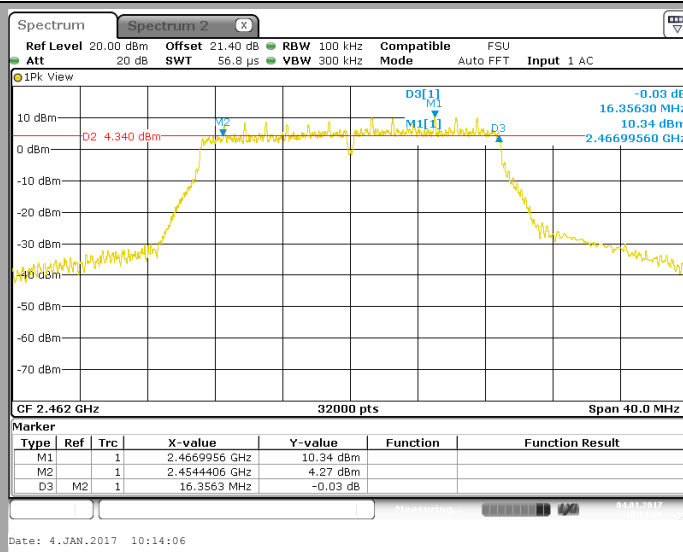

Channel	6dB Emission Bandwidth (MHz)	Limit (MHz)
Cmin	17,3	Minimum 0.5
Cnom	17,32	Minimum 0.5
Cmax	16,356	Minimum 0.5

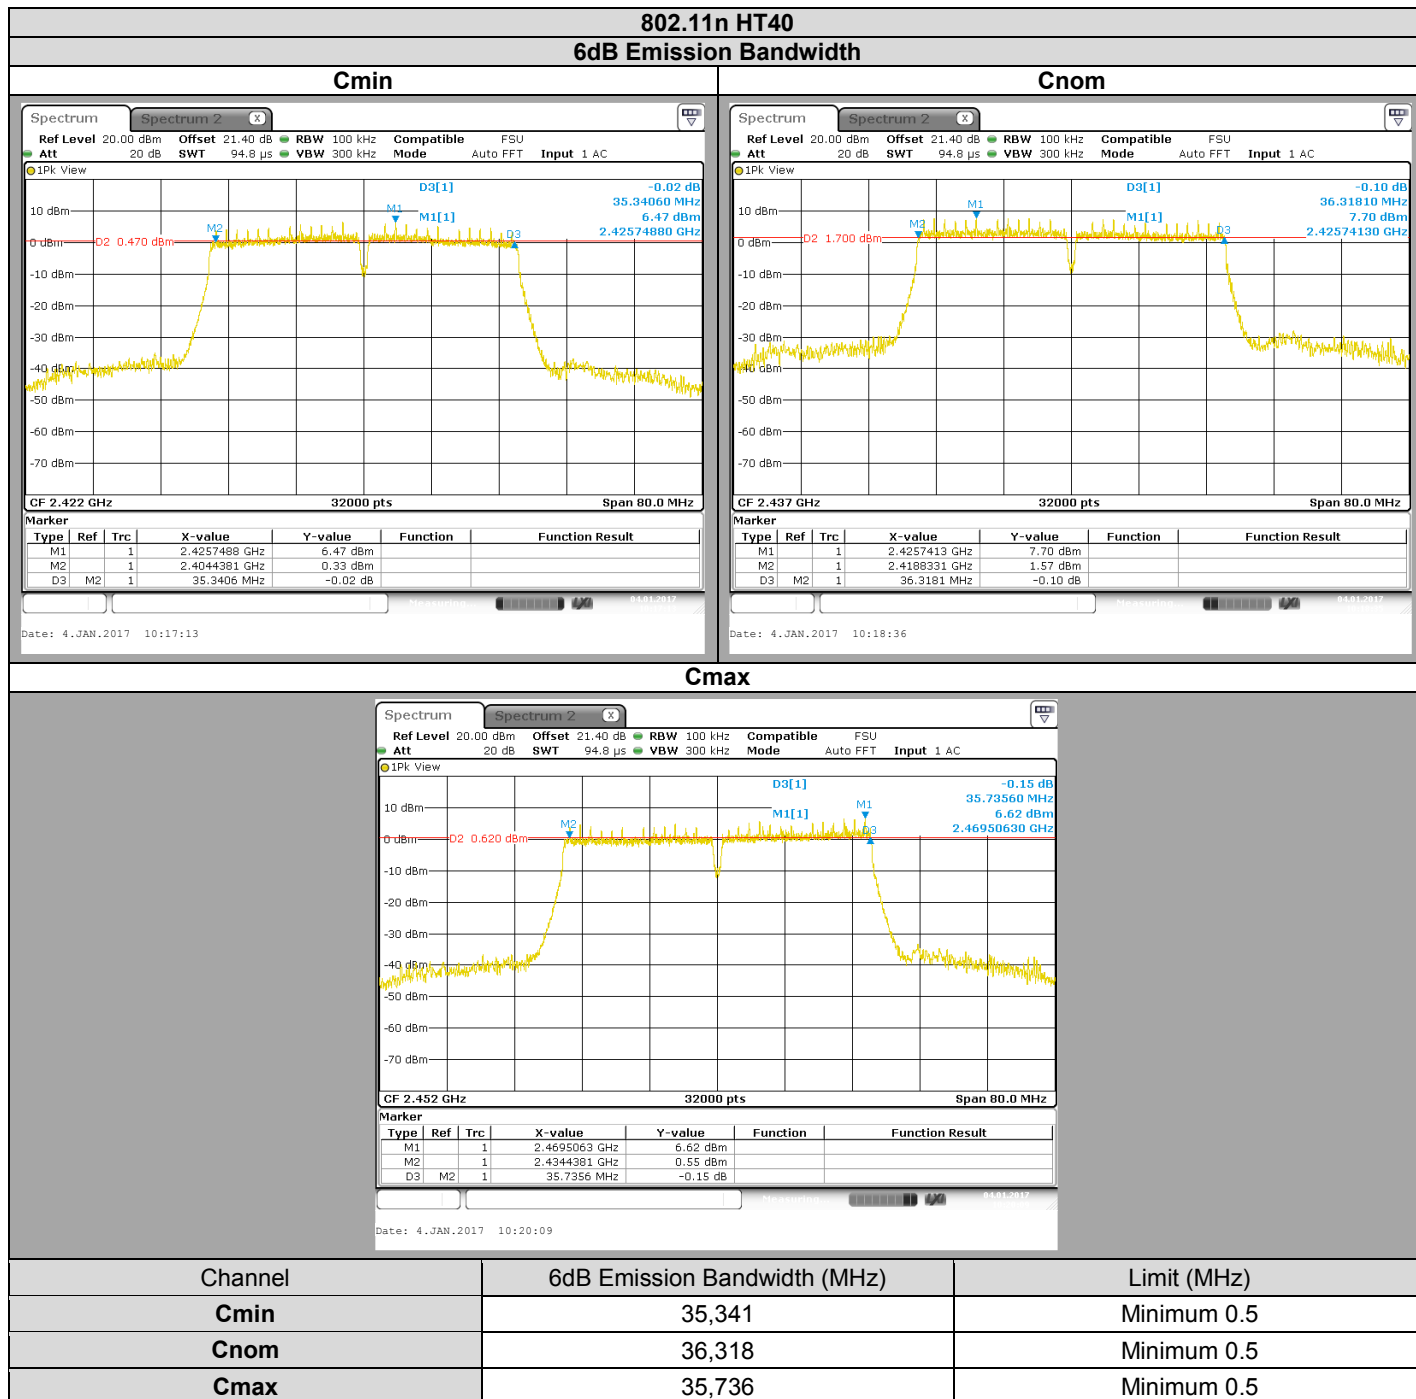

4.6. CONCLUSION

6dB Emission Bandwidth measurement performed on the sample of the product **SAGEMCOM** MiniBox (253697290), SN: **616476080862**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.

5. DUTY CYCLE

5.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER
Date of test : January 4, 2017
Ambient temperature : 22 °C
Relative humidity : 41 %

5.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ KDB 558074 D01 DTS Meas Guidance v03r05 § 6.0 b)

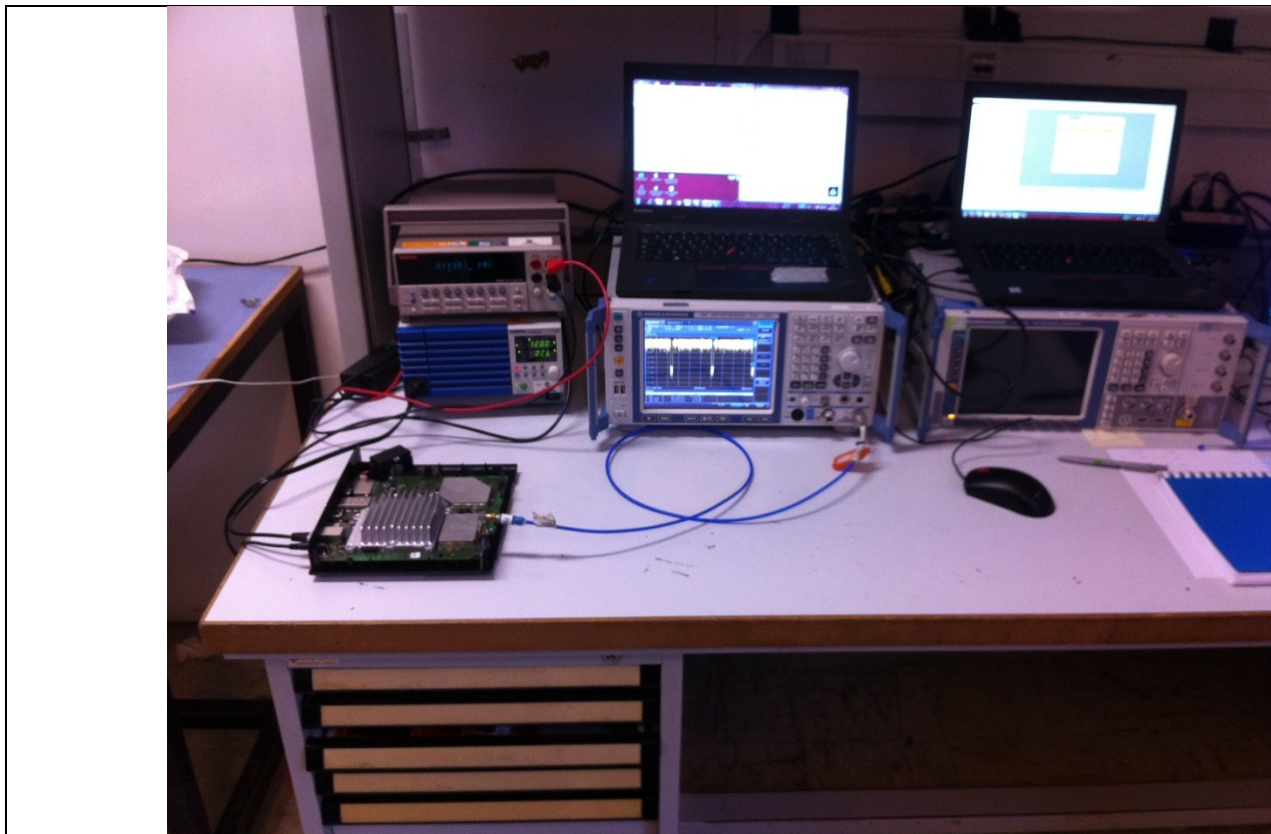

Photograph for Duty Cycle

5.3. LIMIT


None


5.4. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Multi-meter	KEITHLEY	2000	A1242090	2016/05	2018/05
Programmable AC/DC power supply	-; KIKUSUI	PCR500M	A7040079	Verified with calibrated multimeter	Verified with calibrated multimeter
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2016/03	2017/03
RF cable & 20 dB attenuator	Télédyn	920-0202-048	A5329675	2016/10	2017/10


Note: In our quality system, the test equipment calibration due is more & less 2 months

5.5. RESULTS

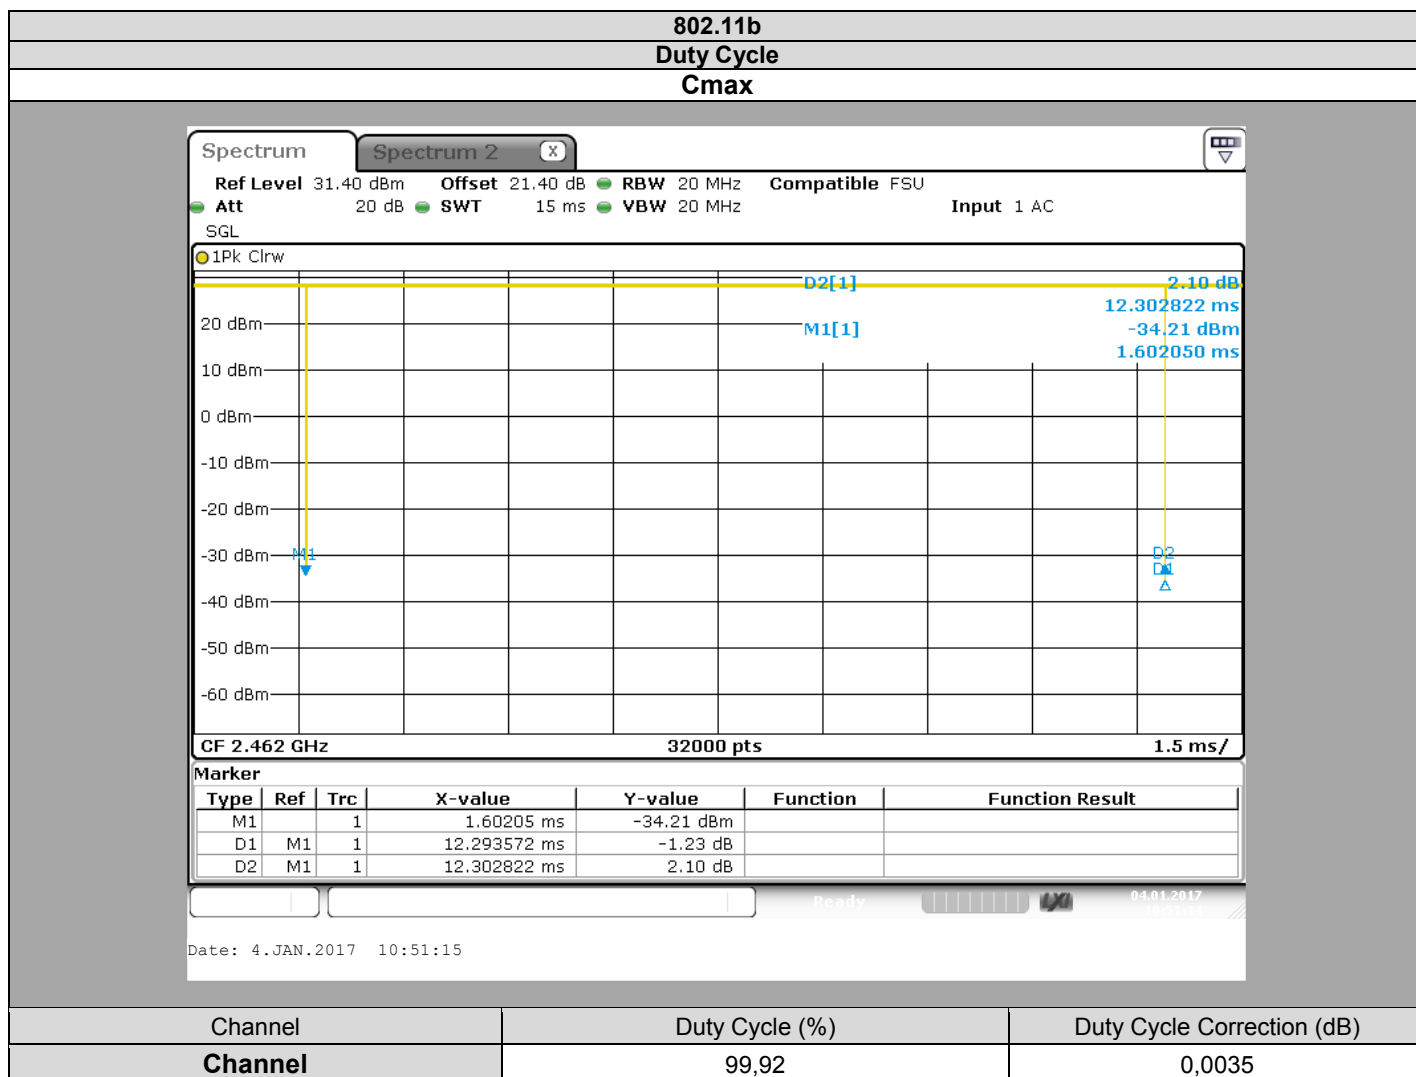

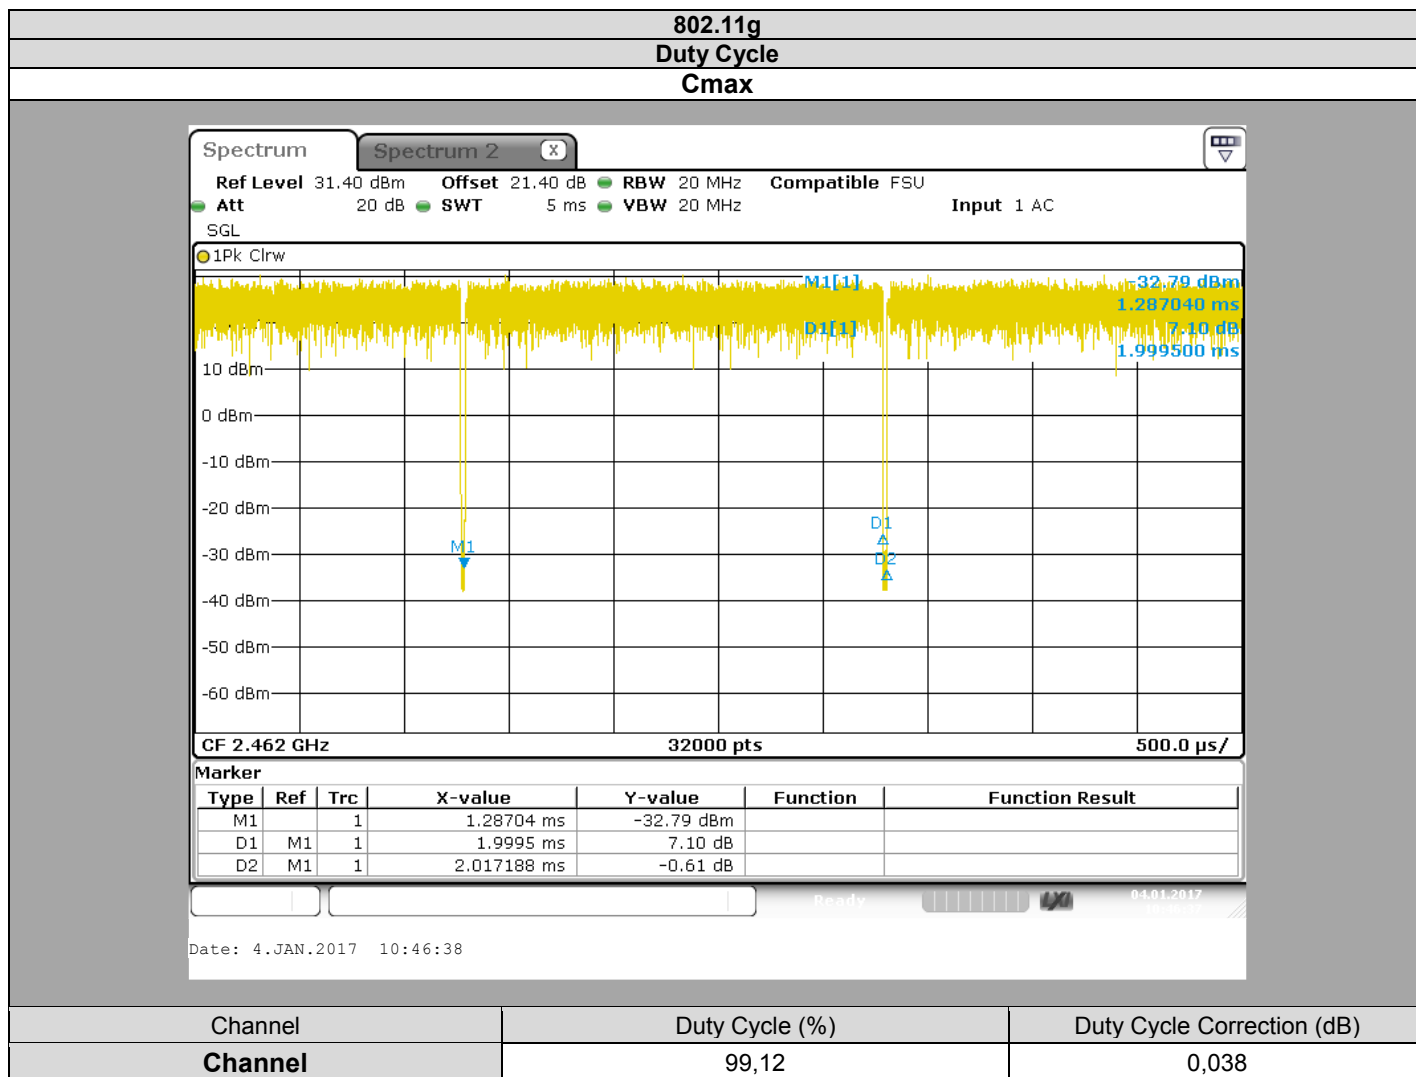

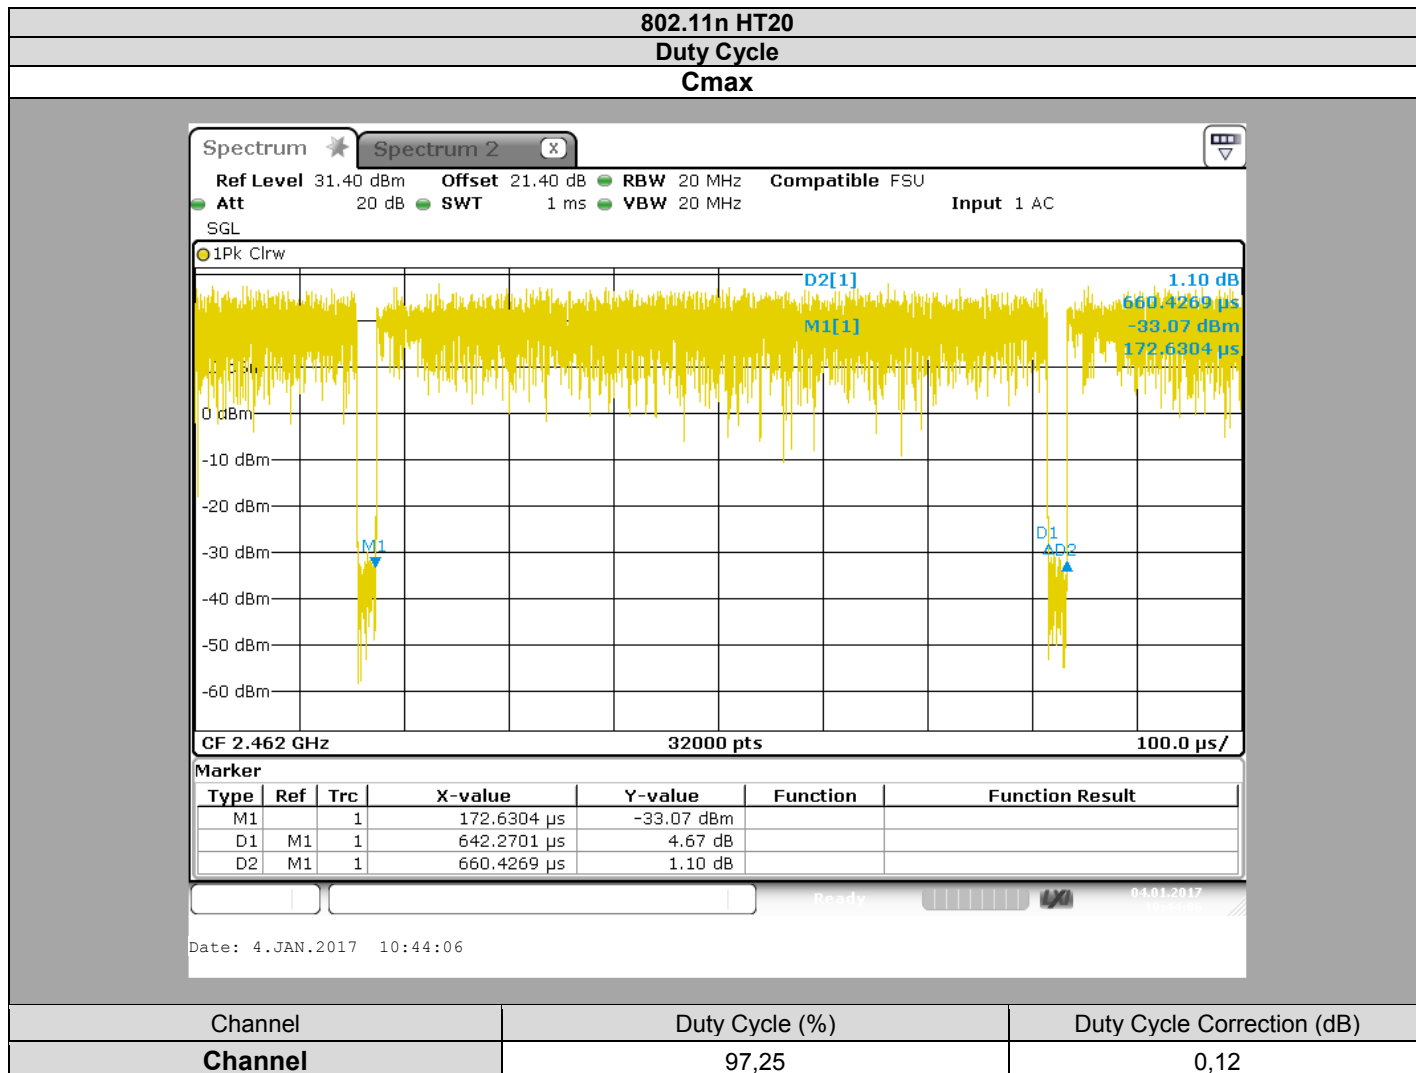

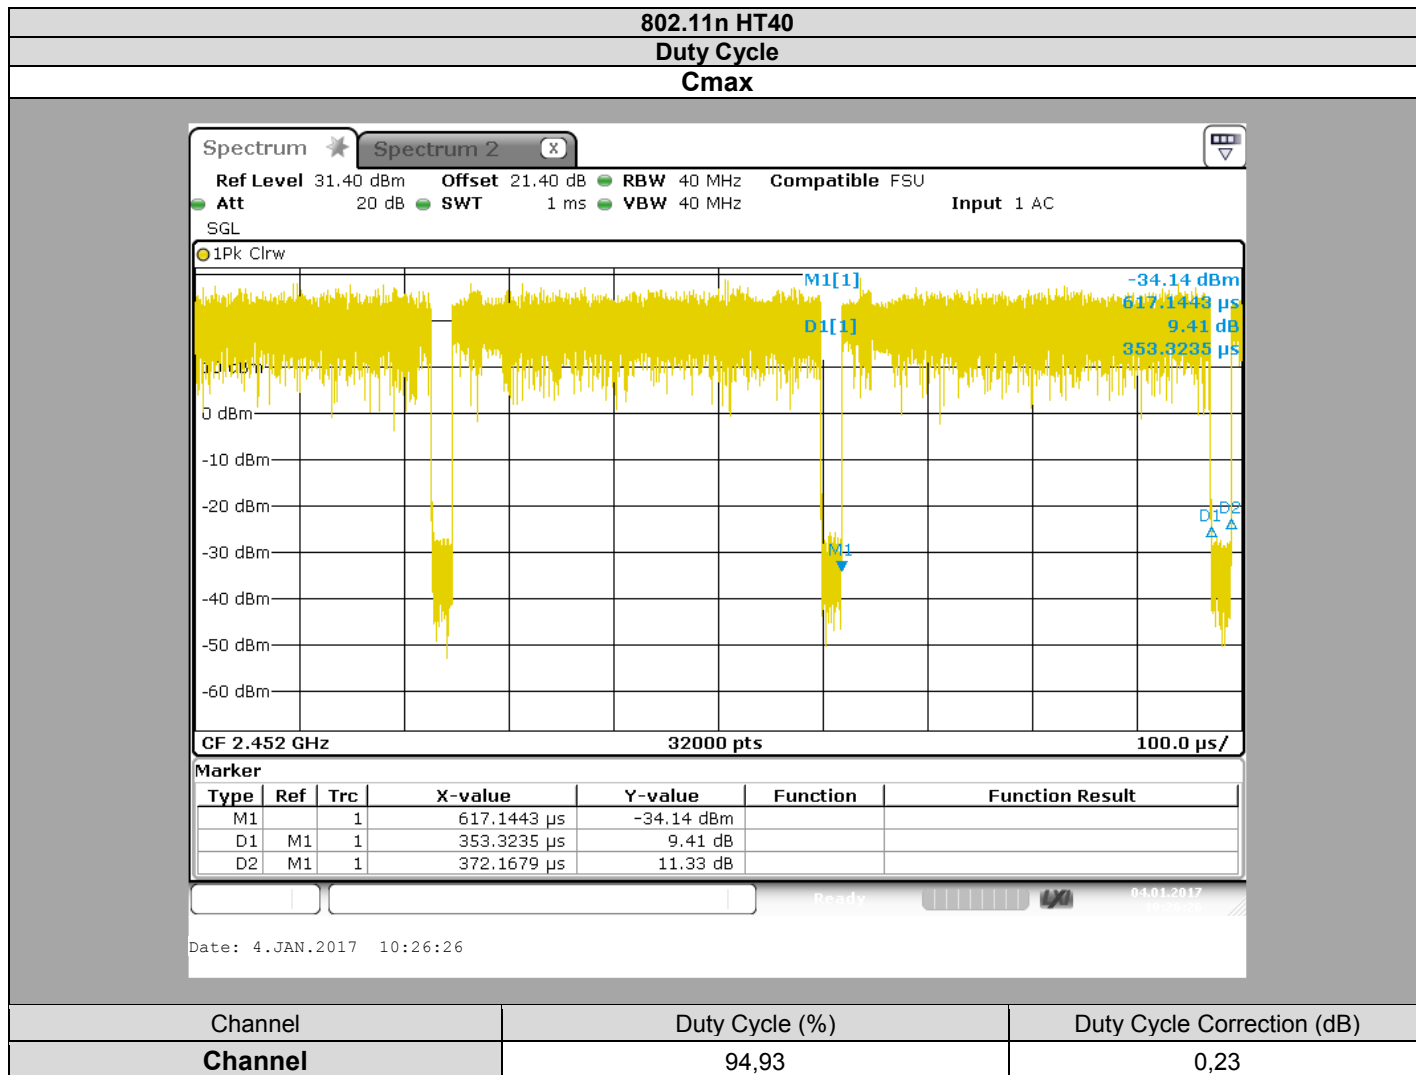

5.6. CONCLUSION

Duty Cycle measurement performed on the sample of the product **SAGEMCOM** MiniBox (253697290), SN: **616476080862**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER
Date of test : January 4, 2017 to January 9, 2017
Ambient temperature : 22 °C
Relative humidity : 41 %

6.2. TEST SETUP

- The Equipment Under Test is installed:

- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ KDB 558074 D01 DTS Meas Guidance v03r05 § 9.2.2.2 (Method AVGSA-1)
- ☐ KDB 558074 D01 DTS Meas Guidance v03r05 § 9.2.2.4 (Method AVGSA-2)
- ☒ KDB 662911 D01 Multiple Transmitter Output v02r01



Photograph for Maximum Conducted Output Power



6.3. LIMIT


Maximum Conducted Output power:
2400MHz-2483.5MHz: Shall not exceed 30dBm
Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi


6.4. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Multi-meter	KEITHLEY	2000	A1242090	2016/05	2018/05
Programmable AC/DC power supply	-; KIKUSUI	PCR500M	A7040079	Verified with calibrated multimeter	Verified with calibrated multimeter
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2016/03	2017/03
RF cable & 20 dB attenuator	Télédyn	920-0202-048	A5329675	2016/10	2017/10


Note: In our quality system, the test equipment calibration due is more & less 2 months


6.1. RESULTS

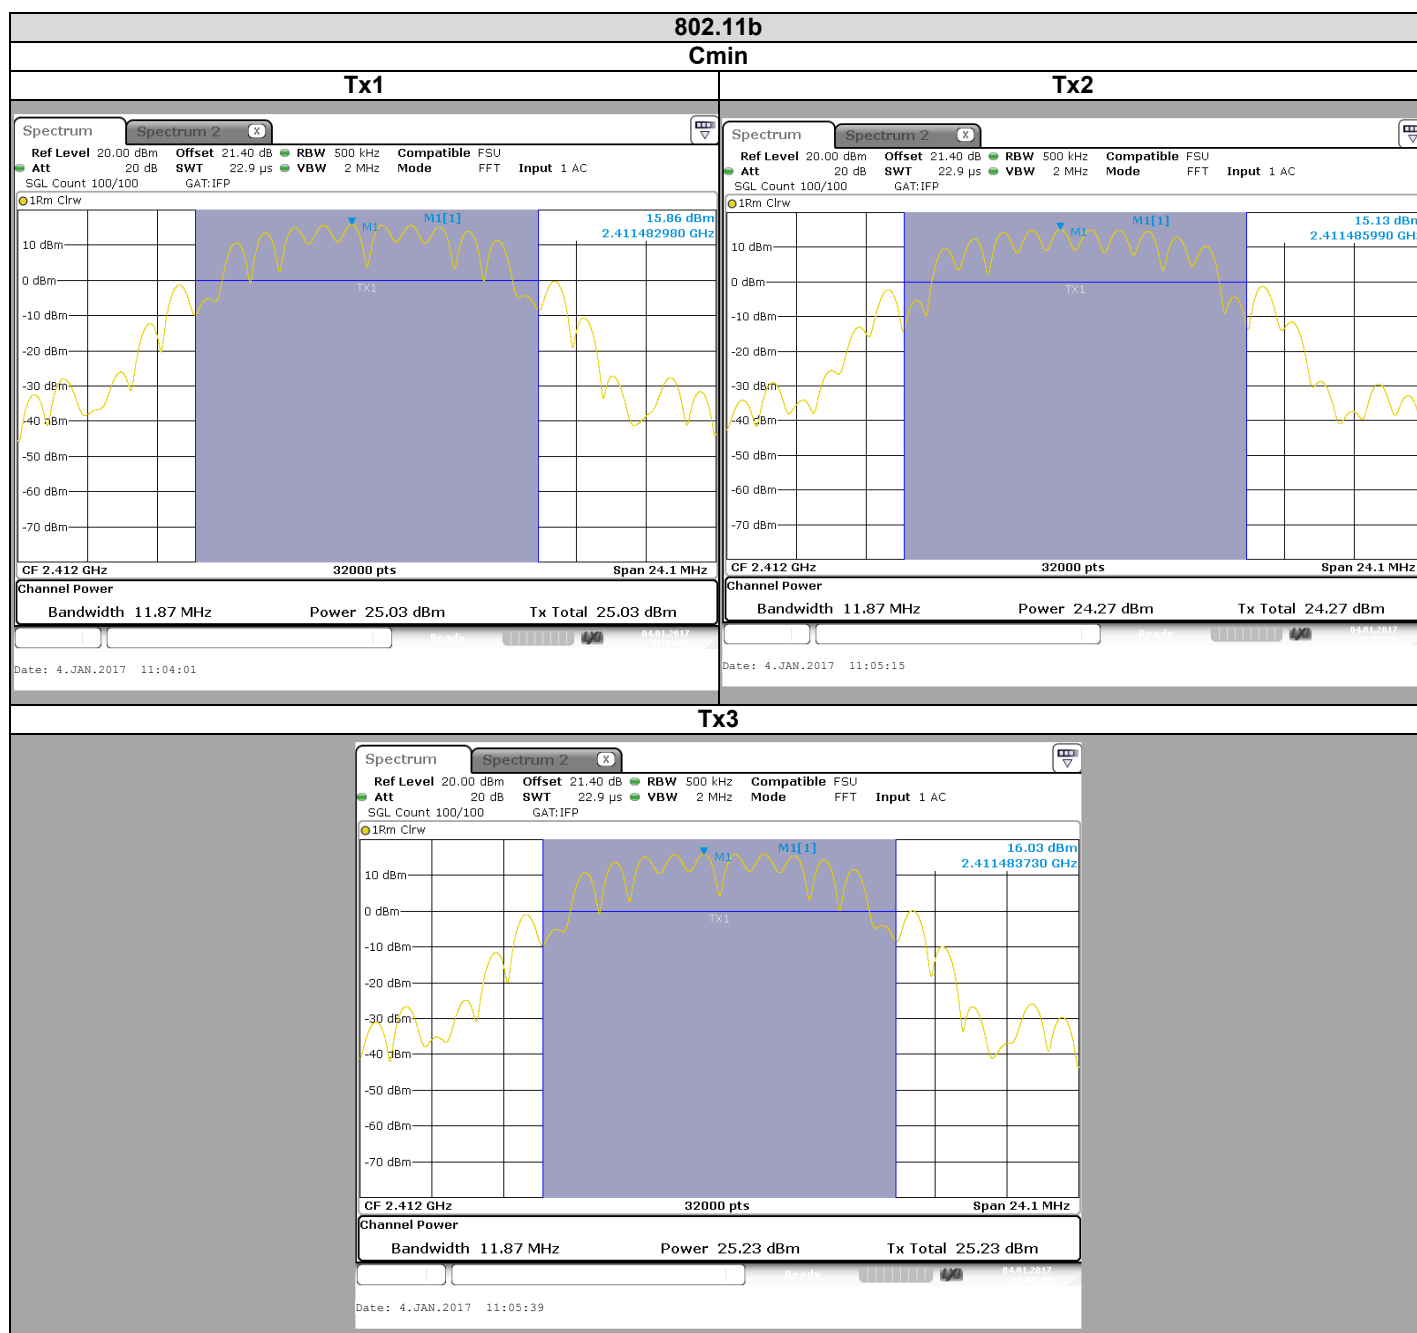


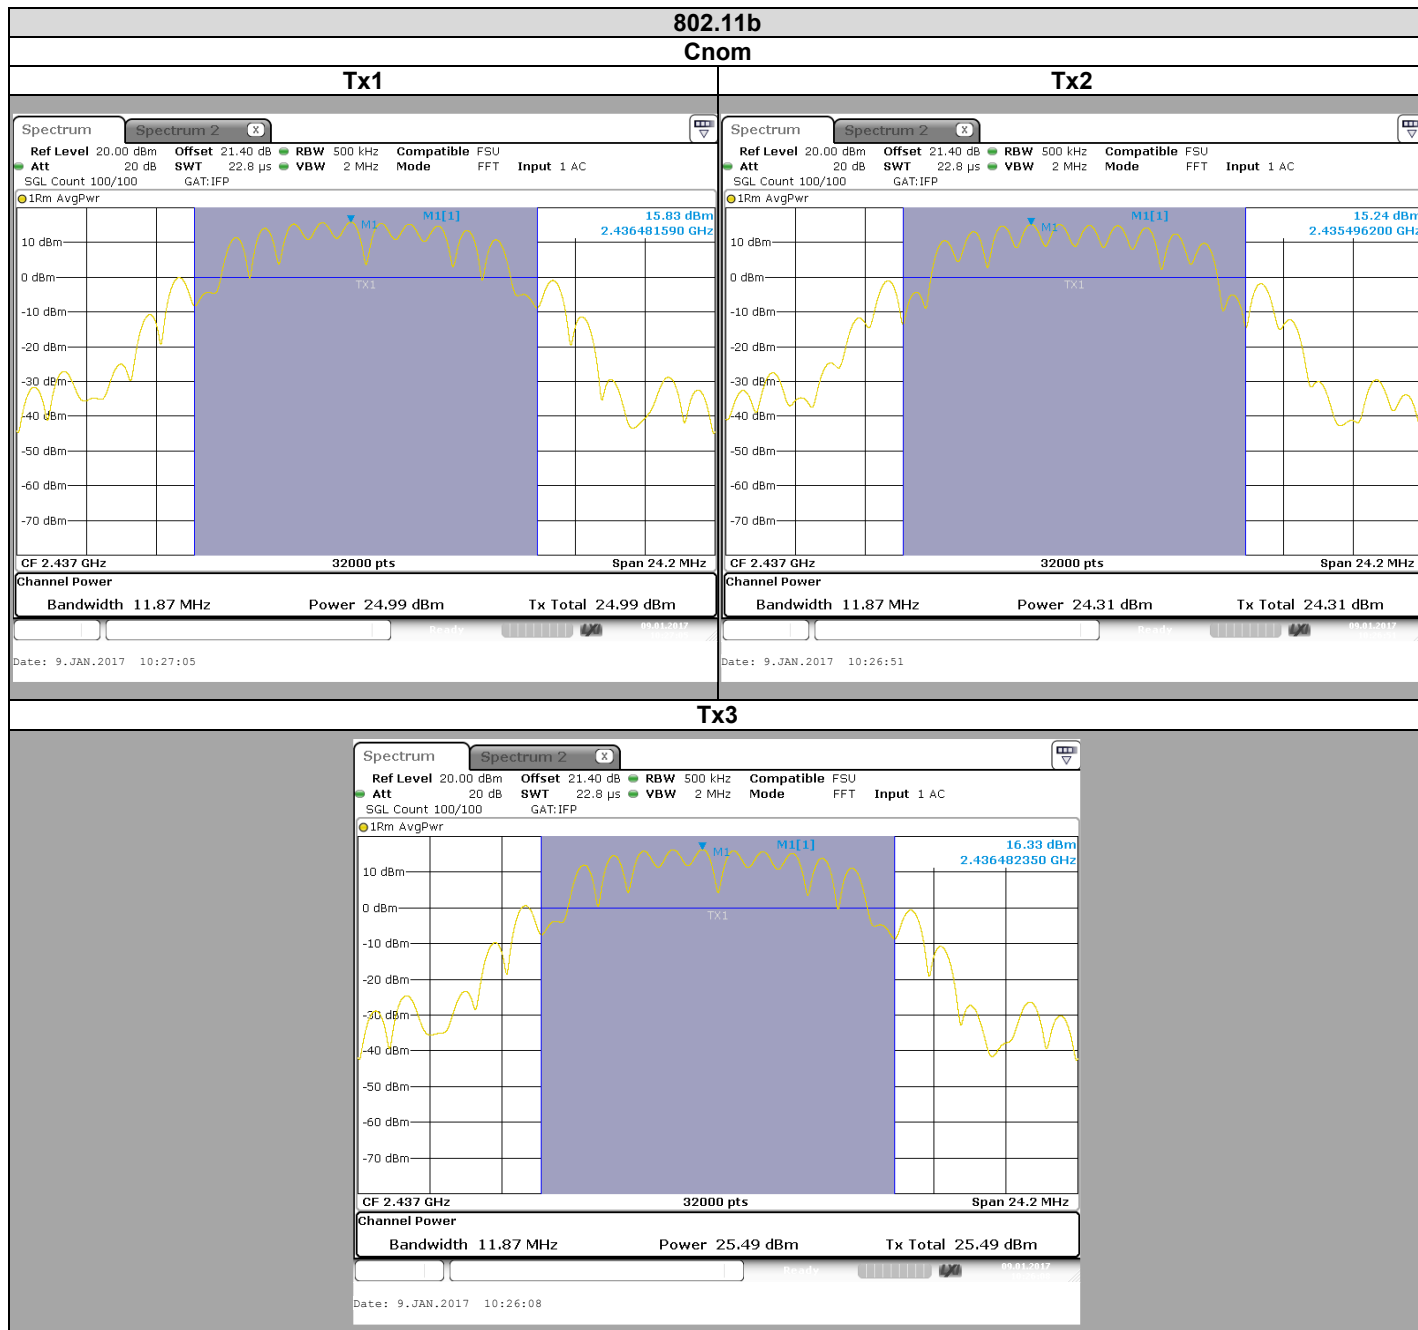


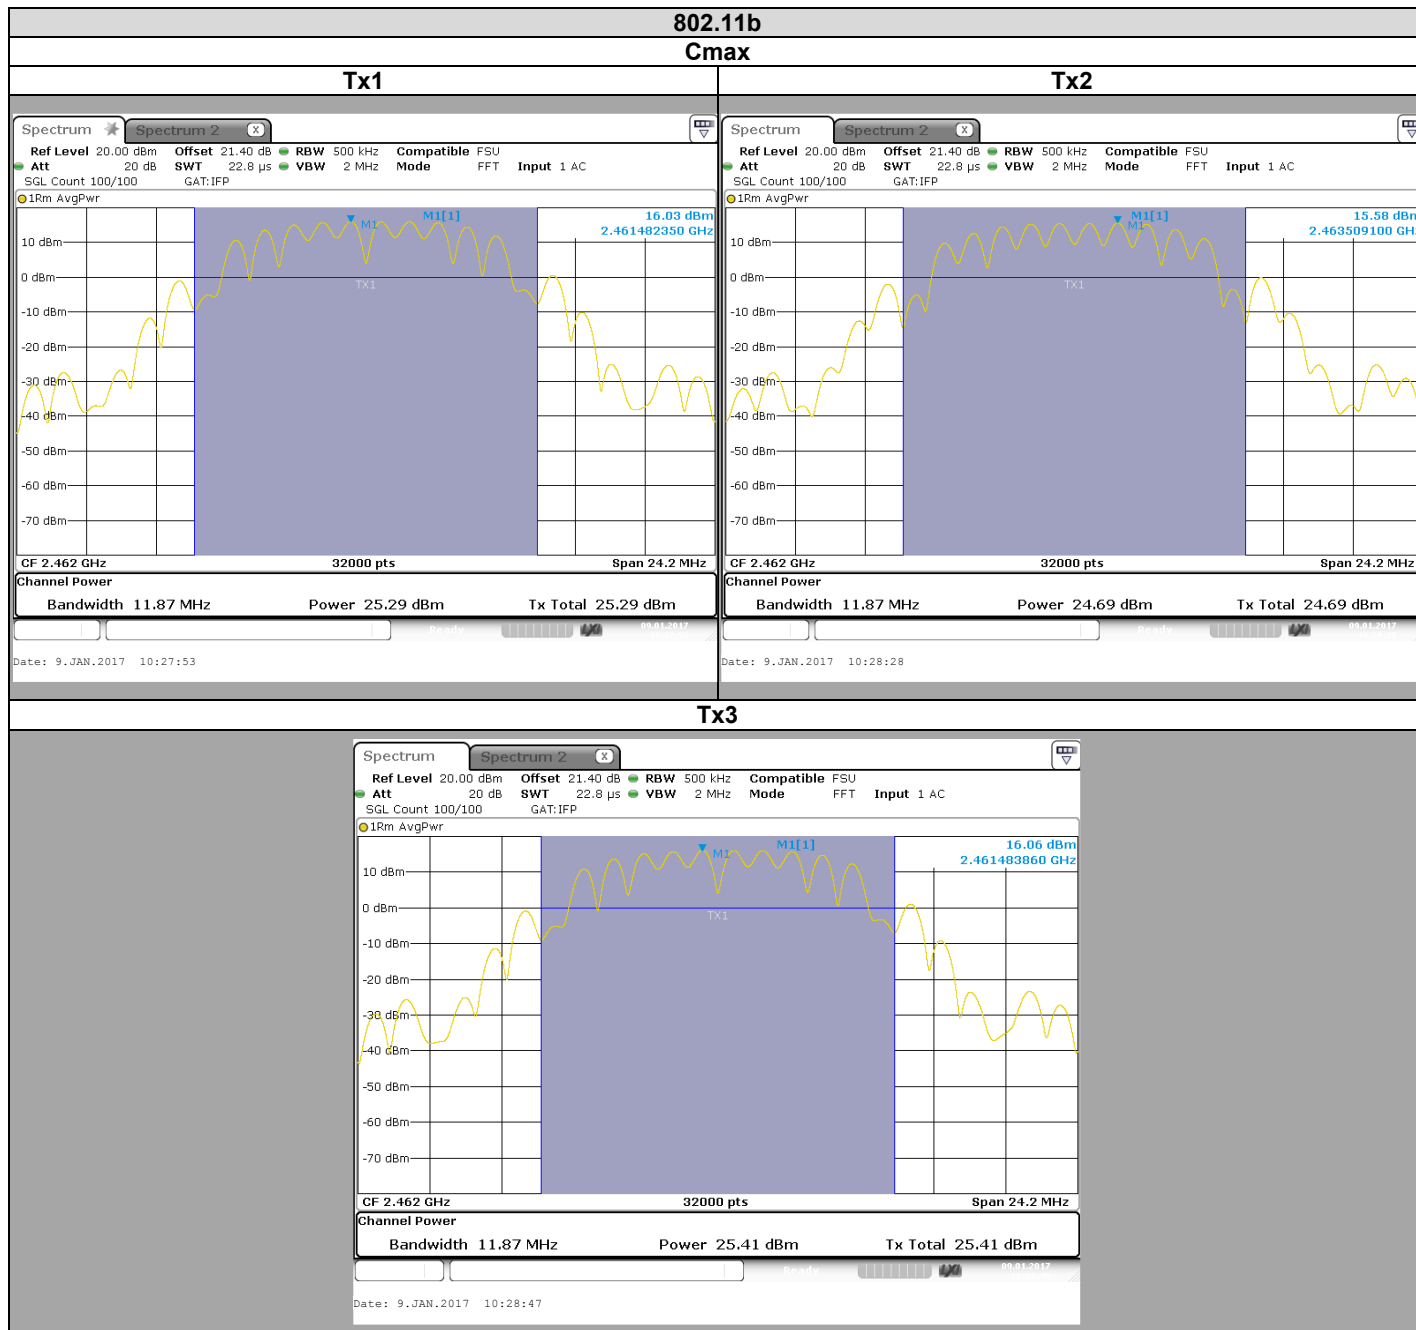


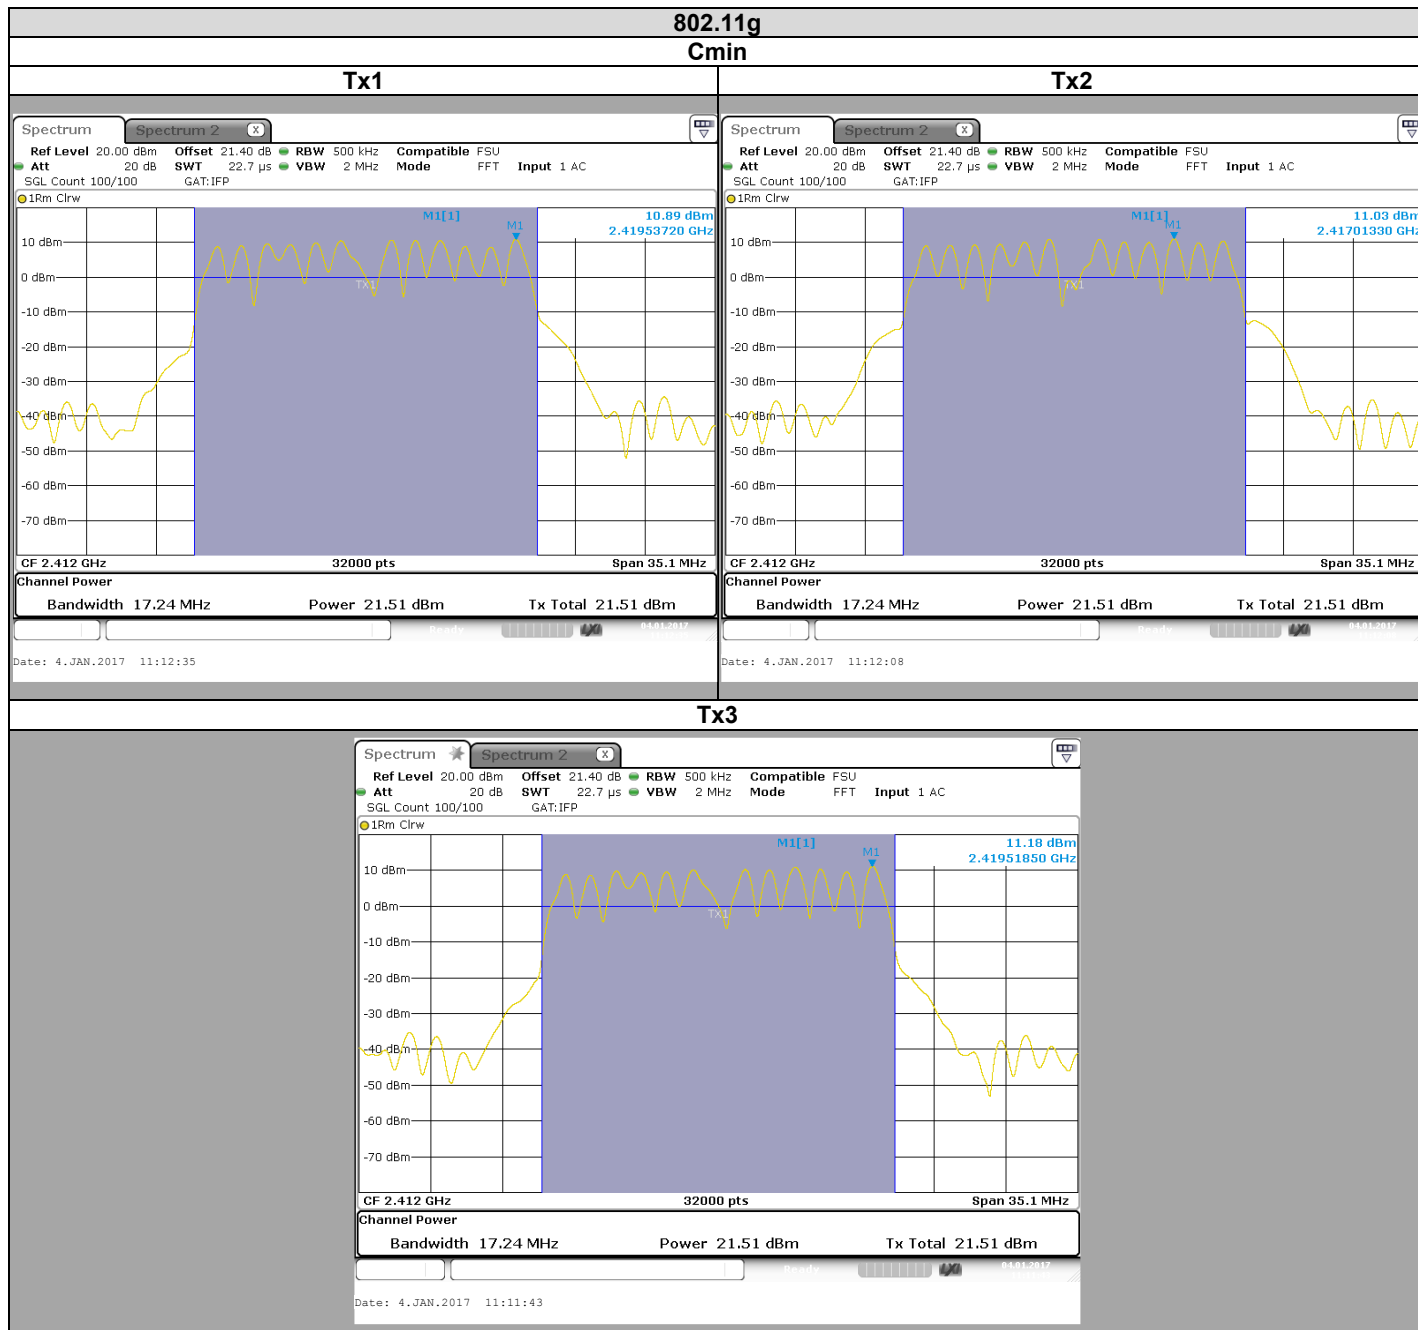


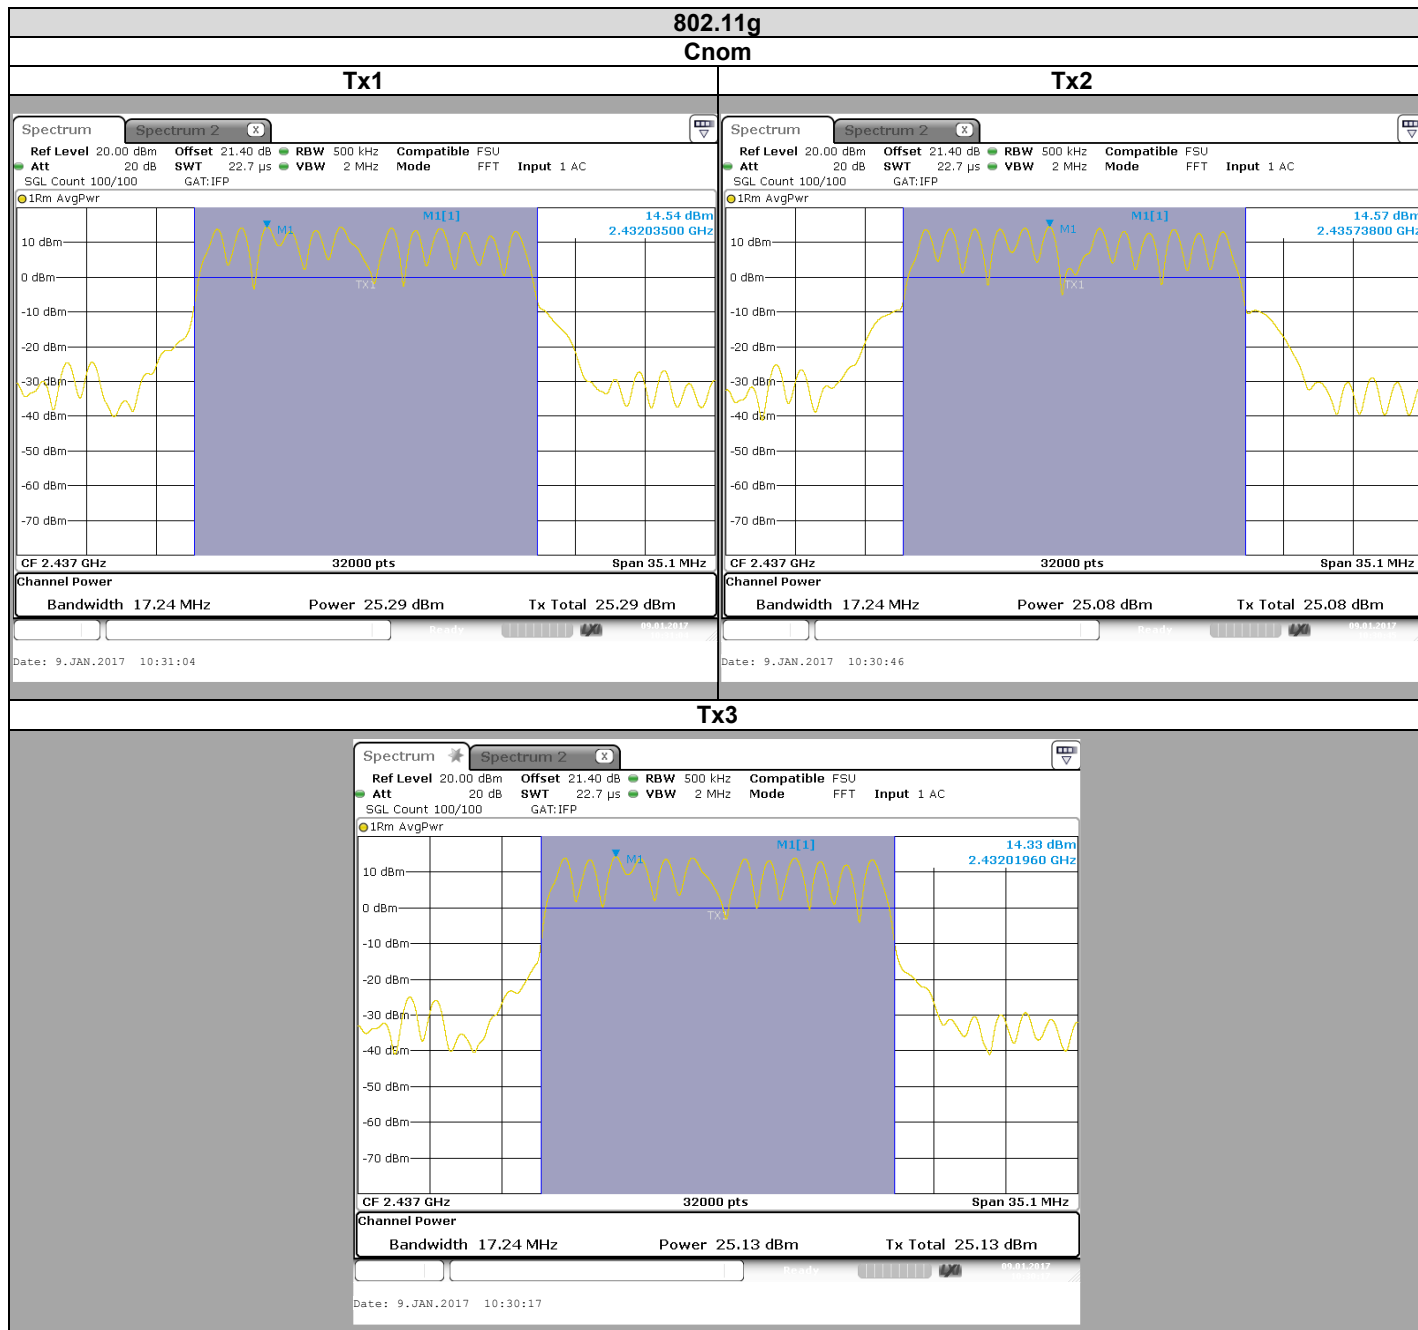


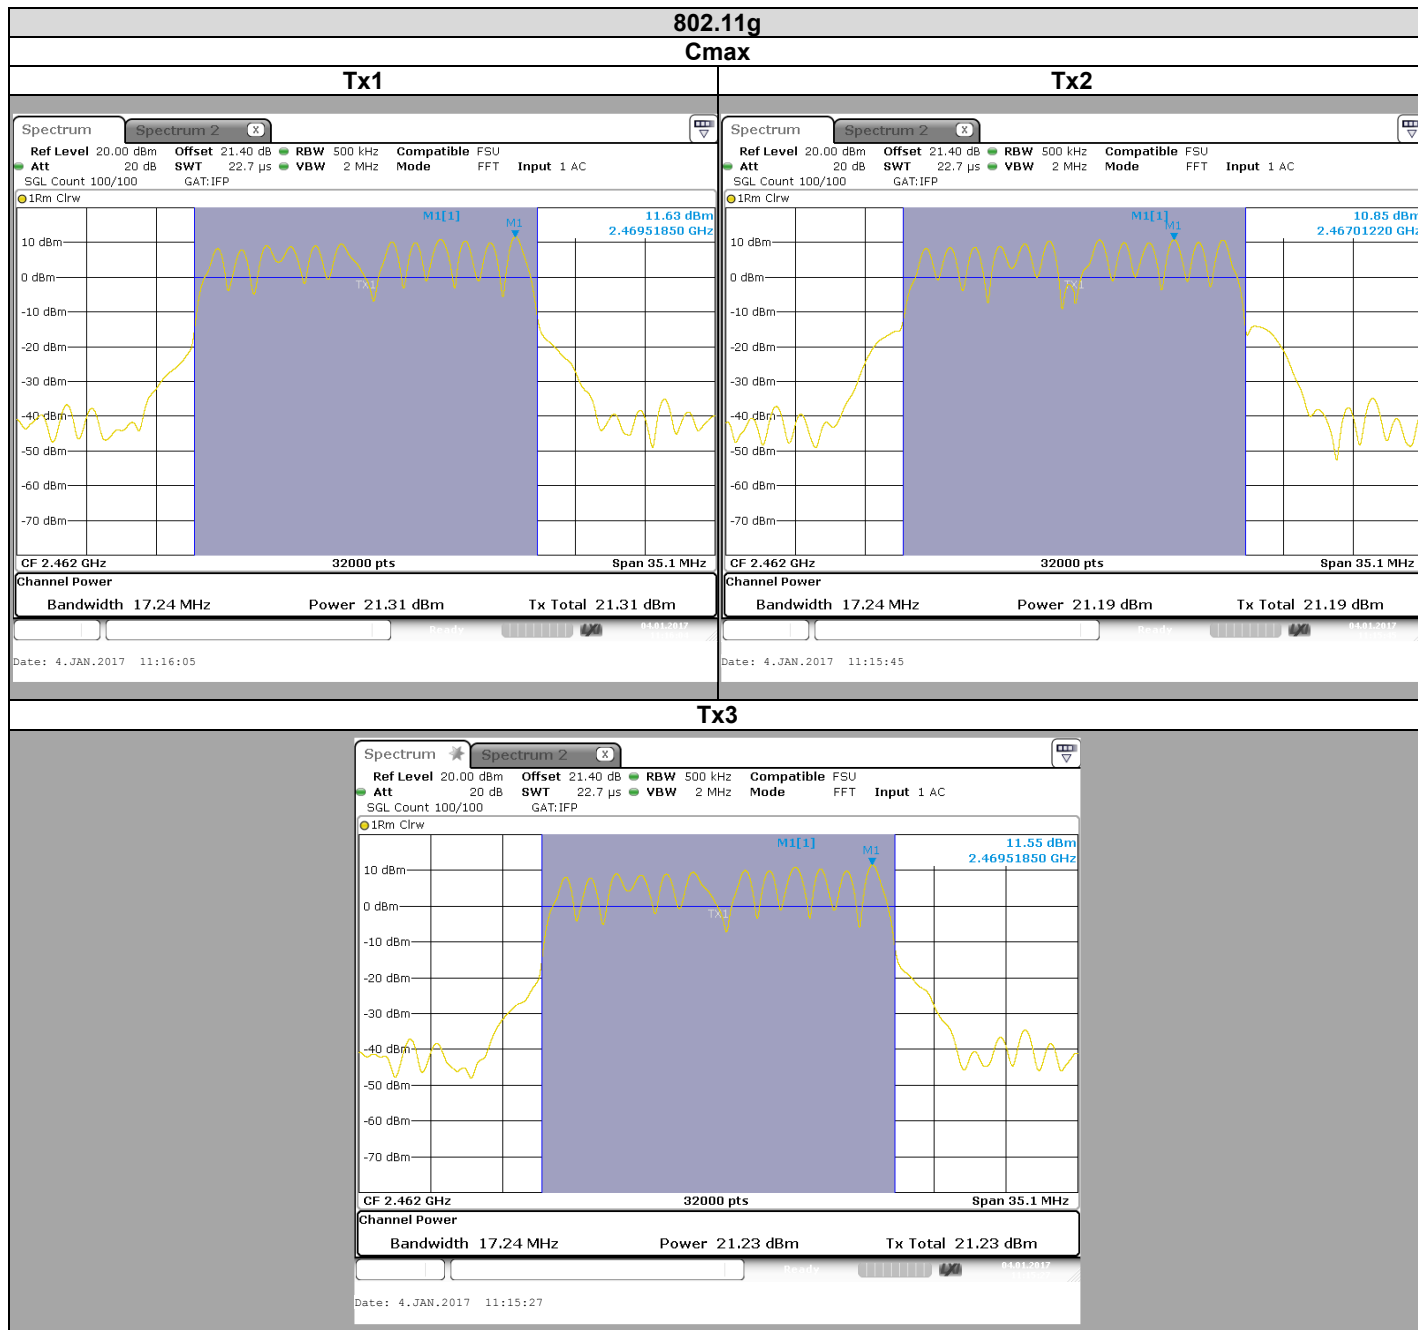


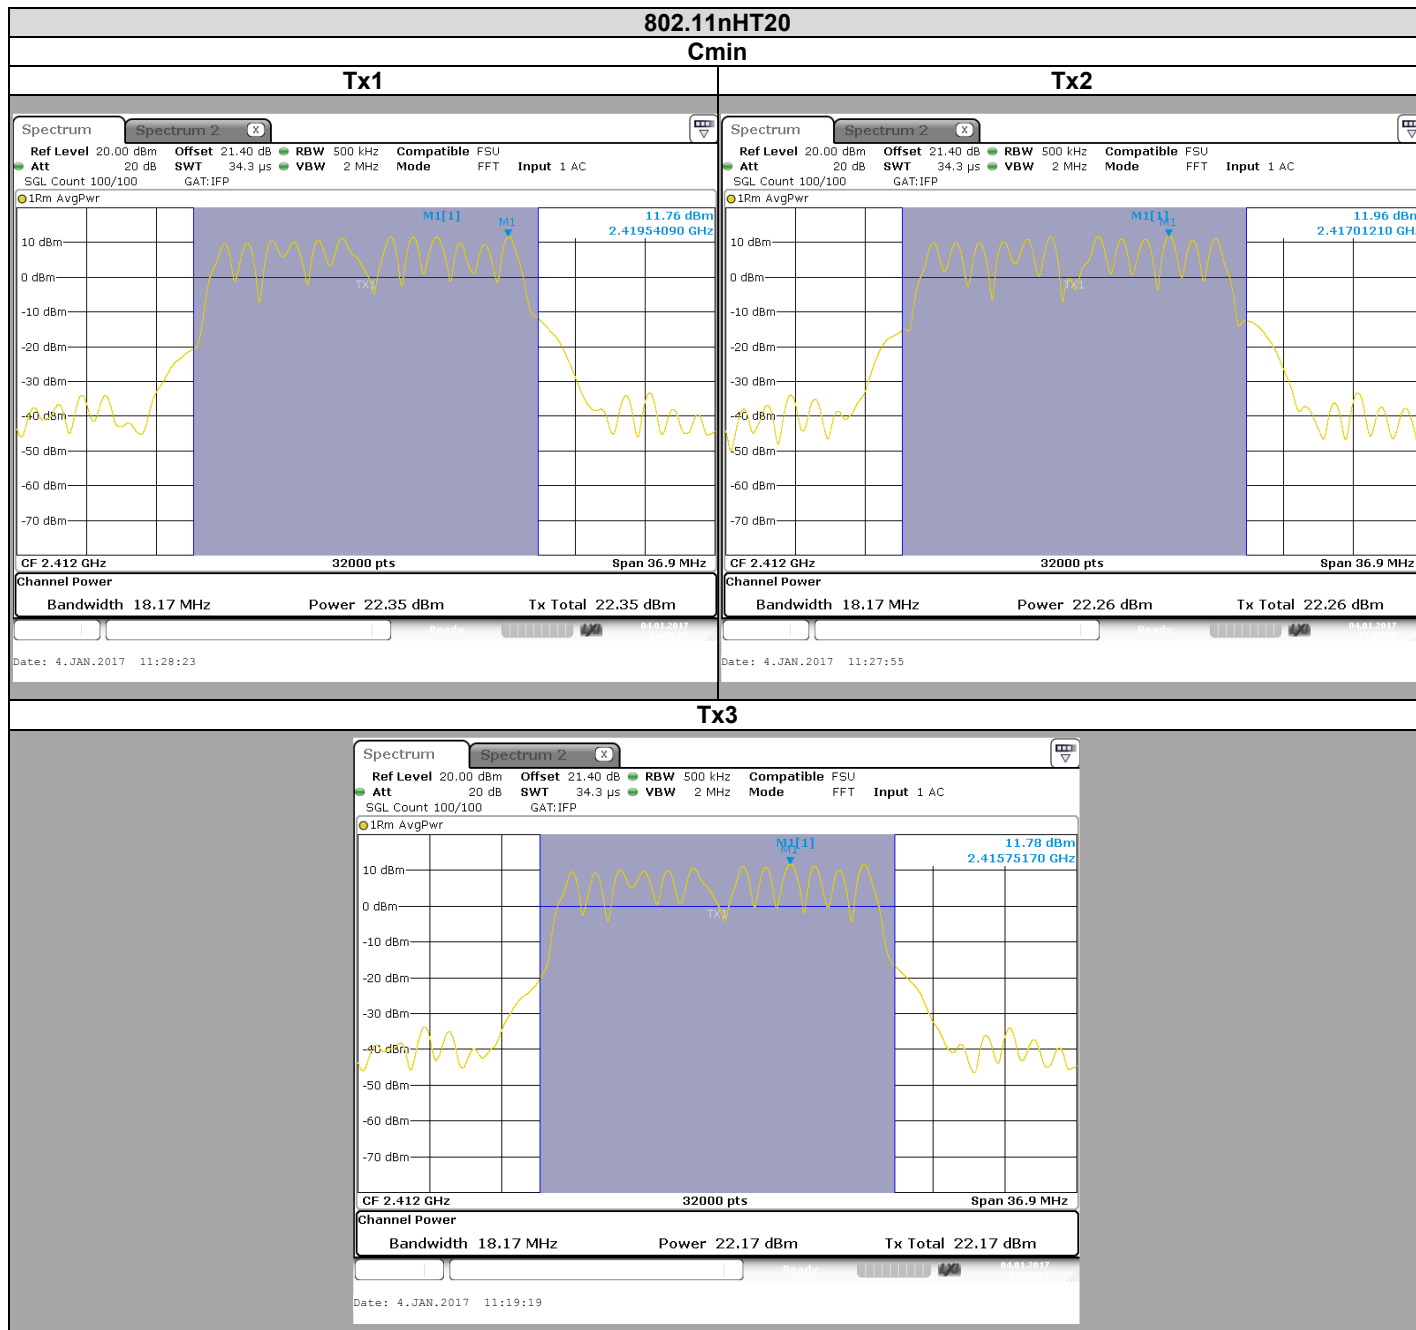


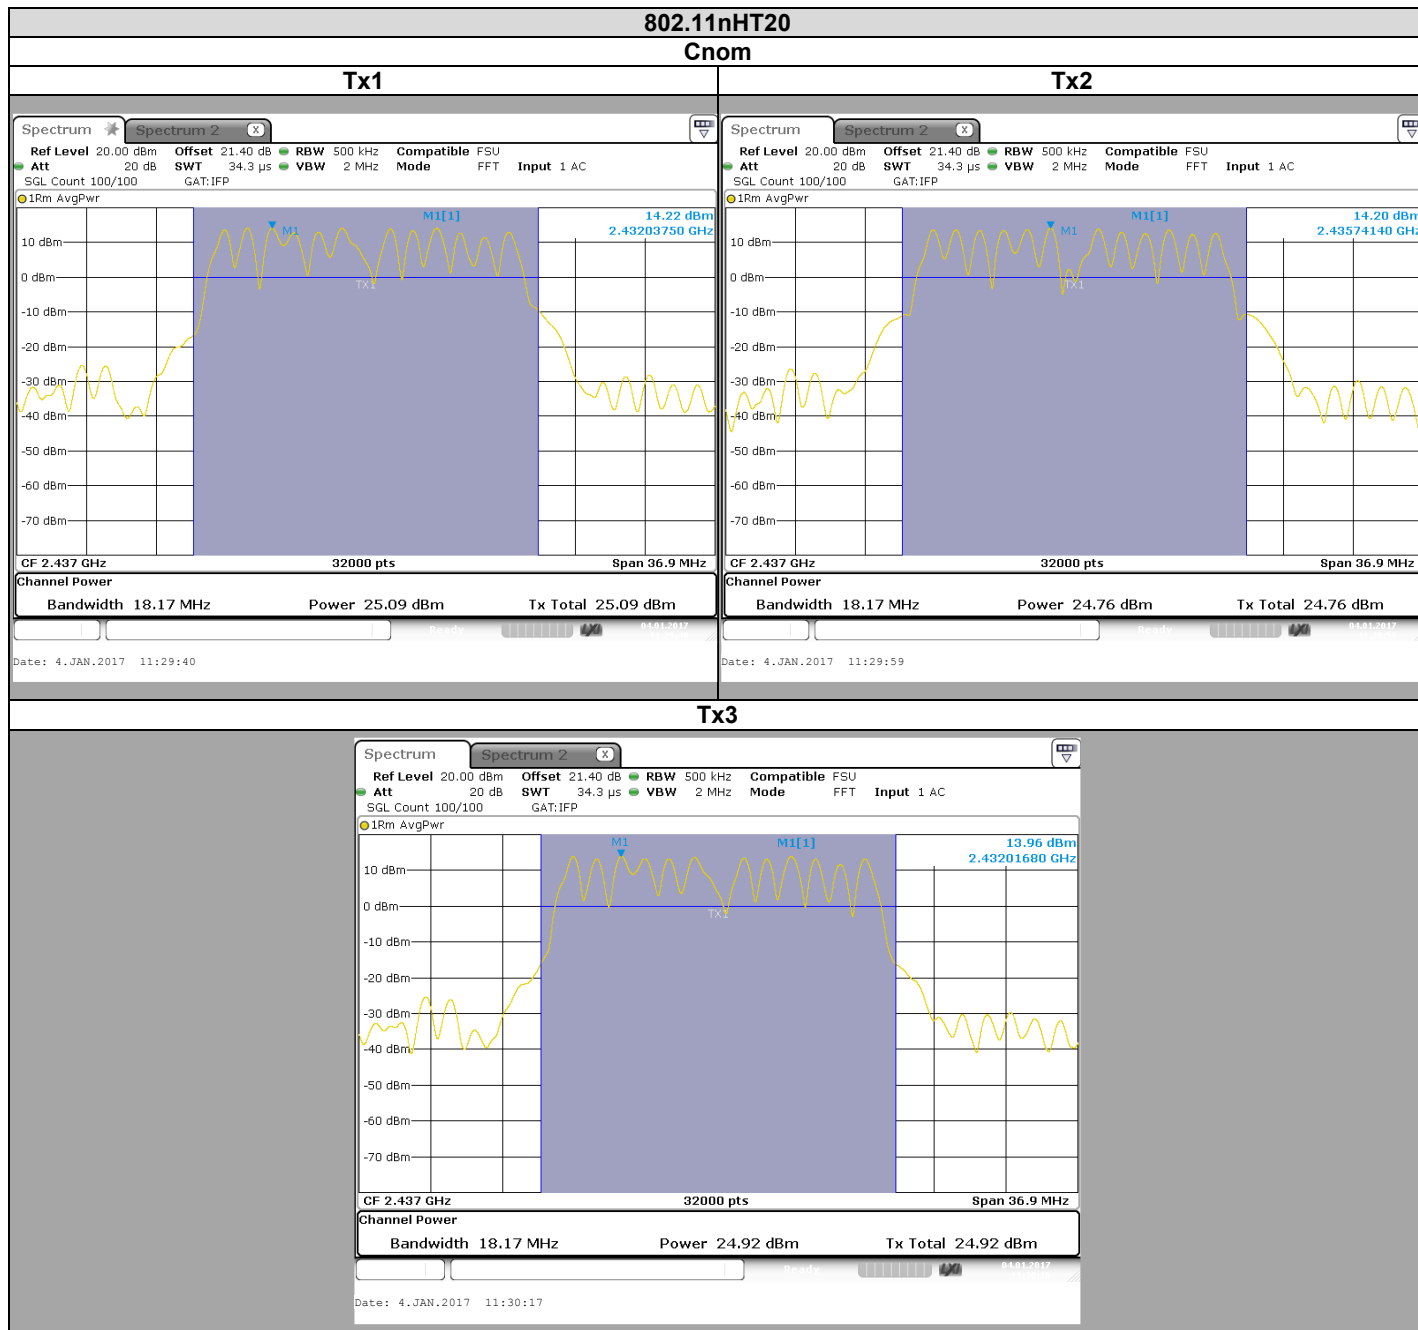

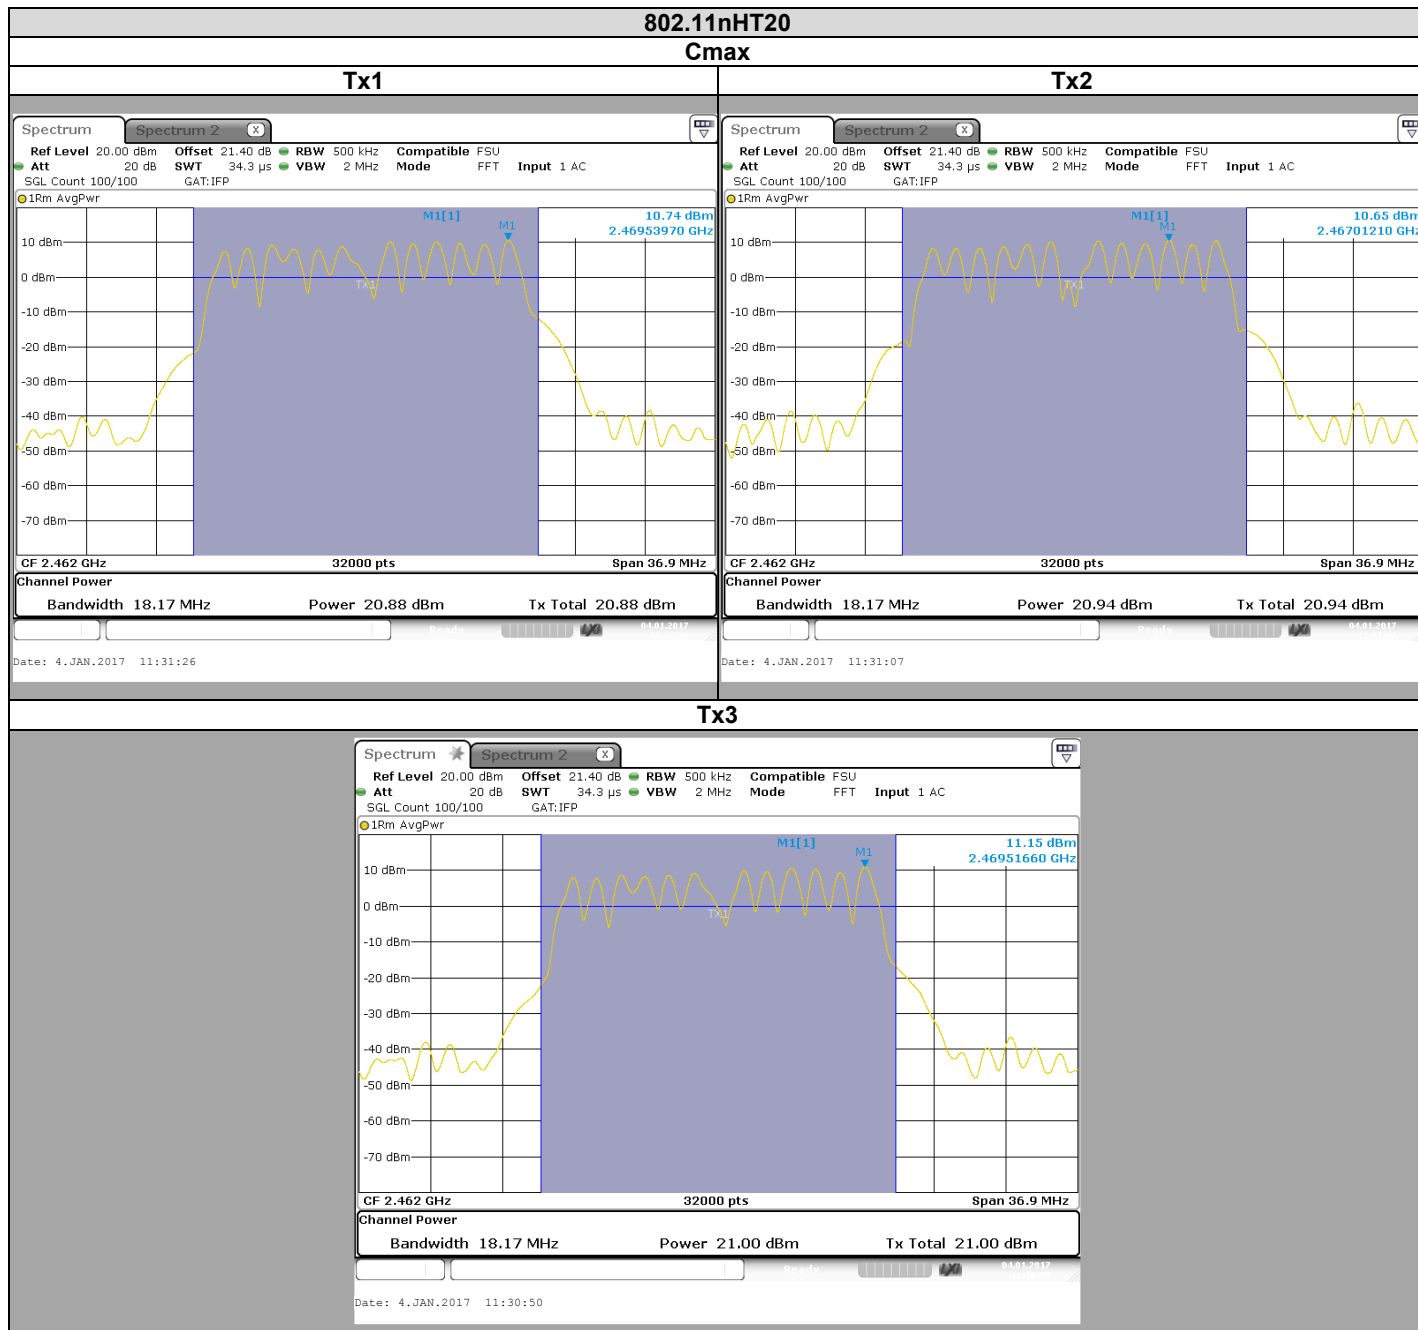

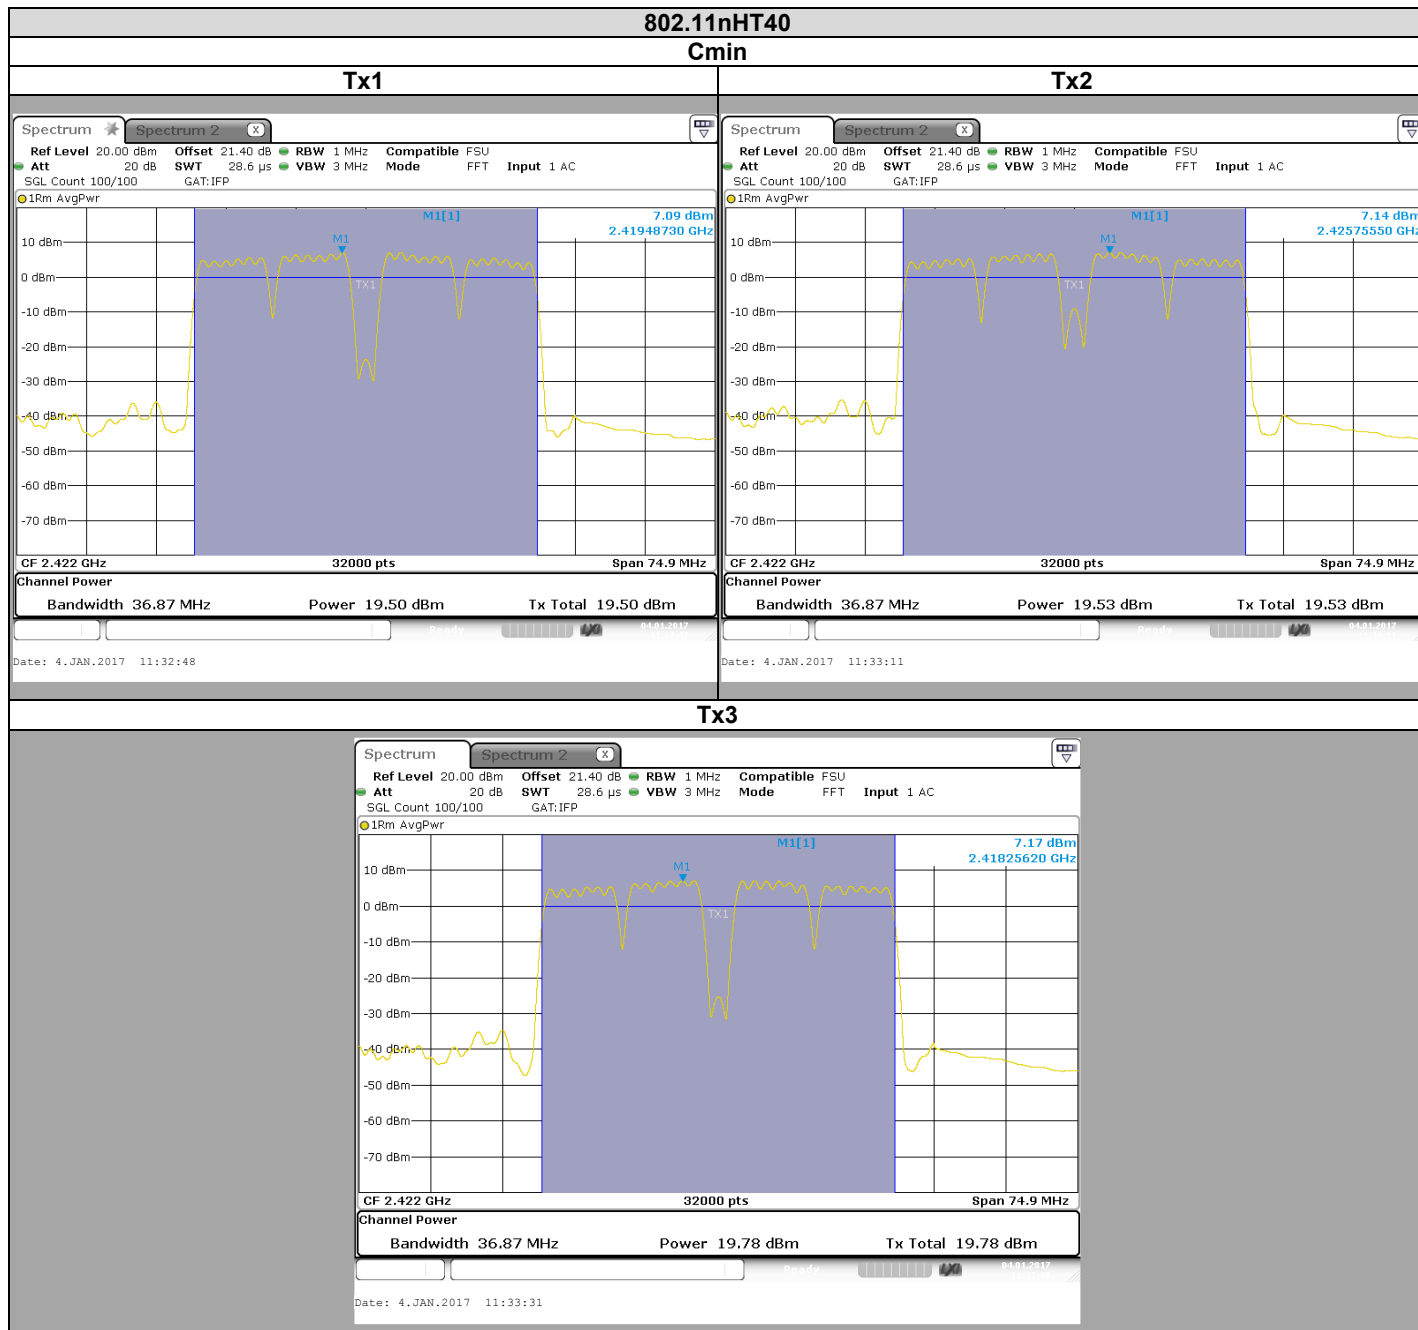

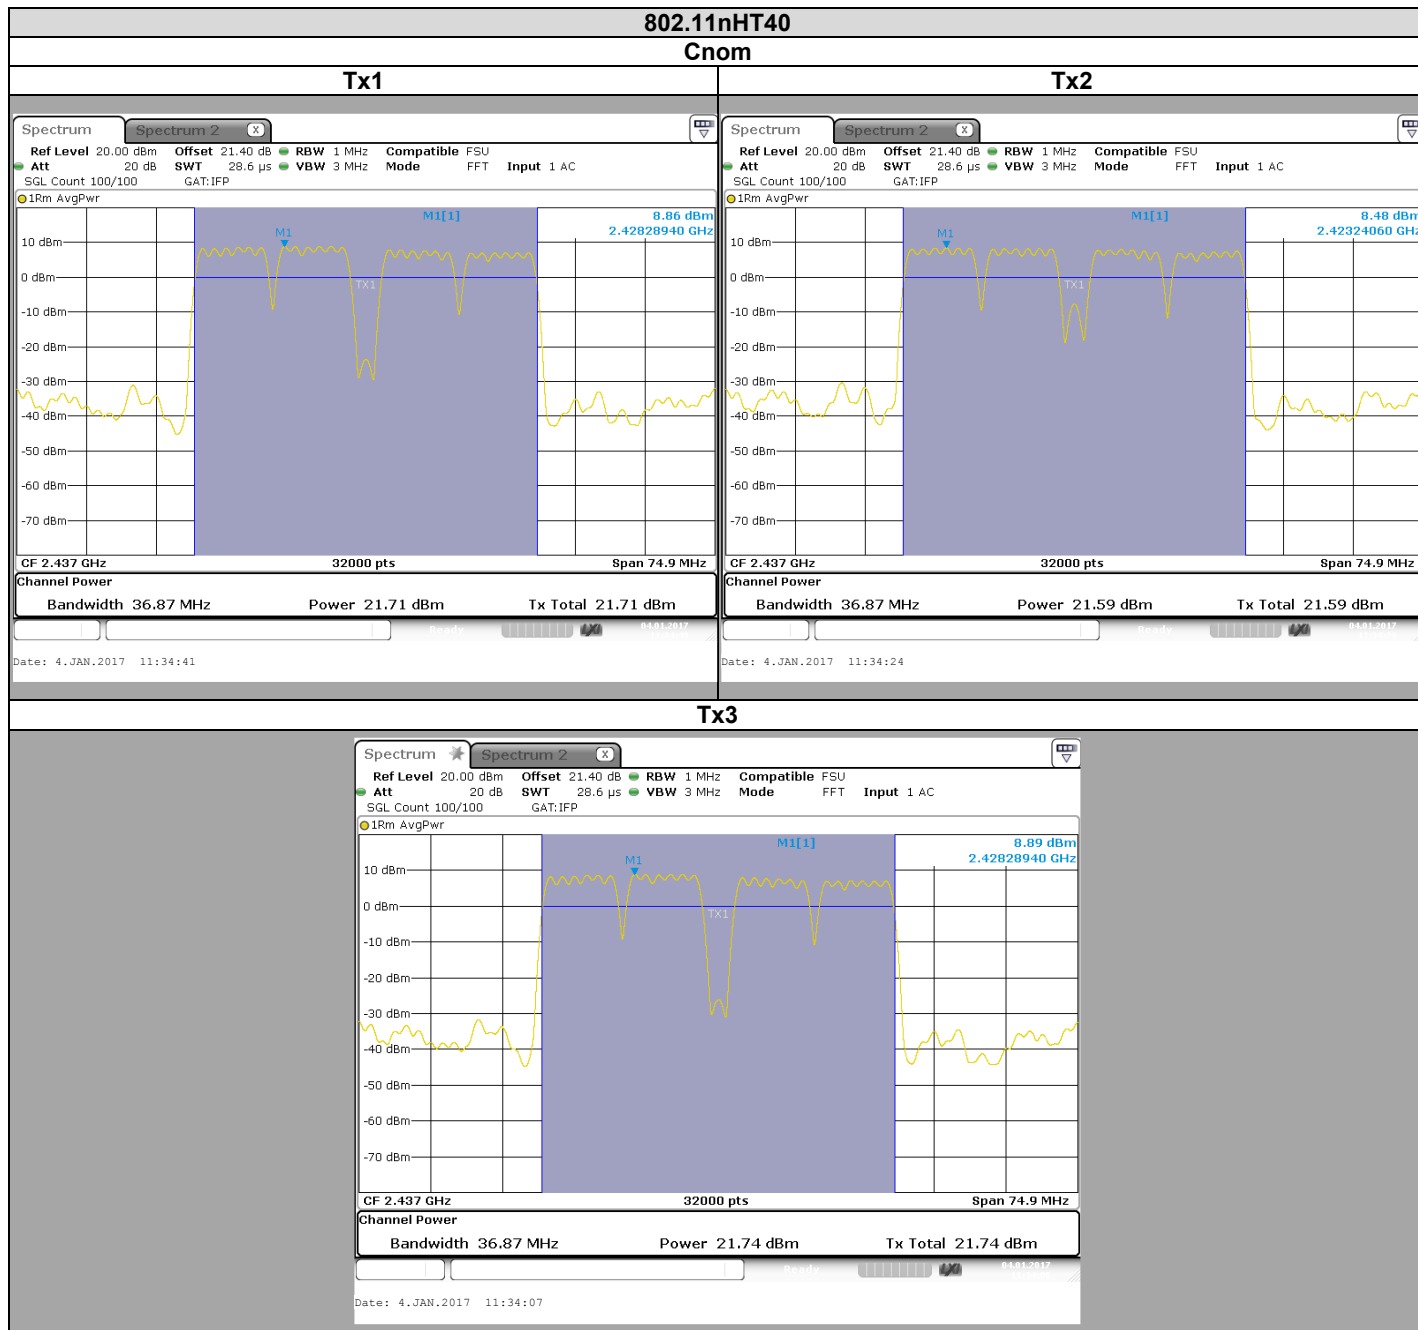

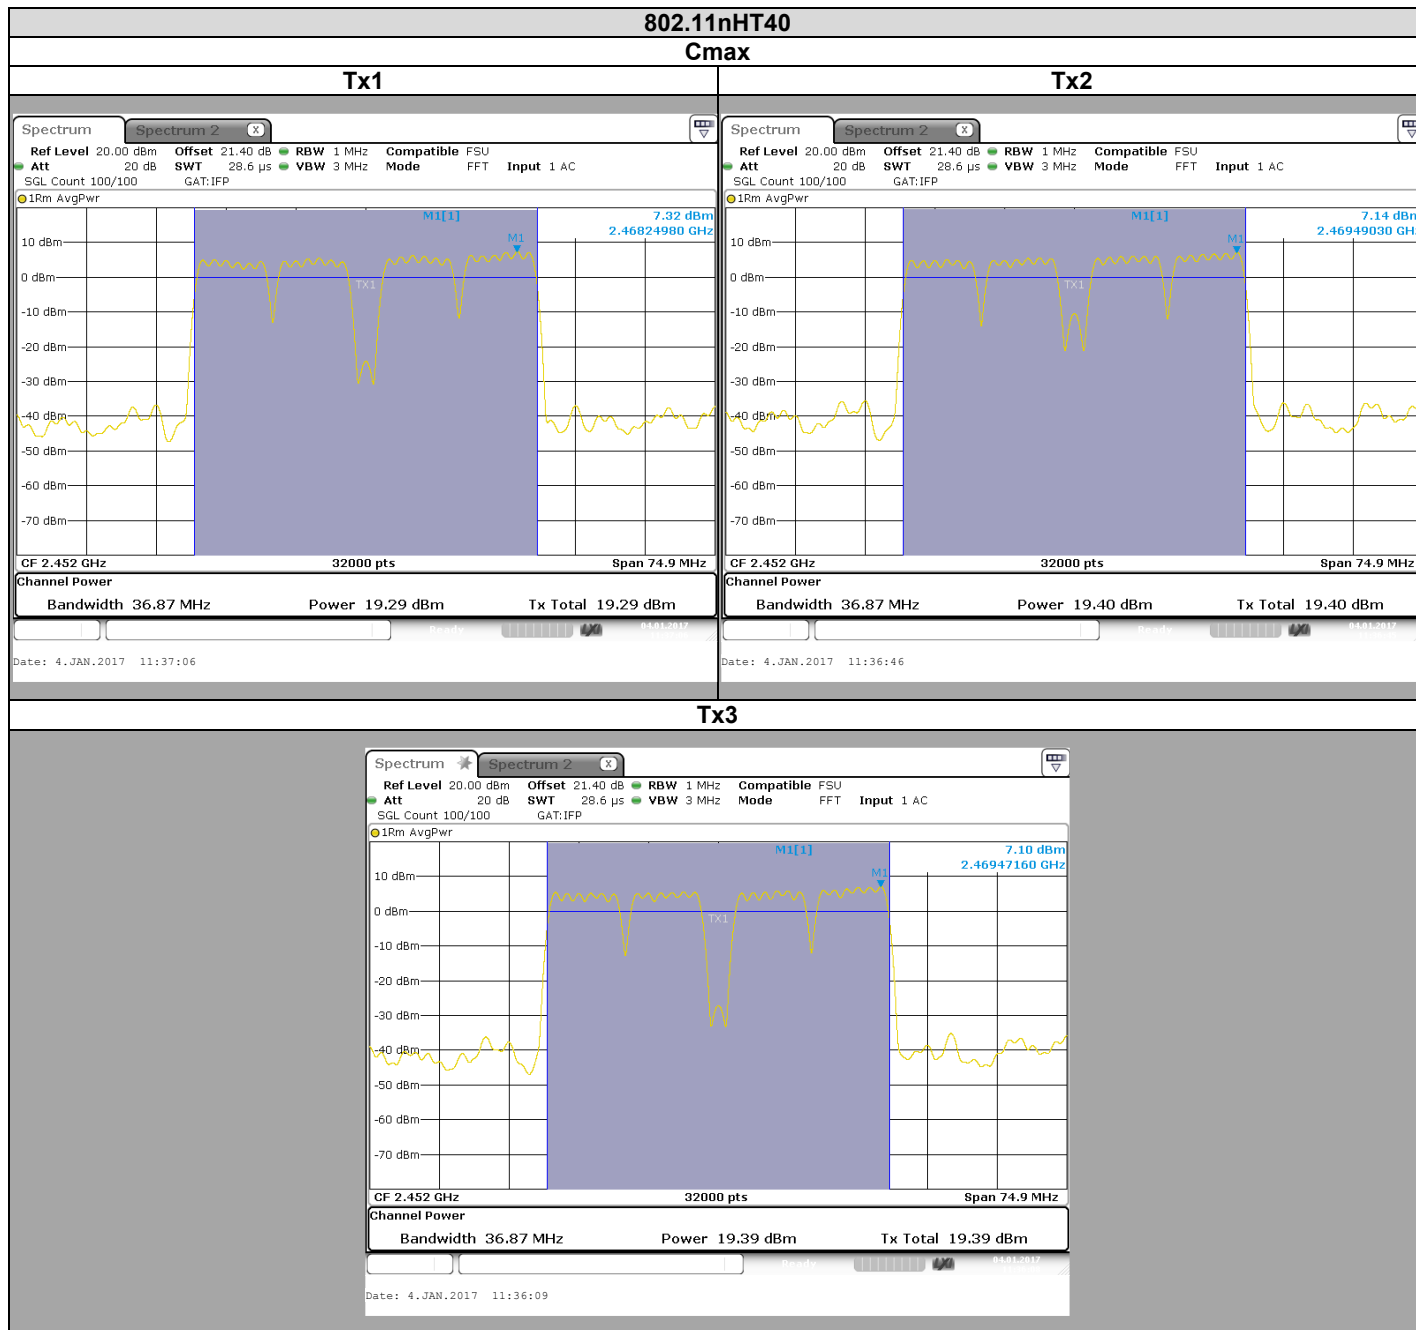



Spectrum Analyzer Offset:
Cable Loss=1,4dB + Attenuator= 21,4dB

802.11b							
Channel	Tx1 (dBm)	Tx2 (dBm)	Tx3 (dBm)	Tx4 (dBm)	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	25,03	24,27	25,23		5,00	29,63	30
Cnom	24,99	24,31	25,49		5,00	29,73	30
Cmax	25,29	24,69	25,41		5,00	29,91	30

802.11g							
Channel	Tx1 (dBm)	Tx2 (dBm)	Tx3 (dBm)	Tx4 (dBm)	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	21,51	21,51	21,51		5,00	26,28	30
Cnom	25,29	25,08	25,13		5,00	29,93	30
Cmax	21,31	21,19	21,23		5,00	26,01	30

802.11n HT20							
Channel	Tx1 (dBm)	Tx2 (dBm)	Tx3 (dBm)	Tx4 (dBm)	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	22,35	22,26	22,17		5,00	27,03	30
Cnom	25,09	24,76	24,92		5,00	29,70	30
Cmax	20,88	20,94	21		5,00	25,71	30

802.11n HT40							
Channel	Tx1 (dBm)	Tx2 (dBm)	Tx3 (dBm)	Tx4 (dBm)	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	19,5	19,53	19,78		5,00	24,38	30
Cnom	21,71	21,59	21,74		5,00	26,45	30
Cmax	19,29	19,4	19,39		5,00	24,13	30

6.2. CONCLUSION

Maximum Conducted Output Power measurement performed on the sample of the product **SAGEMCOM** MiniBox (253697290), SN: **616476080862**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.

7. POWER SPECTRAL DENSITY

7.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER
Date of test : January 4, 2017 to January 9, 2017
Ambient temperature : 22 °C
Relative humidity : 41 %

7.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☐ KDB 558074 D01 DTS Meas Guidance v03r05 § 10.2 (Method PKPSD)
- ☒ KDB 558074 D01 DTS Meas Guidance v03r05 § 10.3 (Method AVGPSD-1)
- ☒ KDB 662911 D01 Multiple Transmitter Output v02r01

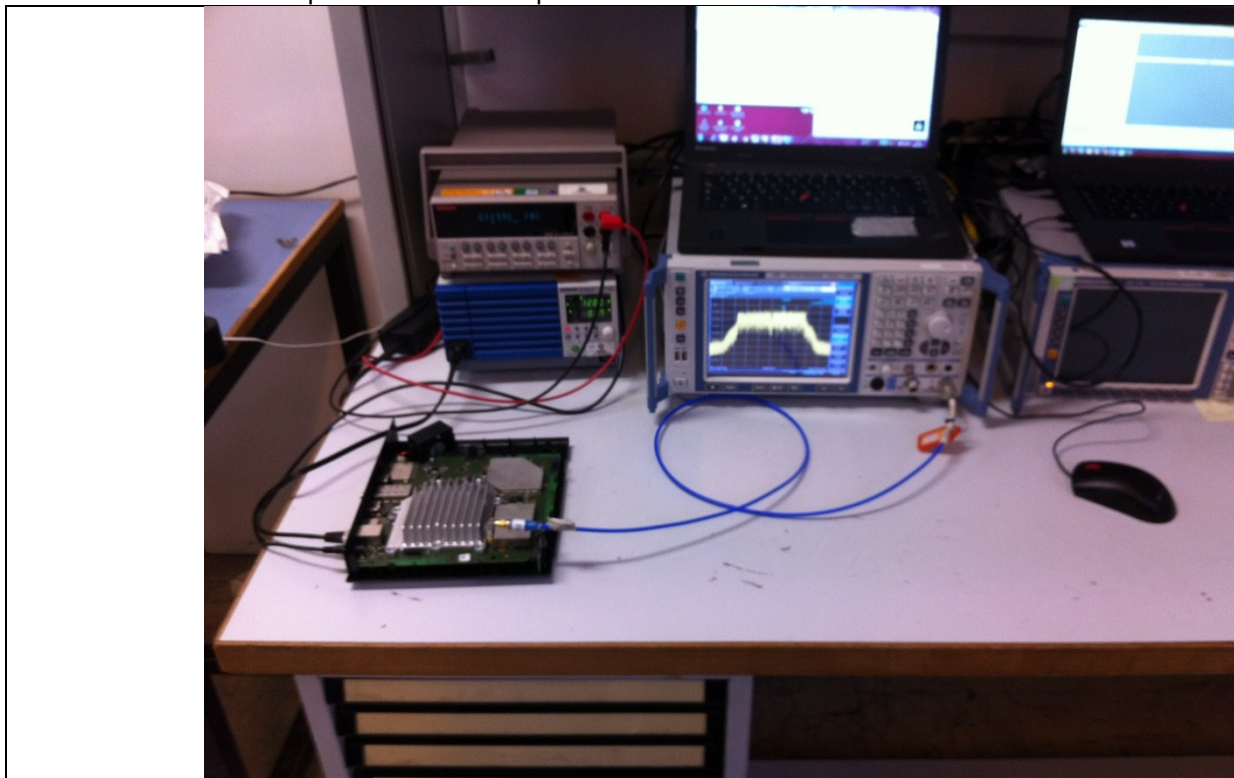

Photograph for Power Spectral Density



7.3. LIMIT

Power Spectral Density:

2400MHz-2483.5MHz: Shall not exceed 8dBm/3kHz


Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi


7.4. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Multi-meter	KEITHLEY	2000	A1242090	2016/05	2018/05
Programmable AC/DC power supply	-; KIKUSUI	PCR500M	A7040079	Verified with calibrated multimeter	Verified with calibrated multimeter
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2016/03	2017/03
RF cable & 20 dB attenuator	Télédyn	920-0202-048	A5329675	2016/10	2017/10


Note: In our quality system, the test equipment calibration due is more & less 2 months


7.1. RESULTS

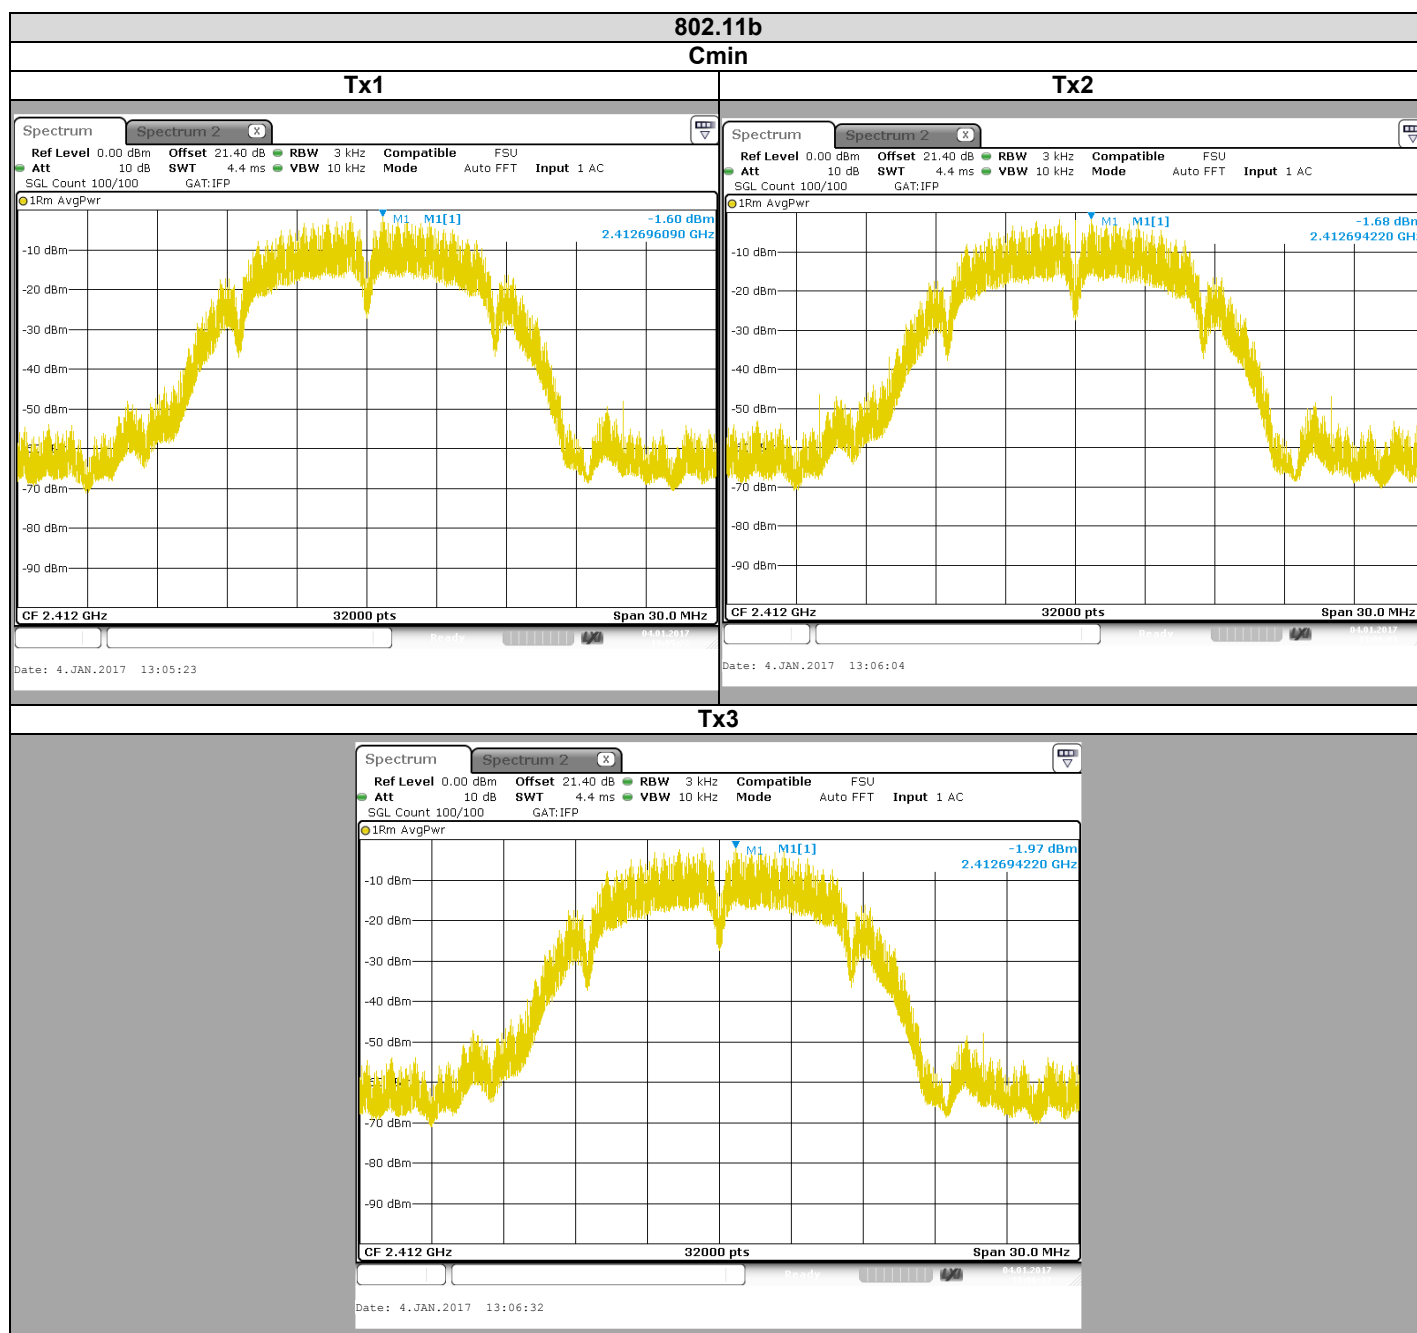


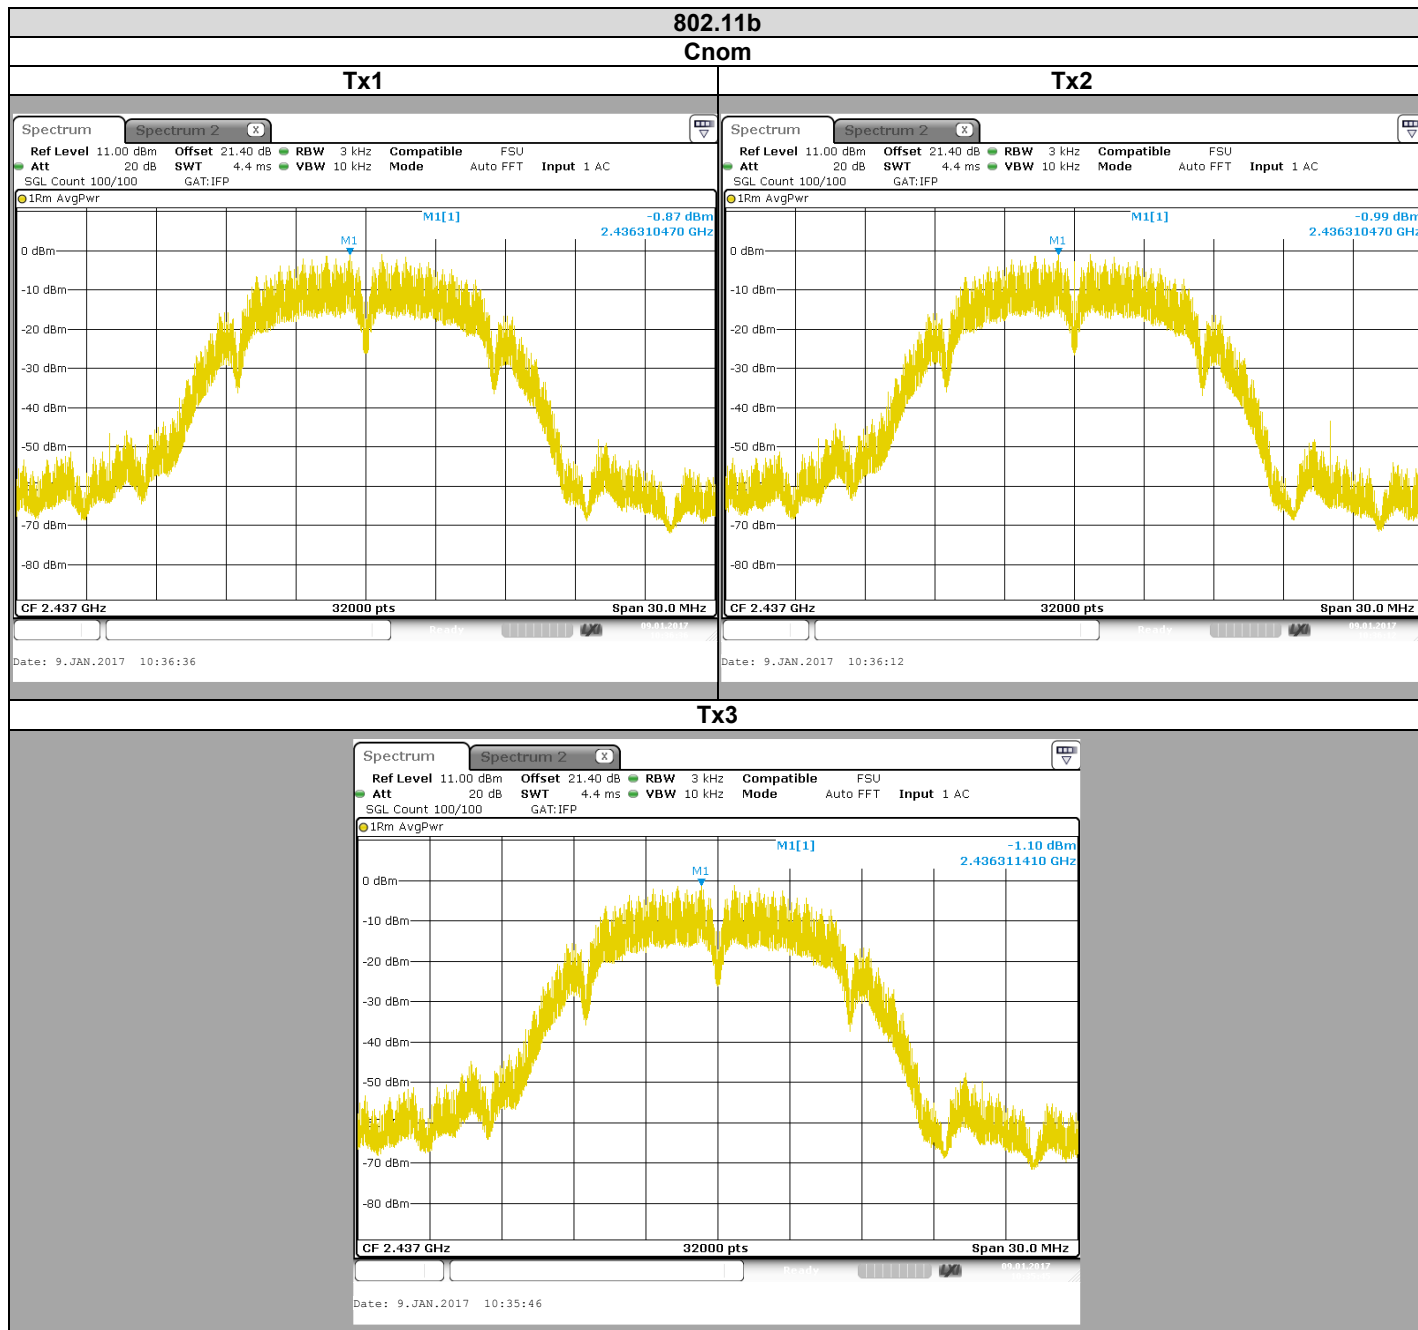


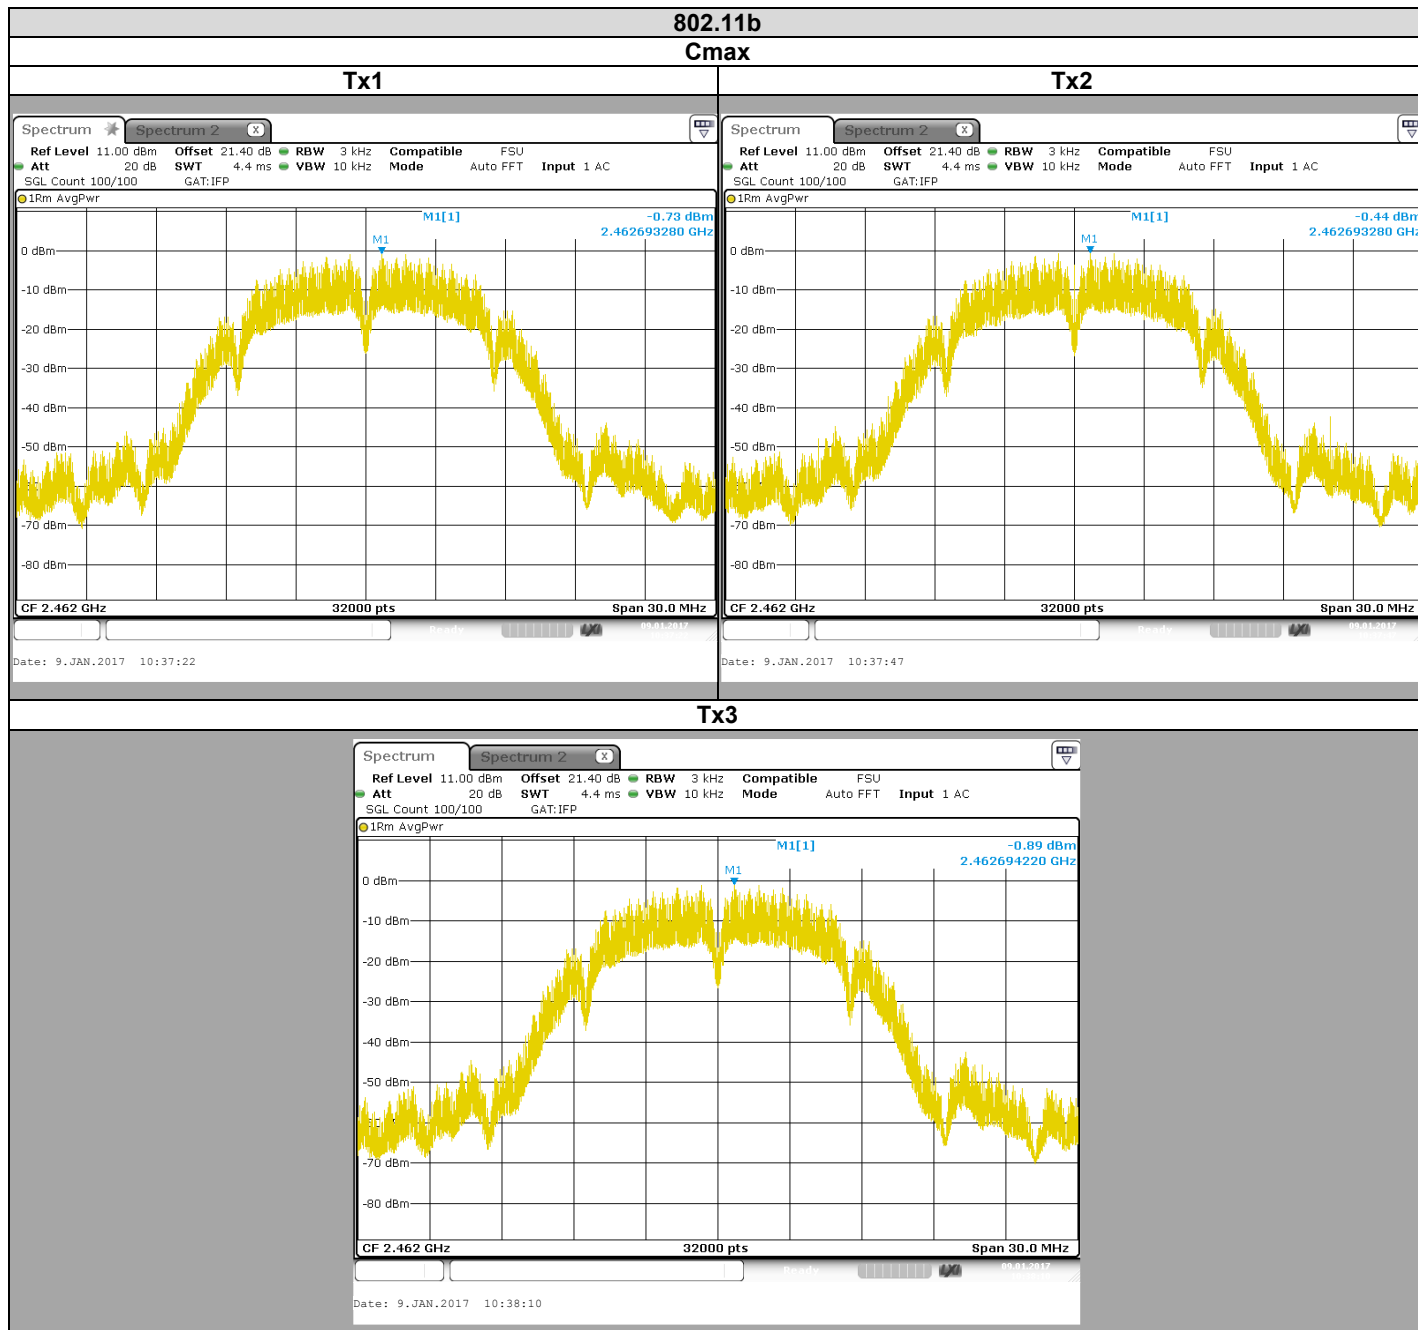


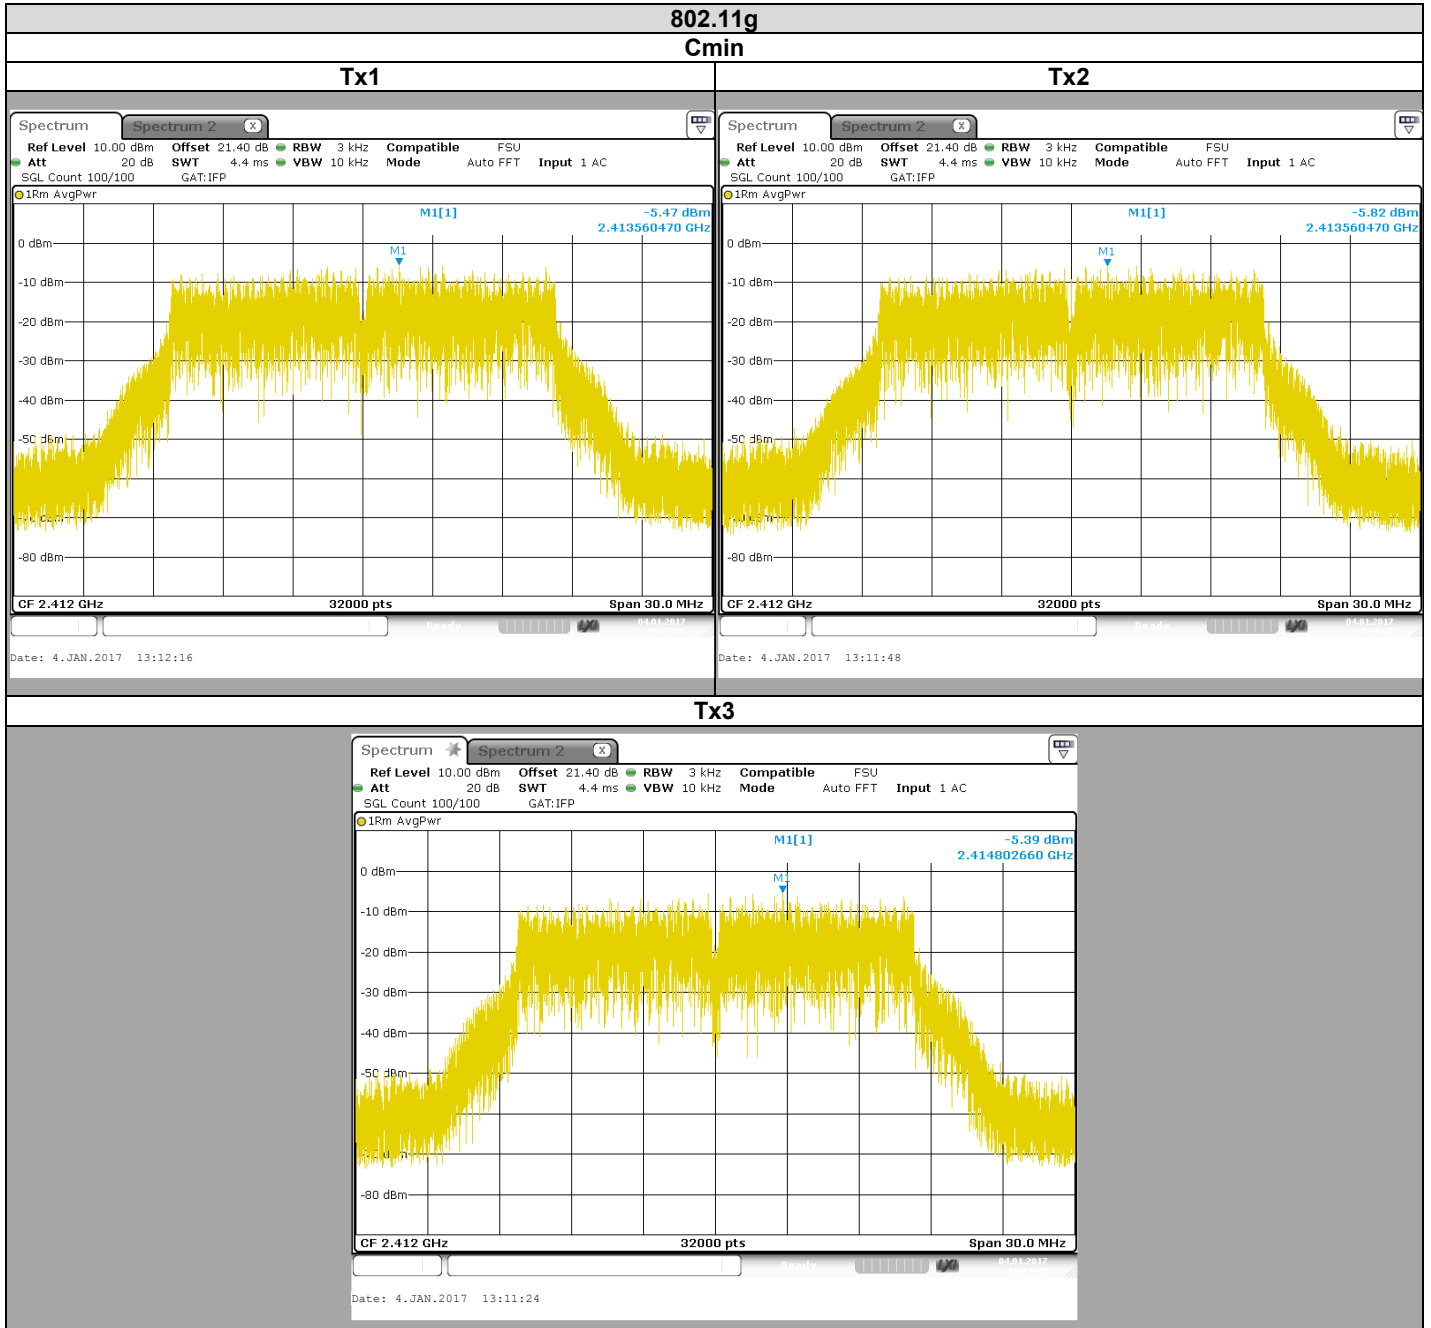


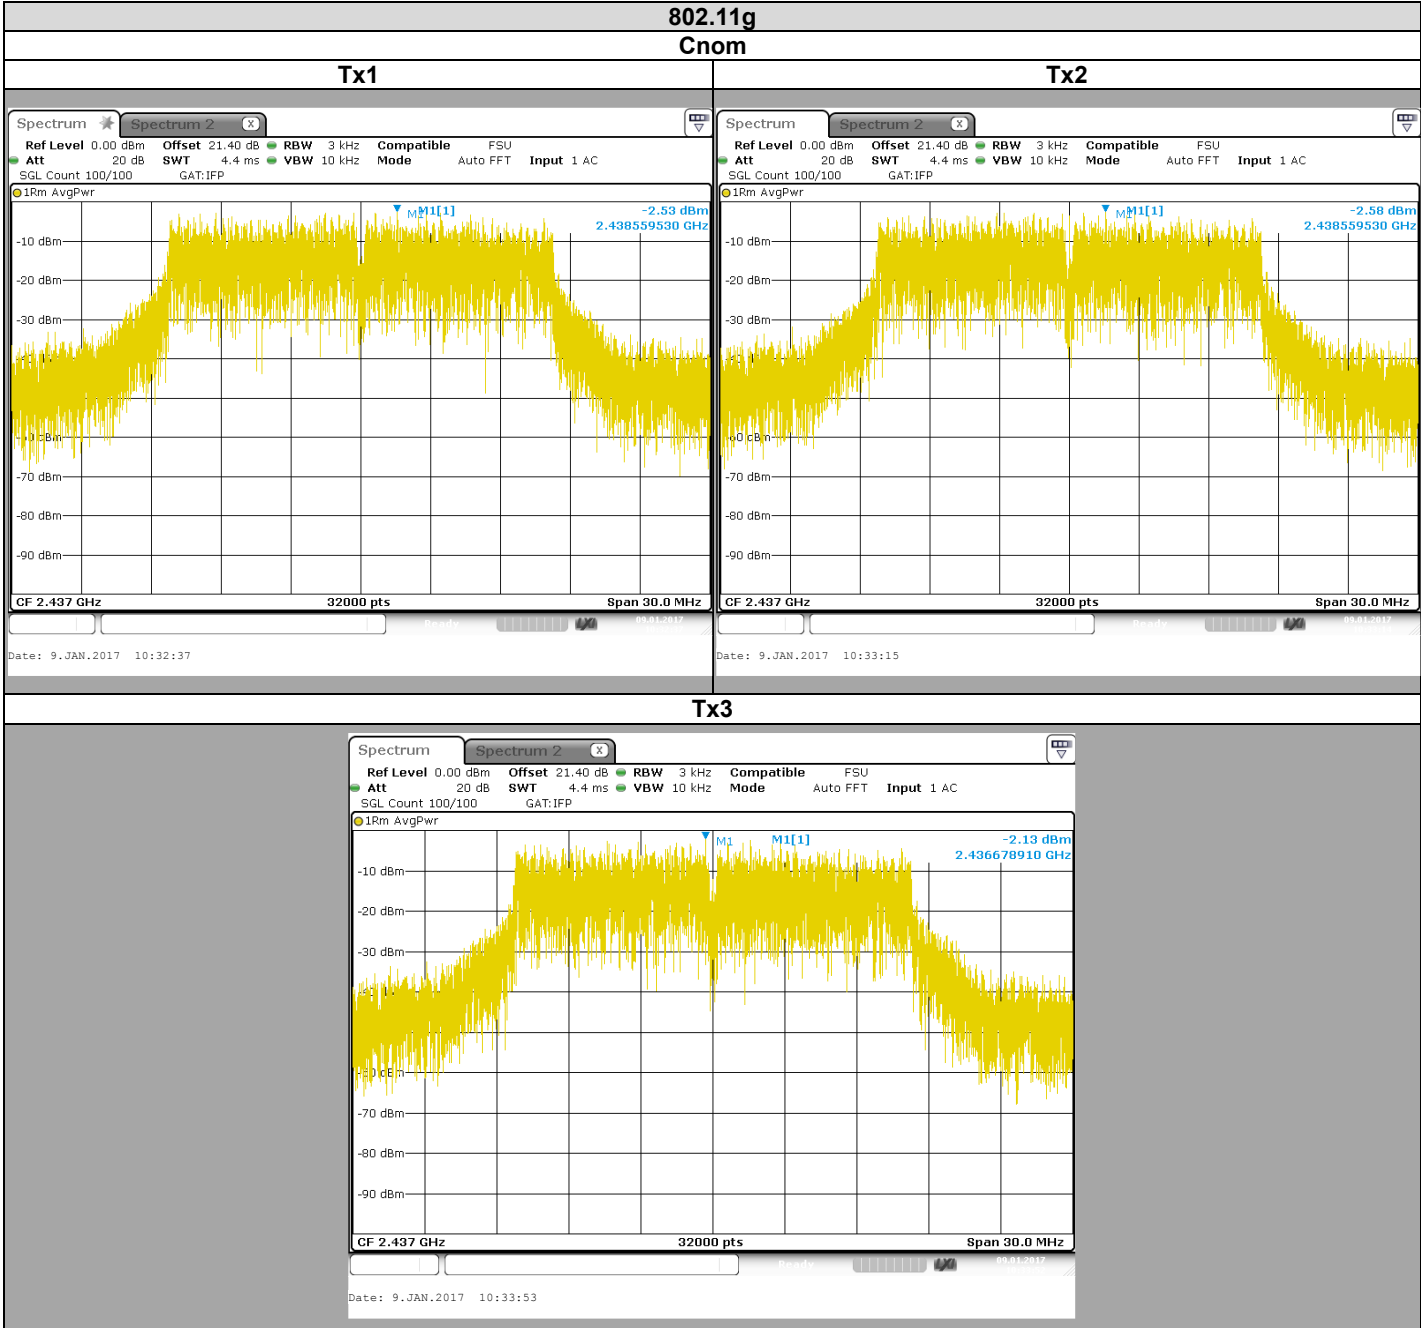


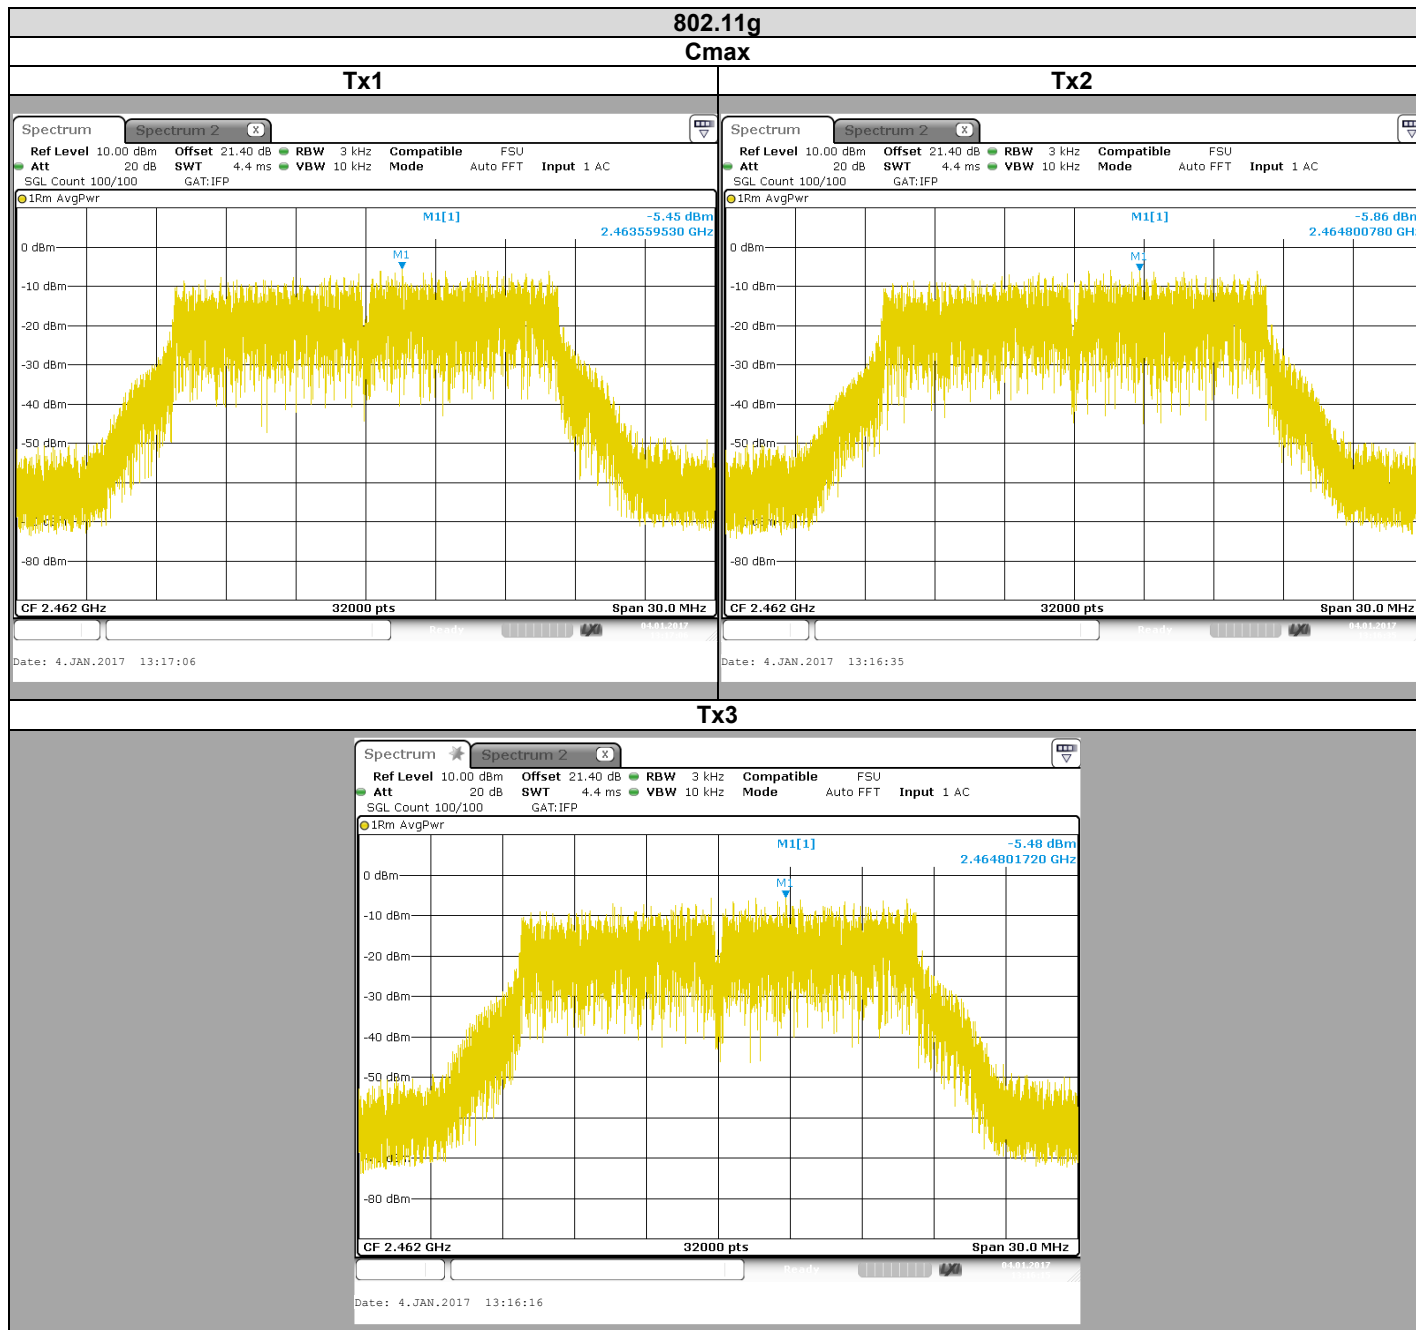


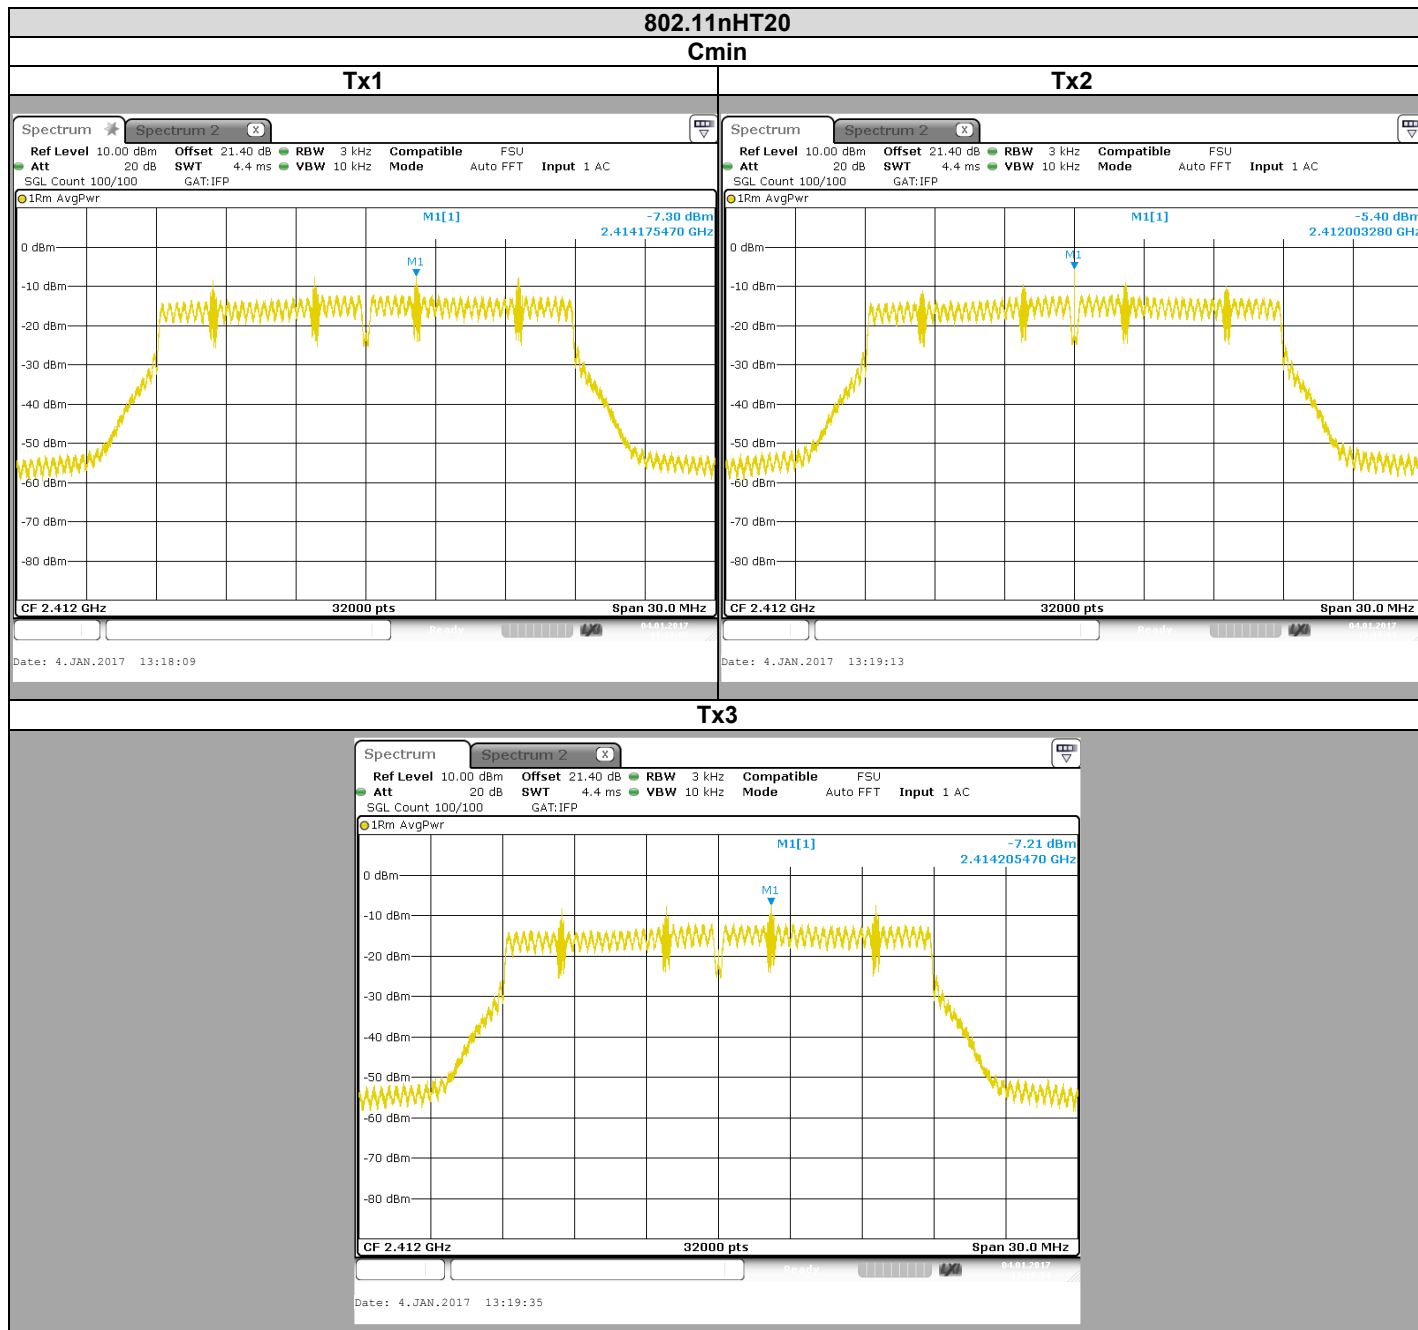


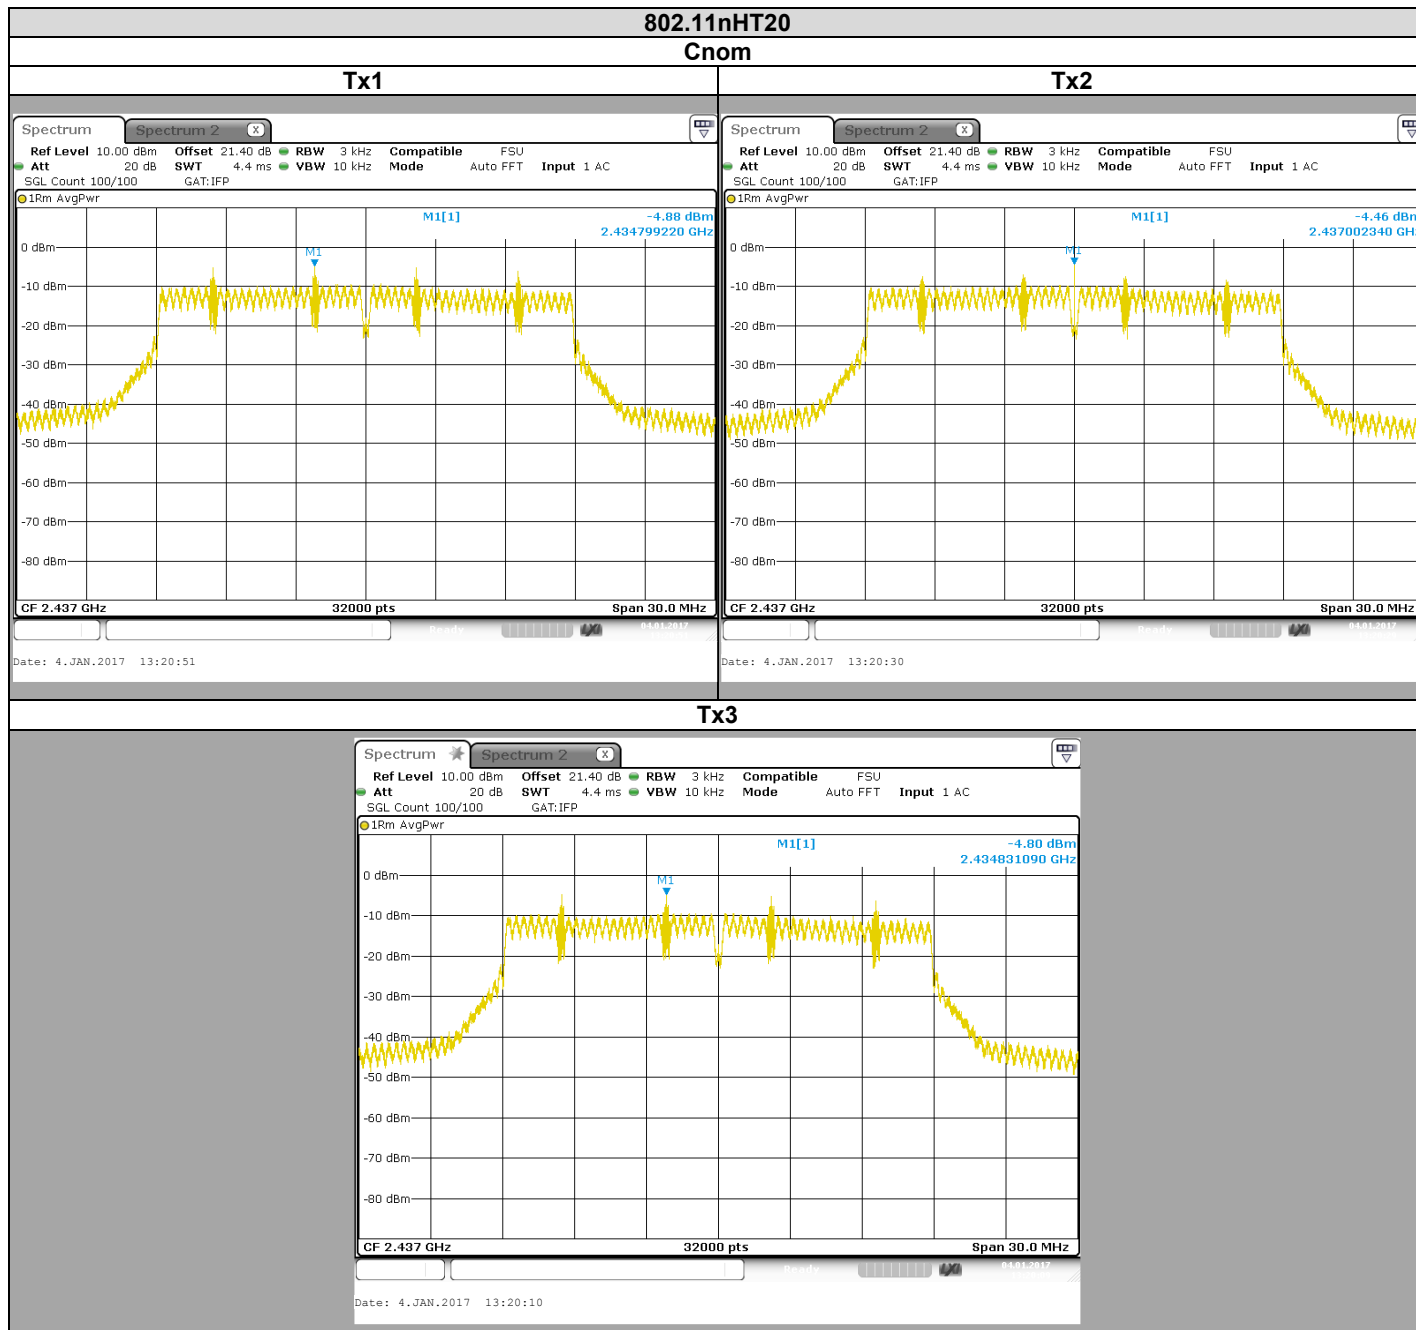

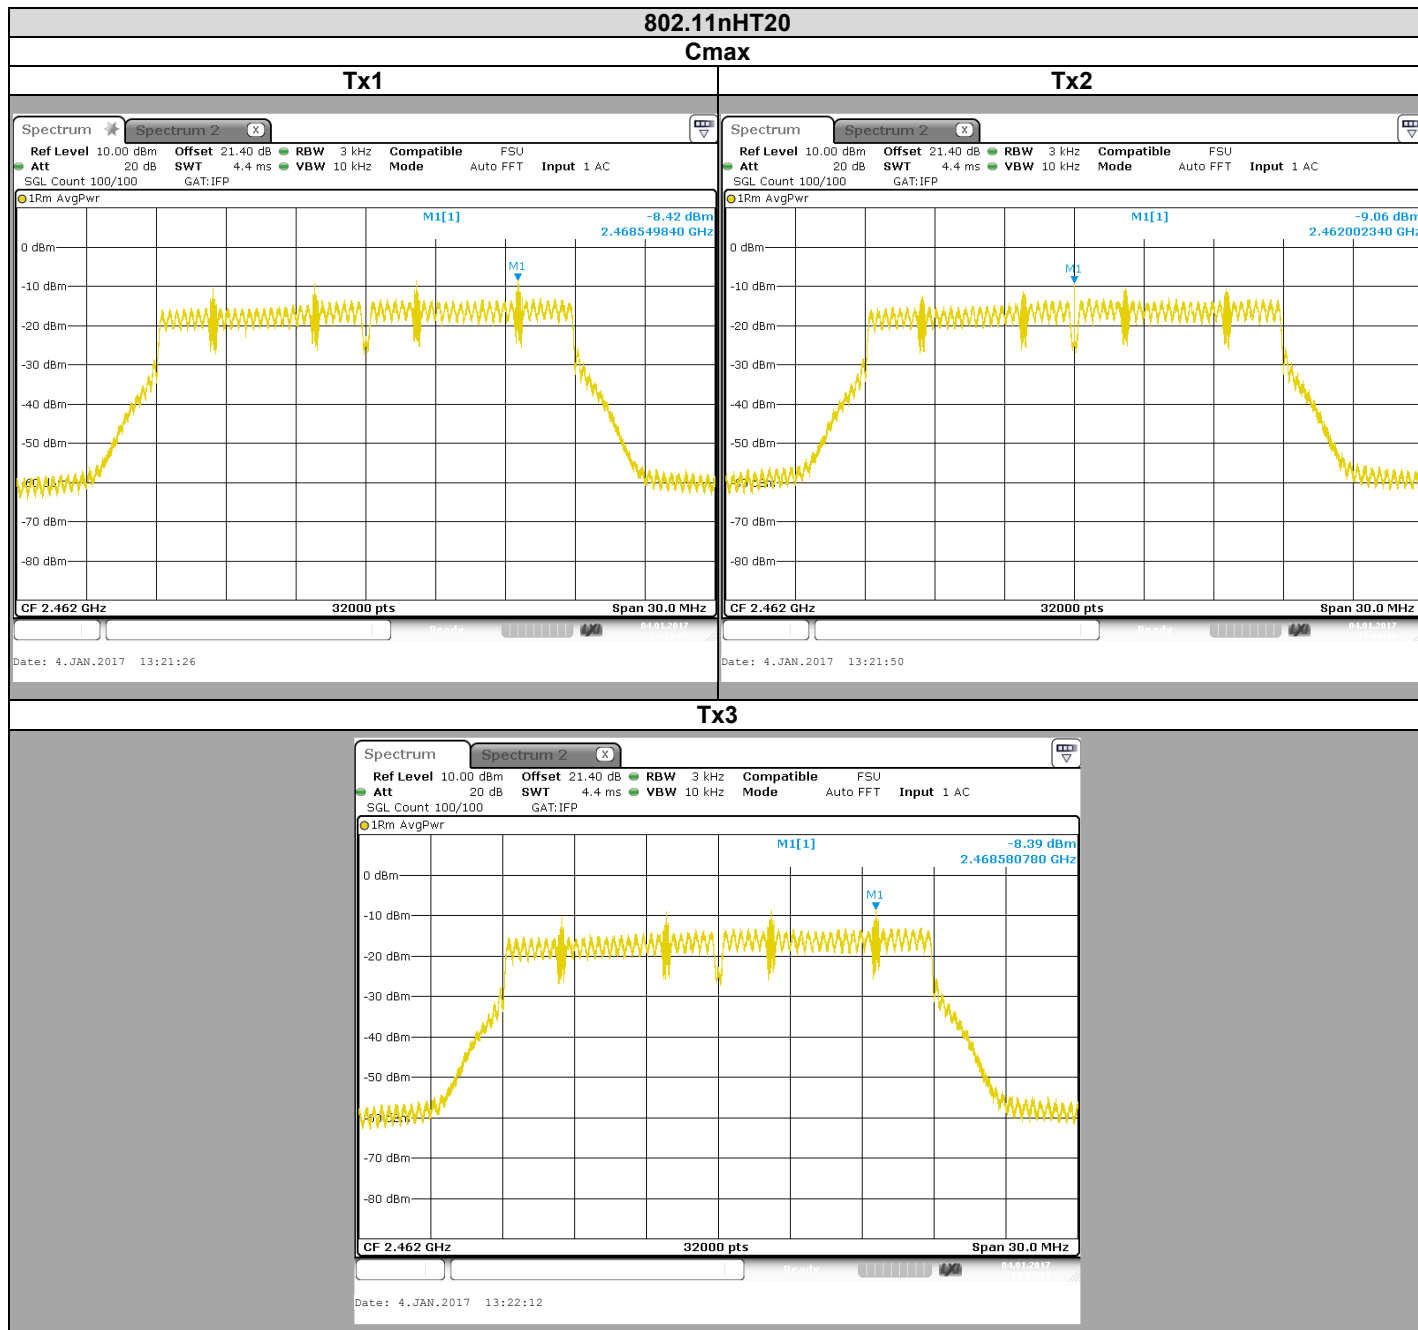

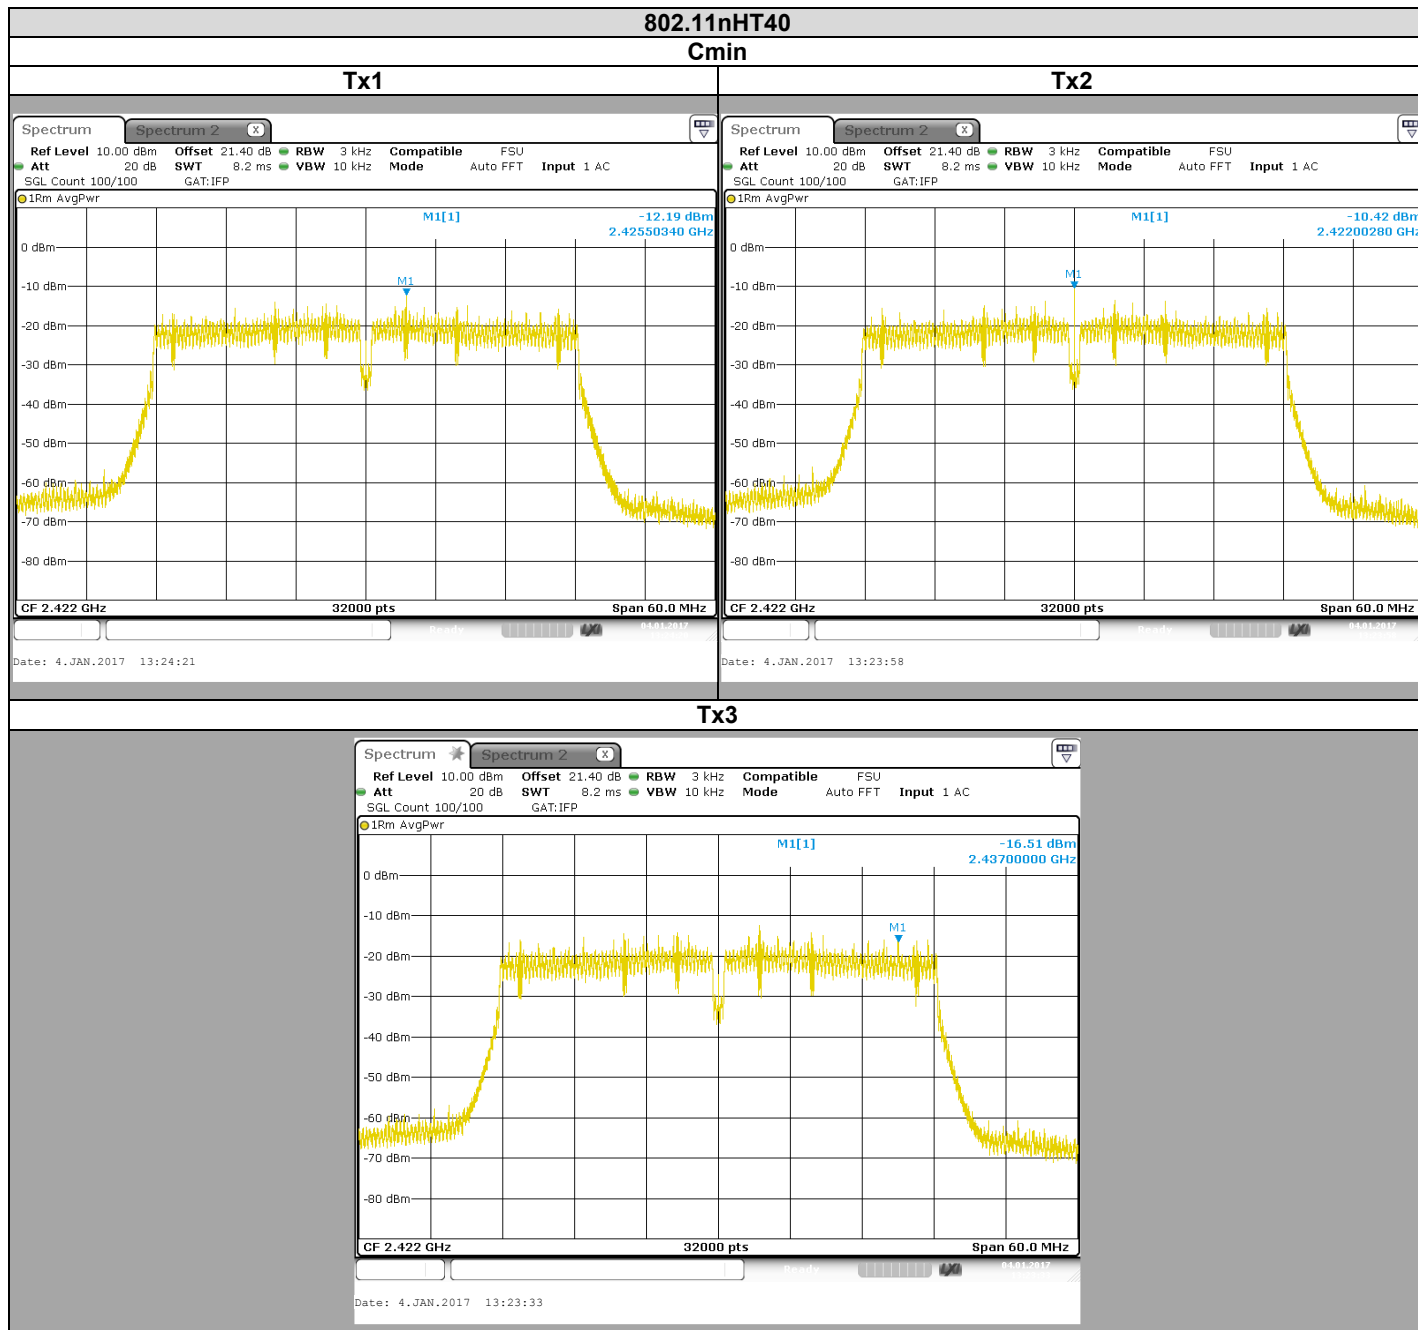

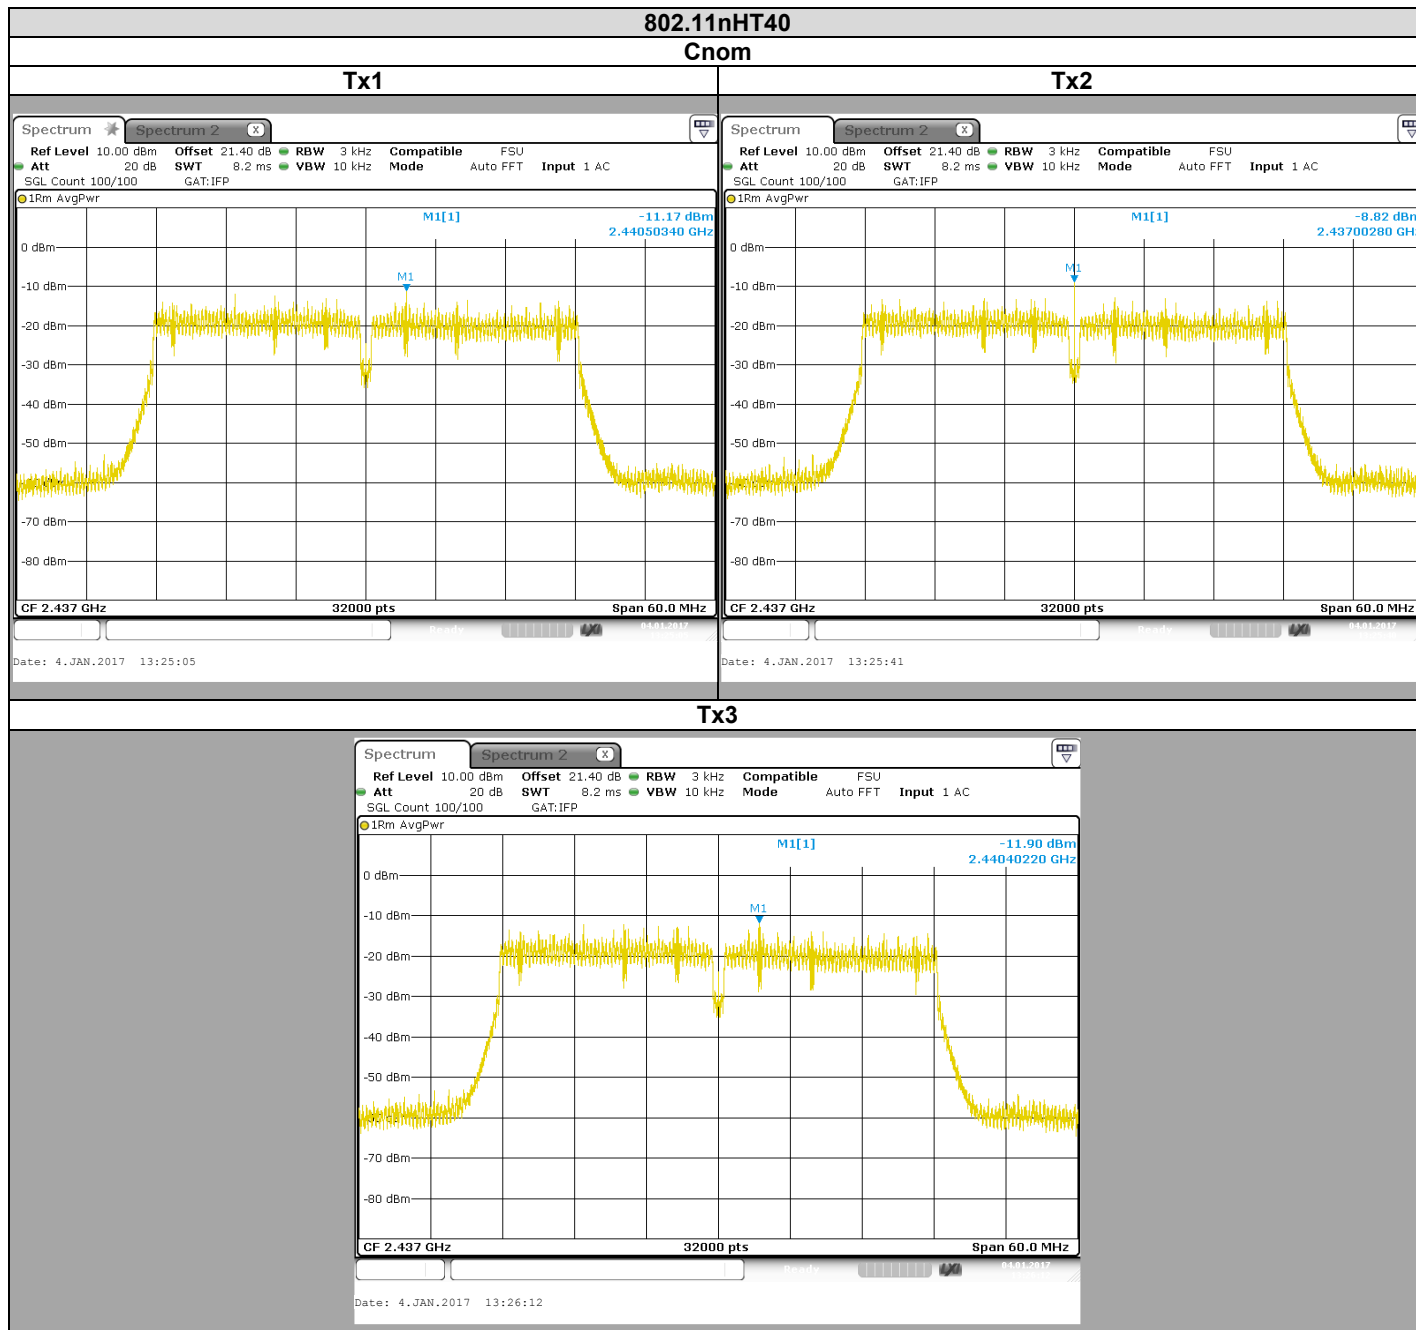

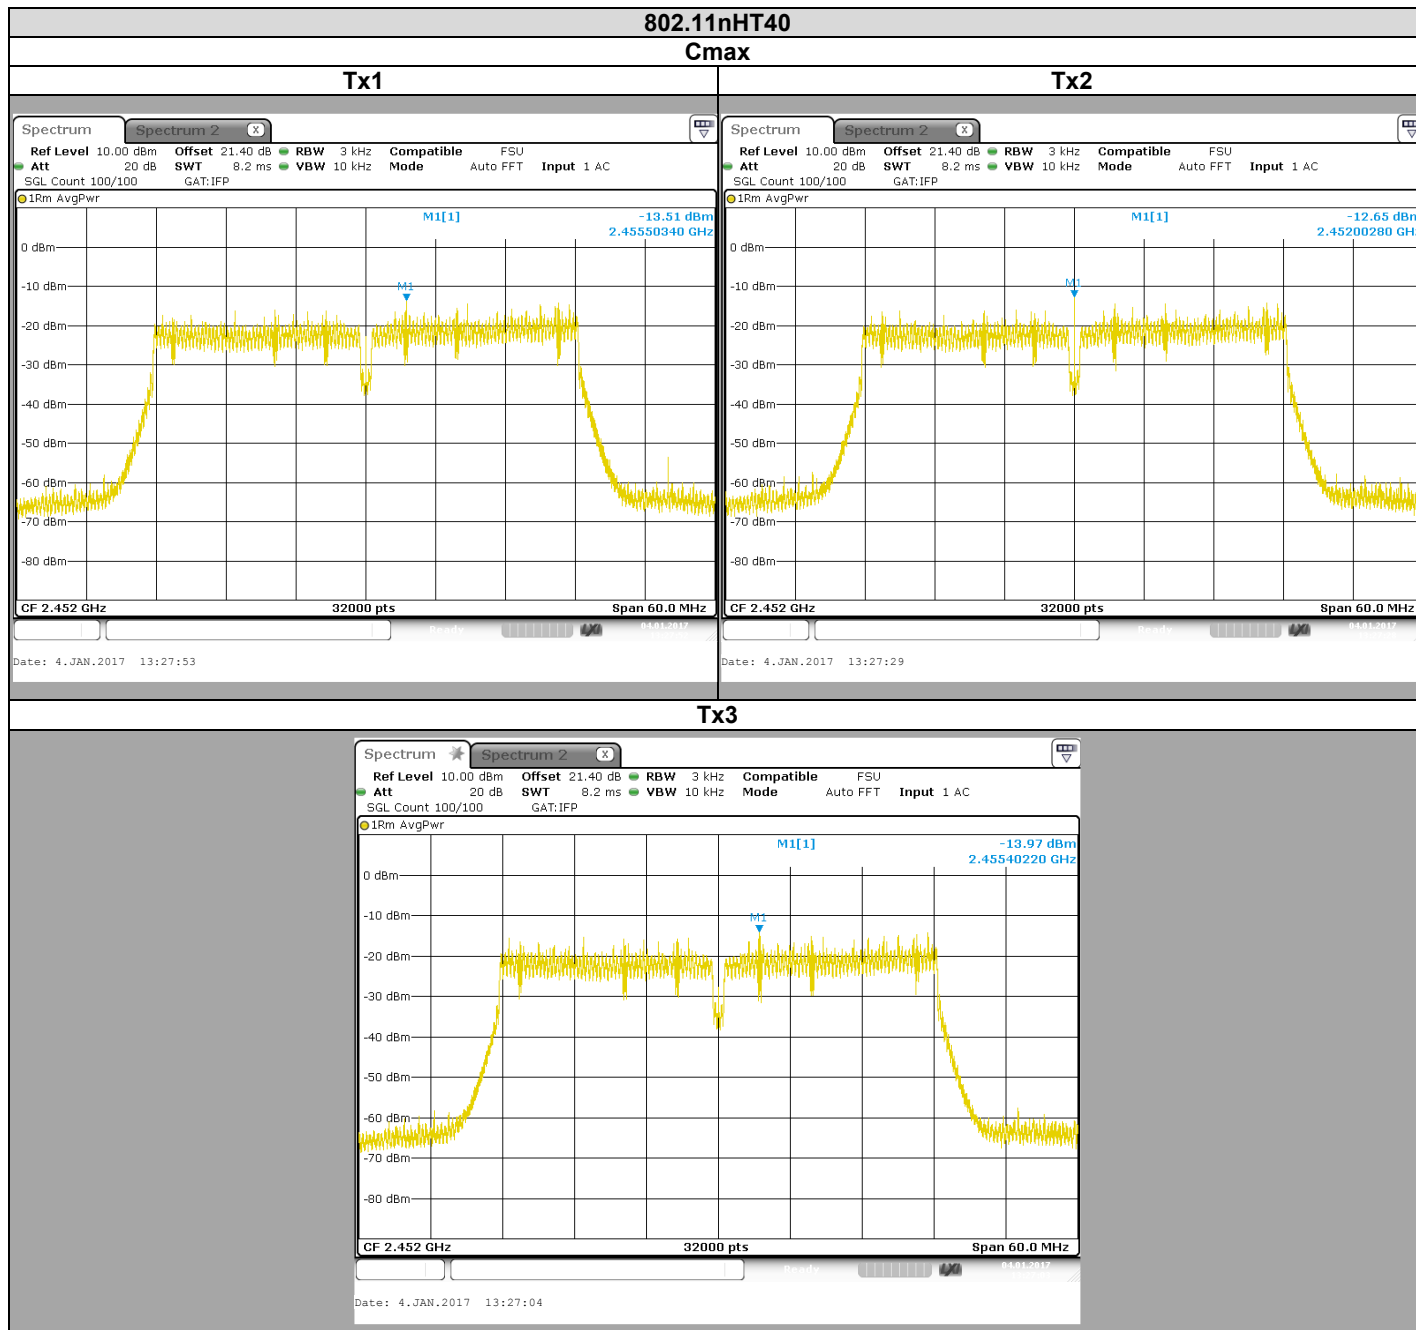

Spectrum Analyzer Offset:
Cable Loss : 1,4dB Attenuator : 20.0dB

802.11b							
Channel	Tx1 (dBm/3kHz)	Tx2 (dBm/3kHz)	Tx3 (dBm/3kHz)	Tx4 (dBm/3kHz)	Overall Antenna Gain (dBi)	Power Spectral Density (dBm)	Limit (dBm/3kHz)
Cmin	-1,6	-1,68	-1,97		5,00	3,02	8
Cnom	-0,87	-0,99	-1,1		5,00	3,79	8
Cmax	-0,73	-0,44	-0,89		5,00	4,09	8

802.11g							
Channel	Tx1 (dBm/3kHz)	Tx2 (dBm/3kHz)	Tx3 (dBm/3kHz)	Tx4 (dBm/3kHz)	Overall Antenna Gain (dBi)	Power Spectral Density (dBm)	Limit (dBm/3kHz)
Cmin	-5,47	-5,82	-5,39		5,00	-0,78	8
Cnom	-2,53	-2,58	-2,13		5,00	2,36	8
Cmax	-5,45	-5,86	-5,48		5,00	-0,82	8

802.11n HT20							
Channel	Tx1 (dBm/3kHz)	Tx2 (dBm/3kHz)	Tx3 (dBm/3kHz)	Tx4 (dBm/3kHz)	Overall Antenna Gain (dBi)	Power Spectral Density (dBm)	Limit (dBm/3kHz)
Cmin	-7,3	-5,4	-7,21		5,00	-1,77	8
Cnom	-4,88	-4,46	-4,8		5,00	0,06	8
Cmax	-8,42	-9,06	-8,39		5,00	-3,84	8

802.11n HT40							
Channel	Tx1 (dBm/3kHz)	Tx2 (dBm/3kHz)	Tx3 (dBm/3kHz)	Tx4 (dBm/3kHz)	Overall Antenna Gain (dBi)	Power Spectral Density (dBm)	Limit (dBm/3kHz)
Cmin	-12,19	-10,42	-16,51		5,00	-7,61	8
Cnom	-11,17	-8,82	-11,9		5,00	-5,65	8
Cmax	-13,51	-12,65	-13,97		5,00	-8,57	8

7.2. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **SAGEMCOM** MiniBox (253697290), SN: **616476080862**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.