

Measurement Results

No.1-4095/22-01-03_Annex_MR

Test logging

This document is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:



cn=Joerg Warken, o=CTC
advanced GmbH,
ou=WAK-211130,
email=joerg.warken@ctcadvanced
.com, c=DE
2022.05.31 12:11:12 +02'00'

Jörg Warken
Lab Manager
Radio Communications

Table of Content

EUT Information	3
Common 2G4 # Peak output power 3MHz/3MHz ~ BT Classic Basic rate	4
Common 2G4 # Peak output power 3MHz/3MHz ~ BT Classic EDR Pi/4DQPSK	8
Common 2G4 # Peak output power 3MHz/3MHz ~ BT Classic EDR 8DPSK	12
FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate	16
FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi/4DQPSK	20
FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK	24
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate	28
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi/4DQPSK	38
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK	48
FCC 15.247 # Carrier frequency separation FHSS ~ BT Classic Basic rate	58
FCC 15.247 # Number of hopping channels FHSS ~ BT Classic Basic rate	61
FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate	66
FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi/4DQPSK	73
FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK	80

EUT Information

EUT DEFINITION	
Manufacturer	Sagemcom
Type	DIW377 UHD ALT US
Serial Number	Sample #1
Setup Number	1.0
Version SW	NI
Version FW	NI
Version HW	NI
Comment 1	
Comment 2	
Temperature [°C] Min	20
Temperature [°C] Nom	20
Temperature [°C] Max	20
Voltage [V] Min	12
Voltage [V] Nom	12
Voltage [V] Max	12

Common 2G4 # Peak output power 3MHz/3MHz ~ BT Classic Basic rate

Test References	
TC Start	31.05.2022 09:35:29
Ambit Temp [°C] Humidity [rel%]	23.1 33
System Version	3.1.0.0
Test Specification	Common 2G4 - none
Test Method	
TC Version	0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz - BT Classic Basic Rate
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4QPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.64	dBm	INFO
Ref. Frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.64 10.09 20
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	1.89	dBm	INFO
Peak Power	---	---	1.545254	mW	INFO
Frequency at Peak	---	---	2401.935	MHz	INFO

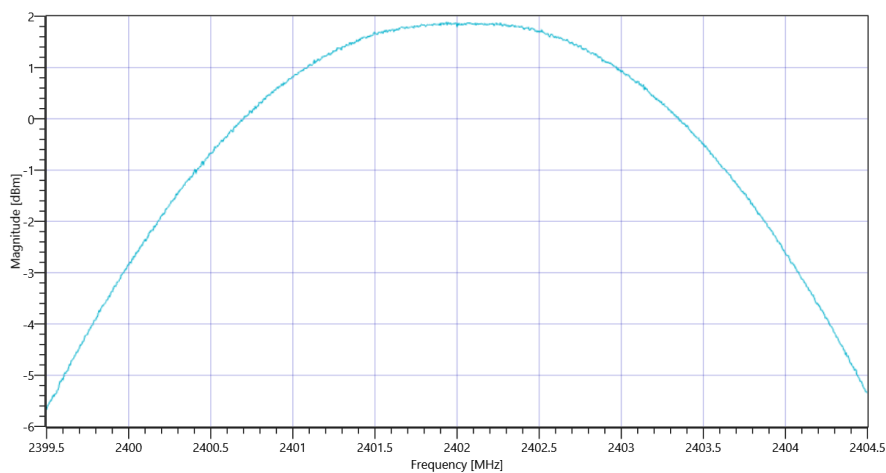

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic Basic rate

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.36	dBm	INFO
Ref. Frequency	---	---	2440.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.36 10.1 20
Start [MHz] Stop [MHz]	2438.500 2443.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	2.69	dBm	INFO
Peak Power	---	---	1.857804	mW	INFO
Frequency at Peak	---	---	2441.04	MHz	INFO

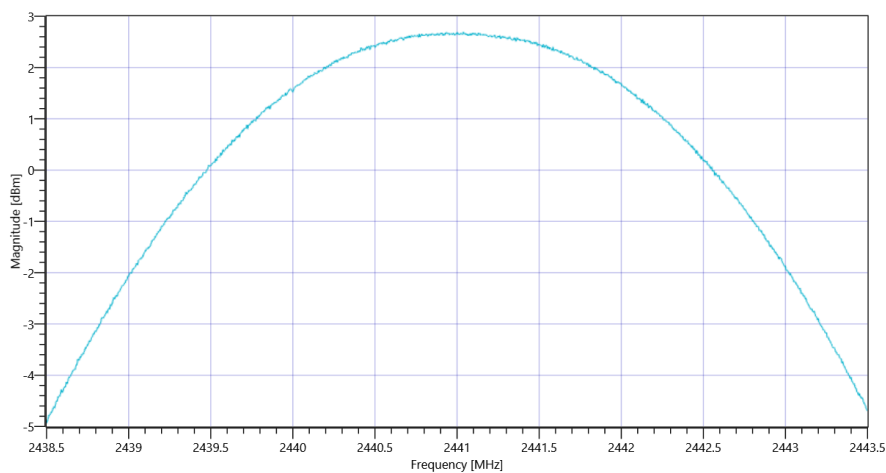

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic Basic rate

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.95	dBm	INFO
Ref. Frequency	---	---	2479.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.95 10.15 20
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	2.27	dBm	INFO
Peak Power	---	---	1.686553	mW	INFO
Frequency at Peak	---	---	2480.005	MHz	INFO

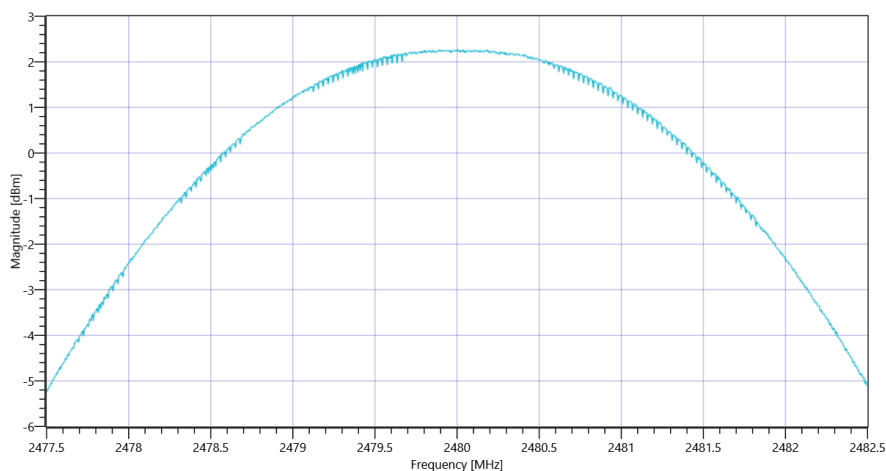

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic Basic rate

General verdict

no verdict

Common 2G4 # Peak output power 3MHz/3MHz ~ BT Classic EDR Pi/4DQPSK

Test References

TC Start	31.05.2022 10:07:04
Ambit Temp [°C] Humidity [rel%]	23.8 32
System Version	3.1.0.0
Test Specification	Common 2G4 - none
Test Method	
TC Version	0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz - BT Classic EDR Pi/4DQPSK
Add. Information	

EUT Common Settings BT Classic

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT Classic EDR Pi/4DQPSK
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.16	dBm	INFO
Ref. Frequency	---	---	2401.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.16 10.09 20
Start [MHz] Stop [MHz]	2398.750 2405.250
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	3.3	dBm	INFO
Peak Power	---	---	2.137962	mW	INFO
Frequency at Peak	---	---	2402.11	MHz	INFO

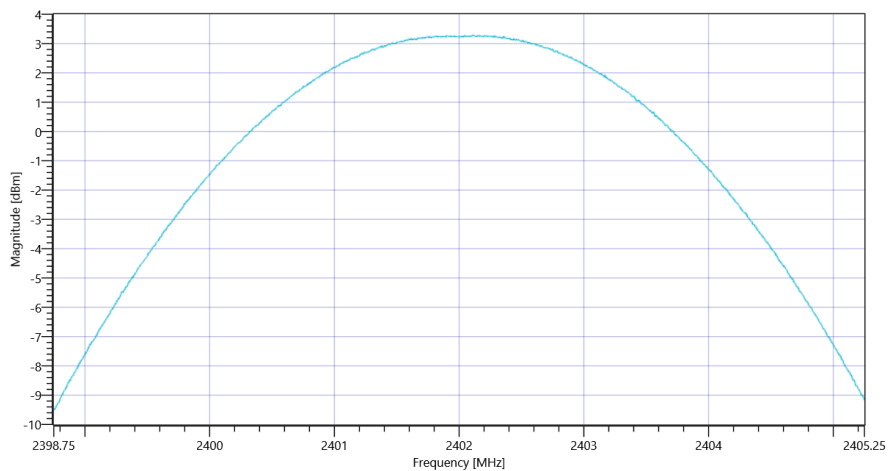

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic EDR Pi-4DQPSK

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.49	dBm	INFO
Ref. Frequency	---	---	2440.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.49 10.1 20
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	3.47	dBm	INFO
Peak Power	---	---	2.22331	mW	INFO
Frequency at Peak	---	---	2441.071	MHz	INFO

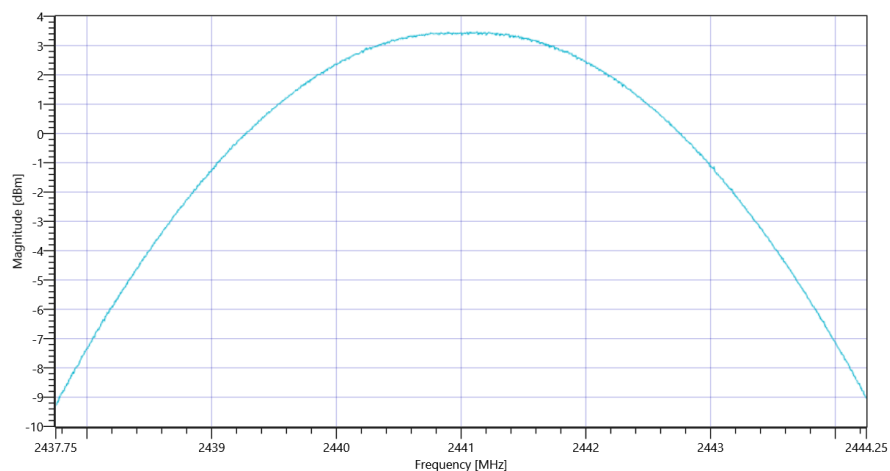

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic EDR Pi-4DQPSK

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.71	dBm	INFO
Ref. Frequency	---	---	2479.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.71 10.15 20
Start [MHz] Stop [MHz]	2476.750 2483.250
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	2.65	dBm	INFO
Peak Power	---	---	1.840772	mW	INFO
Frequency at Peak	---	---	2480.136	MHz	INFO

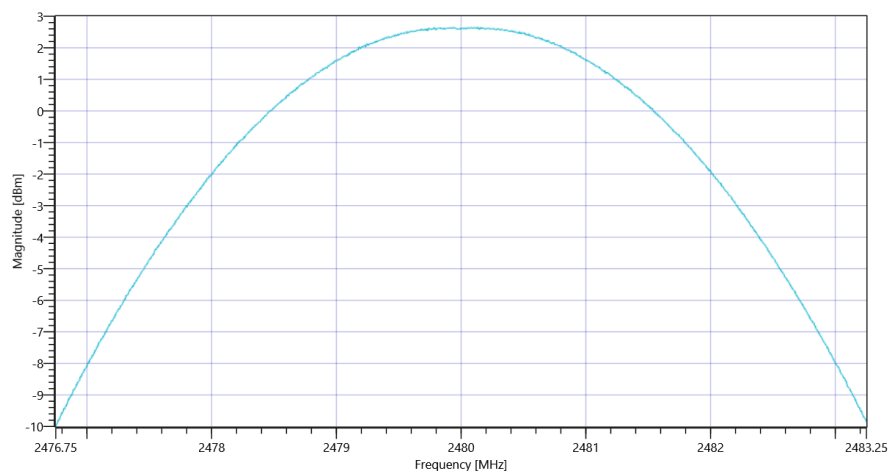

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic EDR Pi-4DQPSK

General verdict

no verdict

Common 2G4 # Peak output power 3MHz/3MHz ~ BT Classic EDR 8DPSK

Test References	
TC Start	31.05.2022 10:34:31
Ambit Temp [°C] Humidity [rel%]	24.0 32
System Version	3.1.0.0
Test Specification	Common 2G4 - none
Test Method	
TC Version	0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz - BT Classic EDR 8DPSK
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic EDR 8DPSK
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.42	dBm	INFO
Ref. Frequency	---	---	2401.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.42 10.09 20
Start [MHz] Stop [MHz]	2398.750 2405.250
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	3.76	dBm	INFO
Peak Power	---	---	2.37684	mW	INFO
Frequency at Peak	---	---	2401.994	MHz	INFO

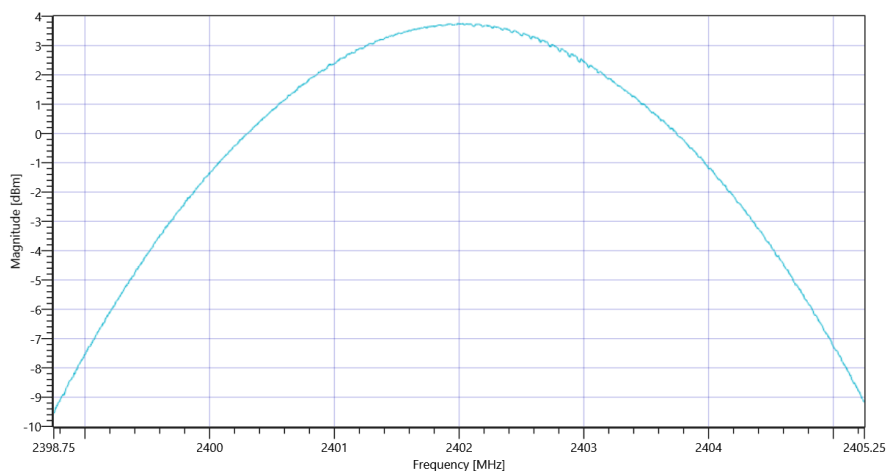

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic EDR 8DPSK

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.31	dBm	INFO
Ref. Frequency	---	---	2440.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.31 10.1 20
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	3.95	dBm	INFO
Peak Power	---	---	2.483133	mW	INFO
Frequency at Peak	---	---	2440.987	MHz	INFO

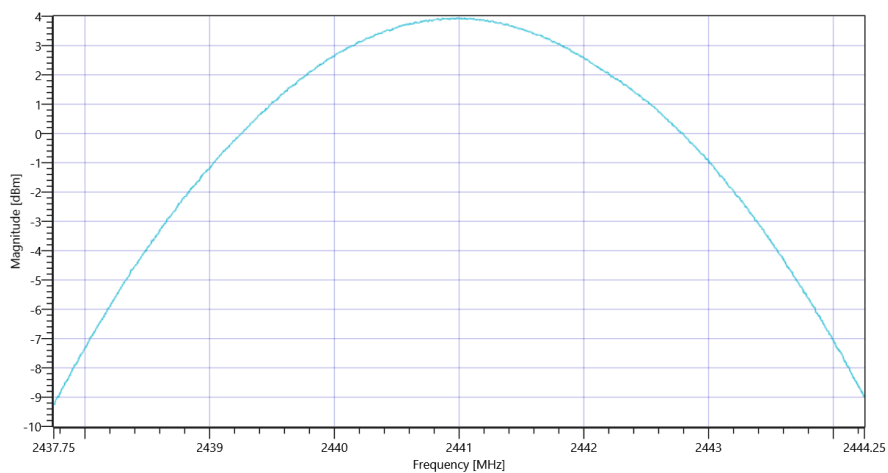

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic EDR 8DPSK

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.64	dBm	INFO
Ref. Frequency	---	---	2479.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.64 10.15 20
Start [MHz] Stop [MHz]	2476.750 2483.250
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	3.18	dBm	INFO
Peak Power	---	---	2.079697	mW	INFO
Frequency at Peak	---	---	2480.078	MHz	INFO

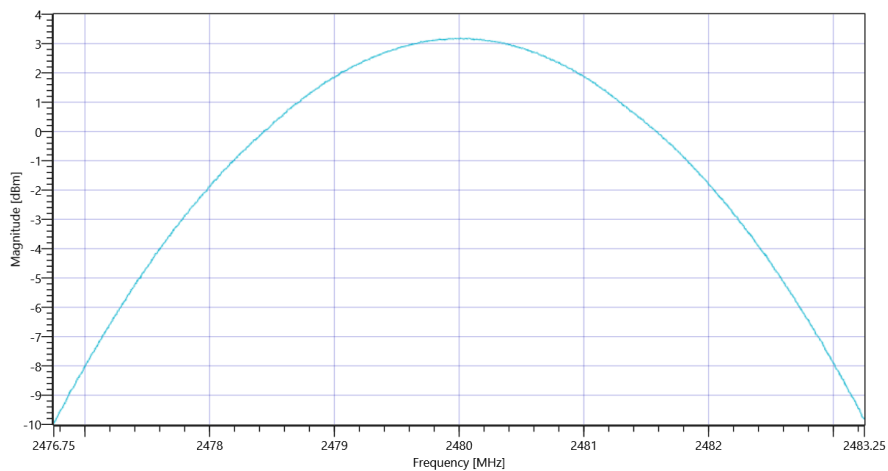

Common 2G4 # Peak output power 3MHz-3MHz ~ BT Classic EDR 8DPSK

General verdict

no verdict

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate

Test References	
TC Start	31.05.2022 09:37:08
Ambit Temp [°C] Humidity [rel%]	23.2 33
System Version	3.1.0.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic Basic Rate
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.67	dBm	INFO
Ref. Frequency	---	---	2402.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.67 10.09 20
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	1.93	dBm	PASS
Peak Power	---	1000	1.559553	mW	PASS
Frequency at Peak	---	---	2402.215	MHz	INFO

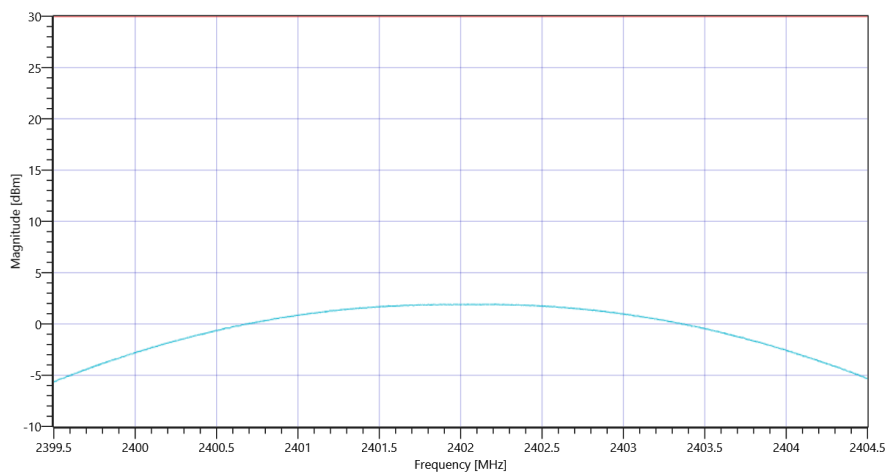

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.36	dBm	INFO
Ref. Frequency	---	---	2440.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.36 10.1 20
Start [MHz] Stop [MHz]	2438.500 2443.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	2.72	dBm	PASS
Peak Power	---	1000	1.870682	mW	PASS
Frequency at Peak	---	---	2440.925	MHz	INFO

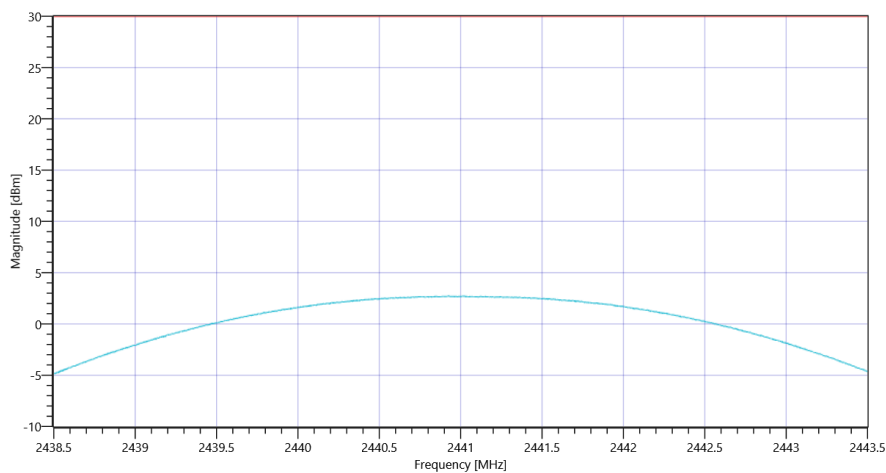

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.01	dBm	INFO
Ref. Frequency	---	---	2479.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.01 10.15 20
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	2.25	dBm	PASS
Peak Power	---	1000	1.678804	mW	PASS
Frequency at Peak	---	---	2480.02	MHz	INFO

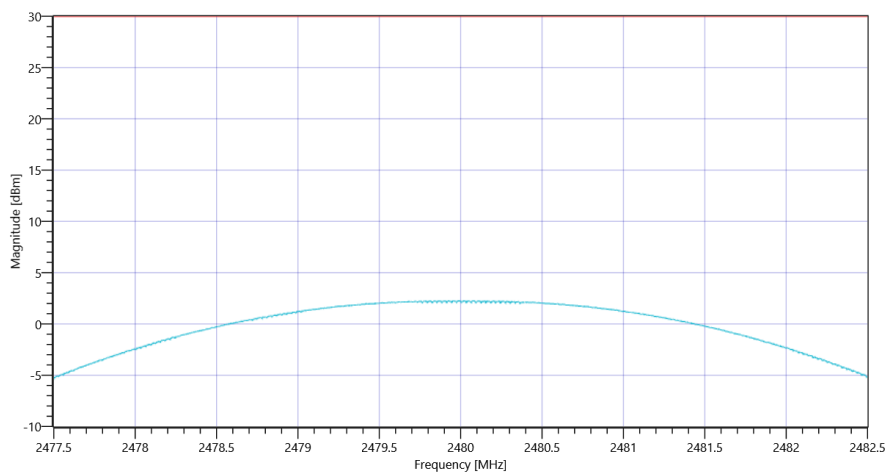

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate

General verdict

no verdict

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi/4DQPSK

Test References

TC Start	31.05.2022 10:08:43
Ambit Temp [°C] Humidity [rel%]	23.8 32
System Version	3.1.0.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic EDR Pi/4DQPSK
Add. Information	

EUT Common Settings BT Classic

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT Classic EDR Pi/4DQPSK
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.17	dBm	INFO
Ref. Frequency	---	---	2402.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.17 10.09 20
Start [MHz] Stop [MHz]	2398.750 2405.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	3.27	dBm	PASS
Peak Power	---	1000	2.123244	mW	PASS
Frequency at Peak	---	---	2401.994	MHz	INFO

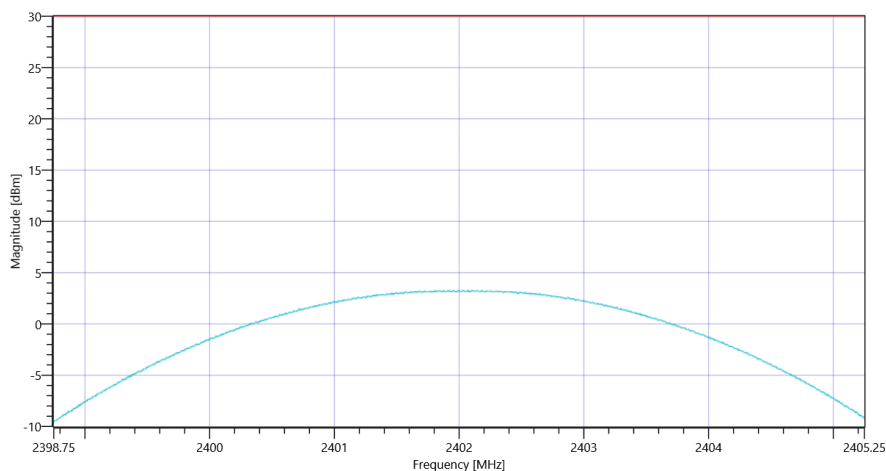

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi-4QPSK

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.17	dBm	INFO
Ref. Frequency	---	---	2440.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.17 10.1 20
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	3.48	dBm	PASS
Peak Power	---	1000	2.228435	mW	PASS
Frequency at Peak	---	---	2441.13	MHz	INFO

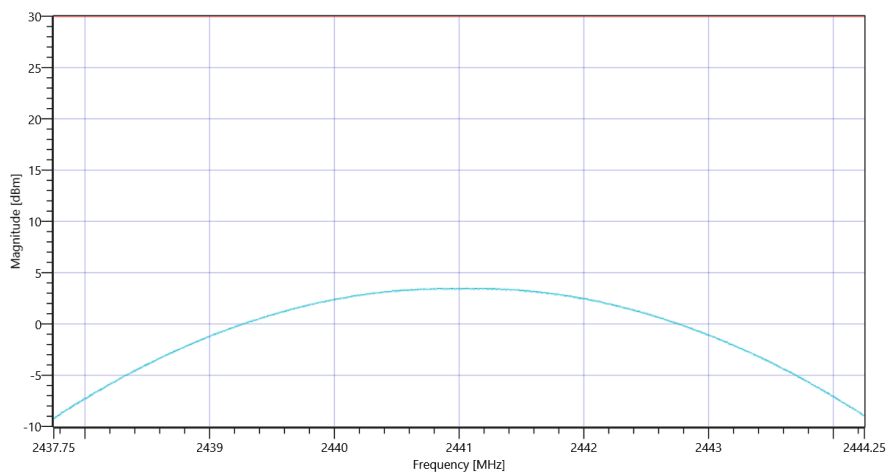

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi-4DQPSK

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.71	dBm	INFO
Ref. Frequency	---	---	2479.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.71 10.15 20
Start [MHz] Stop [MHz]	2476.750 2483.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	2.66	dBm	PASS
Peak Power	---	1000	1.845015	mW	PASS
Frequency at Peak	---	---	2479.935	MHz	INFO

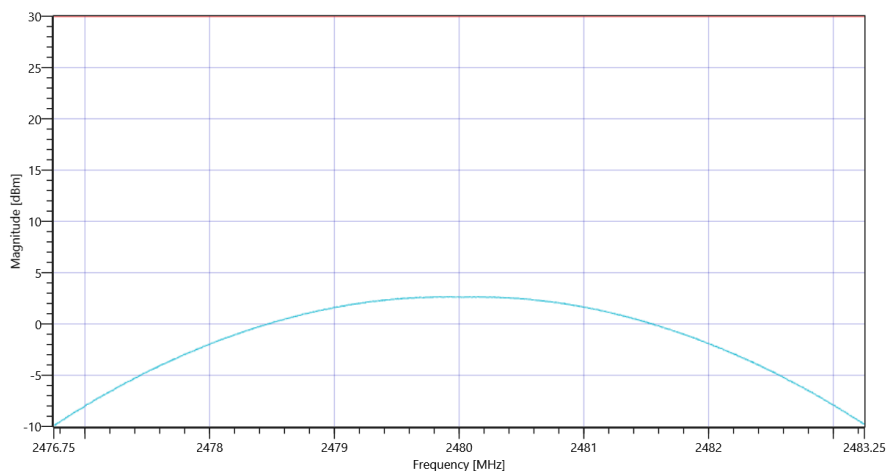

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi-4DQPSK

General verdict

no verdict

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK

Test References

TC Start	31.05.2022 10:36:10
Ambit Temp [°C] Humidity [rel%]	24.1 32
System Version	3.1.0.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic EDR 8DPSK
Add. Information	

EUT Common Settings BT Classic

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT Classic EDR 8DPSK
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.98	dBm	INFO
Ref. Frequency	---	---	2401.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.98 10.09 20
Start [MHz] Stop [MHz]	2398.750 2405.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	3.69	dBm	PASS
Peak Power	---	1000	2.338837	mW	PASS
Frequency at Peak	---	---	2401.968	MHz	INFO

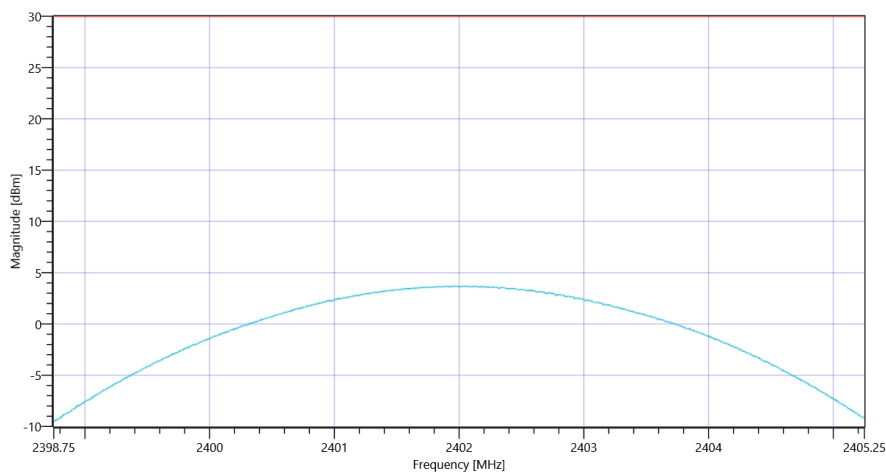

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.06	dBm	INFO
Ref. Frequency	---	---	2441.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.06 10.1 20
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	3.9	dBm	PASS
Peak Power	---	1000	2.454709	mW	PASS
Frequency at Peak	---	---	2440.974	MHz	INFO

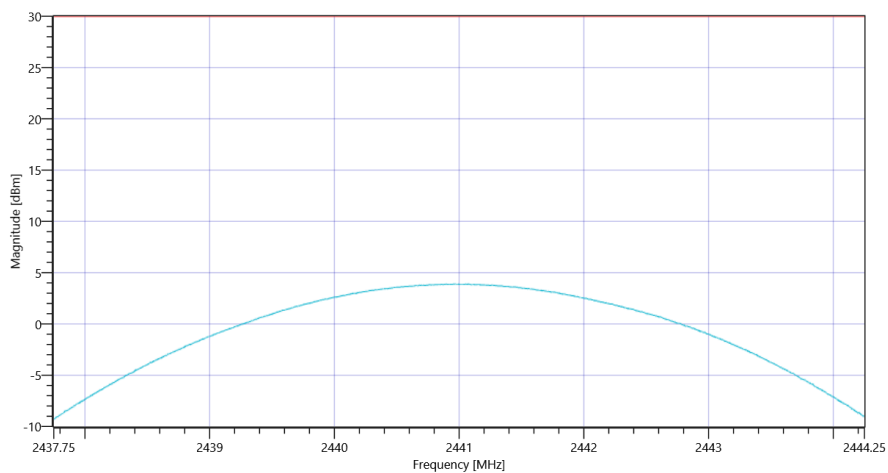

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.99	dBm	INFO
Ref. Frequency	---	---	2480.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.99 10.15 20
Start [MHz] Stop [MHz]	2476.750 2483.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	3.15	dBm	PASS
Peak Power	---	1000	2.06538	mW	PASS
Frequency at Peak	---	---	2480.084	MHz	INFO

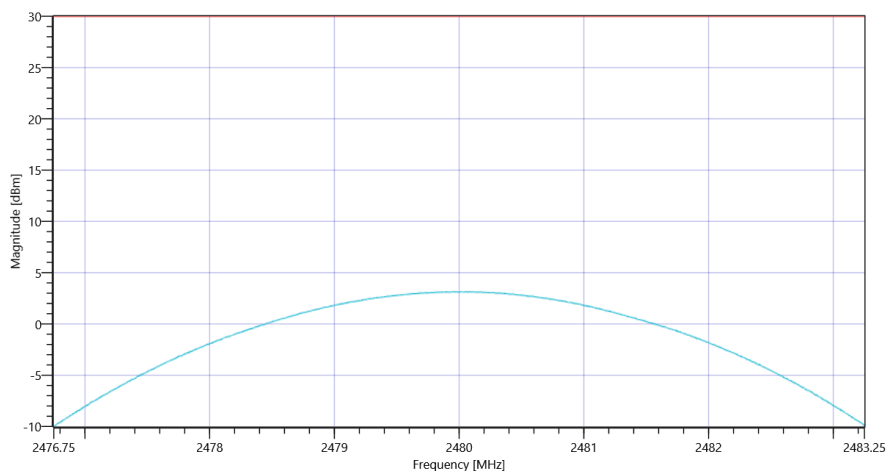

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK

General verdict

no verdict

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate

Test References	
TC Start	31.05.2022 09:41:48
Ambit Temp [°C] Humidity [rel%]	23.2 33
System Version	3.1.0.0
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT - 20dB FHSS - BT Classic Basic Rate
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2402 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.62	dBm	INFO
Ref. Frequency	---	---	2402.200	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.62 10.09 15
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	870.513	kHz	INFO
T1 99%	2400.000000	---	2401.5904	MHz	PASS
T2 99%	---	2483.500000	2402.4610	MHz	PASS

Plot: Bandwidth only

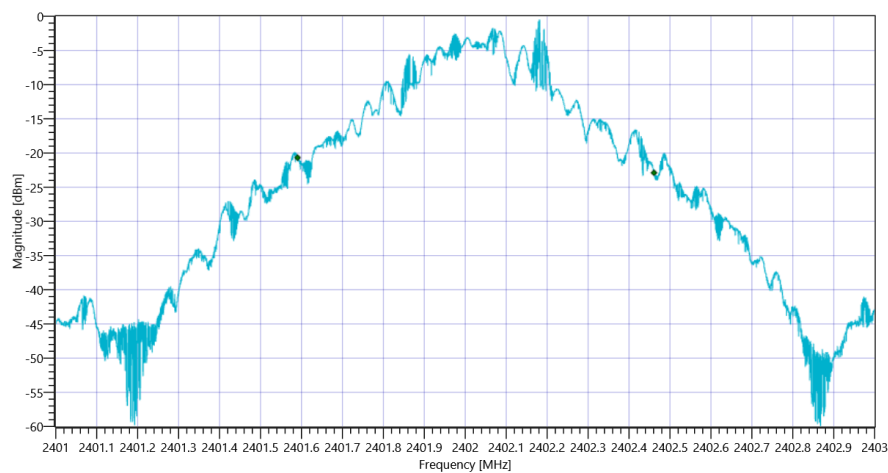

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate 99PCT


Plot: Bandwidth within Band

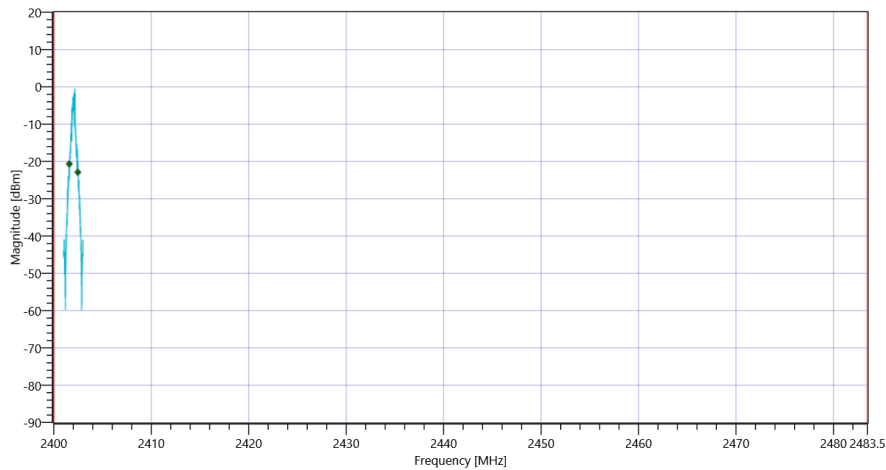

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	912	kHz	INFO
T1 20dB	2400.000000	---	2401.5776	MHz	PASS
T2 20dB	---	2483.500000	2402.4894	MHz	PASS

Plot: Bandwidth only

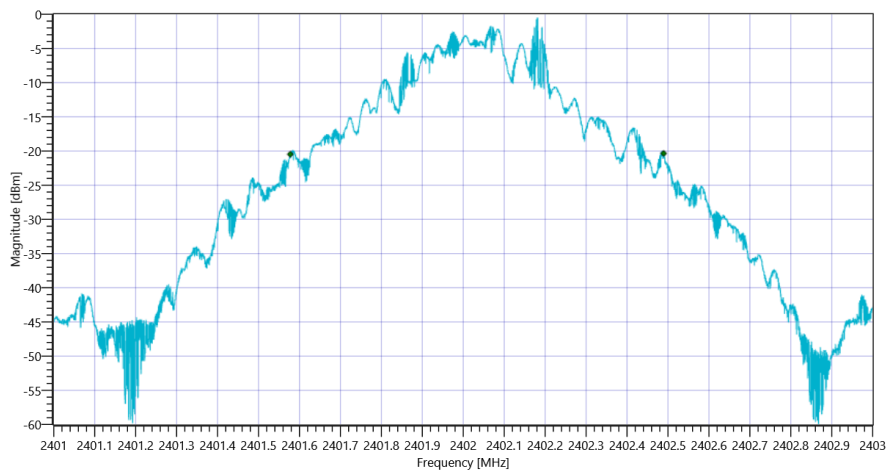

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate 20dB

Plot: Bandwidth within Band

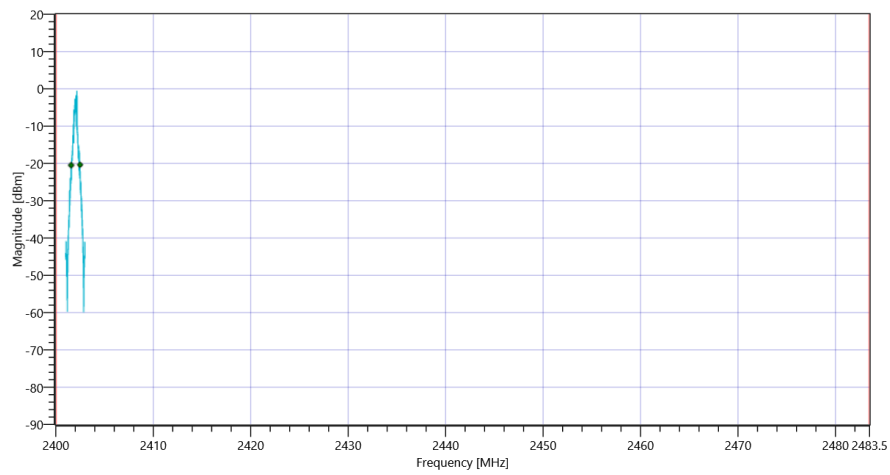

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate

Test at TX 2441 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.35	dBm	INFO
Ref. Frequency	---	---	2441.000	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.35 10.1 15
Start [MHz] Stop [MHz]	2440.000 2442.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	867.513	kHz	INFO
T1 99%	2400.000000	---	2440.5848	MHz	PASS
T2 99%	---	2483.500000	2441.4524	MHz	PASS

Plot: Bandwidth only

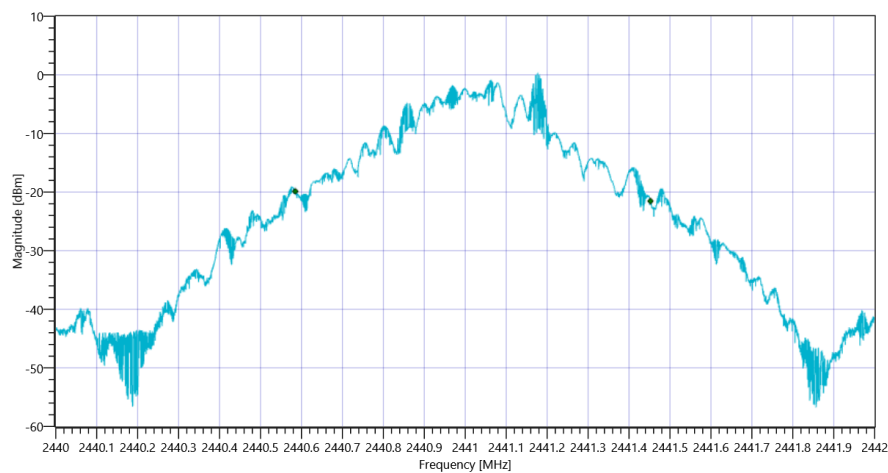

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate 99PCT


Plot: Bandwidth within Band

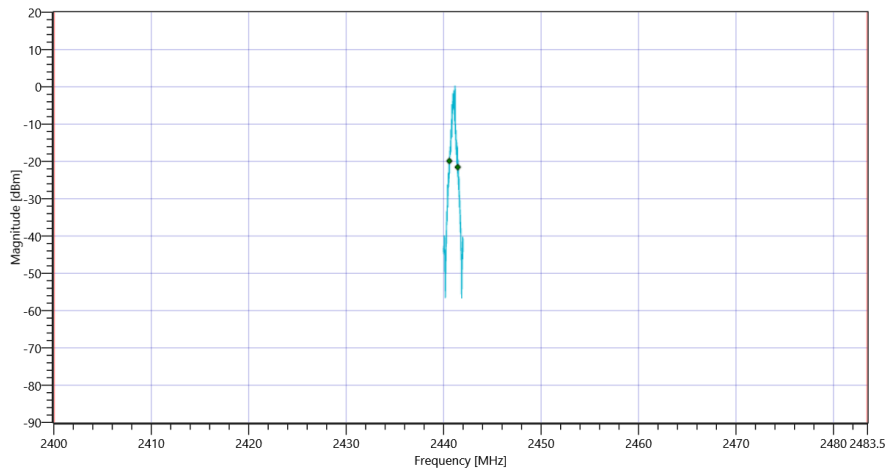

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	913	kHz	INFO
T1 20dB	2400.000000	---	2440.5704	MHz	PASS
T2 20dB	---	2483.500000	2441.4834	MHz	PASS

Plot: Bandwidth only

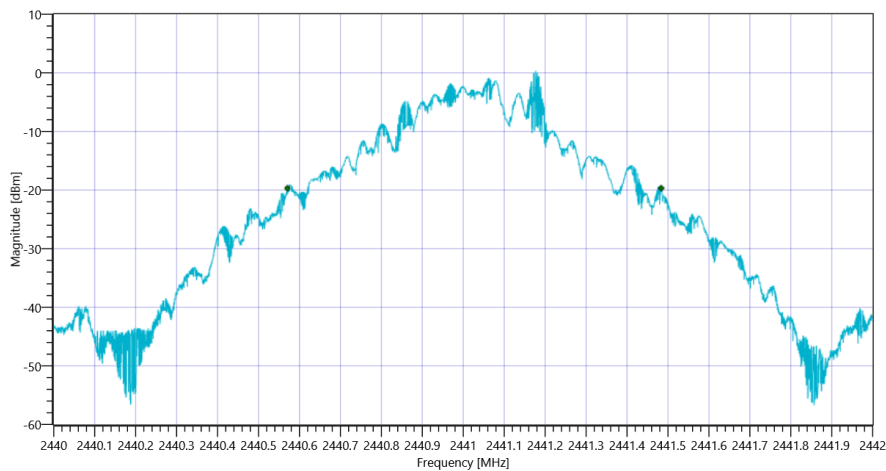

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate 20dB

Plot: Bandwidth within Band

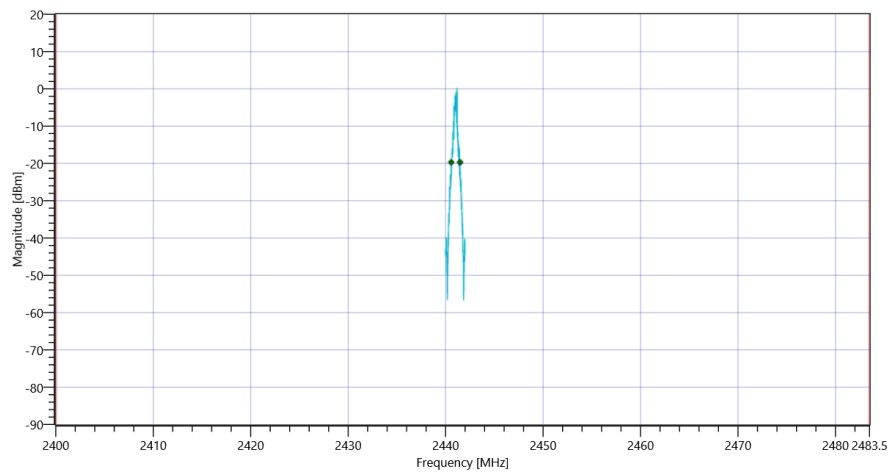

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate

Test at TX 2480 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.98	dBm	INFO
Ref. Frequency	---	---	2479.900	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.98 10.15 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	865.913	kHz	INFO
T1 99%	2400.000000	---	2479.5778	MHz	PASS
T2 99%	---	2483.500000	2480.4438	MHz	PASS

Plot: Bandwidth only

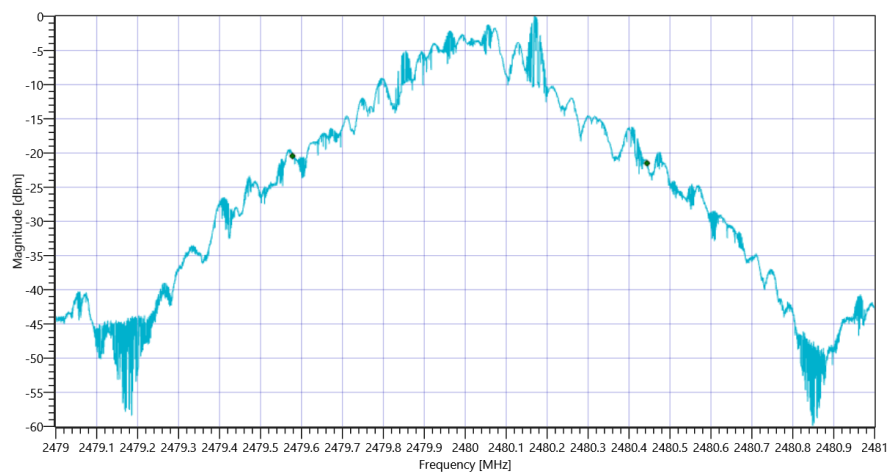

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate 99PCT


Plot: Bandwidth within Band

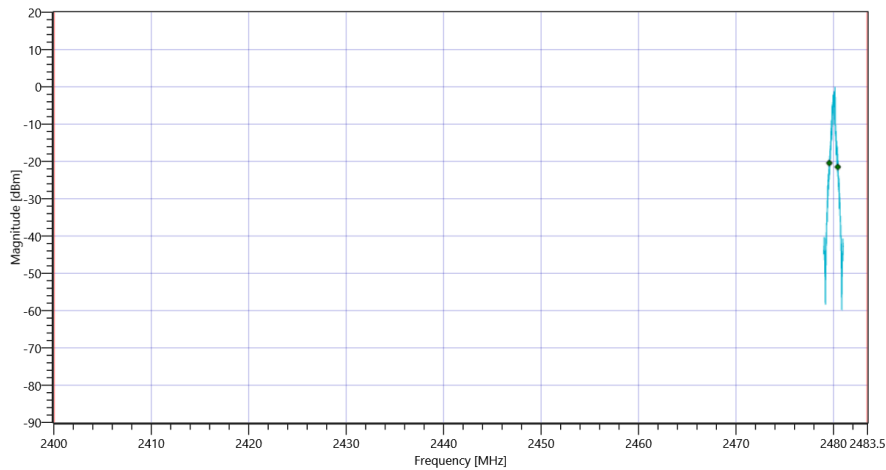

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	912	kHz	INFO
T1 20dB	2400.000000	---	2479.5648	MHz	PASS
T2 20dB	---	2483.500000	2480.4766	MHz	PASS

Plot: Bandwidth only

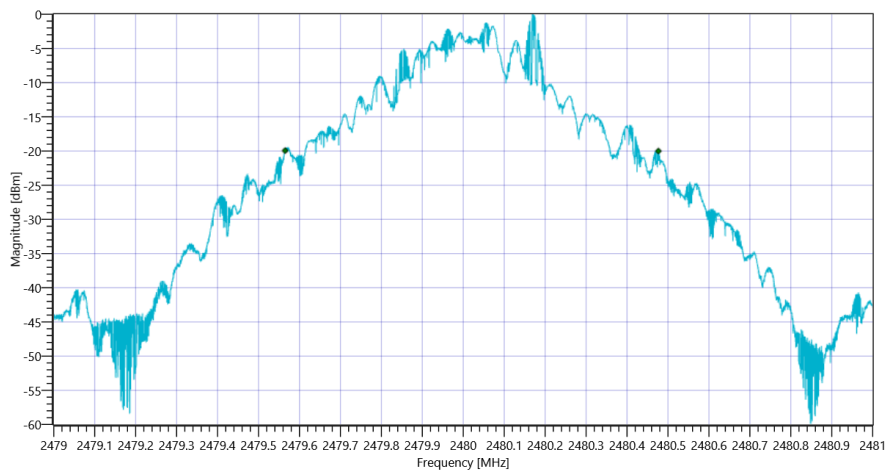

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate 20dB

Plot: Bandwidth within Band

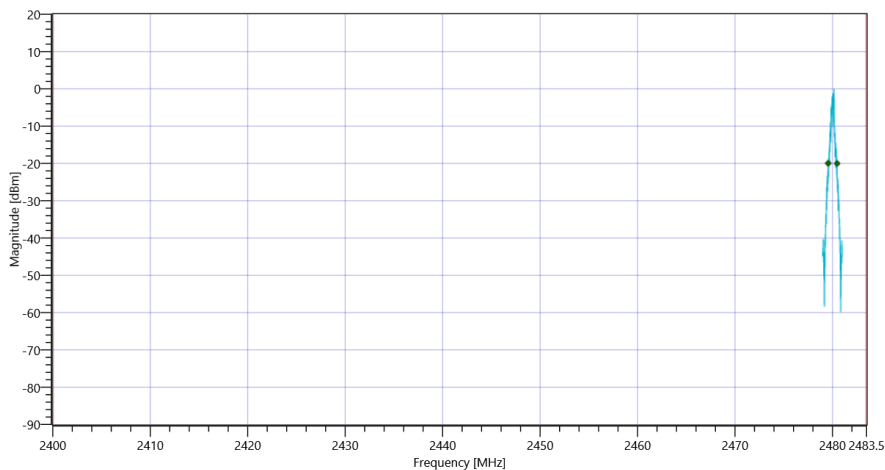

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate

General verdict

no verdict

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi/4DQPSK

Test References

TC Start	31.05.2022 11:18:54
Ambit Temp [°C] Humidity [rel%]	24.5 31
System Version	3.1.0.0
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT - 20dB FHSS - BT Classic EDR Pi/4DQPSK
Add. Information	

EUT Common Settings BT Classic

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT Classic EDR Pi/4DQPSK
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2402 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.97	dBm	INFO
Ref. Frequency	---	---	2401.800	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.97 10.09 15
Start [MHz] Stop [MHz]	2400.700 2403.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1199.260	kHz	INFO
T1 99%	2400.000000	---	2401.4273	MHz	PASS
T2 99%	---	2483.500000	2402.6265	MHz	PASS

Plot: Bandwidth only

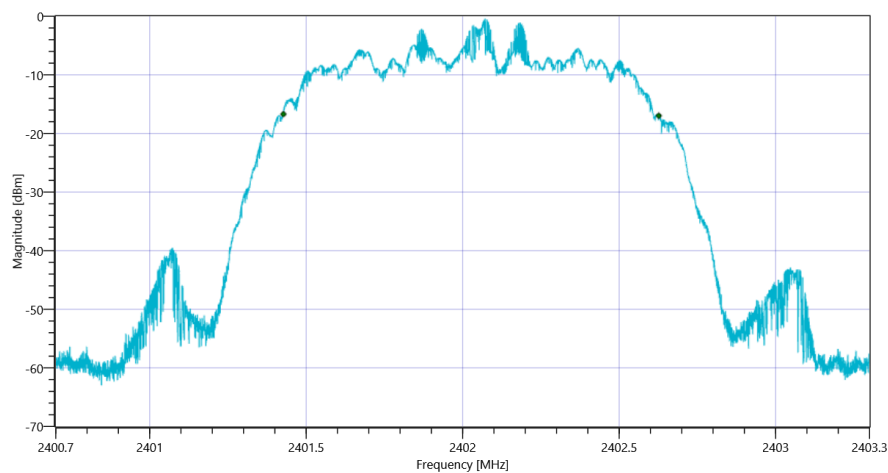


Plot: Bandwidth within Band

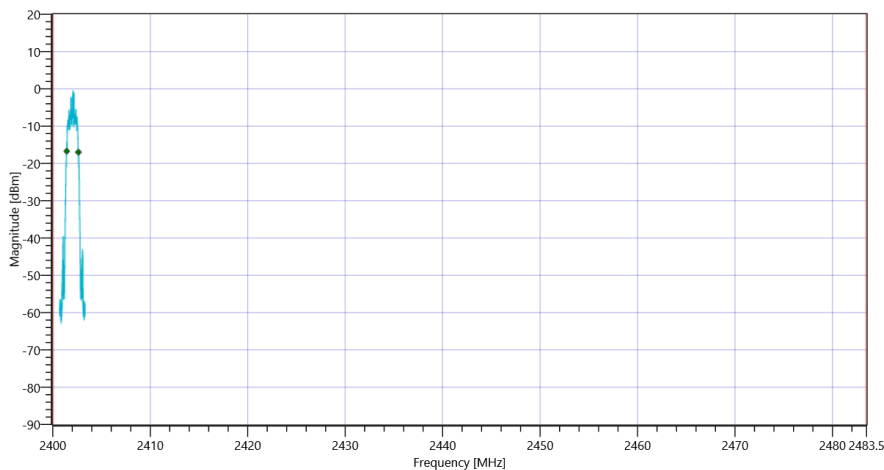

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4DQPSK


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1328	kHz	INFO
T1 20dB	2400.000000	---	2401.3607	MHz	PASS
T2 20dB	---	2483.500000	2402.6885	MHz	PASS

Plot: Bandwidth only

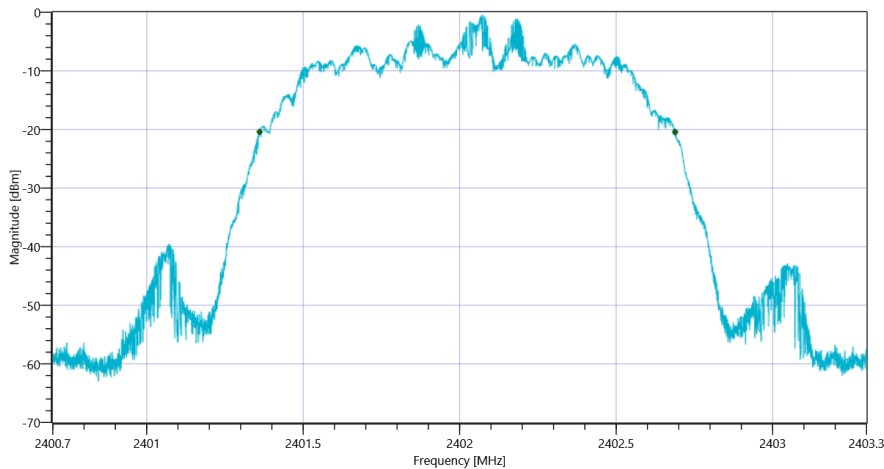

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4DQPSK 20dB

Plot: Bandwidth within Band

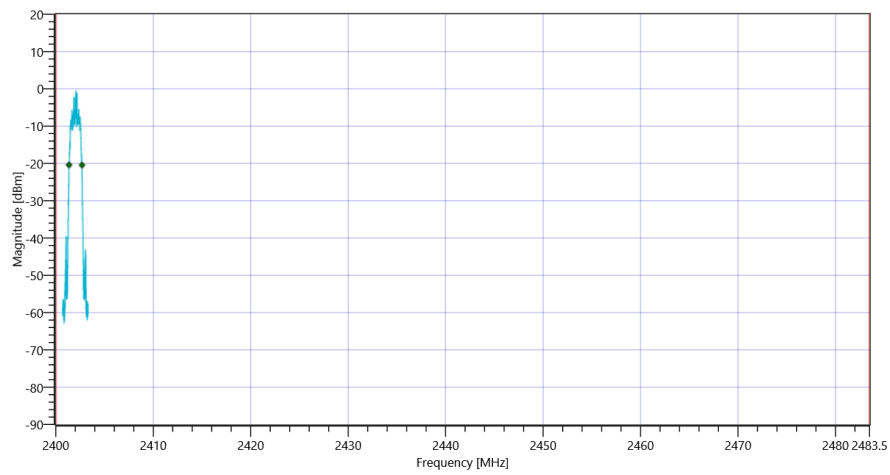

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4QPSK

Test at TX 2441 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.97	dBm	INFO
Ref. Frequency	---	---	2440.900	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.97 10.1 15
Start [MHz] Stop [MHz]	2439.700 2442.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1198.220	kHz	INFO
T1 99%	2400.000000	---	2440.4210	MHz	PASS
T2 99%	---	2483.500000	2441.6193	MHz	PASS

Plot: Bandwidth only

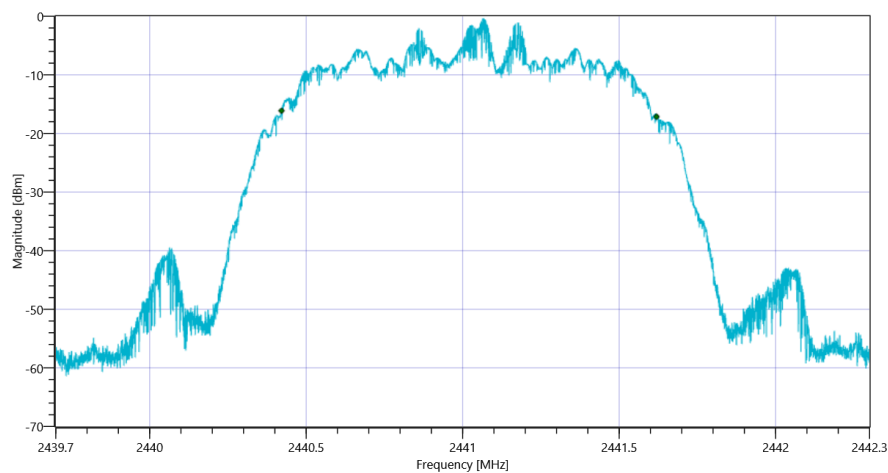

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4DQPSK 99PCT


Plot: Bandwidth within Band

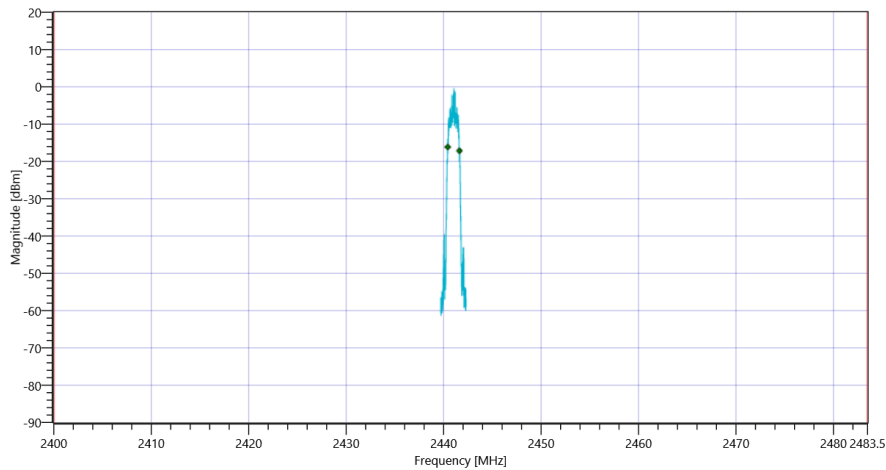

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4DQPSK


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1327	kHz	INFO
T1 20dB	2400.000000	---	2440.3547	MHz	PASS
T2 20dB	---	2483.500000	2441.6812	MHz	PASS

Plot: Bandwidth only

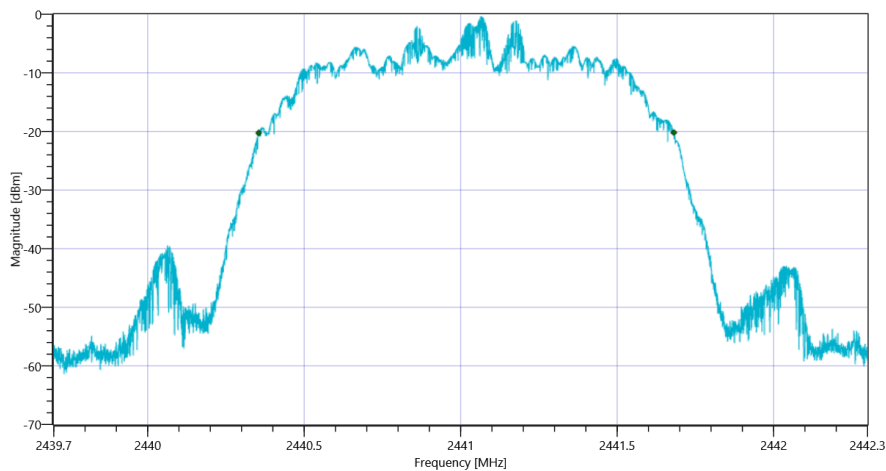

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4DQPSK 20dB

Plot: Bandwidth within Band

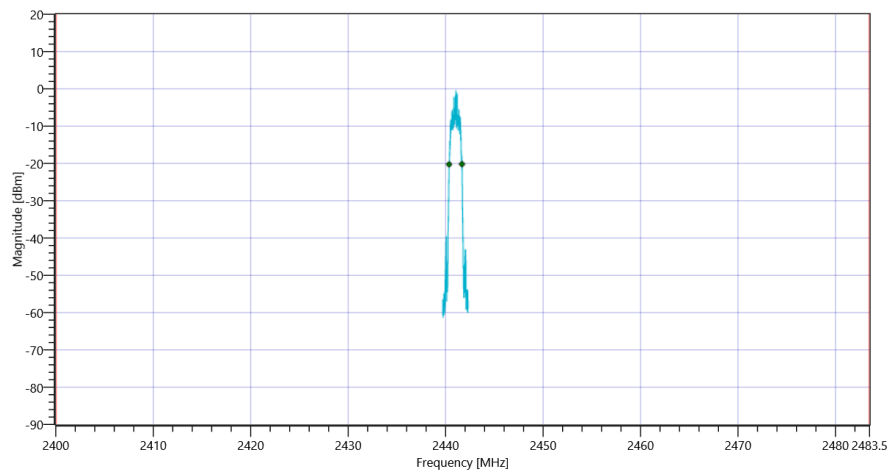

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4QPSK

Test at TX 2480 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.23	dBm	INFO
Ref. Frequency	---	---	2479.800	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.23 10.15 15
Start [MHz] Stop [MHz]	2478.700 2481.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1199.000	kHz	INFO
T1 99%	2400.000000	---	2479.4143	MHz	PASS
T2 99%	---	2483.500000	2480.6133	MHz	PASS

Plot: Bandwidth only

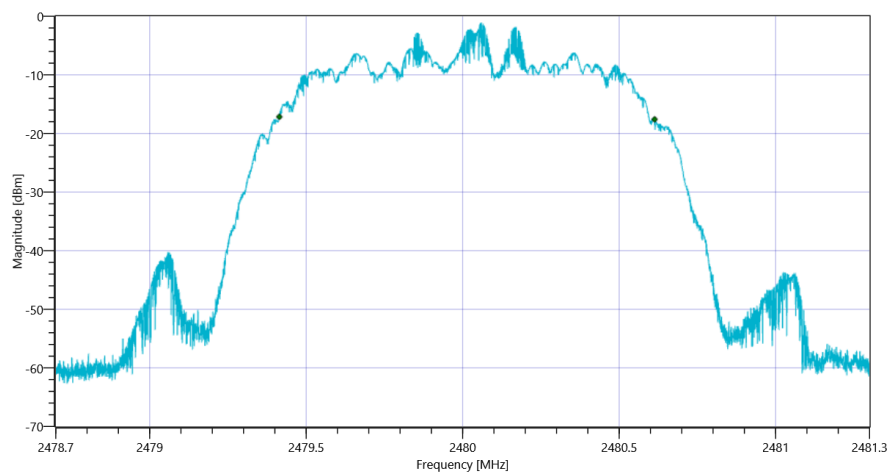

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4DQPSK 99PCT


Plot: Bandwidth within Band

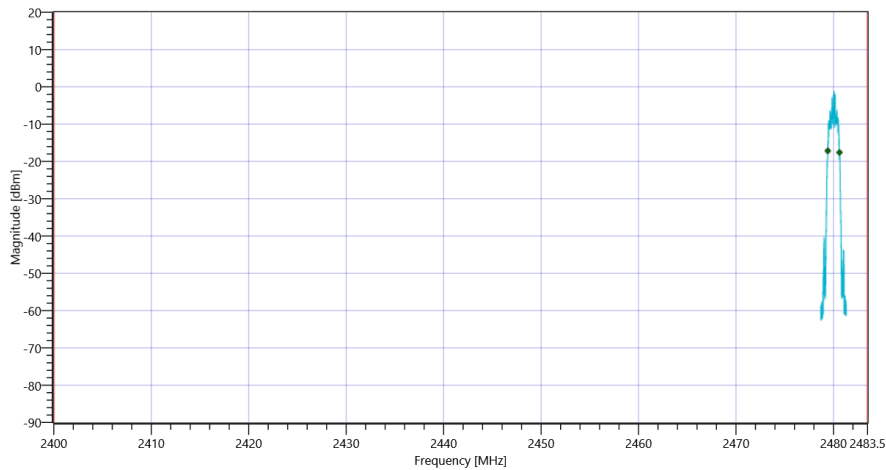

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4DQPSK


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1326	kHz	INFO
T1 20dB	2400.000000	---	2479.3484	MHz	PASS
T2 20dB	---	2483.500000	2480.6747	MHz	PASS

Plot: Bandwidth only

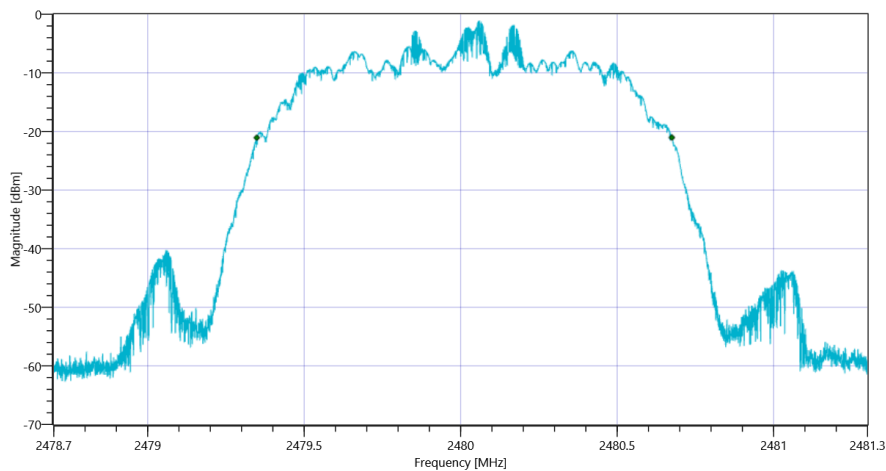

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi-4DQPSK 20dB

Plot: Bandwidth within Band

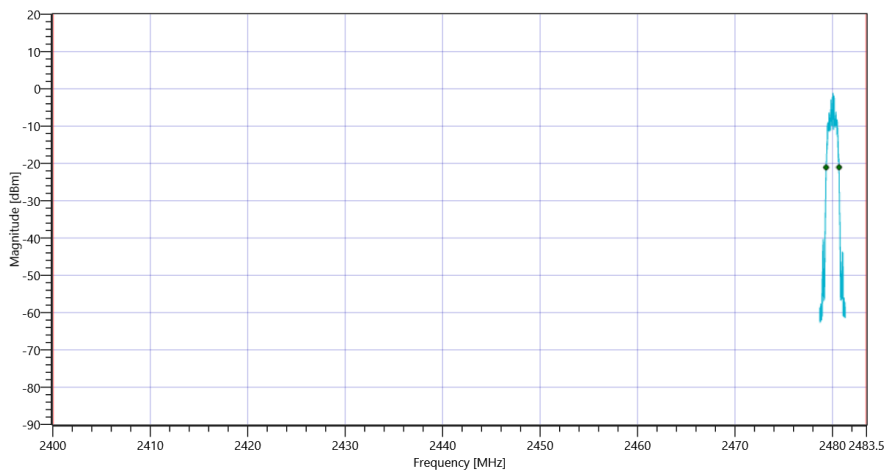

General verdict

no verdict

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK

Test References

TC Start	31.05.2022 10:37:50
Ambit Temp [°C] Humidity [rel%]	24.0 32
System Version	3.1.0.0
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT - 20dB FHSS - BT Classic EDR 8DPSK
Add. Information	

EUT Common Settings BT Classic

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT Classic EDR 8DPSK
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI

Test at TX 2402 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.15	dBm	INFO
Ref. Frequency	---	---	2402.100	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.15 10.09 15
Start [MHz] Stop [MHz]	2400.700 2403.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1197.180	kHz	INFO
T1 99%	2400.000000	---	2401.4262	MHz	PASS
T2 99%	---	2483.500000	2402.6234	MHz	PASS

Plot: Bandwidth only

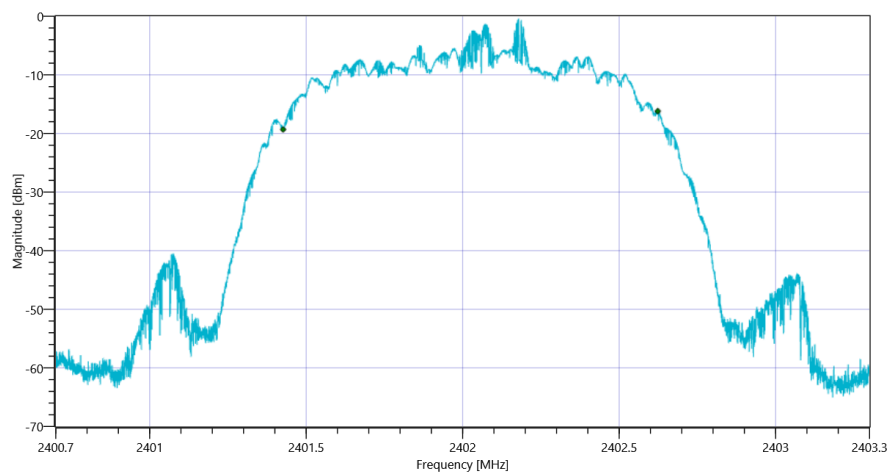

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK 99PCT


Plot: Bandwidth within Band

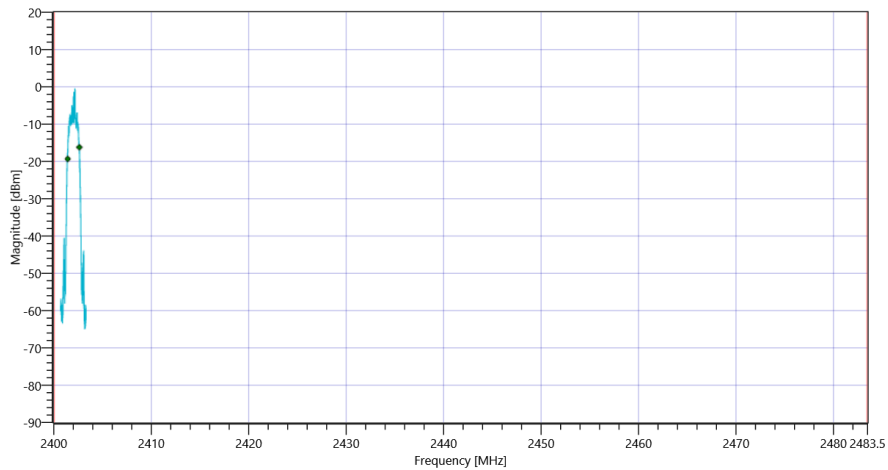

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1292	kHz	INFO
T1 20dB	2400.000000	---	2401.3815	MHz	PASS
T2 20dB	---	2483.500000	2402.6739	MHz	PASS

Plot: Bandwidth only

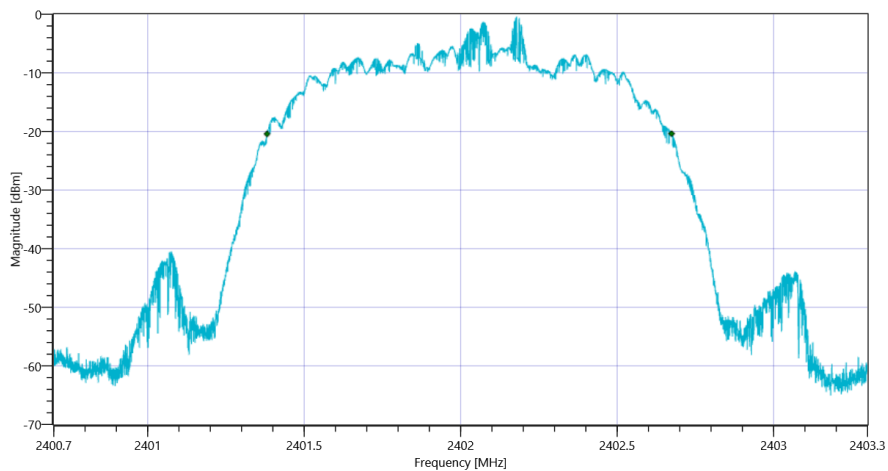

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK 20dB

Plot: Bandwidth within Band

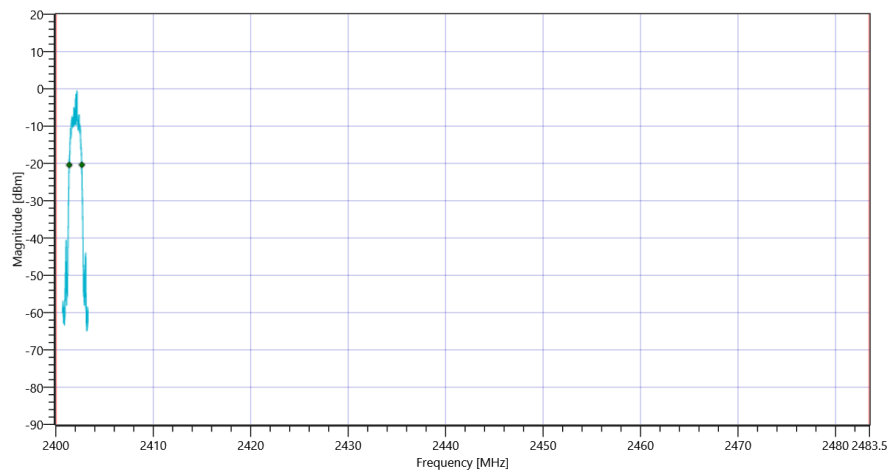

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK

Test at TX 2441 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.26	dBm	INFO
Ref. Frequency	---	---	2441.000	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.26 10.1 15
Start [MHz] Stop [MHz]	2439.700 2442.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1197.700	kHz	INFO
T1 99%	2400.000000	---	2440.4195	MHz	PASS
T2 99%	---	2483.500000	2441.6172	MHz	PASS

Plot: Bandwidth only

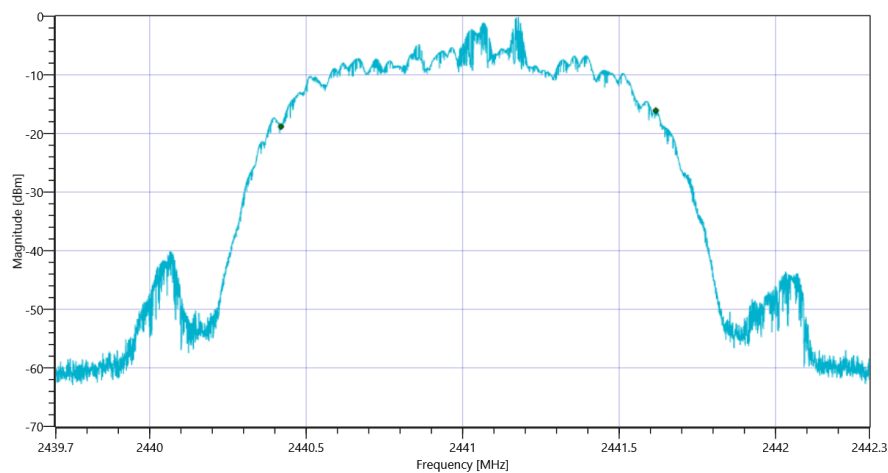

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK 99PCT


Plot: Bandwidth within Band

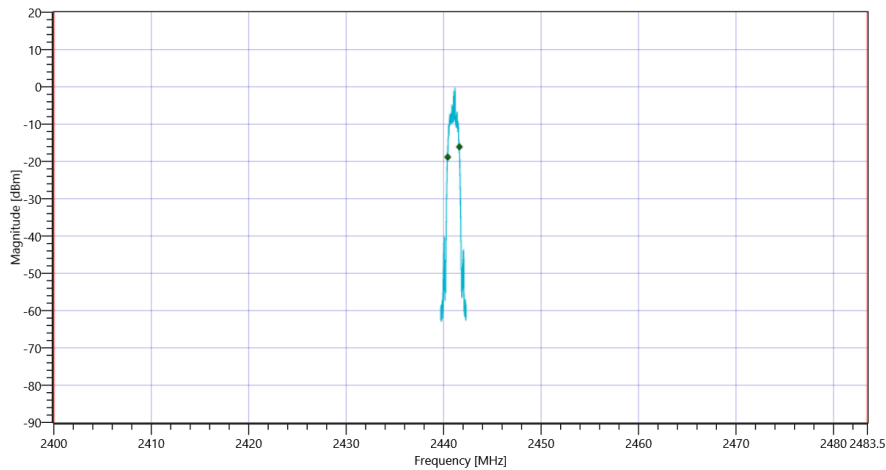

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1292	kHz	INFO
T1 20dB	2400.000000	---	2440.3755	MHz	PASS
T2 20dB	---	2483.500000	2441.6674	MHz	PASS

Plot: Bandwidth only

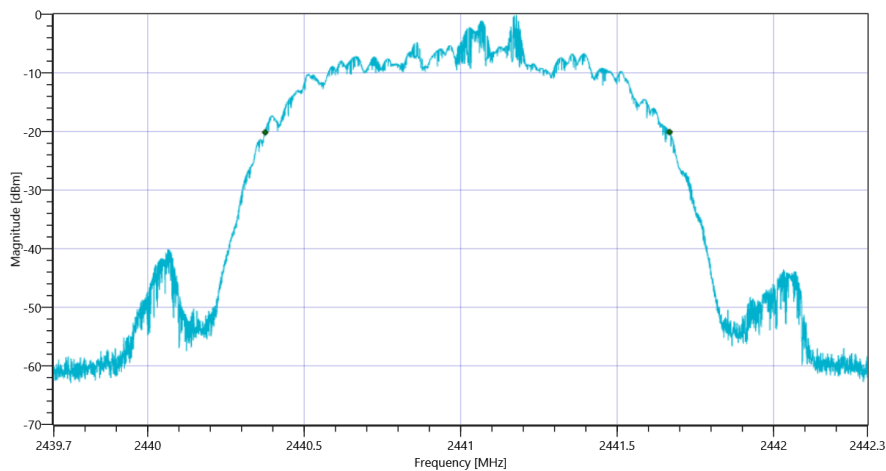

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK 20dB

Plot: Bandwidth within Band

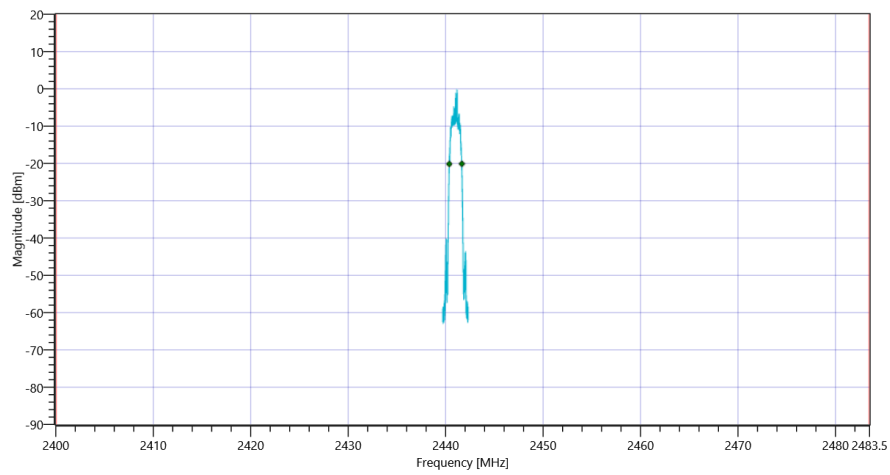

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK

Test at TX 2480 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.71	dBm	INFO
Ref. Frequency	---	---	2480.000	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.71 10.15 15
Start [MHz] Stop [MHz]	2478.700 2481.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1198.480	kHz	INFO
T1 99%	2400.000000	---	2479.4122	MHz	PASS
T2 99%	---	2483.500000	2480.6107	MHz	PASS

Plot: Bandwidth only

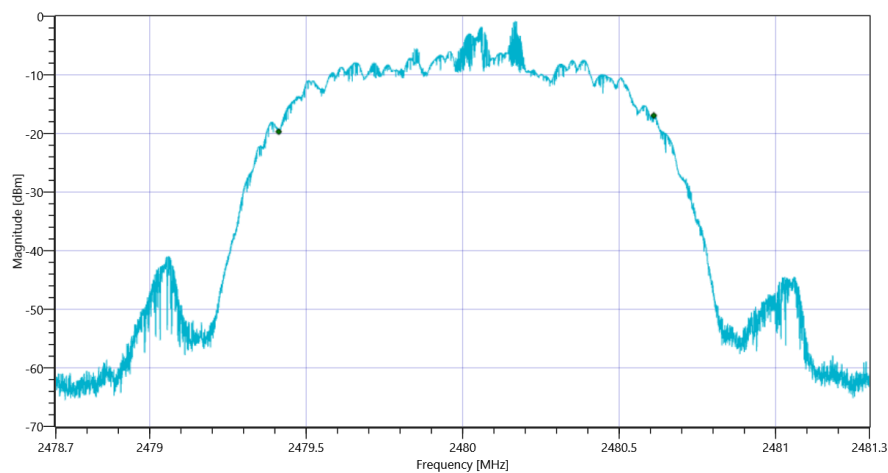

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK 99PCT


Plot: Bandwidth within Band

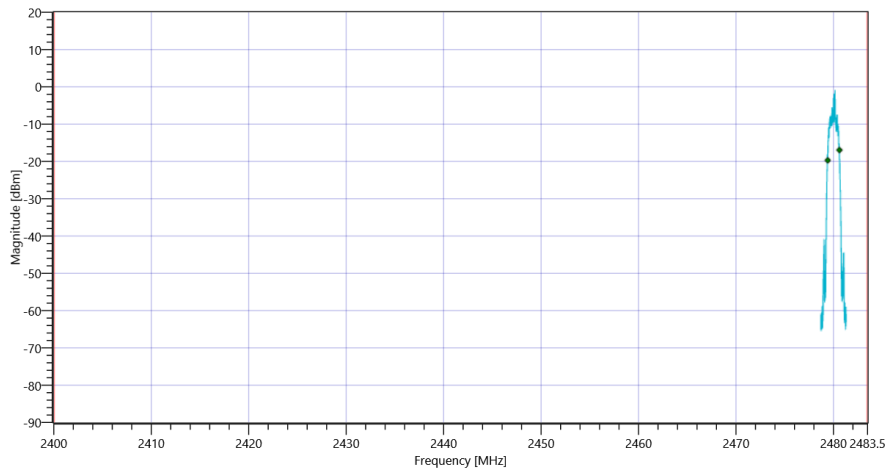

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1291	kHz	INFO
T1 20dB	2400.000000	---	2479.3698	MHz	PASS
T2 20dB	---	2483.500000	2480.6607	MHz	PASS

Plot: Bandwidth only

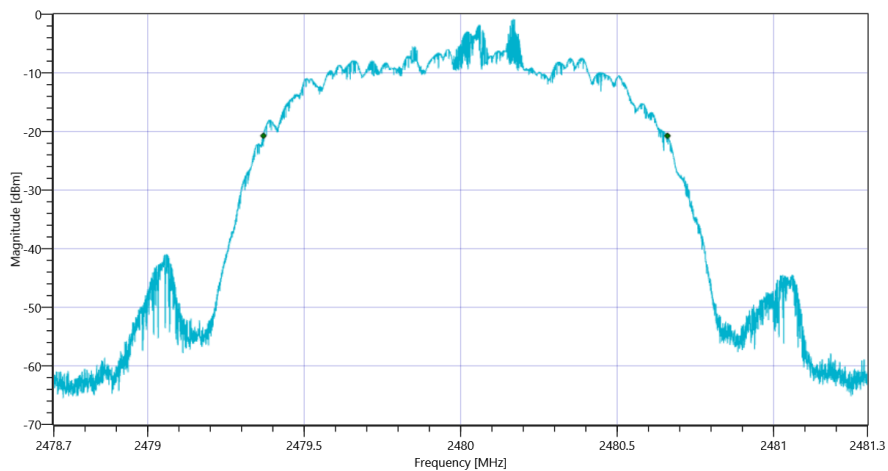

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK 20dB

Plot: Bandwidth within Band

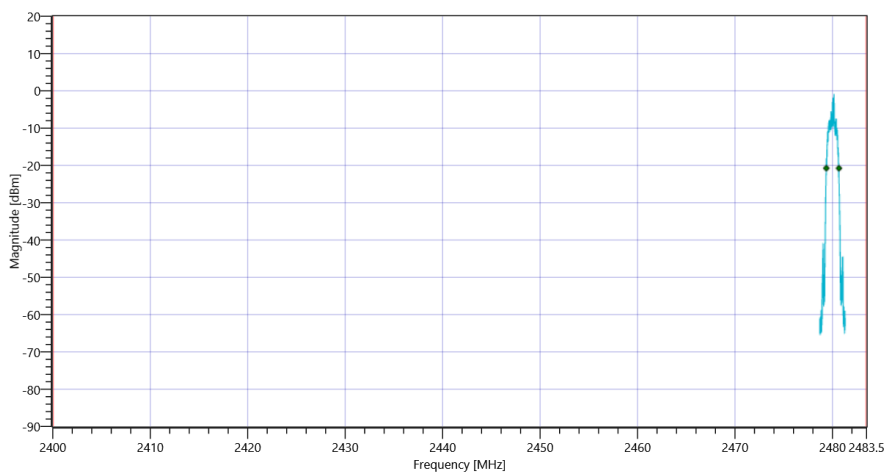

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK

General verdict

no verdict

FCC 15.247 # Carrier frequency separation FHSS ~ BT Classic Basic rate

Test References	
TC Start	31.05.2022 09:39:41
Ambit Temp [°C] Humidity [rel%]	23.2 33
System Version	3.1.0.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Carrier Frequency Separation FHSS - BT Classic Basic Rate
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX hopping MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.73	dBm	INFO
Ref. Frequency	---	---	2425.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.73 10.1 15
Start [MHz] Stop [MHz]	2435.500 2445.500
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 20000 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
1 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
1 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
2 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
2 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
3 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
3 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
4 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
4 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
5 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
5 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
6 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
6 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
7 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
7 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
8 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
8 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
9 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
9 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
Carrier Freq. (rnd)	---	---	2436	MHz	INFO
Carrier Freq. (rnd)	---	---	2437	MHz	INFO
Carrier Freq. (rnd)	---	---	2438	MHz	INFO
Carrier Freq. (rnd)	---	---	2439	MHz	INFO
Carrier Freq. (rnd)	---	---	2440	MHz	INFO
Carrier Freq. (rnd)	---	---	2441	MHz	INFO
Carrier Freq. (rnd)	---	---	2442	MHz	INFO
Carrier Freq. (rnd)	---	---	2443	MHz	INFO
Carrier Freq. (rnd)	---	---	2444	MHz	INFO
Carrier Freq. (rnd)	---	---	2445	MHz	INFO

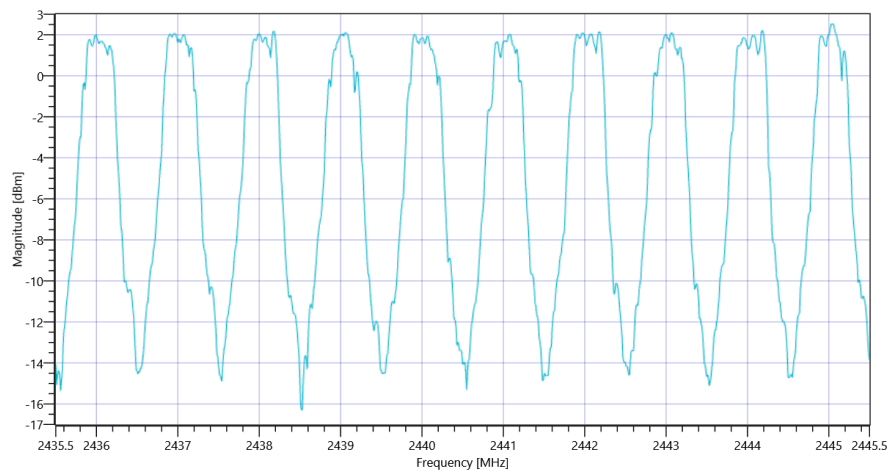

FCC 15.247 # Carrier frequency separation FHSS ~ BT Classic Basic rate

General verdict

no verdict

FCC 15.247 # Number of hopping channels FHSS ~ BT Classic Basic rate

Test References	
TC Start	31.05.2022 09:38:47
Ambit Temp [°C] Humidity [rel%]	23.2 33
System Version	3.1.0.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Number Of Hopping Channels FHSS - BT Classic Basic Rate
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX hopping MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.70	dBm	INFO
Ref. Frequency	---	---	2463.880	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.70 10.1 15
Start [MHz] Stop [MHz]	2399.000 2483.000
RBW [MHz] VBW [MHz]	0.200000 0.500000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 10000 1001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Hopp channel (rounded)	---	---	2402	MHz	INFO
Hopp channel (rounded)	---	---	2403	MHz	INFO
Hopp channel (rounded)	---	---	2404	MHz	INFO
Hopp channel (rounded)	---	---	2405	MHz	INFO
Hopp channel (rounded)	---	---	2406	MHz	INFO
Hopp channel (rounded)	---	---	2407	MHz	INFO
Hopp channel (rounded)	---	---	2408	MHz	INFO
Hopp channel (rounded)	---	---	2409	MHz	INFO
Hopp channel (rounded)	---	---	2410	MHz	INFO
Hopp channel (rounded)	---	---	2411	MHz	INFO
Hopp channel (rounded)	---	---	2412	MHz	INFO
Hopp channel (rounded)	---	---	2413	MHz	INFO
Hopp channel (rounded)	---	---	2414	MHz	INFO
Hopp channel (rounded)	---	---	2415	MHz	INFO
Hopp channel (rounded)	---	---	2416	MHz	INFO
Hopp channel (rounded)	---	---	2417	MHz	INFO
Hopp channel (rounded)	---	---	2418	MHz	INFO
Hopp channel (rounded)	---	---	2419	MHz	INFO
Hopp channel (rounded)	---	---	2420	MHz	INFO

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Hopp channel (rounded)	---	---	2421	MHz	INFO
Hopp channel (rounded)	---	---	2422	MHz	INFO
Hopp channel (rounded)	---	---	2423	MHz	INFO
Hopp channel (rounded)	---	---	2424	MHz	INFO
Hopp channel (rounded)	---	---	2425	MHz	INFO
Hopp channel (rounded)	---	---	2426	MHz	INFO
Hopp channel (rounded)	---	---	2427	MHz	INFO
Hopp channel (rounded)	---	---	2428	MHz	INFO
Hopp channel (rounded)	---	---	2429	MHz	INFO
Hopp channel (rounded)	---	---	2430	MHz	INFO
Hopp channel (rounded)	---	---	2431	MHz	INFO
Hopp channel (rounded)	---	---	2432	MHz	INFO
Hopp channel (rounded)	---	---	2433	MHz	INFO
Hopp channel (rounded)	---	---	2434	MHz	INFO
Hopp channel (rounded)	---	---	2435	MHz	INFO
Hopp channel (rounded)	---	---	2436	MHz	INFO
Hopp channel (rounded)	---	---	2437	MHz	INFO
Hopp channel (rounded)	---	---	2438	MHz	INFO
Hopp channel (rounded)	---	---	2439	MHz	INFO
Hopp channel (rounded)	---	---	2440	MHz	INFO
Hopp channel (rounded)	---	---	2441	MHz	INFO
Hopp channel (rounded)	---	---	2442	MHz	INFO
Hopp channel (rounded)	---	---	2443	MHz	INFO
Hopp channel (rounded)	---	---	2444	MHz	INFO
Hopp channel (rounded)	---	---	2445	MHz	INFO
Hopp channel (rounded)	---	---	2446	MHz	INFO
Hopp channel (rounded)	---	---	2447	MHz	INFO
Hopp channel (rounded)	---	---	2448	MHz	INFO

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Hopp channel (rounded)	---	---	2449	MHz	INFO
Hopp channel (rounded)	---	---	2450	MHz	INFO
Hopp channel (rounded)	---	---	2451	MHz	INFO
Hopp channel (rounded)	---	---	2452	MHz	INFO
Hopp channel (rounded)	---	---	2453	MHz	INFO
Hopp channel (rounded)	---	---	2454	MHz	INFO
Hopp channel (rounded)	---	---	2455	MHz	INFO
Hopp channel (rounded)	---	---	2456	MHz	INFO
Hopp channel (rounded)	---	---	2457	MHz	INFO
Hopp channel (rounded)	---	---	2458	MHz	INFO
Hopp channel (rounded)	---	---	2459	MHz	INFO
Hopp channel (rounded)	---	---	2460	MHz	INFO
Hopp channel (rounded)	---	---	2461	MHz	INFO
Hopp channel (rounded)	---	---	2462	MHz	INFO
Hopp channel (rounded)	---	---	2463	MHz	INFO
Hopp channel (rounded)	---	---	2464	MHz	INFO
Hopp channel (rounded)	---	---	2465	MHz	INFO
Hopp channel (rounded)	---	---	2466	MHz	INFO
Hopp channel (rounded)	---	---	2467	MHz	INFO
Hopp channel (rounded)	---	---	2468	MHz	INFO
Hopp channel (rounded)	---	---	2469	MHz	INFO
Hopp channel (rounded)	---	---	2470	MHz	INFO
Hopp channel (rounded)	---	---	2471	MHz	INFO
Hopp channel (rounded)	---	---	2472	MHz	INFO
Hopp channel (rounded)	---	---	2473	MHz	INFO
Hopp channel (rounded)	---	---	2474	MHz	INFO
Hopp channel (rounded)	---	---	2475	MHz	INFO
Hopp channel (rounded)	---	---	2476	MHz	INFO

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Hopp channel (rounded)	---	---	2477	MHz	INFO
Hopp channel (rounded)	---	---	2478	MHz	INFO
Hopp channel (rounded)	---	---	2479	MHz	INFO
Hopp channel (rounded)	---	---	2480	MHz	INFO
Σ Hopping channels	15	---	79	Number	PASS

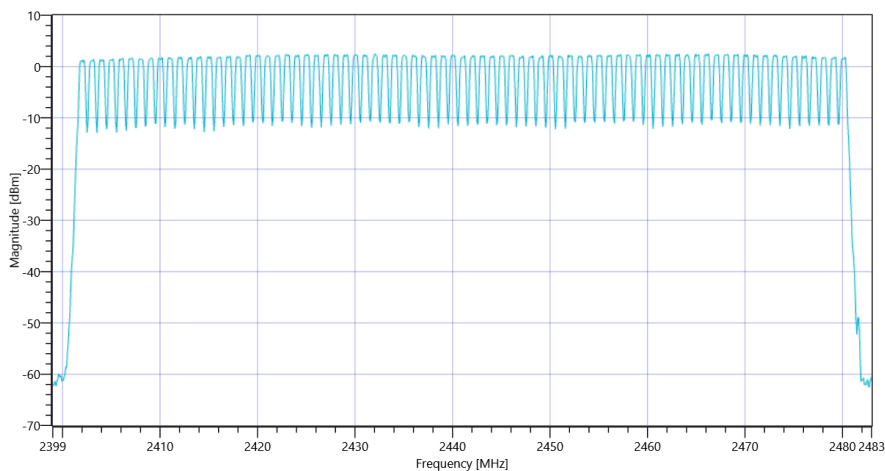

FCC 15.247 # Number of hopping channels FHSS ~ BT Classic Basic rate

General verdict	no verdict
-----------------	------------

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate

Test References	
TC Start	31.05.2022 09:44:39
Ambit Temp [°C] Humidity [rel%]	23.3 32
System Version	3.1.0.0
Test Specification	FCC 15.247 -
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted FHSS - BT Classic Basic Rate
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.73	dBm	INFO
Ref. Frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.73 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.00 MHz	---	---	0.79	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15166 MHz	0	---	28.2	dB	INFO

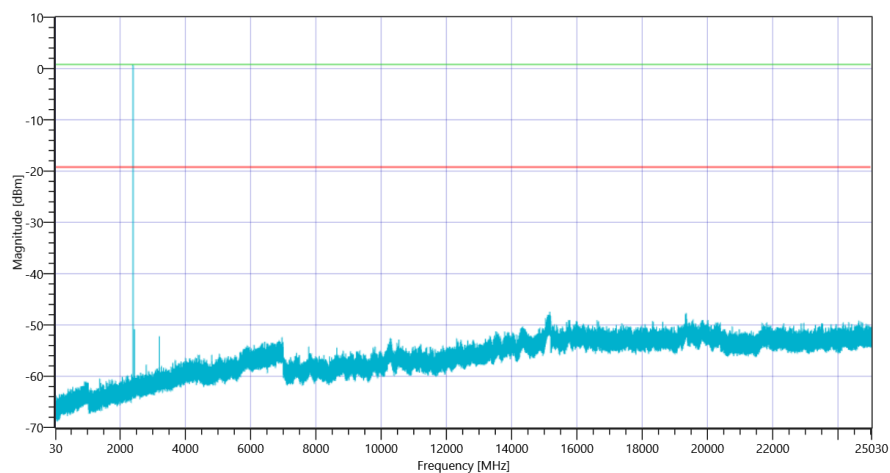

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate 2402

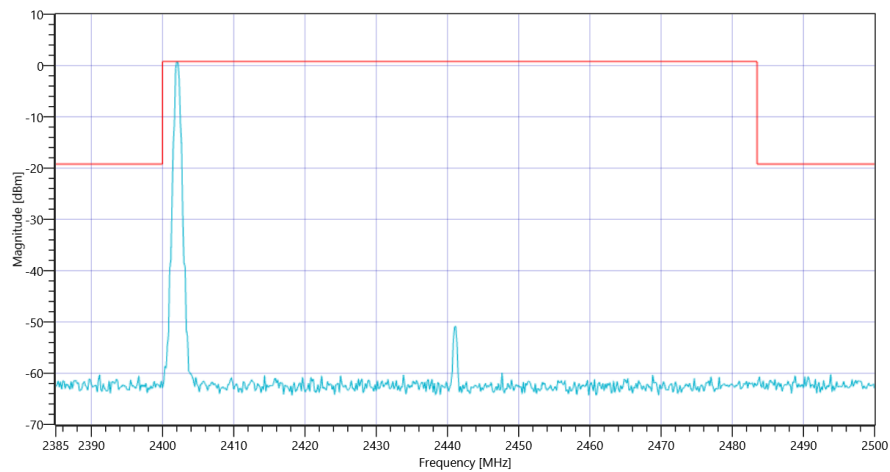

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate 2402

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.29	dBm	INFO
Ref. Frequency	---	---	2440.900	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.29 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2441.17 MHz	---	---	1.67	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15140.167 MHz	0	---	28.07	dB	INFO

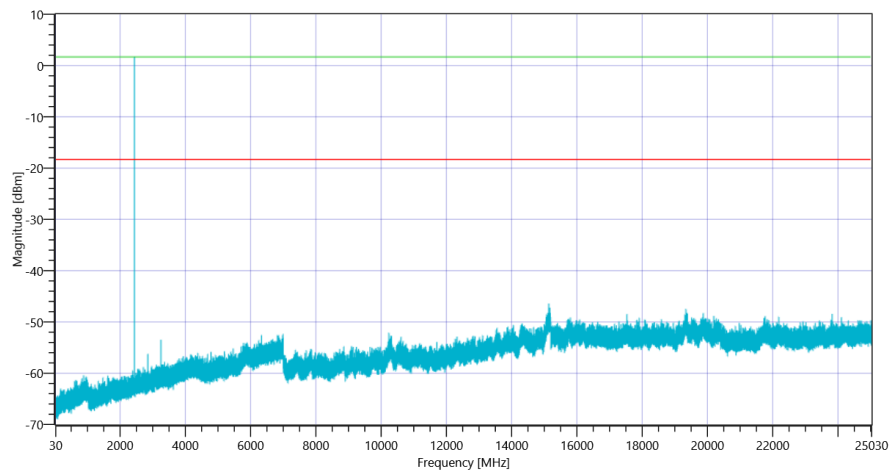

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate 2441

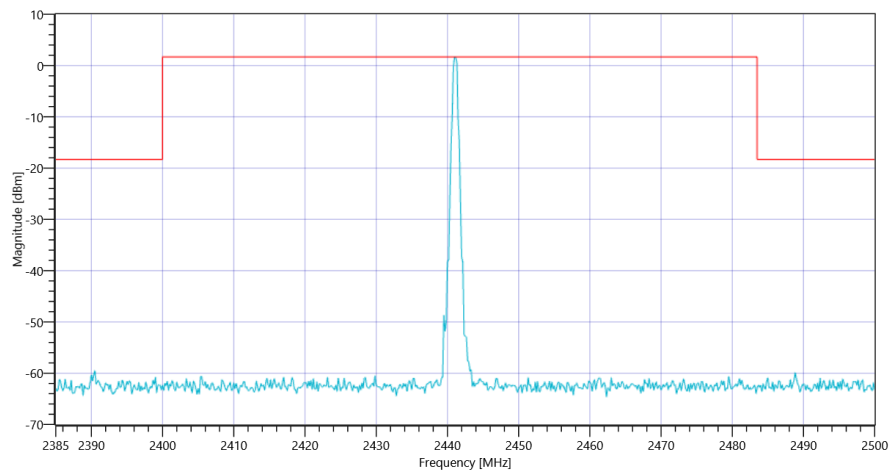

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate 2441

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.93	dBm	INFO
Ref. Frequency	---	---	2480.000	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.93 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.17 MHz	---	---	1.14	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19339.667 MHz	0	---	28.29	dB	INFO

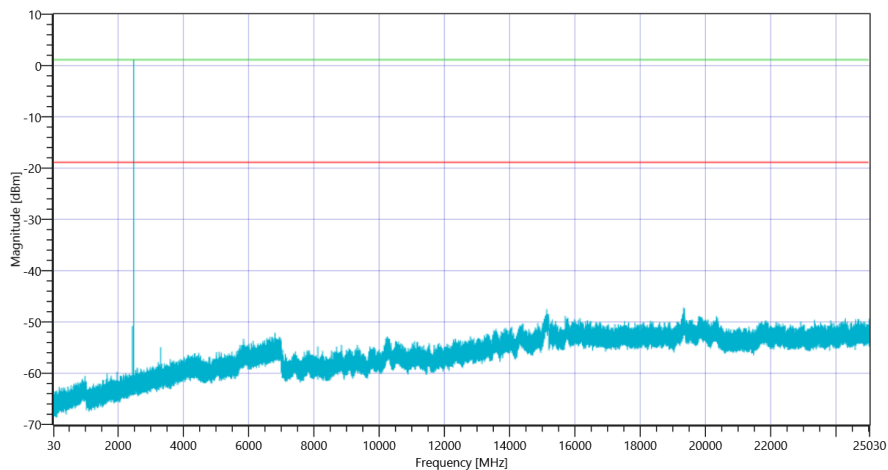

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate 2480

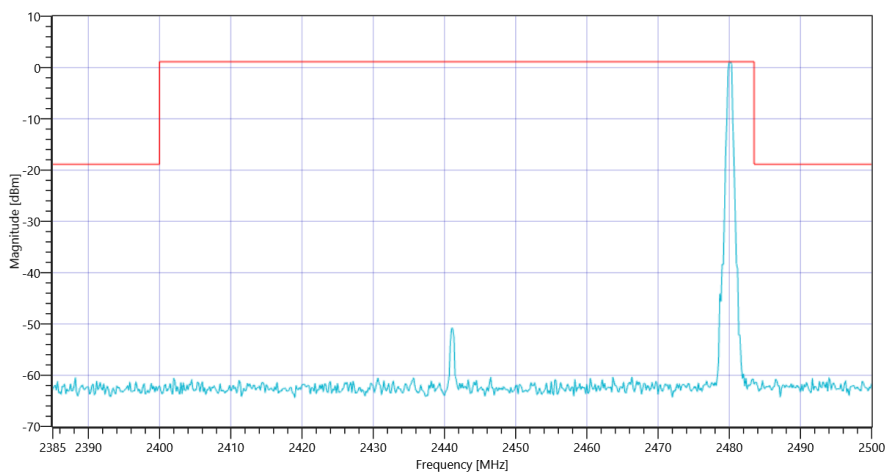

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate 2480

General verdict

no verdict

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi/4DQPSK

Test References	
TC Start	31.05.2022 10:12:08
Ambit Temp [°C] Humidity [rel%]	23.8 32
System Version	3.1.0.0
Test Specification	FCC 15.247 -
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted FHSS - BT Classic EDR Pi/4DQPSK
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic EDR Pi/4DQPSK
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.98	dBm	INFO
Ref. Frequency	---	---	2401.800	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.98 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.17 MHz	---	---	-0.15	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15130.333 MHz	0	---	26.55	dB	INFO

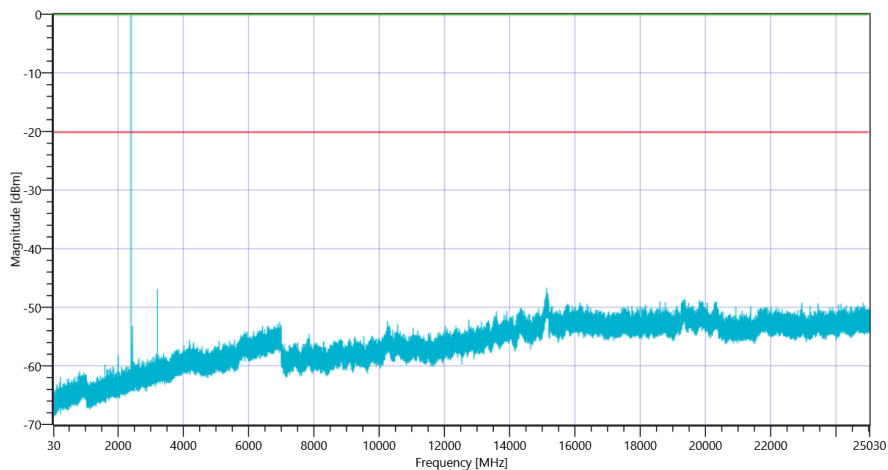

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi-4QPSK 2402

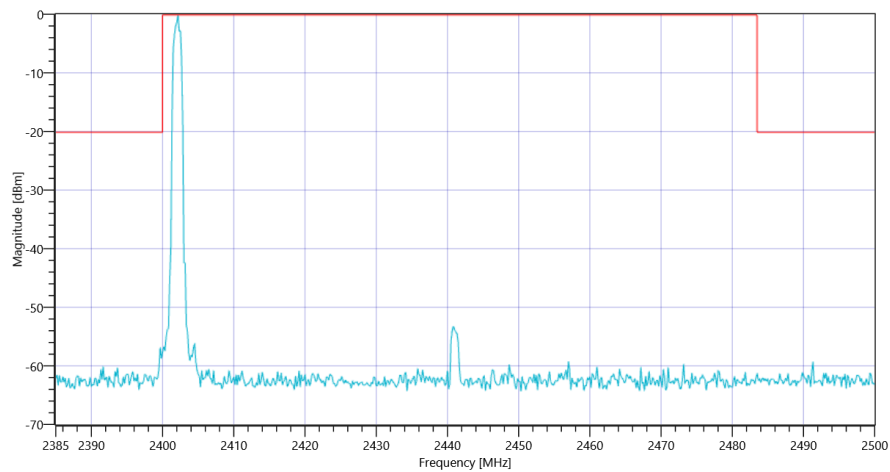

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi-4DQPSK 2402

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.44	dBm	INFO
Ref. Frequency	---	---	2440.800	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.44 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2441.00 MHz	---	---	0.46	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19351.333 MHz	0	---	28.02	dB	INFO

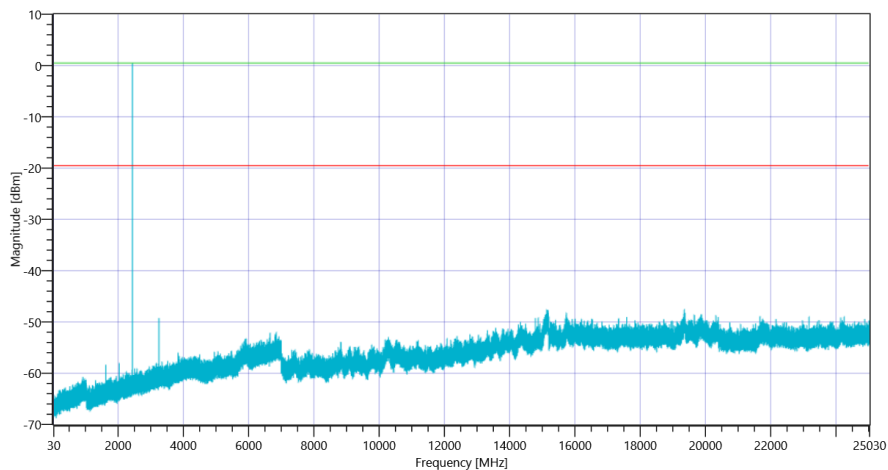

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi-4QPSK 2441

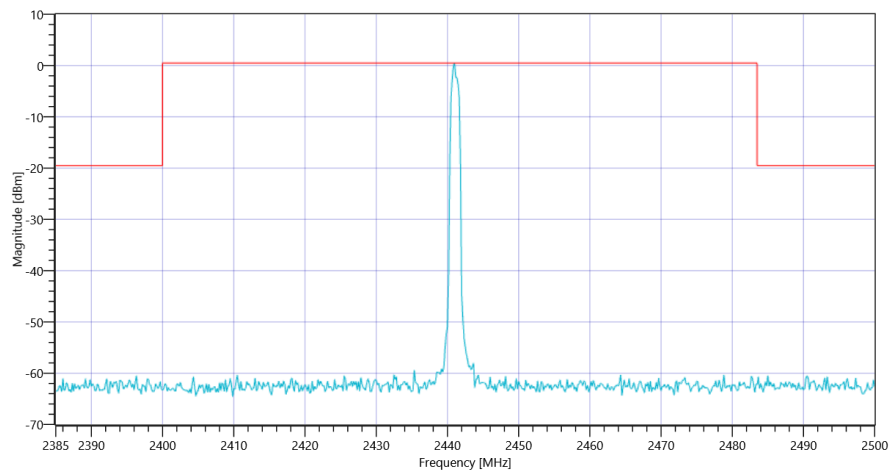

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi-4QPSK 2441

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.61	dBm	INFO
Ref. Frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.61 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	-0.34	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19357.333 MHz	0	---	27.1	dB	INFO

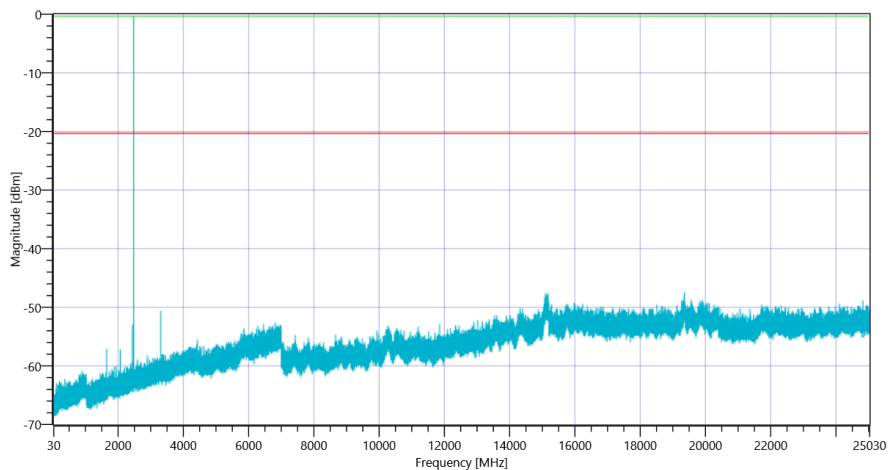

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi-4QPSK 2480

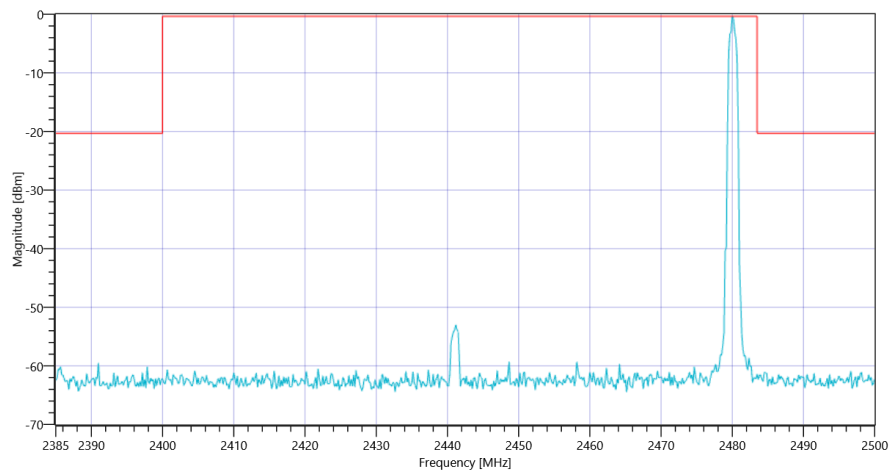

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi-4QPSK 2480

General verdict

no verdict

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK

Test References	
TC Start	31.05.2022 10:40:42
Ambit Temp [°C] Humidity [rel%]	24.1 32
System Version	3.1.0.0
Test Specification	FCC 15.247 -
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted FHSS - BT Classic EDR 8DPSK
Add. Information	

EUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	No
EUT BT Address (if Inquiry No)	4375B1004D77
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter	
Technology to test	BT Classic EDR 8DPSK
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.62	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

Test at TX 2402 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.59	dBm	INFO
Ref. Frequency	---	---	2401.900	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.59 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.17 MHz	---	---	-0.05	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 3202.667 MHz	0	---	26.97	dB	INFO

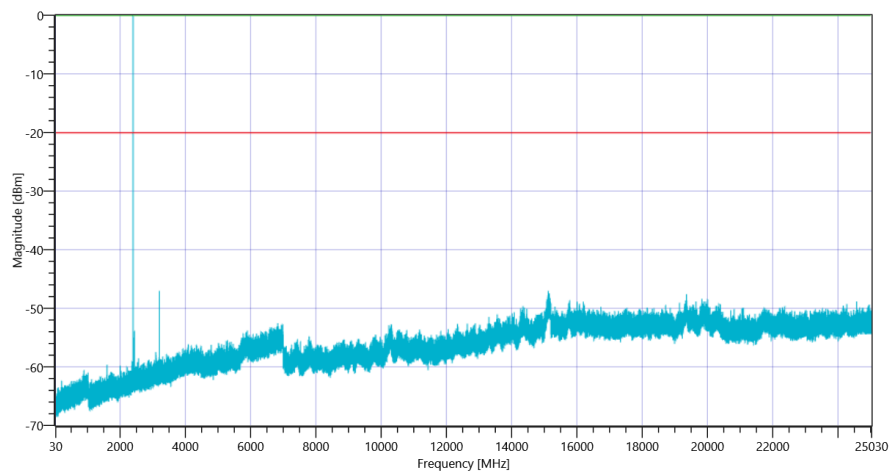

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK 2402

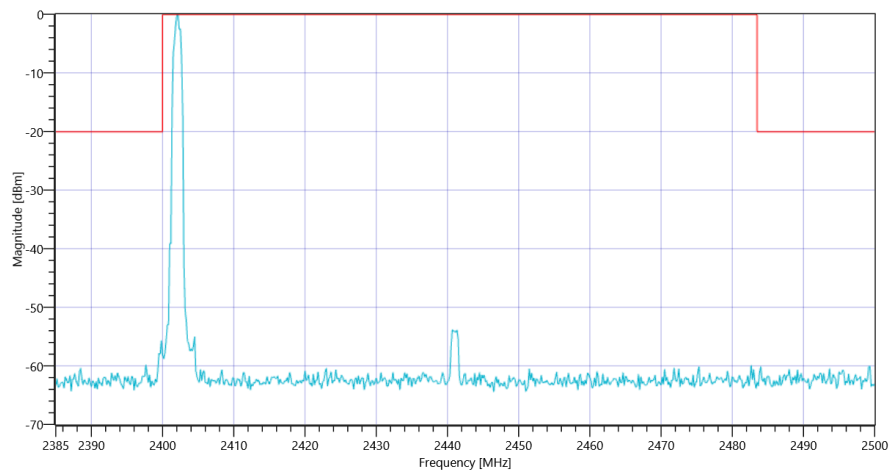

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK 2402

Test at TX 2441 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.07	dBm	INFO
Ref. Frequency	---	---	2441.000	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.07 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2441.00 MHz	---	---	0.70	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19344.667 MHz	0	---	27.86	dB	INFO

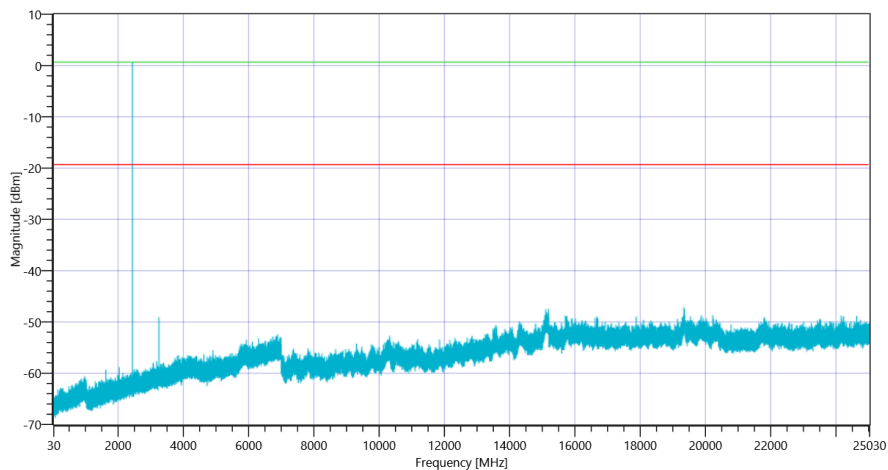

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK 2441

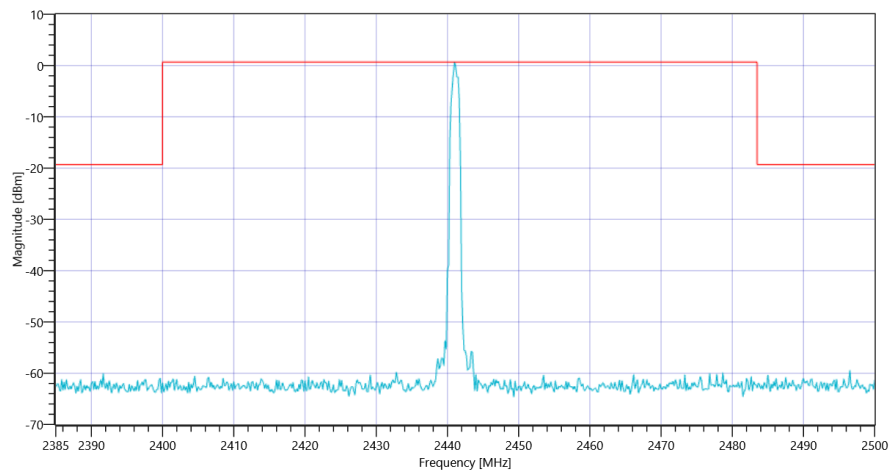

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK 2441

Test at TX 2480 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.41	dBm	INFO
Ref. Frequency	---	---	2480.100	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.41 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 25 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	-2.02	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15169.333 MHz	0	---	24.96	dB	INFO

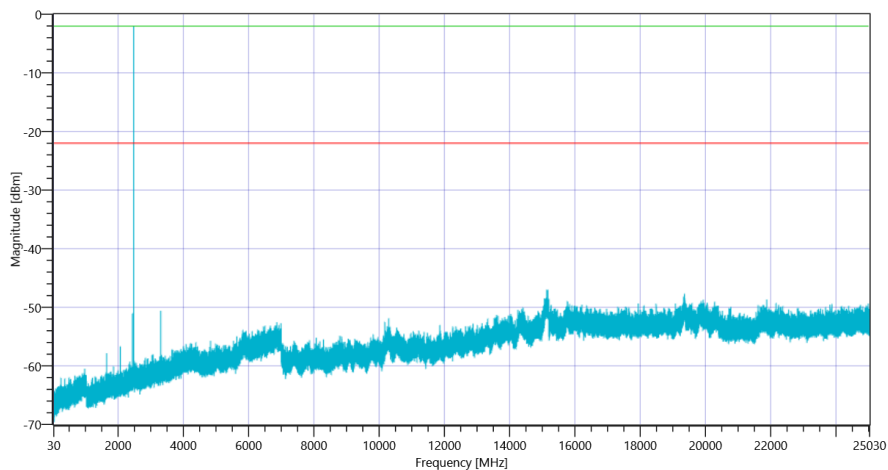

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK 2480

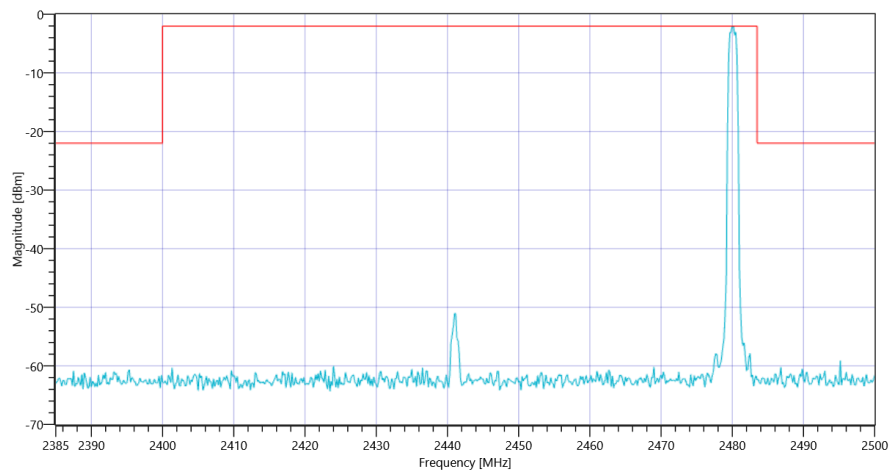

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK 2480

General verdict

no verdict

- END OF DOCUMENT -