


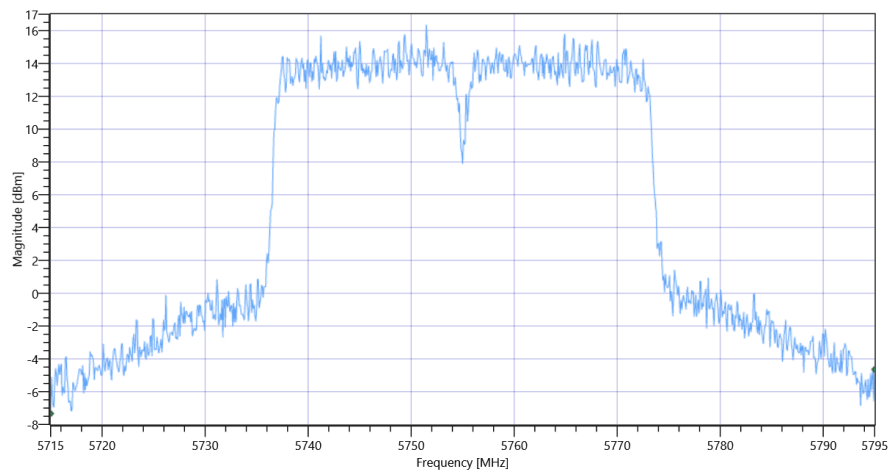

FCC 15.247 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.76 18.77 25
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	23.49	dBm	INFO
Duty Cycle Correction	---	---	0.67	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	24.16	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	30.03	24.16	dBm	not applicable

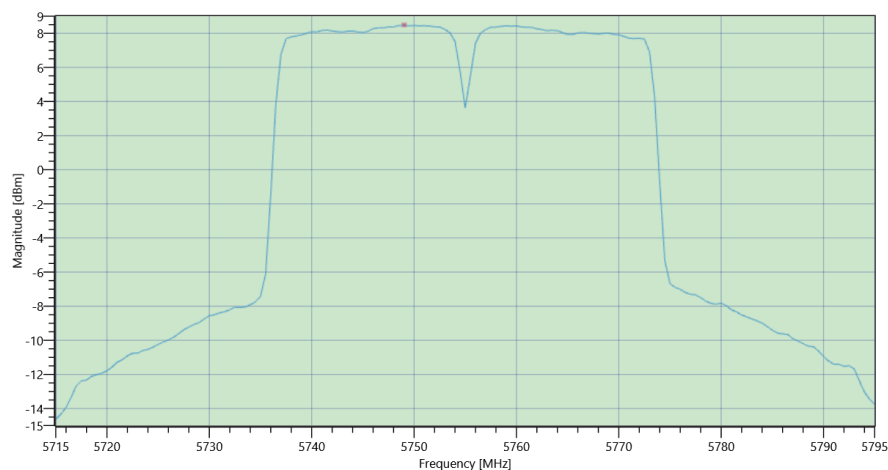

FCC 15.247 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.76 18.77 30
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	5.52	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0.67	dB	INFO
Power Spectral Density DC corrected	---	30	6.19	dBm/0.5MHz	PASS

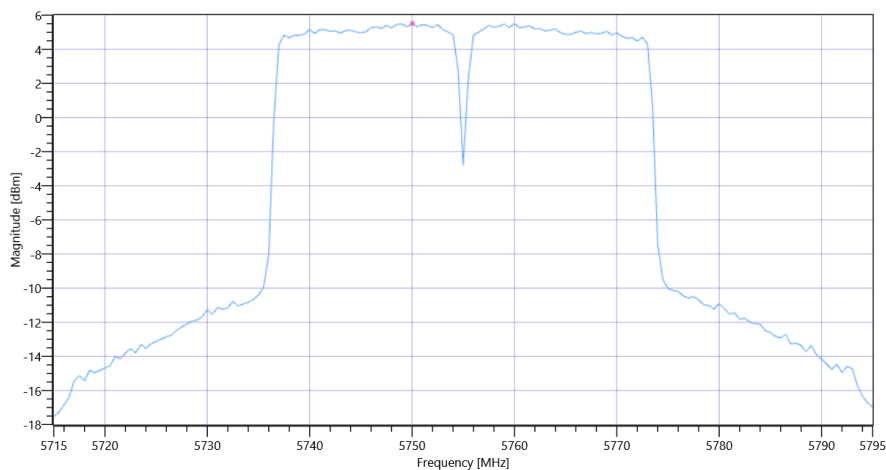

FCC 15.247 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3 PSD UNII-3

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3

Test References

TC Start	18.07.2022 14:00:37
Ambit Temp [°C] Humidity [rel%]	27.8 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5795 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	17.66	dBm	INFO
Ref. Frequency	---	---	5803.190	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:71					
Duty Cycle (Burst Ratio) max	---	---	0.972	---	INFO
Duty Cycle max	---	---	0.123	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.857	---	INFO
Duty Cycle min	---	---	0.67	dB	INFO
Max TX Burst Length	---	---	2.575	ms	INFO
Min Gap Length	---	---	0.075	ms	INFO
Max Gap Length	---	---	0.075	ms	INFO

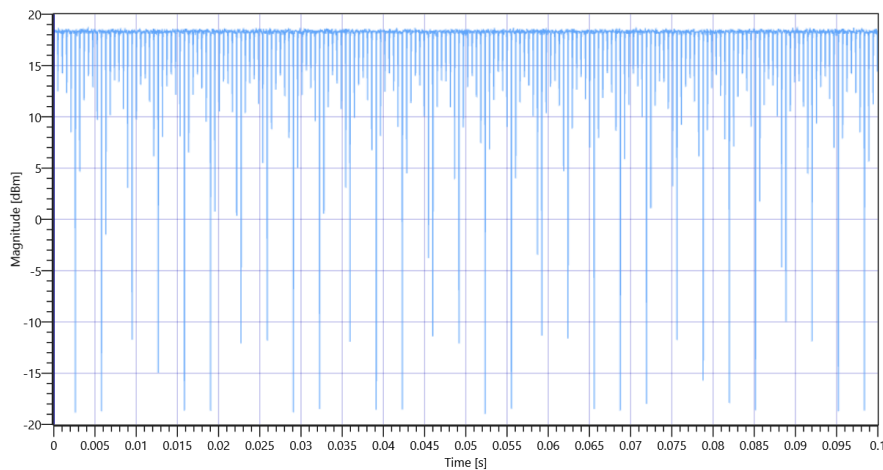


FCC 15.247 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3 5795 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	80	MHz	INFO
T1 26dB	---	---	5755.0000	MHz	INFO
T2 26dB	---	---	5835.0000	MHz	INFO

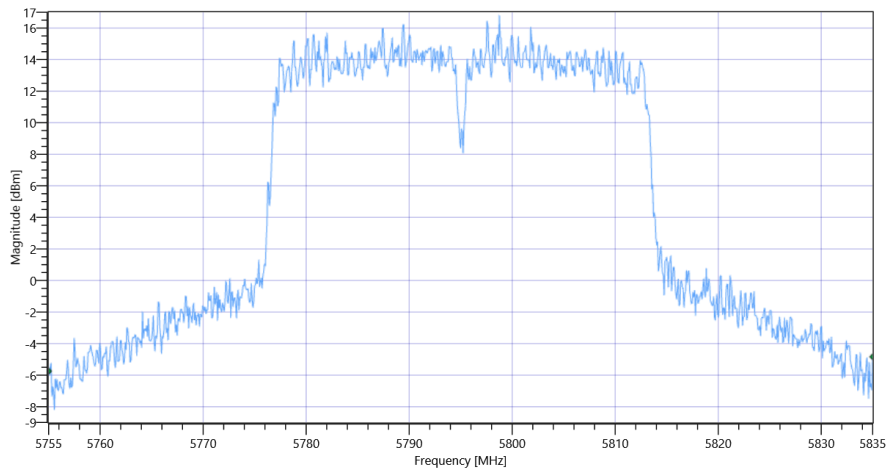

FCC 15.247 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.66 18.75 25
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	23.47	dBm	INFO
Duty Cycle Correction	---	---	0.67	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	24.14	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	30.03	24.14	dBm	not applicable

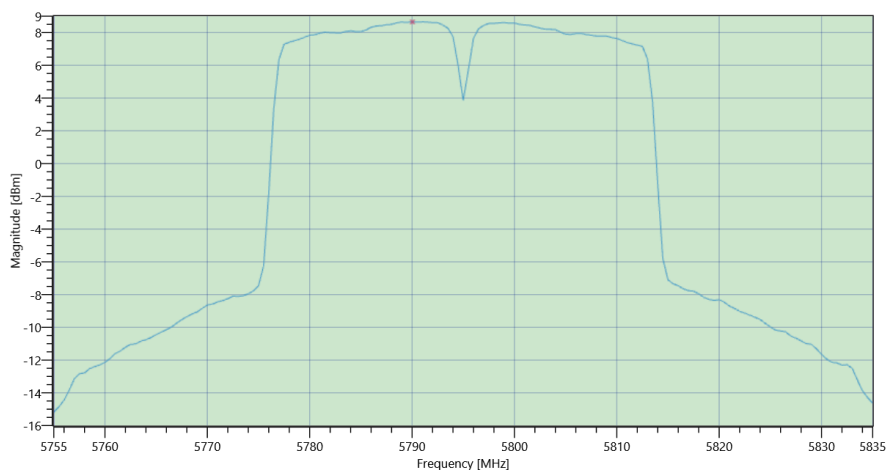

FCC 15.247 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.66 18.75 30
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	5.65	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0.67	dB	INFO
Power Spectral Density DC corrected	---	30	6.32	dBm/0.5MHz	PASS

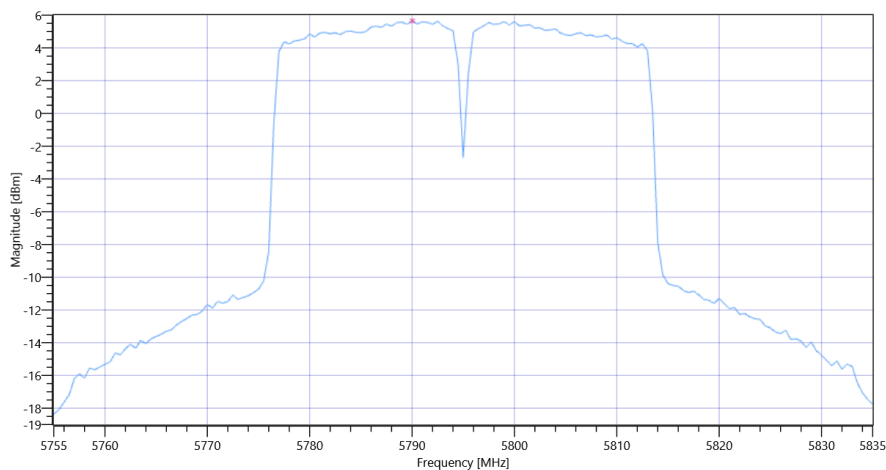

FCC 15.247 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3 PSD UNII-3

General verdict

PASS

FCC 15.407, ISSED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3

Test References

TC Start	18.07.2022 13:00:25
Ambit Temp [°C] Humidity [rel%]	27.4 30
System Version	3.2.0.2
Test Specification	FCC 15.407, ISSED RSS247 -
Test Method	KDB789033 D02, C.2.
TC Version	0.0.1
My Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ac-VHT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5755 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	17.66	dBm	INFO
Ref. Frequency	---	---	5753.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.66 18.77 30
Start [MHz] Stop [MHz]	5705.000 5805.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	2 1500 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth (6dB)	0.500	---	36.3	MHz	PASS

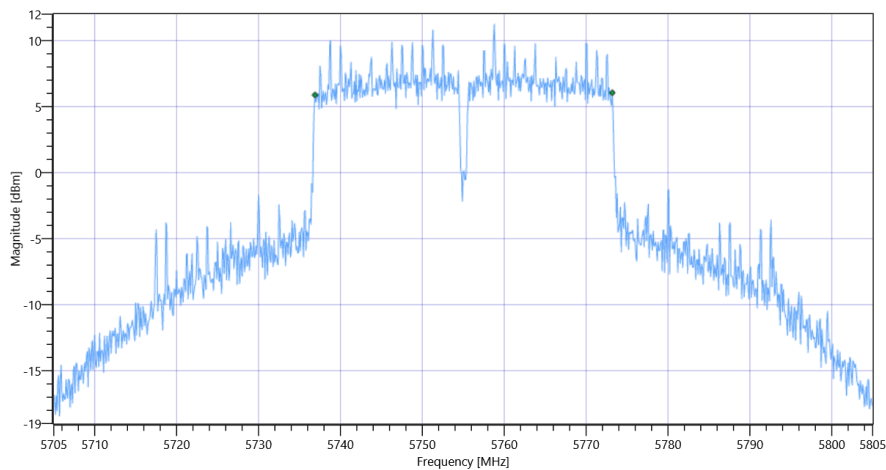

FCC 15.407, ISSED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3

General verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3

Test References

TC Start	18.07.2022 13:08:25
Ambit Temp [°C] Humidity [rel%]	27.4 30
System Version	3.2.0.2
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	KDB789033 D02, C.2.
TC Version	0.0.1
My Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ac-VHT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5795 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	17.88	dBm	INFO
Ref. Frequency	---	---	5799.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.88 18.75 30
Start [MHz] Stop [MHz]	5745.000 5845.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	2 1500 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth (6dB)	0.500	---	36.1	MHz	PASS

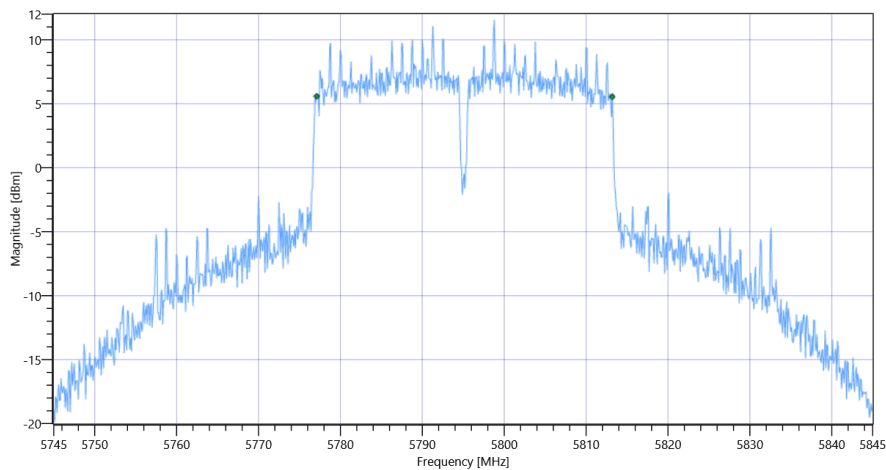

FCC 15.407, ISSED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3

General verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3

Test References

TC Start	18.07.2022 13:58:39
Ambit Temp [°C] Humidity [rel%]	27.8 30
System Version	3.2.0.2
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	KDB789033 D02, C.2.
TC Version	0.0.1
My Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ac-VHT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5755 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	18.46	dBm	INFO
Ref. Frequency	---	---	5747.010	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	30.46 18.77 30
Start [MHz] Stop [MHz]	5705.000 5805.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	2 1500 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth (6dB)	0.500	---	36.3	MHz	PASS

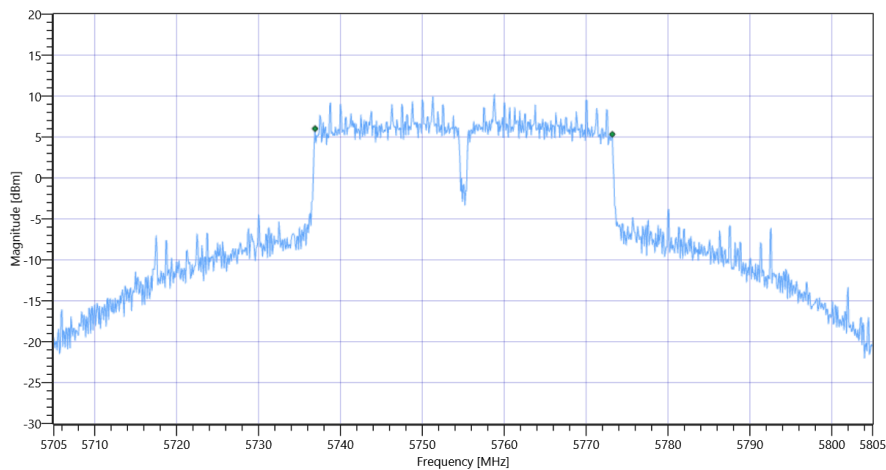

FCC 15.407, ISSED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3

General verdict

PASS

FCC 15.407, ISSED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3

Test References

TC Start	18.07.2022 14:06:53
Ambit Temp [°C] Humidity [rel%]	27.8 30
System Version	3.2.0.2
Test Specification	FCC 15.407, ISSED RSS247 -
Test Method	KDB789033 D02, C.2.
TC Version	0.0.1
My Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ac-VHT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5795 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	17.55	dBm	INFO
Ref. Frequency	---	---	5791.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.55 18.75 30
Start [MHz] Stop [MHz]	5745.000 5845.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	2 1500 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth (6dB)	0.500	---	36.3	MHz	PASS

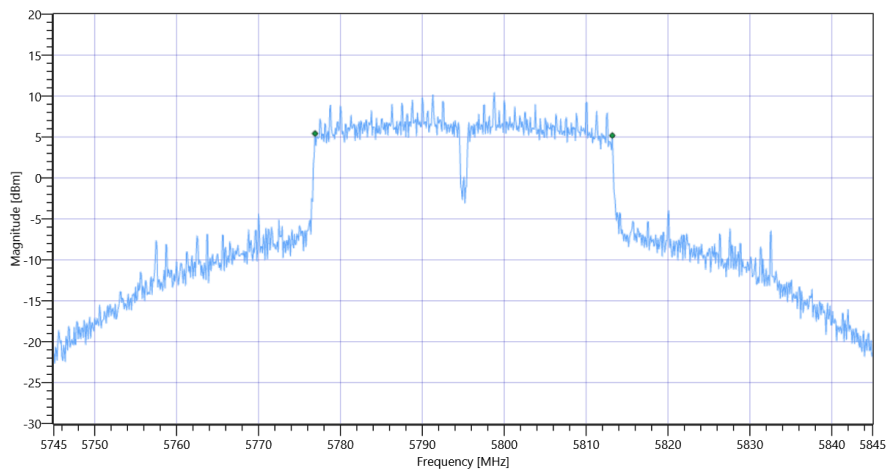

FCC 15.407, ISSED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3

General verdict

PASS

- END OF DOCUMENT -