


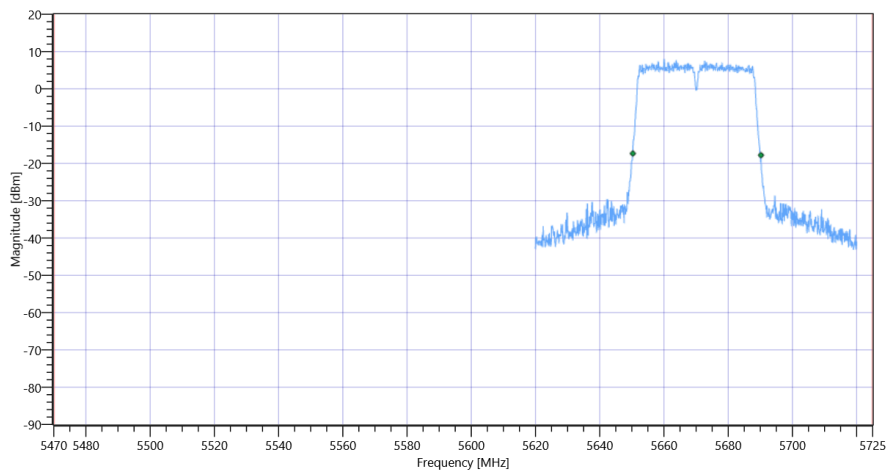

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	18.07.2022 11:10:28
Ambit Temp [°C] Humidity [rel%]	26.6 32
System Version	3.2.0.2
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 5755 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	17.42	dBm	INFO
Ref. Frequency	---	---	5751.000	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.42 18.77 25
Start [MHz] Stop [MHz]	5705.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	61.738	MHz	INFO
T1 99%	5725.000000	---	5724.8302	MHz	DFS required
T2 99%	---	5850.000000	5786.5684	MHz	PASS

Plot: Bandwidth only

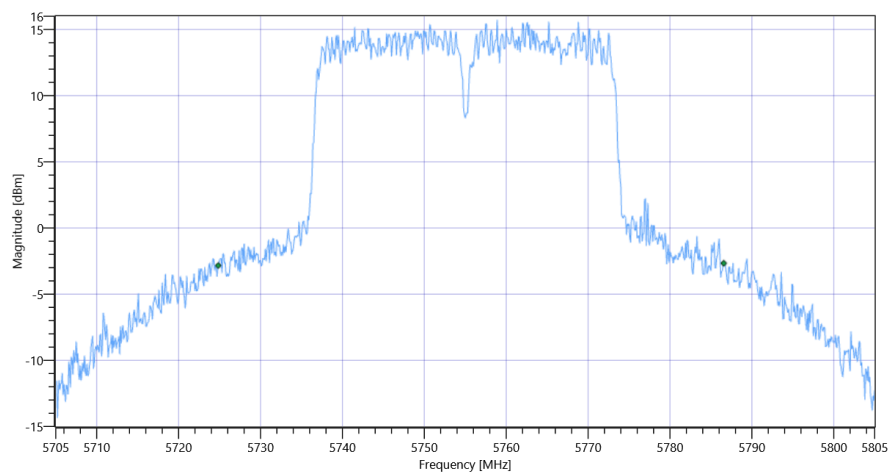

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3 99PCT


Plot: Bandwidth within Band

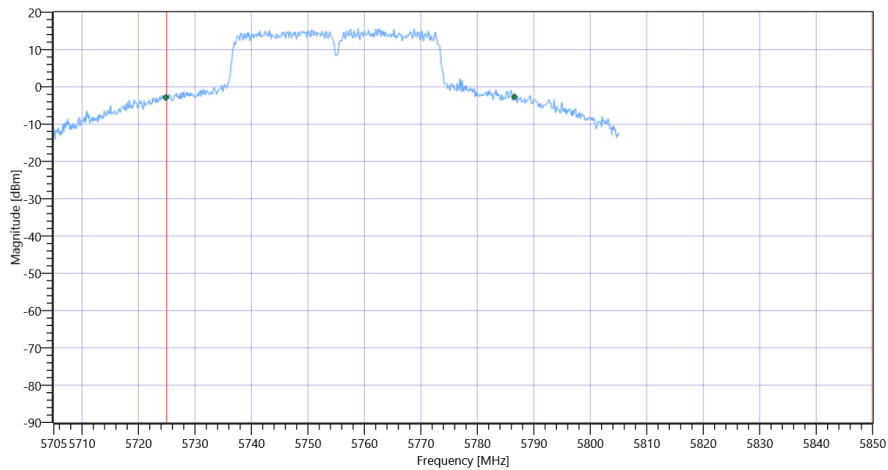

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	96.8	MHz	INFO
T1 26dB	5725.000000	---	5706.6000	MHz	DFS required
T2 26dB	---	5850.000000	5803.4000	MHz	PASS

Plot: Bandwidth only

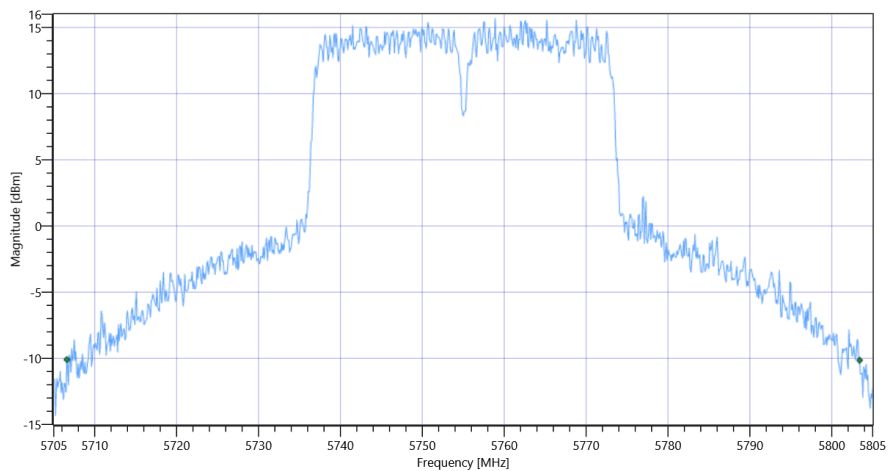

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3 26dB

Plot: Bandwidth within Band

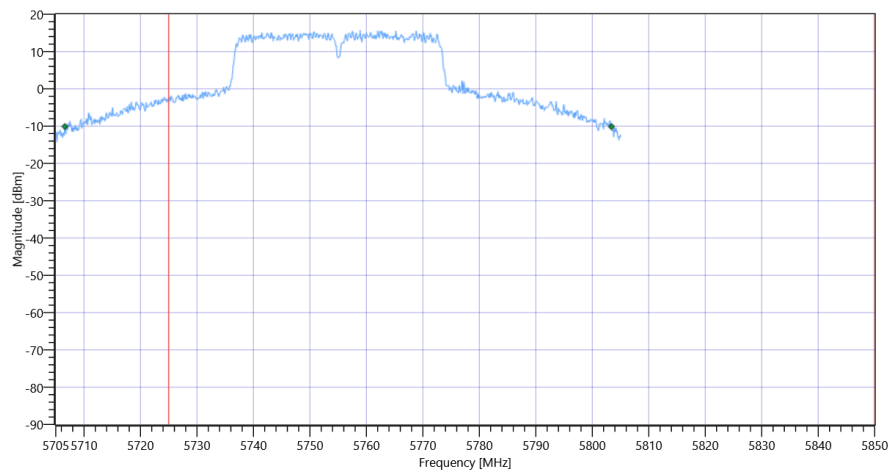

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3

General verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3

Test References

TC Start	18.07.2022 11:22:06
Ambit Temp [°C] Humidity [rel%]	26.8 32
System Version	3.2.0.2
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5795 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	16.80	dBm	INFO
Ref. Frequency	---	---	5803.790	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.80 18.75 25
Start [MHz] Stop [MHz]	5745.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	59.341	MHz	INFO
T1 99%	5725.000000	---	5765.8292	MHz	PASS
T2 99%	---	5850.000000	5825.1698	MHz	PASS

Plot: Bandwidth only

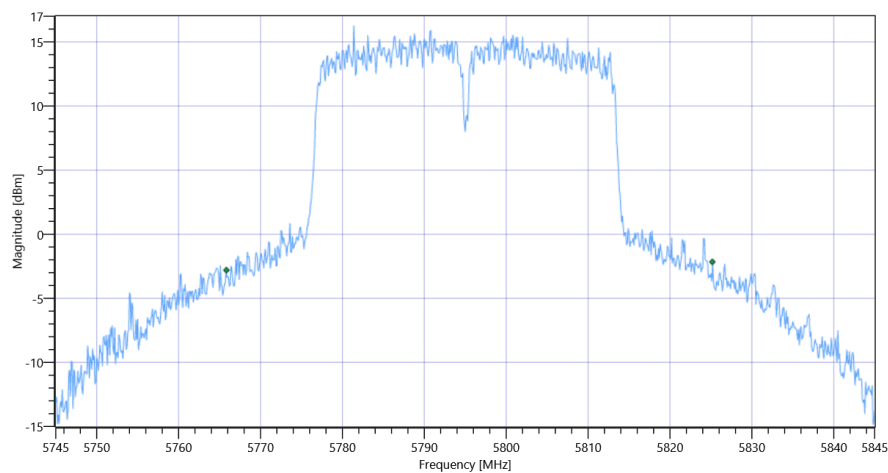

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3 99PCT


Plot: Bandwidth within Band

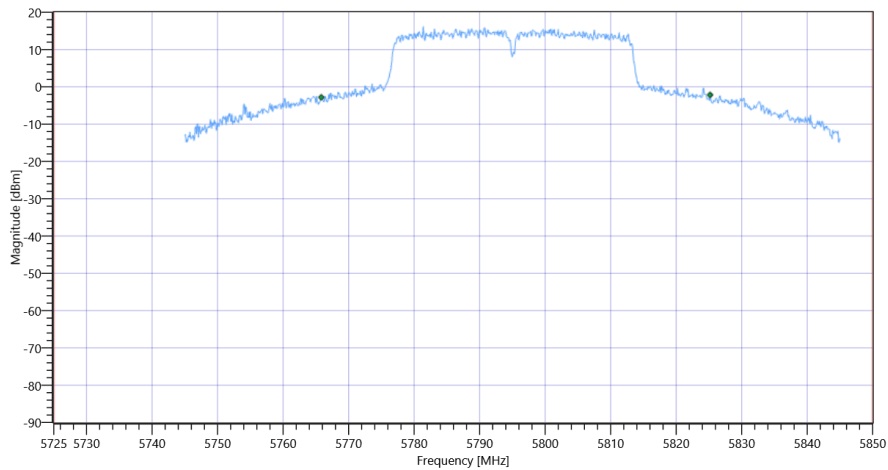

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	93.5	MHz	INFO
T1 26dB	5725.000000	---	5748.9000	MHz	PASS
T2 26dB	---	5850.000000	5842.4000	MHz	PASS

Plot: Bandwidth only

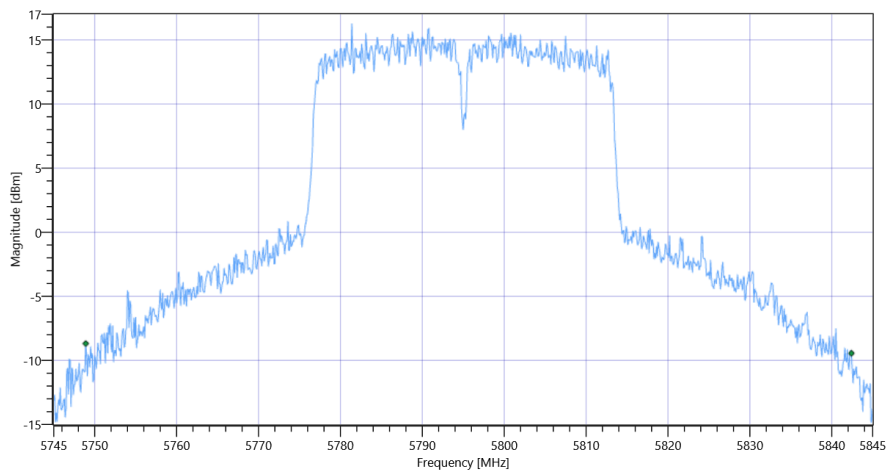

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3 26dB

Plot: Bandwidth within Band

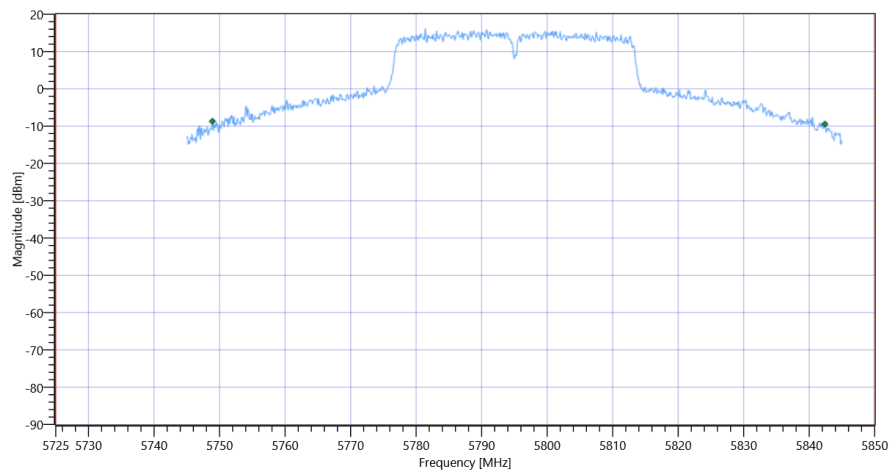

FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

Test References

TC Start	18.07.2022 08:56:40
Ambit Temp [°C] Humidity [rel%]	23.9 37
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5190 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.84	dBm	INFO
Ref. Frequency	---	---	5191.800	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

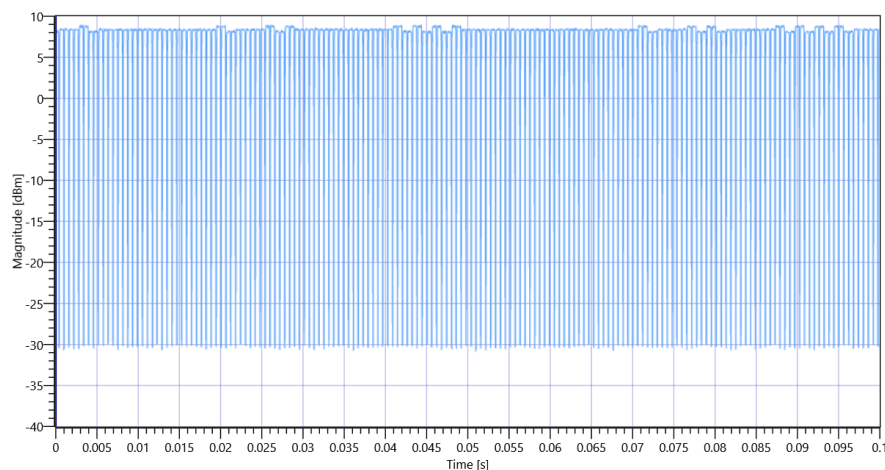


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 5190 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	39.92	MHz	INFO
T1 26dB	---	---	5170.0800	MHz	INFO
T2 26dB	---	---	5210.0000	MHz	INFO

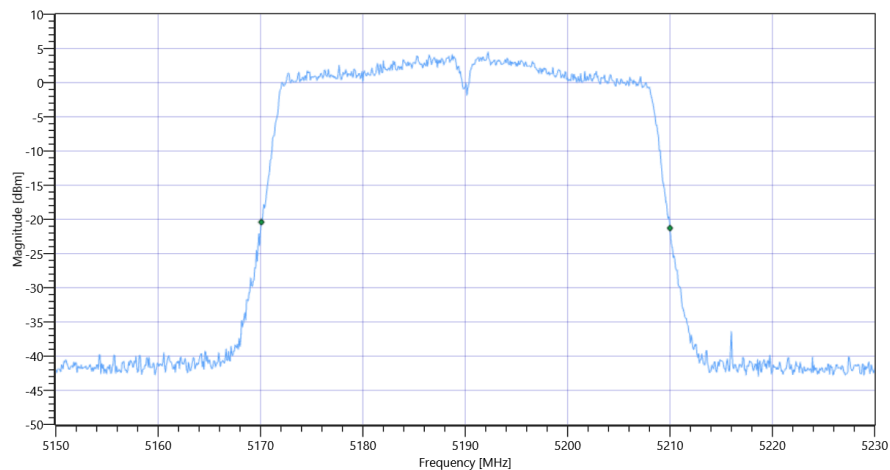

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.84 17.95 20
Start [MHz] Stop [MHz]	5150.000 5230.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	12.03	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	13.28	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27.01	13.28	dBm	not applicable

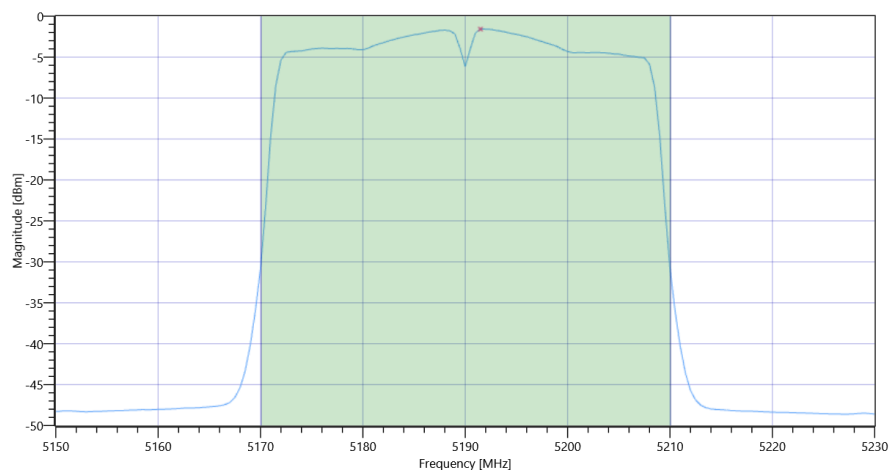

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-1.58	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	-0.33	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

Test References

TC Start	18.07.2022 09:03:29
Ambit Temp [°C] Humidity [rel%]	24.1 36
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5230 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.25	dBm	INFO
Ref. Frequency	---	---	5233.800	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

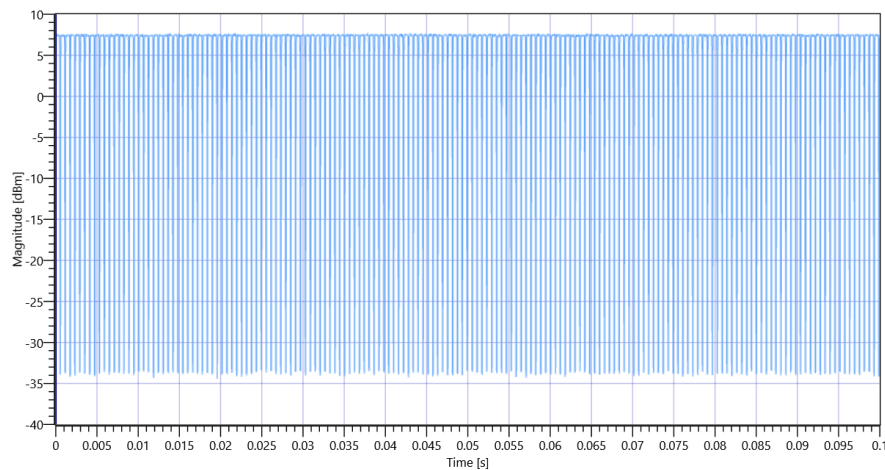


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 5230 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	40.08	MHz	INFO
T1 26dB	---	---	5209.9200	MHz	INFO
T2 26dB	---	---	5250.0000	MHz	INFO

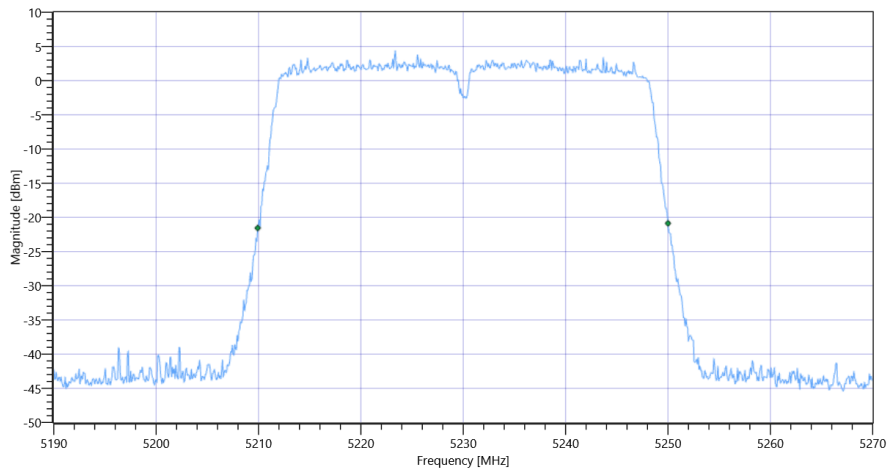

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.25 18.37 15
Start [MHz] Stop [MHz]	5190.000 5270.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	12.08	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	13.33	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27.03	13.33	dBm	not applicable

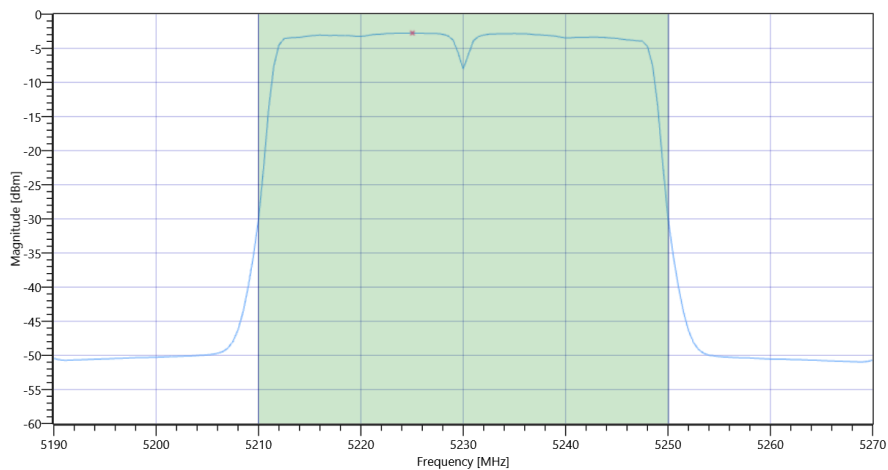

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.76	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	-1.51	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References

TC Start	18.07.2022 09:10:38
Ambit Temp [°C] Humidity [rel%]	24.3 36
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2A

Add. Information

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5310
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5270 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.41	dBm	INFO
Ref. Frequency	---	---	5275.990	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

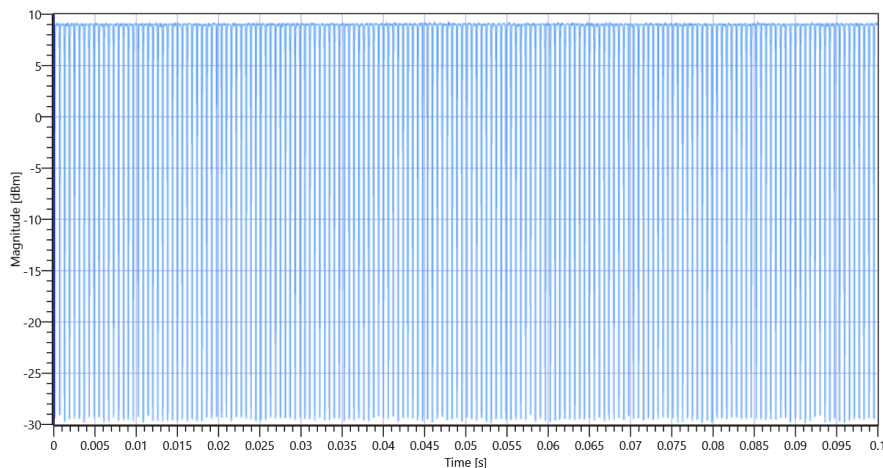


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A 5270 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	40.24	MHz	INFO
T1 26dB	---	---	5250.0000	MHz	INFO
T2 26dB	---	---	5290.2400	MHz	INFO

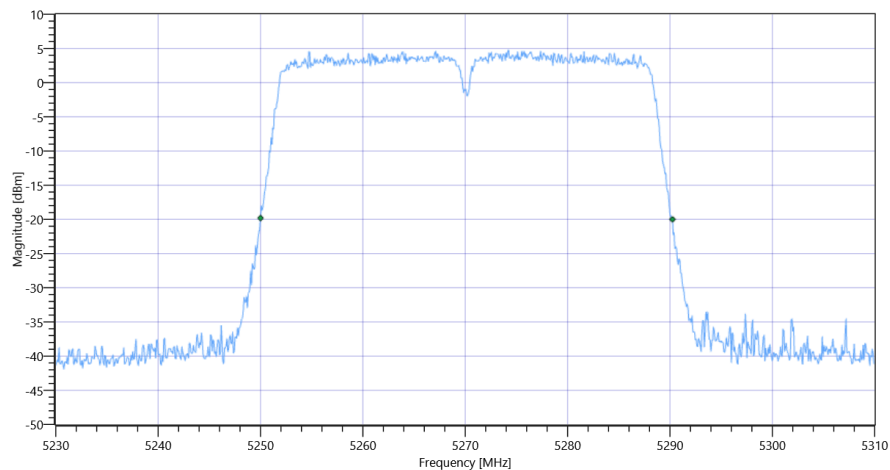

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.41 18.75 15
Start [MHz] Stop [MHz]	5230.000 5310.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	13.59	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	14.84	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27.05	14.84	dBm	PASS

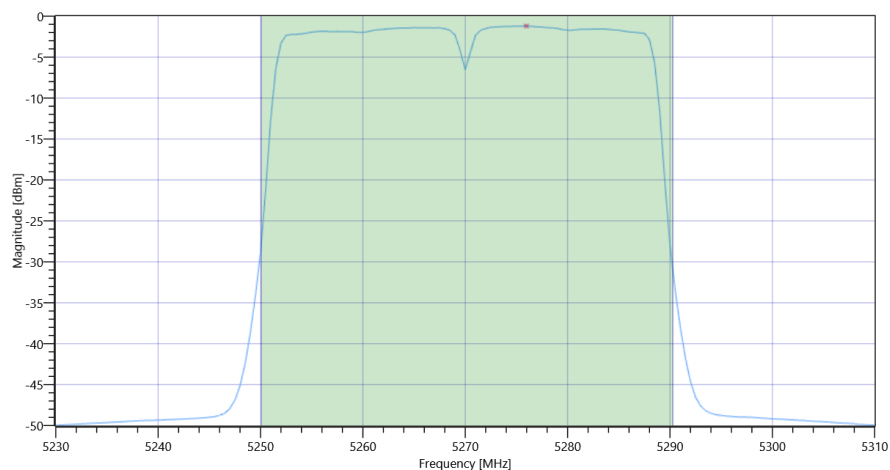

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-1.2	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	0.05	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References

TC Start	18.07.2022 09:16:53
Ambit Temp [°C] Humidity [rel%]	24.4 35
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5310
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5310 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.03	dBm	INFO
Ref. Frequency	---	---	5312.600	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

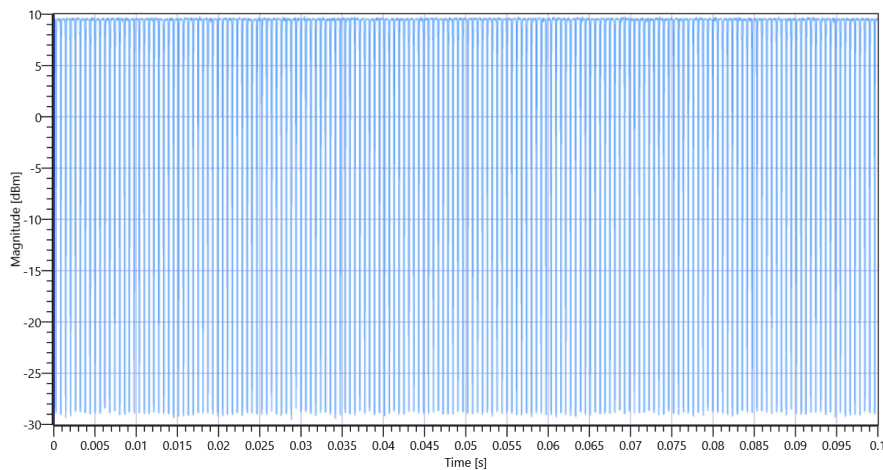


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A 5310 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	39.84	MHz	INFO
T1 26dB	---	---	5290.0800	MHz	INFO
T2 26dB	---	---	5329.9200	MHz	INFO

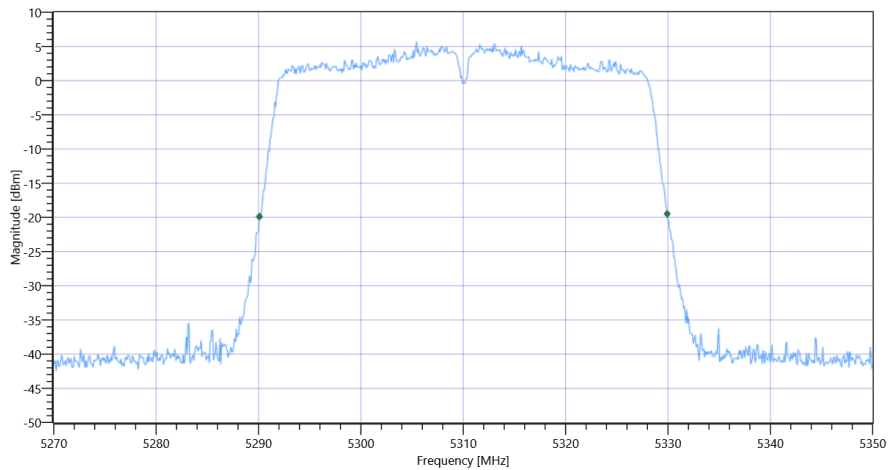

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.03 18.4 20
Start [MHz] Stop [MHz]	5270.000 5350.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	13.33	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	14.58	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27	14.58	dBm	PASS

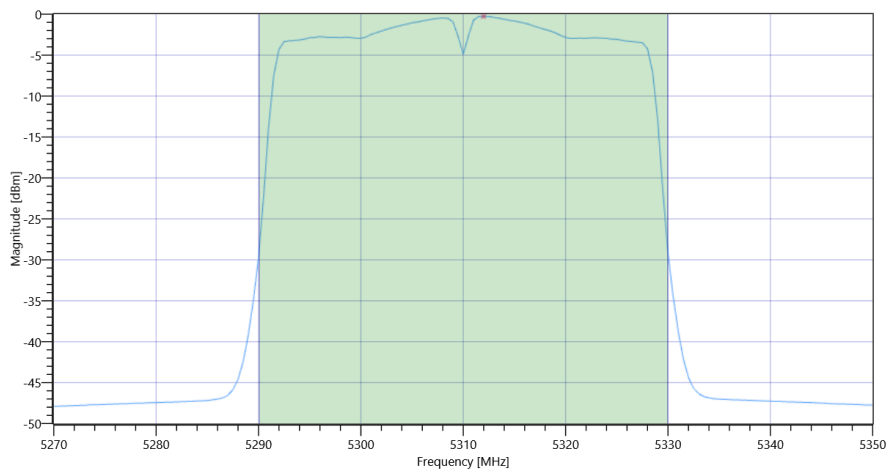

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.26	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	0.99	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References

TC Start	18.07.2022 09:22:51
Ambit Temp [°C] Humidity [rel%]	24.6 35
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C

Add. Information

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5510 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	9.61	dBm	INFO
Ref. Frequency	---	---	5508.400	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

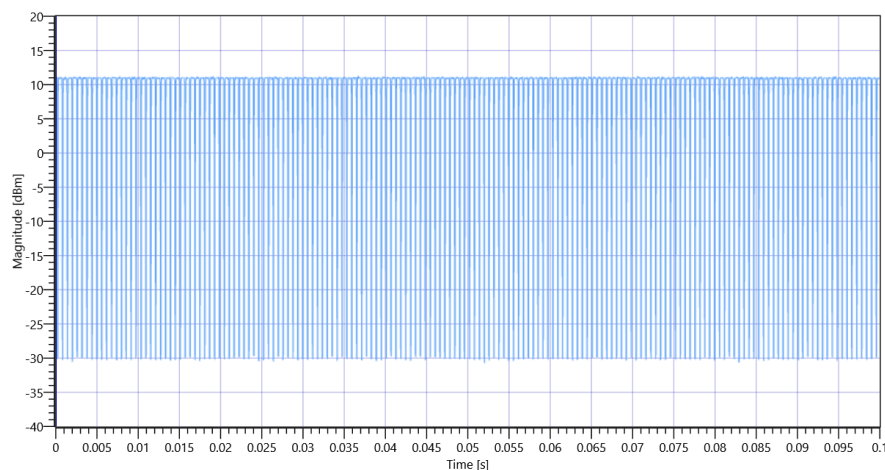


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5510 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5490.0800	MHz	INFO
T2 26dB	---	---	5530.0800	MHz	INFO

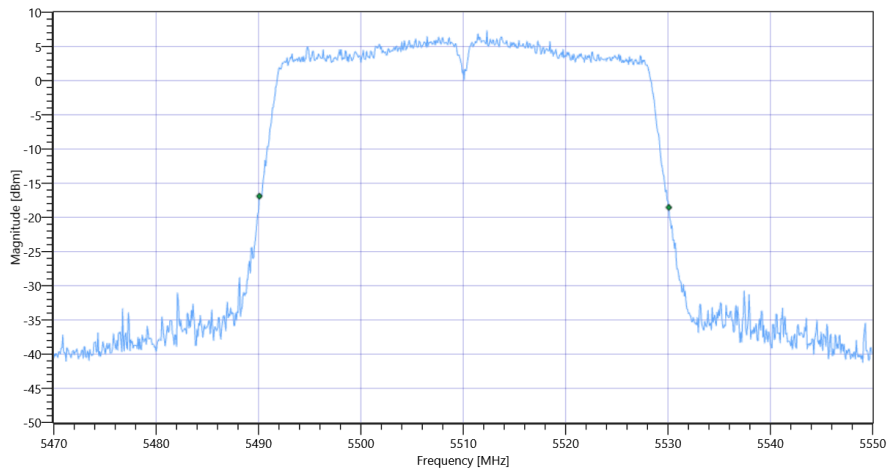

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.61 18.49 20
Start [MHz] Stop [MHz]	5470.000 5550.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	14.61	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	15.86	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27.02	15.86	dBm	PASS

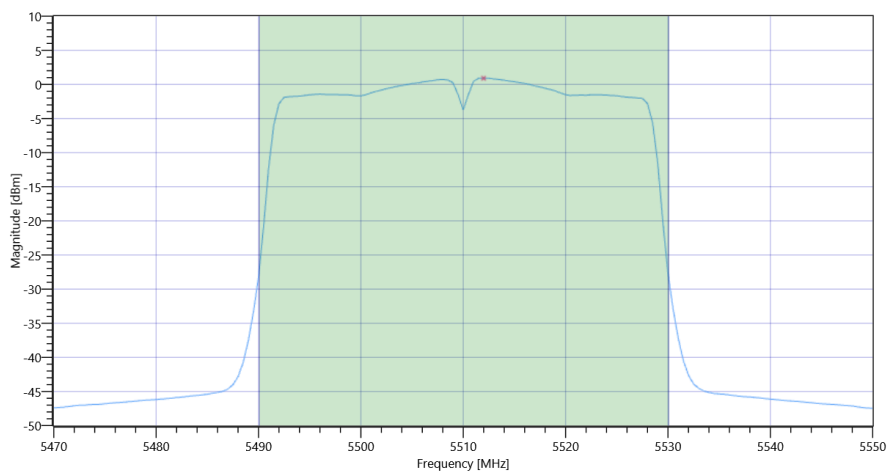

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	0.91	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	2.16	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References

TC Start	18.07.2022 09:29:52
Ambit Temp [°C] Humidity [rel%]	24.7 35
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	True Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5590 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.56	dBm	INFO
Ref. Frequency	---	---	5598.990	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:166					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

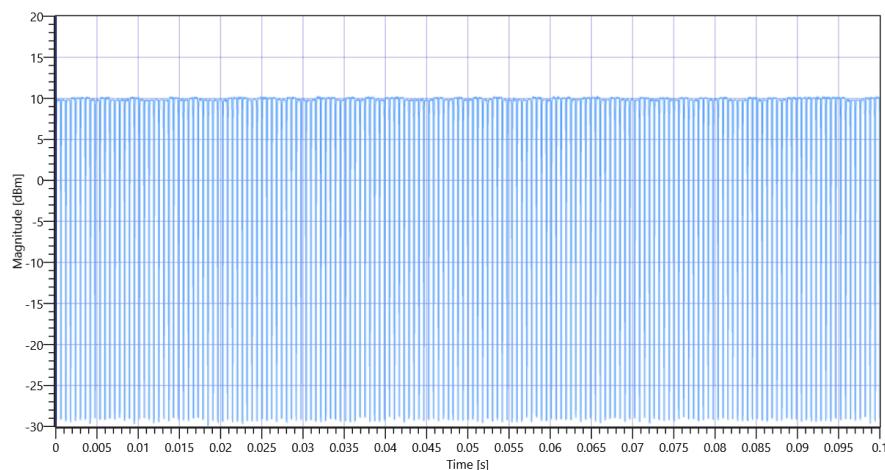


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5590 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	40.08	MHz	INFO
T1 26dB	---	---	5570.0000	MHz	INFO
T2 26dB	---	---	5610.0800	MHz	INFO

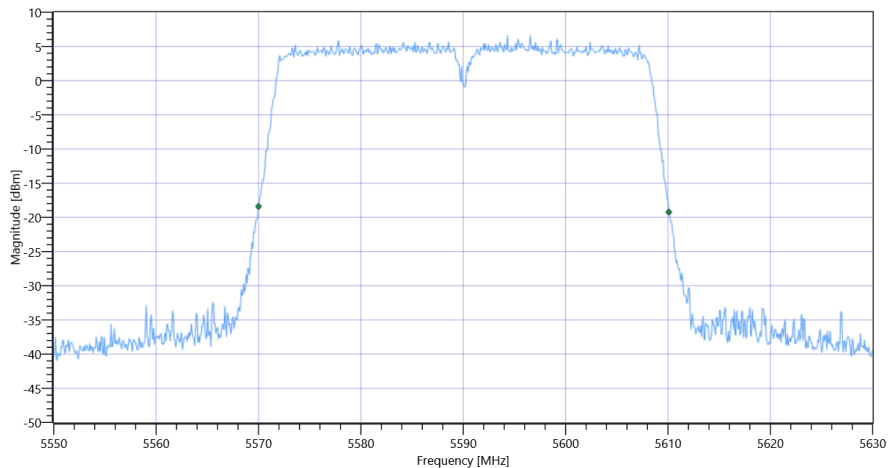

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.56 19.02 20
Start [MHz] Stop [MHz]	5550.000 5630.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	14.7	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	15.95	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27.03	15.95	dBm	PASS

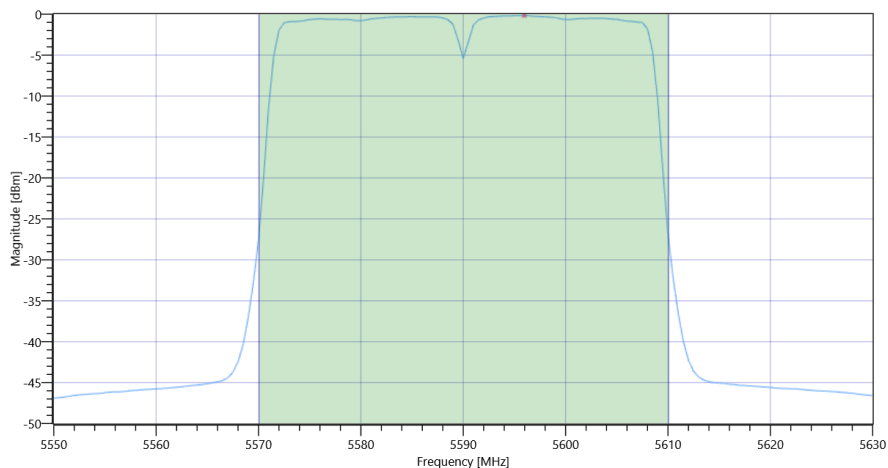

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.17	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	1.08	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References

TC Start	18.07.2022 09:35:13
Ambit Temp [°C] Humidity [rel%]	24.9 35
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	True Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5670 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.36	dBm	INFO
Ref. Frequency	---	---	5673.600	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

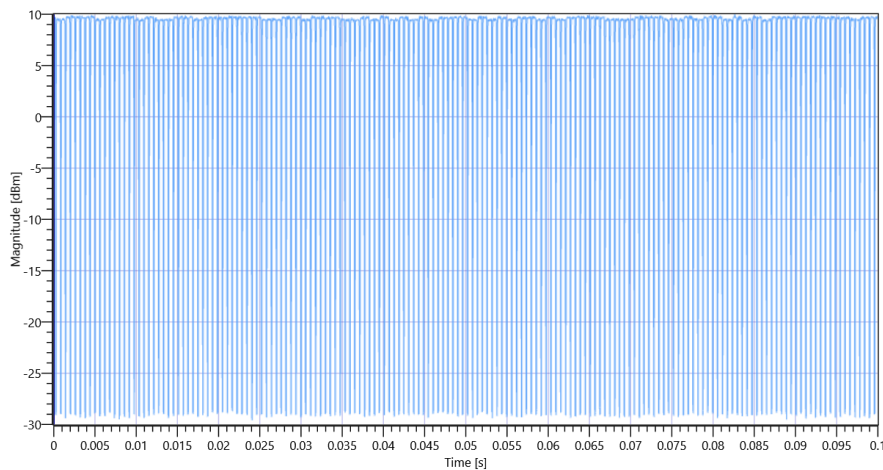


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5670 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	40.32	MHz	INFO
T1 26dB	---	---	5649.9200	MHz	INFO
T2 26dB	---	---	5690.2400	MHz	INFO

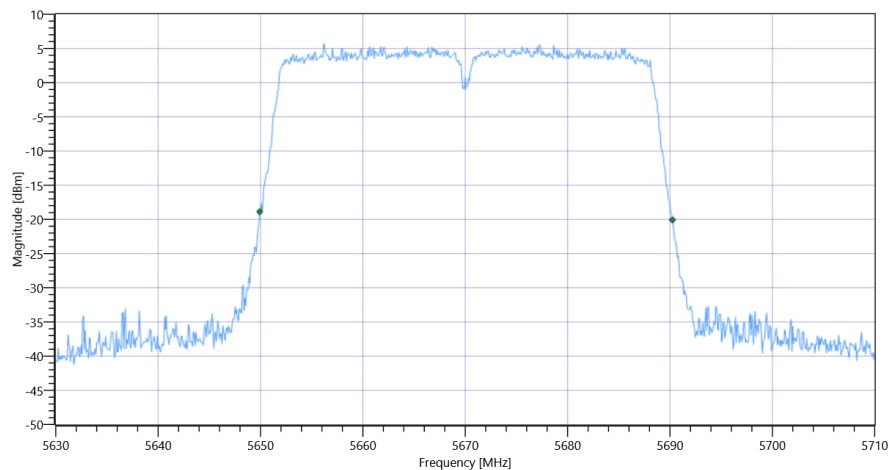

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.36 18.67 20
Start [MHz] Stop [MHz]	5630.000 5710.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	14.33	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	15.58	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27.06	15.58	dBm	PASS

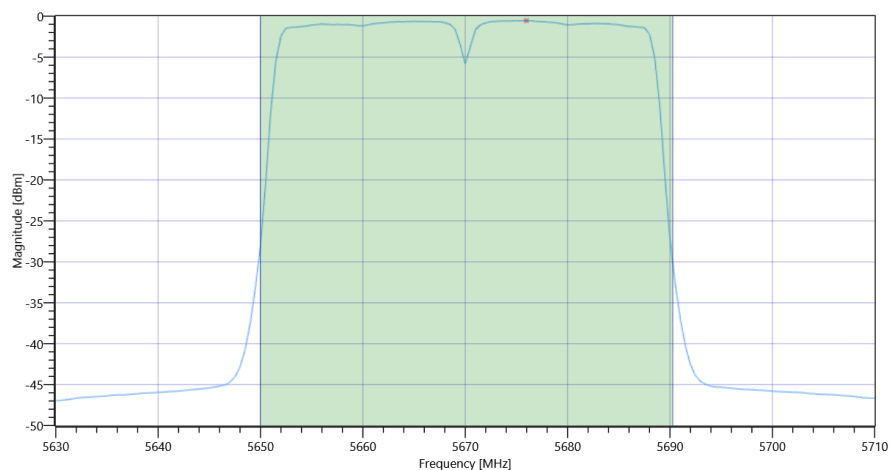

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.55	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	0.7	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

Test References

TC Start	18.07.2022 09:40:50
Ambit Temp [°C] Humidity [rel%]	25.0 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5755 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	17.93	dBm	INFO
Ref. Frequency	---	---	5749.610	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

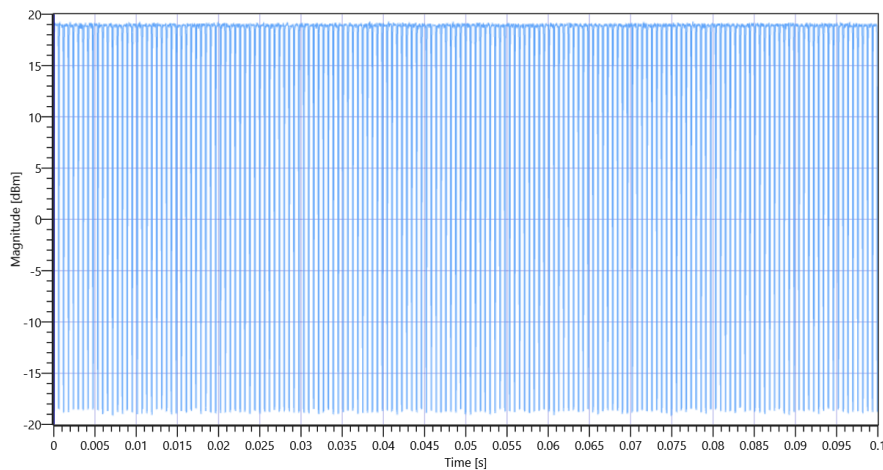


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 5755 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	80	MHz	INFO
T1 26dB	---	---	5715.0000	MHz	INFO
T2 26dB	---	---	5795.0000	MHz	INFO

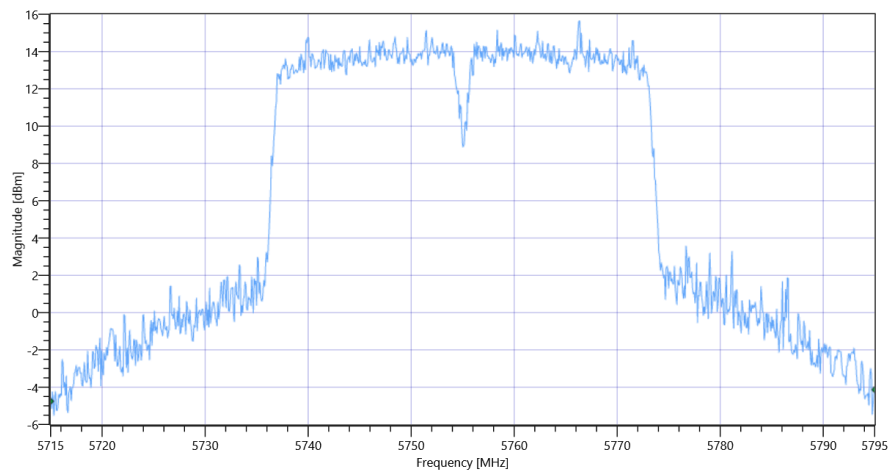

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.93 18.77 30
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	23.72	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	24.97	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	30.03	24.97	dBm	not applicable

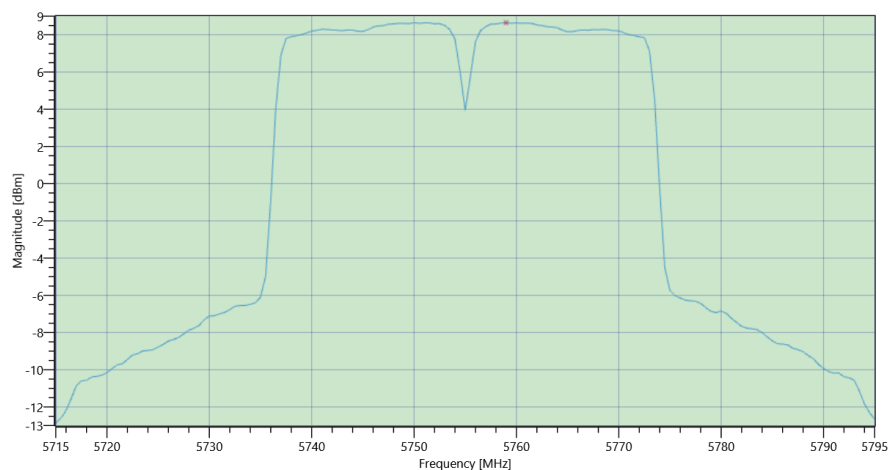

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.93 18.77 30
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	5.74	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	30	6.99	dBm/0.5MHz	PASS

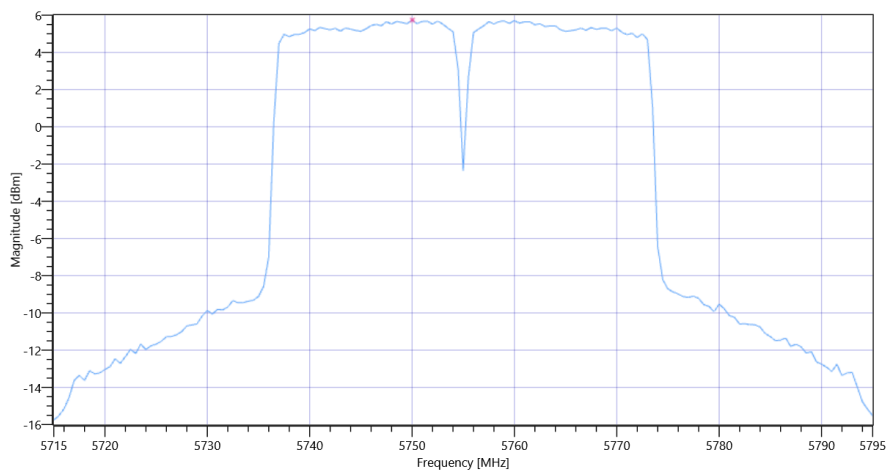

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 PSD UNII-3

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

Test References

TC Start	18.07.2022 09:49:27
Ambit Temp [°C] Humidity [rel%]	25.2 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5795 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	18.12	dBm	INFO
Ref. Frequency	---	---	5803.190	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:166					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

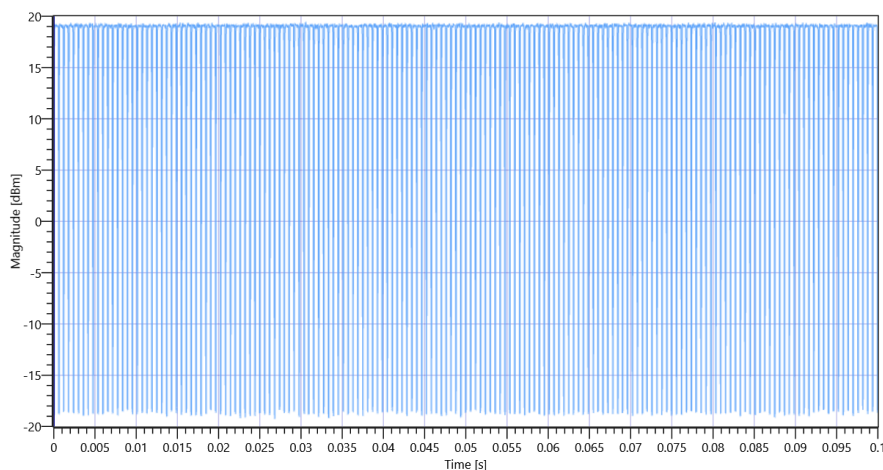


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 5795 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	80	MHz	INFO
T1 26dB	---	---	5755.0000	MHz	INFO
T2 26dB	---	---	5835.0000	MHz	INFO

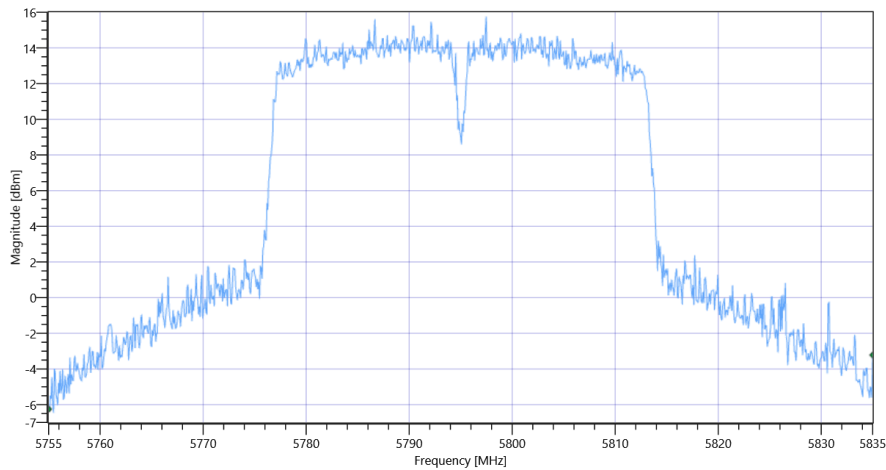

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	30.12 18.75 30
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	23.75	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	25	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	30.03	25	dBm	not applicable

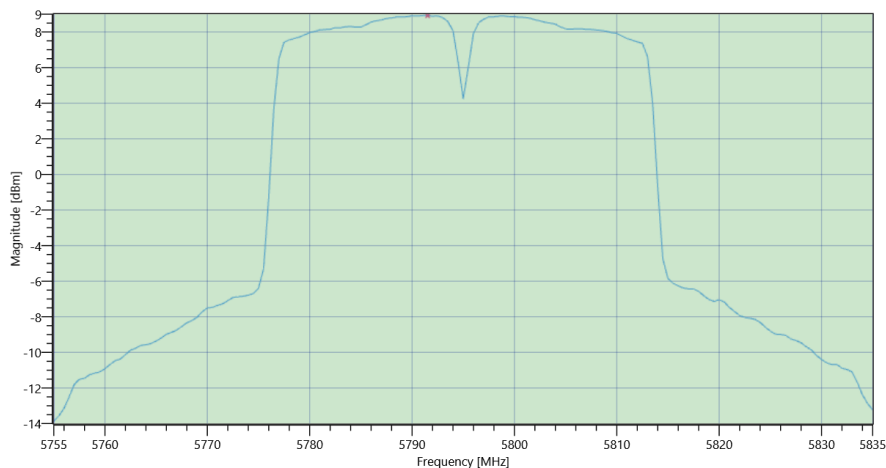

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	30.12 18.75 30
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	5.96	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	30	7.21	dBm/0.5MHz	PASS

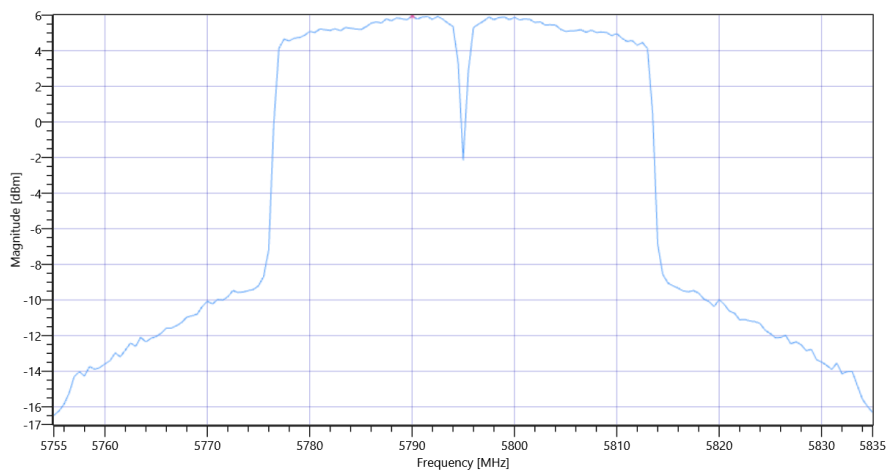

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 PSD UNII-3

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

Test References

TC Start	18.07.2022 10:00:11
Ambit Temp [°C] Humidity [rel%]	25.4 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5190 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.41	dBm	INFO
Ref. Frequency	---	---	5194.000	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

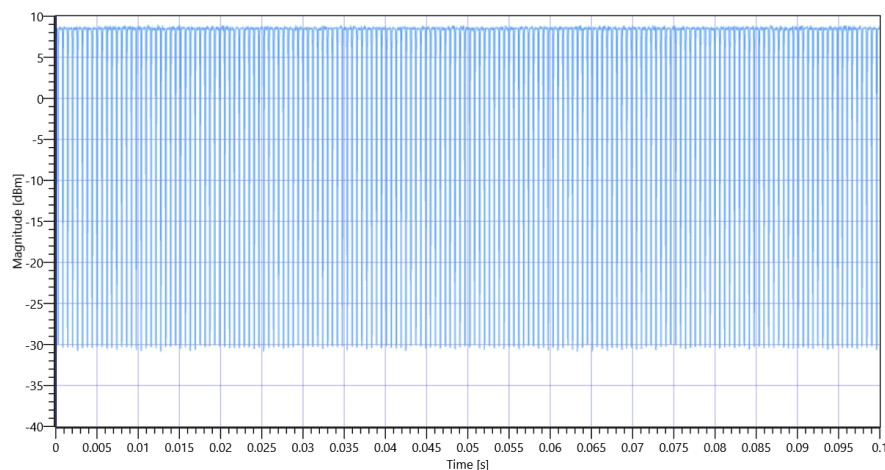


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 5190 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	39.36	MHz	INFO
T1 26dB	---	---	5170.4000	MHz	INFO
T2 26dB	---	---	5209.7600	MHz	INFO

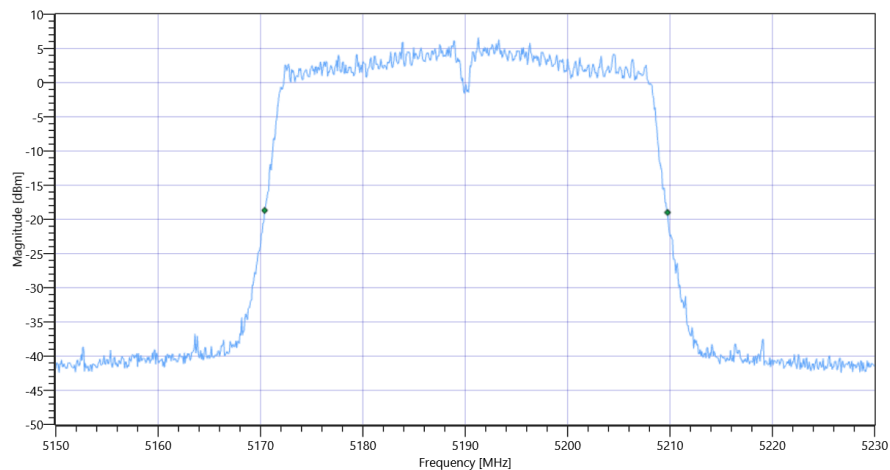

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.41 17.95 20
Start [MHz] Stop [MHz]	5150.000 5230.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	12.15	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	13.4	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	26.95	13.4	dBm	not applicable

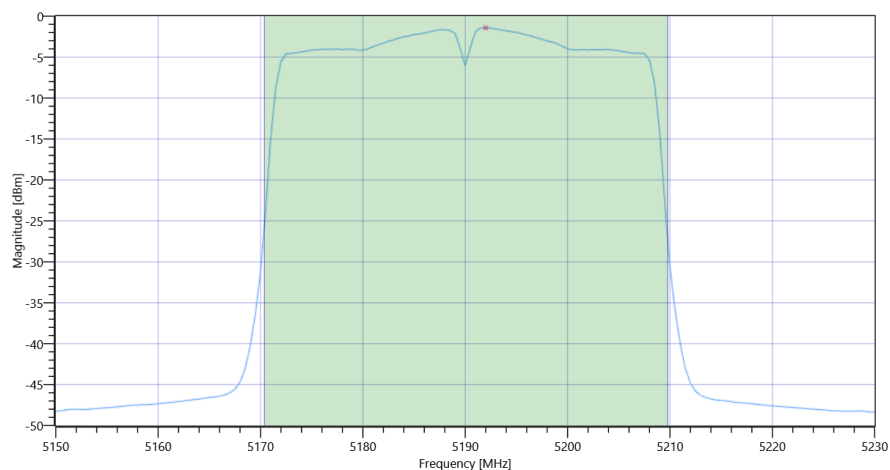

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-1.43	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	-0.18	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

Test References

TC Start	18.07.2022 10:09:05
Ambit Temp [°C] Humidity [rel%]	25.6 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5230 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.25	dBm	INFO
Ref. Frequency	---	---	5235.790	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

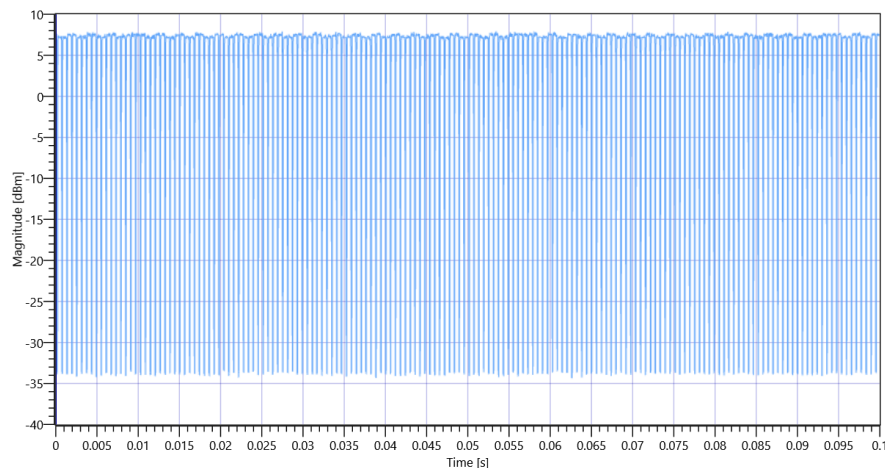


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 5230 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5210.2400	MHz	INFO
T2 26dB	---	---	5250.2400	MHz	INFO

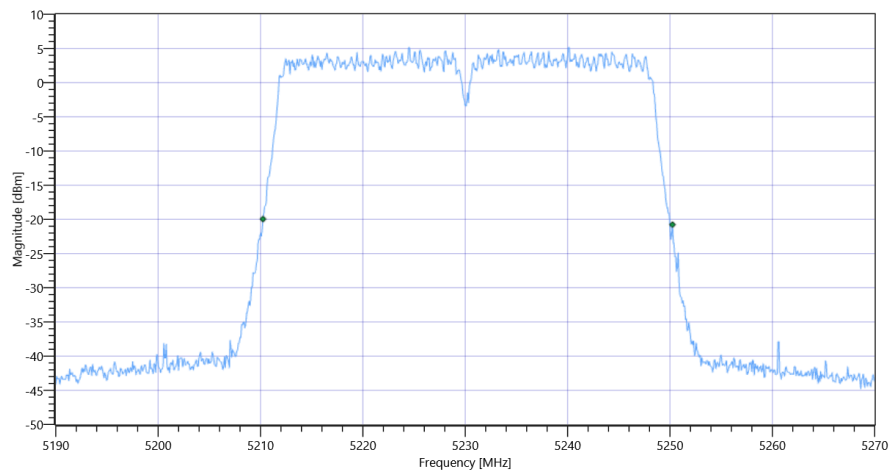

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.25 18.37 15
Start [MHz] Stop [MHz]	5190.000 5270.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	12.11	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	13.36	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27.02	13.36	dBm	not applicable

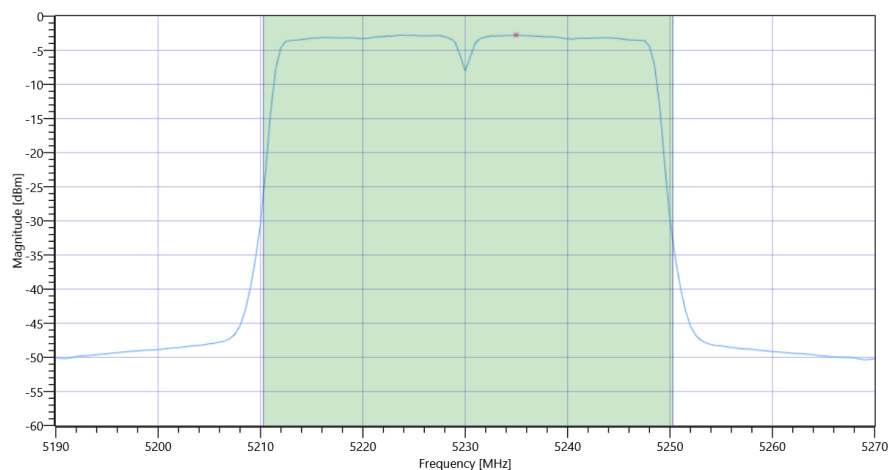

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.77	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	-1.52	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References

TC Start	18.07.2022 10:35:28
Ambit Temp [°C] Humidity [rel%]	26.0 32
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5310
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5270 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.46	dBm	INFO
Ref. Frequency	---	---	5273.800	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

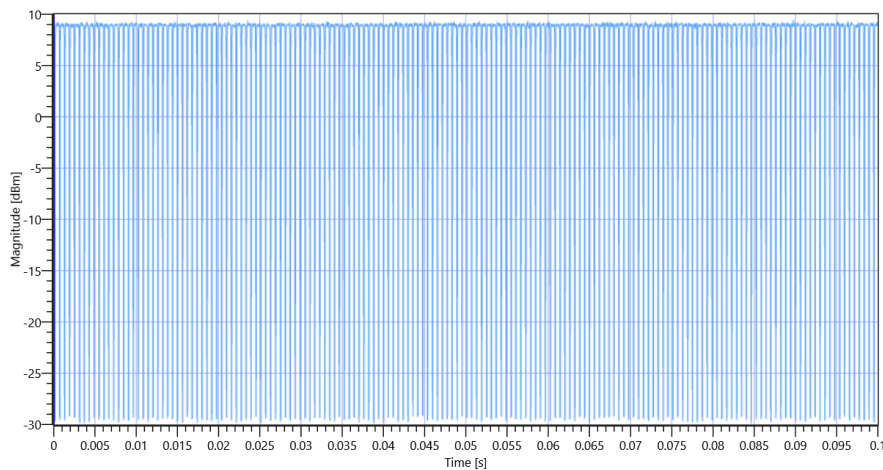


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A 5270 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	39.92	MHz	INFO
T1 26dB	---	---	5250.1600	MHz	INFO
T2 26dB	---	---	5290.0800	MHz	INFO

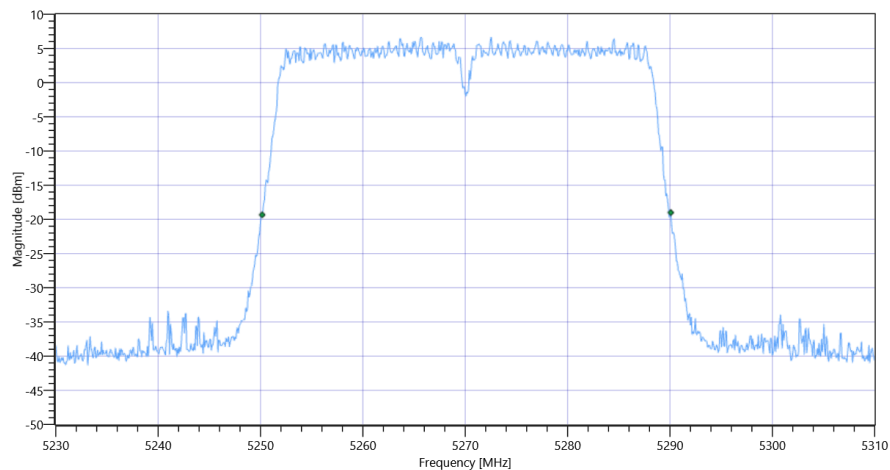

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.46 18.75 20
Start [MHz] Stop [MHz]	5230.000 5310.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	13.57	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	14.82	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27.01	14.82	dBm	PASS

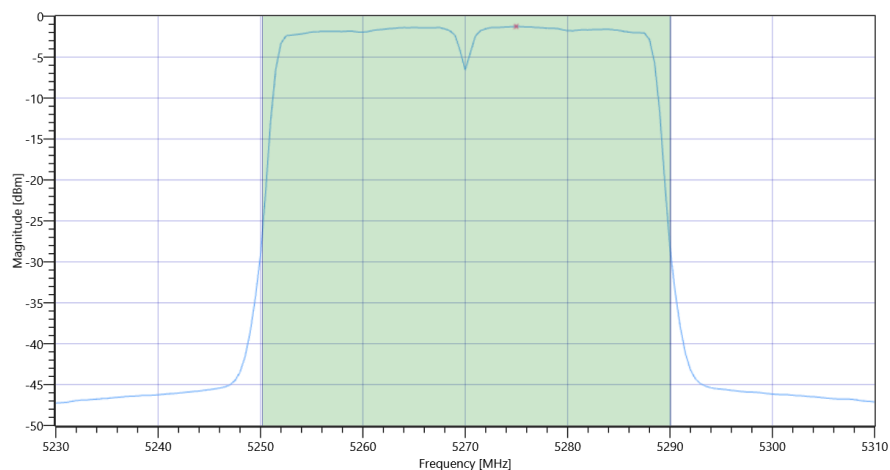

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-1.25	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	0	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References

TC Start	18.07.2022 10:41:22
Ambit Temp [°C] Humidity [rel%]	26.1 32
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5310
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5310 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.81	dBm	INFO
Ref. Frequency	---	---	5312.000	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

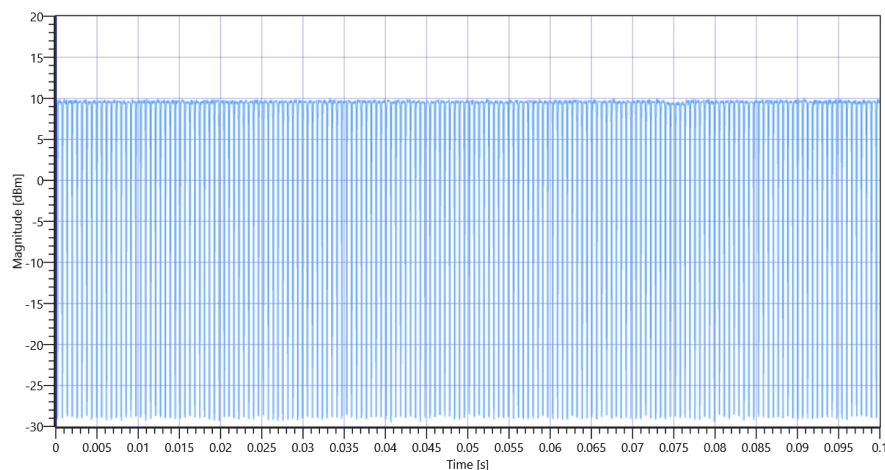


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A 5310 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	39.52	MHz	INFO
T1 26dB	---	---	5290.4000	MHz	INFO
T2 26dB	---	---	5329.9200	MHz	INFO

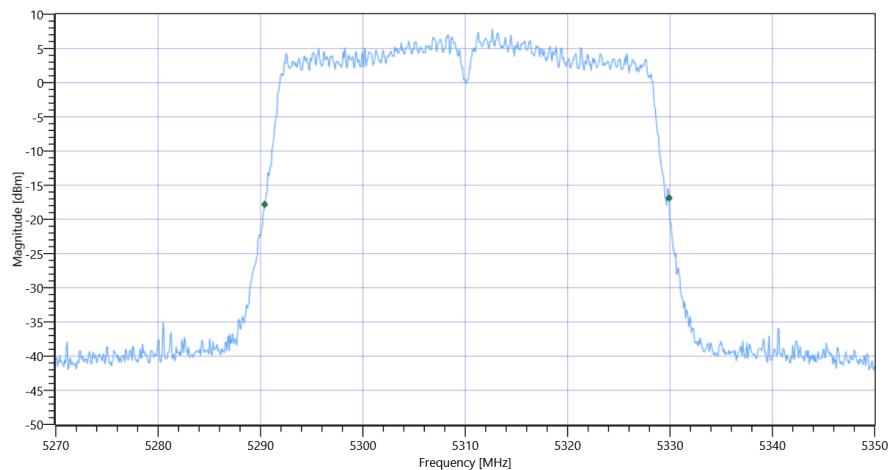

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.81 18.4 20
Start [MHz] Stop [MHz]	5270.000 5350.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	13.19	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	14.44	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	26.97	14.44	dBm	PASS

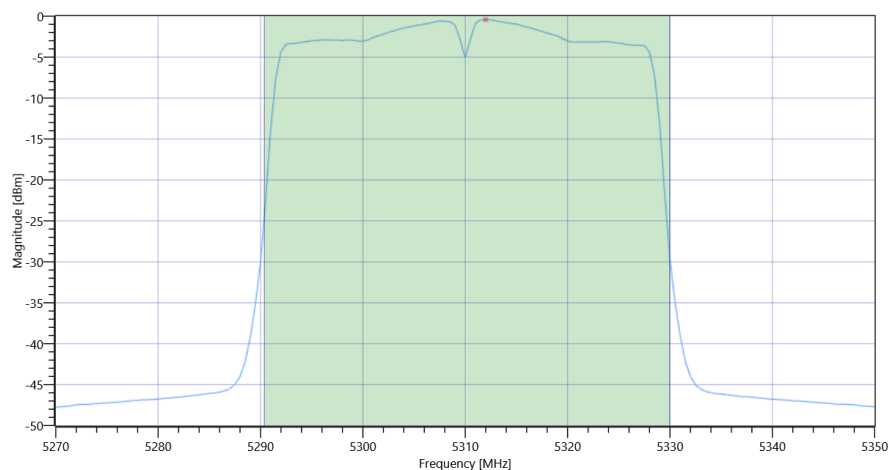

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.42	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	0.83	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References

TC Start	18.07.2022 10:47:23
Ambit Temp [°C] Humidity [rel%]	26.2 32
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5510 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	10.22	dBm	INFO
Ref. Frequency	---	---	5514.400	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

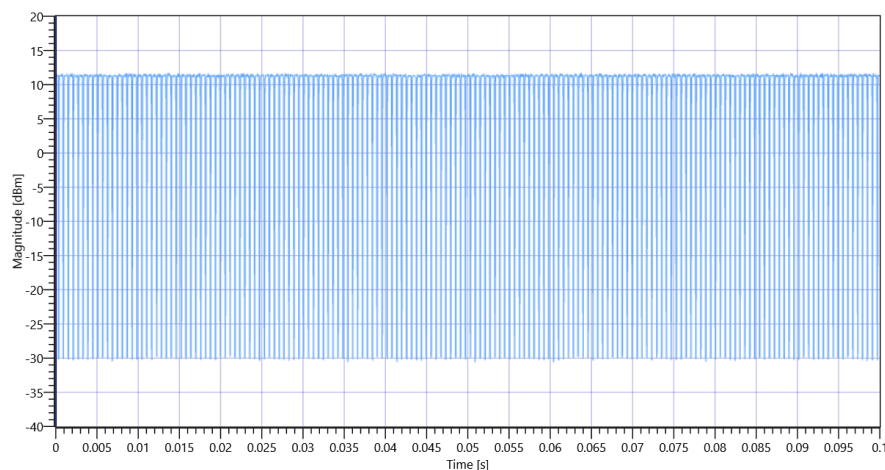


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5510 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	39.28	MHz	INFO
T1 26dB	---	---	5490.4000	MHz	INFO
T2 26dB	---	---	5529.6800	MHz	INFO

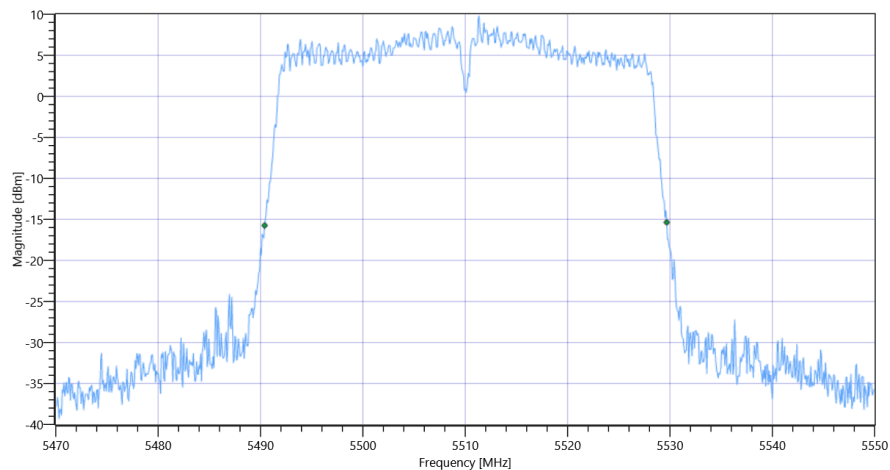

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	22.22 18.49 20
Start [MHz] Stop [MHz]	5470.000 5550.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	14.92	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	16.17	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	26.94	16.17	dBm	PASS

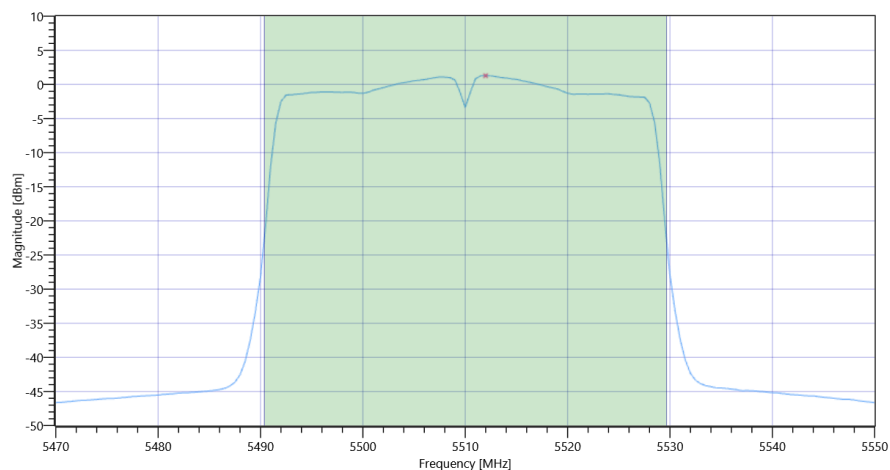

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	1.28	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	2.53	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	18.07.2022 10:52:44
Ambit Temp [°C] Humidity [rel%]	26.3 32
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	True Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70	
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 5590 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	9.83	dBm	INFO
Ref. Frequency	---	---	5600.990	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

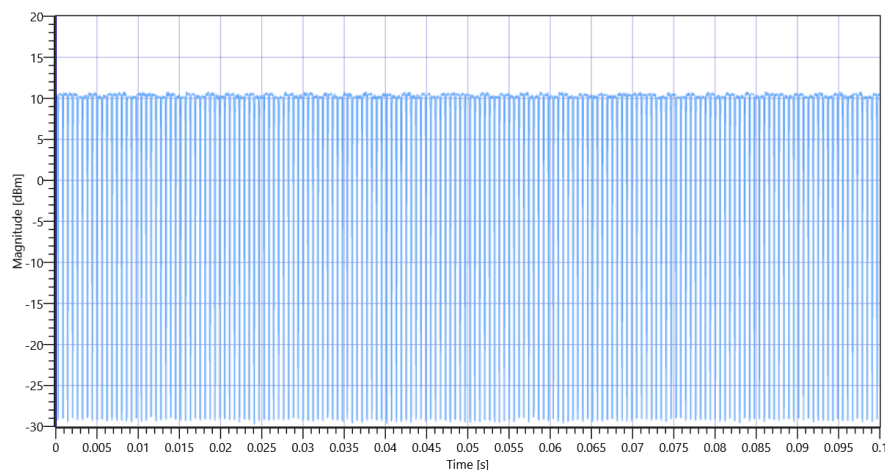


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5590 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	39.84	MHz	INFO
T1 26dB	---	---	5570.2400	MHz	INFO
T2 26dB	---	---	5610.0800	MHz	INFO

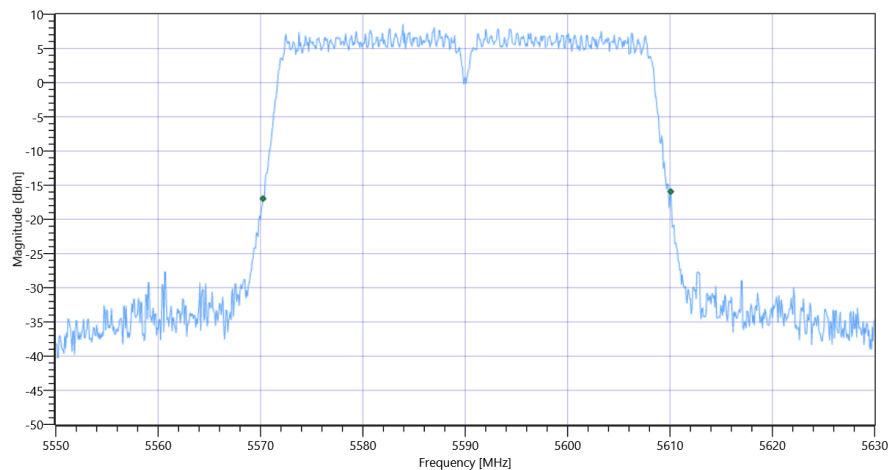

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.83 19.02 20
Start [MHz] Stop [MHz]	5550.000 5630.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	15.07	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	16.32	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27	16.32	dBm	PASS

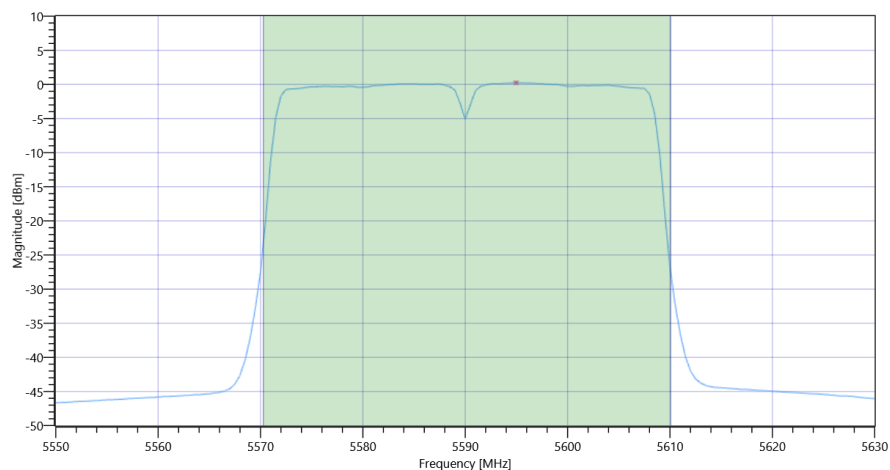

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	0.25	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	1.5	dBm/1MHz	PASS
General verdict			PASS		

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References

TC Start	18.07.2022 10:58:30
Ambit Temp [°C] Humidity [rel%]	26.4 32
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	2
User Interaction	No
Device Class UNII_1	Client

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	True Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1.4
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5670 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	9.00	dBm	INFO
Ref. Frequency	---	---	5668.600	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:167					
Duty Cycle (Burst Ratio) max	---	---	0.792	---	INFO
Duty Cycle max	---	---	1.013	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.75	---	INFO
Duty Cycle min	---	---	1.249	dB	INFO
Max TX Burst Length	---	---	0.475	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.15	ms	INFO

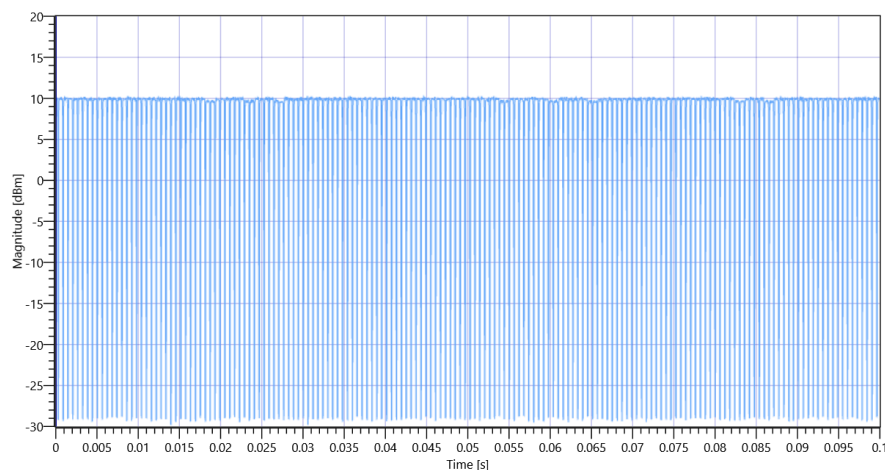


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5670 MHz - DutyCycle

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	39.84	MHz	INFO
T1 26dB	---	---	5650.0800	MHz	INFO
T2 26dB	---	---	5689.9200	MHz	INFO

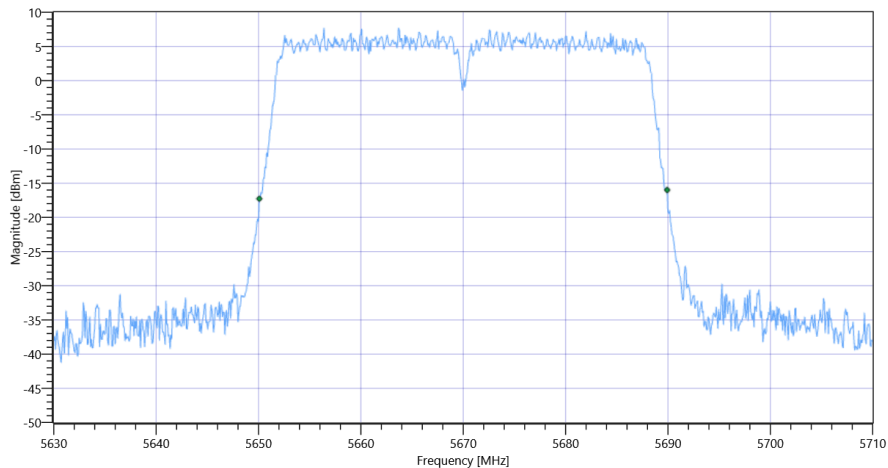

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.00 18.67 20
Start [MHz] Stop [MHz]	5630.000 5710.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	14.56	dBm	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	15.81	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	27	15.81	dBm	PASS

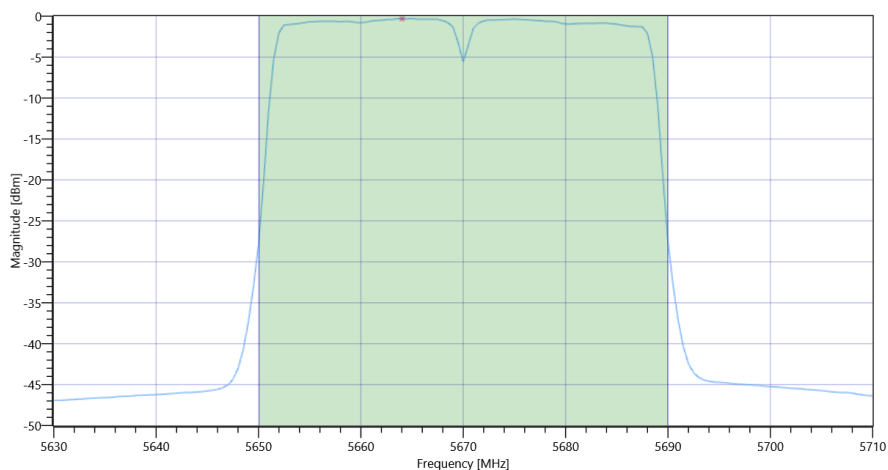

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.32	dBm/1MHz	INFO
Duty Cycle Correction	---	---	1.25	dB	INFO
Power Spectral Density DC corrected	---	11	0.93	dBm/1MHz	PASS
General verdict			PASS		