

Conducted test results

No.23-1-0068401T004a-A6

July 31, 2023

Test Standard(s)	FCC 15.407
	FCC 15.407, ISED RSS247

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized



cn=David Lang, o=cetecom
advanced GmbH,
ou=LNG-230530,
email=david.lang@cetecomadva
nced.com, c=DE
2023.07.31 13:24:38 +02'00'

David Lang
Lab Manager
Radio Labs

Table of Content

# Message with SA scan ~	4
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1	5
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1	9
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1	13
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1	17
# Message with SA scan ~	21
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C	22
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C	26
FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx a mode U-NII-2C	30
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1	32
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1	36
# Message with SA scan ~	40
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1	41
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1	45
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1	49
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1	53
# Message with SA scan ~	57
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A	58
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A	62
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A	67
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A	71
# Message with SA scan ~	76
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A	77
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A	81
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A	86
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A	90
# Message with SA scan ~	95
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A	96
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A	100
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A	105
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A	109
# Message with SA scan ~	114
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C	115
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C	119
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C	124
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C	128
# Message with SA scan ~	133
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C	134
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C	138
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C	143
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C	147

# Message with SA scan ~	152
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C	153
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C	157
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C	162
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C	166
# Message with SA scan ~	171
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3	172
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3	177
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3	181
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3	183
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3	188
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3	192
# Message with SA scan ~	194
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3	195
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3	200
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3	204
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3	206
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3	211
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3	215
# Message with SA scan ~	217
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3	218
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3	223
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3	227
FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3	229
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3	234
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3	238
FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1	240
FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A	244
FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C	248
FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3	252

Message with SA scan ~

References

TC start	11.07.2023 11:12:08
Ambit temp [°C] humidity [rel%]	27.0 46
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA WLAN5Gx ax-HE20 U-NII-1
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 11:12:09
Message	set WLAN5Gx to WLAN5Gx ax-HE20 U-NII-1, Frequency [MHz] 5180 ,

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	11.07.2023 11:12:19
Ambit temp [°C] humidity [rel%]	27.0 46
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5180 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.41	dBm	INFO
Ref. Frequency	---	---	5177.800	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

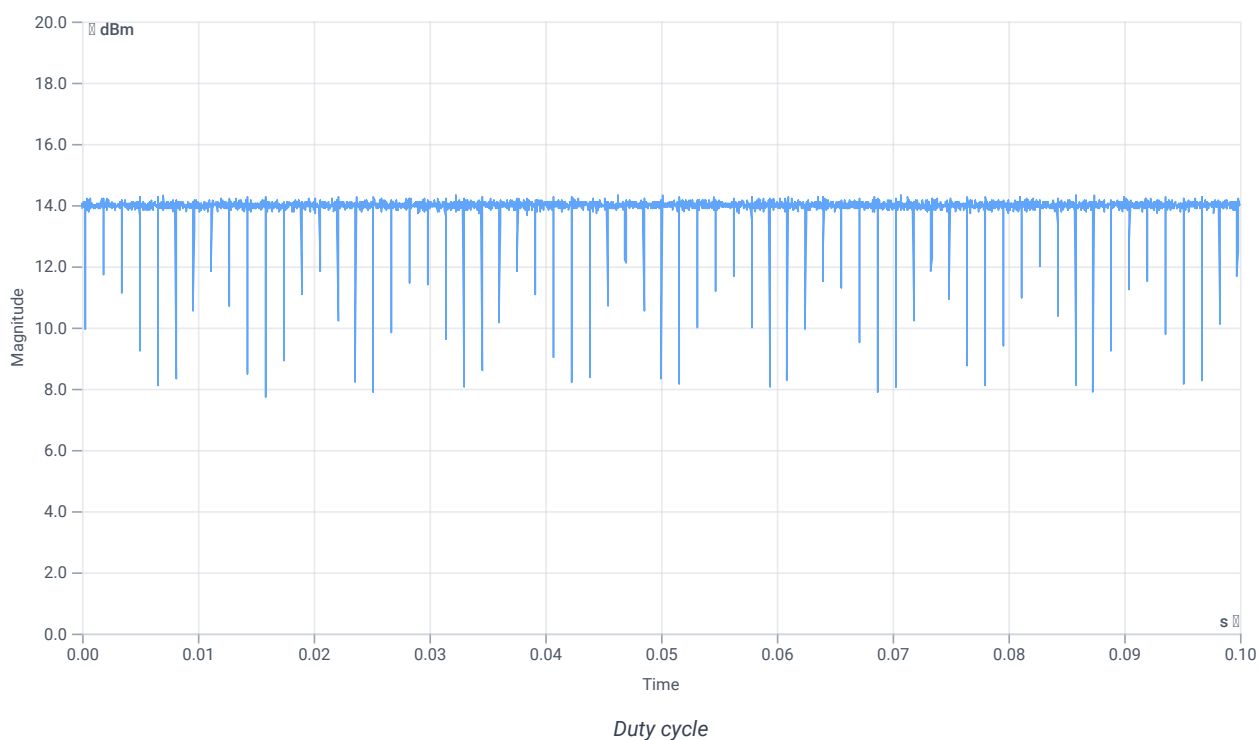

Evaluation Bandwidth

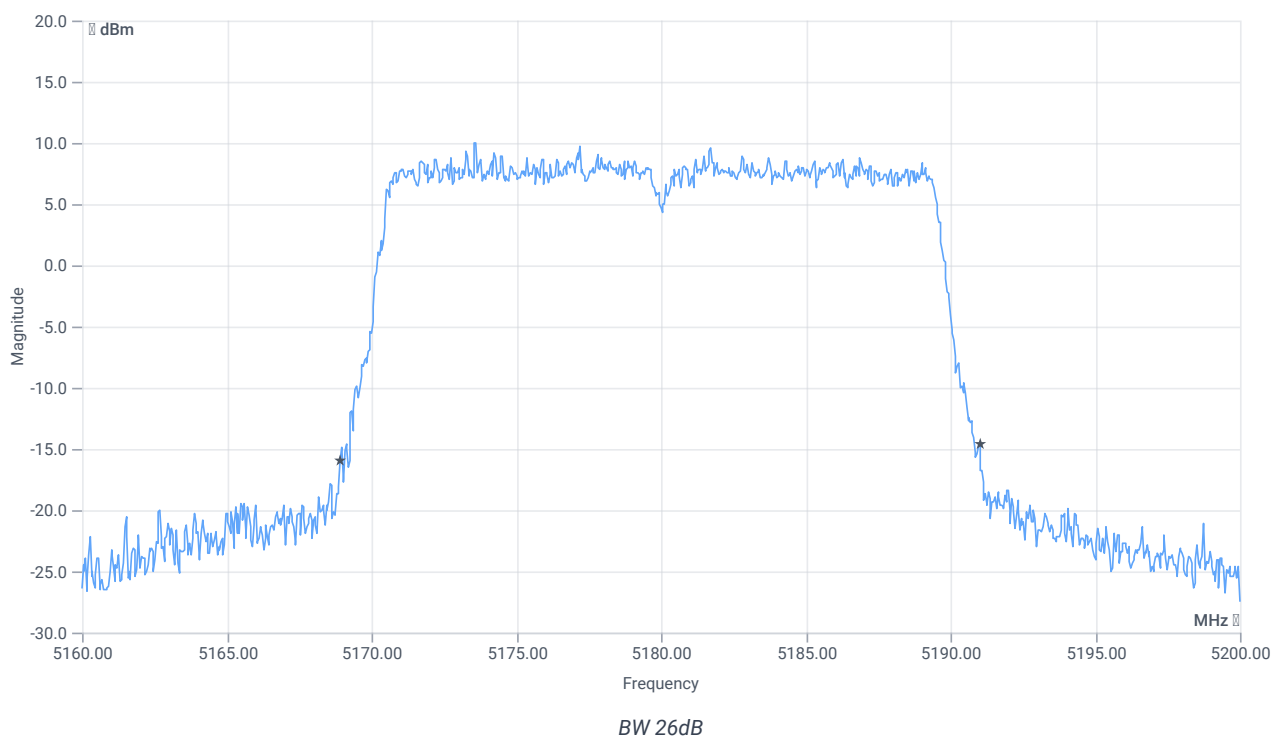


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.08	MHz	INFO
T1 26dB	---	---	5168.9200	MHz	INFO
T2 26dB	---	---	5191.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	26.41 16.39 25
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

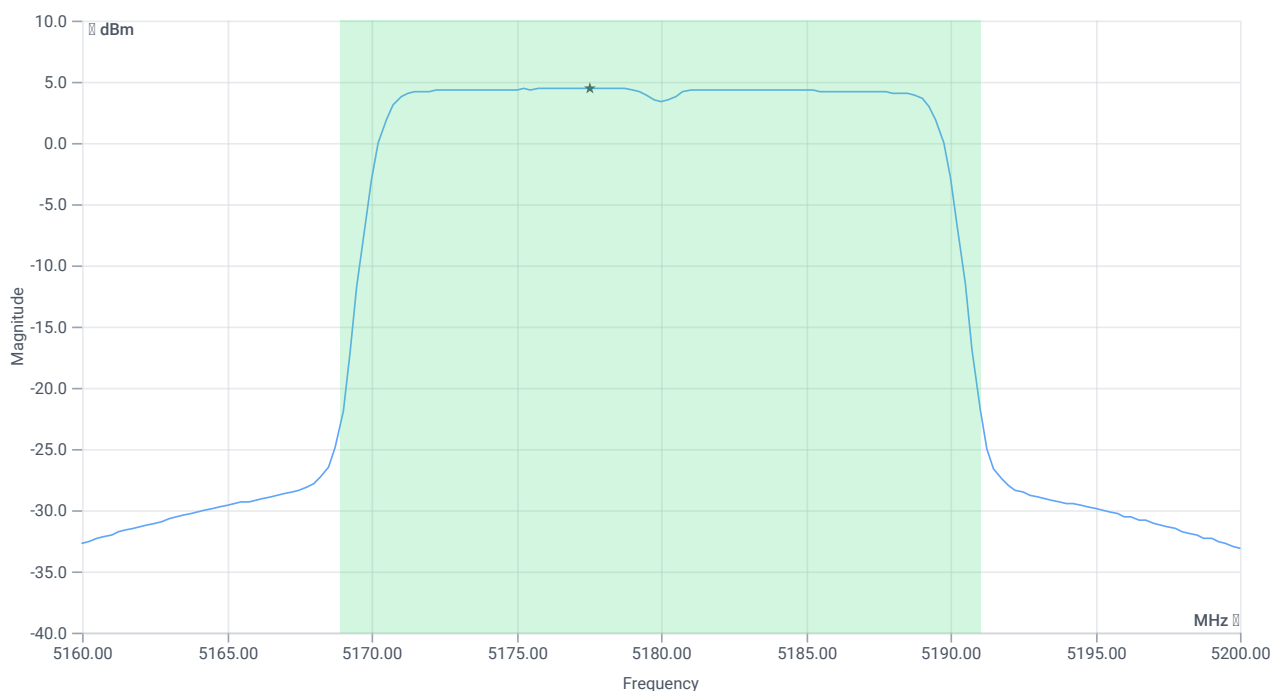

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	16.78	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	16.78	dBm	PASS
Limit: 11 dBm + 10 log 22.08					
Max Output Power DC corrected	---	24.44	16.78	dBm	na

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	4.43	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	4.43	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	11.07.2023 11:13:49
Ambit temp [°C] humidity [rel%]	27.0 46
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5180 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	13.23	dBm	INFO
Ref. Frequency	---	---	5177.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.23 16.39 20
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

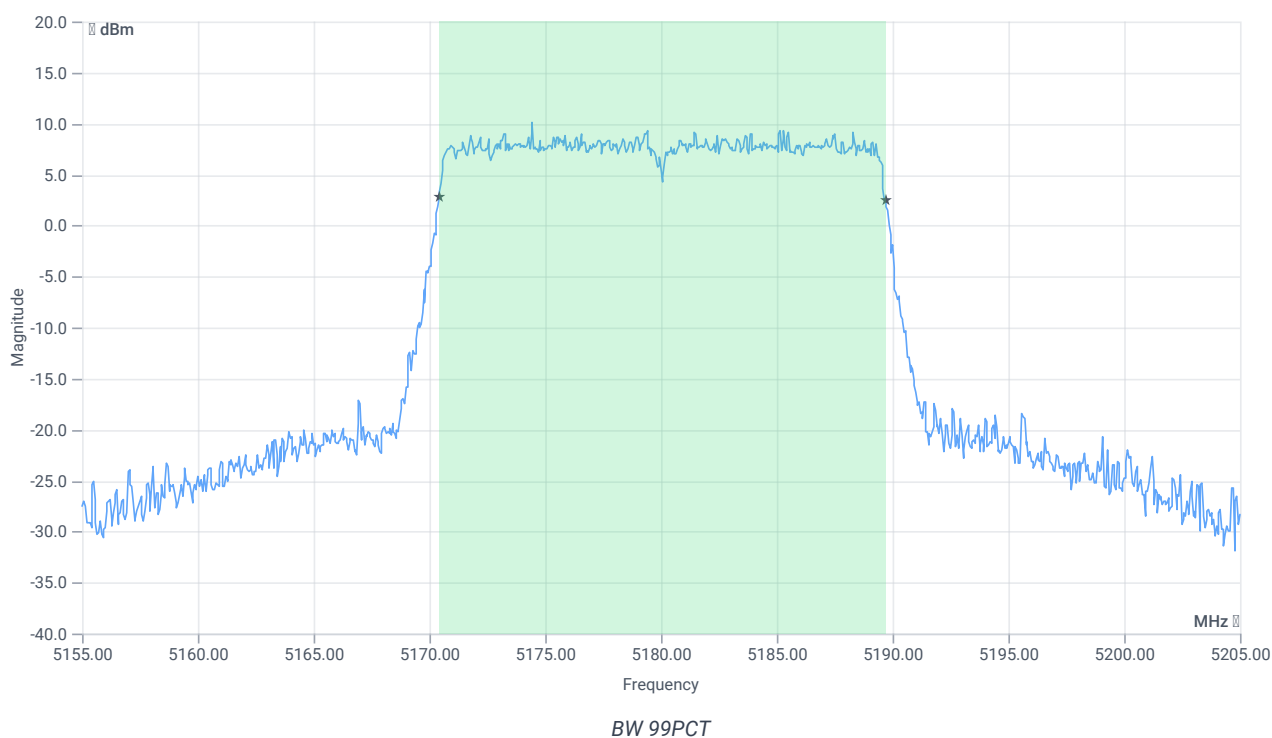


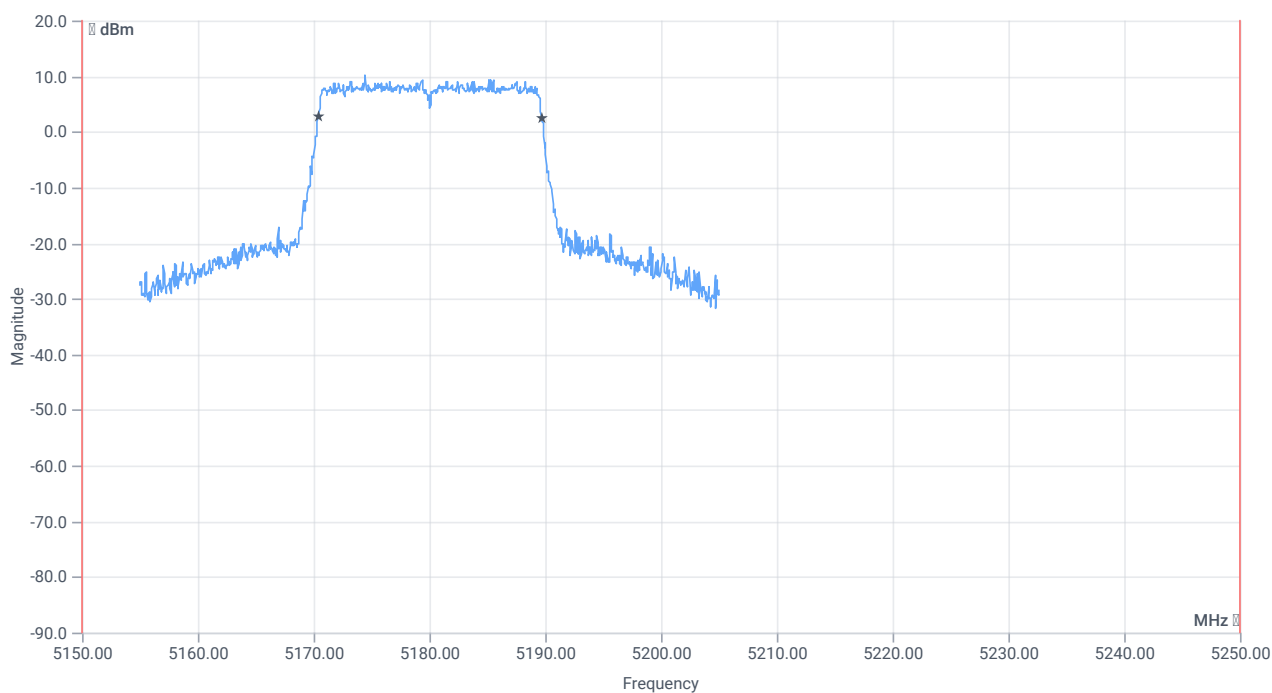


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.281	MHz	INFO
T1 99%	5150.000000	---	5170.4096	MHz	PASS
T2 99%	---	5250.000000	5189.6903	MHz	PASS

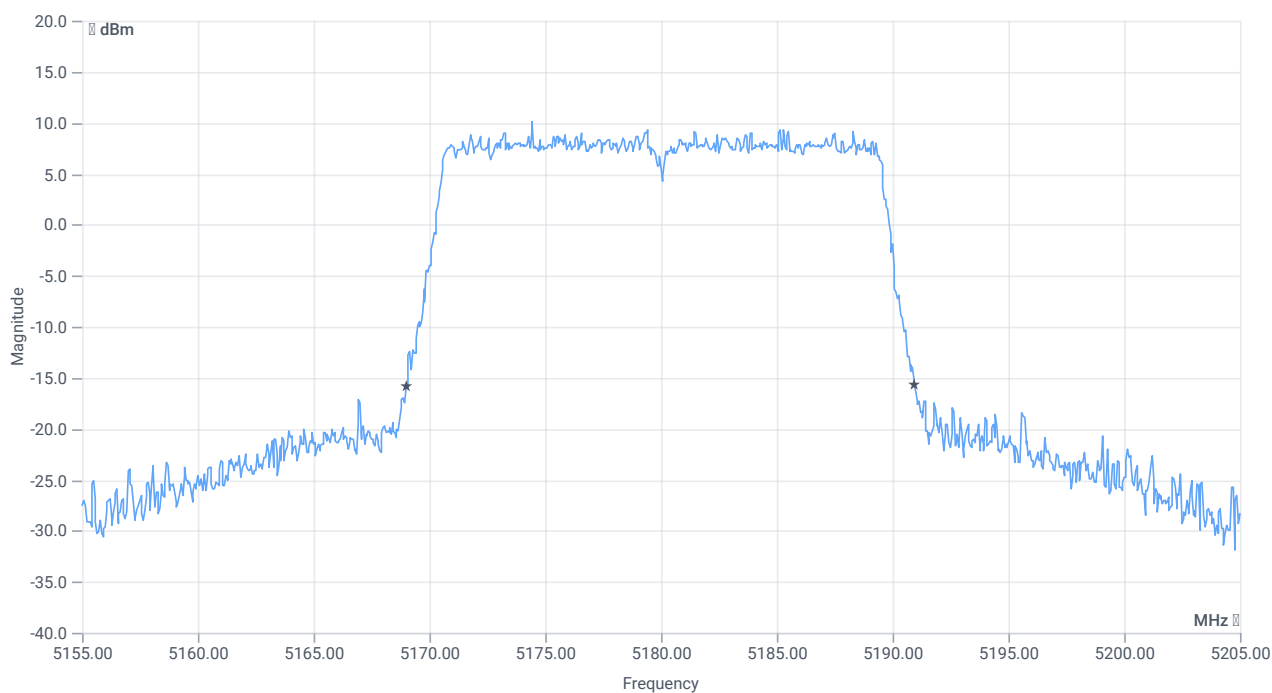

BW 26dB

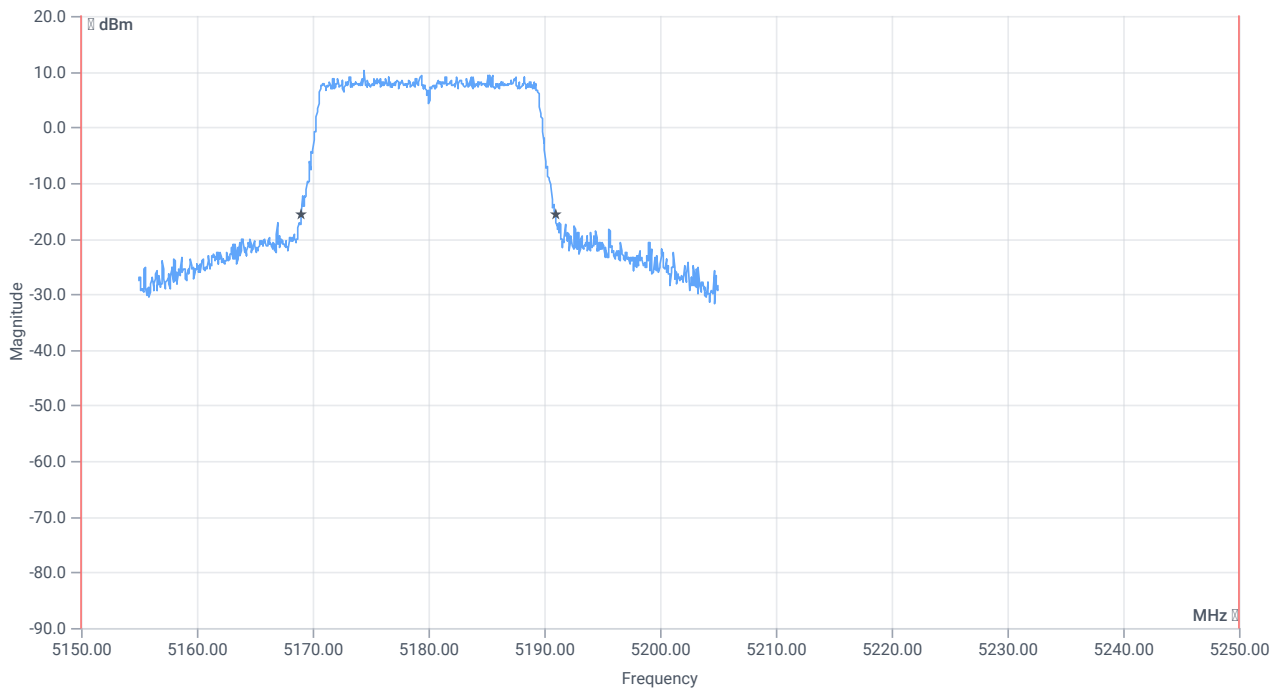

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.95	MHz	INFO
T1 26dB	5150.000000	---	5169.0000	MHz	PASS
T2 26dB	---	5250.000000	5190.9500	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	11.07.2023 11:14:26
Ambit temp [°C] humidity [rel%]	27.0 46
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5180 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	13.87	dBm	INFO
Ref. Frequency	---	---	5180.800	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

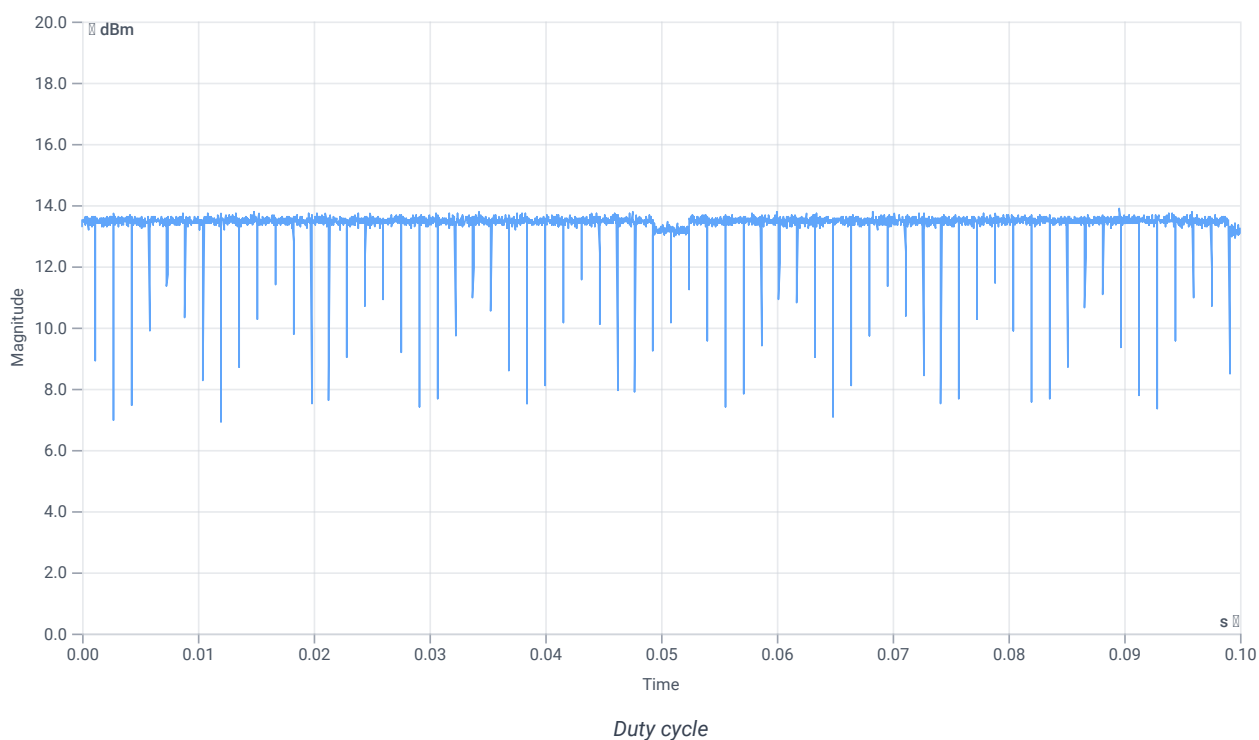

Evaluation Bandwidth

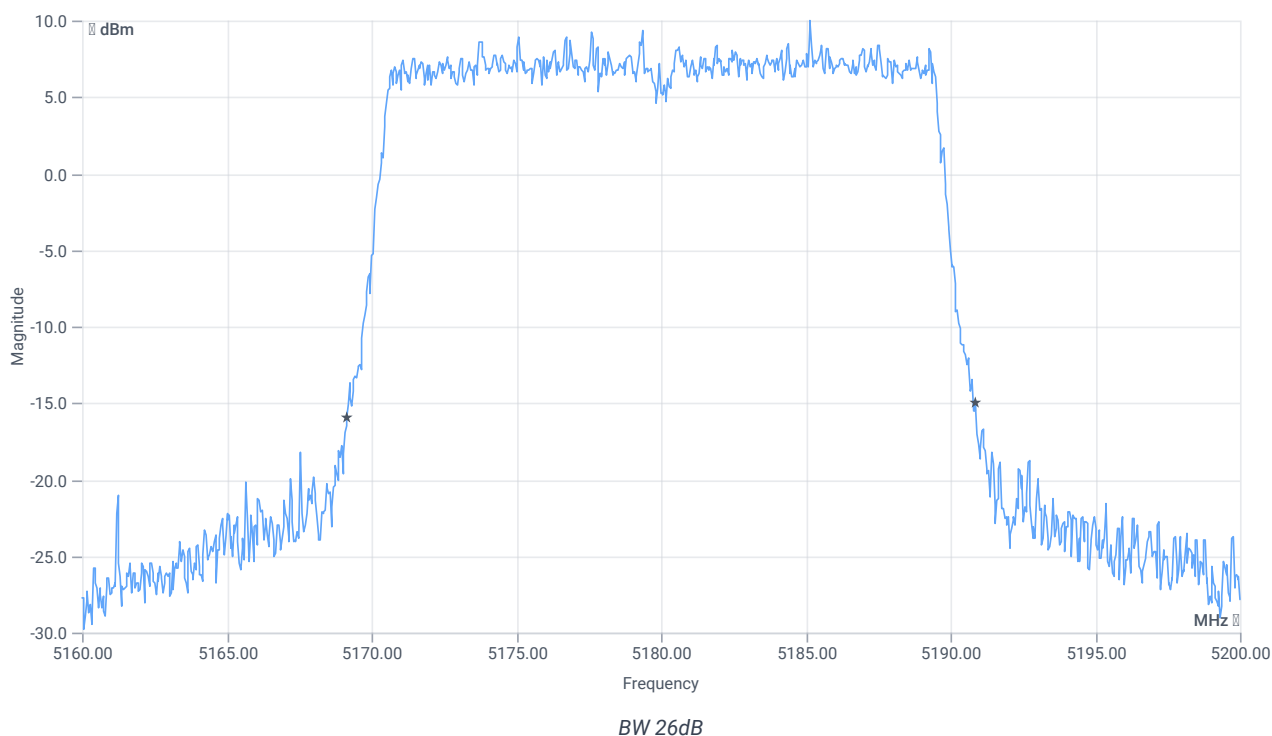


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.72	MHz	INFO
T1 26dB	---	---	5169.1600	MHz	INFO
T2 26dB	---	---	5190.8800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.87 16.39 25
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

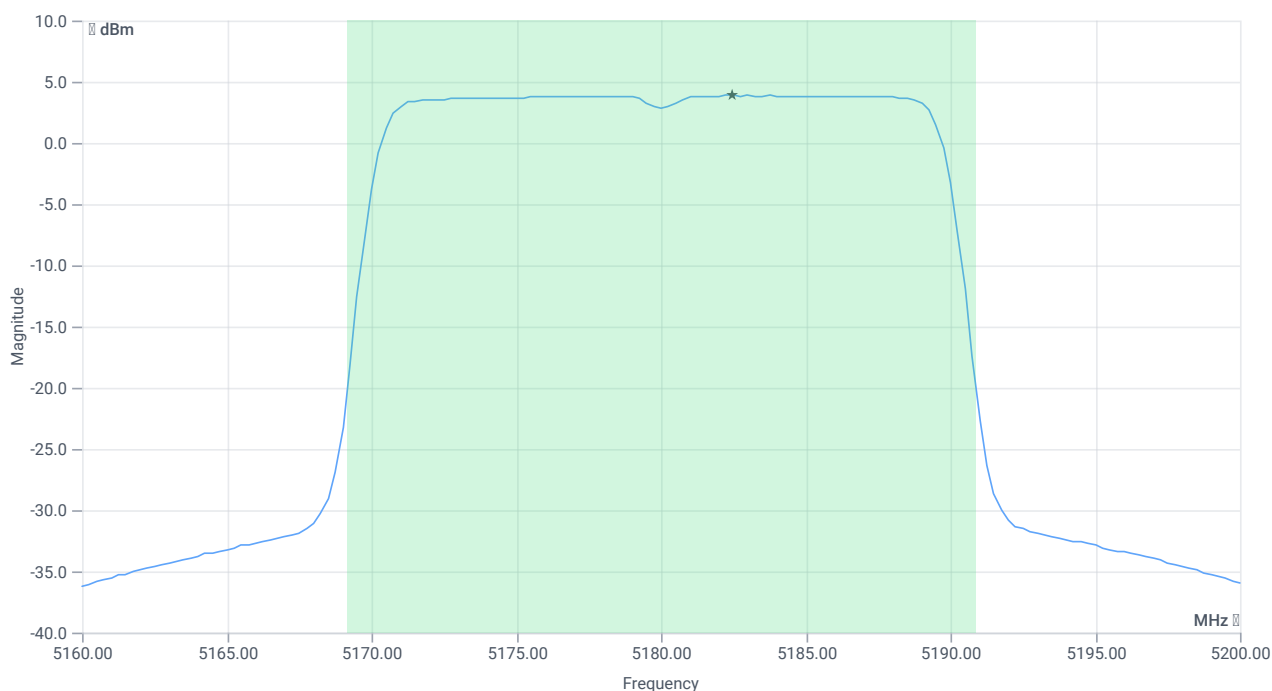

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	16.22	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	16.22	dBm	PASS
Limit: 11 dBm + 10 log 21.72					
Max Output Power DC corrected	---	24.37	16.22	dBm	na

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	3.86	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	3.86	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	11.07.2023 11:15:57
Ambit temp [°C] humidity [rel%]	27.0 46
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5180 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	13.83	dBm	INFO
Ref. Frequency	---	---	5174.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.83 16.39 25
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

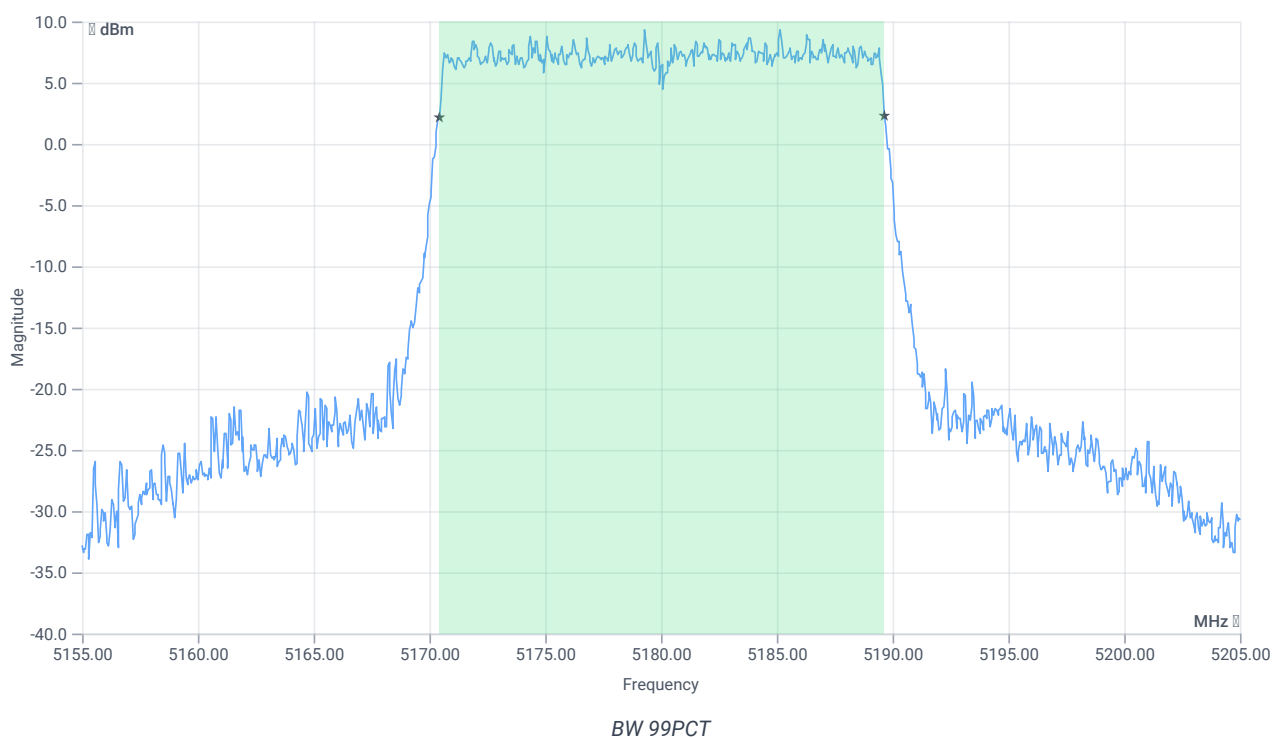


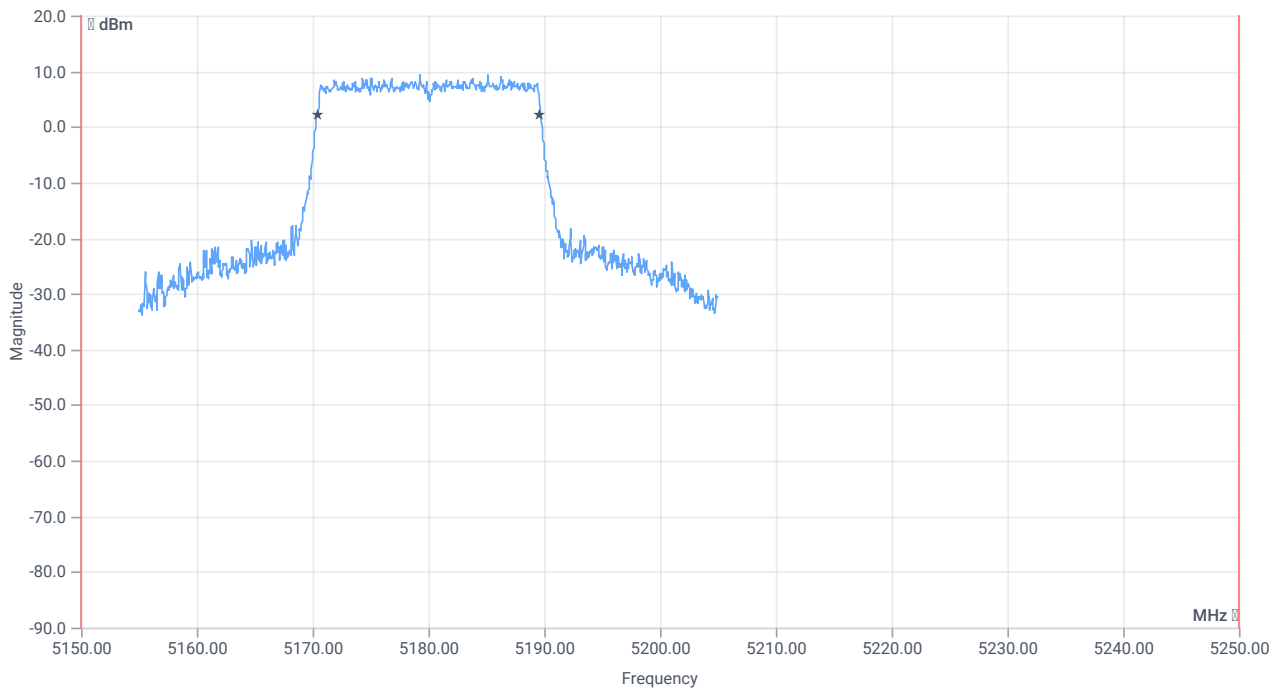


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.231	MHz	INFO
T1 99%	5150.000000	---	5170.4096	MHz	PASS
T2 99%	---	5250.000000	5189.6404	MHz	PASS

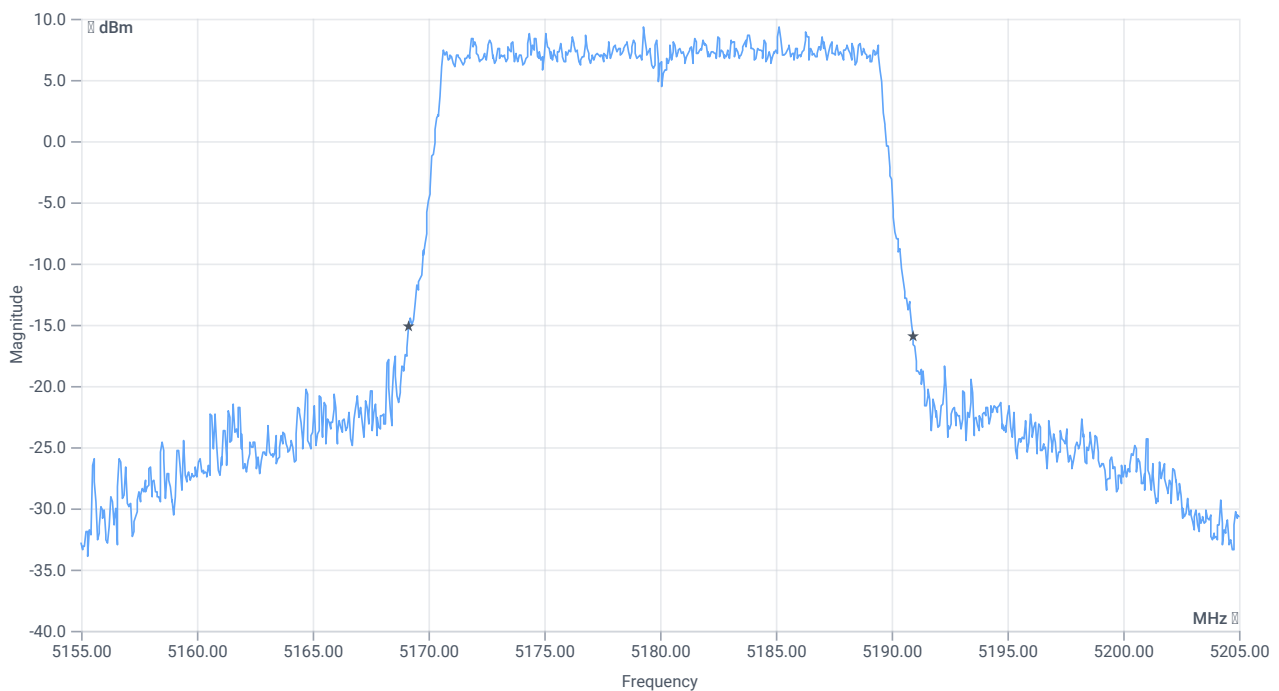

BW 26dB

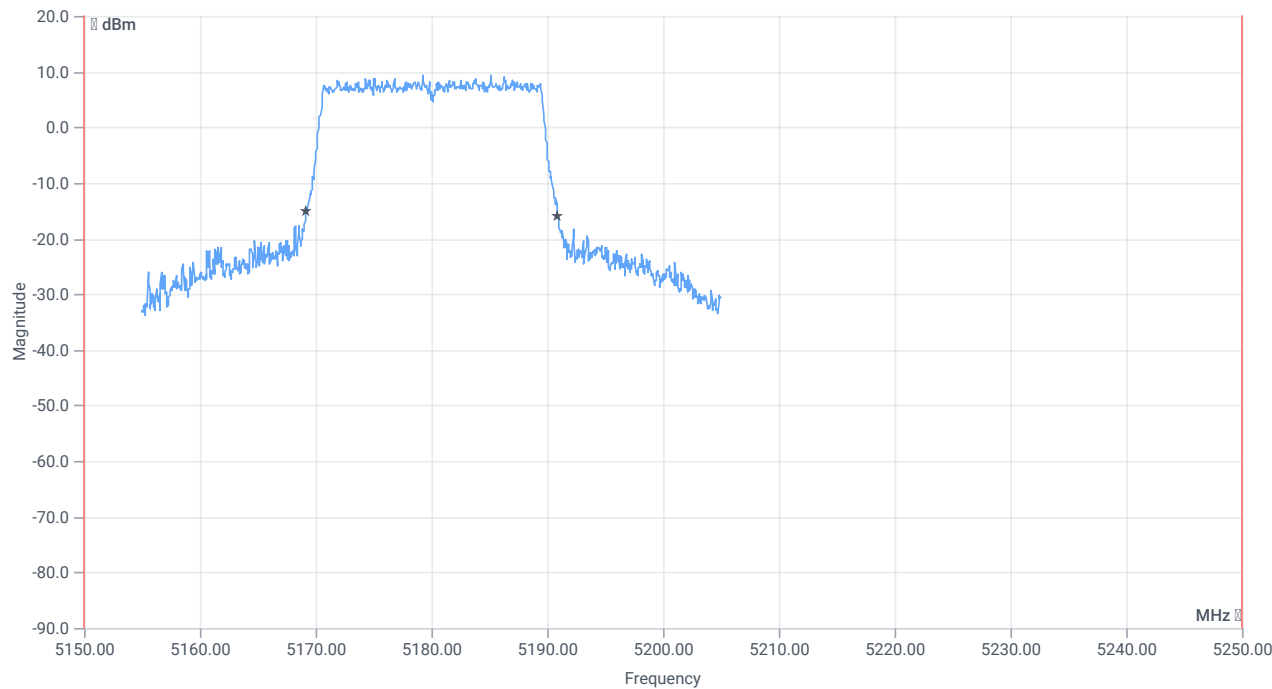

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.75	MHz	INFO
T1 26dB	5150.000000	---	5169.1500	MHz	PASS
T2 26dB	---	5250.000000	5190.9000	MHz	PASS

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 11:16:34
Ambit temp [°C] humidity [rel%]	27.0 46
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA WLAN5Gx ax-HE20 U-NII-1
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 11:16:34
Message	set WLAN5Gx to WLAN5Gx ax-HE20 U-NII-1, Frequency [MHz] 5200 ,

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	26.07.2023 10:32:08
Ambit temp [°C] humidity [rel%]	25.2 47
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2C
Information	PS70

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5500 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.02	dBm	INFO
Ref. Frequency	---	---	5501.200	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

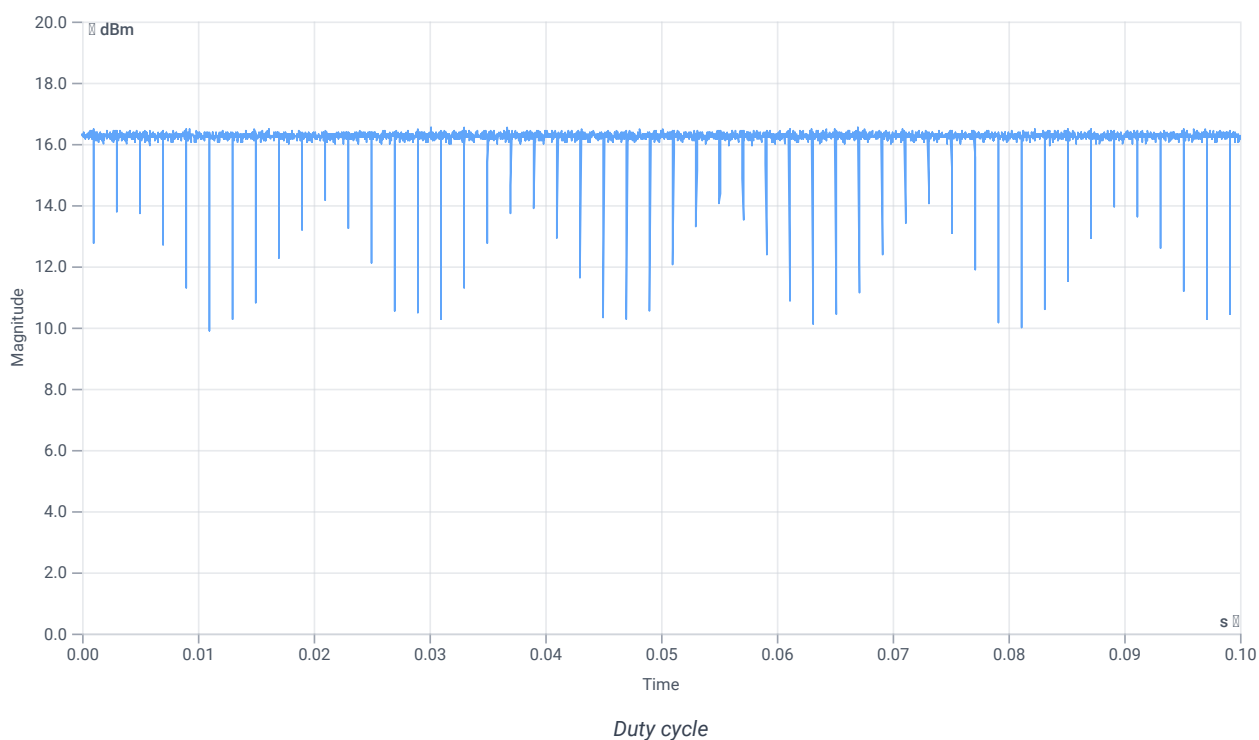

Evaluation Bandwidth

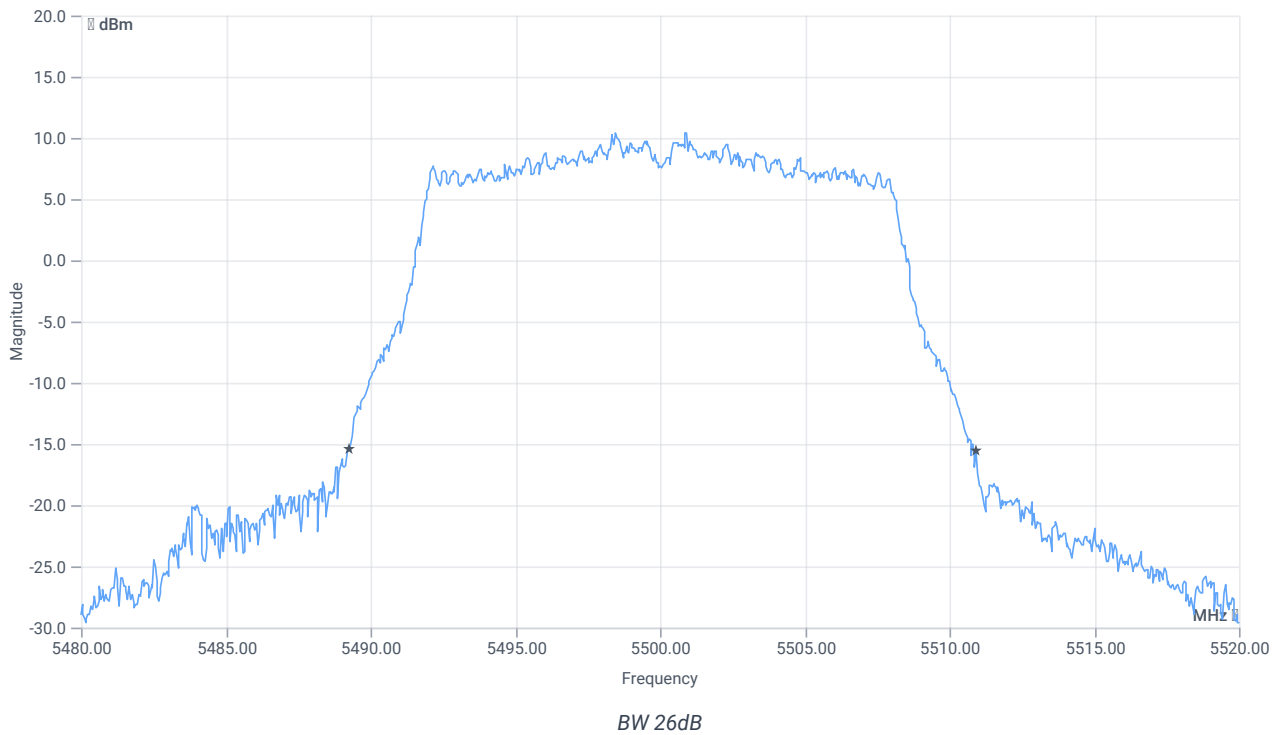


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.68	MHz	INFO
T1 26dB	---	---	5489.2400	MHz	INFO
T2 26dB	---	---	5510.9200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.02 16.59 25
Start [MHz] Stop [MHz]	5480.000 5520.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

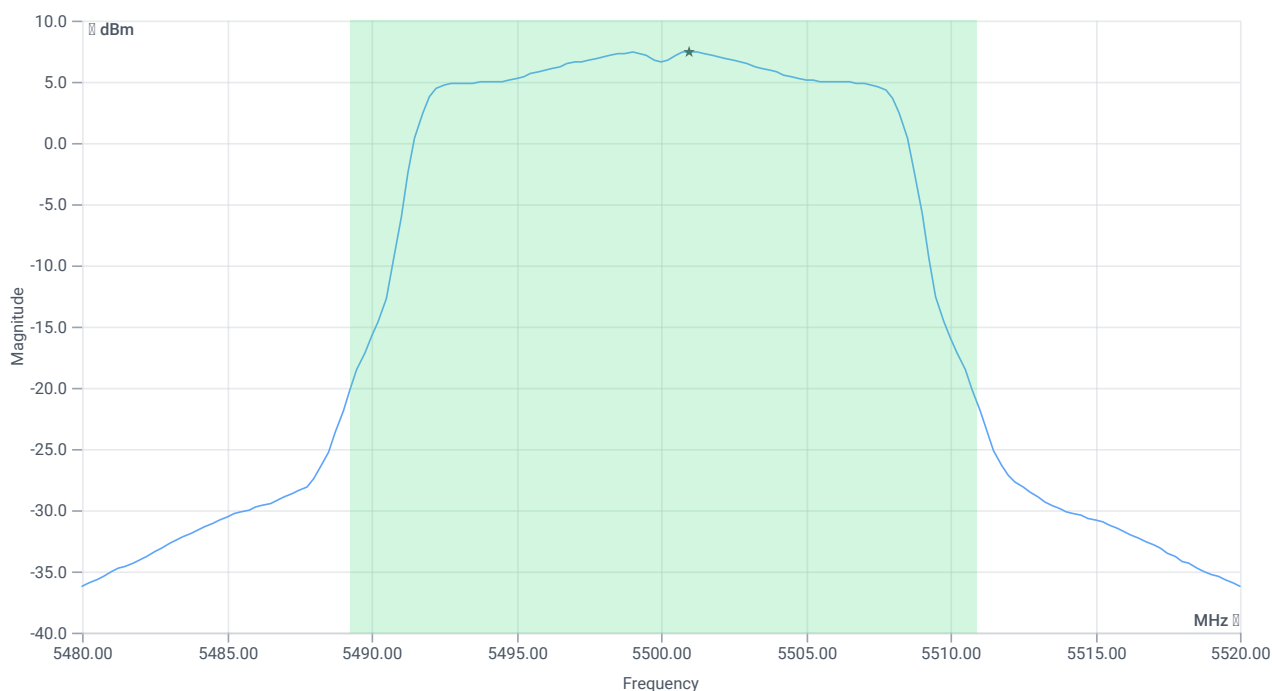

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	17.94	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	17.94	dBm	PASS
Limit: 11 dBm + 10 log 21.68					
Max Output Power DC corrected	---	24.36	17.94	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	7.45	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	7.45	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	26.07.2023 10:33:35
Ambit temp [°C] humidity [rel%]	25.2 47
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2C
Information	PS70

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5500 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.23	dBm	INFO
Ref. Frequency	---	---	5500.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

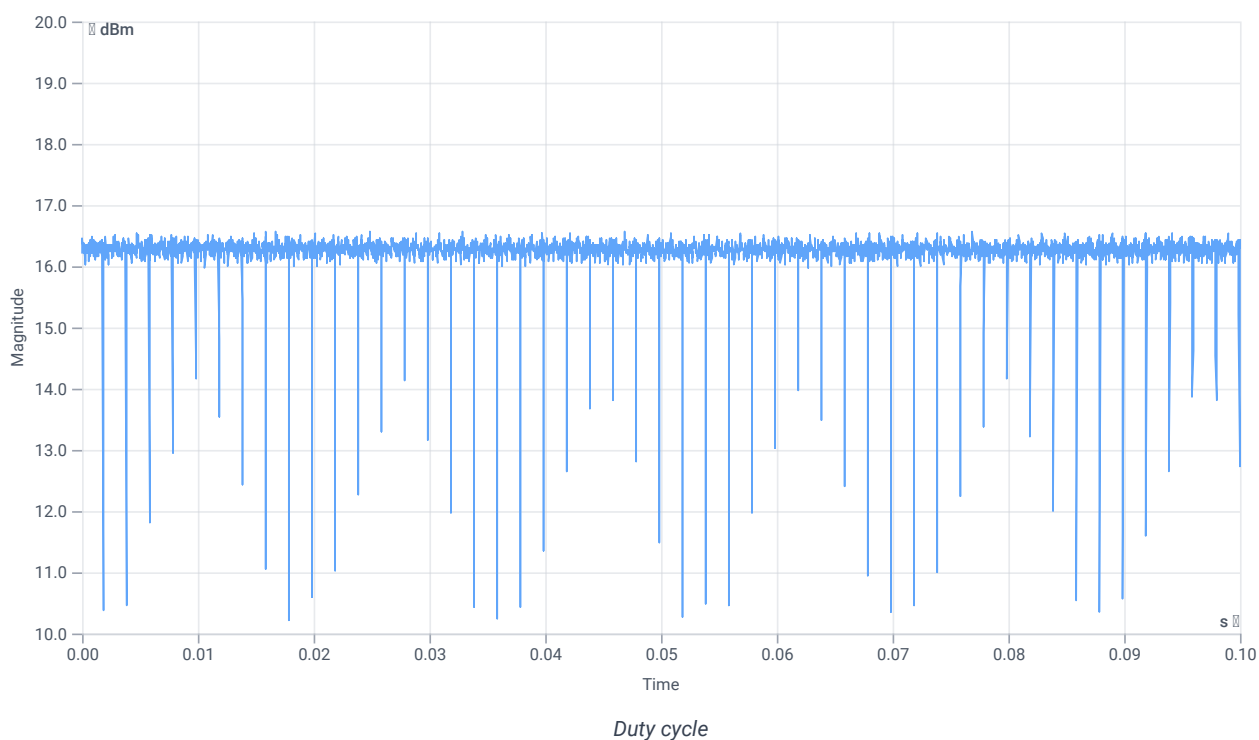

Evaluation Bandwidth

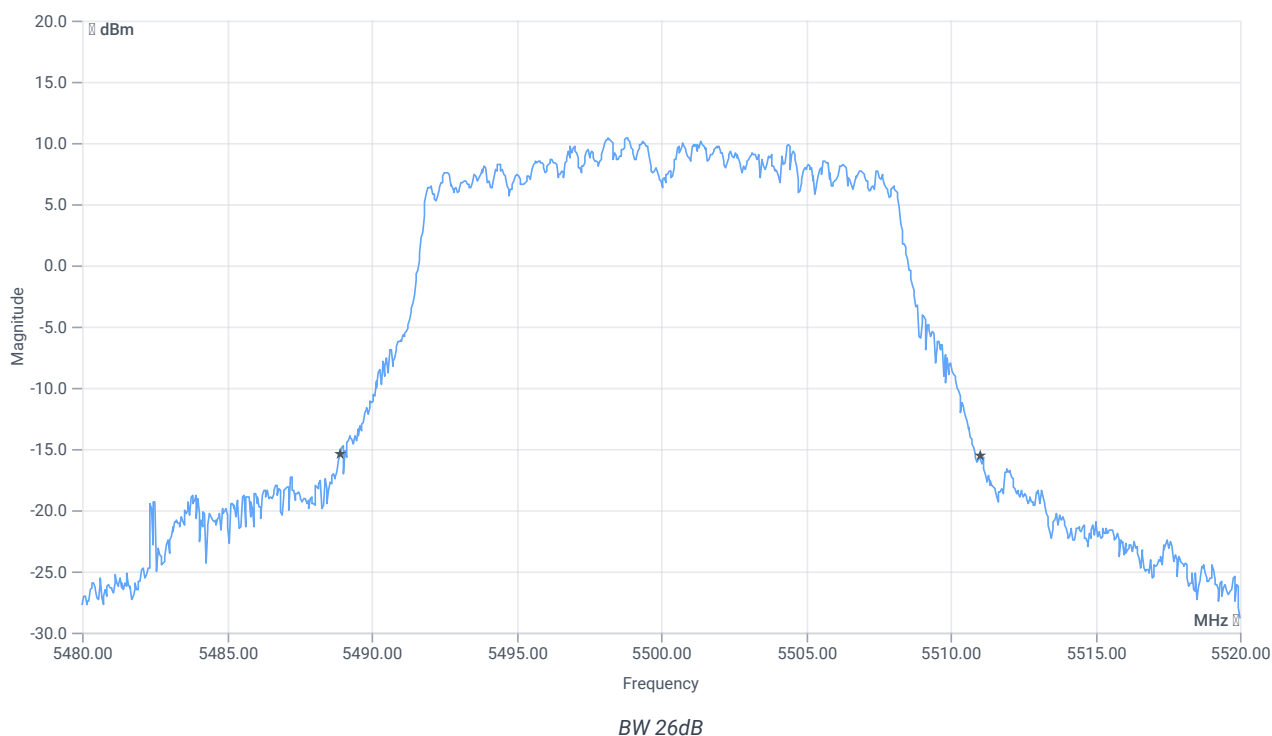


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.08	MHz	INFO
T1 26dB	---	---	5488.9200	MHz	INFO
T2 26dB	---	---	5511.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.23 16.59 25
Start [MHz] Stop [MHz]	5480.000 5520.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

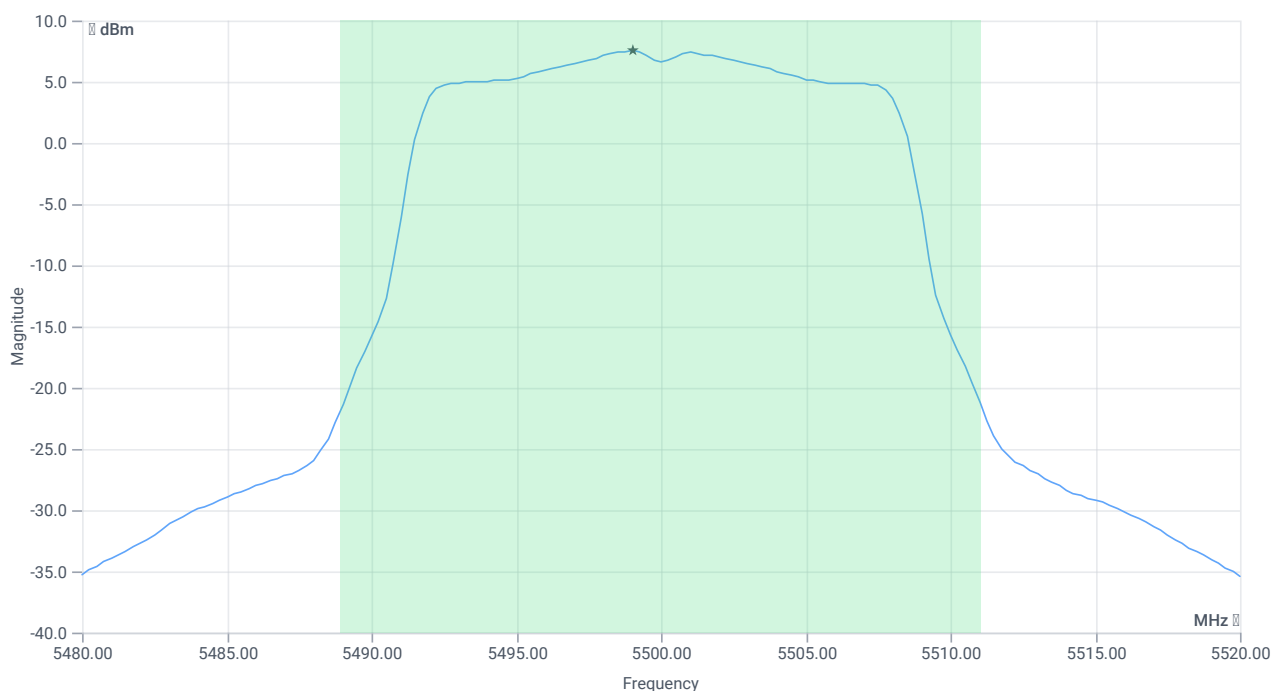

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	17.96	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	17.96	dBm	PASS
Limit: 11 dBm + 10 log 22.08					
Max Output Power DC corrected	---	24.44	17.96	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	7.51	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	7.51	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	26.07.2023 10:35:02
Ambit temp [°C] humidity [rel%]	25.2 47
System version	4.6.0.0
Specification	FCC 15.407 -
Method	
Description	MIMO Σ FCC Power & psd - WLAN5Gx a mode U-NII-2C
Information	PS70

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	several
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	None

Equipment

Test at TX 5500 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	17.94	dBm	INFO
Ant:1 BW 26dB	---	---	21.680	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	17.96	dBm	INFO
Ant:2 BW 26dB	---	---	22.080	MHz	INFO
Σ Limit absolute	---	24	20.96	dBm	PASS
Σ Limit: 11 dBm + 10 log 21.68	---	24.36	20.96	dBm	PASS

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	7.45	dBm/1MHz	INFO
Ant:2 PSD	---	---	7.51	dBm/1MHz	INFO
Σ	---	11	10.49	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	11.07.2023 11:29:12
Ambit temp [°C] humidity [rel%]	27.1 46
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5200 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.17	dBm	INFO
Ref. Frequency	---	---	5197.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.17 16.31 25
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

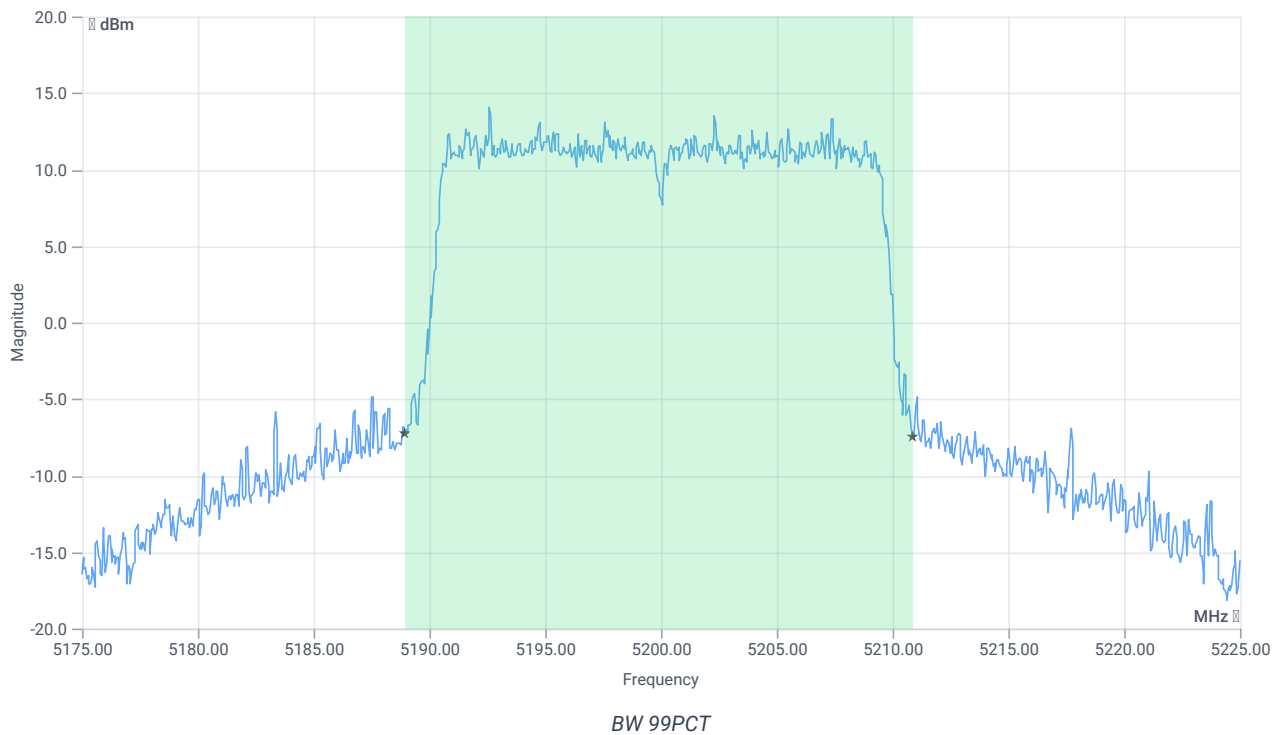


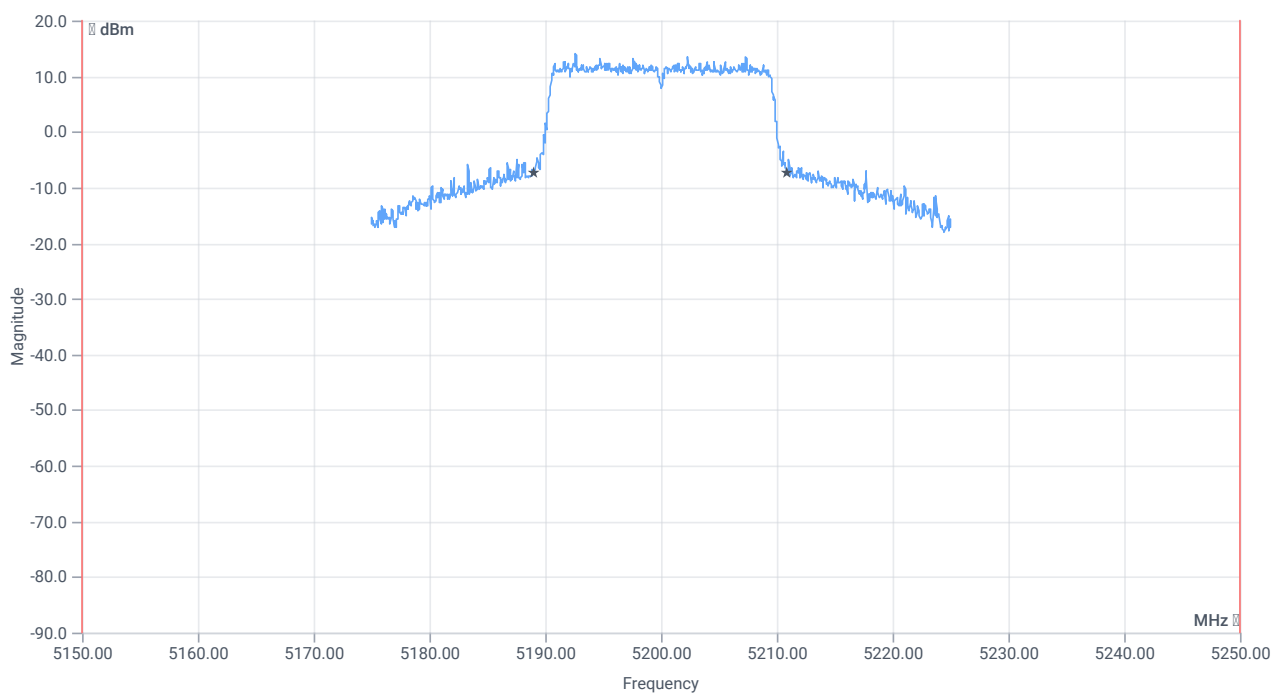


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	21.928	MHz	INFO
T1 99%	5150.000000	---	5188.9610	MHz	PASS
T2 99%	---	5250.000000	5210.8891	MHz	PASS

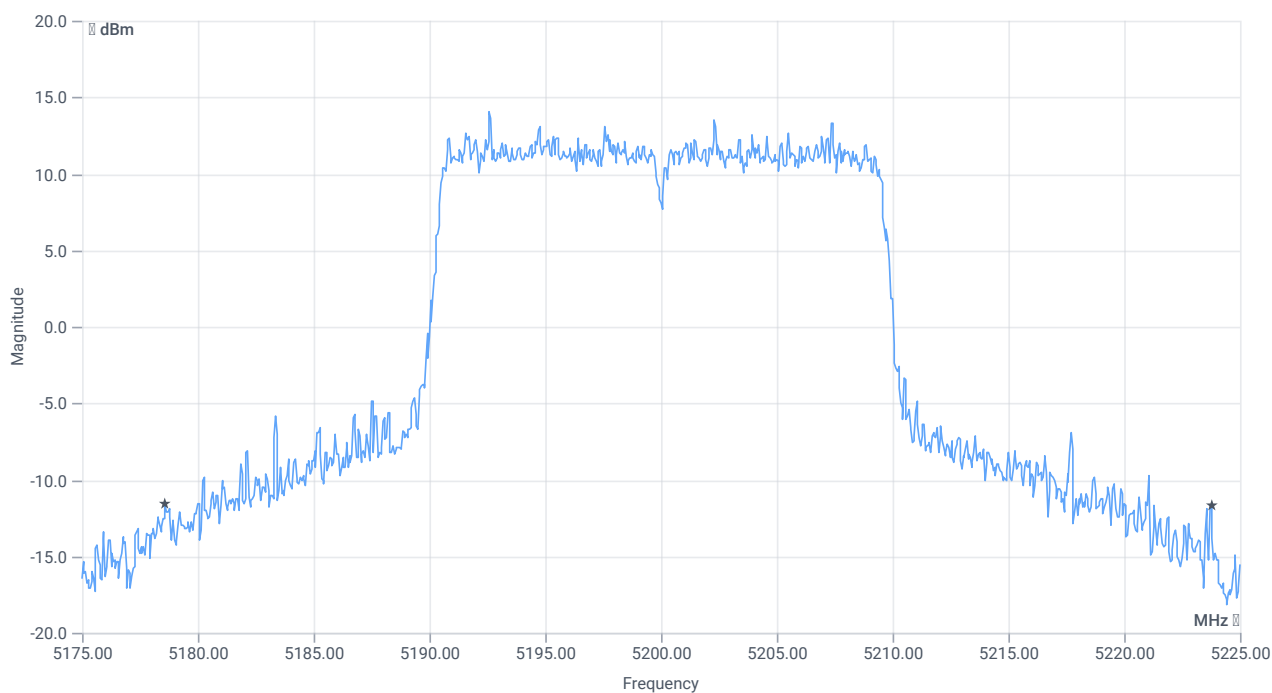

BW 26dB

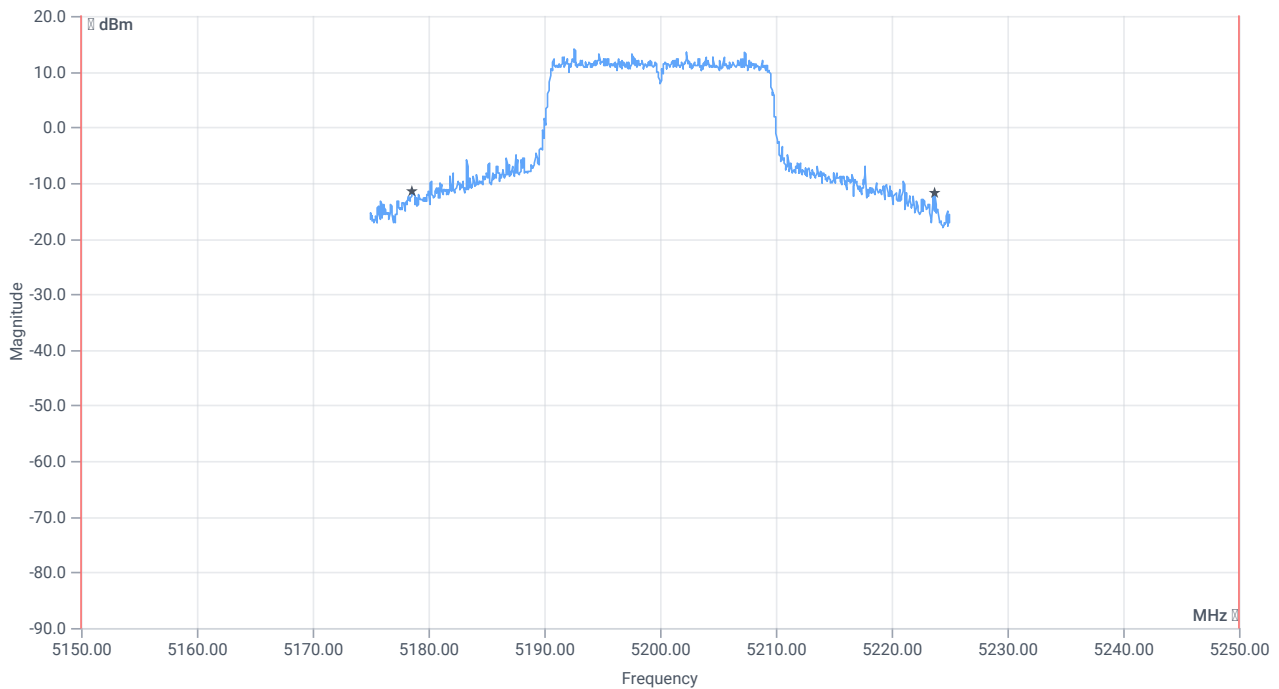

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	45.15	MHz	INFO
T1 26dB	5150.000000	---	5178.6000	MHz	PASS
T2 26dB	---	5250.000000	5223.7500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	11.07.2023 11:31:17
Ambit temp [°C] humidity [rel%]	27.1 46
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5200 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.34	dBm	INFO
Ref. Frequency	---	---	5197.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.34 16.31 25
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

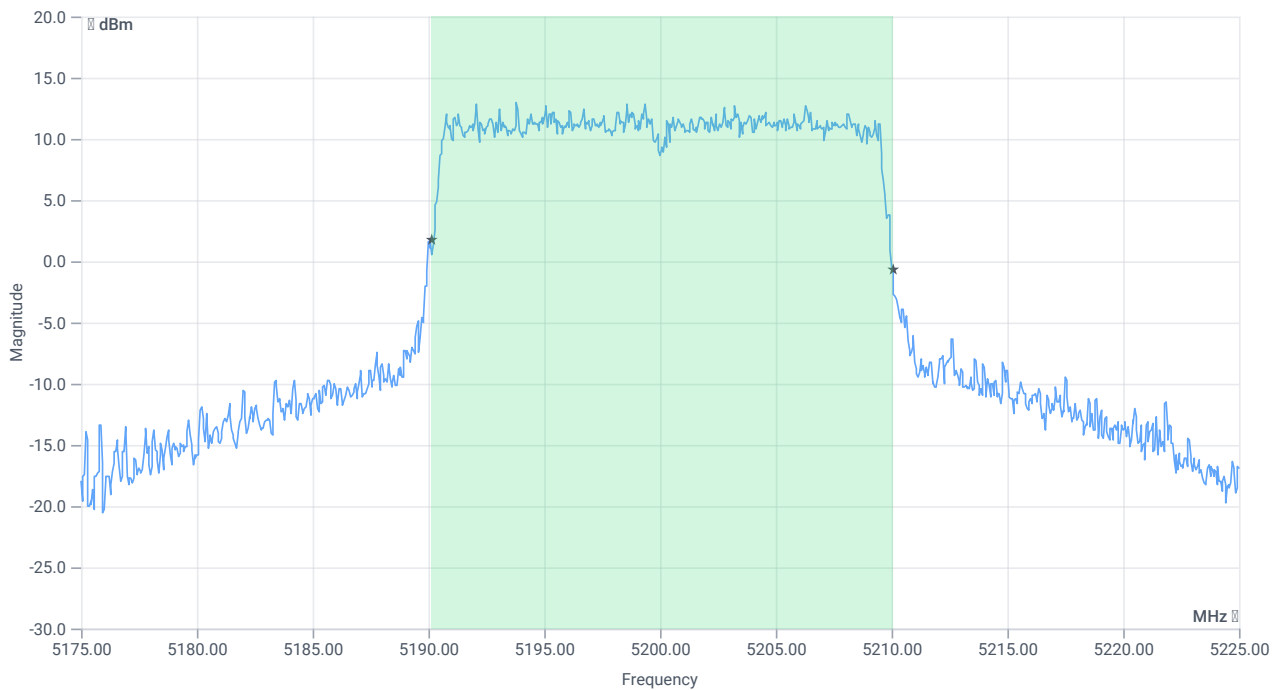


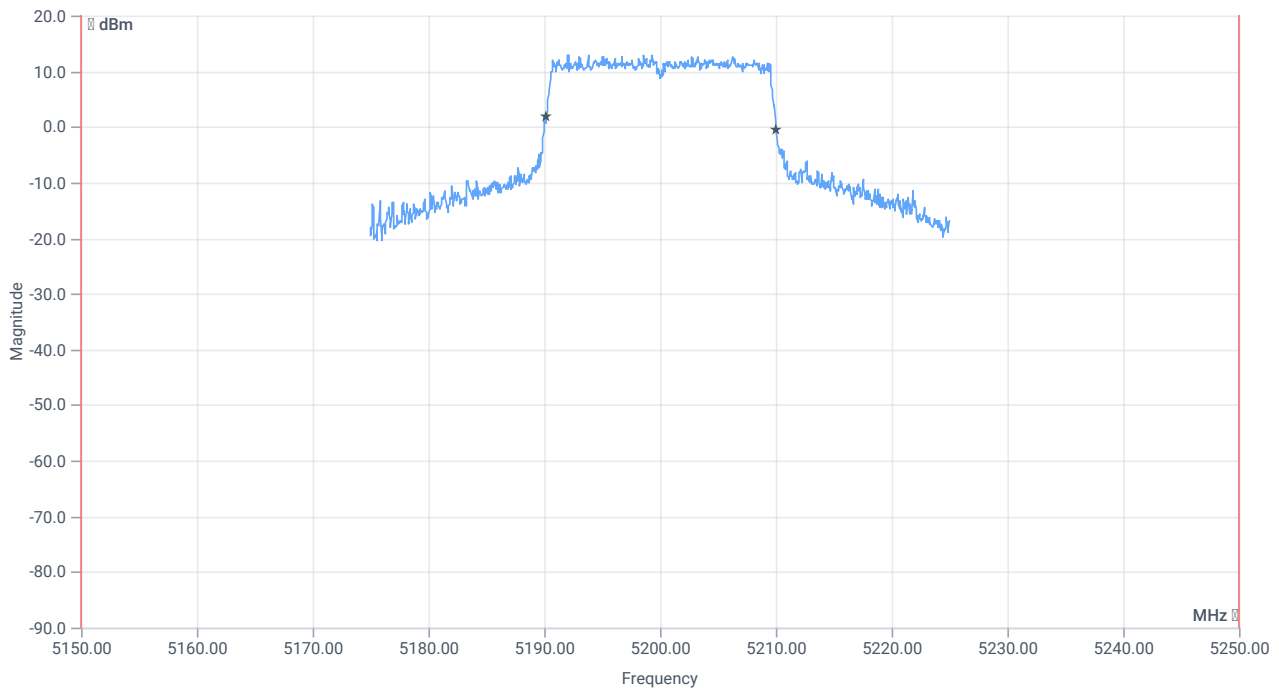


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.930	MHz	INFO
T1 99%	5150.000000	---	5190.1099	MHz	PASS
T2 99%	---	5250.000000	5210.0400	MHz	PASS

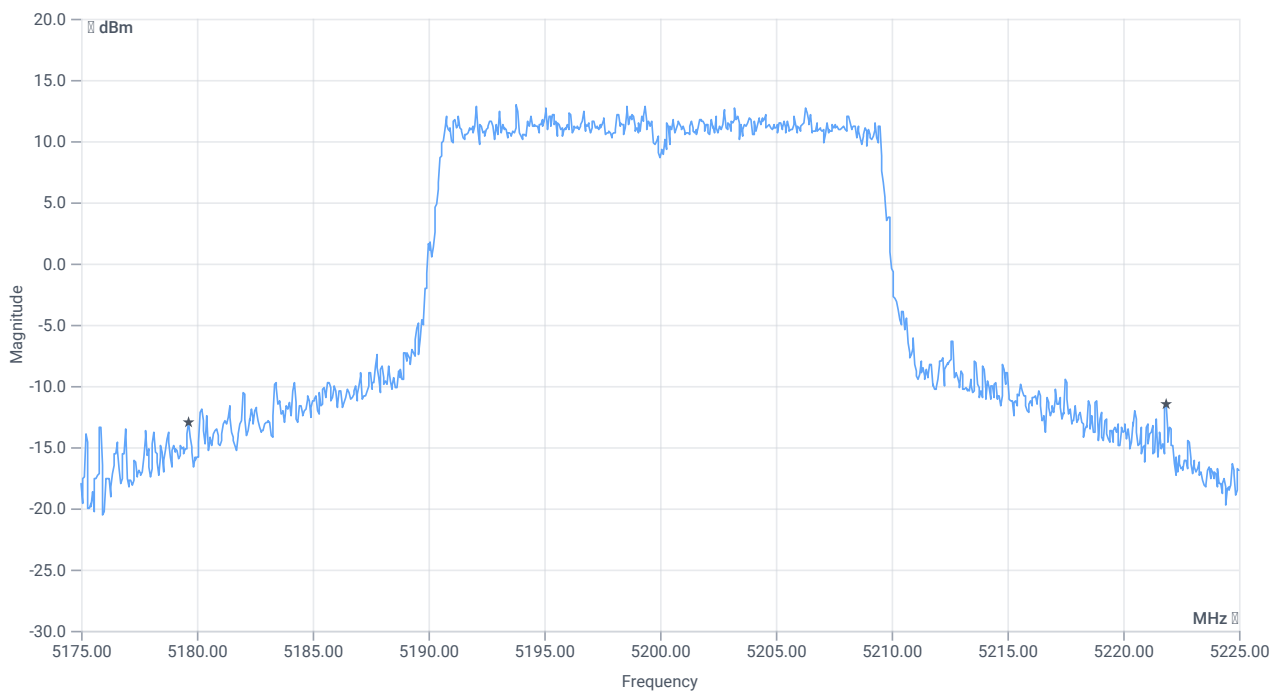

BW 26dB

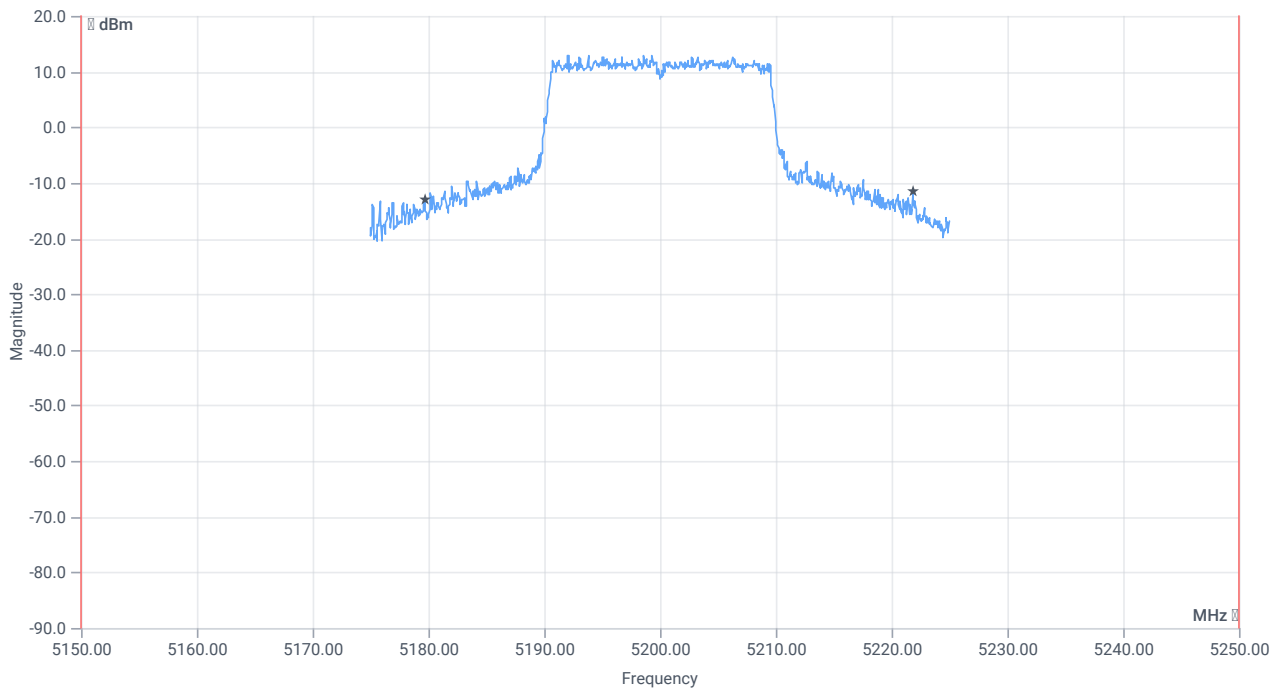

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.2	MHz	INFO
T1 26dB	5150.000000	---	5179.6500	MHz	PASS
T2 26dB	---	5250.000000	5221.8500	MHz	PASS

Verdict

PASS

Message with SA scan ~

References

TC start	20.07.2023 08:52:06
Ambit temp [°C] humidity [rel%]	22.5 50
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA WLAN5Gx ax-HE20 U-NII-1
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	20.07.2023 08:52:07
Message	set WLAN5Gx to WLAN5Gx ax-HE20 U-NII-1, Frequency [MHz] 5240

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	20.07.2023 08:52:16
Ambit temp [°C] humidity [rel%]	22.5 50
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-1
Information	PS76

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5240 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.52	dBm	INFO
Ref. Frequency	---	---	5242.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

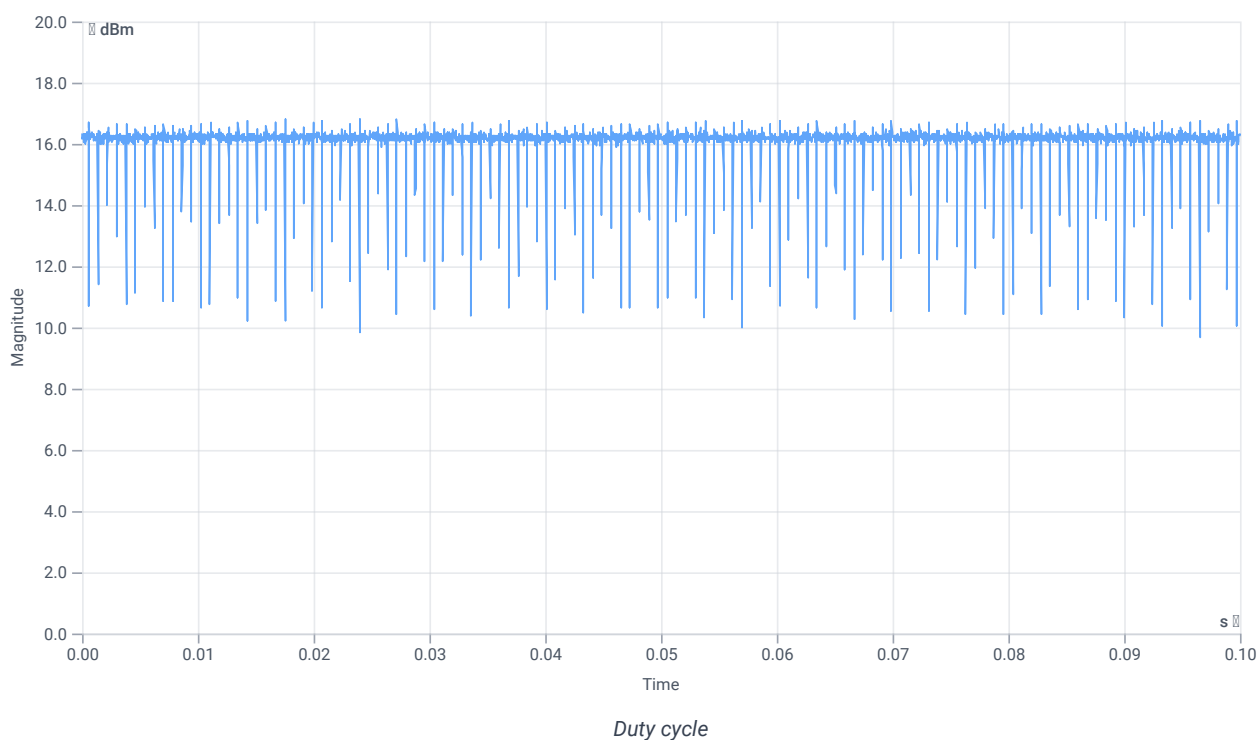

Evaluation Bandwidth

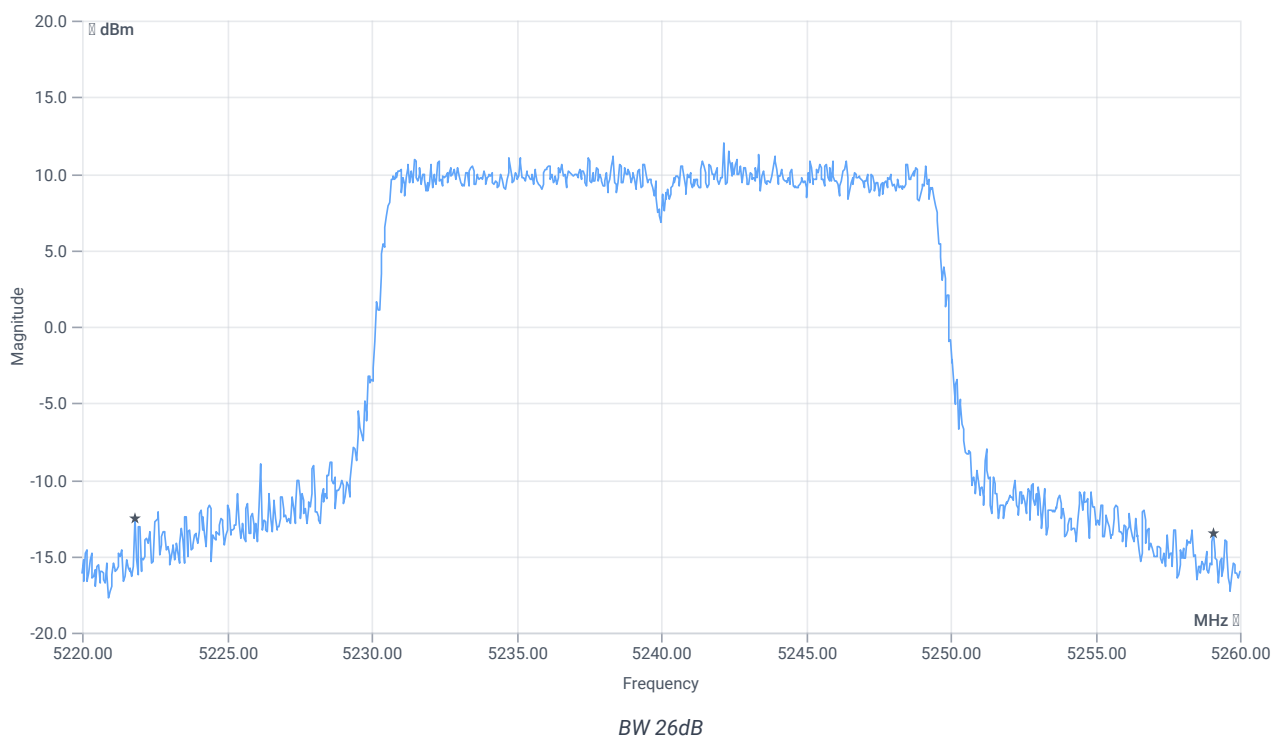


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	37.28	MHz	INFO
T1 26dB	---	---	5221.8000	MHz	INFO
T2 26dB	---	---	5259.0800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.52 16.37 30
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

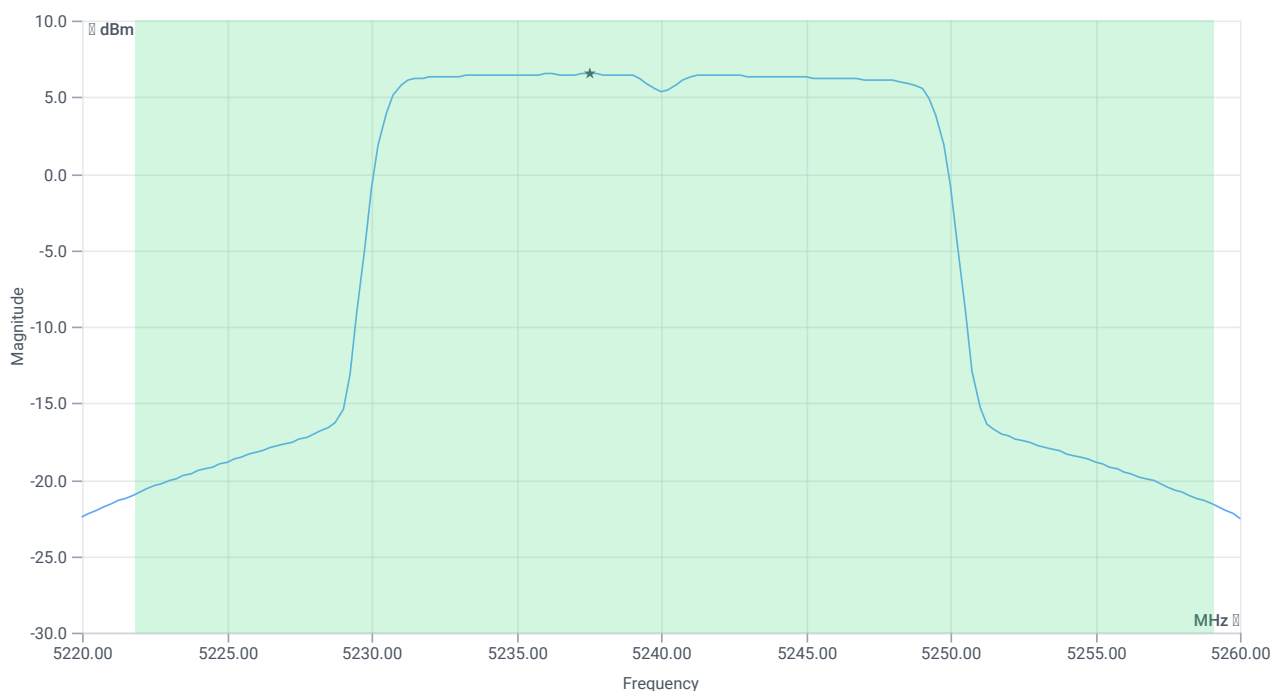

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	18.82	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	18.82	dBm	PASS
Limit: 11 dBm + 10 log 37.28					
Max Output Power DC corrected	---	26.71	18.82	dBm	na

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	6.5	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	6.5	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	20.07.2023 08:53:47
Ambit temp [°C] humidity [rel%]	22.6 50
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-1
Information	PS76

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5240 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.18	dBm	INFO
Ref. Frequency	---	---	5245.790	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.18 16.37 25
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

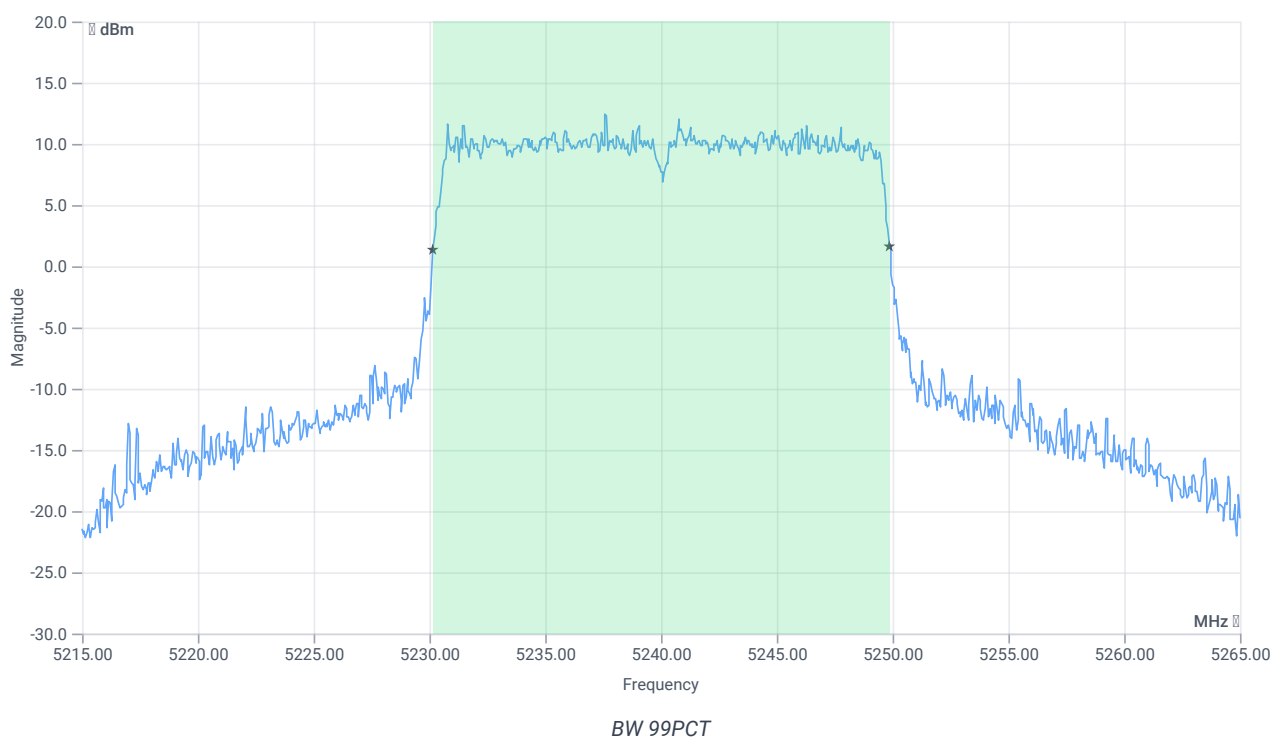





BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.730	MHz	INFO
T1 99%	5150.000000	---	5230.1598	MHz	PASS
T2 99%	---	5250.000000	5249.8901	MHz	PASS

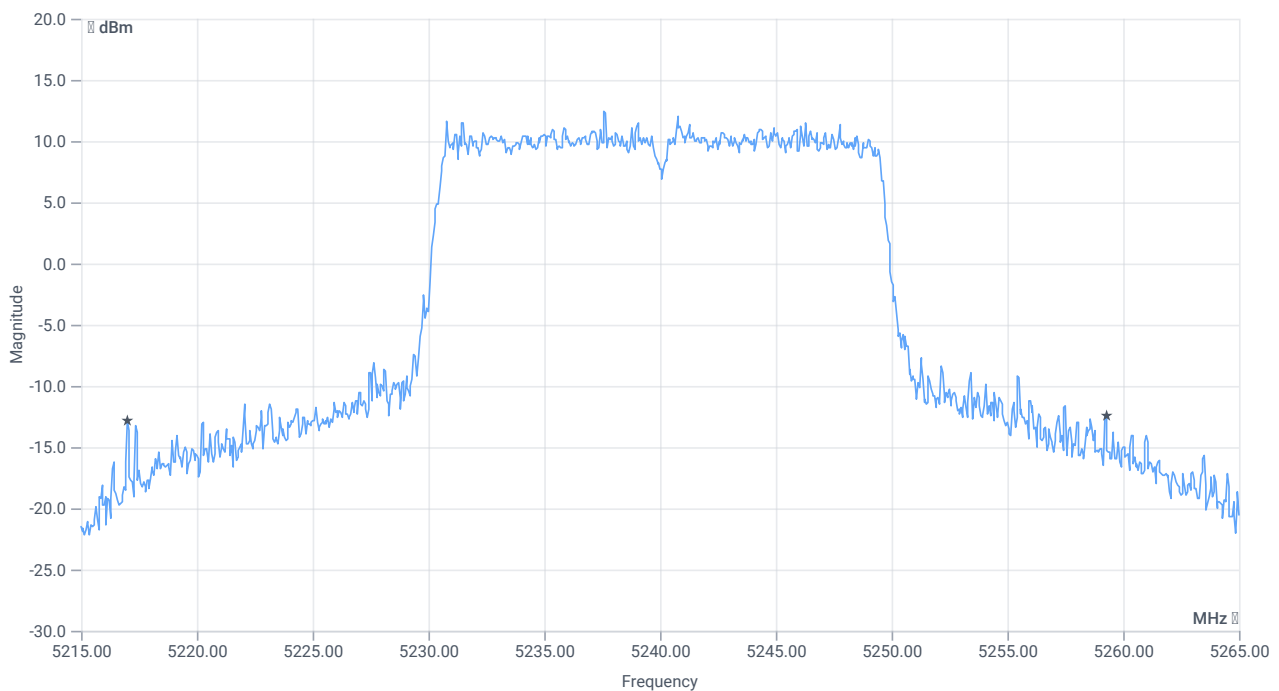

BW 26dB

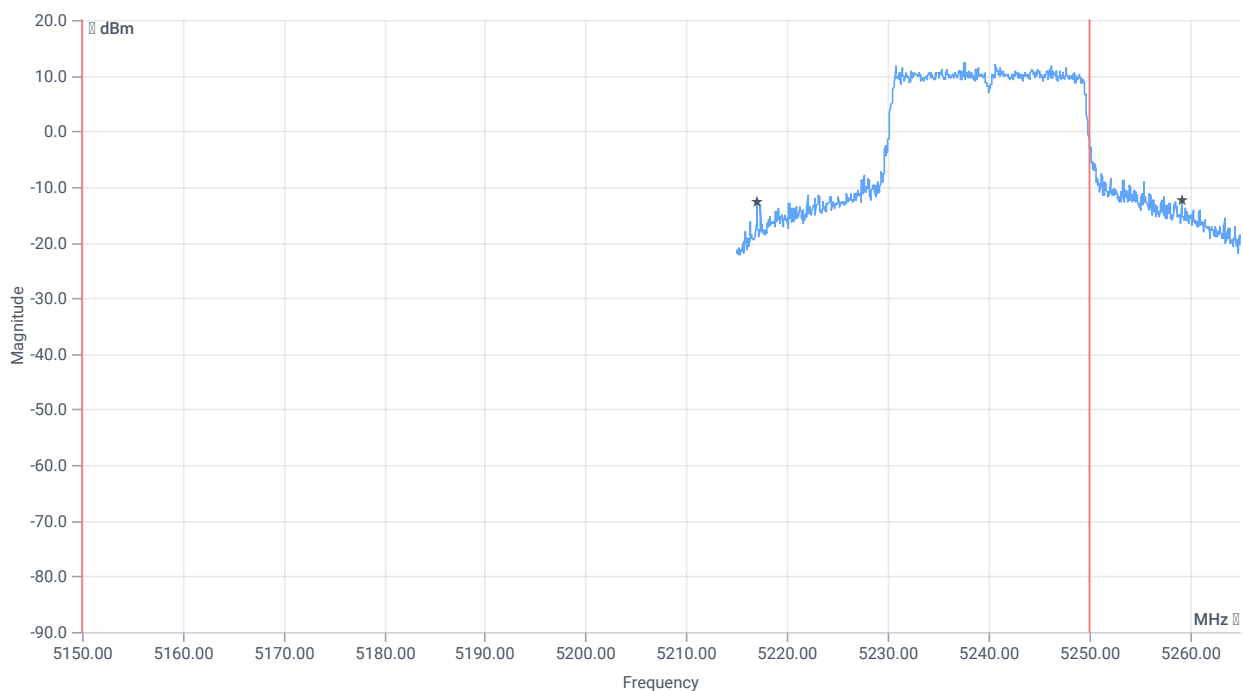

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.25	MHz	INFO
T1 26dB	5150.000000	---	5217.0000	MHz	PASS
T2 26dB	---	5250.000000	5259.2500	MHz	DFS required

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	20.07.2023 08:54:19
Ambit temp [°C] humidity [rel%]	22.6 50
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-1
Information	PS76

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5240 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.28	dBm	INFO
Ref. Frequency	---	---	5238.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

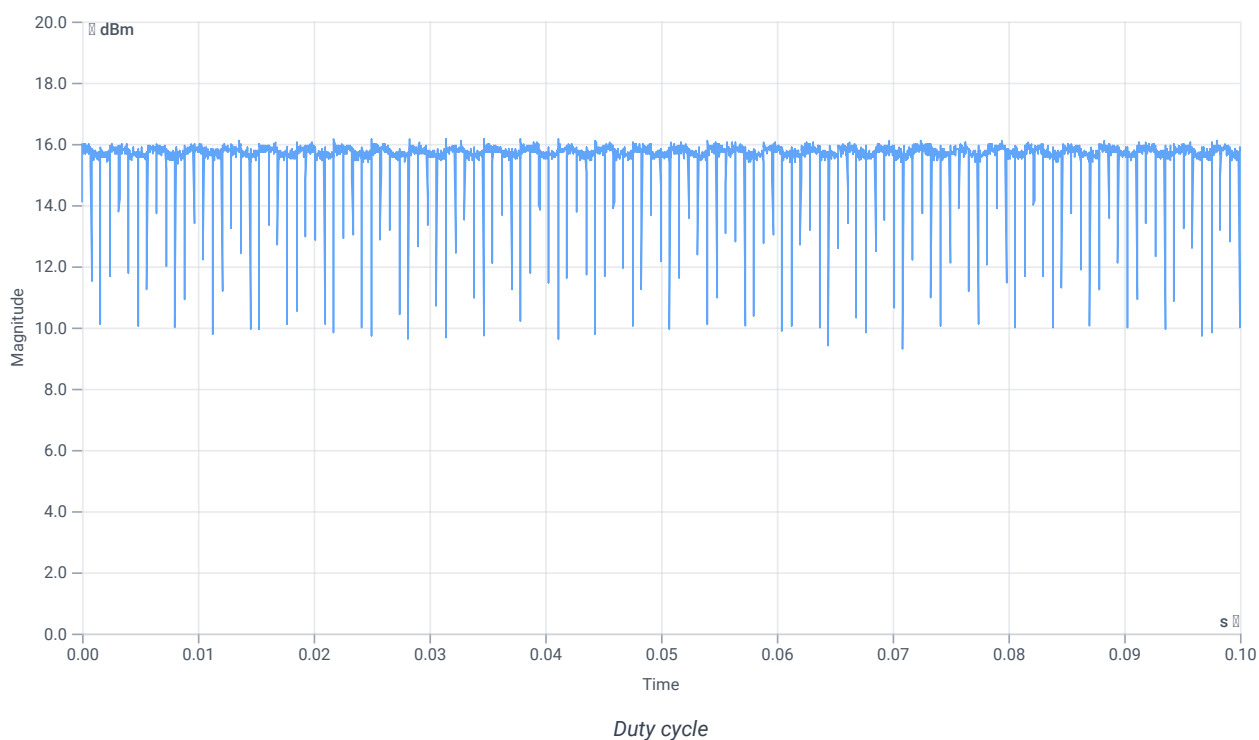

Evaluation Bandwidth

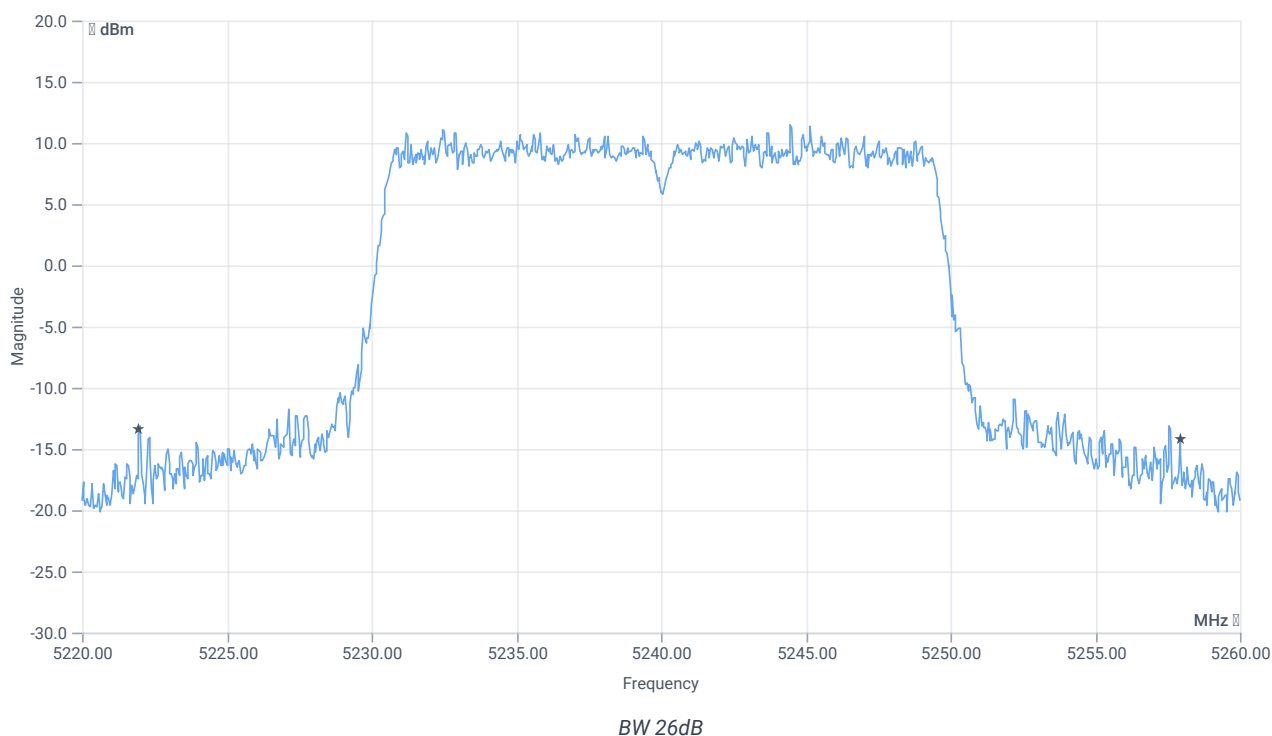


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	35.96	MHz	INFO
T1 26dB	---	---	5221.9600	MHz	INFO
T2 26dB	---	---	5257.9200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.28 16.37 25
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

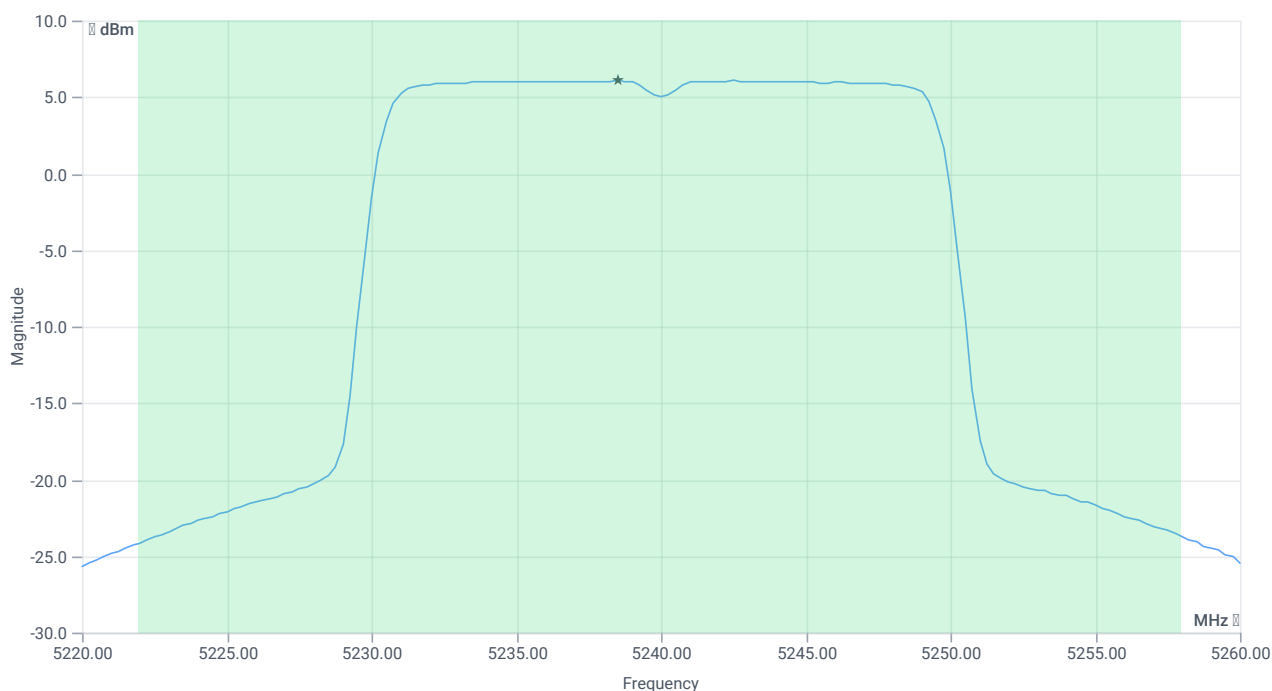

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	18.44	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	18.44	dBm	PASS
Limit: 11 dBm + 10 log 35.96					
Max Output Power DC corrected	---	26.56	18.44	dBm	na

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	6.06	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	6.06	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	20.07.2023 08:55:51
Ambit temp [°C] humidity [rel%]	22.6 50
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-1
Information	PS76

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5240 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.30	dBm	INFO
Ref. Frequency	---	---	5235.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.30 16.37 25
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

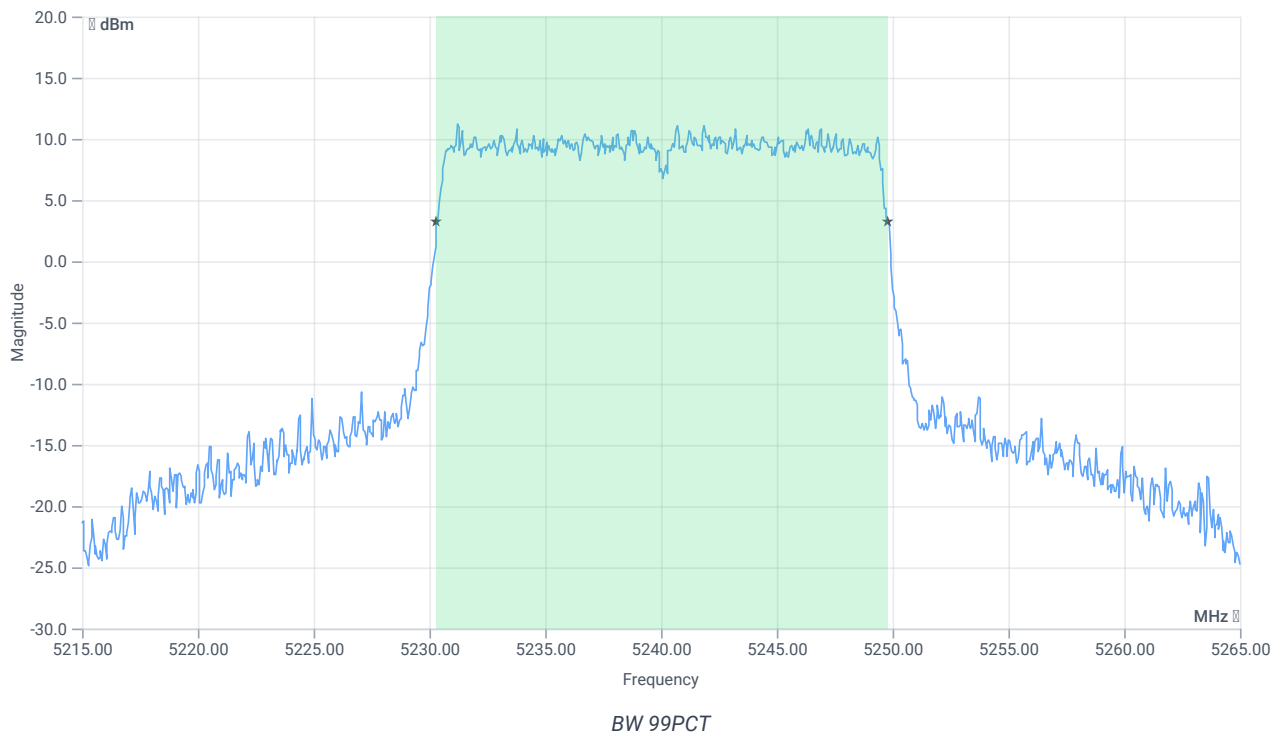


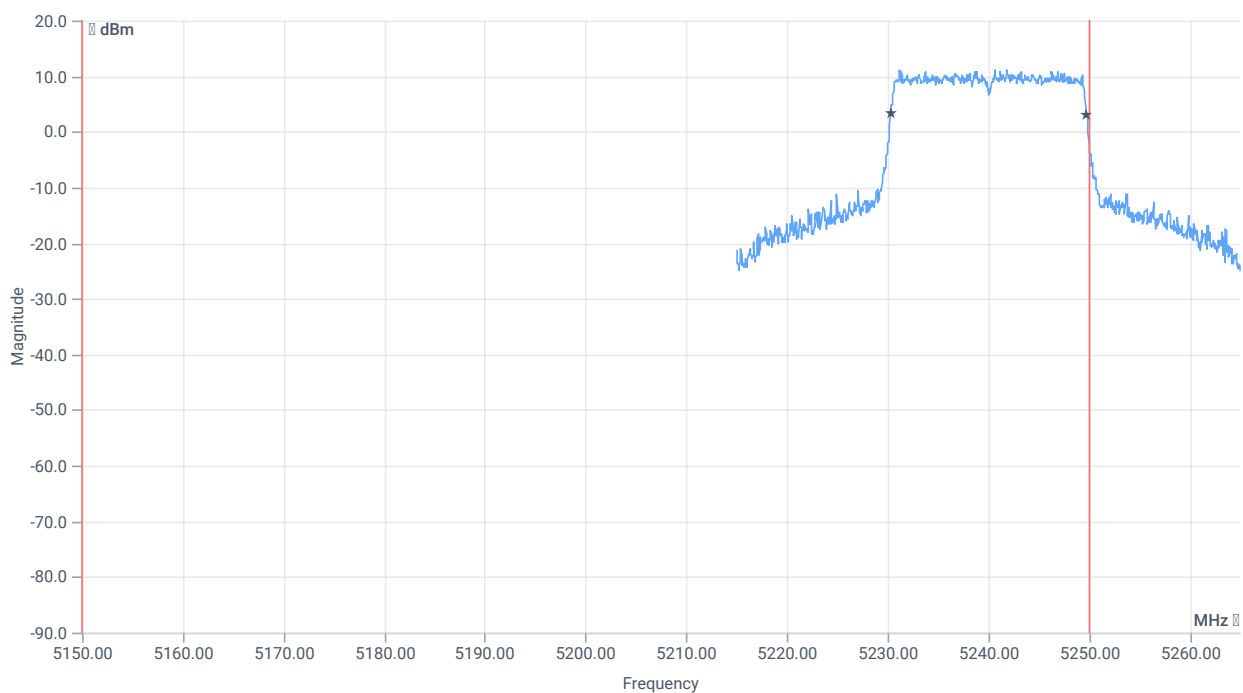


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.481	MHz	INFO
T1 99%	5150.000000	---	5230.3097	MHz	PASS
T2 99%	---	5250.000000	5249.7902	MHz	PASS

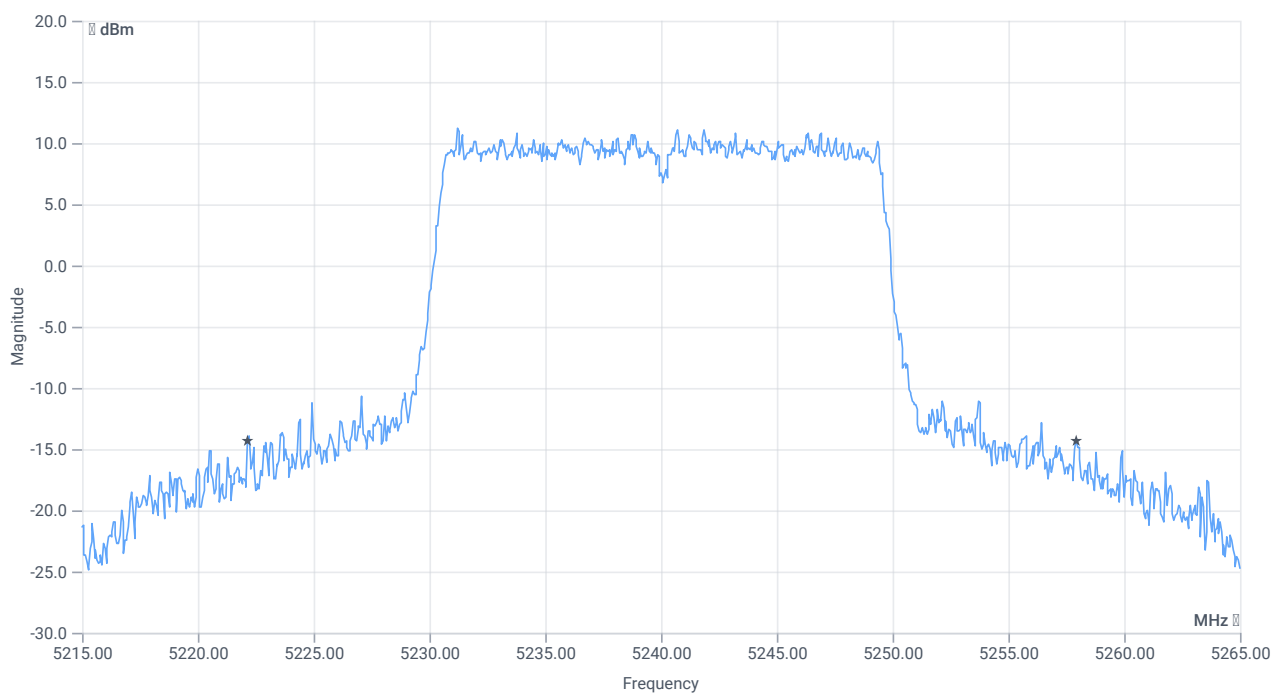

BW 26dB

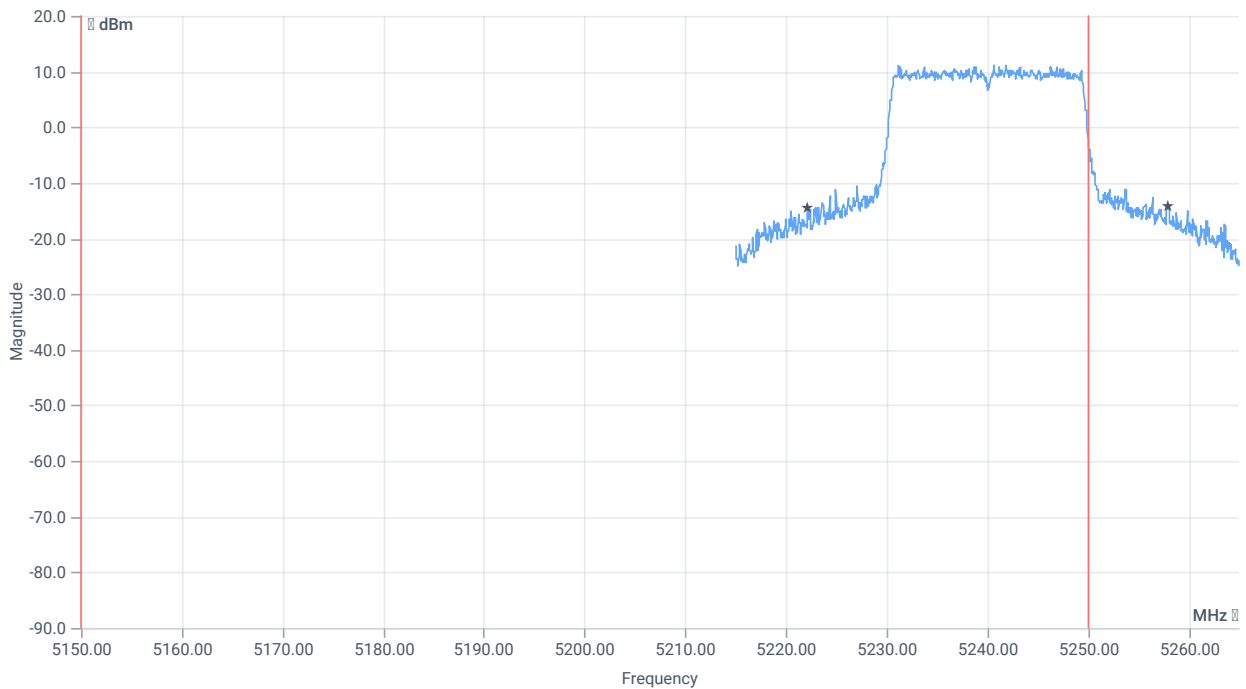

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	35.8	MHz	INFO
T1 26dB	5150.000000	---	5222.1500	MHz	PASS
T2 26dB	---	5250.000000	5257.9500	MHz	DFS required

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 14:03:19
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA Scan ax-HE20 U-NII-2A
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 14:03:19
Message	set WLAN5Gx to ax-HE20 U-NII-2A, Frequency [MHz] 5260 ,

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:04:00
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5260 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.24	dBm	INFO
Ref. Frequency	---	---	5256.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

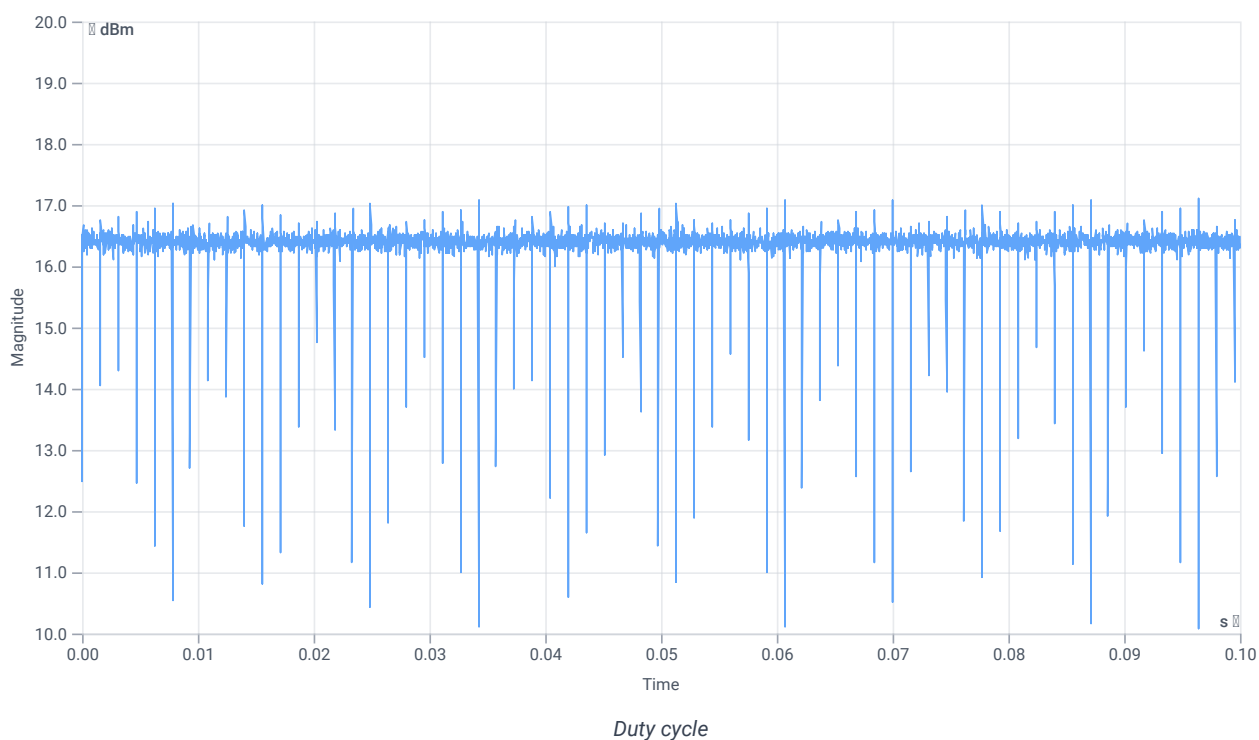

Evaluation Bandwidth

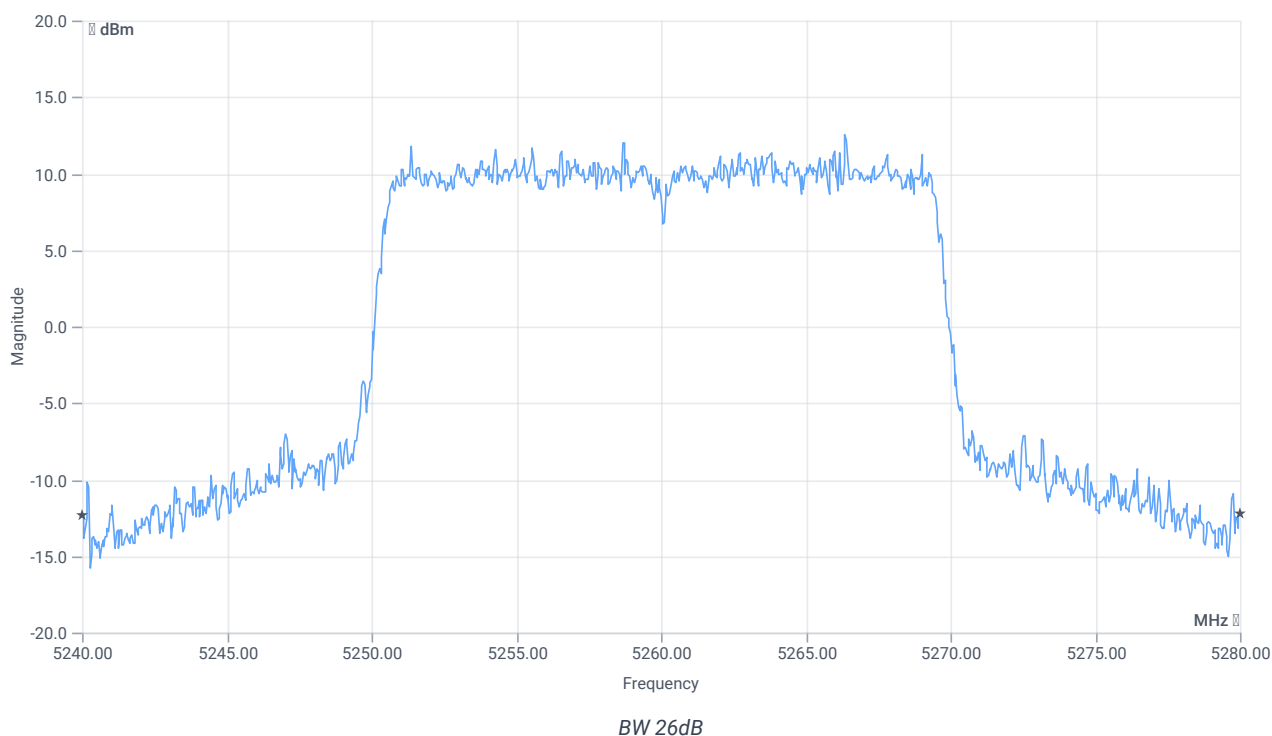


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5240.0000	MHz	INFO
T2 26dB	---	---	5280.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.24 16.34 25
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

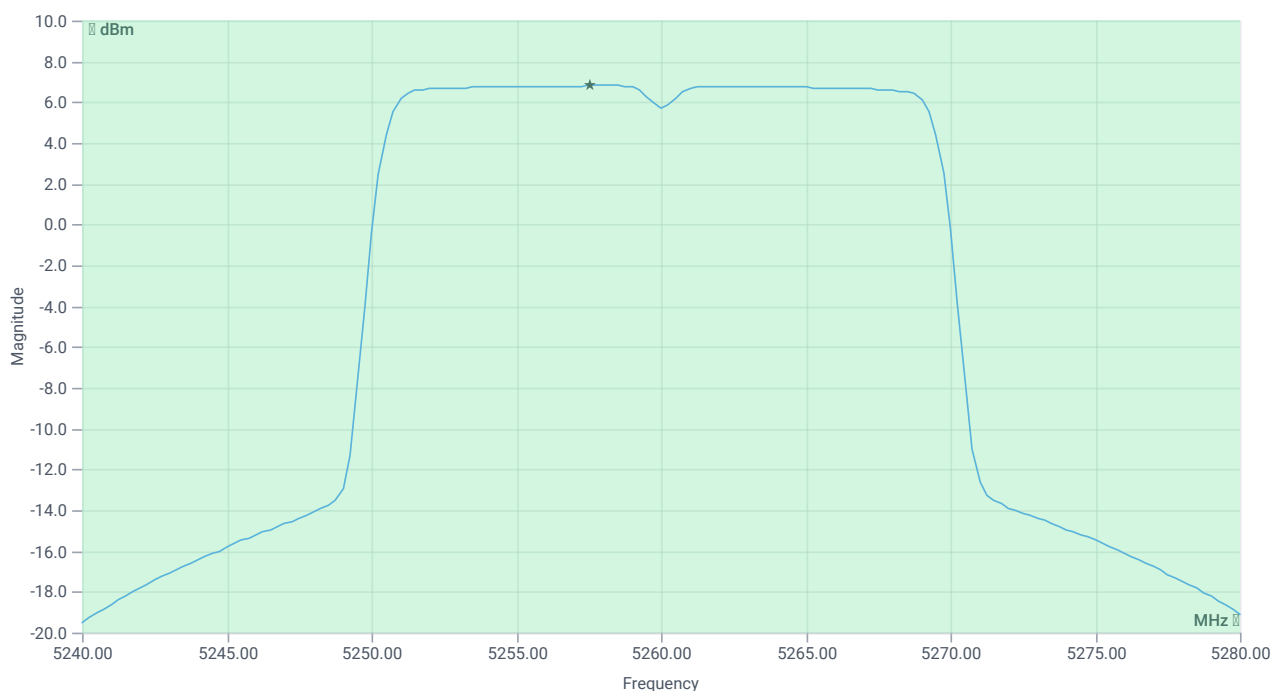

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.25	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	19.25	dBm	PASS
Limit: 11 dBm + 10 log 40					
Max Output Power DC corrected	---	27.02	19.25	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	6.81	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	6.81	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:05:27
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5260 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.23	dBm	INFO
Ref. Frequency	---	---	5254.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.23 16.34 25
Start [MHz] Stop [MHz]	5235.000 5285.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


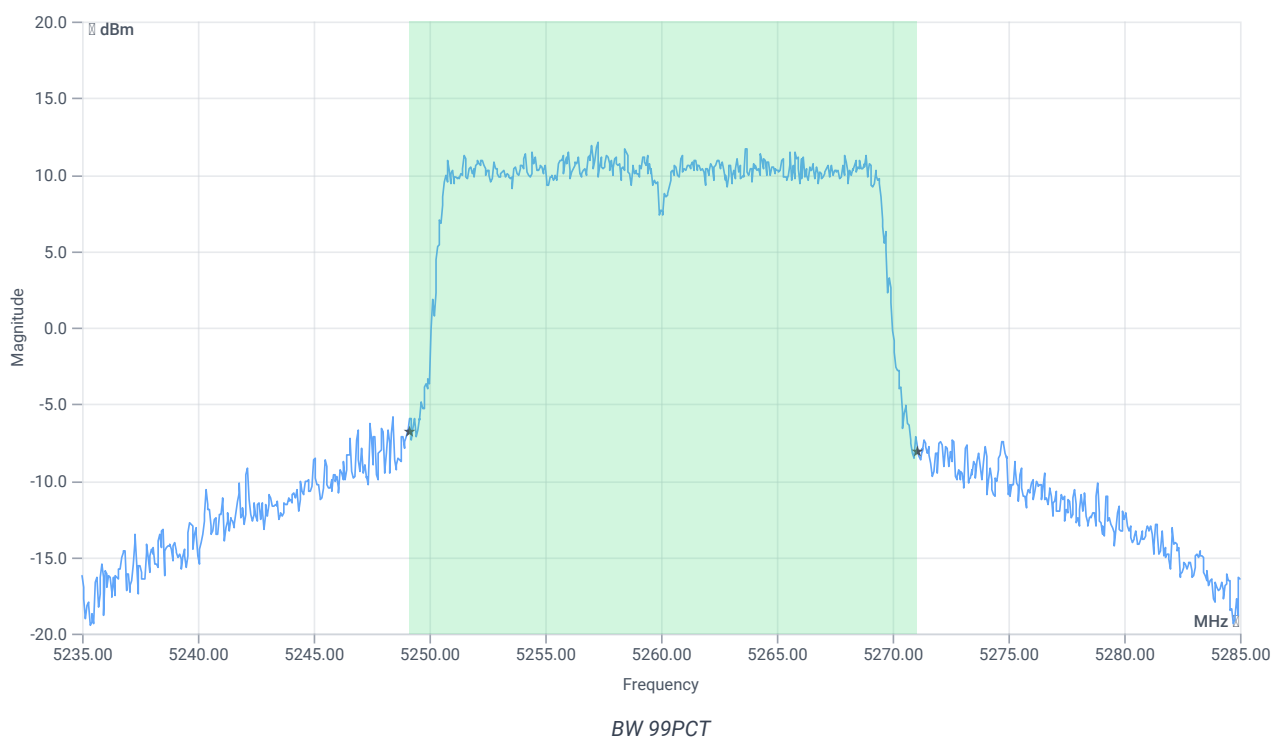


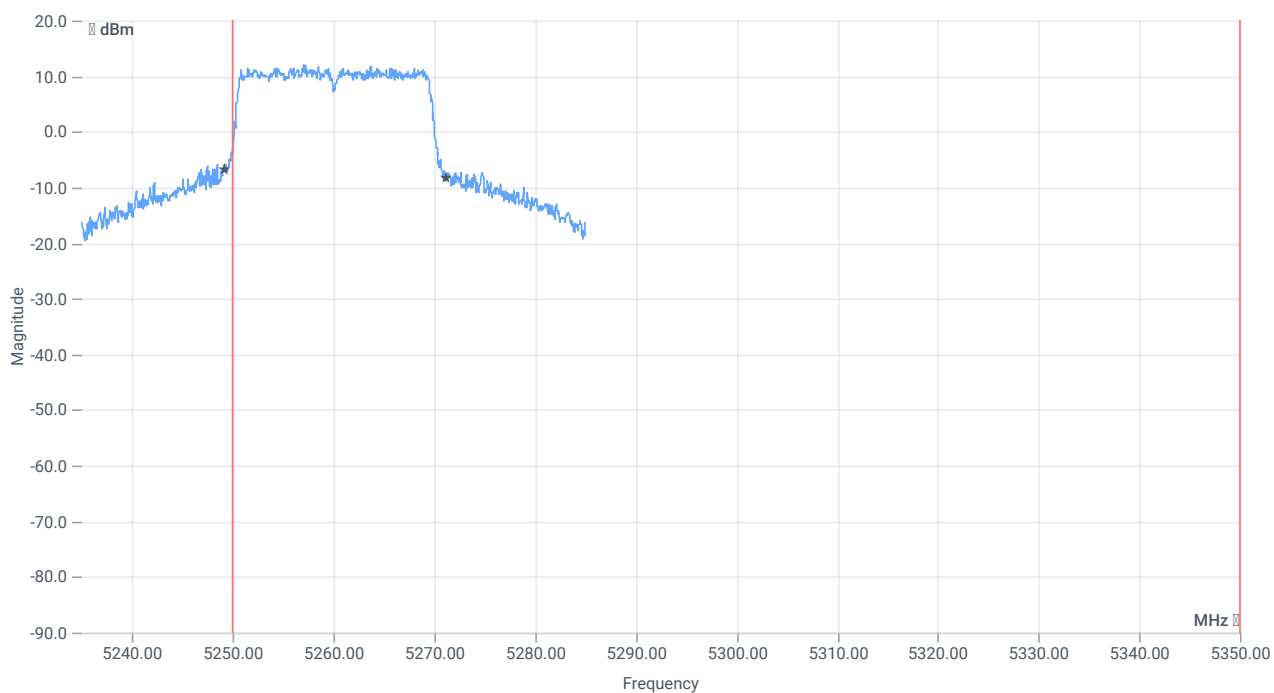

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	21.978	MHz	INFO
T1 99%	5250.000000	---	5249.1109	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5271.0889	MHz	PASS

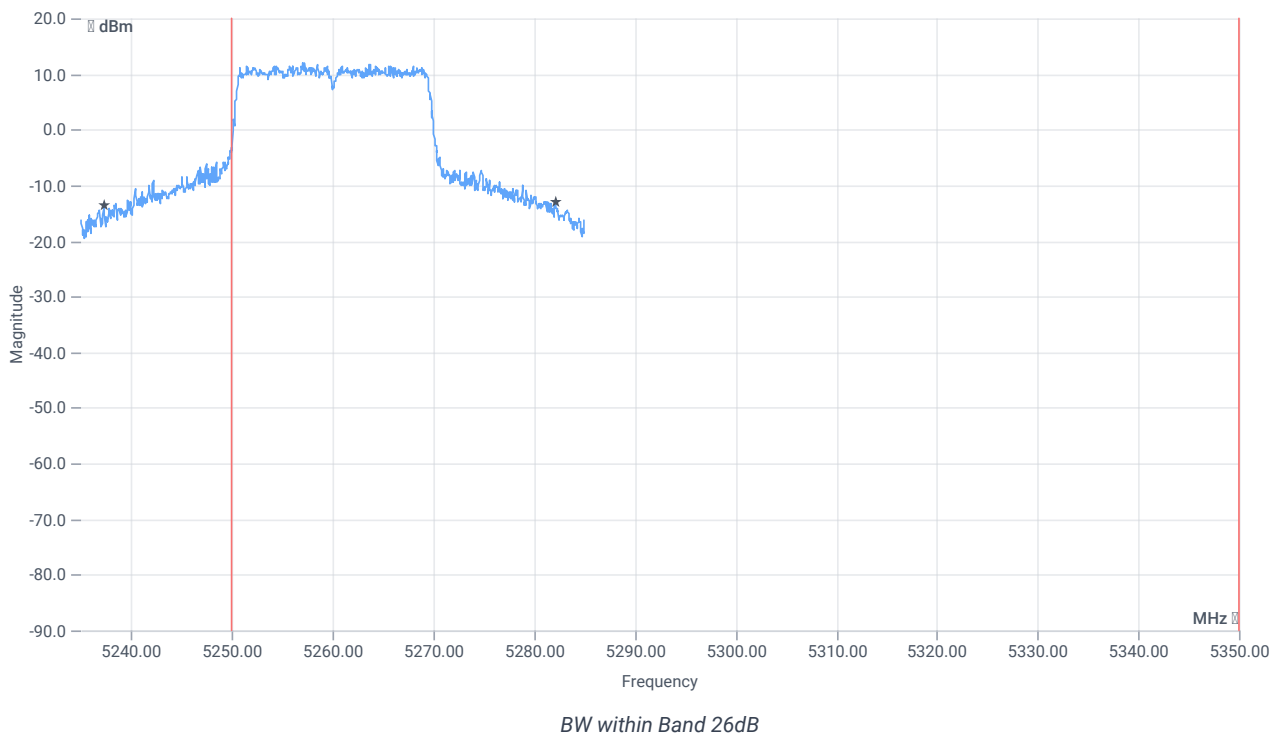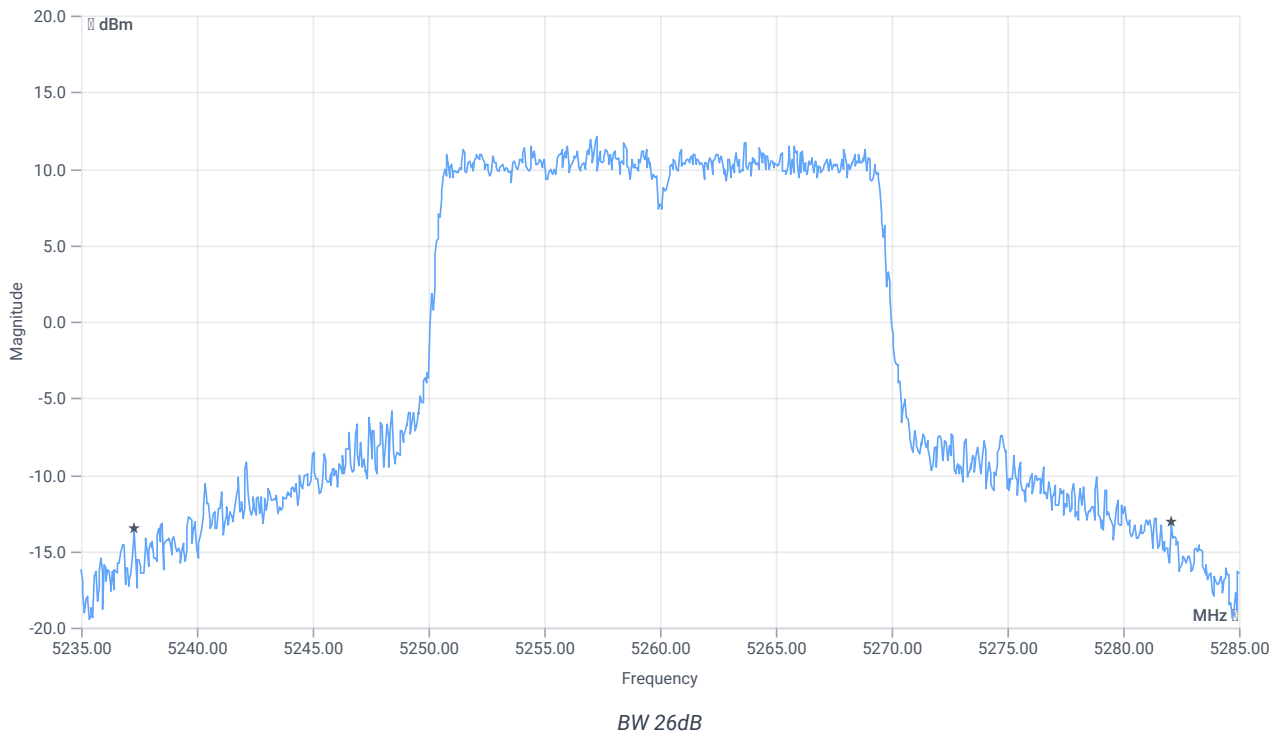

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	44.8	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5237.3000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5282.1000	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:05:57
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5260 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.89	dBm	INFO
Ref. Frequency	---	---	5265.790	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

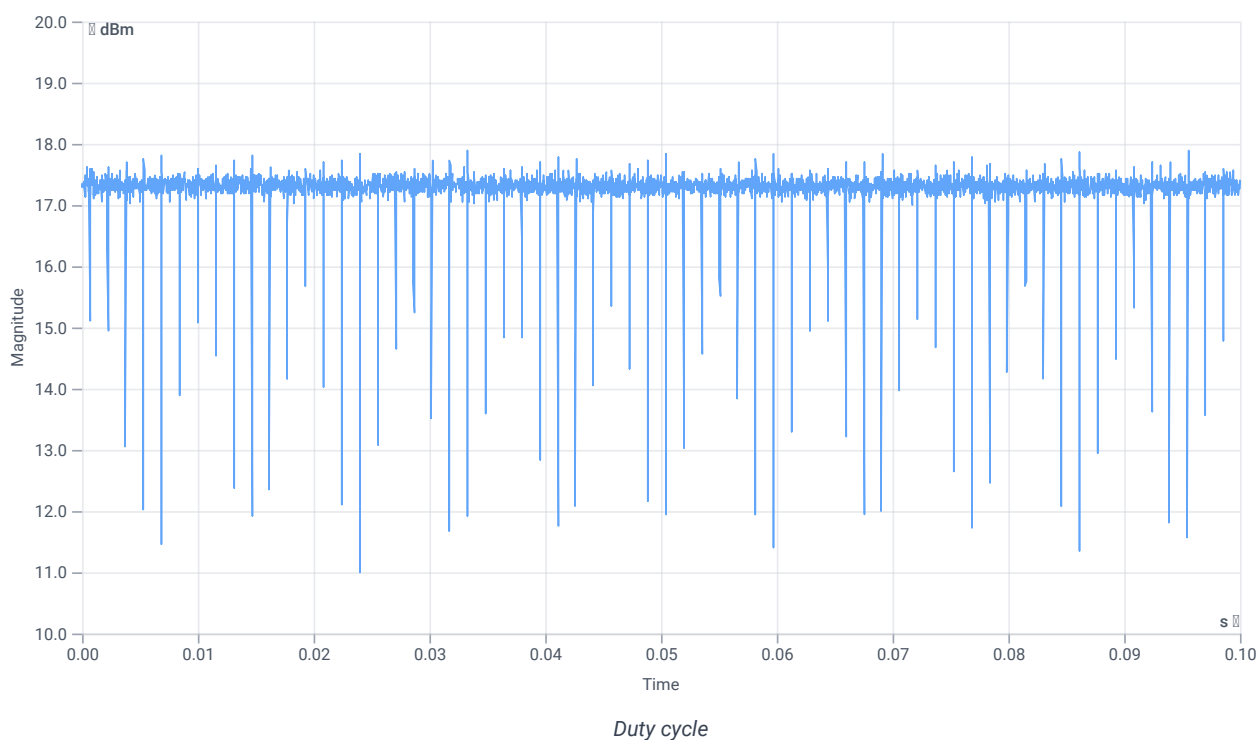

Evaluation Bandwidth

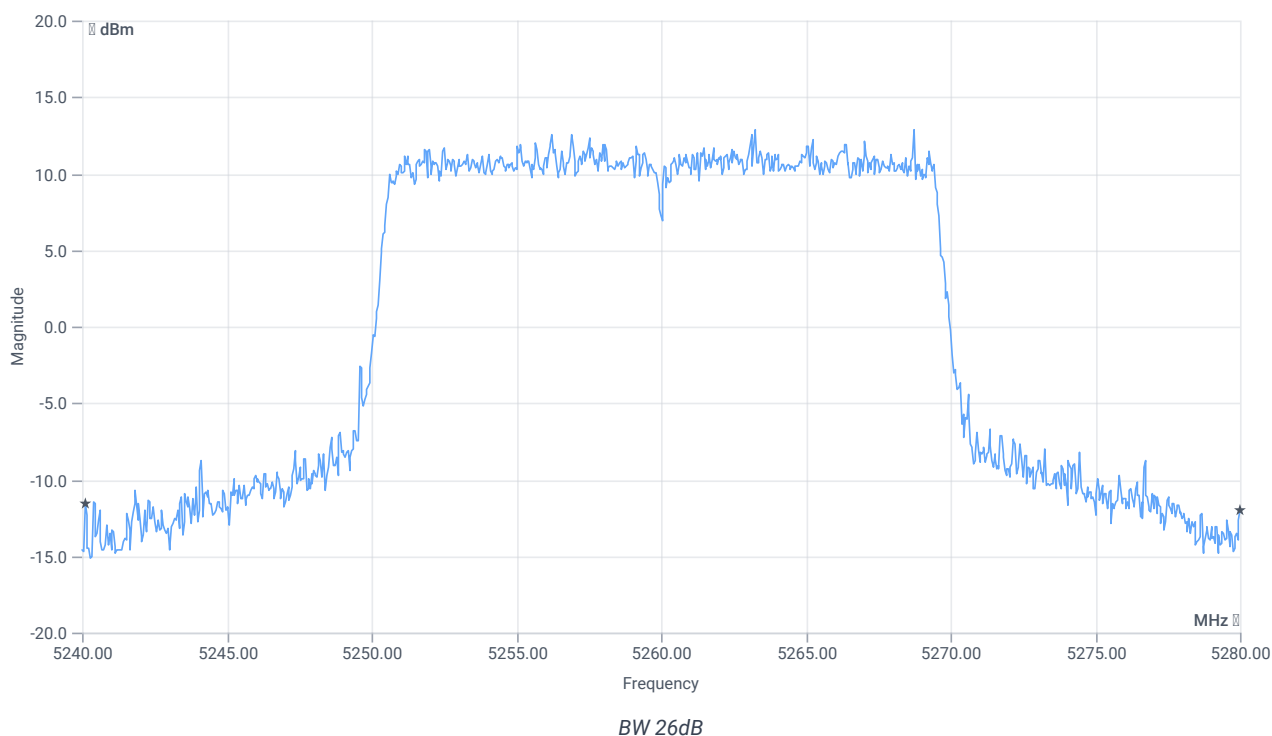


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.88	MHz	INFO
T1 26dB	---	---	5240.1200	MHz	INFO
T2 26dB	---	---	5280.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.89 16.34 30
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

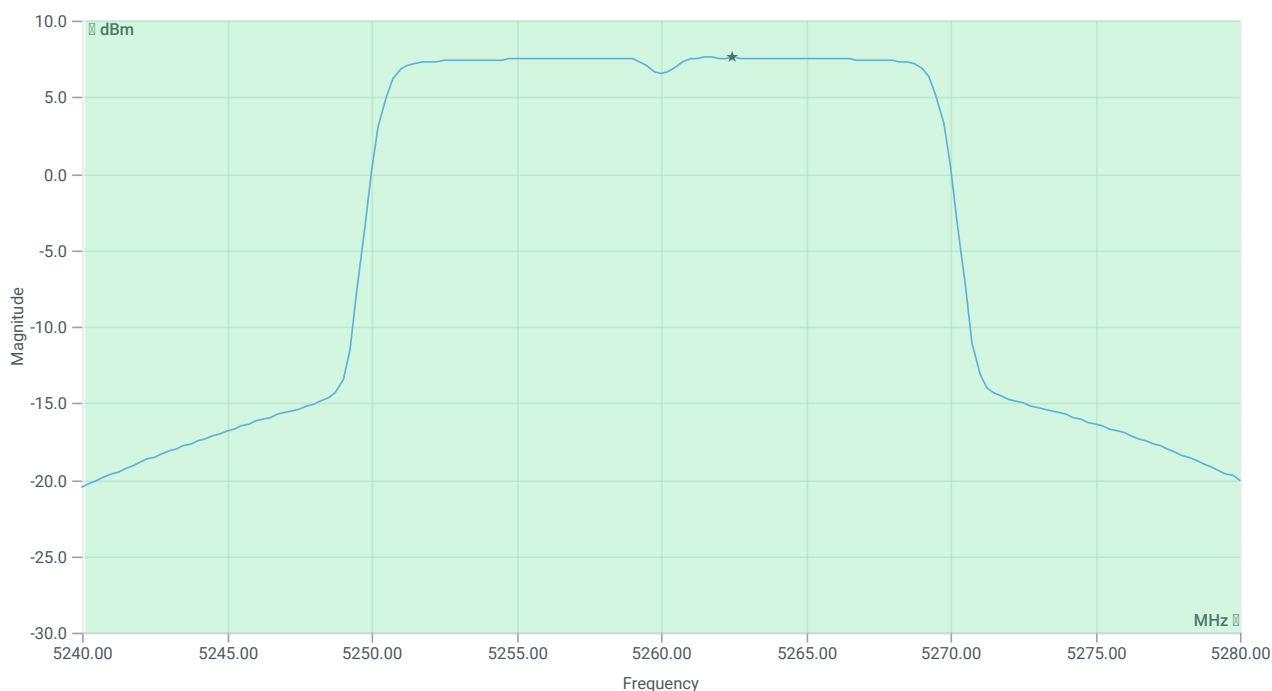

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.98	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	19.98	dBm	PASS
Limit: 11 dBm + 10 log 39.88					
Max Output Power DC corrected	---	27.01	19.98	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	7.58	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	7.58	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:07:24
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5260 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.54	dBm	INFO
Ref. Frequency	---	---	5256.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.54 16.34 25
Start [MHz] Stop [MHz]	5235.000 5285.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


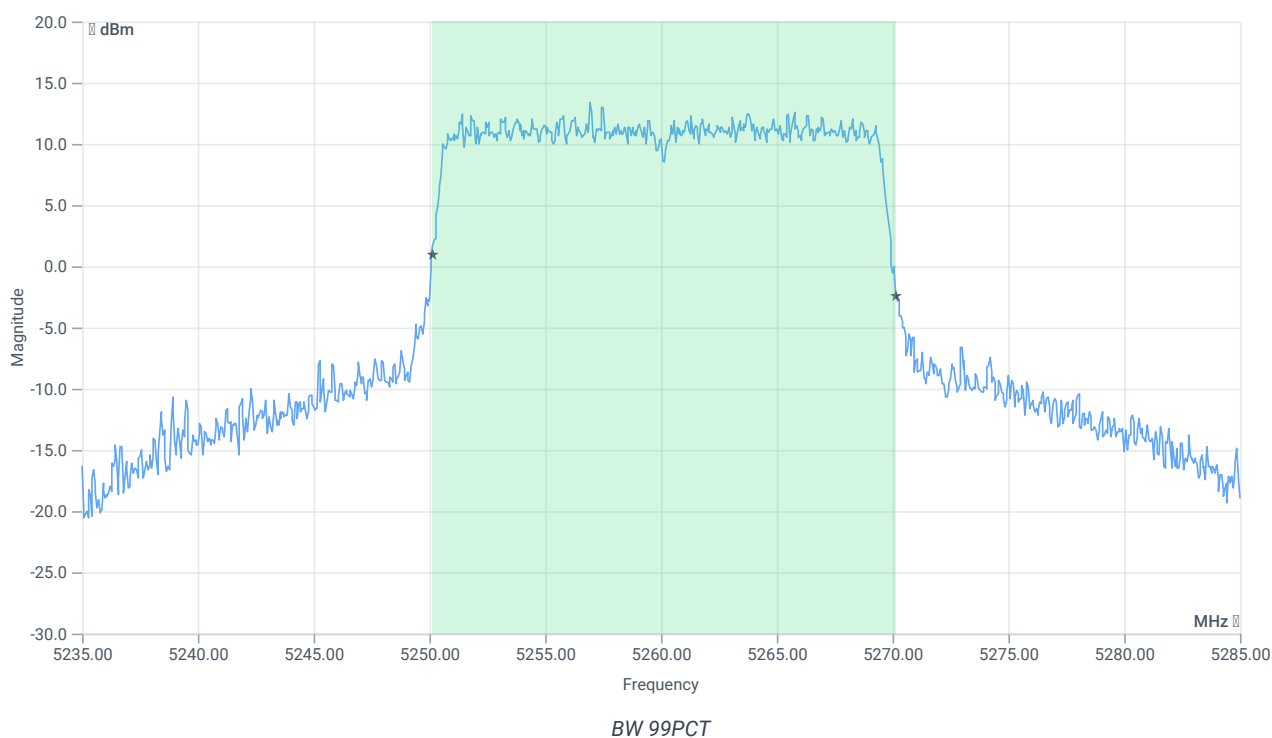


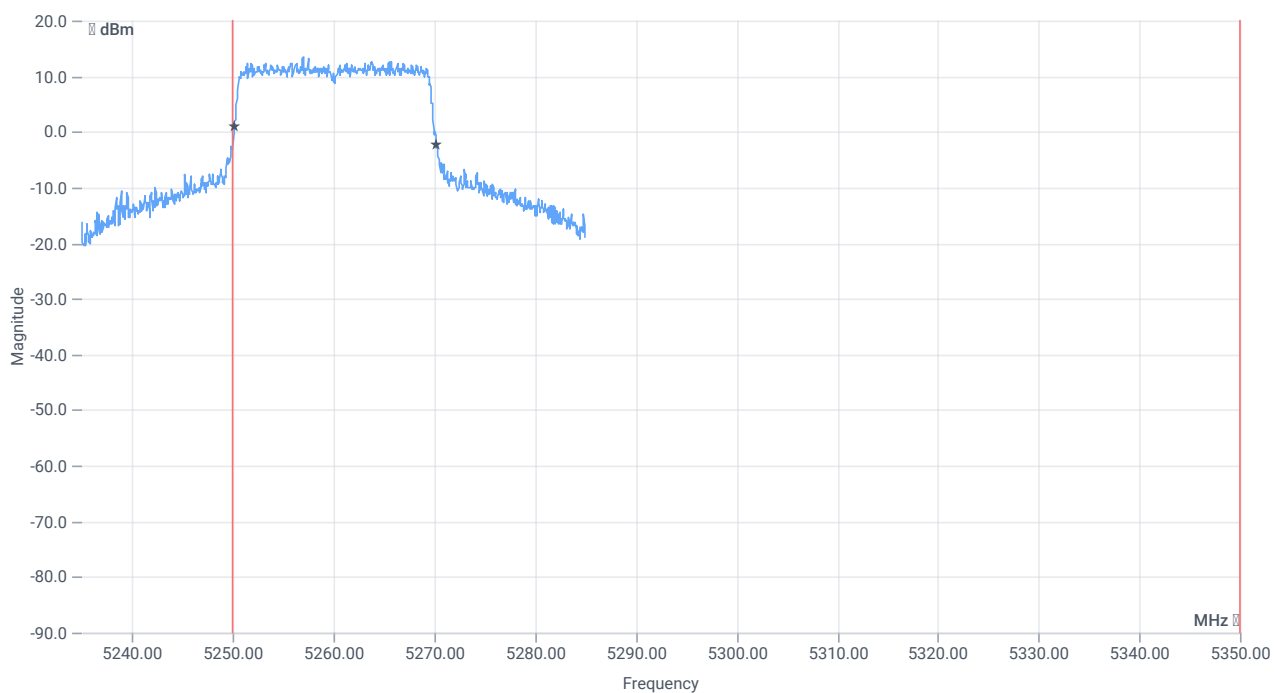

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	20.030	MHz	INFO
T1 99%	5250.000000	---	5250.1099	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5270.1399	MHz	PASS

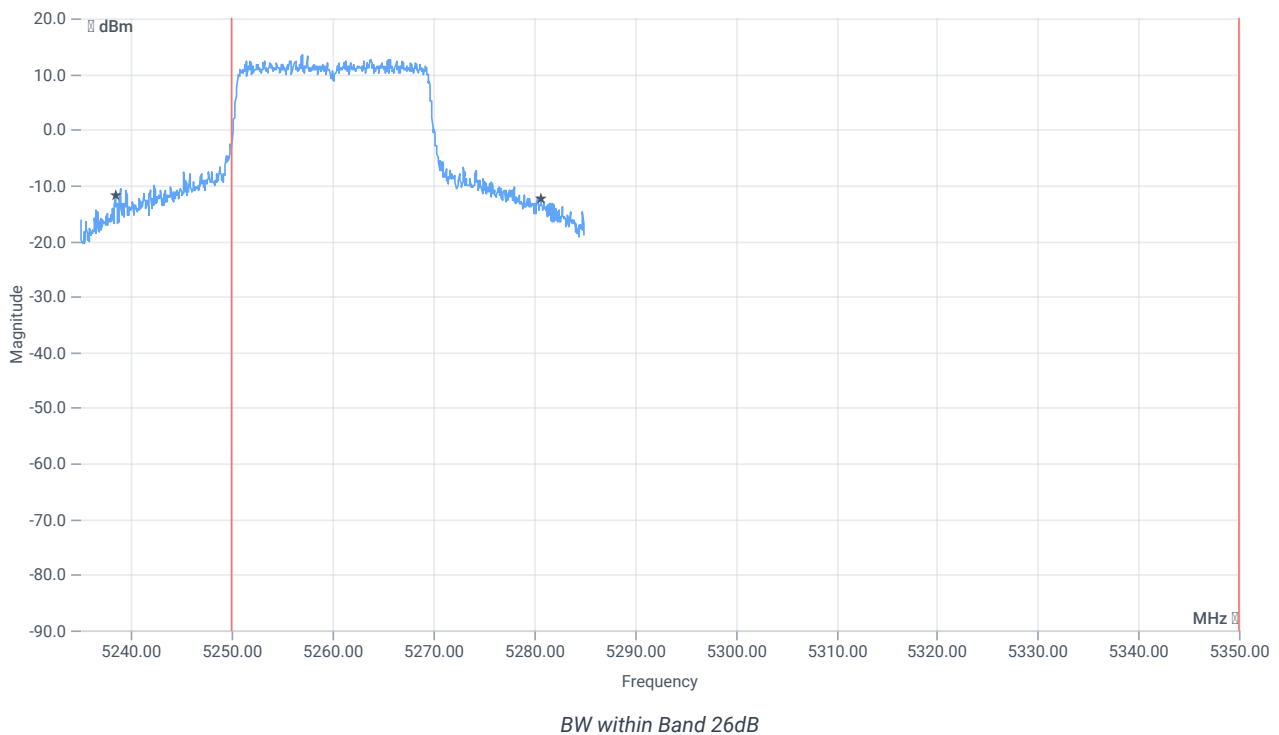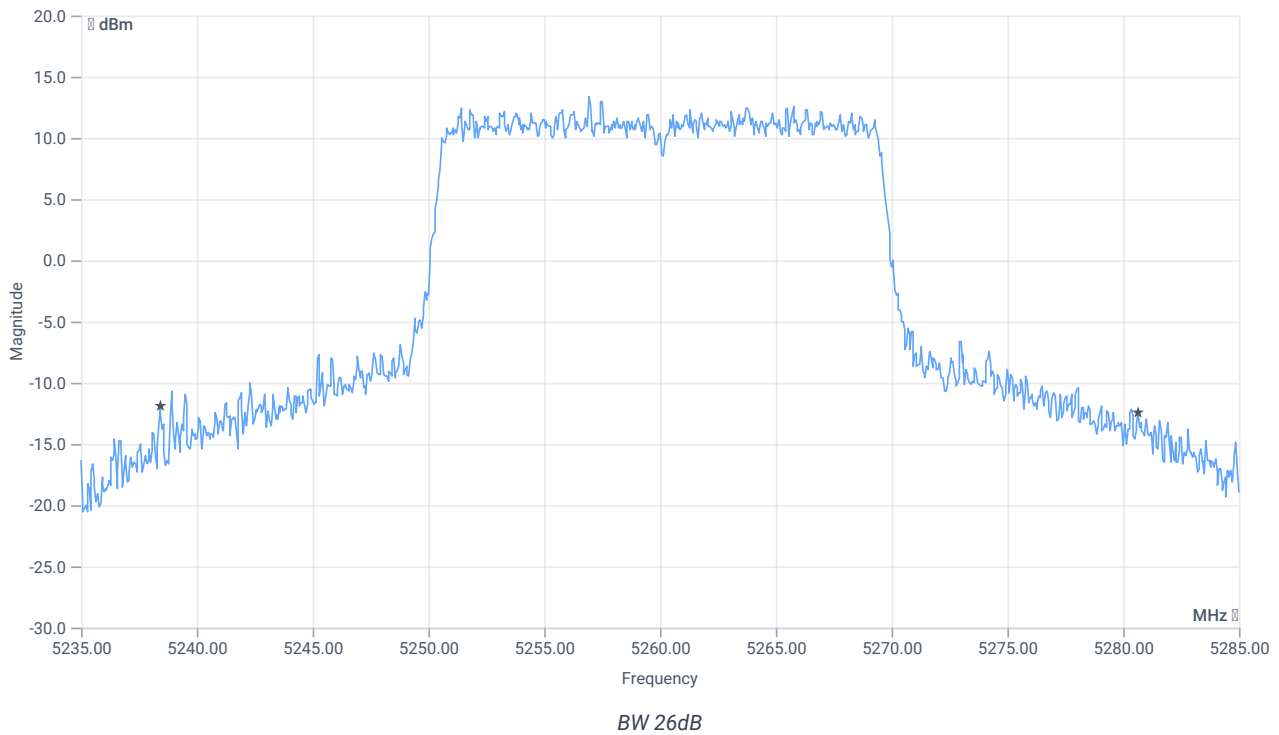

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.25	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5238.4000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5280.6500	MHz	PASS

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 14:07:54
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA Scan ax-HE20 U-NII-2A
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 14:07:55
Message	set WLAN5Gx to ax-HE20 U-NII-2A, Frequency [MHz] 5280 ,

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:14:56
Ambit temp [°C] humidity [rel%]	27.0 50
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5280 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.29	dBm	INFO
Ref. Frequency	---	---	5282.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

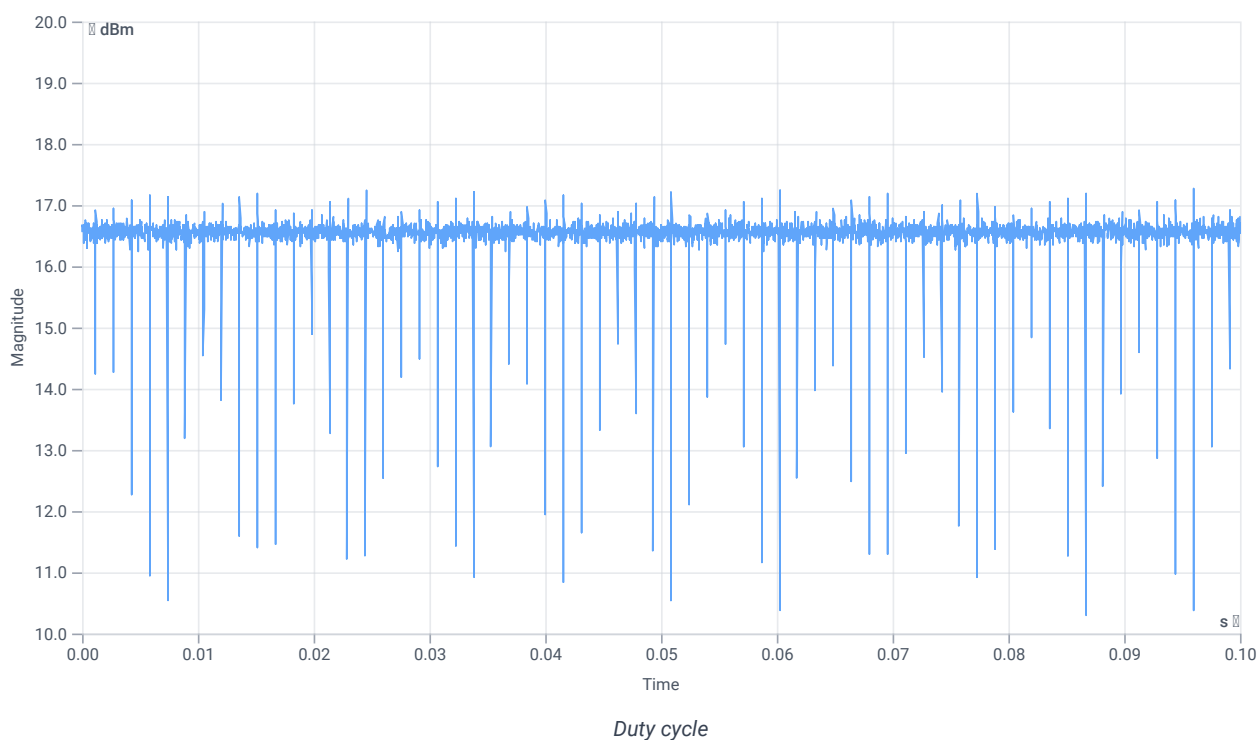

Evaluation Bandwidth

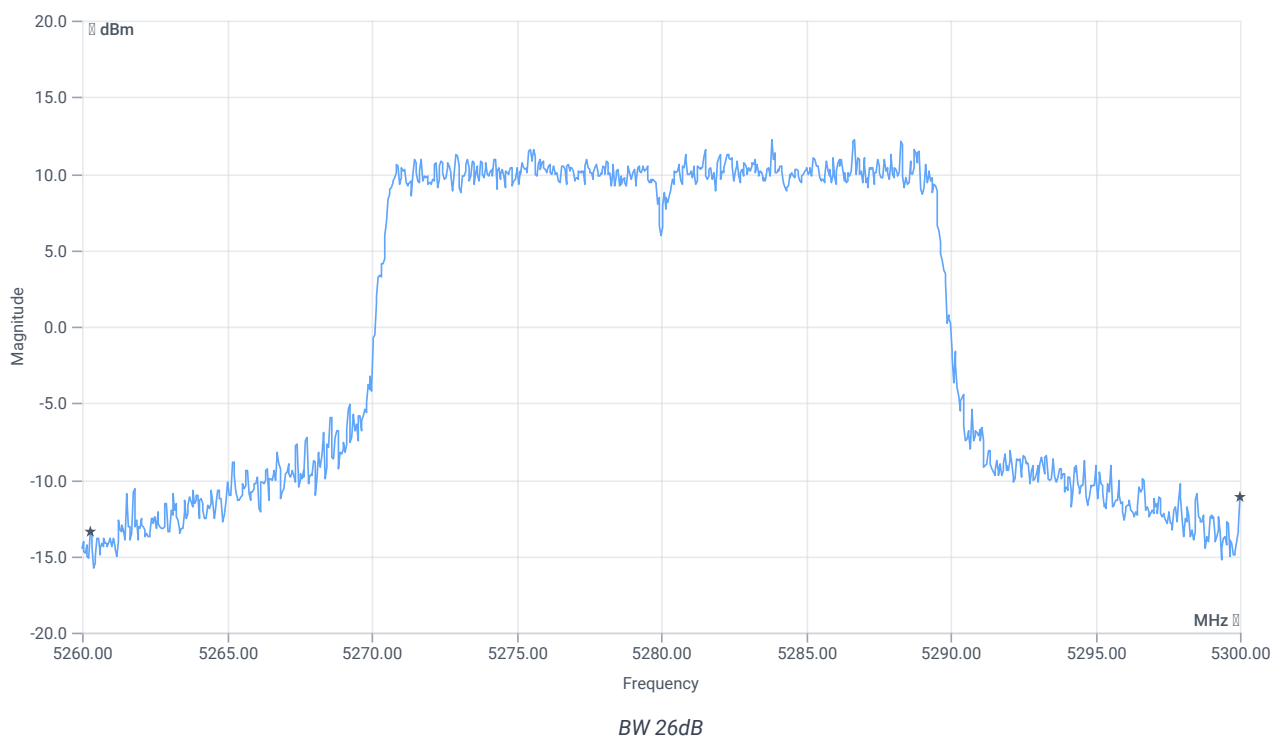


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.72	MHz	INFO
T1 26dB	---	---	5260.2800	MHz	INFO
T2 26dB	---	---	5300.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.29 16.1 30
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

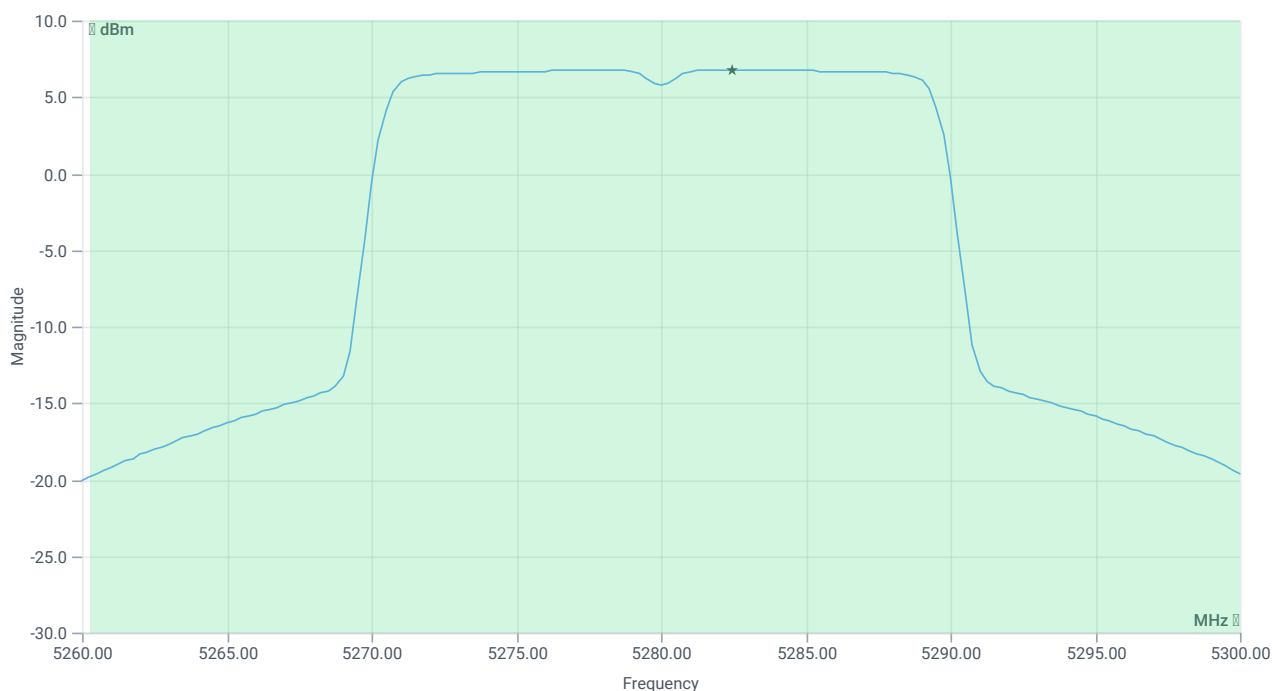

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.17	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	19.17	dBm	PASS
Limit: 11 dBm + 10 log 39.72					
Max Output Power DC corrected	---	26.99	19.17	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	6.79	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	6.79	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:16:23
Ambit temp [°C] humidity [rel%]	27.0 50
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5280 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.16	dBm	INFO
Ref. Frequency	---	---	5285.590	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.16 16.1 25
Start [MHz] Stop [MHz]	5255.000 5305.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


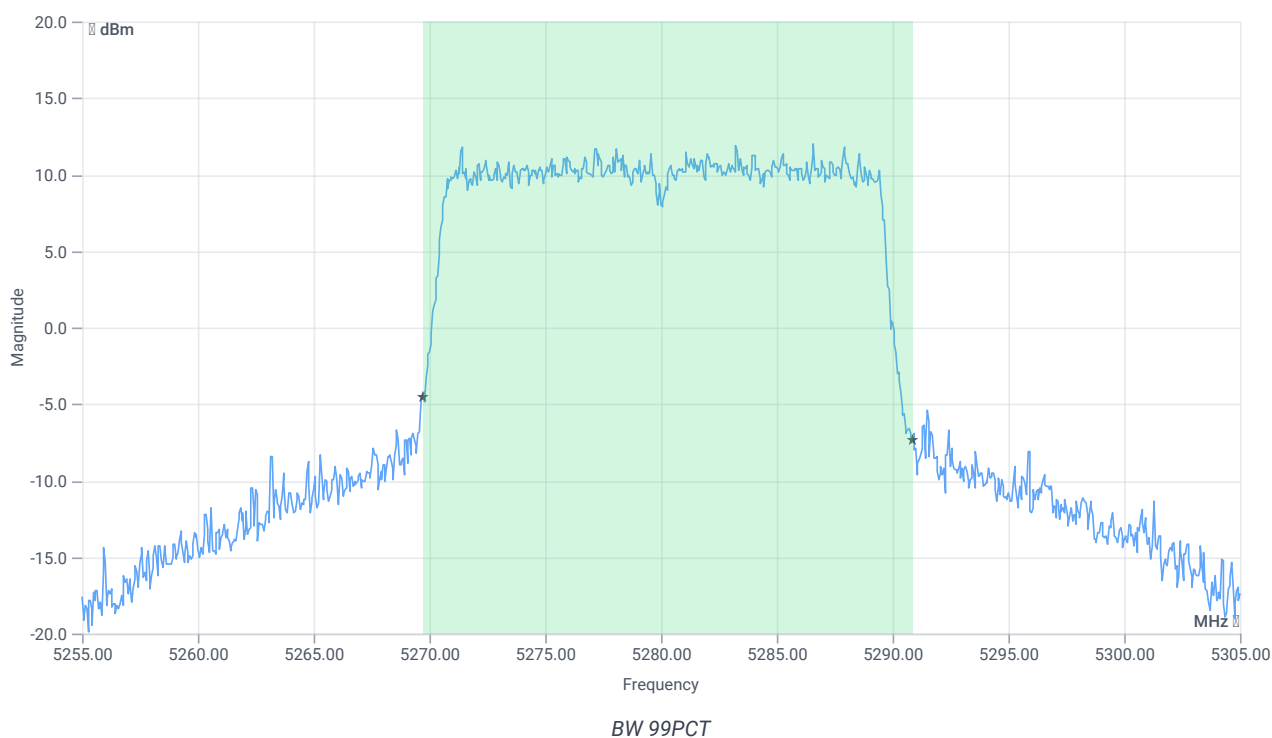


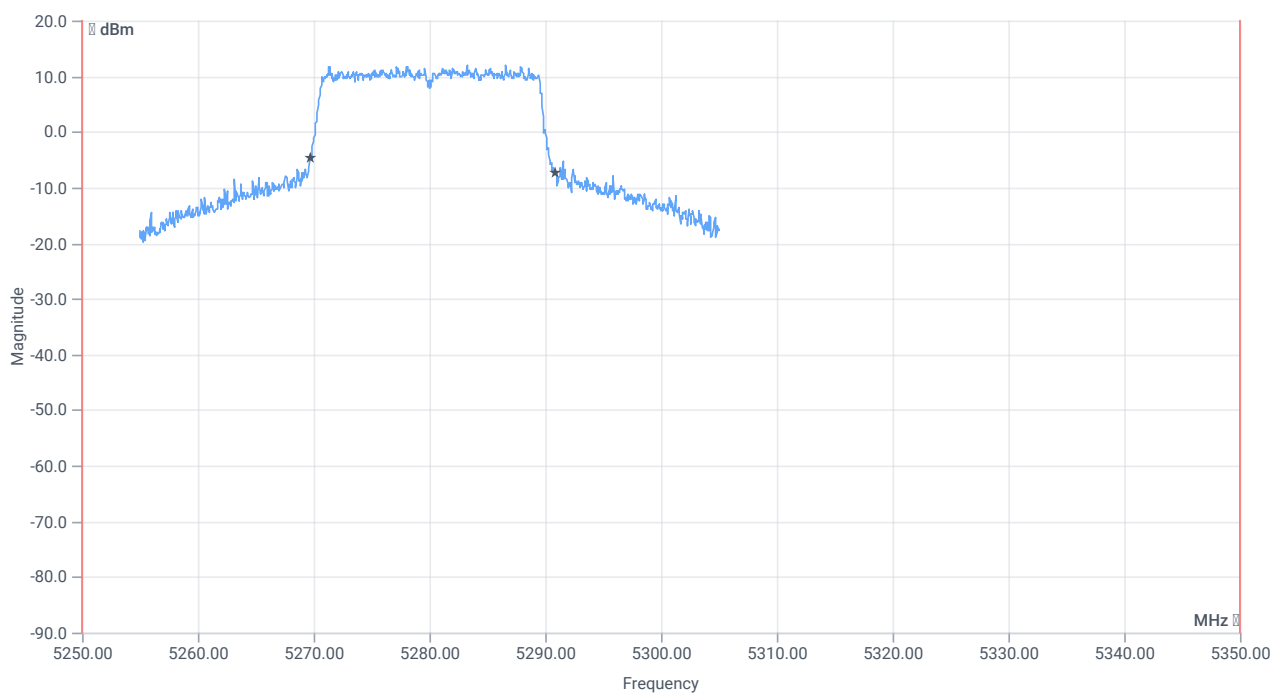

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	21.129	MHz	INFO
T1 99%	5250.000000	---	5269.7103	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5290.8392	MHz	PASS

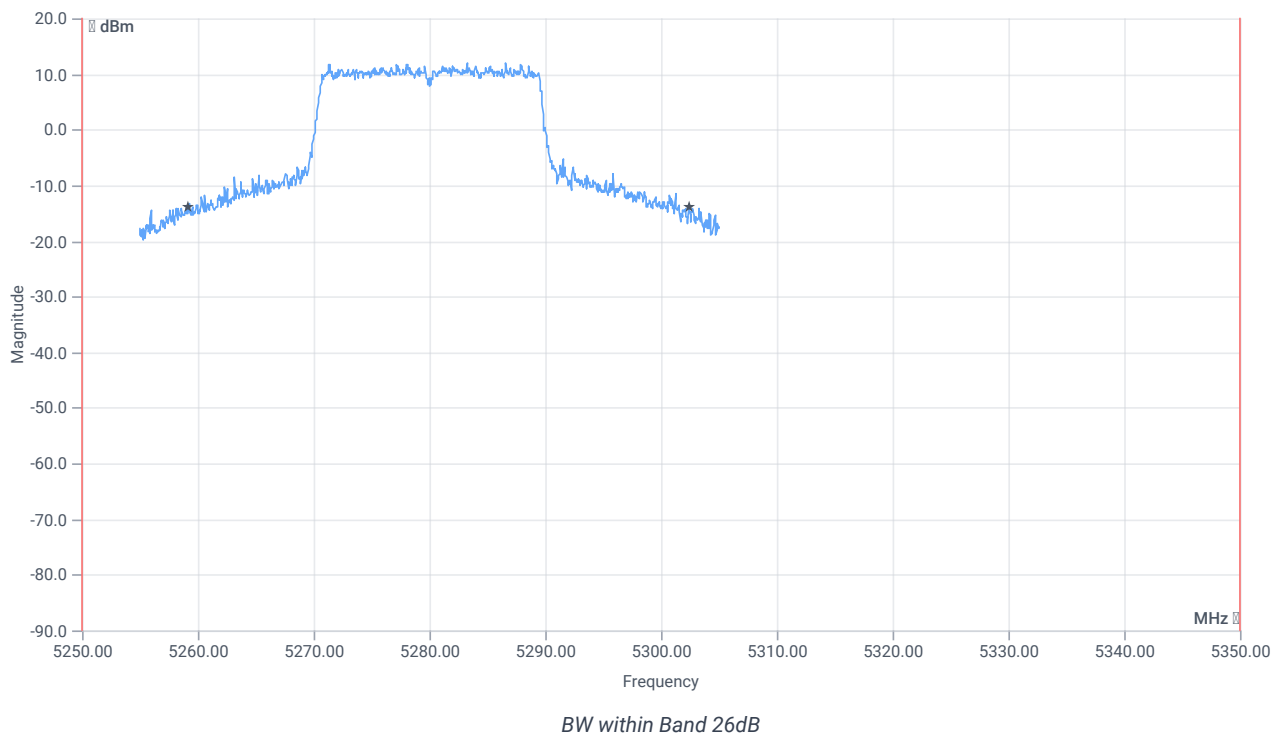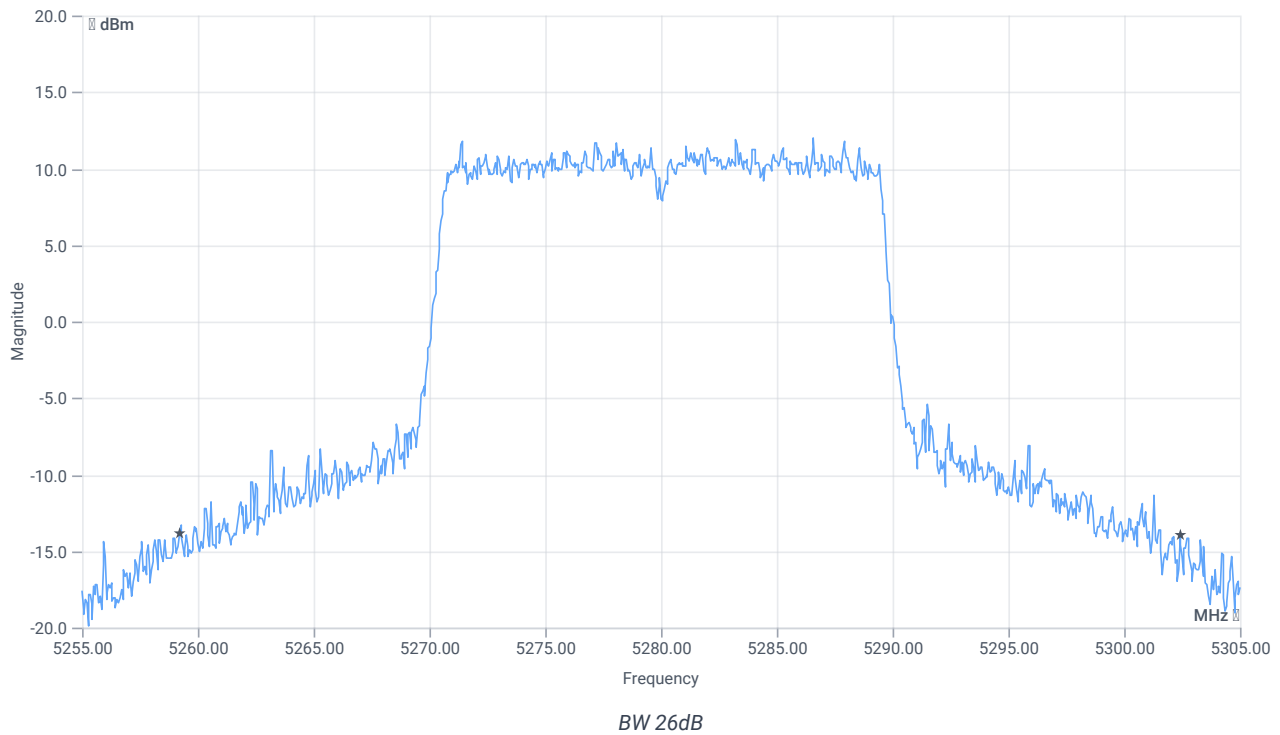

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	43.2	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5259.2000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5302.4000	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:16:53
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5280 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.68	dBm	INFO
Ref. Frequency	---	---	5288.990	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

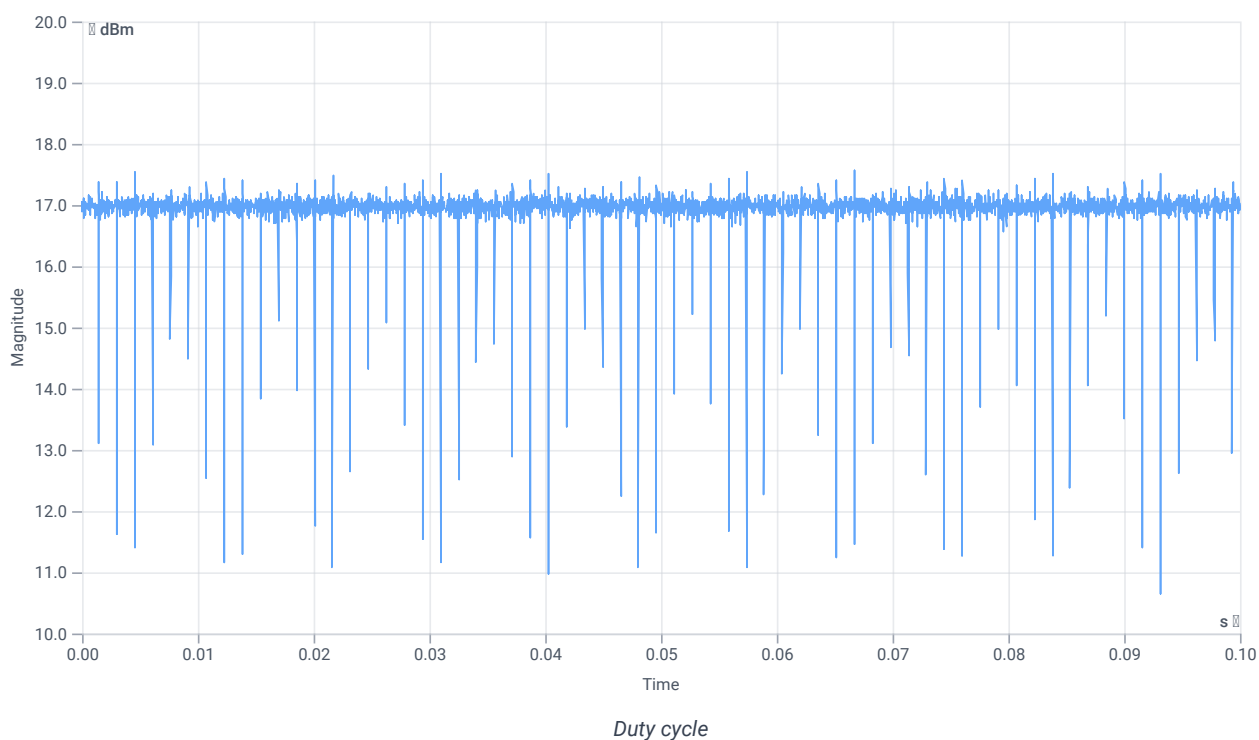

Evaluation Bandwidth

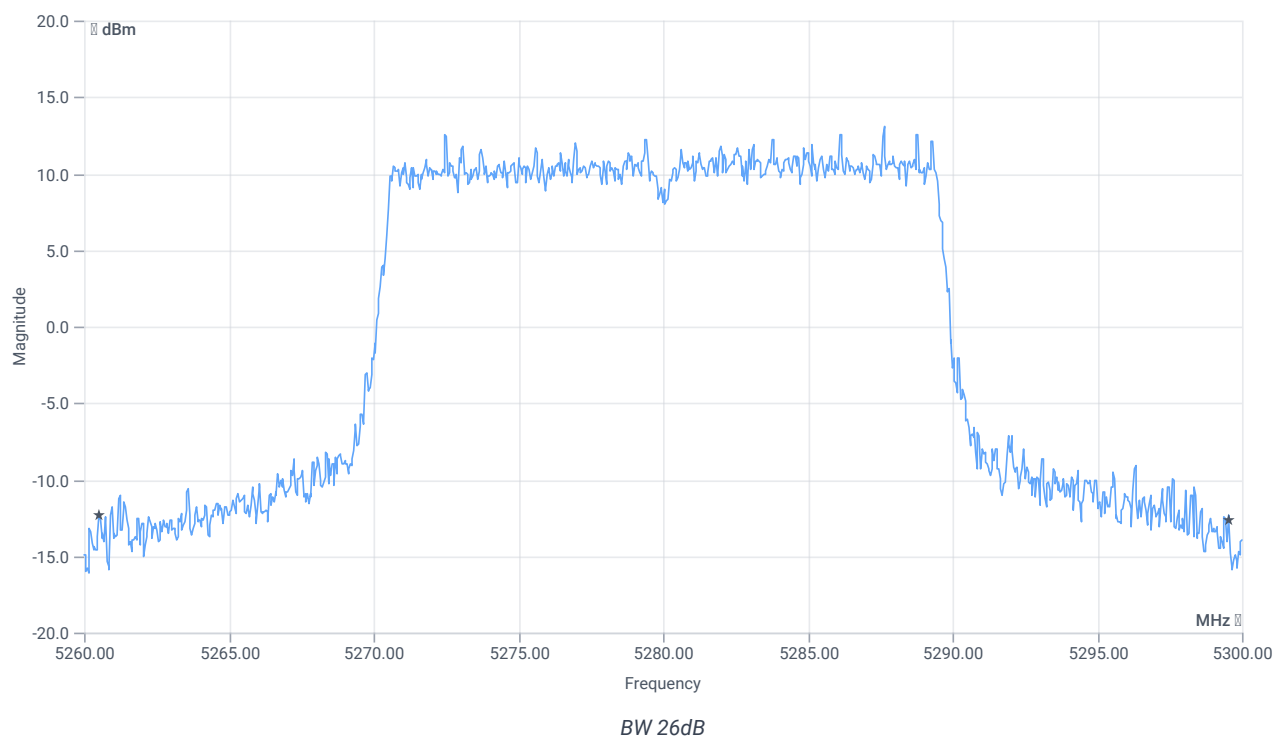


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.04	MHz	INFO
T1 26dB	---	---	5260.5200	MHz	INFO
T2 26dB	---	---	5299.5600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.68 16.1 30
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

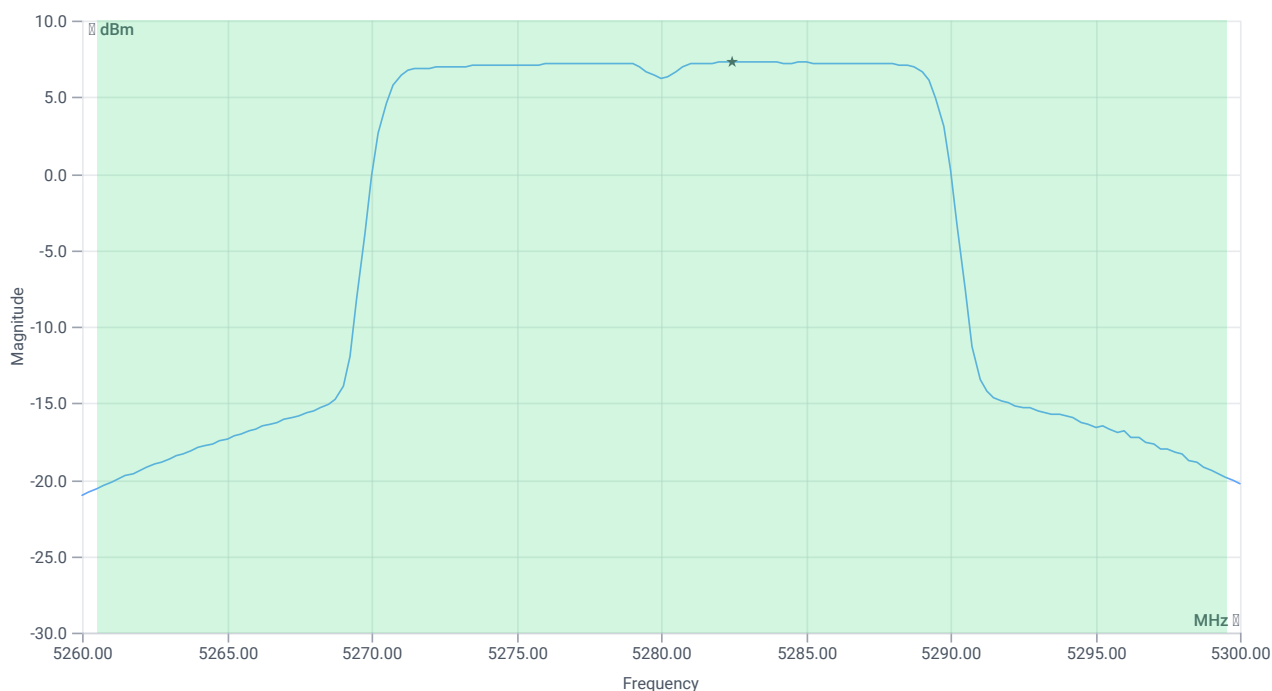

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.65	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	19.65	dBm	PASS
Limit: 11 dBm + 10 log 39.04					
Max Output Power DC corrected	---	26.92	19.65	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	7.28	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	7.28	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:18:21
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5280 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.58	dBm	INFO
Ref. Frequency	---	---	5287.790	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.58 16.1 25
Start [MHz] Stop [MHz]	5255.000 5305.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


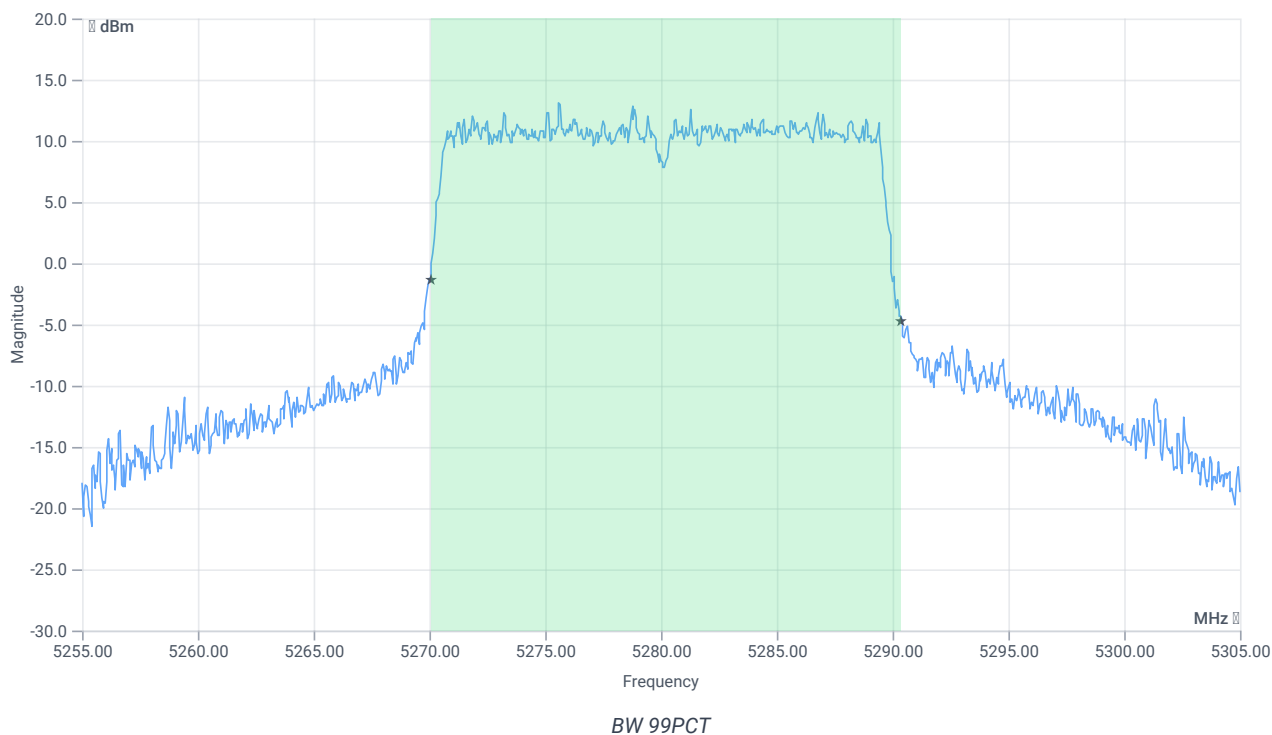


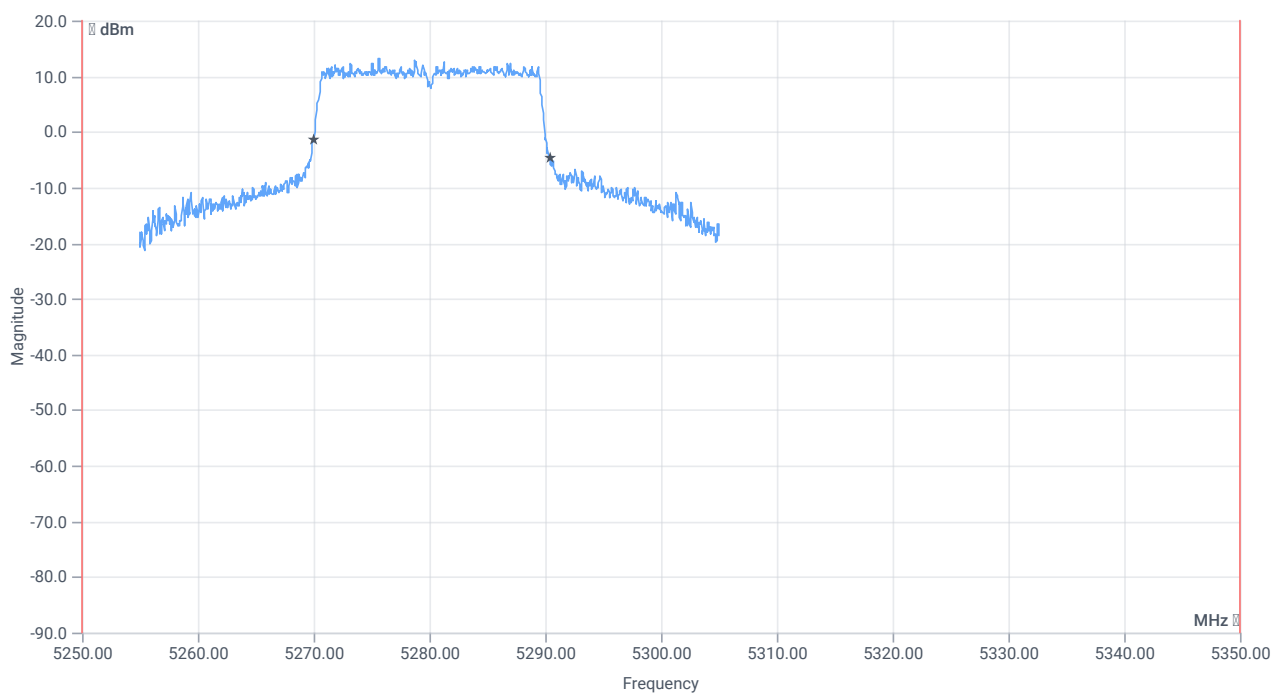

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	20.330	MHz	INFO
T1 99%	5250.000000	---	5270.0599	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5290.3896	MHz	PASS

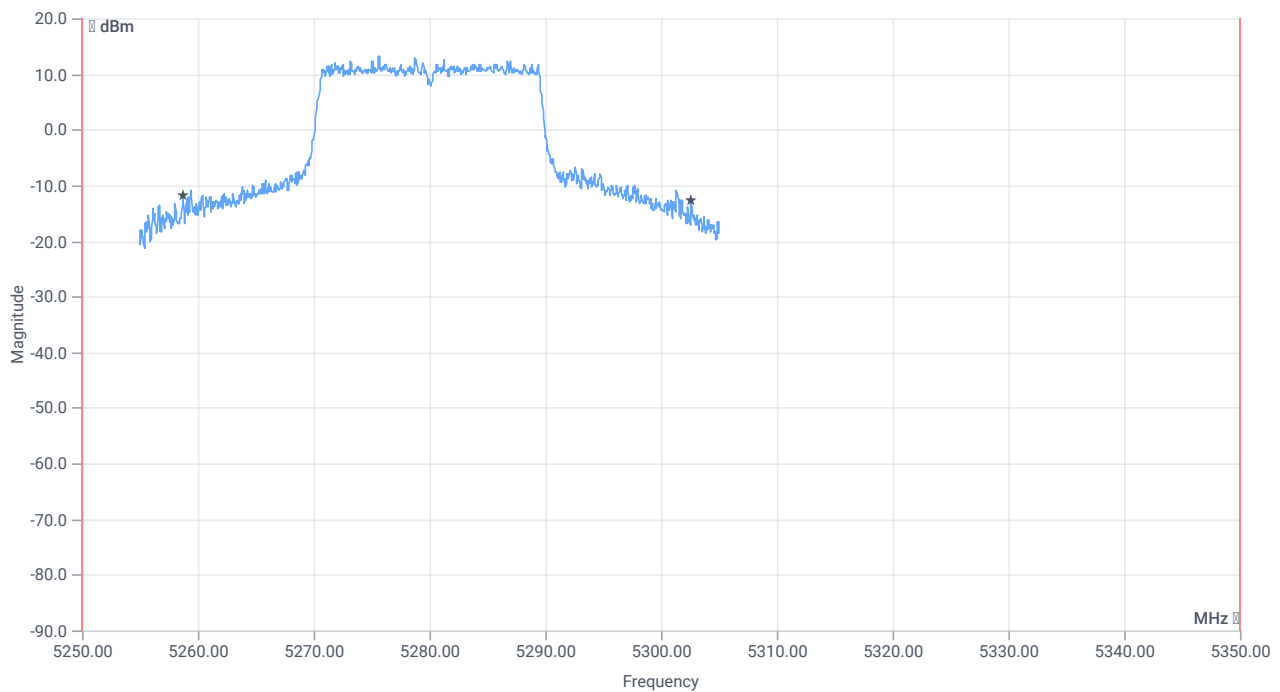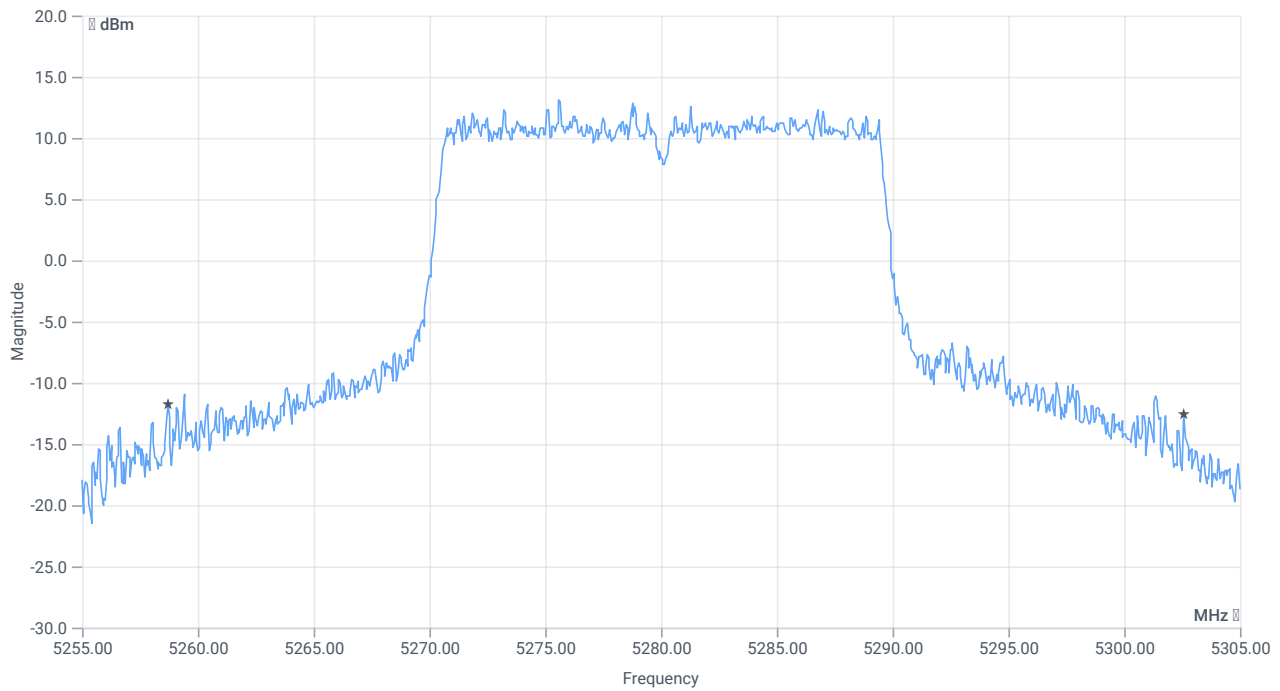

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	43.9	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5258.7000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5302.6000	MHz	PASS

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 14:18:51
Ambit temp [°C] humidity [rel%]	26.9 49
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA Scan ax-HE20 U-NII-2A
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 14:18:52
Message	set WLAN5Gx to ax-HE20 U-NII-2A, Frequency [MHz] 5320

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:31:20
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5320 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	13.64	dBm	INFO
Ref. Frequency	---	---	5324.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

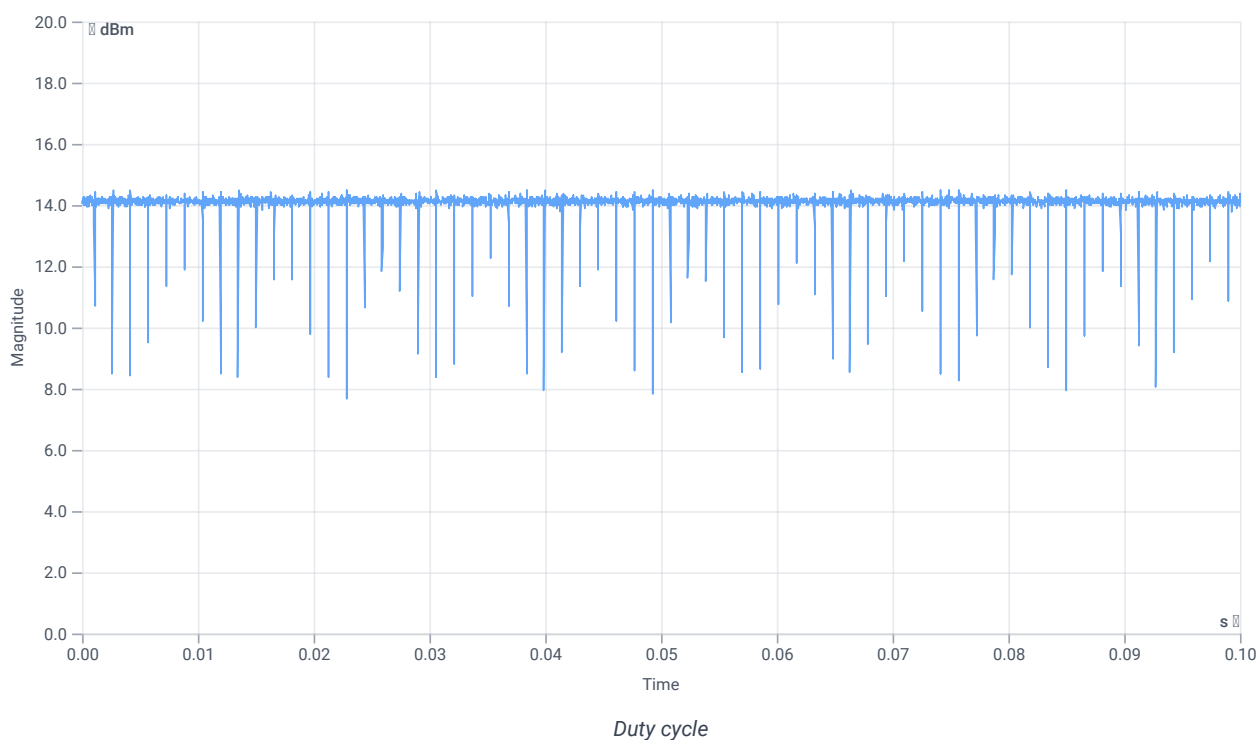

Evaluation Bandwidth

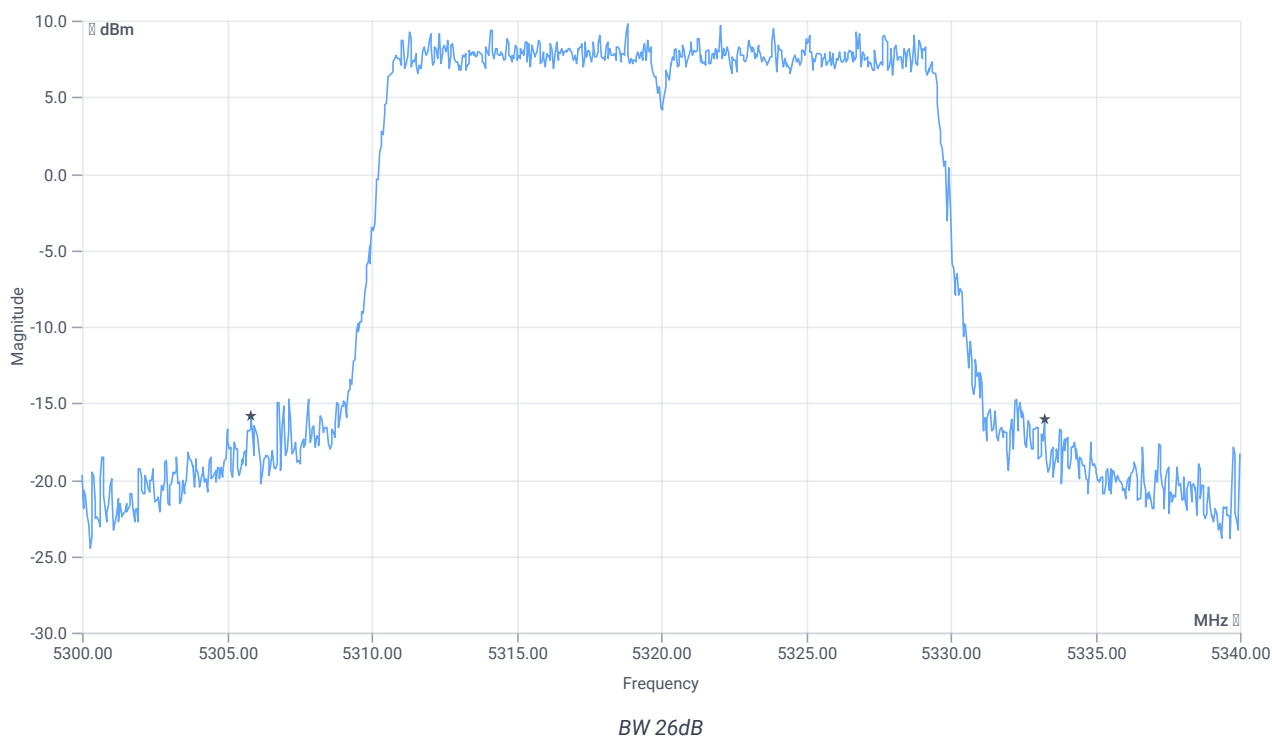


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	27.4	MHz	INFO
T1 26dB	---	---	5305.8400	MHz	INFO
T2 26dB	---	---	5333.2400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.64 16.16 25
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

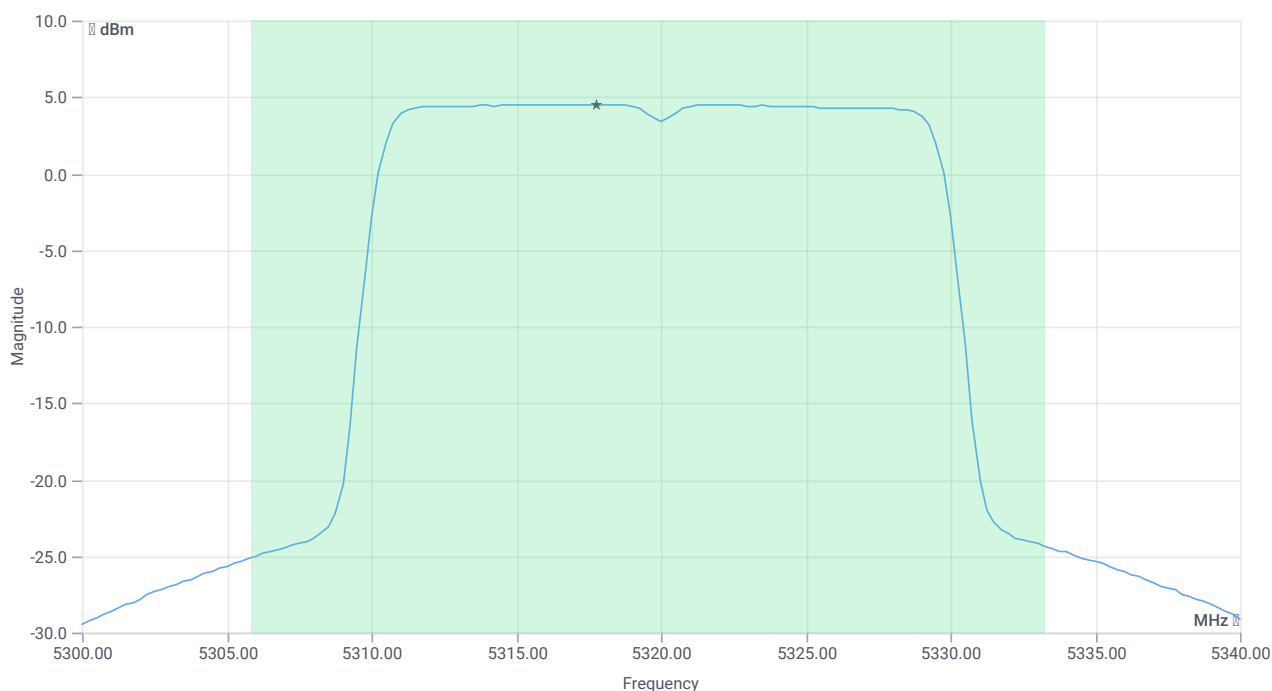

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	16.88	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	16.88	dBm	PASS
Limit: 11 dBm + 10 log 27.4					
Max Output Power DC corrected	---	25.38	16.88	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	4.52	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	4.52	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:32:47
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5320 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	13.46	dBm	INFO
Ref. Frequency	---	---	5314.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.46 16.16 25
Start [MHz] Stop [MHz]	5295.000 5345.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


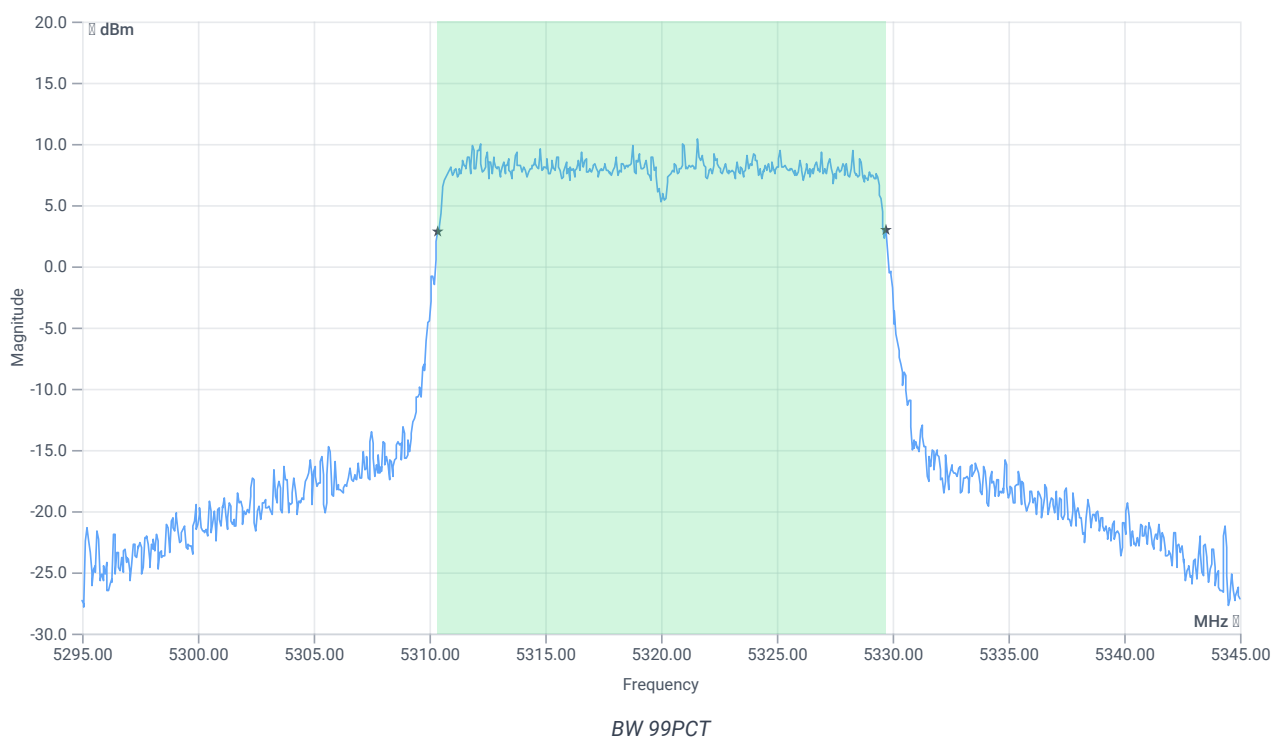


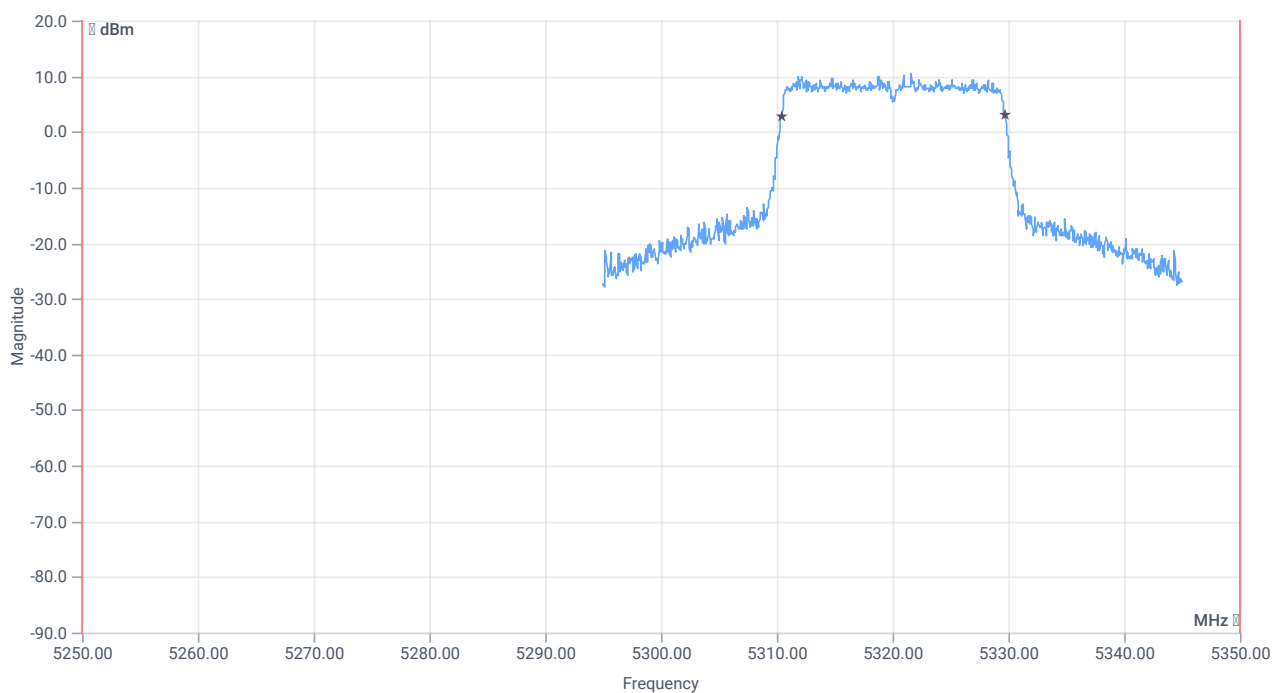

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.381	MHz	INFO
T1 99%	5250.000000	---	5310.3596	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5329.7403	MHz	PASS

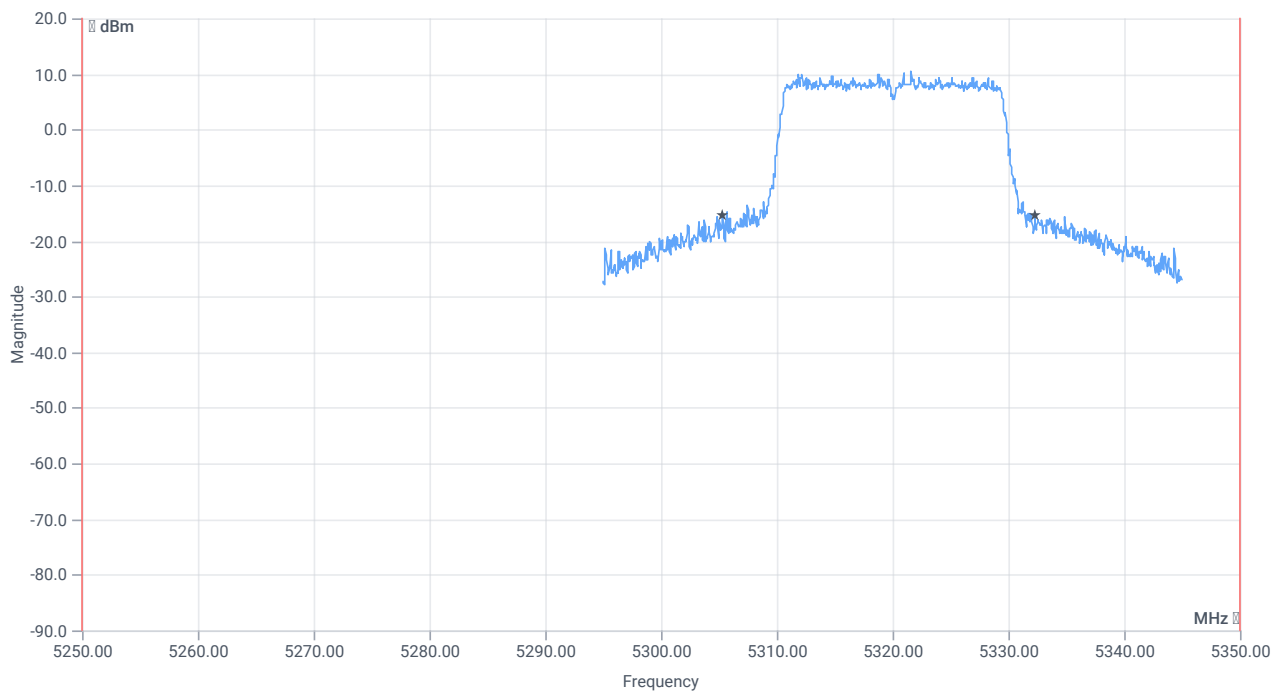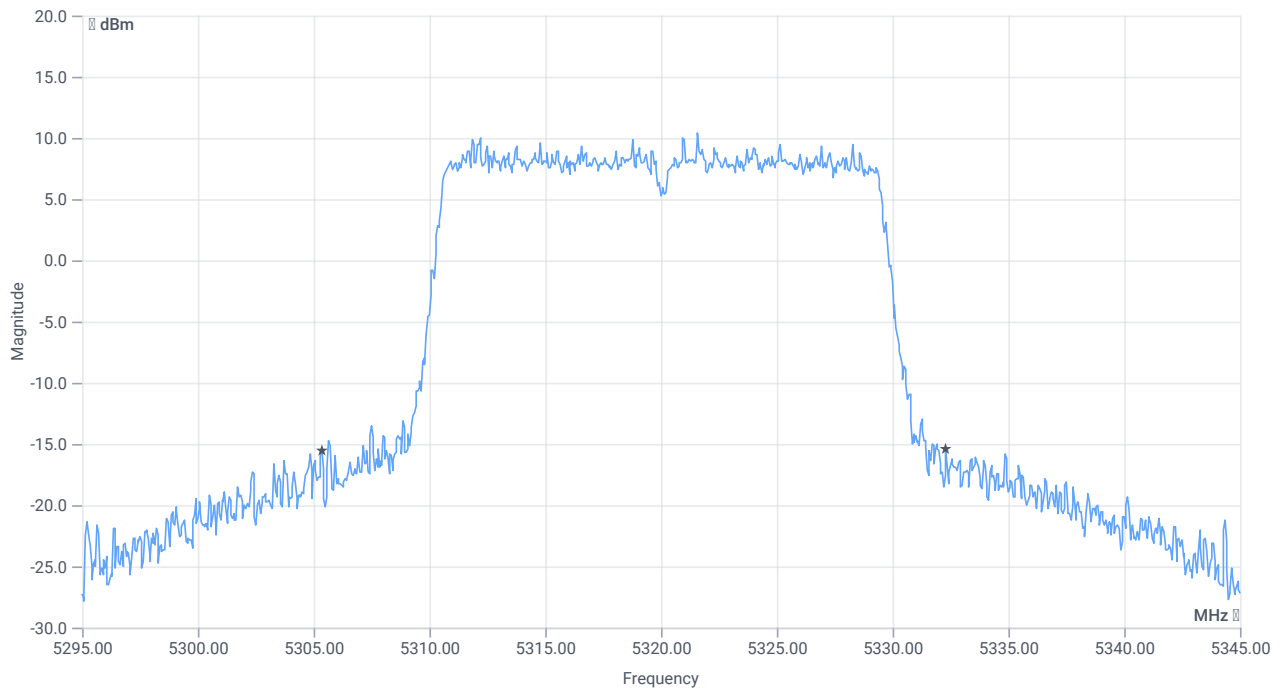

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	26.95	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5305.3500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5332.3000	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:33:17
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5320 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.03	dBm	INFO
Ref. Frequency	---	---	5316.800	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

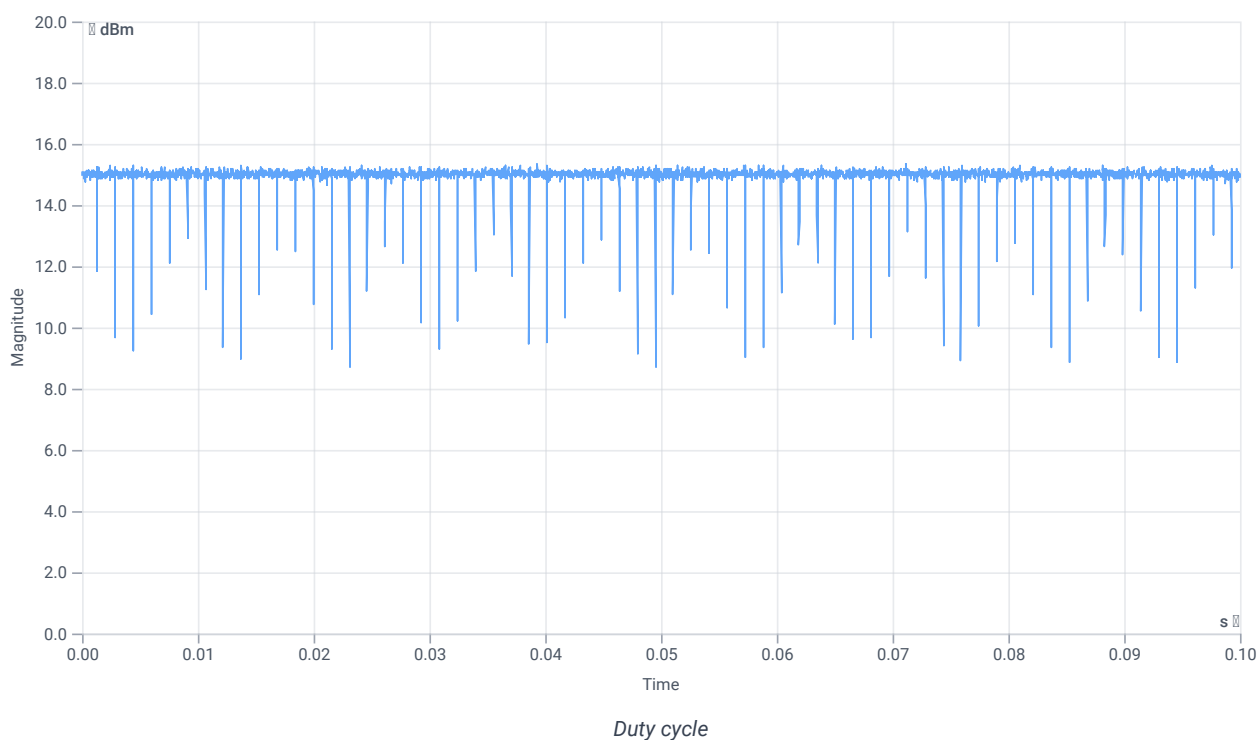

Evaluation Bandwidth

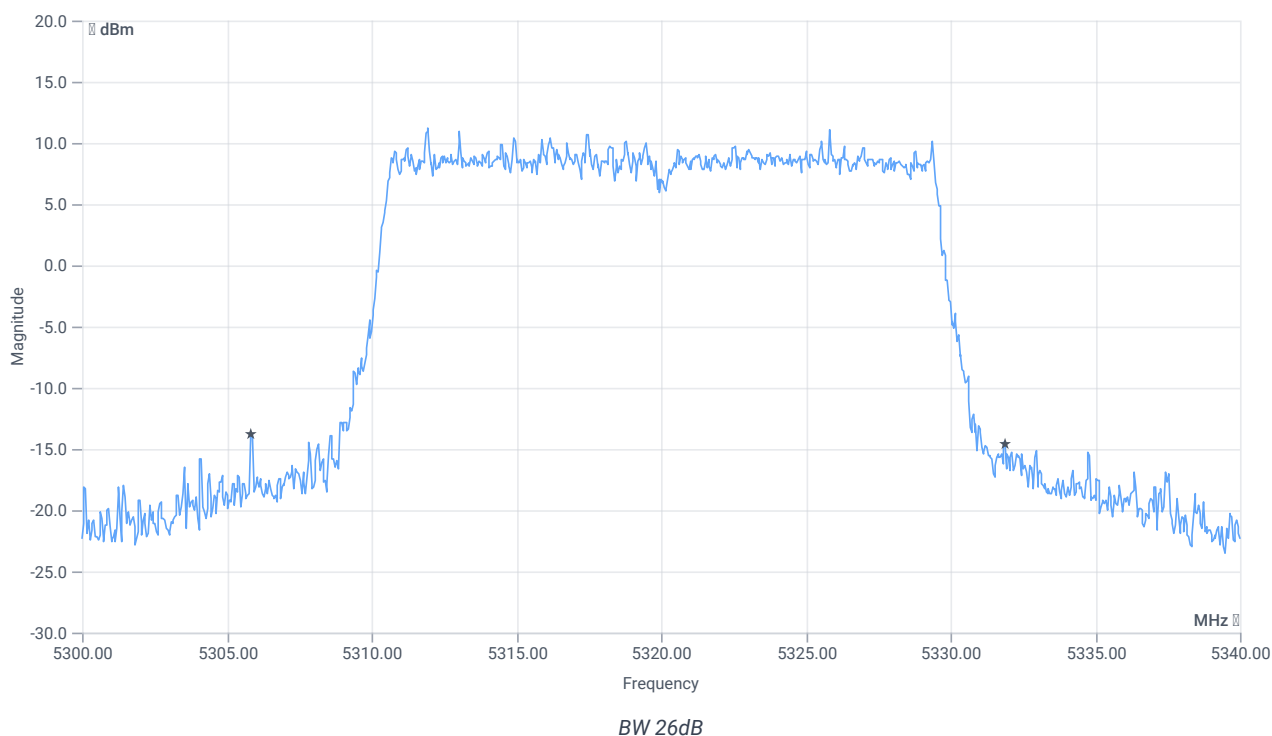


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	26.08	MHz	INFO
T1 26dB	---	---	5305.8000	MHz	INFO
T2 26dB	---	---	5331.8800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	26.03 16.16 25
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

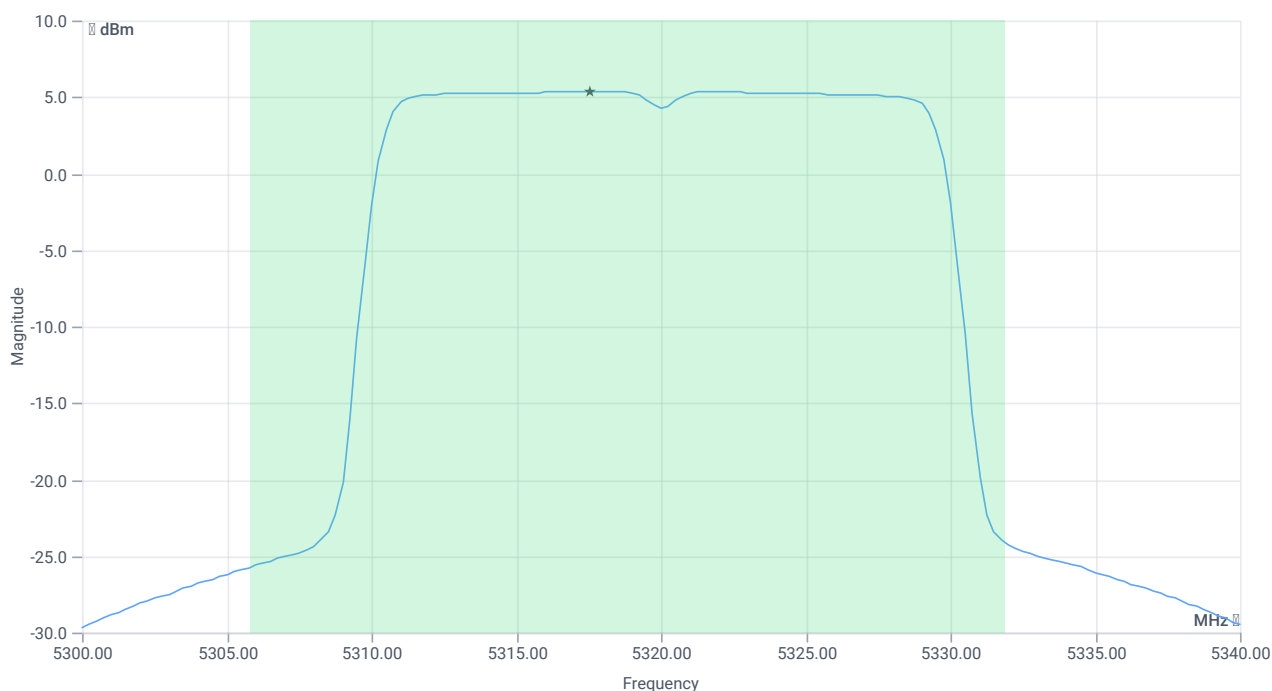

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	17.71	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	17.71	dBm	PASS
Limit: 11 dBm + 10 log 26.08					
Max Output Power DC corrected	---	25.16	17.71	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	5.35	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	5.35	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:34:44
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5320 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	13.55	dBm	INFO
Ref. Frequency	---	---	5324.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.55 16.16 25
Start [MHz] Stop [MHz]	5295.000 5345.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

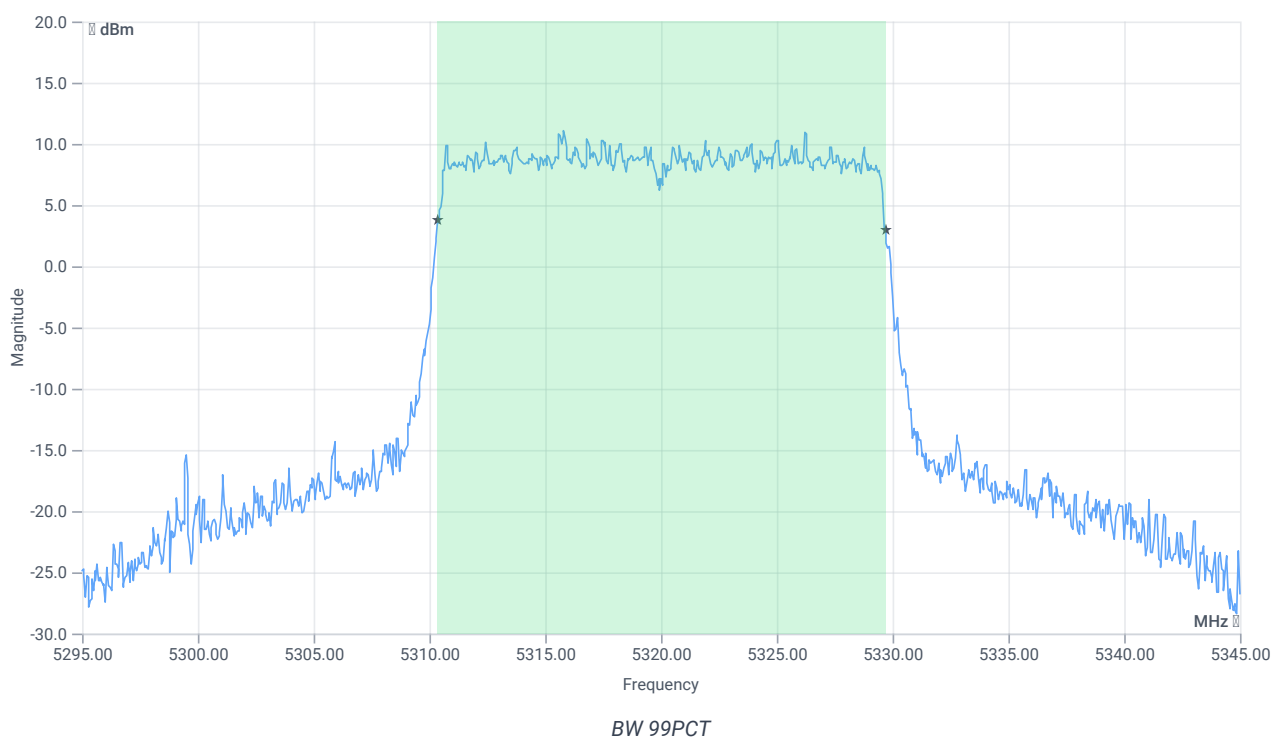


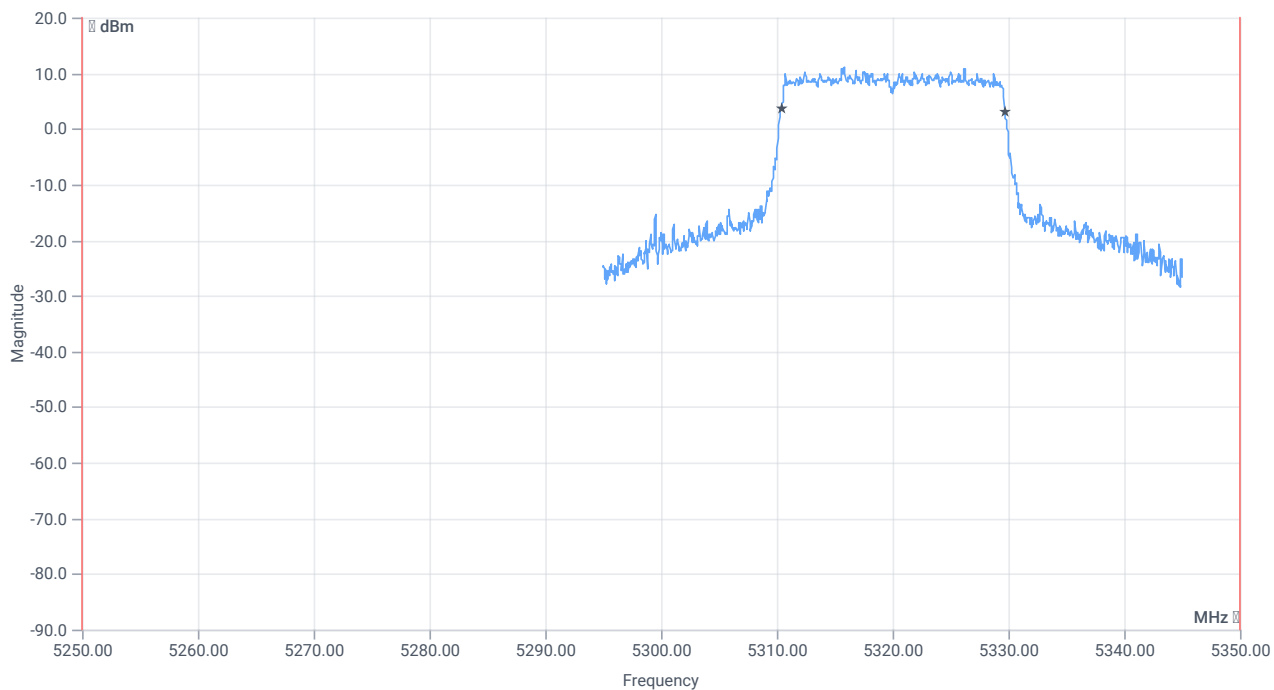


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.331	MHz	INFO
T1 99%	5250.000000	---	5310.3596	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5329.6903	MHz	PASS

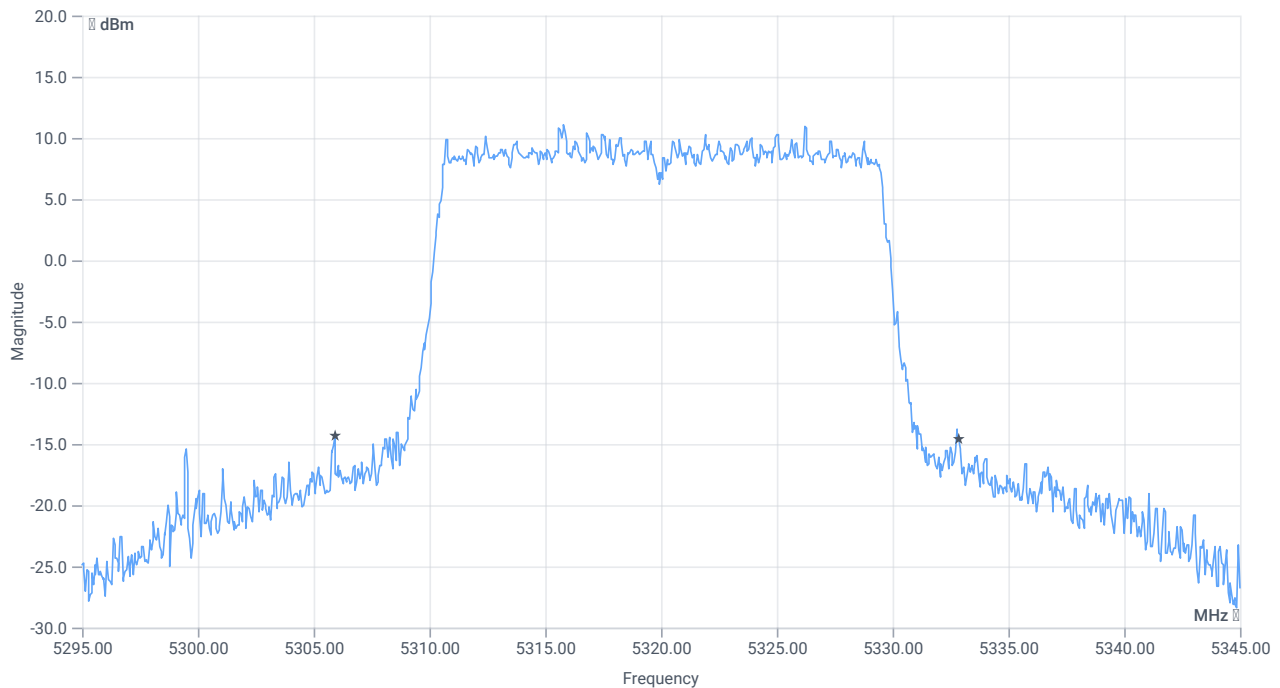

BW 26dB

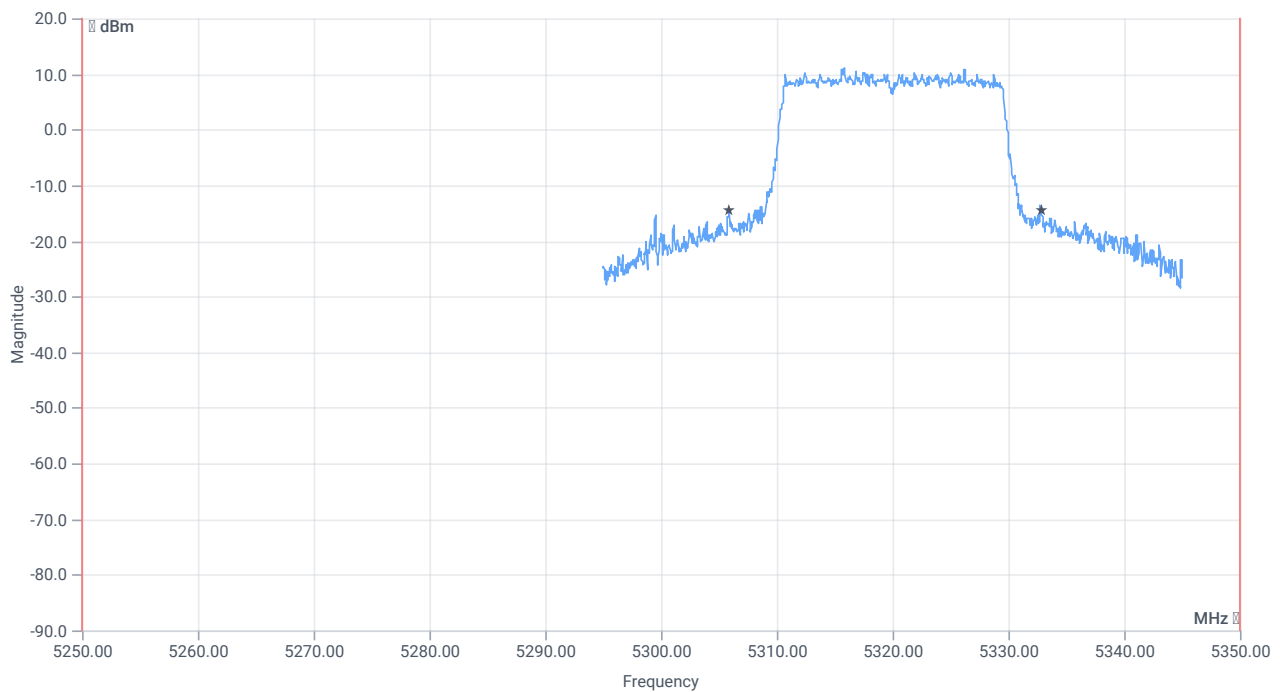

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	26.95	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5305.9000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5332.8500	MHz	PASS

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 11:31:54
Ambit temp [°C] humidity [rel%]	27.2 46
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA WLAN5Gx ax-HE20 U-NII-1
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 11:31:54
Message	set WLAN5Gx to WLAN5Gx ax-HE20 U-NII-1, Frequency [MHz] 5240

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 12:51:07
Ambit temp [°C] humidity [rel%]	27.0 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5500 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.98	dBm	INFO
Ref. Frequency	---	---	5505.990	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

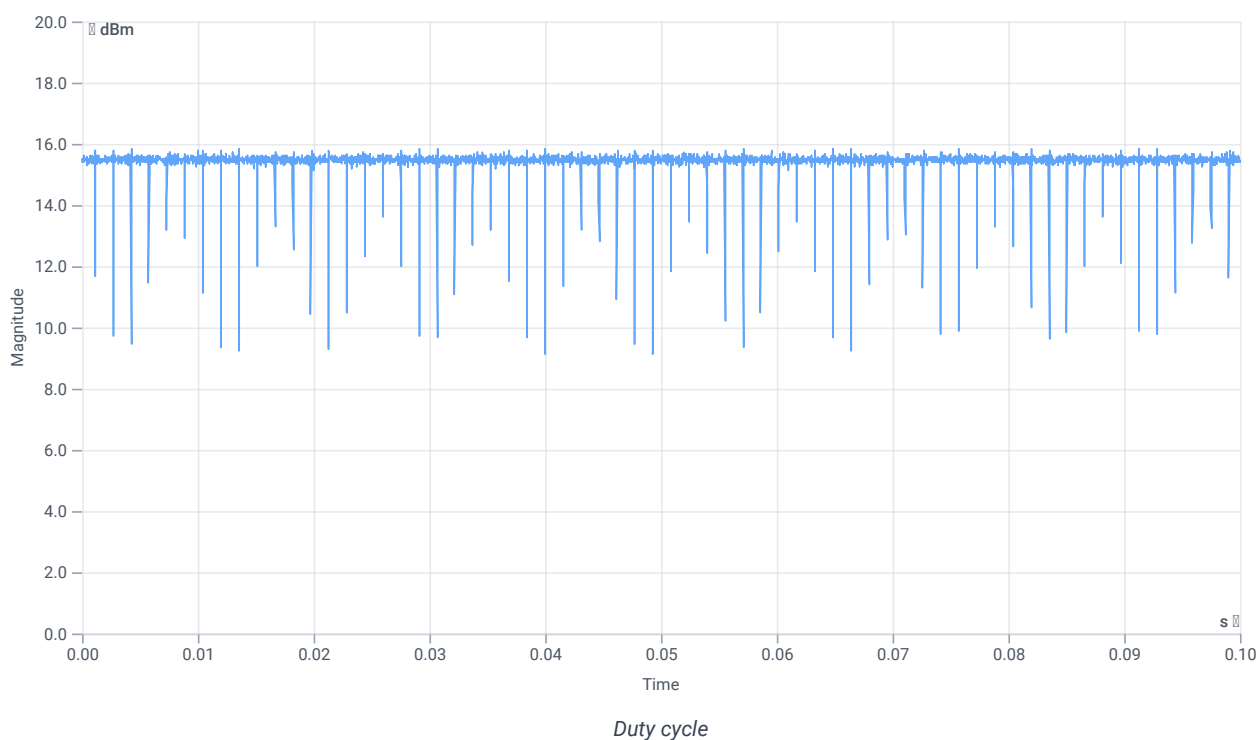

Evaluation Bandwidth

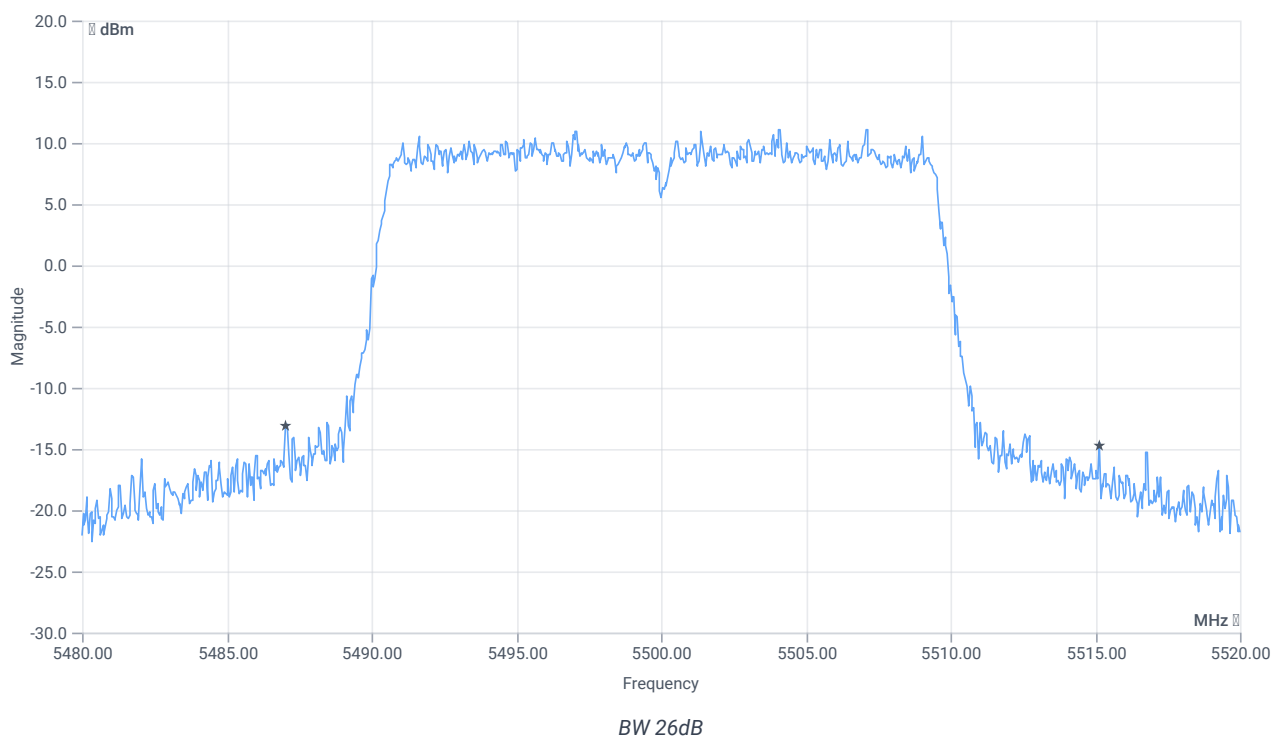


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	28.12	MHz	INFO
T1 26dB	---	---	5487.0400	MHz	INFO
T2 26dB	---	---	5515.1600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.98 16.59 30
Start [MHz] Stop [MHz]	5480.000 5520.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

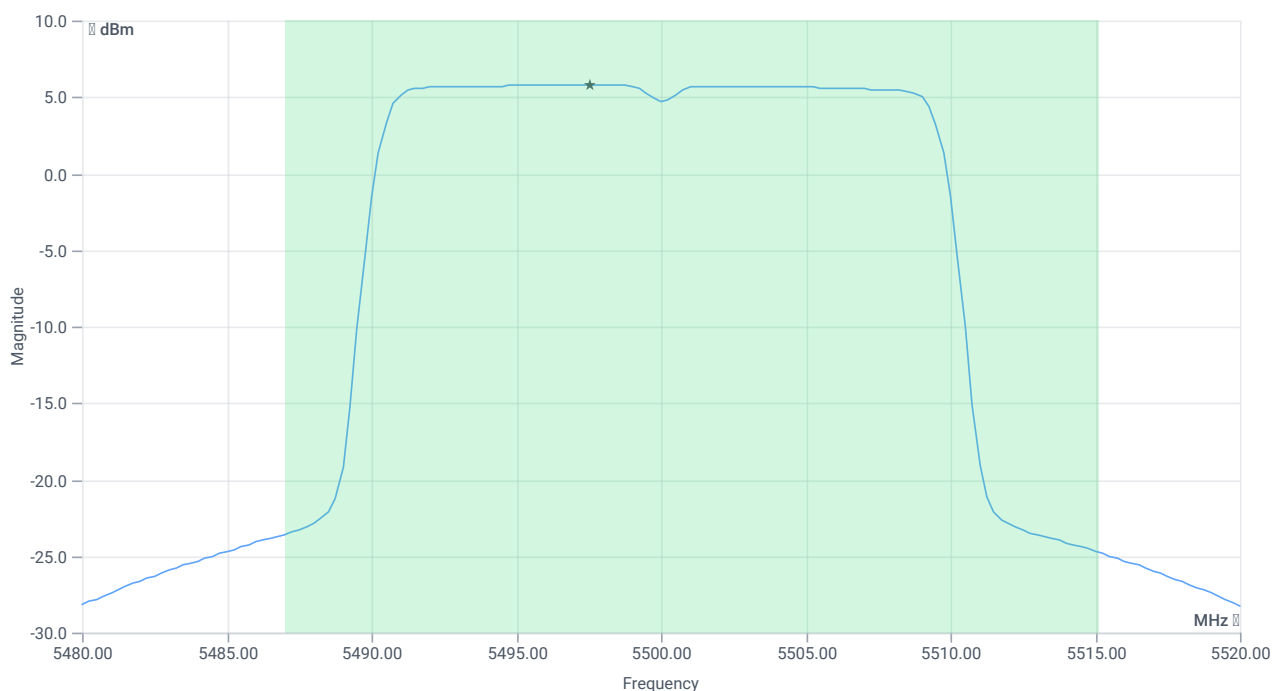

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	18.15	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	18.15	dBm	PASS
Limit: 11 dBm + 10 log 28.12					
Max Output Power DC corrected	---	25.49	18.15	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	5.78	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	5.78	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 12:52:33
Ambit temp [°C] humidity [rel%]	27.0 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5500 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.90	dBm	INFO
Ref. Frequency	---	---	5502.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.90 16.59 25
Start [MHz] Stop [MHz]	5475.000 5525.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


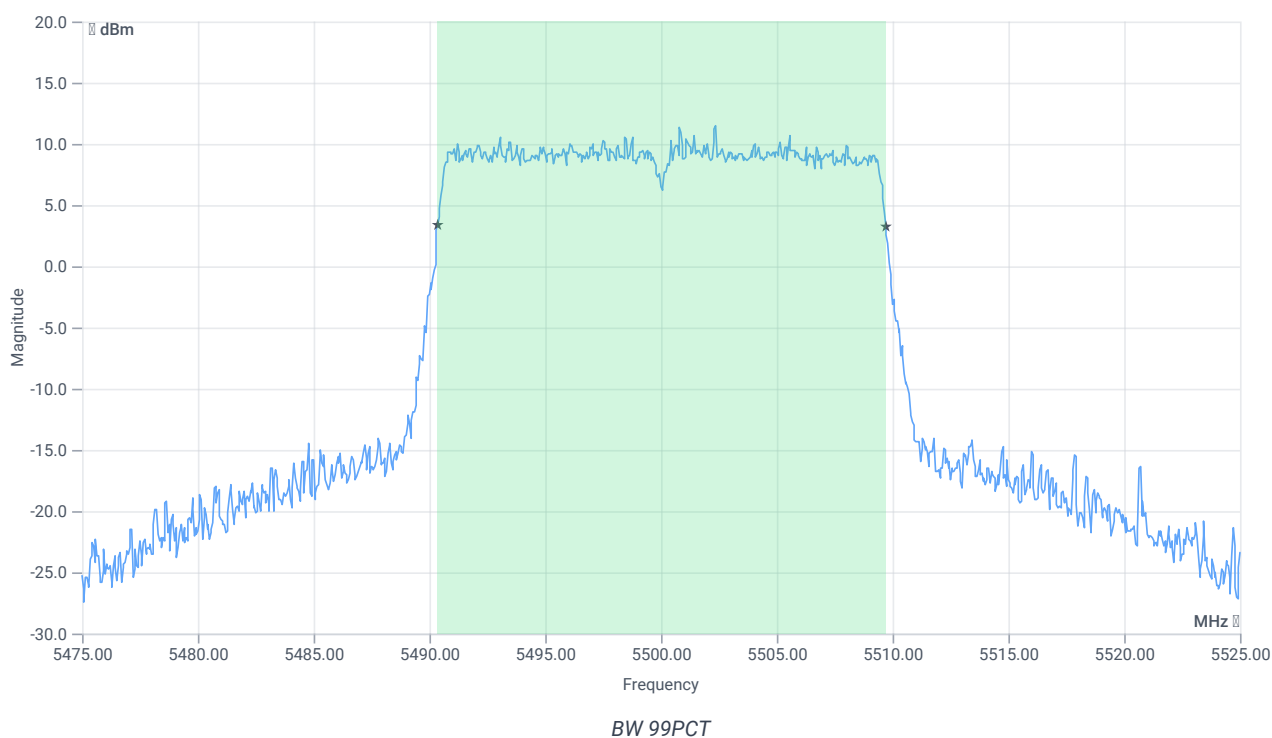




BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.331	MHz	INFO
T1 99%	5470.000000	---	5490.3596	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5509.6903	MHz	

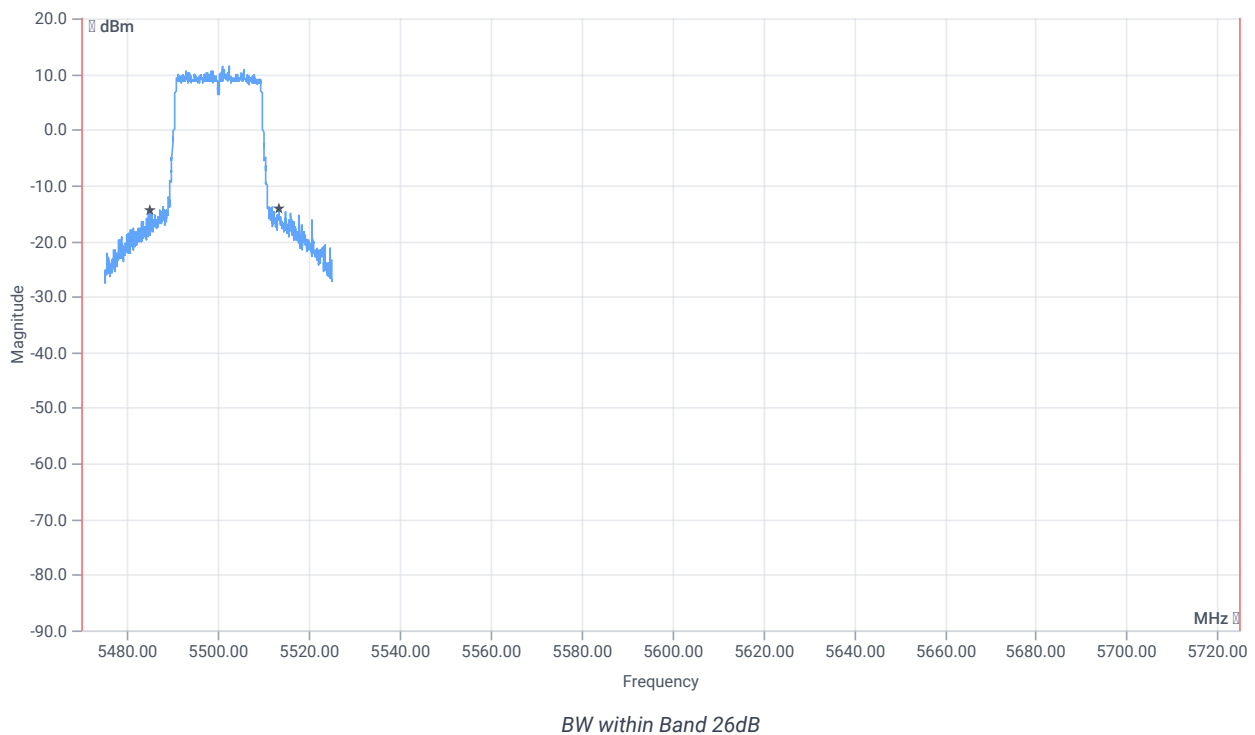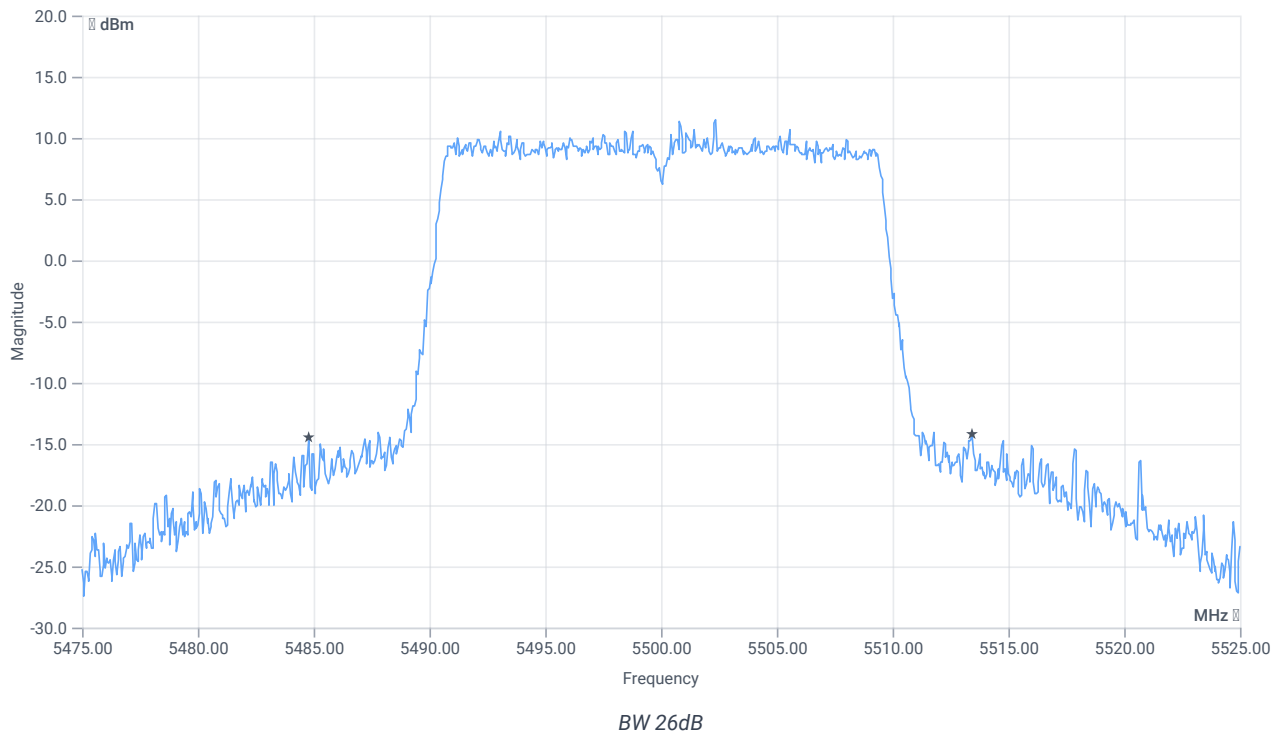

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	28.65	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5484.8000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5513.4500	MHz	

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 12:53:03
Ambit temp [°C] humidity [rel%]	27.0 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5500 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.37	dBm	INFO
Ref. Frequency	---	---	5496.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

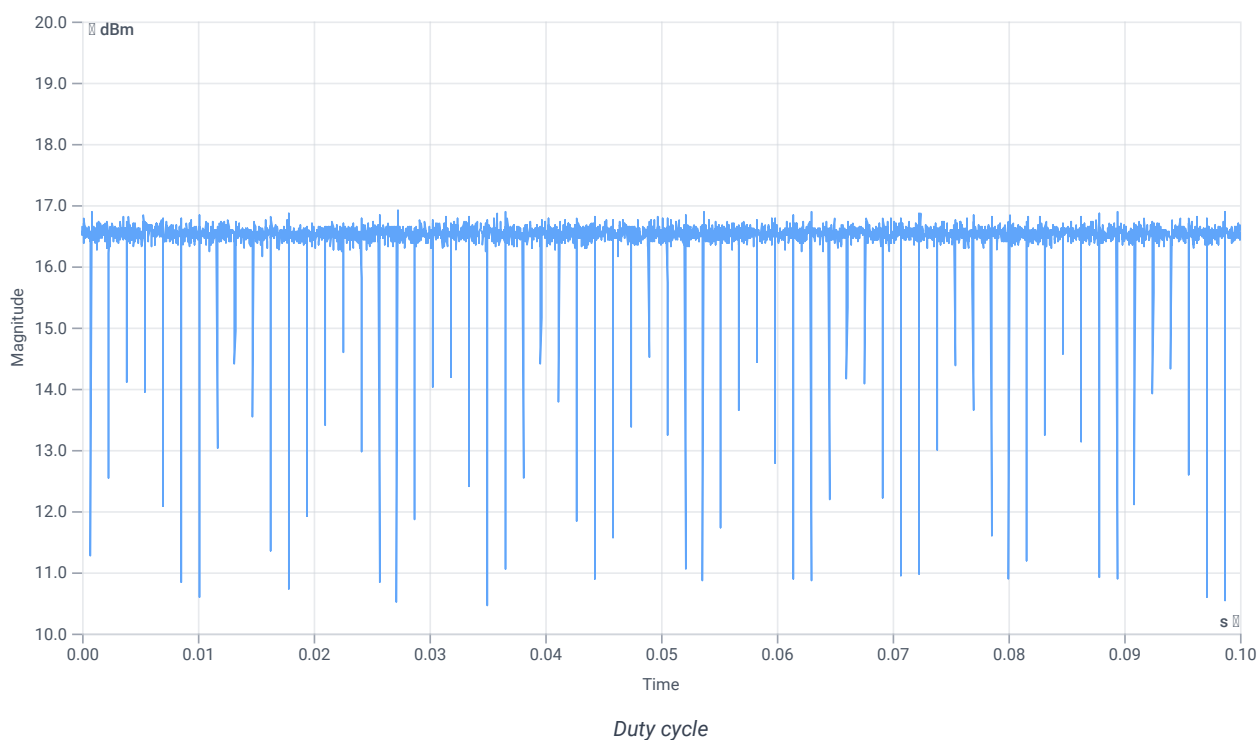

Evaluation Bandwidth

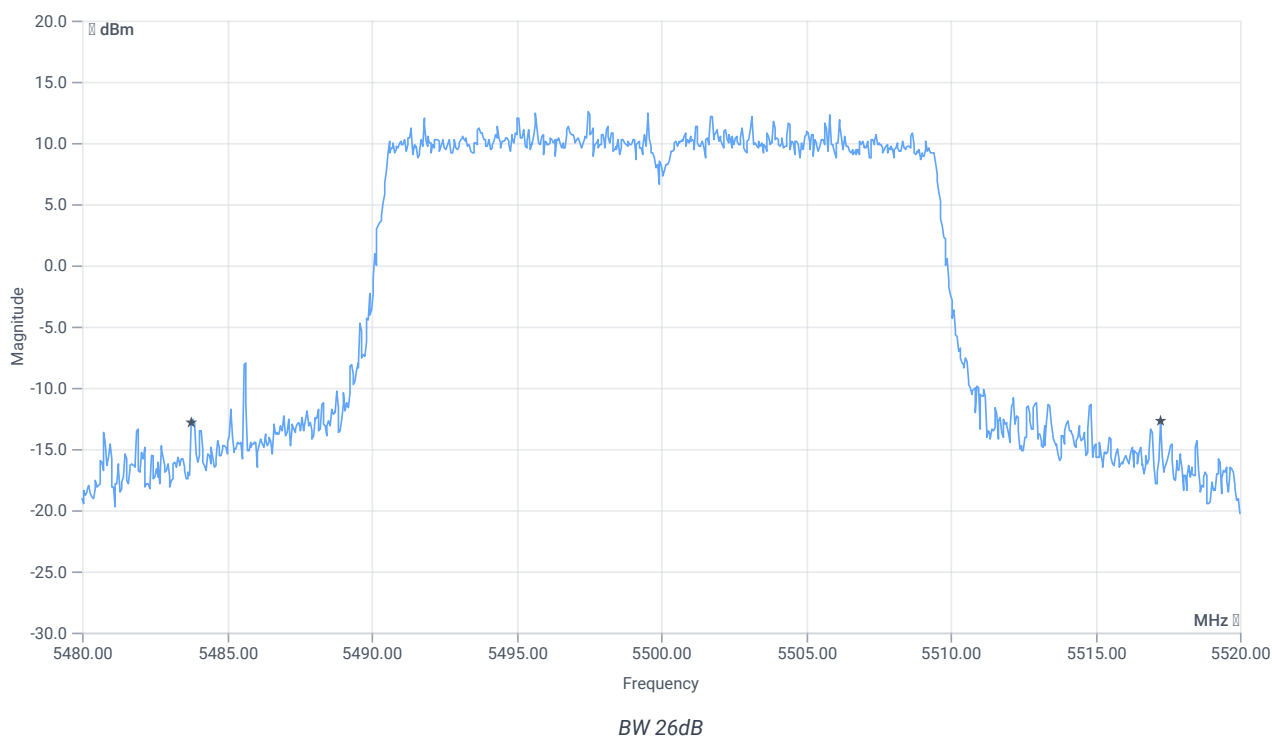


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	33.52	MHz	INFO
T1 26dB	---	---	5483.7600	MHz	INFO
T2 26dB	---	---	5517.2800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.37 16.59 30
Start [MHz] Stop [MHz]	5480.000 5520.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

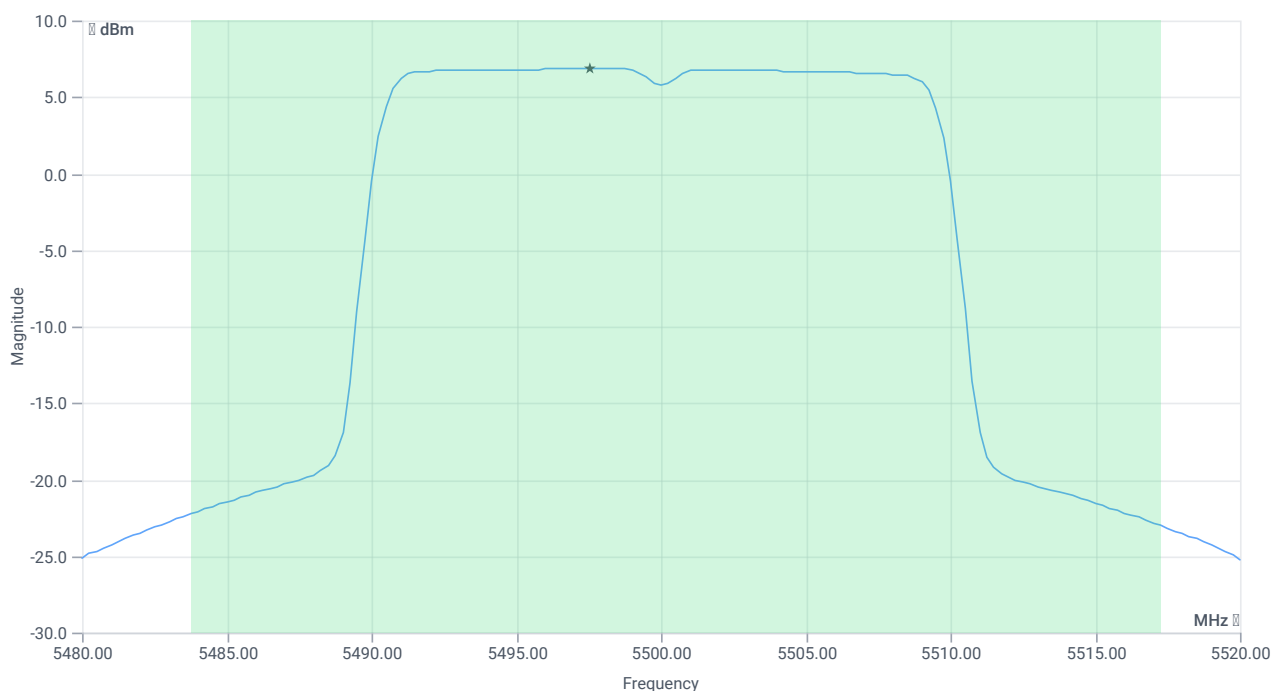

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.2	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	19.2	dBm	PASS
Limit: 11 dBm + 10 log 33.52					
Max Output Power DC corrected	---	26.25	19.2	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	6.84	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	6.84	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 12:54:30
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5500 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.92	dBm	INFO
Ref. Frequency	---	---	5499.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.92 16.59 25
Start [MHz] Stop [MHz]	5475.000 5525.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

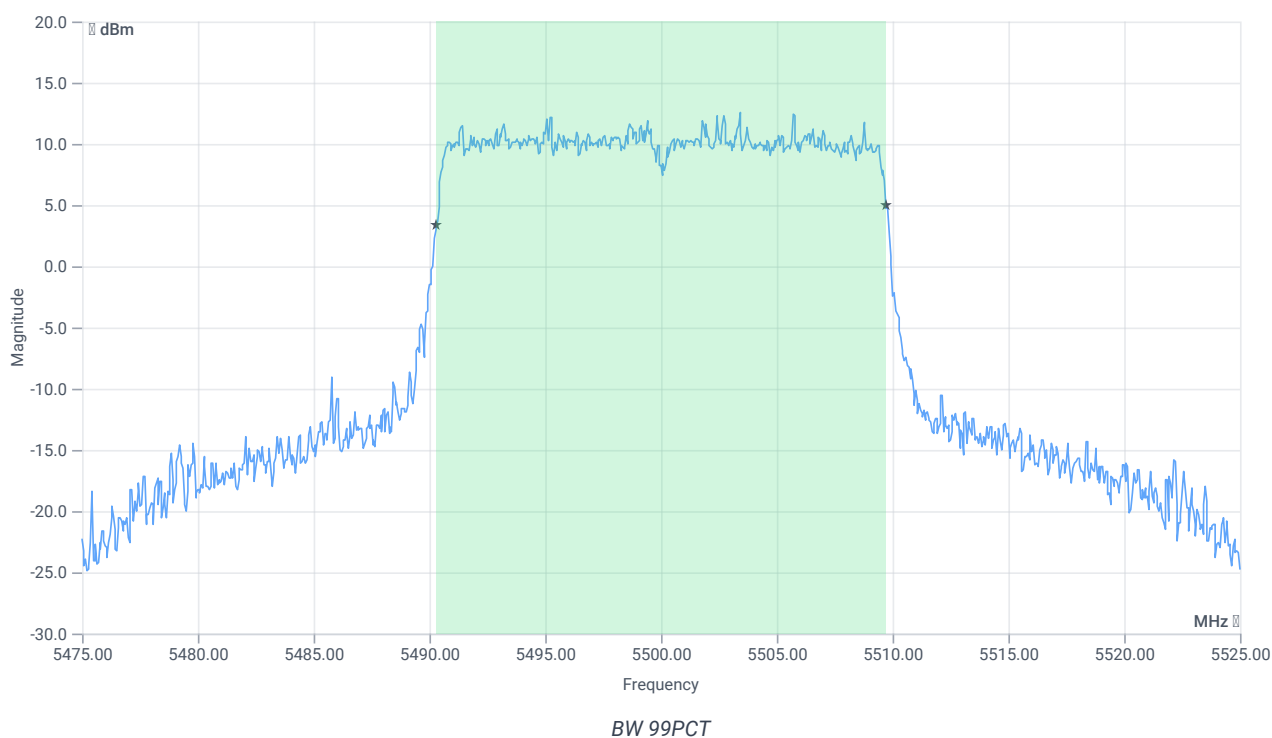


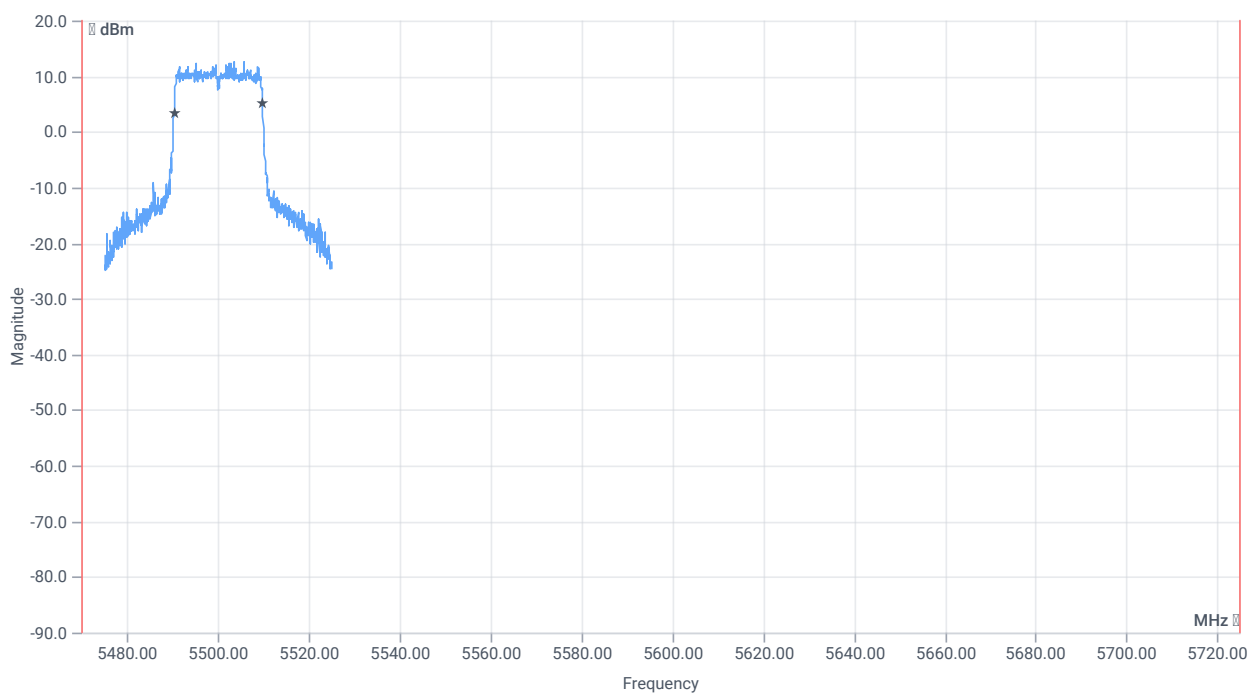


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.431	MHz	INFO
T1 99%	5470.000000	---	5490.3097	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5509.7403	MHz	

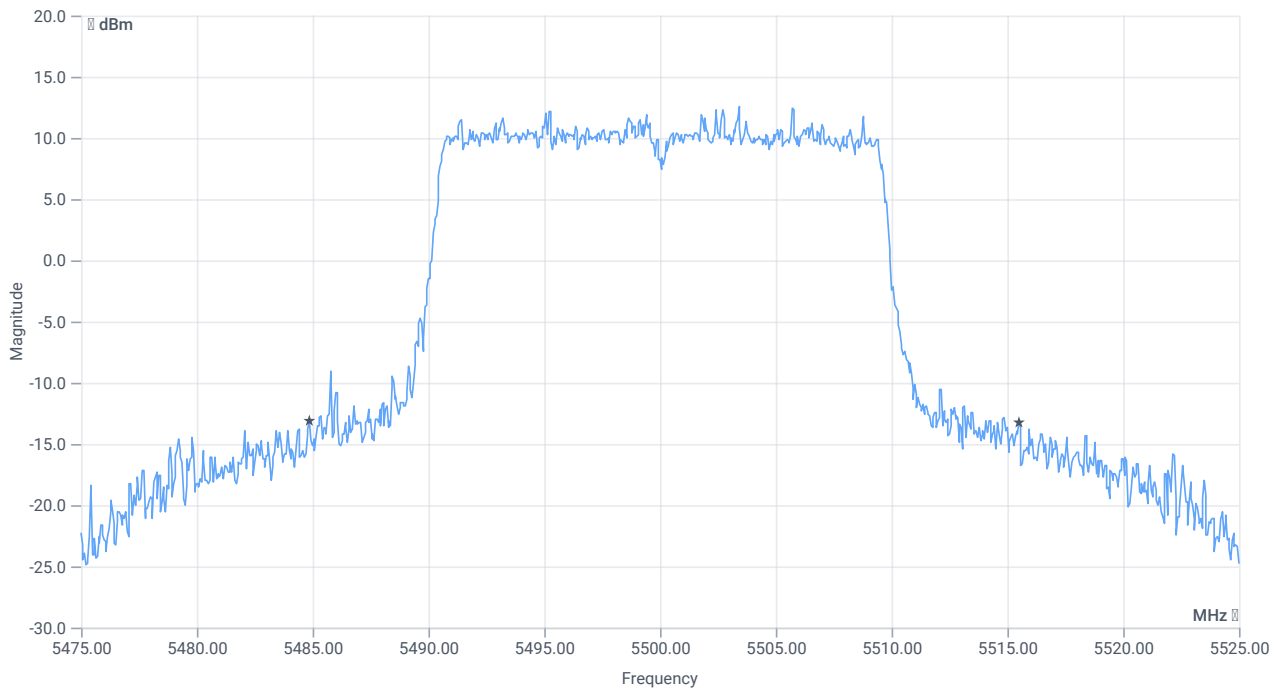

BW 26dB

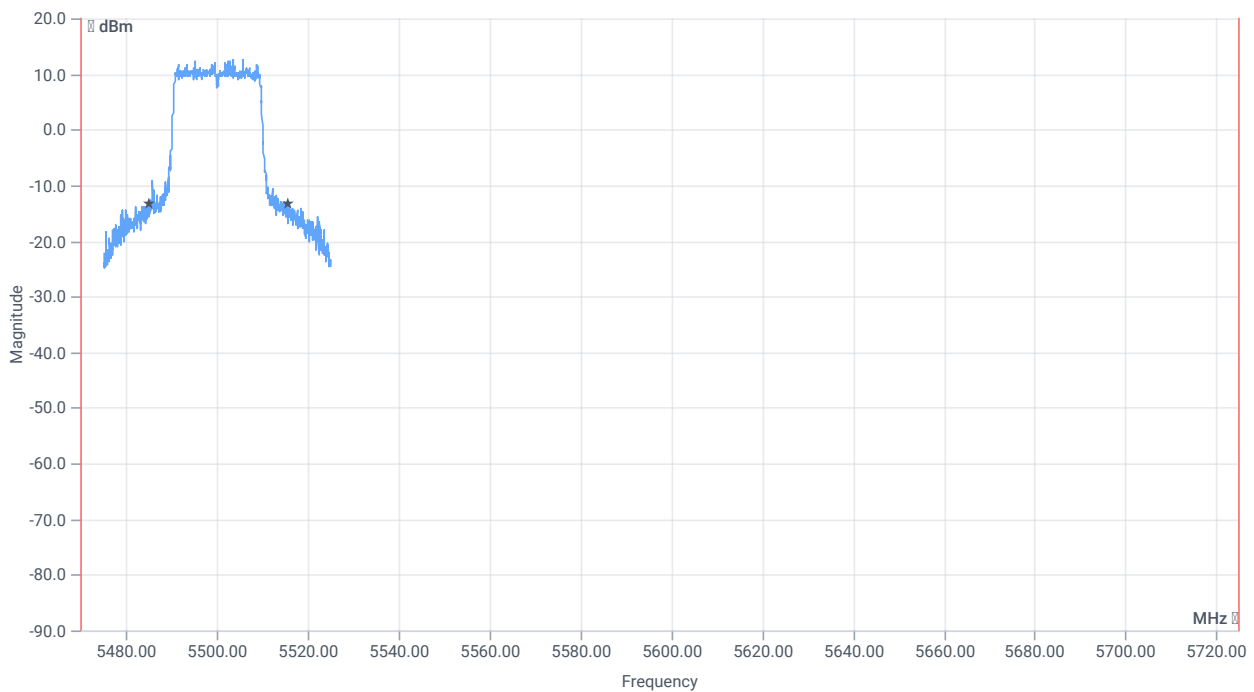

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	30.65	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5484.8500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5515.5000	MHz	

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 12:55:01
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA Scan ax_HE20_U_NII_2C
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 12:55:01
Message	set WLAN5Gx to ax_HE20_U_NII_2C, Frequency [MHz] 5600 ,

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:09:38
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5600 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.20	dBm	INFO
Ref. Frequency	---	---	5601.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

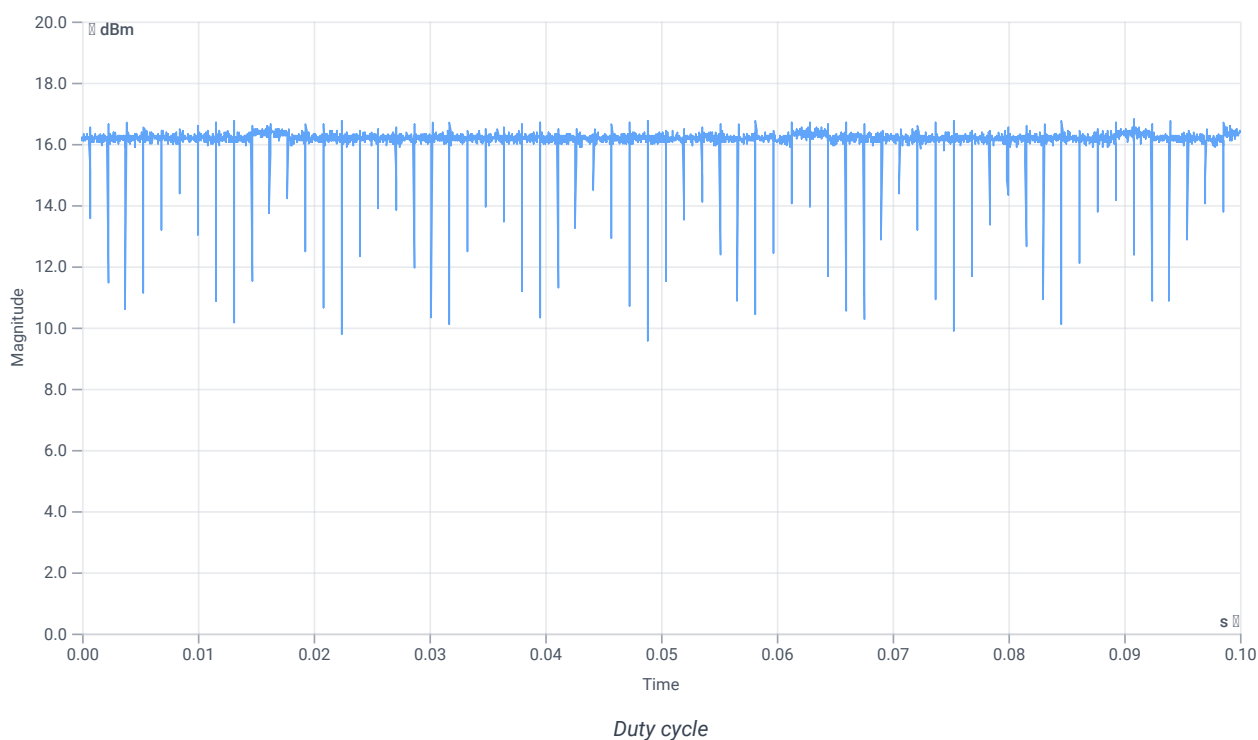

Evaluation Bandwidth

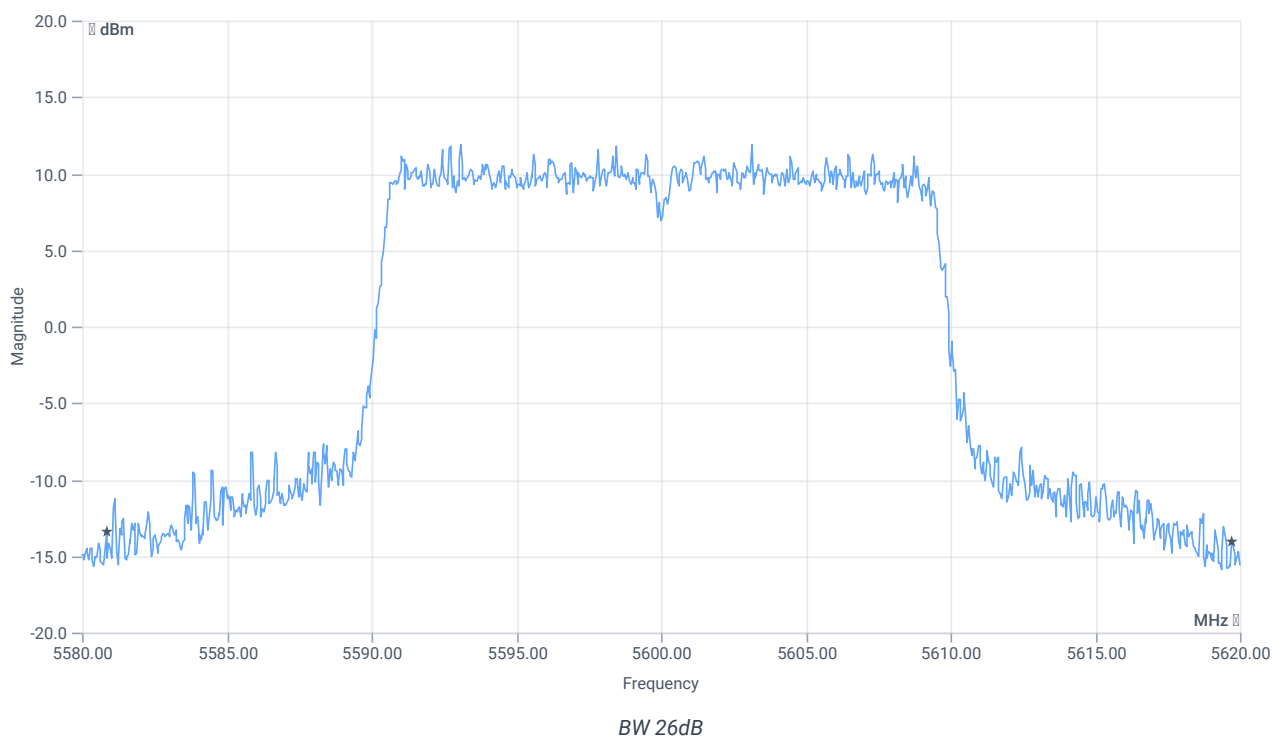


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	38.88	MHz	INFO
T1 26dB	---	---	5580.8400	MHz	INFO
T2 26dB	---	---	5619.7200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.20 16.64 30
Start [MHz] Stop [MHz]	5580.000 5620.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

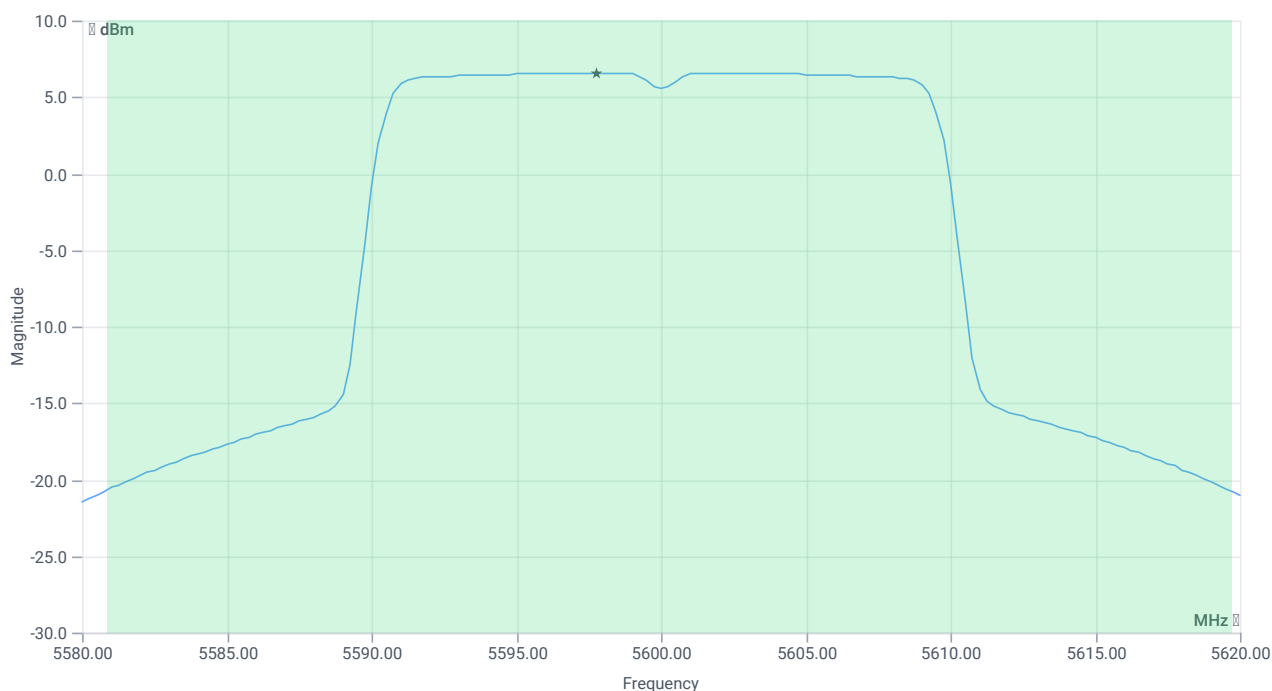

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	18.96	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	18.96	dBm	PASS
Limit: 11 dBm + 10 log 38.88					
Max Output Power DC corrected	---	26.9	18.96	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	6.59	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	6.59	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:11:04
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5600 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.66	dBm	INFO
Ref. Frequency	---	---	5601.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.66 16.64 25
Start [MHz] Stop [MHz]	5575.000 5625.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

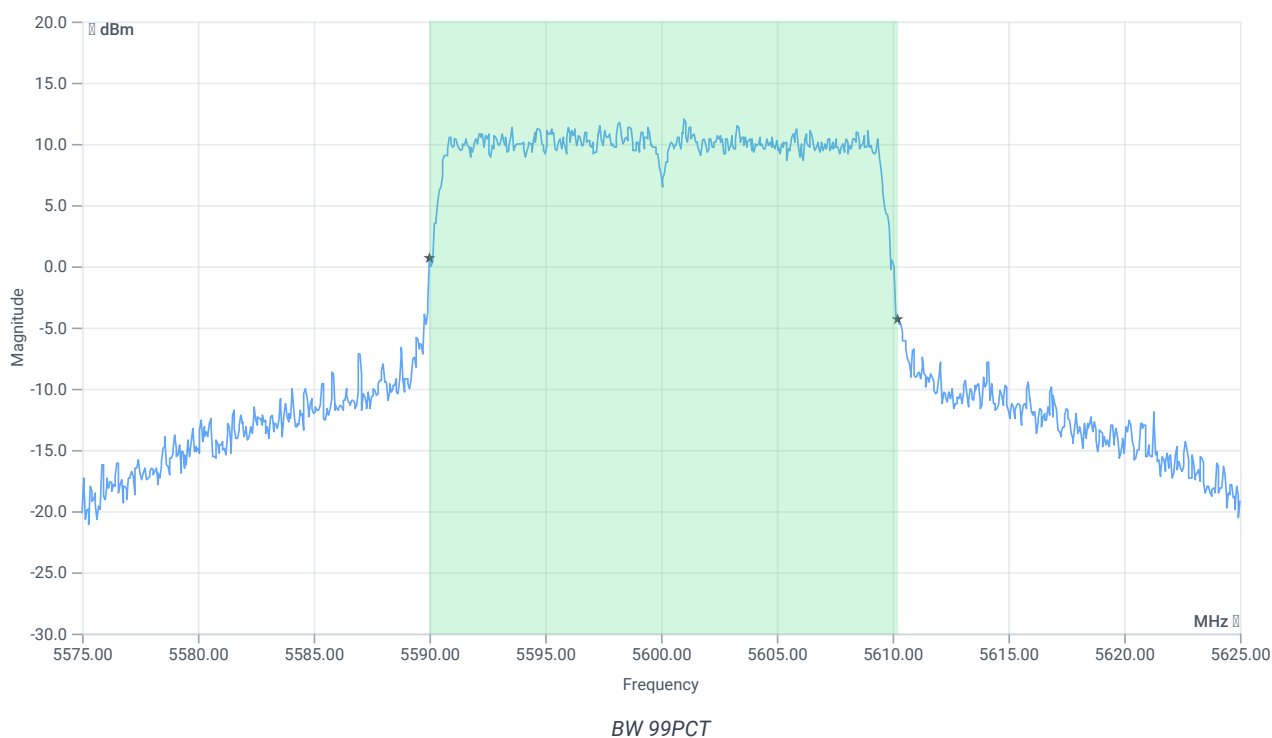





BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	20.180	MHz	INFO
T1 99%	5470.000000	---	5590.0100	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5610.1898	MHz	

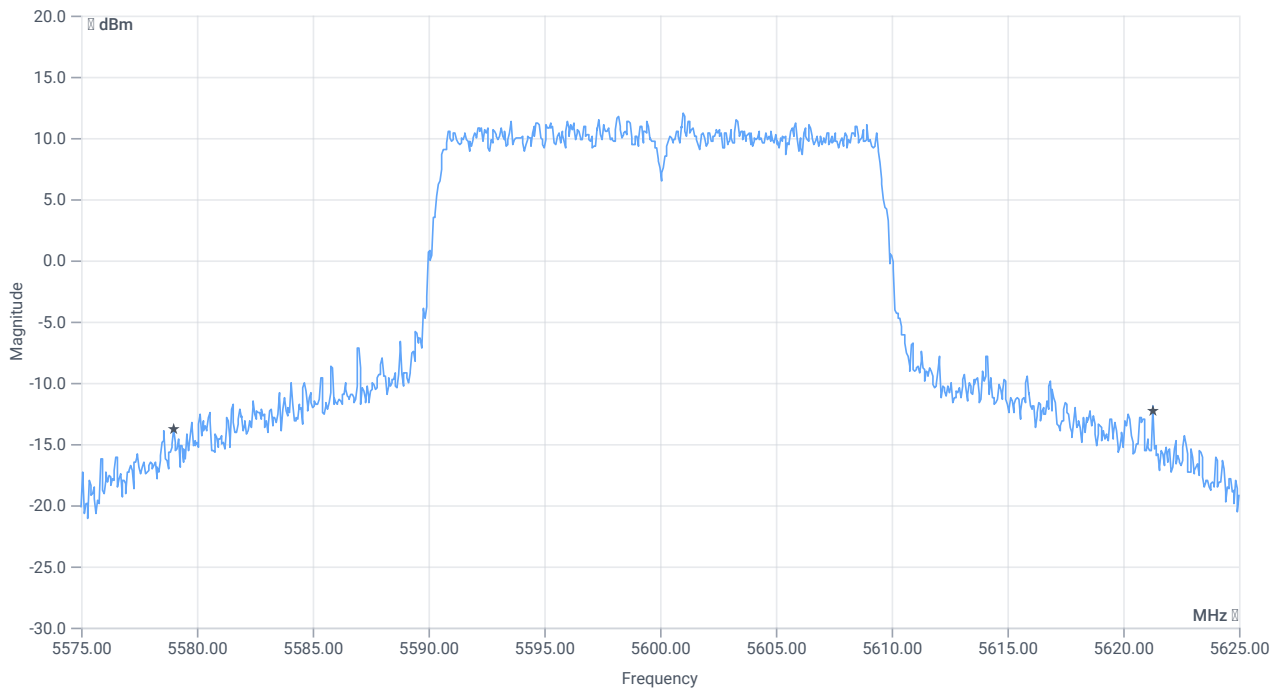

BW 26dB

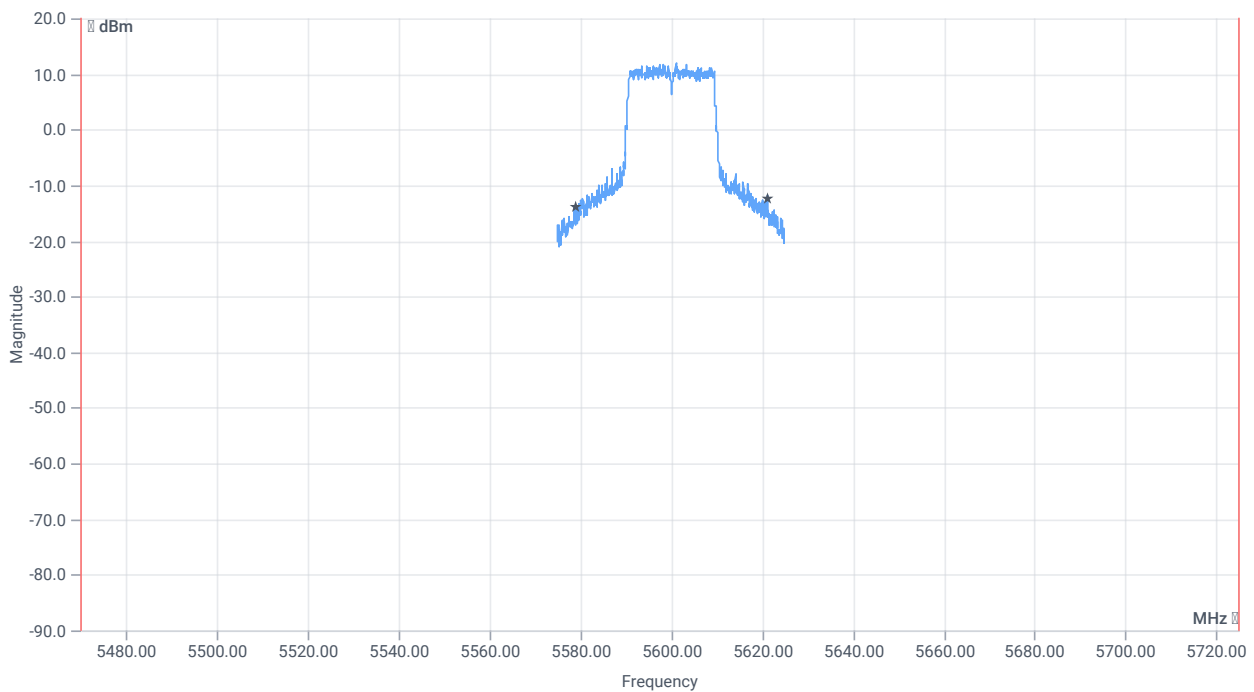

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.3	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5579.0000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5621.3000	MHz	

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:11:35
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5600 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.15	dBm	INFO
Ref. Frequency	---	---	5594.610	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

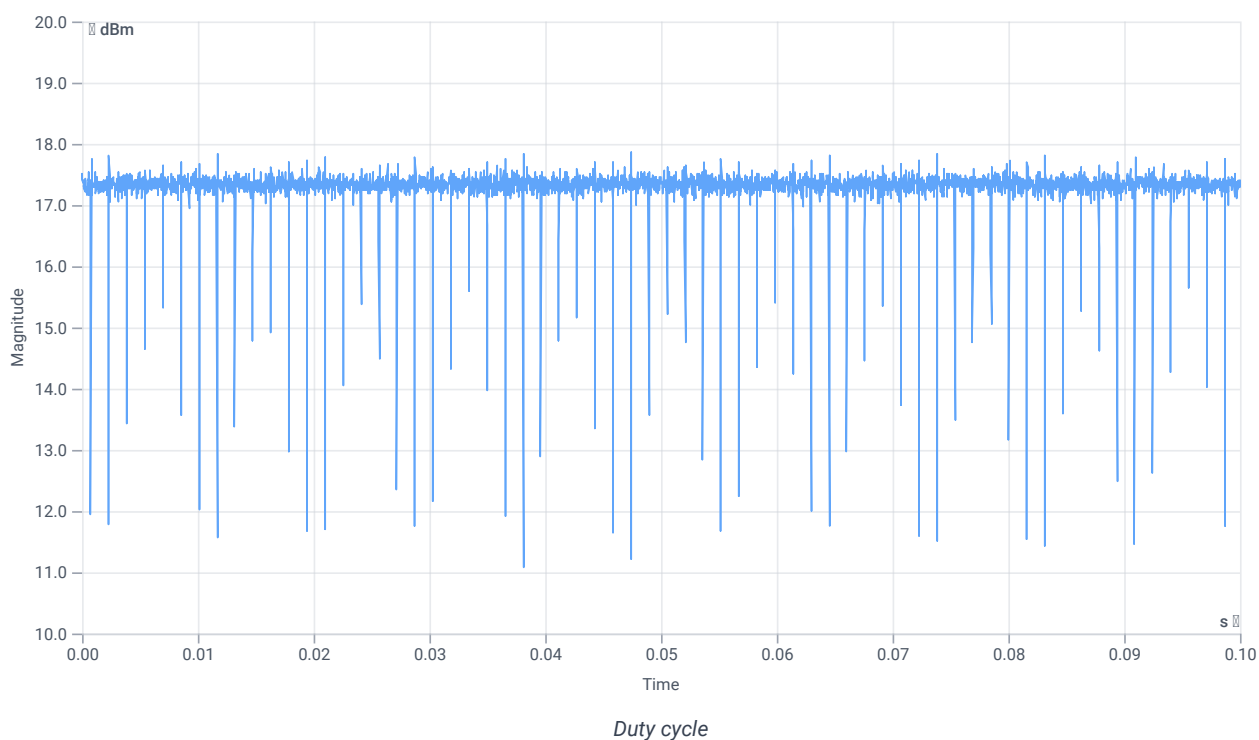

Evaluation Bandwidth

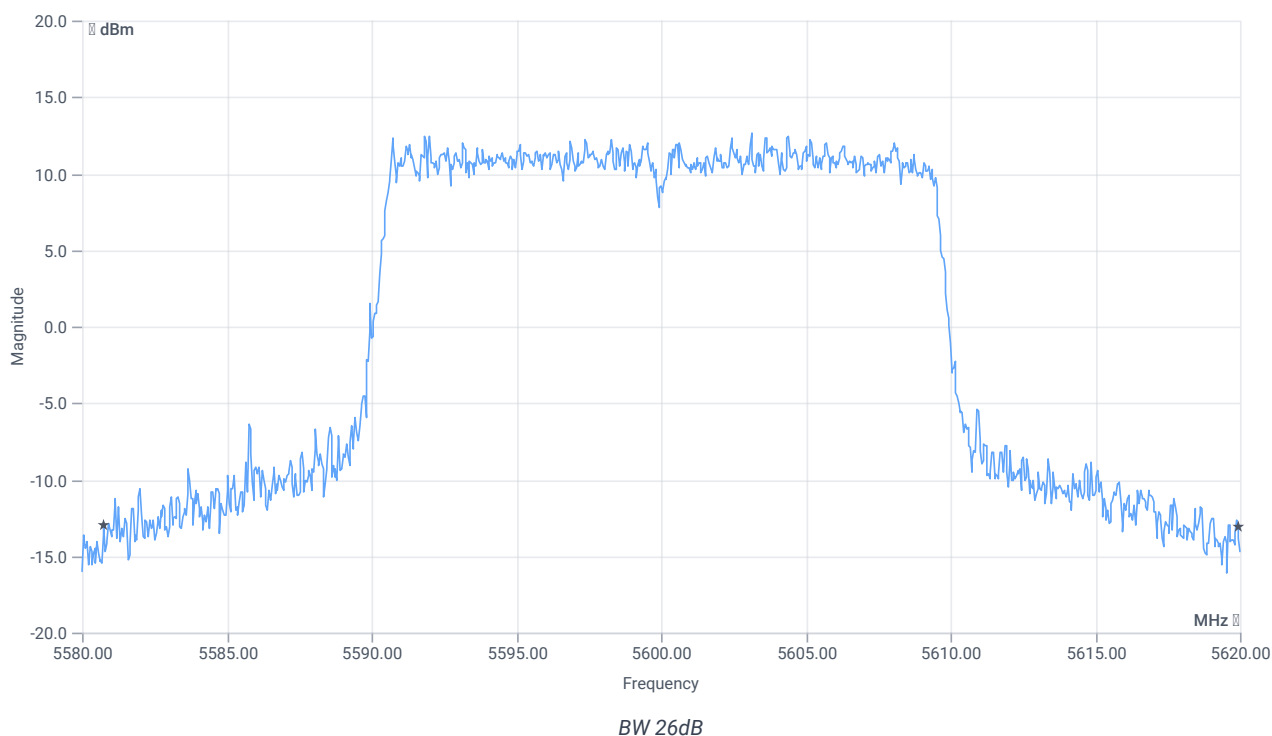


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.16	MHz	INFO
T1 26dB	---	---	5580.7600	MHz	INFO
T2 26dB	---	---	5619.9200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.15 16.64 30
Start [MHz] Stop [MHz]	5580.000 5620.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

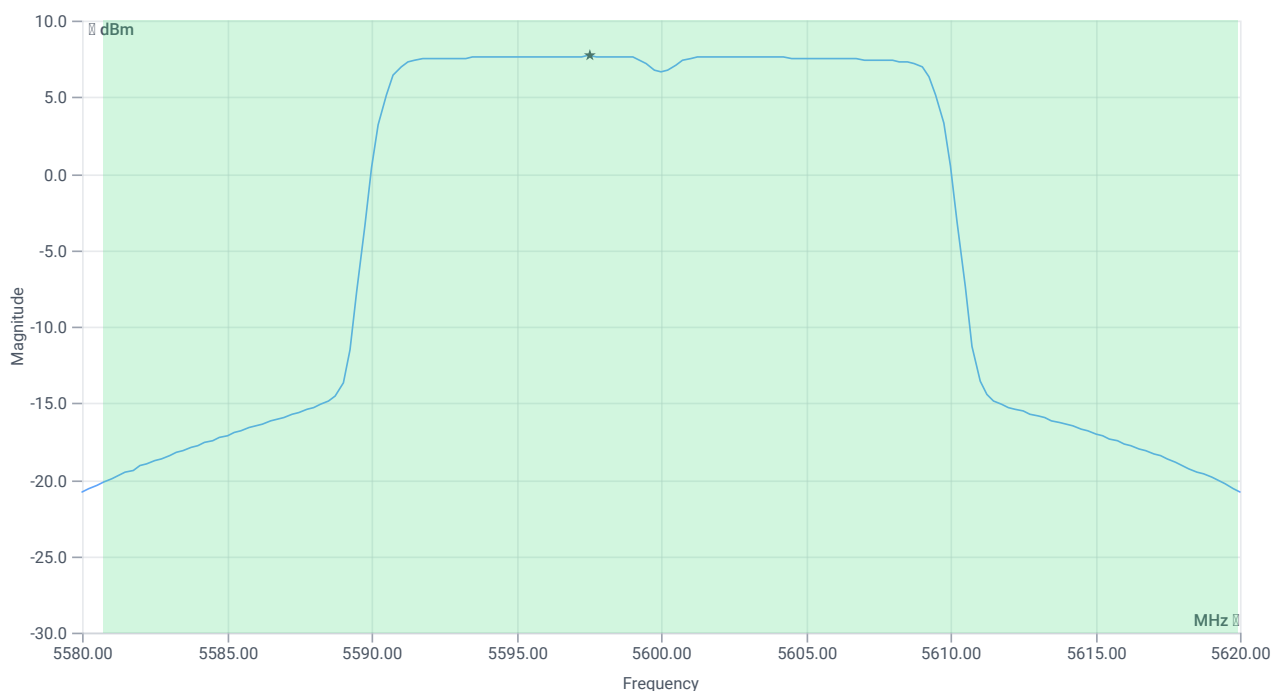

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	20.07	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	20.07	dBm	PASS
Limit: 11 dBm + 10 log 39.16					
Max Output Power DC corrected	---	26.93	20.07	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	7.69	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	7.69	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:13:01
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5600 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.55	dBm	INFO
Ref. Frequency	---	---	5601.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.55 16.64 25
Start [MHz] Stop [MHz]	5575.000 5625.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

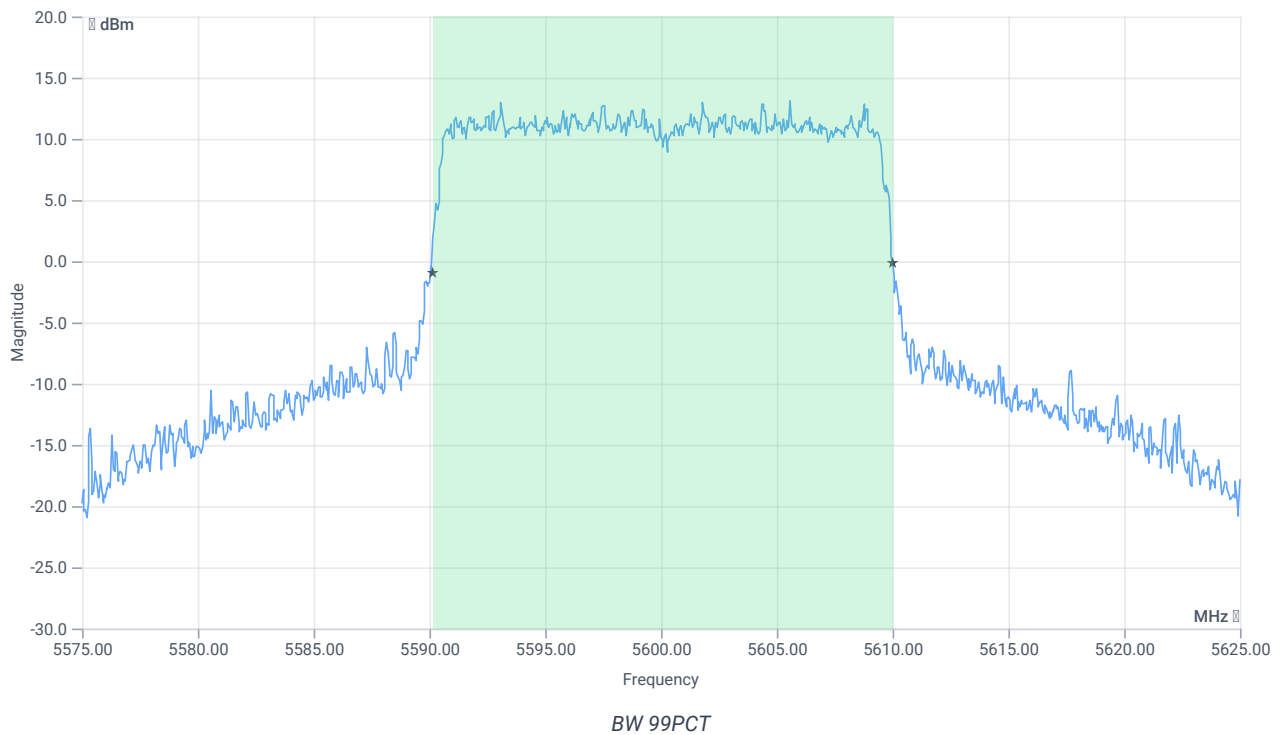





BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.880	MHz	INFO
T1 99%	5470.000000	---	5590.1099	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5609.9900	MHz	

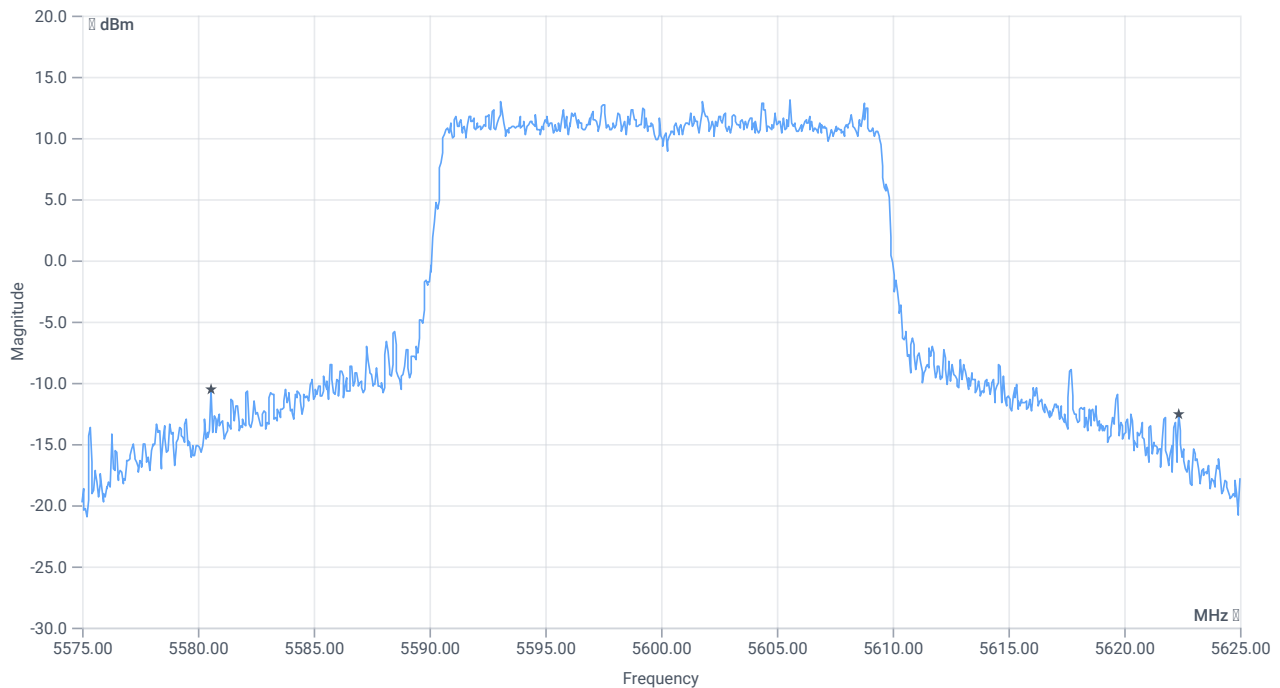

BW 26dB

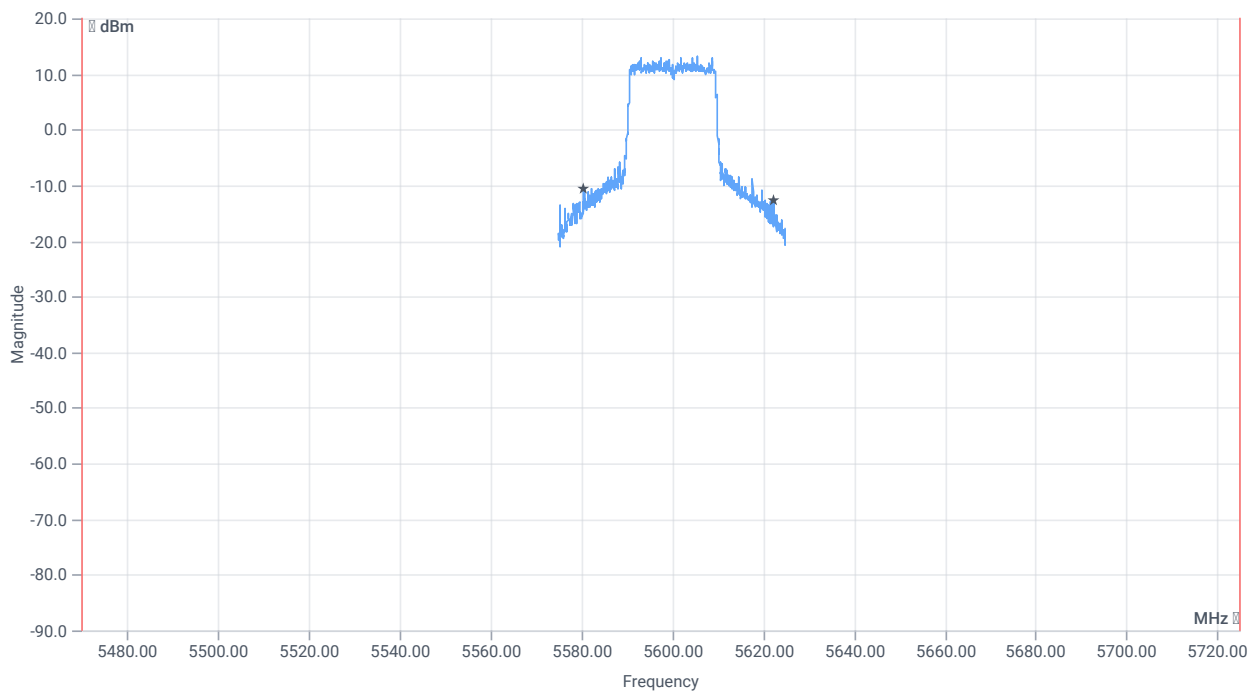

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41.8	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5580.5500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5622.3500	MHz	

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 13:13:31
Ambit temp [°C] humidity [rel%]	26.8 48
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA Scan ax_HE20_U_NII_2C
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 13:13:32
Message	set WLAN5Gx to ax_HE20_U_NII_2C, Frequency [MHz] 5700

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:16:53
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5700 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.52	dBm	INFO
Ref. Frequency	---	---	5699.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

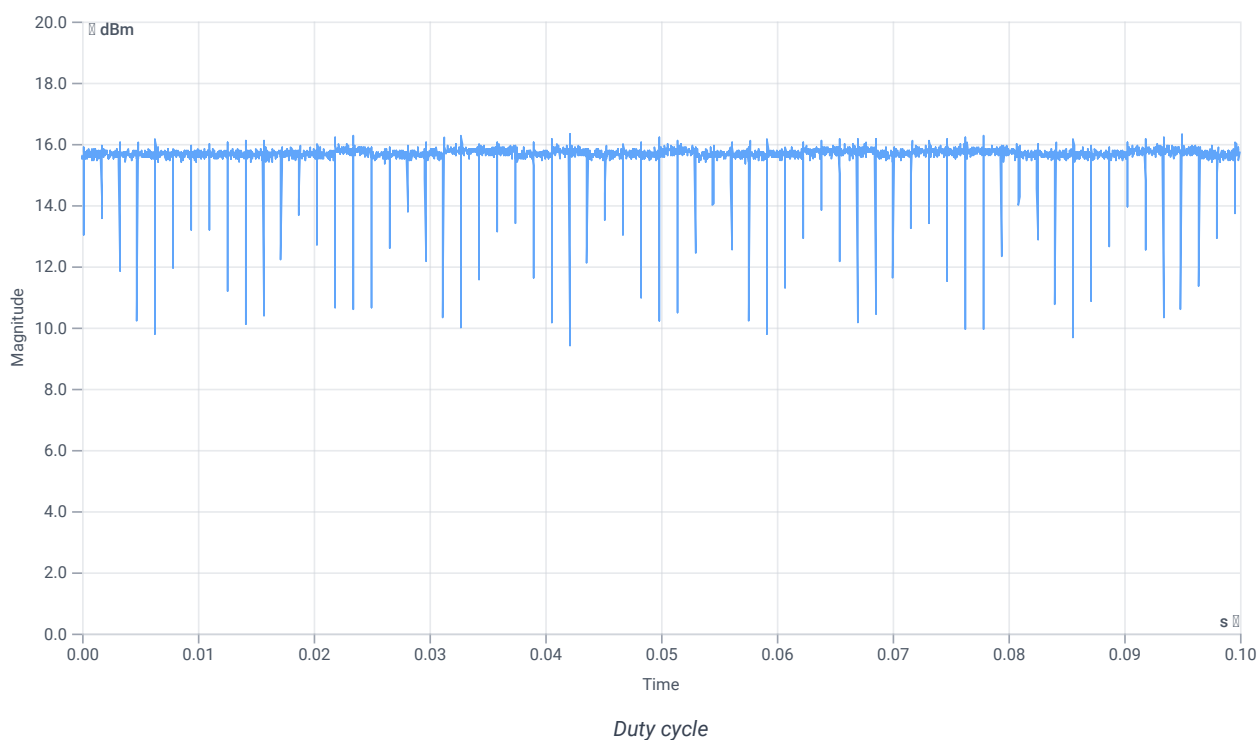

Evaluation Bandwidth

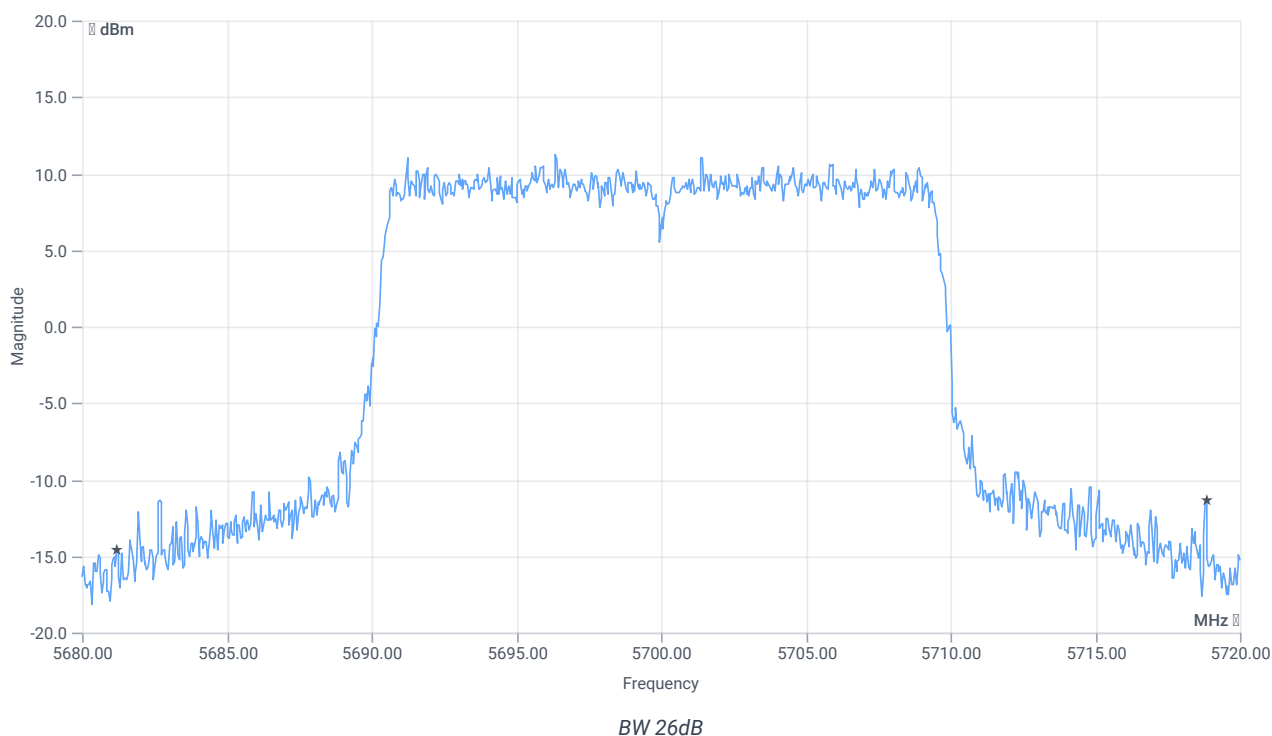


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	37.64	MHz	INFO
T1 26dB	---	---	5681.2000	MHz	INFO
T2 26dB	---	---	5718.8400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.52 16.5 30
Start [MHz] Stop [MHz]	5680.000 5720.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

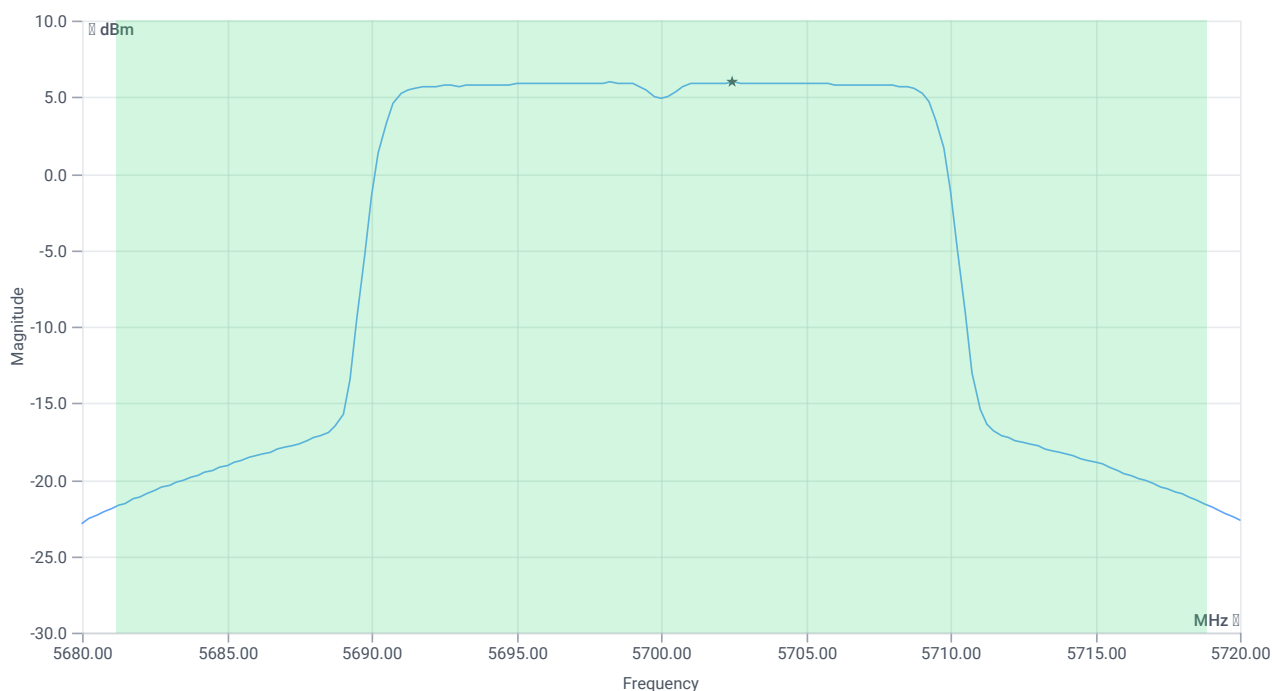

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	18.33	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	18.33	dBm	PASS
Limit: 11 dBm + 10 log 37.64					
Max Output Power DC corrected	---	26.76	18.33	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	5.96	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	5.96	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:18:19
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5700 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.56	dBm	INFO
Ref. Frequency	---	---	5694.010	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.56 16.5 25
Start [MHz] Stop [MHz]	5675.000 5725.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


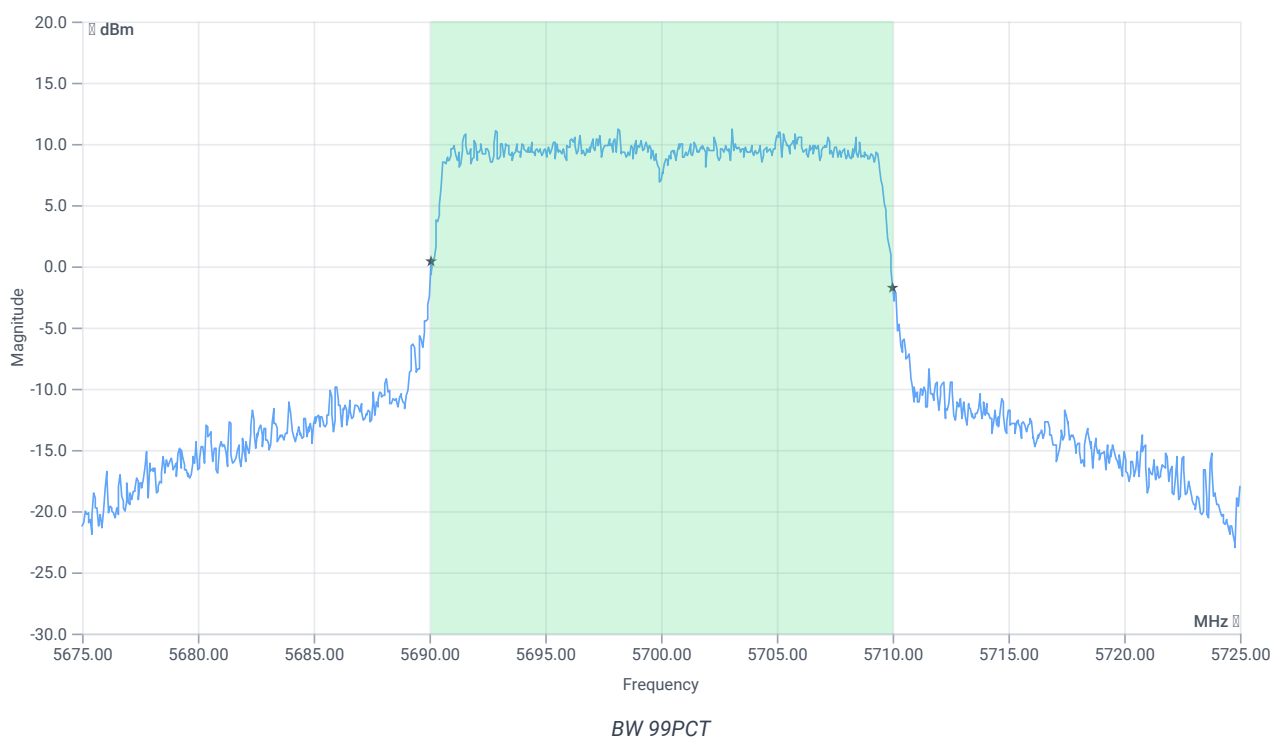


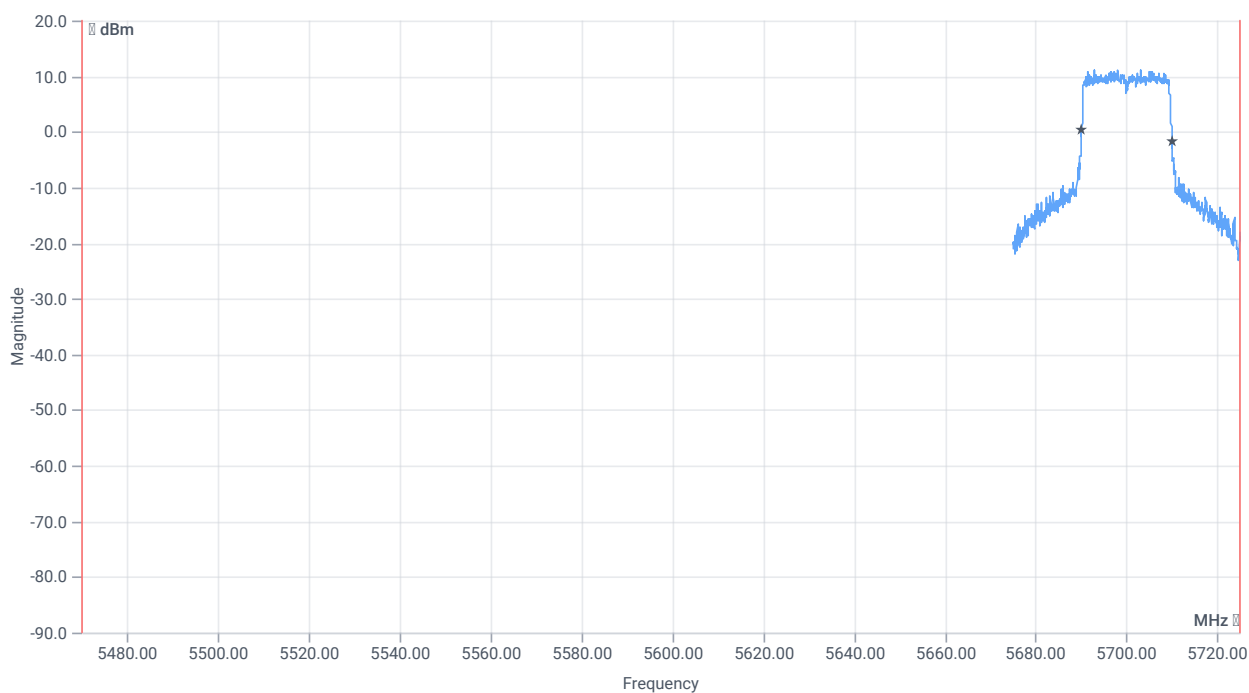

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.930	MHz	INFO
T1 99%	5470.000000	---	5690.0599	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5709.9900	MHz	

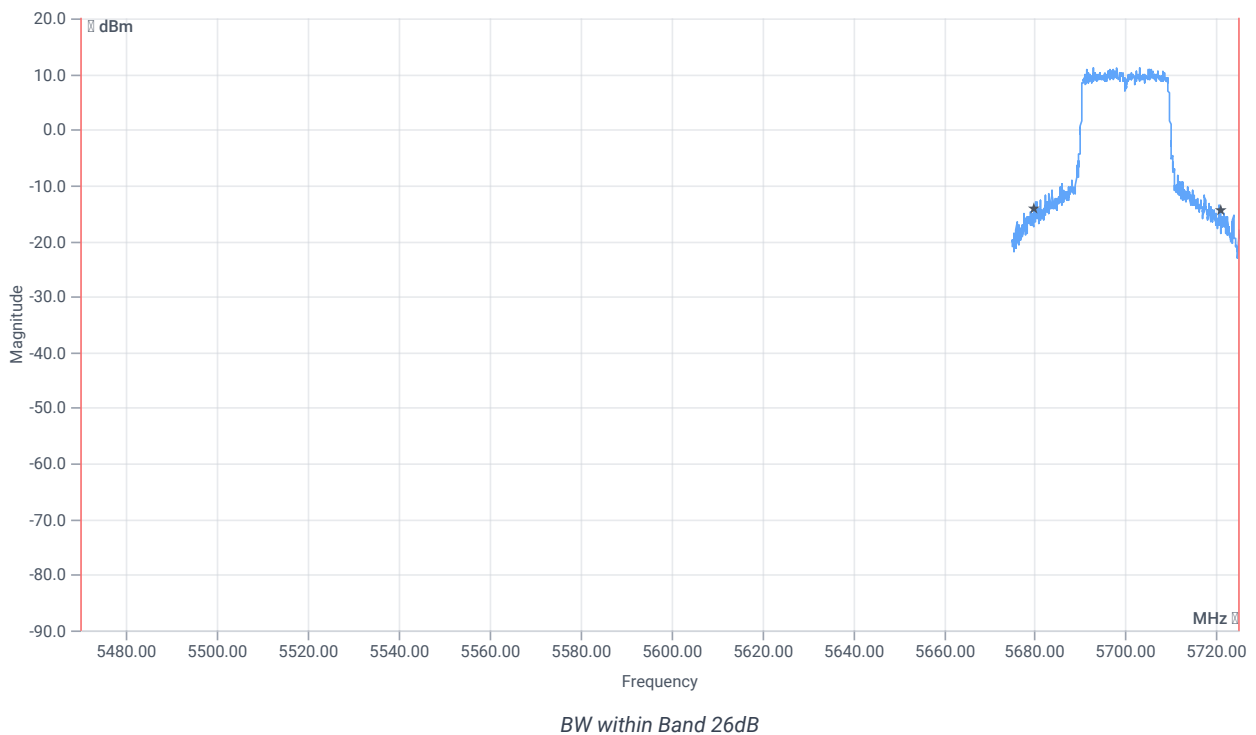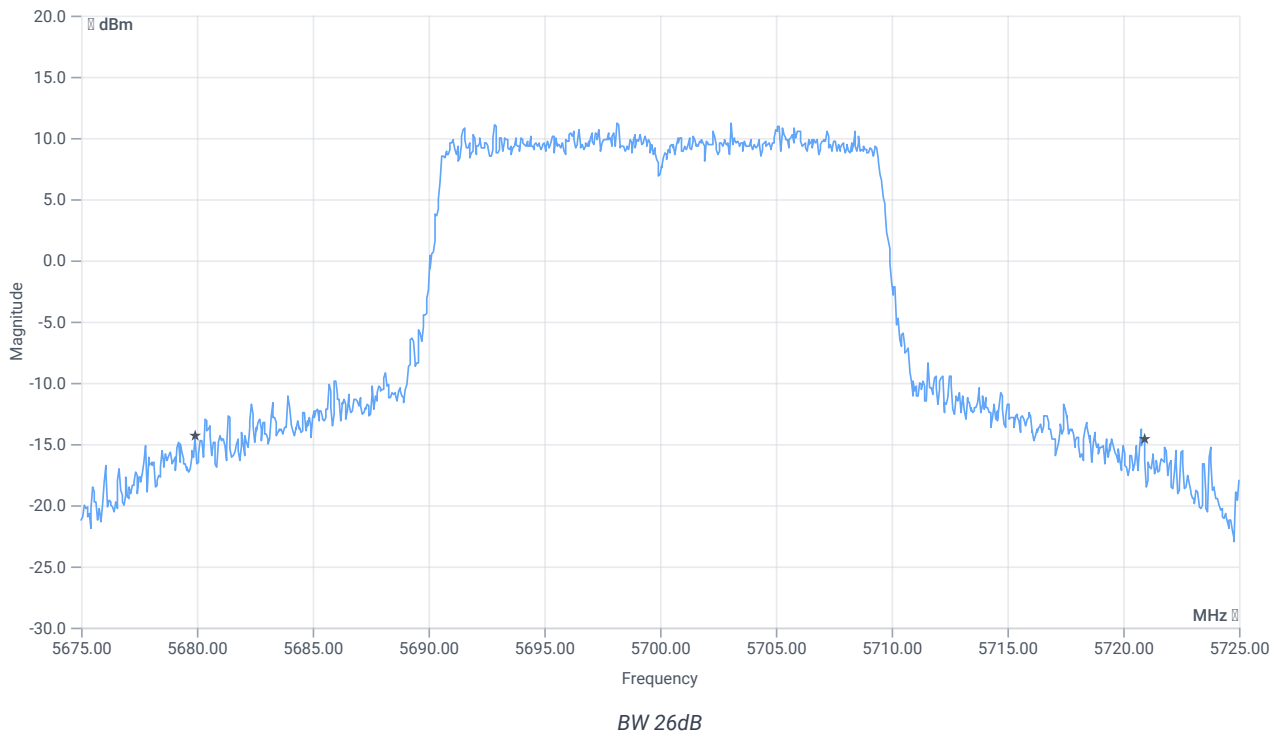

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5679.9000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5720.9000	MHz	

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:18:50
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5700 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.76	dBm	INFO
Ref. Frequency	---	---	5698.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

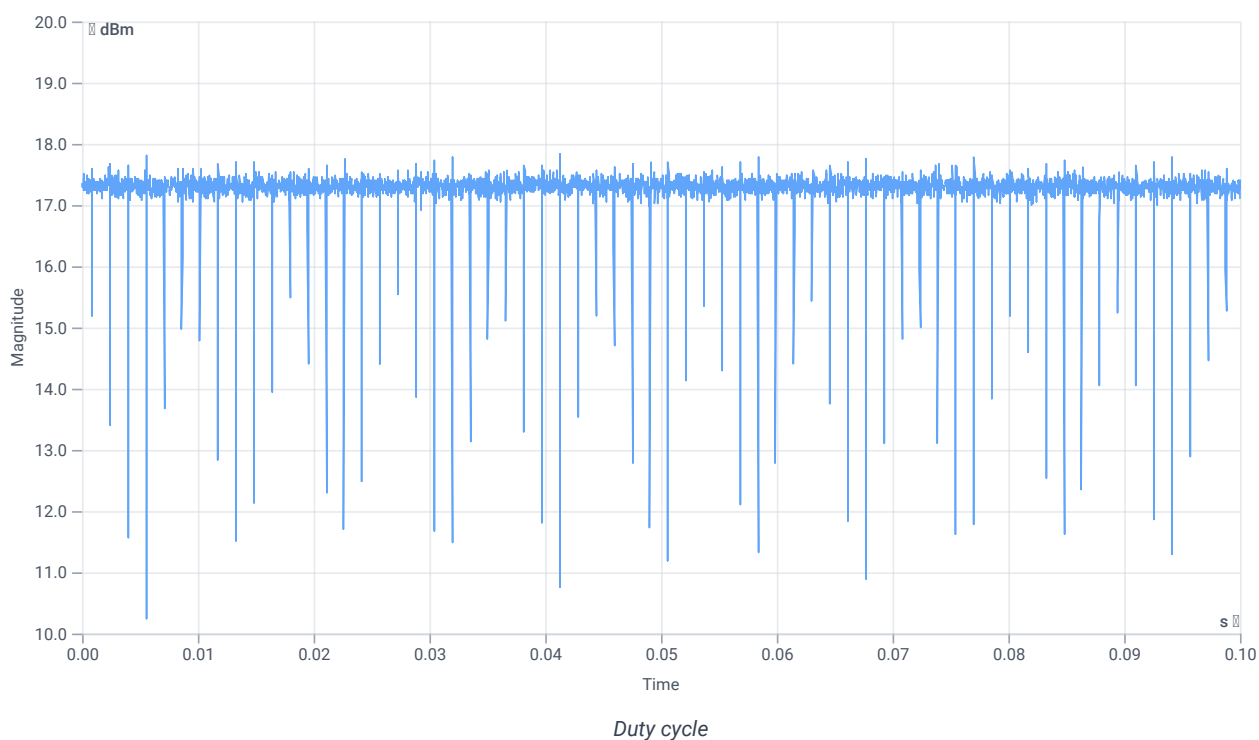

Evaluation Bandwidth

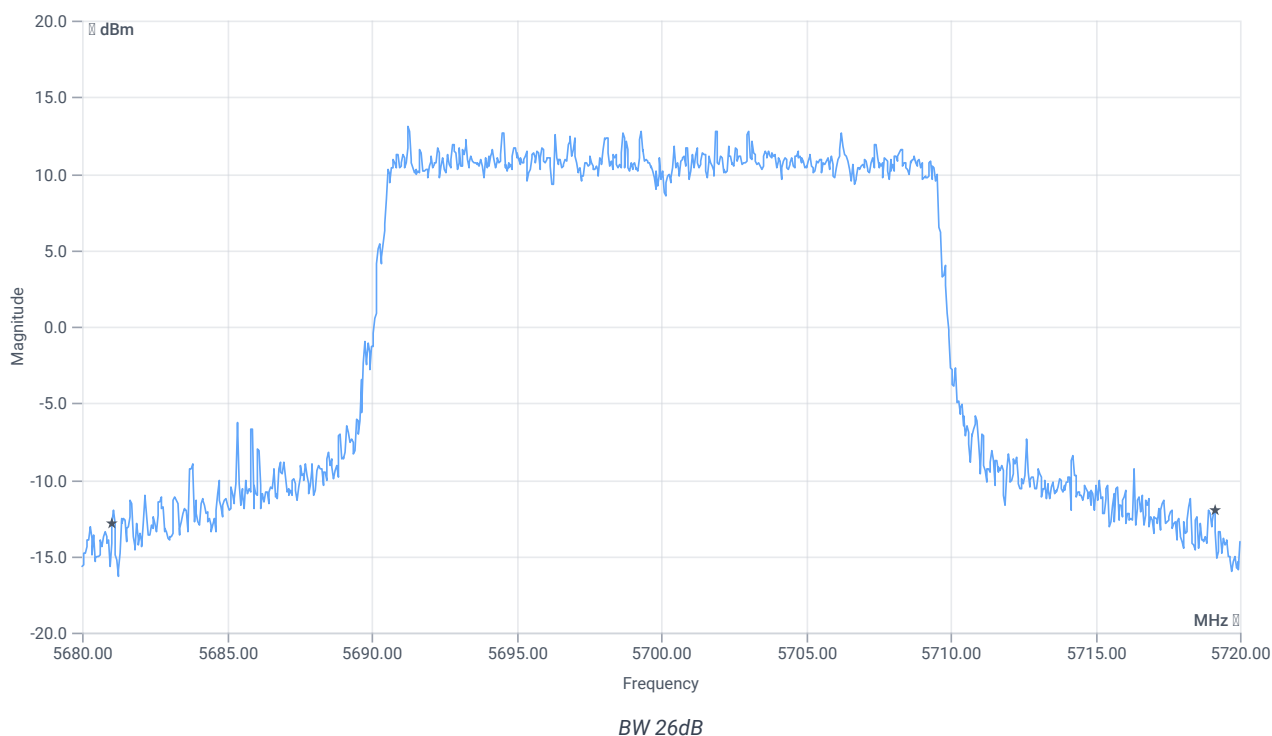


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	38.08	MHz	INFO
T1 26dB	---	---	5681.0400	MHz	INFO
T2 26dB	---	---	5719.1200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.76 16.5 30
Start [MHz] Stop [MHz]	5680.000 5720.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

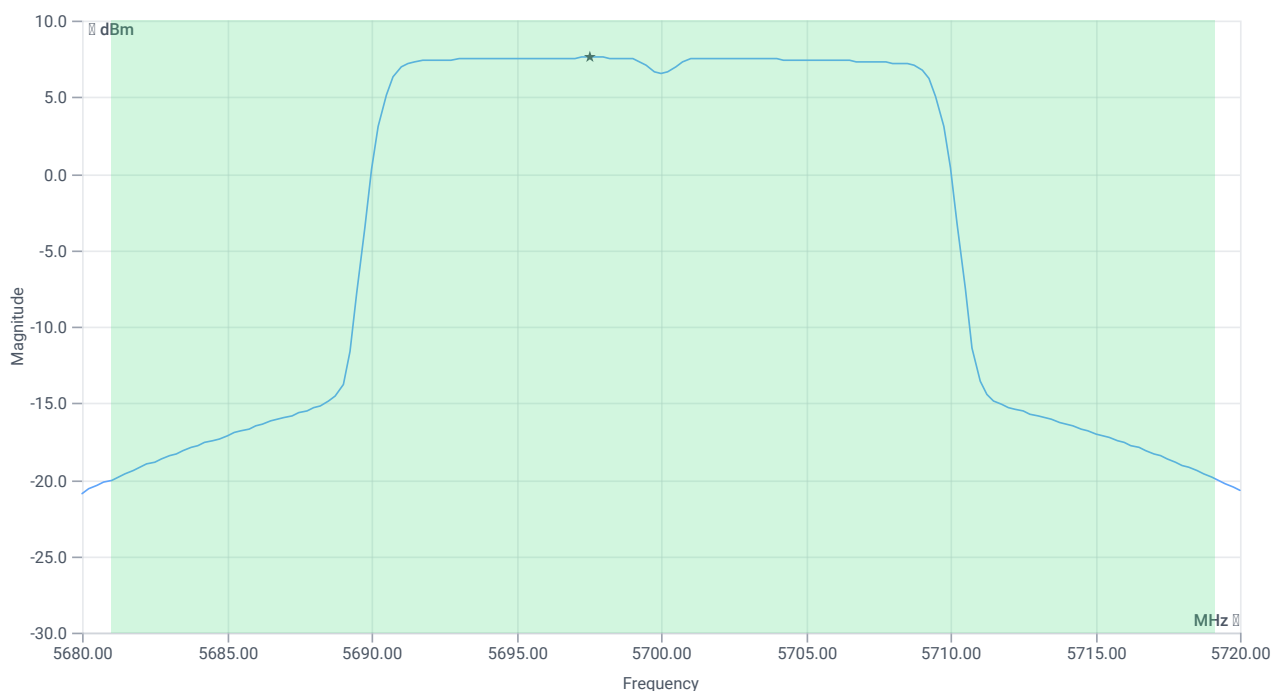

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.96	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	19.96	dBm	PASS
Limit: 11 dBm + 10 log 38.08					
Max Output Power DC corrected	---	26.81	19.96	dBm	PASS

Power Spectral Density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	7.58	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	7.58	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:20:16
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5700 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.81	dBm	INFO
Ref. Frequency	---	---	5695.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.81 16.5 25
Start [MHz] Stop [MHz]	5675.000 5725.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


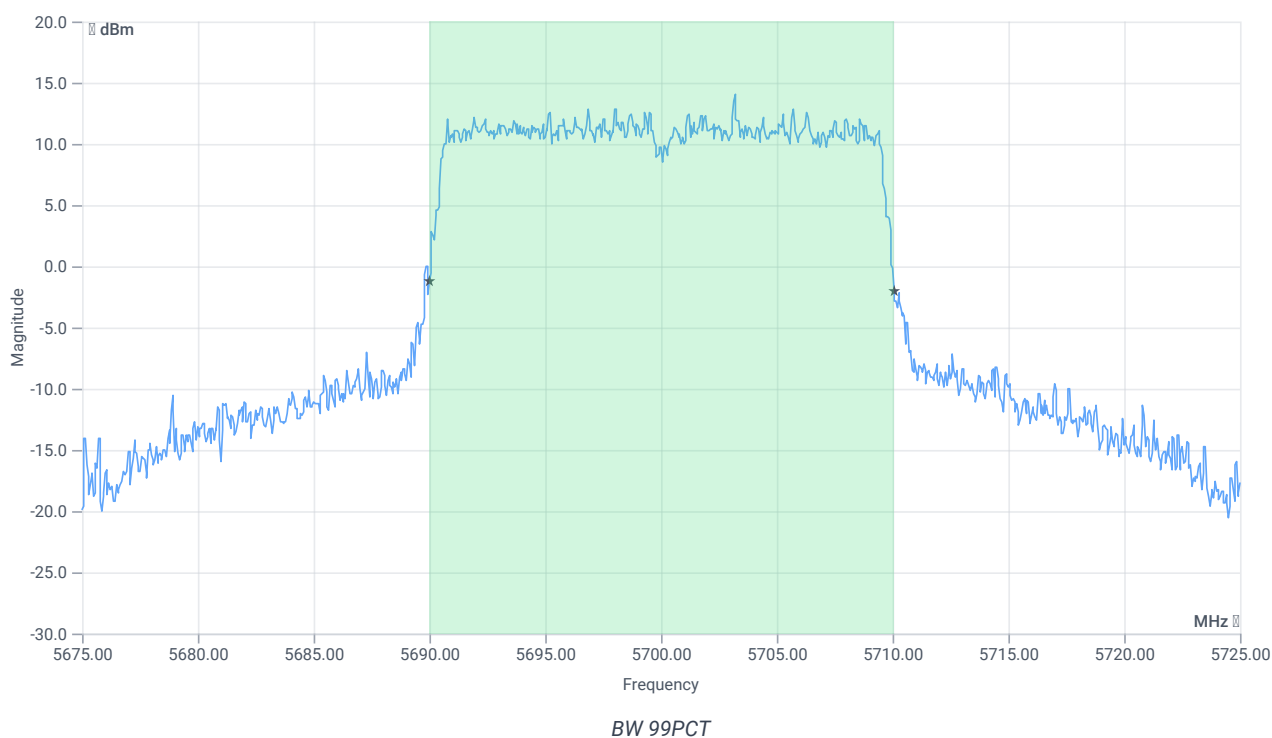


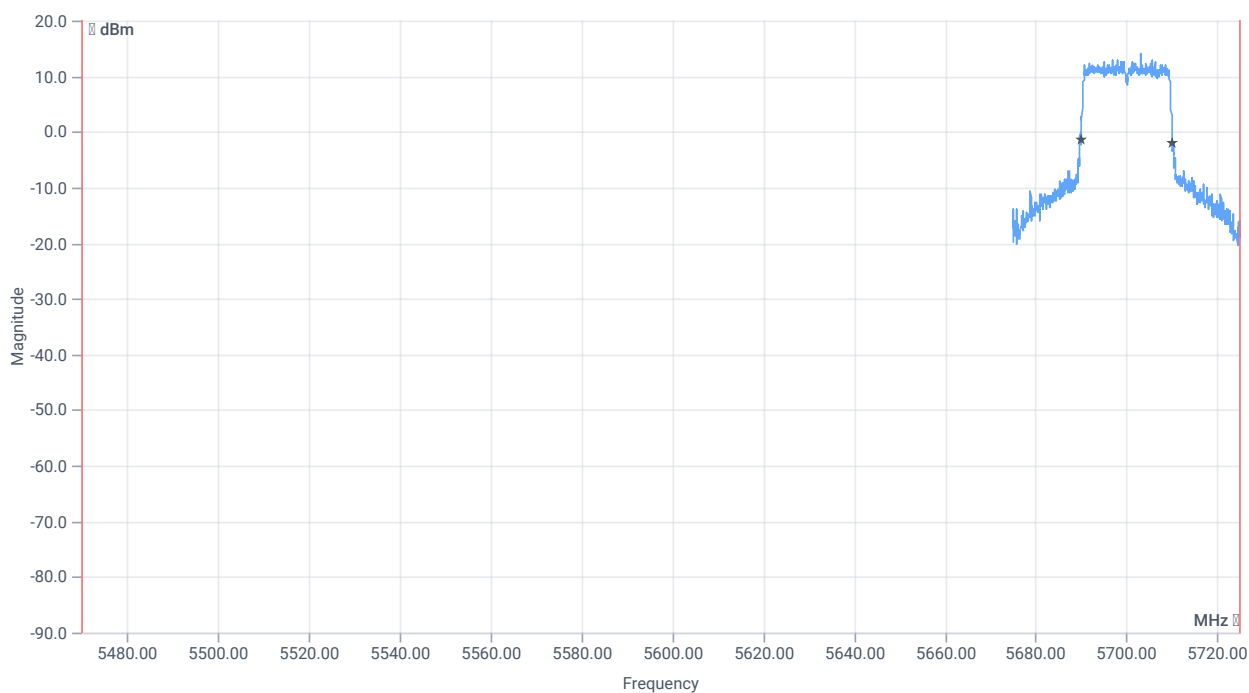

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	20.030	MHz	INFO
T1 99%	5470.000000	---	5690.0100	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5710.0400	MHz	

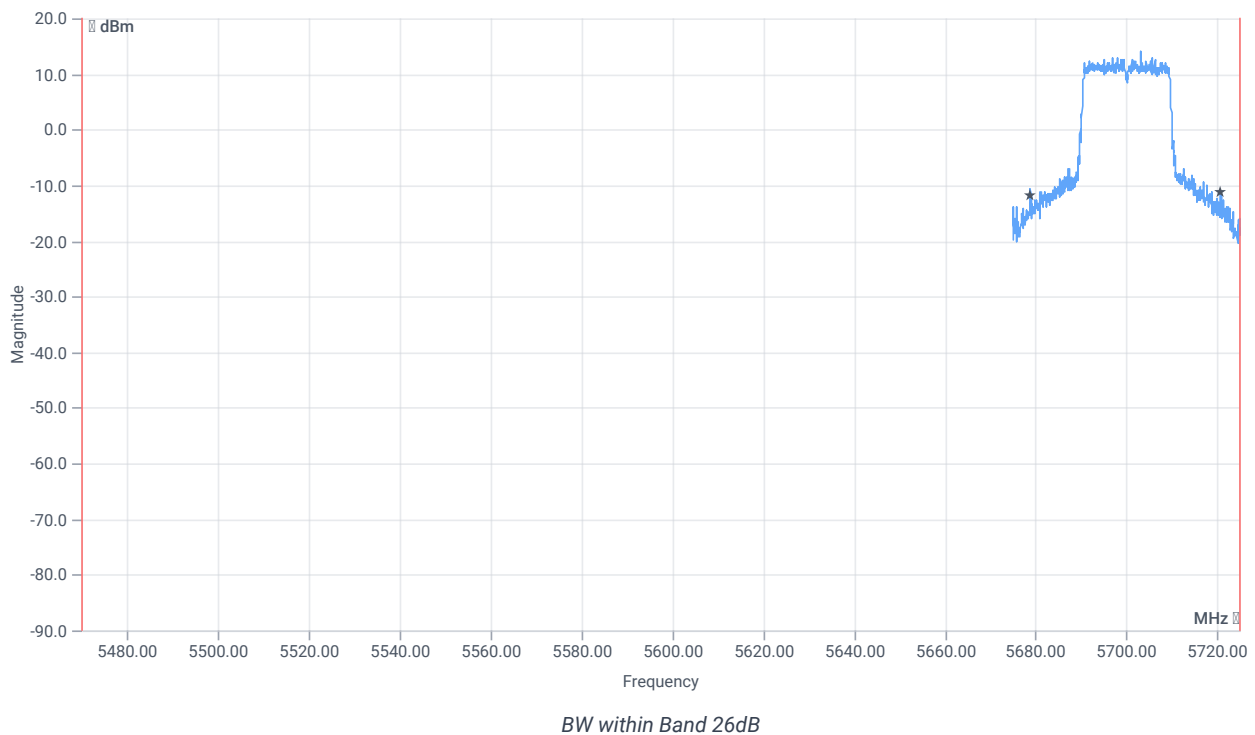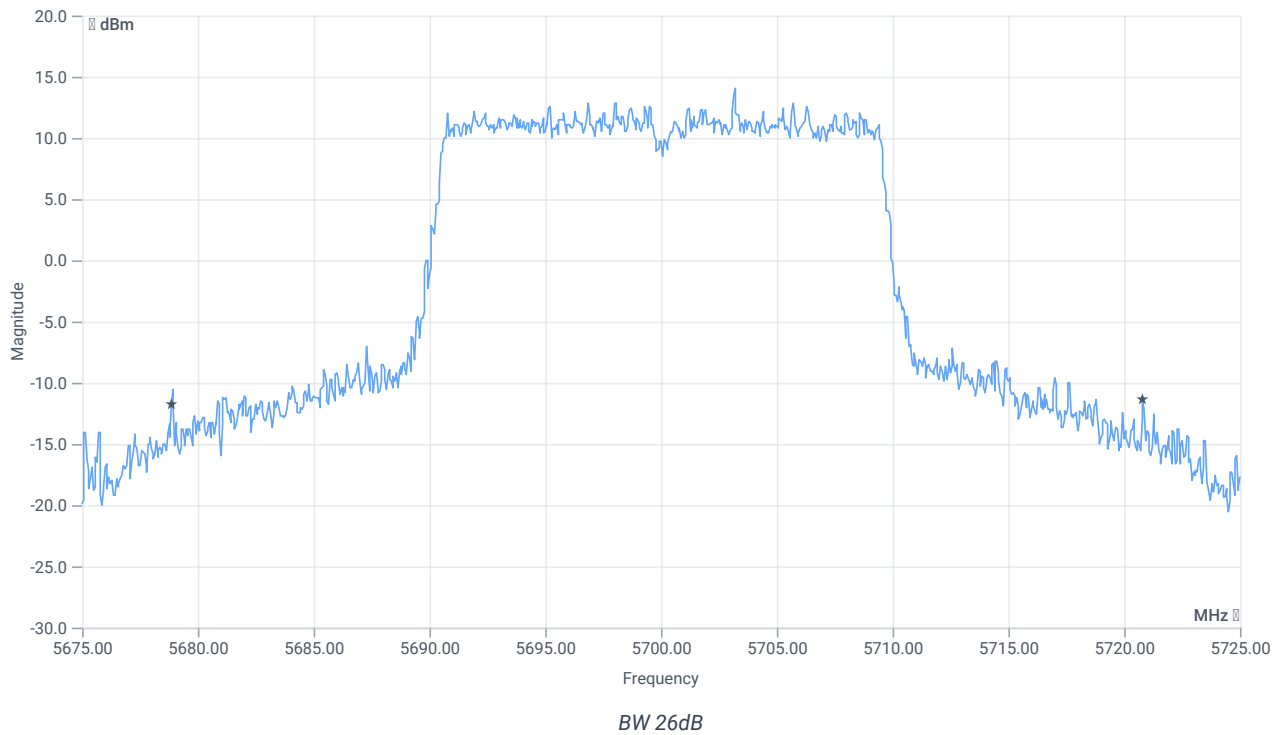

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41.95	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5678.8500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5720.8000	MHz	

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 13:20:47
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA Scan ax-HE20 U-NII-3
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 13:20:47
Message	set WLAN5Gx to ax-HE20 U-NII-3, Frequency [MHz] 5745 ,

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:21:14
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5745 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.14	dBm	INFO
Ref. Frequency	---	---	5741.800	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

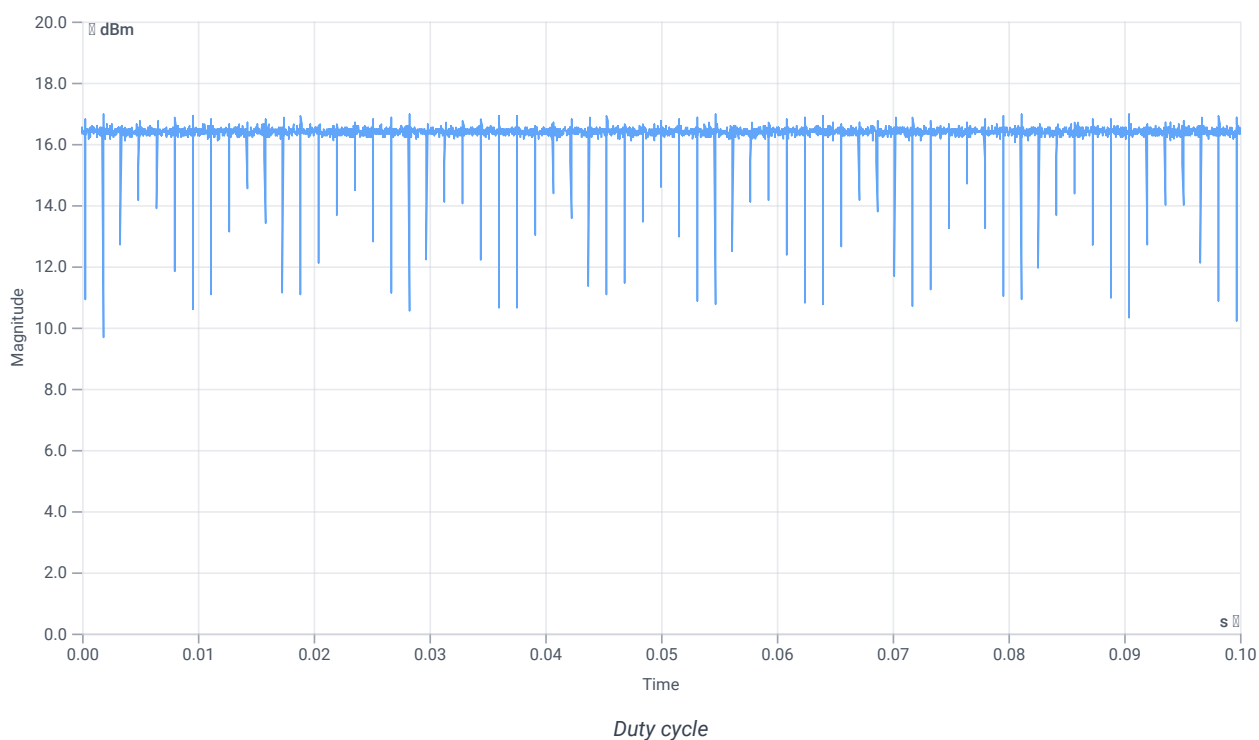

Evaluation Bandwidth

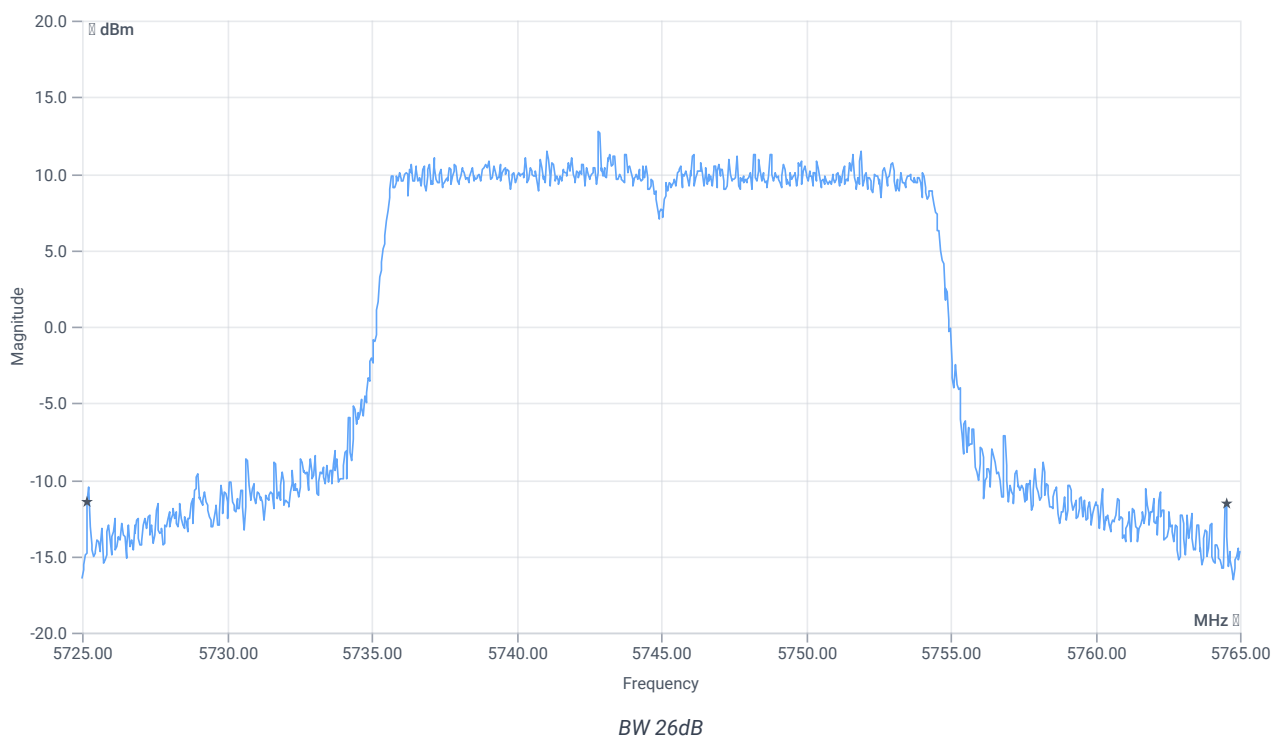


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.32	MHz	INFO
T1 26dB	---	---	5725.2000	MHz	INFO
T2 26dB	---	---	5764.5200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.14 16.72 25
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

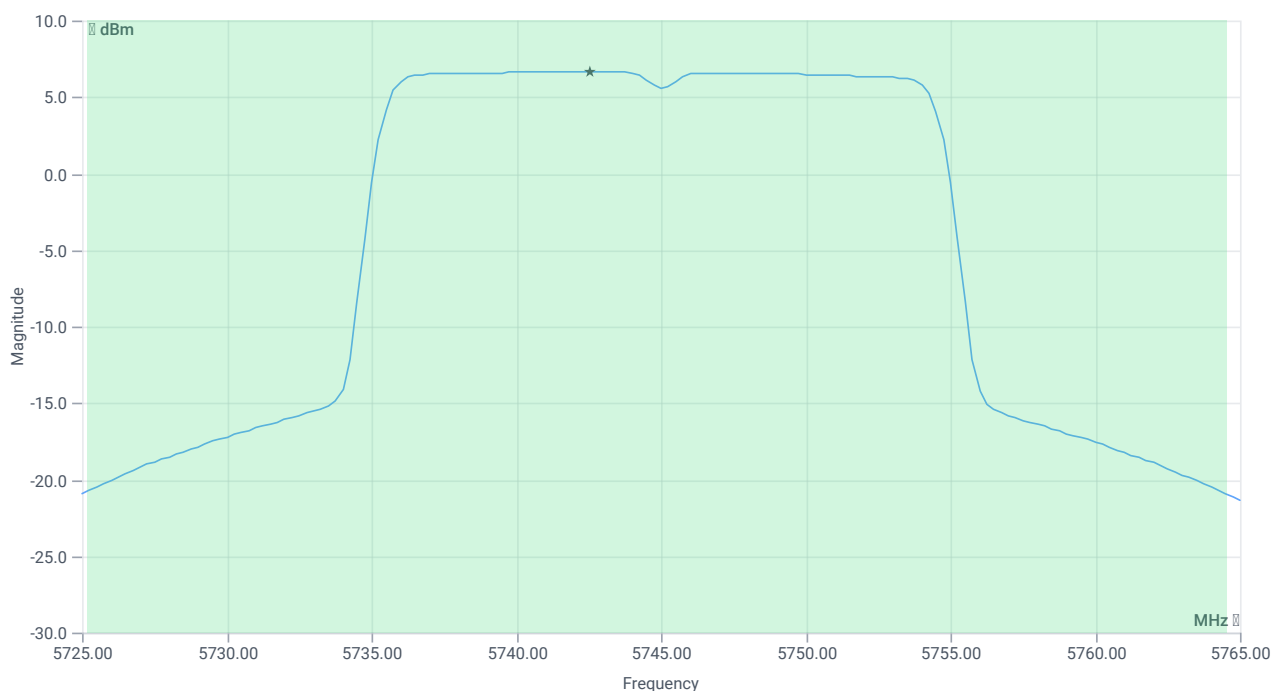

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.02	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	19.02	dBm	PASS
Limit: 11 dBm + 10 log 39.32					
Max Output Power DC corrected	---	26.95	19.02	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.14 16.72 30
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

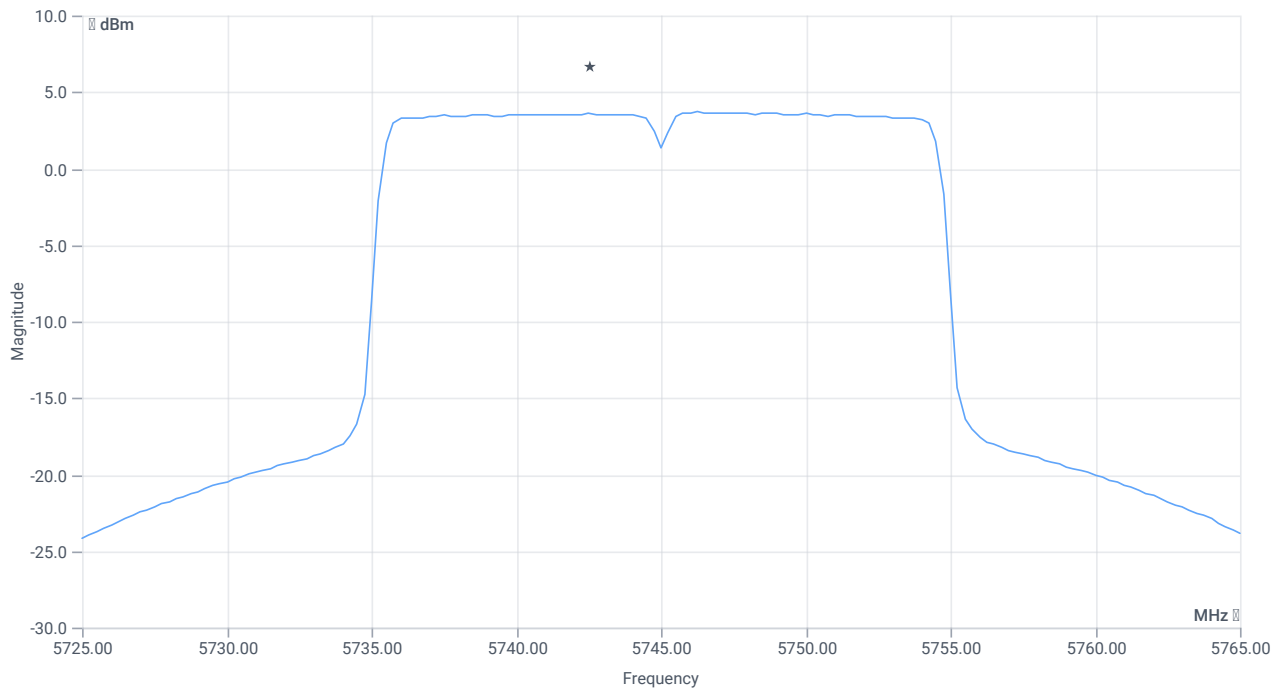

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	3.69	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	3.69	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:23:38
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5745 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.53	dBm	INFO
Ref. Frequency	---	---	5748.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.53 16.72 25
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

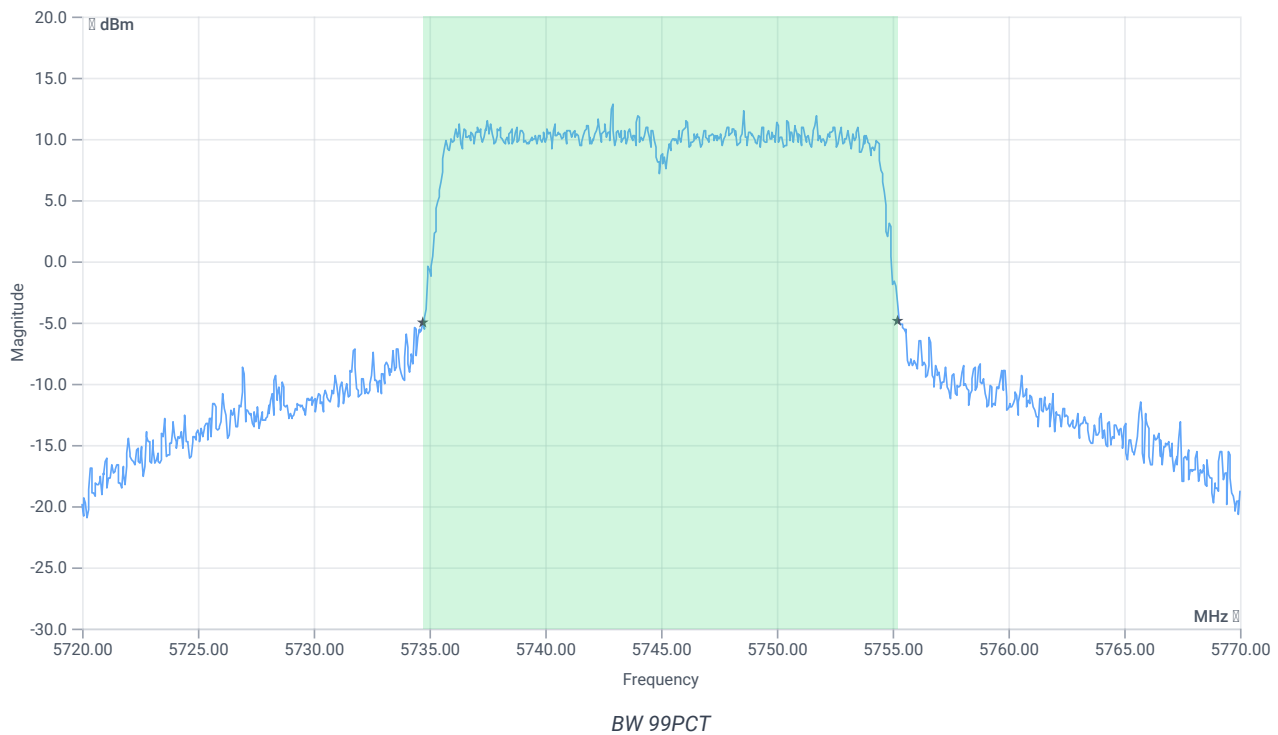




BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	20.529	MHz	INFO
T1 99%	5725.000000	---	5734.7103	MHz	PASS
T2 99%	---	5850.000000	5755.2398	MHz	PASS

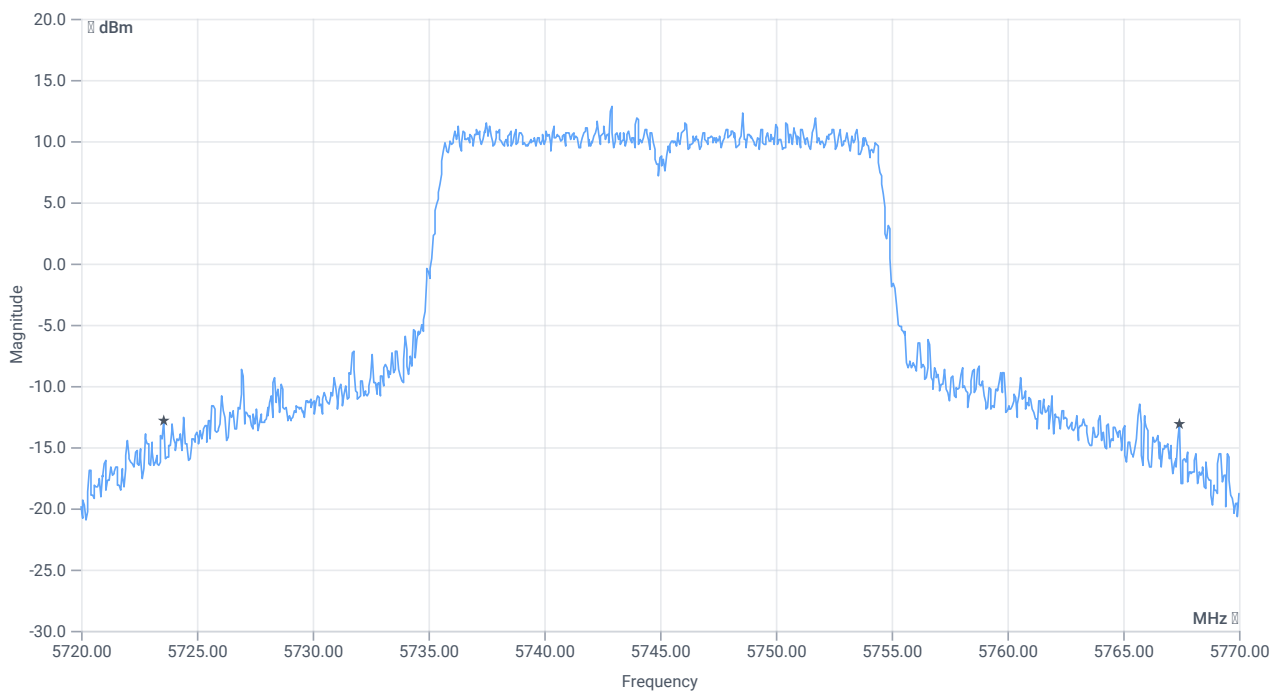

BW 26dB



BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	43.85	MHz	INFO
T1 26dB	5725.000000	---	5723.5500	MHz	DFS required
T2 26dB	---	5850.000000	5767.4000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:24:09
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5745 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.77	dBm	INFO
Ref. Frequency	---	---	5740.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.77 16.72 30
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

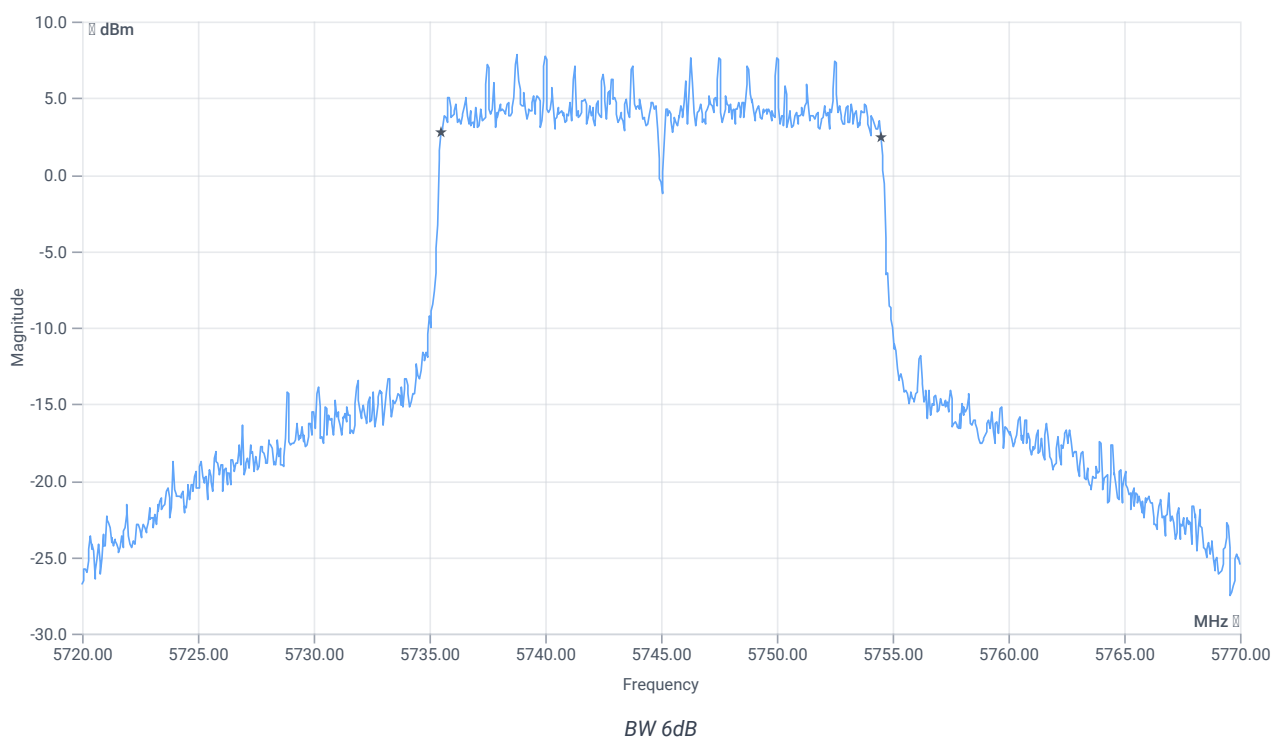

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	---	19	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:24:51
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5745 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.67	dBm	INFO
Ref. Frequency	---	---	5740.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

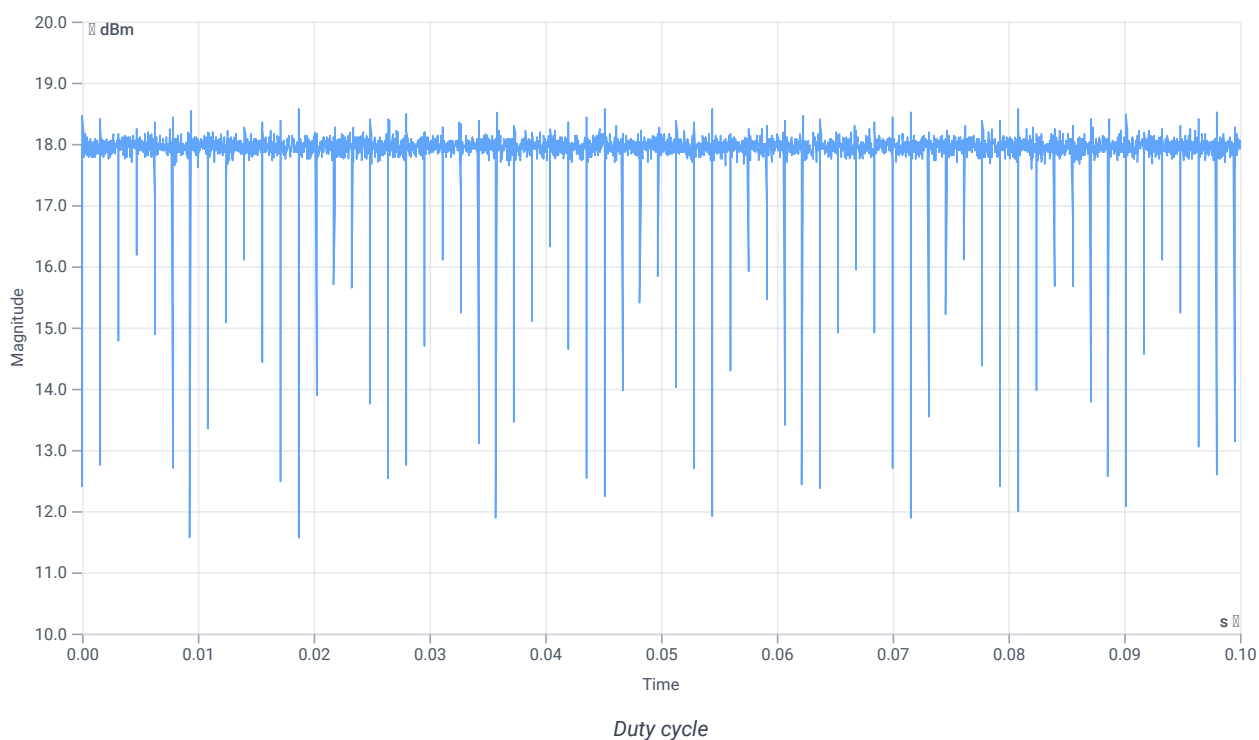

Evaluation Bandwidth

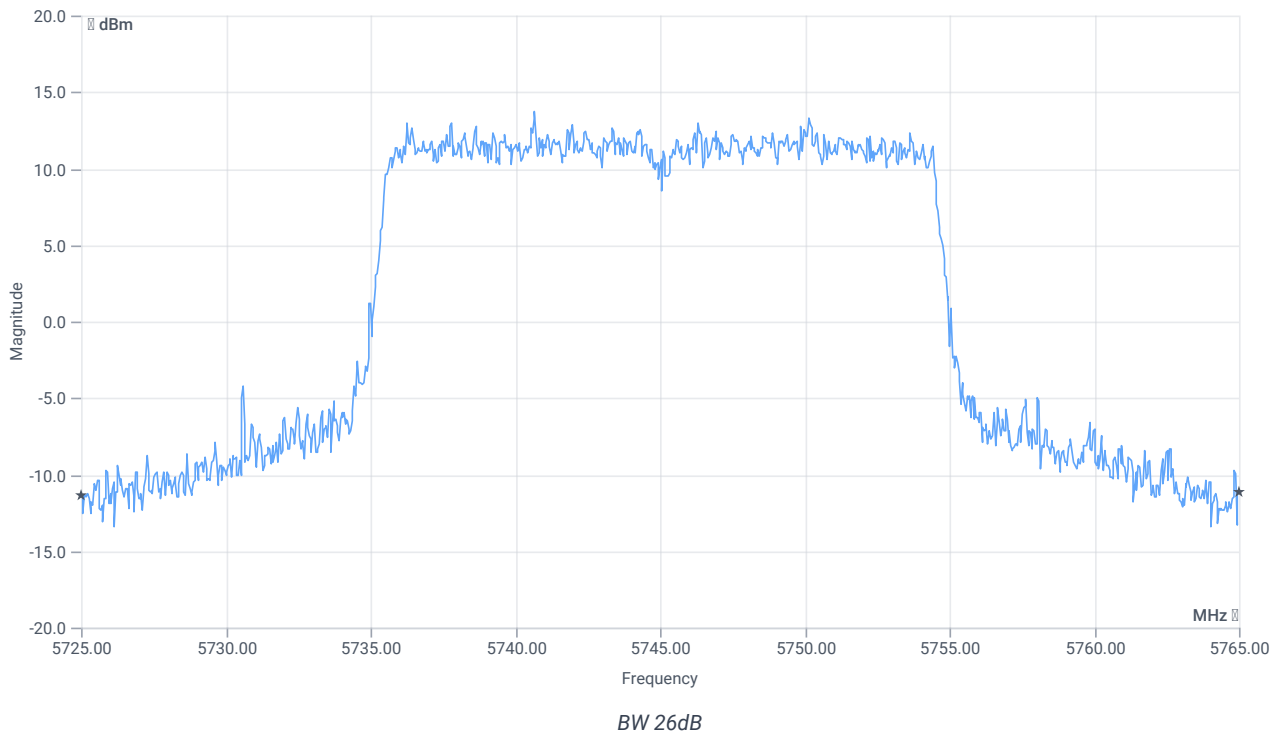


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5725.0000	MHz	INFO
T2 26dB	---	---	5765.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.67 16.72 30
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

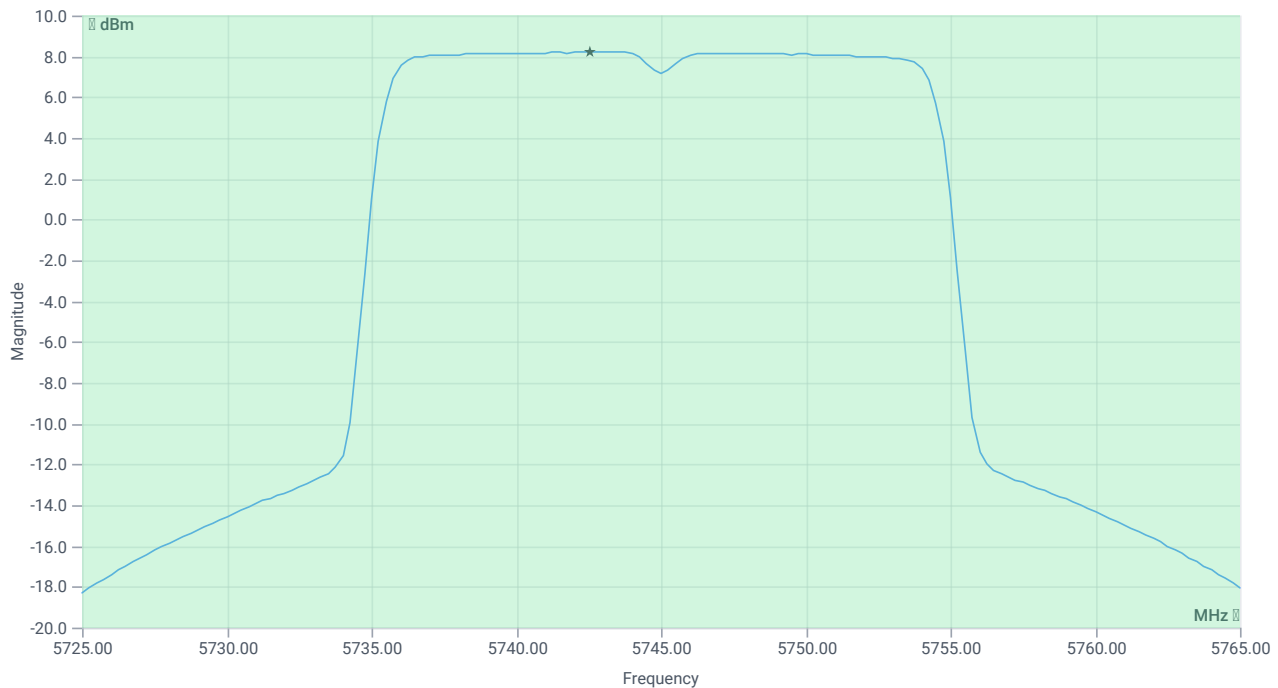

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	20.62	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	20.62	dBm	PASS
Limit: 11 dBm + 10 log 40					
Max Output Power DC corrected	---	27.02	20.62	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.67 16.72 30
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

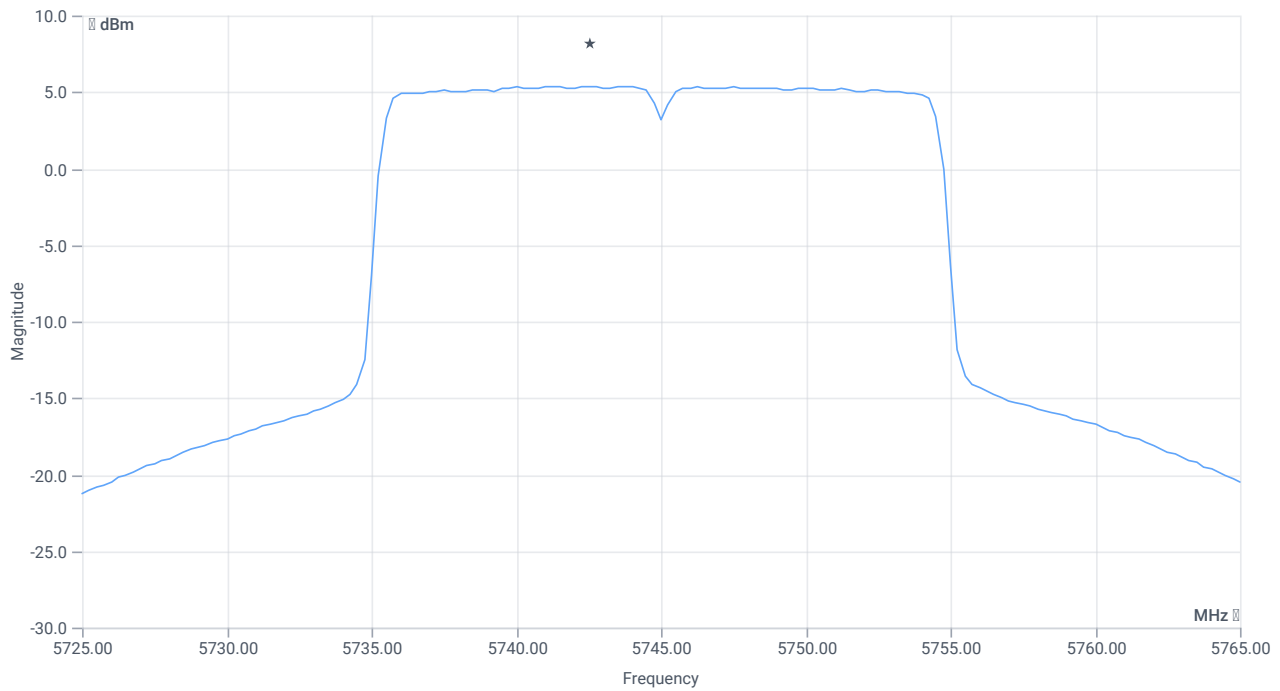

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	5.37	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	5.37	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:27:14
Ambit temp [°C] humidity [rel%]	26.8 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5745 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.55	dBm	INFO
Ref. Frequency	---	---	5744.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.55 16.72 25
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

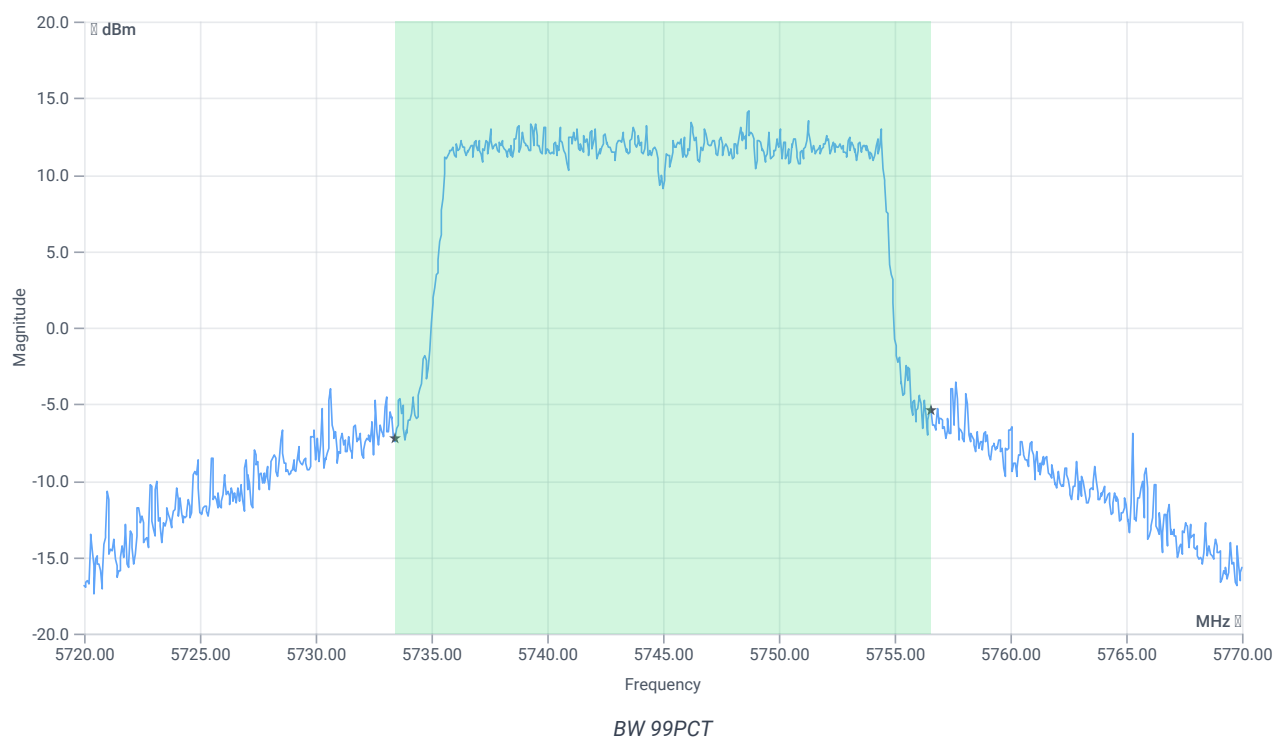


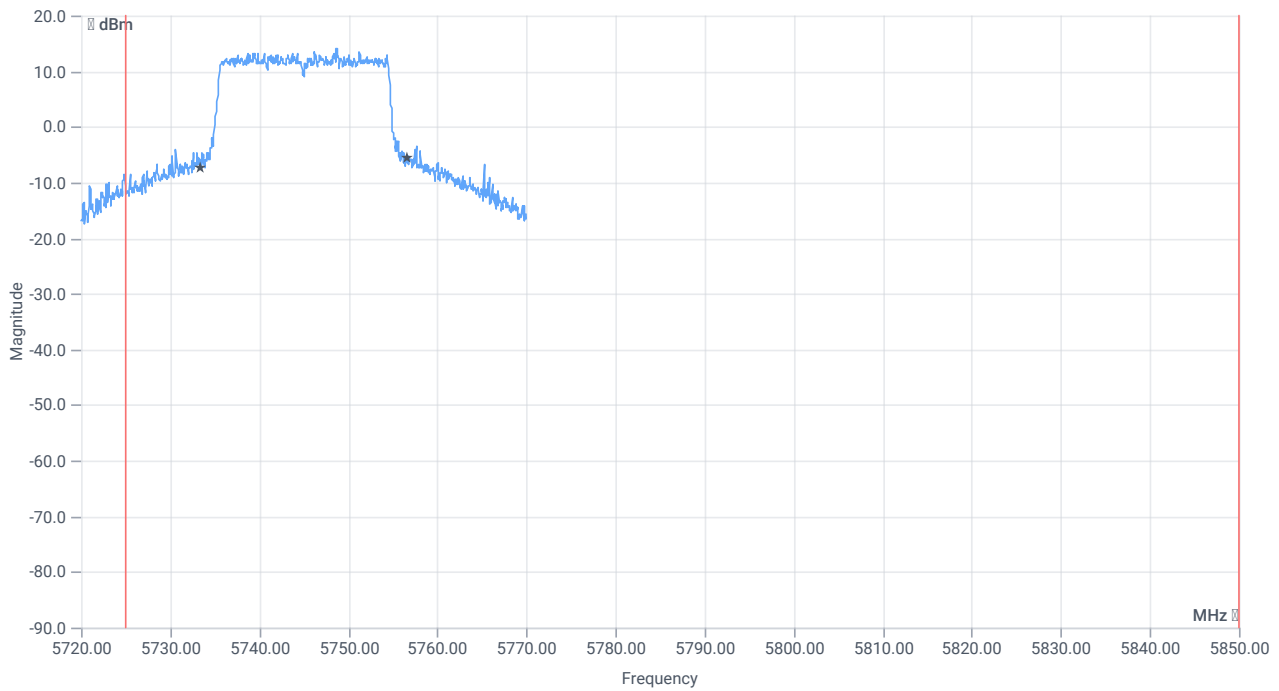

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	23.127	MHz	INFO
T1 99%	5725.000000	---	5733.4615	MHz	PASS
T2 99%	---	5850.000000	5756.5884	MHz	PASS

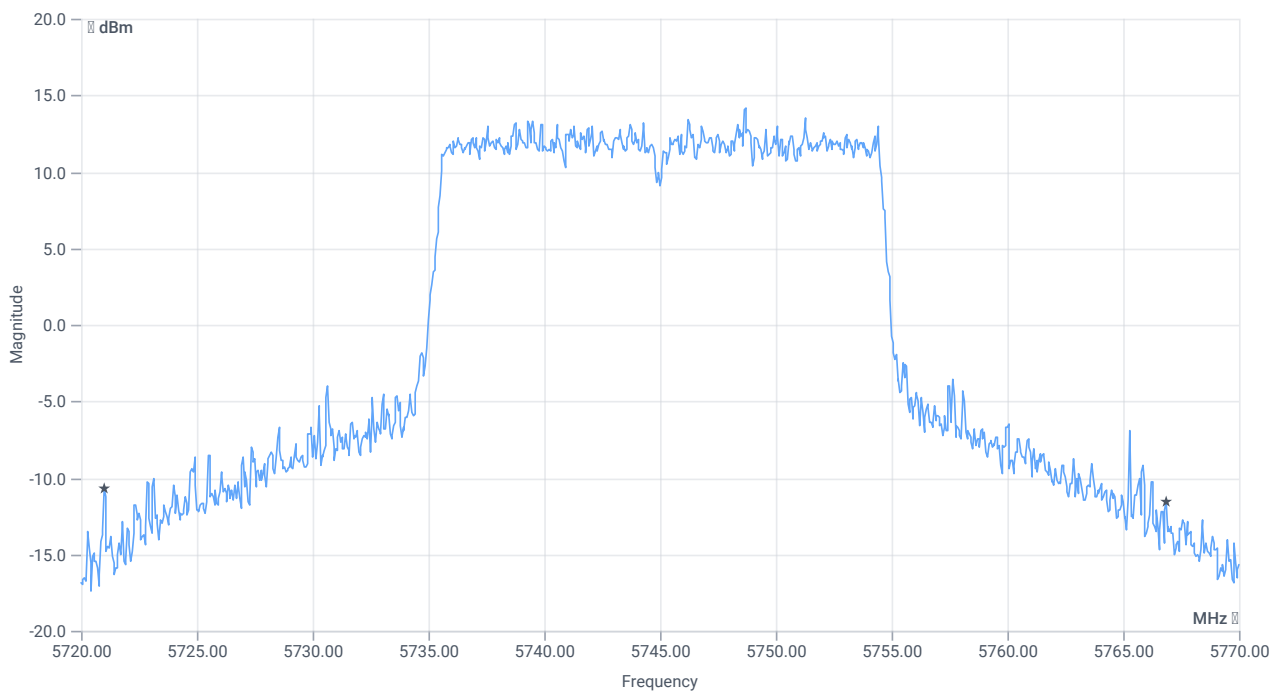

BW 26dB



BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	45.85	MHz	INFO
T1 26dB	5725.000000	---	5721.0000	MHz	DFS required
T2 26dB	---	5850.000000	5766.8500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:27:45
Ambit temp [°C] humidity [rel%]	26.8 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5745 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	18.01	dBm	INFO
Ref. Frequency	---	---	5748.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	30.01 16.72 30
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

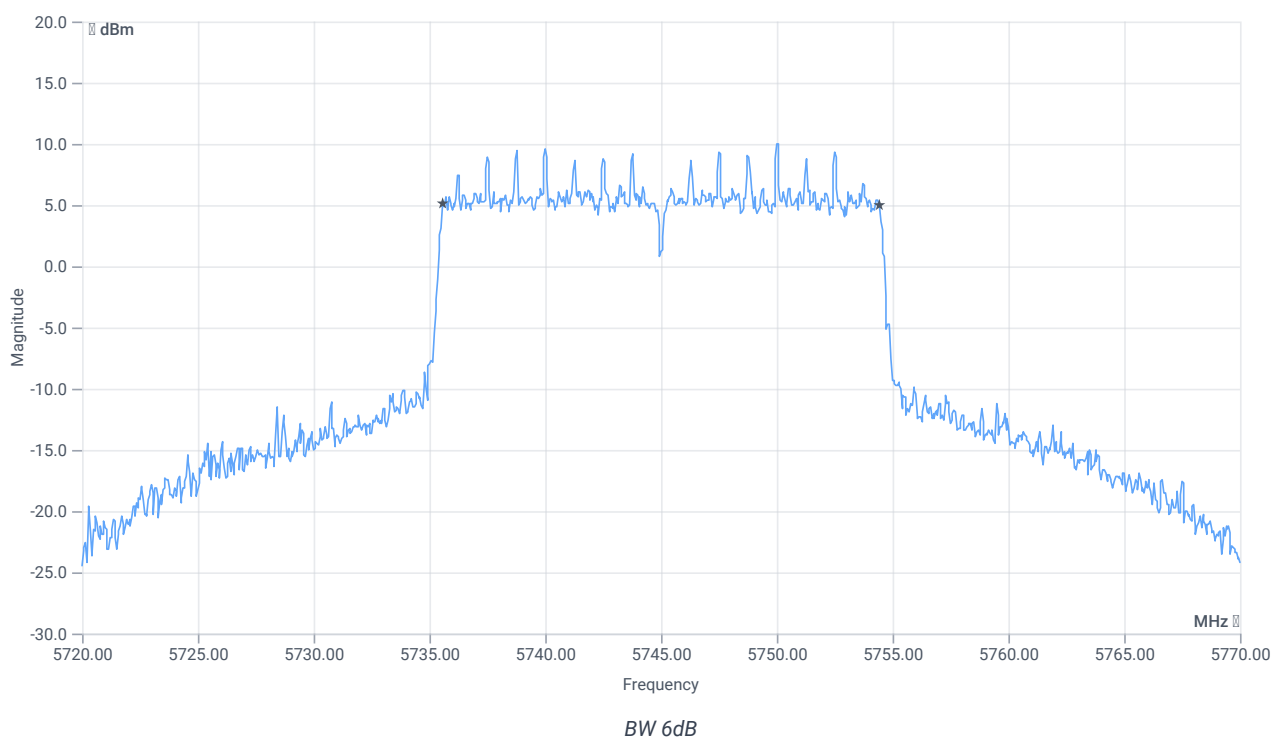

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	---	18.9	MHz	PASS

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 13:28:27
Ambit temp [°C] humidity [rel%]	26.8 48
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA Scan ax-HE20 U-NII-3
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 13:28:28
Message	set WLAN5Gx to ax-HE20 U-NII-3, Frequency [MHz] 5785 ,

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:29:28
Ambit temp [°C] humidity [rel%]	26.8 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5785 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.27	dBm	INFO
Ref. Frequency	---	---	5781.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

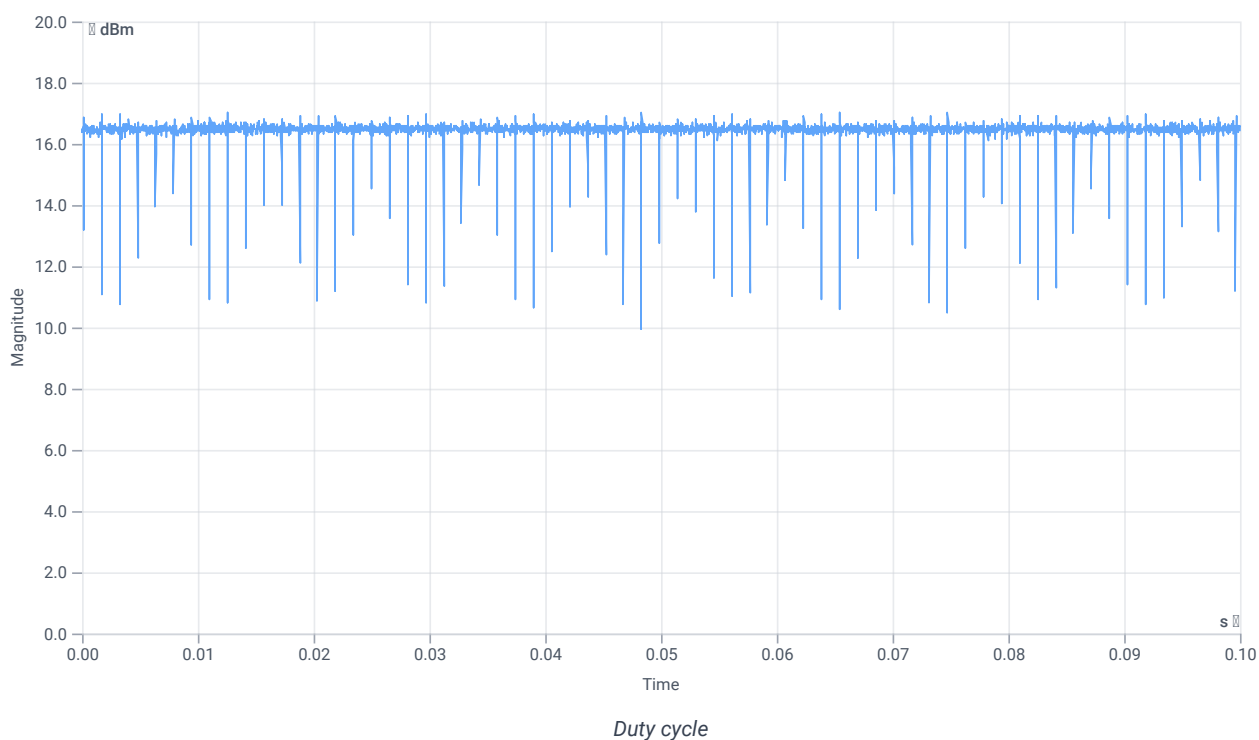

Evaluation Bandwidth

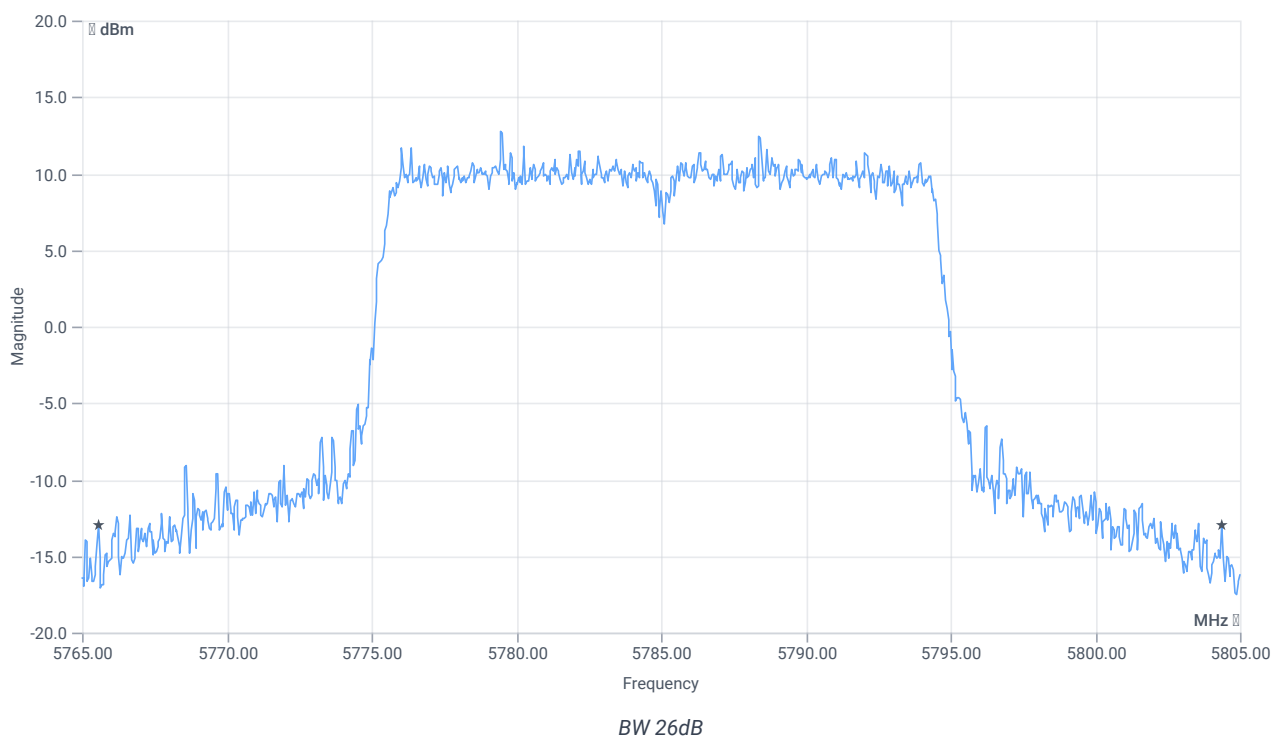


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	38.84	MHz	INFO
T1 26dB	---	---	5765.5600	MHz	INFO
T2 26dB	---	---	5804.4000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.27 16.7 25
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

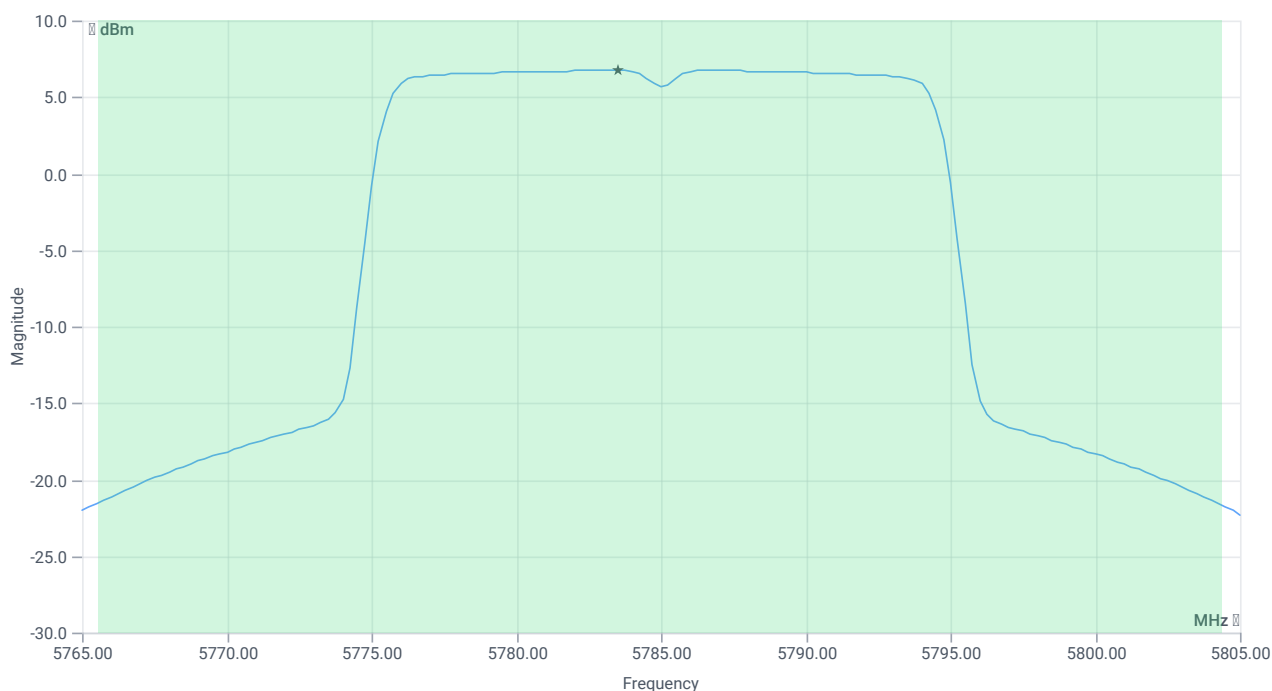

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.08	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	19.08	dBm	PASS
Limit: 11 dBm + 10 log 38.84					
Max Output Power DC corrected	---	26.89	19.08	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.27 16.7 30
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

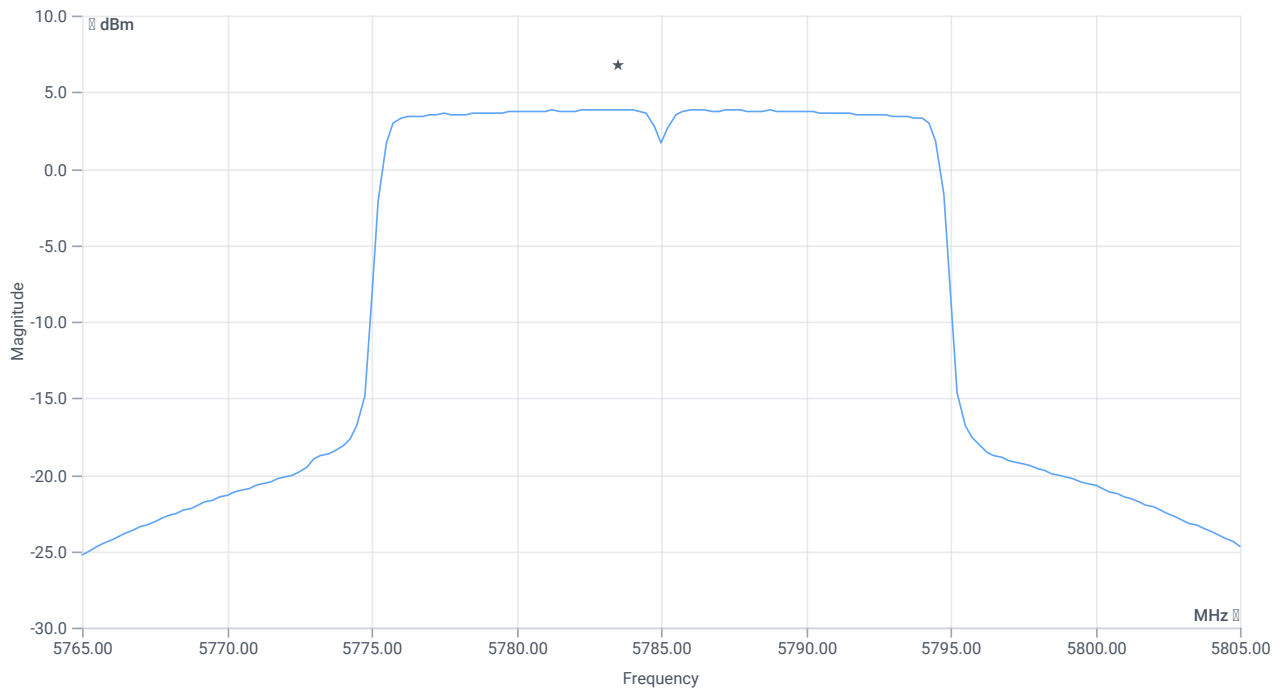

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	3.87	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	3.87	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:31:52
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5785 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.63	dBm	INFO
Ref. Frequency	---	---	5779.010	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.63 16.7 25
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

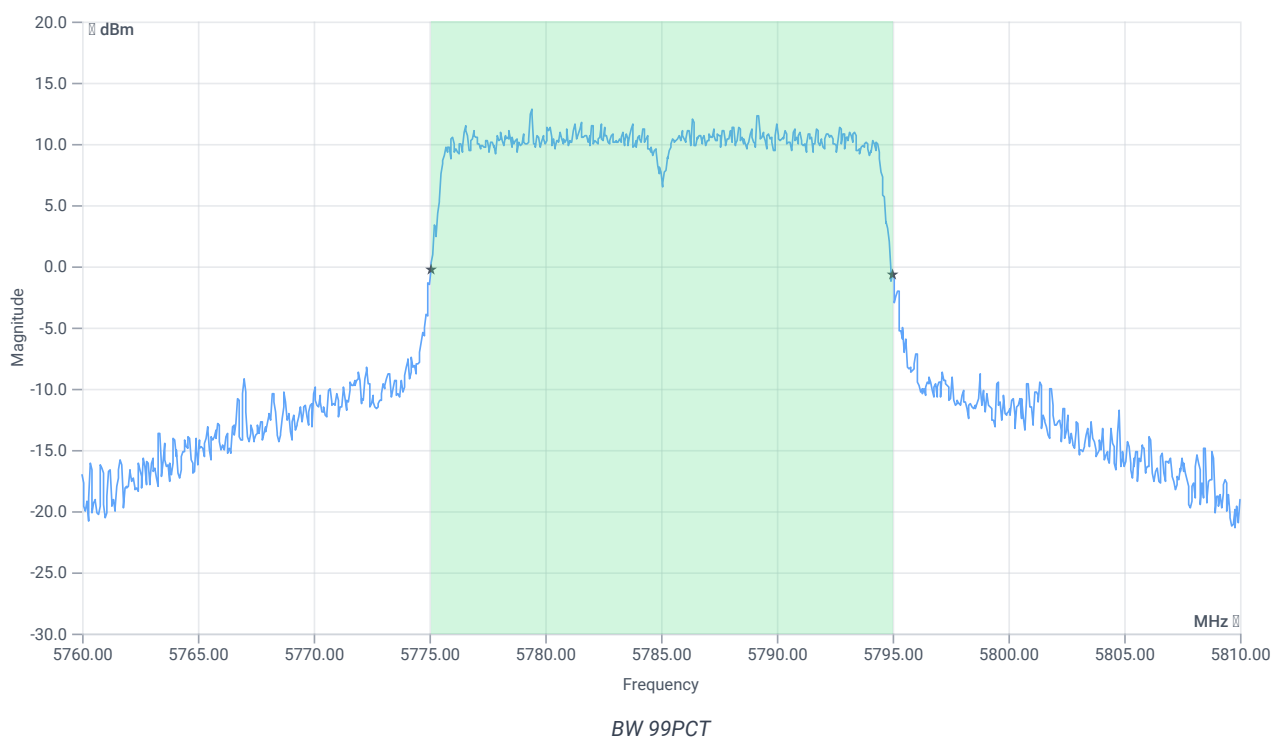


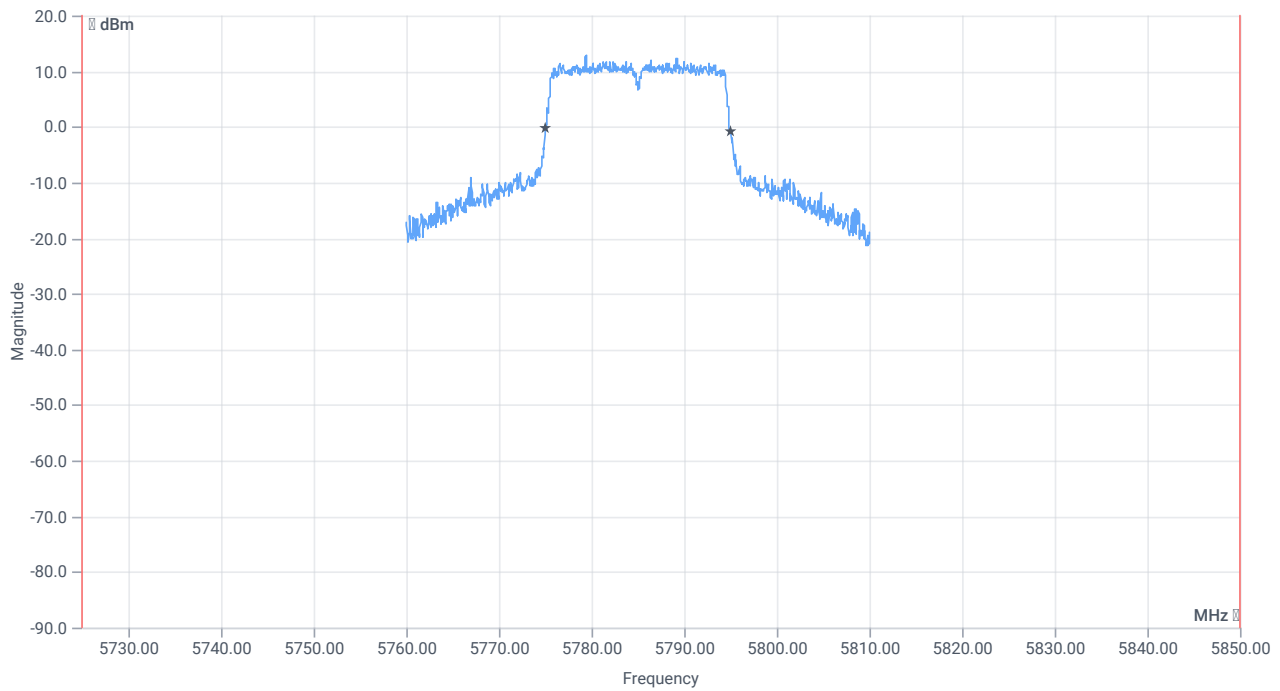

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.930	MHz	INFO
T1 99%	5725.000000	---	5775.0599	MHz	PASS
T2 99%	---	5850.000000	5794.9900	MHz	PASS

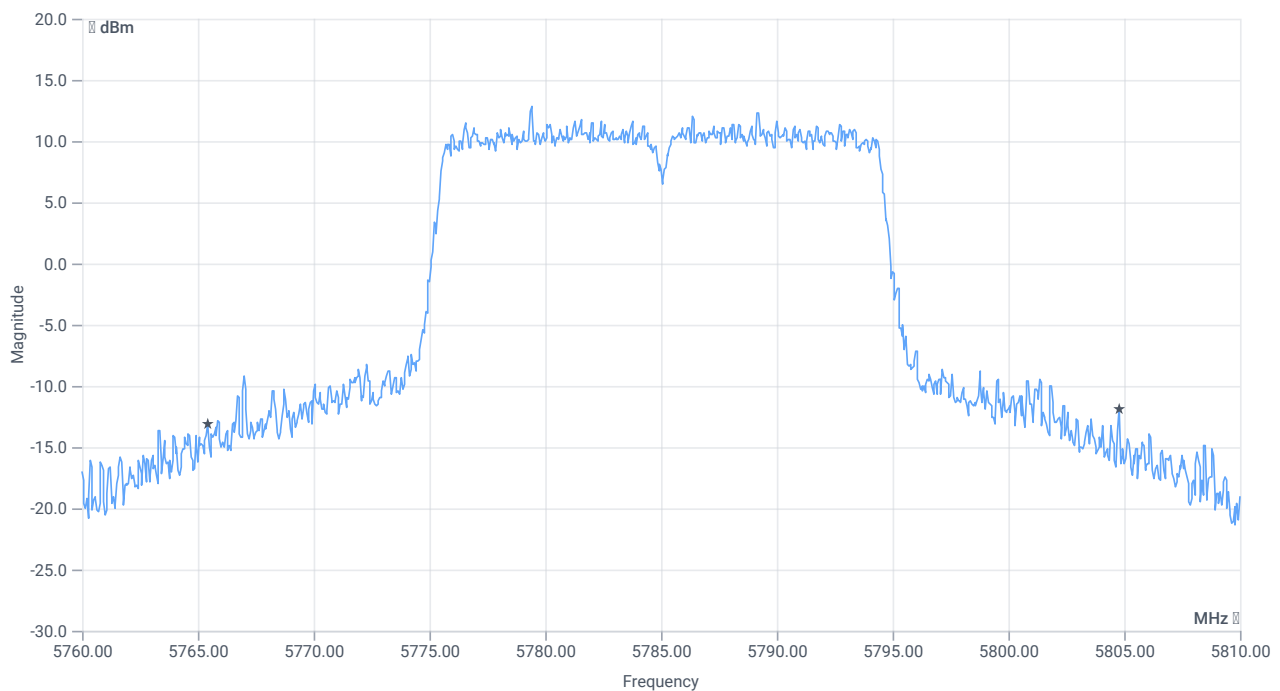

BW 26dB



BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.4	MHz	INFO
T1 26dB	5725.000000	---	5765.4000	MHz	PASS
T2 26dB	---	5850.000000	5804.8000	MHz	PASS

Verdict
PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:32:22
Ambit temp [°C] humidity [rel%]	26.8 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5785 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.72	dBm	INFO
Ref. Frequency	---	---	5789.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.72 16.7 30
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

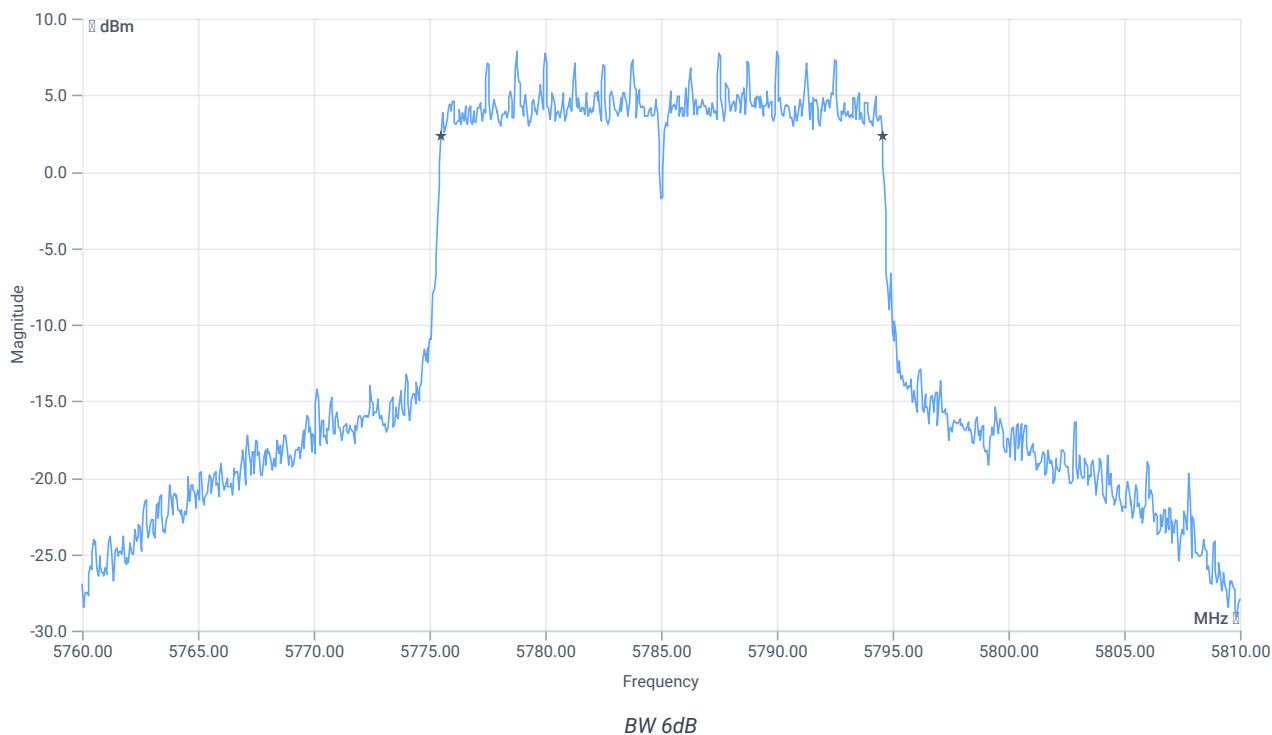

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	---	19.05	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:33:09
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5785 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.78	dBm	INFO
Ref. Frequency	---	---	5783.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

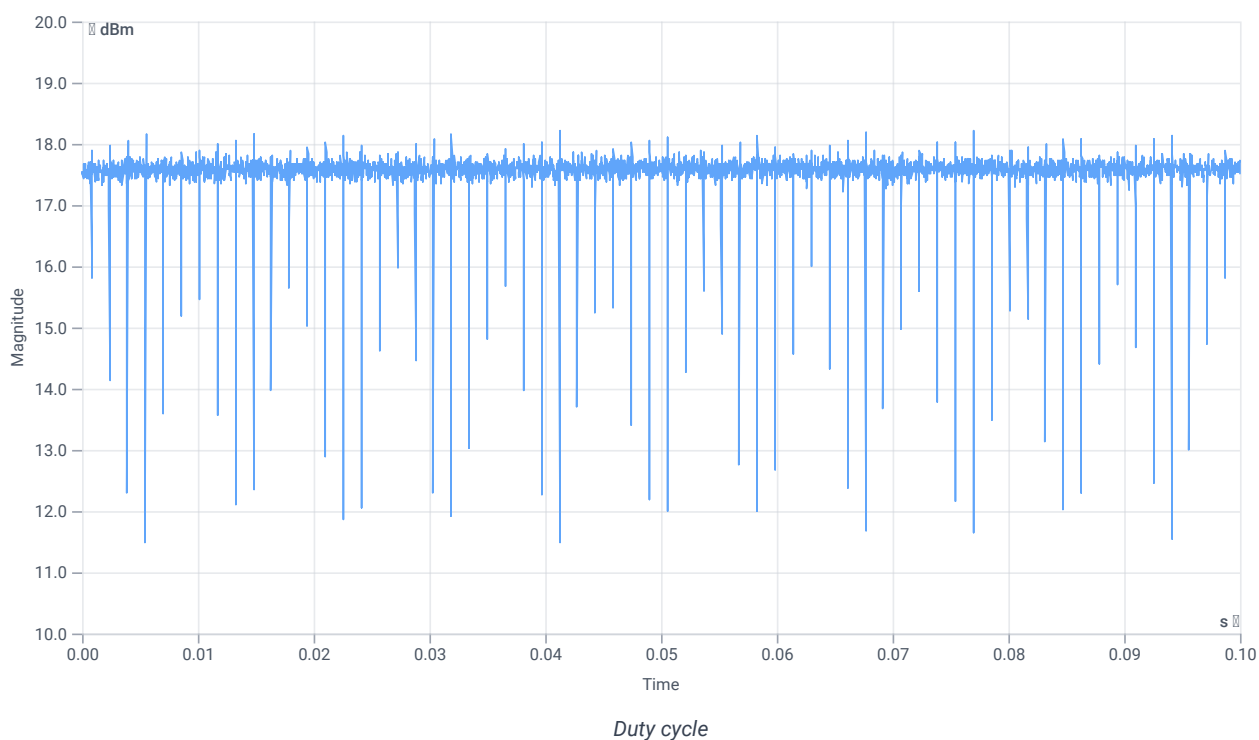

Evaluation Bandwidth

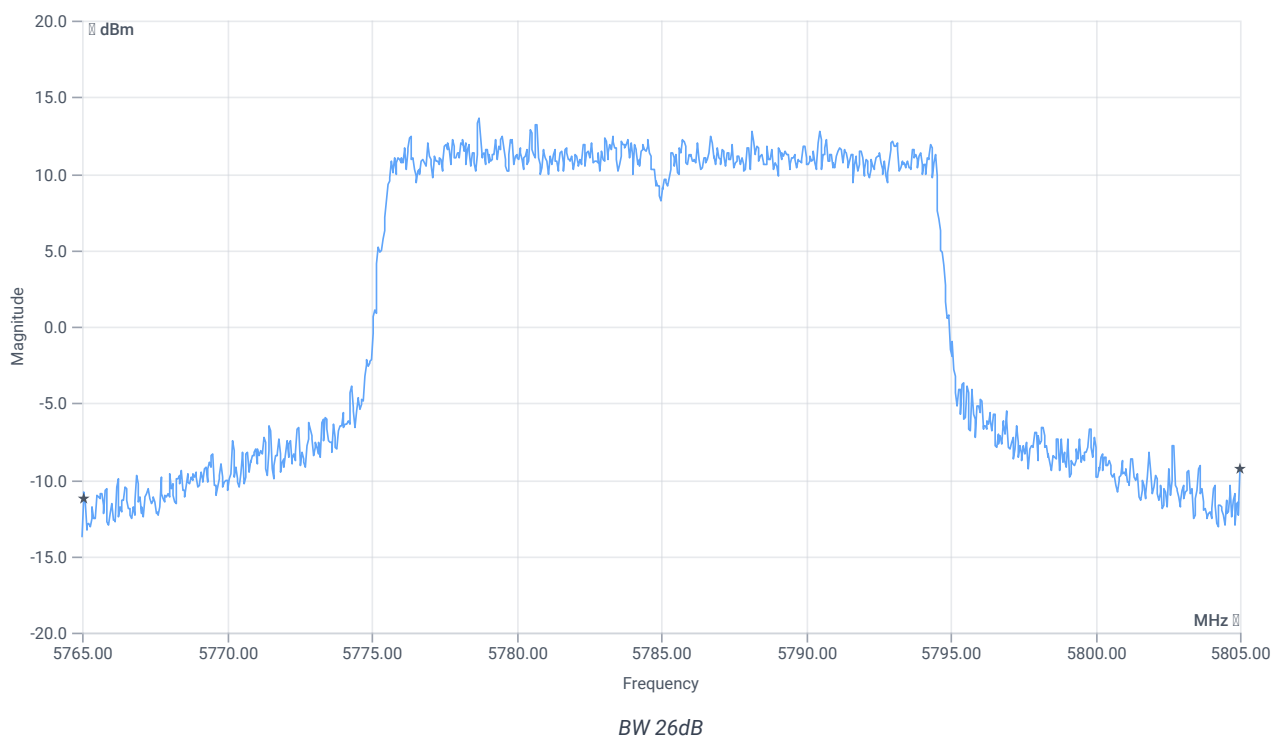


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.96	MHz	INFO
T1 26dB	---	---	5765.0400	MHz	INFO
T2 26dB	---	---	5805.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.78 16.7 30
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

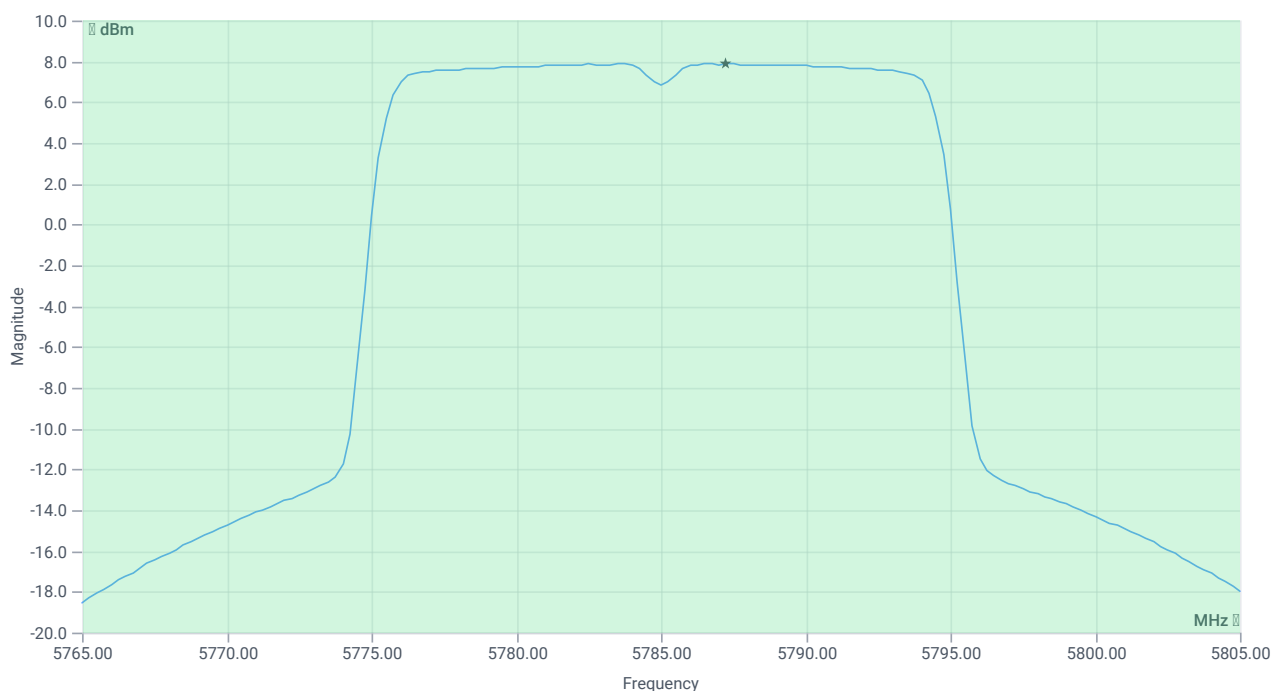

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	20.24	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	20.24	dBm	PASS
Limit: 11 dBm + 10 log 39.96					
Max Output Power DC corrected	---	27.02	20.24	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.78 16.7 30
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

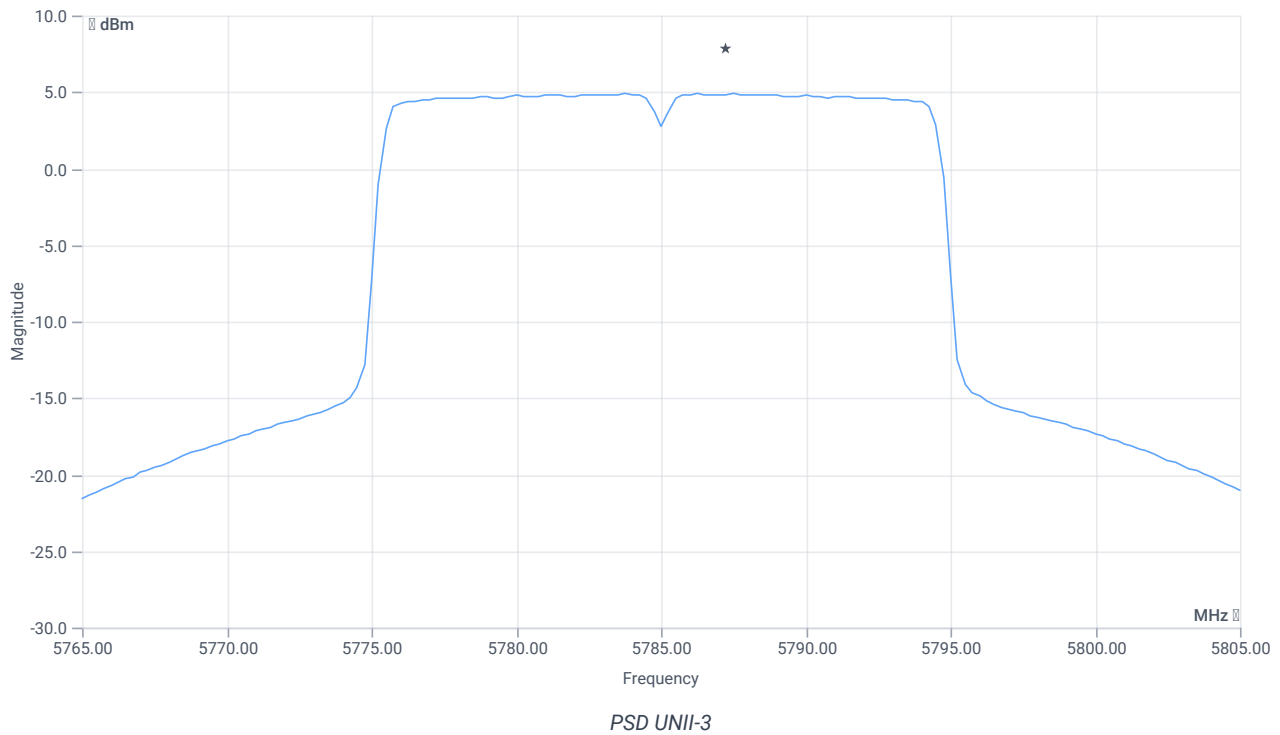

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	4.88	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	4.88	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:35:32
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5785 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.17	dBm	INFO
Ref. Frequency	---	---	5780.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.17 16.7 25
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

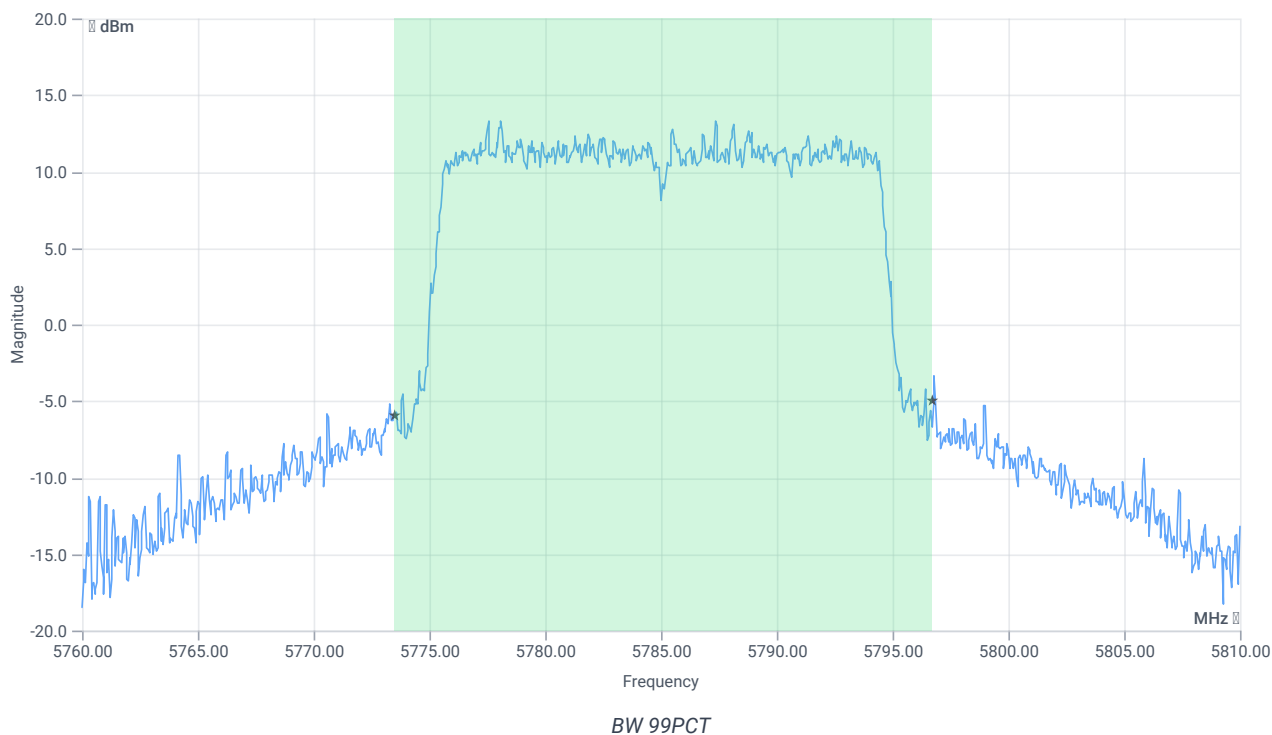




BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	23.227	MHz	INFO
T1 99%	5725.000000	---	5773.5115	MHz	PASS
T2 99%	---	5850.000000	5796.7383	MHz	PASS

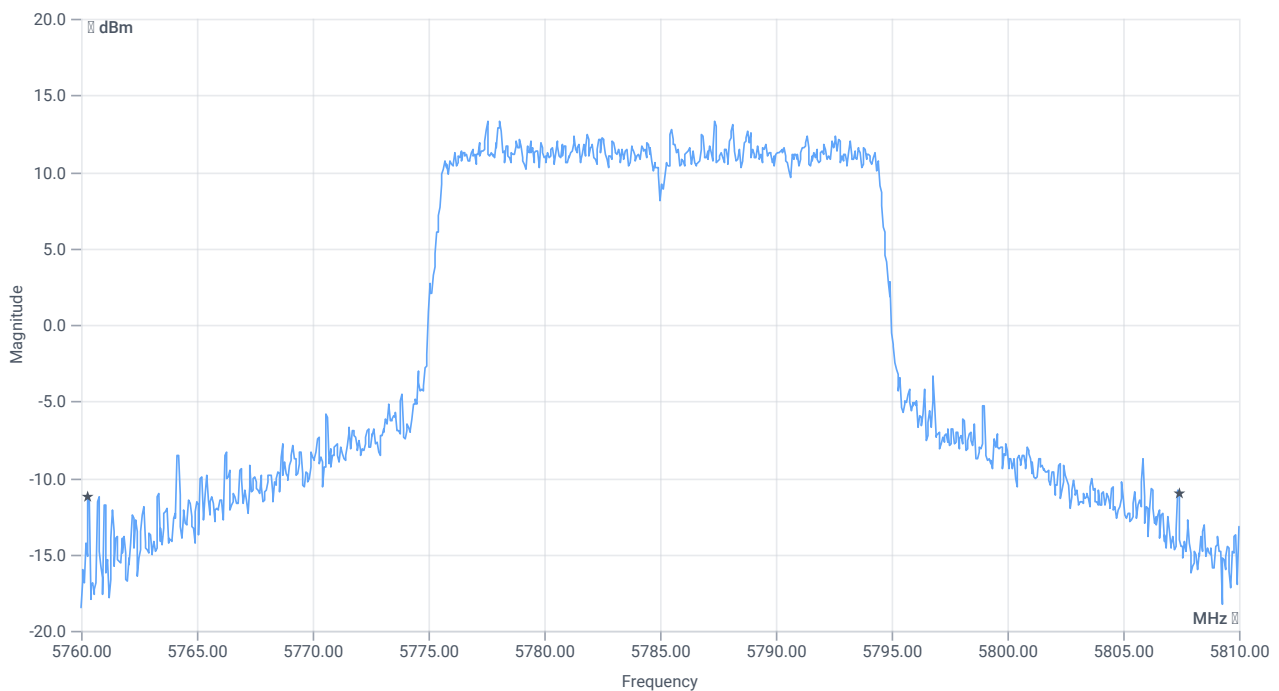

BW 26dB



BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	47.1	MHz	INFO
T1 26dB	5725.000000	---	5760.3000	MHz	PASS
T2 26dB	---	5850.000000	5807.4000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:36:03
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5785 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.59	dBm	INFO
Ref. Frequency	---	---	5779.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.59 16.7 30
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

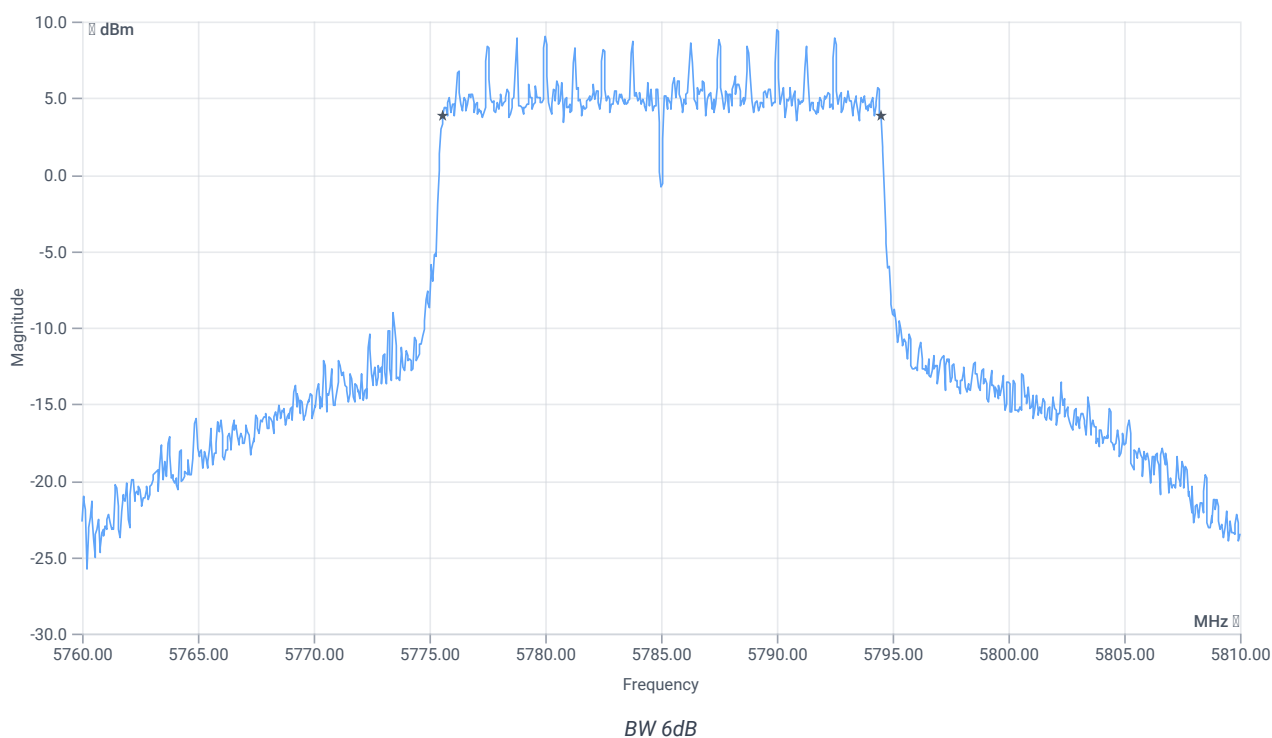

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	---	18.9	MHz	PASS

Verdict

PASS

Message with SA scan ~

References

TC start	11.07.2023 13:36:49
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	-
Method	
Description	Message with SA Scan ax-HE20 U-NII-3
Information	

Test Parameter

Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	11.07.2023 13:36:50
Message	set WLAN5Gx to ax-HE20 U-NII-3, Frequency [MHz] 5825

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Verdict

INFO

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:42:08
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5825 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.09	dBm	INFO
Ref. Frequency	---	---	5826.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

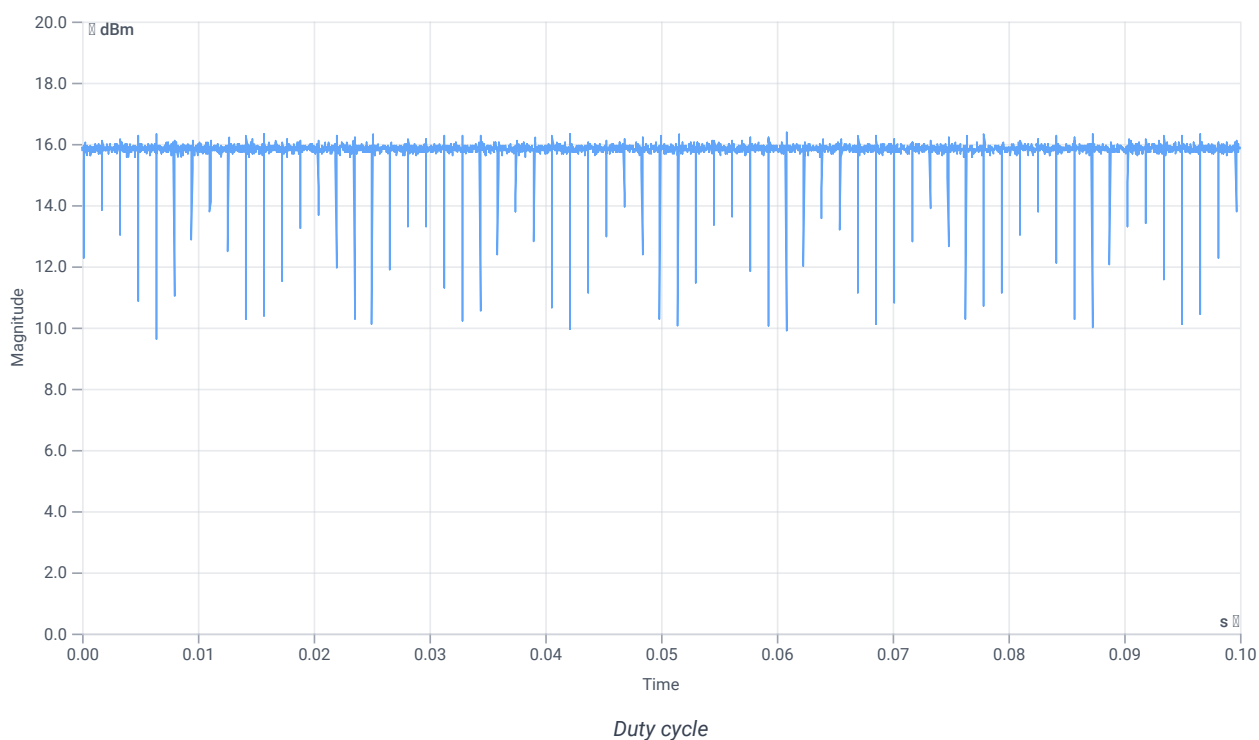

Evaluation Bandwidth

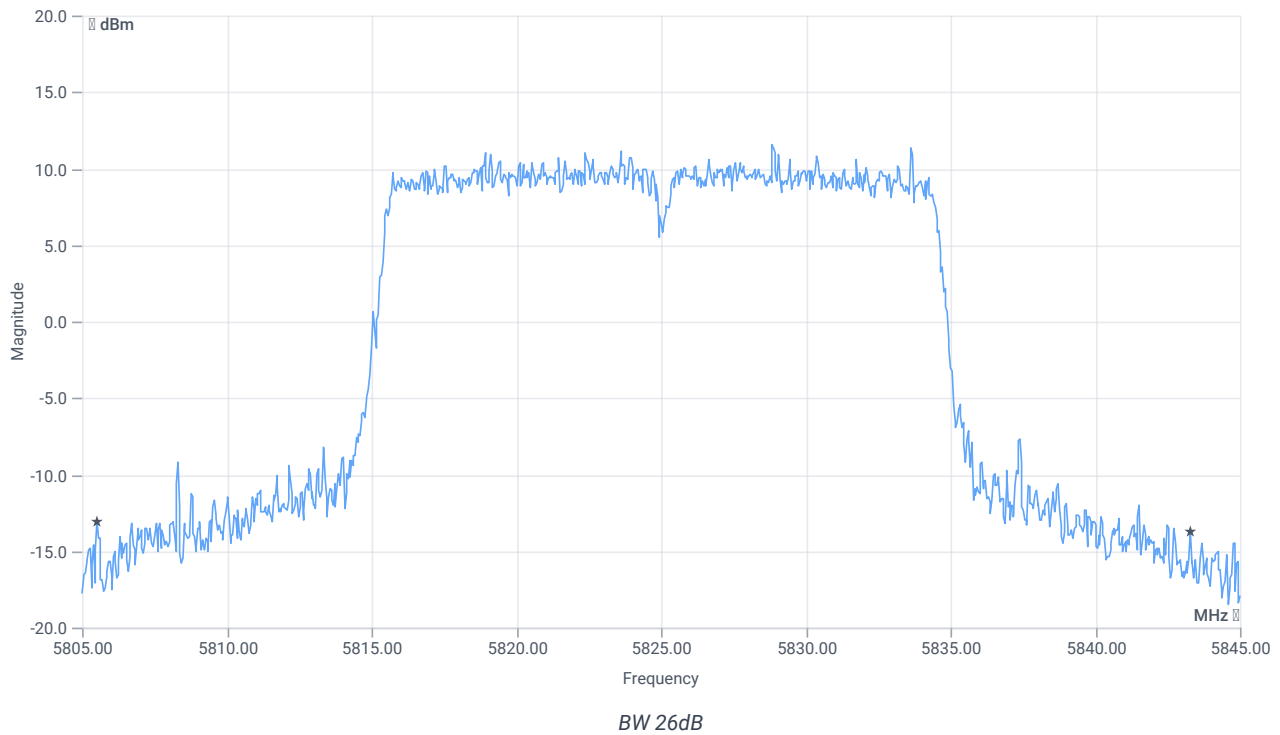


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	37.76	MHz	INFO
T1 26dB	---	---	5805.5200	MHz	INFO
T2 26dB	---	---	5843.2800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.09 16.68 30
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

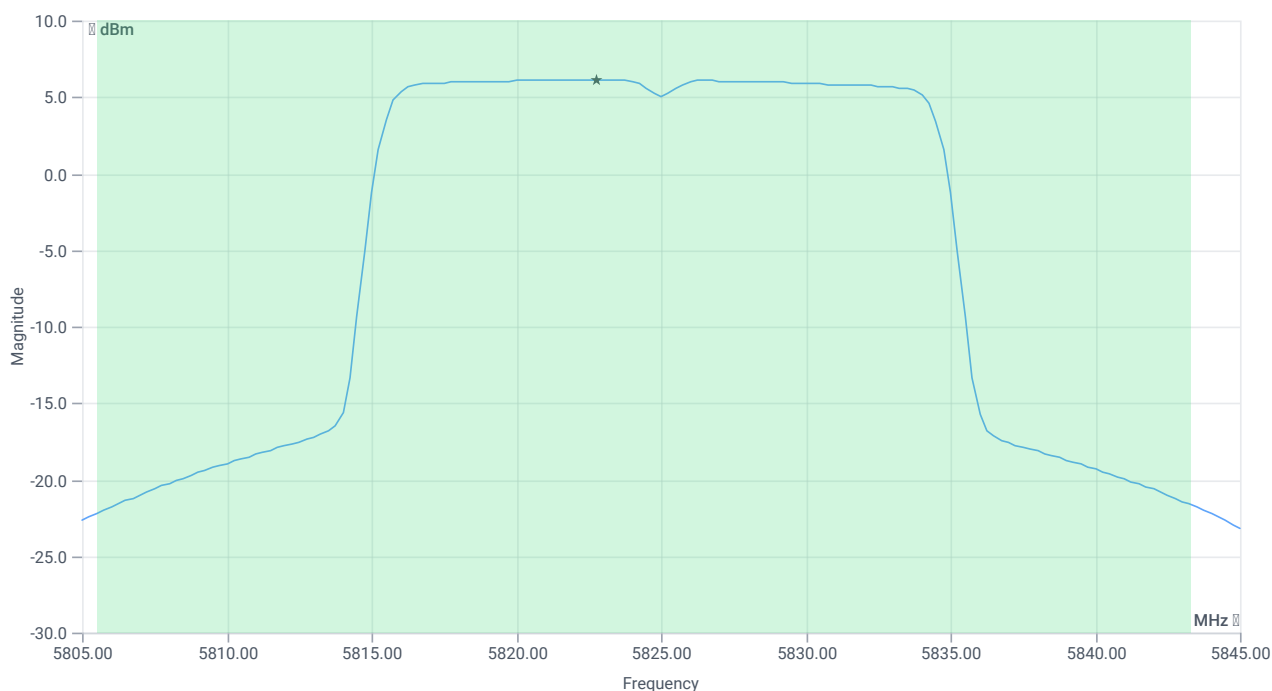

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	18.45	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	18.45	dBm	PASS
Limit: 11 dBm + 10 log 37.76					
Max Output Power DC corrected	---	26.77	18.45	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.09 16.68 30
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

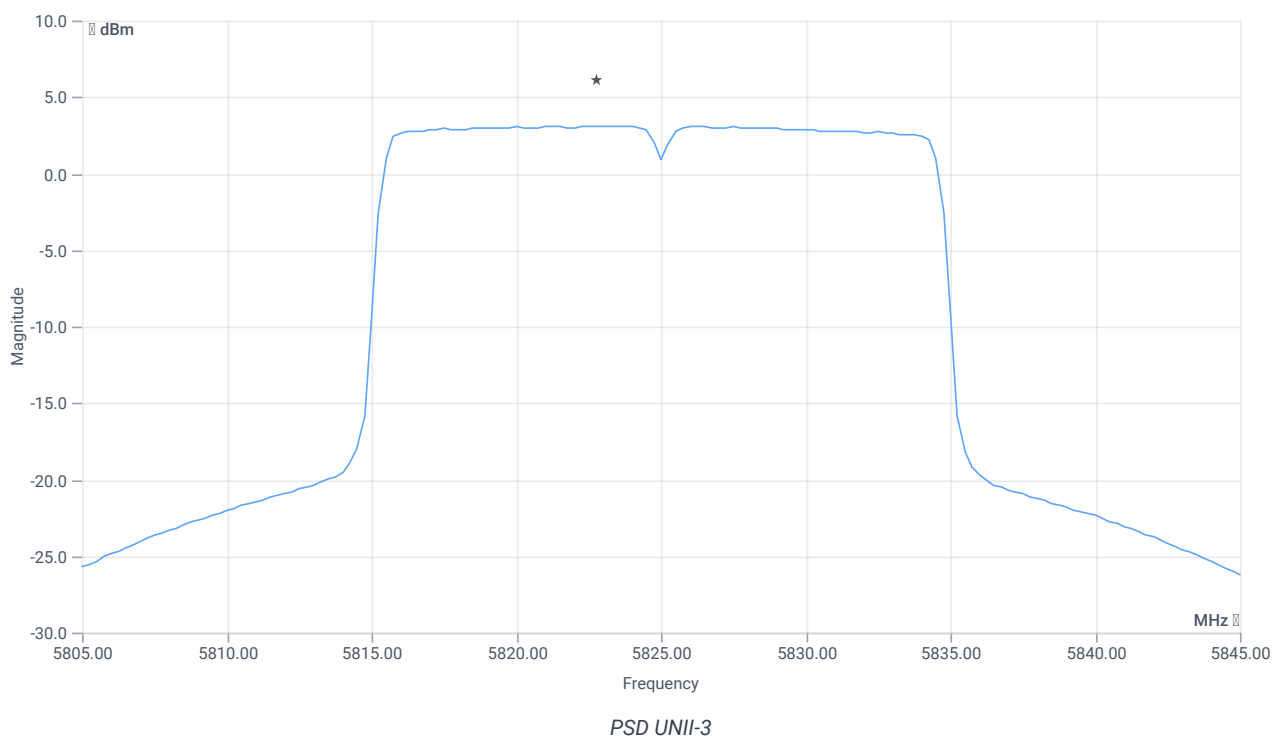

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	3.12	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	3.12	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:44:32
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5825 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.73	dBm	INFO
Ref. Frequency	---	---	5829.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	22.73 16.68 25
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

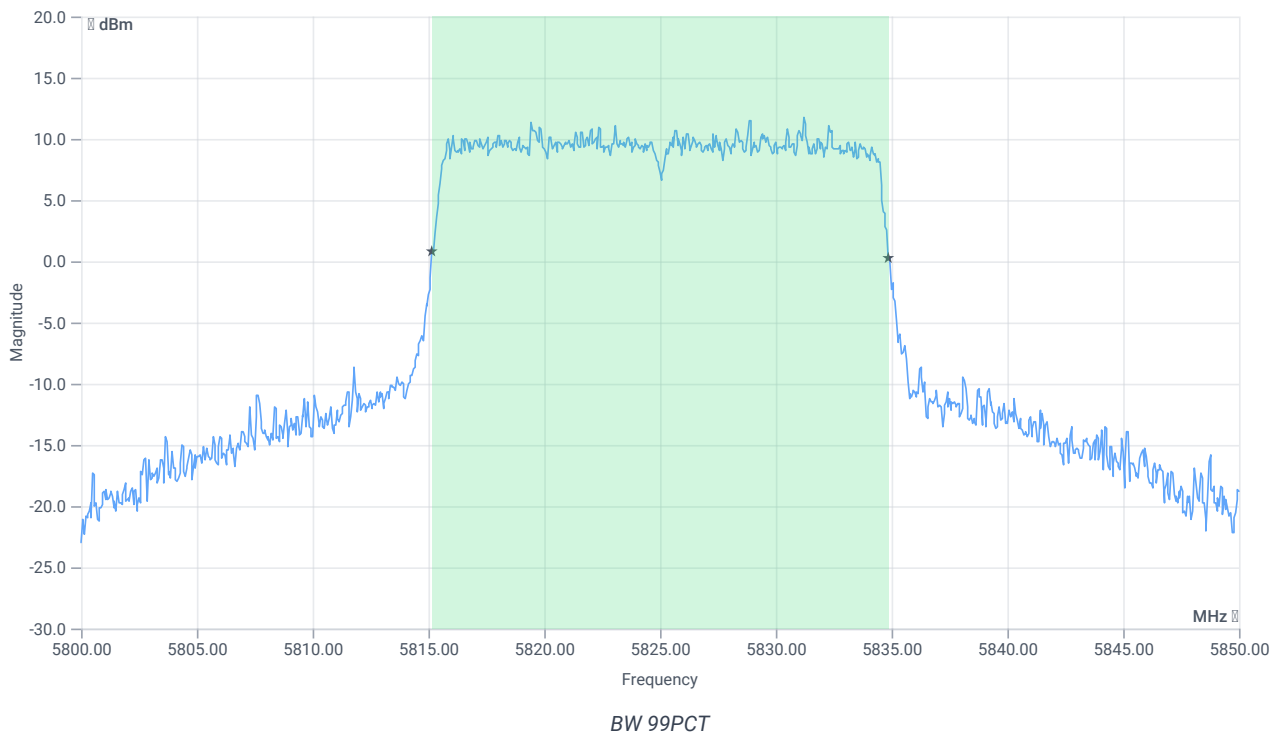





BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	19.730	MHz	INFO
T1 99%	5725.000000	---	5815.1598	MHz	PASS
T2 99%	---	5850.000000	5834.8901	MHz	PASS

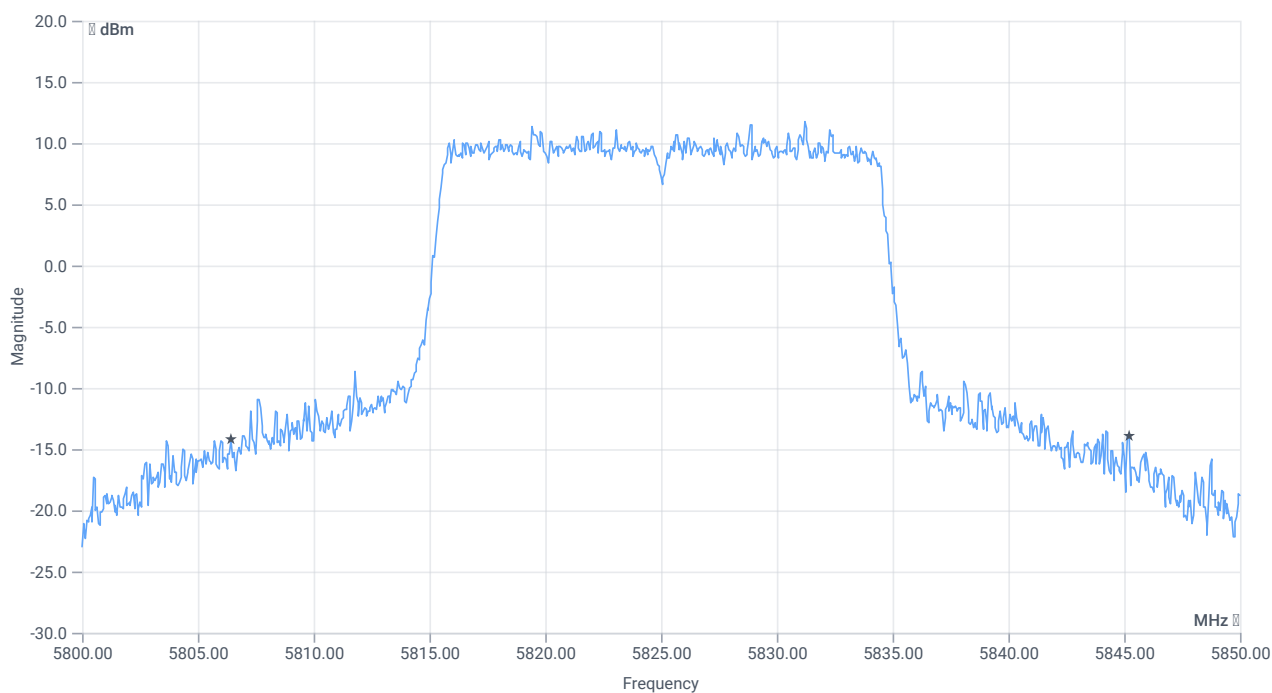

BW 26dB

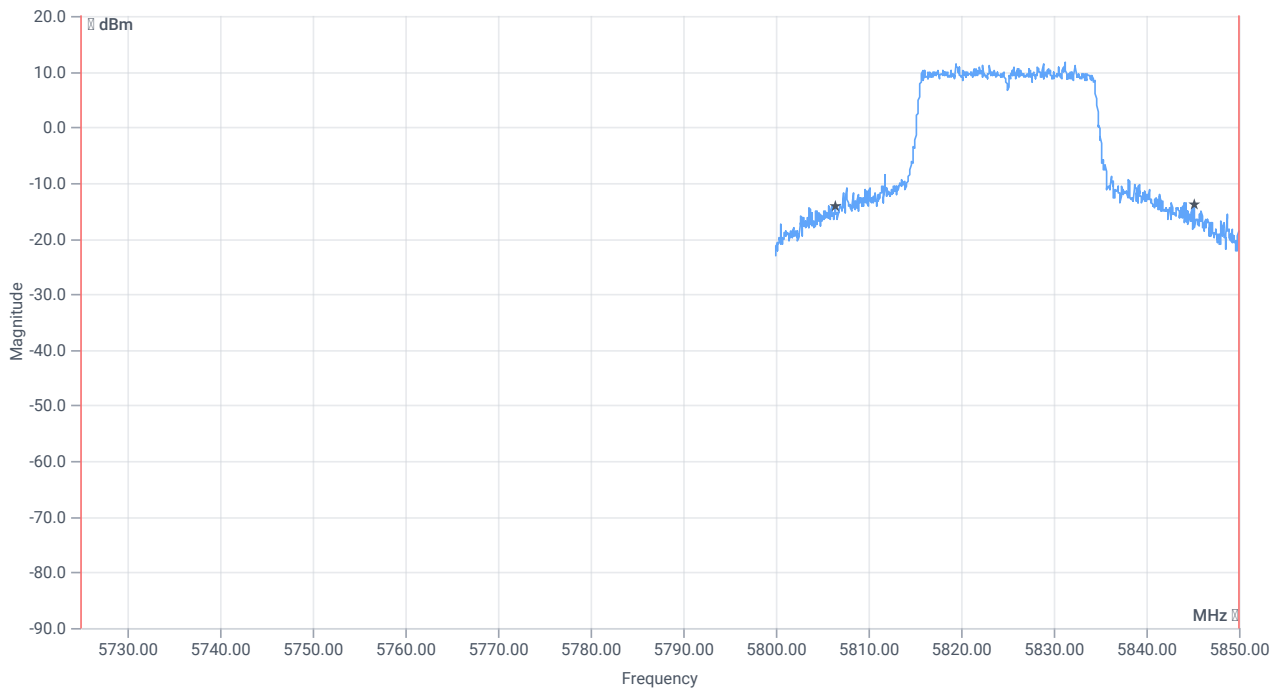

BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	38.75	MHz	INFO
T1 26dB	5725.000000	---	5806.4500	MHz	PASS
T2 26dB	---	5850.000000	5845.2000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:45:09
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5825 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	15.54	dBm	INFO
Ref. Frequency	---	---	5832.190	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	27.54 16.68 30
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

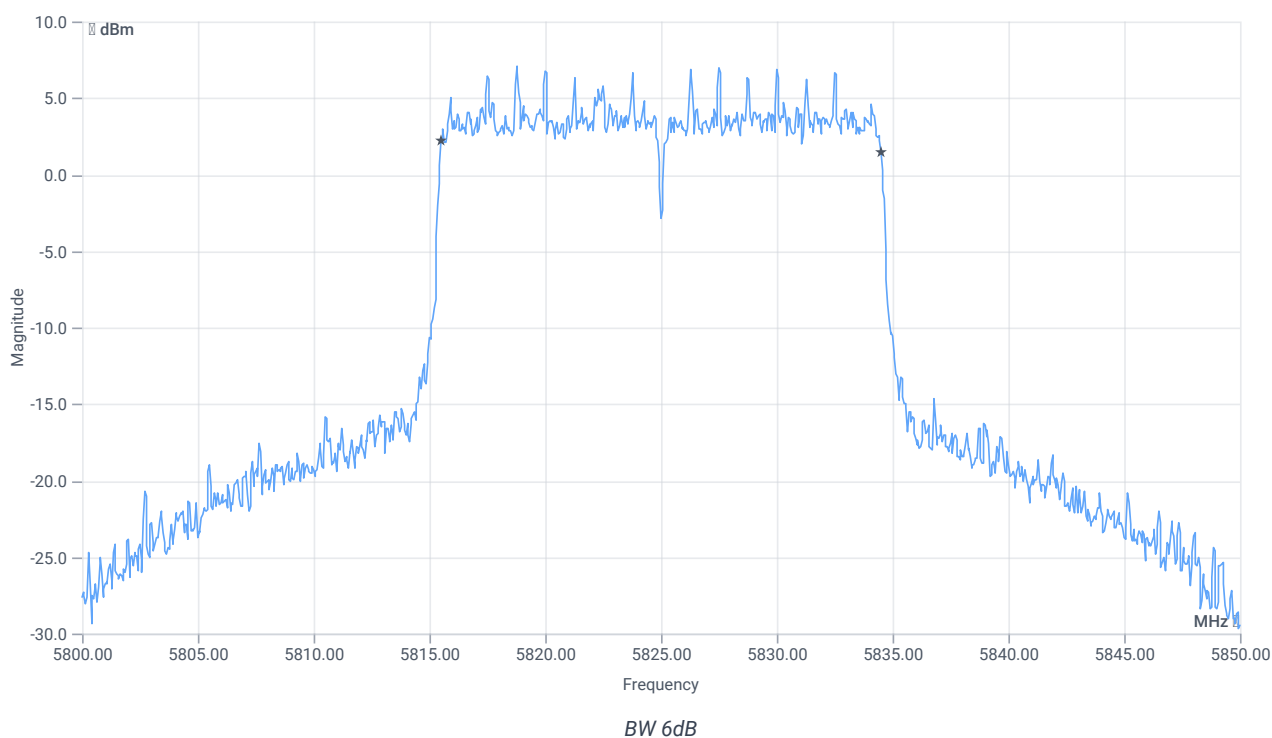

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	---	19	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:45:44
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5825 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.53	dBm	INFO
Ref. Frequency	---	---	5821.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

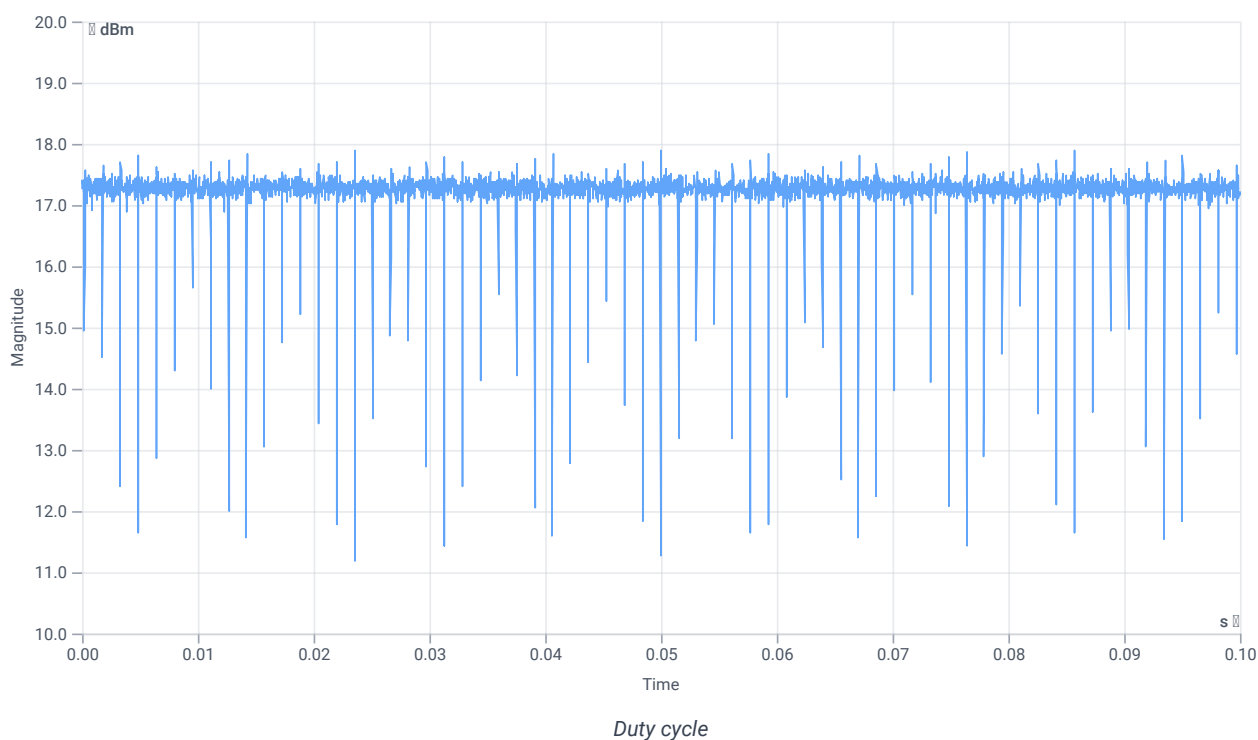

Evaluation Bandwidth

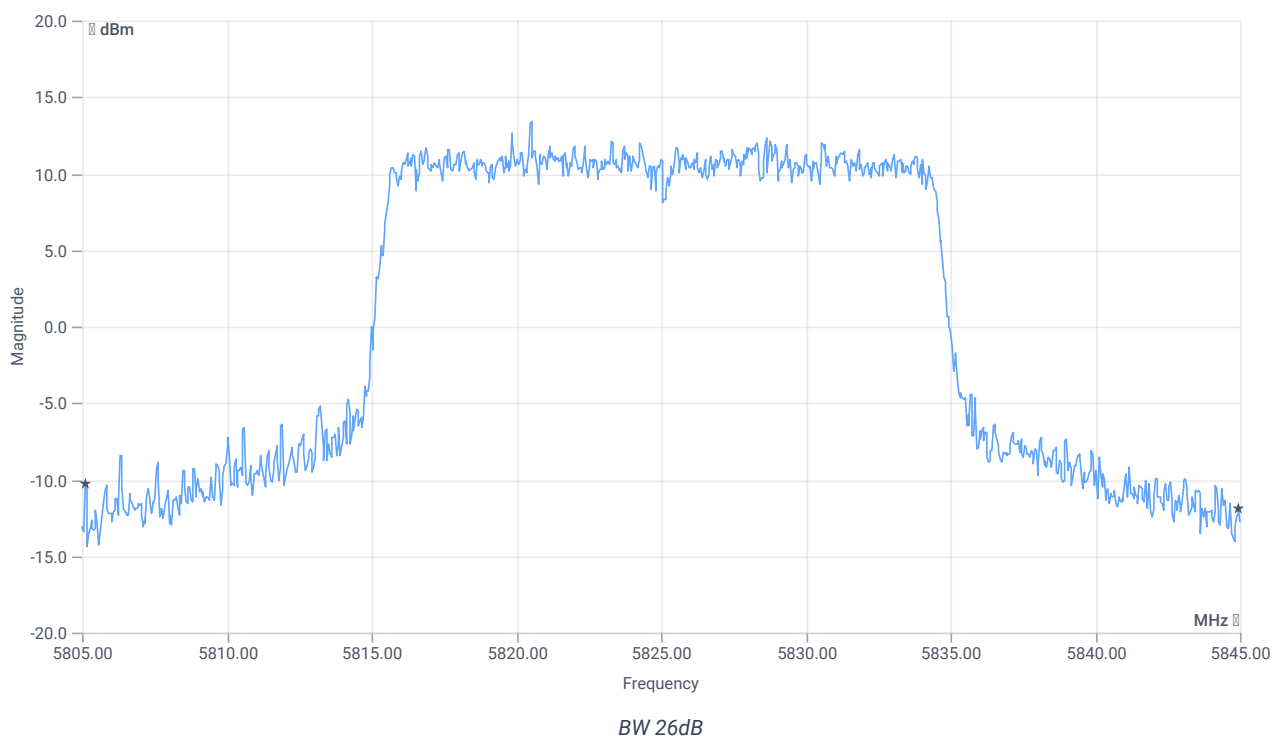


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.84	MHz	INFO
T1 26dB	---	---	5805.1200	MHz	INFO
T2 26dB	---	---	5844.9600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.53 16.68 30
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

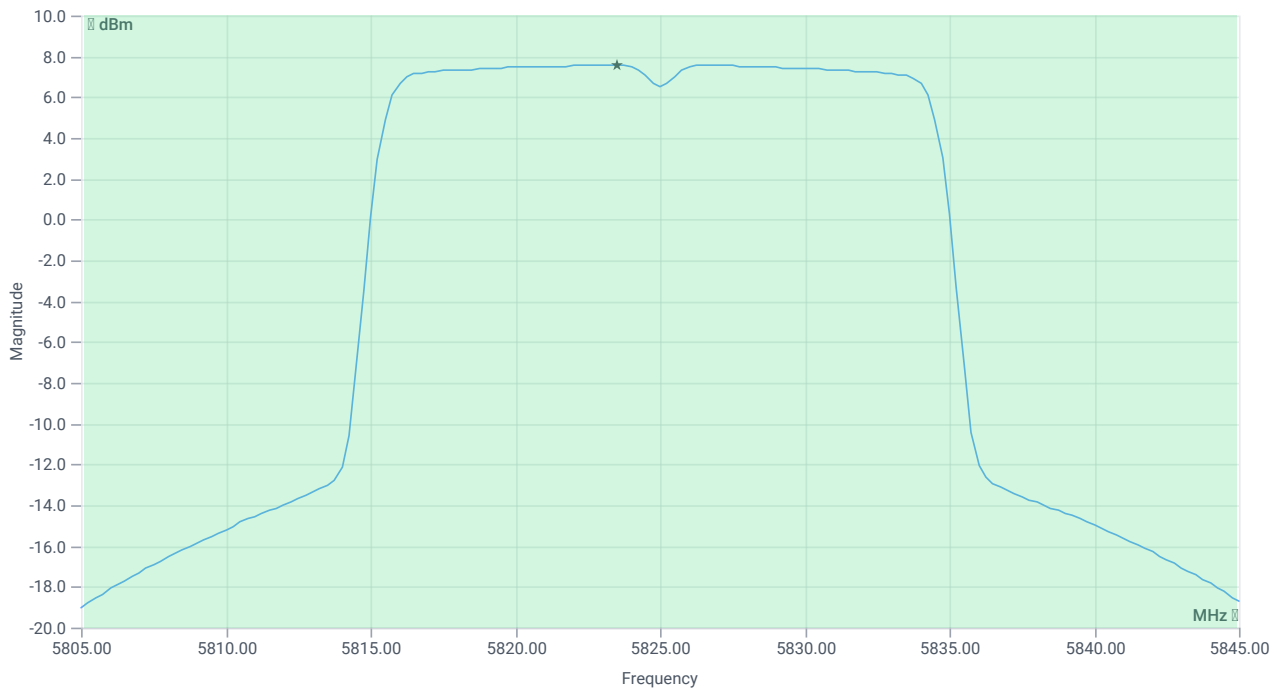

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	---	---	19.91	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	19.91	dBm	PASS
Limit: 11 dBm + 10 log 39.84					
Max Output Power DC corrected	---	27	19.91	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.53 16.68 30
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

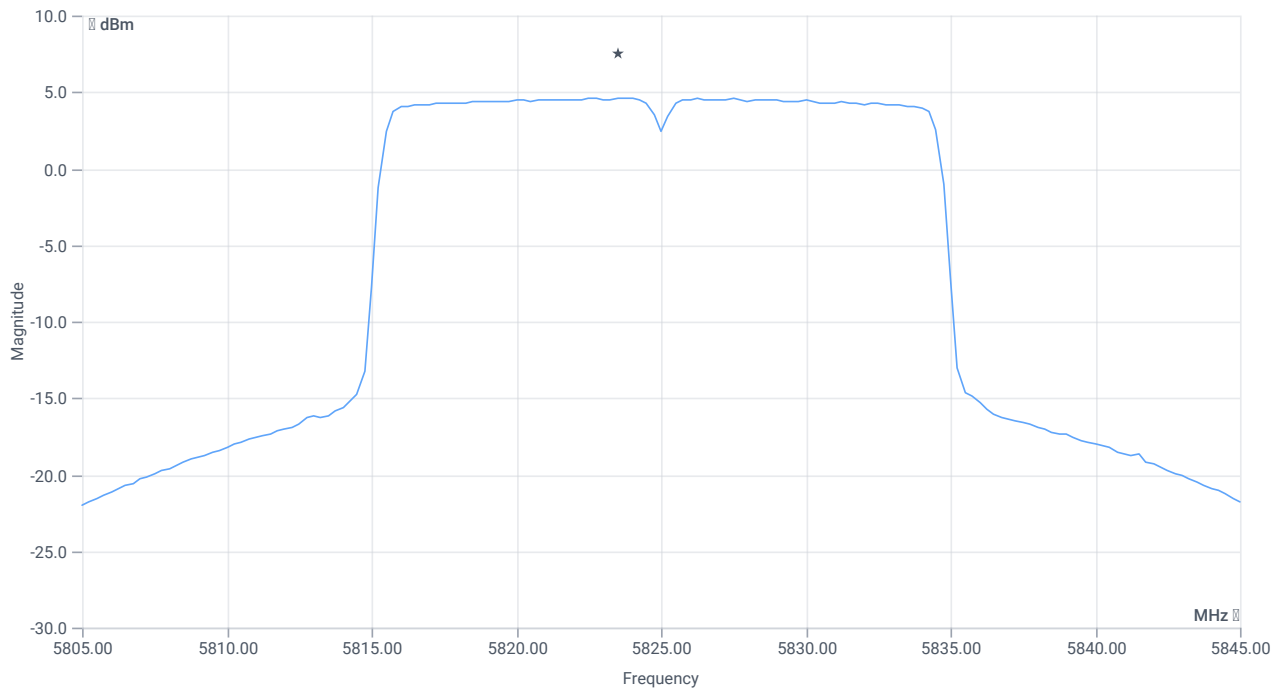

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	---	---	4.6	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	4.6	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:48:08
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5825 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	16.32	dBm	INFO
Ref. Frequency	---	---	5827.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.32 16.68 25
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

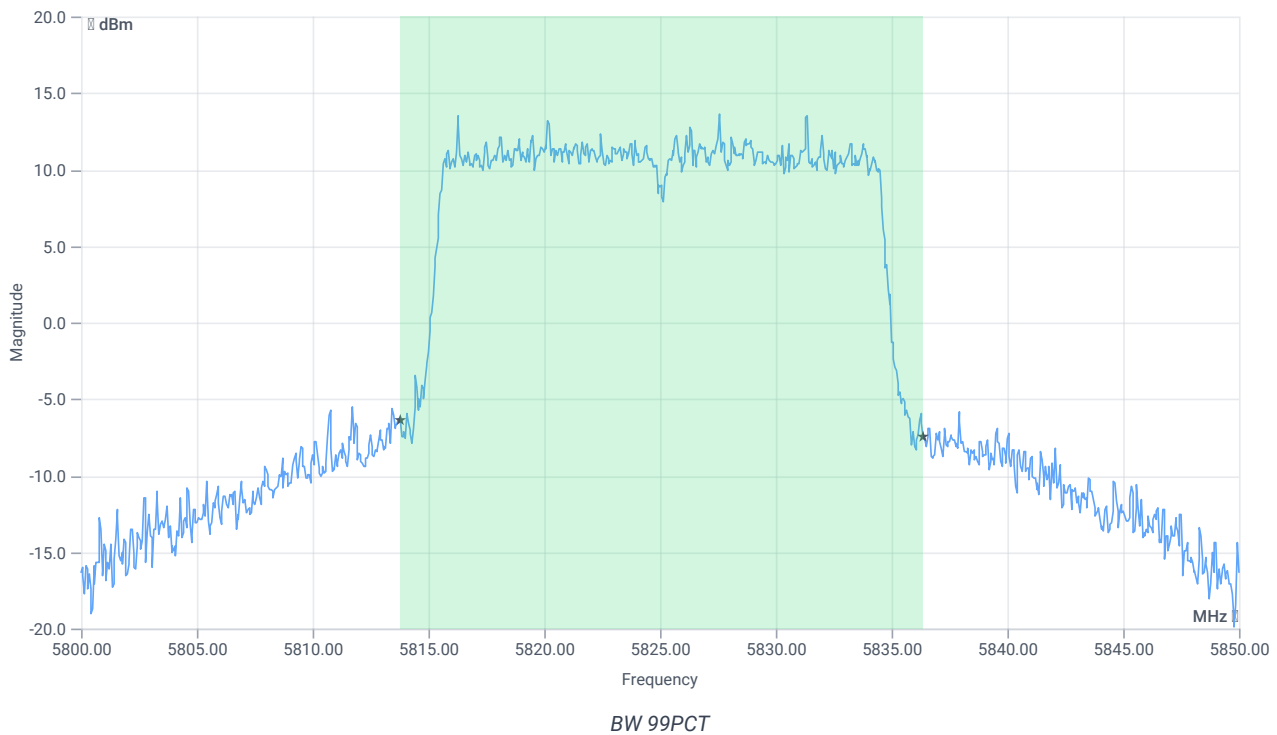


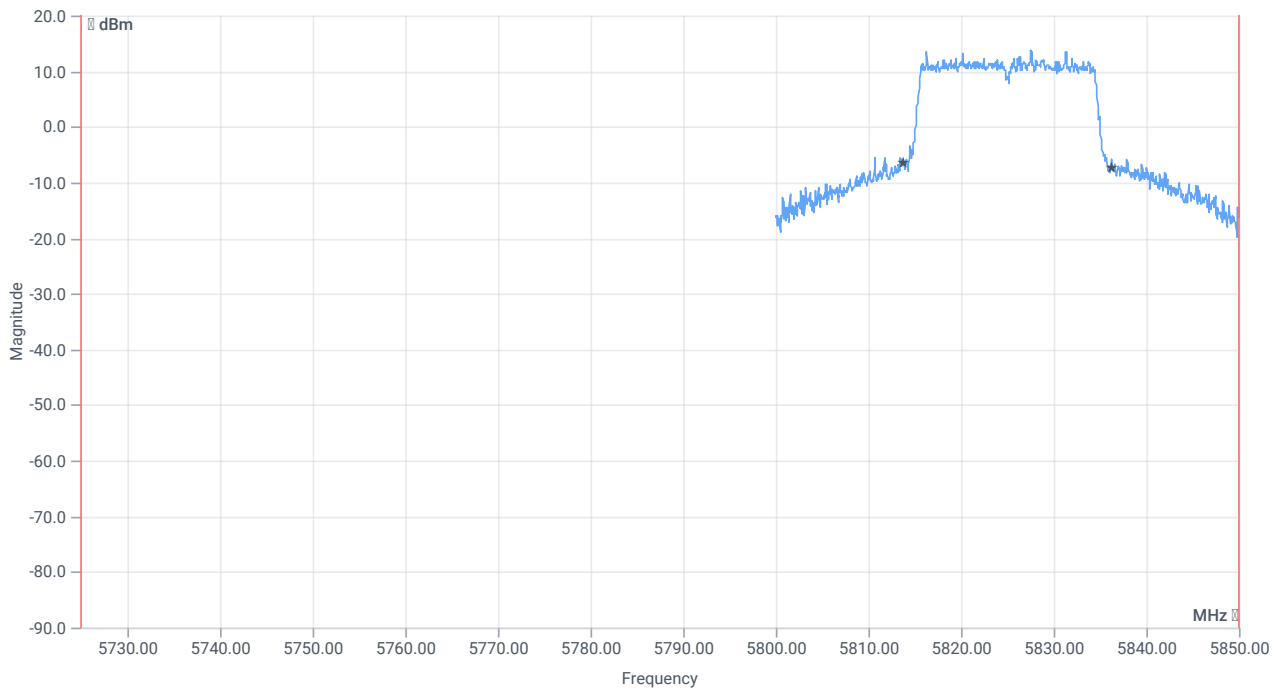

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	22.527	MHz	INFO
T1 99%	5725.000000	---	5813.8112	MHz	PASS
T2 99%	---	5850.000000	5836.3387	MHz	PASS

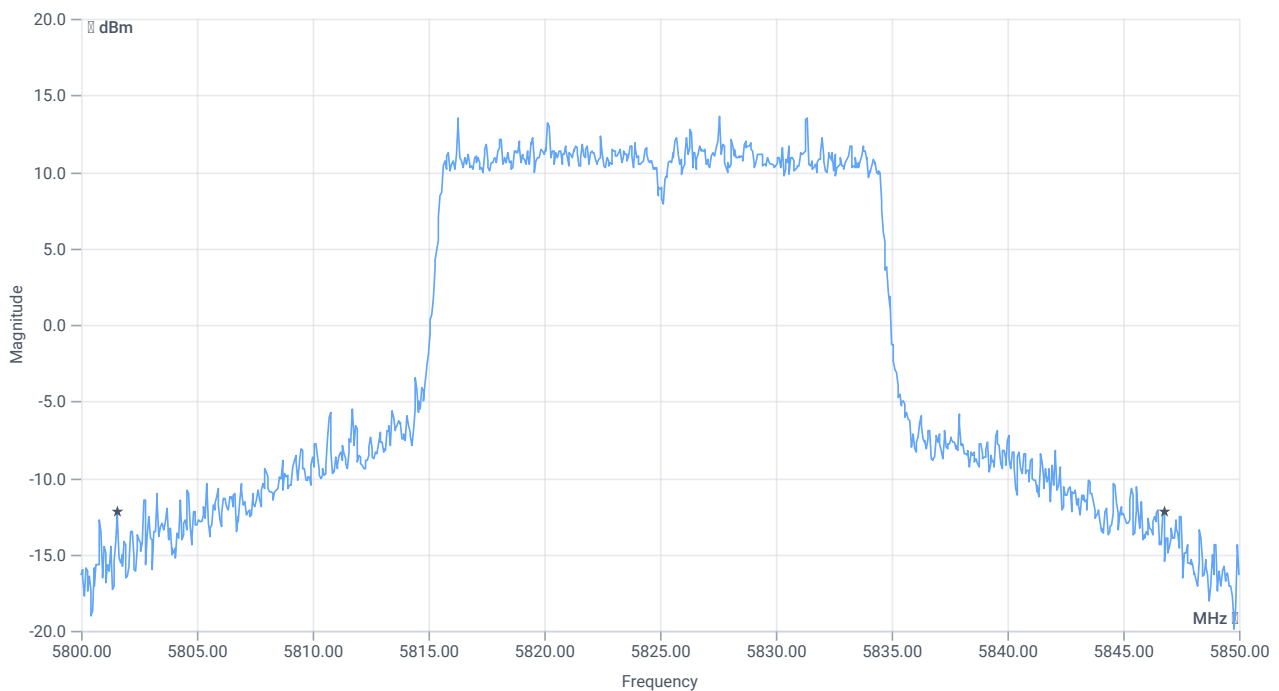

BW 26dB



BW within Band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	45.2	MHz	INFO
T1 26dB	5725.000000	---	5801.5500	MHz	PASS
T2 26dB	---	5850.000000	5846.7500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:48:45
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407, ISED RSS247 -
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5825 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	17.35	dBm	INFO
Ref. Frequency	---	---	5828.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.35 16.68 30
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

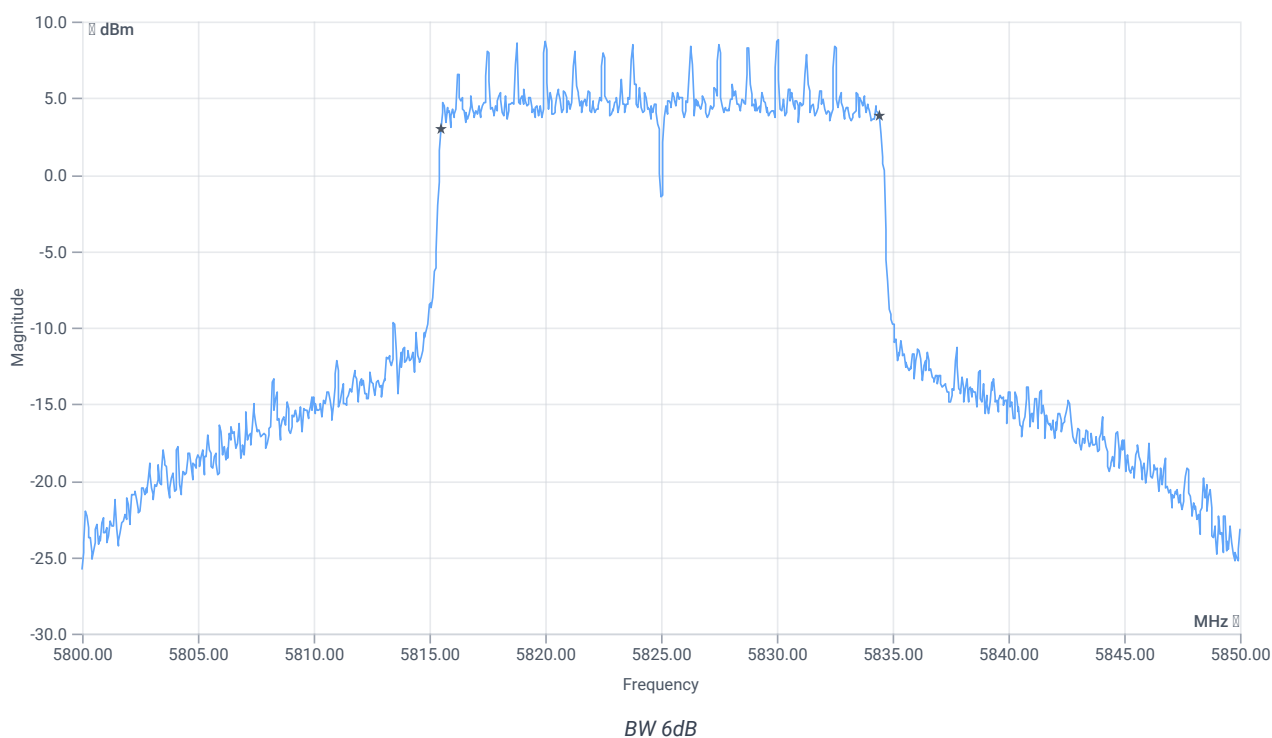

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	---	18.95	MHz	PASS

Verdict

PASS

FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-1

References

TC start	20.07.2023 09:37:02
Ambit temp [°C] humidity [rel%]	23.2 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	
Description	MIMO Σ FCC Power & psd - WLAN5Gx ax-HE20 U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	several
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	None

Equipment

Test at TX 5180 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	16.78	dBm	INFO
Ant:1 BW 26dB	---	---	22.080	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	16.22	dBm	INFO
Ant:2 BW 26dB	---	---	21.720	MHz	INFO
Σ Limit absolute	---	24	19.52	dBm	PASS
Σ Limit: 11 dBm + 10 log 21.72	---	24.37	19.52	dBm	na

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	4.43	dBm/1MHz	INFO
Ant:2 PSD	---	---	3.86	dBm/1MHz	INFO
Σ	---	11	7.16	dBm/1MHz	PASS

Test at TX 5200 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	20.1	dBm	INFO
Ant:1 BW 26dB	---	---	39.720	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	20.06	dBm	INFO
Ant:2 BW 26dB	---	---	39.280	MHz	INFO
Σ Limit absolute	---	24	23.09	dBm	PASS
Σ Limit: 11 dBm + 10 log 39.28	---	26.94	23.09	dBm	na

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	7.74	dBm/1MHz	INFO
Ant:2 PSD	---	---	7.67	dBm/1MHz	INFO
Σ	---	11	10.72	dBm/1MHz	PASS

Test at TX 5240 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	18.82	dBm	INFO
Ant:1 BW 26dB	---	---	37.280	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	18.44	dBm	INFO
Ant:2 BW 26dB	---	---	35.960	MHz	INFO
Σ Limit absolute	---	24	21.64	dBm	PASS
Σ Limit: 11 dBm + 10 log 35.96	---	26.56	21.64	dBm	na

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	6.5	dBm/1MHz	INFO
Ant:2 PSD	---	---	6.06	dBm/1MHz	INFO
Σ	---	11	9.3	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2A

References

TC start	11.07.2023 14:45:07
Ambit temp [°C] humidity [rel%]	27.0 49
System version	4.6.0.0
Specification	FCC 15.407 -
Method	
Description	MIMO Σ FCC Power & psd - WLAN5Gx ax-HE20 U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	several
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	None

Equipment

Test at TX 5260 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	19.25	dBm	INFO
Ant:1 BW 26dB	---	---	40.000	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	19.98	dBm	INFO
Ant:2 BW 26dB	---	---	39.880	MHz	INFO
Σ Limit absolute	---	24	22.64	dBm	PASS
Σ Limit: 11 dBm + 10 log 39.88	---	27.01	22.64	dBm	PASS

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	6.81	dBm/1MHz	INFO
Ant:2 PSD	---	---	7.58	dBm/1MHz	INFO
Σ	---	11	10.22	dBm/1MHz	PASS

Test at TX 5280 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	19.17	dBm	INFO
Ant:1 BW 26dB	---	---	39.720	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	19.65	dBm	INFO
Ant:2 BW 26dB	---	---	39.040	MHz	INFO
Σ Limit absolute	---	24	22.43	dBm	PASS
Σ Limit: 11 dBm + 10 log 39.04	---	26.92	22.43	dBm	PASS

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	6.79	dBm/1MHz	INFO
Ant:2 PSD	---	---	7.28	dBm/1MHz	INFO
Σ	---	11	10.05	dBm/1MHz	PASS

Test at TX 5320 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	16.88	dBm	INFO
Ant:1 BW 26dB	---	---	27.400	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	17.71	dBm	INFO
Ant:2 BW 26dB	---	---	26.080	MHz	INFO
Σ Limit absolute	---	24	20.33	dBm	PASS
Σ Limit: 11 dBm + 10 log 26.08	---	25.16	20.33	dBm	PASS

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	4.52	dBm/1MHz	INFO
Ant:2 PSD	---	---	5.35	dBm/1MHz	INFO
Σ	---	11	7.97	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-2C

References

TC start	11.07.2023 13:57:21
Ambit temp [°C] humidity [rel%]	26.9 48
System version	4.6.0.0
Specification	FCC 15.407 -
Method	
Description	MIMO Σ FCC Power & psd - WLAN5Gx ax-HE20 U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	several
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	None

Equipment

Test at TX 5500 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	18.15	dBm	INFO
Ant:1 BW 26dB	---	---	28.120	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	19.2	dBm	INFO
Ant:2 BW 26dB	---	---	33.520	MHz	INFO
Σ Limit absolute	---	24	21.72	dBm	PASS
Σ Limit: 11 dBm + 10 log 28.12	---	25.49	21.72	dBm	PASS

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	5.78	dBm/1MHz	INFO
Ant:2 PSD	---	---	6.84	dBm/1MHz	INFO
Σ	---	11	9.35	dBm/1MHz	PASS

Test at TX 5600 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	18.96	dBm	INFO
Ant:1 BW 26dB	---	---	38.880	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	20.07	dBm	INFO
Ant:2 BW 26dB	---	---	39.160	MHz	INFO
Σ Limit absolute	---	24	22.56	dBm	PASS
Σ Limit: 11 dBm + 10 log 38.88	---	26.9	22.56	dBm	PASS

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	6.59	dBm/1MHz	INFO
Ant:2 PSD	---	---	7.69	dBm/1MHz	INFO
Σ	---	11	10.19	dBm/1MHz	PASS

Test at TX 5700 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	18.33	dBm	INFO
Ant:1 BW 26dB	---	---	37.640	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	19.96	dBm	INFO
Ant:2 BW 26dB	---	---	38.080	MHz	INFO
Σ Limit absolute	---	24	22.23	dBm	PASS
Σ Limit: 11 dBm + 10 log 37.64	---	26.76	22.23	dBm	PASS

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	5.96	dBm/1MHz	INFO
Ant:2 PSD	---	---	7.58	dBm/1MHz	INFO
Σ	---	11	9.86	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # MIMO Σ Max output power and psd ~ WLAN5Gx ax-HE20 U-NII-3

References

TC start	11.07.2023 13:57:57
Ambit temp [°C] humidity [rel%]	26.9 49
System version	4.6.0.0
Specification	FCC 15.407 -
Method	
Description	MIMO Σ FCC Power & psd - WLAN5Gx ax-HE20 U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE20
Antenna port used	several
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.3
Switched path	None

Equipment

Test at TX 5745 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	19.02	dBm	INFO
Ant:1 BW 26dB	---	---	39.320	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	20.62	dBm	INFO
Ant:2 BW 26dB	---	---	40.000	MHz	INFO
Σ Limit absolute	---	30	22.9	dBm	PASS
Σ Limit: 11 dBm + 10 log 39.32	---	26.95	22.9	dBm	na

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	3.69	dBm/0.5MHz	INFO
Ant:2 PSD	---	---	5.37	dBm/0.5MHz	INFO
Σ	---	30	7.62	dBm/0.5MHz	PASS

Test at TX 5785 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	19.08	dBm	INFO
Ant:1 BW 26dB	---	---	38.840	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	20.24	dBm	INFO
Ant:2 BW 26dB	---	---	39.960	MHz	INFO
Σ Limit absolute	---	30	22.71	dBm	PASS
Σ Limit: 11 dBm + 10 log 38.84	---	26.89	22.71	dBm	na

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	3.87	dBm/0.5MHz	INFO
Ant:2 PSD	---	---	4.88	dBm/0.5MHz	INFO
Σ	---	30	7.41	dBm/0.5MHz	PASS

Test at TX 5825 MHz

RESULT Power

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 Max Output Power DC corrected	---	---	18.45	dBm	INFO
Ant:1 BW 26dB	---	---	37.760	MHz	INFO
Ant:2 Max Output Power DC corrected	---	---	19.91	dBm	INFO
Ant:2 BW 26dB	---	---	39.840	MHz	INFO
Σ Limit absolute	---	30	22.25	dBm	PASS
Σ Limit: 11 dBm + 10 log 37.76	---	26.77	22.25	dBm	na

RESULT PSD

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ant:1 PSD	---	---	3.12	dBm/0.5MHz	INFO
Ant:2 PSD	---	---	4.6	dBm/0.5MHz	INFO
Σ	---	30	6.93	dBm/0.5MHz	PASS

Verdict

PASS

- END OF DOCUMENT -