

Conducted test results

No.1-2255-26-01-05_TR1-A201-R01

February 09, 2026

Test Standard(s) FCC, ISED - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.



cn=Michael Dorongovski,
o=cetecom advanced GmbH,
ou=DOR-230601,
email=michael.dorongovski@c
etecomadvanced.com, c=DE
2026.02.09 14:00:45 +01'00'

Authorized

Michael Dorongovski

Lab Manager
Radio Labs

Table of Content

FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30	3
FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30	6
FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30	9
FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30	12
FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30	15
FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30	18
FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30	21
FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30	24
FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30	27
FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30	30
FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30	33
FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30	36

FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30

References

TC start	05.02.2026 12:07:05
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_B
Information	Burst Mode - ANT 2

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter


Technology to test	NR
Band	Band_77_B
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False
Frequency mid to test	False
Frequency high to test	True
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at BW [MHz]: 20


Test freq: high, UL[MHz]/CH 3969.99/664666, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.28 12.49 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE

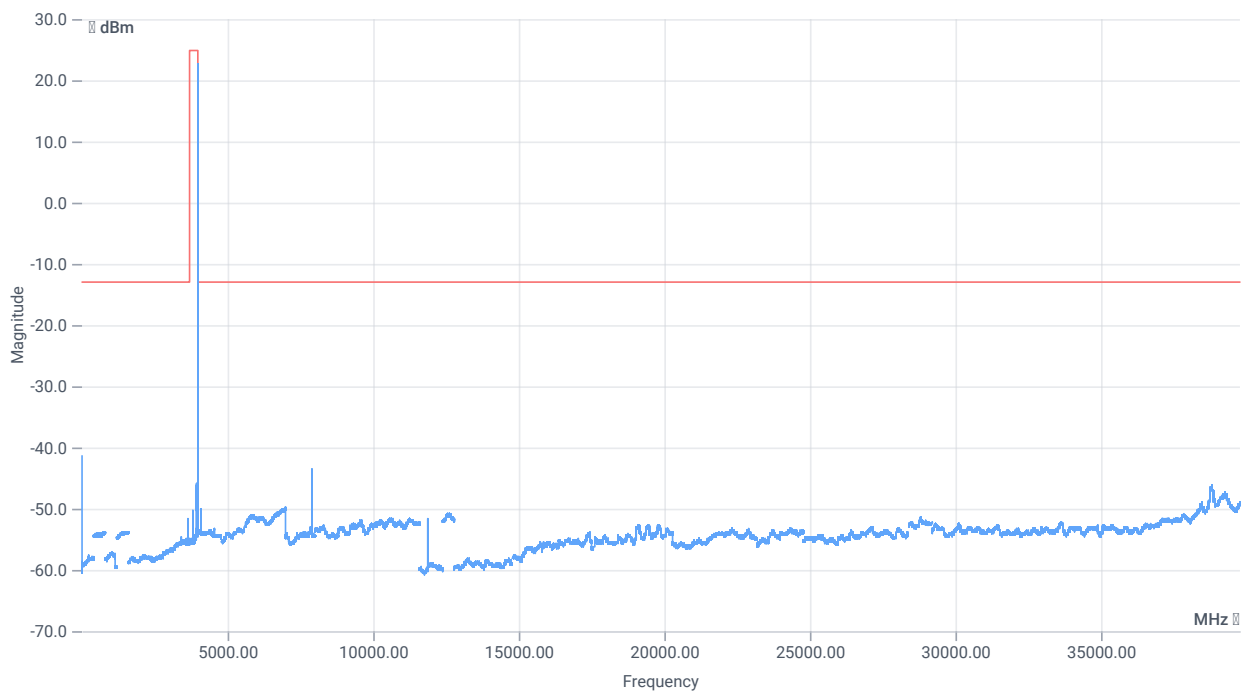

TX emissions

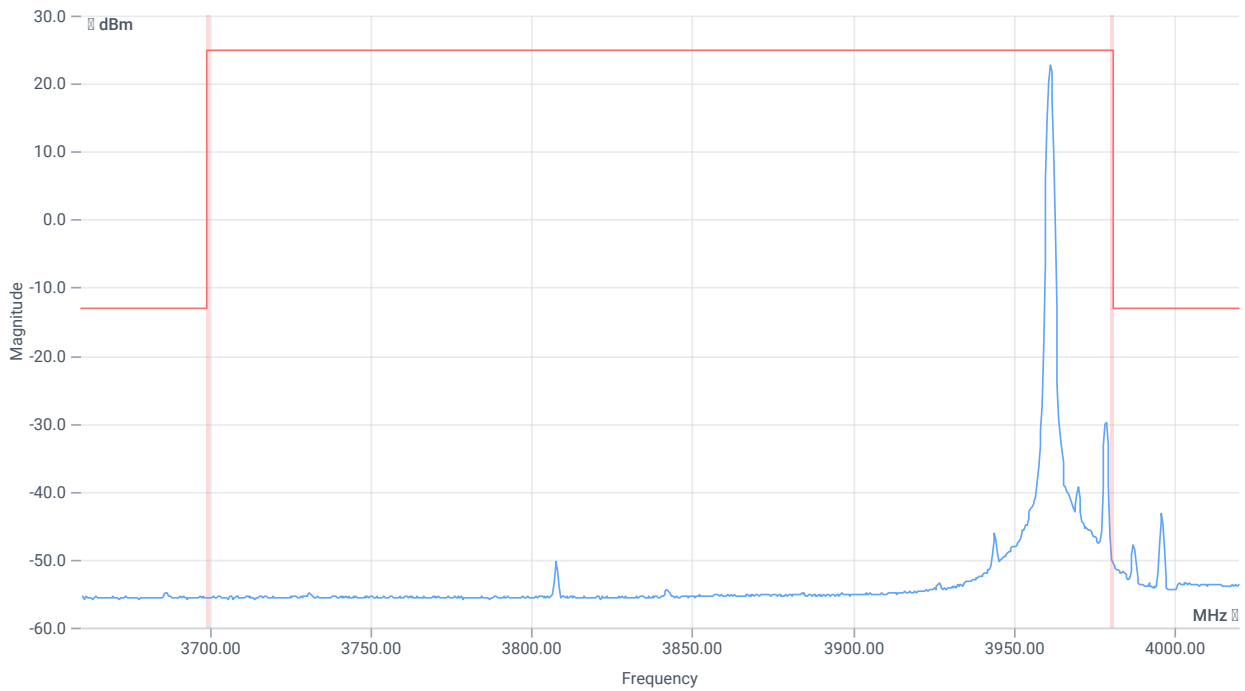

TX emissions band zoomed

RESULT Test freq: high, UL[MHz]/CH 3969.99/664666, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30

References

TC start	05.02.2026 12:00:38
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_B
Information	Burst Mode - ANT 2

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter


Technology to test	NR
Band	Band_77_B
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False
Frequency mid to test	True
Frequency high to test	False
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at BW [MHz]: 20


Test freq: mid, UL[MHz]/CH 3840/656000, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.16 12.4 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE

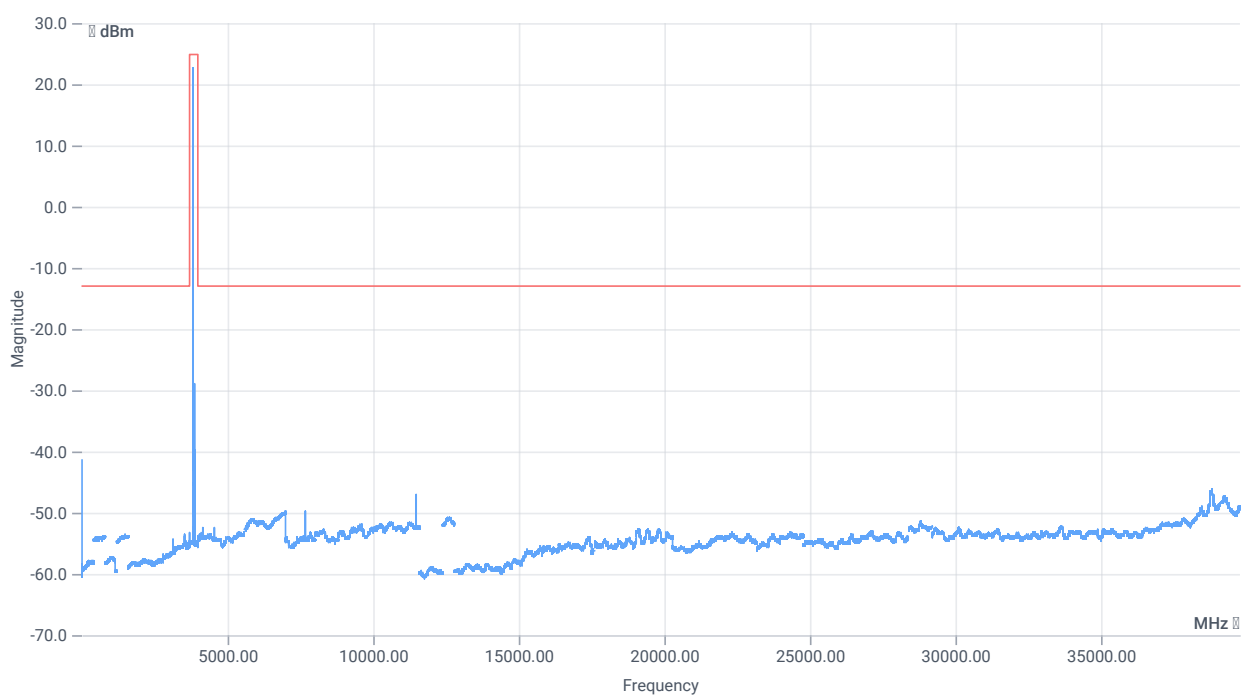

TX emissions

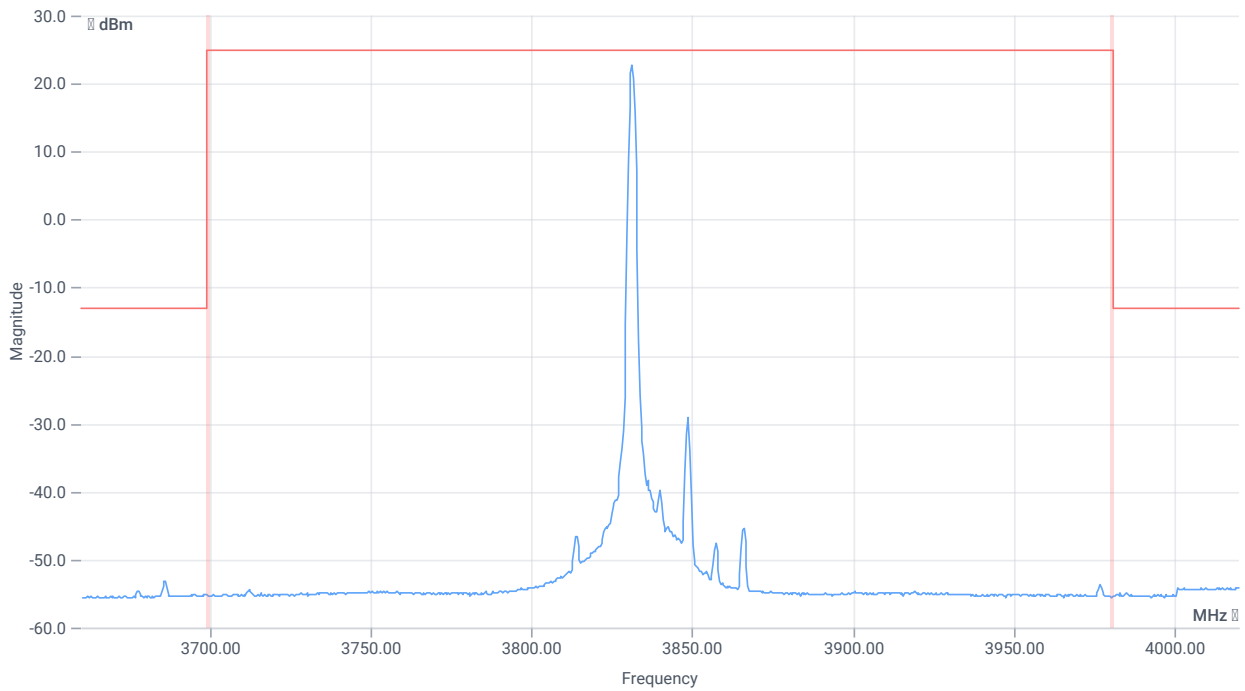

TX emissions band zoomed

RESULT Test freq: mid, UL[MHz]/CH 3840/656000, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30

References

TC start	05.02.2026 11:54:11
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_B
Information	Burst Mode - ANT 2

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter


Technology to test	NR
Band	Band_77_B
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True
Frequency mid to test	False
Frequency high to test	False
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at BW [MHz]: 20


Test freq: low, UL[MHz]/CH 3710.01/647334, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.50 12.81 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE

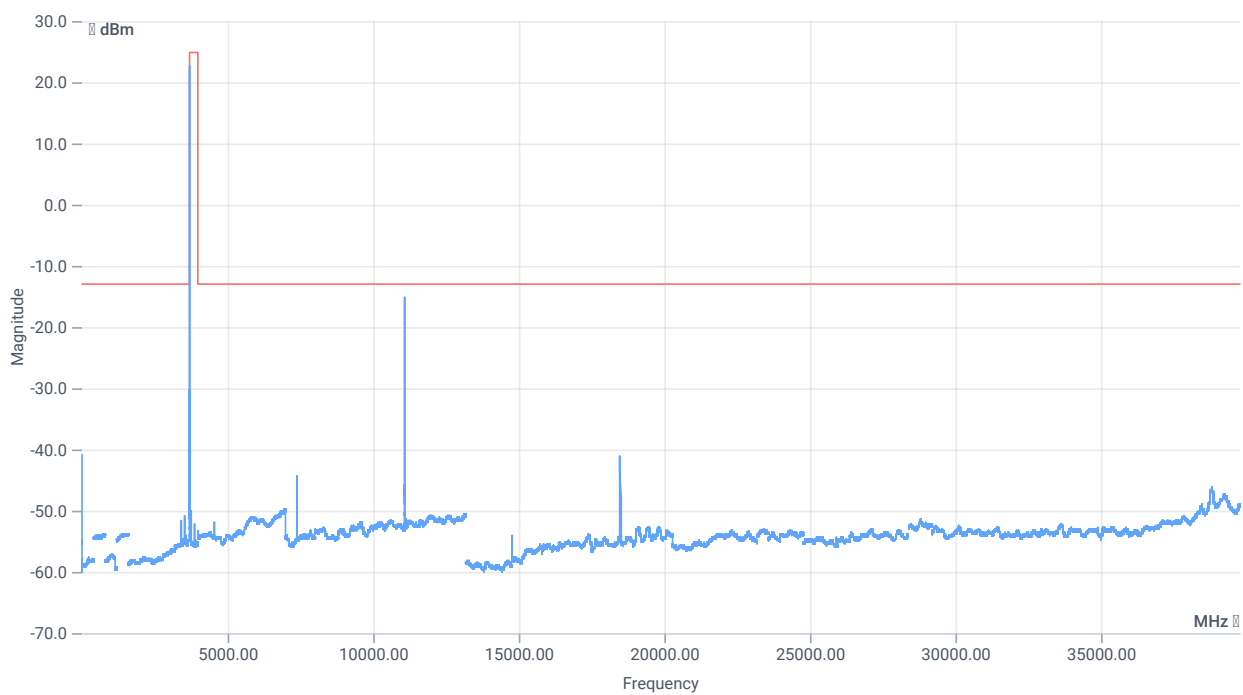

TX emissions

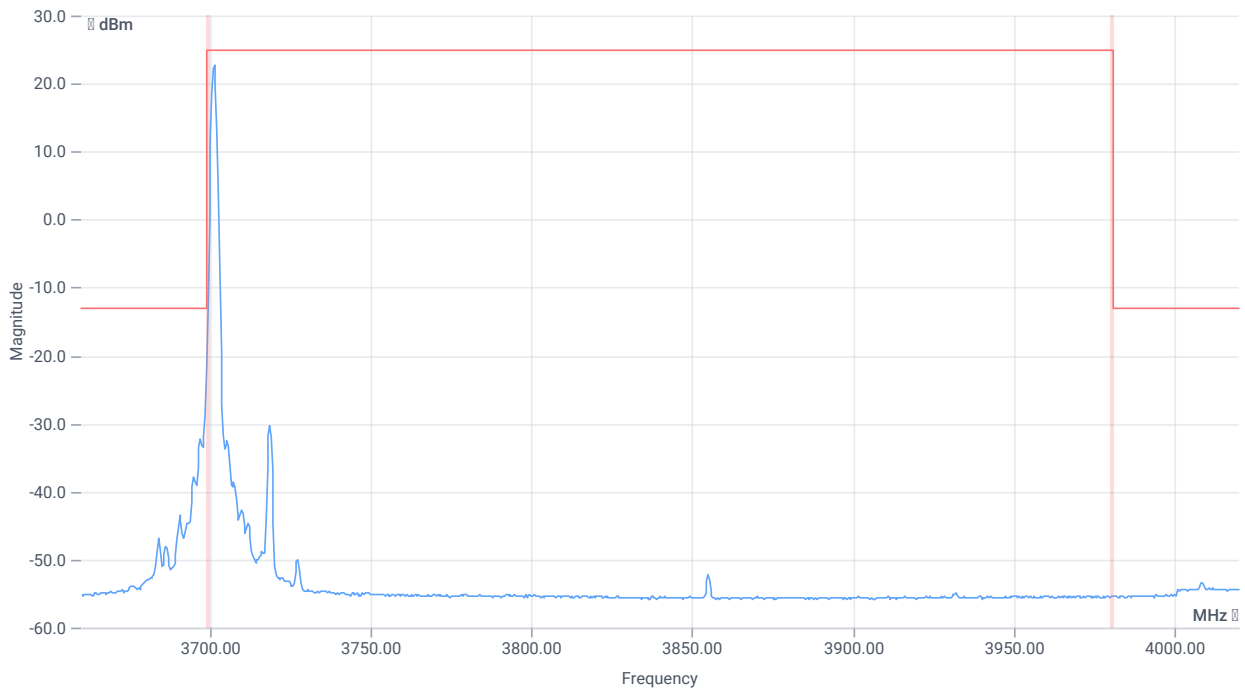

TX emissions band zoomed

RESULT Test freq: low, UL[MHz]/CH 3710.01/647334, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30

References

TC start	05.02.2026 11:48:23
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_A
Information	Burst Mode - ANT 2

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter


Technology to test	NR
Band	Band_77_A
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False
Frequency mid to test	False
Frequency high to test	True
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at BW [MHz]: 20

Test freq: high, UL[MHz]/CH 3540/636000, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.37 12.91 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE

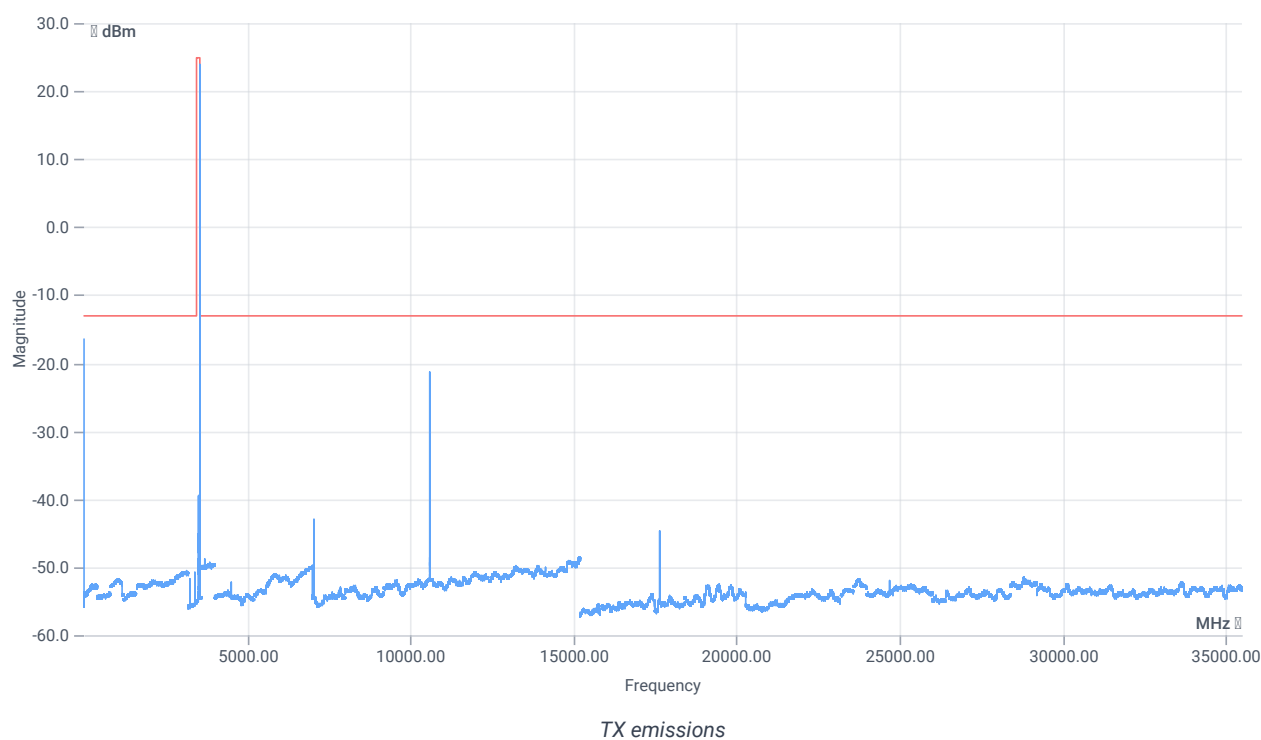

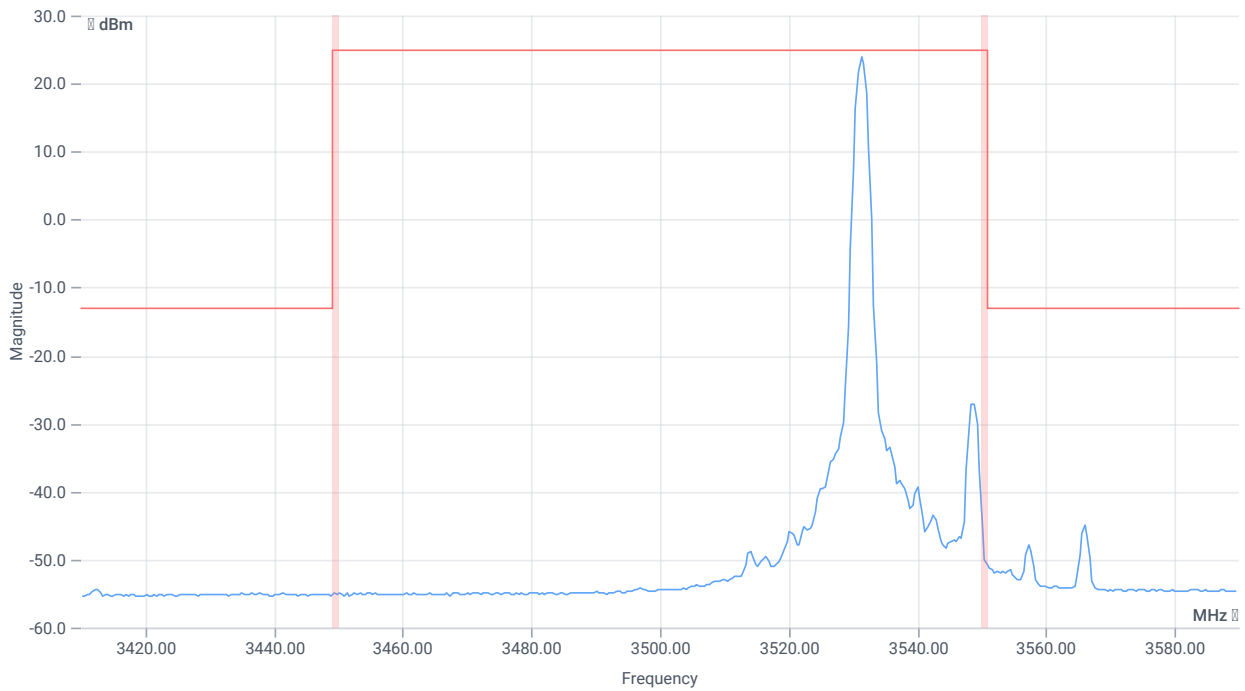

TX emissions band zoomed

RESULT Test freq: high, UL[MHz]/CH 3540/636000, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30

References

TC start	05.02.2026 11:42:34
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_A
Information	Burst Mode - ANT 2

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter

Technology to test	NR
Band	Band_77_A
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False
Frequency mid to test	True
Frequency high to test	False
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at BW [MHz]: 20

Test freq: mid, UL[MHz]/CH 3499.98/633332, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.71 12.56 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE



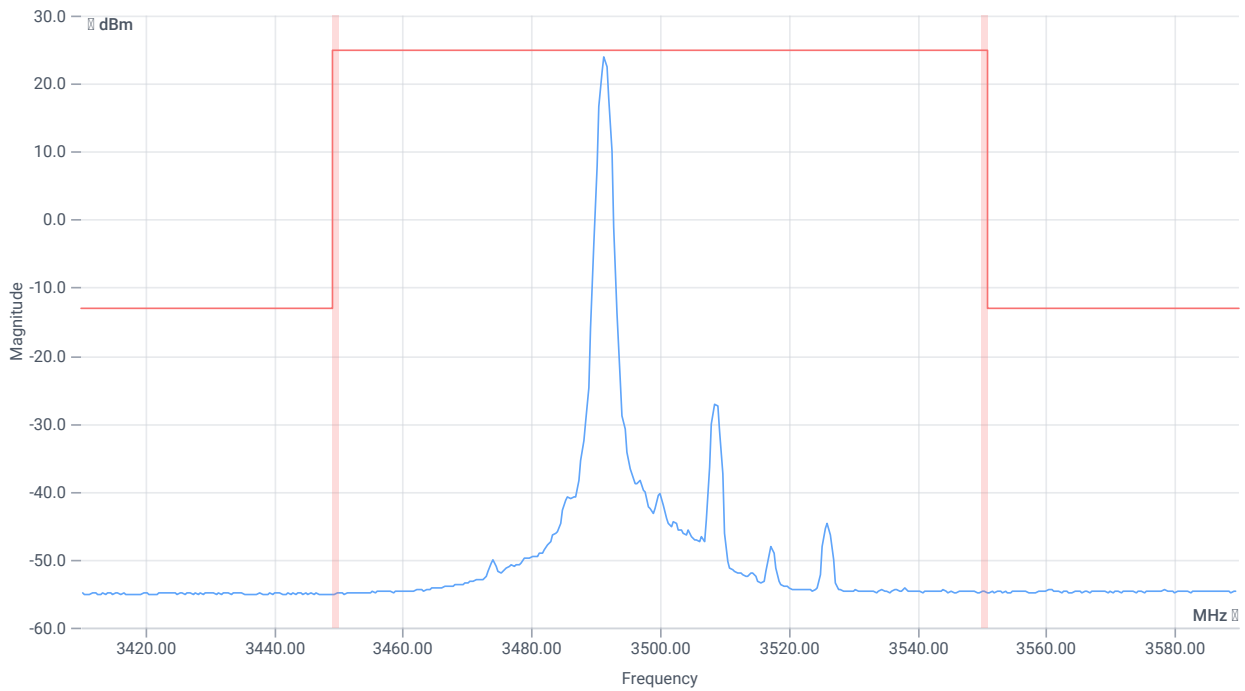

TX emissions band zoomed

RESULT Test freq: mid, UL[MHz]/CH 3499.98/633332, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30

References

TC start	05.02.2026 11:36:46
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_A
Information	Burst Mode - ANT 2

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter


Technology to test	NR
Band	Band_77_A
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True
Frequency mid to test	False
Frequency high to test	False
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at BW [MHz]: 20

Test freq: low, UL[MHz]/CH 3460.02/630668, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.16 12.77 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE

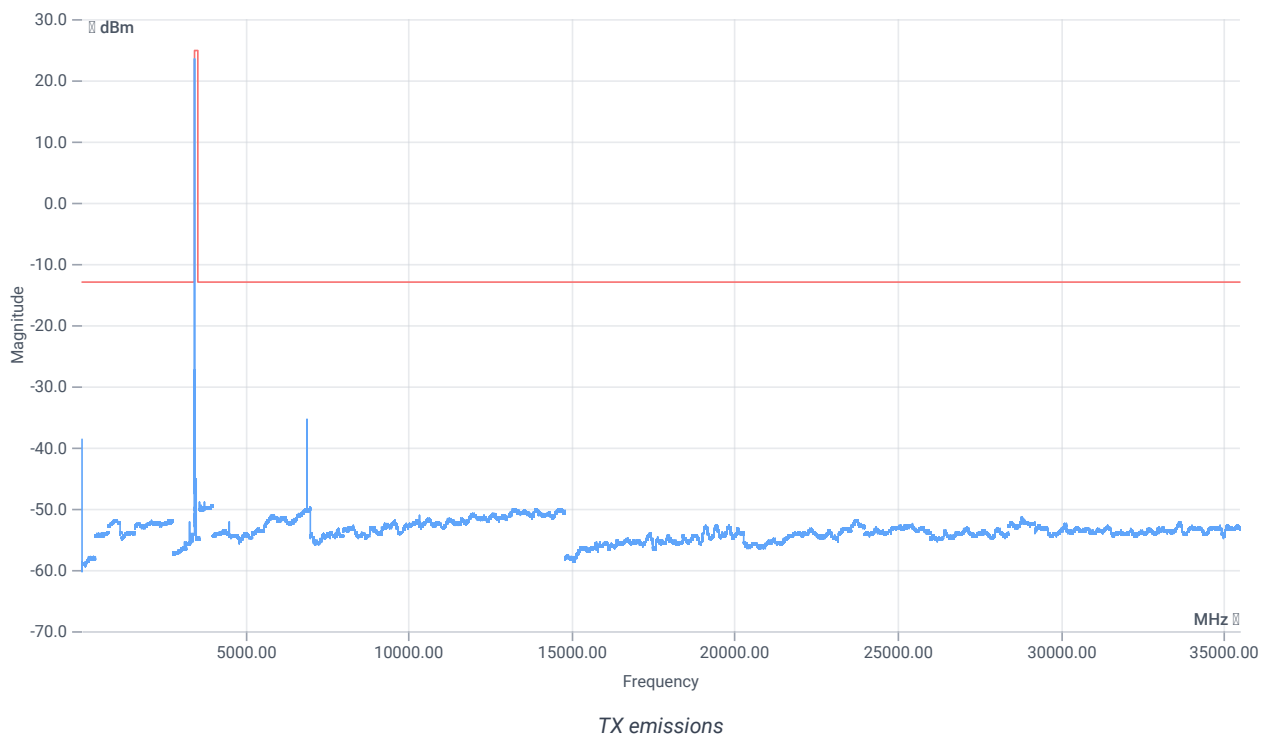

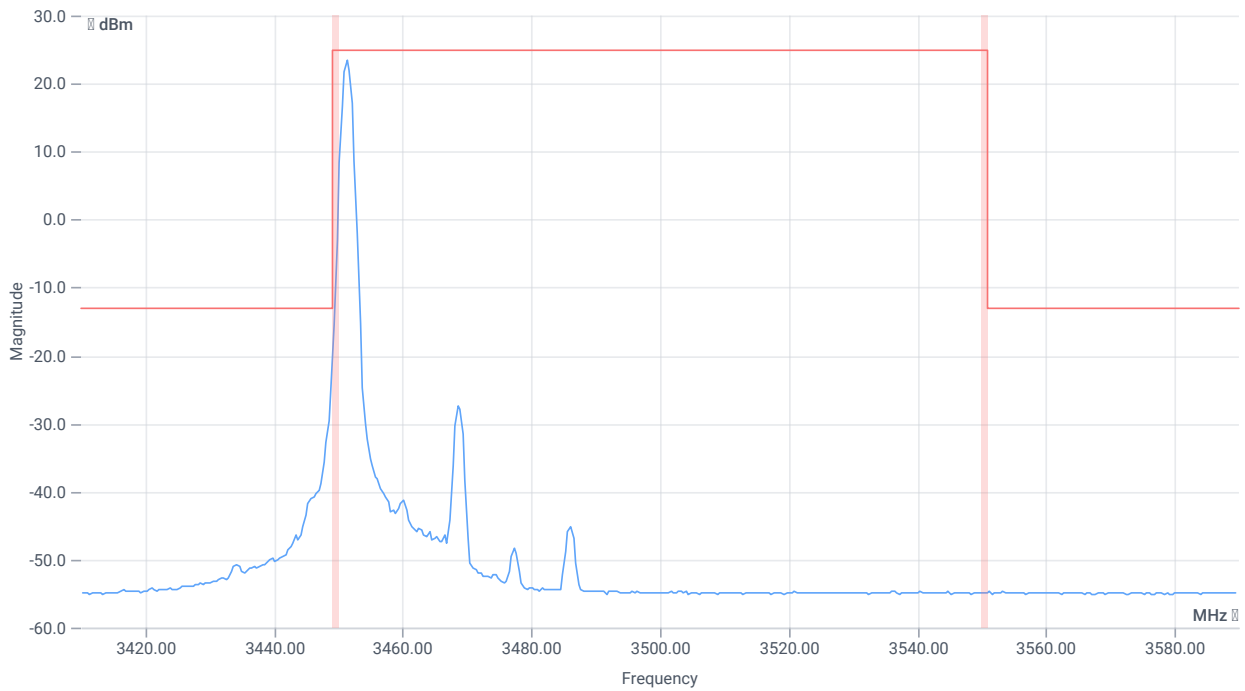

TX emissions band zoomed

RESULT Test freq: low, UL[MHz]/CH 3460.02/630668, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30

References

TC start	05.02.2026 11:20:08
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_B
Information	Burst Mode - ANT 1

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter


Technology to test	NR
Band	Band_77_B
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False
Frequency mid to test	False
Frequency high to test	True
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at BW [MHz]: 20

Test freq: high, UL[MHz]/CH 3969.99/664666, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.01 12.49 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE

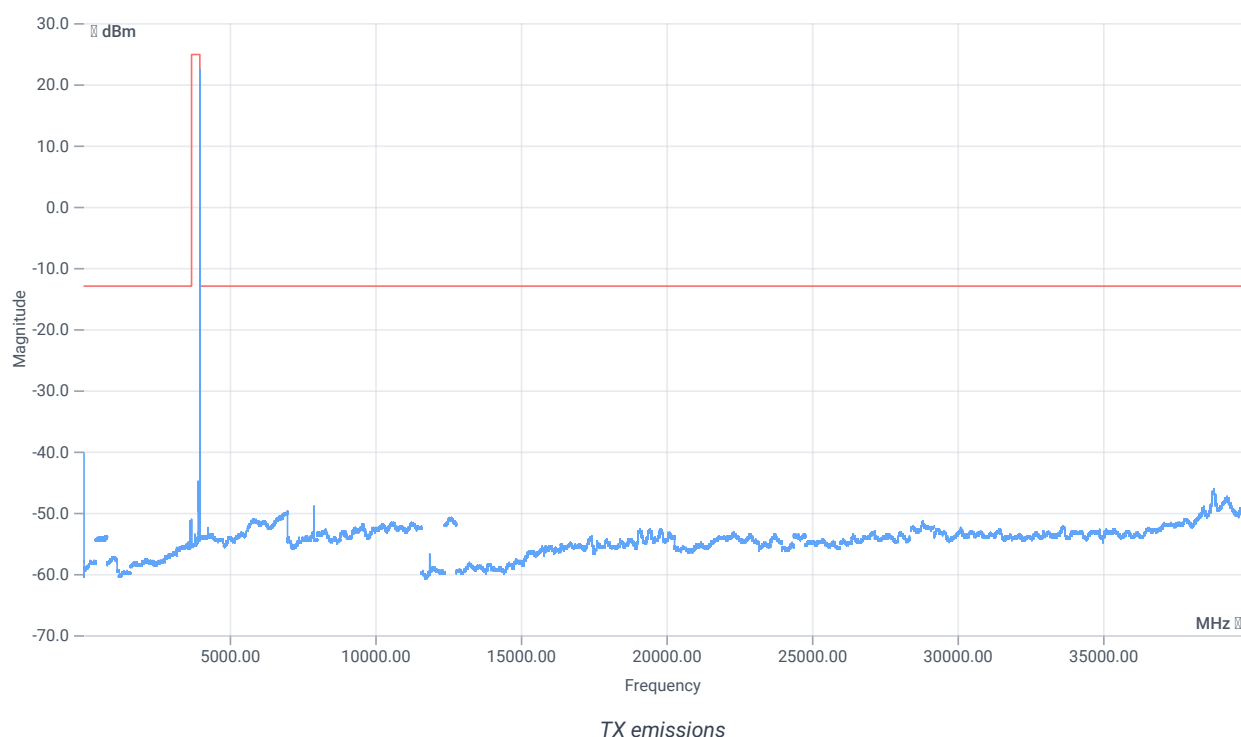

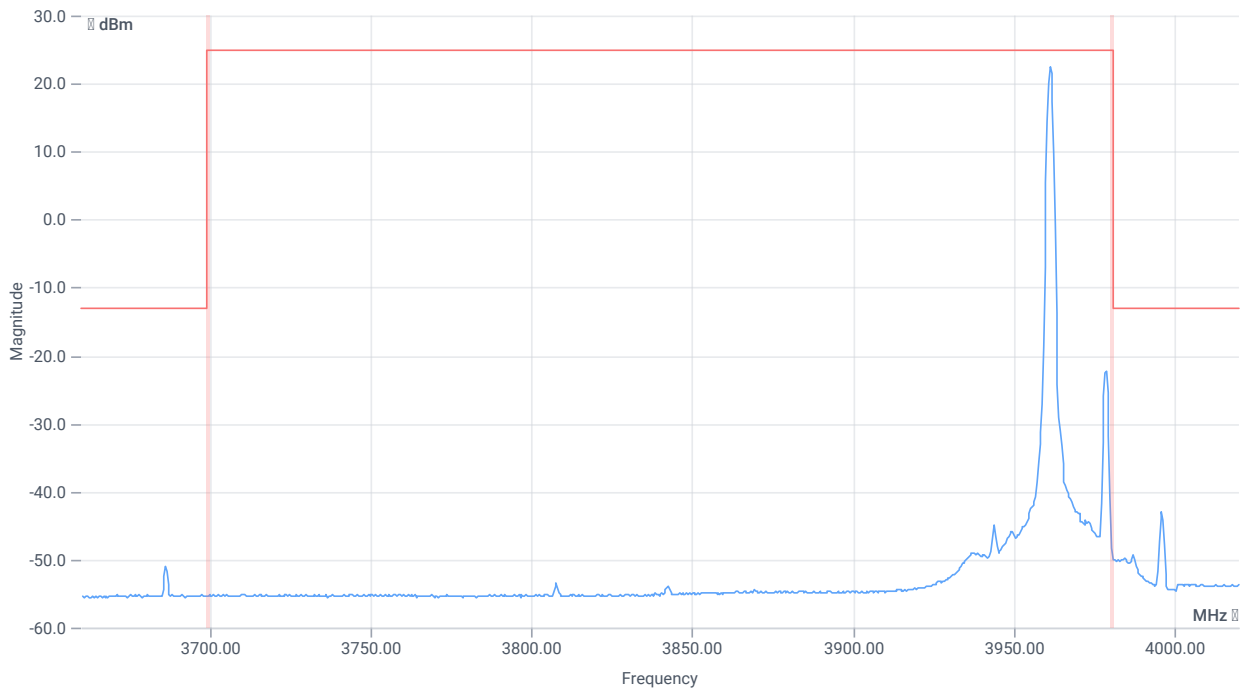

TX emissions band zoomed

RESULT Test freq: high, UL[MHz]/CH 3969.99/664666, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30

References

TC start	05.02.2026 11:13:41
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_B
Information	Burst Mode - ANT 1

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter


Technology to test	NR
Band	Band_77_B
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False
Frequency mid to test	True
Frequency high to test	False
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at BW [MHz]: 20


Test freq: mid, UL[MHz]/CH 3840/656000, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.09 12.4 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE

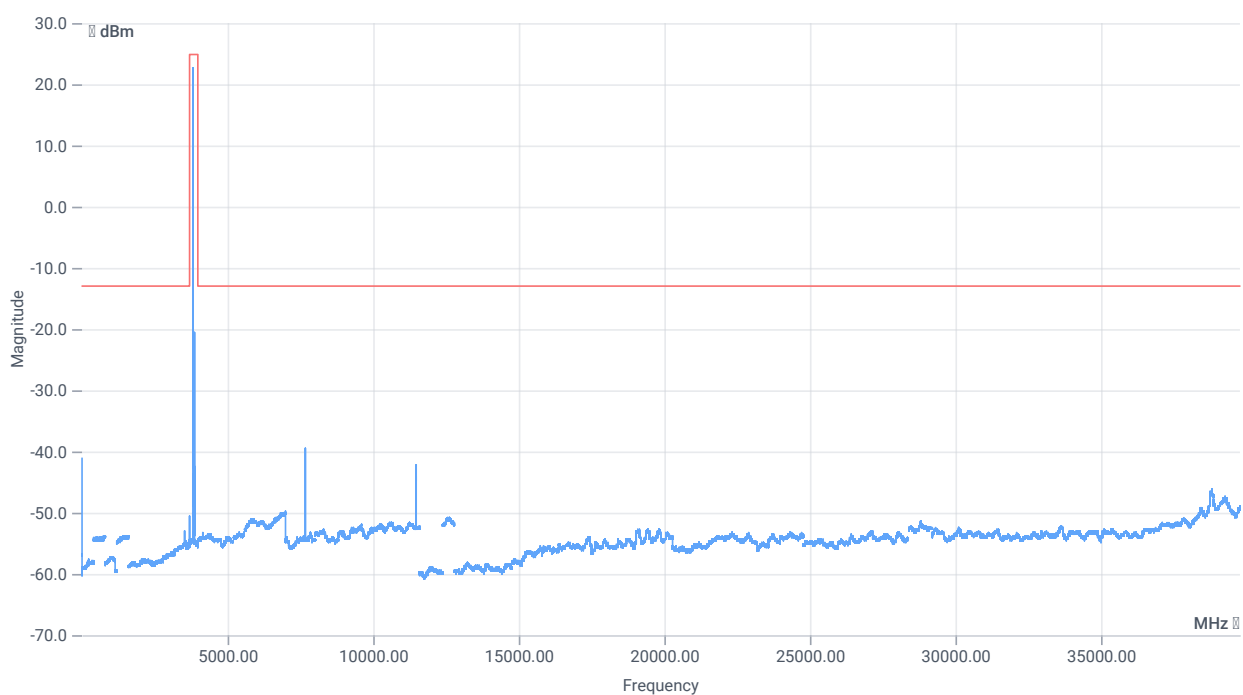

TX emissions

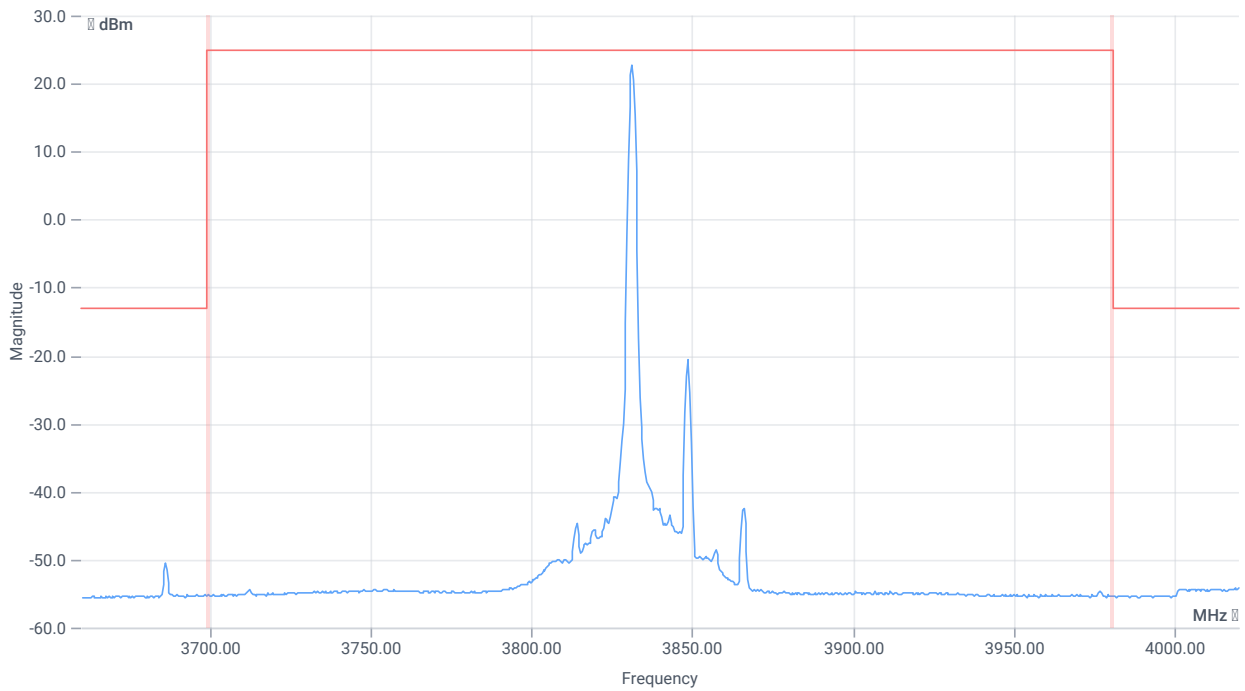

TX emissions band zoomed

RESULT Test freq: mid, UL[MHz]/CH 3840/656000, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_B Ant-EUT1 SCS-30

References

TC start	05.02.2026 11:07:12
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_B
Information	Burst Mode - ANT 1

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter


Technology to test	NR
Band	Band_77_B
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True
Frequency mid to test	False
Frequency high to test	False
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at BW [MHz]: 20


Test freq: low, UL[MHz]/CH 3710.01/647334, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.19 12.81 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE

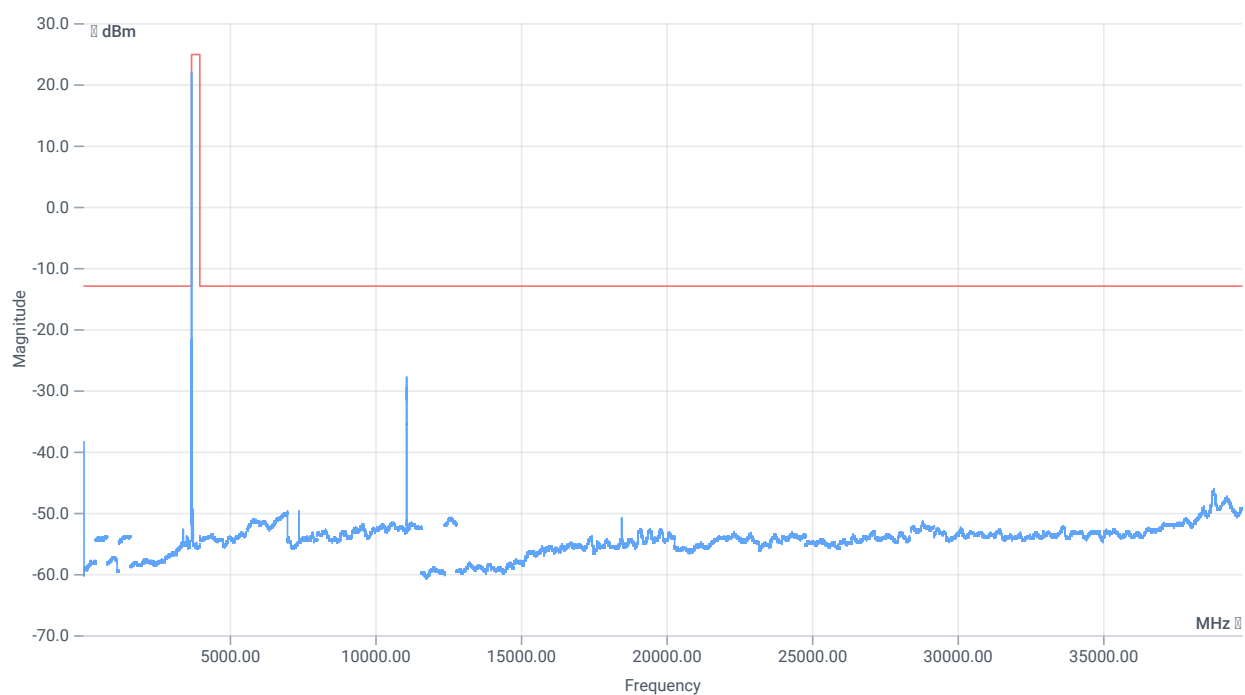

TX emissions

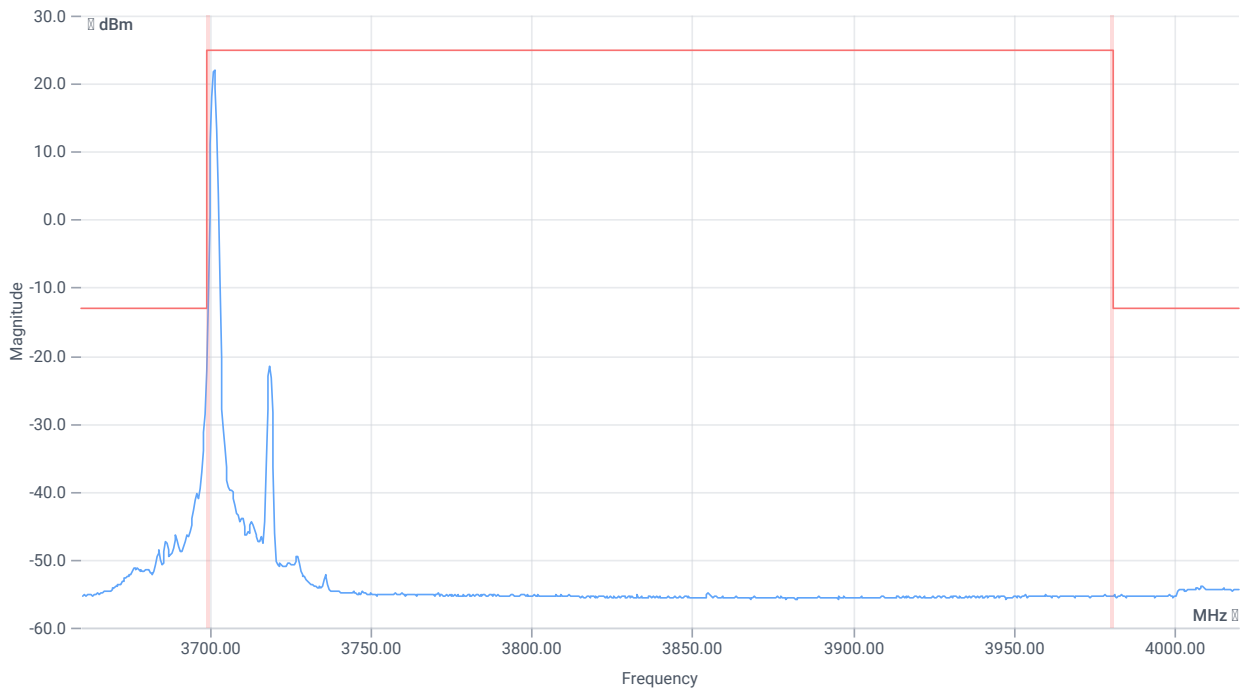

TX emissions band zoomed

RESULT Test freq: low, UL[MHz]/CH 3710.01/647334, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30

References

TC start	05.02.2026 11:01:23
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_A
Information	Burst Mode - ANT 1

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter

Technology to test	NR
Band	Band_77_A
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False
Frequency mid to test	False
Frequency high to test	True
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at BW [MHz]: 20

Test freq: high, UL[MHz]/CH 3540/636000, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.55 12.91 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE



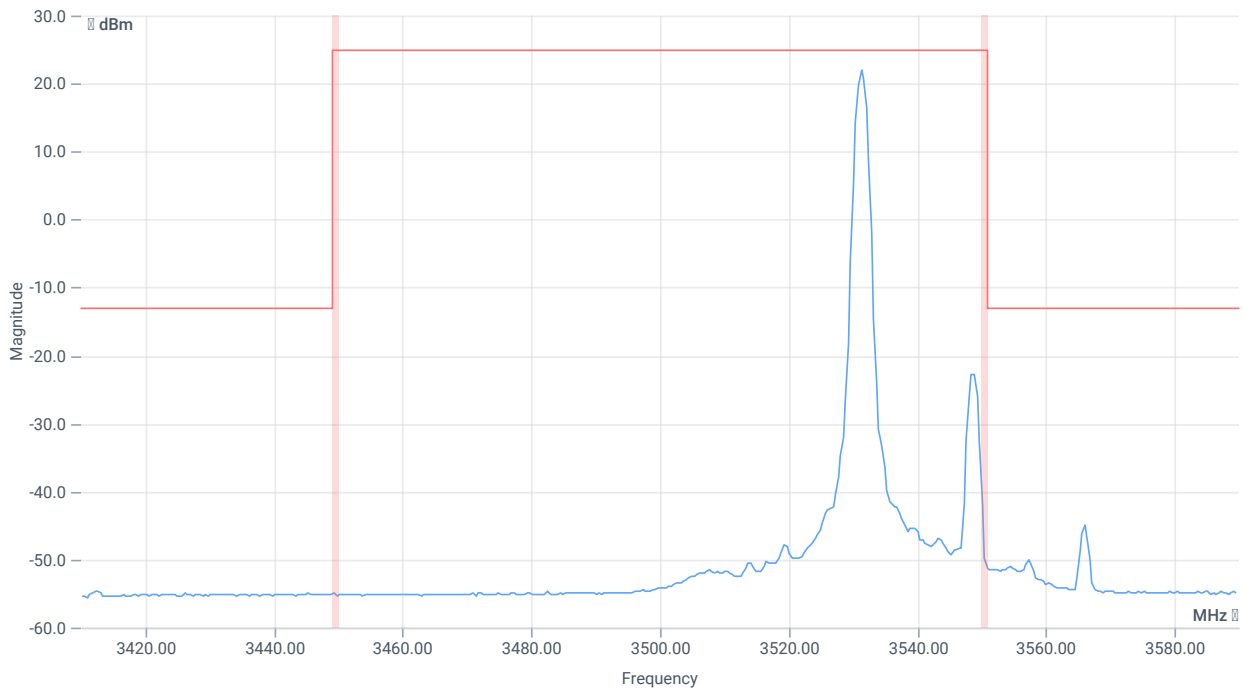

TX emissions band zoomed

RESULT Test freq: high, UL[MHz]/CH 3540/636000, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30

References

TC start	05.02.2026 10:55:33
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_A
Information	Burst Mode - ANT 1

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter

Technology to test	NR
Band	Band_77_A
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False
Frequency mid to test	True
Frequency high to test	False
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at BW [MHz]: 20

Test freq: mid, UL[MHz]/CH 3499.98/633332, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.99 12.56 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE



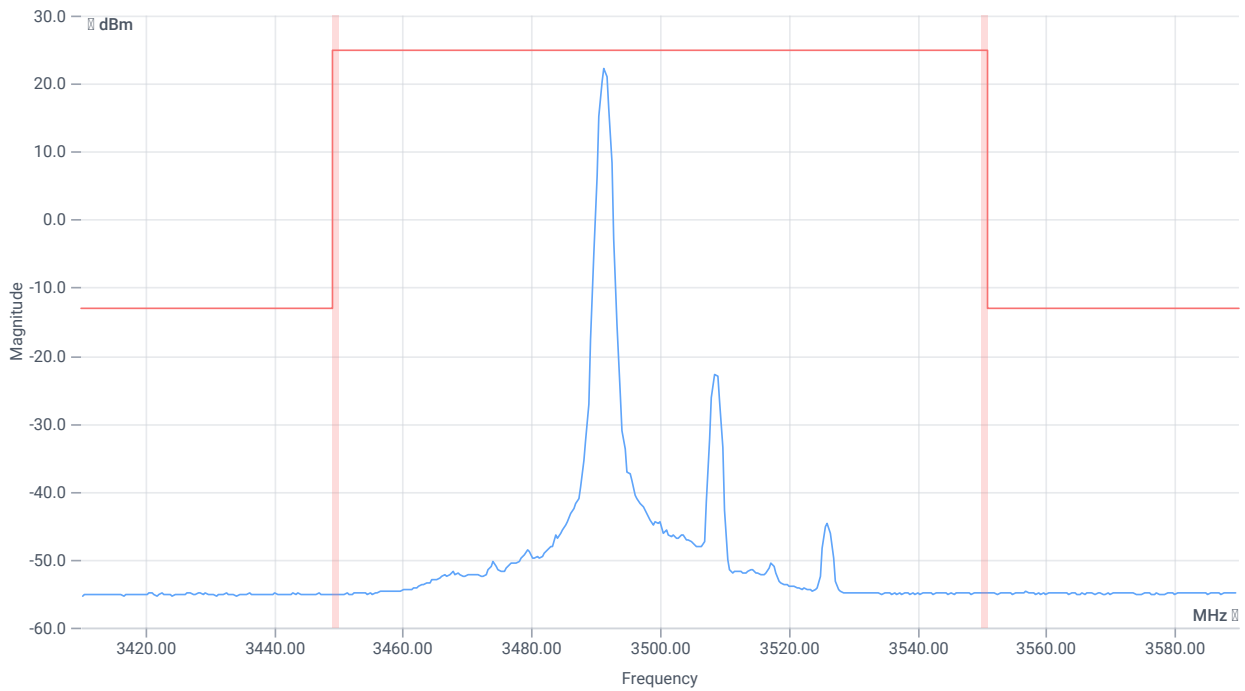

TX emissions band zoomed

RESULT Test freq: mid, UL[MHz]/CH 3499.98/633332, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

FCC, ISED # TX Emissions conducted ~ NR Band_77_A Ant-EUT1 SCS-30

References

TC start	05.02.2026 10:49:43
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	6.0.5.7
Standard Version	FCC, ISED NI
Method	
Description	FCC/ISED TX Emissions conducted - NR Band_77_A
Information	Burst Mode - ANT 1

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.71
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test parameter

Technology to test	NR
Band	Band_77_A
SCS [kHz]	30
Waveform	DFTOFDM
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True
Frequency mid to test	False
Frequency high to test	False
Auto control enabled power supply climatic box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at BW [MHz]: 20

Test freq: low, UL[MHz]/CH 3460.02/630668, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.79 12.77 20
Start [MHz] Stop [MHz]	1.000 401.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	1600 1 1001 SWE



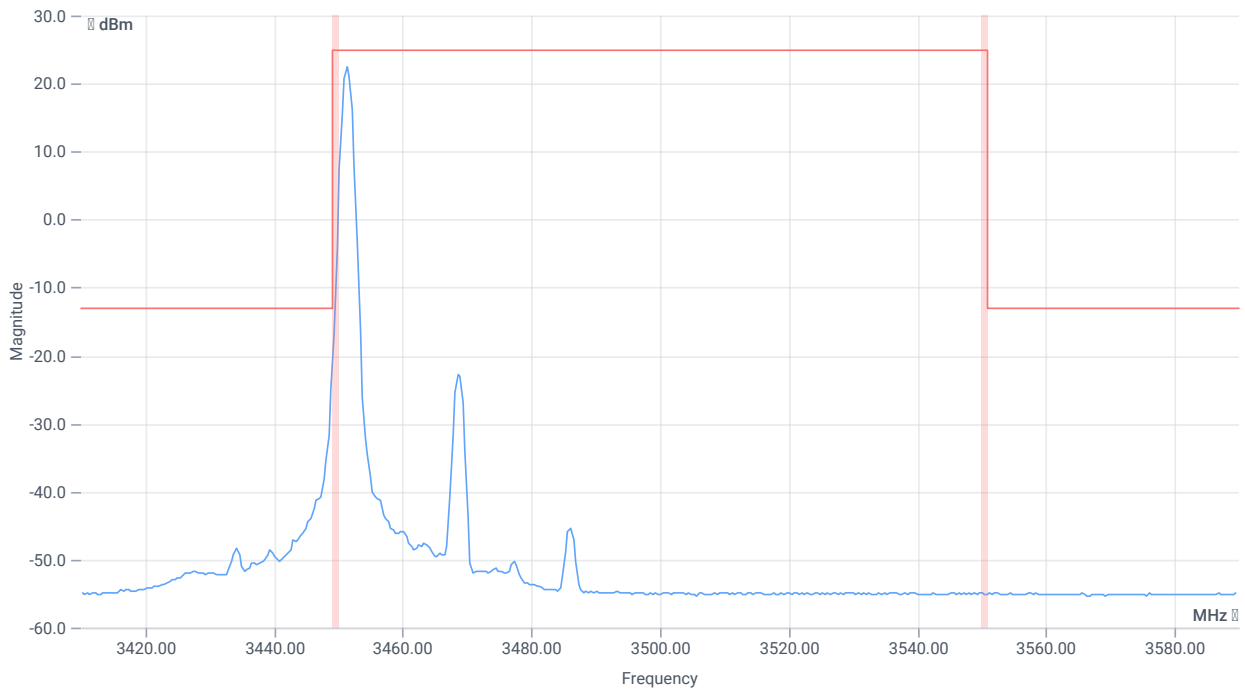

TX emissions band zoomed

RESULT Test freq: low, UL[MHz]/CH 3460.02/630668, CBW [MHz]: 20, RB_1_lowPlus1, Mod: QPSK

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peaks higher limit	---	0	0	no	PASS

Verdict

PASS

- END OF DOCUMENT -