| Test Result of EUT ceased transmission (NII-6 Band) | |
|---|---|
| 802.11be-EHT20 / CH97 | 802.11be-EHT320 / CH95 (Low Edge) |
| 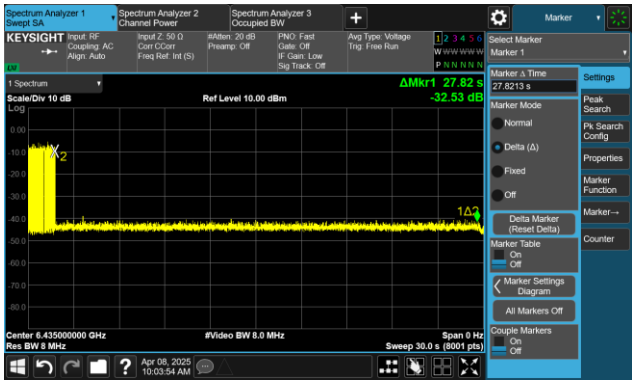 | 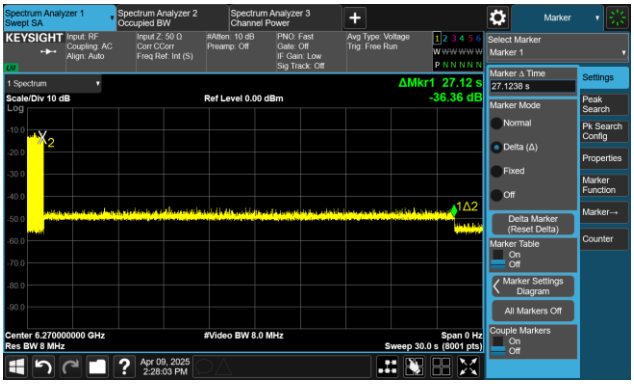 |
| 802.11be-EHT320 / CH95 (Middle) | 802.11be-EHT320 / CH95 (High Edge) |
| | 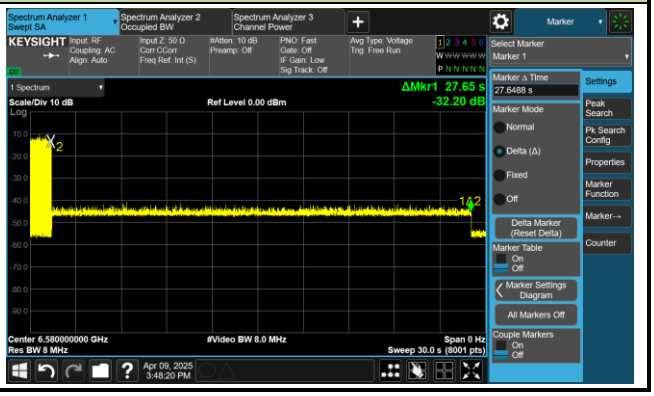 |

| Test Result of EUT ceased transmission (NII-7 Band) | |
|---|---|
| 802.11be-EHT20 / CH181 | 802.11be-EHT320 / CH159 (Low Edge) |
| 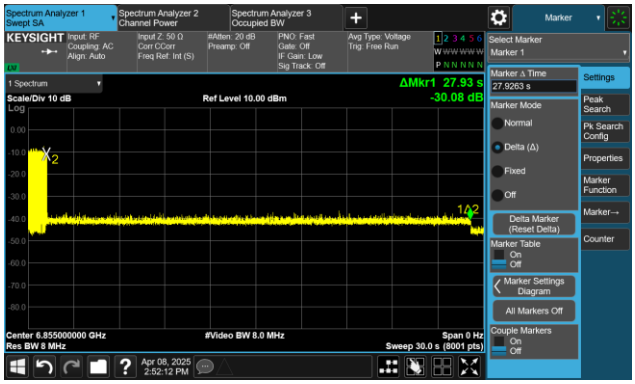 | |
| 802.11be-EHT320 / CH159 (Middle) | 802.11be-EHT320 / CH159 (High Edge) |
| 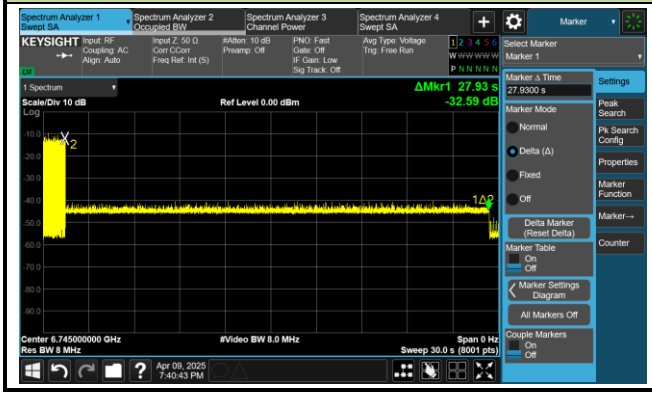 | 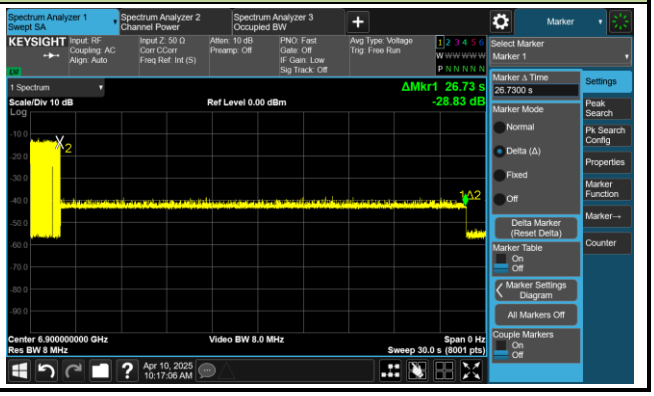 |

| Test Result of EUT ceased transmission (NII-8 Band) | |
|---|---|
| 802.11be-EHT20 / CH181 | 802.11be-EHT320 / CH191 (Low Edge) |
| 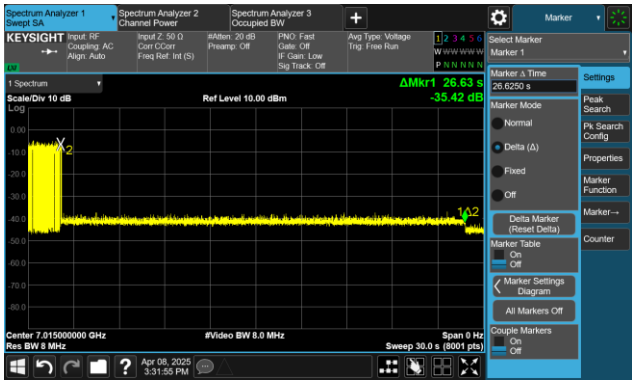 | 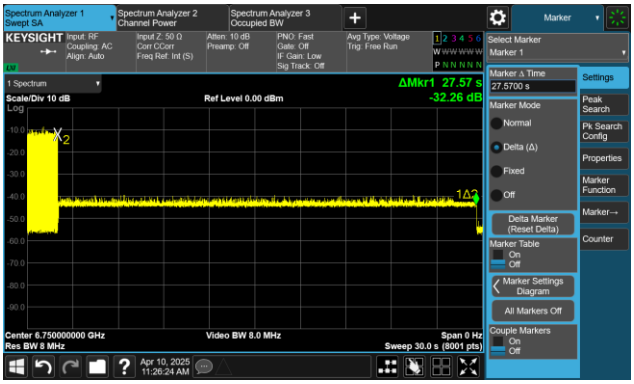 |
| 802.11be-EHT320 / CH191 (Middle) | 802.11be-EHT320 / CH191 (High Edge) |
| | |

### A.8 Radiated Spurious Emission Test Result

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 1 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 14387.5 | 46.4 | 3.5 | 49.9 | 88.2 | -38.3 | Peak | Horizontal |
| | 15812.1 | 32.6 | 5.7 | 38.3 | 54.0 | -15.7 | Average | Horizontal |
| | 15812.1 | 45.8 | 5.7 | 51.5 | 74.0 | -22.5 | Peak | Horizontal |
| * | 17068.4 | 45.2 | 7.9 | 53.1 | 88.2 | -35.1 | Peak | Horizontal |
| | 17984.7 | 32.4 | 10.7 | 43.1 | 54.0 | -10.9 | Average | Horizontal |
| | 17984.7 | 43.6 | 10.7 | 54.3 | 74.0 | -19.7 | Peak | Horizontal |
| * | 14661.2 | 45.5 | 4.3 | 49.8 | 88.2 | -38.4 | Peak | Vertical |
| | 15829.1 | 32.8 | 6.0 | 38.8 | 54.0 | -15.2 | Average | Vertical |
| | 15829.1 | 45.7 | 6.0 | 51.7 | 74.0 | -22.3 | Peak | Vertical |
| * | 16998.7 | 45.0 | 7.5 | 52.5 | 88.2 | -35.7 | Peak | Vertical |
| | 17983.0 | 32.4 | 10.8 | 43.2 | 54.0 | -10.8 | Average | Vertical |
| | 17983.0 | 44.3 | 10.8 | 55.1 | 74.0 | -18.9 | Peak | Vertical |

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 49 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 7743.9 | 52.3 | -4.0 | 48.3 | 74.0 | -25.7 | Peak | Horizontal |
| | 11371.7 | 48.9 | -1.4 | 47.5 | 74.0 | -26.5 | Peak | Horizontal |
| * | 14764.9 | 45.5 | 4.6 | 50.1 | 88.2 | -38.1 | Peak | Horizontal |
| * | 17226.5 | 45.0 | 7.9 | 52.9 | 88.2 | -35.3 | Peak | Horizontal |
| | 7743.9 | 51.3 | -4.0 | 47.3 | 74.0 | -26.7 | Peak | Vertical |
| | 12078.9 | 48.3 | -1.6 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 14594.9 | 45.8 | 4.5 | 50.3 | 88.2 | -37.9 | Peak | Vertical |
| * | 17321.7 | 44.9 | 7.3 | 52.2 | 88.2 | -36.0 | Peak | Vertical |

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 93 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 8019.3 | 50.1 | -4.3 | 45.8 | 88.2 | -42.4 | Peak | Horizontal |
| | 9471.1 | 47.9 | -2.1 | 45.8 | 74.0 | -28.2 | Peak | Horizontal |
| | 12264.2 | 47.7 | -1.0 | 46.7 | 74.0 | -27.3 | Peak | Horizontal |
| * | 17059.9 | 44.3 | 8.0 | 52.3 | 88.2 | -35.9 | Peak | Horizontal |
| * | 8019.3 | 50.3 | -4.3 | 46.0 | 88.2 | -42.2 | Peak | Vertical |
| | 9447.3 | 47.9 | -1.9 | 46.0 | 74.0 | -28.0 | Peak | Vertical |
| | 11696.4 | 48.3 | -1.6 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 16905.2 | 44.5 | 7.6 | 52.1 | 88.2 | -36.1 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 97 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 9333.4 | 47.9 | -2.0 | 45.9 | 74.0 | -28.1 | Peak | Horizontal |
| | 12418.9 | 47.7 | -0.9 | 46.8 | 74.0 | -27.2 | Peak | Horizontal |
| * | 13695.6 | 47.4 | 1.9 | 49.3 | 88.2 | -38.9 | Peak | Horizontal |
| * | 16837.2 | 45.3 | 7.0 | 52.3 | 88.2 | -35.9 | Peak | Horizontal |
| | 9345.3 | 47.5 | -2.0 | 45.5 | 74.0 | -28.5 | Peak | Vertical |
| | 12264.2 | 47.8 | -1.0 | 46.8 | 74.0 | -27.2 | Peak | Vertical |
| * | 14572.8 | 45.0 | 4.6 | 49.6 | 88.2 | -38.6 | Peak | Vertical |
| * | 16830.4 | 44.6 | 7.5 | 52.1 | 88.2 | -36.1 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 105 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 9445.6 | 47.7 | -1.9 | 45.8 | 74.0 | -28.2 | Peak | Horizontal |
| | 12245.5 | 47.7 | -1.2 | 46.5 | 74.0 | -27.5 | Peak | Horizontal |
| * | 14564.3 | 45.0 | 4.7 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| * | 16920.5 | 45.0 | 7.4 | 52.4 | 88.2 | -35.8 | Peak | Horizontal |
| | 9007.0 | 48.4 | -2.1 | 46.3 | 74.0 | -27.7 | Peak | Vertical |
| | 11371.7 | 48.6 | -1.4 | 47.2 | 74.0 | -26.8 | Peak | Vertical |
| * | 14572.8 | 45.8 | 4.6 | 50.4 | 88.2 | -37.8 | Peak | Vertical |
| * | 17274.1 | 44.8 | 7.5 | 52.3 | 88.2 | -35.9 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 113 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 8143.4 | 49.2 | -3.2 | 46.0 | 74.0 | -28.0 | Peak | Horizontal |
| | 9428.6 | 48.6 | -2.0 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14780.2 | 45.4 | 4.5 | 49.9 | 88.2 | -38.3 | Peak | Horizontal |
| * | 16900.1 | 44.7 | 7.7 | 52.4 | 88.2 | -35.8 | Peak | Horizontal |
| | 9071.6 | 48.3 | -2.0 | 46.3 | 74.0 | -27.7 | Peak | Vertical |
| | 12070.4 | 48.6 | -1.6 | 47.0 | 74.0 | -27.0 | Peak | Vertical |
| * | 14503.1 | 45.5 | 4.4 | 49.9 | 88.2 | -38.3 | Peak | Vertical |
| * | 17335.3 | 44.6 | 7.8 | 52.4 | 88.2 | -35.8 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 117 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 9046.1 | 48.0 | -2.1 | 45.9 | 74.0 | -28.1 | Peak | Horizontal |
| | 11142.2 | 48.2 | -1.3 | 46.9 | 74.0 | -27.1 | Peak | Horizontal |
| * | 14574.5 | 45.7 | 4.6 | 50.3 | 88.2 | -37.9 | Peak | Horizontal |
| * | 17017.4 | 44.7 | 7.9 | 52.6 | 88.2 | -35.6 | Peak | Horizontal |
| | 9447.3 | 47.1 | -1.9 | 45.2 | 74.0 | -28.8 | Peak | Vertical |
| | 12153.7 | 48.2 | -1.4 | 46.8 | 74.0 | -27.2 | Peak | Vertical |
| * | 14503.1 | 45.7 | 4.4 | 50.1 | 88.2 | -38.1 | Peak | Vertical |
| * | 16910.3 | 45.3 | 7.6 | 52.9 | 88.2 | -35.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 149 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 8369.5 | 52.6 | -3.5 | 49.1 | 74.0 | -24.9 | Peak | Horizontal |
| | 12339.0 | 47.0 | -0.7 | 46.3 | 74.0 | -27.7 | Peak | Horizontal |
| * | 14702.0 | 45.0 | 4.7 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| * | 17141.5 | 44.2 | 8.0 | 52.2 | 88.2 | -36.0 | Peak | Horizontal |
| | 9032.5 | 47.3 | -2.0 | 45.3 | 74.0 | -28.7 | Peak | Vertical |
| | 12327.1 | 47.4 | -1.0 | 46.4 | 74.0 | -27.6 | Peak | Vertical |
| * | 14758.1 | 44.4 | 4.4 | 48.8 | 88.2 | -39.4 | Peak | Vertical |
| * | 17037.8 | 44.1 | 7.6 | 51.7 | 88.2 | -36.5 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 181 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 8568.4 | 49.6 | -3.1 | 46.5 | 88.2 | -41.7 | Peak | Horizontal |
| | 9044.4 | 47.7 | -2.1 | 45.6 | 74.0 | -28.4 | Peak | Horizontal |
| | 12401.9 | 48.6 | -1.2 | 47.4 | 74.0 | -26.6 | Peak | Horizontal |
| * | 17126.2 | 44.5 | 8.1 | 52.6 | 88.2 | -35.6 | Peak | Horizontal |
| | 9078.4 | 47.0 | -2.0 | 45.0 | 74.0 | -29.0 | Peak | Vertical |
| | 11630.1 | 48.2 | -1.6 | 46.6 | 74.0 | -27.4 | Peak | Vertical |
| * | 14576.2 | 45.1 | 4.6 | 49.7 | 88.2 | -38.5 | Peak | Vertical |
| * | 17039.5 | 43.9 | 7.7 | 51.6 | 88.2 | -36.6 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 185 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 8593.9 | 50.8 | -3.1 | 47.7 | 88.2 | -40.5 | Peak | Horizontal |
| * | 10096.7 | 48.3 | -1.6 | 46.7 | 88.2 | -41.5 | Peak | Horizontal |
| | 12155.4 | 48.0 | -1.4 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| | 15861.4 | 45.4 | 5.5 | 50.9 | 74.0 | -23.1 | Peak | Horizontal |
| | 9170.2 | 48.0 | -2.1 | 45.9 | 74.0 | -28.1 | Peak | Vertical |
| | 11574.0 | 47.7 | -1.3 | 46.4 | 74.0 | -27.6 | Peak | Vertical |
| * | 13603.8 | 48.1 | 1.9 | 50.0 | 88.2 | -38.2 | Peak | Vertical |
| * | 17280.9 | 44.8 | 7.4 | 52.2 | 88.2 | -36.0 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 189 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 9352.1 | 47.9 | -2.1 | 45.8 | 74.0 | -28.2 | Peak | Horizontal |
| | 11890.2 | 48.3 | -1.7 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 13704.1 | 48.2 | 1.9 | 50.1 | 88.2 | -38.1 | Peak | Horizontal |
| * | 17306.4 | 45.2 | 7.1 | 52.3 | 88.2 | -35.9 | Peak | Horizontal |
| | 9063.1 | 47.4 | -2.1 | 45.3 | 74.0 | -28.7 | Peak | Vertical |
| | 12332.2 | 47.3 | -0.9 | 46.4 | 74.0 | -27.6 | Peak | Vertical |
| * | 14516.7 | 44.9 | 4.4 | 49.3 | 88.2 | -38.9 | Peak | Vertical |
| * | 16939.2 | 45.1 | 7.3 | 52.4 | 88.2 | -35.8 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 209 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 9056.3 | 47.3 | -2.1 | 45.2 | 74.0 | -28.8 | Peak | Horizontal |
| | 12187.7 | 47.8 | -1.4 | 46.4 | 74.0 | -27.6 | Peak | Horizontal |
| * | 14520.1 | 45.1 | 4.4 | 49.5 | 88.2 | -38.7 | Peak | Horizontal |
| * | 17008.9 | 44.2 | 7.8 | 52.0 | 88.2 | -36.2 | Peak | Horizontal |
| | 9177.0 | 48.1 | -2.2 | 45.9 | 74.0 | -28.1 | Peak | Vertical |
| | 11252.7 | 47.9 | -1.4 | 46.5 | 74.0 | -27.5 | Peak | Vertical |
| * | 13719.4 | 46.5 | 2.0 | 48.5 | 88.2 | -39.7 | Peak | Vertical |
| * | 17093.9 | 44.6 | 7.8 | 52.4 | 88.2 | -35.8 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Justin Guo |
| Test Mode | 802.11a | Test Channel | 229 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 9129.4 | 48.5 | -2.2 | 46.3 | 74.0 | -27.7 | Peak | Horizontal |
| | 12313.5 | 47.9 | -1.3 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 13614.0 | 46.7 | 2.0 | 48.7 | 88.2 | -39.5 | Peak | Horizontal |
| * | 17046.3 | 44.6 | 8.1 | 52.7 | 88.2 | -35.5 | Peak | Horizontal |
| | 9457.5 | 47.1 | -1.9 | 45.2 | 74.0 | -28.8 | Peak | Vertical |
| | 12293.1 | 47.9 | -1.3 | 46.6 | 74.0 | -27.4 | Peak | Vertical |
| * | 14783.6 | 45.2 | 4.4 | 49.6 | 88.2 | -38.6 | Peak | Vertical |
| * | 17282.6 | 45.0 | 7.3 | 52.3 | 88.2 | -35.9 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 1 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 51.7 | -1.5 | 50.2 | 88.2 | -38.0 | Peak | Horizontal |
| | 12116.3 | 48.5 | -1.7 | 46.8 | 74.0 | -27.2 | Peak | Horizontal |
| * | 14577.9 | 45.3 | 4.5 | 49.8 | 88.2 | -38.4 | Peak | Horizontal |
| | 15711.8 | 44.3 | 5.9 | 50.2 | 74.0 | -23.8 | Peak | Horizontal |
| * | 9999.8 | 50.1 | -1.5 | 48.6 | 88.2 | -39.6 | Peak | Vertical |
| | 11687.9 | 48.2 | -1.5 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 14562.6 | 45.2 | 4.7 | 49.9 | 88.2 | -38.3 | Peak | Vertical |
| | 15878.4 | 45.7 | 4.8 | 50.5 | 74.0 | -23.5 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 49 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 50.9 | -1.5 | 49.4 | 88.2 | -38.8 | Peak | Horizontal |
| | 11640.3 | 48.4 | -1.4 | 47.0 | 74.0 | -27.0 | Peak | Horizontal |
| * | 14504.8 | 45.5 | 4.4 | 49.9 | 88.2 | -38.3 | Peak | Horizontal |
| | 15711.8 | 44.3 | 5.9 | 50.2 | 74.0 | -23.8 | Peak | Horizontal |
| * | 9999.8 | 50.5 | -1.5 | 49.0 | 88.2 | -39.2 | Peak | Vertical |
| | 11353.0 | 48.1 | -1.5 | 46.6 | 74.0 | -27.4 | Peak | Vertical |
| * | 14606.8 | 45.4 | 4.6 | 50.0 | 88.2 | -38.2 | Peak | Vertical |
| | 16000.8 | 45.4 | 5.3 | 50.7 | 74.0 | -23.3 | Peak | Vertical |

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 61 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 10081.4 | 47.4 | -1.4 | 46.0 | 88.2 | -42.2 | Peak | Horizontal |
| | 11359.8 | 47.8 | -1.4 | 46.4 | 74.0 | -27.6 | Peak | Horizontal |
| * | 14596.6 | 45.3 | 4.5 | 49.8 | 88.2 | -38.4 | Peak | Horizontal |
| | 15830.8 | 44.6 | 6.0 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| * | 9999.8 | 49.2 | -1.5 | 47.7 | 88.2 | -40.5 | Peak | Vertical |
| | 11237.4 | 48.0 | -1.5 | 46.5 | 74.0 | -27.5 | Peak | Vertical |
| * | 14712.2 | 45.7 | 4.6 | 50.3 | 88.2 | -37.9 | Peak | Vertical |
| | 15841.0 | 44.7 | 6.0 | 50.7 | 74.0 | -23.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 93 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9772.0 | 48.1 | -2.0 | 46.1 | 88.2 | -42.1 | Peak | Horizontal |
| | 12255.7 | 48.2 | -1.0 | 47.2 | 74.0 | -26.8 | Peak | Horizontal |
| * | 14564.3 | 45.3 | 4.7 | 50.0 | 88.2 | -38.2 | Peak | Horizontal |
| | 15861.4 | 45.1 | 5.5 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| * | 9999.8 | 49.8 | -1.5 | 48.3 | 88.2 | -39.9 | Peak | Vertical |
| | 12425.7 | 49.0 | -0.8 | 48.2 | 74.0 | -25.8 | Peak | Vertical |
| * | 14656.1 | 45.5 | 4.4 | 49.9 | 88.2 | -38.3 | Peak | Vertical |
| | 16101.1 | 45.6 | 4.8 | 50.4 | 74.0 | -23.6 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 97 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9828.1 | 47.7 | -1.4 | 46.3 | 88.2 | -41.9 | Peak | Horizontal |
| | 11652.2 | 47.8 | -1.4 | 46.4 | 74.0 | -27.6 | Peak | Horizontal |
| | 15698.2 | 44.8 | 5.9 | 50.7 | 74.0 | -23.3 | Peak | Horizontal |
| * | 17122.8 | 45.3 | 8.1 | 53.4 | 88.2 | -34.8 | Peak | Horizontal |
| * | 9885.9 | 47.5 | -1.7 | 45.8 | 88.2 | -42.4 | Peak | Vertical |
| | 11640.3 | 47.7 | -1.4 | 46.3 | 74.0 | -27.7 | Peak | Vertical |
| * | 14606.8 | 46.0 | 4.6 | 50.6 | 88.2 | -37.6 | Peak | Vertical |
| | 16039.9 | 44.7 | 5.5 | 50.2 | 74.0 | -23.8 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 105 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9979.4 | 47.6 | -1.5 | 46.1 | 88.2 | -42.1 | Peak | Horizontal |
| | 11591.0 | 48.0 | -1.4 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14736.0 | 45.2 | 4.5 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15988.9 | 45.0 | 5.5 | 50.5 | 74.0 | -23.5 | Peak | Horizontal |
| * | 9999.8 | 49.6 | -1.5 | 48.1 | 88.2 | -40.1 | Peak | Vertical |
| | 11555.3 | 49.4 | -1.4 | 48.0 | 74.0 | -26.0 | Peak | Vertical |
| * | 14771.7 | 45.1 | 4.7 | 49.8 | 88.2 | -38.4 | Peak | Vertical |
| | 15706.7 | 44.3 | 6.1 | 50.4 | 74.0 | -23.6 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 113 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.6 | -1.5 | 47.1 | 88.2 | -41.1 | Peak | Horizontal |
| | 11570.6 | 48.2 | -1.3 | 46.9 | 74.0 | -27.1 | Peak | Horizontal |
| * | 14591.5 | 45.4 | 4.5 | 49.9 | 88.2 | -38.3 | Peak | Horizontal |
| | 15854.6 | 44.9 | 5.7 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| * | 9999.8 | 47.8 | -1.5 | 46.3 | 88.2 | -41.9 | Peak | Vertical |
| | 12087.4 | 48.3 | -1.6 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 14659.5 | 45.3 | 4.3 | 49.6 | 88.2 | -38.6 | Peak | Vertical |
| | 15613.2 | 45.3 | 5.3 | 50.6 | 74.0 | -23.4 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 117 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.5 | -1.5 | 47.0 | 88.2 | -41.2 | Peak | Horizontal |
| | 11441.4 | 48.1 | -1.4 | 46.7 | 74.0 | -27.3 | Peak | Horizontal |
| * | 14572.8 | 45.9 | 4.6 | 50.5 | 88.2 | -37.7 | Peak | Horizontal |
| | 15829.1 | 44.4 | 6.0 | 50.4 | 74.0 | -23.6 | Peak | Horizontal |
| * | 9999.8 | 49.6 | -1.5 | 48.1 | 88.2 | -40.1 | Peak | Vertical |
| | 11778.0 | 47.9 | -1.8 | 46.1 | 74.0 | -27.9 | Peak | Vertical |
| * | 14841.4 | 45.5 | 4.3 | 49.8 | 88.2 | -38.4 | Peak | Vertical |
| | 15699.9 | 45.0 | 6.0 | 51.0 | 74.0 | -23.0 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 149 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.2 | -1.5 | 46.7 | 88.2 | -41.5 | Peak | Horizontal |
| | 11570.6 | 48.0 | -1.3 | 46.7 | 74.0 | -27.3 | Peak | Horizontal |
| | 15611.5 | 45.2 | 5.4 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| * | 17048.0 | 45.8 | 8.2 | 54.0 | 88.2 | -34.2 | Peak | Horizontal |
| * | 9999.8 | 49.4 | -1.5 | 47.9 | 88.2 | -40.3 | Peak | Vertical |
| | 11589.3 | 48.1 | -1.4 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 14571.1 | 45.6 | 4.6 | 50.2 | 88.2 | -38.0 | Peak | Vertical |
| | 15861.4 | 45.4 | 5.5 | 50.9 | 74.0 | -23.1 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 181 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 47.8 | -1.5 | 46.3 | 88.2 | -41.9 | Peak | Horizontal |
| | 11405.7 | 48.3 | -1.7 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14506.5 | 46.0 | 4.4 | 50.4 | 88.2 | -37.8 | Peak | Horizontal |
| | 15703.3 | 44.7 | 6.1 | 50.8 | 74.0 | -23.2 | Peak | Horizontal |
| * | 9999.8 | 49.9 | -1.5 | 48.4 | 88.2 | -39.8 | Peak | Vertical |
| | 11443.1 | 48.6 | -1.4 | 47.2 | 74.0 | -26.8 | Peak | Vertical |
| * | 14705.4 | 45.7 | 4.7 | 50.4 | 88.2 | -37.8 | Peak | Vertical |
| | 15844.4 | 44.7 | 5.9 | 50.6 | 74.0 | -23.4 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 185 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.1 | -1.5 | 46.6 | 88.2 | -41.6 | Peak | Horizontal |
| | 11585.9 | 47.9 | -1.4 | 46.5 | 74.0 | -27.5 | Peak | Horizontal |
| * | 14579.6 | 44.9 | 4.5 | 49.4 | 88.2 | -38.8 | Peak | Horizontal |
| | 15837.6 | 45.0 | 6.0 | 51.0 | 74.0 | -23.0 | Peak | Horizontal |
| * | 9999.8 | 50.0 | -1.5 | 48.5 | 88.2 | -39.7 | Peak | Vertical |
| | 11696.4 | 48.1 | -1.6 | 46.5 | 74.0 | -27.5 | Peak | Vertical |
| * | 14608.5 | 46.1 | 4.6 | 50.7 | 88.2 | -37.5 | Peak | Vertical |
| | 15766.2 | 45.8 | 5.1 | 50.9 | 74.0 | -23.1 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 189 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.9 | -1.5 | 47.4 | 88.2 | -40.8 | Peak | Horizontal |
| | 11727.0 | 48.3 | -1.7 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14574.5 | 45.1 | 4.6 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15703.3 | 44.8 | 6.1 | 50.9 | 74.0 | -23.1 | Peak | Horizontal |
| * | 9999.8 | 50.1 | -1.5 | 48.6 | 88.2 | -39.6 | Peak | Vertical |
| | 12067.0 | 48.6 | -1.7 | 46.9 | 74.0 | -27.1 | Peak | Vertical |
| * | 14596.6 | 45.1 | 4.5 | 49.6 | 88.2 | -38.6 | Peak | Vertical |
| | 15829.1 | 44.6 | 6.0 | 50.6 | 74.0 | -23.4 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 209 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.4 | -1.5 | 46.9 | 88.2 | -41.3 | Peak | Horizontal |
| | 10965.4 | 48.2 | -1.4 | 46.8 | 74.0 | -27.2 | Peak | Horizontal |
| * | 14509.9 | 45.3 | 4.4 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15618.3 | 45.2 | 5.2 | 50.4 | 74.0 | -23.6 | Peak | Horizontal |
| * | 9999.8 | 49.5 | -1.5 | 48.0 | 88.2 | -40.2 | Peak | Vertical |
| | 12485.2 | 47.6 | -0.7 | 46.9 | 74.0 | -27.1 | Peak | Vertical |
| * | 14542.2 | 45.5 | 4.5 | 50.0 | 88.2 | -38.2 | Peak | Vertical |
| | 15703.3 | 44.7 | 6.1 | 50.8 | 74.0 | -23.2 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT20 | Test Channel | 229 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 49.2 | -1.5 | 47.7 | 88.2 | -40.5 | Peak | Horizontal |
| | 11715.1 | 48.6 | -1.7 | 46.9 | 74.0 | -27.1 | Peak | Horizontal |
| | 15912.4 | 45.1 | 5.7 | 50.8 | 74.0 | -23.2 | Peak | Horizontal |
| * | 17218.0 | 44.8 | 8.3 | 53.1 | 88.2 | -35.1 | Peak | Horizontal |
| * | 9999.8 | 49.5 | -1.5 | 48.0 | 88.2 | -40.2 | Peak | Vertical |
| | 11820.5 | 48.2 | -1.7 | 46.5 | 74.0 | -27.5 | Peak | Vertical |
| * | 14610.2 | 45.3 | 4.6 | 49.9 | 88.2 | -38.3 | Peak | Vertical |
| | 15705.0 | 44.7 | 6.1 | 50.8 | 74.0 | -23.2 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 3 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 47.6 | -1.5 | 46.1 | 88.2 | -42.1 | Peak | Horizontal |
| | 11924.2 | 48.9 | -1.9 | 47.0 | 74.0 | -27.0 | Peak | Horizontal |
| * | 14559.2 | 45.0 | 4.6 | 49.6 | 88.2 | -38.6 | Peak | Horizontal |
| | 15706.7 | 44.4 | 6.1 | 50.5 | 74.0 | -23.5 | Peak | Horizontal |
| * | 9999.8 | 49.8 | -1.5 | 48.3 | 88.2 | -39.9 | Peak | Vertical |
| | 11070.8 | 48.0 | -1.5 | 46.5 | 74.0 | -27.5 | Peak | Vertical |
| * | 14552.4 | 45.2 | 4.6 | 49.8 | 88.2 | -38.4 | Peak | Vertical |
| | 15701.6 | 44.7 | 6.0 | 50.7 | 74.0 | -23.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 51 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 50.3 | -1.5 | 48.8 | 88.2 | -39.4 | Peak | Horizontal |
| | 11460.1 | 48.1 | -1.5 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14547.3 | 45.8 | 4.6 | 50.4 | 88.2 | -37.8 | Peak | Horizontal |
| | 15832.5 | 44.8 | 6.0 | 50.8 | 74.0 | -23.2 | Peak | Horizontal |
| * | 9999.8 | 50.2 | -1.5 | 48.7 | 88.2 | -39.5 | Peak | Vertical |
| | 12383.2 | 48.4 | -1.2 | 47.2 | 74.0 | -26.8 | Peak | Vertical |
| * | 14778.5 | 45.9 | 4.5 | 50.4 | 88.2 | -37.8 | Peak | Vertical |
| | 15954.9 | 45.0 | 5.5 | 50.5 | 74.0 | -23.5 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 91 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.5 | -1.5 | 47.0 | 88.2 | -41.2 | Peak | Horizontal |
| | 12339.0 | 48.1 | -0.7 | 47.4 | 74.0 | -26.6 | Peak | Horizontal |
| * | 14778.5 | 45.9 | 4.5 | 50.4 | 88.2 | -37.8 | Peak | Horizontal |
| | 15815.5 | 45.0 | 5.8 | 50.8 | 74.0 | -23.2 | Peak | Horizontal |
| * | 10112.0 | 48.0 | -1.6 | 46.4 | 88.2 | -41.8 | Peak | Vertical |
| | 11225.5 | 48.4 | -1.6 | 46.8 | 74.0 | -27.2 | Peak | Vertical |
| * | 14696.9 | 45.4 | 4.6 | 50.0 | 88.2 | -38.2 | Peak | Vertical |
| | 15701.6 | 44.7 | 6.0 | 50.7 | 74.0 | -23.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 99 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.7 | -1.5 | 47.2 | 88.2 | -41.0 | Peak | Horizontal |
| | 11778.0 | 47.8 | -1.8 | 46.0 | 74.0 | -28.0 | Peak | Horizontal |
| * | 14732.6 | 45.8 | 4.5 | 50.3 | 88.2 | -37.9 | Peak | Horizontal |
| | 15713.5 | 44.7 | 5.8 | 50.5 | 74.0 | -23.5 | Peak | Horizontal |
| | 12468.2 | 47.2 | -0.5 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 14549.0 | 46.1 | 4.6 | 50.7 | 88.2 | -37.5 | Peak | Vertical |
| | 15864.8 | 45.5 | 5.3 | 50.8 | 74.0 | -23.2 | Peak | Vertical |
| * | 17015.7 | 45.6 | 7.9 | 53.5 | 88.2 | -34.7 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 107 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.4 | -1.5 | 46.9 | 88.2 | -41.3 | Peak | Horizontal |
| | 11745.7 | 48.8 | -1.7 | 47.1 | 74.0 | -26.9 | Peak | Horizontal |
| * | 14591.5 | 45.6 | 4.5 | 50.1 | 88.2 | -38.1 | Peak | Horizontal |
| | 15705.0 | 44.9 | 6.1 | 51.0 | 74.0 | -23.0 | Peak | Horizontal |
| * | 9999.8 | 49.8 | -1.5 | 48.3 | 88.2 | -39.9 | Peak | Vertical |
| | 12458.0 | 47.6 | -0.6 | 47.0 | 74.0 | -27.0 | Peak | Vertical |
| * | 14773.4 | 45.2 | 4.7 | 49.9 | 88.2 | -38.3 | Peak | Vertical |
| | 15689.7 | 45.0 | 5.6 | 50.6 | 74.0 | -23.4 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 115 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 10127.3 | 48.1 | -1.5 | 46.6 | 88.2 | -41.6 | Peak | Horizontal |
| | 12039.8 | 48.5 | -1.6 | 46.9 | 74.0 | -27.1 | Peak | Horizontal |
| * | 14734.3 | 45.5 | 4.5 | 50.0 | 88.2 | -38.2 | Peak | Horizontal |
| | 15693.1 | 45.1 | 5.7 | 50.8 | 74.0 | -23.2 | Peak | Horizontal |
| * | 9999.8 | 47.6 | -1.5 | 46.1 | 88.2 | -42.1 | Peak | Vertical |
| | 12121.4 | 48.3 | -1.7 | 46.6 | 74.0 | -27.4 | Peak | Vertical |
| * | 14863.5 | 45.5 | 4.7 | 50.2 | 88.2 | -38.0 | Peak | Vertical |
| | 15553.7 | 46.0 | 4.6 | 50.6 | 74.0 | -23.4 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 123 |
| Test Date | 2023-04-15 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 10071.2 | 47.1 | -1.3 | 45.8 | 88.2 | -42.4 | Peak | Horizontal |
| | 12578.7 | 47.0 | -0.8 | 46.2 | 74.0 | -27.8 | Peak | Horizontal |
| * | 14827.8 | 46.1 | 4.2 | 50.3 | 88.2 | -37.9 | Peak | Horizontal |
| | 15919.2 | 44.8 | 5.8 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| * | 9999.8 | 48.6 | -1.5 | 47.1 | 88.2 | -41.1 | Peak | Vertical |
| | 12537.9 | 47.5 | -1.0 | 46.5 | 74.0 | -27.5 | Peak | Vertical |
| * | 14761.5 | 44.7 | 4.5 | 49.2 | 88.2 | -39.0 | Peak | Vertical |
| | 15703.3 | 44.2 | 6.1 | 50.3 | 74.0 | -23.7 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 147 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 49.5 | -1.5 | 48.0 | 88.2 | -40.2 | Peak | Horizontal |
| | 12240.4 | 48.1 | -1.3 | 46.8 | 74.0 | -27.2 | Peak | Horizontal |
| | 15546.9 | 45.1 | 4.8 | 49.9 | 74.0 | -24.1 | Peak | Horizontal |
| * | 17114.3 | 44.8 | 8.1 | 52.9 | 88.2 | -35.3 | Peak | Horizontal |
| * | 9999.8 | 49.1 | -1.5 | 47.6 | 88.2 | -40.6 | Peak | Vertical |
| | 11587.6 | 47.6 | -1.4 | 46.2 | 74.0 | -27.8 | Peak | Vertical |
| | 14715.6 | 44.7 | 4.5 | 49.2 | 88.2 | -39.0 | Peak | Vertical |
| * | 15834.2 | 44.1 | 6.0 | 50.1 | 74.0 | -23.9 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 179 |
| Test Date | 2023-04-15 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.9 | -1.5 | 47.4 | 88.2 | -40.8 | Peak | Horizontal |
| | 12344.1 | 47.4 | -0.8 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14873.7 | 45.2 | 4.6 | 49.8 | 88.2 | -38.4 | Peak | Horizontal |
| | 15839.3 | 44.3 | 6.0 | 50.3 | 74.0 | -23.7 | Peak | Horizontal |
| * | 9999.8 | 49.0 | -1.5 | 47.5 | 88.2 | -40.7 | Peak | Vertical |
| | 11767.8 | 48.2 | -1.9 | 46.3 | 74.0 | -27.7 | Peak | Vertical |
| * | 14909.4 | 45.4 | 4.3 | 49.7 | 88.2 | -38.5 | Peak | Vertical |
| | 15737.3 | 45.4 | 5.4 | 50.8 | 74.0 | -23.2 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 187 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 49.2 | -1.5 | 47.7 | 88.2 | -40.5 | Peak | Horizontal |
| | 11509.4 | 48.1 | -1.5 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14702.0 | 45.8 | 4.7 | 50.5 | 88.2 | -37.7 | Peak | Horizontal |
| | 15937.9 | 44.9 | 5.6 | 50.5 | 74.0 | -23.5 | Peak | Horizontal |
| * | 9999.8 | 48.8 | -1.5 | 47.3 | 88.2 | -40.9 | Peak | Vertical |
| | 12492.0 | 47.3 | -1.0 | 46.3 | 74.0 | -27.7 | Peak | Vertical |
| * | 14617.0 | 44.6 | 4.6 | 49.2 | 88.2 | -39.0 | Peak | Vertical |
| | 15713.5 | 44.1 | 5.8 | 49.9 | 74.0 | -24.1 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 195 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 48.5 | -1.5 | 47.0 | 88.2 | -41.2 | Peak | Horizontal |
| | 12214.9 | 47.8 | -1.5 | 46.3 | 74.0 | -27.7 | Peak | Horizontal |
| * | 14566.0 | 45.2 | 4.7 | 49.9 | 88.2 | -38.3 | Peak | Horizontal |
| | 15708.4 | 44.3 | 6.0 | 50.3 | 74.0 | -23.7 | Peak | Horizontal |
| * | 9999.8 | 49.1 | -1.5 | 47.6 | 88.2 | -40.6 | Peak | Vertical |
| | 11142.2 | 47.8 | -1.3 | 46.5 | 74.0 | -27.5 | Peak | Vertical |
| * | 14508.2 | 44.9 | 4.4 | 49.3 | 88.2 | -38.9 | Peak | Vertical |
| | 15943.0 | 44.9 | 5.5 | 50.4 | 74.0 | -23.6 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 211 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 49.1 | -1.5 | 47.6 | 88.2 | -40.6 | Peak | Horizontal |
| | 11142.2 | 47.8 | -1.3 | 46.5 | 74.0 | -27.5 | Peak | Horizontal |
| * | 14606.8 | 45.4 | 4.6 | 50.0 | 88.2 | -38.2 | Peak | Horizontal |
| | 15943.0 | 44.9 | 5.5 | 50.4 | 74.0 | -23.6 | Peak | Horizontal |
| * | 9999.8 | 49.4 | -1.5 | 47.9 | 88.2 | -40.3 | Peak | Vertical |
| | 11327.5 | 48.3 | -1.7 | 46.6 | 74.0 | -27.4 | Peak | Vertical |
| * | 14567.7 | 45.1 | 4.7 | 49.8 | 88.2 | -38.4 | Peak | Vertical |
| | 15932.8 | 44.8 | 5.7 | 50.5 | 74.0 | -23.5 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT40 | Test Channel | 227 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 49.1 | -1.5 | 47.6 | 88.2 | -40.6 | Peak | Horizontal |
| | 11982.0 | 48.3 | -1.9 | 46.4 | 74.0 | -27.6 | Peak | Horizontal |
| * | 14518.4 | 45.3 | 4.4 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15705.0 | 43.9 | 6.1 | 50.0 | 74.0 | -24.0 | Peak | Horizontal |
| * | 9999.8 | 49.8 | -1.5 | 48.3 | 88.2 | -39.9 | Peak | Vertical |
| | 12231.9 | 47.5 | -1.4 | 46.1 | 74.0 | -27.9 | Peak | Vertical |
| * | 14557.5 | 44.6 | 4.6 | 49.2 | 88.2 | -39.0 | Peak | Vertical |
| | 15691.4 | 44.0 | 5.7 | 49.7 | 74.0 | -24.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 7 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.5 | -1.5 | 52.0 | 88.2 | -36.2 | Peak | Horizontal |
| | 11965.0 | 49.1 | -1.6 | 47.5 | 74.0 | -26.5 | Peak | Horizontal |
| * | 14511.6 | 45.9 | 4.4 | 50.3 | 88.2 | -37.9 | Peak | Horizontal |
| | 15793.4 | 45.5 | 5.6 | 51.1 | 74.0 | -22.9 | Peak | Horizontal |
| * | 9999.8 | 53.5 | -1.5 | 52.0 | 88.2 | -36.2 | Peak | Vertical |
| | 11563.8 | 48.1 | -1.3 | 46.8 | 74.0 | -27.2 | Peak | Vertical |
| * | 13729.6 | 47.1 | 2.1 | 49.2 | 88.2 | -39.0 | Peak | Vertical |
| | 15994.0 | 45.1 | 5.7 | 50.8 | 74.0 | -23.2 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 55 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.1 | -1.5 | 51.6 | 88.2 | -36.6 | Peak | Horizontal |
| | 12447.8 | 48.6 | -0.9 | 47.7 | 74.0 | -26.3 | Peak | Horizontal |
| * | 14545.6 | 45.6 | 4.5 | 50.1 | 88.2 | -38.1 | Peak | Horizontal |
| | 15842.7 | 44.7 | 5.9 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| * | 9999.8 | 53.3 | -1.5 | 51.8 | 88.2 | -36.4 | Peak | Vertical |
| | 12478.4 | 47.4 | -0.5 | 46.9 | 74.0 | -27.1 | Peak | Vertical |
| * | 14630.6 | 45.8 | 4.6 | 50.4 | 88.2 | -37.8 | Peak | Vertical |
| | 15822.3 | 44.8 | 6.0 | 50.8 | 74.0 | -23.2 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 87 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.5 | -1.5 | 52.0 | 88.2 | -36.2 | Peak | Horizontal |
| | 12461.4 | 47.8 | -0.6 | 47.2 | 74.0 | -26.8 | Peak | Horizontal |
| * | 14538.8 | 45.3 | 4.4 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15778.1 | 45.8 | 5.3 | 51.1 | 74.0 | -22.9 | Peak | Horizontal |
| * | 9999.8 | 54.1 | -1.5 | 52.6 | 88.2 | -35.6 | Peak | Vertical |
| | 12422.3 | 47.7 | -0.8 | 46.9 | 74.0 | -27.1 | Peak | Vertical |
| * | 14611.9 | 45.4 | 4.6 | 50.0 | 88.2 | -38.2 | Peak | Vertical |
| | 15740.7 | 46.1 | 5.3 | 51.4 | 74.0 | -22.6 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 103 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.4 | -1.5 | 51.9 | 88.2 | -36.3 | Peak | Horizontal |
| | 12026.2 | 48.9 | -1.6 | 47.3 | 74.0 | -26.7 | Peak | Horizontal |
| * | 14321.2 | 46.9 | 2.9 | 49.8 | 88.2 | -38.4 | Peak | Horizontal |
| | 15830.8 | 45.1 | 6.0 | 51.1 | 74.0 | -22.9 | Peak | Horizontal |
| * | 9999.8 | 53.5 | -1.5 | 52.0 | 88.2 | -36.2 | Peak | Vertical |
| | 12553.2 | 47.4 | -0.7 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 14511.6 | 45.5 | 4.4 | 49.9 | 88.2 | -38.3 | Peak | Vertical |
| | 15701.6 | 45.1 | 6.0 | 51.1 | 74.0 | -22.9 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 119 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.4 | -1.5 | 50.9 | 88.2 | -37.3 | Peak | Horizontal |
| | 11659.0 | 47.8 | -1.5 | 46.3 | 74.0 | -27.7 | Peak | Horizontal |
| * | 14892.4 | 45.2 | 4.1 | 49.3 | 88.2 | -38.9 | Peak | Horizontal |
| | 15732.2 | 45.2 | 5.4 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| * | 9999.8 | 53.2 | -1.5 | 51.7 | 88.2 | -36.5 | Peak | Vertical |
| | 11579.1 | 48.3 | -1.3 | 47.0 | 74.0 | -27.0 | Peak | Vertical |
| * | 14513.3 | 45.1 | 4.4 | 49.5 | 88.2 | -38.7 | Peak | Vertical |
| | 15693.1 | 45.1 | 5.7 | 50.8 | 74.0 | -23.2 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 135 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.0 | -1.5 | 50.5 | 88.2 | -37.7 | Peak | Horizontal |
| | 11796.7 | 48.1 | -1.6 | 46.5 | 74.0 | -27.5 | Peak | Horizontal |
| * | 14542.2 | 45.7 | 4.5 | 50.2 | 88.2 | -38.0 | Peak | Horizontal |
| | 15832.5 | 45.3 | 6.0 | 51.3 | 74.0 | -22.7 | Peak | Horizontal |
| * | 9999.8 | 53.7 | -1.5 | 52.2 | 88.2 | -36.0 | Peak | Vertical |
| | 12102.7 | 48.8 | -1.5 | 47.3 | 74.0 | -26.7 | Peak | Vertical |
| * | 14588.1 | 44.8 | 4.5 | 49.3 | 88.2 | -38.9 | Peak | Vertical |
| | 15858.0 | 45.3 | 5.6 | 50.9 | 74.0 | -23.1 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 151 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 8381.4 | 51.0 | -3.5 | 47.5 | 74.0 | -26.5 | Peak | Horizontal |
| * | 9999.8 | 53.1 | -1.5 | 51.6 | 88.2 | -36.6 | Peak | Horizontal |
| * | 14839.7 | 45.1 | 4.3 | 49.4 | 88.2 | -38.8 | Peak | Horizontal |
| | 15824.0 | 44.8 | 6.0 | 50.8 | 74.0 | -23.2 | Peak | Horizontal |
| * | 9999.8 | 53.1 | -1.5 | 51.6 | 88.2 | -36.6 | Peak | Vertical |
| | 11463.5 | 48.0 | -1.6 | 46.4 | 74.0 | -27.6 | Peak | Vertical |
| * | 14584.7 | 45.0 | 4.5 | 49.5 | 88.2 | -38.7 | Peak | Vertical |
| | 15822.3 | 44.6 | 6.0 | 50.6 | 74.0 | -23.4 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 167 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.9 | -1.5 | 51.4 | 88.2 | -36.8 | Peak | Horizontal |
| | 11669.2 | 48.3 | -1.5 | 46.8 | 74.0 | -27.2 | Peak | Horizontal |
| * | 14917.9 | 45.3 | 4.4 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15839.3 | 45.4 | 6.0 | 51.4 | 74.0 | -22.6 | Peak | Horizontal |
| * | 9999.8 | 54.3 | -1.5 | 52.8 | 88.2 | -35.4 | Peak | Vertical |
| | 11359.8 | 48.4 | -1.4 | 47.0 | 74.0 | -27.0 | Peak | Vertical |
| * | 14751.3 | 45.8 | 4.3 | 50.1 | 88.2 | -38.1 | Peak | Vertical |
| | 15708.4 | 45.0 | 6.0 | 51.0 | 74.0 | -23.0 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 183 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.7 | -1.5 | 51.2 | 88.2 | -37.0 | Peak | Horizontal |
| | 11455.0 | 48.2 | -1.4 | 46.8 | 74.0 | -27.2 | Peak | Horizontal |
| * | 13731.3 | 46.7 | 2.1 | 48.8 | 88.2 | -39.4 | Peak | Horizontal |
| | 15832.5 | 44.5 | 6.0 | 50.5 | 74.0 | -23.5 | Peak | Horizontal |
| * | 9999.8 | 53.3 | -1.5 | 51.8 | 88.2 | -36.4 | Peak | Vertical |
| | 11441.4 | 48.3 | -1.4 | 46.9 | 74.0 | -27.1 | Peak | Vertical |
| * | 14351.8 | 45.9 | 3.4 | 49.3 | 88.2 | -38.9 | Peak | Vertical |
| | 15706.7 | 44.6 | 6.1 | 50.7 | 74.0 | -23.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 199 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.9 | -1.5 | 51.4 | 88.2 | -36.8 | Peak | Horizontal |
| | 11655.6 | 49.1 | -1.5 | 47.6 | 74.0 | -26.4 | Peak | Horizontal |
| * | 14600.0 | 45.0 | 4.6 | 49.6 | 88.2 | -38.6 | Peak | Horizontal |
| | 15842.7 | 45.5 | 5.9 | 51.4 | 74.0 | -22.6 | Peak | Horizontal |
| * | 9999.8 | 53.6 | -1.5 | 52.1 | 88.2 | -36.1 | Peak | Vertical |
| | 12611.0 | 47.9 | -0.9 | 47.0 | 74.0 | -27.0 | Peak | Vertical |
| * | 13733.0 | 47.0 | 2.1 | 49.1 | 88.2 | -39.1 | Peak | Vertical |
| | 15791.7 | 45.3 | 5.6 | 50.9 | 74.0 | -23.1 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT80 | Test Channel | 215 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.9 | -1.5 | 52.4 | 88.2 | -35.8 | Peak | Horizontal |
| | 12471.6 | 47.5 | -0.5 | 47.0 | 74.0 | -27.0 | Peak | Horizontal |
| * | 14586.4 | 45.6 | 4.5 | 50.1 | 88.2 | -38.1 | Peak | Horizontal |
| | 15703.3 | 45.5 | 6.1 | 51.6 | 74.0 | -22.4 | Peak | Horizontal |
| * | 9999.8 | 53.6 | -1.5 | 52.1 | 88.2 | -36.1 | Peak | Vertical |
| | 11585.9 | 48.0 | -1.4 | 46.6 | 74.0 | -27.4 | Peak | Vertical |
| * | 14640.8 | 46.0 | 4.5 | 50.5 | 88.2 | -37.7 | Peak | Vertical |
| | 15861.4 | 45.6 | 5.5 | 51.1 | 74.0 | -22.9 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT160 | Test Channel | 15 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.2 | -1.5 | 51.7 | 88.2 | -36.5 | Peak | Horizontal |
| | 12033.0 | 50.1 | -1.5 | 48.6 | 74.0 | -25.4 | Peak | Horizontal |
| * | 13901.3 | 47.4 | 2.2 | 49.6 | 88.2 | -38.6 | Peak | Horizontal |
| | 15703.3 | 45.2 | 6.1 | 51.3 | 74.0 | -22.7 | Peak | Horizontal |
| * | 9999.8 | 53.7 | -1.5 | 52.2 | 88.2 | -36.0 | Peak | Vertical |
| | 12038.1 | 50.3 | -1.6 | 48.7 | 74.0 | -25.3 | Peak | Vertical |
| * | 14547.3 | 46.4 | 4.6 | 51.0 | 88.2 | -37.2 | Peak | Vertical |
| | 15696.5 | 44.7 | 5.9 | 50.6 | 74.0 | -23.4 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT160 | Test Channel | 47 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.1 | -1.5 | 51.6 | 88.2 | -36.6 | Peak | Horizontal |
| | 12335.6 | 49.1 | -0.8 | 48.3 | 74.0 | -25.7 | Peak | Horizontal |
| * | 14547.3 | 45.3 | 4.6 | 49.9 | 88.2 | -38.3 | Peak | Horizontal |
| | 15715.2 | 45.7 | 5.7 | 51.4 | 74.0 | -22.6 | Peak | Horizontal |
| * | 9999.8 | 53.3 | -1.5 | 51.8 | 88.2 | -36.4 | Peak | Vertical |
| | 12350.9 | 49.0 | -0.9 | 48.1 | 74.0 | -25.9 | Peak | Vertical |
| * | 14530.3 | 45.8 | 4.3 | 50.1 | 88.2 | -38.1 | Peak | Vertical |
| | 15854.6 | 45.5 | 5.7 | 51.2 | 74.0 | -22.8 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT160 | Test Channel | 79 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.8 | -1.5 | 51.3 | 88.2 | -36.9 | Peak | Horizontal |
| | 12490.3 | 48.0 | -0.9 | 47.1 | 74.0 | -26.9 | Peak | Horizontal |
| * | 14938.3 | 45.1 | 4.3 | 49.4 | 88.2 | -38.8 | Peak | Horizontal |
| | 15715.2 | 44.9 | 5.7 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| * | 9999.8 | 53.5 | -1.5 | 52.0 | 88.2 | -36.2 | Peak | Vertical |
| | 12573.6 | 47.8 | -0.8 | 47.0 | 74.0 | -27.0 | Peak | Vertical |
| * | 14586.4 | 45.2 | 4.5 | 49.7 | 88.2 | -38.5 | Peak | Vertical |
| | 15609.8 | 45.7 | 5.4 | 51.1 | 74.0 | -22.9 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT160 | Test Channel | 111 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.2 | -1.5 | 51.7 | 88.2 | -36.5 | Peak | Horizontal |
| | 11268.0 | 48.3 | -1.4 | 46.9 | 74.0 | -27.1 | Peak | Horizontal |
| * | 13724.5 | 47.5 | 2.1 | 49.6 | 88.2 | -38.6 | Peak | Horizontal |
| | 15608.1 | 45.7 | 5.4 | 51.1 | 74.0 | -22.9 | Peak | Horizontal |
| * | 9999.8 | 53.5 | -1.5 | 52.0 | 88.2 | -36.2 | Peak | Vertical |
| | 11444.8 | 48.1 | -1.4 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 14559.2 | 45.7 | 4.6 | 50.3 | 88.2 | -37.9 | Peak | Vertical |
| | 15841.0 | 44.8 | 6.0 | 50.8 | 74.0 | -23.2 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT160 | Test Channel | 143 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.0 | -1.5 | 51.5 | 88.2 | -36.7 | Peak | Horizontal |
| | 11546.8 | 48.1 | -1.5 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14390.9 | 45.7 | 3.6 | 49.3 | 88.2 | -38.9 | Peak | Horizontal |
| | 15722.0 | 45.6 | 5.5 | 51.1 | 74.0 | -22.9 | Peak | Horizontal |
| * | 9999.8 | 53.6 | -1.5 | 52.1 | 88.2 | -36.1 | Peak | Vertical |
| | 11779.7 | 48.8 | -1.7 | 47.1 | 74.0 | -26.9 | Peak | Vertical |
| * | 14523.5 | 45.6 | 4.4 | 50.0 | 88.2 | -38.2 | Peak | Vertical |
| | 15784.9 | 45.3 | 5.5 | 50.8 | 74.0 | -23.2 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT160 | Test Channel | 175 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.6 | -1.5 | 51.1 | 88.2 | -37.1 | Peak | Horizontal |
| | 12255.7 | 47.7 | -1.0 | 46.7 | 74.0 | -27.3 | Peak | Horizontal |
| | 15767.9 | 46.2 | 5.1 | 51.3 | 74.0 | -22.7 | Peak | Horizontal |
| * | 17119.4 | 45.0 | 8.1 | 53.1 | 88.2 | -35.1 | Peak | Horizontal |
| * | 9999.8 | 54.6 | -1.5 | 53.1 | 88.2 | -35.1 | Peak | Vertical |
| | 12425.7 | 47.1 | -0.8 | 46.3 | 74.0 | -27.7 | Peak | Vertical |
| * | 14928.1 | 45.7 | 4.4 | 50.1 | 88.2 | -38.1 | Peak | Vertical |
| | 15701.6 | 45.2 | 6.0 | 51.2 | 74.0 | -22.8 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT160 | Test Channel | 207 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.1 | -1.5 | 50.6 | 88.2 | -37.6 | Peak | Horizontal |
| | 12427.4 | 47.8 | -0.8 | 47.0 | 74.0 | -27.0 | Peak | Horizontal |
| * | 14525.2 | 45.2 | 4.4 | 49.6 | 88.2 | -38.6 | Peak | Horizontal |
| | 15703.3 | 44.3 | 6.1 | 50.4 | 74.0 | -23.6 | Peak | Horizontal |
| * | 9999.8 | 53.4 | -1.5 | 51.9 | 88.2 | -36.3 | Peak | Vertical |
| | 11570.6 | 48.6 | -1.3 | 47.3 | 74.0 | -26.7 | Peak | Vertical |
| * | 14953.6 | 45.4 | 4.4 | 49.8 | 88.2 | -38.4 | Peak | Vertical |
| | 15903.9 | 45.3 | 5.4 | 50.7 | 74.0 | -23.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT320-1 | Test Channel | 31 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.7 | -1.5 | 51.2 | 88.2 | -37.0 | Peak | Horizontal |
| | 12106.1 | 51.5 | -1.6 | 49.9 | 74.0 | -24.1 | Peak | Horizontal |
| * | 14537.1 | 45.3 | 4.4 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15776.4 | 45.6 | 5.3 | 50.9 | 74.0 | -23.1 | Peak | Horizontal |
| * | 9999.8 | 53.5 | -1.5 | 52.0 | 88.2 | -36.2 | Peak | Vertical |
| | 12259.1 | 49.5 | -1.0 | 48.5 | 74.0 | -25.5 | Peak | Vertical |
| * | 14943.4 | 45.4 | 4.3 | 49.7 | 88.2 | -38.5 | Peak | Vertical |
| | 15812.1 | 45.2 | 5.7 | 50.9 | 74.0 | -23.1 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT320-1 | Test Channel | 95 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.5 | -1.5 | 52.0 | 88.2 | -36.2 | Peak | Horizontal |
| | 12480.1 | 47.6 | -0.6 | 47.0 | 74.0 | -27.0 | Peak | Horizontal |
| * | 14535.4 | 45.2 | 4.4 | 49.6 | 88.2 | -38.6 | Peak | Horizontal |
| | 15705.0 | 45.1 | 6.1 | 51.2 | 74.0 | -22.8 | Peak | Horizontal |
| * | 9999.8 | 53.7 | -1.5 | 52.2 | 88.2 | -36.0 | Peak | Vertical |
| | 12464.8 | 47.3 | -0.5 | 46.8 | 74.0 | -27.2 | Peak | Vertical |
| * | 14545.6 | 45.0 | 4.5 | 49.5 | 88.2 | -38.7 | Peak | Vertical |
| | 15827.4 | 44.7 | 6.0 | 50.7 | 74.0 | -23.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT320-1 | Test Channel | 159 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 8430.7 | 51.0 | -3.0 | 48.0 | 74.0 | -26.0 | Peak | Horizontal |
| * | 9999.8 | 52.5 | -1.5 | 51.0 | 88.2 | -37.2 | Peak | Horizontal |
| * | 14523.5 | 45.3 | 4.4 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15791.7 | 45.7 | 5.6 | 51.3 | 74.0 | -22.7 | Peak | Horizontal |
| * | 9999.8 | 53.8 | -1.5 | 52.3 | 88.2 | -35.9 | Peak | Vertical |
| | 10941.6 | 48.6 | -1.6 | 47.0 | 74.0 | -27.0 | Peak | Vertical |
| * | 14557.5 | 45.1 | 4.6 | 49.7 | 88.2 | -38.5 | Peak | Vertical |
| | 15847.8 | 45.5 | 5.8 | 51.3 | 74.0 | -22.7 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT320-2 | Test Channel | 63 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 8354.2 | 50.4 | -3.3 | 47.1 | 74.0 | -26.9 | Peak | Horizontal |
| * | 9999.8 | 52.9 | -1.5 | 51.4 | 88.2 | -36.8 | Peak | Horizontal |
| | 12087.4 | 48.8 | -1.6 | 47.2 | 74.0 | -26.8 | Peak | Horizontal |
| * | 14817.6 | 46.0 | 4.2 | 50.2 | 88.2 | -38.0 | Peak | Horizontal |
| * | 9999.8 | 53.8 | -1.5 | 52.3 | 88.2 | -35.9 | Peak | Vertical |
| | 12398.5 | 49.4 | -1.2 | 48.2 | 74.0 | -25.8 | Peak | Vertical |
| * | 14948.5 | 45.5 | 4.4 | 49.9 | 88.2 | -38.3 | Peak | Vertical |
| | 15778.1 | 45.0 | 5.3 | 50.3 | 74.0 | -23.7 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT320-2 | Test Channel | 127 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 53.8 | -1.5 | 52.3 | 88.2 | -35.9 | Peak | Horizontal |
| | 12429.1 | 47.2 | -0.9 | 46.3 | 74.0 | -27.7 | Peak | Horizontal |
| * | 13721.1 | 47.3 | 2.0 | 49.3 | 88.2 | -38.9 | Peak | Horizontal |
| | 15705.0 | 44.8 | 6.1 | 50.9 | 74.0 | -23.1 | Peak | Horizontal |
| * | 9999.8 | 53.9 | -1.5 | 52.4 | 88.2 | -35.8 | Peak | Vertical |
| | 12174.1 | 48.0 | -1.4 | 46.6 | 74.0 | -27.4 | Peak | Vertical |
| * | 14516.7 | 45.7 | 4.4 | 50.1 | 88.2 | -38.1 | Peak | Vertical |
| | 15808.7 | 45.0 | 5.6 | 50.6 | 74.0 | -23.4 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Site | SIP-AC3 | Test Engineer | Mero Zhou |
| Test Mode | 802.11be-EHT320-2 | Test Channel | 191 |
| Test Date | 2025-04-18 | | |
| Remark | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBuV) | Factor (dB/m) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| * | 9999.8 | 52.8 | -1.5 | 51.3 | 88.2 | -36.9 | Peak | Horizontal |
| | 12260.8 | 47.6 | -1.0 | 46.6 | 74.0 | -27.4 | Peak | Horizontal |
| * | 14547.3 | 45.1 | 4.6 | 49.7 | 88.2 | -38.5 | Peak | Horizontal |
| | 15907.3 | 45.0 | 5.6 | 50.6 | 74.0 | -23.4 | Peak | Horizontal |
| | 9421.8 | 48.3 | -2.1 | 46.2 | 74.0 | -27.8 | Peak | Vertical |
| * | 9999.8 | 53.4 | -1.5 | 51.9 | 88.2 | -36.3 | Peak | Vertical |
| | 11633.5 | 48.1 | -1.5 | 46.6 | 74.0 | -27.4 | Peak | Vertical |
| * | 17139.8 | 44.9 | 8.0 | 52.9 | 88.2 | -35.3 | Peak | Vertical |

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-23 |
| Temperature | 16.7 °C | Humidity | 36.5 % |
| Limit | FCC_Part15.209_RSE(3m) | Test Engineer | Mero Zhou |
| Factor | VULB 9168_00997 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6265MHz | | |

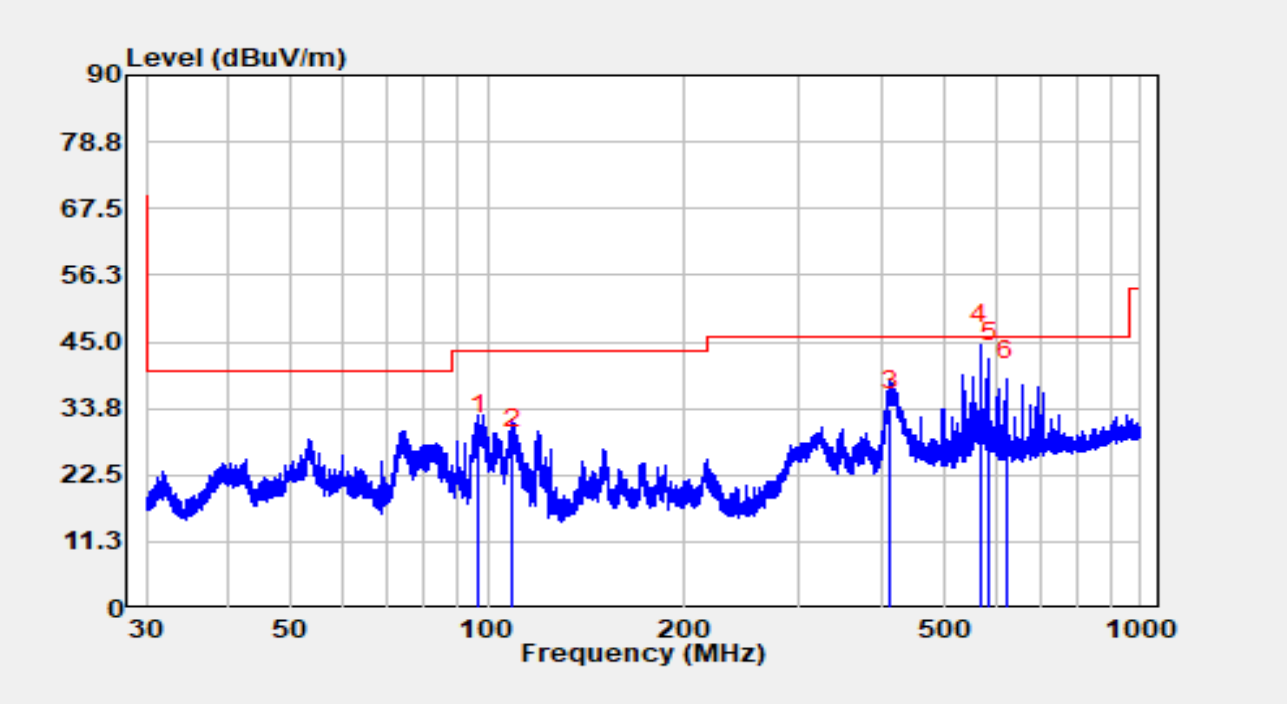


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 96.809 | 15.80 | 13.41 | 29.21 | -14.29 | 43.50 | QP |
| 2 | | 108.990 | 11.90 | 15.23 | 27.13 | -16.37 | 43.50 | QP |
| 3 | | 414.432 | 12.40 | 21.19 | 33.59 | -12.41 | 46.00 | QP |
| 4 | * | 568.812 | 20.00 | 24.69 | 44.69 | -1.31 | 46.00 | QP |
| 5 | | 586.432 | 16.30 | 25.23 | 41.53 | -4.47 | 46.00 | QP |
| 6 | | 622.453 | 12.50 | 26.19 | 38.69 | -7.31 | 46.00 | QP |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-23 |
| Temperature | 16.7 °C | Humidity | 36.5 % |
| Limit | FCC_Part15.209_RSE(3m) | Test Engineer | Mero Zhou |
| Factor | VULB 9168_00997 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6265MHz | | |

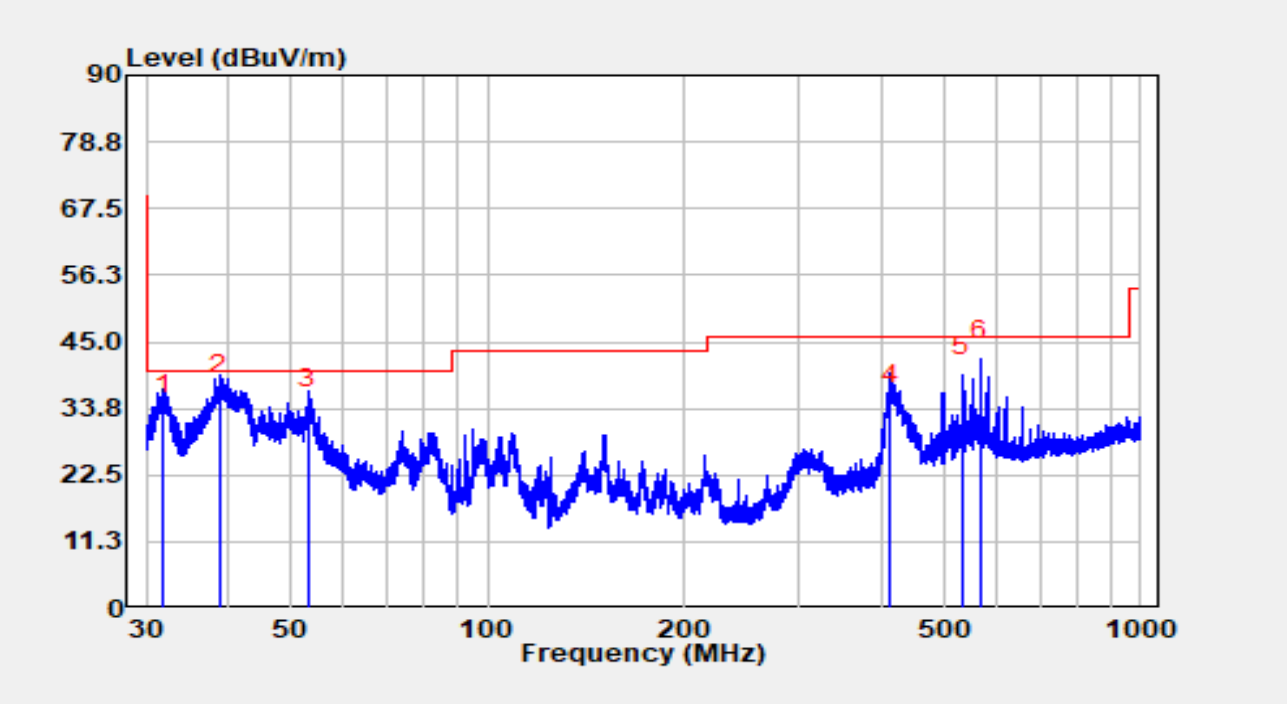


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 31.910 | 15.98 | 16.96 | 32.94 | -7.06 | 40.00 | QP |
| 2 | * | 38.847 | 18.30 | 17.90 | 36.20 | -3.80 | 40.00 | QP |
| 3 | | 53.038 | 15.10 | 18.59 | 33.69 | -6.31 | 40.00 | QP |
| 4 | | 413.561 | 13.40 | 21.17 | 34.57 | -11.43 | 46.00 | QP |
| 5 | | 533.645 | 15.40 | 23.96 | 39.36 | -6.64 | 46.00 | QP |
| 6 | | 568.812 | 17.10 | 24.69 | 41.79 | -4.21 | 46.00 | QP |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

### A.9 Radiated Restricted Band Edge Test Result

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11a at 5955MHz | | |

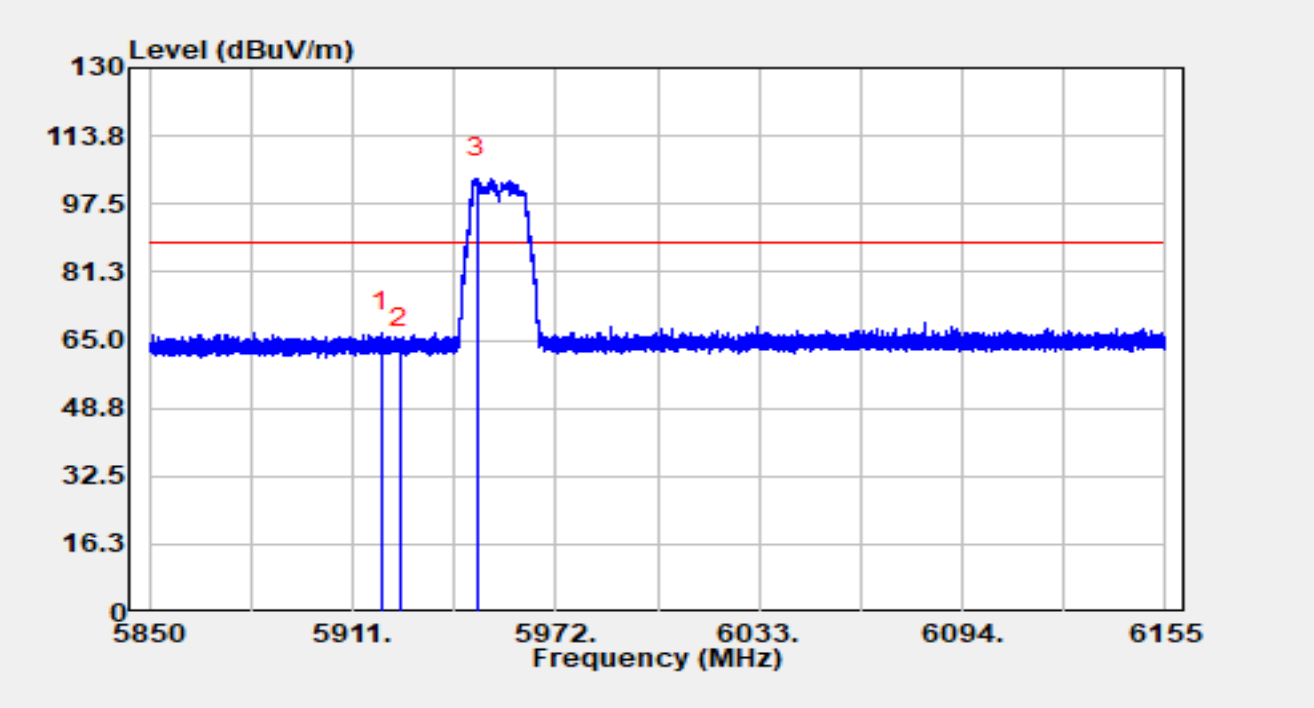


| No | Mark | Frequency (MHz) | Reading (dBµV) | C.F (dB/m) | Measurement (dBµV/m) | Margin (dB) | Limit (dBµV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5919.509 | 26.05 | 40.69 | 66.74 | -21.46 | 88.20 | Peak |
| 2 | | 5925.000 | 22.29 | 40.76 | 63.05 | -25.15 | 88.20 | Peak |
| 3 | | 5948.393 | 62.95 | 40.72 | 103.67 | N/A | N/A | Peak |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBµV/m) = Reading (dBµV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11a at 5955MHz | | |

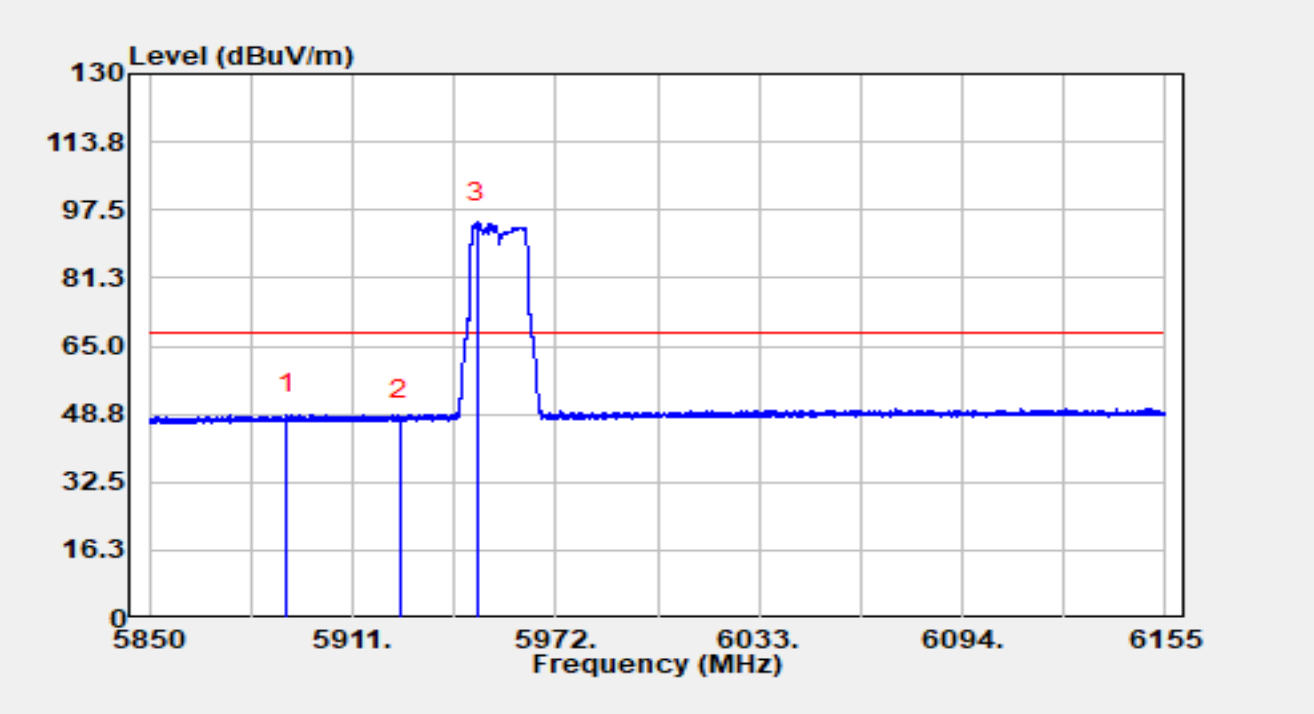


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5891.145 | 8.11 | 40.64 | 48.75 | -19.45 | 68.20 | Average |
| 2 | | 5925.000 | 6.72 | 40.76 | 47.48 | -20.72 | 68.20 | Average |
| 3 | | 5948.271 | 53.80 | 40.72 | 94.51 | N/A | N/A | Average |

Notes:

1. “ * “, means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11a at 5955MHz | | |

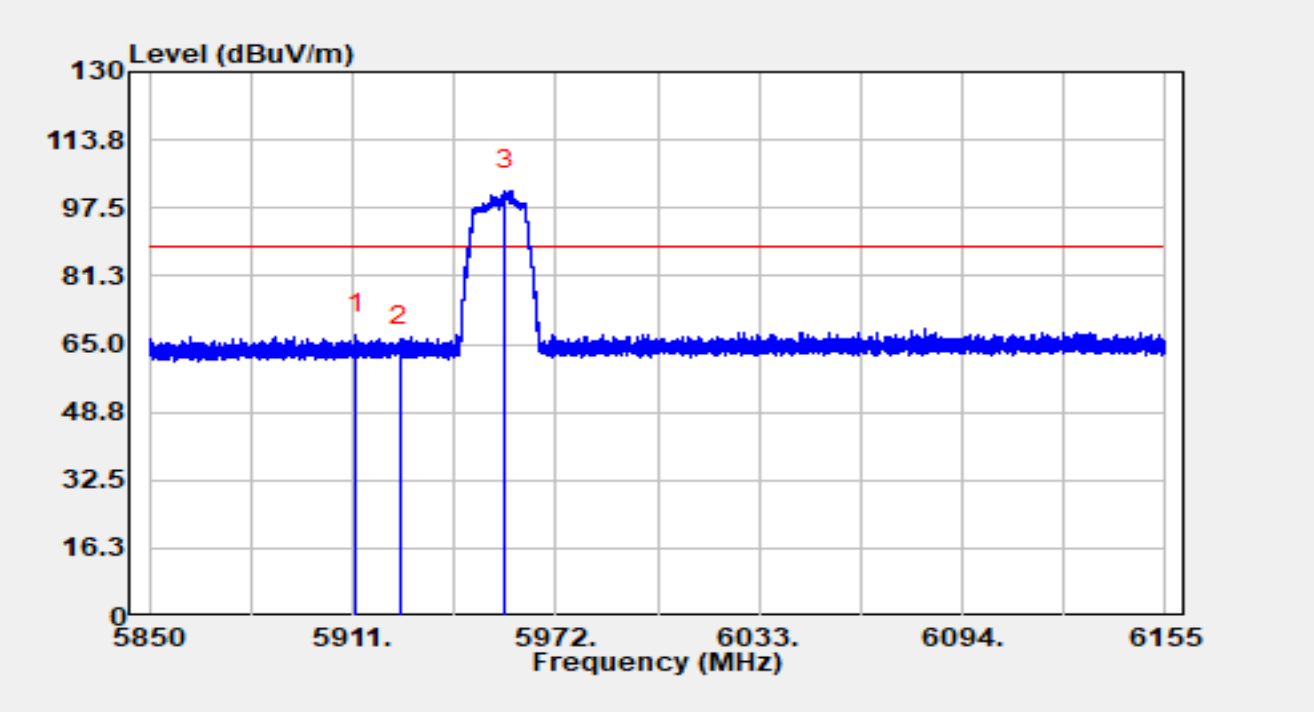


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5911.915 | 26.66 | 40.61 | 67.27 | -20.93 | 88.20 | Peak |
| 2 | | 5925.000 | 23.69 | 40.76 | 64.45 | -23.75 | 88.20 | Peak |
| 3 | | 5956.750 | 60.94 | 40.81 | 101.75 | N/A | N/A | Peak |

Notes:

1. “ * “, means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11a at 5955MHz | | |

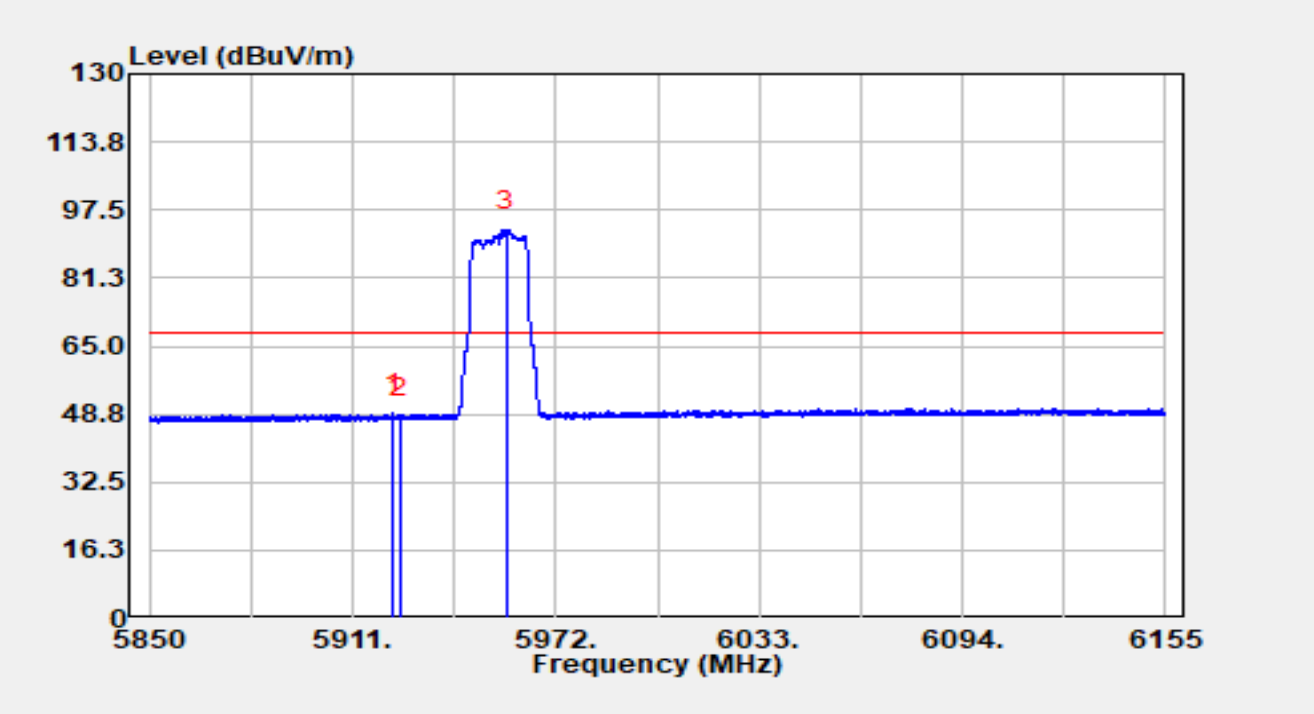


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5923.169 | 8.10 | 40.73 | 48.83 | -19.37 | 68.20 | Average |
| 2 | | 5925.000 | 6.91 | 40.76 | 47.66 | -20.54 | 68.20 | Average |
| 3 | | 5957.330 | 51.89 | 40.82 | 92.71 | N/A | N/A | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11a at 7095MHz | | |

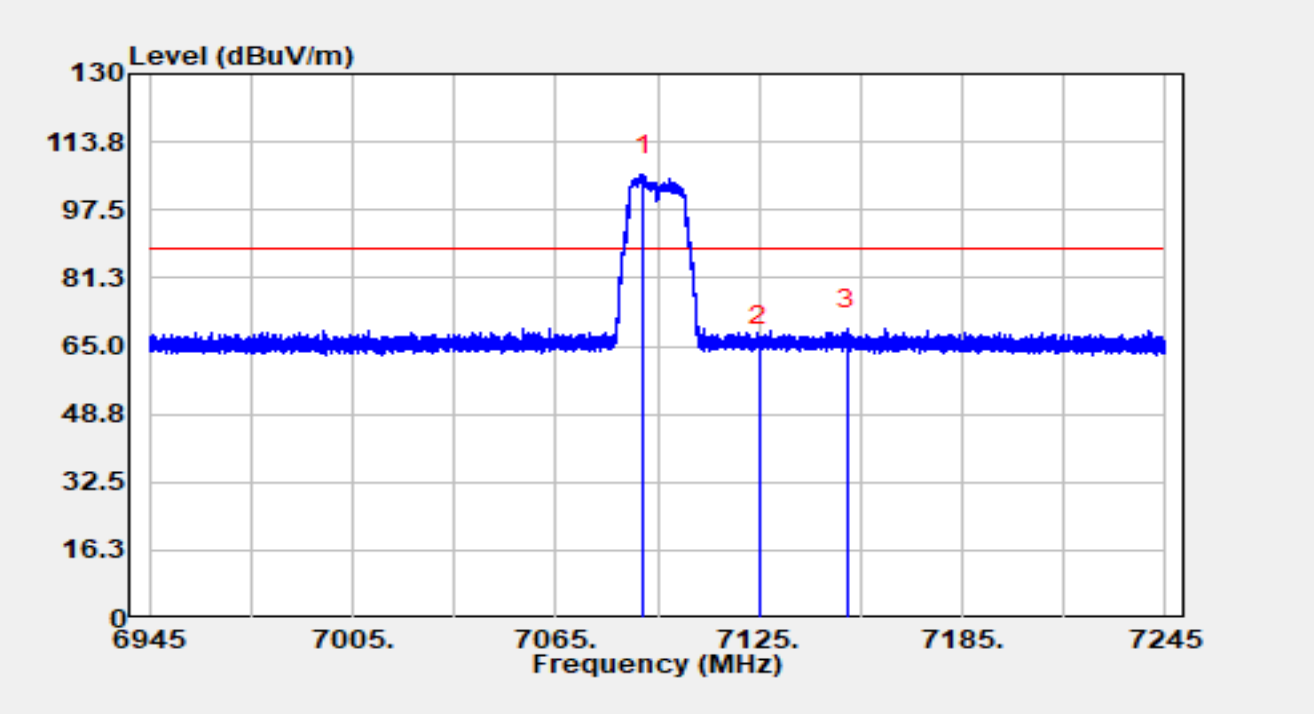


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7090.830 | 63.65 | 42.15 | 105.79 | N/A | N/A | Peak |
| 2 | | 7125.000 | 22.70 | 42.13 | 64.84 | -23.36 | 88.20 | Peak |
| 3 | * | 7150.890 | 26.73 | 42.25 | 68.99 | -19.21 | 88.20 | Peak |

Notes:

1. “ * “, means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11a at 7095MHz | | |

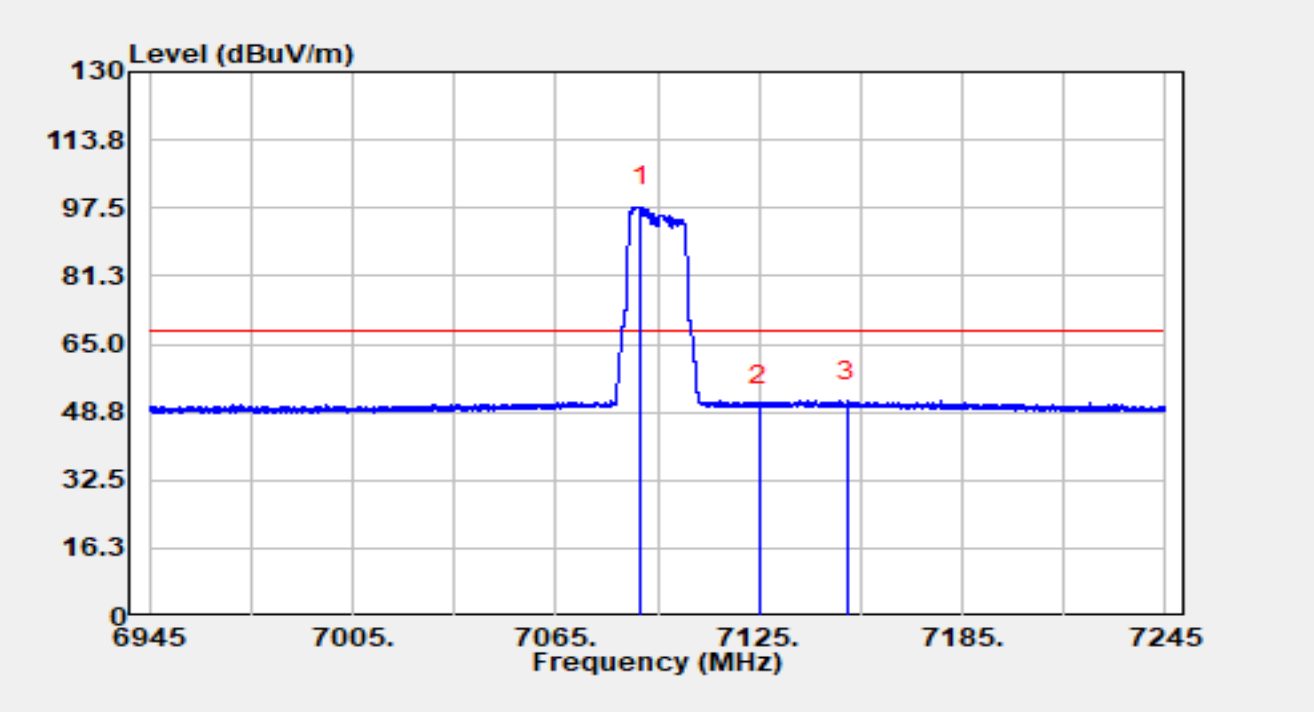


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7090.170 | 55.65 | 42.14 | 97.80 | N/A | N/A | Average |
| 2 | | 7125.000 | 8.35 | 42.13 | 50.48 | -17.72 | 68.20 | Average |
| 3 | * | 7151.130 | 9.18 | 42.25 | 51.44 | -16.76 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11a at 7095MHz | | |

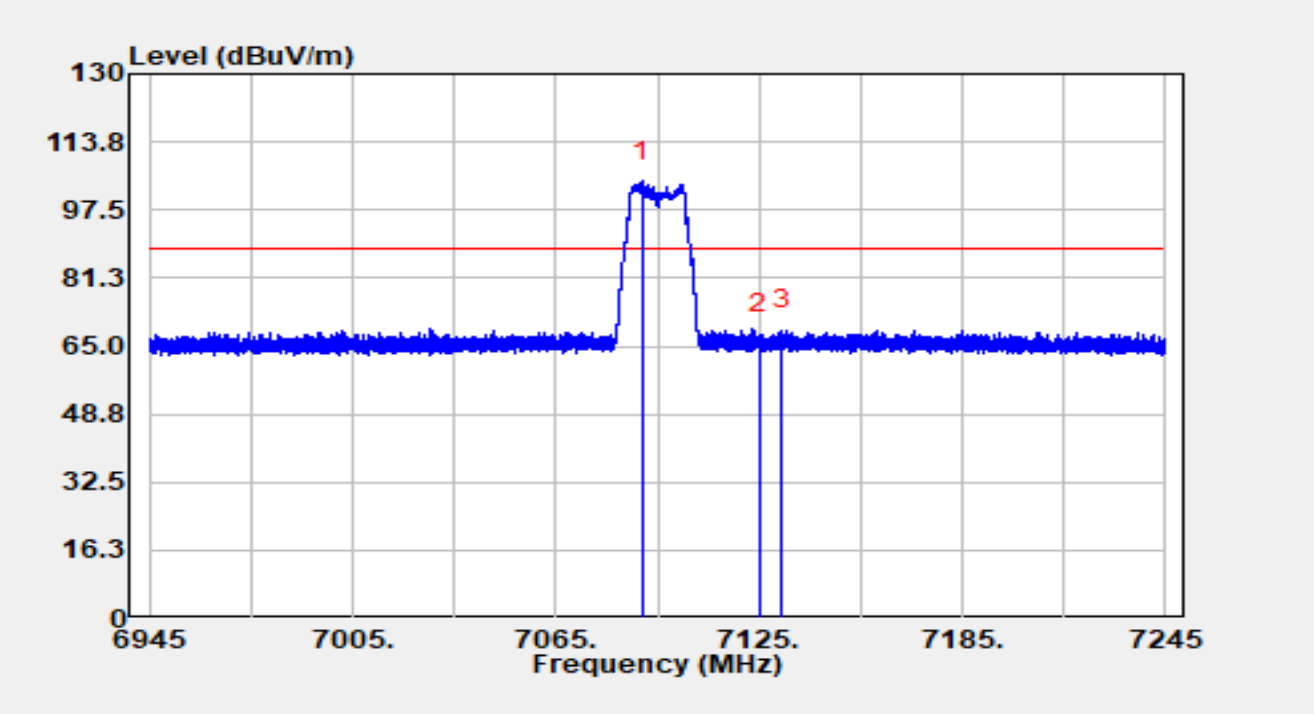


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7090.590 | 62.34 | 42.15 | 104.49 | N/A | N/A | Peak |
| 2 | | 7125.000 | 25.61 | 42.13 | 67.75 | -20.45 | 88.20 | Peak |
| 3 | * | 7131.600 | 26.72 | 42.18 | 68.91 | -19.29 | 88.20 | Peak |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11a at 7095MHz | | |

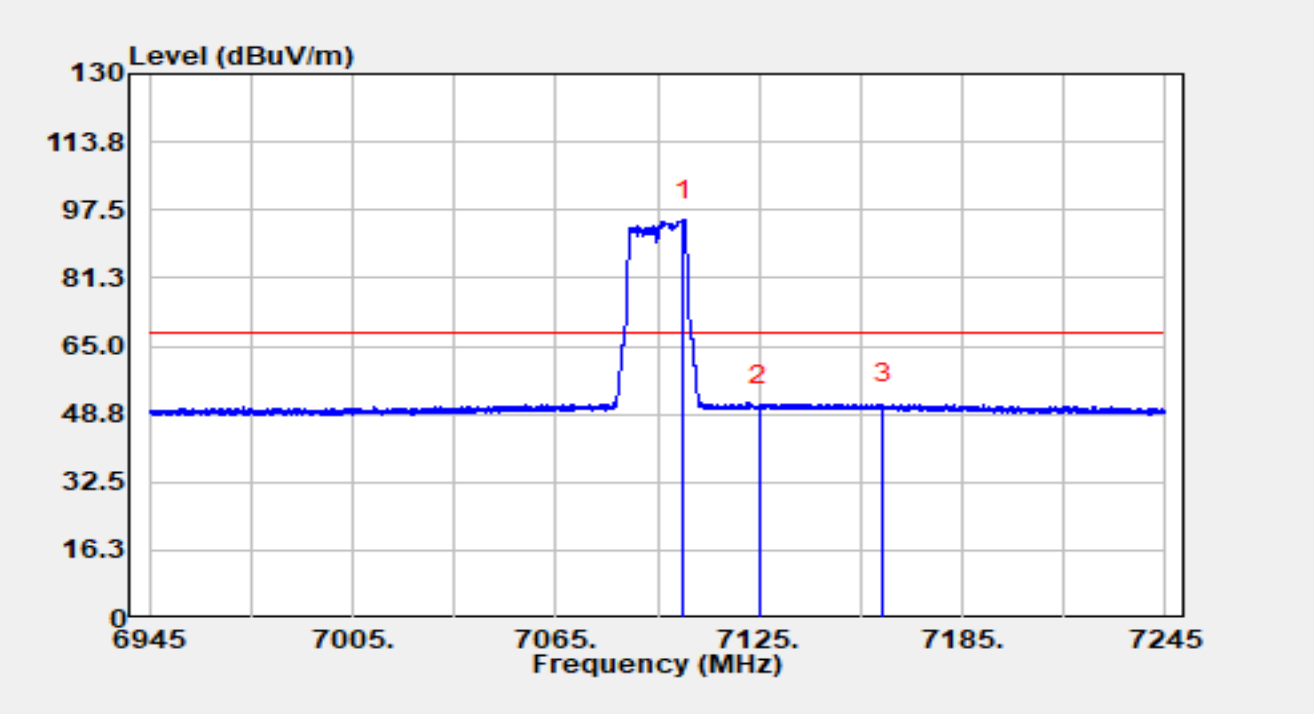


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7102.740 | 52.95 | 42.21 | 95.16 | N/A | N/A | Average |
| 2 | | 7125.000 | 8.42 | 42.13 | 50.55 | -17.65 | 68.20 | Average |
| 3 | * | 7161.780 | 9.02 | 42.22 | 51.25 | -16.95 | 68.20 | Average |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT20 at 5955MHz | | |

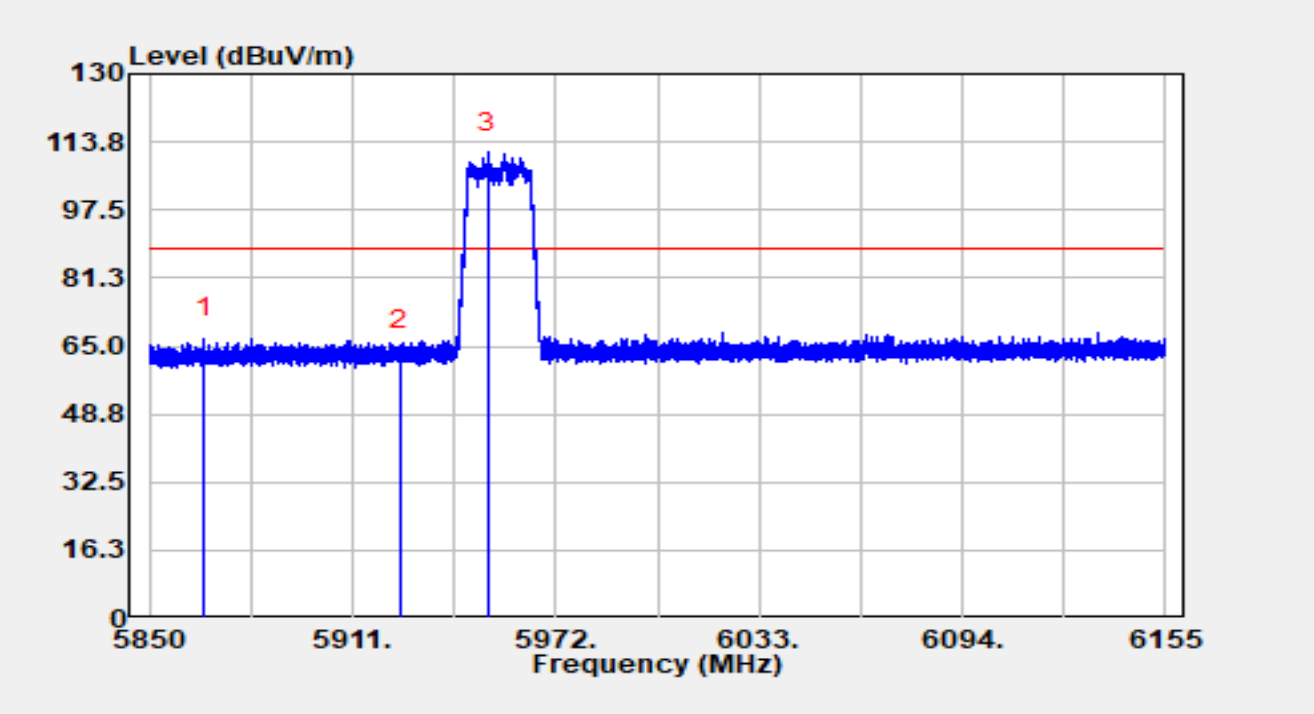


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5866.409 | 26.37 | 40.51 | 66.88 | -21.32 | 88.20 | Peak |
| 2 | | 5925.000 | 23.05 | 40.76 | 63.81 | -24.39 | 88.20 | Peak |
| 3 | | 5951.504 | 70.37 | 40.75 | 111.13 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT20 at 5955MHz | | |

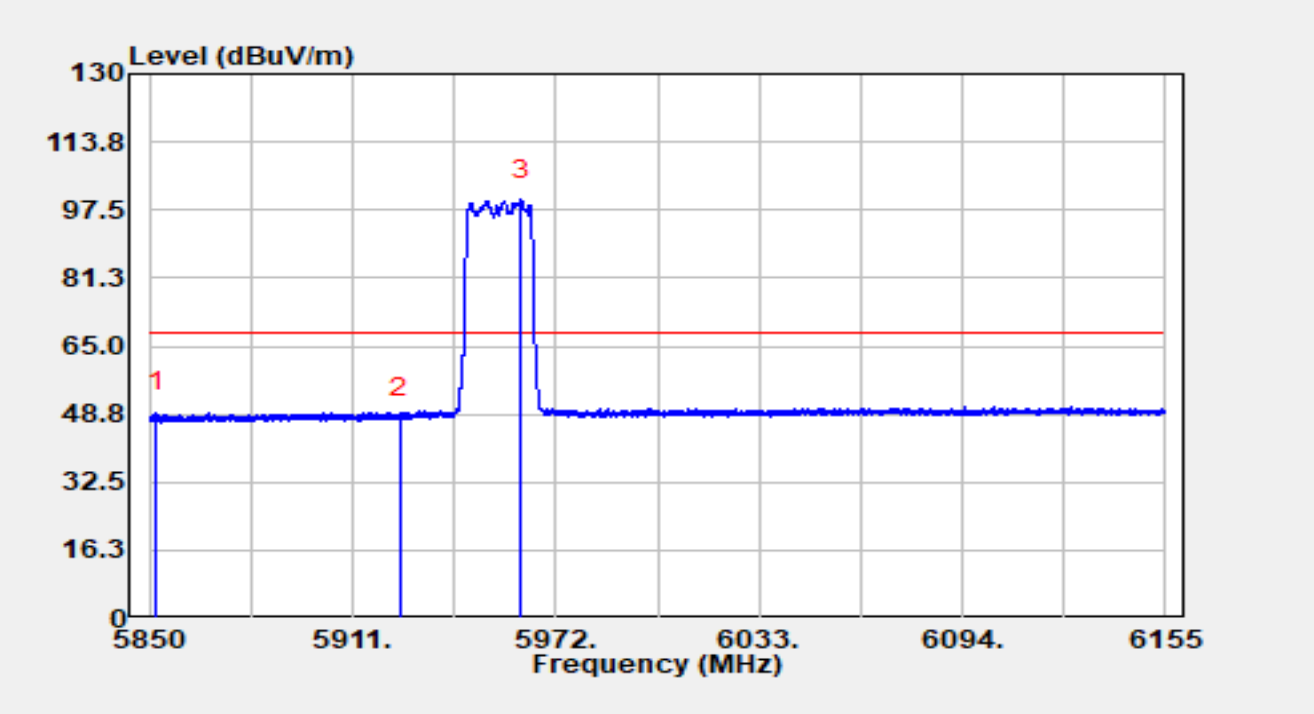


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5852.257 | 8.67 | 40.53 | 49.20 | -19.00 | 68.20 | Average |
| 2 | | 5925.000 | 7.14 | 40.76 | 47.90 | -20.30 | 68.20 | Average |
| 3 | | 5961.478 | 59.06 | 40.86 | 99.92 | N/A | N/A | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT20 at 5955MHz | | |

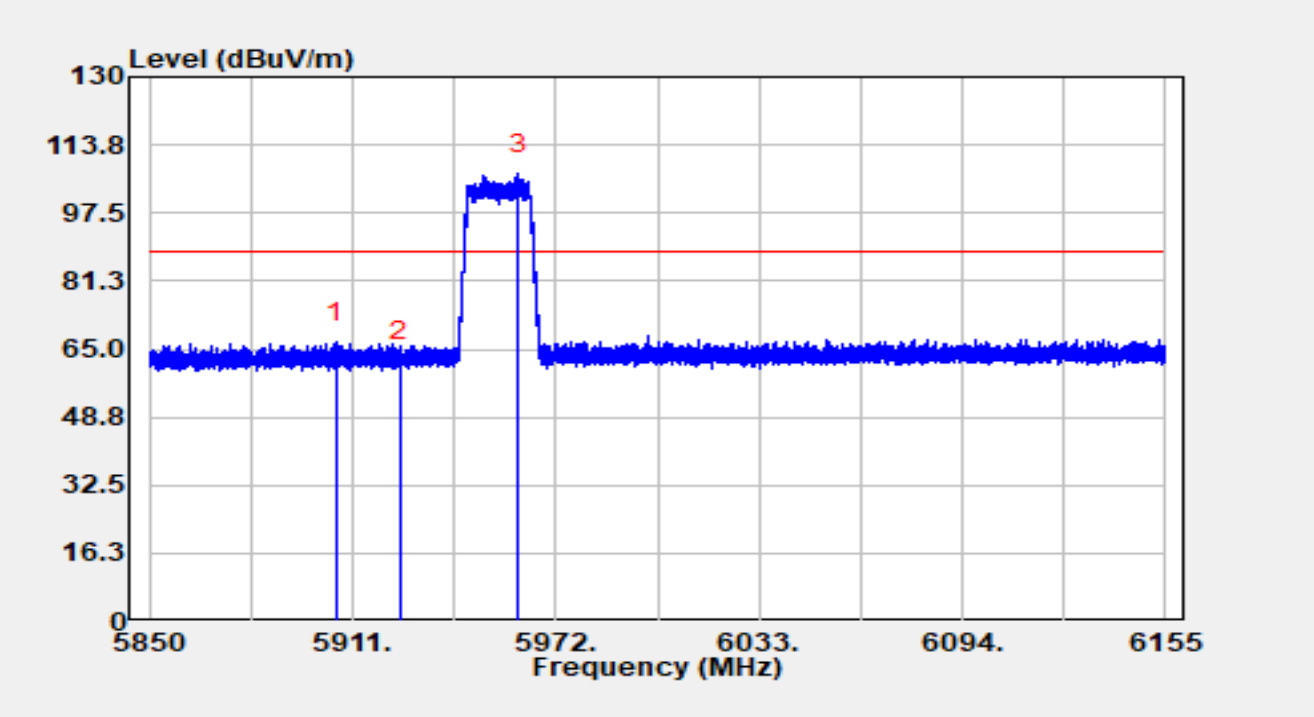


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5906.028 | 25.89 | 40.63 | 66.52 | -21.68 | 88.20 | Peak |
| 2 | | 5925.000 | 21.08 | 40.76 | 61.84 | -26.36 | 88.20 | Peak |
| 3 | | 5960.563 | 65.95 | 40.85 | 106.80 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT20 at 5955MHz | | |

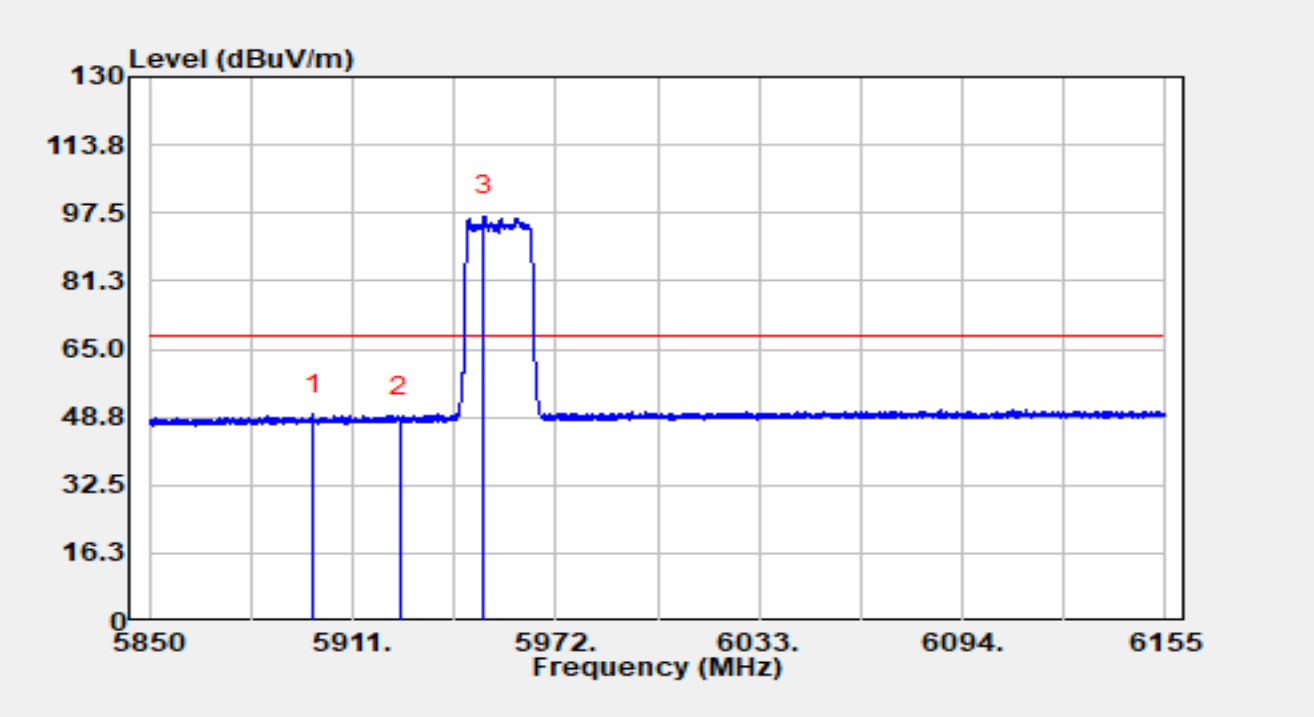


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5899.379 | 8.66 | 40.65 | 49.31 | -18.89 | 68.20 | Average |
| 2 | | 5925.000 | 7.91 | 40.76 | 48.66 | -19.54 | 68.20 | Average |
| 3 | | 5950.467 | 55.94 | 40.74 | 96.69 | N/A | N/A | Average |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT20 at 7095MHz | | |

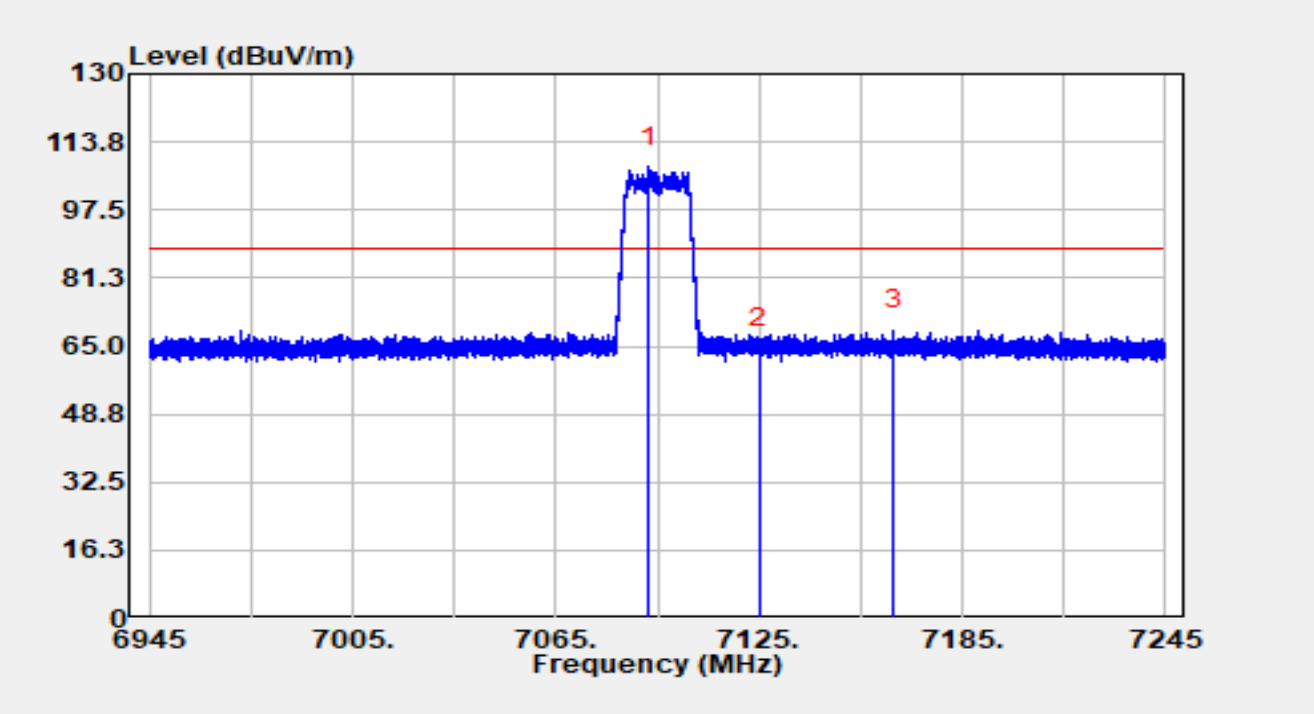


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7092.540 | 65.69 | 42.16 | 107.85 | N/A | N/A | Peak |
| 2 | | 7125.000 | 22.39 | 42.13 | 64.52 | -23.68 | 88.20 | Peak |
| 3 | * | 7164.630 | 26.57 | 42.21 | 68.78 | -19.42 | 88.20 | Peak |

Notes:

1. “ * “, means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT20 at 7095MHz | | |

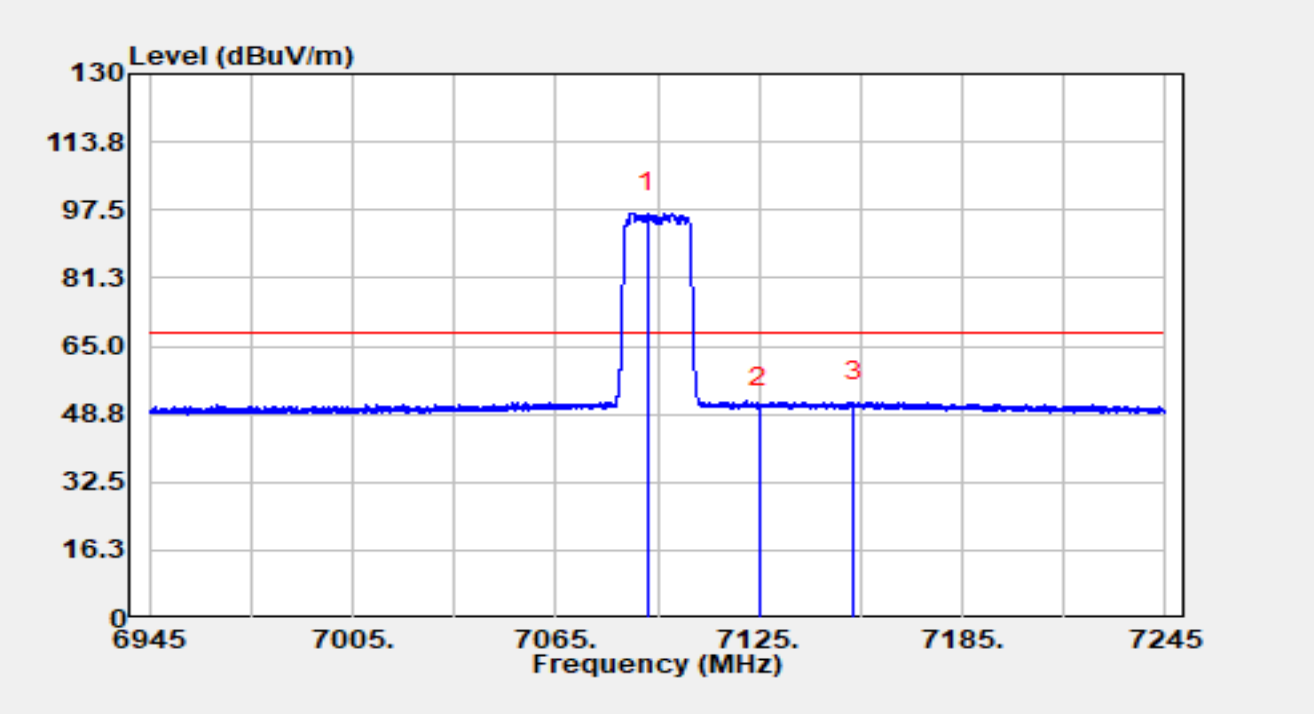


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7092.210 | 54.70 | 42.15 | 96.86 | N/A | N/A | Average |
| 2 | | 7125.000 | 8.25 | 42.13 | 50.38 | -17.82 | 68.20 | Average |
| 3 | * | 7152.900 | 9.49 | 42.25 | 51.74 | -16.46 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT20 at 7095MHz | | |

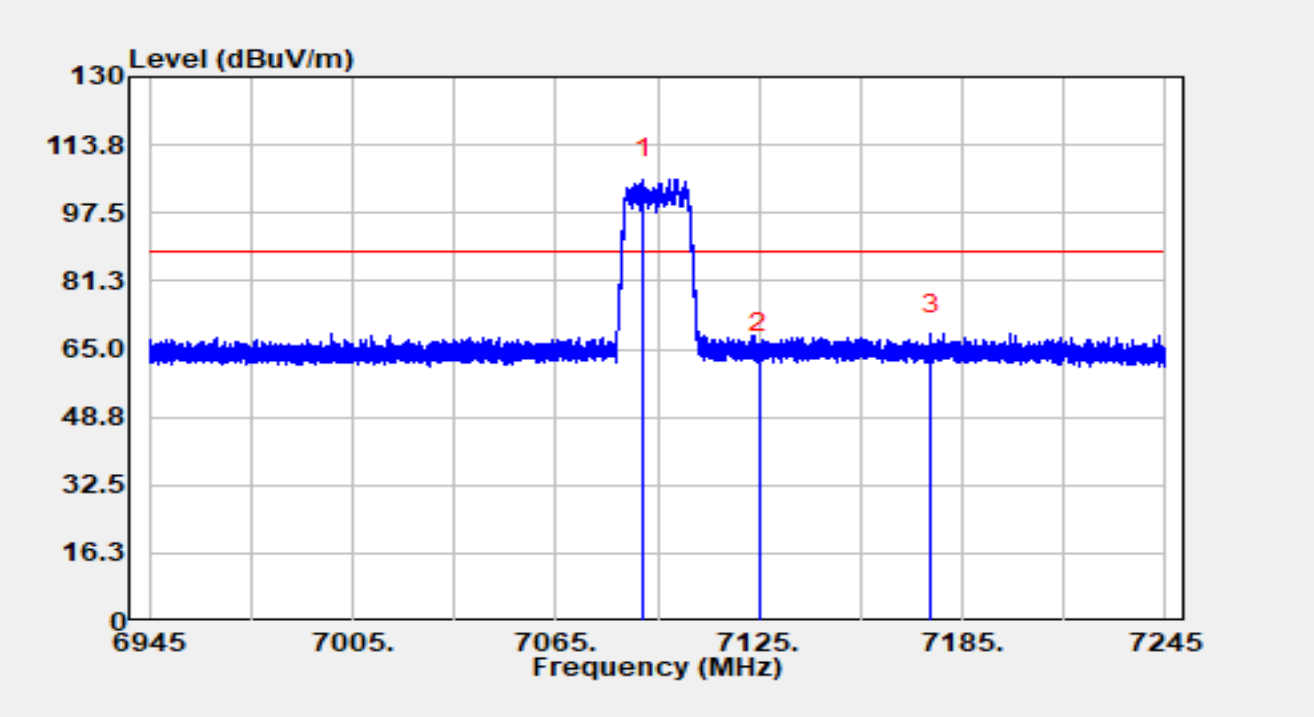


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7090.890 | 63.50 | 42.15 | 105.64 | N/A | N/A | Peak |
| 2 | | 7125.000 | 21.71 | 42.13 | 63.84 | -24.36 | 88.20 | Peak |
| 3 | * | 7175.670 | 26.46 | 42.20 | 68.65 | -19.55 | 88.20 | Peak |

Notes:

1. “ * “, means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT20 at 7095MHz | | |

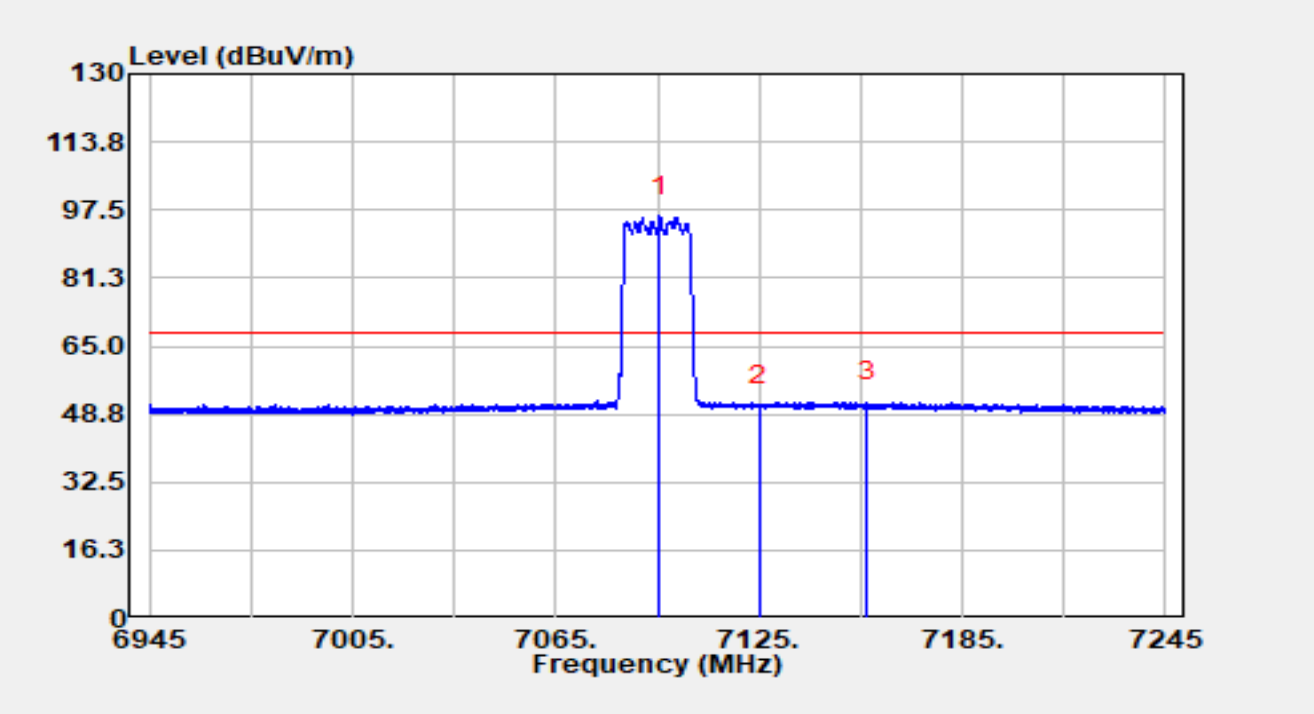


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7095.660 | 53.77 | 42.17 | 95.95 | N/A | N/A | Average |
| 2 | | 7125.000 | 8.41 | 42.13 | 50.54 | -17.66 | 68.20 | Average |
| 3 | * | 7156.890 | 9.34 | 42.24 | 51.58 | -16.62 | 68.20 | Average |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT40 at 5965MHz | | |

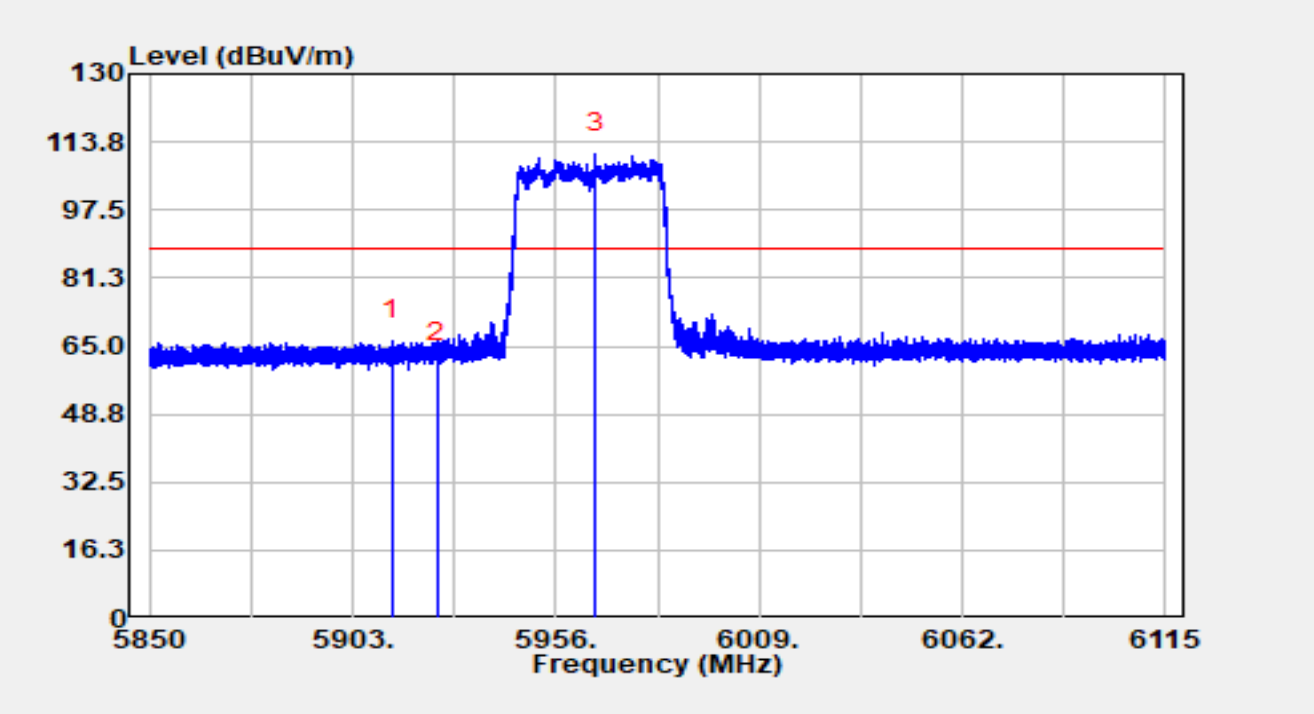


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5913.229 | 25.65 | 40.61 | 66.26 | -21.94 | 88.20 | Peak |
| 2 | | 5925.000 | 20.33 | 40.76 | 61.09 | -27.11 | 88.20 | Peak |
| 3 | | 5966.521 | 70.22 | 40.87 | 111.09 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT40 at 5965MHz | | |

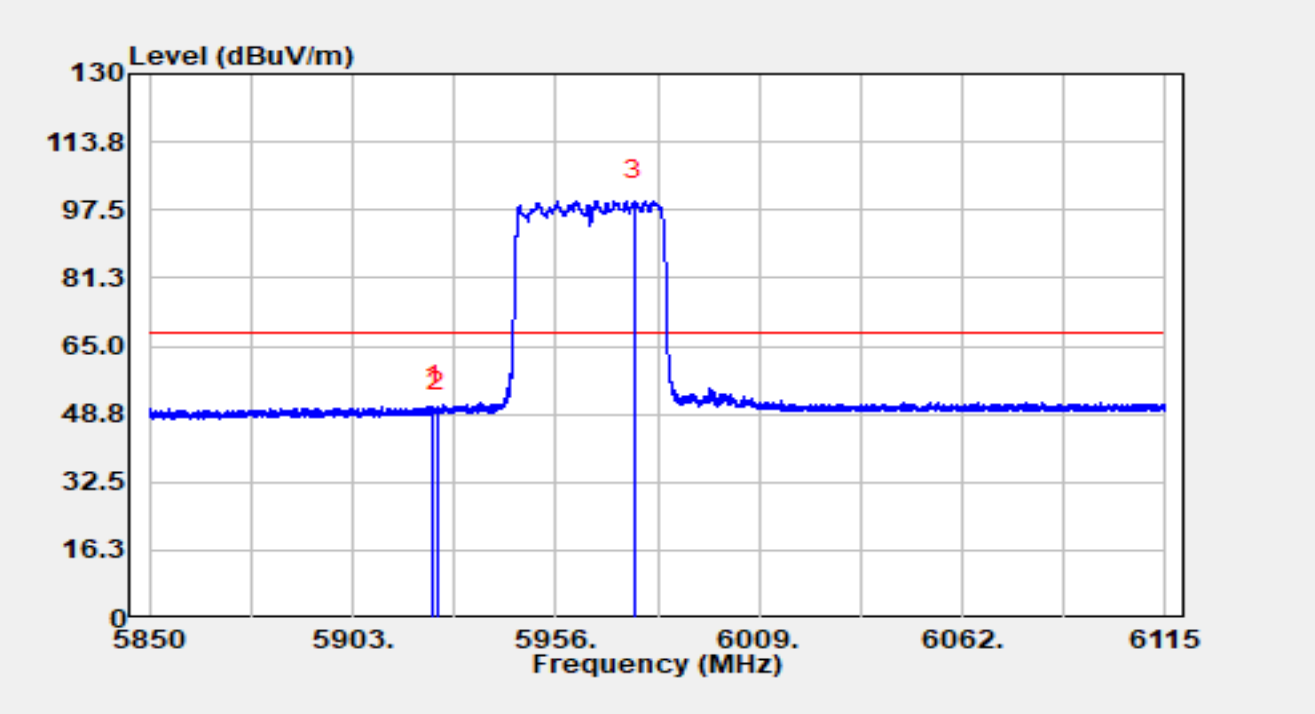


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5924.067 | 9.91 | 40.75 | 50.65 | -17.55 | 68.20 | Average |
| 2 | | 5925.000 | 8.60 | 40.76 | 49.36 | -18.84 | 68.20 | Average |
| 3 | | 5976.564 | 58.91 | 40.80 | 99.71 | N/A | N/A | Average |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT40 at 5965MHz | | |

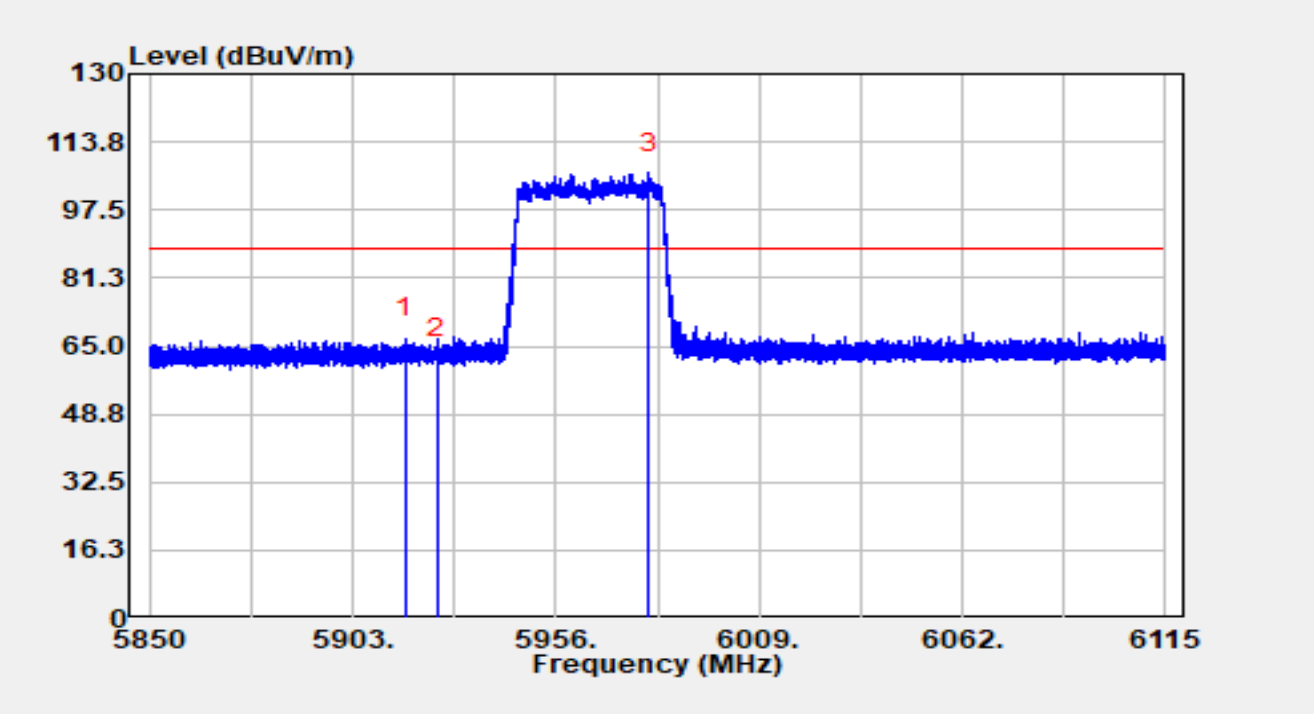


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5916.807 | 26.26 | 40.66 | 66.92 | -21.28 | 88.20 | Peak |
| 2 | | 5925.000 | 21.21 | 40.76 | 61.97 | -26.23 | 88.20 | Peak |
| 3 | | 5980.221 | 65.59 | 40.77 | 106.36 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT40 at 5965MHz | | |

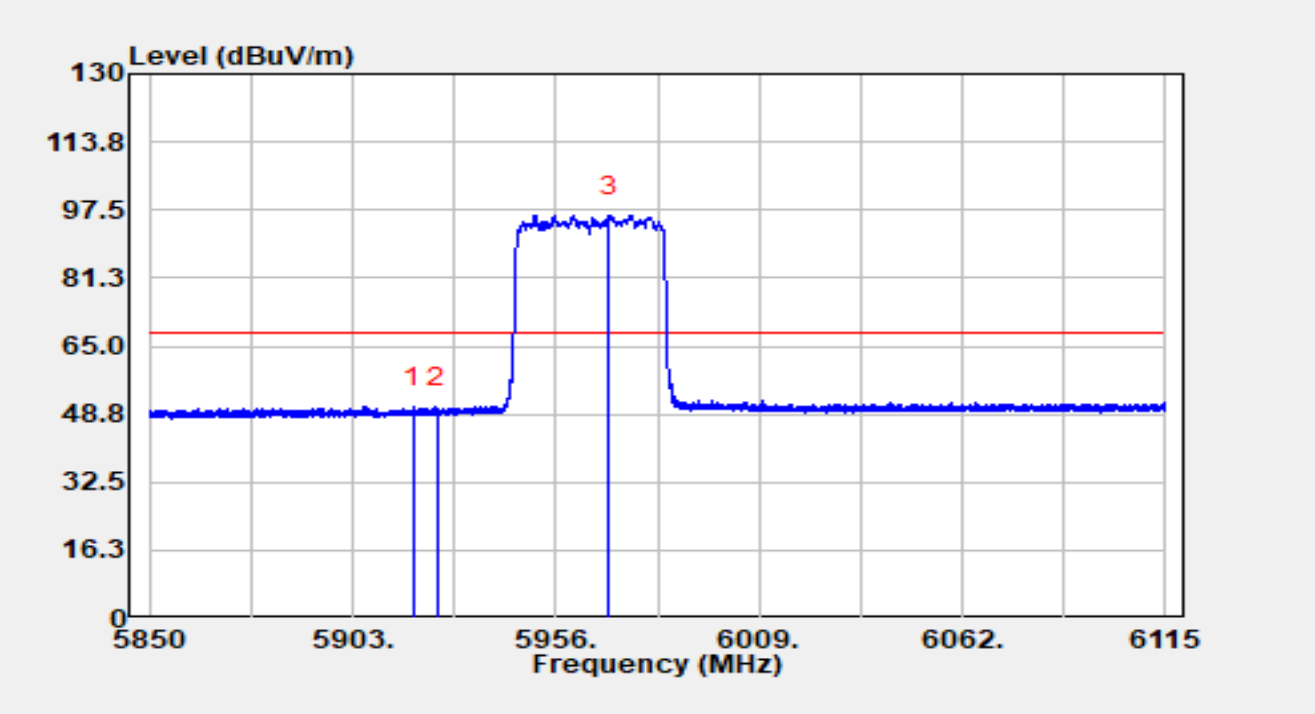


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5918.926 | 9.69 | 40.68 | 50.37 | -17.83 | 68.20 | Average |
| 2 | | 5925.000 | 9.29 | 40.76 | 50.05 | -18.15 | 68.20 | Average |
| 3 | | 5969.992 | 55.26 | 40.85 | 96.11 | N/A | N/A | Average |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT40 at 7085MHz | | |

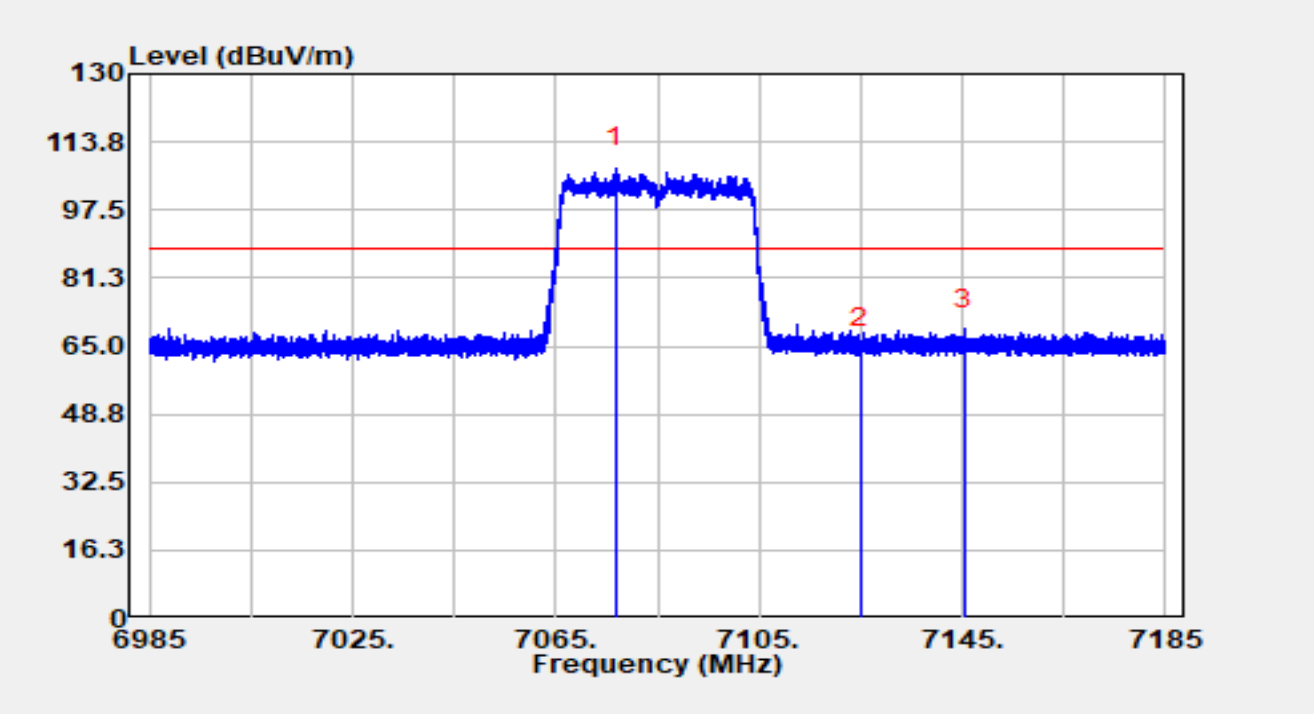


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7076.640 | 65.36 | 42.12 | 107.48 | N/A | N/A | Peak |
| 2 | | 7125.000 | 22.34 | 42.13 | 64.48 | -23.72 | 88.20 | Peak |
| 3 | * | 7145.340 | 26.85 | 42.24 | 69.10 | -19.10 | 88.20 | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT40 at 7085MHz | | |

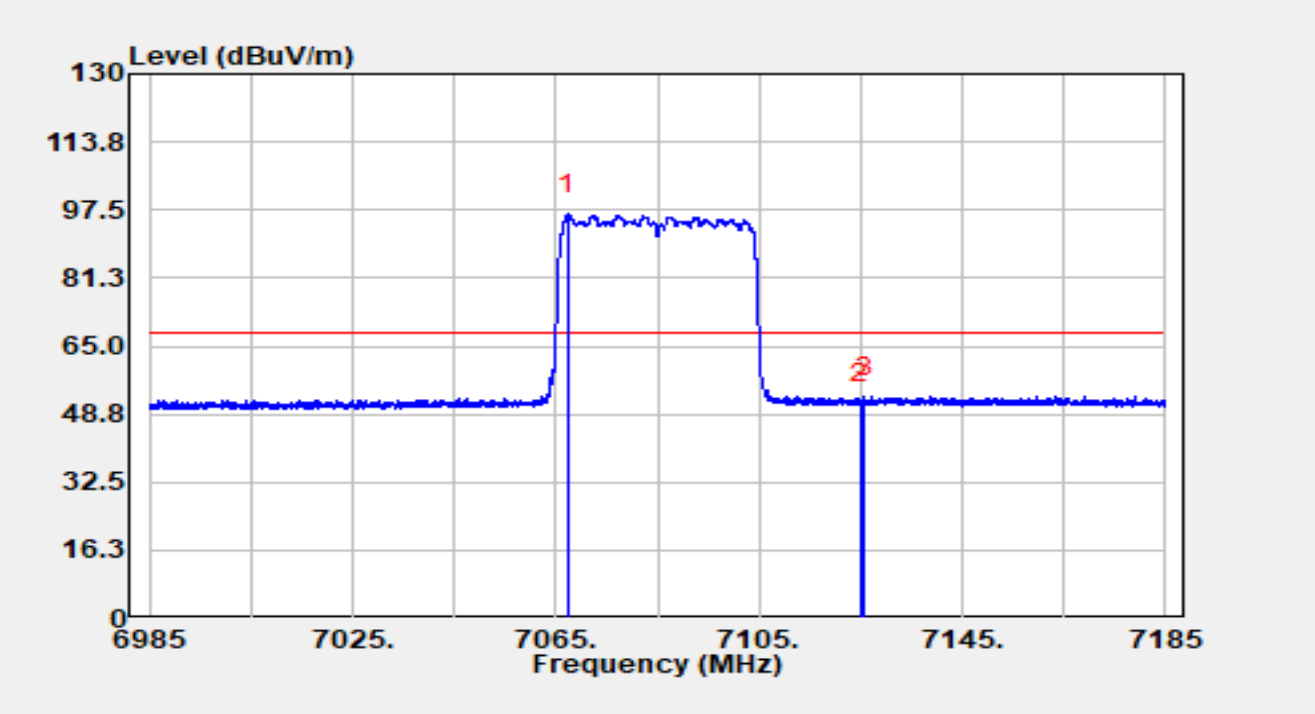


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7067.340 | 54.43 | 42.11 | 96.54 | N/A | N/A | Average |
| 2 | | 7125.000 | 9.34 | 42.13 | 51.48 | -16.72 | 68.20 | Average |
| 3 | * | 7125.620 | 10.73 | 42.14 | 52.87 | -15.33 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT40 at 7085MHz | | |

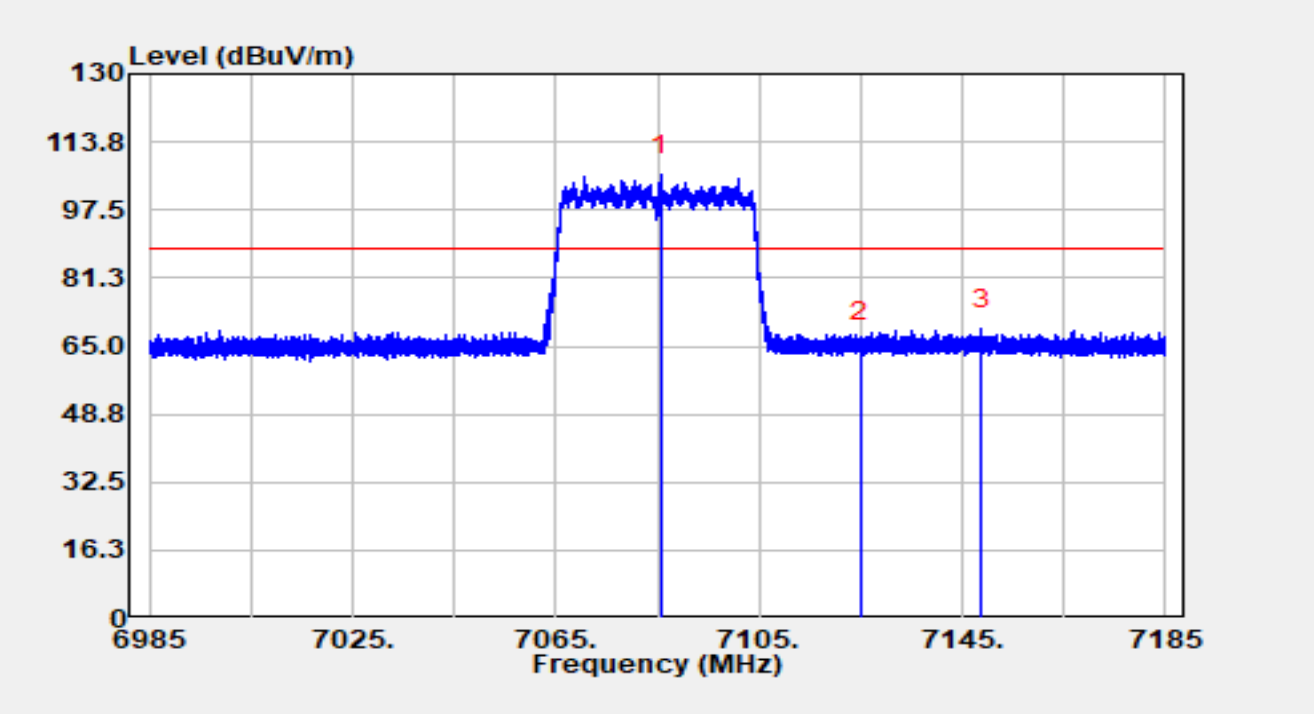


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7085.620 | 63.81 | 42.12 | 105.92 | N/A | N/A | Peak |
| 2 | | 7125.000 | 23.97 | 42.13 | 66.10 | -22.10 | 88.20 | Peak |
| 3 | * | 7148.660 | 26.83 | 42.25 | 69.08 | -19.12 | 88.20 | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT40 at 7085MHz | | |

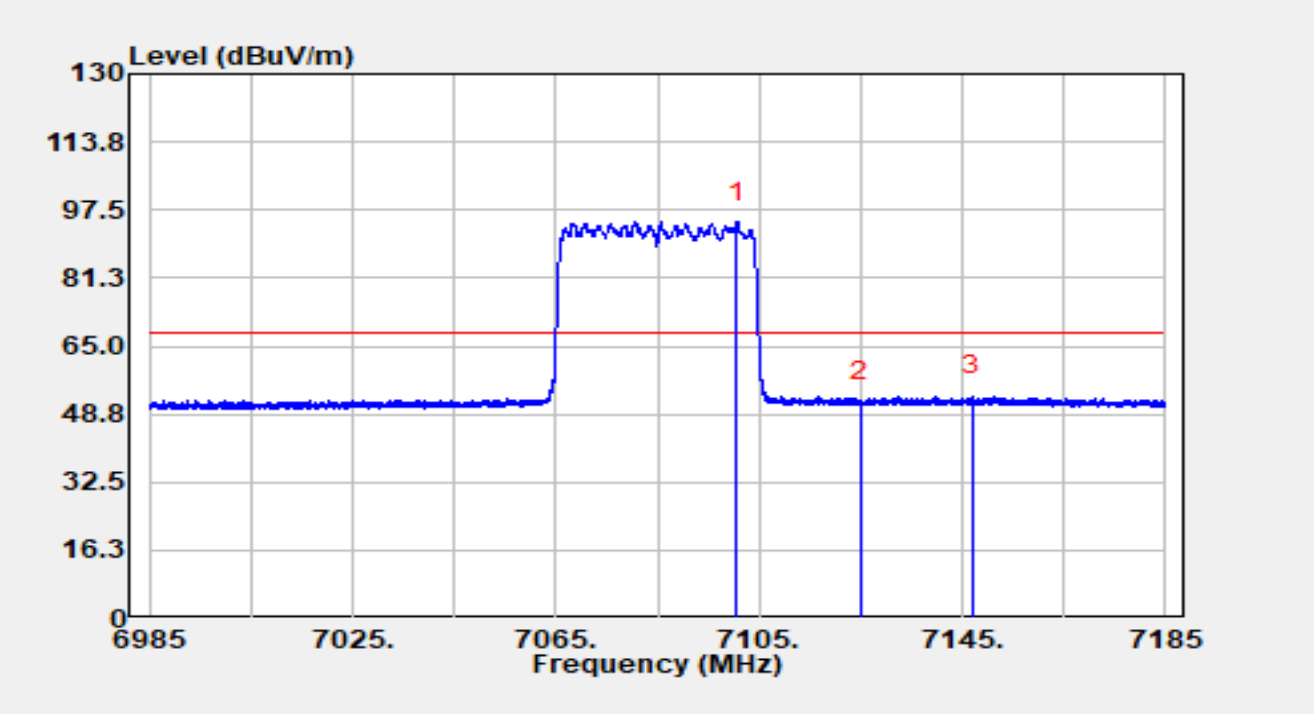


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7100.700 | 52.36 | 42.20 | 94.57 | N/A | N/A | Average |
| 2 | | 7125.000 | 9.67 | 42.13 | 51.81 | -16.39 | 68.20 | Average |
| 3 | * | 7146.880 | 10.74 | 42.25 | 52.99 | -15.21 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT80 at 5985MHz | | |

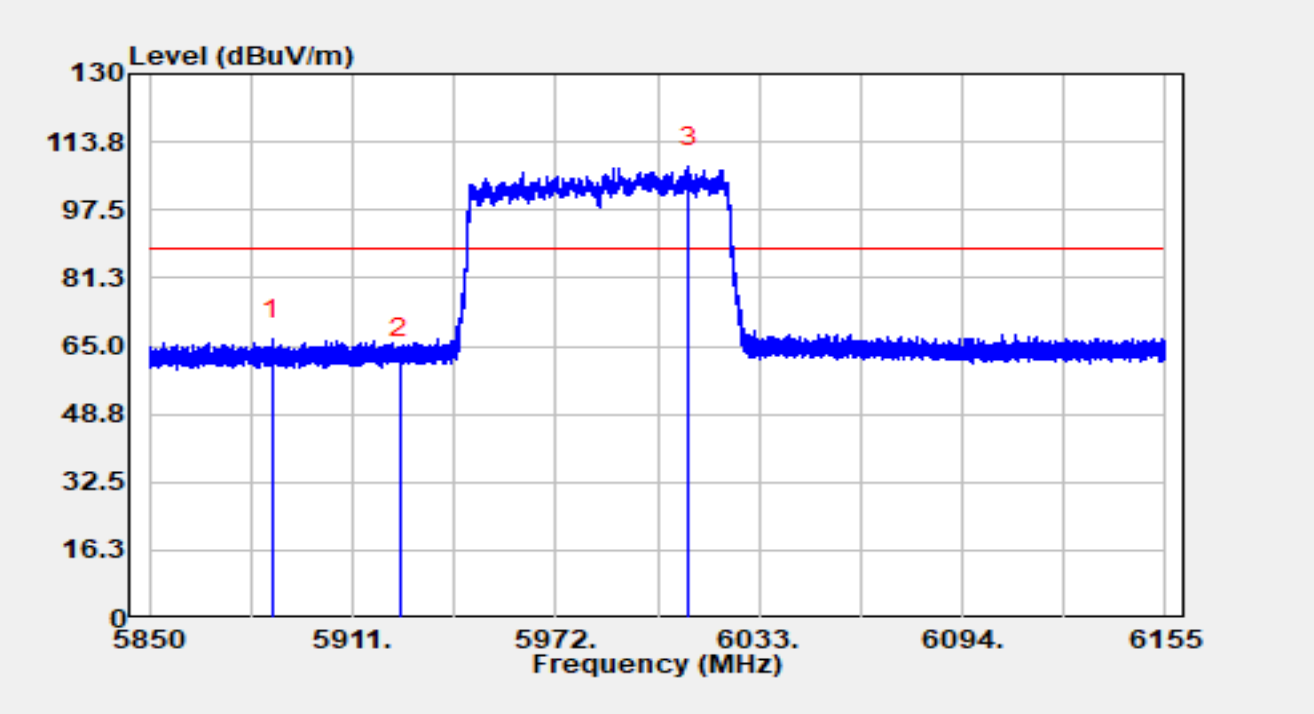


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5887.027 | 26.05 | 40.62 | 66.66 | -21.54 | 88.20 | Peak |
| 2 | | 5925.000 | 21.36 | 40.76 | 62.12 | -26.08 | 88.20 | Peak |
| 3 | | 6011.711 | 66.88 | 40.99 | 107.87 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT80 at 5985MHz | | |

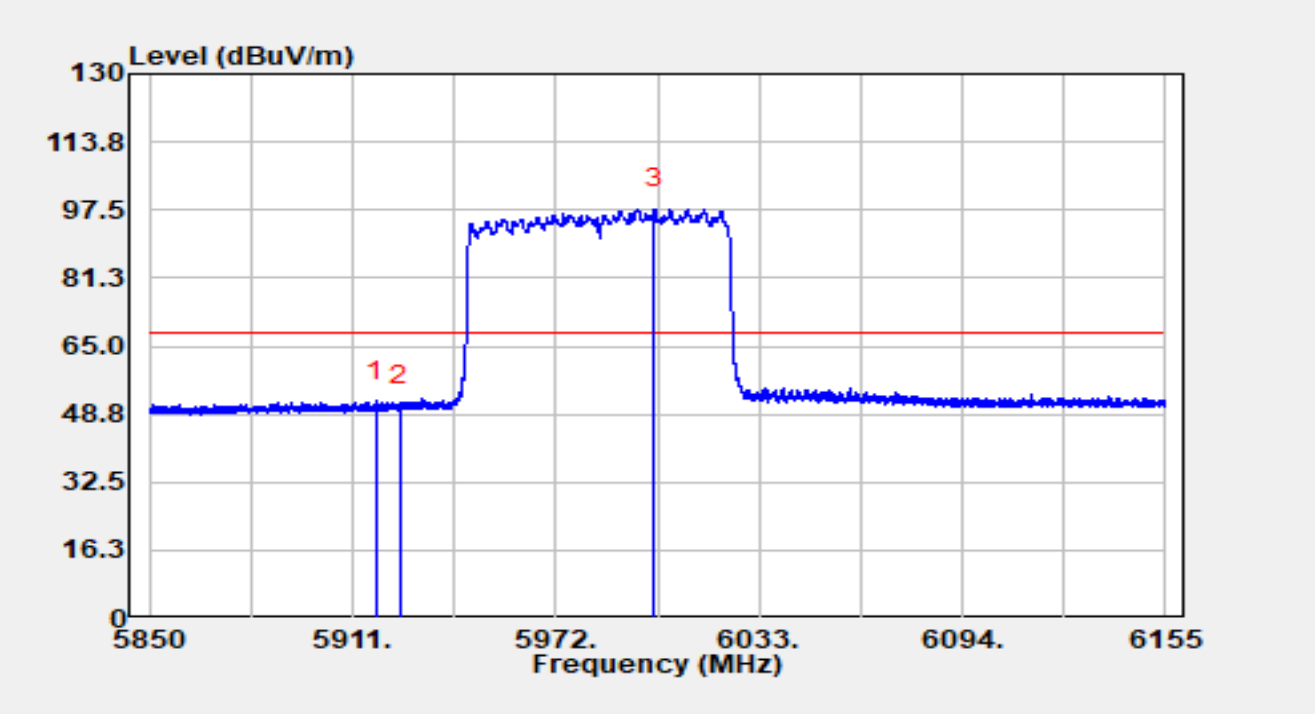


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5918.137 | 11.28 | 40.67 | 51.95 | -16.25 | 68.20 | Average |
| 2 | | 5925.000 | 10.05 | 40.76 | 50.81 | -17.39 | 68.20 | Average |
| 3 | | 6001.524 | 56.80 | 41.00 | 97.80 | N/A | N/A | Average |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT80 at 5985MHz | | |

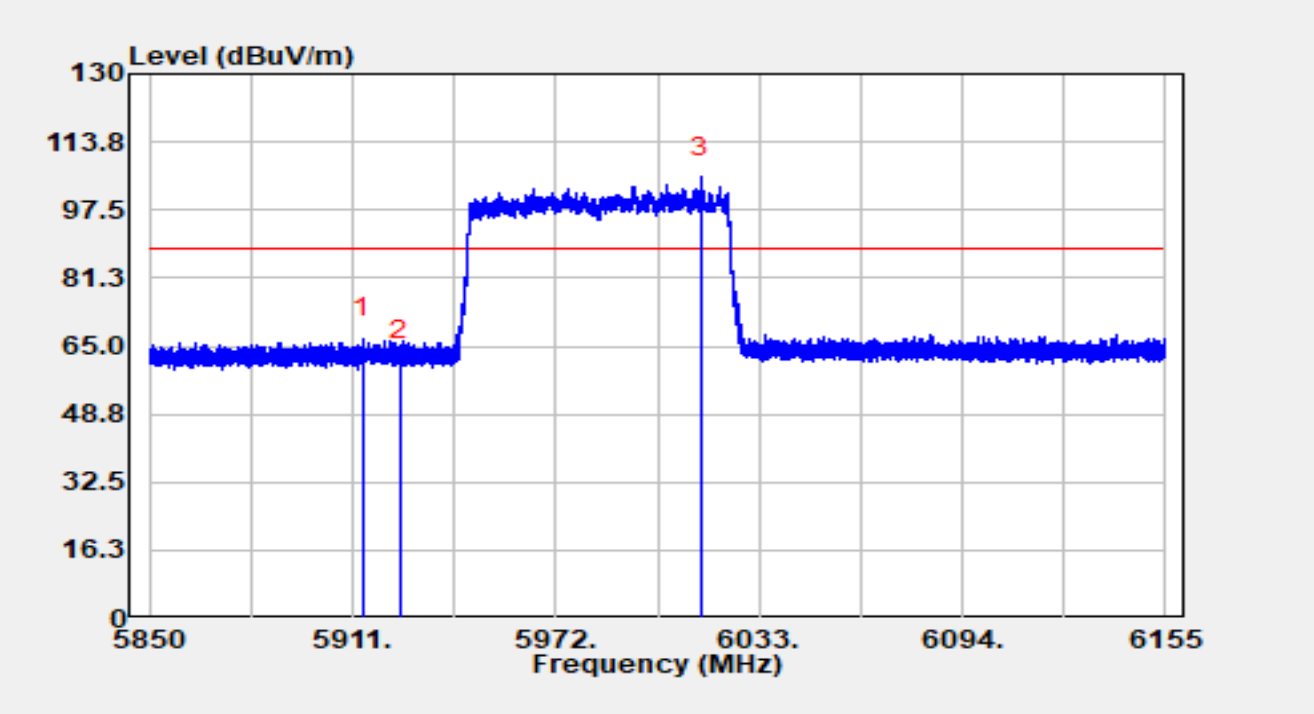


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5914.020 | 26.14 | 40.62 | 66.76 | -21.44 | 88.20 | Peak |
| 2 | | 5925.000 | 20.91 | 40.76 | 61.67 | -26.53 | 88.20 | Peak |
| 3 | | 6015.371 | 64.38 | 40.99 | 105.37 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT80 at 5985MHz | | |

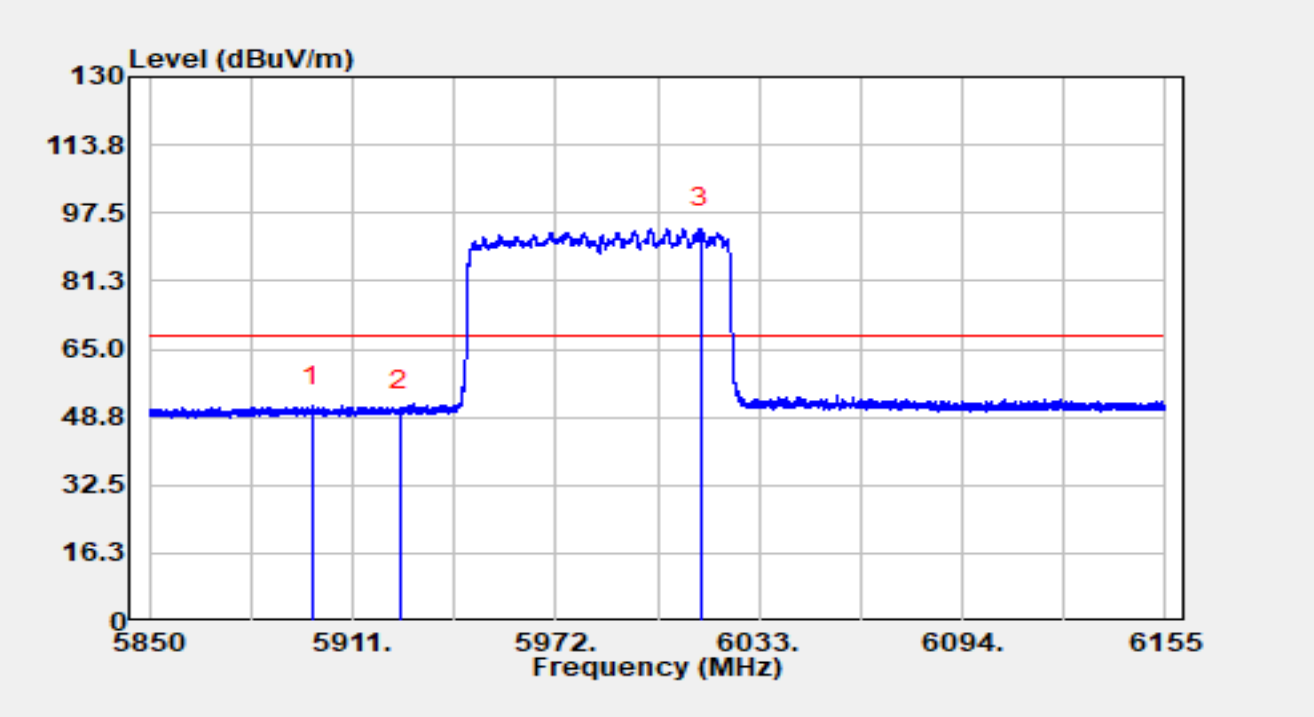


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5898.739 | 10.70 | 40.65 | 51.35 | -16.85 | 68.20 | Average |
| 2 | | 5925.000 | 9.57 | 40.76 | 50.32 | -17.88 | 68.20 | Average |
| 3 | | 6015.523 | 52.90 | 40.99 | 93.88 | N/A | N/A | Average |

Notes:

1. “ * “, means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT80 at 7025MHz | | |

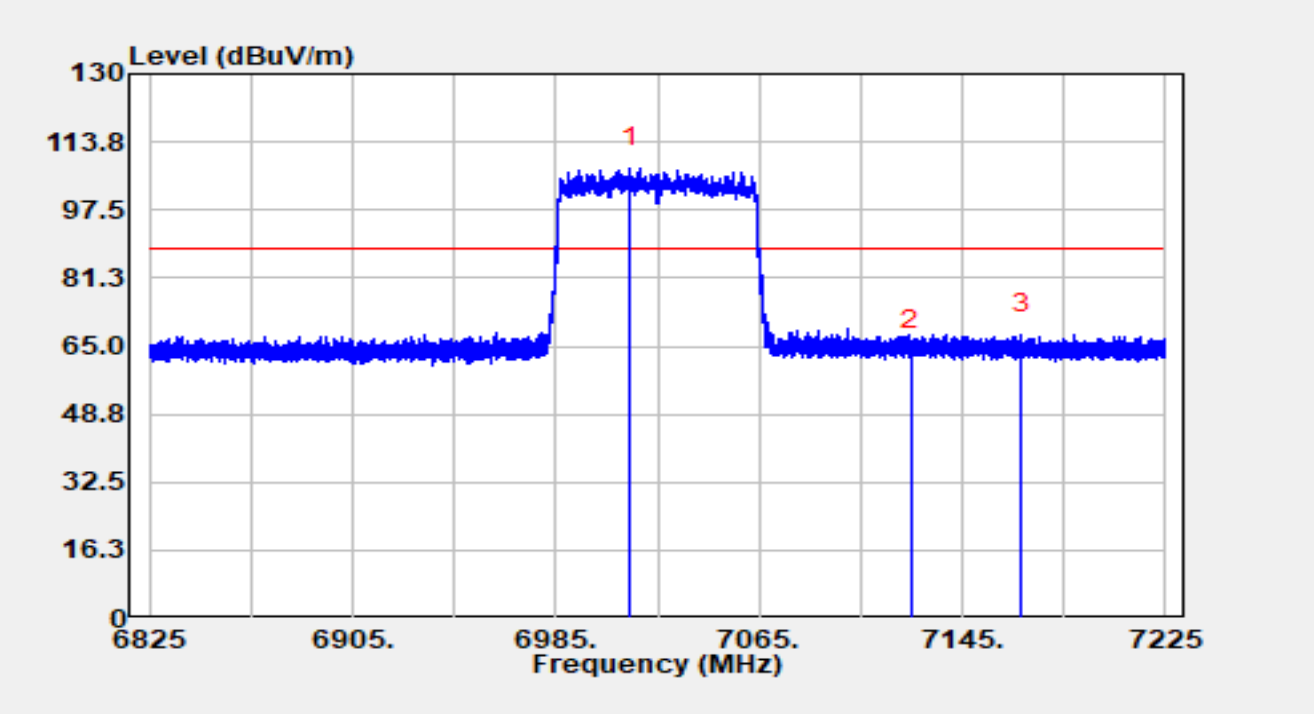


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7014.480 | 65.67 | 41.96 | 107.64 | N/A | N/A | Peak |
| 2 | | 7125.000 | 21.79 | 42.13 | 63.92 | -24.28 | 88.20 | Peak |
| 3 | * | 7168.440 | 25.66 | 42.20 | 67.86 | -20.34 | 88.20 | Peak |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT80 at 7025MHz | | |

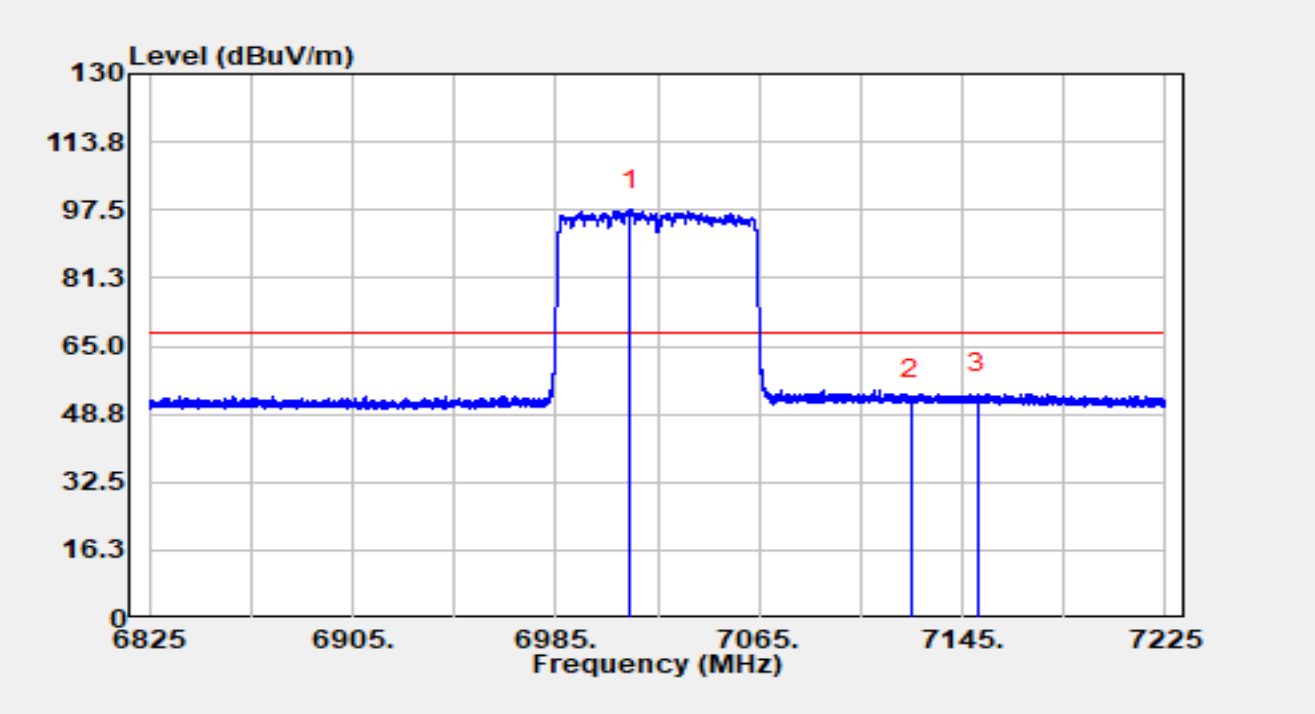


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7014.520 | 55.50 | 41.96 | 97.46 | N/A | N/A | Average |
| 2 | | 7125.000 | 10.31 | 42.13 | 52.44 | -15.76 | 68.20 | Average |
| 3 | * | 7151.120 | 11.40 | 42.25 | 53.66 | -14.54 | 68.20 | Average |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT80 at 7025MHz | | |

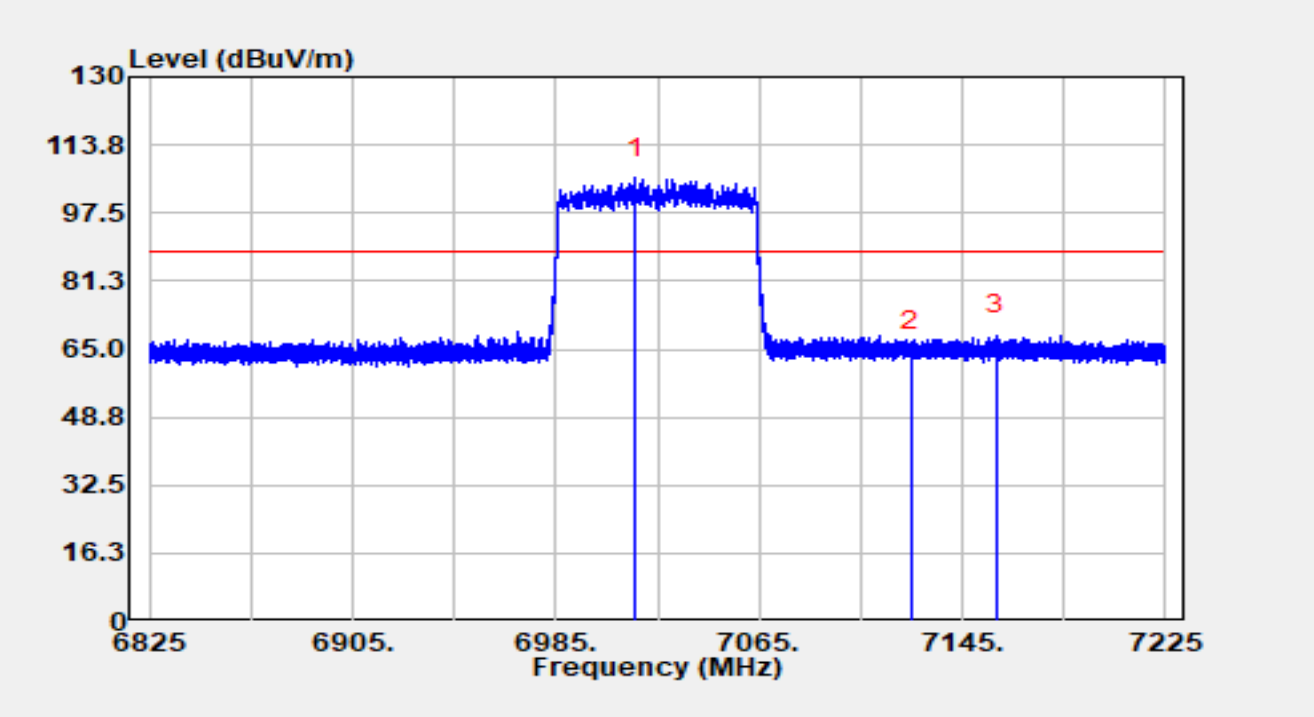


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7016.120 | 63.80 | 41.97 | 105.77 | N/A | N/A | Peak |
| 2 | | 7125.000 | 22.31 | 42.13 | 64.44 | -23.76 | 88.20 | Peak |
| 3 | * | 7158.360 | 26.03 | 42.24 | 68.27 | -19.93 | 88.20 | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT80 at 7025MHz | | |

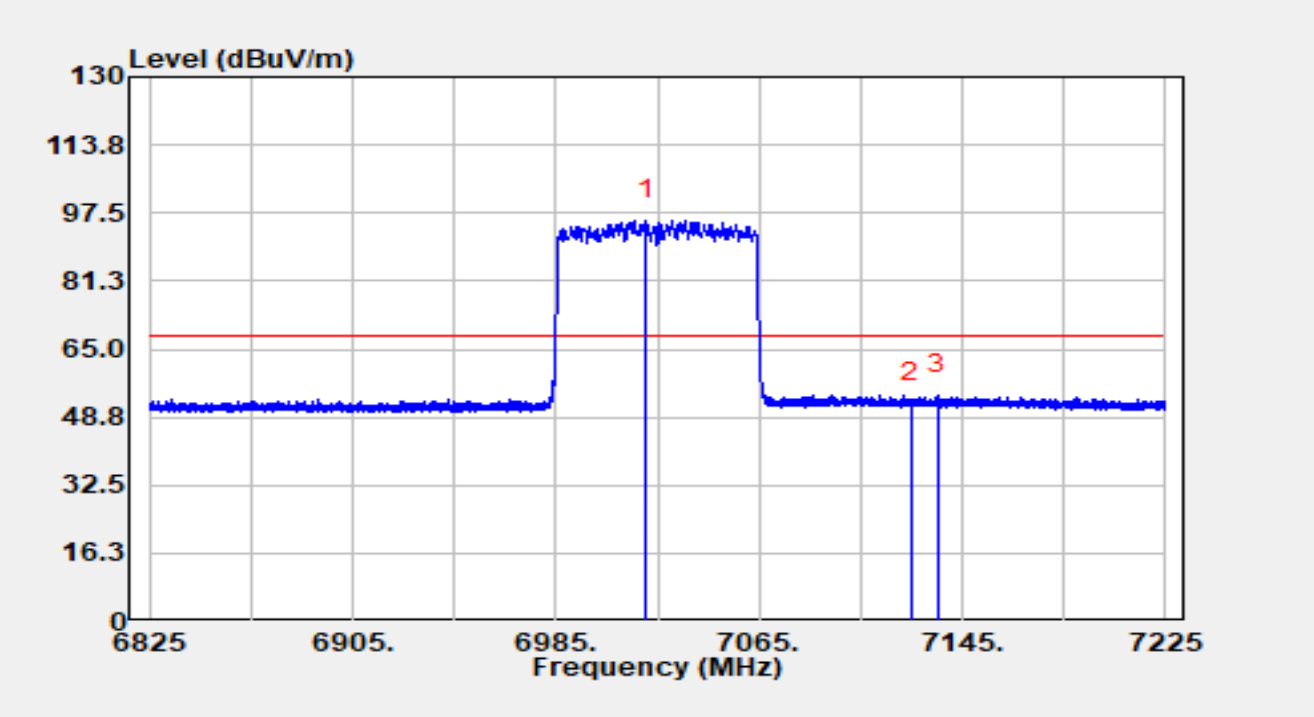


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7020.760 | 53.71 | 41.99 | 95.70 | N/A | N/A | Average |
| 2 | | 7125.000 | 9.95 | 42.13 | 52.08 | -16.12 | 68.20 | Average |
| 3 | * | 7135.520 | 11.86 | 42.21 | 54.07 | -14.13 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT160 at 6025MHz | | |

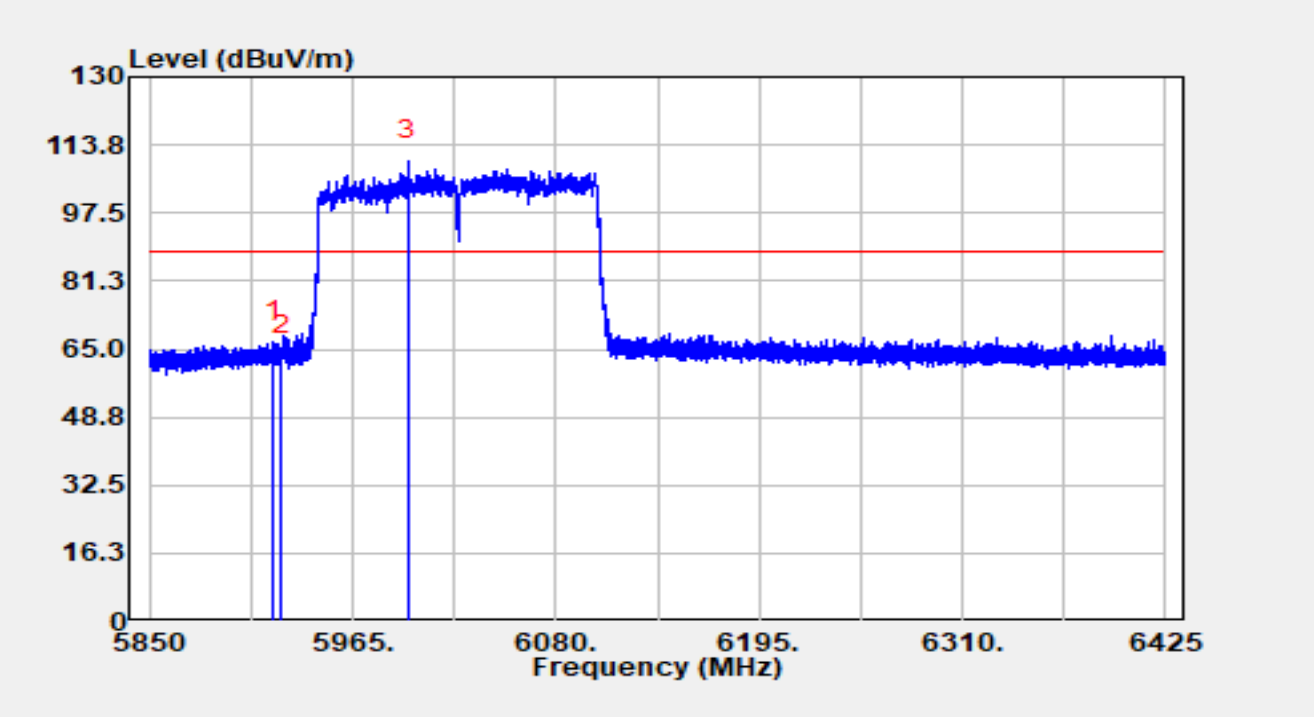


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5920.035 | 26.09 | 40.70 | 66.79 | -21.41 | 88.20 | Peak |
| 2 | | 5925.000 | 22.80 | 40.76 | 63.55 | -24.65 | 88.20 | Peak |
| 3 | | 5996.050 | 69.10 | 40.97 | 110.08 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT160 at 6025MHz | | |

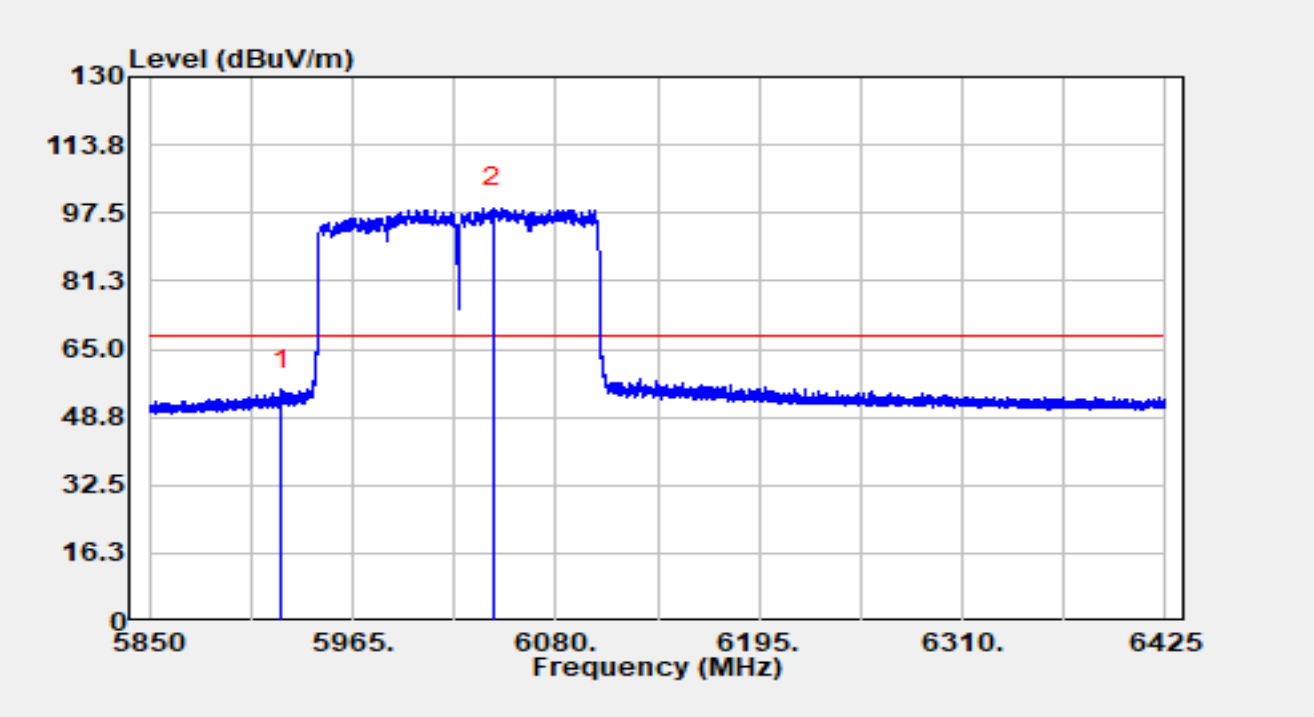


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5925.000 | 14.21 | 40.76 | 54.97 | -13.23 | 68.20 | Average |
| 2 | | 6044.408 | 57.73 | 41.02 | 98.74 | N/A | N/A | Average |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT160 at 6025MHz | | |

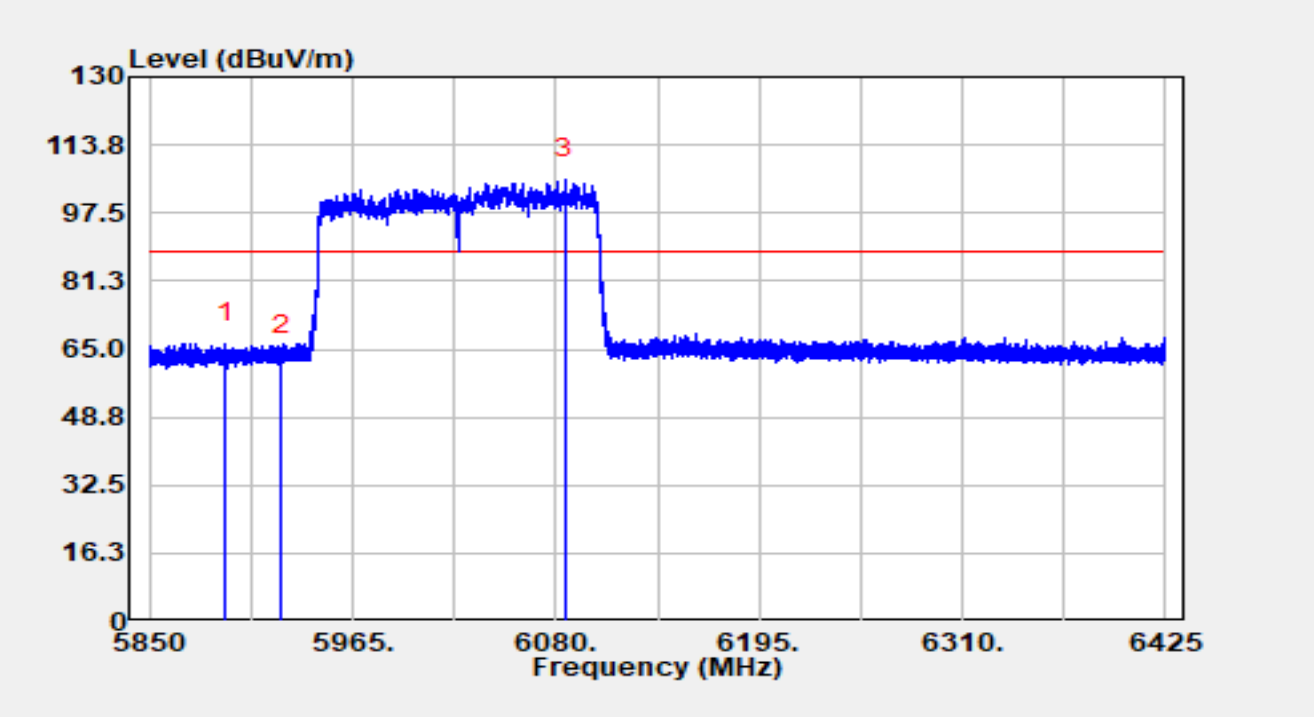


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5893.413 | 25.72 | 40.65 | 66.37 | -21.83 | 88.20 | Peak |
| 2 | | 5925.000 | 22.98 | 40.76 | 63.74 | -24.46 | 88.20 | Peak |
| 3 | | 6085.348 | 64.47 | 41.11 | 105.58 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT160 at 6025MHz | | |

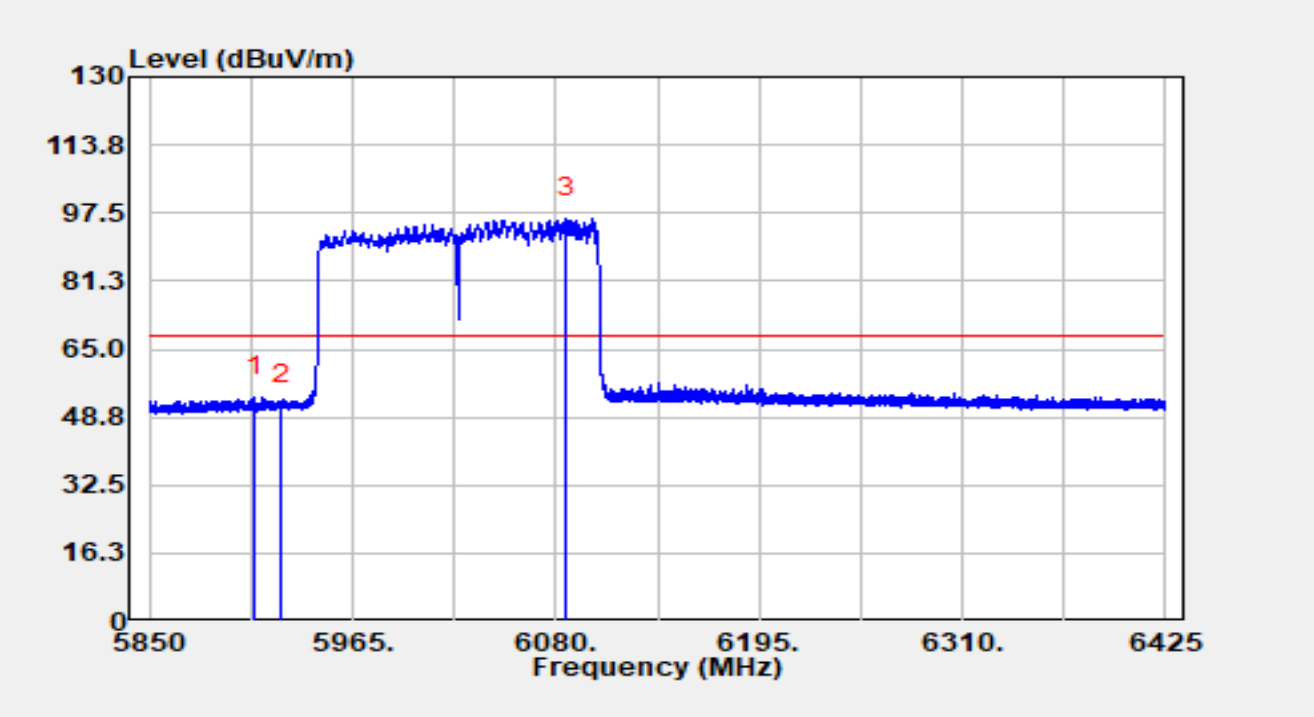


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5909.513 | 12.93 | 40.62 | 53.55 | -14.65 | 68.20 | Average |
| 2 | | 5925.000 | 10.80 | 40.76 | 51.56 | -16.64 | 68.20 | Average |
| 3 | | 6086.038 | 55.06 | 41.11 | 96.17 | N/A | N/A | Average |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT160 at 6985MHz | | |

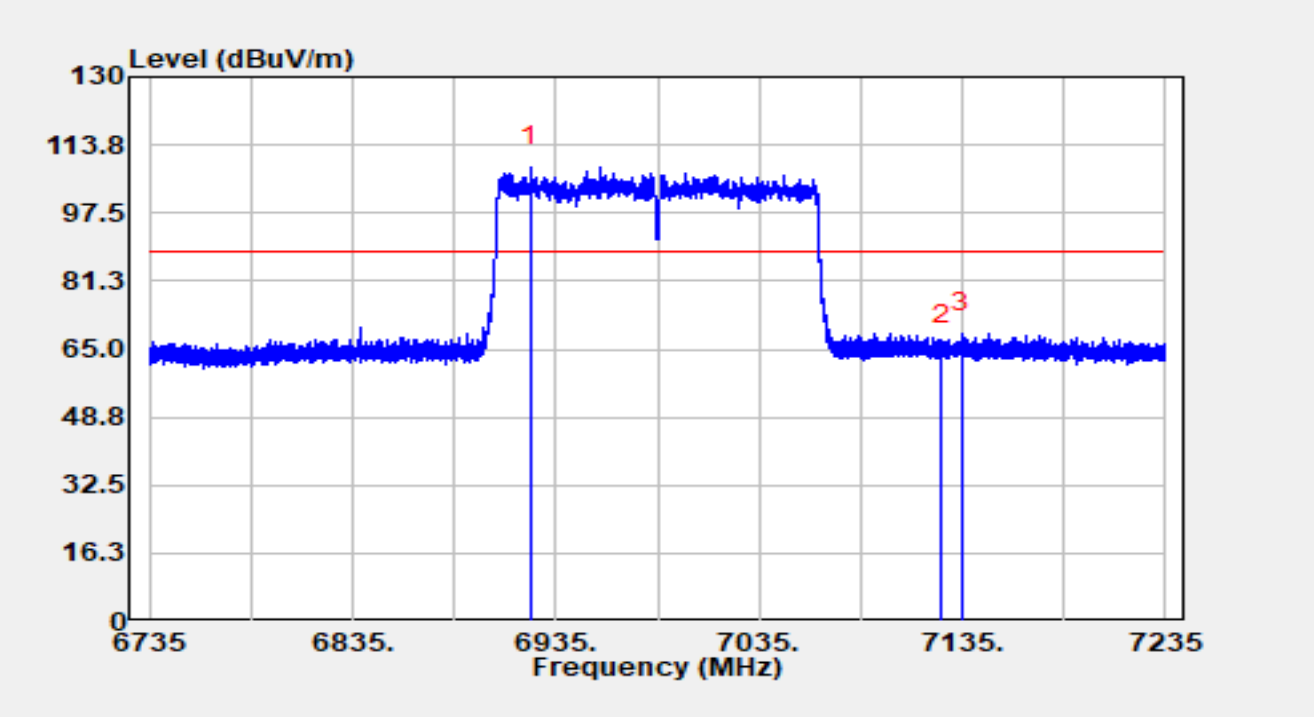


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6922.400 | 66.73 | 41.73 | 108.46 | N/A | N/A | Peak |
| 2 | | 7125.000 | 23.66 | 42.13 | 65.80 | -22.40 | 88.20 | Peak |
| 3 | * | 7134.850 | 26.63 | 42.21 | 68.84 | -19.36 | 88.20 | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT160 at 6985MHz | | |

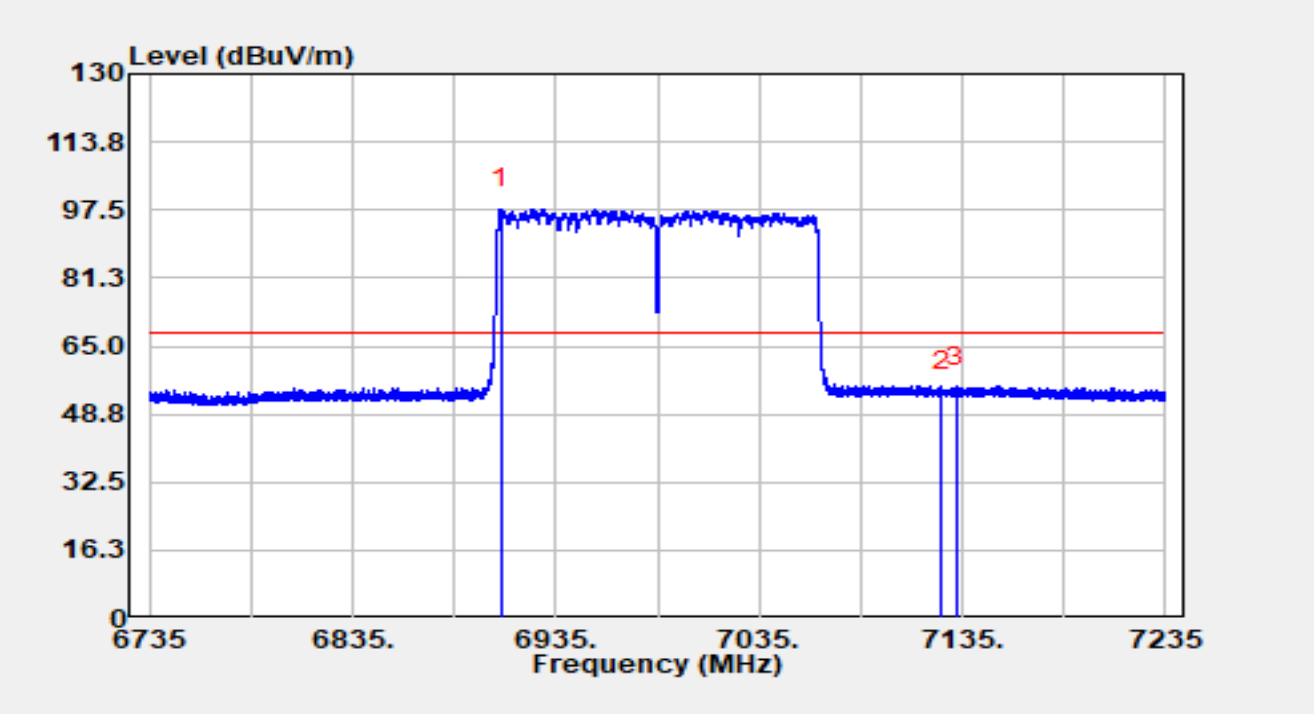


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6907.750 | 56.14 | 41.69 | 97.83 | N/A | N/A | Average |
| 2 | | 7125.000 | 12.25 | 42.13 | 54.39 | -13.81 | 68.20 | Average |
| 3 | * | 7132.050 | 13.07 | 42.19 | 55.26 | -12.94 | 68.20 | Average |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT160 at 6985MHz | | |

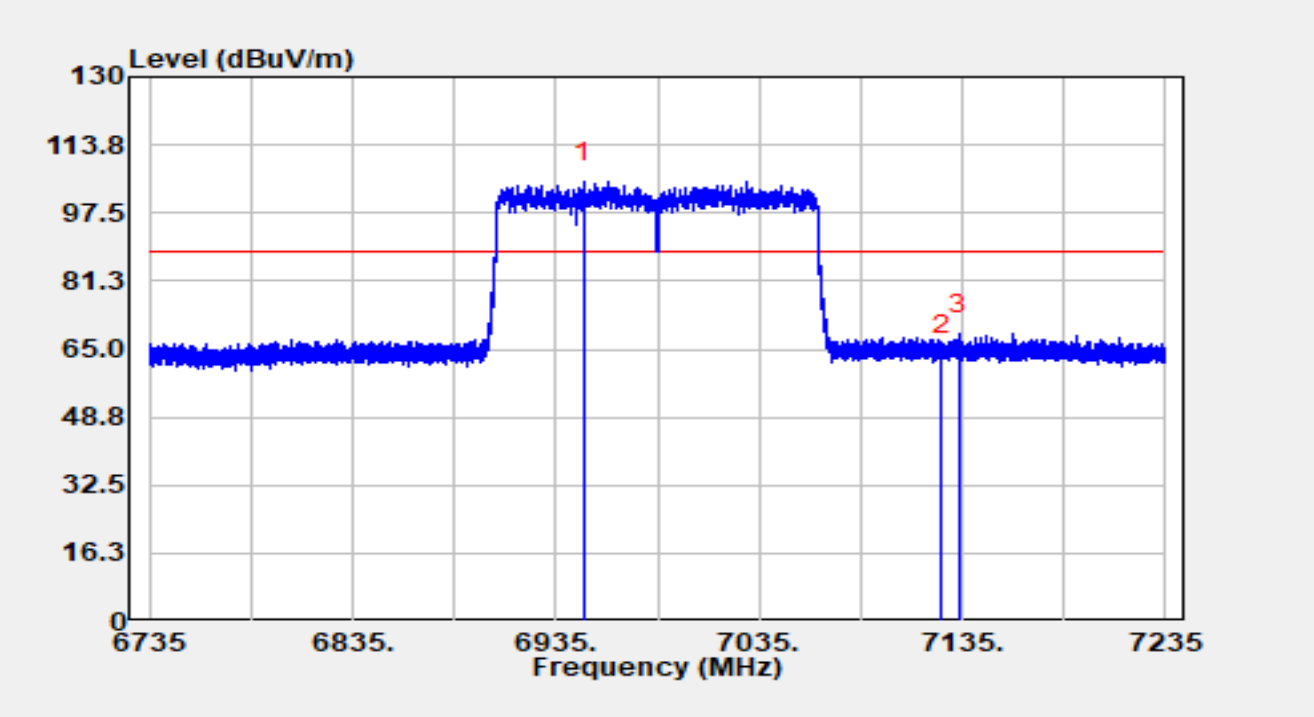


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6948.350 | 63.14 | 41.82 | 104.96 | N/A | N/A | Peak |
| 2 | | 7125.000 | 21.40 | 42.13 | 63.53 | -24.67 | 88.20 | Peak |
| 3 | * | 7133.100 | 26.30 | 42.19 | 68.50 | -19.70 | 88.20 | Peak |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT160 at 6985MHz | | |

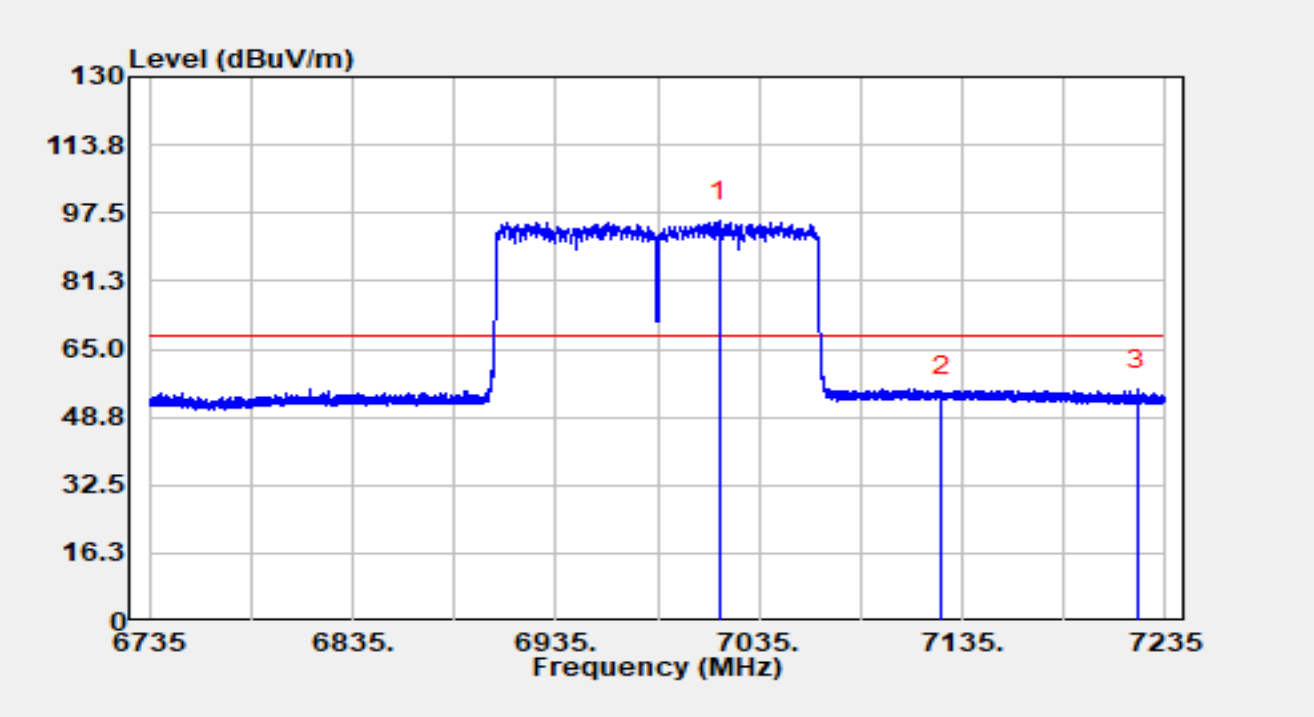


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 7015.600 | 53.47 | 41.97 | 95.44 | N/A | N/A | Average |
| 2 | | 7125.000 | 11.64 | 42.13 | 53.78 | -14.42 | 68.20 | Average |
| 3 | * | 7221.300 | 12.98 | 42.24 | 55.22 | -12.98 | 68.20 | Average |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-1 at 6105MHz | | |

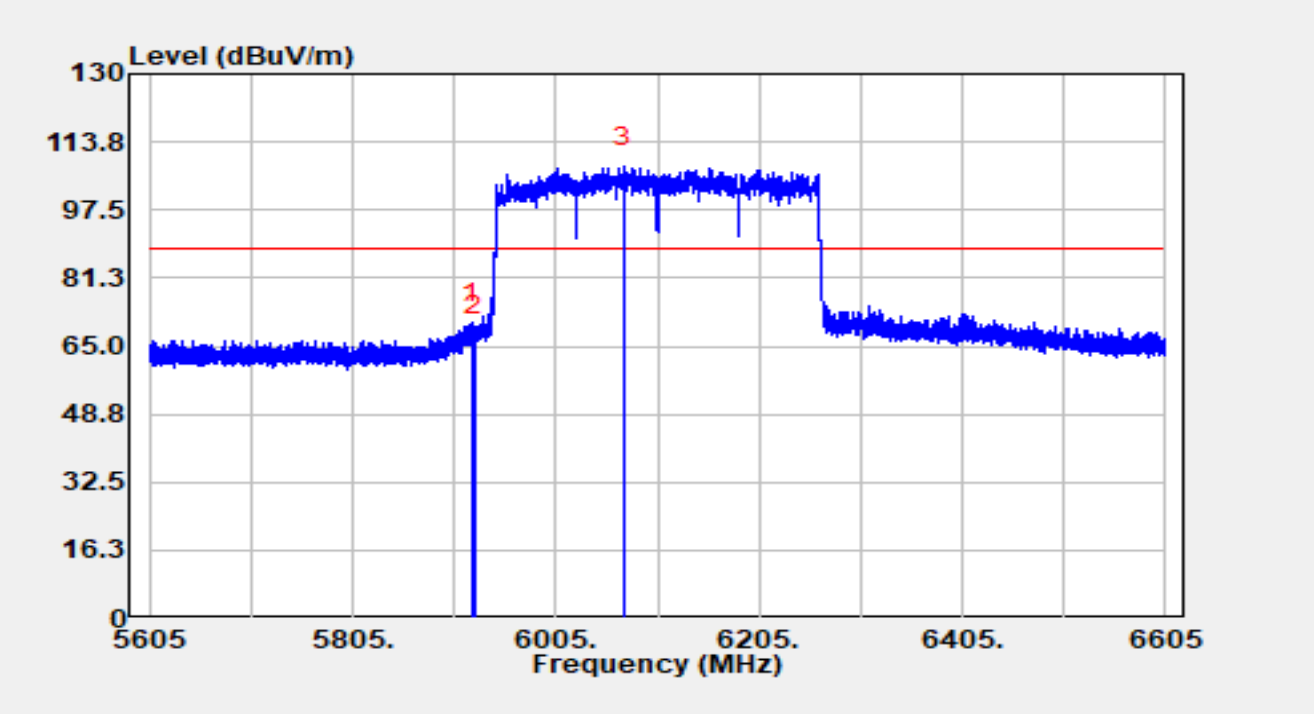


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5922.400 | 29.84 | 40.72 | 70.56 | -17.64 | 88.20 | Peak |
| 2 | | 5925.000 | 26.91 | 40.76 | 67.67 | -20.53 | 88.20 | Peak |
| 3 | | 6071.400 | 66.84 | 41.08 | 107.92 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-1 at 6105MHz | | |

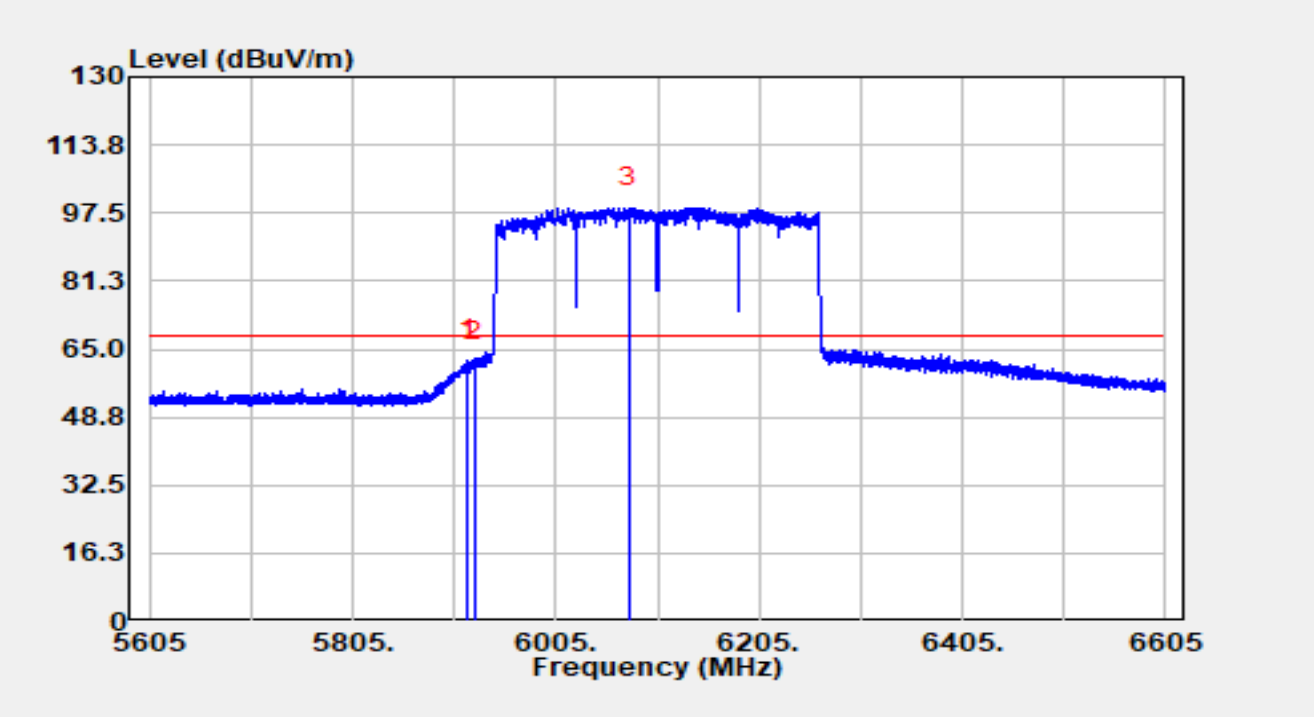


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5918.300 | 21.78 | 40.67 | 62.45 | -5.75 | 68.20 | Average |
| 2 | | 5925.000 | 21.14 | 40.76 | 61.89 | -6.31 | 68.20 | Average |
| 3 | | 6076.600 | 57.66 | 41.10 | 98.77 | N/A | N/A | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-1 at 6105MHz | | |

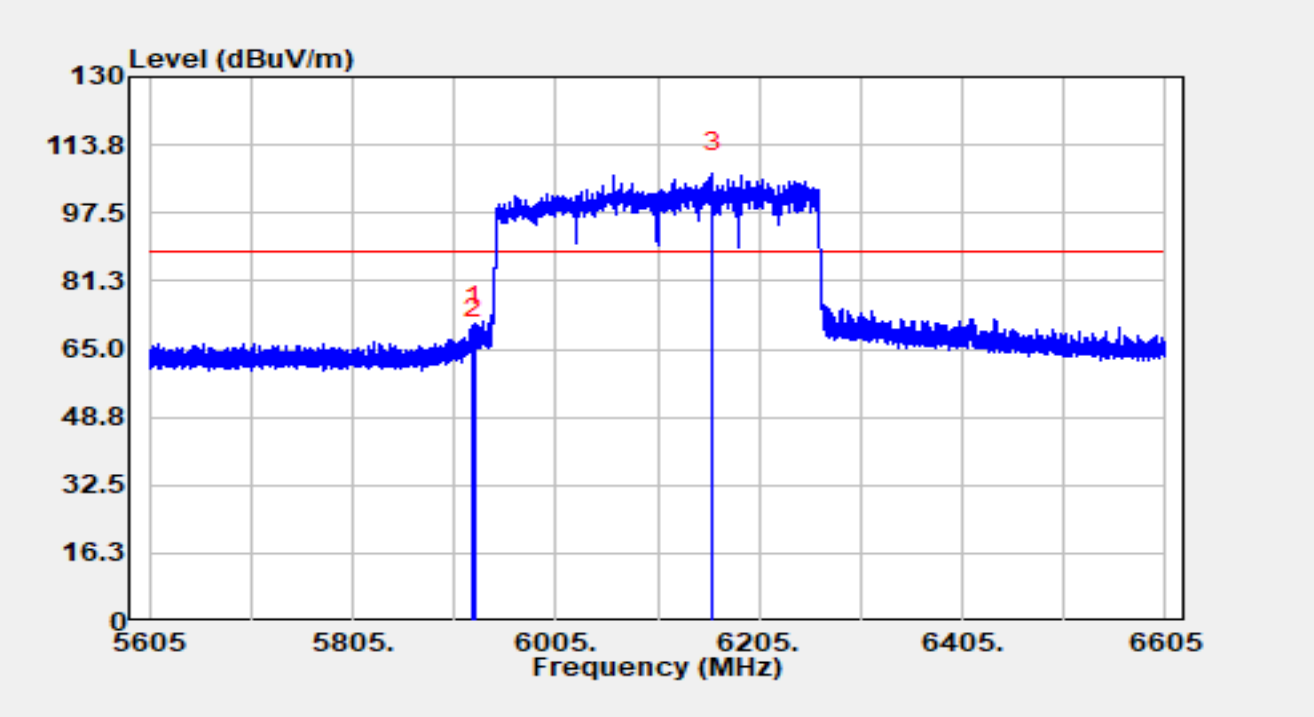


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5923.700 | 29.75 | 40.74 | 70.49 | -17.71 | 88.20 | Peak |
| 2 | | 5925.000 | 26.47 | 40.76 | 67.23 | -20.97 | 88.20 | Peak |
| 3 | | 6158.900 | 65.82 | 41.17 | 106.99 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-1 at 6105MHz | | |

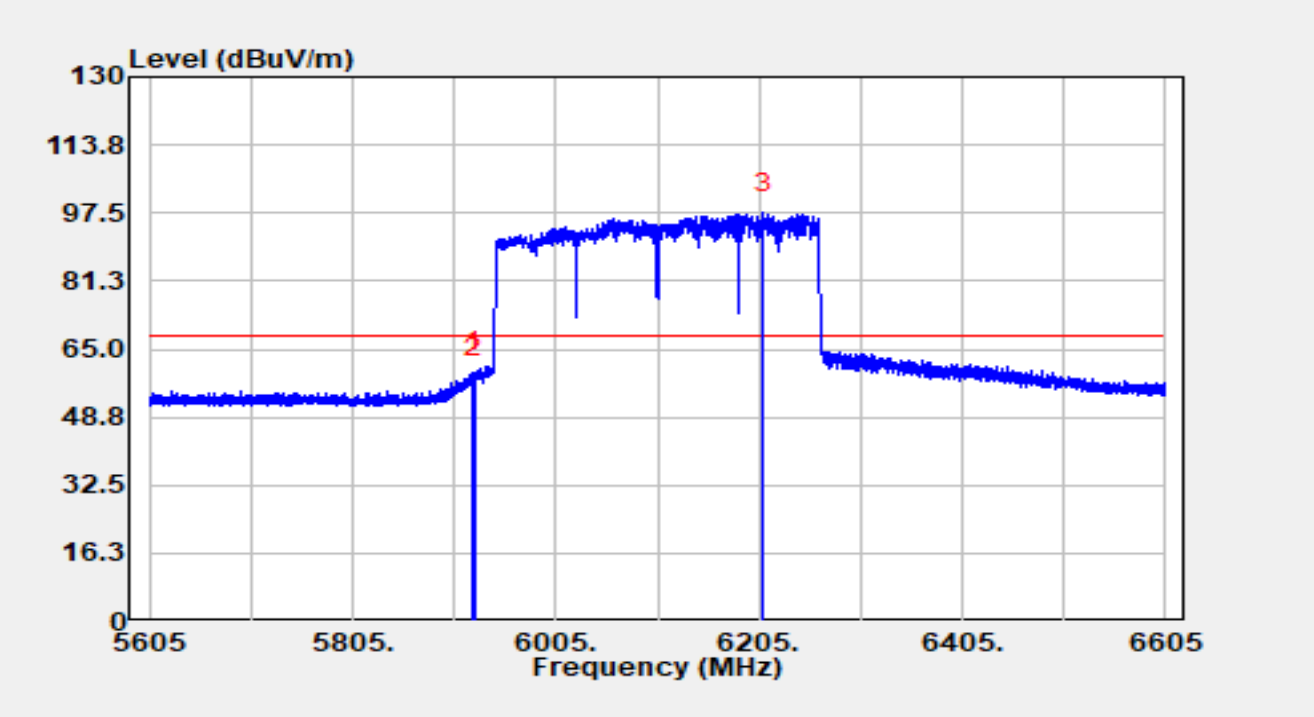


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5924.100 | 18.86 | 40.75 | 59.60 | -8.60 | 68.20 | Average |
| 2 | | 5925.000 | 17.46 | 40.76 | 58.22 | -9.98 | 68.20 | Average |
| 3 | | 6208.500 | 56.23 | 41.18 | 97.41 | N/A | N/A | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-1 at 6745MHz | | |

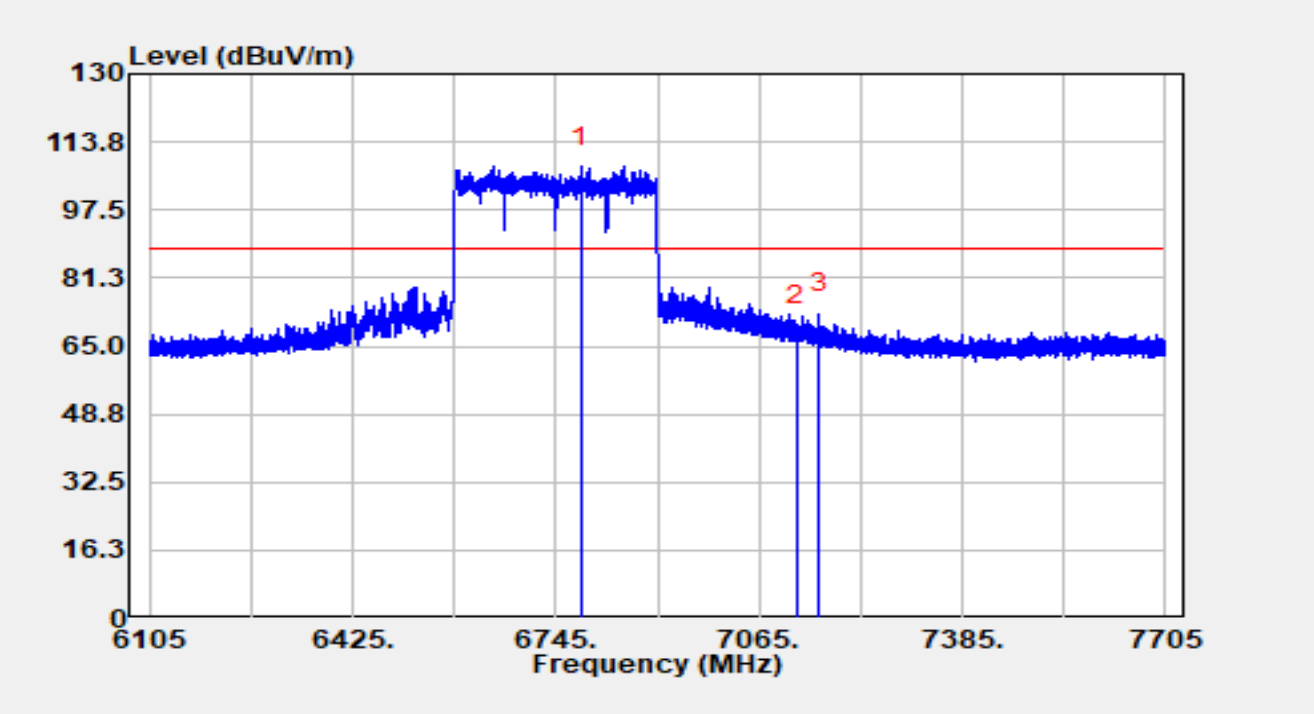


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6784.200 | 66.76 | 41.09 | 107.86 | N/A | N/A | Peak |
| 2 | | 7125.000 | 27.54 | 42.13 | 69.67 | -18.53 | 88.20 | Peak |
| 3 | * | 7159.720 | 30.48 | 42.23 | 72.71 | -15.49 | 88.20 | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-1 at 6745MHz | | |

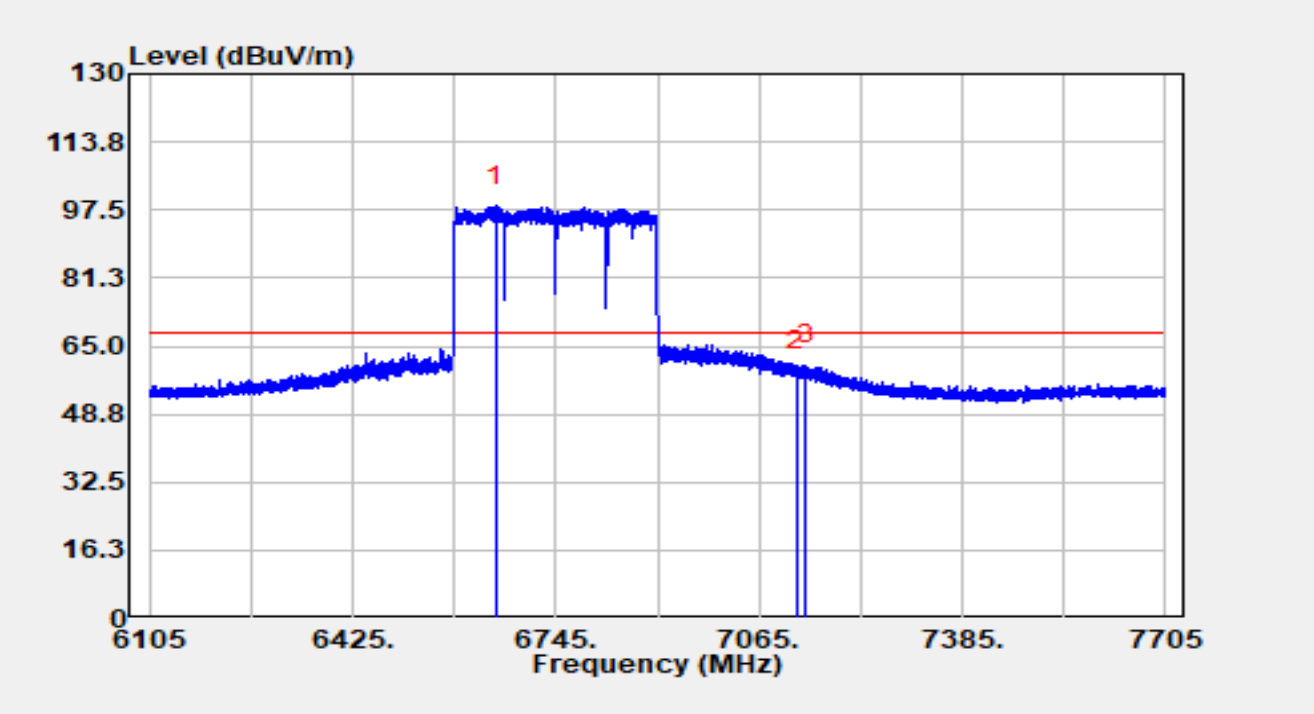


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6649.480 | 56.68 | 41.82 | 98.50 | N/A | N/A | Average |
| 2 | | 7125.000 | 17.09 | 42.13 | 59.23 | -8.97 | 68.20 | Average |
| 3 | * | 7138.760 | 18.28 | 42.23 | 60.51 | -7.69 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-1 at 6745MHz | | |

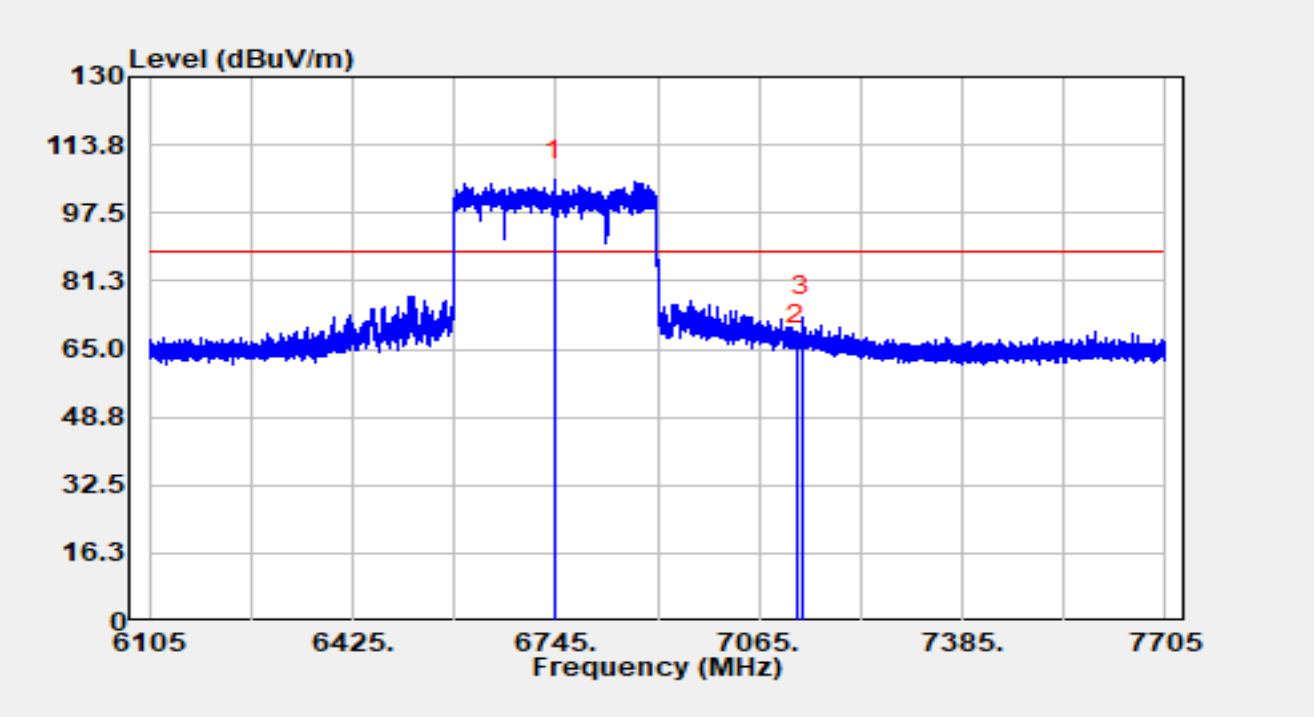


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6743.080 | 63.56 | 41.73 | 105.29 | N/A | N/A | Peak |
| 2 | | 7125.000 | 23.85 | 42.13 | 65.98 | -22.22 | 88.20 | Peak |
| 3 | * | 7133.320 | 30.52 | 42.20 | 72.72 | -15.48 | 88.20 | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-1 at 6745MHz | | |

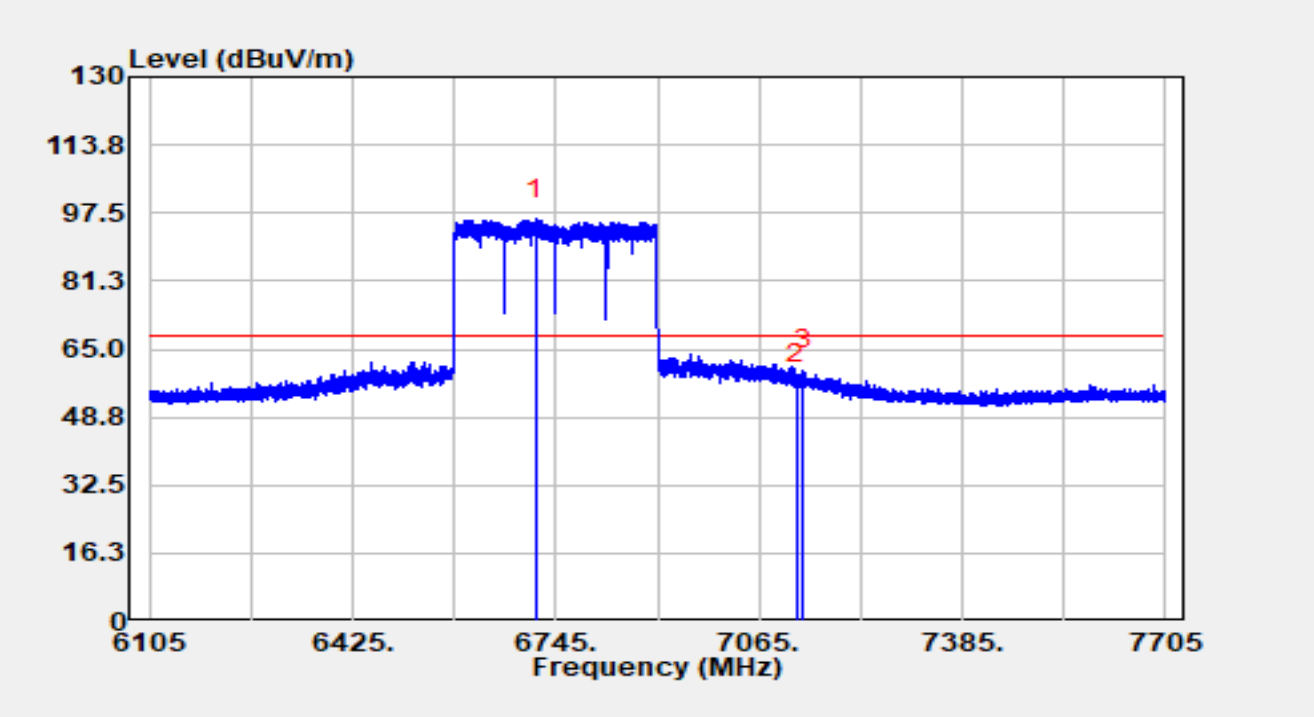


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6712.520 | 54.32 | 41.70 | 96.02 | N/A | N/A | Average |
| 2 | | 7125.000 | 14.45 | 42.13 | 56.58 | -11.62 | 68.20 | Average |
| 3 | * | 7133.960 | 17.73 | 42.20 | 59.93 | -8.27 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6265MHz | | |

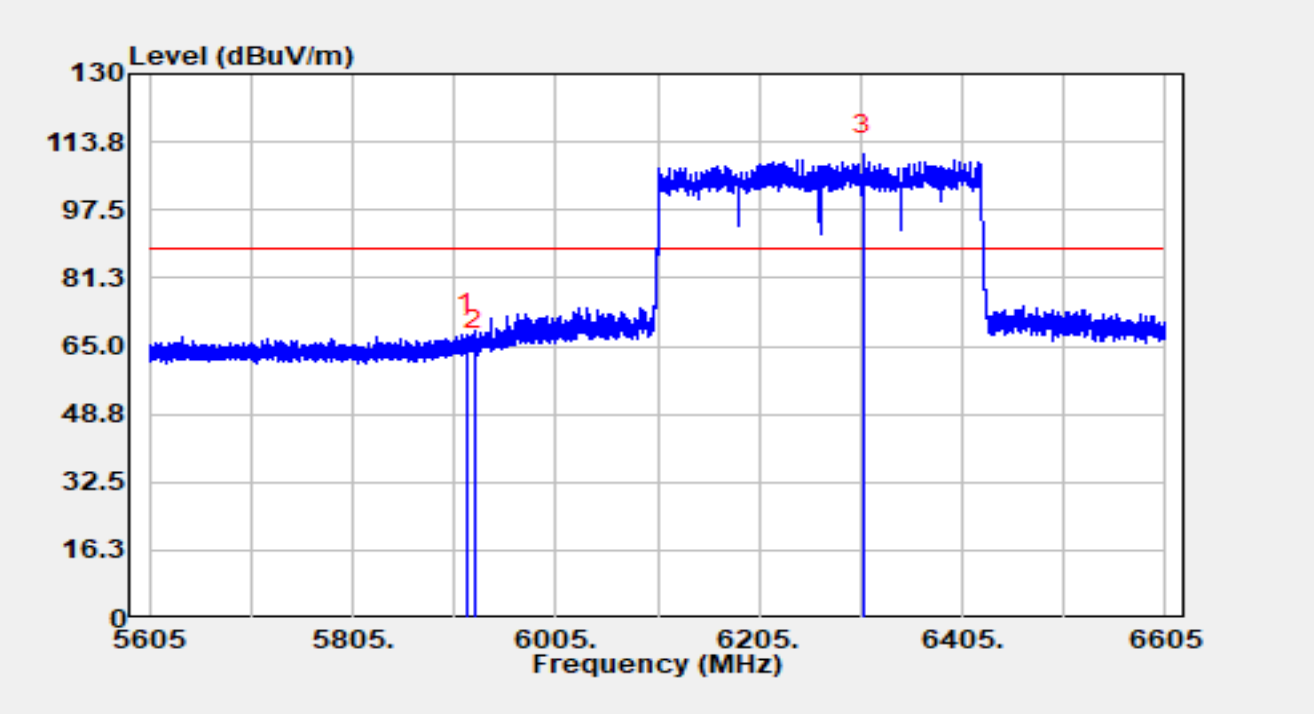


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5916.600 | 27.21 | 40.65 | 67.86 | -20.34 | 88.20 | Peak |
| 2 | | 5925.000 | 23.15 | 40.76 | 63.91 | -24.29 | 88.20 | Peak |
| 3 | | 6307.500 | 69.51 | 41.14 | 110.66 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6265MHz | | |

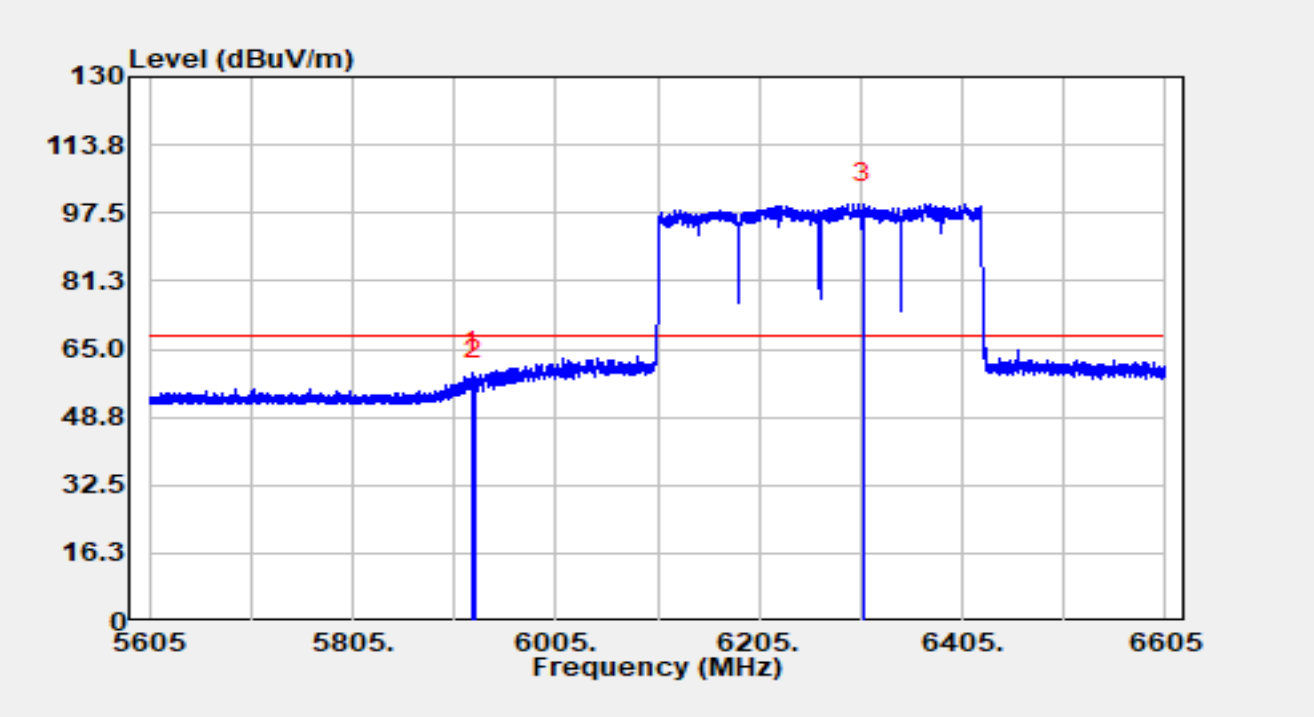


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5921.800 | 18.78 | 40.72 | 59.50 | -8.70 | 68.20 | Average |
| 2 | | 5925.000 | 16.76 | 40.76 | 57.52 | -10.68 | 68.20 | Average |
| 3 | | 6307.800 | 58.60 | 41.14 | 99.74 | N/A | N/A | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6265MHz | | |

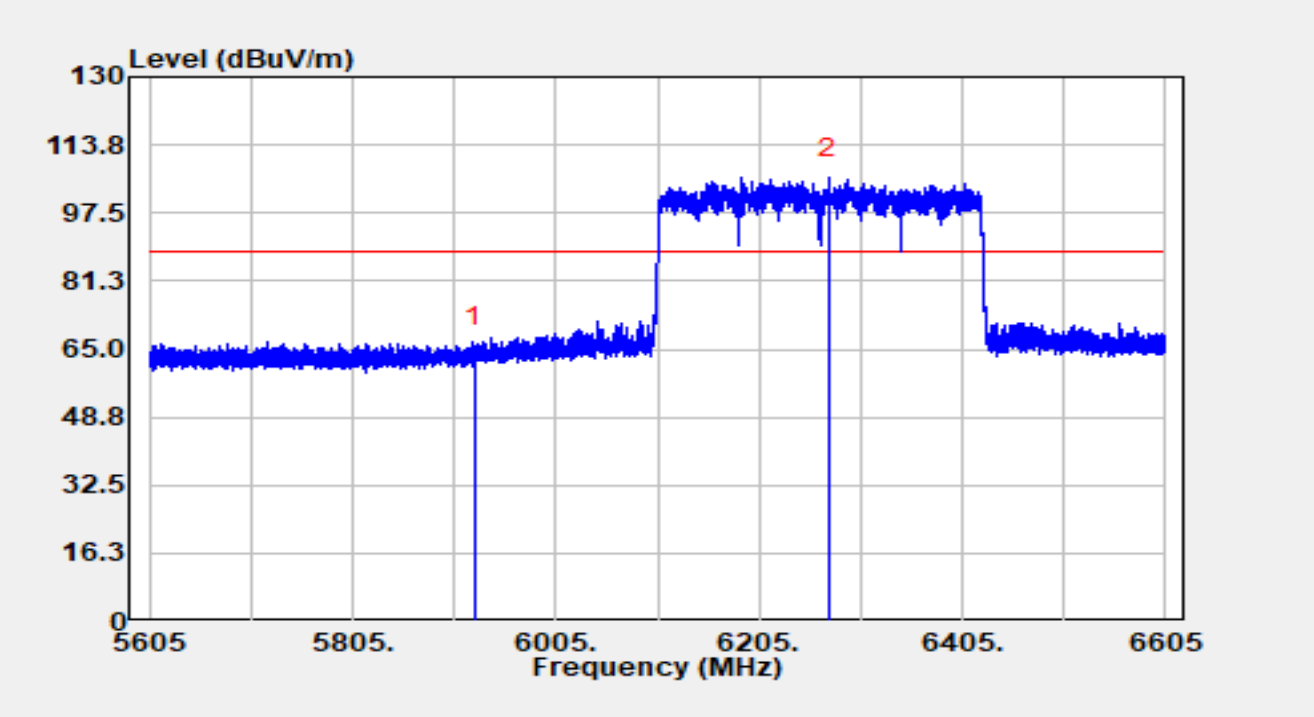


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5925.000 | 24.86 | 40.76 | 65.61 | -22.59 | 88.20 | Peak |
| 2 | | 6273.800 | 64.86 | 41.07 | 105.93 | N/A | N/A | Peak |

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6265MHz | | |

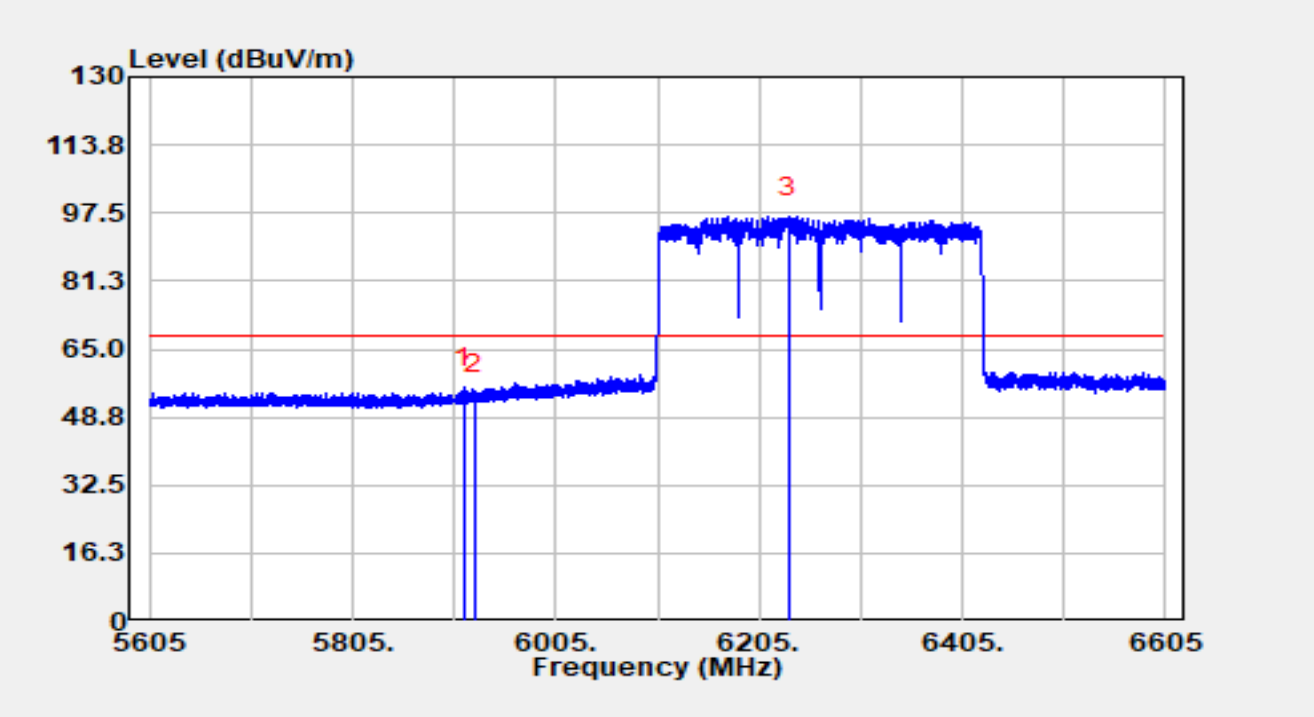


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | * | 5913.800 | 15.14 | 40.62 | 55.76 | -12.44 | 68.20 | Average |
| 2 | | 5925.000 | 13.38 | 40.76 | 54.13 | -14.07 | 68.20 | Average |
| 3 | | 6233.500 | 55.35 | 41.19 | 96.54 | N/A | N/A | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6905MHz | | |

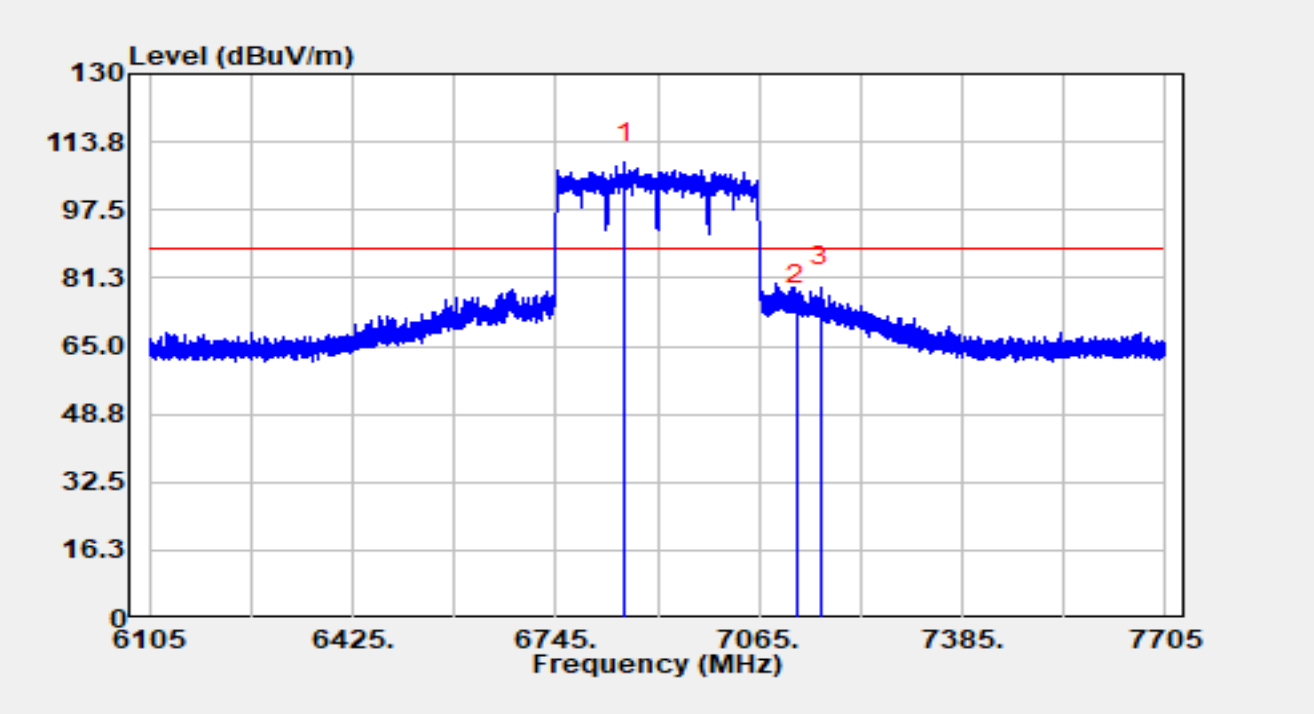


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6852.840 | 67.09 | 41.69 | 108.78 | N/A | N/A | Peak |
| 2 | | 7125.000 | 32.92 | 42.13 | 75.05 | -13.15 | 88.20 | Peak |
| 3 | * | 7161.160 | 36.83 | 42.23 | 79.06 | -9.14 | 88.20 | Peak |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Horizontal |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6905MHz | | |

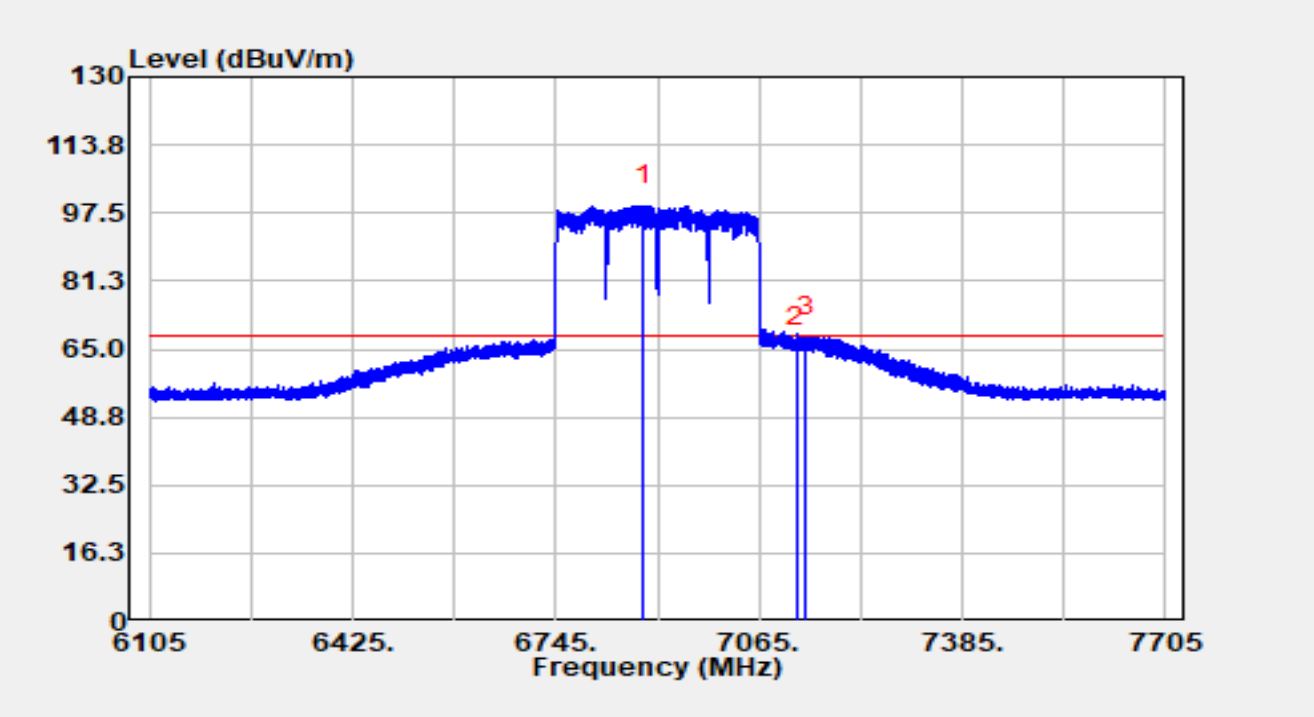


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6884.040 | 57.54 | 41.70 | 99.24 | N/A | N/A | Average |
| 2 | | 7125.000 | 23.56 | 42.13 | 65.70 | -2.50 | 68.20 | Average |
| 3 | * | 7139.240 | 25.69 | 42.23 | 67.91 | -0.29 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6905MHz | | |

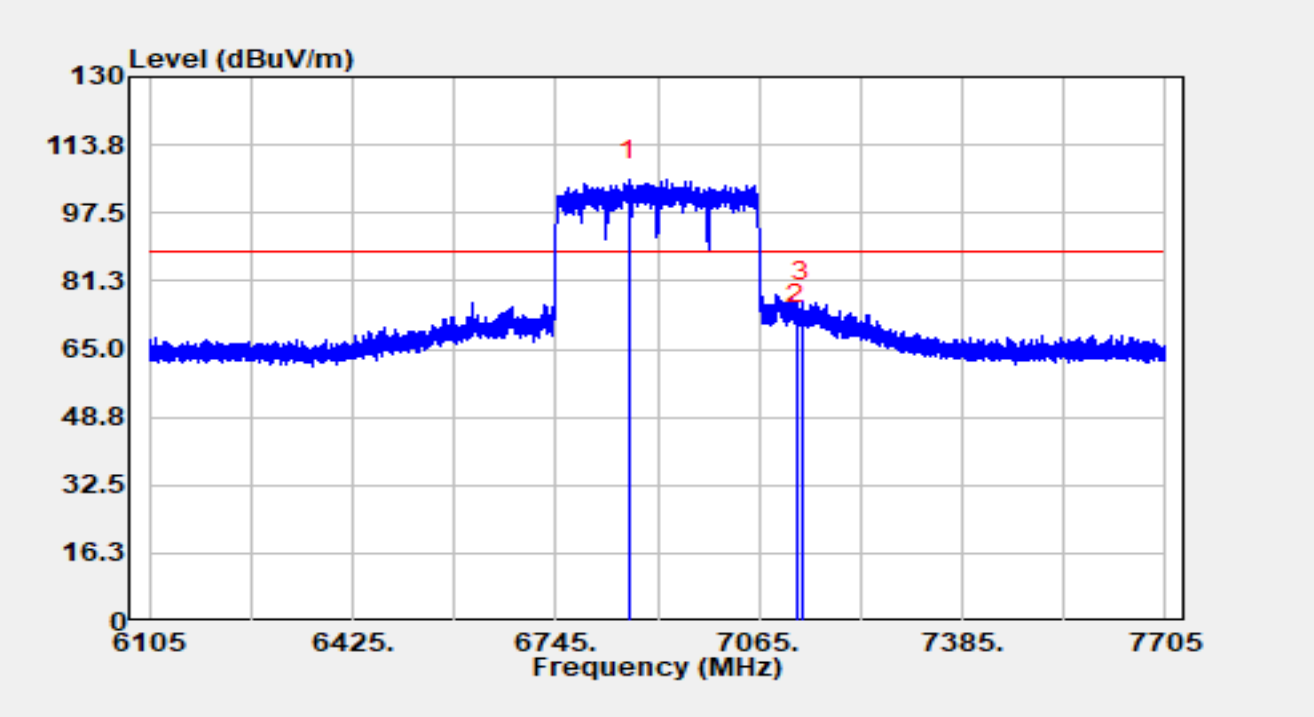


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6860.840 | 63.67 | 41.70 | 105.37 | N/A | N/A | Peak |
| 2 | | 7125.000 | 28.75 | 42.13 | 70.89 | -17.31 | 88.20 | Peak |
| 3 | * | 7133.160 | 34.19 | 42.19 | 76.39 | -11.81 | 88.20 | Peak |

Notes:

1. “ * “, means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

| | | | |
|---|---|---|---|
| Site | SIP-AC3 | Test Date | 2025-04-10 |
| Temperature | 22.3°C | Humidity | 49.3% |
| Limit | FCC_Part15_Band Edge(3m)_6G | Test Engineer | Justin Guo |
| Factor | HF907_102861 | Polarity | Vertical |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6905MHz | | |

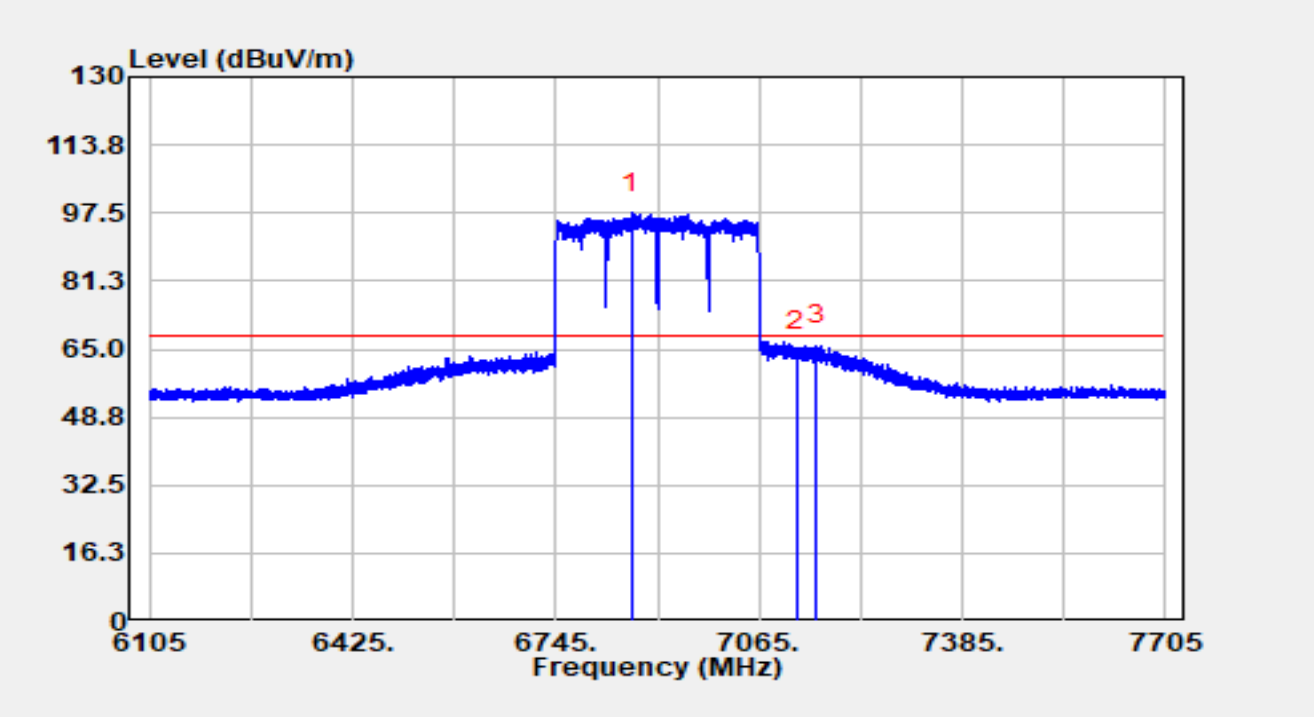


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 6864.040 | 55.87 | 41.70 | 97.57 | N/A | N/A | Average |
| 2 | | 7125.000 | 22.56 | 42.13 | 64.69 | -3.51 | 68.20 | Average |
| 3 | * | 7155.880 | 23.53 | 42.25 | 65.78 | -2.42 | 68.20 | Average |

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### A.10 AC Conducted Emissions Test Result

| | | | |
|---|---|---|---|
| Site | SIP-SR2 | Test Date | 2025-04-18 |
| Temperature | 24.9 °C | Humidity | 51.1 % |
| Limit | FCC Part 15.207_CE_Mains | Test Engineer | Henry Wang |
| Factor | ENV216_101684_C | Polarity | Line |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6265MHz | | |

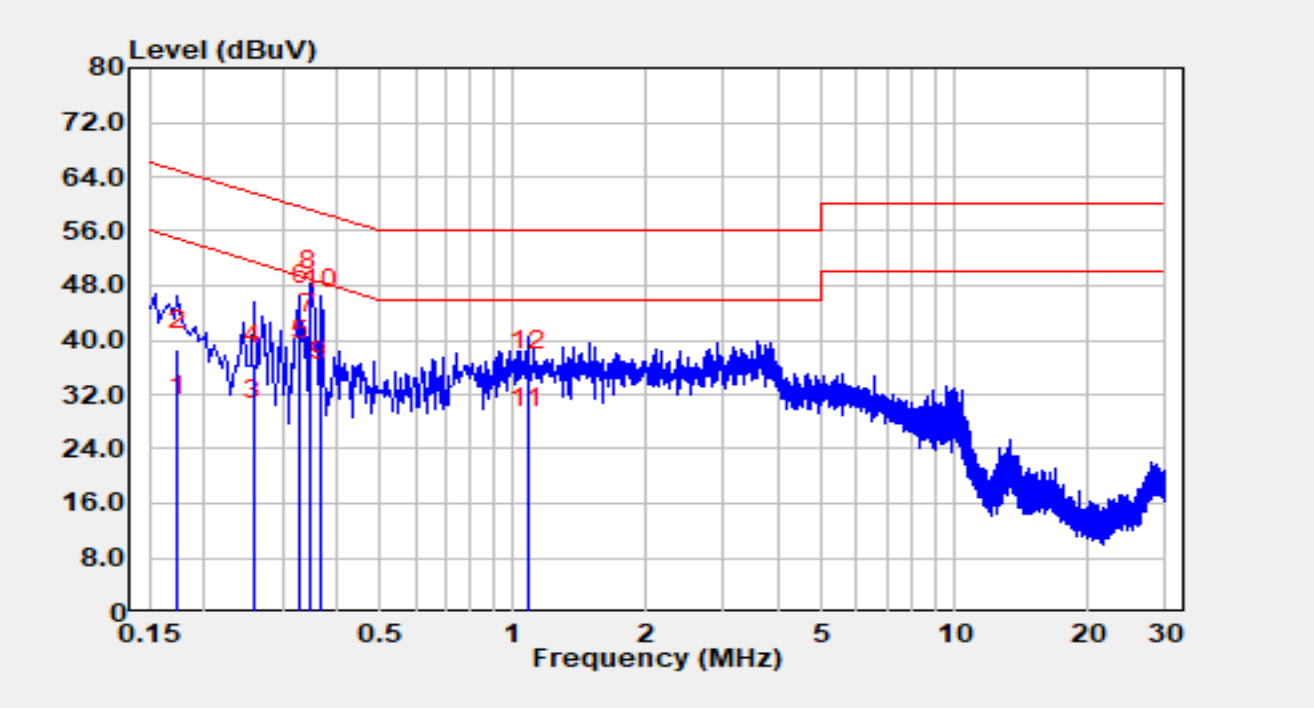


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 0.174 | 19.27 | 9.66 | 28.93 | -25.84 | 54.77 | Average |
| 2 | | 0.174 | 28.87 | 9.66 | 38.53 | -26.24 | 64.77 | QP |
| 3 | | 0.258 | 18.39 | 9.72 | 28.11 | -23.38 | 51.50 | Average |
| 4 | | 0.258 | 26.66 | 9.72 | 36.38 | -25.12 | 61.50 | QP |
| 5 | | 0.330 | 27.27 | 9.74 | 37.01 | -12.44 | 49.45 | Average |
| 6 | | 0.330 | 35.34 | 9.74 | 45.08 | -14.37 | 59.45 | QP |
| 7 | * | 0.346 | 31.31 | 9.73 | 41.05 | -8.02 | 49.06 | Average |
| 8 | | 0.346 | 37.62 | 9.73 | 47.36 | -11.71 | 59.06 | QP |
| 9 | | 0.366 | 24.35 | 9.73 | 34.08 | -14.51 | 48.59 | Average |
| 10 | | 0.366 | 34.86 | 9.73 | 44.59 | -14.00 | 58.59 | QP |
| 11 | | 1.078 | 17.27 | 9.74 | 27.01 | -18.99 | 46.00 | Average |
| 12 | | 1.078 | 25.70 | 9.74 | 35.44 | -20.56 | 56.00 | QP |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

| | | | |
|---|---|---|---|
| Site | SIP-SR2 | Test Date | 2025-04-18 |
| Temperature | 24.9 °C | Humidity | 51.1 % |
| Limit | FCC Part 15.207_CE_Mains | Test Engineer | Henry Wang |
| Factor | ENV216_101684_C | Polarity | Neutral |
| EUT | Giga Hub 2.0 | Test Voltage | AC 120V/60Hz |
| Test Mode | Transmit by 802.11be-EHT320-2 at 6265MHz | | |

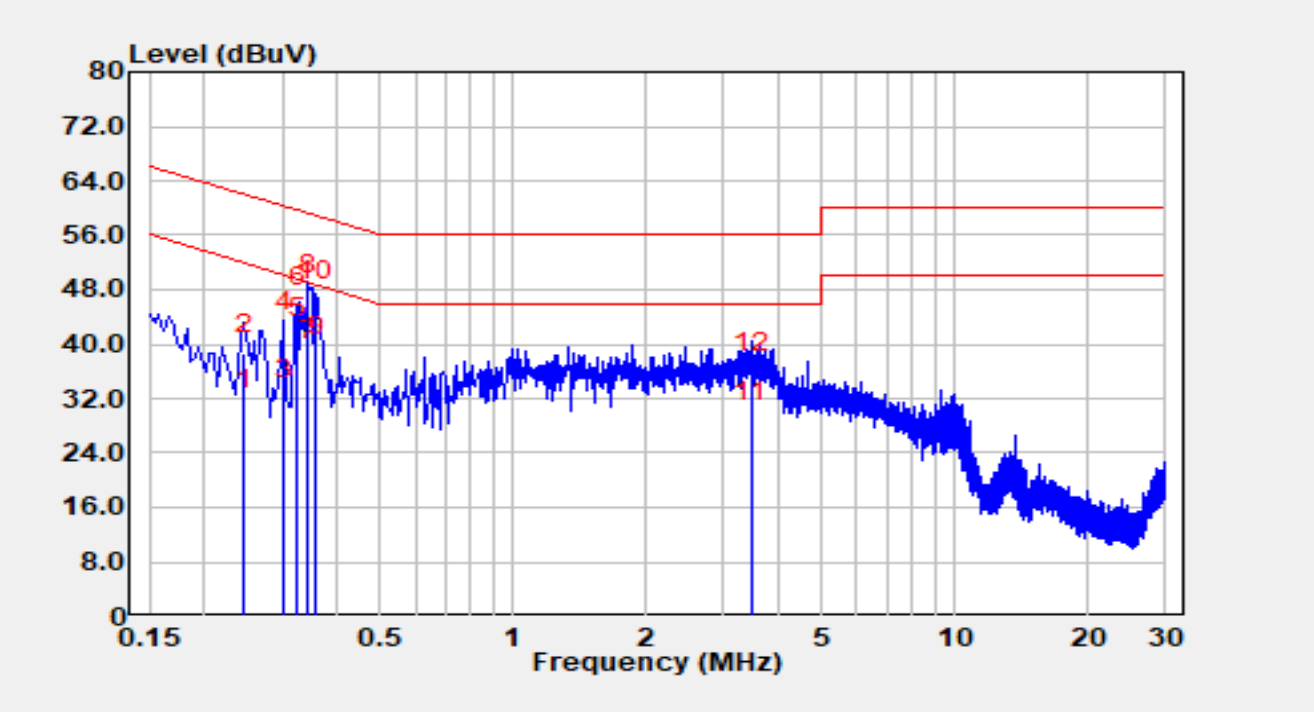


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|---|---|---|---|---|---|---|---|---|
| 1 | | 0.246 | 20.59 | 9.74 | 30.33 | -21.56 | 51.89 | Average |
| 2 | | 0.246 | 28.87 | 9.74 | 38.61 | -23.28 | 61.89 | QP |
| 3 | | 0.302 | 22.18 | 9.75 | 31.93 | -18.25 | 50.19 | Average |
| 4 | | 0.302 | 32.07 | 9.75 | 41.82 | -18.36 | 60.19 | QP |
| 5 | * | 0.325 | 31.03 | 9.76 | 40.79 | -8.78 | 49.57 | Average |
| 6 | | 0.325 | 35.78 | 9.76 | 45.54 | -14.03 | 59.57 | QP |
| 7 | | 0.342 | 27.80 | 9.76 | 37.55 | -11.60 | 49.15 | Average |
| 8 | | 0.342 | 37.46 | 9.76 | 47.21 | -11.94 | 59.15 | QP |
| 9 | | 0.358 | 28.36 | 9.75 | 38.11 | -10.66 | 48.77 | Average |
| 10 | | 0.358 | 36.67 | 9.75 | 46.42 | -12.35 | 58.77 | QP |
| 11 | | 3.454 | 18.76 | 9.85 | 28.62 | -17.38 | 46.00 | Average |
| 12 | | 3.454 | 25.81 | 9.85 | 35.66 | -20.34 | 56.00 | QP |

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

## Appendix B – Test Setup Photograph

Refer to “R25S1048034-UT” file.

## Appendix C – EUT Photograph

Refer to “R25S1048034-UE” file.

The End