



LCIE



Accreditation
N°1-0312
Scope available on
www.cofrac.fr

TEST REPORT

N°: 157205 - 726502

Version : 02

Subject

Electromagnetic compatibility (EMC) :
Publication CFR 47 PART 15 of 2013 & ICES-003 of 2016

Issued to

SAGEMCOM BROADBAND SAS
250 Route de l' Empereur
92500 – RUEIL MALMAISON
FRANCE

Apparatus under test

- ↗ Product
- ↗ Trade mark
- ↗ Manufacturer
- ↗ Model under test
- ↗ Serial number

Sound Box
Sagemcom®
SAGEMCOM
Sound Box SBDV01
253770742

Test date

September 24, 2018 to September 25, 2018

Test location

LCIE, Fontenay Aux Roses

Test performed by

Steve Bogler

Composition of document

20 pages

Document issued on

November 19, 2018

Written by :
Steve Bogler
Tests operator



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measurement. This document doesn't anticipate any certification decision. The COFRAC accreditation attests the technical capability of the testing laboratory for the only tests covered by the accreditation. If some tests mentioned in this report are carried out outside the framework of COFRAC accreditation, they are indicated by an asterisk (*).

LCIE

Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

33, Av du Général Leclerc
92266 Fontenay Aux Roses
FRANCE

Tél : +33 1 40 95 60 60
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	October 9, 2018	Steve Bogler	Creation of the document
02	November 19, 2018	Steve Bogler	Customer request withdraw all picture of the EUT from test report. Add measurement above 6GHz and test set up picture



SUMMARY

1.	TEST PROGRAM.....	4
2.	EQUIPMENT DESCRIPTION (DECLARED BY PROVIDER).....	5
3.	MEASUREMENT OF RADIATED EMISSIONS	7
4.	MEASUREMENT OF CONDUCTED DISTURBANCE.....	14
5.	UNCERTAINTIES CHART.....	20



1. Test Program

References

- ✓ CFR 47 Part 15 Subpart B - Radio frequency devices - Unintentional radiators October 2013
- ✓ ICES -003 of 2016
- ✓ ANSI 63.4 of 2014

Emission tests:

Test Description	Main characteristics	Test result - Comments
Measurement of radiated electric field in shielded room 15.109 (a) & (c)	☐ Class A ☒ Class B	☒ PASS ☐ FAIL ☐ NA ☐ NP (Limited Program)
Measurement of radiated electric field in open space	☐ Class A ☐ Class B	☐ PASS ☐ FAIL ☒ NA ☐ NP (Limited Program)
Measurement of conducted disturbance on the AC main power port 15.107 (a) (c) (d)	☐ Class A ☒ Class B	☒ PASS ☐ FAIL ☐ NA ☐ NP (Limited Program)

The product is compliant according to CFR 47 Part 15 Subpart B - Radio frequency devices - Unintentional radiators October 2013 & ICES -003 of 2016 standards.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed



2. Equipment Description (declared by provider)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT): Sound Box SBDV01
Power supply : NBC80A200400M2

Serial Number: 253770742

Inputs/outputs - Cable:

Access	Inputs / Outputs	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Main power supply	Input	L1-N	-	-	☐	☒	-
Network	Input	RJ45	-	-	☐	☒	-

Auxiliary equipment used during test:


Type	Reference	Sn	Comments
LAPTOP	-	-	-

Equipment information: (Declared by provider)

Apparatus Description	EUT Description			
Type of power source:	☒ AC power supply	☐ DC power supply	☐ Battery (Select Type)	
Test source voltage:	Vmin-Vmax:	☐ 100 - 240 V / 50 - 60 Hz	☐ Vnom VDC	
Operating Modes	Mode 1	ON		



2.2. EQUIPMENT LABELLING

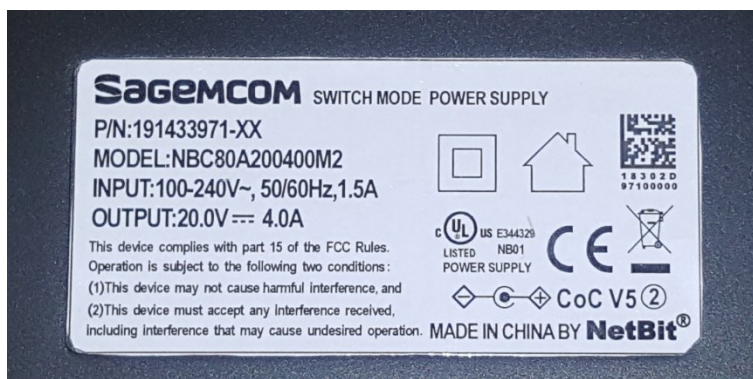

Factory S/N Code barre type 128	Code barre type 128		LISTED I.T.E. E308616	Sagemcom Sound Box SBDV01 253770742-ind 20V --- 4A Date Code: WW/YY SSID : amplify-CCDDEE Made in CZECH Republic
	MSO Part Number: 12345			
	Code barre type 128			
	SGC S/N: 123456789012			
	MAC Address : aa:bb:cc:dd:ee	FCC ID: VW3SBDV01	Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio and the double-D symbol are trademarks of Dolby Laboratories.	
	TYM S/N : XXXXXXXXX			

Equipment Labelling

2.3. EQUIPMENT MODIFICATIONS

☒ None ☐ Modification:



3. Measurement of radiated emissions

3.1. ENVIRONMENTAL CONDITIONS

Test performed by : **Steve Bogler**
Date of test : September 25, 2018
Ambient temperature : 20°C
Relative humidity : 38%

3.2. TEST SETUP

Specifications:

Frequency	30 – 1000 MHz	RBW 120 kHz
	1-40GHz	RBW 1MHz
Detector	Peak and Quasi-Peak	

Pre characterization in semi anechoic room is performed to define the critical frequencies

Operating conditions:

- The Equipment under Test is installed:

- ☒ Measure in semi anechoic room
☐ Measure in open area site

- Measuring distance:

- ☒ 3m
☐ 10m

- Deviation method:


- ☐ Yes
☒ No

-Product installation:


- ☒ The EUT was tested as a tabletop equipment and was placed on a non-conducting platform the top of which is 0.8m above the metal ground plane.
☐ The EUT is at 10cm height from reference plane

Operating mode:


- ☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ...

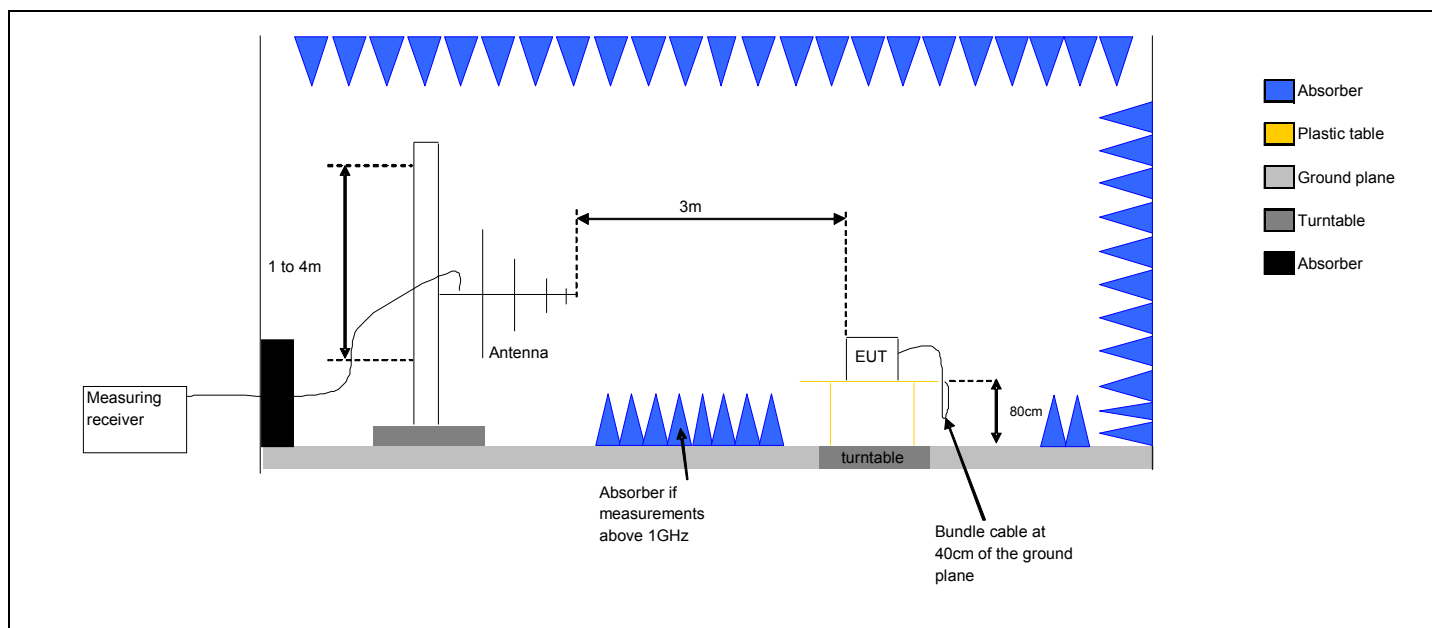

Test Set up for radiated measurement in semi anechoic chamber

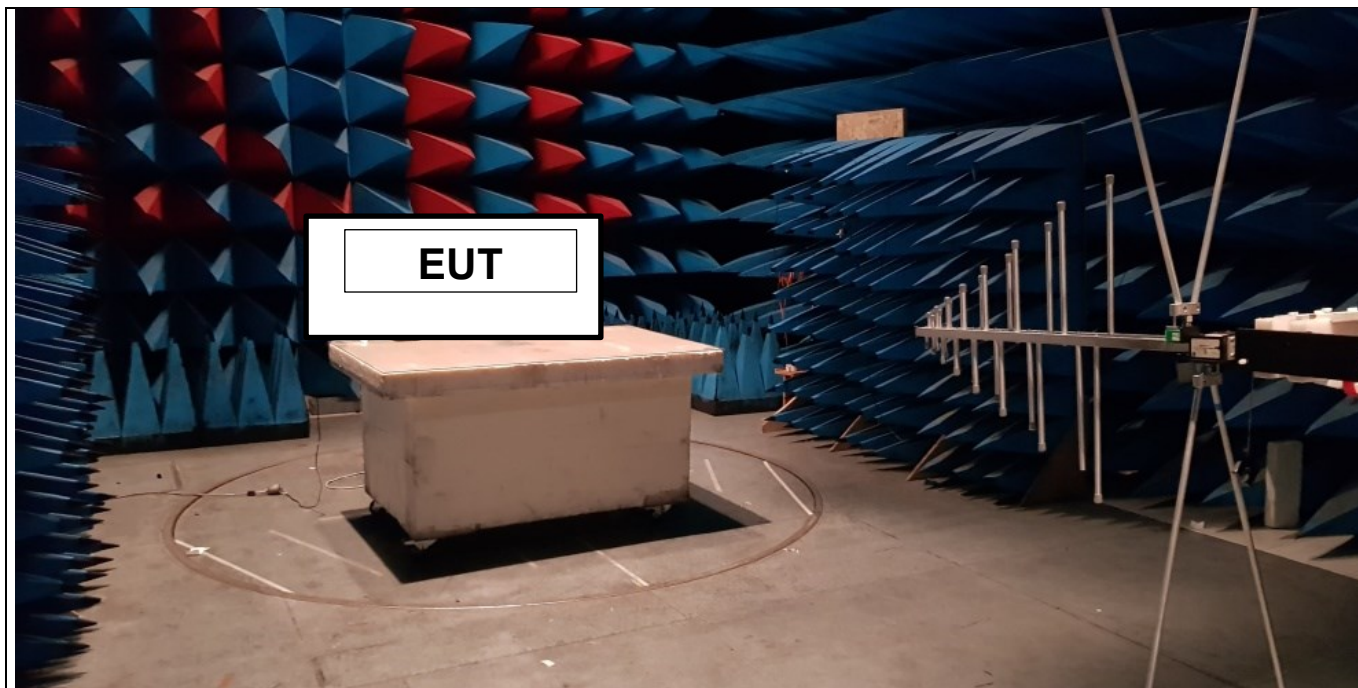

Measurement of radiated disturbances.

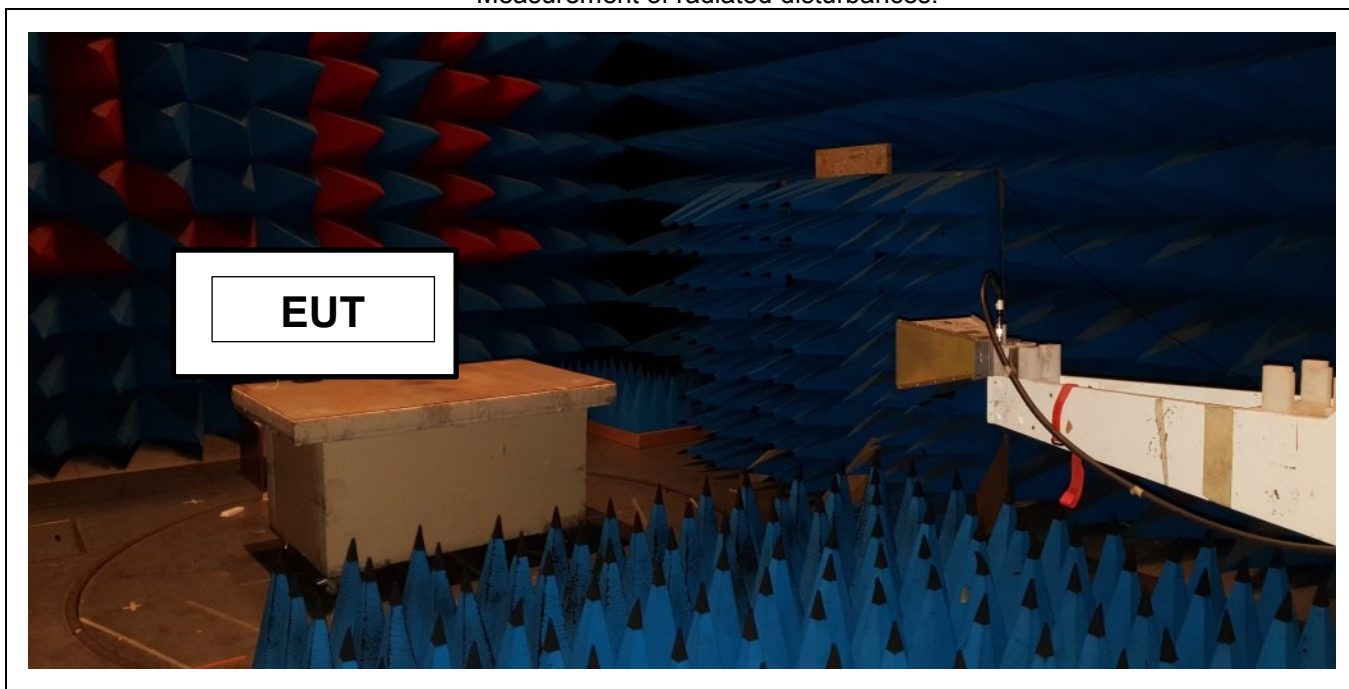

Measurement of radiated disturbances.



3.3. LIMIT

☐ at 3m Class A

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) peak	dB (μV/m) average
30-88MHz	49.5	-	-
88 – 216MHz	53.9	-	-
216 – 960 MHz	56.9	-	-
960 – 1000 MHz	60	-	-
1000-40000MHz	-	80	60

☒ at 3m Class B

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) peak	dB (μV/m) average
30-88MHz	40	-	-
88 – 216MHz	43.5	-	-
216 – 960 MHz	46	-	-
960 – 1000 MHz	53.9	-	-
1000-40000MHz	-	73.9	53.9

☐ at 10m Class A

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) peak	dB (μV/m) average
30-88MHz	39.5	-	-
88 – 216MHz	43.9	-	-
216 – 960 MHz	46.9	-	-
960 – 1000 MHz	50	-	-
1000-40000MHz	-	70	50

☐ at 10m Class B

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) peak	dB (μV/m) average
30-88MHz	30	-	-
88 – 216MHz	33.5	-	-
216 – 960 MHz	36	-	-
960 – 1000 MHz	43.9	-	-
1000-40000MHz	-	63.9	43.9





3.4. TEST EQUIPMENT LIST

Description	Constructor	Model	N°	Cal. Date	Cal. Due
Bilog antenna	SCHWARZBECK	VULB9160	C2040150	2018/04	2019/04
Cable	-	-	A5329711	2017/06	2018/07*
Horn antenna	A-infoMW	Broadband 1-18	C2042056	2016/07	2018/07
Horn antenna (18-26,5GHz)	PASTERNAK	PE9852/2F-20	C2042049	2017/12	2019/12
Horn antenna (26,5-40GHz)	PASTERNAK	PE9852/2F-20	C2042052	2018/03	2020/03
SEMI ANECHOIC CHAMBER	SIEPEL	ANE	D3044008	2014/09	2018/09
EMI Receiver	ROHDE & SCHWARZ	ESU26	A2642018	2016/10	2018/10
EMI receiver	ROHDE & SCHWARZ	ESI40 1088 740K40	A2642010	2016/07	2018/07*
Preamplifier	LCIE	-	A7086012	2018/03	2019/03
Preamplifier	LCIE	LCIE-ALB-001	A7080073	2018/08	2020/08
Cable	-	-	A5329360	-	-
AC power supply	ADAPTIVE POWER SYSTEM	FC210	A7360017	-	-
*Note : In our quality system, the test equipment calibration due is more or less 2 month					

3.5. RESULTS

Diagram N°1

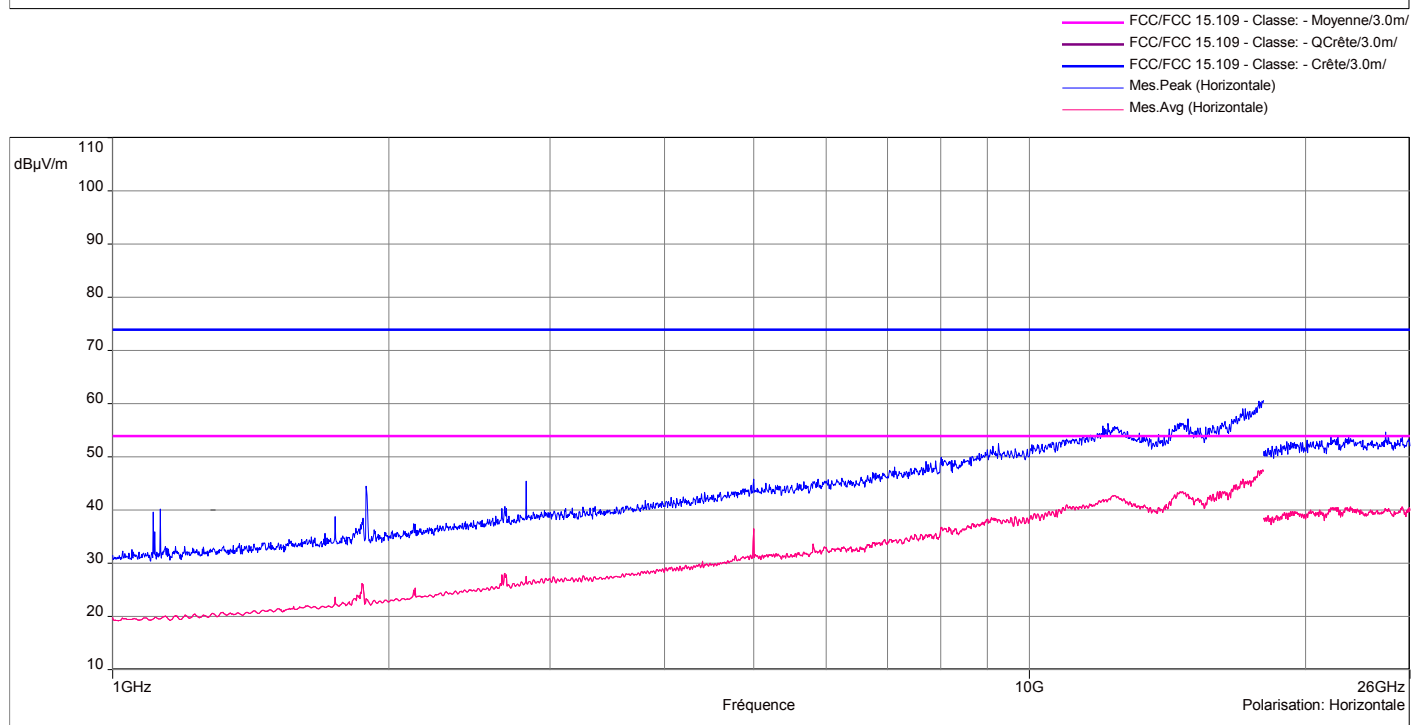
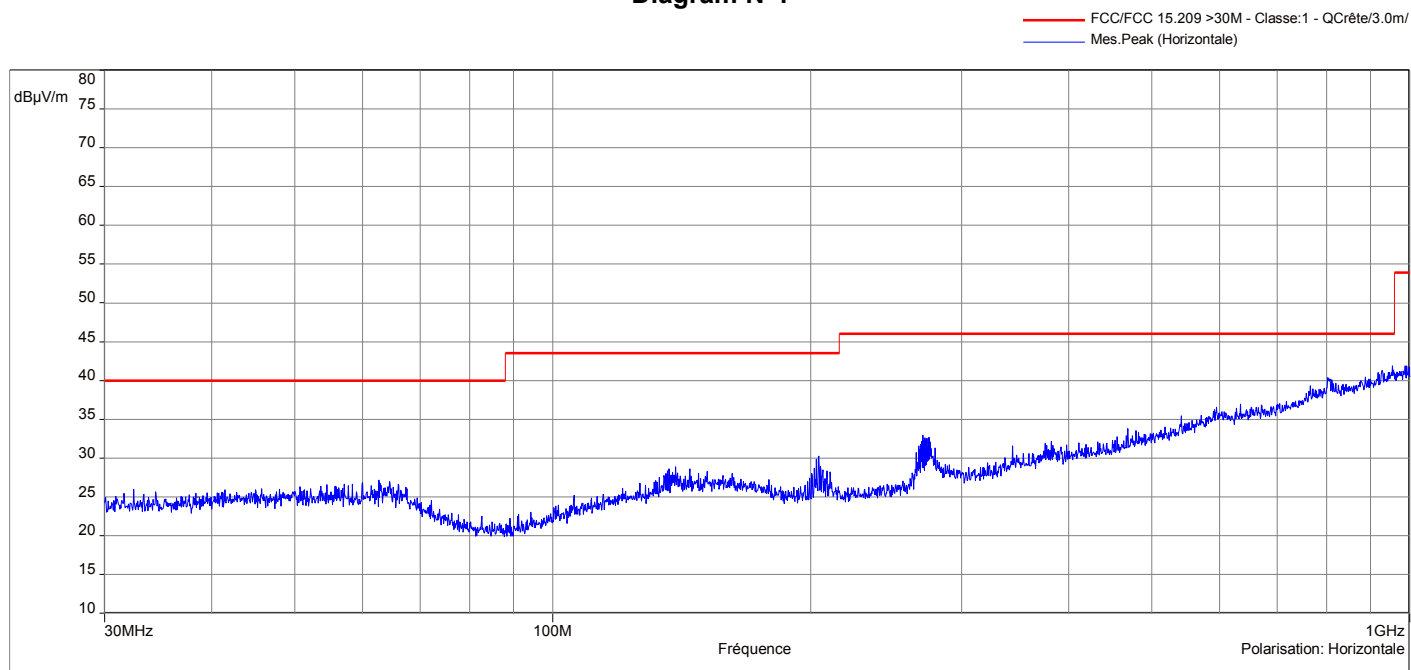


**No significant spurious has been observed between 26GHz to 40GHz
Horizontal Polarization (30MHz-40GHz)**



LCIE

Diagram N°2

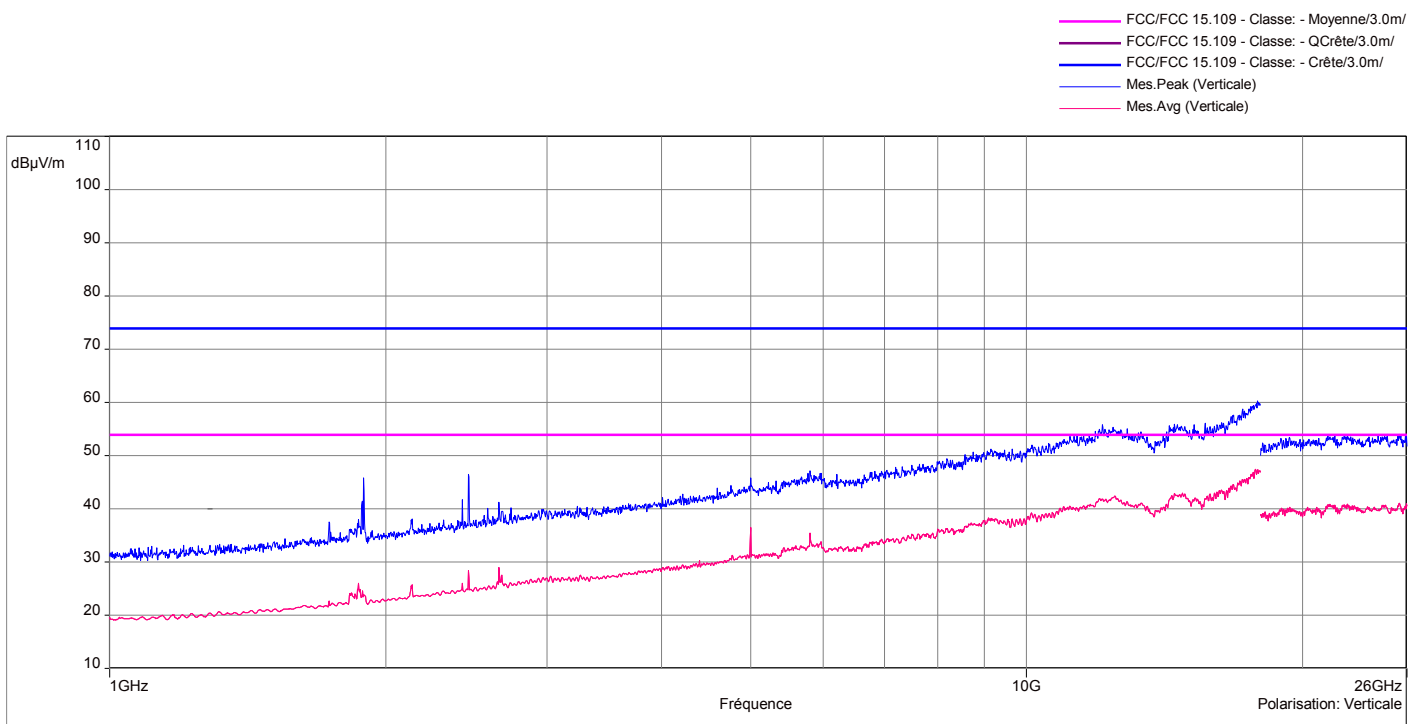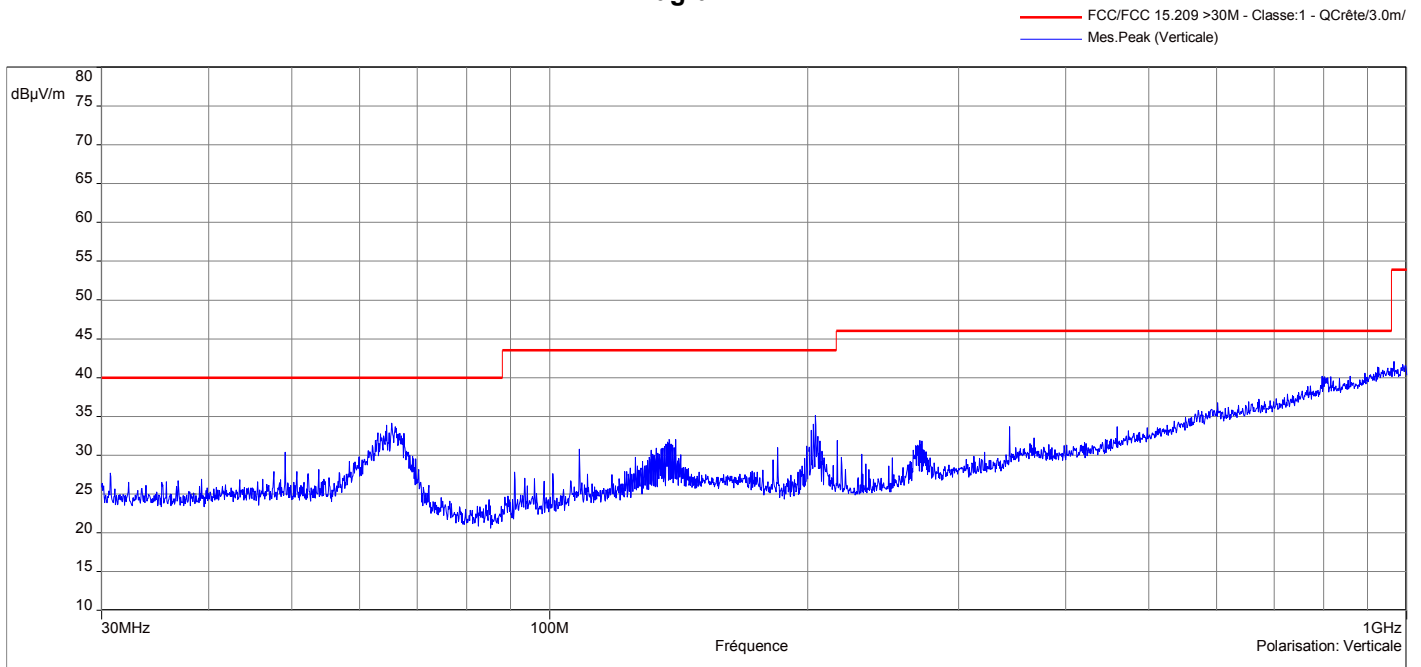

**No significant spurious has been observed between 26GHz to 40GHz
Vertical Polarization (30MHz-40GHz)**

3.6. CONCLUSION

Measures of Radiated Emission, performed on the sample of the product **Sound Box SBDV01**, SN: 253770742, in configuration and description presented in this test report, show levels conform to the FCC part 15 & ICES -003 limits.



4. Measurement of conducted disturbance

4.1. ENVIRONMENTAL CONDITIONS

Test performed by : **Steve Bogler**
Date of test : September 25, 2018
Ambient temperature : 20°C
Relative humidity : 38%

4.2. TEST SETUP

Specifications:

Frequency 0.15 – 30 MHz RBW 9 kHz
Detector Peak , Quasi Peak and average

The measurement is performed on power supply with a LISN and telecommunication lines with RSI or current clamp for shielded cables.

Operating conditions:

- Deviation method:



- ☐ Yes
☒ No


-Product installation:

- ☒ The EUT is installed on a wooden table 80 cm above the reference plane, at 80cm of the LISN and at 40cm of the vertical conductive wall
☐ The EUT is installed on a wooden table 40 cm above the reference plane, at 80cm of the LISN.
☐ The EUT is installed 10 cm above the reference plane, at 80cm of the LISN..

Operating mode:

- ☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ...

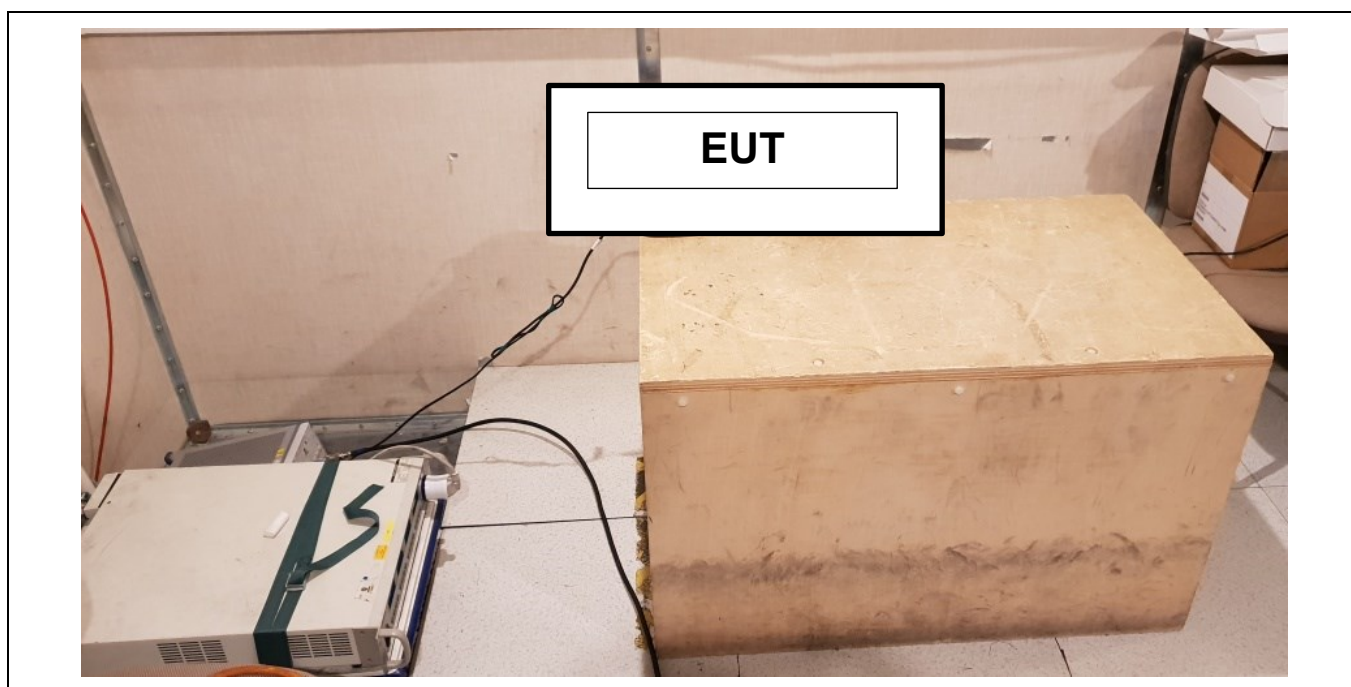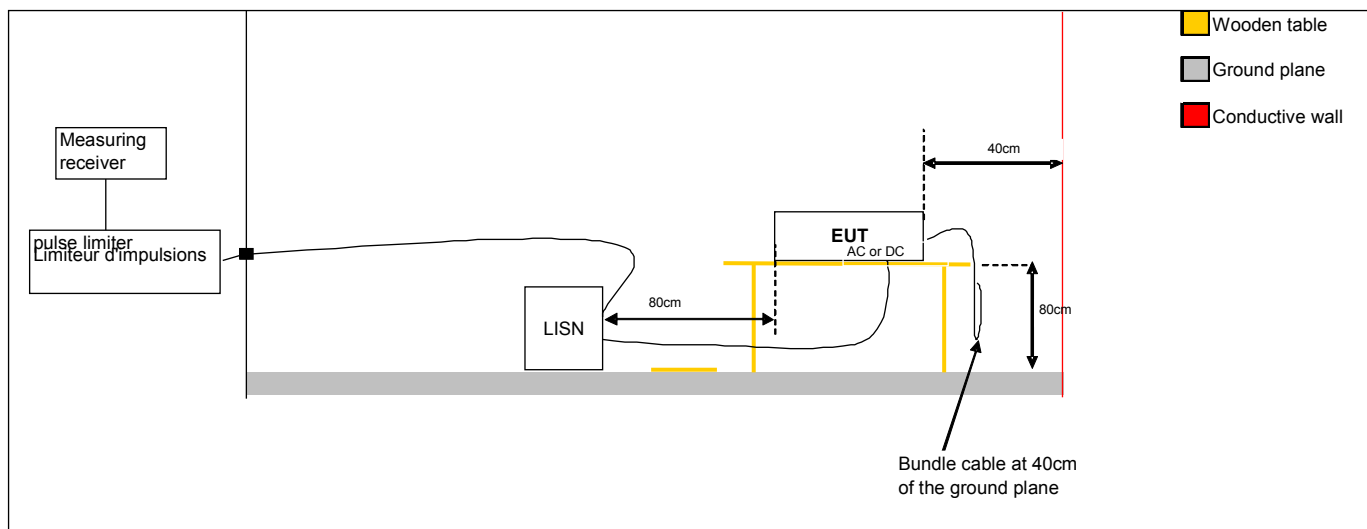

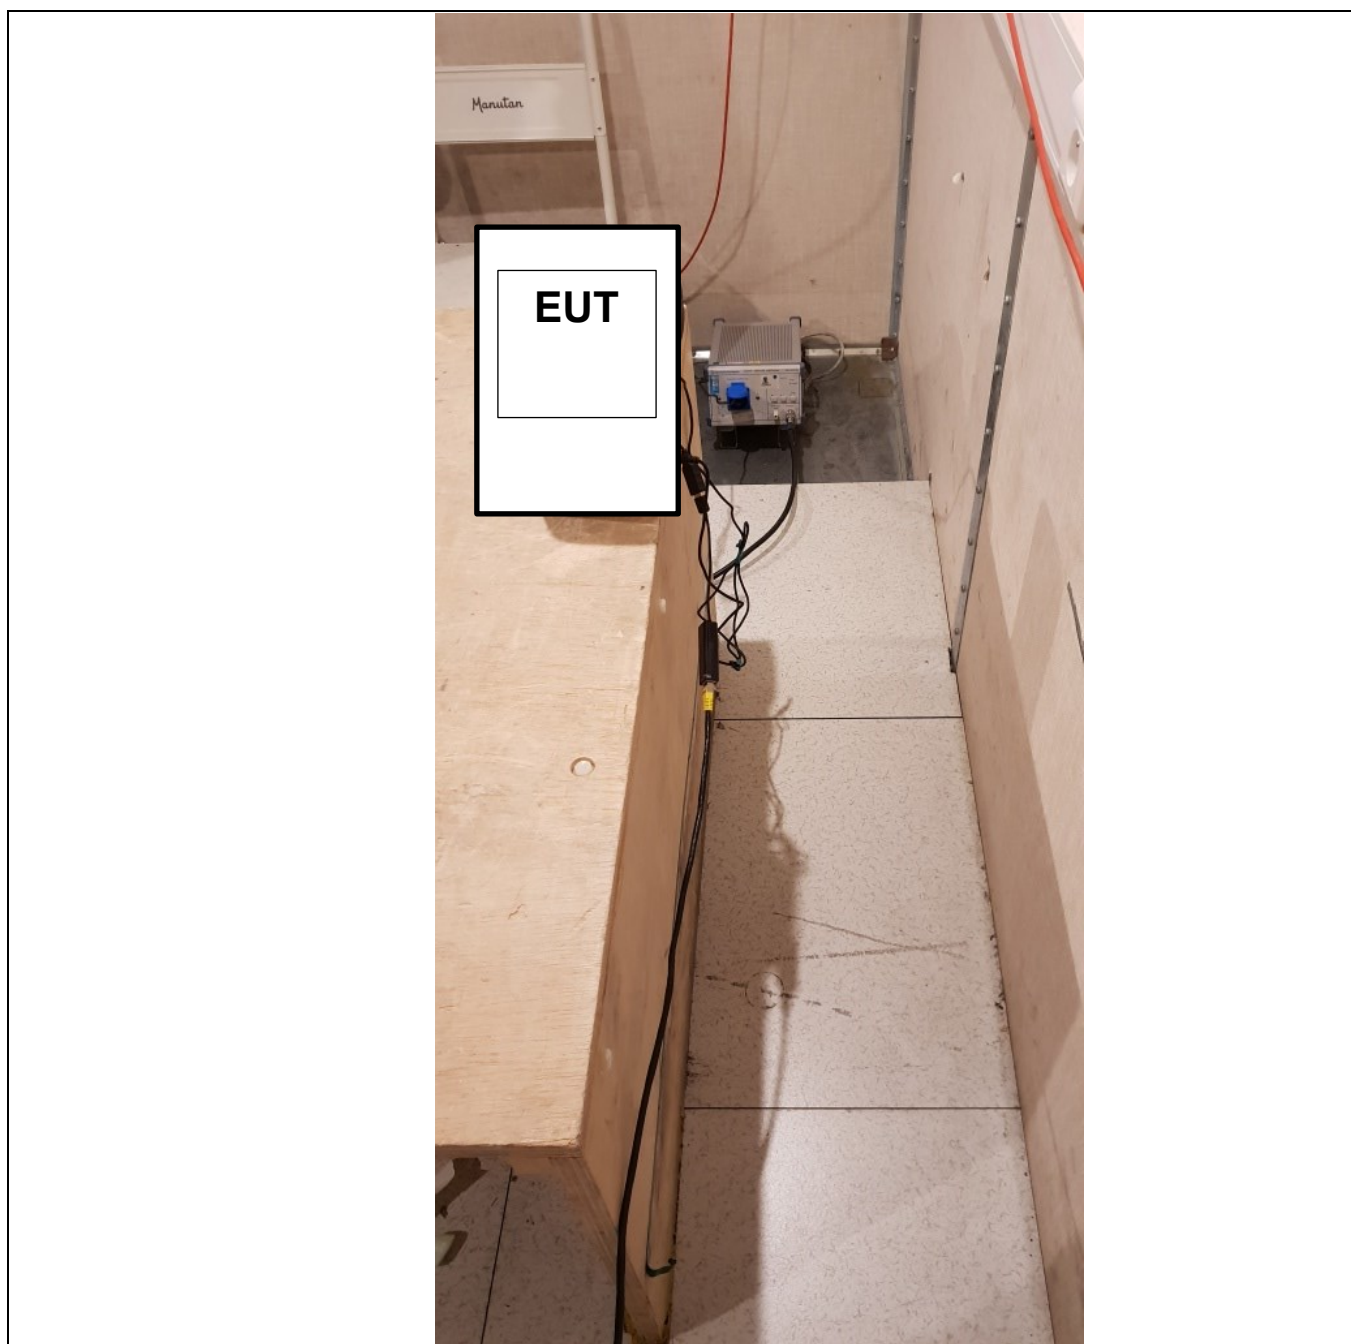

Test set up of conducted emission on power supply



4.3. LIMIT

☐ Power supply Class A

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) average
0.15-0.5MHz	79	66
0.5-30 MHz	73	60

☒ Power supply Class B

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) average
0.15-0.5MHz	66-56	56-46
0.5-5 MHz	56	46
5-30 MHz	60	50

4.4. TEST EQUIPMENT LIST

Description	Constructor	Model	N°	Cal. Date	Cal. Due
EMI Receiver	ROHDE & SCHWARZ	ESU26	A2642018	2016/10	2018/10
RSIL	ROHDE & SCHWARZ	ENV215	C2320162	2018/01	2019/01
AC power supply	ADAPTIVE POWER SYSTEM	FC210	A7360017	-	-
Cable	-	-	A5329712	2018/03	2019/03



4.5. RESULTS

Diagram N°1


FCC/FCC 15.107 - Classe:B - Moyenne/
FCC/FCC 15.107 - Classe:B - QCrête/
FCC/FCC 15.207 - Classe:B - Moyenne/
FCC/FCC 15.207 - Classe:B - QCrête/
Mes.Peak (Phase 1)
Mes.Avg (Phase 1)

Description Sous-bande 1

Fréquences: 150 kHz - 30 MHz (Mode: Lin, Pas: 5 kHz)

Réglages: RBW: 9kHz, VBW: Auto, Durée balayage: 50 ms/Pts, Atténuation: 10 dB, Nombre de Balayages: 1, Preamp: Off, LN Preamp: Off, Preselecteur: On

Ligne:Phase 1

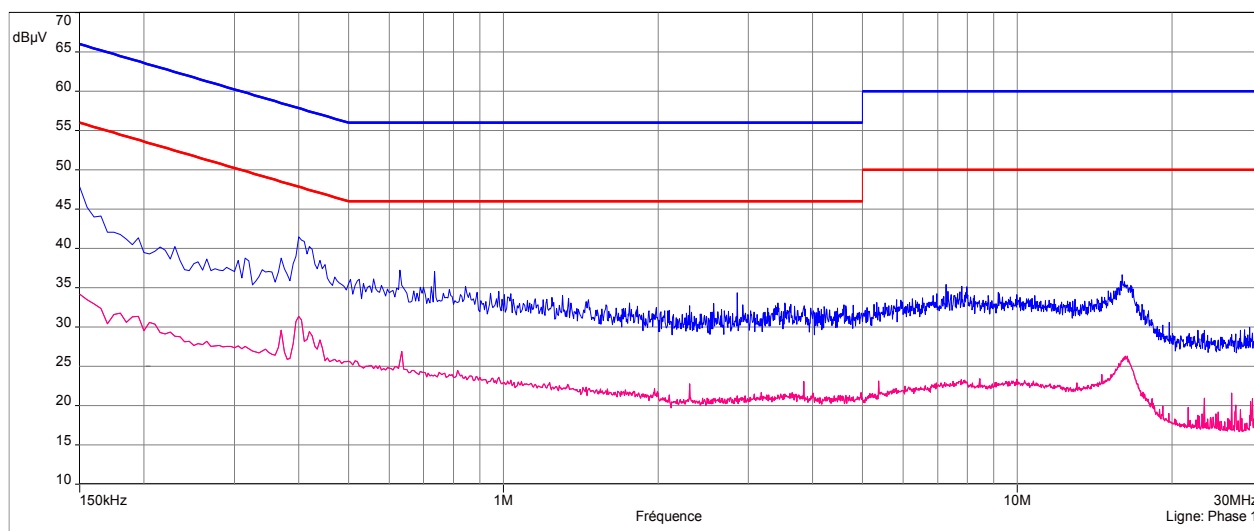

Phase
Diagram N°2


FCC/FCC 15.107 - Classe:B - Moyenne/
FCC/FCC 15.107 - Classe:B - QCrête/
FCC/FCC 15.207 - Classe:B - Moyenne/
FCC/FCC 15.207 - Classe:B - QCrête/
Mes.Peak (Neutre)
Mes.Avg (Neutre)

Description Sous-bande 2

Fréquences: 150 kHz - 30 MHz (Mode: Lin, Pas: 5 kHz)

Réglages: RBW: 9kHz, VBW: Auto, Durée balayage: 50 ms/Pts, Atténuation: 10 dB, Nombre de Balayages: 1, Preamp: Off, LN Preamp: Off, Preselecteur: On

Ligne:Neutre

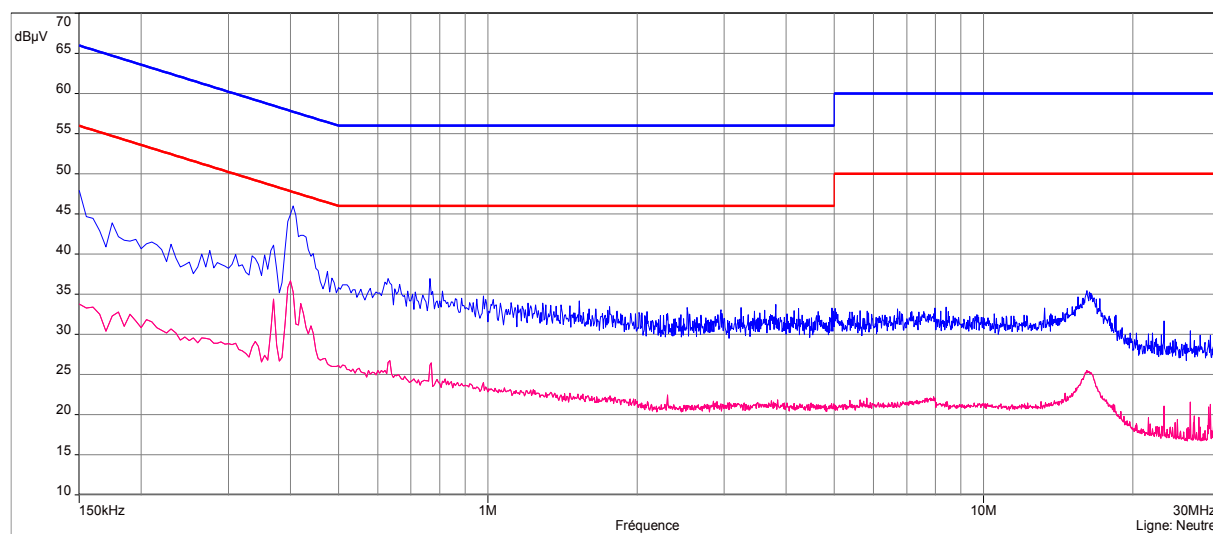

Neutral



4.6. CONCLUSION

Measures of Conducted Emission, performed on the sample of the product **Sound Box SBDV01**, SN: 253770742, in configuration and description presented in this test report, show levels conform to the FCC part 15 & ICES -003 limits.



5. Uncertainties Chart

Kind of measurement	Wide uncertainty laboratory (k=2) $\pm x$ (dB)	CISPR uncertainty limit $\pm y$ (dB)
Measurement of conducted disturbances in voltage on the AC power port (9 kHz – 150 kHz)	2,67	3.8
Measurement of conducted disturbances in voltage on the AC power port (150 kHz – 30 MHz)	2,67	3.4
Measurement of conducted disturbances in voltage on the telecommunication port. (AAN)	3,67	5.0
Measurement of conducted disturbances in current (current clamp)	2,73	2.9
Measurement of disturbance power	2,67	4.5
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC V01	4,48	/
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC C01	4,48	/
Measurement of radiated electric field from 30 to 1000MHz in horizontal position on the OATS (Ecuelles)	4,88	6.3
Measurement of radiated electric field from 1 to 18GHz on the Ecuelles site	5.16	/
Measurement of radiated electric field from 30 to 1000MHz in vertical position on the OATS (Ecuelles)	4,99	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC C01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC C01	5,16	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC V01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC V01	5,15	6.3
Measurement of radiated electric field from 1 to 6 GHz C01	5,1	5.2
Measurement of radiated electric field from 1 to 6 GHz V01	4,85	5.2
Measurement of radiated magnetic field from 10kHz to 30MHz on the OATS (Ecuelles)	4,48	/

End of test report