



LCIE

WIFI 5GHz Template: Release October 02th, 2018

TEST REPORT

N°: 157205-726501-D

Version : 02

Subject

Radio spectrum matters
tests according to standards:
47 CFR Part 15.407 (RF Test Only)

Issued to

SAGEMCOM BROADBAND SAS
250 Route de l'Empereur
92500 – RUEIL MALMAISON
FRANCE

Apparatus under test

- ↳ Product
- ↳ Trade mark
- ↳ Manufacturer
- ↳ Model under test
- ↳ Serial number
- ↳ FCC ID

Sound Box
Sagemcom®
SAGEMCOM
Sound Box SBDV01
253770742
VW3SBDV01

Test date

: September 14, 2018 to October 4, 2018

Test location

Fontenay Aux Roses

Test Site

6230B-1


Composition of document

202 pages

Document issued on

November 19, 2018

Written by :
Armand MAHOUNGOU
Tests operator

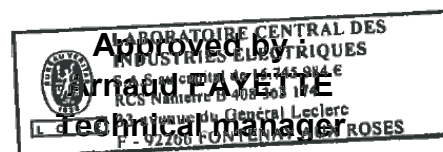

Fayette

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measurement. This document doesn't anticipate any certification decision.

LCIE

Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

33, Av du Général Leclerc
92266 Fontenay Aux Roses
FRANCE

Tél : +33 1 40 95 60 60
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	October 8, 2018	Armand MAHOUNGOU	Creation of the document
02	November 19, 2018	Armand MAHOUNGOU	Customer request withdraw all picture of the EUT from test report Add conducted measurement at 240V / 50 Hz P103-104/202



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH.....	17
4.	CARRIER FREQUENCIES	29
5.	26DB EMISSION BANDWIDTH	42
6.	6DB EMISSION BANDWIDTH	52
7.	DUTY CYCLE	58
8.	MAXIMUM CONDUCTED OUTPUT POWER, MAXIMUM POWER SPECTRAL DENSITY, MAXIMUM EIRP, MAXIMUM EIRP SPECTRAL DENSITY	61
9.	AC POWER LINE CONDUCTED EMISSIONS.....	98
10.	UNWANTED EMISSIONS & UNDESIRABLE EMISSION	105
11.	UNCERTAINTIES CHART	202

1. TEST PROGRAM

References

- 47 CFR Part 15.407
- KDB 789033 D02 General U-NII Tests Procedures New Rules v02r01
- KDB 662911 D01 Multiple Transmitter Output v02r01
- ANSI C63.10-2013

Radio requirement:

Clause (47CFR Part 15.407) Test Description	Test result - Comments			
Occupied Bandwidth P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
26dB Bandwidth P	☒ PASS	☐ FAIL	☐ NA(2)	☐ NP(1)
6dB Bandwidth P	☒ PASS	☐ FAIL	☐ NA(3)	☐ NP(1)
Duty Cycle P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
EIRP P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Maximum Conducted Output Power P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Power Spectral Density P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Transmit Power Control P	☒ PASS	☐ FAIL	☐ NA(4)	☐ NP(1)
AC Power Line Conducted Emission P	☒ PASS	☐ FAIL	☐ NA(5)	☐ NP(1)
Unwanted Emissions & Undesirable Emission P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Frequency Stability P	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)

This table is a summary of test report, see conclusion of each clause of this test report for detail.

(1): Limited program

(2): EUT only operates outside the 5725MHz-5850MHz band

(3): EUT only operates inside the 5725MHz-5850MHz band

(4): EIRP below 27dBm or EUT only operates inside 5150MHz-5250MHz or/and 5725MHz-5850MHz bands

(5): EUT not directly or indirectly connected to the AC Power Public Network



2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

Sagemcom® Sound Box SBDV01

Power supply : NBC80A200400M2

Serial Number: 253770742

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Cable	Power supply	-	☐	☐	☐	-
Ethernet cable	-	-	☐	☐	☐	-

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop computer	-	-	-

Equipment information:

Type:	WIFI			
Frequency band:	☒ 5150MHz-5250MHz	☒ 5250MHz-5350MHz	☒ 5470MHz-5725MHz	
	☒ 5725MHz-5850MHz			
Standard:	☒ 802.11a	☒ 802.11n HT20	☒ 802.11n HT40	
	☒ 802.11ac VHT20	☒ 802.11ac VHT40	☒ 802.11ac VHT80	
	☐ 802.11ac VHT160			
Spectrum Modulation:	☒ OFDM			
Channel bandwidth:	☒ 20MHz	☒ 40MHz	☒ 80MHz	☐ 160MHz
Antenna Type:	☒ Integral	☐ External	☐ Dedicated	
Antenna connector:	☒ Yes	☐ No	☐ Temporary for test	
Transmit chains:	☐ 1	☒ 2	☐ 3	☐ 4
	☐ 5	☐ 6	☐ 7	☐ 8
TPC:	☒ Yes		☐ No	
Receiver chains:	☐ 1	☒ 2	☐ 3	☐ 4
	☐ 5	☐ 6	☐ 7	☐ 8
Type of equipment:	☒ Stand-alone	☐ Plug-in	☐ Combined	
Operating temperature range:	Tmin:	☐ -20°C	☒ 0°C	☐ X °C
	Tnom:	20°C		
	Tmax:	☐ 35°C	☐ 55°C	☒ 40°C
Type of power source:	☒ AC power supply	☐ DC power supply	☐ Battery Battery Type	
Operating voltage range:	Vmin:	☒ 100 V/60Hz	☐ X Vdc	
	Vnom:	☒ 110V/60Hz	☐ X Vdc	
	Vmax:	☒ 120 V/60Hz	☐ X Vdc	
Mode:	☐ Master	☐ Slave with radar detection	☒ Slave without radar detection	
	☐ Bridge		☐ Mesh	
Fixed outdoor P to P/M application:	☐ Yes		☒ No	
System architectures:	☒ IP based		☐ Frame based	
Time require for EUT to complete its power cycle on	12 s			
User access restriction:	☒ Yes (The manufacturer declares that information regarding the parameters of the detected Radar Waveforms is not available to the end user)		☐ No	

Antenna Characteristic			
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
1	2.194	5150-5350	50
2	1.924	5150-5350	50
Accumulated	5.07	5150-5350	50
1	2.391	5470-5850	50
2	3.361	5470-5850	50
Accumulated	5.90	5470-5850	50

Accumulated gain calculation		
Formula used for calculation	KDB	Correlated
$10 \log[(10G1 / 20 + 10G2 / 20 + \dots + 10GN / 20)^2 / NANT] \text{dBi}$	KDB 662911 D01 v02r01	☒ Yes / ☐ No

CHANNEL PLAN		
802.11a / 802.11n HT20/ 802.11ac VHT20		
Channel	Frequency (MHz)	Available Channel
C1=36	5180	☒
C2=40	5200	☒
44	5220	☒
C3=48	5240	☒
C4=52	5260	☒
56	5280	☒
C5=60	5300	☒
C6=64	5320	☒
C7=100	5500	☒
104	5520	☒
108	5540	☒
112	5560	☒
C8=116	5580	☒
120	5600	☒
124	5620	☒
128	5640	☒
132	5660	☒
136	5680	☒
C9=140	5700	☒
C10=144	5720	☒
C11=149	5745	☒
153	5765	☒
C12=157	5785	☒
161	5805	☒
C13=165	5825	☒

CHANNEL PLAN		
802.11n HT40/ 802.11ac VHT40		
Channel	Frequency (MHz)	Available Channel
C14=36+40	5190	☒
C15=44+48	5230	☒
C16=52+56	5270	☒
C17=60+64	5310	☒
C18=100+104	5510	☒
C19=108+112	5550	☒
116+120	5590	☒
124+128	5630	☒
C20=132+136	5670	☒
C21=140+144	5710	☒
C22=149+153	5755	☒
C23=157+161	5795	☒

CHANNEL PLAN		
802.11ac VHT80		
Channel	Frequency (MHz)	Available Channel
C24=36+40+44+48	5210	☒
C25=52+56+60+64	5290	☒
C26=100+104+108+112	5530	☒
C27=116+120+124+128	5610	☒
C28=132+136+140+144	5690	☒
C29=149+153+157+161	5775	☒

No DFS Channel
DFS Channel
Weather DFS Channel

DATA RATE		
802.11a		
Data Rate (Mbps)	Modulation Type	Modulation Worst Case
6	BPSK	☒
9	BPSK	☐
12	QPSK	☐
18	QPSK	☐
24	16-QAM	☐
36	16-QAM	☐
48	64-QAM	☐
54	64-QAM	☐



L C I E

DATA RATE									
802.11n HT20									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				6.5	7.2	☑
	1	1	QPSK				13	14.4	☐
	2	1	QPSK				19.5	21.7	☐
	3	1	16-QAM				26	28.9	☐
	4	1	16-QAM				39	43.3	☐
	5	1	64-QAM				52	57.8	☐
	6	1	64-QAM				58.5	65	☐
☑	7	1	64-QAM				65	72.2	☐
	8	2	BPSK				13	14.4	☑
	9	2	QPSK				26	28.9	☐
	10	2	QPSK				39	43.3	☐
	11	2	16-QAM				52	57.8	☐
	12	2	16-QAM				78	86.7	☐
	13	2	64-QAM				104	115.6	☐
☐	14	2	64-QAM				117	130.3	☐
	15	2	64-QAM				130	144.4	☐
	16	3	BPSK				19.5	21.7	☐
	17	3	QPSK				39	43.3	☐
	18	3	QPSK				58.5	65	☐
	19	3	16-QAM				78	86.7	☐
	20	3	16-QAM				117	130	☐
☐	21	3	64-QAM				156	173.3	☐
	22	3	64-QAM				175.5	195	☐
	23	3	64-QAM				195	216.7	☐
	24	4	BPSK				26	28.9	☐
	25	4	QPSK				52	57.8	☐
	26	4	QPSK				78	86.7	☐
	27	4	16-QAM				104	115.6	☐
☐	28	4	16-QAM				156	173.3	☐
	29	4	64-QAM				208	231.1	☐
	30	4	64-QAM				234	260	☐
	31	4	64-QAM				260	288.9	☐
☐	32	1	BPSK	-	-	-	-	-	☐
	33	2	16-QAM	QPSK	-	-	39	43.3	☐
	34	2	64-QAM	QPSK	-	-	52	57.8	☐
	35	2	64-QAM	16-QAM	-	-	65	72.2	☐
	36	2	16-QAM	QPSK	-	-	58.5	65	☐
	37	2	64-QAM	QPSK	-	-	78	86.7	☐
	38	2	64-QAM	16-QAM	-	-	97.5	108.3	☐
☐	39	3	16-QAM	QPSK	QPSK	-	52	57.8	☐
	40	3	16-QAM	16-QAM	QPSK	-	65	72.2	☐
	41	3	64-QAM	QPSK	QPSK	-	65	72.2	☐
	42	3	64-QAM	16-QAM	QPSK	-	78	86.7	☐
	43	3	64-QAM	16-QAM	16-QAM	-	91	101.1	☐
	44	3	64-QAM	64-QAM	QPSK	-	91	101.1	☐
	45	3	64-QAM	64-QAM	16-QAM	-	104	115.6	☐
	46	3	16-QAM	QPSK	QPSK	-	78	86.7	☐
	47	3	16-QAM	16-QAM	QPSK	-	97.5	108.3	☐
	48	3	64-QAM	QPSK	QPSK	-	97.5	108.3	☐
	49	3	64-QAM	16-QAM	QPSK	-	117	130	☐
	50	3	64-QAM	16-QAM	16-QAM	-	136.5	151.7	☐
	51	3	64-QAM	64-QAM	QPSK	-	136.5	151.7	☐
	52	3	64-QAM	64-QAM	16-QAM	-	156	173.3	☐
☐	53	4	16-QAM	QPSK	QPSK	QPSK	65	72.2	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	78	86.7	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	91	101.1	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	78	86.7	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	91	101.1	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	104	115.6	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	117	130	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	104	115.6	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	117	130	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	130	144.4	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	130	144.4	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	143	158.9	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	97.5	108.3	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	117	130	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	136.5	151.7	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	117	130	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	136.5	151.7	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	156	173.3	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	175.5	195	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	156	173.3	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	175.5	195	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	195	216.7	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	195	216.7	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	214.5	238.3	☐



L C I E

DATA RATE									
802.11n HT40									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				13	15	☑
	1	1	QPSK				27	30	☐
	2	1	QPSK				40.5	45	☐
	3	1	16-QAM				54	60	☐
	4	1	16-QAM				81	90	☐
	5	1	64-QAM				108	120	☐
	6	1	64-QAM				121.5	135	☐
☑	7	1	64-QAM				135	150	☐
	8	2	BPSK				27	30	☑
	9	2	QPSK				54	60	☐
	10	2	QPSK				81	90	☐
	11	2	16-QAM				108	120	☐
	12	2	16-QAM				162	180	☐
	13	2	64-QAM				216	240	☐
☐	14	2	64-QAM				243	270	☐
	15	2	64-QAM				270	300	☐
	16	3	BPSK				40.5	45	☐
	17	3	QPSK				81	90	☐
	18	3	QPSK				121.5	135	☐
	19	3	16-QAM				162	180	☐
	20	3	16-QAM				243	270	☐
☐	21	3	64-QAM				324	360	☐
	22	3	64-QAM				364.5	405	☐
	23	3	64-QAM				405	450	☐
	24	4	BPSK				54	60	☐
	25	4	QPSK				108	120	☐
	26	4	QPSK				162	180	☐
	27	4	16-QAM				216	240	☐
☐	28	4	16-QAM				324	360	☐
	29	4	64-QAM				432	480	☐
	30	4	64-QAM				486	540	☐
	31	4	64-QAM				540	600	☐
	32	1	BPSK	-	-	-	6.0	6.7	☐
	33	2	16-QAM	QPSK	-	-	81	90.0	☐
	34	2	64-QAM	QPSK	-	-	108	120	☐
☐	35	2	64-QAM	16-QAM	-	-	135	150	☐
	36	2	16-QAM	QPSK	-	-	121.5	135	☐
	37	2	64-QAM	QPSK	-	-	162	180	☐
	38	2	64-QAM	16-QAM	-	-	202.5	225	☐
	39	3	16-QAM	QPSK	QPSK	-	108	120	☐
	40	3	16-QAM	16-QAM	QPSK	-	135	150	☐
	41	3	64-QAM	QPSK	QPSK	-	135	150	☐
☐	42	3	64-QAM	16-QAM	QPSK	-	162	180	☐
	43	3	64-QAM	16-QAM	16-QAM	-	189	210	☐
	44	3	64-QAM	64-QAM	QPSK	-	189	210	☐
	45	3	64-QAM	64-QAM	16-QAM	-	216	240	☐
	46	3	16-QAM	QPSK	QPSK	-	162	180	☐
	47	3	16-QAM	16-QAM	QPSK	-	202.5	225	☐
	48	3	64-QAM	QPSK	QPSK	-	202.5	225	☐
	49	3	64-QAM	16-QAM	QPSK	-	243	270	☐
	50	3	64-QAM	16-QAM	16-QAM	-	283.5	315	☐
	51	3	64-QAM	64-QAM	QPSK	-	283.5	315	☐
	52	3	64-QAM	64-QAM	16-QAM	-	324	360	☐
	53	4	16-QAM	QPSK	QPSK	QPSK	135	150	☐
☐	54	4	16-QAM	16-QAM	QPSK	QPSK	162	180	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	189	210	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	162	180	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	189	210	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	216	240	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	243	270	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	216	240	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	243	270	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	270	300	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	270	300	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	297	330	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	202.5	225	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	243	270	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	283.5	315	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	243	270	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	283.5	315	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	324	360	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	364.5	405	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	324	360	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	364.5	405	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	405	450	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	405	450	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	445.5	495	☐



DATA RATE: 802.11ac VHT20							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
☑	0	1	BPSK	1/2	6,5	7,2	☑
	1	1	QPSK	1/2	13	14,4	☐
	2	1	QPSK	3/4	19,5	21,7	☐
	3	1	16-QAM	1/2	26	28,9	☐
	4	1	16-QAM	3/4	39	43,3	☐
	5	1	64-QAM	2/3	52	57,8	☐
	6	1	64-QAM	3/4	58,5	65	☐
	7	1	64-QAM	5/6	65	72,2	☐
	8	1	256-QAM	3/4	78	86,7	☐
☑	9	1	256-QAM	5/6	N/A	N/A	☐
	10	2	BPSK	1/2	13	14,4	☑
	11	2	QPSK	1/2	26	28,8	☐
	12	2	QPSK	3/4	39	43,4	☐
	13	2	16-QAM	1/2	52	57,8	☐
	14	2	16-QAM	3/4	78	86,6	☐
	15	2	64-QAM	2/3	104	115,6	☐
	16	2	64-QAM	3/4	117	130	☐
	17	2	64-QAM	5/6	130	144,4	☐
☐	18	2	256-QAM	3/4	156	173,4	☐
	19	2	256-QAM	5/6	N/A	N/A	☐
	20	3	BPSK	1/2	19,5	21,6	☐
	21	3	QPSK	1/2	39	43,2	☐
	22	3	QPSK	3/4	58,5	65,1	☐
	23	3	16-QAM	1/2	78	86,7	☐
	24	3	16-QAM	3/4	117	129,9	☐
	25	3	64-QAM	2/3	156	173,4	☐
	26	3	64-QAM	3/4	175,5	195	☐
☐	27	3	64-QAM	5/6	195	216,6	☐
	28	3	256-QAM	3/4	234	260,1	☐
	29	3	256-QAM	5/6	N/A	N/A	☐
	30	4	BPSK	1/2	26	28,8	☐
	31	4	QPSK	1/2	52	57,6	☐
	32	4	QPSK	3/4	78	86,8	☐
	33	4	16-QAM	1/2	104	115,6	☐
	34	4	16-QAM	3/4	156	173,2	☐
	35	4	64-QAM	2/3	208	231,2	☐
☐	36	4	64-QAM	3/4	234	260	☐
	37	4	64-QAM	5/6	260	288,8	☐
	38	4	256-QAM	3/4	312	346,8	☐
	39	4	256-QAM	5/6	N/A	N/A	☐
	40	5	BPSK	1/2	32,5	36	☐
	41	5	QPSK	1/2	65	72	☐
	42	5	QPSK	3/4	97,5	108,5	☐
	43	5	16-QAM	1/2	130	144,5	☐
	44	5	16-QAM	3/4	195	216,5	☐
☐	45	5	64-QAM	2/3	260	289	☐
	46	5	64-QAM	3/4	292,5	325	☐
	47	5	64-QAM	5/6	325	361	☐
	48	5	256-QAM	3/4	390	433,5	☐
	49	5	256-QAM	5/6	N/A	N/A	☐
	50	6	BPSK	1/2	39	43,2	☐
	51	6	QPSK	1/2	78	86,4	☐
	52	6	QPSK	3/4	117	130,2	☐
	53	6	16-QAM	1/2	156	173,4	☐
☐	54	6	16-QAM	3/4	234	259,8	☐
	55	6	64-QAM	2/3	312	346,8	☐
	56	6	64-QAM	3/4	351	390	☐
	57	6	64-QAM	5/6	390	433,2	☐
	58	6	256-QAM	3/4	468	520,2	☐
	59	6	256-QAM	5/6	N/A	N/A	☐
	60	7	BPSK	1/2	45,5	50,4	☐
	61	7	QPSK	1/2	91	100,8	☐
	62	7	QPSK	3/4	136,5	151,9	☐
☐	63	7	16-QAM	1/2	182	202,3	☐
	64	7	16-QAM	3/4	273	303,1	☐
	65	7	64-QAM	2/3	364	404,6	☐
	66	7	64-QAM	3/4	409,5	455	☐
	67	7	64-QAM	5/6	455	505,4	☐
	68	7	256-QAM	3/4	546	606,9	☐
	69	7	256-QAM	5/6	N/A	N/A	☐
	70	8	BPSK	1/2	52	57,6	☐
	71	8	QPSK	1/2	104	115,2	☐
☐	72	8	QPSK	3/4	156	173,6	☐
	73	8	16-QAM	1/2	208	231,2	☐
	74	8	16-QAM	3/4	312	346,4	☐
	75	8	64-QAM	2/3	416	462,4	☐
	76	8	64-QAM	3/4	468	520	☐
	77	8	64-QAM	5/6	520	577,6	☐
	78	8	256-QAM	3/4	624	693,6	☐
	79	8	256-QAM	5/6	N/A	N/A	☐



DATA RATE: 802.11ac VHT40							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
☑	0	1	BPSK	1/2	13,5	15	☑
	1	1	QPSK	1/2	27	30	☐
	2	1	QPSK	3/4	40,5	45	☐
	3	1	16-QAM	1/2	54	60	☐
	4	1	16-QAM	3/4	81	90	☐
	5	1	64-QAM	2/3	108	120	☐
	6	1	64-QAM	3/4	121,5	135	☐
	7	1	64-QAM	5/6	135	150	☐
	8	1	256-QAM	3/4	162	180	☐
☑	9	1	256-QAM	5/6	180	200	☐
	10	2	BPSK	1/2	27	30	☑
	11	2	QPSK	1/2	54	60	☐
	12	2	QPSK	3/4	81	90	☐
	13	2	16-QAM	1/2	108	120	☐
	14	2	16-QAM	3/4	162	180	☐
	15	2	64-QAM	2/3	216	240	☐
	16	2	64-QAM	3/4	243	270	☐
	17	2	64-QAM	5/6	270	300	☐
☐	18	2	256-QAM	3/4	324	360	☐
	19	2	256-QAM	5/6	360	400	☐
	20	3	BPSK	1/2	40,5	45	☐
	21	3	QPSK	1/2	81	90	☐
	22	3	QPSK	3/4	121,5	135	☐
	23	3	16-QAM	1/2	162	180	☐
	24	3	16-QAM	3/4	243	270	☐
	25	3	64-QAM	2/3	324	360	☐
	26	3	64-QAM	3/4	364,5	405	☐
☐	27	3	64-QAM	5/6	405	450	☐
	28	3	256-QAM	3/4	486	540	☐
	29	3	256-QAM	5/6	540	600	☐
	30	4	BPSK	1/2	54	60	☐
	31	4	QPSK	1/2	108	120	☐
	32	4	QPSK	3/4	162	180	☐
	33	4	16-QAM	1/2	216	240	☐
	34	4	16-QAM	3/4	324	360	☐
	35	4	64-QAM	2/3	432	480	☐
☐	36	4	64-QAM	3/4	486	540	☐
	37	4	64-QAM	5/6	540	600	☐
	38	4	256-QAM	3/4	648	720	☐
	39	4	256-QAM	5/6	720	800	☐
	40	5	BPSK	1/2	67,5	75	☐
	41	5	QPSK	1/2	135	150	☐
	42	5	QPSK	3/4	202,5	225	☐
	43	5	16-QAM	1/2	270	300	☐
	44	5	16-QAM	3/4	405	450	☐
☐	45	5	64-QAM	2/3	540	600	☐
	46	5	64-QAM	3/4	607,5	675	☐
	47	5	64-QAM	5/6	675	750	☐
	48	5	256-QAM	3/4	810	900	☐
	49	5	256-QAM	5/6	900	1000	☐
	50	6	BPSK	1/2	81	90	☐
	51	6	QPSK	1/2	162	180	☐
	52	6	QPSK	3/4	243	270	☐
	53	6	16-QAM	1/2	324	360	☐
☐	54	6	16-QAM	3/4	486	540	☐
	55	6	64-QAM	2/3	648	720	☐
	56	6	64-QAM	3/4	729	810	☐
	57	6	64-QAM	5/6	810	900	☐
	58	6	256-QAM	3/4	972	1080	☐
	59	6	256-QAM	5/6	1080	1200	☐
	60	7	BPSK	1/2	94,5	105	☐
	61	7	QPSK	1/2	189	210	☐
	62	7	QPSK	3/4	283,5	315	☐
☐	63	7	16-QAM	1/2	378	420	☐
	64	7	16-QAM	3/4	567	630	☐
	65	7	64-QAM	2/3	756	840	☐
	66	7	64-QAM	3/4	850,5	945	☐
	67	7	64-QAM	5/6	945	1050	☐
	68	7	256-QAM	3/4	1134	1260	☐
	69	7	256-QAM	5/6	1260	1400	☐
	70	8	BPSK	1/2	108	120	☐
	71	8	QPSK	1/2	216	240	☐
☐	72	8	QPSK	3/4	324	360	☐
	73	8	16-QAM	1/2	432	480	☐
	74	8	16-QAM	3/4	648	720	☐
	75	8	64-QAM	2/3	864	960	☐
	76	8	64-QAM	3/4	972	1080	☐
	77	8	64-QAM	5/6	1080	1200	☐
	78	8	256-QAM	3/4	1296	1440	☐
	79	8	256-QAM	5/6	1440	1600	☐



L C I E

DATA RATE: 802.11ac VHT80							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
☑	0	1	BPSK	1/2	29.3	32.5	☑
	1	1	QPSK	1/2	58.5	65	☐
	2	1	QPSK	3/4	87.8	97.5	☐
	3	1	16-QAM	1/2	117	130	☐
	4	1	16-QAM	3/4	175.5	195	☐
	5	1	64-QAM	2/3	234	260	☐
	6	1	64-QAM	3/4	263.3	292.5	☐
	7	1	64-QAM	5/6	292.5	325	☐
	8	1	256-QAM	3/4	351	390	☐
☑	9	1	256-QAM	5/6	390	433.3	☐
	10	2	BPSK	1/2	58.6	65	☑
	11	2	QPSK	1/2	117	130	☐
	12	2	QPSK	3/4	175.6	195	☐
	13	2	16-QAM	1/2	234	260	☐
	14	2	16-QAM	3/4	351	390	☐
	15	2	64-QAM	2/3	468	520	☐
	16	2	64-QAM	3/4	526.6	585	☐
	17	2	64-QAM	5/6	585	650	☐
☐	18	2	256-QAM	3/4	702	780	☐
	19	2	256-QAM	5/6	780	866.6	☐
	20	3	BPSK	1/2	87.9	97.5	☐
	21	3	QPSK	1/2	175.5	195	☐
	22	3	QPSK	3/4	263.4	292.5	☐
	23	3	16-QAM	1/2	351	390	☐
	24	3	16-QAM	3/4	526.5	585	☐
	25	3	64-QAM	2/3	702	780	☐
	26	3	64-QAM	3/4	789.9	877.5	☐
☐	27	3	64-QAM	5/6	877.5	975	☐
	28	3	256-QAM	3/4	1053	1170	☐
	29	3	256-QAM	5/6	1170	1299.9	☐
	30	4	BPSK	1/2	117.2	130	☐
	31	4	QPSK	1/2	234	260	☐
	32	4	QPSK	3/4	351.2	390	☐
	33	4	16-QAM	1/2	468	520	☐
	34	4	16-QAM	3/4	702	780	☐
	35	4	64-QAM	2/3	936	1040	☐
☐	36	4	64-QAM	3/4	1053.2	1170	☐
	37	4	64-QAM	5/6	1170	1300	☐
	38	4	256-QAM	3/4	1404	1560	☐
	39	4	256-QAM	5/6	1560	1733.2	☐
	40	5	BPSK	1/2	146.5	162.5	☐
	41	5	QPSK	1/2	292.5	325	☐
	42	5	QPSK	3/4	439	487.5	☐
	43	5	16-QAM	1/2	585	650	☐
	44	5	16-QAM	3/4	877.5	975	☐
☐	45	5	64-QAM	2/3	1170	1300	☐
	46	5	64-QAM	3/4	1316.5	1462.5	☐
	47	5	64-QAM	5/6	1462.5	1625	☐
	48	5	256-QAM	3/4	1755	1950	☐
	49	5	256-QAM	5/6	1950	2166.5	☐
	50	6	BPSK	1/2	175.8	195	☐
	51	6	QPSK	1/2	351	390	☐
	52	6	QPSK	3/4	526.8	585	☐
	53	6	16-QAM	1/2	702	780	☐
☐	54	6	16-QAM	3/4	1053	1170	☐
	55	6	64-QAM	2/3	1404	1560	☐
	56	6	64-QAM	3/4	1579.8	1755	☐
	57	6	64-QAM	5/6	1755	1950	☐
	58	6	256-QAM	3/4	2106	2340	☐
	59	6	256-QAM	5/6	2340	2599.8	☐
	60	7	BPSK	1/2	205.1	227.5	☐
	61	7	QPSK	1/2	409.5	455	☐
	62	7	QPSK	3/4	614.6	682.5	☐
☐	63	7	16-QAM	1/2	819	910	☐
	64	7	16-QAM	3/4	1228.5	1365	☐
	65	7	64-QAM	2/3	1638	1820	☐
	66	7	64-QAM	3/4	1843.1	2047.5	☐
	67	7	64-QAM	5/6	2047.5	2275	☐
	68	7	256-QAM	3/4	2457	2730	☐
	69	7	256-QAM	5/6	2730	3033.1	☐
	70	8	BPSK	1/2	234.4	260	☐
	71	8	QPSK	1/2	468	520	☐
☐	72	8	QPSK	3/4	702.4	780	☐
	73	8	16-QAM	1/2	936	1040	☐
	74	8	16-QAM	3/4	1404	1560	☐
	75	8	64-QAM	2/3	1872	2080	☐
	76	8	64-QAM	3/4	2106.4	2340	☐
	77	8	64-QAM	5/6	2340	2600	☐
	78	8	256-QAM	3/4	2808	3120	☐
	79	8	256-QAM	5/6	3120	3466.4	☐

2.2. RUNNING MODE


The EUT is set in the following modes during tests:

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent emission with modulation on a fixed channel in the data rate that produced the lowest power
- Permanent reception

Following commands with the specific test software “Tera-Term” are used to set the product:

- See document: 998049_02 - WIFI compliance test command of PONY FCC 5GHz, for the commands used during test.
- See document: SAGEMCOM_soundbox_wifi_2G_5G, for the commands used during test.

2.3. EQUIPMENT LABELLING

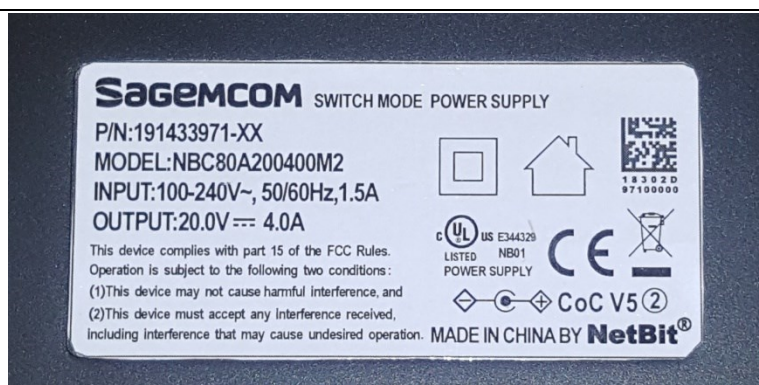

Factory S/N Code barre type 128	Code barre type 128	 LISTED I.T.E. E308616	SAGEMCOM Sound Box SBDV01 253770742-ind 20V --- 4A Date Code: WW/YY SSID : amplify-CCDDEE Made in CZECH Republic
	MSO Part Number: 12345		
	Code barre type 128		
	SGC S/N: 123456789012		
MAC Address : aa:bb:cc:dd:ee	FCC ID: VW3SBDV01	Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio and the double-D symbol are trademarks of Dolby Laboratories.	
TYM S/N : XXXXXXXXXX			

2.4. EQUIPMENT MODIFICATION

☒ None ☐ Modification:

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU
Date of test : September 21, 2018 to September 25, 2018
Ambient temperature : 27°C & 28°C
Relative humidity : 48% & 46%

3.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ KDB 789033 D02 General UNII Test Procedures New Rules v02r01 § D

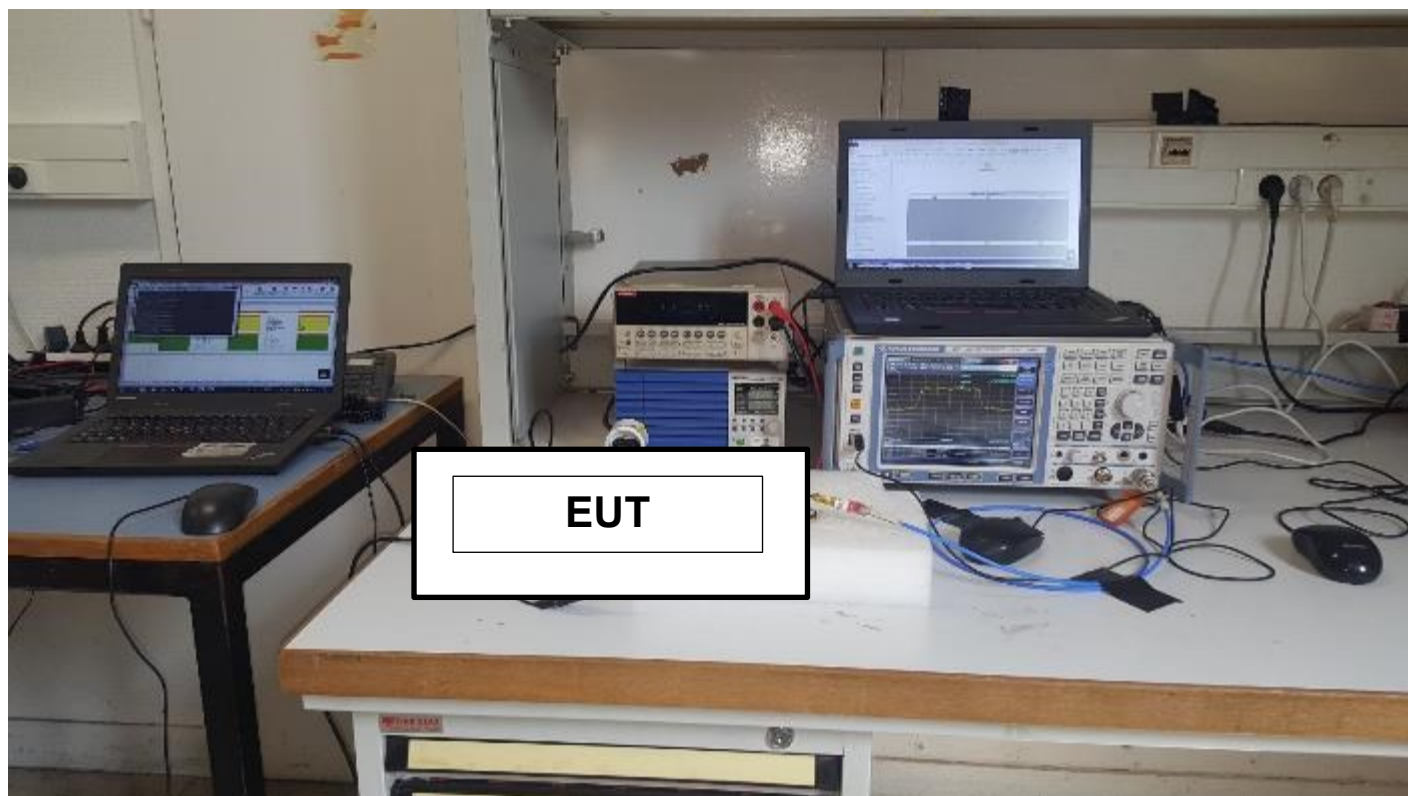

Photograph for Occupied bandwidth



3.1. LIMIT

None

3.2. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2016/11	2018/11
Multimeter	KEITHLEY	2000	A1242090	2017/05	2019/05
Power supply	KIKUSUI	PCR500M	A7040079	Cal with Multimeter	Cal with Multimeter
Cable	TELEDYNE	920-0202-048	A5329674	2017/10	2018/10

Note: In our quality system, the test equipment calibration due is more & less 2 months

3.3. RESULTS




802.11a
Antenna 1
C10

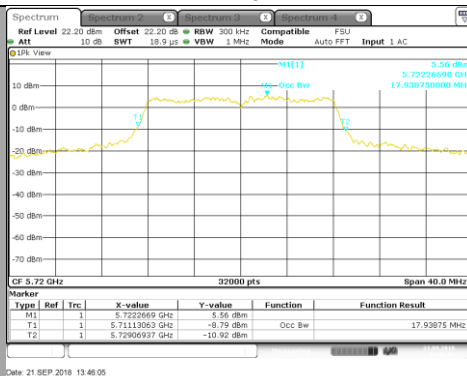


Date: 21 SEP 2018 13:46:05

C11

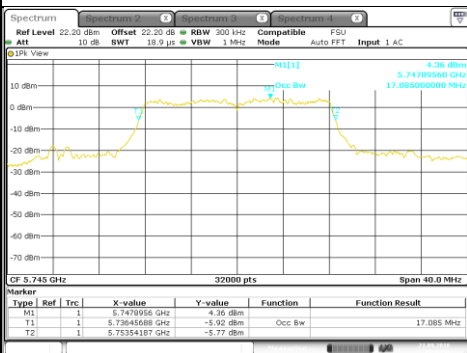


Date: 21 SEP 2018 13:46:53

C12

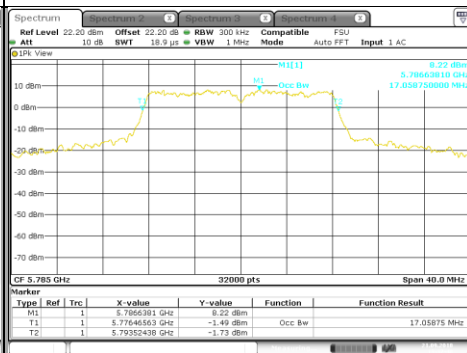

Date: 21 SEP 2018 13:47:48

C13

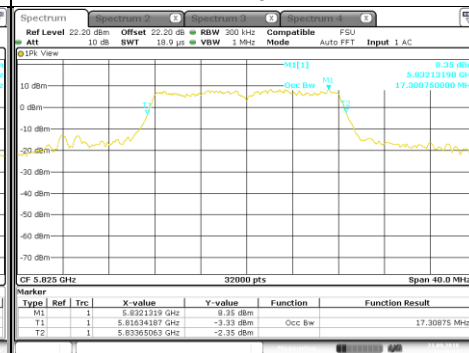

Date: 21 SEP 2018 13:48:37

Channel

Occupied Channel Bandwidth (MHz)

C1	16.78
C2	16.93
C3	16.90
C4	17.12
C5	16.96
C6	16.84
C7	16.78
C8	18.21
C9	16.75
C10	17.94
C11	17.08
C12	17.06
C13	17.31



LCIE


802.11a
Antenna 2






L C I E


802.11a
Antenna 2
C10

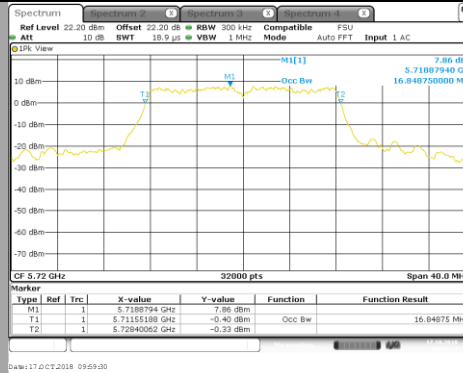


C11

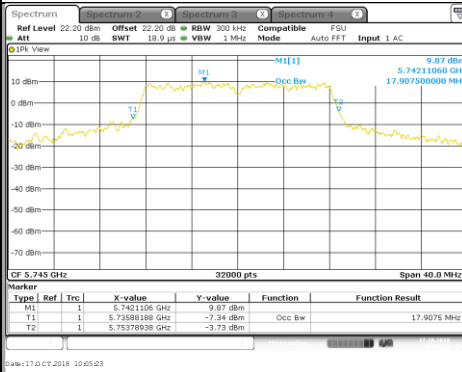

C12

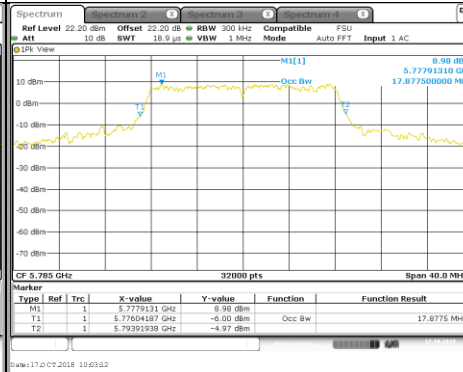

C13

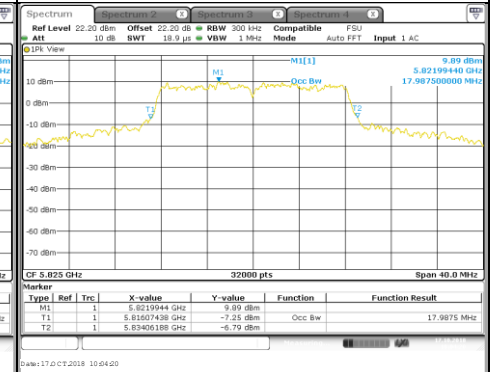

Channel

Occupied Channel Bandwidth (MHz)

C1

16.82

C2

16.96

C3

16.86

C4

16.82

C5

16.83

C6

16.88

C7

16.78

C8

16.98

C9

16.71

C10

16.85

C11

17.91


C12

17.88

C13


17.99

802.11n HT20/ac VHT20

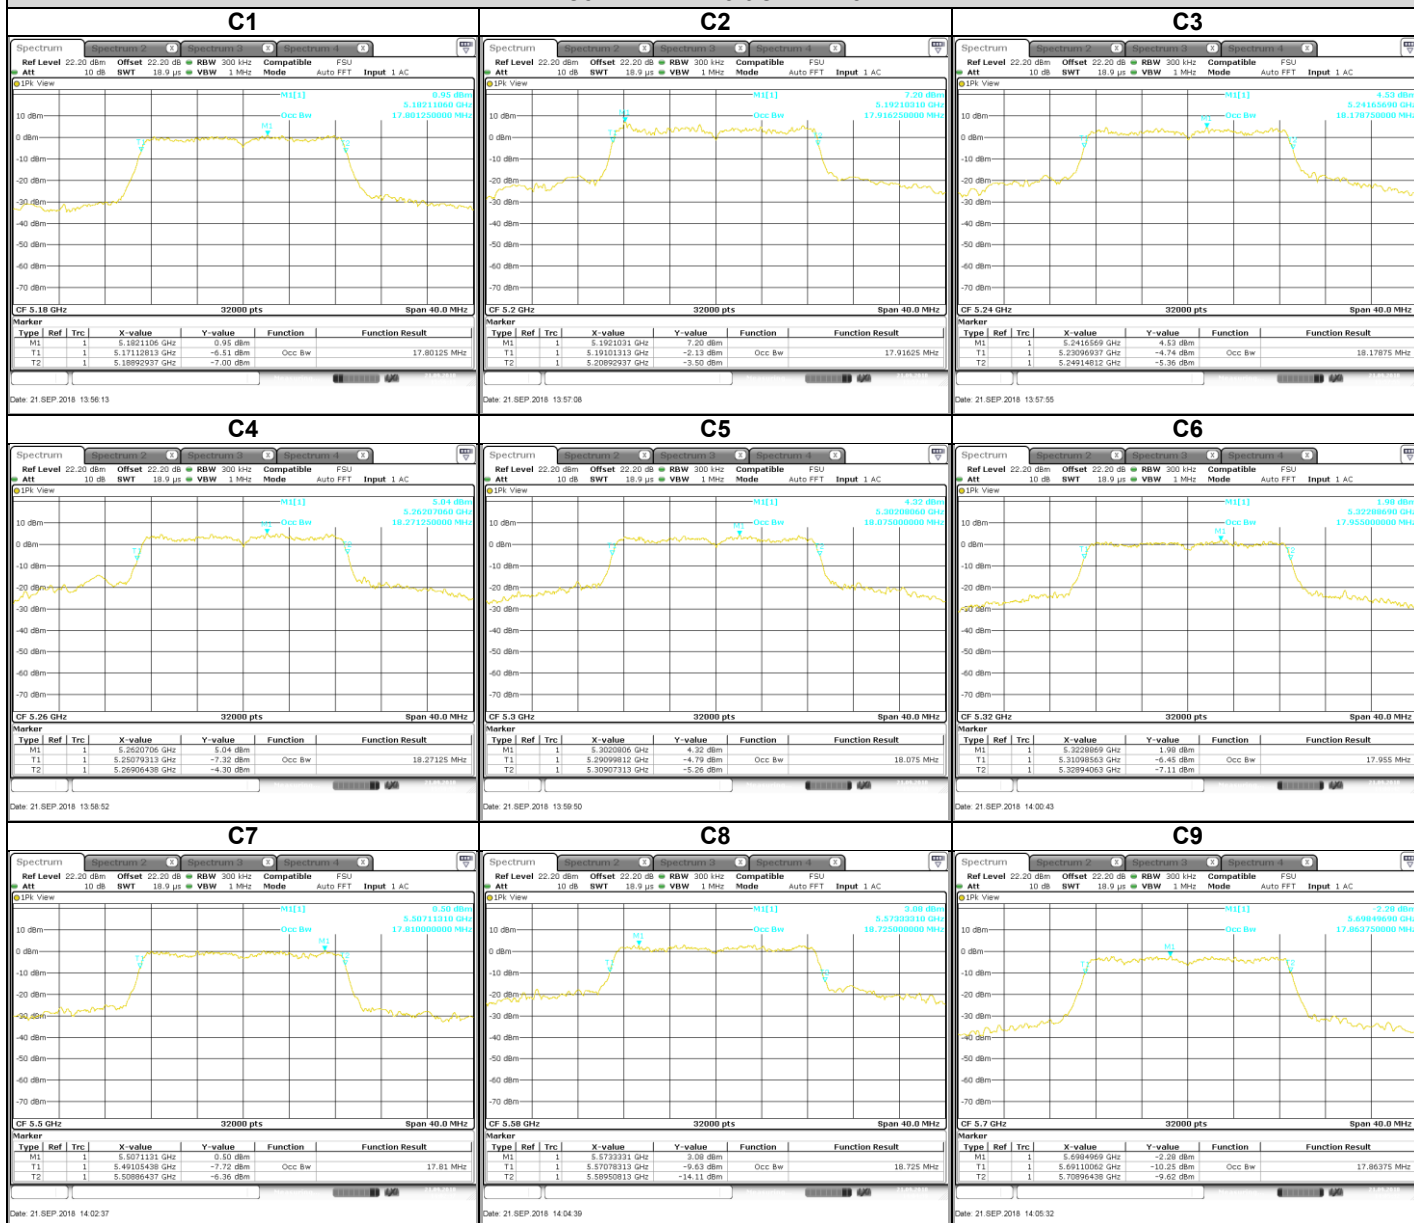


802.11n HT20/ac VHT20


C10

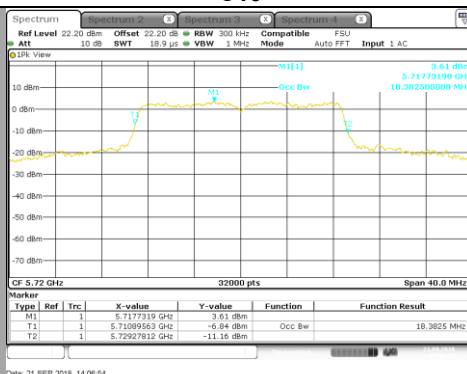


C11

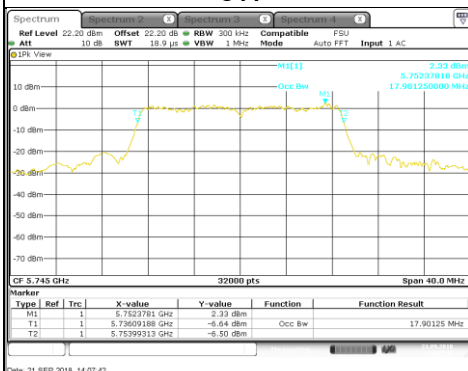

C12

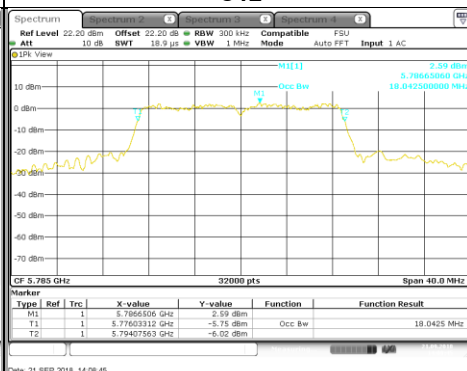

C13

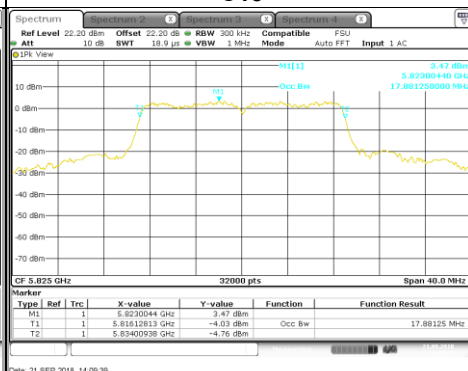


Channel

Occupied Channel Bandwidth (MHz)


C1	17.80
C2	17.91
C3	18.18
C4	18.27
C5	18.07
C6	17.95
C7	17.81
C8	18.72
C9	17.86
C10	18.38
C11	17.90
C12	18.04
C13	17.88

802.11n HT40/ac VHT40


C14

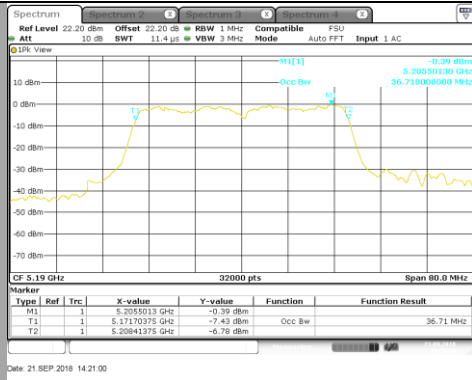


C15

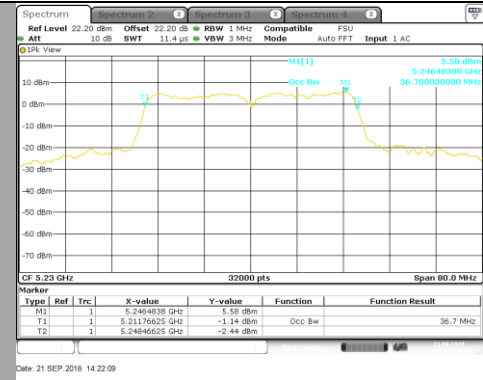


C16

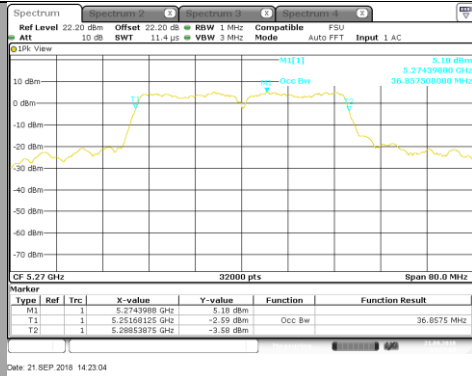


C17

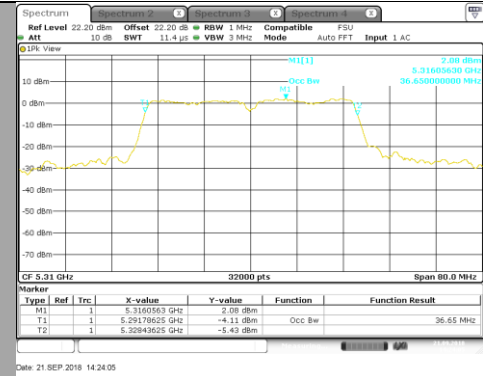


C18

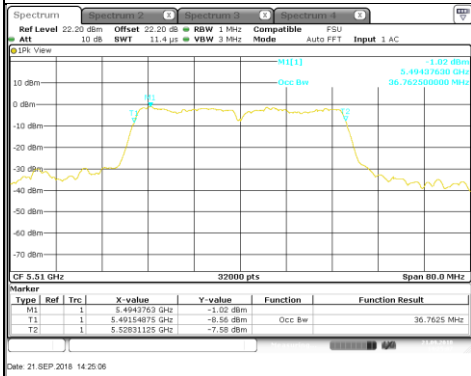

C19

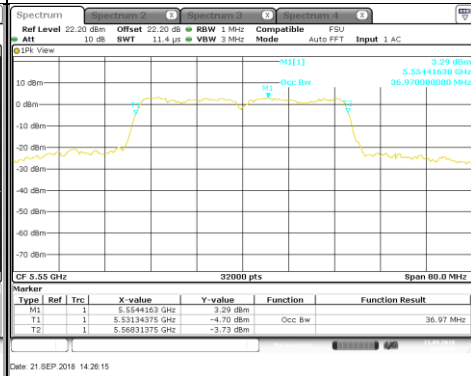


C20

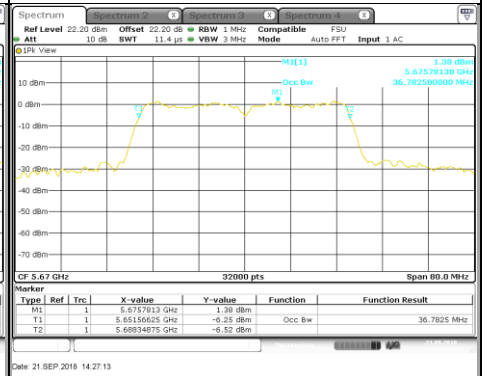


802.11n HT40/ac VHT40


C21

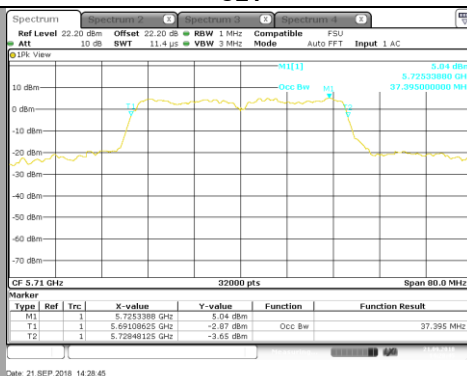

C22

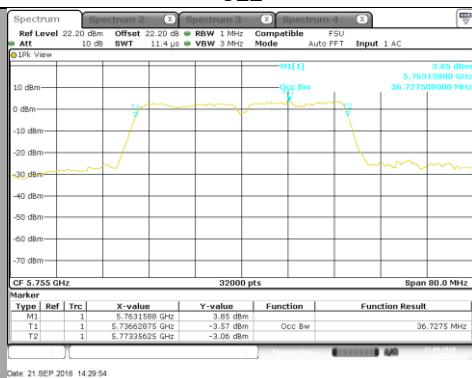


C23

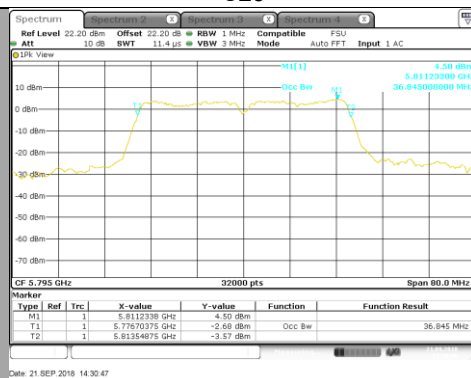


Channel	Occupied Channel Bandwidth (MHz)
C14	36.71
C15	36.70
C16	36.86
C17	36.65
C18	36.76
C19	36.97
C20	36.78
C21	37.39
C22	36.73
C23	36.84

802.11ac VHT80


C24

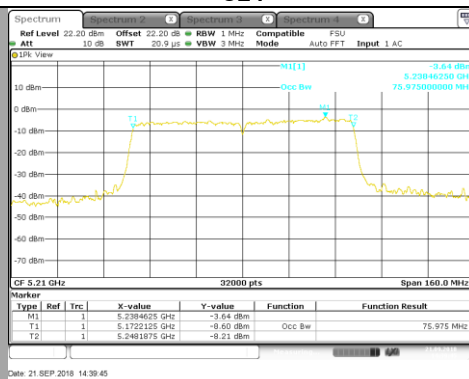


C25

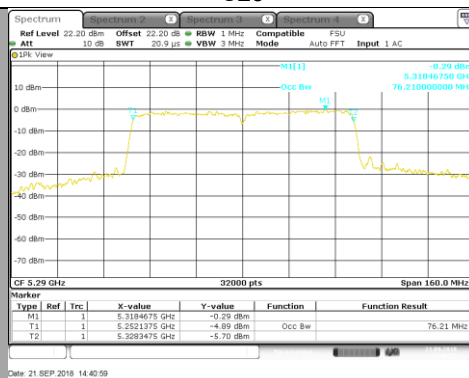

C26

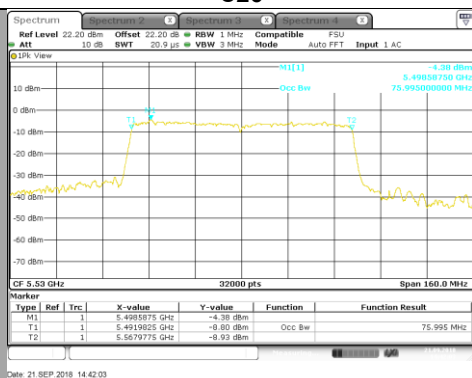


C27

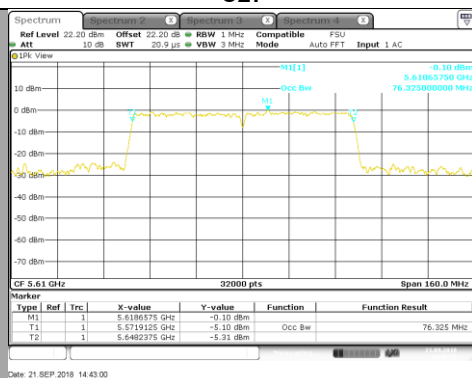


802.11ac VHT80

C28

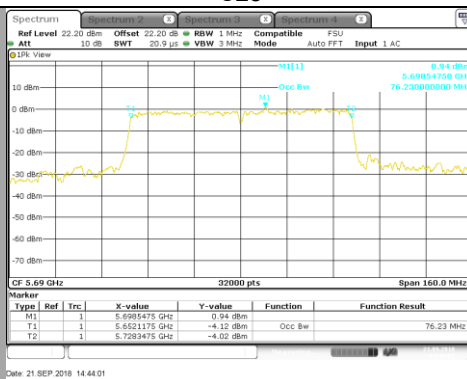

C29

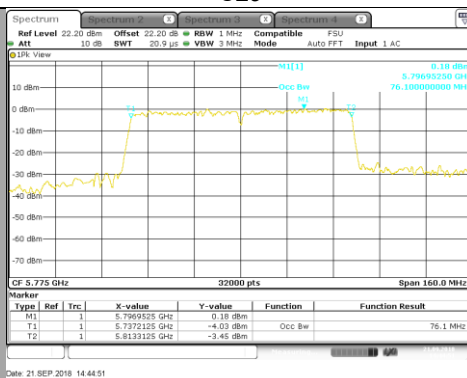

Channel	Occupied Channel Bandwidth (MHz)
C24	75.97
C25	76.21
C26	75.99
C27	76.32
C28	76.23
C29	76.10

3.1. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **Sagemcom® Sound Box SBDV01**, SN: **253770742**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.407** limits.

4. CARRIER FREQUENCIES

4.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU
Date of test : September 25, 2018
Ambient temperature : 26 °C
Relative humidity : 43 %

4.2. TEST SETUP

- The Equipment under Test is installed:

- ☒ In the climatic chamber
- ☐ On a table
- ☐ In an anechoic chamber

-Measurement is performed with a spectrum analyzer

- ☒ On the EUT conducted access
- ☐ With a test fixture

-Method of measurement

- ☐ Unmodulated (Spectrum Analyzer Counter Function)
- ☒ Modulated (Spectrum Analyzer NdB down Function)


In case of smart antenna systems operating in a multiple transmit chains active simultaneously, the measurement is only performed on one of the active transmit chains.



Photograph for Carrier Frequencies



Photograph for Carrier Frequencies in normal test condition

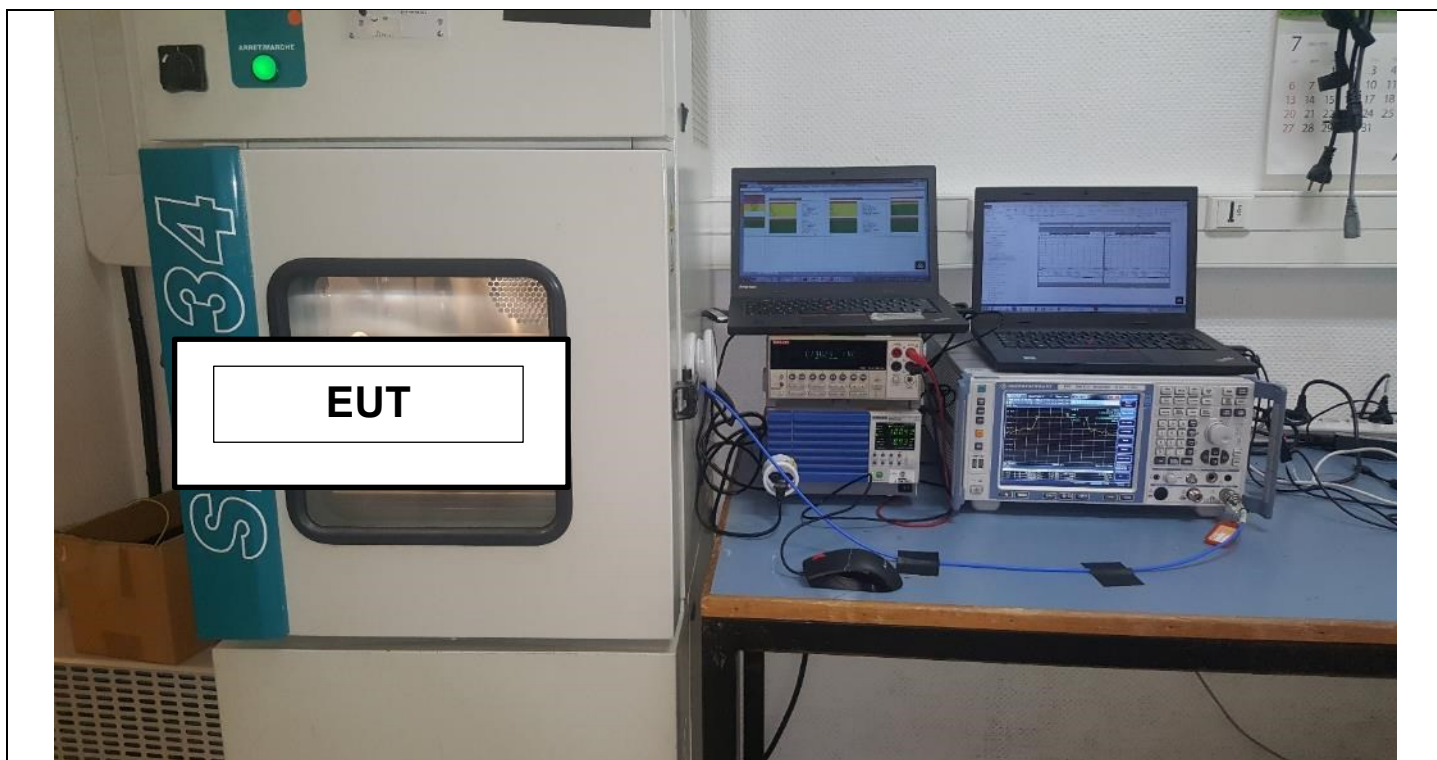

Photograph for Carrier Frequencies in extreme test condition



4.3. LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Climatic chamber	SECASI	SLT34	D1024029	Cal with Hygrometer	Cal with Hygrometer
Hygrometer	AOIP	TM360	B4041042	2018/06	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2016/11	2018/11
Multimeter	KEITHLEY	2000	A1242090	2017/05	2019/05
Power supply	KIKUSUI	PCR500M	A7040079	Cal with Multimeter	Cal with Multimeter
Cable	TELEDYNE	920-0202-048	A5329674	2017/10	2018/10

Note: In our quality system, the test equipment calibration due is more & less 2 months

4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☒ None ☐ Divergence:

4.6. RESULTS





802.11a/802.11nHT20/ac VHT20

Tmin

Vnom



C2

C5

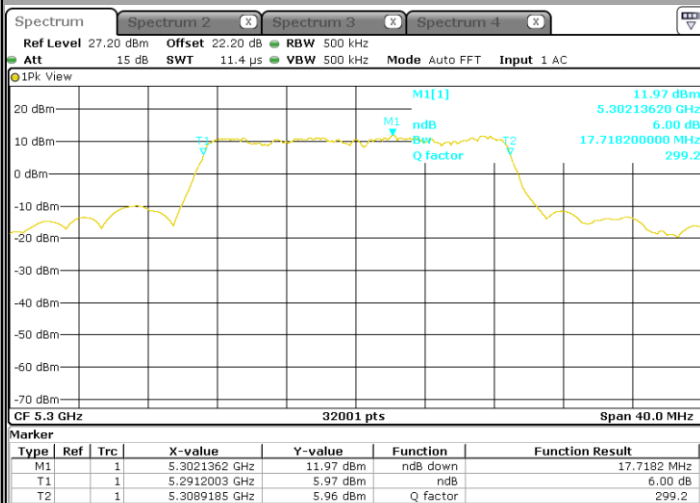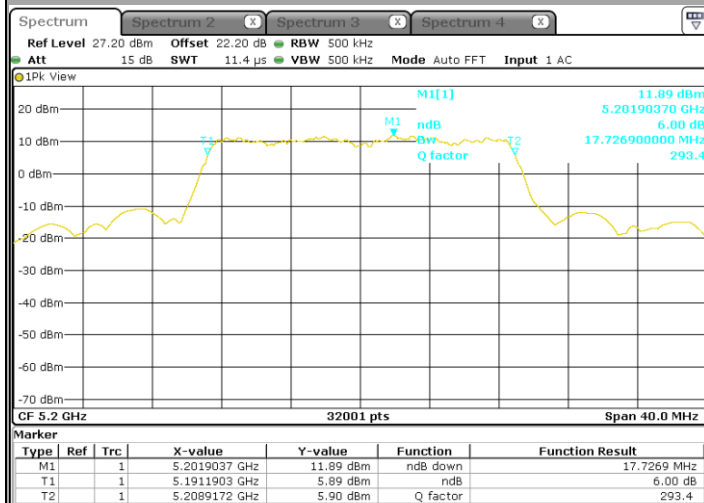

C8

C12

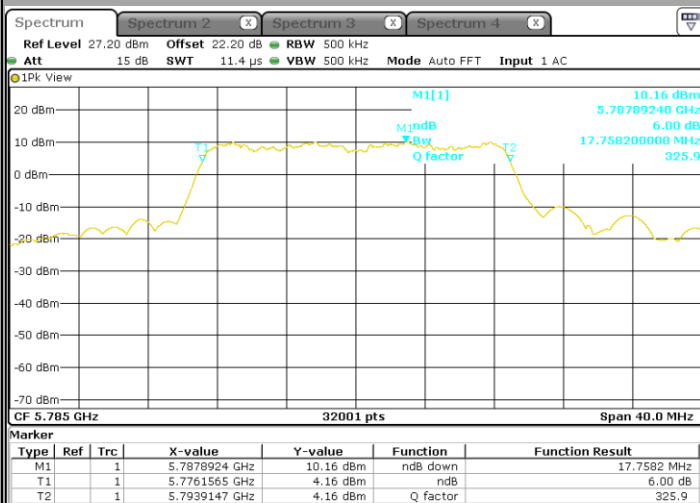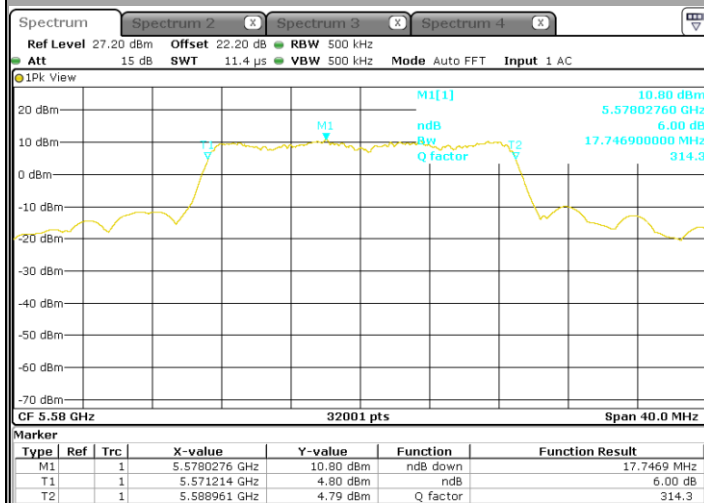



802.11a/802.11nHT20/ac VHT20

Tmin

Vmax



C2

C5

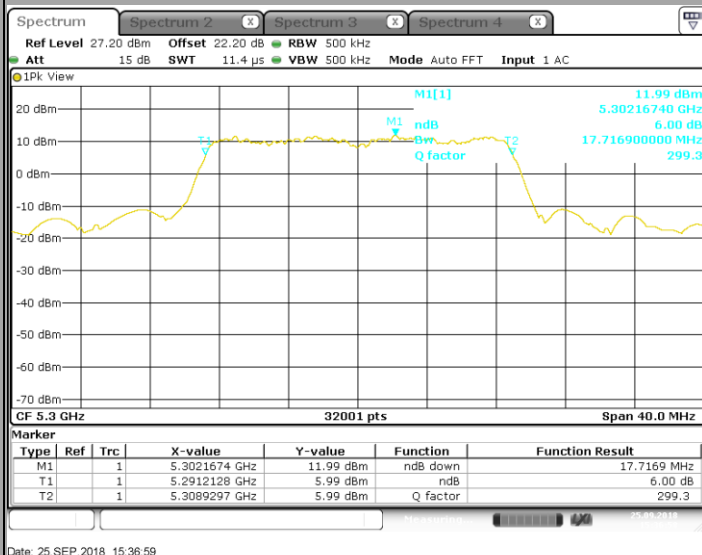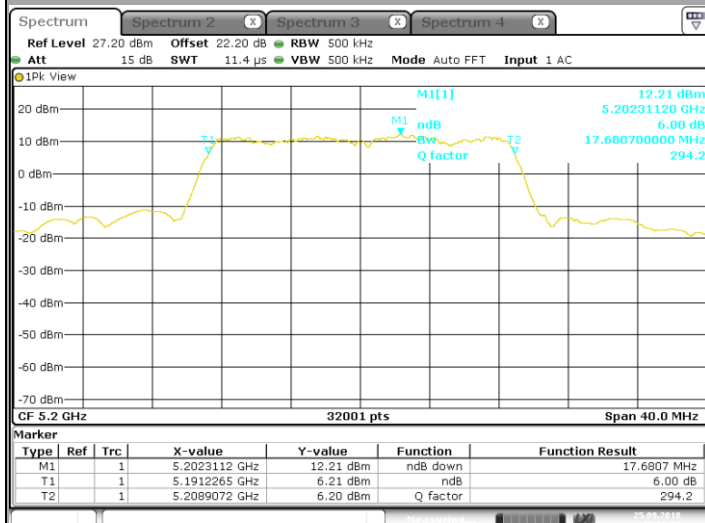

C8

C12

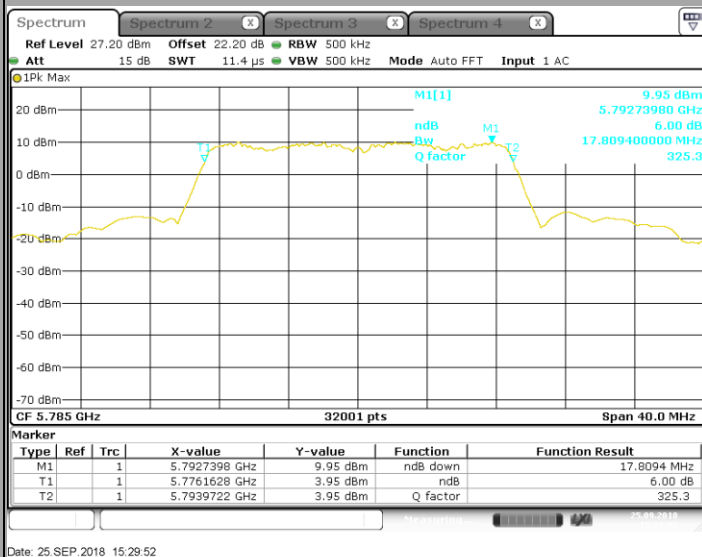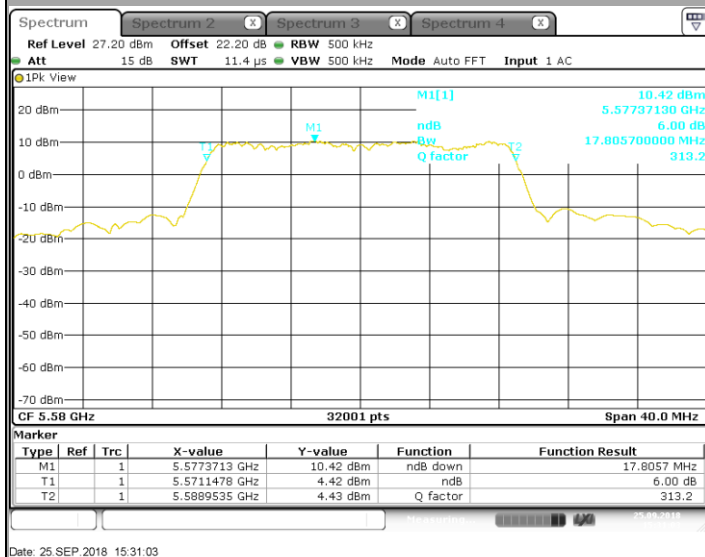



802.11a/802.11nHT20/ac VHT20

Tnom

Vmin

C2

C5

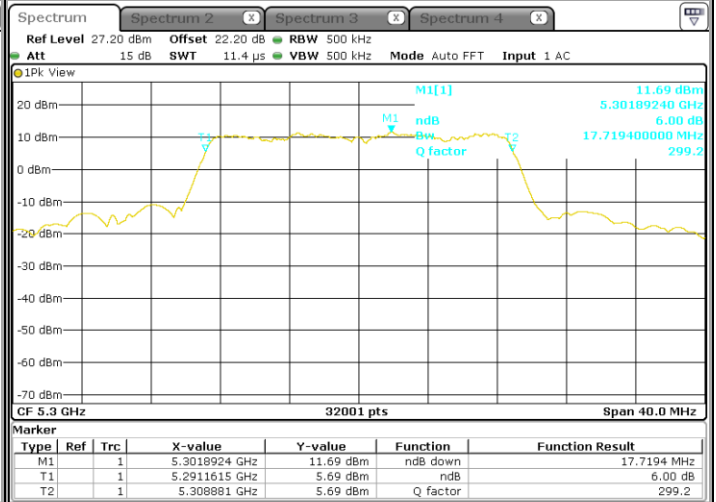
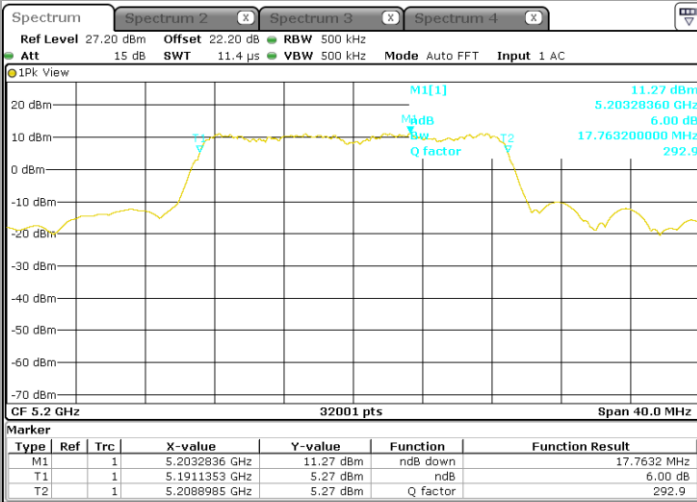


Date: 25 SEP.2018 14:56:27

Date: 25 SEP.2018 14:59:53

C8

C12

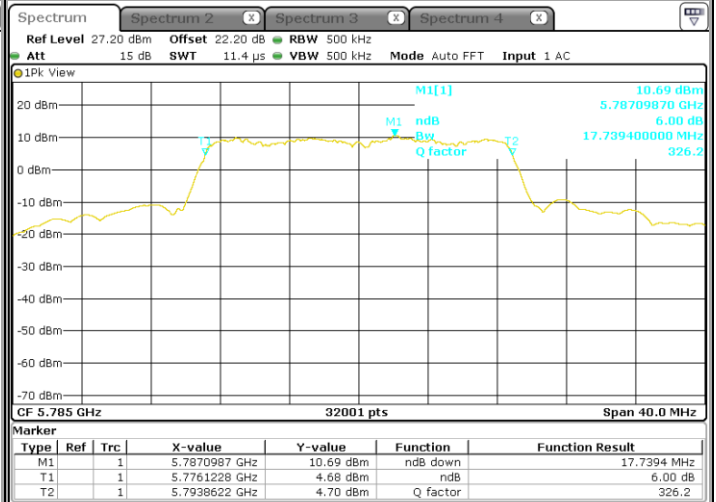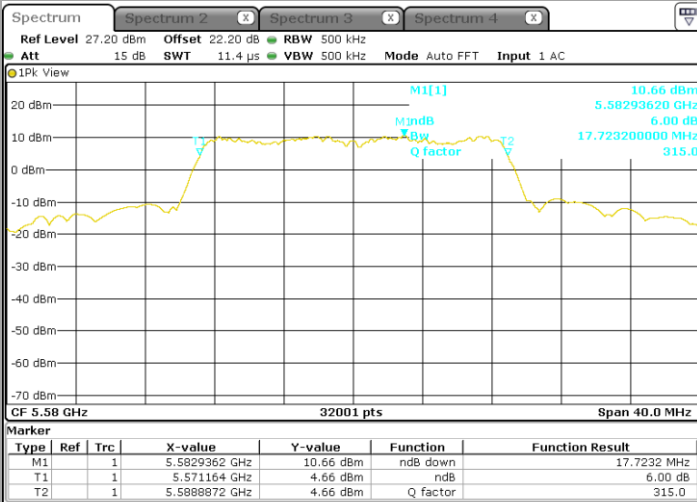

Date: 25 SEP.2018 15:01:11

Date: 25 SEP.2018 15:07:05



802.11a/802.11nHT20/ac VHT20

Tnom

Vnom



C2

C5

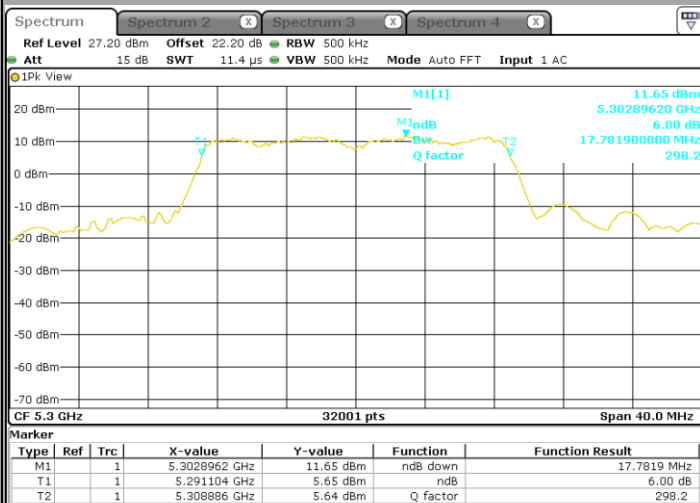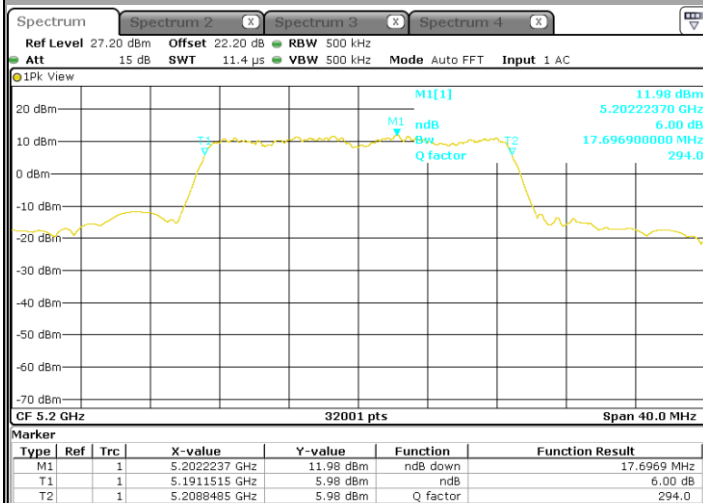

C8

C12

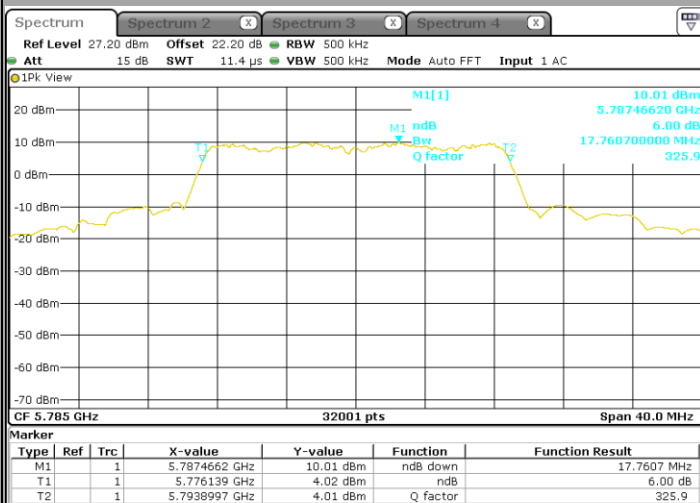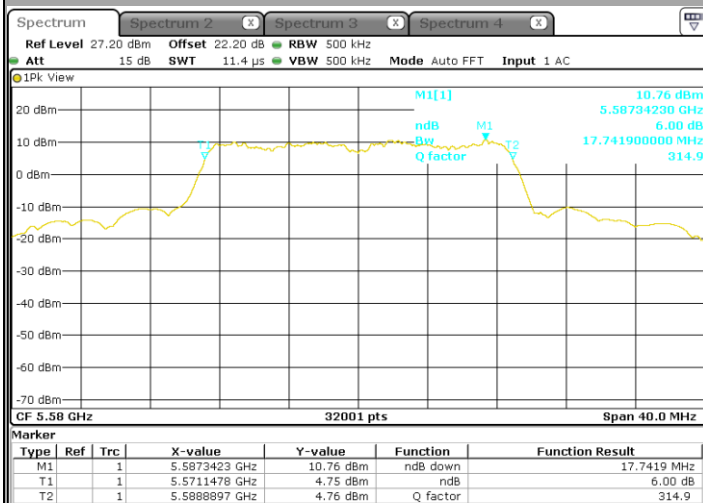



802.11a/802.11nHT20/ac VHT20

Tnom

Vmax



C2

C5

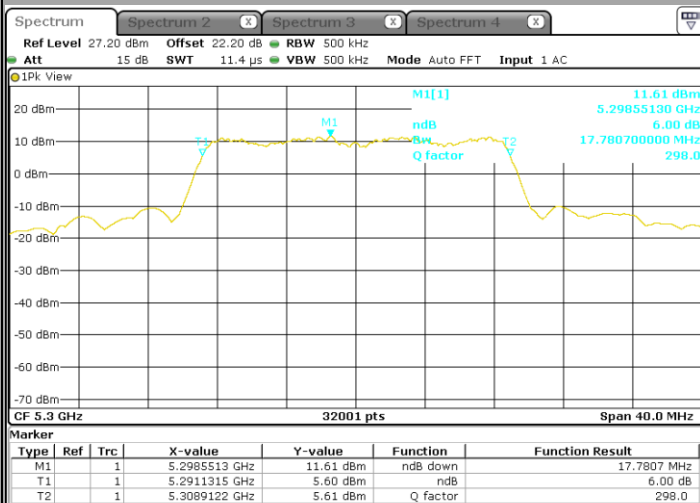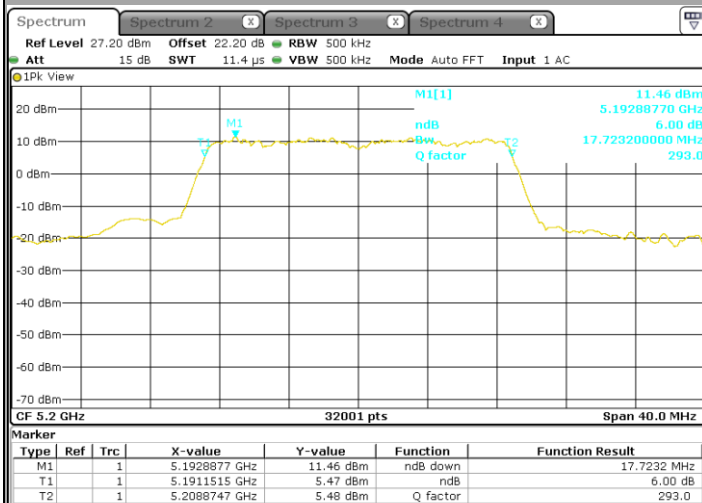

C8

C12

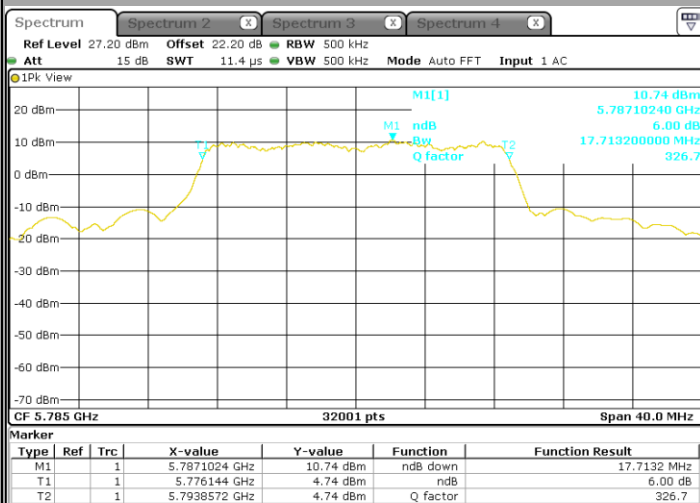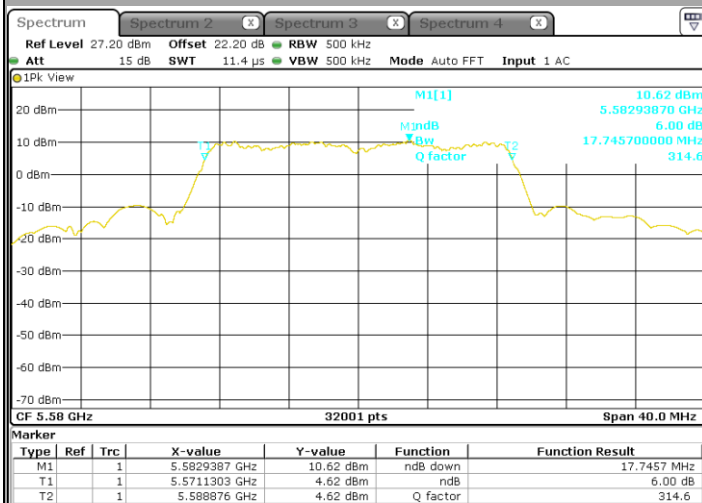



802.11a/802.11nHT20/ac VHT20

Tmax

Vmin

C2

C5

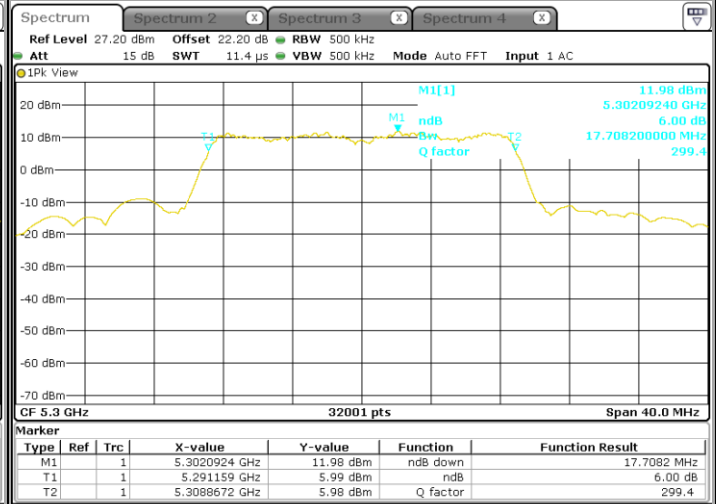
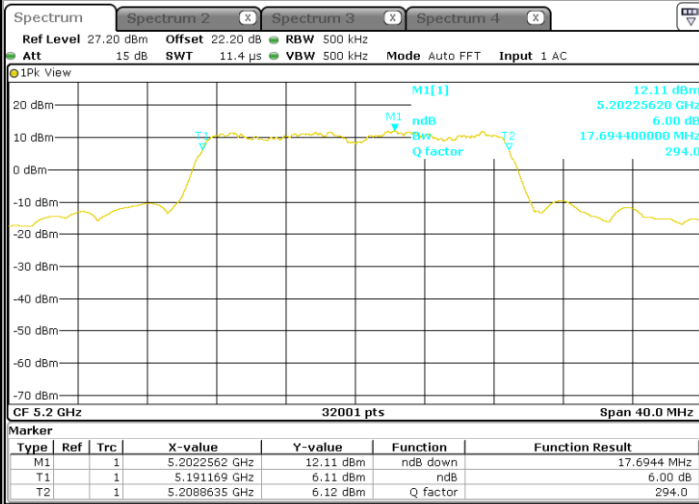


Date: 25 SEP.2018 15:55:35

Date: 25 SEP.2018 16:01:30

C8

C12

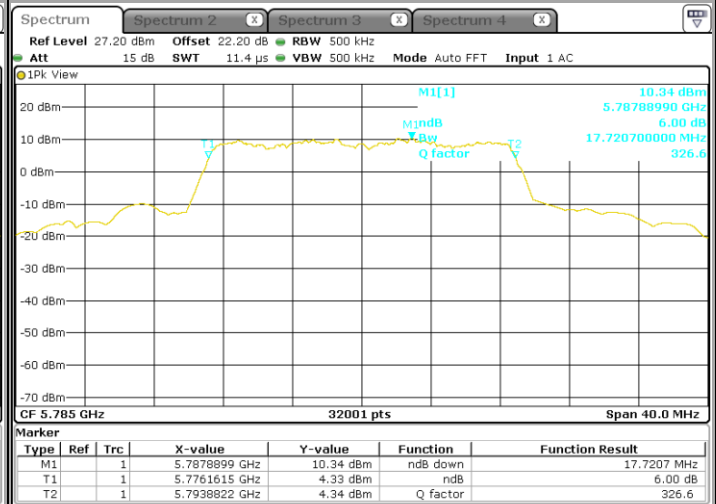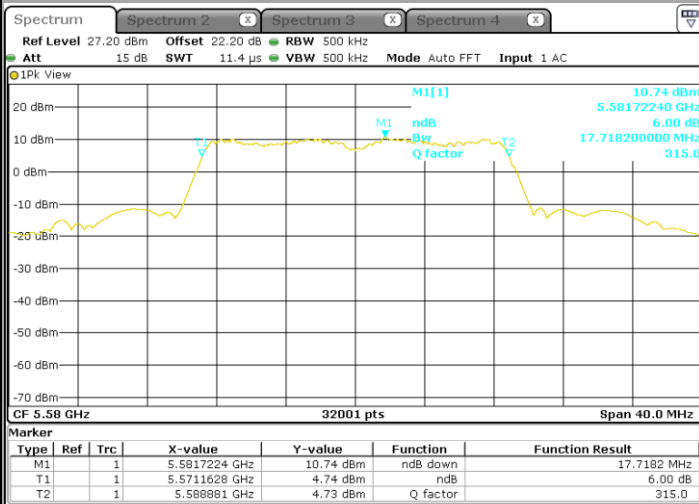

Date: 25 SEP.2018 16:05:15

Date: 25 SEP.2018 16:07:03