


cetecom advanced

Bundesnetzagentur

BNetzA-CAB-02/21-102

TEST REPORT

Test report no.: 23-1-0061401T004a

Testing laboratory

cetecom advanced GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: https://cetecomadvanced.com
e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:
The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

SAGEMCOM BROADBAND SAS
250, route de l´ Empereur
92848 Rueil-Malmaison Cedex / FRANCE
Phone: -/-
Contact: Benjamin Murindangabo
e-mail: benjamin.murindangabo-ext@sagemcom.com

Manufacturer

SAGEMCOM BROADBAND SAS
250, route de l´ Empereur
92848 Rueil-Malmaison Cedex / FRANCE

Test standard/s

FCC - Title 47 CFR Part 15	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	**Video Sound Box**
Model name:	**VSB3918 DISH**
FCC ID:	**VW3VSB3918D**
Frequency:	UNII bands: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz; 5470 MHz to 5725 MHz; 5725 MHz to 5850 MHz
Technology tested:	WLAN
Antenna:	Two integrated antennas
Power supply:	115 V AC by mains
Temperature range:	0°C to 40°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

cn=Michael Dorongovski, o=cetecom advanced GmbH, ou=DOR-230601, email=michael.dorongovski@cetecomadvanced.com, c=DE
2023.08.17 09:13:37 +02'00'

Michael Dorongovski
Lab Manager
Radio Labs

Test performed:

cn=Andreas Kurzkurt, o=cetecom advanced GmbH, ou=KZK-230606, email=andreas.kurzkurt@cetecomadvanced.com, c=DE

Andreas Kurzkurt
Testing Manager
Radio Labs

1 Table of contents

1 Table of contents 2

2 General information 4

2.1 Notes and disclaimer 4
2.2 Application details 4
2.3 Test laboratories sub-contracted 4

3 Test standard/s, references and accreditations 5

4 Reporting statements of conformity – decision rule 6

5 Test environment 7

6 Test item 7

6.1 General description 7
6.2 Additional information 7

7 Description of the test setup 8

7.1 Shielded semi anechoic chamber 9
7.2 Shielded fully anechoic chamber 11
7.3 Radiated measurements > 18 GHz 12
7.4 AC conducted 13
7.5 Conducted measurements with peak power meter & spectrum analyzer 14

8 Sequence of testing 15

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz 15
8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz 16
8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz 17
8.4 Sequence of testing radiated spurious above 18 GHz 18

9 Measurement uncertainty 19

10 Summary of measurement results 20

11 Additional comments 21

12 Measurement results 28

12.1 Identify worst case data rate 28
12.2 Antenna gain 28
12.3 Duty cycle 29
12.4 Maximum output power 30
12.4.1 Maximum output power according to FCC requirements 30
12.5 Power spectral density 33
12.5.1 Power spectral density according to FCC requirements 33
12.6 Minimum emission bandwidth for the band 5.725-5.85 GHz 36
12.7 Spectrum bandwidth / 26 dB bandwidth 39
12.8 Occupied bandwidth / 99% emission bandwidth 42
12.9 Undesirable emissions for transmitters operating in the 5725 MHz to 5850 MHz band 45
12.10 Band edge compliance radiated 54
12.11 Spurious emissions radiated below 30 MHz 69
12.12 Spurious emissions radiated 30 MHz to 1 GHz 84
12.13 Spurious emissions radiated 1 GHz to 40 GHz 88

12.14 Spurious emissions conducted < 30 MHz 109
13 Observations 112
14 Glossary 112
15 Document history 113
16 Accreditation Certificate – D-PL-12076-01-05 113

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.
The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.
The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".
cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.
Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.
Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.
All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.
In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of test item:	2023-06-21
Start of test:*	2023-07-17
End of test:*	2023-08-02
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

Guidance	Version	Description
KDB 789033 D02	v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 662911 D01	v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

Accreditation	Description
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf

ISED Testing Laboratory Recognized Listing Number: DE0001
FCC designation number: DE0002

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.
The measurement uncertainty is mentioned in this test report, see chapter 9 but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

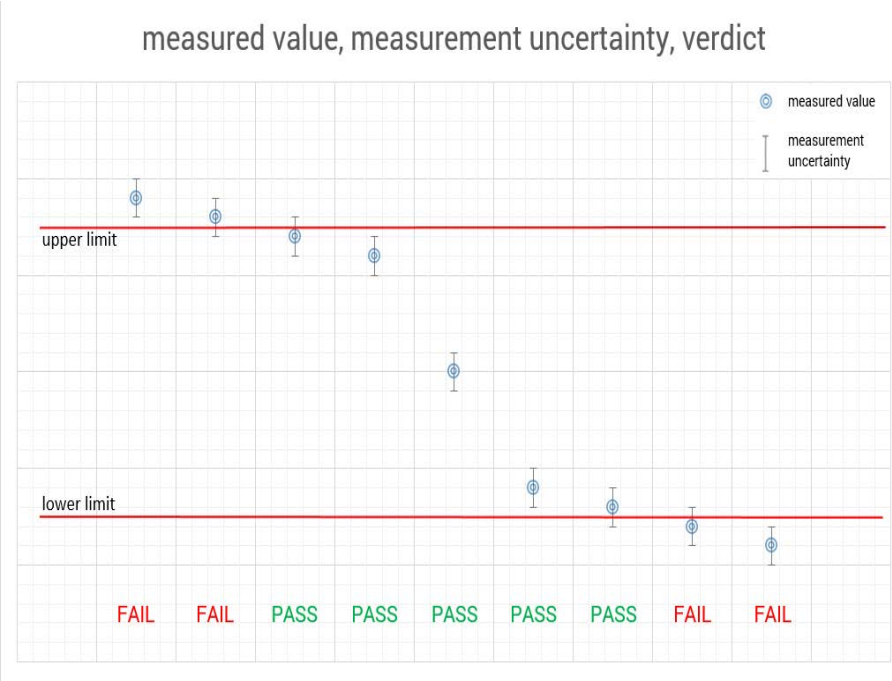

5 Test environment

Temperature :	T_{nom} T_{max} T_{min}	20 °C during room temperature tests No testing under extreme temperature conditions required No testing under extreme temperature conditions required
Relative humidity content :		55 %
Barometric pressure :		Not relevant for this kind of testing
Power supply :	V_{nom} V_{max} V_{min}	115 V AC by mains No testing under extreme voltage conditions required No testing under extreme temperature conditions required

6 Test item

6.1 General description

Kind of test item :	Video Sound Box
Model name :	VSB3918 DISH
S/N serial number :	Rad. Config #1 Cond. Config #3
Hardware status :	CIE : 254051737 CIU : 254033297
Software status :	TTHW compiled Wed 10 May 2023 09:31:07 AM CEST by Jenkins From 0f5de0b Broadcom SDK 22.0.1 Boxmode:2
Firmware status	STB_BCM4375B1_100.010_4375B1_UART_37_4MHz_fcbga_ipa_ref_stbda_class2.hcd
Frequency band :	UNII bands: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz; 5470 MHz to 5725 MHz; 5725 MHz to 5850 MHz
Type of radio transmission : Use of frequency spectrum :	OFDM
Type of modulation :	(D)BPSK, (D)QPSK, 16 – 1024 QAM
Number of channels :	25 with 20 MHz channel bandwidth 12 with 40 MHz channel bandwidth 6 with 80 MHz channel bandwidth
Antenna :	Two integrated antennas
Power supply :	115 V AC by mains
Temperature range :	0°C to 40°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report: 23-1-0061401T004_A2
23-1-0061401T004_A3
23-1-0061401T004_A4

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlkl!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

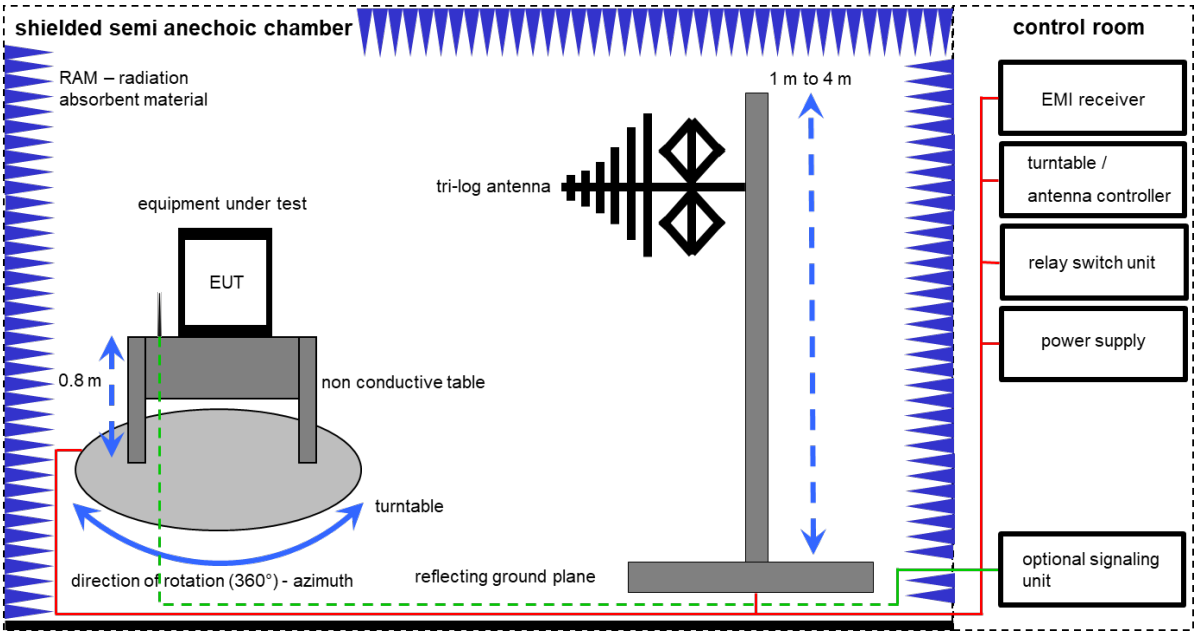

Measurement distance: tri-log antenna 10 meter
EMC32 software version: 10.59.00

FS = UR + CL + AF
(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:
FS [dBµV/m] = 12.35 [dBµV/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dBµV/m] (35.69 µV/m)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG	-/-	300000551	ne	-/-	-/-
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vlKl!	29.12.2021	31.12.2023
4	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
5	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-

6	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
7	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	318	300003696	vlKl!	30.09.2021	29.09.2023
8	A	Turntable	2089-4.0	EMCO	-/-	300004394	ne	-/-	-/-
9	A	PC	TecLine	F+W	-/-	300004388	ne	-/-	-/-
10	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	09.12.2022	31.12.2023

7.2 Shielded fully anechoic chamber

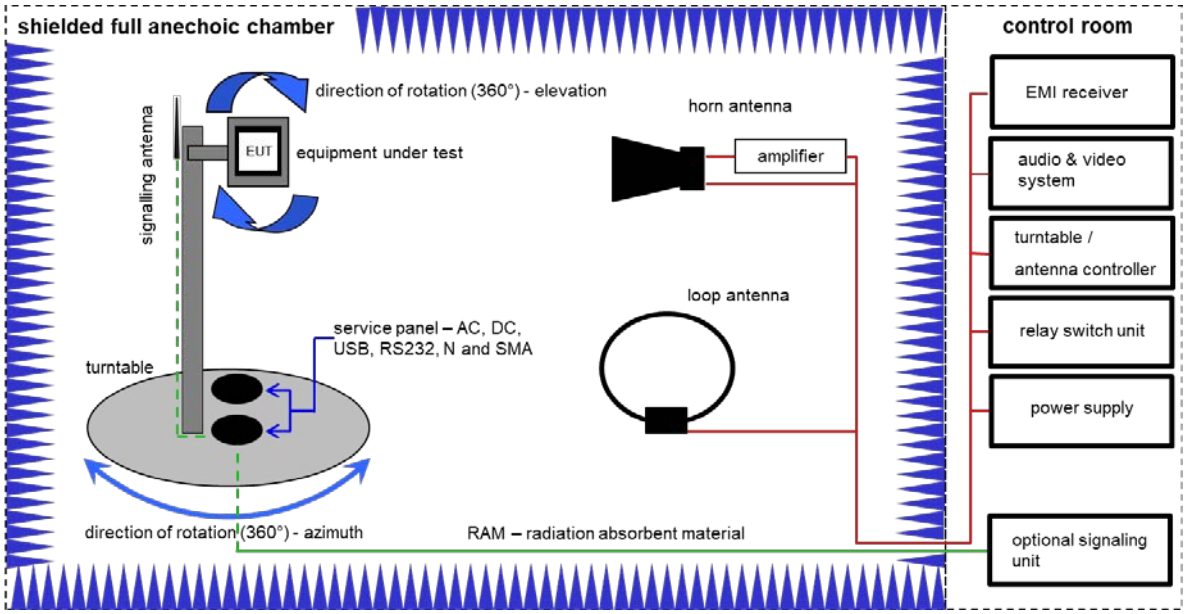

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

FS = UR + CA + AF
(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:
FS [dBµV/m] = 40.0 [dBµV/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dBµV/m] (71.61 µV/m)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	C	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vIKI!	01.07.2021	31.07.2023
2	A, B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032		02.08.2021	31.08.2023
3	A, B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	-/-	-/-
4	A, B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
5	A, B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
6	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
7	A, B, C	NEXIO EMV-Software	BAT EMC V2022.0.22.0	Nexio	-/-	300004682	ne	-/-	-/-
8	A, B, C	Anechoic chamber	-/-	TDK	-/-	300003726	ne	-/-	-/-
9	A, B, C	EMI Test Receiver 9kHz-26,5GHz	ESR26	Rohde & Schwarz	101376	300005063	k	13.12.2022	31.12.2023
10	B	Band Reject Filter	WRCJV12-5120-5150-5350-5380-40SS	Wainwright	5	300005168	ev	-/-	-/-
11	B	Band Reject Filter	WRCJV12-5695-5725-5850-5880-40SS	Wainwright	5	300005169	ev	-/-	-/-
12	B	Band Reject Filter	WRCJV16-5440-5470-5725-5755-40SS	Wainwright	9	300005170	ev	-/-	-/-
13	A, B	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011571	300005240	ev	-/-	-/-

NOTE: The radiated tests were finished before the 2023-07-31.

7.3 Radiated measurements > 18 GHz

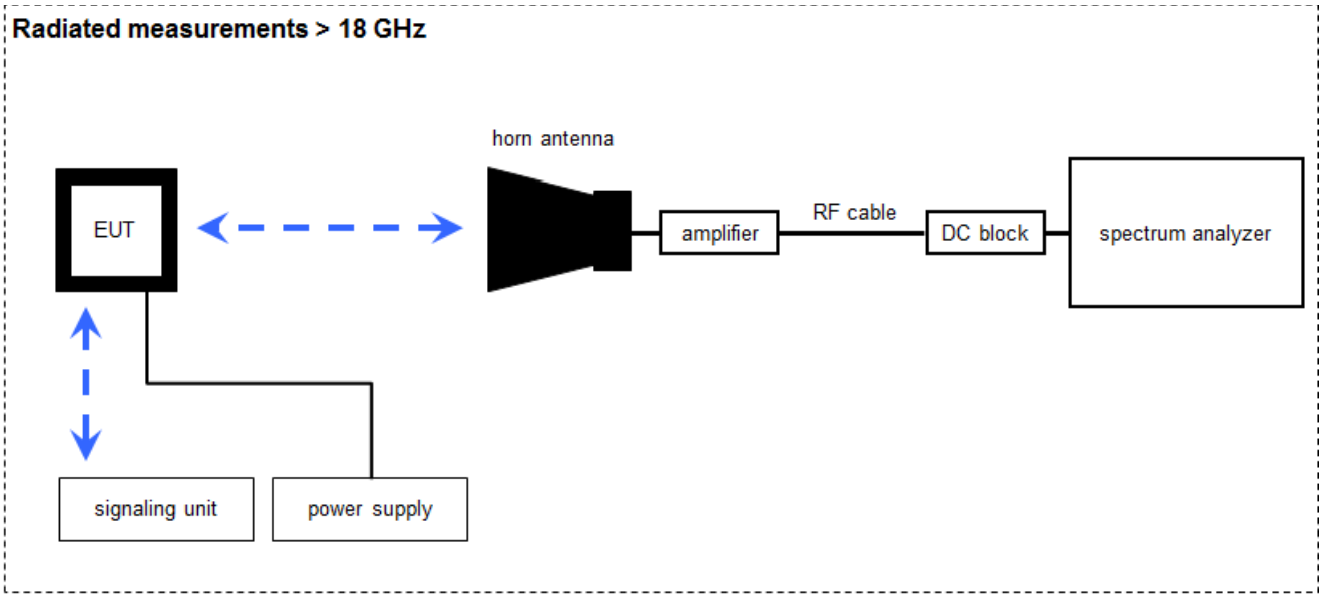

Measurement distance: horn antenna 50 cm

FS = UR + CA + AF
(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:
FS [dBµV/m] = 40.0 [dBµV/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dBµV/m] (6.79 µV/m)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	01096	300000486	vlKl!	17.01.2022	31.01.2024
3	A	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	82-16	300000510	vlKl!	17.01.2022	31.01.2024
4	A	Broadband Low Noise Amplifier 18-50 GHz	CBL18503070-XX	CERNEX	19338	300004273	ev	-/-	-/-
5	A	Signal analyzer	FSV40	Rohde&Schwarz	101353	300004819	k	08.12.2022	31.12.2023
6	A	Signal- and Spectrum Analyzer 2 Hz - 50 GHz	FSW50	Rohde&Schwarz	101560	300006179	k	04.04.2023	30.04.2024
7	A	RF-Cable	ST18/SMAm/SMAm /48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
8	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-

7.4 AC conducted

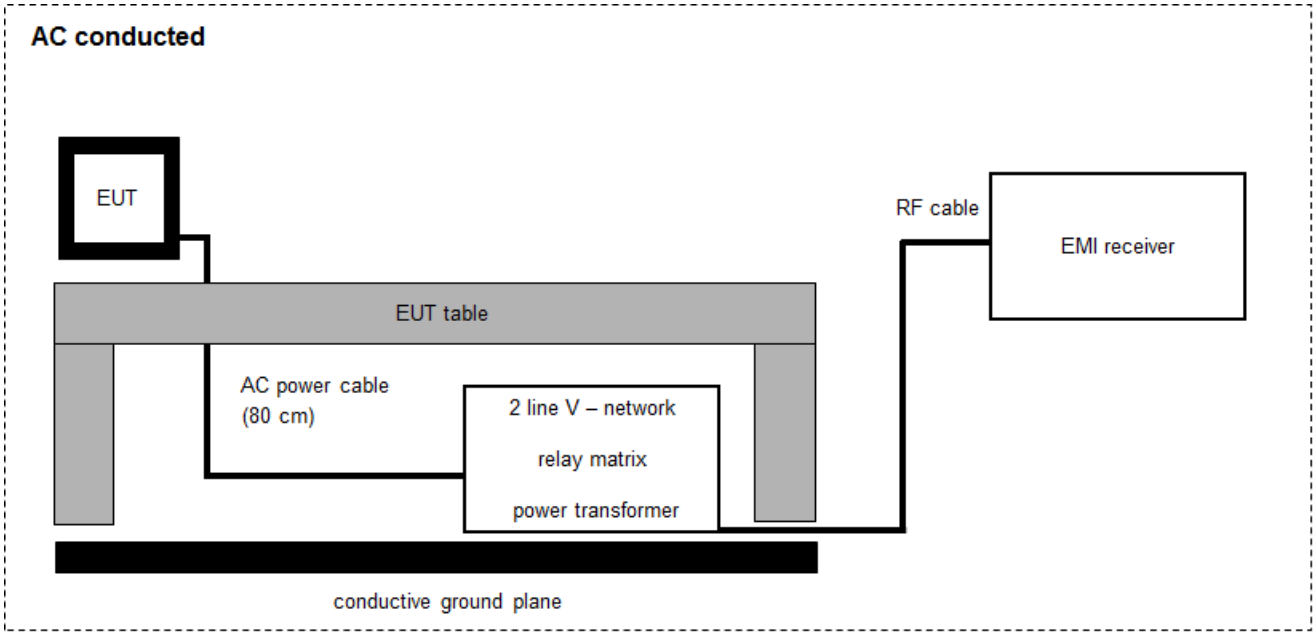

FS = UR + CF + VC
(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:
FS [dBµV/m] = 37.62 [dBµV/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dBµV/m] (244.06 µV/m)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	Rohde & Schwarz	892475/017	300002209	vIKI!	14.12.2021	31.12.2023
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
4	A	PC	TecLine	F+W	-/-	300003532	ne	-/-	-/-
5	A	EMI Test Receiver 3.6 GHz	ESR3	Rohde & Schwarz	102981	300006318	k	09.12.2022	31.12.2023

7.5 Conducted measurements with peak power meter & spectrum analyzer

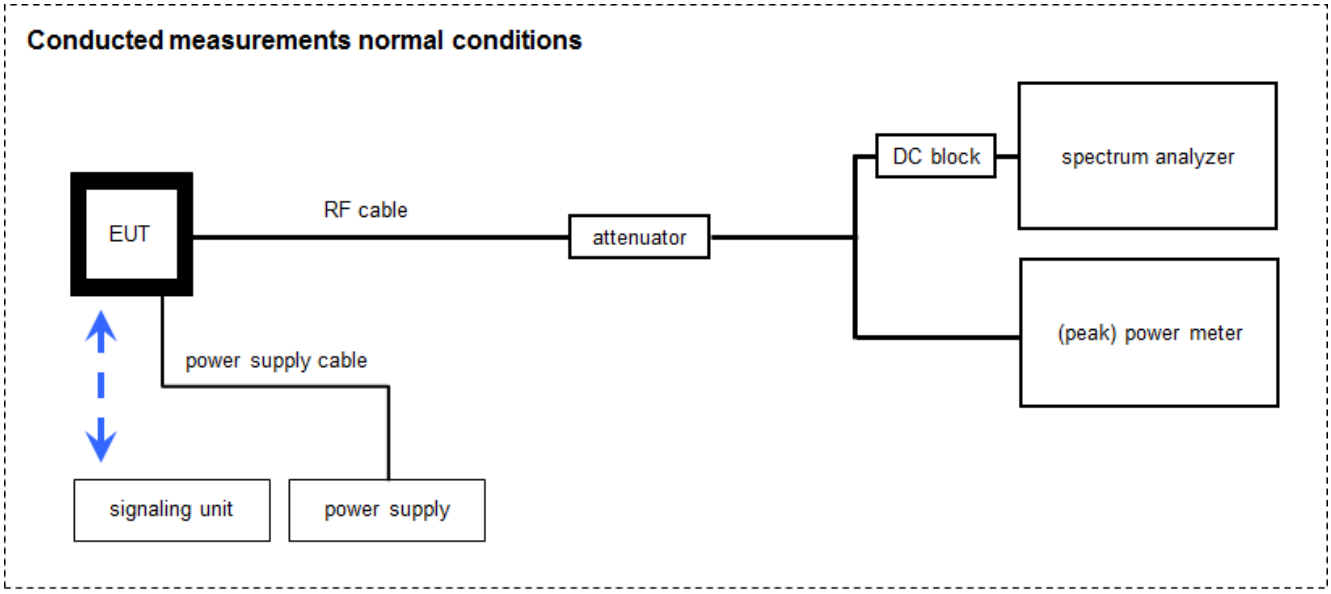

WLAN tester version: 1.1.13; LabView2015

OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:
OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A, B	Isolating Transformer	RT5A	Grundig	12780	300001166	ev	-/-	-/-
2	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	12.12.2022	31.12.2023
3	A, B	PC Tester R005	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A4523	300004589	ne	-/-	-/-
4	A, B	RF-Cable	ST18/SMAm/SMAm/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
5	A, B	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-
6	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	-/-	400001186	ev	-/-	-/-
7	A, B	Tester Software RadioStar (C.BER2 for BT Conformance)	Version 1.0.0.X	CTC advanced GmbH	0001	400001380	ne	-/-	-/-

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position ± 45° and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

9 Measurement uncertainty

Measurement uncertainty		
Test case	**Uncertainty**	
Antenna gain	± 3 dB	
Power spectral density	± 1.56 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.56 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.56 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

10 Summary of measurement results

☒	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☐	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Title 47 Part 15 RSS 247, Issue 2	See table	2023-08-17	-/-

Test specification clause	Test case	C	NC	NA	NP	Remark
-/-	Output power verification (cond.)	-/-				Declared
-/-	Antenna gain	-/-				Declared
U-NII Part 15	Duty cycle	-/-				-/-
§15.407(a) RSS - 247 (6.2.x.1)	Maximum output power (conducted & radiated)	☒	☐	☐	☐	-/-
§15.407(a) RSS - 247 (6.2.x.1)	Power spectral density	☒	☐	☐	☐	-/-
RSS - 247 (6.2.4.1)	Spectrum bandwidth 6dB bandwidth	☒	☐	☐	☐	-/-
§15.407(a) RSS - 247 (6.2.x.2)	Spectrum bandwidth 26dB bandwidth	☒	☐	☐	☐	-/-
RSS Gen clause 6.6	Spectrum bandwidth 99% bandwidth	-/-				-/-
§15.205 RSS - 247 (6.2.x.2)	Band edge compliance radiated	☒	☐	☐	☐	-/-
§15.407(b) RSS - 247 (6.2.x.2)	TX spurious emissions radiated	☒	☐	☐	☐	-/-
§15.109 RSS-Gen	RX spurious emissions radiated	☐	☐	☐	☒	-/-
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	☒	☐	☐	☐	-/-
§15.107(a) §15.207	Spurious emissions conducted emissions< 30 MHz	☒	☐	☐	☐	-/-
§15.407 RSS - 247 (6.3)	DFS	-/-				See report 23-1-0061401T005

Notes:

C:	Compliant	NC:	Not compliant	NA:	Not applicable	NP:	Not performed

11 Additional comments

Reference documents:	DFS report: 23-1-0061401T004 DIW377DISH - WiFi test commands_V2.docx
Special test descriptions:	In U-NII-1 & U-NII-2A & U-NII-2C bands the power settings have been reduced to be compliant with the radiated band edge requirement, or output power, or power density requirement. In U-NII-3 band the power settings have been reduced to be compliant with the spectrum mask as per FCC Part 15.407 (b)(4) and KDB 789033 II.G.2 (c) (ii).
Configuration descriptions:	All tests were performed with both chains active. SISO modes are not supported.

Provided channels and used power settings for all modes:

a-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	**36**	**40**	44	**48**	**52**	**56**	60	**64**
f_c / MHz	**5180**	**5200**	5220	**5240**	**5260**	**5280**	5300	**5320**
Power setting *)	**69**	**73**	-/-	**74**	**74**	**74**	-/-	**70**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	**100**	104	108	112	116	**120**	124	128	132	136	**144**
f_c / MHz	**5500**	5520	5540	5560	5580	**5600**	5620	5640	5660	5680	**5720**
Power setting *)	**76**	-/-	-/-	-/-	-/-	**75**	-/-	-/-	-/-	-/-	**75**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	**149**	153	**157**	161	**165**
f_c / MHz	**5745**	5765	**5785**	5805	**5825**
Power setting *)	**96**	-/-	**96**	-/-	**96**

nHT20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	**36**	**40**	44	**48**	**52**	**56**	60	**64**
f_c / MHz	**5180**	**5200**	5220	**5240**	**5260**	**5280**	5300	**5320**
Power setting *)	**68**	**72**	-/-	**76**	**75**	**75**	-/-	**70**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	**100**	104	108	112	116	**120**	124	128	132	136	**144**
f_c / MHz	**5500**	5520	5540	5560	5580	**5600**	5620	5640	5660	5680	**5720**
Power setting *)	**75**	-/-	-/-	-/-	-/-	**76**	-/-	-/-	-/-	-/-	**76**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	**149**	153	**157**	161	**165**
f_c / MHz	**5745**	5765	**5785**	5805	**5825**
Power setting *)	**96**	-/-	**96**	-/-	**96**

acVHT20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	**36**	**40**	44	**48**	**52**	**56**	60	**64**
f_c / MHz	**5180**	**5200**	5220	**5240**	**5260**	**5280**	5300	**5320**
Power setting *)	**68**	**75**	-/-	**76**	**76**	**76**	-/-	**70**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	**100**	104	108	112	116	**120**	124	128	132	136	**144**
f_c / MHz	**5500**	5520	5540	5560	5580	**5600**	5620	5640	5660	5680	**5720**
Power setting *)	**74**	-/-	-/-	-/-	-/-	**76**	-/-	-/-	-/-	-/-	**76**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	**149**	153	**157**	161	**165**
f_c / MHz	**5745**	5765	**5785**	5805	**5825**
Power setting *)	**96**	-/-	**96**	-/-	**96**

axHE20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	**36**	**40**	44	**48**	**52**	**56**	60	**64**
f_c / MHz	**5180**	**5200**	5220	**5240**	**5260**	**5280**	5300	**5320**
Power setting *)	**64**	**76**	-/-	**76**	**76**	**76**	-/-	**66**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	**100**	104	108	112	116	**120**	124	128	132	136	**144**
f_c / MHz	**5500**	5520	5540	5560	5580	**5600**	5620	5640	5660	5680	**5720**
Power setting *)	**76**	-/-	-/-	-/-	-/-	**76**	-/-	-/-	-/-	-/-	**76**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	**149**	153	**157**	161	**165**
f_c / MHz	**5745**	5765	**5785**	5805	**5825**
Power setting *)	**96**	-/-	**96**	-/-	**96**

nHT40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	**38**	**46**	**54**	**62**
f_c / MHz	**5190**	**5230**	**5270**	**5310**
Power setting *)	**50**	**79**	**82**	**52**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency					
channel	**102**	110	**118**	126	**134**
f_c / MHz	**5510**	5550	**5590**	5630	**5670**
Power setting *)	**62**	-/-	**80**	-/-	**80**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency		
channel	**151**	**159**
f_c / MHz	**5755**	**5795**
Power setting *)	**96**	**96**

acVHT40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	**38**	**46**	**54**	**62**
f_c / MHz	**5190**	**5230**	**5270**	**5310**
Power setting *)	**50**	**79**	**79**	**52**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency					
channel	**102**	110	**118**	126	**134**
f_c / MHz	**5510**	5550	**5590**	5630	**5670**
Power setting *)	**62**	-/-	**80**	-/-	**80**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency		
channel	**151**	**159**
f_c / MHz	**5755**	**5795**
Power setting *)	**96**	**96**

axHE40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	**38**	**46**	**54**	**62**
f_c / MHz	**5190**	**5230**	**5270**	**5310**
Power setting *)	**44**	**79**	**79**	**46**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency					
channel	**102**	110	**118**	126	**134**
f_c / MHz	**5510**	5550	**5590**	5630	**5670**
Power setting *)	**56**	-/-	**80**	-/-	**79**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency		
channel	**151**	**159**
f_c / MHz	**5755**	**5795**
Power setting *)	**96**	**96**

acVHT80-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency		
channel	**42**	**58**
f_c / MHz	**5210**	**5290**
Power setting *)	**48**	**48**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency			
channel	**106**	**122**	**138**
f_c / MHz	**5530**	**5610**	**5690**
Power setting *)	**52**	**80**	**82**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency	
channel	**155**
f_c / MHz	**5775**
Power setting *)	**88**

axHE80-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency		
channel	**42**	**58**
f_c / MHz	**5210**	**5290**
Power setting *)	**46**	**46**

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency			
channel	**106**	**122**	**138**
f_c / MHz	**5530**	**5610**	**5690**
Power setting *)	**48**	**82**	**82**

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency	
channel	**155**
f_c / MHz	**5775**
Power setting *)	**88**

EUT selection:

☐ Only one device available

☐ Devices selected by the customer

☒ Devices selected by the laboratory (Randomly)

Test mode:

☐ No test mode available.
Iperf is used to transmit data to a companion device

☒ Special software is used.
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

☐ Operating mode 1 (single antenna)
- Equipment with 1 antenna,
- Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
- Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)

☒ Operating mode 2 (multiple antennas, no beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.

☐ Operating mode 3 (multiple antennas, with beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
  In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

12 Measurement results

12.1 Identify worst case data rate

Declared by the customer:

OFDM – mode	Modulation scheme / bandwidth					
	U-NII-1 & U-NII-2A		U-NII-2C		U-NII-3	
	lowest channel	highest channel	lowest channel	highest channel	lowest channel	highest channel
a – mode	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s	6 Mbit/s
n HT20 – mode	MCS8	MCS8	MCS8	MCS8	MCS8	MCS8
ac VHT20	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2
ax HE20	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2
n HT40 – mode	MCS8	MCS8	MCS8	MCS8	MCS8	MCS8
ac VHT40 – mode	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2
ax HE40 - mode	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2
ac VHT80 – mode	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2	MCS0NSS2
ax HE80 – mode	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2	HE0NSS2

12.2 Antenna gain

Declared by the manufacturer (see referenced documents).

UNII-1/2A: 6.2dBi combined gain
UNII-2C/3: 6.3dBi combined gain

12.3 Duty cycle

Description:

The duty cycle is necessary to compute the maximum power during an actual transmission. The shown plots and values are to show an example of the measurement procedure. The real value is measured direct during the power measurement or power density measurement. The correction value is shown in each plot of these measurements.

Measurement:

Measurement parameter	
According to: KDB789033 D02, B.	
External result file(s)	23-1-00614001T004_A6a-h.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.5 – A
Measurement uncertainty:	See chapter 9

Results:

Duty cycle and correction factor:

OFDM – mode	Calculation method			
	T_{on} ($D2_{plot}$) * 100 / $T_{complete}$ ($D3_{plot}$) = duty cycle 10 * log(duty cycle) = correction factor			
	T_{on} ($D2_{plot}$)	$T_{complete}$ ($D3_{plot}$)	Duty cycle	Correction factor
a – mode	-/-	-/-	100%	0 dB
n20 – mode	-/-	-/-	100%	0 dB
ac20 – mode	-/-	-/-	100%	0 dB
ax20 – mode	-/-	-/-	100%	0 dB
n40 – mode	-/-	-/-	100%	0 dB
ac40 – mode	-/-	-/-	100%	0 dB
ax40 – mode	-/-	-/-	100%	0 dB
ac80 – mode	-/-	-/-	100%	0 dB
ax80 – mode	-/-	-/-	100%	0 dB

12.4 Maximum output power

12.4.1 Maximum output power according to FCC requirements

Description:

Measurement of the maximum output power conducted

Measurement:

Measurement parameter	
According to: KDB789033 D02, E.2.e.	
External result file(s)	23-1-00614001T004_A6a-h.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.5 – A
Measurement uncertainty:	See chapter 9
Standard parts:	FCC: § 15.407 (a)

Limits:

Limits	
Radiated output power	**Conducted output power**
Band 5150 MHz – 5250 MHz	
Conducted power + 6 dBi antenna gain	**For client devices** output power ≤ 250 mW/24dBm
Band 5250MHz – 5350 MHz	
Conducted power + 6 dBi antenna gain	Output power ≤ lesser of 250mW or 11dBm +10logB (B is the 26 dB emission bandwidth in megahertz)
Band 5470MHz – 5725 MHz	
Conducted power + 6 dBi antenna gain	Output power ≤ lesser of 250mW or 11dBm +10logB (B is the 26 dB emission bandwidth in megahertz)
Band 5725MHz – 5850 MHz	
Conducted power + 6 dBi antenna gain	output power ≤ 1W/30dBm

*If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. This leads to the following limits:

Bands	UNII-1	UNII-2A	UNII-2C	UNII-3
Limits [dBm]	23.8	23.8	23.7	29.7

Results:

802.11a Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	18.5	19.5	19.5	19.8	19.7	18.4	18.4	19.5	19.4	24.0	24.1	23.6
Port 2	17.4	18.6	18.9	18.8	18.6	17.4	17.4	18.8	19.0	24.0	24.0	23.9
SUM	21.0	22.1	22.2	22.4	22.2	20.9	20.9	22.2	22.2	27.0	27.0	26.7

802.11nHT20 Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	18.1	19.2	20.0	20.2	19.8	19.8	18.5	19.8	19.6	24.0	24.0	23.5
Port 2	17.0	18.3	19.5	19.3	19.1	19.1	17.9	19.2	19.3	24.3	24.1	23.9
SUM	20.6	21.8	22.7	22.8	22.5	22.5	21.2	22.6	22.5	27.2	27.2	26.7

802.11ac VHT20 Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	18.2	19.8	20.1	20.2	20.1	18.3	18.5	19.9	19.8	24.3	24.0	23.5
Port 2	17.4	19.1	19.5	19.4	19.4	17.9	17.8	19.3	19.2	24.4	24.1	23.9
SUM	21.4	22.5	22.8	22.9	22.8	21.1	21.2	22.6	22.5	27.4	27.1	26.7

802.11ax20 Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	17.5	20.2	20.2	20.3	20.2	17.6	19.4	20.1	20.0	24.2	24.4	23.7
Port 2	16.8	19.5	19.9	19.7	19.6	17.1	18.6	19.5	19.4	24.4	24.3	24.1
SUM	20.1	22.9	23.0	23.0	22.9	20.4	22.0	22.8	22.7	27.3	27.3	26.9

802.11 n HT40 Maximum output power [dBm]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	13.1	20.7	21.0	13.7	15.5	20.9	21.0	24.5	24.4
Port 2	12.5	20.5	20.1	12.9	14.4	20.0	20.3	24.3	24.0
SUM	15.8	23.6	23.5	16.3	18.0	23.5	23.7	27.4	27.2

802.11 ac VHT40 Maximum output power [dBm]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	13.7	20.8	21.1	13.8	15.6	21.0	20.9	24.6	24.5
Port 2	12.8	20.5	20.0	13.2	14.3	19.8	20.1	24.3	24.1
SUM	16.3	23.7	23.6	16.5	18.0	23.4	23.5	27.5	27.3

802.11 ax HE40 Maximum output power [dBm]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	12.2	20.8	21.1	12.6	14.3	21.0	20.9	23.9	23.7
Port 2	11.2	20.6	20.3	11.5	13.0	20.1	20.1	23.7	23.3
SUM	14.8	23.7	23.7	15.1	16.7	23.6	23.5	26.8	26.5

802.11 ac VHT80 Maximum output power [dBm]						
Channel	42	58	106	122	138	155
Port 1	12.9	13.1	13.3	20.4	20.6	22.6
Port 2	12.2	12.1	12.3	20.2	20.3	22.1
SUM	15.6	15.7	15.8	23.3	23.4	25.4

802.11 ax HE80 Maximum output power [dBm]						
Channel	42	58	106	122	138	155
Port 1	11.9	11.9	11.6	20.1	20.2	21.9
Port 2	11.2	11.0	10.7	19.9	20.0	21.5
SUM	14.6	14.5	14.2	23.0	23.1	24.7

12.5 Power spectral density

12.5.1 Power spectral density according to FCC requirements

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to: KDB789033 D02, F.	
External result file(s)	23-1-00614001T004_A6a-h.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.5 – A
Measurement uncertainty:	See chapter 9
Standard parts:	FCC: § 15.407 (a)

Limits:

Power Spectral Density
Band 5150 MHz – 5250 MHz
For client devices point power spectral density conducted ≤ 11 dBm in any 1 MHz band*
Band 5250MHz – 5350 MHz
power spectral density conducted ≤ 11 dBm in any 1 MHz band*
Band 5470MHz – 5725 MHz
power spectral density conducted ≤ 11 dBm in any 1 MHz band*
Band 5725MHz – 5850 MHz
power spectral density conducted ≤ 30 dBm in any 500 kHz band*

*If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. This leads to the following limits:

Bands	UNII-1	UNII-2A	UNII-2C	UNII-3
Limits [dBm]	10.8	10.8	10.7	29.7

Results:

802.11 a Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	8.0	7.8	7.8	8.1	8.0	7.9	7.9	7.8	7.7	9.1	9.3	8.8
Port 2	6.9	6.9	7.1	7.1	6.9	7.0	7.0	7.1	7.3	9.5	9.3	9.2
SUM	10.5	10.4	10.5	10.6	10.5	10.5	10.5	10.5	10.5	12.3	12.3	12.0

802.11 n HT20 Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	7.3	7.2	7.9	8.1	7.8	7.8	7.7	7.8	7.6	9.0	9.1	8.3
Port 2	6.2	6.2	7.4	7.2	7.1	7.1	7.1	7.2	7.2	9.3	9.1	8.9
SUM	9.8	9.7	10.7	10.7	10.4	10.4	10.4	10.5	10.4	12.1	12.1	11.6

802.11 ac VHT20 Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	7.5	7.8	8.0	8.2	8.1	7.5	7.7	7.8	7.7	9.2	9.0	8.5
Port 2	6.6	7.1	7.4	7.3	7.4	7.1	7.0	7.3	7.2	9.3	9.1	8.9
SUM	10.1	10.5	10.8	10.8	10.7	10.3	10.4	10.6	10.5	12.3	12.1	11.7

802.11ax HE20 Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	5.1	7.9	7.8	7.9	7.9	5.2	7.0	7.8	7.6	8.9	9.0	8.3
Port 2	4.4	7.1	7.5	7.3	7.2	4.8	6.3	7.1	7.1	9.0	8.9	8.8
SUM	7.8	10.5	10.6	10.6	10.6	8.0	9.7	10.5	10.4	11.9	12.0	11.6

802.11 n HT40 Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	-0.5	5.8	6.1	0.1	1.9	6.1	6.2	6.6	6.7
Port 2	-1.1	5.6	5.2	-0.7	0.7	5.1	5.5	6.5	6.2
SUM	2.2	8.7	8.7	2.7	4.4	8.7	8.9	9.6	9.5

802.11 ac VHT40 Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	0.1	5.9	6.2	0.2	1.9	6.2	6.1	6.6	6.6
Port 2	-0.8	5.7	5.1	-0.4	0.6	4.9	5.3	6.4	6.3
SUM	2.7	8.8	8.7	2.9	4.3	8.6	8.7	9.5	9.5

802.11ax HE40 Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	-2.9	5.8	6.1	-2.4	-0.7	6.1	5.8	6.7	6.6
Port 2	-3.8	5.6	5.2	-3.5	-1.9	5.0	5.1	6.5	6.2
SUM	-0.3	8.7	8.7	0.1	1.7	5.6	8.5	9.6	9.4

802.11 ac VHT80 Power spectral density [dBm/1MHz] or [dBm/500kHz]						
Channel	42	58	106	122	138	155
Port 1	-3.5	-3.1	-3.1	2.5	2.8	1.8
Port 2	-4.2	-4.2	-4.3	2.3	2.4	1.2
SUM	-0.8	-0.6	-0.6	5.4	5.6	4.5

802.11ax HE80 Power spectral density [dBm/1MHz] or [dBm/500kHz]						
Channel	42	58	106	122	138	155
Port 1	-5.7	-5.5	-6.0	2.5	2.6	1.8
Port 2	-6.3	-6.5	-7.0	2.3	2.5	1.4
SUM	-3.0	-3.0	-3.5	5.4	5.6	4.6

12.6 Minimum emission bandwidth for the band 5.725-5.85 GHz

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to: KDB789033 D02, C.2.	
External result file(s)	23-1-00614001T004_A6a-h.pdf FCC Part 15.407 & ISED Minimum Emission BW
Used test setup:	See chapter 7.5 – A
Measurement uncertainty:	See chapter 9

Limits:

FCC	ISED
The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:

a	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
Port 1	16.35	16.35	16.35
Port 2	16.35	16.35	16.30

n HT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
Port 1	17.6	17.6	17.6
Port 2	17.6	17.6	17.6

ac HT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
Port 1	17.6	17.6	17.6
Port 2	17.6	17.6	17.6

ax HE20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
Port 1	19.0	19.0	19.0
Port 2	19.0	19.0	18.8

Results:

n HT40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
Port 1	36.3	36.0
Port 2	36.3	36.3

ac VHT40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
Port 1	36.3	36.3
Port 2	36.3	36.3

ax HE40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
Port 1	36.7	36.4
Port 2	37.7	37.7

Results:

ac VHT80	6 dB emission bandwidth (MHz)
	U-NII-3 (5725 MHz to 5850 MHz)
	Middle channel
Port 1	76.0
Port 2	76.4

ax VHT80	6 dB emission bandwidth (MHz)
	U-NII-3 (5725 MHz to 5850 MHz)
	Middle channel
Port 1	76.2
Port 2	75.2

12.7 Spectrum bandwidth / 26 dB bandwidth

Description:

Measurement of the 26 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to: KDB789033 D02, C.1.	
External result file(s)	23-1-00614001T004_A6a-h.pdf FCC Part 15.407 & ISED Bandwidths
Used test setup:	see chapter 7.5 – A
Measurement uncertainty:	See chapter 9

Limits:

Spectrum Bandwidth – 26 dB Bandwidth
IC: Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band. **FCC:** Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

802.11a 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	21.4	21.7	21.6*	21.6	21.6	21.4	21.4	21.6	21.6	35.5	38.7	39.3
Port 2	21.4	17.1	21.7*	21.6	21.6	21.6	21.7	21.7	21.6	35.6	38.7	39.0

802.11n HT20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	21.7	22.0	22.0*	26.0	22.0	21.7	21.7	22.0	22.0	40.0	40.0	40.0
Port 2	21.5	21.8	26.4*	23.5	21.7	21.6	21.4	22.1	21.8	39.9	40.0	39.9

802.11ac VHT20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	21.9	22.4	23.7*	23.7	22.0	21.9	21.7	22.0	22.0	39.9	40.0	40.0
Port 2	21.5	21.9	23.4*	22.1	22.2	21.6	21.7	22.1	21.7	39.2	40.0	40.0

802.11ax HE20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	22.0	22.5	21.8*	22.0	21.9	22.0	21.9	21.8	22.1	39.8	40.0	40.0
Port 2	21.7	23.3	23.3*	23.4	22.0	21.7	22.0	21.9	21.7	39.4	40.0	40.0

Where the 26dB emission bandwidth extends the band 5150MHz to 5250 MHz (channel 48) the 99% bandwidth was used in lieu of the 26dB bandwidth (see KDB 789033 D02 B.2.a) (i)).

Where the 26dB emission bandwidth does extend the 5725 – 5850 MHz band the 20dB bandwidth was measured to show compliance with §15.215(c). The 20dB bandwidth is reported in **23-1-00614001T004_A6a-h** and compliant with the §15.215 (c) requirement.

802.11n HT40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	39.8	55.5*	55.8*	39.8	39.9	50.6	44.2	80.0	80.0
Port 2	39.6	51.9*	54.3*	39.4	39.6	52.7	39.6	79.5	80.0

802.11ac HT40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	39.8	50.0	56.8*	39.9	39.9	55.0	46.0	80.0	80.0
Port 2	39.3	52.7	46.6*	39.5	39.4	46.3	39.8	80.0	80.0

802.11ax HE40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	40.1	54.2	54.6*	40.2	40.2	53.1	44.2	79.9	80.0
Port 2	39.9	54.3	40.8*	39.9	40.1	41.0	40.1	78.6	79.7

Where the 26dB emission bandwidth extends the band 5150MHz to 5250 MHz (channel 48) the 99% bandwidth was used in lieu of the 26dB bandwidth (see KDB 789033 D02 B.2.a) (i)).

Where the 26dB emission bandwidth does extend the 5725 – 5850 MHz band the 20dB bandwidth was measured to show compliance with §15.215(c). The 20dB bandwidth is reported in **23-1-00614001T004_A6a-h** and compliant with the §15.215 (c) requirement.

802.11ac VHT80 26 dB bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	81.4	81.4*	81.8	117.1	82.6	140.3
Port 2	80.8	81.0*	81.3	104.3	81.6	128.3

802.11ax HE80 26 dB bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	81.3	81.1*	81.4	81.9	81.9	120.8
Port 2	81.4	80.8*	81.1	86.7	81.1	108.6

*Where the 26dB emission bandwidth extends the band 5150MHz to 5250 MHz (channel 48) the 99% bandwidth was used in lieu of the 26dB bandwidth (see KDB 789033 D02 B.2.a) (i)).

Where the 26dB emission bandwidth does extend the 5725 – 5850 MHz band the 20dB bandwidth was measured to show compliance with §15.215(c). The 20dB bandwidth is reported in **23-1-00614001T004_A6a-h** and compliant with the §15.215 (c) requirement.

12.8 Occupied bandwidth / 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
External result file(s)	23-1-00614001T004_A6a-h.pdf FCC Part 15.407 & ISED Bandwidths
Test setup:	See sub clause 7.5 – A
Measurement uncertainty:	See chapter 9

Usage:

-/-	ISED
OBW is necessary for Emission Designator	

Results:

802.11a 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	17.0	17.2	17.2	17.3	17.2	17.0	17.0	17.2	17.2	20.1	22.3	24.2
Port 2	16.9	21.6	17.1	17.1	17.1	16.9	16.9	17.1	17.1	19.9	23.7	23.9

802.11n HT20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	18.1	18.3	18.3	18.3	18.3	18.1	18.2	18.3	18.3	21.5	24.0	25.4
Port 2	17.8	18.0	18.1	18.0	18.0	17.8	17.9	18.1	18.0	22.5	25.5	25.4

802.11ac VHT20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	18.1	18.3	18.4	18.4	18.3	18.1	18.1	18.3	18.3	22.8	22.8	25.2
Port 2	17.8	18.1	18.1	18.0	18.1	17.8	17.9	18.1	18.0	22.9	25.1	24.8

802.11ax HE20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	144	149	157	165
Port 1	19.2	19.3	19.2	19.2	19.2	19.2	19.2	19.2	19.2	20.6	23.6	24.6
Port 2	19.1	19.2	19.2	19.2	19.2	19.1	19.2	19.2	19.2	21.6	25.6	25.8

802.11n HT40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	36.3	36.7	36.7	36.4	36.4	36.7	36.7	53.7	54.2
Port 2	36.2	36.6	36.4	36.2	36.3	36.4	36.4	42.2	50.2

802.11ac VHT40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	36.4	36.7	36.8	36.4	36.4	36.7	36.6	52.8	53.3
Port 2	36.1	36.4	36.4	36.2	36.2	36.4	36.4	42.1	50.1

802.11ax HE40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	37.6	37.8	37.8	37.6	37.6	37.8	37.6	46.5	45.8
Port 2	37.6	37.8	37.7	37.6	37.7	37.8	37.6	41.5	47.4

802.11ac VHT80 99% bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	75.7	75.5	75.5	75.9	76.1	76.7
Port 2	75.3	75.5	75.5	75.9	75.9	76.5

802.11ax HE80 99% bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	76.9	77.1	77.1	77.1	77.1	77.5
Port 2	76.9	76.9	76.9	77.1	76.9	77.3

12.9 Undesirable emissions for transmitters operating in the 5725 MHz to 5850 MHz band

Description:

Measurement of the spectrum mask as per FCC Part 15.407 (b)(4) and KDB 789033 II.G.2 (c) (ii).
The measurement is repeated at the lowest, middle and highest channel and performed in a conducted way as defined in KDB 789033 II.G.3 (b).

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 x RBW
Span:	See plots!
Trace mode:	Max Hold
Test setup:	See sub clause 7.3 – A
Measurement uncertainty:	See chapter 9

Limits:

FCC Part 15.407 (b)(4)
All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Result:

See plots below

Plots:

802.11 a-mode
Lowest channel (149)
Antenna 0+1
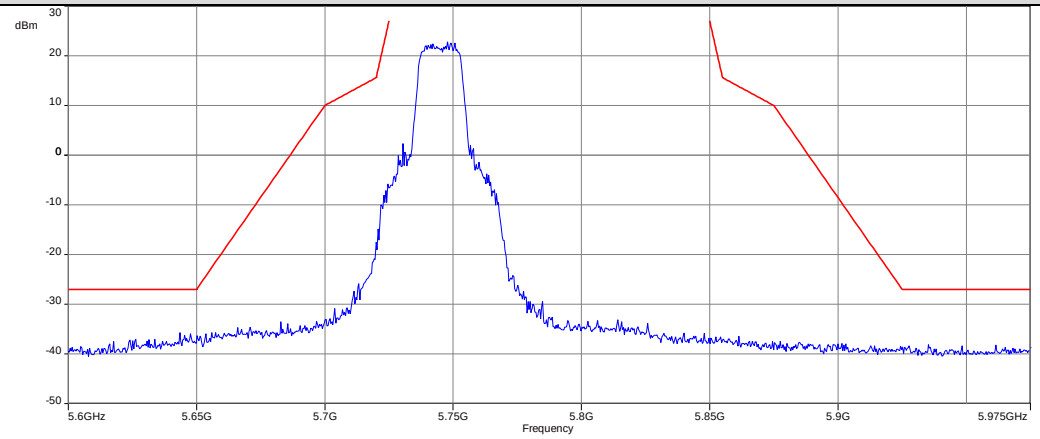
Middle channel (157)
Antenna 0+1
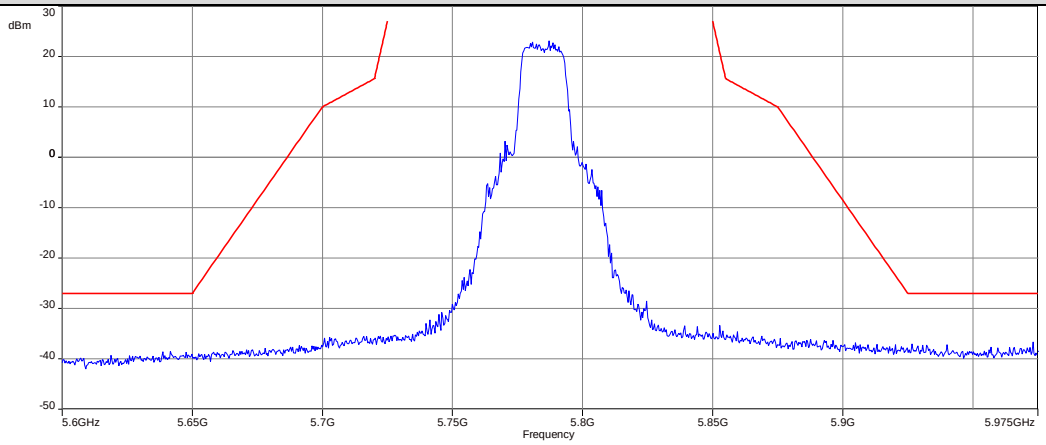
Highest channel (165)
Antenna 0+1
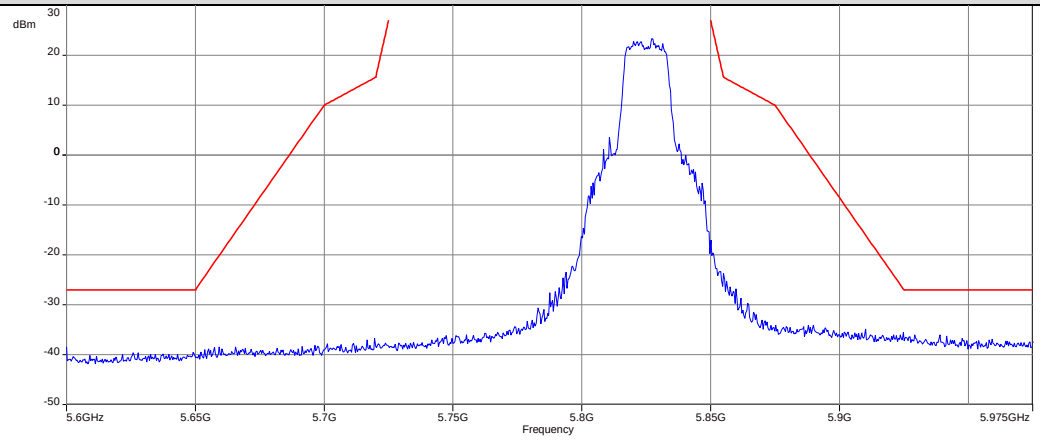

802.11 n HT20-mode
Lowest channel (149)
Antenna 0+1

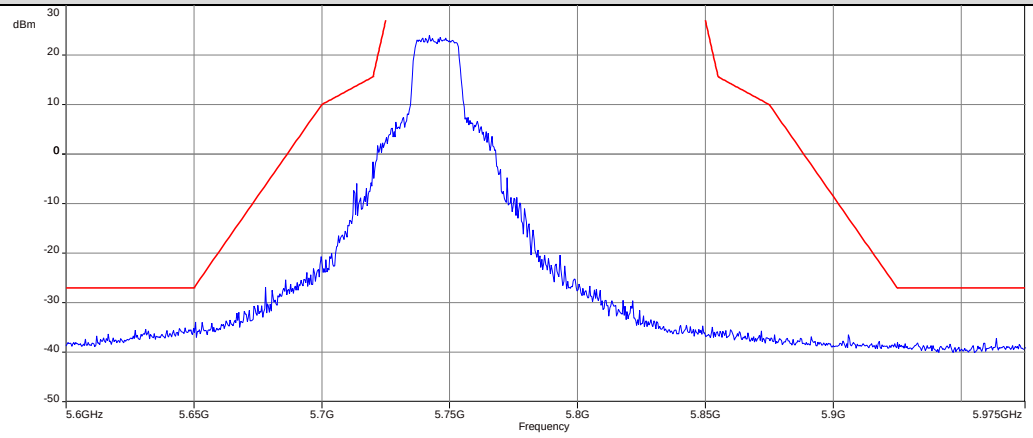

Middle channel (157)
Antenna 0+1

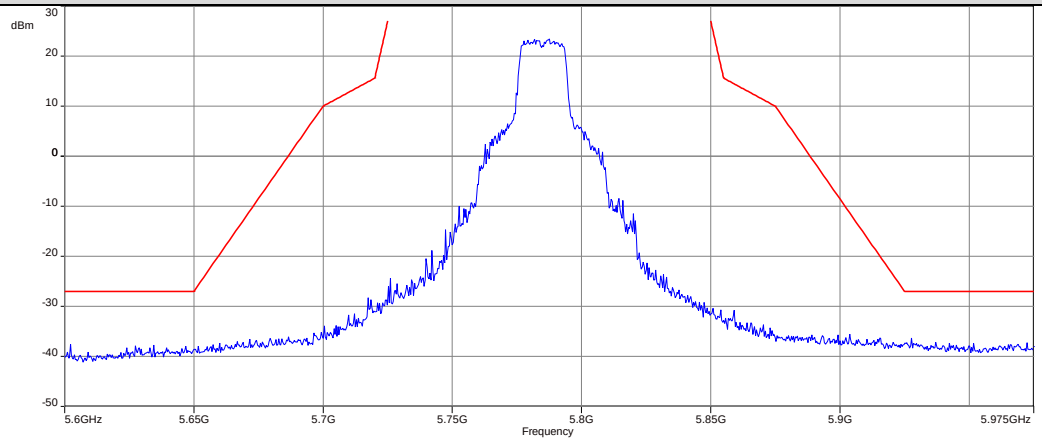

Highest channel (165)
Antenna 0+1

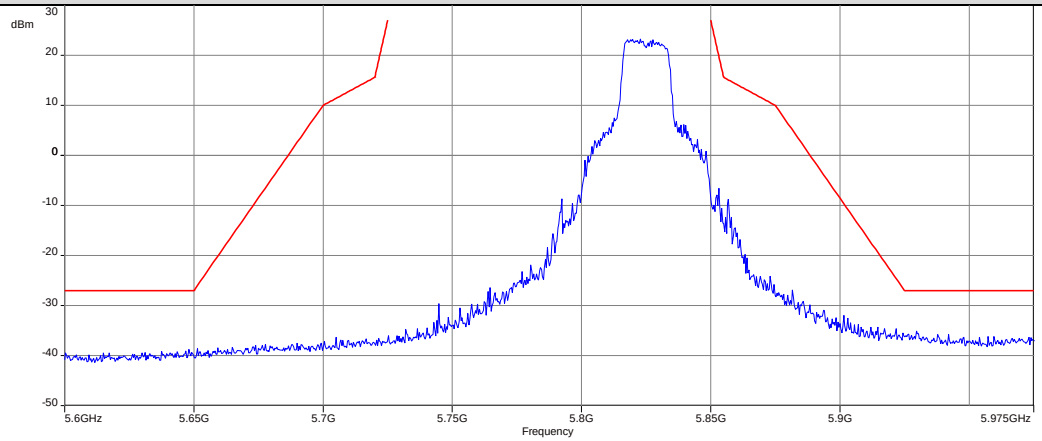

802.11 ac VHT20-mode
Lowest channel (149)
Antenna 0+1

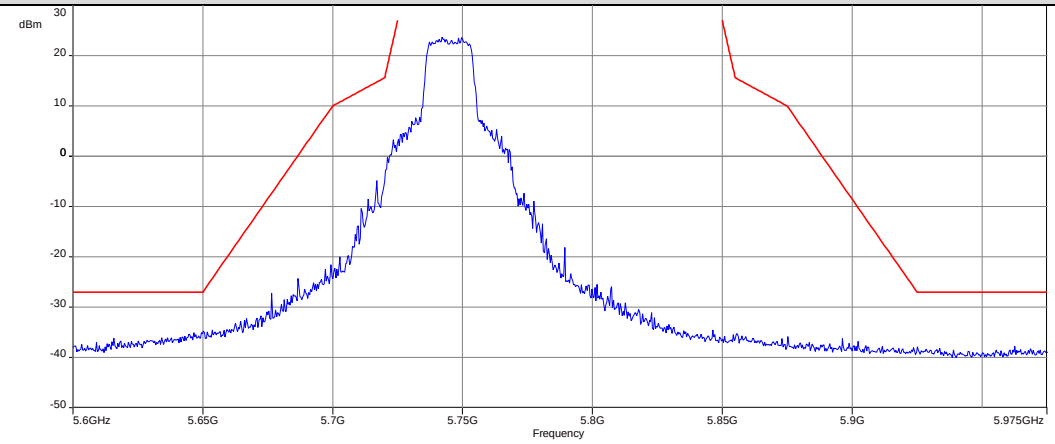

Middle channel (157)
Antenna 0+1

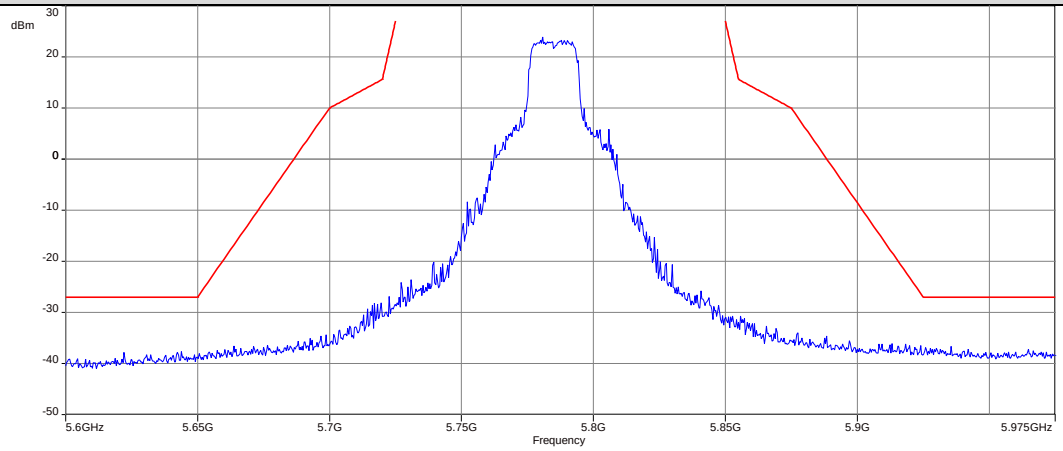

Highest channel (165)
Antenna 0+1

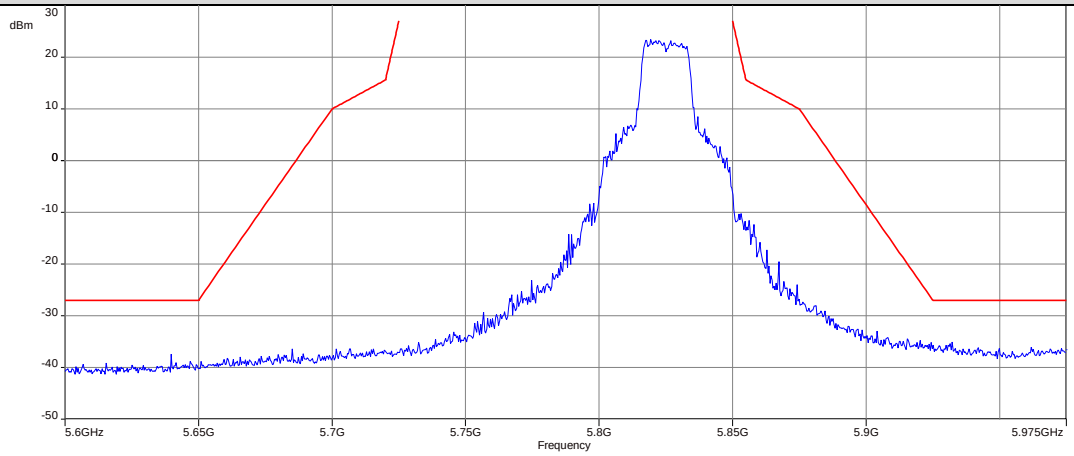

802.11 ax HE20-mode
Lowest channel (149)
Antenna 0+1

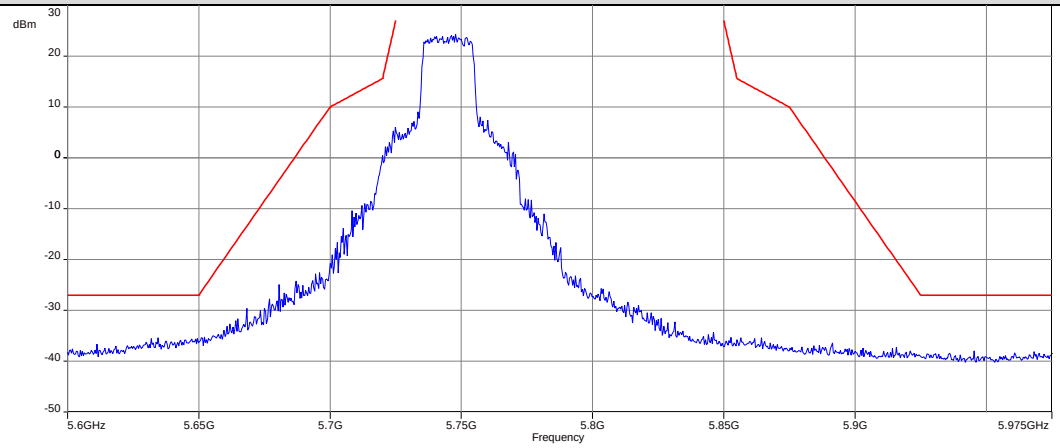

Middle channel (157)
Antenna 0+1

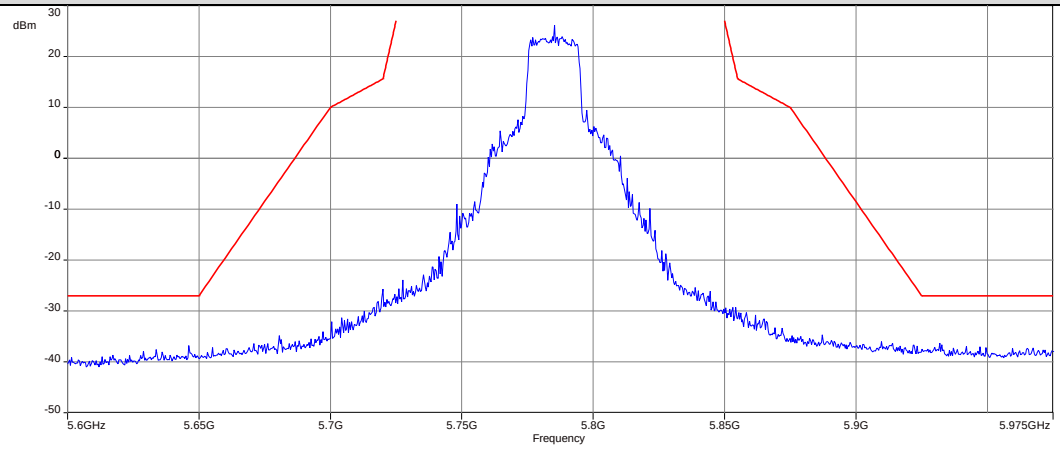

Highest channel (165)
Antenna 0+1

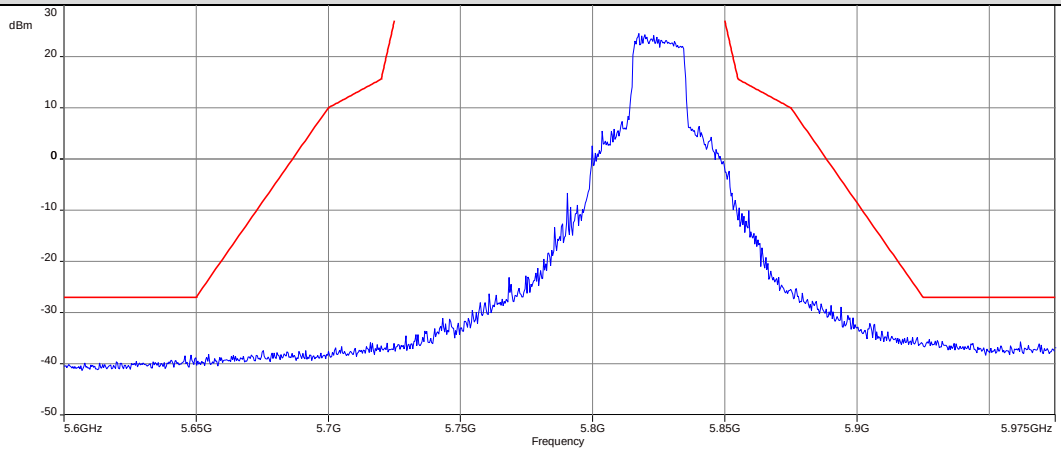

802.11 n HT40-mode
Lowest channel (151)
Antenna 0+1

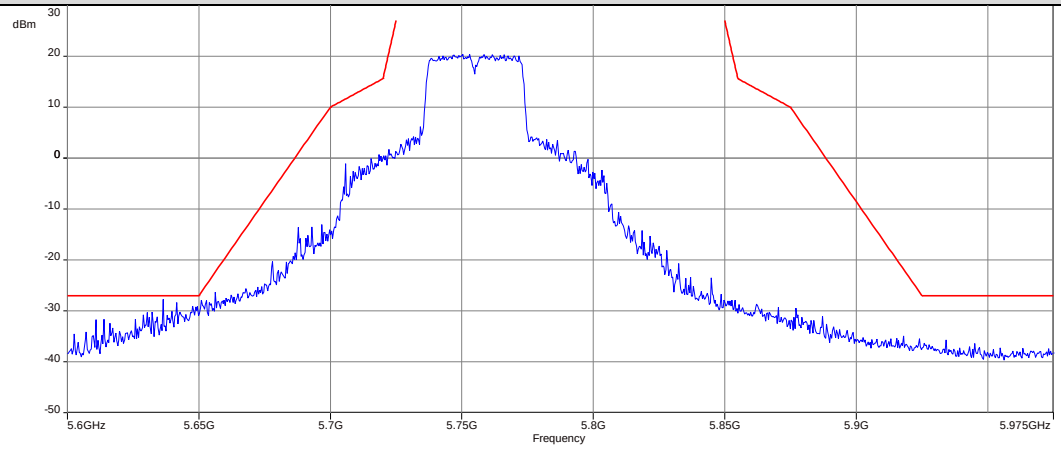

Highest channel (159)
Antenna 0+1

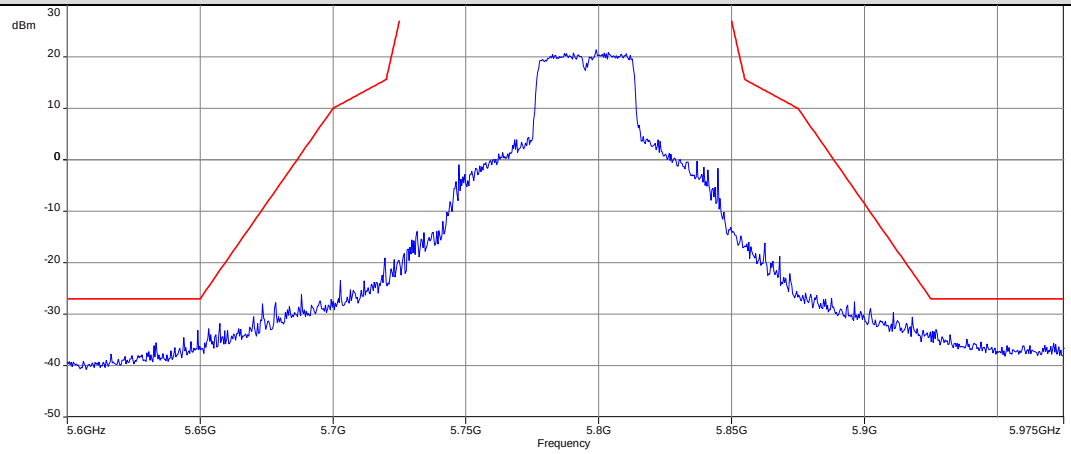

802.11 ac VHT40-mode
Lowest channel (151)
Antenna 0+1

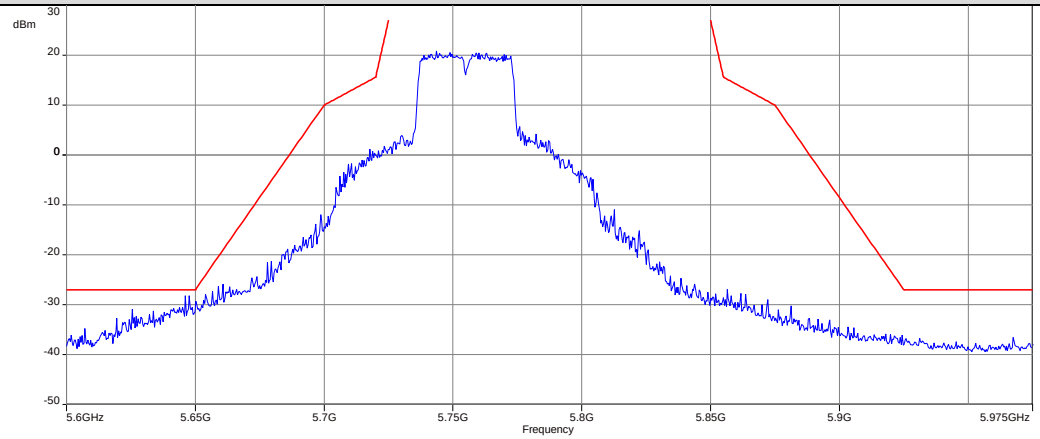

Highest channel (159)
Antenna 0+1

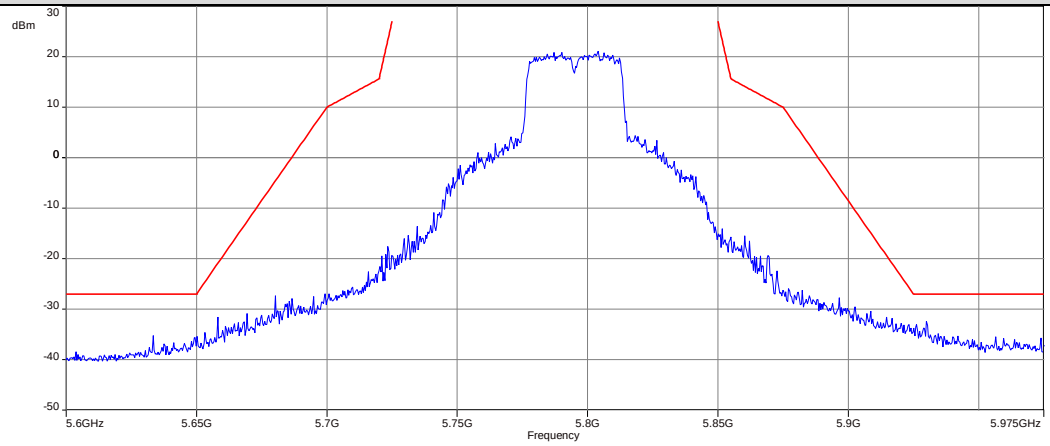

802.11 ax HE40-mode
Lowest channel (151)
Antenna 0+1

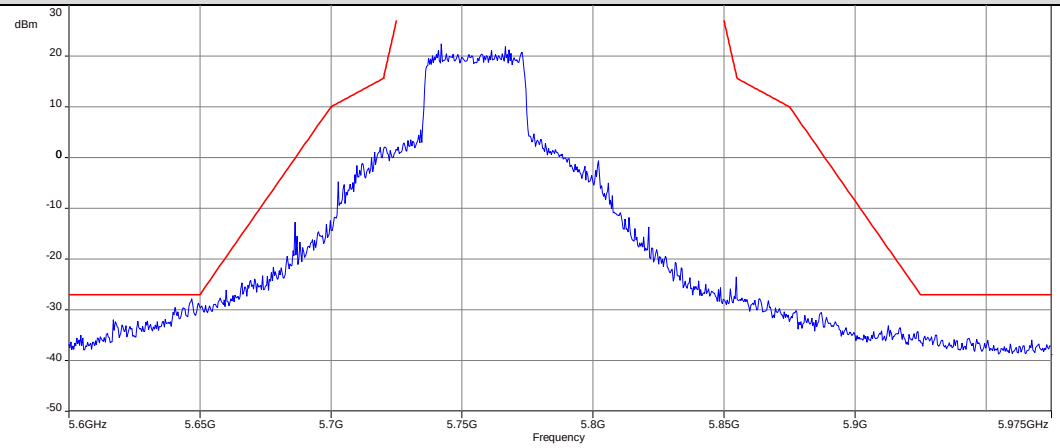

Highest channel (159)
Antenna 0+1

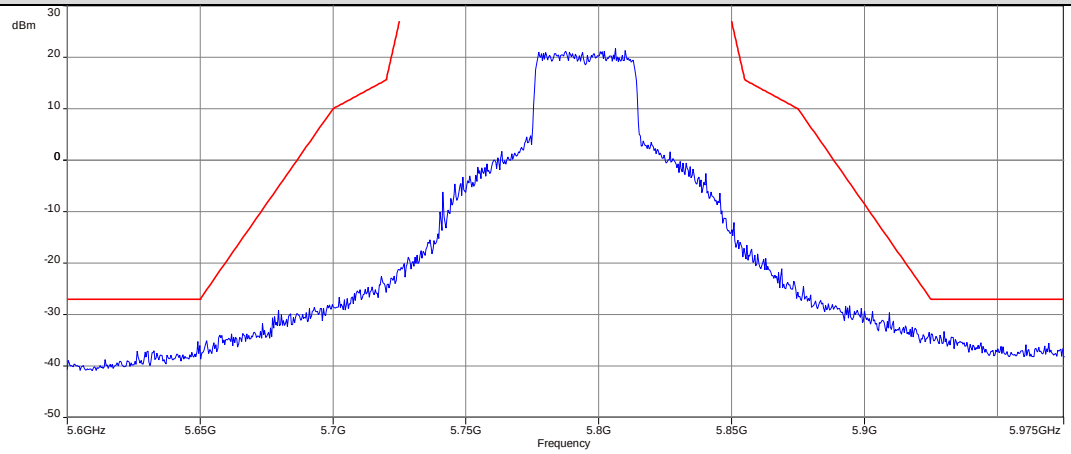

802.11 ac VHT80-mode
Channel (155)
Antenna 0+1

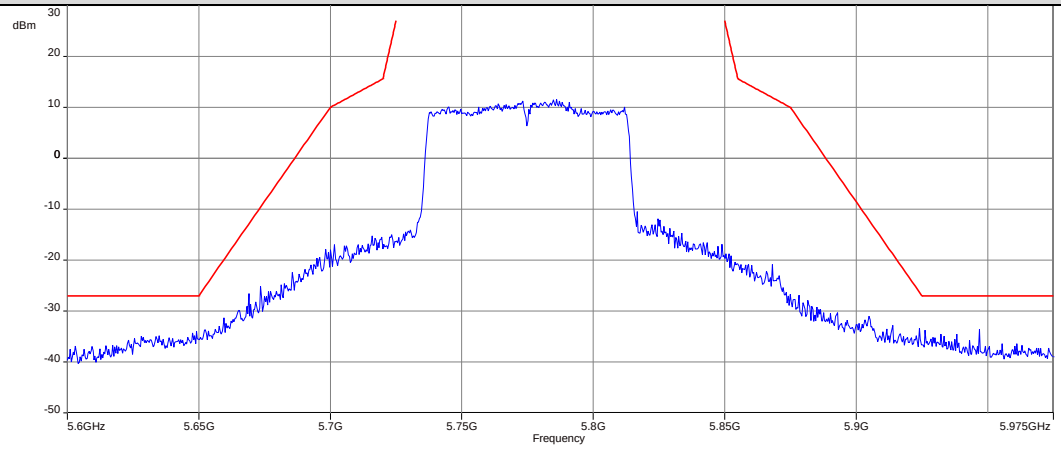

802.11 ax HE80-mode
Lowest channel (155)
Antenna 0+1

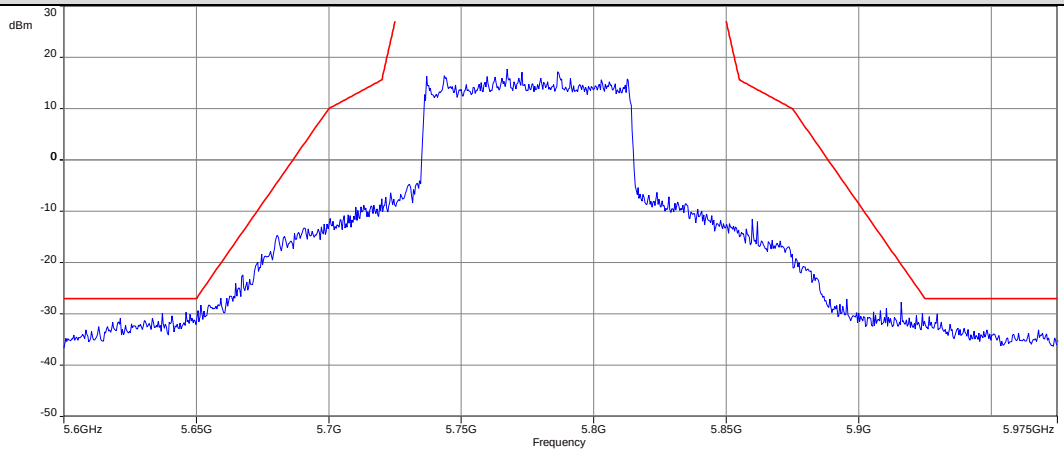

12.10 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 x RBW
Span:	See plots!
Trace mode:	Max Hold
Test setup:	See sub clause 6.2 – A
Measurement uncertainty:	See chapter 9

Limits:

Band Edge Compliance Radiated
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
74 dBµV/m (peak) 54 dBµV/m (average)

Result:

Scenario	Band Edge Compliance Radiated [dBµV/m]
band edge	< 74 dBµV/m (peak) < 54 dBµV/m (average)

Plots:

Plot 1: lower band edge; U-NII-1; lowest channel; a-mode

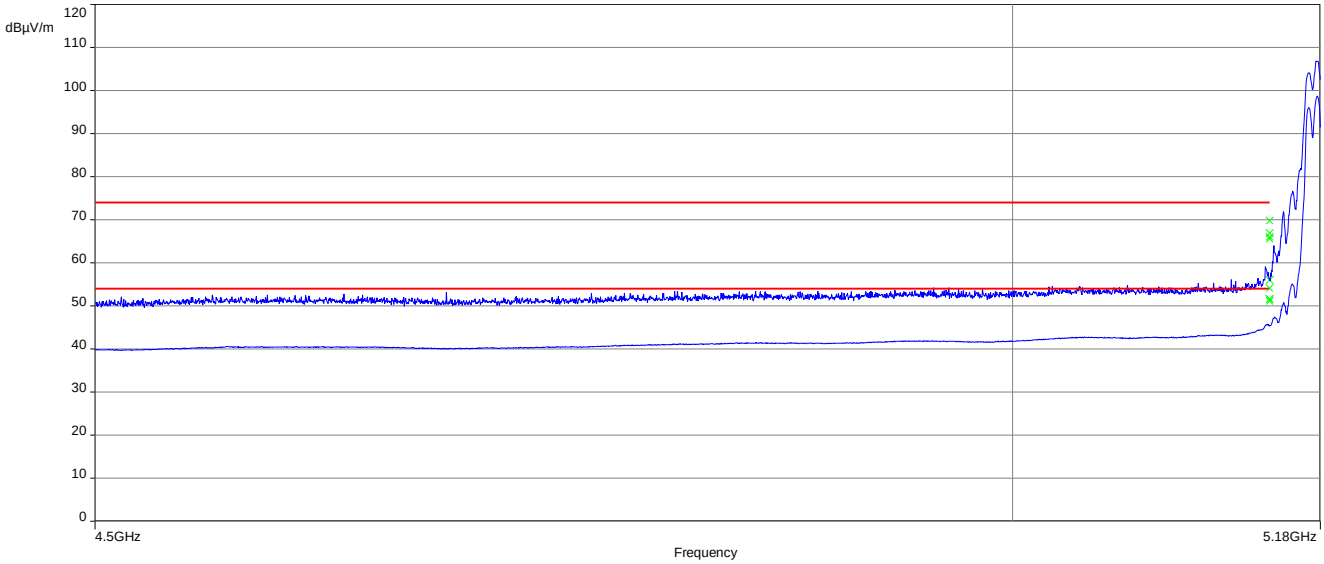

Plot 2: upper band edge; U-NII-2A; highest channel; a-mode

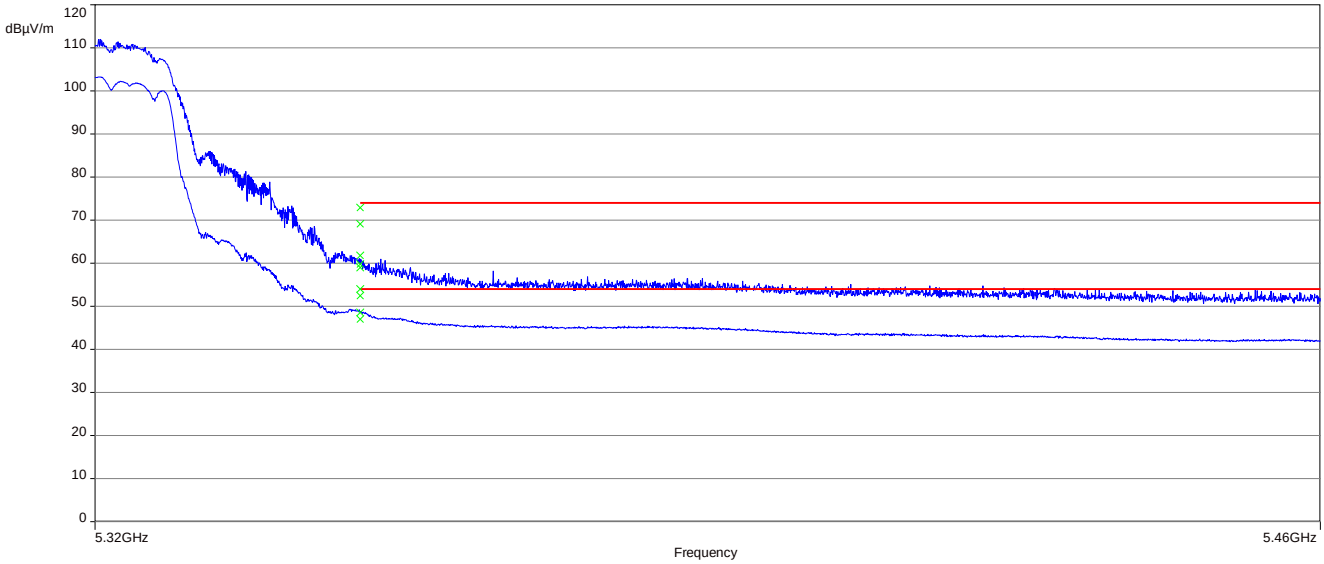

Plot 3: lower band edge; U-NII-2C; lowest channel; a-mode

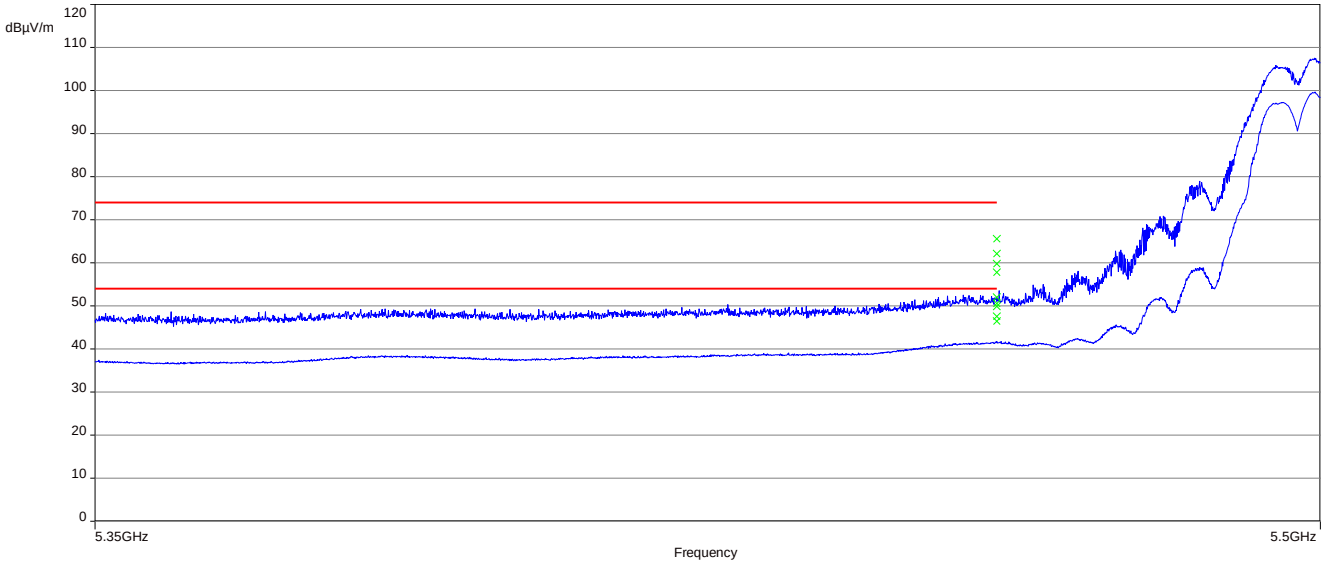

Plot 4: lower band edge; U-NII-1; lowest channel; n20-mode

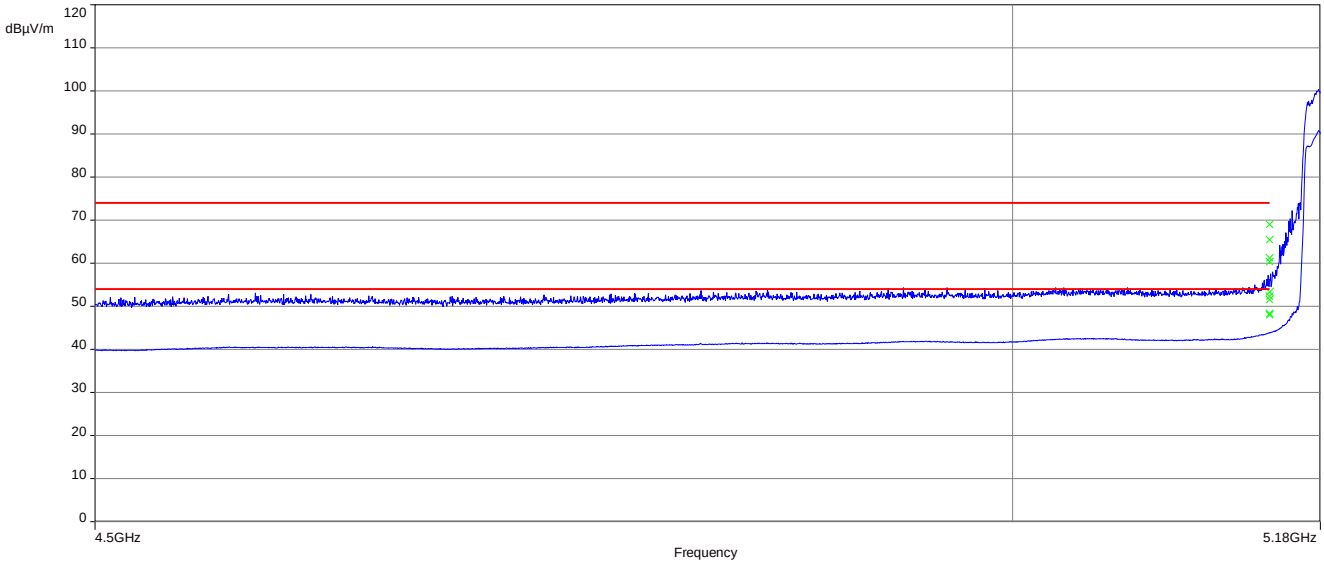

Plot 5: upper band edge; U-NII-2A; highest channel; n20-mode

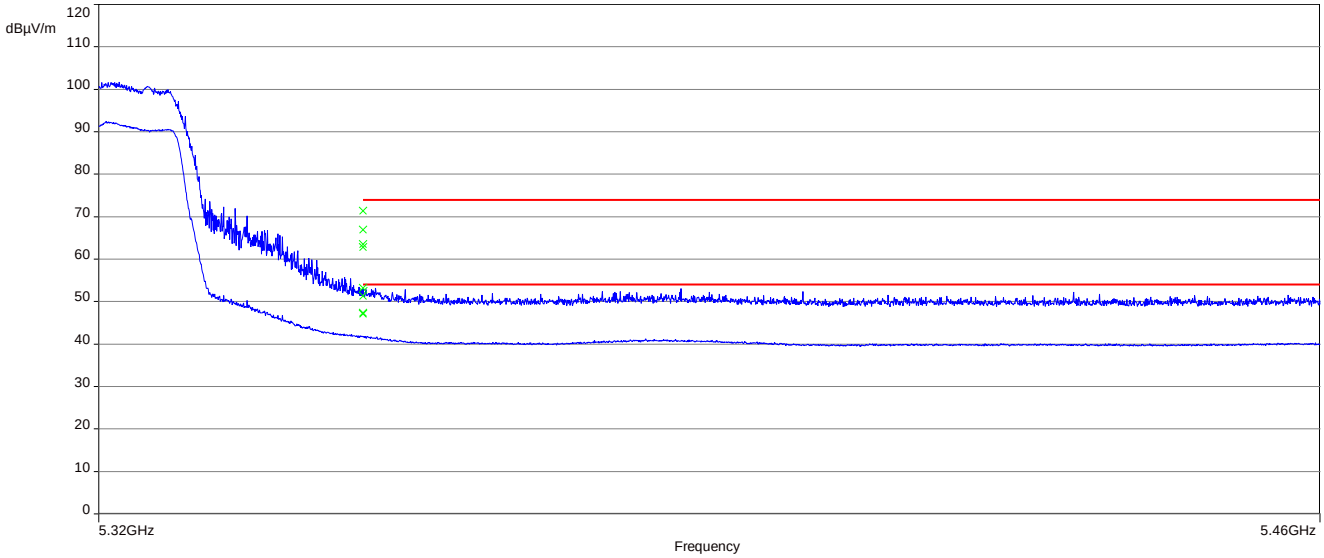

Plot 6: lower band edge; U-NII-2C; lowest channel; n20-mode

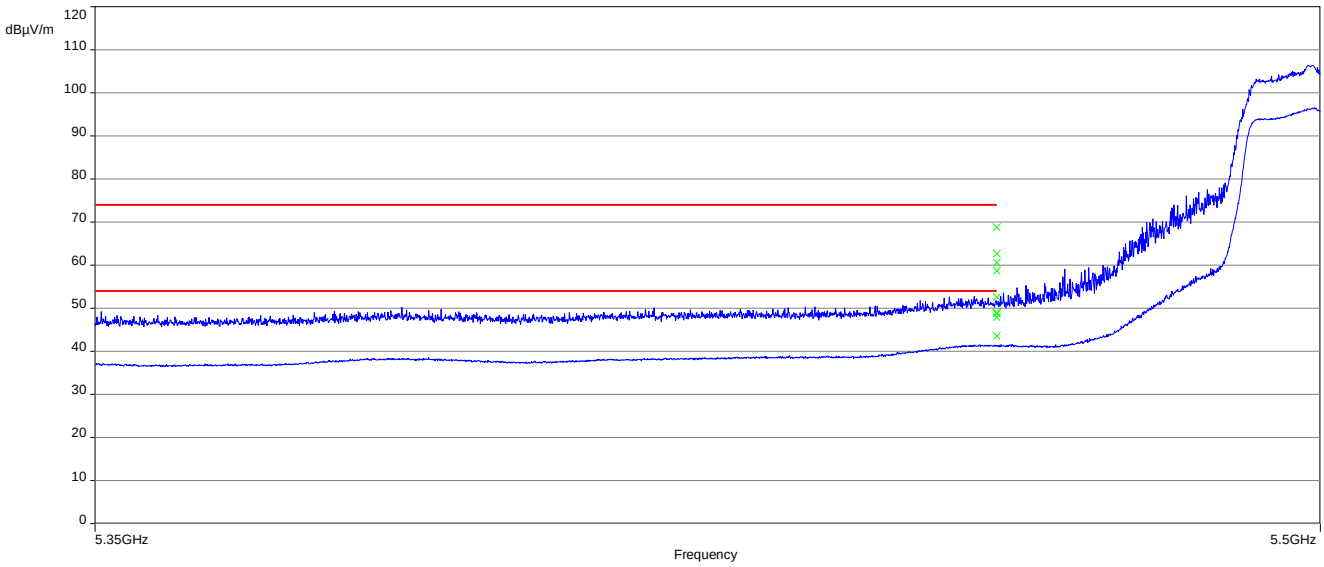

Plot 7: lower band edge; U-NII-1; lowest channel; ac20-mode

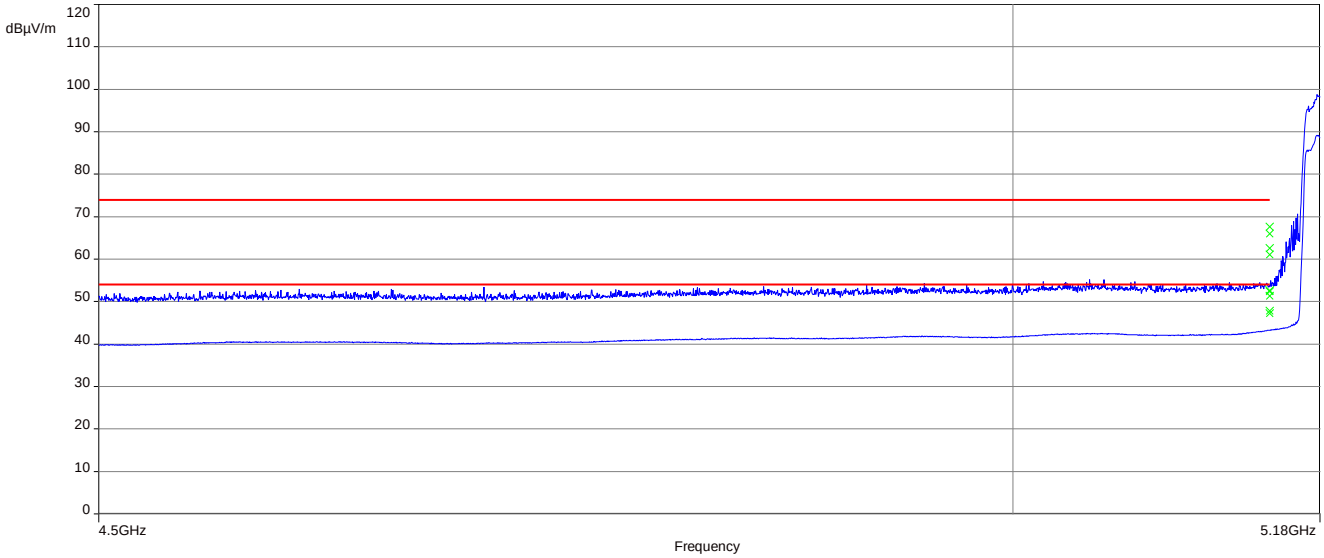

Plot 8: upper band edge; U-NII-2A; highest channel; ac20-mode

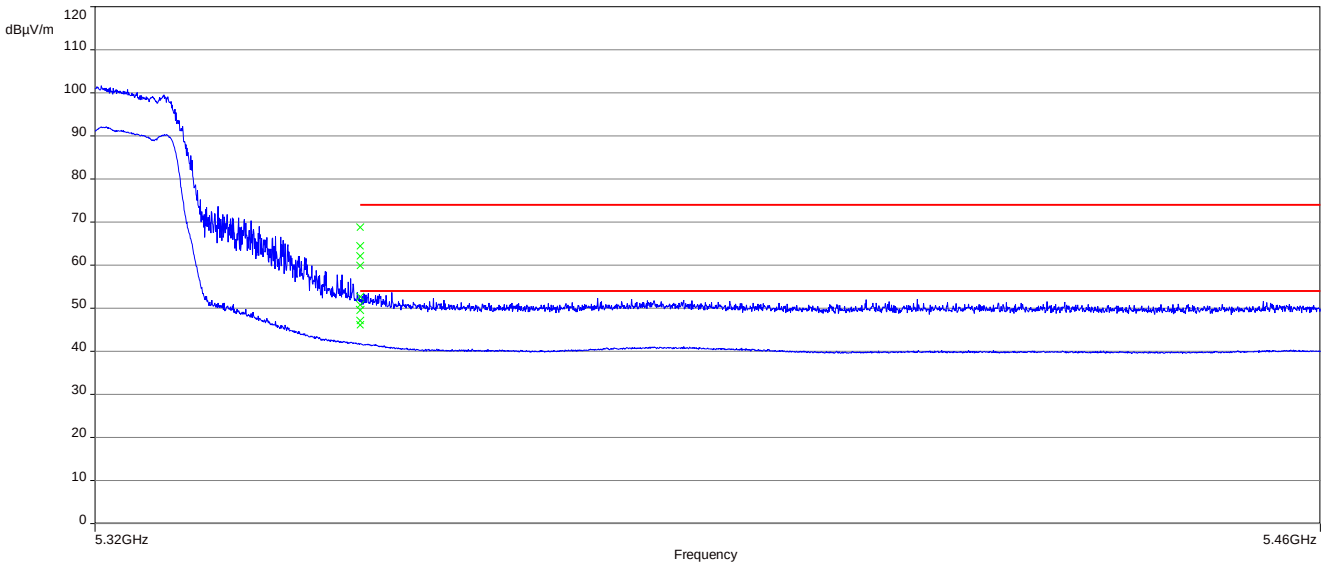

Plot 9: lower band edge; U-NII-2C; lowest channel; ac20-mode

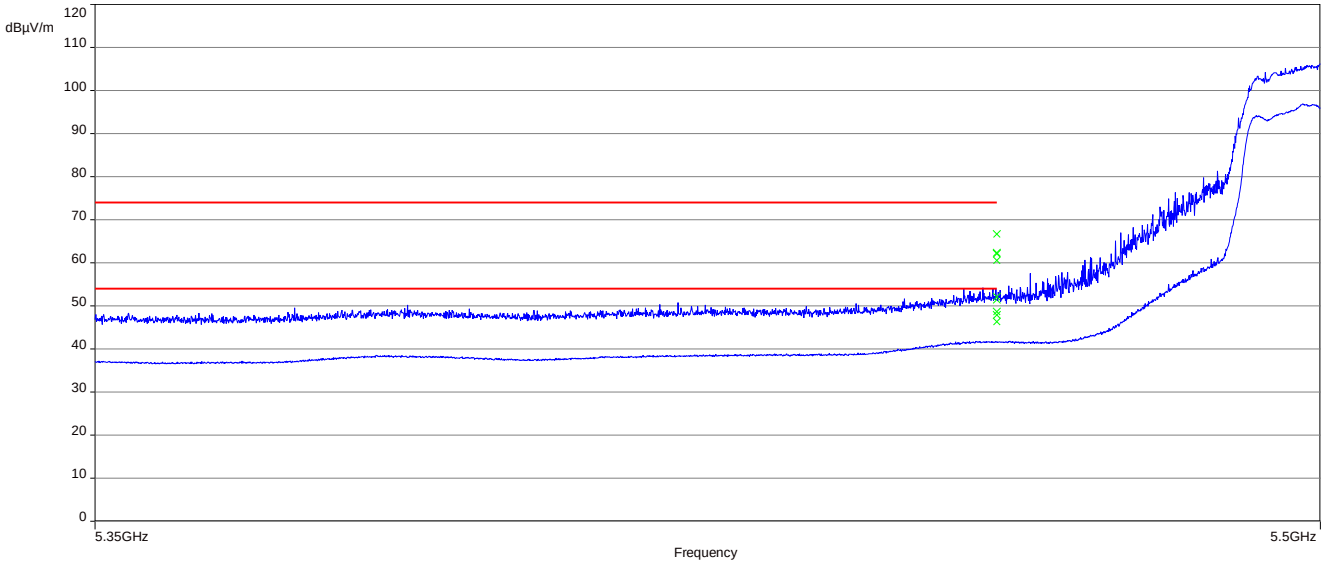

Plot 10: lower band edge; U-NII-1; lowest channel; ax20-mode

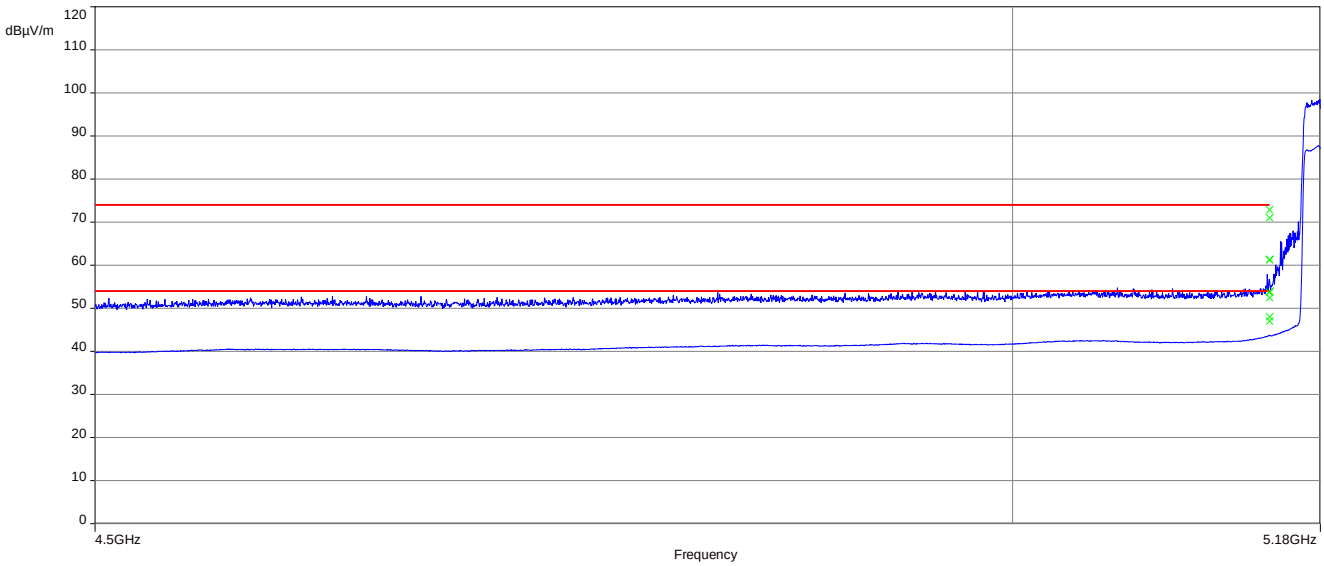

Plot 11: upper band edge; U-NII-2A; highest channel; ax20-mode

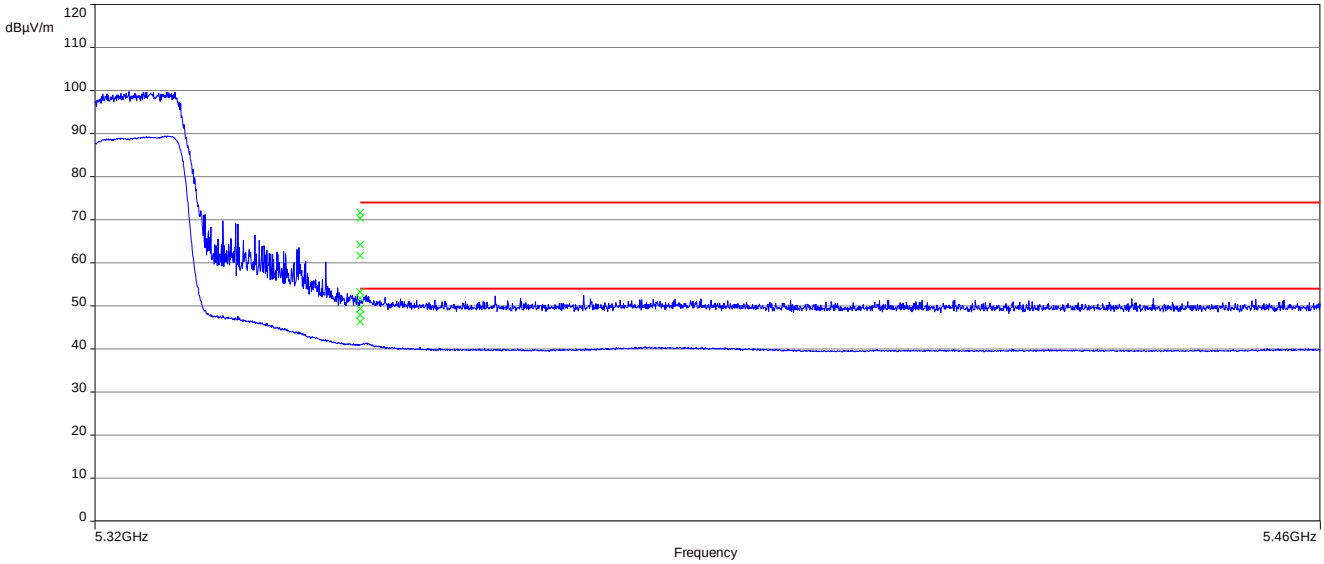

Plot 12: lower band edge; U-NII-2C; lowest channel; ax20-mode

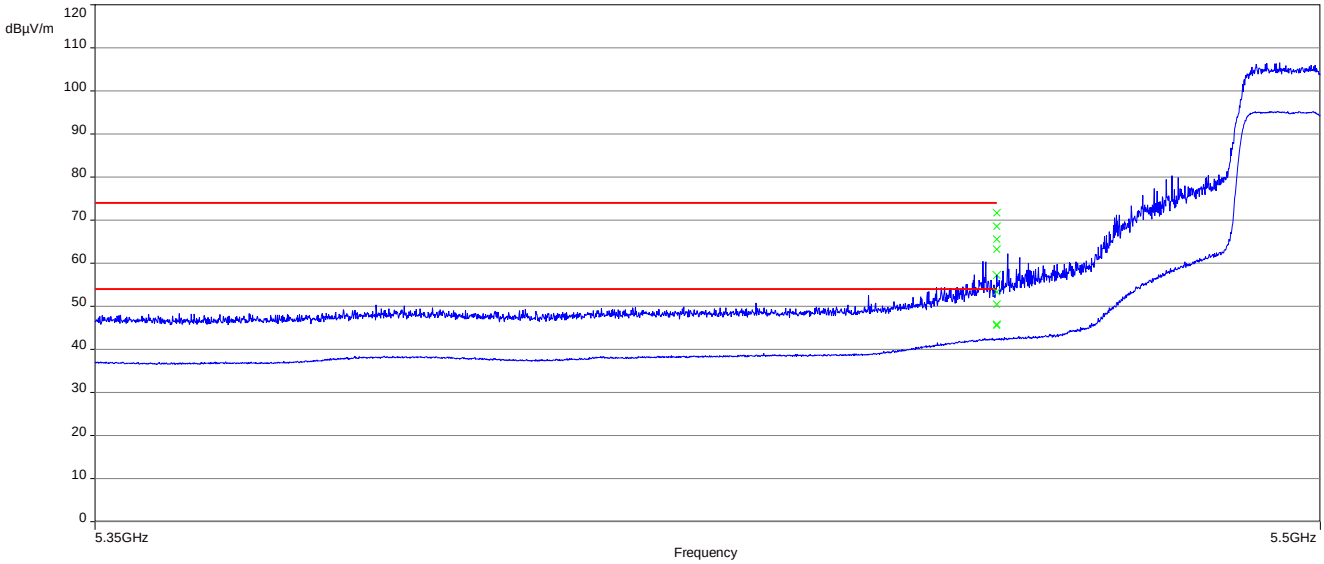

Plot 13: lower band edge; U-NII-1; lowest channel; n40-mode

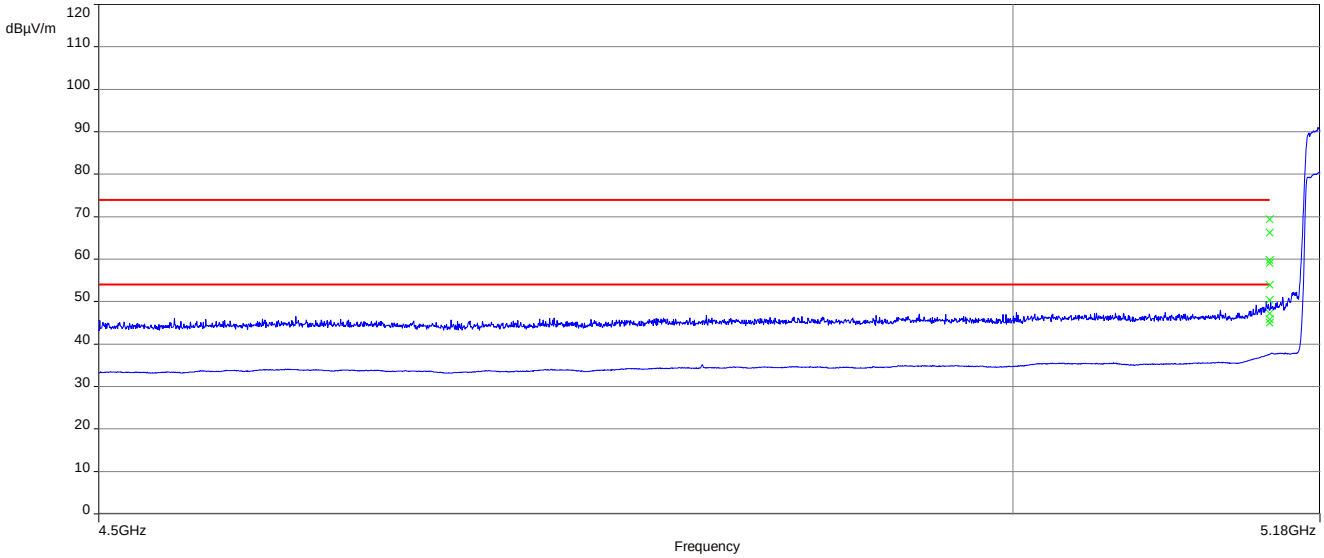

Plot 14: upper band edge; U-NII-2A; highest channel; n40-mode

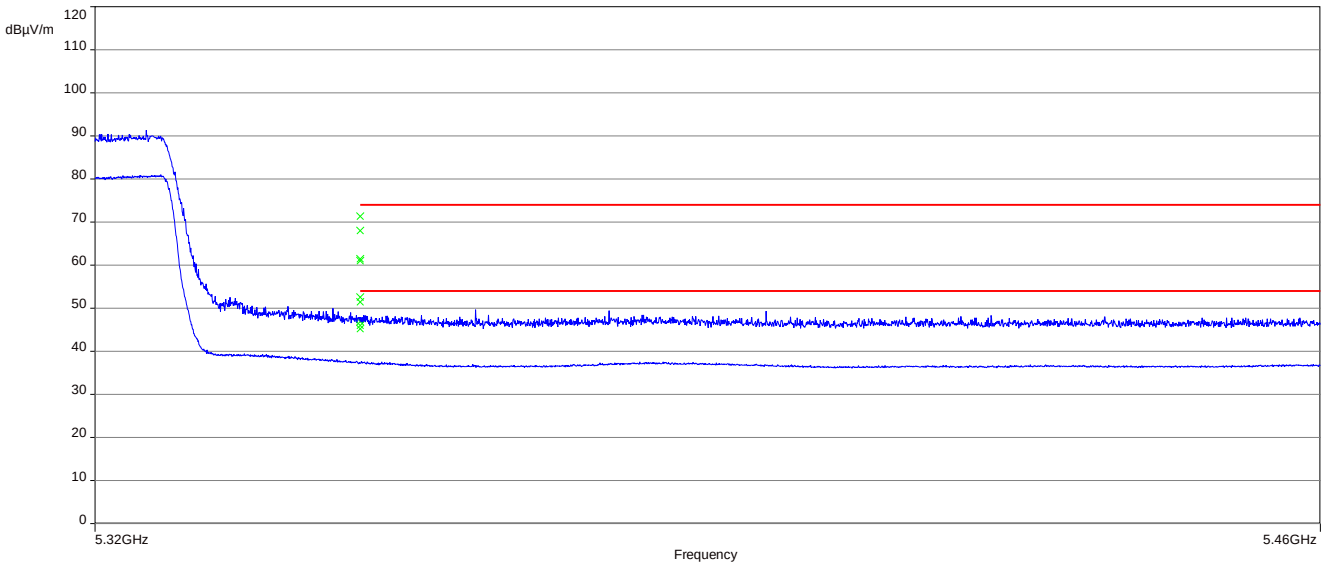

Plot 15: lower band edge; U-NII-2C; lowest channel; n40-mode

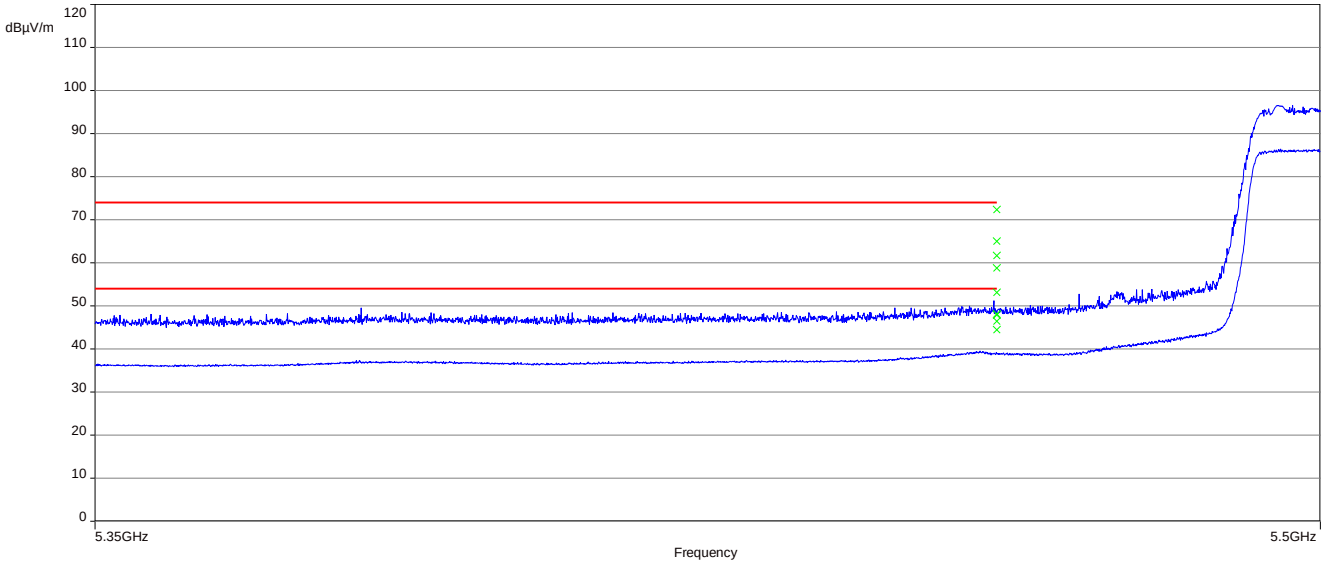

Plot 16: lower band edge; U-NII-1; lowest channel; ac40-mode

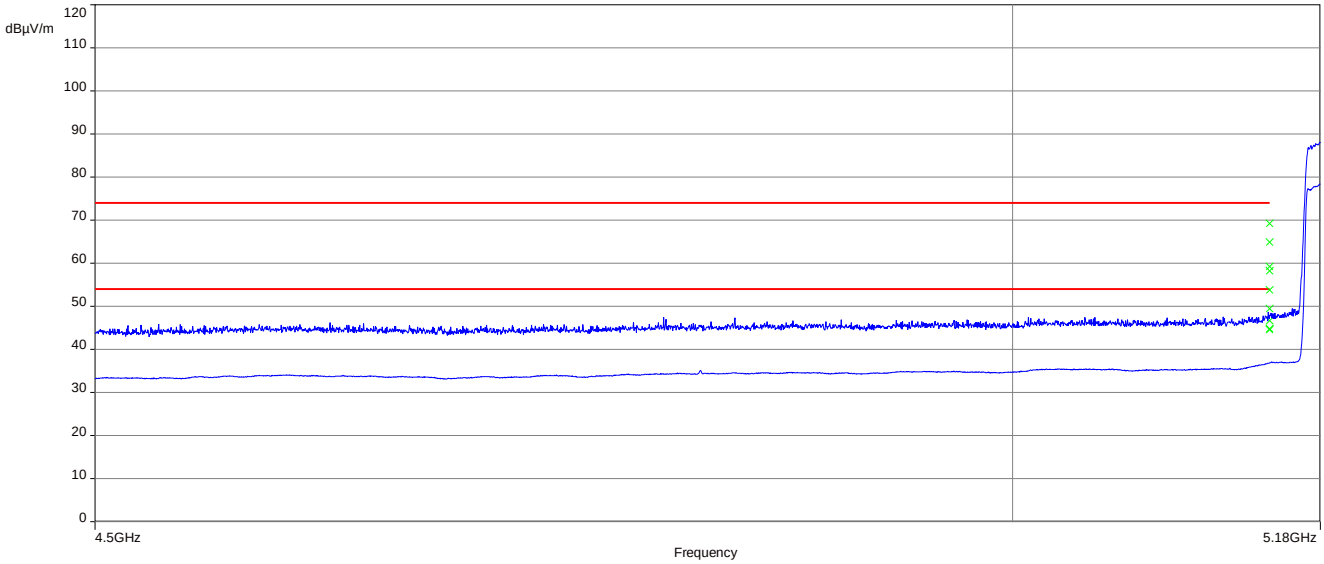

Plot 17: upper band edge; U-NII-2A; highest channel; ac40-mode

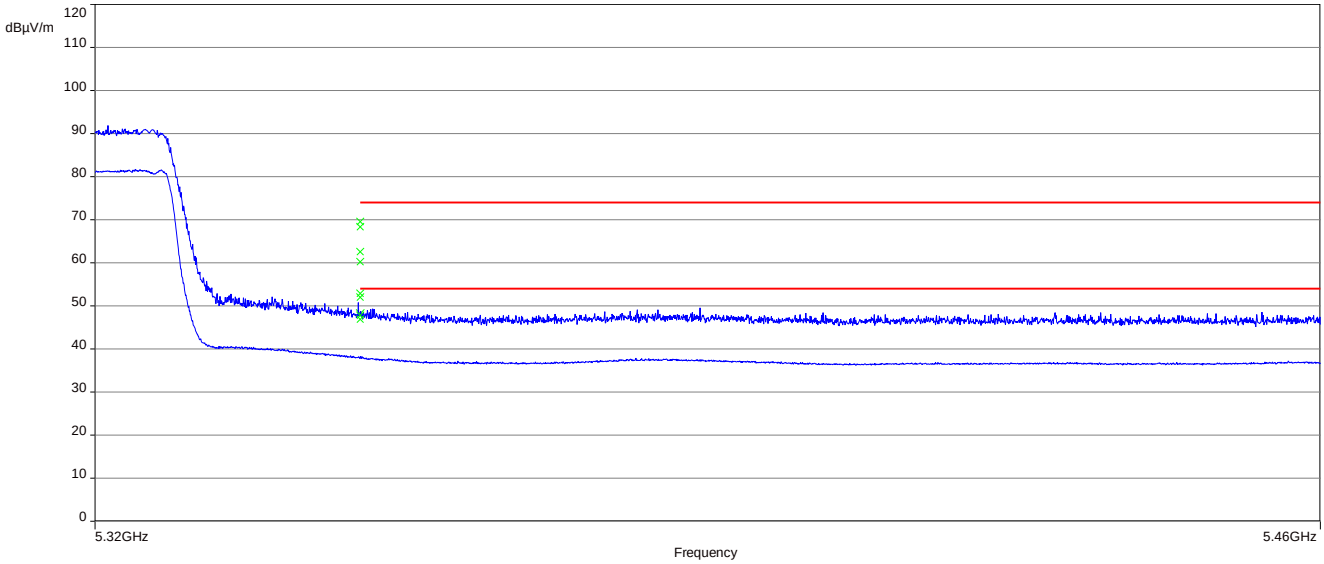

Plot 18: lower band edge; U-NII-2C; lowest channel; ac40-mode

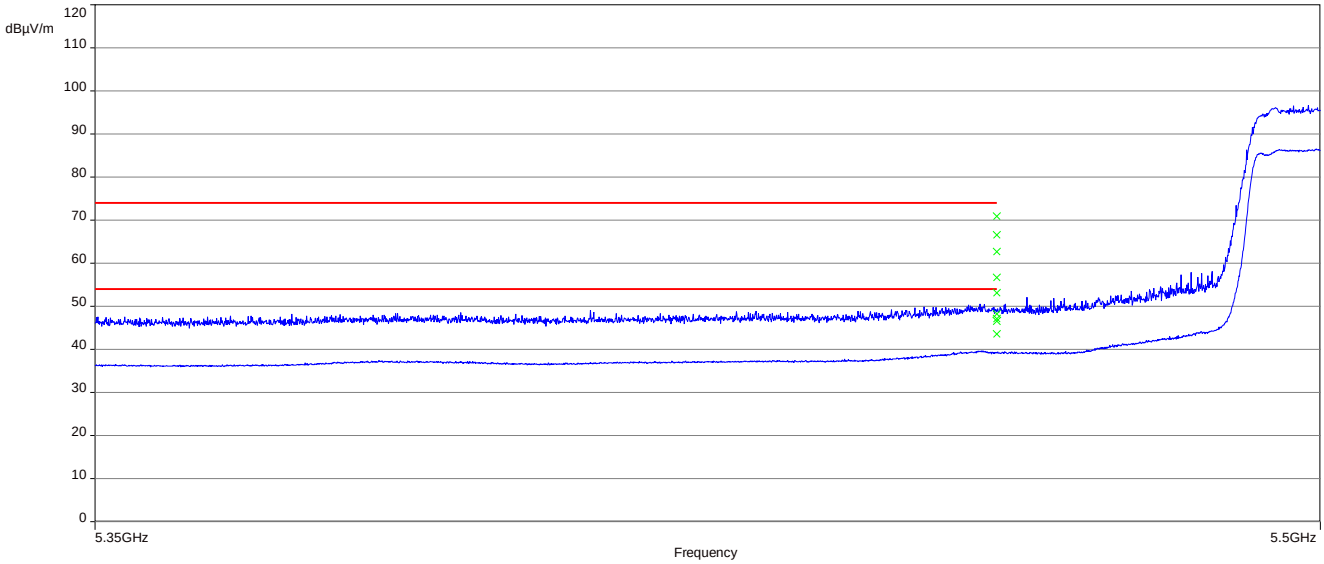

Plot 19: lower band edge; U-NII-1; lowest channel; ax40-mode

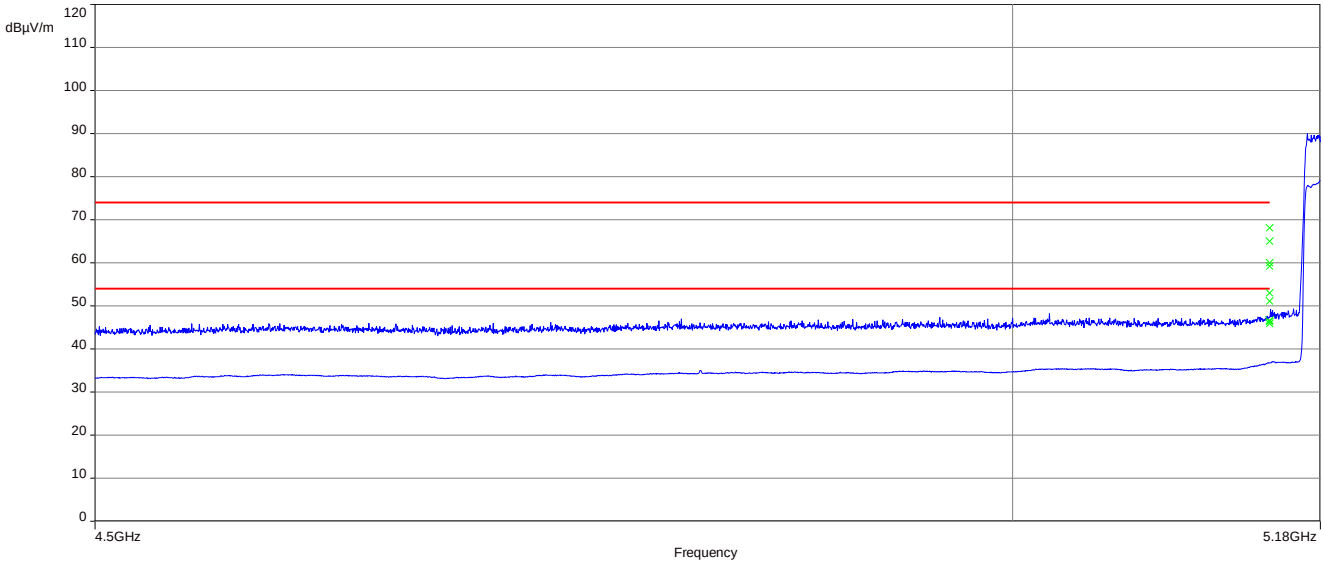

Plot 20: upper band edge; U-NII-2A; highest channel; ax40-mode

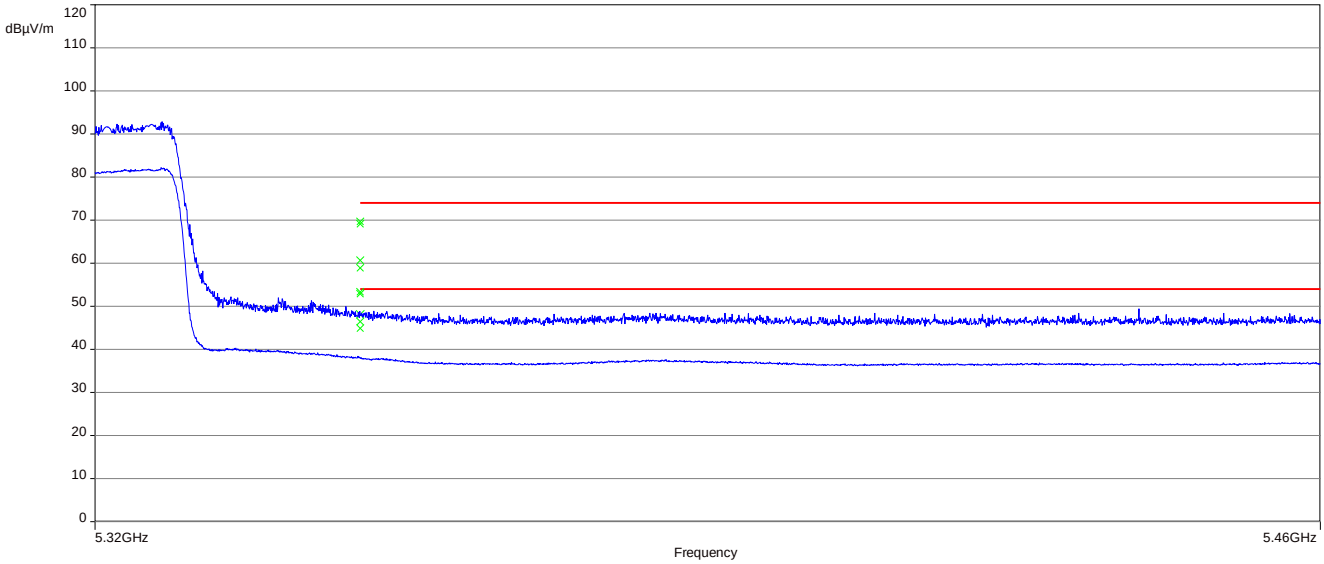

Plot 21: lower band edge; U-NII-2C; lowest channel; ax40-mode

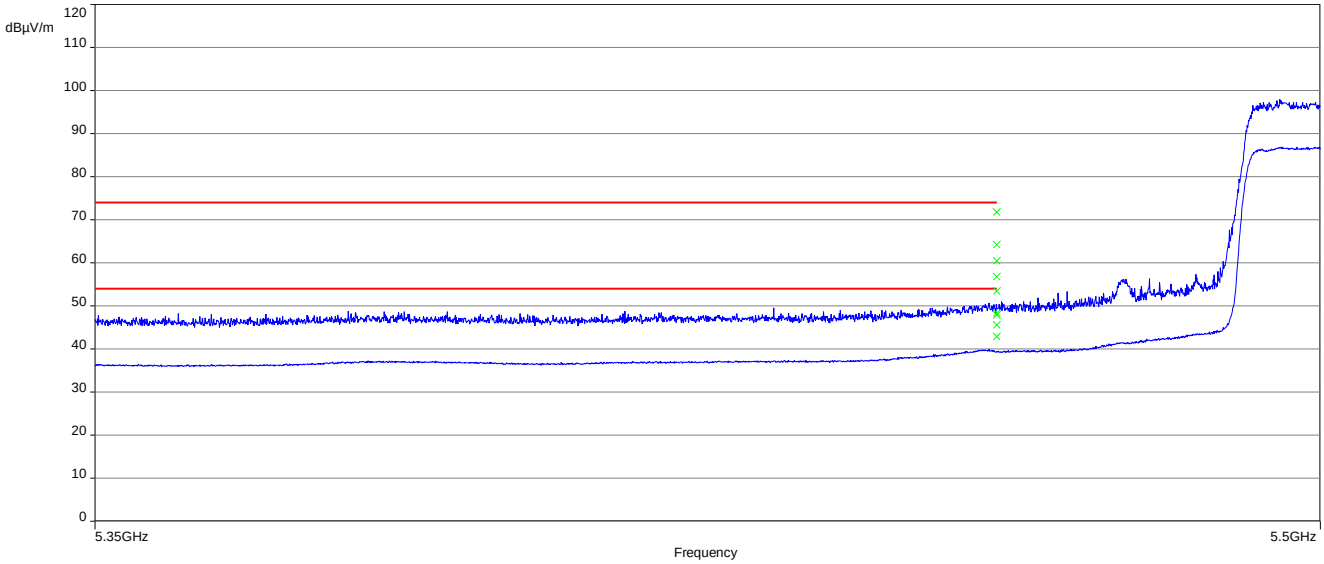

Plot 22: lower band edge; U-NII-1; lowest channel; ac80-mode

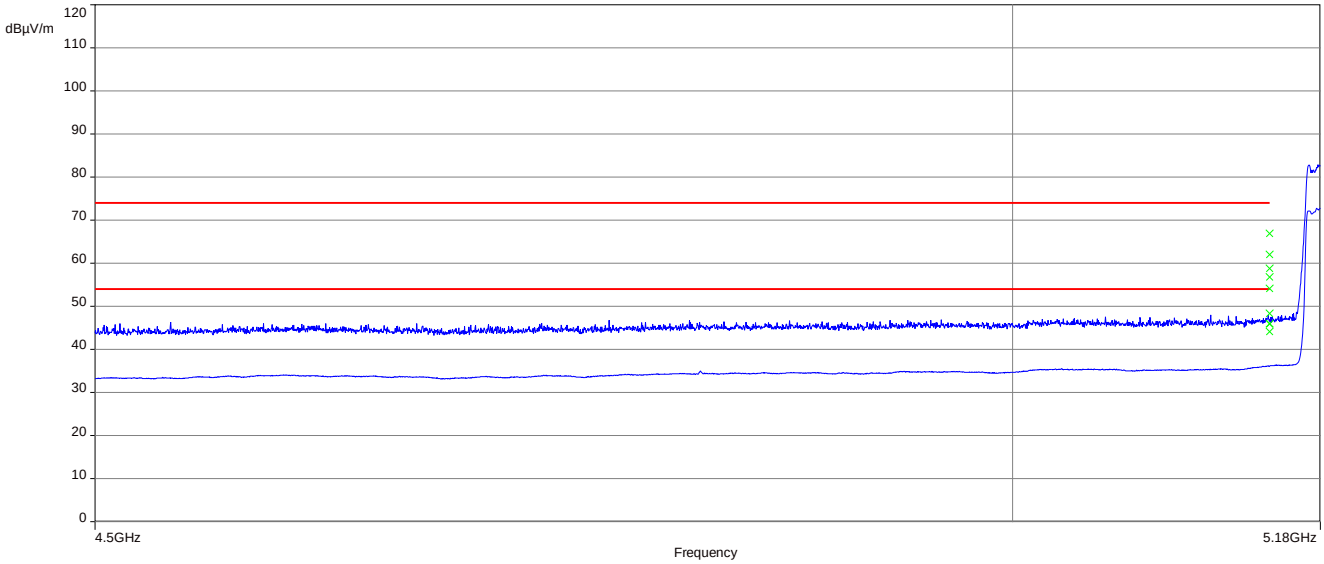

Plot 23: upper band edge; U-NII-2A; highest channel; ac80-mode

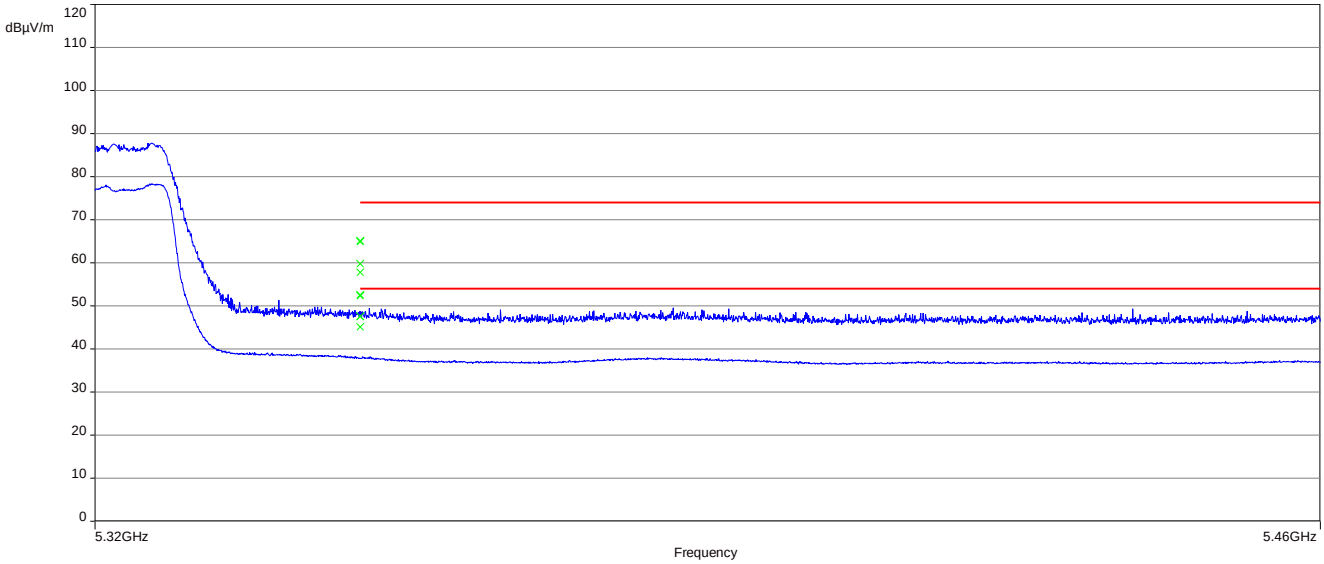

Plot 24: lower band edge; U-NII-2C; lowest channel; ac80-mode

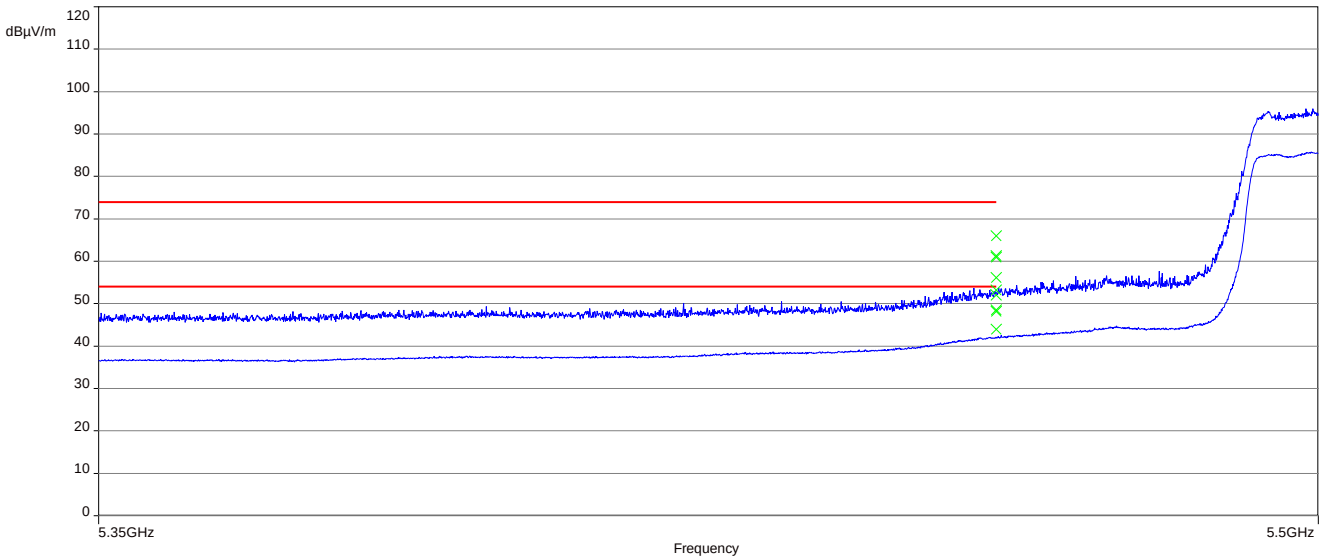

Plot 25: lower band edge; U-NII-1; lowest channel; ax80-mode

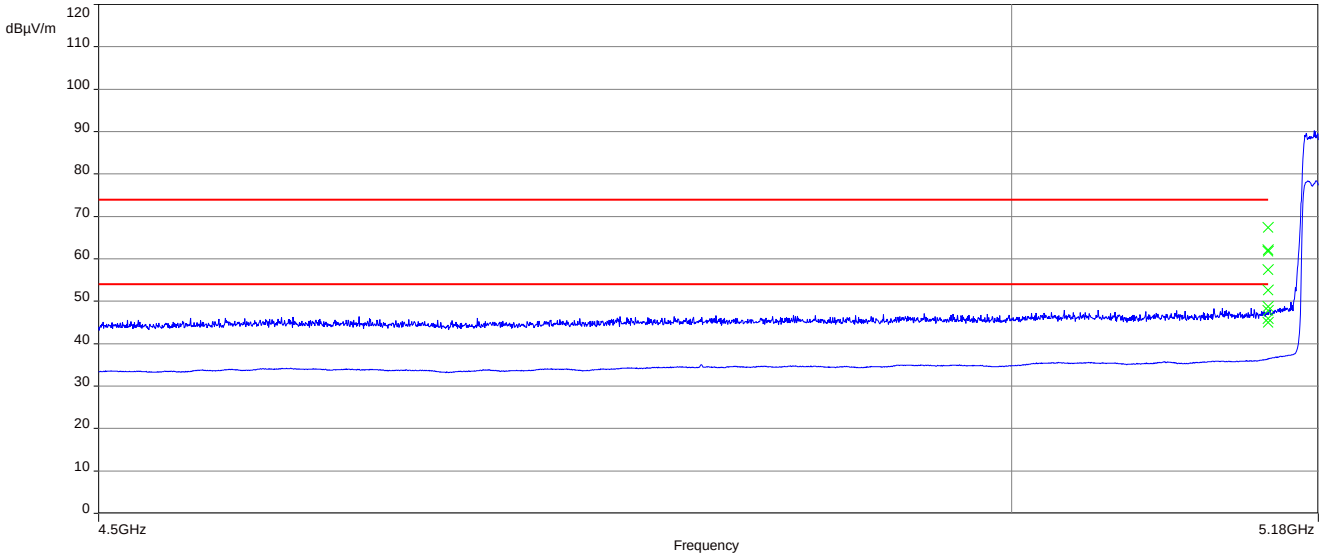

Plot 26: upper band edge; U-NII-2A; highest channel; ax80-mode

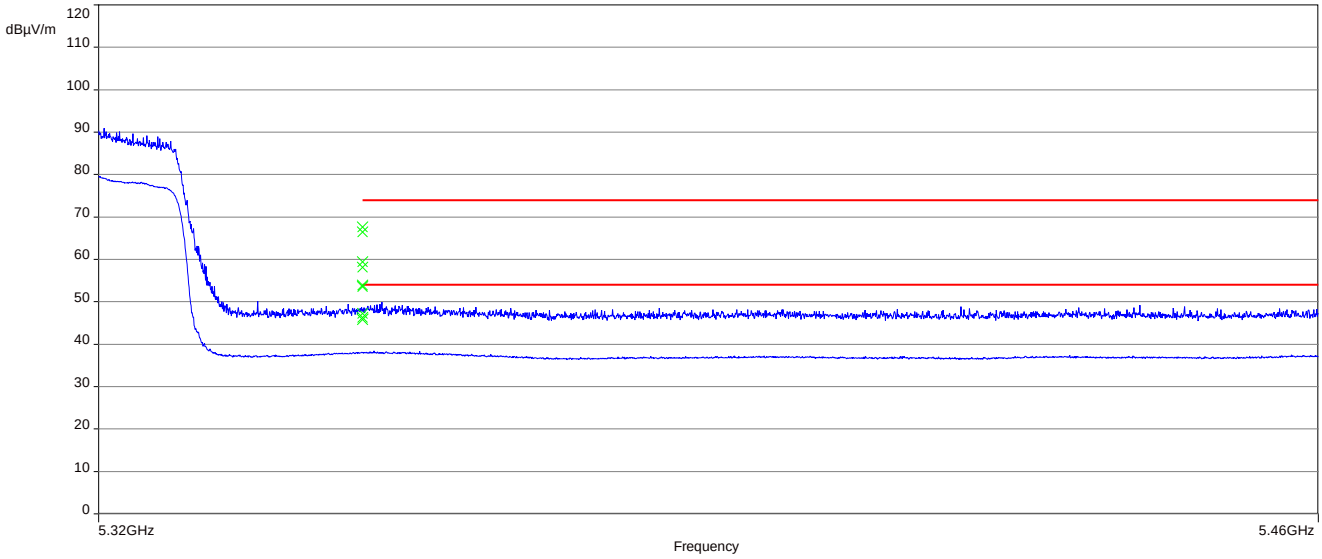

Plot 27: lower band edge; U-NII-2C; lowest channel; ax80-mode

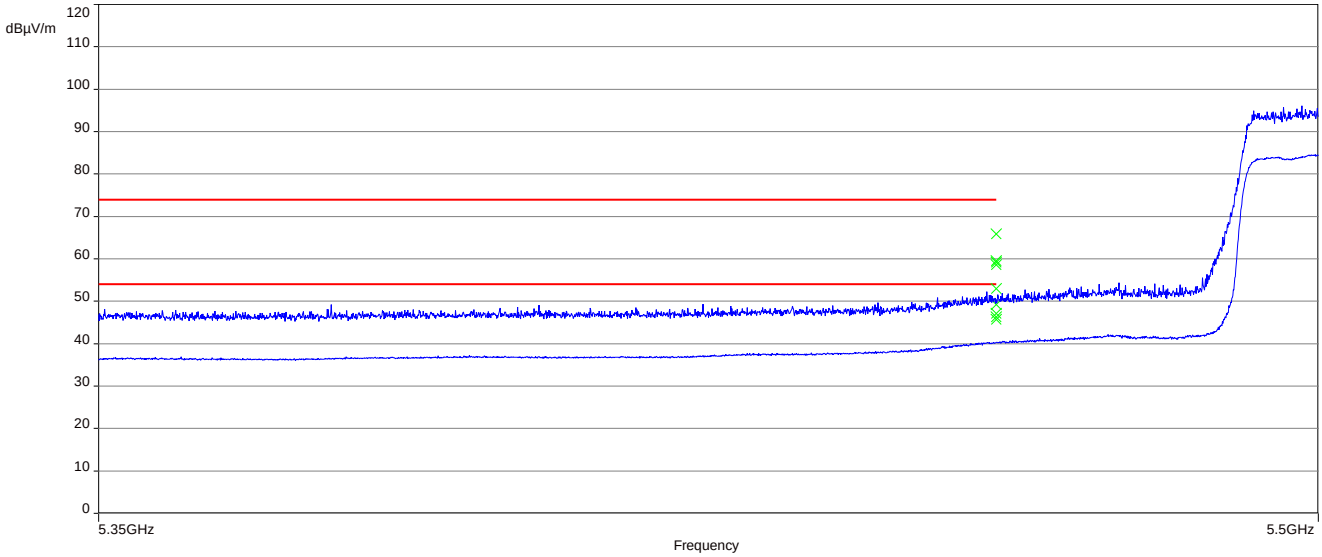

12.11 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are re-calculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace mode:	Max Hold
Test setup:	See sub clause 6.2 – C
Measurement uncertainty:	See chapter 9

Limits:

Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	**Field Strength (dBµV/m)**	**Measurement distance**
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:

Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	**Detector**	**Level [dBµV/m]**
All detected emissions are more than 20 dB below the limit.		

Plots: 20 MHz channel bandwidth

Plot 1: 9 kHz to 30 MHz, U-NII-1; lowest channel

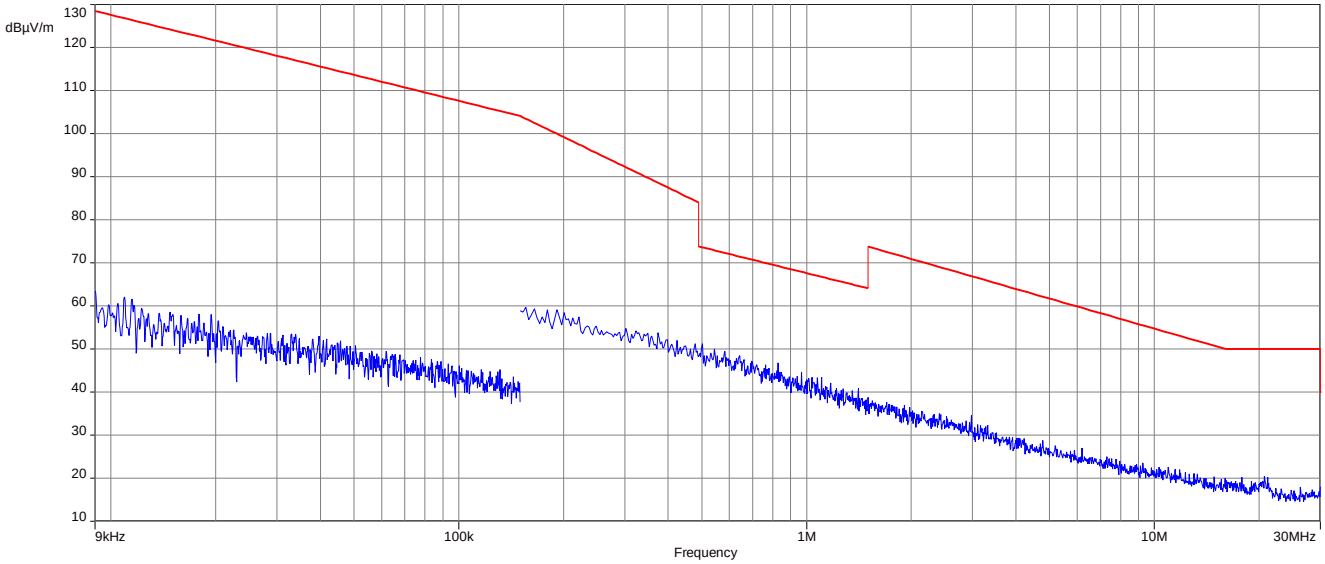

Plot 2: 9 kHz to 30 MHz, U-NII-1; middle channel

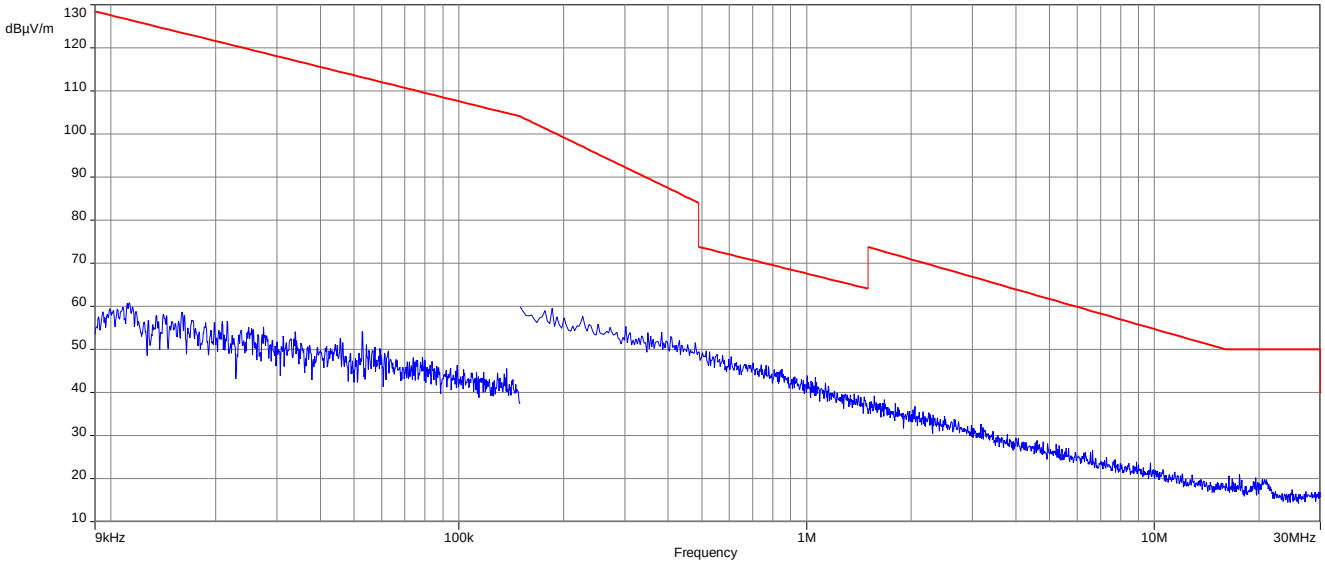

Plot 3: 9 kHz to 30 MHz, U-NII-1; highest channel

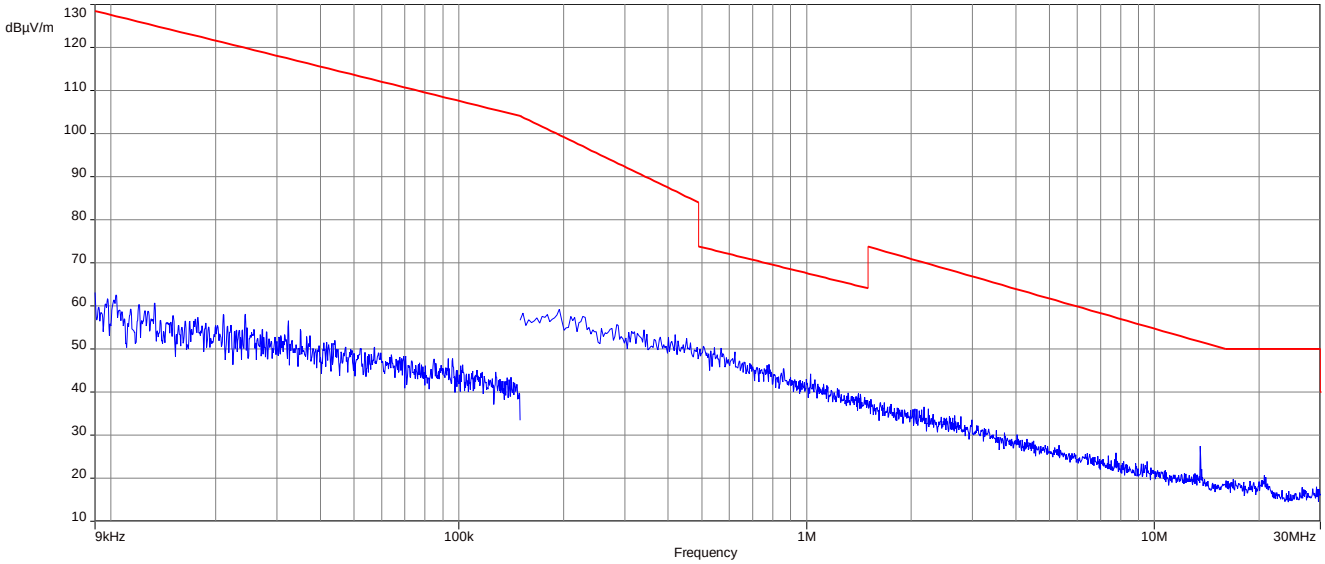

Plot 4: 9 kHz to 30 MHz, U-NII-2A; lowest channel

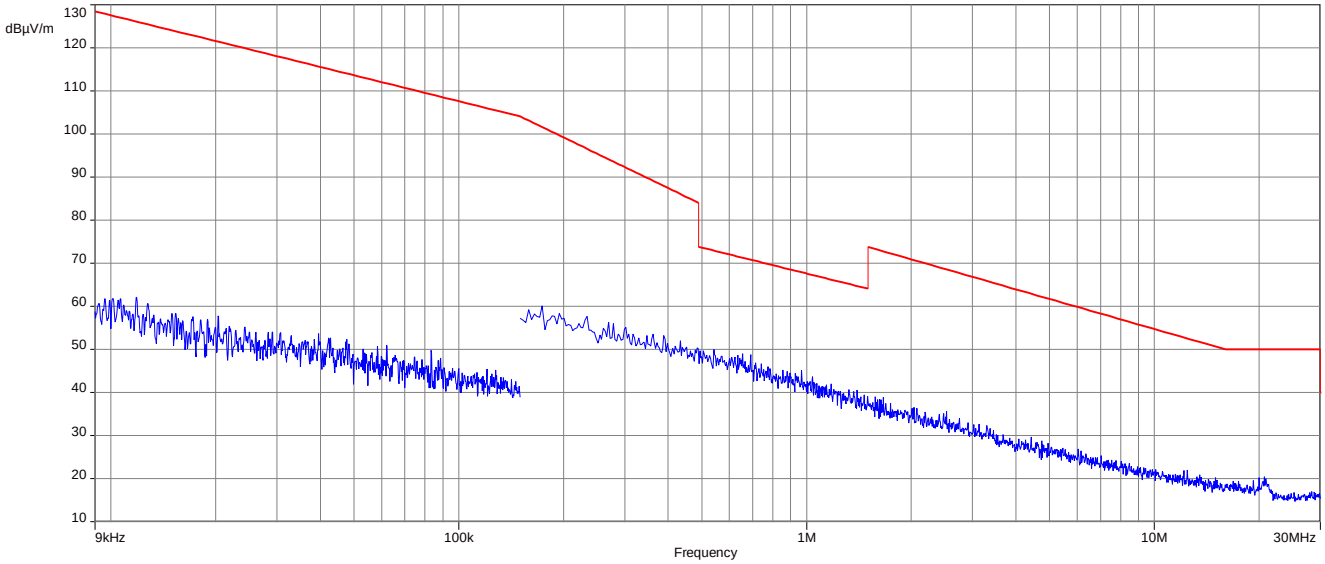

Plot 5: 9 kHz to 30 MHz, U-NII-2A; middle channel

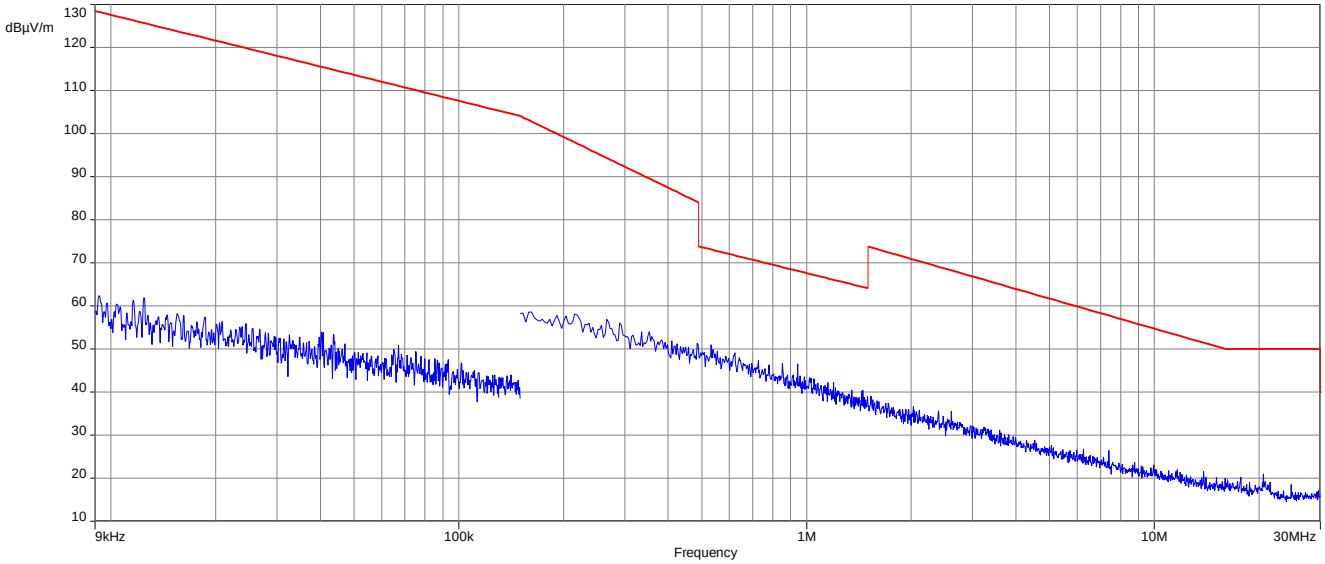

Plot 6: 9 kHz to 30 MHz, U-NII-2A; highest channel

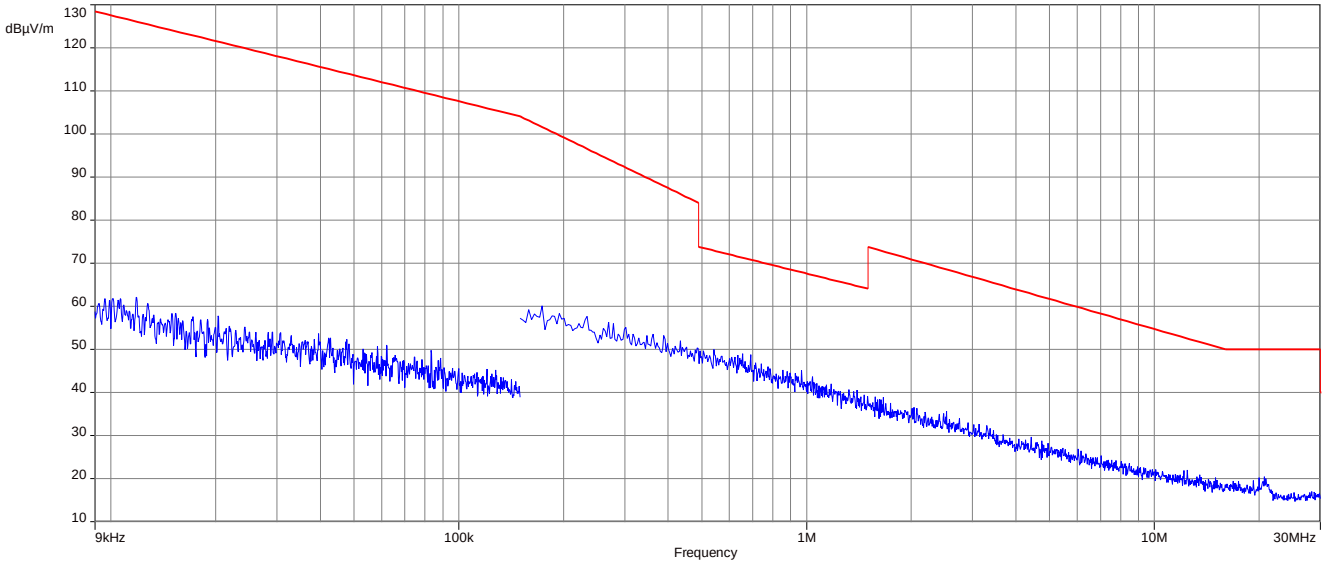

Plot 7: 9 kHz to 30 MHz, U-NII-2C; lowest channel

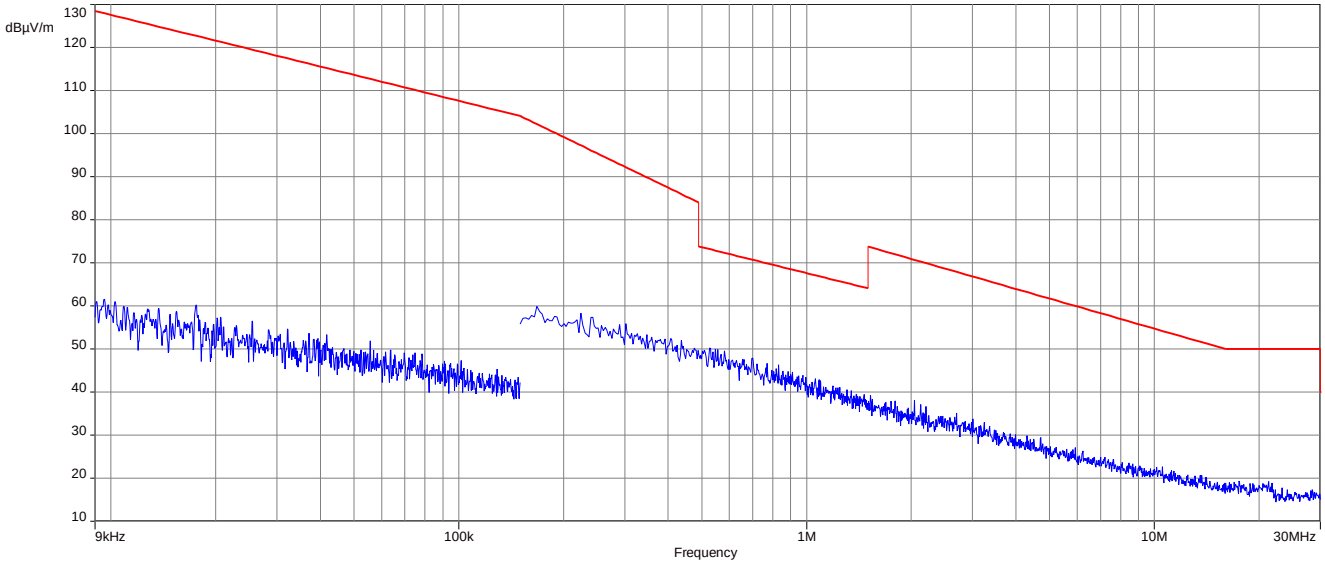

Plot 8: 9 kHz to 30 MHz, U-NII-2C; middle channel

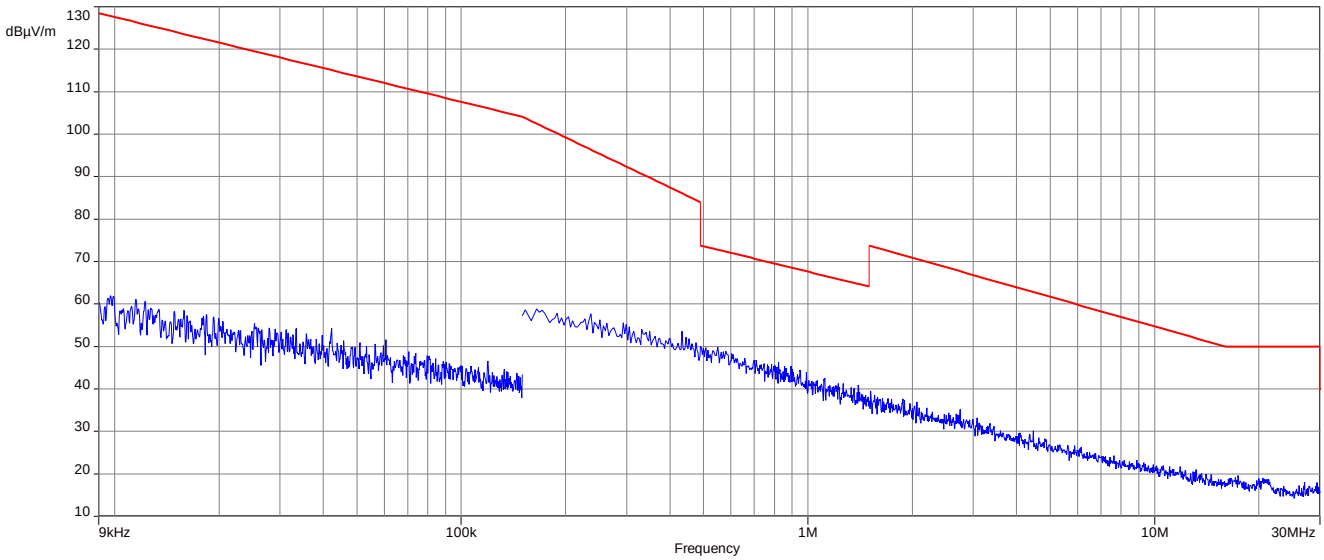

Plot 9: 9 kHz to 30 MHz, U-NII-2C; highest channel

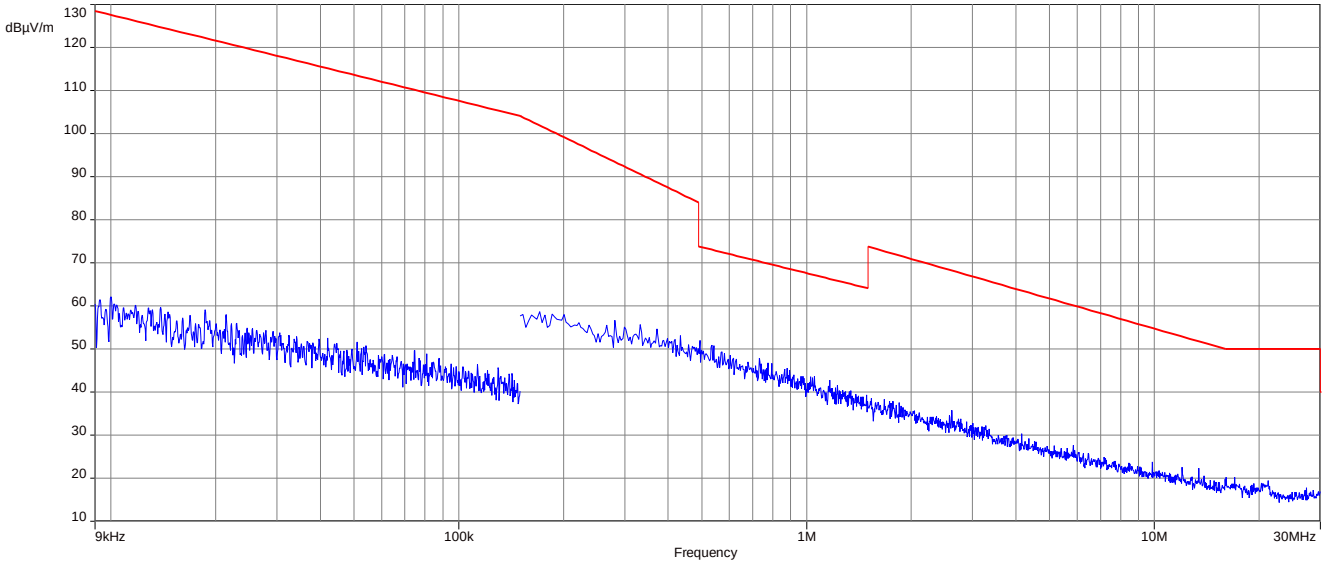

Plot 10: 9 kHz to 30 MHz, U-NII-3; lowest channel

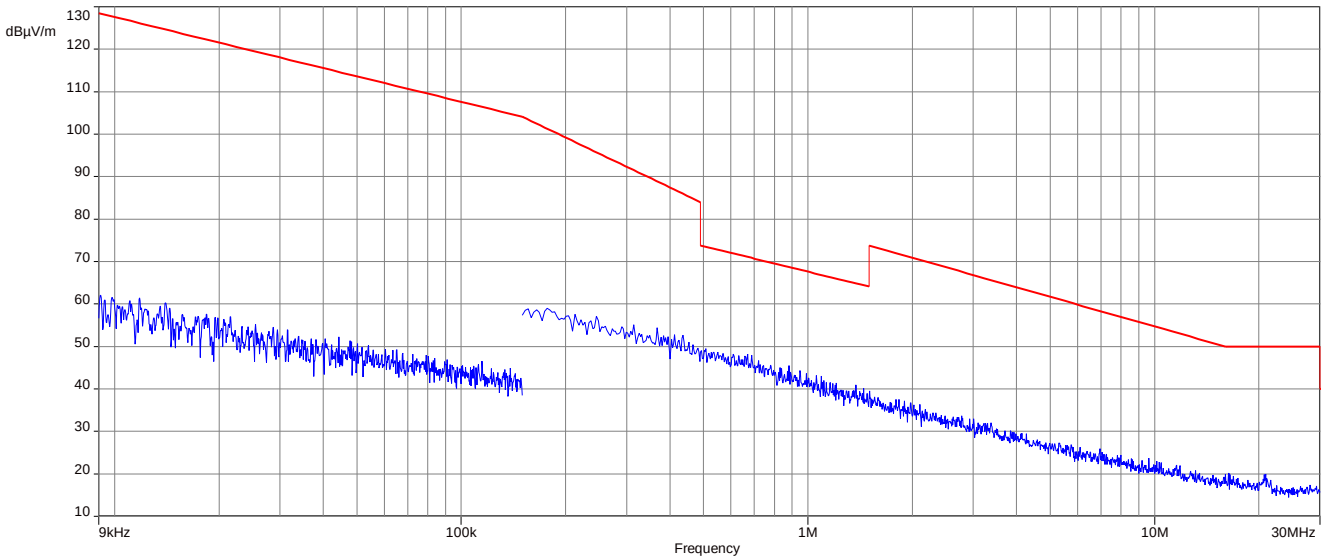

Plot 11: 9 kHz to 30 MHz, U-NII-3; middle channel

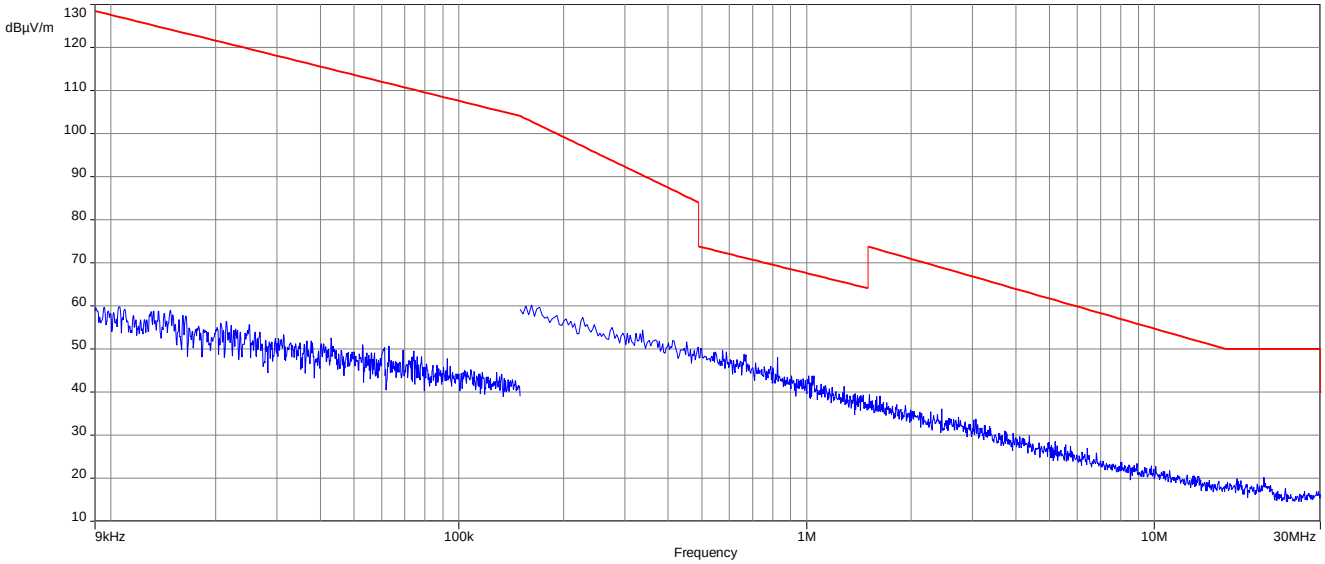

Plot 12: 9 kHz to 30 MHz, U-NII-3; highest channel

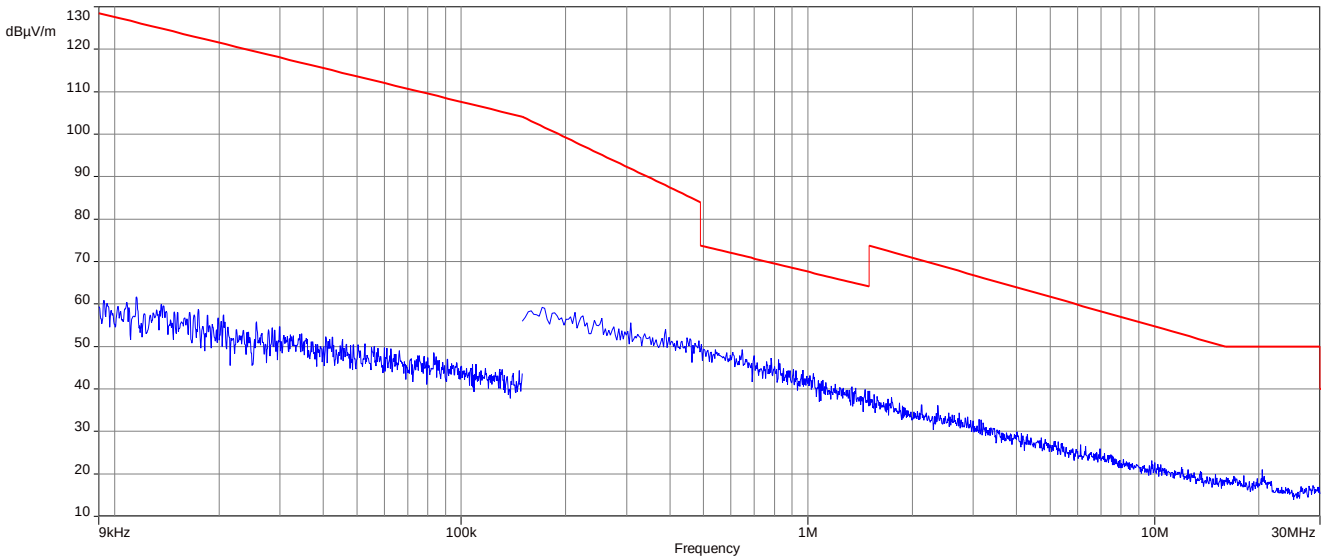

Plots: 40 MHz channel bandwidth

Plot 1: 9 kHz to 30 MHz, U-NII-1; lowest channel

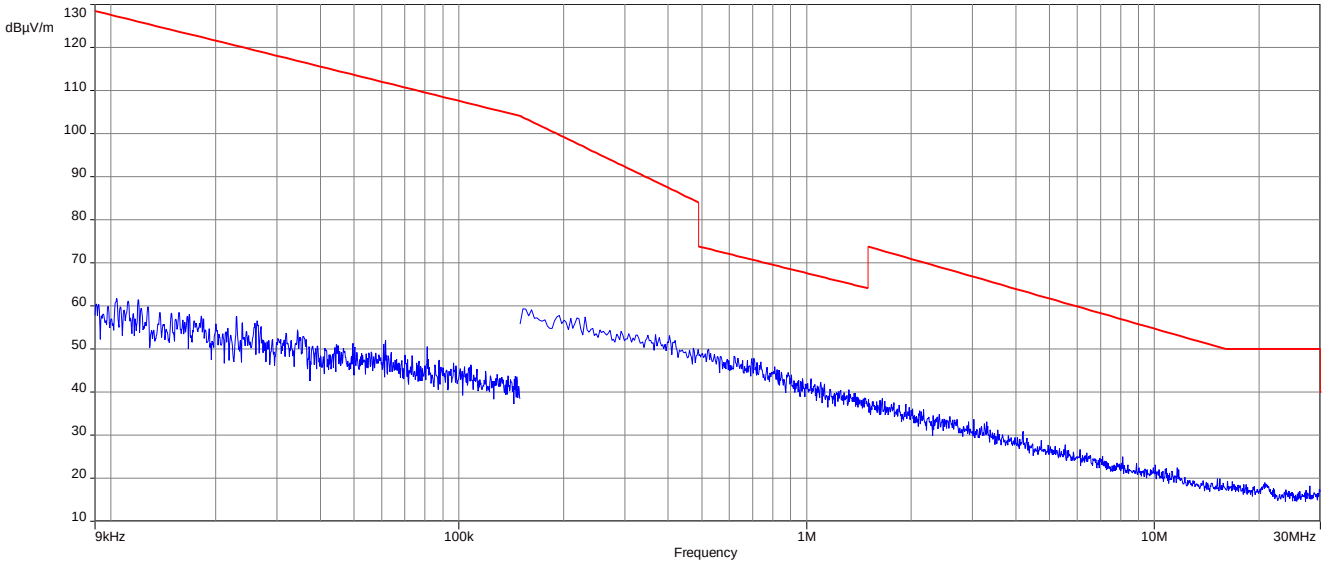

Plot 2: 9 kHz to 30 MHz, U-NII-1; highest channel

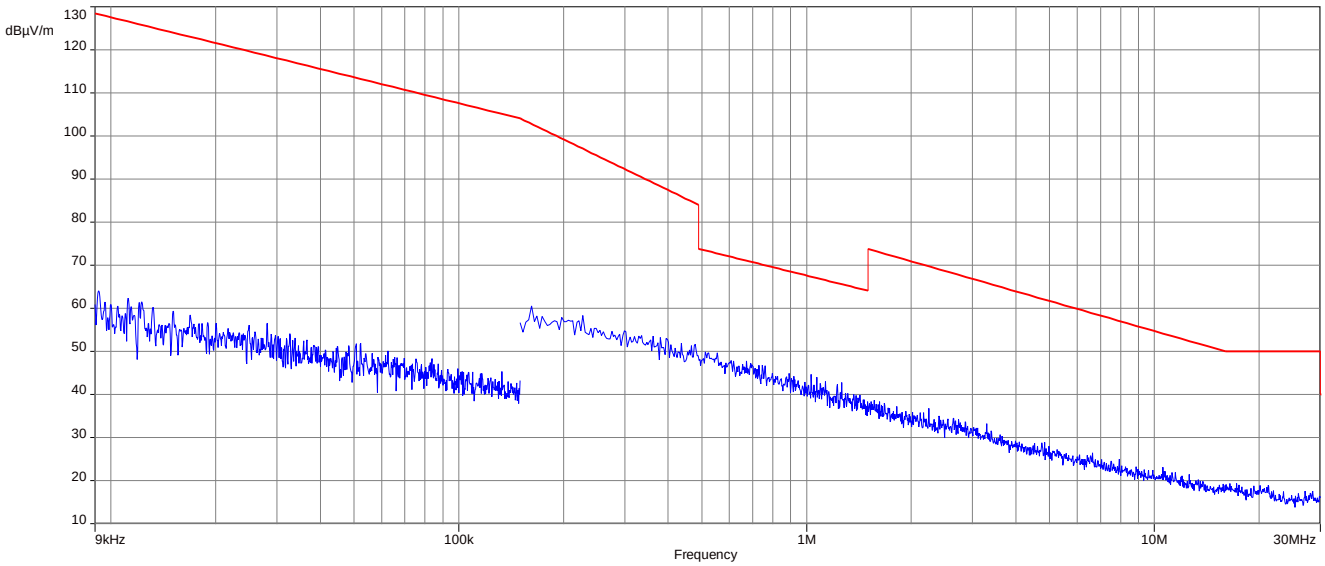

Plot 3: 9 kHz to 30 MHz, U-NII-2A; lowest channel

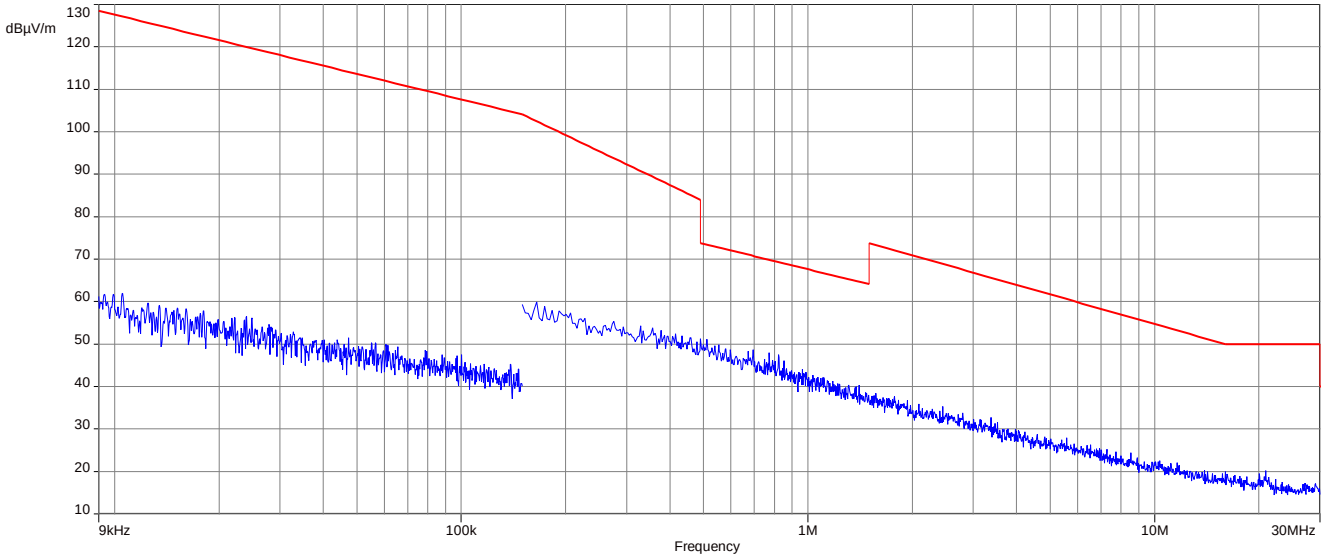

Plot 4: 9 kHz to 30 MHz, U-NII-2A; highest channel

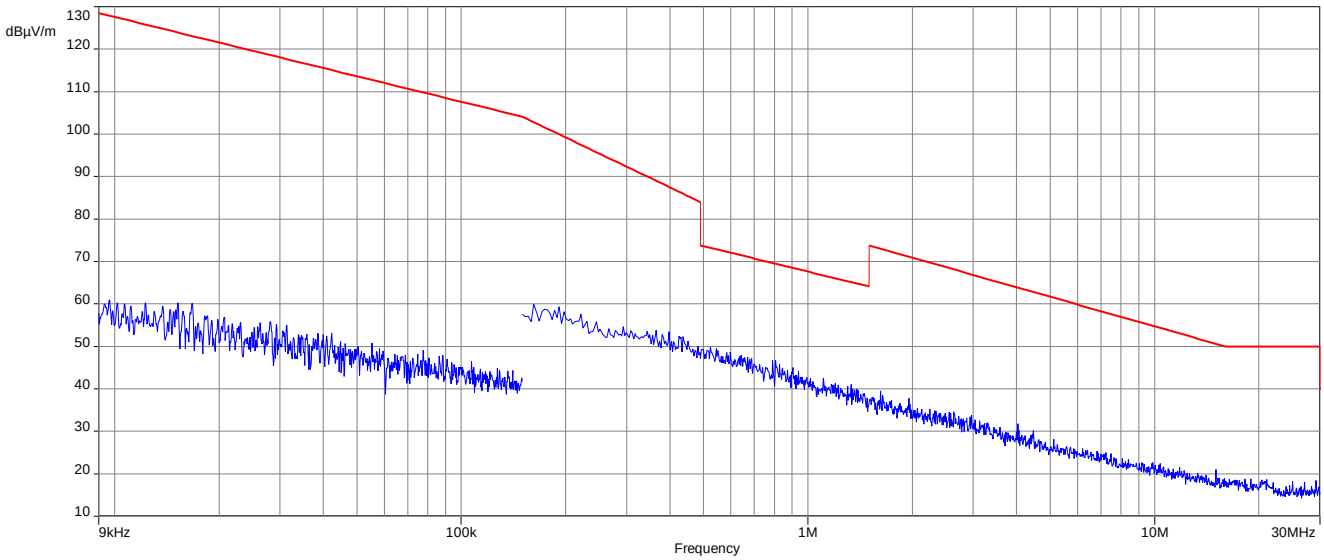

Plot 5: 9 kHz to 30 MHz, U-NII-2C; lowest channel

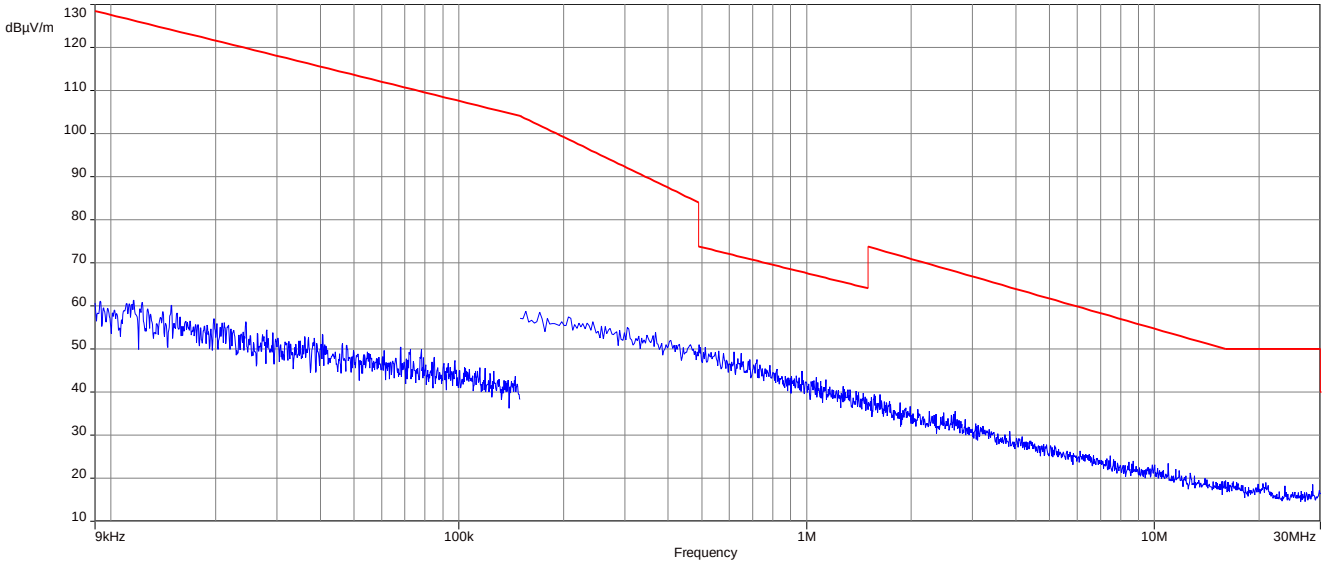

Plot 6: 9 kHz to 30 MHz, U-NII-2C; middle channel

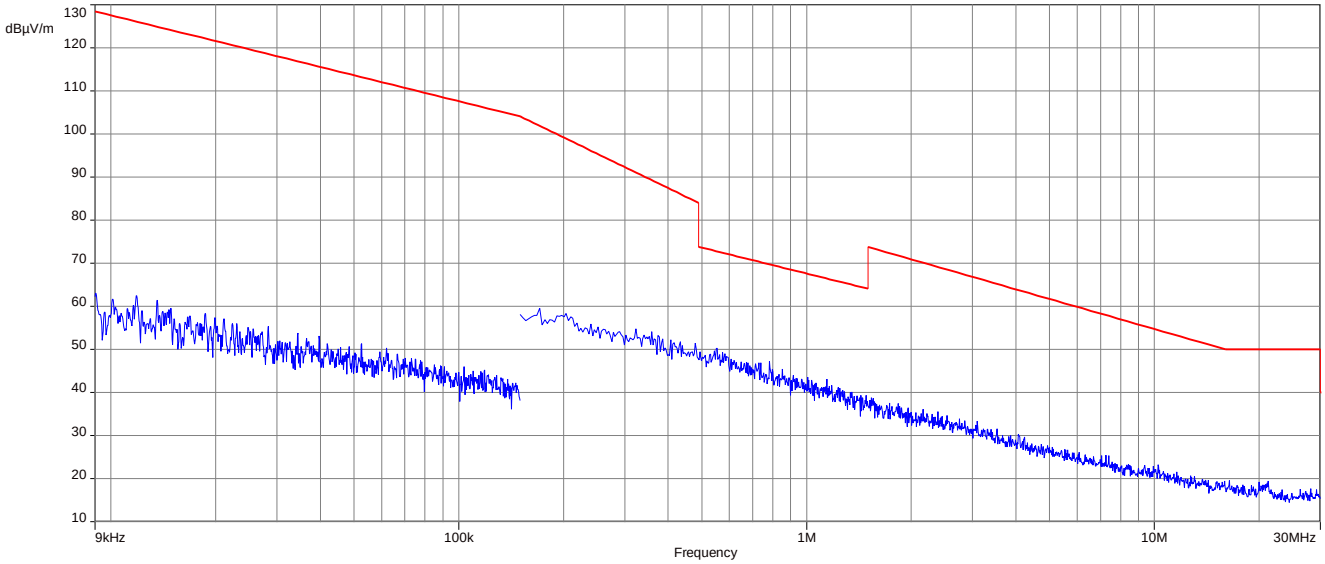

Plot 7: 9 kHz to 30 MHz, U-NII-2C; highest channel

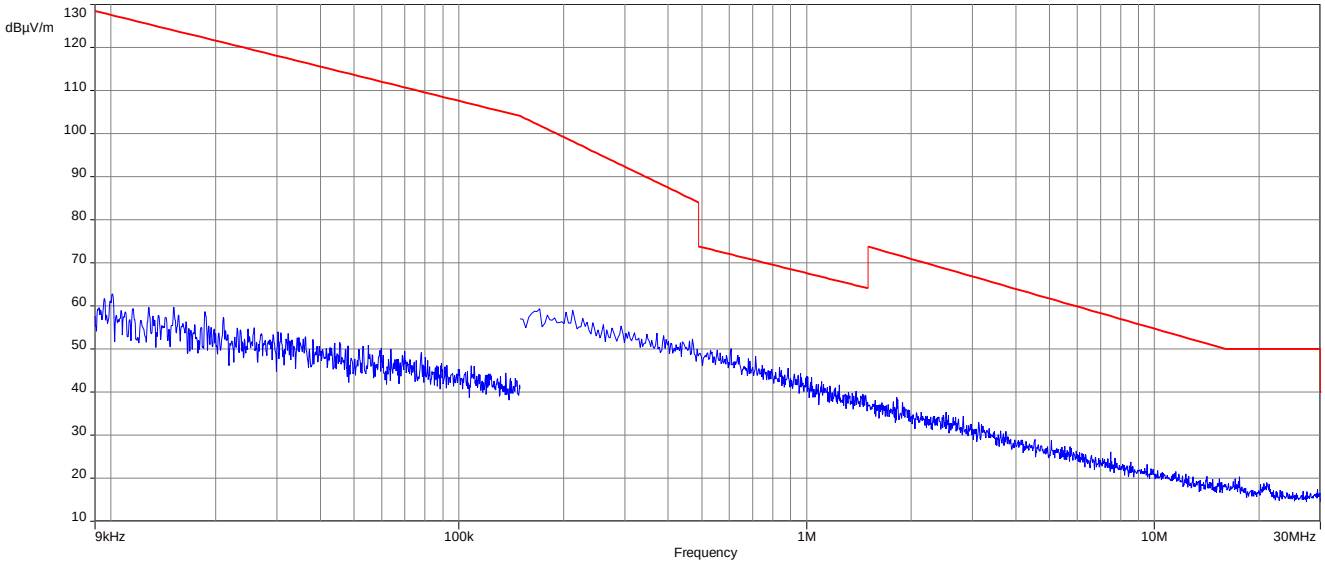

Plot 8: 9 kHz to 30 MHz, U-NII-3; lowest channel

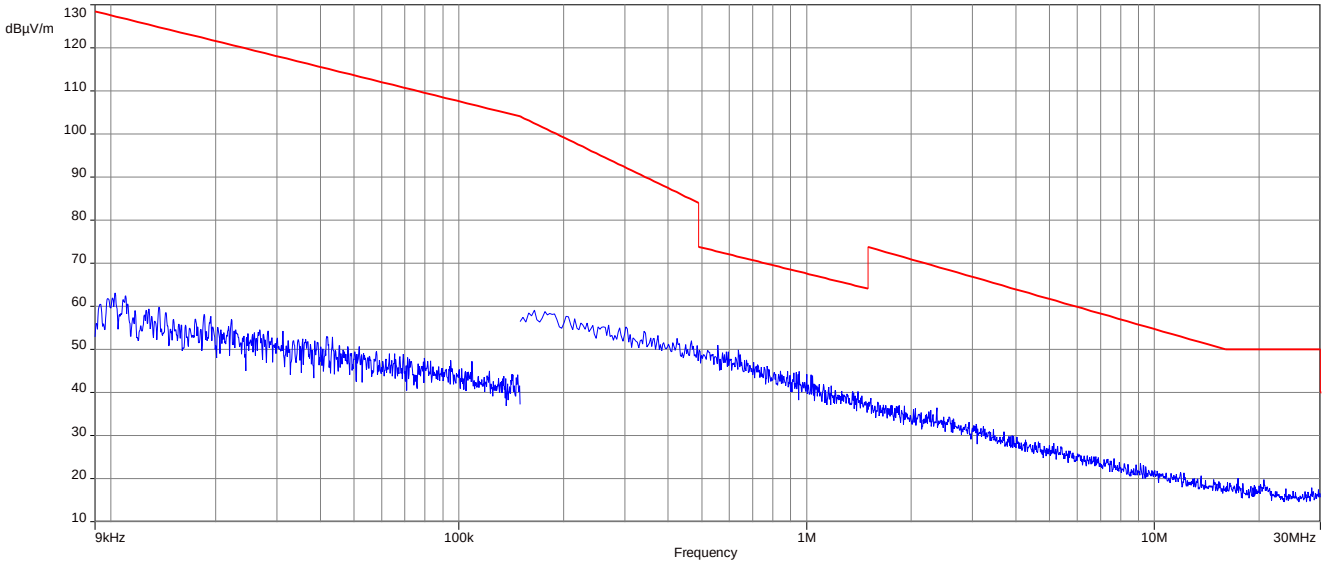

Plot 9: 9 kHz to 30 MHz, U-NII-3; highest channel

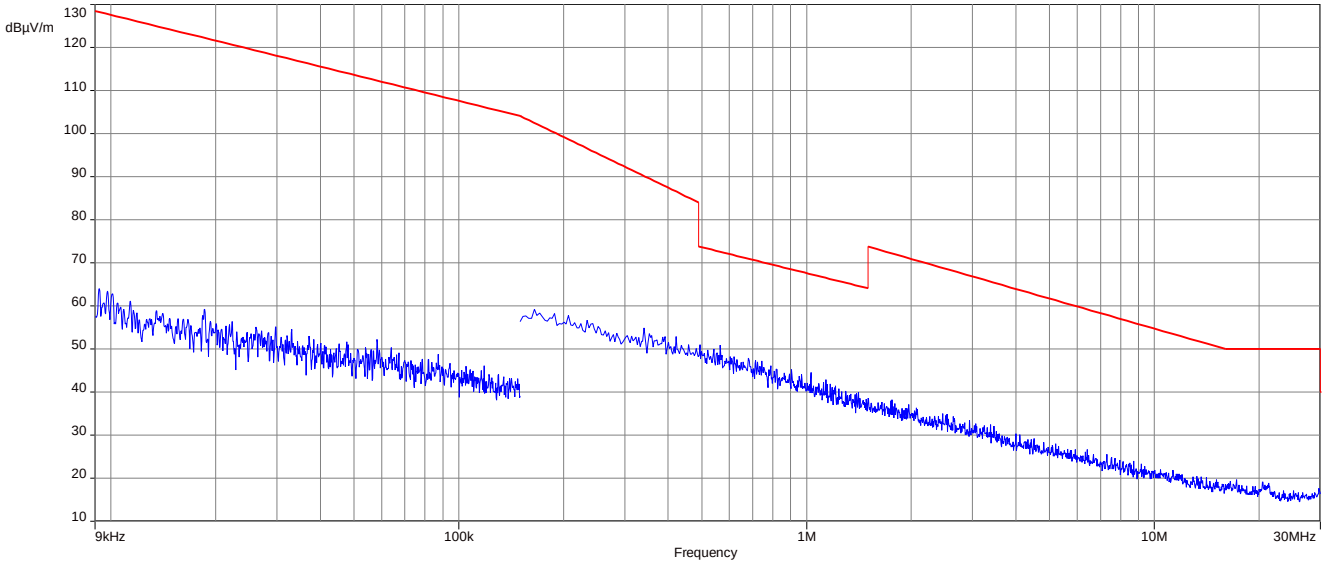

Plots: 80 MHz channel bandwidth

Plot 1: 9 kHz to 30 MHz, U-NII-1; middle channel

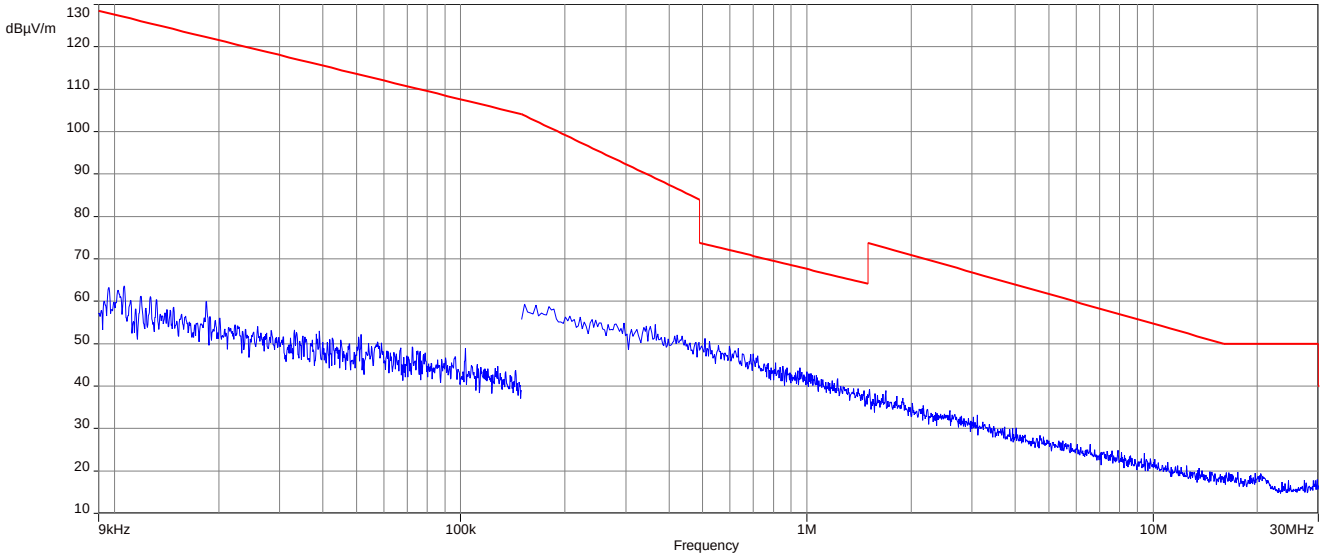

Plot 2: 9 kHz to 30 MHz, U-NII-2A; middle channel

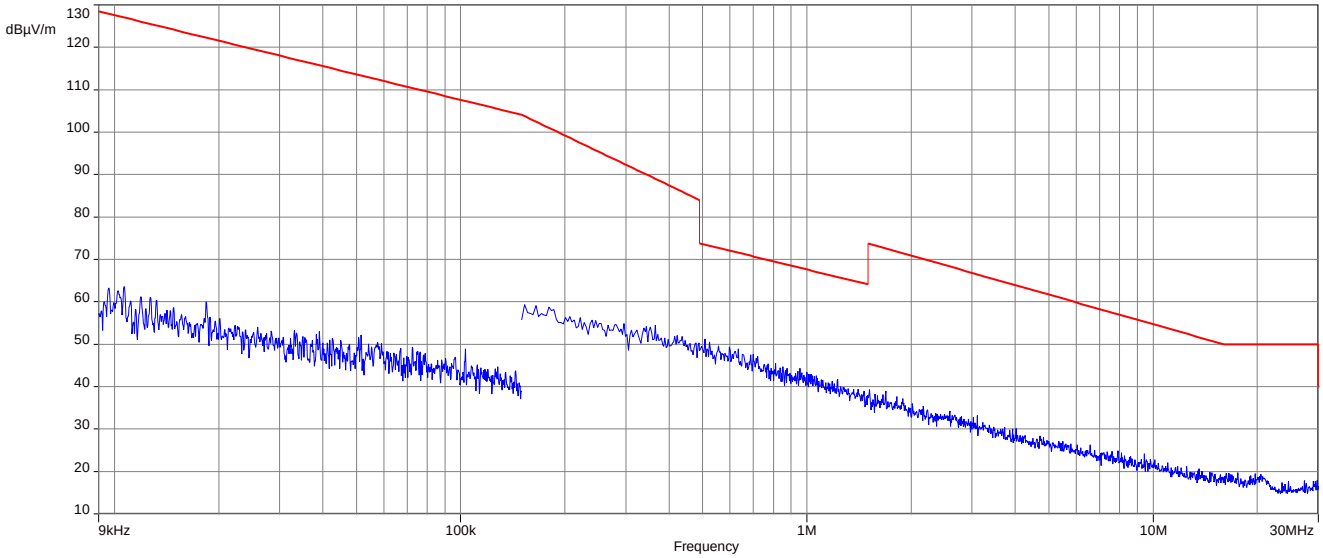

Plot 3: 9 kHz to 30 MHz, U-NII-2C; lowest channel

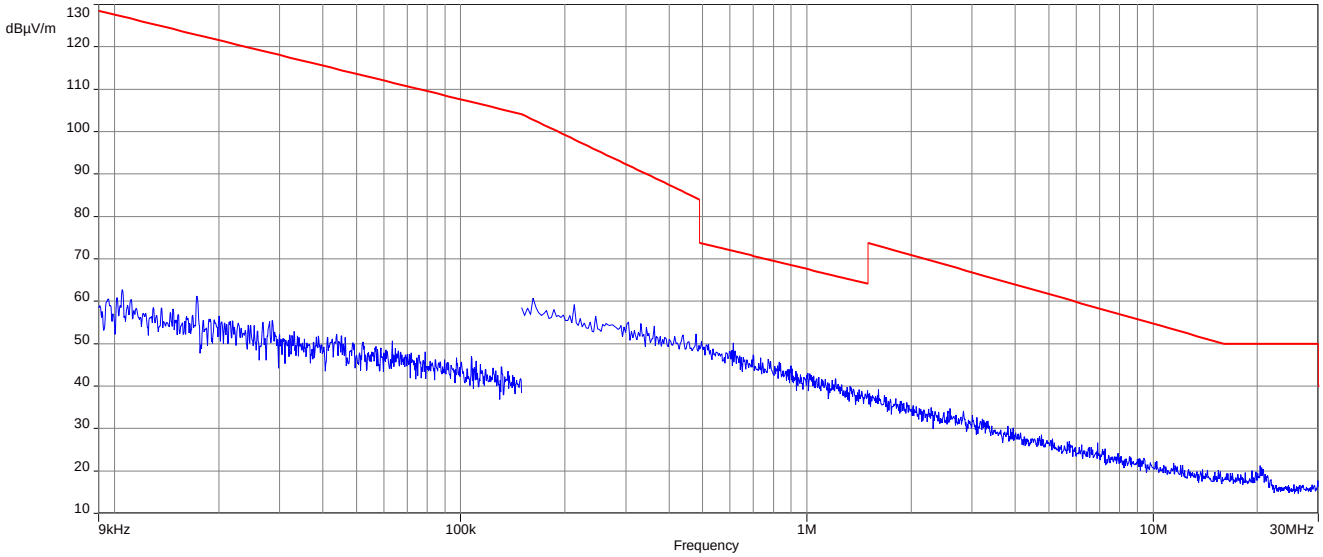

Plot 4: 9 kHz to 30 MHz, U-NII-2C; highest channel

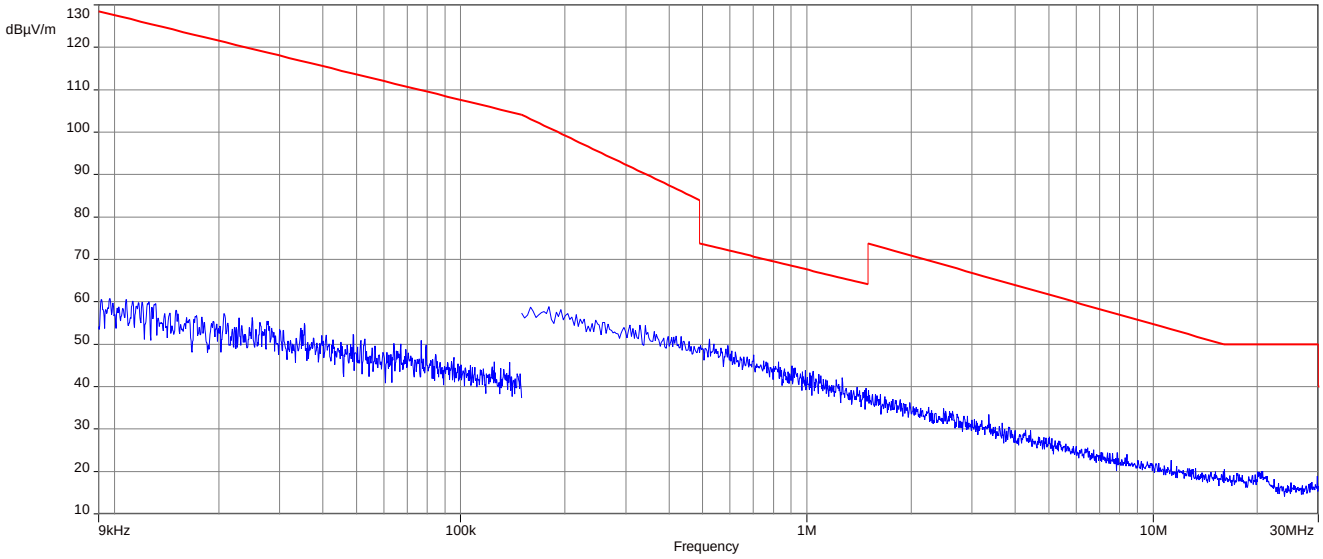

Plot 5: 9 kHz to 30 MHz, U-NII-3; middle channel

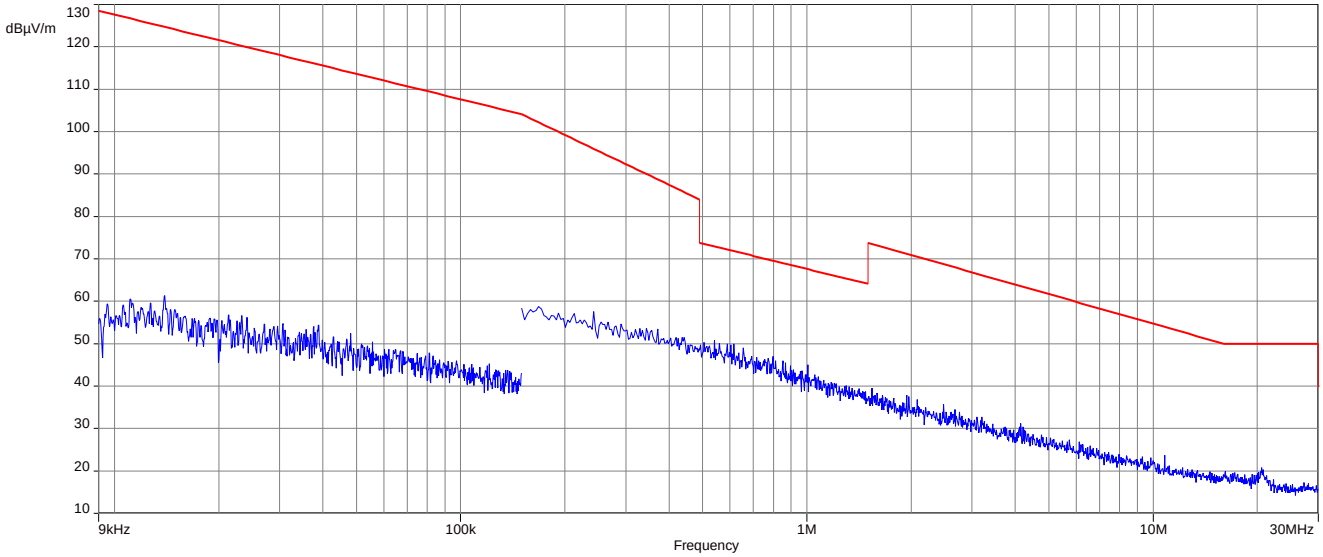

12.12 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:

Measurement parameter	
Detector:	Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	120 kHz
Video bandwidth:	500 kHz
Span:	30 MHz to 1 GHz
Test setup:	See sub clause 7.1 – A
Measurement uncertainty:	See chapter 9

Limits:

TX Spurious Emissions Radiated		
§15.209 / RSS-247		
Frequency (MHz)	**Field Strength (dBµV/m)**	**Measurement distance**
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

Plots: 20 MHz channel bandwidth

Plot 1: 30 MHz to 1 GHz; vertical & horizontal polarization; valid for all channels and bands

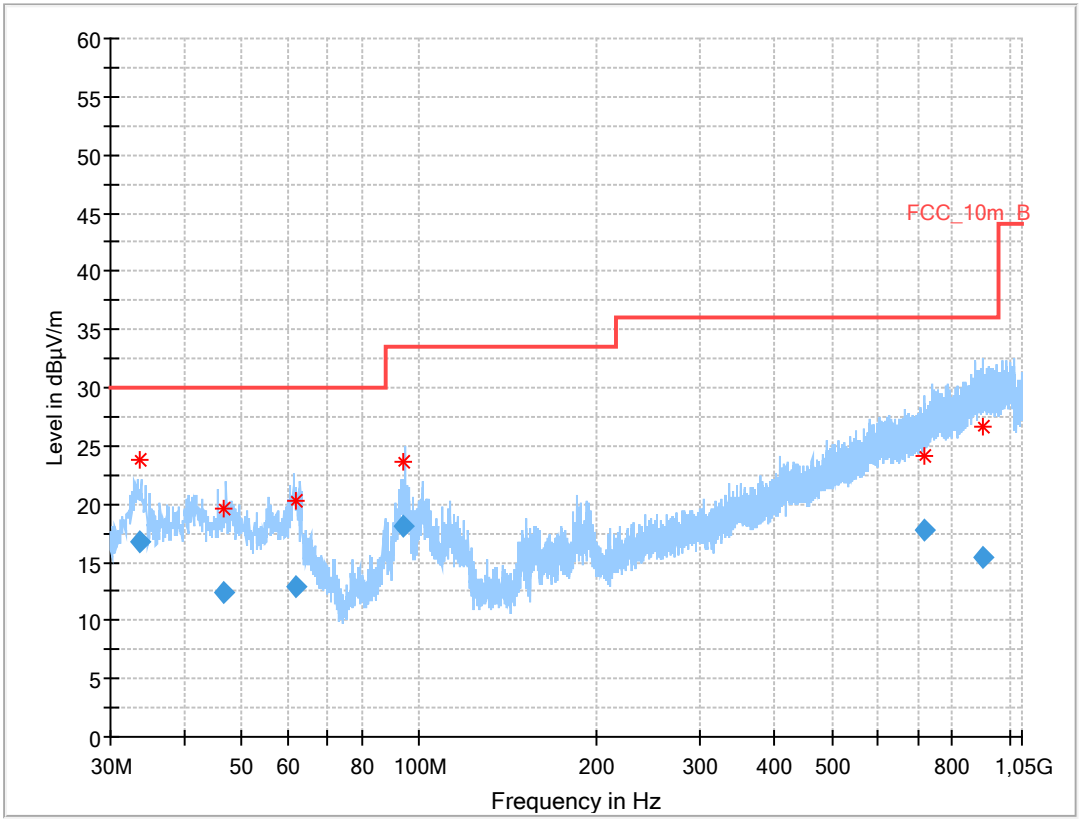

Results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.689	16.75	30.0	13.3	1000	120.0	149.0	V	243	14
46.782	12.48	30.0	17.5	1000	120.0	203.0	V	8	16
62.010	12.86	30.0	17.1	1000	120.0	294.0	V	180	13
94.209	18.12	33.5	15.4	1000	120.0	111.0	V	302	12
719.380	17.72	36.0	18.3	1000	120.0	200.0	V	270	23
903.921	15.49	36.0	20.5	1000	120.0	200.0	V	180	26

Plots: 40 MHz channel bandwidth

Plot 2: 30 MHz to 1 GHz; vertical & horizontal polarization; valid for all channels and bands

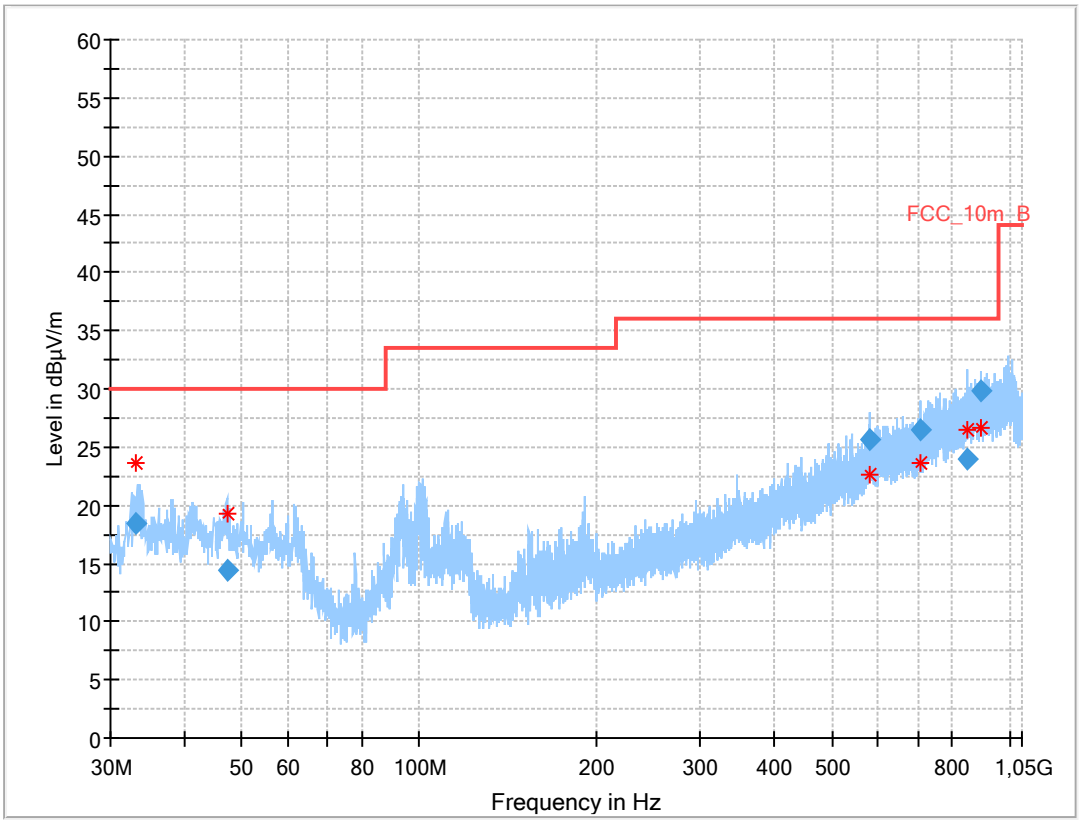

Results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.689	16.75	30.0	13.3	1000	120.0	149.0	V	243	14
46.782	12.48	30.0	17.5	1000	120.0	203.0	V	8	16
62.010	12.86	30.0	17.1	1000	120.0	294.0	V	180	13
94.209	18.12	33.5	15.4	1000	120.0	111.0	V	302	12
719.380	17.72	36.0	18.3	1000	120.0	200.0	V	270	23
903.921	15.49	36.0	20.5	1000	120.0	200.0	V	180	26

Plots: 80 MHz channel bandwidth

Plot 3: 30 MHz to 1 GHz; vertical & horizontal polarization; valid for all channels and bands

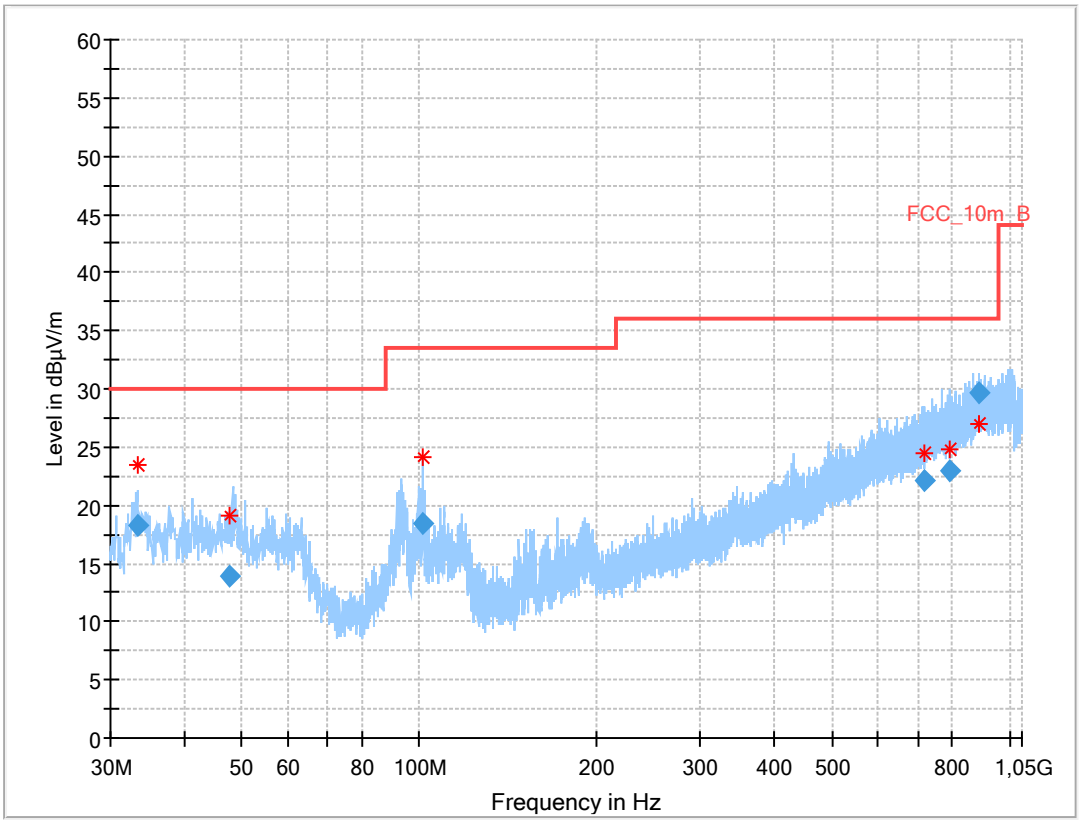

Results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.347	18.26	30.0	11.7	1000	120.0	102.0	V	243	14
47.763	13.96	30.0	16.0	1000	120.0	195.0	V	192	16
101.787	18.51	33.5	15.0	1000	120.0	110.0	V	284	14
715.398	22.07	36.0	13.9	1000	120.0	182.0	H	142	23
792.389	22.88	36.0	13.1	1000	120.0	149.0	H	-31	24
888.348	29.74	36.0	6.3	1000	120.0	195.0	H	-37	25

12.13 Spurious emissions radiated 1 GHz to 40 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations from 1 GHz to 40 GHz.

Measurement:

Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	1 GHz to 40 GHz
Trace mode:	Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 %
Test setup:	See sub clause 7.2 – B See sub clause 7.3 – A
Measurement uncertainty:	See chapter 9

Limits:

TX Spurious Emissions Radiated		
§15.209 / RSS-247		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

Results: 20 MHz channel bandwidth

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-1 (5150 MHz to 5250 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-		Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-2A (5250 MHz to 5350 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-		Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-2C (5470 MHz to 5725 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-	-/-	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-3 (5725 MHz to 5850 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

Results: 40 MHz channel bandwidth

TX Spurious Emissions Radiated [dBµV/m] / dBm					
U-NII-1 (5150 MHz to 5250 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm					
U-NII-2A (5250 MHz to 5350 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-2C (5470 MHz to 5725 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm					
U-NII-3 (5725 MHz to 5850 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

Results: 80 MHz channel bandwidth

TX Spurious Emissions Radiated [dBµV/m] / dBm		
U-NII-1 (5150 MHz to 5250 MHz)		
Middle channel		
F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm		
U-NII-2A (5250 MHz to 5350 MHz)		
Middle channel		
F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm					
U-NII-2C (5470 MHz to 5725 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm		
U-NII-3 (5725 MHz to 5850 MHz)		
Middle channel		
F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		

Note: The carrier signal is notched with a UNII band rejection filter.

Plots: 20 MHz channel bandwidth

Plot 1: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

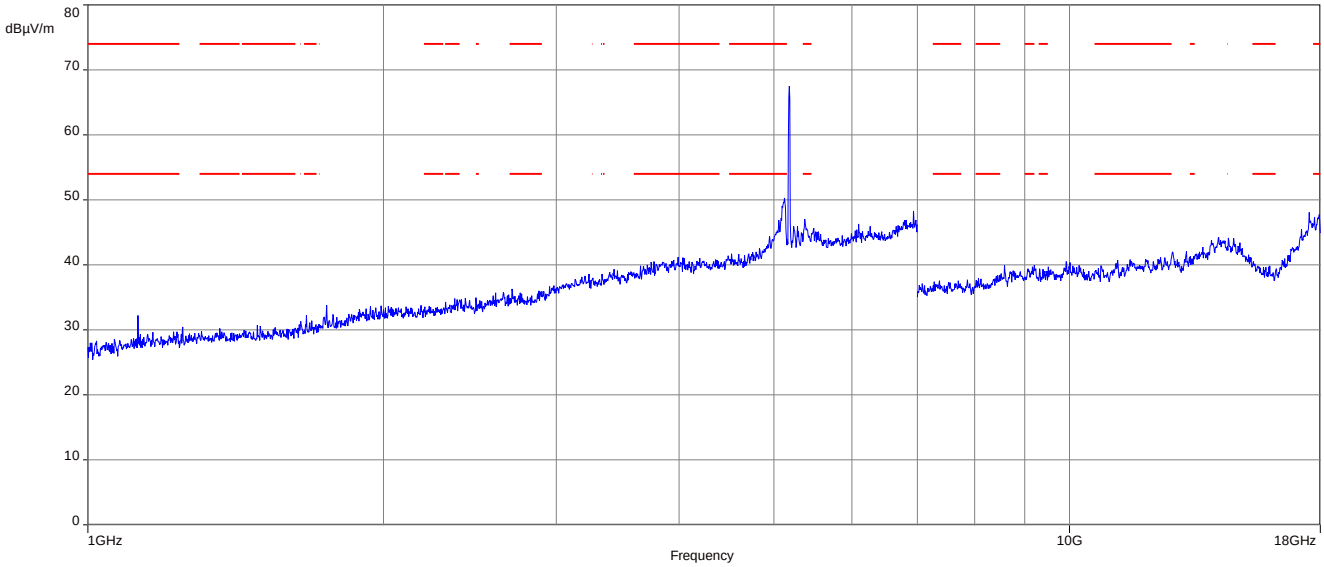

Plot 2: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; middle channel

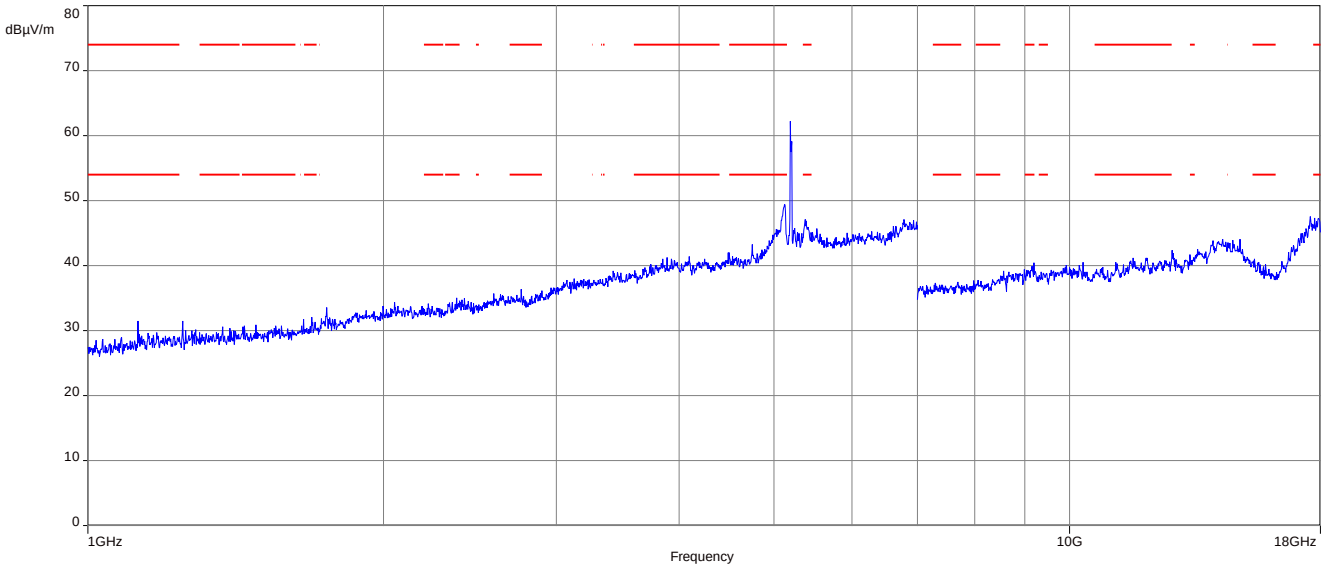

Plot 3: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel

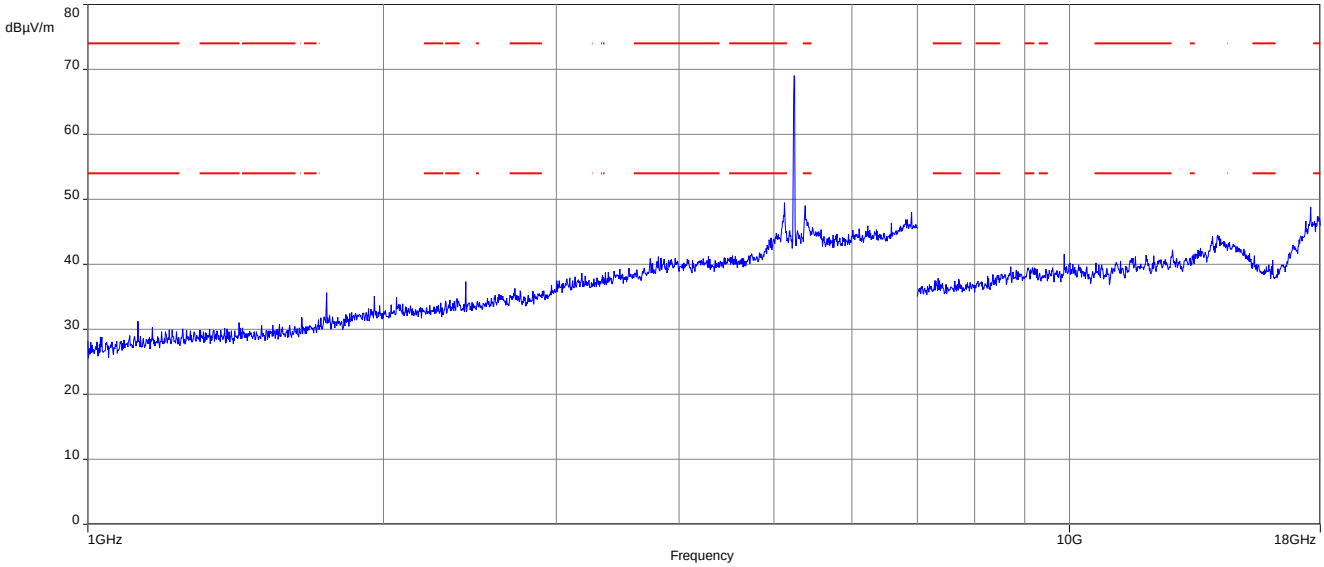

Plot 4: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; lowest channel

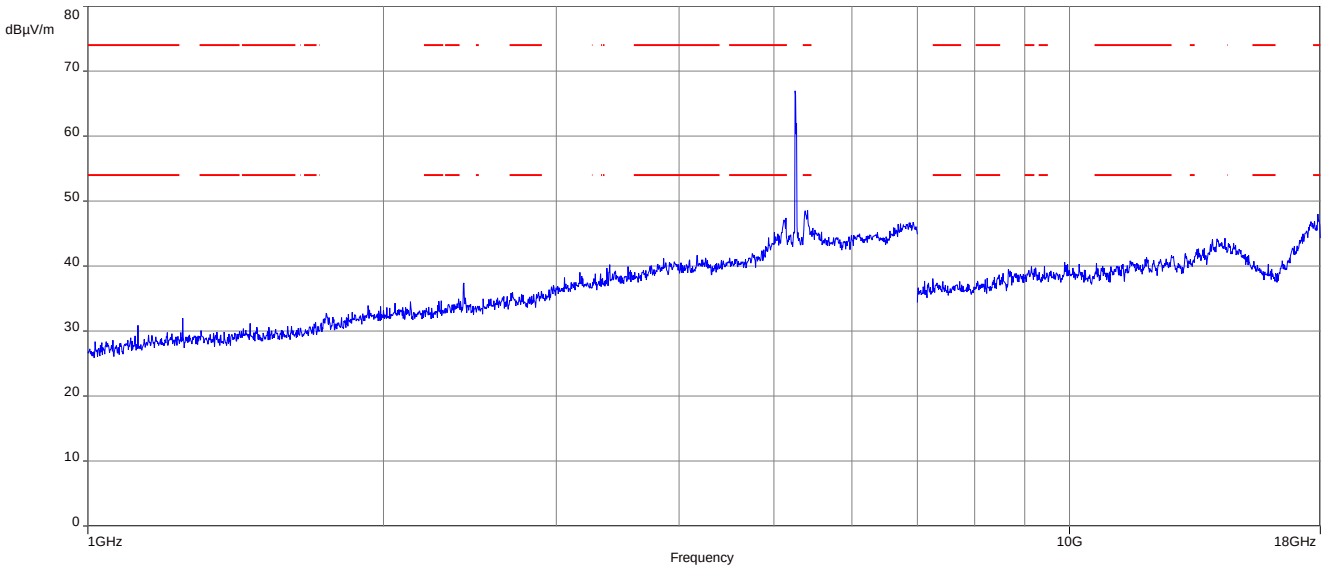

Plot 5: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; middle channel

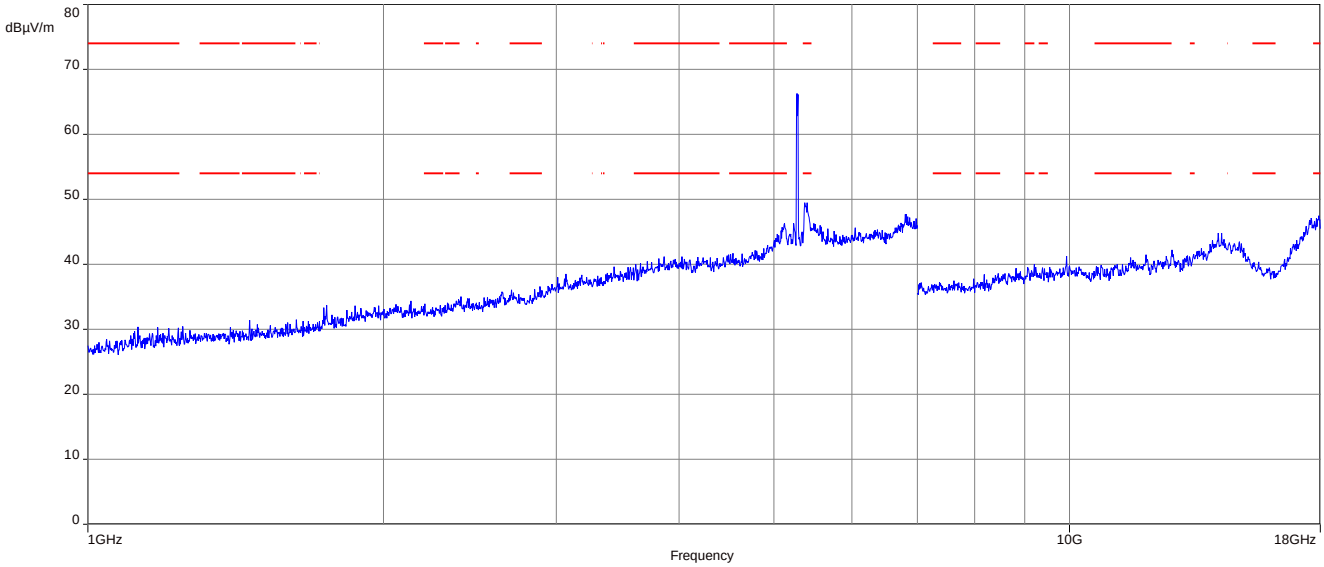

Plot 6: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; highest channel

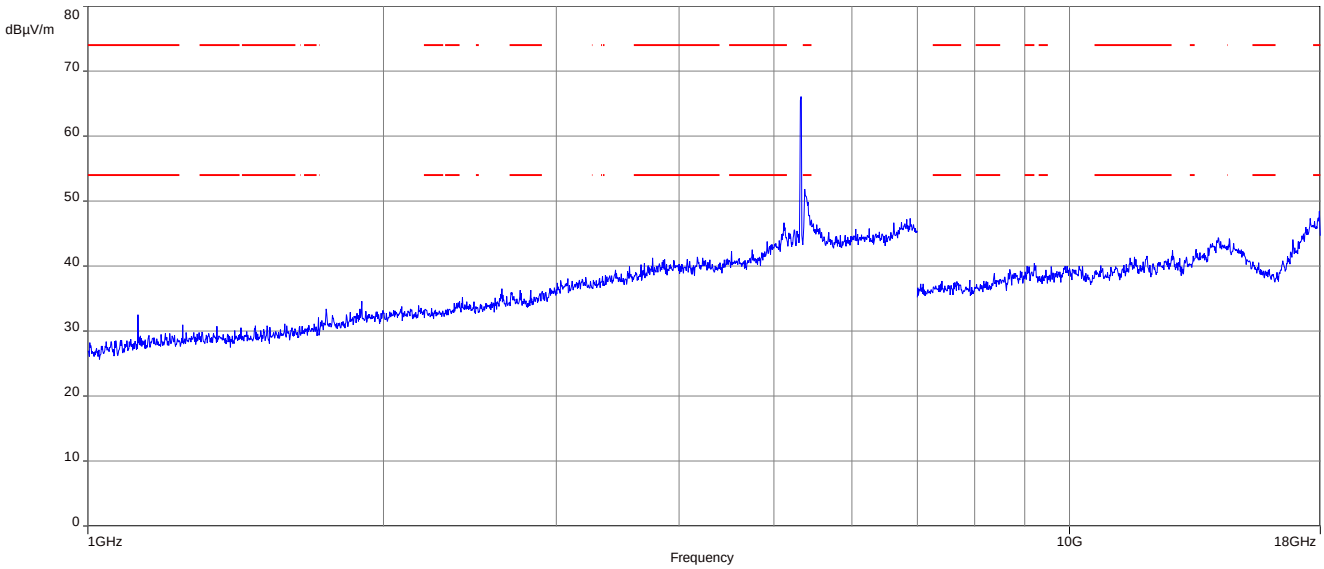

Plot 7: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

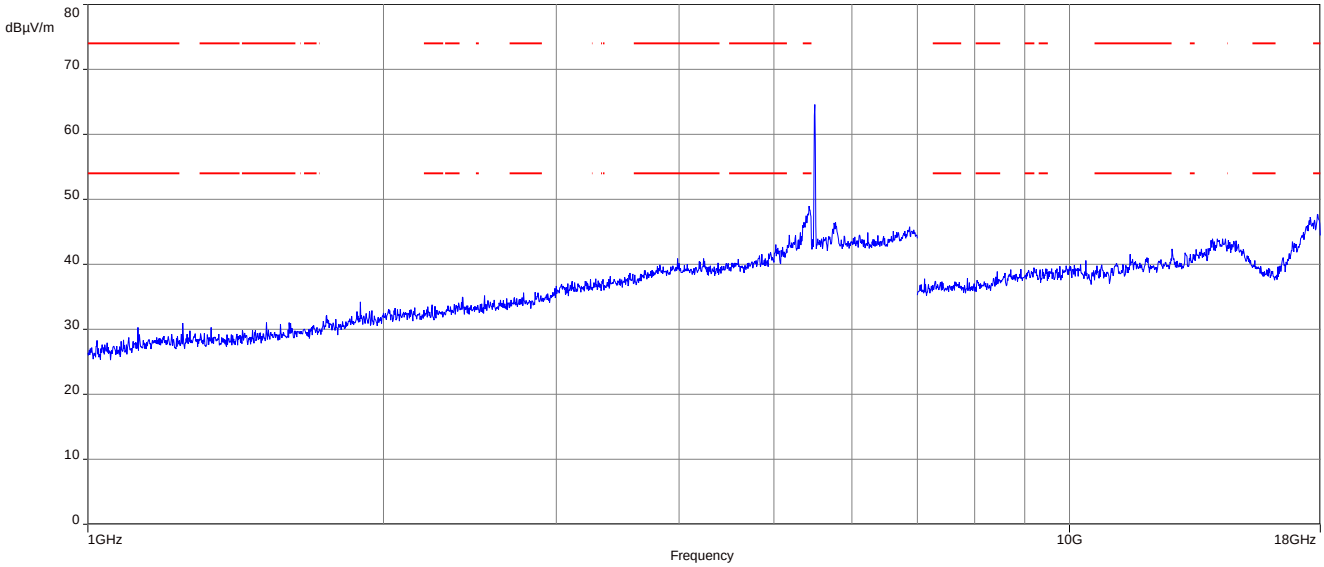

Plot 8: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel

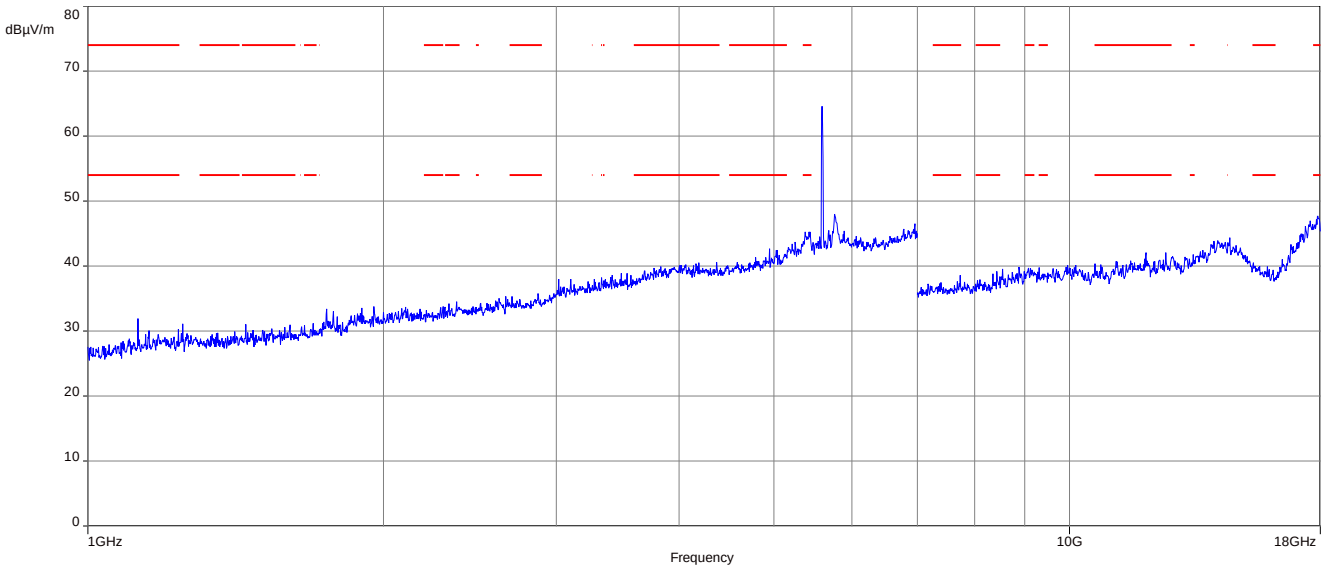

Plot 9: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

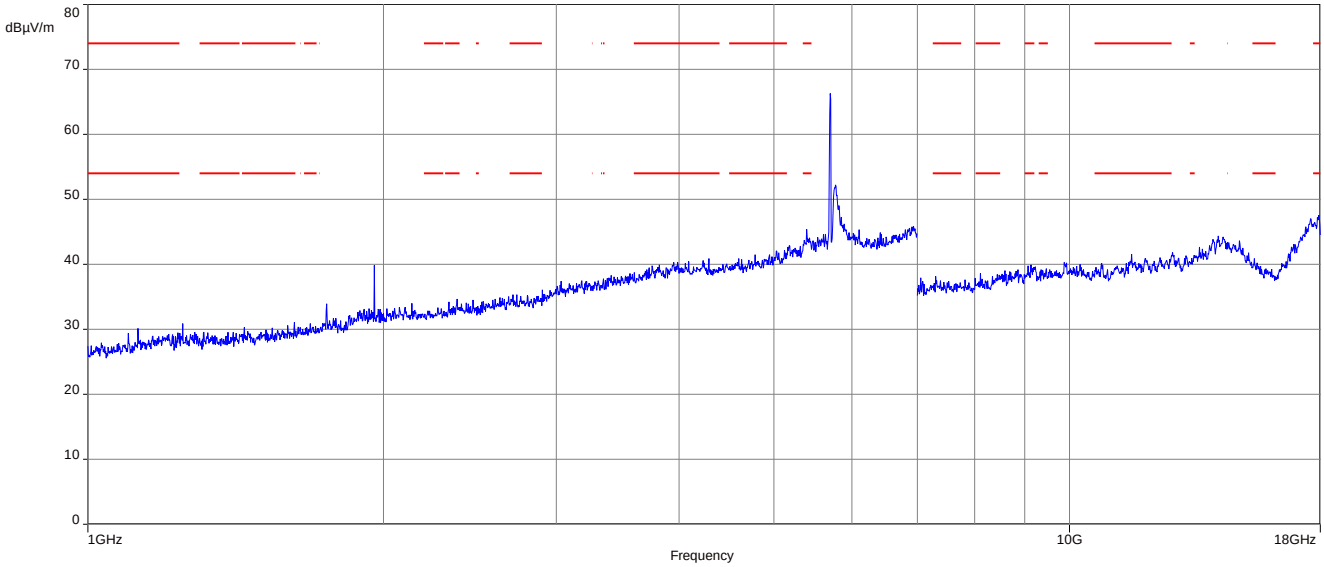

Plot 10: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

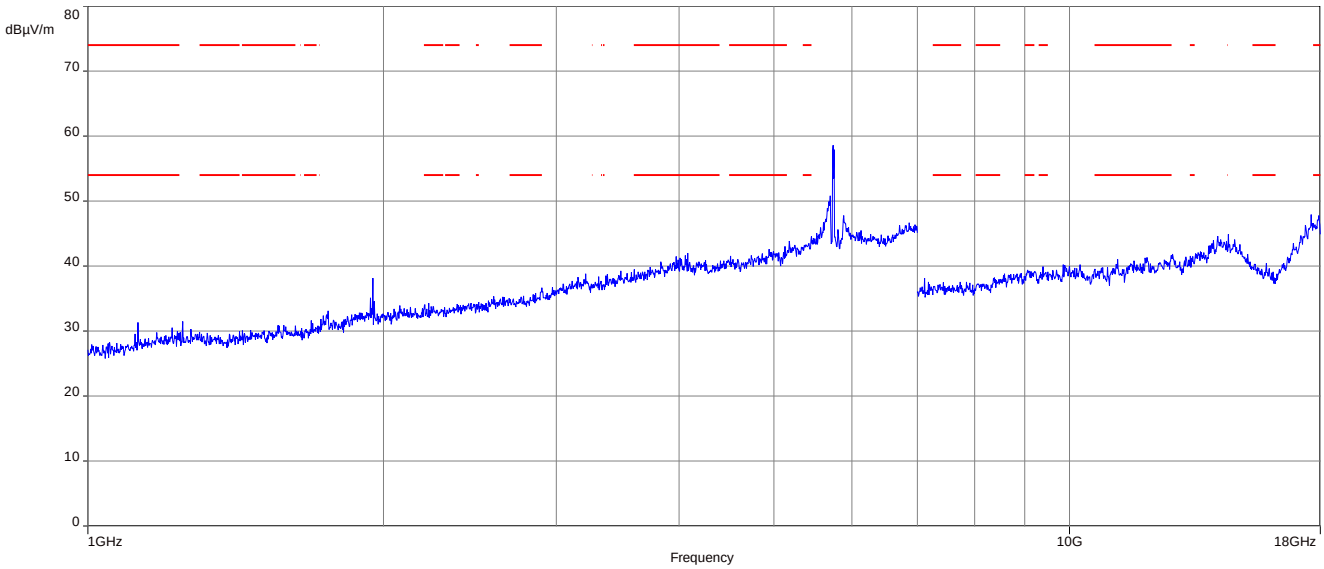

Plot 11: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; middle channel

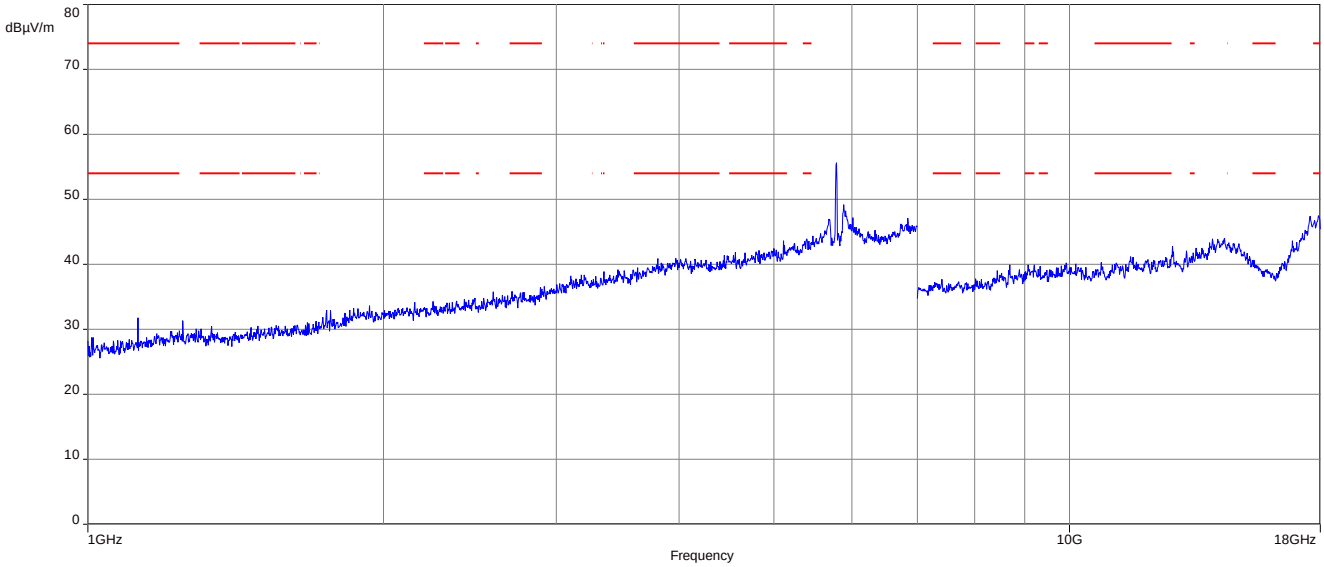

Plot 12: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel

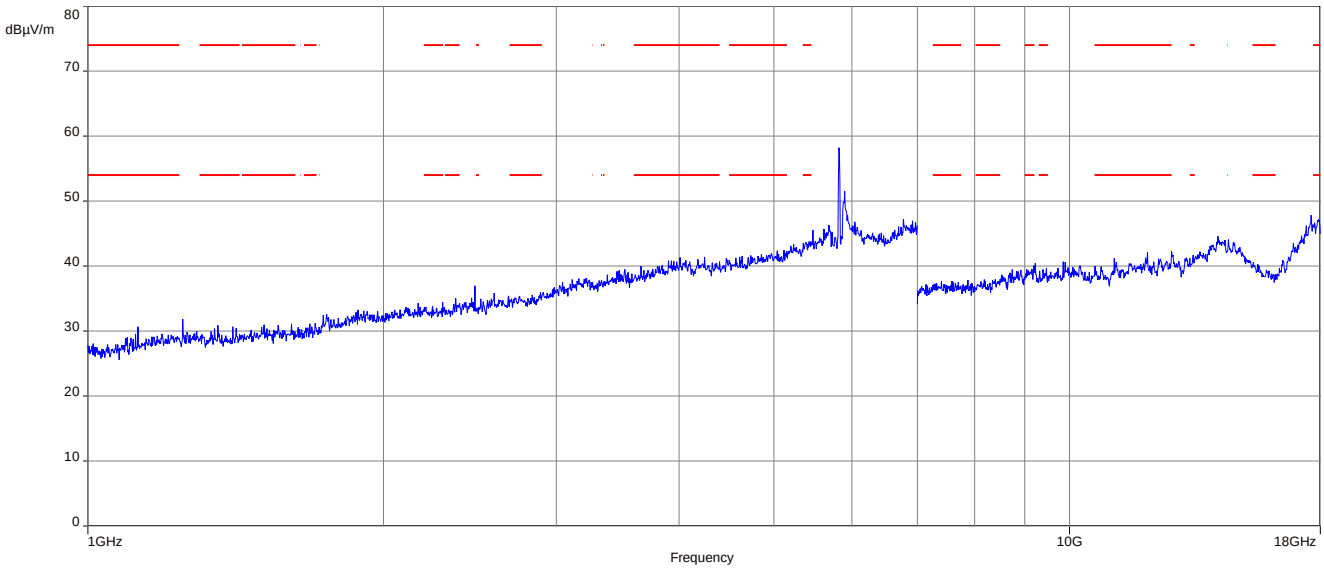

Plot 13: 18 GHz to 26 GHz; vertical & horizontal polarization; all channels

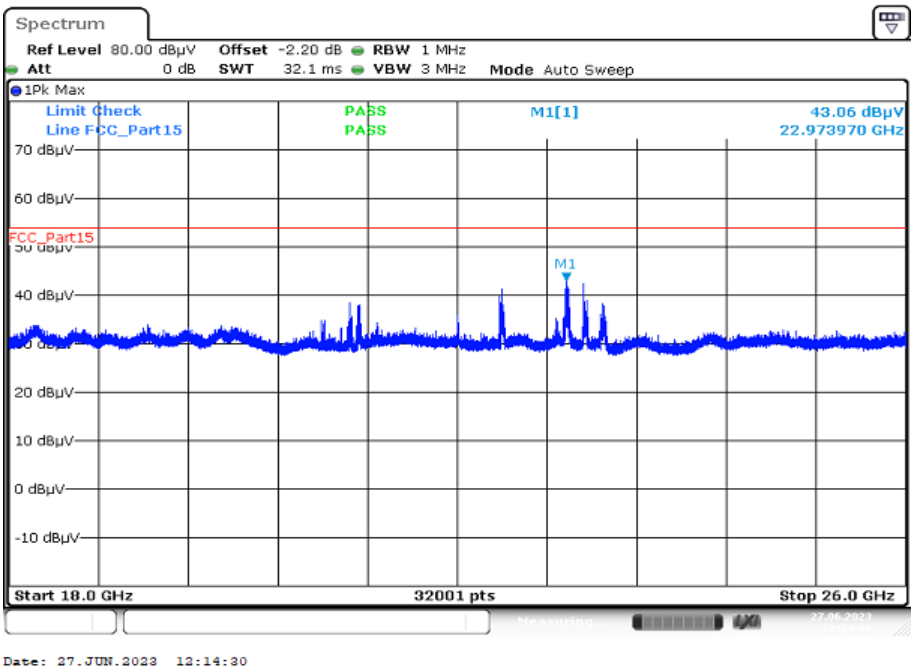

Plot 14: 26 GHz to 40 GHz; vertical & horizontal polarization; all channels

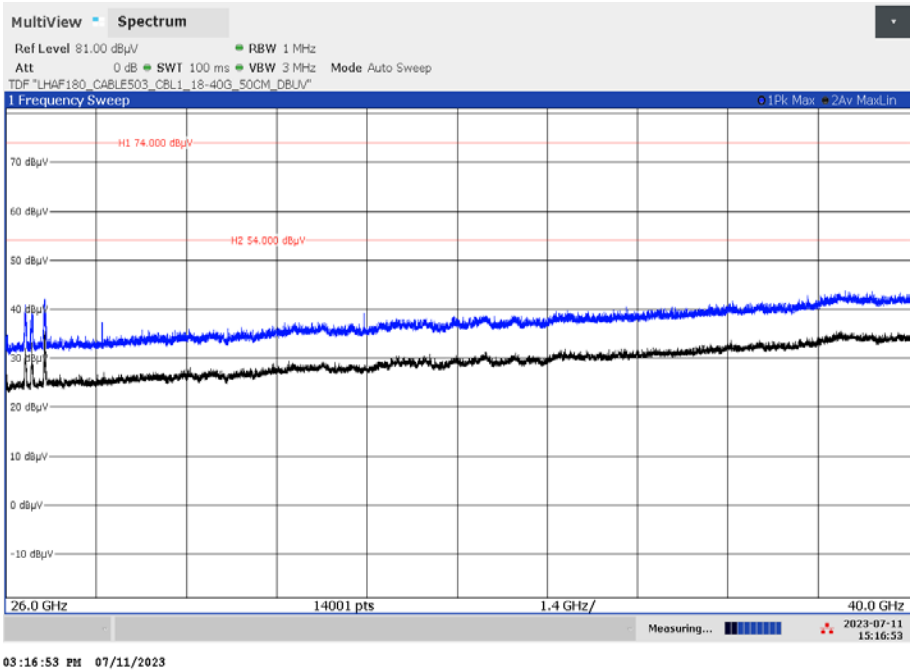

Plots: 40 MHz channel bandwidth

Plot 1: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

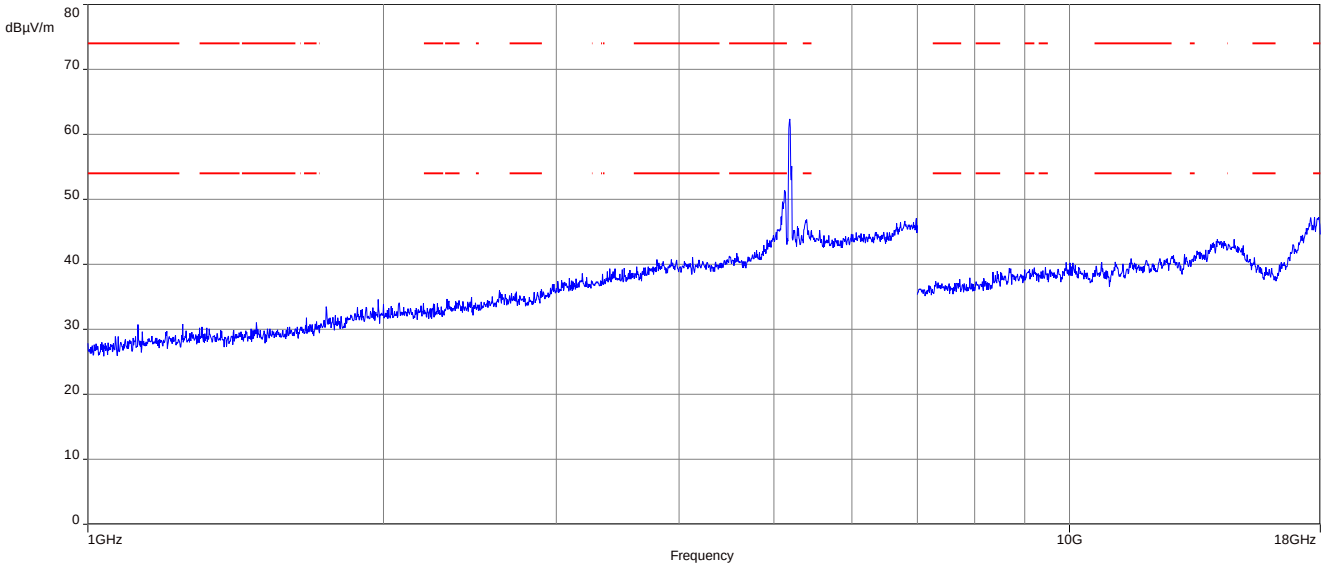

Plot 2: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel

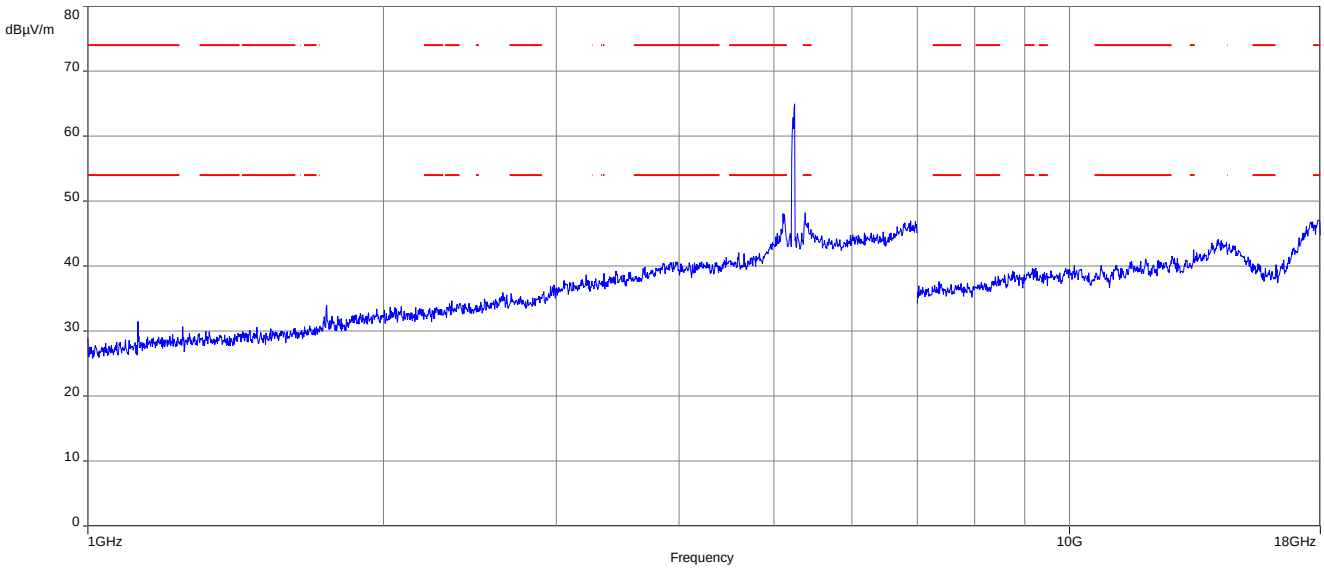

Plot 3: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; lowest channel

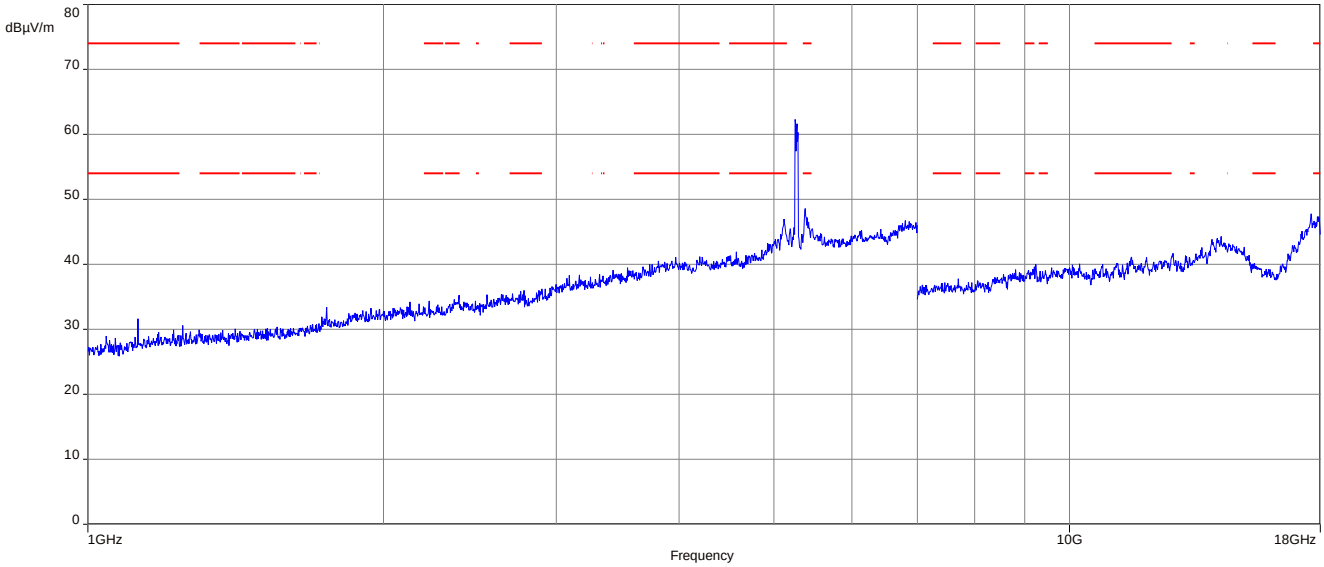

Plot 4: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; highest channel

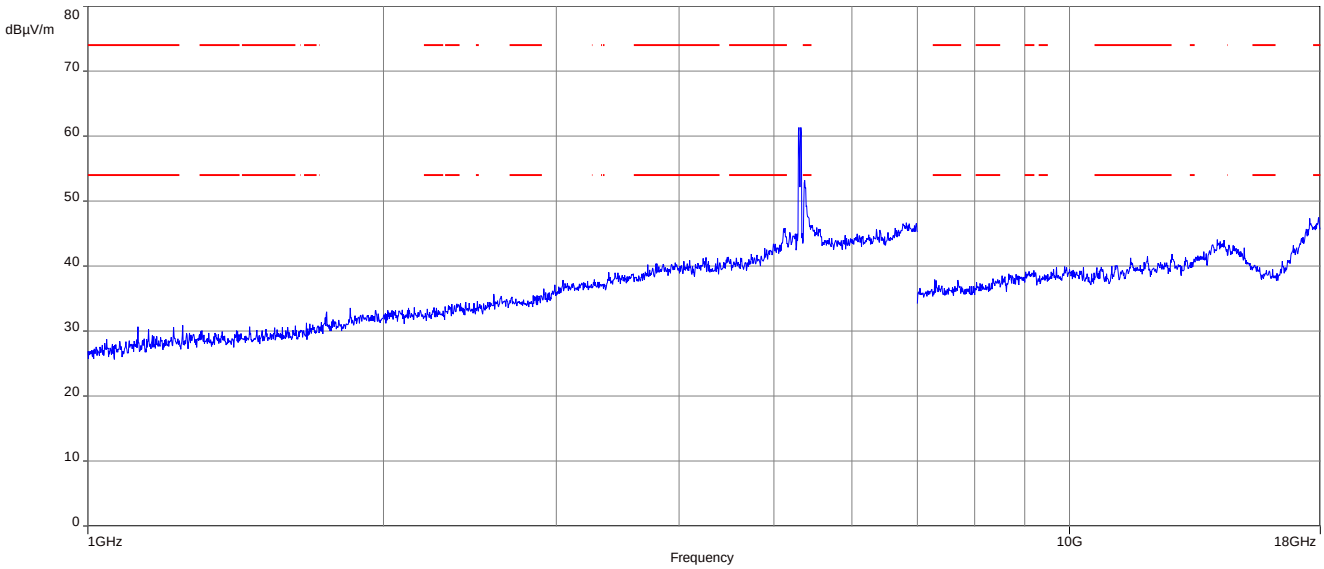

Plot 5: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

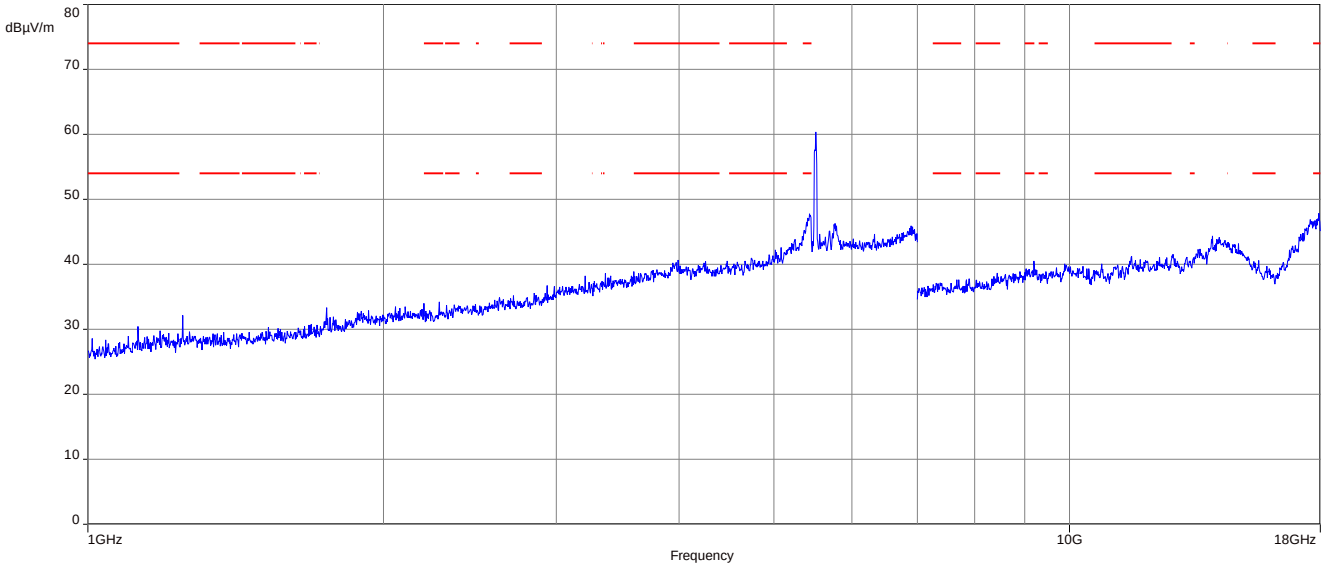

Plot 6: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel

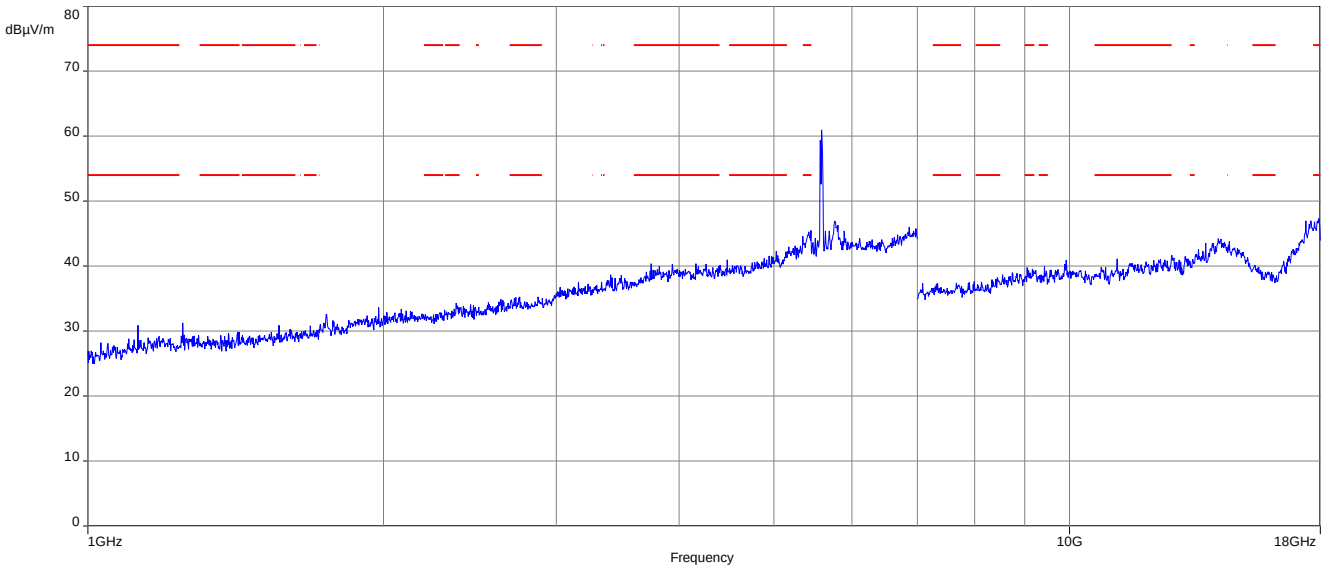

Plot 7: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

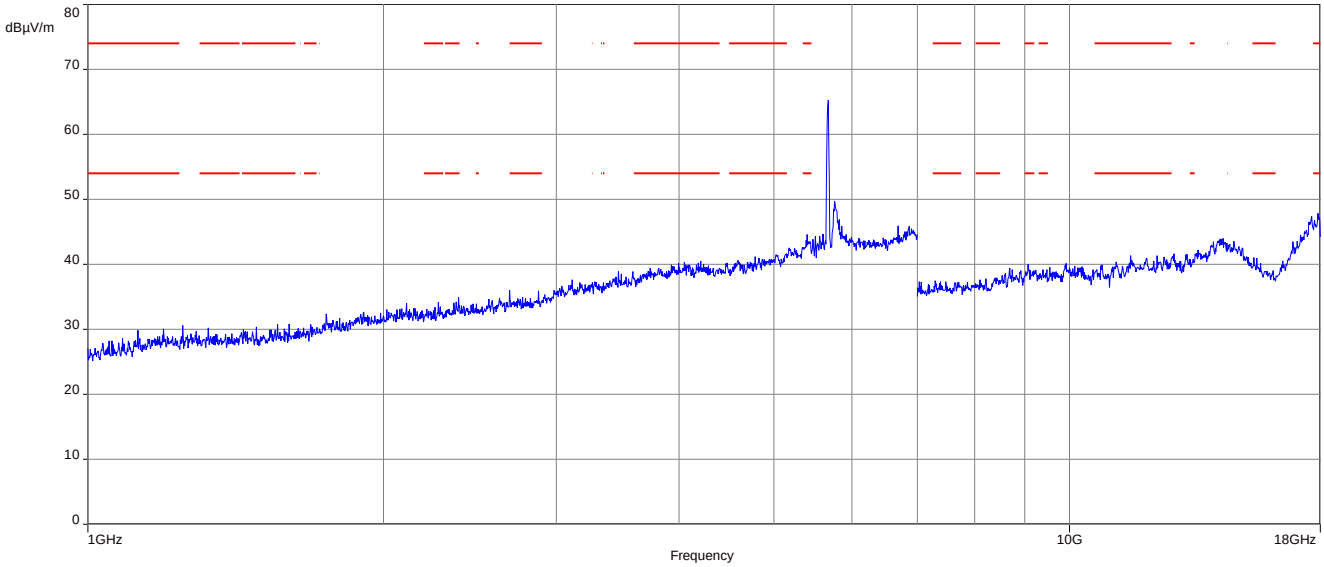

Plot 8: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

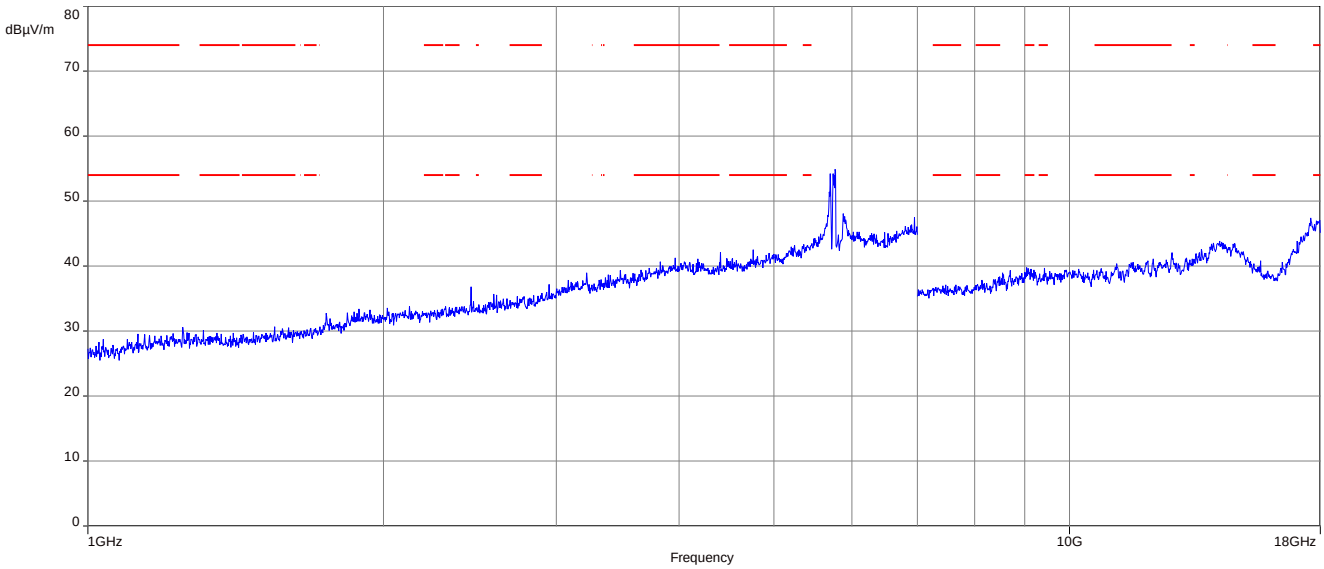

Plot 9: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel

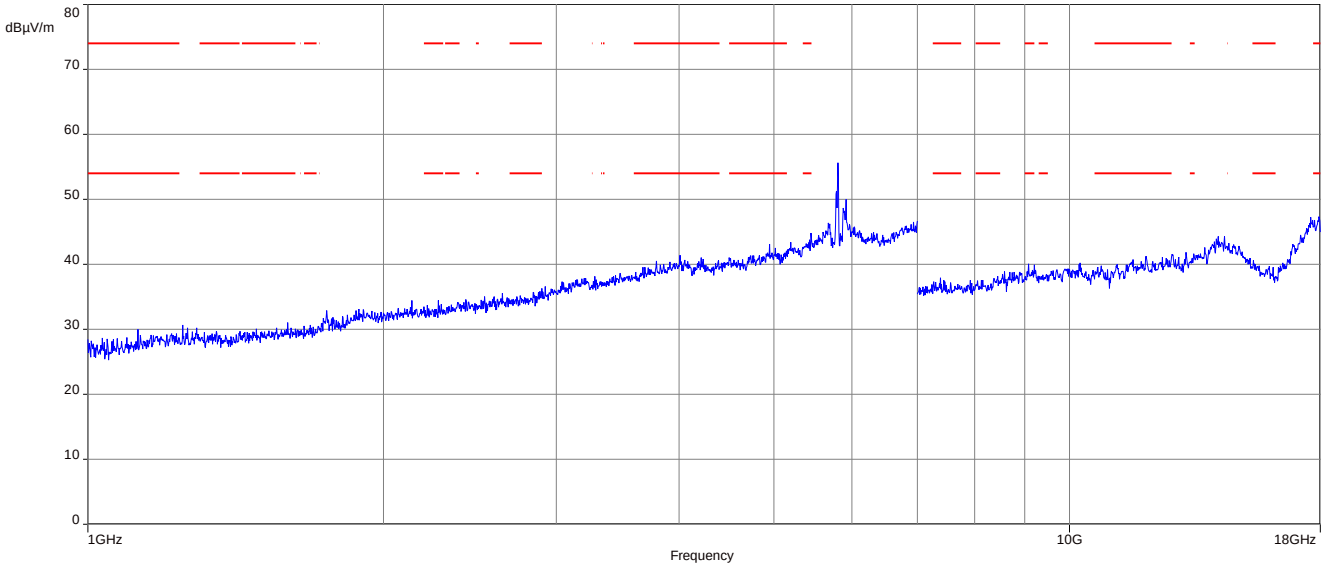

Plot 10: 18 GHz to 26 GHz; vertical & horizontal polarization; all channels

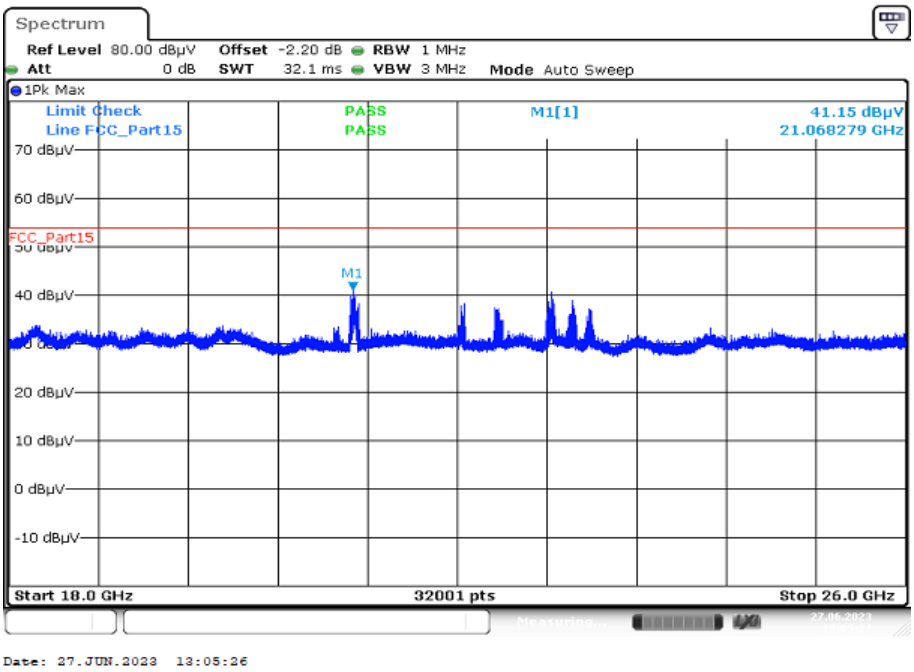

Plot 11: 26 GHz to 40 GHz; vertical & horizontal polarization; all channels

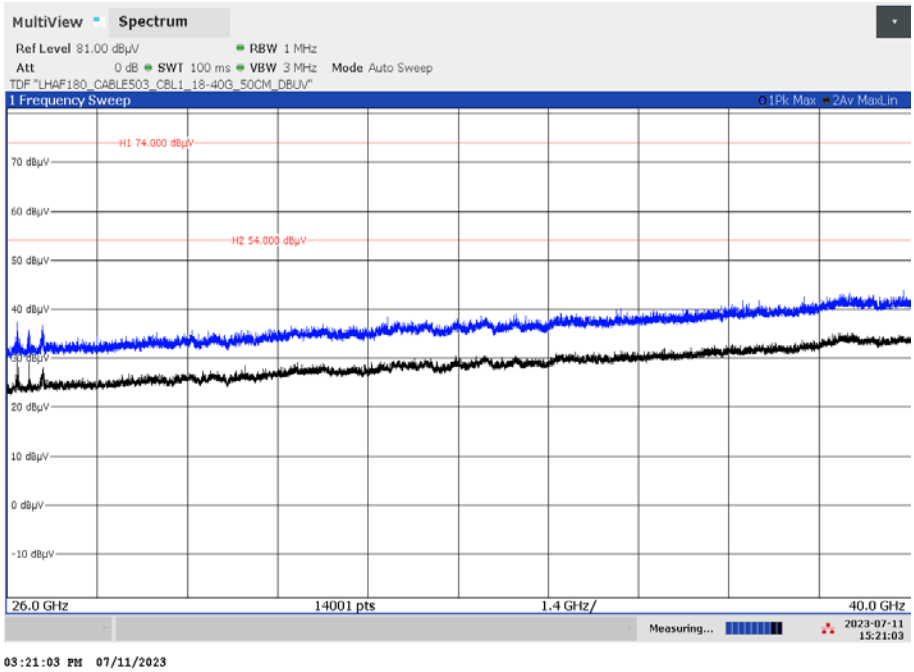

Plots: 80 MHz channel bandwidth

Plot 1: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; middle channel

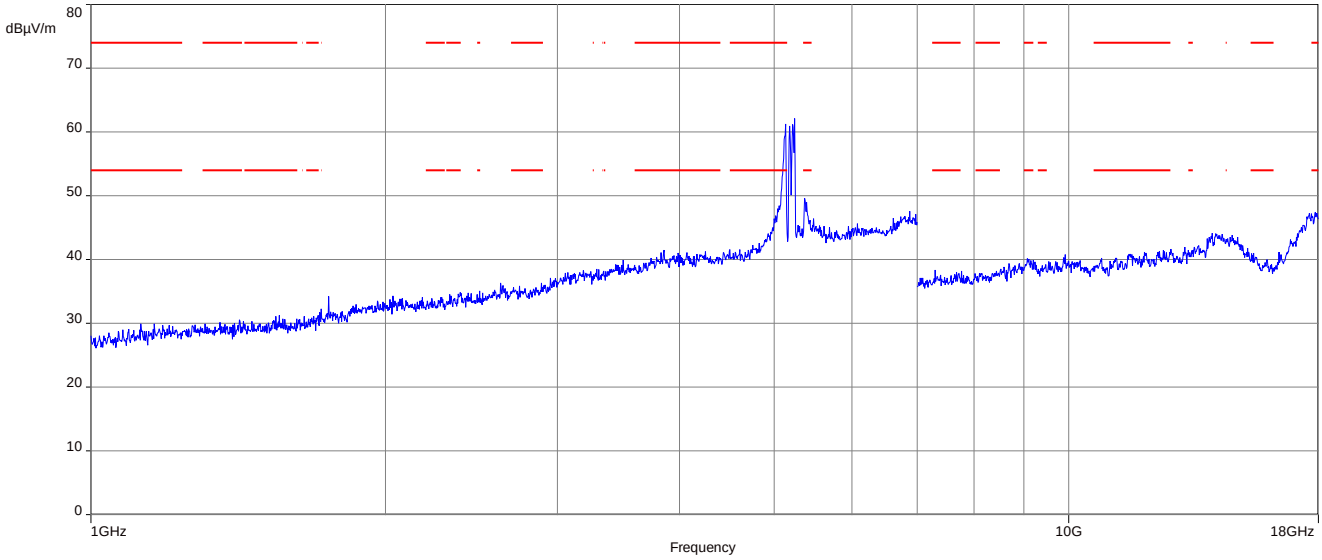

Plot 2: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; middle channel

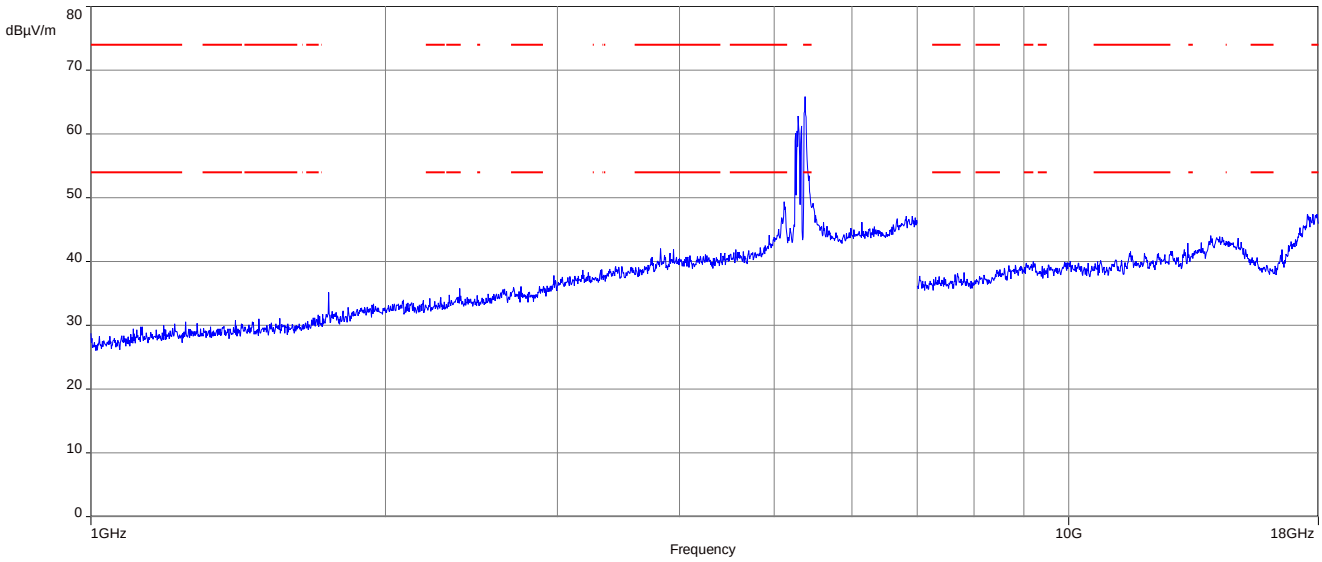

Plot 3: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

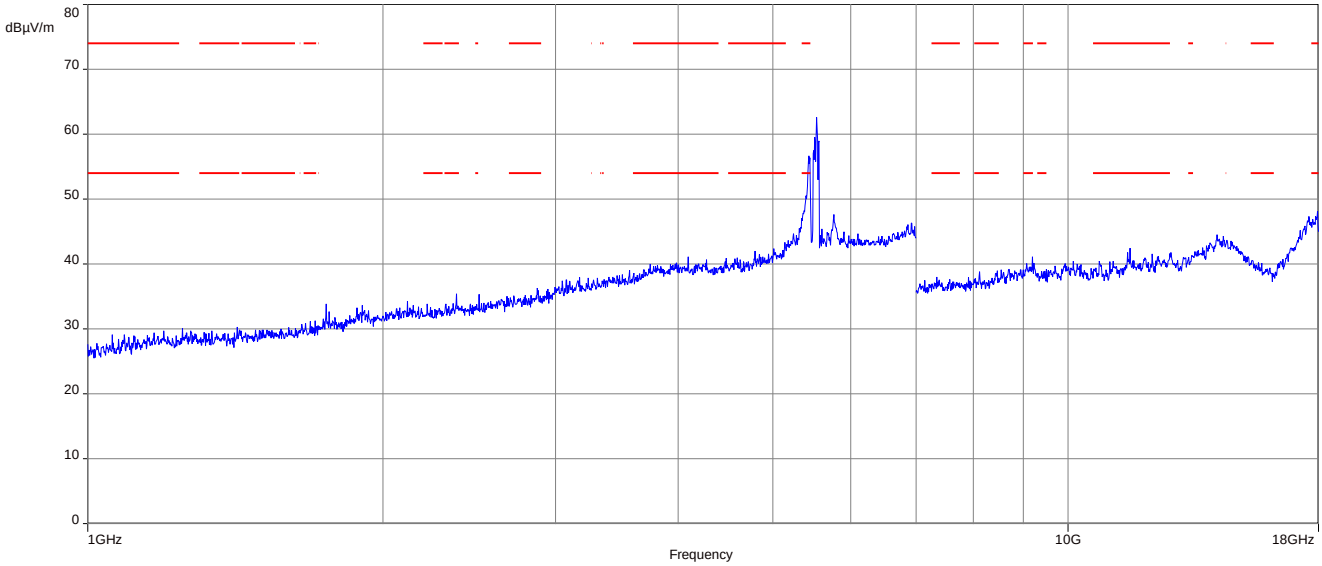

Plot 4: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel

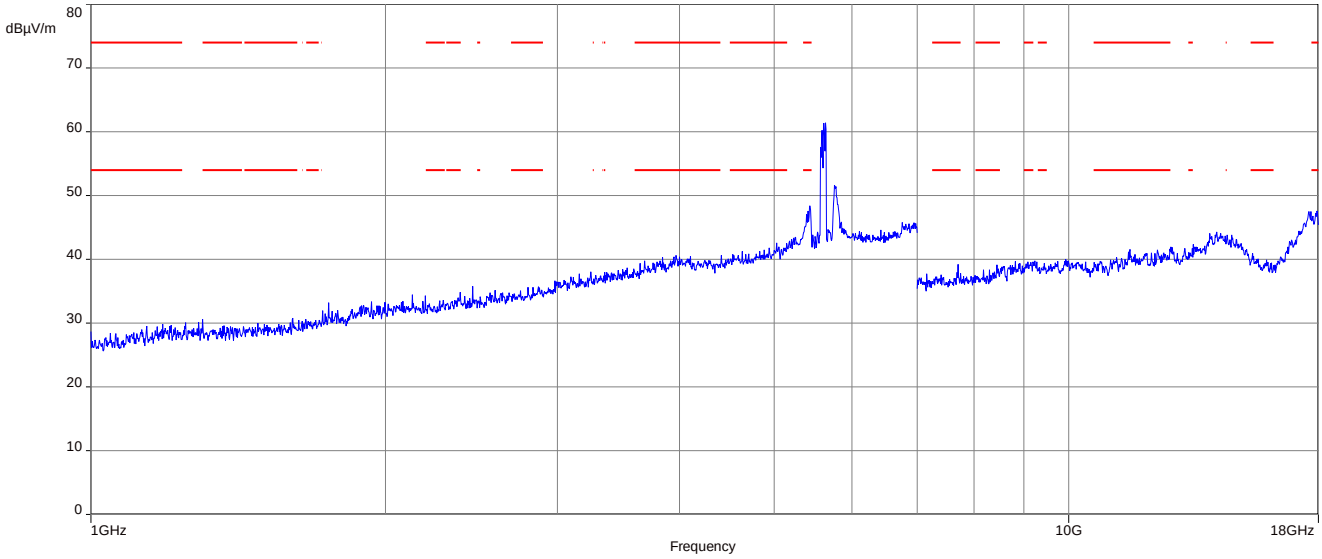

Plot 5: 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; middle channel

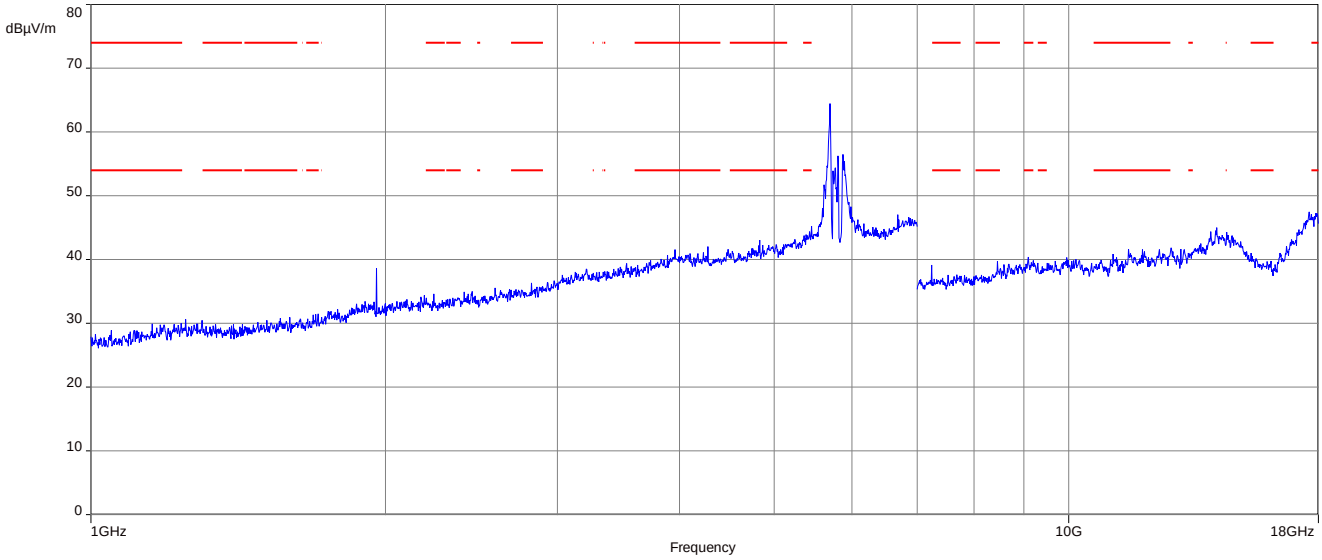

Plot 6: 18 GHz to 26 GHz; vertical & horizontal polarization; all channels

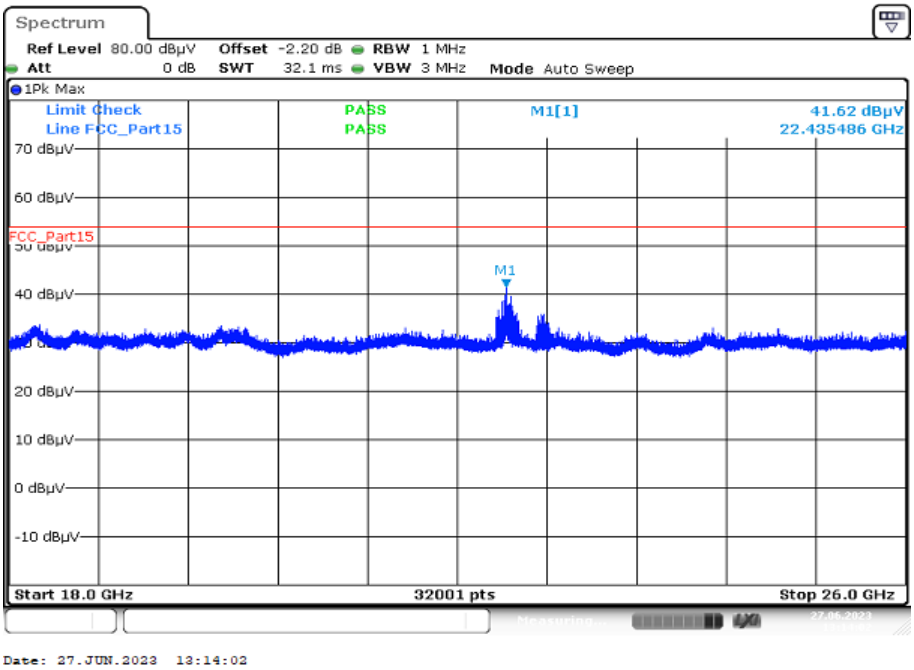

Plot 7: 26 GHz to 40 GHz; vertical & horizontal polarization; all channels

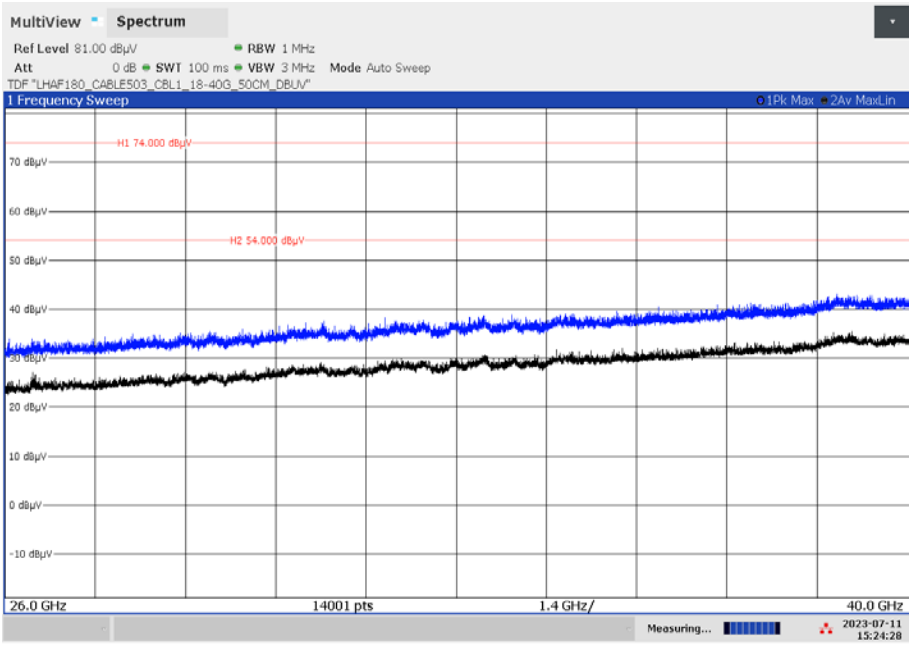

03:24:28 PM 07/11/2023

12.14 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel. If critical peaks are found the lowest channel and the highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	9 kHz
Resolution bandwidth:	100 kHz
Span:	150 kHz to 30 MHz
Trace mode:	Max Hold
Test setup:	See sub clause 6.4 – A
Measurement uncertainty:	See chapter 9

Limits:

Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	**Quasi-Peak (dBµV/m)**	**Average (dBµV/m)**
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency

Results:

Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	**Detector**	**Level [dBµV/m]**
All detected emissions are more than 20 dB below the limit.		

Plots:

Plot 1: 150 kHz to 30 MHz, phase line

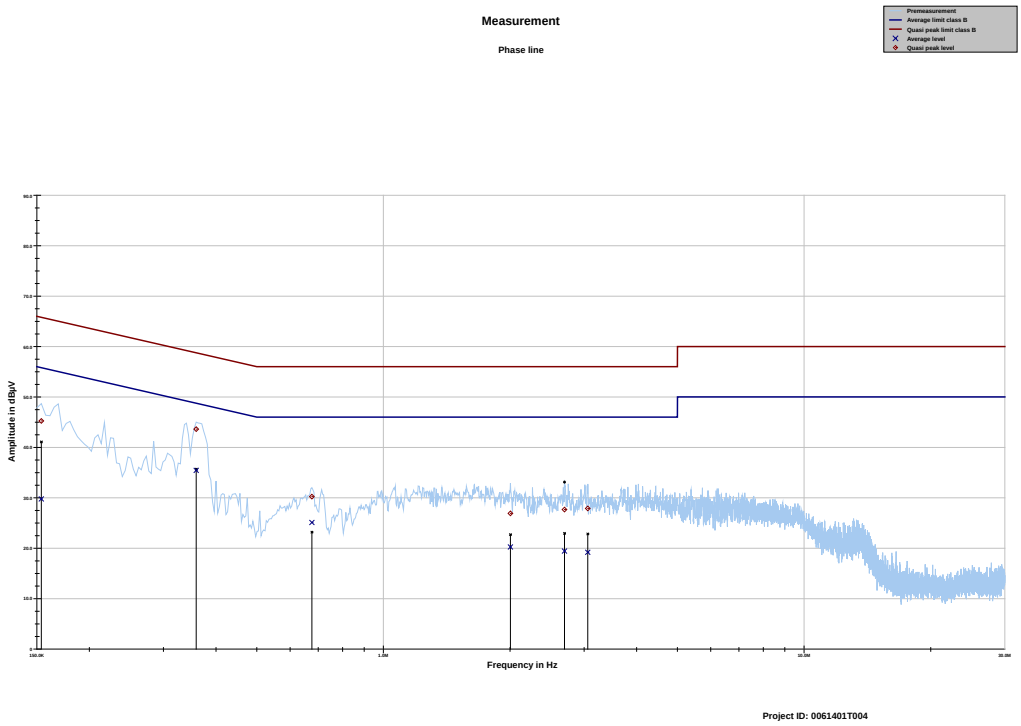

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.153731	45.25	20.55	65.796	29.78	26.12	55.893
0.358950	43.62	15.13	58.753	35.44	14.59	50.030
0.676106	30.23	25.77	56.000	25.10	20.90	46.000
2.004431	26.91	29.09	56.000	20.25	25.75	46.000
2.694713	27.67	28.33	56.000	19.43	26.57	46.000
3.060375	27.89	28.11	56.000	19.20	26.80	46.000

Plot 2: 150 kHz to 30 MHz, neutral line

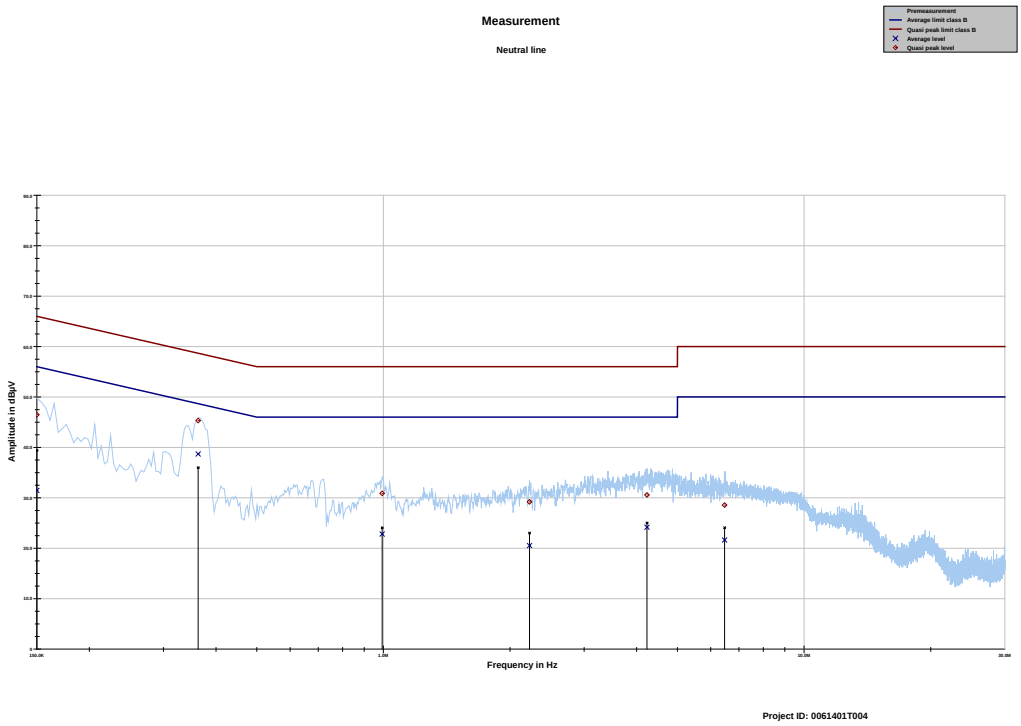

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.153731	45.25	20.55	65.796	29.78	26.12	55.893
0.358950	43.62	15.13	58.753	35.44	14.59	50.030
0.676106	30.23	25.77	56.000	25.10	20.90	46.000
2.004431	26.91	29.09	56.000	20.25	25.75	46.000
2.694713	27.67	28.33	56.000	19.43	26.57	46.000
3.060375	27.89	28.11	56.000	19.20	26.80	46.000

13 Observations

No observations except those reported with the single test cases have been made.

14 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing

15 Document history

Version	Applied changes	Date of release
-/-	Initial release	2023-08-17

16 Accreditation Certificate – D-PL-12076-01-05

first page	last page

DAkkS Deutsche Akkreditierungsstelle

Deutsche Akkreditierungsstelle GmbH

Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV
Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition

Accreditation

The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory

CTC advanced GmbH
Untertürkheimer Straße 6-10, 66117 Saarbrücken

is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:

Telecommunication (FCC Requirements)

The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.

Registration number of the certificate: **D-PL-12076-01-05**

Frankfurt am Main, 09.06.2020

by order Dipl.-Ing. (FH) Ralf Egner
Head of Division

The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH.
https://www.dakks.de/en/content/accredited-bodies-dakks

See notes overleaf.

Deutsche Akkreditierungsstelle GmbH

Office Berlin	Office Frankfurt am Main	Office Braunschweig
Spittelmarkt 10	Europa-Allee 52	Bundesallee 100
10117 Berlin	60327 Frankfurt am Main	38116 Braunschweig

The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.

No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.

The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.

The up-to-date state of membership can be retrieved from the following websites:
EA: www.european-accreditation.org
ILAC: www.ilac.org
IAF: www.iaf.nu

Note: The current certificate annex is published on the websites (link see below).

https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05e.pdf

or

https://cetecomadvanced.com/files/pdfs/d-pl-12076-01-05_tcb_usa.pdf

################################ END OF TEST REPORT ################################