
APPENDIX 2: SAR Measurement data

Appendix 2-1: Evaluation procedure

The SAR evaluation was performed with the following procedure:

- Step 1:** Measurement of the E-field at a fixed location above the central position of flat phantom was used as a reference value for assessing the power drop.
- Step 2:** The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and suitable horizontal grid spacing of EUT. Based on these data, the area of the maximum absorption was determined by splines interpolation.
- Step 3:** Around this point found in the Step 2 (area scan), a volume of more than or equal to 28mm(X axis)×28mm(Y axis)×24mm(Z axis) was assessed by measuring 8×8×7 (ratio step method (*1)) points (or more) for 3-6GHz frequency band.
Any additional peaks found in the Step2 which are within 2dB of limit are repeated with this Step3 (Zoom scan).
On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
- (1) The data at the surface were extrapolated, since the center of the dipoles is 1mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 2mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - (2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10×10×10) were interpolated to calculate the average.
 - (3) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- Step 4:** Re-measurement of the E-field at the same location as in Step 1 for the assessment of the power drift.
- Step 5:** Repeat Step 1-Step 4 with other condition or/and setup of EUT.

*1. Ratio step method parameters used; the first measurement point: "1.4mm" from the phantom surface, the initial grid separation: "1.4mm", subsequent graded grid ratio: "1.4". These parameters comply with the requirement of the KDB 865664 D01 and recommended by Schmid & Partner Engineering AG (DASY5 manual).

Appendix 2-2: SAR measurement data

Step 1: Changed channels and operation mode

Step 1-1 [Antenna #0(SISO)] Front (Patient side)&touch, 11a(6Mbps), 5180MHz(36ch)

EUT: X-ray imaging system with wireless LAN; Type: DR-ID 911SE; Serial: H121014

(RF module) Type: SX-PCEAN(FF); Serial: 4E3F15

Communication System: IEEE 802.11a(6Mbps, BPSK/OFDM); Frequency: 5180 MHz; Crest Factor: 1.0

Medium: MSL5800; Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 5.455 \text{ S/m}$; $\epsilon_r = 47.37$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Probe: EX3DV4 - SN3540; ConvF(4.16, 4.16, 4.16); Calibrated: 2012/07/19;
-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 136.0$ -Electronics: DAE4 Sn518; Calibrated: 2012/10/17
-Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
-DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

911se,body(patient)-touch/m52-1,ant0:frt(patient)&touch(d0mm),11a(6m),m5180/

Area Scan:90x100,10 (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 0.735 W/kg

Area Scan:90x100,10 (91x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$; Maximum value of SAR (interpolated) = 0.753 W/kg

Z Scan:135,5 (1x1x28): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$; Maximum value of SAR (measured) = 0.902 W/kg


Fast SAR(*Polynomial): SAR(1 g) = 0.230 mW/g;

Zoom:xy28/z24,ratio1.4 (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$;

Reference Value = 14.330 V/m; Power Drift = -0.20 dB, Maximum value of SAR (measured) = 0.894 W/kg

Peak SAR (extrapolated) = 1.736 mW/g

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.083 mW/g

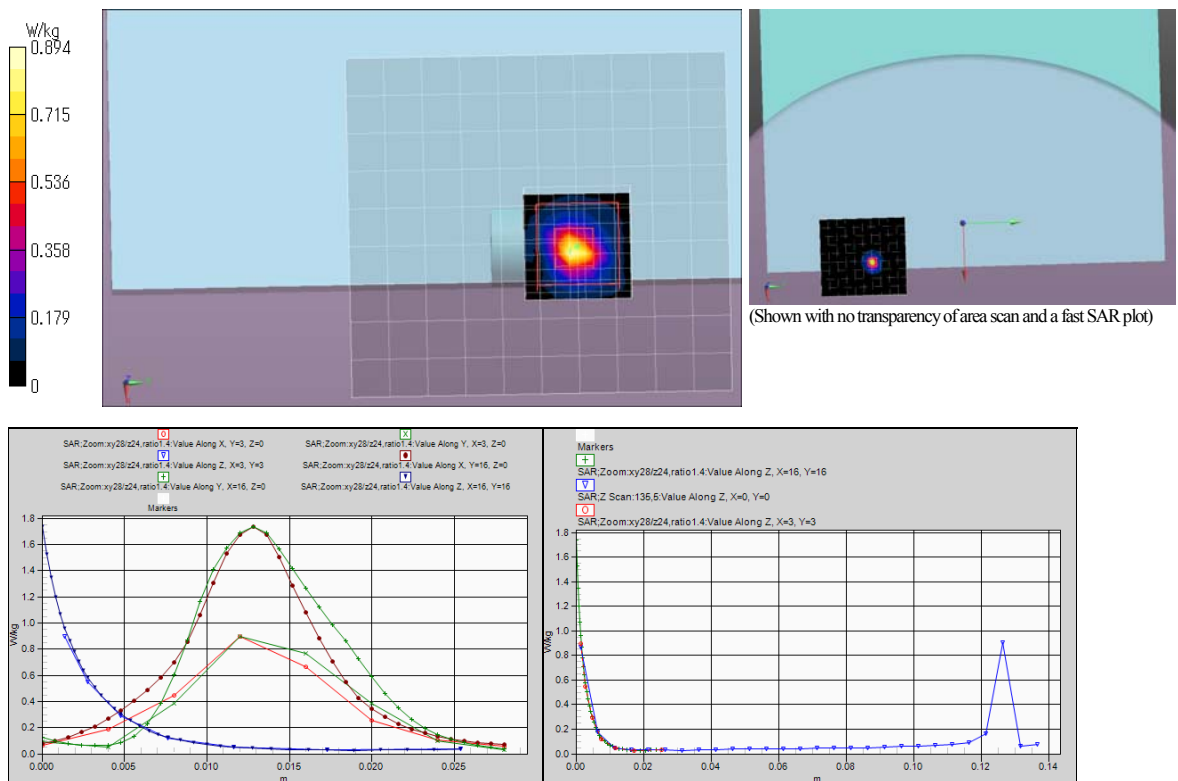

Remarks: * Date tested: 2013/07/05; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 129mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5 deg.C. / $\pm 1 \text{ deg.C.}$ / $50 \pm 5 \% \text{RH}$,
* liquid temperature: 23.9(start)/23.8(end)/24.2(in check) deg.C. ; * White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: SAR measurement data (cont'd)

Step 1: Changed channels and operation mode (cont'd)

Step 1-2 [Antenna #1(SISO)] Front (Patient side)&touch, 11a(6Mbps), 5180MHz(36ch)

EUT: X-ray imaging system with wireless LAN; Type: DR-ID 911SE; Serial: H121014

(RF module) Type: SX-PCEAN(FF); Serial: 4E3F15

Communication System: IEEE 802.11a(6Mbps, BPSK/OFDM); Frequency: 5180 MHz; Crest Factor: 1.0

Medium: MSL5800; Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 5.455 \text{ S/m}$; $\epsilon_r = 47.37$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Probe: EX3DV4 - SN3540; ConvF(4.16, 4.16, 4.16); Calibrated: 2012/07/19;
-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 136.0$ -Electronics: DAE4 Sn518; Calibrated: 2012/10/17
-Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
-DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

911se,body(patient)-touch/m52-2,ant1:frt(patient)&touch(d0mm),11a(6m),m5180/

Area Scan:90x100,10 (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 0.285 W/kg

Area Scan:90x100,10 (91x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$; Maximum value of SAR (interpolated) = 0.298 W/kg

Z Scan:135,5 (1x1x28): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$; Maximum value of SAR (measured) = 0.977 W/kg



Fast SAR(*.Polynomial): SAR(1 g) = 0.091 mW/g;

Zoom:xy28/z24, ratio1.4 (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$;

Reference Value = 9.732 V/m; Power Drift = 0.20 dB, Maximum value of SAR (measured) = 0.781 W/kg

Peak SAR (extrapolated) = 1.961 mW/g

SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.054 mW/g

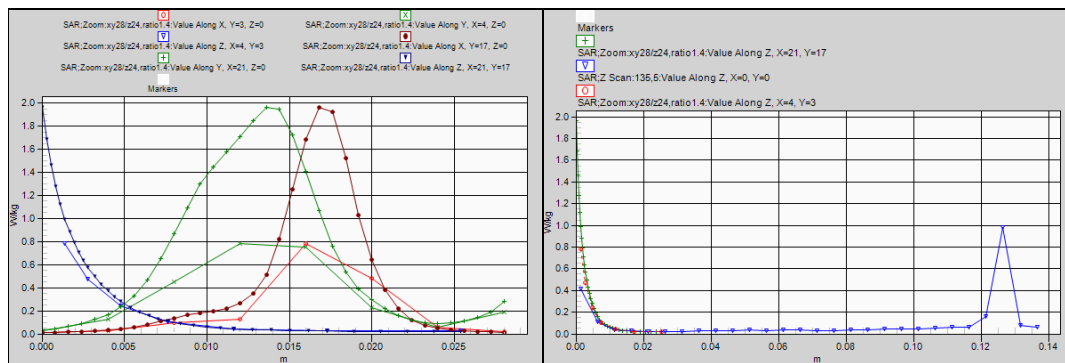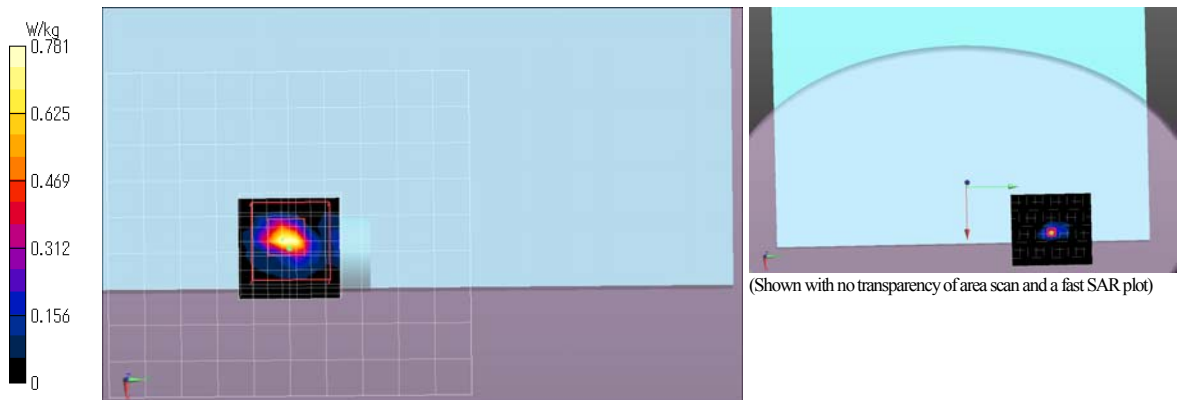

Remarks: * Date tested: 2013/07/05; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 129mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5 deg.C. $\pm 1 \text{ deg.C.} / 50 \pm 5 \% \text{RH}$,
* liquid temperature: 23.8(start)/23.8(end)/24.2(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g)small=SAR(1g)

Appendix 2-2: SAR measurement data (cont'd)

Step 1: Changed channels and operation mode (cont'd)

Step 1-3 [Antenna #0(SISO)] Front (Patient side)&touch, 11a(6Mbps), 5240MHz(48ch)

EUT: X-ray imaging system with wireless LAN; Type: DR-ID 911SE; Serial: H121014

(RF module) Type: SX-PCEAN(FF); Serial: 4E3F15

Communication System: IEEE 802.11a(6Mbps, BPSK/OFDM); Frequency: 5240 MHz; Crest Factor: 1.0

Medium: MSL5800; Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 5.53 \text{ S/m}$; $\epsilon_r = 47.35$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Probe: EX3DV4 - SN3540; ConvF(4.16, 4.16, 4.16); Calibrated: 2012/07/19;
-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$ -Electronics: DAE4 Sn518; Calibrated: 2012/10/17
-Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
-DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

911se,body(patient)-touch/m52-4,ant0:frt(patient)&touch(d0mm),11a(6m),m5240/

Area Scan:90x100,10 (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 0.446 W/kg

Area Scan:90x100,10 (91x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$; Maximum value of SAR (interpolated) = 0.526 W/kg


Fast SAR: SAR(1 g) = 0.161 mW/g;

Zoom:xy28/z24, ratio1.4 (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$;


Reference Value = 12.596 V/m; Power Drift = 0.05 dB; Maximum value of SAR (measured) = 0.760 W/kg

Peak SAR (extrapolated) = 1.440 mW/g

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.077 mW/g

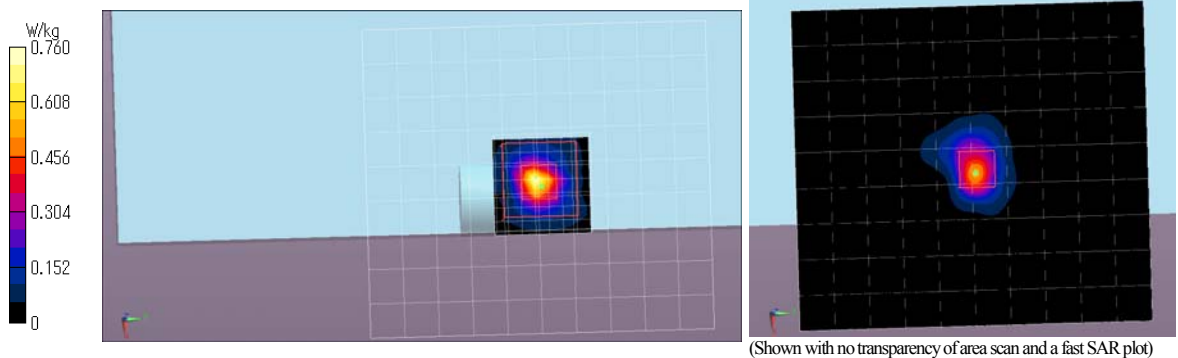

(Shown with no transparency of area scan and a fast SAR plot)

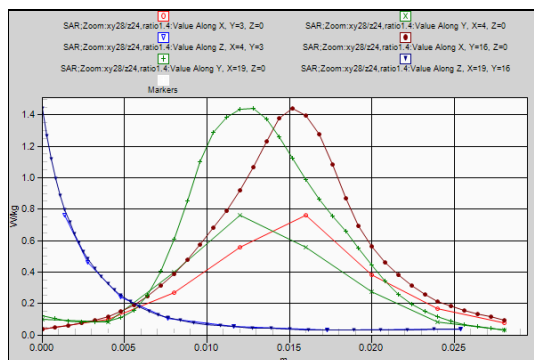

Remarks: * Date tested: 2013/07/05; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 129mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5 deg.C. $\pm 1 \text{ deg.C.} / 50 \pm 5 \% \text{RH}$,
* liquid temperature: 23.8(start)23.8(end)24.2(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: SAR measurement data (cont'd)

Step 1: Changed channels and operation mode (cont'd)

Step 1-4 [Antenna #1(SISO)] Front (Patient side)&touch, 11a(6Mbps), 5240MHz(48ch)

EUT: X-ray imaging system with wireless LAN; Type: DR-ID 911SE; Serial: H121014

(RF module) Type: SX-PCEAN(FF); Serial: 4E3F15

Communication System: IEEE 802.11a(6Mbps, BPSK/OFDM); Frequency: 5240 MHz; Crest Factor: 1.0

Medium: MSL5800; Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 5.53 \text{ S/m}$; $\epsilon_r = 47.35$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Probe: EX3DV4 - SN3540; ConvF(4.16, 4.16, 4.16); Calibrated: 2012/07/19;
-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$ -Electronics: DAE4 Sn518; Calibrated: 2012/10/17
-Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
-DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

911se,body(patient)-touch/m52-5,ant1:frt(patient)&touch(d0mm),11a(6m),m5240/

Area Scan:90x100,10 (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 0.271 W/kg

Area Scan:90x100,10 (91x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$; Maximum value of SAR (interpolated) = 0.286 W/kg


Fast SAR: SAR(1 g) = 0.073 mW/g;

Zoom:xy28/z24, ratio1.4 (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$;


Reference Value = 8.978 V/m; Power Drift = -0.19 dB; Maximum value of SAR (measured) = 0.379 W/kg

Peak SAR (extrapolated) = 0.783 mW/g

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.036 mW/g

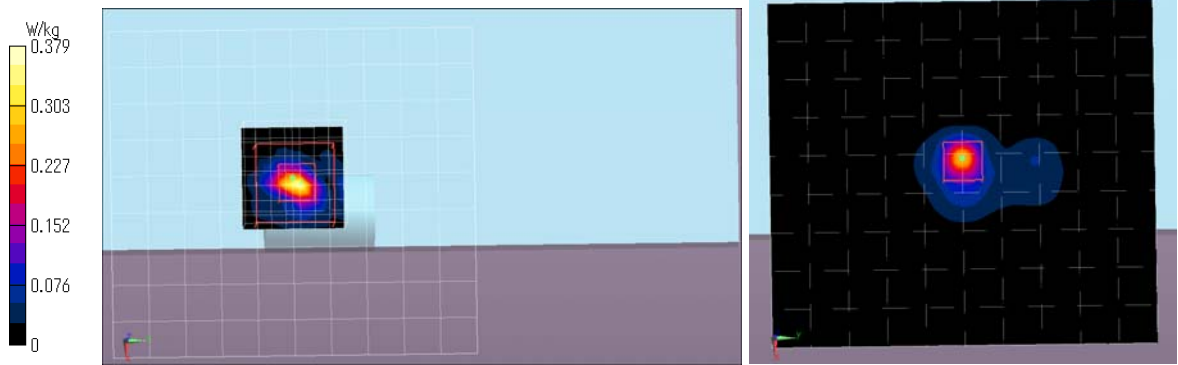

(Shown with no transparency of area scan and a fast SAR plot)

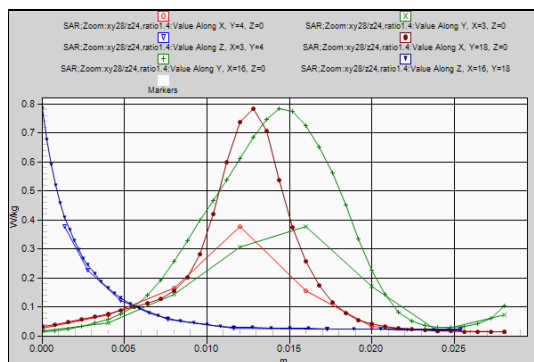

Remarks: *. Date tested: 2013/07/05; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
*. liquid depth: 129mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5 deg.C. $\pm 1 \text{ deg.C.}$ / $50 \pm 5 \% \text{RH}$,
*. liquid temperature: 23.8(start)/23.8(end)/24.2(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: SAR measurement data (cont'd)

Step 1: Changed channels and operation mode (cont'd)

Step 1-4 [Antenna #0+#1(MIMO)] Front (Patient side)&touch, 11n(40HT)(MCS8), 5230MHz(46ch)

EUT: X-ray imaging system with wireless LAN; Type: DR-ID 911SE; Serial: H121014

(RF module) Type: SX-PCEAN(FF); Serial: 4E3F15

Communication System: IEEE 802.11n(40HT)(MCS8, BPSK/OFDM); Frequency: 5230 MHz, Crest Factor: 1.0

Medium: MSL5800; Medium parameters used: $f = 5230$ MHz; $\sigma = 5.501$ S/m; $\epsilon_r = 47.33$; $\rho = 1000$ kg/m³

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Probe: EX3DV4 - SN3540; ConvF(4.16, 4.16, 4.16); Calibrated: 2012/07/19; -DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)
-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$ -Electronics: DAE4 Sn518; Calibrated: 2012/10/17
-Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

(Ant#0)911se,body(patient)-touch/m52-3,ant0+1(mimo):frt(patient)&touch(d0mm),n40(ht8),m5230/

Area Scan(ant0):90x100,10 (10x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 0.469 W/kg

Area Scan(ant0):90x100,10 (91x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 0.485 W/kg

Fast SAR: SAR(1 g) = 0.149 mW/g;

Zoom(ant#0):xy28/z24,ratio1.4 (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 11.273 V/m; Power Drift = -0.08 dB, Maximum value of SAR (measured) = 0.579 W/kg

Peak SAR (extrapolated) = 1.112 mW/g

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.064 mW/g

(Ant#1) 911se,body(patient)-touch/m52-3,ant0+1(mimo):frt(patient)&touch(d0mm),n40(ht8),m5230/

Area Scan(ant1):90x100,10 (10x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 0.125 W/kg

Area Scan(ant1):90x100,10 (91x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 0.130 W/kg



Fast SAR: SAR(1 g) = 0.041 mW/g;

Zoom(ant#1):xy28/z24,ratio1.4 (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 11.273 V/m; Power Drift = -0.08 dB, Maximum value of SAR (measured) = 0.298 W/kg

Peak SAR (extrapolated) = 0.736 mW/g

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.032 mW/g

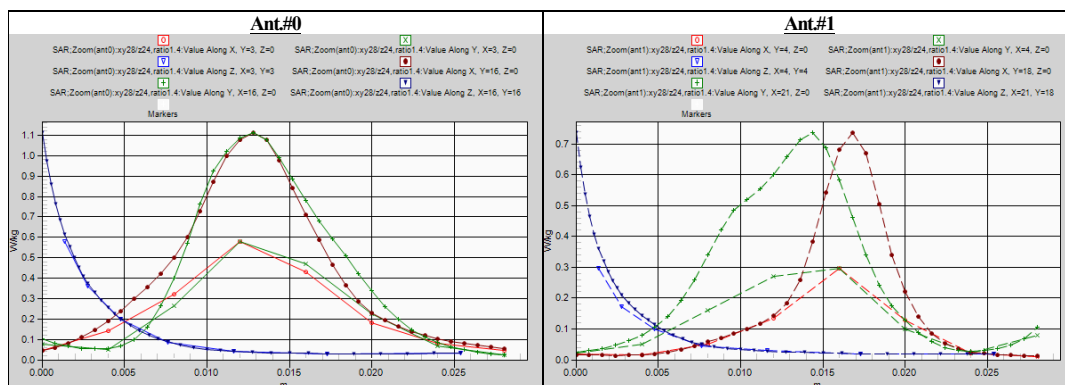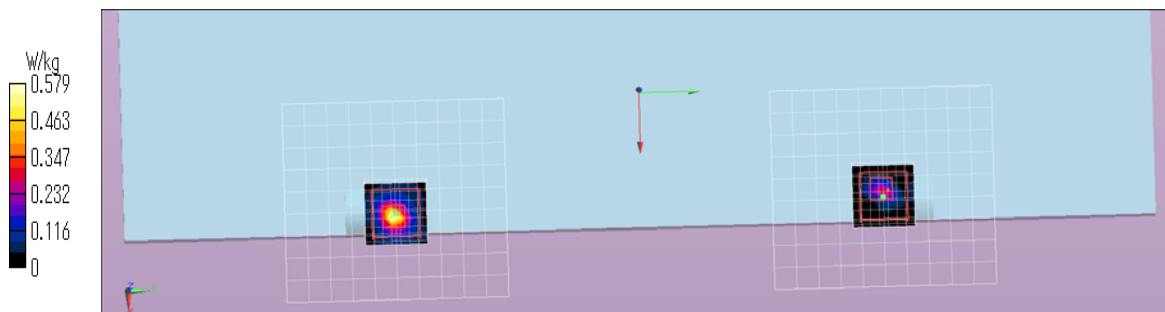

Remarks: * Date tested: 2013/07/05; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 129mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5 deg.C. $\pm$ 1 deg.C. / 50 $\pm$ 5 %RH,
* liquid temperature: 23.8(start)/23.8(end)/24.2(in check) deg.C. ; * White cubic: zoom scan area, Red cubic: big= SAR(10g) / small= SAR(1g)

APPENDIX 3: Test instruments

Appendix 3-1: Equipment used

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
COTS-SSAR-02	DASY52	Schmid&Partner Engineering AG	DASY52 V8.2 B969	-	SAR	-
COTS-KSEP-01	Dielectric measurement	Agilent	85070	1	SAR	-
SSAR-02	SAR measurement system	Schmid&Partner Engineering AG	DASY5	1324	SAR	Pre Check
SSRBT-02	SAR robot	Schmid&Partner Engineering AG	TX60 Lspeag	F12/5L2QA1/A/01	SAR	2012/09/24 * 12
KDAE-R01	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	518	SAR	2012/10/18 * 12
KPB-R02	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3540	SAR	2012/07/19 * 12
KSDA-02	Dipole Antenna	Schmid&Partner Engineering AG	D5GHzV2	1070	SAR(daily)	2013/03/14 * 12
KPFL-01	Flat Phantom	Schmid&Partner Engineering AG	Oval flat phantom ELI 4.0	1059	SAR	2012/10/31 * 12
SSNA-01	Network Analyzer	Agilent	8753ES	US39171777	SAR	2012/12/29 * 12
KEPP-01	Dielectric probe	Agilent	85070E/8710-2036	2540	SAR	2013/03/05 * 12
SSG-03	Signal Generator	Agilent	N5181A	MY48181119	SAR(daily)	2013/01/30 * 12
KPA-12	RF Power Amplifier	MILMEGA	AS2560-50	1018582	SAR(daily)	Pre Check
KCPL-07	Directional Coupler	Pulsar Microwave Corp.	CCS30-B26	0621	SAR(daily)	Pre Check
KPM-06	Power Meter	Rohde & Schwarz	NRVD	101599	SAR(daily)	2012/09/13 * 12
KIU-08	Power sensor	Rohde & Schwarz	NRV-Z4	100372	SAR(daily)	2012/09/13 * 12
KIU-09	Power sensor	Rohde & Schwarz	NRV-Z4	100371	SAR(daily)	2012/09/13 * 12
KAT10-P1	Attenuator	Weinschel	24-10-34	BY5927	SAR(daily)	2013/02/27 * 12
KPM-05	Power meter	Agilent	E4417A	GB41290718	SAR(daily)	2013/04/18 * 12
KPSS-01	Power sensor	Agilent	E9327A	US40440544	SAR(daily)	2013/04/18 * 12
SAT20-SAR1	Attenuator	TME	SFA-01AXPJ-20	-	SAR(daily)	2013/04/05 * 12
KRU-01	Ruler(300mm)	Shinwa	13134	-	SAR(daily)	2013/03/25 * 12
KRU-02	Ruler(150mm,L)	Shinwa	12103	-	SAR	2013/03/25 * 12
KRU-04	Ruler(300mm)	Shinwa	13134	-	SAR(daily)	2013/05/27 * 12
KRU-05	Ruler(100x50mm,L)	Shinwa	12101	-	SAR	2013/05/27 * 12
KOS-13	Digital thermometer	HANNA	Checktemp-2	KOS-13	SAR	2013/01/31 * 12
KOS-14	Thermo-Hygrometer data logger	SATO KEIRYOKI	SK-L200THII α / SK-LTHII α-2	015246/08169	SAR	2013/01/31 * 12
SOS-11	Humidity Indicator	A&D	AD-5681	4063424	SAR	2013/02/27 * 12
SSA-04	Spectrum Analyzer	Advantest	R3272	101100994	SAR(moni.)	2012/12/17 * 12
KPM-08	Power meter	Anritsu	ML2495A	6K00003356	Ant.pwr	2012/09/14 * 12
KPSS-04	Power sensor	Anritsu	MA2411B	012088	Ant.pwr	2012/09/14 * 12
KAT10-S3	Attenuator	Agilent	8490D 010	50924	Ant.pwr	2013/02/19 * 12
KCC-D22	Microwave Cable	Hirose Electric	U.FL-2LP-066J1-A-(200)	-	Ant.pwr	Pre Check
KCC-D23	Microwave cable	Hirose Electric	U.FL-2LP-066J1-A-(200)	-	Ant.pwr	Pre Check
KTM-G1	Terminator	Hirose Electric	HRM-TMP-05(40)	-	Ant.pwr	-
KSA-08	Spectrum Analyzer	Agilent	E4446A	MY46180525	Ant.pwr	2013/03/04 * 12
SWTR-03	DI water	MonotaRo	34557433	-	SAR(daily)	Pre Check
KSLM580-02	Tissue simulation liquid (5800MHz,body)	Schmid&Partner Engineering AG	SL AAM 501 AB	110520-3	SAR	Daily check) Target value ±5%
No.7 Shielded room	SAR shielded room (2.76m(W)x3.76m(D)x2.4m(H))	TDK	-	-	SAR	(Daily check) Ambient noise: < 12mW/kg


The expiration date of calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations. All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

[Test Item] SAR: Specific Absorption Rate, Ant.pwr: Antenna terminal conducted power

Appendix 3-2: Configuration and peripherals

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot, which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probes EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

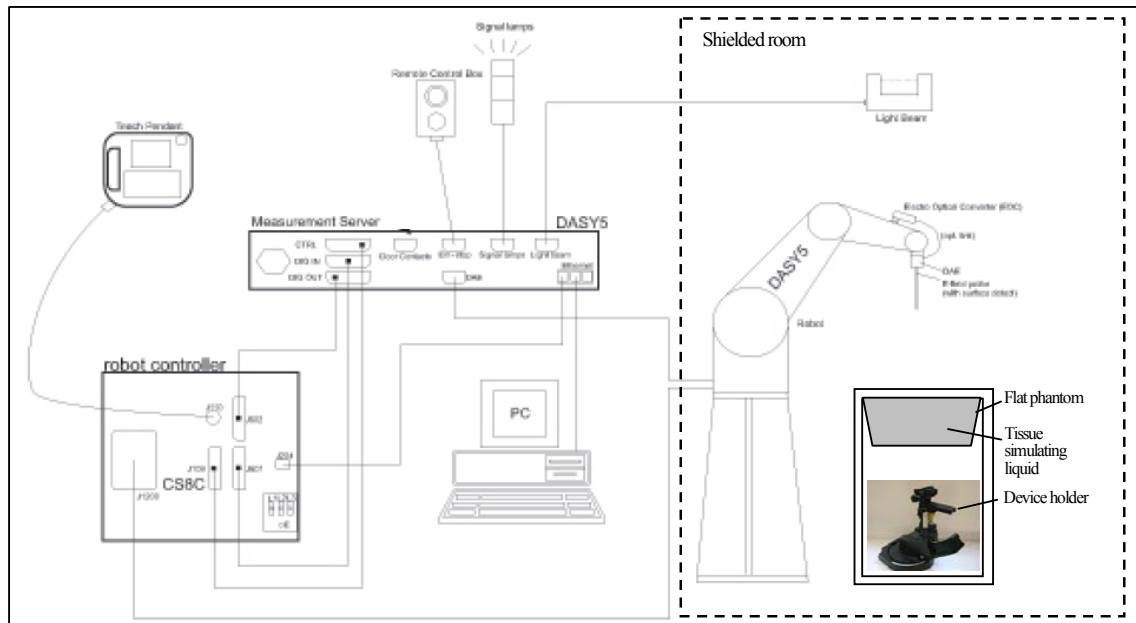

The DASY5 system for performing compliance tests consist of the following items:

1	A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software.
2	An arm extension for accommodating the data acquisition electronics (DAE).
3	An isotropic field probe optimized and calibrated for the targeted measurement.
4	A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
5	The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
6	The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
7	The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
8	A computer running Win7 professional operating system and the DASY5 software.
9	R Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
10	The phantom.
11	The device holder for EUT. (low-loss dielectric palette) (*. when it was used.)
12	Tissue simulating liquid mixed according to the given recipes.
13	Validation dipole kits allowing to validate the proper functioning of the system.

Appendix 3-3: Test system specification

TX60 Lsepag robot/CS8Csepag-TX60 robot controller

- Number of Axes : 6
- Repeatability : $\pm 0.02\text{mm}$
- Manufacture : Stäubli Unimation Corp.

DASY5 Measurement server

- Features : The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.
- Calibration : No calibration required.
- Manufacture : Schmid & Partner Engineering AG

Data Acquisition Electronic (DAE)

- Features : Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY5 embedded system (fully remote controlled). 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
- Measurement Range : $1\mu\text{V}$ to $> 200\text{mV}$ (16bit resolution and 2 range settings: 4mV, 400mV)
- Input Offset voltage : $< 1\mu\text{V}$ (with auto zero)
- Input Resistance : $200\text{M}\Omega$
- Battery Power : $> 10\text{hr}$ of operation (with two 9V battery)
- Manufacture : Schmid & Partner Engineering AG

Electro-Optical Converter (EOC61)

- Manufacture : Schmid & Partner Engineering AG

Light Beam Switch (LB5/80)

- Manufacture : Schmid & Partner Engineering AG

SAR measurement software

- Item : Dosimetric Assessment System DASY5
- Software version : DASY52, V8.2 B969
- Manufacture : Schmid & Partner Engineering AG

E-Field Probe



- Model : EX3DV4 (serial number: 3540)
- Construction : Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).
- Frequency : 10MHz to 6GHz, Linearity: $\pm 0.2\text{ dB}$ (30MHz to 6GHz)
- Conversion Factors : 750, 835, 900, 1750, 1810, 1900, 2000, 2450, 2600, 5300, 5500, 5600, 5800MHz (Head and Body)
- Directivity : $\pm 0.3\text{ dB}$ in HSL (rotation around probe axis)
 $\pm 0.5\text{ dB}$ in tissue material (rotation normal to probe axis)
- Dynamic Range : $10\mu\text{W/g}$ to $> 100\text{ mW/g}$; Linearity: $\pm 0.2\text{ dB}$ (noise: typically $< 1\mu\text{W/g}$)
- Dimension : Overall length: 330mm (Tip: 20mm)
Tip diameter: 2.5mm (Body: 12mm)
Typical distance from probe tip to dipole centers: 1mm
- Application : High precision dosimetric measurement in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6GHz with precision of better 30%.
- Manufacture : Schmid & Partner Engineering AG

Phantom

- Type : ELI 4.0 oval flat phantom
- Shell Material : Fiberglass
- Shell Thickness : Bottom plate: $2 \pm 0.2\text{mm}$
- Dimensions : Bottom elliptical: 600×400mm, Depth: 190mm (Volume: Approx. 30 liters)
- Manufacture : Schmid & Partner Engineering AG

Device Holder

- ☒ Urethane foam
- ☐ KSDH-01: In combination with the ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Transmitter devices can be easily and accurately positioned. The low-loss dielectric urethane foam was used for the mounting section of device holder.
- Material : POM
- Manufacture : Schmid & Partner Engineering AG

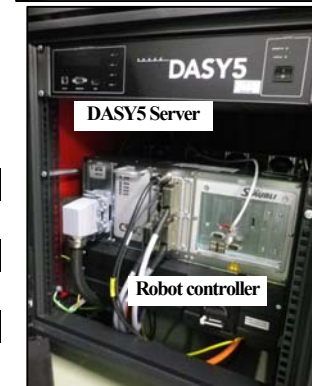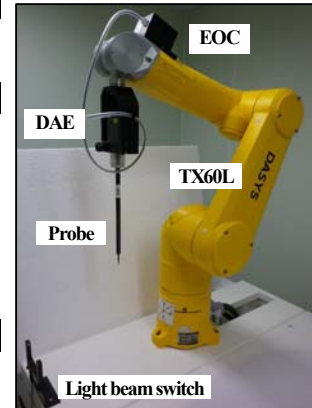

Appendix 3-4: Simulated tissue composition and parameter confirmation

Liquid type	Body, MBBL 3500-5800V5
M/N / Control No.	SL AAM 501 AB / KSLM580-02
Ingredient	Mixture (%)
Water	60-80 %
C ₈ H ₁₈ O ₃ (DGBE) (Diethylene glycol monobutyl ether)	20-40 %
NaCl	0-1.5 %
Manufacture	Schmid&Partner Engineering AG

*. The dielectric parameters were checked prior to assessment using the 85070E dielectric probe kit.

Dielectric parameter measurement results (Body tissue)															
Date	Freq. [MHz]	Ambient		Liq.T.[deg.C.]		Liquid Depth [mm]	Parameters Relative permittivity: ϵ_r Conductivity: σ	Target value		Measured	ASAR (1g) [%] (ϵ^3)	Deviation for #1 (Std.)[%]	Limit [%]	Deviation for #2 (Cal.)[%]	Limit [%]
		Temp [deg.C.]	Humidity [%RH]	Before	After			#1:Std. (ϵ^1)	#2:Cal. (ϵ^2)						
July 5, 2013	5200	24.3	57	24.2	24.2	(129)	ϵ_r [-]	49.01	47.0	47.45	(+0.56)	-3.2	± 5	+1.0	± 5
							σ [S/m]	5.299	5.42	5.472		+3.3	± 5	+0.8	± 5

*1. The target value is a parameter defined in Appendix A of KDB865664 D01 (v01r01).

*2. The target value is a parameter defined in the calibration data sheet of D2450V2 (sn:822) / D5GHzV2 (sn:1070) dipole calibrated by Schmid & Partner Engineering AG (Certification No. D2450V2-822_Jan13 / D5GHzV2-1070_Mar13, the data sheet was filed in this report).

*3. ASAR correction was only applied to head simulated tissue.

$$\text{ASAR}(1g) = C_{\epsilon_r} \times \Delta \epsilon_r + C_{\sigma} \times \Delta \sigma, C_{\epsilon_r} = -7.854E-4 \times f^3 + 9.402E-3 \times f^2 - 2.742E-2 \times f + 0.2026 / C_{\sigma} = 9.804E-3 \times f^3 - 8.661E-2 \times f^2 + 2.981E-2 \times f + 0.7829$$

The target value is a parameter defined in Appendix A of KDB865664 D01 (v01r01), the dielectric parameters suggested for head and body tissue simulating liquid are given at 3000 and 5800MHz. As an intermediate solution, dielectric parameters for the frequencies between 3000 to 5800 MHz were obtained using linear interpolation.

Standard					Interpolated				
f(MHz)	Head Tissue		Body Tissue		f(MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
3000	38.5	2.40	52.0	2.73	5180	36.01	4.635	49.04	5.276
5800	35.3	5.27	48.2	6.00	5200	35.99	4.655	49.01	5.299
					5230	35.95	4.686	48.97	5.334
					5240	35.94	4.696	48.96	5.346


Appendix 3-5: Daily check data

Prior to the SAR assessment of EUT, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The daily check results are in the table below. (*. Refer to Appendix 3-6 of measurement data.)

Daily check results															
Date	Freq. [MHz]	Liquid Type	Ambient		Liquid Temp. [deg.C.]			Liquid Depth [mm]	ϵ_r [-] measured	σ [S/m] measured	Power drift [dB]	Daily check target & measured			
			Temp [deg.C.]	Humidity [%RH]	Check	Before	After					SAR 1g [W/kg]		Deviation [%]	Limit [%]
												Target	Measured (*5)		
July 5 2013	5200	Body	24.8	55	24.2	24.1	23.9	129	47.45	5.472	0.05	7.41(*4)	7.70 (at 100mW) (ASAR corrected: -)	+3.9	±10

*4. The target value is a parameter defined in the calibration data sheet of D2450V2 (sn:822) and D5GHzV2 (sn:1070) dipole calibrated by Schmid & Partner Engineering AG (Certification No. D2450V2-822_Jan13 / D5GHzV2-1070_Mar13, the data sheet was filed in this report).

*5. Since the body SAR measured b body tissue, ASAR correction was not applied.

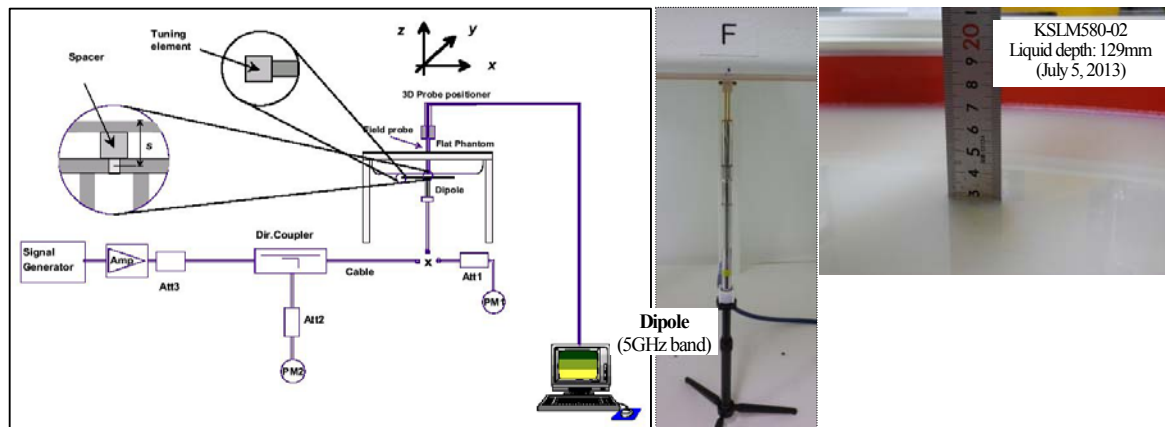

Test setup for the system performance check

Appendix 3-6: Daily check measurement data

5200MHz Daily check (Body tissue) / Forward conducted power: 100mW

EUT: Dipole(5GHz); Type: D5GHZV2; Serial: 1070

Communication System: CW; Frequency: 5200 MHz; Crest Factor: 1.0

Medium: MSL5800; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.472$ S/m; $\epsilon_r = 47.45$; $\rho = 1000$ kg/m³

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Probe: EX3DV4 - SN3540; ConvF(4.16, 4.16, 4.16); Calibrated: 2012/07/19; -DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)
-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 141.0$ -Electronics: DAE4 Sn518; Calibrated: 2012/10/17
-Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

Area:60x60,10 (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 19.6 W/kg

Area:60x60,10 (61x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 20.2 W/kg

Z Scan;140,5 (1x1x29): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 20.3 W/kg


Fast SAR: SAR(1 g) = 7.77 mW/g;

Zoom:xy4-z1.4/d1.4/r1.4.2 (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 67.705 V/m; Power Drift = 0.05 dB; Maximum value of SAR (measured) = 17.9 W/kg

Peak SAR (extrapolated) = 29.828 mW/g (+3.2%, vs. speag-cal.=28.9mW/g)

SAR(1 g) = 7.7 mW/g (+3.9%, vs. speag-cal.=7.41mW/g); SAR(10 g) = 2.25 mW/g

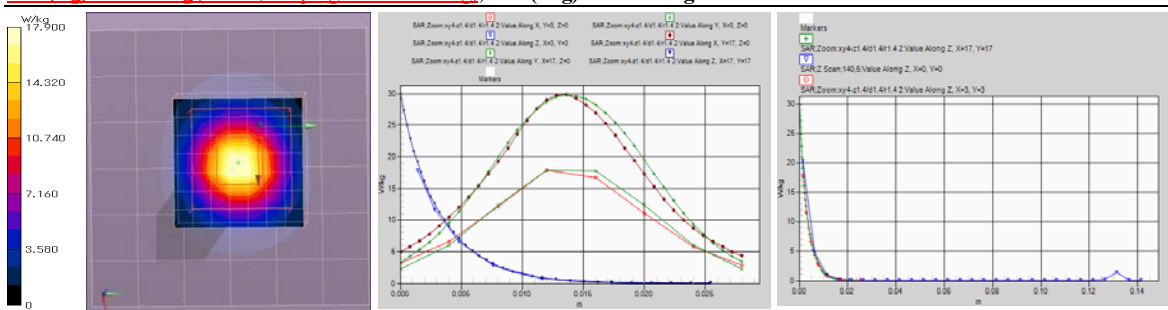

Remarks: * Date tested: 2013/07/05; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 129mm; Position: distance of dipole to phantom: 8mm (10mm to liquid); ambient: 24.8 deg.C. /55 %RH,
* liquid temperature: 24.1(start)/23.9(end)/24.2(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 3-7: Daily check uncertainty

Uncertainty of system daily check (~6GHz) (Body liquid, 2.4-6GHz, ϵ' , σ : $\leq 5\%$) (v06)							1g SAR	10g SAR	
Combined measurement uncertainty of the measurement system (k=1)							$\pm 12.7\%$	$\pm 12.4\%$	
Expanded uncertainty (k=2)							$\pm 25.4\%$	$\pm 24.8\%$	
	Error Description	Uncertainty Value	Probability distribution	Divisor	ci (1g)	ci (10g)	ui (1g)	ui (10g)	V_i, v_{eff}
A	Measurement System (DASY5)						(std. uncertainty)	(std. uncertainty)	
1	Probe Calibration Error (2.45,5.2,5.3,5.5,5.6,5.8GHz $\pm$ 100MHz)	$\pm 6.55\%$	Normal	1	1	1	$\pm 6.55\%$	$\pm 6.55\%$	∞
2	Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
3	Hemispherical isotropy (*flat phantom, $<5^\circ$)	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	∞
4	Boundary effects	$\pm 4.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.8\%$	$\pm 2.8\%$	∞
5	Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
6	Probe modulation response (CW)	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
7	System detection limit	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
8	Response Time Error (<5 ms/100ms wait)	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
9	Integration Time Error (CW)	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
10	System readout electronics (DAE)	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
11	RF ambient conditions-noise	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
12	RF ambient conditions-reflections	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
13	Probe positioner mechanical tolerance	$\pm 3.3\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.9\%$	$\pm 1.9\%$	∞
14	Probe positioning with respect to phantom shell	$\pm 6.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$	∞
15	Max.SAR evaluation	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
B	Test Sample Related								
16	Deviation of the experimental source	$\pm 5.5\%$	Normal	1	1	1	$\pm 5.5\%$	$\pm 5.5\%$	∞
17	Dipole to liquid distance (10mm $\pm$ 0.2mm, <2 deg.)	$\pm 2.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
18	Drift of output power (measured, <0.2 dB)	$\pm 2.5\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.4\%$	$\pm 1.4\%$	∞
C	Phantom and Setup								
19	Phantom uncertainty	$\pm 2.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
20	Liquid conductivity (target) ($\leq 5\%$)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
21	Liquid conductivity (meas.)	$\pm 3.0\%$	Normal	1	0.64	0.43	$\pm 1.9\%$	$\pm 1.3\%$	∞
22	Liquid permittivity (target) ($\leq 5\%$)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
23	Liquid permittivity (meas.)	$\pm 3.0\%$	Normal	1	0.6	0.49	$\pm 1.8\%$	$\pm 1.5\%$	∞
24	Liquid Conductivity-temp.uncertainty (≤ 2 deg.C.)	$\pm 5.2\%$	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 2.3\%$	$\pm 2.1\%$	∞
25	Liquid Permittivity-temp.uncertainty (≤ 2 deg.C.)	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.1\%$	$\pm 0.1\%$	∞
Combined Standard Uncertainty							$\pm 12.7\%$	$\pm 12.4\%$	
Expanded Uncertainty (k=2)							$\pm 25.4\%$	$\pm 24.8\%$	

* This measurement uncertainty budget is suggested by IEEE 1528, IEC 62209-2 and determined by Schmid & Partner Engineering AG (DASY5 Uncertainty Budget).

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **PTT**

Certificate No: **EX3-3540_Jul12/2**

CALIBRATION CERTIFICATE (Replacement of No: EX3-3540_Jul12)

Object: **EX3DV4 - SN:3540**

Calibration procedure(s): **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 19, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAEs	SN: 660	10-Jan-12 (No. DAE4-660_Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by: **Name: Jelko Kasirati, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Kata Pokorec, Technical Manager, Signature: [Signature]**

Issued: February 14, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3540_Jul12/2

Page 1 of 11

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	Issue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{k,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}:** A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4 - SN:3540

July 19, 2012

Probe EX3DV4

SN:3540

Manufactured: August 23, 2005
Calibrated: July 19, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3540

July 19, 2012

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3540

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.44	0.53	0.54	$\pm 10.1 \%$
DCP (mV) ^B	105.4	102.2	107.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^C (k=2)
0	CW	X	0.0	0.0	1.0	0.00	193.8	$\pm 3.8 \%$
		Y	0.0	0.0	1.0		168.5	
		Z	0.0	0.0	1.0		161.7	
10274	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8,10)	X	5.83	66.8	18.9	4.87	118.5	$\pm 3.8 \%$
		Y	5.61	66.1	18.5		106.3	
		Z	6.08	67.9	19.4		132.2	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm(X,Y,Z) do not affect the E^2 -field uncertainty inside ISL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3540

July 19, 2012

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3540

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^e	Conductivity (S/m) ^e	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	10.71	10.71	10.71	0.10	1.76	± 12.0 %
835	41.5	0.90	10.10	10.10	10.10	0.10	1.04	± 12.0 %
900	41.5	0.97	9.95	9.95	9.95	0.10	1.31	± 12.0 %
1450	40.5	1.20	9.24	9.24	9.24	0.18	1.65	± 12.0 %
1750	40.1	1.37	9.13	9.13	9.13	0.42	0.74	± 12.0 %
1810	40.0	1.40	8.79	8.79	8.79	0.42	0.75	± 12.0 %
1900	40.0	1.40	8.68	8.68	8.68	0.29	0.86	± 12.0 %
1950	40.0	1.40	8.40	8.40	8.40	0.41	0.74	± 12.0 %
2000	40.0	1.40	8.59	8.59	8.59	0.44	0.75	± 12.0 %
2450	39.2	1.80	7.62	7.62	7.62	0.26	0.98	± 12.0 %
2600	39.0	1.96	7.50	7.50	7.50	0.36	0.81	± 12.0 %
5200	36.0	4.66	4.65	4.65	4.65	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.37	4.37	4.37	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.45	4.45	4.45	0.45	1.80	± 13.1 %
5600	35.5	5.07	4.10	4.10	4.10	0.50	1.80	± 13.1 %
5800	35.3	5.27	4.14	4.14	4.14	0.50	1.80	± 13.1 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^e At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3540

July 19, 2012

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3540

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^E	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	10.51	10.51	10.51	0.80	0.58	± 12.0 %
835	55.2	0.97	10.24	10.24	10.24	0.30	0.96	± 12.0 %
900	55.0	1.05	10.12	10.12	10.12	0.25	1.16	± 12.0 %
1750	53.4	1.49	8.49	8.49	8.49	0.67	0.62	± 12.0 %
1810	53.3	1.52	8.40	8.40	8.40	0.28	0.97	± 12.0 %
1900	53.3	1.52	8.24	8.24	8.24	0.33	0.87	± 12.0 %
2000	53.3	1.52	8.38	8.38	8.38	0.20	1.18	± 12.0 %
2450	52.7	1.95	7.72	7.72	7.72	0.79	0.51	± 12.0 %
2600	52.5	2.16	7.58	7.58	7.58	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.16	4.16	4.16	0.45	1.90	± 13.1 %
5300	48.9	5.42	3.96	3.96	3.96	0.45	1.90	± 13.1 %
5500	48.6	5.65	3.72	3.72	3.72	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.69	3.69	3.69	0.50	1.90	± 13.1 %
5800	48.2	6.00	3.61	3.61	3.61	0.50	1.90	± 13.1 %

^C Frequency validity of ≤ 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3540

July 19, 2012

Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

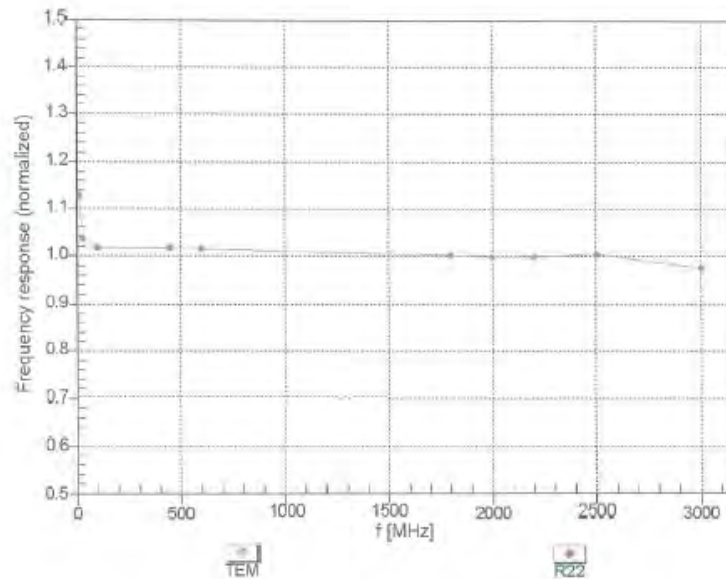



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN.3540

July 19, 2012

Receiving Pattern (ϕ), $\theta = 0^\circ$

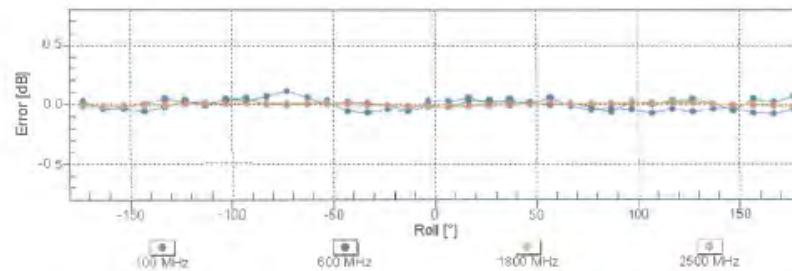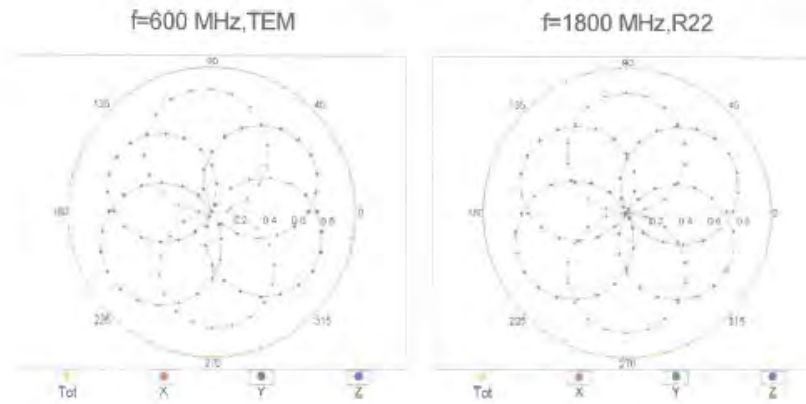



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3540

July 19, 2012

Dynamic Range f(SAR_{head})
(TEM cell , f = 900 MHz)

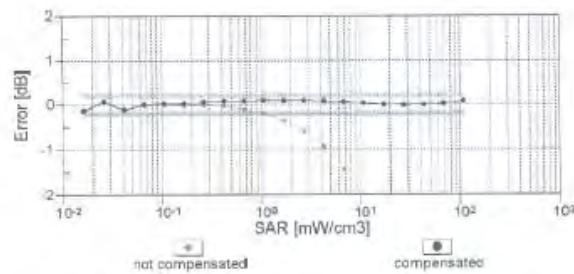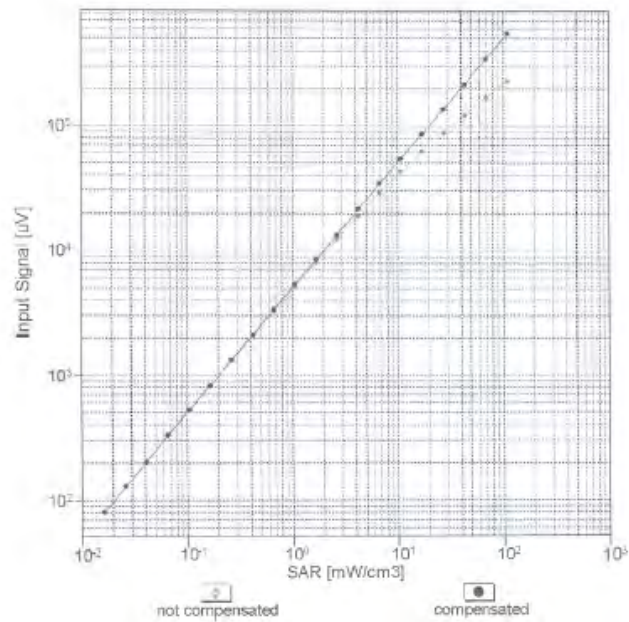

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Certificate No: EX3-3540_Jul12/2


Page 9 of 11

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)


EX3DV4- SN:3540

July 19, 2012

Conversion Factor Assessment

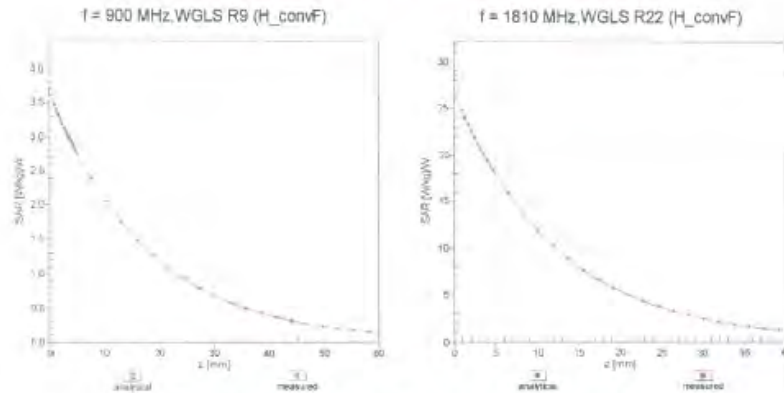

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

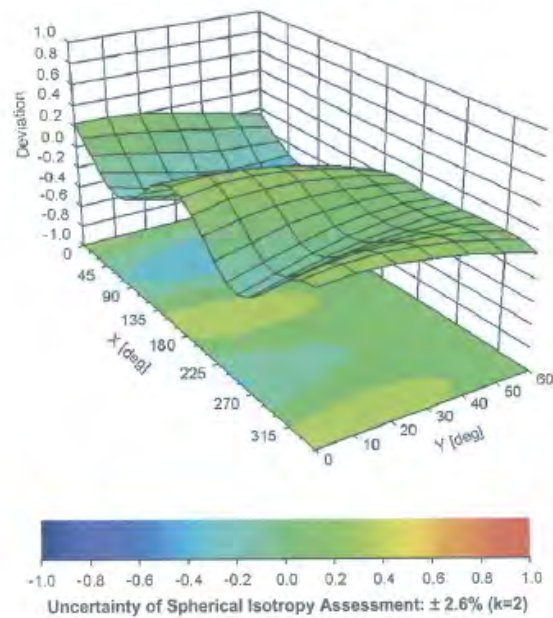

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3540

July 19, 2012

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3540

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	156.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **UL Japan Shonan (PTT)**

Certificate No: **D5GHzV2-1070_Mar13**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1070**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **March 14, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37282783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Claudio Leubler** **Laboratory Technician** **Signature**

Approved by: **Katja Pokovic** **Technical Manager**

Issued: March 14, 2013

Certificate No: D5GHzV2-1070_Mar13

Page 1 of 20

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	4.52 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.97 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.5 W/kg ± 19.5 % (k=2)

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.3 ± 6 %	4.62 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	4.80 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.52 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	84.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.9 W/kg ± 19.5 % (k=2)

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.9 ± 6 %	4.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.6 ± 6 %	5.11 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.88 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.2 W/kg ± 19.5 % (k=2)

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.42 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.6 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.55 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.56 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 19.5 % (k=2)

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	5.80 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.92 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.8 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.94 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.99 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.1 ± 6 %	6.21 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.39 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.3 W/kg ± 19.5 % (k=2)

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.7 Ω - 12.5 j Ω
Return Loss	- 18.2 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	51.9 Ω - 6.5 j Ω
Return Loss	- 23.6 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	49.2 Ω - 7.4 j Ω
Return Loss	- 22.5 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	55.6 Ω - 9.9 j Ω
Return Loss	- 19.4 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	53.9 Ω - 4.8 j Ω
Return Loss	- 24.6 dB

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.8 Ω - 12.4 j Ω
Return Loss	- 18.2 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	51.3 Ω - 5.0 j Ω
Return Loss	- 25.8 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	49.3 Ω - 5.6 j Ω
Return Loss	- 24.9 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	54.5 Ω - 8.2 j Ω
Return Loss	- 21.0 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	54.5 Ω - 2.5 j Ω
Return Loss	- 26.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1,203 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 26, 2008

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

DASY5 Validation Report for Head TSL

Date: 13.03.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1070

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz,
Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.52$ S/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.8$ S/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.91$ S/m; $\epsilon_r = 33.9$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 33.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1);
Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76);
Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.581 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 7.97 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.313 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 8.27 W/kg; SAR(10 g) = 2.38 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.127 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 33.9 W/kg


SAR(1 g) = 8.52 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 20.9 W/kg

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 64.687 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 33.4 W/kg
SAR(1 g) = 8.38 W/kg; SAR(10 g) = 2.39 W/kg
Maximum value of SAR (measured) = 20.5 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 61.292 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 32.8 W/kg
SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.25 W/kg
Maximum value of SAR (measured) = 19.7 W/kg

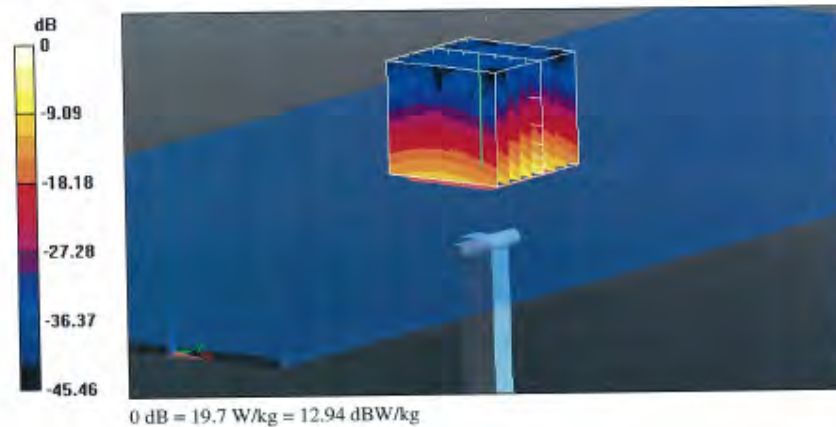

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Impedance Measurement Plot for Head TSL

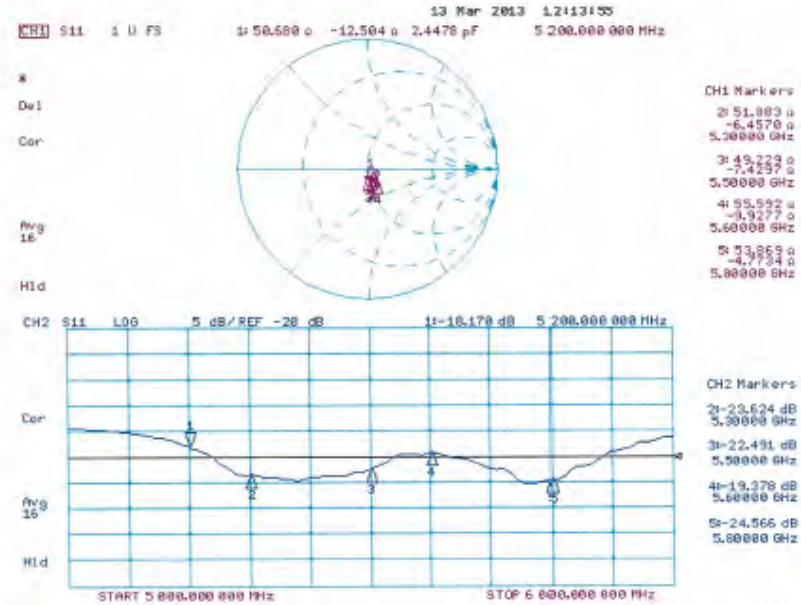

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

DASY5 Validation Report for Body TSL

Date: 14.03.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1070

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz,
Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.55$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.8$ S/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.94$ S/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.21$ S/m; $\epsilon_r = 46.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.030 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.855 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 7.56 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.871 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 34.0 W/kg


SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.2 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)


**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,
dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.618 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 35.1 W/kg
SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.22 W/kg
Maximum value of SAR (measured) = 19.7 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,
dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 55.394 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 34.3 W/kg
SAR(1 g) = 7.39 W/kg; SAR(10 g) = 2.05 W/kg
Maximum value of SAR (measured) = 18.5 W/kg

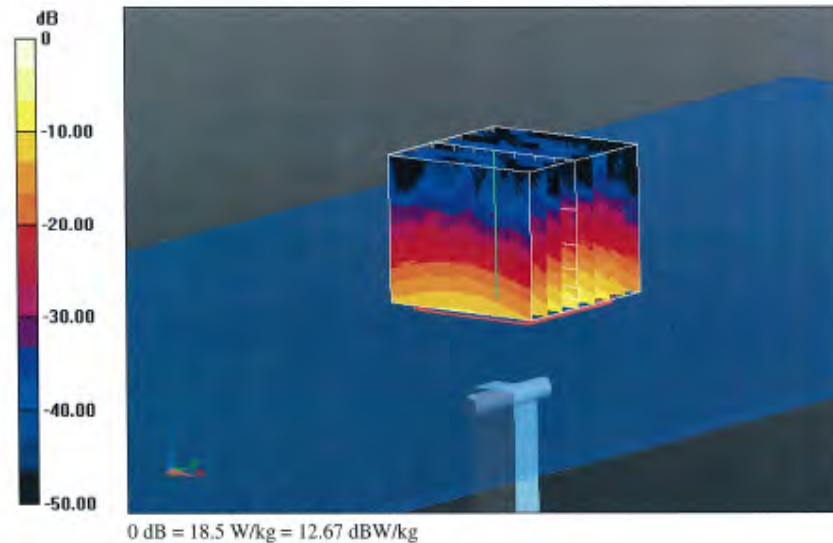

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Impedance Measurement Plot for Body TSL

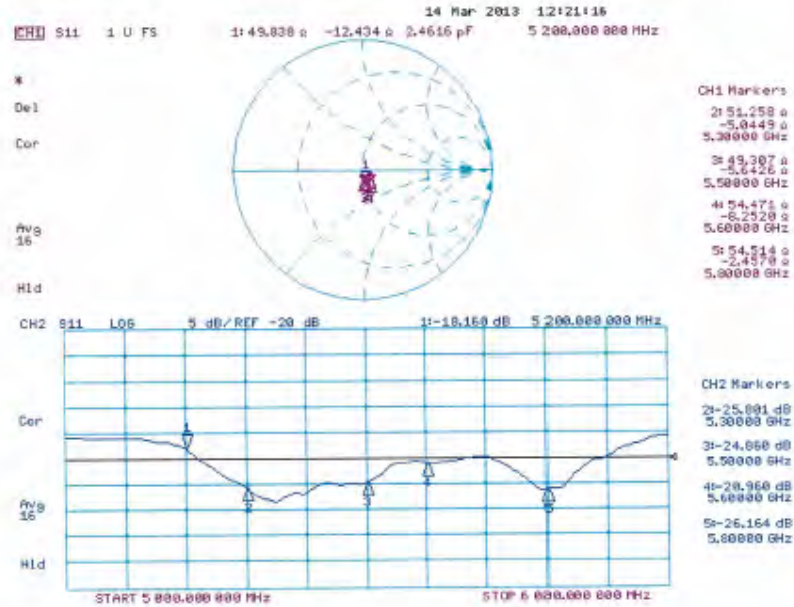

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Appendix B: Additional Measurements

Upon customer request, additional antenna parameter measurements were done using customer spacers, for Head and Body conditions. Results are summarized on the following pages.

Antenna Parameters with Head TSL at 5200 MHz

New spacer	50.7 Ω - 12.5 j Ω	- 18.2 dB
UL spacer #1	51.0 Ω - 12.2 j Ω	- 18.4 dB
UL spacer #2	51.2 Ω - 12.0 j Ω	- 18.6 dB

Antenna Parameters with Head TSL at 5300 MHz

New spacer	51.9 Ω - 6.5 j Ω	- 23.6 dB
UL spacer #1	51.9 Ω - 6.3 j Ω	- 23.8 dB
UL spacer #2	52.0 Ω - 6.0 j Ω	- 24.1 dB

Antenna Parameters with Head TSL at 5500 MHz

New spacer	49.2 Ω - 7.4 j Ω	- 22.5 dB
UL spacer #1	49.6 Ω - 7.6 j Ω	- 22.4 dB
UL spacer #2	50.0 Ω - 7.0 j Ω	- 23.1 dB

Antenna Parameters with Head TSL at 5600 MHz

New spacer	55.6 Ω - 9.9 j Ω	- 19.4 dB
UL spacer #1	55.7 Ω - 9.2 j Ω	- 19.8 dB
UL spacer #2	55.6 Ω - 8.8 j Ω	- 20.1 dB

Antenna Parameters with Head TSL at 5800 MHz

New spacer	53.9 Ω - 4.8 j Ω	- 24.6 dB
UL spacer #1	54.2 Ω - 4.7 j Ω	- 24.4 dB
UL spacer #2	54.6 Ω - 3.9 j Ω	- 24.8 dB

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Antenna Parameters with Body TSL at 5200 MHz

New spacer	49.8 Ω - 12.4 $j\Omega$	- 18.2 dB
UL spacer #1	49.9 Ω - 12.4 $j\Omega$	- 18.2 dB
UL spacer #2	50.1 Ω - 12.3 $j\Omega$	- 18.3 dB

Antenna Parameters with Body TSL at 5300 MHz

New spacer	51.3 Ω - 5.0 $j\Omega$	- 25.8 dB
UL spacer #1	51.4 Ω - 5.0 $j\Omega$	- 25.8 dB
UL spacer #2	51.5 Ω - 4.8 $j\Omega$	- 26.2 dB

Antenna Parameters with Body TSL at 5500 MHz

New spacer	49.3 Ω - 5.6 $j\Omega$	- 24.9 dB
UL spacer #1	49.2 Ω - 5.6 $j\Omega$	- 24.9 dB
UL spacer #2	49.5 Ω - 5.4 $j\Omega$	- 25.2 dB

Antenna Parameters with Body TSL at 5600 MHz


New spacer	54.5 Ω - 8.2 $j\Omega$	- 21.0 dB
UL spacer #1	54.7 Ω - 8.2 $j\Omega$	- 20.8 dB
UL spacer #2	54.8 Ω - 7.8 $j\Omega$	- 21.2 dB

Antenna Parameters with Body TSL at 5800 MHz


New spacer	54.5 Ω - 2.5 $j\Omega$	- 26.2 dB
UL spacer #1	54.4 Ω - 2.2 $j\Omega$	- 26.5 dB
UL spacer #2	54.8 Ω - 1.8 $j\Omega$	- 26.2 dB

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Impedance Measurement Plot for Head TSL (UL Spacer #1)

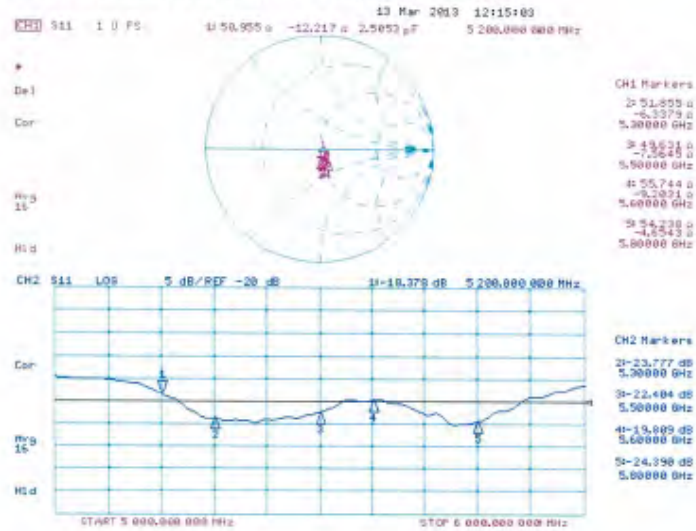


Impedance Measurement Plot for Head TSL (UL Spacer #2)

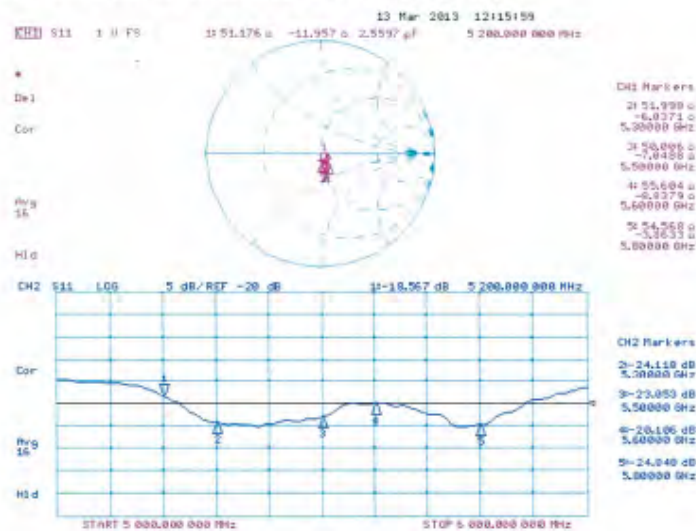

Appendix 3-9: Calibration certificate: Dipole (D5GHzV2) (cont'd)

Impedance Measurement Plot for Body TSL (UL Spacer #1)

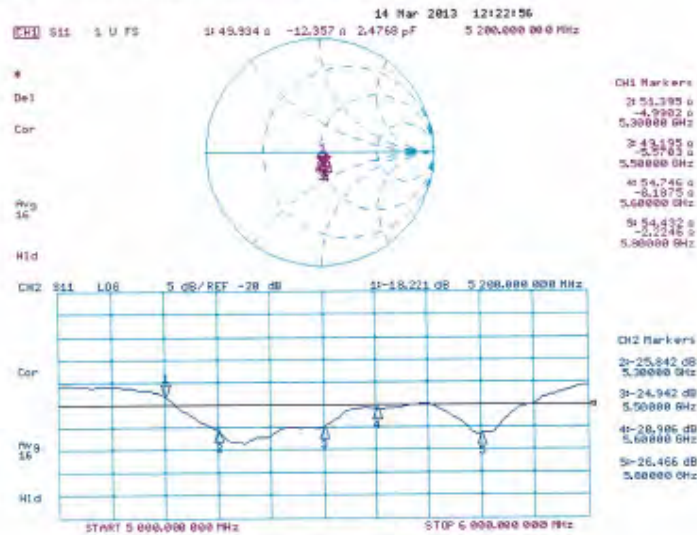

Impedance Measurement Plot for Body TSL (UL Spacer #2)

