

Intertek  
731 Enterprise Drive  
Lexington, KY 40510

Tel 859 226 1000  
Fax 859 226 1040

[www.intertek.com](http://www.intertek.com)

# Sargent & Greenleaf, Inc.

## TEST REPORT

### SCOPE OF WORK

EMC TESTING – AXISBLU SYSTEM

### REPORT NUMBER

103621914LEX-002.1

### ISSUE DATE

9/4/2018

### [REVISED DATE]

9/25/2018

### PAGES

67

### DOCUMENT CONTROL NUMBER

Non-Specific EMC Report Shell Rev. December 2017  
© 2017 INTERTEK



## EMC TEST REPORT

(FULL COMPLIANCE)

**Report Number:** 103621914LEX-002.1

**Project Number:** G103621914

**Report Issue Date:** 9/25/2018

**Model(s) Tested:** AX26-302

**Model(s) Partially Tested:** AX26-102

AX26-202

**Standards:** Title 47 CFR Part 15.247

RSS-247 Issue 2

RSS-Gen Issue 5

Tested by:  
Intertek Testing Services NA, Inc.  
731 Enterprise Dr.  
Lexington, KY 40510  
USA

Client:  
Sargent & Greenleaf, Inc.  
One Security Drive  
Nicholasville, KY 40356-0569  
USA

Report prepared by



Brian Lackey, Project Engineer

Report reviewed by



Bryan Taylor, Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



## Table of Contents

|           |                                                                           |           |
|-----------|---------------------------------------------------------------------------|-----------|
| <b>1</b>  | <b><i>Introduction and Conclusion.....</i></b>                            | <b>4</b>  |
| <b>2</b>  | <b><i>Test Summary .....</i></b>                                          | <b>4</b>  |
| <b>3</b>  | <b><i>Client Information .....</i></b>                                    | <b>5</b>  |
| <b>4</b>  | <b><i>Description of Equipment under Test and Variant Models.....</i></b> | <b>6</b>  |
| <b>5</b>  | <b><i>System Setup and Method .....</i></b>                               | <b>6</b>  |
| <b>6</b>  | <b><i>Receiver Spurious Emissions.....</i></b>                            | <b>8</b>  |
| <b>7</b>  | <b><i>Transmitter Spurious Emissions.....</i></b>                         | <b>17</b> |
| <b>8</b>  | <b><i>Output Power.....</i></b>                                           | <b>40</b> |
| <b>9</b>  | <b><i>Occupied Bandwidth .....</i></b>                                    | <b>43</b> |
| <b>10</b> | <b><i>Power Spectral Density.....</i></b>                                 | <b>51</b> |
| <b>11</b> | <b><i>Conducted Spurious Emissions.....</i></b>                           | <b>59</b> |
| <b>12</b> | <b><i>Antenna Requirement .....</i></b>                                   | <b>66</b> |
| <b>13</b> | <b><i>Revision History.....</i></b>                                       | <b>67</b> |



## 1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

## 2 Test Summary

| Section | Test full name                                                                | Result          |
|---------|-------------------------------------------------------------------------------|-----------------|
| 6       | Receiver Spurious Emissions<br>(ANSI C63.4: 2014)                             | Pass            |
| 7       | Transmitter Spurious Emissions<br>(FCC Part 15.247(d), RSS-247 Issue 2 § 5.5) | Pass            |
| 8       | Output Power<br>(FCC Part 15.247(b)(3), RSS-247 Issue 2 § 5.4(d))             | Pass            |
| 9       | Occupied Bandwidth<br>(FCC Part 15.247, RSS-247 Issue 2 § 5.2(a))             | Pass            |
| 10      | Power Spectral Density<br>(FCC Part 15.247(e), RSS-247 Issue 2 § 5.2(b))      | Pass            |
| 11      | Conducted Spurious Emissions<br>(FCC Part 15.247(d), RSS-247 Issue 2 § 5.5)   | Pass            |
| 12      | Antenna Requirement<br>(FCC Part 15.203, RSS-Gen Issue 5 § 6.8)               | Pass            |
| -       | Conducted Emissions<br>(ANSI C63.4: 2014)                                     | NA <sup>1</sup> |

<sup>1</sup> Test it not applicable. Unit is battery powered and does not connect directly or indirectly to AC Mains.



### 3 Client Information

This product was tested at the request of the following:

| Client Information           |                                                           |
|------------------------------|-----------------------------------------------------------|
| <b>Client Name:</b>          | Sargent & Greenleaf, Inc.                                 |
| <b>Address:</b>              | One Security Drive<br>Nicholasville, KY 40356-0569<br>USA |
| <b>Contact:</b>              | Jeff Howell                                               |
| <b>Telephone:</b>            | +1 (859) 241-2256                                         |
| <b>Email:</b>                | Jeff.howell@sbdinc.com                                    |
| Manufacturer Information     |                                                           |
| <b>Manufacturer Name:</b>    | Sargent & Greenleaf, Inc.                                 |
| <b>Manufacturer Address:</b> | One Security Drive<br>Nicholasville, KY 40356-0569<br>USA |



#### 4 Description of Equipment under Test and Variant Models

| Equipment Under Test                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Product Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | AxisBlu System                                                 |
| Model Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | AX26-102<br>AX26-202<br>AX26-302                               |
| Serial Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | AX26-102: 00000050<br>AX26-202: 00000051<br>AX26-302: 00000049 |
| Receive Date                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 8/27/2018                                                      |
| Test Start Date                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 8/28/2018                                                      |
| Test End Date                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 9/4/2018                                                       |
| Device Received Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Good                                                           |
| Test Sample Type                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Production                                                     |
| Rated Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 9V Battery                                                     |
| Rated Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | -                                                              |
| Rated Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -                                                              |
| Number of Phases                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | -                                                              |
| Software Used By EUT                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | None                                                           |
| Frequency Band(s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2400-2483.5MHz                                                 |
| Modulation Type(s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | GFSK                                                           |
| Test Channel(s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0 (2402MHz), 19 (2440MHz), 39 (2480MHz)                        |
| Maximum Antenna Gain (dBi)                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 2.5 (from datasheet)                                           |
| Maximum Output Power (dBm)                                                                                                                                                                                                                                                                                                                                                                                                                                                              | -0.19 (conducted)                                              |
| Description of Equipment Under Test (provided by client)                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                |
| The system provides a Remote Keypad for a proven Electronic Lock. The system was designed to insert itself between the physical keypad and the internal lock in a secure container. The transmitter will reside within the secure container with the lock, with the antenna is installed in either a keypad, or an escutcheon, on the outside of the container. A mobile device (and APP) provide the input device for the remote keypad, and the BLE provides the communications link. |                                                                |

##### 4.1 Variant Models:

The following variant models were partially tested as part of this evaluation, but have been identified by the manufacturer as being electrically identical models, depopulated models, or with reasonable similarity to the model(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

- AX26-102, identical electronics with different front cover
- AX26-202, identical electronics with different front cover

#### 5 System Setup and Method

##### 5.1 Method:

Configuration as required by ANSI C63.4: 2014 and ANSI C63.10:2013




| No. | Descriptions of EUT Exercising                                                   |
|-----|----------------------------------------------------------------------------------|
| 1   | Transmitting a Bluetooth Low Energy (BLE) signal or low, middle, or high channel |
| 2   | Idle, not transmitting. External DC supply used in lieu of battery for testing.  |

| Cables |                                |            |           |          |             |
|--------|--------------------------------|------------|-----------|----------|-------------|
| ID     | Description                    | Length (m) | Shielding | Ferrites | Termination |
| 1      | DC Supply (in lieu of battery) | 2          | No        | No       | Bare Wire   |
| 2      | USB-Serial Debug Cable         | 2          | No        | No       | USB         |

| Support Equipment |              |              |               |
|-------------------|--------------|--------------|---------------|
| Description       | Manufacturer | Model Number | Serial Number |
| DC Supply         | HP           | -            | -             |
| Computer          | Dell         | -            | -             |

## 5.2 EUT Block Diagram:

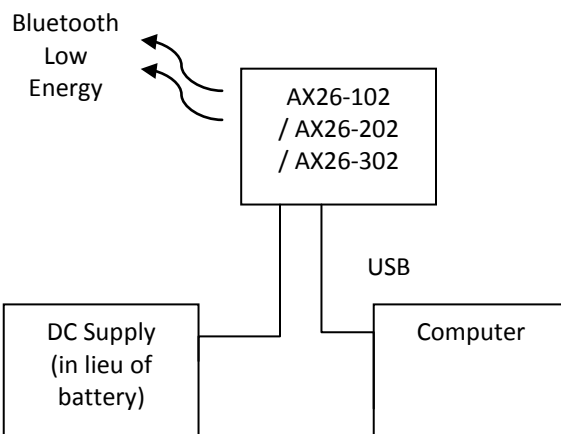



## 6 Receiver Spurious Emissions

### 6.1 Test Method

Tests are performed in accordance with ANSI C63.4: 2014

**TEST SITE:** 10m ALSE

**Site Designation:** 10m Chamber

#### Measurement Uncertainty

| Measurement             | Frequency Range | Expanded Uncertainty (k=2) | Ucisp  |
|-------------------------|-----------------|----------------------------|--------|
| Radiated Emissions, 10m | 30-1000 MHz     | 3.9dB                      | 6.3 dB |
| Radiated Emissions, 3m  | 30-1000 MHz     | 4.0dB                      | 6.3 dB |
| Radiated Emissions, 3m  | 1-6 GHz         | 4.7dB                      | 5.2 dB |
| Radiated Emissions, 3m  | 6-15 GHz        | 4.7dB                      | 5.5 dB |
| Radiated Emissions, 3m  | 15-18 GHz       | 4.7dB                      | 5.5 dB |
| Radiated Emissions, 3m  | 18-40 GHz       | 4.7dB                      | 5.5 dB |

As shown in the table above our radiated emissions  $U_{lab}$  is less than the corresponding  $U_{CISPR}$  reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required.





## 6.2 Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 52.0 dB $\mu$ V  
AF = 7.4 dB/m  
CF = 1.6 dB  
AG = 29.0 dB  
FS = 32 dB $\mu$ V/m

To convert from dB $\mu$ V to  $\mu$ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB $\mu$ V

### Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$
$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

**6.3 Test Equipment Used**

| Description                       | Asset | Manufacturer   | Model  | Cal Date                 | Cal Due                  |
|-----------------------------------|-------|----------------|--------|--------------------------|--------------------------|
| EMI Test Receiver                 | 3900  | Rohde&Schwarz  | ESU40  | 9/20/2017                | 9/20/2018                |
| Bilog Antenna(JB6)                | 7088  | SunAR          | JB6    | 7/24/2018                | 7/24/2019                |
| Horn Antenna                      | 3780  | ETS            | 3117   | 6/11/2018                | 6/11/2019                |
| System Controller                 | 4096  | ETS Lindgren   | 2090   | Verify at<br>Time of Use | Verify at<br>Time of Use |
| System Controller                 | 3957  | Sunol Sciences | SC99V  | Verify at<br>Time of Use | Verify at<br>Time of Use |
| 3m Cable<br>Antenna→Preamp        | 3074  |                |        | 11/29/2017               | 11/29/2018               |
| 3m Cable<br>Preamplifier          | 3918  | TS-PR18        | 122005 | 11/29/2017               | 11/29/2018               |
| 3m Cable<br>Preamp→Chamber        | 2588  |                |        | 11/29/2017               | 11/29/2018               |
| 3m Cable<br>Chamber→Control Room  | 2593  |                |        | 11/29/2017               | 11/29/2018               |
| 3m Cable<br>Control Room→Receiver | 2592  |                |        | 11/29/2017               | 11/29/2018               |
| 10m Cable<br>Antenna→Preamp       | 3339  |                |        | 11/29/2017               | 11/29/2018               |

**6.4 Software Utilized**


| Name  | Manufacturer    | Version         |
|-------|-----------------|-----------------|
| EMC32 | Rohde & Schwarz | Version 9.15.02 |

**6.5 Test Results**

The sample tested was found to be **compliant**.


**6.6 Test Conditions**

|                                  |                 |                       |           |
|----------------------------------|-----------------|-----------------------|-----------|
| Test Personnel:                  | B. Lackey       | Test Date:            | 8/28/2018 |
| Supervising/Reviewing Engineer:  |                 | Limit Applied:        | Class B   |
| (Where Applicable)               | NA              | Ambient Temperature:  | 23.0C     |
| Product Standard:                | FCC Part 15.247 | Relative Humidity:    | 47.2%     |
| Input Voltage:                   | Battery         | Atmospheric Pressure: | 988.8mbar |
| Pretest Verification w / Ambient |                 |                       |           |
| Signals or BB Source:            | Yes             |                       |           |

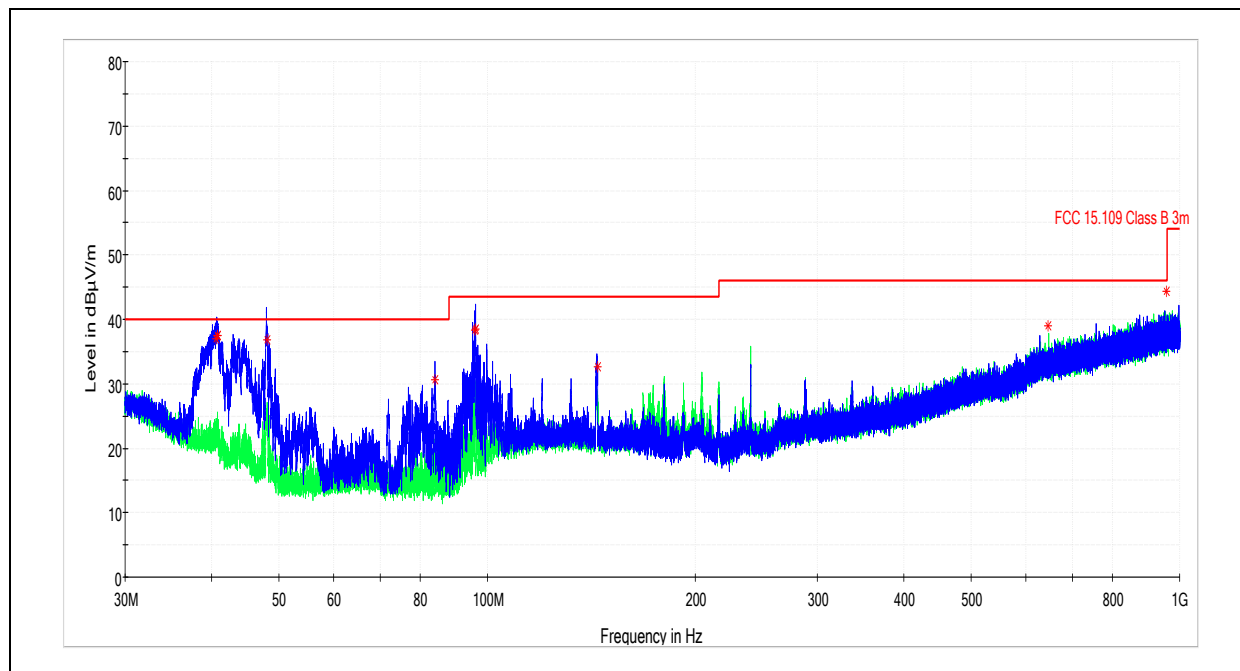**6.7 Test Data: 30MHz – 1GHz (AX26-102)**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 40.602000       | 37.05              | 40.00          | 2.95        | 120.000         | 105.3       | V   | 272.0         | 19.7       |
| 40.790000       | 37.42              | 40.00          | 2.58        | 120.000         | 105.3       | V   | 311.0         | 19.5       |
| 40.809000       | 37.49              | 40.00          | 2.51        | 120.000         | 105.1       | V   | 284.0         | 19.5       |
| 48.096000       | 36.79              | 40.00          | 3.21        | 120.000         | 105.7       | V   | 300.0         | 15.7       |
| 84.103000       | 30.66              | 40.00          | 9.34        | 120.000         | 100.1       | V   | 312.0         | 14.9       |
| 95.905000       | 38.39              | 43.52          | 5.13        | 120.000         | 99.7        | V   | 310.0         | 17.2       |
| 96.190000       | 38.56              | 43.52          | 4.96        | 120.000         | 105.3       | V   | 299.0         | 17.3       |
| 144.380000      | 32.70              | 43.52          | 10.82       | 120.000         | 99.5        | V   | 347.0         | 21.0       |
| 645.450000      | 38.94              | 46.02          | 7.08        | 120.000         | 118.4       | H   | 191.0         | 31.2       |
| 956.640000      | 44.37              | 46.02          | 1.65        | 120.000         | 367.8       | V   | 322.0         | 35.5       |


Deviations, Additions, or Exclusions: None

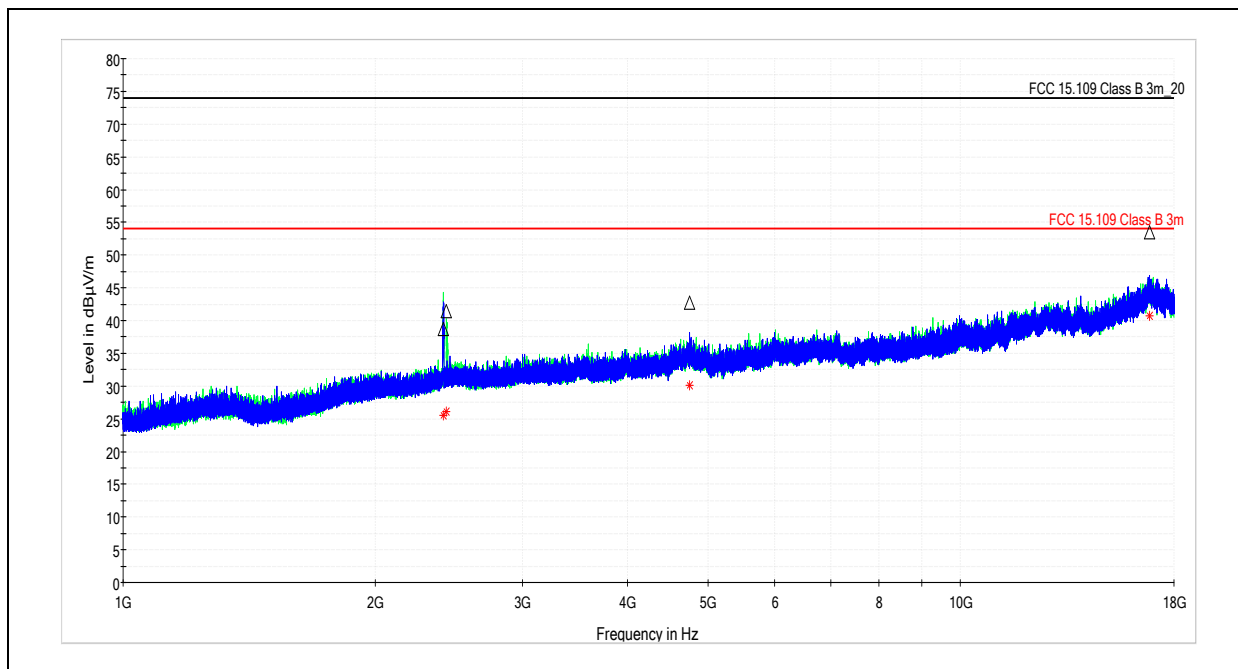**6.8 Test Data: 1GHz – 18GHz (AX26-102)**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2411.000000     | 38.66            | 74.00          | 35.34       | 1000.000        | 410.0       | H   | 277.0         | 3.2        |
| 2434.800000     | 41.47            | 74.00          | 32.53       | 1000.000        | 228.0       | H   | 154.0         | 3.4        |
| 4747.200000     | 42.74            | 74.00          | 31.26       | 1000.000        | 410.0       | V   | 335.0         | 7.3        |
| 16818.600000    | 53.47            | 74.00          | 20.53       | 1000.000        | 241.0       | V   | 182.0         | 21.7       |


| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2411.000000     | 25.56            | 54.00          | 28.44       | 1000.000        | 410.0       | H   | 277.0         | 3.2        |
| 2434.800000     | 26.12            | 54.00          | 27.88       | 1000.000        | 228.0       | H   | 154.0         | 3.4        |
| 4747.200000     | 30.16            | 54.00          | 23.84       | 1000.000        | 410.0       | V   | 335.0         | 7.3        |
| 16818.600000    | 40.67            | 54.00          | 13.33       | 1000.000        | 241.0       | V   | 182.0         | 21.7       |

Deviations, Additions, or Exclusions: None

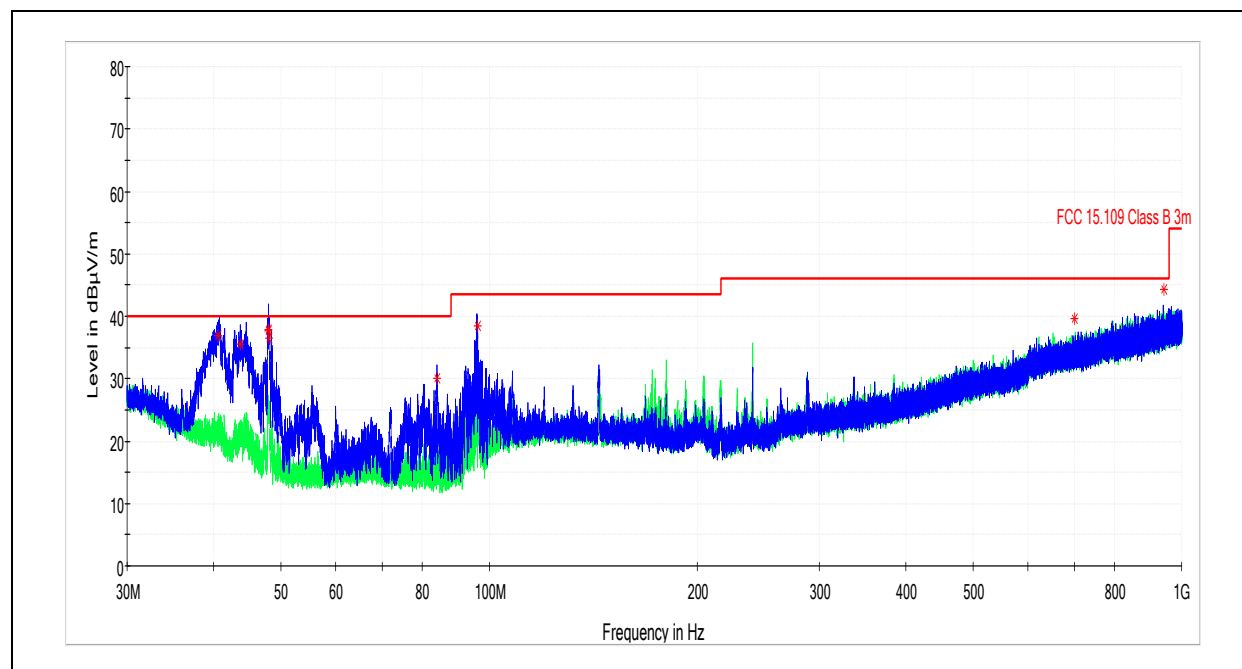**6.9 Test Data: 30MHz – 1GHz (AX26-202)**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 40.588000       | 36.87              | 40.00          | 3.13        | 120.000         | 105.3       | V   | 273.0         | 19.7       |
| 43.719000       | 35.46              | 40.00          | 4.54        | 120.000         | 105.4       | V   | 266.0         | 17.7       |
| 47.988000       | 37.90              | 40.00          | 2.10        | 120.000         | 100.8       | V   | 292.0         | 15.7       |
| 47.993000       | 37.74              | 40.00          | 2.26        | 120.000         | 105.3       | V   | 299.0         | 15.7       |
| 48.108000       | 36.57              | 40.00          | 3.43        | 120.000         | 106.5       | V   | 280.0         | 15.7       |
| 84.103000       | 30.09              | 40.00          | 9.91        | 120.000         | 118.4       | V   | 292.0         | 14.9       |
| 96.165000       | 38.50              | 43.52          | 5.02        | 120.000         | 104.4       | V   | 274.0         | 17.3       |
| 699.490000      | 39.69              | 46.02          | 6.33        | 120.000         | 297.4       | H   | 84.0          | 31.9       |
| 941.680000      | 44.20              | 46.02          | 1.82        | 120.000         | 237.9       | V   | 166.0         | 35.3       |


Deviations, Additions, or Exclusions: None

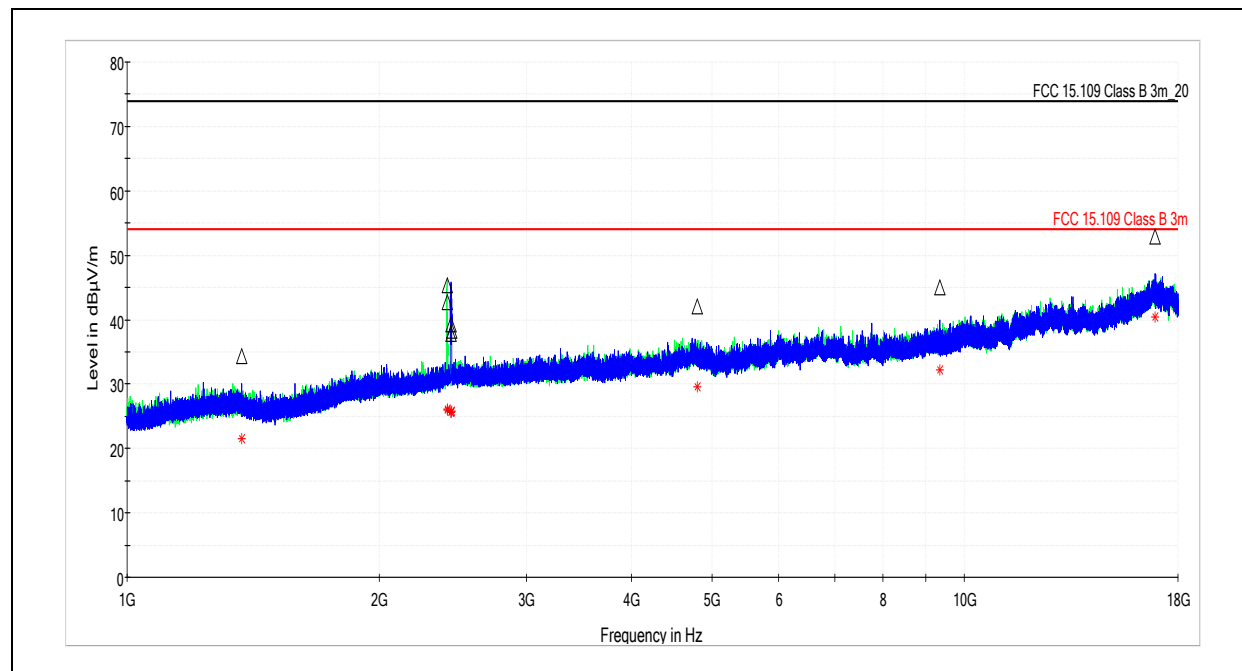**6.10 Test Data: 1GHz – 18GHz (AX26-202)**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 1370.400000     | 34.41            | 74.00          | 39.59       | 1000.000        | 410.0       | V   | 345.0         | -1.5       |
| 2410.400000     | 42.63            | 74.00          | 31.37       | 1000.000        | 341.0       | H   | 0.0           | 3.2        |
| 2412.400000     | 45.34            | 74.00          | 28.66       | 1000.000        | 410.0       | H   | 156.0         | 3.2        |
| 2435.400000     | 39.28            | 74.00          | 34.72       | 1000.000        | 280.0       | V   | 325.0         | 3.3        |
| 2437.400000     | 37.76            | 74.00          | 36.24       | 1000.000        | 360.0       | V   | 0.0           | 3.3        |
| 2441.200000     | 38.34            | 74.00          | 35.66       | 1000.000        | 410.0       | V   | 335.0         | 3.3        |
| 4798.000000     | 41.99            | 74.00          | 32.01       | 1000.000        | 410.0       | H   | 268.0         | 7.4        |
| 9344.800000     | 44.93            | 74.00          | 29.07       | 1000.000        | 410.0       | V   | 281.0         | 12.3       |
| 16891.200000    | 52.95            | 74.00          | 21.05       | 1000.000        | 380.0       | V   | 340.0         | 21.8       |


| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 1370.400000     | 21.54            | 54.00          | 32.46       | 1000.000        | 410.0       | V   | 345.0         | -1.5       |
| 2410.400000     | 26.03            | 54.00          | 27.97       | 1000.000        | 341.0       | H   | 0.0           | 3.2        |
| 2412.400000     | 26.12            | 54.00          | 27.88       | 1000.000        | 410.0       | H   | 156.0         | 3.2        |
| 2435.400000     | 25.64            | 54.00          | 28.36       | 1000.000        | 280.0       | V   | 325.0         | 3.3        |
| 2437.400000     | 25.68            | 54.00          | 28.32       | 1000.000        | 360.0       | V   | 0.0           | 3.3        |
| 2441.200000     | 25.74            | 54.00          | 28.26       | 1000.000        | 410.0       | V   | 335.0         | 3.3        |
| 4798.000000     | 29.54            | 54.00          | 24.46       | 1000.000        | 410.0       | H   | 268.0         | 7.4        |
| 9344.800000     | 32.14            | 54.00          | 21.86       | 1000.000        | 410.0       | V   | 281.0         | 12.3       |
| 16891.200000    | 40.46            | 54.00          | 13.54       | 1000.000        | 380.0       | V   | 340.0         | 21.8       |

Deviations, Additions, or Exclusions: None

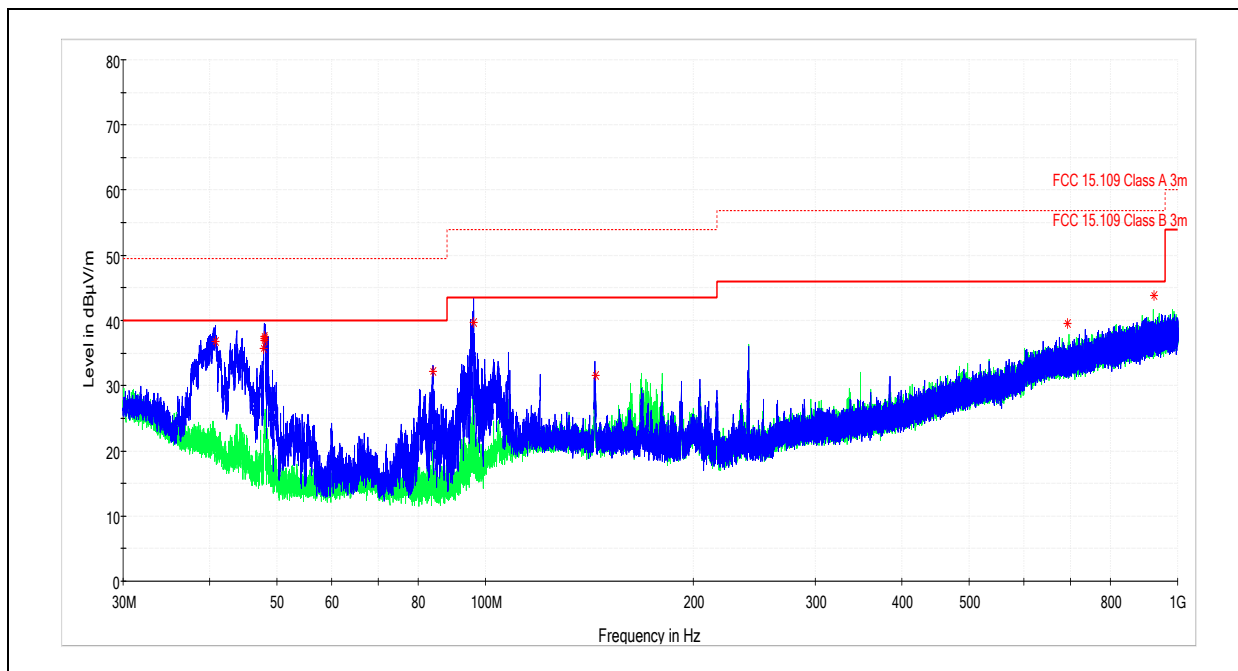**6.11 Test Data: 30MHz – 1GHz (AX26-302)**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 40.754000       | 36.75              | 40.00          | 3.25        | 120.000         | 105.8       | V   | 0.0           | 19.6       |
| 47.918000       | 35.78              | 40.00          | 4.22        | 120.000         | 105.1       | V   | 0.0           | 15.7       |
| 47.941000       | 37.00              | 40.00          | 3.00        | 120.000         | 99.9        | V   | 337.0         | 15.7       |
| 48.018000       | 37.18              | 40.00          | 2.82        | 120.000         | 99.2        | V   | 0.0           | 15.7       |
| 48.042000       | 37.61              | 40.00          | 2.39        | 120.000         | 100.1       | V   | 348.0         | 15.7       |
| 84.087000       | 32.25              | 40.00          | 7.75        | 120.000         | 107.1       | V   | 8.0           | 14.9       |
| 96.171000       | 39.72              | 43.52          | 3.80        | 120.000         | 100.4       | V   | 128.0         | 17.3       |
| 144.320000      | 31.60              | 43.52          | 11.92       | 120.000         | 105.3       | V   | 68.0          | 21.0       |
| 692.380000      | 39.54              | 46.02          | 6.48        | 120.000         | 368.2       | H   | 36.0          | 31.8       |
| 924.360000      | 43.78              | 46.02          | 2.24        | 120.000         | 356.1       | H   | 119.0         | 35.2       |

Deviations, Additions, or Exclusions: None

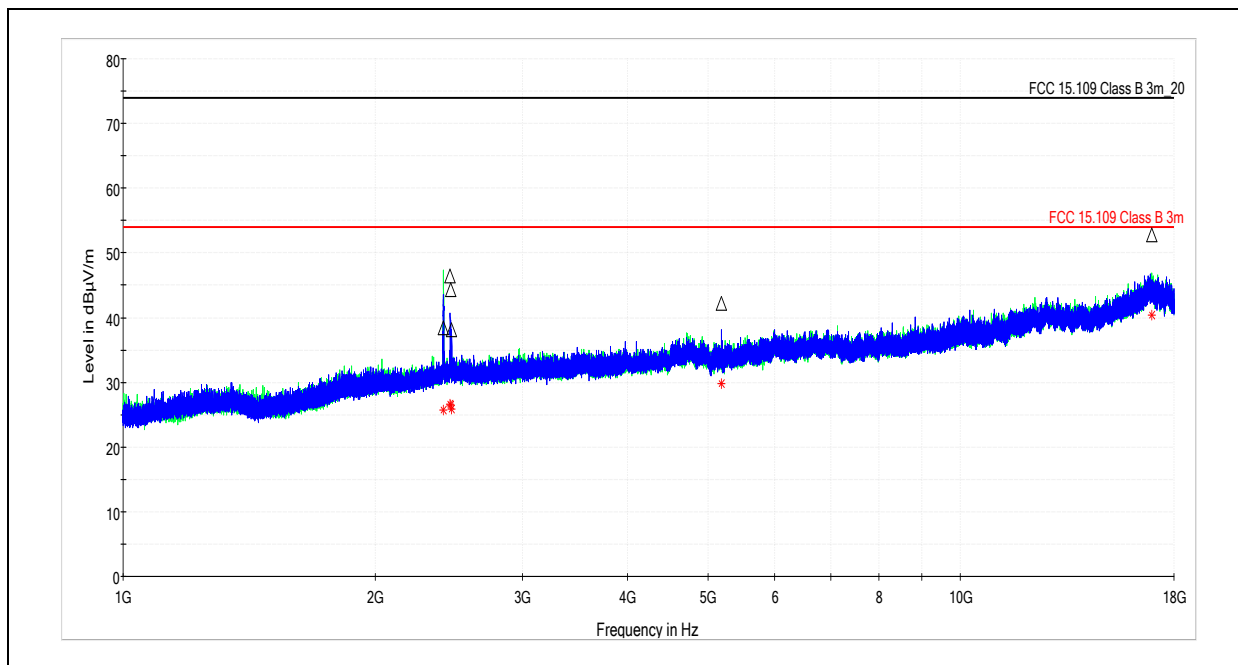**6.12 Test Data: 1GHz – 18GHz (AX26-302)**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2414.000000     | 38.42            | 74.00          | 35.58       | 1000.000        | 410.0       | H   | 0.0           | 3.2        |
| 2459.400000     | 46.39            | 74.00          | 27.61       | 1000.000        | 294.0       | V   | -1.0          | 3.3        |
| 2462.600000     | 44.32            | 74.00          | 29.68       | 1000.000        | 370.0       | V   | 202.0         | 3.3        |
| 2469.600000     | 38.08            | 74.00          | 35.92       | 1000.000        | 337.0       | V   | 193.0         | 3.3        |
| 5182.400000     | 42.12            | 74.00          | 31.88       | 1000.000        | 410.0       | V   | 151.0         | 7.4        |
| 16936.200000    | 52.73            | 74.00          | 21.27       | 1000.000        | 349.0       | H   | 133.0         | 21.7       |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2414.000000     | 25.65            | 54.00          | 28.35       | 1000.000        | 410.0       | H   | 0.0           | 3.2        |
| 2459.400000     | 26.69            | 54.00          | 27.31       | 1000.000        | 294.0       | V   | -1.0          | 3.3        |
| 2462.600000     | 26.43            | 54.00          | 27.57       | 1000.000        | 370.0       | V   | 202.0         | 3.3        |
| 2469.600000     | 25.84            | 54.00          | 28.16       | 1000.000        | 337.0       | V   | 193.0         | 3.3        |
| 5182.400000     | 29.77            | 54.00          | 24.23       | 1000.000        | 410.0       | V   | 151.0         | 7.4        |
| 16936.200000    | 40.35            | 54.00          | 13.65       | 1000.000        | 349.0       | H   | 133.0         | 21.7       |

Deviations, Additions, or Exclusions: None





## 7 Transmitter Spurious Emissions

### 7.1 Test Limits

#### FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### RSS-247 Issue 2 § 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 7.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.12.1 Radiated emission measurements.

**7.3 Test Equipment Used**

| Description                       | Asset | Manufacturer   | Model  | Cal Date                 | Cal Due                  |
|-----------------------------------|-------|----------------|--------|--------------------------|--------------------------|
| EMI Test Receiver                 | 3900  | Rohde&Schwarz  | ESU40  | 9/20/2017                | 9/20/2018                |
| Bilog Antenna(JB6)                | 7088  | SunAR          | JB6    | 7/24/2018                | 7/24/2019                |
| Horn Antenna                      | 3780  | ETS            | 3117   | 6/11/2018                | 6/11/2019                |
| System Controller                 | 4096  | ETS Lindgren   | 2090   | Verify at<br>Time of Use | Verify at<br>Time of Use |
| System Controller                 | 3957  | Sunol Sciences | SC99V  | Verify at<br>Time of Use | Verify at<br>Time of Use |
| 3m Cable<br>Antenna→Preamp        | 3074  |                |        | 11/29/2017               | 11/29/2018               |
| 3m Cable<br>Preamplifier          | 3918  | TS-PR18        | 122005 | 11/29/2017               | 11/29/2018               |
| 3m Cable<br>Preamp→Chamber        | 2588  |                |        | 11/29/2017               | 11/29/2018               |
| 3m Cable<br>Chamber→Control Room  | 2593  |                |        | 11/29/2017               | 11/29/2018               |
| 3m Cable<br>Control Room→Receiver | 2592  |                |        | 11/29/2017               | 11/29/2018               |
| 10m Cable<br>Antenna→Preamp       | 3339  |                |        | 11/29/2017               | 11/29/2018               |

**7.4 Software Utilized**

| Name  | Manufacturer    | Version         |
|-------|-----------------|-----------------|
| EMC32 | Rohde & Schwarz | Version 9.15.02 |

**7.5 Test Results**

The sample tested was found to be **compliant**.


**7.6 Test Conditions**

|                                  |                 |                       |           |
|----------------------------------|-----------------|-----------------------|-----------|
| Test Personnel:                  | B. Lackey       | Test Date:            | 8/28/2018 |
| Supervising/Reviewing Engineer:  |                 | Limit Applied:        | See Above |
| (Where Applicable)               | NA              | Ambient Temperature:  | 23.0C     |
| Product Standard:                | FCC Part 15.247 | Relative Humidity:    | 47.2%     |
| Input Voltage:                   | Battery         | Atmospheric Pressure: | 988.8mbar |
| Pretest Verification w / Ambient |                 |                       |           |
| Signals or BB Source:            | Yes             |                       |           |




## 7.7 Test Data (AX26-102)

### 7.7.1 BLE Channel 0 (2402MHz) Spurious Emissions:

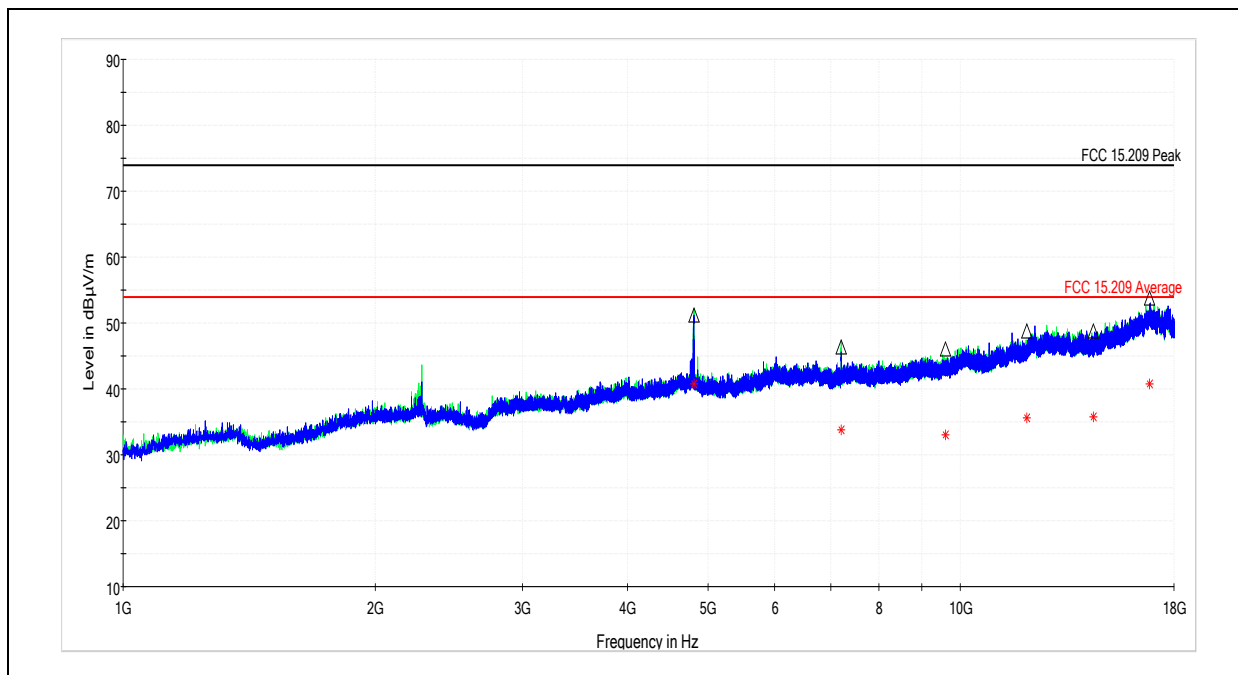


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4803.500000     | 51.18            | 74.00          | 22.82       | 1000.000        | 313.0       | H   | 231.0         | 7.4        |
| 7205.000000     | 46.32            | 74.00          | 27.68       | 1000.000        | 301.0       | H   | 133.0         | 10.2       |
| 9607.500000     | 46.11            | 74.00          | 27.89       | 1000.000        | 410.0       | H   | 346.0         | 13.1       |
| 12009.500000    | 48.78            | 74.00          | 25.22       | 1000.000        | 370.0       | V   | 231.0         | 16.3       |
| 14410.000000    | 48.82            | 74.00          | 25.18       | 1000.000        | 410.0       | V   | 136.0         | 16.4       |
| 16814.500000    | 53.83            | 74.00          | 20.17       | 1000.000        | 100.0       | H   | 252.0         | 21.7       |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4803.500000     | 40.71            | 54.00          | 13.29       | 1000.000        | 313.0       | H   | 231.0         | 7.4        |
| 7205.000000     | 33.73            | 54.00          | 20.27       | 1000.000        | 301.0       | H   | 133.0         | 10.2       |
| 9607.500000     | 32.97            | 54.00          | 21.03       | 1000.000        | 410.0       | H   | 346.0         | 13.1       |
| 12009.500000    | 35.58            | 54.00          | 18.42       | 1000.000        | 370.0       | V   | 231.0         | 16.3       |
| 14410.000000    | 35.72            | 54.00          | 18.28       | 1000.000        | 410.0       | V   | 136.0         | 16.4       |
| 16814.500000    | 40.73            | 54.00          | 13.27       | 1000.000        | 100.0       | H   | 252.0         | 21.7       |

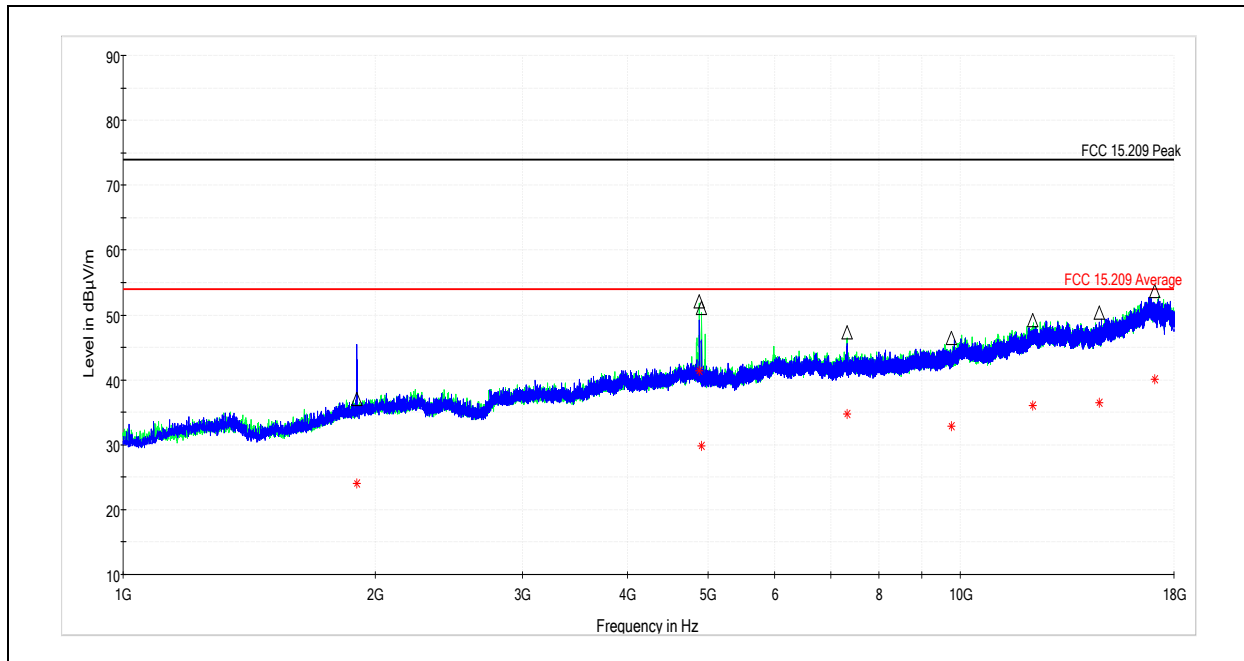**7.7.2 BLE Channel 19 (2440MHz) Spurious Emissions:**


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 1903.000000     | 37.09            | 74.00          | 36.91       | 1000.000        | 410.0       | V   | 71.0          | 1.3        |
| 4881.000000     | 52.08            | 74.00          | 21.92       | 1000.000        | 174.0       | H   | 318.0         | 6.9        |
| 4911.500000     | 51.09            | 74.00          | 22.91       | 1000.000        | 370.0       | H   | 322.0         | 6.9        |
| 7321.500000     | 47.32            | 74.00          | 26.68       | 1000.000        | 361.0       | H   | 182.0         | 10.5       |
| 9760.500000     | 46.47            | 74.00          | 27.53       | 1000.000        | 410.0       | V   | 144.0         | 13.1       |
| 12199.500000    | 49.24            | 74.00          | 24.76       | 1000.000        | 166.0       | H   | 198.0         | 16.6       |
| 14642.500000    | 50.43            | 74.00          | 23.57       | 1000.000        | 410.0       | V   | 139.0         | 16.8       |
| 17083.500000    | 53.67            | 74.00          | 20.33       | 1000.000        | 359.0       | V   | 46.0          | 21.5       |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 1903.000000     | 24.01            | 54.00          | 29.99       | 1000.000        | 410.0       | V   | 71.0          | 1.3        |
| 4881.000000     | 41.33            | 54.00          | 12.67       | 1000.000        | 174.0       | H   | 318.0         | 6.9        |
| 4911.500000     | 29.78            | 54.00          | 24.22       | 1000.000        | 370.0       | H   | 322.0         | 6.9        |
| 7321.500000     | 34.68            | 54.00          | 19.32       | 1000.000        | 361.0       | H   | 182.0         | 10.5       |
| 9760.500000     | 32.82            | 54.00          | 21.18       | 1000.000        | 410.0       | V   | 144.0         | 13.1       |
| 12199.500000    | 36.09            | 54.00          | 17.91       | 1000.000        | 166.0       | H   | 198.0         | 16.6       |
| 14642.500000    | 36.46            | 54.00          | 17.54       | 1000.000        | 410.0       | V   | 139.0         | 16.8       |
| 17083.500000    | 40.14            | 54.00          | 13.86       | 1000.000        | 359.0       | V   | 46.0          | 21.5       |

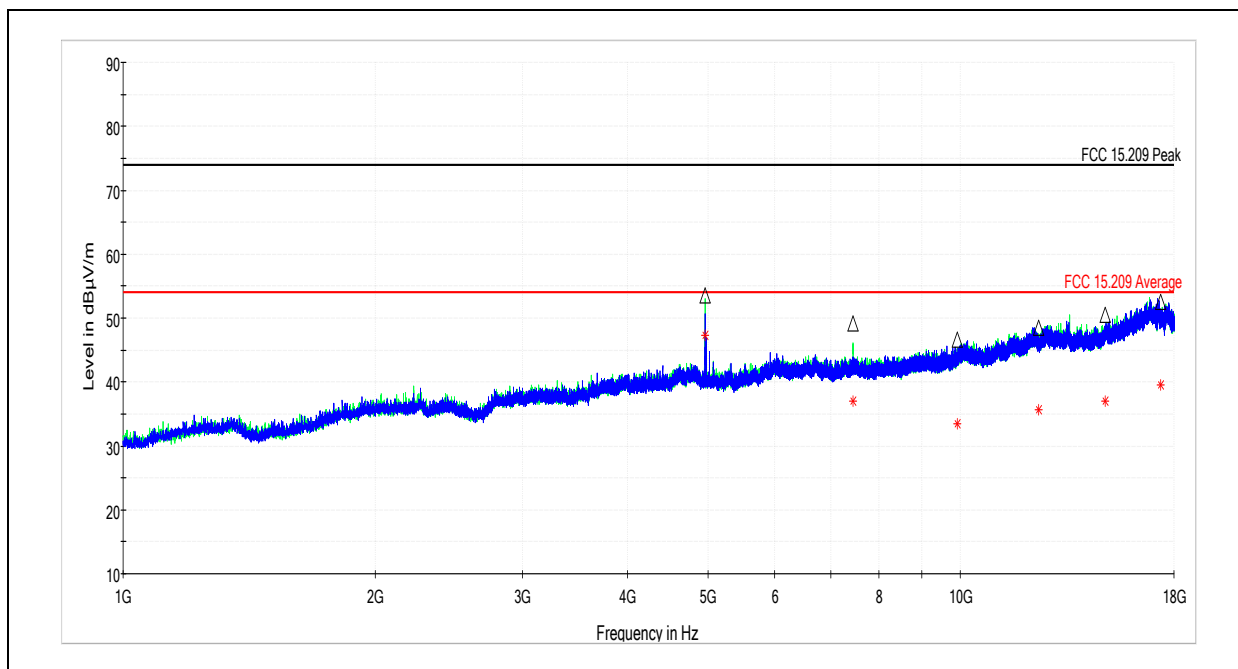
**7.7.3 BLE Channel 39 (2480MHz) Spurious Emissions:**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4960.500000     | 53.53            | 74.00          | 20.47       | 1000.000        | 209.0       | H   | 320.0         | 6.7        |
| 7439.500000     | 49.13            | 74.00          | 24.87       | 1000.000        | 410.0       | H   | 142.0         | 10.7       |
| 9919.500000     | 46.60            | 74.00          | 27.40       | 1000.000        | 262.0       | V   | 259.0         | 13.4       |
| 12410.500000    | 48.54            | 74.00          | 25.46       | 1000.000        | 410.0       | H   | 100.0         | 16.2       |
| 14884.500000    | 50.56            | 74.00          | 23.44       | 1000.000        | 410.0       | V   | 325.0         | 18.0       |
| 17360.000000    | 52.54            | 74.00          | 21.46       | 1000.000        | 410.0       | V   | 309.0         | 20.7       |


| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4960.500000     | 47.38            | 54.00          | 6.62        | 1000.000        | 209.0       | H   | 320.0         | 6.7        |
| 7439.500000     | 37.05            | 54.00          | 16.95       | 1000.000        | 410.0       | H   | 142.0         | 10.7       |
| 9919.500000     | 33.52            | 54.00          | 20.48       | 1000.000        | 262.0       | V   | 259.0         | 13.4       |
| 12410.500000    | 35.64            | 54.00          | 18.36       | 1000.000        | 410.0       | H   | 100.0         | 16.2       |
| 14884.500000    | 37.06            | 54.00          | 16.94       | 1000.000        | 410.0       | V   | 325.0         | 18.0       |
| 17360.000000    | 39.47            | 54.00          | 14.53       | 1000.000        | 410.0       | V   | 309.0         | 20.7       |

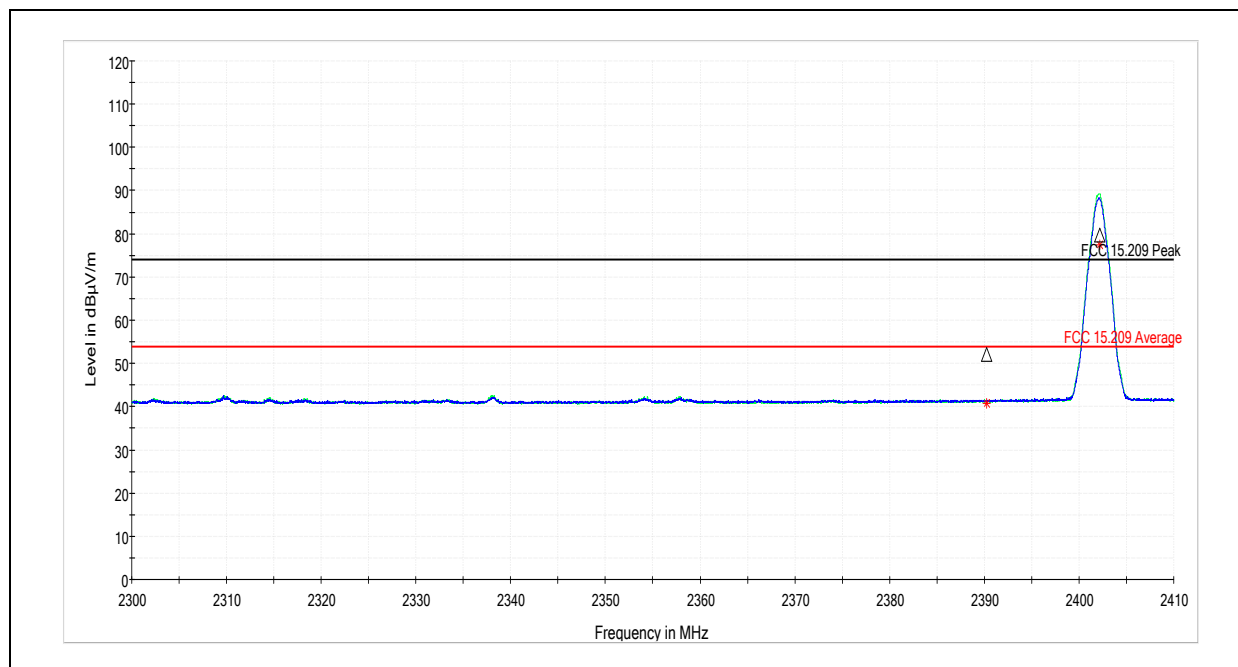**7.7.4 Emissions at the low band edge:**

| Frequency (MHz) | Average (dBμV/m) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2390.211000     | 40.73            | ---              | 54.00          | 13.27       | 1000.000        | 295.0       | V   | 257.0         | 37.0       |
| 2390.211000     | ---              | 52.11            | 74.00          | 21.89       | 1000.000        | 295.0       | V   | 257.0         | 37.0       |

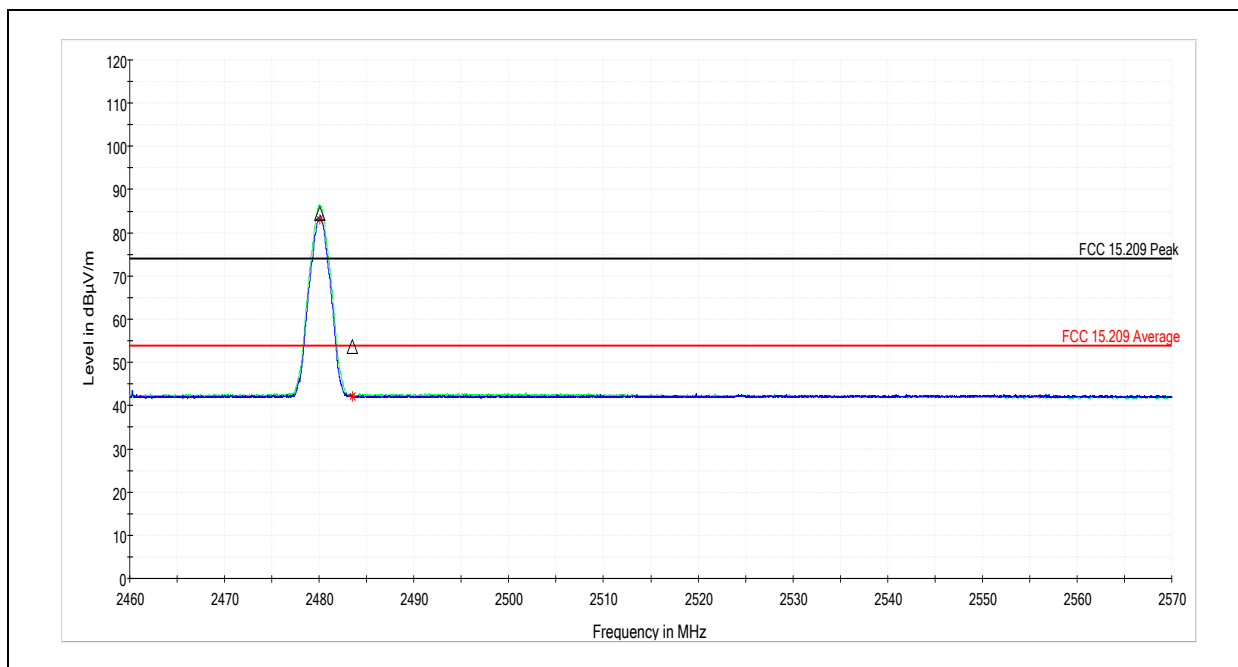**7.7.5 Emissions at the high band edge:**


| Frequency (MHz) | Average (dBμV/m) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2483.496000     | 42.10            | ---              | 54.00          | 11.90       | 1000.000        | 270.0       | H   | 276.0         | 37.5       |
| 2483.496000     | ---              | 53.58            | 74.00          | 20.42       | 1000.000        | 270.0       | H   | 276.0         | 37.5       |

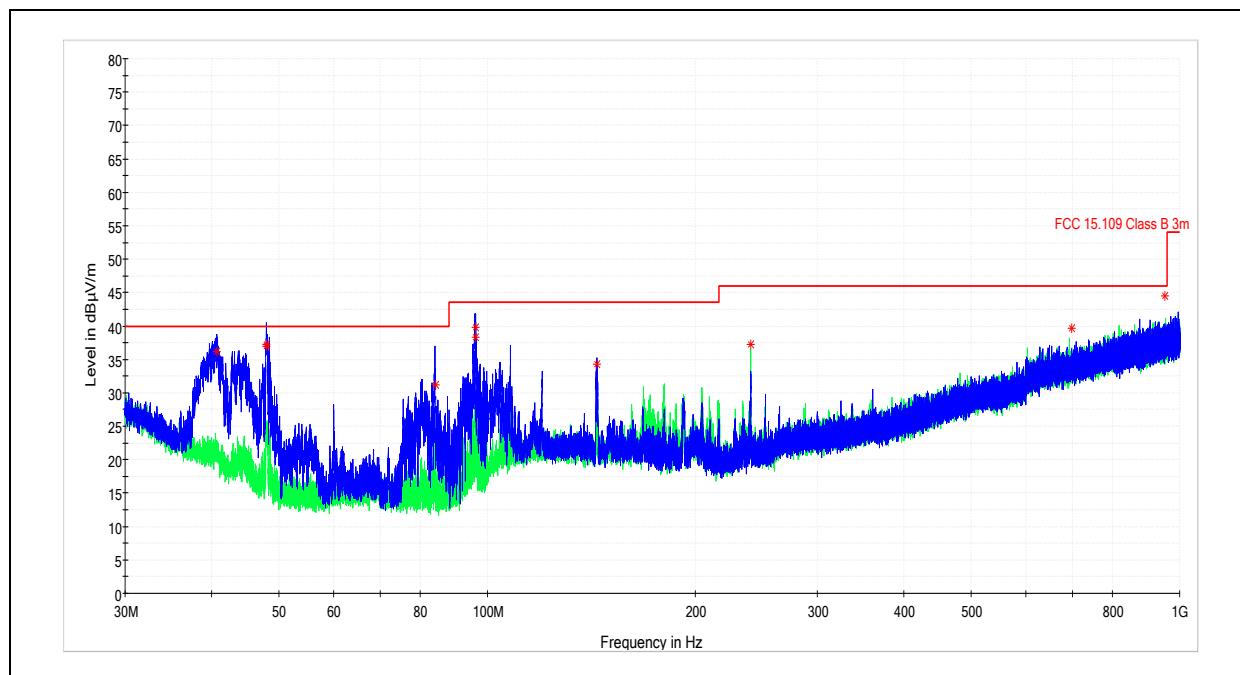**7.7.6 Spurious Emissions, 30MHz-1GHz:**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 40.689000       | 36.21              | 40.00          | 3.79        | 120.000         | 104.9       | V   | 318.0         | 19.6       |
| 47.955000       | 36.92              | 40.00          | 3.08        | 120.000         | 110.5       | V   | 302.0         | 15.7       |
| 47.988000       | 37.20              | 40.00          | 2.80        | 120.000         | 100.3       | V   | 292.0         | 15.7       |
| 84.169000       | 31.19              | 40.00          | 8.81        | 120.000         | 107.0       | V   | 8.0           | 14.9       |
| 96.166000       | 39.85              | 43.52          | 3.67        | 120.000         | 104.7       | V   | 311.0         | 17.3       |
| 96.206000       | 38.26              | 43.52          | 5.26        | 120.000         | 100.3       | V   | 311.0         | 17.3       |
| 144.160000      | 34.28              | 43.52          | 9.24        | 120.000         | 110.2       | V   | 10.0          | 21.0       |
| 240.040000      | 37.31              | 46.02          | 8.71        | 120.000         | 191.9       | H   | 202.0         | 20.7       |
| 697.780000      | 39.62              | 46.02          | 6.40        | 120.000         | 298.1       | H   | 202.0         | 31.9       |
| 952.480000      | 44.49              | 46.02          | 1.53        | 120.000         | 400.1       | H   | 1.0           | 35.4       |

Note: results shown represent the worst case of three channels under test

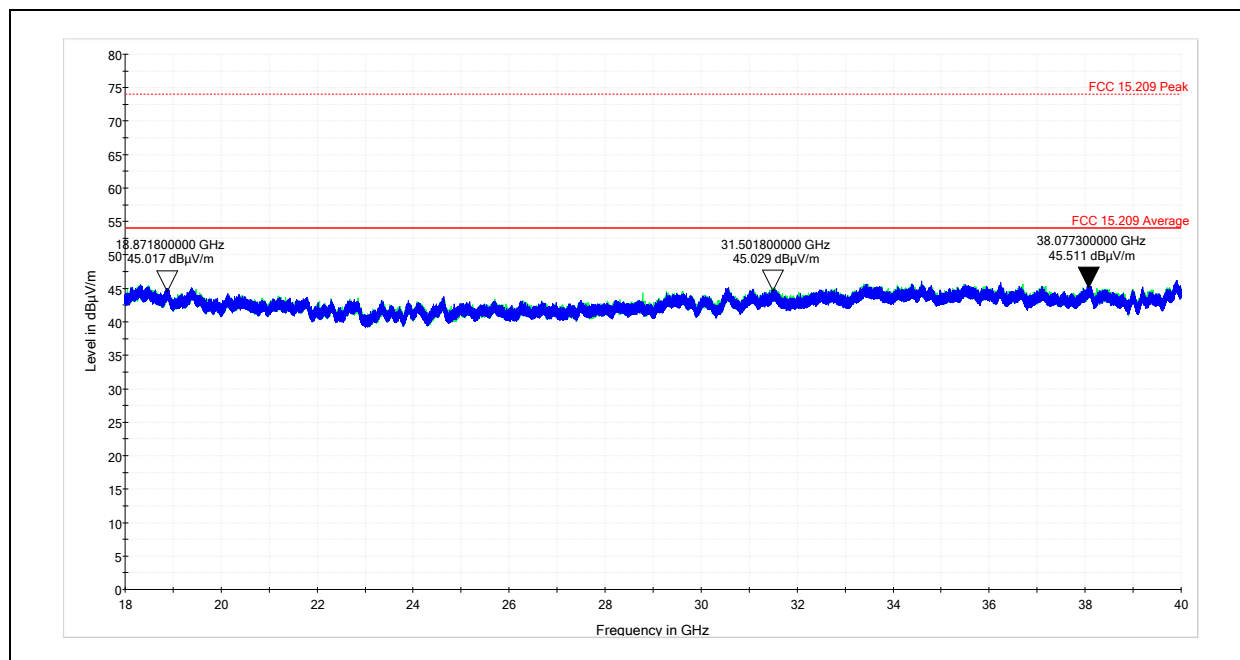


**7.7.7 Spurious Emissions, 18GHz-40GHz:**

Note: results shown represent the worst case of three channels under test. All observed peak emissions were below the average limit from FCC Title 47 CFR Part 15.209.




## 7.8 Test Data (AX26-202)

### 7.8.1 BLE Channel 0 (2402MHz) Spurious Emissions:

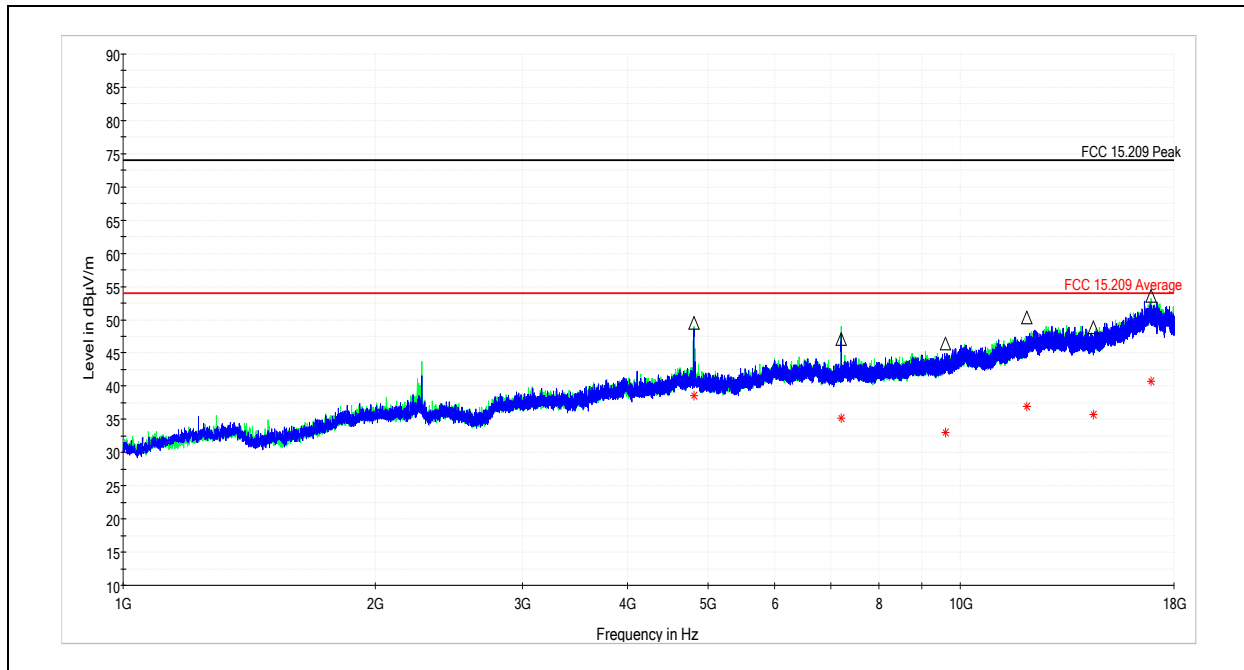


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4805.000000     | 49.46            | 74.00          | 24.54       | 1000.000        | 202.0       | H   | 93.0          | 7.3        |
| 7207.000000     | 47.13            | 74.00          | 26.87       | 1000.000        | 358.0       | H   | 170.0         | 10.2       |
| 9609.000000     | 46.35            | 74.00          | 27.65       | 1000.000        | 354.0       | V   | 165.0         | 13.0       |
| 12012.000000    | 50.31            | 74.00          | 23.69       | 1000.000        | 333.0       | V   | 170.0         | 16.3       |
| 14415.000000    | 48.90            | 74.00          | 25.10       | 1000.000        | 410.0       | H   | 184.0         | 16.5       |
| 16891.000000    | 53.63            | 74.00          | 20.37       | 1000.000        | 410.0       | H   | 304.0         | 21.8       |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4805.000000     | 38.55            | 54.00          | 15.45       | 1000.000        | 202.0       | H   | 93.0          | 7.3        |
| 7207.000000     | 35.15            | 54.00          | 18.85       | 1000.000        | 358.0       | H   | 170.0         | 10.2       |
| 9609.000000     | 33.07            | 54.00          | 20.93       | 1000.000        | 354.0       | V   | 165.0         | 13.0       |
| 12012.000000    | 36.98            | 54.00          | 17.02       | 1000.000        | 333.0       | V   | 170.0         | 16.3       |
| 14415.000000    | 35.75            | 54.00          | 18.25       | 1000.000        | 410.0       | H   | 184.0         | 16.5       |
| 16891.000000    | 40.71            | 54.00          | 13.29       | 1000.000        | 410.0       | H   | 304.0         | 21.8       |

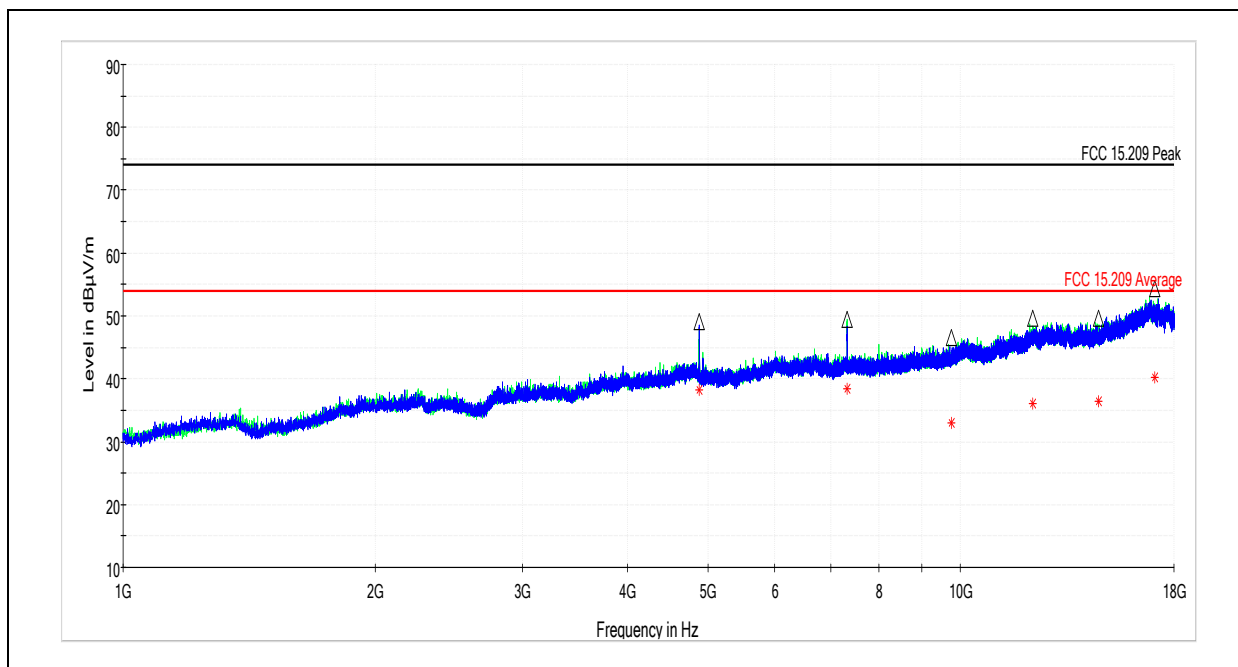**7.8.2 BLE Channel 19 (2440MHz) Spurious Emissions:**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4879.500000     | 49.03            | 74.00          | 24.97       | 1000.000        | 241.0       | V   | 197.0         | 6.8        |
| 7321.000000     | 49.40            | 74.00          | 24.60       | 1000.000        | 394.0       | H   | 194.0         | 10.5       |
| 9759.500000     | 46.51            | 74.00          | 27.49       | 1000.000        | 410.0       | V   | 252.0         | 13.1       |
| 12197.000000    | 49.69            | 74.00          | 24.31       | 1000.000        | 410.0       | H   | 315.0         | 16.5       |
| 14637.000000    | 49.55            | 74.00          | 24.45       | 1000.000        | 410.0       | H   | 139.0         | 16.9       |
| 17077.000000    | 54.30            | 74.00          | 19.70       | 1000.000        | 410.0       | H   | 57.0          | 21.6       |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4879.500000     | 38.20            | 54.00          | 15.80       | 1000.000        | 241.0       | V   | 197.0         | 6.8        |
| 7321.000000     | 38.41            | 54.00          | 15.59       | 1000.000        | 394.0       | H   | 194.0         | 10.5       |
| 9759.500000     | 32.92            | 54.00          | 21.08       | 1000.000        | 410.0       | V   | 252.0         | 13.1       |
| 12197.000000    | 36.07            | 54.00          | 17.93       | 1000.000        | 410.0       | H   | 315.0         | 16.5       |
| 14637.000000    | 36.34            | 54.00          | 17.66       | 1000.000        | 410.0       | H   | 139.0         | 16.9       |
| 17077.000000    | 40.29            | 54.00          | 13.71       | 1000.000        | 410.0       | H   | 57.0          | 21.6       |

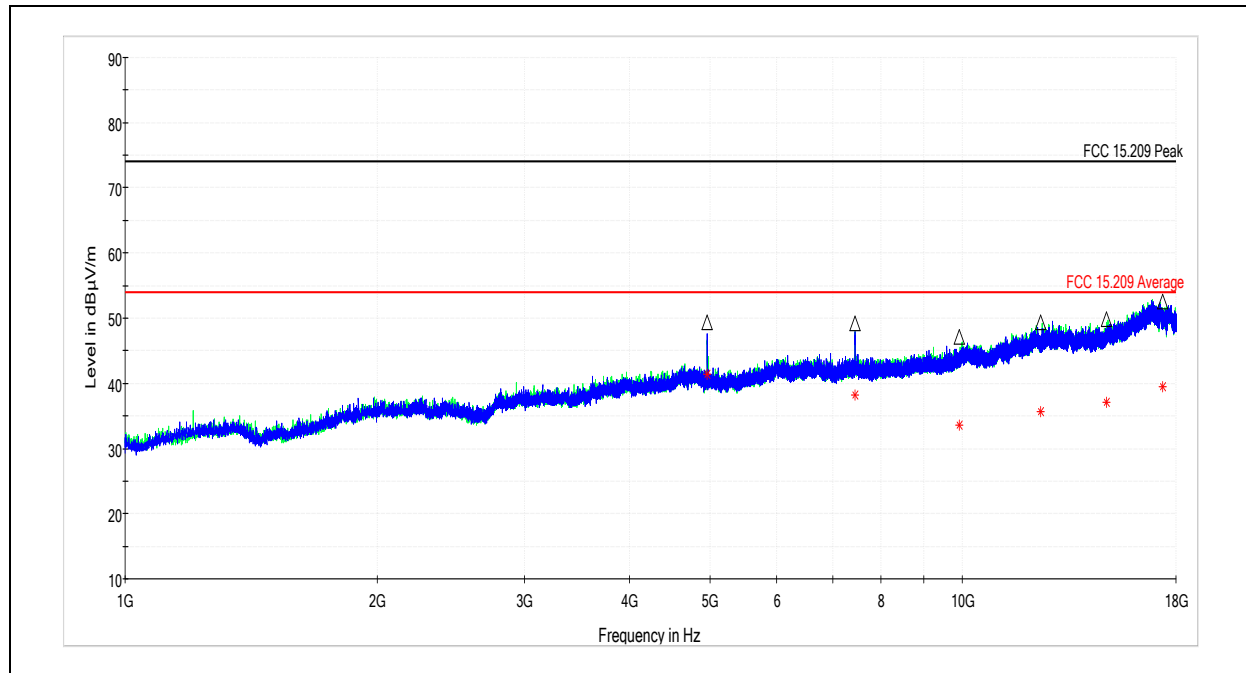
**7.8.3 BLE Channel 39 (2480MHz) Spurious Emissions:**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4960.500000     | 49.34            | 74.00          | 24.66       | 1000.000        | 263.0       | V   | 216.0         | 6.6        |
| 7441.000000     | 49.19            | 74.00          | 24.81       | 1000.000        | 261.0       | V   | 0.0           | 10.6       |
| 9919.500000     | 47.21            | 74.00          | 26.79       | 1000.000        | 193.0       | H   | 252.0         | 13.3       |
| 12406.000000    | 49.29            | 74.00          | 24.71       | 1000.000        | 374.0       | H   | 46.0          | 16.2       |
| 14880.500000    | 49.90            | 74.00          | 24.10       | 1000.000        | 393.0       | H   | 220.0         | 18.1       |
| 17362.000000    | 52.61            | 74.00          | 21.39       | 1000.000        | 370.0       | V   | 245.0         | 20.7       |


| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4960.500000     | 41.45            | 54.00          | 12.55       | 1000.000        | 263.0       | V   | 216.0         | 6.6        |
| 7441.000000     | 38.28            | 54.00          | 15.72       | 1000.000        | 261.0       | V   | 0.0           | 10.6       |
| 9919.500000     | 33.64            | 54.00          | 20.36       | 1000.000        | 193.0       | H   | 252.0         | 13.3       |
| 12406.000000    | 35.60            | 54.00          | 18.40       | 1000.000        | 374.0       | H   | 46.0          | 16.2       |
| 14880.500000    | 37.05            | 54.00          | 16.95       | 1000.000        | 393.0       | H   | 220.0         | 18.1       |
| 17362.000000    | 39.46            | 54.00          | 14.54       | 1000.000        | 370.0       | V   | 245.0         | 20.7       |




#### 7.8.4 Emissions at the low band edge:

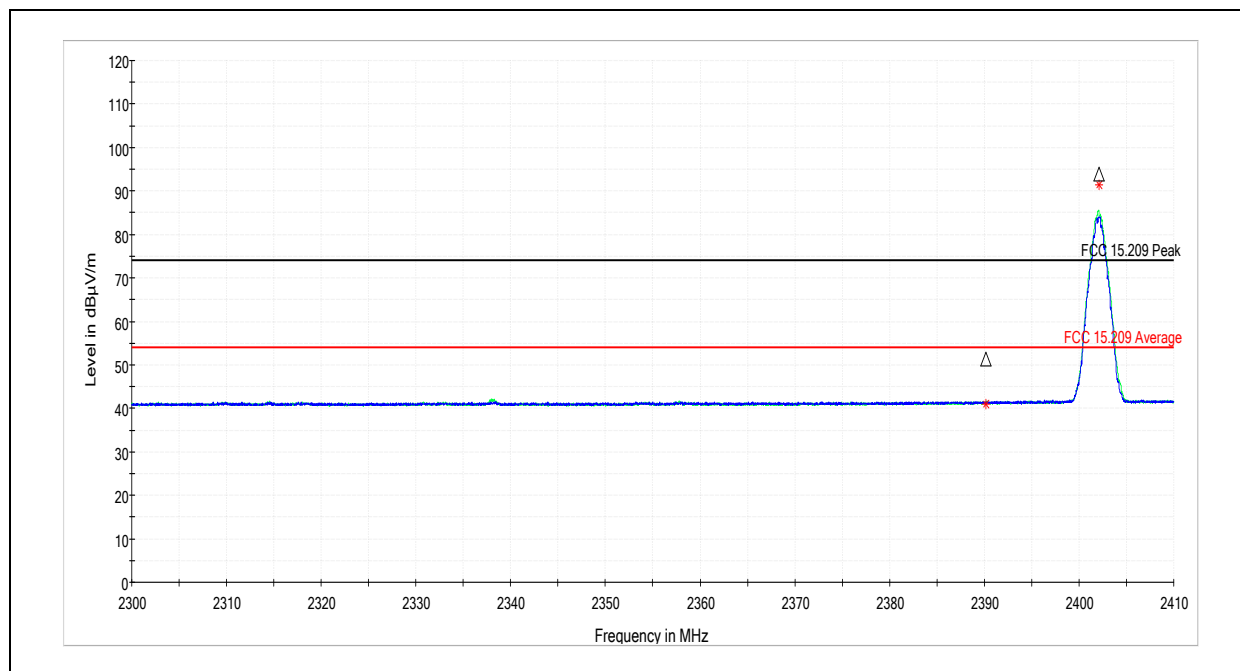

| Frequency (MHz) | Average (dBμV/m) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2390.200000     | ---              | 51.40            | 74.00          | 22.60       | 1000.000        | 312.0       | H   | 156.0         | 37.0       |
| 2390.200000     | 40.96            | ---              | 54.00          | 13.04       | 1000.000        | 312.0       | H   | 156.0         | 37.0       |

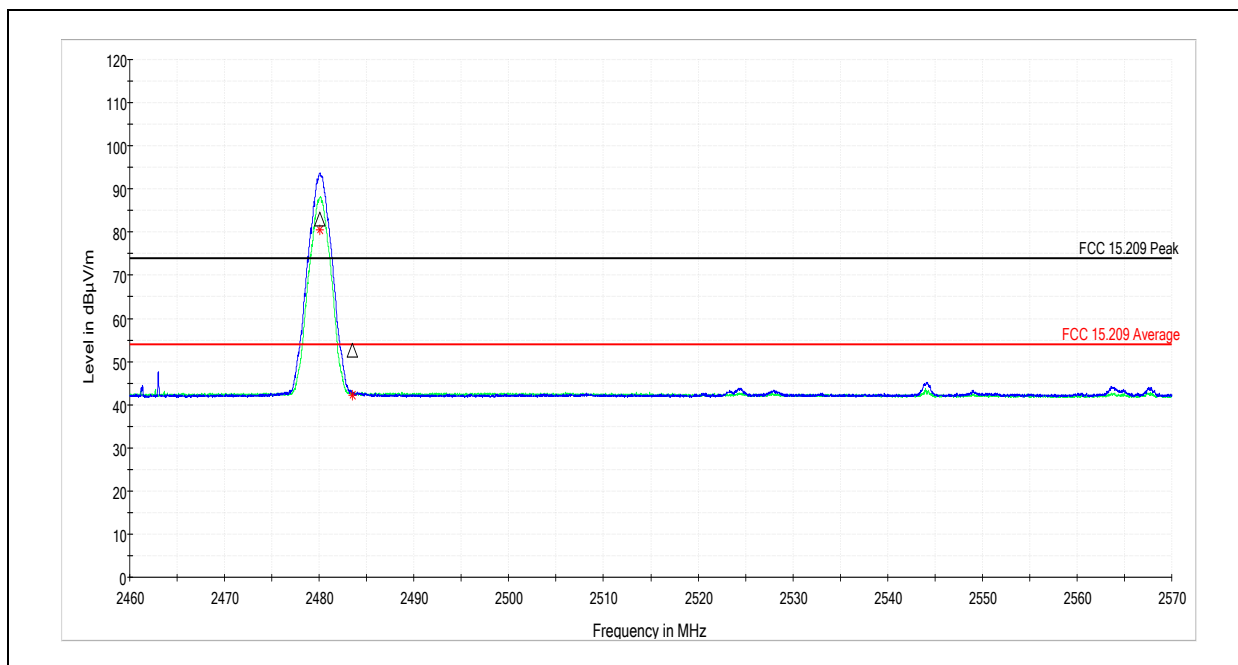
**7.8.5 Emissions at the high band edge:**

| Frequency (MHz) | Average (dBμV/m) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2483.496000     | 42.15            | ---              | 54.00          | 11.85       | 1000.000        | 189.0       | H   | 279.0         | 37.5       |
| 2483.496000     | ---              | 52.56            | 74.00          | 21.44       | 1000.000        | 189.0       | H   | 279.0         | 37.5       |

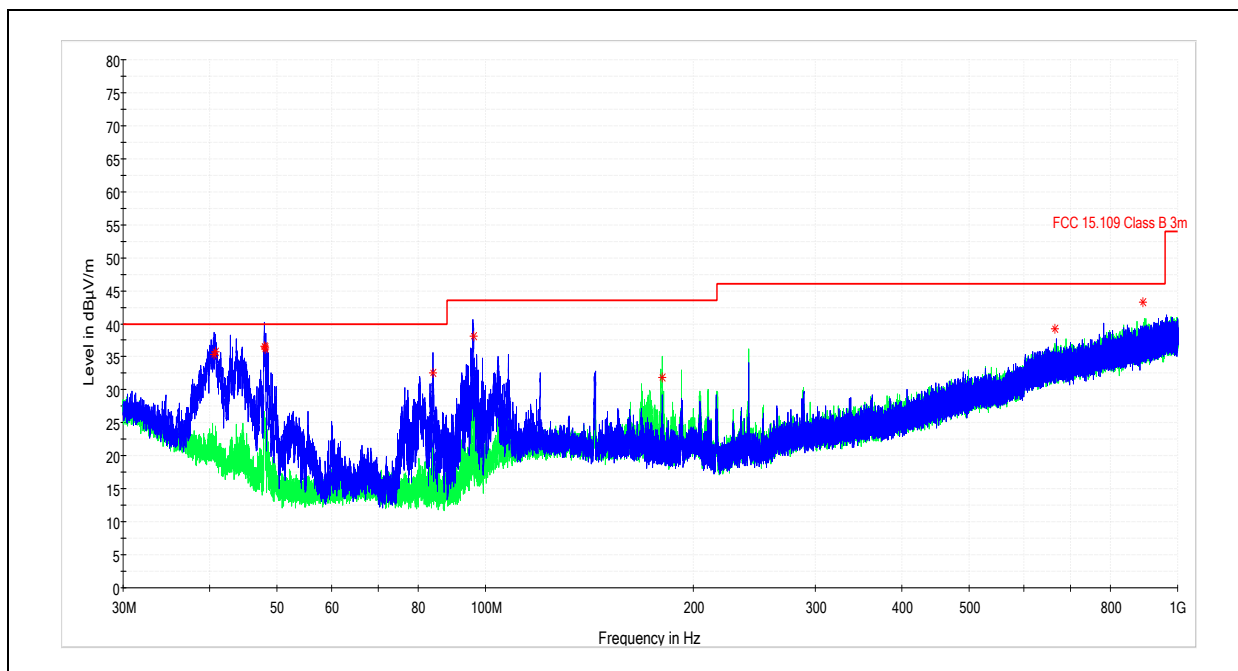**7.8.6 Spurious Emissions, 30MHz-1GHz:**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 40.579000       | 35.36              | 40.00          | 4.64        | 120.000         | 104.9       | V   | 301.0         | 19.7       |
| 40.767000       | 35.81              | 40.00          | 4.19        | 120.000         | 110.1       | V   | 293.0         | 19.6       |
| 48.019000       | 36.64              | 40.00          | 3.36        | 120.000         | 104.8       | V   | 302.0         | 15.7       |
| 48.052000       | 36.40              | 40.00          | 3.60        | 120.000         | 105.2       | V   | 291.0         | 15.7       |
| 48.091000       | 36.16              | 40.00          | 3.84        | 120.000         | 99.8        | V   | 283.0         | 15.7       |
| 84.098000       | 32.62              | 40.00          | 7.38        | 120.000         | 118.2       | V   | 8.0           | 14.9       |
| 96.172000       | 38.18              | 43.52          | 5.34        | 120.000         | 99.8        | V   | 156.0         | 17.3       |
| 180.080000      | 31.86              | 43.52          | 11.66       | 120.000         | 227.8       | H   | 0.0           | 19.9       |
| 664.180000      | 39.17              | 46.02          | 6.85        | 120.000         | 201.6       | V   | 182.0         | 31.4       |
| 891.680000      | 43.22              | 46.02          | 2.80        | 120.000         | 104.9       | H   | 282.0         | 34.8       |

Note: results shown represent the worst case of three channels under test

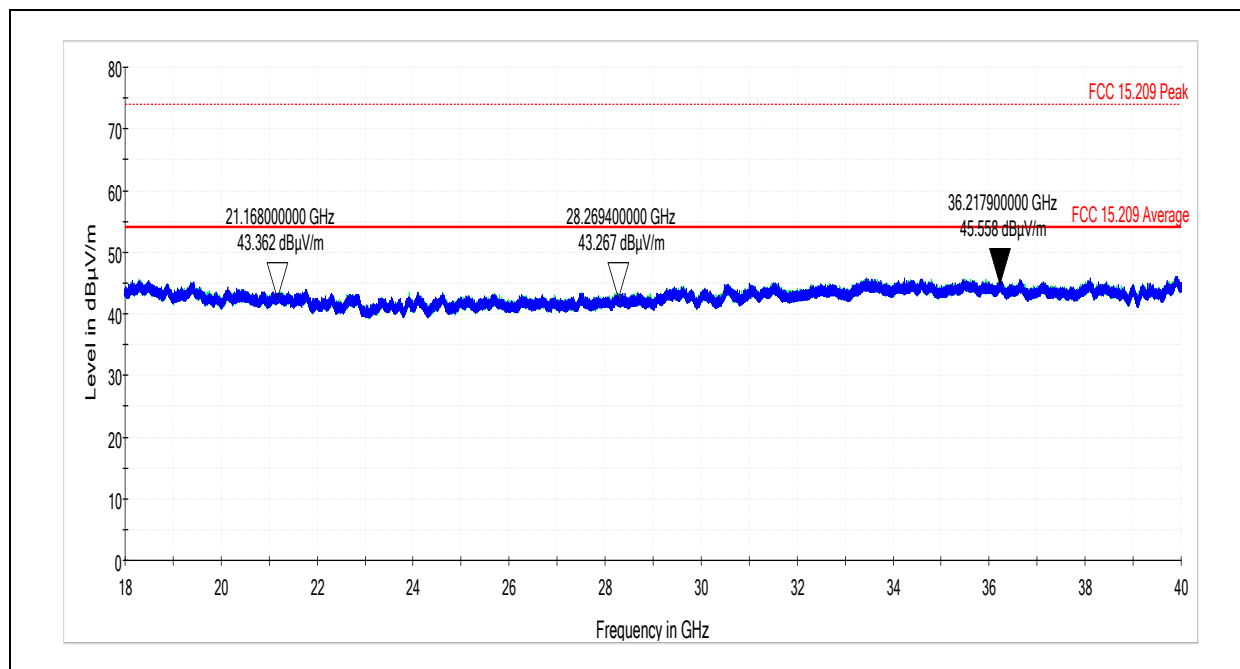**7.8.7 Spurious Emissions, 18GHz-40GHz:**


Note: results shown represent the worst case of three channels under test. All observed peak emissions were below the average limit from FCC Title 47 CFR Part 15.209.






## 7.9 Test Data (AX26-302)

### 7.9.1 BLE Channel 0 (2402MHz) Spurious Emissions:

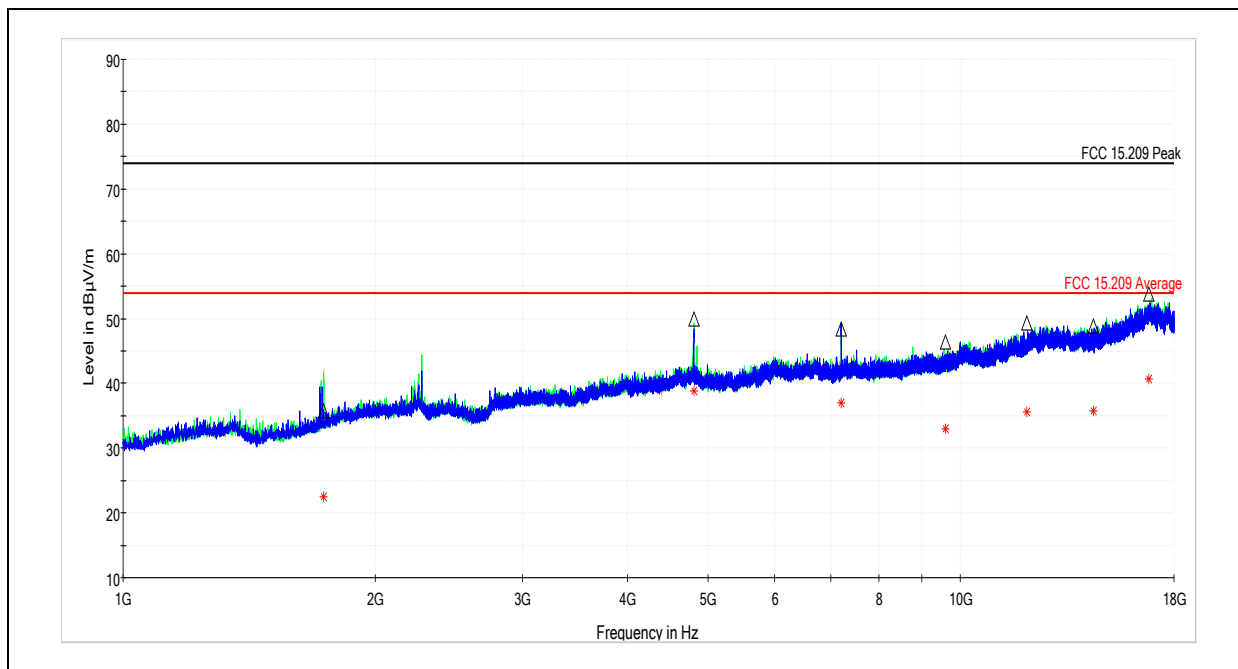


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 1736.500000     | 35.79            | 74.00          | 38.21       | 1000.000        | 410.0       | H   | 239.0         | -0.2       |
| 4805.000000     | 49.87            | 74.00          | 24.13       | 1000.000        | 221.0       | H   | 38.0          | 7.3        |
| 7207.500000     | 48.38            | 74.00          | 25.62       | 1000.000        | 185.0       | V   | 151.0         | 10.2       |
| 9609.000000     | 46.44            | 74.00          | 27.56       | 1000.000        | 396.0       | H   | 220.0         | 13.1       |
| 12010.000000    | 49.23            | 74.00          | 24.77       | 1000.000        | 304.0       | H   | 96.0          | 16.4       |
| 14413.000000    | 48.88            | 74.00          | 25.12       | 1000.000        | 410.0       | V   | 180.0         | 16.4       |
| 16811.500000    | 53.84            | 74.00          | 20.16       | 1000.000        | 410.0       | V   | 130.0         | 21.7       |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 1736.500000     | 22.50            | 54.00          | 31.50       | 1000.000        | 410.0       | H   | 239.0         | -0.2       |
| 4805.000000     | 38.86            | 54.00          | 15.14       | 1000.000        | 221.0       | H   | 38.0          | 7.3        |
| 7207.500000     | 36.96            | 54.00          | 17.04       | 1000.000        | 185.0       | V   | 151.0         | 10.2       |
| 9609.000000     | 32.97            | 54.00          | 21.03       | 1000.000        | 396.0       | H   | 220.0         | 13.1       |
| 12010.000000    | 35.60            | 54.00          | 18.40       | 1000.000        | 304.0       | H   | 96.0          | 16.4       |
| 14413.000000    | 35.73            | 54.00          | 18.27       | 1000.000        | 410.0       | V   | 180.0         | 16.4       |
| 16811.500000    | 40.69            | 54.00          | 13.31       | 1000.000        | 410.0       | V   | 130.0         | 21.7       |

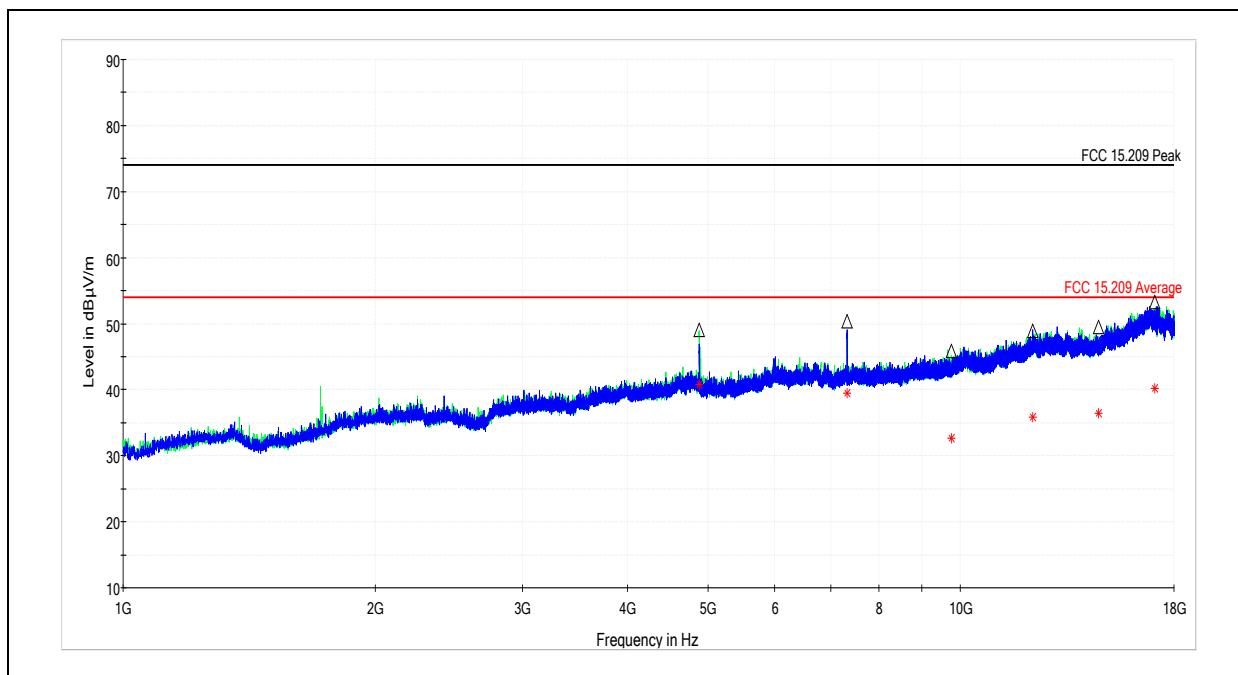**7.9.2 BLE Channel 19 (2440MHz) Spurious Emissions:**


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4880.000000     | 49.11            | 74.00          | 24.89       | 1000.000        | 192.0       | H   | 34.0          | 6.9        |
| 7319.000000     | 50.41            | 74.00          | 23.59       | 1000.000        | 209.0       | V   | 165.0         | 10.4       |
| 9757.500000     | 45.92            | 74.00          | 28.08       | 1000.000        | 410.0       | H   | 257.0         | 13.1       |
| 12196.500000    | 48.90            | 74.00          | 25.10       | 1000.000        | 335.0       | V   | 14.0          | 16.5       |
| 14638.500000    | 49.55            | 74.00          | 24.45       | 1000.000        | 410.0       | V   | 171.0         | 16.8       |
| 17079.500000    | 53.29            | 74.00          | 20.71       | 1000.000        | 410.0       | V   | 105.0         | 21.5       |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4880.000000     | 40.75            | 54.00          | 13.25       | 1000.000        | 192.0       | H   | 34.0          | 6.9        |
| 7319.000000     | 39.47            | 54.00          | 14.53       | 1000.000        | 209.0       | V   | 165.0         | 10.4       |
| 9757.500000     | 32.69            | 54.00          | 21.31       | 1000.000        | 410.0       | H   | 257.0         | 13.1       |
| 12196.500000    | 35.83            | 54.00          | 18.17       | 1000.000        | 335.0       | V   | 14.0          | 16.5       |
| 14638.500000    | 36.48            | 54.00          | 17.52       | 1000.000        | 410.0       | V   | 171.0         | 16.8       |
| 17079.500000    | 40.20            | 54.00          | 13.80       | 1000.000        | 410.0       | V   | 105.0         | 21.5       |

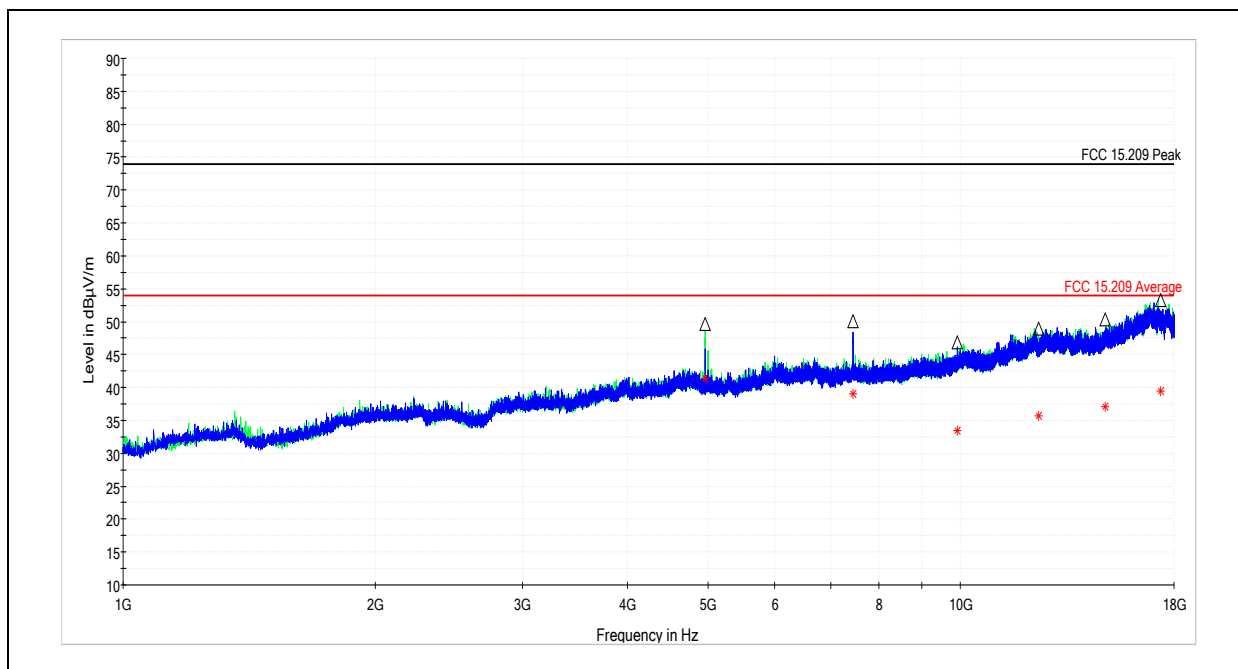
**7.9.3 BLE Channel 39 (2480MHz) Spurious Emissions:**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4960.500000     | 49.68            | 74.00          | 24.32       | 1000.000        | 256.0       | H   | 51.0          | 6.7        |
| 7441.000000     | 50.10            | 74.00          | 23.90       | 1000.000        | 209.0       | V   | 154.0         | 10.6       |
| 9918.500000     | 46.83            | 74.00          | 27.17       | 1000.000        | 370.0       | V   | 160.0         | 13.4       |
| 12407.000000    | 48.95            | 74.00          | 25.05       | 1000.000        | 410.0       | H   | 246.0         | 16.2       |
| 14885.000000    | 50.40            | 74.00          | 23.60       | 1000.000        | 410.0       | H   | 218.0         | 18.1       |
| 17358.000000    | 53.24            | 74.00          | 20.76       | 1000.000        | 410.0       | V   | 166.0         | 20.7       |


| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 4960.500000     | 41.43            | 54.00          | 12.57       | 1000.000        | 256.0       | H   | 51.0          | 6.7        |
| 7441.000000     | 39.03            | 54.00          | 14.97       | 1000.000        | 209.0       | V   | 154.0         | 10.6       |
| 9918.500000     | 33.43            | 54.00          | 20.57       | 1000.000        | 370.0       | V   | 160.0         | 13.4       |
| 12407.000000    | 35.67            | 54.00          | 18.33       | 1000.000        | 410.0       | H   | 246.0         | 16.2       |
| 14885.000000    | 37.11            | 54.00          | 16.89       | 1000.000        | 410.0       | H   | 218.0         | 18.1       |
| 17358.000000    | 39.52            | 54.00          | 14.48       | 1000.000        | 410.0       | V   | 166.0         | 20.7       |

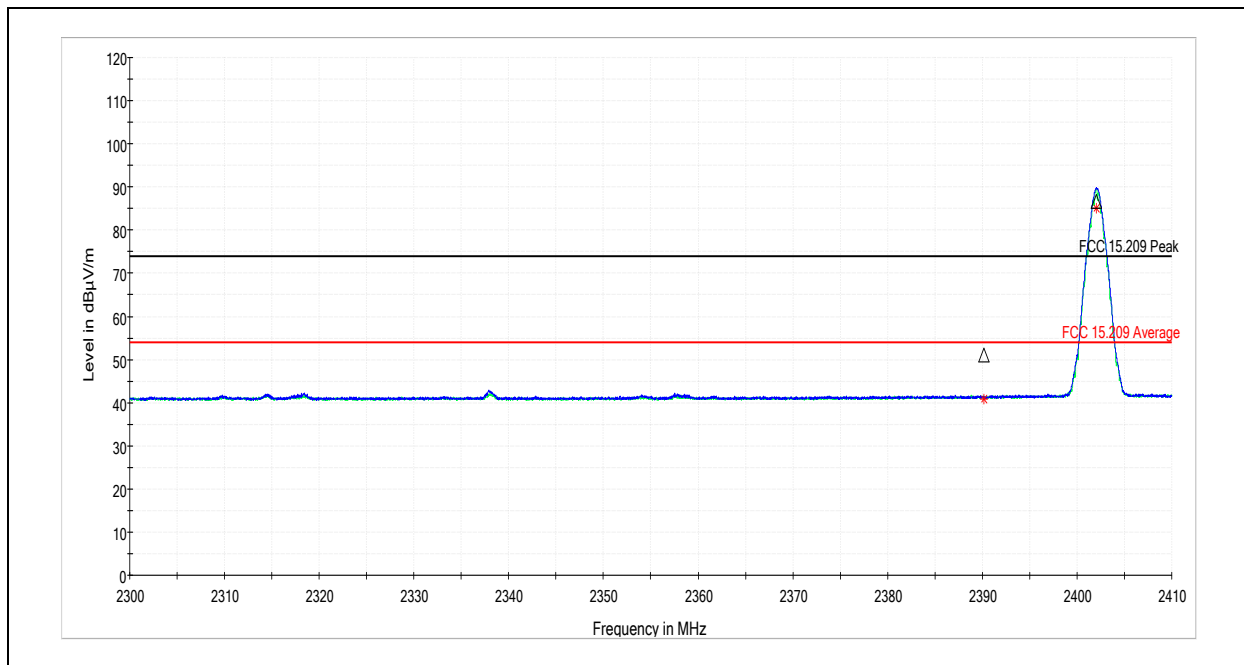**7.9.4 Emissions at the low band edge:**

| Frequency (MHz) | Average (dBμV/m) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2390.200000     | ---              | 51.05            | 74.00          | 22.95       | 1000.000        | 260.0       | H   | 203.0         | 37.0       |
| 2390.200000     | 40.77            | ---              | 54.00          | 13.23       | 1000.000        | 260.0       | H   | 203.0         | 37.0       |

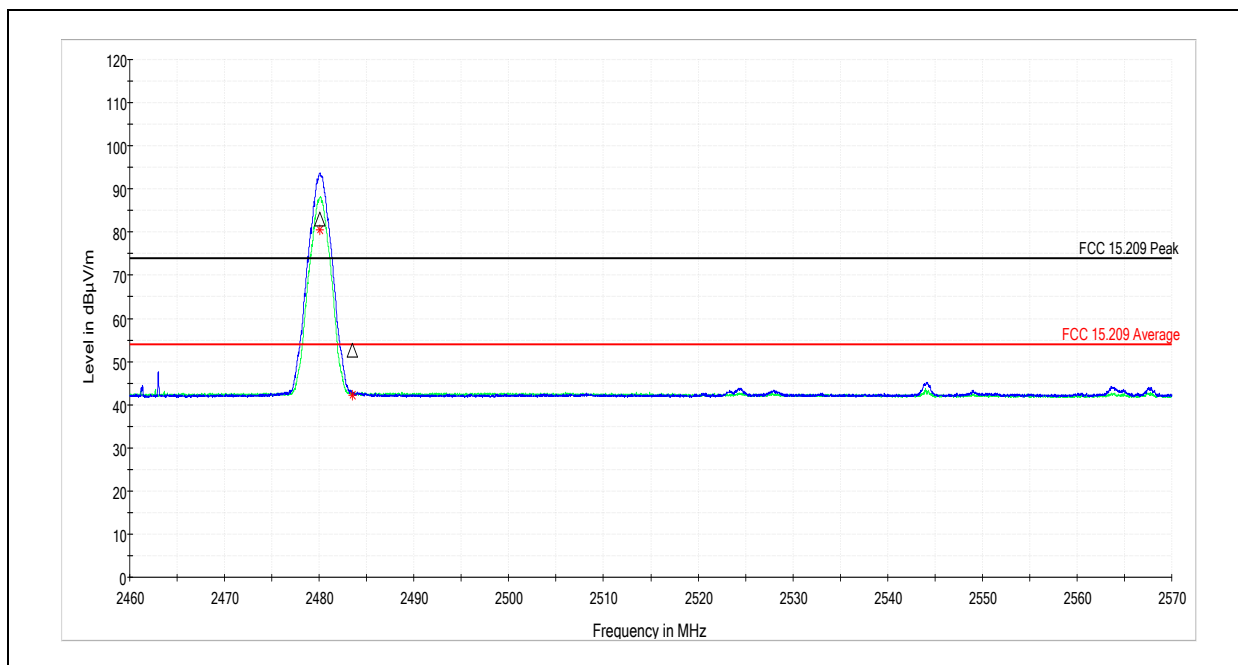
**7.9.5 Emissions at the high band edge:**

| Frequency (MHz) | Average (dBμV/m) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2483.496000     | 42.15            | ---              | 54.00          | 11.85       | 1000.000        | 189.0       | H   | 279.0         | 37.5       |
| 2483.496000     | ---              | 52.56            | 74.00          | 21.44       | 1000.000        | 189.0       | H   | 279.0         | 37.5       |

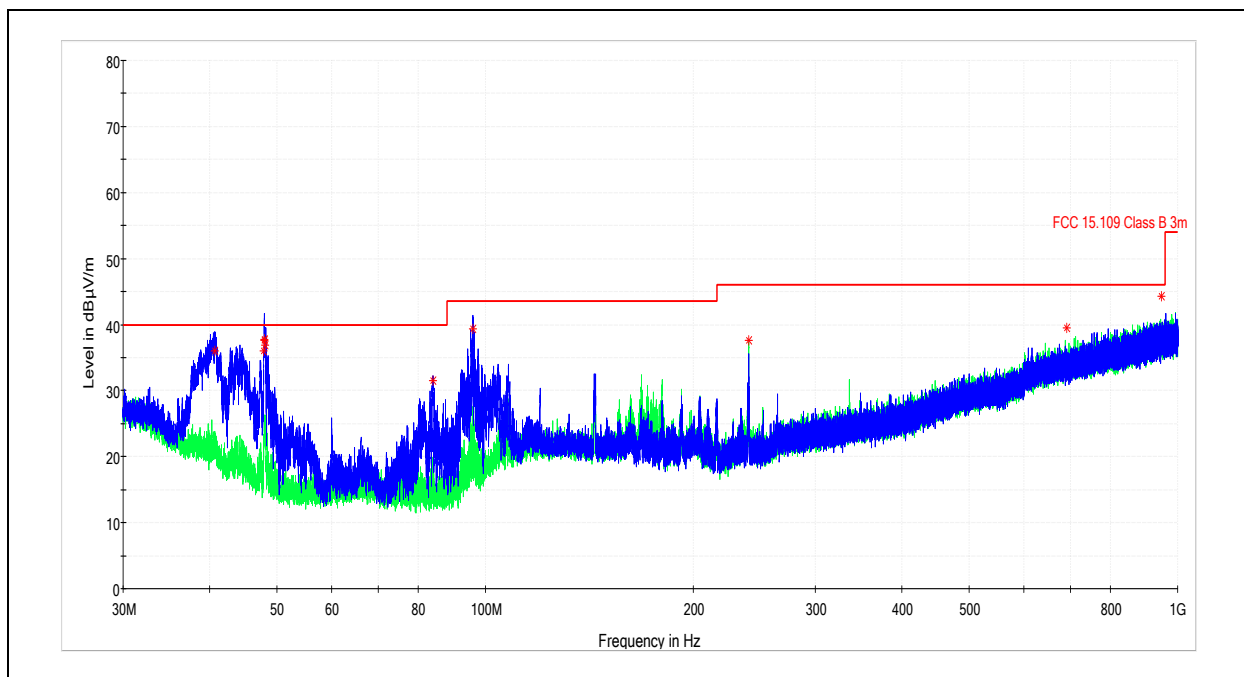**7.9.6 Spurious Emissions, 30MHz-1GHz:**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 40.698000       | 36.06              | 40.00          | 3.94        | 120.000         | 106.0       | V   | 0.0           | 19.6       |
| 47.915000       | 36.04              | 40.00          | 3.96        | 120.000         | 105.3       | V   | 348.0         | 15.7       |
| 47.988000       | 37.61              | 40.00          | 2.39        | 120.000         | 105.1       | V   | 312.0         | 15.7       |
| 47.993000       | 37.74              | 40.00          | 2.26        | 120.000         | 105.4       | V   | 302.0         | 15.7       |
| 48.096000       | 36.92              | 40.00          | 3.08        | 120.000         | 104.7       | V   | 319.0         | 15.7       |
| 84.132000       | 31.52              | 40.00          | 8.48        | 120.000         | 109.4       | V   | 10.0          | 14.9       |
| 96.094000       | 39.30              | 43.52          | 4.22        | 120.000         | 105.2       | V   | 110.0         | 17.3       |
| 240.020000      | 37.57              | 46.02          | 8.45        | 120.000         | 189.4       | H   | 18.0          | 20.7       |
| 692.310000      | 39.50              | 46.02          | 6.52        | 120.000         | 309.4       | H   | 0.0           | 31.8       |
| 947.720000      | 44.28              | 46.02          | 1.74        | 120.000         | 342.7       | H   | 111.0         | 35.4       |

Note: results shown represent the worst case of three channels under test

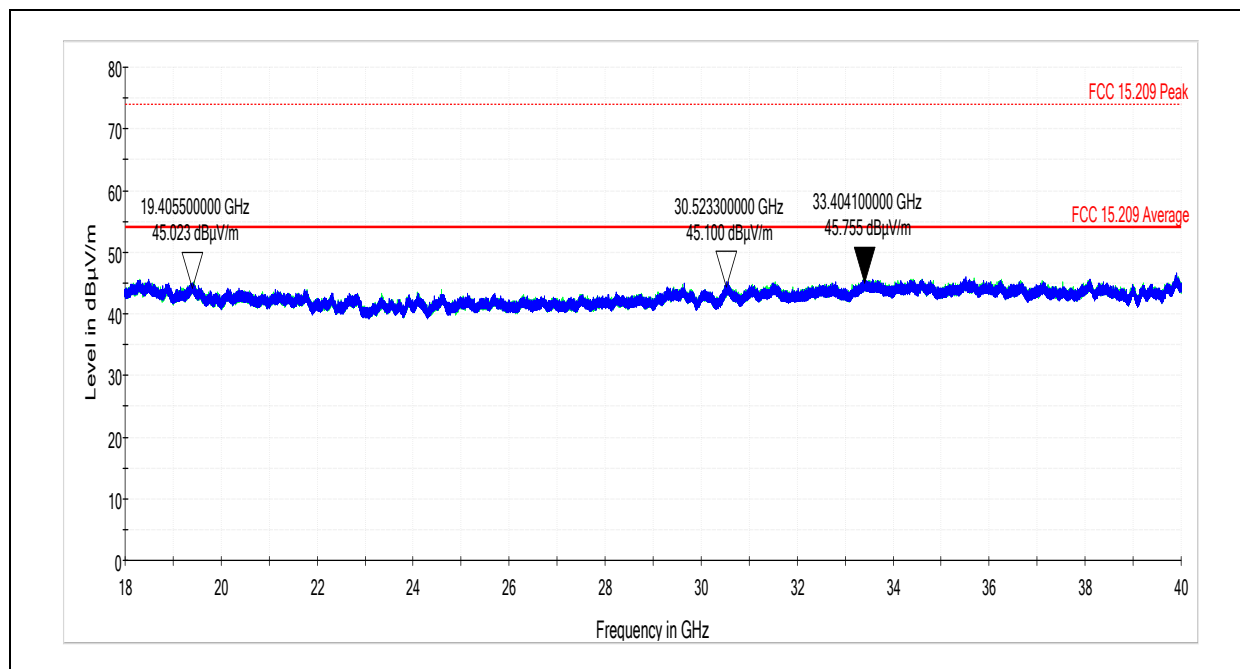**7.9.7 Spurious Emissions, 18GHz-40GHz:**

Note: results shown represent the worst case of three channels under test. All observed peak emissions were below the average limit from FCC Title 47 CFR Part 15.209.



## 8 Output Power

### 8.1 Test Limits

#### FCC Part 15.247(b)(3):

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

#### RSS-247 Issue 2 § 5.4(d):

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.





## 8.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.9.2.3.1 Method AVGPM.

## 8.3 Test Equipment Used

| Description           | Asset | Manufacturer  | Model   | Cal Date  | Cal Due   |
|-----------------------|-------|---------------|---------|-----------|-----------|
| Wideband Power Sensor | 4022  | Rohde&Schwarz | NRP-Z81 | 9/20/2017 | 9/20/2018 |

## 8.4 Test Results

The device was found to be **compliant**. The average output power was less than 1W.

## 8.5 Test Conditions

|                                  |                 |                       |           |
|----------------------------------|-----------------|-----------------------|-----------|
| Test Personnel:                  | B. Lackey       | Test Date:            | 8/29/2018 |
| Supervising/Reviewing Engineer:  |                 | Limit Applied:        | See Above |
| (Where Applicable)               | NA              |                       |           |
|                                  | FCC Part 15.247 | Ambient Temperature:  | 25.6C     |
| Product Standard:                | RSS-247 Issue 2 | Relative Humidity:    | 52.2%     |
| Input Voltage:                   | Battery         |                       |           |
| Pretest Verification w / Ambient |                 | Atmospheric Pressure: | 985.4mbar |
| Signals or BB Source:            | Yes             |                       |           |

**8.6 Test Data**

| Data Rate | Channel | Frequency (MHz) | Average Output Power (dBm) | Average Output Power (mW) | Limit (mW) | Result |
|-----------|---------|-----------------|----------------------------|---------------------------|------------|--------|
| 250kb/s   | 0       | 2402            | -0.29                      | 0.94                      | 1000       | Pass   |
|           | 19      | 2440            | -0.19                      | 0.96                      | 1000       | Pass   |
|           | 39      | 2480            | -0.32                      | 0.93                      | 1000       | Pass   |
| 1Mb/s     | 0       | 2402            | -0.46                      | 0.90                      | 1000       | Pass   |
|           | 19      | 2440            | -0.36                      | 0.92                      | 1000       | Pass   |
|           | 39      | 2480            | -0.50                      | 0.89                      | 1000       | Pass   |
| 2Mb/s     | 0       | 2402            | -0.69                      | 0.85                      | 1000       | Pass   |
|           | 19      | 2440            | -0.59                      | 0.87                      | 1000       | Pass   |
|           | 39      | 2480            | -0.72                      | 0.85                      | 1000       | Pass   |

Deviations, Additions, or Exclusions: None



## 9 Occupied Bandwidth

### 9.1 Test Limits

#### FCC Part 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### RSS-247 Issue 2 § 5.2(a):

The minimum 6 dB bandwidth shall be 500 kHz.

### 9.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.8.1 and § 6.9.3.

### 9.3 Test Equipment Used

| Description       | Asset | Manufacturer    | Model | Cal Date  | Cal Due   |
|-------------------|-------|-----------------|-------|-----------|-----------|
| EMI Test Receiver | 2327  | Rohde & Schwarz | ESi26 | 9/20/2017 | 9/20/2018 |

### 9.4 Test Results







The device was found to be **compliant**. The 6dB bandwidth was at least 500kHz.



### 9.5 Test Conditions

|                                  |                 |                       |           |
|----------------------------------|-----------------|-----------------------|-----------|
| Test Personnel:                  | B. Lackey       | Test Date:            | 8/29/2018 |
| Supervising/Reviewing Engineer:  |                 | Limit Applied:        | See Above |
| (Where Applicable)               | NA              | Ambient Temperature:  | 25.6C     |
| Product Standard:                | FCC Part 15.247 | Relative Humidity:    | 52.2%     |
| Input Voltage:                   | Battery         | Atmospheric Pressure: | 985.4mbar |
| Pretest Verification w / Ambient |                 |                       |           |
| Signals or BB Source:            | Yes             |                       |           |



**9.6 Test Data**

| Data Rate | Channel | Frequency (MHz) | 6dB BW (kHz)<br>RBW = 100kHz | 20dB BW (kHz)<br>RBW = 100kHz | 99% BW (kHz)<br>RBW = 100kHz | 99% BW (kHz)<br>RBW = 1-5% OBW |
|-----------|---------|-----------------|------------------------------|-------------------------------|------------------------------|--------------------------------|
| 250kb/s   | 0       | 2402            | 501.0                        | 737.5                         | 621.2                        | 503.2                          |
|           | 19      | 2440            | 501.0                        | 741.5                         | 625.3                        | 503.2                          |
|           | 39      | 2480            | 501.0                        | 741.5                         | 629.3                        | 509.6                          |
| 1Mb/s     | 0       | 2402            | 516.0                        | 1162                          | 997.0                        | 923.1                          |
|           | 19      | 2440            | 516.0                        | 1167                          | 1002                         | 945.5                          |
|           | 39      | 2480            | 511.0                        | 1157                          | 997.0                        | 916.7                          |
| 2Mb/s     | 0       | 2402            | 889.8                        | 2050                          | 1844                         | 1835                           |
|           | 19      | 2440            | 849.7                        | 2028                          | 1860                         | 1771                           |
|           | 39      | 2480            | 801.6                        | 2092                          | 1844                         | 1795                           |

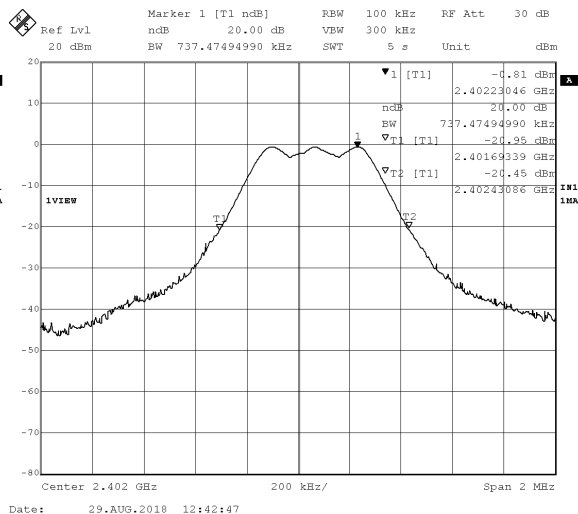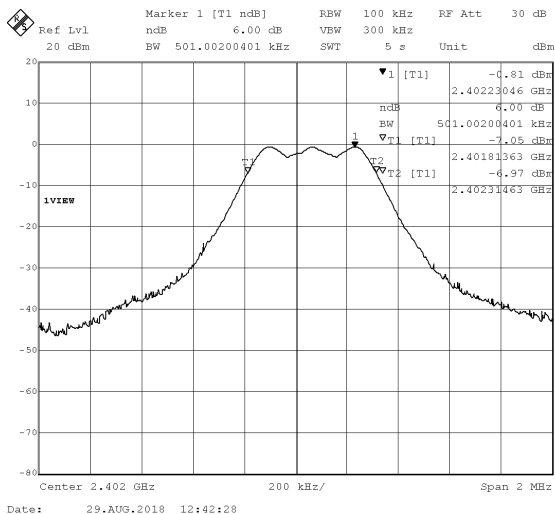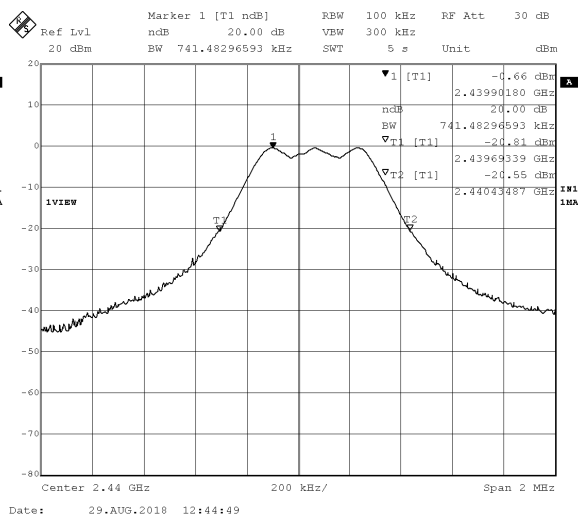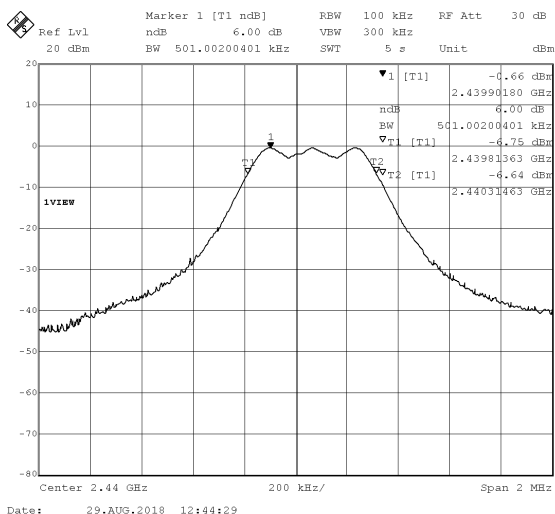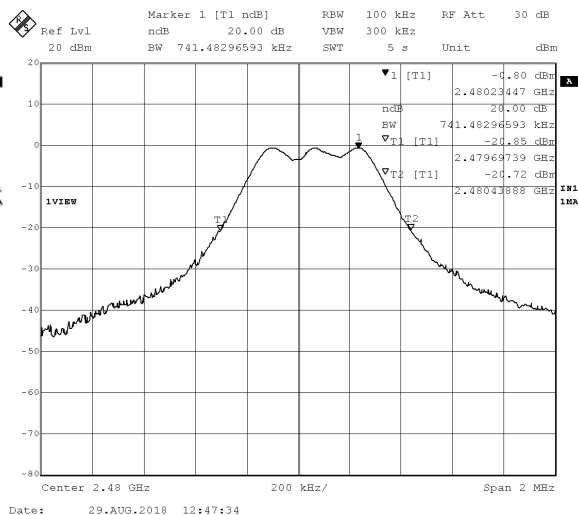
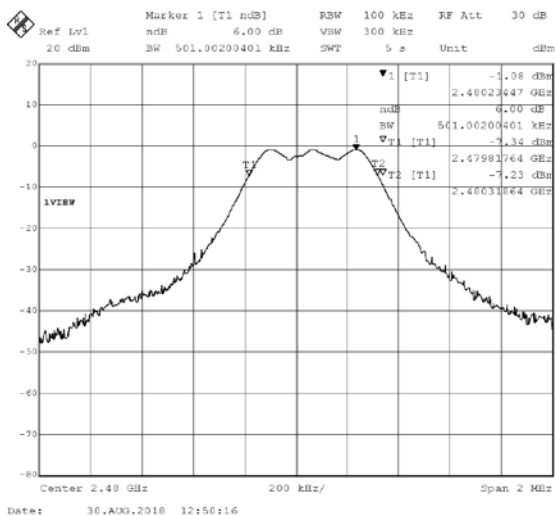
**250kb/s Channel 0 (2402MHz) 6dB BW (left) and 20dB BW (right)****250kb/s Channel 19 (2440MHz) 6dB BW (left) and 20dB BW (right)****250kb/s Channel 39 (2480MHz) 6dB BW (left) and 20dB BW (right)**

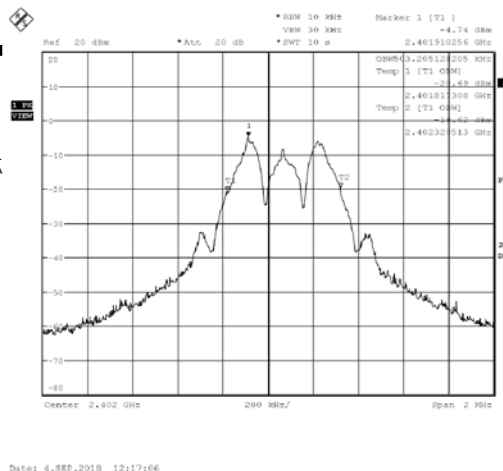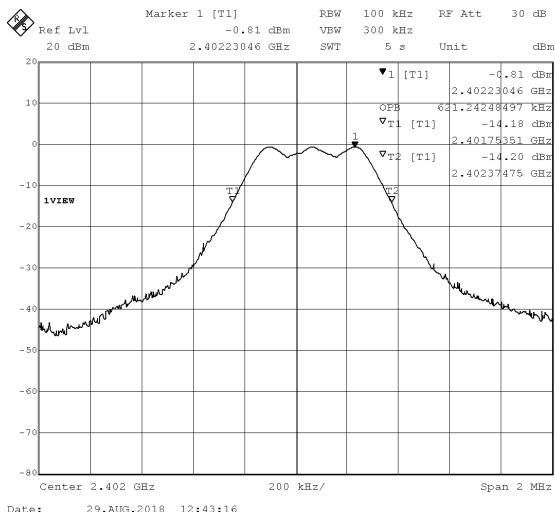

250kb/s Channel 0 (2402MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)

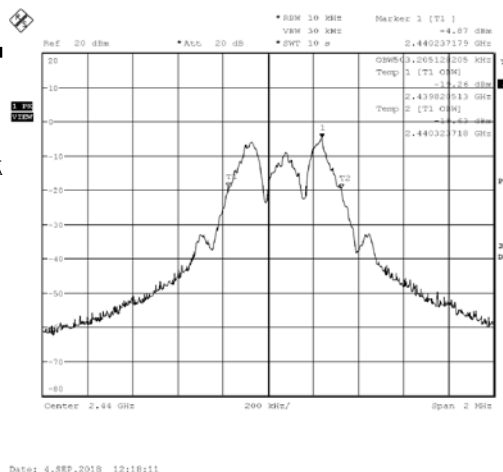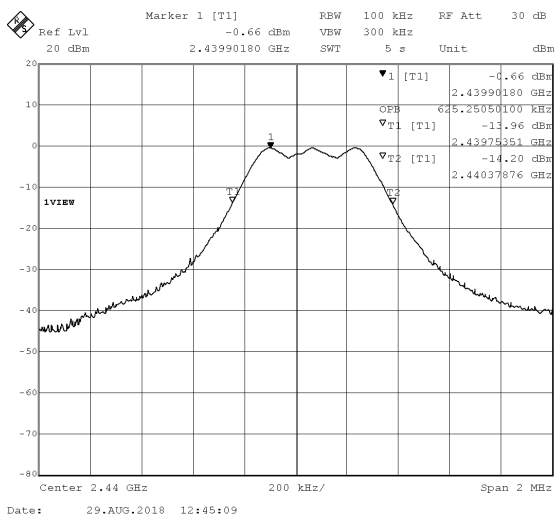


250kb/s Channel 19 (2440MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)

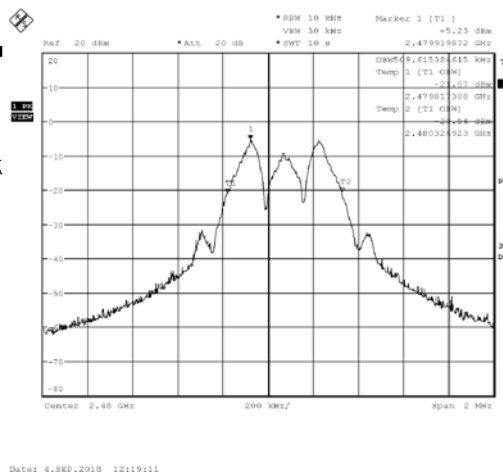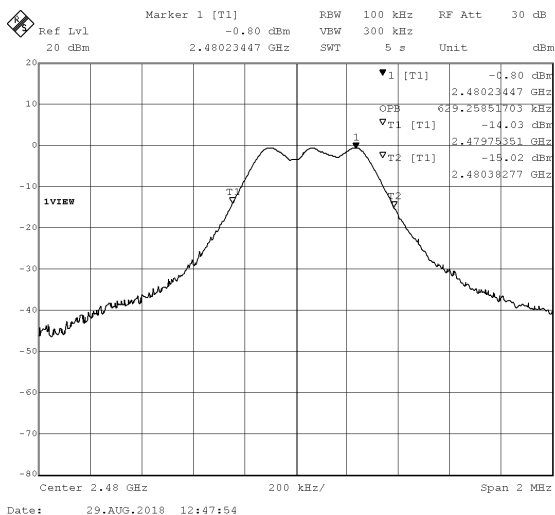


250kb/s Channel 39 (2480MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)

Deviations, Additions, or Exclusions: None

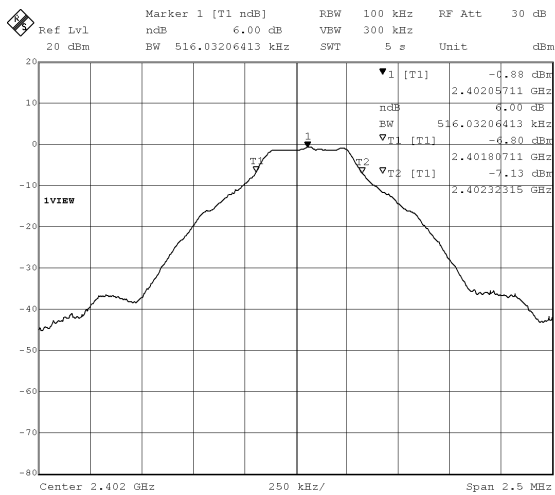


Date: 29.AUG.2018 12:50:14

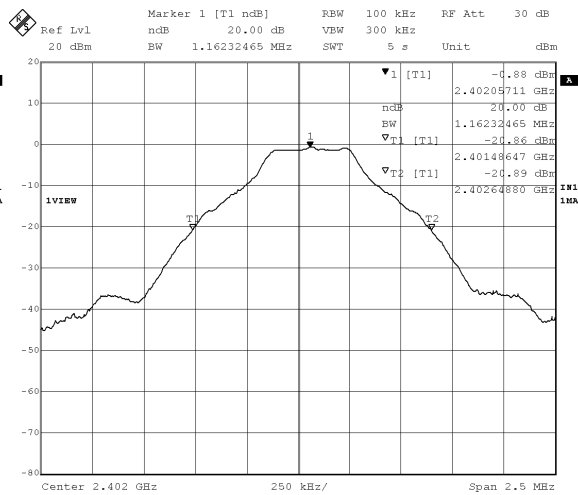


Date: 29.AUG.2018 12:50:35

1Mb/s Channel 0 (2402MHz) 6dB BW (left) and 20dB BW (right)

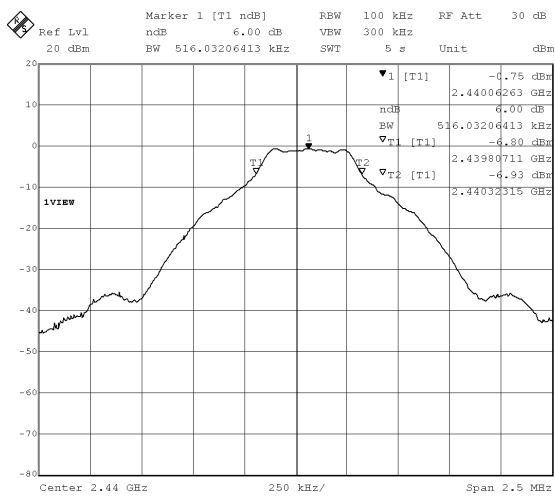


Date: 29.AUG.2018 12:51:50

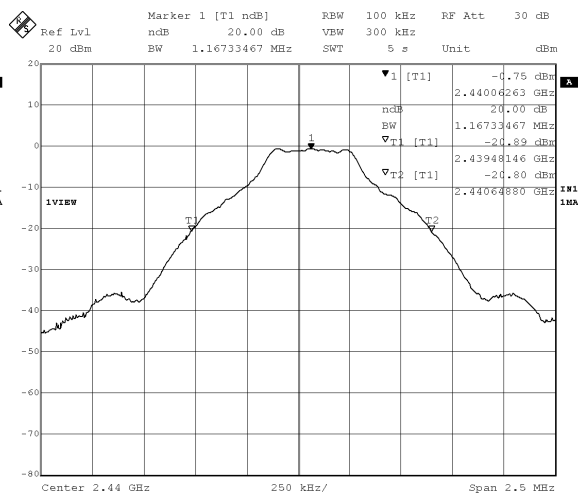


Date: 29.AUG.2018 12:52:10

1Mb/s Channel 19 (2440MHz) 6dB BW (left) and 20dB BW (right)

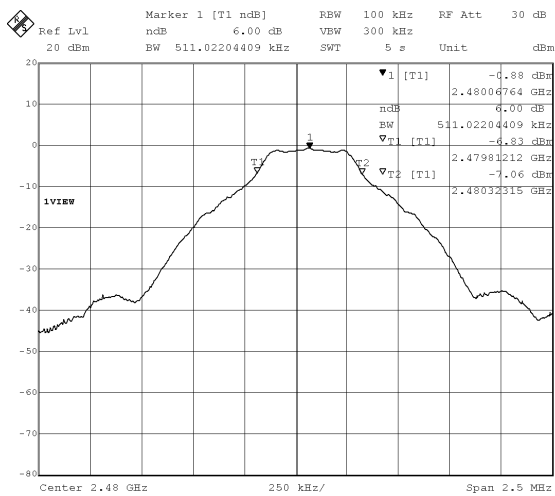


Date: 29.AUG.2018 12:53:15

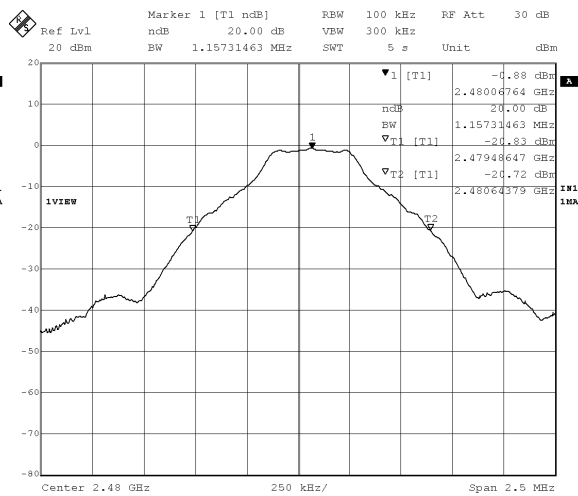


Date: 29.AUG.2018 12:53:33


1Mb/s Channel 39 (2480MHz) 6dB BW (left) and 20dB BW (right)

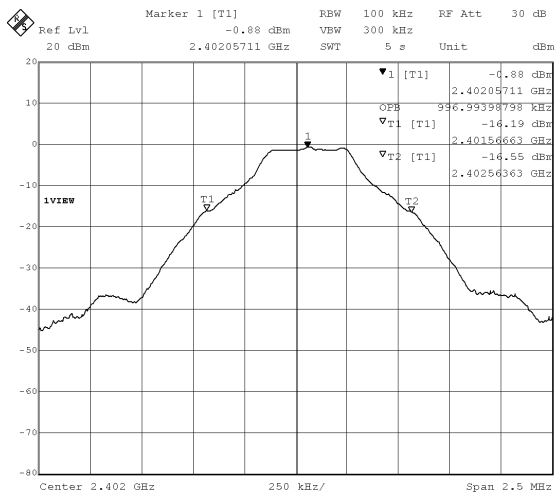


Date: 29.AUG.2018 12:50:54

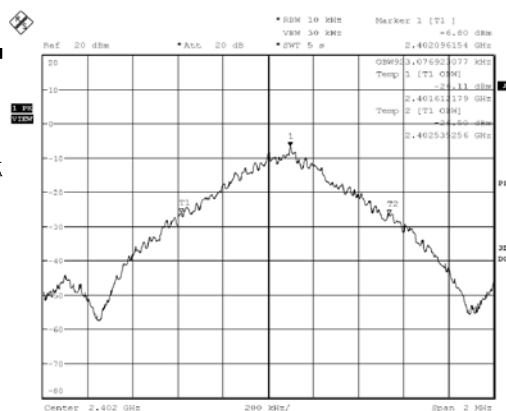


Date: 4.SEP.2018 12:21:48

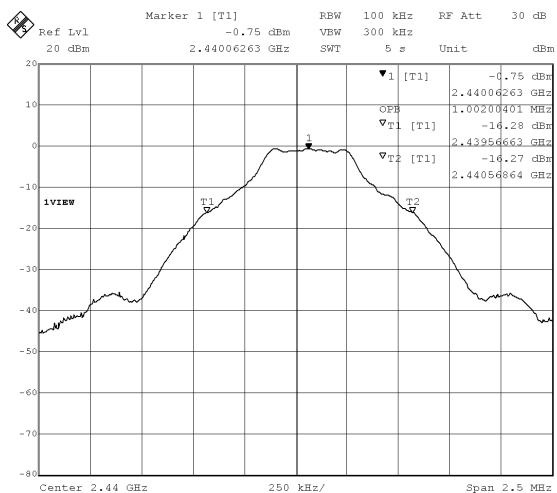**1Mb/s Channel 0 (2402MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)**


Date: 29.AUG.2018 12:52:26

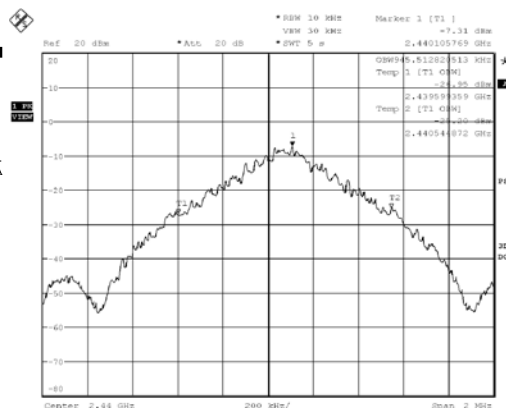

Date: 4.SEP.2018 12:22:41

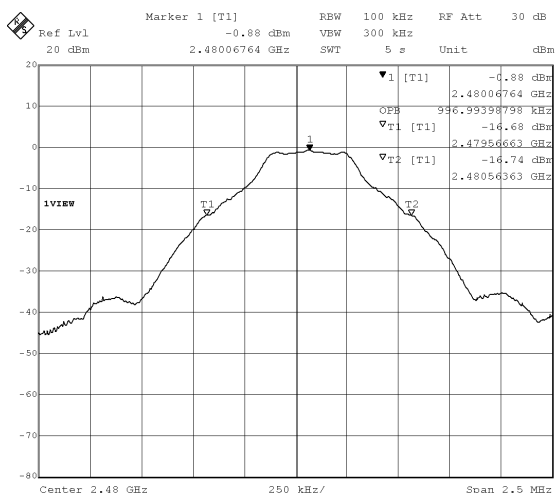**1Mb/s Channel 19 (2440MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)**

Date: 29.AUG.2018 12:53:49

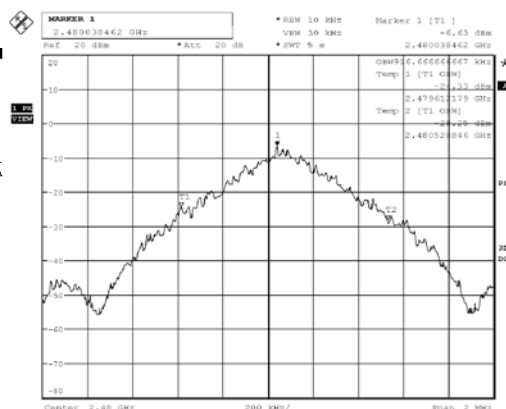


Date: 4.SEP.2018 12:23:24



**1Mb/s Channel 39 (2480MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)**

Deviations, Additions, or Exclusions: None





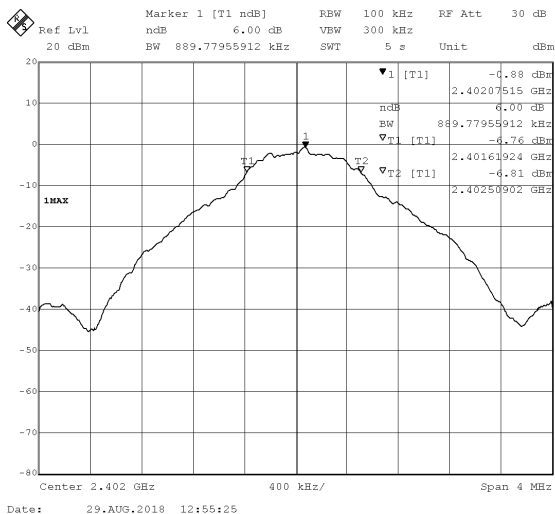


2Mb/s Channel 0 (2402MHz) 6dB BW (left) and 20dB BW (right)

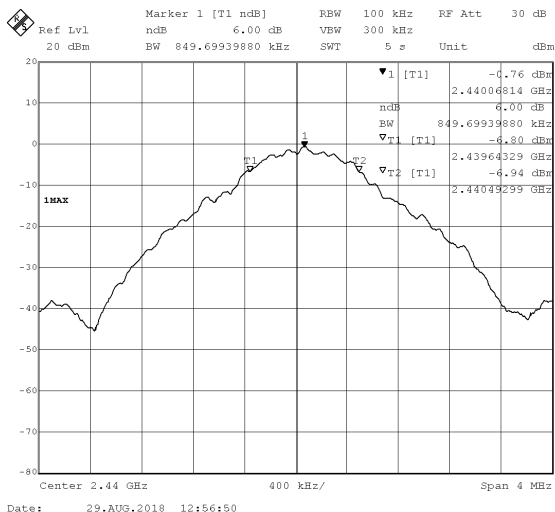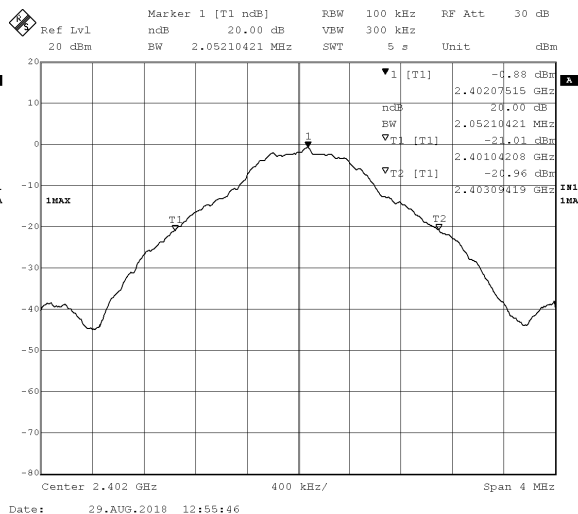


2Mb/s Channel 19 (2440MHz) 6dB BW (left) and 20dB BW (right)

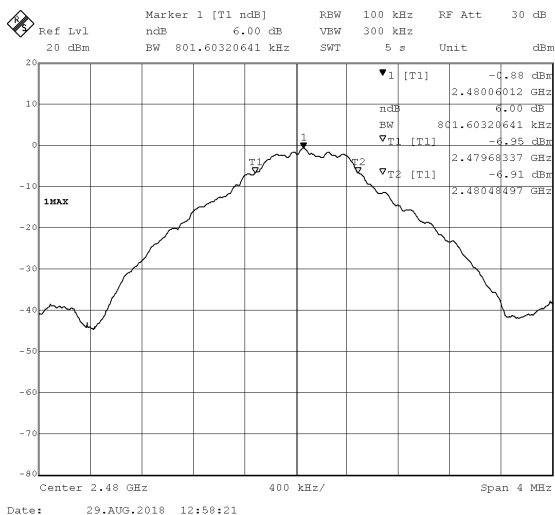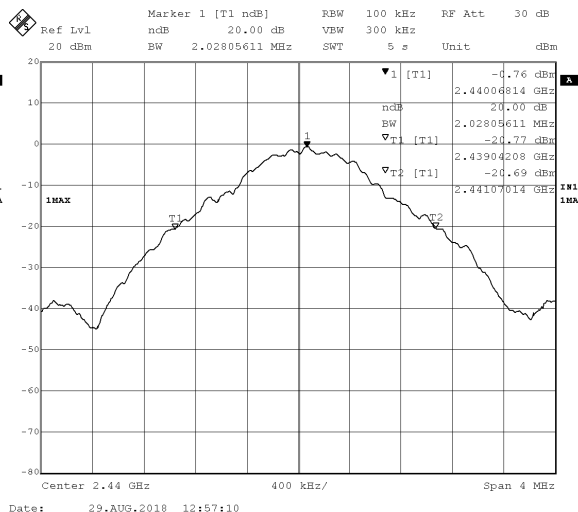


2Mb/s Channel 39 (2480MHz) 6dB BW (left) and 20dB BW (right)

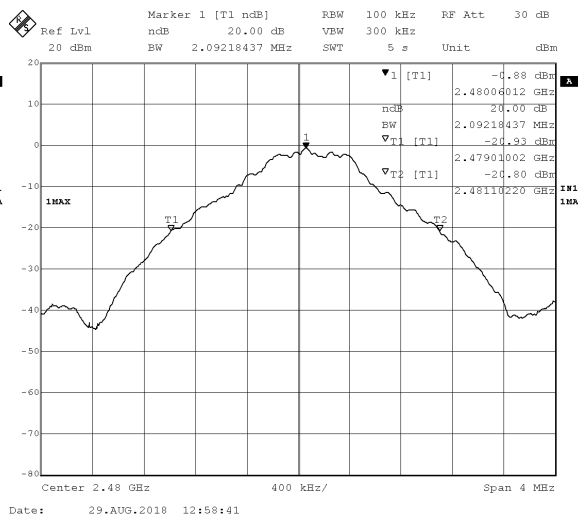


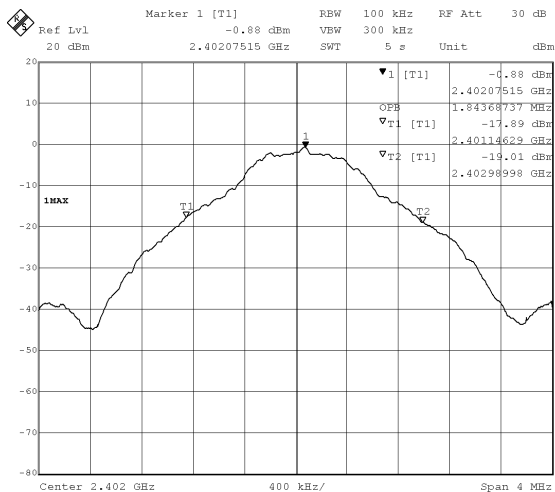


Date: 29.AUG.2018 12:56:09

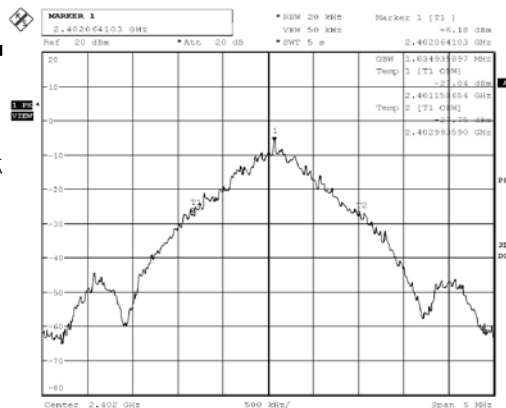**2Mb/s Channel 0 (2402MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)**


Date: 4.SEP.2018 12:25:24

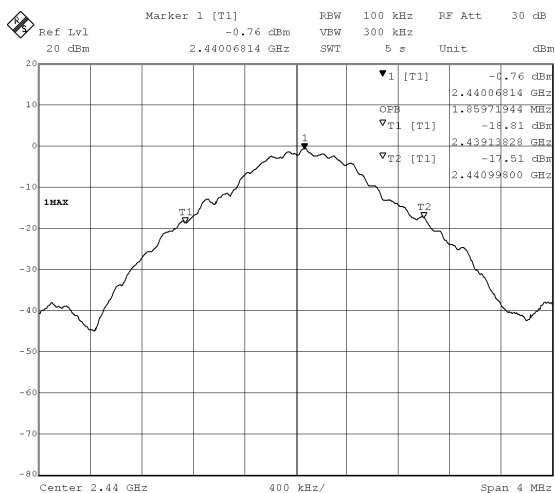


Date: 29.AUG.2018 12:57:27

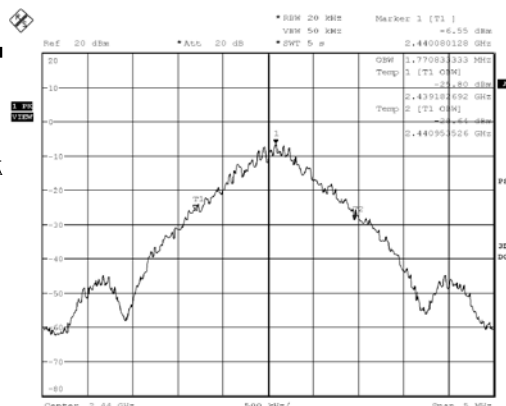**2Mb/s Channel 19 (2440MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)**

Date: 4.SEP.2018 12:26:36

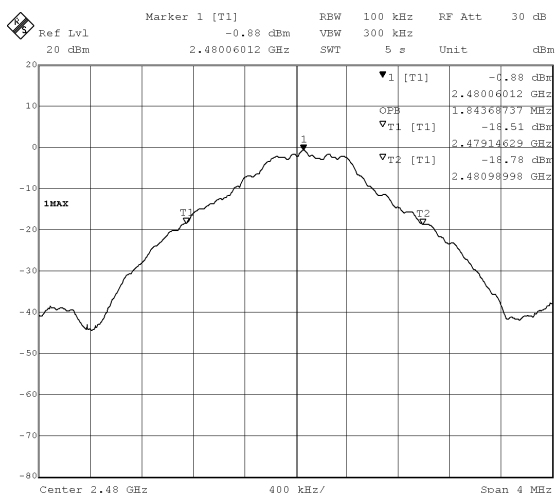

Date: 29.AUG.2018 12:59:00

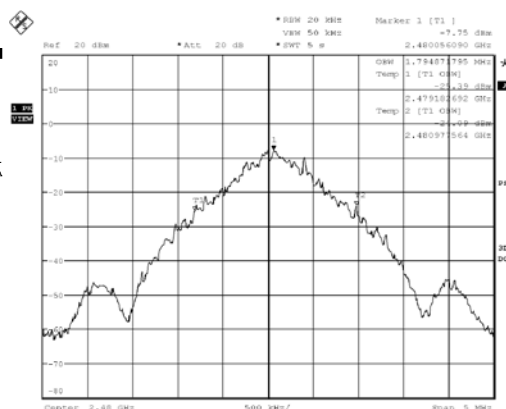**2Mb/s Channel 39 (2480MHz) 99% BW RBW=100kHz (left) and RBW=1-5% OBW (right)**

Date: 4.SEP.2018 12:27:27

Deviations, Additions, or Exclusions: None



## 10 Power Spectral Density

### 10.1 Test Limits

#### FCC Part 15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### RSS-247 Issue 2 § 5.2(b):

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 10.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.10.2 Method PKPSD (peak PSD).

### 10.3 Test Equipment Used

| Description       | Asset | Manufacturer    | Model | Cal Date  | Cal Due   |
|-------------------|-------|-----------------|-------|-----------|-----------|
| EMI Test Receiver | 2327  | Rohde & Schwarz | ES126 | 9/20/2017 | 9/20/2018 |

### 10.4 Test Results

The device was found to be **compliant**. The peak power spectral density was less than 8dBm.


### 10.5 Test Conditions

|                                  |                 |                       |           |
|----------------------------------|-----------------|-----------------------|-----------|
| Test Personnel:                  | B. Lackey       | Test Date:            | 8/29/2018 |
| Supervising/Reviewing Engineer:  |                 | Limit Applied:        | See Above |
| (Where Applicable)               | NA              | Ambient Temperature:  | 25.6C     |
| Product Standard:                | FCC Part 15.247 | Relative Humidity:    | 52.2%     |
| Input Voltage:                   | Battery         | Atmospheric Pressure: | 985.4mbar |
| Pretest Verification w / Ambient |                 |                       |           |
| Signals or BB Source:            | Yes             |                       |           |


**10.6 Test Data**

| Data Rate | Channel | Frequency (MHz) | RBW (kHz) | PPSD (dBm) | Limit (dBm EIRP) | Result |
|-----------|---------|-----------------|-----------|------------|------------------|--------|
| 250kb/s   | 0       | 2402            | 3         | -9.432     | 8                | Pass   |
|           | 19      | 2440            | 3         | -9.241     | 8                | Pass   |
|           | 39      | 2480            | 3         | -8.895     | 8                | Pass   |
| 1Mb/s     | 0       | 2402            | 3         | -11.698    | 8                | Pass   |
|           | 19      | 2440            | 3         | -9.729     | 8                | Pass   |
|           | 39      | 2480            | 3         | -11.228    | 8                | Pass   |
| 2Mb/s     | 0       | 2402            | 3         | -12.619    | 8                | Pass   |
|           | 19      | 2440            | 3         | -14.478    | 8                | Pass   |
|           | 39      | 2480            | 3         | -14.287    | 8                | Pass   |


Deviations, Additions, or Exclusions: None.

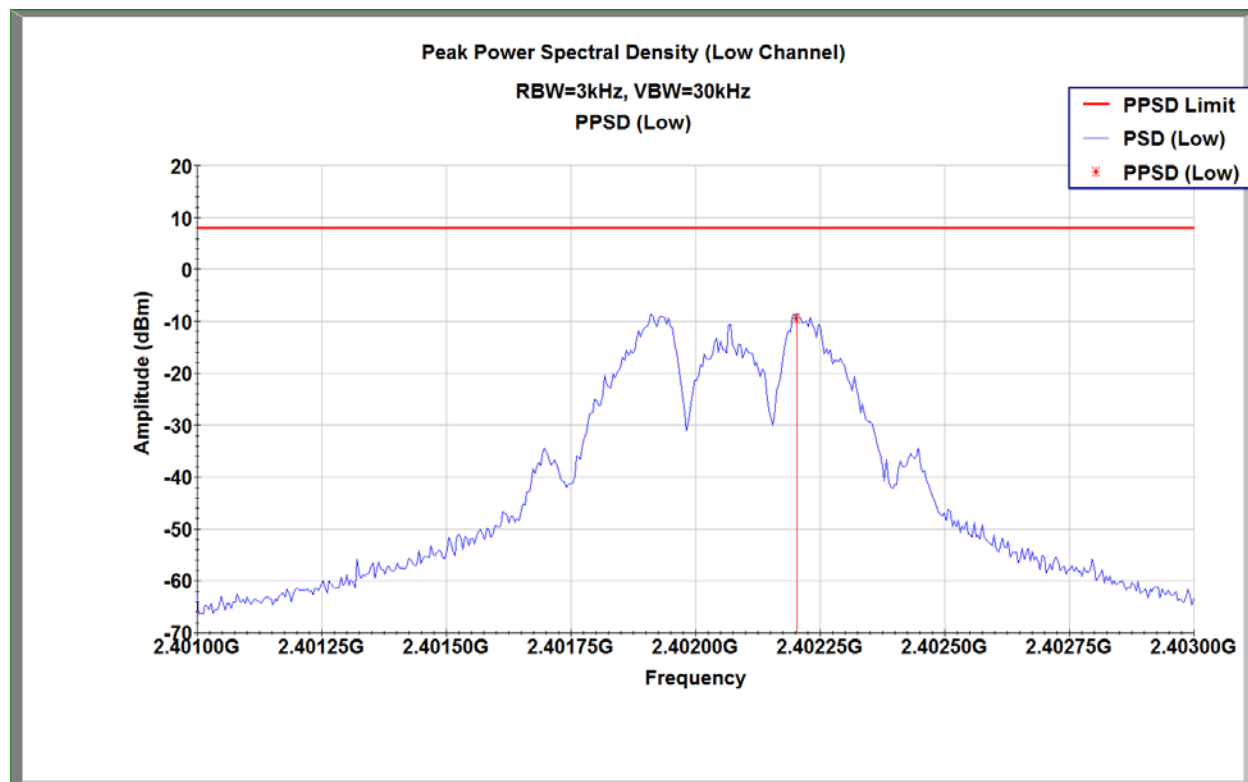


250kb/s Ch 0 (2402MHz) PPSP

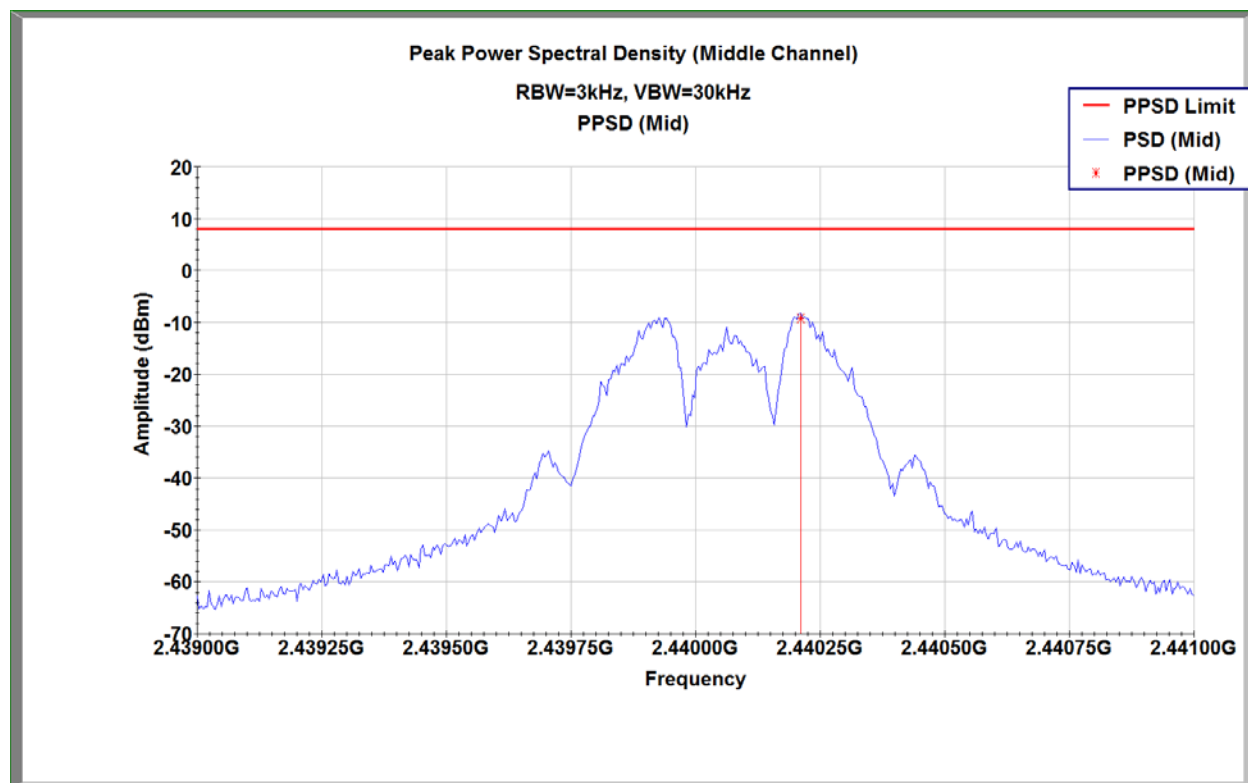


250kb/s Ch 19 (2440MHz) PPSP

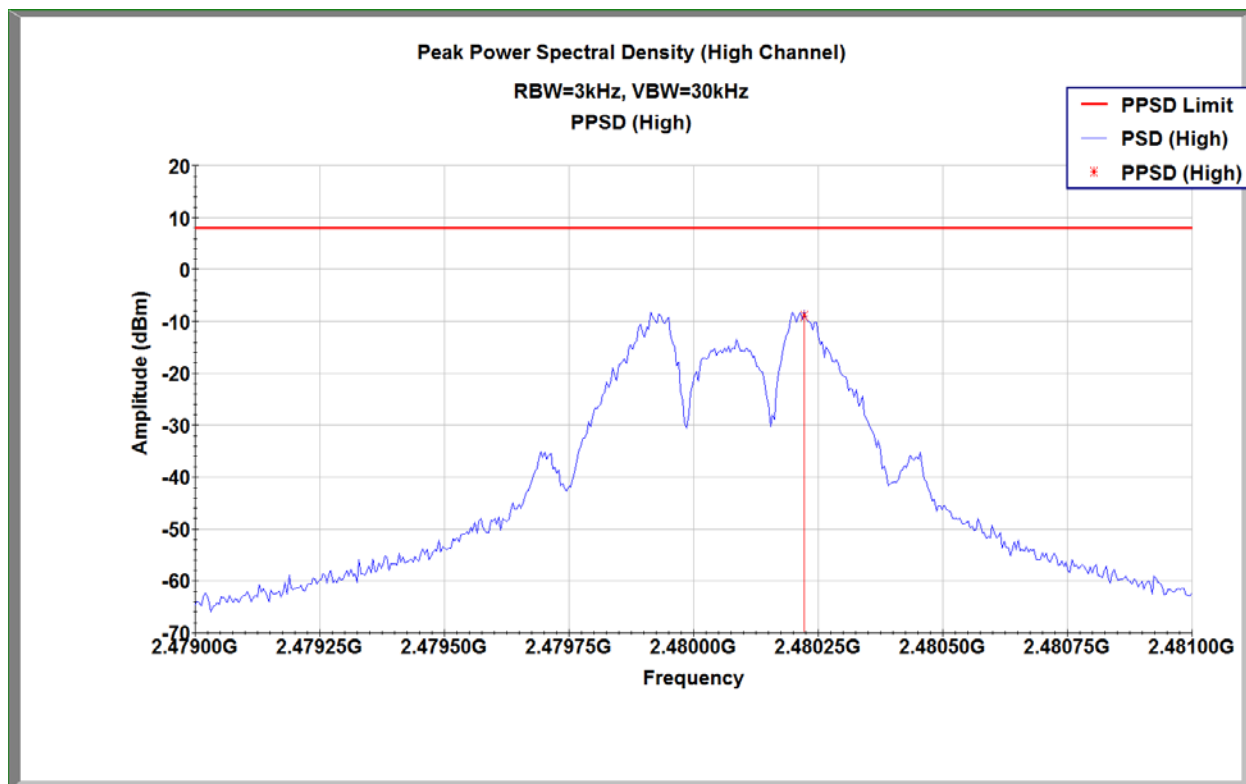


250kb/s Ch 39 (2480MHz) PPSP

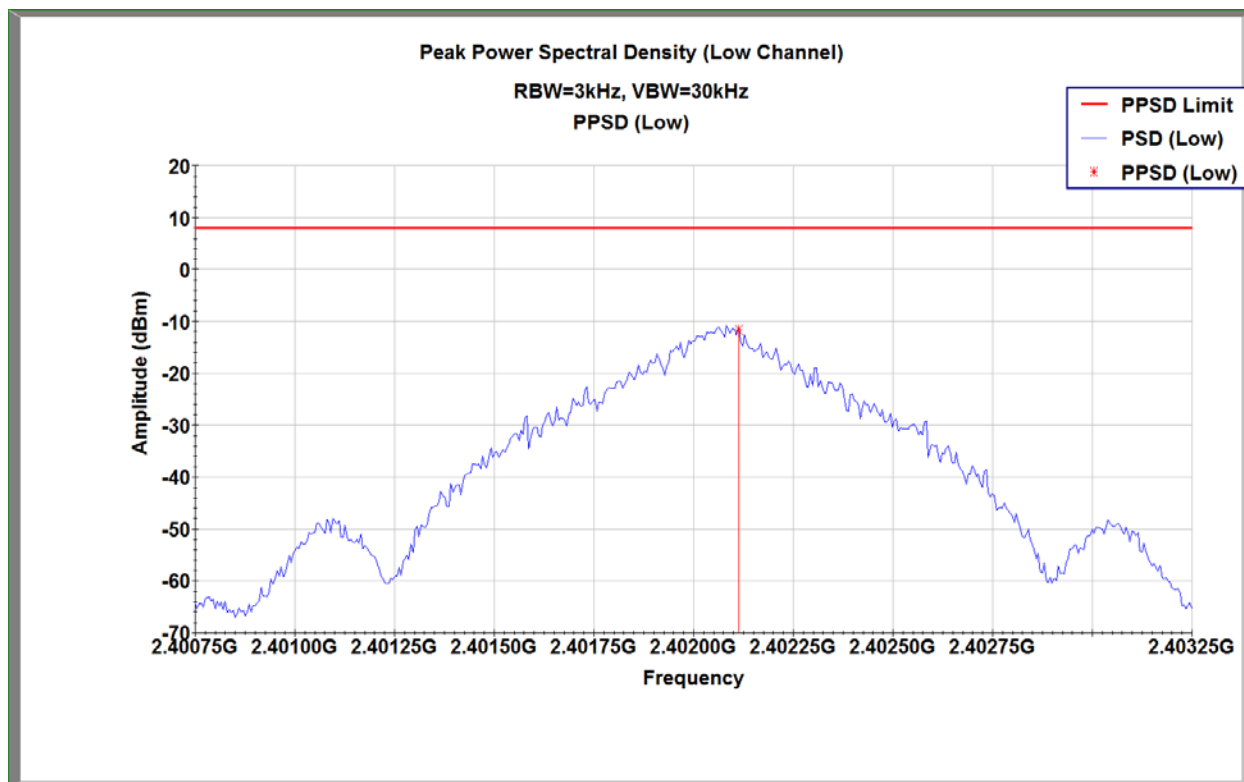

1Mb/s Ch 0 (2402MHz) PPSS

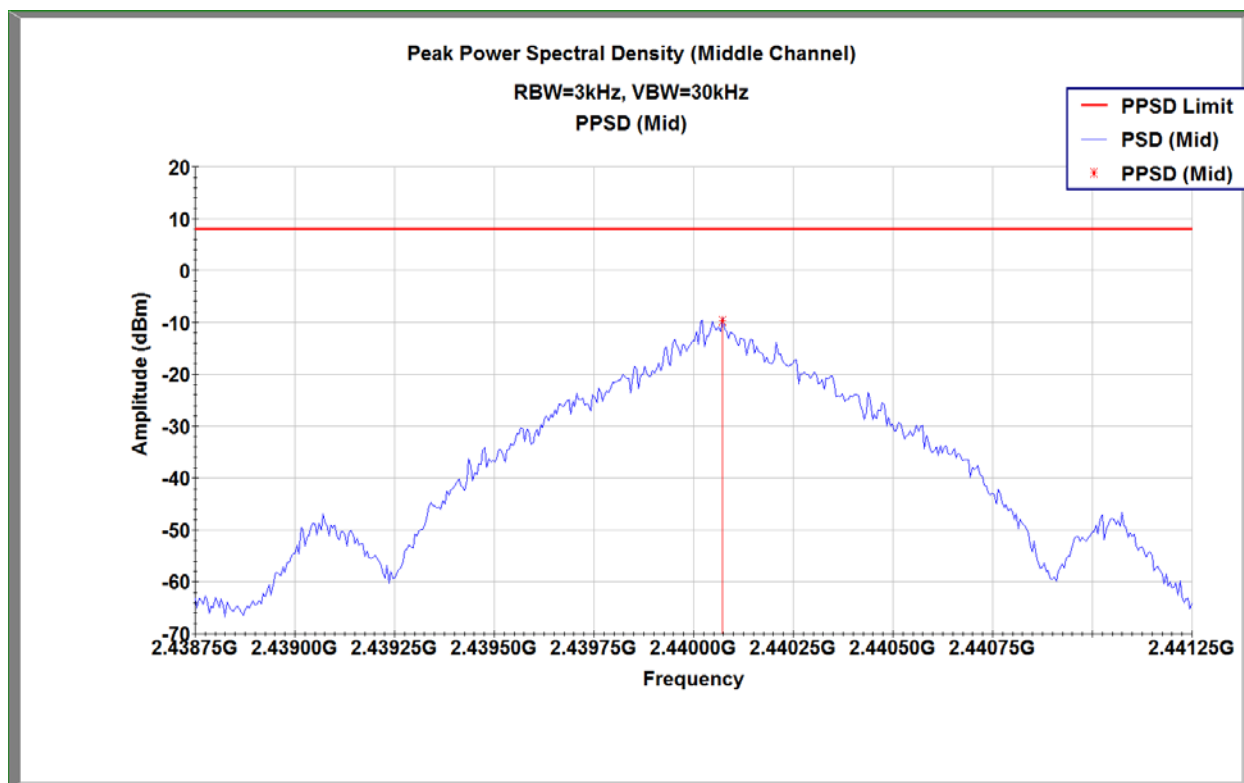


1Mb/s Ch 19 (2440MHz) PPSS

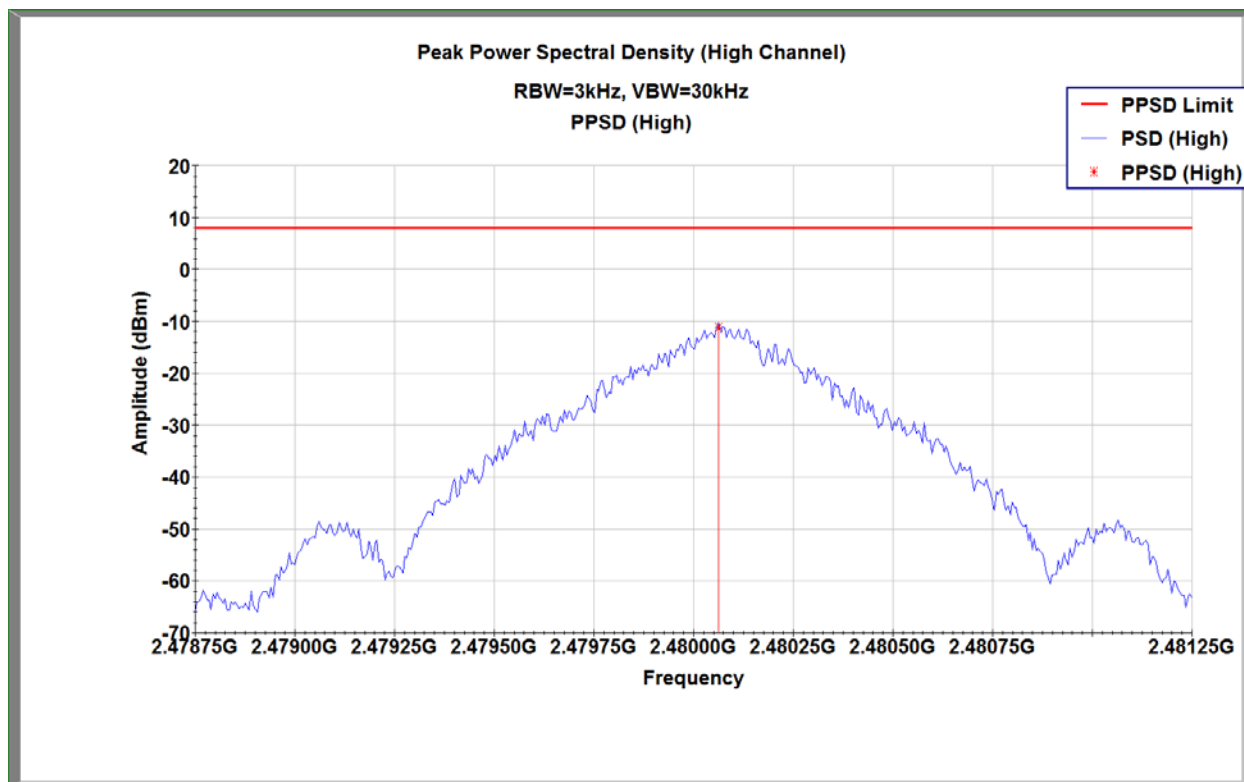


1Mb/s Ch 39 (2480MHz) PPSS




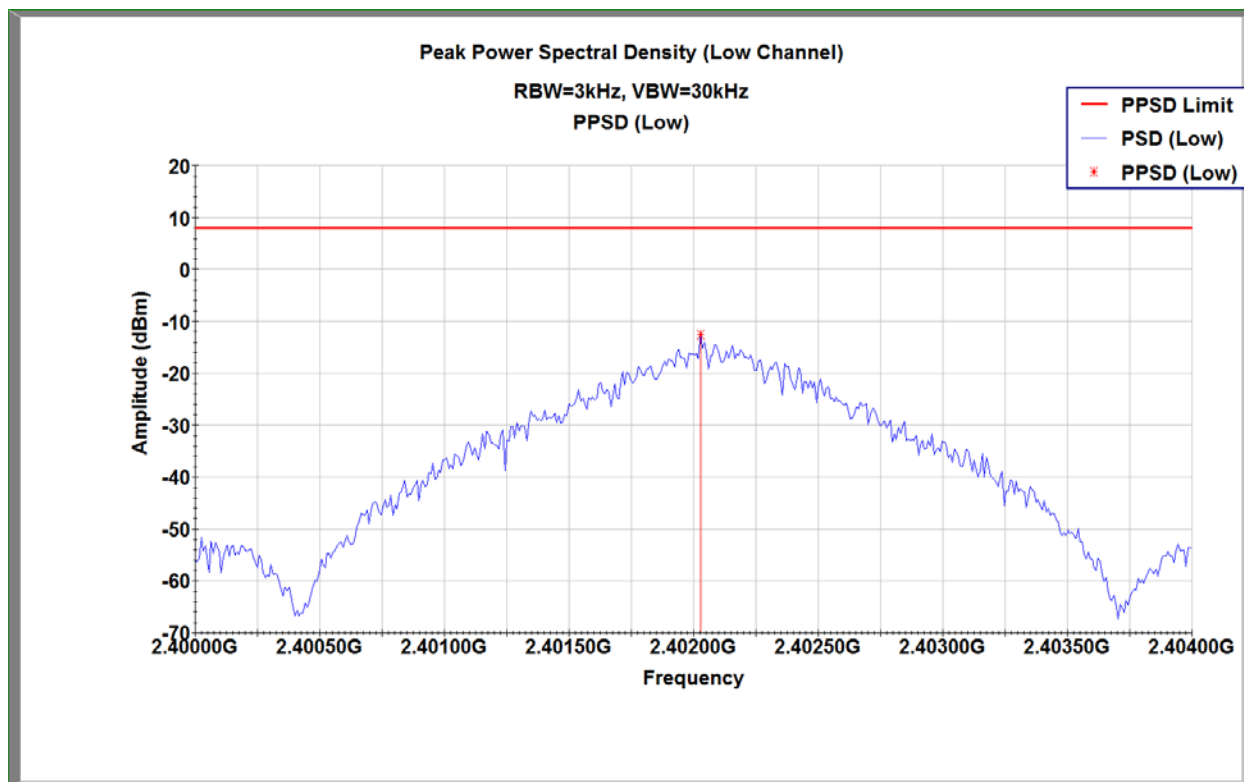

2Mb/s Ch 0 (2402MHz) PPSP

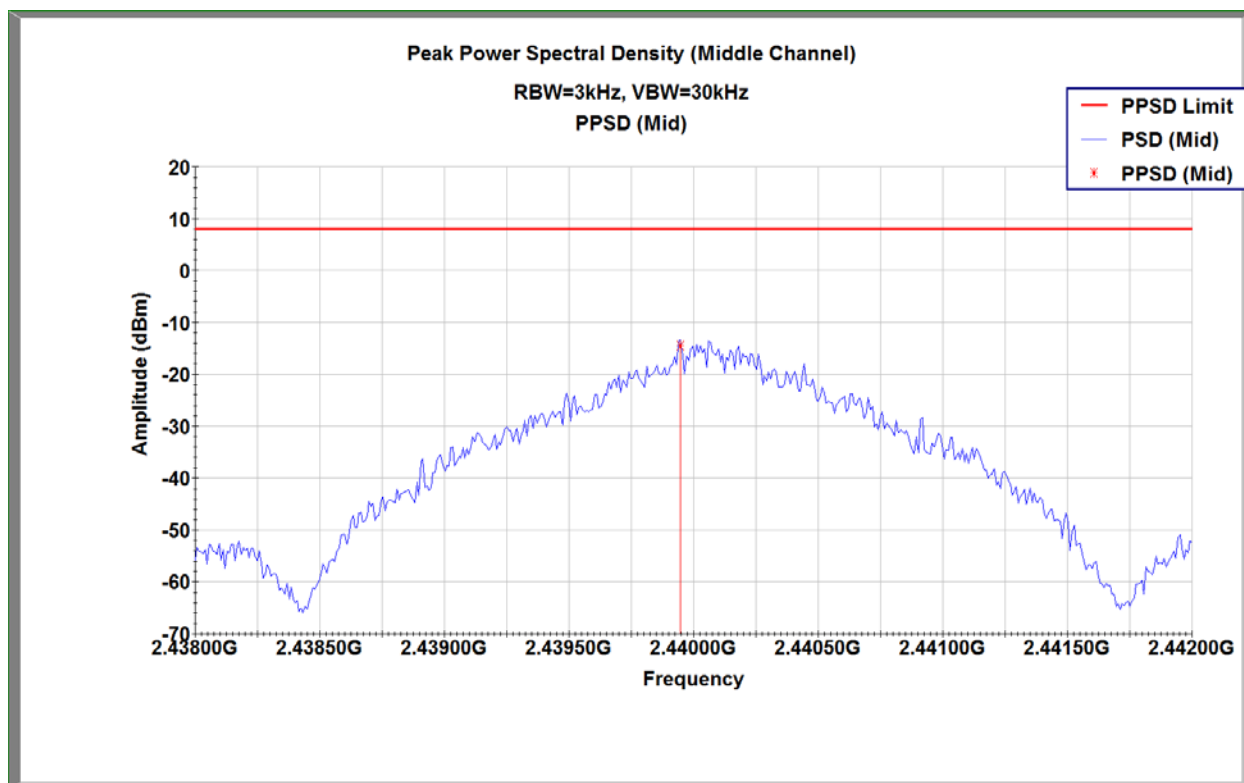

2Mb/s Ch 19 (2440MHz) PPSP

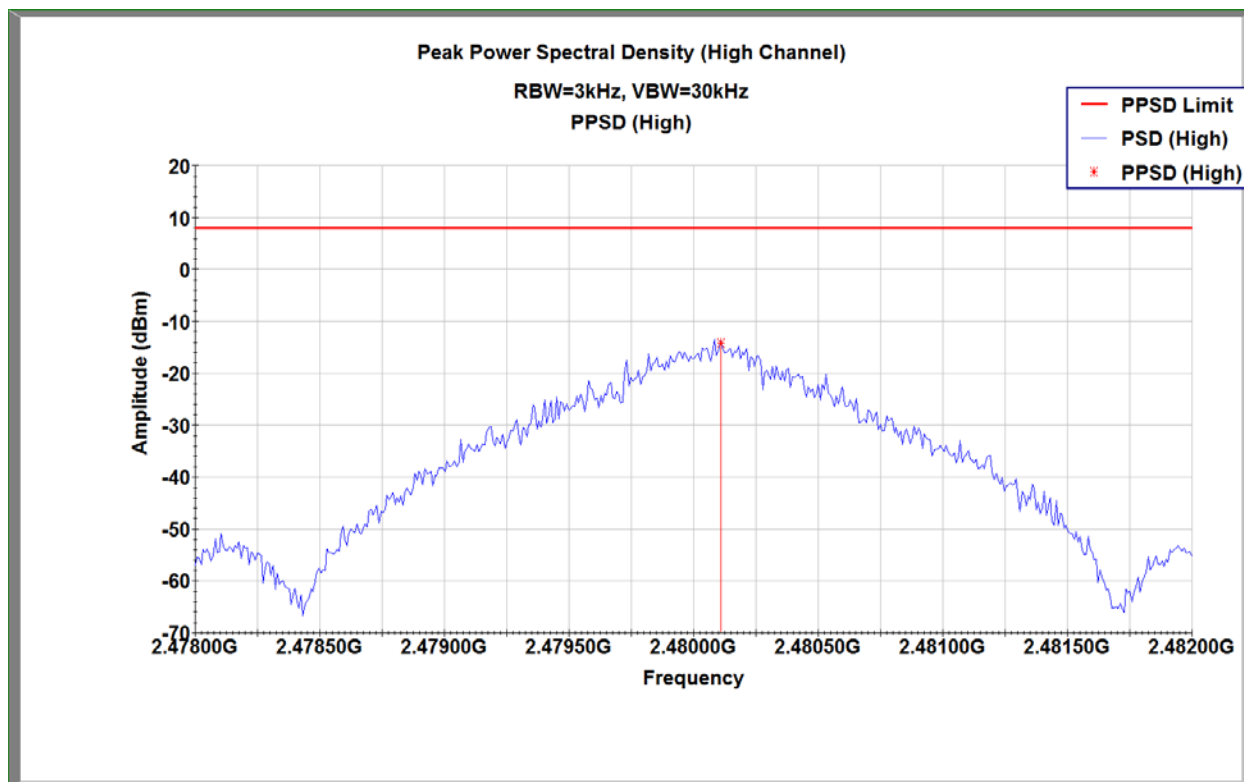

2Mb/s Ch 39 (2480MHz) PPSS



## 11 Conducted Spurious Emissions

### 11.1 Test Limits

#### FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### RSS-247 Issue 2 § 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 11.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.11 Emissions in nonrestricted frequency bands.

### 11.3 Test Equipment Used

| Description       | Asset | Manufacturer    | Model | Cal Date  | Cal Due   |
|-------------------|-------|-----------------|-------|-----------|-----------|
| EMI Test Receiver | 2327  | Rohde & Schwarz | ESi26 | 9/20/2017 | 9/20/2018 |

### 11.4 Test Results


The device was found to be **compliant**. All spurious emissions were found to be attenuated more than 30dB below the level of the fundamental.

### 11.5 Test Conditions


|                                  |                 |                       |           |
|----------------------------------|-----------------|-----------------------|-----------|
| Test Personnel:                  | B. Lackey       | Test Date:            | 8/29/2018 |
| Supervising/Reviewing Engineer:  |                 | Limit Applied:        | See Above |
| (Where Applicable)               | NA              | Ambient Temperature:  | 25.6C     |
| Product Standard:                | FCC Part 15.247 | Relative Humidity:    | 52.2%     |
| Input Voltage:                   | RSS-247 Issue 2 | Atmospheric Pressure: | 985.4mbar |
| Pretest Verification w / Ambient | Battery         |                       |           |
| Signals or BB Source:            | Yes             |                       |           |




## 11.6 Test Data

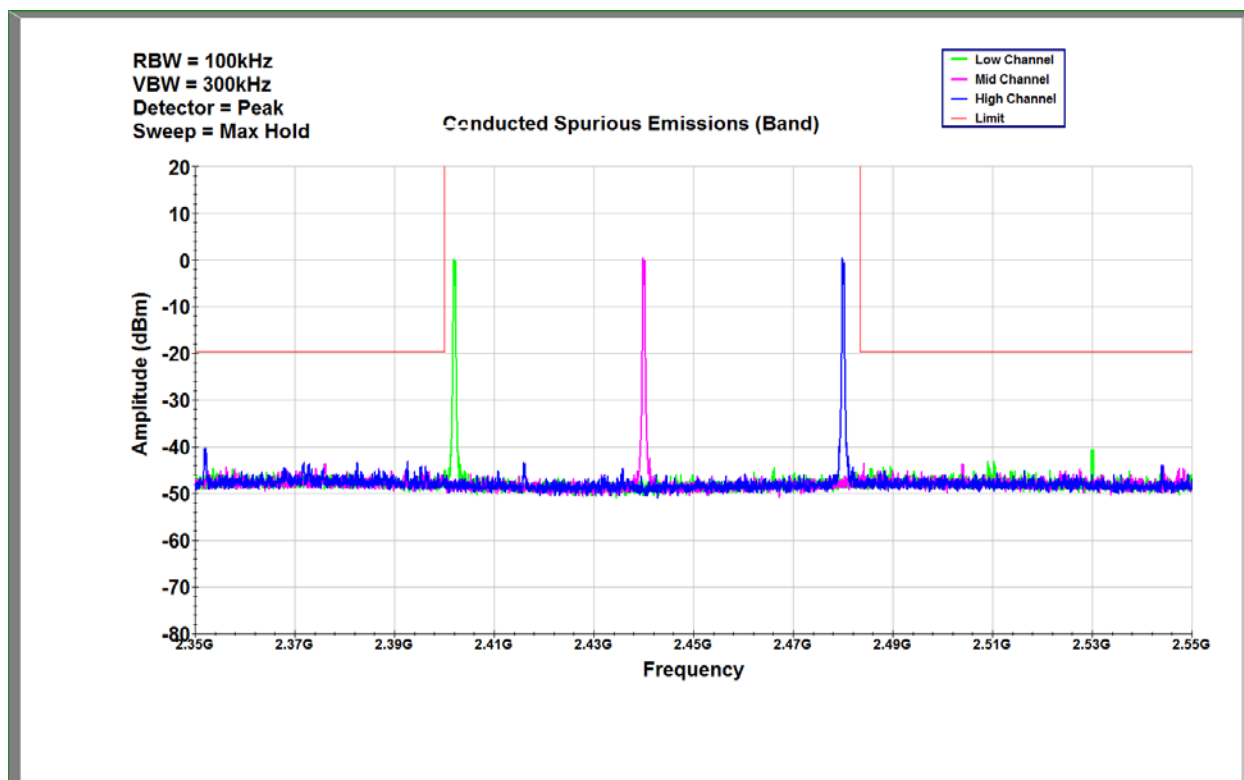


250kb/s Conducted Spurious Emissions (Band)

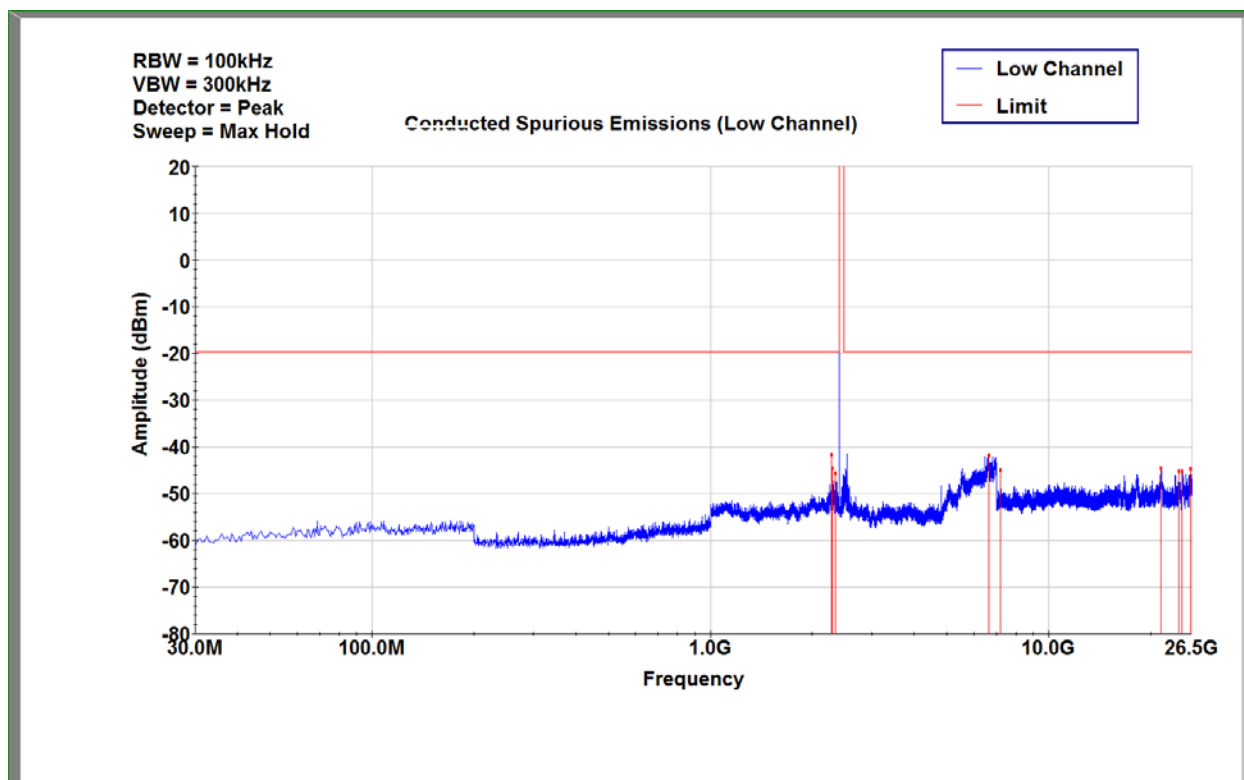


250kb/s Ch 0 (2402MHz) Conducted Spurious Emissions

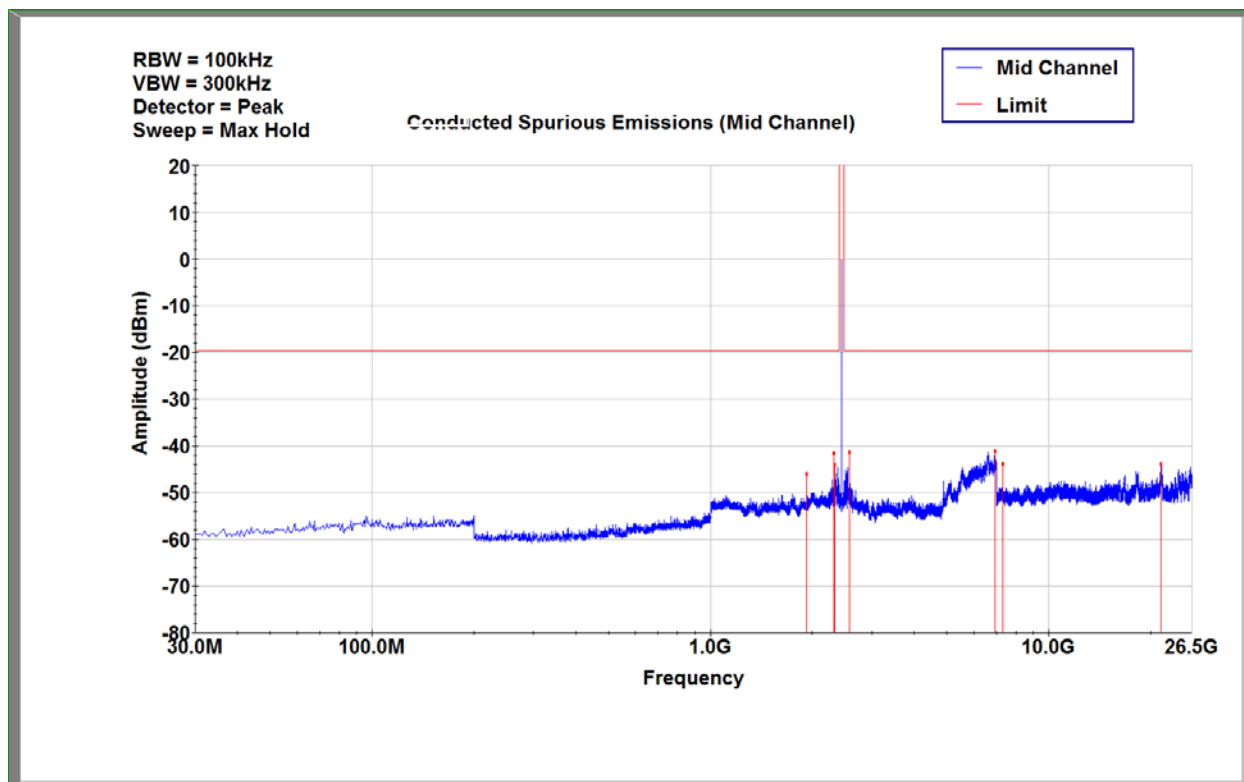


250kb/s Ch 19 (2440MHz) Conducted Spurious Emissions

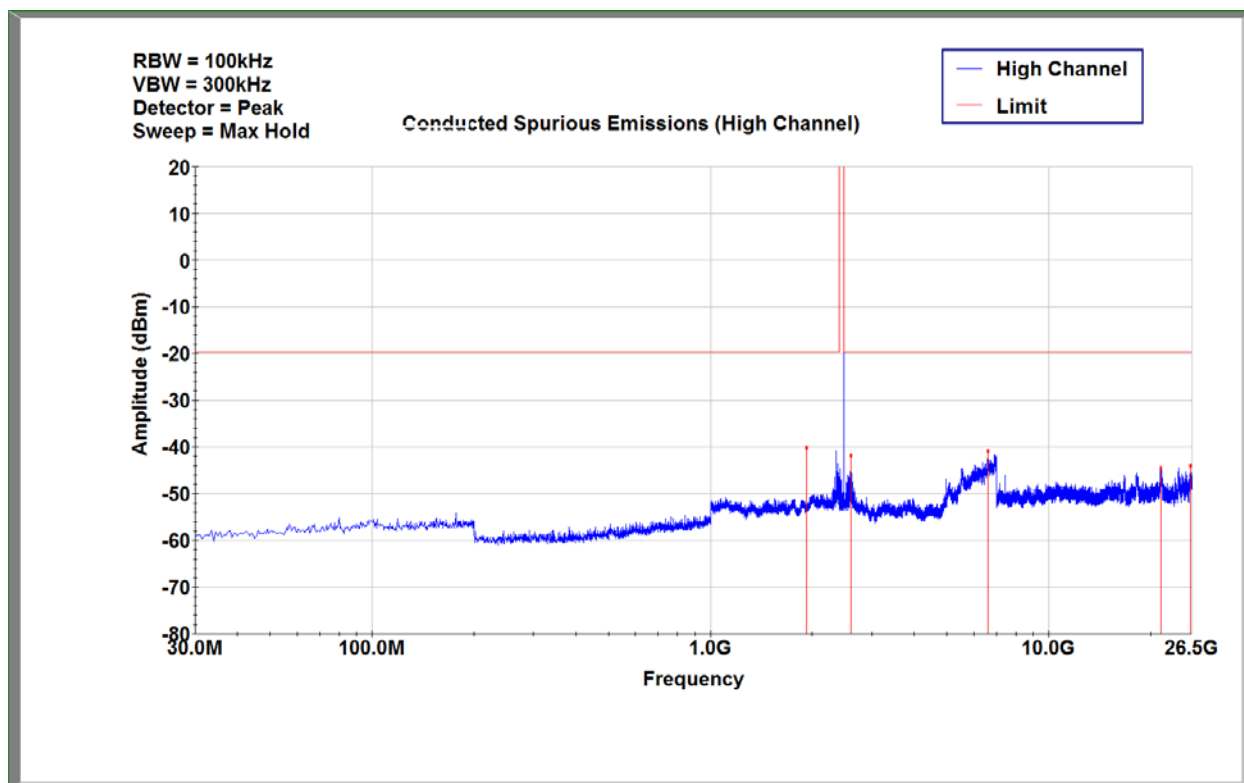


250kb/s Ch 39 (2480MHz) Conducted Spurious Emissions

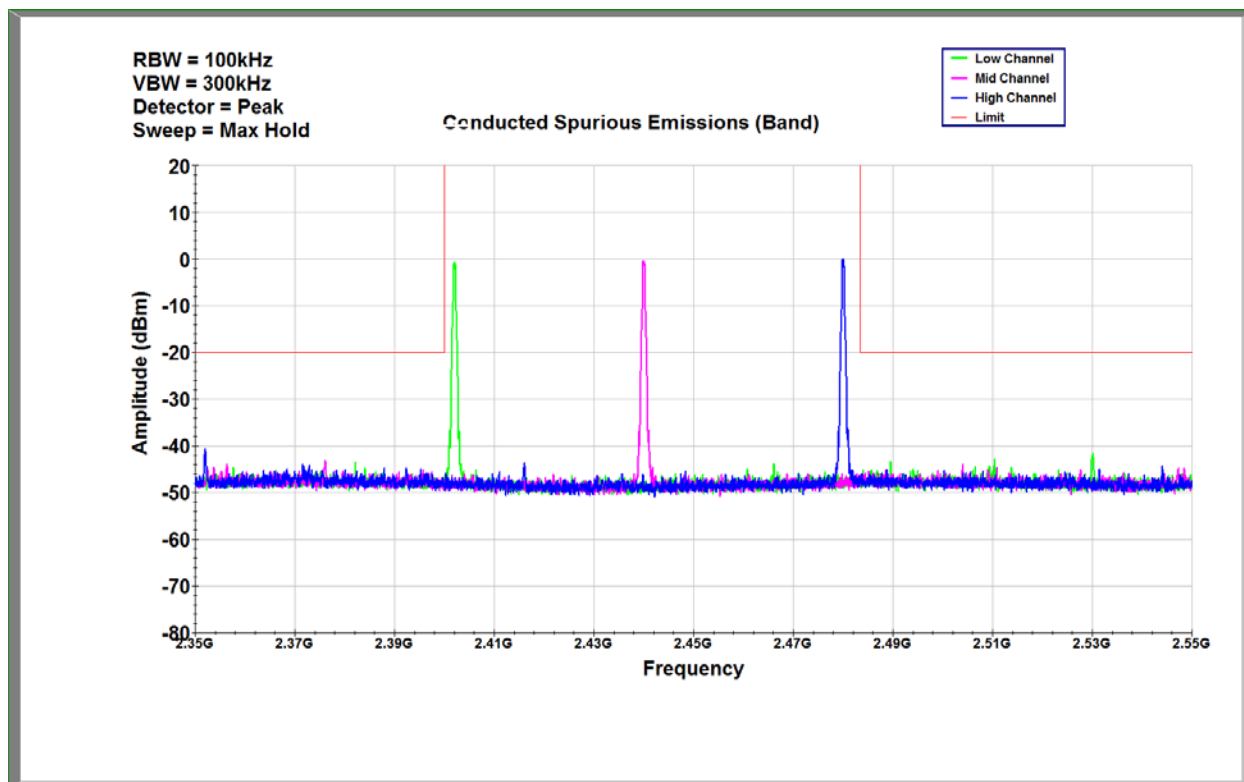


1Mb/s Conducted Spurious Emissions (Band)

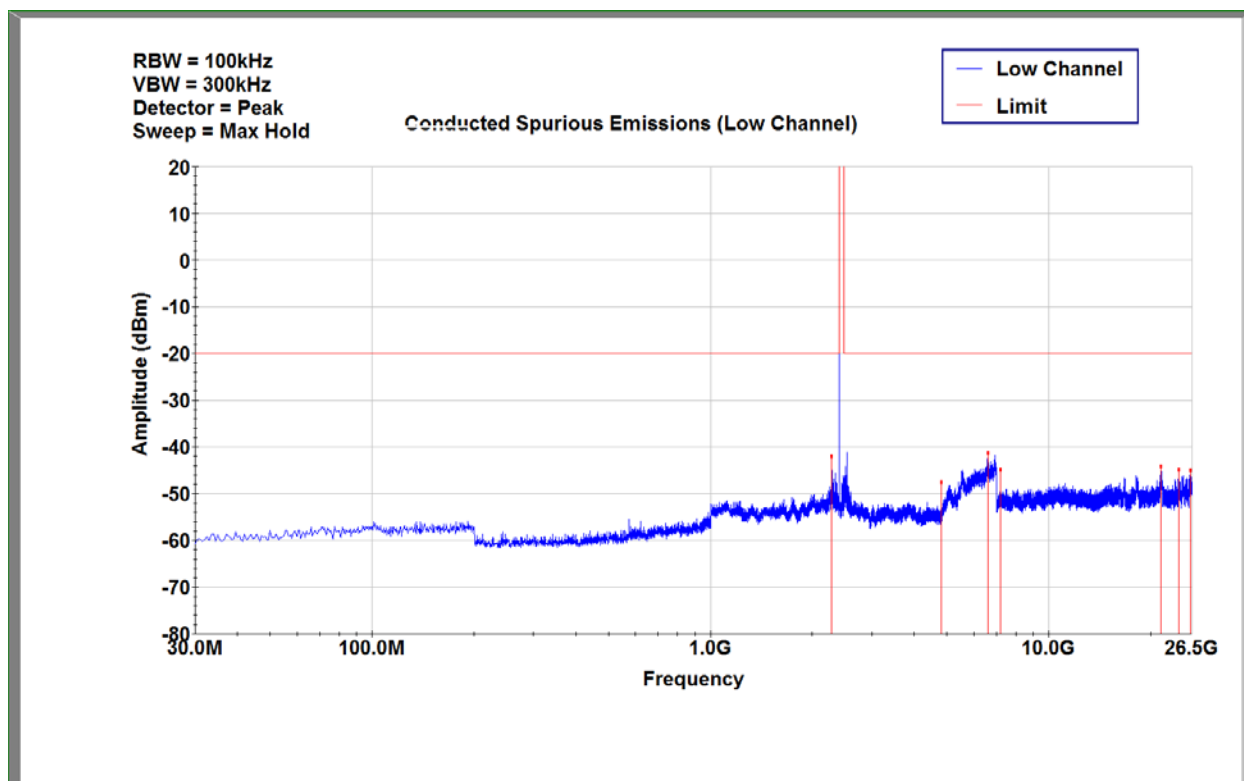


1Mb/s Ch 0 (2402MHz) Conducted Spurious Emissions

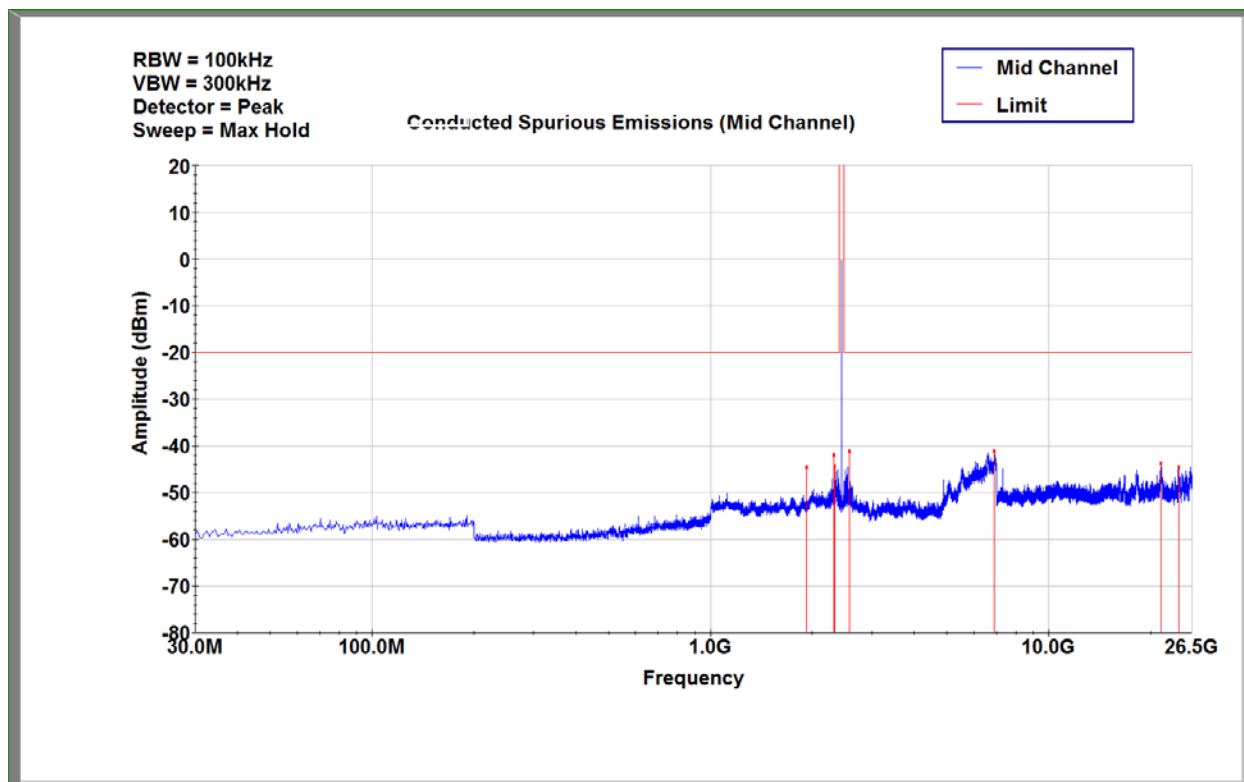


1Mb/s Ch 19 (2440MHz) Conducted Spurious Emissions

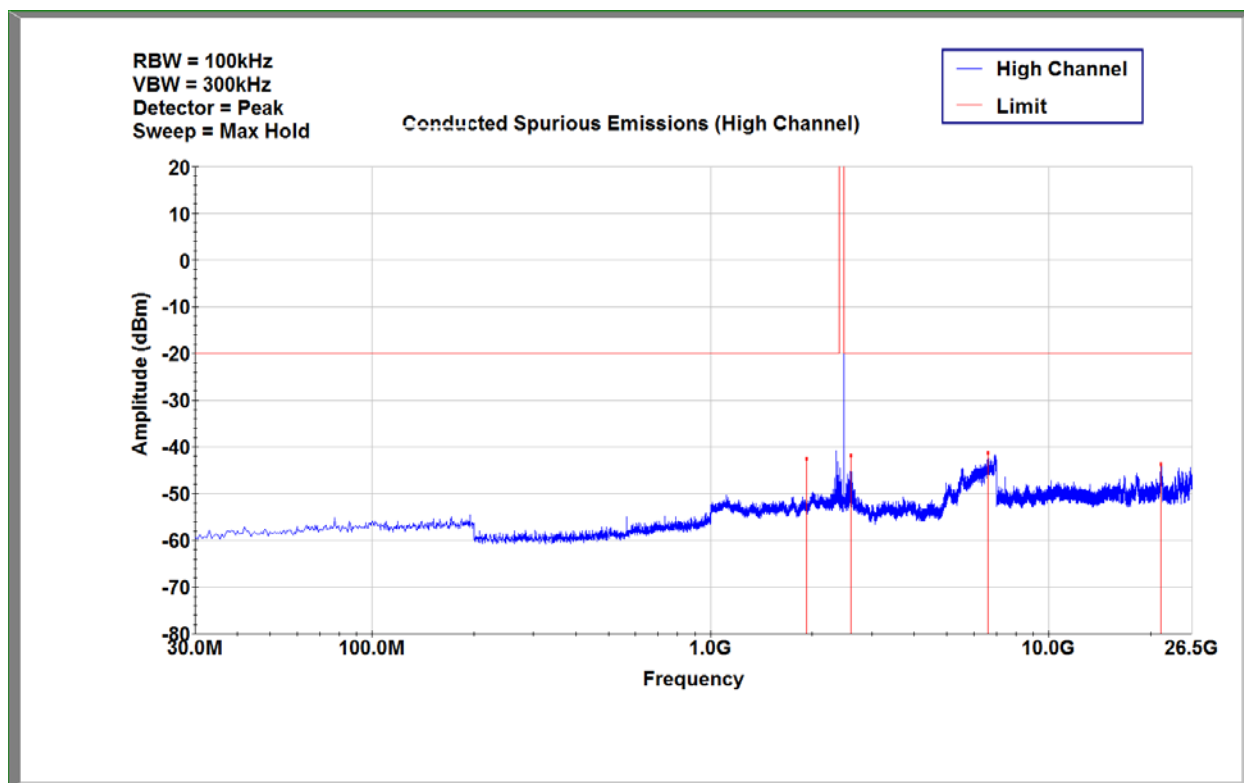

1Mb/s Ch 39 (2480MHz) Conducted Spurious Emissions

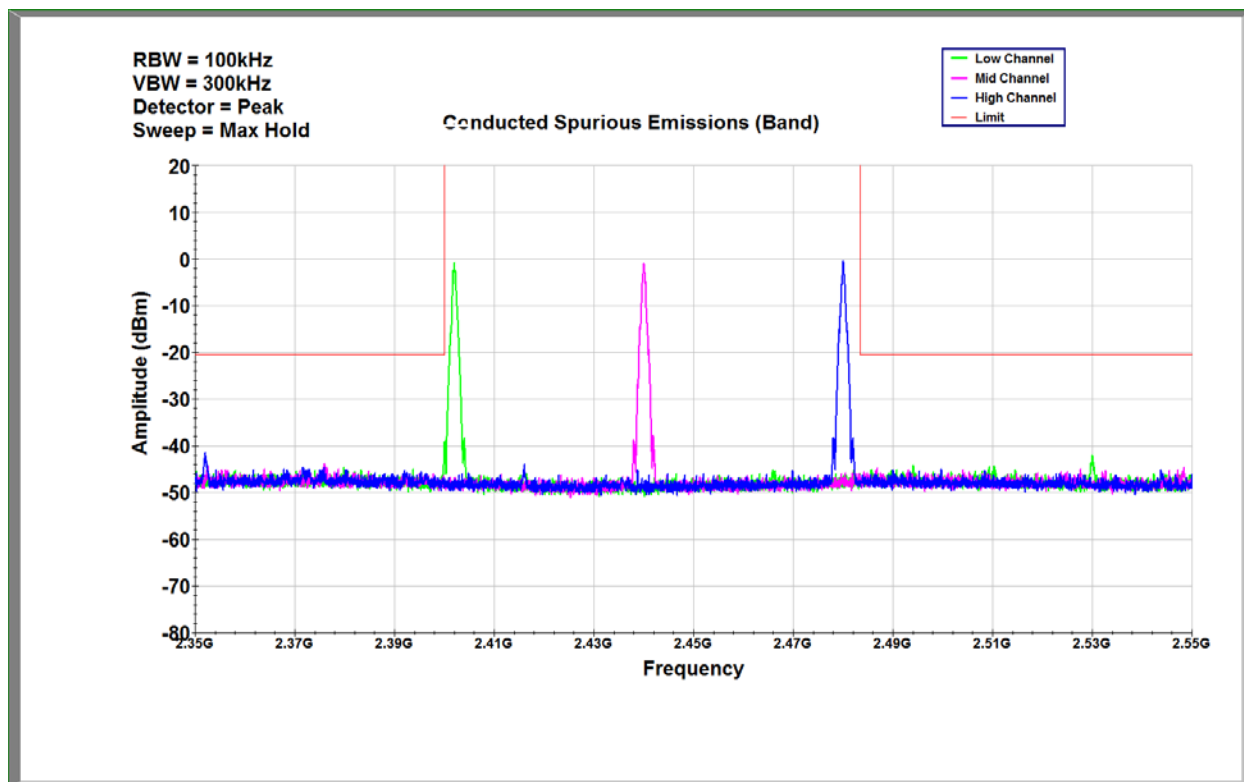


2Mb/s Conducted Spurious Emissions (Band)

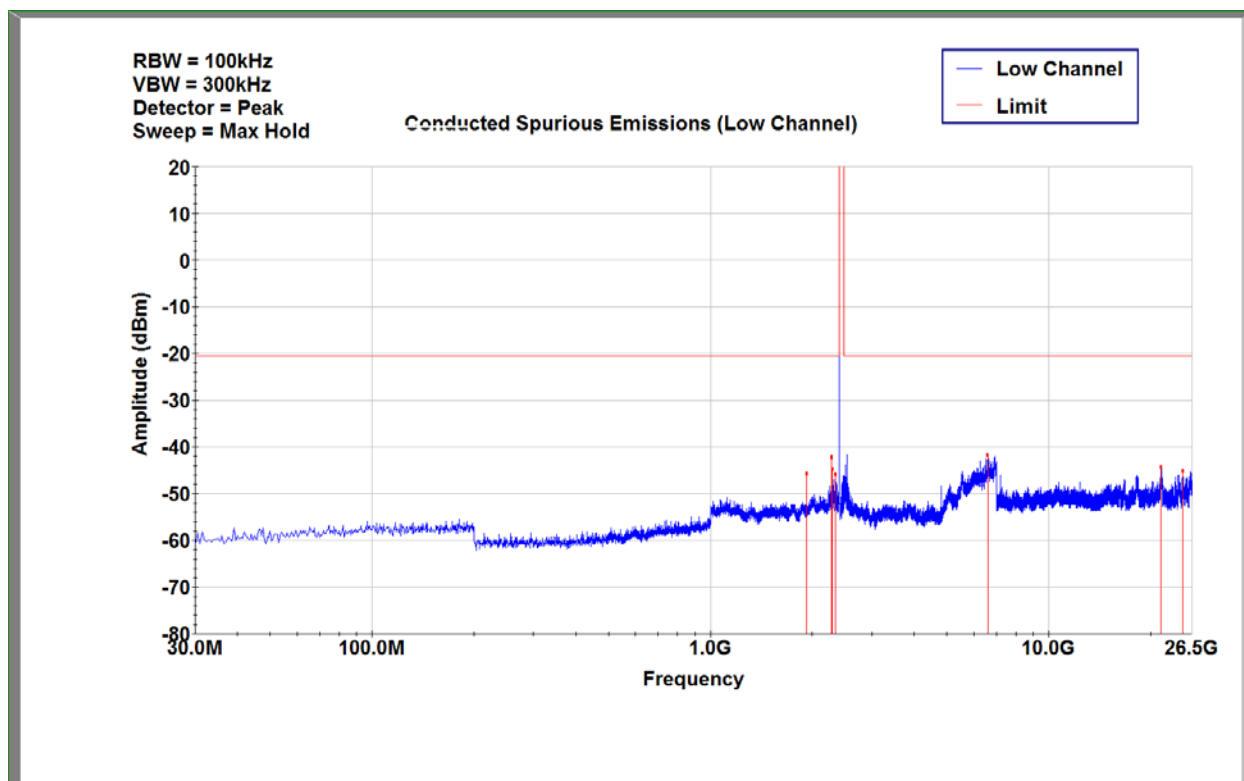


2Mb/s Ch 0 (2402MHz) Conducted Spurious Emissions



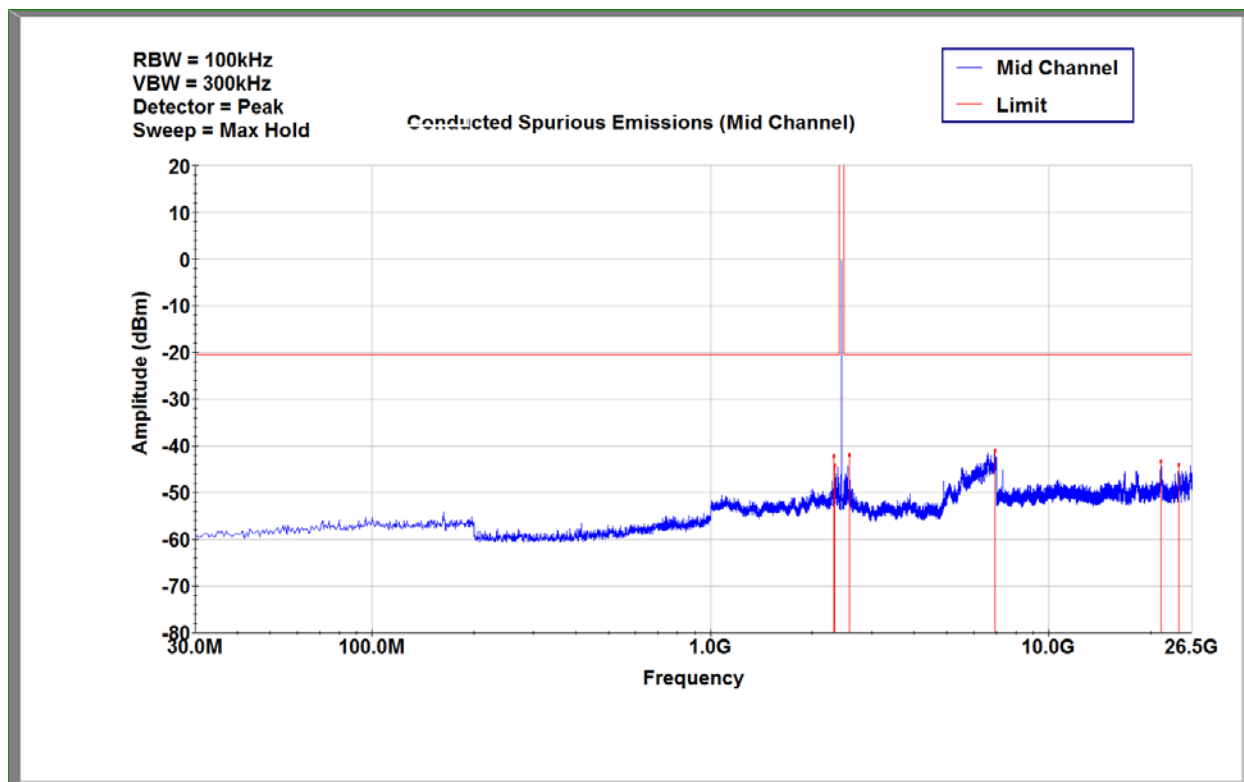

2Mb/s Ch 19 (2440MHz) Conducted Spurious Emissions

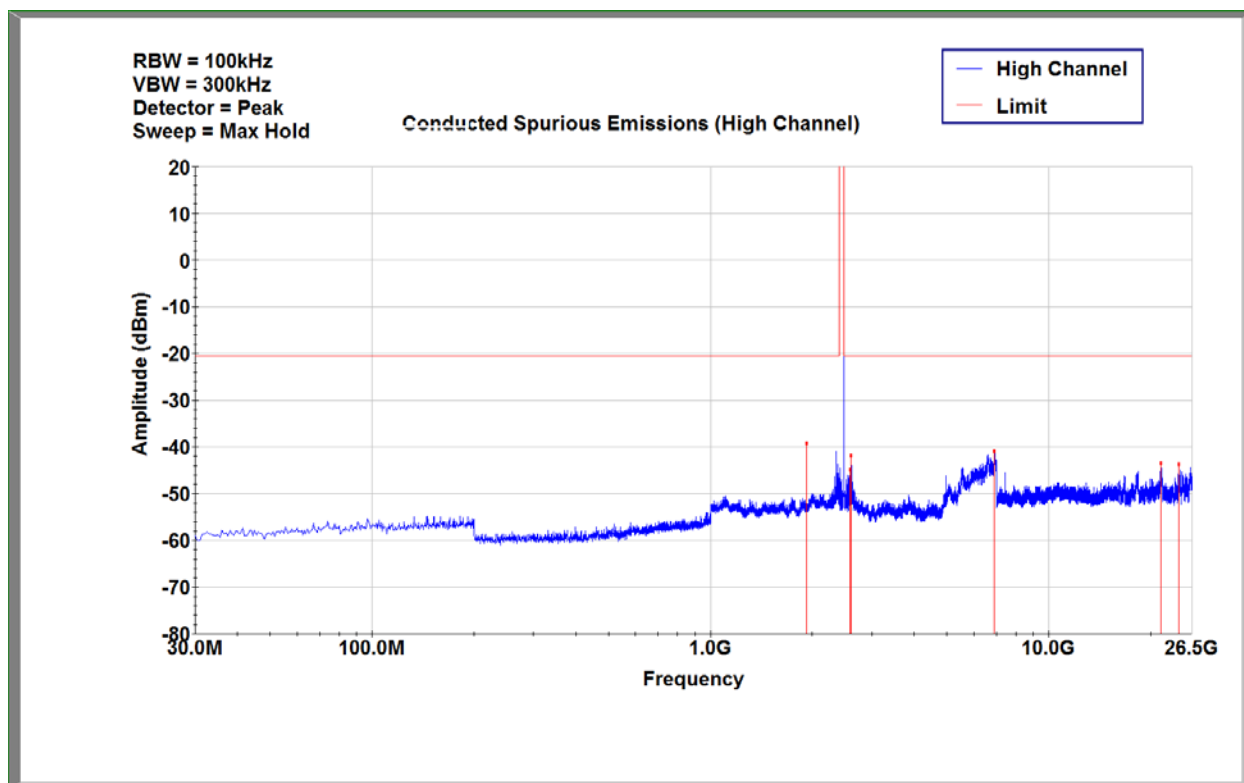

2Mb/s Ch 39 (2480MHz) Conducted Spurious Emissions



## 12 Antenna Requirement

### 12.1 Test Limits

#### FCC Part 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### RSS-Gen Issue 5 § 6.8:

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

*This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.*

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

### 12.2 Test Results

The device was found to be **compliant**. The device has an internal, permanently affixed antenna.

**13 Revision History**

| Revision Level | Date      | Report Number      | Prepared By | Reviewed By | Notes                             |
|----------------|-----------|--------------------|-------------|-------------|-----------------------------------|
| 0              | 9/4/2018  | 103621914LEX-002   | BZ          | BCT         | Original Issue                    |
| 1              | 9/25/2018 | 103621914LEX-002.1 | BZ          | BCT         | Updated per TCB reviewer feedback |
|                |           |                    |             |             |                                   |
|                |           |                    |             |             |                                   |
|                |           |                    |             |             |                                   |
|                |           |                    |             |             |                                   |