


TR no.: 21025154-22149-0

2022-04-01


Plot no. 45: radiated emissions 60.75 GHz, hor./vert. polarization, 3 GHz mode, BMT




Plot no. 46: radiated emissions 60.75 GHz, hor./vert. polarization, 3 GHz normal operation mode

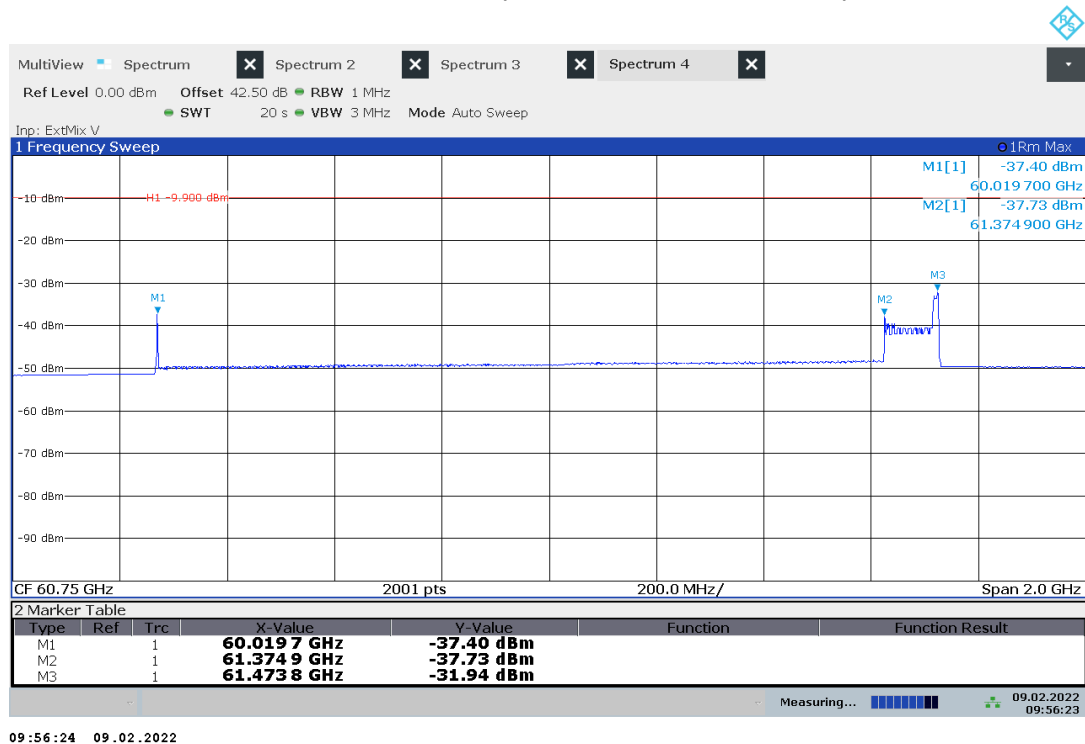

Plot no. 47: radiated emissions 75 GHz – 110 GHz, hor./vert. polarization, 3 GHz mode, BMT

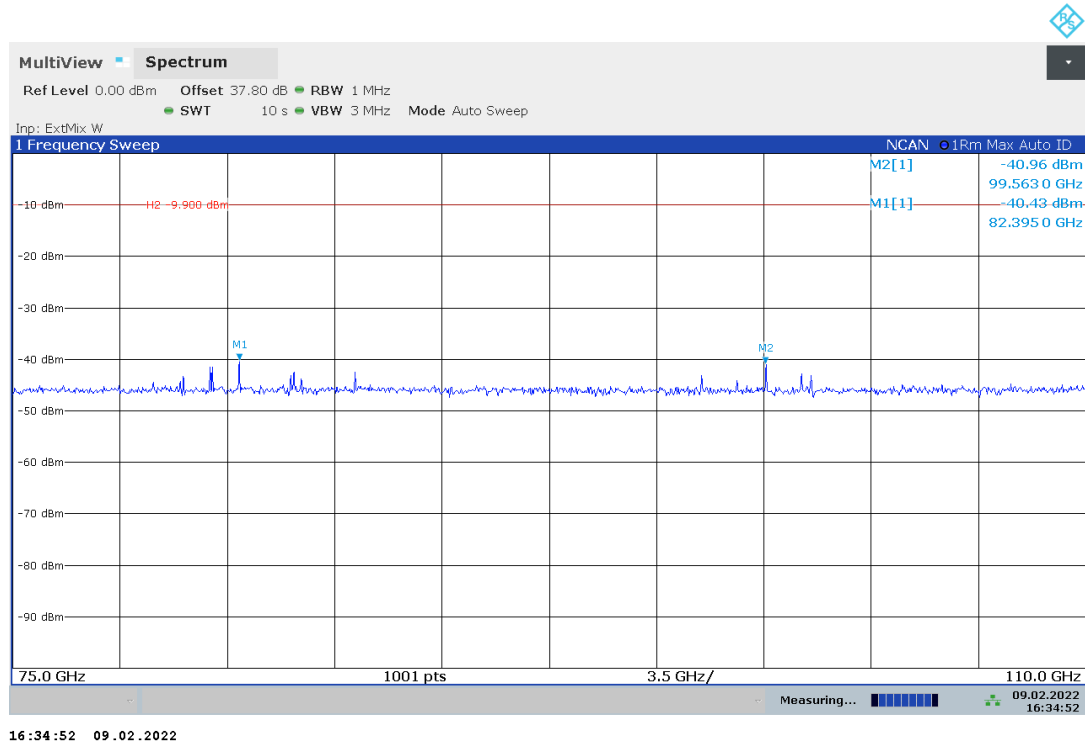


Plot no. 48: radiated emissions 110 GHz – 120 GHz, hor./vert. polarization, 3 GHz mode, BMT

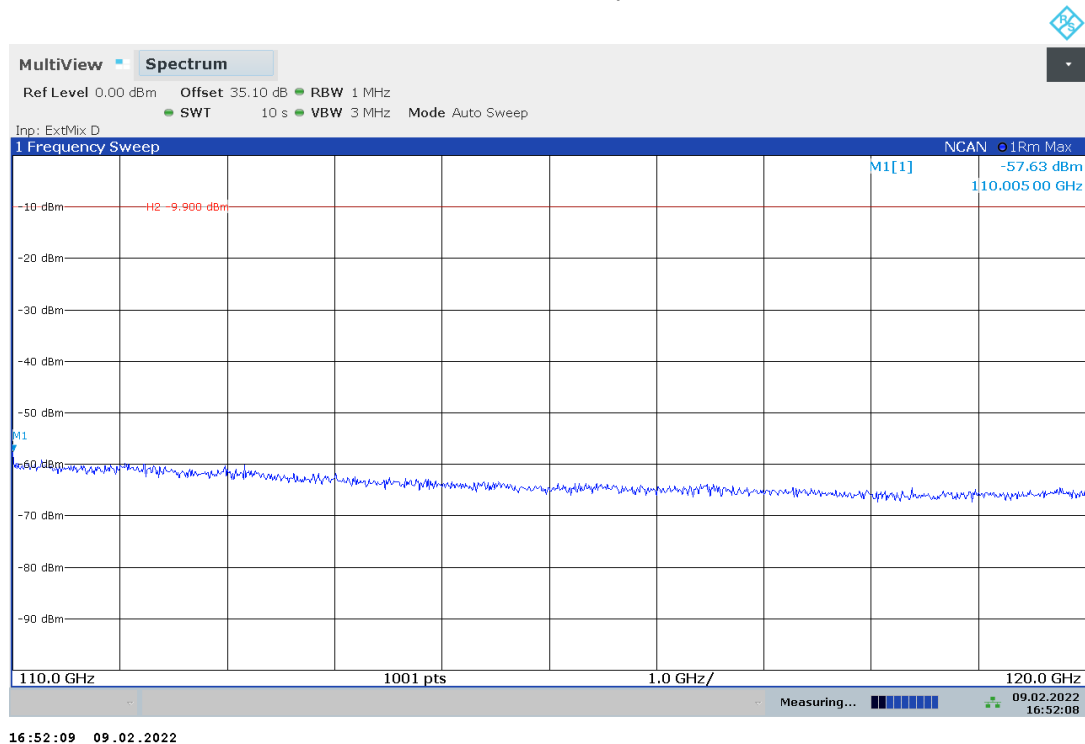


TR no.: **21025154-22149-0**

**2022-04-01**

Plot no. 49: radiated emissions 123 GHz – 140 GHz, hor./vert. polarization, 3 GHz mode, BMT

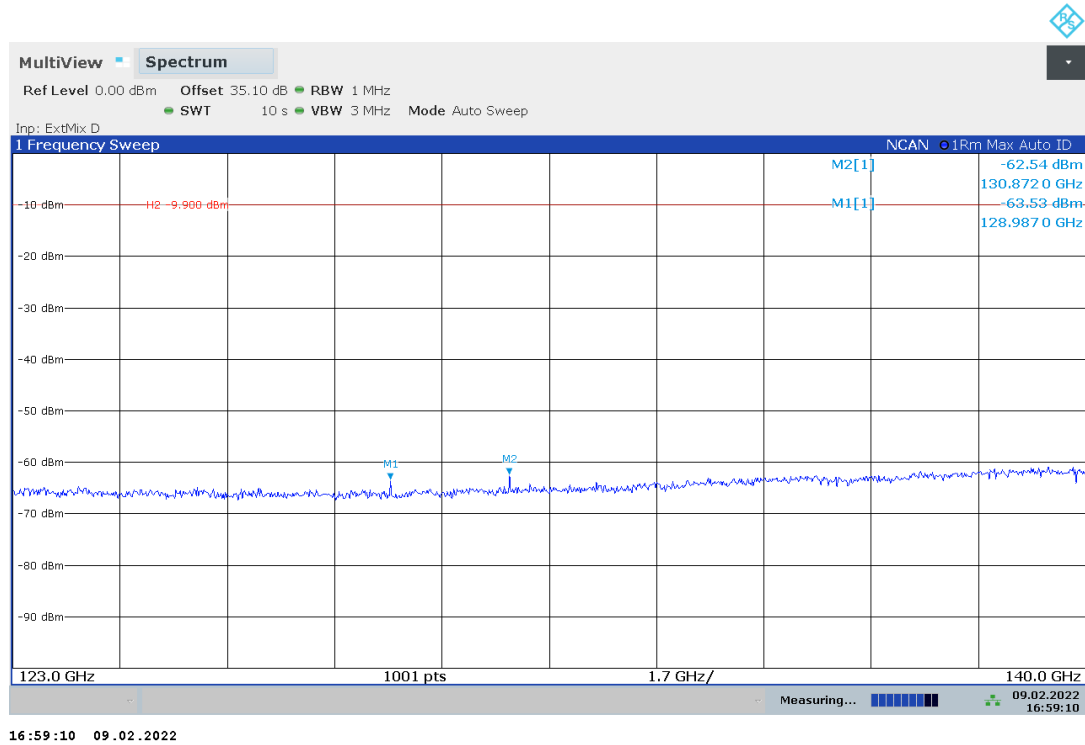


Plot no. 50: radiated emissions 140 GHz – 220 GHz, hor./vert. polarization, 3 GHz mode, BMT

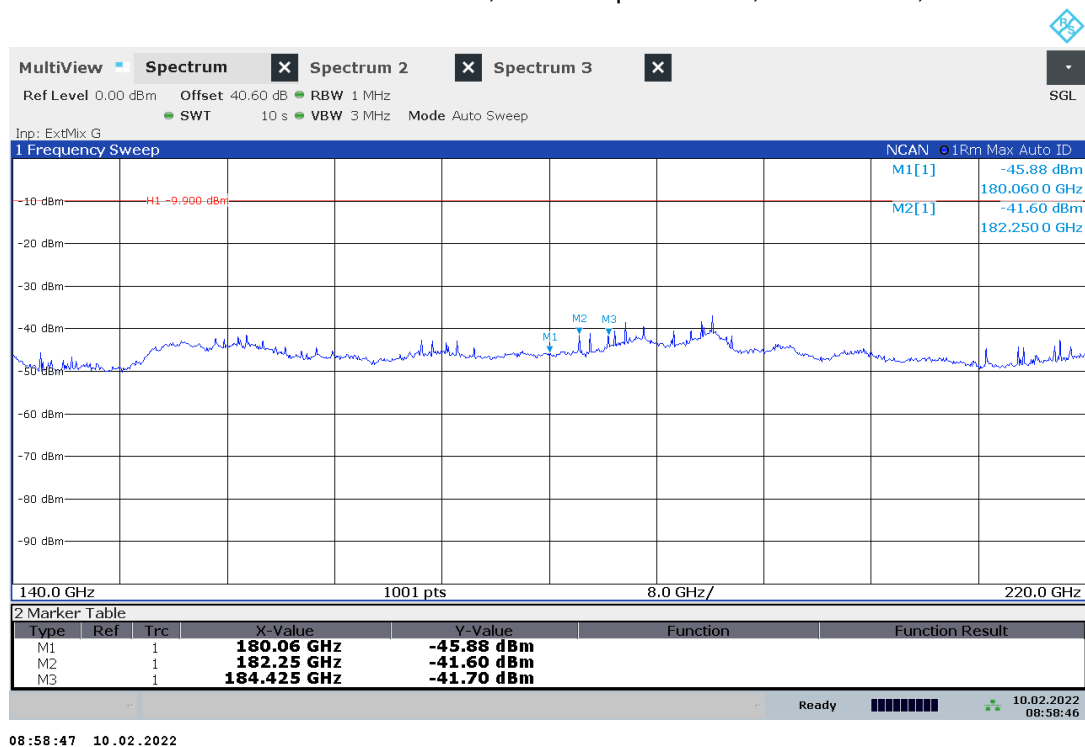


TR no.: **21025154-22149-0**

**2022-04-01**

Plot no. 51: radiated emissions 220 GHz – 325 GHz, hor./vert. polarization, 3 GHz mode, BMT

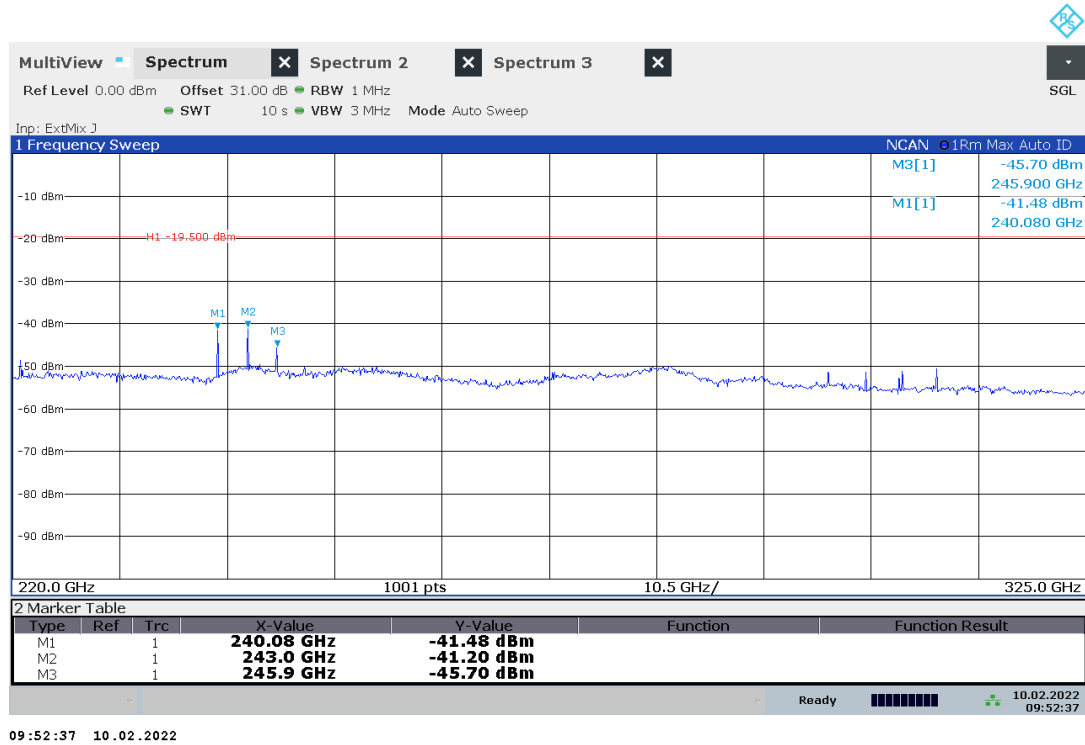

Plot no. 52: radiated emissions 325 GHz – 375 GHz, hor./vert. polarization, 3 GHz mode, BMT

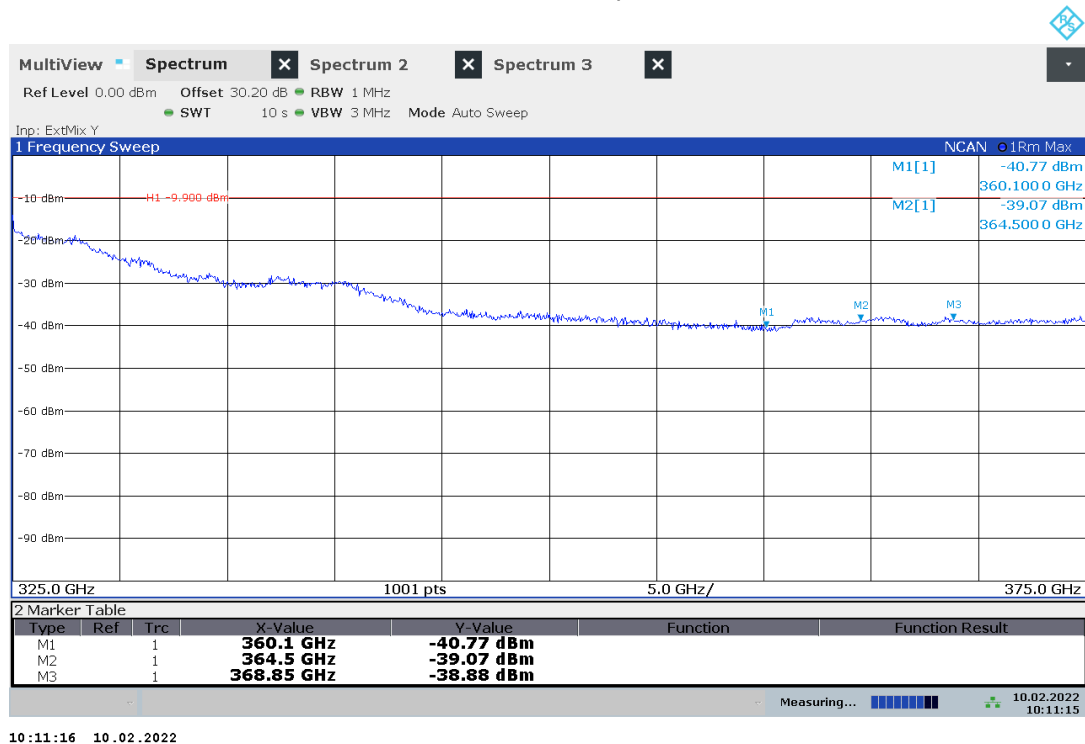


TR no.: **21025154-22149-0**

**2022-04-01**


Plot no. 53: radiated emissions 18 GHz – 26.5 GHz, hor./vert. polarization, 1 GHz mode, BMT



Plot no. 54: radiated emissions 26.5 GHz – 40 GHz, hor./vert. polarization, 1 GHz mode, BMT

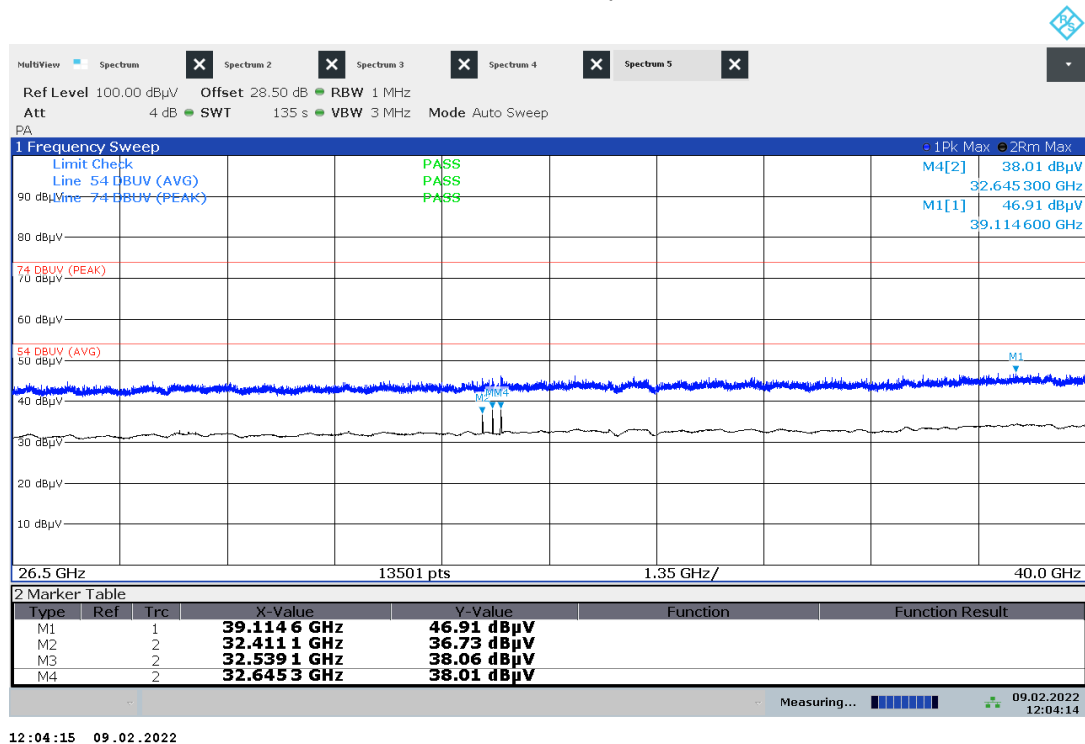

Plot no. 55: radiated emissions 40 GHz – 50 GHz, hor./vert. polarization, 1 GHz mode, BMT

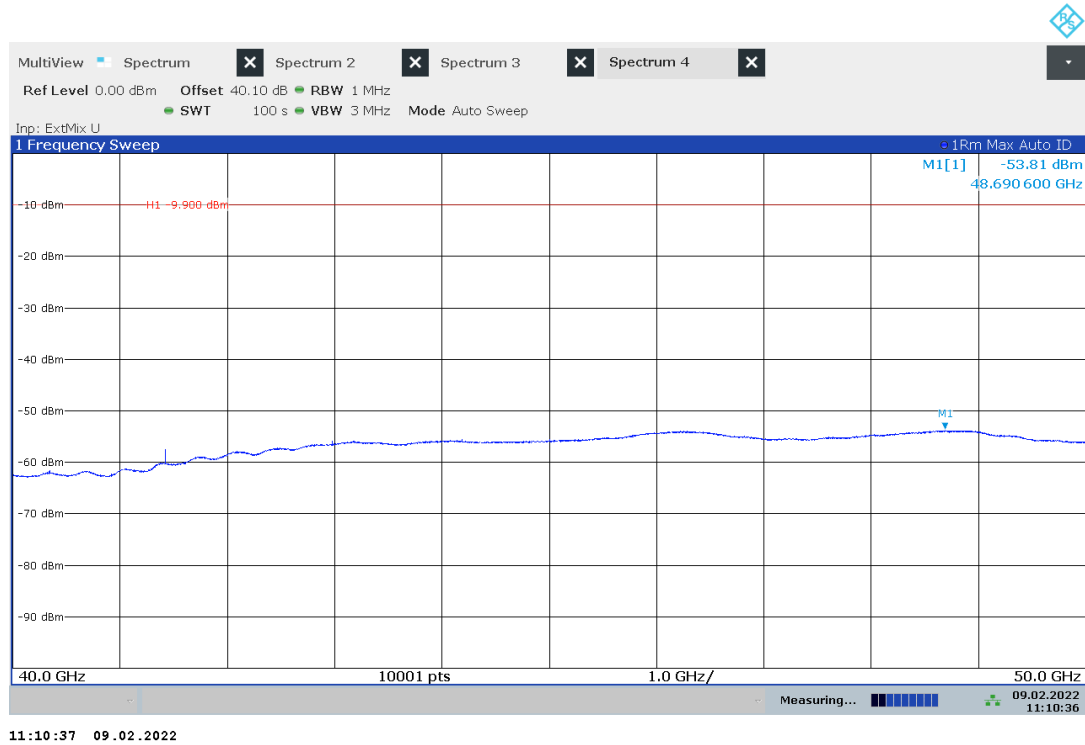


Plot no. 56: radiated emissions 50 GHz – 75 GHz, hor./vert. polarization, 1 GHz mode, BMT



TR no.: 21025154-22149-0

2022-04-01


Plot no. 57: radiated emissions 60.75 GHz, hor./vert. polarization, 1 GHz mode, BMT

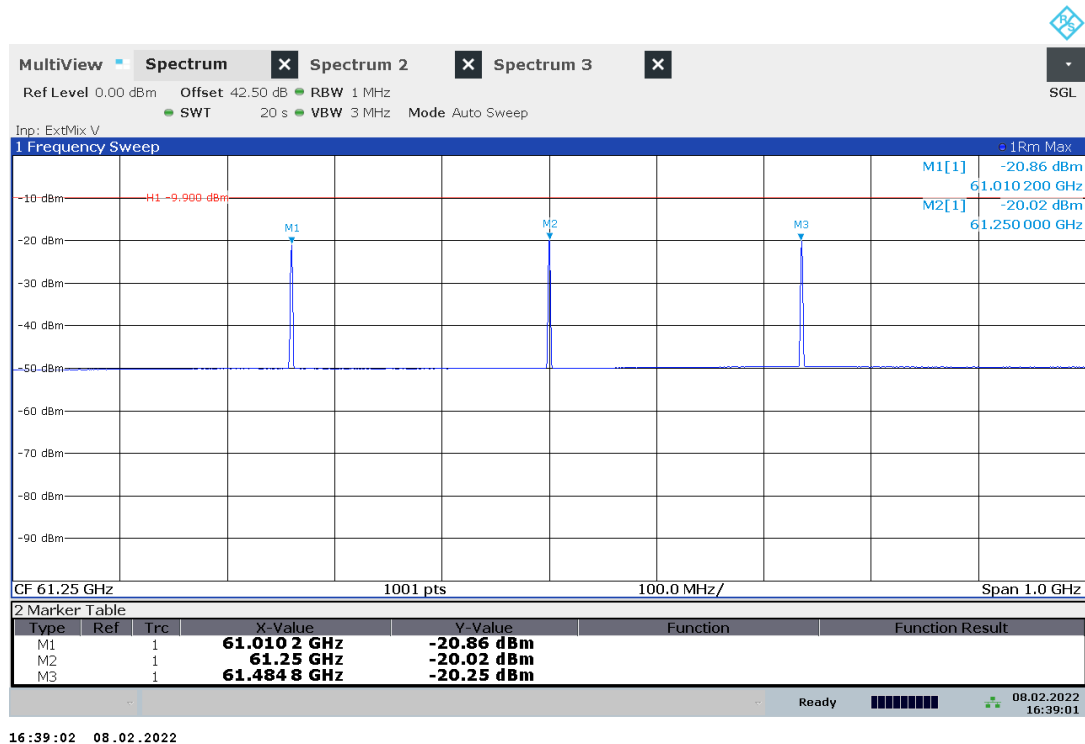


Plot no. 58: radiated emissions 61.25 GHz, hor./vert. polarization, 1 GHz normal operation mode



Plot no. 59: radiated emissions 75 GHz – 110 GHz, hor./vert. polarization, 1 GHz mode, BMT

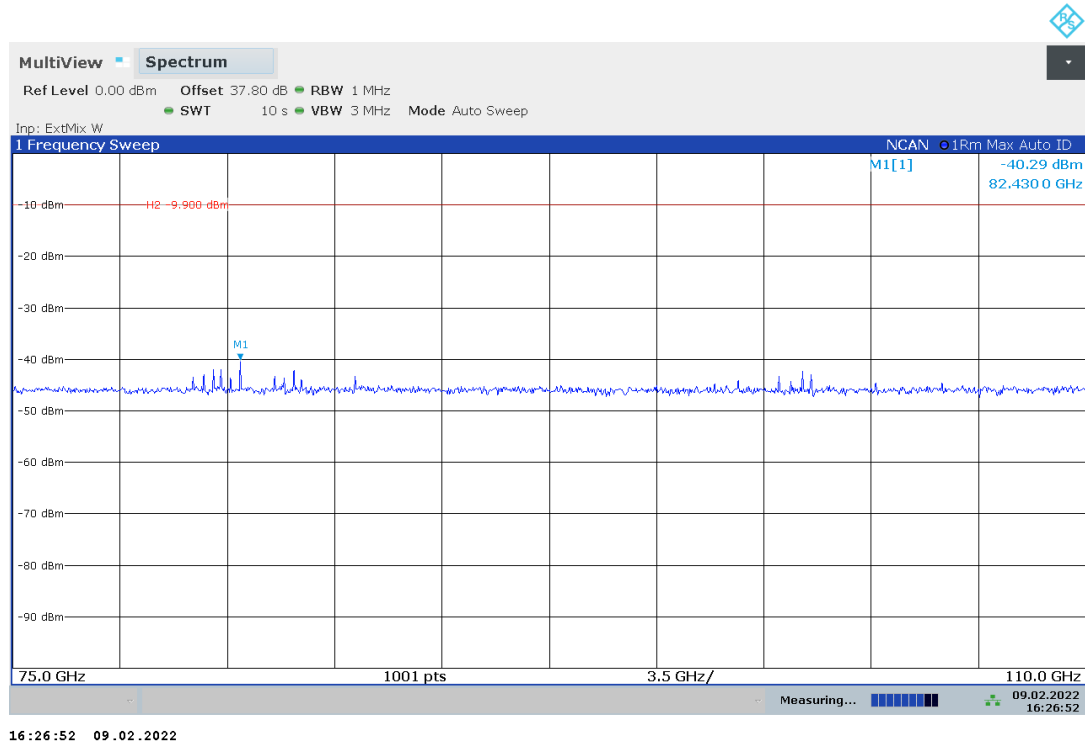


Plot no. 60: radiated emissions 110 GHz – 122 GHz, hor./vert. polarization, 1 GHz mode, BMT

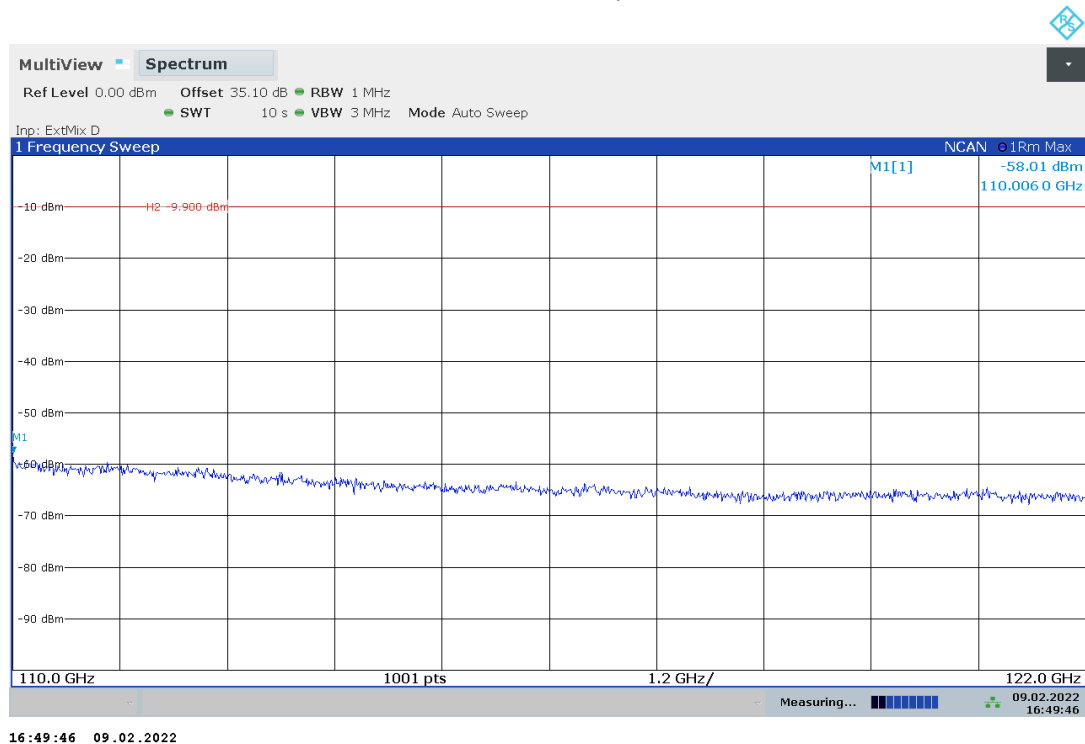


TR no.: **21025154-22149-0**

**2022-04-01**

Plot no. 61: radiated emissions 123 GHz – 140 GHz, hor./vert. polarization, 1 GHz mode, BMT

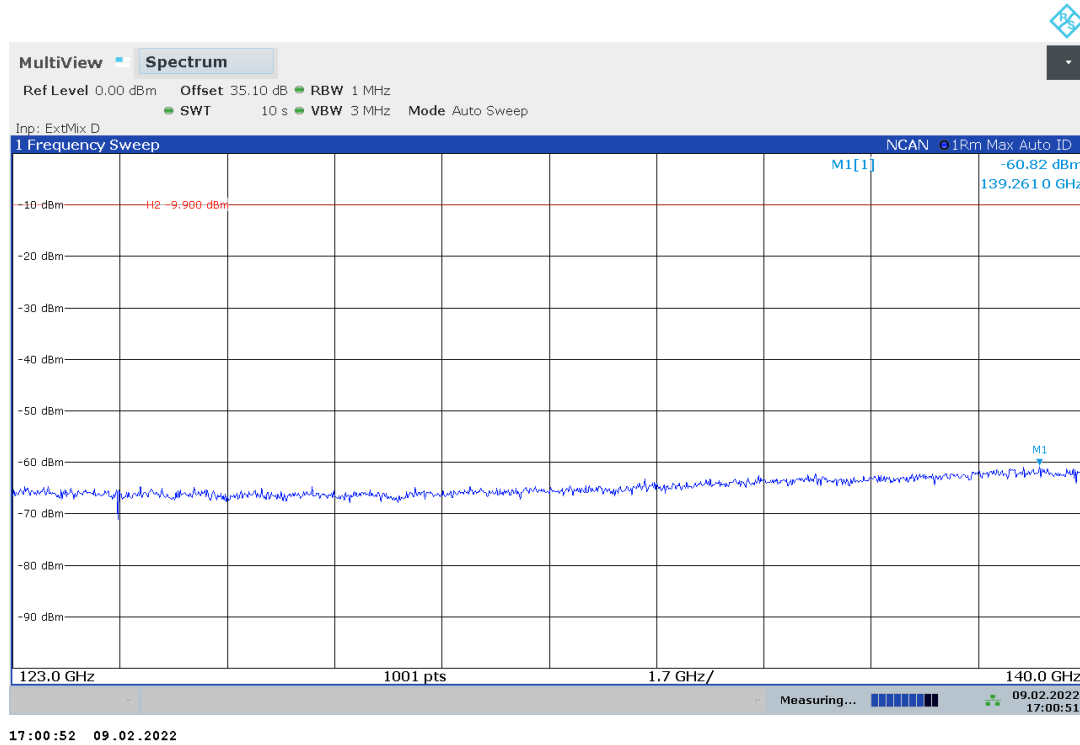


Plot no. 62: radiated emissions 140 GHz – 220 GHz, hor./vert. polarization, 1 GHz mode, BMT

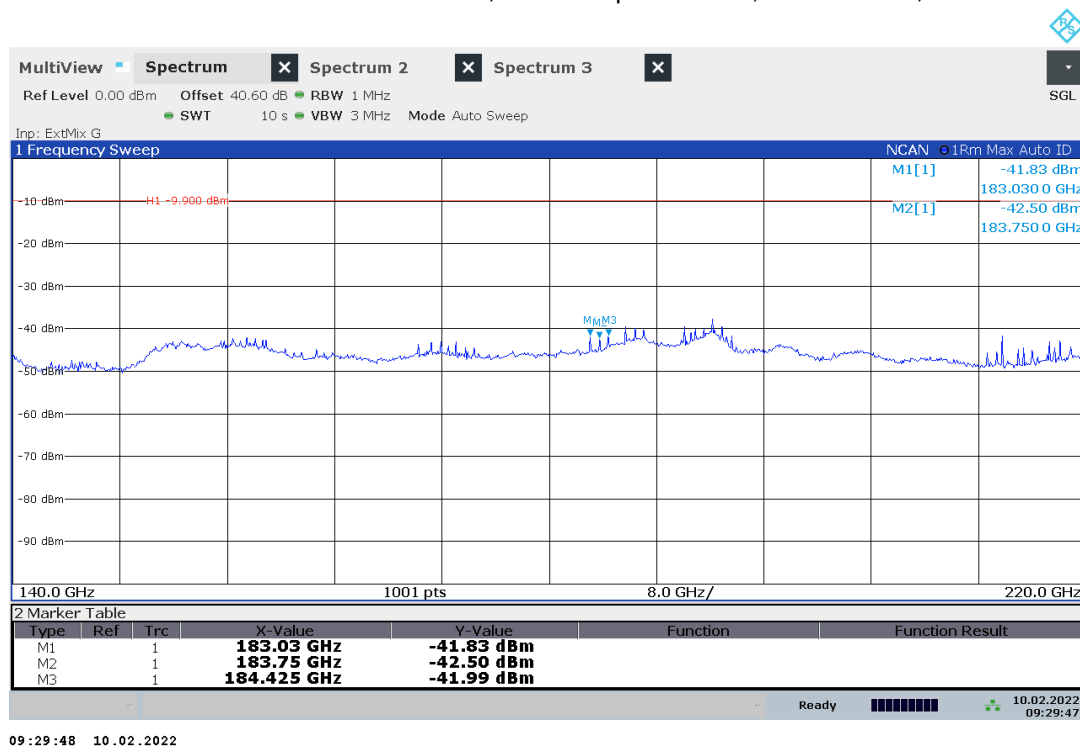


TR no.: **21025154-22149-0**

**2022-04-01**

Plot no. 63: radiated emissions 220 GHz – 325 GHz, hor./vert. polarization, 1 GHz mode, BMT

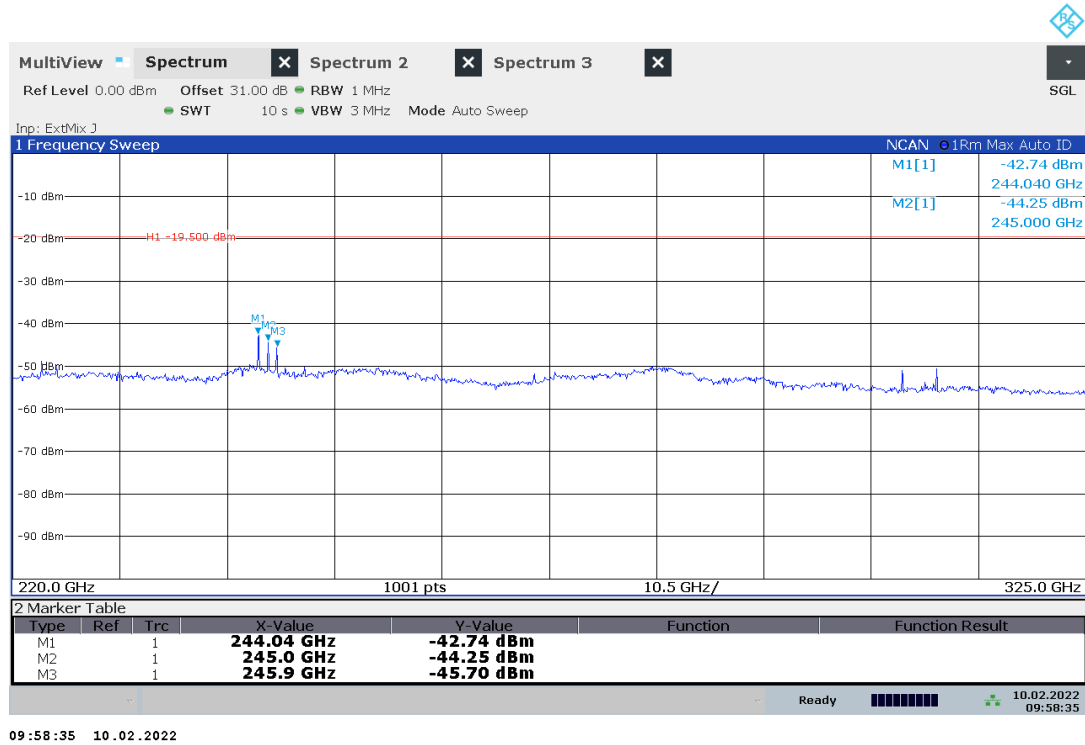

Plot no. 64: radiated emissions 325 GHz – 375 GHz, hor./vert. polarization, 1 GHz mode, BMT

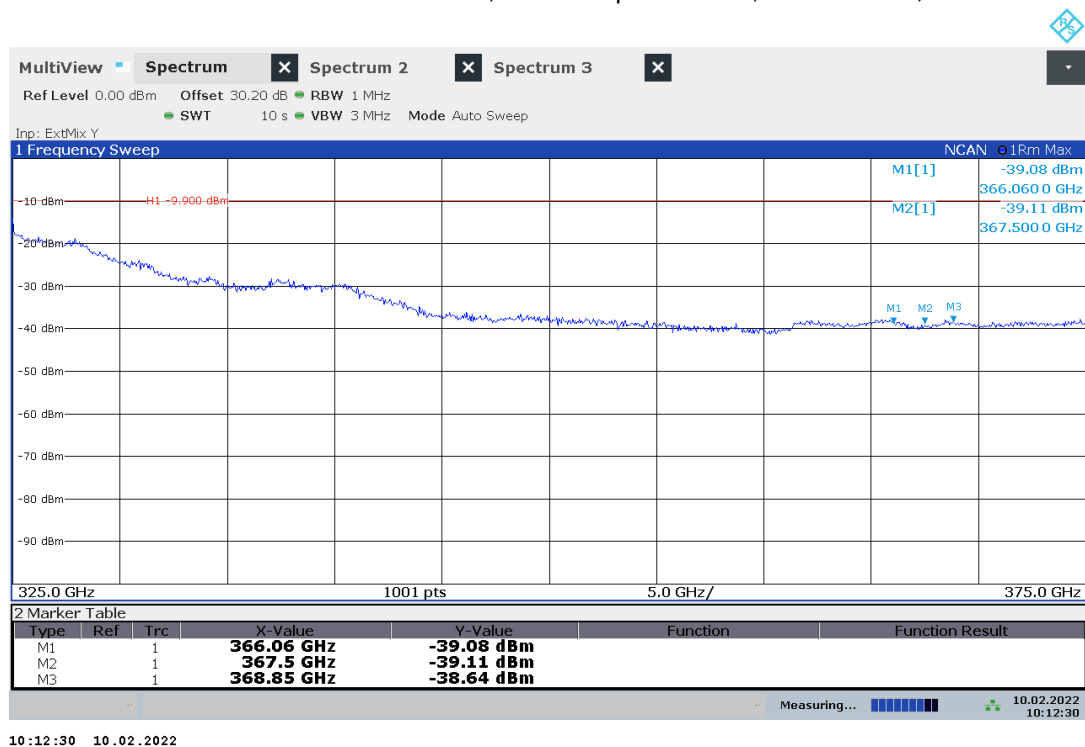

## 7.4 Frequency stability

### Description / Limits

§15.258(d) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range  $-20$  to  $+50$  degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

### Test procedure

ANSI C63.10, 6.9

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### Test results / Note

Please see measurement results for occupied bandwidth.


## 8 Test Setup Description

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Cyclically chamber inspections and range calibrations are performed. Where possible resp. necessary, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

## 8.1 Semi Anechoic Chamber with Ground Plane

Radiated measurements are performed in vertical and horizontal plane in the frequency range 30 MHz to 1 GHz in a Semi Anechoic Chamber with a metallic ground plane. The EUT is positioned on a non-conductive test table with a height of 0.80 m above the metallic ground plane that covers the whole chamber. The receiving antennas conform to specification ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices. These antennas can be moved over the height range between 1.0 m and 4.5 m in order to search for maximum field strength emitted from the EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by a spectrum analyzer where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

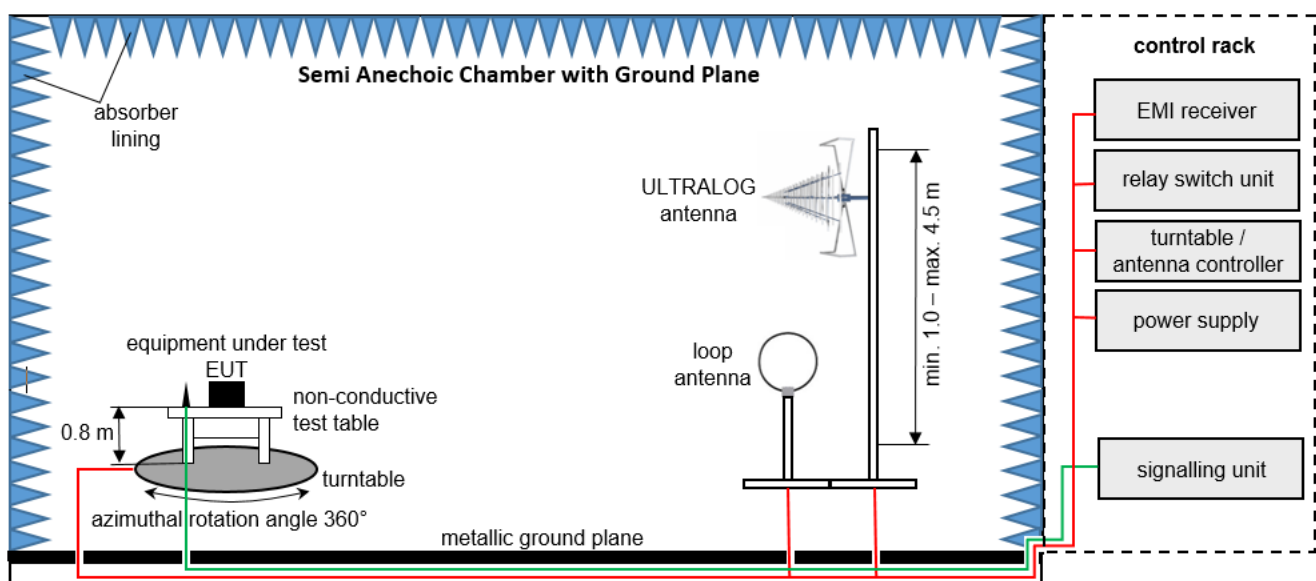

Measurement distance: ULTRALOG antenna 3 m; loop antenna 3 m  
EMC32 software version: 11.10.00

$FS = UR + CL + AF$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$

### List of test equipment used:

| No. | Equipment                        | Manufacturer                    | Type                           | Serial No.   | IBL No.   | Kind of Calibration | Last / Next Calibration       |
|-----|----------------------------------|---------------------------------|--------------------------------|--------------|-----------|---------------------|-------------------------------|
| 1   | Power Supply                     | Elektro-Automatik GmbH & Co. KG | EA-PSI 9080-40 T               | 2000230001   | LAB000313 | NE                  | –                             |
| 2   | Test table                       | innco systems GmbH              | PT1208-080-RH                  | -            | LAB000306 | NE                  | –                             |
| 3   | Positioner                       | maturo GmbH                     | TD 1.5-10KG                    |              | LAB000258 | NE                  | –                             |
| 4   | Compressed Air                   | Implotex                        | 1-850-30                       | -            | LAB000256 | NE                  | –                             |
| 5   | EMI Test Receiver                | Rohde & Schwarz                 | ESW26                          | 101481       | LAB000236 | K                   | 2021-07-01 → 12M → 2022-07-01 |
| 6   | Semi-Anechoic Chamber (SAC)      | Albatross Projects GmbH         | SAC 5 (Babylon 5)              | 20168.PR.B   | LAB000235 | ZW                  | 2020-08-24 → 36M → 2023-08-24 |
| 7   | Measurement Software             | Rohde & Schwarz                 | EMC32 V11.00.10                |              | LAB000226 | NE                  | –                             |
| 8   | Turntable                        | maturo GmbH                     | TT2.0-2t                       | TT2.0-2t/921 | LAB000225 | NE                  | –                             |
| 9   | Antenna Mast                     | maturo GmbH                     | CAM4.0-P                       | CAM4.0-P/316 | LAB000224 | NE                  | –                             |
| 10  | Antenna Mast                     | maturo GmbH                     | BAM4.5-P                       | BAM4.5-P/272 | LAB000223 | NE                  | –                             |
| 11  | Controller                       | maturo GmbH                     | FCU 3.0                        | 10082        | LAB000222 | NE                  | –                             |
| 12  | Power Supply                     | Elektro-Automatik GmbH & Co. KG | PS 2042-10 B                   | 2878350292   | LAB000191 | NE                  | –                             |
| 13  | Open Switch and Control Platform | Rohde & Schwarz                 | OSP200 Base Unit 2HU           | 101748       | LAB000149 | NE                  | –                             |
| 14  | Antenna                          | Rohde & Schwarz                 | HF907                          | 102898       | LAB000124 | K                   | 2020-04-23 → 36M → 2023-04-23 |
| 15  | Antenna                          | Rohde & Schwarz                 | HL562E                         | 102001       | LAB000123 | K                   | 2020-07-05 → 36M → 2023-07-05 |
| 16  | Antenna                          | Rohde & Schwarz                 | HFH2-Z2E - Active Loop Antenna | 100954       | LAB000108 | K                   | 2020-03-25 → 36M → 2023-03-25 |
| 17  | Pre-Amplifier                    | Schwarzbeck Mess-Elektronik OHG | BBV 9718 C                     | 84           | LAB000169 | NE                  | –                             |

## 8.2 Fully Anechoic Chamber

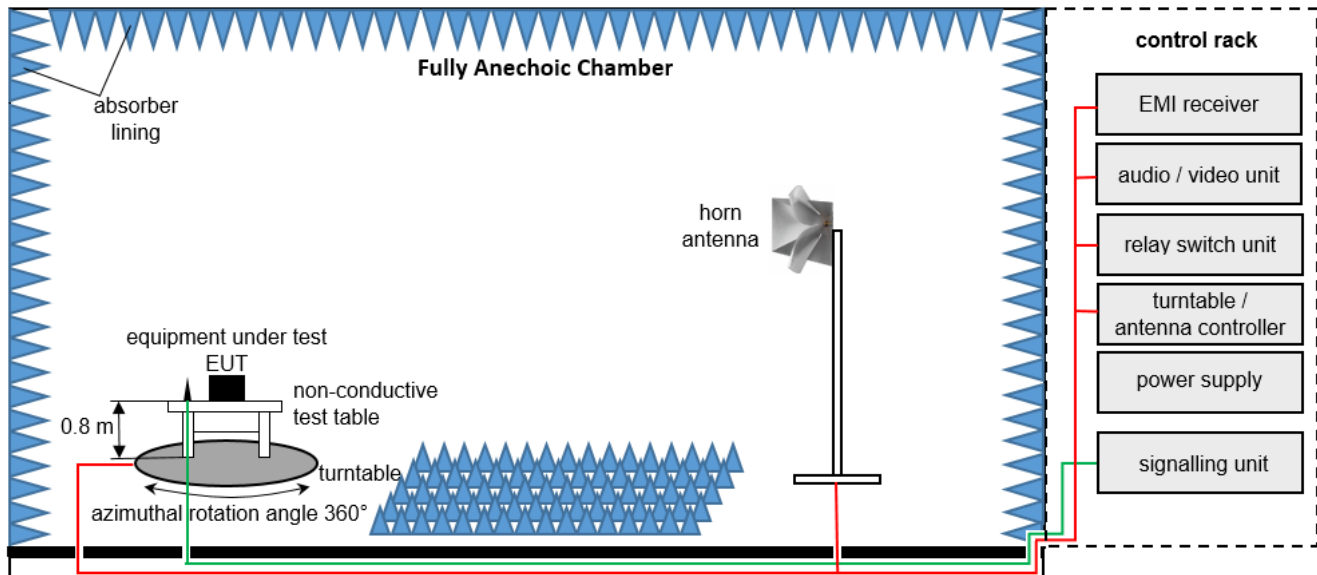

Measurement distance: horn antenna 3 m

EMC32 software version: 11.10.00

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

FS [dBμV/m] = 40.0 [dBμV/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dBμV/m] (71.61 μV/m)


### List of test equipment used:

| No. | Equipment                        | Manufacturer                    | Type                           | Serial No.   | IBL No.   | Kind of Calibration | Last / Next Calibration       |
|-----|----------------------------------|---------------------------------|--------------------------------|--------------|-----------|---------------------|-------------------------------|
| 1   | Power Supply                     | Elektro-Automatik GmbH & Co. KG | EA-PSI 9080-40 T               | 2000230001   | LAB000313 | NA                  | –                             |
| 2   | Test table                       | innco systems GmbH              | PT1208-080-RH                  | -            | LAB000306 | NA                  | –                             |
| 3   | Positioner                       | mature GmbH                     | TD 1.5-10KG                    |              | LAB000258 | NA                  | –                             |
| 4   | Compressed Air                   | Implotex                        | 1-850-30                       | -            | LAB000256 | NA                  | –                             |
| 5   | EMI Test Receiver                | Rohde & Schwarz                 | ESW26                          | 101481       | LAB000236 | K                   | 2021-07-01 → 12M → 2022-07-01 |
| 6   | Semi-Anechoic Chamber (SAC)      | Albatross Projects GmbH         | SAC 5 (Babylon 5)              | 20168.PR.B   | LAB000235 | ZW                  | 2020-07-23 → 12M → 2023-07-23 |
| 7   | Measurement Software             | Rohde & Schwarz                 | EMC32 V11.00.10                |              | LAB000226 | NA                  | –                             |
| 8   | Turntable                        | mature GmbH                     | TT2.0-2t                       | TT2.0-2t/921 | LAB000225 | NA                  | –                             |
| 9   | Antenna Mast                     | mature GmbH                     | CAM4.0-P                       | CAM4.0-P/316 | LAB000224 | NA                  | –                             |
| 10  | Antenna Mast                     | mature GmbH                     | BAM4.5-P                       | BAM4.5-P/272 | LAB000223 | NA                  | –                             |
| 11  | Controller                       | mature GmbH                     | FCU 3.0                        | 10082        | LAB000222 | NA                  | –                             |
| 12  | Power Supply                     | Elektro-Automatik GmbH & Co. KG | PS 2042-10 B                   | 2878350292   | LAB000191 | NA                  | –                             |
| 13  | Open Switch and Control Platform | Rohde & Schwarz                 | OSP200 Base Unit 2HU           | 101748       | LAB000149 | NA                  | –                             |
| 14  | Antenna                          | Rohde & Schwarz                 | HF907                          | 102898       | LAB000124 | K                   | 2020-04-23 → 36M → 2023-04-23 |
| 15  | Antenna                          | Rohde & Schwarz                 | HL562E                         | 102001       | LAB000123 | K                   | 2020-07-05 → 36M → 2023-07-05 |
| 16  | Antenna                          | Rohde & Schwarz                 | HFH2-Z2E - Active Loop Antenna | 100954       | LAB000108 | K                   | 2020-03-25 → 36M → 2023-03-25 |
| 17  | Pre-Amplifier                    | Schwarzbeck Mess-Elektronik OHG | BBV 9718 C                     | 84           | LAB000169 | NA                  | –                             |

### 8.3 Radiated measurements > 18 GHz

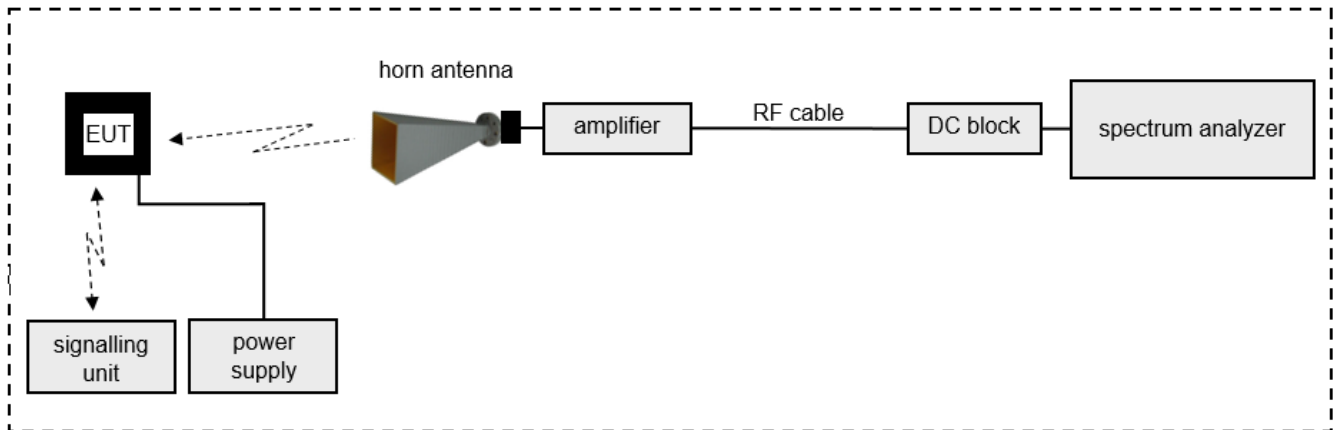

### 8.4 Radiated measurements > 50 GHz

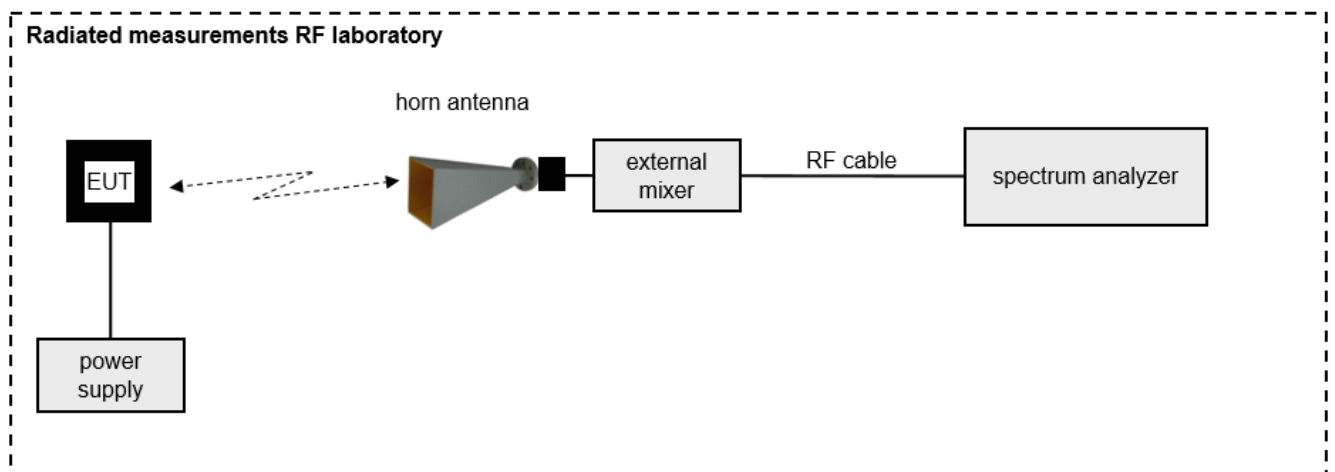

Measurement distance: horn antenna e.g. 50 cm

$FS = UR + CA + AF$


(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$


Note: conversion loss of mixer is already included in analyzer value.

## 8.5 Radiated measurements > EIRP power

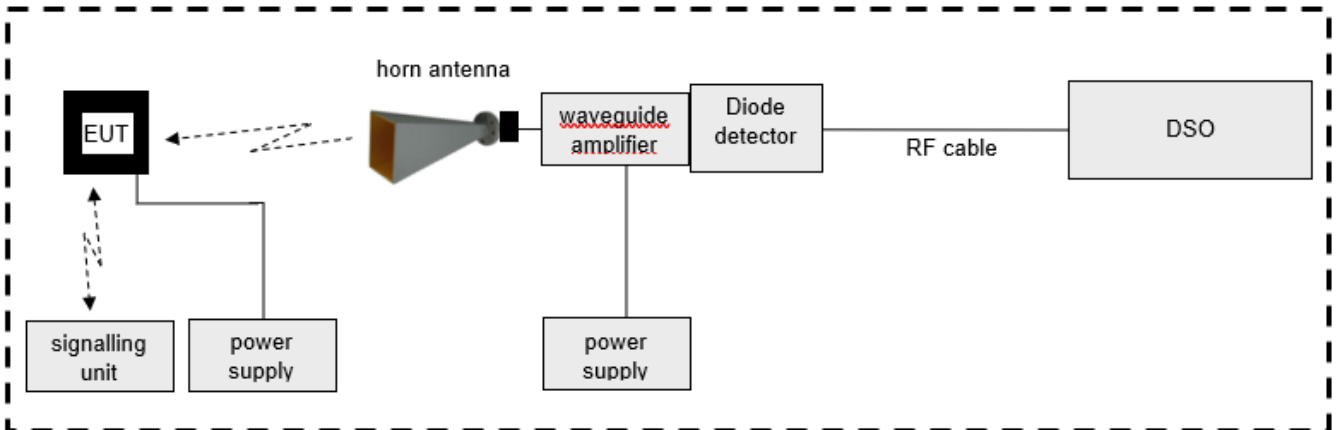

According to ANSI 63.10 9.11 Measurement of the fundamental emission using an RF detector diode.

## 8.6 Radiated measurements under extreme conditions

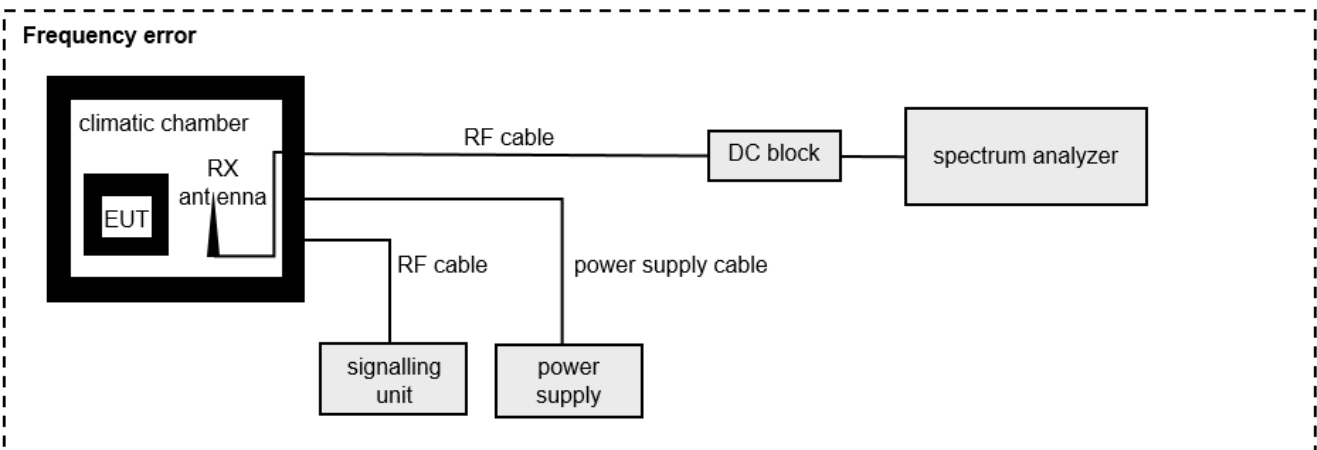

### List of test equipment used:

| No. | Equipment            | Manufacturer                    | Type                   | Serial No. | IBL No.   | Kind of Calibration | Last / Next Calibration       |
|-----|----------------------|---------------------------------|------------------------|------------|-----------|---------------------|-------------------------------|
| 1   | Antenna Mast         | Schwarzbeck Mess-Elektronik OHG | AM 9104                | 99         | LAB000109 | NA                  | –                             |
| 21  | Climatic Chamber     | CTS GmbH                        | T-65/50                | 204002     | LAB000110 | ZW                  | 2021-06-18 → 12M → 2022-06-18 |
| 2   | Spectrum Analyser    | Rohde & Schwarz                 | FSW50                  | 101450     | LAB000111 | K                   | 2021-07-22 → 12M → 2022-07-22 |
| 3   | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z075                | 102015     | LAB000112 | K                   | 2021-03-31 → 12M → 2022-03-31 |
| 4   | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z090                | 102020     | LAB000113 | K                   | 2021-03-31 → 12M → 2022-03-31 |
| 5   | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z110                | 102000     | LAB000114 | K                   | 2021-04-07 → 12M → 2022-04-07 |
| 6   | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z140                | 101144     | LAB000115 | K                   | 2021-05-19 → 12M → 2022-05-19 |
| 7   | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z220                | 101039     | LAB000116 | K                   | 2021-05-18 → 12M → 2022-05-18 |
| 8   | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z325                | 101015     | LAB000117 | K                   | 2021-05-19 → 12M → 2022-05-19 |
| 9   | Signal Generator     | Rohde & Schwarz                 | SMA100-B-50            | 103838     | LAB000118 | K                   | 2021-06-30 → 36M → 2024-06-30 |
| 10  | Power Meter          | Rohde & Schwarz                 | NRP110T                | 101151     | LAB000119 | k                   | 2021-07-01 → 12M → 2022-07-01 |
| 11  | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z170                | 100996     | LAB000126 | K                   | 2021-05-18 → 12M → 2022-05-18 |
| 12  | Antenna              | Flann Microwave Ltd             | 20240-20               | 266403     | LAB000128 | K                   | 2020-06-29 → 36M → 2023-06-29 |
| 13  | Antenna              | Flann Microwave Ltd             | 22240-20               | 270448     | LAB000130 | K                   | 2020-06-29 → 36M → 2023-06-29 |
| 14  | Antenna              | Flann Microwave Ltd             | 25240-20               | 272860     | LAB000133 | CM                  | 2020-07-01 → 36M → 2023-07-01 |
| 15  | Antenna              | Flann Microwave Ltd             | 26240-20               | 273417     | LAB000135 | CM                  | 2020-08-01 → 36M → 2023-08-01 |
| 16  | Antenna              | Flann Microwave Ltd             | 27240-20               | 273367     | LAB000137 | CM                  | 2020-08-01 → 36M → 2023-08-01 |
| 17  | Antenna              | Flann Microwave Ltd             | 29240-20               | 273382     | LAB000139 | CM                  | 2020-08-01 → 36M → 2023-08-01 |
| 18  | Antenna              | Flann Microwave Ltd             | 32240-20               | 273469     | LAB000152 | CM                  | 2021-09-01 → 36M → 2024-09-01 |
| 19  | Coaxial Cable        | Rosenberger                     | LU7-022-1000           | 33         | LAB000153 | NA                  | –                             |
| 20  | Coaxial Cable        | Rosenberger                     | LU7-022-1000           | 34         | LAB000154 | NA                  | –                             |
| 21  | Coaxial Cable        | Huber & Suhner                  | ST18/48"               | 2276454-02 | LAB000158 | CM                  | 2021-08-16 → 12M → 2022-08-16 |
| 22  | Coaxial Cable        | Huber & Suhner                  | SF101/1.0m             | 503990/1   | LAB000164 | CM                  | 2021-08-16 → 12M → 2022-08-16 |
| 23  | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z500                | 101020     | LAB000174 | k                   | 2020-09-02 → 18M → 2022-03-02 |
| 24  | Digital Oscilloscope | Rohde & Schwarz                 | RTE1204                | 300113     | LAB000175 | K                   | 2021-06-02 → 12M → 2022-06-02 |
| 25  | Antenna              | Flann Microwave Ltd             | 28240-20               | 273371     | LAB000176 |                     | 2021-09-01 → 36M → 2024-09-01 |
| 26  | Antenna              | Flann Microwave Ltd             | 30240-20               | 273390     | LAB000178 | CM                  | 2021-09-01 → 36M → 2024-09-01 |
| 27  | WG-Coax-Adapter      | Flann Microwave Ltd             | 20093-TF30<br>UBR220   | 273374     | LAB000181 | CM                  | 2021-09-01 → 36M → 2024-09-01 |
| 28  | WG-Coax-Adapter      | Flann Microwave Ltd             | 22093-TF30<br>UG599/U  | 273263     | LAB000183 | CM                  | 2021-09-01 → 36M → 2024-09-01 |
| 29  | Power Supply         | Elektro-Automatik GmbH & Co. KG | EA-PS 2042-10 B        | 2878350255 | LAB000189 | NA                  | –                             |
| 30  | Power Supply         | Elektro-Automatik GmbH & Co. KG | EA-PS 2042-10 B        | 2878350263 | LAB000190 | NA                  | –                             |
| 31  | Antenna              | Flann Microwave Ltd             | 570240-20              | 226025     | LAB000228 | CM                  | 2021-09-01 → 36M → 2024-09-01 |
| 32  | Multiplier           | Rohde & Schwarz                 | SMZ110                 | 100001     | LAB000272 | NA                  | –                             |
| 33  | Spectrum Analyser    | Rohde & Schwarz                 | FSW43                  | 101391     | LAB000289 | K                   | 2021-07-02 → 12M → 2022-07-02 |
| 34  | Test table           | innco systems GmbH              | PT0707-RH light        | -          | LAB000303 | NA                  | –                             |
| 35  | Harmonic Mixer       | Rohde & Schwarz                 | FS-Z060                | 101350     | LAB000375 |                     | 2021-07-06 → 12M → 2022-07-06 |
| 36  | Antenna              | Flann Microwave Ltd             | 24240-20               | 275176     | LAB000376 | CM                  | 2021-09-01 → 36M → 2024-09-01 |
| 37  | Detector Diode       | Eravant                         | SFD-903144-08SF-P1     | 13795-01   | LAB000437 | NA                  | –                             |
| 38  | Pre-Amplifier        | Eravant                         | SBL-9531443565-0808-E1 | 13790-01   | LAB000439 | CM                  | 2021-10-21 → 12M → 2022-10-21 |

## 9 Measurement procedures

### 9.1 Radiated spurious emissions from 9 kHz to 30 MHz

#### Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.  
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

#### Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- For each turntable step the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

#### Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated with special 3D adapter set to find maximum level of emissions.
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position and settings of measuring equipment is recorded.

#### Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade of distance in the region closer than  $\lambda$  in m divided by  $2\pi$  (i.e.,  $\lambda/2\pi$ ), and at 20 dB/decade of distance beyond that, using the measurement of a single point at the radial angle that produces the maximum emission.  
This correction is already included in the limit line of corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

## 9.2 Radiated spurious emissions from 30 MHz to 1 GHz

### Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.  
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

### Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable step / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

### Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

### Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region  $\lambda$  in m divided by  $2\pi$  (i.e.,  $\lambda/2\pi$ ), using the measurement of a single point at the radial angle that produces the maximum emission.  
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

### 9.3 Radiated spurious emissions from 1 GHz to 18 GHz

#### Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.  
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

#### Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable step / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

#### Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

#### Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region  $\lambda$  in m divided by  $2\pi$  (i.e.,  $\lambda/2\pi$ ), using the measurement of a single point at the radial angle that produces the maximum emission.  
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

## 9.4 Radiated spurious emissions above 18 GHz

### Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- EUT is powered on and set into operation.
- Test distance depends on EUT size and test antenna size (farfield conditions shall be met).

### Pre-scan

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and for different polarizations of the antenna.

### Final measurement

- Significant emissions found during the pre-scan will be maximized, i.e. position and antenna orientation causing the highest emissions with Peak and RMS detector
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C63.4 / C63.10).
- Final plot showing measurement data, levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit is recorded.

### Note

- In case of measurements with external harmonic mixers (e.g. above 50 GHz) special care is taken to avoid possible overloading of the external mixer's input.
- As external harmonic mixers may generate false images, care is taken to ensure that any emission measured by the spectrum analyzer is indeed radiated from the EUT and not internally generated by the external harmonic mixer. Signal identification feature of spectrum analyzer is used to eliminate/reduce images of the external harmonic mixer.

### Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region  $\lambda$  in m divided by  $2\pi$  (i.e.,  $\lambda/2\pi$ ), using the measurement of a single point at the radial angle that produces the maximum emission.  
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

## 10 MEASUREMENT UNCERTAINTIES

|                               |                   |
|-------------------------------|-------------------|
| Radio frequency               | $\leq \pm 10$ ppm |
| Radiated emission             | $\leq \pm 6$ dB   |
| Temperature                   | $\leq \pm 1$ °C   |
| Humidity                      | $\leq \pm 5$ %    |
| DC and low frequency voltages | $\leq \pm 3$ %    |

The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor  $k = 2$ . It was determined in accordance with EA-4/02 M:2013. The true value is located in the corresponding interval with a probability of 95 %.

## Annex 1 EUT Photographs, external

Photo No. 1:


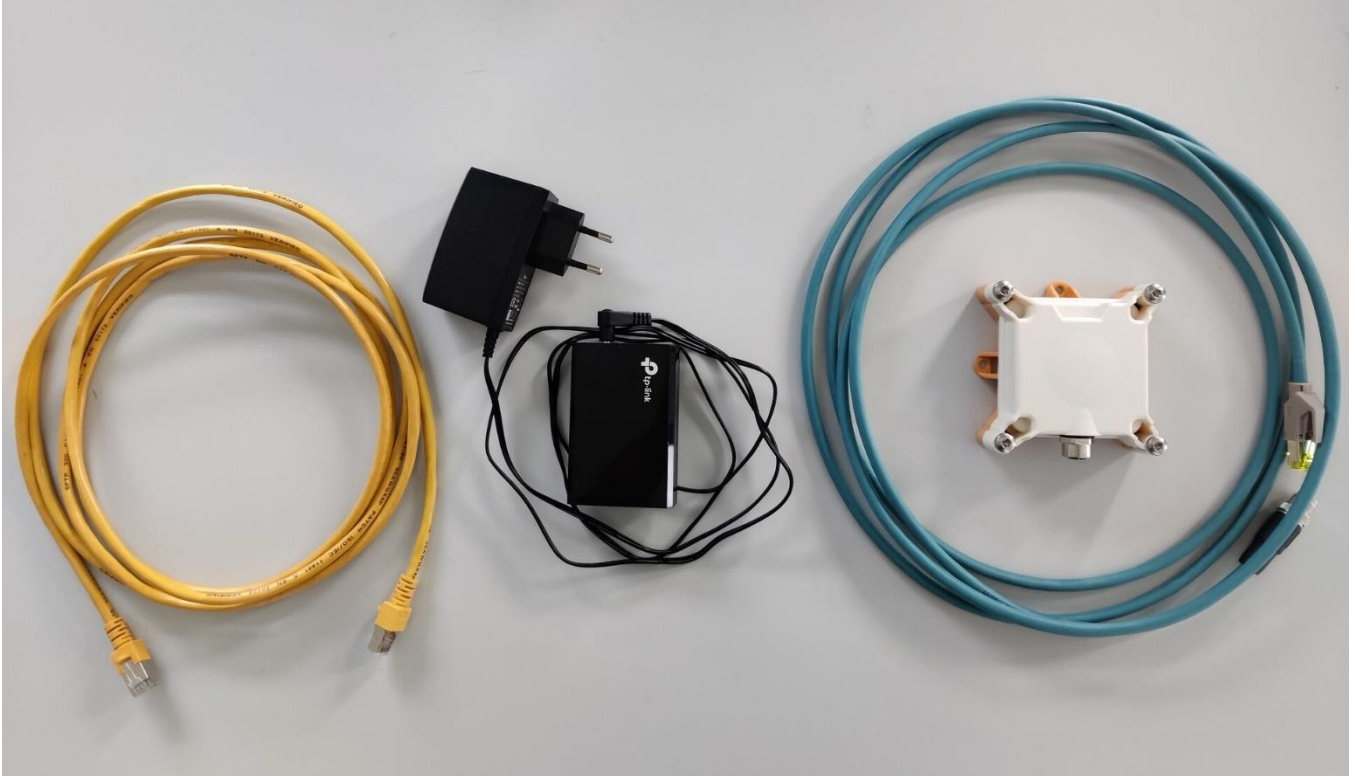


Photo No. 2:

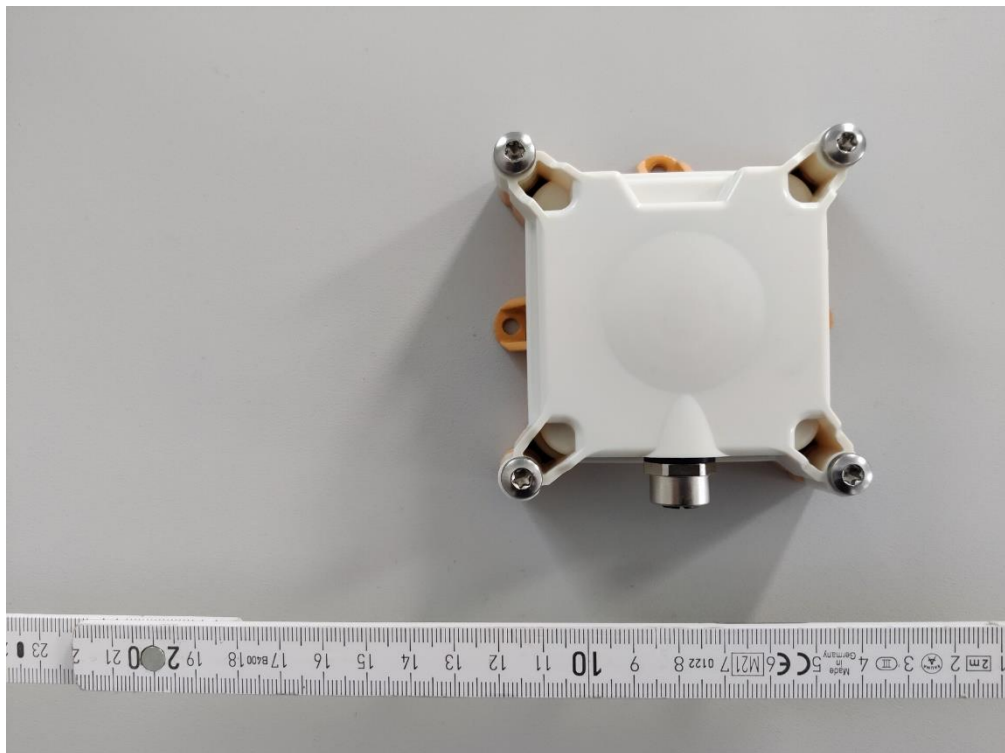

TR no.: **21025154-22149-0**

**2022-04-01**

Photo No. 3:

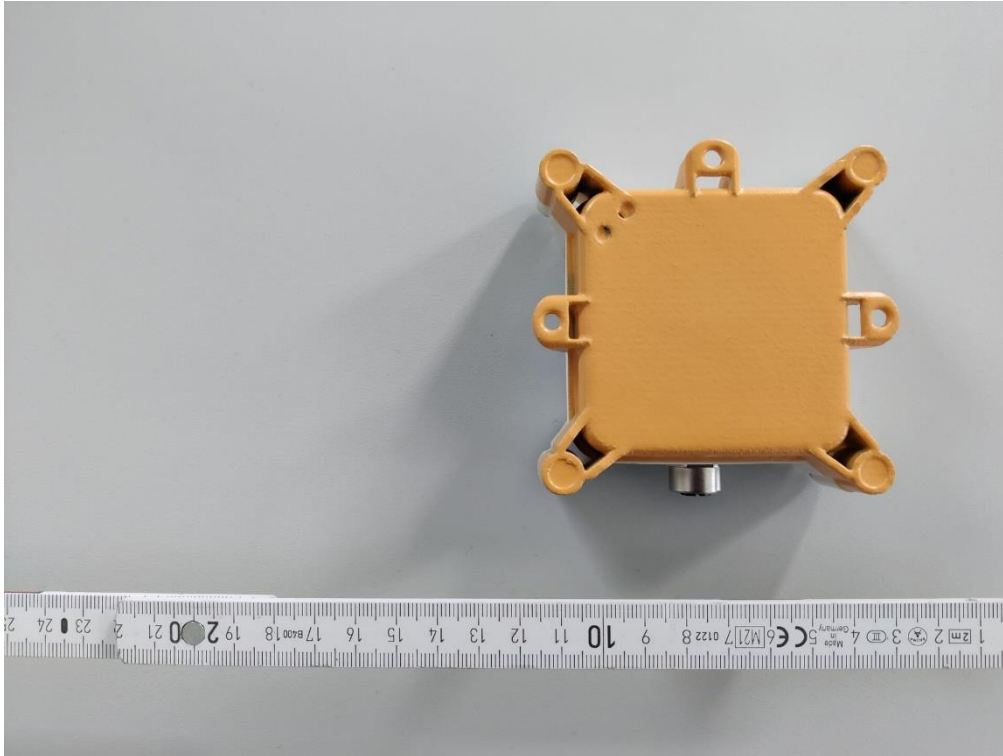


Photo No. 4:



Photo No. 5: PoE-Adapter used for testing



Photo No. 6: PoE-Adapter used for testing



Photo No. 7: Power Supply of PoE-Adapter used for testing



Photo No. 8: Power Supply of PoE-Adapter used for testing



## Annex 2 EUT Photographs, internal

Photo No. 9:

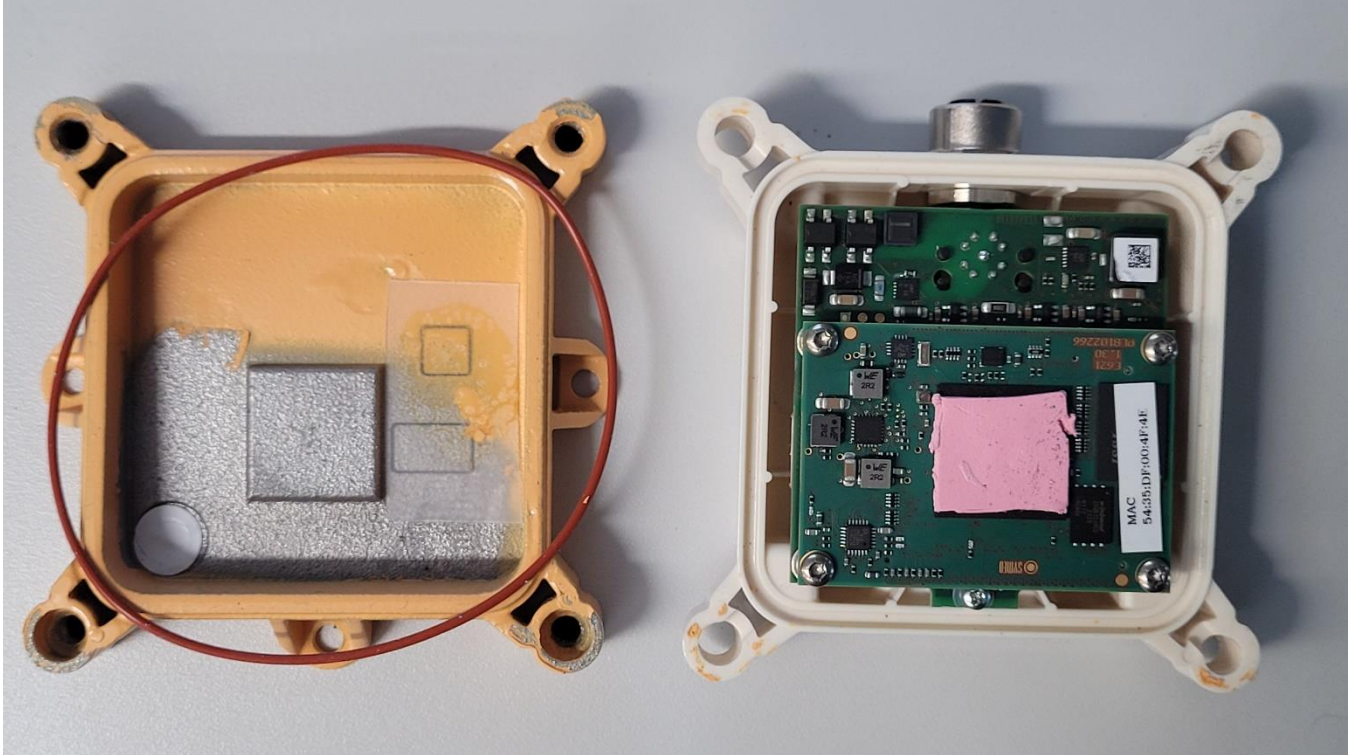


Photo No. 10:

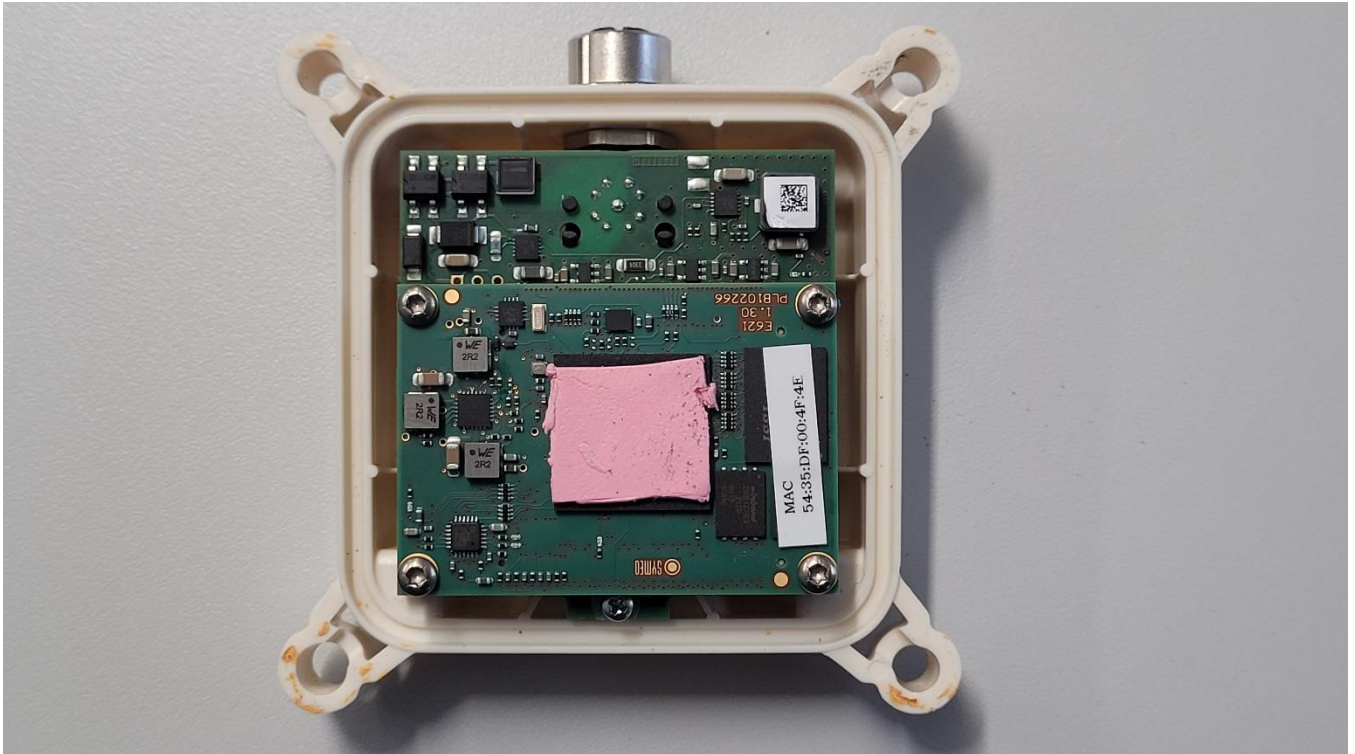


Photo No. 11:

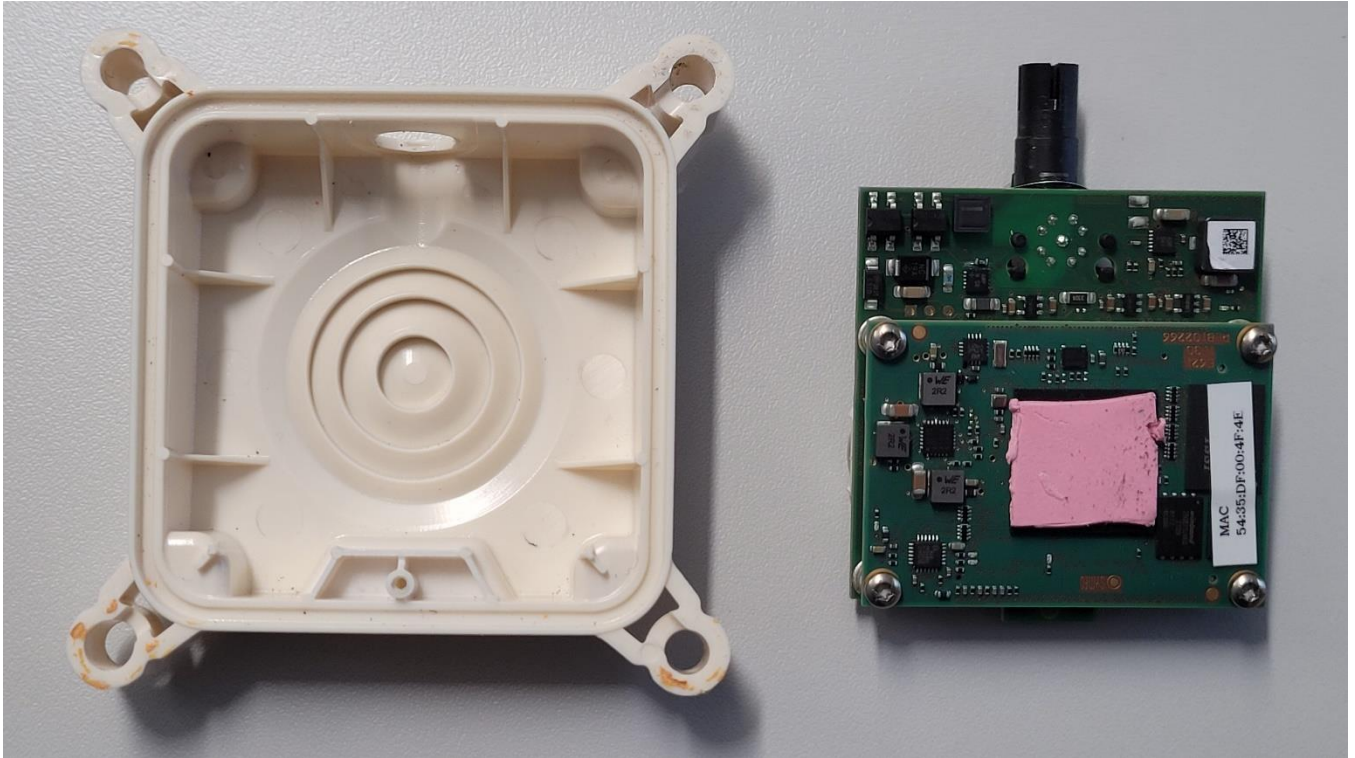


Photo No. 12:



Photo No. 13:

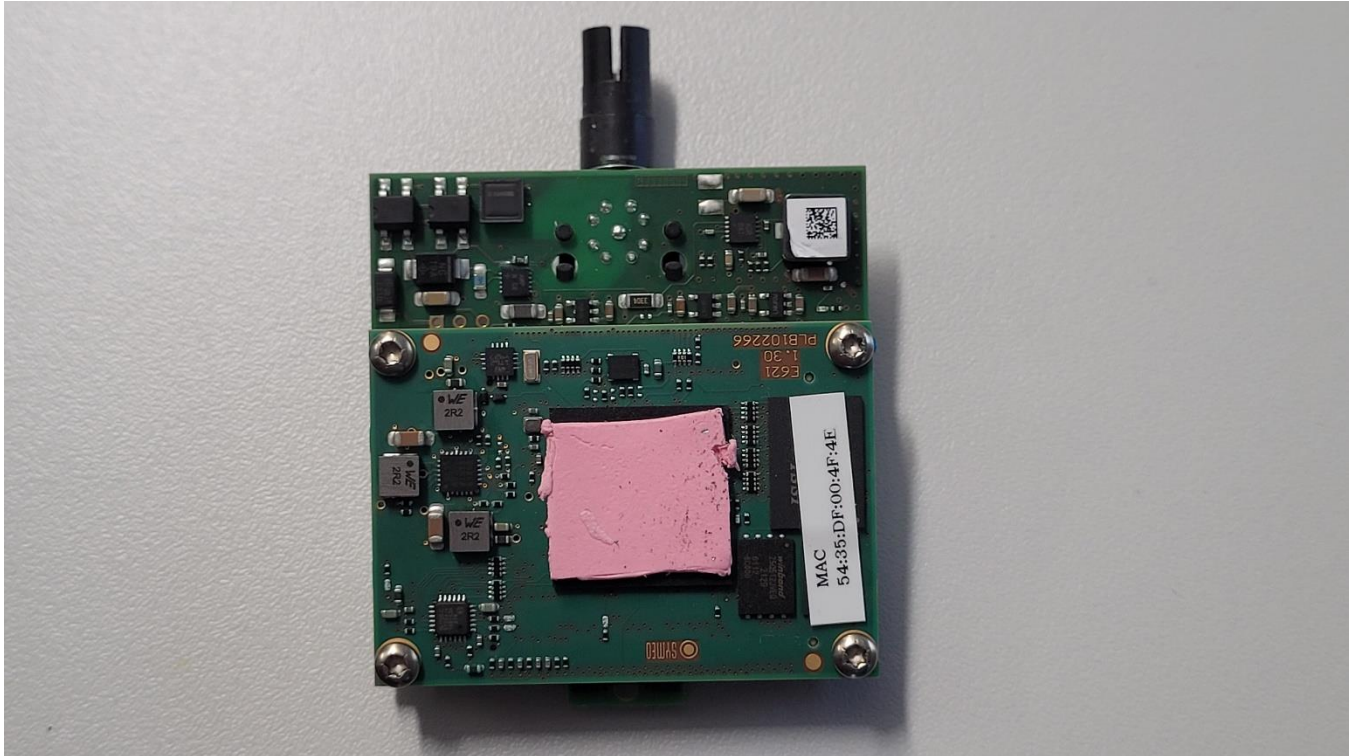


Photo No. 14:

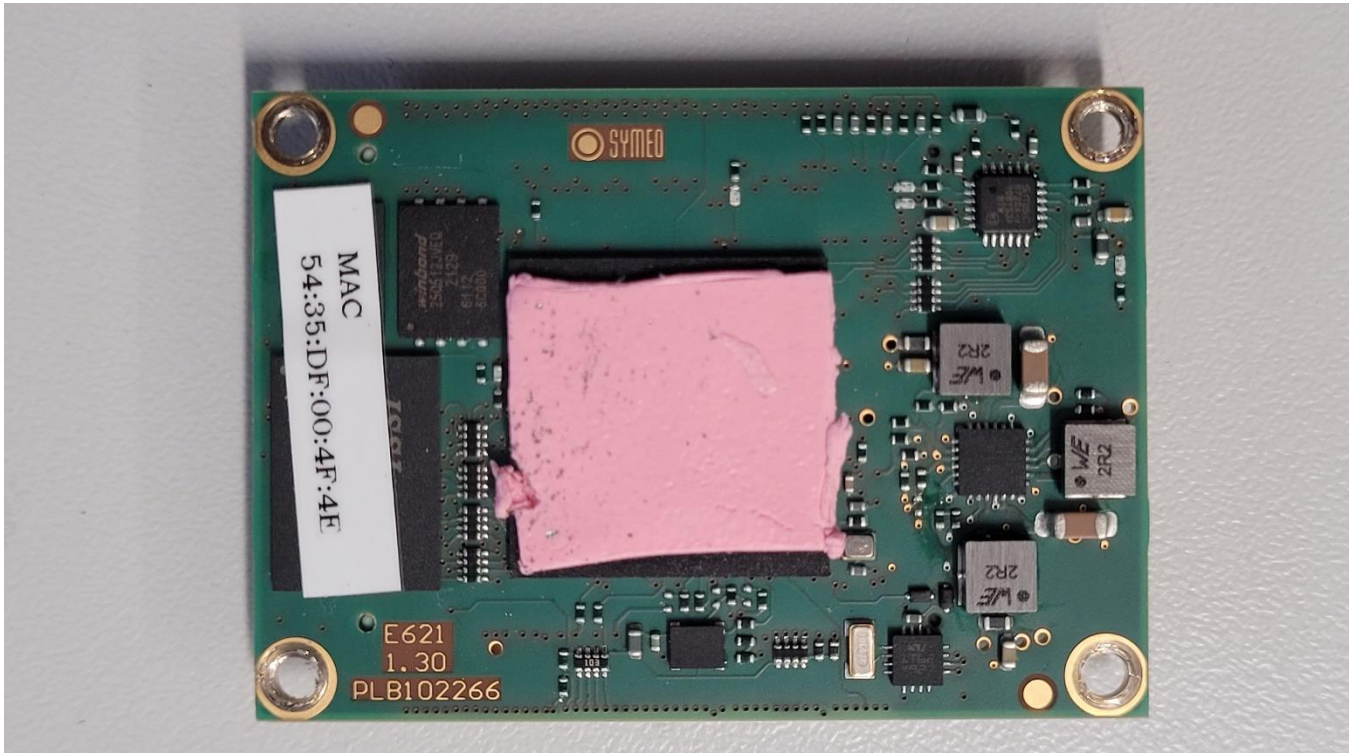


Photo No. 15:

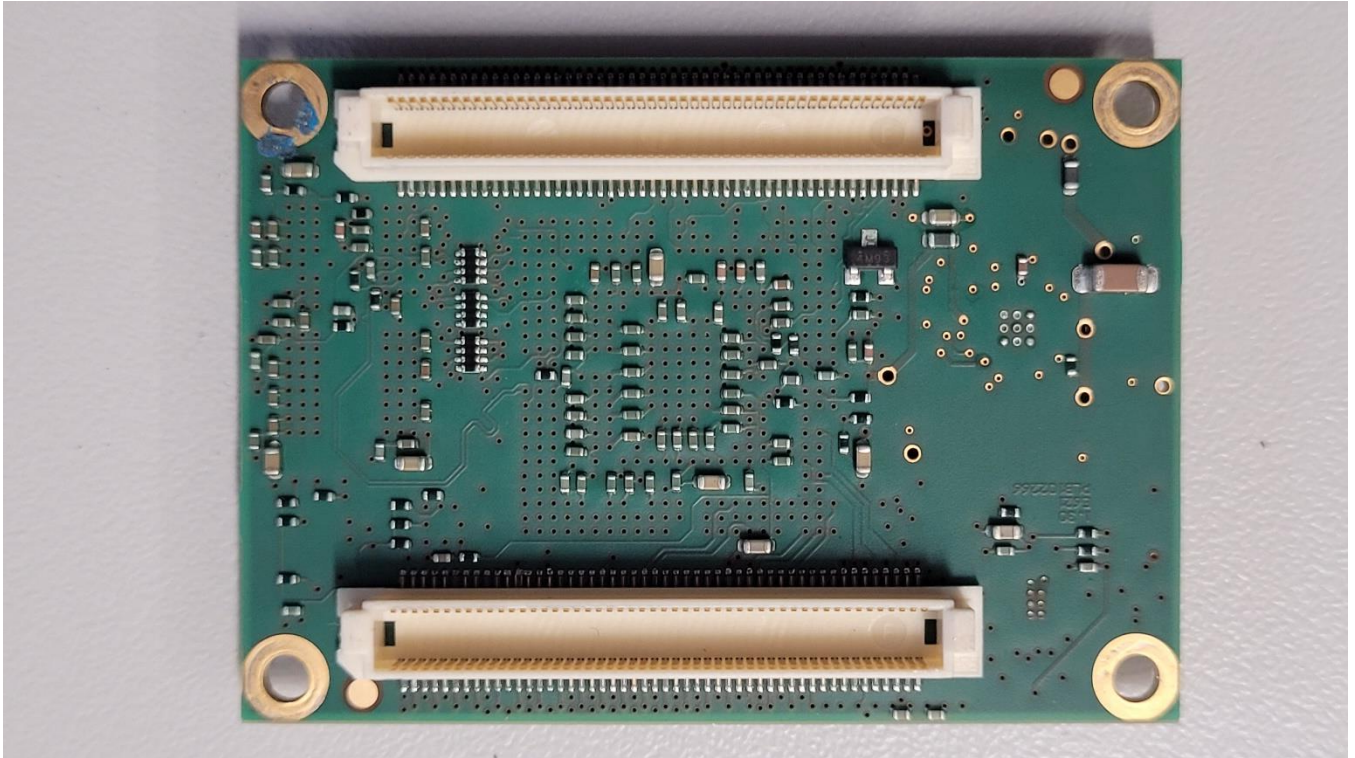


Photo No. 16:

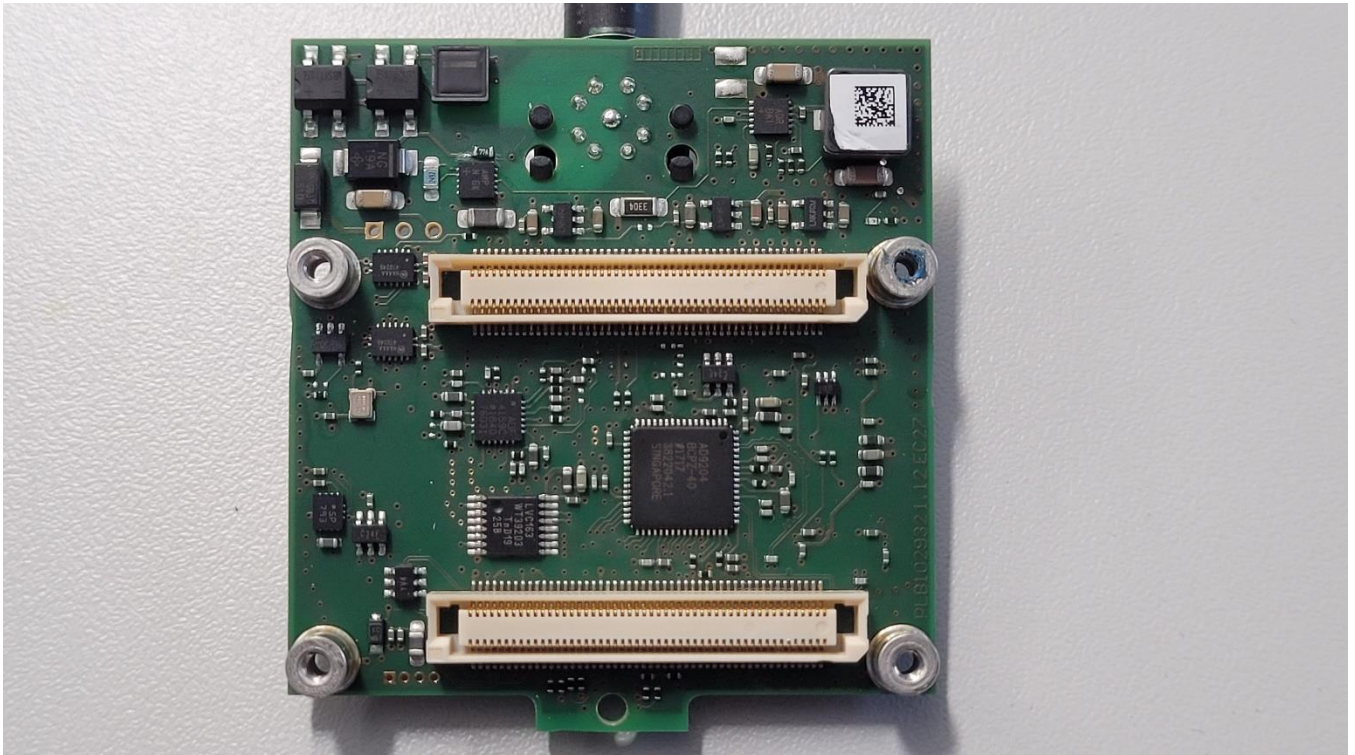


Photo No. 17:


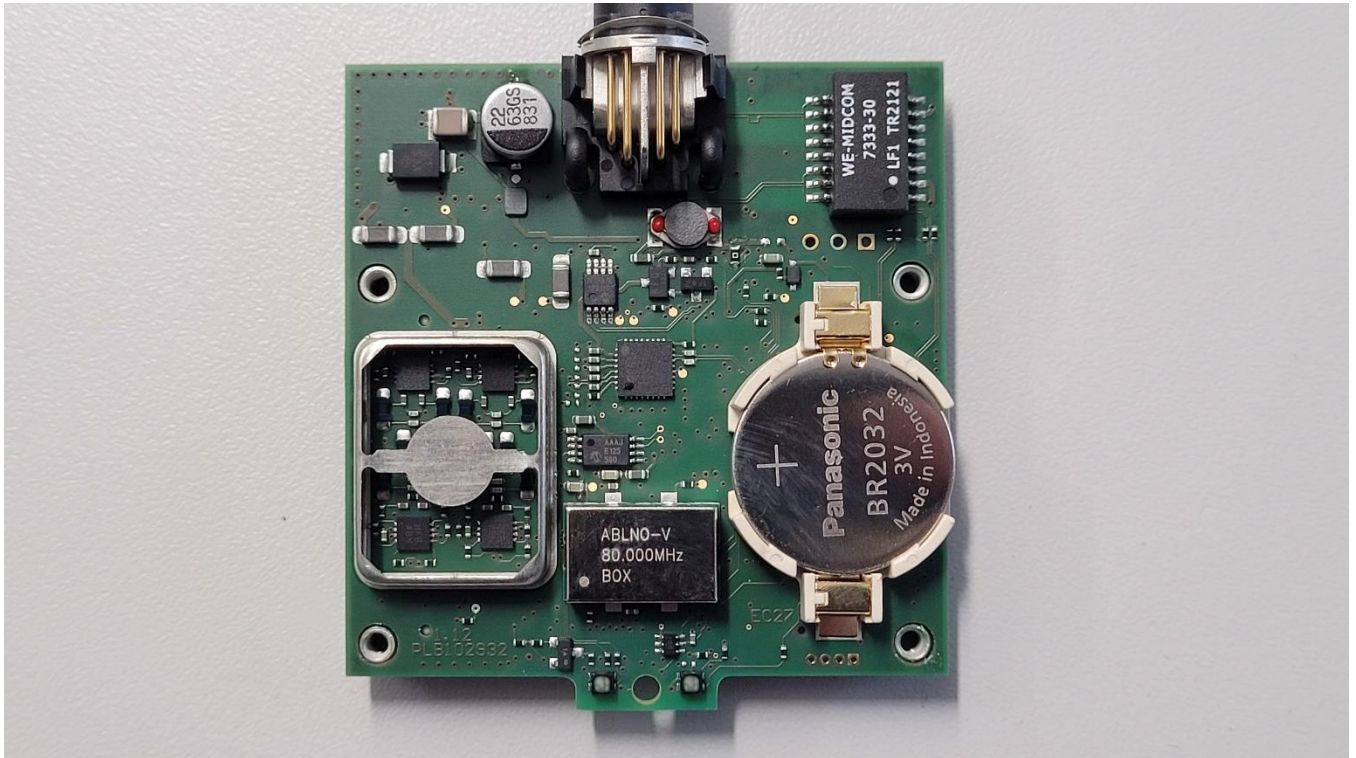


Photo No. 18:

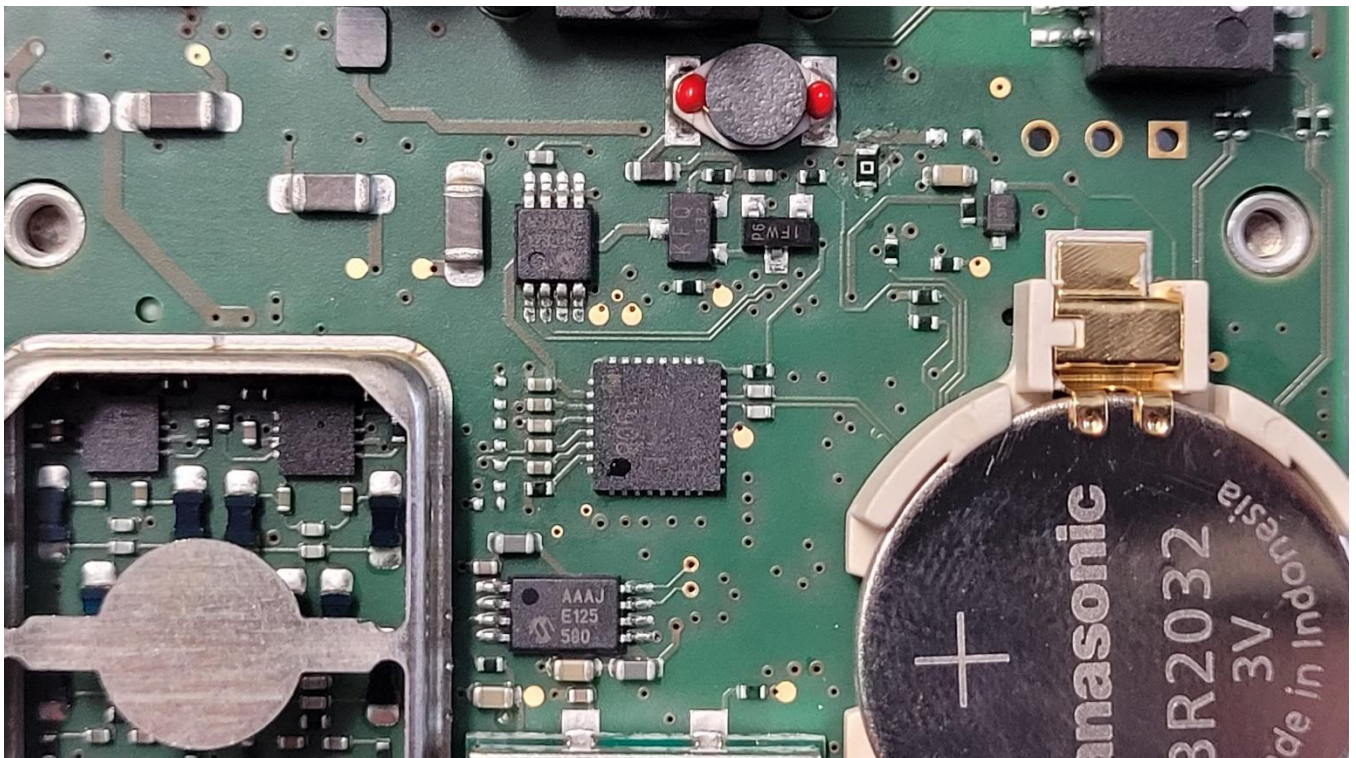

### Annex 3 Test Setup Photographs

Photo No. 19:

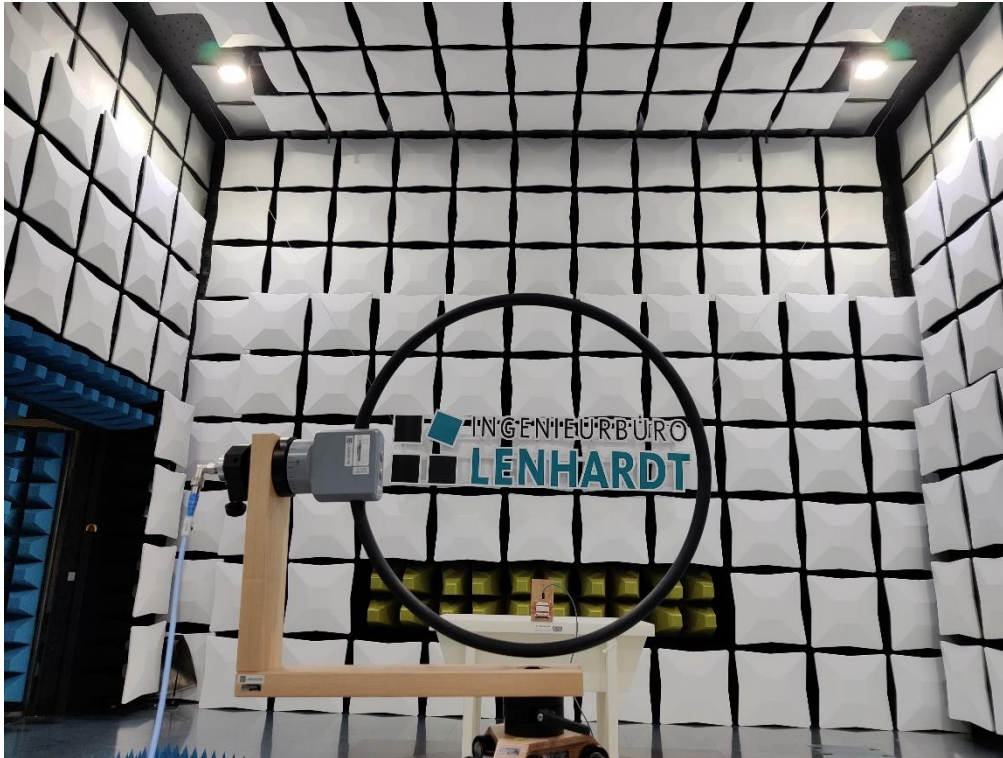


Photo No. 20:



Photo No. 21:

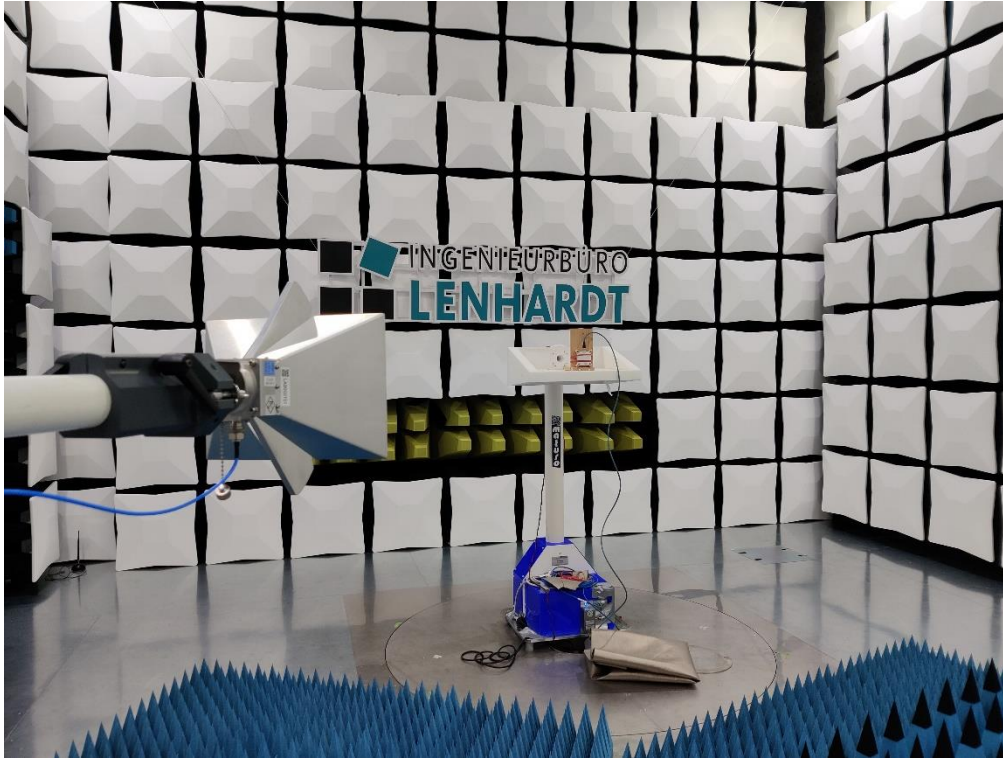


Photo No. 22:

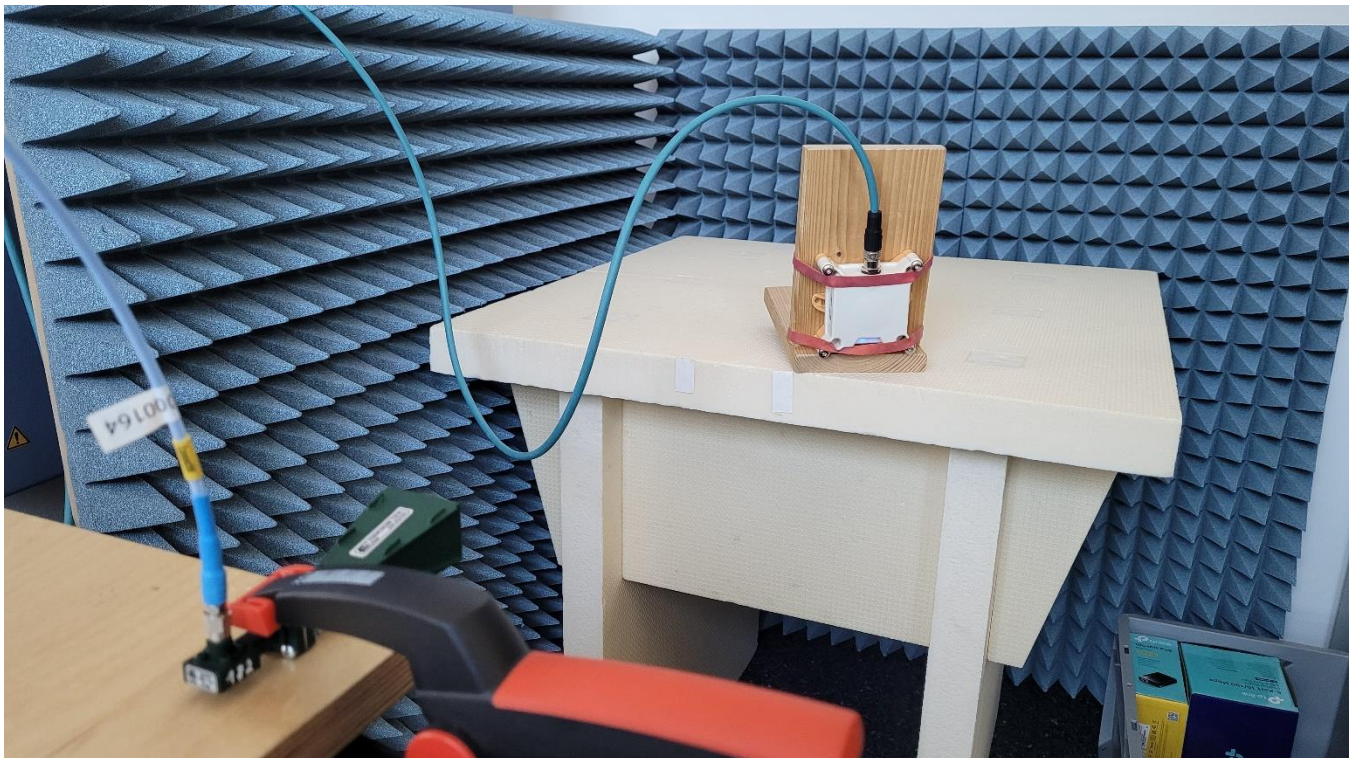


Photo No. 23:

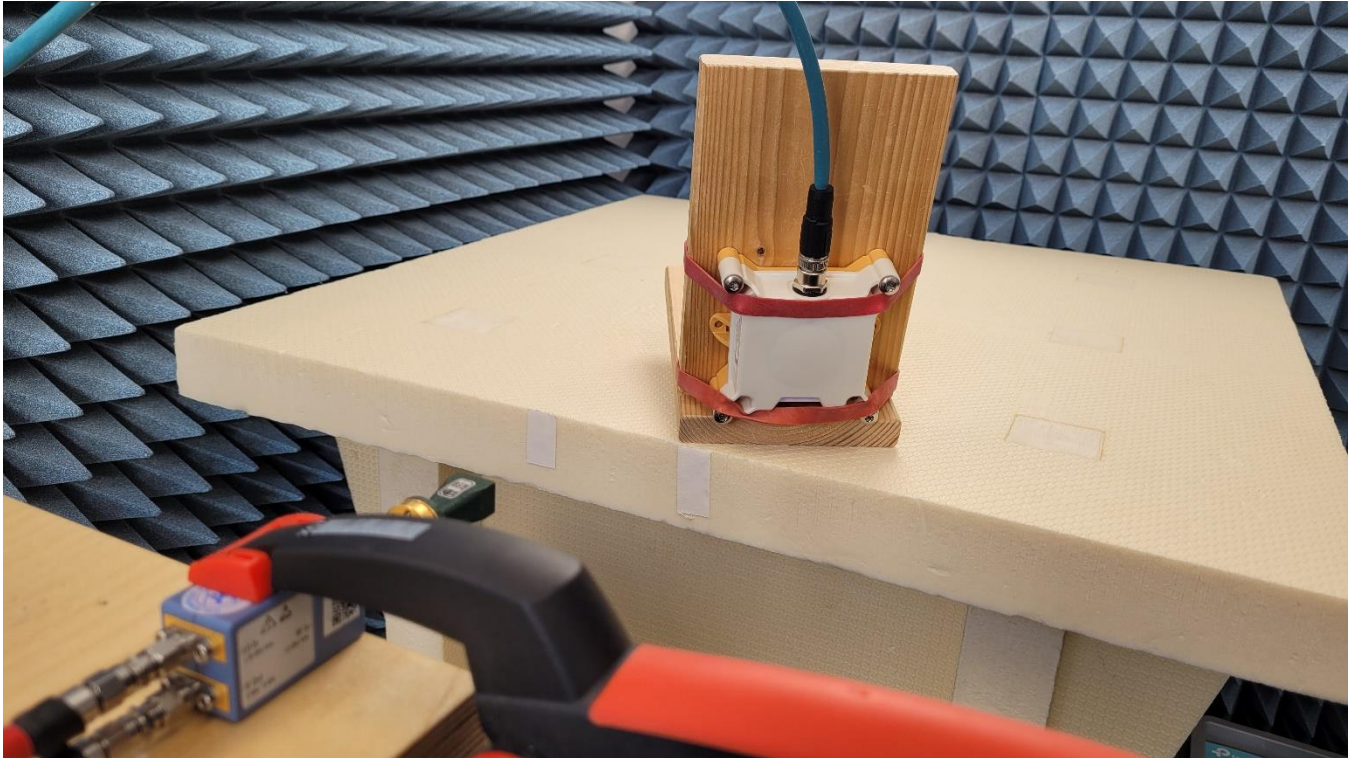



Photo No. 24:



Photo No. 25:



Photo No. 26:

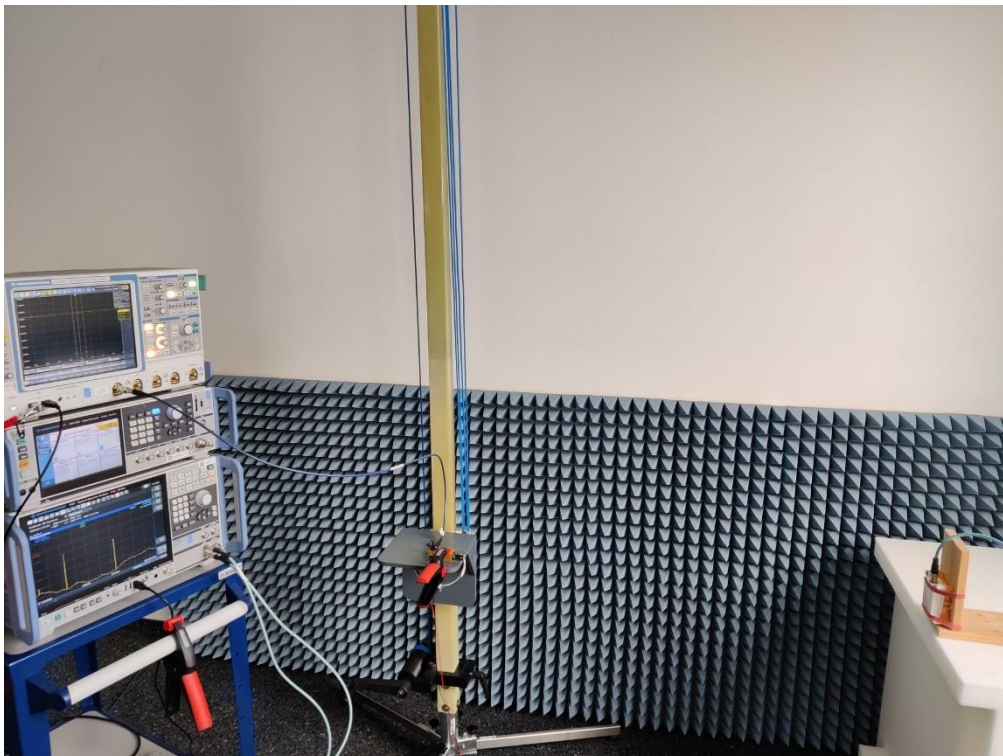

---

## **End of Test Report**

---