

Prüfbericht-Nr.: Test report no.:	IN25JD8U 001	Auftrags-Nr.: Order no.:	146973395 010	Seite 1 von 74 Page 1 of 74
Kunden-Referenz-Nr.: Client reference no.:	2053360	Auftragsdatum: Order date:	2024-10-14	
Auftraggeber: Client:	Fisher Controls International LLC 205 South Center Street, Marshalltown IA 50158, USA			
Prüfgegenstand: Test item:	FISHER™ ARMOR™			
Bezeichnung / Typ-Nr.: Identification / Type no.:	ARMOR 8000			
Auftrags-Inhalt: Order content:	Testing and issue of Test Report with Grant Certificate			
Prüfgrundlage: Test specification:	FCC Part15 SubpartC 15.247; 15.205; 15.207; 15.209 RSS Gen Issue 5; RSS 247 Issue 3			
Wareneingangsdatum: Date of sample receipt:	2025-02-03			
Prüfmuster-Nr.: Test sample no.:	A003919647-002			
Prüfzeitraum: Testing period:	2025-02-17 - 2025-03-07			
Ort der Prüfung: Place of testing:	Wireless laboratory, Bangalore			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (India) Pvt.Ltd., 27/B, 2nd Cross, Electronic City Phase1 Bangalore -560 100, India FCC Test site registration number: 496599 ISED Test site registration number: 27711			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	genehmigt von: authorized by:			
Datum: Date: 2025-05-30	Ausstellungsdatum: Issue date: 2025-05-30			
Stellung / Position:	M.V.Naveen Kumar Senior Engineer	Stellung / Position:	Madhu K.N Assistant Manager	
Sonstiges / Other:	FCC ID: W68ARMOR-8000 IC: 8247A-ARMOR8000 HVIN: ARMOR8000			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 2 von 74

Page 2 of 74

- | | |
|---|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 3 von 74
Page 3 of 74

TEST SUMMARY

Test Item	FCC	ISED	Result
Maximum conducted (Peak) output power	15.247 (b)(3)	RSS 247 Issue 3 Section 5.4(d)	Pass
Maximum Power Spectral Density	FCC 15.247(e)	RSS 247 Issue 3 Section 5.2(b)	Pass
DTS Bandwidth & 99% Bandwidth	FCC 15.247(a)(2)	RSS 247 Issue 3 Section 5.2(a) RSS Gen Issue 5 Section 6.7	Pass
Emissions in non-restricted frequency bands	15.247 (d)	RSS 247 Issue 3 Section 5.5	Pass
Spurious Radiated Emissions and Restricted Bands of Operation	15.247 (d) / FCC 15.209 / FCC 15.205	RSS-Gen Issue 5, Section 8.9 /8.10	Pass
AC Power lines Conducted emission	FCC 15.207	RSS Gen Issue 5 Section 8.8	Pass
Antenna Requirement	FCC 15.203	RSS Gen Issue 5 Section 6.8	Complied

Product Category: Electronics Testing

Test Discipline: EMC Test Facility

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 4 von 74
Page 4 of 74

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
IN25JD8U 001	01	Initial issue of report	2025-05-30

Table of Contents

1	GENERAL REMARKS	6
1.1	Attachments	6
2	TEST SITES	7
2.1	Testing Facilities	7
2.2	List of Test and Measurement Instruments.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	Product Function and Intended Use	8
3.2	Ratings and System Details of Equipment under Test	8
3.3	Measurement Uncertainty:	9
4	TEST SET-UP AND OPERATION MODE.....	10
4.1	Principle of Configuration Selection	10
4.2	Test Operation and Test Software	10
4.3	Special Accessories and Auxiliary Equipment	10
4.4	Countermeasures to achieve EMC Compliance	10
4.5	List of frequencies	10
4.6	TUV Sample Identification.....	11
5	Operational Description	12
6	TEST METHODOLOGY	13
6.1	AC Power lines Conducted emission.....	13
6.1.1	Test Setup Configuration.....	13
6.2	Radiated Emission Test	14
6.2.1	Test Setup Configuration.....	14
7	TEST RESULTS	16
7.1	Maximum Peak Conducted Output Power	16
7.2	DTS Bandwidth & 99% Bandwidth.....	20
7.3	Power Spectral Density.....	27
7.4	Emissions in non-restricted frequency bands and Conducted Spurious Emission.....	31
7.4.1	Out-Of-Band Emissions.....	37
7.5	Spurious Radiated Emissions & Restricted Bands of Operation	49
7.6	AC Power lines Conducted Emission	71
8	LIST OF TABLES.....	74
9	List of Figures	74

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 6 von 74

Page 6 of 74

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1. Test Setup photos
2. EUT External Photos
3. EUT Internal Photos
4. FCC Label and Label Location
5. Block Diagram
6. Specification of EUT
7. Schematic Diagrams
8. Bill of Material
9. User Manual
10. Maximum Permissible Exposure Information

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 7 von 74
Page 7 of 74

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
27/B, 2nd Cross,
ElectronicCityPhase1
Bangalore – 560 100,
India
2. TUV Rheinland (India) Pvt.Ltd.,
108, Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100,
India

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
EMI Receiver	Rohde & Schwarz	ESW 44	101732	4.73 SP5	17.09.2025	Yearly	Radiated Spurious Emission
Active loop antenna	Frankonia	LAX-10	LAX-10-800	-	23-03-2025	Yearly	
Balun & Biconical Antenna	Schwarzbeck mess-elektronik	BBA 9106+VH BB 9124	9124-1117	-	03.06.2025	Yearly	
Log-Periodic Antenna	Schwarzbeck mess-elektronik	VUSLP 9111B	9111B-324	-	31.05.2025	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-01944	-	12.11.2025	Yearly	
Broadband Antenna	Frankonia	ALX-4000	ALX-4000-806	-	30.05.2025	Yearly	
EMI Test Receiver	Rohde & Schwarz	ESW44	101773	1.72.SP1	26.01.2026	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	Conducted Test Parameters
Spectrum Analyzer	Agilent	E4407B	US411927 72	A.14.07	16-01-2026	Yearly	
10 dB RF Attenuator (DUT-1)	Rohde & Schwarz	-	-	-	15-10-2025	Yearly	Conducted AC Power line Test
EMI Receiver	Rohde & Schwarz	ESR7	101133	3.48 SP3	16.09.2025	Yearly	
Two Line LISN	Scientific	SMLIN6 3-2	161101	-	06.03.2026	Yearly	
Pulse limiter [0 - 30 MHz]	Rohde & Schwarz	ESH3-Z2	100811	-	08-07-2025	Yearly	

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in FAC	EMC 32	10.60.20
2	Radiated spurious emission measurement in 10mtr SAC	BAT EMC	3.20.0.17

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 8 von 74
Page 8 of 74

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

Designed to monitor/collect the telemetry data (Inlet, Outlet, Pilot pressure & Displacement) of the Gas Regulator. This telemetry data will be logged into the local Memory and either transfer to the Cloud via 4G LTE CAT M1 wireless communication or to the SCADA system through the Ethernet Communication.

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client*

Radio Protocol		Bluetooth Low Energy
Operating Frequency Range		2402MHz to 2480MHz
No. of Channels		40
Channel Spacing		2MHz
Transmitter Power level(dBm)		5dBm
Measured Peak power (dBm)		0.37dBm@2440MHz_2Mbps
Modulation		GFSK
Data Rates		1Mbps,2Mbps
Number of antennas		1
Antenna Gain		3.3dBi
Antenna Type		PCB Antenna
Supply Voltage to Product		24VDC through AC-DC Adapter
Environmental conditions	Storage(°C)	-40°C to +70°C
	Operating(°C)	-40°C to +70°C
EUT Dimension(L x W x H) in inches		10.2"*5.7"*4" in inches

***Disclaimer:** The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 9 von 74

Page 9 of 74

3.3 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$

Table 4: Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	± 0.67 dB
Power Spectral Density, conducted	± 0.85 dB
Unwanted Emissions, conducted	± 2.58 dB
All emissions, radiated	± 3.67 dB

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle transmission on low, mid and high channel.

4.2 Test Operation and Test Software

Hardware Name: ARMOR8000

Software Version:2.0

BLE Test Firmware: Rev_143

4.3 Special Accessories and Auxiliary Equipment

- None

4.4 Countermeasures to achieve EMC Compliance

- None

4.5 List of frequencies

Frequency Band (MHz)	Channel No.	Channel Frequency (MHz)
2402 – 2483.5 BLE	0	2402
	1	2404
	2	2406
	3	2408
	:	:
	11	2424
	12	2426
	:	:
	19	2440
	20	2442
	:	:
	:	:
	:	:
	:	:
	36	2474
	37	2476
	38	2478
	39	2480

Table 5: List of BLE Centre frequencies

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 11 von 74

Page 11 of 74

Channel used for BLE testing.

Channel low: 2402MHz

Channel mid: 2440MHz

Channel high : 2480MHz

4.6 TUV Sample Identification

1. TUV Sample Identification number: A003919647-002 – Radiated & Conducted test Sample.

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 12 von 74

Page 12 of 74

5 Operational Description

The Fisher™ ARMOR 8000 Series is a remote monitoring device that is configurable to serve as a regulator monitoring solution or a station monitoring solution. The ARMOR device offers flexible measurement options, including 1, 2 or 3 pressure points, remote travel monitoring and discrete monitoring. It communicates through various channels, such as MQTT/Sparkplug B, cellular connectivity with DeltaV SaaS, Ethernet connectivity and low-energy Bluetooth® Technology with a dedicated application.


6 TEST METHODOLOGY

6.1 AC Power lines Conducted emission

Measured levels of ac powerline conducted emission across the 50Ω LISN port (to which the EUT is connected). All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer.

The device is placed on the test table, raised 80cm above the reference ground plane. The vertical conducting plane is located 40cm to the rear of the device. AC Conducted emission measurement is made over frequency range from 150 kHz to 30MHz, this measurement was performed an AC adaptor 110V AC 60Hz supply

6.1.1 Test Setup Configuration

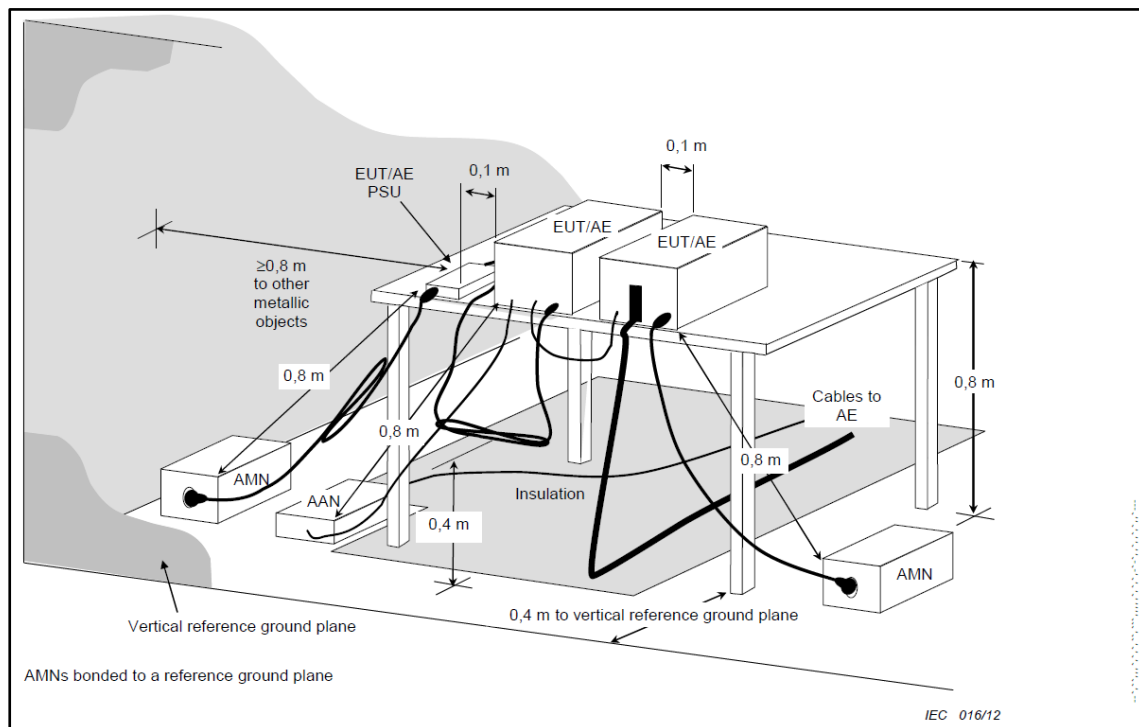

6.2 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, the measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Balloon and Biconical Antenna, and measurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded

6.2.1 Test Setup Configuration

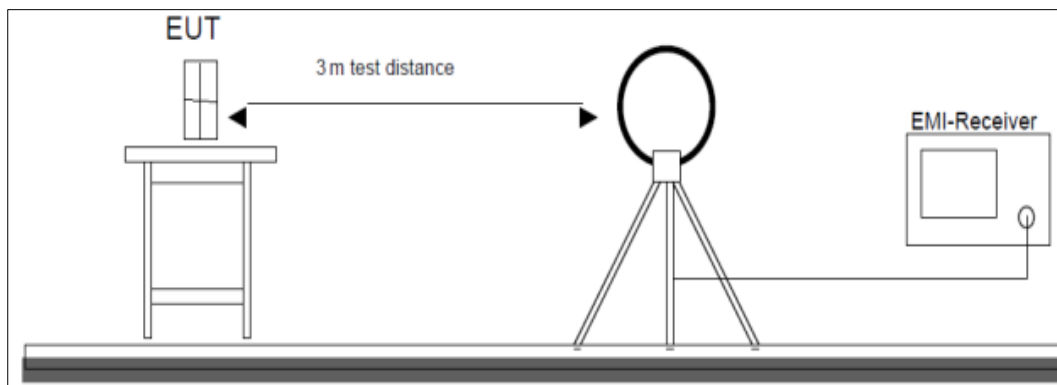


Figure 1: Frequency Range 9 kHz- 30 MHz

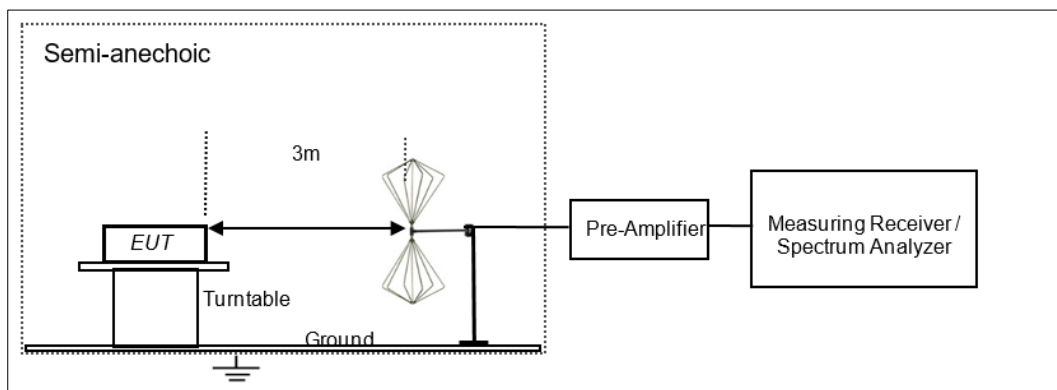


Figure 2: Frequency Range 30 MHz – 200 MHz

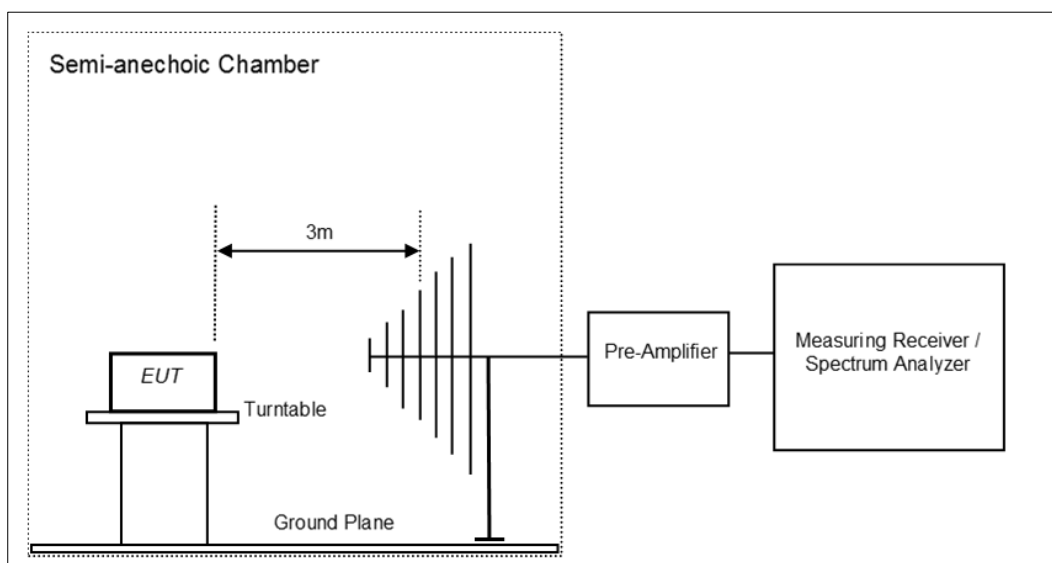


Figure 3: Frequency Range 200 MHz - 1GHz

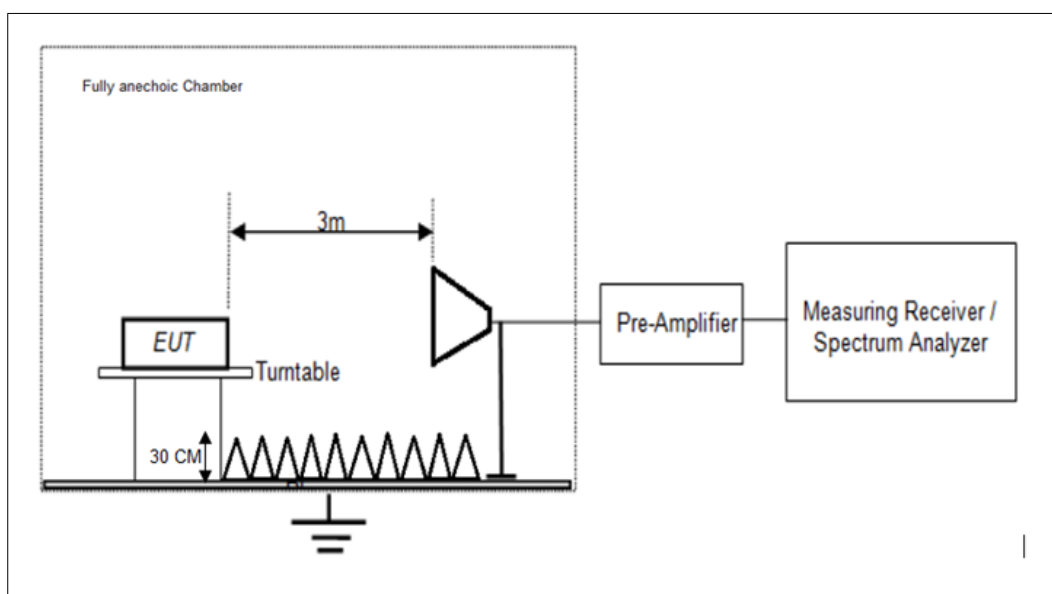


Figure 4: Frequency Range above 1 GHz

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 16 von 74

Page 16 of 74

7 TEST RESULTS

7.1 Maximum Peak Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3)/ RSS 247 Issue 3 5.4 (d)
Test Method	Subclause 11.9.1.1 of ANSI C63.10
Measurement Bandwidth	1MHz
Detector	Peak
Port of testing	Conducted mode
Requirement	Power ≤ 1 W (30 dBm) & e.i.r.p ≤ 4 W (36dBm)

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C

Voltage = 24VDC through AC-DC Adapter

Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.3.1.1 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 17 von 74

Page 17 of 74


Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Cable loss (1dB)
3. This product do not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 3.3 dBi


Data rate	Channel frequency	Measured power (dBm)	Measured e.i.r.p (dBm)	FCC/ISED Power Limit (dBm)	ISED e.i.r.p limit (dBm)
125 Kbps	2402.00	-0.69	2.61	30.00	36.00
	2440.00	0.20	3.50	30.00	36.00
	2480.00	-1.92	1.38	30.00	36.00
500 Kbps	2402.00	-0.65	2.65	30.00	36.00
	2440.00	0.15	3.45	30.00	36.00
	2480.00	-1.91	1.39	30.00	36.00
1 Mbps	2402.00	-0.65	2.65	30.00	36.00
	2440.00	0.15	3.45	30.00	36.00
	2480.00	-1.93	1.37	30.00	36.00
2 Mbps	2402.00	-0.42	2.88	30.00	36.00
	2440.00	0.37	3.67	30.00	36.00
	2480.00	-1.85	1.45	30.00	36.00

Test Plots:

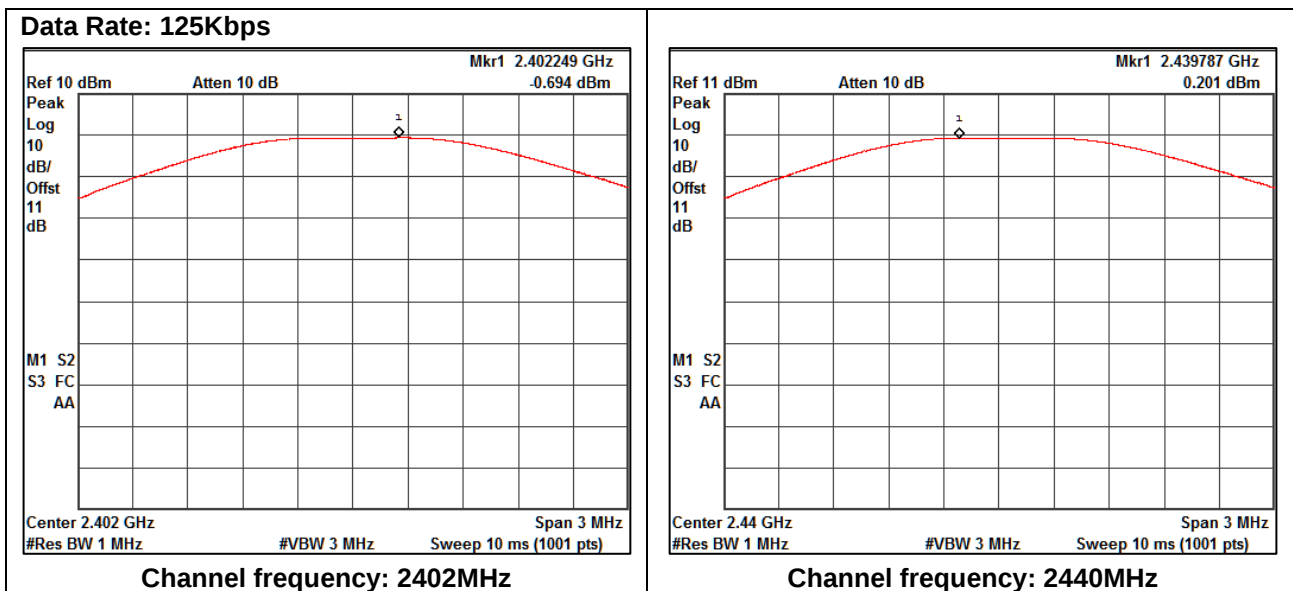


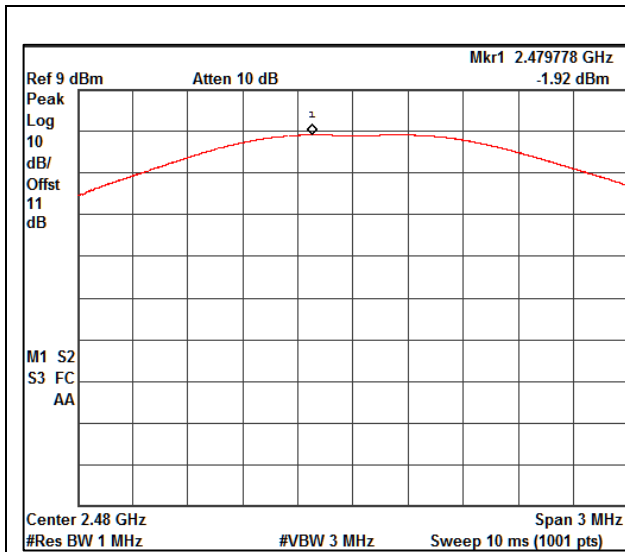


Channel frequency: 2480MHz

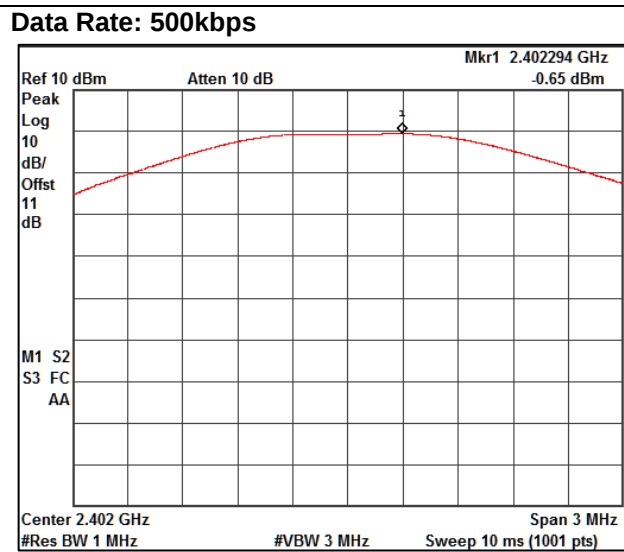

Channel frequency: 2402MHz

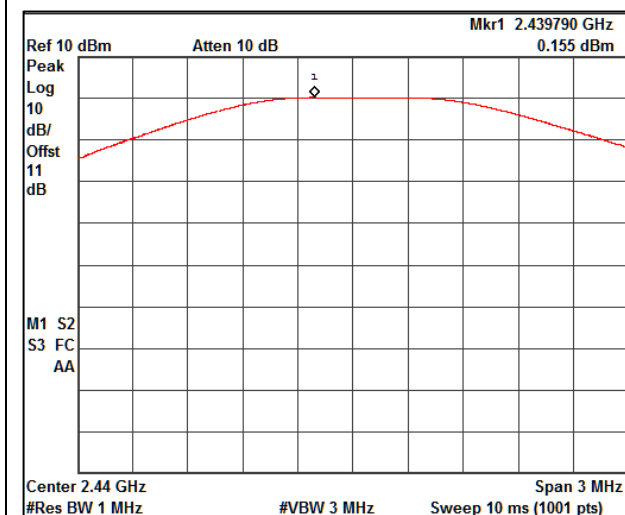


Channel frequency: 2440MHz

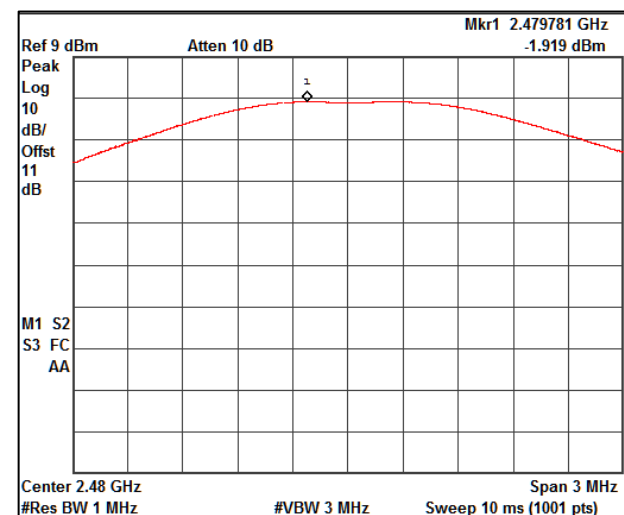


Channel frequency: 2480MHz


Data Rate: 1Mbps

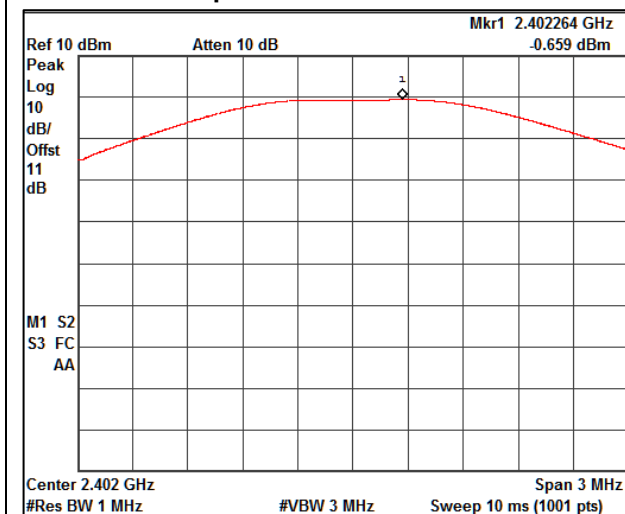

Channel frequency: 2402MHz

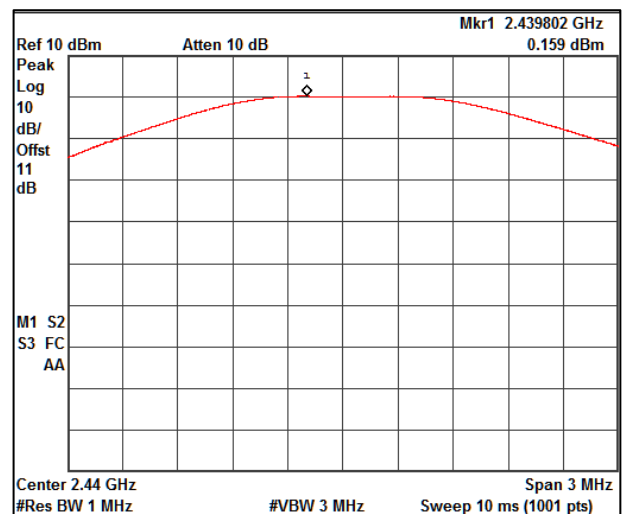

Channel frequency: 2440MHz

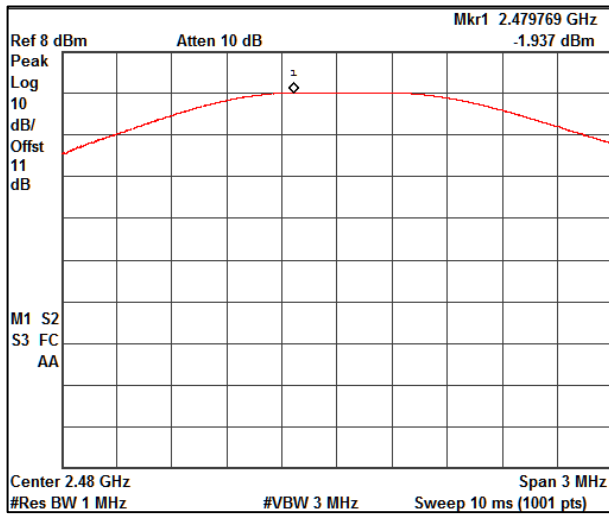


Channel frequency: 2480MHz

Data Rate: 2Mbps



Channel frequency: 2402MHz

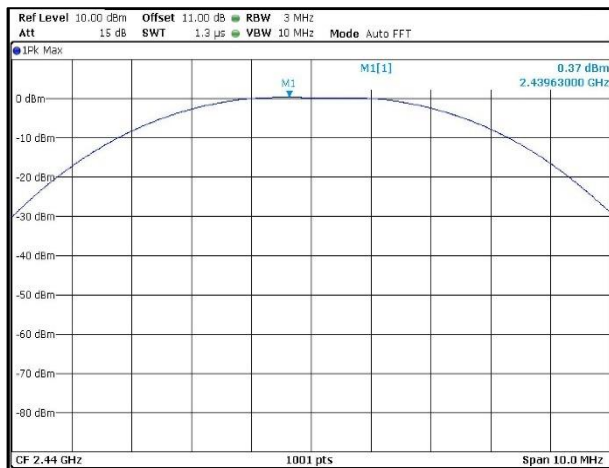

Channel frequency: 2440MHz



Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 20 von 74
Page 20 of 74

7.2 DTS Bandwidth & 99% Bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2)/ RSS 247 Issue 3 Section 5.2(a)/ RSS Gen Issue 5 Section 6.7
Test Method	Subclause 11.8.1 of ANSI C63.10 for DTS Subclause 6.9.3 of ANSI C63.10 for OBW
Measurement Bandwidth	100 kHz for DTS Bandwidth 1% to 5% of OBW
Detector	Peak
Port of testing	Conducted mode
Requirement	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Condition

Normal Test Condition:

Temperature (Norm) = +22.1°C Voltage = 24VDC through AC-DC Adapter Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 21 von 74
Page 21 of 74

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. This product do not support additional beamforming gain / directional gain, it uses single antenna and hence directional gain of the single antenna is 3.3 dBi.

Data rate	Channel frequency	99% (MHz)	6dB BW (MHz)	Limit (MHz)
125 Kbps	2402.00	1.10	0.754	0.50
	2440.00	1.09	0.764	0.50
	2480.00	1.08	0.730	0.50
500 Kbps	2402.00	1.08	0.738	0.50
	2440.00	1.09	0.732	0.50
	2480.00	1.06	0.714	0.50
1 Mbps	2402.00	1.07	0.729	0.50
	2440.00	1.08	0.757	0.50
	2480.00	1.08	0.735	0.50
2 Mbps	2402.00	2.07	1.32	0.50
	2440.00	2.07	1.41	0.50
	2480.00	2.05	1.34	0.50

Test Plots:

DTS Bandwidth:

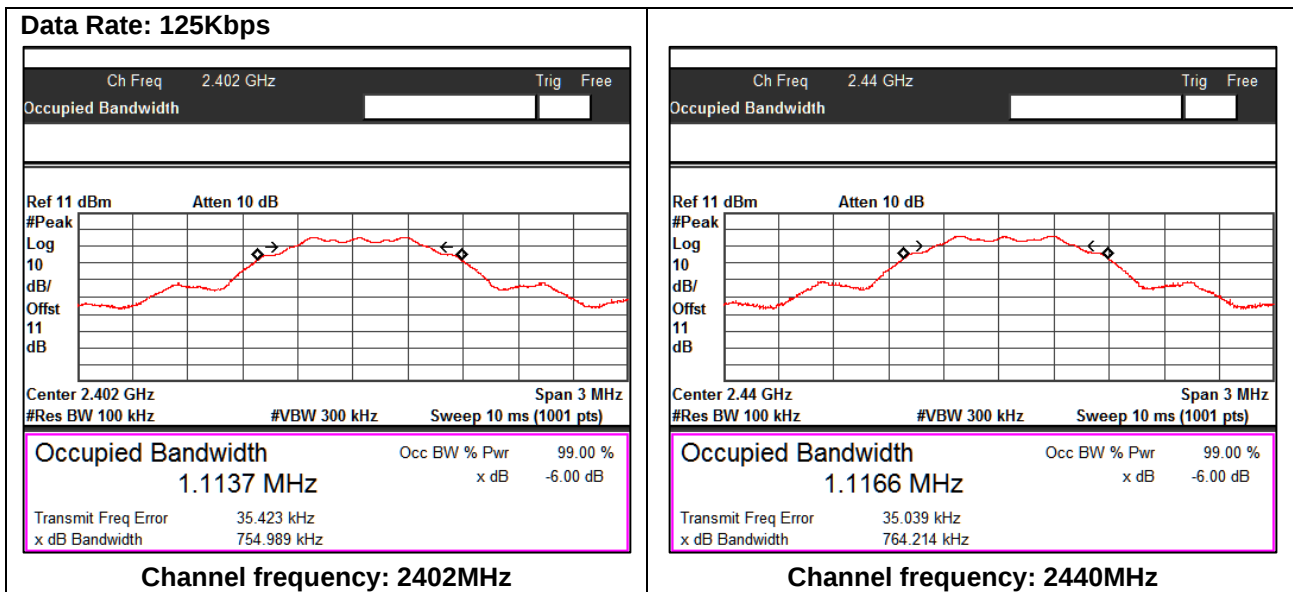


Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 22 von 74
Page 22 of 74


Data Rate: 500kbps

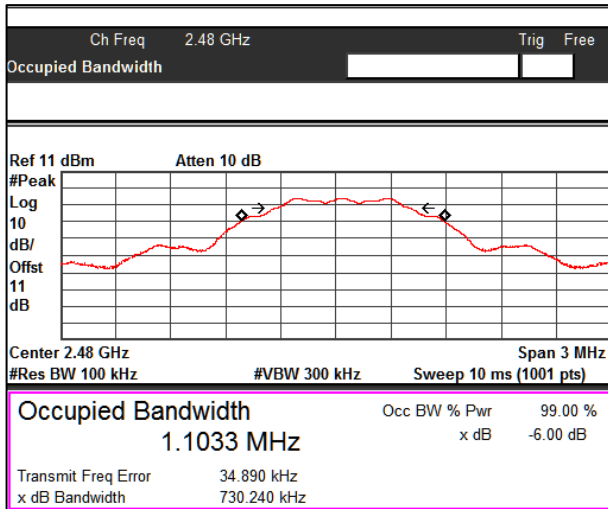


Channel frequency: 2480MHz

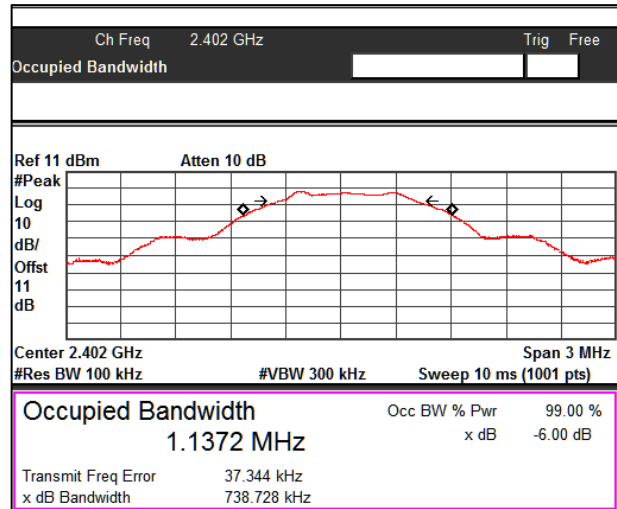

Channel frequency: 2402MHz

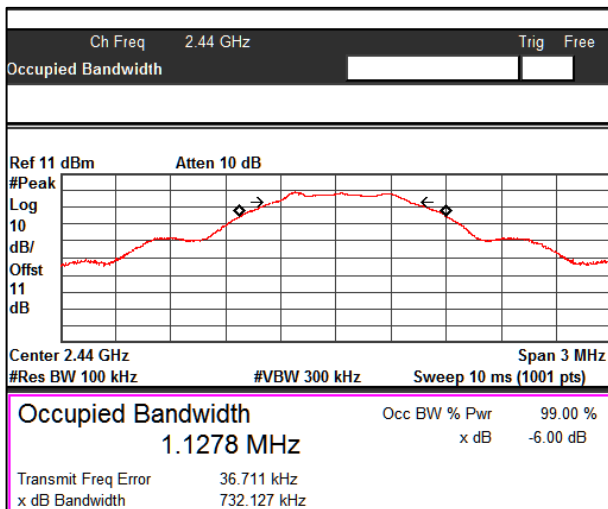


Channel frequency: 2440MHz

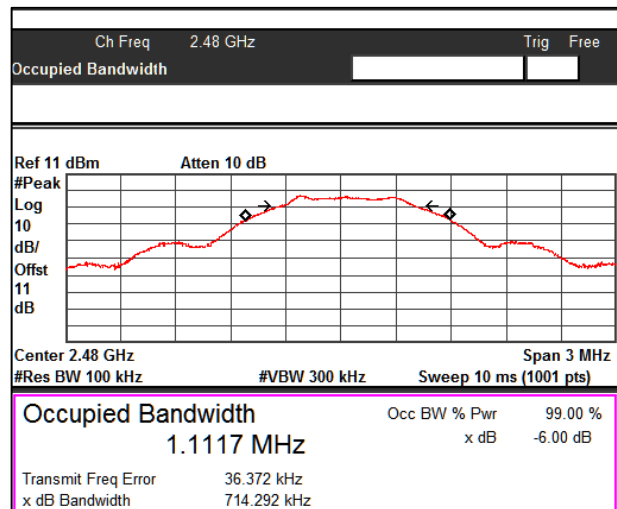


Channel frequency: 2480MHz

Data Rate: 1Mbps

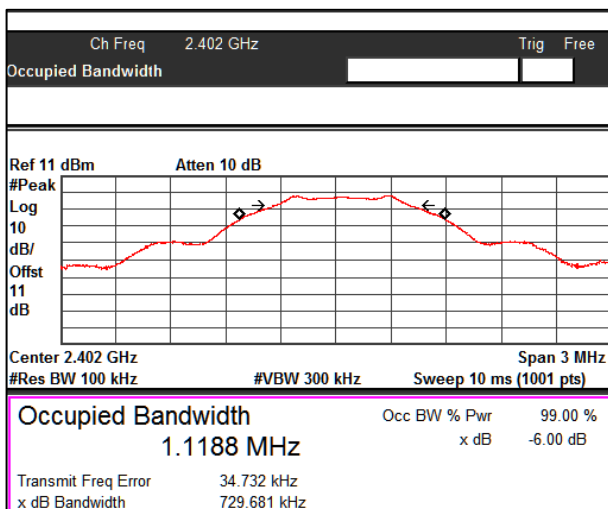


Channel frequency: 2402MHz

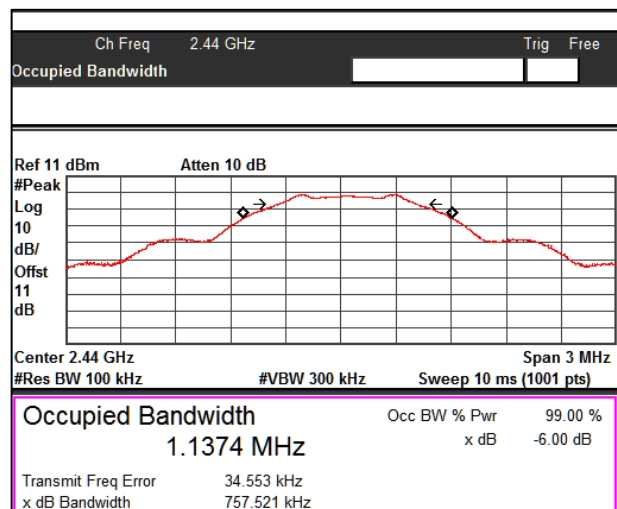


Channel frequency: 2440MHz


Data Rate: 2Mbps

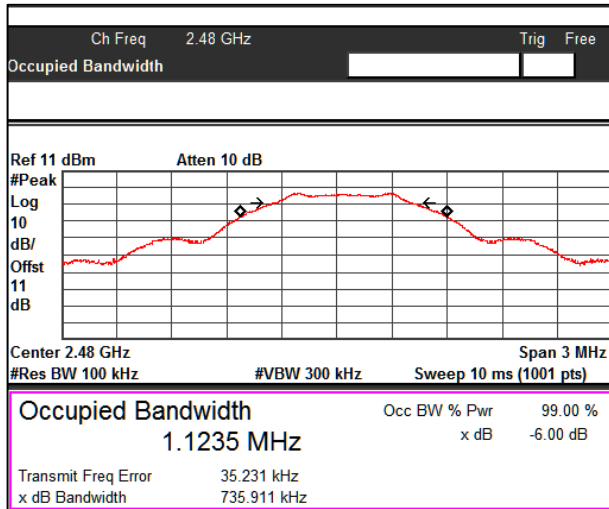


Channel frequency: 2480MHz

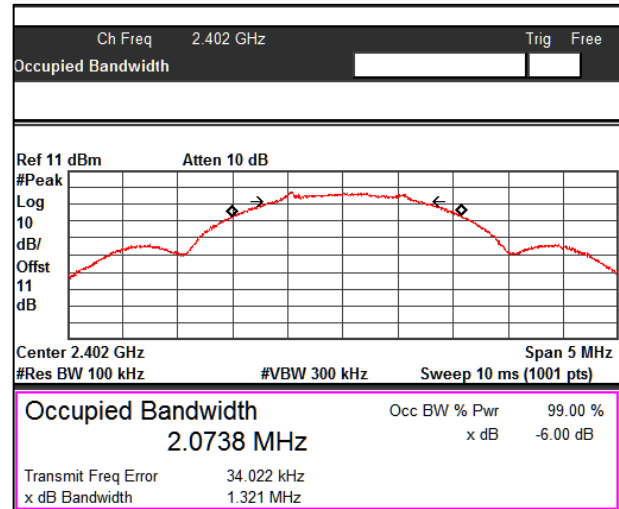

Channel frequency: 2402MHz

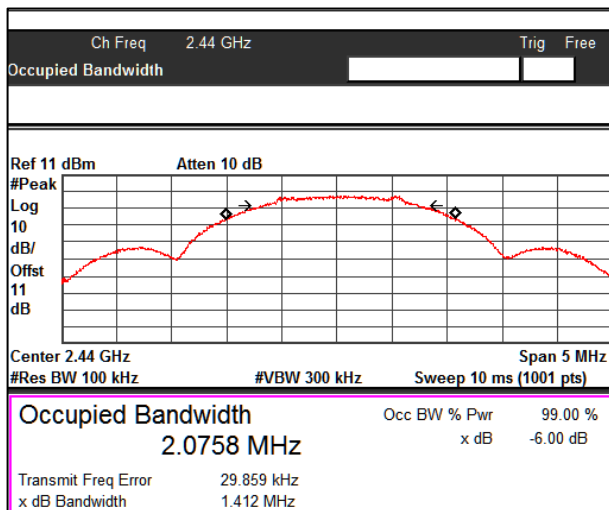


Channel frequency: 2440MHz

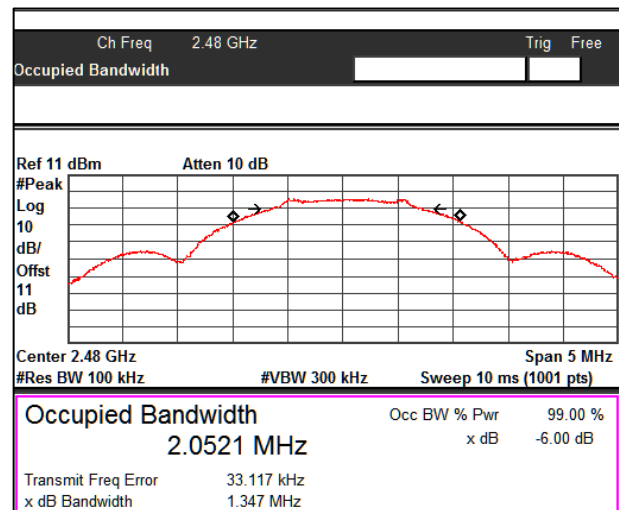


Channel frequency: 2480MHz

99% Bandwidth:


Data Rate: 125Kbps

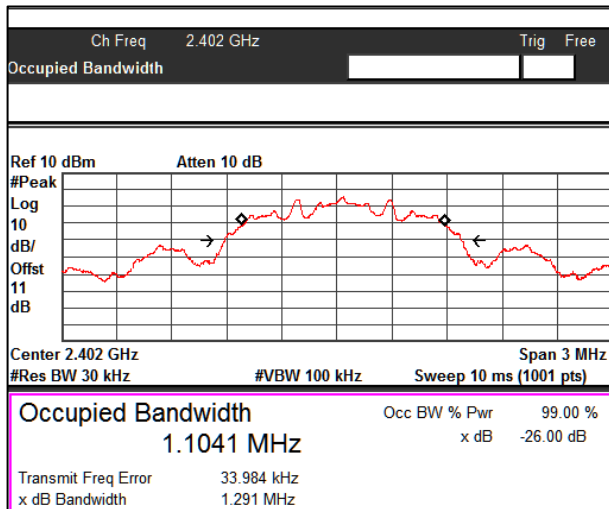

Channel frequency: 2402MHz

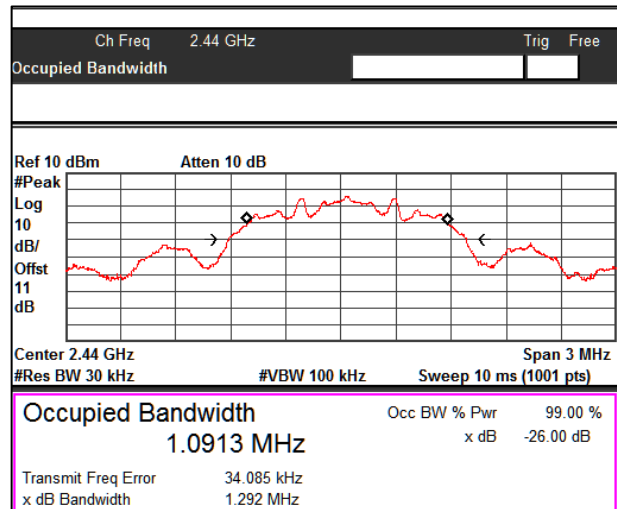


Channel frequency: 2440MHz

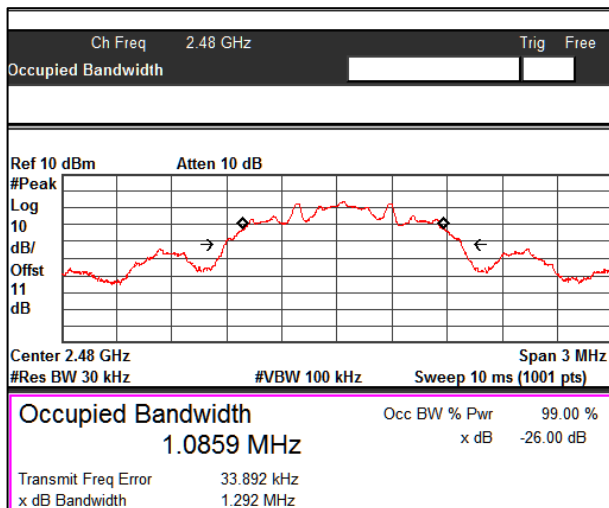


Channel frequency: 2480MHz


Data Rate: 500kbps

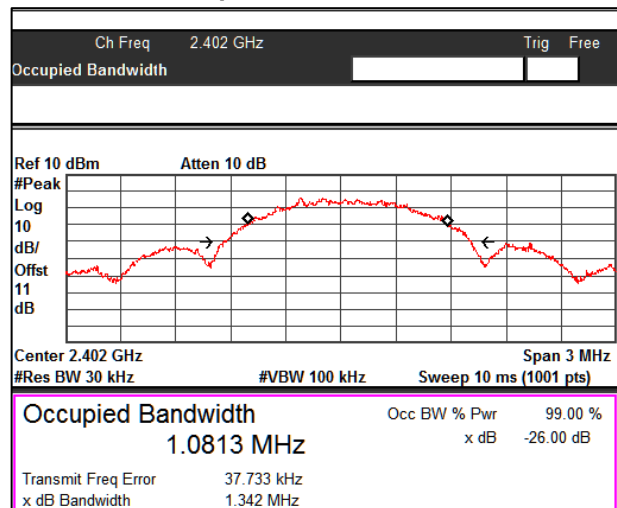

Channel frequency: 2402MHz

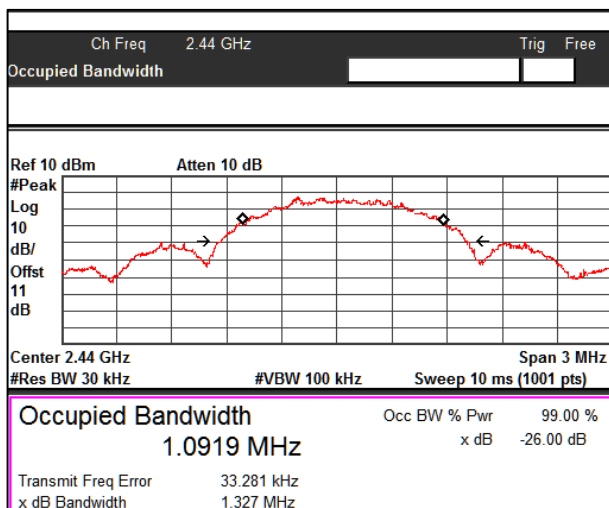

Channel frequency: 2440MHz

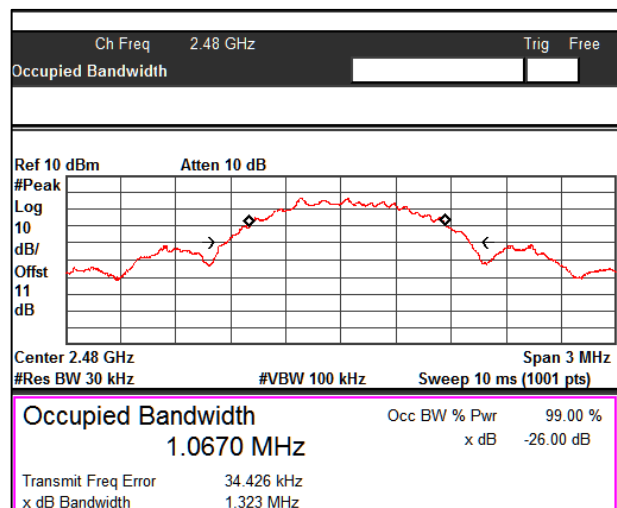


Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 25 von 74
Page 25 of 74


Data Rate: 1Mbps

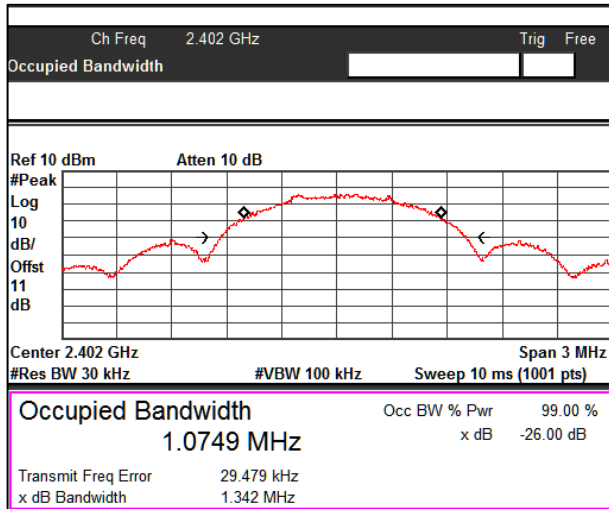

Channel frequency: 2402MHz

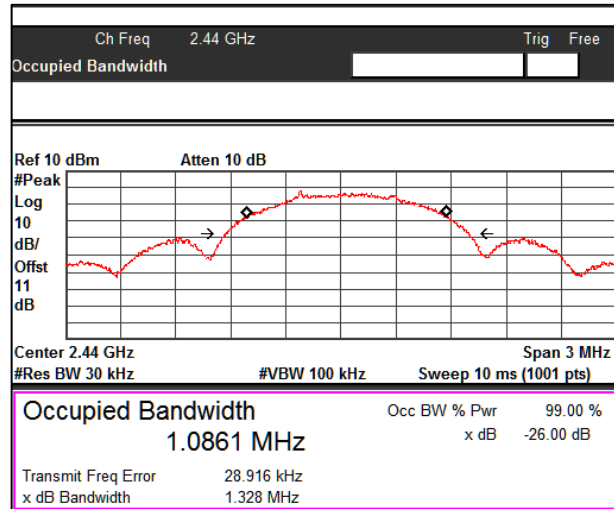

Channel frequency: 2440MHz

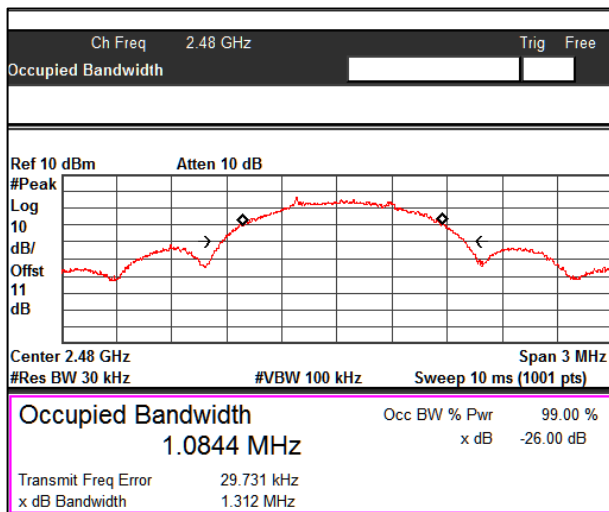


Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 26 von 74
Page 26 of 74


Data Rate: 2Mbps

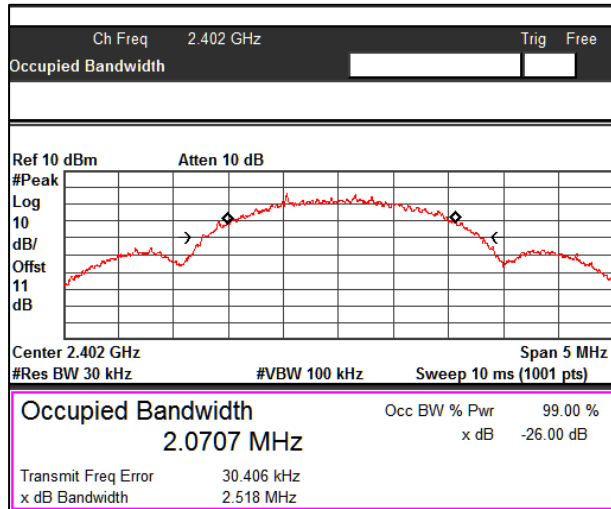

Channel frequency: 2402MHz

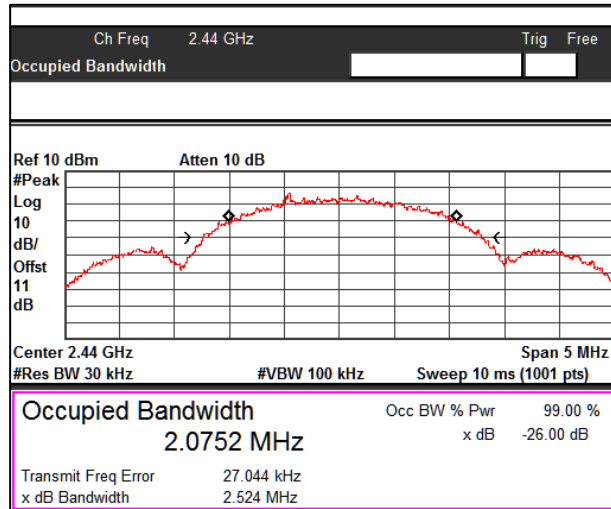

Channel frequency: 2440MHz

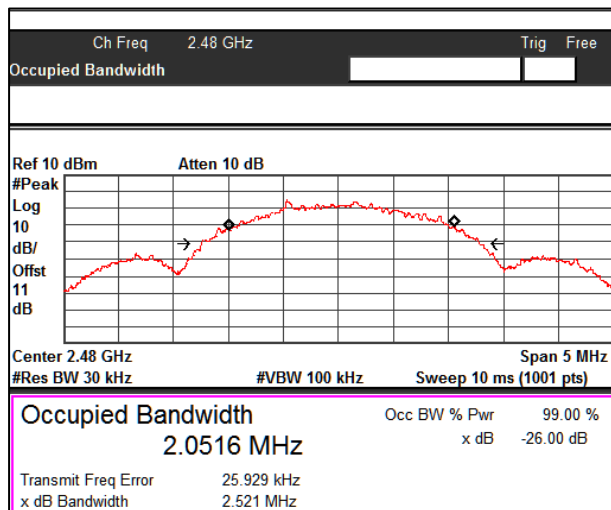

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 27 von 74
Page 27 of 74

7.3 Power Spectral Density

Result

Pass

Test Specification	FCC Part 15 Subpart C Section 15.247 (e)/ RSS 247 Issue 3 Section 5.2(b)
Test Method	Subclause 11.10.2 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Conducted mode
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 100 kHz band during any time interval of continuous transmission.

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8 °C Voltage = 24VDC through AC-DC Adapter Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 28 von 74
Page 28 of 74





Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report.



Data rate	Channel Frequency (MHz)	Measured PSD (dBm)	Limit (dBm)
125 Kbps	2402.00	-3.75	8.00
	2440.00	-2.96	8.00
	2480.00	-5.07	8.00
500 Kbps	2402.00	-0.76	8.00
	2440.00	0.07	8.00
	2480.00	-1.96	8.00
1 Mbps	2402.00	-0.98	8.00
	2440.00	0.12	8.00
	2480.00	-2.00	8.00
2 Mbps	2402.00	-1.59	8.00
	2440.00	-0.72	8.00
	2480.00	-2.84	8.00


Test Plots:

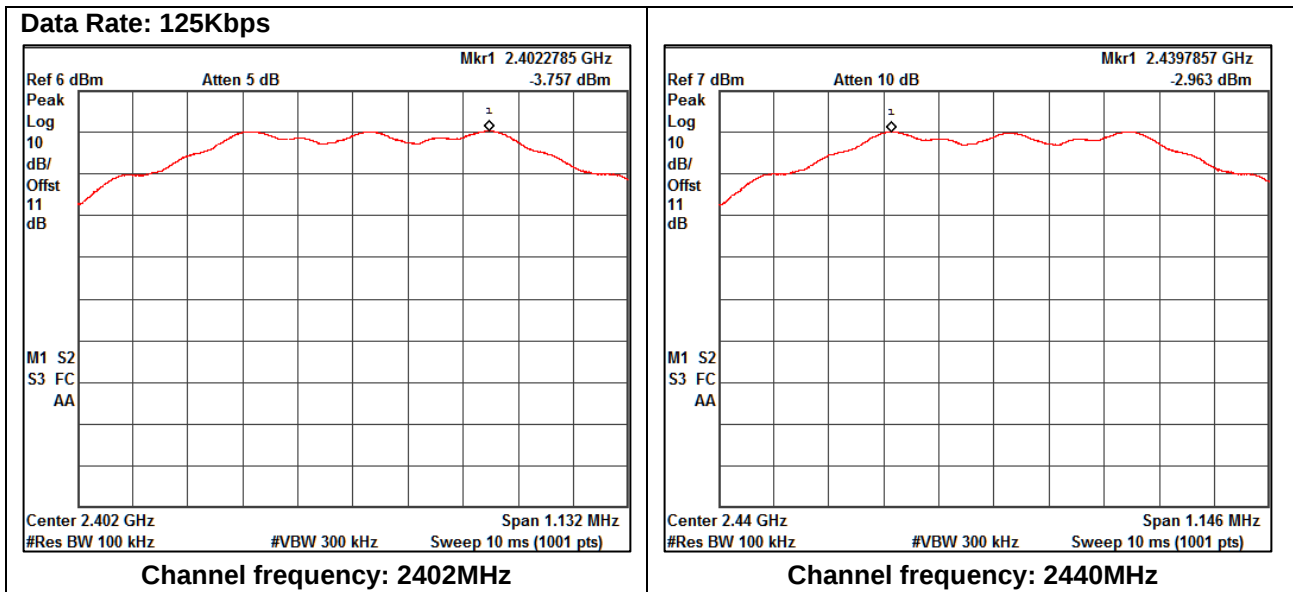

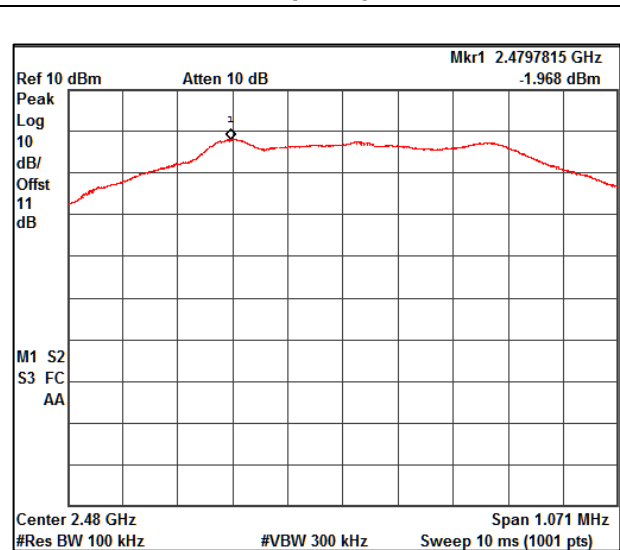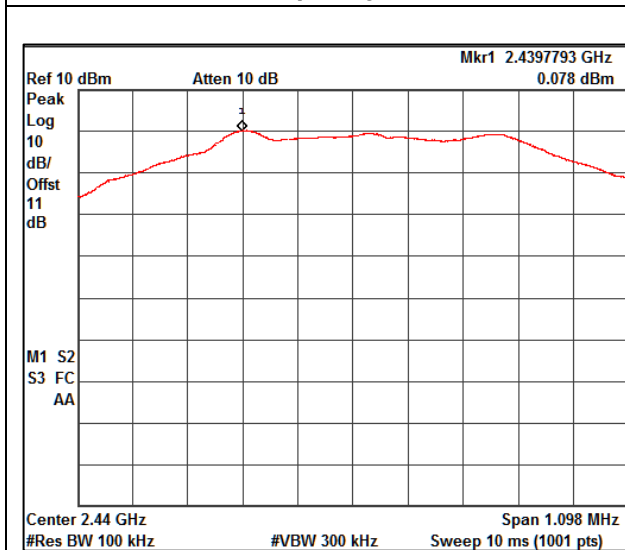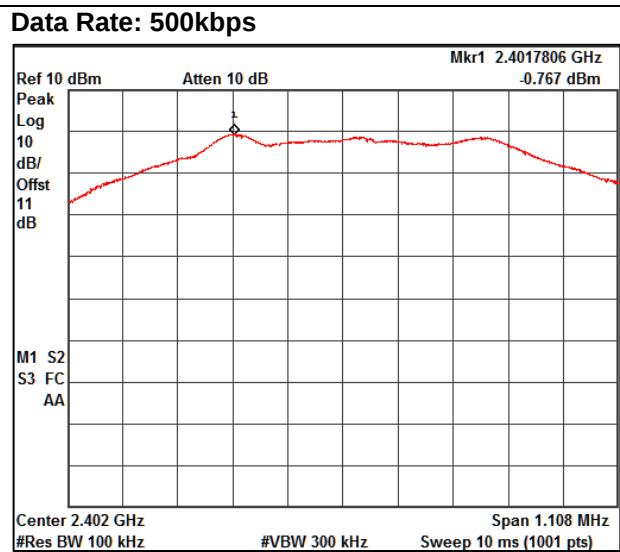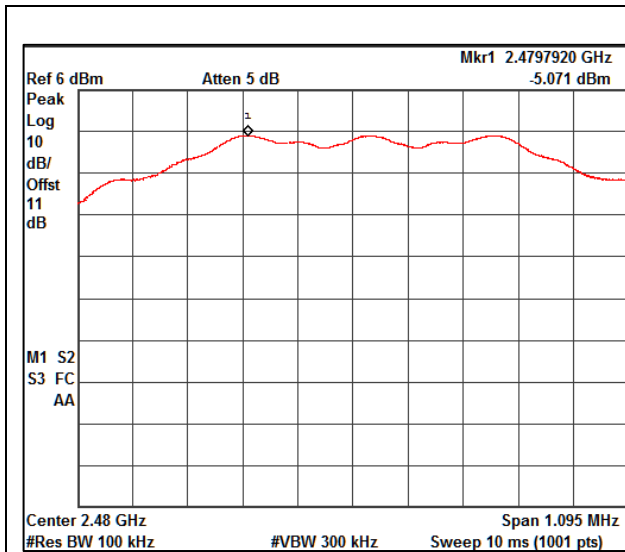


Data Rate: 1Mbps

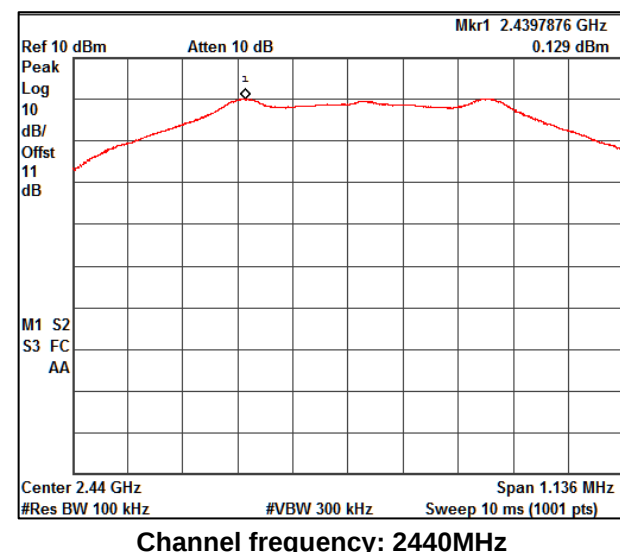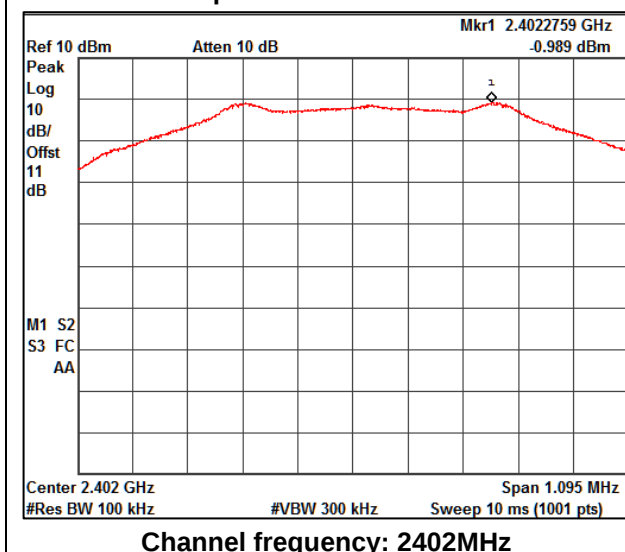


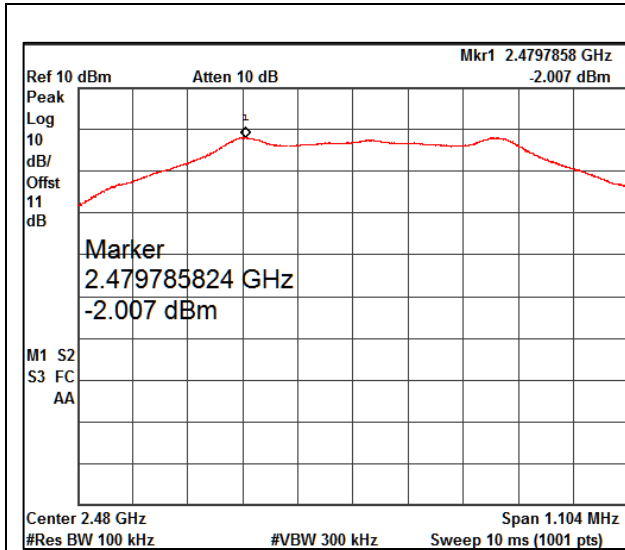


Channel frequency: 2480MHz

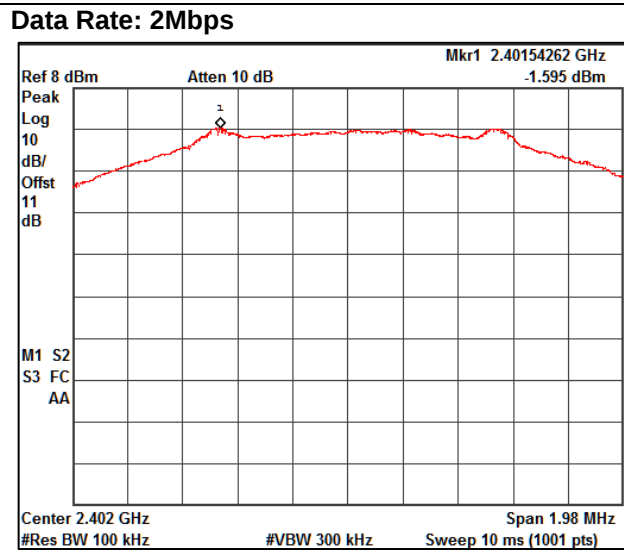

Channel frequency: 2402MHz

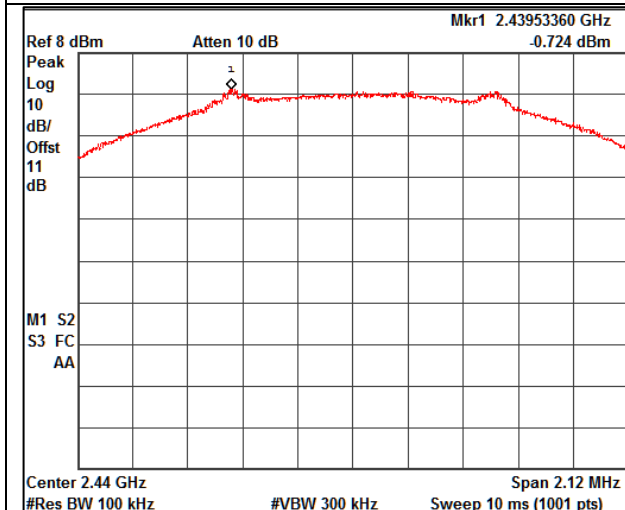

Channel frequency: 2440MHz

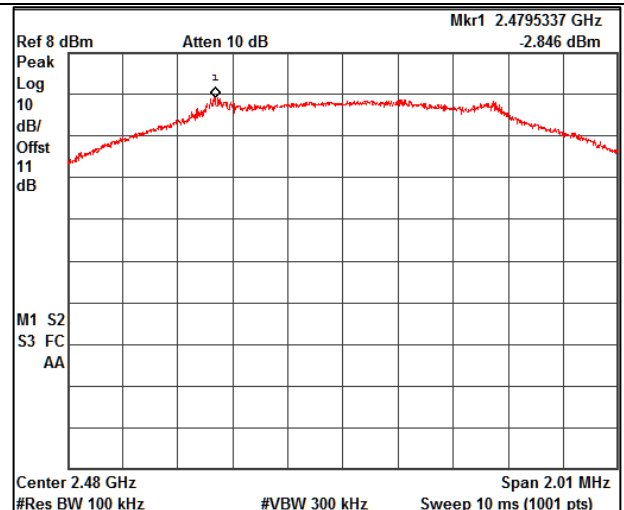

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 31 von 74
Page 31 of 74

7.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d)/ RSS 247 Issue 3 Section 5.5
Test Method	Subclause 11.11.3 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Conducted mode
Requirement	In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB

Test Condition

Normal Test Condition:

Temperature (Norm) = +23.8°C Voltage = 24VDC through AC-DC Adapter Relative humidity: 50%

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 32 von 74
Page 32 of 74


Test results:


Note: All the losses are included during measurement and final values are mentioned in the test report

Band edge


Data rate	Channel Frequency (MHz)	Band edge frequency (MHz)	Value at band edge (A) (dBm)	Reference value (B) (dBm)	A-B (dBc)	Minimum Limit (dBc)
125 Kbps	2402.00	2400.00	-48.52	-3.75	-44.77	-20.00
	2480.00	2483.50	-61.35	-5.07	-56.28	-20.00
500 Kbps	2402.00	2400.00	-47.22	-0.76	-46.46	-20.00
	2480.00	2483.50	-57.82	-1.96	-55.86	-20.00
1 Mbps	2402.00	2400.00	-48.62	-0.98	-47.64	-20.00
	2480.00	2483.50	-58.45	-2.00	-56.45	-20.00
2 Mbps	2402.00	2400.00	-34.83	-1.59	-33.24	-20.00
	2480.00	2483.50	-57.31	-2.84	-54.47	-20.00

Reference Plots:

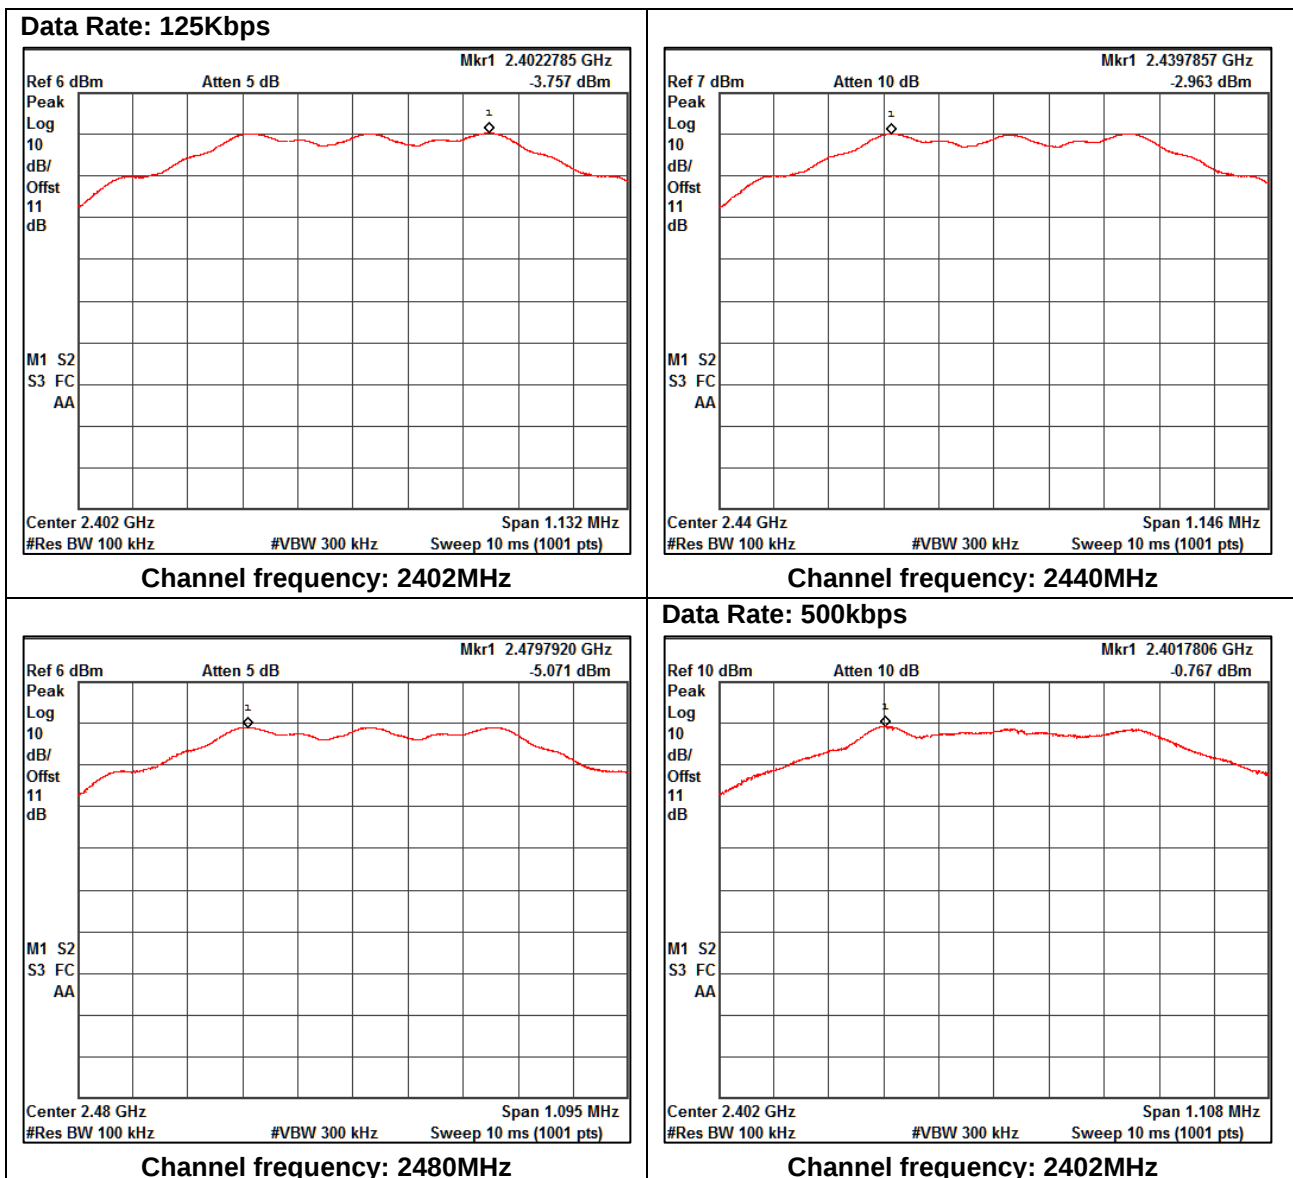

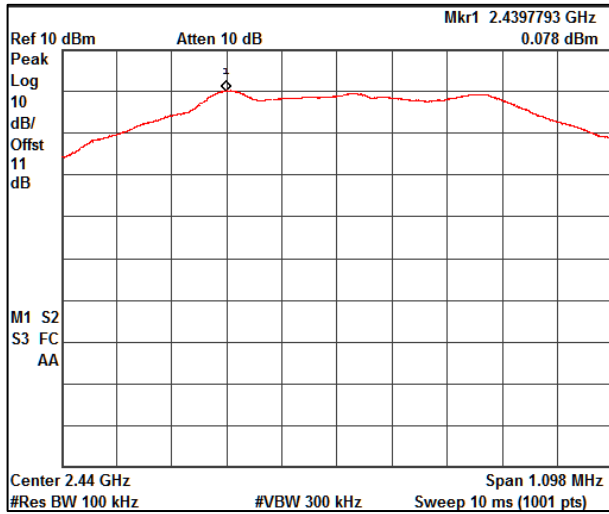


Channel frequency: 2440MHz

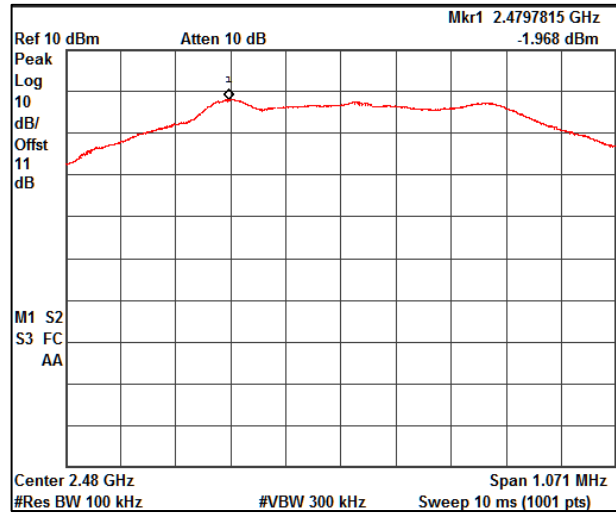


Channel frequency: 2480MHz


Data Rate: 1Mbps

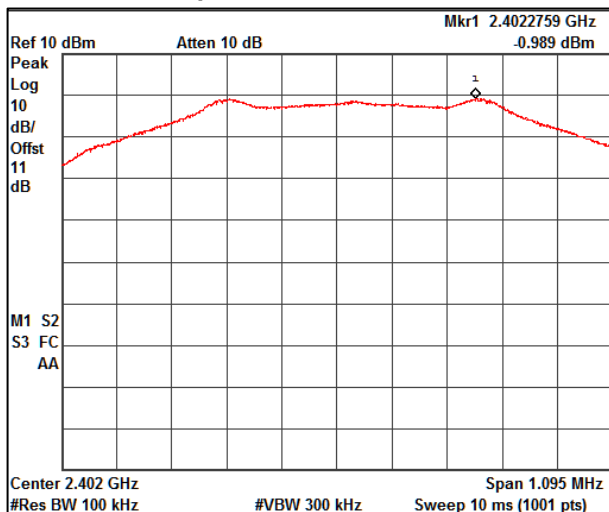


Channel frequency: 2402MHz

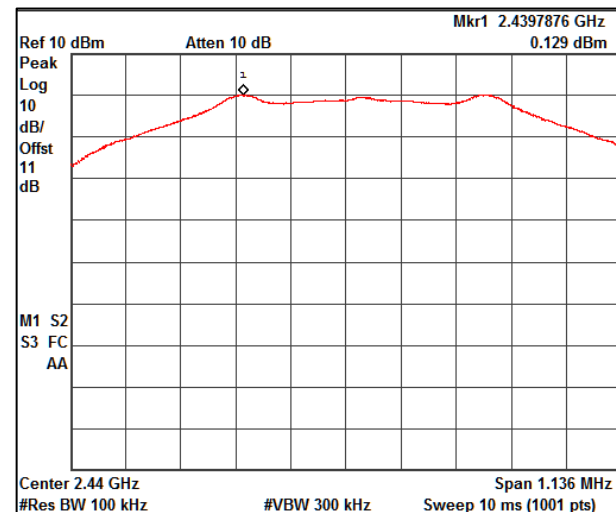


Channel frequency: 2440MHz

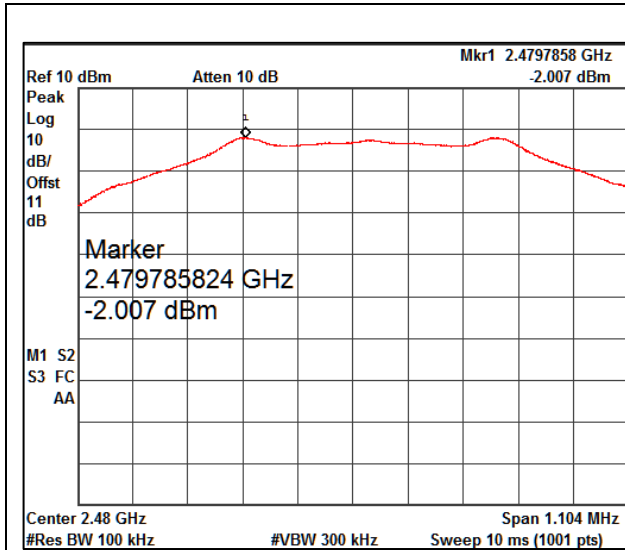


Channel frequency: 2480MHz

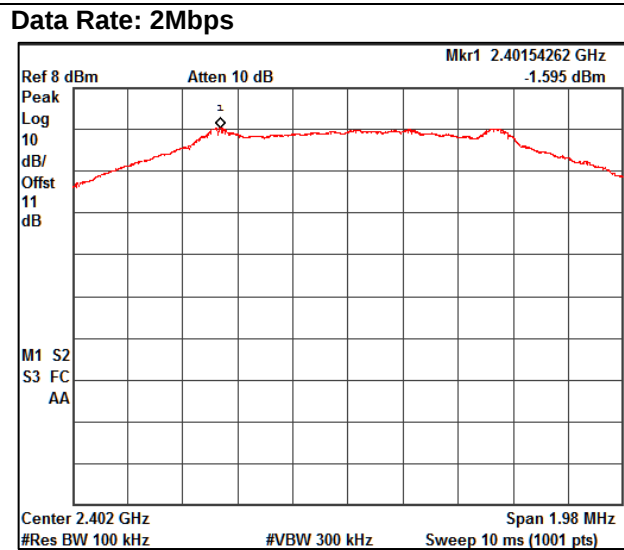

Channel frequency: 2402MHz

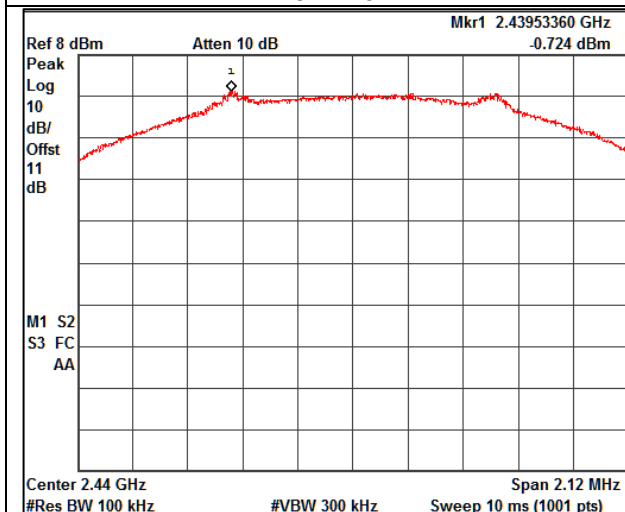


Channel frequency: 2440MHz

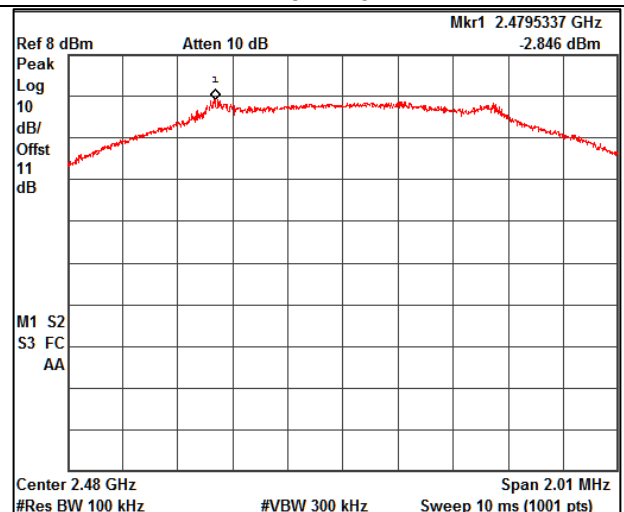


Channel frequency: 2480MHz

Bandedge Plots:

Data Rate: 125Kbps

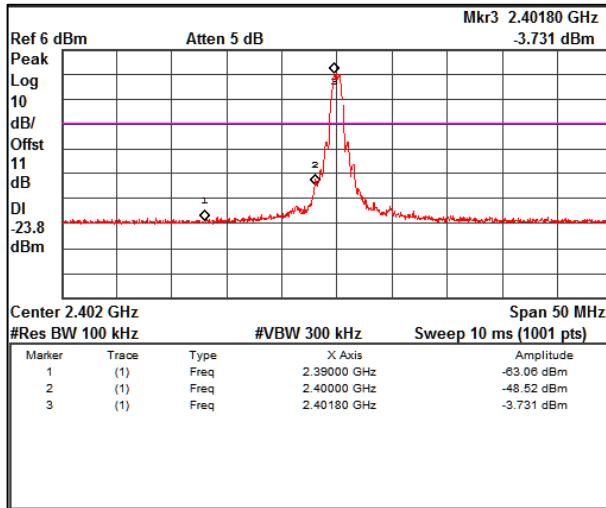


Channel frequency: 2402MHz

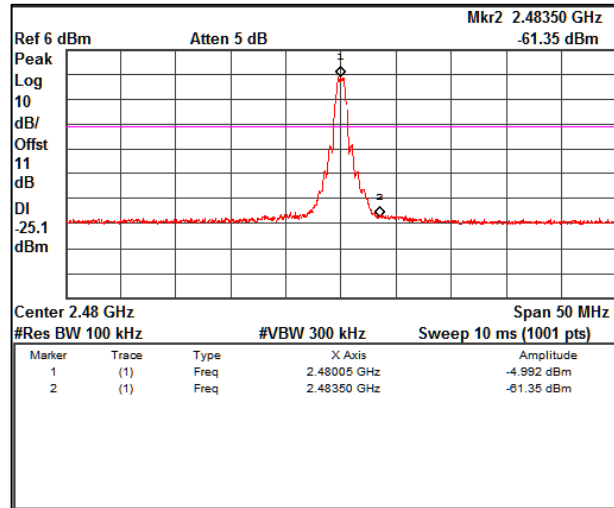


Channel frequency: 2480MHz

Data Rate: 500kbps

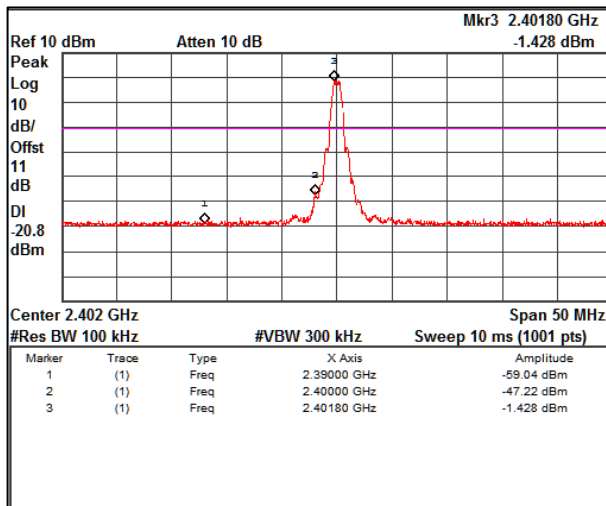


Channel frequency: 2402MHz

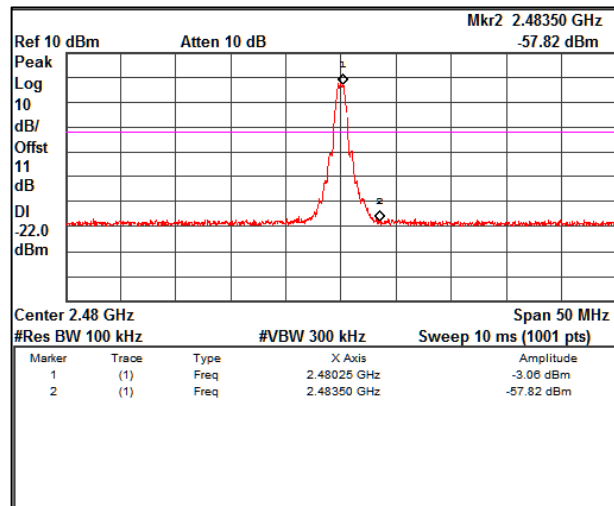


Channel frequency: 2480MHz


Data Rate: 1Mbps

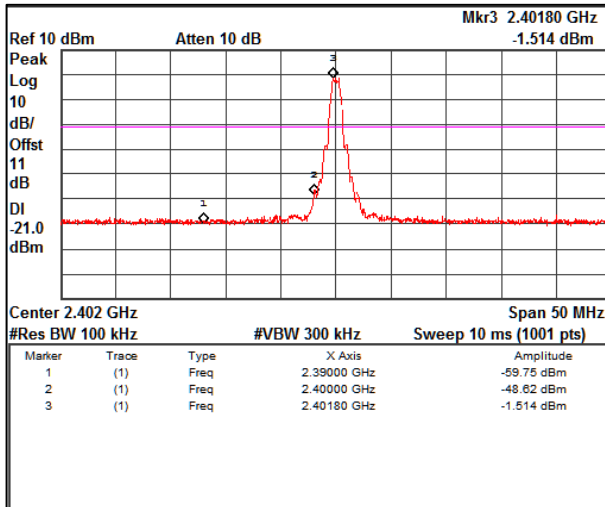


Channel frequency: 2402MHz

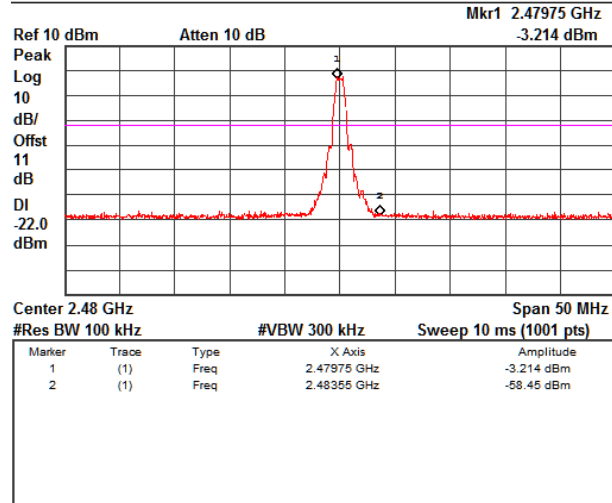

Channel frequency: 2480MHz

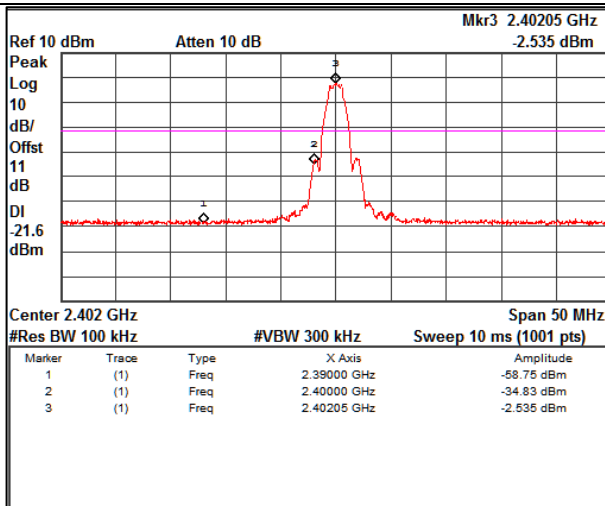

Channel frequency: 2402MHz

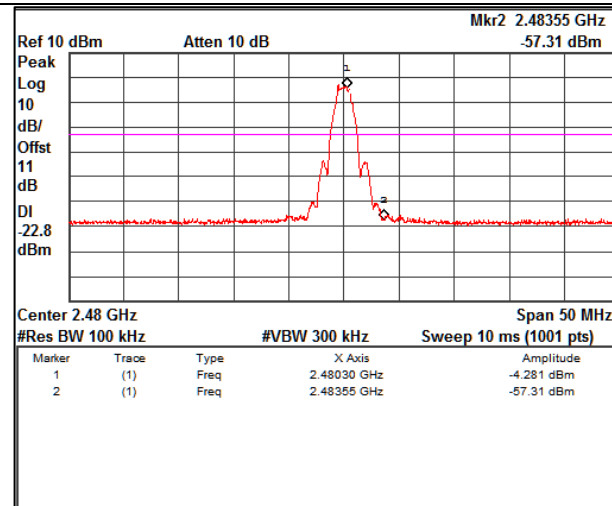

Channel frequency: 2480MHz

Prüfbericht - Nr.:

Test Report No.:


IN25JD8U 001

Seite 37 von 74

Page 37 of 74


7.4.1 Out-Of-Band Emissions

Data Rate: 125Kbps

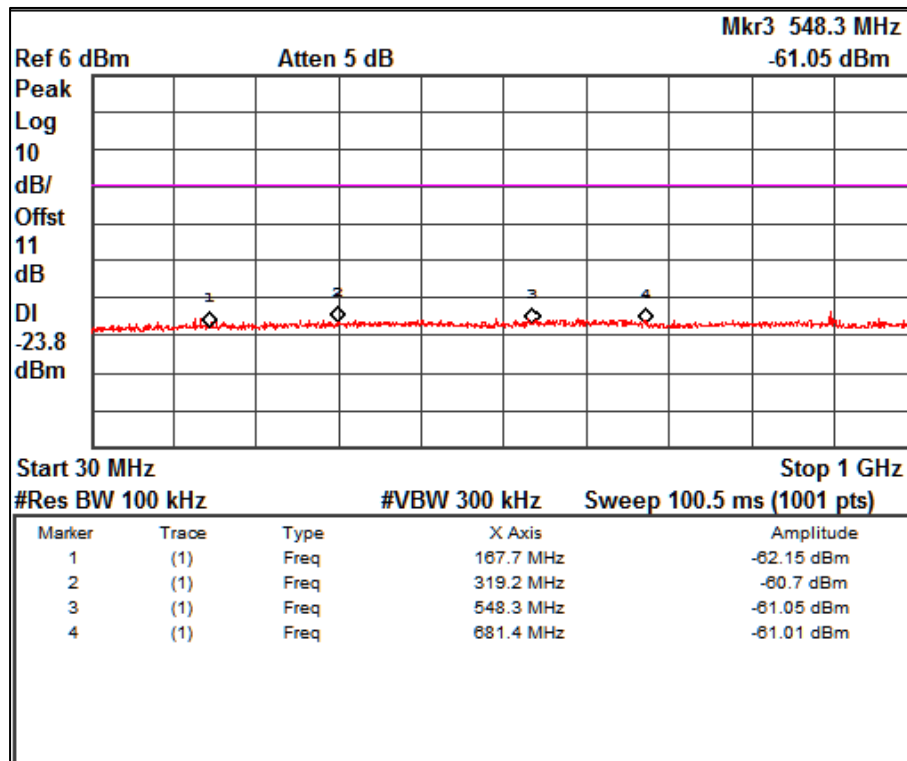

Channel Frequency: 2402MHz

Frequency Range 30MHz – 1GHz

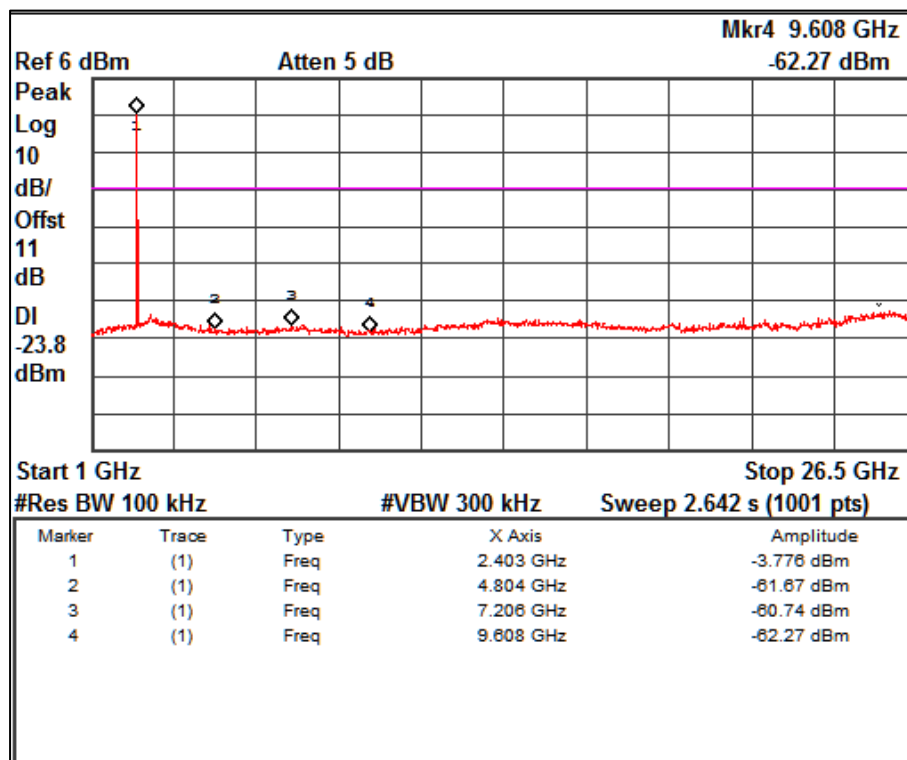


Channel Frequency: 2402MHz

Frequency Range 1GHz to 26.5GHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 38 von 74
Page 38 of 74

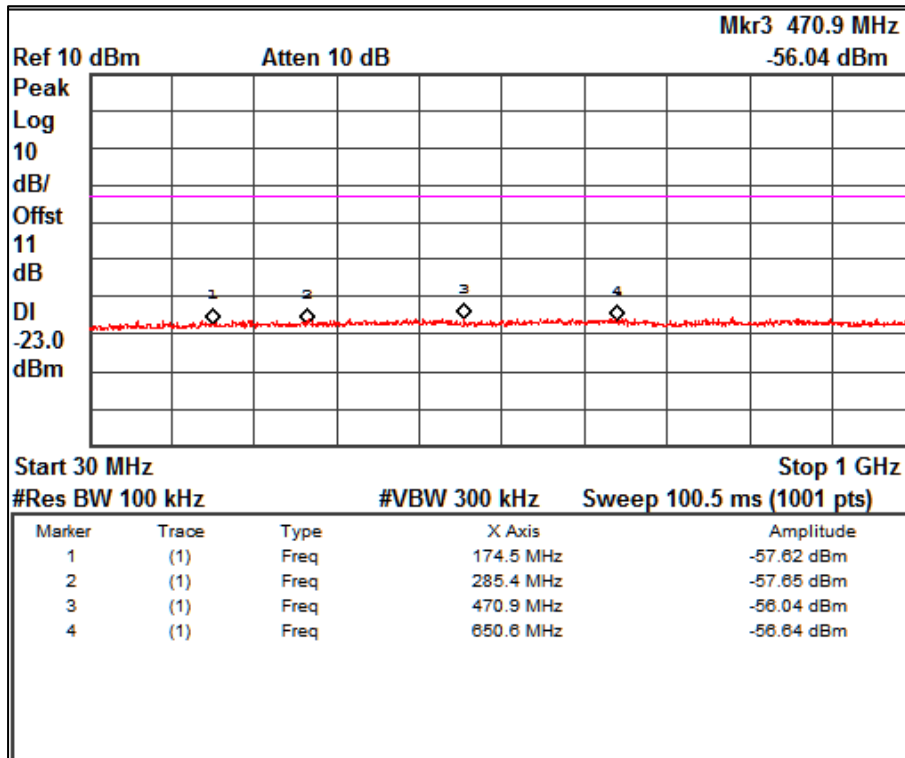

Channel Frequency: 2440MHz

Frequency Range 30MHz – 200MHz

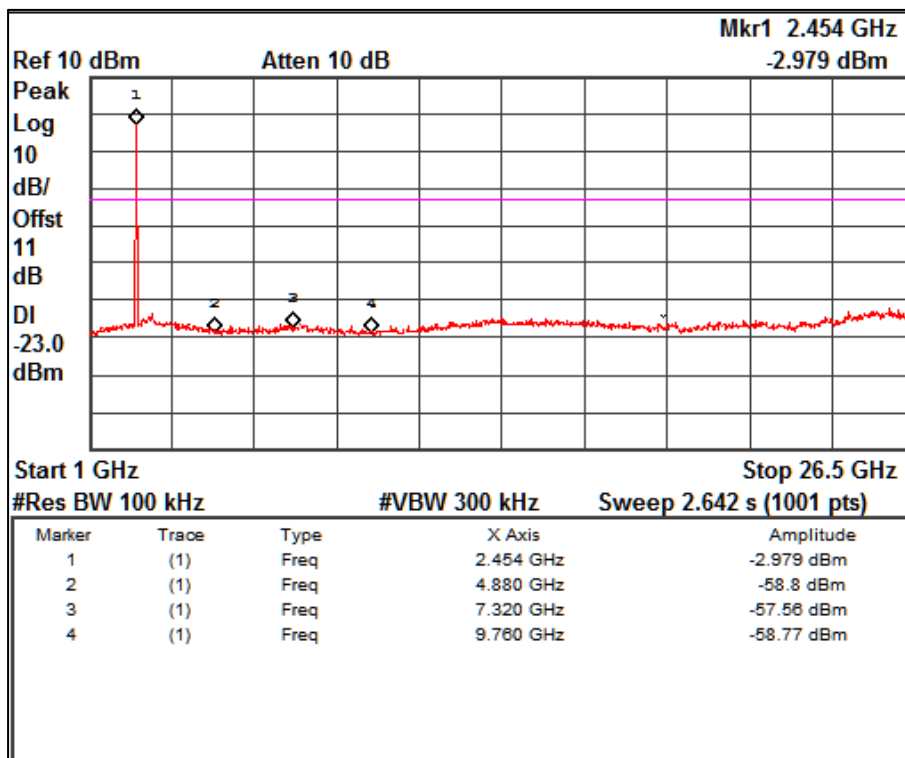


Channel Frequency: 2440MHz

Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 39 von 74
Page 39 of 74

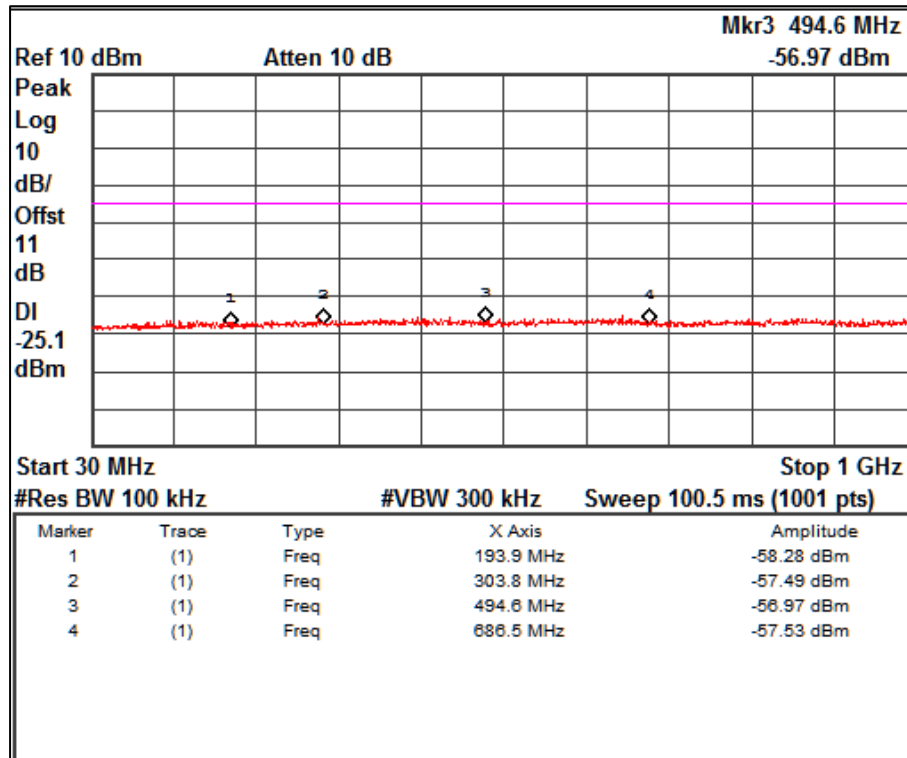

Channel Frequency: 2480MHz

Frequency Range 30MHz – 1GHz

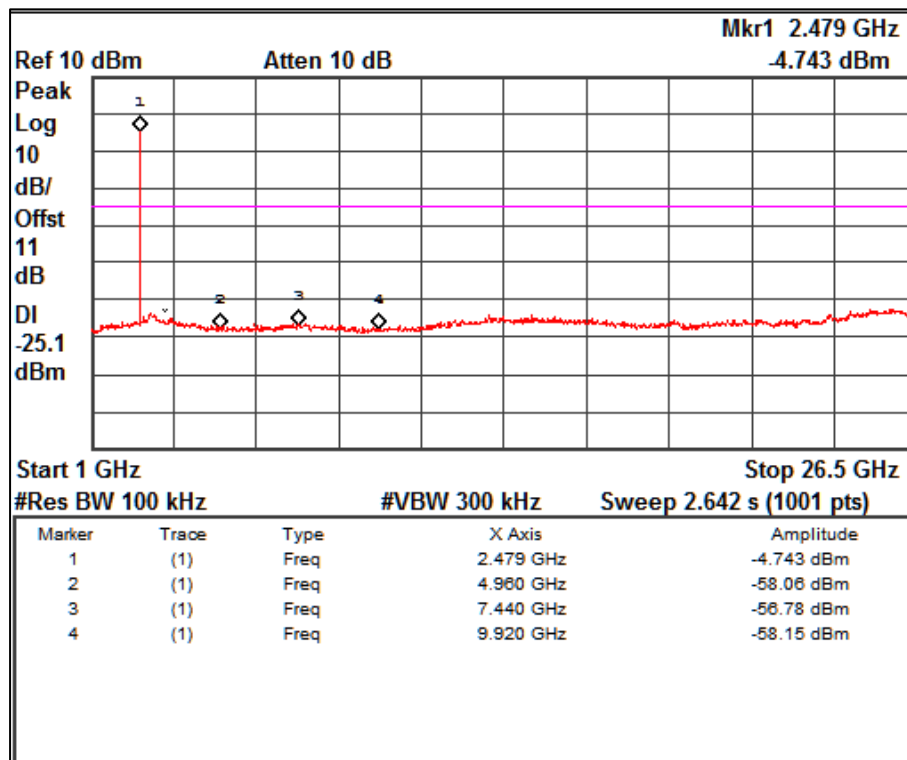

Channel Frequency: 2480MHz


Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 40 von 74
Page 40 of 74

Data Rate: 500Kbps

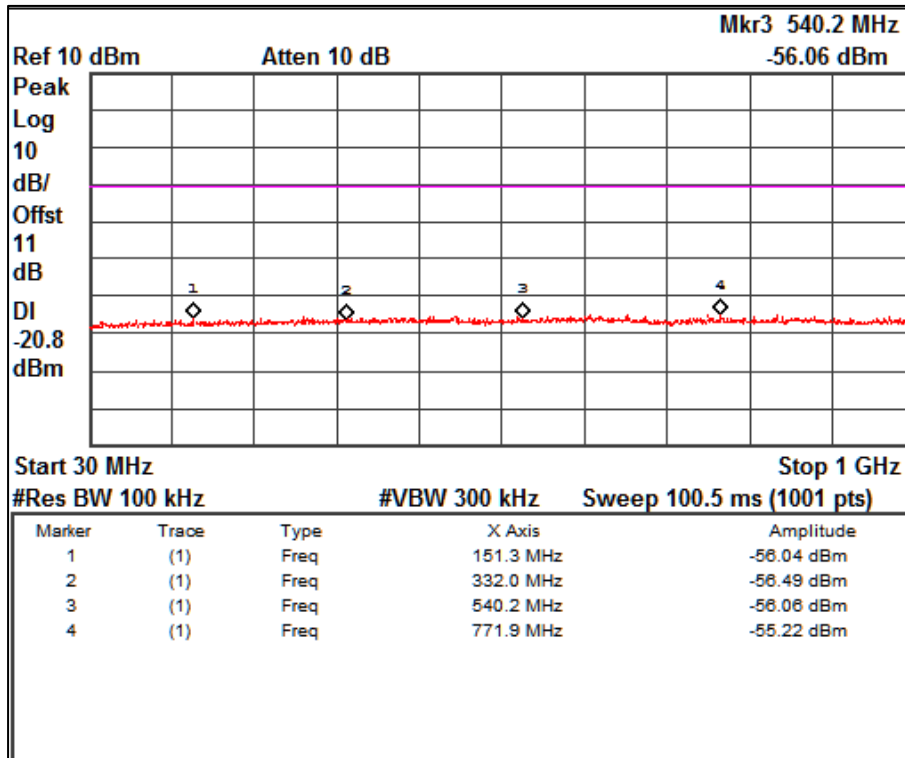

Channel Frequency: 2402MHz

Frequency Range 30MHz – 1GHz

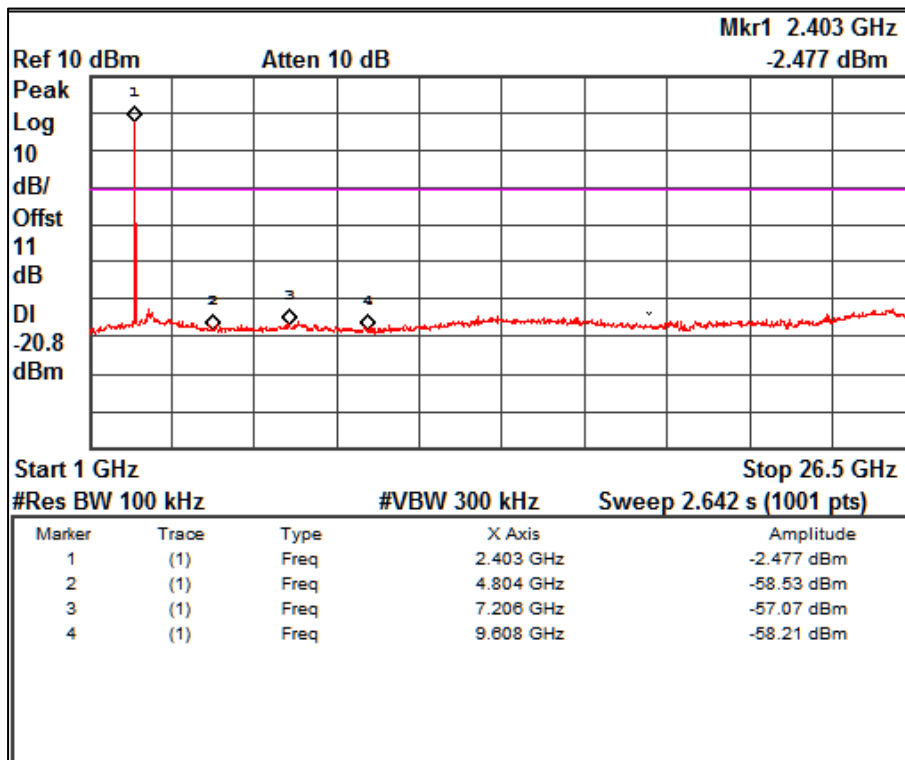


Channel Frequency: 2402MHz

Frequency Range 1GHz to 26.5GHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 41 von 74
Page 41 of 74

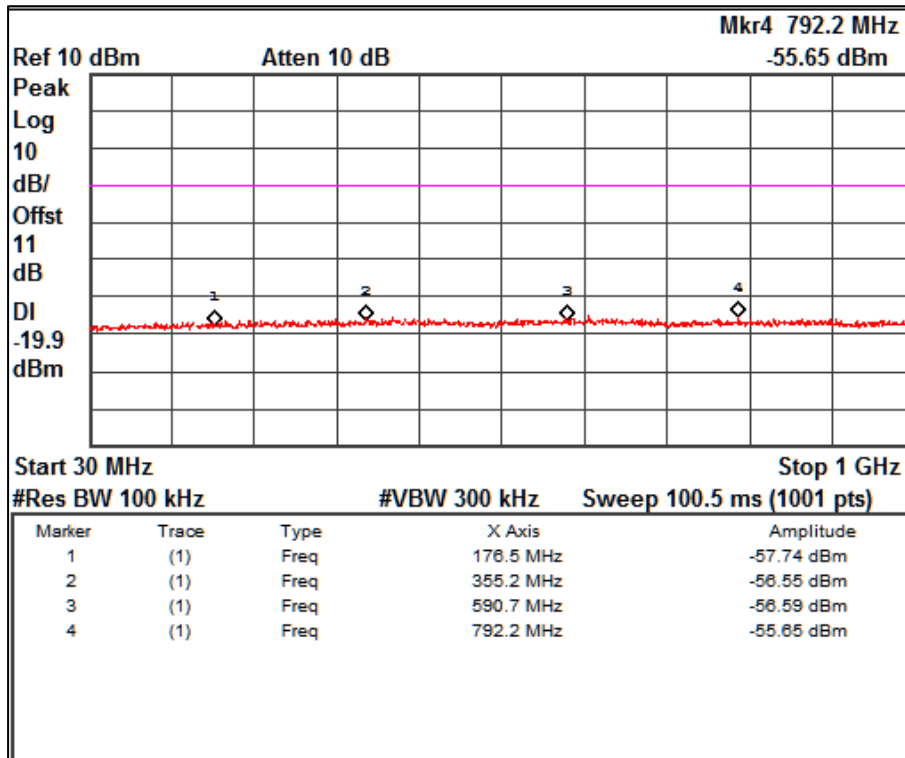

Channel Frequency: 2440MHz

Frequency Range 30MHz – 200MHz

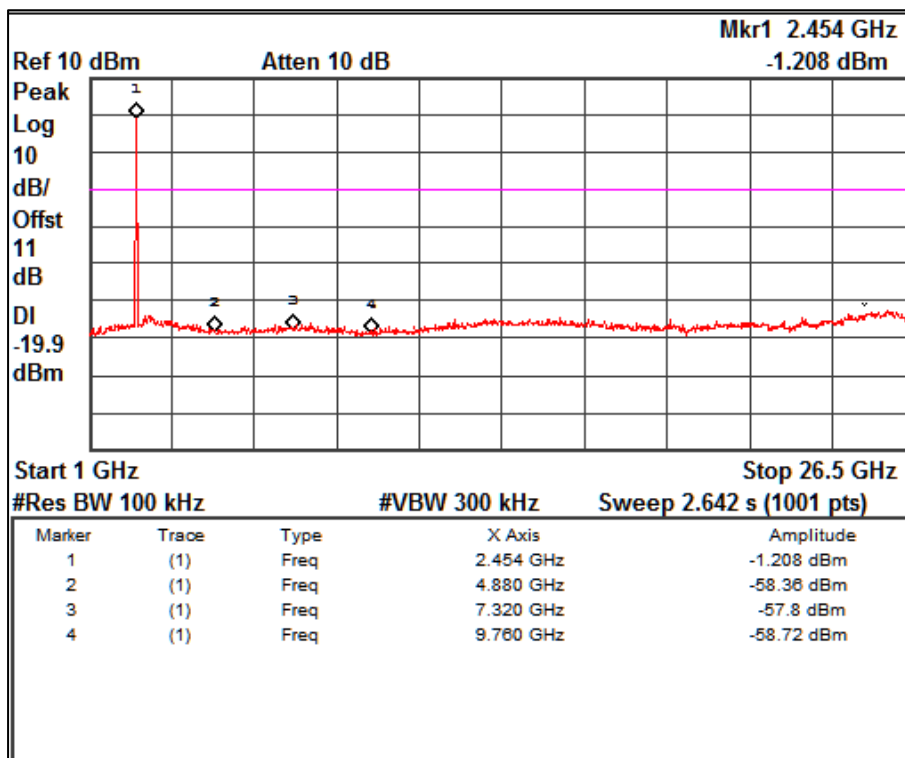


Channel Frequency: 2440MHz

Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 42 von 74
Page 42 of 74

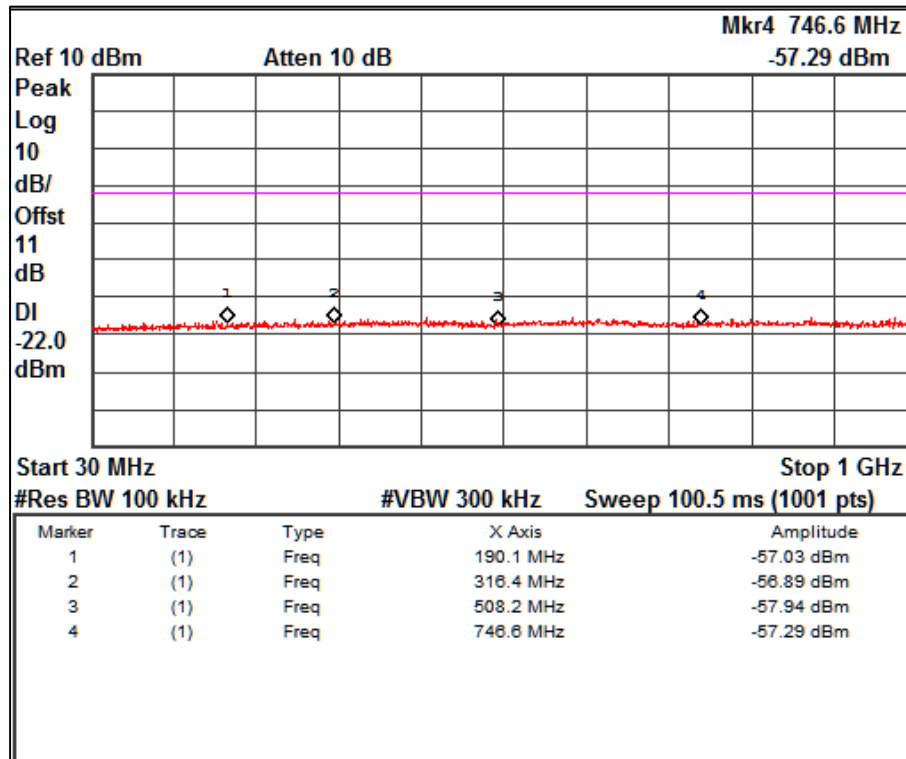

Channel Frequency: 2480MHz

Frequency Range 30MHz – 1GHz

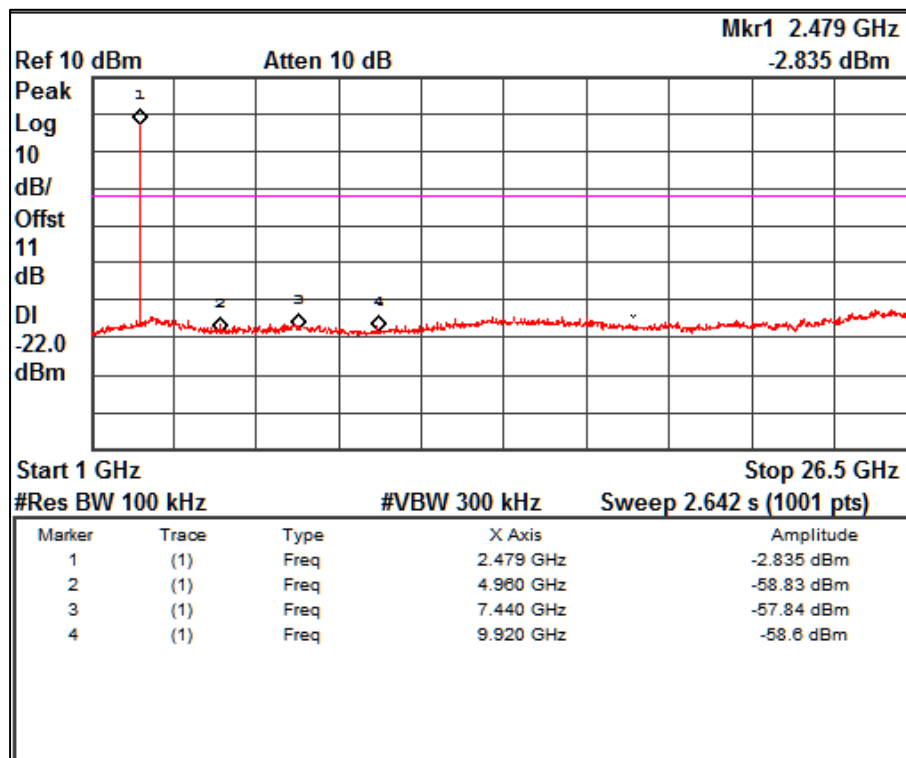

Channel Frequency: 2480MHz


Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 43 von 74
Page 43 of 74

Data Rate: 1Mbps

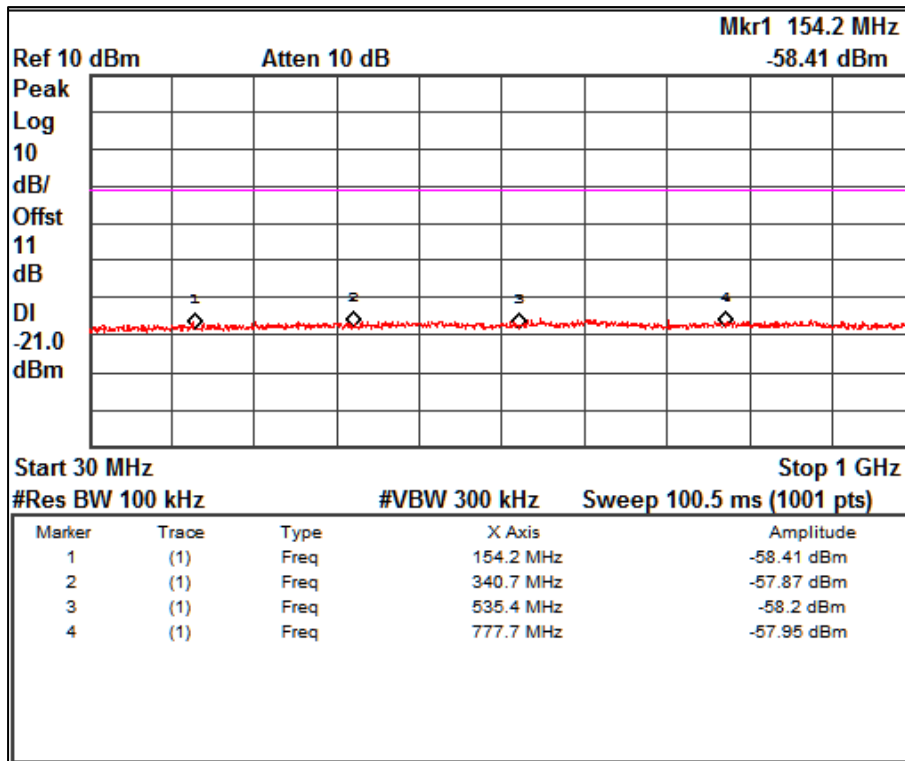

Channel Frequency: 2402 MHz

Frequency Range 30 MHz – 1 GHz

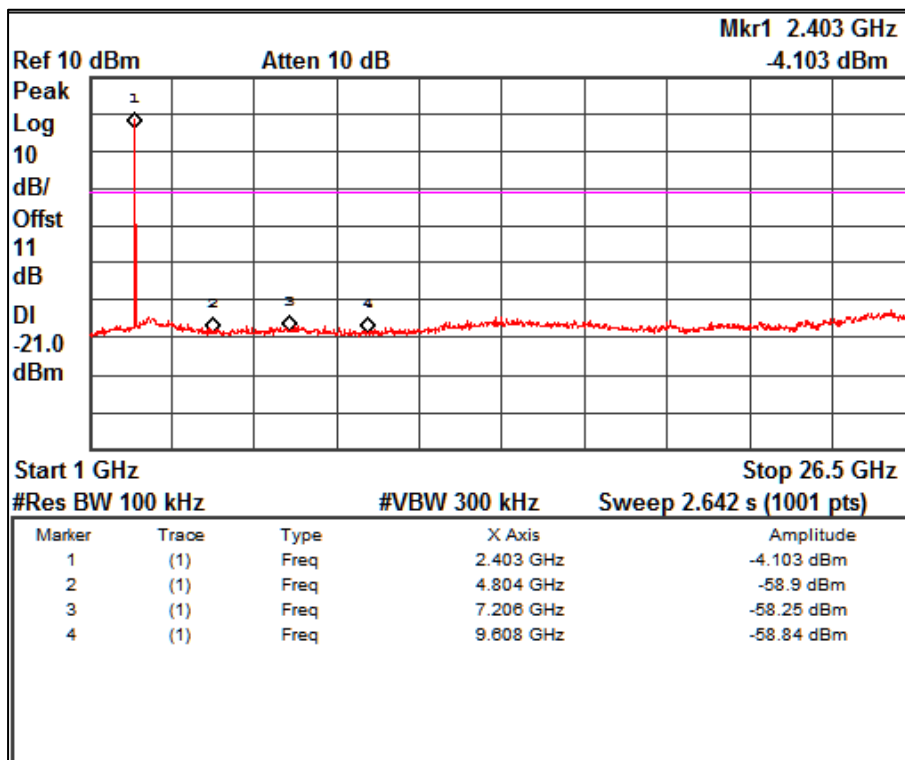


Channel Frequency: 2402 MHz

Frequency Range 1 GHz to 26.5 GHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 44 von 74
Page 44 of 74

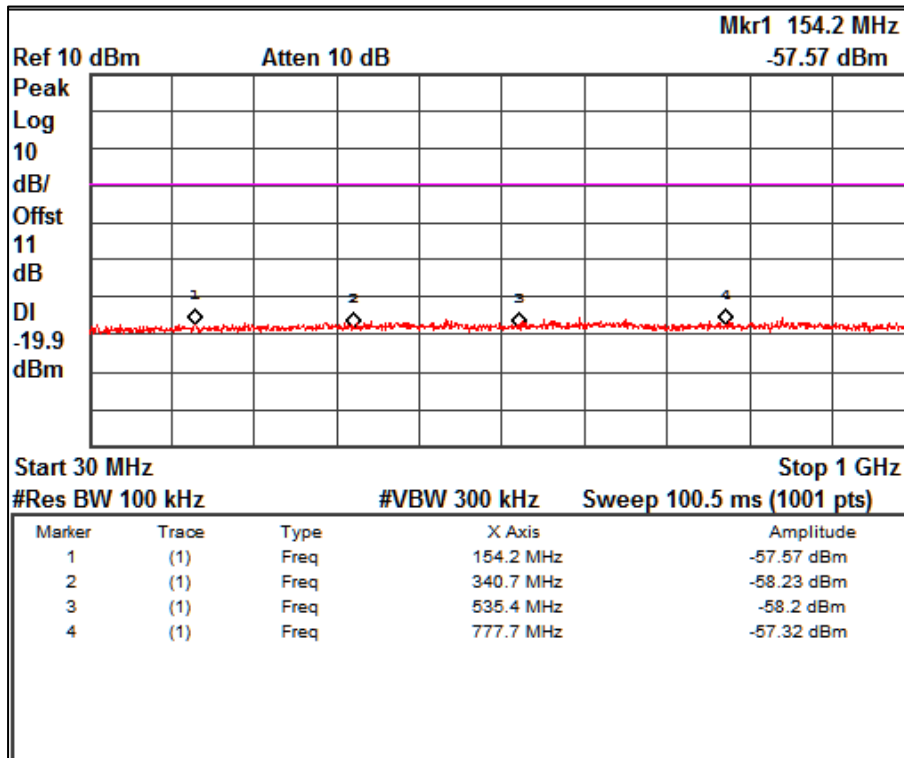

Channel Frequency: 2440MHz

Frequency Range 30MHz – 200MHz

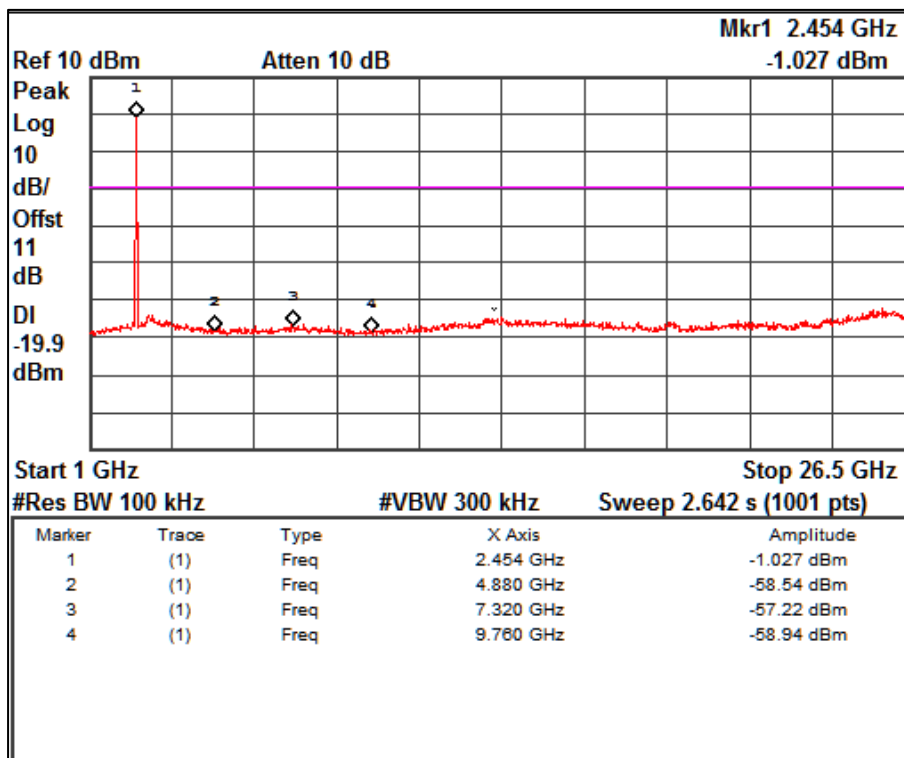


Channel Frequency: 2440MHz

Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 45 von 74
Page 45 of 74

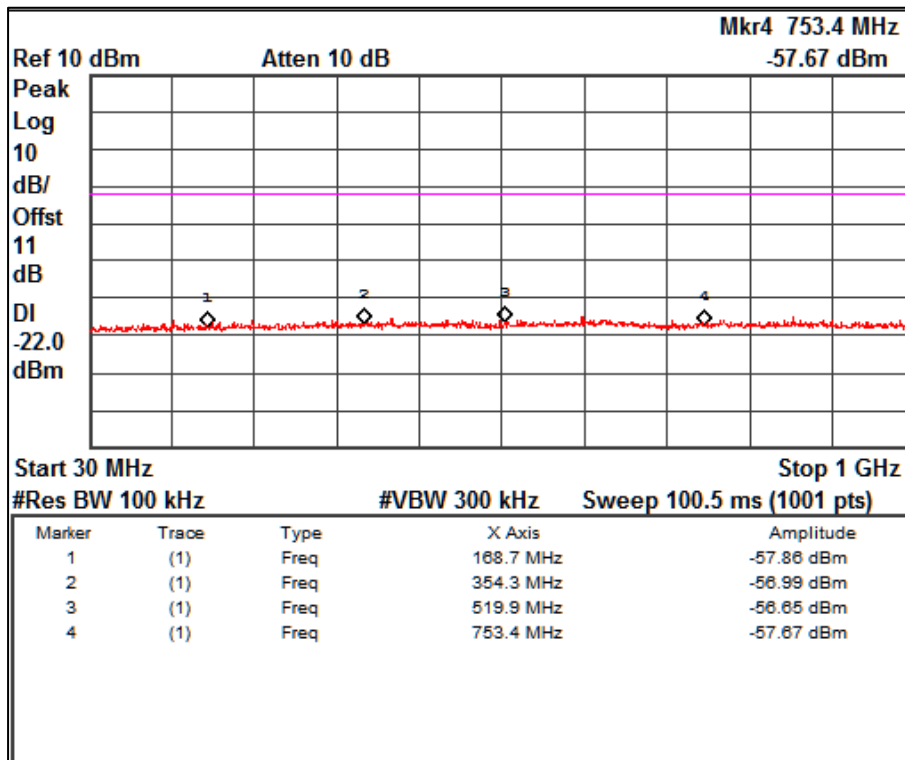

Channel Frequency: 2480MHz

Frequency Range 30MHz – 1GHz

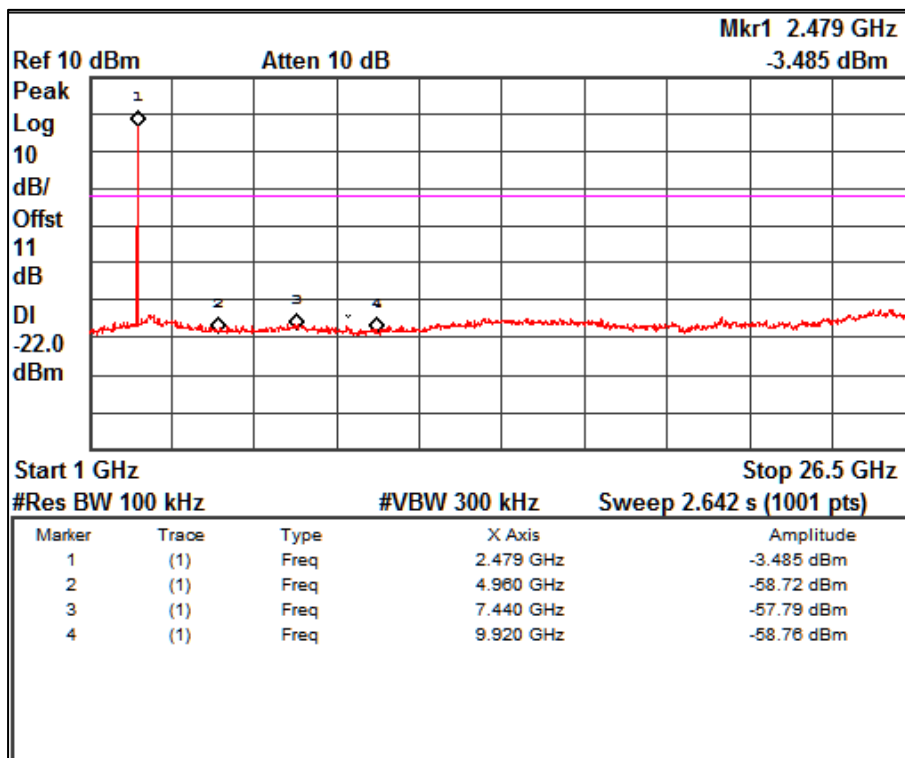

Channel Frequency: 2480MHz


Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 46 von 74
Page 46 of 74

Data Rate: 2Mbps

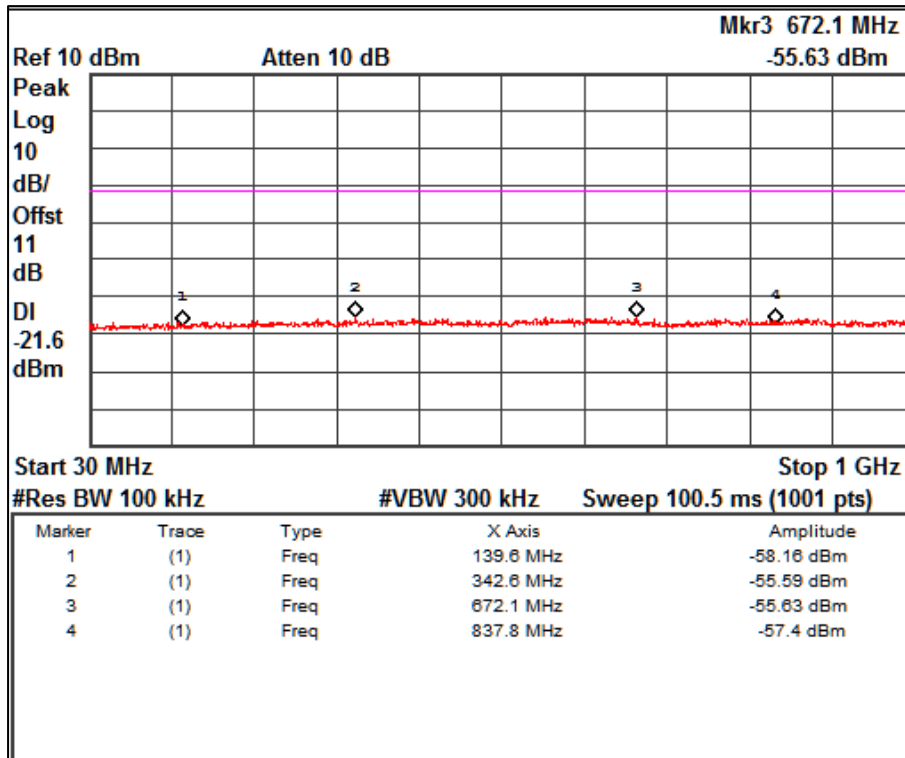

Channel Frequency: 2402MHz

Frequency Range 30MHz – 1GHz

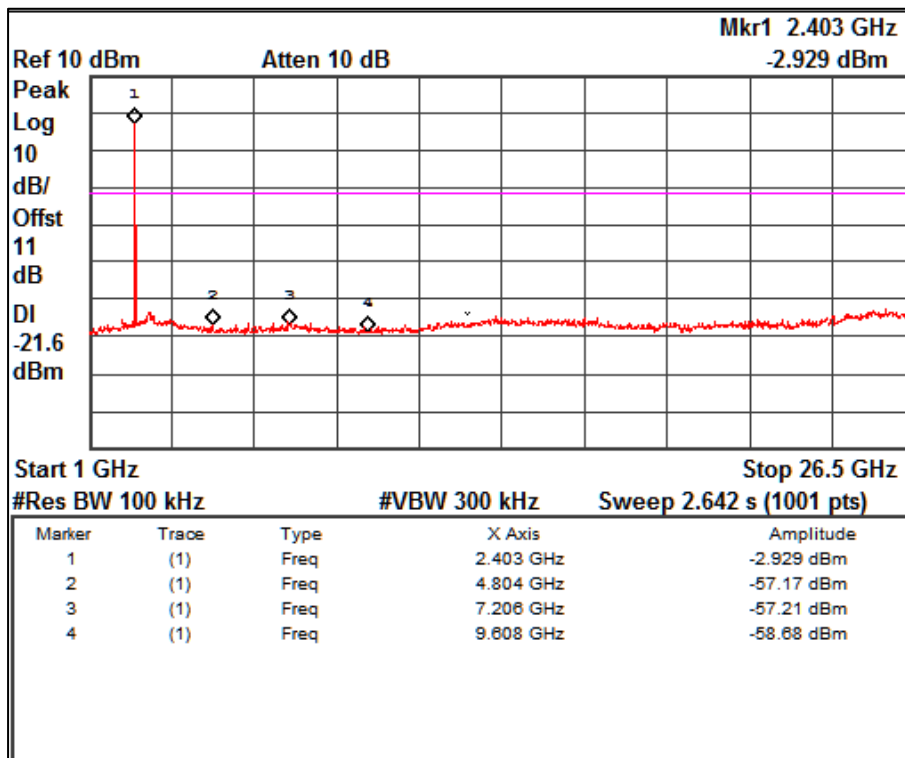


Channel Frequency: 2402MHz

Frequency Range 1GHz to 26.5GHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 47 von 74
Page 47 of 74

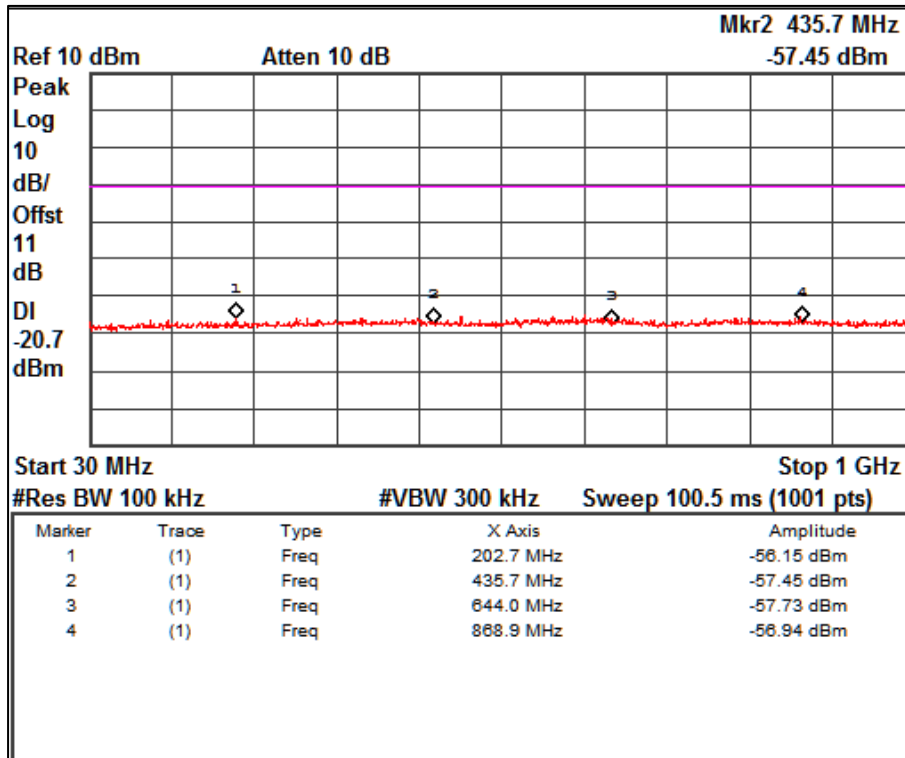

Channel Frequency: 2440MHz

Frequency Range 30MHz – 200MHz

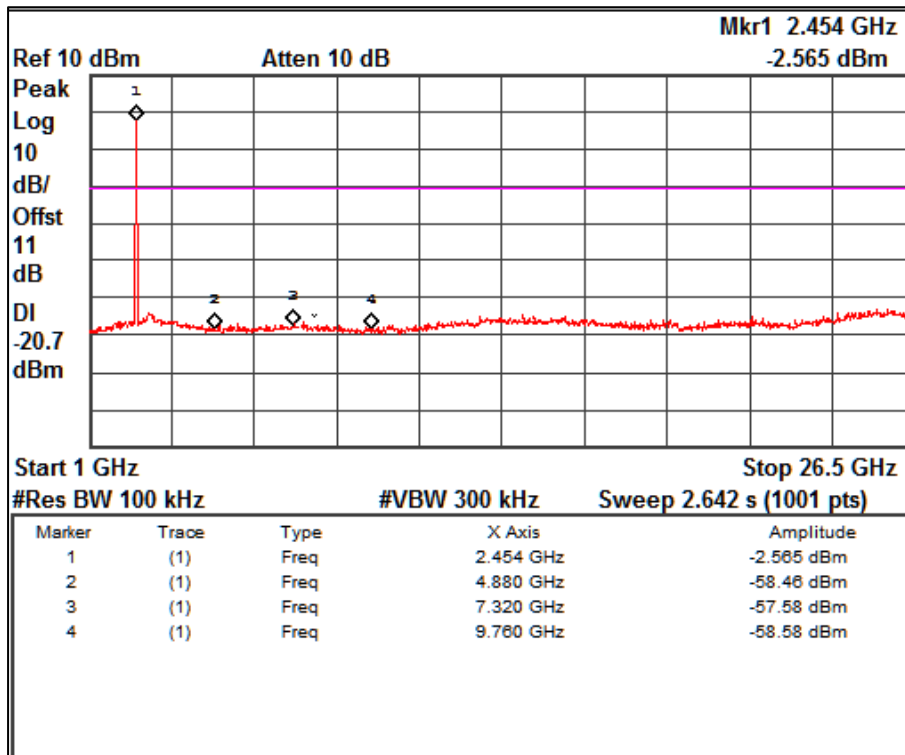


Channel Frequency: 2440MHz

Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 48 von 74
Page 48 of 74

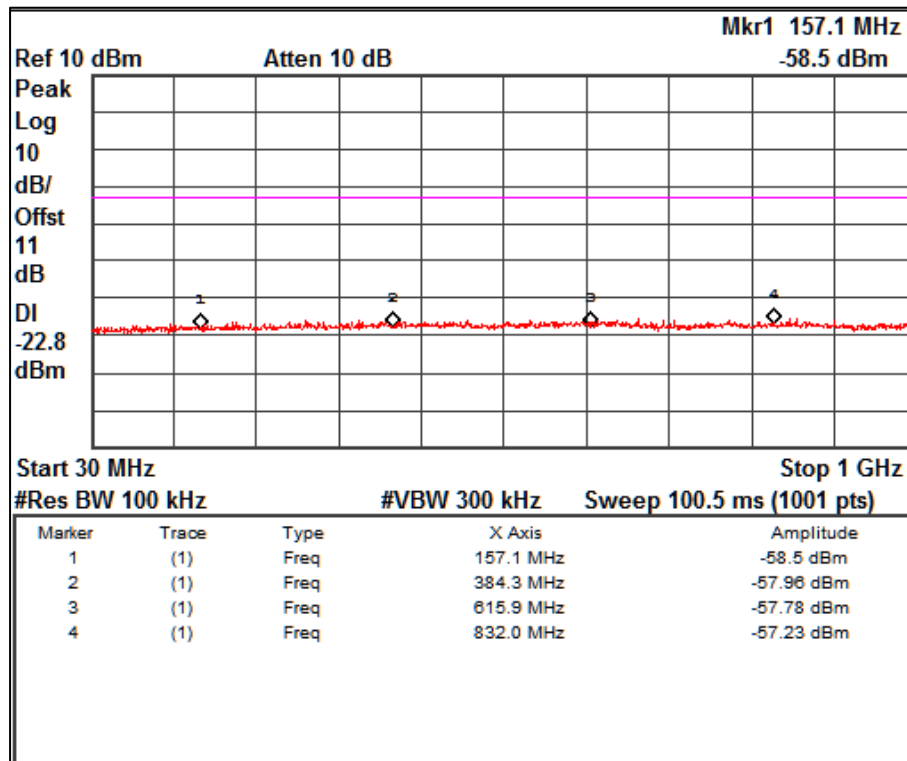

Channel Frequency: 2480MHz

Frequency Range 30MHz – 1GHz

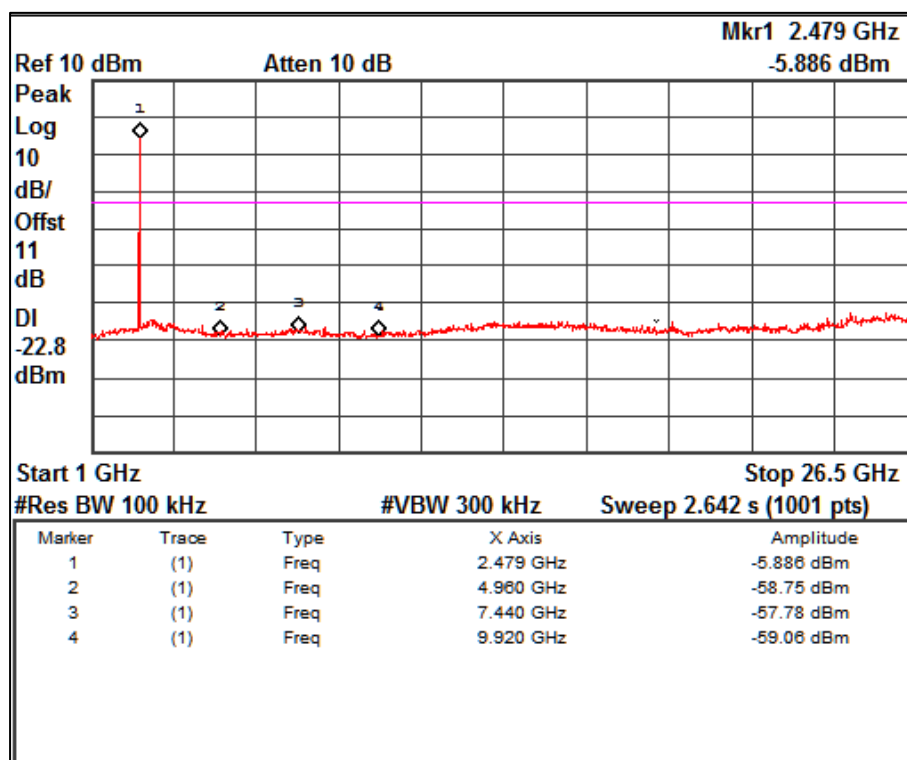

Channel Frequency: 2480MHz

Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 49 von 74
Page 49 of 74

7.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205)/ RSS-Gen Issue 5, Section 8.9 /8.10
Test Method	ANSI C63.10
Measurement Location	Semi Anechoic Chamber 9kHz - 1 GHz Fully Anechoic Chamber 1 GHz - 26GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 6: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = +23.4°C

Voltage = 24VDC through AC-DC Adapter

Relative humidity: 58%

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 50 von 74

Page 50 of 74

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details

Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported.

Table 7: Test results for frequency range 30MHz – 200MHz

Mode	Polarization	Measured Frequency (MHz)	Measured emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Power supply	Vertical	31.61(QP)	32.09	40.00	-7.91
		41.13(Pk)	27.61	40.00	-12.39
		49.11(Pk)	29.28	40.00	-10.72
		77.70(Pk)	29.97	40.00	-10.03
		90.06(Pk)	26.94	43.50	-16.56
	Horizontal	31.65(Pk)	25.33	40.00	-14.67
		48.75(Pk)	21.13	40.00	-18.87
		77.52(Pk)	33.02	40.00	-6.98
		87.84(Pk)	26.18	40.00	-13.82
		96.09(Pk)	29.77	43.50	-13.73
Battery	Vertical	35.55(Pk)	25.99	40.00	-14.01
		37.5(Pk)	22.50	40.00	-17.50
		54.87(Pk)	16.67	40.00	-23.33
		77.67(Pk)	19.79	40.00	-20.21
		97.47(Pk)	22.37	43.50	-21.13
	Horizontal	47.49(Pk)	12.57	40.00	-27.43
		51.90(Pk)	12.58	40.00	-27.42
		80.40(Pk)	12.68	40.00	-27.32
		81.93(Pk)	14.08	40.00	-25.92
		97.83(Pk)	12.11	43.50	-31.39

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 51 von 74
Page 51 of 74

Table 8: Test results for frequency range 200MHz – 1GHz

Mode	Polarization	Measured Frequency (MHz)	Measured emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Power supply	Vertical	228.98(Pk)	23.52	40.00	-16.48
		245.81(Pk)	23.78	40.00	-16.22
		315.50(Pk)	26.41	40.00	-13.59
		326.81(Pk)	27.68	40.00	-12.32
		415.25(Pk)	26.06	43.50	-17.44
	Horizontal	275.66(Pk)	30.56	40.00	-9.44
		278.99(Pk)	27.07	40.00	-12.93
		312.17(Pk)	32.87	40.00	-7.13
		315.50(Pk)	34.48	40.00	-5.52
		328.79(Pk)	30.23	43.50	-13.27
Battery	Vertical	325.37(Pk)	24.03	40.00	-15.97
		331.55(Pk)	27.04	40.00	-12.96
		343.79(Pk)	30.82	40.00	-9.18
		354.23(Pk)	27.72	40.00	-12.28
		362.93(Pk)	20.47	43.50	-23.03
	Horizontal	234.59(Pk)	13.13	40.00	-26.87
		274.10(Pk)	15.56	40.00	-24.44
		361.70(Pk)	19.90	40.00	-20.10
		507.74(Pk)	21.01	40.00	-18.99
		887.42(Pk)	28.12	43.50	-15.38


Test Plots:

Mode: Power supply

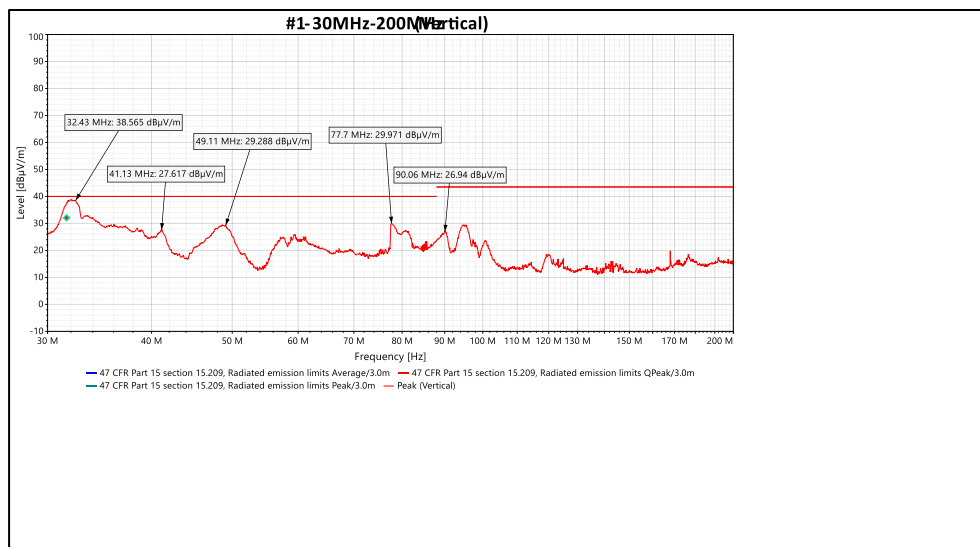


Channel Frequency 30MHz – 200MHz

Polarization Vertical

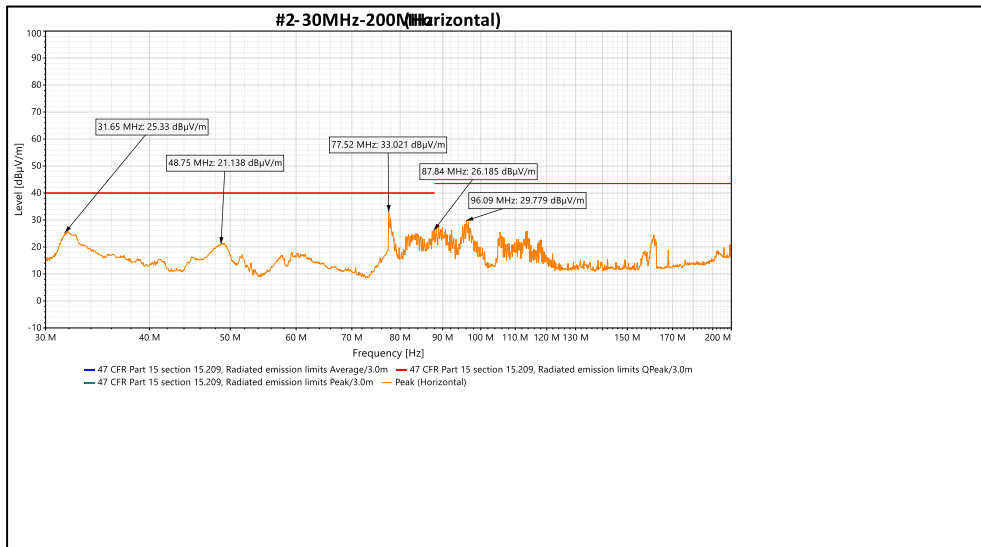


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

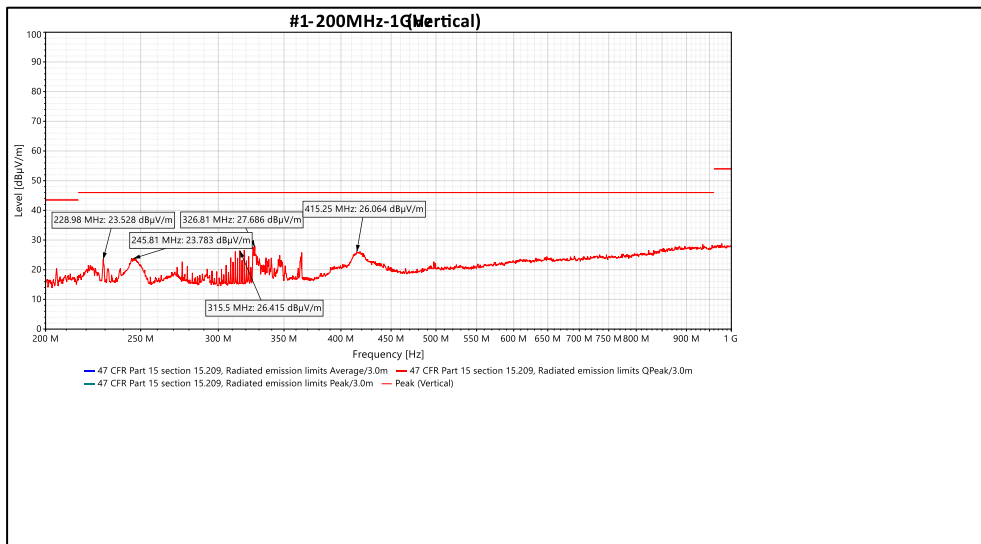

Channel Frequency 200MHz – 1GHz

Polarization Vertical

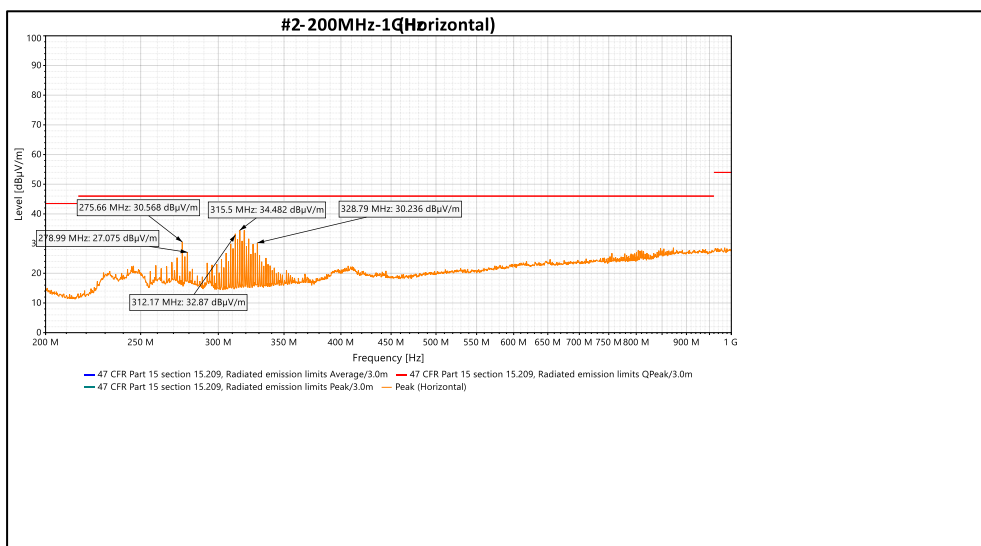

Channel Frequency 200MHz – 1GHz


Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 53 von 74
Page 53 of 74

Mode: Battery

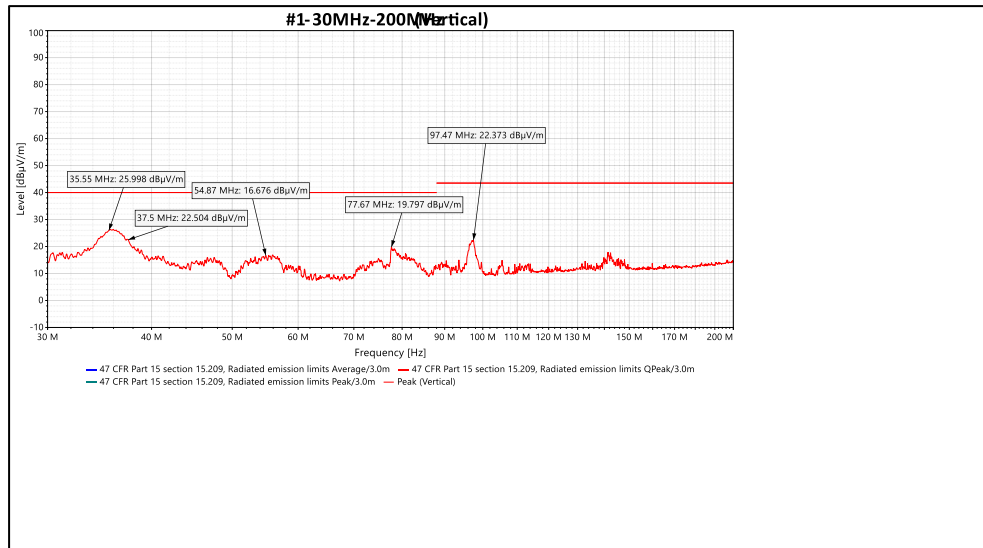


Channel Frequency 30MHz – 200MHz

Polarization Vertical

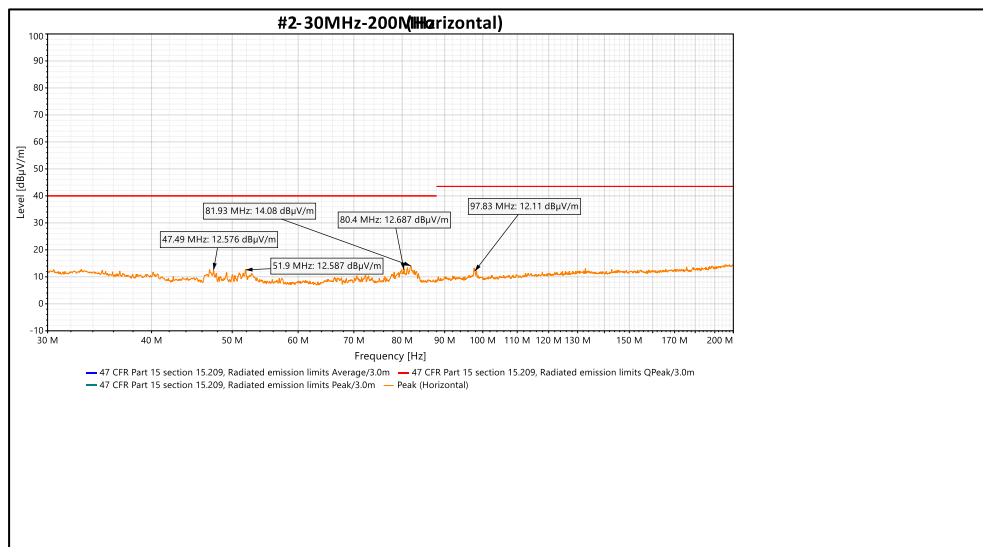


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

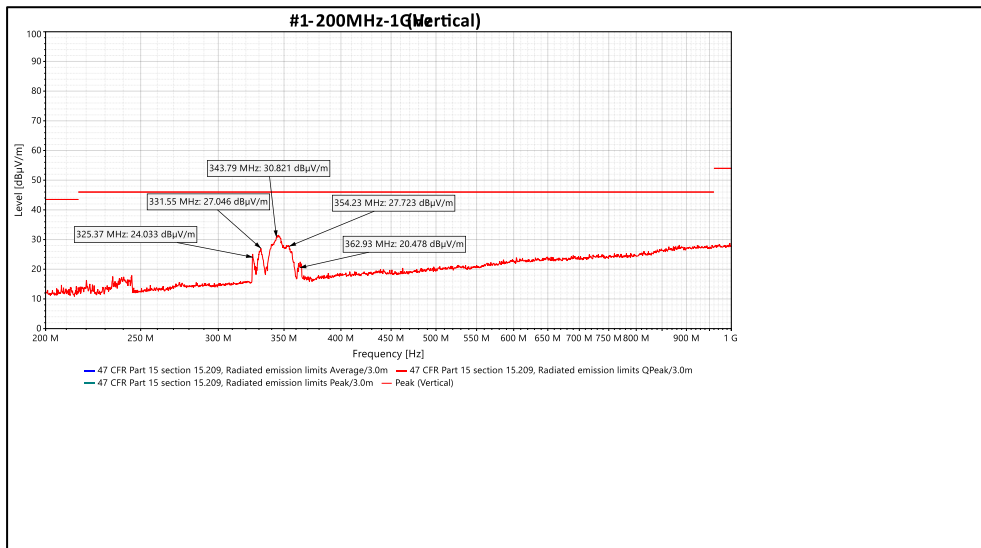

Channel Frequency 200MHz – 1GHz

Polarization Vertical

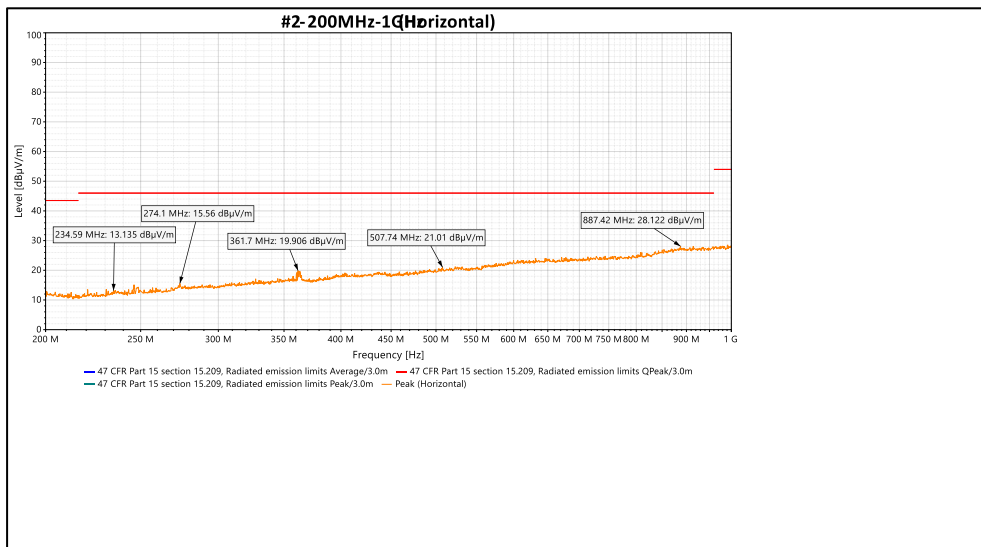

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 55 von 74

Page 55 of 74

Table 9: Test results for the frequencies above 1GHz:

Data Rate: 125Kbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	89.20	-	-
	2402(Av)		87.99	-	-
	2390(Pk)		36.43	74.00*	-37.57
	2390(Av)		23.70	54.00*	-30.30
	4804(Pk)		42.16	74.00	-31.84
	4804(Av)		31.14	54.00	-22.86
	7206(Pk)		45.94	74.00	-28.06
	7206(Av)		33.94	54.00	-20.06
	2402(Pk)	Horizontal	88.74	-	-
	2402(Av)		87.56	-	-
	2390(Pk)		37.14	74.00*	-36.86
	2390(Av)		23.82	54.00*	-30.18
	4804(Pk)		43.36	74.00	-30.64
	4804(Av)		32.23	54.00	-21.77
	7206(Pk)		45.43	74.00	-28.57
	7206(Av)		33.80	54.00	-20.20
2440	2440(Pk)	Vertical	91.45	-	-
	2440(Av)		90.32	-	-
	4880(Pk)		49.76	74.00	-24.24
	4880(Av)		42.53	54.00	-11.47
	7320(Pk)		46.24	74.00	-27.76
	7320(Av)		34.01	54.00	-19.99
	2440(Pk)	Horizontal	90.52	-	-
	2440(Av)		89.34	-	-
	4880(Pk)		47.30	74.00	-26.70
	4880(Av)		38.21	54.00	-15.79
	7320(Pk)		45.52	74.00	-28.48
	7320(Av)		33.77	54.00	-20.23
2480	2480(Pk)	Vertical	88.23	-	-
	2480(Av)		87.22	-	-
	2483.5(Pk)		37.77	74.00*	-36.23
	2483.5(Av)		25.62	54.00*	-28.38
	4960(Pk)		51.22	74.00	-22.78
	4960(Av)		44.46	54.00	-9.54
	7440(Pk)		45.32	74.00	-28.68
	7440(Av)		33.74	54.00	-20.26
	2480(Pk)	Horizontal	87.16	-	-
	2480(Av)		86.13	-	-
	2483.5(Pk)		37.74	74.00*	-36.26
	2483.5(Av)		25.29	54.00*	-28.71
	4960(Pk)		47.53	74.00	-26.47
	4960(Av)		38.87	54.00	-15.13
	7440(Pk)		45.62	74.00	-28.38
	7440(Av)		33.76	54.00	-20.24

_ → Fundamental Frequency

*→ Restricted Band edges

Pk: Peak Detector;

Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 56 von 74
Page 56 of 74

Data Rate: 500Kbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	89.42	-	-
	2402(Av)		88.33	-	-
	2390(Pk)		37.10	74.00*	-36.90
	2390(Av)		23.91	54.00*	-30.09
	4804(Pk)		43.71	74.00	-30.29
	4804(Av)		32.44	54.00	-21.56
	7206(Pk)		46.69	74.00	-27.31
	7206(Av)		34.05	54.00	-19.95
	2402(Pk)	Horizontal	88.83	-	-
	2402(Av)		87.74	-	-
	2390(Pk)		37.57	74.00*	-36.43
	2390(Av)		23.89	54.00*	-30.11
	4804(Pk)		43.00	74.00	-31.00
	4804(Av)		31.15	54.00	-22.85
	7206(Pk)		46.44	74.00	-27.56
	7206(Av)		34.12	54.00	-19.88
2440	2440(Pk)	Vertical	91.53	-	-
	2440(Av)		90.52	-	-
	4880(Pk)		49.14	74.00	-24.86
	4880(Av)		41.78	54.00	-12.22
	7320(Pk)		45.98	74.00	-28.02
	7320(Av)		34.09	54.00	-19.91
	2440(Pk)	Horizontal	90.53	-	-
	2440(Av)		89.51	-	-
	4880(Pk)		49.77	74.00	-24.23
	4880(Av)		42.43	54.00	-11.57
	7320(Pk)		46.86	74.00	-27.14
	7320(Av)		33.69	54.00	-20.31
2480	2480(Pk)	Vertical	88.08	-	-
	2480(Av)		87.13	-	-
	2483.5(Pk)		37.97	74.00*	-36.03
	2483.5(Av)		25.61	54.00*	-28.39
	4960(Pk)		50.93	74.00	-23.07
	4960(Av)		44.93	54.00	-9.07
	7440(Pk)		45.98	74.00	-28.02
	7440(Av)		33.82	54.00	-20.18
	2480(Pk)	Horizontal	87.08	-	-
	2480(Av)		86.11	-	-
	2483.5(Pk)		38.09	74.00*	-35.91
	2483.5(Av)		25.15	54.00*	-28.85
	4960(Pk)		47.76	74.00	-26.24
	4960(Av)		39.47	54.00	-14.53
	7440(Pk)		46.43	74.00	-27.57
	7440(Av)		33.84	54.00	-20.16

_ → Fundamental Frequency

*→ Restricted Band edges

Pk: Peak Detector;

Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 57 von 74
Page 57 of 74

Data Rate: 1Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	89.40	-	-
	2402(Av)		88.33	-	-
	2390(Pk)		37.00	74.00*	-37.00
	2390(Av)		23.78	54.00*	-30.22
	4804(Pk)		42.62	74.00	-31.38
	4804(Av)		31.35	54.00	-22.65
	7206(Pk)		46.78	74.00	-27.22
	7206(Av)		33.96	54.00	-20.04
	2402(Pk)	Horizontal	88.65	-	-
	2402(Av)		87.57	-	-
	2390(Pk)		36.63	74.00*	-37.37
	2390(Av)		23.87	54.00*	-30.13
	4804(Pk)		45.87	74.00	-28.13
	4804(Av)		35.98	54.00	-18.02
	7206(Pk)		46.01	74.00	-27.99
	7206(Av)		33.79	54.00	-20.21
2440	2440(Pk)	Vertical	91.38	-	-
	2440(Av)		90.39	-	-
	4880(Pk)		49.33	74.00	-24.67
	4880(Av)		42.18	54.00	-11.82
	7320(Pk)		47.09	74.00	-26.91
	7320(Av)		34.08	54.00	-19.92
	2440(Pk)	Horizontal	90.31	-	-
	2440(Av)		89.31	-	-
	4880(Pk)		48.50	74.00	-25.50
	4880(Av)		40.69	54.00	-13.31
	7320(Pk)		46.15	74.00	-27.85
	7320(Av)		33.79	54.00	-20.21
2480	2480(Pk)	Vertical	88.14	-	-
	2480(Av)		87.21	-	-
	2483.5(Pk)		38.83	74.00*	-35.17
	2483.5(Av)		25.67	54.00*	-28.33
	4960(Pk)		52.50	74.00	-21.50
	4960(Av)		47.13	54.00	-6.87
	7440(Pk)		46.00	74.00	-28.00
	7440(Av)		33.74	54.00	-20.26
	2480(Pk)	Horizontal	87.03	-	-
	2480(Av)		86.08	-	-
	2483.5(Pk)		38.84	74.00*	-35.16
	2483.5(Av)		25.07	54.00*	-28.93
	4960(Pk)		47.28	74.00	-26.72
	4960(Av)		39.38	54.00	-14.62
	7440(Pk)		46.38	74.00	-27.62
	7440(Av)		33.98	54.00	-20.02

_ → Fundamental Frequency

*→ Restricted Band edges

Pk: Peak Detector;

Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 58 von 74
Page 58 of 74

Data Rate: 2Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	89.32	-	-
	2402(Av)		86.54	-	-
	2390(Pk)		36.71	74.00*	-37.29
	2390(Av)		23.74	54.00*	-30.26
	4804(Pk)		44.26	74.00	-29.74
	4804(Av)		33.24	54.00	-20.76
	7206(Pk)		47.55	74.00	-26.45
	7206(Av)		35.02	54.00	-18.98
	2402(Pk)	Horizontal	88.83	-	-
	2402(Av)		86.07	-	-
	2390(Pk)		36.73	74.00*	-37.27
	2390(Av)		23.81	54.00*	-30.19
	4804(Pk)		45.59	74.00	-28.41
	4804(Av)		34.37	54.00	-19.63
	7206(Pk)		46.92	74.00	-27.08
	7206(Av)		34.78	54.00	-19.22
2440	2440(Pk)	Vertical	91.32	-	-
	2440(Av)		88.72	-	-
	4880(Pk)		49.44	74.00	-24.56
	4880(Av)		39.85	54.00	-14.15
	7320(Pk)		46.89	74.00	-27.11
	7320(Av)		34.99	54.00	-19.01
	2440(Pk)	Horizontal	90.02	-	-
	2440(Av)		87.37	-	-
	4880(Pk)		47.04	74.00	-26.96
	4880(Av)		37.35	54.00	-16.65
	7320(Pk)		47.02	74.00	-26.98
	7320(Av)		34.69	54.00	-19.31
2480	2480(Pk)	Vertical	88.19	-	-
	2480(Av)		85.80	-	-
	2483.5(Pk)		42.63	74.00*	-31.37
	2483.5(Av)		30.82	54.00*	-23.18
	4960(Pk)		51.50	74.00	-22.50
	4960(Av)		43.13	54.00	-10.87
	7440(Pk)		46.48	74.00	-27.52
	7440(Av)		34.50	54.00	-19.50
	2480(Pk)	Horizontal	86.89	-	-
	2480(Av)		84.46	-	-
	2483.5(Pk)		40.49	74.00*	-33.51
	2483.5(Av)		29.08	54.00*	-24.92
	4960(Pk)		46.47	74.00	-27.53
	4960(Av)		36.32	54.00	-17.68
	7440(Pk)		46.90	74.00	-27.10
	7440(Av)		34.64	54.00	-19.36

_ → Fundamental Frequency

*→ Restricted Band edges

Pk: Peak Detector;

Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:



IN25JD8U 001

Seite 59 von 74
Page 59 of 74

Test Plots:

Restricted Bands of Operation


Data Rate: 1Mbps

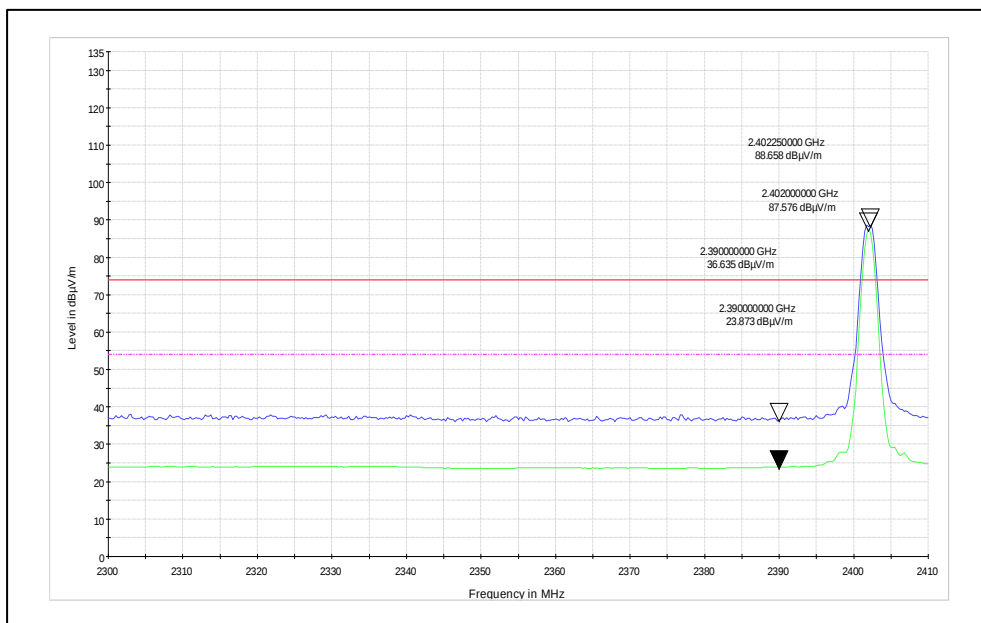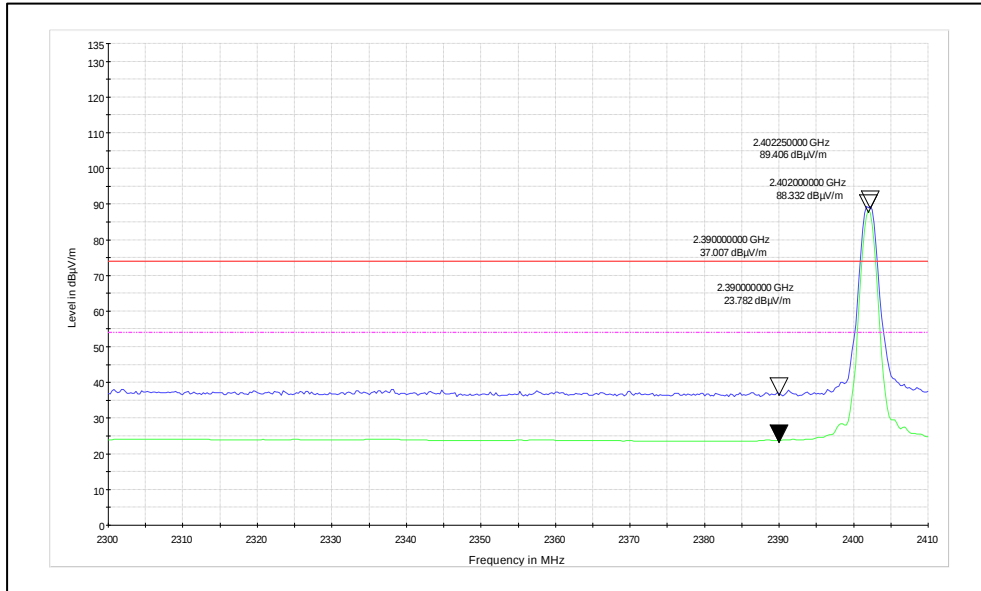

Prüfbericht - Nr.:
Test Report No.:


IN25JD8U 001

Seite 60 von 74
Page 60 of 74

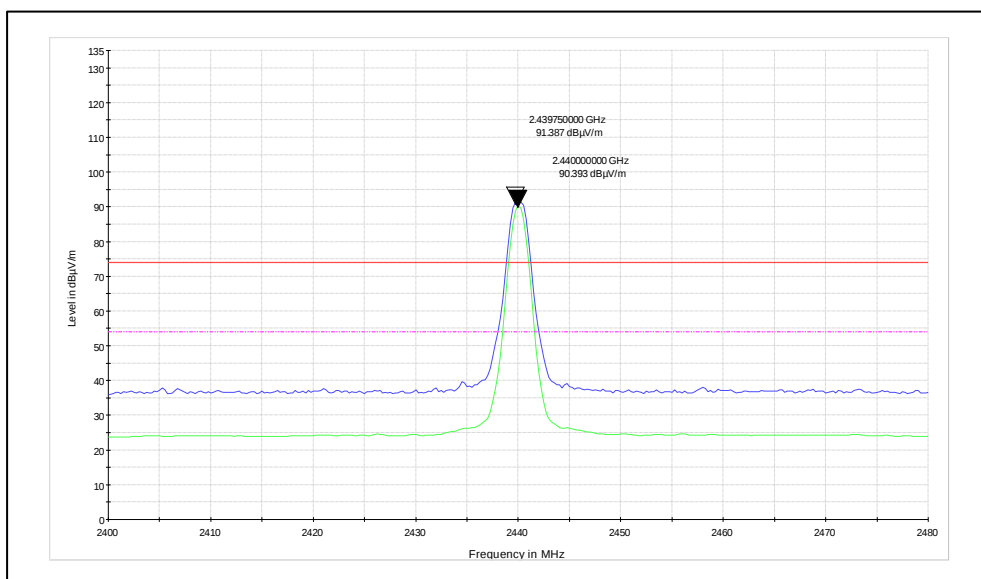


Channel Frequency: 2440MHz

Polarization: Vertical

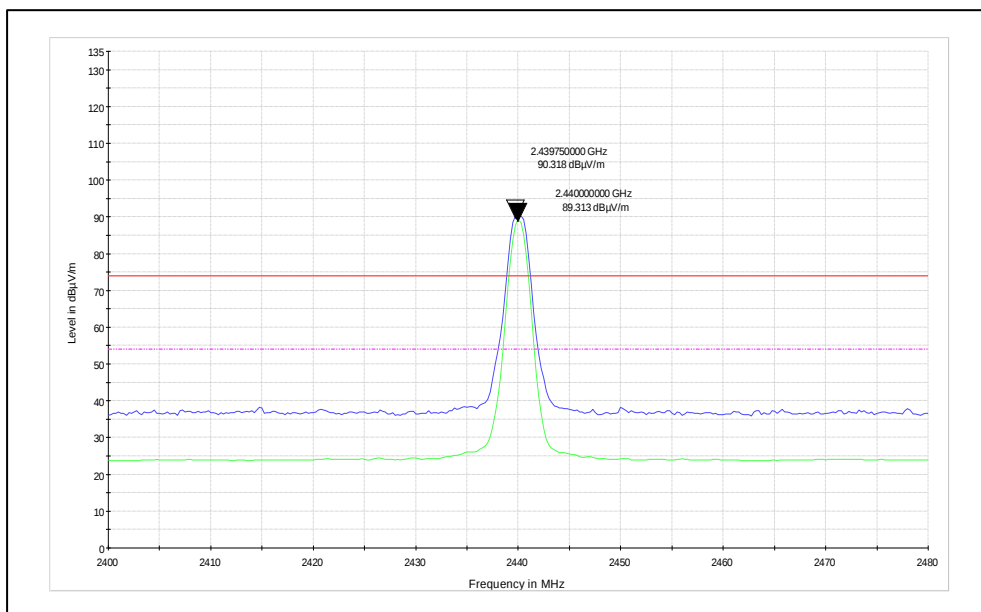


Channel Frequency: 2440MHz

Polarization: Horizontal

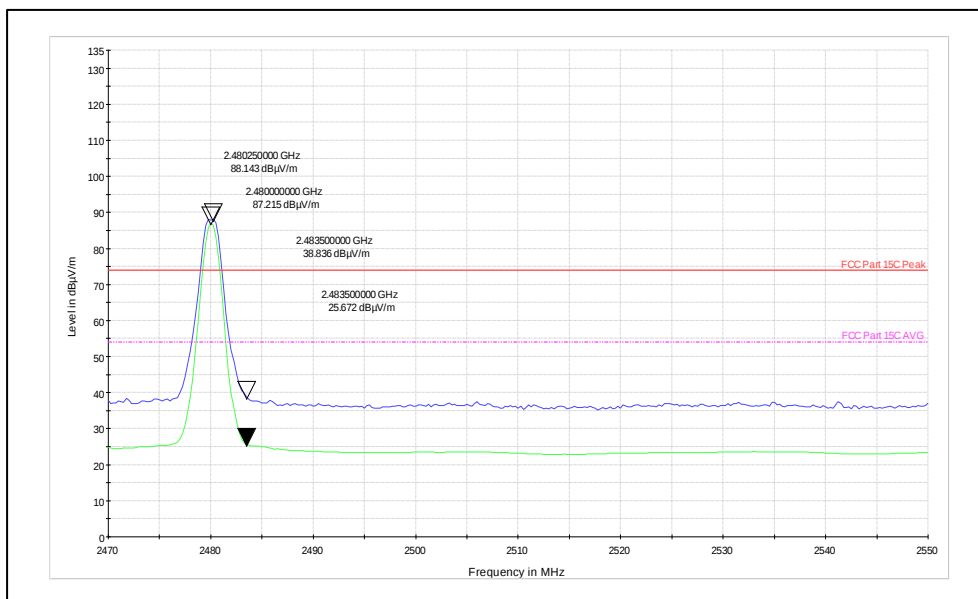

Channel Frequency: 2480MHz

Polarization: Vertical

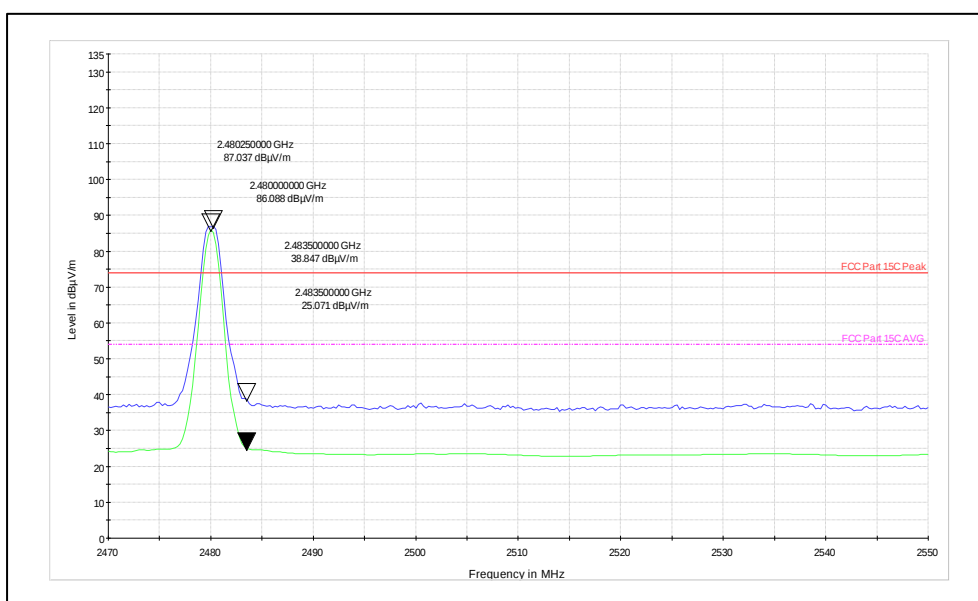

Channel Frequency: 2480MHz

Polarization: Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001


Seite 62 von 74

Page 62 of 74

Spurious Radiated emission:


Data Rate: 1Mbps

Channel frequency: 2402MHz

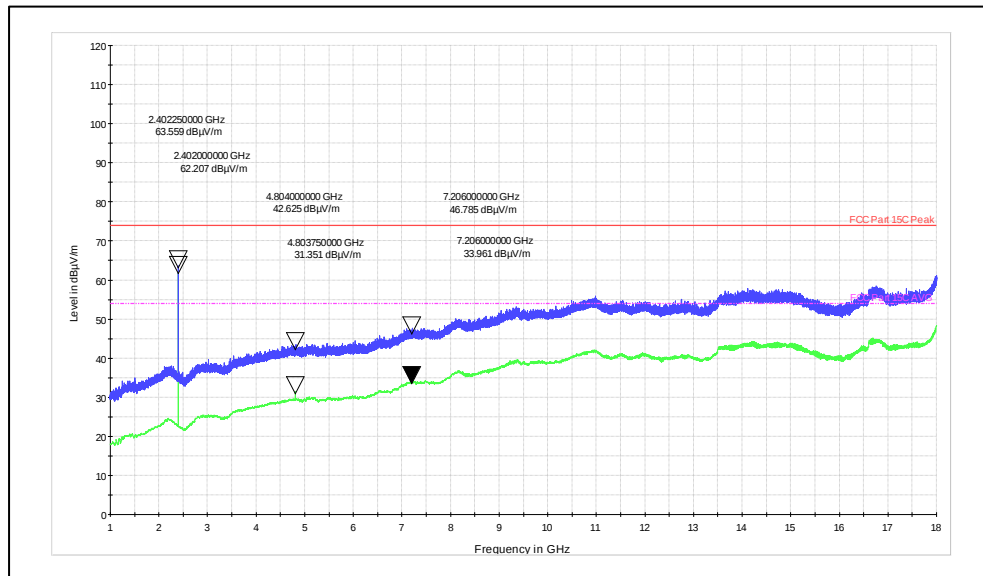

Polarization: Vertical

Frequency range: 1GHz to 18GHz

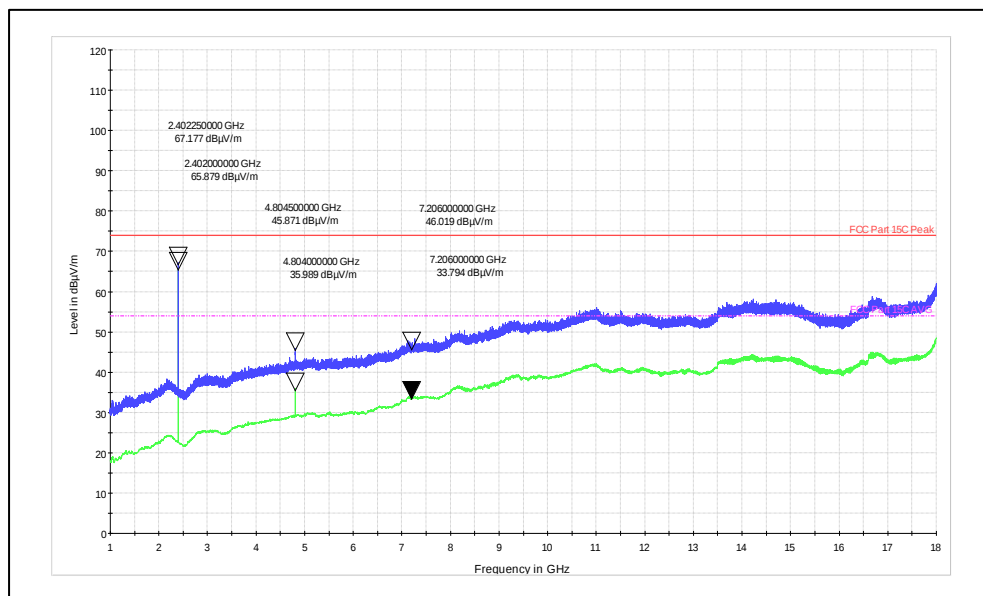

Polarization: Horizontal


Frequency range: 1GHz to 18GHz

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 63 von 74
Page 63 of 74

Channel frequency: 2440MHz

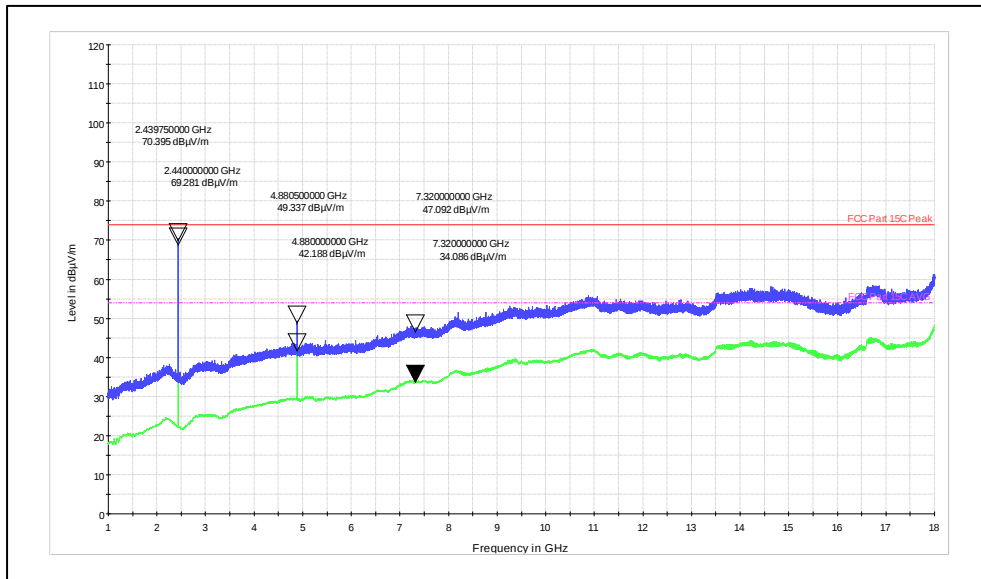

Polarization: Vertical

Frequency range: 1GHz to 18GHz

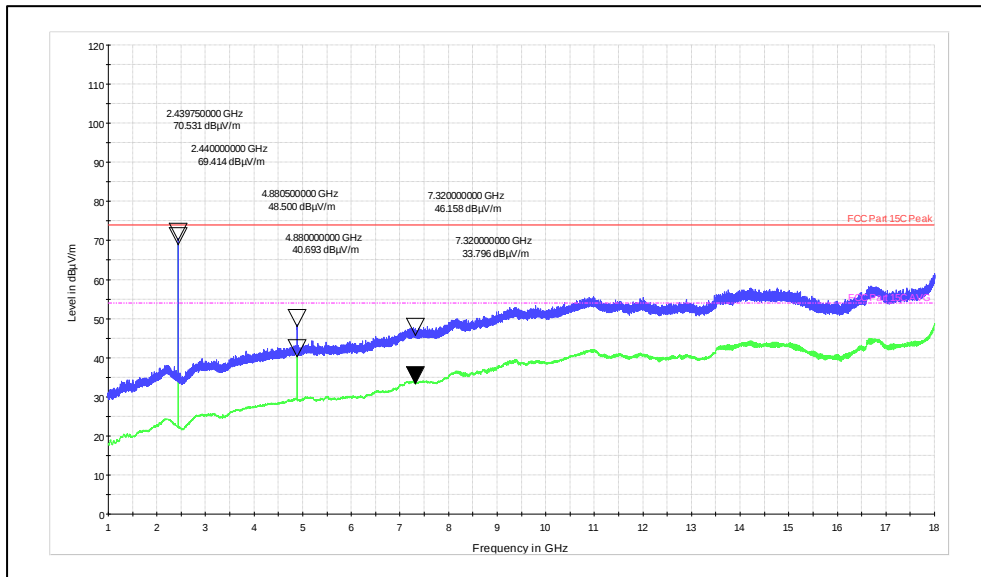

Polarization: Horizontal

Frequency range: 1GHz to 18GHz

Prüfbericht - Nr.:


Test Report No.:

IN25JD8U 001

Seite 64 von 74


Page 64 of 74

Channel frequency: 2480MHz

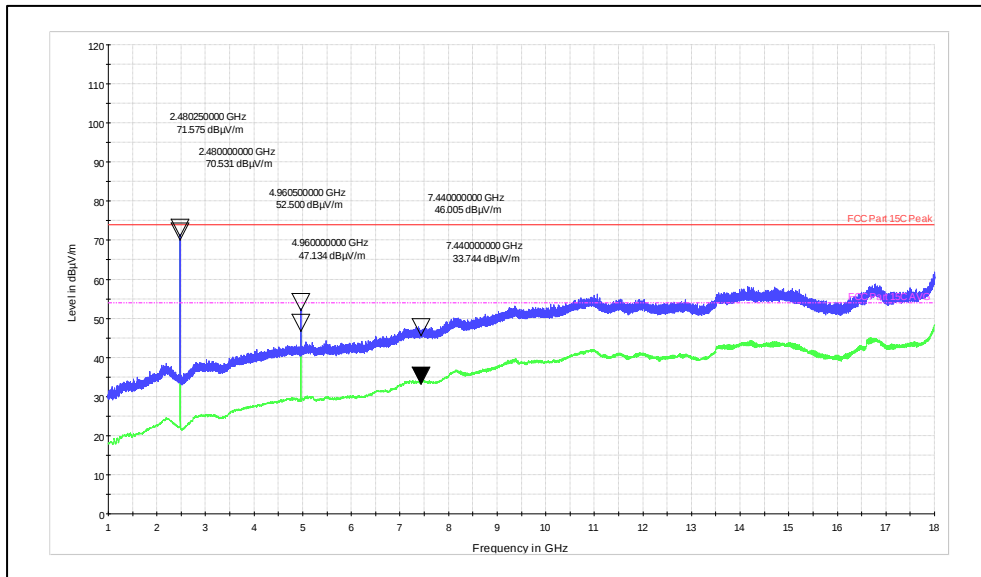

Polarization: Vertical

Frequency range: 1GHz to 18GHz

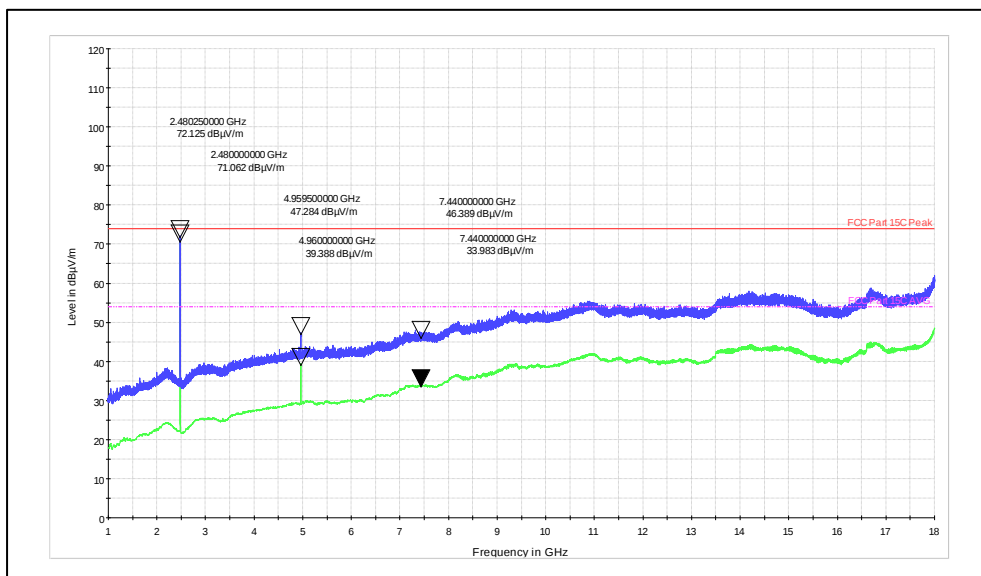

Polarization: Horizontal

Frequency range: 1GHz to 18GHz


Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 65 von 74
Page 65 of 74


Restricted Bands of Operation

Data Rate: 2Mbps

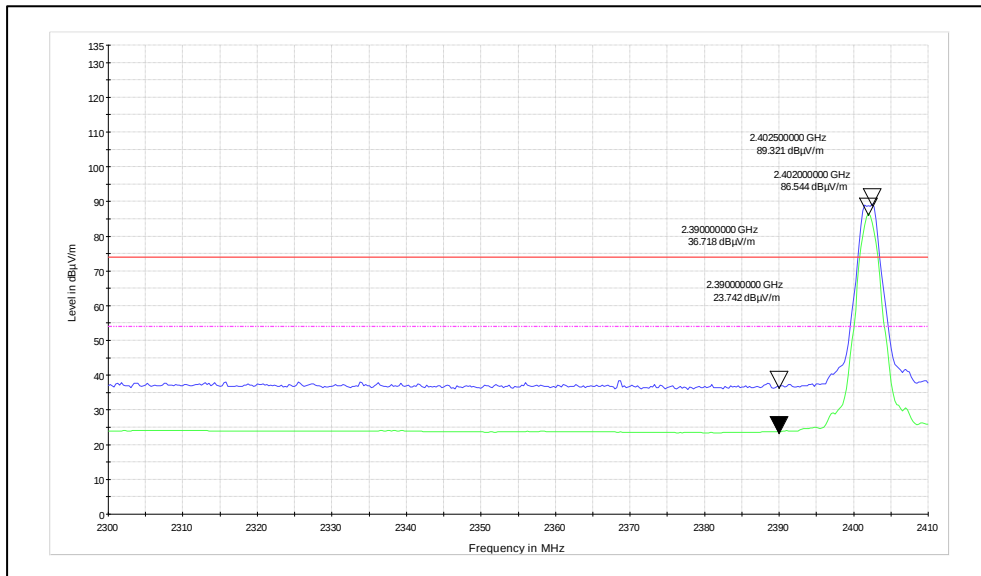


Channel frequency: 2402MHz

Polarization: Vertical

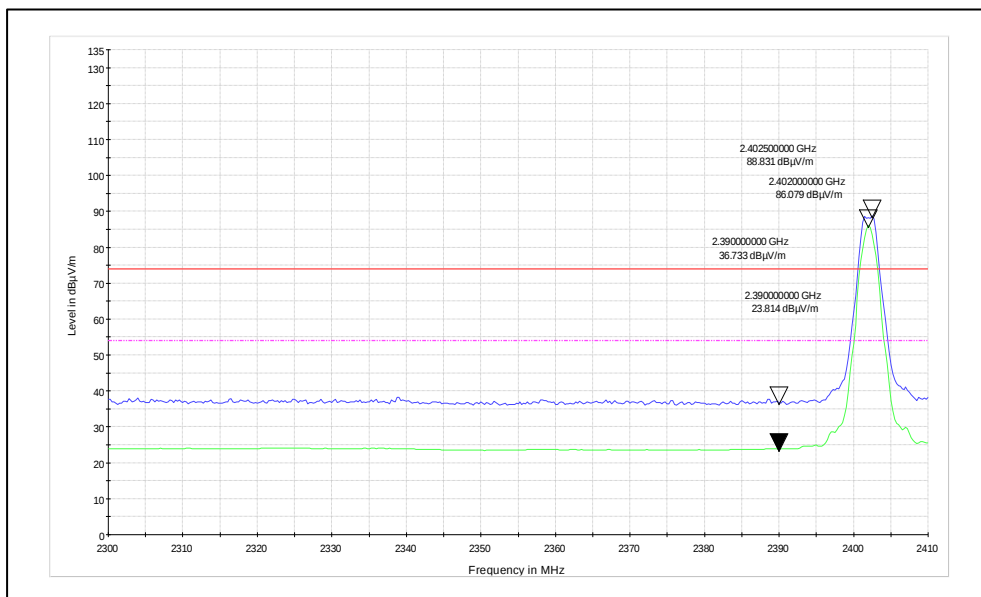


Channel frequency: 2402MHz

Polarization: Horizontal

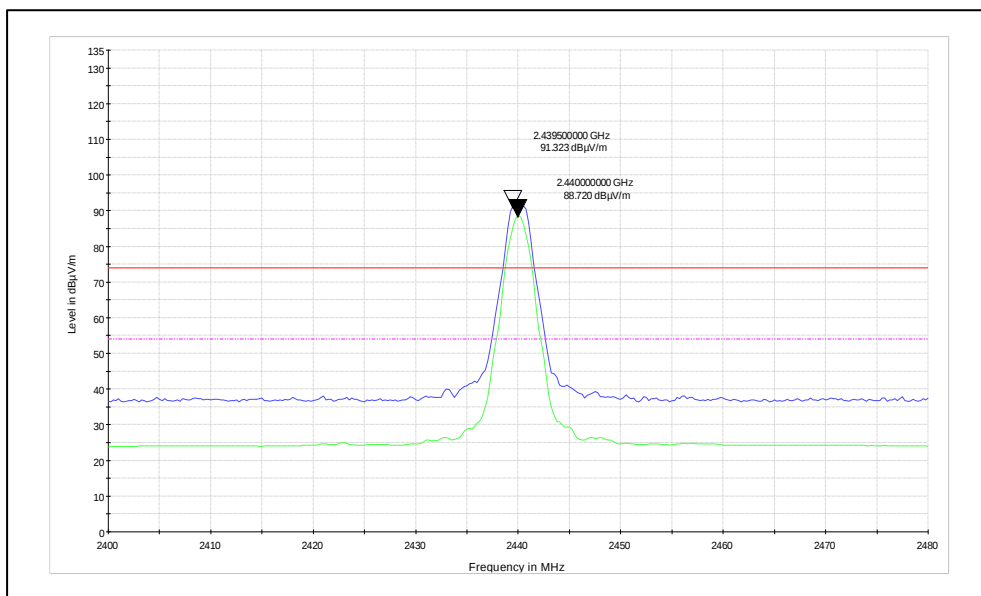


Channel frequency: 2440MHz

Polarization: Vertical

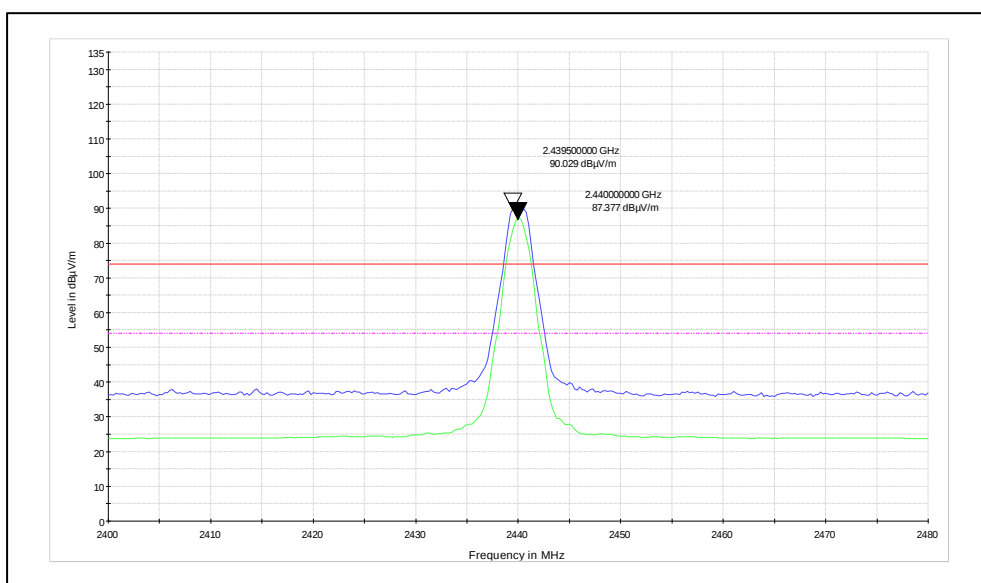


Channel frequency: 2440MHz

Polarization: Horizontal

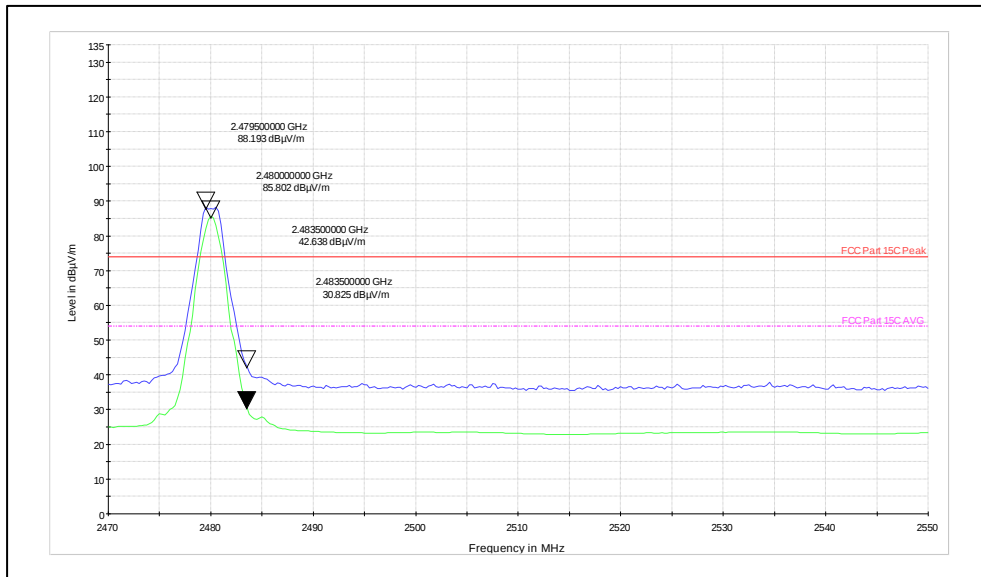

Channel frequency: 2480MHz

Polarization: Vertical

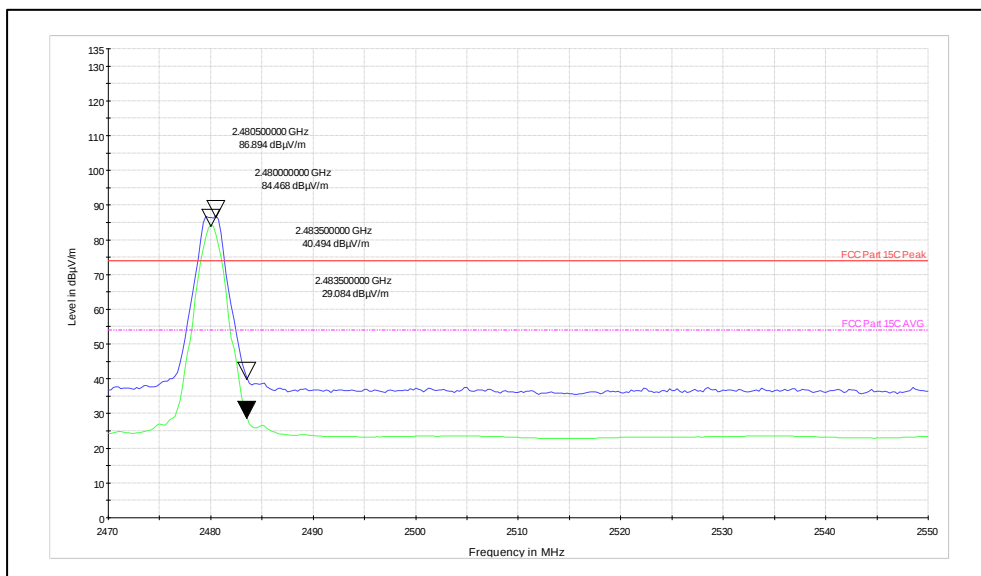

Channel frequency: 2480MHz


Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 68 von 74
Page 68 of 74

Channel frequency: 2402MHz

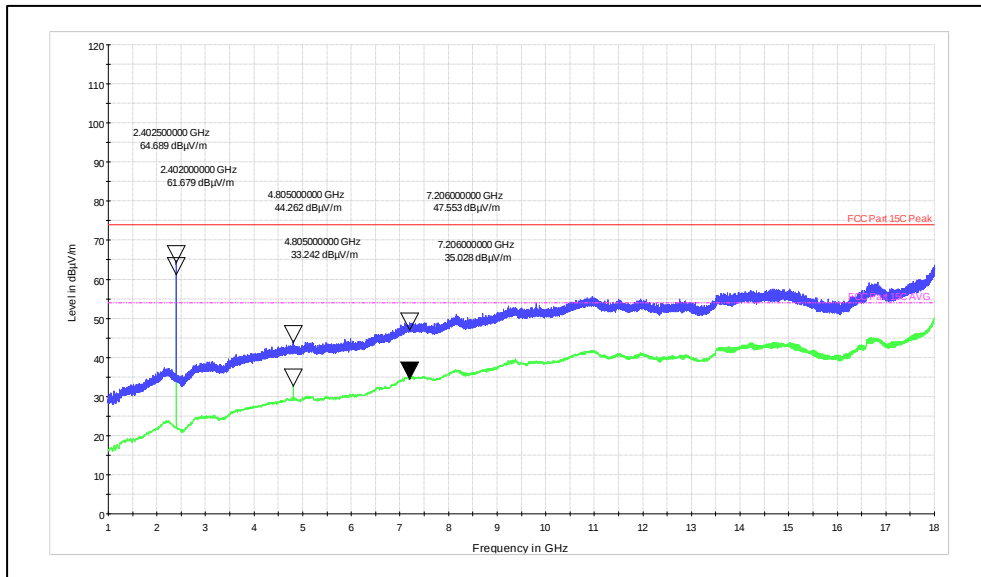

Frequency range: 1GHz to 18GHz

Polarization: Vertical

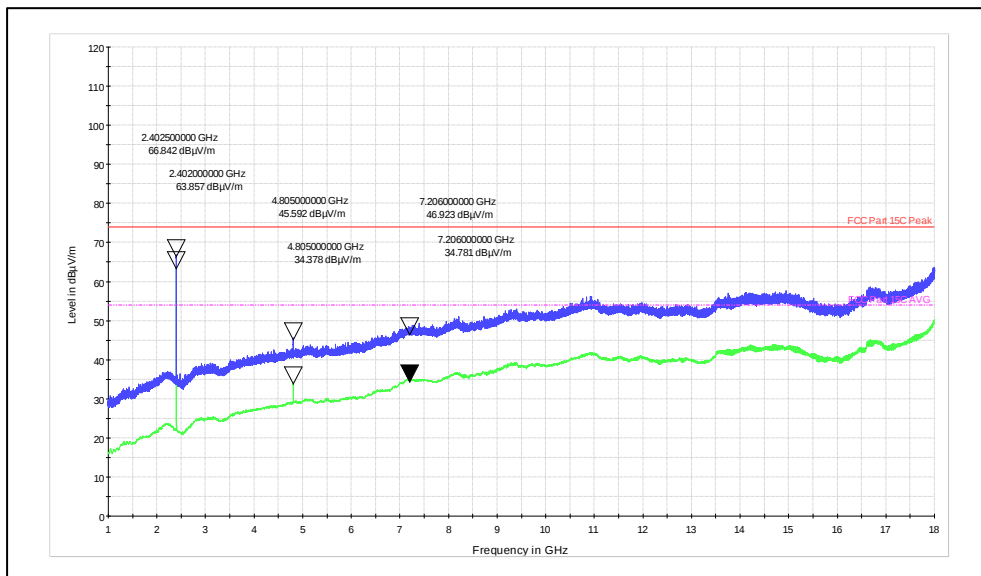

Frequency range: 1GHz to 18GHz


Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 69 von 74
Page 69 of 74

Channel frequency: 2440MHz

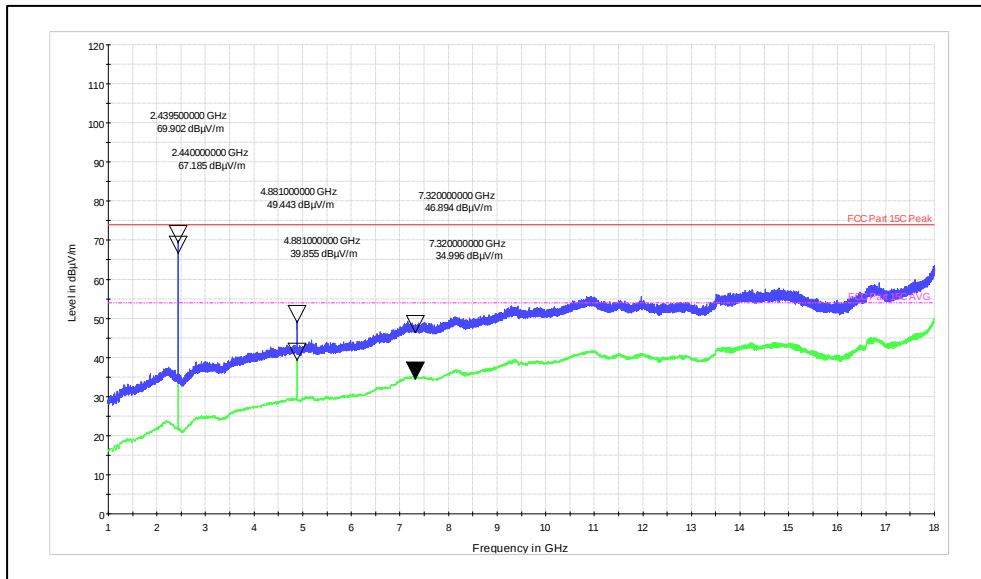

Frequency range: 1GHz to 18GHz

Polarization: Vertical

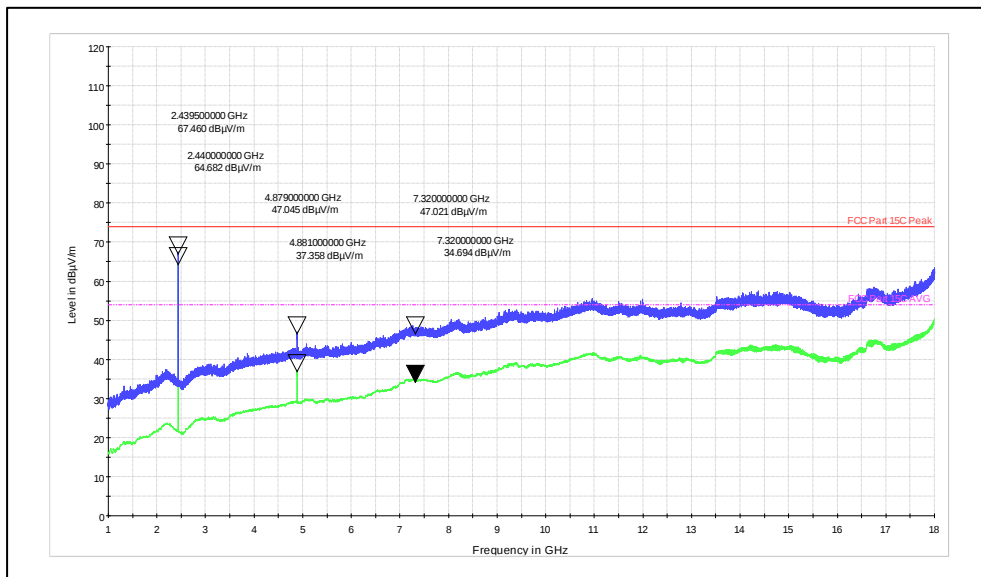

Frequency range: 1GHz to 18GHz


Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001


Seite 70 von 74
Page 70 of 74

Channel Frequency: 2480MHz

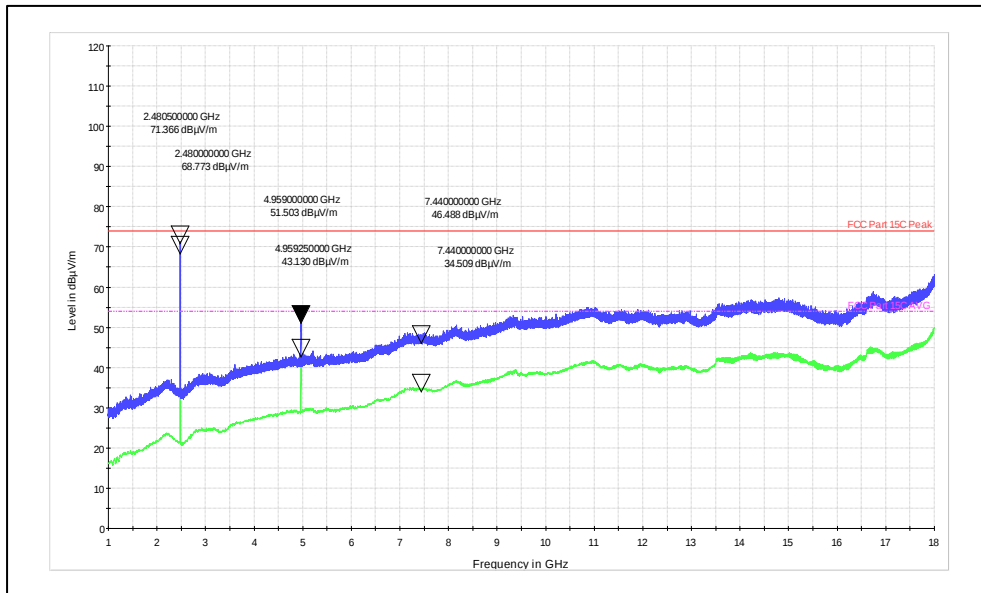

Frequency range: 1GHz to 18GHz

Polarization: Vertical

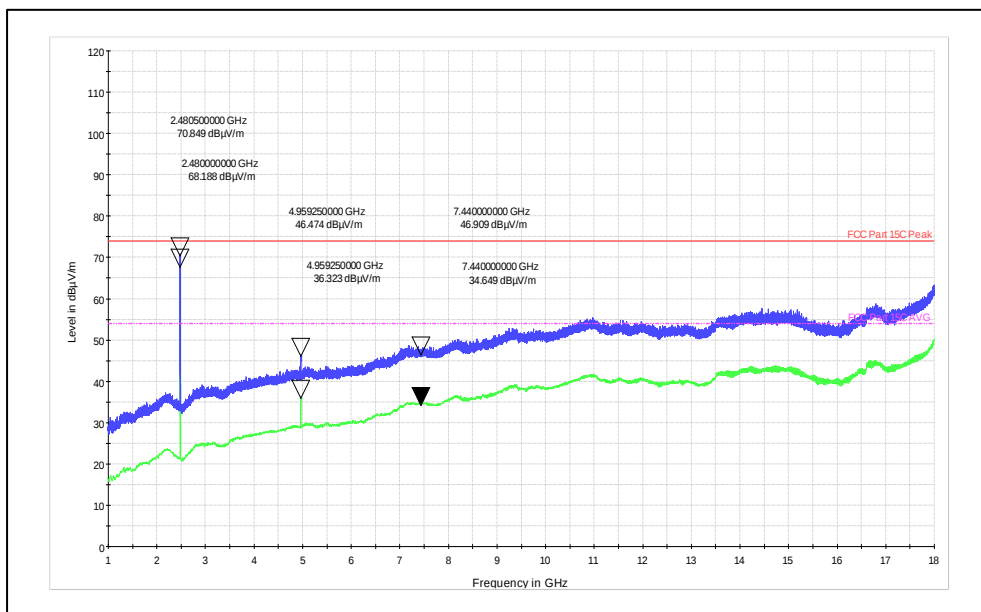

Frequency range: 1GHz to 18GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN25JD8U 001

Seite 71 von 74
Page 71 of 74

7.6 AC Power lines Conducted Emission

Result

Pass

Test Specification : FCC Part 15 Section 15.207/RSS Gen Issue 5 Section 8.8
Test Method : ANSI C 63.10-2013
Testing Location : Screened room
Measurement Bandwidth : 9kHz
Frequency Range : 150kHz – 30MHz
Supply Voltage : 110VAC,60Hz
Test Method : Refer TEST METHODOLOGY

Table 10: Limits for Conducted power line emission

Frequency of emission (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency

Prüfbericht - Nr.:

Test Report No.:

IN25JD8U 001

Seite 72 von 74

Page 72 of 74

Test Conditions:


Temperature (Norm) = +22.3°C

Voltage = 110VAC through AC-DC Adapter

Relative humidity: 57%

Test results:

110VAC-60Hz-Line

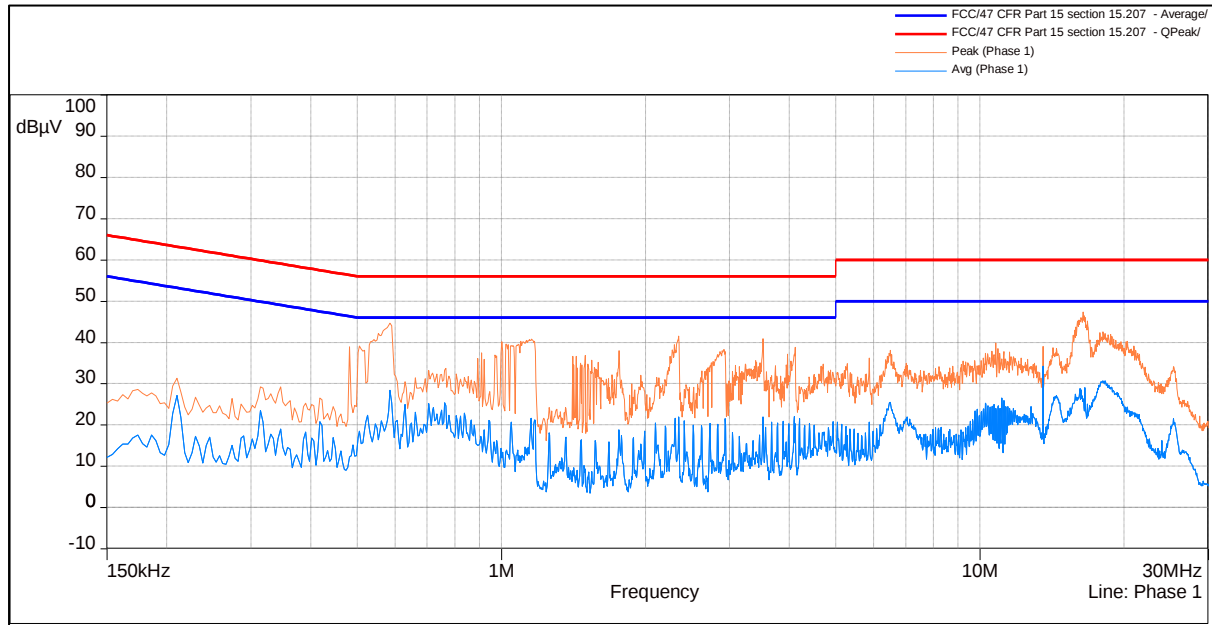

Quasi Peak:

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Comments
0.58645	43.74	56	-12.26	Pass
2.34505	40.39	56	-15.61	Pass
3.5188	39.68	56	-16.32	Pass
16.40485	40.74	60	-19.26	Pass
1.76105	36.08	56	-19.92	Pass
1.1427	35.56	56	-20.44	Pass
6.49165	29.1	60	-30.9	Pass

Average:

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Comments
0.58645	27.75	46	-18.25	Pass
16.40485	27.34	50	-22.66	Pass
2.34505	23.23	46	-22.77	Pass
3.5188	21.92	46	-24.08	Pass
1.76105	19.67	46	-26.33	Pass
6.49165	22.23	50	-27.77	Pass
1.1427	13.99	46	-32.01	Pass

Prüfbericht - Nr.:


Test Report No.:

IN25JD8U 001

Seite 73 von 74

Page 73 of 74

110VAC-60Hz-Neutral:

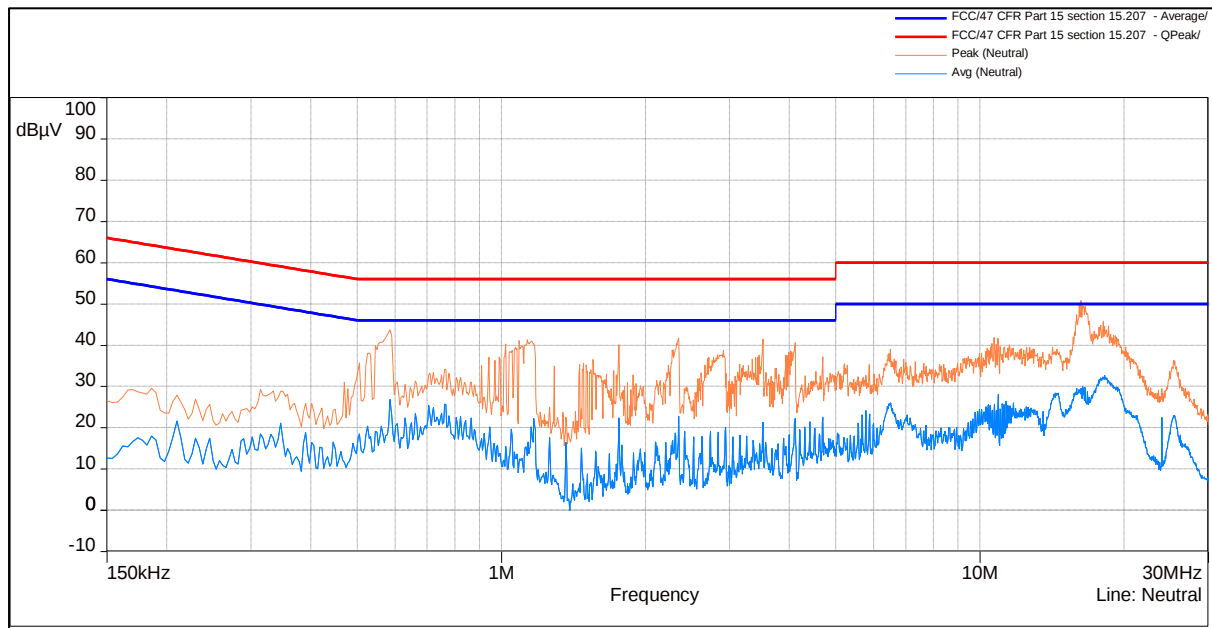

Quasi peak:

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Comments
0.58645	42.65	56	-13.35	Pass
2.34505	40.94	56	-15.06	Pass
3.51615	40.37	56	-15.63	Pass
16.28705	41.59	60	-18.41	Pass
1.75885	37.22	56	-18.78	Pass
4.0974	35.21	56	-20.79	Pass
1.10845	34.15	56	-21.85	Pass

Average:

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Comments
0.58645	24.94	46	-21.06	Pass
2.34505	23.68	46	-22.32	Pass
16.28705	27.28	50	-22.72	Pass
3.51615	23.11	46	-22.89	Pass
1.75885	20.5	46	-25.5	Pass
4.0974	18.74	46	-27.26	Pass
1.10845	12.79	46	-33.21	Pass

8 LIST OF TABLES

Table 1: List of test and measurement instruments	7
Table 2: Instrument application Software versions	7
Table 3: Ratings and System Details as declared by Client*	8
Table 4: Measurement Uncertainty	9
Table 5: List of BLE Centre frequencies	10
Table 6: Transmitter limits for Radiated emission	49
Table 7: Test results for frequency range 30MHz – 200MHz	50
Table 8: Test results for frequency range 200MHz – 1GHz	51
Table 9: Test results for the frequencies above 1GHz:	55
Table 10: Limits for Conducted power line emission	71

9 List of Figures

Figure 1: Frequency Range 9 kHz- 30 MHz	14
Figure 2: Frequency Range 30 MHz – 200 MHz	14
Figure 3: Frequency Range 200 MHz - 1GHz	15
Figure 4: Frequency Range above 1 GHz	15

End of test report