LTA
Laboratory for Test & Approval Co.,Ltd.
4, Songjuro236Beon-gil, Yangji-myeon, Cheoin-gu Yong-in-si,
Gyeonggi-do, Korea 17159
Tel: +82-31-323-6008 Fax: +82-31-323-6010
http://www.ltalab.com

Dates of Tests: May 25,2022 ~ June 16, 2022
Test Report S/N: LR500112206M
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID. **W6YHP200**

APPLICANT **PASSTECH CO., LTD.**

Manufacturing Description	:	**HOTEL DOOR LOCK**
Manufacturer	:	**PASSTECH CO., LTD.**
Model name	:	**HP200**
Variant Model name	:	**HP200N, HP200N-01,HP200N-02,HP200N-03 HP200-01,HP200-02,HP200-03**
Test Device Serial No.:	:	**Identical prototype**
Rule Part(s)	:	**FCC Part 15 Subpart C ; ANSI C63.10 - 2013**
Frequency Range	:	**13.56 MHz**
Data of issue	:	**June 16, 2022**

This test report is issued under the authority of:

JaBeom.Koo

Ja-Beom Koo, Manager

The test was supervised by:

Jae-Humm Yeon, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP LAB Code.: 200723-0

Copyright © 2022, LTA Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION ---------- 3

2. INFORMATION ABOUT TEST ITEM ---------- 4

3. TEST REPORT ---------- 5

3.1 SUMMARY OF TESTS ---------- 5

3.2 TECHNICAL CHARACTERISTICS TEST ---------- 6

3.2.1 Radiated Emission ---------- 6

3.2.2 Frequency Tolerance ---------- 11

3.2.3 20dB Bandwidth ---------- 12

3.2.4 AC Conducted Emissions ---------- 14

APPENDIX

APPENDIX TEST EQUIPMENT USED FOR TESTS ---------- 15

Copyright © 2022, LTA Co., Ltd.

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
Address : 243, Jubug-ri,Yangji-Myeon,Youngin-Si, Kyunggi-Do, Korea. 17159
Web site : http://www.ltalab.com
E-mail : chahn@ltalab.com
Telephone : +82-31-323-6008
Facsimile +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competents of calibration and testing laboratory".

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2022-09-28	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2023-01-25	FCC CAB
VCCI	JAPAN	C-4948,	2023-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2023-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2023-08-15	VCCI registration
VCCI	JAPAN	G-847	2022-12-13	VCCI registration
IC	CANADA	5799A-1	2022-10-18	IC filing

Copyright © 2022, LTA Co., Ltd.

2. Information about test item

2-1 Client & Manufacturer

Client Company name	:	PASSTECH CO., LTD.
Address	:	B-402, 215 Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, South Korea 13217
Tel / Fax	:	+82-31-743-7277 / +82-31-743-7276
Manufacturer		PASSTECH CO., LTD.
Address		B-402, 215 Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, South Korea 13217
Tel / Fax		+82-31-743-7277 / +82-31-743-7276

2-2 Equipment Under Test (EUT)

Model name	:	HP200
Variant Model name	:	HP200N, HP200N-01,HP200N-02,HP200N-03 HP200-01,HP200-02,HP200-03
Serial number	:	Identical prototype
Date of receipt	:	May 25 ,2022
EUT condition	:	Pre-production, not damaged
Antenna type	:	Pattern Antenna
Frequency Range	:	13.56 MHz
Type of Modulation	:	FSK
Power Source	:	DC 6 V

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz) BLE		13.56	

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

Copyright © 2022, LTA Co., Ltd.

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.209 15.225(a)(b)(c)(d)	Radiated Emission	Radiated	C
15.225(e)	Frequency Tolerance		C
15.215(c)	20dB Bandwidth		C
15.207	AC Conducted Emissions	Conducted	N/A
15.203	Antenna requirement	-	C

N/A : This product is battery-enabled and excludes the test.

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.
The tests were performed according to the method of measurements prescribed in KDB No.558074.

→ Antenna Requirement
PASSTECH CO., LTD FCC ID: W6YHP200 unit complies with the requirement of §15.203.
The antenna type is Pattern Antenna

Copyright © 2022, LTA Co., Ltd.

3.2 Technical Characteristics Test

3.2.1 Radiated Spurious Emissions

Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

<u>The spectrum analyzer is set to:</u>

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 120 kHz (30 MHz ~ 1 GHz) VBW ≥ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Trace = max hold Detector function = peak

Sweep = auto

below 30 MHz

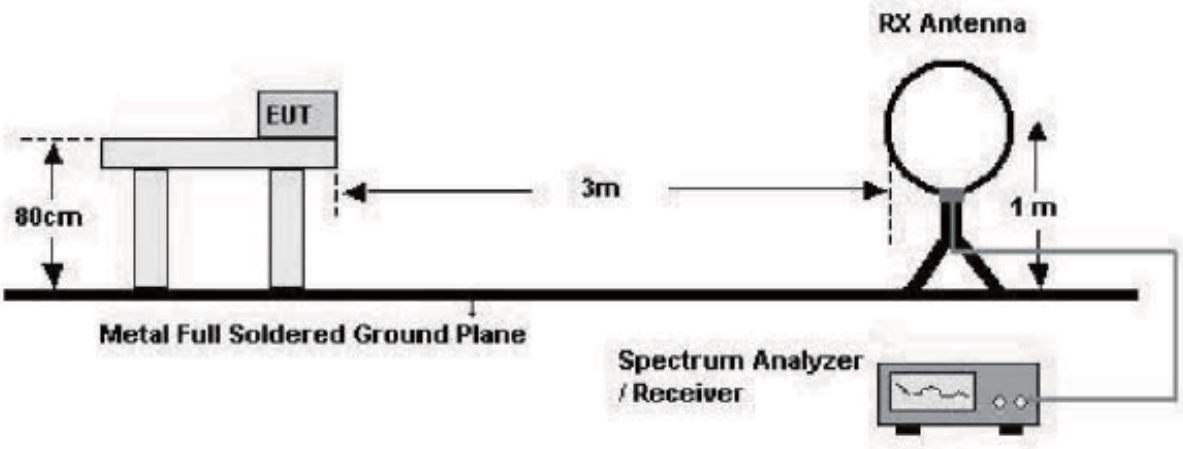

below 1 GHz (30 MHz to 1 GHz)

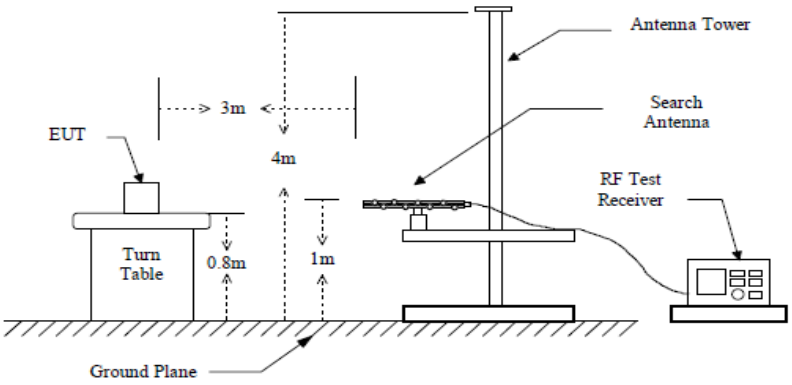

above 1 GHz

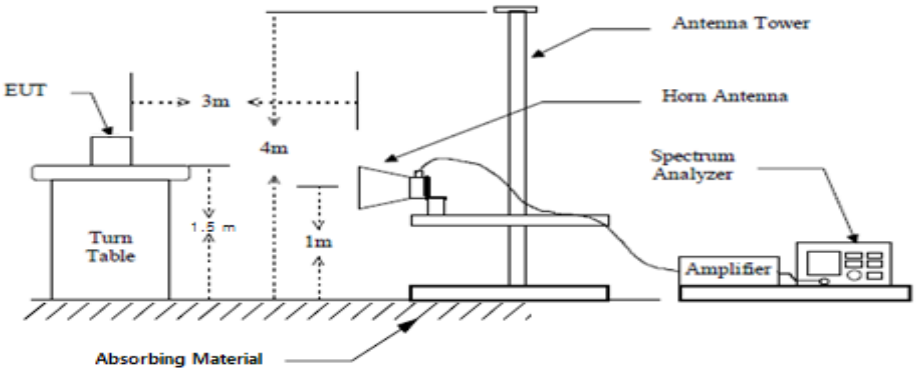

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.
- The test results for the worst of the various operating modes are presented in accordance with 6.3.4 of ANSI C63.10.
- Checked with a red circle is the fundamental frequency.

Copyright © 2022, LTA Co., Ltd.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) **(@ 300 m)**
0.490 ~ 1.705	24000/F(kHz) **(@ 30 m)**
1.705 ~ 30	30**(@ 30 m)**
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Copyright © 2022, LTA Co., Ltd.

Radiated Emissions

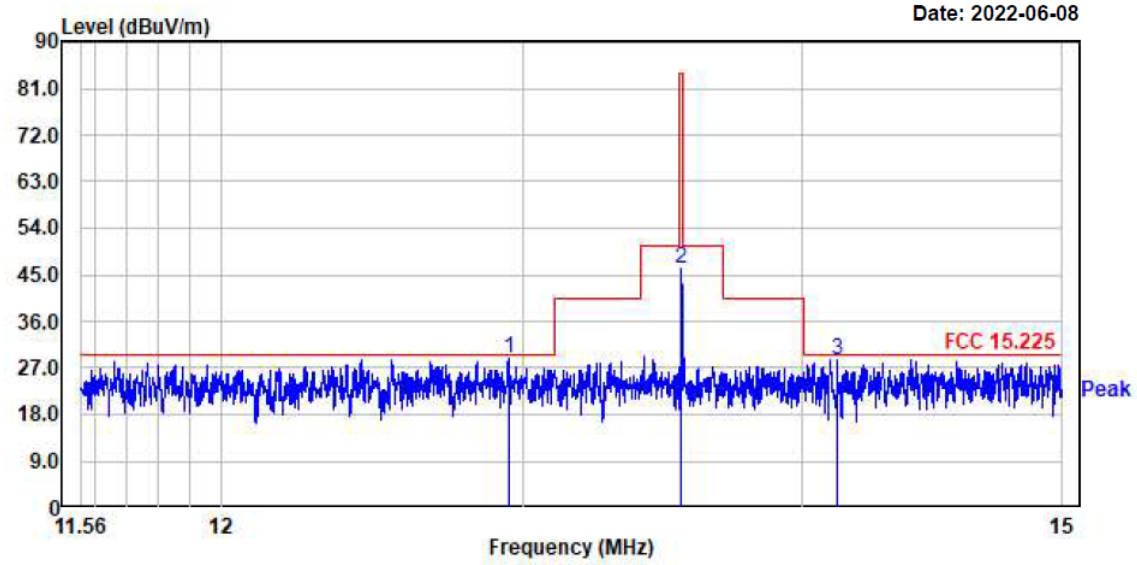

No.	Freq MHz	Reading dBµV	C.F dB	Result QP dBµV/m	Limit dBµV/m	Margin dB	Height cm	Angle deg	Polarity
1.	12.95	7.86	21.16	29.02	29.54	0.52	0	326	horizontal
2.	13.56	24.96	21.28	46.24	84.00	37.76	0	48	horizontal
3.	14.13	7.23	21.39	28.62	29.54	0.92	0	360	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

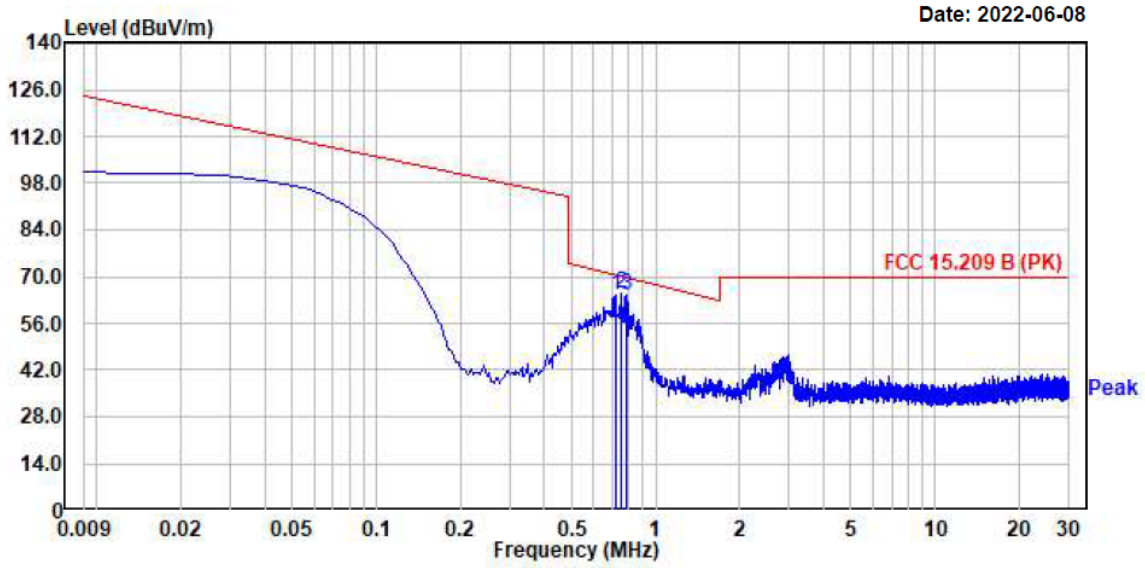

No.	Freq MHz	Reading dBµV	C.F dB	Result QP dBµV/m	Limit dBµV/m	Margin dB	Height cm	Angle deg	Polarity
1.	0.72	44.22	20.32	64.54	70.64	6.10	0	133	horizontal
2.	0.75	44.63	20.33	64.96	70.23	5.27	0	276	horizontal
3.	0.78	44.21	20.34	64.55	69.88	5.33	0	276	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Copyright © 2022, LTA Co., Ltd.

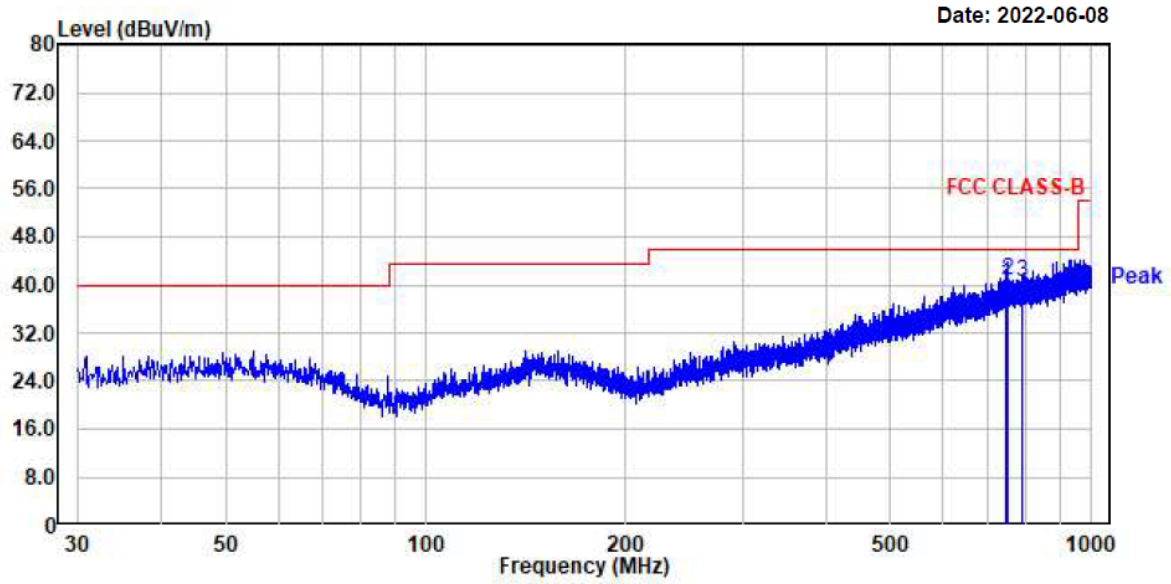

No.	Freq MHz	Reading dBµV	C.F dB	Result QP dBµV/m	Limit dBµV/m	Margin dB	Height cm	Angle deg	Polarity
1.	747.19	12.27	27.87	40.14	46.00	5.86	100	356	horizontal
2.	748.89	12.87	27.88	40.75	46.00	5.25	100	193	horizontal
3.	788.66	12.30	28.14	40.44	46.00	5.56	100	356	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

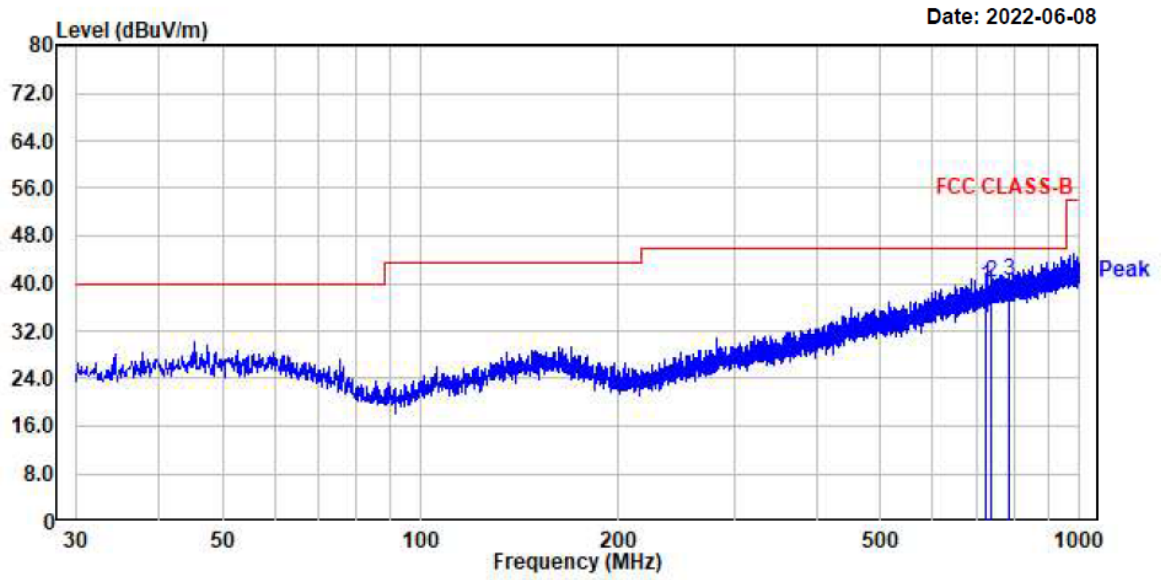

No.	Freq MHz	Reading dBµV	C.F dB	Result QP dBµV/m	Limit dBµV/m	Margin dB	Height cm	Angle deg	Polarity
1.	721.73	12.50	27.08	39.58	46.00	6.42	100	54	vertical
2.	738.34	12.41	27.66	40.07	46.00	5.93	100	356	vertical
3.	783.08	12.48	28.04	40.52	46.00	5.48	100	240	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Copyright © 2022, LTA Co., Ltd.

3.2.2 Frequency Tolerance

Procedure:

According to FCC section 15.225, the devices operating in the 13.553~13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of

-20°C to +50°C using an environmental chamber. The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Measurement Data : Complies

VOLTAGE (%)	Test Conditions		Fre. Dev. (Hz)	Deviation (%)	Verdict
	Power (VDC)	Temperature (°C)			
100	6	-20	159	0.0011	PASS
100		-10	186	0.0013	
100		0	132	0.0009	
100		50	88	0.0006	
85	5.1	20	193	0.0014	
115	6.9	50	198	0.0014	

Minimum Standard:

±0.01%

Measurement Setup

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT was measured by transmitter mode continuously.

Copyright © 2022, LTA Co., Ltd.

3.2.3 20 dB Bandwidth

Procedure:

According to FCC section 15.215(c), the 20dB bandwidth should be contained within the frequency band designated in the rule section under which the EUT is operated, it was measured with a spectrum analyzer connected the EUT while the EUT is operating in transmission mode.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1 kHz

VBW = 3 X RBW

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : Complies

BLE Mode

Frequency (MHz)	Test Results	
	Measured Bandwidth (kHz)	Result
13.56	**2.749**	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

20 dB Bandwidth ≤ 14 kHz

Measurement Setup

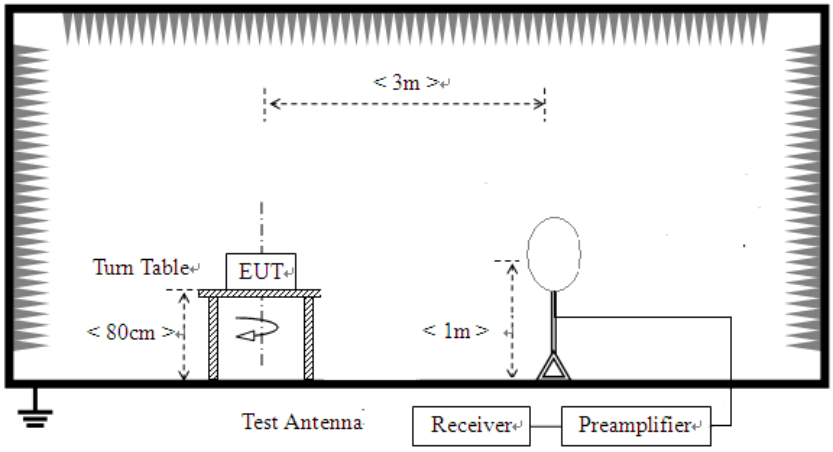

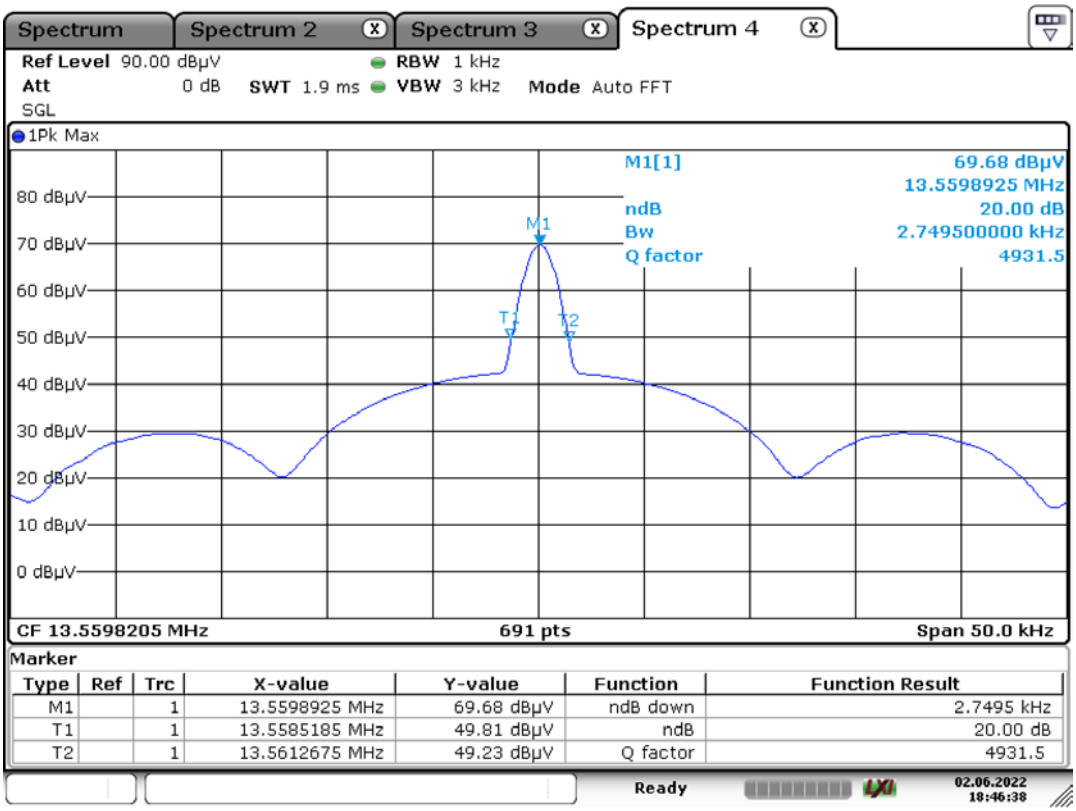

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	13.5598925 MHz	69.68 dBµV	ndB down	2.7495 kHz
T1		1	13.5585185 MHz	49.81 dBµV	ndB	20.00 dB
T2		1	13.5612675 MHz	49.23 dBµV	Q factor	4931.5

Date: 2.JUN.2022 18:46:38

3.2.4 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: N/A

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Copyright © 2022, LTA Co., Ltd.

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2022-09-06
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2023-03-16
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2023-03-16
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2022-09-06
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2022-09-06
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2022-09-06
7		RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2022-09-06
8		RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2023-03-16
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2022-09-06
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2024-03-18
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2024-03-18
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2023-03-20
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2023-03-16
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2023-03-16
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2022-09-06
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2022-09-06
20		Moduleation Analyzer	8901B	3749A05878	HP	1 year	2022-09-06
21		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2022-09-06
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2023-03-18
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2022-09-06
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2023-03-16
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2023-03-16
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2023-03-16
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2023-03-16
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2023-03-16
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2023-03-16
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2023-03-16
31	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2023-02-26

Copyright © 2022, LTA Co., Ltd.