



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822  
Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>

Dates of Tests: February 12 ~ 25, 2016  
Test Report S/N: LR500111603B  
Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID

**W6YPT300**

APPLICANT

**PASSTECH CO., LTD**

**FCC Classification** : **Part 15 Low Power Communication Device Transmitter**  
**Manufacturing Description** : **LOCKER LOCK**  
**Manufacturer** : **PASSTECH CO., LTD**  
**Model name** : **ZP100WR**  
**Test Device Serial No.:** : **Identical prototype**  
**Rule Part(s)** : **FCC Part 15.225 Subpart C; ANSI C-63.4-2014**  
**Frequency Range** : **13.56 MHz**  
**RF power** : **59.12 dBuV/m @ 3m**  
**Data of issue** : **March 4, 2016**

This test report is issued under the authority of:

Yong-Cheol, Wang / Manager

The test was supervised by:

Young-jin Lee, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

---

## **TABLE OF CONTENTS**

|                                        |    |
|----------------------------------------|----|
| 1. GENERAL INFORMATION                 | 3  |
| 2. INFORMATION ABOUT TEST ITEM         | 4  |
| 3. TEST REPORT                         | 5  |
| 3.1 SUMMARY OF TESTS                   | 5  |
| 3.2 TRANSMITTER REQUIREMENTS           | 6  |
| 3.2.1 ELECTRIC FIELD STRENGTH          | 6  |
| 3.2.1.1 FUNDAMENTAL EMISSION           | 7  |
| 3.2.1.2 OUTSIDE the EMISSION           | 8  |
| 3.2.1.3 SPURIOUS EMISSION              | 9  |
| 3.2.1.4 Emission Bandwidth             | 10 |
| 3.2.2 FREQUENCY TOLERANCE              | 12 |
| 3.2.6 AC Conducted Emissions           | 13 |
| <br><b>APPENDIX</b>                    |    |
| APPENDIX TEST EQUIPMENT USED FOR TESTS | 14 |

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

| Agency | Country | Accreditation No.  | Validity   | Reference             |
|--------|---------|--------------------|------------|-----------------------|
| NVLAP  | U.S.A   | 200723-0           | 2016-09-30 | ECT accredited Lab.   |
| RRA    | KOREA   | KR0049             | -          | EMC accredited Lab.   |
| FCC    | U.S.A   | 610755             | 2017-04-21 | FCC filing            |
| FCC    | U.S.A   | 649054             | 2017-04-13 | FCC CAB               |
| VCCI   | JAPAN   | R2133(10 m), C2307 | 2017-06-21 | VCCI registration     |
| VCCI   | JAPAN   | T-2009             | 2016-12-23 | VCCI registration     |
| VCCI   | JAPAN   | G-563              | 2018-12-13 | VCCI registration     |
| IC     | CANADA  | 5799A-1            | UPDATING   | IC filing             |
| KOLAS  | KOREA   | NO.551             | 2017-01-08 | KOLAS accredited Lab. |

## 2. Information about test item

### 2-1 Client& Manufacturer

Company name : PASSTECH CO., LTD  
Address : No. B-402, Geumgang Penterium IT Tower, 215, Galmachi-ro, Jungwon-gu,  
Seongnam-si, Gyeonggi-do, 13217 Rep. of KOREA  
Tel / Fax : TEL No : +82-31-743-7277 / FAX No : +82-31-743-7276

### 2-2 Equipment Under Test (EUT)

Trade name : LOCKER LOCK  
Model name : ZP100WR  
Serial number : Identical prototype  
Date of receipt : January 26, 2016  
EUT condition : Pre-production, not damaged  
Antenna type : Mag Integrated Loop Antenna  
Frequency Range : 13.56 MHz  
RF output power : 59.12 dBuV/m @ 3m  
Power Source : DC 6V by Battery  
Firmware Version : V 1.0.0

### 2-3 Tested frequency

|                 | LOW | MID   | HIGH |
|-----------------|-----|-------|------|
| Frequency (MHz) | -   | 13.56 | -    |

### 3. Test Report

#### 3.1 Summary of tests

| FCC Part Section(s) | Parameter                                      | Test Condition | Status (note 1) |
|---------------------|------------------------------------------------|----------------|-----------------|
| 15.225(a)           | Electric Field Strength - Fundamental Emission | Radiated       | C               |
| 15.225(b) (c)       | Electric Field Strength - Outside the Band     |                | C               |
| 15.225(d) / 15.209  | Electric Field Strength - Spurious Emission    |                | C               |
| 15.225(e)           | Frequency Tolerance                            |                | C               |
| 15.215(c)           | 20 dB Bandwidth                                |                | C               |
| 15.207 /15.107      | AC Conducted Emissions                         | Line Conducted | N/A             |

Note 1: C=Complies    NC=Not Complies    NT=Not Tested    NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.225; ANSI C-63.4-2014

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013).

## 3.2 Transmitter requirements

### 3.2.1 Electric Field Strength

#### **Procedure:** About the Fundamental Emission, Outside the Band and Spurious Emission

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m.

→ From 9 kHz to 30 MHz at distance 3 m

The EUT was placed on a non-conductive table located on a large open test site.

The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna and with x, y, z planes in EUT.

→ From 30 MHz to 1000 MHz at distance 3 m

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10-2013

Bandwidth settings per frequency range;

|              | From 9 kHz to 150 kHz | From 150 kHz to 30 MHz | From 30 MHz to 1000 MHz |
|--------------|-----------------------|------------------------|-------------------------|
| IF Bandwidth | 200 Hz                | 9 kHz                  | 120 kHz                 |

Part 15 Section 15.31 (f)(2) (9 kHz ~ 30 MHz)

9 ~ 490 kHz [Limit at 3 m] = [Limit at 300 m]-20log(3[m]/300[m])

490 kHz ~ 30 MHz [Limit at 3 m] = [Limit at 30 m]-20log(3[m]/30[m])

### 3.2.1.1 Electric Field Strength - Fundamental Emission

Test method : Part 15.225(a)  
 Tx Frequency : 13.56 MHz  
 Result : **Complies**

#### Measurement data:

| Freq<br>(MHz) | Pol. | Reading<br>(dB $\mu$ V/m) | T.F<br>(dB) | Field Strength<br>@3 m<br>(dB $\mu$ V/m) | Limit @3 m<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|---------------|------|---------------------------|-------------|------------------------------------------|------------------------------|----------------|
| 13.56         | H    | 60.58                     | -2.95       | 57.63                                    | 104                          | 46.37          |
| 13.56         | V    | 62.07                     | -2.95       | 59.12                                    | 104                          | 44.88          |

-- Note 1--

Field strength of 13.553 MHz to 13.567 MHz Limit@3m = 84 dB $\mu$ V/m + 20log30 m/3 m  
 = 104 dB $\mu$ V/m

-- Note 2--


T.F(Total Factor) = Antenna Factor + Cable Loss – Amp Gain

Field Strength @3 m = Reading + T.F

### 3.2.1.2 Electric Field Strength - Outside the Allocated Band

Test method : Part 15.225(b) (c)  
Tx Frequency : 13.56 MHz  
Result : **Complies**

#### Measurement Data:

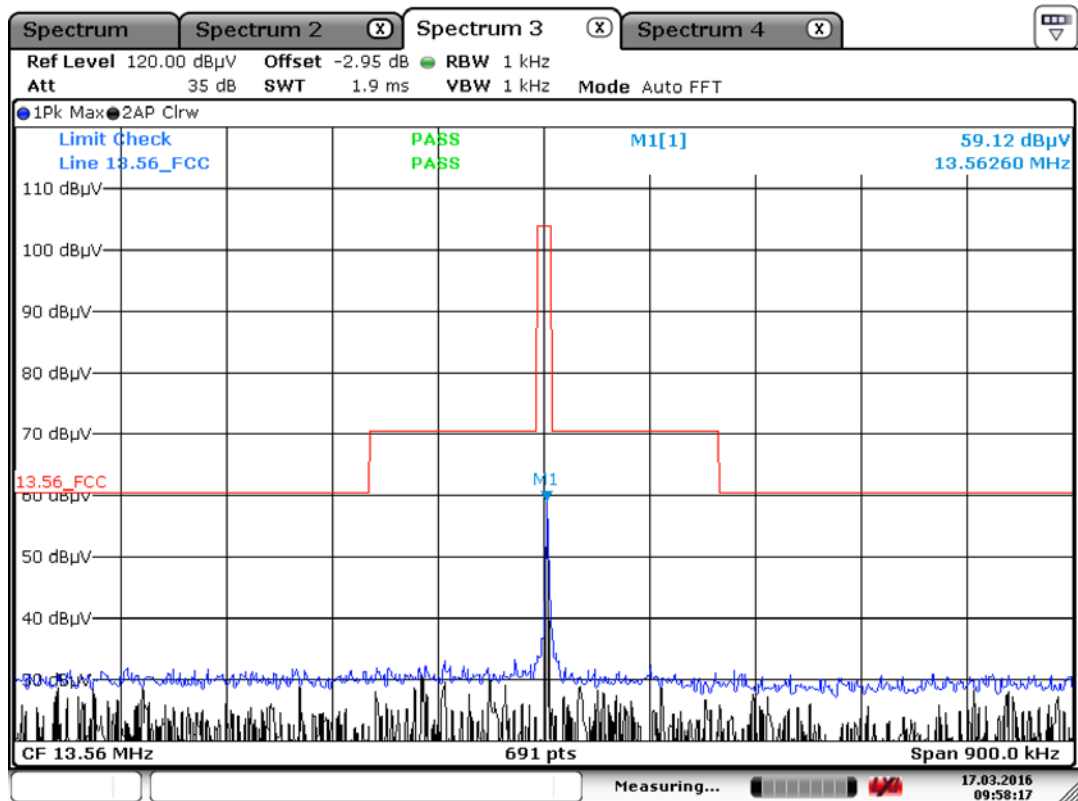

### 3.2.1.3 Electric Field Strength – Spurious Emission

Test method : Part 15.225(d) / Part 15.209  
 Tx Frequency : 13.56 MHz  
 Result : **Complies**

#### Measurement Data:

| Freq<br>(MHz) | Pol. | Reading<br>(dBμV/m) | T.F<br>(dB) | Field<br>Strength @<br>3 m<br>(dBμV/m) | Limit @3 m<br>(dBμV/m) | Margin<br>(dB) |
|---------------|------|---------------------|-------------|----------------------------------------|------------------------|----------------|
| 636.64        | V    | 31.08               | -4.12       | 26.96                                  | 46.40                  | 19.44          |
| 652.18        | H    | 33.26               | -3.43       | 29.83                                  | 46.40                  | 16.57          |
| 705.91        | H    | 39.48               | -1.94       | 37.54                                  | 46.40                  | 8.86           |
| 736.11        | H    | 38.12               | -0.91       | 37.21                                  | 46.40                  | 9.19           |
| 768.92        | H    | 40.55               | -0.16       | 40.39                                  | 46.40                  | 6.01           |
| 819.31        | H    | 30.20               | 0.79        | 30.99                                  | 46.40                  | 15.41          |
|               |      |                     |             |                                        |                        |                |
|               |      |                     |             |                                        |                        |                |
|               |      |                     |             |                                        |                        |                |
|               |      |                     |             |                                        |                        |                |
|               |      |                     |             |                                        |                        |                |

-- Note 1--

T.F(Total Factor) = Antenna Factor + Cable Loss –Amp Gain

Field Strength @3 m = Reading + T.F

-- Note 2--

No other emissions were detected at a level greater than 20 dB below limit.

### 3.2.1.4 Emission Bandwidth

Test method : Part 15.215 (c)  
Tx Frequency : 13.56 MHz  
Result : **Complies**

| Occupied Channel Bandwidth Result |                    |                          |                        |
|-----------------------------------|--------------------|--------------------------|------------------------|
| Modulation<br>Mode                | Frequency<br>(MHz) | 20 dB Bandwidth<br>(kHz) | 99% Bandwidth<br>(kHz) |
| ASK                               | 13.56              | 2.49                     | 2.08                   |
| Limit                             |                    | N/A                      | N/A                    |
| Result                            |                    | PASS                     |                        |



### 3.2.2 Frequency Tolerance

#### Procedure:

The temperature test was started after the temperature stabilization time of 30 minutes.

#### Requirement:


The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test method : ANSI C63.10-2013  
 Tx Frequency : 13.56 MHz  
 Result : **Complies**

#### Measurement Data:

OPERATING FREQUENCY: 13,562,600 Hz  
 Freq. Tolerance Limit:  $\pm 0.01$  %

| VOLTAGE<br>(%) | POWER<br>(VDC) | TEMP<br>(°C) | FREQ<br>(Hz) | Deviation<br>(%) |
|----------------|----------------|--------------|--------------|------------------|
| 100            | 6.00           | -20          | 13,562,581   | 0.000001         |
| 100            |                | -10          | 13,562,592   | 0.000001         |
| 100            |                | 0            | 13,562,622   | -0.000002        |
| 100            |                | 10           | 13,562,634   | -0.000003        |
| 100            |                | 20           | 13,562,626   | -0.000002        |
| 100            |                | 30           | 13,562,662   | -0.000005        |
| 100            |                | 40           | 13,562,663   | -0.000005        |
| 100            |                | 50           | 13,562,615   | -0.000001        |
| 85             | 5.10           | 20           | 13,562,627   | -0.000002        |
| 115            | 6.90           | 20           | 13,562,655   | -0.000004        |

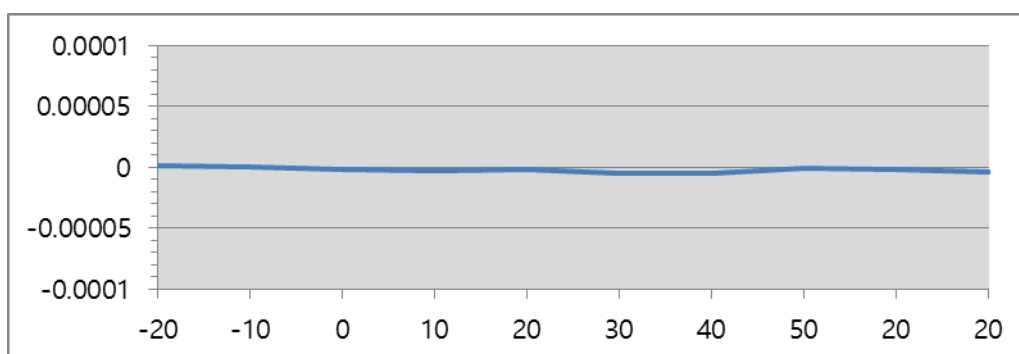

### 3.2.3 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Minimum Standard: FCC Part 15.207(a) / EN 55022

##### Class B

| Frequency Range | quasi-peak | Average    |
|-----------------|------------|------------|
| 0.15 ~ 0.5      | 66 to 56 * | 56 to 46 * |
| 0.5 ~ 5         | 56         | 46         |
| 5 ~ 30          | 60         | 50         |

\* Decreases with the logarithm of the frequency

## APPENDIX

### TEST EQUIPMENT USED FOR TESTS

|    | Description                          | Model No.        | Serial No.  | Manufacturer           | Interval | Last Cal. Date |
|----|--------------------------------------|------------------|-------------|------------------------|----------|----------------|
| 1  | Signal Analyzer (9 kHz ~ 30 GHz)     | FSV-30           | 100757      | R&S                    | 1 year   | 2015-03-24     |
| 2  | Signal Generator (~3.2 GHz)          | 8648C            | 3623A02597  | HP                     | 1 year   | 2015-03-23     |
| 3  | SYNTHESIZED CW GENERATOR             | 83711B           | US34490456  | HP                     | 1 year   | 2015-03-23     |
| 4  | Attenuator (3 dB)                    | 8491A            | 37822       | HP                     | 1 year   | 2015-09-14     |
| 5  | Attenuator (10 dB)                   | 8491A            | 63196       | HP                     | 1 year   | 2015-09-14     |
| 6  | Test Receiver (~30 MHz)              | ESHS10           | 828404/009  | R&S                    | 1 year   | 2015-03-23     |
| 7  | EMI Test Receiver (~7 GHz)           | ESCI7            | 100722      | R&S                    | 1 year   | 2015-09-15     |
| 8  | RF Amplifier (~1.3 GHz)              | 8447D OPT 010    | 2944A07684  | HP                     | 1 year   | 2015-09-14     |
| 9  | RF Amplifier (1~26.5 GHz)            | 8449B            | 3008A02126  | HP                     | 1 year   | 2015-03-23     |
| 10 | Horn Antenna (1~18 GHz)              | 3115             | 00114105    | ETS                    | 2 year   | 2015-04-21     |
| 11 | DRG Horn (Small)                     | 3116B            | 81109       | ETS-Lindgren           | 2 year   | 2014-02-26     |
| 12 | DRG Horn (Small)                     | 3116B            | 133350      | ETS-Lindgren           | 2 year   | 2014-02-26     |
| 13 | TRILOG Antenna                       | VULB 9160        | 9160-3237   | SCHWARZBECK            | 2 year   | 2015-04-21     |
| 14 | Temp.Humidity Data Logger            | SK-L200TH II A   | 00801       | SATO                   | 1 year   | 2015-04-03     |
| 15 | Splitter (SMA)                       | ZFSC-2-2500      | SF617800326 | Mini-Circuits          | -        | -              |
| 16 | Power Divider                        | 11636A           | 06243       | HP                     | 1 year   | 2015-09-14     |
| 17 | DC Power Supply                      | 6674A            | 3637A01657  | Agilent                | -        | -              |
| 18 | Frequency Counter                    | 5342A            | 2826A12411  | HP                     | 1 year   | 2015-03-23     |
| 19 | Power Meter                          | EPM-441A         | GB32481702  | HP                     | 1 year   | 2015-03-23     |
| 20 | Power Sensor                         | 8481A            | 3318A94972  | HP                     | 1 year   | 2016-01-05     |
| 21 | Audio Analyzer                       | 8903B            | 3729A18901  | HP                     | 1 year   | 2015-09-14     |
| 22 | Modulation Analyzer                  | 8901B            | 3749A05878  | HP                     | 1 year   | 2015-09-15     |
| 23 | TEMP & HUMIDITY Chamber              | YJ-500           | LTAS06041   | JinYoung Tech          | 1 year   | 2015-09-14     |
| 24 | Stop Watch                           | HS-3             | 812Q08R     | CASIO                  | 2 year   | 2014-04-03     |
| 25 | LISN                                 | KNW-407          | 8-1430-1    | Kyoritsu               | 1 year   | 2015-09-14     |
| 26 | Two-Lime V-Network                   | ESH3-Z5          | 893045/017  | R&S                    | 1 year   | 2015-03-23     |
| 27 | UNIVERSAL RADIO COMMUNICATION TESTER | CMU200           | 106243      | R&S                    | 1 year   | 2015-03-23     |
| 28 | Highpass Filter                      | WHKX1.5/15G-10SS | 74          | Wainwright Instruments | 1 year   | 2015-03-30     |
| 29 | Highpass Filter                      | WHKX3.0/18G-10SS | 118         | Wainwright Instruments | 1 year   | 2015-03-30     |
| 30 | Active Loop Antenna                  | FMZB1519         | 1519-031    | SCHWARZBECK            | 2 year   | 2016-01-12     |
| 31 | OSP120 BASE UNIT                     | OSP120           | 101230      | R&S                    | 1 year   | 2015-03-23     |
| 32 | Signal Generator(100 kHz ~ 40 GHz)   | SMB100A03        | 177621      | R&S                    | 1 year   | 2015-03-24     |
| 33 | Signal Analyzer (10 Hz ~ 40 GHz)     | FSV40            | 101367      | R&S                    | 1 year   | 2015-03-24     |