

**Engineering Test Report No. 2100222-01 Rev. A**

Report Date	March 9, 2021	
Manufacturer Name	California Eastern Laboratories	
Manufacturer Address	1253 N. Old Rand Road Wauconda, IL 600084	
Model No.	CMP4010	
Date Received	February 22, 2021	
Test Dates	February 22, 2021 through February 26, 2021	
Specifications	FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 Innovation, Science, and Economic Development Canada, RSS-247 Innovation, Science, and Economic Development Canada, RSS-GEN	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature	MARK E. LONGINOTTI	
Tested by	Mark E. Longinotti	
Signature	<i>Raymond J. Klouda</i>	
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	213847	

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 and RSS-GEN test specifications. The data presented in this test report pertains to the EUT on the test date(s) specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Table of Contents

1.	Report Revision History	3
2.	Introduction	4
2.1.	Scope of Tests	4
2.2.	Purpose	4
2.3.	Identification of the EUT	4
3.	Power Input	4
4.	Grounding	4
5.	Support Equipment	5
6.	Interconnect Leads	5
7.	Modifications Made to the EUT	5
8.	Modes of Operation	5
9.	Test Specifications	7
10.	Test Plan	8
11.	Deviation, Additions to, or Exclusions from Test Specifications	8
12.	Laboratory Conditions	8
13.	Summary	8
14.	Sample Calculations	8
15.	Statement of Conformity	9
16.	Certification	9
17.	Photographs of EUT	10
18.	Equipment List	12
19.	Block Diagram of Test Setup	13
20.	Transmitter Conducted Emissions Test (AC Mains)	14
21.	Antenna Port Conducted Emissions Tests	33
22.	Radiated Emissions Tests	501
23.	Scope of Accreditation	698

**This report shall not be reproduced, except in full,
without the written approval of Elite Electronic Engineering Inc.**

1. Report Revision History

Revision	Date	Description
–	10 MAR 2021	Initial Release of Engineering Test Report No. 2100222-01
A	07 APR 2021 By Mark Longinotti	- Changed Engineering Test Report No. from 2100222-01 to 2100222-01 Rev. A throughout the report. - Section 2.3: In the table “Antenna Gain (dBi)” was changed to: “Manufacturer Supplied# Antenna Gain (dBi)” and a footnote was added to the table: “# -Antenna gain is supplied by the manufacturer and Elite is not responsible for the accuracy of the antenna gain”.

2. Introduction

2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the California Eastern Laboratories WiFi/BLE module (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by California Eastern Laboratories located in Wauconda, IL.

2.2. Purpose

The test series was performed to determine if the EUT meets the RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.247 for a Digital Modulation intentional radiator operating within the 2400-2483.5MHz band.

The test series was also performed to determine if the EUT meets the RF emission requirements of the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen and Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-247 for a Digital Modulation intentional radiator operating within the 2400-2483.5MHz band.

Testing was performed in accordance with ANSI C63.10-2013.

2.3. Identification of the EUT

The EUT was identified as follows:

EUT Identification	
Product Description	WiFi/BLE module
Model/Part No.	CMP4010
S/N	** 41 for the board (31 for the module); 40 for the board (30 for the module)
Device Type	Digitally Modulated Transmission Device
Band of Operation	2400-2483.5MHz
Software/Firmware Version	6.2B
Conducted Output Power	26.9dBm (489.8mW)
Antenna Type	PCB trace antenna
Manufacturer Supplied# Antenna Gain (dBi)	1.5dB
6dB Bandwidth	36.5MHz
Occupied Bandwidth (99% CBW)	36.5MHz
Size of EUT	0.656" x 1.03"

** Serial No. 41 for the board (31 for the module) was used for all case spurious radiated emissions tests and for EIRP tests. Serial No. 40 for the board (30 for the module) was used for all antenna port conducted emissions tests.

- Antenna gain is supplied by the manufacturer and Elite is not responsible for the accuracy of the antenna gain.

3. Power Input

The EUT received 5VDC from two wires of a USB cable. The USB cable was connected to the USB port of an Acer Travel Mate B117 Series (Model No. N16Q9) laptop computer. The computer was powered with 19VDC from the output of an AC adapter Model No. A13-045N2A. The AC adapter was powered with 115V, 60Hz.

4. Grounding

The EUT was not connected to ground.

5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

Description	Model #
Laptop Computer	Acer Travel Mate B117 Series (N16Q9)
AC Adapter	A13-045N2A

6. Interconnect Leads

The following interconnect cables were submitted with the test item:

Item	Description
USB Cable	The USB cable was used to connect the EUT to the laptop computer. The laptop computer was used to program the EUT into the correct mode and to provide 5VDC power to the EUT. The laptop computer was external to the test chamber for all radiated emissions and all EIRP tests.

7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

8. Modes of Operation

The EUT and all peripheral equipment were energized. The unit was programmed to transmit in one of the following modes for antenna port conducted emissions tests:

Mode	Description
802.11b 1Mbps	- 2412MHz, Power Setting = 94 - 2437MHz, Power Setting = 96 - 2472MHz, Power Setting = 77
802.11b 2Mbps	- 2412MHz, Power Setting = 94 - 2437MHz, Power Setting = 96 - 2472MHz, Power Setting = 77
802.11b 5.5Mbps	- 2412MHz, Power Setting = 94 - 2437MHz, Power Setting = 96 - 2472MHz, Power Setting = 77
802.11b 11Mbps	- 2412MHz, Power Setting = 94 - 2437MHz, Power Setting = 96 - 2472MHz, Power Setting = 77
802.11g 6Mbps	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 97 - 2472MHz, Power Setting = 31
802.11g 9Mbps	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 97 - 2472MHz, Power Setting = 31
802.11g 12Mbps	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 97 - 2472MHz, Power Setting = 31
802.11g 18Mbps	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 97 - 2472MHz, Power Setting = 31
802.11g 24Mbps	- 2412MHz, Power Setting = 91

	- 2437MHz, Power Setting = 97 - 2472MHz, Power Setting = 31
802.11g 36Mbps	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 95 - 2472MHz, Power Setting = 31
802.11g 48Mbps	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 95 - 2472MHz, Power Setting = 31
802.11g 54Mbps	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 95 - 2472MHz, Power Setting = 31
802.11n, 20MHz, MCS0	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 97 - 2472MHz, Power Setting = 27
802.11n, 20MHz, MCS1	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 95 - 2472MHz, Power Setting = 27
802.11n, 20MHz, MCS2	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 95 - 2472MHz, Power Setting = 27
802.11n, 20MHz, MCS3	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 91 - 2472MHz, Power Setting = 27
802.11n, 20MHz, MCS4	- 2412MHz, Power Setting = 91 - 2437MHz, Power Setting = 91 - 2472MHz, Power Setting = 27
802.11n, 20MHz, MCS5	- 2412MHz, Power Setting = 89 - 2437MHz, Power Setting = 87 - 2472MHz, Power Setting = 27
802.11n, 20MHz, MCS6	- 2412MHz, Power Setting = 89 - 2437MHz, Power Setting = 87 - 2472MHz, Power Setting = 27
802.11n, 20MHz, MCS7	- 2412MHz, Power Setting = 89 - 2437MHz, Power Setting = 87 - 2472MHz, Power Setting = 27
802.11n, 40MHz, MCS0	- 2422MHz, Power Setting = 106 - 2437MHz, Power Setting = 105 - 2452MHz, Power Setting = 103
802.11n, 40MHz, MCS1	- 2422MHz, Power Setting = 102 - 2437MHz, Power Setting = 101 - 2452MHz, Power Setting = 99
802.11n, 40MHz, MCS2	- 2422MHz, Power Setting = 102 - 2437MHz, Power Setting = 101 - 2452MHz, Power Setting = 99
802.11n, 40MHz, MCS3	- 2422MHz, Power Setting = 98 - 2437MHz, Power Setting = 97 - 2452MHz, Power Setting = 95
802.11n, 40MHz, MCS4	- 2422MHz, Power Setting = 98 - 2437MHz, Power Setting = 97 - 2452MHz, Power Setting = 95
802.11n, 40MHz, MCS5	- 2422MHz, Power Setting = 94 - 2437MHz, Power Setting = 93 - 2452MHz, Power Setting = 91
802.11n, 40MHz, MCS6	- 2422MHz, Power Setting = 94 - 2437MHz, Power Setting = 93

	- 2452MHz, Power Setting = 91
802.11n, 40MHz, MCS7	- 2422MHz, Power Setting = 94 - 2437MHz, Power Setting = 93 - 2452MHz, Power Setting = 91
Bluetooth	- 2402MHz, 1MHz, Power Setting = Hex 14 - 2444MHz, 1MHz, Power Setting = Hex 14 - 2480MHz, 1MHz, Power Setting = Hex 14
Bluetooth	- 2402MHz, 2MHz, Power Setting = Hex 14 - 2444MHz, 2MHz, Power Setting = Hex 14 - 2480MHz, 2MHz, Power Setting = Hex 14

The EUT and all peripheral equipment were energized. The unit was programmed to transmit in one of the following modes for radiated emissions and EIRP tests:

Mode	Description
802.11b 11Mbps	- 2412MHz, Power Setting = 97 - 2437MHz, Power Setting = 99 - 2472MHz, Power Setting = 80
802.11g 54Mbps	- 2412MHz, Power Setting = 93 - 2437MHz, Power Setting = 98 - 2472MHz, Power Setting = 33
802.11n, 20MHz, MCS6	- 2412MHz, Power Setting = 93 - 2437MHz, Power Setting = 94 - 2472MHz, Power Setting = 29
802.11n, 40MHz, MCS0	- 2422MHz, Power Setting = 107 - 2437MHz, Power Setting = 106 - 2452MHz, Power Setting = 103
Bluetooth	- 2402MHz, 1MHz, Power Setting = Hex 14 - 2444MHz, 1MHz, Power Setting = Hex 14 - 2480MHz, 1MHz, Power Setting = Hex 14

9. Test Specifications

The tests were performed to selected portions of, and in accordance with the following test specifications:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Compliance Measurements On Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 April 2, 2019 KDB 558074 D01v05r02
- RSS-247 Issue 2, February 2017, "Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices"
- RSS-Gen Issue 5, March 2019, Amendment 1, Innovation, Science, and Economic Development Canada, "Spectrum Management and Telecommunications, Radio Standards Specification, General Requirements for Compliance of Radio Apparatus"

10. Test Plan

No test plan was provided. Instructions were provided by personnel from California Eastern Laboratories and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247, and ANSI C63.4-2014 specifications.

11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

12. Laboratory Conditions

Ambient Parameters	Value
Temperature	22°C
Relative Humidity	17%
Atmospheric Pressure	1019mb

13. Summary

The following EMC tests were performed, and the results are shown below:

Test Description	Requirements	Test Methods	S/N	Results
Transmitter Conducted Emissions Test (AC Mains)	FCC 15B 15.207 ISED RSS-GEN	ANSI C63.10: 2013	41 for the board (31 for the module)	Conforms
6dB Bandwidth	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	40 for the board (30 for the module)	Conforms
99% Bandwidth	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	40 for the board (30 for the module)	---
Output Power	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	40 for the board (30 for the module)	Conforms
Power Spectral Density	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	40 for the board (30 for the module)	Conforms
Low Band Edge	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	40 for the board (30 for the module)	Conforms
Duty Cycle Correction Factor	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	41 for the board (31 for the module)	---
EIRP	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	41 for the board (31 for the module)	Conforms
Spurious Radiated Emissions	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	41 for the board (31 for the module)	Conforms
High Band Edge	FCC 15C 15.247 ISED RSS-247	ANSI C63.10: 2013	41 for the board (31 for the module)	Conforms

14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dBuV)} = MTR \text{ (dBuV)} + CF \text{ (dB)}.$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: FS (dBuV/m)} = \text{MTR (dBuV)} + \text{AF (dB/m)} + \text{CF (dB)} + (-\text{PA (dB)}) + \text{DC (dB)}$$

To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

$$\text{Formula 2: FS (uV/m)} = \text{AntiLog} [(\text{FS (dBuV/m)})/20]$$


15. Statement of Conformity


The California Eastern Laboratories WiFi/BLE module, Model No. CMP4010, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247.

16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

17. Photographs of EUT

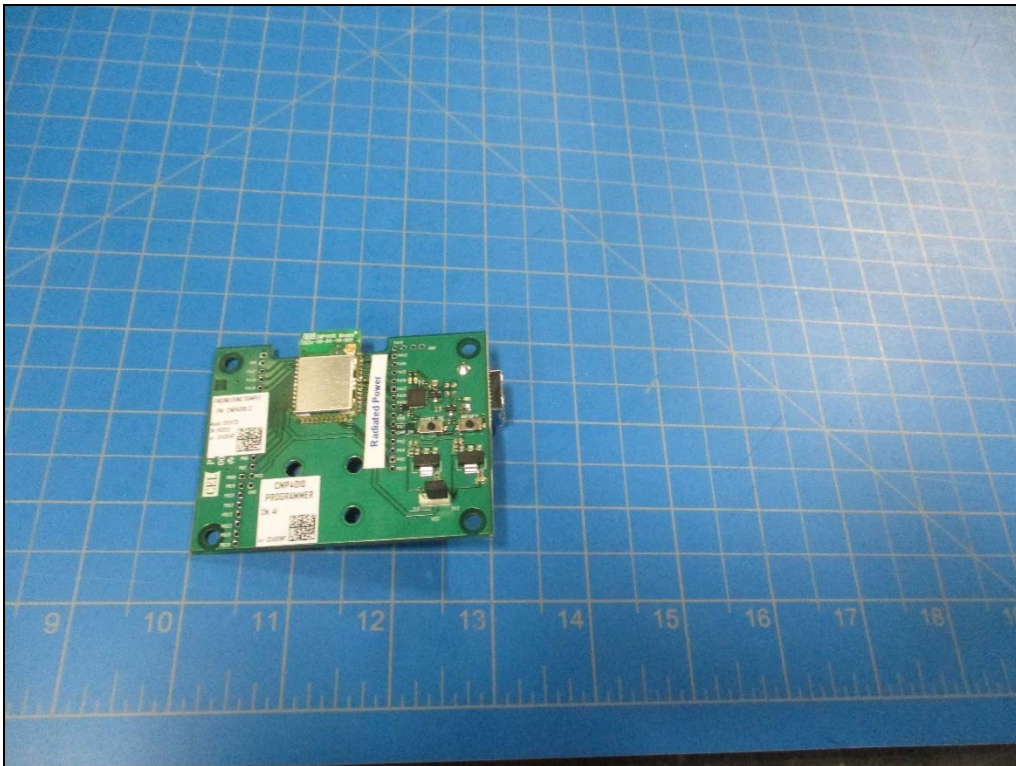

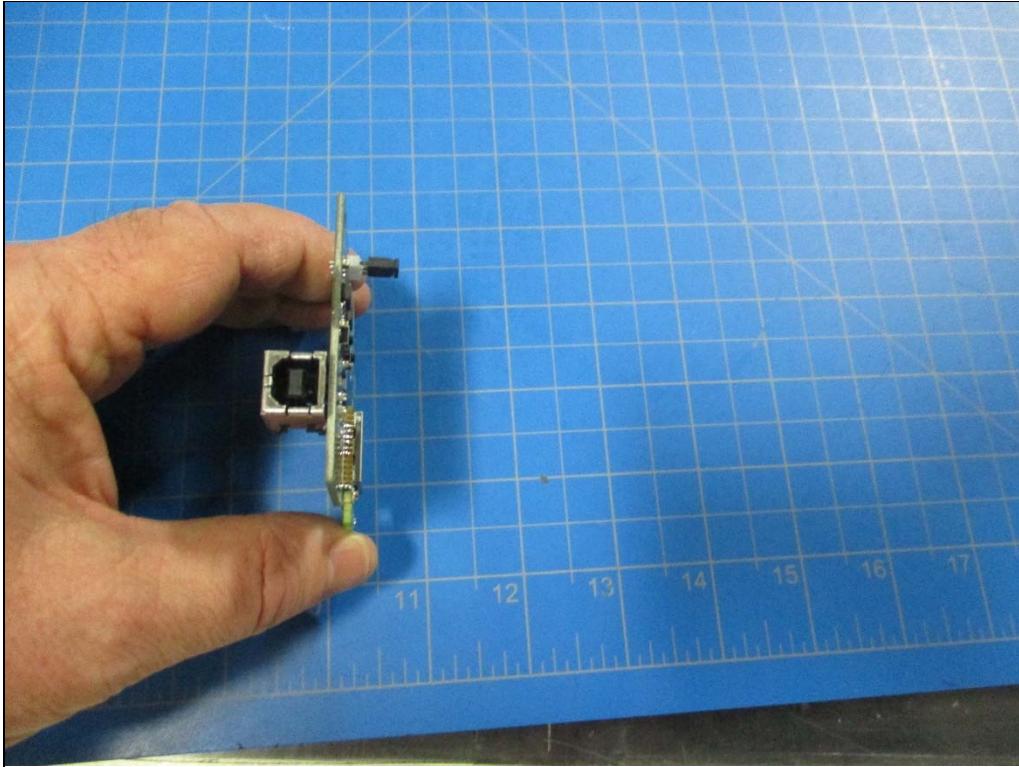

18. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW0	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G	PL2926/0646	20GHZ-26.5GHZ	9/24/2020	9/24/2021
APW10	PREAMPLIFIER	PMI	PE2-35-120-5R0-10-12-SFF	PL9609/1139	1GHZ-20GHZ	4/2/2020	4/2/2021
CDU6	LAB COMPUTER	HP		5CB2291DQN		N/A	
CDW6	DESKTOP COMPUTER	ELITE	PENTIUM 4	007	3.8 GHZ	N/A	
GSFB	OSP120 BASE UNIT	ROHDE & SCHWARZ	OSP120	101246	---	4/1/2020	4/1/2021
GSFE	OSP120	ROHDE & SCHWARZ	OSP120	101288	.01-40GHZ	5/2/2019	5/2/2021
NHG0	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	4/28/2020	4/28/2022
PLF2	CISPR16 50UH LISN	ELITE	CISPR16/70A	002	.15-30MHz	4/21/2020	4/21/2021
PLF4	CISPR16 50UH LISN	ELITE	CISPR16/70A	003	.15-30MHz	4/21/2020	4/21/2021
RBE1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU26	100096	20Hz-26GHz	7/29/2020	7/29/2021
RBG3	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101592	2HZ-44GHZ	4/24/2020	4/24/2021
SHC2	Power Supplies	HENGFU	HF60W-SL-24	A11372702	24V	NOTE 1	
T1E4	10DB 25W ATTENUATOR (RM 11)	WEINSCHEL	46-10-43	AV5805	DC-18GHZ	3/10/2020	3/10/2022
XOB2	ADAPTER	HEWLETT PACKARD	K281C,012	09407	18-26.5GHZ	NOTE 1	
XPQ4	HIGH PASS FILTER	K&L MICROWAVE	11SH10-4800/X20000-O/O	1	4.8-20GHZ	9/6/2019	9/6/2021


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

19. Block Diagram of Test Setup

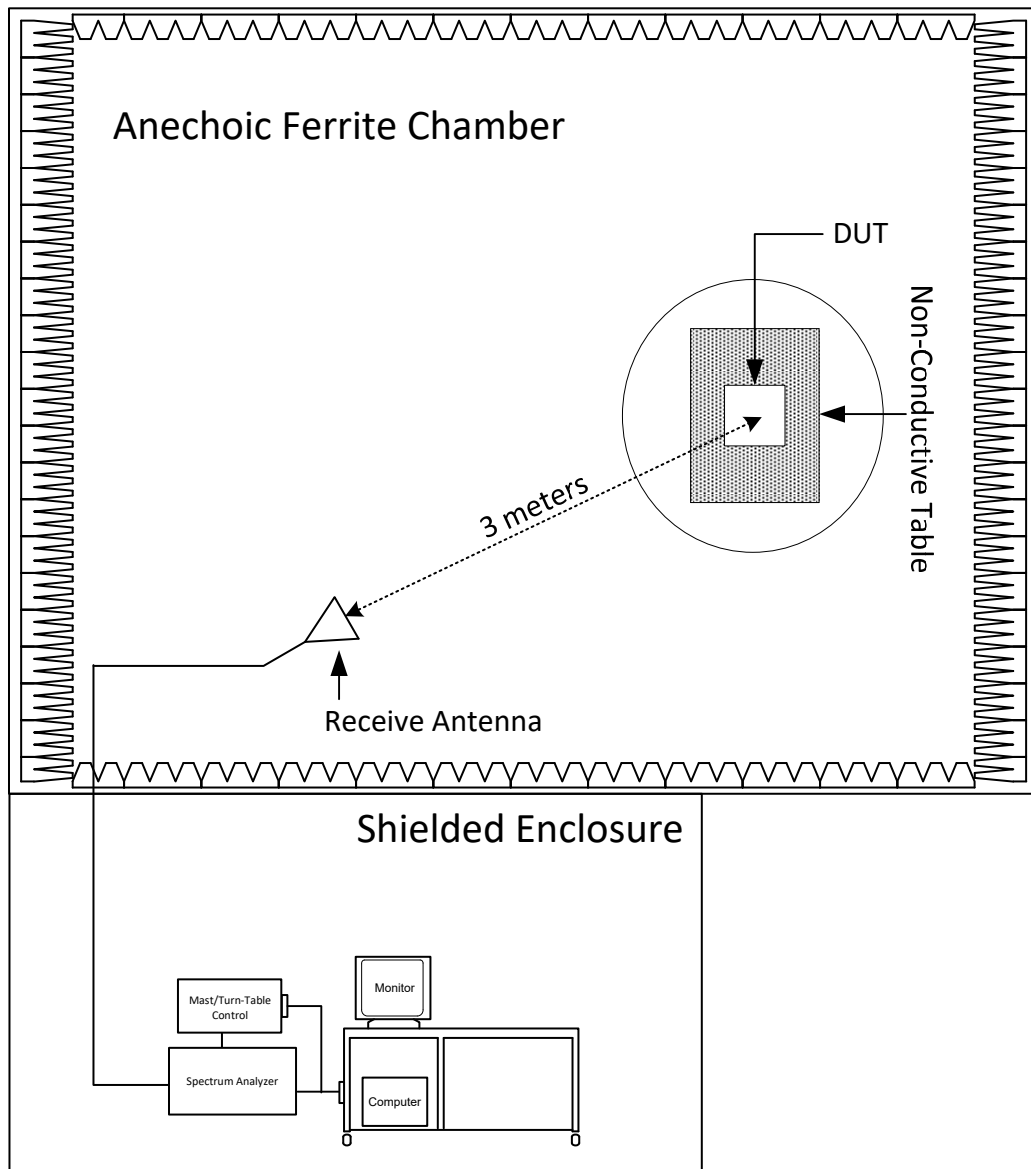

Radiated Measurements Test Setup

20. Transmitter Conducted Emissions Test (AC Mains)

Test Information	
Manufacturer	California Eastern Laboratories
Product	WiFi/BLE module
Model	CMP4010
Serial No	41 for the board (31 for the module)
Mode	See Below

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Shielded Enclosure
Note	None

Requirements		
All radio frequency voltages on the power lines for any frequency or frequencies of an intentional radiator shall not exceed the limits in the following table:		
Frequency of Emission (MHz)	Conducted Limits (dB μ V)	
	Quasi-peak	Average
0.15-05	66 to 56*	56-46*
0.5-5	56	46
5-30	60	50


Procedures

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.


- 1) The EUT was not connected to the Acer Travel Mate B117 Series (Model No. N16Q9) laptop computer. The laptop computer was powered up and running windows.
- 2) Measurements were first made on the 120V, 60Hz high line of the A13-045N2A AC Adapter which was used to provide 19VDC to the Acer Laptop Computer.
- 3) The frequency range from 150 kHz to 30 MHz was broken up into smaller frequency sub-bands.
- 4) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- 5) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 4dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 4dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- 6) Steps (4) and (5) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits.
- 7) Steps (3) through (6) were repeated on the 120V, 60Hz return line of the A13-045N2A AC Adapter which was used to provide 19VDC to the Acer Laptop Computer line.
- 8) Steps (2) through (7) were repeated with the EUT connected to the Acer Laptop Computer via A USB cable and the transmitter on the EUT placed in idle mode.
- 9) Steps (2) through (7) were repeated with the EUT connected to the Acer Laptop Computer via A USB cable and the transmitter on the EUT placed in transmit at 802.11b, Ch. 6 (2437MHz).
- 10) Steps (2) through (7) were repeated with the EUT connected to the Acer Laptop Computer via A USB cable and the transmitter on the EUT placed in Bluetooth transmit at 2444MHz.

Measurement Uncertainty

Measurement Type	Expanded Measurement Uncertainty
Conducted disturbance (mains port) (150 kHz – 30 MHz)	2.7

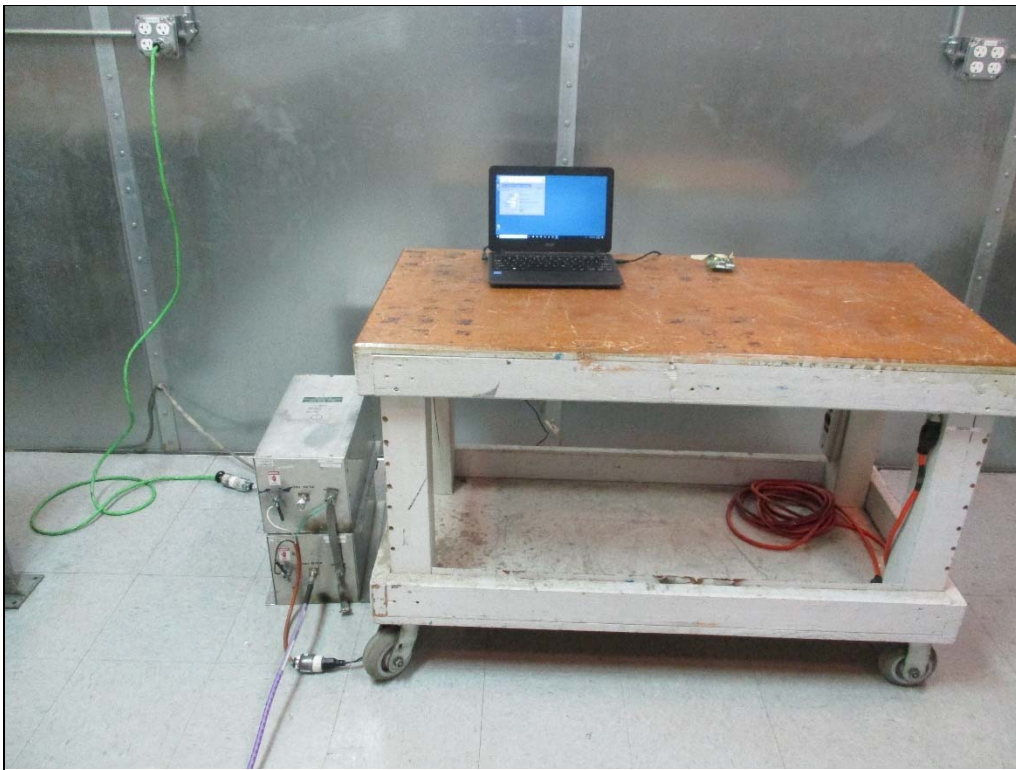

Test Setup for RF Conducted Emissions (AC Mains)

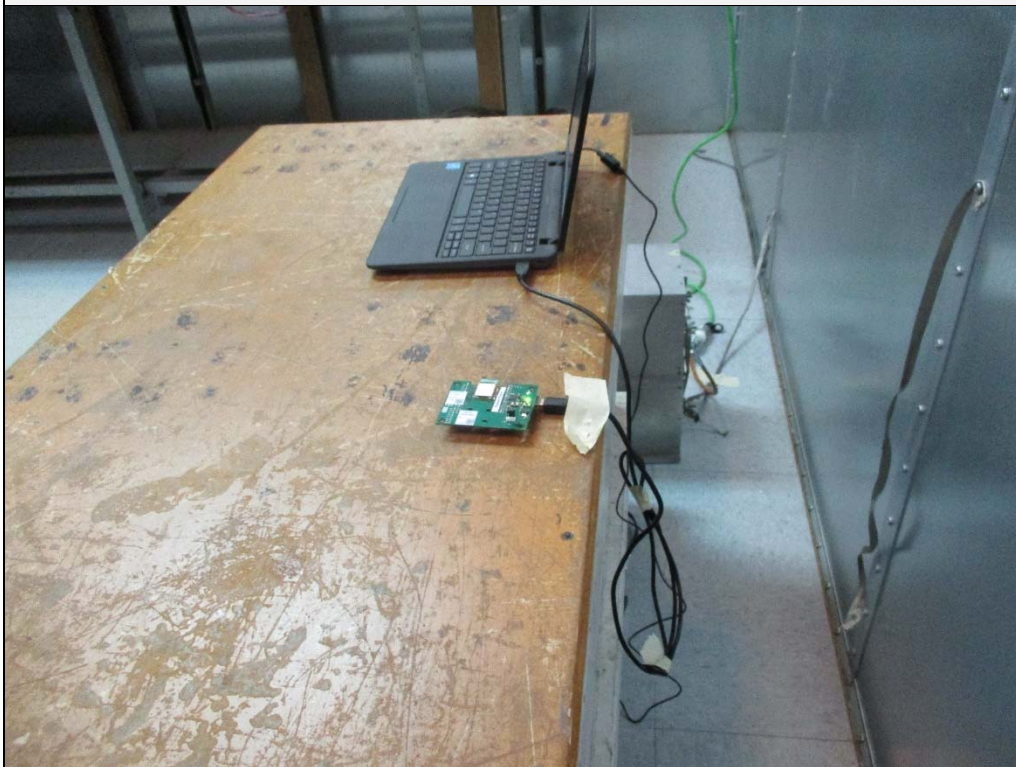

Test Setup for RF Conducted Emissions (AC Mains)

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : California Eastern Laboratories
 Model : Acer Travel Mate B117 Series (Model No. N16Q9)
 DUT Revision :
 Serial Number :
 DUT Mode : On - EUT not connected
 Line Tested : 120V, 60Hz high
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 11:47:55 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.155	50.5	65.8		41.2	55.8	
0.500	40.1	56.0		33.5	46.0	
0.997	22.5	56.0		16.3	46.0	
1.930	26.7	56.0		21.0	46.0	
2.088	25.5	56.0		19.7	46.0	
4.072	29.1	56.0		22.0	46.0	
5.662	29.2	60.0		23.8	50.0	
9.941	29.0	60.0		23.3	50.0	
19.472	17.8	60.0		14.9	50.0	

FCC Part 15 Subpart C Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
Model : Acer Travel Mate B117 Series (Model No. N16Q9)
DUT Revision :
Serial Number :
DUT Mode : On - EUT not connected
Line Tested : 120V, 60Hz high
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -4
Notes : tested with AC adapter M/N: A13-045N2A
Test Engineer : M. Longinotti
Limit :
Test Date : Feb 23, 2021 11:47:55 AM

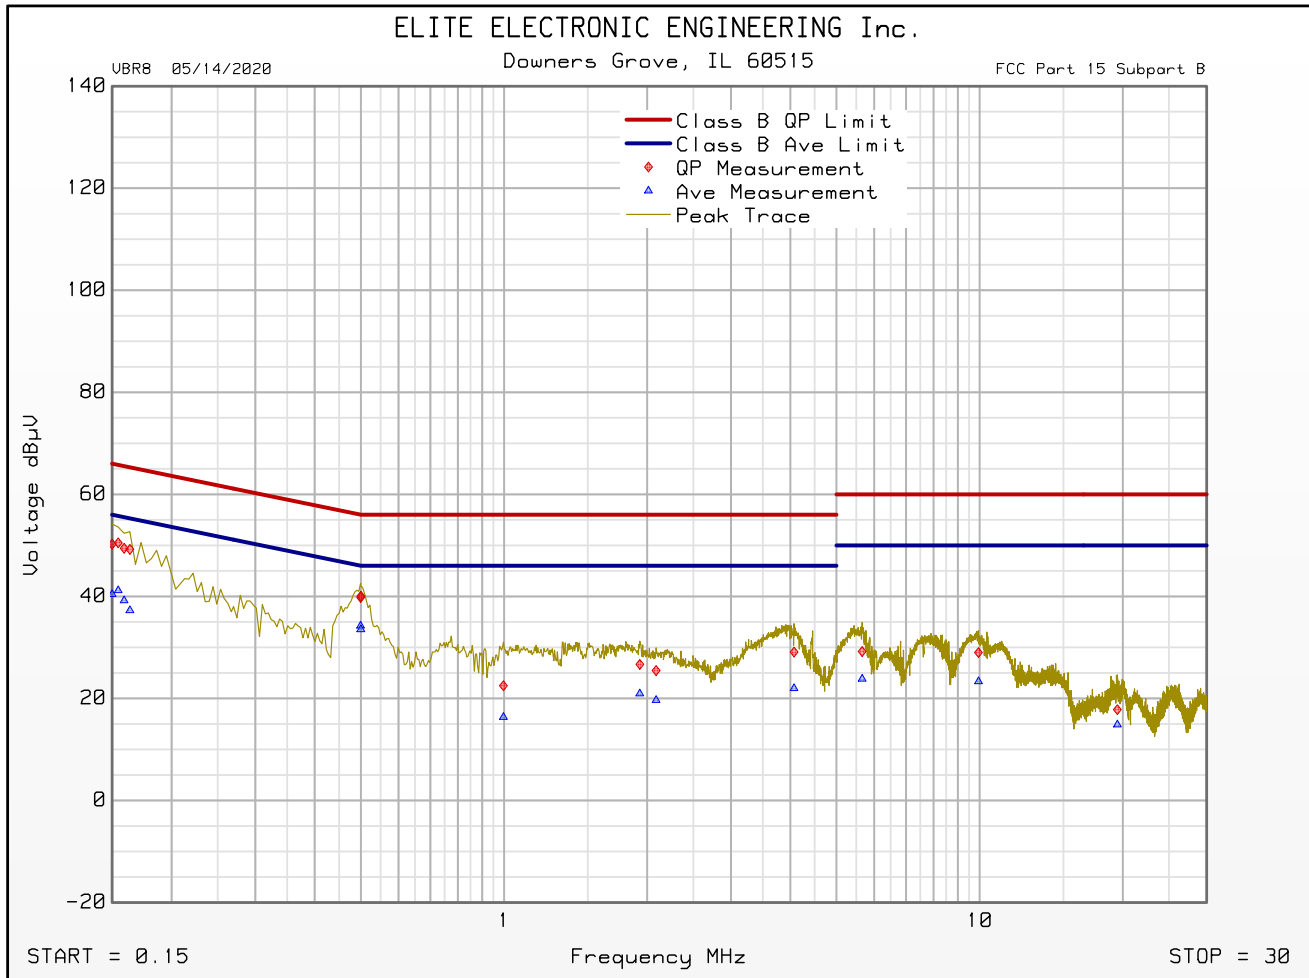

Emissions Meet QP Limit
Emissions Meet Ave Limit

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : California Eastern Laboratories
 Model : Acer Travel Mate B117 Series (Model No. N16Q9)
 DUT Revision :
 Serial Number :
 DUT Mode : On - EUT not connected
 Line Tested : 120V, 60Hz return
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 11:53:06 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.155	49.8	65.8		40.5	55.8	
0.500	41.0	56.0		35.0	46.0	
0.871	26.8	56.0		22.3	46.0	
1.394	23.1	56.0		17.6	46.0	
3.110	25.5	56.0		18.3	46.0	
3.788	32.2	56.0		24.6	46.0	
5.000	28.3	56.0		22.6	46.0	
9.693	29.2	60.0		21.7	50.0	
18.415	23.0	60.0		19.6	50.0	

FCC Part 15 Subpart C Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
 Model : Acer Travel Mate B117 Series (Model No. N16Q9)
 DUT Revision :
 Serial Number :
 DUT Mode : On - EUT not connected
 Line Tested : 120V, 60Hz return
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 11:53:06 AM

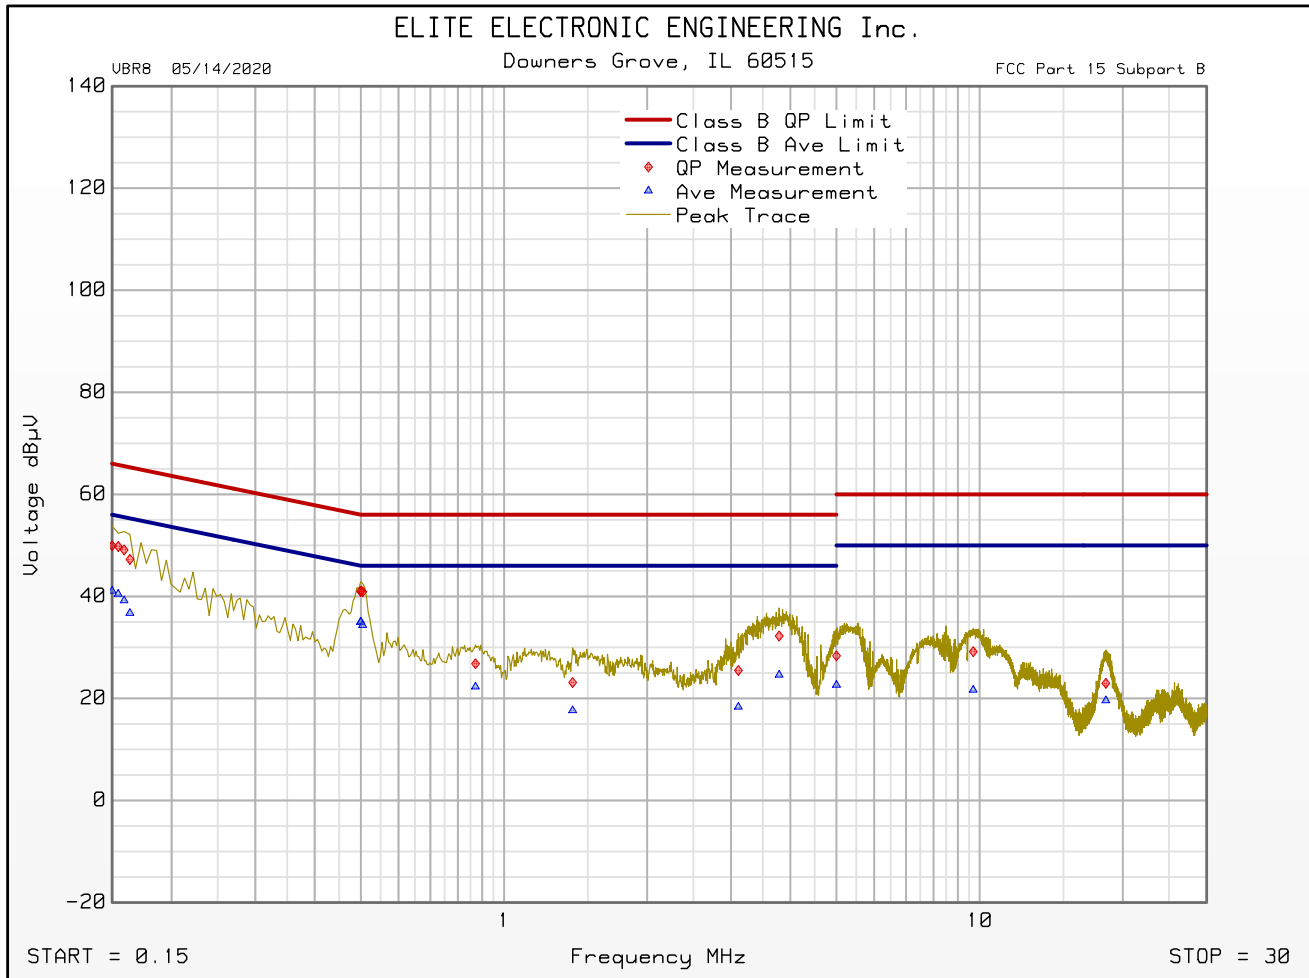

Emissions Meet QP Limit
 Emissions Meet Ave Limit

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
 Model : CMP4010
 DUT Revision :
 Serial Number : 41 for the board (31 for the module)
 DUT Mode : Transmitter idle
 Line Tested : 120V, 60Hz return
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 12:03:26 PM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit


Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.159	49.5	65.5		39.6	55.5	
0.495	40.6	56.1		34.7	46.1	
0.505	39.3	56.0		33.5	46.0	
0.790	27.4	56.0		22.2	46.0	
1.340	25.1	56.0		19.4	46.0	
3.105	26.2	56.0		19.9	46.0	
4.081	32.4	56.0		24.1	46.0	
5.621	31.5	60.0		27.0	50.0	
9.779	30.5	60.0		25.3	50.0	
18.176	21.7	60.0		15.1	50.0	

FCC Part 15 Subpart C Conducted Emissions Test

Cumulative Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
 Model : CMP4010
 DUT Revision :
 Serial Number : 41 for the board (31 for the module)
 DUT Mode : Transmitter idle
 Line Tested : 120V, 60Hz return
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 12:03:26 PM

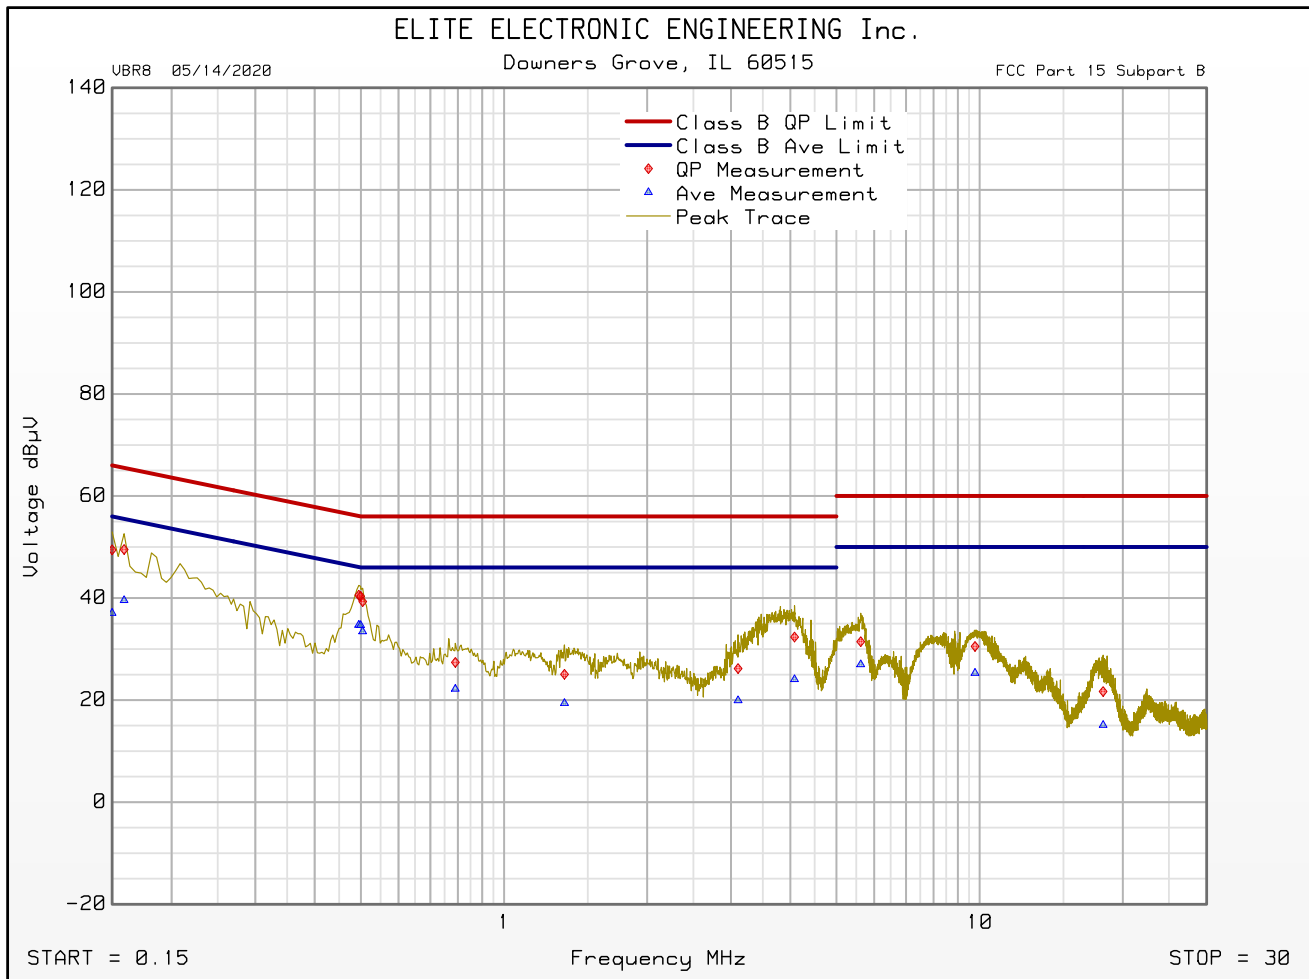

Emissions Meet QP Limit
 Emissions Meet Ave Limit

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : California Eastern Laboratories
 Model : CMP4010
 DUT Revision :
 Serial Number : 41 for the board (31 for the module)
 DUT Mode : Transmitter Idle
 Line Tested : 120V, 60Hz high
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 01:24:18 PM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.155	48.8	65.8		40.4	55.8	
0.495	40.8	56.1		35.1	46.1	
0.500	40.7	56.0		35.6	46.0	
0.831	27.1	56.0		22.5	46.0	
1.903	26.7	56.0		24.3	46.0	
2.034	27.9	56.0		23.8	46.0	
3.982	31.1	56.0		24.7	46.0	
5.581	31.1	60.0		26.2	50.0	
10.404	27.0	60.0		20.8	50.0	
18.541	20.1	60.0		14.6	50.0	

FCC Part 15 Subpart C Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
Model : CMP4010
DUT Revision :
Serial Number : 41 for the board (31 for the module)
DUT Mode : Transmitter Idle
Line Tested : 120V, 60Hz high
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -4
Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
Test Engineer : M. Longinotti
Limit :
Test Date : Feb 23, 2021 01:24:18 PM

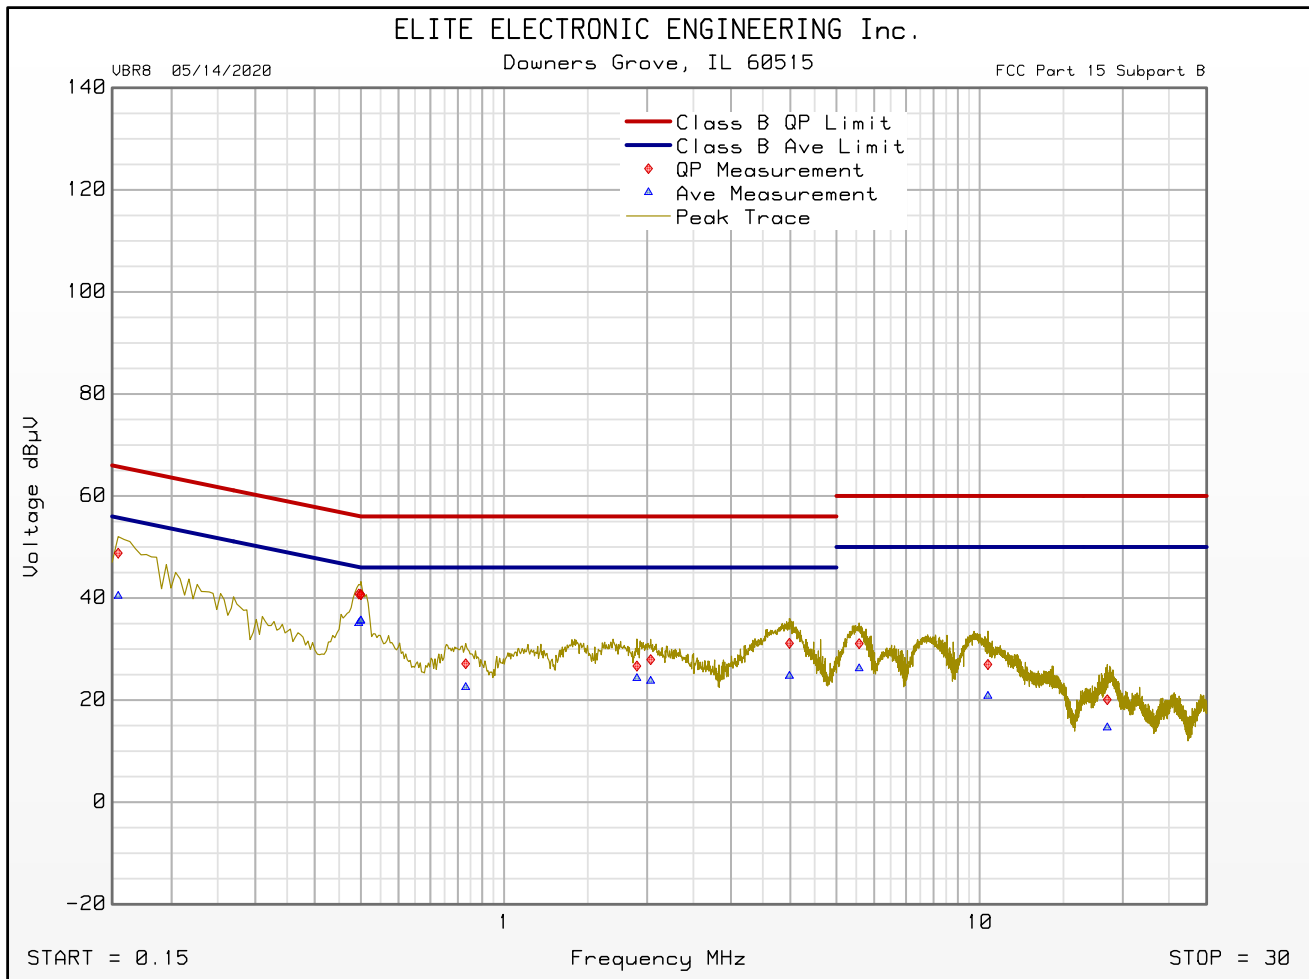

Emissions Meet QP Limit
Emissions Meet Ave Limit

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : California Eastern Laboratories
 Model : CMP4010
 DUT Revision :
 Serial Number : 41 for the board (31 for the module)
 DUT Mode : Transmit at 802.11b, Ch. 6 (2437MHz)
 Line Tested : 120V, 60Hz high
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 01:11:18 PM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.150	51.1	66.0		42.9	56.0	
0.495	39.6	56.1		33.8	46.1	
0.505	38.8	56.0		32.9	46.0	
1.114	27.2	56.0		22.7	46.0	
1.903	29.2	56.0		24.6	46.0	
2.106	26.1	56.0		20.3	46.0	
4.009	32.7	56.0		26.2	46.0	
5.608	32.2	60.0		27.4	50.0	
10.098	30.8	60.0		25.3	50.0	
19.261	21.0	60.0		15.8	50.0	

FCC Part 15 Subpart C Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
Model : CMP4010
DUT Revision :
Serial Number : 41 for the board (31 for the module)
DUT Mode : Transmit at 802.11b, Ch. 6 (2437MHz)
Line Tested : 120V, 60Hz high
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -4
Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
Test Engineer : M. Longinotti
Limit :
Test Date : Feb 23, 2021 01:11:18 PM

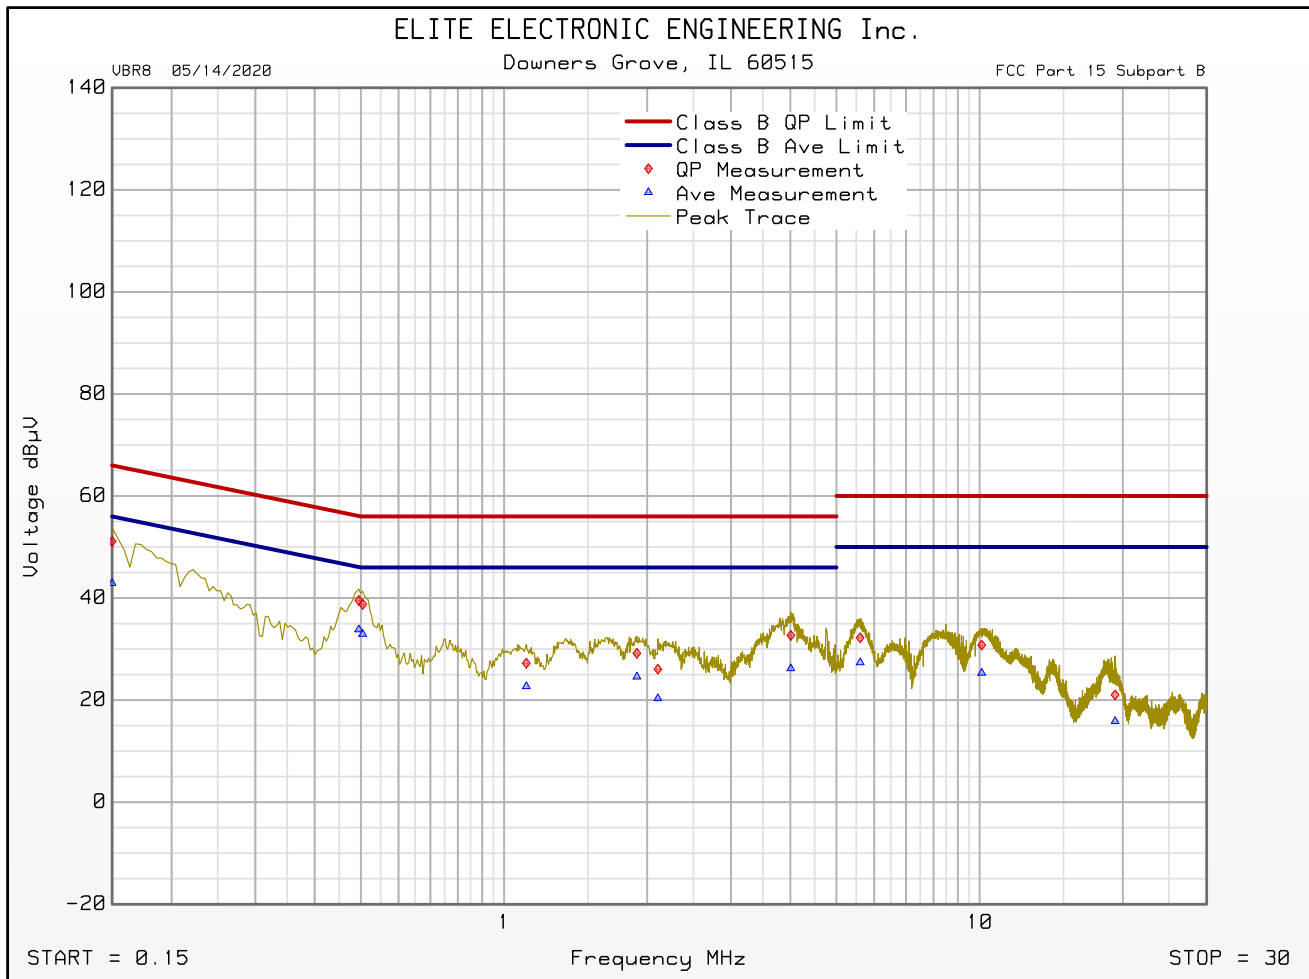

Emissions Meet QP Limit
Emissions Meet Ave Limit

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : California Eastern Laboratories
 Model : CMP4010
 DUT Revision :
 Serial Number : 41 for the board (31 for the module)
 DUT Mode : Transmit at 802.11b, Ch. 6 (2437MHz)
 Line Tested : 120V, 60Hz return
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 12:13:08 PM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.150	52.0	66.0		40.6	56.0	
0.486	38.6	56.2		33.5	46.2	
0.514	37.2	56.0		31.2	46.0	
0.993	27.2	56.0		22.7	46.0	
1.372	27.4	56.0		22.5	46.0	
3.128	23.9	56.0		18.6	46.0	
3.932	34.9	56.0		26.8	46.0	
5.626	32.9	60.0		28.4	50.0	
10.440	30.5	60.0		25.0	50.0	
17.861	24.5	60.0		18.8	50.0	

FCC Part 15 Subpart C Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
Model : CMP4010
DUT Revision :
Serial Number : 41 for the board (31 for the module)
DUT Mode : Transmit at 802.11b, Ch. 6 (2437MHz)
Line Tested : 120V, 60Hz return
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -4
Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
Test Engineer : M. Longinotti
Limit :
Test Date : Feb 23, 2021 12:13:08 PM

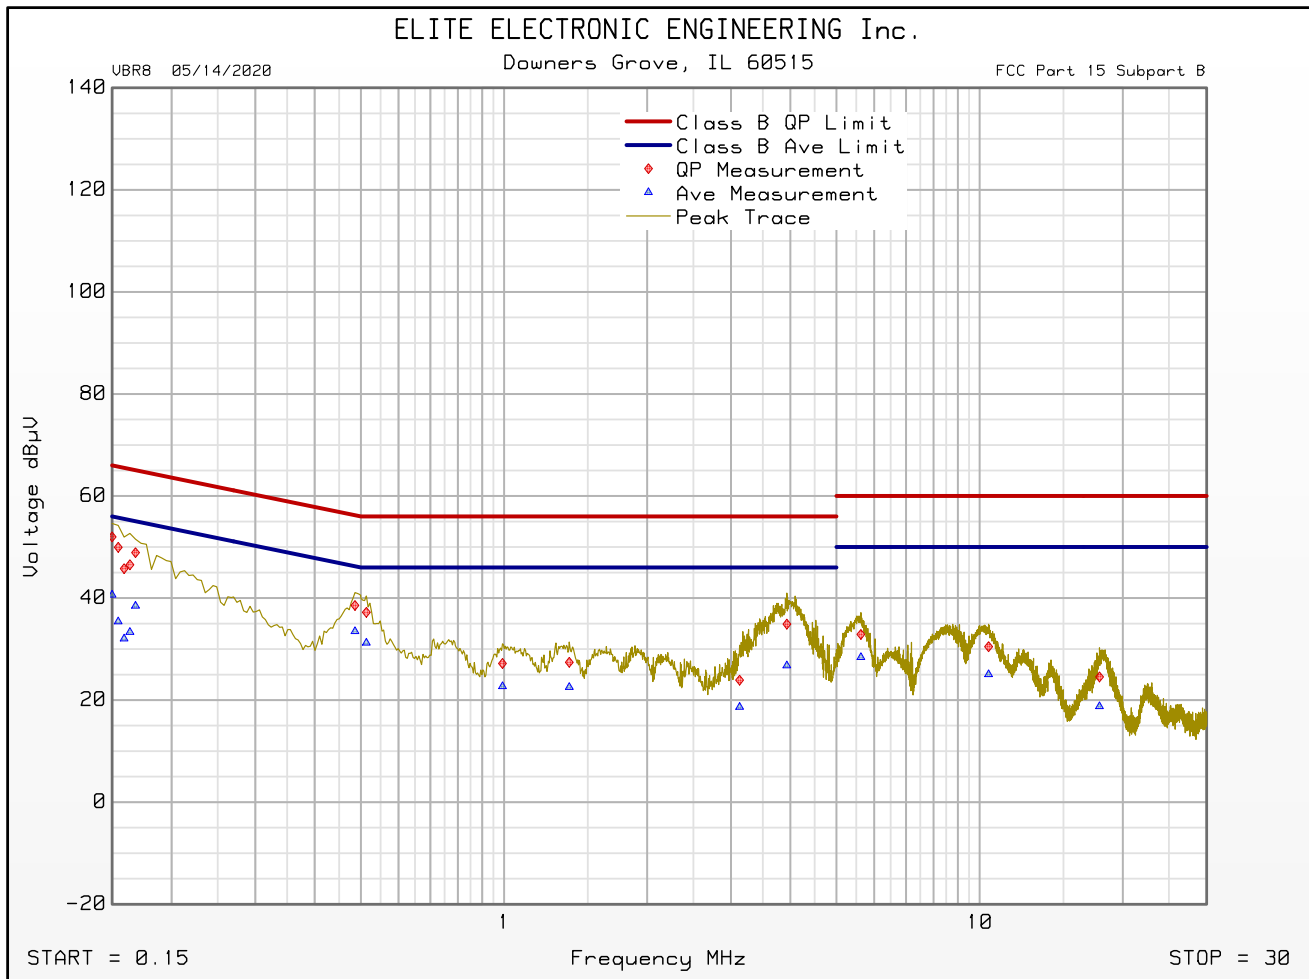

Emissions Meet QP Limit
Emissions Meet Ave Limit

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
 Model : CMP4010
 DUT Revision :
 Serial Number : 41 for the board (31 for the module)
 DUT Mode : BLE Transmit at 2444MHz
 Line Tested : 120V, 60Hz high
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 12:26:23 PM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.150	49.4	66.0		38.8	56.0	
0.495	40.1	56.1		35.3	46.1	
0.505	39.2	56.0		34.1	46.0	
0.853	26.0	56.0		19.8	46.0	
1.646	28.4	56.0		23.1	46.0	
1.985	28.3	56.0		23.3	46.0	
4.049	30.9	56.0		24.5	46.0	
5.581	31.6	60.0		27.1	50.0	
10.179	29.4	60.0		24.3	50.0	
19.045	21.4	60.0		15.6	50.0	




FCC Part 15 Subpart C Conducted Emissions Test

Cumulative Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
Model : CMP4010
DUT Revision :
Serial Number : 41 for the board (31 for the module)
DUT Mode : BLE Transmit at 2444MHz
Line Tested : 120V, 60Hz high
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -4
Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
Test Engineer : M. Longinotti
Limit :
Test Date : Feb 23, 2021 12:26:23 PM

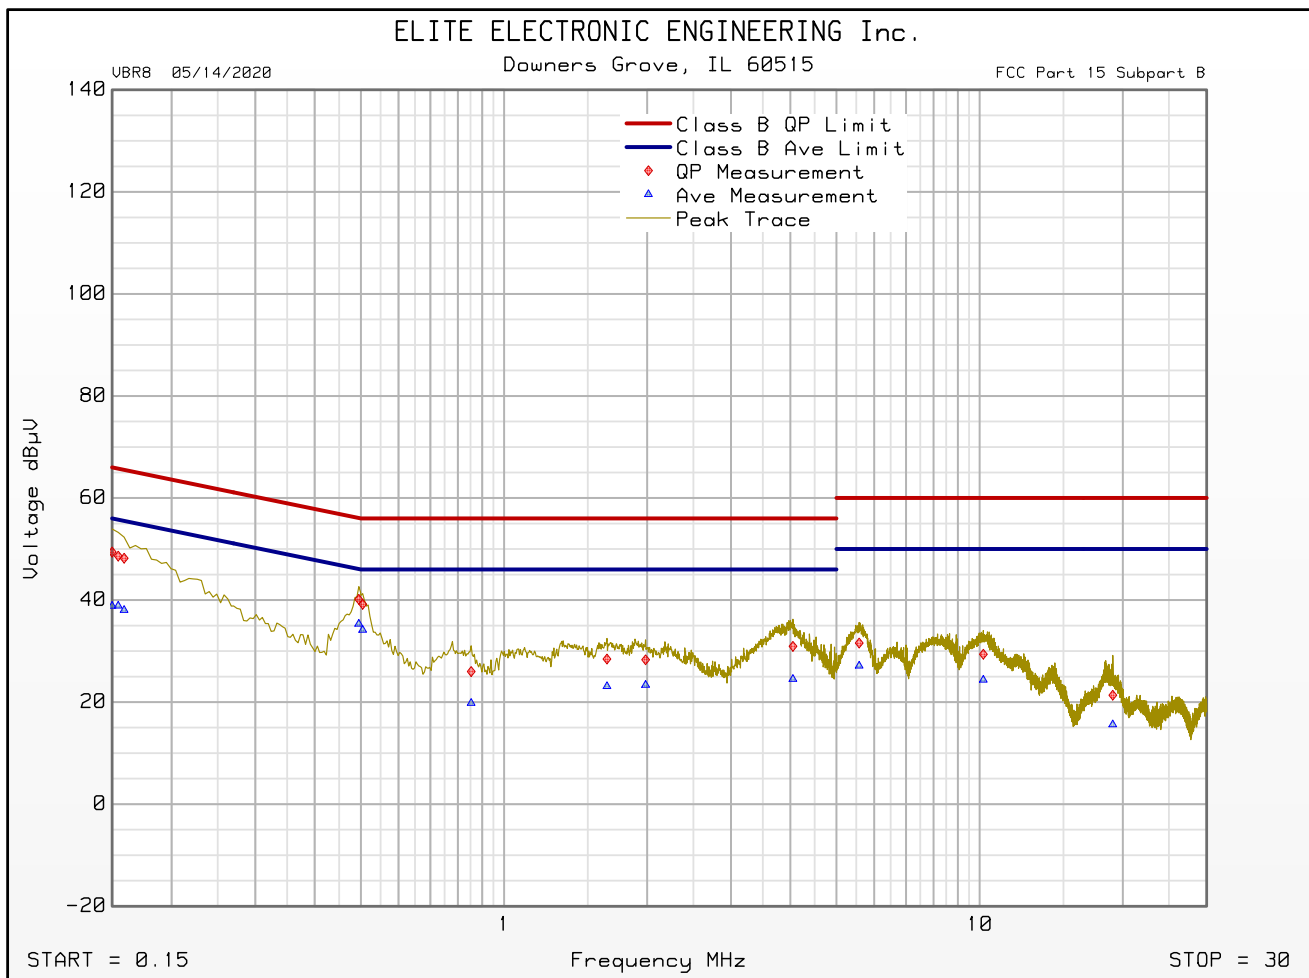

Emissions Meet QP Limit
Emissions Meet Ave Limit

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : California Eastern Laboratories
 Model : CMP4010
 DUT Revision :
 Serial Number : 41 for the board (31 for the module)
 DUT Mode : BLE Transmit at 2444MHz
 Line Tested : 120V, 60Hz return
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
 Test Engineer : M. Longinotti
 Limit :
 Test Date : Feb 23, 2021 12:21:09 PM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.150	49.8	66.0		38.8	56.0	
0.495	39.8	56.1		34.8	46.1	
0.500	39.5	56.0		34.3	46.0	
0.822	27.2	56.0		21.9	46.0	
1.372	27.1	56.0		21.7	46.0	
3.128	25.8	56.0		19.6	46.0	
4.144	32.7	56.0		23.2	46.0	
5.684	31.0	60.0		25.0	50.0	
10.107	29.8	60.0		25.0	50.0	
17.897	24.4	60.0		18.8	50.0	

FCC Part 15 Subpart C Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : California Eastern Laboratories
Model : CMP4010
DUT Revision :
Serial Number : 41 for the board (31 for the module)
DUT Mode : BLE Transmit at 2444MHz
Line Tested : 120V, 60Hz return
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -4
Notes : tested with Acer Travel Mate B117 Series (Model No. N16Q9) and AC adapter M/N: A13-045N2A
Test Engineer : M. Longinotti
Limit :
Test Date : Feb 23, 2021 12:21:09 PM

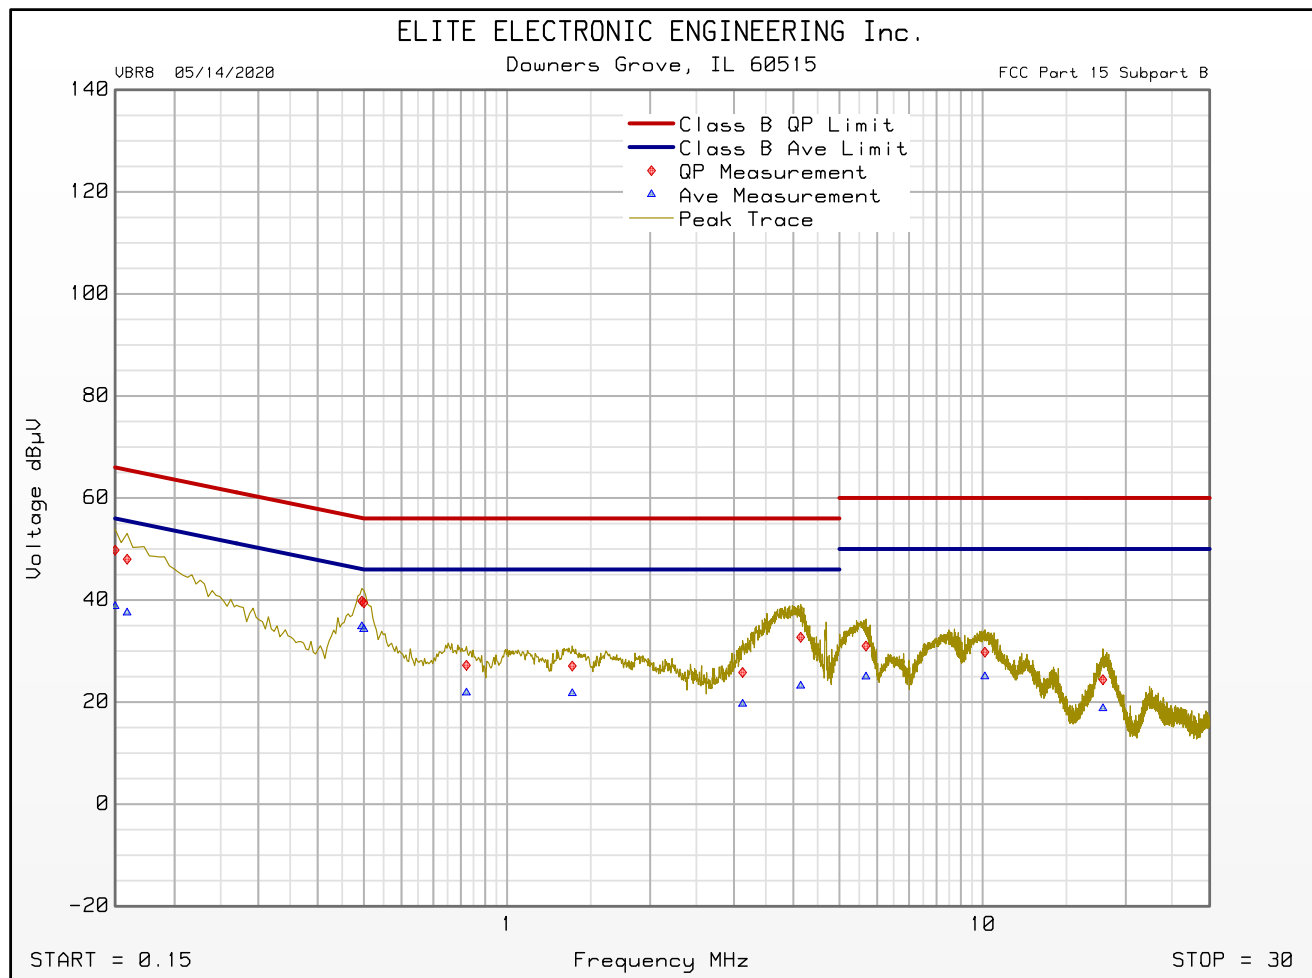

Emissions Meet QP Limit
Emissions Meet Ave Limit

21. Antenna Port Conducted Emissions Tests

Manufacturer	California Eastern Laboratories
Product	WiFi/BLE module
Model	CMP4010
Serial No	40 for the board (30 for the module)
Mode	2402MHz Transmit at Mid Channel Transmit at High Channel

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	+/- 224kHz
Power Spectral Density	+/- 0.372Hz
RF Output Power, Conducted	+/- 0.349 dB
Unwanted Emissions, Conducted	+/- 1.39 dB
All Emissions Radiated Below 1GHz	+/- 2.629 dB
All Emissions Radiated Above 1GHz	+/- 2.710 dB
Temperature	+/- 0.165 °C
Humidity	+/- 1.7% RH
DC and Low Frequency Voltages	+/- 0.115 Volts
Time	+/- 0.05%

Requirements

6dB Bandwidth (DTS Bandwidth):

Per FCC 15.247, Section (a)(2), and ISED RSS-247, Section 5.2(a), the minimum 6dB bandwidth shall be at least 500kHz for all systems using digital modulation techniques.

99% Bandwidth:

RSS-Gen requires the measurement of the 99% bandwidth (Occupied Bandwidth).

If measuring the maximum conducted (average) output power for FCC 15.247, the 99% bandwidth is used as the reference for power integration.

Peak Conducted Output Power:

Per FCC 15.247, Section (b)(3) and ISED RSS-247, Section 5.4(d), for systems using digital modulation, the maximum peak conducted output power shall not exceed 1 watt.

Peak Power Spectral Density:

Per FCC 15.247, Section (e), and ISED RSS-247, Section 5.2(b), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. If peak conducted output power was measured, the same method must be used to measure the power spectral density.

Low Band Edge:

Per FCC 15.247, Section (d) and ISED RSS-247, Section 5.5, in any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in FCC 15.209, Section (a) and ISED RSS-Gen is not required.

Duty Cycle Correction Factor:

Per ANSI C63.10, Section 11.6, duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level.

When continuous transmission cannot be achieved, measurement of the duty cycle can be used to measure the average power.

Procedures

6dB Bandwidth (DTS Bandwidth):

C63.10-2013 section 11.8 Option 1:

- a) The following settings were employed on the EMI Test Receiver:
 1. Center Frequency = Transmit Frequency of the EUT
 2. Frequency Span = 2 x Occupied Channel Bandwidth
 3. RBW = 100kHz
 4. VBW = 3 x RBW
 5. Detector Mode = Max Peak
 6. Trace Mode = Max Hold
- b) Allow the trace to stabilize.
- c) Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- d) Determine the 6dB down amplitude.
- e) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope trace, such that each marker is at or slightly below the 6dB down amplitude determined in step d). If a marker is below this 6dB down amplitude value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers.

99% Bandwidth:

C63.10-2013 section 6.9.3:

- a) The following settings were employed on the EMI Test Receiver:
 1. Center Frequency = Transmit Frequency of the EUT
 2. Frequency Span = Between 1.5 and 5 times the OBW
 3. RBW = Between 1% to 5% of the OBW
 4. VBW = Approximately 3 x RBW
 5. Steps 1) through 4) might require iterations to adjust within the specified range
 6. Detector Mode = Max Peak
 7. Trace Mode = Max Hold
- b) Allow the trace to stabilize.
- c) Use the 99% power bandwidth function of the EMI receiver.

Peak Conducted Output Power:

C63.10-2013 section 11.9.1.1:

- a) The following settings were employed on the EMI Test Receiver:
 1. Center Frequency = Transmit Frequency of the EUT
 2. RBW $\geq$ DTS Bandwidth
 3. VBW $\geq$ 3 x RBW
 4. Span $\geq$ 3 x RBW
 5. Sweep Time = Auto couple
 6. Detector Mode = Max Peak
 7. Trace Mode = Max Hold

- b) Allow the trace to stabilize.
- c) Use the peak marker function to determine the peak amplitude level.

Peak Power Spectral Density:

C63.10-20013 section 11.10.2:

- a) The following settings were employed on the EMI Test Receiver:
 - 1. Center Frequency = Transmit Frequency of the EUT
 - 2. Frequency Span = At least 1.5 times the OBW
 - 3. RBW = $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
 - 4. VBW $\geq 3 \times \text{RBW}$
 - 5. Detector Mode = Max Peak
 - 6. Sweep Time = Auto Couple
 - 7. Trace Mode = Max Hold
- b) Allow the trace to stabilize.
- c) Use the peak marker function to determine the maximum amplitude level within the RBW.
- d) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Low Band Edge:

C63.10-2013 section 11.11:

- a) Reference Level Measurement
 - 1. Start Frequency = 2400MHz
 - 2. Stop Frequency = 2483.5MHz
 - 3. RBW = 100kHz
 - 4. VBW $\geq 3 \times \text{RBW}$
 - 5. Detector Mode = Max Peak
 - 6. Trace Mode = Max Hold
 - 7. Sweep Time = Auto
- b) Allow the trace to stabilize
- c) Use the peak marker function to determine the maximum level
- d) Emission Level Measurement
 - 1. Start Frequency = 2310MHz
 - 2. Stop Frequency = 2400MHz
 - 3. RBW = 100kHz
 - 4. VBW $\geq 3 \times \text{RBW}$
 - 5. Detector Mode = Max Peak
 - 6. Trace Mode = Max Hold
 - 7. Sweep Time = Auto
- e) Allow the trace to stabilize
- f) Use the peak marker function to determine the maximum level
- g) The two sweeps were combined and plotted.

- h) Ensure that the amplitude of all unwanted emissions are attenuated by at least 20dB.

Duty Cycle Correction Factor:

C63.10-2013 section 7.5 and 11.6

- a) The following settings were employed on the EMI Test Receiver:
1. Center Frequency = Transmit Frequency of the EUT
 2. Frequency Span = 0Hz
 3. RBW $\geq$ OBW if possible; otherwise set RBW as large as possible
 4. VBW $\geq$ RBW
 5. Detector Mode = Peak or RMS
 6. Number of Measurement Points $\geq 2 \times \text{span/RBW}$
- b) Measure the ON and OFF times of the transmitted signal
- c) Duty Cycle (D) = ((ON TIME)/((ON TIME) + (OFF TIME)))

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	40 for the board (30 for the module)
Mode	See Below
Transmit Frequency	See Below
Parameters	6dB Bandwidth
Notes	For all WiFi modes

Mode	Frequency (MHz)		
	2412	2437	2472
b, 1	10.15	10.15	10.1
b, 2	9.35	9.15	9.15
b, 5.5	10.2	10.2	10.2
b, 11	8.75	8.75	8.75
g, 6	16.5	16.55	16.55
g, 9	16.65	16.6	16.6
g, 12	16.6	16.6	16.6
g, 18	16.55	16.55	16.55
g, 24	16.55	16.55	16.55
g, 36	16.55	16.55	16.6
g, 48	16.55	16.55	16.5
g, 54	16.6	16.55	16.6
MCS0, 20MHz	17.7	17.7	17.7
MCS1, 20MHz	17.8	17.8	17.8
MCS2, 20MHz	17.8	17.75	17.8
MCS3, 20MHz	17.8	17.8	17.8
MCS4, 20MHz	17.8	17.75	17.75
MCS5, 20MHz	17.75	17.8	17.8
MCS6, 20MHz	17.8	17.8	17.75
MCS7, 20MHz	17.85	17.85	17.85

Mode	Frequency (MHz)		
	2422	2437	2452
MCS0, 40MHz	36.4	36.4	36.4
MCS1, 40MHz	36.45	36.35	36.4
MCS2, 40MHz	36.45	36.45	36.45
MCS3, 40MHz	36.45	36.45	36.4
MCS4, 40MHz	36.45	36.5	36.5
MCS5, 40MHz	36.35	36.4	36.4
MCS6, 40MHz	36.35	36.1	36.1
MCS7, 40MHz	36.45	36.45	34.45

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	40 for the board (30 for the module)
Mode	See Below
Transmit Frequency	See Below
Parameters	Peak Output Power
Notes	For all WiFi modes

Mode	Frequency (MHz)		
	2412	2437	2472
b, 1	18.9	20.4	16.1
b, 2	18.8	19.8	15.7
b, 5.5	18.9	20	15.8
b, 11	19.4	20.5	16.2
g, 6	24.9	26.3	11.8
g, 9	24.2	25.8	11.9
g, 12	25.2	26.1	11.8
g, 18	24.2	25.7	11.5
g, 24	25.2	26.3	12.5
g, 36	24.9	25.8	12.4
g, 48	24.8	25.7	12
g, 54	25.4	26.2	12.2
MCS0, 20MHz	24.4	26	10.6
MCS1, 20MHz	25	25.4	10.4
MCS2, 20MHz	24.8	25.7	11.1
MCS3, 20MHz	24.7	24.7	10.5
MCS4, 20MHz	24.6	24.9	10.4
MCS5, 20MHz	24	23.7	10.1
MCS6, 20MHz	24.9	24	11.7
MCS7, 20MHz	24.4	23.6	10.6

Mode	Frequency (MHz)		
	2422	2437	2452
MCS0, 40MHz	26.6	26.9	26.8
MCS1, 40MHz	26.5	26.5	26.3
MCS2, 40MHz	26.5	26.4	26
MCS3, 40MHz	26.1	26.2	25.9
MCS4, 40MHz	26.4	26.3	25.6
MCS5, 40MHz	25.4	25.9	25
MCS6, 40MHz	25.4	25.6	24.8
MCS7, 40MHz	25.5	25.1	24.7

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	40 for the board (30 for the module)
Mode	See Below
Transmit Frequency	See Below
Parameters	Peak Power Spectral Density
Notes	For all WiFi modes

Mode	Frequency (MHz)		
	2412	2437	2472
b, 1	6.355	7.654	3.552
b, 2	6.323	7.224	3.261
b, 5.5	5.878	6.774	2.88
b, 11	6.923	7.826	3.877
g, 6	1.255	3.08	-11.891
g, 9	1.954	3.287	-11.721
g, 12	1.52	2.782	-12.087
g, 18	2.627	3.926	-11.07
g, 24	3.24	4.525	-10.675
g, 36	2.809	4.046	-10.5998
g, 48	3.464	4.037	-10.357
g, 54	3.275	4.058	-10.61
MCS0, 20MHz	1.987	3.22	-12.684
MCS1, 20MHz	1.445	2.758	-13.228
MCS2, 20MHz	2.1	2.778	-12.527
MCS3, 20MHz	2.145	2.368	-12.354
MCS4, 20MHz	2.859	3.113	-11.773
MCS5, 20MHz	2.483	1.785	-12.076
MCS6, 20MHz	2.439	2.012	-11.696
MCS7, 20MHz	2.295	1.638	-11.913

Mode	Frequency (MHz)		
	2422	2437	2452
MCS0, 40MHz	2.466	2.168	2.258
MCS1, 40MHz	1.36	2.123	1.093
MCS2, 40MHz	1.412	1.459	0.815
MCS3, 40MHz	1.224	1.161	0.888
MCS4, 40MHz	1.149	1.167	1.477
MCS5, 40MHz	1.406	0.915	1.274
MCS6, 40MHz	1.156	0.82	0.66
MCS7, 40MHz	0.534	0.311	0.241

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	40 for the board (30 for the module)
Mode	See Below
Transmit Frequency	See Below
Parameters	99% bandwidth
Notes	For all WiFi modes

Mode	Frequency (MHz)		
	2412	2437	2472
b, 1	14.6	14.5	14.6
b, 2	14.6	14.5	14.6
b, 5.5	14.6	14.5	14.5
b, 11	14.5	14.5	14.5
g, 6	16.6	16.6	16.6
g, 9	16.6	16.6	16.6
g, 12	16.6	16.7	16.5
g, 18	16.5	16.5	16.5
g, 24	16.5	16.5	16.5
g, 36	16.5	16.5	16.5
g, 48	16.5	16.5	16.5
g, 54	16.5	16.5	16.5
MCS0, 20MHz	17.7	17.7	17.7
MCS1, 20MHz	17.7	17.7	17.7
MCS2, 20MHz	17.7	17.7	17.7
MCS3, 20MHz	17.7	17.7	17.7
MCS4, 20MHz	17.7	17.7	17.7
MCS5, 20MHz	17.7	17.7	17.7
MCS6, 20MHz	17.7	17.7	17.7
MCS7, 20MHz	17.7	17.7	17.7

Mode	Frequency (MHz)		
	2422	2437	2452
MCS0, 40MHz	36.25	36.50	36.25
MCS1, 40MHz	36.25	36.25	35.75
MCS2, 40MHz	36.00	36.00	36.00
MCS3, 40MHz	36.00	36.25	36.00
MCS4, 40MHz	36.25	36.00	36.00
MCS5, 40MHz	36.25	36.25	36.25
MCS6, 40MHz	36.00	36.00	36.00
MCS7, 40MHz	36.25	36.25	36.25

802.11b, 1MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	10.150000	0.500000	---	2406.925000	2417.075000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	6.4	PASS

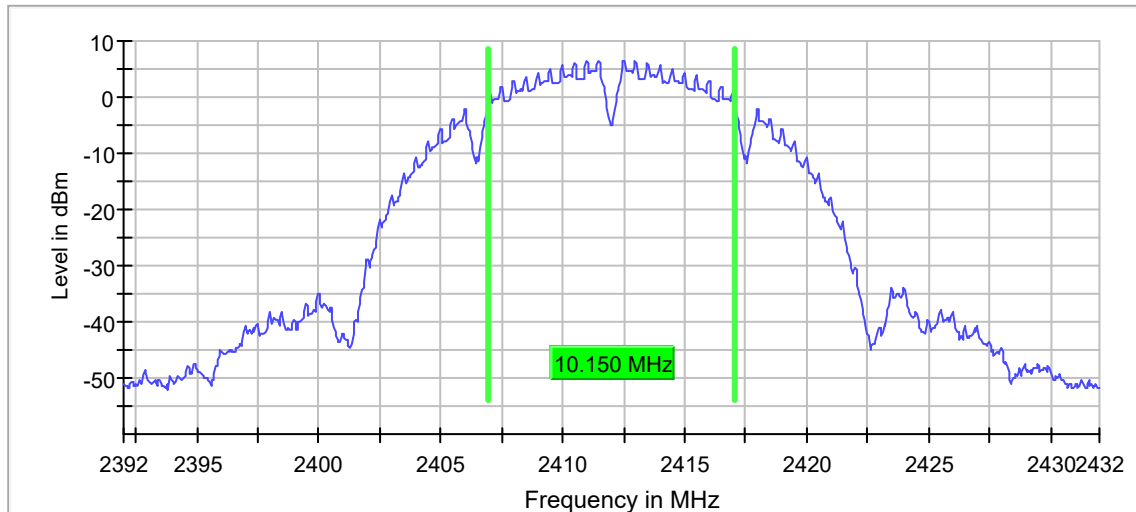

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.04 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	18.9	30.0	PASS

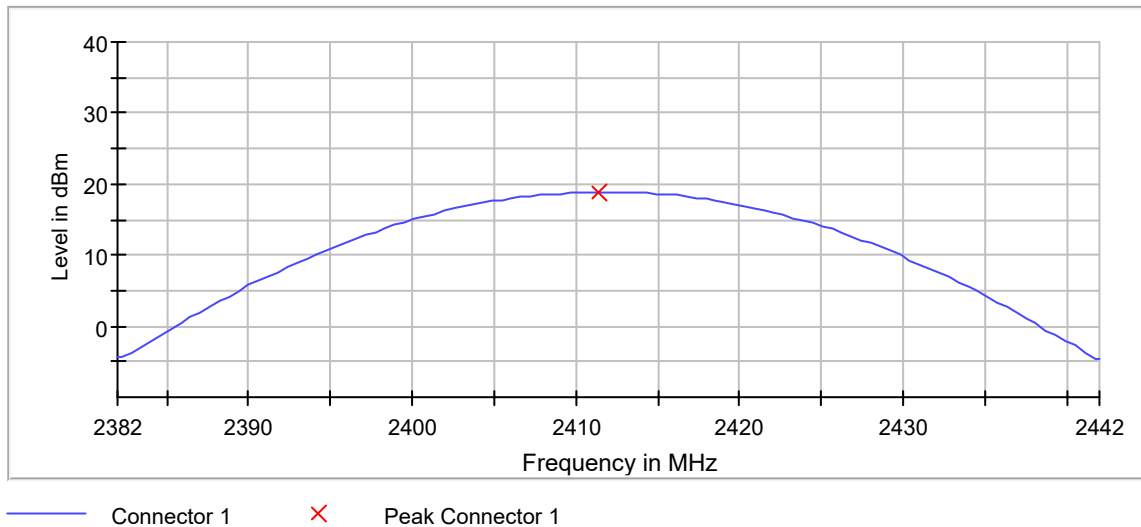

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 10.150 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2411.475000	6.355	8.0	PASS

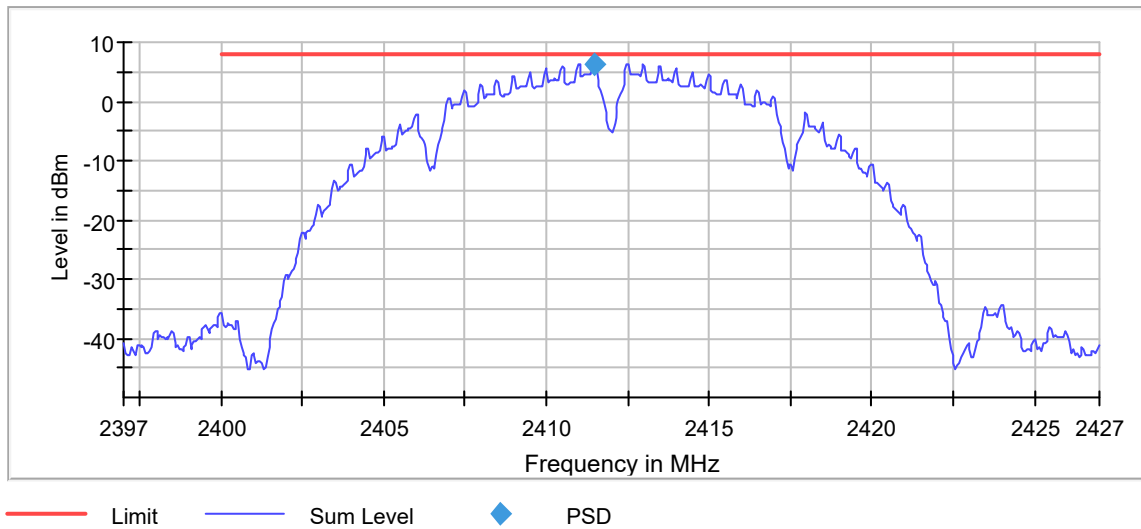

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.15 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	14.600000	---	---	2404.750000	2419.350000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

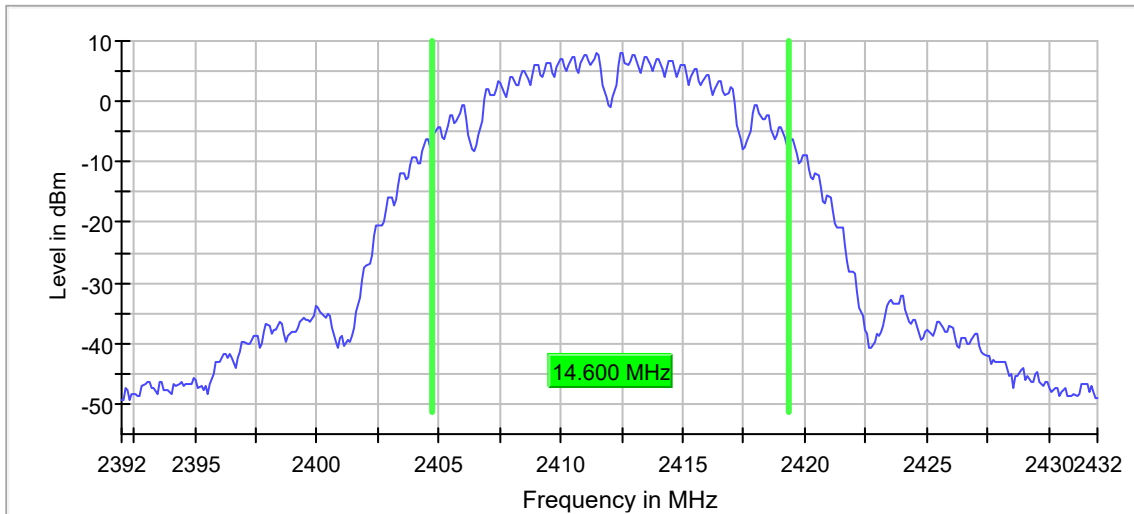

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweptime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2412.475000	7.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-34.5	21.6	-12.9	PASS
2399.925000	-35.2	22.3	-12.9	PASS
2399.875000	-35.5	22.5	-12.9	PASS
2399.475000	-35.8	22.9	-12.9	PASS
2399.425000	-36.2	23.3	-12.9	PASS
2399.825000	-36.5	23.5	-12.9	PASS
2399.525000	-36.6	23.6	-12.9	PASS
2399.675000	-36.6	23.7	-12.9	PASS
2399.775000	-36.7	23.8	-12.9	PASS
2399.625000	-36.8	23.8	-12.9	PASS
2398.475000	-37.1	24.1	-12.9	PASS
2399.575000	-37.2	24.3	-12.9	PASS
2397.975000	-37.3	24.3	-12.9	PASS
2399.725000	-37.3	24.4	-12.9	PASS
2398.025000	-37.5	24.6	-12.9	PASS

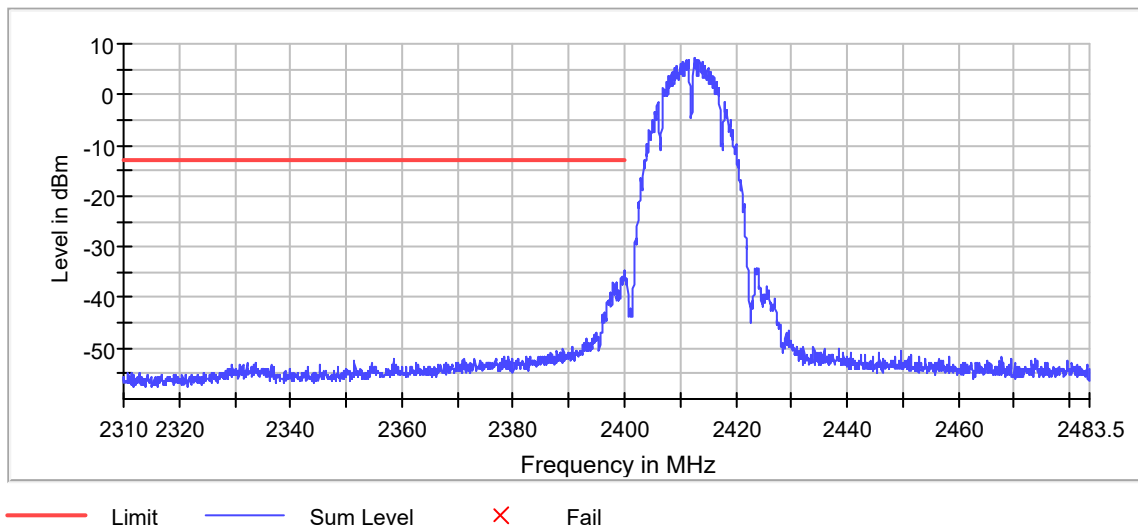

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	10.150000	0.500000	---	2431.925000	2442.075000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	7.3	PASS

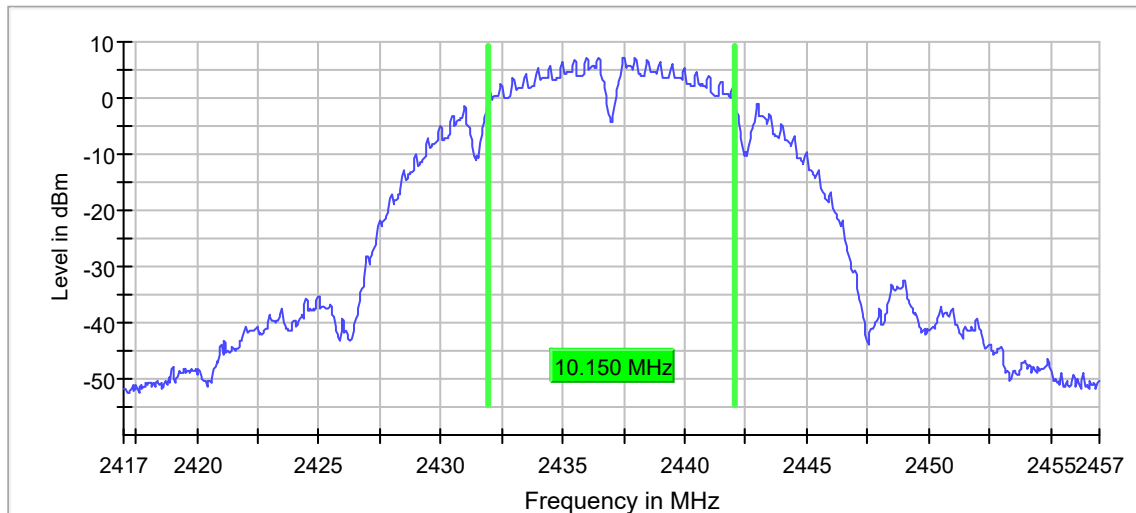

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	20.4	30.0	PASS

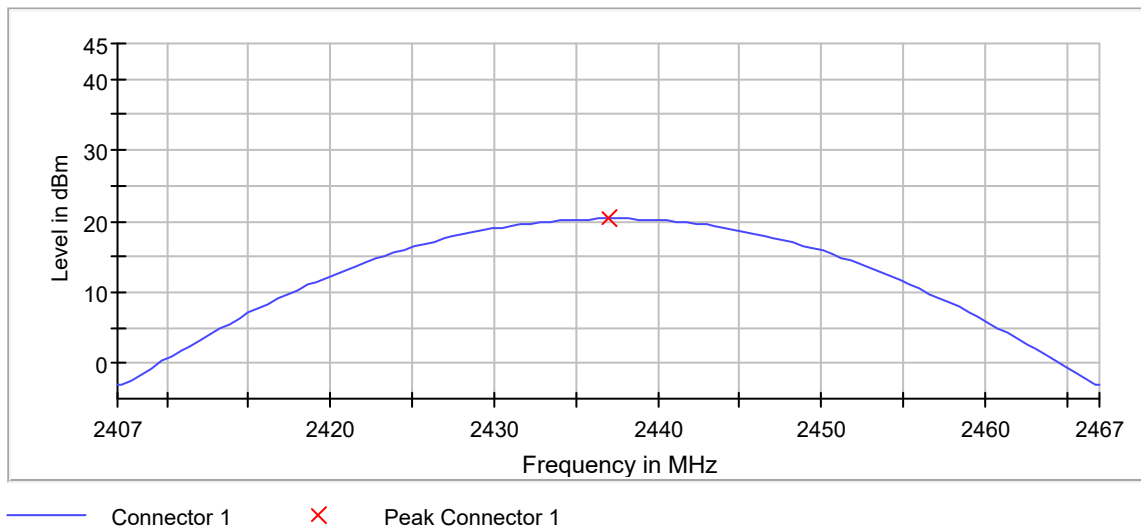

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 10.150 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2437.475000	7.654	8.0	PASS

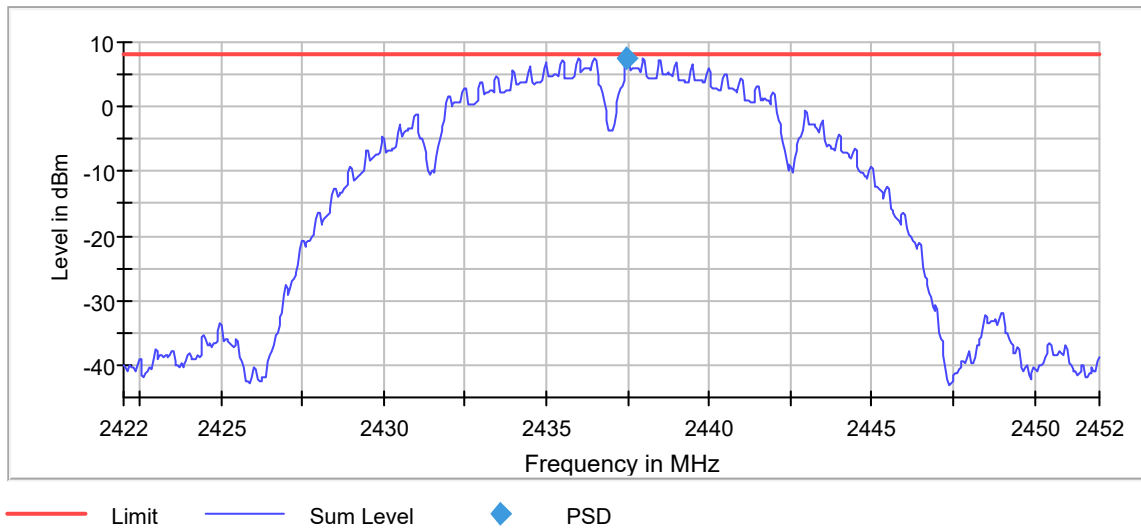

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.07 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	14.500000	---	---	2429.750000	2444.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

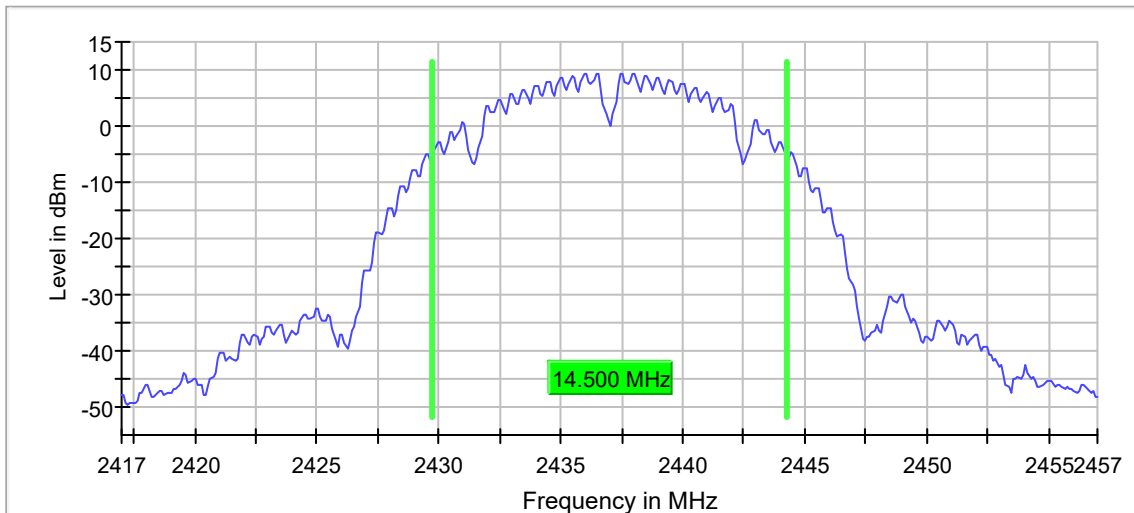

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	10.100000	0.500000	---	2466.925000	2477.025000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	3.6	PASS

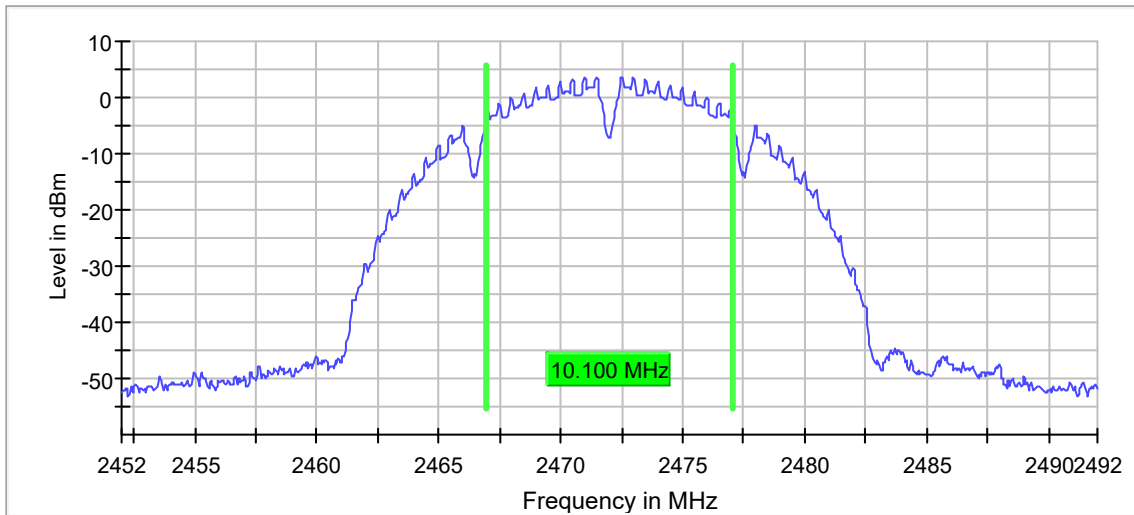

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.16 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	16.1	30.0	PASS

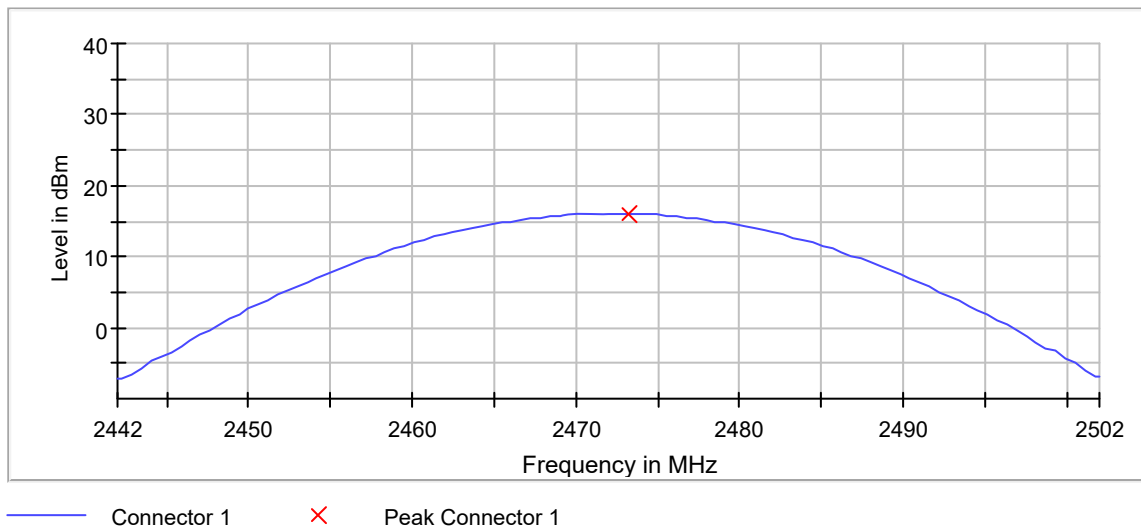

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 10.100 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2472.475000	3.552	8.0	PASS

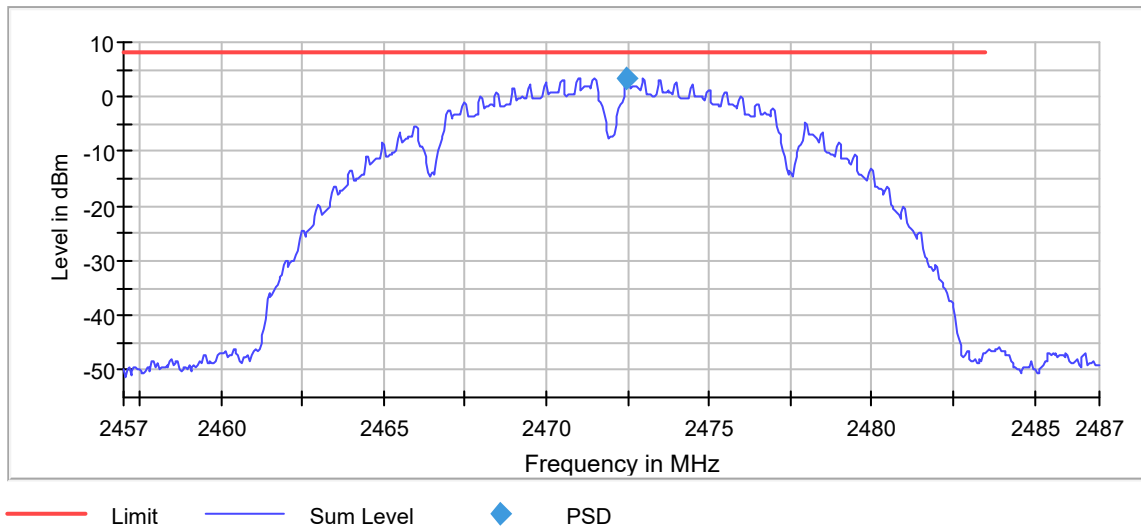

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.40 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	14.600000	---	---	2464.650000	2479.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

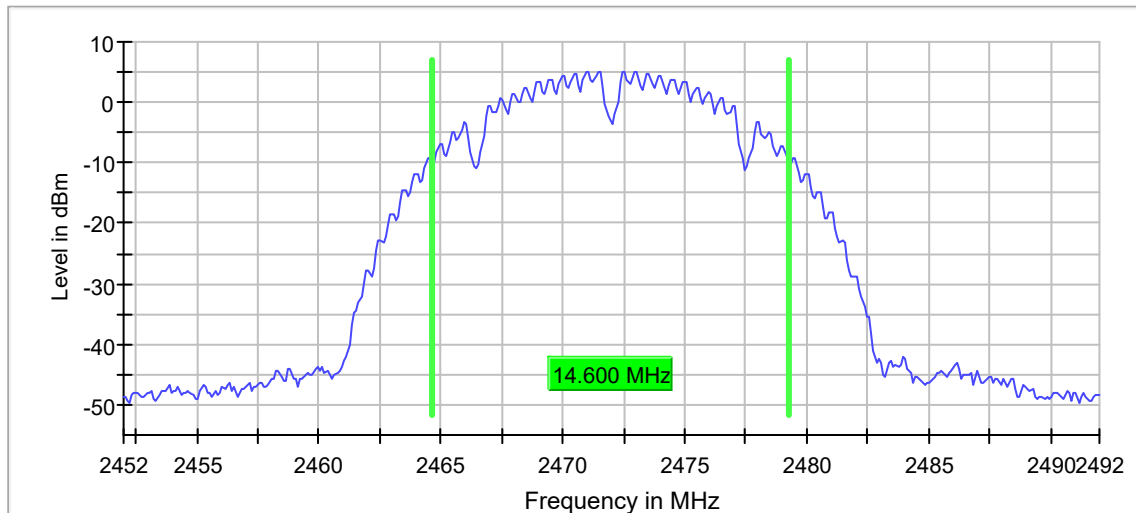

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

802.11b, 2MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	9.350000	0.500000	---	2407.525000	2416.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	5.8	PASS

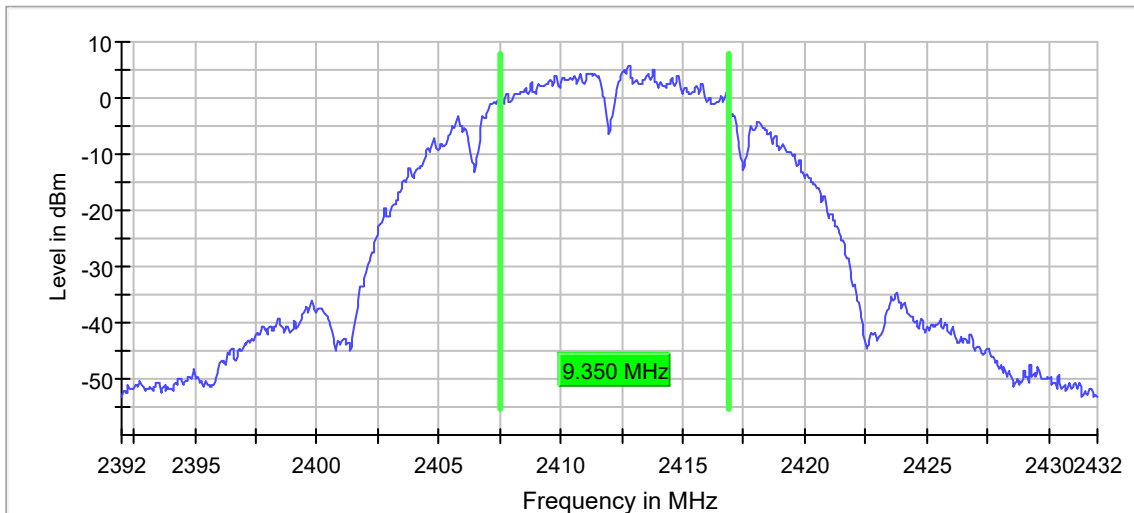

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	18.8	30.0	PASS

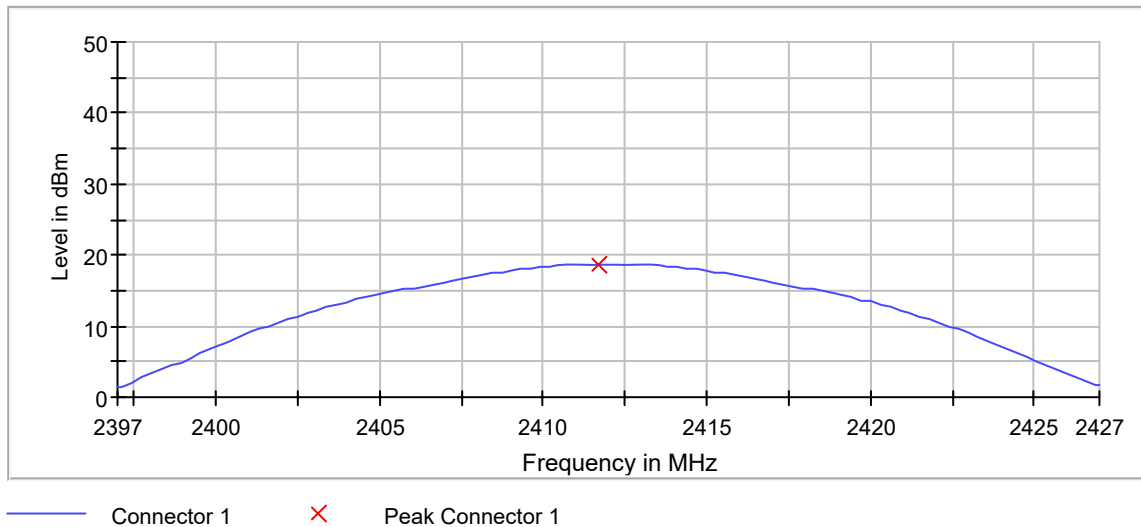

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	10.000 MHz	>= 9.350 MHz
VBW	30.000 MHz	>= 30.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2412.825000	6.323	8.0	PASS

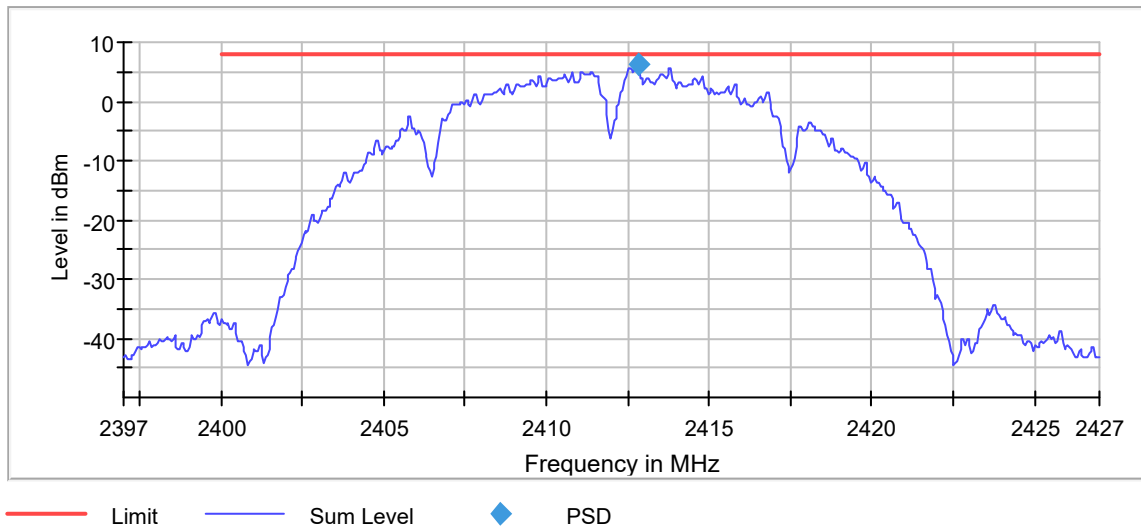

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.16 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	14.600000	---	---	2404.650000	2419.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

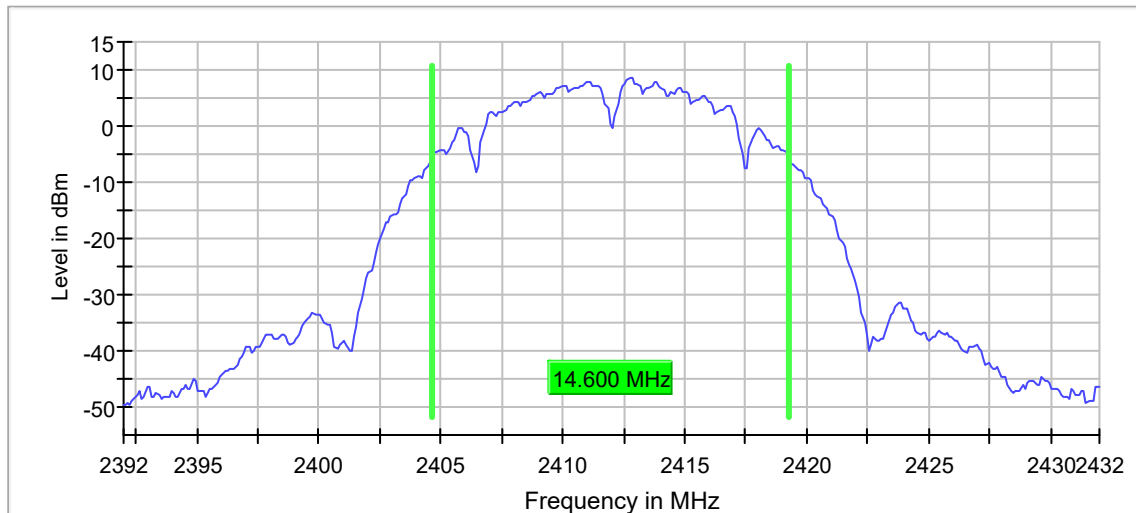

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2412.775000	7.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-34.1	21.2	-12.9	PASS
2399.725000	-34.2	21.3	-12.9	PASS
2399.825000	-34.5	21.6	-12.9	PASS
2399.675000	-35.1	22.3	-12.9	PASS
2399.875000	-35.8	22.9	-12.9	PASS
2399.575000	-35.9	23.0	-12.9	PASS
2399.525000	-35.9	23.1	-12.9	PASS
2399.475000	-36.1	23.2	-12.9	PASS
2399.625000	-36.1	23.3	-12.9	PASS
2399.925000	-36.2	23.4	-12.9	PASS
2399.975000	-36.6	23.7	-12.9	PASS
2399.425000	-36.7	23.9	-12.9	PASS
2399.225000	-37.6	24.7	-12.9	PASS
2399.375000	-37.6	24.8	-12.9	PASS
2399.175000	-37.7	24.9	-12.9	PASS

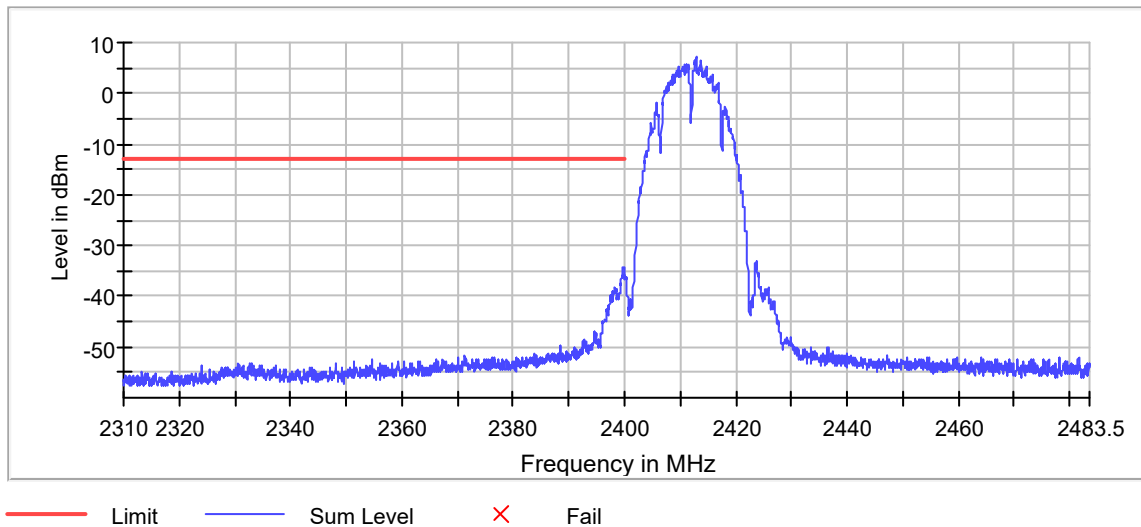

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.24 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	9.150000	0.500000	---	2432.725000	2441.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	6.8	PASS

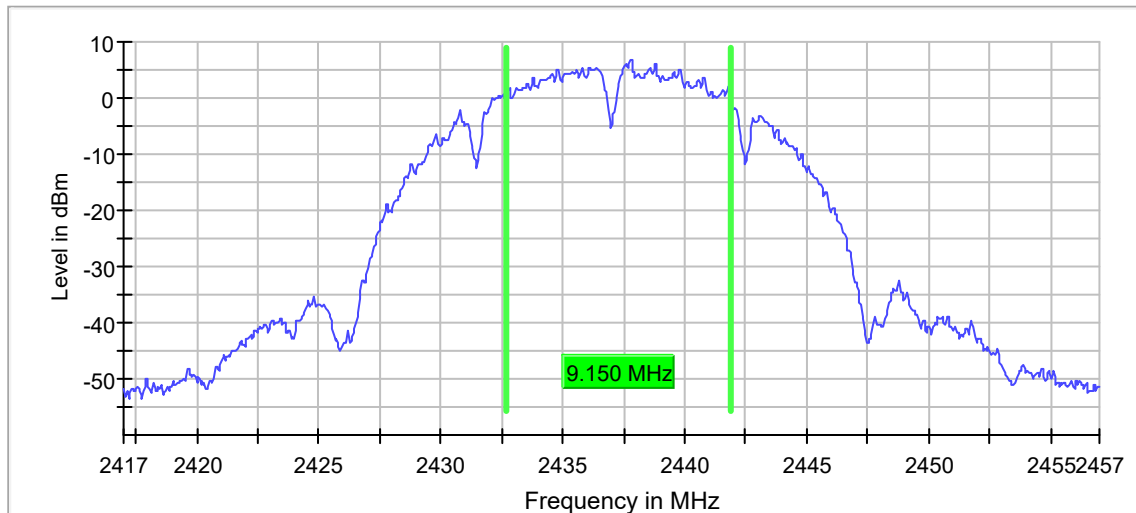

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	19.8	30.0	PASS

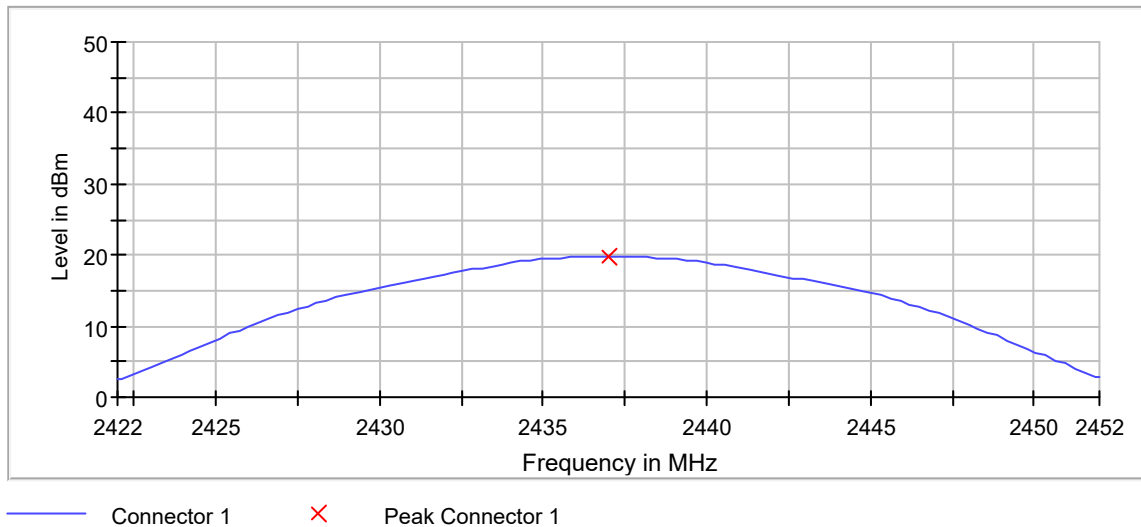

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	10.000 MHz	>= 9.150 MHz
VBW	30.000 MHz	>= 30.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2437.825000	7.224	8.0	PASS

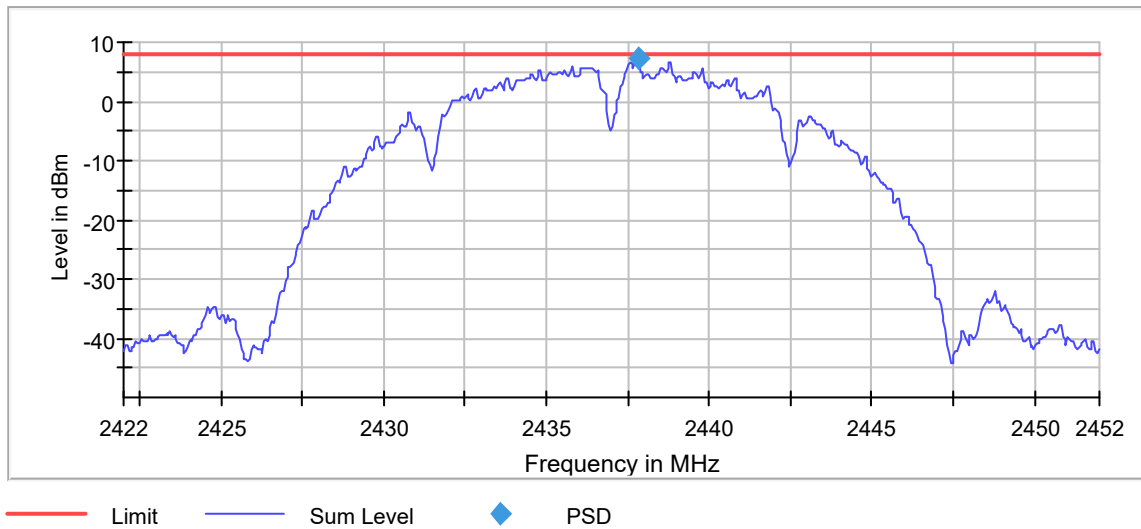

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.13 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	14.500000	---	---	2429.750000	2444.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

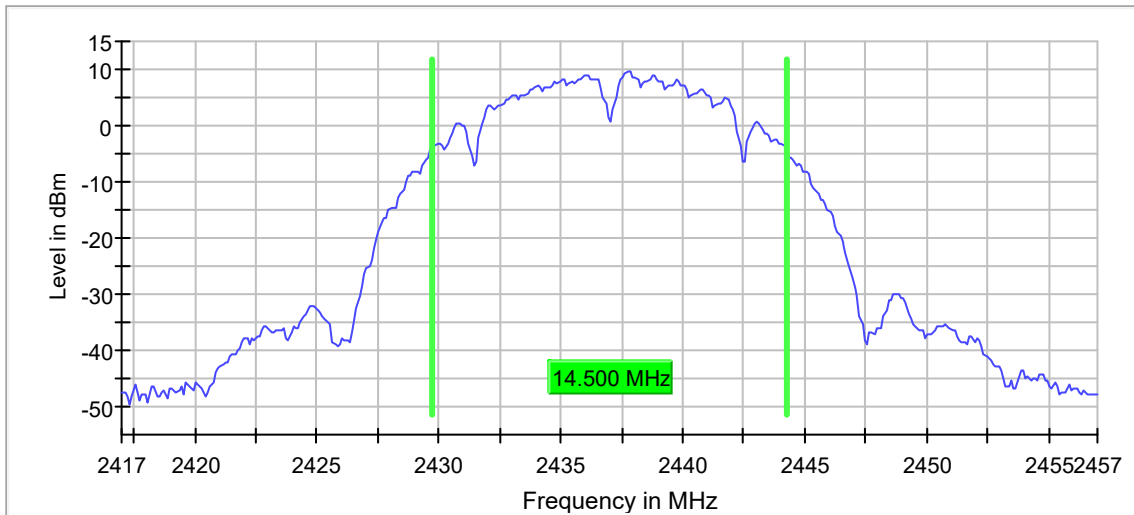

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	9.150000	0.500000	---	2467.725000	2476.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	2.8	PASS

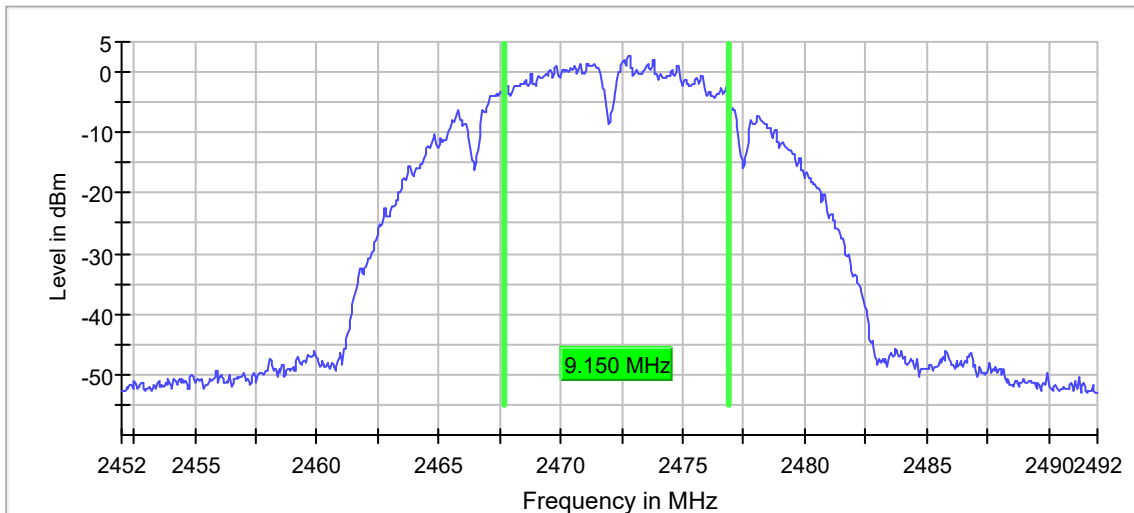

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	15.7	30.0	PASS

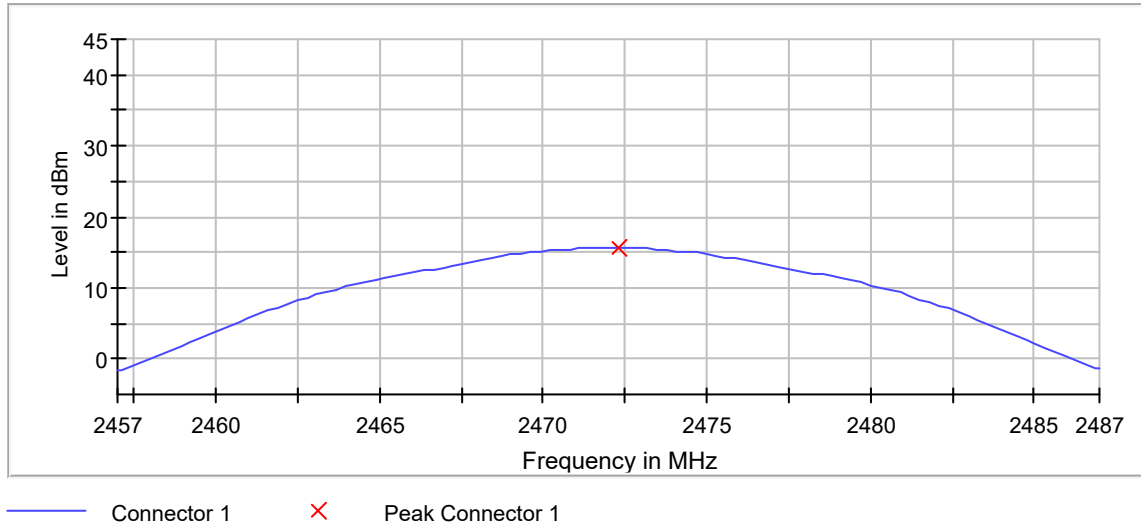

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	10.000 MHz	>= 9.150 MHz
VBW	30.000 MHz	>= 30.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2472.825000	3.261	8.0	PASS

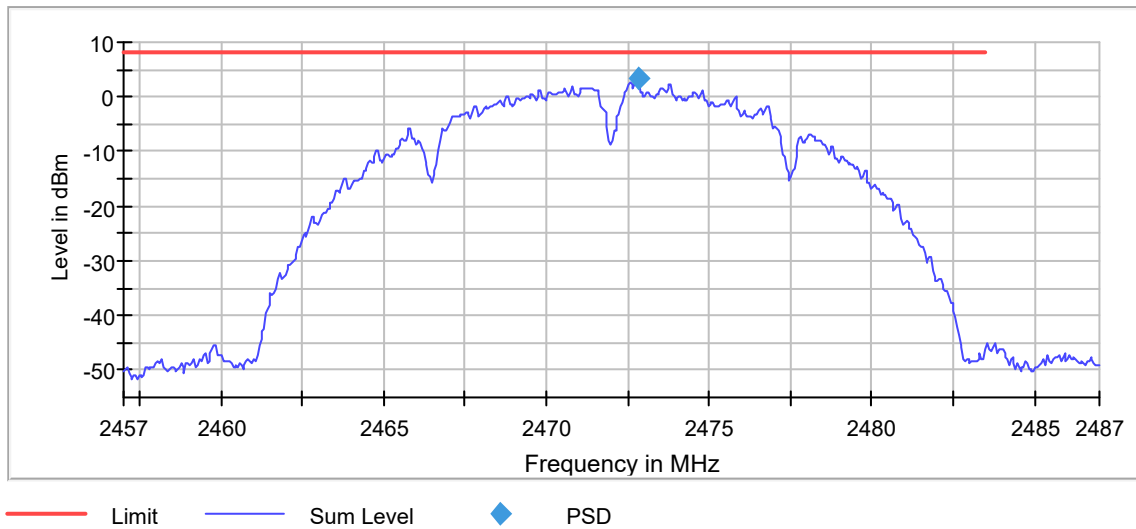

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.24 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	14.600000	---	---	2464.650000	2479.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

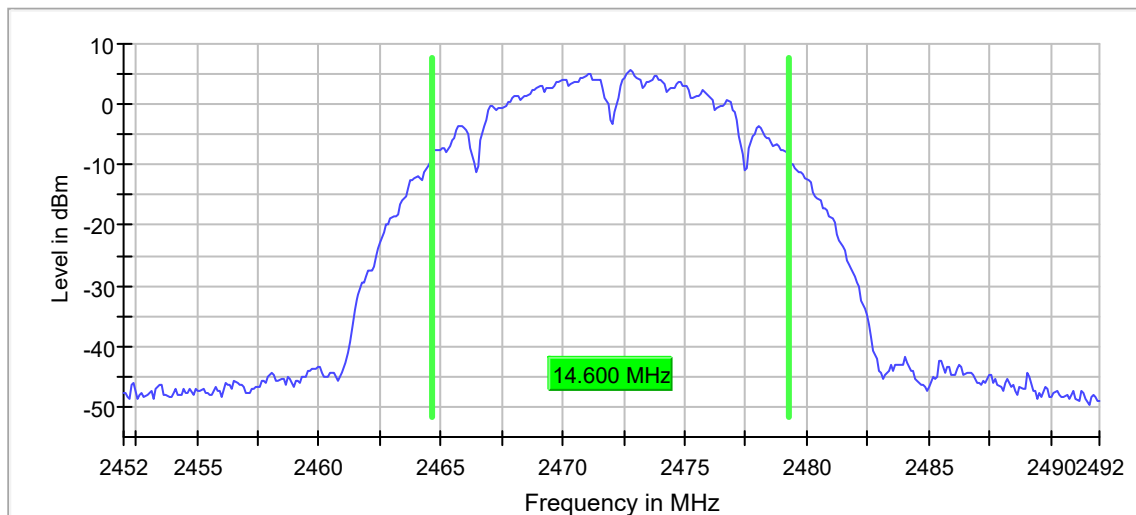

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	10 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

802.11b, 5.5MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	10.200000	0.500000	---	2406.925000	2417.125000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	5.4	PASS

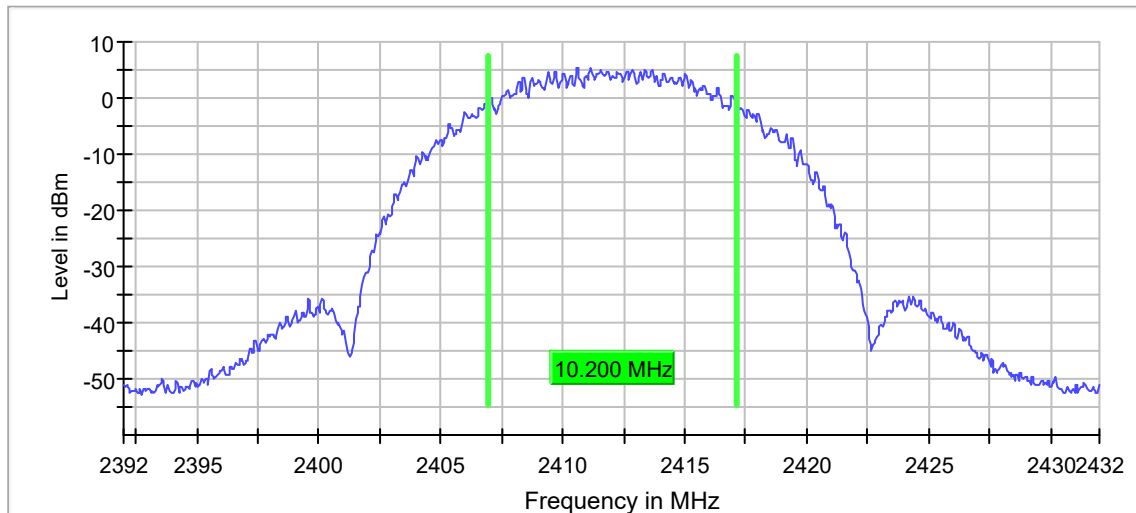

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.06 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	18.9	30.0	PASS

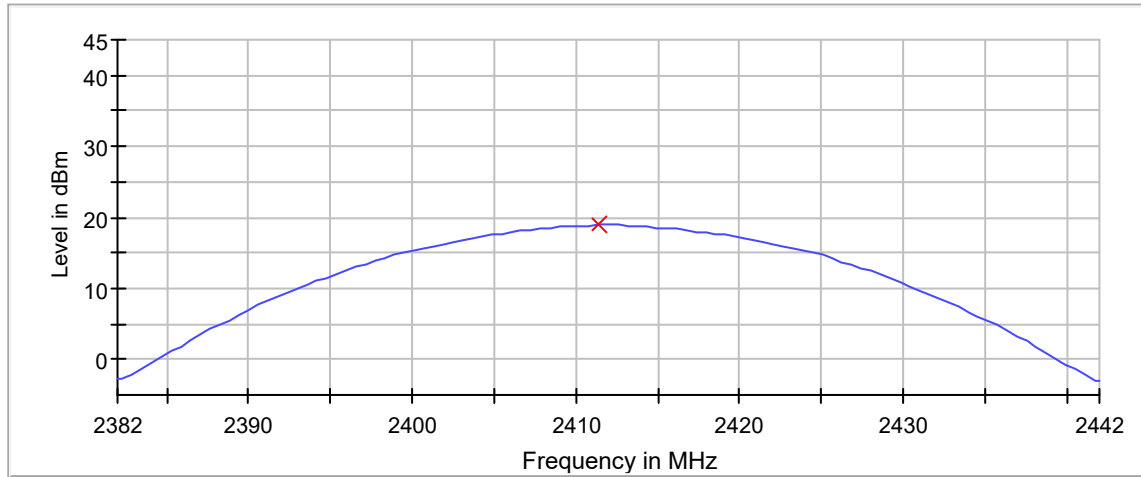

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 10.200 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2410.575000	5.878	8.0	PASS

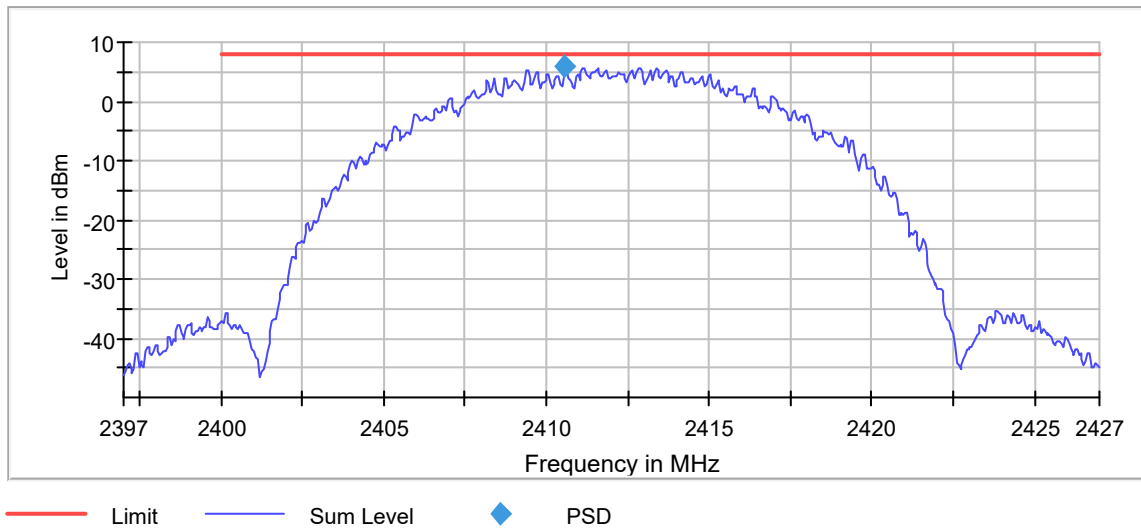

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.09 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	14.600000	---	---	2404.750000	2419.350000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

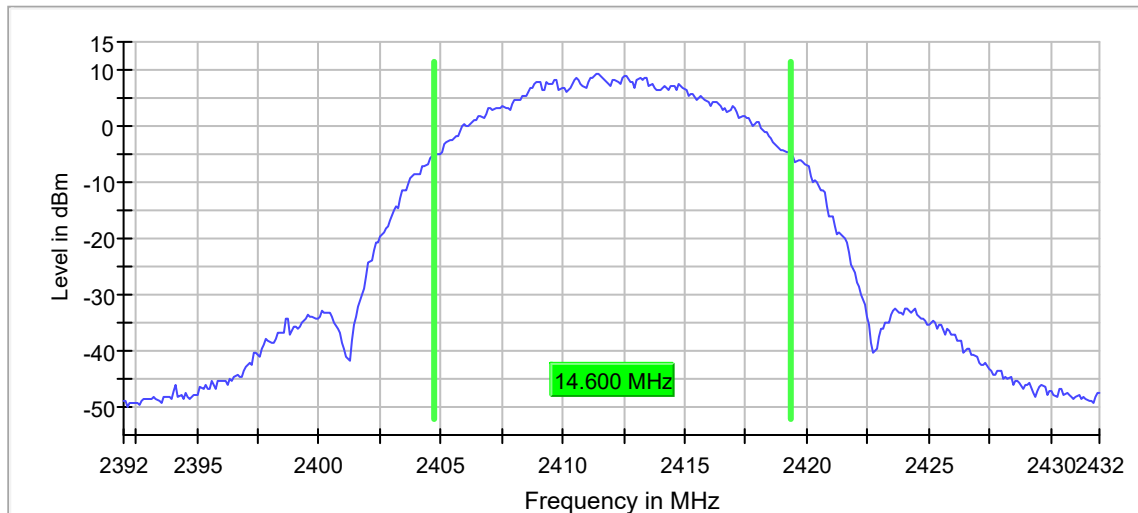

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	12 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.05 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2410.575000	6.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.575000	-34.8	21.4	-13.4	PASS
2399.625000	-35.0	21.6	-13.4	PASS
2399.525000	-35.3	21.9	-13.4	PASS
2399.975000	-35.8	22.4	-13.4	PASS
2399.025000	-35.8	22.4	-13.4	PASS
2399.075000	-35.9	22.5	-13.4	PASS
2399.925000	-36.2	22.8	-13.4	PASS
2399.725000	-36.3	22.9	-13.4	PASS
2399.675000	-36.7	23.3	-13.4	PASS
2399.325000	-36.9	23.5	-13.4	PASS
2398.725000	-37.0	23.6	-13.4	PASS
2399.375000	-37.1	23.7	-13.4	PASS
2399.825000	-37.3	23.9	-13.4	PASS
2398.675000	-37.3	23.9	-13.4	PASS
2399.225000	-37.4	24.0	-13.4	PASS

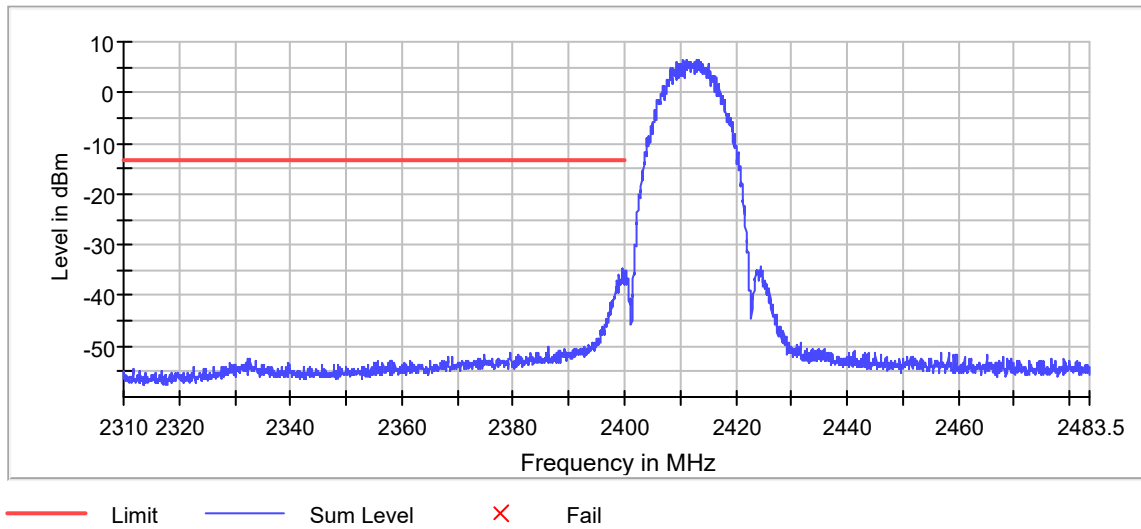

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	10.200000	0.500000	---	2431.925000	2442.125000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	6.4	PASS

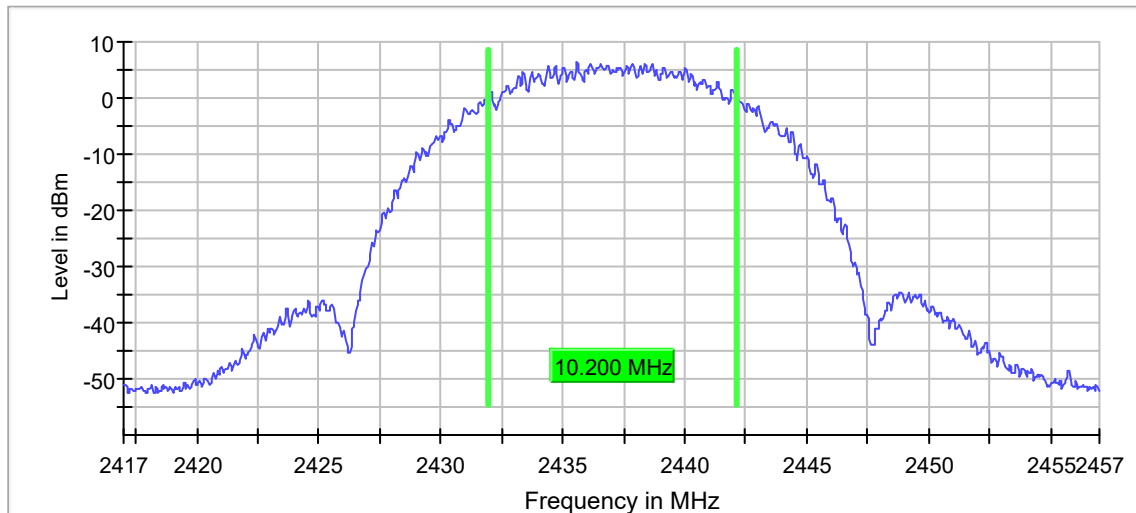

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	20.0	30.0	PASS

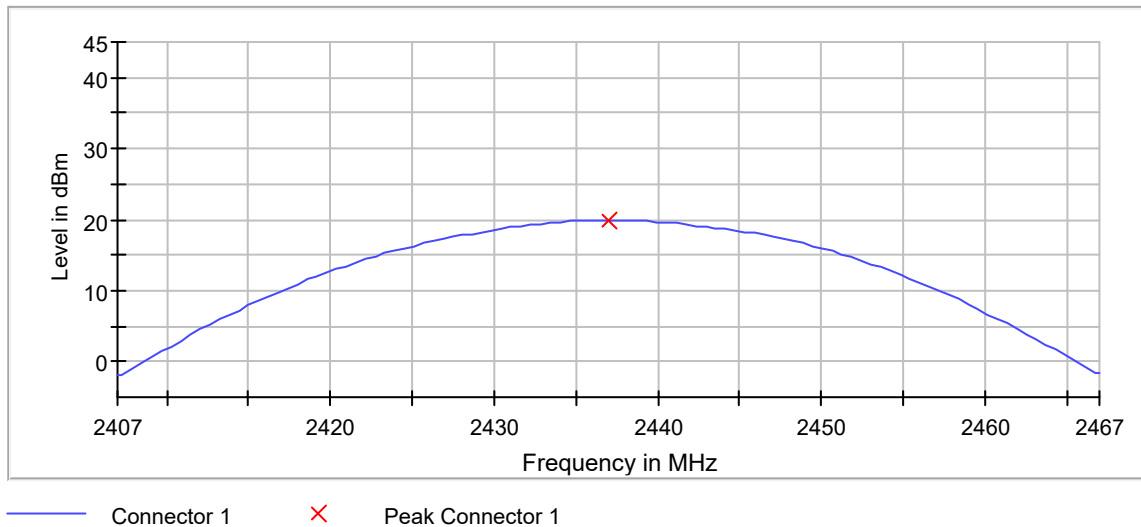

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 10.200 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2435.575000	6.774	8.0	PASS

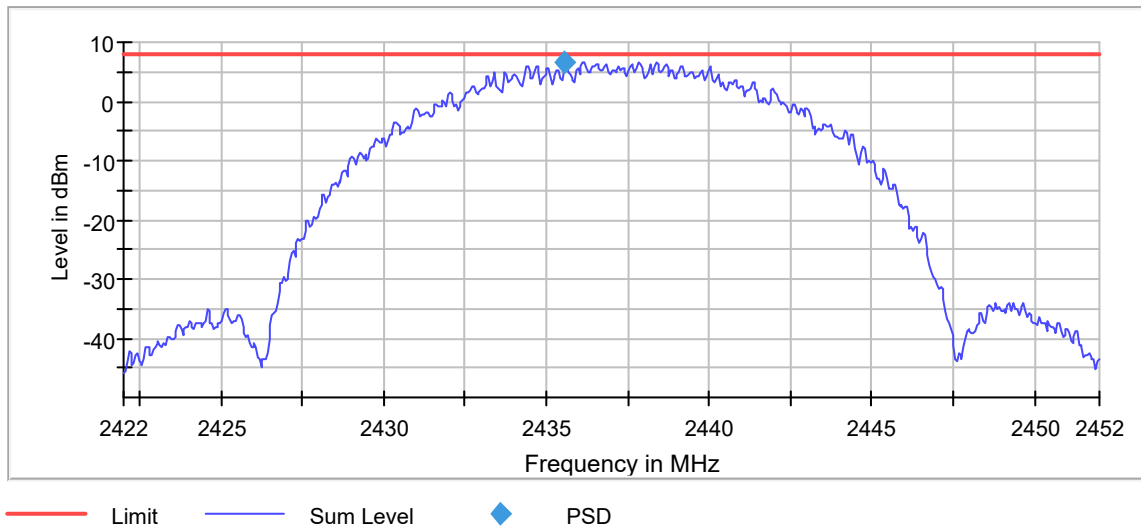

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.08 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	14.500000	---	---	2429.850000	2444.350000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

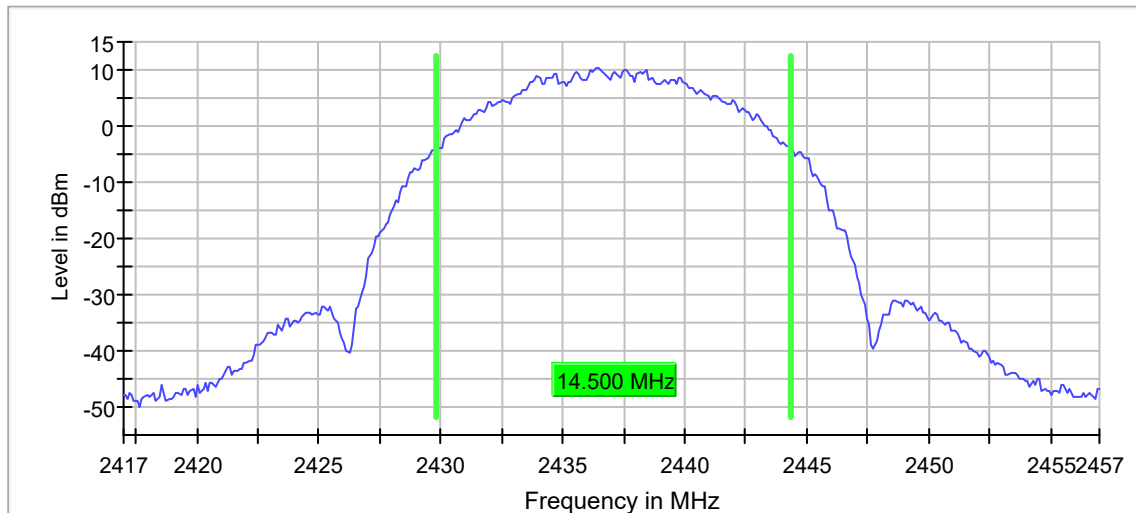

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	10.200000	0.500000	---	2466.925000	2477.125000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	2.9	PASS

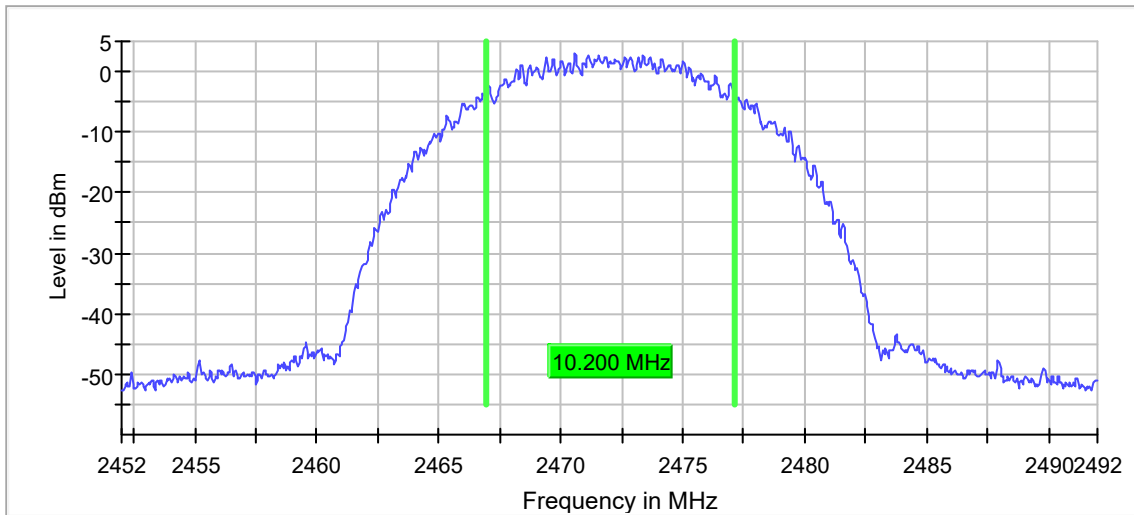

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	15.8	30.0	PASS

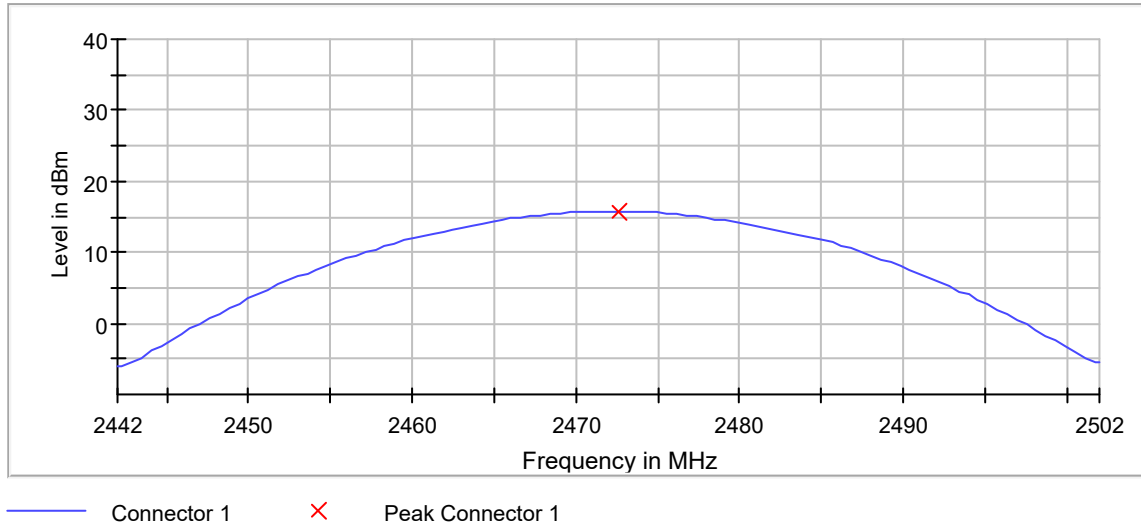

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 10.200 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2470.575000	2.880	8.0	PASS

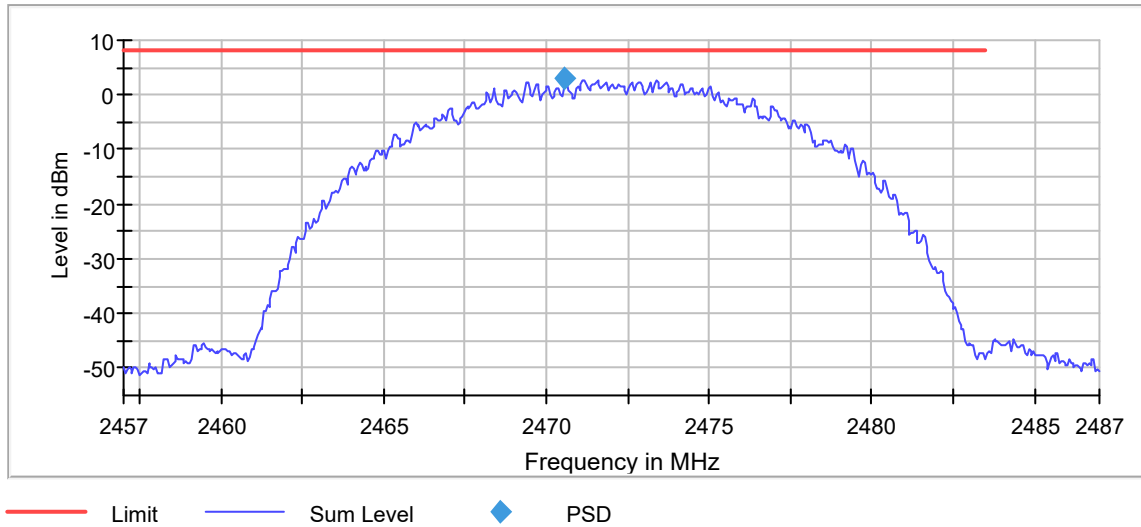

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.16 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	14.500000	---	---	2464.750000	2479.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

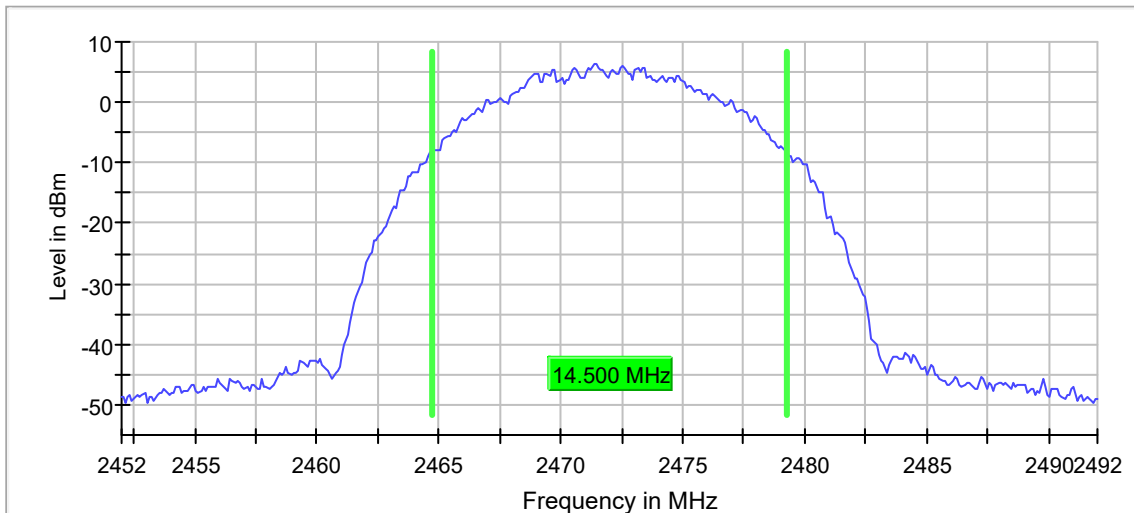

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.30 dB

802.11b, 11MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	8.750000	0.500000	---	2407.575000	2416.325000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	6.9	PASS

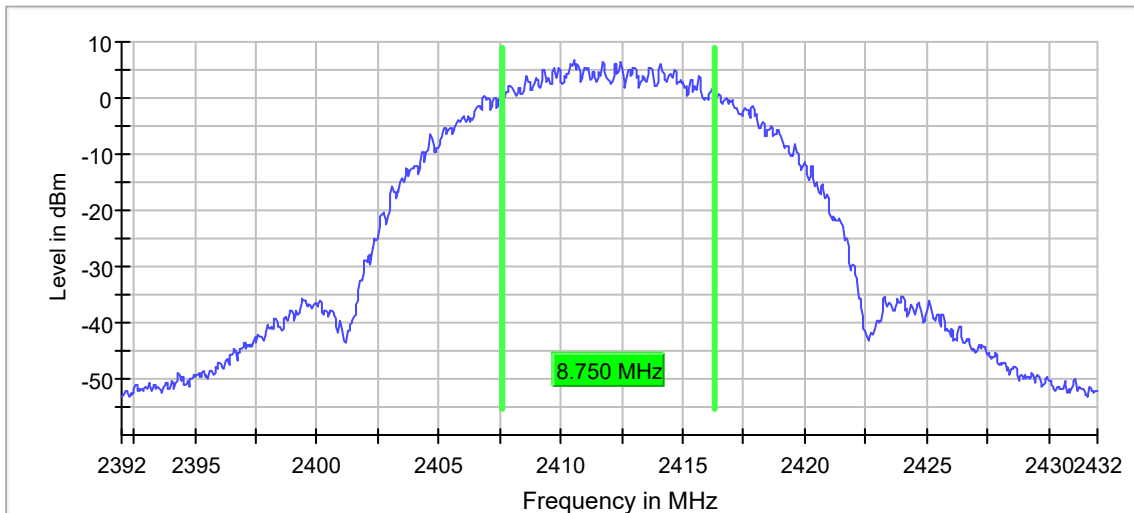

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.10 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	19.4	30.0	PASS

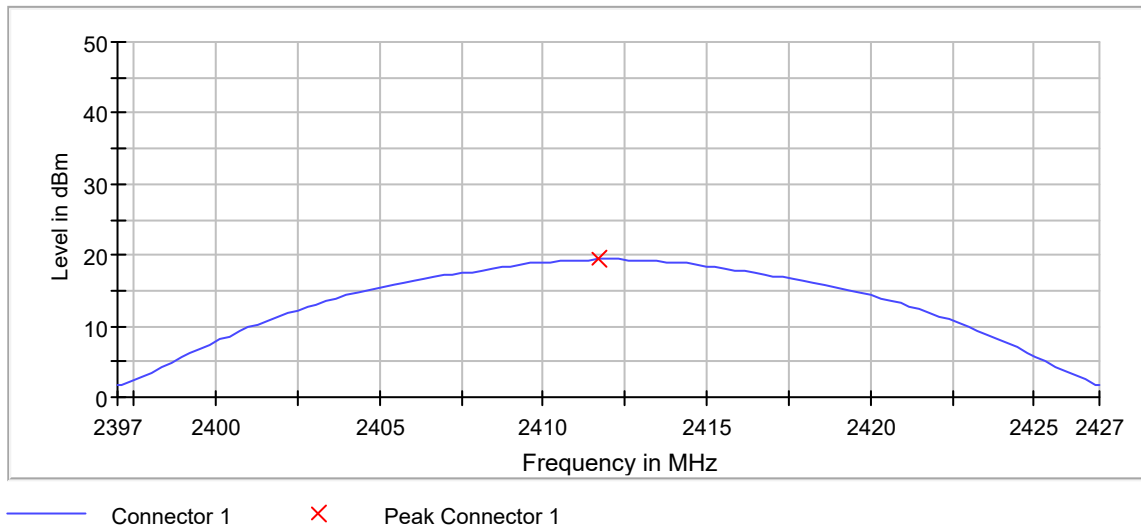

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	10.000 MHz	>= 8.750 MHz
VBW	30.000 MHz	>= 30.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2410.525000	6.923	8.0	PASS

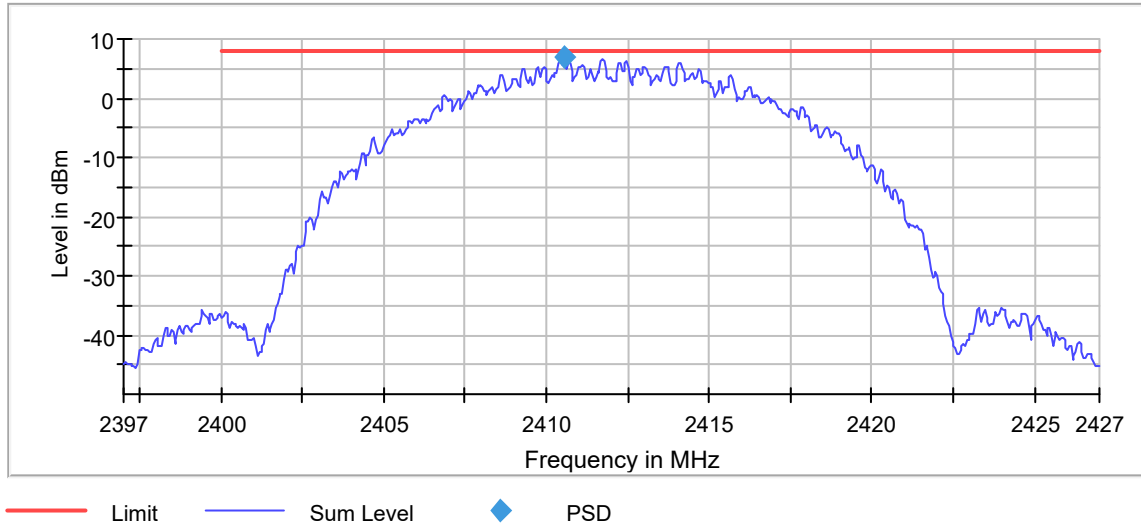

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.11 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	14.500000	---	---	2404.750000	2419.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

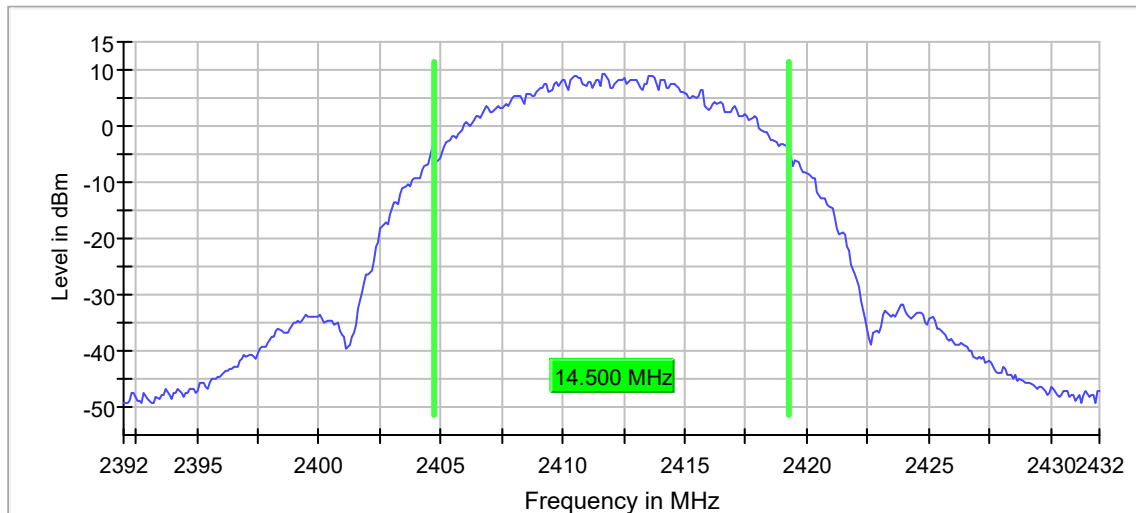

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	10 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2410.525000	7.7

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.375000	-34.8	22.4	-12.3	PASS
2399.425000	-34.9	22.5	-12.3	PASS
2399.525000	-35.5	23.1	-12.3	PASS
2399.875000	-35.5	23.2	-12.3	PASS
2399.825000	-35.6	23.3	-12.3	PASS
2399.725000	-35.6	23.3	-12.3	PASS
2399.925000	-35.7	23.3	-12.3	PASS
2399.975000	-35.7	23.4	-12.3	PASS
2399.475000	-35.9	23.5	-12.3	PASS
2399.675000	-35.9	23.6	-12.3	PASS
2399.575000	-36.3	23.9	-12.3	PASS
2399.775000	-36.5	24.1	-12.3	PASS
2399.175000	-36.6	24.2	-12.3	PASS
2399.275000	-36.7	24.4	-12.3	PASS
2399.225000	-36.9	24.5	-12.3	PASS

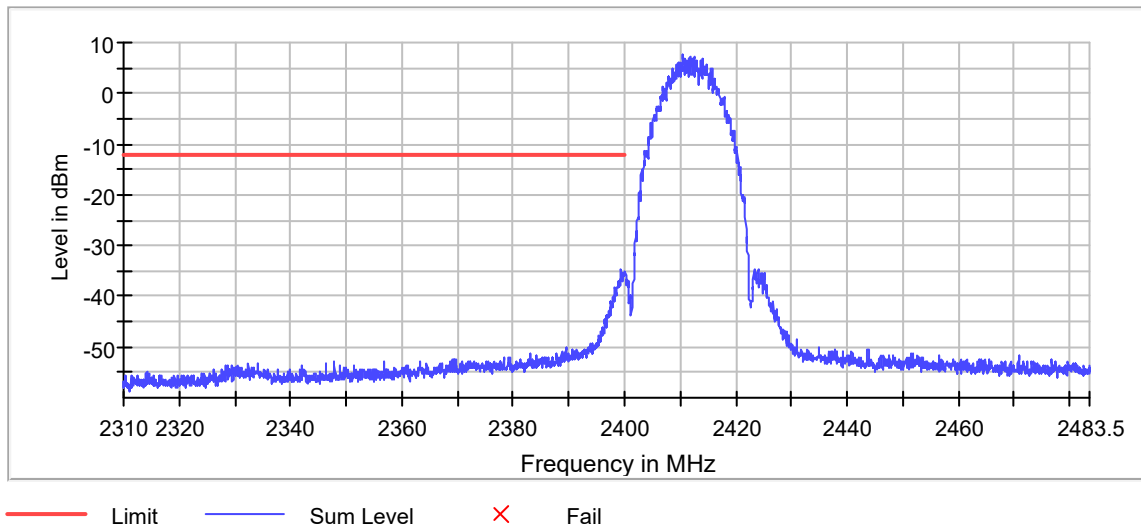

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	8.750000	0.500000	---	2432.575000	2441.325000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	7.5	PASS

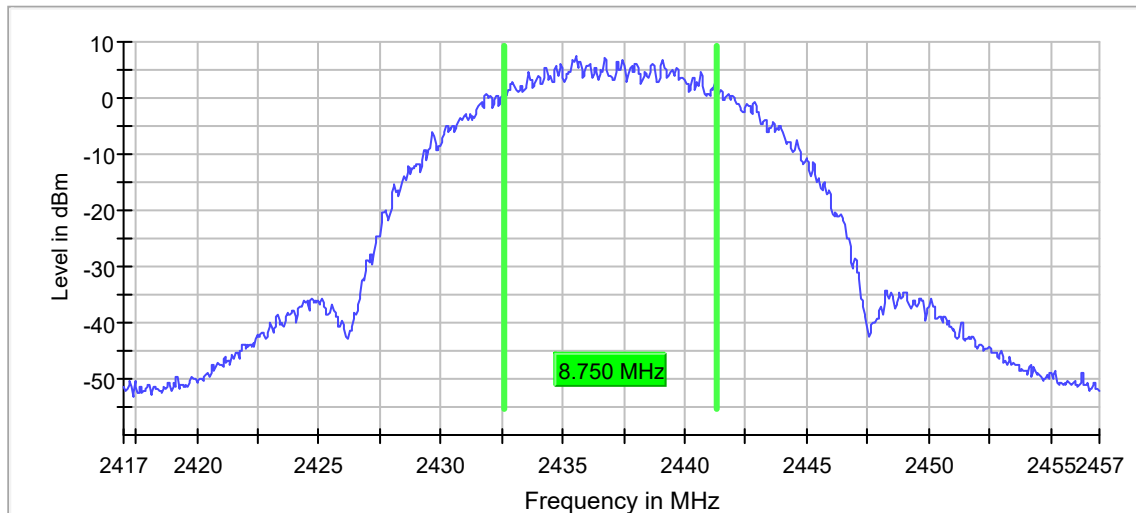

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.08 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	20.5	30.0	PASS

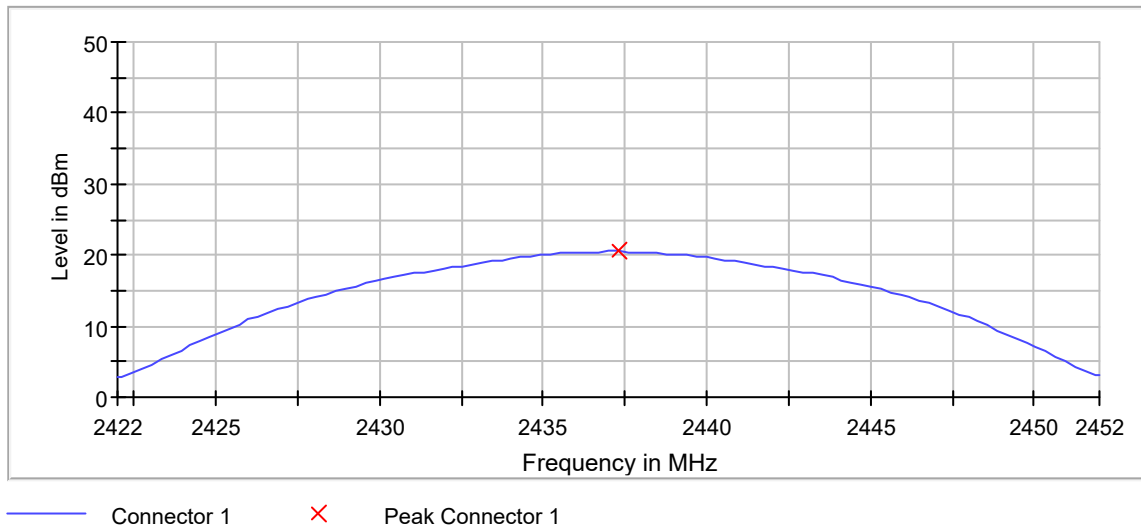

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	10.000 MHz	>= 8.750 MHz
VBW	30.000 MHz	>= 30.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2435.525000	7.826	8.0	PASS

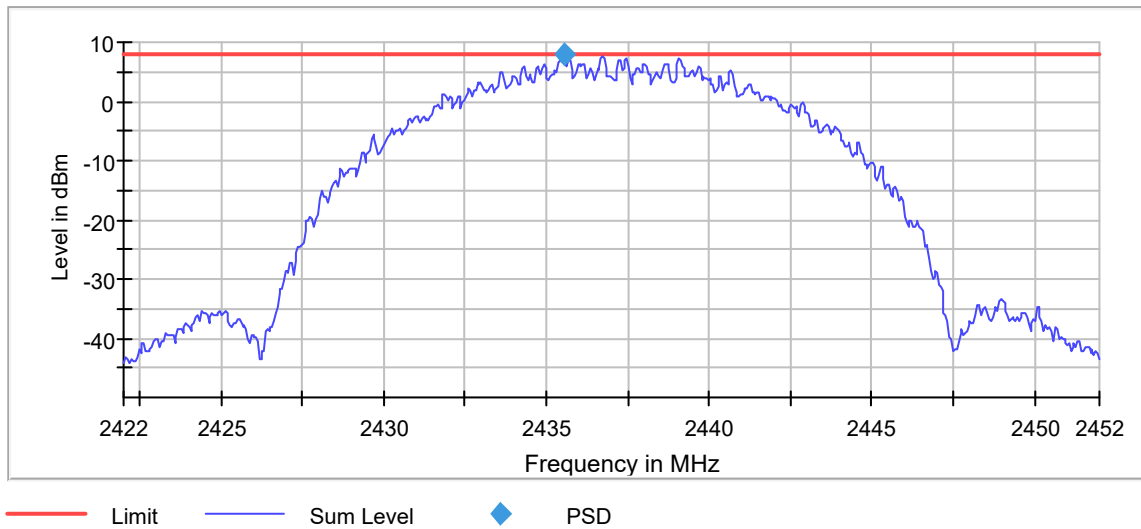

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.48 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	14.500000	---	---	2429.750000	2444.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

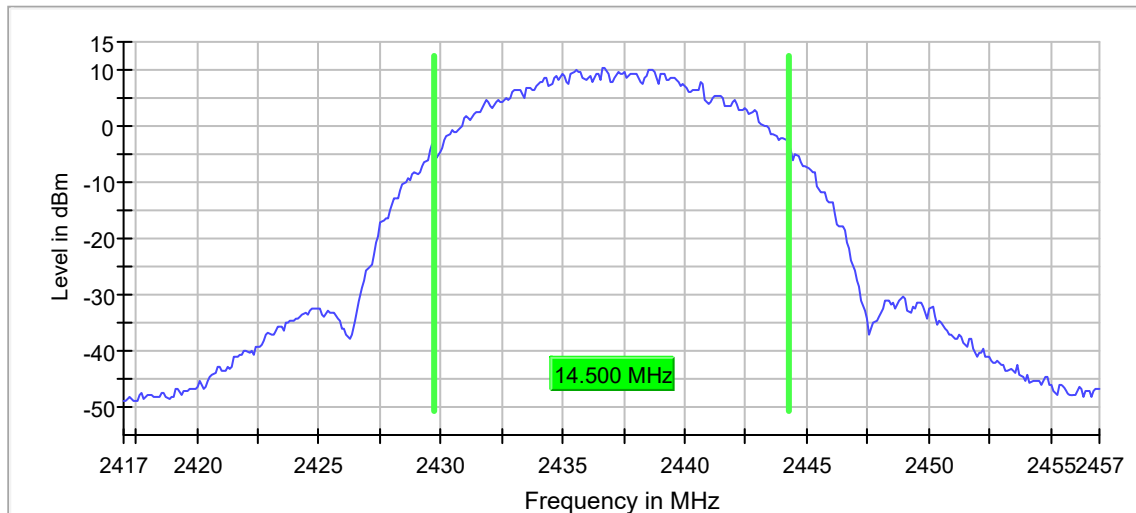

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	8.750000	0.500000	---	2467.575000	2476.325000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	3.4	PASS

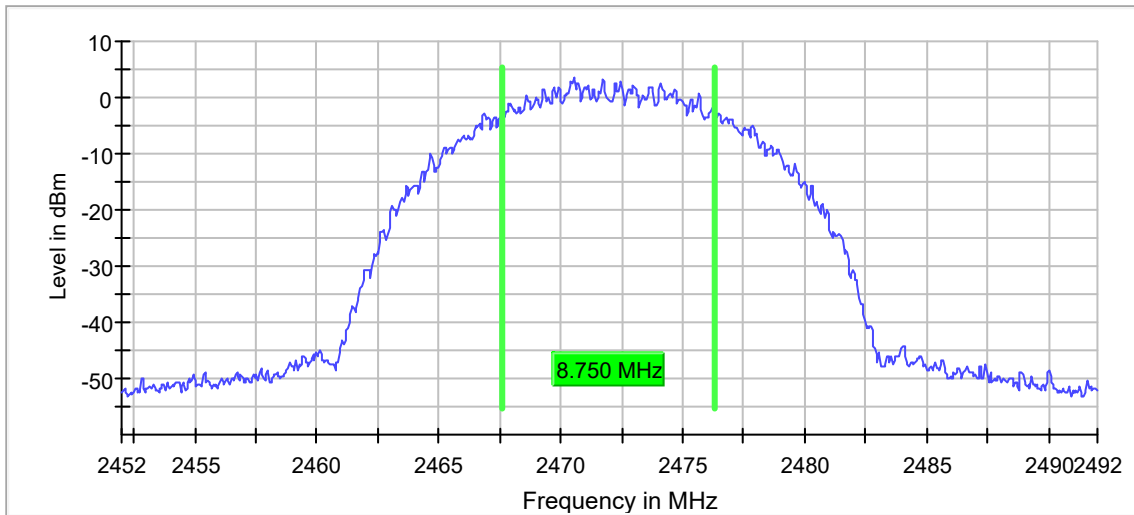

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	16.2	30.0	PASS

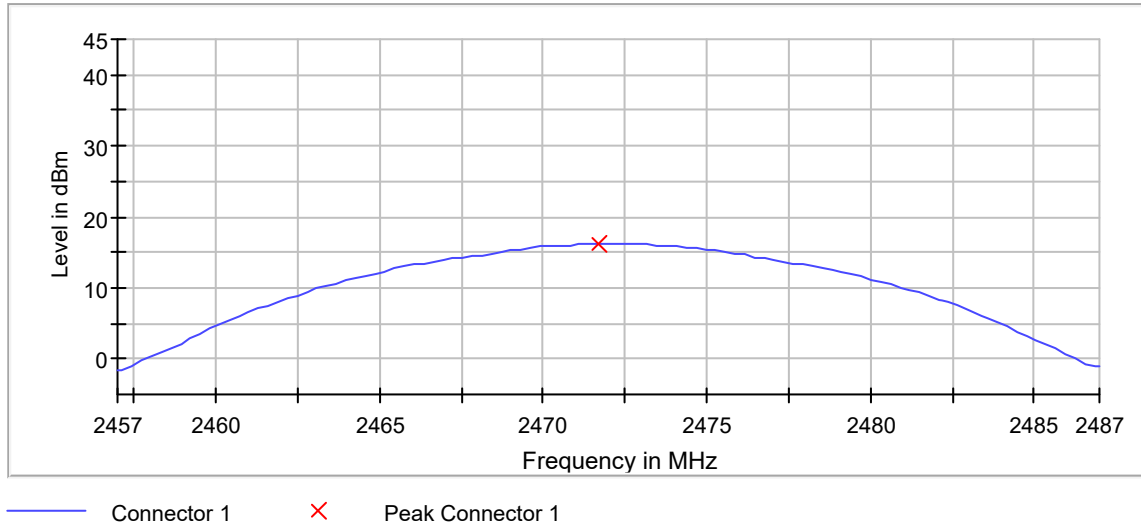

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	10.000 MHz	≥ 8.750 MHz
VBW	30.000 MHz	≥ 30.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2470.525000	3.877	8.0	PASS

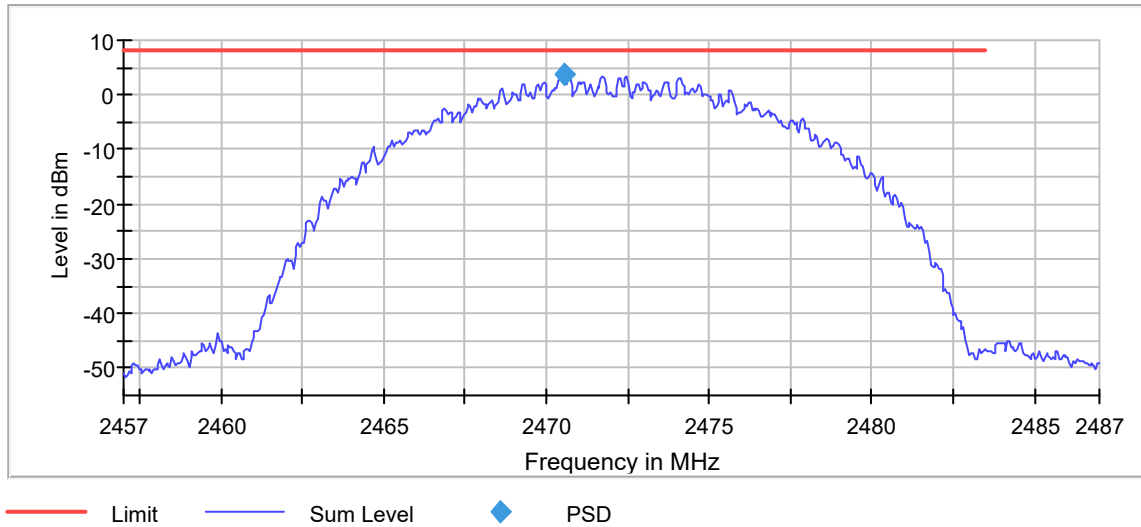

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.13 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	14.500000	---	---	2464.750000	2479.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

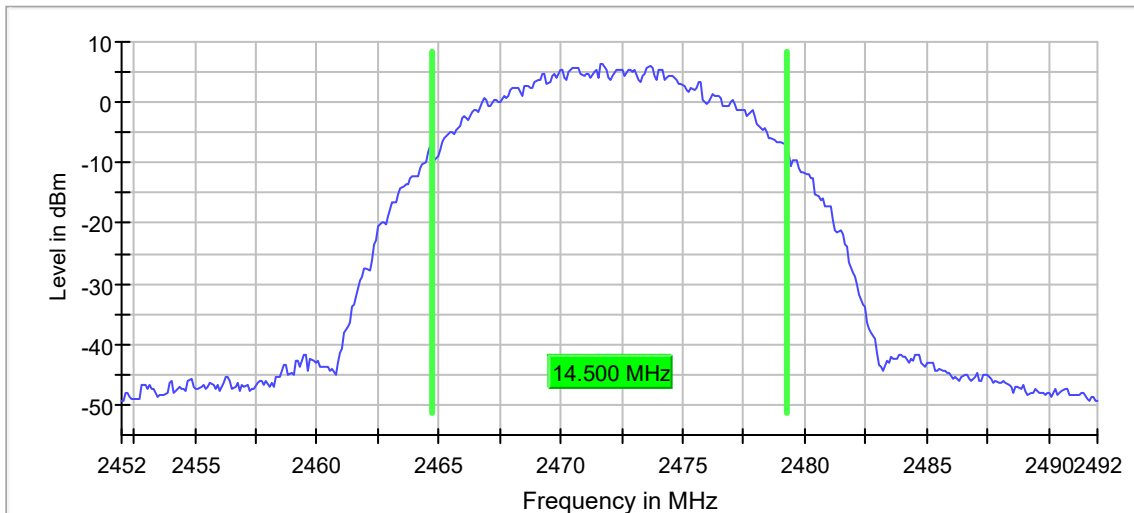

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	12 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

802.11g, 6MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.500000	0.500000	---	2403.725000	2420.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	1.4	PASS

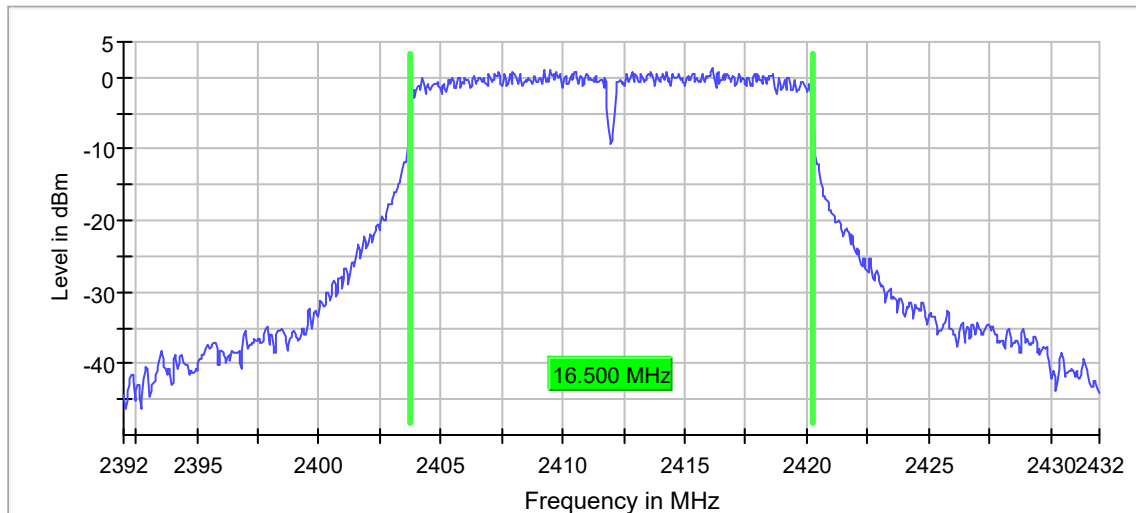

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.9	30.0	PASS

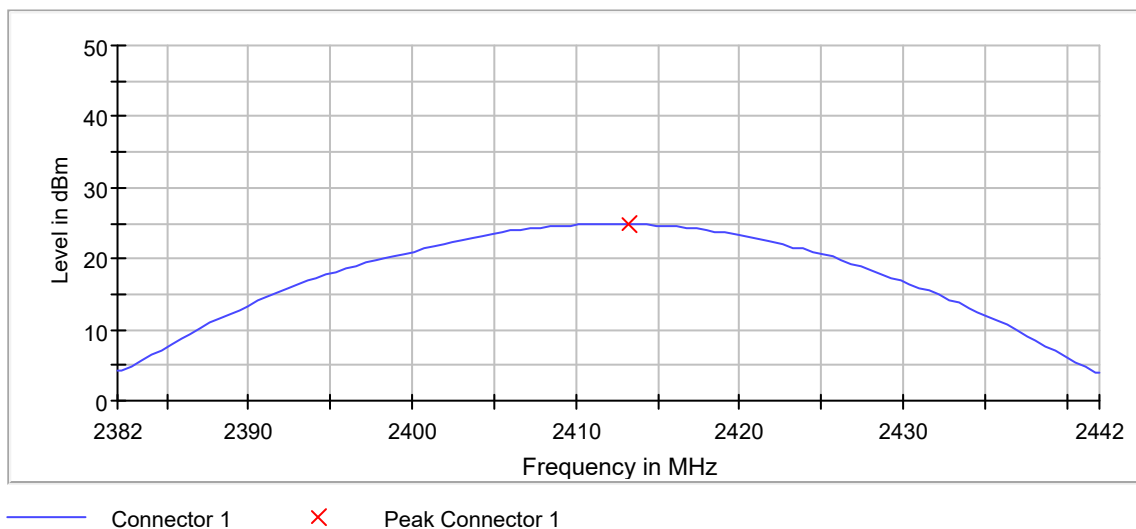

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.500 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2416.125000	1.255	8.0	PASS

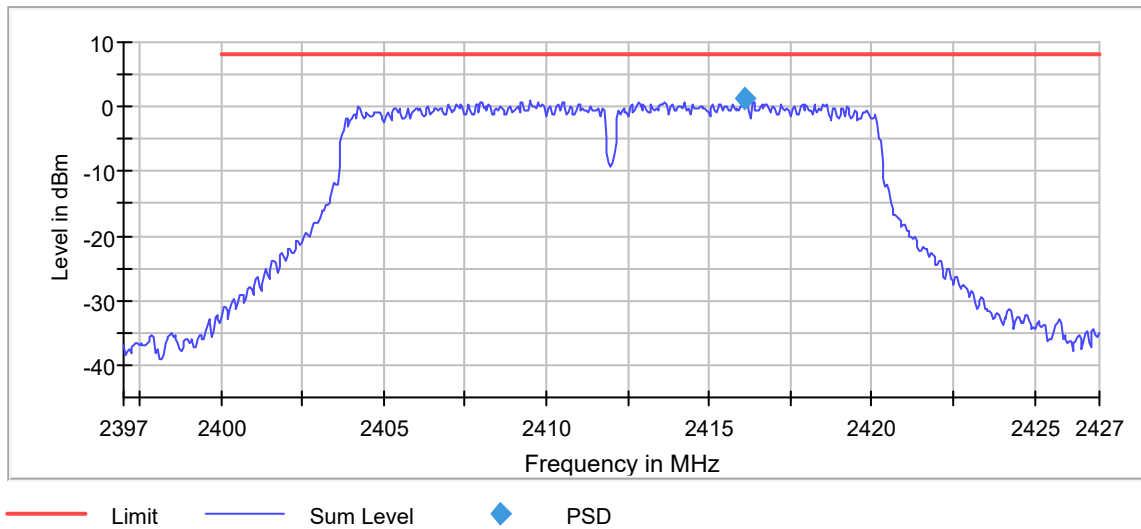

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.37 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.600000	---	---	2403.650000	2420.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

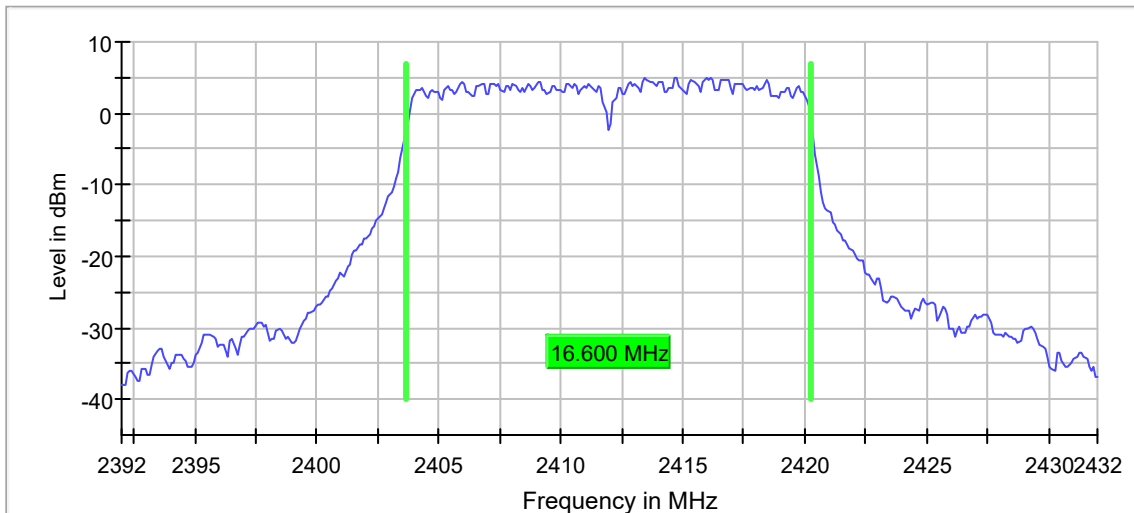

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	24 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2416.125000	2.5

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.875000	-30.6	13.1	-17.5	PASS
2399.825000	-30.7	13.1	-17.5	PASS
2399.625000	-30.8	13.2	-17.5	PASS
2399.575000	-30.9	13.4	-17.5	PASS
2399.775000	-31.3	13.8	-17.5	PASS
2399.925000	-31.4	13.9	-17.5	PASS
2399.975000	-31.5	14.0	-17.5	PASS
2399.675000	-31.8	14.3	-17.5	PASS
2397.825000	-32.2	14.7	-17.5	PASS
2397.875000	-32.3	14.8	-17.5	PASS
2399.525000	-32.4	14.9	-17.5	PASS
2397.775000	-32.7	15.2	-17.5	PASS
2398.575000	-32.8	15.3	-17.5	PASS
2398.525000	-33.0	15.5	-17.5	PASS
2398.475000	-33.0	15.5	-17.5	PASS

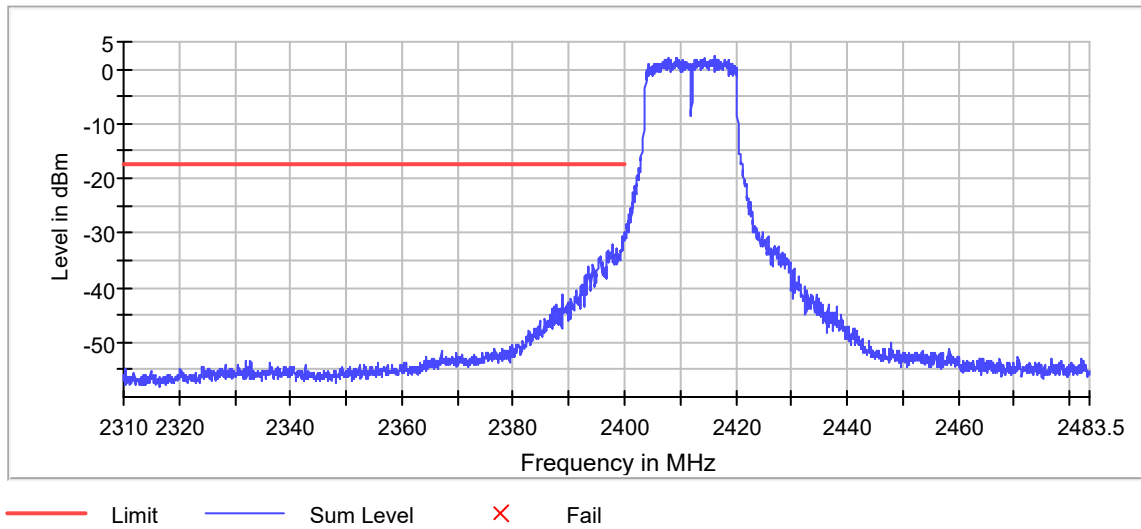

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	25 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.36 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.550000	0.500000	---	2428.725000	2445.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	3.1	PASS

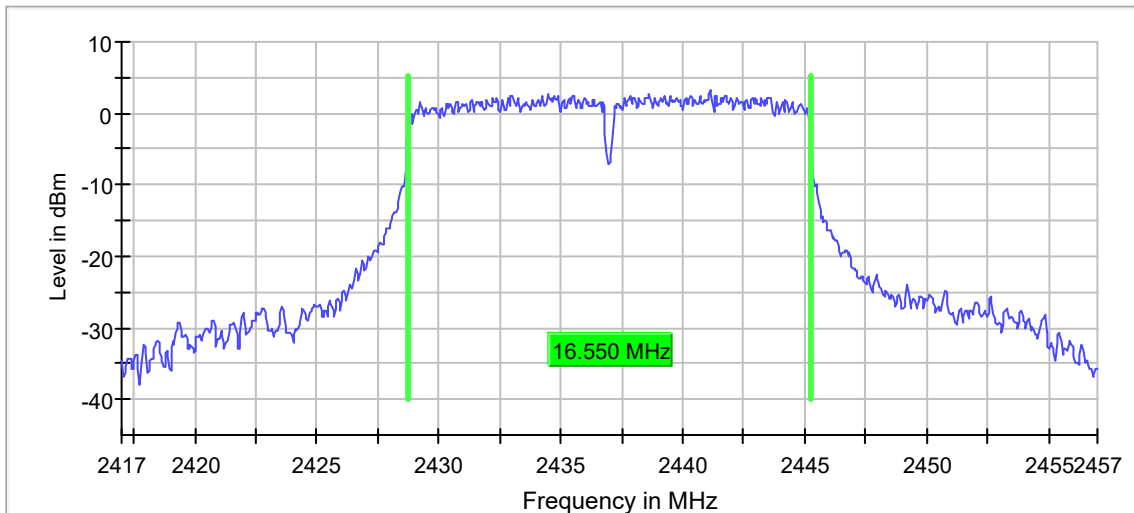

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.10 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.3	30.0	PASS

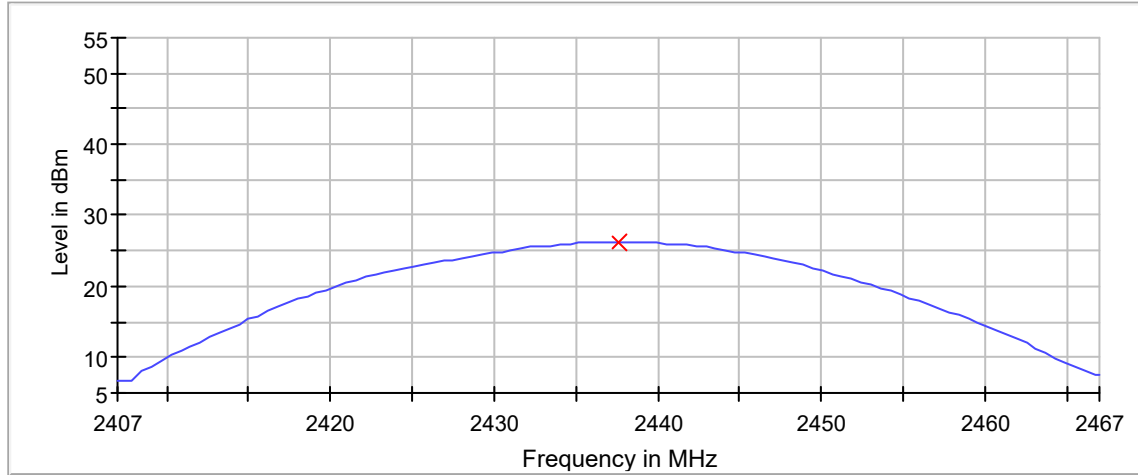

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.550 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.02 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2441.125000	3.080	8.0	PASS

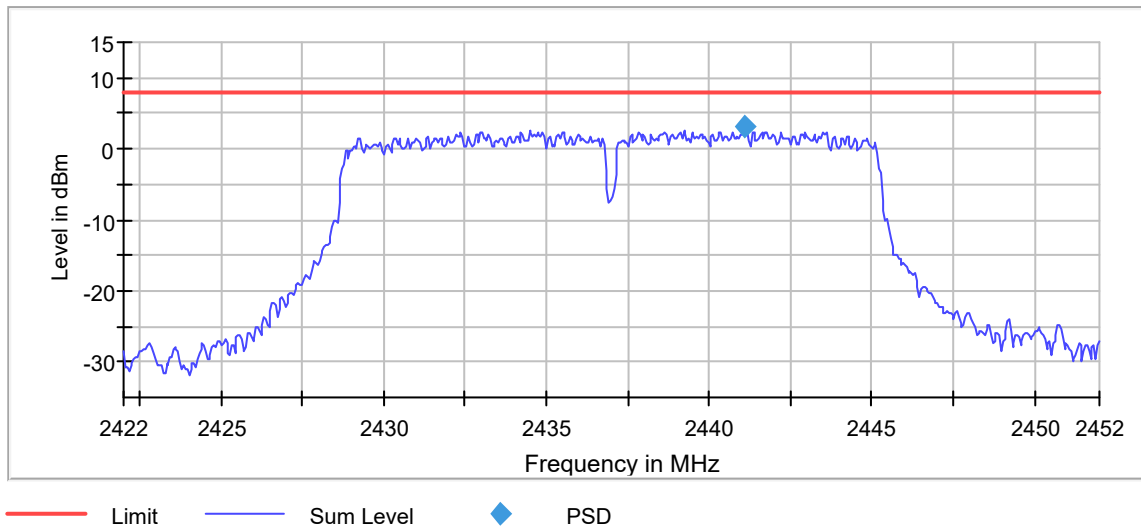

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.22 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.600000	---	---	2428.650000	2445.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

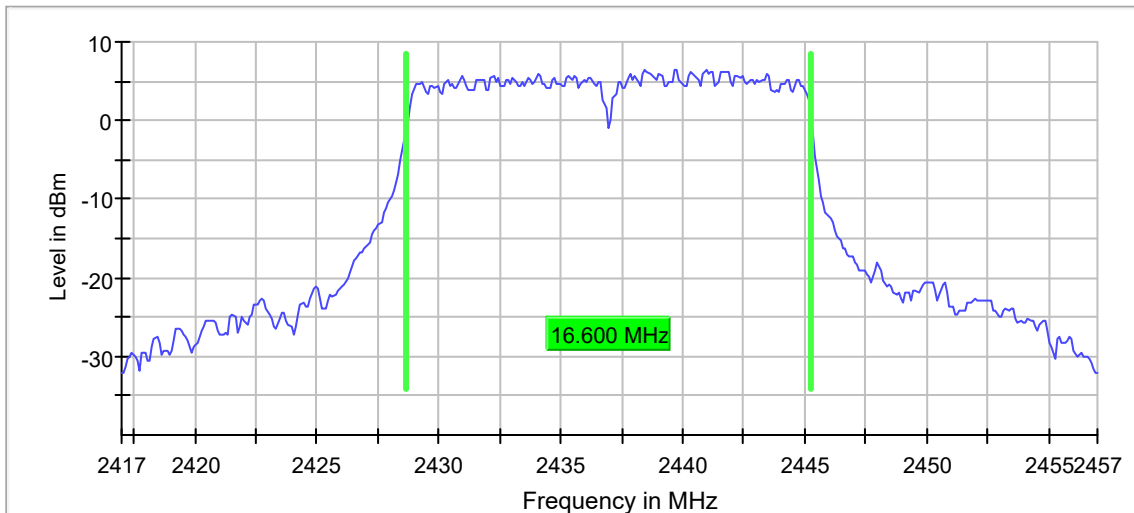

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.550000	0.500000	---	2463.675000	2480.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-11.5	PASS

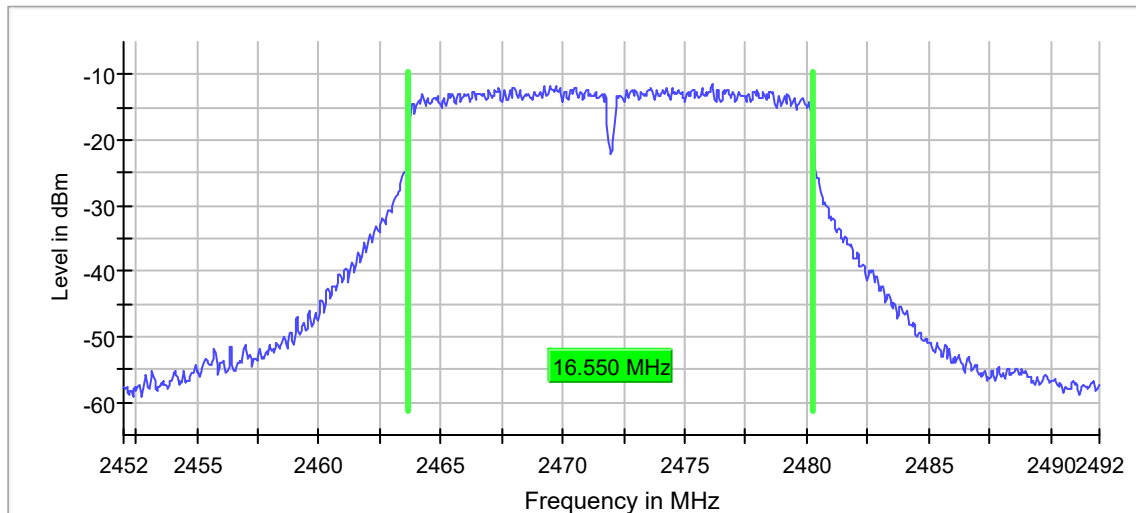

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.16 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	11.8	30.0	PASS

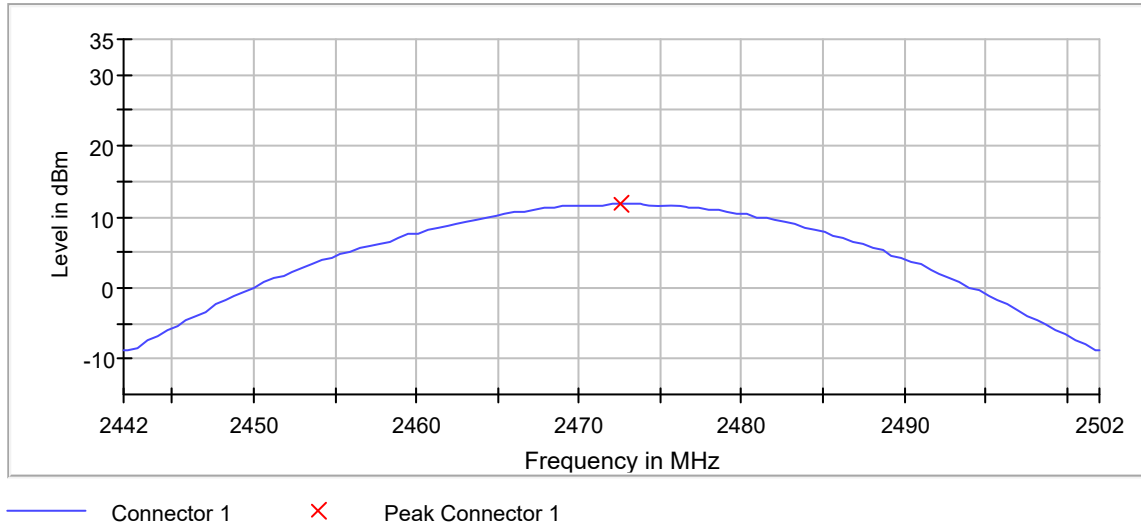

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.550 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2476.125000	-11.891	8.0	PASS

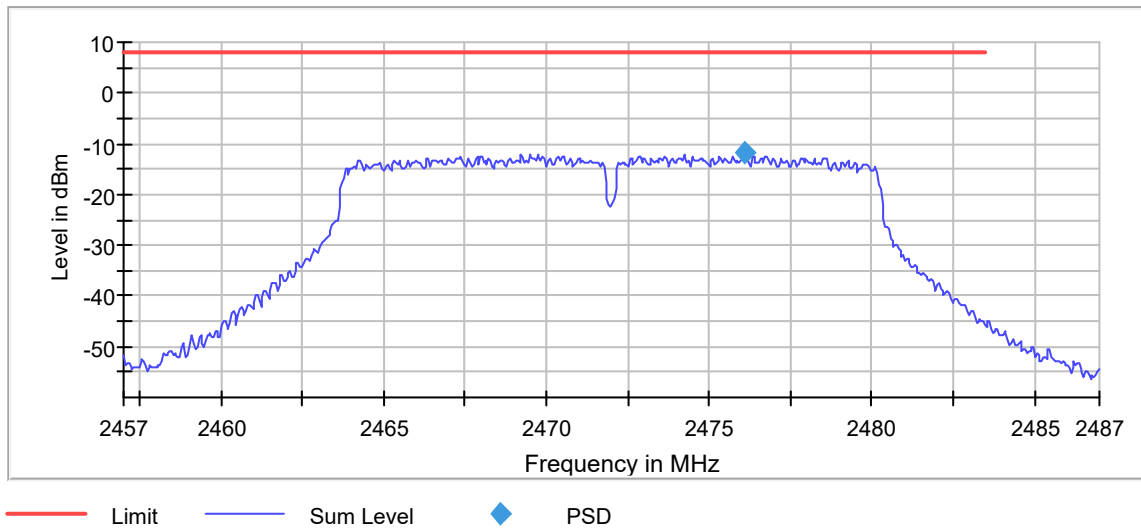

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.39 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.600000	---	---	2463.650000	2480.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

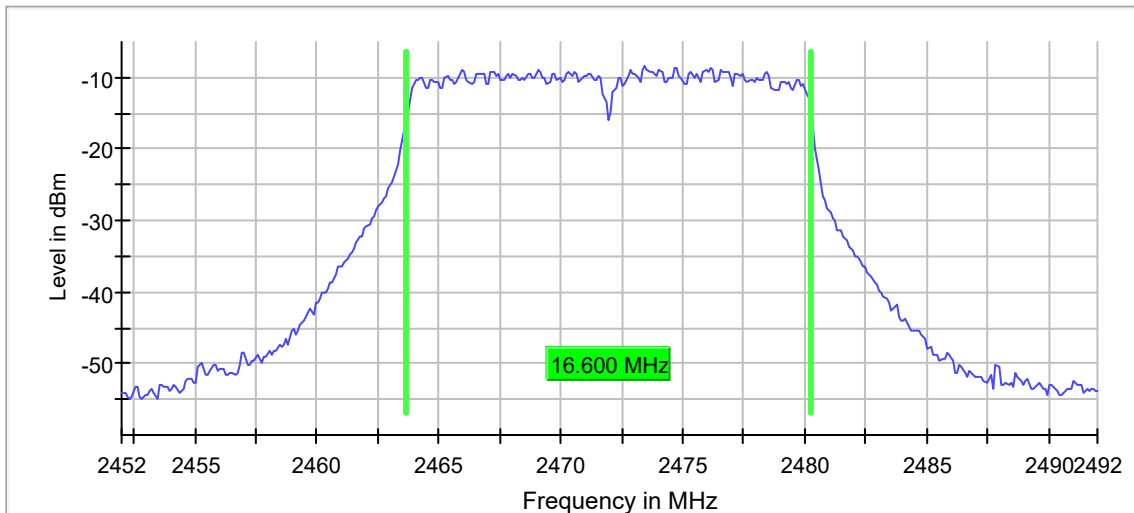

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.30 dB

802.11g, 9MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.650000	0.500000	---	2403.675000	2420.325000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	1.5	PASS

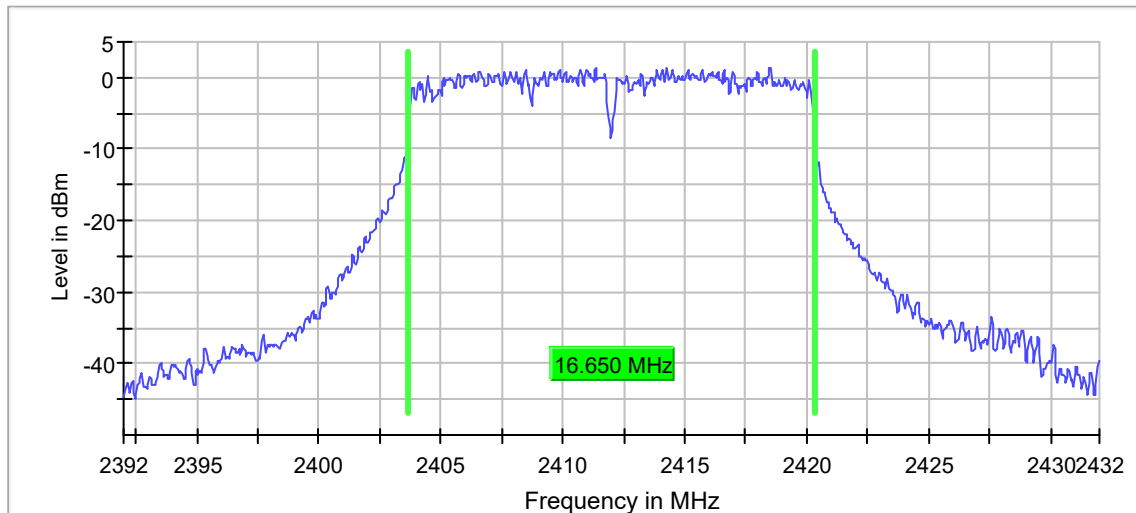

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.24 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.2	30.0	PASS

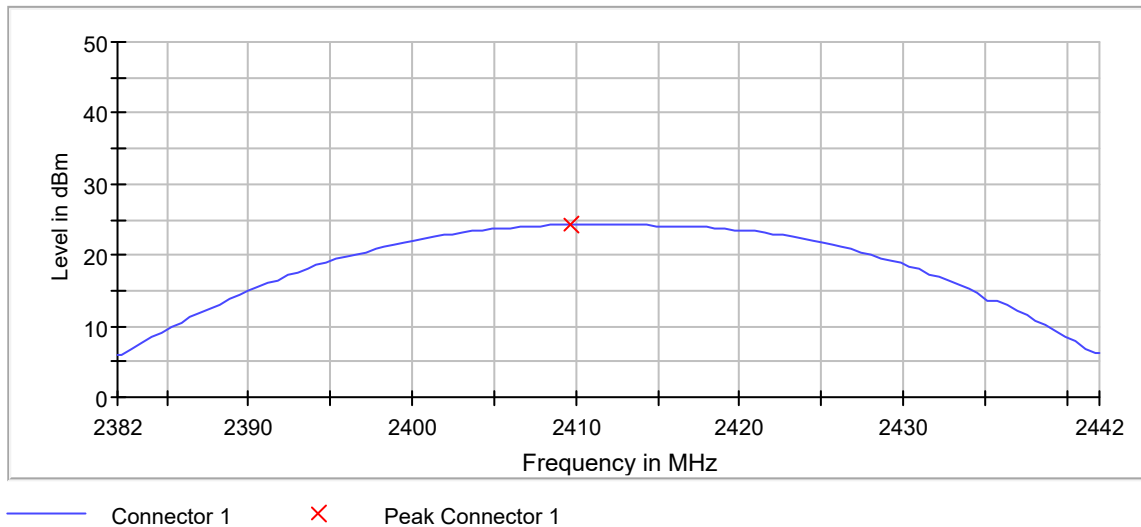

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.650 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2418.475000	1.954	8.0	PASS

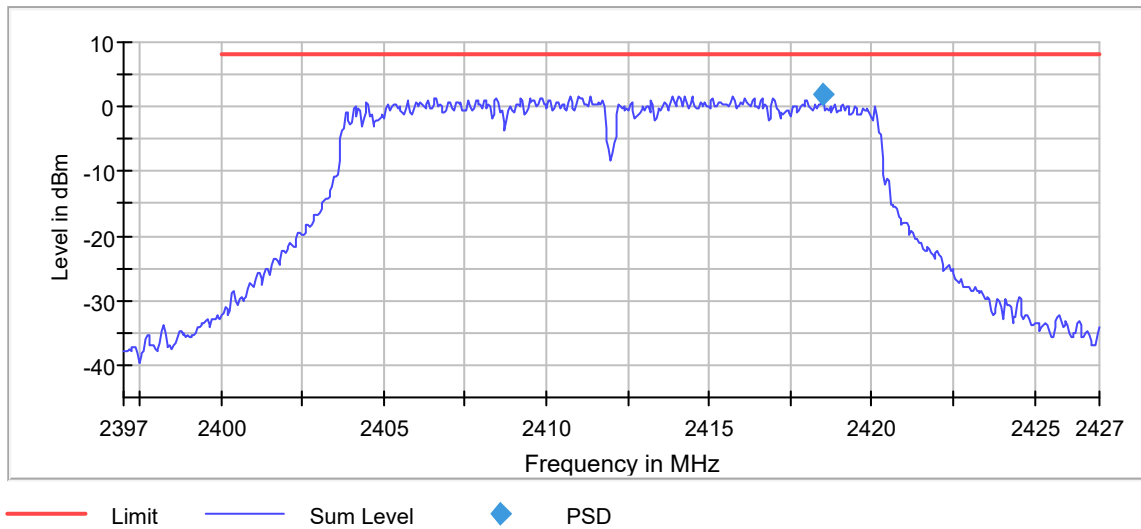

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.19 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.600000	---	---	2403.650000	2420.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

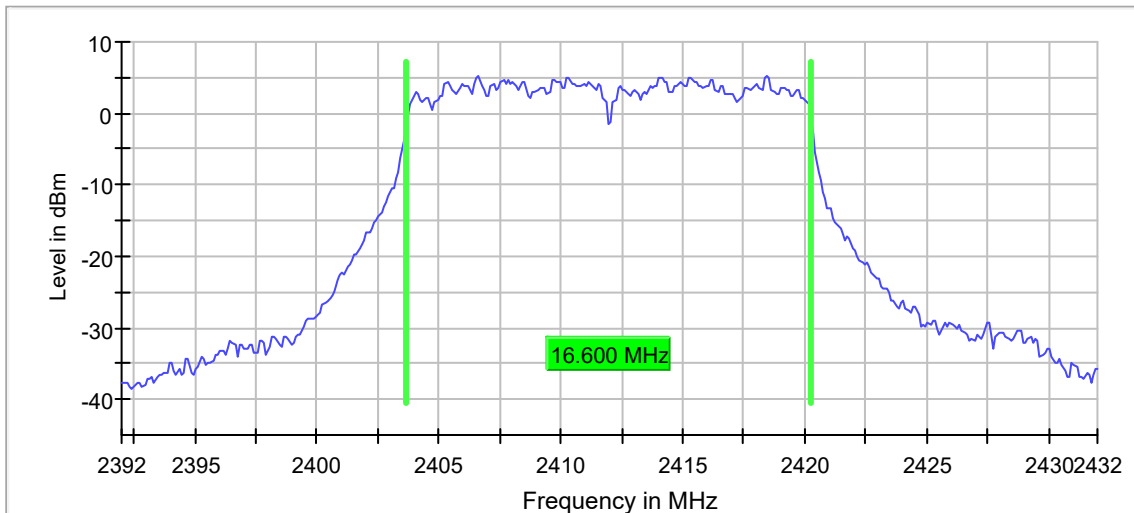

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2418.475000	2.7

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.875000	-31.2	13.9	-17.3	PASS
2399.975000	-31.3	14.0	-17.3	PASS
2399.825000	-31.4	14.1	-17.3	PASS
2399.775000	-31.5	14.2	-17.3	PASS
2399.925000	-31.5	14.2	-17.3	PASS
2399.525000	-31.7	14.4	-17.3	PASS
2399.575000	-31.8	14.5	-17.3	PASS
2399.725000	-31.9	14.6	-17.3	PASS
2399.625000	-32.3	15.0	-17.3	PASS
2399.475000	-32.3	15.0	-17.3	PASS
2399.175000	-32.5	15.2	-17.3	PASS
2399.675000	-32.8	15.5	-17.3	PASS
2399.425000	-32.9	15.6	-17.3	PASS
2399.375000	-33.0	15.7	-17.3	PASS
2399.275000	-33.1	15.8	-17.3	PASS

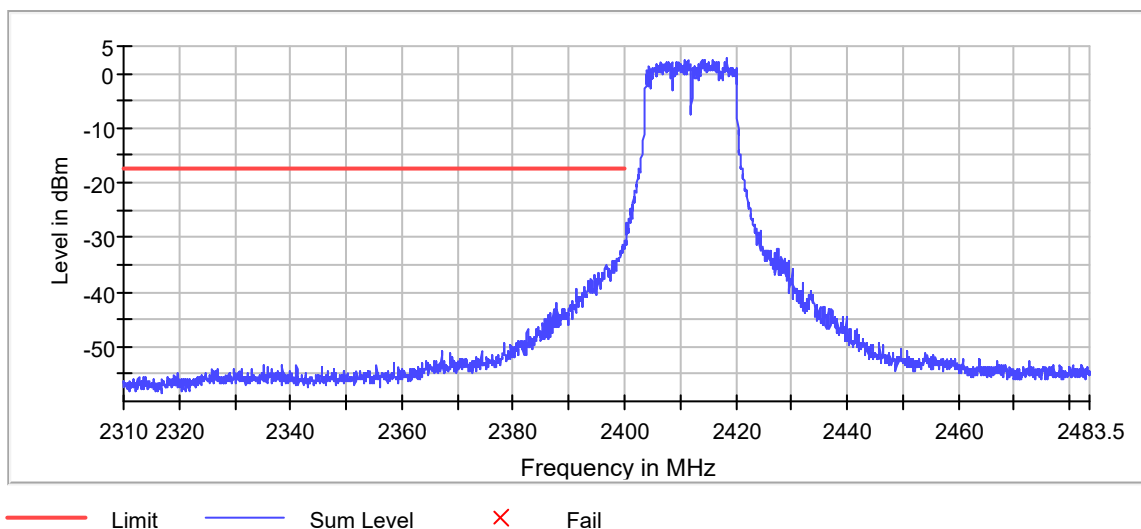

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.38 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.600000	0.500000	---	2428.675000	2445.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	3.3	PASS

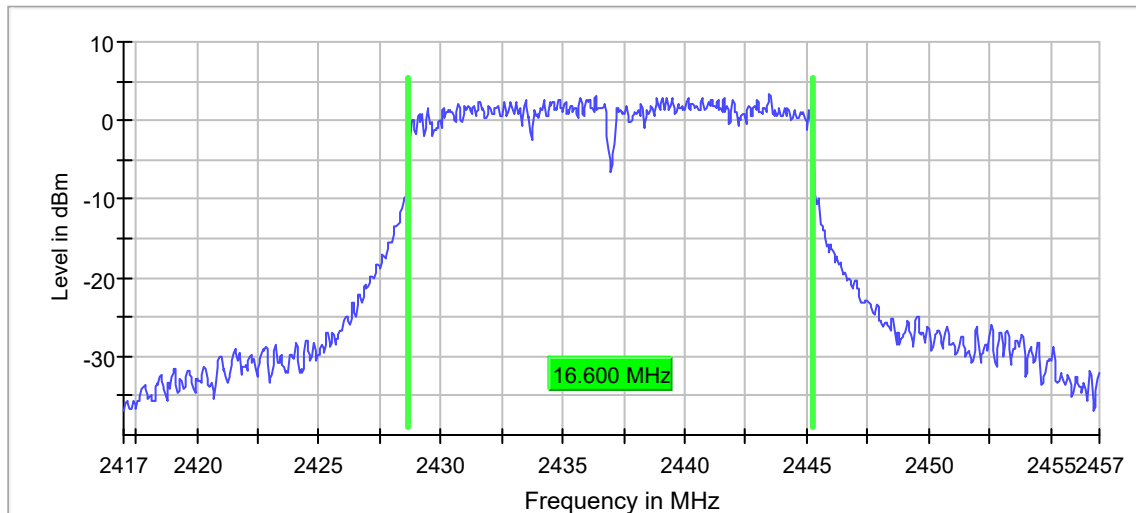

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.20 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.8	30.0	PASS

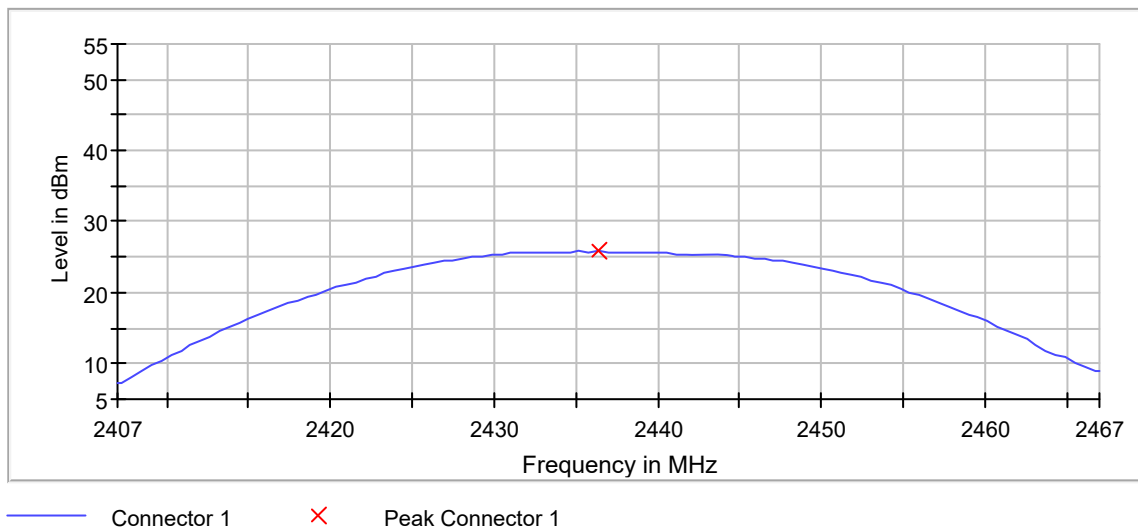

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.600 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2443.475000	3.287	8.0	PASS

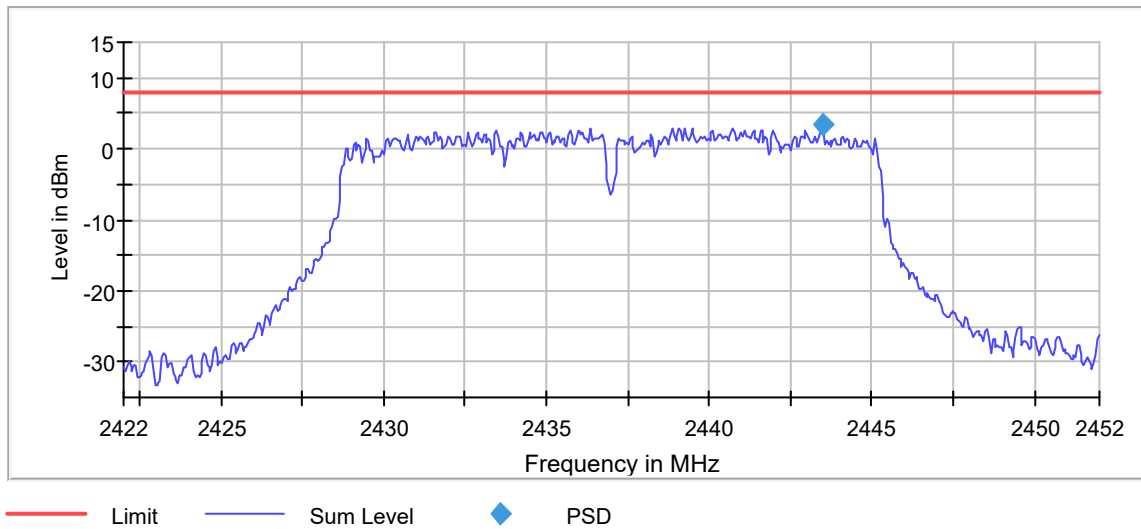

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.22 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.600000	---	---	2428.650000	2445.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

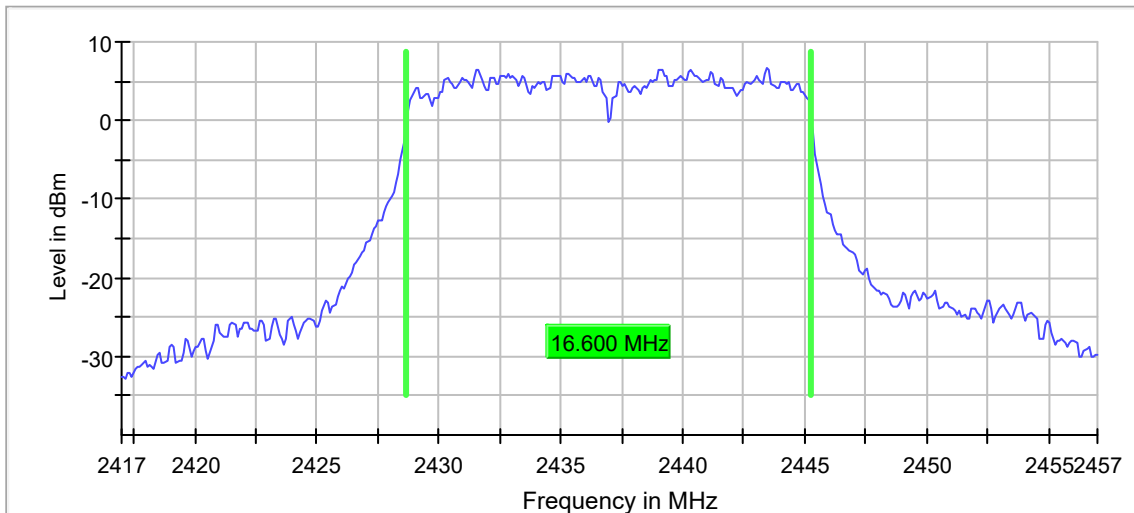

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.600000	0.500000	---	2463.675000	2480.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-11.9	PASS

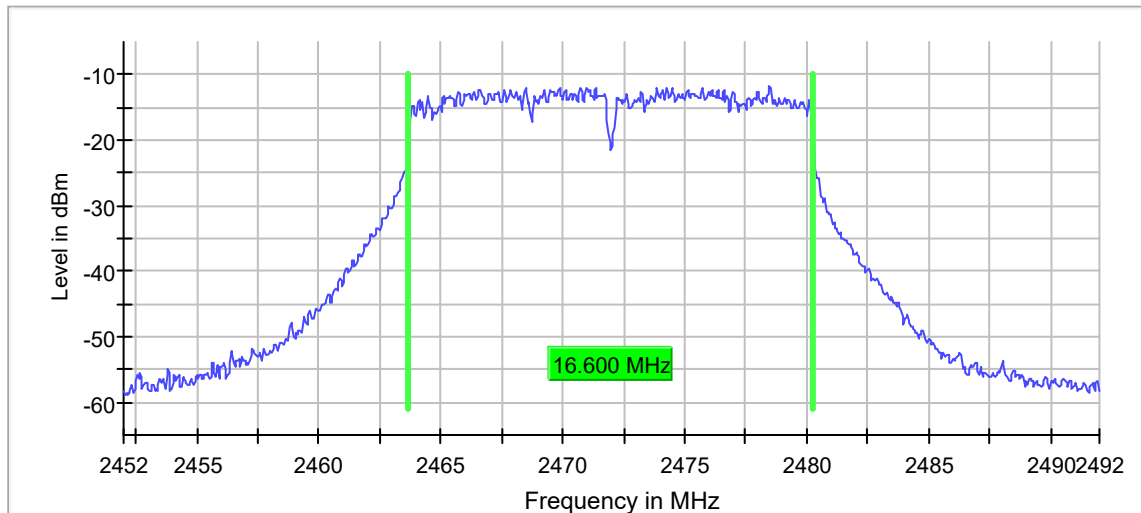

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	11.9	30.0	PASS

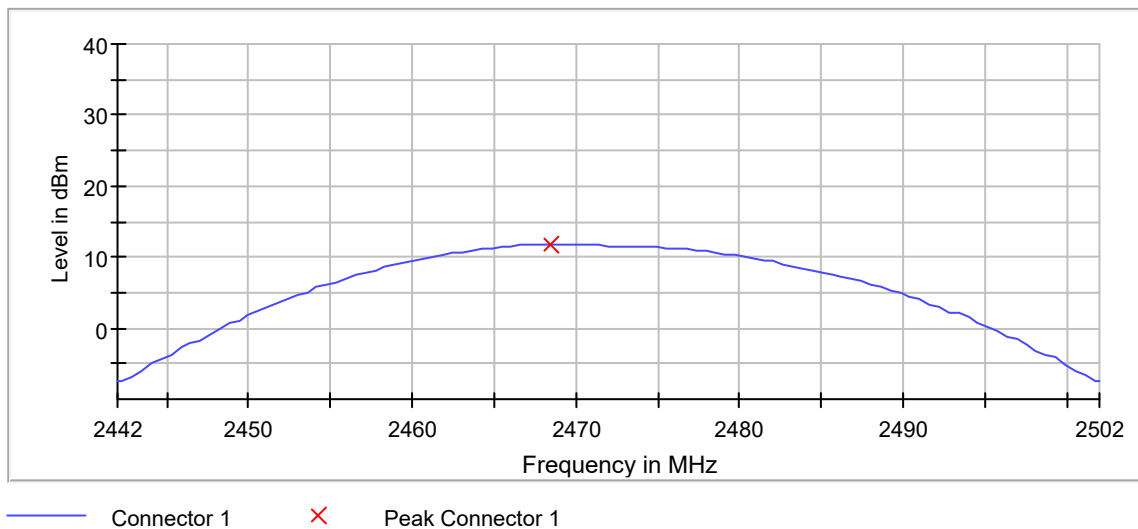

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.600 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2478.475000	-11.721	8.0	PASS

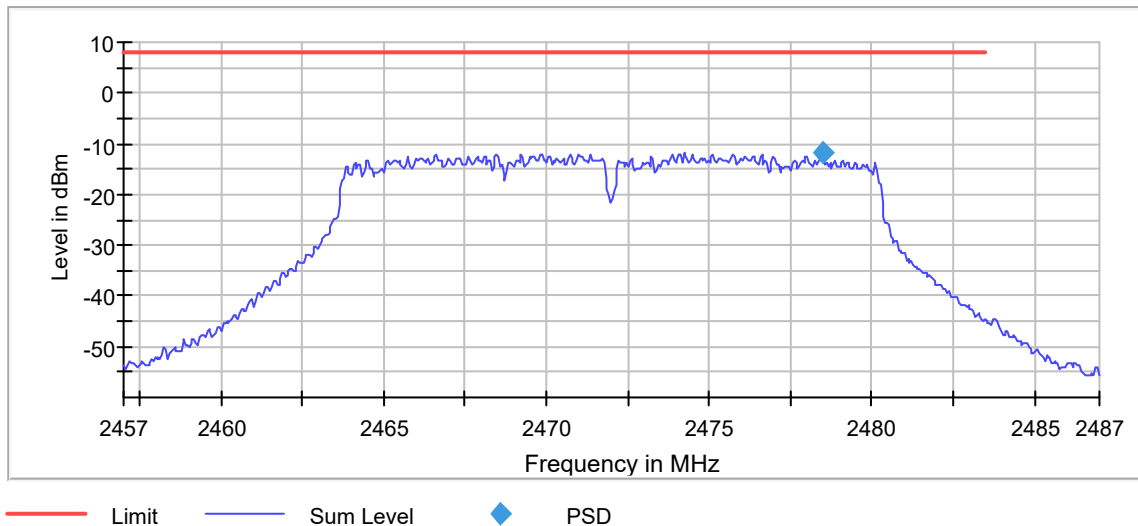

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.41 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.600000	---	---	2463.650000	2480.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

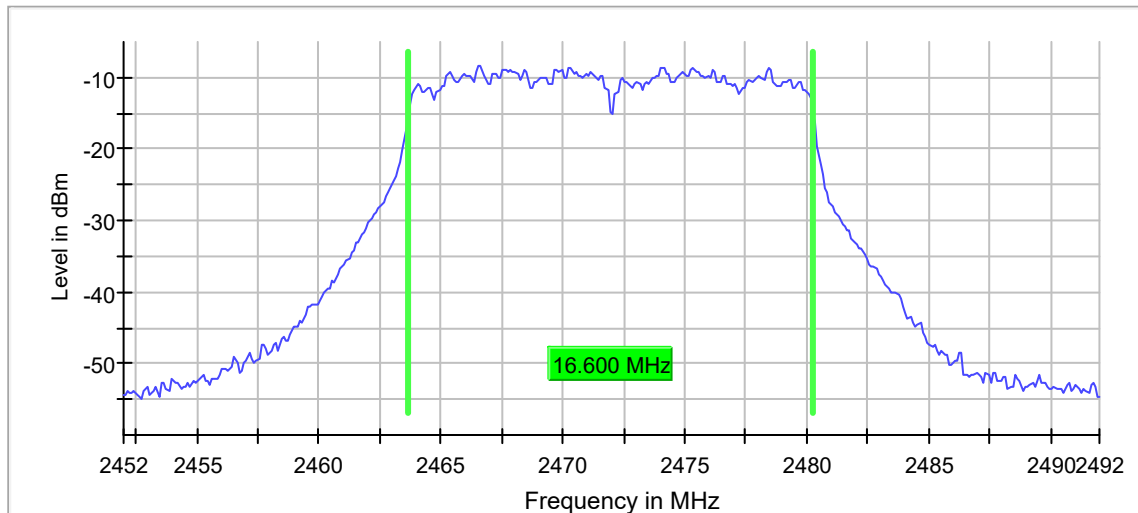

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	17 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Band Edge high (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2472.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2478.475000	-11.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-42.8	11.7	-31.1	PASS
2483.625000	-42.9	11.9	-31.1	PASS
2483.575000	-43.0	12.0	-31.1	PASS
2483.875000	-43.5	12.4	-31.1	PASS
2483.775000	-43.5	12.4	-31.1	PASS
2483.825000	-43.5	12.5	-31.1	PASS
2483.725000	-43.7	12.6	-31.1	PASS
2483.675000	-44.0	13.0	-31.1	PASS
2483.925000	-44.2	13.1	-31.1	PASS
2484.125000	-45.5	14.4	-31.1	PASS
2484.075000	-45.6	14.6	-31.1	PASS
2484.175000	-45.7	14.6	-31.1	PASS
2484.375000	-46.1	15.1	-31.1	PASS
2483.975000	-46.2	15.2	-31.1	PASS
2484.025000	-46.3	15.3	-31.1	PASS

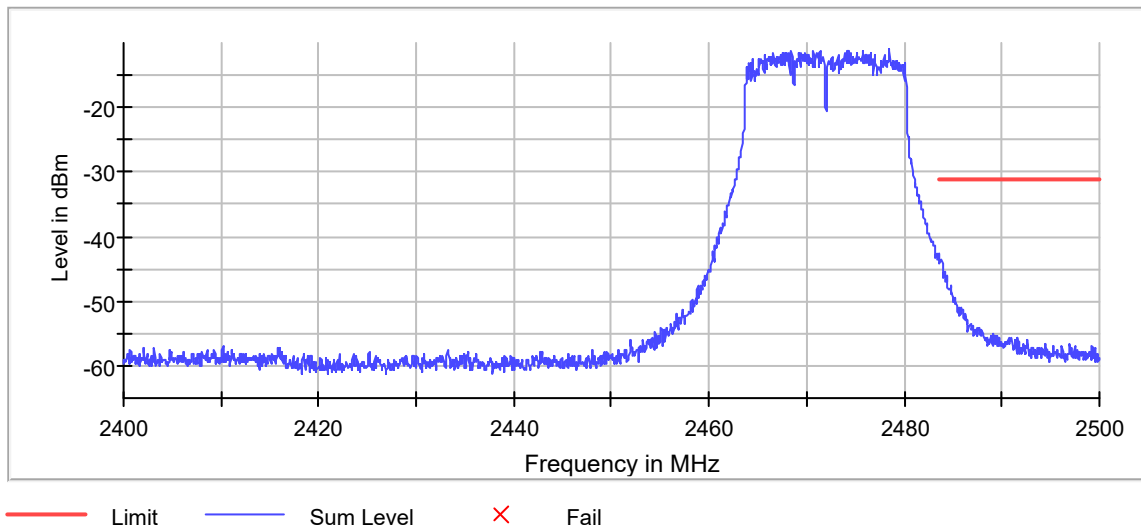

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.48350 GHz	2.48350 GHz
Stop Frequency	2.50000 GHz	2.50000 GHz
Span	16.500 MHz	16.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
SweepTime	1.010 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.01 dB	0.50 dB

802.11g, 12MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.600000	0.500000	---	2403.675000	2420.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	1.2	PASS

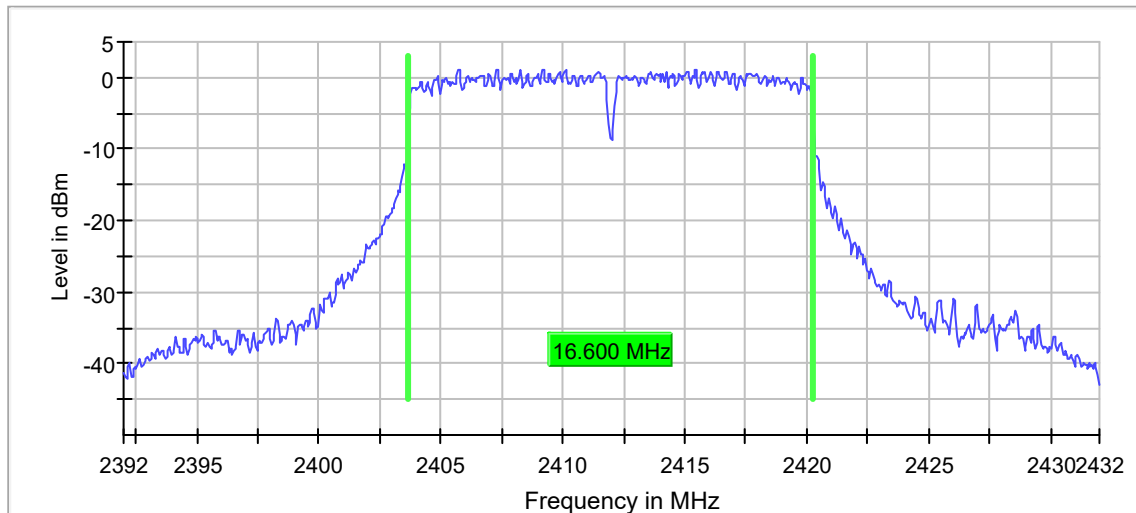

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.26 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	25.2	30.0	PASS

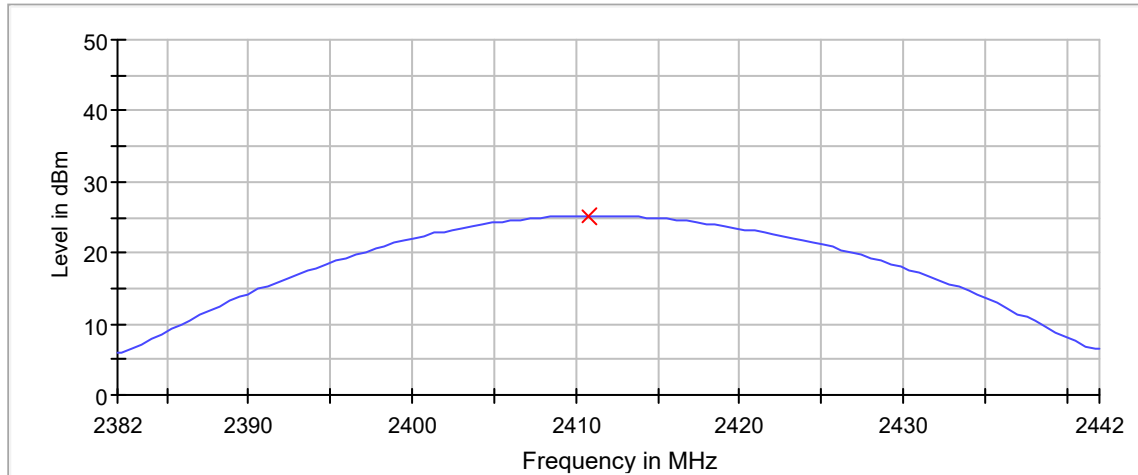

— Connector 1 × Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.600 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2407.275000	1.520	8.0	PASS

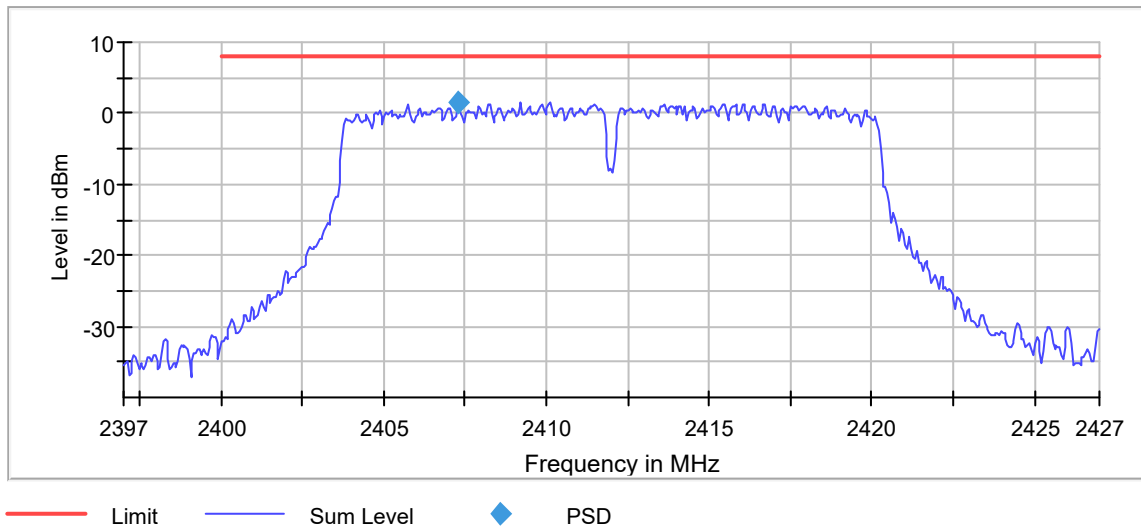

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.16 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.600000	---	---	2403.750000	2420.350000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

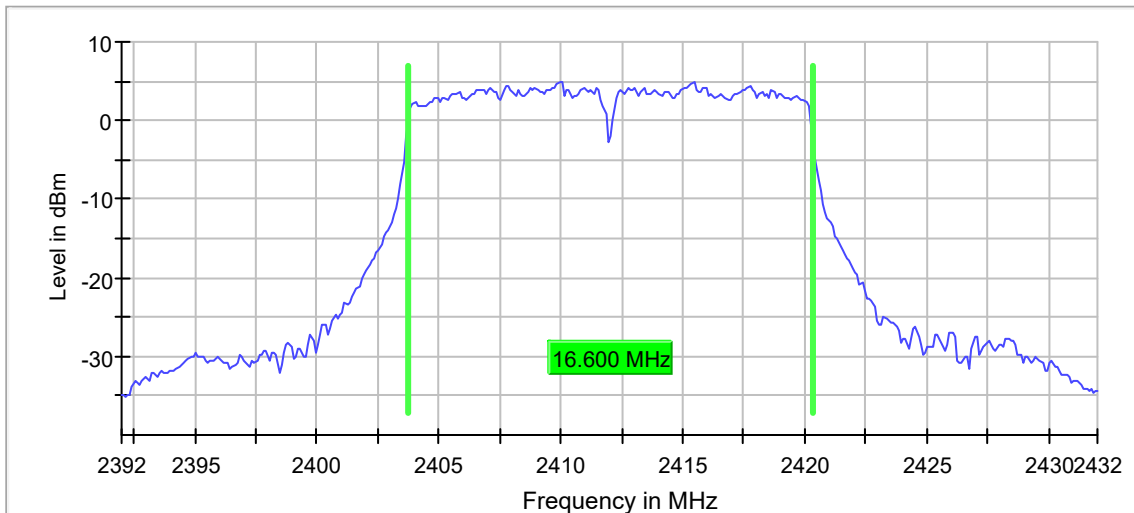

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	17 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2407.275000	2.3

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-30.0	12.3	-17.7	PASS
2399.725000	-30.0	12.3	-17.7	PASS
2398.275000	-30.5	12.8	-17.7	PASS
2399.825000	-30.6	12.8	-17.7	PASS
2398.225000	-30.8	13.1	-17.7	PASS
2399.675000	-31.0	13.3	-17.7	PASS
2398.325000	-31.3	13.6	-17.7	PASS
2399.275000	-31.4	13.6	-17.7	PASS
2399.225000	-31.4	13.7	-17.7	PASS
2398.875000	-31.5	13.8	-17.7	PASS
2398.825000	-31.6	13.9	-17.7	PASS
2398.775000	-31.7	13.9	-17.7	PASS
2399.325000	-31.7	14.0	-17.7	PASS
2399.625000	-31.7	14.0	-17.7	PASS
2398.925000	-31.9	14.2	-17.7	PASS

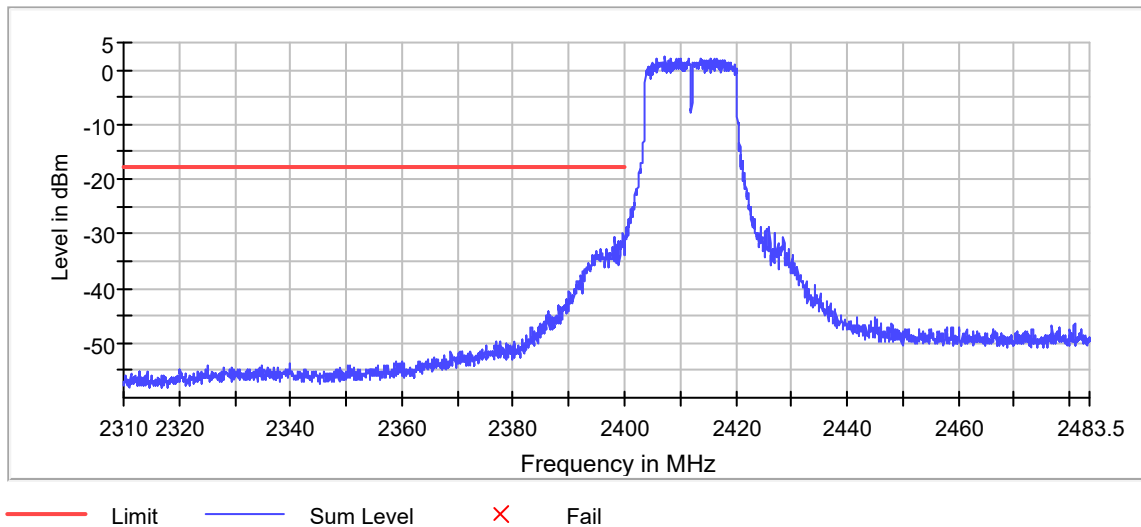

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.32 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.23 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.600000	0.500000	---	2428.675000	2445.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	2.8	PASS

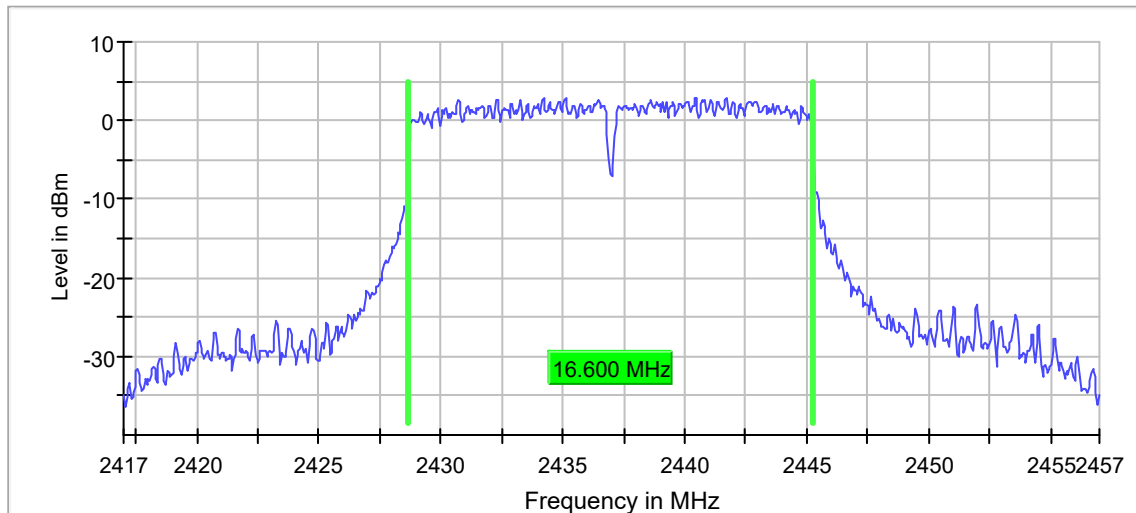

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.23 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.1	30.0	PASS

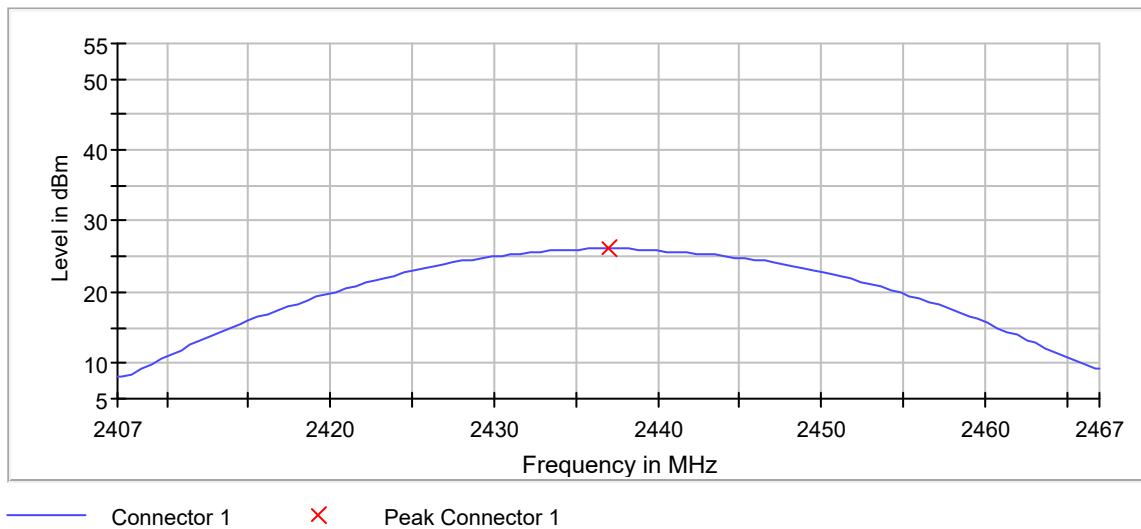

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.600 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2440.475000	2.782	8.0	PASS

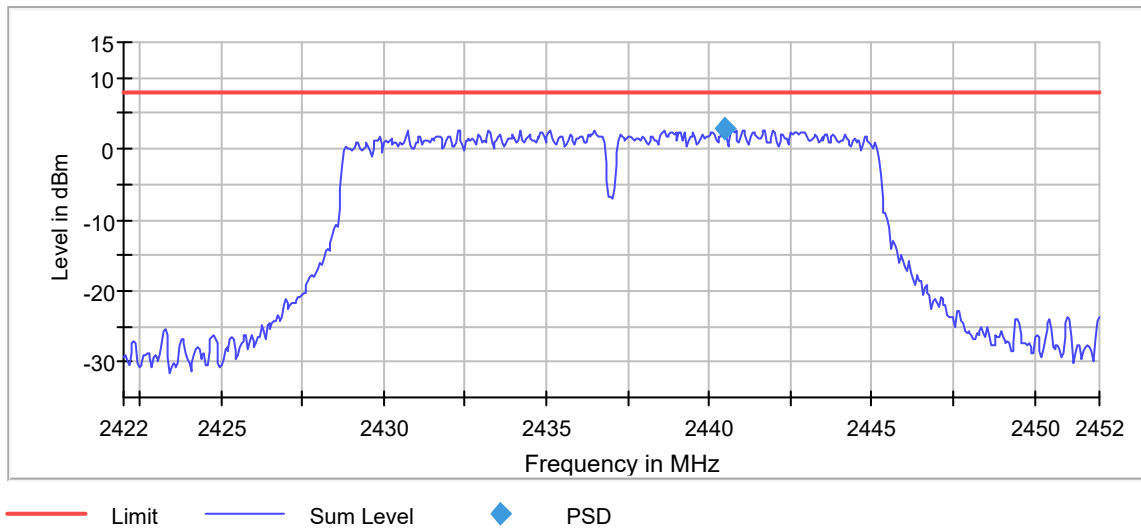

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.10 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.700000	---	---	2428.650000	2445.350000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

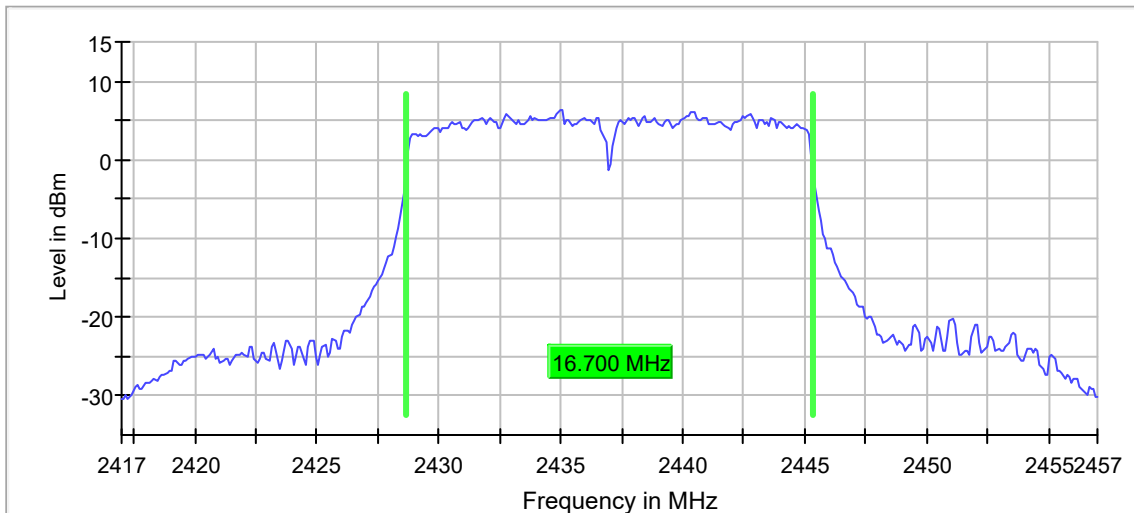

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	15 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.600000	0.500000	---	2463.675000	2480.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-11.5	PASS

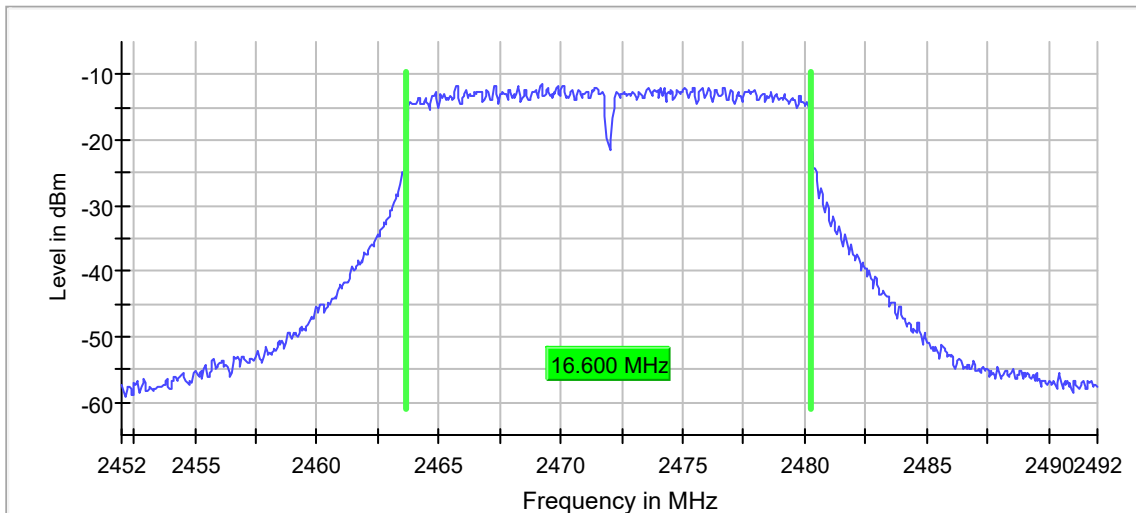

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.18 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	11.8	30.0	PASS

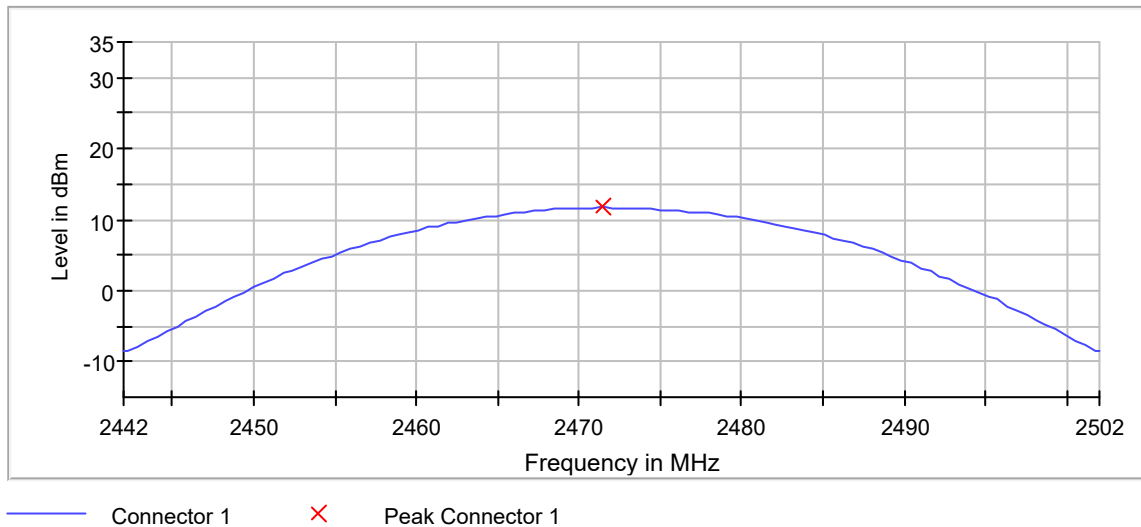

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.600 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2469.225000	-12.087	8.0	PASS

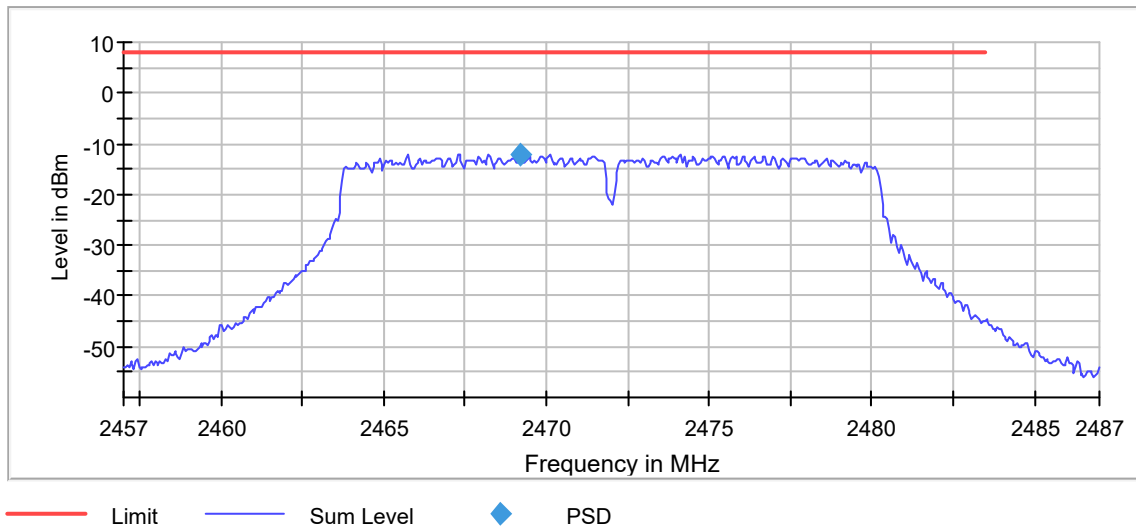

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.13 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.500000	---	---	2463.750000	2480.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

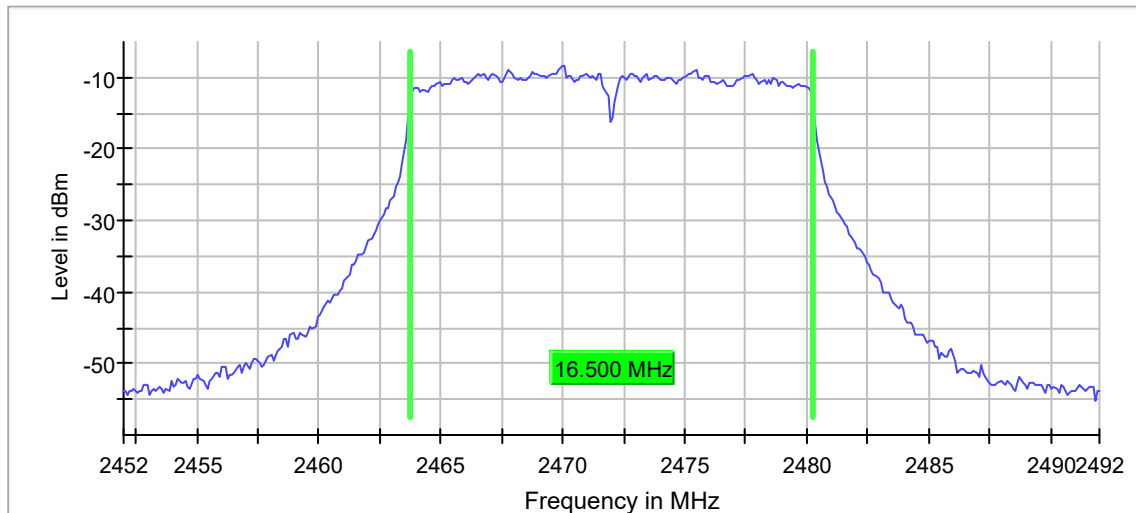

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	17 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.23 dB	0.30 dB

802.11g, 18MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.550000	0.500000	---	2403.725000	2420.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.3	PASS

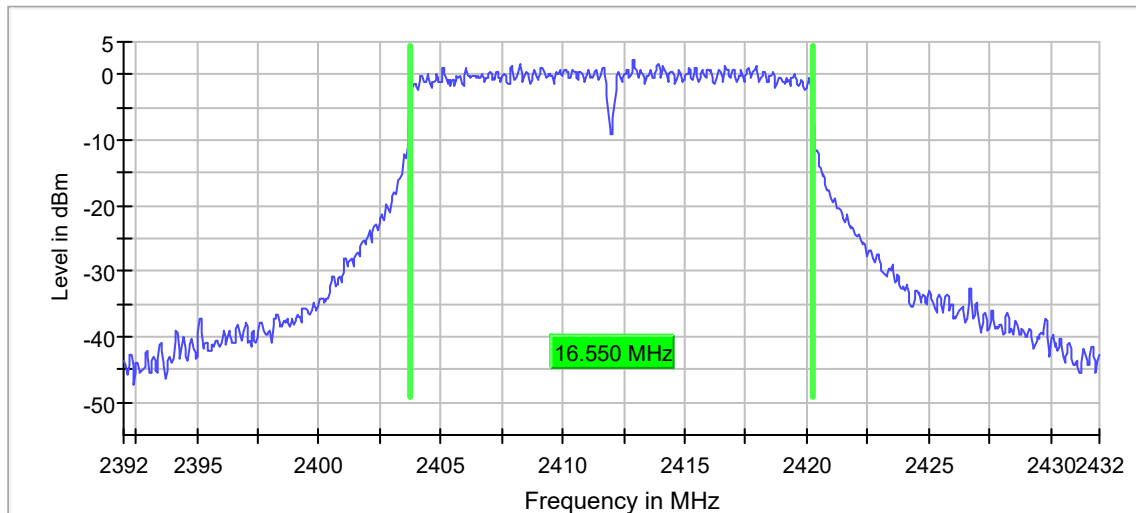

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.04 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.2	30.0	PASS

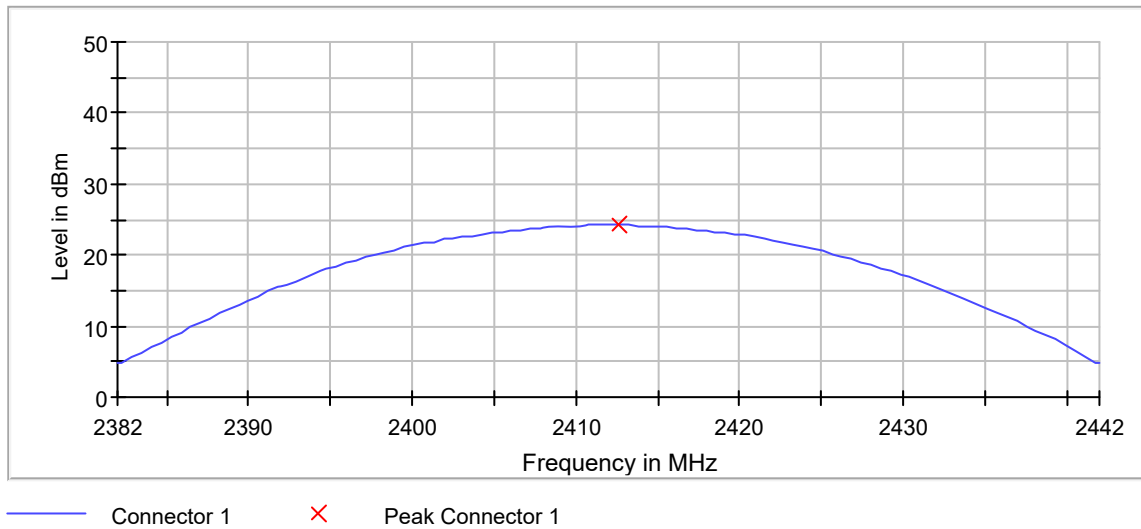

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.550 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2412.925000	2.627	8.0	PASS

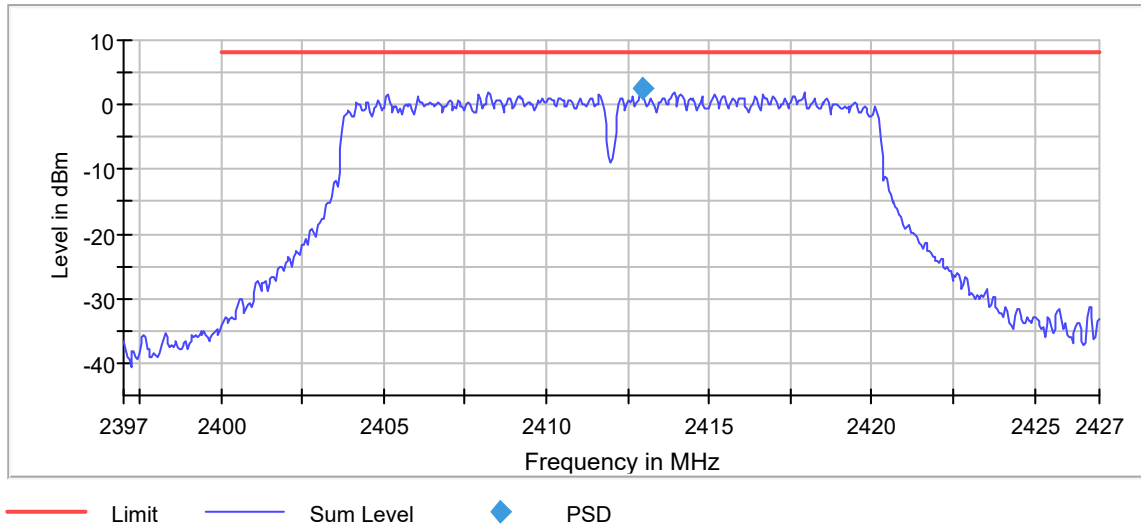

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.18 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.500000	---	---	2403.750000	2420.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

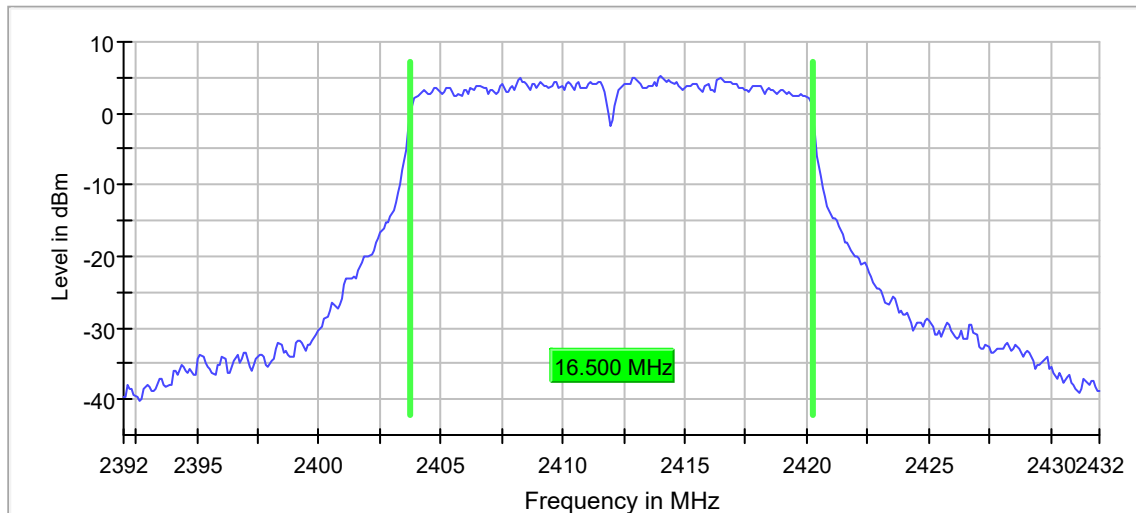

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2412.875000	3.5

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.825000	-33.2	16.7	-16.5	PASS
2399.875000	-33.3	16.8	-16.5	PASS
2399.375000	-33.5	17.0	-16.5	PASS
2399.975000	-33.6	17.1	-16.5	PASS
2399.325000	-33.6	17.2	-16.5	PASS
2399.775000	-33.8	17.3	-16.5	PASS
2399.225000	-33.9	17.4	-16.5	PASS
2399.725000	-33.9	17.4	-16.5	PASS
2399.925000	-33.9	17.4	-16.5	PASS
2399.175000	-34.1	17.6	-16.5	PASS
2399.425000	-34.3	17.8	-16.5	PASS
2399.575000	-34.3	17.8	-16.5	PASS
2395.125000	-34.4	17.9	-16.5	PASS
2399.525000	-34.4	17.9	-16.5	PASS
2399.475000	-34.4	17.9	-16.5	PASS

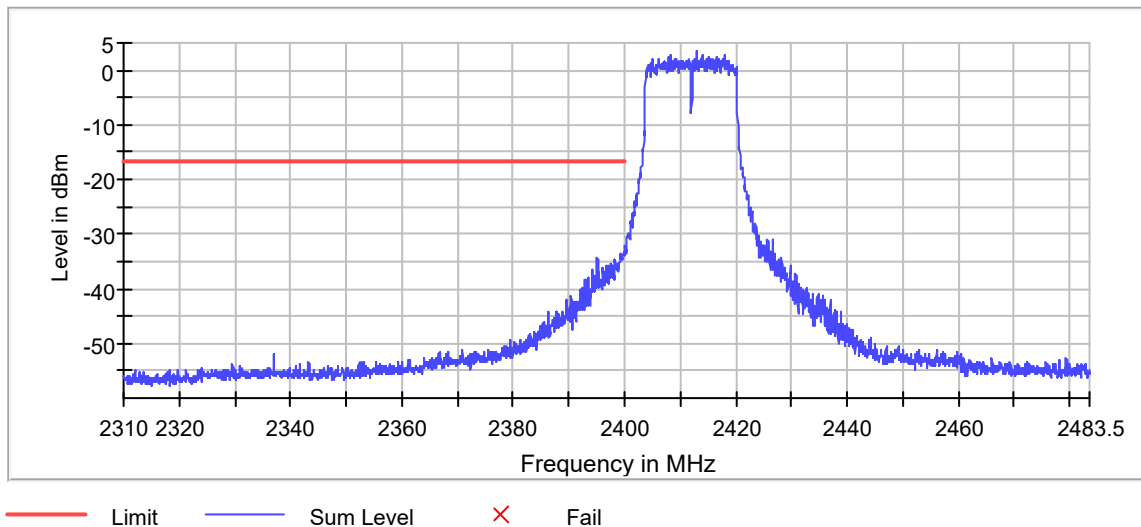

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	36 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.45 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.550000	0.500000	---	2428.725000	2445.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	4.0	PASS

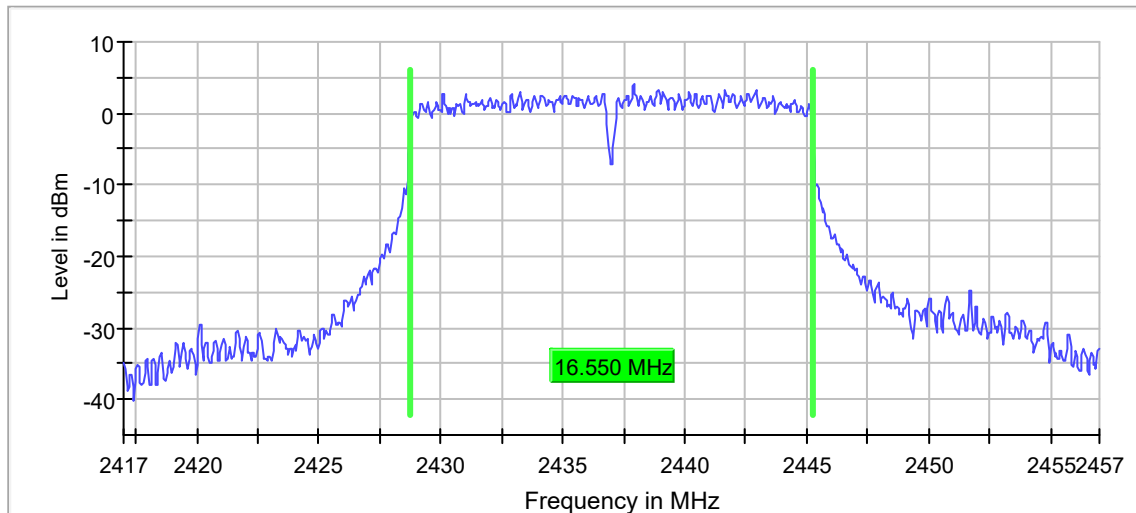

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.13 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.7	30.0	PASS

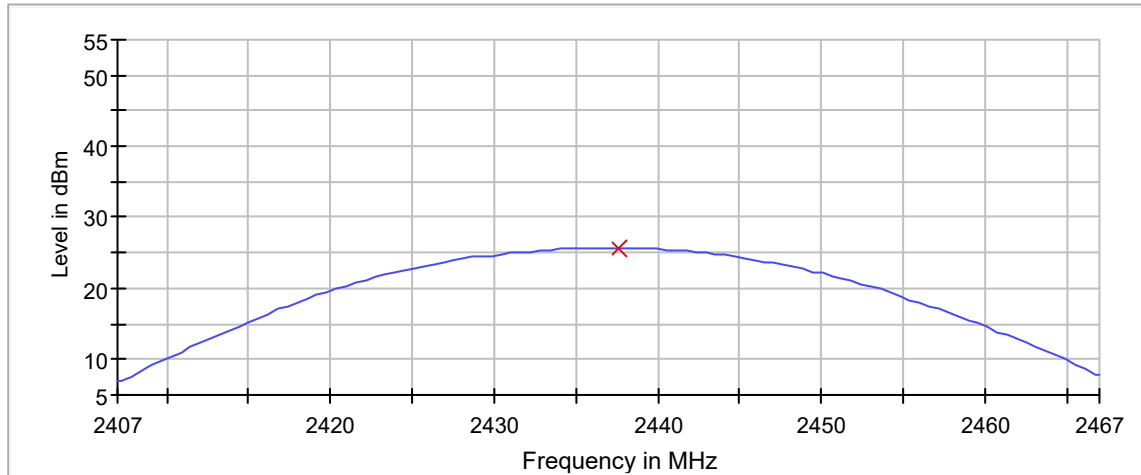

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.550 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2437.925000	3.926	8.0	PASS

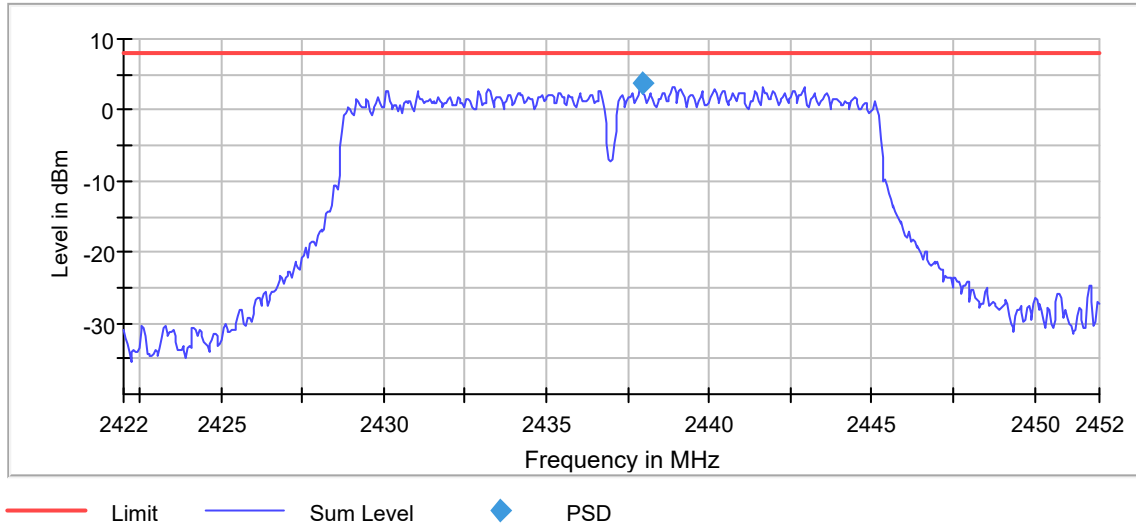

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.25 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.500000	---	---	2428.750000	2445.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

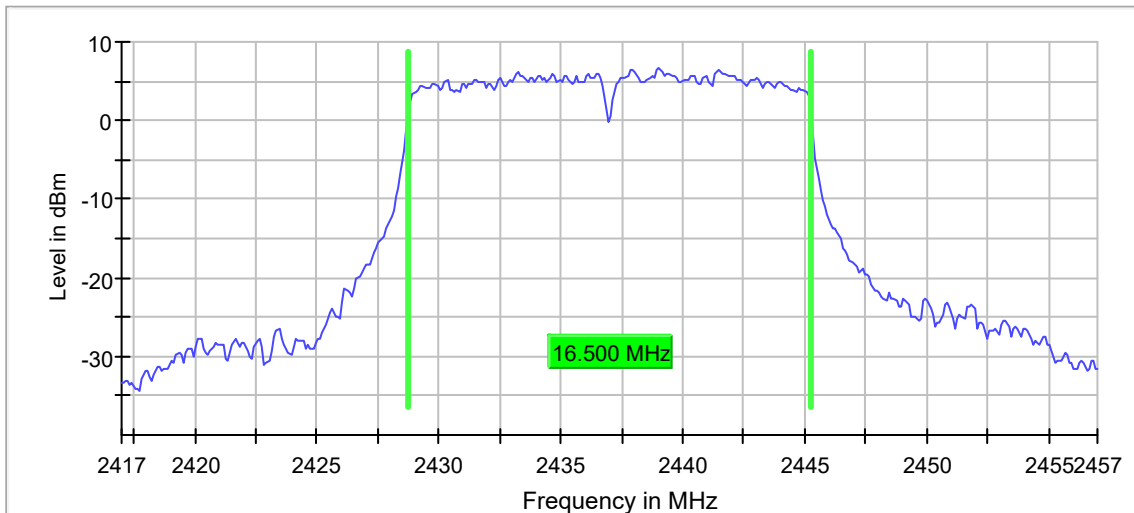

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.550000	0.500000	---	2463.725000	2480.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-10.6	PASS

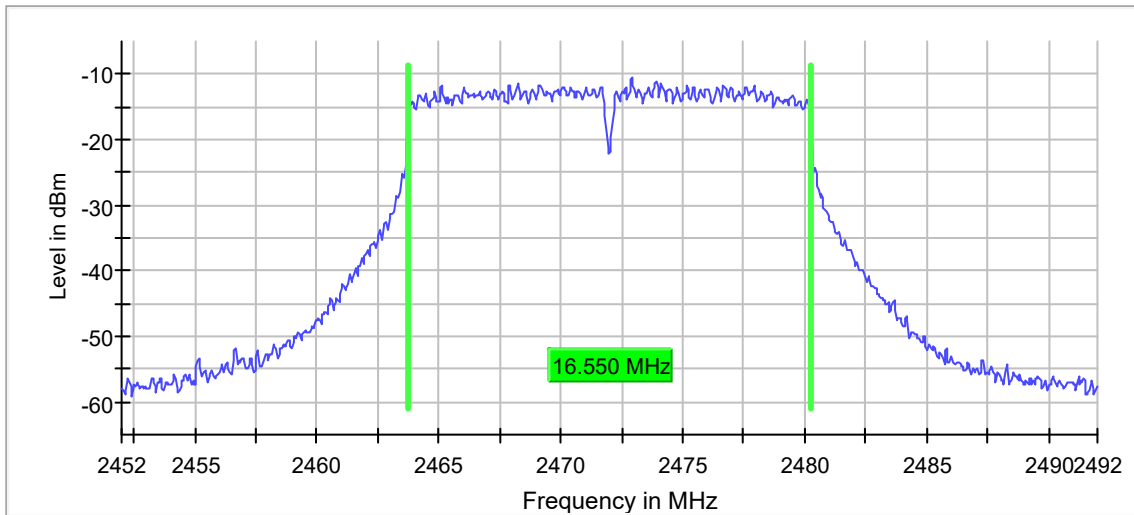

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	11.5	30.0	PASS

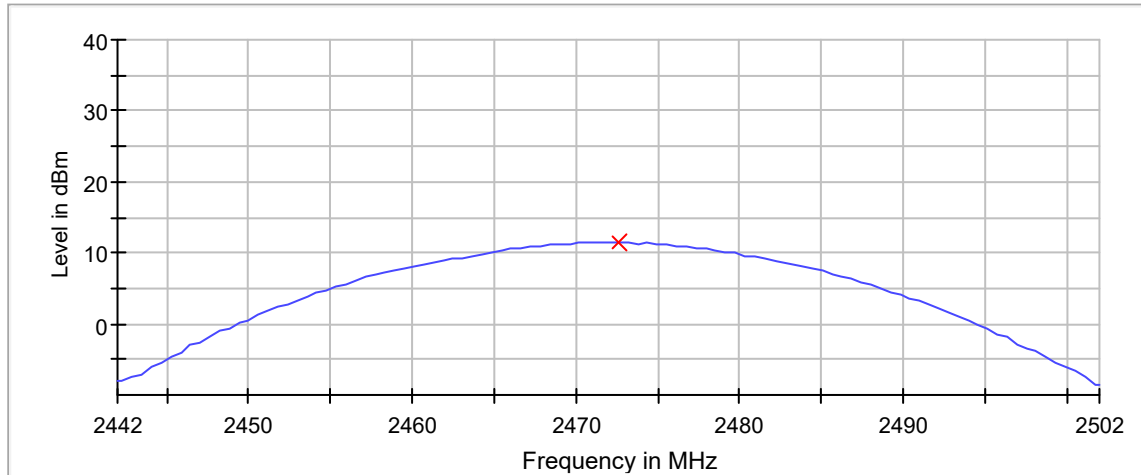

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.550 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2472.925000	-11.070	8.0	PASS

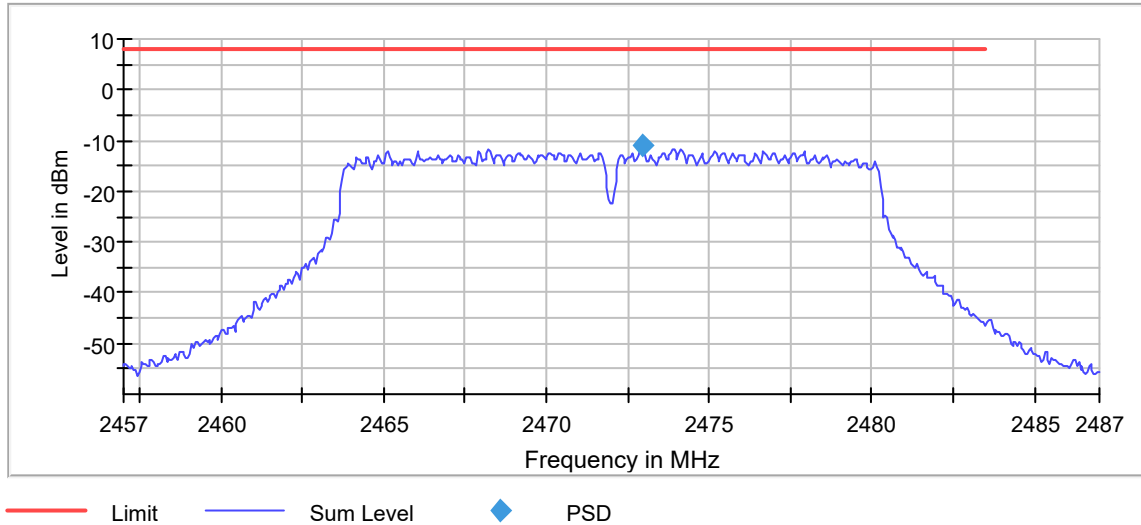

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.17 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.500000	---	---	2463.750000	2480.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

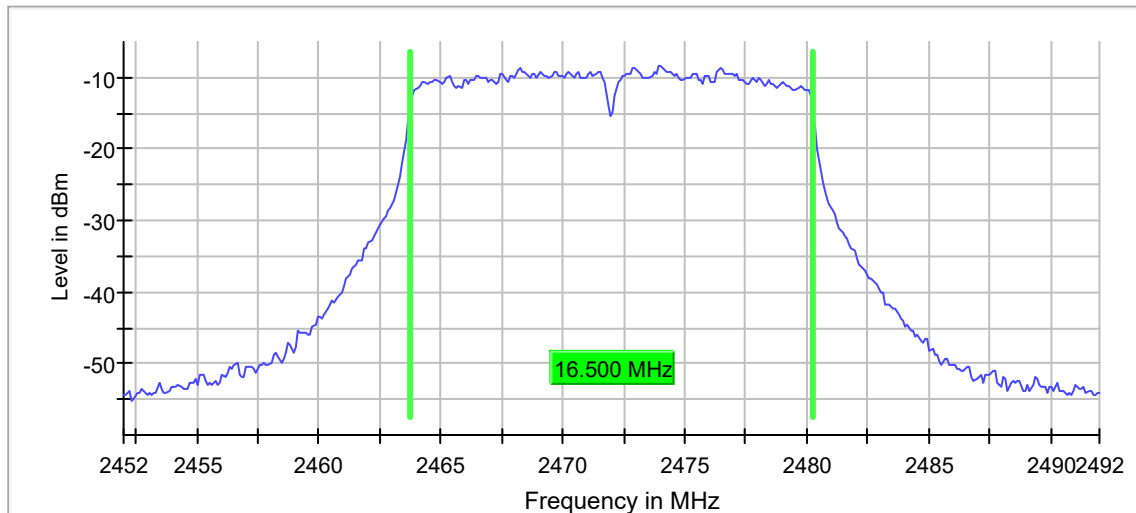

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	19 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.30 dB

802.11g, 24MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.550000	0.500000	---	2403.725000	2420.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.9	PASS

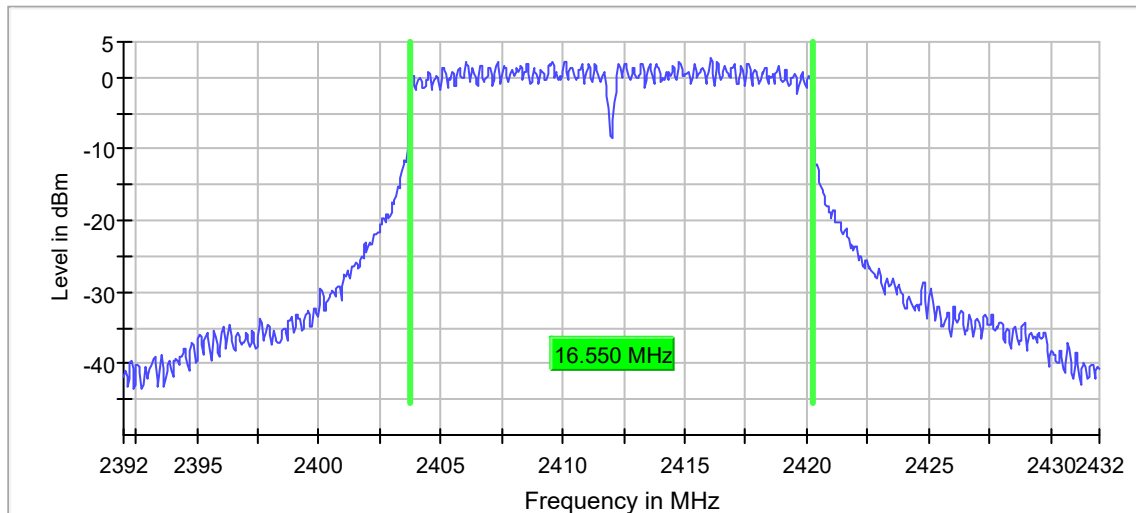

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.22 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	25.2	30.0	PASS

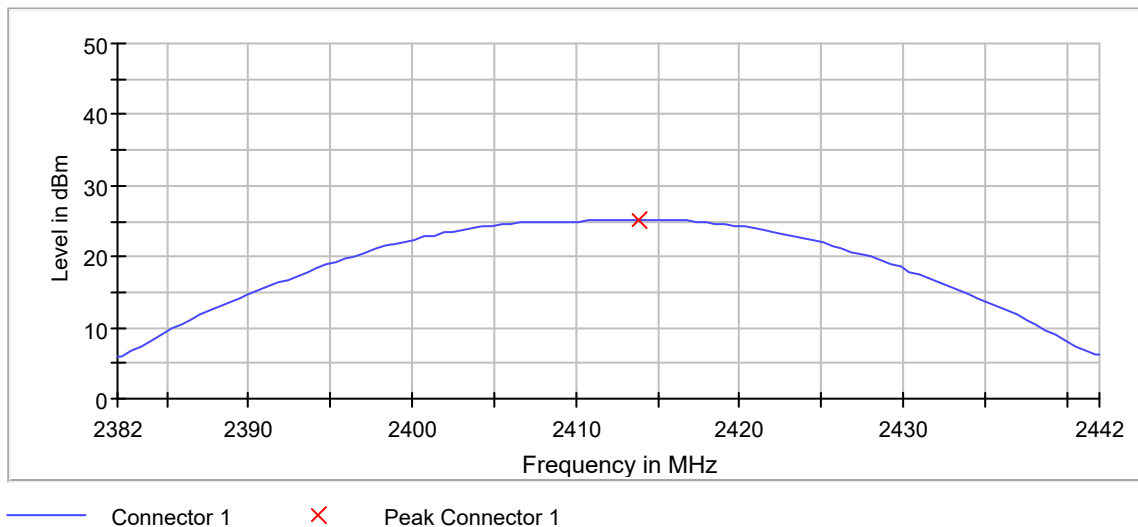

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.550 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2416.075000	3.240	8.0	PASS

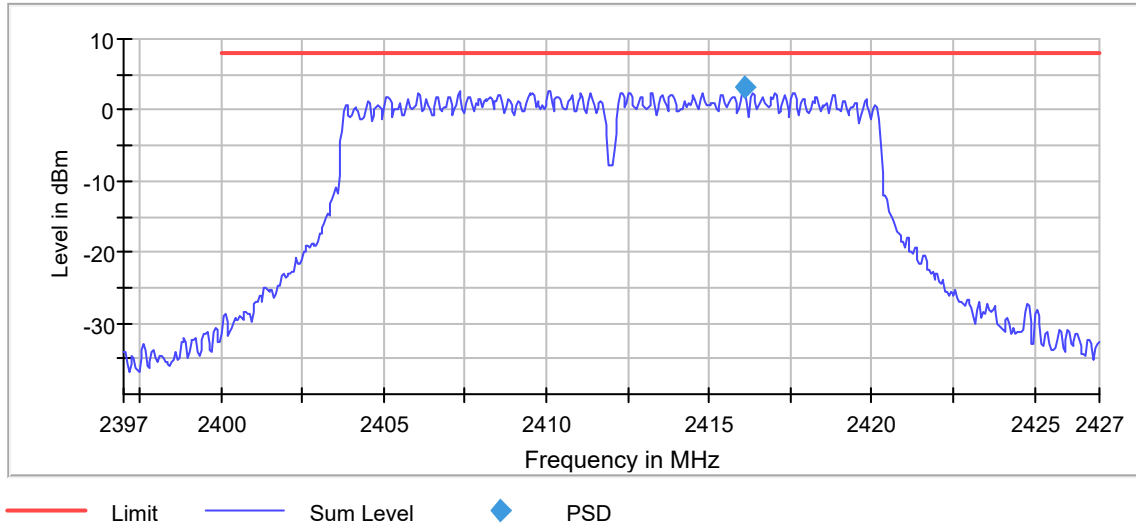

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.46 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.500000	---	---	2403.750000	2420.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

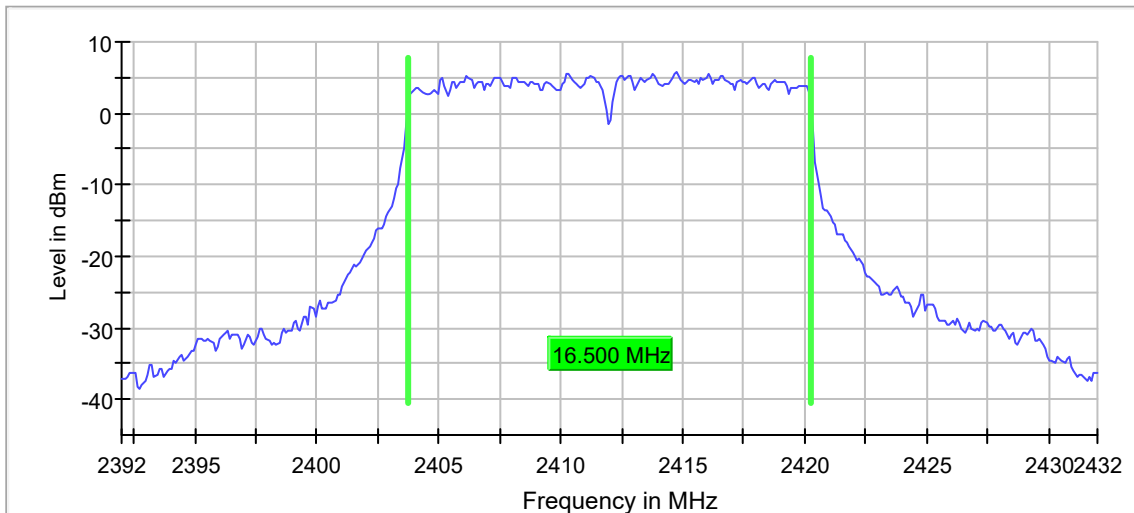

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2416.075000	4.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.825000	-29.6	13.6	-16.0	PASS
2399.775000	-29.7	13.7	-16.0	PASS
2399.875000	-30.1	14.1	-16.0	PASS
2399.525000	-30.7	14.7	-16.0	PASS
2399.575000	-30.8	14.8	-16.0	PASS
2399.475000	-30.9	14.9	-16.0	PASS
2399.125000	-31.1	15.1	-16.0	PASS
2398.875000	-31.2	15.2	-16.0	PASS
2399.075000	-31.2	15.2	-16.0	PASS
2399.975000	-31.5	15.5	-16.0	PASS
2399.175000	-31.6	15.6	-16.0	PASS
2399.925000	-31.8	15.8	-16.0	PASS
2399.225000	-31.8	15.8	-16.0	PASS
2396.325000	-31.8	15.8	-16.0	PASS
2398.825000	-31.8	15.8	-16.0	PASS

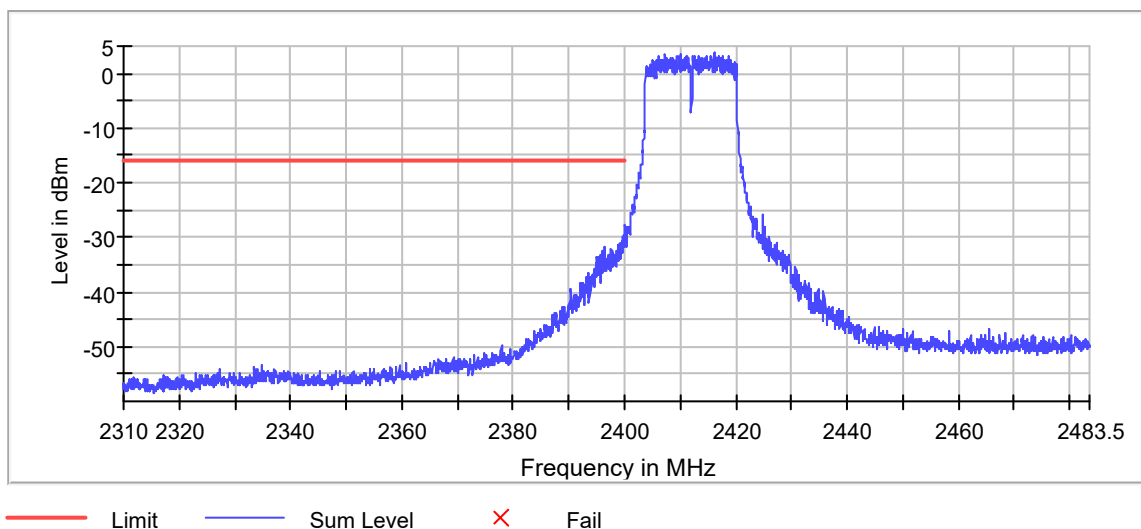

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.43 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.27 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.550000	0.500000	---	2428.725000	2445.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	4.6	PASS

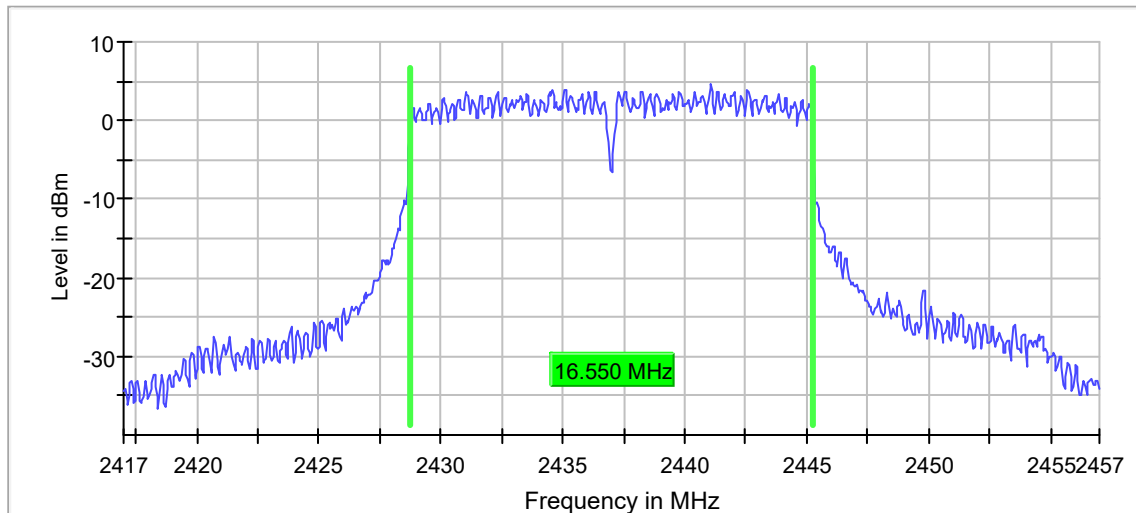

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.10 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.3	30.0	PASS

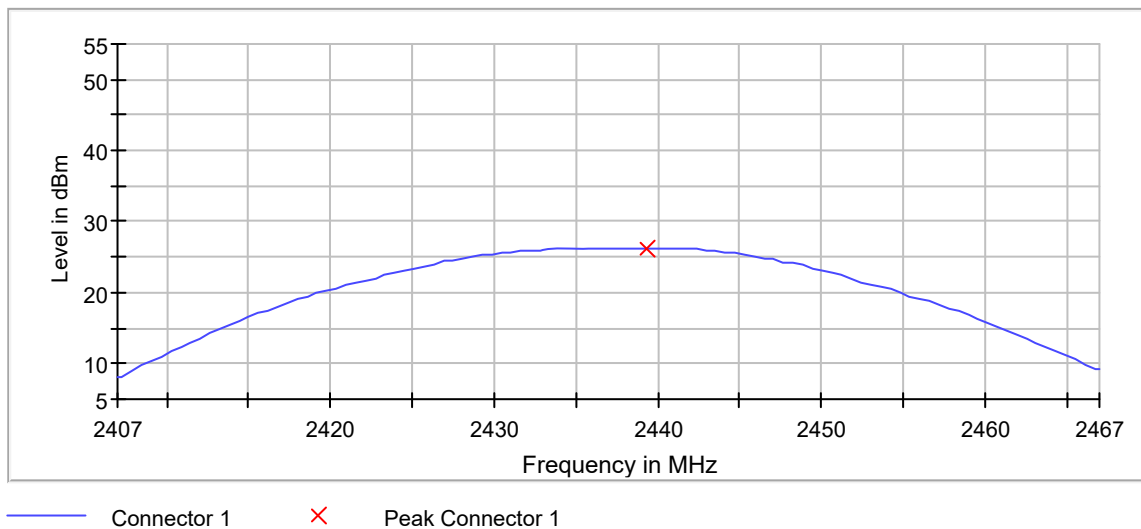

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.550 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2441.075000	4.525	8.0	PASS

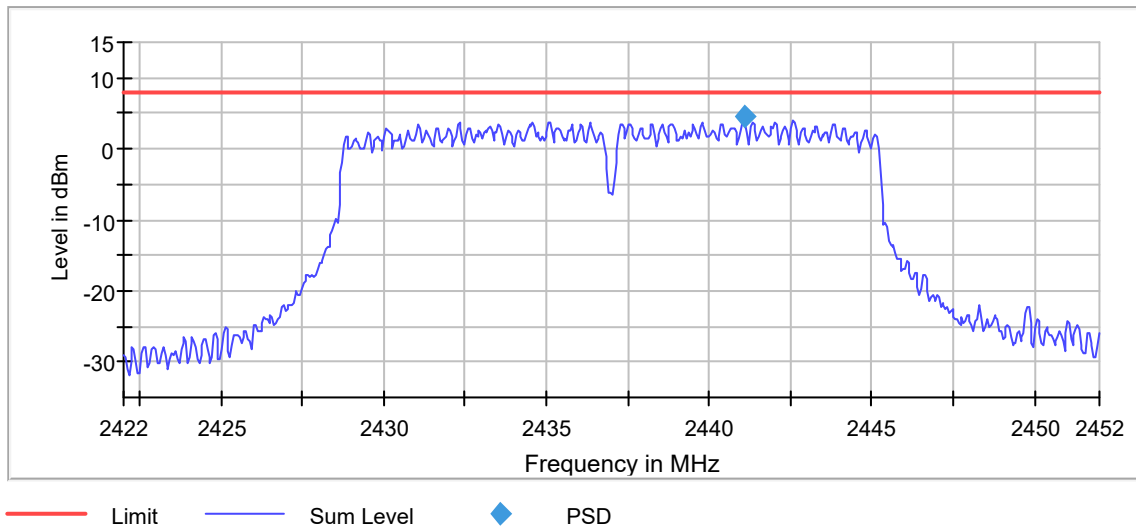

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.13 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.500000	---	---	2428.750000	2445.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

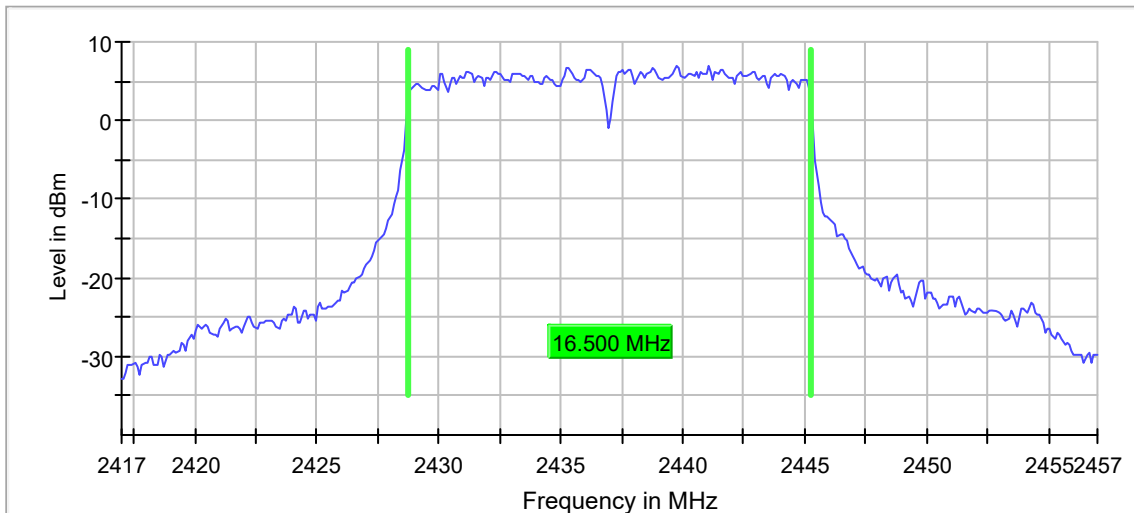

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	11 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.25 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.550000	0.500000	---	2463.725000	2480.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-10.2	PASS

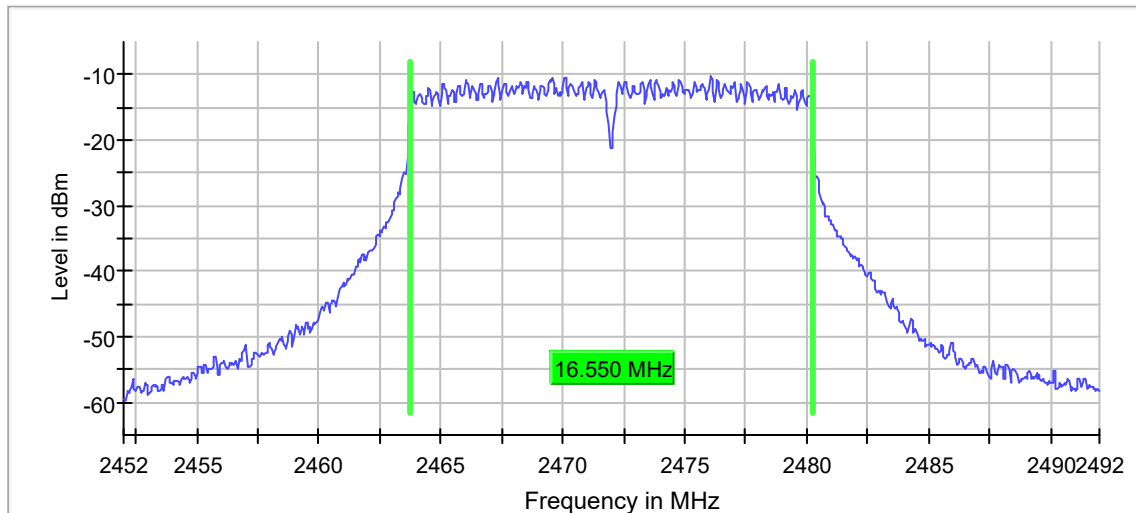

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.16 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	12.5	30.0	PASS

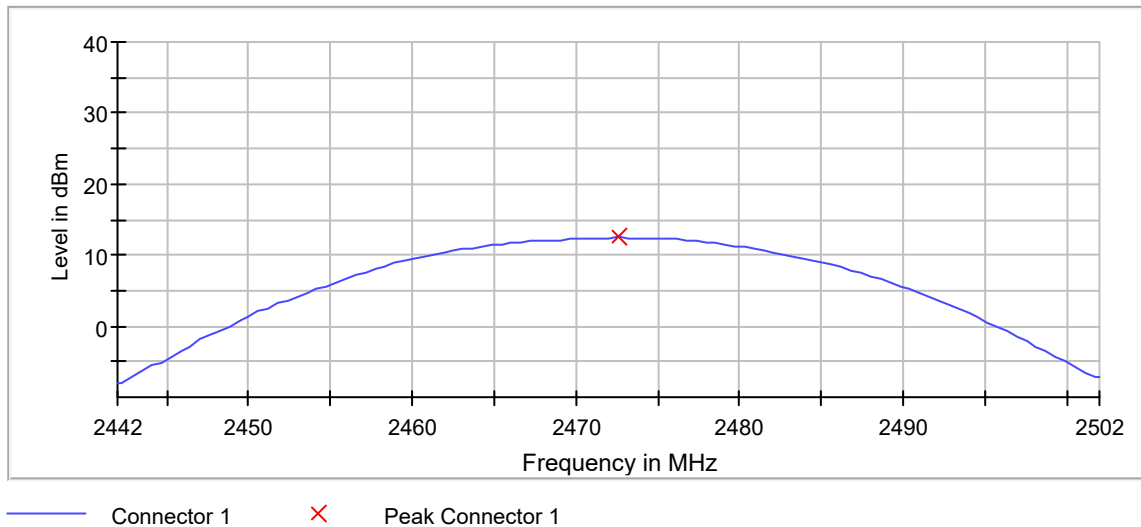

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.550 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2476.075000	-10.675	8.0	PASS

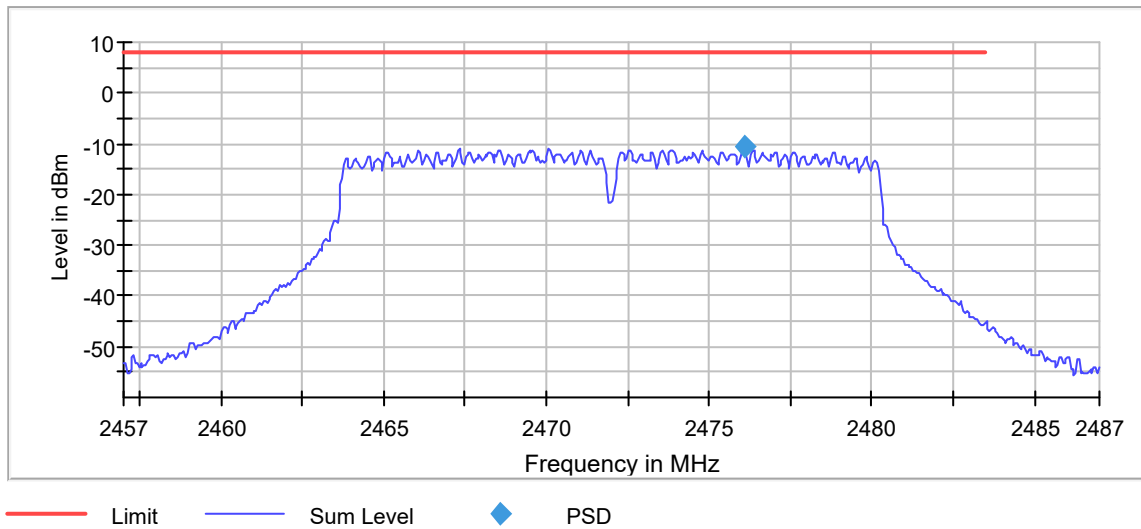

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.19 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.500000	---	---	2463.750000	2480.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

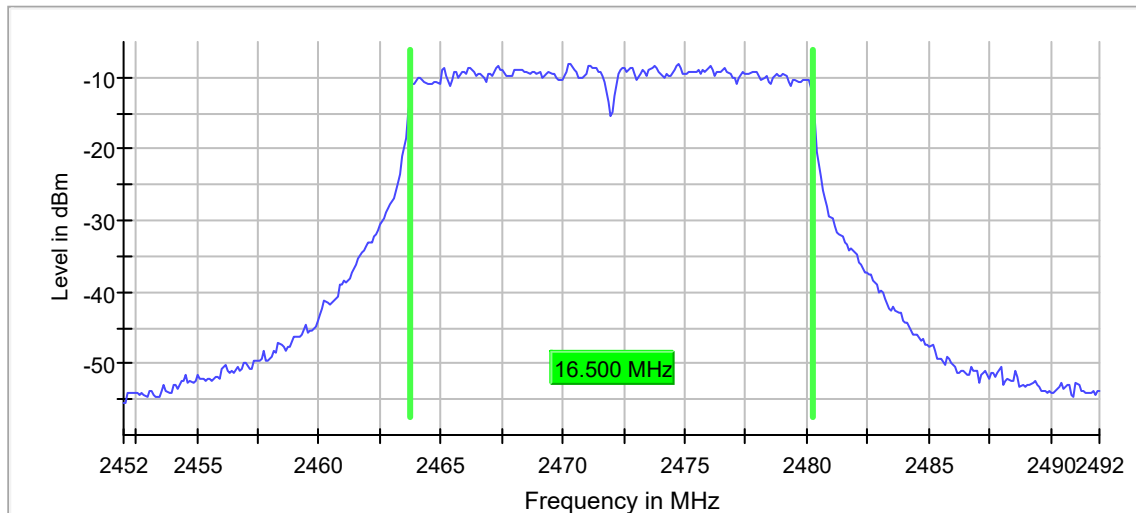

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

802.11g, 36MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.550000	0.500000	---	2403.725000	2420.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.4	PASS

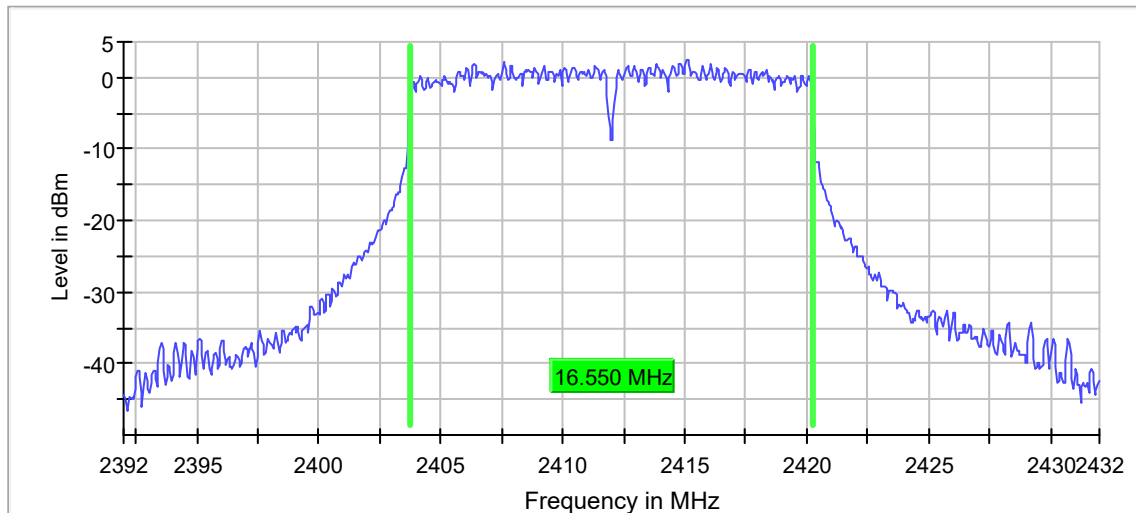

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.15 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.9	30.0	PASS

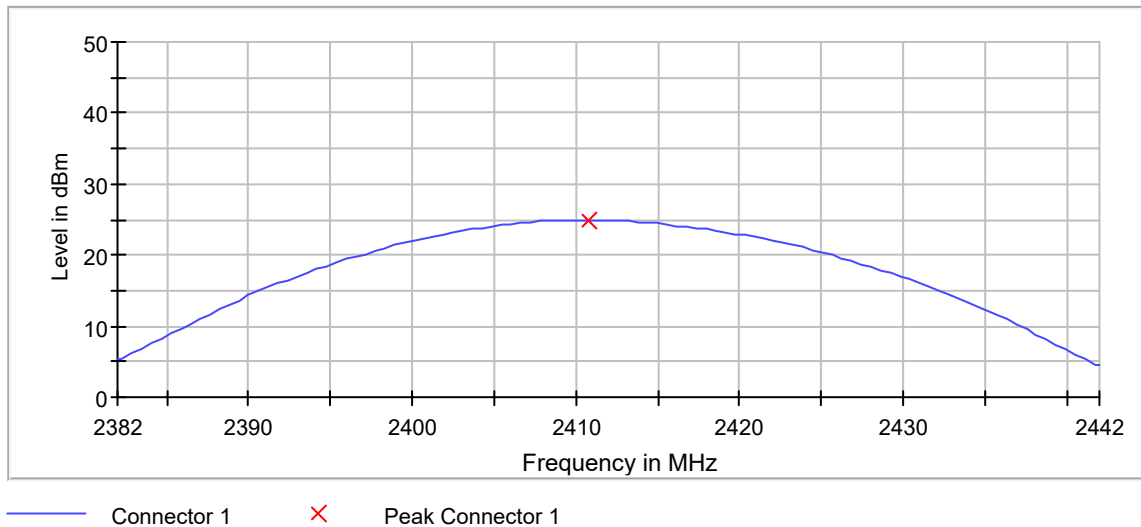

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.550 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2415.125000	2.809	8.0	PASS

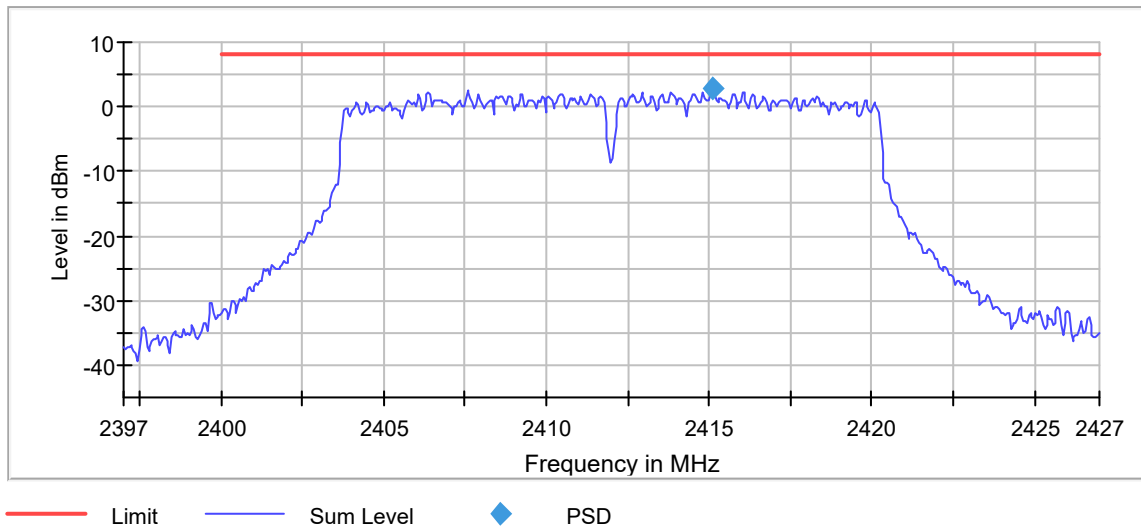

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.11 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.500000	---	---	2403.750000	2420.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

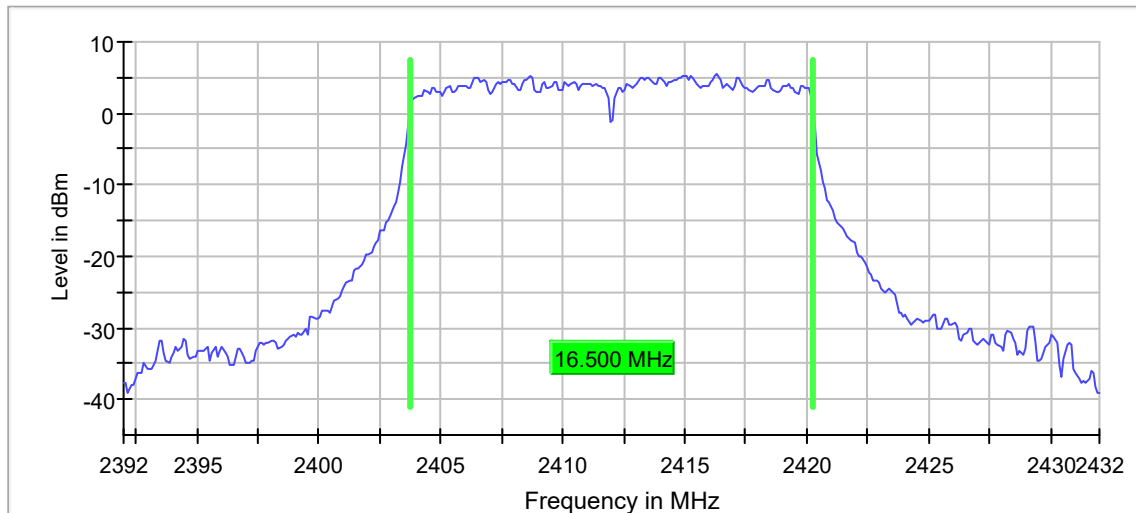

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	15 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2415.075000	3.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.675000	-30.1	13.6	-16.4	PASS
2399.725000	-30.1	13.7	-16.4	PASS
2399.975000	-30.6	14.2	-16.4	PASS
2399.925000	-30.8	14.4	-16.4	PASS
2399.625000	-31.0	14.6	-16.4	PASS
2399.775000	-31.2	14.7	-16.4	PASS
2399.875000	-31.5	15.1	-16.4	PASS
2399.825000	-32.0	15.5	-16.4	PASS
2399.475000	-32.3	15.9	-16.4	PASS
2399.425000	-32.5	16.1	-16.4	PASS
2397.575000	-32.7	16.2	-16.4	PASS
2397.625000	-33.0	16.5	-16.4	PASS
2399.525000	-33.0	16.6	-16.4	PASS
2399.125000	-33.0	16.6	-16.4	PASS
2395.125000	-33.3	16.9	-16.4	PASS

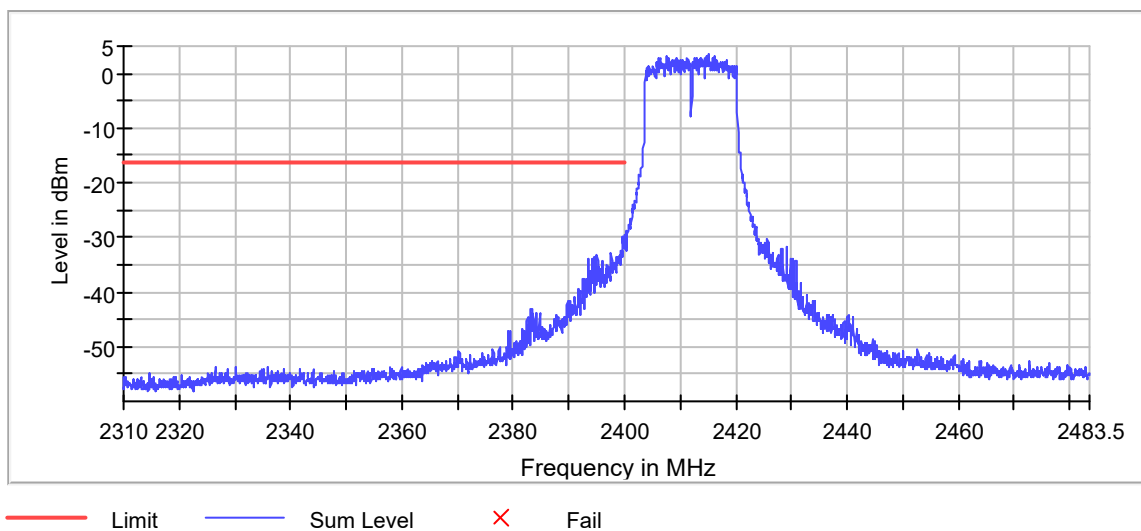

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.550000	0.500000	---	2428.725000	2445.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	4.1	PASS

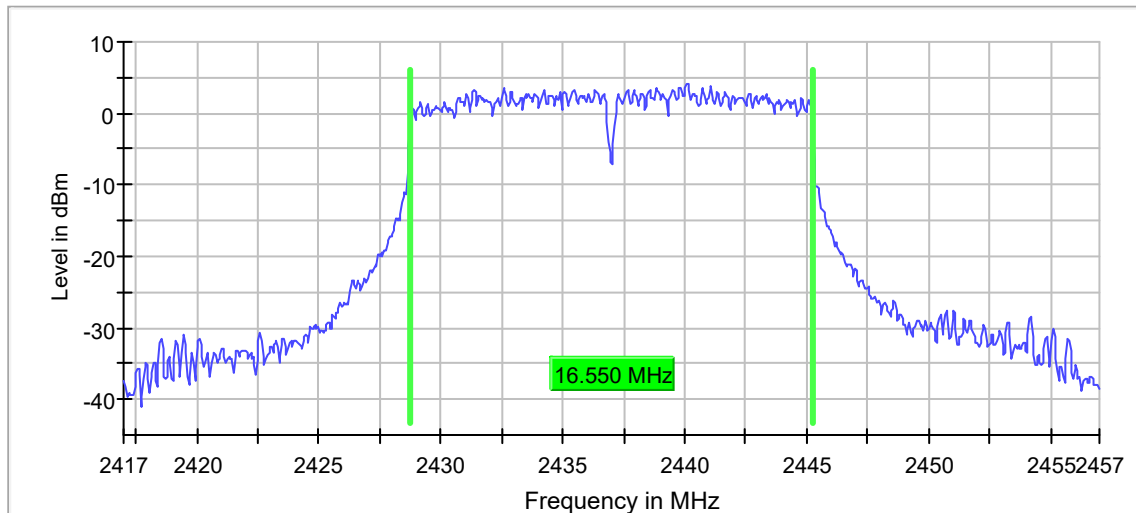

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.8	30.0	PASS

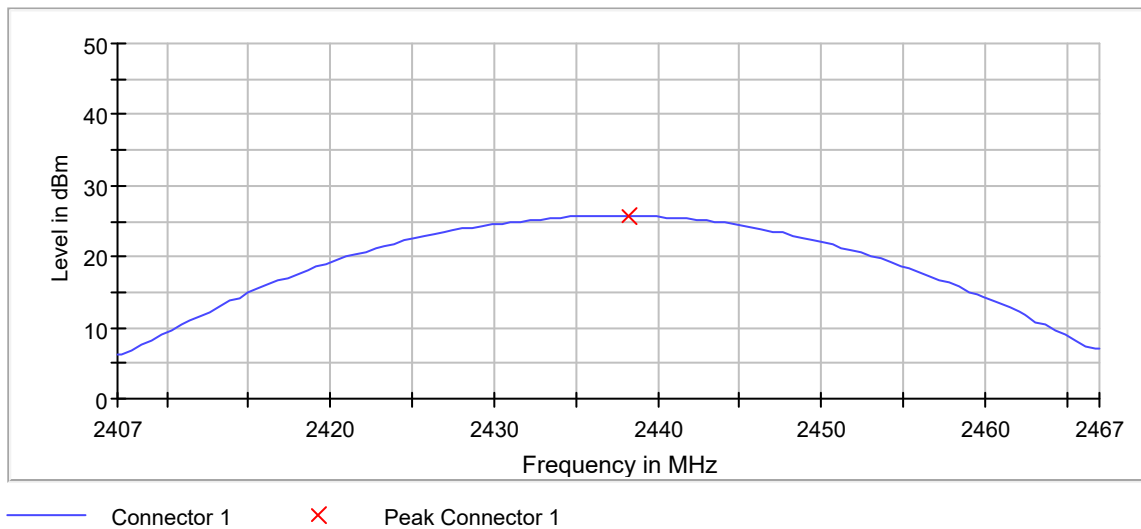

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.550 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2440.075000	4.046	8.0	PASS

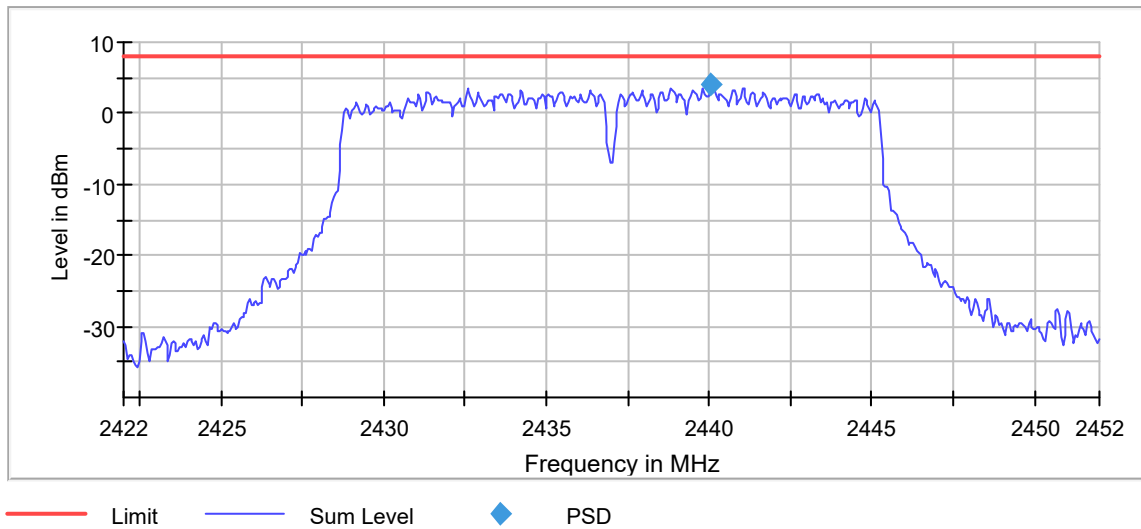

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.25 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.500000	---	---	2428.750000	2445.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

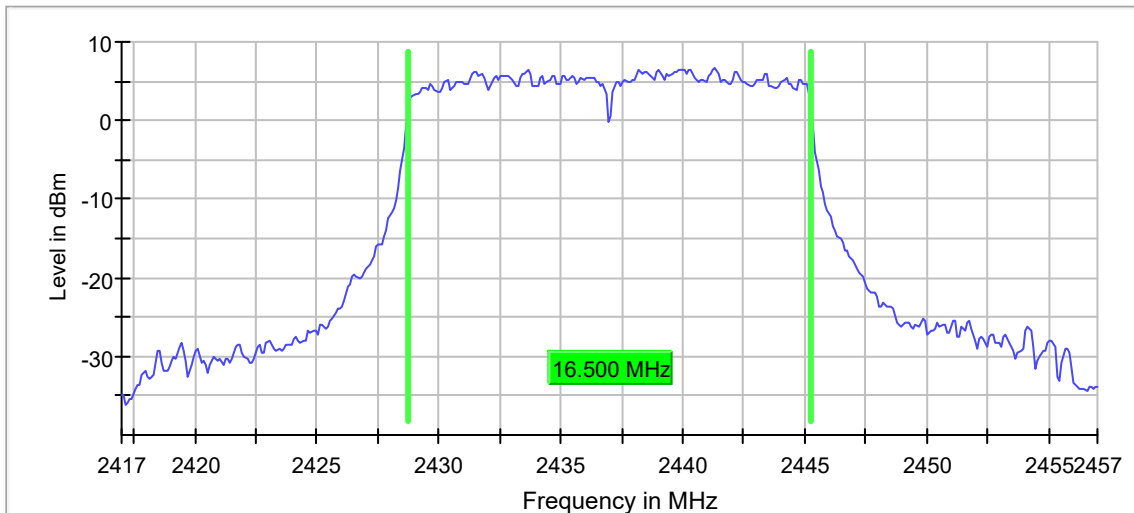

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	19 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.02 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.600000	0.500000	---	2463.675000	2480.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-10.6	PASS

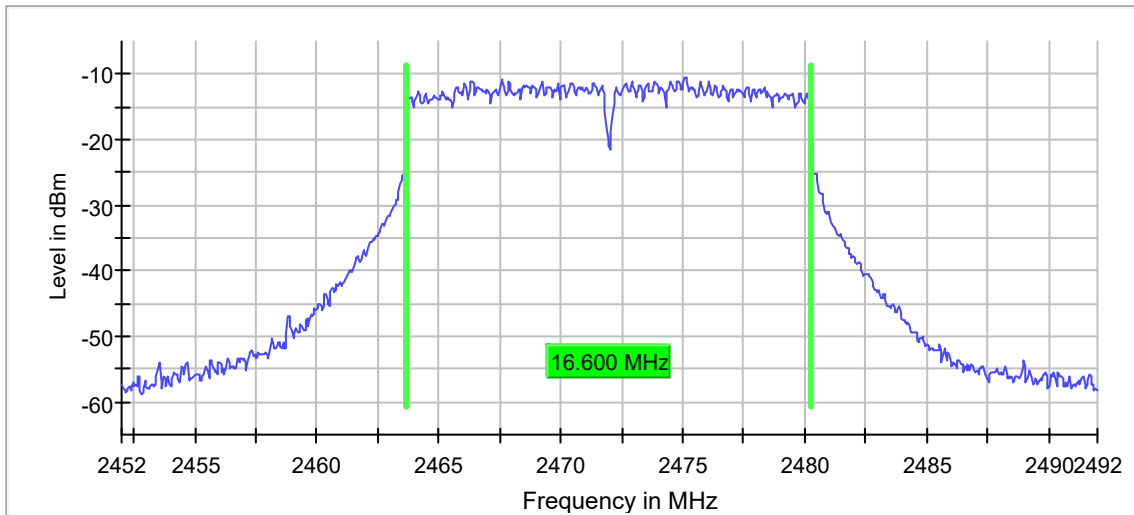

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.11 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	12.4	30.0	PASS

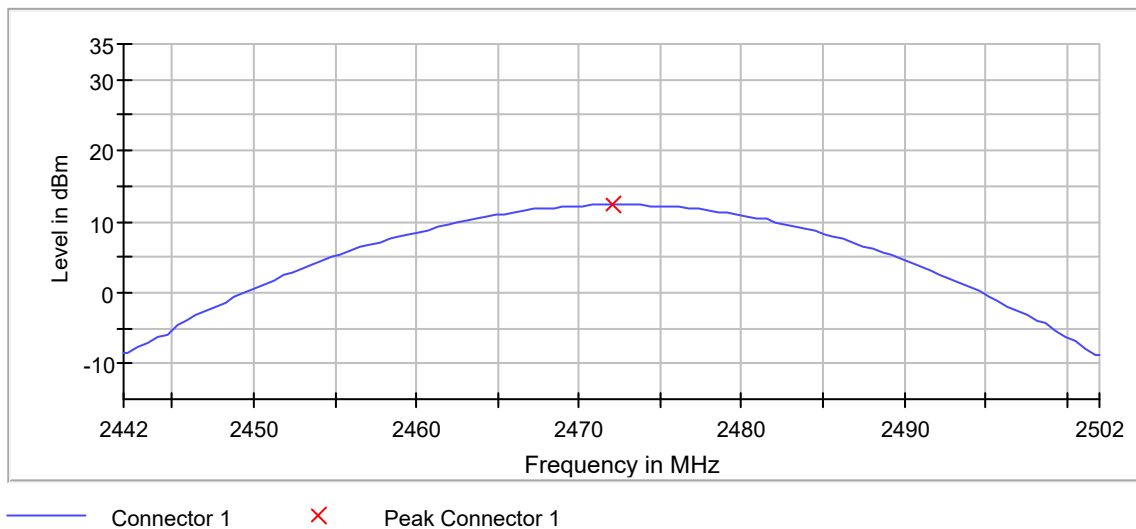

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.600 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2475.125000	-10.598	8.0	PASS

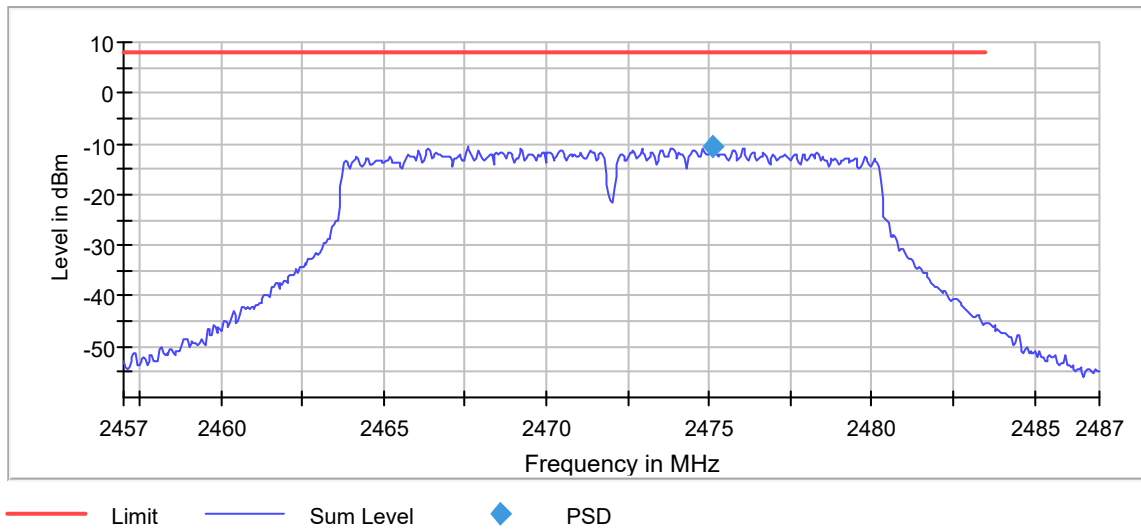

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.25 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.500000	---	---	2463.750000	2480.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

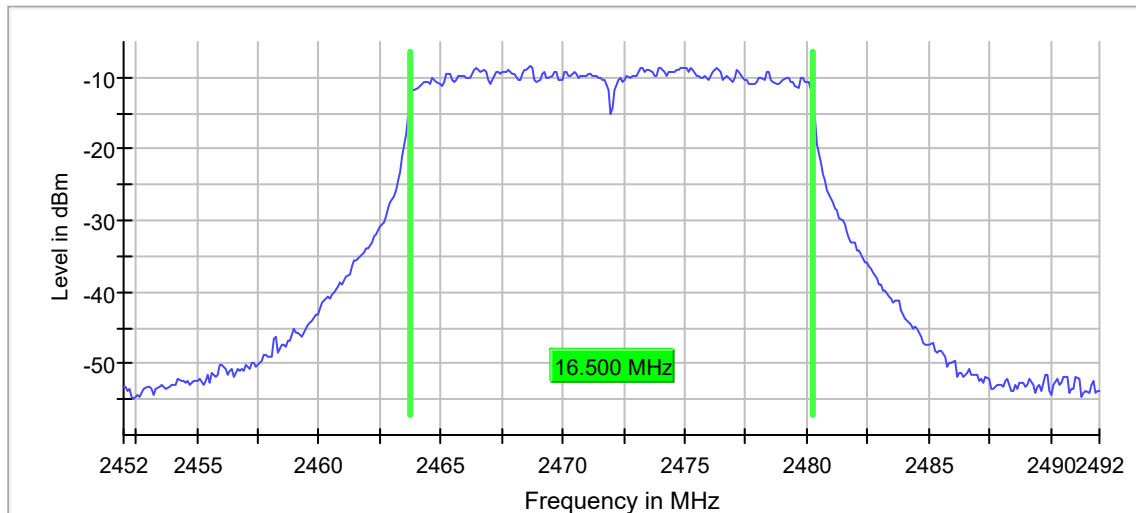

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

802.11g, 48MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.550000	0.500000	---	2403.725000	2420.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	3.7	PASS

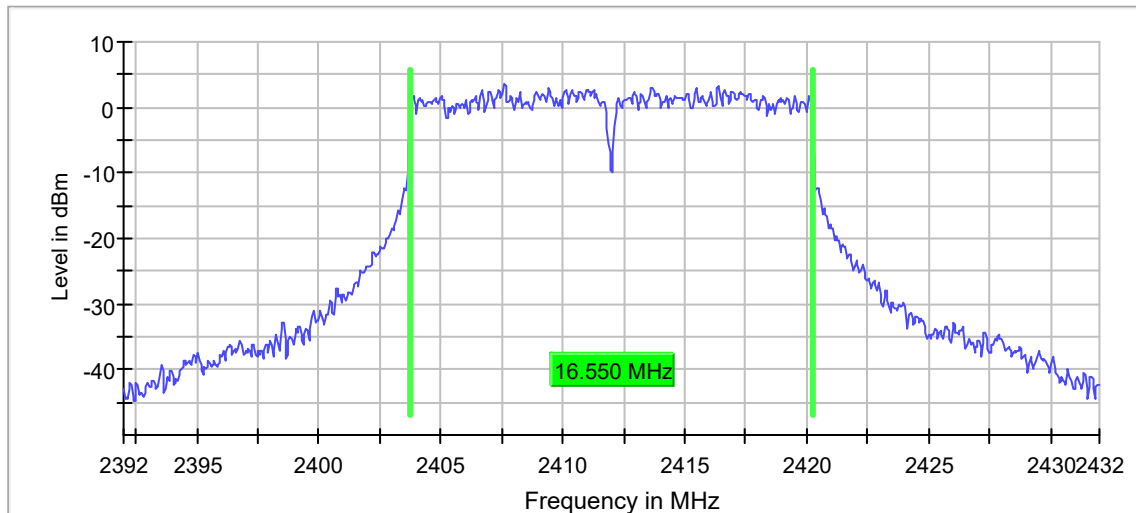

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.27 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.8	30.0	PASS

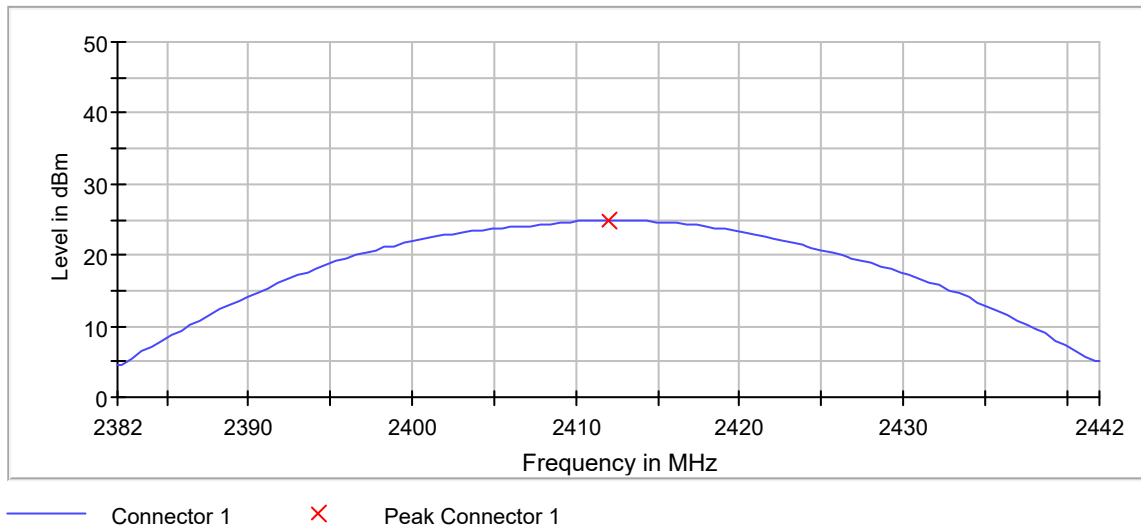

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.550 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.02 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2407.625000	3.464	8.0	PASS

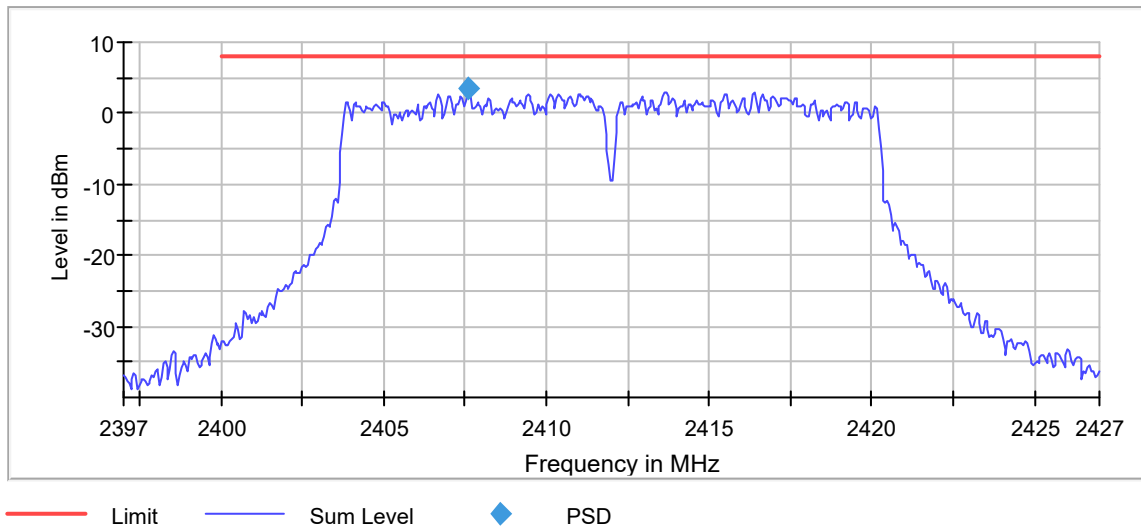

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.35 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.500000	---	---	2403.750000	2420.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

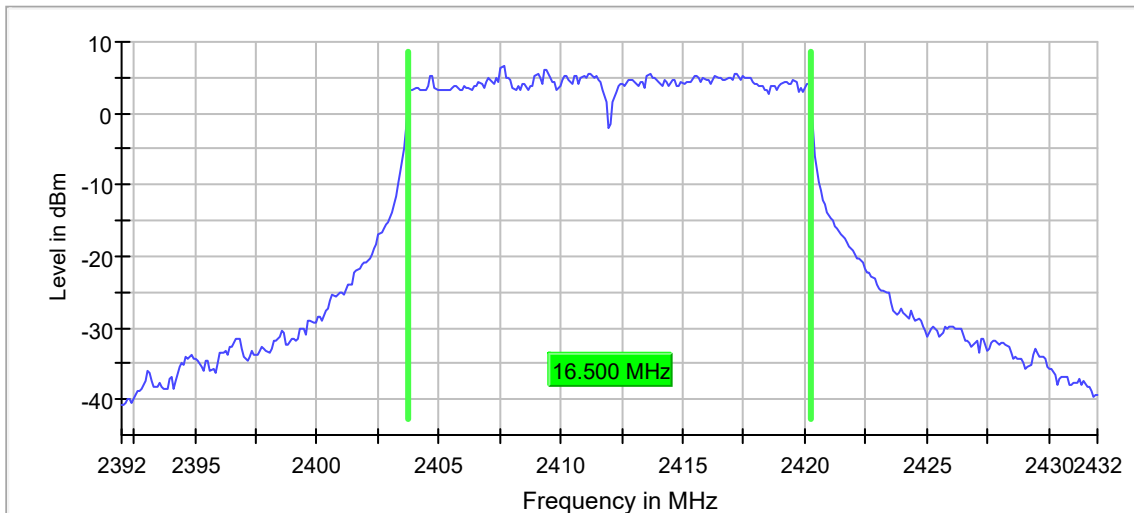

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.05 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2407.575000	4.3

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-30.2	14.4	-15.7	PASS
2399.825000	-31.0	15.3	-15.7	PASS
2399.725000	-31.2	15.5	-15.7	PASS
2399.975000	-31.4	15.7	-15.7	PASS
2398.525000	-31.5	15.8	-15.7	PASS
2399.925000	-31.9	16.2	-15.7	PASS
2398.475000	-31.9	16.2	-15.7	PASS
2398.575000	-32.0	16.3	-15.7	PASS
2399.875000	-32.3	16.6	-15.7	PASS
2399.475000	-32.5	16.8	-15.7	PASS
2399.525000	-32.9	17.2	-15.7	PASS
2399.075000	-33.0	17.3	-15.7	PASS
2399.675000	-33.2	17.5	-15.7	PASS
2399.175000	-33.2	17.5	-15.7	PASS
2399.575000	-33.3	17.5	-15.7	PASS

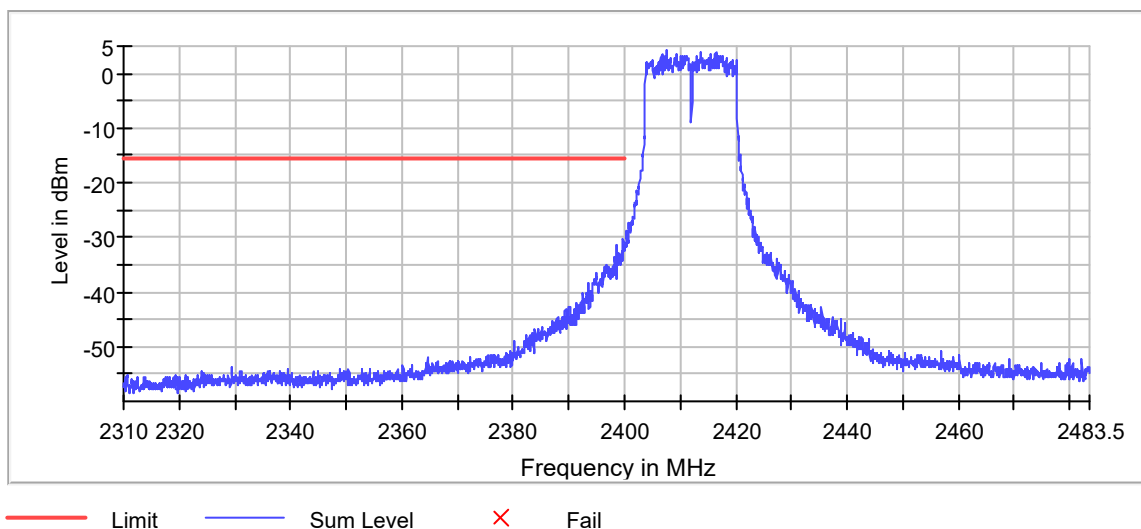

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.43 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.550000	0.500000	---	2428.725000	2445.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	4.1	PASS

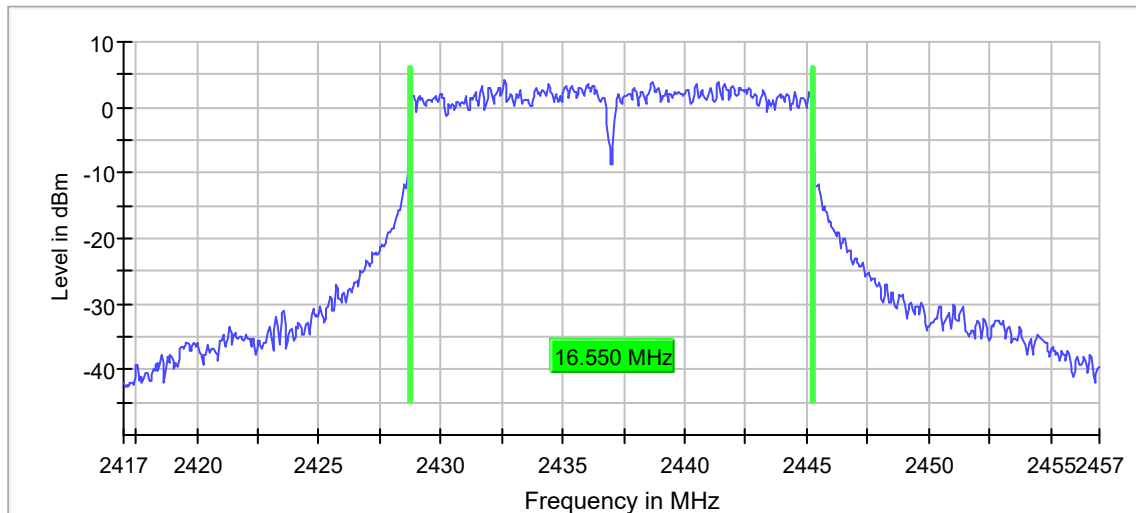

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.28 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.7	30.0	PASS

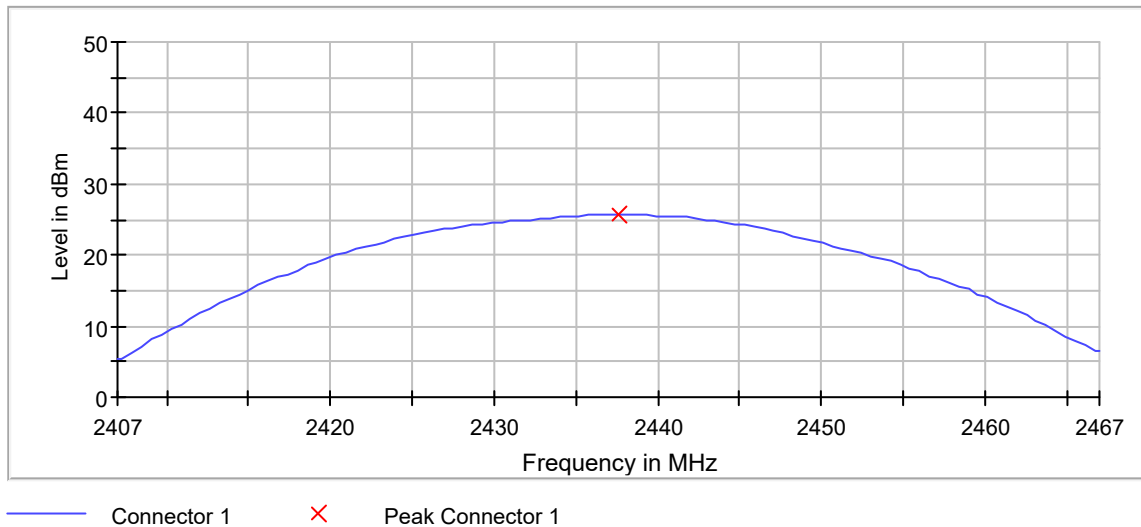

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.550 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.03 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2432.625000	4.037	8.0	PASS

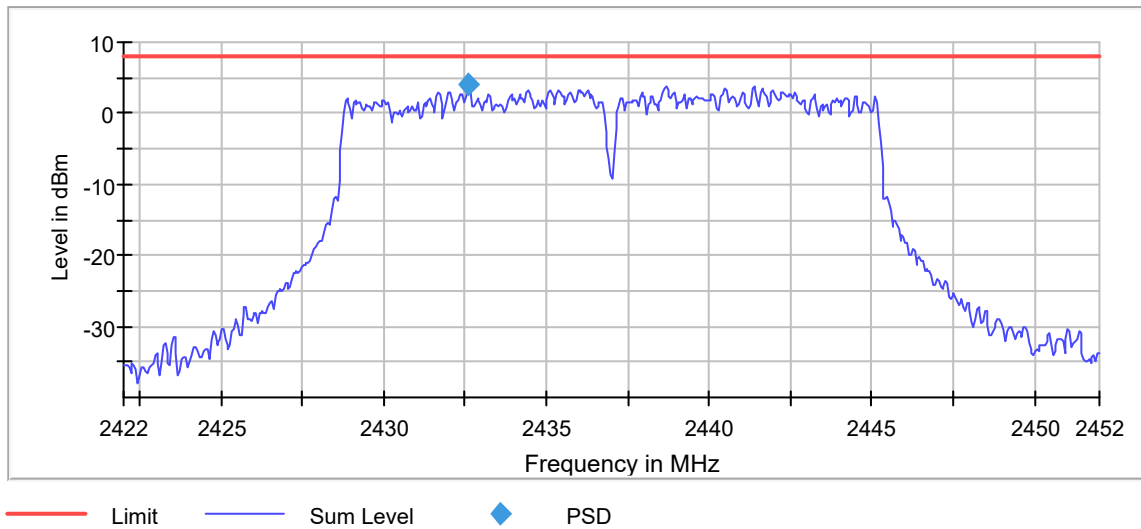

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.35 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.500000	---	---	2428.750000	2445.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

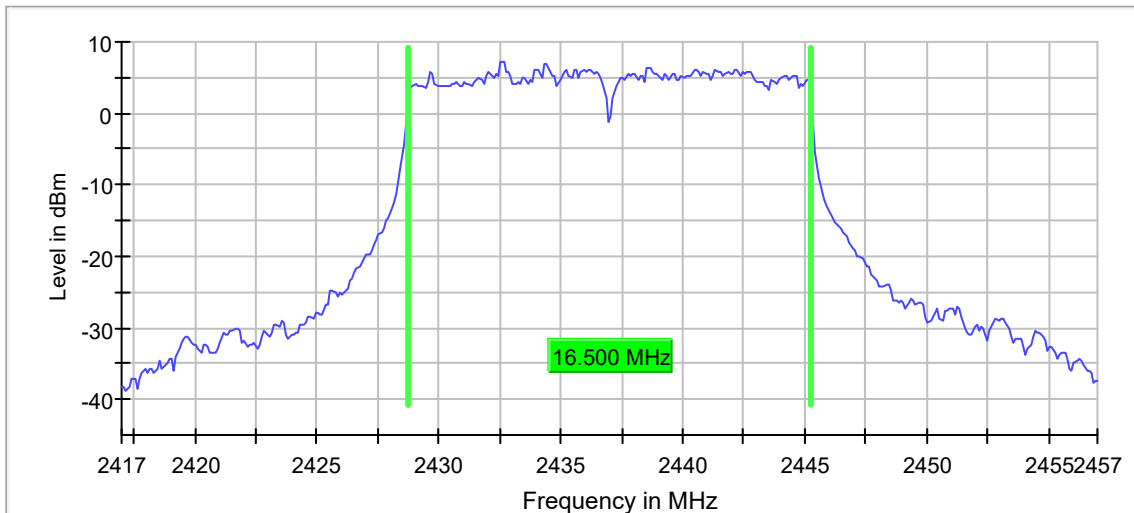

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.500000	0.500000	---	2463.725000	2480.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-9.8	PASS

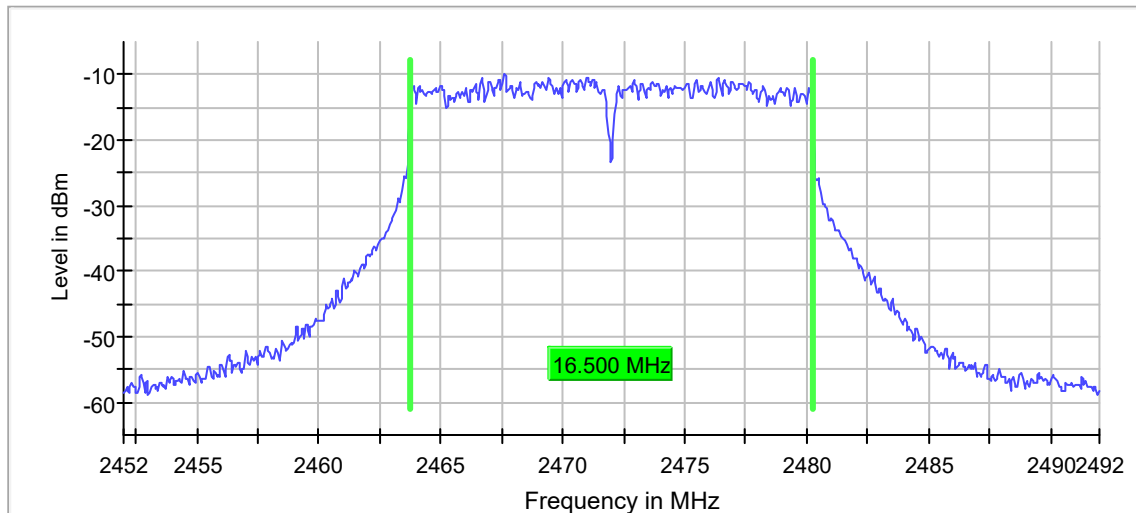

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.43 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	12.0	30.0	PASS

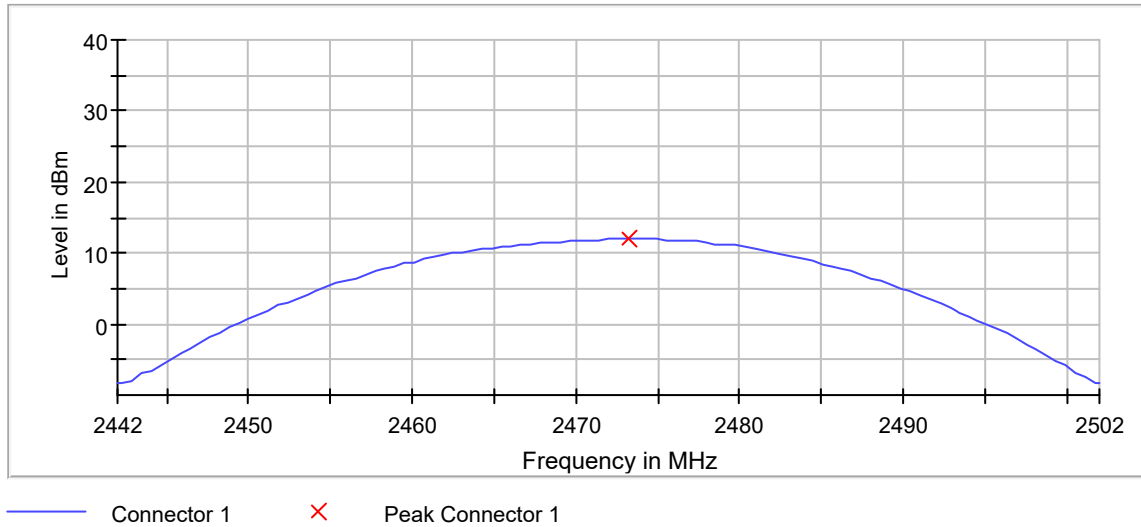

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.500 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2473.675000	-10.357	8.0	PASS

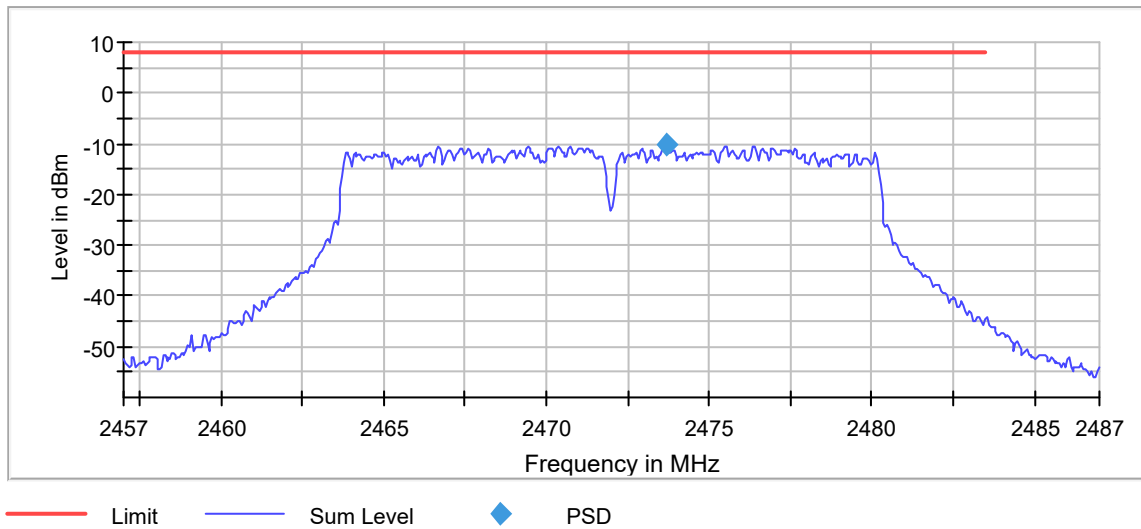

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.43 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.500000	---	---	2463.750000	2480.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

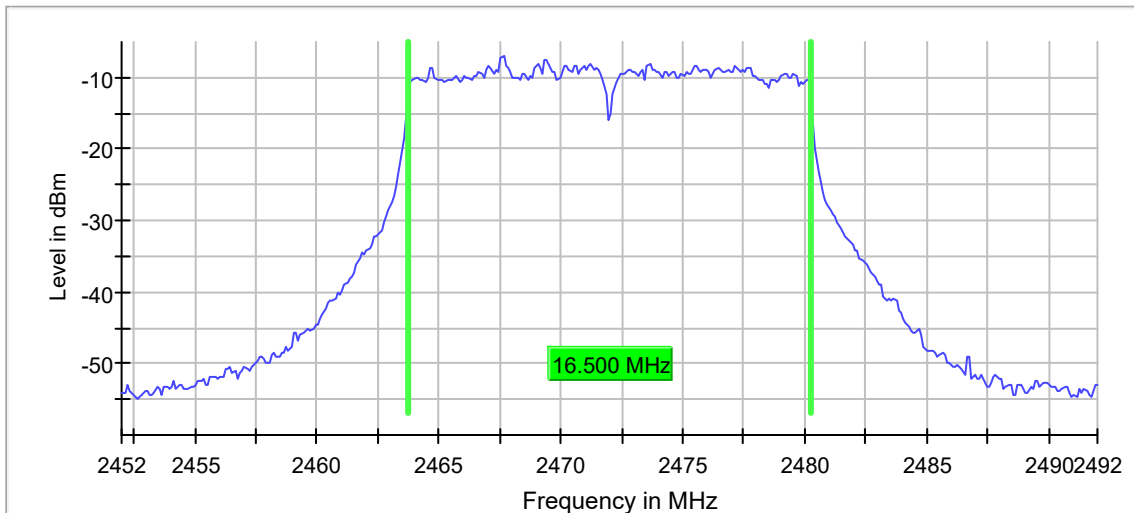

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	15 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.30 dB

802.11g, 54MBPS

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.600000	0.500000	---	2403.675000	2420.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	3.3	PASS

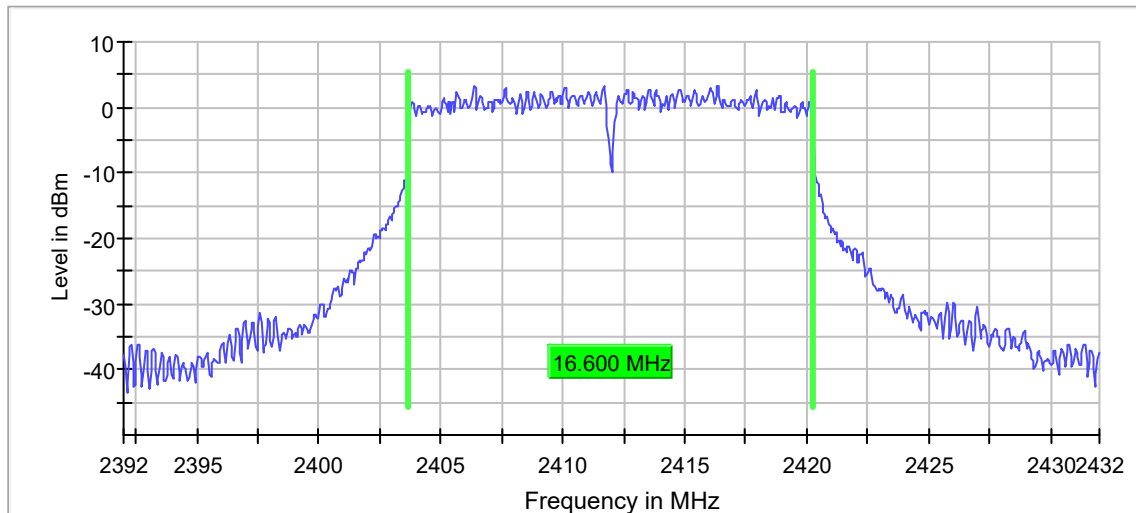

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.16 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	25.4	30.0	PASS

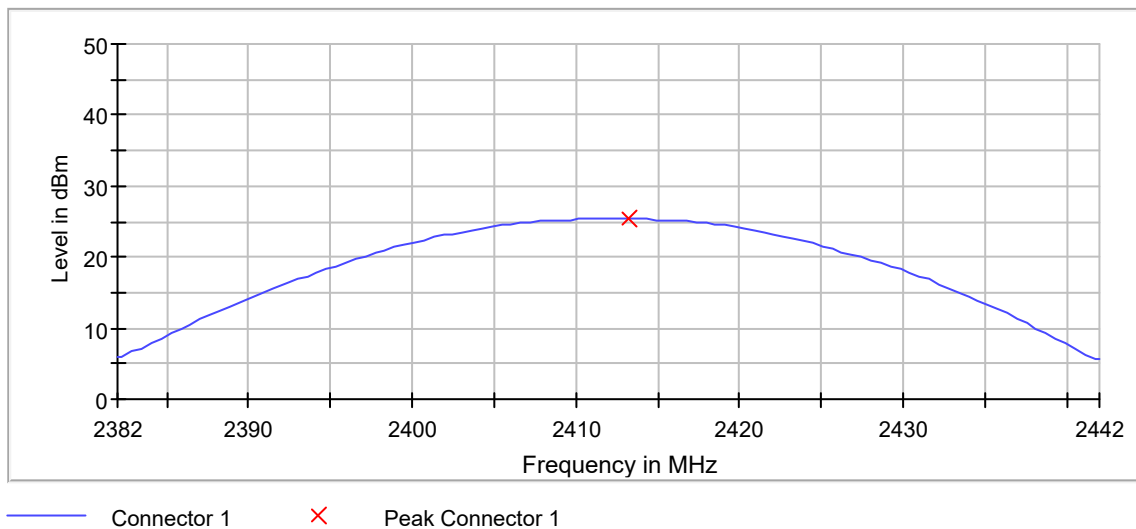

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.600 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2416.325000	3.275	8.0	PASS

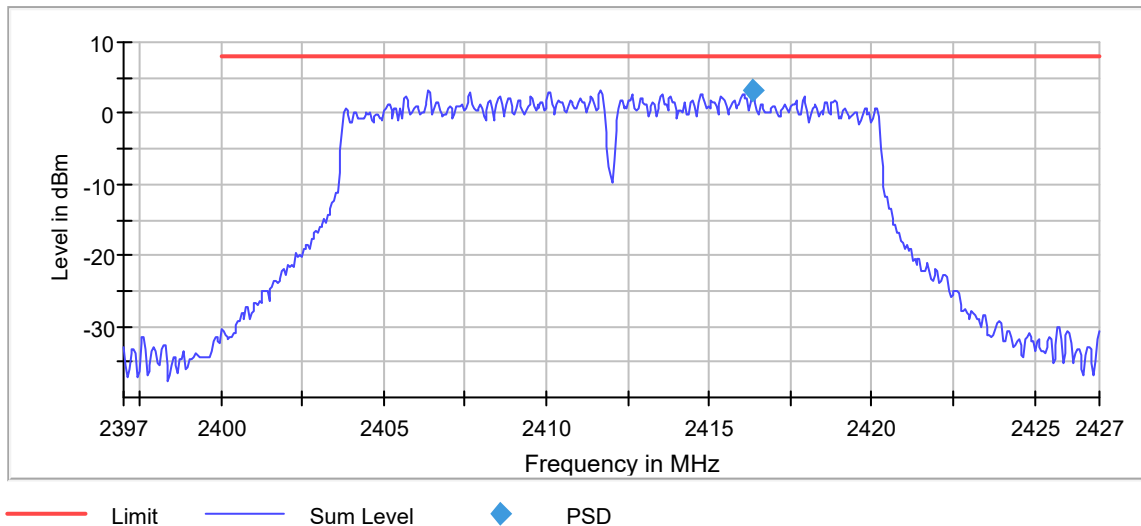

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.24 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.500000	---	---	2403.750000	2420.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

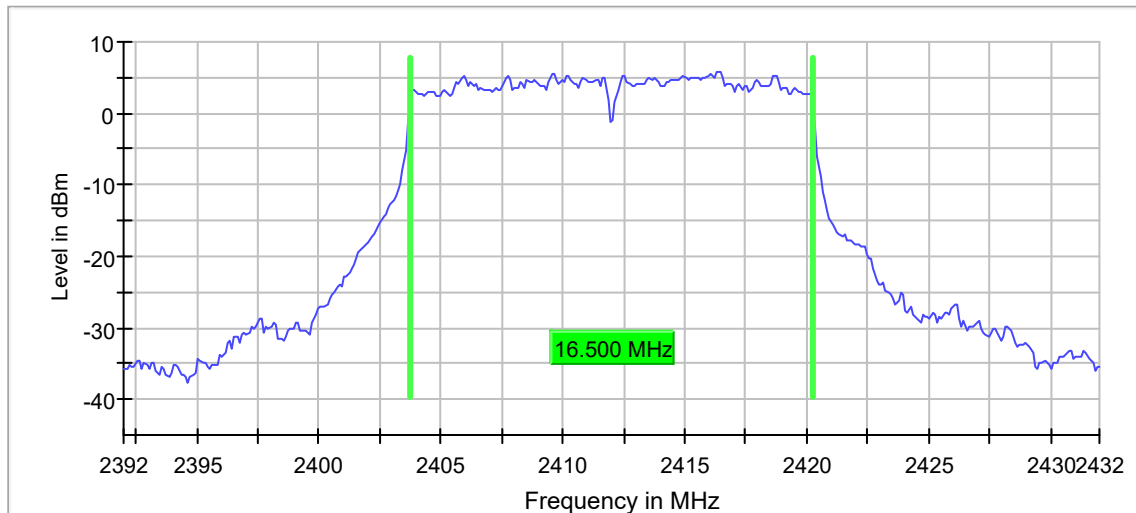

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	17 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2416.325000	4.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2397.575000	-30.0	14.0	-16.0	PASS
2397.625000	-30.3	14.3	-16.0	PASS
2399.825000	-31.1	15.1	-16.0	PASS
2399.925000	-31.1	15.1	-16.0	PASS
2398.225000	-31.2	15.1	-16.0	PASS
2399.975000	-31.2	15.1	-16.0	PASS
2399.775000	-31.2	15.2	-16.0	PASS
2397.525000	-31.2	15.2	-16.0	PASS
2399.875000	-31.3	15.2	-16.0	PASS
2398.175000	-31.5	15.4	-16.0	PASS
2397.275000	-31.9	15.8	-16.0	PASS
2397.675000	-31.9	15.9	-16.0	PASS
2398.275000	-32.0	16.0	-16.0	PASS
2397.225000	-32.0	16.0	-16.0	PASS
2397.325000	-32.1	16.1	-16.0	PASS

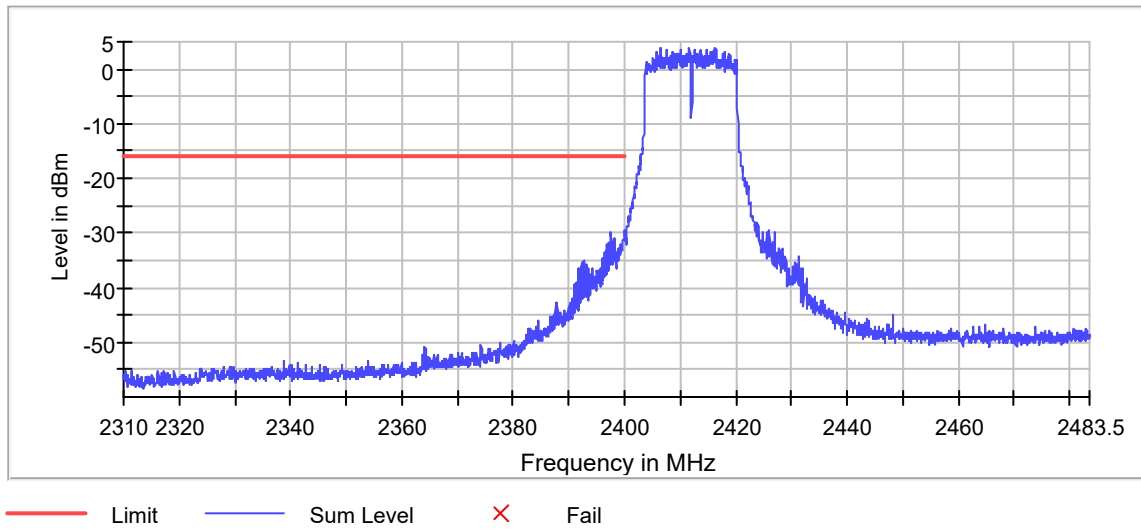

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.35 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.550000	0.500000	---	2428.725000	2445.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	4.1	PASS

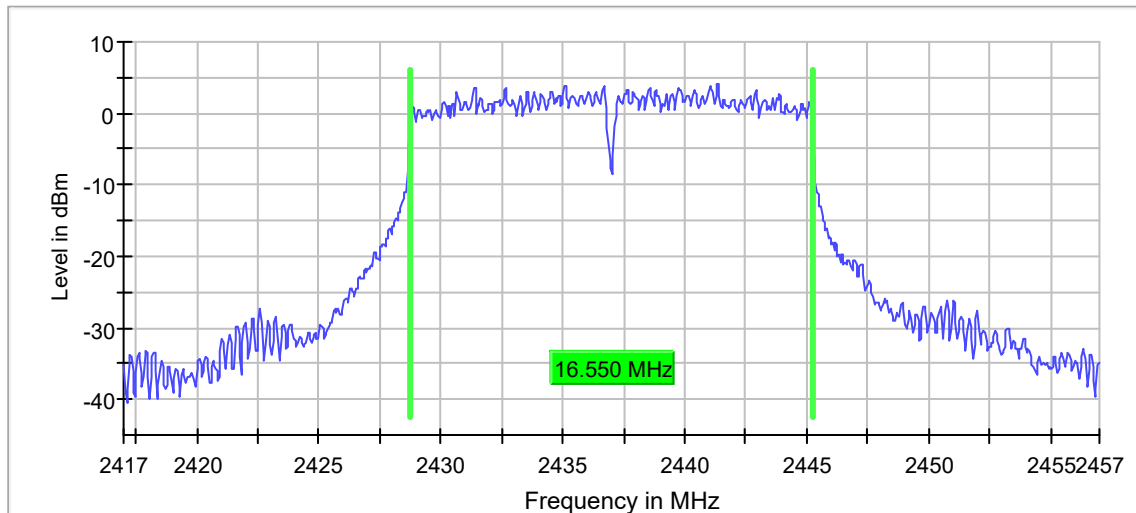

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.23 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.2	30.0	PASS

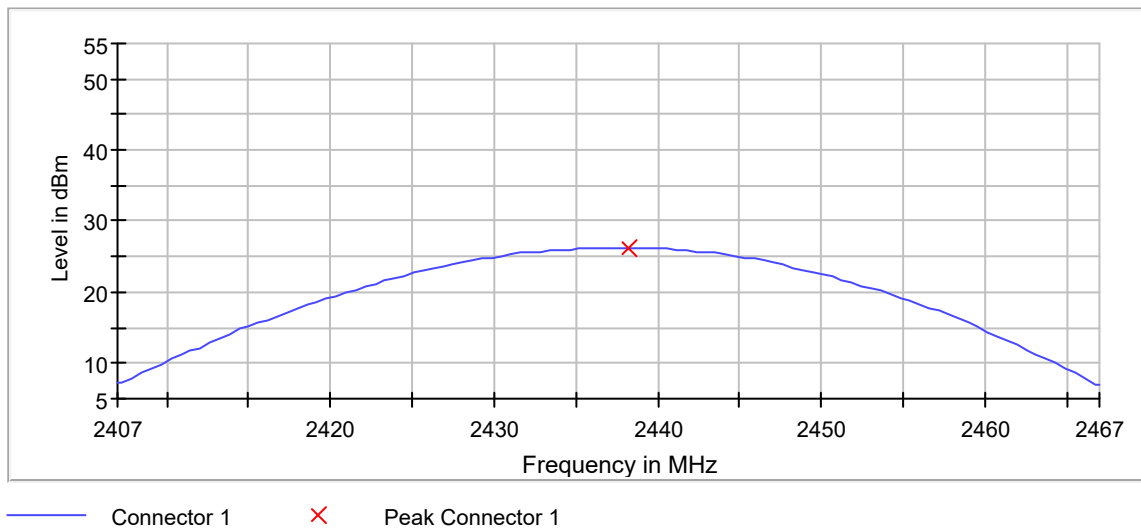

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 16.550 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2441.325000	4.058	8.0	PASS

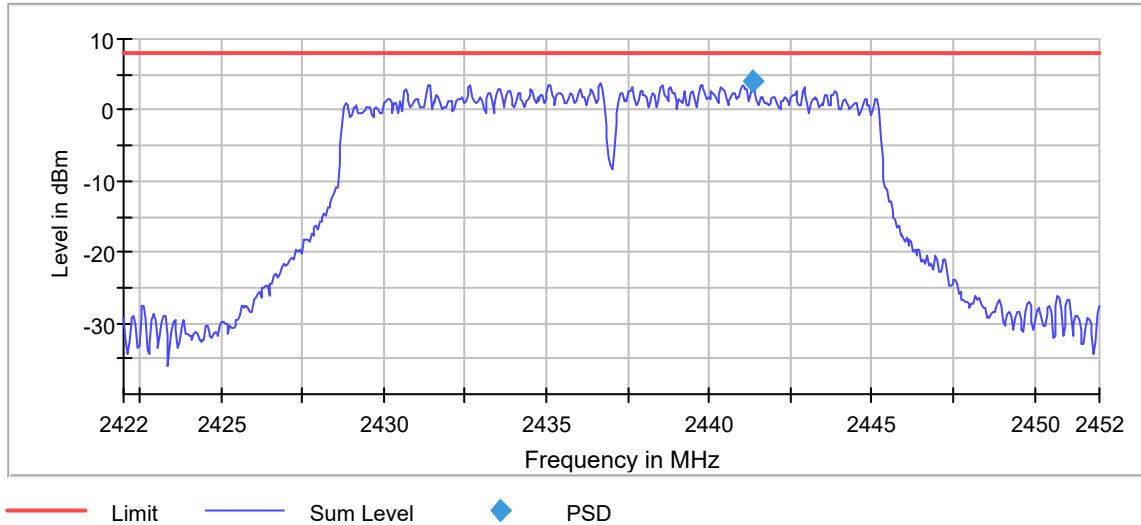

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.22 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	16.500000	---	---	2428.750000	2445.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

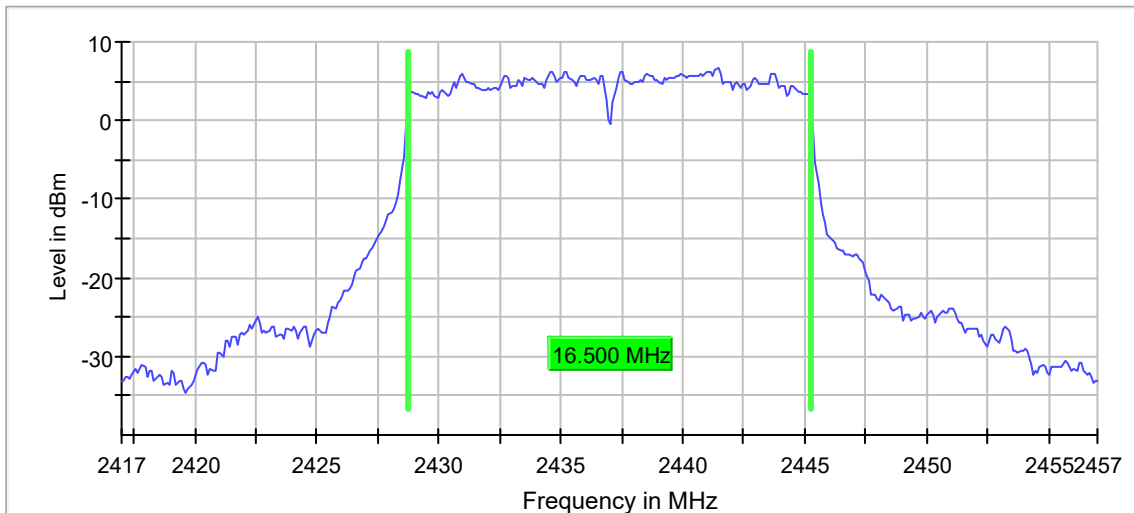

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweptime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.600000	0.500000	---	2463.675000	2480.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-10.2	PASS

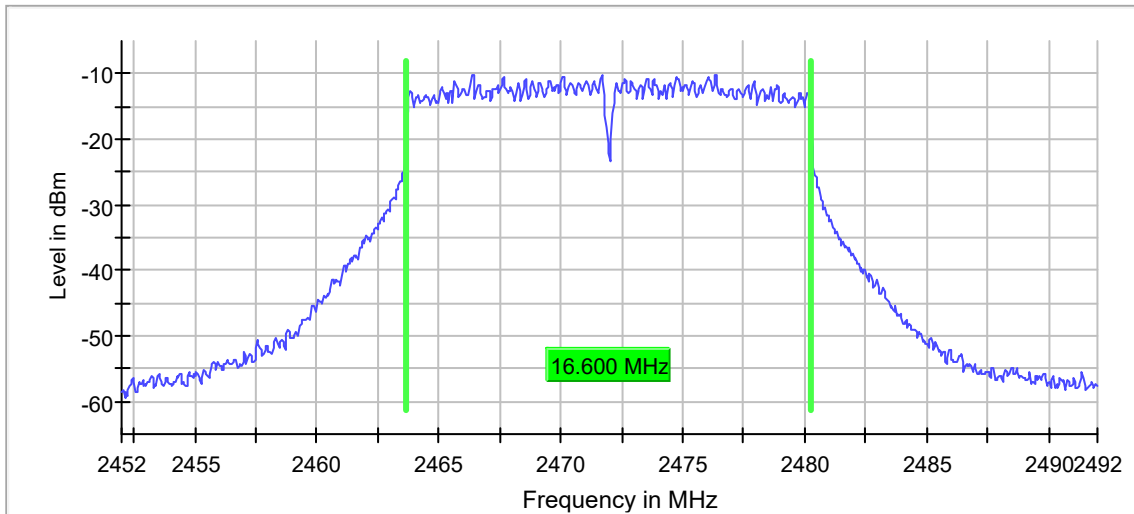

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.15 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	12.2	30.0	PASS

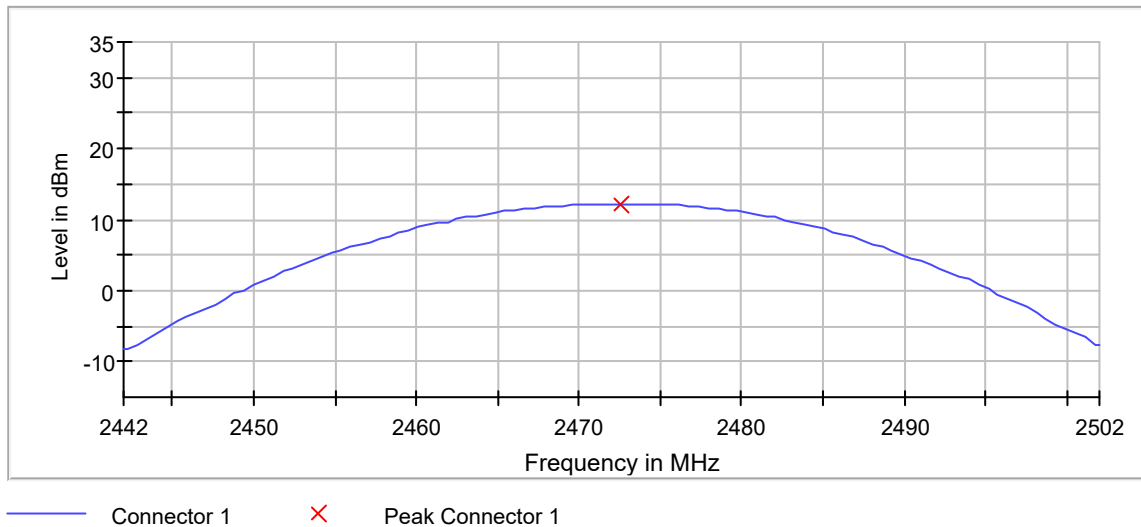

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 16.600 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2476.325000	-10.610	8.0	PASS

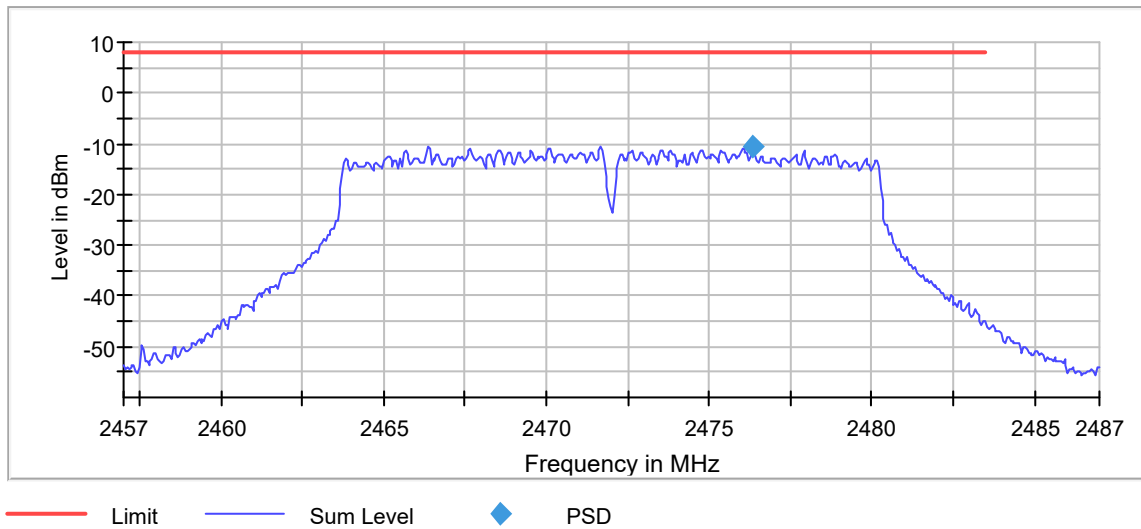

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.15 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	16.500000	---	---	2463.750000	2480.250000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

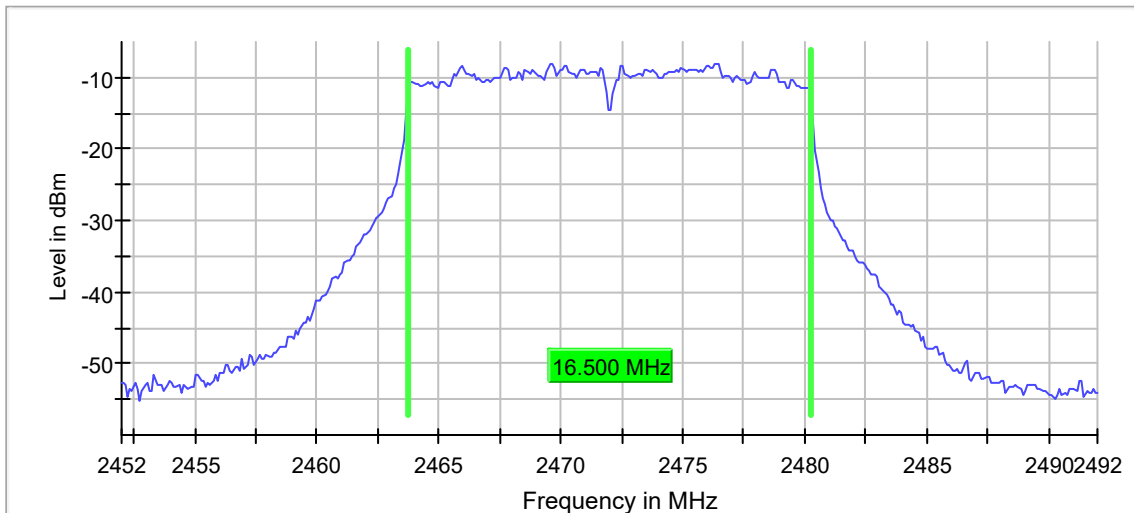

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.30 dB

802.11n, MCS0

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	0.500000	---	2403.125000	2420.825000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.1	PASS

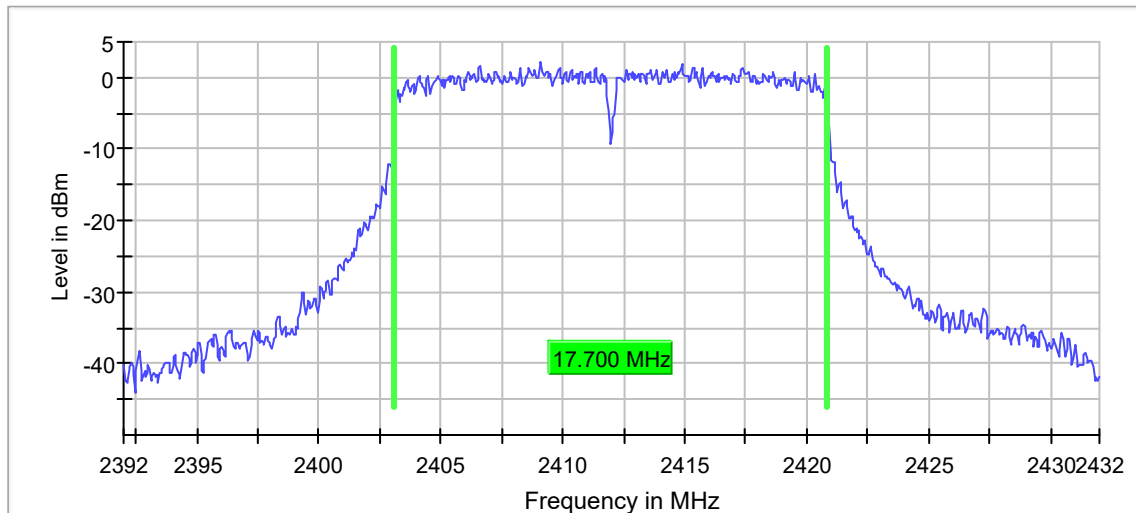

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	23 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.37 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.4	30.0	PASS

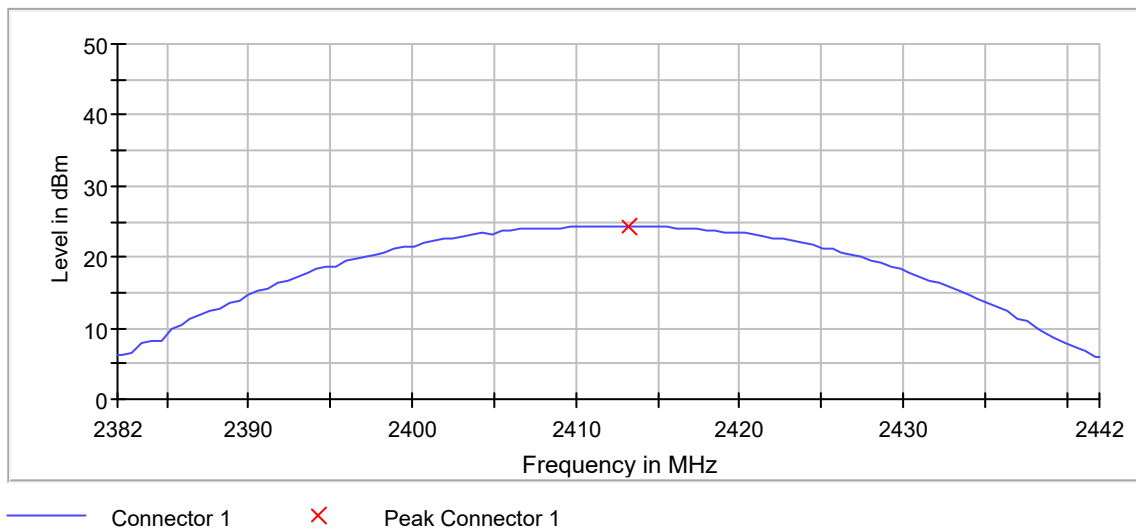

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 17.700 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2409.125000	1.987	8.0	PASS

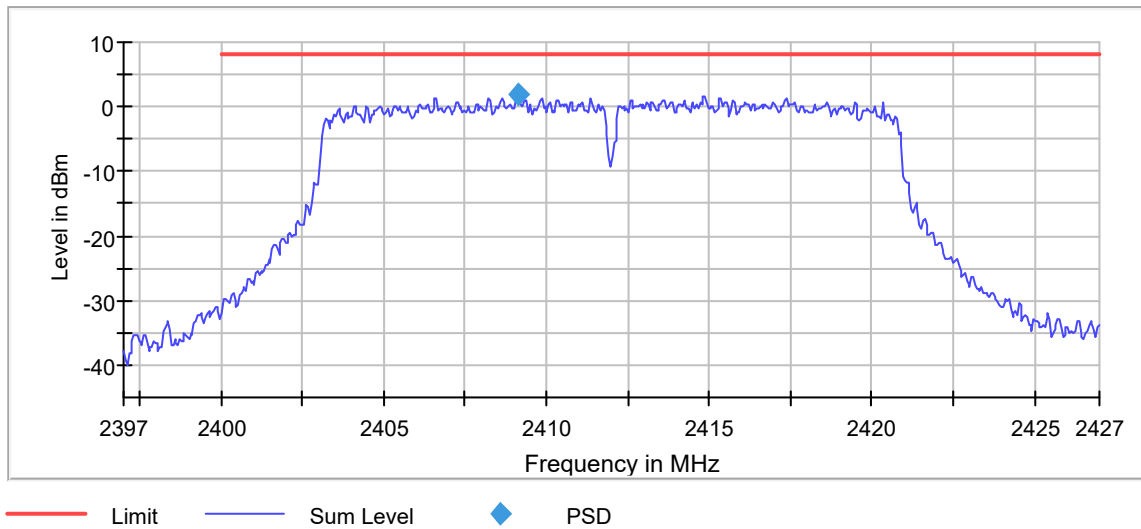

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.50 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	---	---	2403.150000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

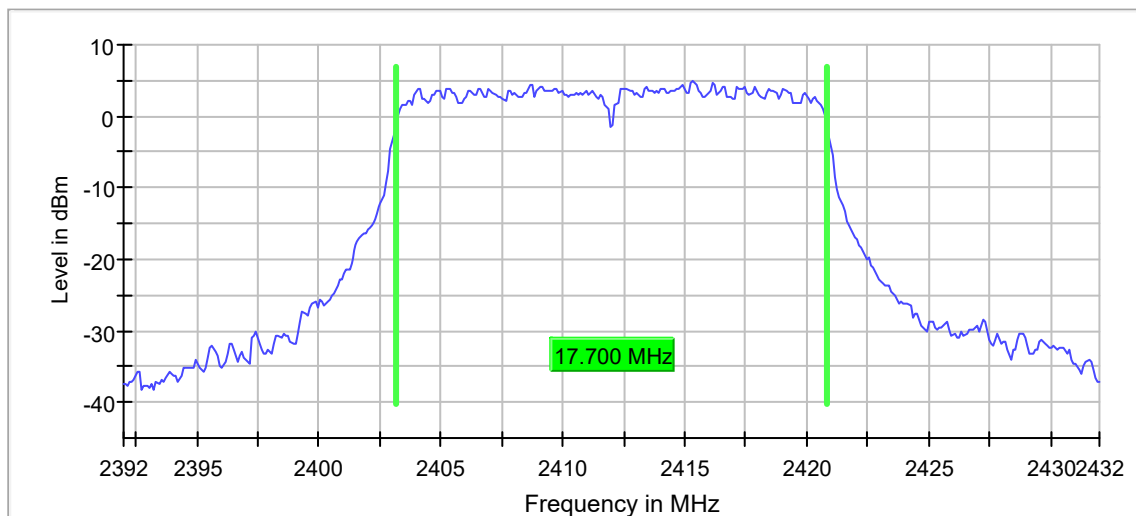

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	25 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2409.125000	2.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.825000	-29.7	12.5	-17.2	PASS
2399.875000	-29.7	12.6	-17.2	PASS
2399.325000	-30.1	12.9	-17.2	PASS
2399.375000	-30.2	13.0	-17.2	PASS
2399.925000	-30.4	13.2	-17.2	PASS
2399.625000	-30.6	13.5	-17.2	PASS
2399.775000	-30.9	13.7	-17.2	PASS
2399.575000	-31.2	14.0	-17.2	PASS
2399.275000	-31.3	14.1	-17.2	PASS
2399.675000	-31.3	14.2	-17.2	PASS
2399.425000	-31.4	14.2	-17.2	PASS
2399.225000	-31.5	14.3	-17.2	PASS
2399.725000	-31.6	14.4	-17.2	PASS
2399.475000	-32.0	14.9	-17.2	PASS
2399.175000	-32.3	15.1	-17.2	PASS

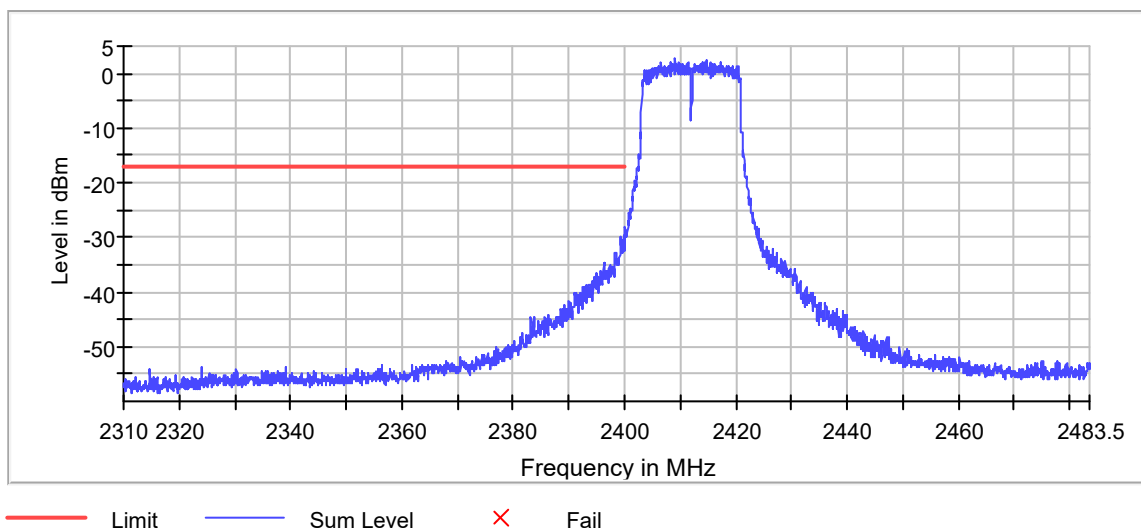

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.05 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.33 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	0.500000	---	2428.125000	2445.825000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	3.4	PASS

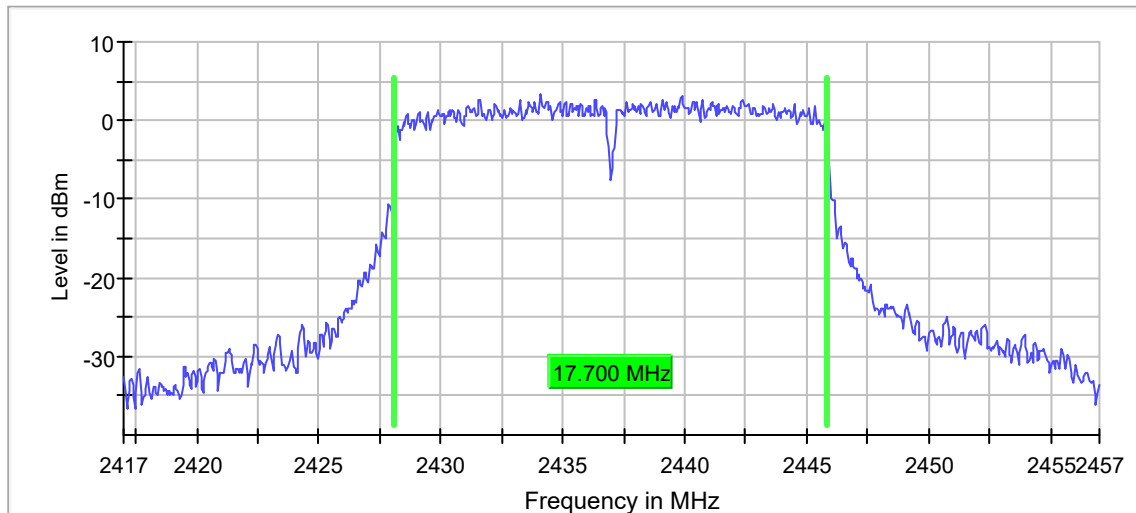

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.20 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.0	30.0	PASS

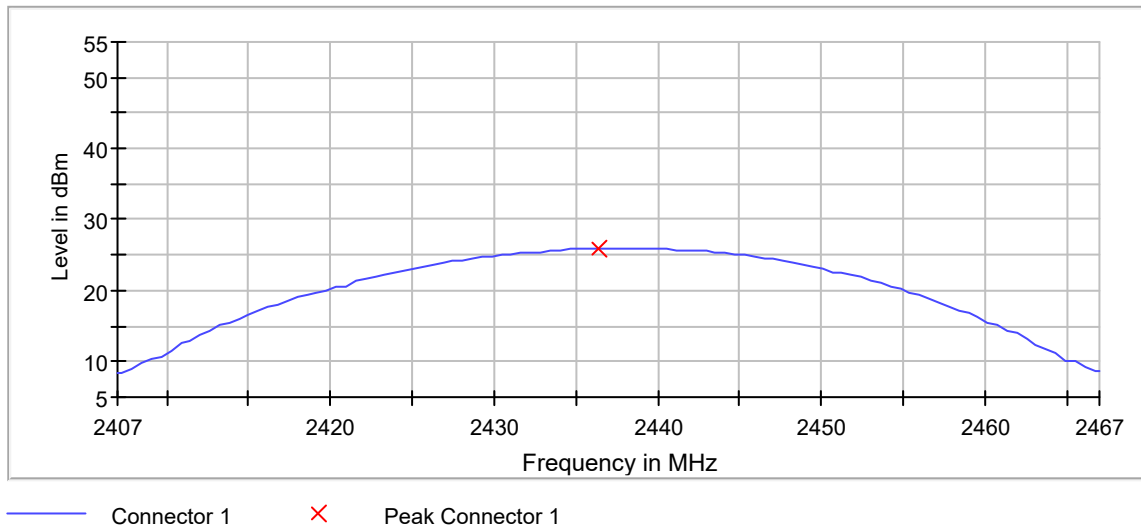

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 17.700 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweeptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.43 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2434.125000	3.220	8.0	PASS

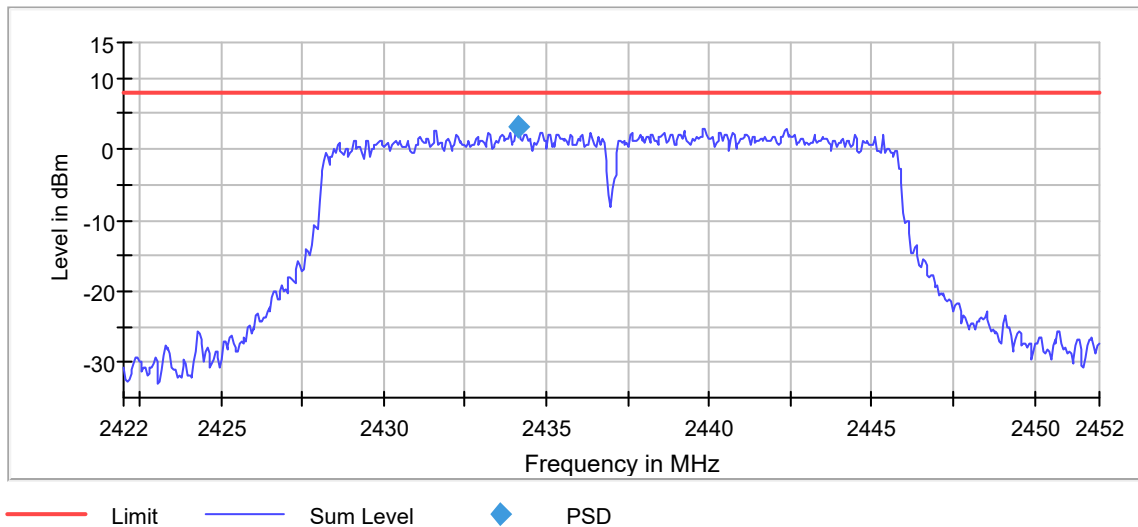

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.23 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	---	---	2428.150000	2445.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

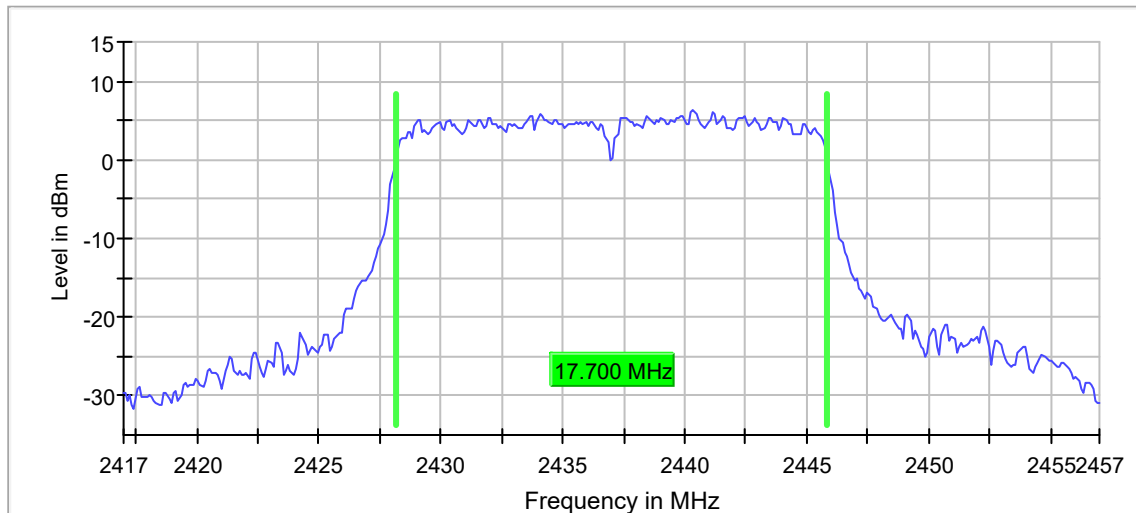

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	27 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	0.500000	---	2463.125000	2480.825000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-12.1	PASS

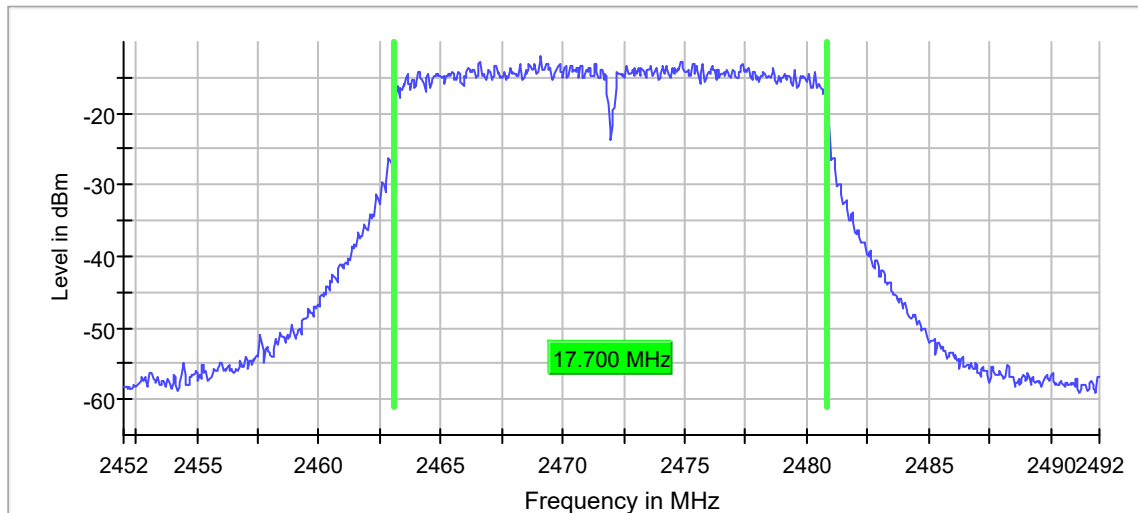

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.32 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	10.6	30.0	PASS

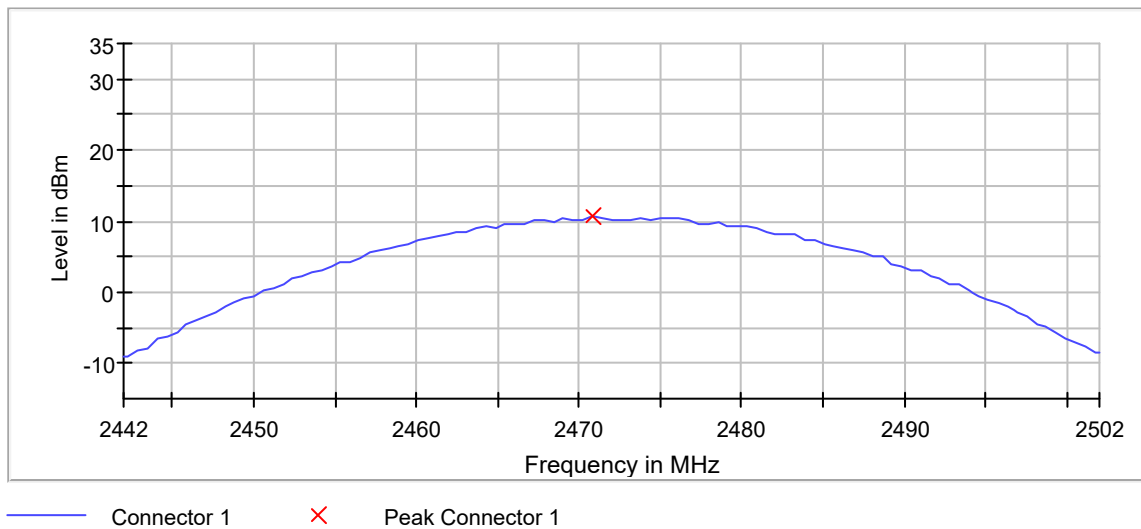

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.700 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2469.125000	-12.684	8.0	PASS

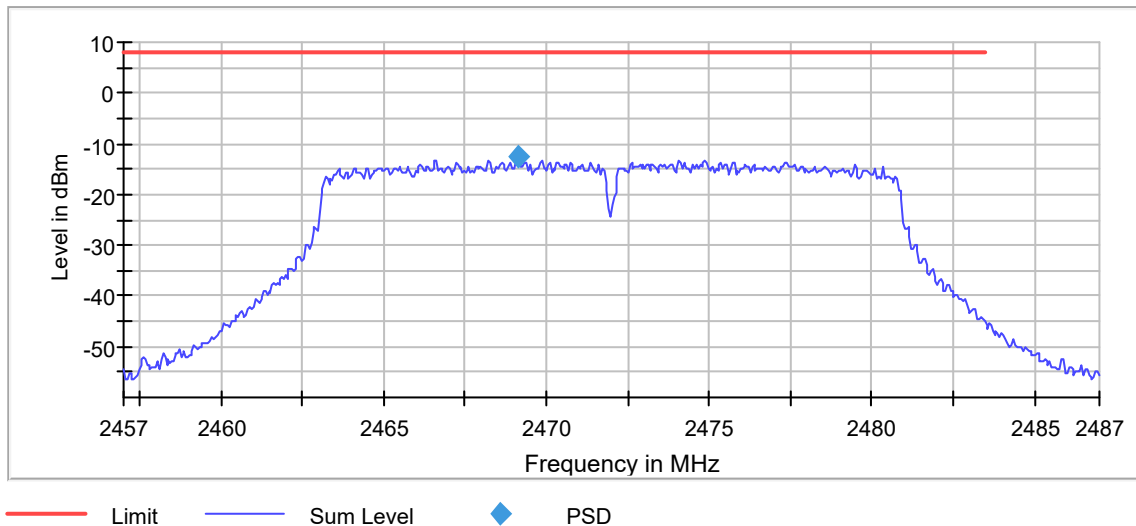

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.48 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	---	---	2463.150000	2480.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

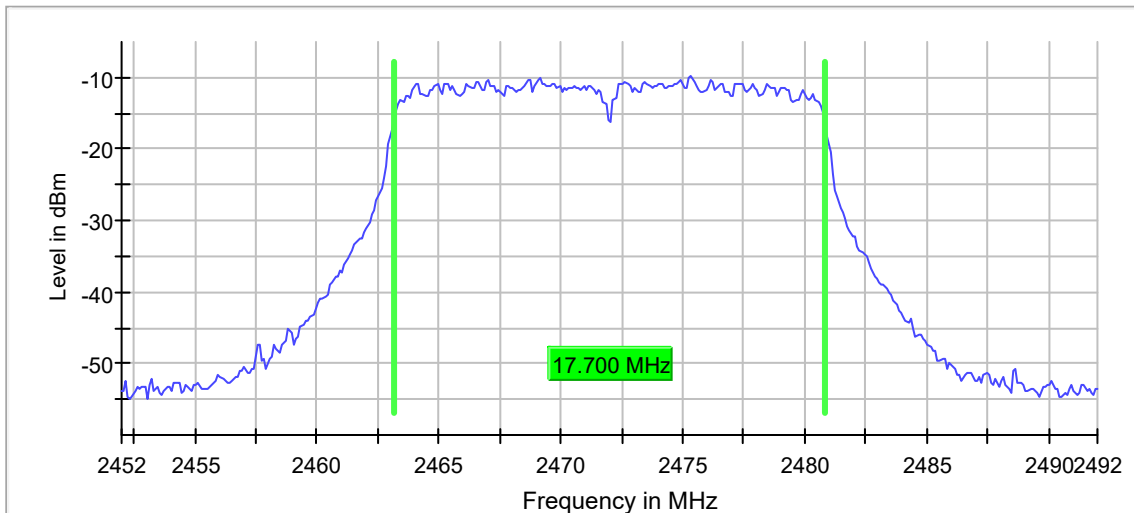

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	28 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.30 dB

802.11n, MCS1

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.800000	0.500000	---	2403.075000	2420.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	1.5	PASS

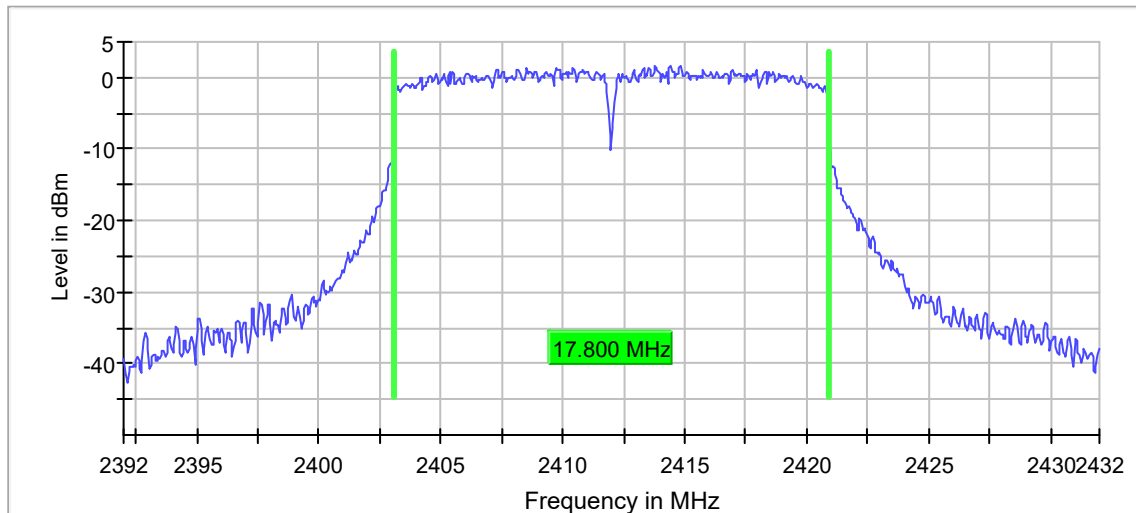

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	25 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.30 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	25.0	30.0	PASS

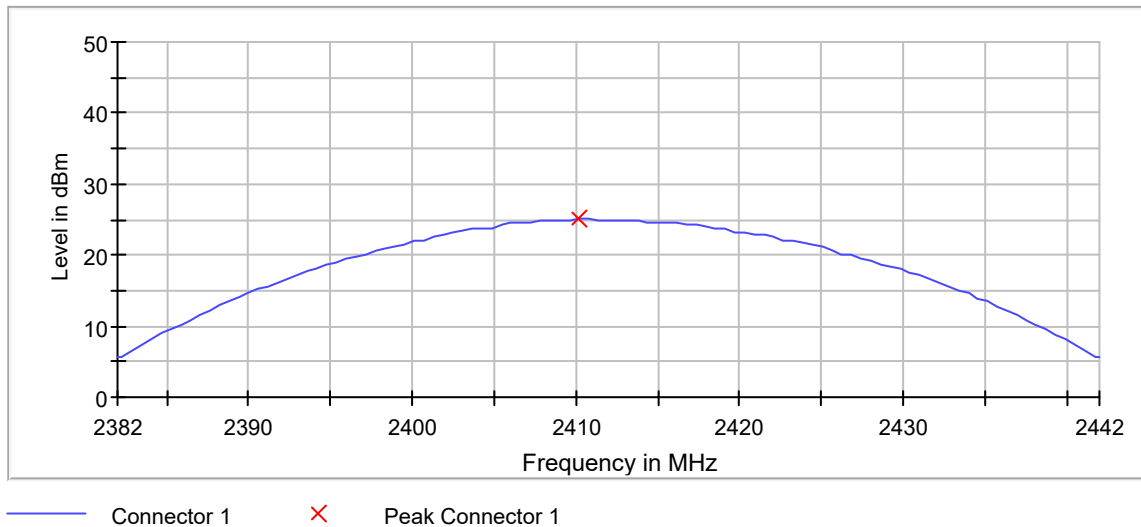

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2413.775000	1.445	8.0	PASS

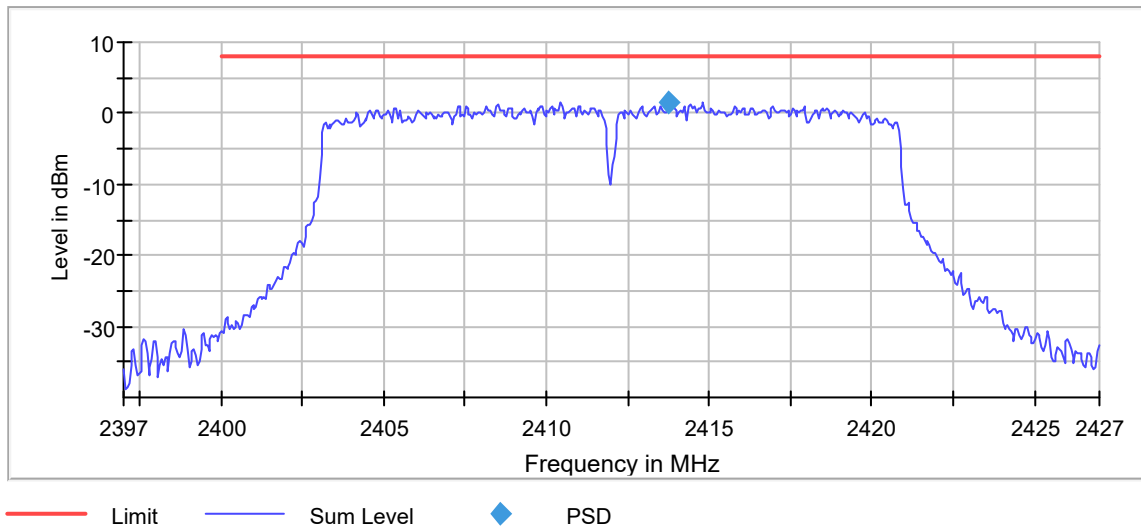

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.40 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	---	---	2403.150000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

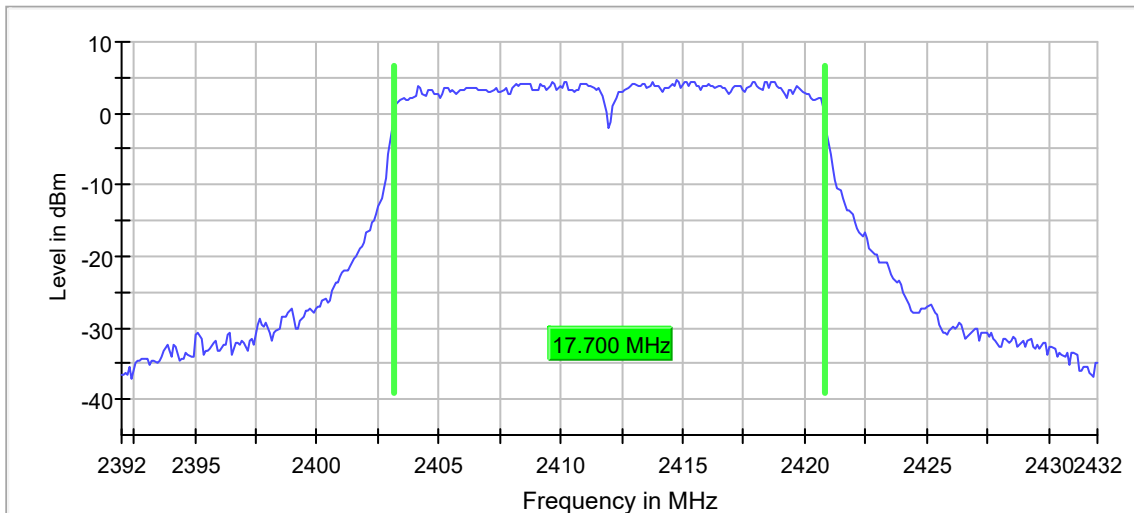

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2414.425000	2.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.875000	-29.3	11.7	-17.6	PASS
2399.975000	-29.7	12.1	-17.6	PASS
2399.775000	-29.7	12.1	-17.6	PASS
2399.725000	-29.8	12.1	-17.6	PASS
2398.825000	-29.9	12.2	-17.6	PASS
2398.925000	-30.1	12.5	-17.6	PASS
2399.825000	-30.2	12.5	-17.6	PASS
2399.925000	-30.6	12.9	-17.6	PASS
2399.425000	-30.7	13.0	-17.6	PASS
2397.925000	-30.8	13.2	-17.6	PASS
2399.875000	-30.8	13.2	-17.6	PASS
2399.475000	-30.9	13.3	-17.6	PASS
2397.975000	-30.9	13.3	-17.6	PASS
2397.625000	-30.9	13.3	-17.6	PASS
2397.575000	-31.0	13.4	-17.6	PASS

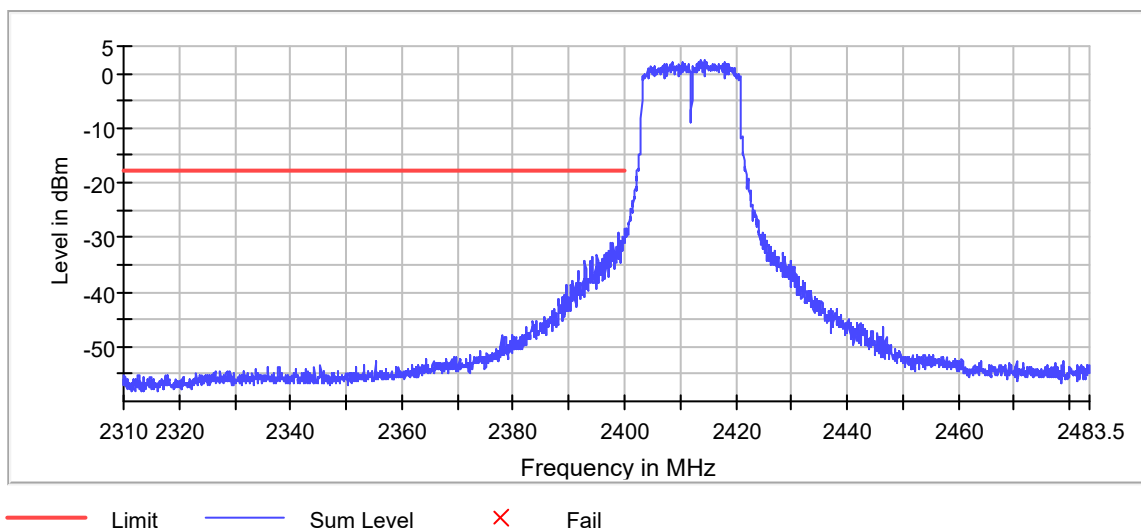

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.41 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.800000	0.500000	---	2428.075000	2445.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	2.8	PASS

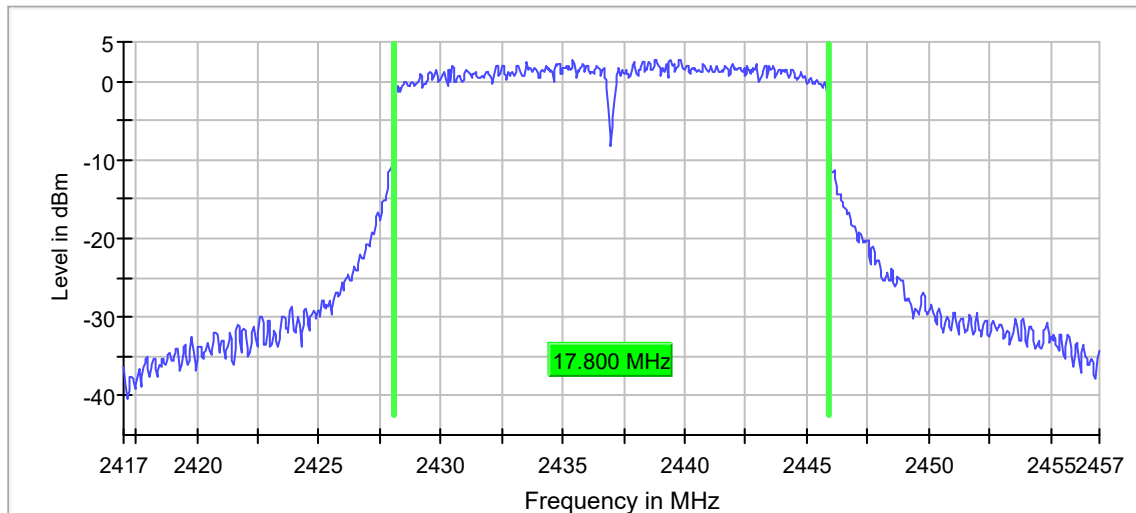

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.37 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.4	30.0	PASS

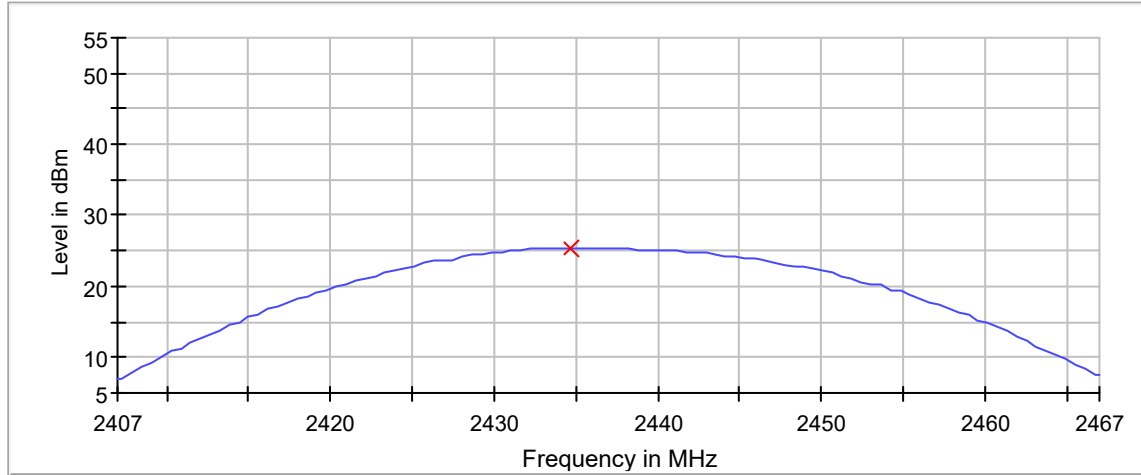

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 17.800 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2439.425000	2.758	8.0	PASS

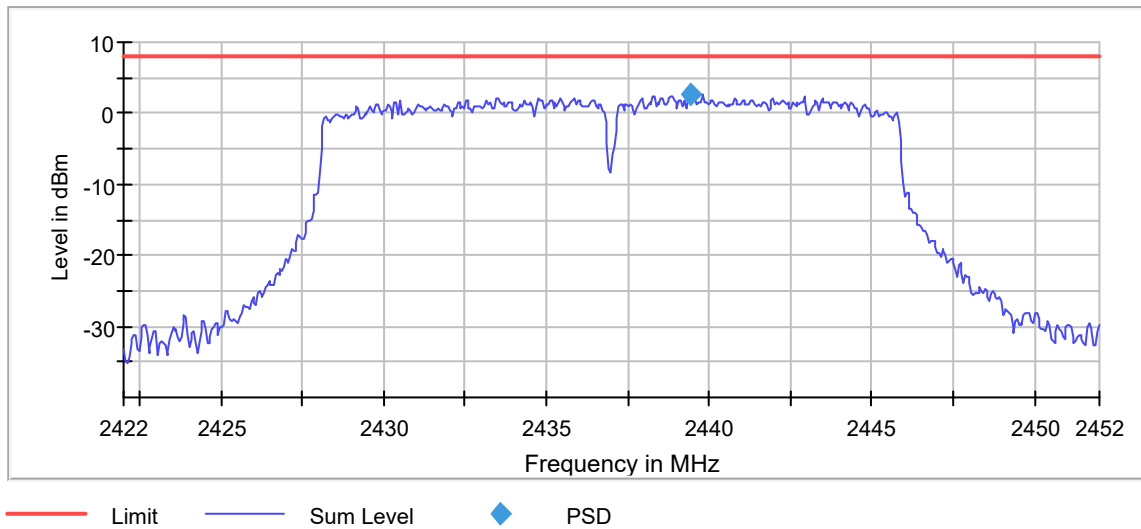

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.48 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	---	---	2428.150000	2445.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

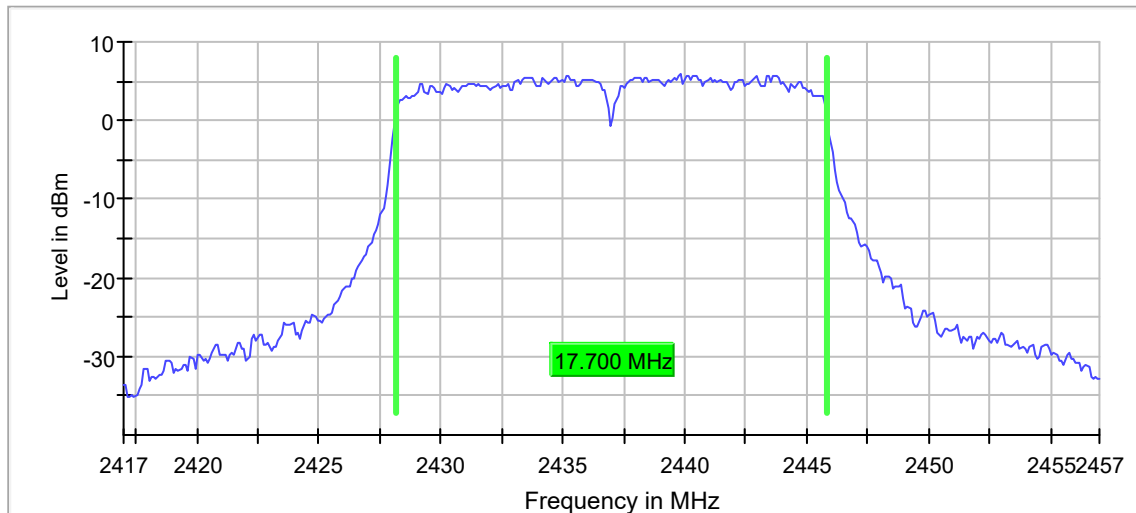

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	23 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.800000	0.500000	---	2463.075000	2480.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-12.8	PASS

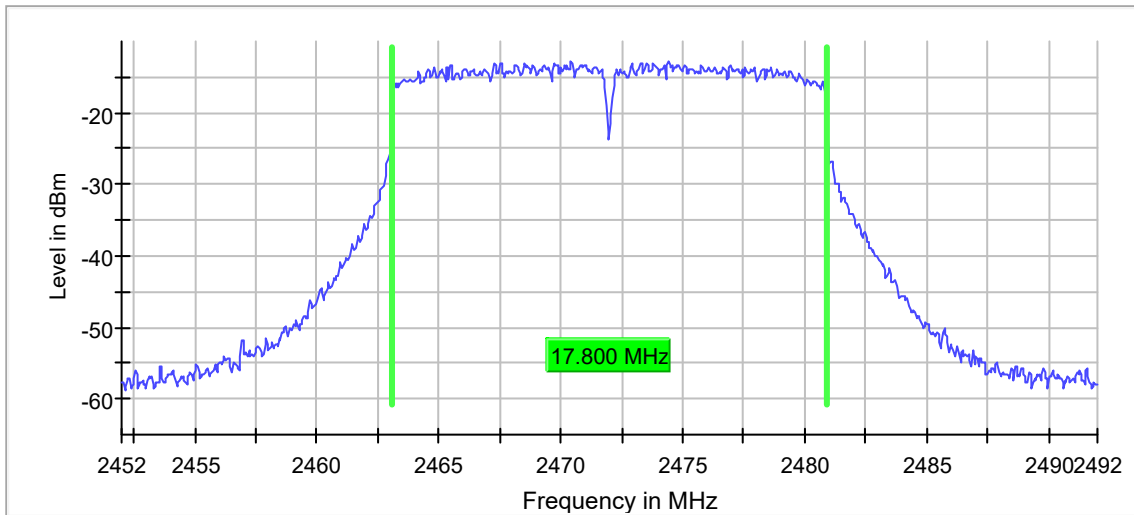

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	24 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.26 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	10.4	30.0	PASS

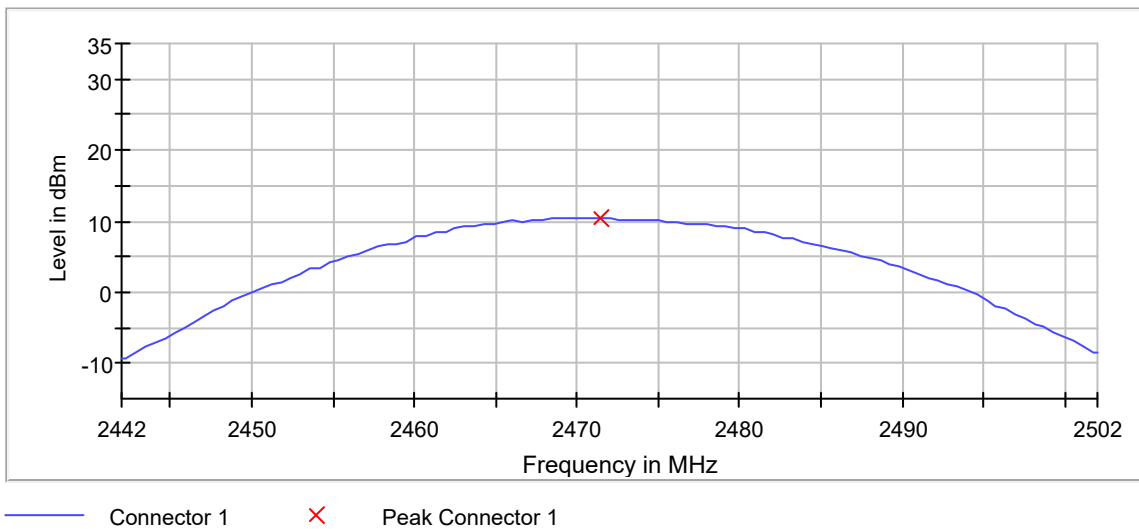

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.25 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2470.425000	-13.228	8.0	PASS

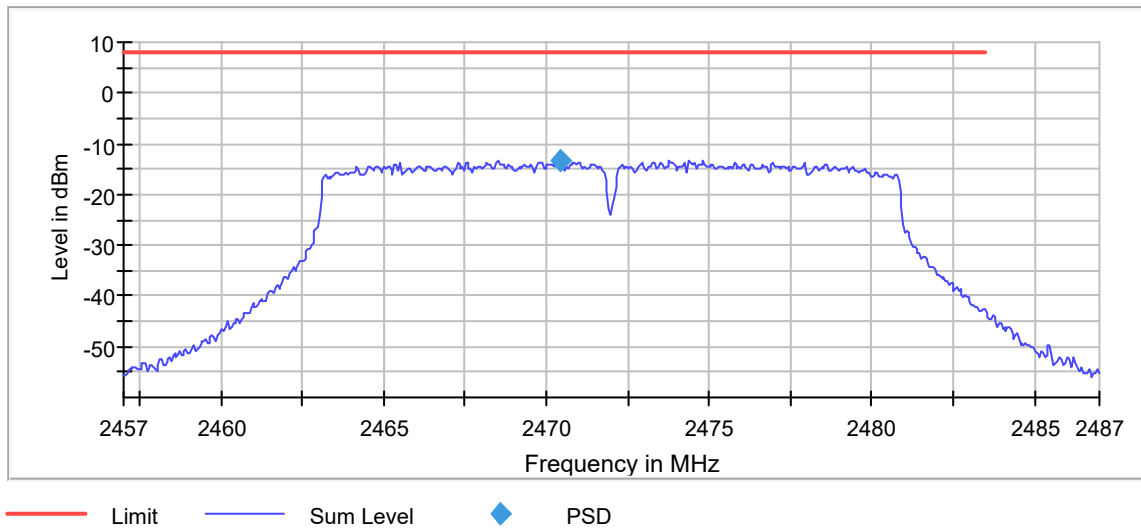

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.47 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	---	---	2463.150000	2480.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

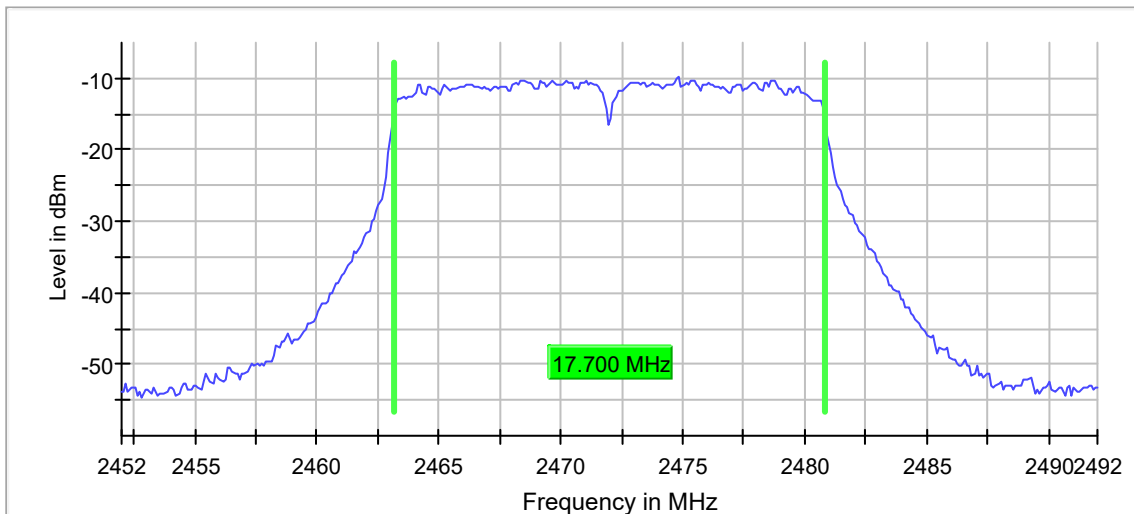

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweptime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	32 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.30 dB

802.11n, MCS2

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.800000	0.500000	---	2403.075000	2420.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.2	PASS

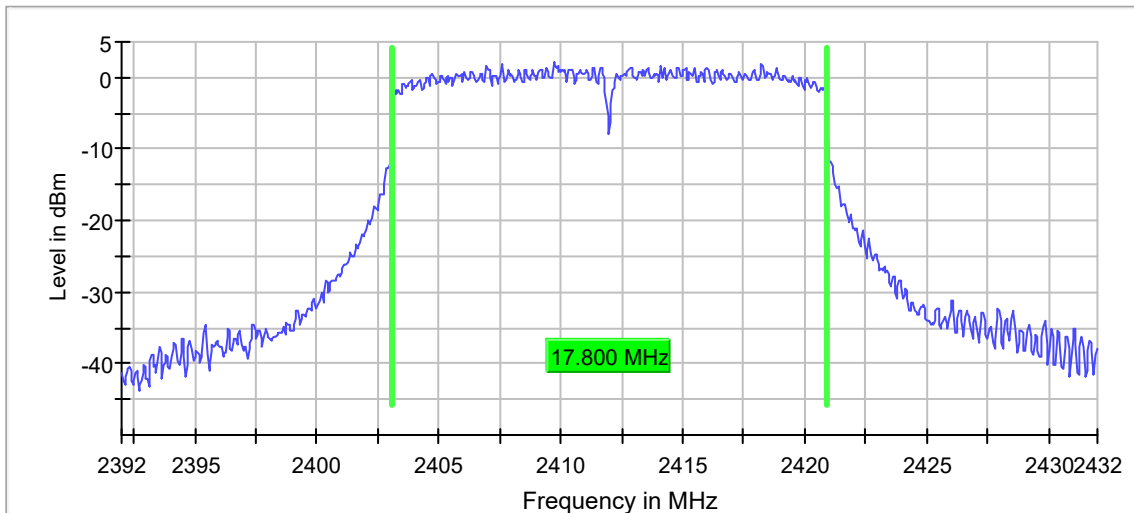

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	33 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.24 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.8	30.0	PASS

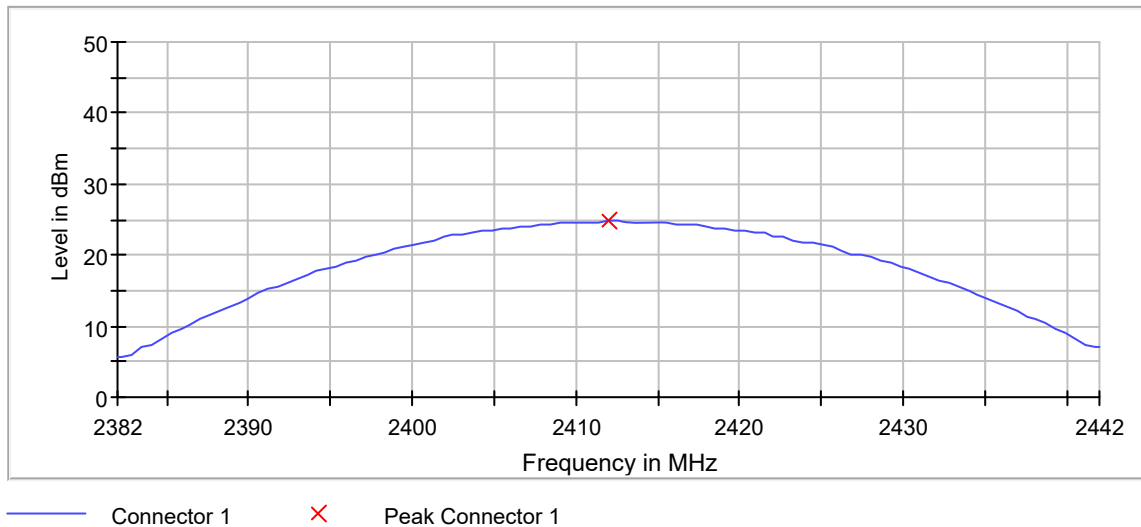

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.23 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2409.725000	2.100	8.0	PASS

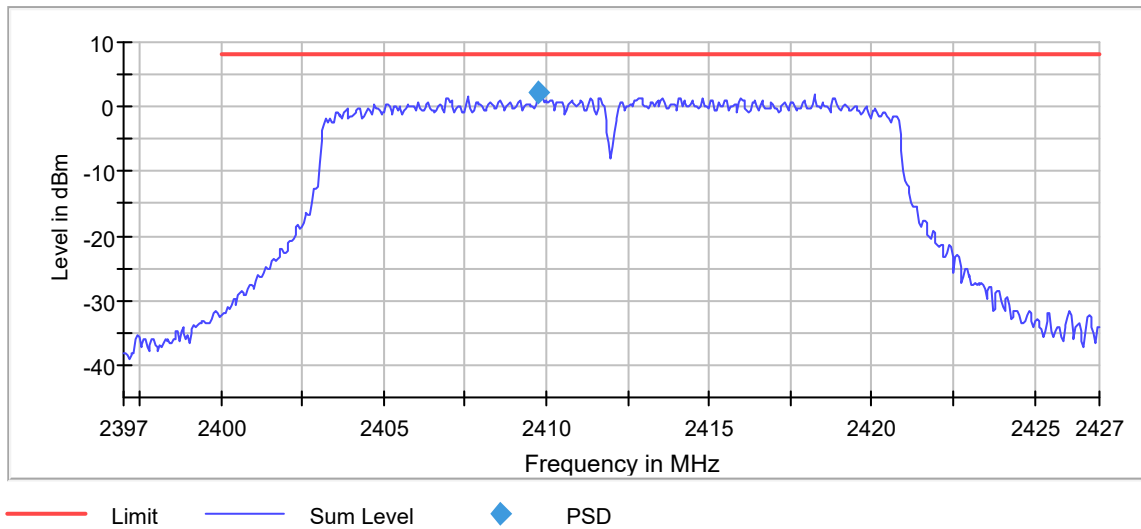

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.46 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	---	---	2403.150000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

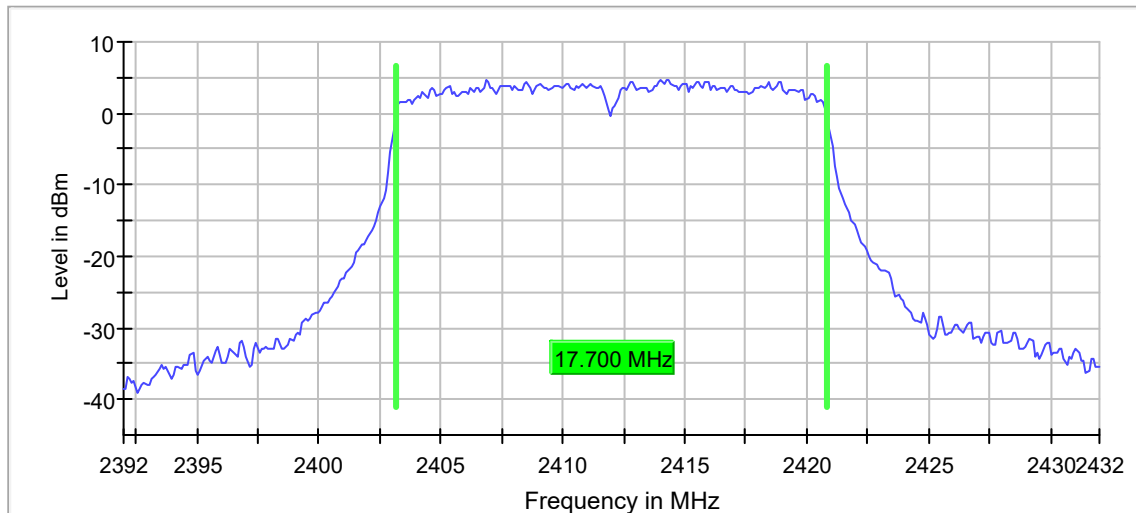

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	23 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.30 dB

and Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2409.725000	2.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.875000	-30.5	13.4	-17.1	PASS
2399.925000	-30.5	13.4	-17.1	PASS
2399.975000	-30.7	13.6	-17.1	PASS
2399.825000	-30.7	13.6	-17.1	PASS
2399.725000	-31.4	14.3	-17.1	PASS
2399.775000	-31.4	14.3	-17.1	PASS
2399.675000	-31.4	14.3	-17.1	PASS
2399.225000	-31.7	14.6	-17.1	PASS
2399.275000	-31.9	14.7	-17.1	PASS
2399.625000	-32.1	15.0	-17.1	PASS
2399.575000	-32.2	15.1	-17.1	PASS
2399.425000	-32.3	15.2	-17.1	PASS
2399.525000	-32.5	15.3	-17.1	PASS
2399.325000	-32.5	15.3	-17.1	PASS
2398.825000	-32.7	15.5	-17.1	PASS

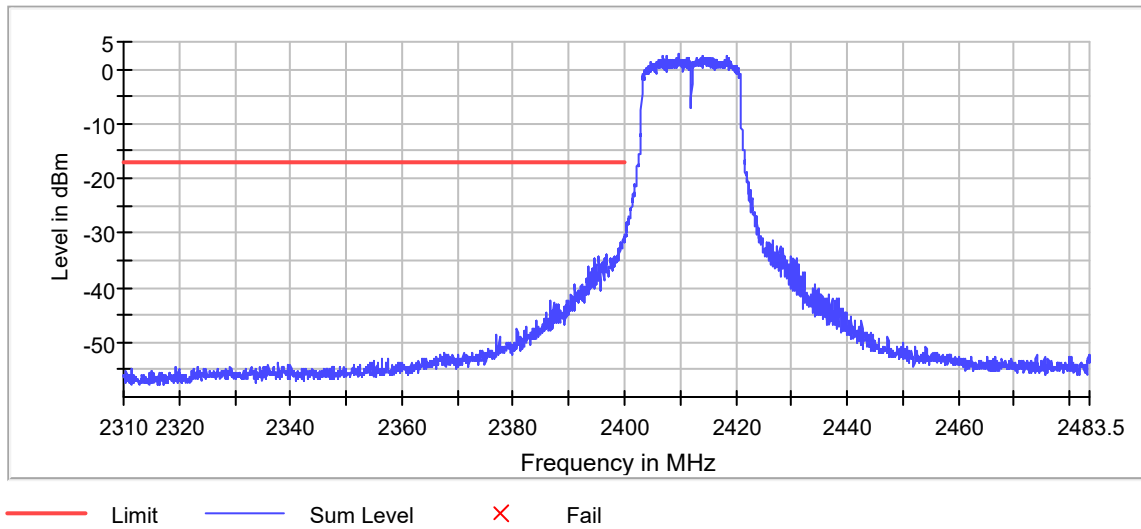

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	26 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.45 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.24 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.750000	0.500000	---	2428.125000	2445.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	2.9	PASS

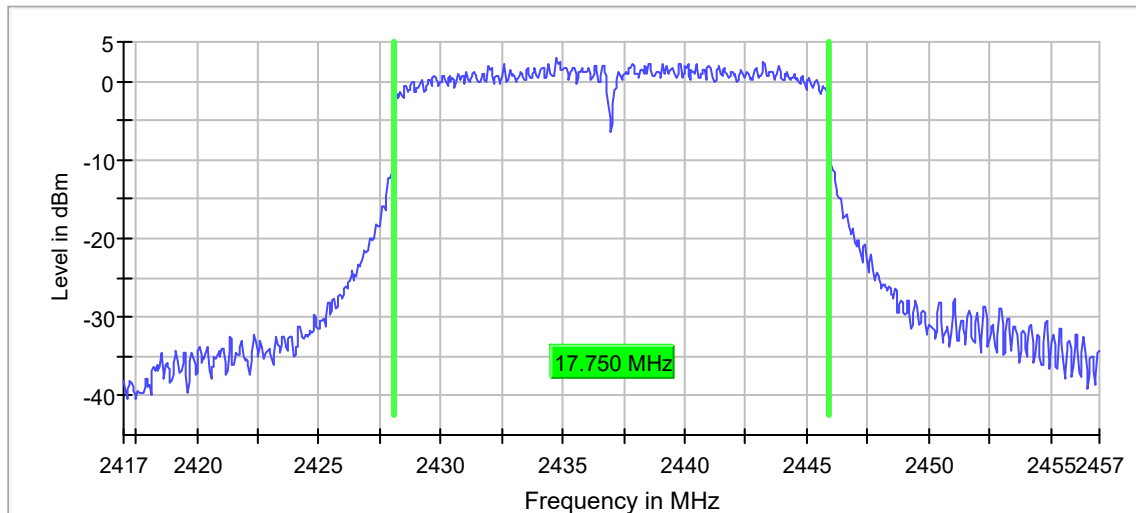

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.28 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.7	30.0	PASS

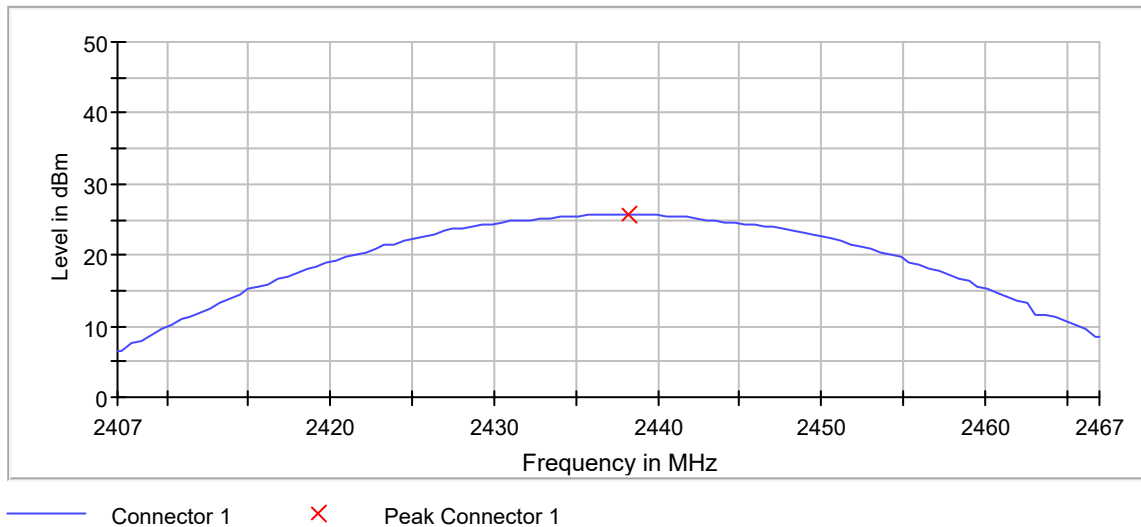

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.750 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2434.725000	2.778	8.0	PASS

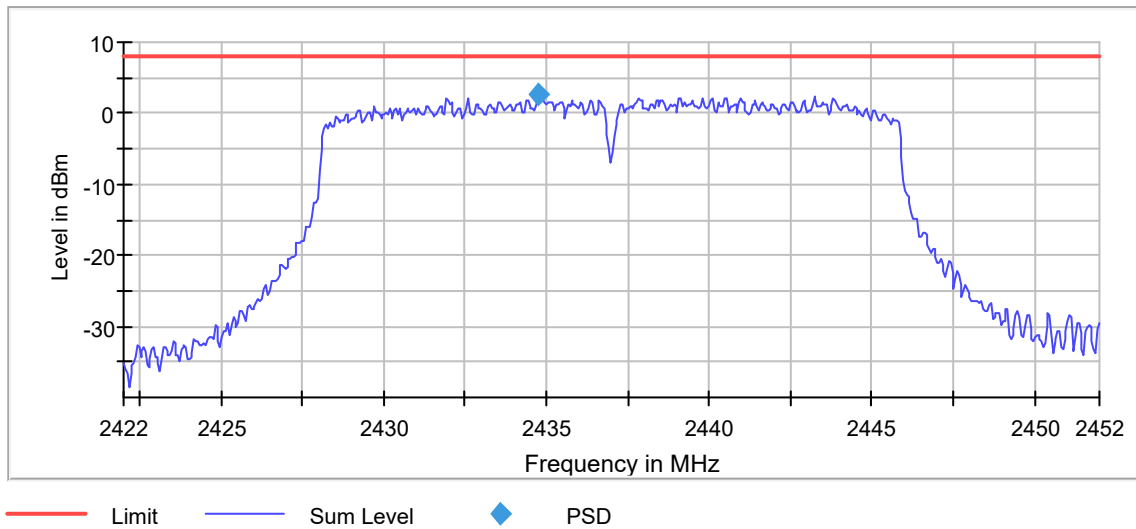

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.41 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	---	---	2428.150000	2445.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

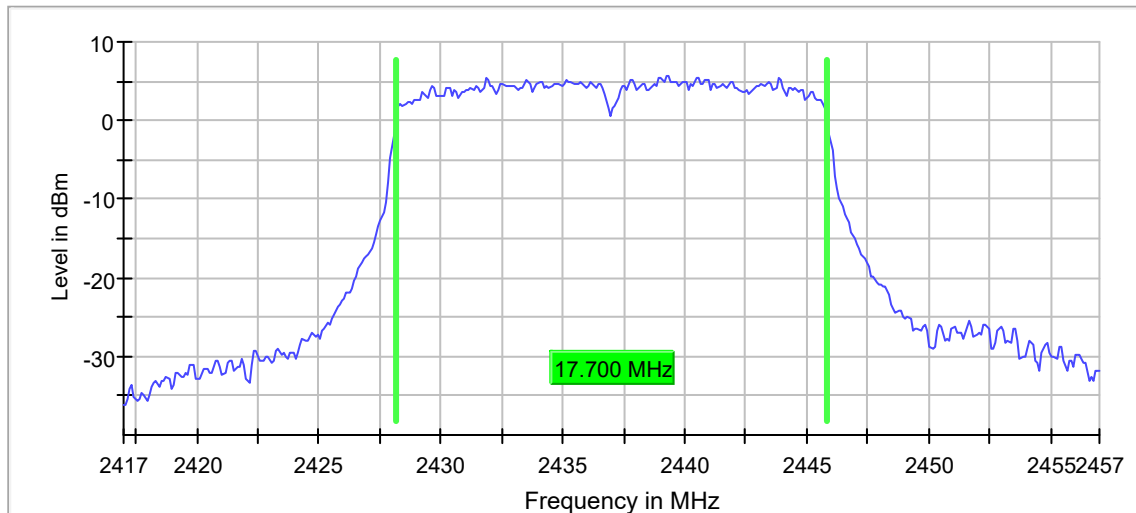

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	23 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.800000	0.500000	---	2463.075000	2480.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-12.0	PASS

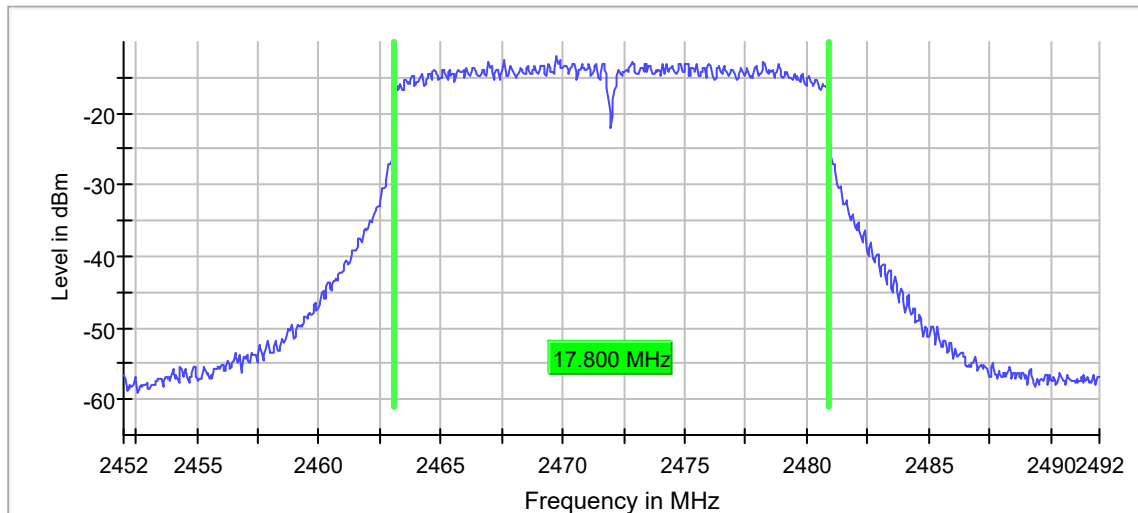

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	11.1	30.0	PASS

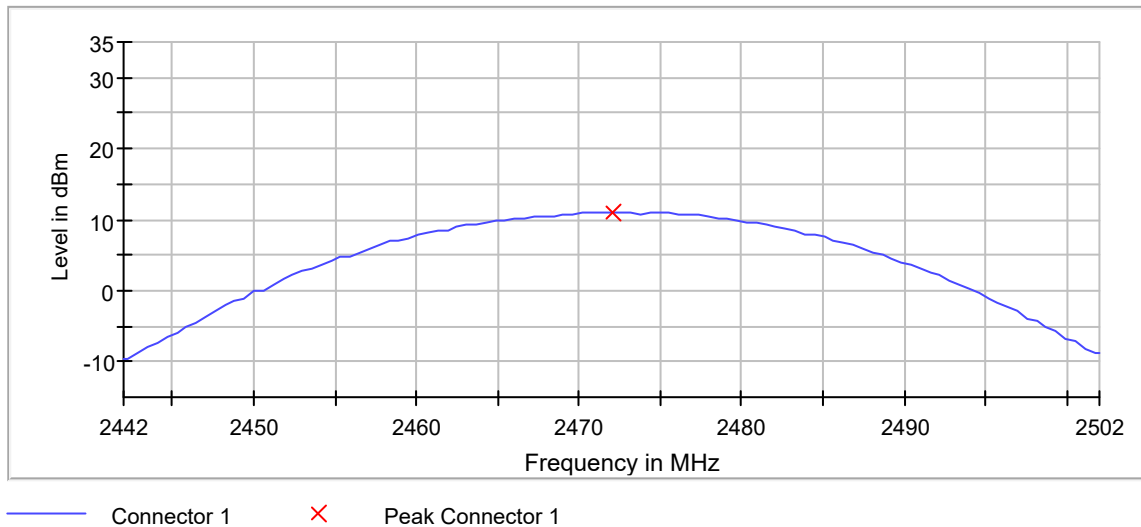

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2469.725000	-12.527	8.0	PASS

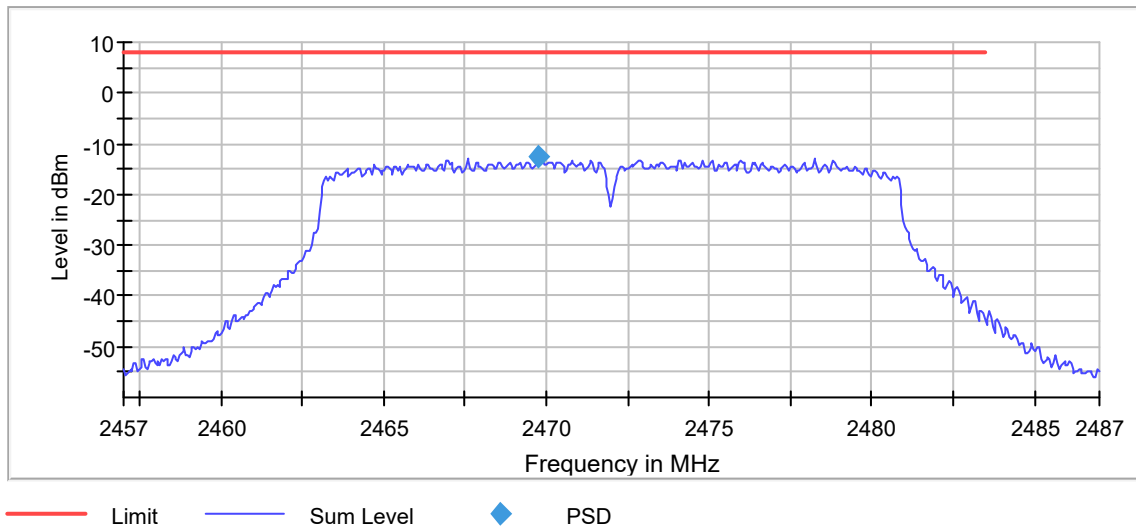

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.28 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	---	---	2463.150000	2480.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

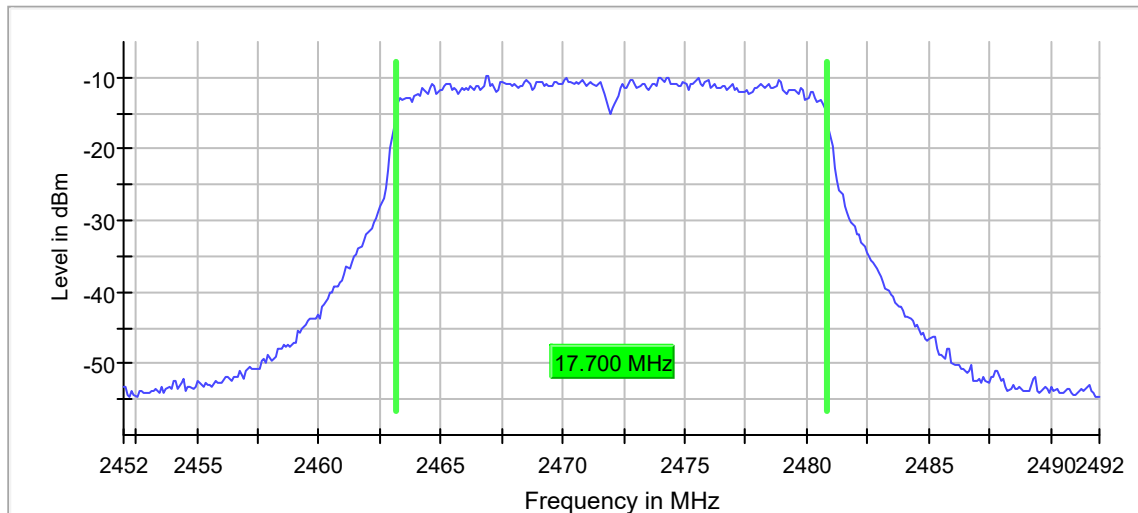

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	28 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB

802.11n, MCS3

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.800000	0.500000	---	2403.075000	2420.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.2	PASS

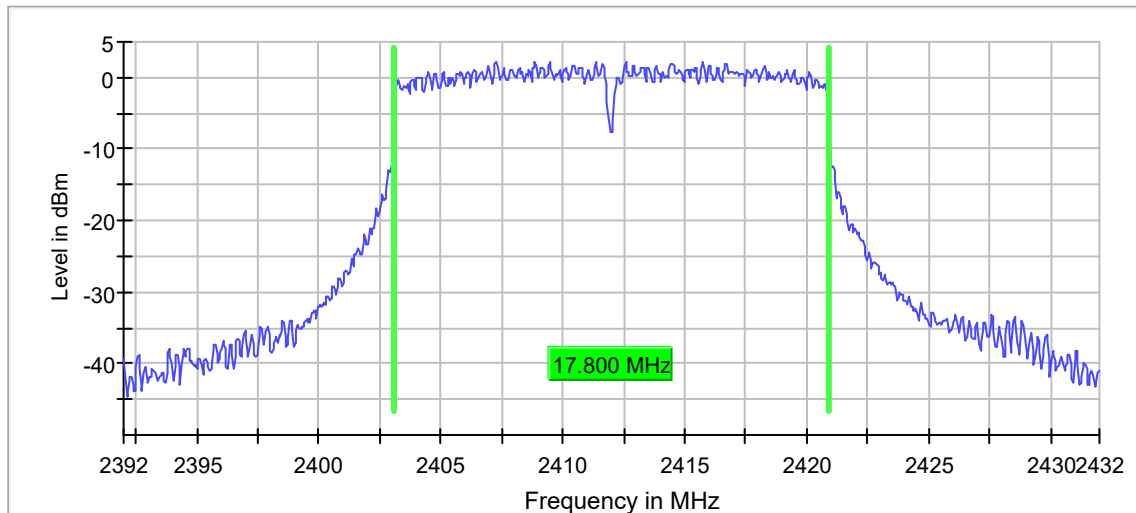

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.47 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.7	30.0	PASS

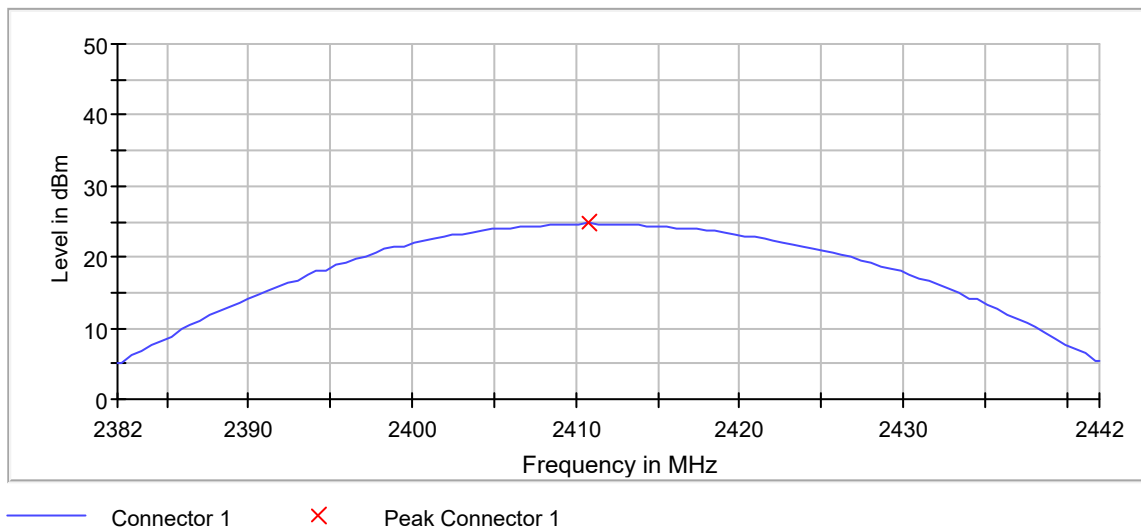

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 17.800 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2415.775000	2.145	8.0	PASS

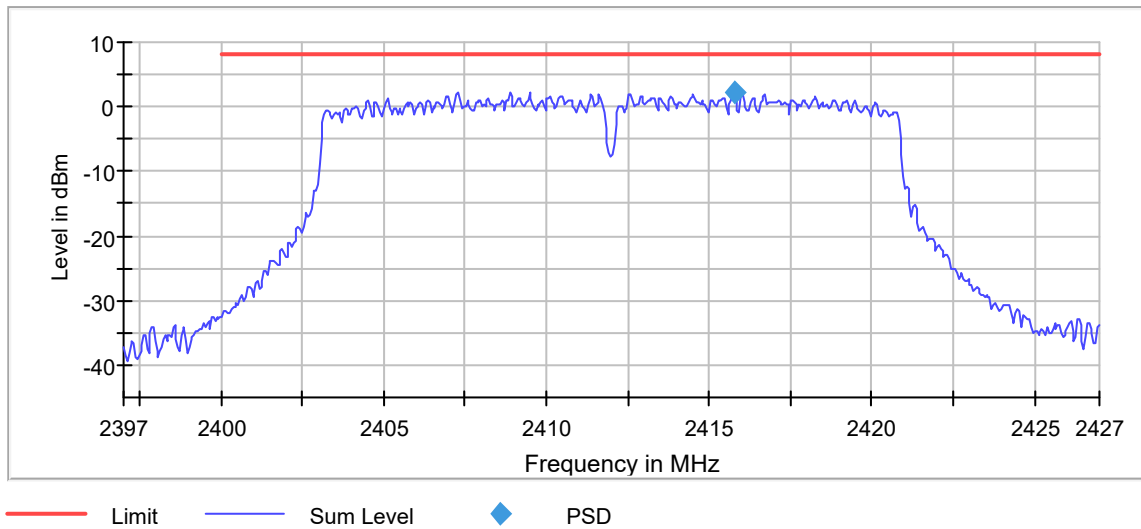

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.40 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	---	---	2403.150000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

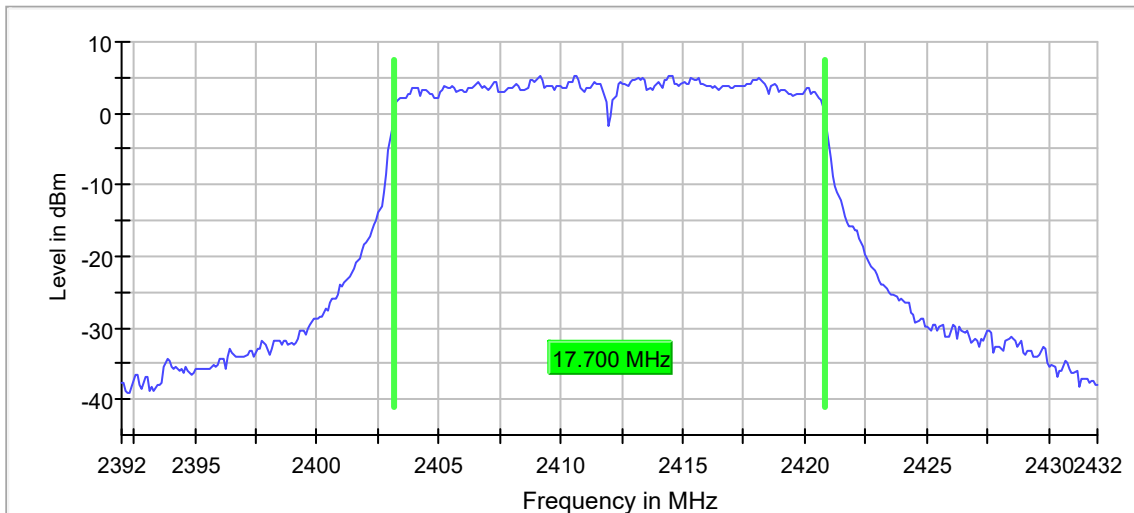

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	20 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2407.275000	3.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.725000	-31.0	14.1	-16.9	PASS
2399.775000	-31.3	14.4	-16.9	PASS
2399.875000	-31.3	14.4	-16.9	PASS
2399.975000	-31.5	14.6	-16.9	PASS
2399.825000	-31.7	14.8	-16.9	PASS
2399.625000	-32.0	15.1	-16.9	PASS
2398.525000	-32.1	15.2	-16.9	PASS
2399.675000	-32.4	15.5	-16.9	PASS
2399.925000	-32.7	15.8	-16.9	PASS
2398.825000	-32.7	15.8	-16.9	PASS
2399.575000	-32.8	15.8	-16.9	PASS
2399.525000	-32.8	15.9	-16.9	PASS
2398.875000	-32.9	16.0	-16.9	PASS
2399.475000	-32.9	16.0	-16.9	PASS
2398.475000	-33.0	16.1	-16.9	PASS

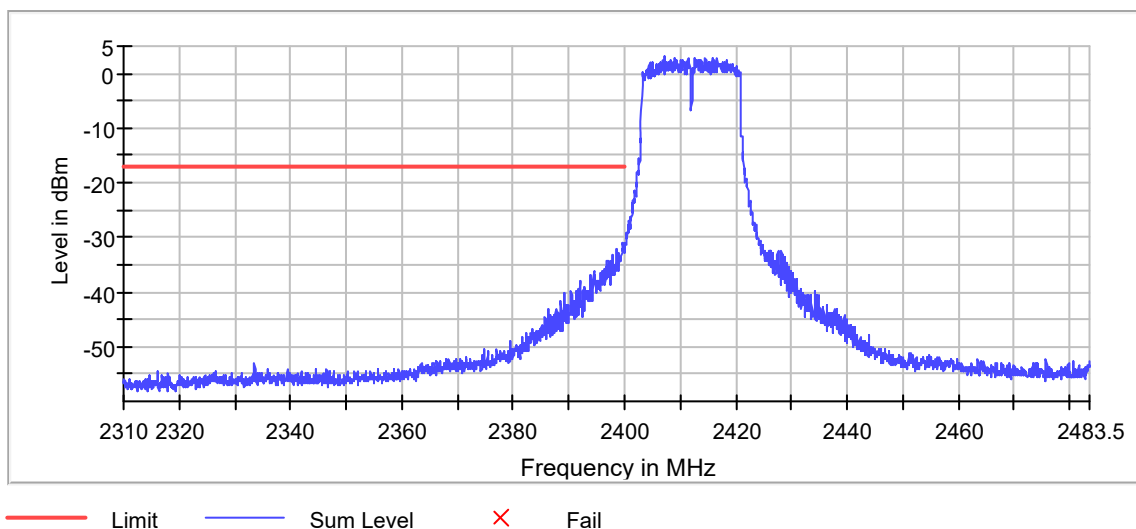

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.800000	0.500000	---	2428.075000	2445.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	2.4	PASS

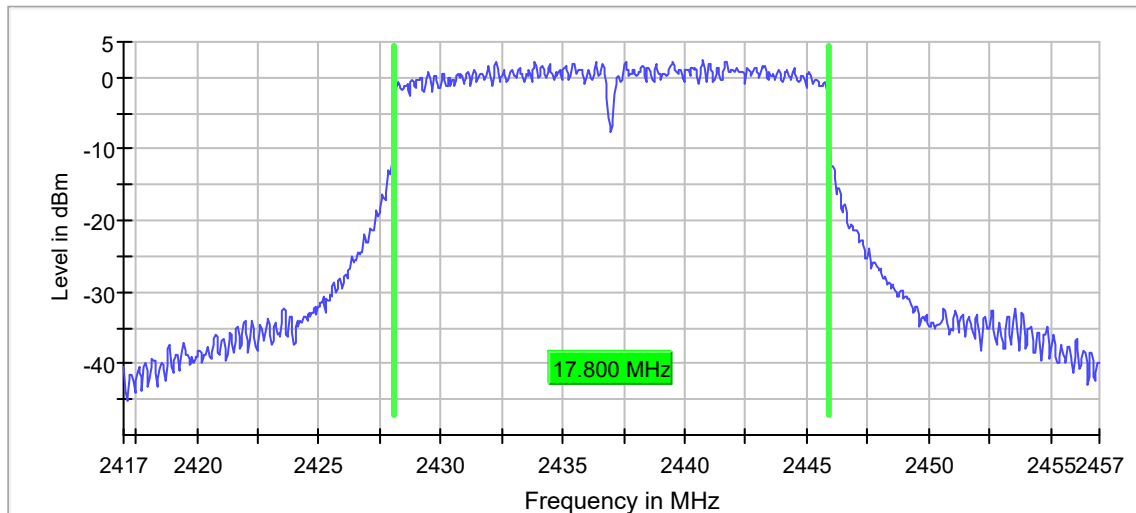

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.45 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	24.7	30.0	PASS

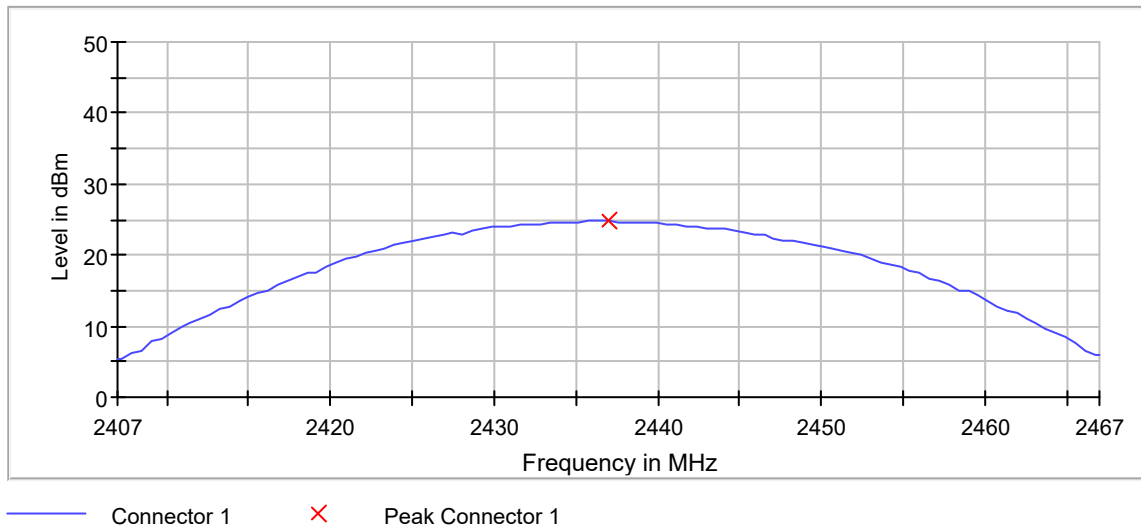

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.38 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2440.775000	2.368	8.0	PASS

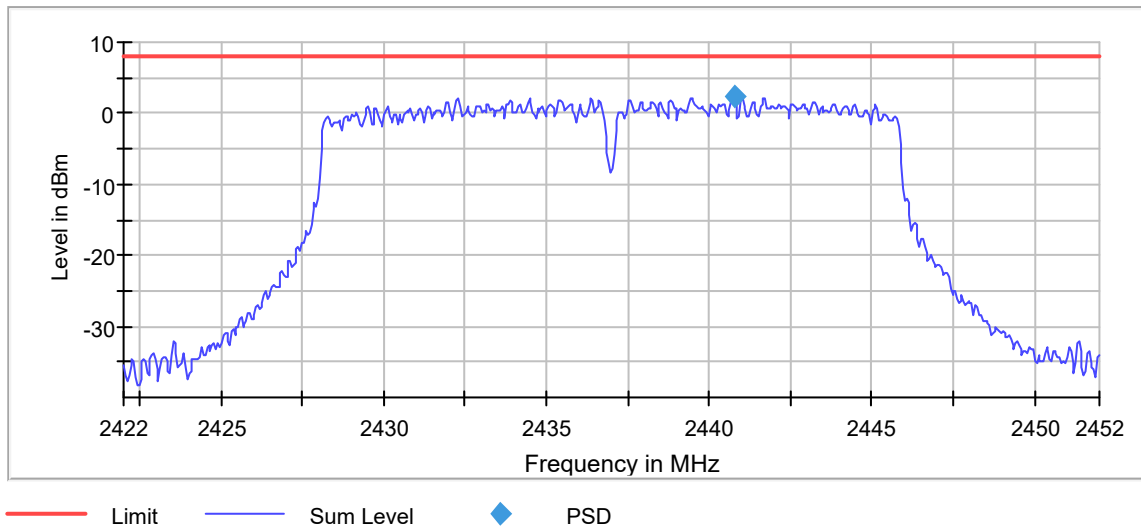

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.34 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	---	---	2428.150000	2445.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

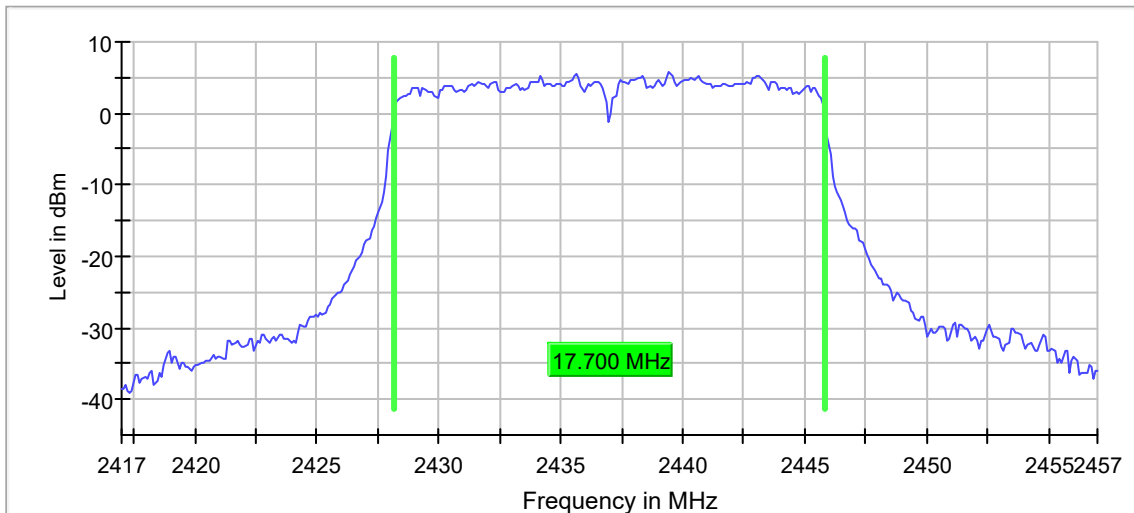

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	20 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.800000	0.500000	---	2463.075000	2480.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-11.9	PASS

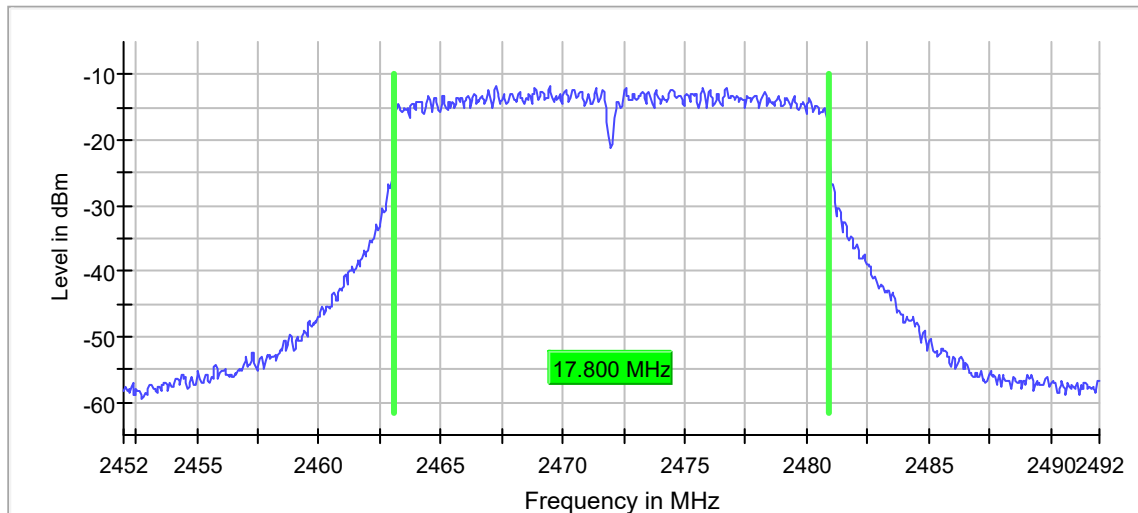

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.17 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	10.5	30.0	PASS

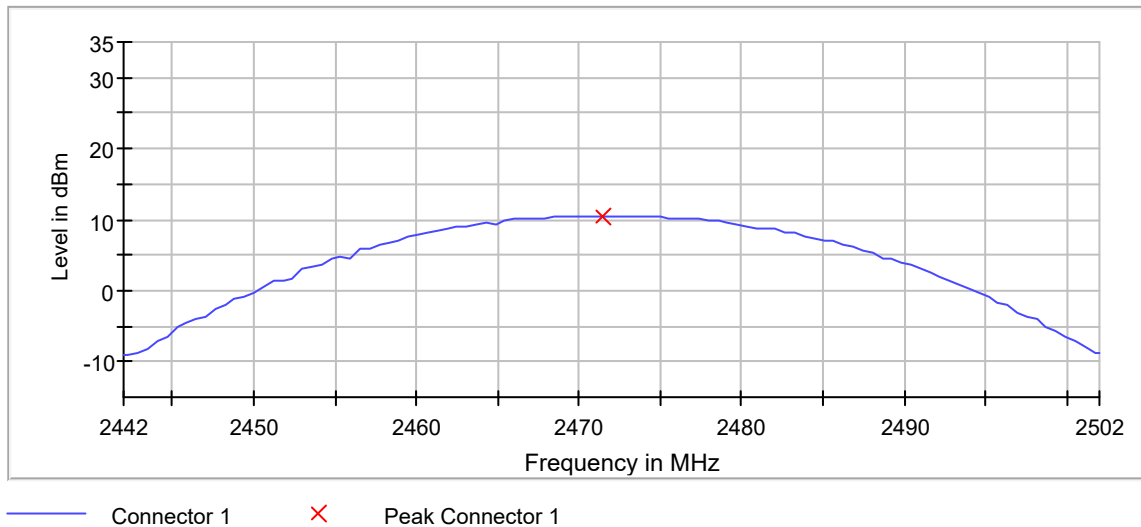

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 17.800 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2467.275000	-12.354	8.0	PASS

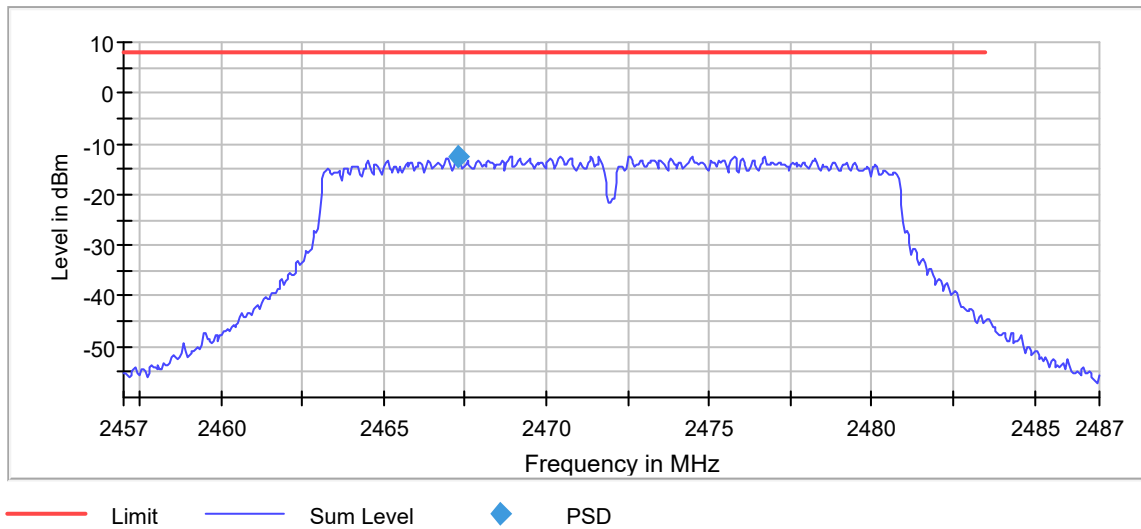

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.38 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	---	---	2463.150000	2480.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

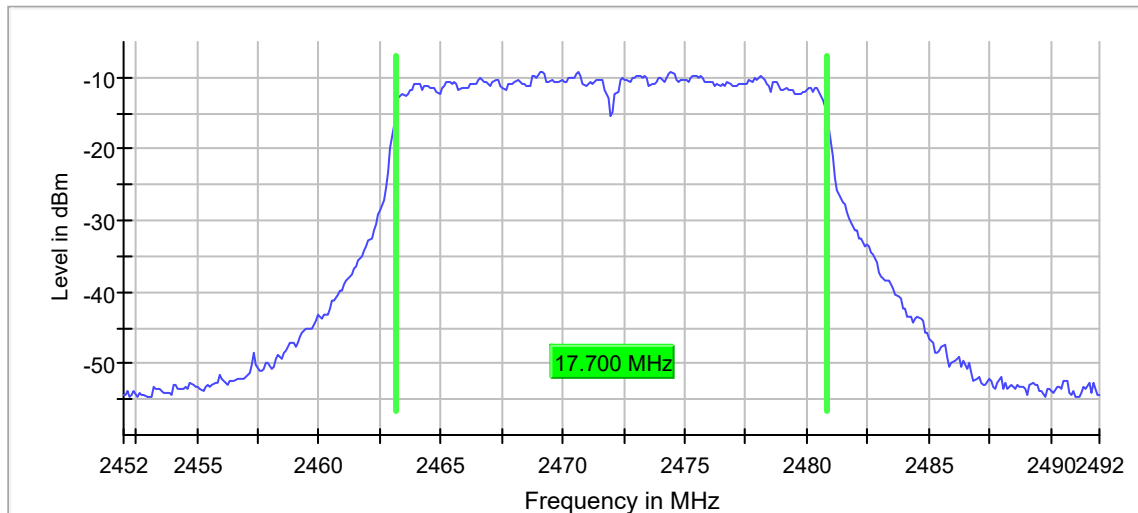

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	27 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB

802.11n, MCS4

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.800000	0.500000	---	2403.075000	2420.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	3.1	PASS

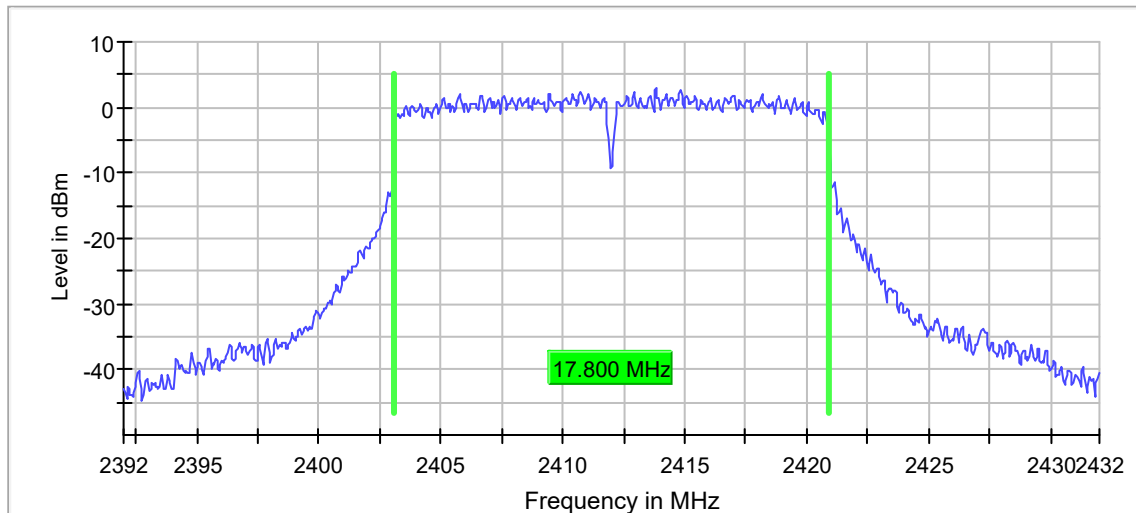

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.10 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.6	30.0	PASS

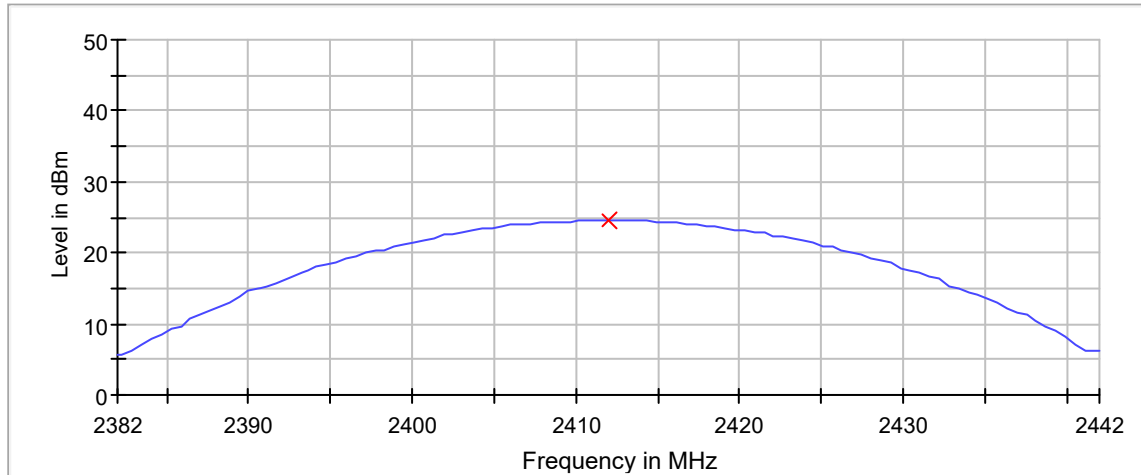

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2413.825000	2.859	8.0	PASS

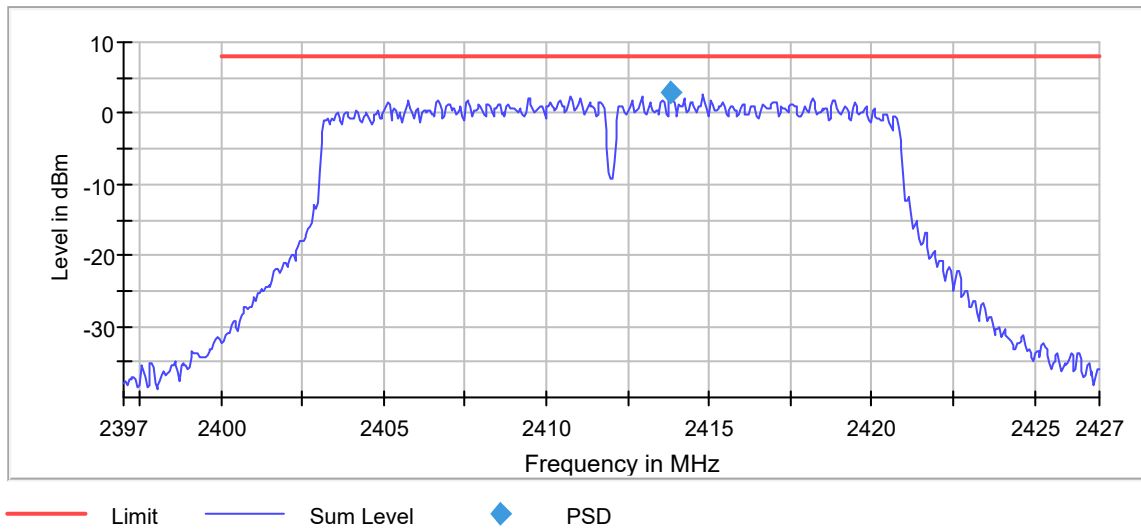

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.24 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	---	---	2403.150000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

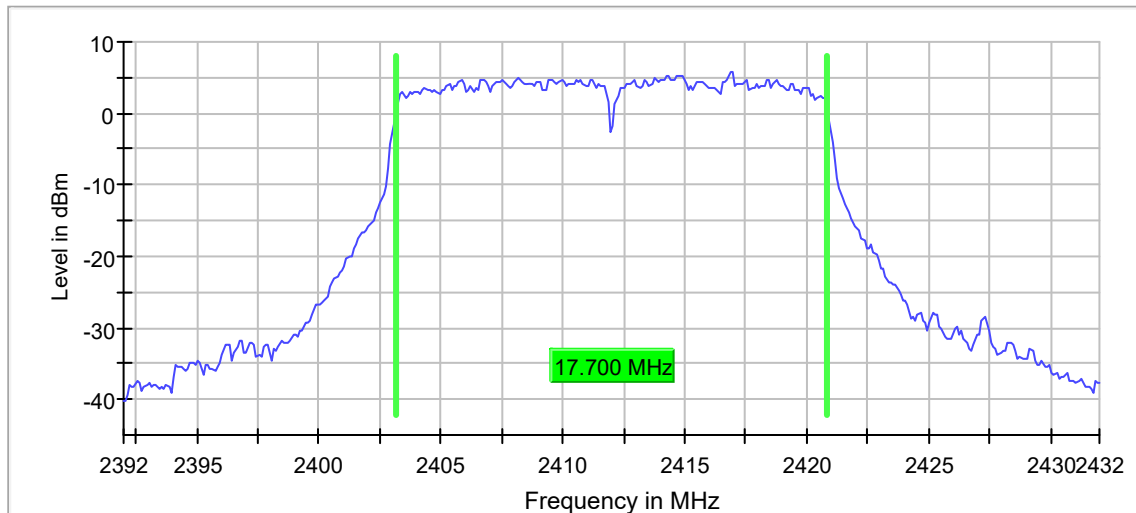

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	20 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2413.825000	4.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-30.0	14.0	-16.0	PASS
2399.825000	-30.5	14.5	-16.0	PASS
2399.875000	-30.5	14.5	-16.0	PASS
2399.925000	-30.8	14.7	-16.0	PASS
2399.775000	-31.5	15.5	-16.0	PASS
2399.625000	-32.2	16.2	-16.0	PASS
2399.675000	-32.2	16.2	-16.0	PASS
2399.575000	-32.4	16.4	-16.0	PASS
2399.475000	-32.7	16.7	-16.0	PASS
2399.725000	-32.7	16.7	-16.0	PASS
2399.525000	-32.8	16.8	-16.0	PASS
2399.125000	-32.8	16.8	-16.0	PASS
2399.225000	-32.9	16.9	-16.0	PASS
2399.425000	-32.9	16.9	-16.0	PASS
2399.075000	-33.0	16.9	-16.0	PASS

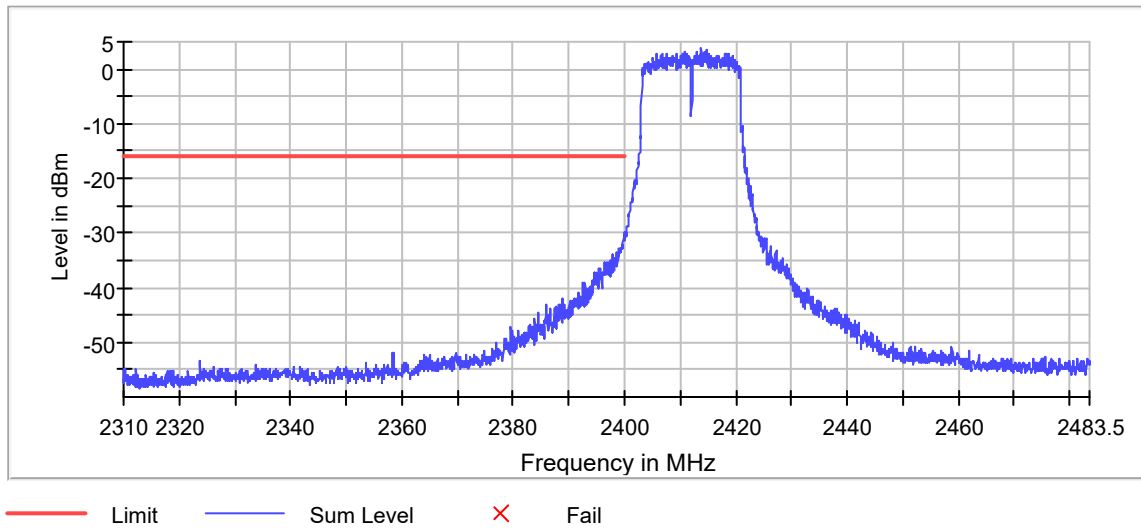

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.46 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.750000	0.500000	---	2428.125000	2445.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	3.1	PASS

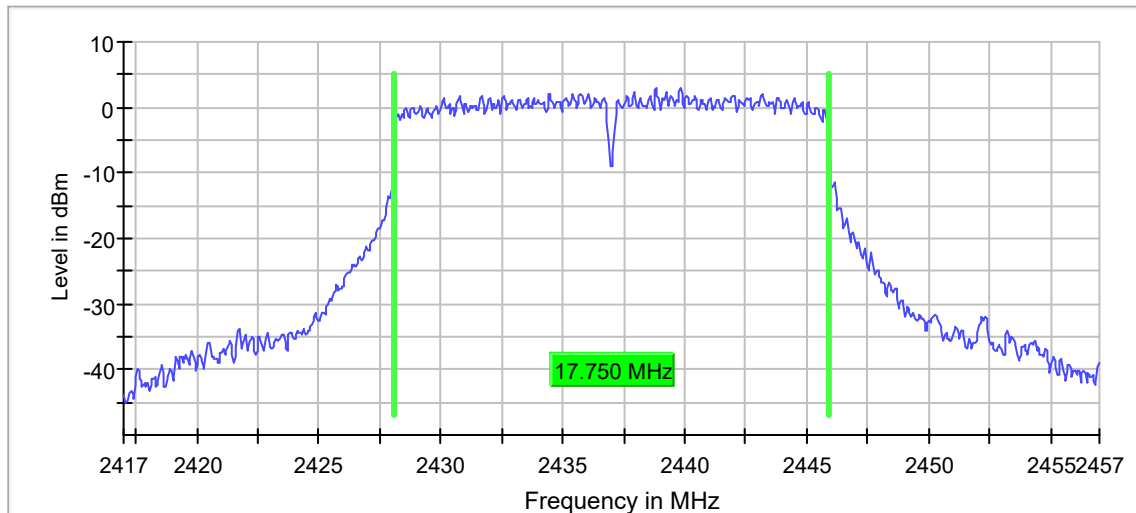

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.49 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	24.9	30.0	PASS

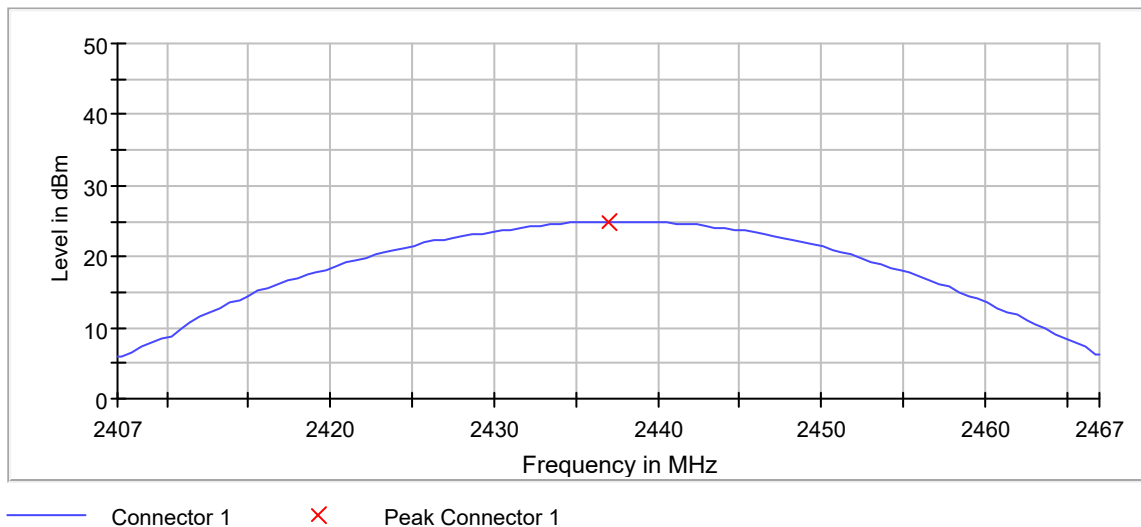

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.750 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2438.825000	3.113	8.0	PASS

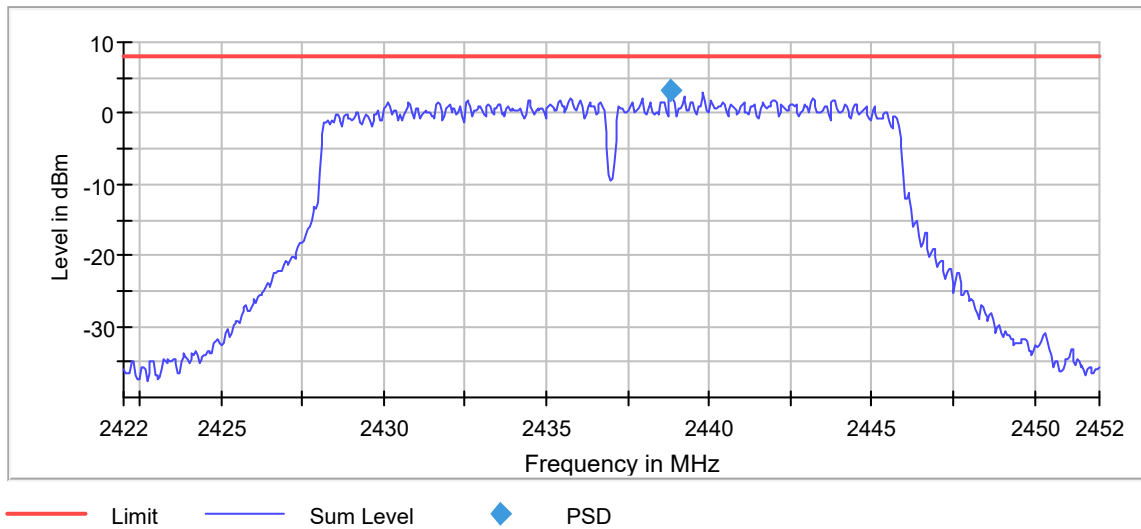

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.38 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	---	---	2428.150000	2445.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

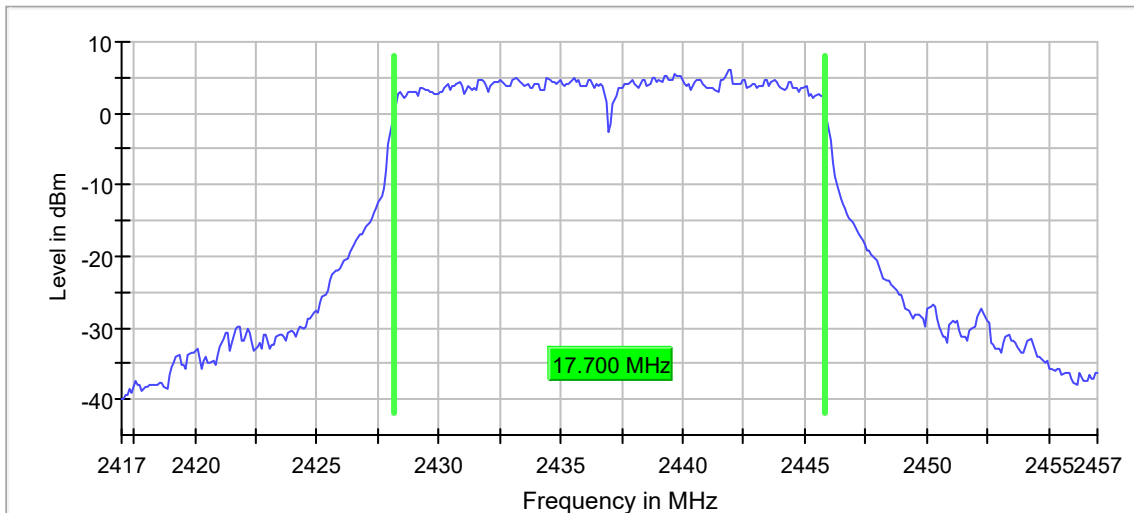

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	20 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.750000	0.500000	---	2463.125000	2480.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-11.1	PASS

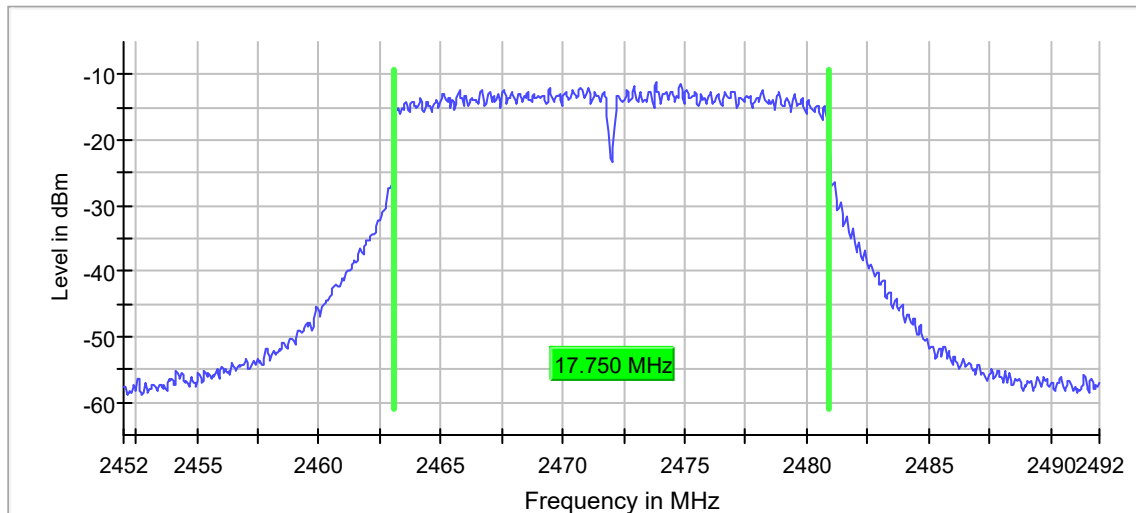

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	22 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.18 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	10.4	30.0	PASS

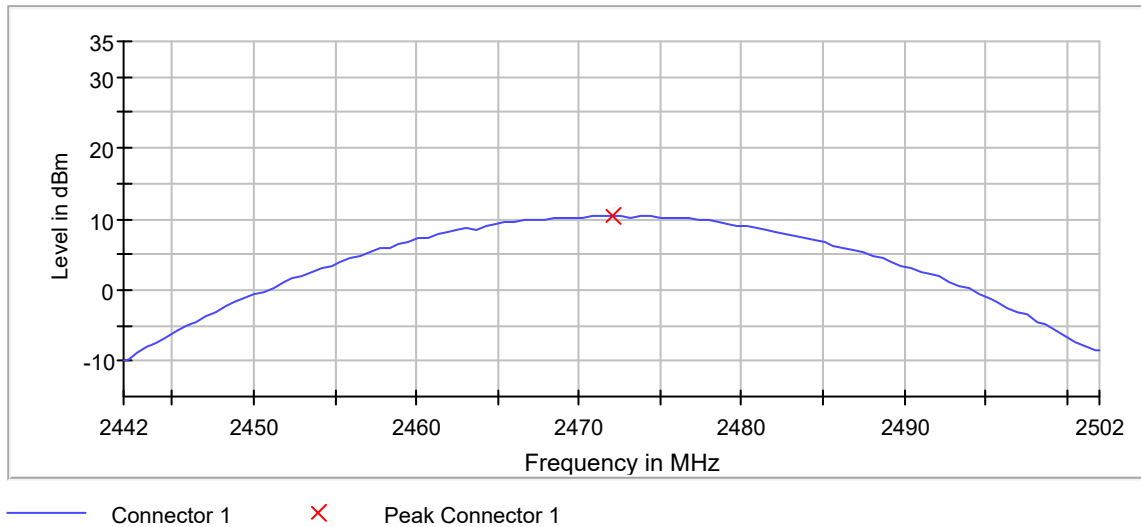

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.750 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.35 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2474.825000	-11.773	8.0	PASS

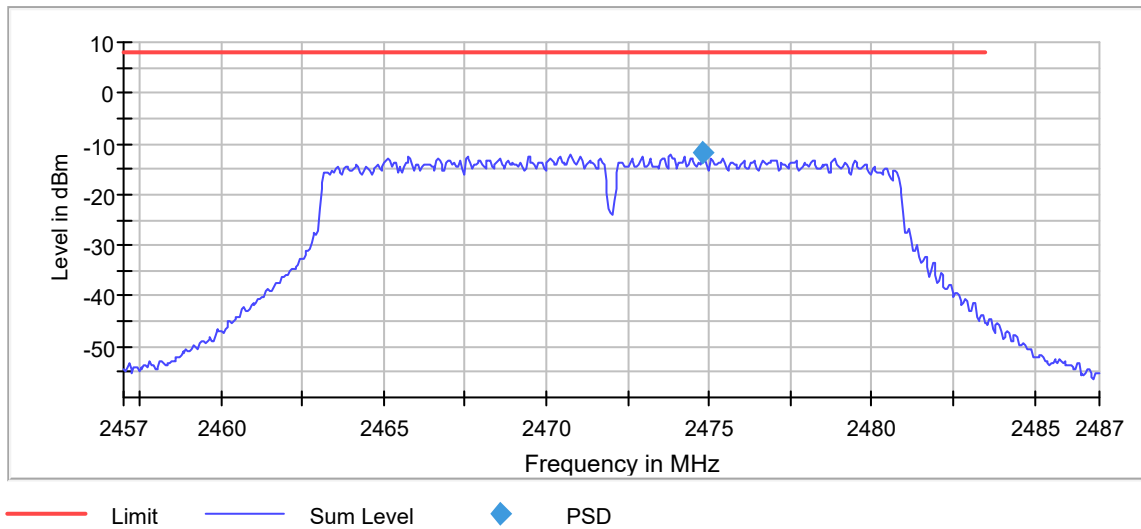

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.48 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	---	---	2463.150000	2480.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

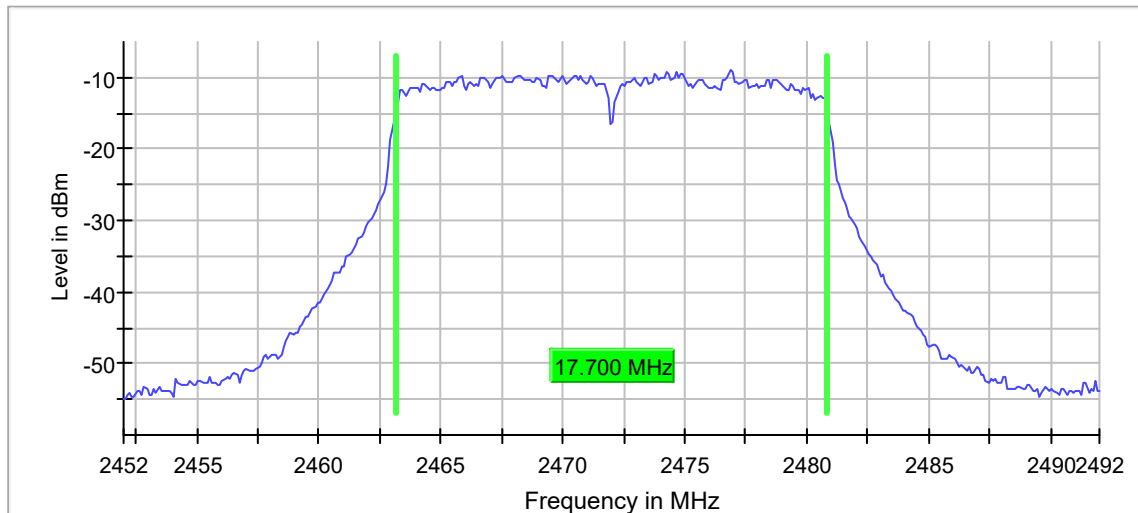

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	27 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.25 dB	0.30 dB

802.11n, MCS5

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.750000	0.500000	---	2403.125000	2420.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.3	PASS

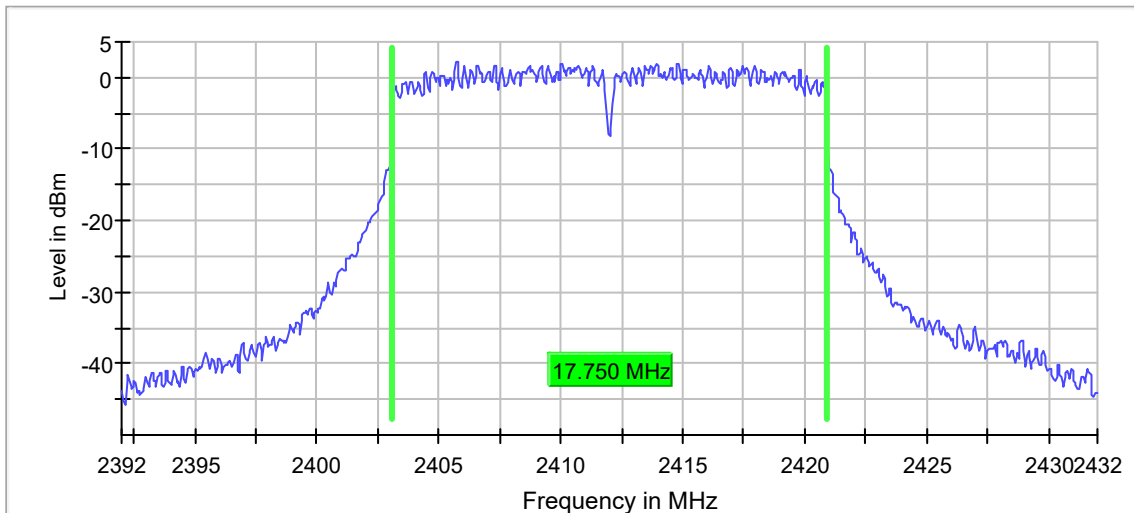

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.47 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.0	30.0	PASS

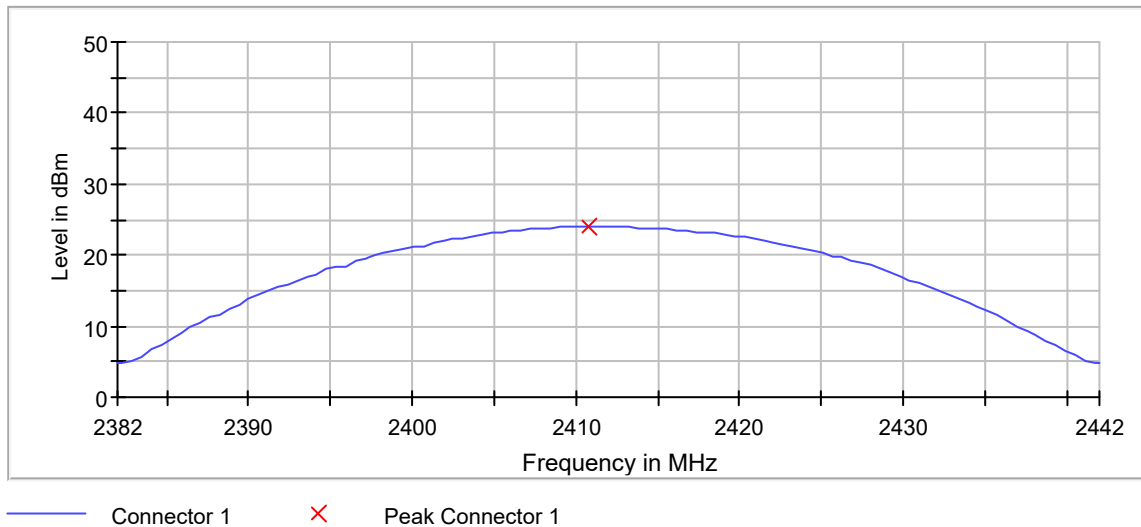

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.750 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2405.725000	2.483	8.0	PASS

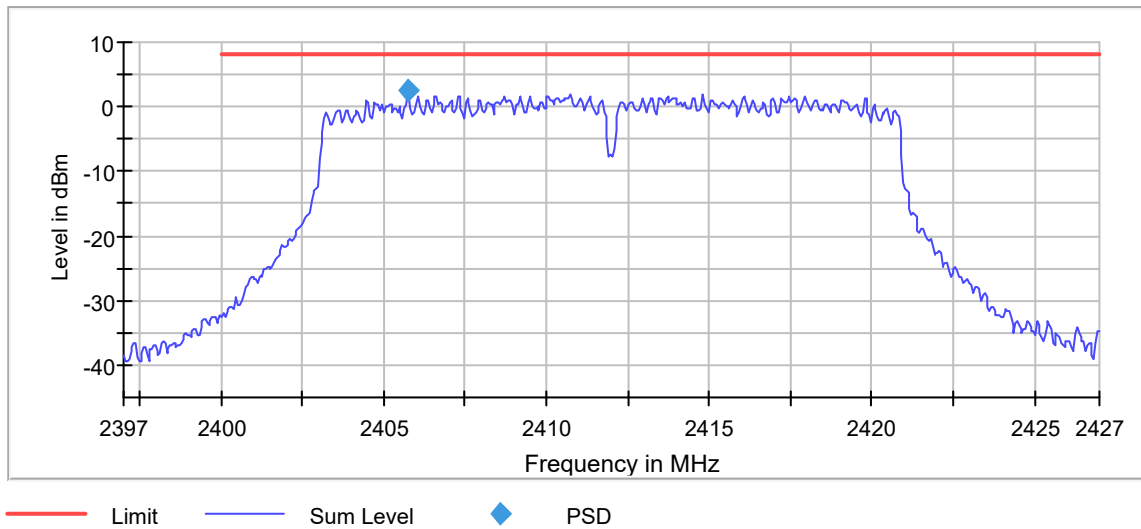

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.29 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	---	---	2403.150000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

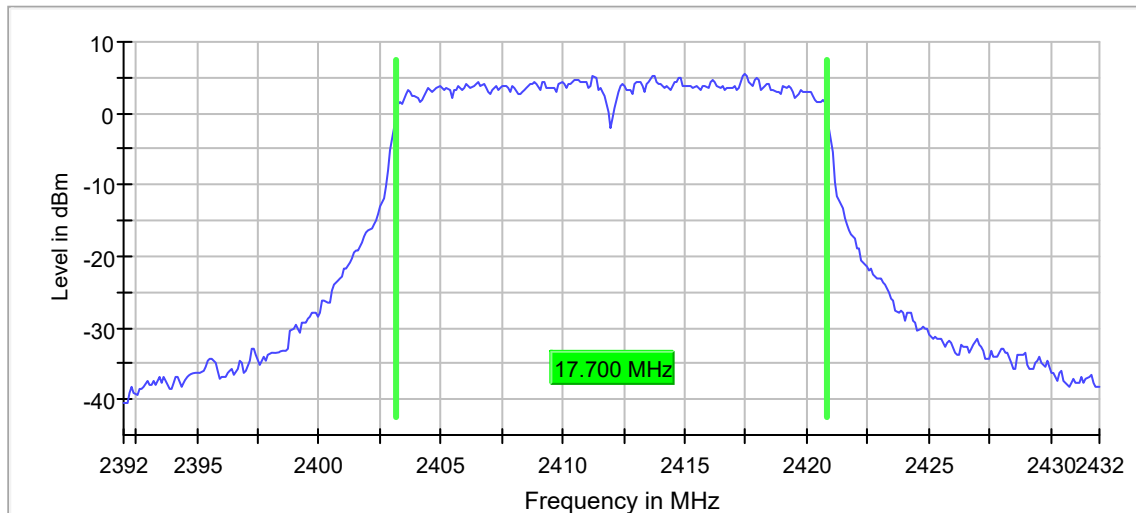

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.30 dB

and Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2405.725000	3.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-30.2	13.2	-16.9	PASS
2399.725000	-30.2	13.2	-16.9	PASS
2399.975000	-31.1	14.2	-16.9	PASS
2399.475000	-31.3	14.3	-16.9	PASS
2399.675000	-31.3	14.4	-16.9	PASS
2399.425000	-31.4	14.5	-16.9	PASS
2399.825000	-31.6	14.6	-16.9	PASS
2399.525000	-31.7	14.7	-16.9	PASS
2399.925000	-31.9	15.0	-16.9	PASS
2399.575000	-32.2	15.3	-16.9	PASS
2399.875000	-32.6	15.7	-16.9	PASS
2399.375000	-32.8	15.9	-16.9	PASS
2399.625000	-33.1	16.1	-16.9	PASS
2399.225000	-33.4	16.4	-16.9	PASS
2399.175000	-33.4	16.5	-16.9	PASS

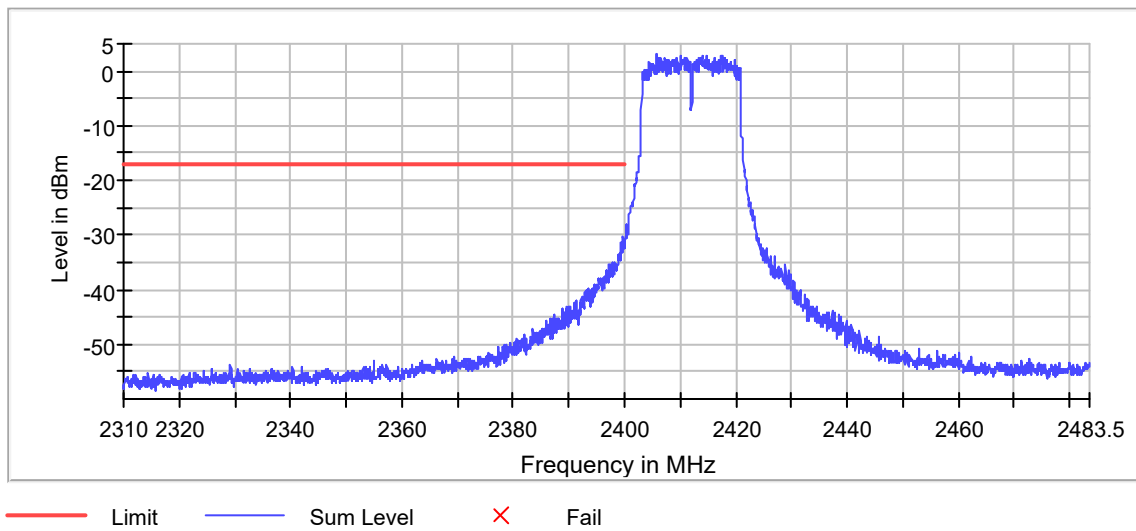

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.24 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.800000	0.500000	---	2428.125000	2445.925000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	1.8	PASS

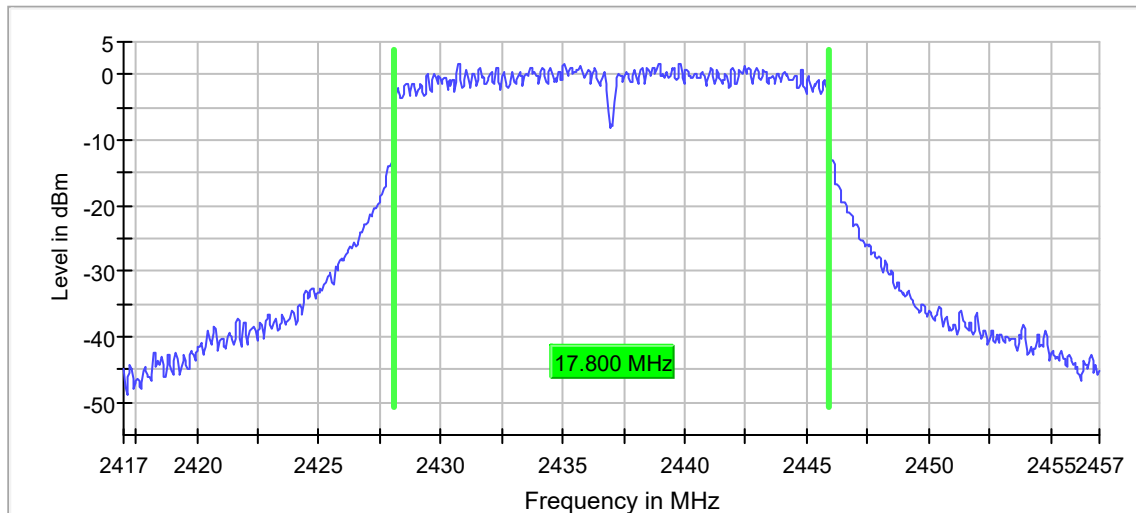

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.41 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	23.7	30.0	PASS

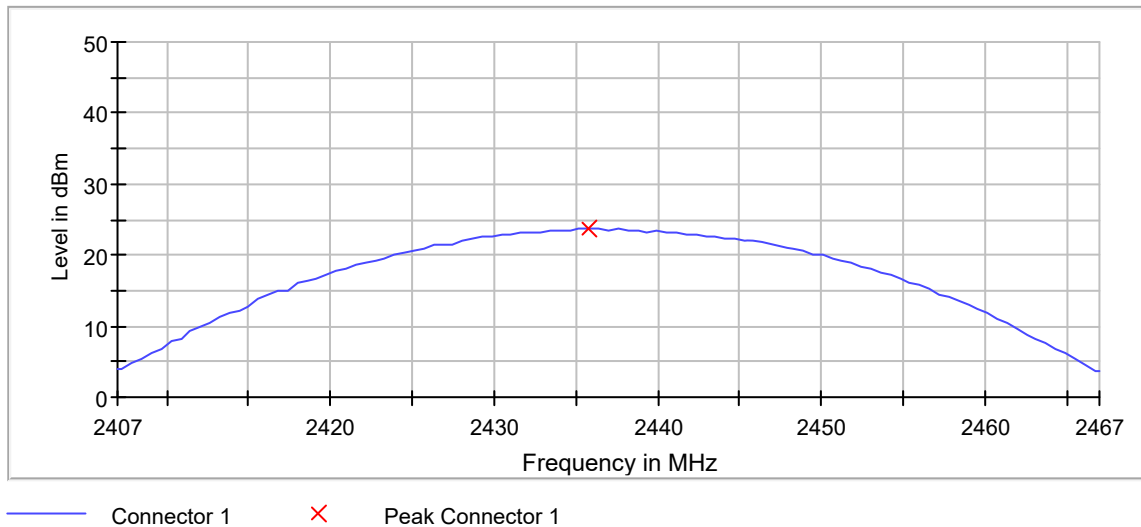

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2439.825000	1.785	8.0	PASS

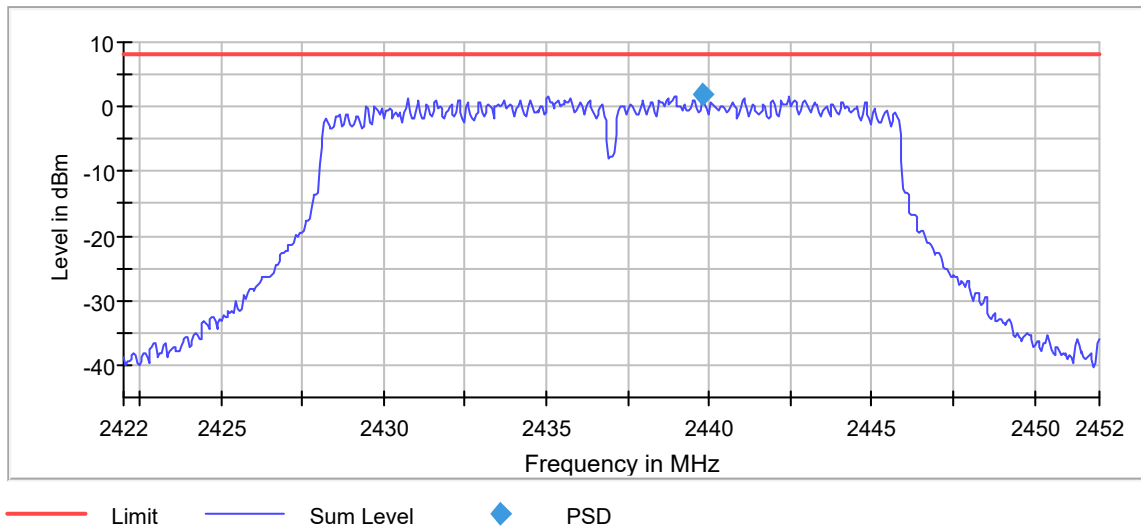

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.21 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	---	---	2428.150000	2445.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

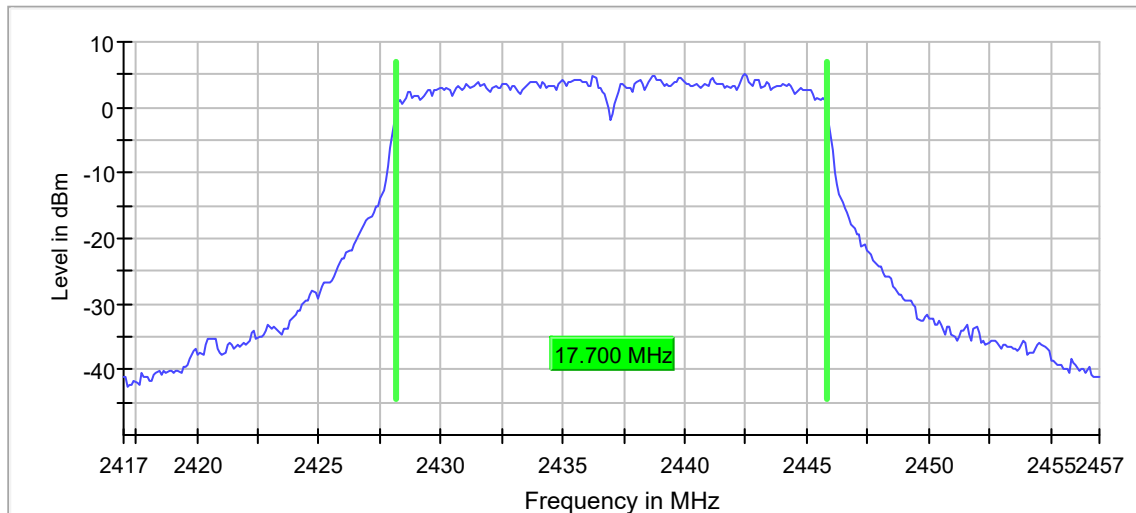

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	23 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.800000	0.500000	---	2463.125000	2480.925000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-11.7	PASS

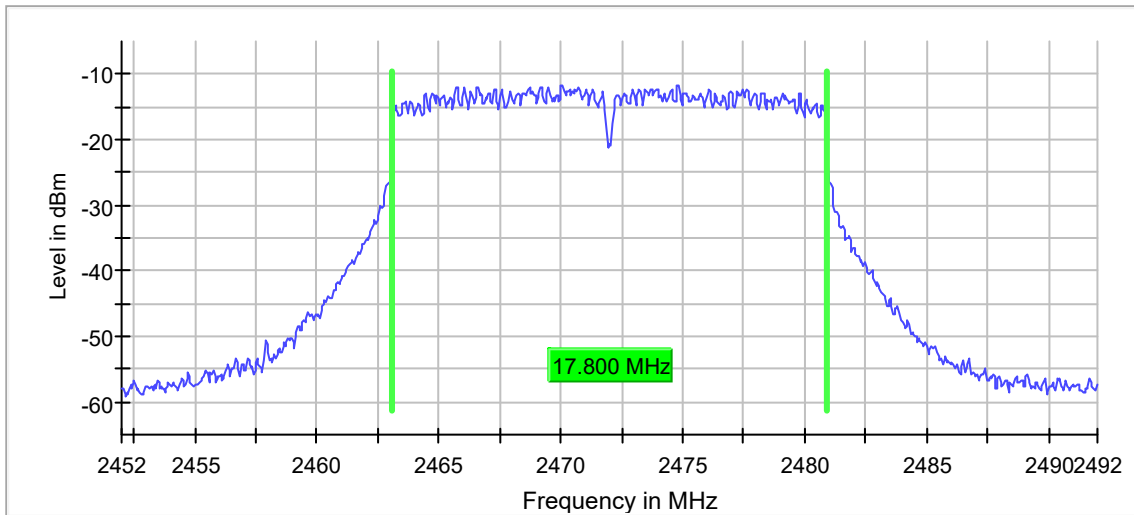

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	10.1	30.0	PASS

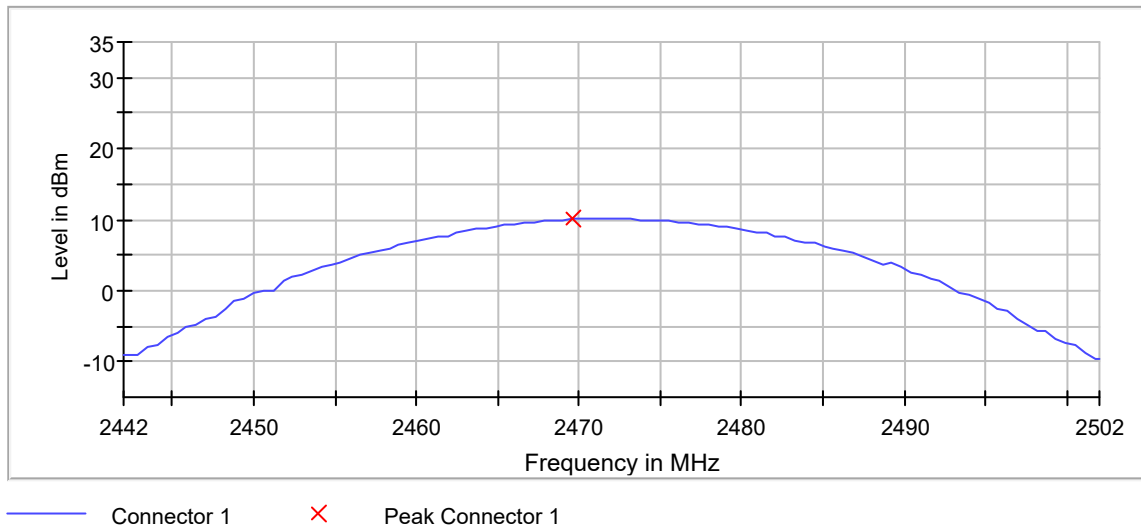

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.45 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2474.825000	-12.076	8.0	PASS

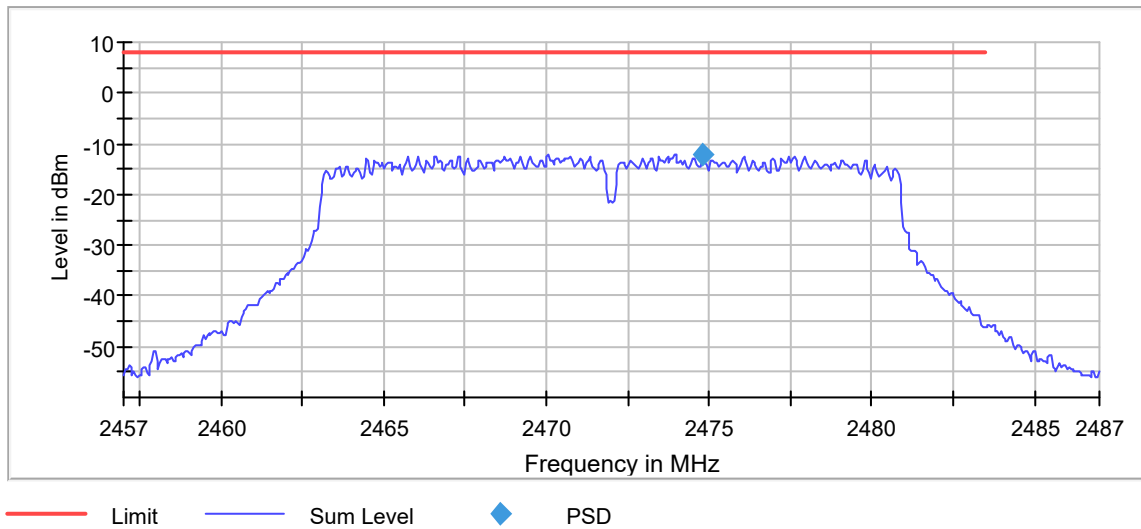

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.28 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	---	---	2463.150000	2480.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

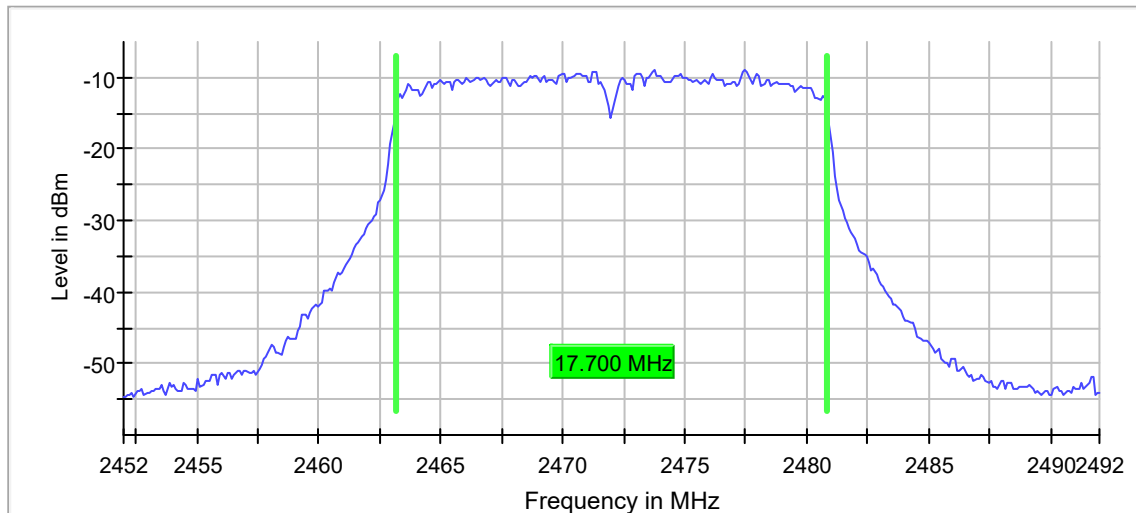

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	29 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

802.11n, MCS6

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.800000	0.500000	---	2403.075000	2420.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.4	PASS

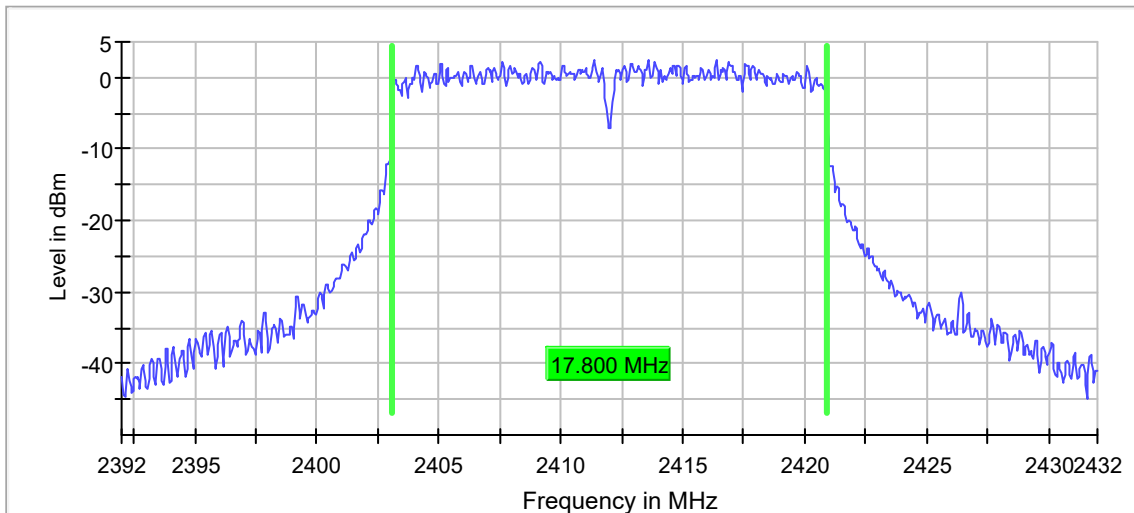

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	24 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.32 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.9	30.0	PASS

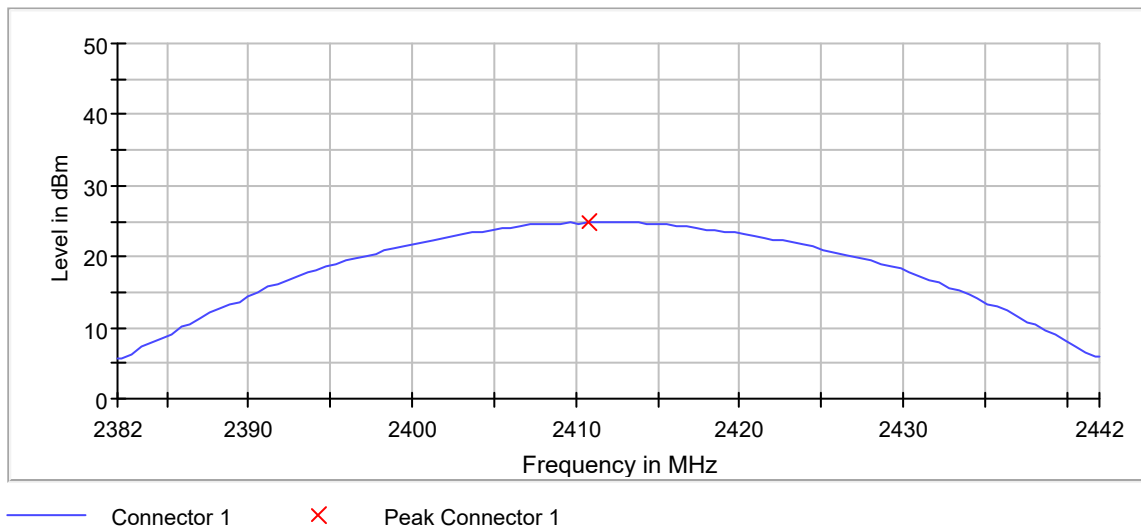

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2411.375000	2.439	8.0	PASS

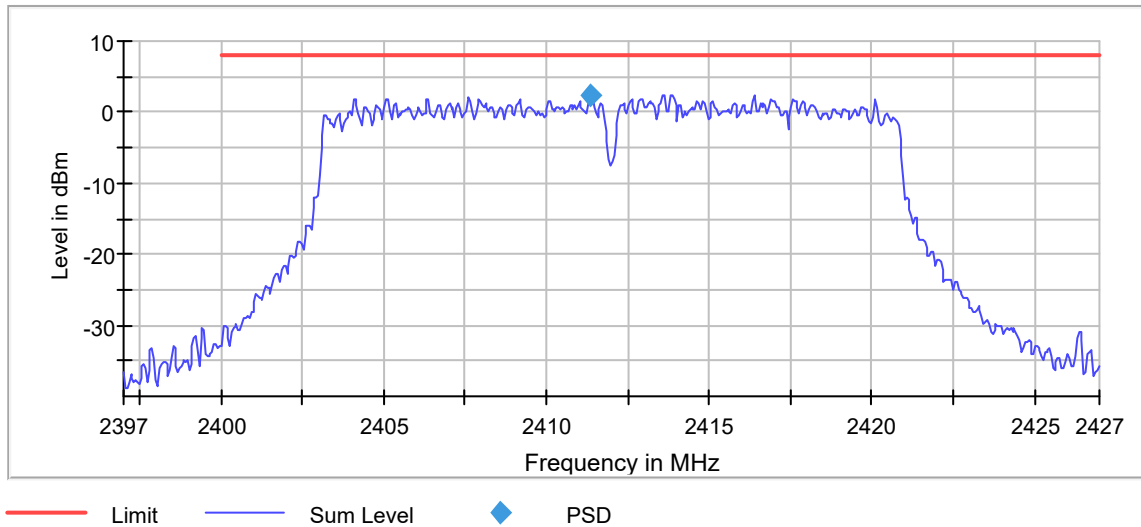

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.44 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	---	---	2403.150000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

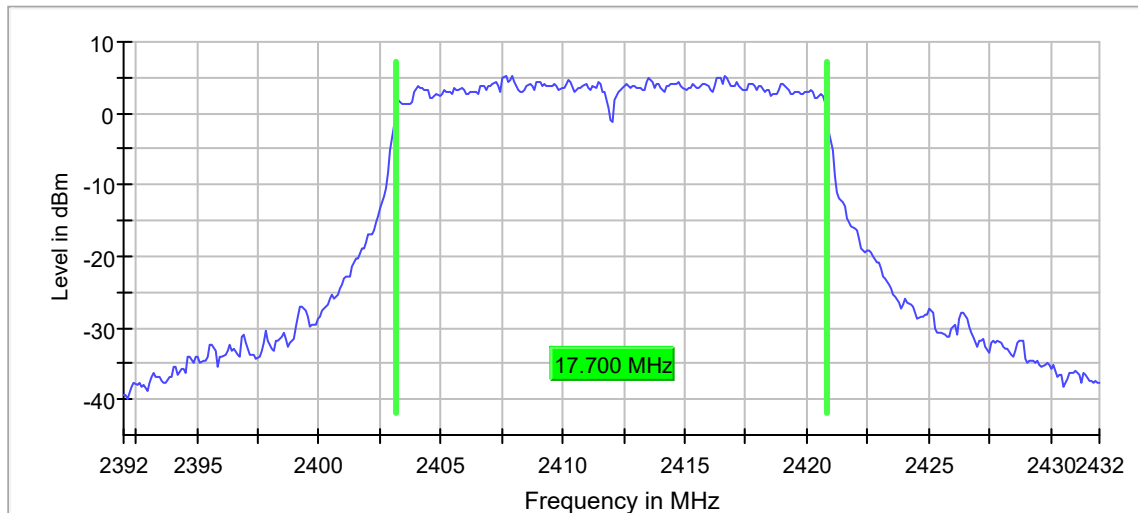

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	23 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2413.825000	3.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.425000	-29.5	12.8	-16.6	PASS
2399.475000	-30.1	13.5	-16.6	PASS
2399.375000	-30.1	13.5	-16.6	PASS
2399.175000	-30.4	13.8	-16.6	PASS
2399.225000	-30.7	14.1	-16.6	PASS
2399.125000	-30.7	14.1	-16.6	PASS
2399.975000	-31.4	14.8	-16.6	PASS
2399.825000	-31.8	15.2	-16.6	PASS
2399.875000	-31.8	15.2	-16.6	PASS
2398.525000	-32.1	15.5	-16.6	PASS
2399.925000	-32.3	15.7	-16.6	PASS
2398.575000	-32.3	15.7	-16.6	PASS
2399.525000	-32.3	15.7	-16.6	PASS
2399.575000	-32.4	15.8	-16.6	PASS
2399.725000	-32.4	15.8	-16.6	PASS

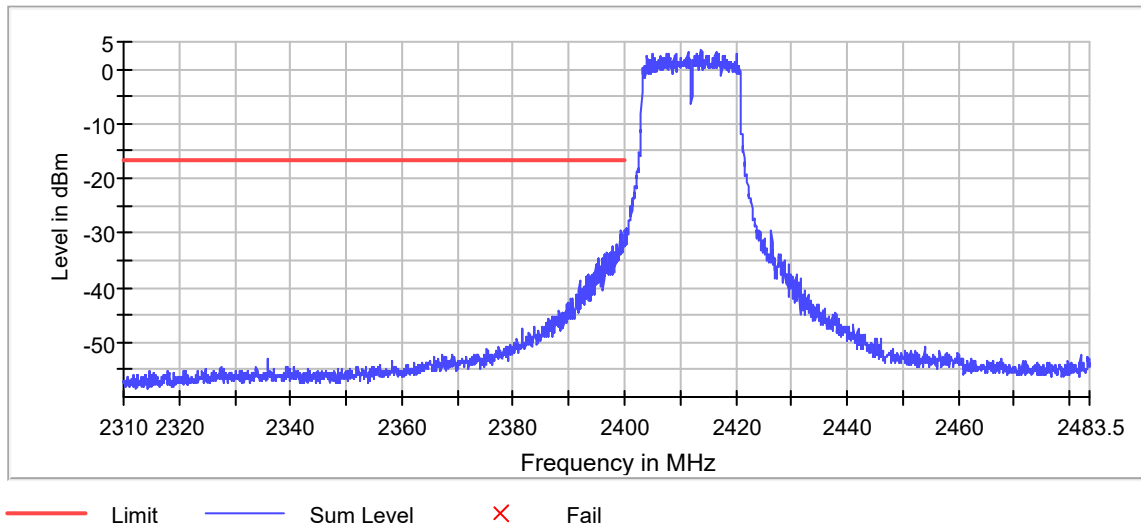

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.43 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.45 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.800000	0.500000	---	2428.075000	2445.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	2.0	PASS

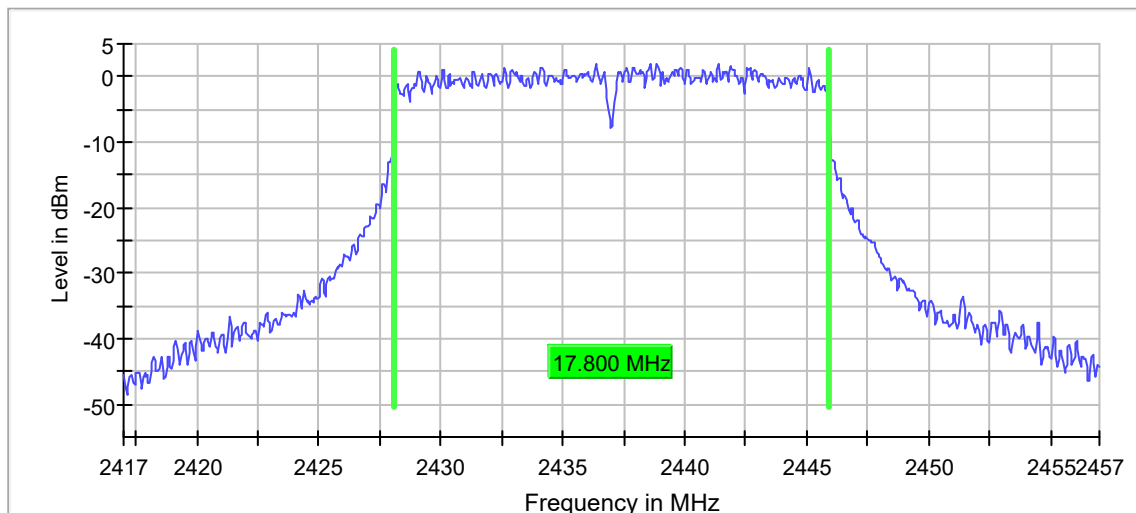

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.35 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	24.0	30.0	PASS

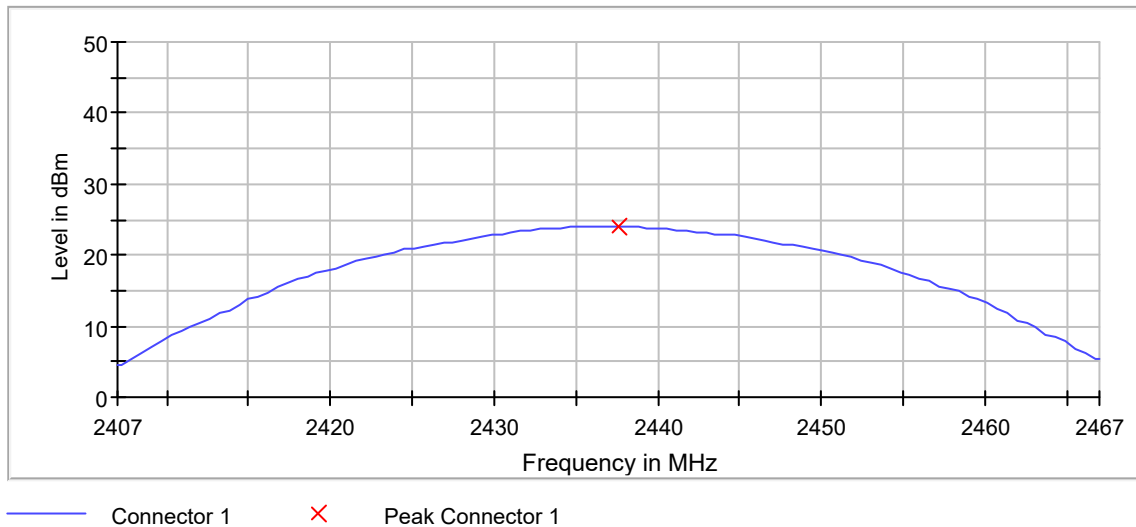

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.800 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2438.875000	2.012	8.0	PASS

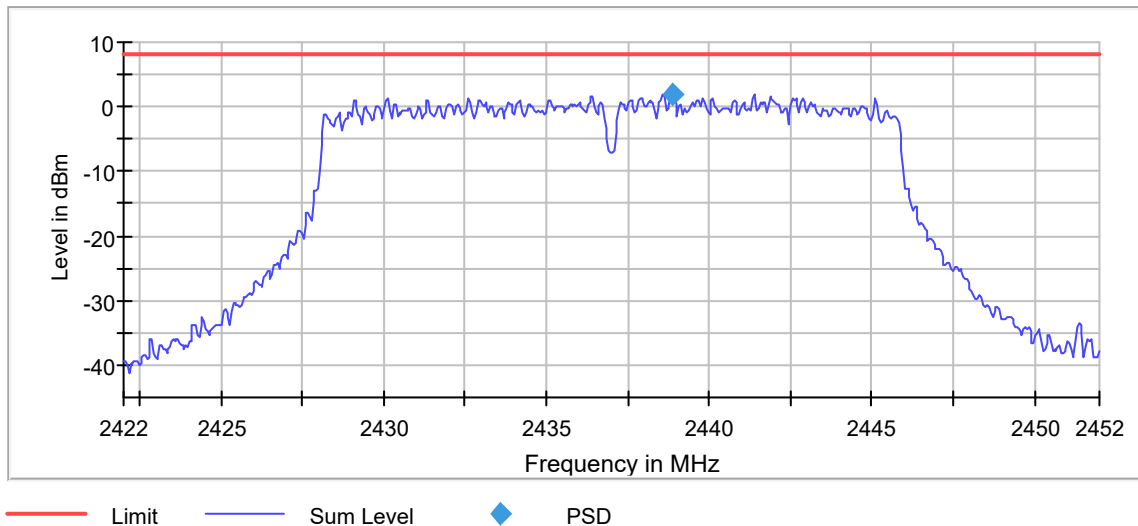

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.36 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	---	---	2428.150000	2445.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

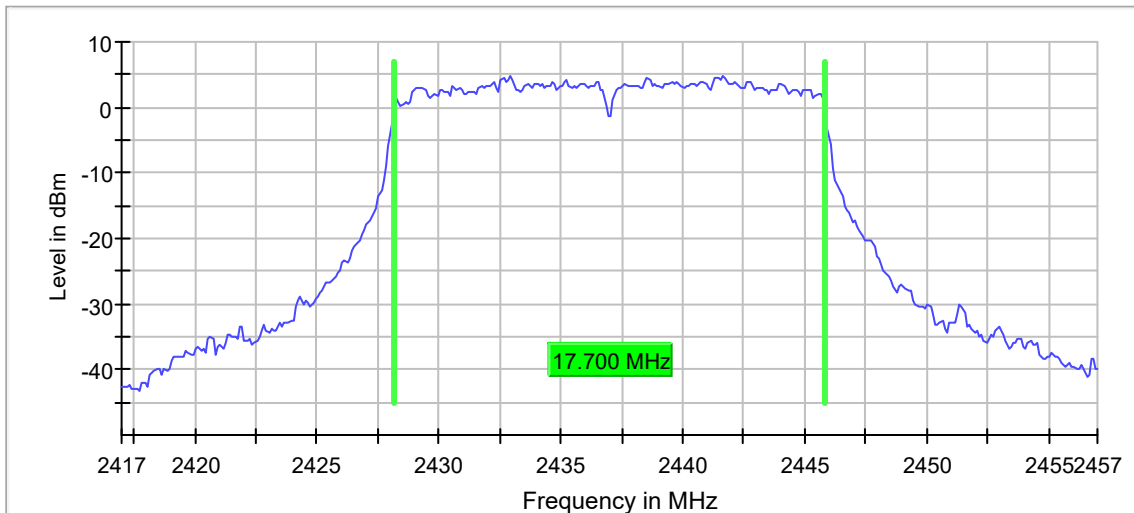

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.750000	0.500000	---	2463.125000	2480.875000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-11.6	PASS

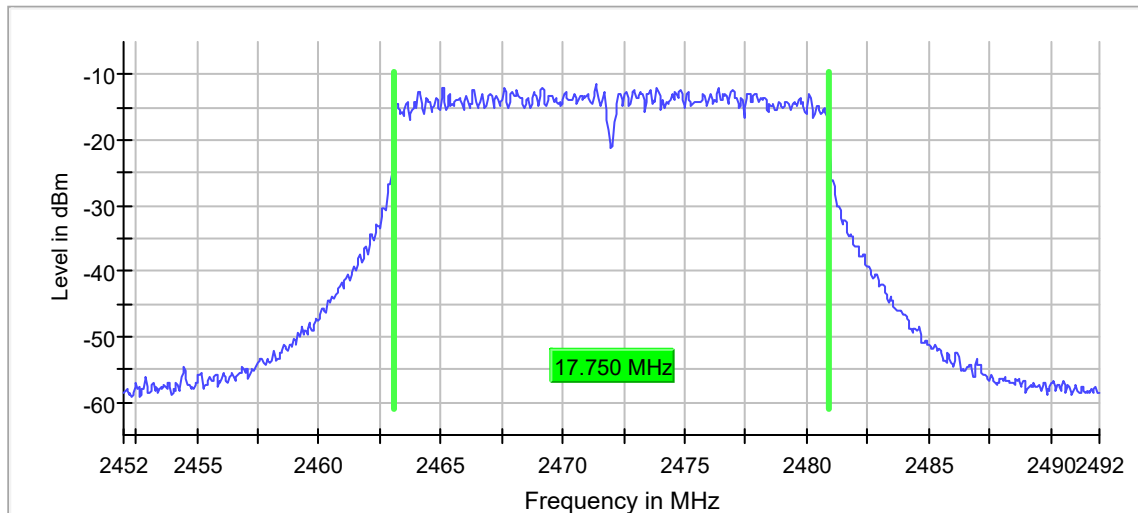

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.43 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	11.7	30.0	PASS

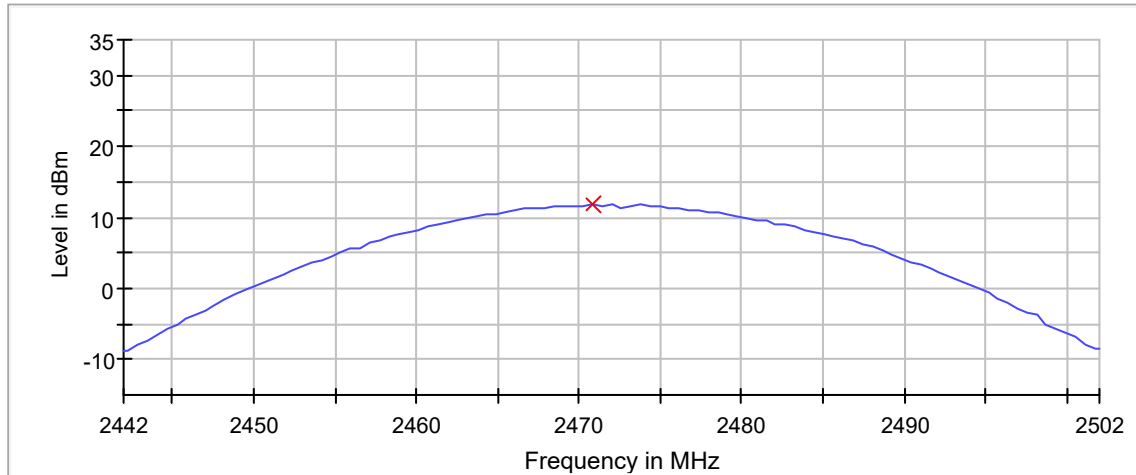

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	>= 17.750 MHz
VBW	80.000 MHz	>= 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2473.875000	-11.696	8.0	PASS

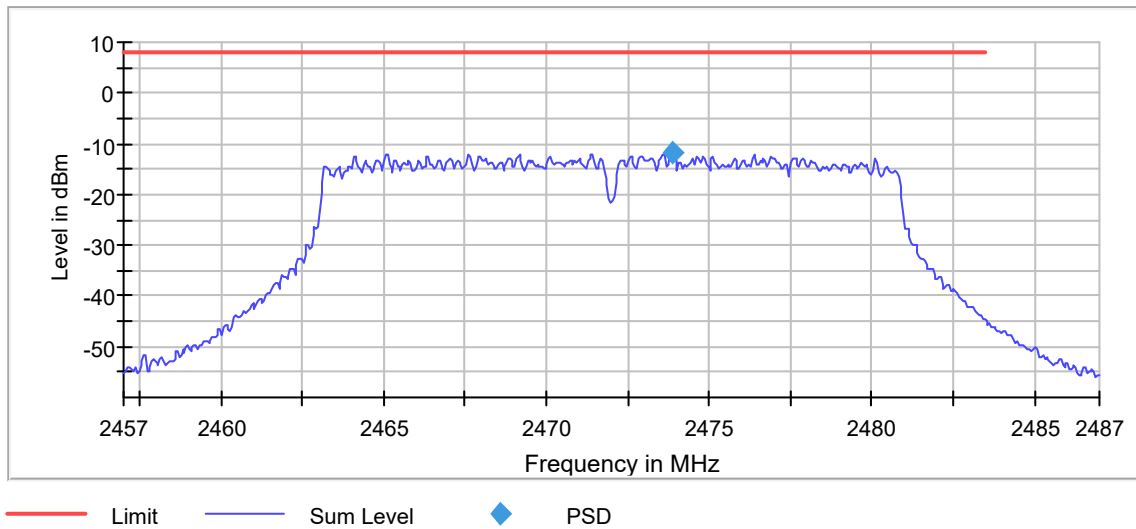

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.36 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	---	---	2463.150000	2480.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

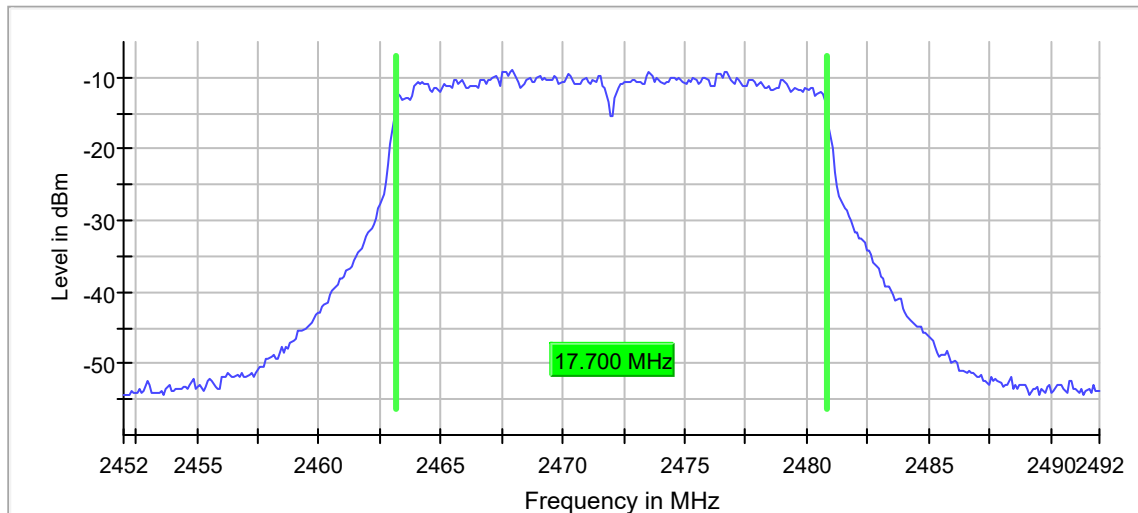

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	25 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.24 dB	0.30 dB

802.11n, MCS7

Minimum Emission Bandwidth 6 dB (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.850000	0.500000	---	2403.075000	2420.925000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2412.000000	2.3	PASS

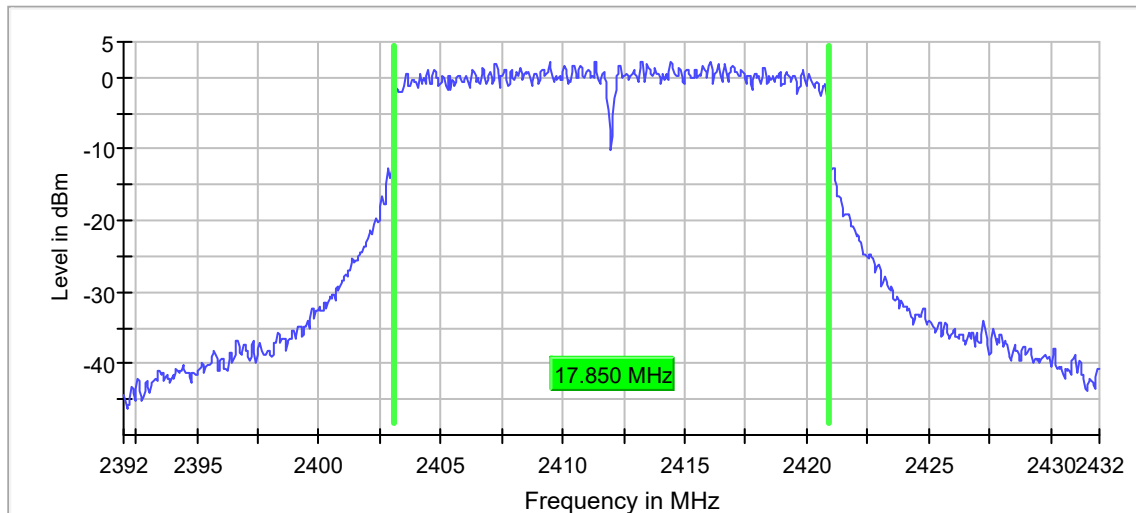

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.33 dB	0.50 dB

Peak output power (Sweep) (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	24.4	30.0	PASS

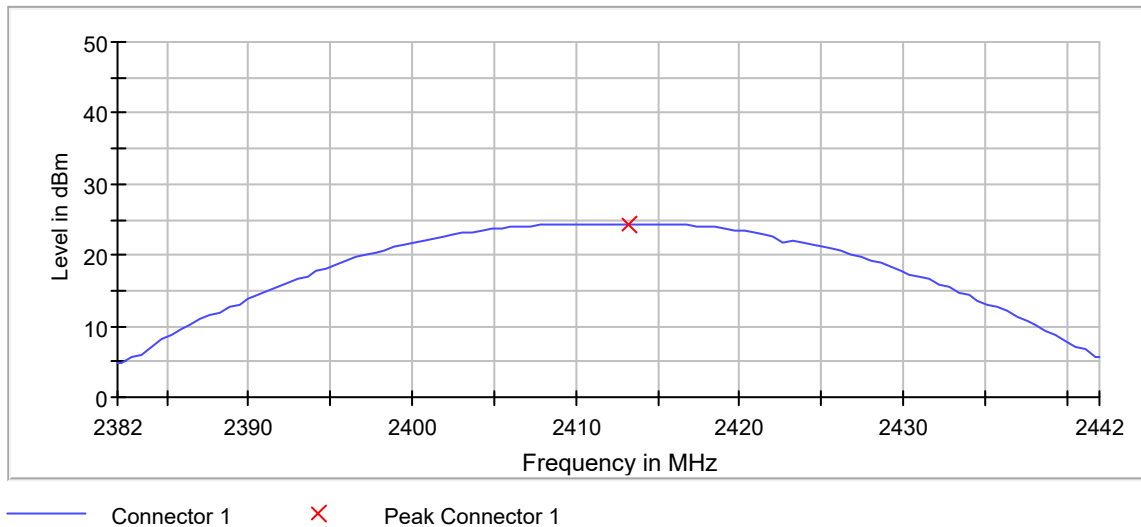

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.850 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.50 dB

Peak Power Spectral Density (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2411.375000	2.295	8.0	PASS

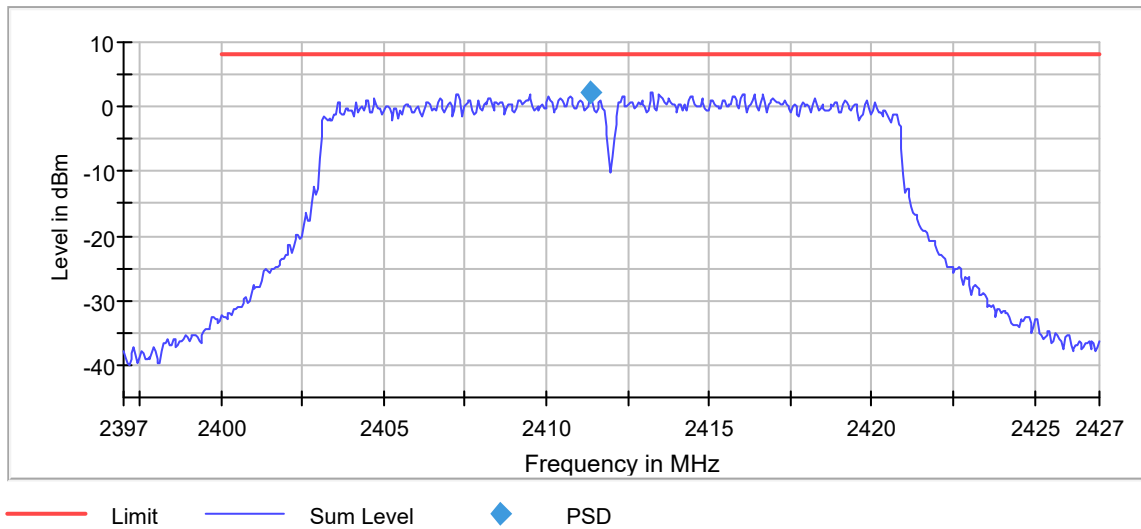

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.42700 GHz	2.42700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweptime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.36 dB	0.50 dB

Occupied Channel Bandwidth 99% (2412 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.700000	---	---	2403.150000	2420.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2412.000000	PASS

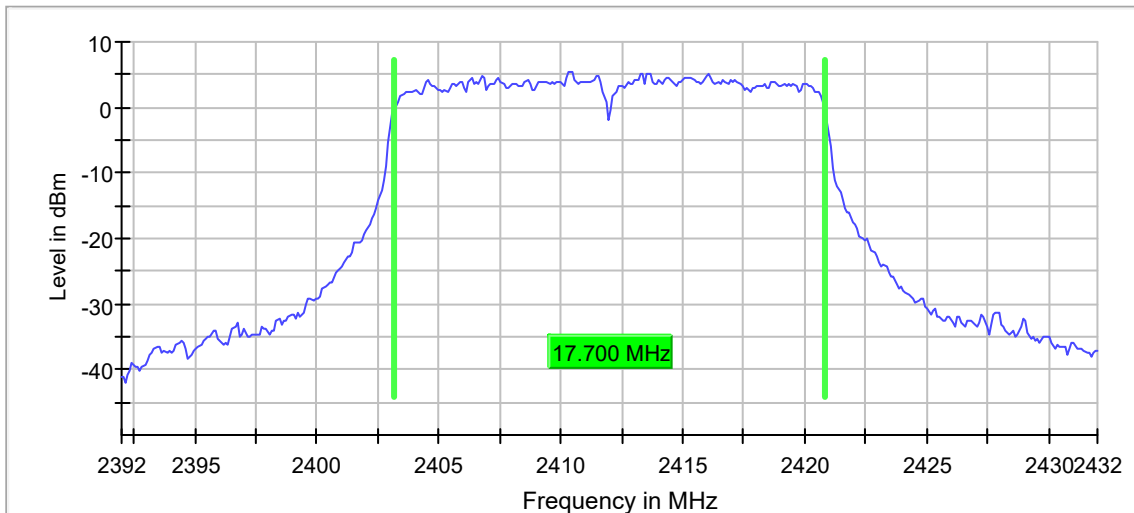

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.43200 GHz	2.43200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	29 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.30 dB

Band Edge low (2412 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2412.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2413.225000	3.2

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-31.4	14.6	-16.8	PASS
2399.725000	-31.5	14.7	-16.8	PASS
2399.975000	-31.6	14.7	-16.8	PASS
2399.825000	-31.7	14.9	-16.8	PASS
2399.875000	-31.9	15.1	-16.8	PASS
2399.925000	-32.7	15.8	-16.8	PASS
2399.675000	-32.9	16.0	-16.8	PASS
2399.525000	-33.0	16.1	-16.8	PASS
2399.575000	-33.1	16.3	-16.8	PASS
2399.475000	-33.3	16.5	-16.8	PASS
2399.425000	-33.9	17.1	-16.8	PASS
2399.625000	-33.9	17.1	-16.8	PASS
2399.175000	-34.0	17.2	-16.8	PASS
2399.125000	-34.2	17.4	-16.8	PASS
2398.925000	-34.2	17.4	-16.8	PASS

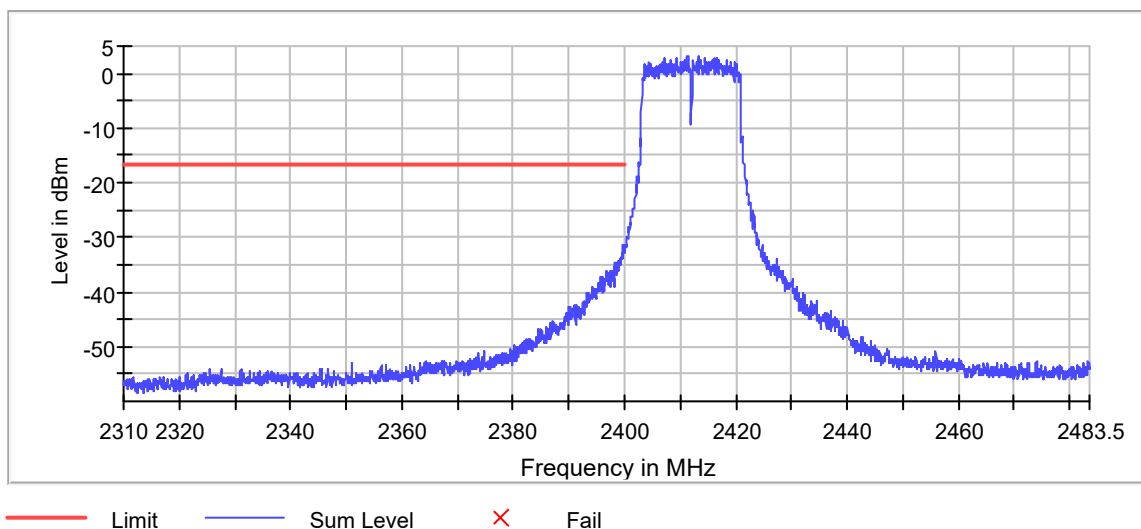

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.850000	0.500000	---	2428.075000	2445.925000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	1.7	PASS

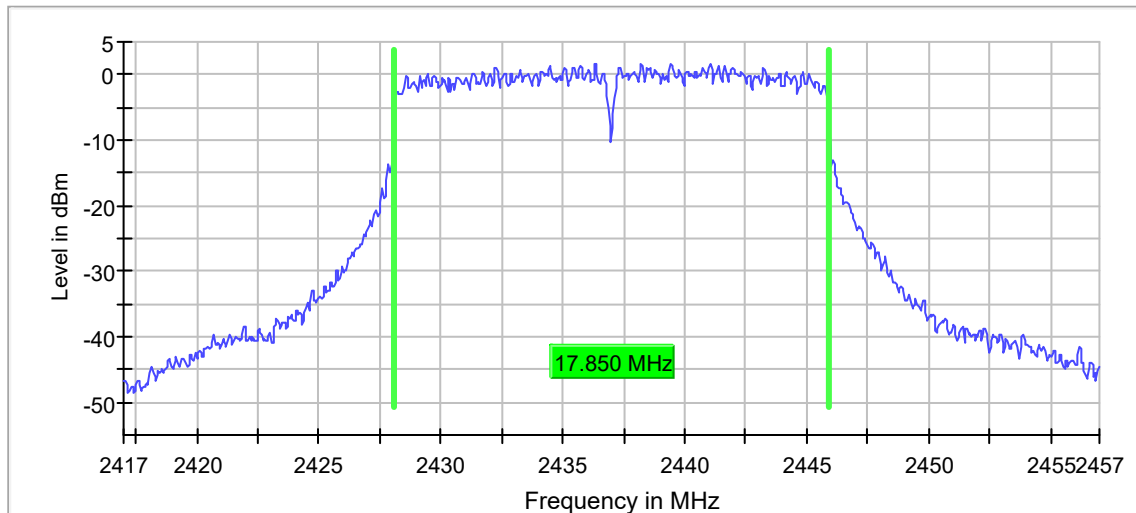

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.16 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	23.6	30.0	PASS

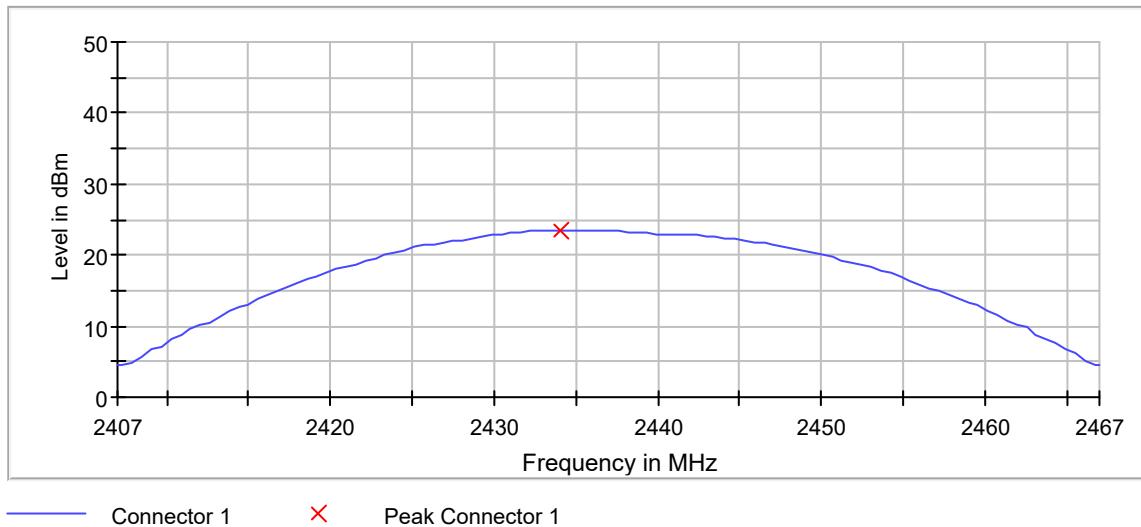

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.850 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.32 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2439.425000	1.638	8.0	PASS

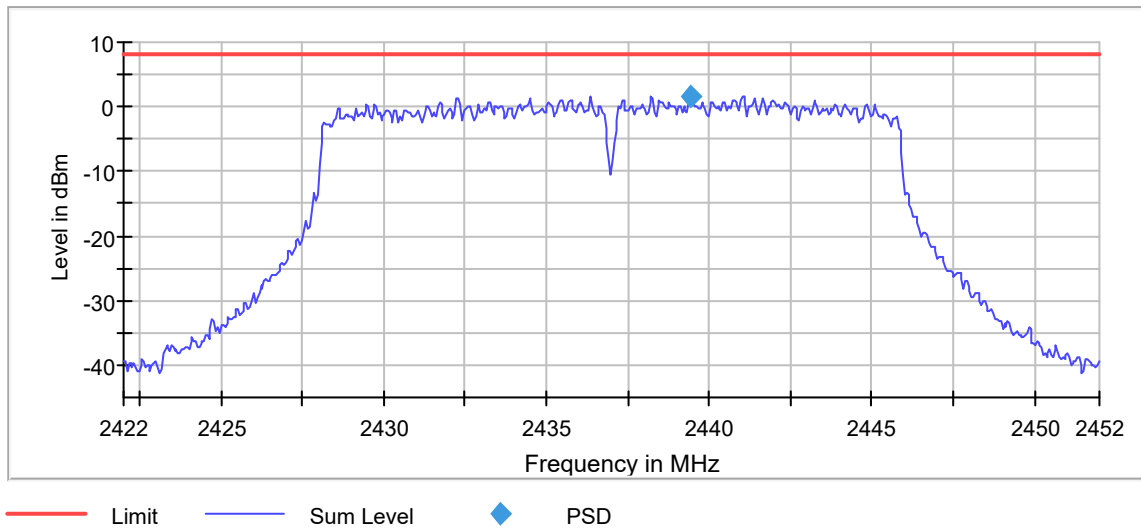

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.24 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	17.700000	---	---	2428.150000	2445.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

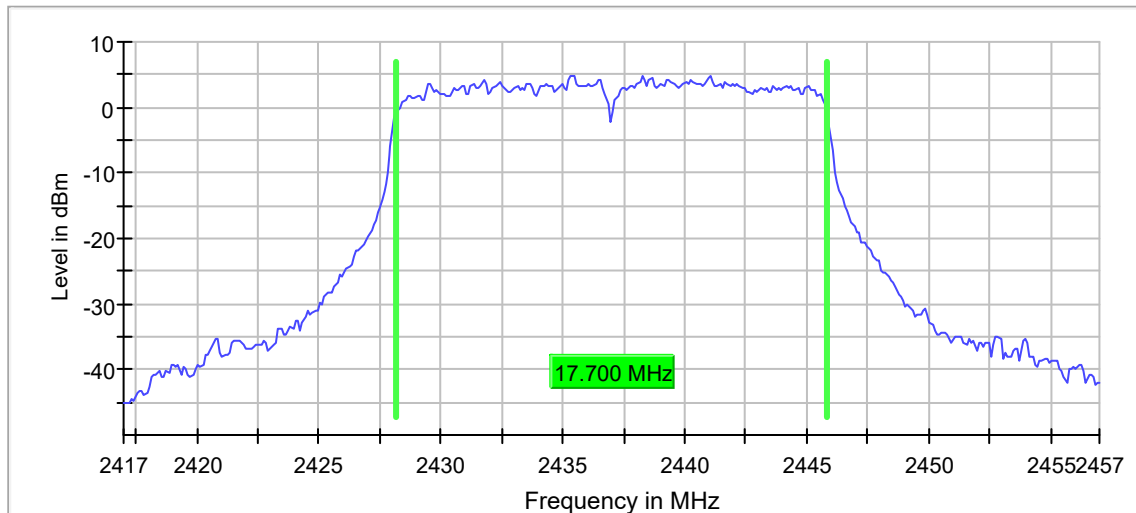

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41700 GHz	2.41700 GHz
Stop Frequency	2.45700 GHz	2.45700 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.850000	0.500000	---	2463.075000	2480.925000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2472.000000	-11.9	PASS

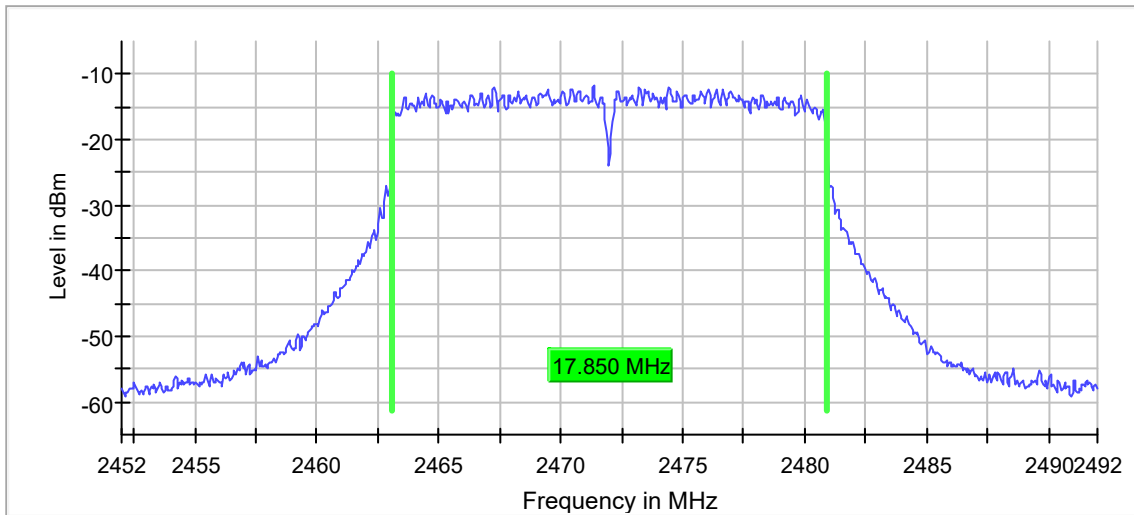

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	20 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.36 dB	0.50 dB

Peak output power (Sweep) (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2472.000000	10.6	30.0	PASS

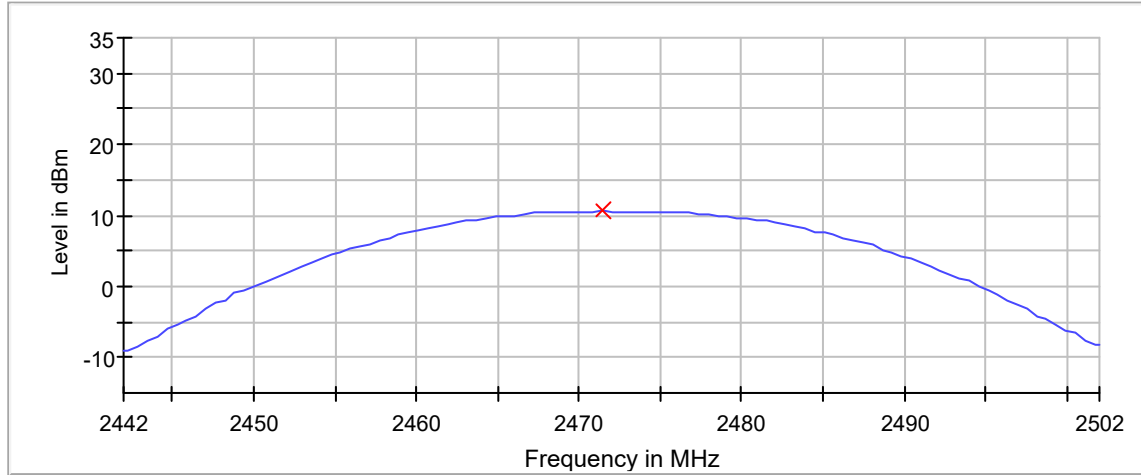

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.50200 GHz	2.50200 GHz
Span	60.000 MHz	60.000 MHz
RBW	20.000 MHz	≥ 17.850 MHz
VBW	80.000 MHz	≥ 60.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.50 dB

Peak Power Spectral Density (2472 MHz; 15.000 dBm; 20 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2472.000000	2473.225000	-11.913	8.0	PASS

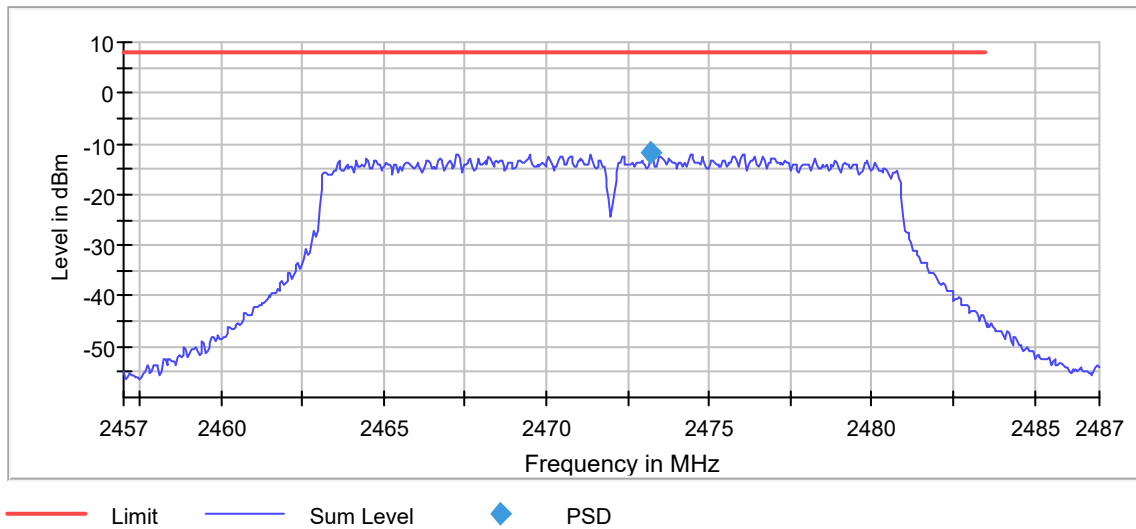

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45700 GHz	2.45700 GHz
Stop Frequency	2.48700 GHz	2.48700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	1.040 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.39 dB	0.50 dB

Occupied Channel Bandwidth 99% (2472 MHz; 15.000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2472.000000	17.700000	---	---	2463.150000	2480.850000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2472.000000	PASS

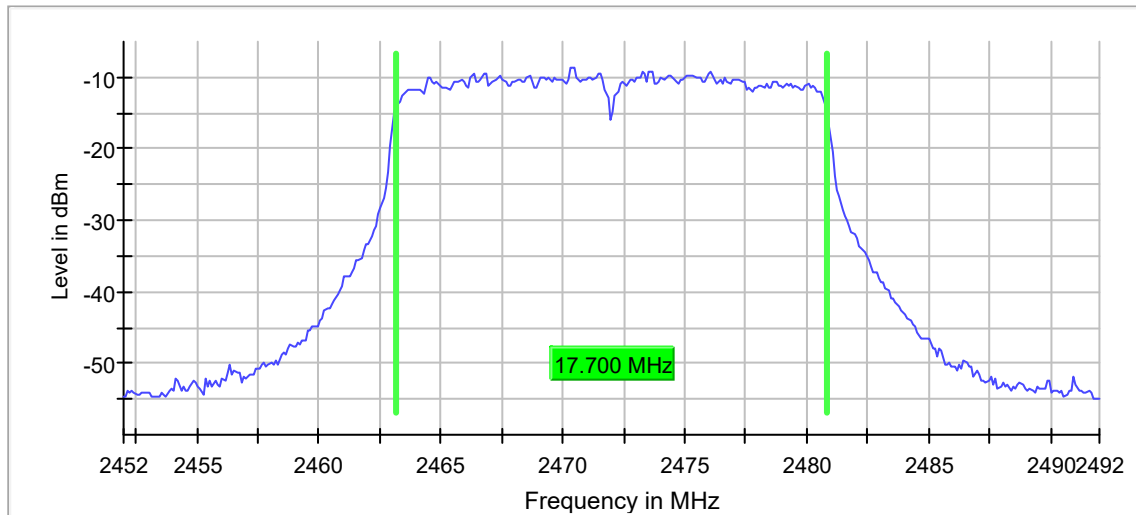

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.45200 GHz	2.45200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	22 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.30 dB

802.11n, 40MHz, MCS0

Minimum Emission Bandwidth 6 dB (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.400000	0.500000	---	2403.775000	2440.175000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2422.000000	2.1	PASS

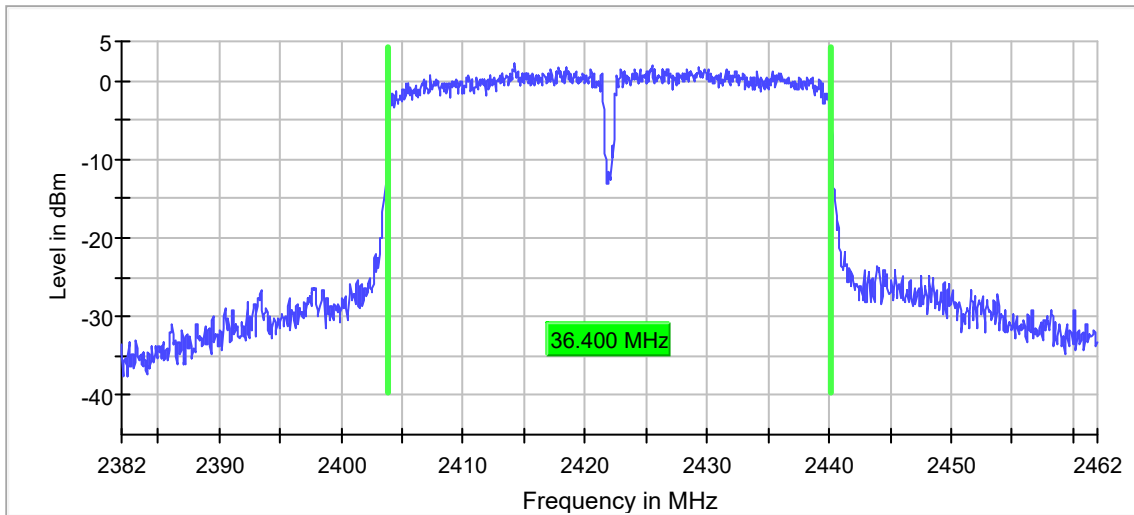

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.50 dB	0.50 dB

Peak output power (Sweep) (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	26.6	30.0	PASS

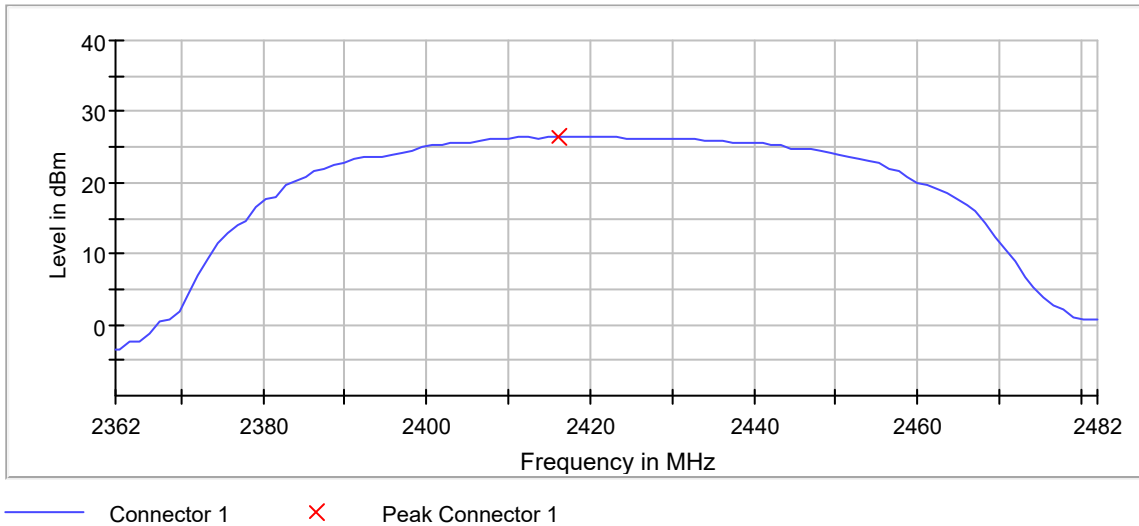

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.36200 GHz	2.36200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.400 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.35 dB	0.50 dB

Peak Power Spectral Density (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2414.225000	2.466	8.0	PASS

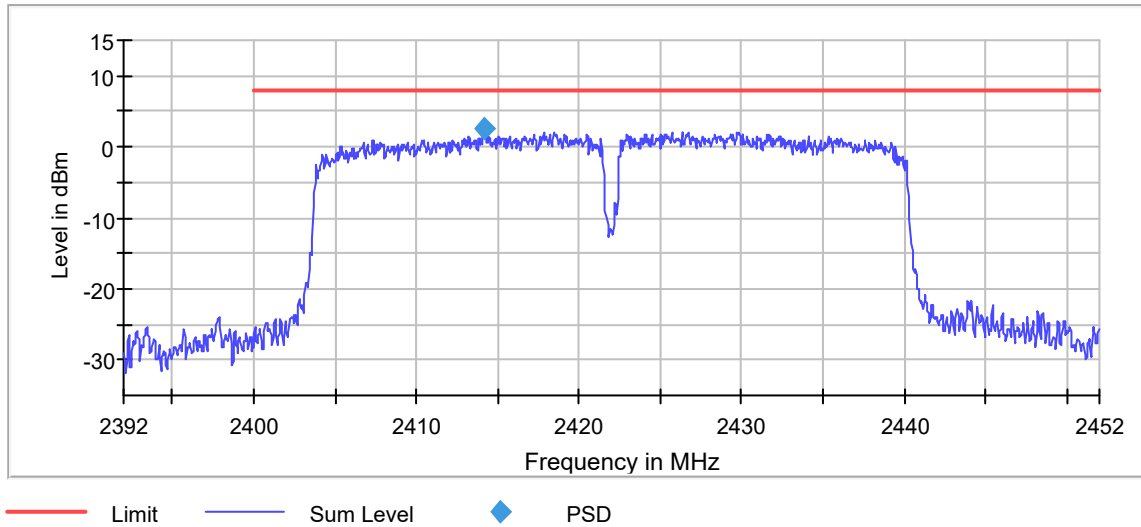

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	22 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.50 dB	0.50 dB

Occupied Channel Bandwidth 99% (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.250000	---	---	2403.875000	2440.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

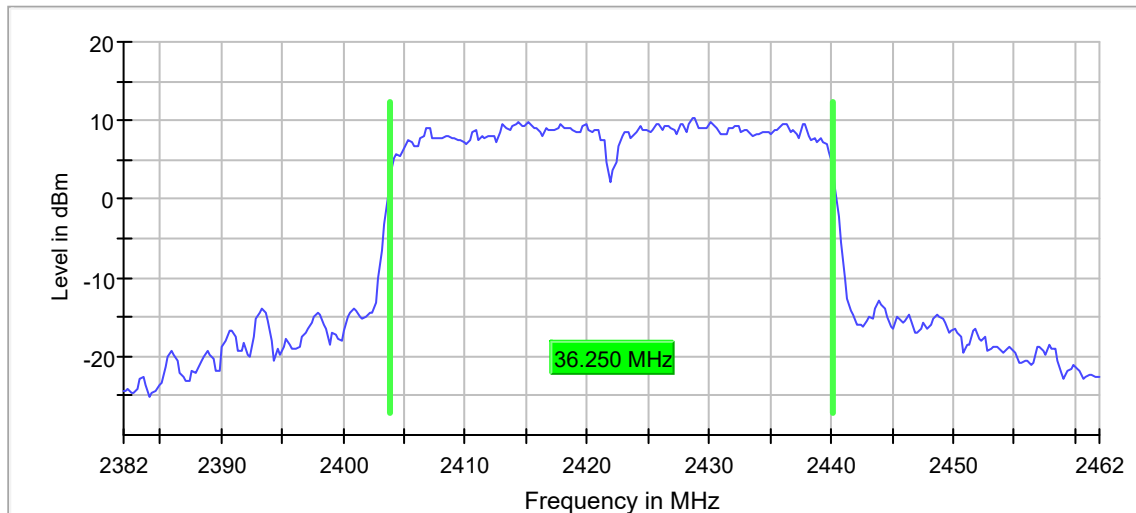

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	19 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Band Edge low (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2422.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2425.475000	3.3

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2397.825000	-23.2	6.5	-16.7	PASS
2397.875000	-23.2	6.5	-16.7	PASS
2397.925000	-23.4	6.7	-16.7	PASS
2397.775000	-23.7	7.1	-16.7	PASS
2398.475000	-23.8	7.2	-16.7	PASS
2397.975000	-23.9	7.2	-16.7	PASS
2397.725000	-24.0	7.3	-16.7	PASS
2398.525000	-24.0	7.4	-16.7	PASS
2393.475000	-24.2	7.5	-16.7	PASS
2398.575000	-24.2	7.5	-16.7	PASS
2393.425000	-24.2	7.6	-16.7	PASS
2393.525000	-24.2	7.6	-16.7	PASS
2397.675000	-24.3	7.6	-16.7	PASS
2398.425000	-24.4	7.7	-16.7	PASS
2397.475000	-24.6	7.9	-16.7	PASS

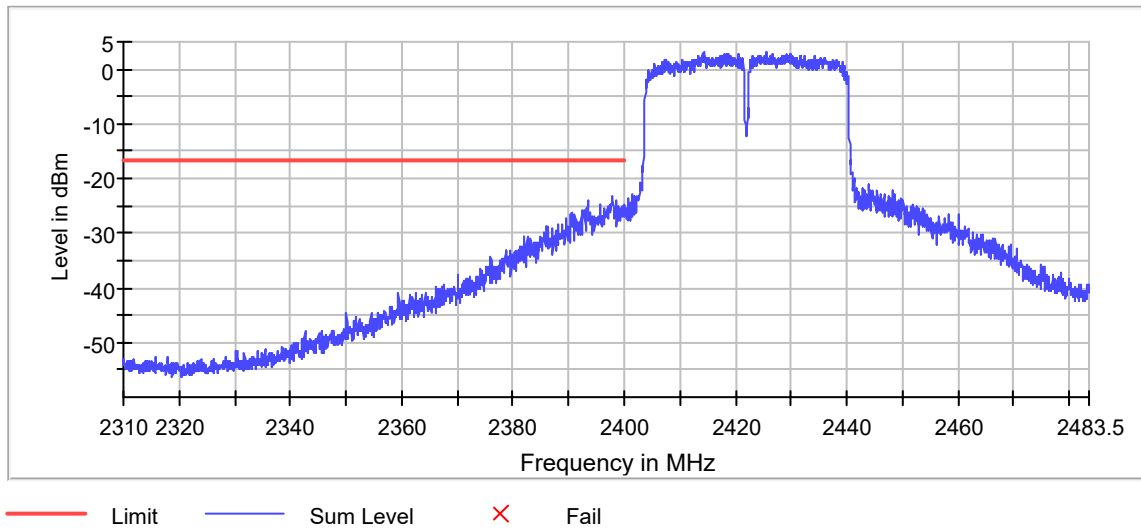

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	31 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.39 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.38 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.400000	0.500000	---	2418.775000	2455.175000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	2.6	PASS

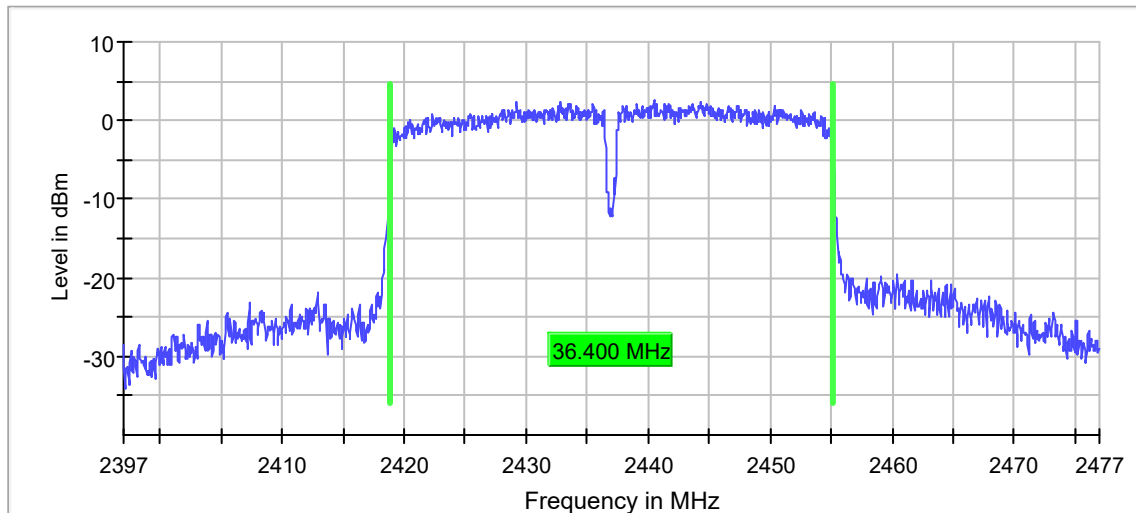

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	20 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.40 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.9	30.0	PASS

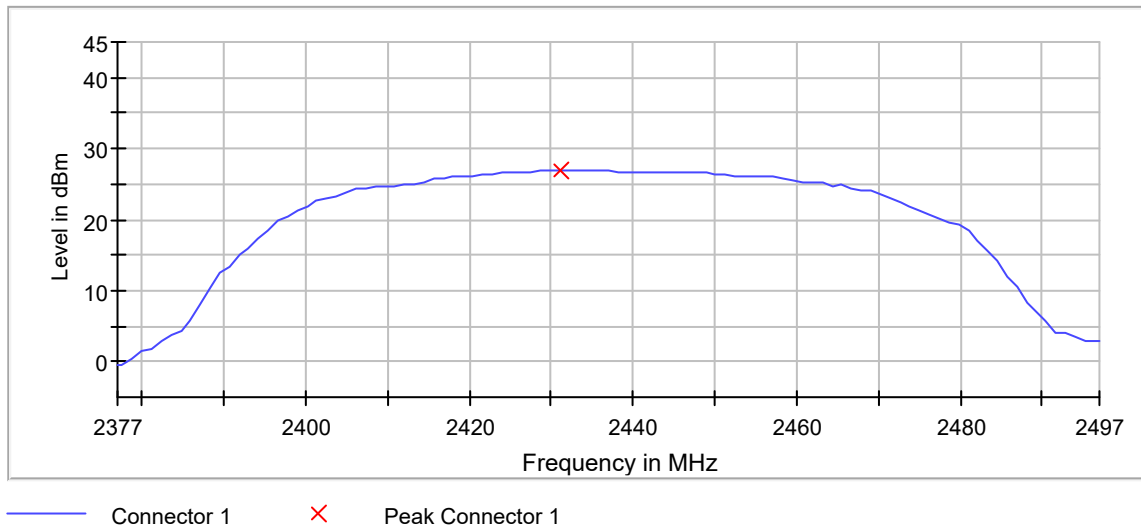

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.37700 GHz	2.37700 GHz
Stop Frequency	2.49700 GHz	2.49700 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.400 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2432.825000	2.168	8.0	PASS

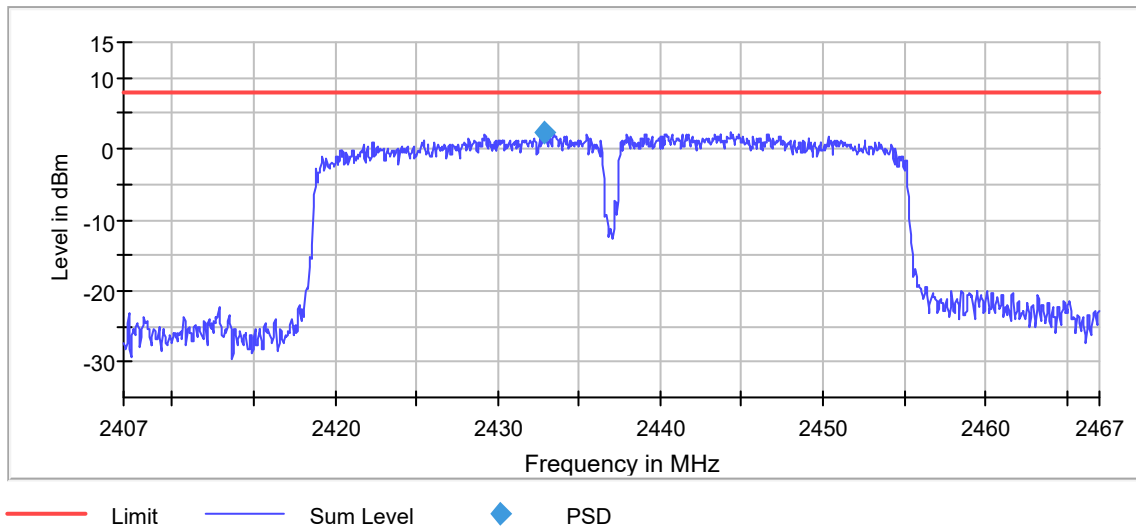

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.40 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.500000	---	---	2418.875000	2455.375000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

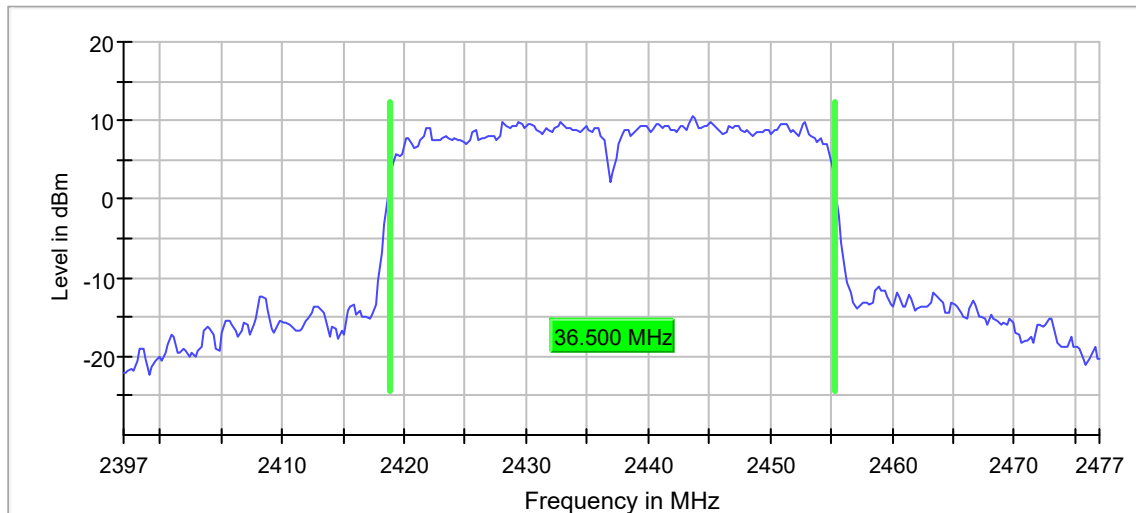

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	19 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.400000	0.500000	---	2433.775000	2470.175000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2452.000000	2.3	PASS

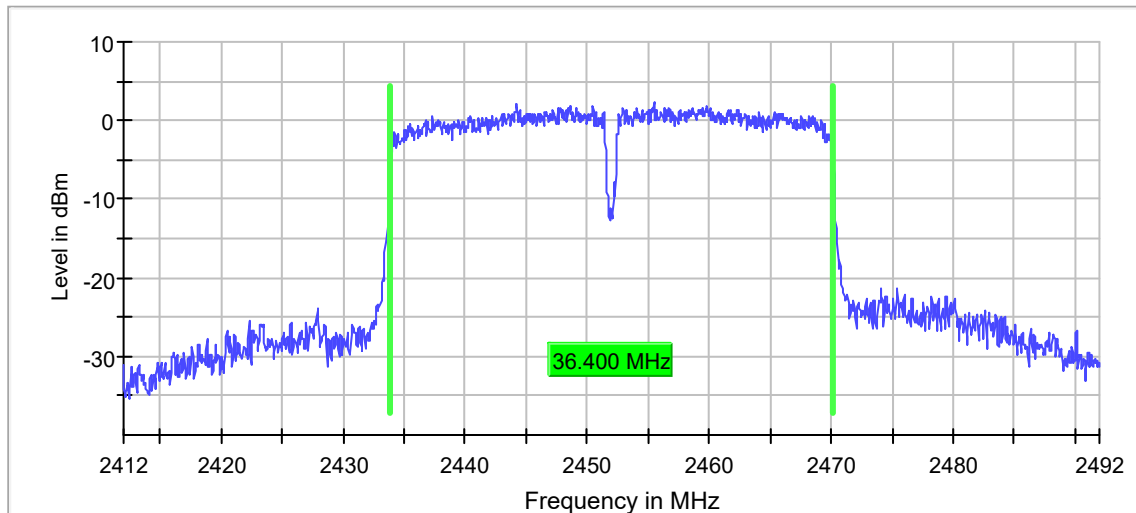

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	32 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.31 dB	0.50 dB

Peak output power (Sweep) (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2452.000000	26.8	30.0	PASS

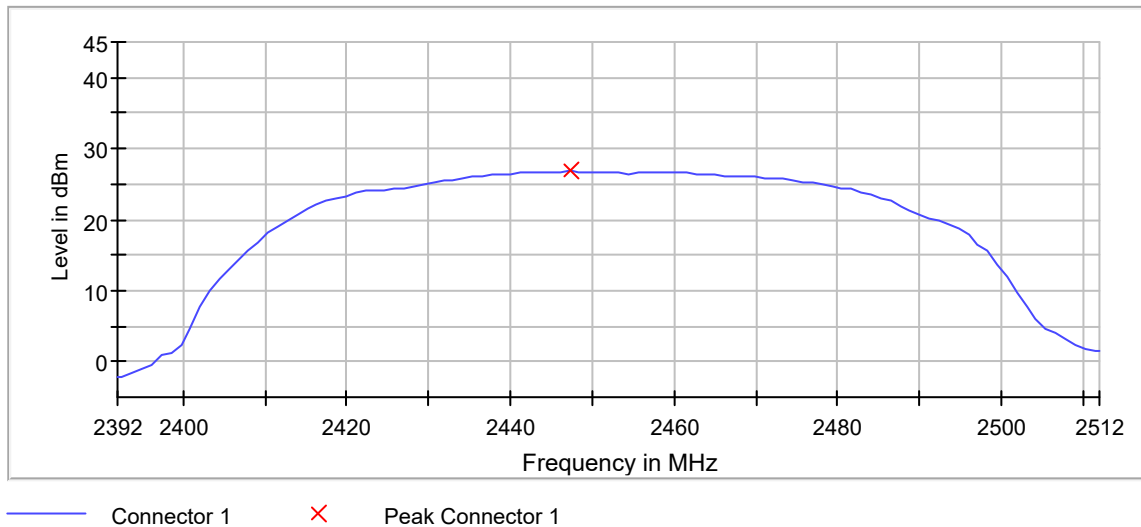

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.51200 GHz	2.51200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.400 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.32 dB	0.50 dB

Peak Power Spectral Density (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2455.475000	2.258	8.0	PASS

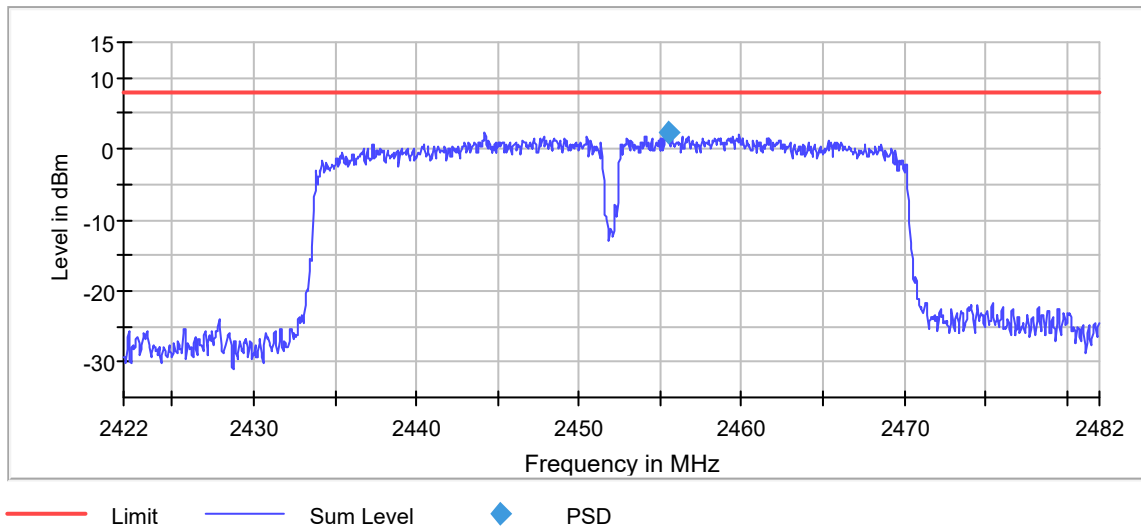

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	25 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.23 dB	0.50 dB

Occupied Channel Bandwidth 99% (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.250000	---	---	2433.875000	2470.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

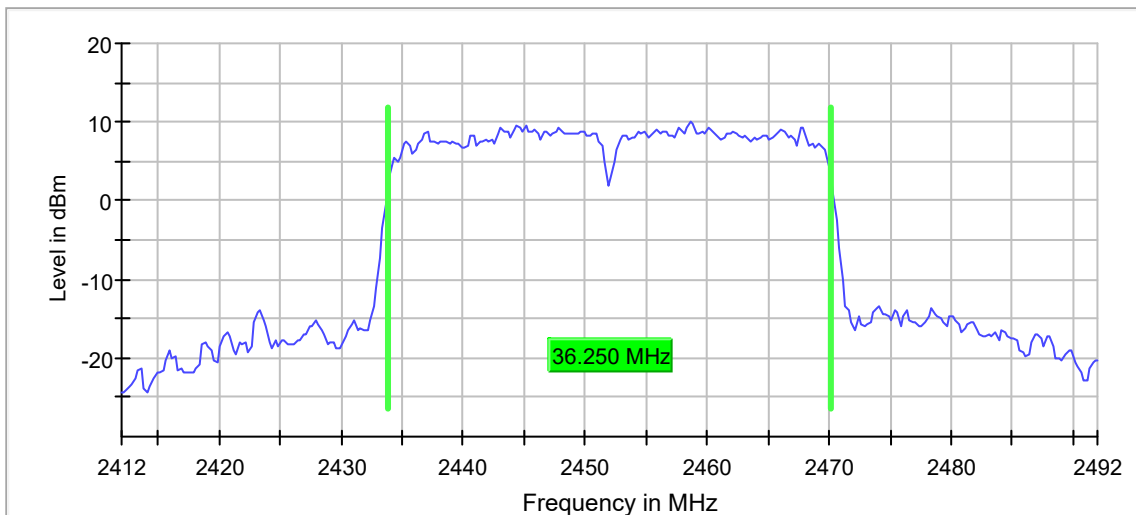

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	15 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.24 dB	0.30 dB

802.11n, 40MHz, MCS1

Minimum Emission Bandwidth 6 dB (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.450000	0.500000	---	2403.775000	2440.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2422.000000	1.5	PASS

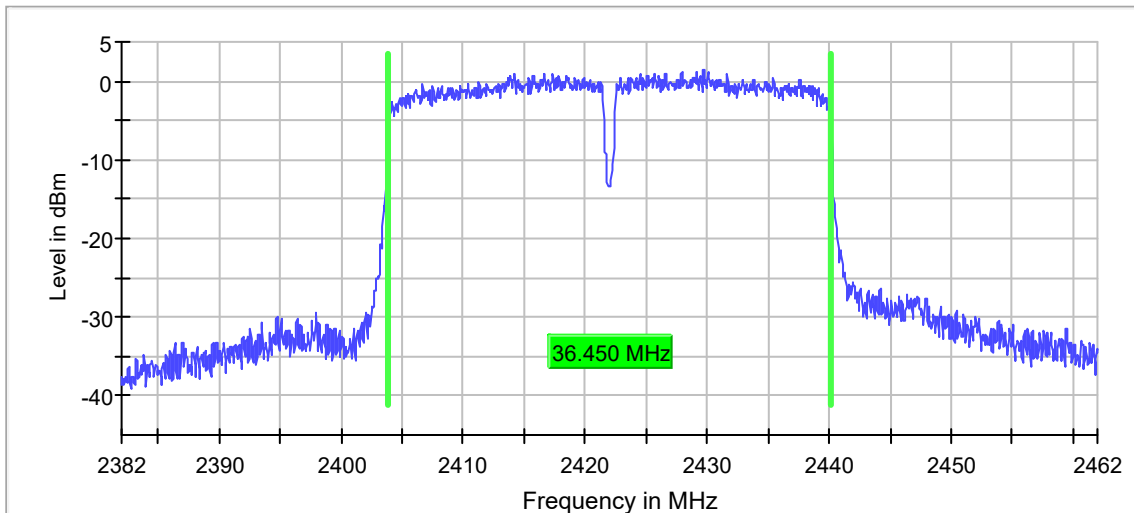

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.41 dB	0.50 dB

Peak output power (Sweep) (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	26.5	30.0	PASS

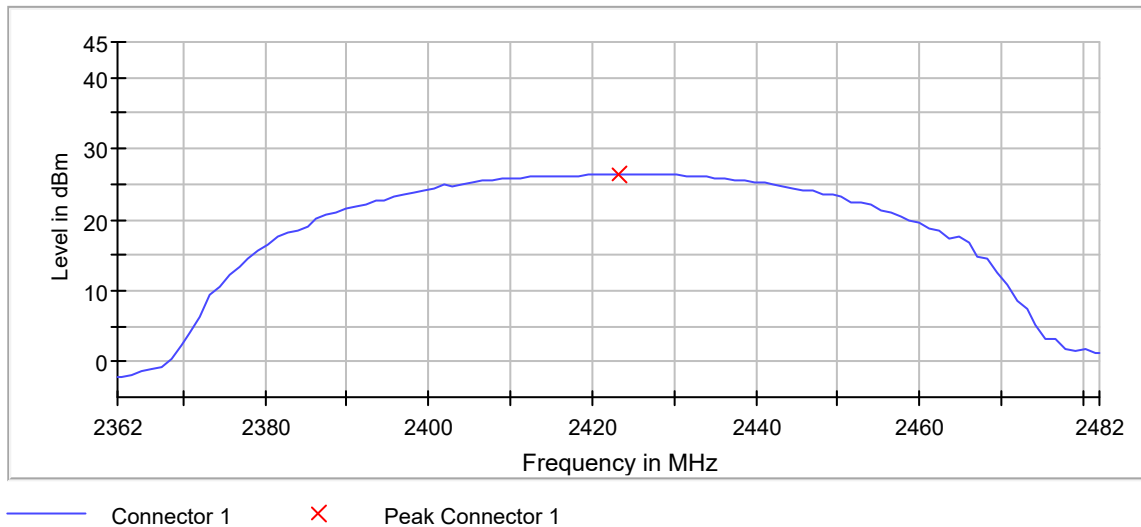

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.36200 GHz	2.36200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.450 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.50 dB

Peak Power Spectral Density (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2425.725000	1.360	8.0	PASS

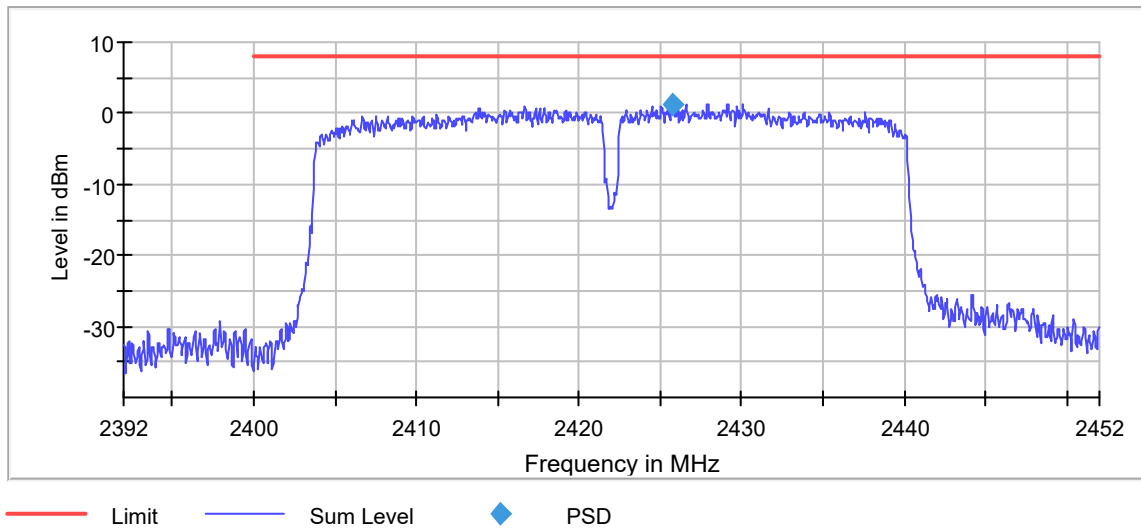

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.33 dB	0.50 dB

Occupied Channel Bandwidth 99% (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.250000	---	---	2403.875000	2440.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

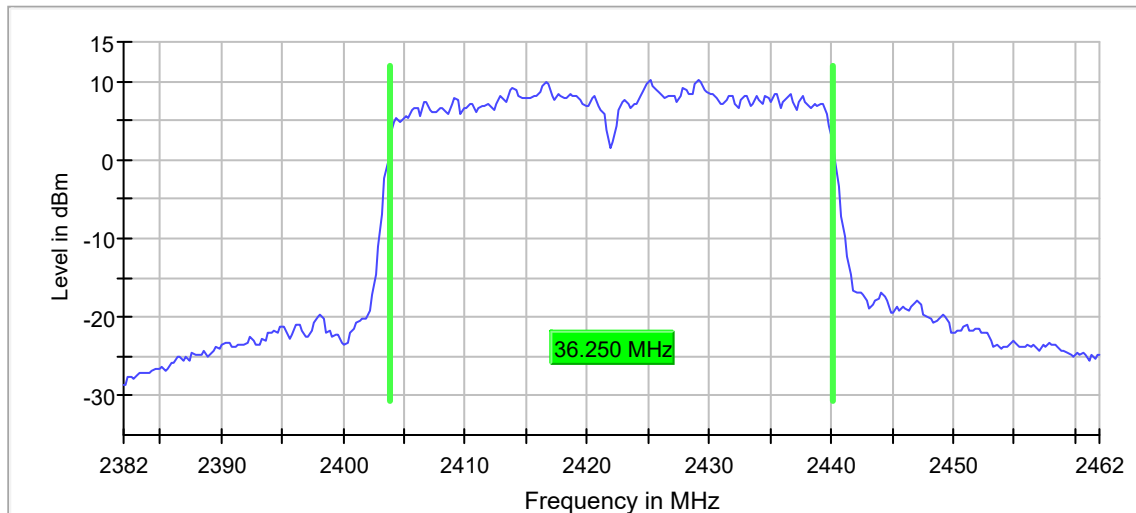

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	30 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

Band Edge low (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2422.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2429.725000	2.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2397.625000	-28.8	11.5	-17.2	PASS
2397.575000	-29.0	11.8	-17.2	PASS
2398.875000	-29.2	12.0	-17.2	PASS
2397.925000	-29.3	12.1	-17.2	PASS
2399.175000	-29.5	12.3	-17.2	PASS
2397.975000	-29.6	12.4	-17.2	PASS
2397.675000	-29.9	12.7	-17.2	PASS
2397.875000	-29.9	12.7	-17.2	PASS
2399.125000	-30.0	12.8	-17.2	PASS
2398.825000	-30.1	12.8	-17.2	PASS
2398.925000	-30.1	12.8	-17.2	PASS
2394.775000	-30.1	12.8	-17.2	PASS
2396.325000	-30.1	12.9	-17.2	PASS
2399.475000	-30.1	12.9	-17.2	PASS
2399.775000	-30.1	12.9	-17.2	PASS

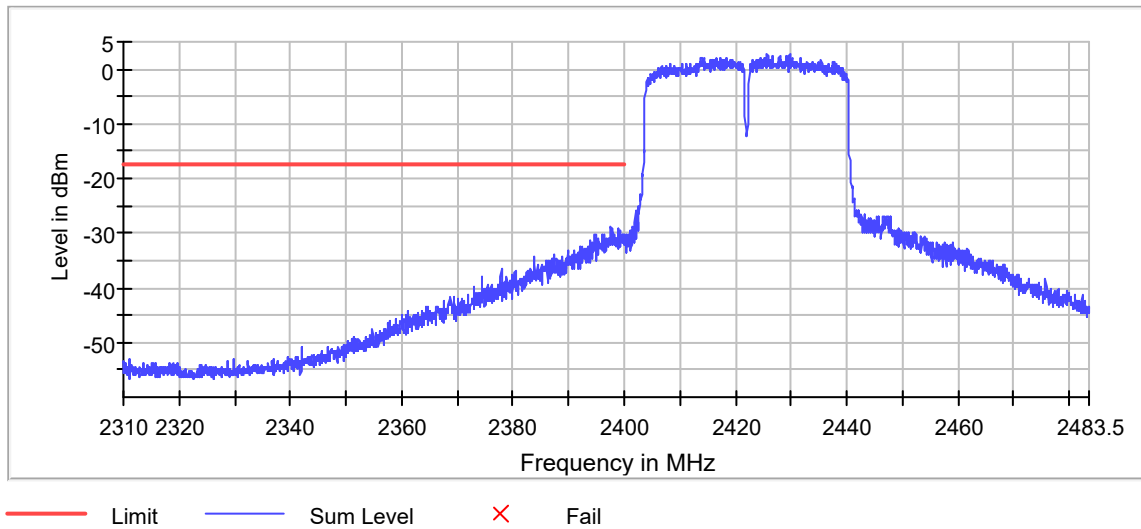

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.29 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.350000	0.500000	---	2418.875000	2455.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	2.1	PASS

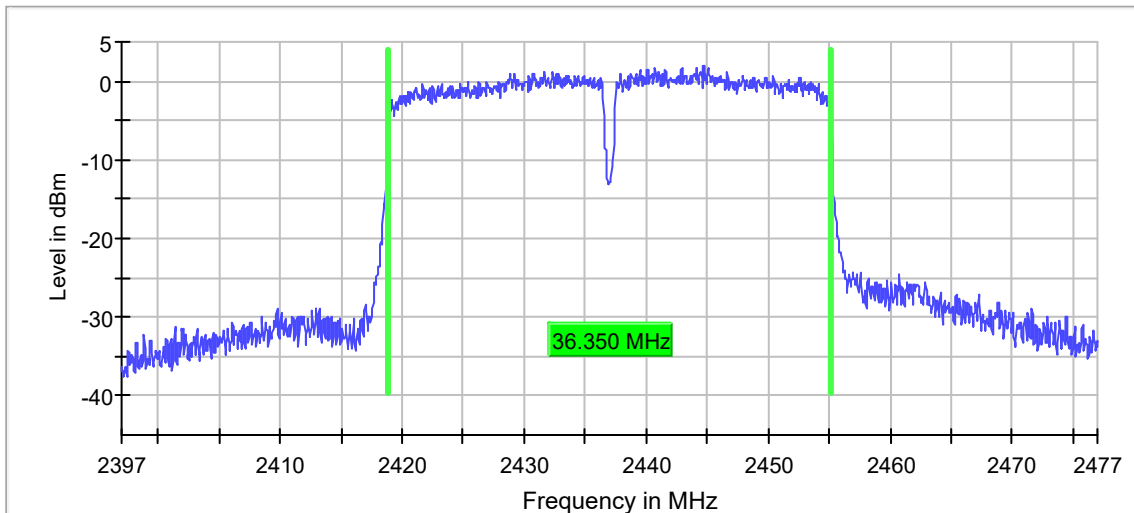

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	26 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.47 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.5	30.0	PASS

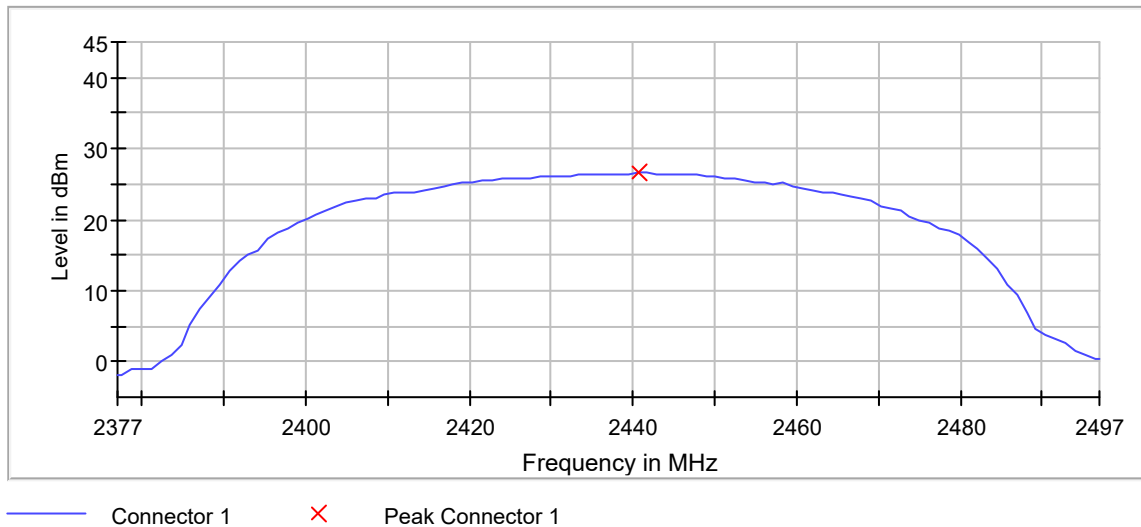

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.37700 GHz	2.37700 GHz
Stop Frequency	2.49700 GHz	2.49700 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.350 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.37 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2444.725000	2.123	8.0	PASS

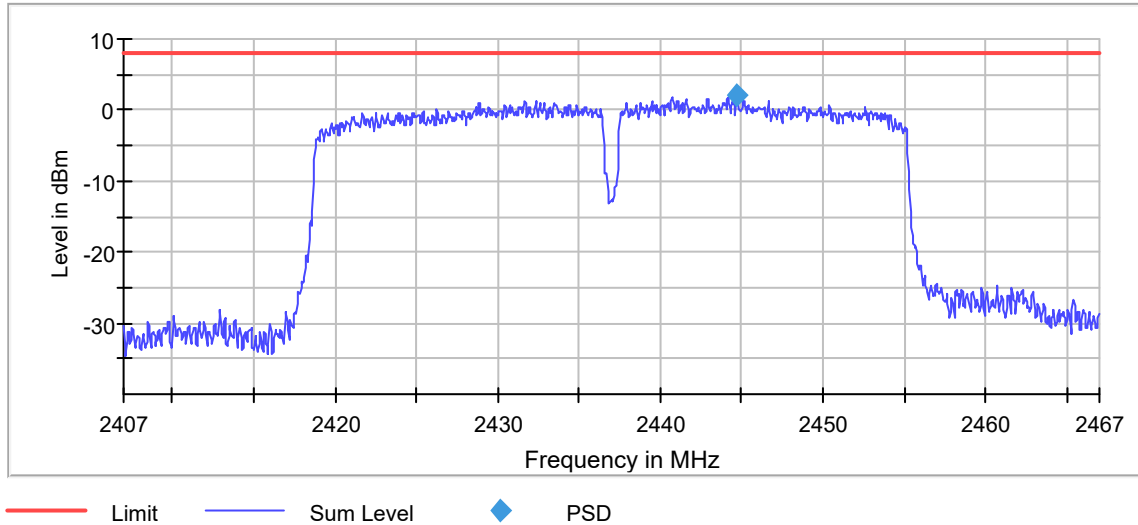

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.44 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.250000	---	---	2418.875000	2455.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

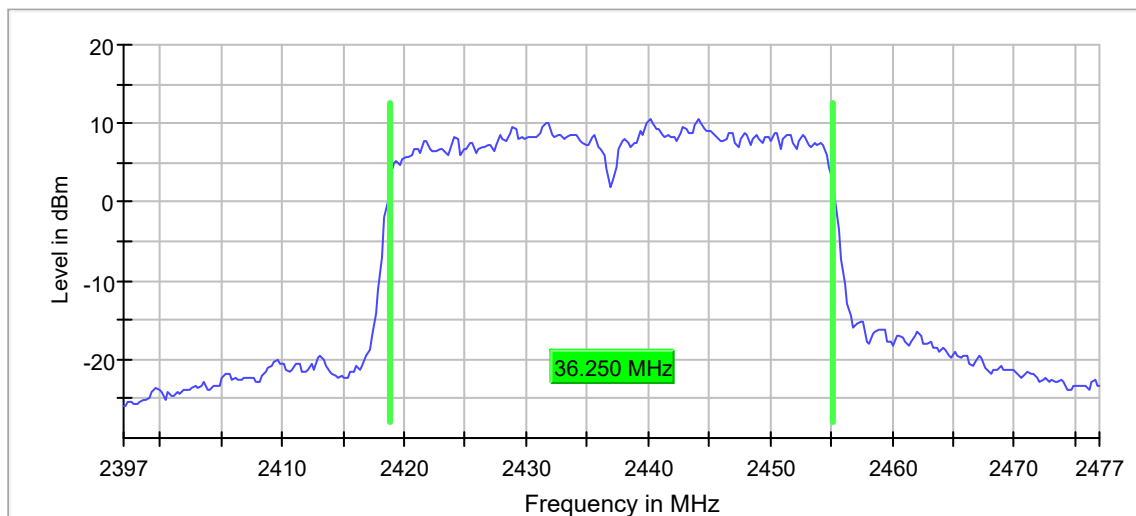

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	26 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.400000	0.500000	---	2433.825000	2470.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2452.000000	1.2	PASS

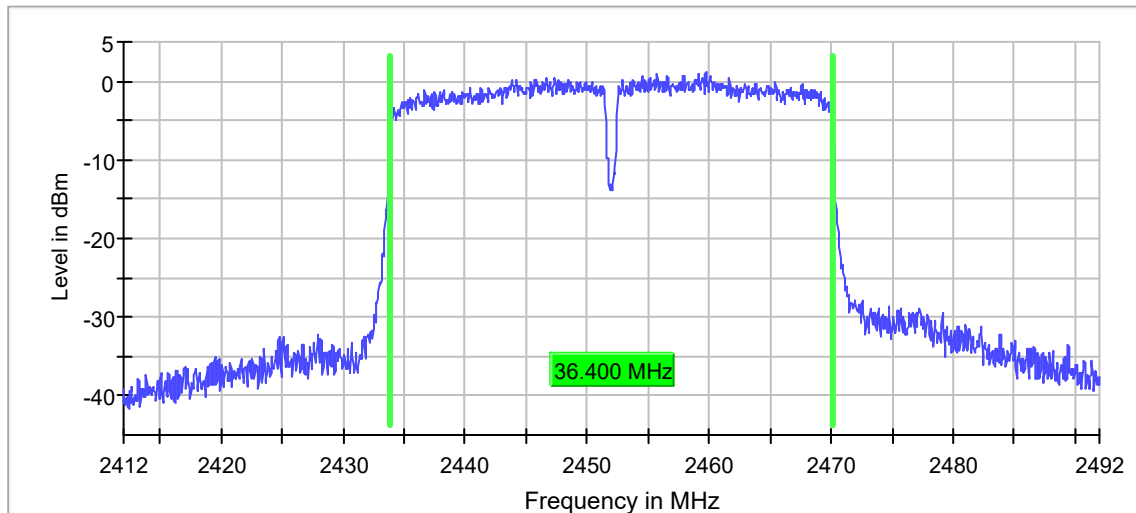

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	22 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.22 dB	0.50 dB

Peak output power (Sweep) (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2452.000000	26.3	30.0	PASS

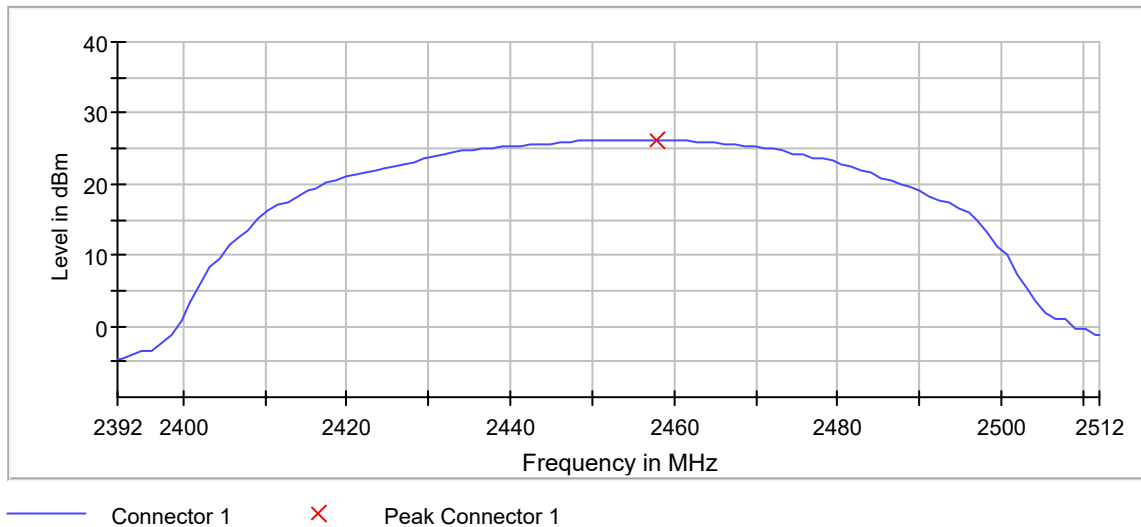

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.51200 GHz	2.51200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.400 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.50 dB

Peak Power Spectral Density (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2459.725000	1.093	8.0	PASS

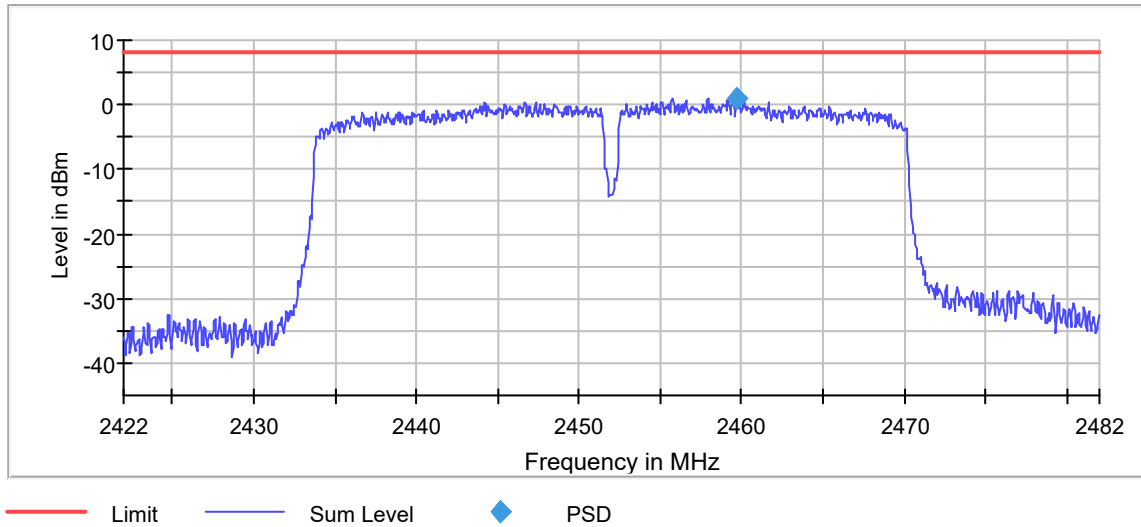

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.47 dB	0.50 dB

Occupied Channel Bandwidth 99% (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	35.750000	---	---	2434.125000	2469.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

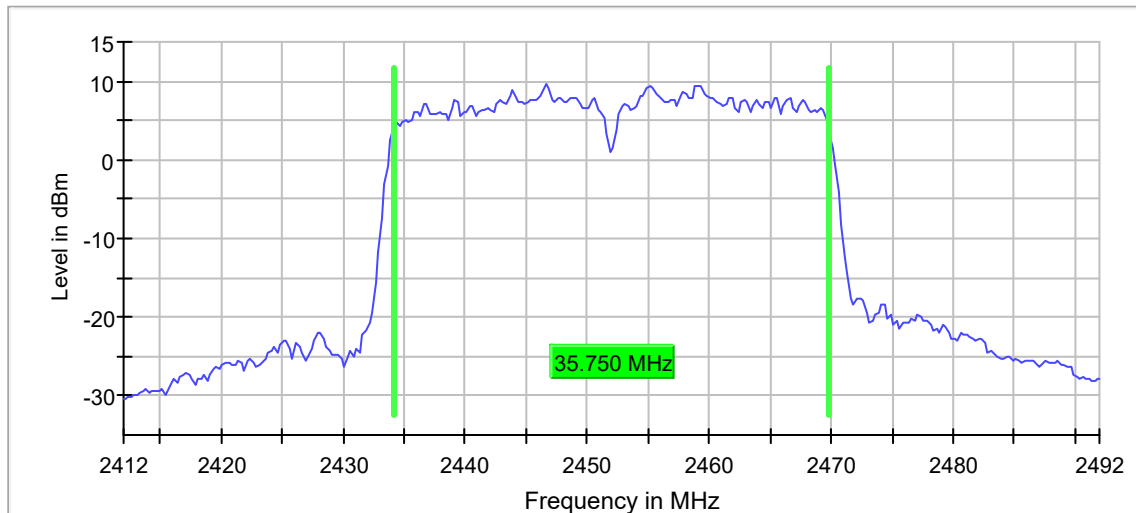

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	26 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

802.11n, 40MHz, MCS2

Minimum Emission Bandwidth 6 dB (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.450000	0.500000	---	2403.775000	2440.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2422.000000	1.4	PASS

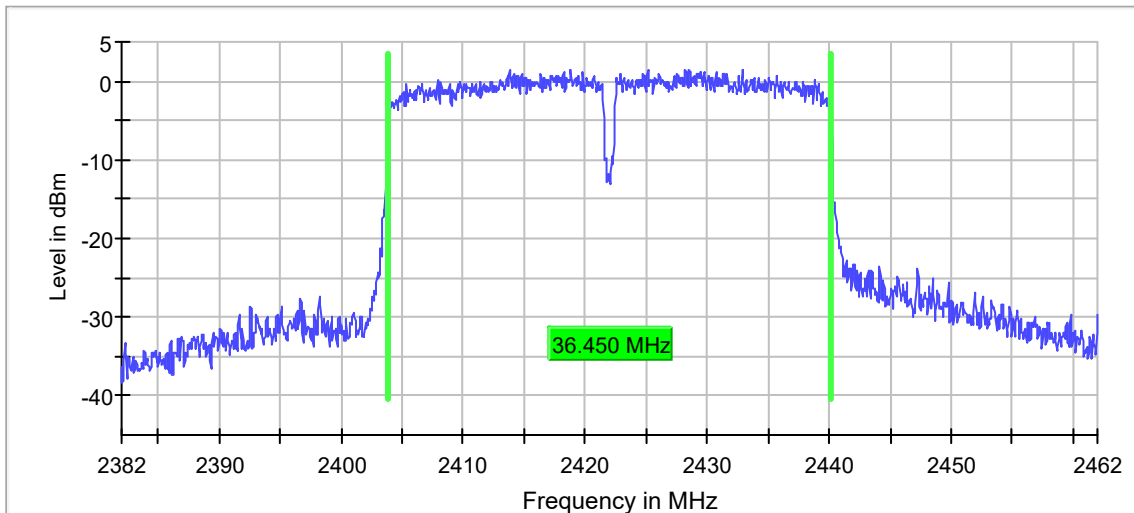

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	28 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.36 dB	0.50 dB

Peak output power (Sweep) (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	26.5	30.0	PASS

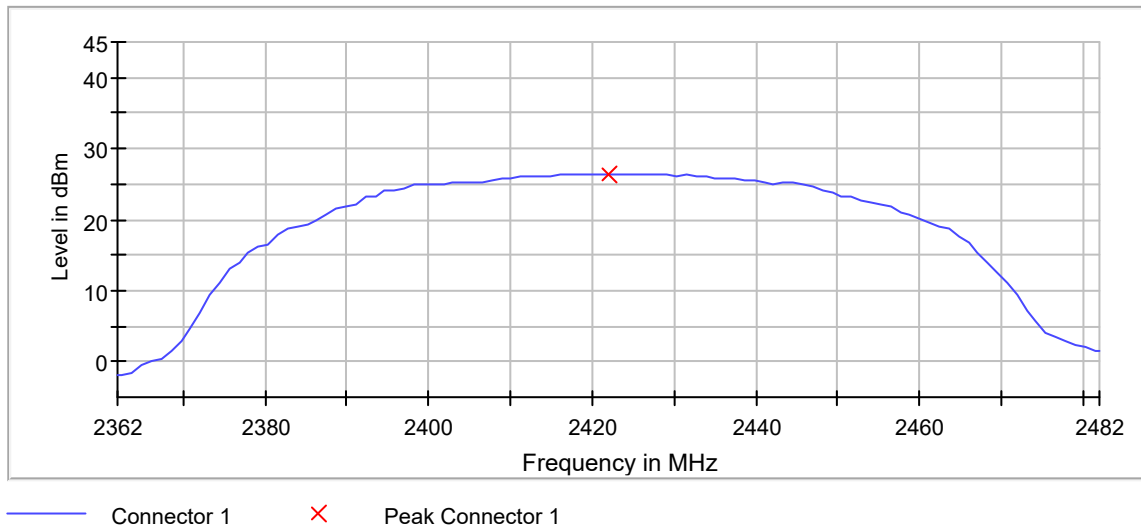

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.36200 GHz	2.36200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.450 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.50 dB

Peak Power Spectral Density (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2428.225000	1.412	8.0	PASS

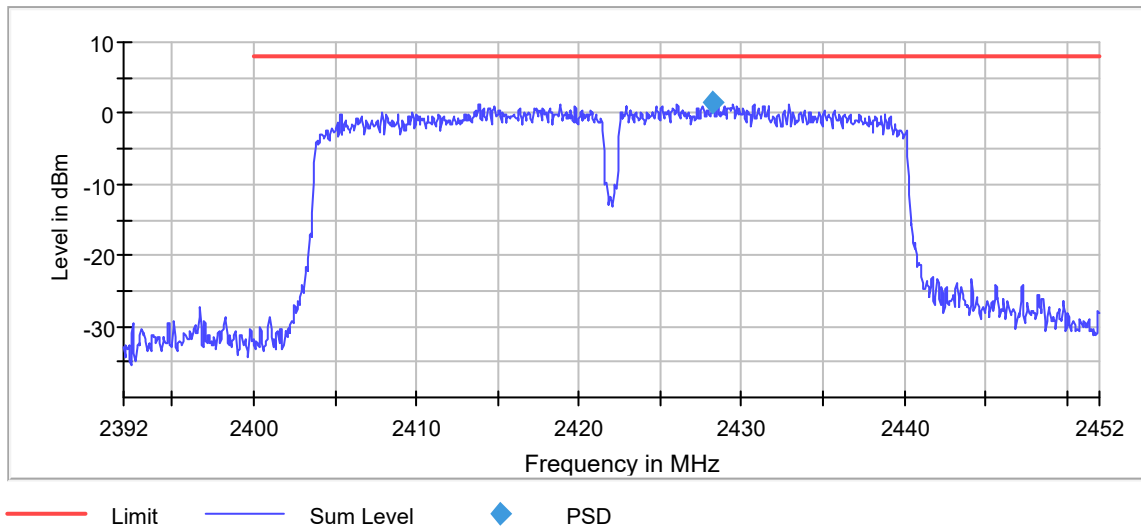

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.28 dB	0.50 dB

Occupied Channel Bandwidth 99% (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.000000	---	---	2404.125000	2440.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

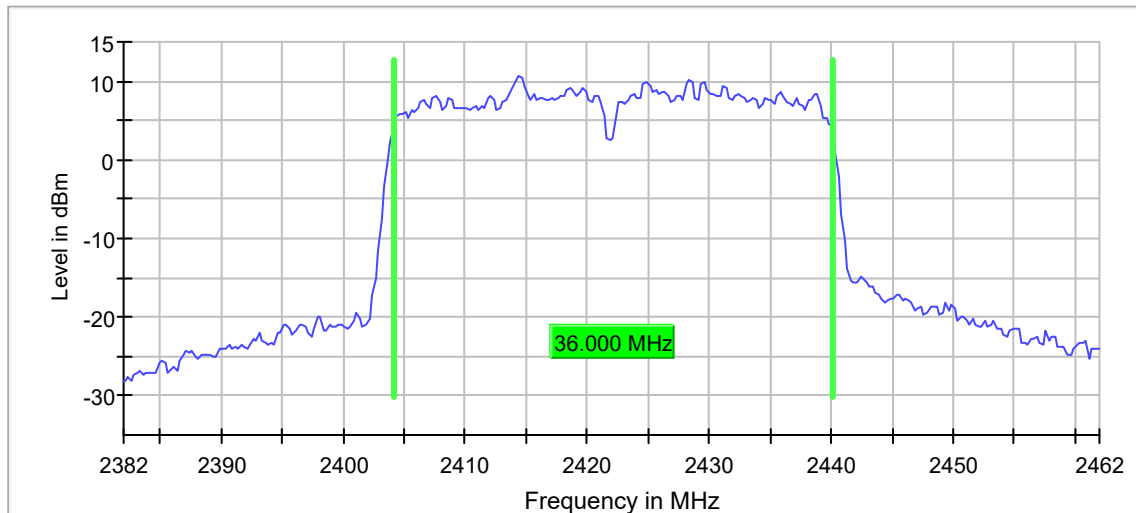

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	28 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.25 dB	0.30 dB

Band Edge low (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2422.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2418.825000	2.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.225000	-26.2	8.6	-17.6	PASS
2398.275000	-26.4	8.9	-17.6	PASS
2398.175000	-27.1	9.5	-17.6	PASS
2396.675000	-27.3	9.7	-17.6	PASS
2396.725000	-27.7	10.1	-17.6	PASS
2396.625000	-27.8	10.2	-17.6	PASS
2398.325000	-27.8	10.2	-17.6	PASS
2396.975000	-28.7	11.2	-17.6	PASS
2399.225000	-28.8	11.2	-17.6	PASS
2396.925000	-28.8	11.2	-17.6	PASS
2397.025000	-28.9	11.3	-17.6	PASS
2398.875000	-28.9	11.4	-17.6	PASS
2398.925000	-28.9	11.4	-17.6	PASS
2397.875000	-29.1	11.5	-17.6	PASS
2397.825000	-29.1	11.6	-17.6	PASS

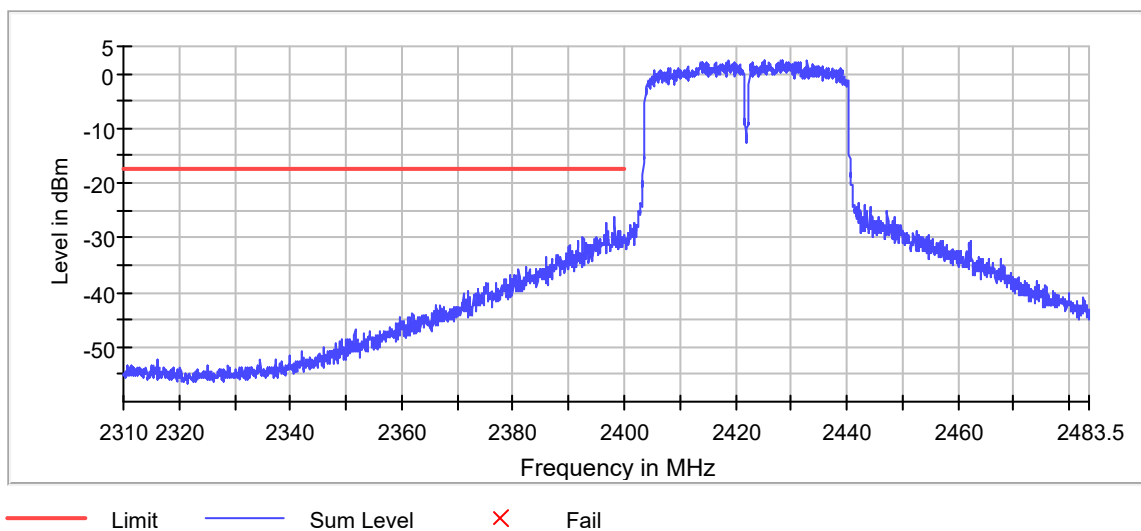

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	34 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.450000	0.500000	---	2418.775000	2455.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	1.3	PASS

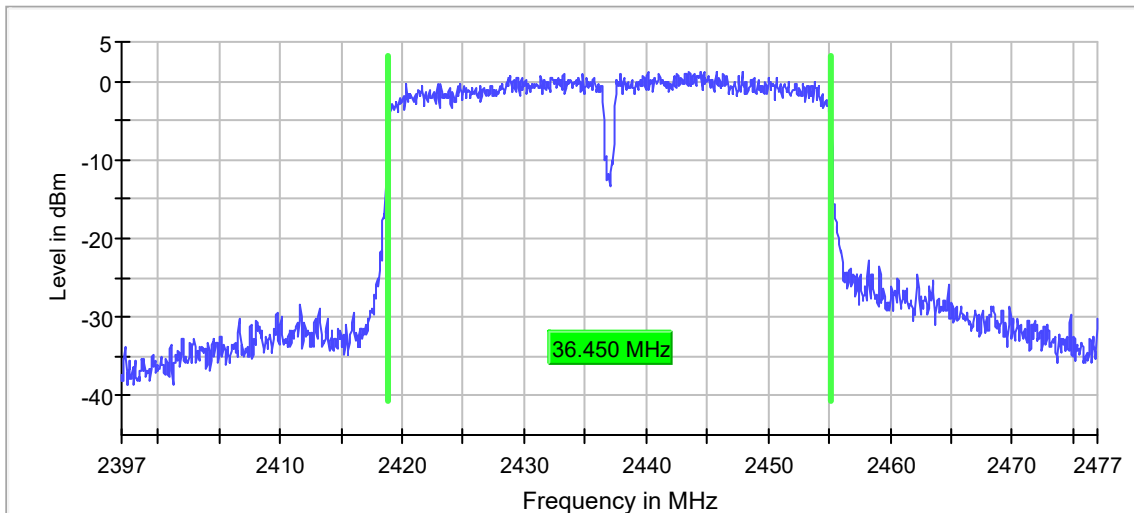

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.21 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.4	30.0	PASS

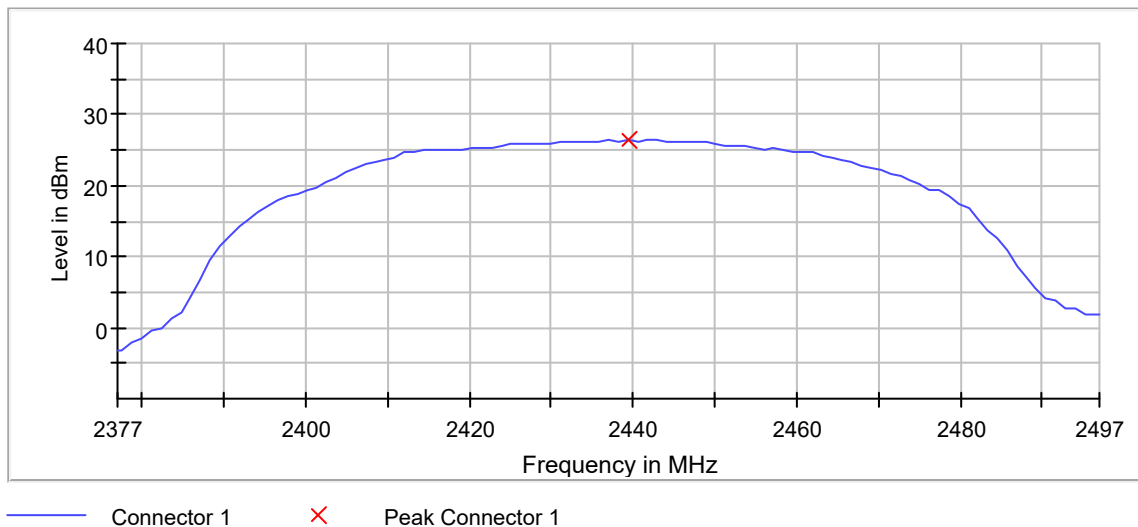

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.37700 GHz	2.37700 GHz
Stop Frequency	2.49700 GHz	2.49700 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.450 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2443.525000	1.459	8.0	PASS

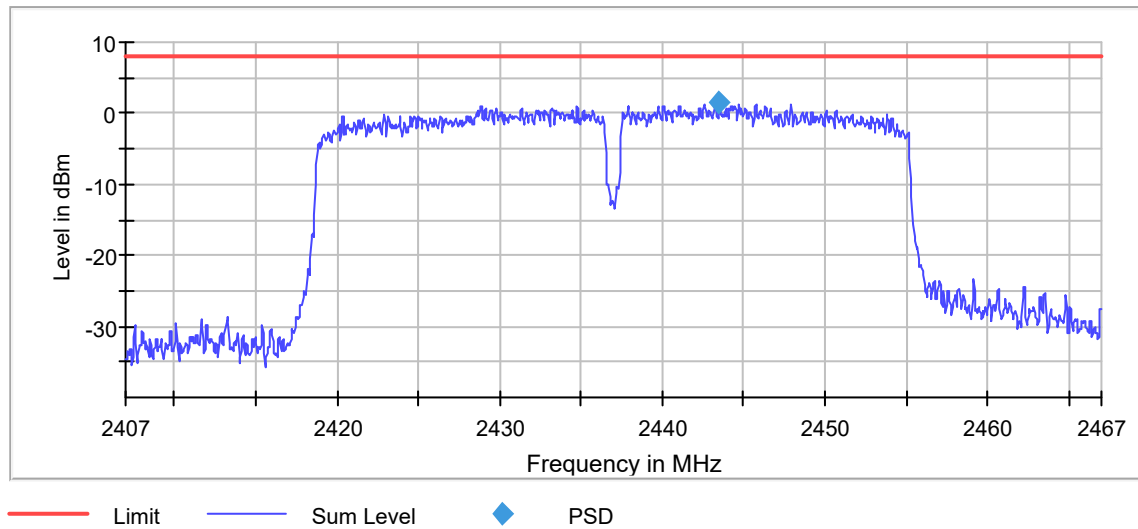

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.35 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.000000	---	---	2419.125000	2455.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

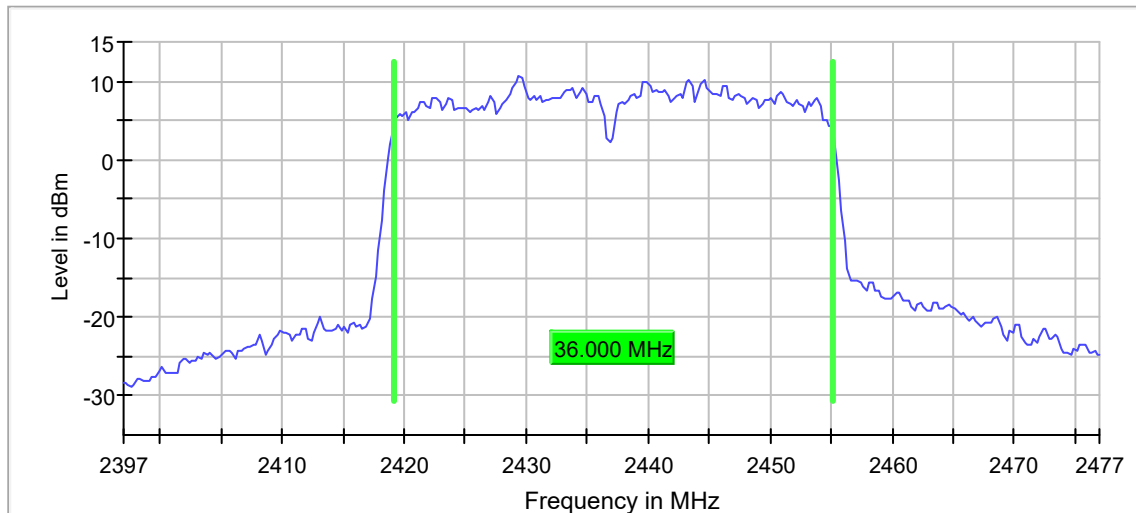

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	27 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.450000	0.500000	---	2433.775000	2470.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2452.000000	0.9	PASS

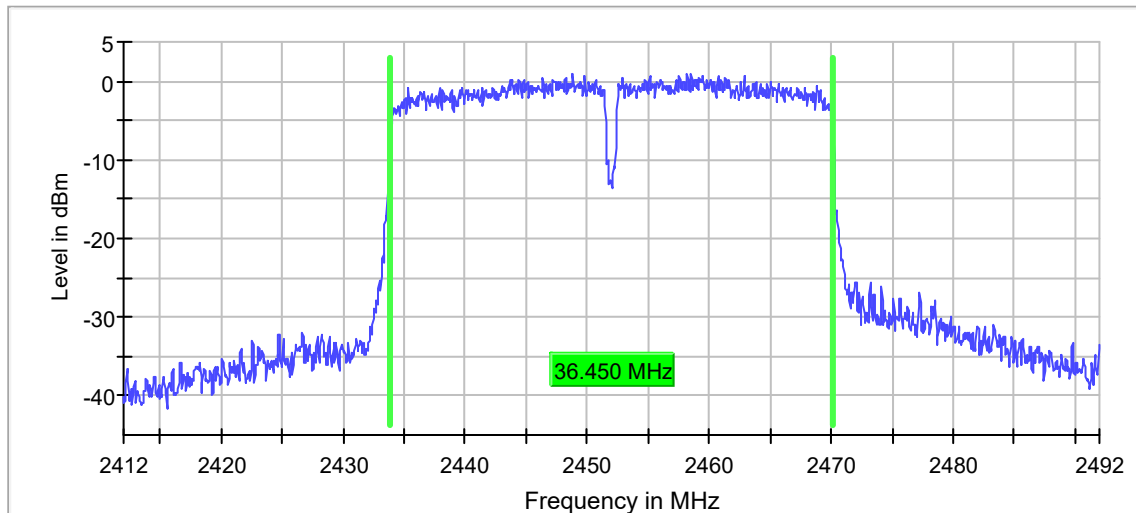

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	22 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.15 dB	0.50 dB

Peak output power (Sweep) (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2452.000000	26.0	30.0	PASS

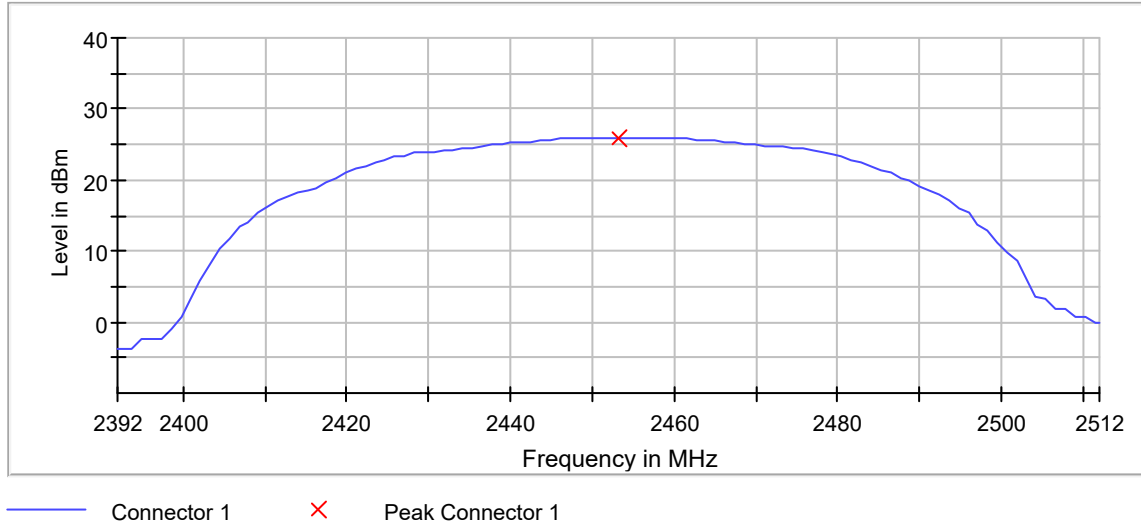

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.51200 GHz	2.51200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.450 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.27 dB	0.50 dB

Peak Power Spectral Density (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2458.525000	0.815	8.0	PASS

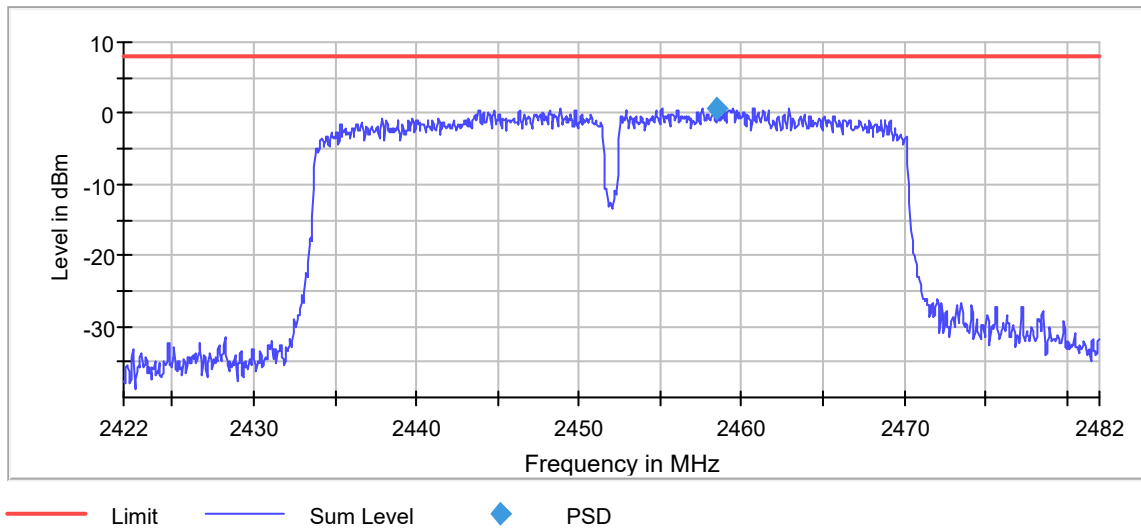

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.42 dB	0.50 dB

Occupied Channel Bandwidth 99% (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.000000	---	---	2434.125000	2470.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

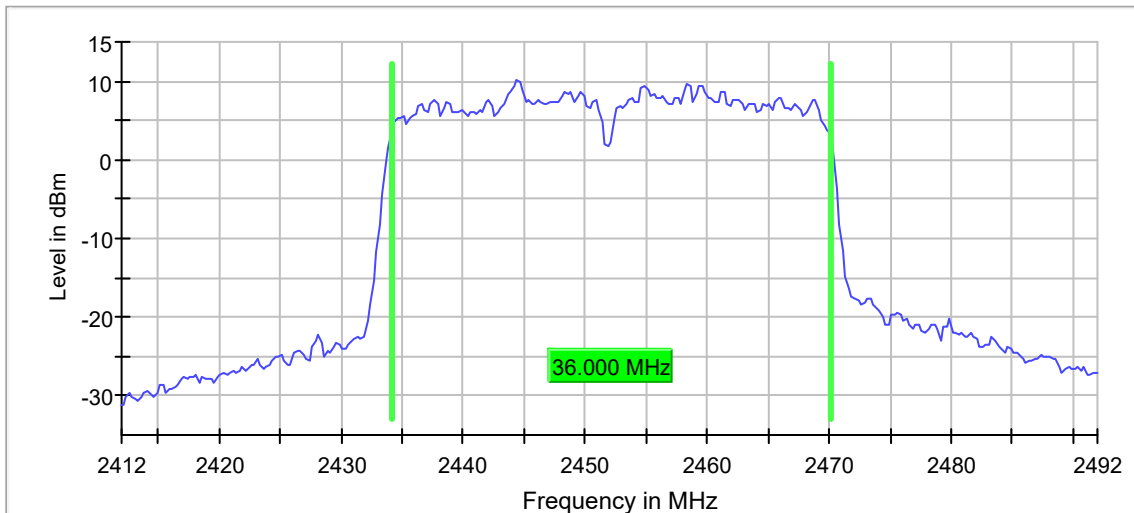

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	31 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

802.11n, 40MHz, MCS3

Minimum Emission Bandwidth 6 dB (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.450000	0.500000	---	2403.825000	2440.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2422.000000	1.2	PASS

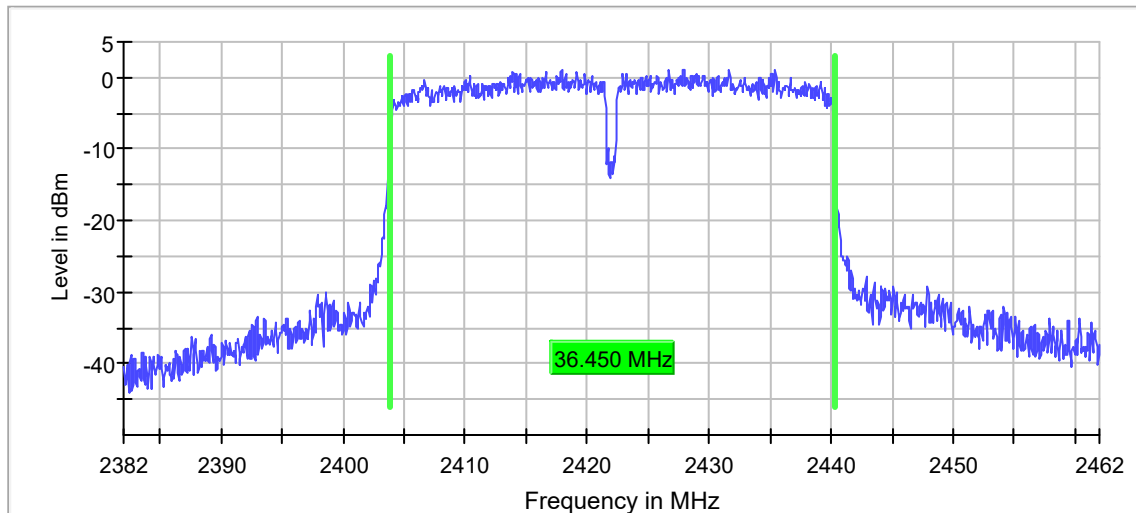

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	22 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.31 dB	0.50 dB

Peak output power (Sweep) (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	26.1	30.0	PASS

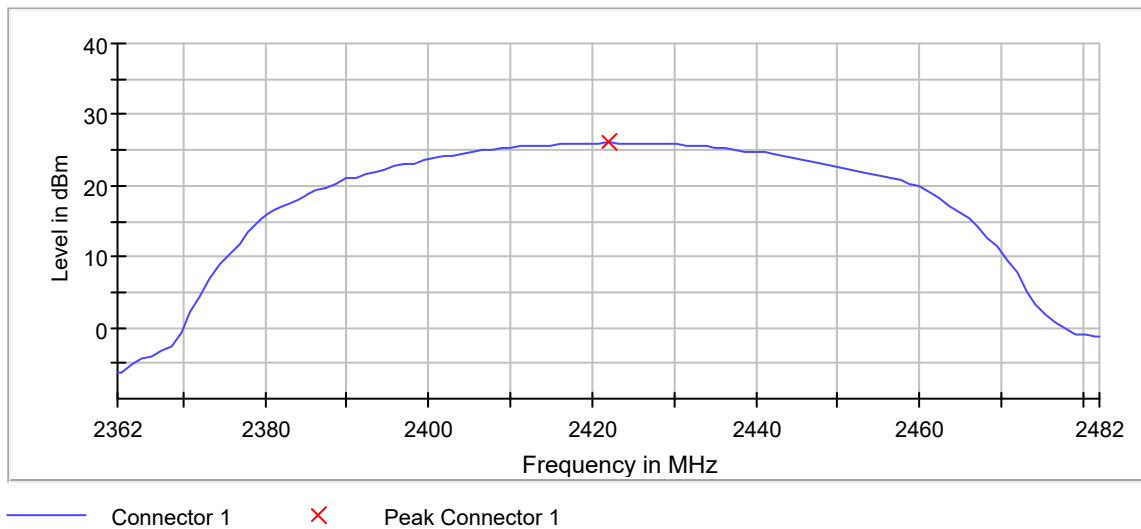

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.36200 GHz	2.36200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.450 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.50 dB

Peak Power Spectral Density (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2427.925000	1.224	8.0	PASS

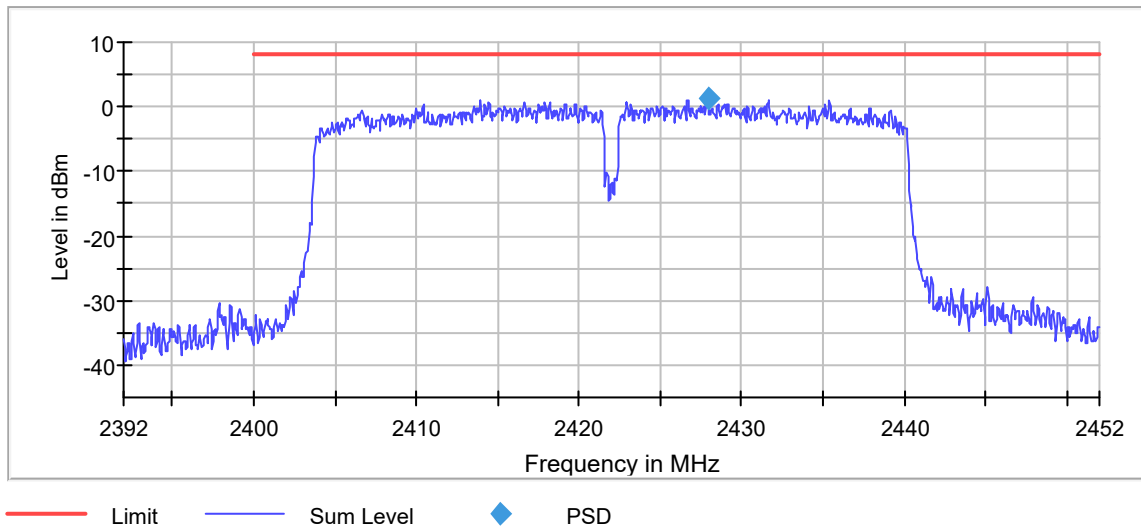

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.37 dB	0.50 dB

Occupied Channel Bandwidth 99% (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.000000	---	---	2404.125000	2440.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

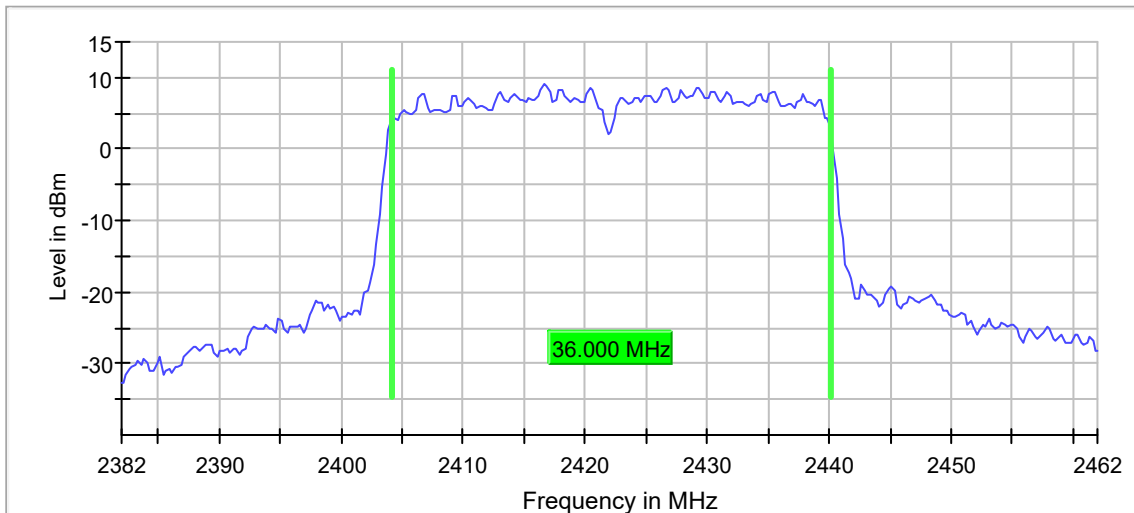

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	20 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.30 dB

Band Edge low (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2422.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2435.425000	2.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.575000	-28.1	10.2	-17.9	PASS
2398.525000	-28.5	10.5	-17.9	PASS
2397.875000	-28.7	10.8	-17.9	PASS
2398.625000	-28.7	10.8	-17.9	PASS
2397.925000	-28.8	10.9	-17.9	PASS
2398.225000	-30.2	12.2	-17.9	PASS
2399.175000	-30.2	12.3	-17.9	PASS
2397.825000	-30.3	12.3	-17.9	PASS
2398.175000	-30.3	12.4	-17.9	PASS
2398.825000	-30.4	12.5	-17.9	PASS
2399.225000	-30.6	12.6	-17.9	PASS
2398.875000	-30.7	12.8	-17.9	PASS
2399.125000	-31.0	13.1	-17.9	PASS
2397.275000	-31.2	13.2	-17.9	PASS
2397.975000	-31.3	13.4	-17.9	PASS

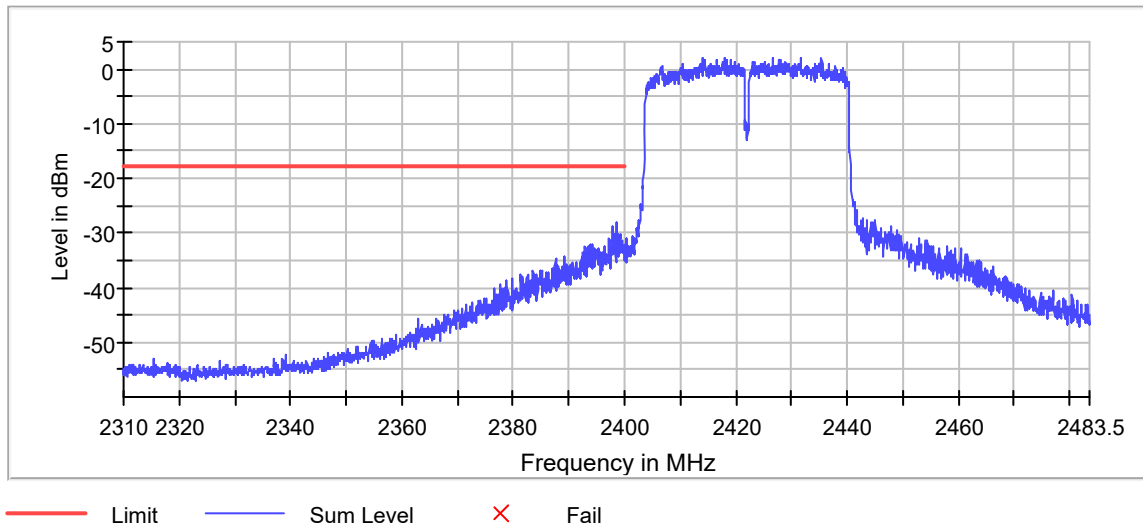

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	33 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.34 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.450000	0.500000	---	2418.825000	2455.275000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	1.2	PASS

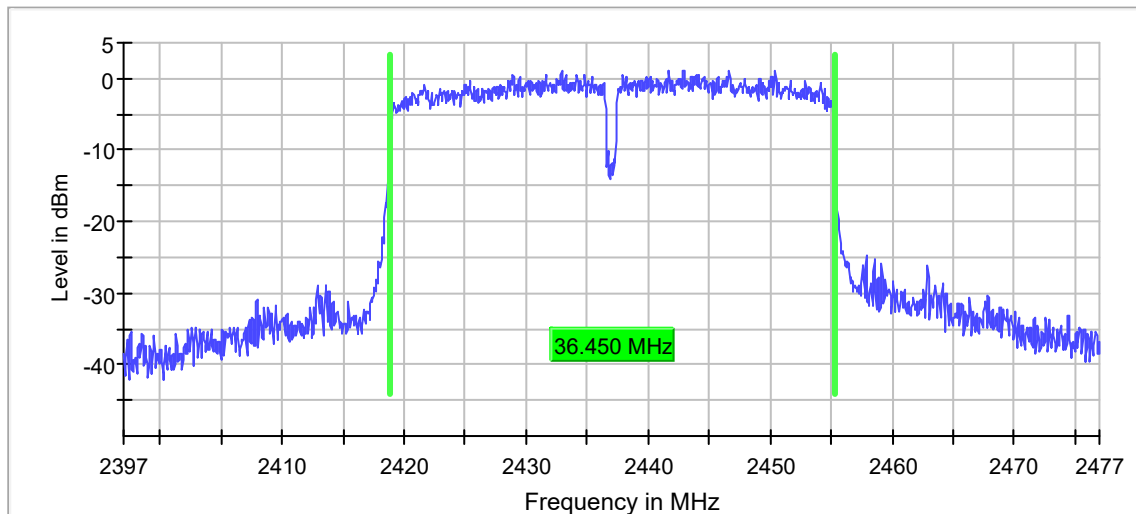

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	27 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.2	30.0	PASS

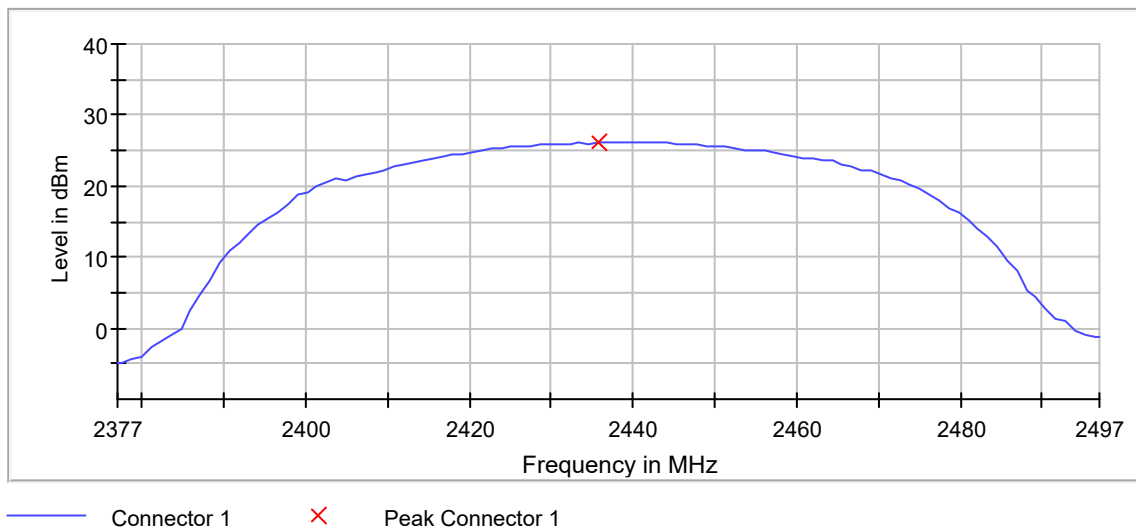

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.37700 GHz	2.37700 GHz
Stop Frequency	2.49700 GHz	2.49700 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.450 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2441.675000	1.161	8.0	PASS

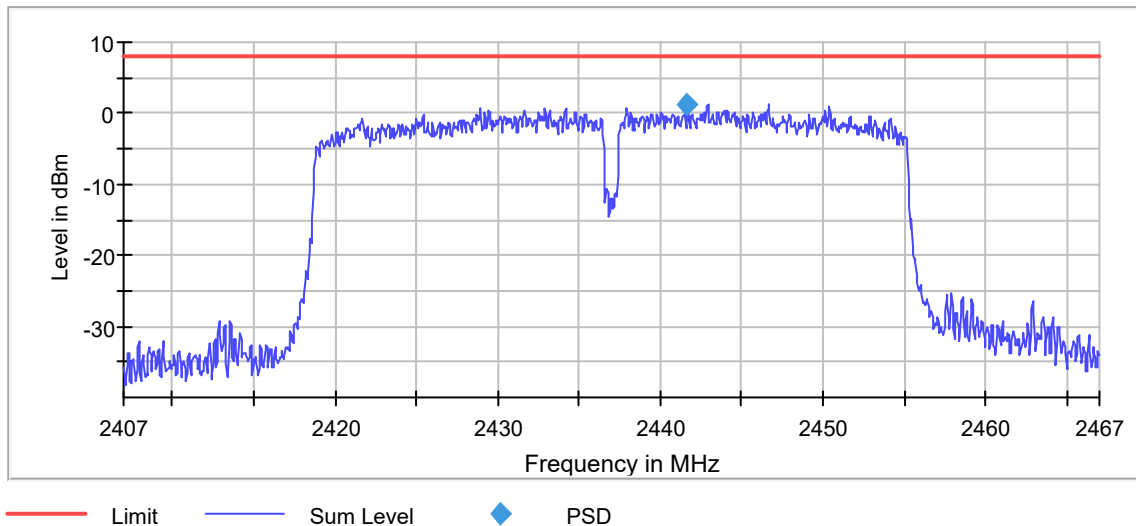

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	20.000 dBm	10.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.39 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.250000	---	---	2418.875000	2455.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

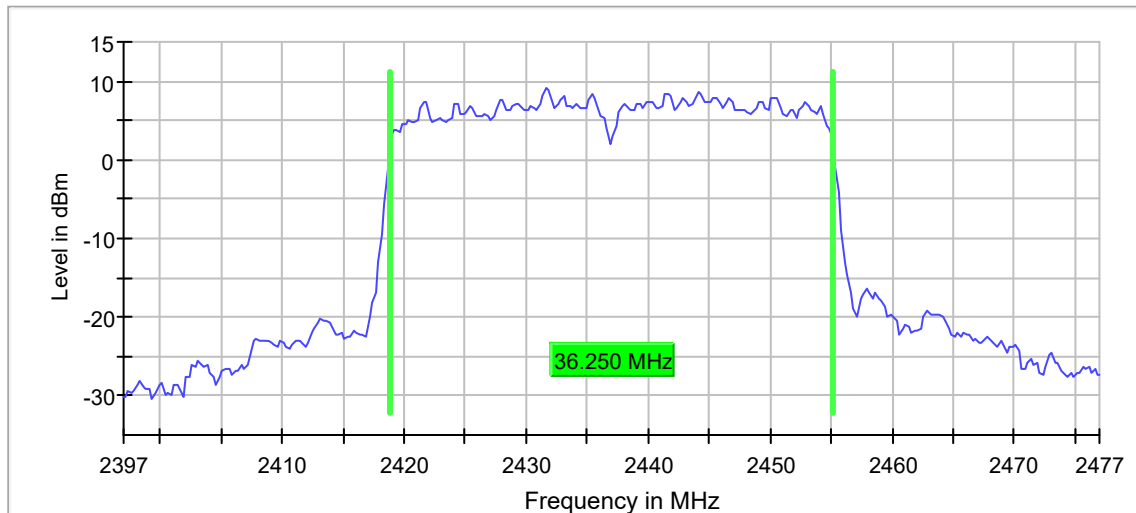

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.400000	0.500000	---	2433.825000	2470.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2452.000000	0.9	PASS

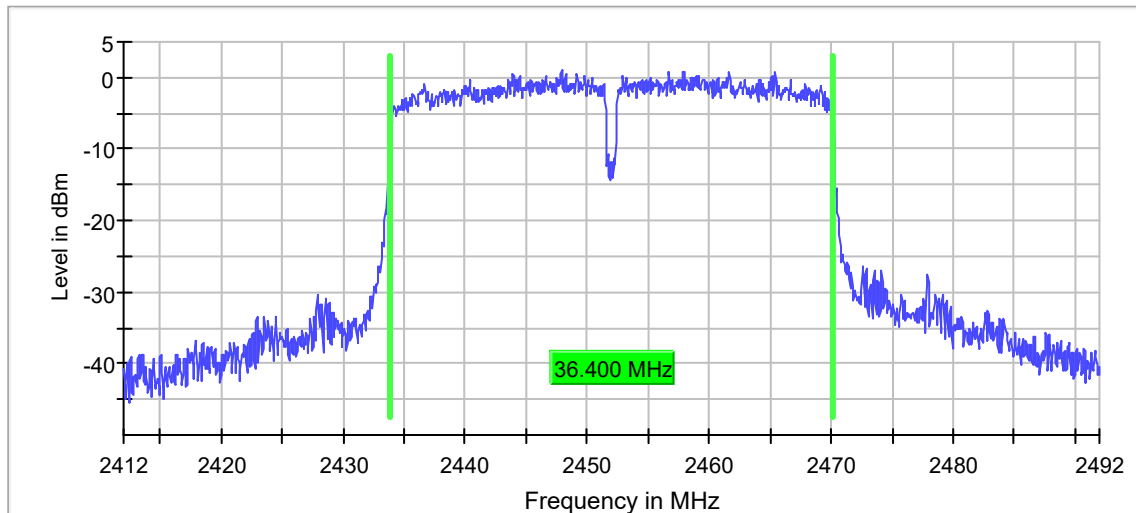

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	20 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.39 dB	0.50 dB

Peak output power (Sweep) (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2452.000000	25.9	30.0	PASS

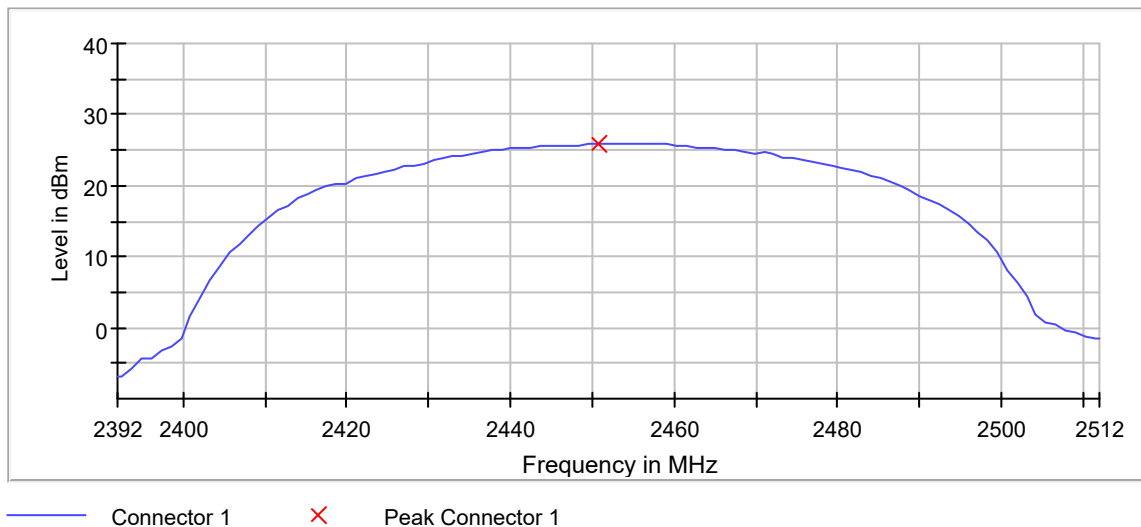

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.51200 GHz	2.51200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.400 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.31 dB	0.50 dB

Peak Power Spectral Density (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2461.675000	0.888	8.0	PASS

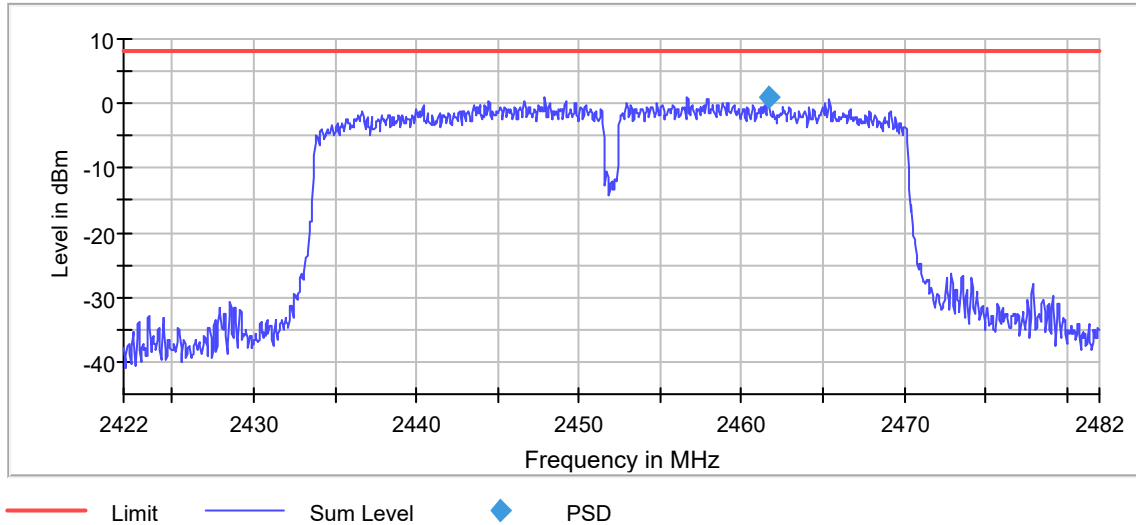

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.41 dB	0.50 dB

Occupied Channel Bandwidth 99% (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.000000	---	---	2434.125000	2470.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

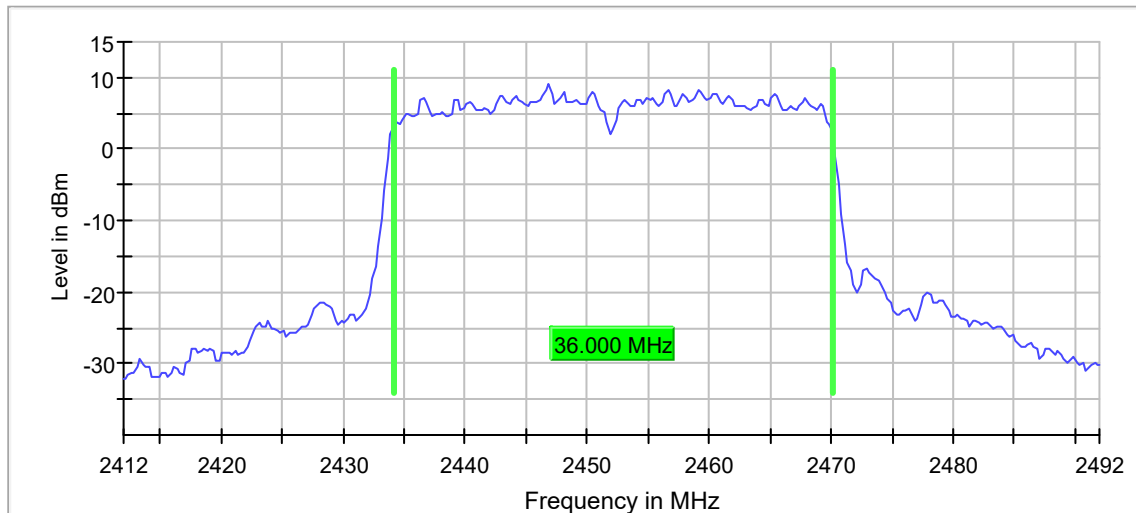

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	22 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

802.11n, 40MHz, MCS4

Minimum Emission Bandwidth 6 dB (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.450000	0.500000	---	2403.775000	2440.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2422.000000	1.6	PASS

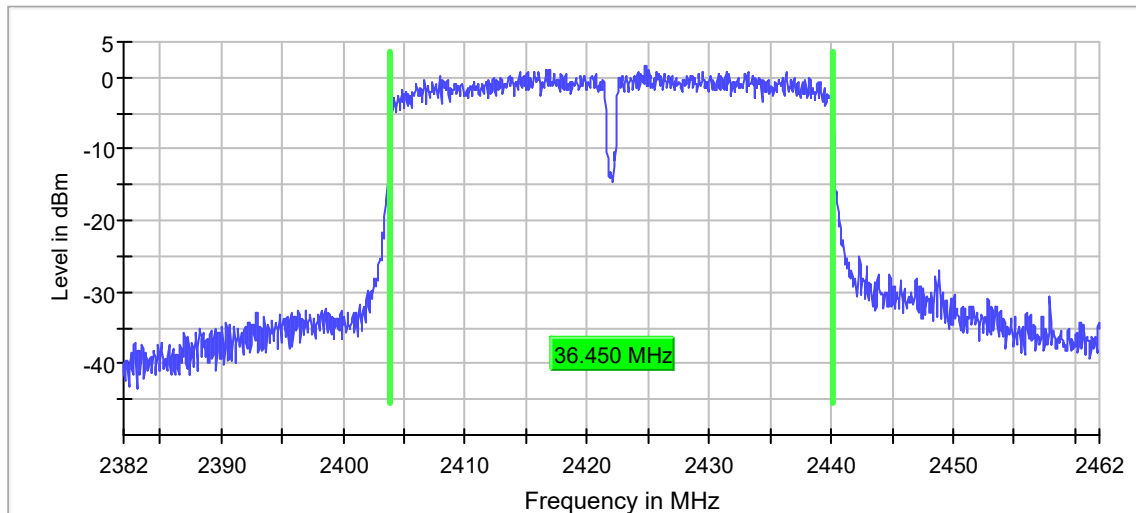

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	33 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.41 dB	0.50 dB

Peak output power (Sweep) (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	26.4	30.0	PASS

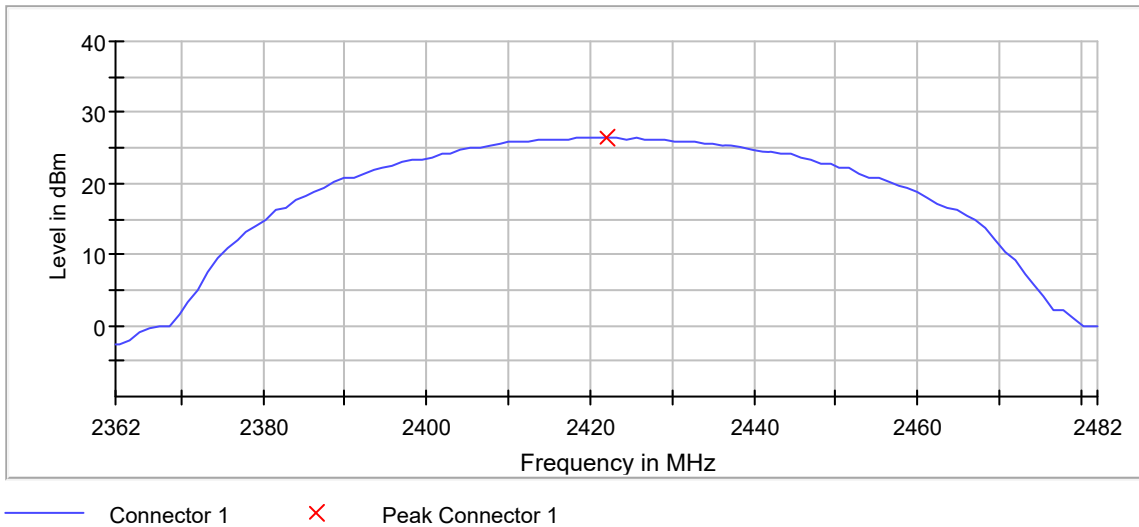

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.36200 GHz	2.36200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	≥ 36.450 MHz
VBW	80.000 MHz	≥ 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.29 dB	0.50 dB

Peak Power Spectral Density (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2424.775000	1.149	8.0	PASS

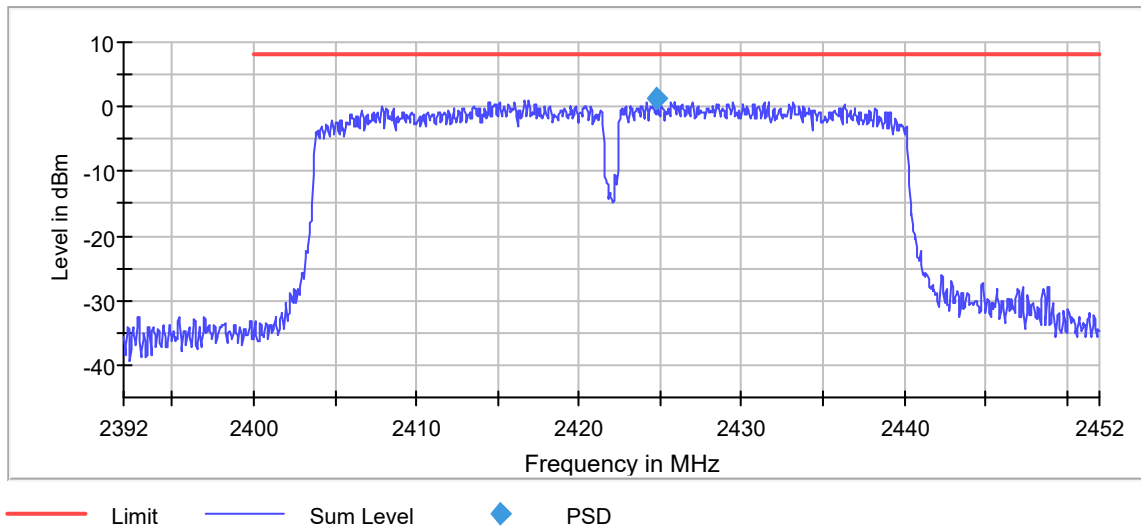

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.46 dB	0.50 dB

Occupied Channel Bandwidth 99% (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.250000	---	---	2403.875000	2440.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

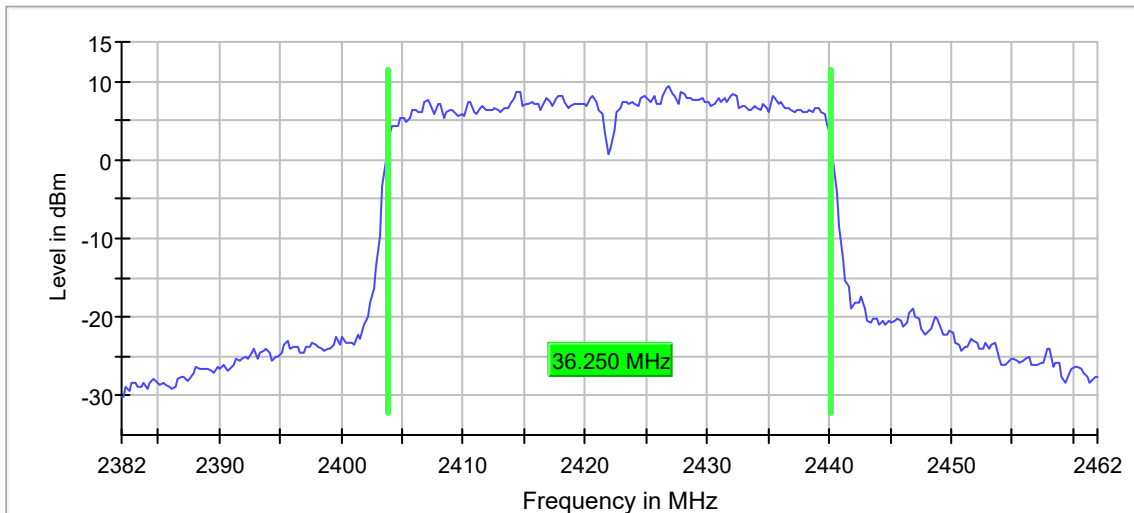

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	20 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Band Edge low (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2422.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2424.775000	2.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-31.7	13.8	-17.9	PASS
2396.325000	-31.8	13.9	-17.9	PASS
2399.825000	-31.9	14.0	-17.9	PASS
2399.475000	-31.9	14.0	-17.9	PASS
2396.375000	-32.0	14.1	-17.9	PASS
2399.525000	-32.0	14.1	-17.9	PASS
2399.175000	-32.1	14.2	-17.9	PASS
2397.275000	-32.3	14.4	-17.9	PASS
2399.125000	-32.4	14.5	-17.9	PASS
2398.275000	-32.4	14.5	-17.9	PASS
2396.275000	-32.4	14.5	-17.9	PASS
2397.325000	-32.5	14.6	-17.9	PASS
2393.575000	-32.5	14.6	-17.9	PASS
2398.225000	-32.6	14.7	-17.9	PASS
2398.325000	-32.6	14.7	-17.9	PASS

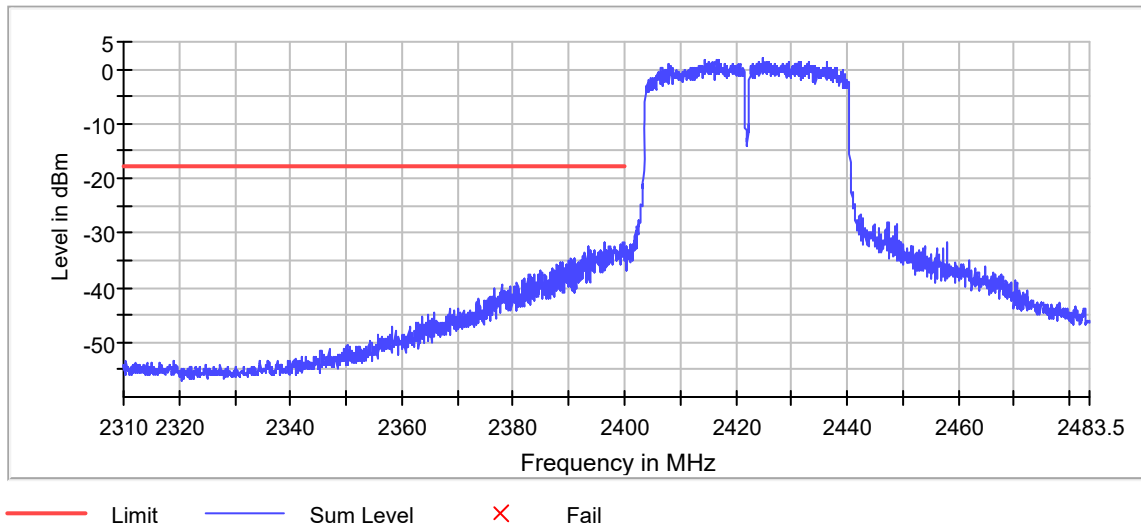

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	35 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.33 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.500000	0.500000	---	2418.725000	2455.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	1.0	PASS

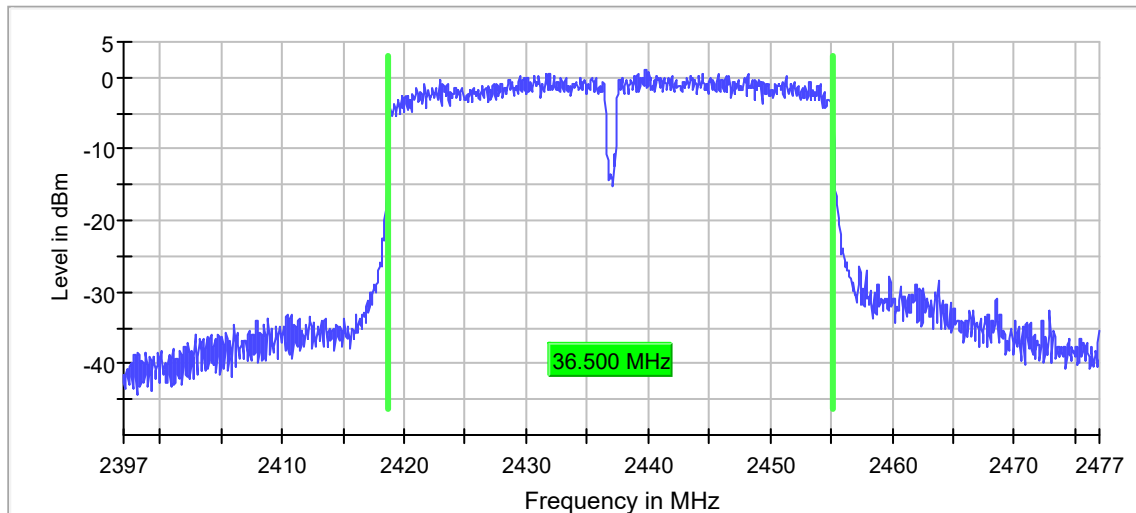

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.29 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	26.3	30.0	PASS

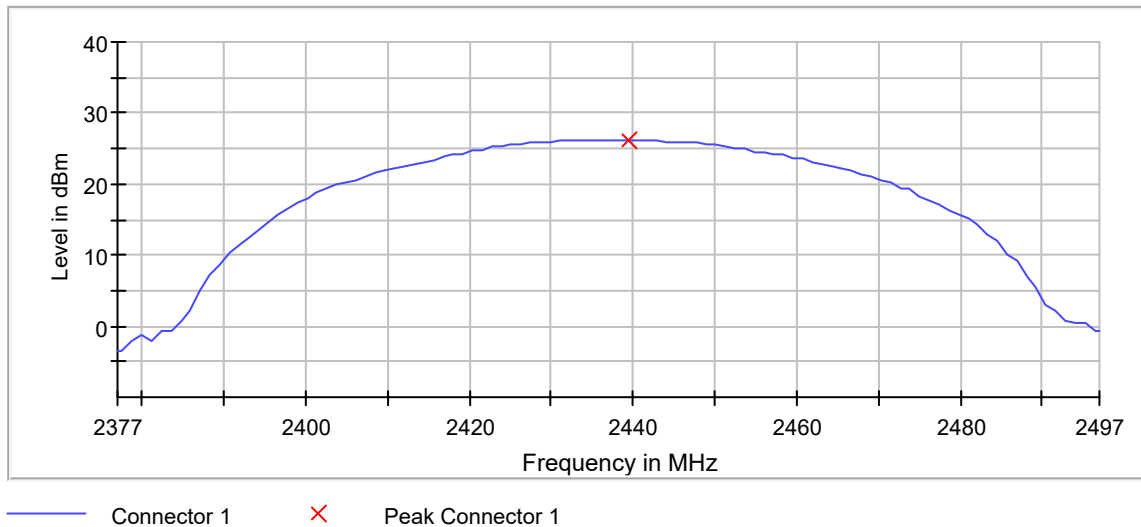

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.37700 GHz	2.37700 GHz
Stop Frequency	2.49700 GHz	2.49700 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.500 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2439.775000	1.167	8.0	PASS

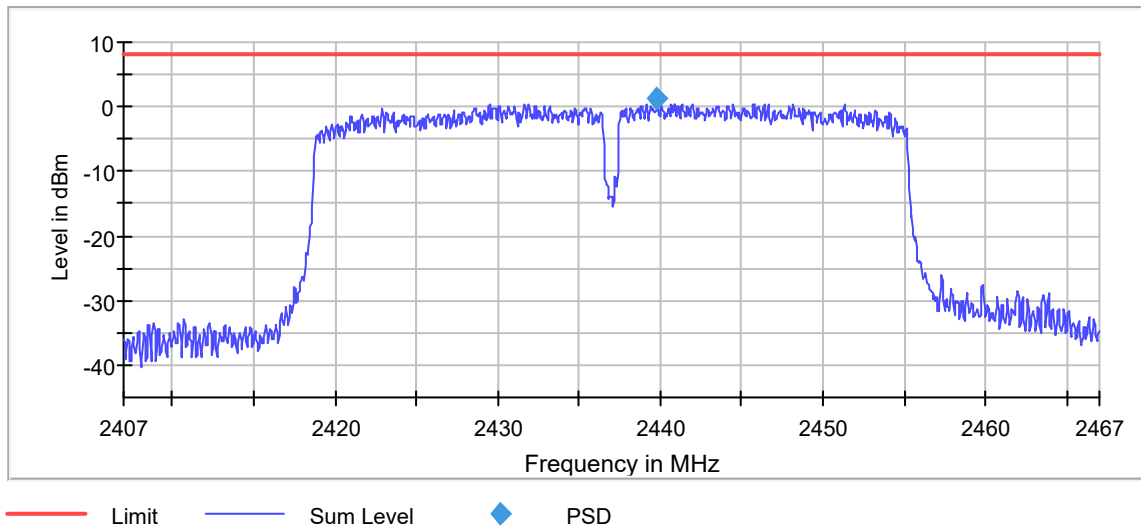

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.35 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.000000	---	---	2419.125000	2455.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

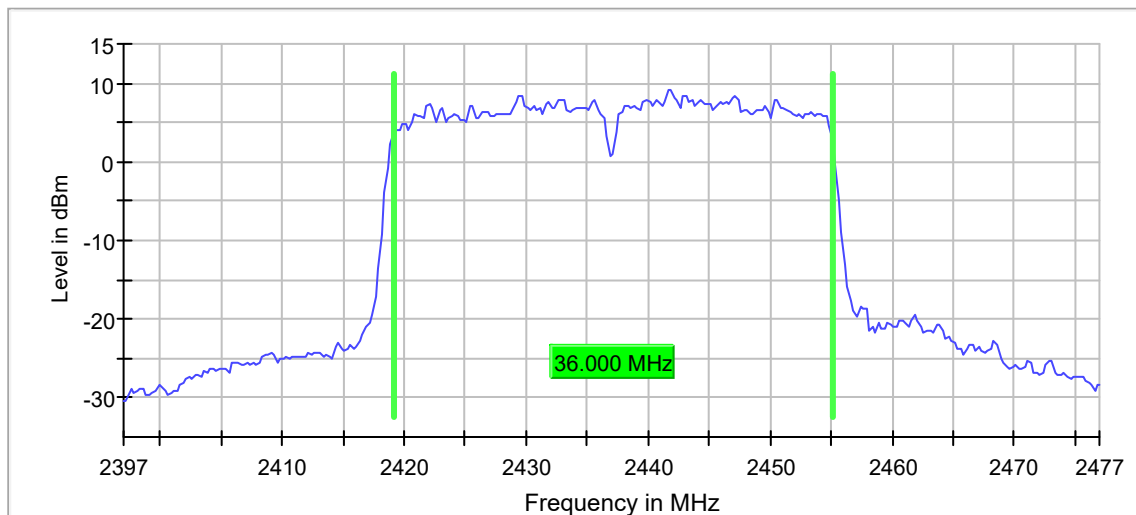

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	27 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.500000	0.500000	---	2433.725000	2470.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2452.000000	1.2	PASS

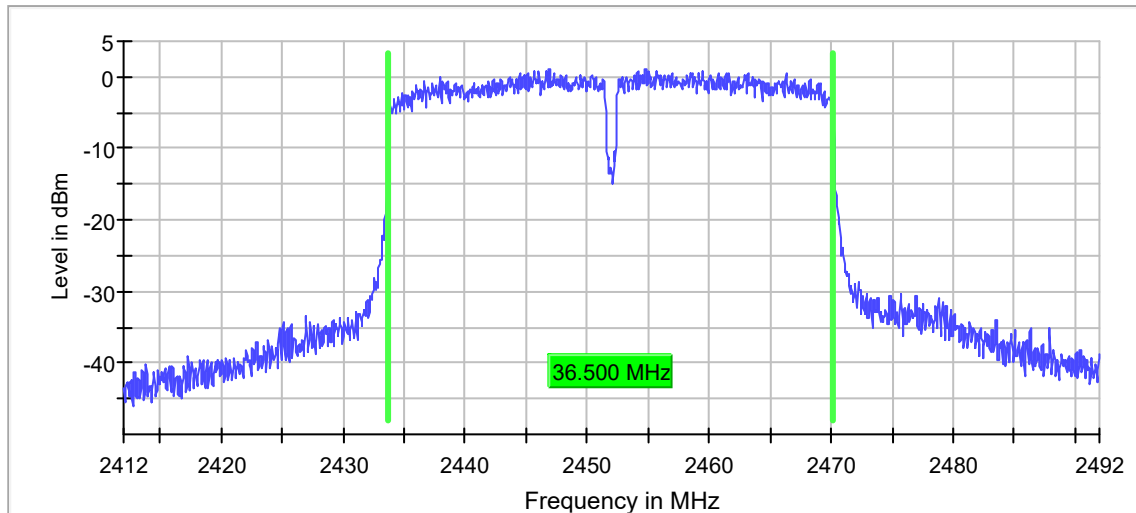

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.35 dB	0.50 dB

Peak output power (Sweep) (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2452.000000	25.6	30.0	PASS

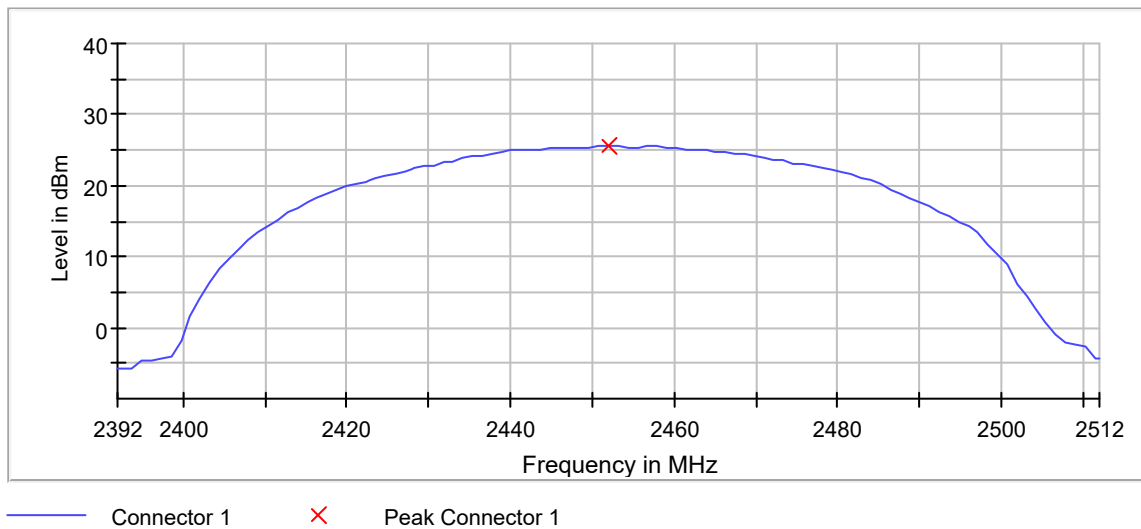

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.51200 GHz	2.51200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.500 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.24 dB	0.50 dB

Peak Power Spectral Density (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2454.775000	1.477	8.0	PASS

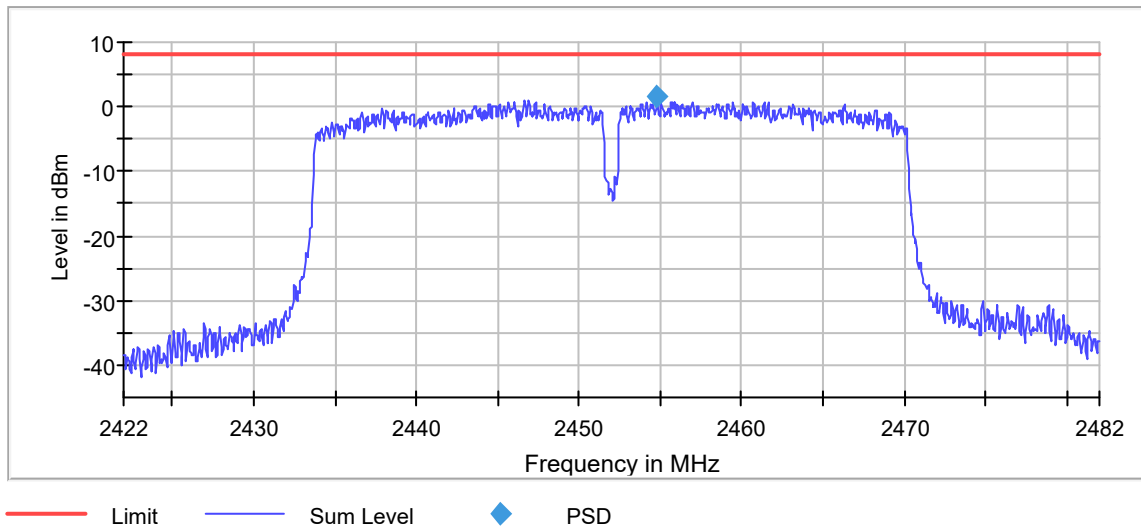

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.26 dB	0.50 dB

Occupied Channel Bandwidth 99% (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.000000	---	---	2434.125000	2470.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

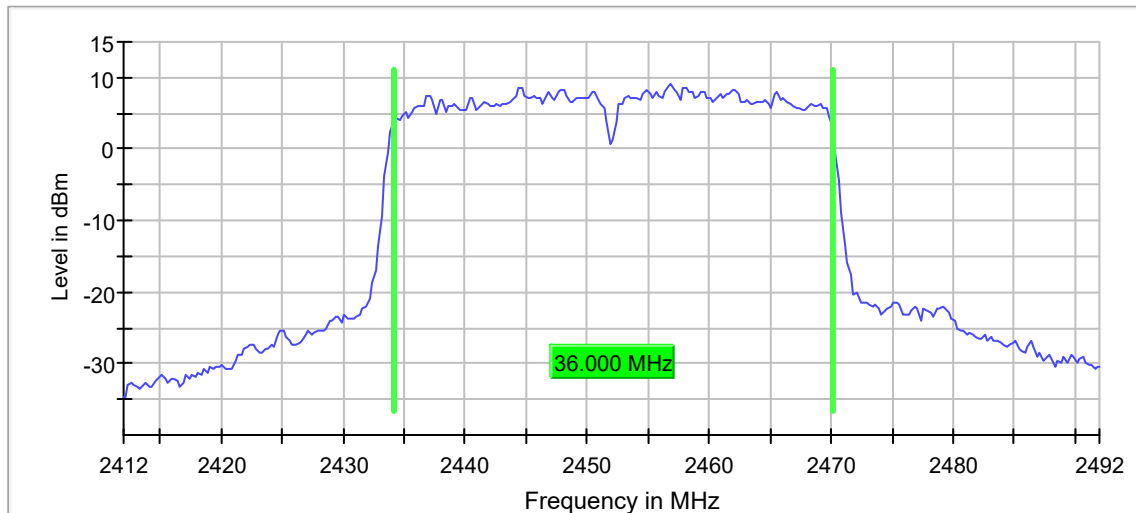

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	25 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.23 dB	0.30 dB

802.11n, 40MHz, MCS5

Minimum Emission Bandwidth 6 dB (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.350000	0.500000	---	2403.825000	2440.175000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2422.000000	1.7	PASS

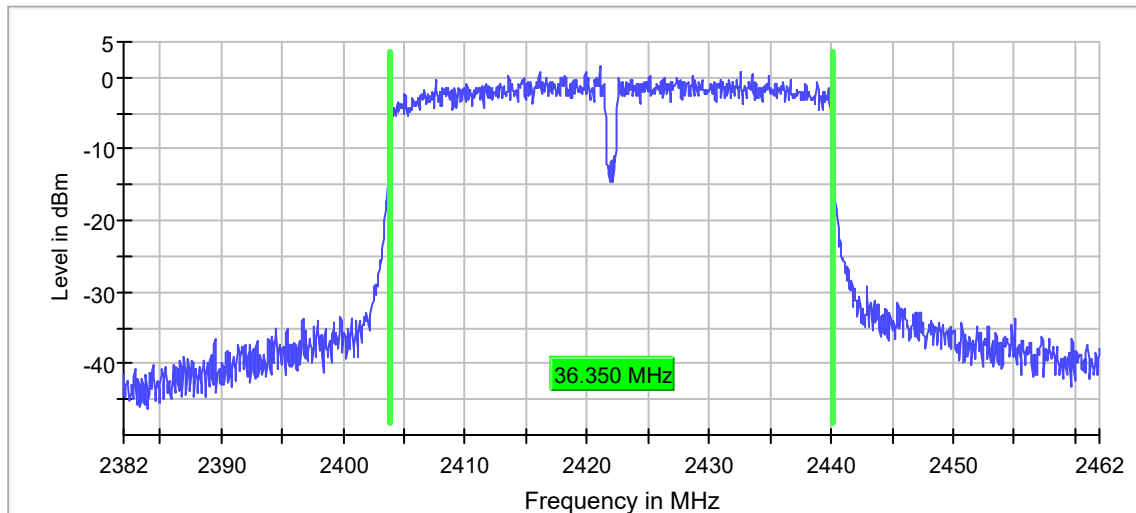

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.21 dB	0.50 dB

Peak output power (Sweep) (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	25.4	30.0	PASS

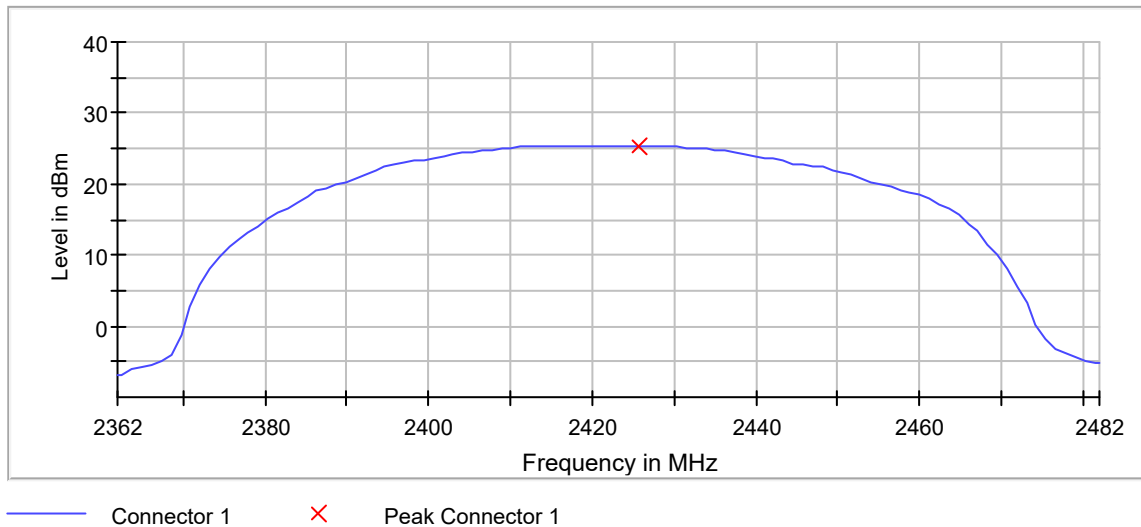

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.36200 GHz	2.36200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.350 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.50 dB

Peak Power Spectral Density (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2421.025000	1.406	8.0	PASS

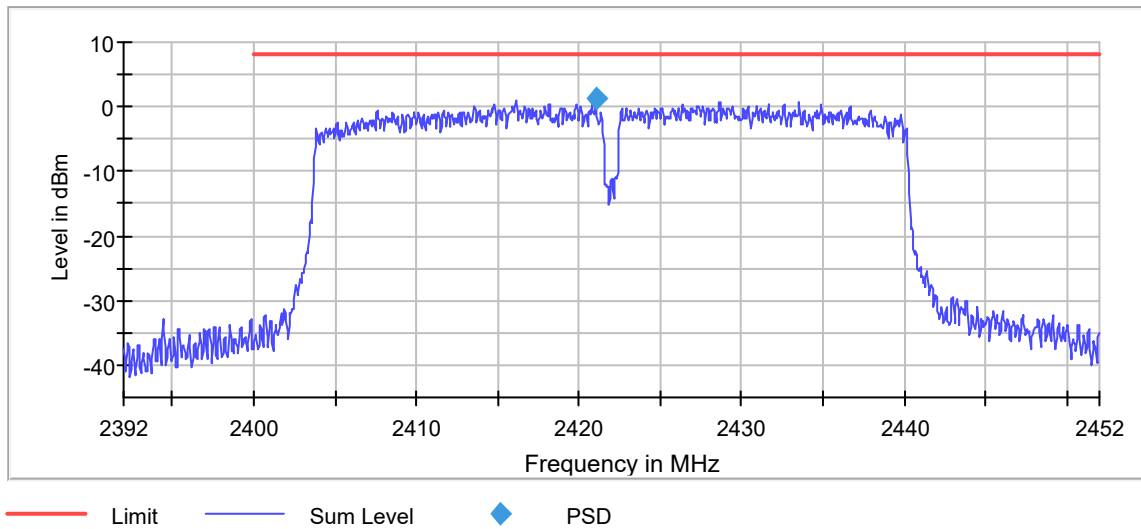

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.48 dB	0.50 dB

Occupied Channel Bandwidth 99% (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.250000	---	---	2403.875000	2440.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

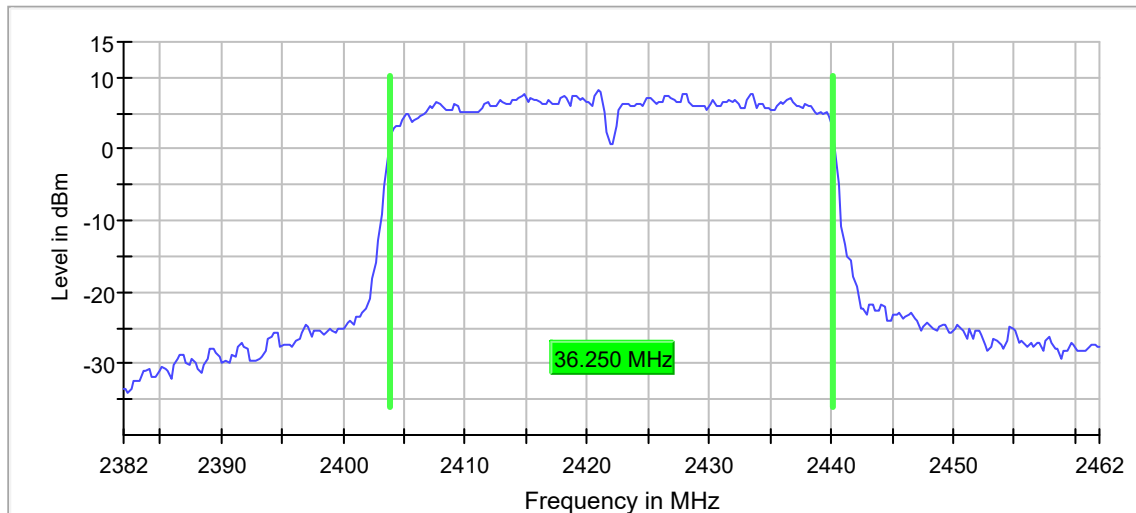

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	28 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.30 dB

Band Edge low (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2422.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2421.025000	2.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-32.1	14.2	-17.9	PASS
2399.825000	-32.1	14.3	-17.9	PASS
2394.475000	-32.2	14.3	-17.9	PASS
2394.425000	-32.7	14.8	-17.9	PASS
2396.725000	-32.8	15.0	-17.9	PASS
2396.675000	-32.8	15.0	-17.9	PASS
2399.175000	-33.0	15.1	-17.9	PASS
2399.225000	-33.0	15.1	-17.9	PASS
2397.575000	-33.1	15.2	-17.9	PASS
2399.725000	-33.1	15.2	-17.9	PASS
2397.625000	-33.1	15.3	-17.9	PASS
2397.875000	-33.2	15.3	-17.9	PASS
2394.525000	-33.2	15.4	-17.9	PASS
2397.925000	-33.3	15.4	-17.9	PASS
2397.225000	-33.4	15.5	-17.9	PASS

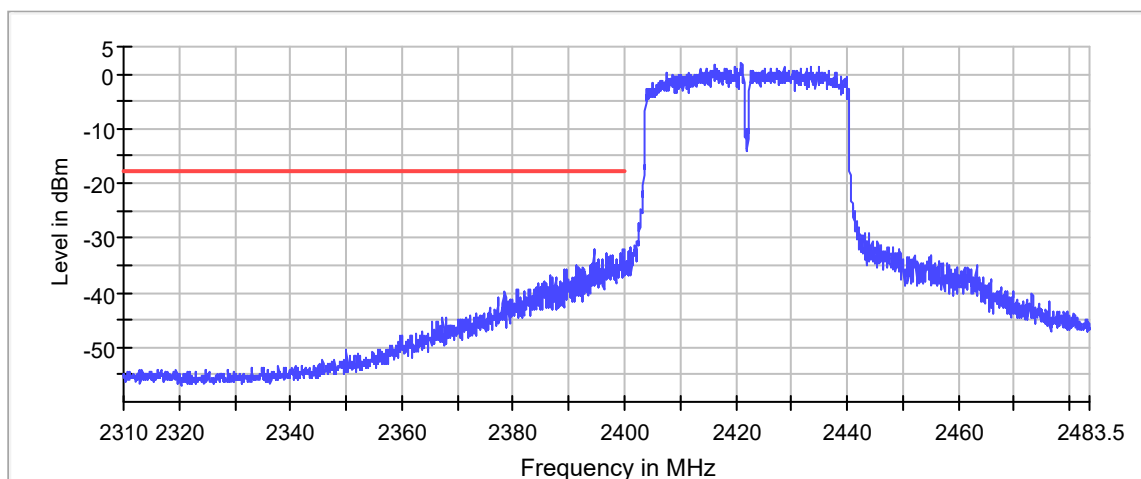

— Limit — Sum Level × Fail

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	33 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.34 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.400000	0.500000	---	2418.775000	2455.175000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	1.0	PASS

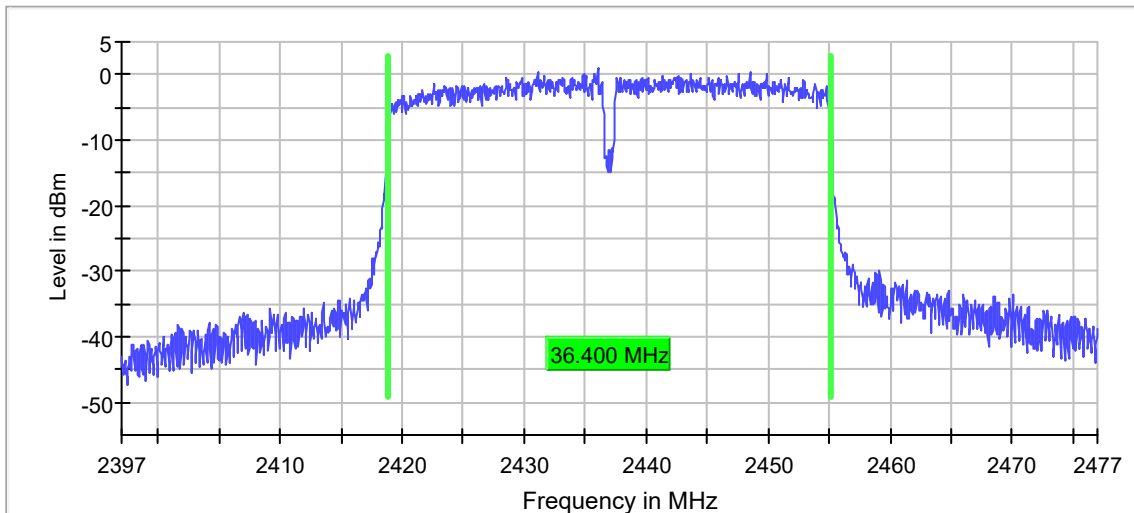

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.42 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.9	30.0	PASS

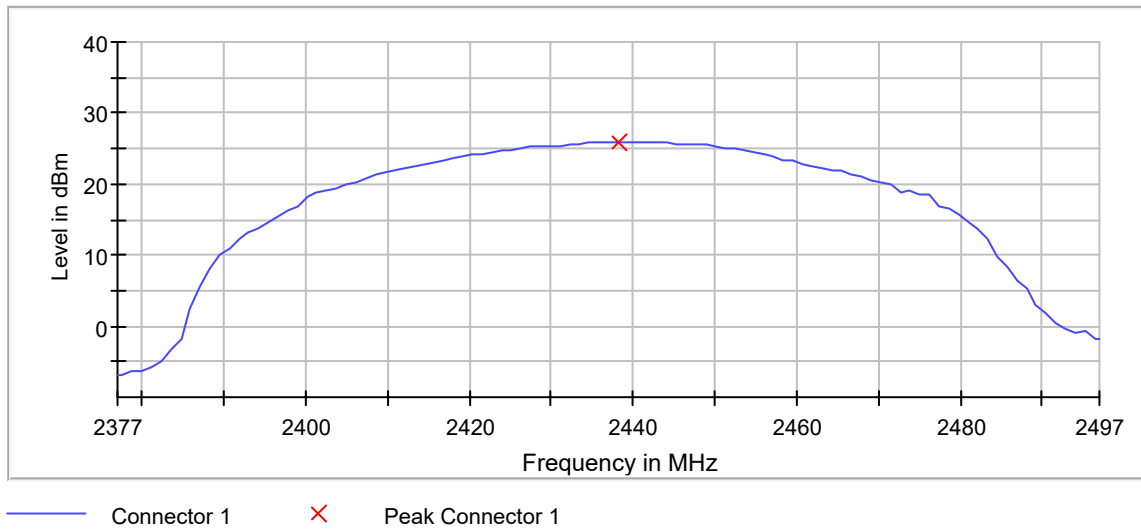

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.37700 GHz	2.37700 GHz
Stop Frequency	2.49700 GHz	2.49700 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.400 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.33 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2436.025000	0.915	8.0	PASS

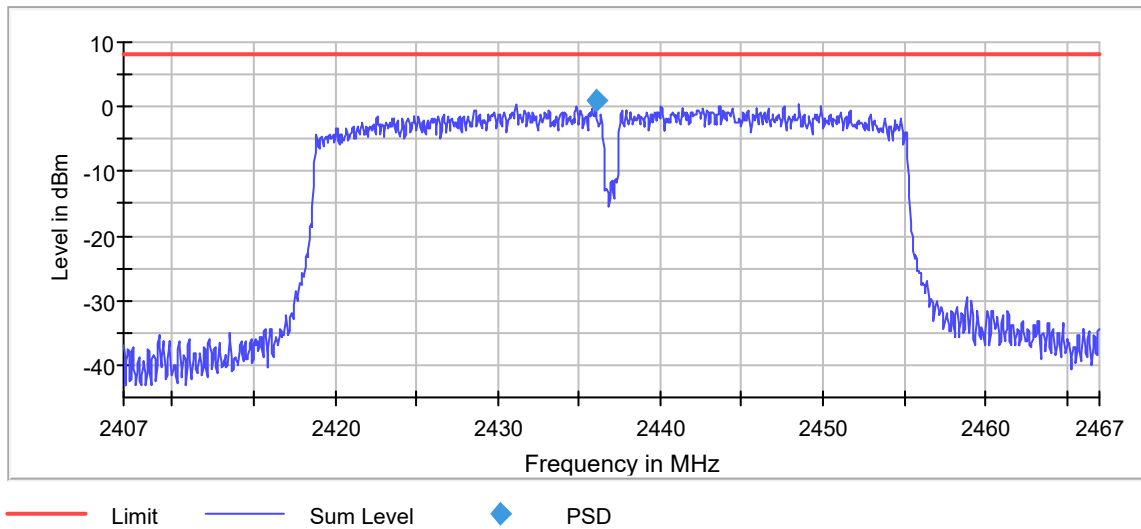

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.35 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.250000	---	---	2418.875000	2455.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

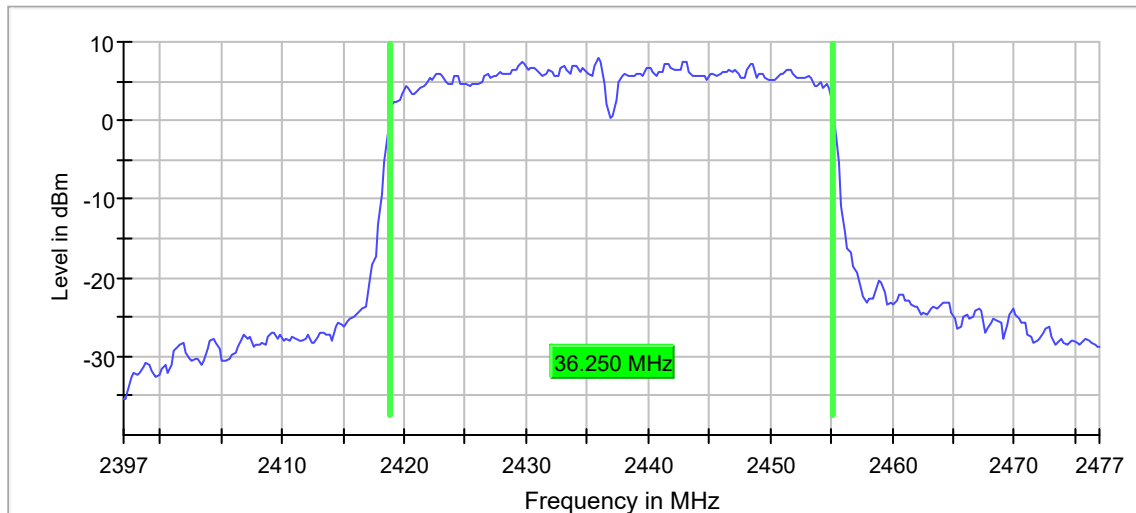

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	31 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.400000	0.500000	---	2433.775000	2470.175000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2452.000000	1.3	PASS

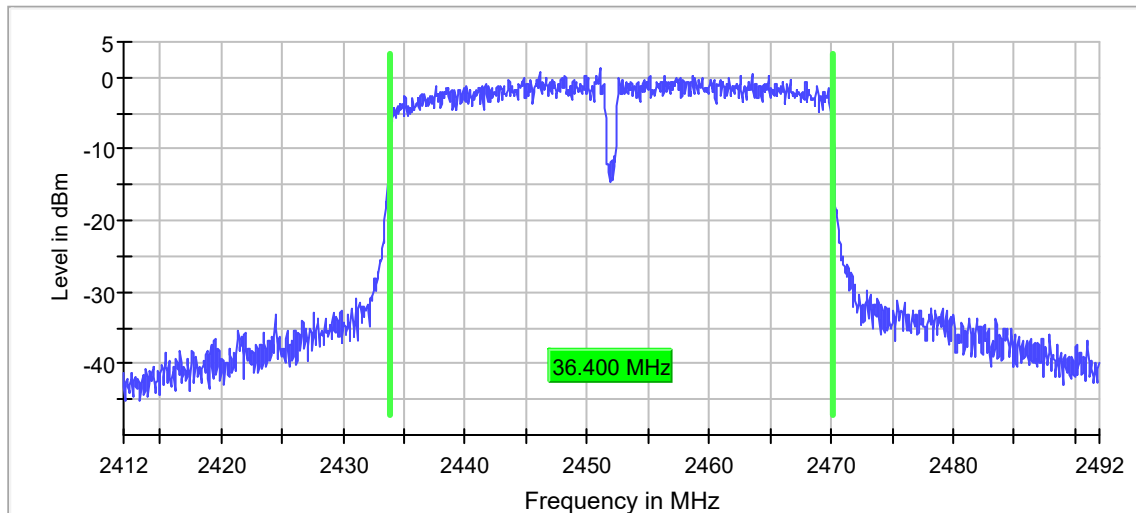

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	23 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.49 dB	0.50 dB

Peak output power (Sweep) (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2452.000000	25.0	30.0	PASS

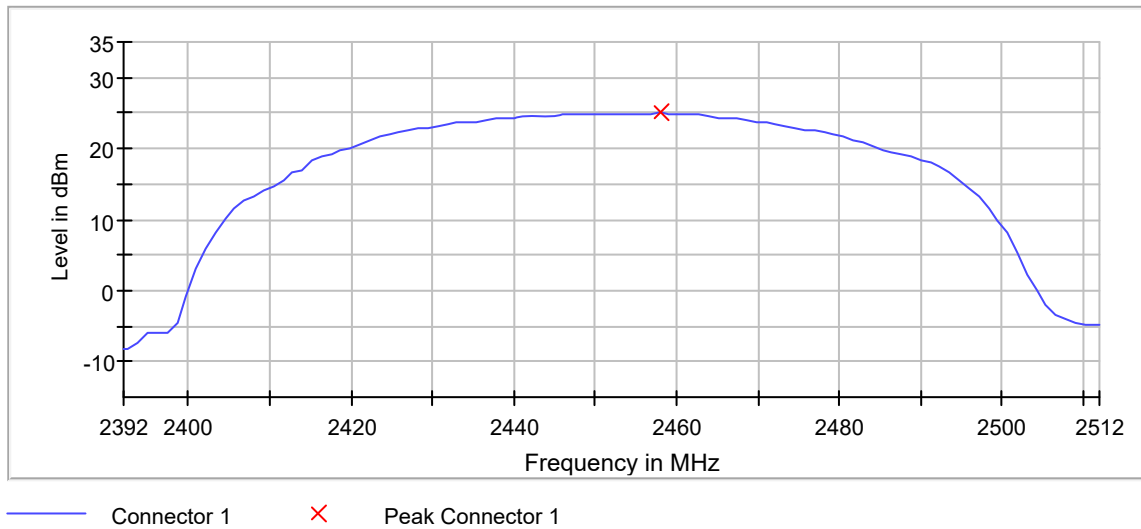

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.51200 GHz	2.51200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.400 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.50 dB

Peak Power Spectral Density (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2451.025000	1.274	8.0	PASS

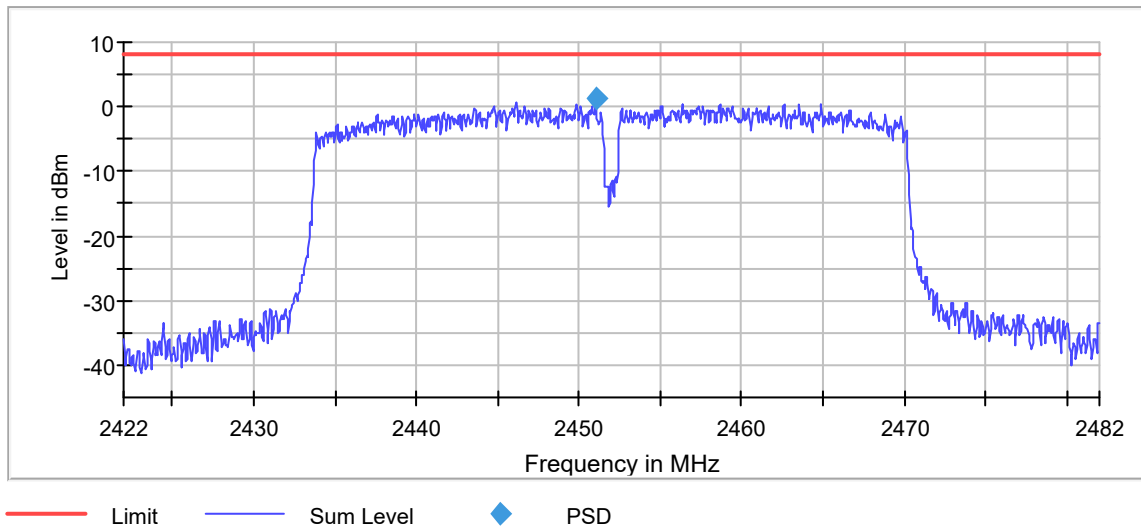

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.44 dB	0.50 dB

Occupied Channel Bandwidth 99% (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.250000	---	---	2433.875000	2470.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

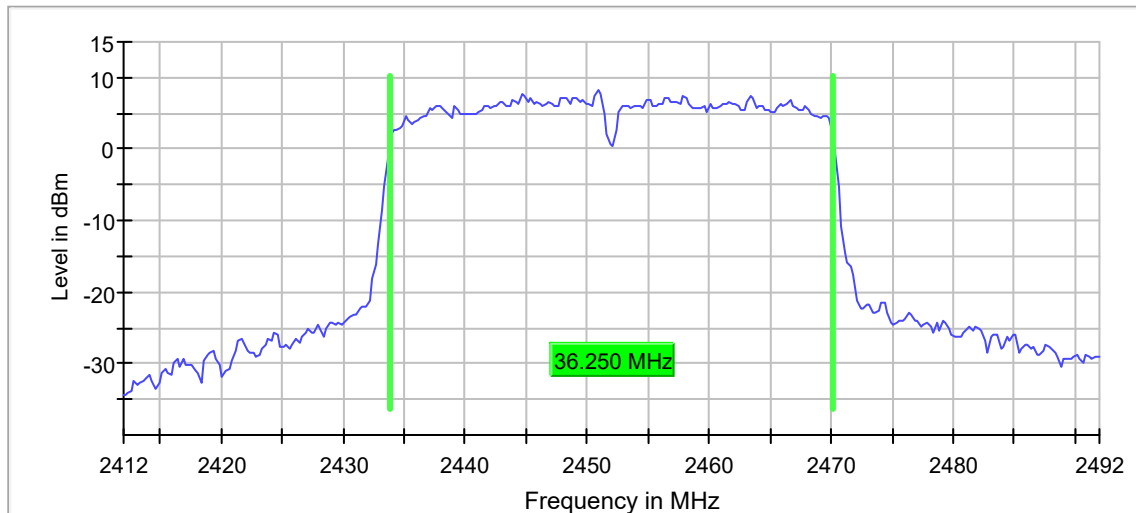

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	22 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.30 dB

802.11n, 40MHz, MCS6

Minimum Emission Bandwidth 6 dB (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.350000	0.500000	---	2403.875000	2440.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2422.000000	0.8	PASS

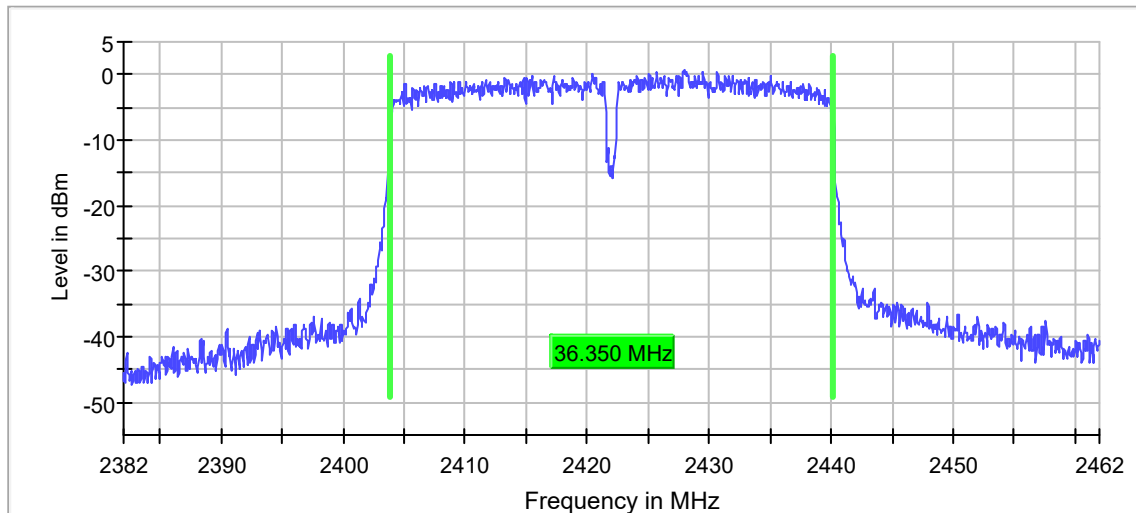

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.36 dB	0.50 dB

Peak output power (Sweep) (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	25.4	30.0	PASS

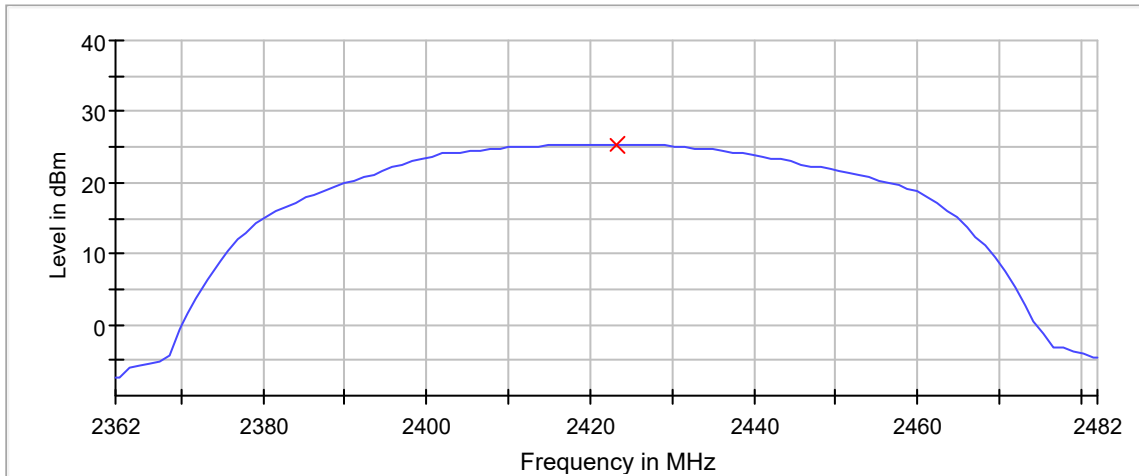

— Connector 1 × Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.36200 GHz	2.36200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.350 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.50 dB

Peak Power Spectral Density (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2427.925000	1.156	8.0	PASS

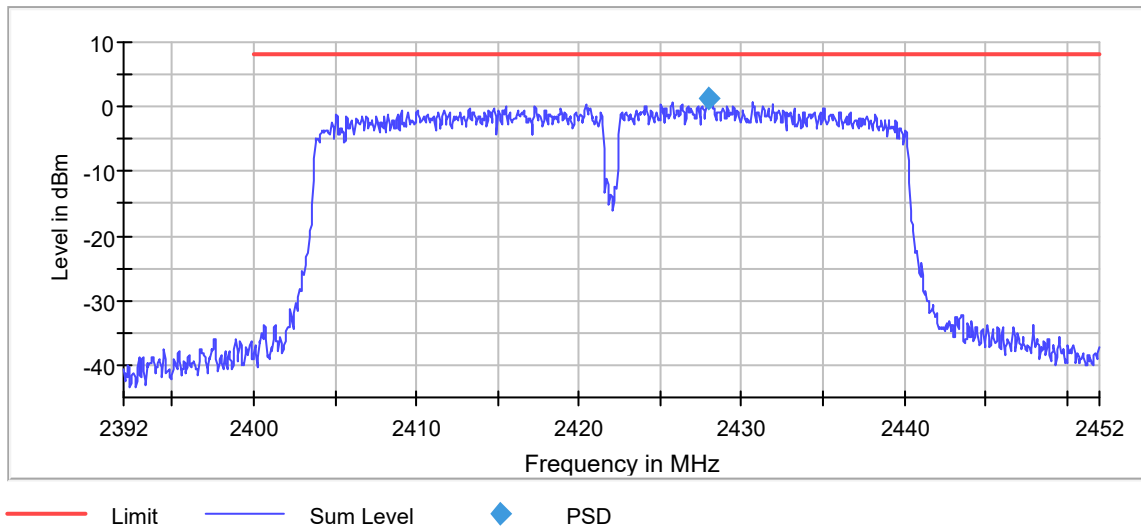

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.47 dB	0.50 dB

Occupied Channel Bandwidth 99% (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.000000	---	---	2403.875000	2439.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

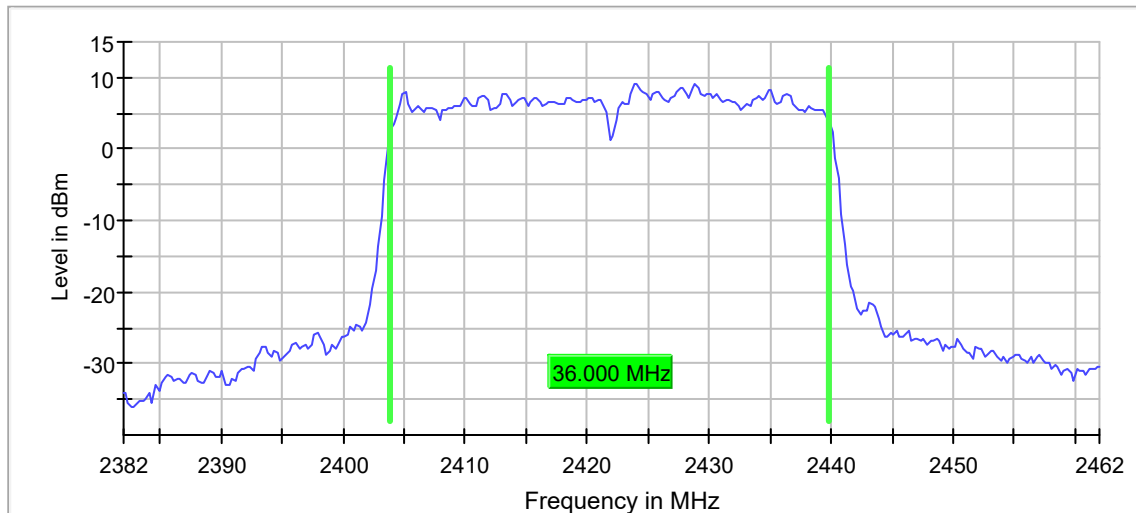

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	20 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

Band Edge low (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2422.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2427.925000	1.7

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2397.625000	-34.7	16.5	-18.3	PASS
2397.575000	-34.8	16.5	-18.3	PASS
2399.175000	-34.8	16.6	-18.3	PASS
2399.125000	-35.4	17.1	-18.3	PASS
2396.025000	-35.4	17.1	-18.3	PASS
2399.225000	-35.5	17.2	-18.3	PASS
2395.975000	-35.5	17.3	-18.3	PASS
2394.475000	-35.6	17.4	-18.3	PASS
2394.525000	-35.7	17.4	-18.3	PASS
2397.525000	-35.7	17.4	-18.3	PASS
2397.675000	-35.8	17.5	-18.3	PASS
2399.525000	-35.8	17.6	-18.3	PASS
2399.575000	-35.8	17.6	-18.3	PASS
2398.875000	-36.0	17.7	-18.3	PASS
2396.725000	-36.0	17.7	-18.3	PASS

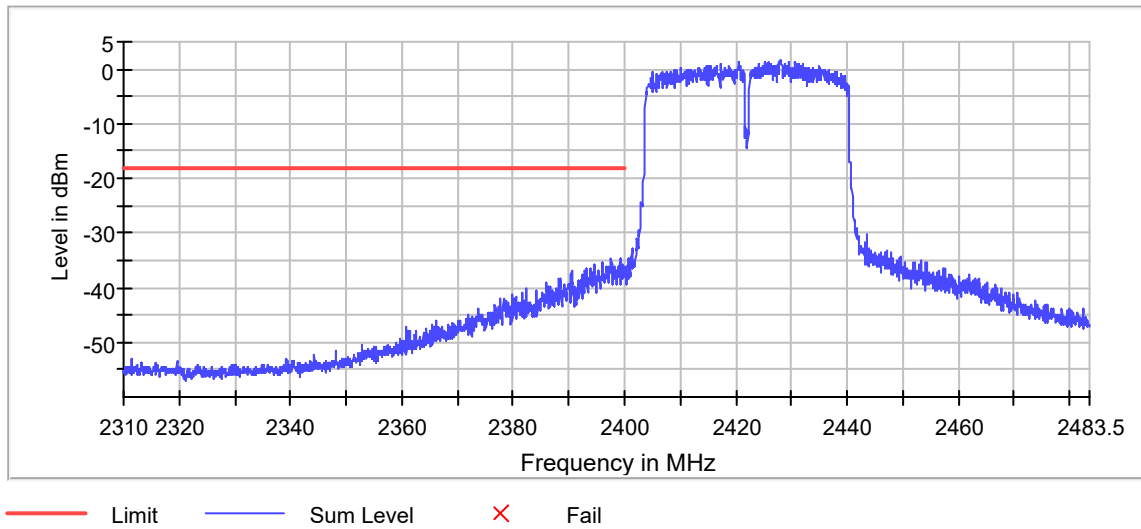

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	44 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.100000	0.500000	---	2419.075000	2455.175000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	0.7	PASS

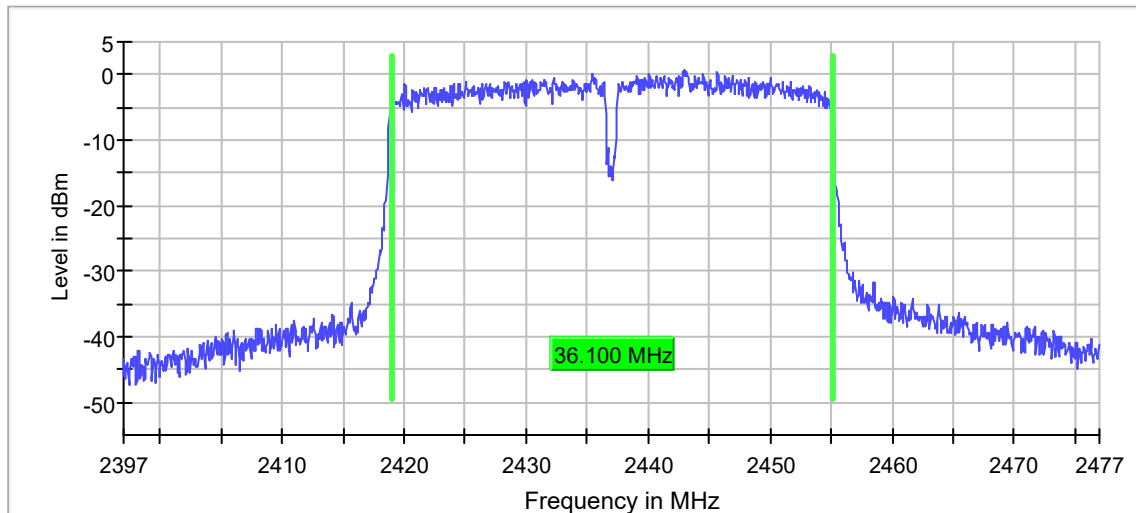

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	25 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.21 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.6	30.0	PASS

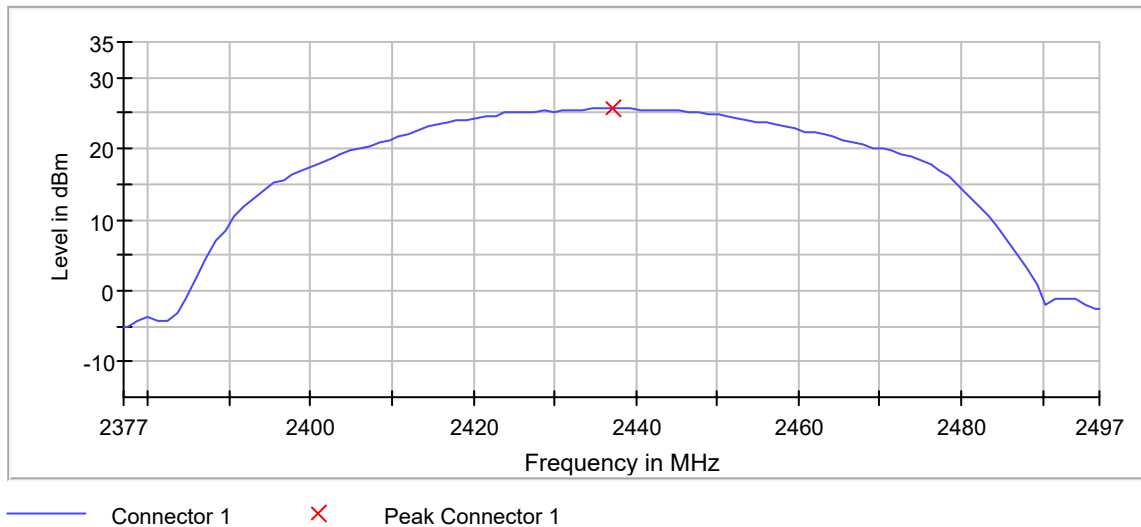

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.37700 GHz	2.37700 GHz
Stop Frequency	2.49700 GHz	2.49700 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.100 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.34 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2442.925000	0.820	8.0	PASS

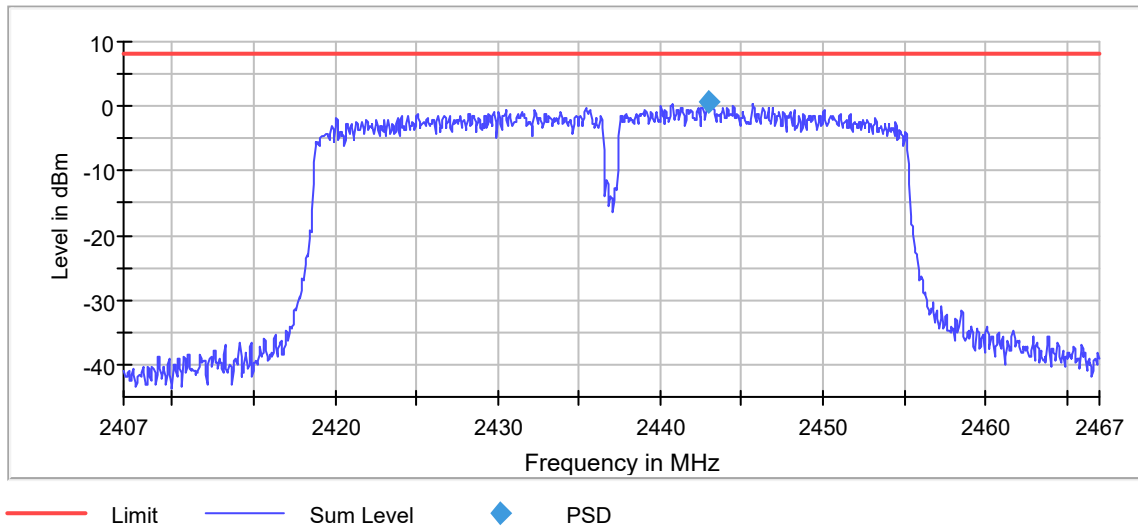

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.37 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.000000	---	---	2418.875000	2454.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

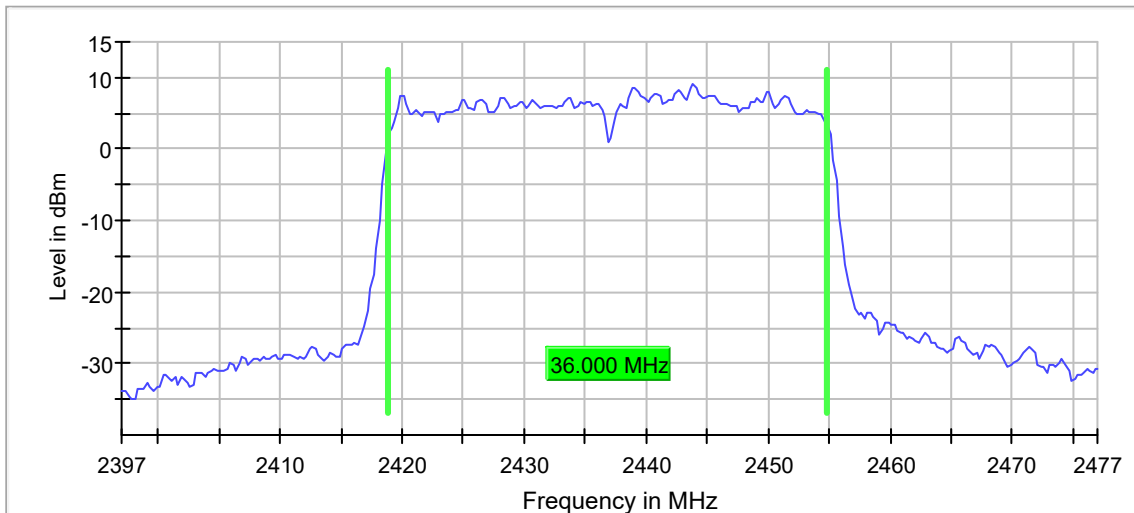

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	32 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.100000	0.500000	---	2434.075000	2470.175000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2452.000000	0.6	PASS

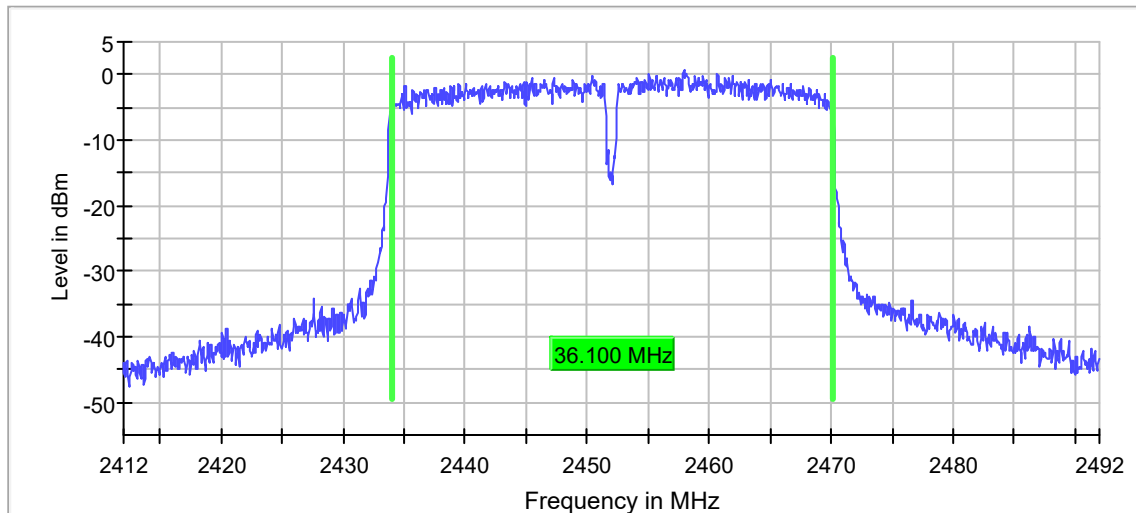

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	24 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Peak output power (Sweep) (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2452.000000	24.8	30.0	PASS

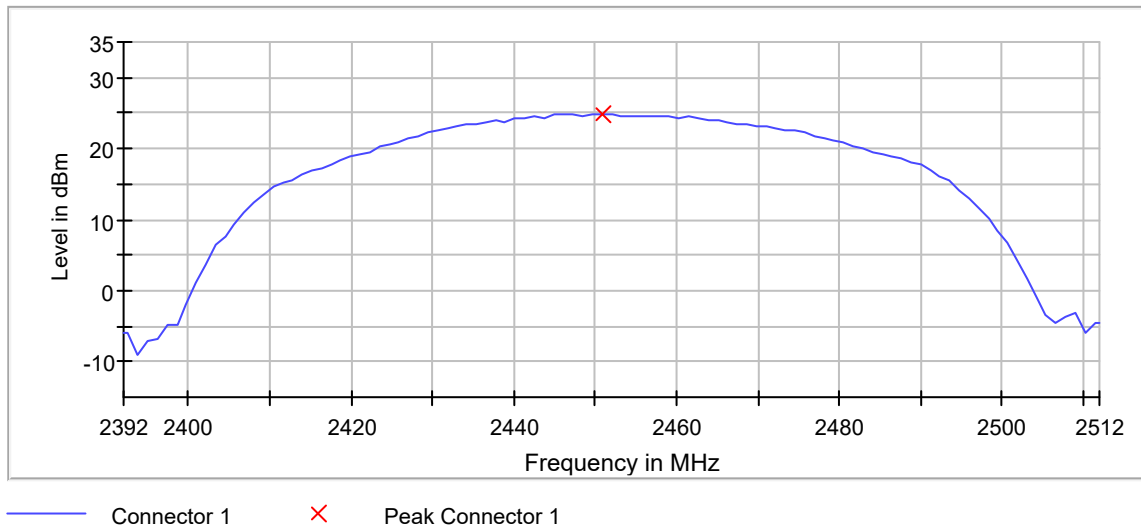

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.51200 GHz	2.51200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.100 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweeptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.36 dB	0.50 dB

Peak Power Spectral Density (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2457.925000	0.660	8.0	PASS

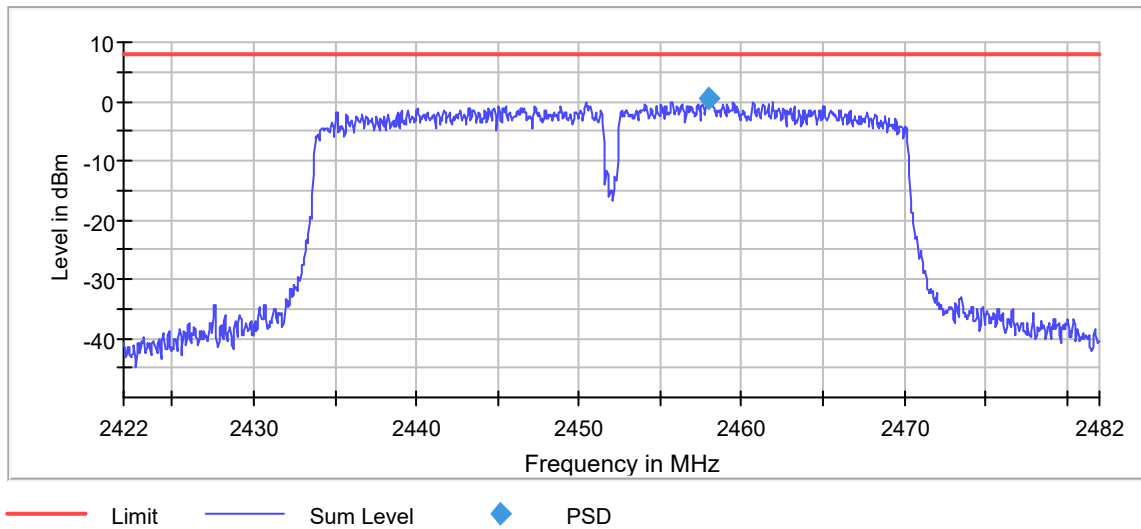

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.38 dB	0.50 dB

Occupied Channel Bandwidth 99% (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.000000	---	---	2433.875000	2469.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

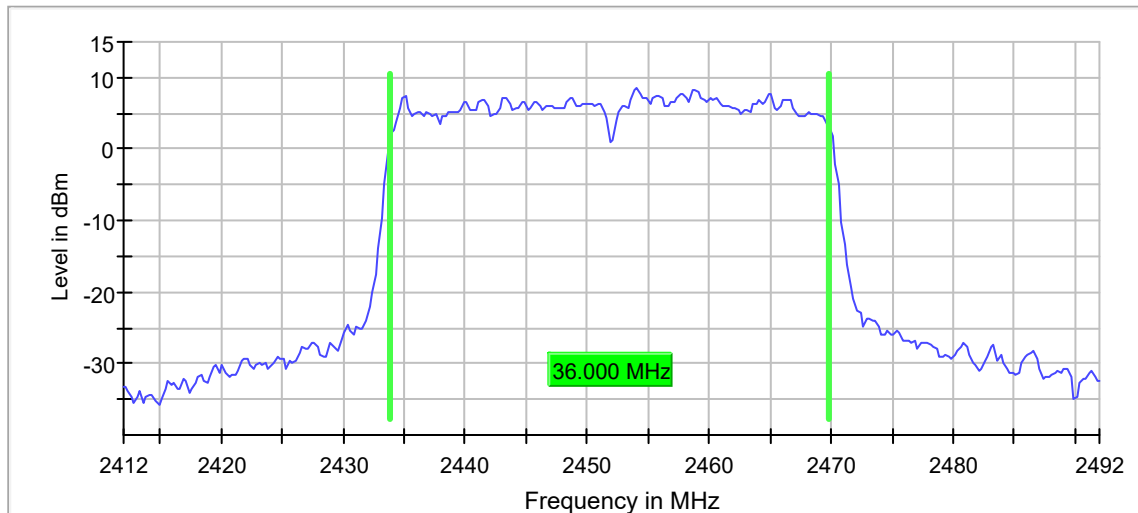

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	24 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

Band Edge high (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2452.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2457.925000	1.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2486.275000	-37.5	18.9	-18.6	PASS
2486.325000	-38.5	19.9	-18.6	PASS
2484.225000	-38.5	19.9	-18.6	PASS
2484.275000	-38.6	20.0	-18.6	PASS
2486.675000	-38.7	20.1	-18.6	PASS
2483.525000	-38.8	20.2	-18.6	PASS
2486.725000	-38.9	20.3	-18.6	PASS
2484.475000	-38.9	20.3	-18.6	PASS
2484.175000	-39.0	20.4	-18.6	PASS
2486.225000	-39.2	20.6	-18.6	PASS
2484.425000	-39.2	20.6	-18.6	PASS
2485.375000	-39.3	20.7	-18.6	PASS
2485.425000	-39.4	20.8	-18.6	PASS
2488.825000	-39.6	21.0	-18.6	PASS
2484.525000	-39.7	21.1	-18.6	PASS

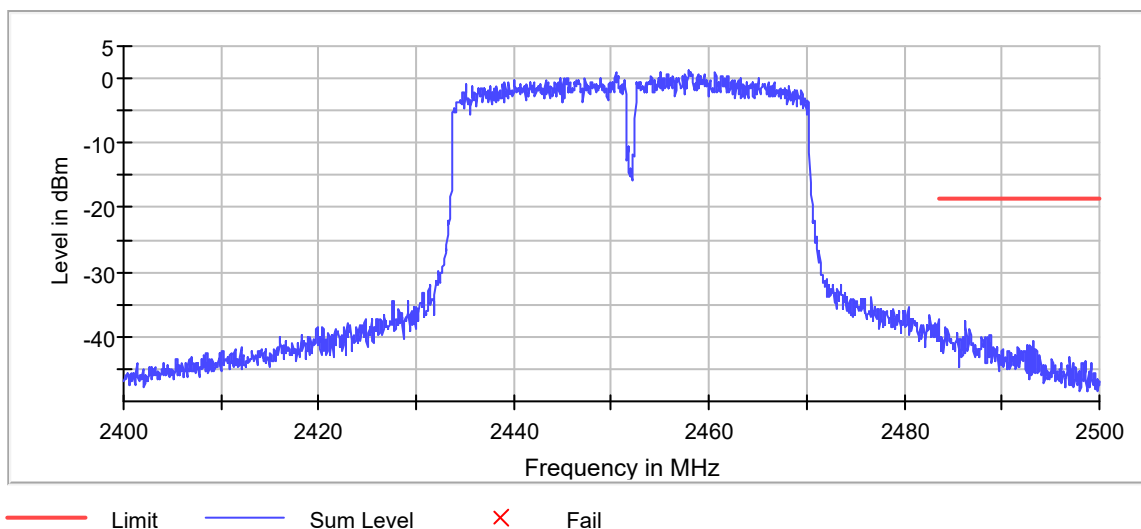

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	22 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.48350 GHz	2.48350 GHz
Stop Frequency	2.50000 GHz	2.50000 GHz
Span	16.500 MHz	16.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
SweepTime	1.010 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

802.11n, 40MHz, MCS7

Minimum Emission Bandwidth 6 dB (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.450000	0.500000	---	2403.775000	2440.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2422.000000	0.2	PASS

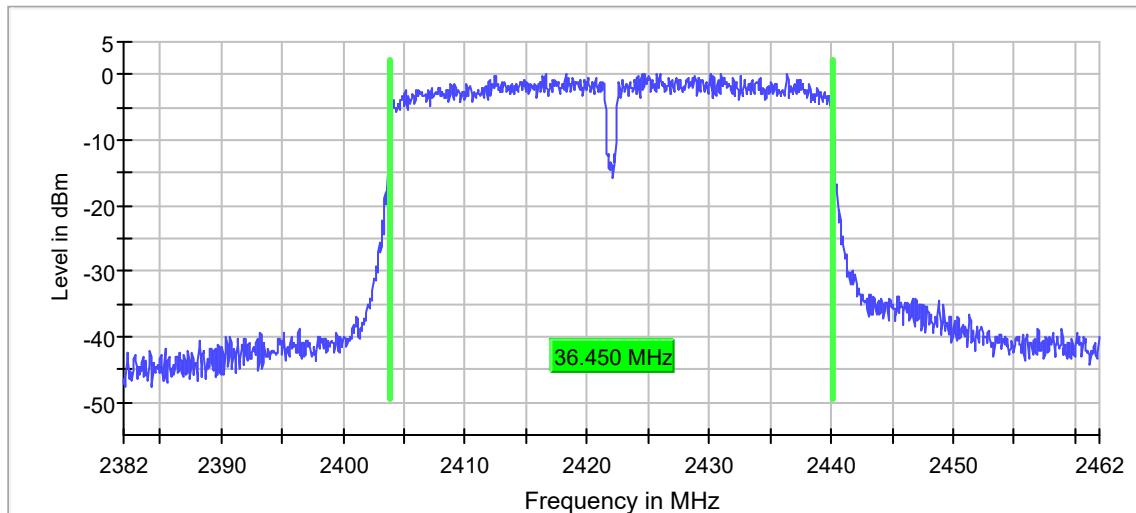

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	29 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.37 dB	0.50 dB

Peak output power (Sweep) (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	25.5	30.0	PASS

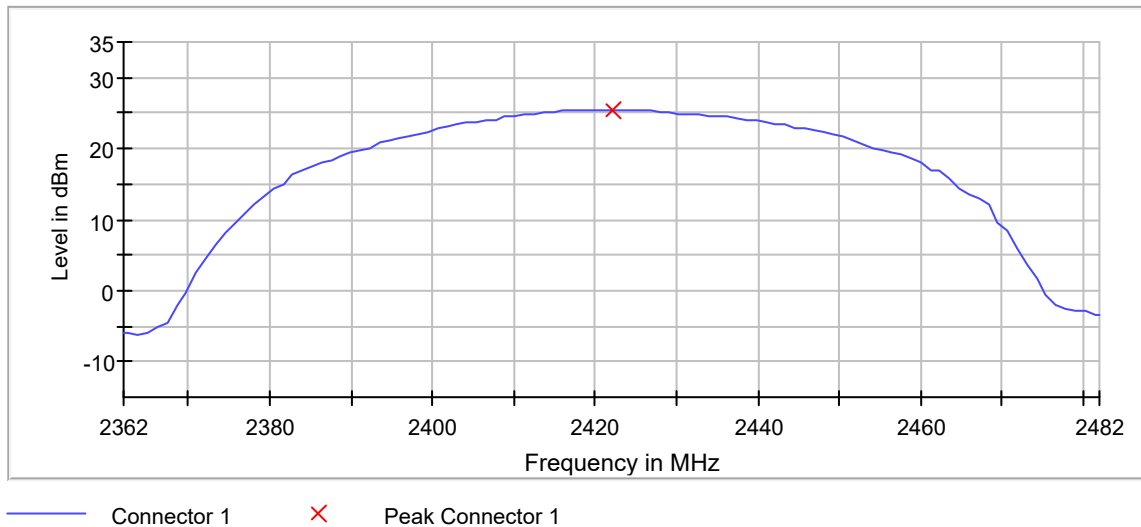

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.36200 GHz	2.36200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.450 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweeptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.50 dB

Peak Power Spectral Density (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2426.025000	0.534	8.0	PASS

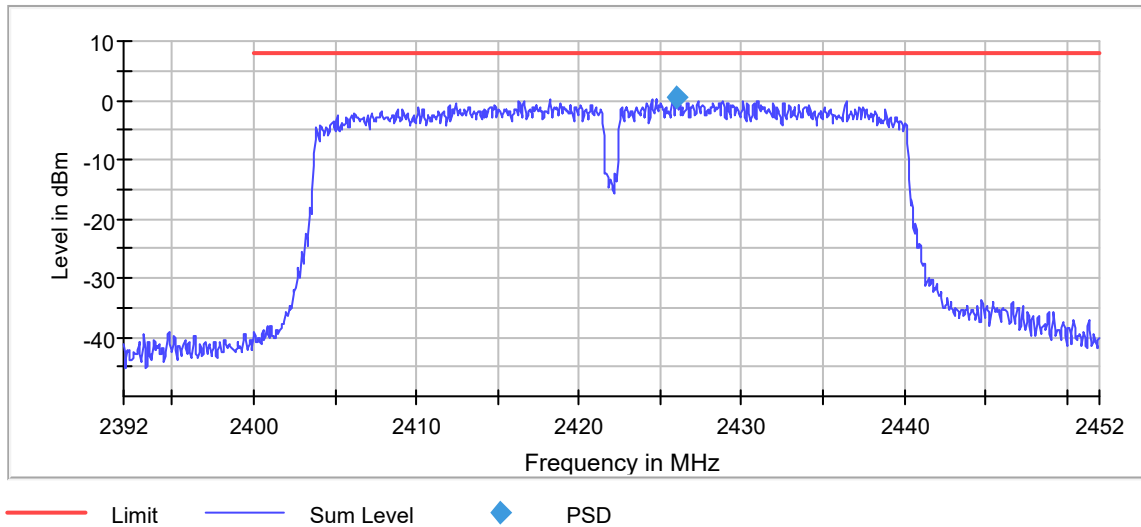

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.45200 GHz	2.45200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.22 dB	0.50 dB

Occupied Channel Bandwidth 99% (2422 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.250000	---	---	2403.875000	2440.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2422.000000	PASS

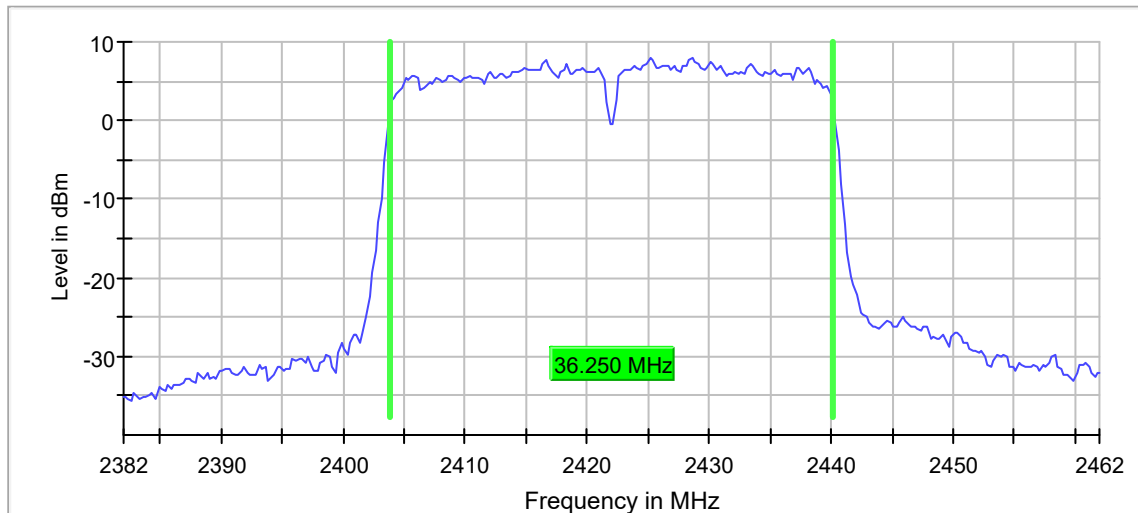

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.38200 GHz	2.38200 GHz
Stop Frequency	2.46200 GHz	2.46200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	27 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.30 dB

Band Edge low (2422 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2422.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2424.775000	0.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-38.1	19.0	-19.1	PASS
2395.125000	-38.5	19.4	-19.1	PASS
2394.775000	-38.7	19.6	-19.1	PASS
2399.775000	-38.8	19.7	-19.1	PASS
2399.425000	-38.9	19.8	-19.1	PASS
2399.725000	-38.9	19.8	-19.1	PASS
2398.525000	-38.9	19.8	-19.1	PASS
2394.825000	-38.9	19.8	-19.1	PASS
2395.075000	-38.9	19.8	-19.1	PASS
2398.325000	-39.0	19.9	-19.1	PASS
2398.475000	-39.0	19.9	-19.1	PASS
2399.475000	-39.0	19.9	-19.1	PASS
2396.375000	-39.1	20.0	-19.1	PASS
2399.575000	-39.1	20.0	-19.1	PASS
2398.275000	-39.2	20.1	-19.1	PASS

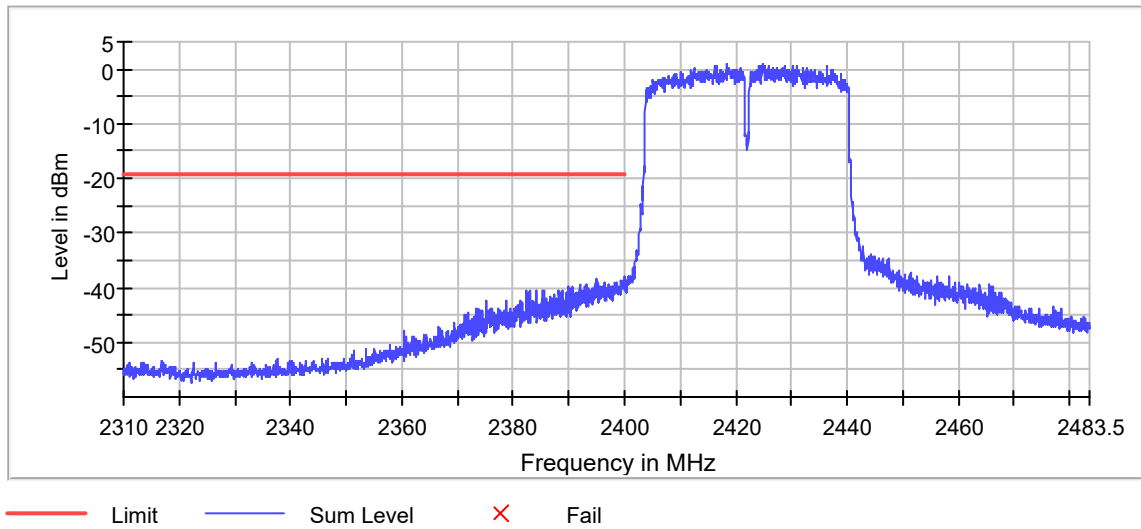

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	35 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	30.000 dBm	20.000 dBm
Attenuation	45.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.44 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.450000	0.500000	---	2418.775000	2455.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2437.000000	0.2	PASS

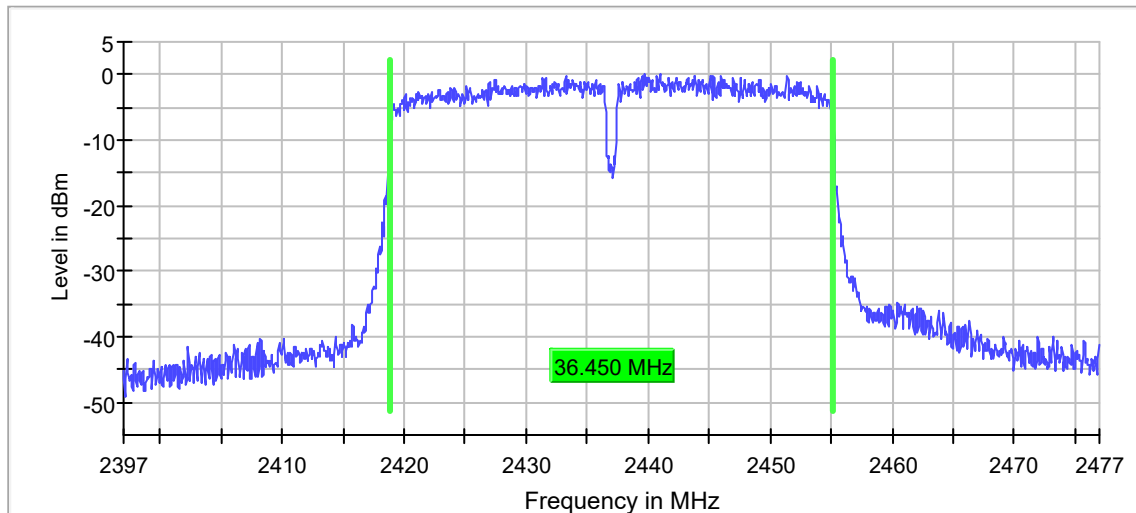

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	23 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.16 dB	0.50 dB

Peak output power (Sweep) (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2437.000000	25.1	30.0	PASS

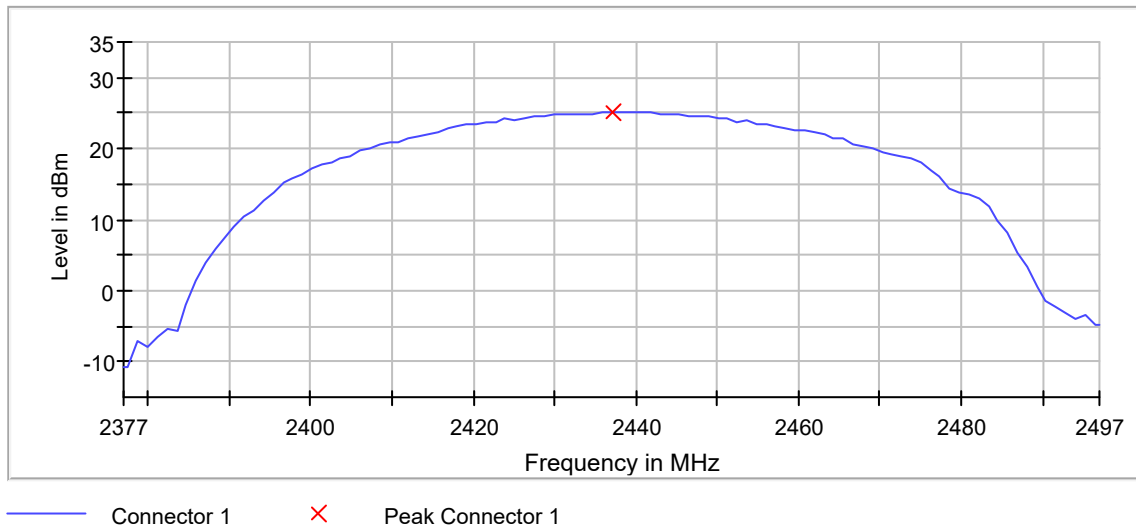

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.37700 GHz	2.37700 GHz
Stop Frequency	2.49700 GHz	2.49700 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	>= 36.450 MHz
VBW	80.000 MHz	>= 120.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.50 dB

Peak Power Spectral Density (2437 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2441.025000	0.311	8.0	PASS

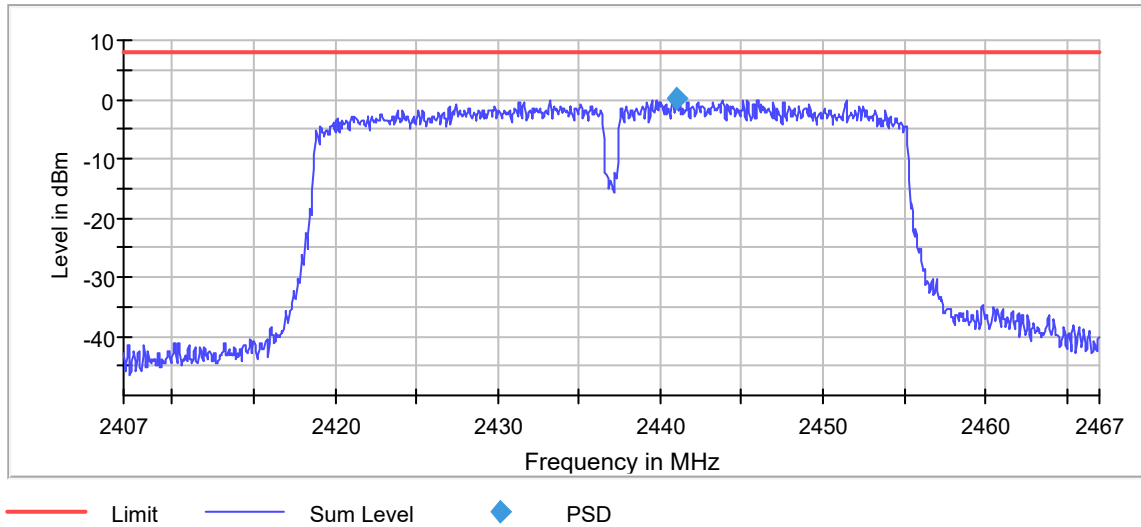

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40700 GHz	2.40700 GHz
Stop Frequency	2.46700 GHz	2.46700 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.31 dB	0.50 dB

Occupied Channel Bandwidth 99% (2437 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2437.000000	36.250000	---	---	2418.875000	2455.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2437.000000	PASS

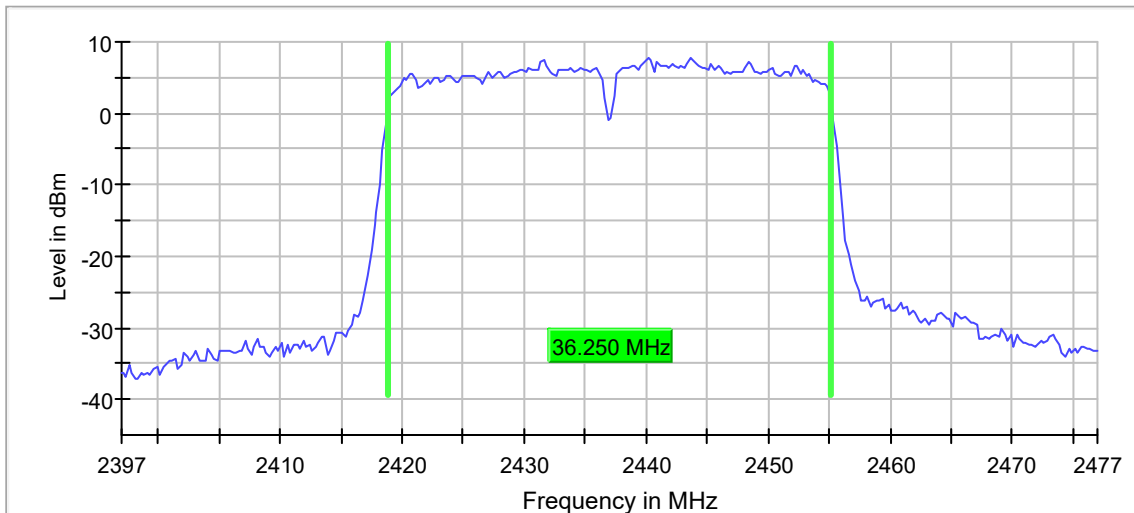

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.450000	0.500000	---	2433.775000	2470.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2452.000000	0.2	PASS

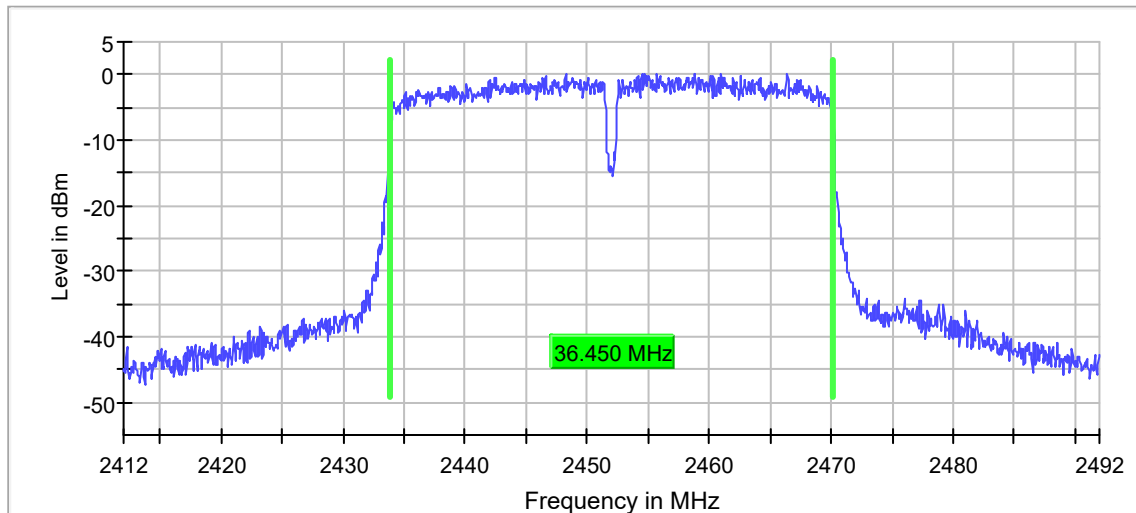

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	22 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.31 dB	0.50 dB

Peak output power (Sweep) (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2452.000000	24.7	30.0	PASS

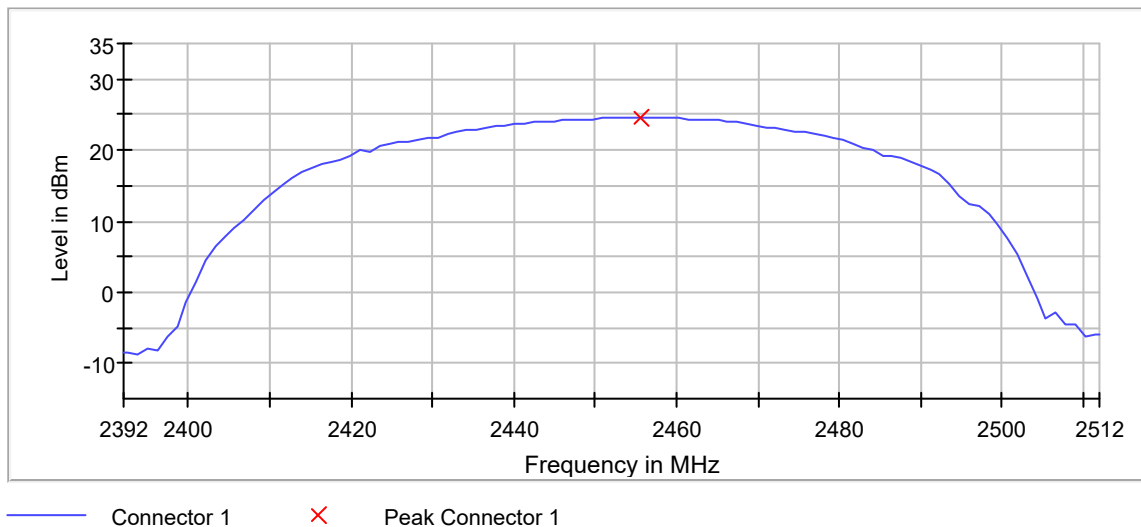

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39200 GHz	2.39200 GHz
Stop Frequency	2.51200 GHz	2.51200 GHz
Span	120.000 MHz	120.000 MHz
RBW	40.000 MHz	≥ 36.450 MHz
VBW	80.000 MHz	≥ 120.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.31 dB	0.50 dB

Peak Power Spectral Density (2452 MHz; 15.000 dBm; 40 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2456.025000	0.241	8.0	PASS

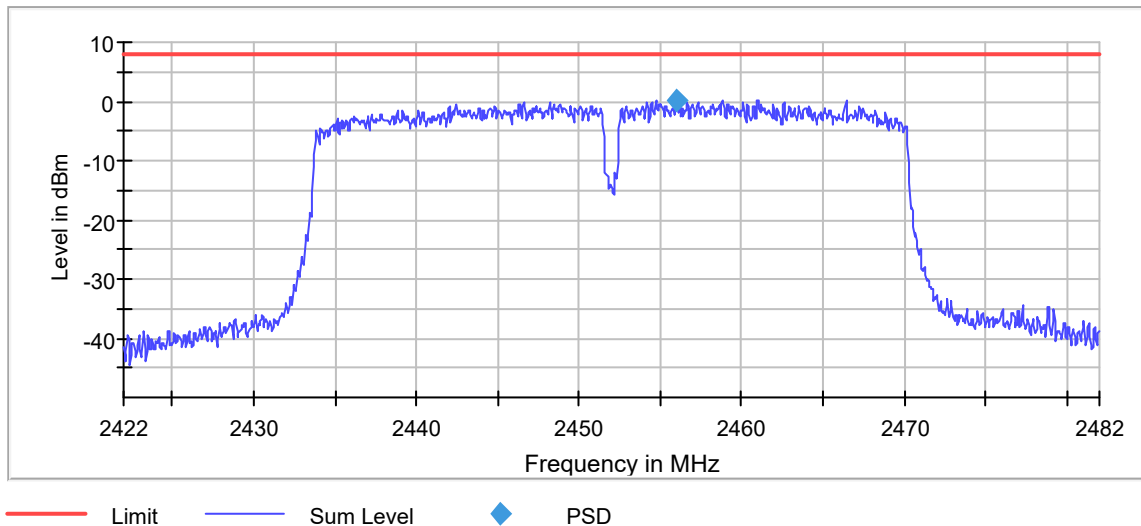

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1200	~ 1200
Sweptime	1.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.35 dB	0.50 dB

Occupied Channel Bandwidth 99% (2452 MHz; 15.000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2452.000000	36.250000	---	---	2433.875000	2470.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2452.000000	PASS

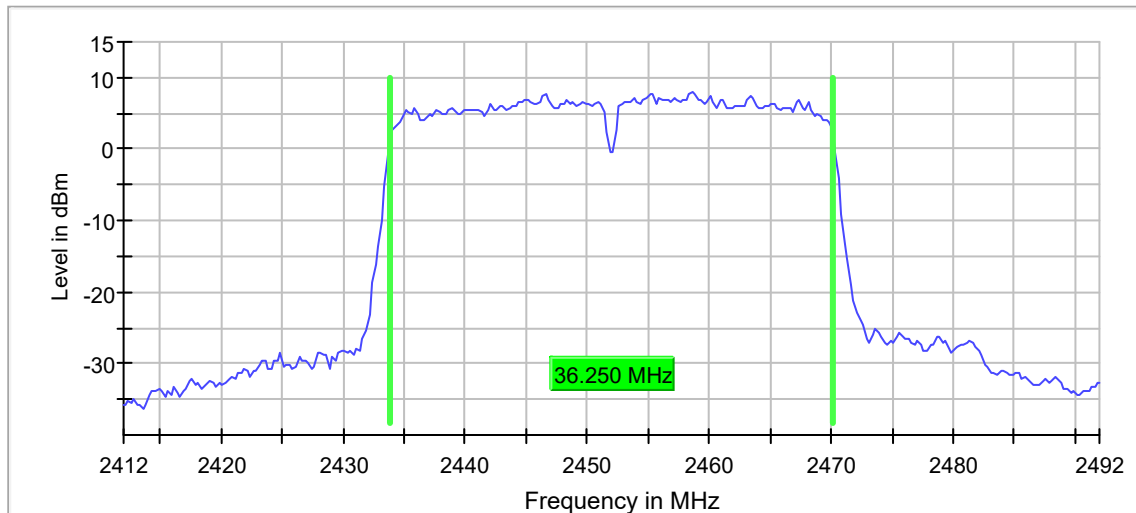

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	26 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.30 dB

Bluetooth, 1MHz, Power = Hex 14

Minimum Emission Bandwidth 6 dB (2402 MHz; 15.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.831684	0.500000	---	2401.564356	2402.396040

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	13.1	PASS

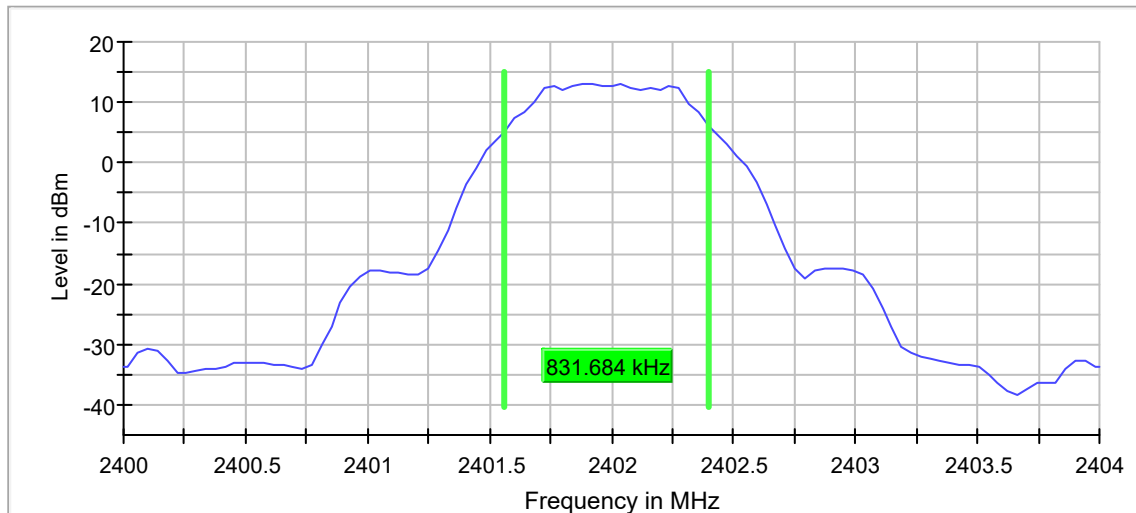

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	41.830 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.38 dB	0.50 dB

Peak output power (Sweep) (2402 MHz; 15.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	14.9	30.0	PASS

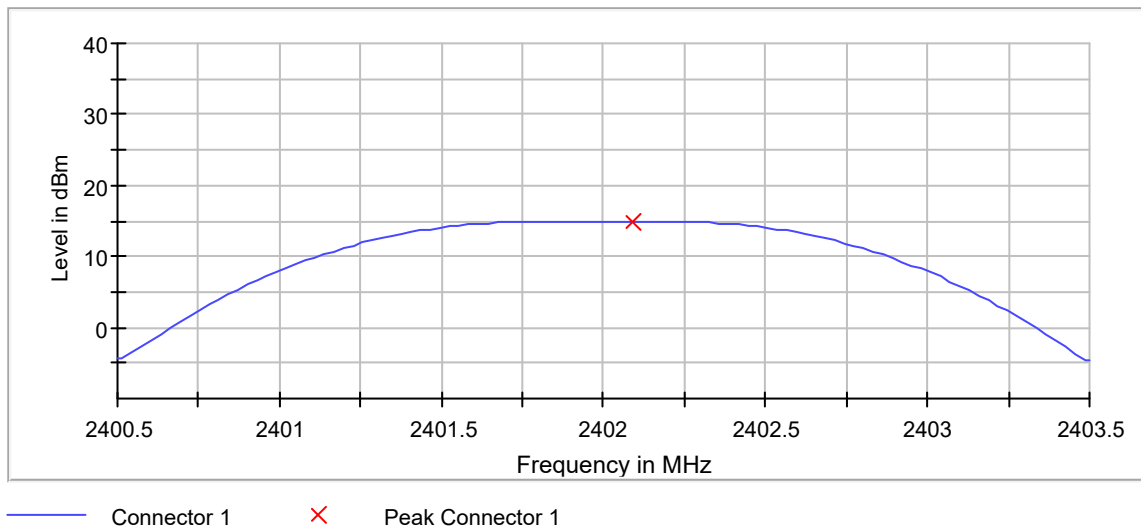

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40050 GHz	2.40050 GHz
Stop Frequency	2.40350 GHz	2.40350 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 831.685 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
Sweptime	4.210 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.50 dB

Peak Power Spectral Density (2402 MHz; 15.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2402.000000	2401.992500	5.203	8.0	PASS

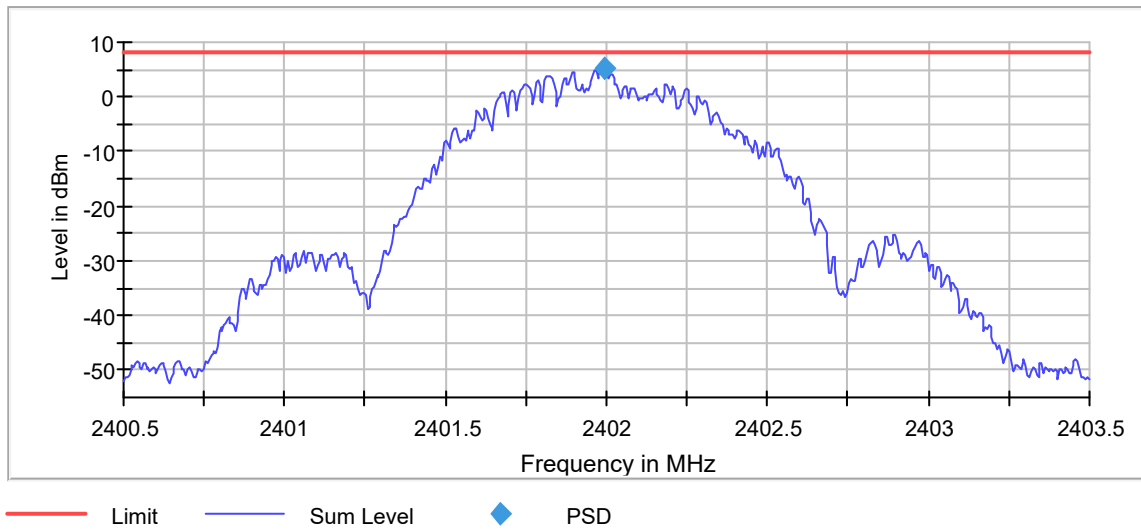

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40050 GHz	2.40050 GHz
Stop Frequency	2.40350 GHz	2.40350 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
Sweptime	3.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.07 dB	0.50 dB

Occupied Channel Bandwidth 99% (2402 MHz; 15.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.020000	---	---	2401.495000	2402.515000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

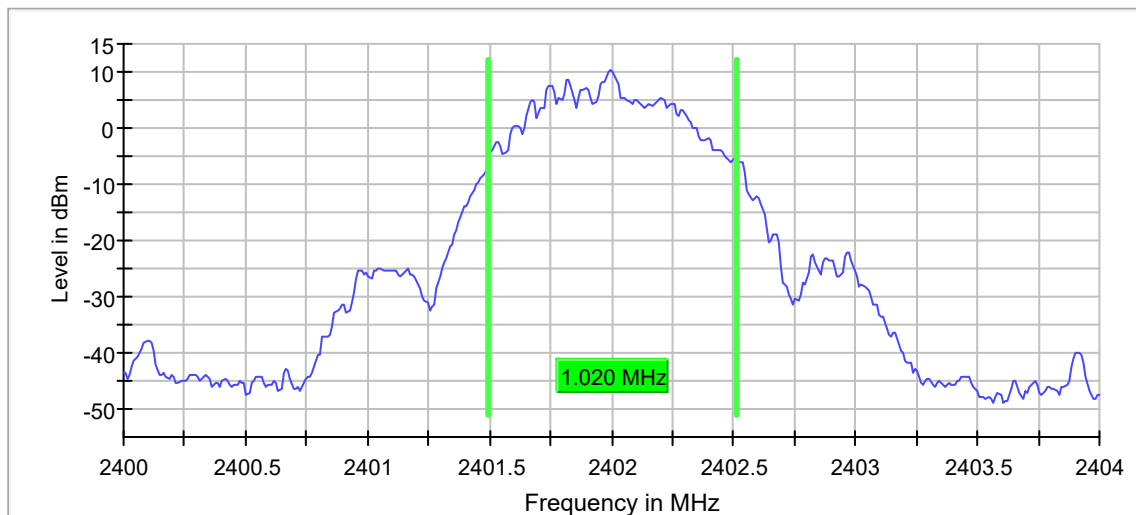

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweptime	210.000 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.01 dB	0.30 dB

Band Edge low (2402 MHz; 15.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2402.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2401.975000	14.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.825000	-34.8	28.9	-6.0	PASS
2399.975000	-35.3	29.3	-6.0	PASS
2399.925000	-35.5	29.5	-6.0	PASS
2399.875000	-35.5	29.5	-6.0	PASS
2399.775000	-35.7	29.7	-6.0	PASS
2399.725000	-37.8	31.8	-6.0	PASS
2399.675000	-37.9	31.9	-6.0	PASS
2399.625000	-39.1	33.1	-6.0	PASS
2398.175000	-39.3	33.3	-6.0	PASS
2399.575000	-39.3	33.4	-6.0	PASS
2399.425000	-40.1	34.1	-6.0	PASS
2398.225000	-40.1	34.1	-6.0	PASS
2399.375000	-40.2	34.2	-6.0	PASS
2399.475000	-40.2	34.2	-6.0	PASS
2398.125000	-40.3	34.3	-6.0	PASS

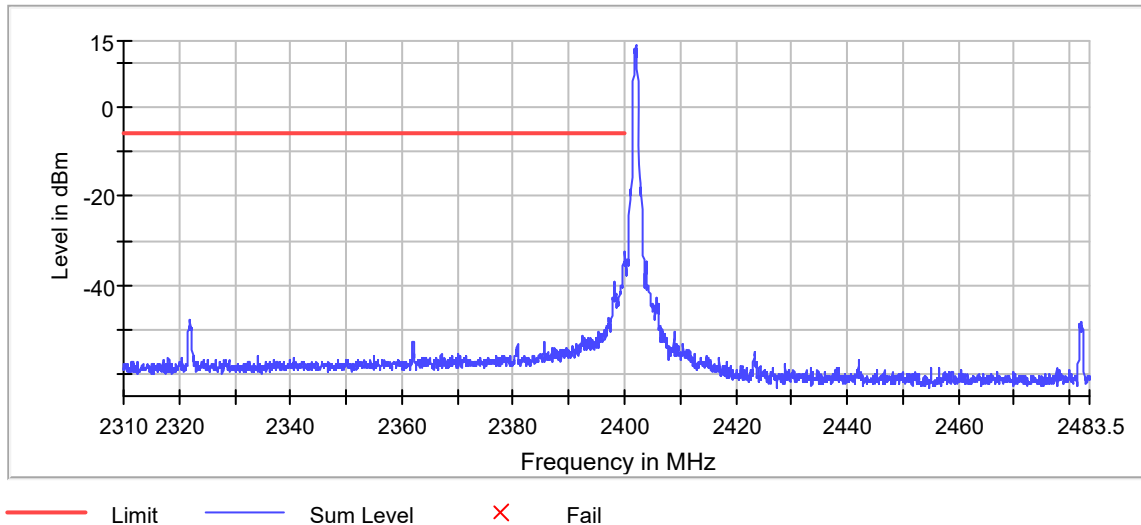


Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Measurement 2


Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.50 dB

Duty Cycle Correction Factor (2402 MHz; 15.000 dBm; 1 MHz)

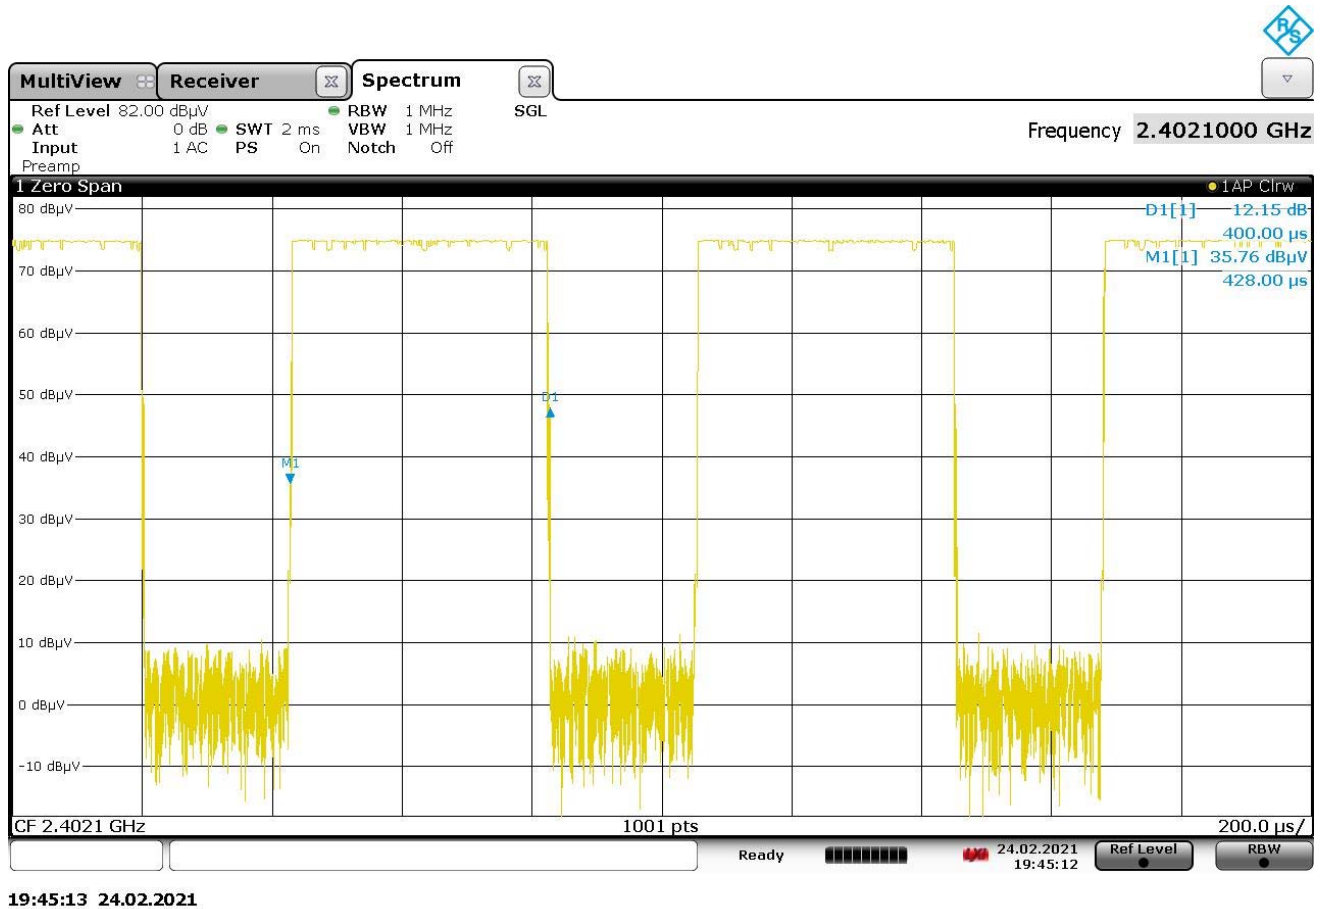

On Time = 400usec

Duty Cycle Correction Factor (2402 MHz; 15.000 dBm; 1 MHz)

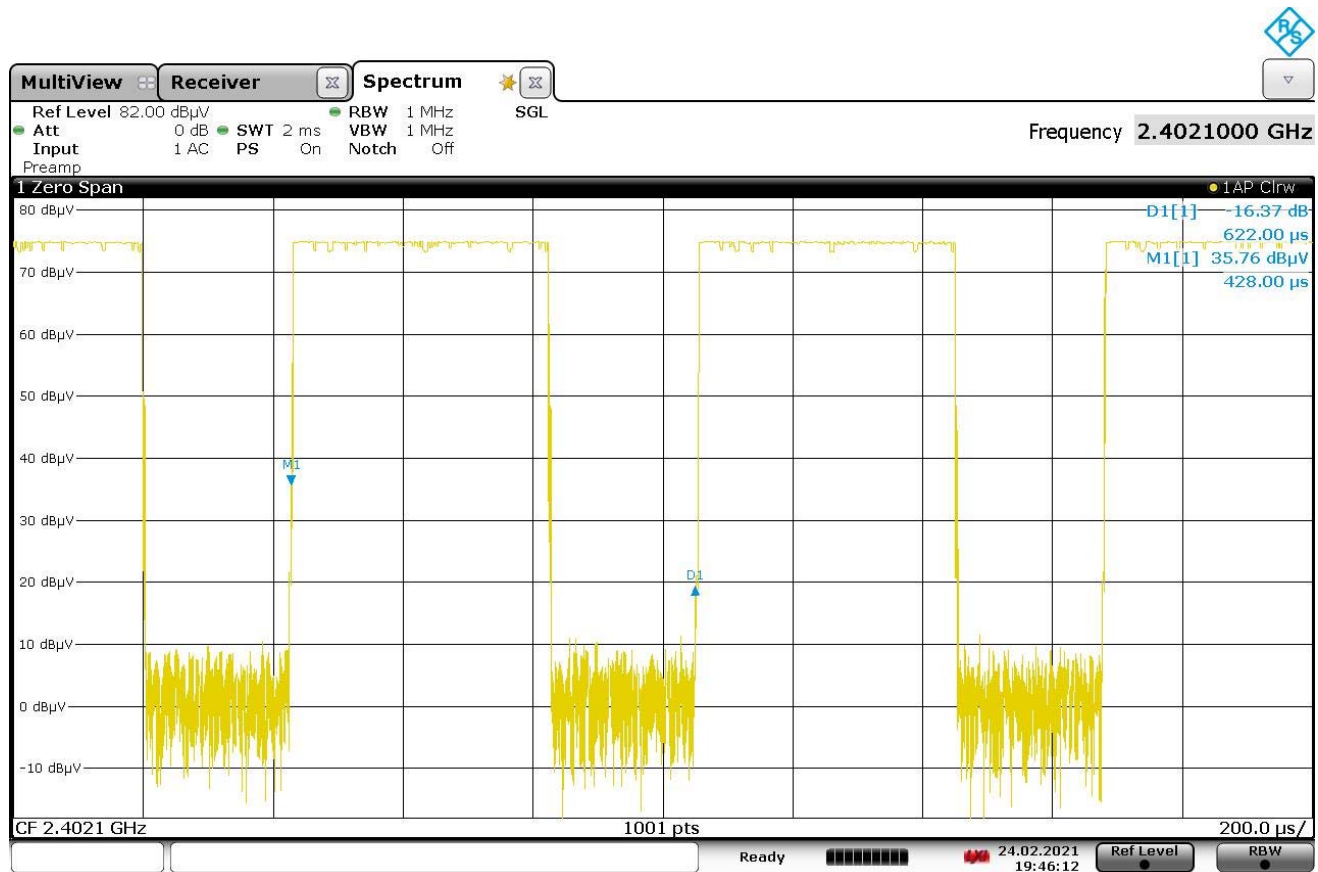

19:46:13 24.02.2021

Total Time = usec

Duty Cycle = $D = ((\text{On-time})/(\text{Word period})) = 400\text{usec}/622\text{usec} = 0.643$

Duty Cycle Correction Factor = $20 \log(1/D) = 20 \log(1/0.643) = 3.8\text{dB}$

Note: The duty cycle was the same for low, mid, and high channels

Minimum Emission Bandwidth 6 dB (2444 MHz; 15.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2444.000000	0.831684	0.500000	---	2443.564356	2444.396040

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2444.000000	13.1	PASS

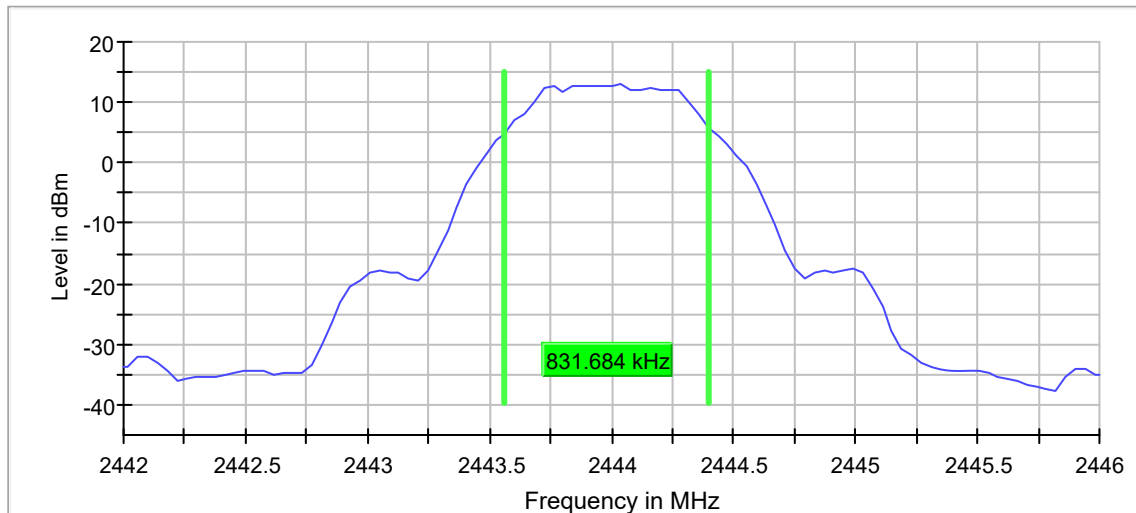

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.44600 GHz	2.44600 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweptime	41.830 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.26 dB	0.50 dB

Peak output power (Sweep) (2444 MHz; 15.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2444.000000	14.8	30.0	PASS

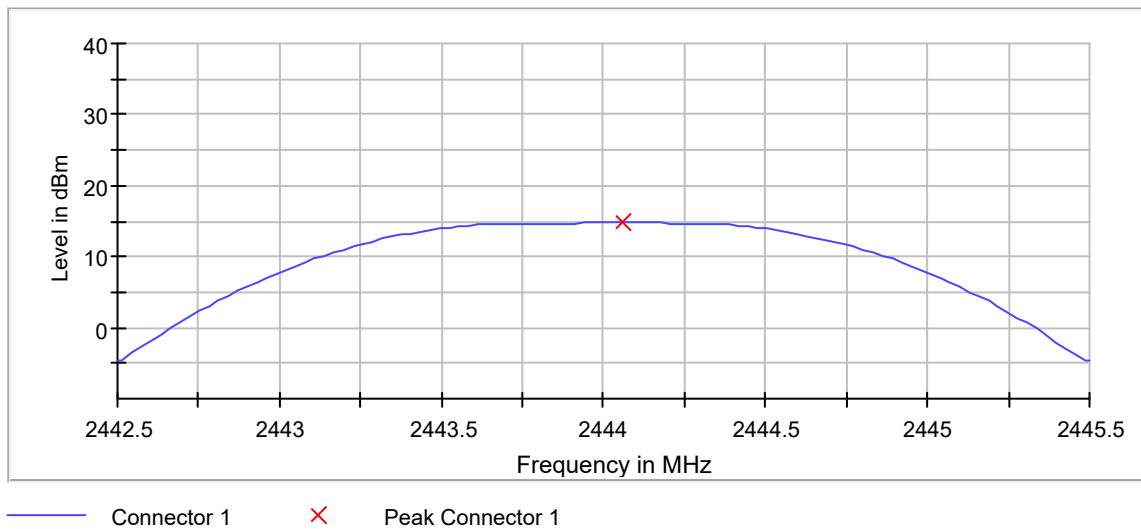

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44250 GHz	2.44250 GHz
Stop Frequency	2.44550 GHz	2.44550 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 831.685 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
Sweptime	4.210 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.05 dB	0.50 dB

Peak Power Spectral Density (2444 MHz; 15.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2444.000000	2443.992500	5.126	8.0	PASS

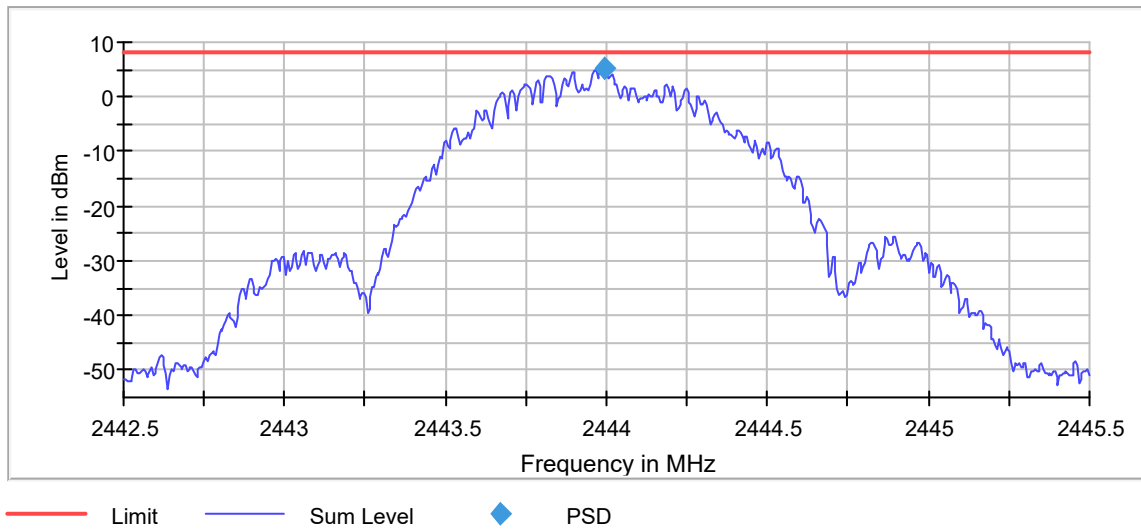

PSD Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44250 GHz	2.44250 GHz
Stop Frequency	2.44550 GHz	2.44550 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
Sweptime	3.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.13 dB	0.50 dB

Occupied Channel Bandwidth 99% (2444 MHz; 15.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2444.000000	1.020000	---	---	2443.495000	2444.515000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2444.000000	PASS

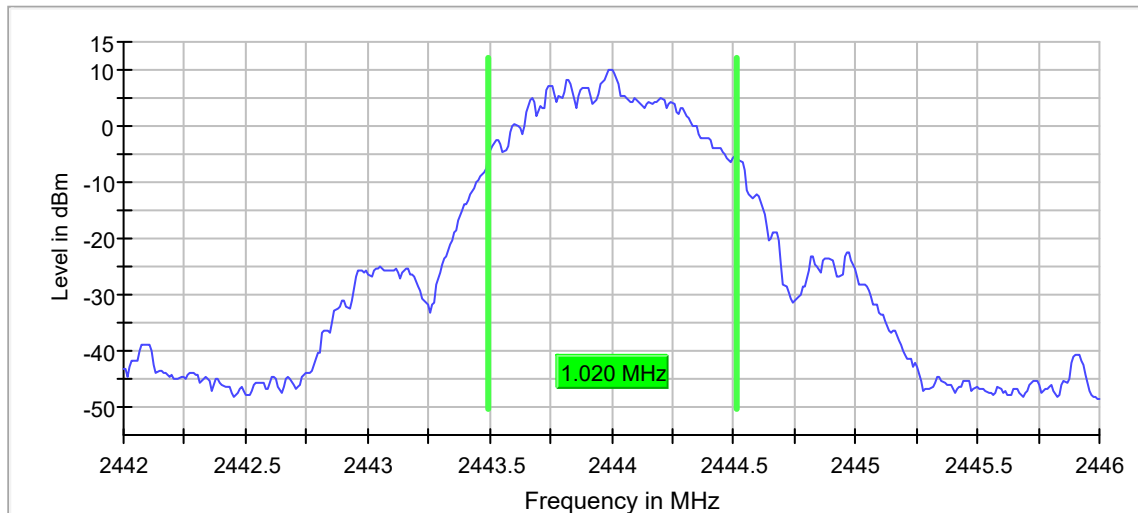

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.44600 GHz	2.44600 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	210.000 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2480 MHz; 15.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.831684	0.500000	---	2479.564356	2480.396040

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	13.4	PASS

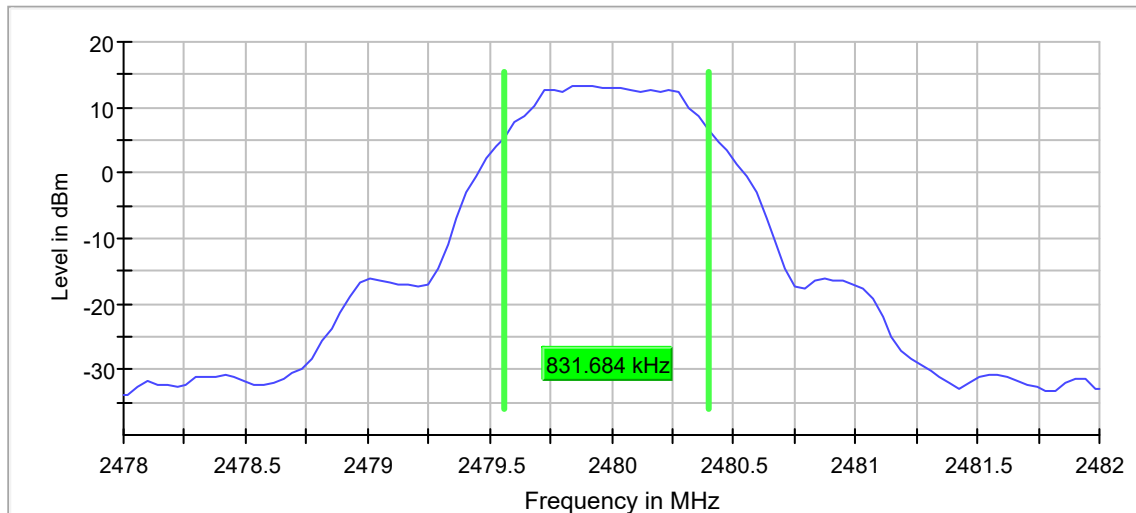

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	41.830 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.36 dB	0.50 dB

Peak output power (Sweep) (2480 MHz; 15.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2480.000000	15.7	30.0	PASS

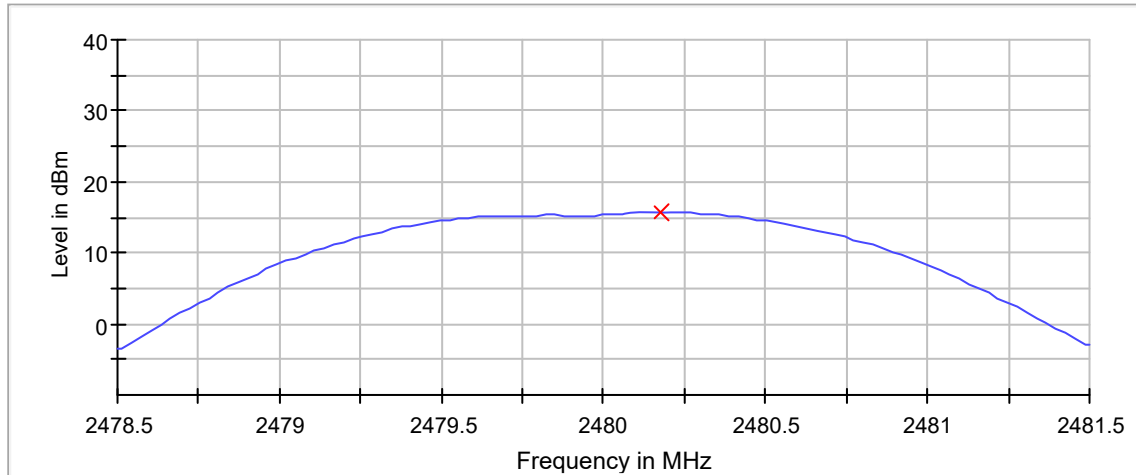

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47850 GHz	2.47850 GHz
Stop Frequency	2.48150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 831.685 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
SweepTime	4.210 µs	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.02 dB	0.50 dB

Peak Power Spectral Density (2480 MHz; 15.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2480.000000	2479.992500	5.342	8.0	PASS

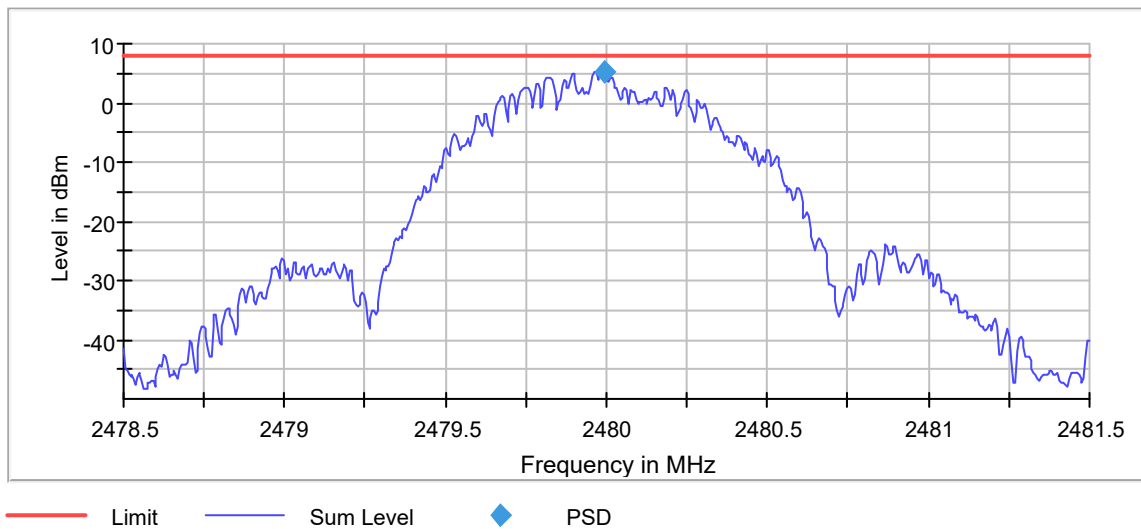

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47850 GHz	2.47850 GHz
Stop Frequency	2.48150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
SweepTime	3.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.11 dB	0.50 dB

Occupied Channel Bandwidth 99% (2480 MHz; 15.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.020000	---	---	2479.495000	2480.515000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

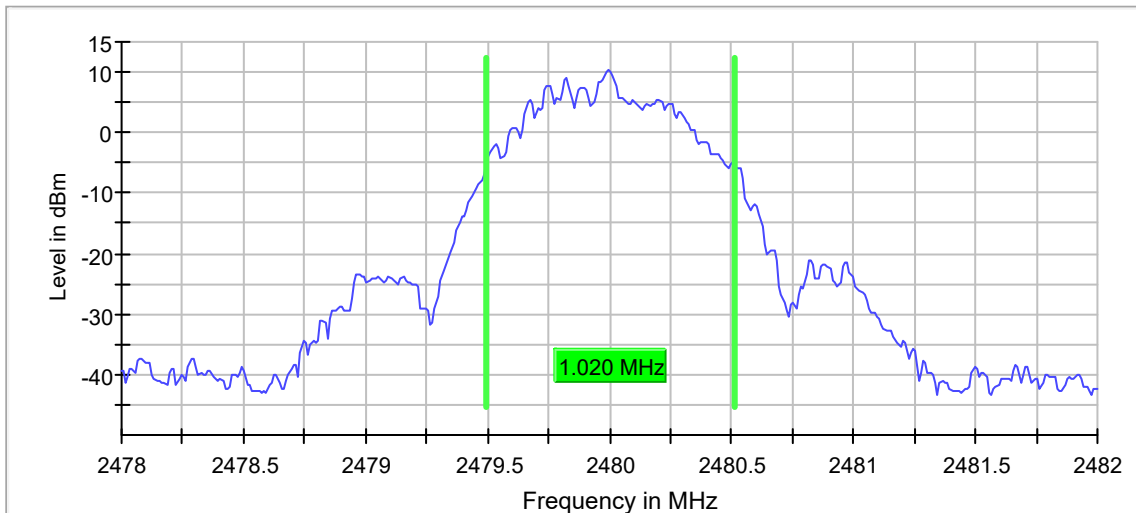

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	210.000 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

Bluetooth, 2MHz, Power = Hex 14

Minimum Emission Bandwidth 6 dB (2402 MHz; 15.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.227722	0.500000	---	2401.366337	2402.594059

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	11.8	PASS

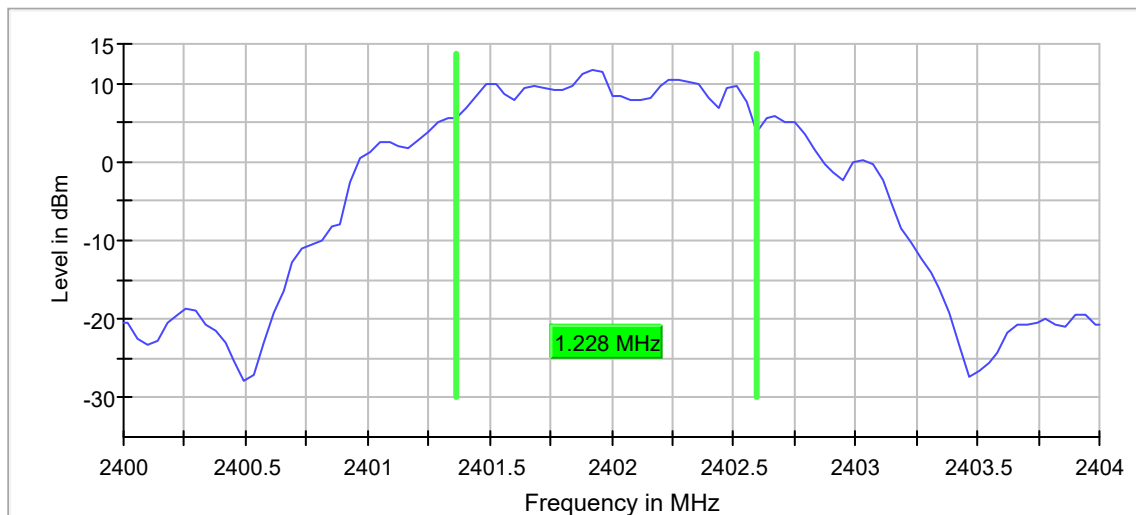

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweptime	41.830 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.01 dB	0.50 dB

Peak output power (Sweep) (2402 MHz; 15.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	15.9	30.0	PASS

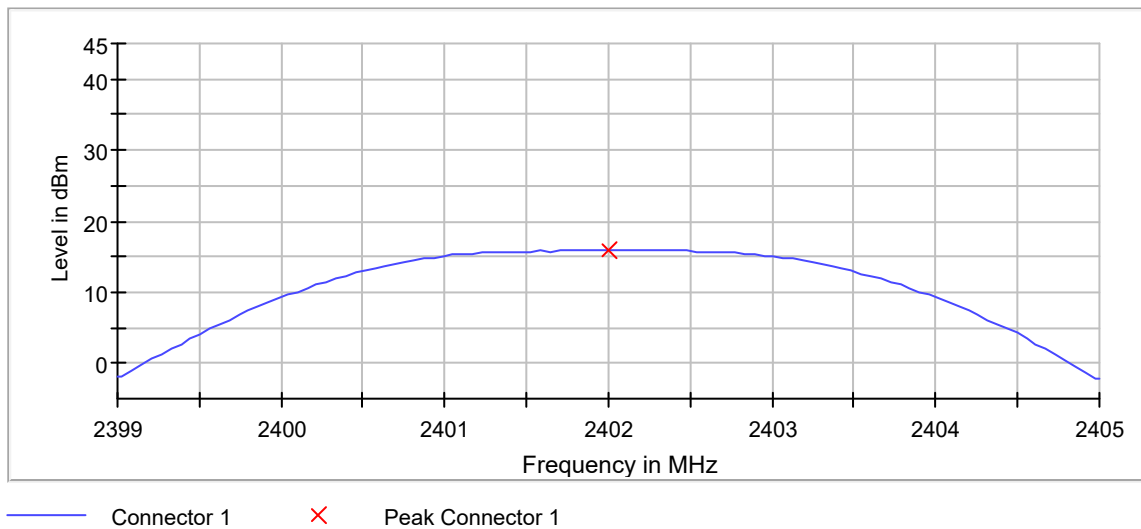

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39900 GHz	2.39900 GHz
Stop Frequency	2.40500 GHz	2.40500 GHz
Span	6.000 MHz	6.000 MHz
RBW	2.000 MHz	≥ 1.228 MHz
VBW	10.000 MHz	≥ 6.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.03 dB	0.50 dB

Peak Power Spectral Density (2402 MHz; 15.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2402.000000	2402.498999	4.999	8.0	PASS

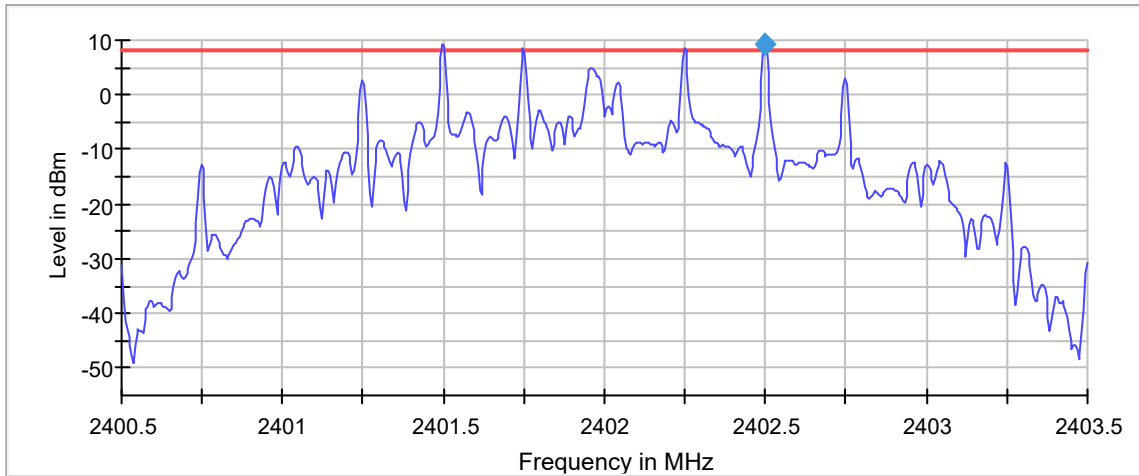

— Limit — Sum Level ◆ PSD

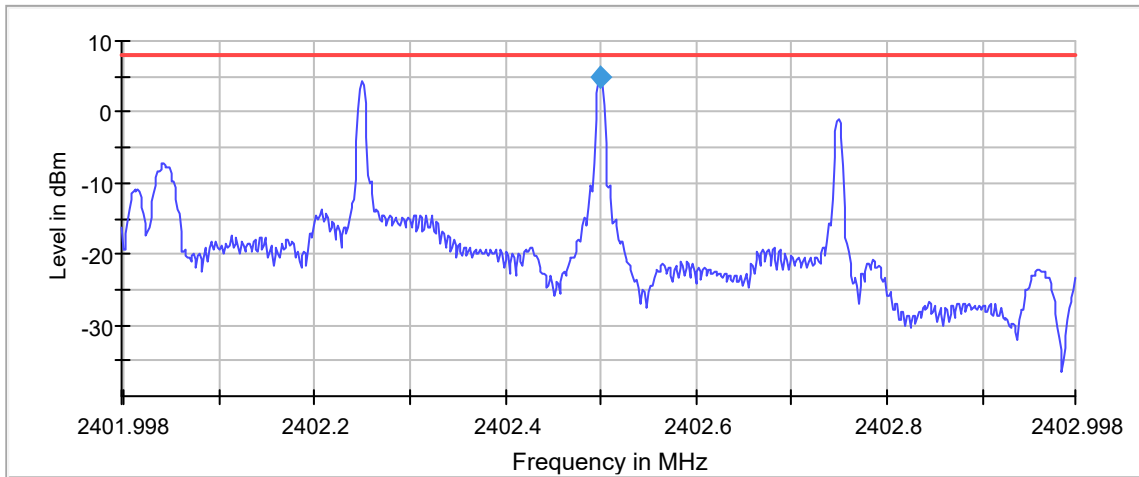

— Limit — Sum Level ◆ PSD

PSD Connector 1 2nd

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40050 GHz	2.40050 GHz
Stop Frequency	2.40350 GHz	2.40350 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
SweepTime	3.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	3 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.21 dB	0.50 dB

2nd Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40200 GHz	2.40200 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	1.000 MHz	1.000 MHz
RBW	3.000 kHz	<= 3.000 kHz
VBW	10.000 kHz	>= 9.000 kHz
SweepPoints	667	~ 667
SweepTime	11.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	10	10
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	3 / max. 150	max. 150
Stable	1 / 1	1
Max Stable Difference	0.14 dB	0.50 dB

Occupied Channel Bandwidth 99% (2402 MHz; 15.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	2.000000	---	---	2401.025000	2403.025000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

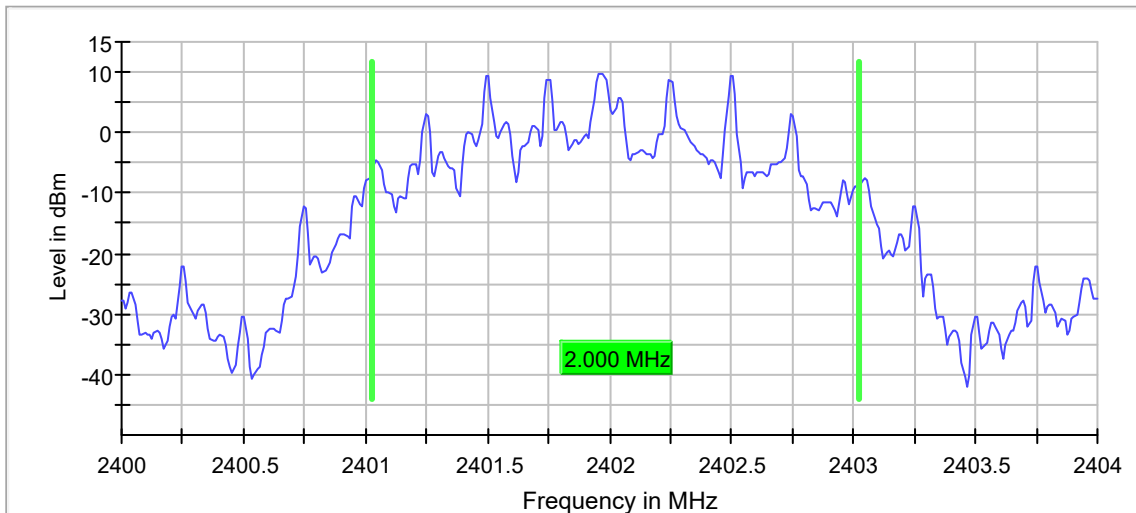

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweptime	210.000 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.03 dB	0.30 dB

Band Edge low (2402 MHz; 15.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013

Result


DUT Frequency (MHz)	Result
2402.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2401.975000	14.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-15.4	10.2	-5.2	PASS
2399.925000	-17.1	11.9	-5.2	PASS
2399.875000	-19.3	14.1	-5.2	PASS
2399.825000	-24.0	18.8	-5.2	PASS
2399.775000	-26.4	21.2	-5.2	PASS
2399.725000	-27.2	22.0	-5.2	PASS
2399.675000	-29.5	24.3	-5.2	PASS
2399.625000	-30.9	25.7	-5.2	PASS
2399.575000	-35.3	30.1	-5.2	PASS
2399.525000	-36.6	31.4	-5.2	PASS
2399.475000	-37.6	32.4	-5.2	PASS
2399.275000	-38.5	33.3	-5.2	PASS
2399.225000	-38.5	33.3	-5.2	PASS
2399.325000	-38.6	33.4	-5.2	PASS
2399.175000	-39.3	34.1	-5.2	PASS

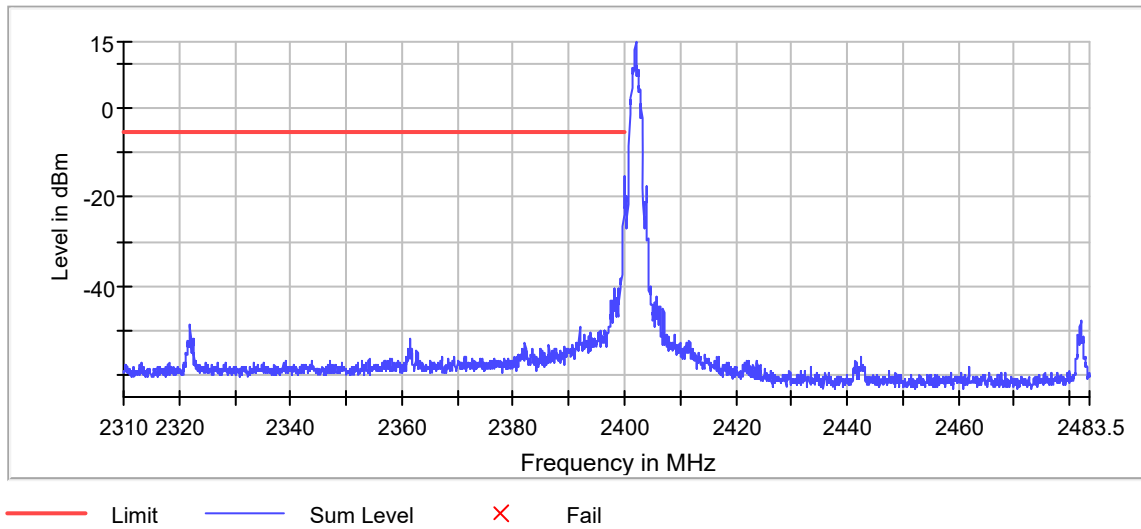

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweptime	1.670 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.01 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2444 MHz; 15.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2444.000000	1.227722	0.500000	---	2443.366337	2444.594059

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2444.000000	11.9	PASS

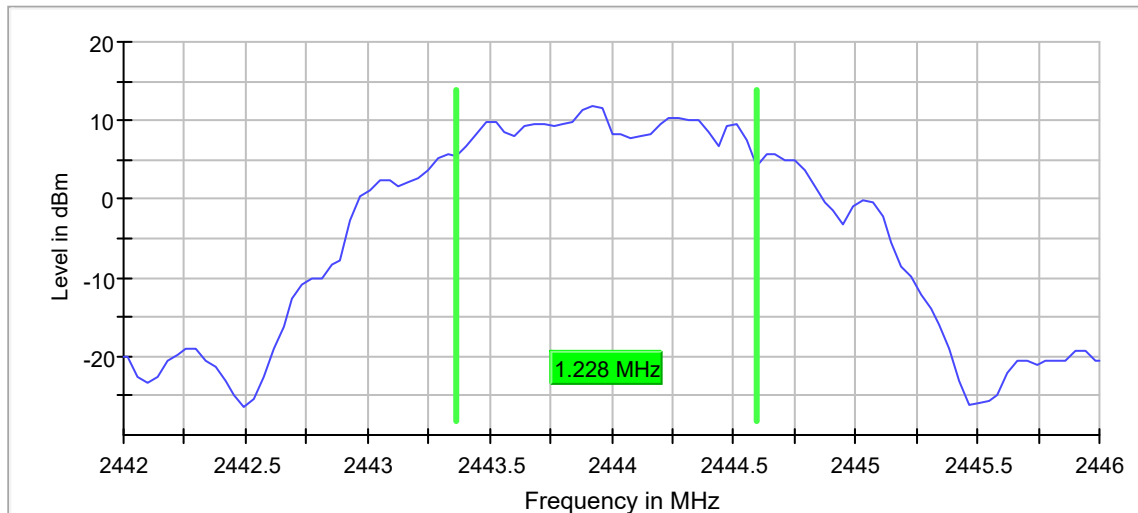

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.44600 GHz	2.44600 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	41.830 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.05 dB	0.50 dB

Peak output power (Sweep) (2444 MHz; 15.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2444.000000	15.9	30.0	PASS

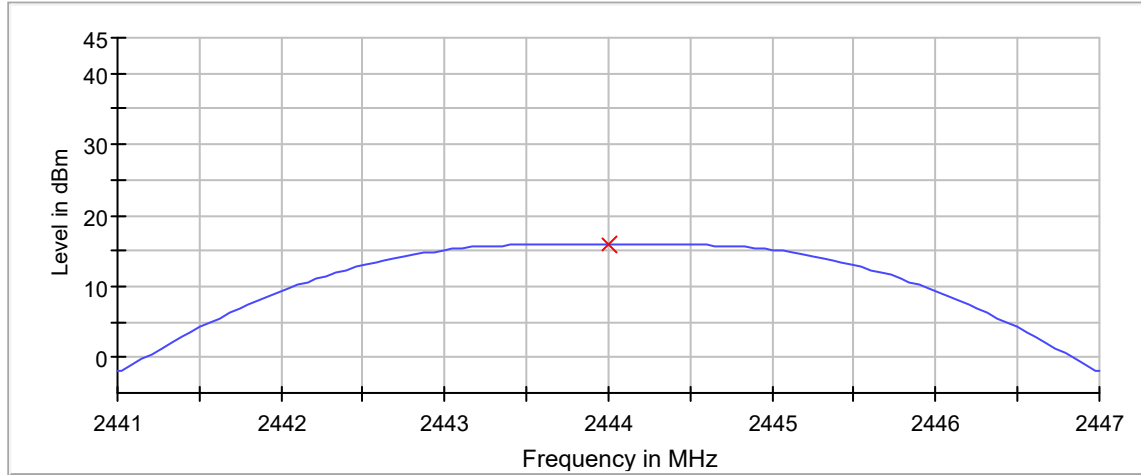

— Connector 1 X Peak Connector 1

Peak Power 1

Measurement



Setting	Instrument Value	Target Value
Start Frequency	2.44100 GHz	2.44100 GHz
Stop Frequency	2.44700 GHz	2.44700 GHz
Span	6.000 MHz	6.000 MHz
RBW	2.000 MHz	>= 1.228 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

Peak Power Spectral Density (2444 MHz; 15.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2444.000000	2444.498999	4.940	8.0	PASS

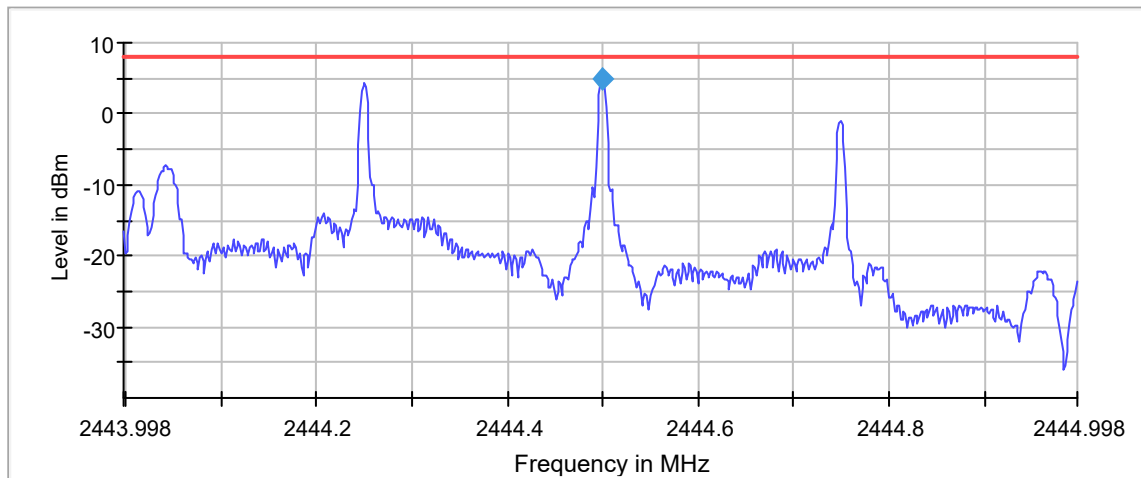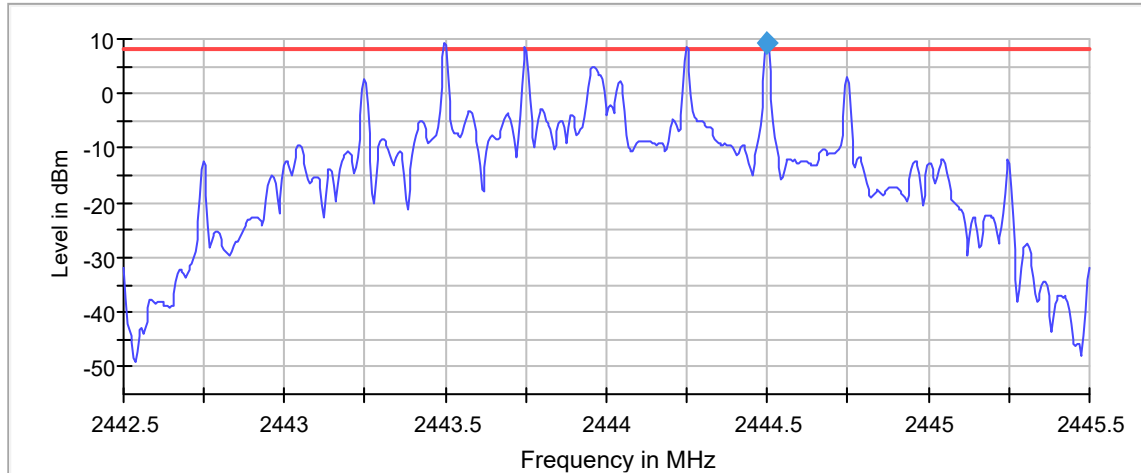

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44250 GHz	2.44250 GHz
Stop Frequency	2.44550 GHz	2.44550 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
SweepTime	3.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	3 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.04 dB	0.50 dB

2nd Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44400 GHz	2.44400 GHz
Stop Frequency	2.44500 GHz	2.44500 GHz
Span	1.000 MHz	1.000 MHz
RBW	3.000 kHz	<= 3.000 kHz
VBW	10.000 kHz	>= 9.000 kHz
SweepPoints	667	~ 667
SweepTime	11.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	10	10
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	3 / max. 150	max. 150
Stable	1 / 1	1
Max Stable Difference	0.48 dB	0.50 dB

Occupied Channel Bandwidth 99% (2444 MHz; 15.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2444.000000	2.010000	---	---	2443.015000	2445.025000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2444.000000	PASS

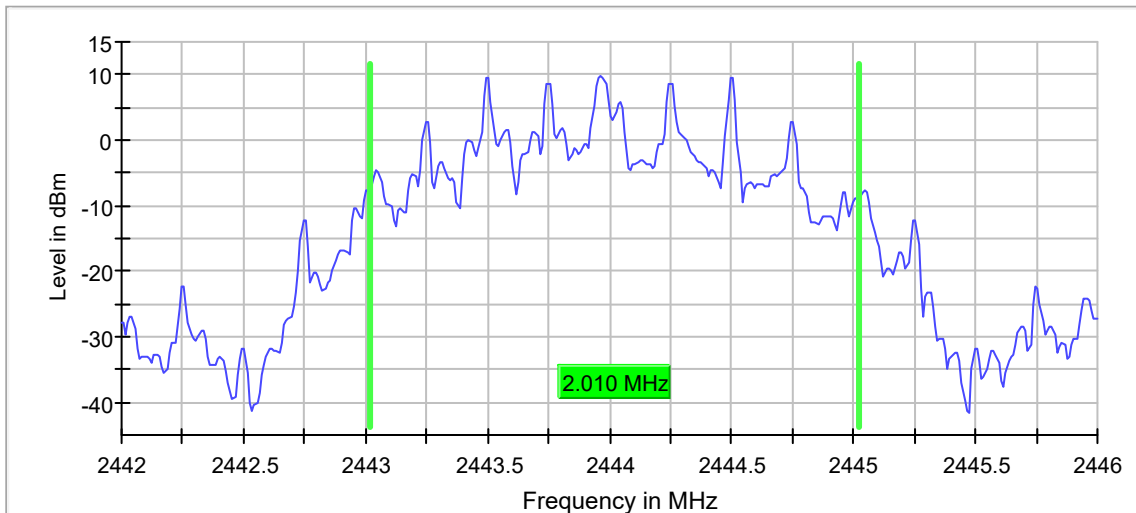

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.44600 GHz	2.44600 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	210.000 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.30 dB

Minimum Emission Bandwidth 6 dB (2480 MHz; 15.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.227722	0.500000	---	2479.366337	2480.594059

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	12.5	PASS

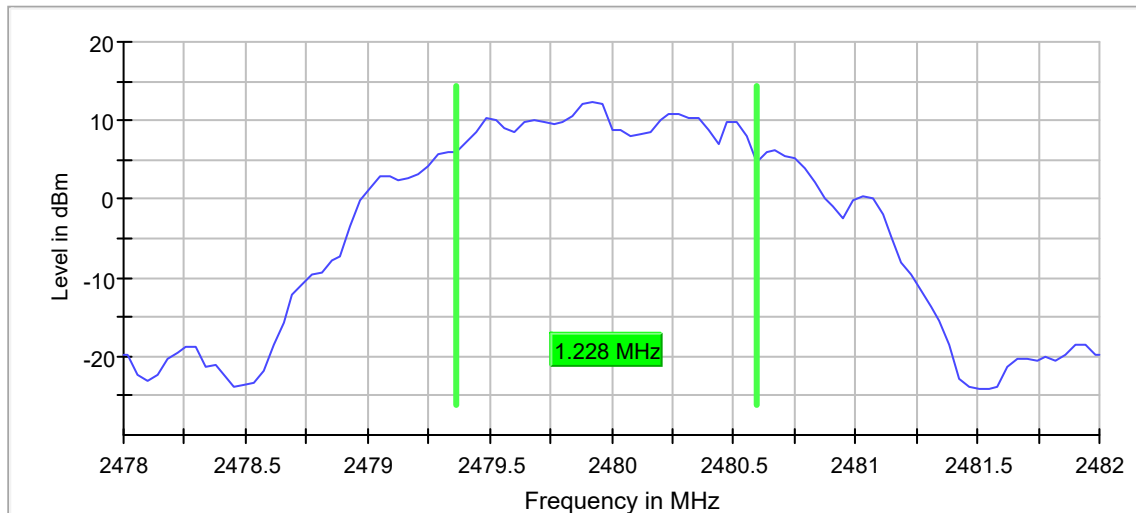

Bandwidth

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweptime	41.830 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.13 dB	0.50 dB

Peak output power (Sweep) (2480 MHz; 15.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.1.1

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2480.000000	16.8	30.0	PASS

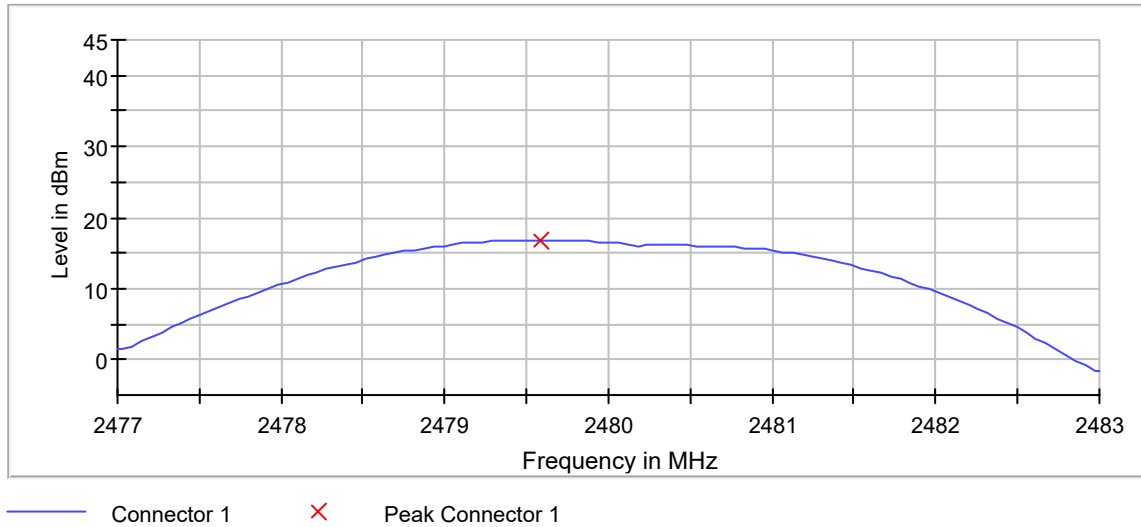

Peak Power 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47700 GHz	2.47700 GHz
Stop Frequency	2.48300 GHz	2.48300 GHz
Span	6.000 MHz	6.000 MHz
RBW	2.000 MHz	>= 1.228 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	101	~ 101
Sweptime	1.000 ms	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	35.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.50 dB

Peak Power Spectral Density (2480 MHz; 15.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2480.000000	2480.498999	5.369	8.0	PASS

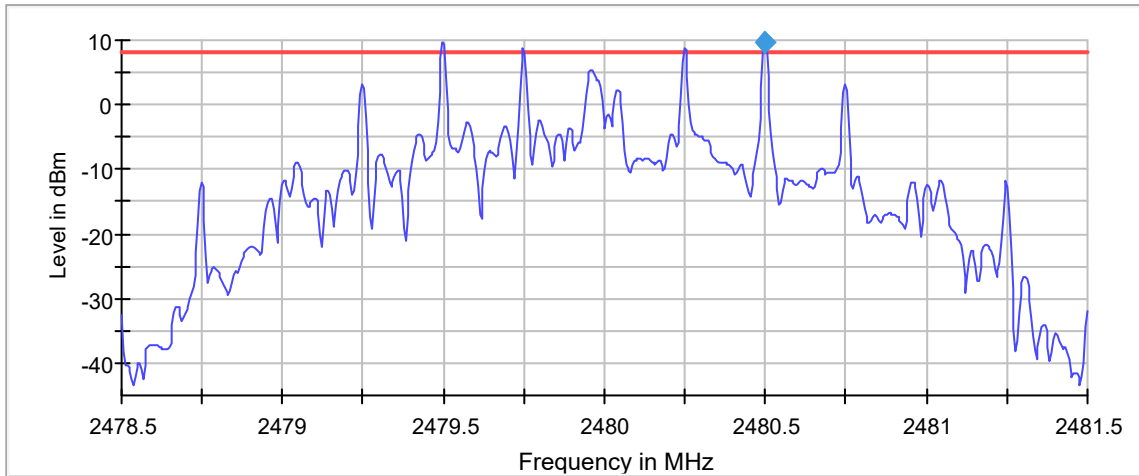

— Limit — Sum Level ◆ PSD

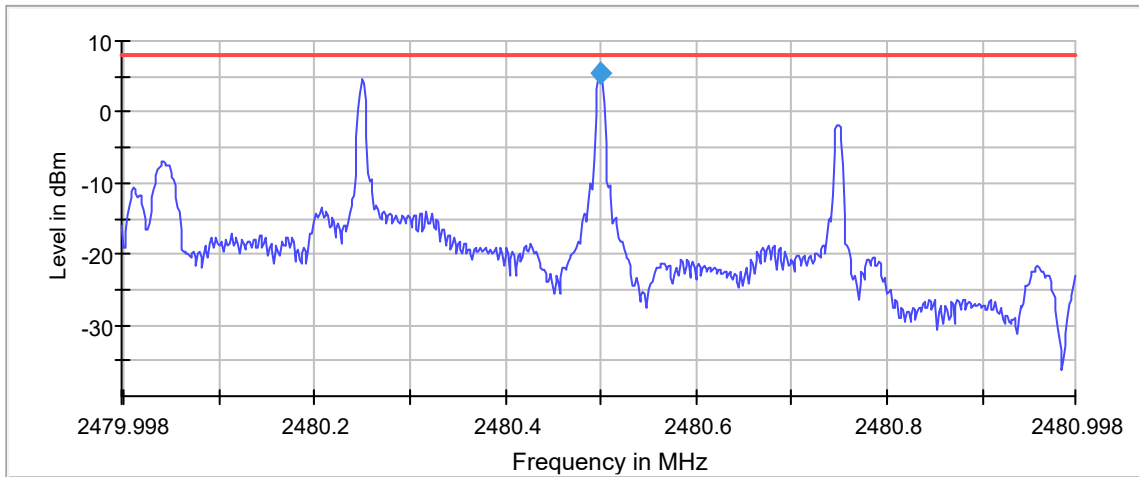

— Limit — Sum Level ◆ PSD

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47850 GHz	2.47850 GHz
Stop Frequency	2.48150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
SweepTime	3.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	3 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.06 dB	0.50 dB

2nd Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.48000 GHz	2.48000 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	1.000 MHz	1.000 MHz
RBW	3.000 kHz	<= 3.000 kHz
VBW	10.000 kHz	>= 9.000 kHz
SweepPoints	667	~ 667
SweepTime	11.200 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	10	10
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	3 / max. 150	max. 150
Stable	1 / 1	1
Max Stable Difference	0.33 dB	0.50 dB

Occupied Channel Bandwidth 99% (2480 MHz; 15.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	2.010000	---	---	2479.015000	2481.025000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

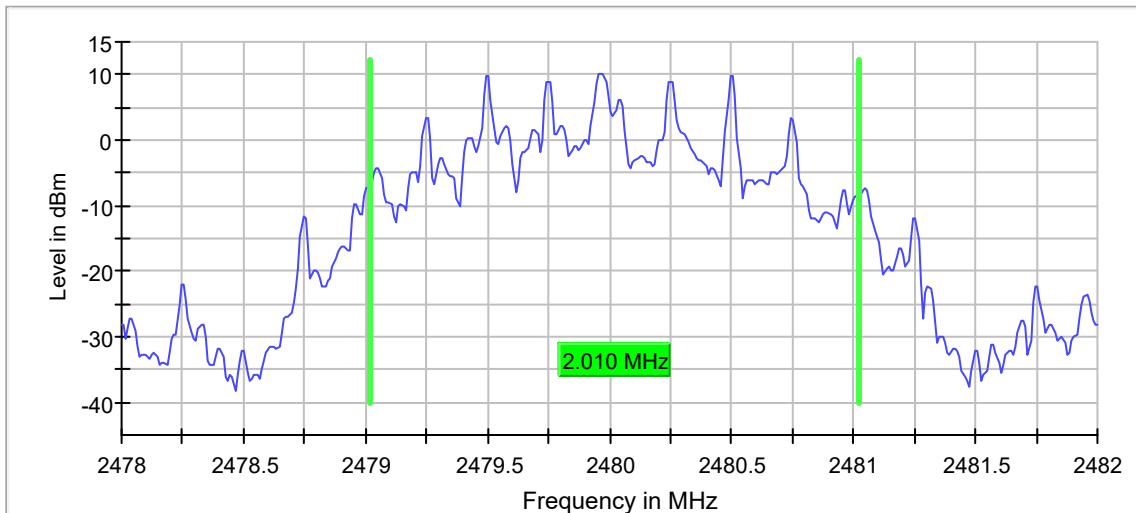

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	210.000 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	25.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.30 dB

22. Radiated Emissions Tests

Test Information	
Manufacturer	California Eastern Laboratories
Product	WiFi/BLE module
Model	CMP4010
Serial No	41 for the board (31 for the module)
Mode	

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
<u>Peak EIRP:</u> Per FCC 15.247, Section (b)(3) and ISSED RSS-247, Section 5.4(d), for systems using digital modulation, the maximum peak conducted output power shall not exceed 1 watt. Per FCC 15.247, Section (b)(4), and ISSED RSS-247, Section 5.4(d), the conducted output power limit is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<u>Radiated Emissions Not In Restricted Bands:</u> Per FCC 15.247, Section (d), and ISSED RSS-247, Section 5.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated emissions measurement. Attenuation below the general limits specified in §15.209(a) is not required.
<u>Radiated Emissions In Restricted Bands:</u> Per 15.247, Section (d), radiated emissions which fall in the restricted bands, as defined in FCC 15.205, Section (a), must comply with the radiated emission limits specified in FCC 15.209, Section (a). Per ISSED RSS-247, Section 3.3, radiated emissions which fall in the restricted bands, as defined in ISSED

RSS-Gen, Section 8.10, must comply with the radiated emission limits specified in RSS-Gen, Section 8.9.

High Band Edge:

Per 15.247, Section (d), radiated emissions which fall in the restricted band beginning at 2483.5MHz, as defined in FCC 15.205, Section (a), must comply with the radiated emission limits specified in FCC 15.209, Section (a).

Per ISSED RSS-247, Section 3.3, radiated emissions which fall in the restricted band beginning at 2483.5MHz, as defined in ISSED RSS-Gen, Section 8.10, must comply with the radiated emission limits specified in RSS-Gen, Section 8.9.

Procedures

Peak EIRP:

C63.10 Annex G and Section 11.9.1.1:

The EUT was placed on a 1.5 meter high non-conductive stand and set to transmit. A double ridged waveguide antenna was placed at a test distance of 3 meters from the EUT.

a) The following settings were employed on the EMI Test Receiver:

- | | |
|------------------------------|--|
| 1) Center Frequency | = Transmit frequency of EUT |
| 2) Span | $\geq 3 \times \text{RBW}$ |
| 3) RBW | $\geq \text{DTS Bandwidth}$ |
| 4) VBW | $\geq 3 \times \text{RBW}$ |
| 5) Number of points in sweep | $\geq (2 \times \text{span} / \text{RBW})$ |
| 6) Sweep time | = Auto |
| 7) Detector | = Peak |
| 8) Trace | = Max hold |

b) Allow trace to stabilize

c) Use peak marker function to determine the peak amplitude level.

The equivalent power was determined using equation G.1 in C63.10 to convert field intensity levels measured at 3 meters into EIRP readings.

Radiated Emissions Not In Restricted Bands:

C63.10-2013 Section 11.11

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 25GHz was investigated using a peak detector function.

The final radiated emission tests were then manually performed over the frequency range of 30MHz to 25GHz.

- a) The field strength of the fundamental was measured using a double ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand and set to transmit. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand and set to transmit. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) All harmonics not in the restricted bands must be at least 20 dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.

Radiated Emissions In Restricted Bands:

C63.10-2013 Section 11.12

- a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on an 80 cm high non-conductive stand and set to transmit. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand and set to transmit. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).

- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken. The duty cycle correction $[(DCCF) = 20 \log (1/D)]$ factor was added to the measurement results.


High Band Edge:

C63.10-2013 section 6.10.5:

- a) The EUT was set to transmit continuously at the channel closest to the high band-edge.
- b) The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand and set to transmit. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
- d) The peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).
- e) Next, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken. The duty cycle correction $[(DCCF) = 20 \log (1/D)]$ factor was added to the measurement results.



Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Horizontal

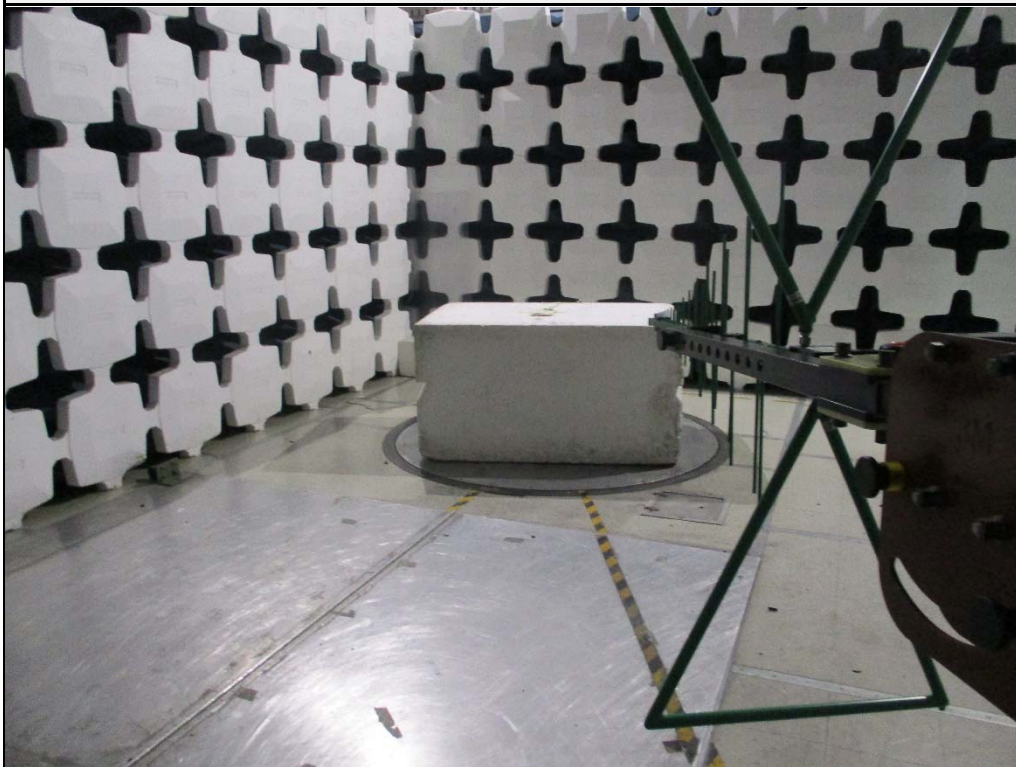

Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Vertical



Test Setup for Spurious Radiated Emissions, 1GHz to 18GHz – Antenna
Polarization Horizontal



Test Setup for Spurious Radiated Emissions, 1GHz to 18GHz – Antenna
Polarization Vertical



Test Setup for Spurious Radiated Emissions, 18GHz to 25GHz – Antenna
Polarization Vertical

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	41 for the board (31 for the module)
Mode	802.11b, 11MBPS
Transmit Frequency	See Below
Parameters	Peak EIRP
Notes	

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	EIRP (dBm)	Limit (dBm)	Margin (dBm)
2412.00	H	80.8	3.4	32.3	0.0	116.5	21.5	36.0	-14.5
2412.00	V	76.8	3.4	32.3	0.0	112.5	17.5	36.0	-18.5
2437.00	H	81.0	3.5	32.5	0.0	117.0	22.0	36.0	-14.0
2437.00	V	74.4	3.5	32.5	0.0	110.4	15.4	36.0	-20.6
2472.00	H	75.9	3.5	32.6	0.0	111.9	16.9	36.0	-19.1
2472.00	V	72.4	3.5	32.6	0.0	108.4	13.4	36.0	-22.6

Peak Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB/m) + Pre Amp (dB)

EIRP (dBm) = Peak/Avg. Total (dBuV/m) – 95dB

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	41 for the board (31 for the module)
Mode	802.11g, 54MBPS
Transmit Frequency	See Below
Parameters	Peak EIRP
Notes	

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	EIRP (dBm)	Limit (dBm)	Margin (dBm)
2412.00	H	85.1	3.4	32.3	0.0	120.8	25.8	36.0	-10.2
2412.00	V	80.7	3.4	32.3	0.0	116.4	21.4	36.0	-14.6
2437.00	H	86.7	3.5	32.5	0.0	122.7	27.7	36.0	-8.3
2437.00	V	83.0	3.5	32.5	0.0	119.0	24.0	36.0	-12.0
2472.00	H	71.9	3.5	32.6	0.0	107.9	12.9	36.0	-23.1
2472.00	V	67.1	3.5	32.6	0.0	103.1	8.1	36.0	-27.9

Peak Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB/m) + Pre Amp (dB)

EIRP (dBm) = Peak/Avg. Total (dBuV/m) – 95dB

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	41 for the board (31 for the module)
Mode	802.11n, 20MHz, MCS6
Transmit Frequency	See Below
Parameters	Peak EIRP
Notes	

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	EIRP (dBm)	Limit (dBm)	Margin (dBm)
2412.00	H	84.5	3.4	32.3	0.0	120.2	25.2	36.0	-10.8
2412.00	V	81.9	3.4	32.3	0.0	117.6	22.6	36.0	-13.4
2437.00	H	85.4	3.5	32.5	0.0	121.4	26.4	36.0	-9.6
2437.00	V	80.5	3.5	32.5	0.0	116.5	21.5	36.0	-14.5
2472.00	H	71.8	3.5	32.6	0.0	107.8	12.8	36.0	-23.2
2472.00	V	68.0	3.5	32.6	0.0	104.0	9.0	36.0	-27.0

Peak Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB/m) + Pre Amp (dB)

EIRP (dBm) = Peak/Avg. Total (dBuV/m) – 95dB

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	41 for the board (31 for the module)
Mode	802.11n, 40MHz, MCS0
Transmit Frequency	See Below
Parameters	Peak EIRP
Notes	

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	EIRP (dBm)	Limit (dBm)	Margin (dBm)
2422.00	H	86.8	3.5	32.4	0.0	122.6	27.6	36.0	-8.4
2422.00	V	81.5	3.5	32.4	0.0	117.3	22.3	36.0	-13.7
2437.00	H	86.0	3.5	32.5	0.0	122.0	27.0	36.0	-9.0
2437.00	V	81.6	3.5	32.5	0.0	117.6	22.6	36.0	-13.4
2452.00	H	85.7	3.5	32.6	0.0	121.8	26.8	36.0	-9.2
2452.00	V	83.0	3.5	32.6	0.0	119.1	24.1	36.0	-11.9

Peak Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB/m) + Pre Amp (dB)


EIRP (dBm) = Peak/Avg. Total (dBuV/m) – 95dB


Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	41 for the board (31 for the module)
Mode	Bluetooth, 1MHz
Transmit Frequency	See Below
Parameters	Peak EIRP
Notes	


Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	EIRP (dBm)	Limit (dBm)	Margin (dBm)
2402.00	H	75.0	3.4	32.2	0.0	110.6	15.6	36.0	-20.4
2402.00	V	70.4	3.4	32.2	0.0	106.0	11.0	36.0	-25.0
2444.00	H	76.4	3.5	32.6	0.0	112.4	17.4	36.0	-18.6
2444.00	V	72.6	3.5	32.6	0.0	108.6	13.6	36.0	-22.4
2480.00	H	75.1	3.5	32.5	0.0	111.1	16.1	36.0	-19.9
2480.00	V	71.1	3.5	32.5	0.0	107.1	12.1	36.0	-23.9


Peak Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB/m) + Pre Amp (dB)


EIRP (dBm) = Peak/Avg. Total (dBuV/m) – 95dB

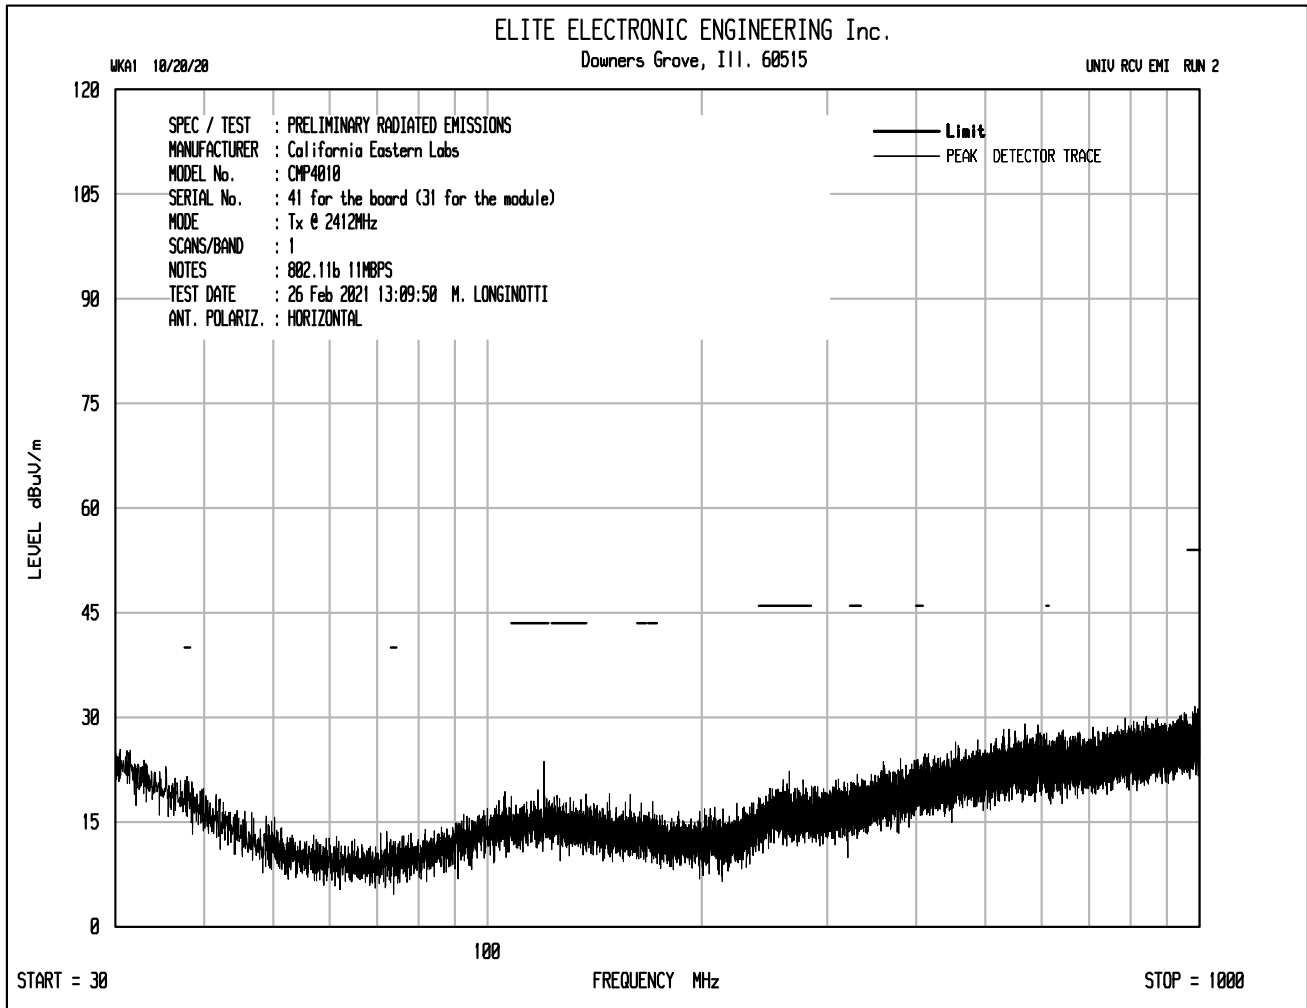


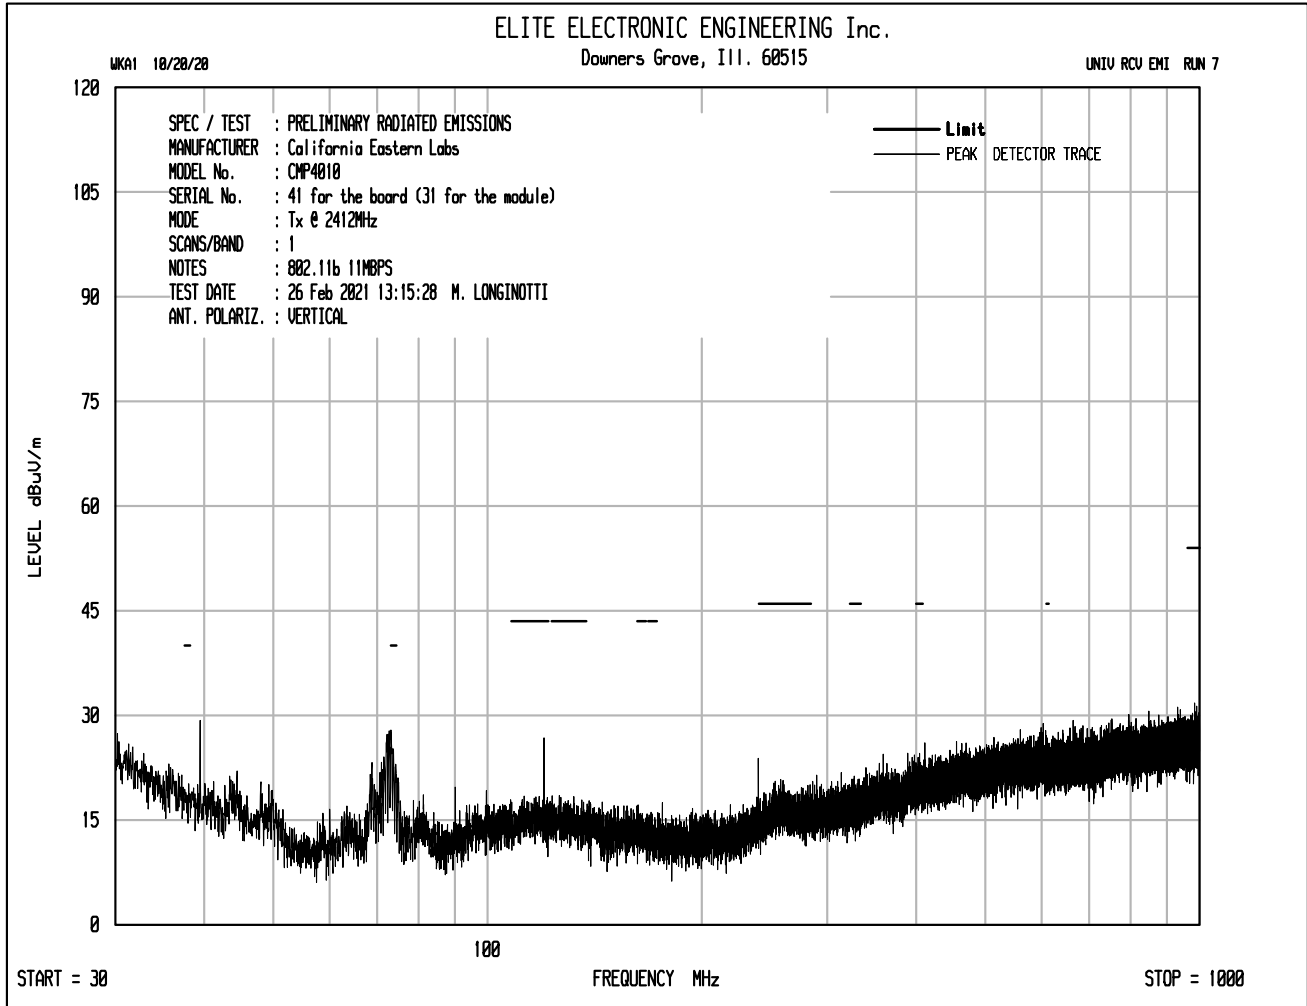


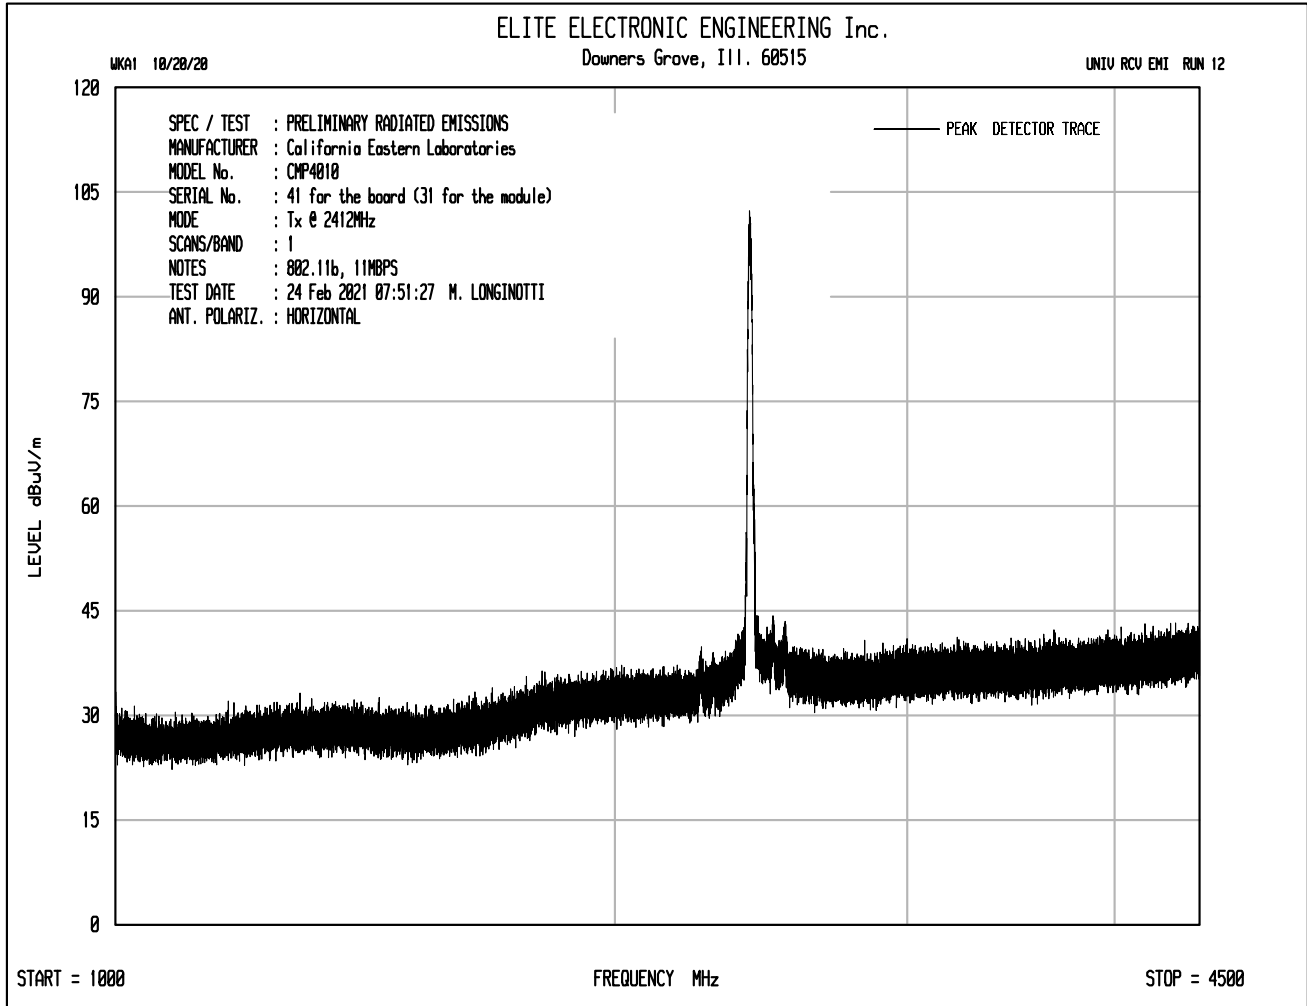


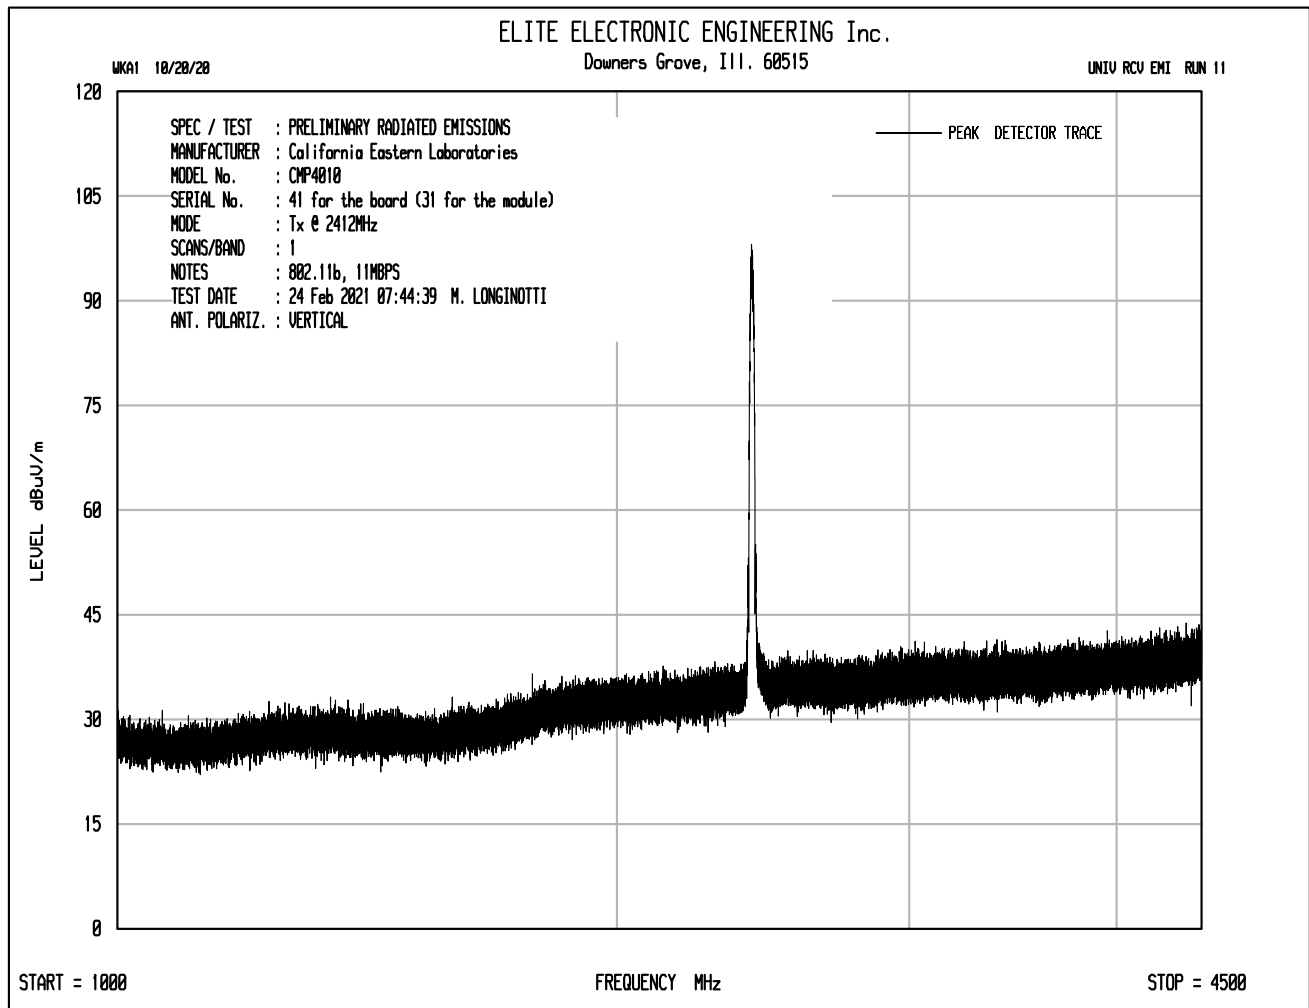

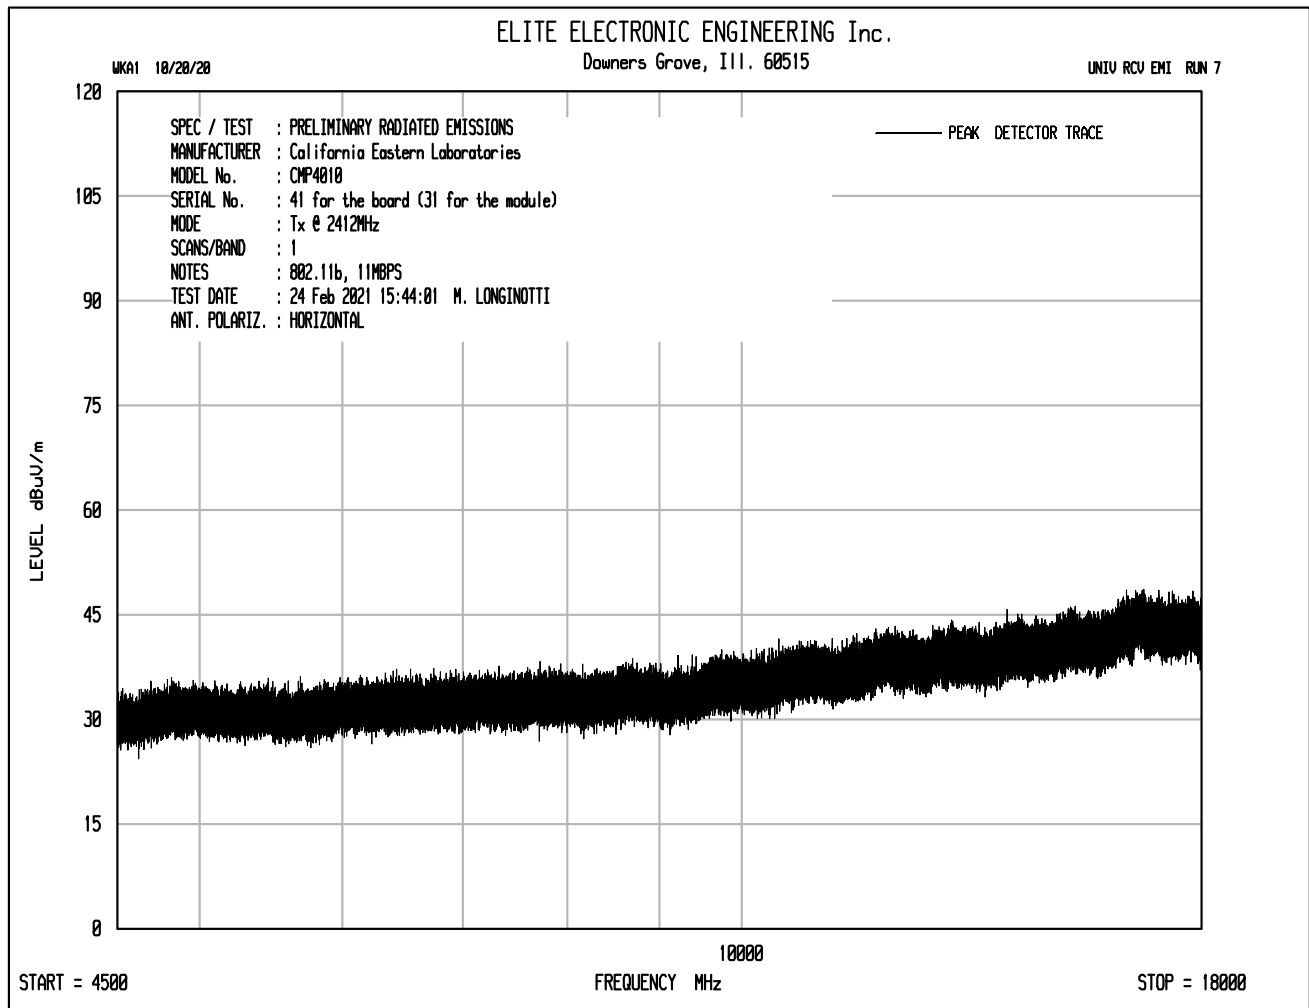

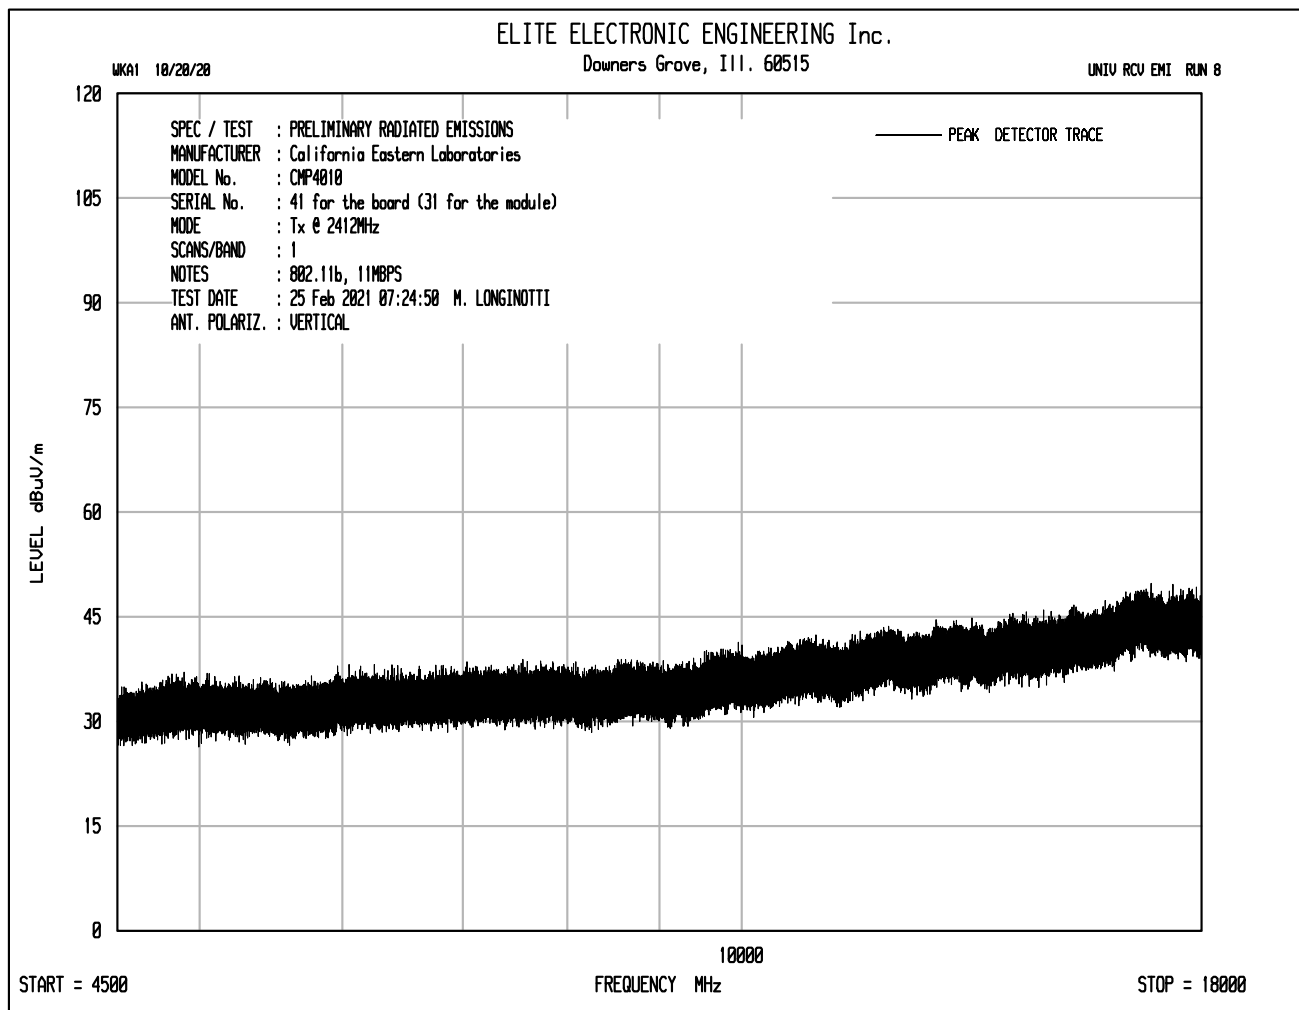

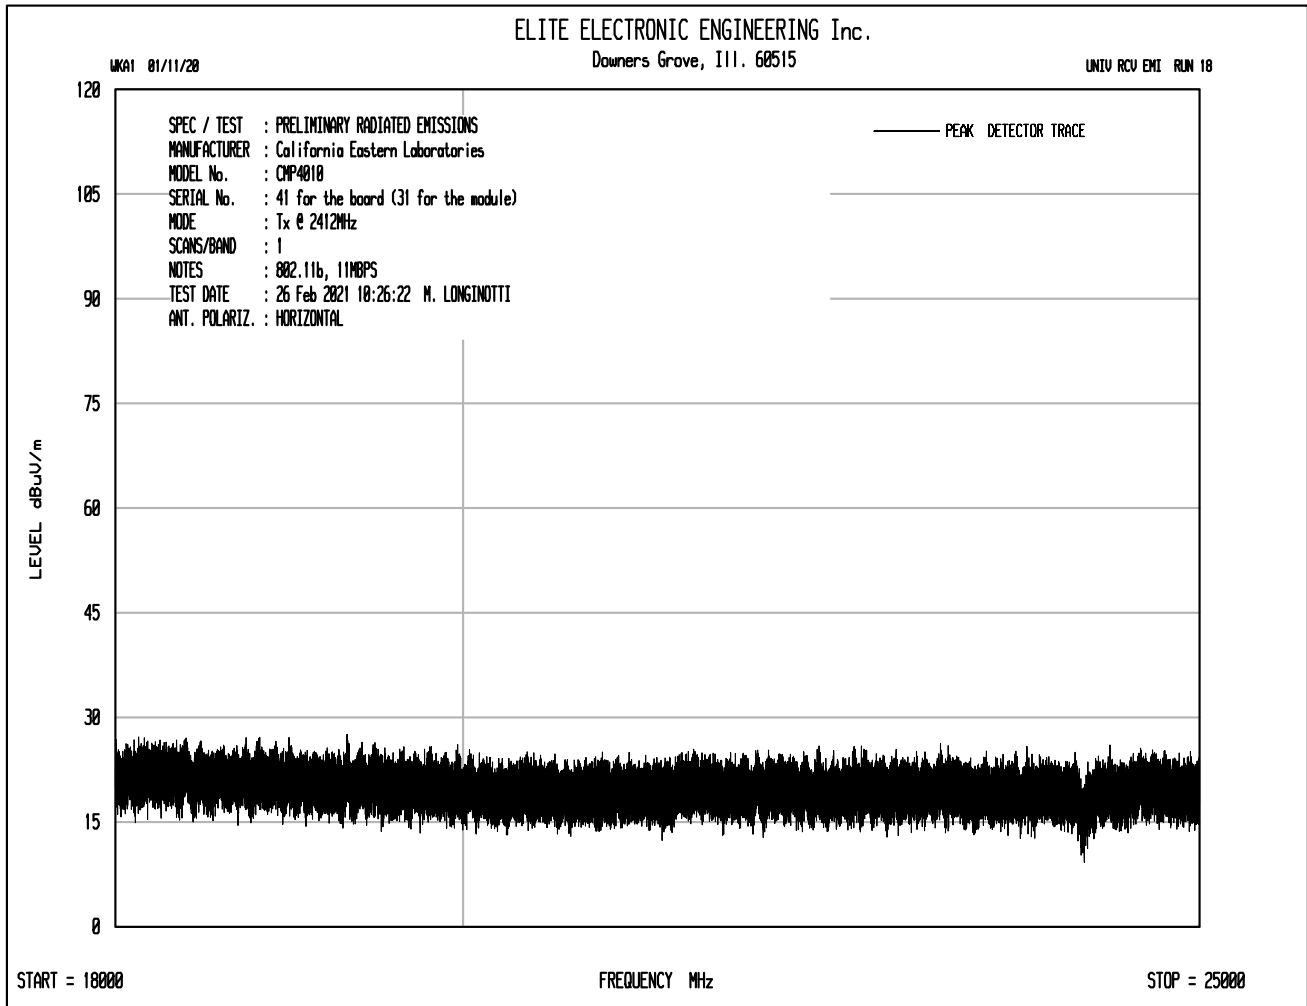

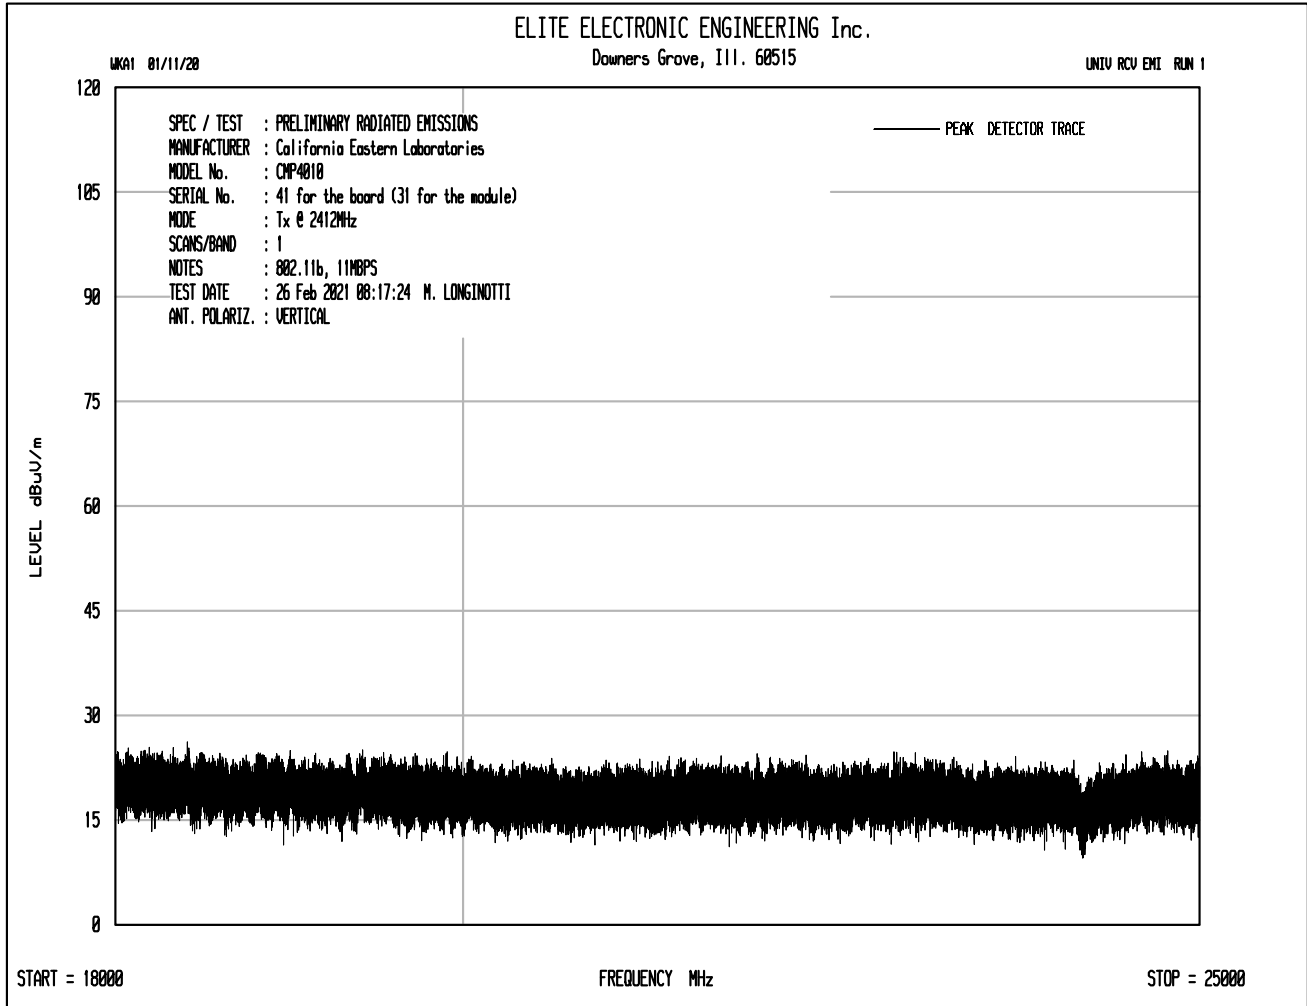

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	41 for the board (31 for the module)
Mode	802.11b, 11MBPS
Transmit Frequency	2412MHz
Parameters	Peak Measurements in the Restricted Bands
Notes	

Frequency (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3 m	Peak Limit μV/m at 3 m	Margin (dB)
4824.00	H	50.6		4.8	34.4	-40.2	49.7	304.7	5000.0	-24.3
4824.00	V	50.3		4.8	34.4	-40.2	49.4	294.4	5000.0	-24.6
12060.00	H	49.6	Ambient	8.0	38.7	-39.9	56.4	660.0	5000.0	-17.6
12060.00	V	49.6	Ambient	8.0	38.7	-39.9	56.4	660.0	5000.0	-17.6
14472.00	H	48.2	Ambient	8.7	39.9	-39.6	57.3	731.2	5000.0	-16.7
14472.00	V	47.9	Ambient	8.7	39.9	-39.6	57.0	706.4	5000.0	-17.0
19296.00	H	24.5	Ambient	2.2	40.4	-27.9	39.2	91.5	5000.0	-34.8
19296.00	V	22.7	Ambient	2.2	40.4	-27.9	37.4	74.4	5000.0	-36.6

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	41 for the board (31 for the module)
Mode	802.11b, 11MBPS
Transmit Frequency	2412MHz
Parameters	Average Measurements in the Restricted Bands
Notes	

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4824.00	H	37.0		4.8	34.4	-40.2	0.0	36.1	63.7	500.0	-17.9
4824.00	V	35.5		4.8	34.4	-40.2	0.0	34.6	53.6	500.0	-19.4
12060.00	H	35.2	Ambient	8.0	38.7	-39.9	0.0	42.0	125.8	500.0	-12.0
12060.00	V	35.2	Ambient	8.0	38.7	-39.9	0.0	42.0	125.8	500.0	-12.0
14472.00	H	33.4	Ambient	8.7	39.9	-39.6	0.0	42.5	133.1	500.0	-11.5
14472.00	V	33.5	Ambient	8.7	39.9	-39.6	0.0	42.6	134.6	500.0	-11.4
19296.00	H	11.4	Ambient	2.2	40.4	-27.9	0.0	26.1	20.2	500.0	-27.9
19296.00	V	9.6	Ambient	2.2	40.4	-27.9	0.0	24.3	16.5	500.0	-29.7

Test Details	
Manufacturer	California Eastern Laboratories
Model	CMP4010
S/N	41 for the board (31 for the module)
Mode	802.11b, 11MBPS
Transmit Frequency	2412MHz
Parameters	Peak Measurements not in the Restricted Bands
Notes	

Freq. MHz	Ant Pol	Meter Reading (dBUV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBUV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2412.00	H	68.2		3.4	32.3	0.0	103.9	157145.7		
2412.00	V	64.0		3.4	32.3	0.0	99.7	96895.2		
7236.00	H	39.4	Ambient	6.1	35.7	-40.3	40.9	110.9	15714.6	-43.0
7236.00	V	38.7	Ambient	6.1	35.7	-40.3	40.2	102.3	15714.6	-43.7
9648.00	H	38.9	Ambient	6.8	36.7	-40.3	42.2	128.4	15714.6	-41.8
9648.00	V	39.5	Ambient	6.8	36.7	-40.3	42.8	137.6	15714.6	-41.2
16884.00	H	38.7	Ambient	9.4	43.4	-39.2	52.4	415.1	15714.6	-31.6
16884.00	V	38.4	Ambient	9.4	43.4	-39.2	52.1	401.0	15714.6	-31.9
21708.00	H	13.2	Ambient	2.2	40.6	-28.7	27.3	23.2	15714.6	-56.6
21708.00	V	11.9	Ambient	2.2	40.6	-28.7	26.0	20.0	15714.6	-57.9
24120.00	H	10.4	Ambient	2.2	40.6	-29.4	23.9	15.7	15714.6	-60.0
24120.00	V	9.9	Ambient	2.2	40.6	-29.4	23.4	14.8	15714.6	-60.5

