




www.testo.com



Probes




0612 1011 penetration temperature probe

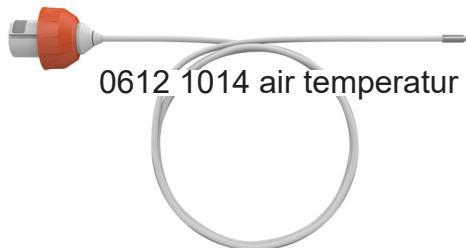


0612 1014 air temperature probe



0612 1012 cooking oil probe




0612 1013 surface temperature probe

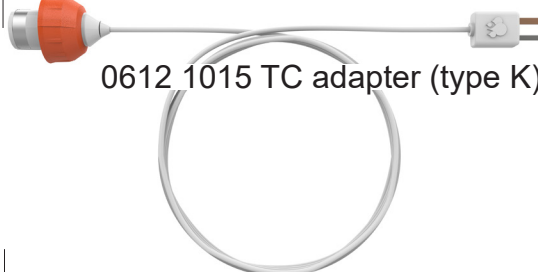

0612 1015 TC adapter (type K)

170x50x37 mm	220	4AA AlMn Mignon 150hours	IP 65 (with probe)	-20°C...+50°C SD -20°C...+50°C	ABS-PC +10%GF TPE ABS

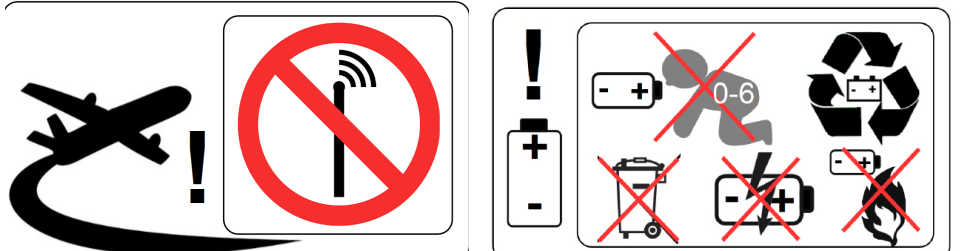

Approval and Certification

Product 产品名称	0560 1020
Mat.-No. 型号	0560 1020
Date 日期	10.08.2020

 The use of the wireless module is subject to the regulations and stipulations of the respective country of use, and the module may only be used in countries for which a country certification has been granted. The user and every owner has the obligation to adhere to these regulations and prerequisites for use, and acknowledges that the resale, export, import etc. in particular in countries without wireless permits, is his responsibility.

Country	Comments
Australia	 E 1561
Canada	IC: 6127B-05601020 see IC Warnings
Europa + EFTA	  The EU Declaration of Conformity can be found on the testo homepage www.testo.com under the product specific downloads. EU countries: Belgium (BE), Bulgaria (BG), Denmark (DK), Germany (DE), Estonia (EE), Finland (FI), France (FR), Greece (GR), Ireland (IE), Italy (IT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Sweden (SE), Slovakia (SK), Slovenia (SI), Spain (ES), Czech Republic (CZ), Hungary (HU), United Kingdom (GB), Republic of Cyprus (CY). EFTA countries: Iceland, Liechtenstein, Norway, Switzerland  WEEE Reg. no.: DE 75334352 
Hongkong	Authorized
Turkey	Authorized
USA	 FCC ID: WAF-05601020 See FCC Warnings

Bluetooth®-Information	Feature 特征与参数	Values 数值
	Bluetooth®-Range 范围	typical 100 m (free field / 无障碍场地)
	Bluetooth® type 型号	Bluetooth® Low Energy (BLE) 5.0
	Bluetooth® company 制造商	Lierda - LSD4BT-E92
	RF Band 射频频段	BT LE: 2402 -2480MHz
	Output power 输出功率	4 dBm
	Antenna gain 天线增益	0 dBi

Bluetooth®-SIG Listing	Feature 特征与参数	Values 数值
	Declaration ID	D043363
	member company	Testo SE & Co. KGaA

NFC	Feature 特征与参数	Values 数值
	MI Carrier	ISO/IEC 14443-A
	RF Band 射频频段	13.56 MHz
EN 13485	Acc. to EN 13485 -E, 0.5, -30...+30°C	
NSF		

IRSS-Gen & RSS-247 statement:
 This device complies with Industry Canada licence-exempt RSS standard(s).
 Operation is subject to the following two conditions:
 (1) this device may not cause interference, and
 (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.
 L'exploitation est autorisée aux deux conditions suivantes :
 (1) l'appareil ne doit pas produire de brouillage, et
 (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution: Radio Frequency Radiation Exposure
 This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment and meets the IC radio frequency (RF) Exposure Guidelines.

Co-Location:
 This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Attention : exposition au rayonnement de radiofréquences
 Cet équipement est conforme aux limites d'exposition aux radiofréquences IC fixées pour un environnement non contrôlé et aux Lignes directrices relatives à l'exposition aux radiofréquences (RF).

Co-location
 Ce transmetteur ne peut pas être installé en colocation ou être utilisé avec une autre antenne ou transmetteur, quel qu'en soit le type.

FCC Warnings
 Information from the FCC (Federal Communications Commission)
 For your own safety
 Shielded cables should be used for a composite interface. This is to ensure continued protection against radio frequency interference.

FCC warning statement
 This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 • Reorient or relocate the receiving antenna.
 • Increase the separation between the equipment and receiver.
 • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 • Consult the dealer or an experienced radio/TV technician for help.

Caution
 Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Shielded interface cable must be used in order to comply with the emission limits.

Warning
 This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) this device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Radio Frequency Radiation Exposure
 This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines.

Co-Location:
 This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.