TEST REPORT

Applicant:	NEW POS Technology Limited
Address:	AB Unit, 14th Floor, Block A, Financial Technology Building, No.11 Keyuan Rd, Nanshan District, Shenzhen
Equipment Type:	Unattended Payment Terminal
Model Name:	NEW5320
Brand Name:	AMP POS
FCC ID:	WAL5320
Test Standard:	47 CFR Part 15 Subpart C (refer to section 3.1)
Sample Arrival Date:	Sep. 03, 2025
Test Date:	Jan. 09, 2026 - Jan. 20, 2026
Date of Issue:	Apr. 30, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Yang Wenxuan **Checked by:** Ye Hongji **Approved by:** Tolan Tu

(Testing Director)

Revision History

Version	Issue Date	Revisions
Rev. 01	Mar. 27, 2026	Initial Issue
Rev. 02	Apr. 30, 2026	Add the FCC ID of the module to the citation description

TABLE OF CONTENTS

1 GENERAL INFORMATION 4
1.1 Test Laboratory 4
1.2 Test Location 4
2 PRODUCT INFORMATION 5
2.1 Applicant Information 5
2.2 Manufacturer Information 5
2.3 General Description for Equipment under Test (EUT) 5
2.4 Technical Information 6
3 SUMMARY OF TEST RESULTS 8
3.1 Test Standards 8
3.2 Test Verdict 9
4 GENERAL TEST CONFIGURATIONS 10
4.1 Test Environments 10
4.2 Test Equipment List 10
4.3 Test Software List 10
4.4 Measurement Uncertainty 11
4.5 Description of Test Setup 11
4.6 Measurement Results Explanation Example 14
5 TEST ITEMS 15
5.1 Antenna Requirements 15
5.2 Frequency Hopping Systems 16
5.3 Number of Hopping Frequencies 17
5.4 Peak Output Power 18

5.5 Occupied Bandwidth 19
5.6 Carrier Frequency Separation 20
5.7 Time of Occupancy (Dwell time) 21
5.8 Conducted Spurious Emission & Authorized-band band-edge 23
5.9 Conducted Emission 24
5.10 Radiated Spurious Emission 25
5.11 Band Edge (Restricted-band band-edge) 27
ANNEX A TEST RESULT 28
A.1 Number of Hopping Frequency 28
A.2 Peak Output Power 28
A.3 20 dB and 99% bandwidth 28
A.4 Hopping Frequency Separation 28
A.5 Average Time of Occupancy 28
A.6 Conducted Spurious Emissions & Authorized-band band-edge 28
A.7 Conducted Emissions 29
A.8 Radiated Spurious Emission 31
A.9 Band Edge (Restricted-band band-edge) 40
ANNEX B TEST SETUP PHOTOS 42
ANNEX C EUT EXTERNAL PHOTOS 42
ANNEX D EUT INTERNAL PHOTOS 42

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☑ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No. 55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong Province, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	NEW POS Technology Limited
Address	AB Unit, 14th Floor, Block A, Financial Technology Building, No.11 Keyuan Rd, Nanshan District, Shenzhen

2.2 Manufacturer Information

Manufacturer	NEW POS Technology Limited
Address	AB Unit, 14th Floor, Block A, Financial Technology Building, No.11 Keyuan Rd, Nanshan District, Shenzhen

2.3 General Description for Equipment under Test (EUT)

EUT Name	Unattended Payment Terminal
Model Name Under Test	NEW5320
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	4G Network LTE FDD Band 2/4/5/7/12/13/14/17/25/26/66/71 LTE TDD Band 41 Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac GPS, GLONASS, NFC

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, π/4-DQPSK, 8-DPSK
Product Type	☐ Mobile ☐ Portable ☒ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	FPC Antenna
Antenna Gain	1.27 dBi
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)
0	**2402**	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	**78**	**2480**
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	**39**	**2441**	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2020	American National Standard for Procedures for Compliance Testing of Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	--	Note [1], Note [3]
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	--	Note [2], Note [3]
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	--	Note [3]
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	--	Note [3]
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	--	Note [2], Note [3]
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	--	Note [2], Note [3]
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Hopping Mode; Low/Middle/High	ANNEX A.6	--	Note [2], Note [3]
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note [2], Note [3]
9	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.8	Pass	Note [2], Note [3]
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/High	ANNEX A.9	Pass	Note [2], Note [3]

Note [1]: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note [2]: π/4-DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in π/4-DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note [3]: The RF module (Model Name: SC200E-NA, SC206E-NA) installed in the EUT is electronically and mechanically identical to the original certified module in the test report No. PD20240152-R3B (FCC ID: XMR2024SC200ENA) which issued by Hefei Panwin Technology Co., Ltd. on Feb. 07, 2025, so just Conducted Emission & Radiated Spurious Emission & Band Edge(Restricted-band band-edge) were retested in this report. Other test items please refer to the No. PD20240152-R3B (FCC ID: XMR2024SC200ENA) which issued by Hefei Panwin Technology Co., Ltd. on Feb. 07, 2025.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 67%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.6℃ to +23.4℃
Working Voltage of the EUT	NV (Normal Voltage)	12 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420186	2025.05.21	2026.05.20
Power meter	R&S	NRP8S	101498	2025.07.07	2026.07.06
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Test Antenna-Bi-Log	Schwarzbeck	VULB 9163	01414	2023.11.03	2026.11.02
Test Antenna-Horn	Schwarzbeck	BBHA 9120D	02459	2023.10.26	2026.10.25
Test Antenna-Loop	Schwarzbeck	FMZB 1513-60	00015	2024.05.07	2026.05.06
Anechoic Chamber	YIHENG	C8-966	N/A	2024.05.15	2027.05.11
EMI Receiver	Keysight	N9038A	MY55330121	2025.04.16	2026.04.15
Filtering unit	balun	SU319F	LW-SZ19D0001F01	N/A	N/A
Switching unit	BALUN	SU319	LW-SZ19D0001S01	N/A	N/A
EMI Receiver	keysight	N9038B	MY61380132	2025.04.01	2026.03.31
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK8127	01009	2025.07.15	2026.07.14
Shielded Enclosure	YiHeng Electronic Co., Ltd	4.3m*2.9m*2.4m	235	2024.11.05	2027.11.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2025.06.16	2026.06.15
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2025.11.26	2026.11.25
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%

4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:
Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

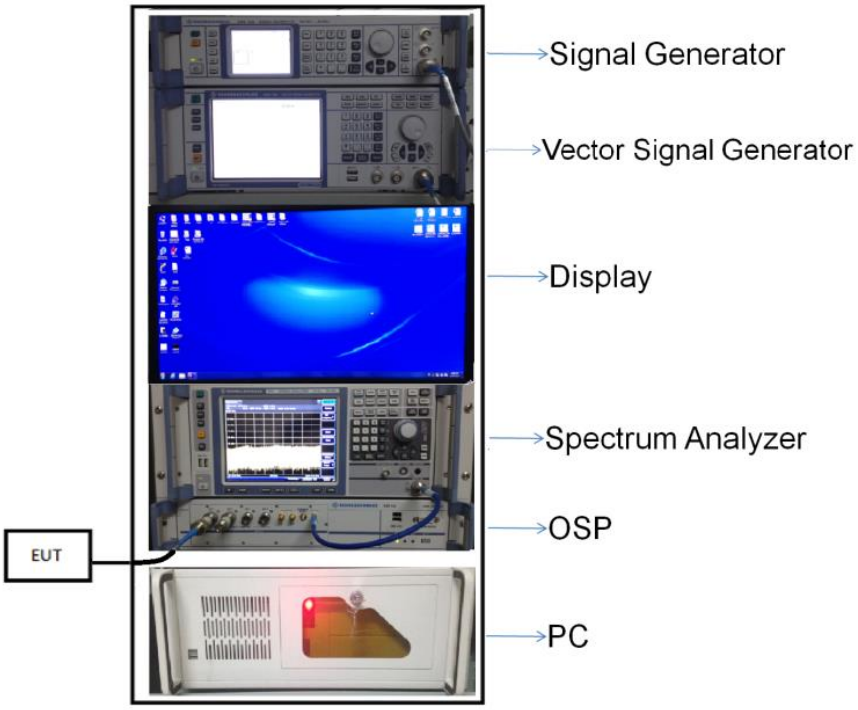

(Diagram 1)

4.5.2 For AC Power Supply Port Test

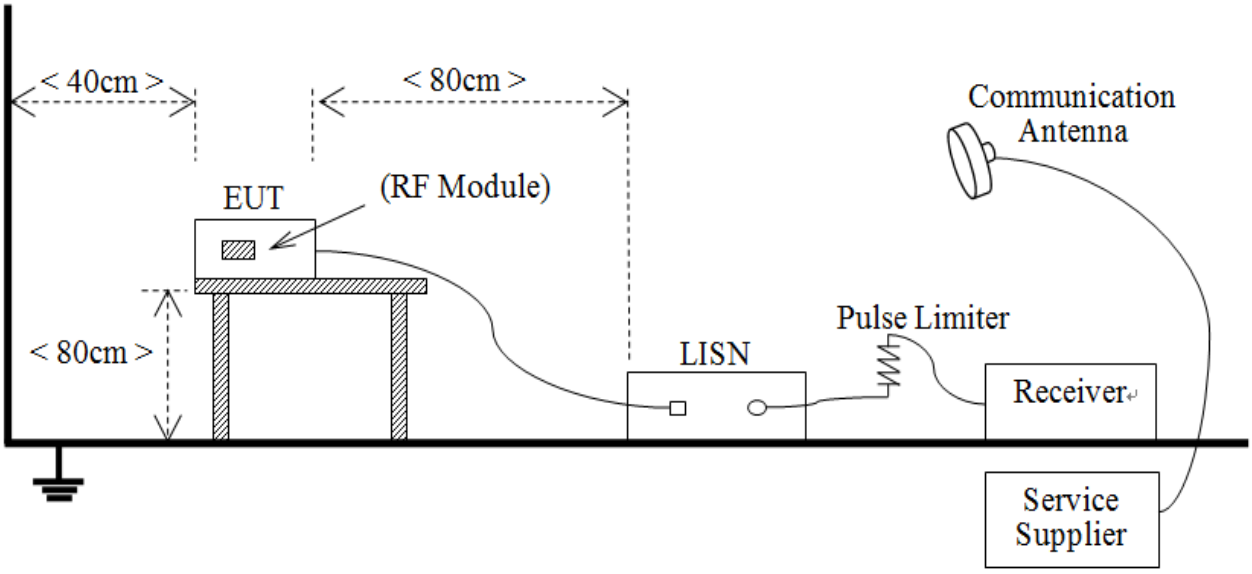

(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

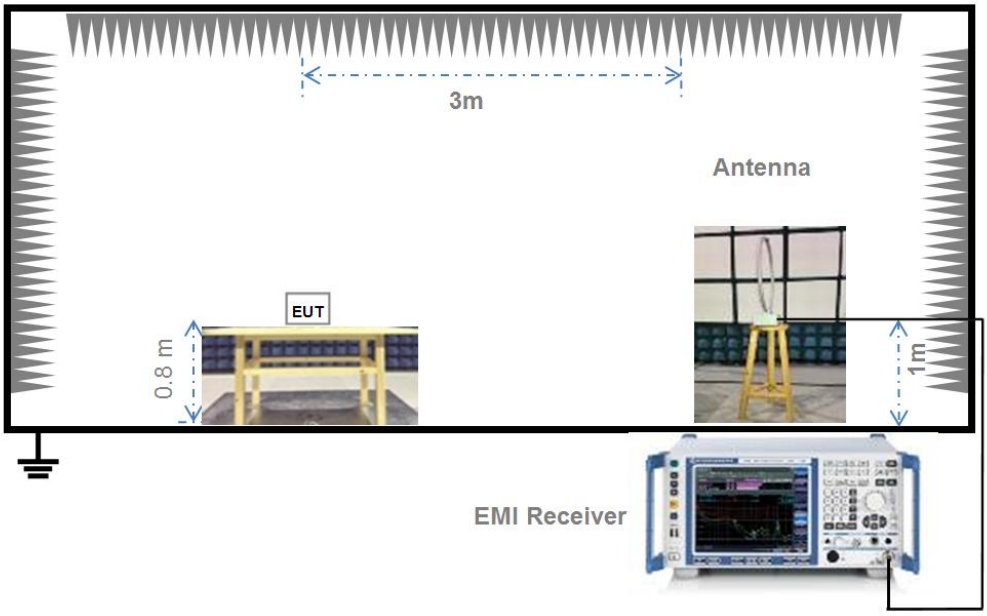

(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

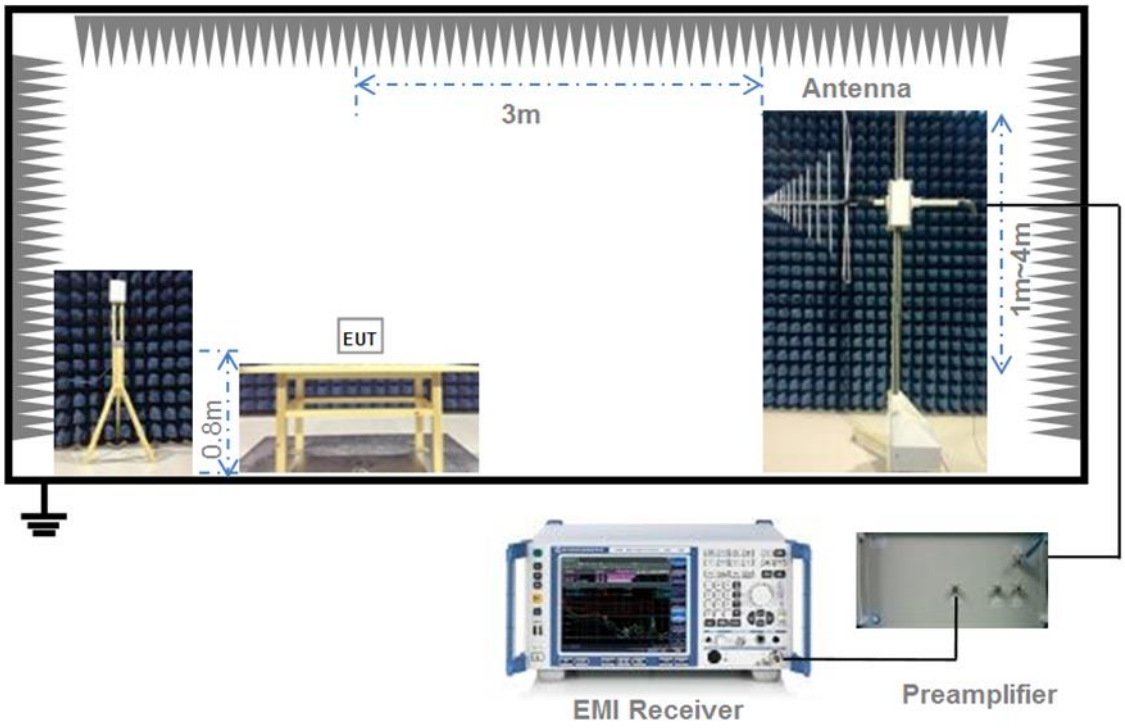

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

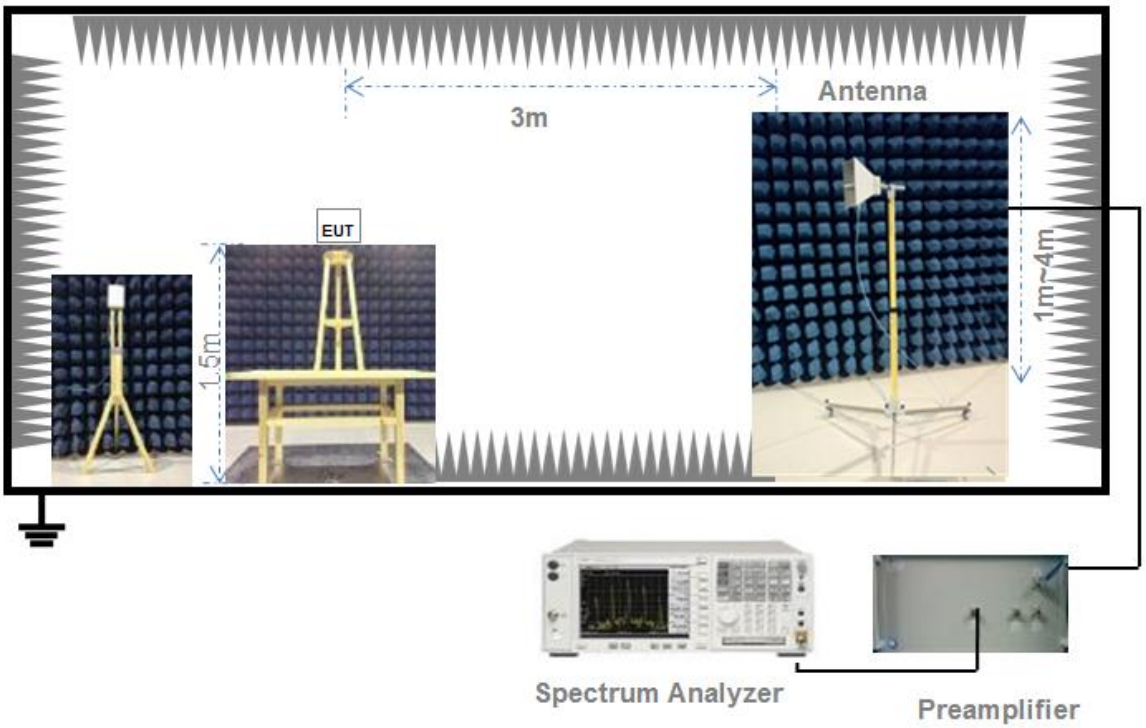

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.
The spectrum analyzer offset is derived from RF cable loss and attenuator factor.
Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h);
Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.
Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).
Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.
Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.
For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.
Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Reference Documents	
N/A	N/A

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwith and transmitted bandwith are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn’t short burst systems.
7. EUT can’t have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span

Video (or Average) Bandwidth (VBW) ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:
Span: Zero span, centered on a hopping channel
RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel
Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel
Detector function: Peak
Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:
For GFSK and 8-DPSK:
For DH1 package type
{Total of Dwell} = {Pulse Time} * (1600 / 2) / {Number of Hopping Frequency} * {Period}
{Period} = 0.4 s * {Number of Hopping Frequency}
For DH3 package type
{Total of Dwell} = {Pulse Time} * (1600 / 4) / {Number of Hopping Frequency} * {Period}
{Period} = 0.4 s * {Number of Hopping Frequency}
For DH5 package type
{Total of Dwell} = {Pulse Time} * (1600 / 6) / {Number of Hopping Frequency} * {Period}
{Period} = 0.4 s * {Number of Hopping Frequency}
For AFH Mode:
For DH1 package type
{Total of Dwell} = {Pulse Time} * (800 / 2) / {Number of Hopping Frequency} * {Period}

{Period} = 0.4 s * {Number of Hopping Frequency}
For DH3 package type
{Total of Dwell} = {Pulse Time} * (800 / 4) / {Number of Hopping Frequency} * {Period}
{Period} = 0.4 s * {Number of Hopping Frequency}
For DH5 package type
{Total of Dwell} = {Pulse Time} * (800 / 6) / {Number of Hopping Frequency} * {Period}
{Period} = 0.4 s * {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz
VBW = 300 kHz
Sweep = auto
Detector function = peak
Trace = max hold
Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.
Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for f ≥ 1 GHz, 100 kHz for f < 1 GHz
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold
For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for f ≥ 1 GHz, 100 kHz for f < 1 GHz
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT

A.1 Number of Hopping Frequency

Note: The Number of Hopping Frequency please refer to the Report No. PD20240152-R3B (FCC ID: XMR2024SC200ENA) which issued by Hefei Panwin Technology Co., Ltd. on Feb. 07, 2025, **Section 4.6 Number of Channel Measurement.**

A.2 Peak Output Power

Note: The Peak Output Power please refer to the Report No. PD20240152-R3B (FCC ID: XMR2024SC200ENA) which issued by Hefei Panwin Technology Co., Ltd. on Feb. 07, 2025, **Section 4.1 Output Power Measurement.**

A.3 20 dB and 99% bandwidth

Note: The 20 dB and 99% bandwidth please refer to the Report No. PD20240152-R3B (FCC ID: XMR2024SC200ENA) which issued by Hefei Panwin Technology Co., Ltd. on Feb. 07, 2025, **Section 4.2 20dB and 99% Bandwidth Measurement.**

A.4 Hopping Frequency Separation

Note: The Hopping Frequency Separation please refer to the Report No. PD20240152-R3B (FCC ID: XMR2024SC200ENA) which issued by Hefei Panwin Technology Co., Ltd. on Feb. 07, 2025, **Section 4.5 Hopping Channel Separation Measurement.**

A.5 Average Time of Occupancy

Note: The Average Time of Occupancy please refer to the Report No. PD20240152-R3B (FCC ID: XMR2024SC200ENA) which issued by Hefei Panwin Technology Co., Ltd. on Feb. 07, 2025, **Section 4.4 Dwell Time Measurement.**

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Note: The Conducted Spurious Emissions & Authorized-band band-edge please refer to the Report No. PD20240152-R3B (FCC ID: XMR2024SC200ENA) which issued by Hefei Panwin Technology Co., Ltd. on Feb. 07, 2025, **Section 4.3 Conducted Band Edges Measurement.**

A.7 Conducted Emissions

Note [1]: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note [2]: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note [3]: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L

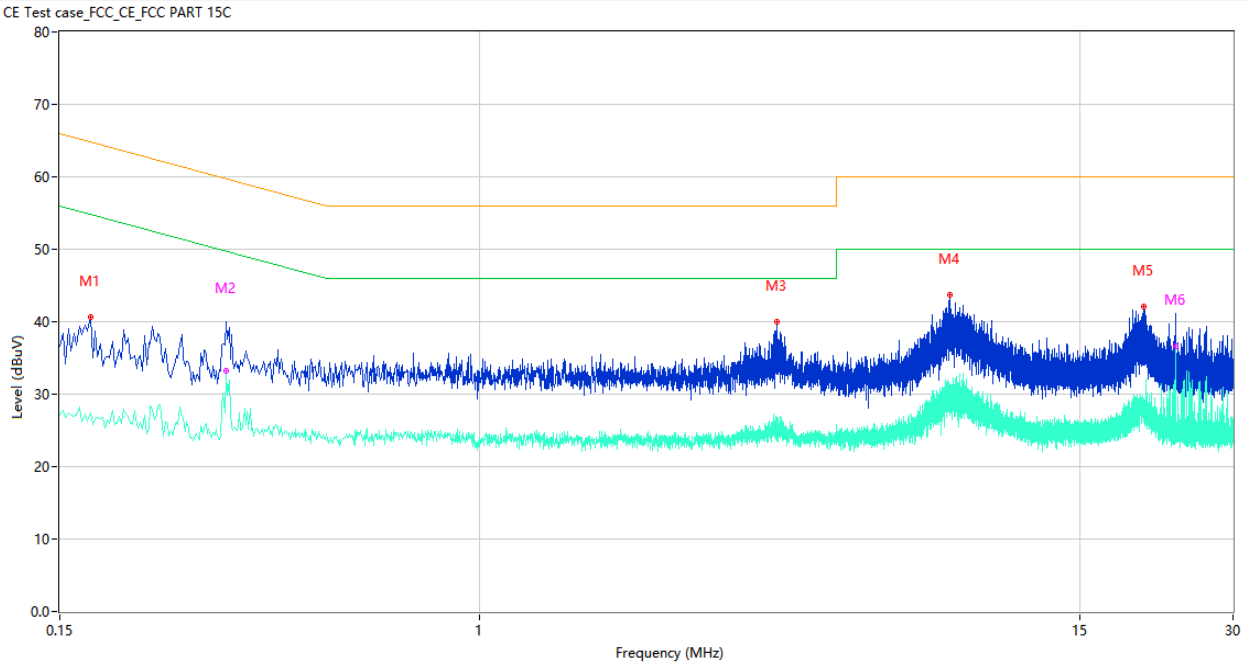

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.172	40.60	9.85	64.86	24.26	Peak	L	Pass
1**	0.172	27.41	9.85	54.86	27.45	AV	L	Pass
2	0.318	39.93	10.18	59.76	19.83	Peak	L	Pass
2**	0.318	33.21	10.18	49.76	16.55	AV	L	Pass
3	3.834	40.02	10.35	56.00	15.98	Peak	L	Pass
3**	3.834	26.74	10.35	46.00	19.26	AV	L	Pass
4	8.336	43.74	10.23	60.00	16.26	Peak	L	Pass
4**	8.336	31.19	10.23	50.00	18.81	AV	L	Pass
5	20.080	42.14	11.09	60.00	17.86	Peak	L	Pass
5**	20.080	28.37	11.09	50.00	21.63	AV	L	Pass
6	23.126	41.06	10.81	60.00	18.94	Peak	L	Pass
6**	23.126	36.69	10.81	50.00	13.31	AV	L	Pass

PHASE N

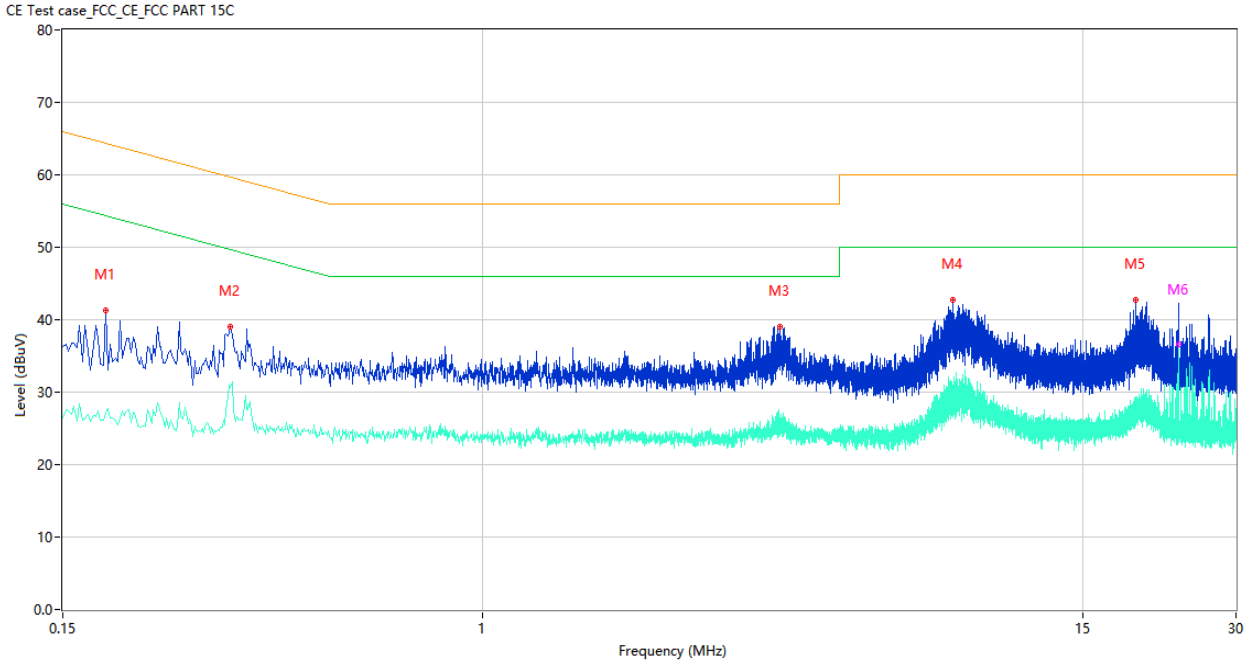

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.182	41.23	9.84	64.39	23.16	Peak	N	Pass
1**	0.182	27.07	9.84	54.39	27.32	AV	N	Pass
2	0.320	39.02	10.22	59.71	20.69	Peak	N	Pass
2**	0.320	30.71	10.22	49.71	19.00	AV	N	Pass
3	3.834	39.10	10.35	56.00	16.90	Peak	N	Pass
3**	3.834	26.39	10.35	46.00	19.61	AV	N	Pass
4	8.336	42.75	10.23	60.00	17.25	Peak	N	Pass
4**	8.336	29.41	10.23	50.00	20.59	AV	N	Pass
5	19.096	42.79	11.14	60.00	17.21	Peak	N	Pass
5**	19.096	26.79	11.14	50.00	23.21	AV	N	Pass
6	23.128	42.33	10.82	60.00	17.67	Peak	N	Pass
6**	23.128	36.69	10.82	50.00	13.31	AV	N	Pass

A.8 Radiated Spurious Emission

Note [1]: The symbol of "--" in the table which means not application.

Note [2]: For the test data above 1 GHz, according the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note [3]: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note [4]: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots

30 MHz to 1 GHz, ANT H

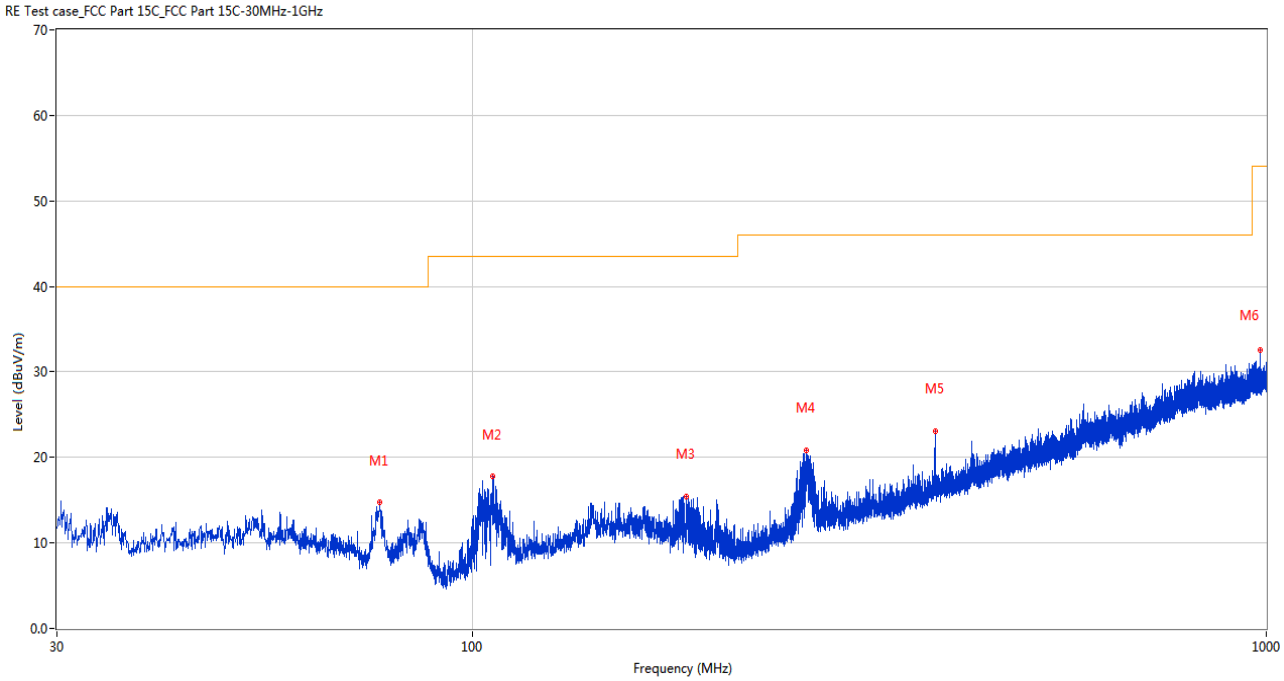

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	76.511	14.71	-28.30	40.0	25.29	Peak	0.00	100	Horizontal	Pass
2	106.242	17.73	-28.27	43.5	25.77	Peak	317.00	100	Horizontal	Pass
3	186.073	15.47	-26.44	43.5	28.03	Peak	284.00	100	Horizontal	Pass
4	263.722	20.83	-24.33	46.0	25.17	Peak	155.00	100	Horizontal	Pass
5	382.789	23.11	-20.24	46.0	22.89	Peak	88.00	100	Horizontal	Pass
6	983.510	32.51	-7.78	54.0	21.49	Peak	44.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

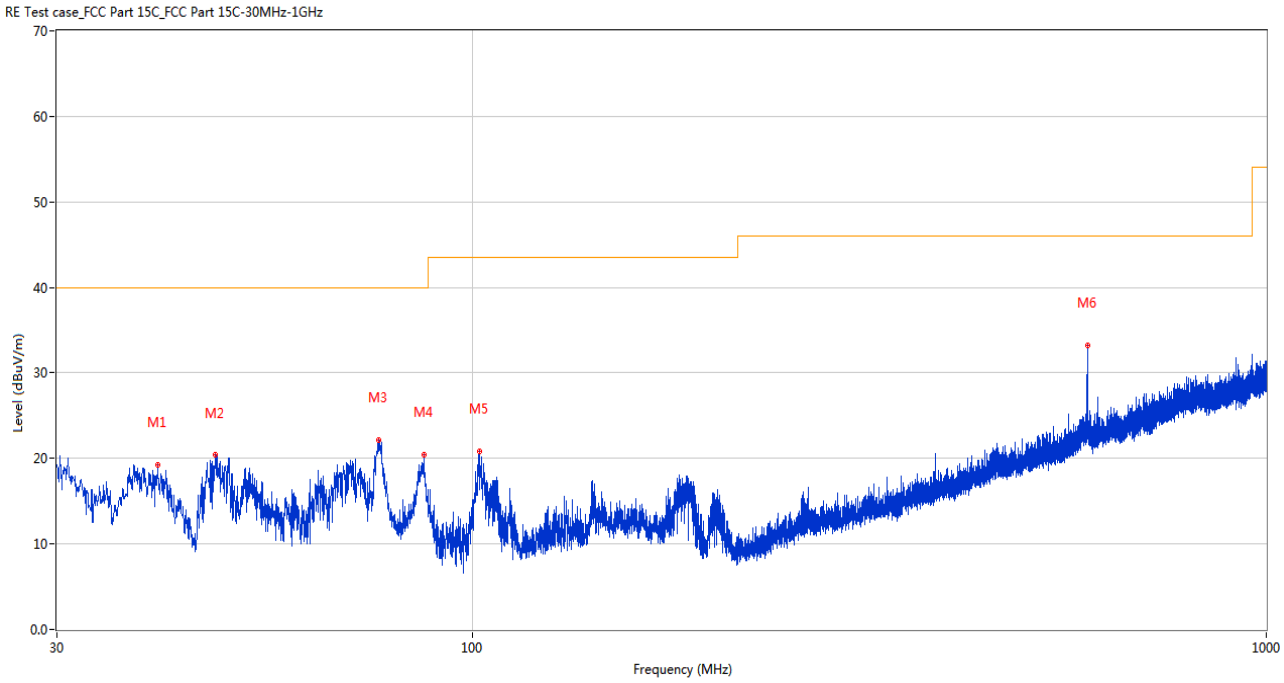

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.185	19.27	-25.65	40.0	20.73	Peak	100.00	100	Vertical	Pass
2	47.460	20.38	-25.02	40.0	19.62	Peak	64.00	100	Vertical	Pass
3	76.366	22.19	-28.27	40.0	17.81	Peak	147.00	100	Vertical	Pass
4	86.891	20.40	-30.34	40.0	19.60	Peak	81.00	100	Vertical	Pass
5	102.168	20.81	-29.14	43.5	22.69	Peak	348.00	100	Vertical	Pass
6	595.219	33.21	-13.97	46.0	12.79	Peak	337.00	100	Vertical	Pass

Note [1]: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note [2]: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

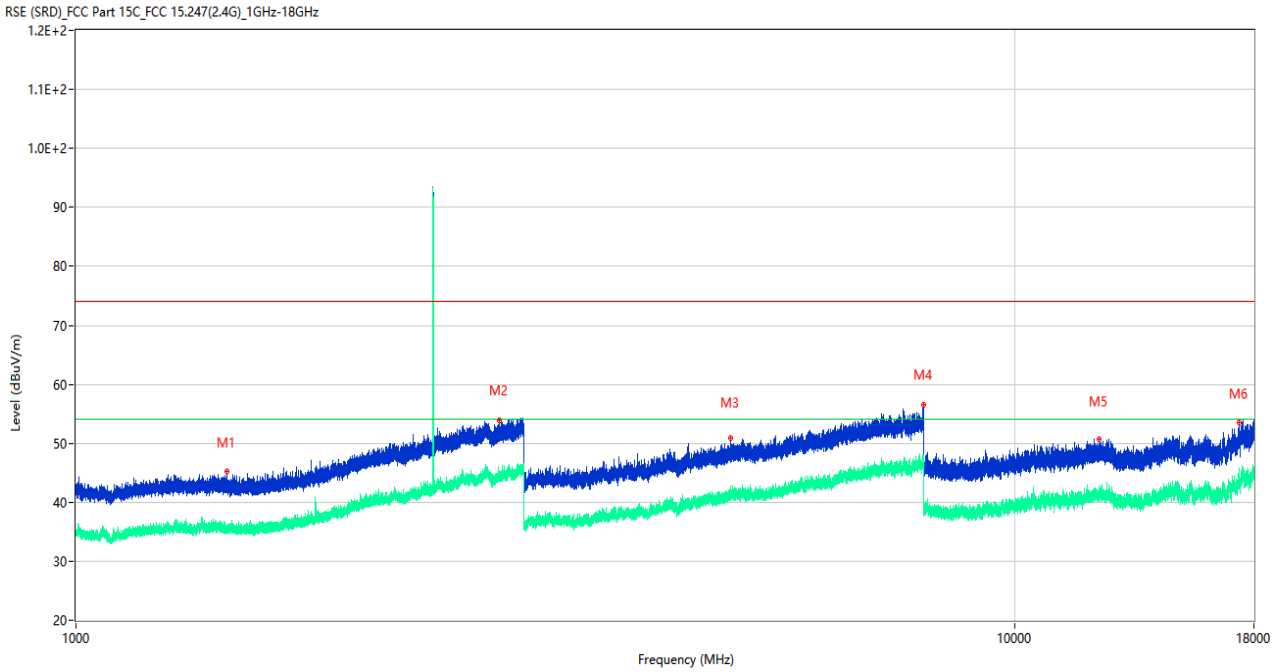

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1451.323	45.41	74.0	28.59	Peak	324.00	300	Horizontal	Pass
1**	1451.323	35.44	54.0	18.56	AV	324.00	300	Horizontal	Pass
2	2829.467	53.92	74.0	20.08	Peak	251.00	200	Horizontal	Pass
2**	2829.467	44.10	54.0	9.90	AV	251.00	200	Horizontal	Pass
3	4986.694	50.89	74.0	23.11	Peak	212.00	200	Horizontal	Pass
3**	4986.694	40.73	54.0	13.27	AV	212.00	200	Horizontal	Pass
4	7995.603	56.87	74.0	17.13	Peak	252.00	100	Horizontal	Pass
4**	7995.603	47.08	54.0	6.92	AV	252.00	100	Horizontal	Pass
5	12315.583	50.95	74.0	23.05	Peak	146.00	100	Horizontal	Pass
5**	12315.583	41.48	54.0	12.52	AV	146.00	100	Horizontal	Pass
6	17363.066	53.65	74.0	20.35	Peak	140.00	400	Horizontal	Pass
6**	17363.066	44.01	54.0	9.99	AV	140.00	400	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1465.187	42.49	74.0	31.51	Peak	314.00	400	Vertical	Pass
1**	1465.187	32.58	54.0	21.42	AV	314.00	400	Vertical	Pass
2	2993.192	52.88	74.0	21.12	Peak	328.00	300	Vertical	Pass
2**	2993.192	40.75	54.0	13.25	AV	328.00	300	Vertical	Pass
3	6801.870	54.41	74.0	19.59	Peak	101.00	200	Vertical	Pass
3**	6801.870	43.36	54.0	10.64	AV	101.00	200	Vertical	Pass
4	7963.294	57.68	74.0	16.32	Peak	125.00	300	Vertical	Pass
4**	7963.294	41.07	54.0	12.93	AV	125.00	300	Vertical	Pass
5	12494.606	51.08	74.0	22.92	Peak	8.00	100	Vertical	Pass
5**	12494.606	39.69	54.0	14.31	AV	8.00	100	Vertical	Pass
6	17096.232	55.28	74.0	18.72	Peak	267.00	200	Vertical	Pass
6**	17096.232	40.78	54.0	13.22	AV	267.00	200	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1448.925	45.29	74.0	28.71	Peak	286.00	300	Horizontal	Pass
1**	1448.925	35.04	54.0	18.96	AV	286.00	300	Horizontal	Pass
2	2826.239	53.52	74.0	20.48	Peak	61.00	100	Horizontal	Pass
2**	2826.239	43.81	54.0	10.19	AV	61.00	100	Horizontal	Pass
3	4986.857	49.96	74.0	24.04	Peak	161.00	200	Horizontal	Pass
3**	4986.857	40.37	54.0	13.63	AV	161.00	200	Horizontal	Pass
4	7996.417	55.87	74.0	18.13	Peak	220.00	300	Horizontal	Pass
4**	7996.417	46.17	54.0	7.83	AV	220.00	300	Horizontal	Pass
5	12313.757	50.92	74.0	23.08	Peak	217.00	300	Horizontal	Pass
5**	12313.757	41.38	54.0	12.62	AV	217.00	300	Horizontal	Pass
6	17355.999	52.74	74.0	21.26	Peak	23.00	300	Horizontal	Pass
6**	17355.999	43.46	54.0	10.54	AV	23.00	300	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1460.011	42.03	74.0	31.97	Peak	314.00	200	Vertical	Pass
1**	1460.011	31.91	54.0	22.09	AV	314.00	200	Vertical	Pass
2	2993.151	52.79	74.0	21.21	Peak	300.00	300	Vertical	Pass
2**	2993.151	39.75	54.0	14.25	AV	300.00	300	Vertical	Pass
3	6801.257	53.99	74.0	20.01	Peak	302.00	200	Vertical	Pass
3**	6801.257	42.71	54.0	11.29	AV	302.00	200	Vertical	Pass
4	7965.154	57.45	74.0	16.55	Peak	196.00	400	Vertical	Pass
4**	7965.154	40.09	54.0	13.91	AV	196.00	400	Vertical	Pass
5	12490.673	50.94	74.0	23.06	Peak	301.00	200	Vertical	Pass
5**	12490.673	39.54	54.0	14.46	AV	301.00	200	Vertical	Pass
6	17096.795	55.12	74.0	18.88	Peak	335.00	300	Vertical	Pass
6**	17096.795	40.68	54.0	13.32	AV	335.00	300	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1452.105	44.89	74.0	29.11	Peak	352.00	300	Horizontal	Pass
1**	1452.105	34.82	54.0	19.18	AV	352.00	300	Horizontal	Pass
2	2824.375	53.12	74.0	20.88	Peak	60.00	100	Horizontal	Pass
2**	2824.375	43.35	54.0	10.65	AV	60.00	100	Horizontal	Pass
3	4984.935	50.70	74.0	23.30	Peak	313.00	200	Horizontal	Pass
3**	4984.935	39.99	54.0	14.01	AV	313.00	200	Horizontal	Pass
4	7993.130	56.43	74.0	17.57	Peak	253.00	300	Horizontal	Pass
4**	7993.130	46.59	54.0	7.41	AV	253.00	300	Horizontal	Pass
5	12315.496	50.03	74.0	23.97	Peak	93.00	100	Horizontal	Pass
5**	12315.496	40.72	54.0	13.28	AV	93.00	100	Horizontal	Pass
6	17362.983	53.31	74.0	20.69	Peak	151.00	200	Horizontal	Pass
6**	17362.983	43.26	54.0	10.74	AV	151.00	200	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1466.893	41.95	74.0	32.05	Peak	271.00	400	Vertical	Pass
1**	1466.893	32.29	54.0	21.71	AV	271.00	400	Vertical	Pass
2	2991.830	52.50	74.0	21.50	Peak	353.00	100	Vertical	Pass
2**	2991.830	40.64	54.0	13.36	AV	353.00	100	Vertical	Pass
3	6802.739	53.64	74.0	20.36	Peak	82.00	200	Vertical	Pass
3**	6802.739	43.11	54.0	10.89	AV	82.00	200	Vertical	Pass
4	7970.298	56.80	74.0	17.20	Peak	273.00	100	Vertical	Pass
4**	7970.298	41.03	54.0	12.97	AV	273.00	100	Vertical	Pass
5	12491.786	50.96	74.0	23.04	Peak	213.00	100	Vertical	Pass
5**	12491.786	38.72	54.0	15.28	AV	213.00	100	Vertical	Pass
6	17100.014	55.12	74.0	18.88	Peak	247.00	300	Vertical	Pass
6**	17100.014	40.28	54.0	13.72	AV	247.00	300	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.087	44.96	74.0	29.04	Peak	288.00	400	Horizontal	Pass
1**	1288.087	34.51	54.0	19.49	AV	288.00	400	Horizontal	Pass
2	2771.192	53.22	74.0	20.78	Peak	174.00	300	Horizontal	Pass
2**	2771.192	43.32	54.0	10.68	AV	174.00	300	Horizontal	Pass
3	5167.260	50.47	74.0	23.53	Peak	85.00	200	Horizontal	Pass
3**	5167.260	40.65	54.0	13.35	AV	85.00	200	Horizontal	Pass
4	6804.029	56.53	74.0	17.47	Peak	235.00	400	Horizontal	Pass
4**	6804.029	46.89	54.0	7.11	AV	235.00	400	Horizontal	Pass
5	13469.581	49.97	74.0	24.03	Peak	62.00	300	Horizontal	Pass
5**	13469.581	40.73	54.0	13.27	AV	62.00	300	Horizontal	Pass
6	17469.868	52.76	74.0	21.24	Peak	119.00	200	Horizontal	Pass
6**	17469.868	43.53	54.0	10.47	AV	119.00	200	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.788	42.39	74.0	31.61	Peak	338.00	400	Vertical	Pass
1**	1279.788	31.79	54.0	22.21	AV	338.00	400	Vertical	Pass
2	2771.439	52.80	74.0	21.20	Peak	71.00	300	Vertical	Pass
2**	2771.439	39.98	54.0	14.02	AV	71.00	300	Vertical	Pass
3	5161.670	54.07	74.0	19.93	Peak	291.00	200	Vertical	Pass
3**	5161.670	43.19	54.0	10.81	AV	291.00	200	Vertical	Pass
4	6809.040	56.93	74.0	17.07	Peak	210.00	300	Vertical	Pass
4**	6809.040	40.53	54.0	13.47	AV	210.00	300	Vertical	Pass
5	13464.157	50.80	74.0	23.20	Peak	48.00	400	Vertical	Pass
5**	13464.157	39.33	54.0	14.67	AV	48.00	400	Vertical	Pass
6	17466.307	54.59	74.0	19.41	Peak	268.00	300	Vertical	Pass
6**	17466.307	40.66	54.0	13.34	AV	268.00	300	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.626	44.50	74.0	29.50	Peak	297.00	100	Horizontal	Pass
1**	1284.626	34.05	54.0	19.95	AV	297.00	100	Horizontal	Pass
2	2774.083	53.36	74.0	20.64	Peak	182.00	200	Horizontal	Pass
2**	2774.083	43.67	54.0	10.33	AV	182.00	200	Horizontal	Pass
3	5168.737	49.05	74.0	24.95	Peak	236.00	200	Horizontal	Pass
3**	5168.737	39.98	54.0	14.02	AV	236.00	200	Horizontal	Pass
4	6802.576	54.92	74.0	19.08	Peak	263.00	400	Horizontal	Pass
4**	6802.576	45.90	54.0	8.10	AV	263.00	400	Horizontal	Pass
5	13470.381	50.54	74.0	23.46	Peak	73.00	300	Horizontal	Pass
5**	13470.381	41.15	54.0	12.85	AV	73.00	300	Horizontal	Pass
6	17470.335	51.79	74.0	22.21	Peak	72.00	300	Horizontal	Pass
6**	17470.335	43.34	54.0	10.66	AV	72.00	300	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1280.857	41.82	74.0	32.18	Peak	92.00	100	Vertical	Pass
1**	1280.857	31.61	54.0	22.39	AV	92.00	100	Vertical	Pass
2	2774.795	52.75	74.0	21.25	Peak	235.00	200	Vertical	Pass
2**	2774.795	38.99	54.0	15.01	AV	235.00	200	Vertical	Pass
3	5167.096	53.70	74.0	20.30	Peak	260.00	200	Vertical	Pass
3**	5167.096	42.50	54.0	11.50	AV	260.00	200	Vertical	Pass
4	6808.954	56.85	74.0	17.15	Peak	12.00	300	Vertical	Pass
4**	6808.954	39.82	54.0	14.18	AV	12.00	300	Vertical	Pass
5	13465.303	50.72	74.0	23.28	Peak	61.00	300	Vertical	Pass
5**	13465.303	38.75	54.0	15.25	AV	61.00	300	Vertical	Pass
6	17464.346	54.60	74.0	19.40	Peak	7.00	100	Vertical	Pass
6**	17464.346	40.13	54.0	13.87	AV	7.00	100	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1281.838	44.09	74.0	29.91	Peak	280.00	100	Horizontal	Pass
1**	1281.838	34.28	54.0	19.72	AV	280.00	100	Horizontal	Pass
2	2767.869	52.14	74.0	21.86	Peak	101.00	100	Horizontal	Pass
2**	2767.869	42.89	54.0	11.11	AV	101.00	100	Horizontal	Pass
3	5168.621	49.80	74.0	24.20	Peak	74.00	200	Horizontal	Pass
3**	5168.621	39.47	54.0	14.53	AV	74.00	200	Horizontal	Pass
4	6803.144	55.80	74.0	18.20	Peak	58.00	200	Horizontal	Pass
4**	6803.144	46.28	54.0	7.72	AV	58.00	200	Horizontal	Pass
5	13463.550	49.09	74.0	24.91	Peak	313.00	100	Horizontal	Pass
5**	13463.550	40.39	54.0	13.61	AV	313.00	100	Horizontal	Pass
6	17468.894	52.68	74.0	21.32	Peak	359.00	400	Horizontal	Pass
6**	17468.894	42.95	54.0	11.05	AV	359.00	400	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1282.655	41.56	74.0	32.44	Peak	43.00	100	Vertical	Pass
1**	1282.655	32.13	54.0	21.87	AV	43.00	100	Vertical	Pass
2	2771.769	51.54	74.0	22.46	Peak	2.00	300	Vertical	Pass
2**	2771.769	39.80	54.0	14.20	AV	2.00	300	Vertical	Pass
3	5164.075	53.55	74.0	20.45	Peak	189.00	200	Vertical	Pass
3**	5164.075	42.32	54.0	11.68	AV	189.00	200	Vertical	Pass
4	6801.906	56.24	74.0	17.76	Peak	233.00	200	Vertical	Pass
4**	6801.906	40.88	54.0	13.12	AV	233.00	200	Vertical	Pass
5	13468.151	50.15	74.0	23.85	Peak	345.00	300	Vertical	Pass
5**	13468.151	38.51	54.0	15.49	AV	345.00	300	Vertical	Pass
6	17465.997	54.83	74.0	19.17	Peak	235.00	400	Vertical	Pass
6**	17465.997	40.16	54.0	13.84	AV	235.00	400	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note [1]: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note [2]: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note [3]: According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note [4]: The Level (dBuV/m) has been corrected by factor.

Note [5]: Both horizontal and vertical directions were pre tested, only the worst configuration has been reported in this report.

Test Data and Plots

GFSK LOW CHANNEL

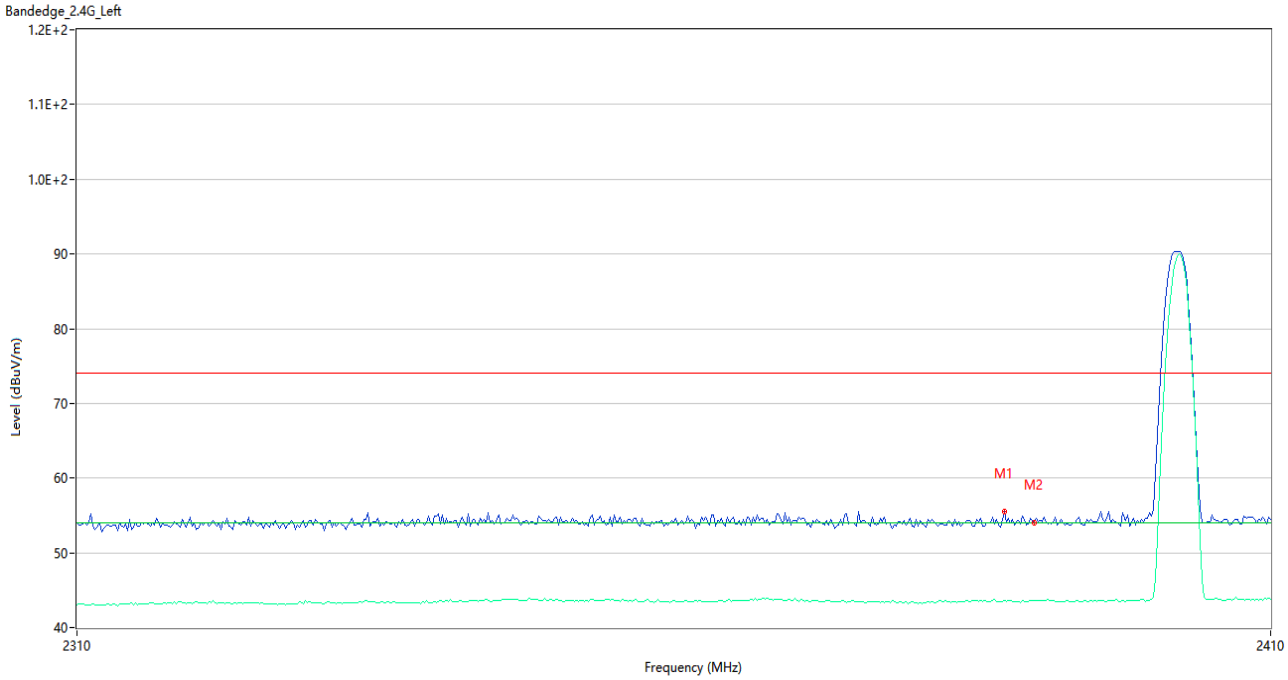

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2386.282	55.71	74.0	18.29	Peak	244.00	200	Horizontal	Pass
1**	2386.282	43.80	54.0	10.20	AV	244.00	200	Horizontal	Pass
2	2390.000	54.31	74.0	19.69	Peak	172.00	300	Horizontal	Pass
2**	2390.000	43.85	54.0	10.15	AV	172.00	300	Horizontal	Pass

GFSK HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.07	74.0	19.93	Peak	321.00	200	Horizontal	Pass
1**	2483.500	43.51	54.0	10.49	AV	321.00	200	Horizontal	Pass
2	2500.613	55.72	74.0	18.28	Peak	280.00	200	Horizontal	Pass
2**	2500.613	43.53	54.0	10.47	AV	280.00	200	Horizontal	Pass

8-DPSK LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2325.823	55.56	74.0	18.44	Peak	248.00	300	Horizontal	Pass
1**	2325.823	43.75	54.0	10.25	AV	248.00	300	Horizontal	Pass
2	2390.000	53.99	74.0	20.02	Peak	340.00	300	Horizontal	Pass
2**	2390.000	43.07	54.0	10.93	AV	340.00	300	Horizontal	Pass

8-DPSK HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.53	74.0	19.48	Peak	345.00	300	Horizontal	Pass
1**	2483.500	43.38	54.0	10.62	AV	345.00	300	Horizontal	Pass
2	2489.954	55.61	74.0	18.39	Peak	274.00	300	Horizontal	Pass
2**	2489.954	43.68	54.0	10.32	AV	274.00	300	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2590416-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2590416-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2590416-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the “inspection and testing dedicated stamp” or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--