

Meas.1 Body Plane with Back Side 10mm on 78 Channel in Bluetooth mode with ANT1

Date: 2026.03.25

Communication System Band: 1; Frequency: 2480 MHz; Duty Cycle: 1:1.301

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 38.037$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch78/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0261 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.9210 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.0271 W/kg

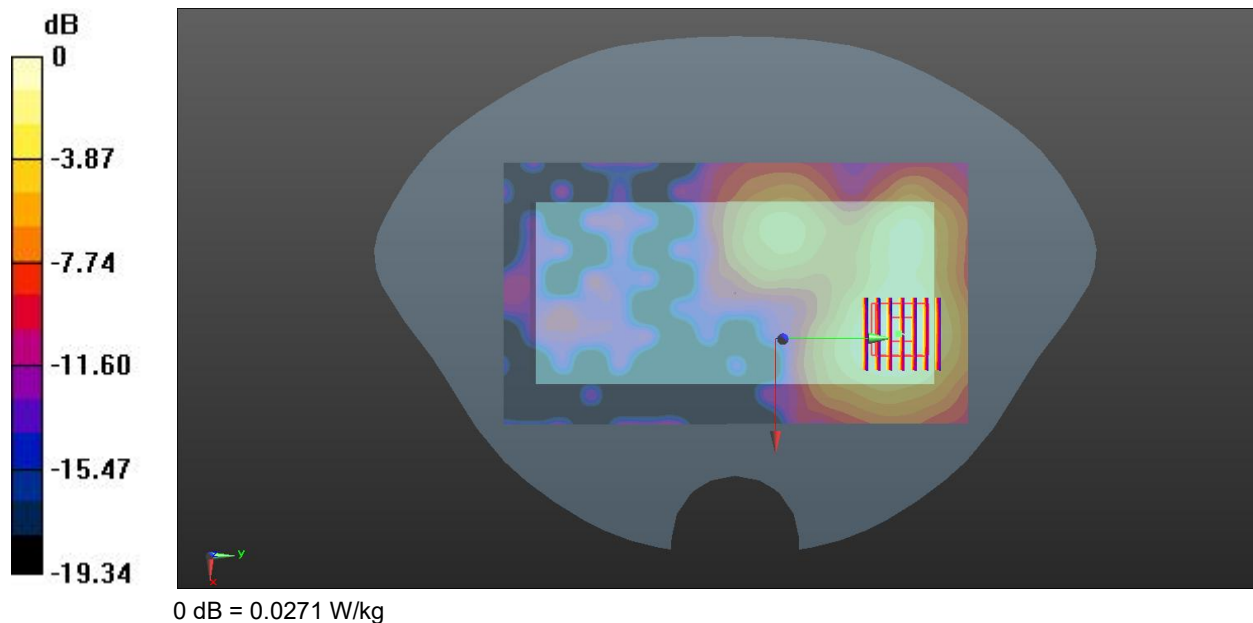

Meas.2 Body Plane with Back Side 10mm on 6 Channel in IEEE802.11b mode with ANT1

Date: 2026.03.25

Communication System Band: 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1.005

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.799$ S/m; $\epsilon_r = 40.155$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.254 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.637 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 20.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.245 W/kg

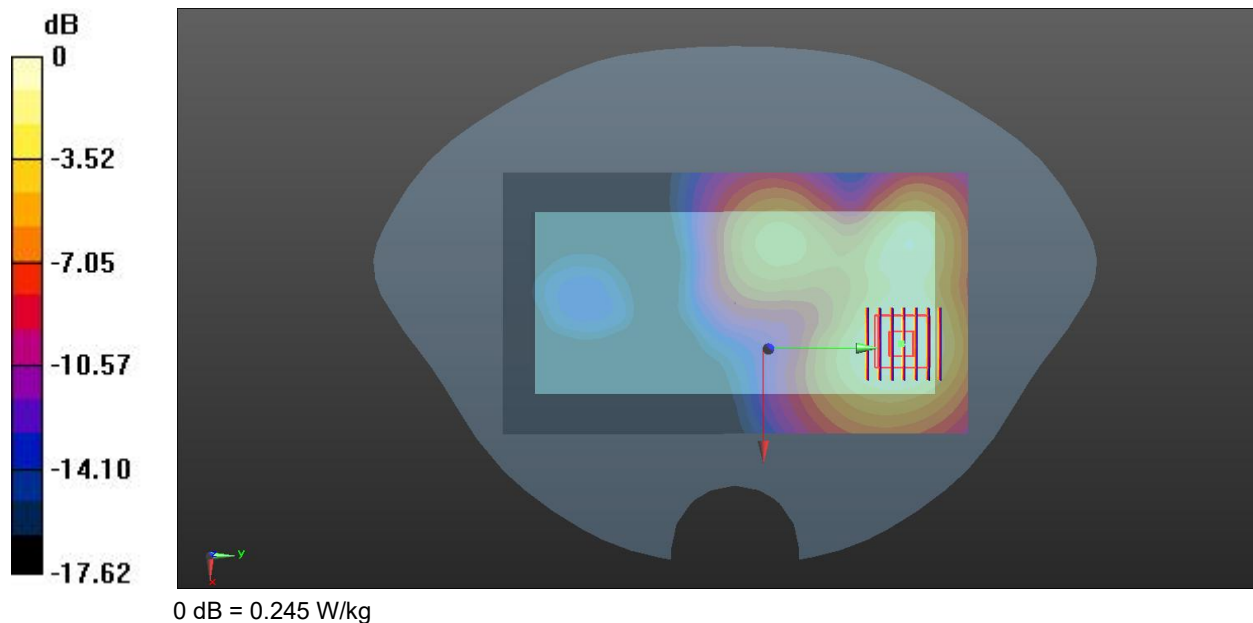

Meas.3 Body Plane with Back Side 10mm on 62 Channel in IEEE802.11n40 mode with ANT1

Date: 2026.03.25

Communication System Band: 5.3G; Frequency: 5310 MHz; Duty Cycle: 1:1.071

Medium parameters used (interpolated): $f = 5310$ MHz; $\sigma = 4.763$ S/m; $\epsilon_r = 35.738$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.37, 5.67, 5.46); Calibrated: 2025.08.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch62/Area Scan (111x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.38 W/kg

Ch62/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.747 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.300 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 1.39 W/kg

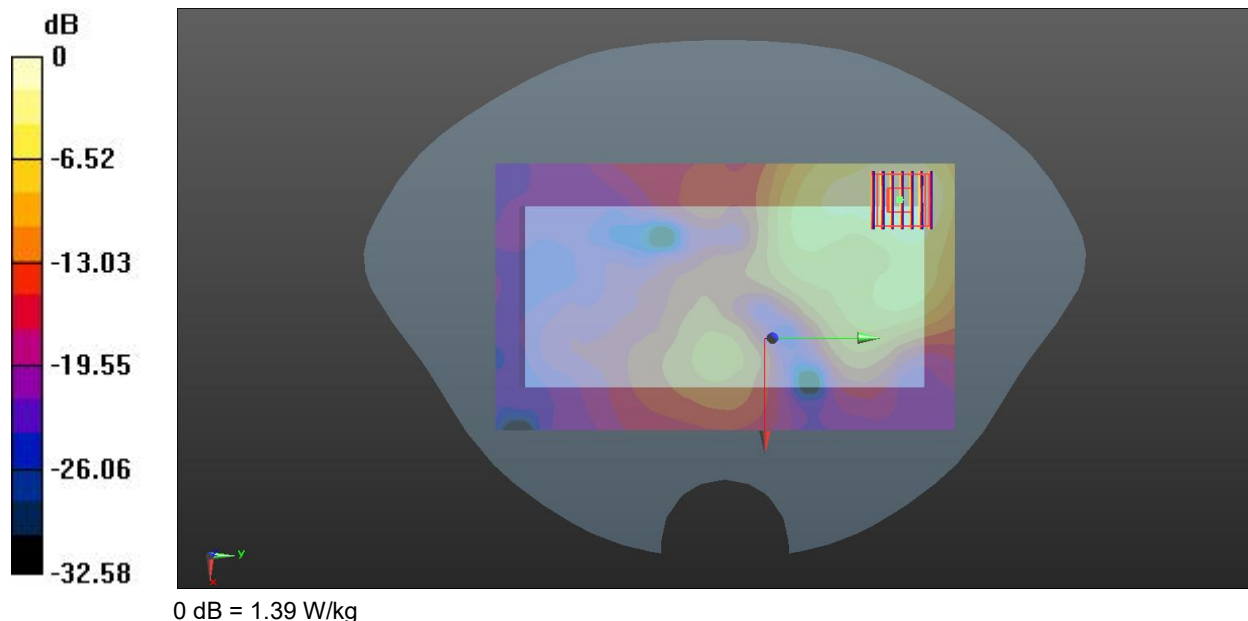

Meas.4 Body Plane with Back Side 10mm on 134 Channel in IEEE802.11n40 mode with ANT1

Date: 2026.03.26

Communication System Band: 5.6G; Frequency: 5670 MHz; Duty Cycle: 1:1.071

Medium parameters used (interpolated): $f = 5670$ MHz; $\sigma = 5.133$ S/m; $\epsilon_r = 35.137$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.14, 5.42, 5.22); Calibrated: 2025.08.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch134/Area Scan (111x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.62 W/kg

Ch134/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.104 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 3.30 W/kg

SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 1.64 W/kg

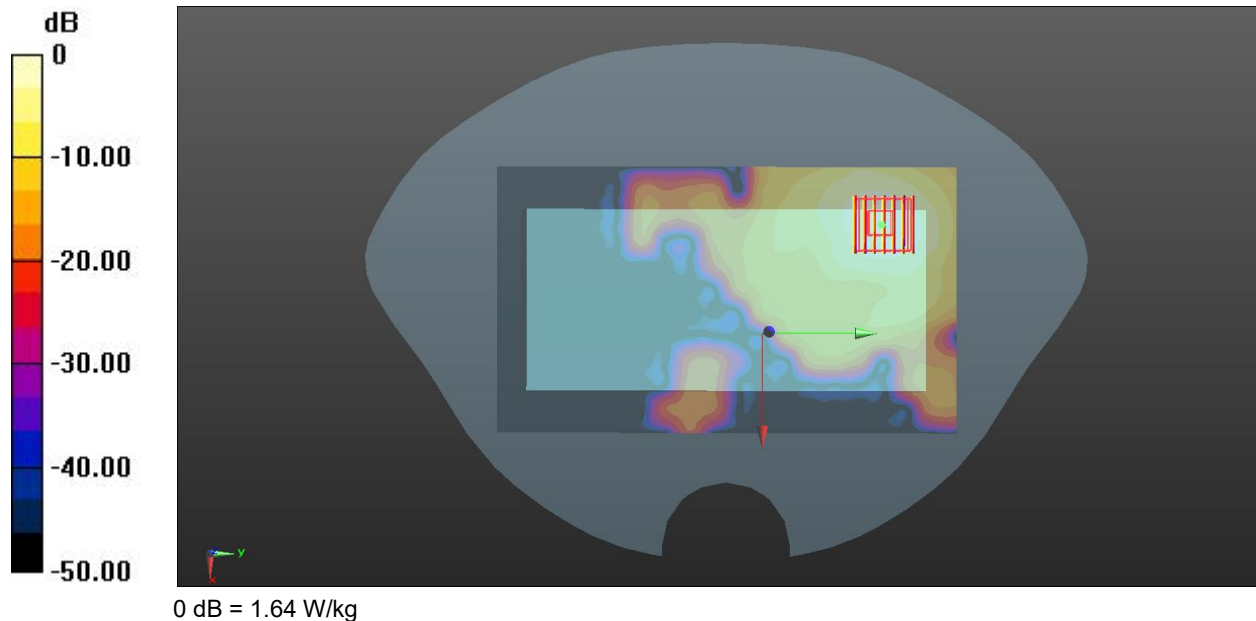

Meas.5 Body Plane with Back Side 10mm on 159 Channel in IEEE802.11n40 mode with ANT1

Date: 2026.03.26

Communication System Band: 5.8G; Frequency: 5795 MHz; Duty Cycle: 1:1.071

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 5.402$ S/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.1, 5.39, 5.18); Calibrated: 2025.08.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch159/Area Scan (111x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.60 W/kg

Ch159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.485 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 1.76 W/kg

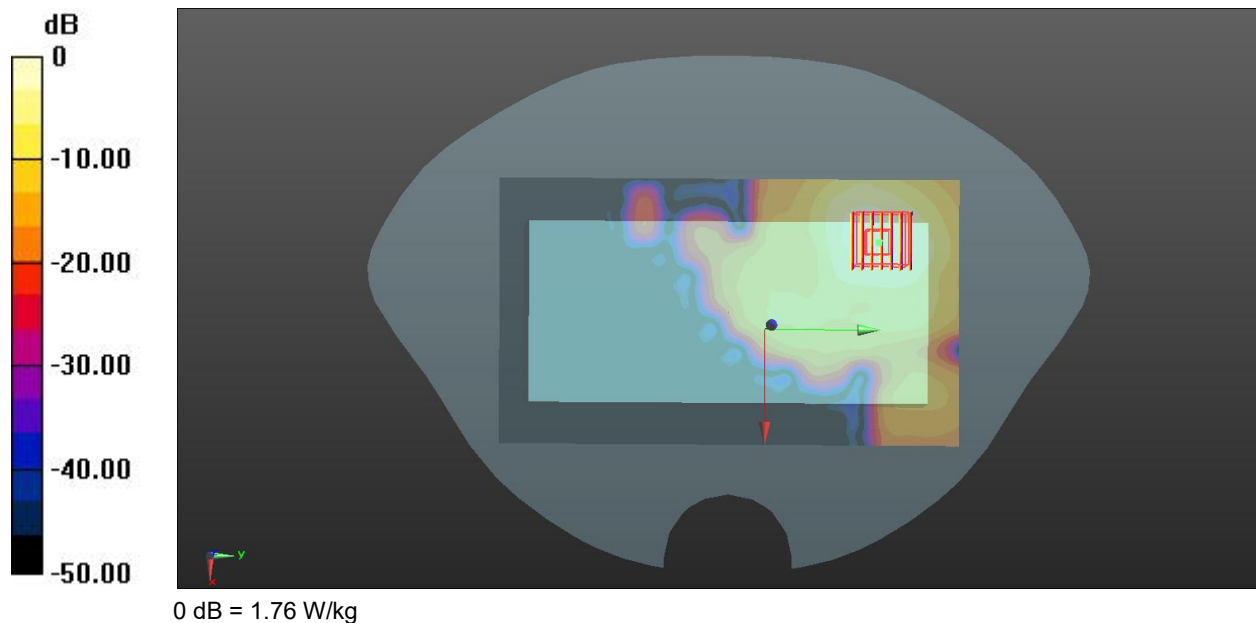

Meas.6 Limbs Plane with Right Edge 0mm on 39 Channel in Bluetooth mode with ANT1

Date: 2026.03.25

Communication System Band: 1; Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 39.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.291 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.629 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 0.286 W/kg

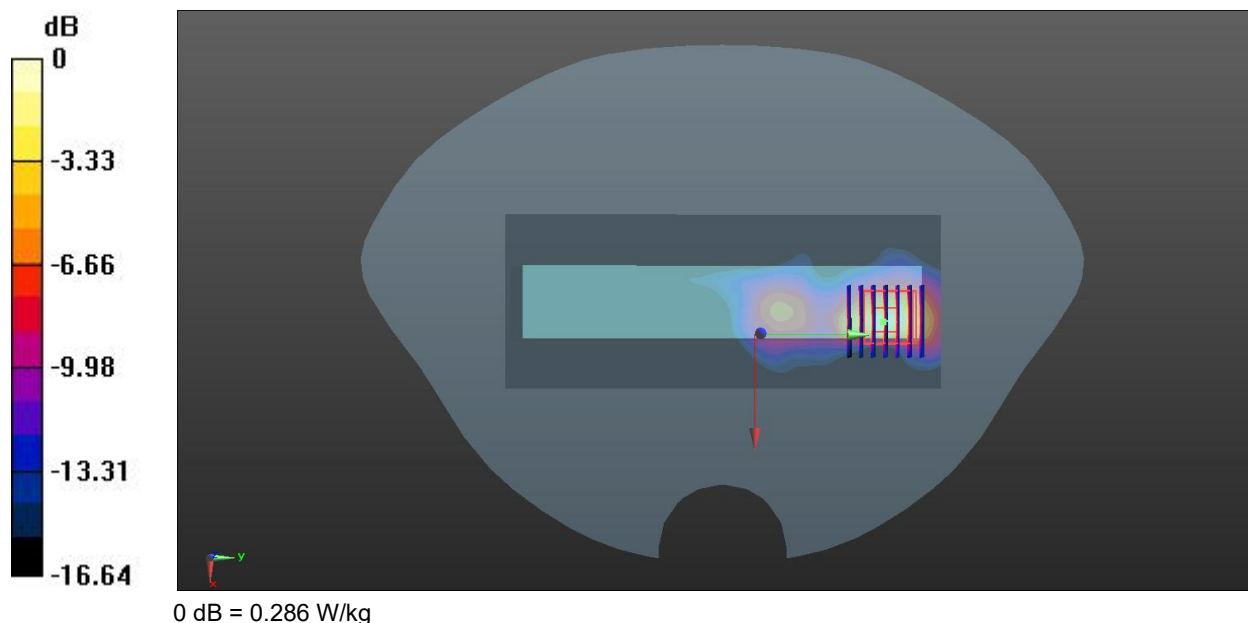

Meas.7 Limbs Plane with Right Edge 0mm on 11 Channel in IEEE802.11b mode with ANT1

Date: 2026.03.25

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.005

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.996$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.81 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.805 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.51 W/kg

SAR(1 g) = 1.59 W/kg; SAR(10 g) = 0.595 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 1.84 W/kg

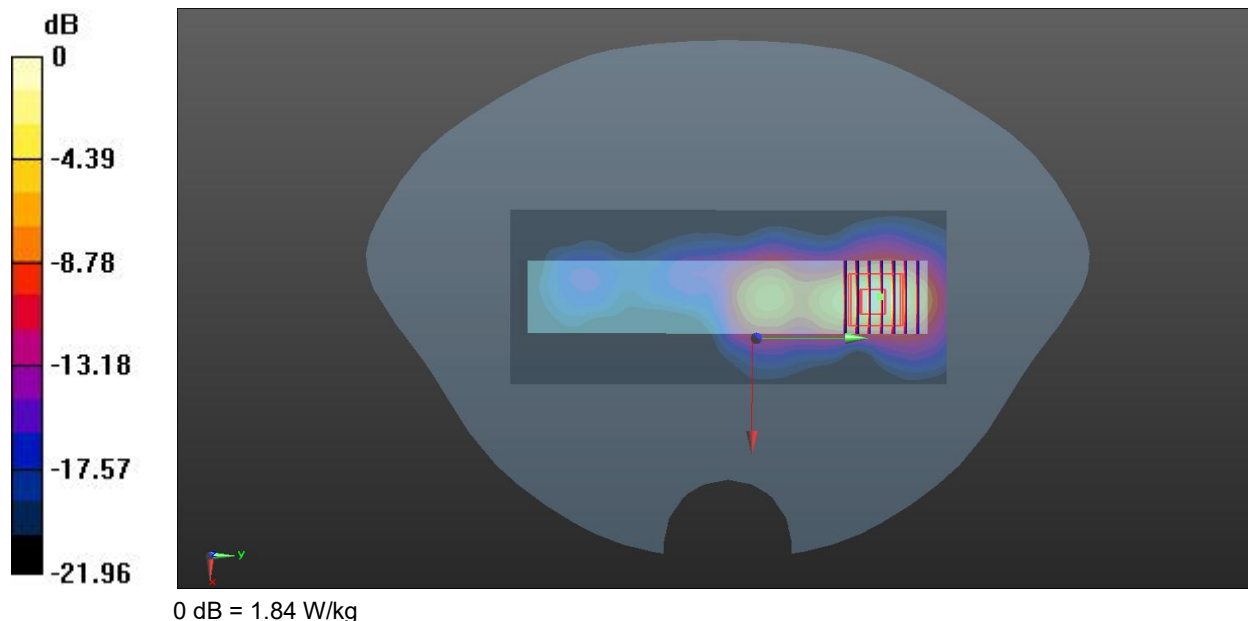

Meas.8 Limbs Plane with Right Edge 0mm on 54 Channel in IEEE802.11n40 mode with ANT1

Date: 2026.03.25

Communication System Band: 5.3G; Frequency: 5270 MHz; Duty Cycle: 1:1.071

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 35.884$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.37, 5.67, 5.46); Calibrated: 2025.08.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch54/Area Scan (61x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.85 W/kg

Ch54/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.139 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 3.57 W/kg; SAR(10 g) = 1.05 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 8.12 W/kg

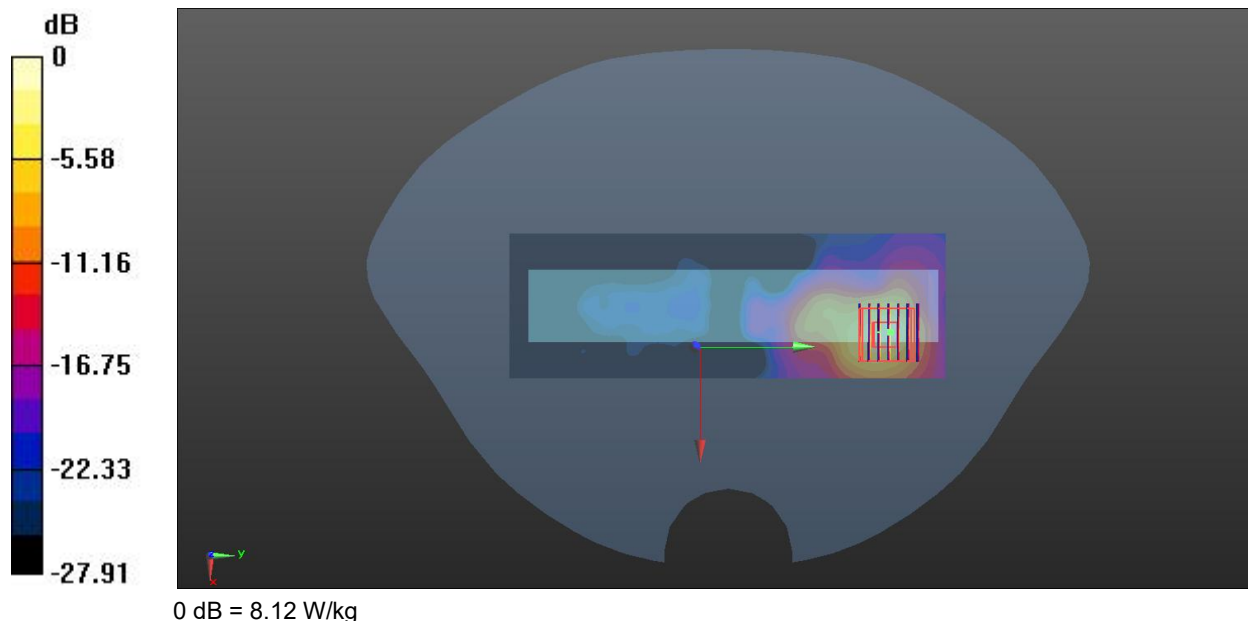

Meas.9 Limbs Plane with Back Side 0mm on 102 Channel in IEEE802.11n40 mode with ANT1

Date: 2026.03.26

Communication System Band: 5.6G; Frequency: 5510 MHz; Duty Cycle: 1:1.071

Medium parameters used (interpolated): $f = 5510$ MHz; $\sigma = 4.83$ S/m; $\epsilon_r = 35.673$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.14, 5.42, 5.22); Calibrated: 2025.08.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch102/Area Scan (111x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.23 W/kg

Ch102/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.906 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 2.68 W/kg; SAR(10 g) = 0.851 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 5.31 W/kg

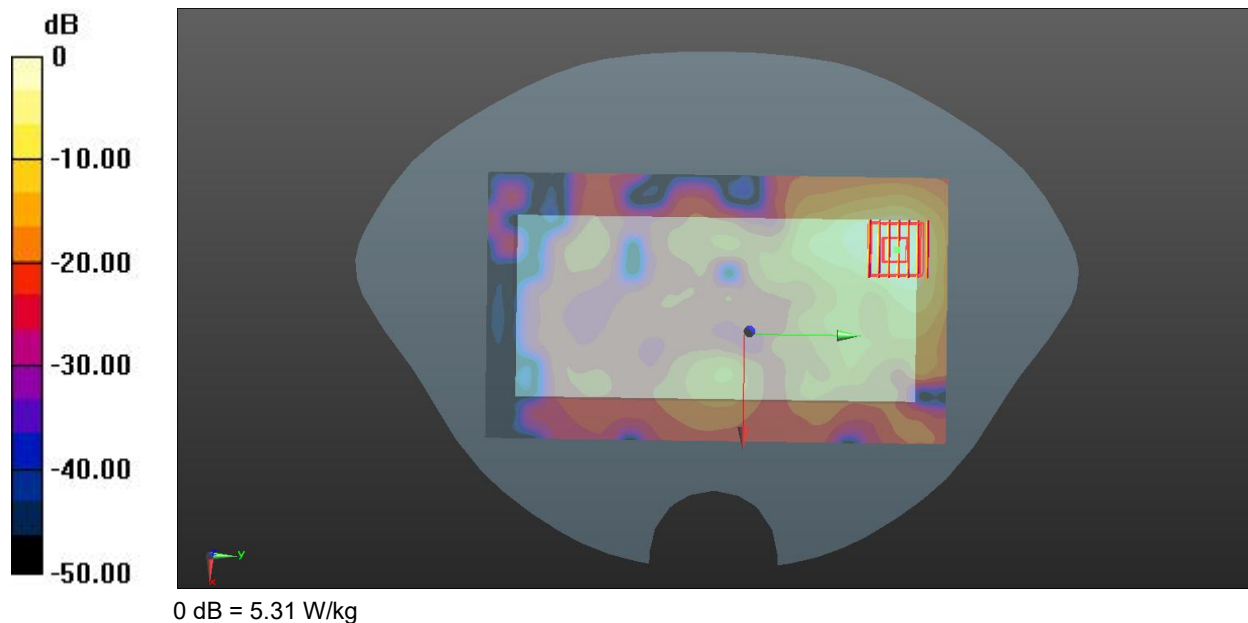

Meas.10 Limbs Plane with Back Side 0mm on 151 Channel in IEEE802.11n40 mode with ANT1

Date: 2026.03.26

Communication System Band: 5.8G; Frequency: 5755 MHz; Duty Cycle: 1:1.071

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 5.278$ S/m; $\epsilon_r = 34.815$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.1, 5.39, 5.18); Calibrated: 2025.08.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch151/Area Scan (111x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.12 W/kg

Ch151/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 8.51 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 0.749 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 4.34 W/kg

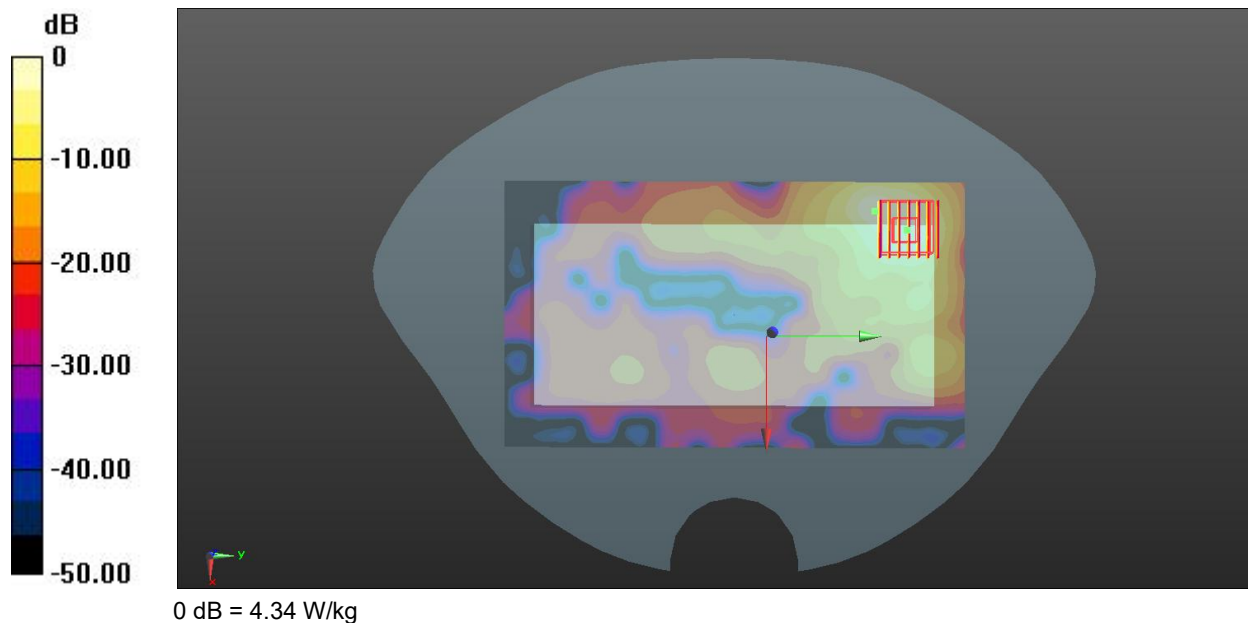

--BLANK BELOW--