



Test report No:
2040811R-RF-US-P06V01

FCC TEST REPORT & ISED TEST REPORT

Product Name	EZ-BT WICED Module
Trademark	Cypress
Model and /or type reference	CYBT-243068-02, CYBT-243069-02
FCC ID	WAP3068
IC ID	7922A-3068
Applicant's name / address	Cypress Semiconductor Technology (Shanghai) Co., Ltd. 198 Champion Ct, San Jose, California 95134, United States
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KD558074 D01 15.247 Meas Guidance v05r02 RSS-Gen Issue 5 / RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Kitty Li/Project Assistant 
Reviewed by (name / position & signature)	Frank He/ Technical Supervisor 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2020-05-28
Report template No	Template_FCC 15.247-RF-V1.0

INDEX

	page
General conditions	5
Environmental conditions	5
Possible test case verdicts	6
Abbreviations.....	6
Document History.....	7
Remarks and Comments	7
Used Equipment.....	8
Uncertainty	10
1 General Information	11
1.1 General Description of the Item(s).....	11
1.2 Antenna Information	12
1.3 Channel List.....	13
2 Description of Test Setup.....	14
2.1 Operating mode(s) used for tests	14
2.2 Auxiliary equipment / Test software for the EUT	14
2.3 Test Configuration / Block diagram used for tests.....	15
2.4 Testing process	16
3 Verdict summary section.....	17
3.1 Standards	17
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	17
3.3 Overview of results	18
3.4 Test Facility.....	20
4 Test Results	21
4.1 Conducted Emission.....	21
4.1.1 Limit	21
4.1.2 Test Setup	21
4.1.3 Test Procedure	21
4.1.4 Test Data	22
4.2 Emissions in restricted frequency bands	24
4.2.1 Limit	24
4.2.2 Test Setup	26
4.2.3 Test Procedure	27
4.2.4 Test Data	28
4.3 20dB Bandwidth.....	48

4.3.1	Limit	48
4.3.2	Test Setup	48
4.3.3	Test Procedure	48
4.3.4	Test Data	49
4.4	Carrier Frequency Separation	54
4.4.1	Limit	54
4.4.2	Test Setup	54
4.4.3	Test Procedure	54
4.4.4	Test Data	55
4.5	Number of hopping Frequencies	60
4.5.1	Limit	60
4.5.2	Test Setup	60
4.5.3	Test Procedure	60
4.5.4	Test Data	61
4.6	Time of Occupancy(Dwell Time)	62
4.6.1	Limit	62
4.6.2	Test Setup	62
4.6.3	Test Procedure	62
4.6.4	Test Data	63
4.7	Peak Output Power.....	66
4.7.1	Limit	66
4.7.2	Test Setup	66
4.7.3	Test Procedure	67
4.7.4	Test Data	68
4.8	Emissions in non-restricted frequency band	69
4.8.1	Limit	69
4.8.2	Test Setup	69
4.8.3	Test Procedure	69
4.8.4	Test Data	70
4.9	Duty cycle	71
4.9.1	Limit	71
4.9.2	Test Setup	71
4.9.3	Test Procedure	71
4.9.4	Test Data	72
4.10	Radiated Emission Band Edge	73
4.10.1	Limit	73
4.10.2	Test Setup	73



4.10.3	Test Procedure	73
4.10.4	Test Data	74
4.11	Antenna Requirement.....	98
4.11.1	Limit:	98
4.11.2	Antenna Connector Construction:	98
5	Test setup photo and EUT Photo	99

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Apr. 29, 2020
Date (start test)	May. 01, 2020
Date (finish test)	May. 25, 2020

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2040811R-RF-US-P06V01	V1.0	Initial issue of report.	2020-05-28

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result, unless the specification, standard or customer have special requirements.
4. The test results presented in this report relate only to the object tested.
5. The test results relate only to the samples tested.
6. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
7. This report will not be used for social proof function in China market.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2020.04.20	2021.04.19
Two-Line V-Network	R&S	ENV216	101190	2019.12.28	2020.12.27
Two-Line V-Network	R&S	ENV216	101044	2019.12.28	2020.12.27
Current Probe	R&S	EZ-17	100678	2020.03.12	2021.04.11
50ohm Termination	SHX	TF2	07081402	2019.09.02	2020.09.01
50ohm Termination	SHX	TF2	07081403	2019.09.02	2020.09.01
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2019.08.21	2020.08.20
Coaxial Cable	Suhner	RG 223	TR1-C1	2019.08.25	2020.08.24
Coaxial Cable	Suhner	RG 223	TR1-C2	2019.08.25	2020.08.24
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.09.28	2020.09.27
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2020.04.17	2021.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.08.30	2020.08.29
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2019.07.14	2020.07.13
Power Sensor	Anritsu	MA2411B	0846014	2019.08.12	2020.08.11
Coaxial Cable	Woken	SFL402	F02-150410-044	2020.01.01	2020.12.31
Dekra test software	Dekra	-	-	-	-

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2020.03.03	2021.03.02
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2019.09.23	2020.09.22
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2019.09.02	2020.09.01
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2020.04.13	2021.04.12
Dekra test software	Dekra	-	-	-	-

Radiated Emission / AC5(1GHz-40GHz)(Chamber details)

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2020.05.08	2021.05.07
Preamplifier	Miteq	NSP1800-25	1364185	2020.05.06	2021.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2020.05.06	2021.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2020.01.22	2021.01.21
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2019.09.02	2020.09.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2020.04.13	2021.04.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2020.04.13	2021.04.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2020.04.13	2021.04.12
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%. The Uncertainties comply with standard required as below.

Test item	Uncertainty
Conducted Emission	± 2.02 dB
Emissions in restricted frequency bands	above 1G : ± 3.9 dB below 1G is : ± 3.8 dB
20dB Bandwidth	± 1 kHz
Carrier Frequency Separation	± 1 kHz
Number of Hopping Frequencies	± 1 kHz
Time of Occupancy (Dwell Time)	± 0.1 us
Peak Output Power	± 1.0 dB
Emissions in non-restricted frequency bands	± 1.0 dB
Radiated Emission Band Edge	above 1G : ± 3.9 dB below 1G : ± 3.8 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	EZ-BT WICED Module		
Model No.	CYBT-243068-02, CYBT-243069-02		
Trademark	Cypress		
FCC ID	WAP3068		
IC	7922A-3068		
Factory	Wujiang Sigmatron Electronics Co., Ltd		
Factory Address	386 Huahong Rd, Wujiang, Suzhou, Jiangsu, China		
Model Differences.	Model CYBT-243069-02 is identical to Model CYBT-243068-02 except for whether there is a flash memory inside, this difference has no effect on RF performance. Details see table below.		
	Model No.	IC	Flash
	CYBT-243068-02	CYW20820	Y
	CYBT-243069-02	CYW20820	N

Wireless specification.....	Bluetooth					
Bluetooth Specification.....	V3.0					
Operating frequency range(s)	2400~2483.5MHz					
Type of Modulation.....	GFSK					
PHYS	☒	GFSK	☒	Pi/4 DQPSK	☒	8DPSK
Data Rate	☒	1Mbit/s	☒	2Mbit/s	☒	3Mbit/s
Number of channel.....	79					
Operating Temperature Range:	-40°C – 85 °C					

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☐	AC: 100 – 240 V, 50/60 Hz
	☒	DC: 2.6~3.3Vdc
	☐	Battery:
Mounting position	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☐	Hand-held equipment
	☒	Other: RF module

1.2 Antenna Information

Antenna model / type number	PCB Antenna			
Antenna serial number	N/A			
Antenna Delivery	☒	1TX + 1RX		
	☐	2TX + 2RX		
Antenna technology	☒	SISO		
	☐	MIMO	☐	CDD
			☐	Beam-forming
Antenna Type	☐	External	☐	Dipole
			☐	Sectorized
	☒	Internal	☐	PIFA
			☒	PCB
			☐	Metal Monopole Antenna
			☐	Ceramic chip
			☐	Others.....
Antenna Gain	-0.5dBi			

1.3 Channel List

Bluetooth Working Frequency of Each Channel: (For V3.0)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For Bluetooth	Mode 1: Transmitter-1Mbps(GFSK_DH5)
	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)
	Mode 3: Transmitter-3Mbps(8DPSK_DH5)
	Mode 4: Transmitter-Hopping


2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
software	Type / Version	Manufacturer	Supplied by
Bluetool	1.9.6.2	N/A	N/A


2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Power Line Conducted Emission Test

Chamber

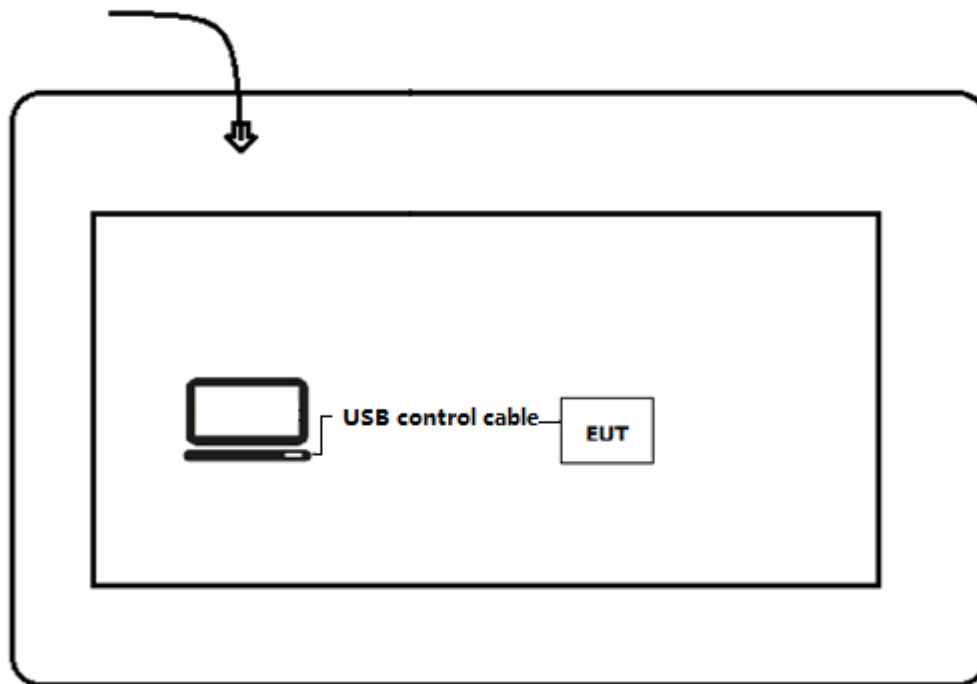

Test setup Diagram- Conducted test

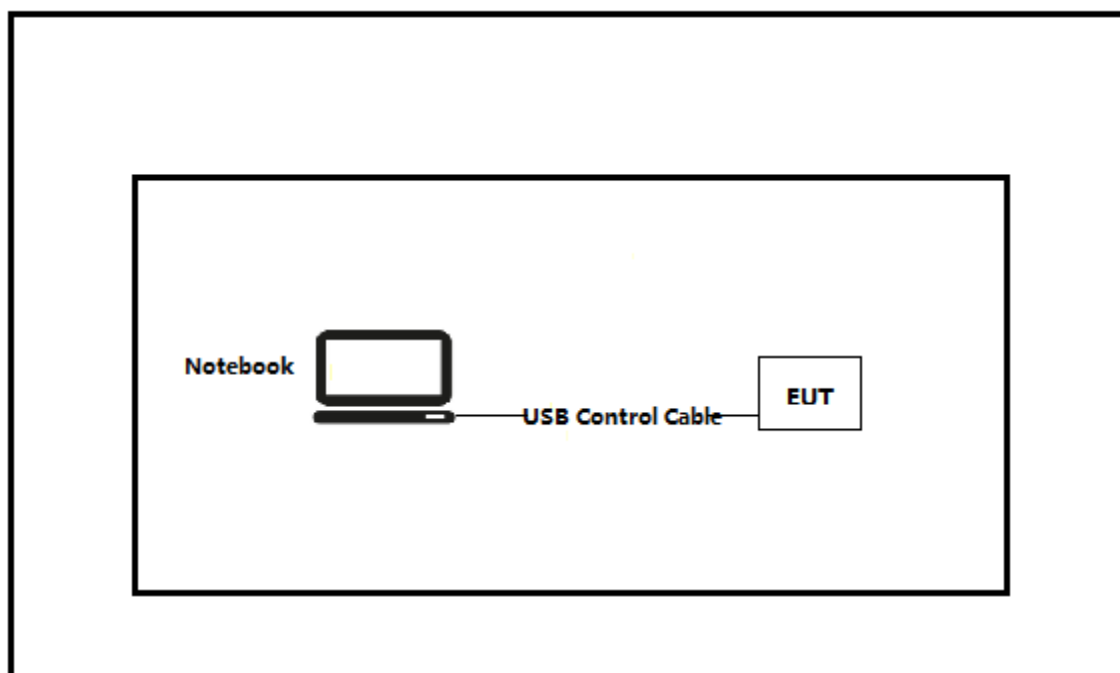

2.4 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Execute the Bluetool on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2019	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 1	2019	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	Yes	No
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	Yes	No
20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)	Yes	No
Carrier Frequency Separation	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)	Yes	No
Number of Hopping Frequencies	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)(iii)	Yes	No
Time of Occupancy (Dwell Time)	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)(iii)	Yes	No
Peak Output Power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(1)	Yes	No
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.215(c), 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)	Yes	No
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	Yes	No

For ISED

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	RSS-Gen Issue 5 Section 8.8	Yes	No
Radiated Emission	RSS-Gen Issue 5 Section 8.9	Yes	No
20dB Bandwidth	RSS-247 Issue 2 Section 5.1	Yes	No
Carrier Frequency Separation	RSS-247 Issue 2 Section 5.1	Yes	No
Number of Hopping Frequencies	RSS-247 Issue 2 Section 5.1	Yes	No
Time of Occupancy (Dwell Time)	RSS-247 Issue 2 Section 5.1	Yes	No
Peak Output Power	RSS-247 Issue 2 Section 5.4	Yes	No
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	Yes	No
Radiated Emission Band Edge	RSS-Gen Issue 5 Section 8.10	Yes	No
Antenna Requirement	RSS-Gen Issue 5 Section 8.3	Yes	No

Remarks: We have evaluated the surprious emission of both models, and only the worst data are shown below.

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

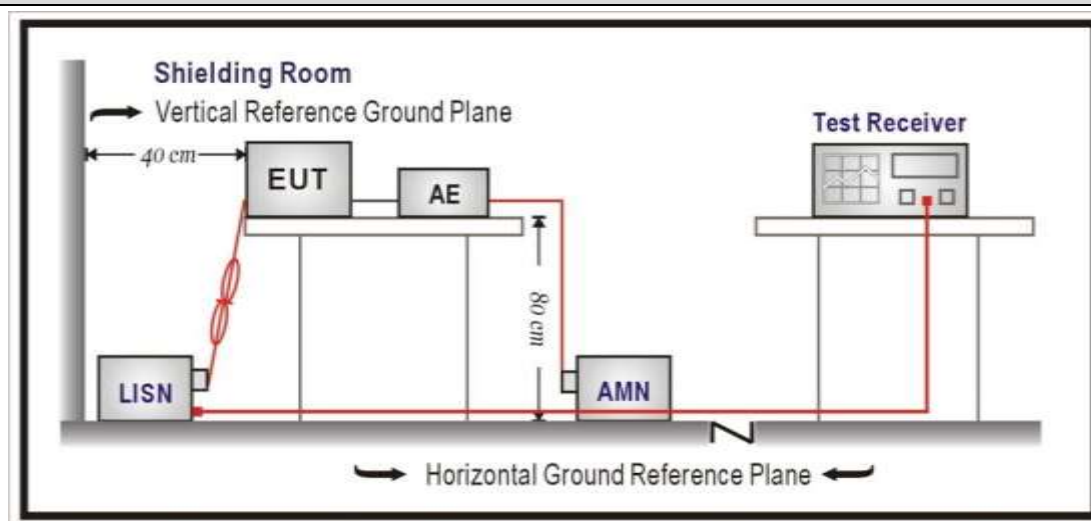

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

Engineer: Canon

Site: TR1

Time: 2020/05/12

Limit: FCC_Part15.207_CE_AC Power_ClassB

Margin: 0


Probe: ENV216_101190(0.009-30MHz)

Polarity: Line

EUT: EZ-BT WICED Module

Power: AC 120V/60Hz

Note: Mode 1

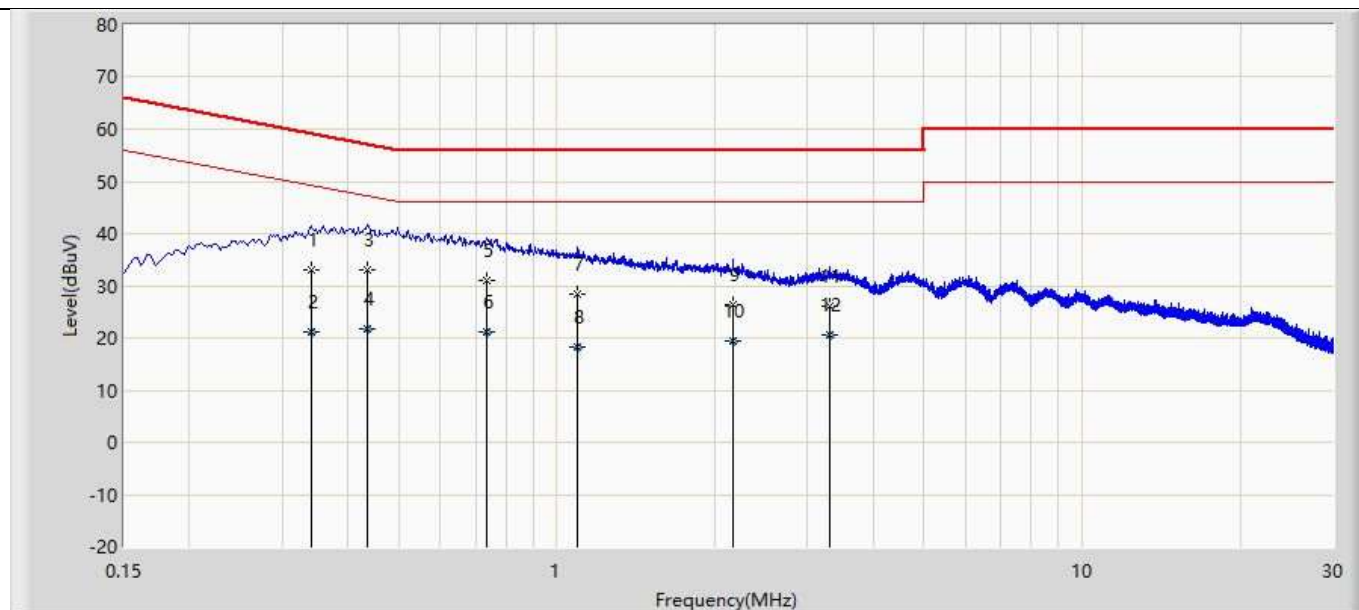

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.341	33.144	23.510	-26.028	59.173	9.599	0.035	0.000	QP
2		0.341	21.063	11.428	-28.110	49.173	9.599	0.035	0.000	AV
3	*	0.436	33.135	23.489	-24.008	57.142	9.605	0.040	0.000	QP
4		0.436	21.661	12.015	-25.482	47.142	9.605	0.040	0.000	AV
5		0.735	30.889	21.218	-25.111	56.000	9.621	0.051	0.000	QP
6		0.735	21.212	11.540	-24.788	46.000	9.621	0.051	0.000	AV
7		1.093	28.546	18.853	-27.454	56.000	9.631	0.062	0.000	QP
8		1.093	18.199	8.506	-27.801	46.000	9.631	0.062	0.000	AV
9		2.162	26.308	16.573	-29.692	56.000	9.644	0.091	0.000	QP
10		2.162	19.366	9.631	-26.634	46.000	9.644	0.091	0.000	AV
11		3.309	25.952	16.166	-30.048	56.000	9.671	0.115	0.000	QP
12		3.309	20.506	10.720	-25.494	46.000	9.671	0.115	0.000	AV

Engineer: Canon

Site: TR1

Time: 2020/05/12

Limit: FCC_Part15.207_CE_AC Power_ClassB

Margin: 0


Probe: ENV216_101190(0.009-30MHz)

Polarity: Neutral

EUT: EZ-BT WICED Module

Power: AC 120V/60Hz

Note: Mode 1

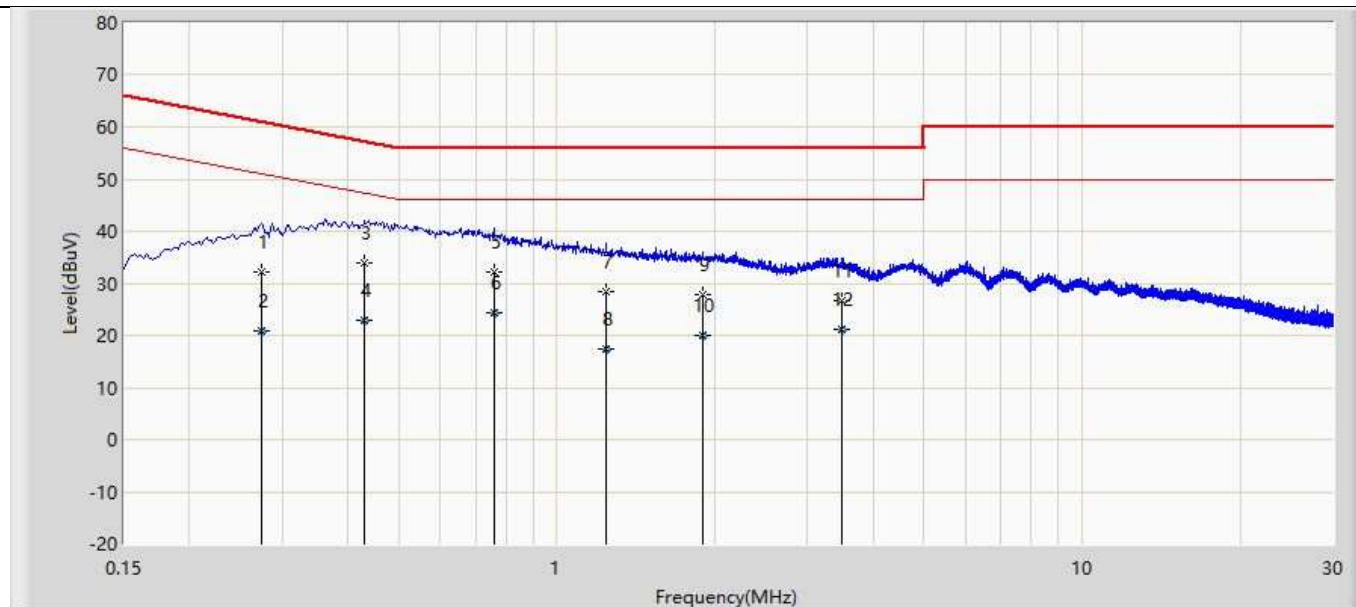

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.274	32.186	22.559	-28.817	61.003	9.595	0.033	0.000	QP
2		0.274	20.786	11.158	-30.217	51.003	9.595	0.033	0.000	AV
3		0.431	33.796	24.151	-23.433	57.229	9.605	0.040	0.000	QP
4		0.431	23.043	13.398	-24.185	47.229	9.605	0.040	0.000	AV
5		0.760	32.117	22.444	-23.883	56.000	9.622	0.051	0.000	QP
6	*	0.760	24.410	14.737	-21.590	46.000	9.622	0.051	0.000	AV
7		1.239	28.547	18.851	-27.453	56.000	9.630	0.066	0.000	QP
8		1.239	17.323	7.627	-28.677	46.000	9.630	0.066	0.000	AV
9		1.898	27.747	18.032	-28.253	56.000	9.630	0.085	0.000	QP
10		1.898	20.003	10.289	-25.997	46.000	9.630	0.085	0.000	AV
11		3.485	26.709	16.921	-29.291	56.000	9.670	0.118	0.000	QP
12		3.485	21.025	11.237	-24.975	46.000	9.670	0.118	0.000	AV

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.207

Restricted Bands of operation for FCC

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Bands of operation for ISCED

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

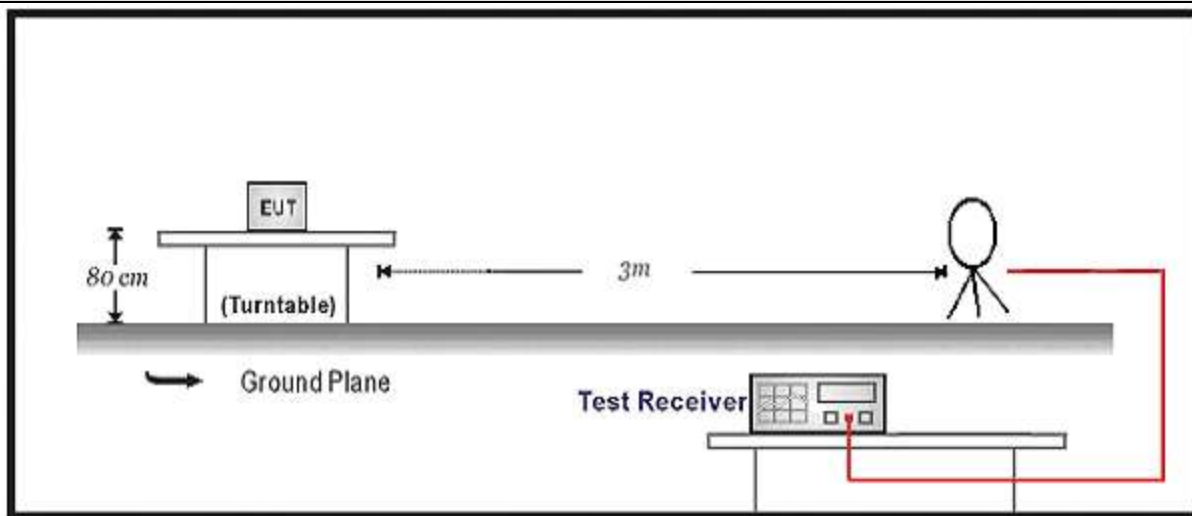

30MHz-1GHz Test Setup:

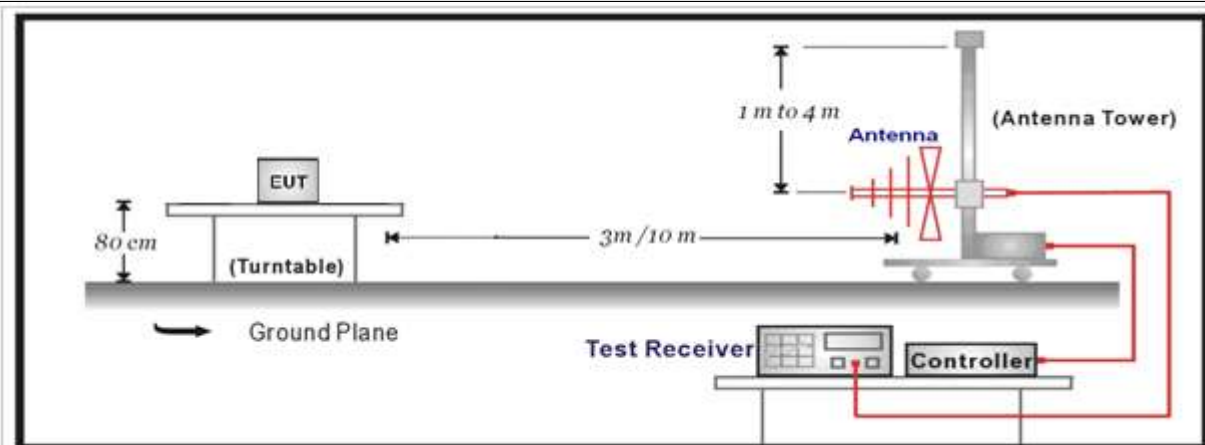

Above 1GHz Test Setup:

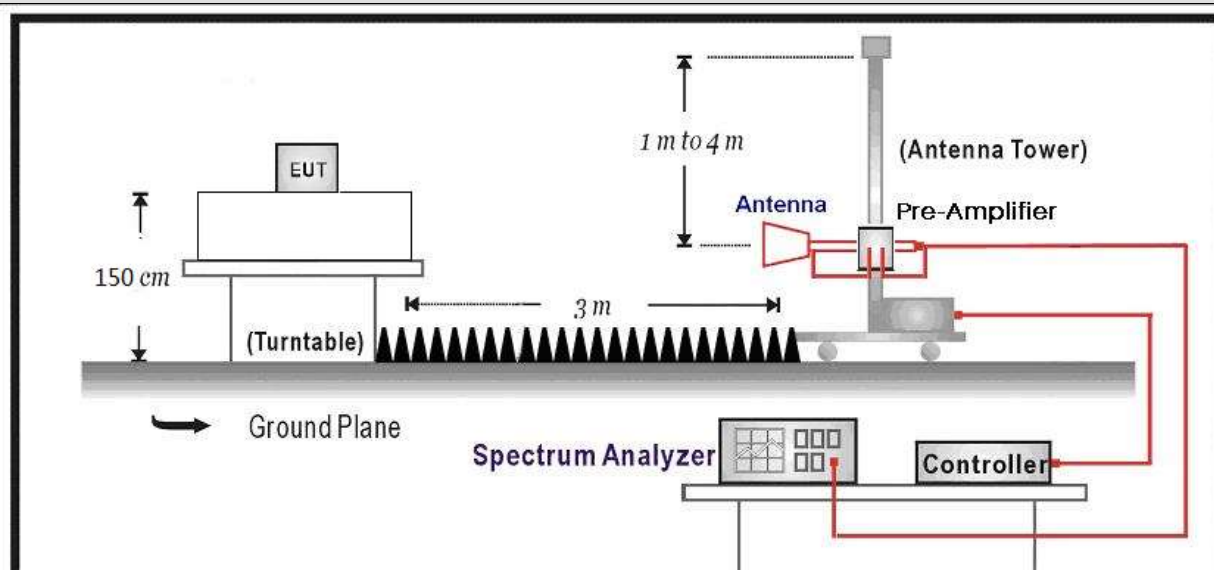


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
		☒ ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		☒ ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		☒ ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 2040811R	Page No.: 71
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by DH5	

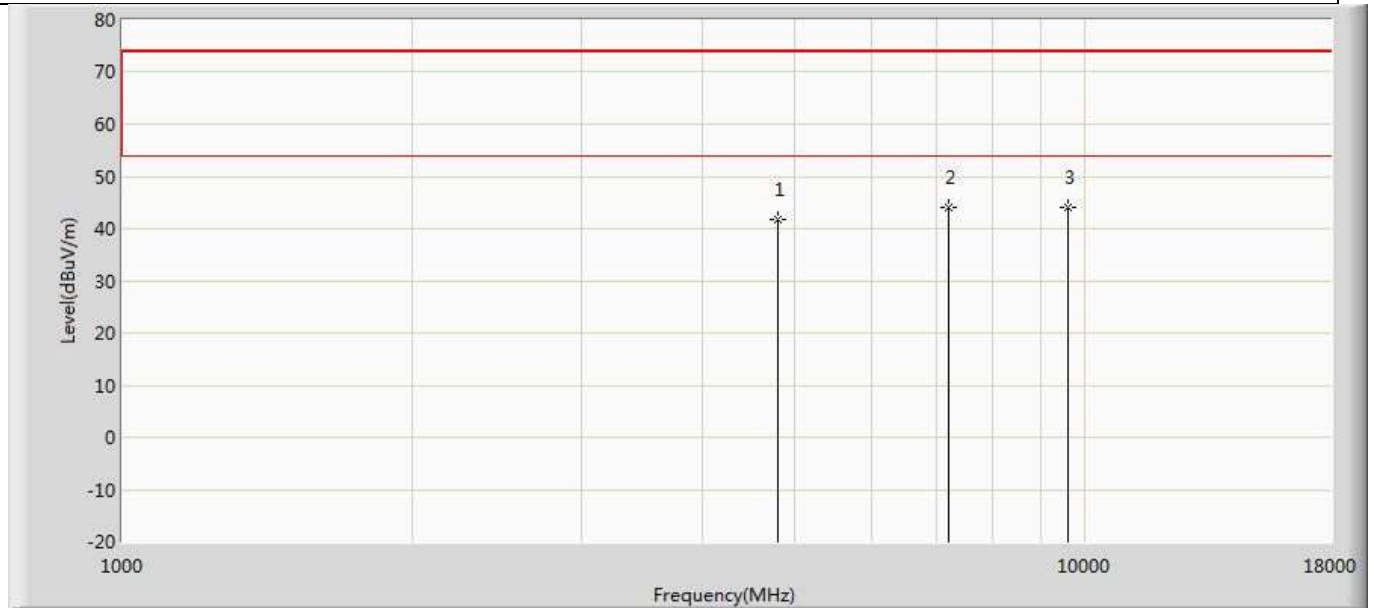


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.720	38.059	-32.280	74.000	3.662	PK
2		7206.000	43.996	37.333	-30.004	74.000	6.663	PK
3	*	9608.000	44.072	35.936	-29.928	74.000	8.137	PK

Profile: 2040811R	Page No.: 72
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by DH5	

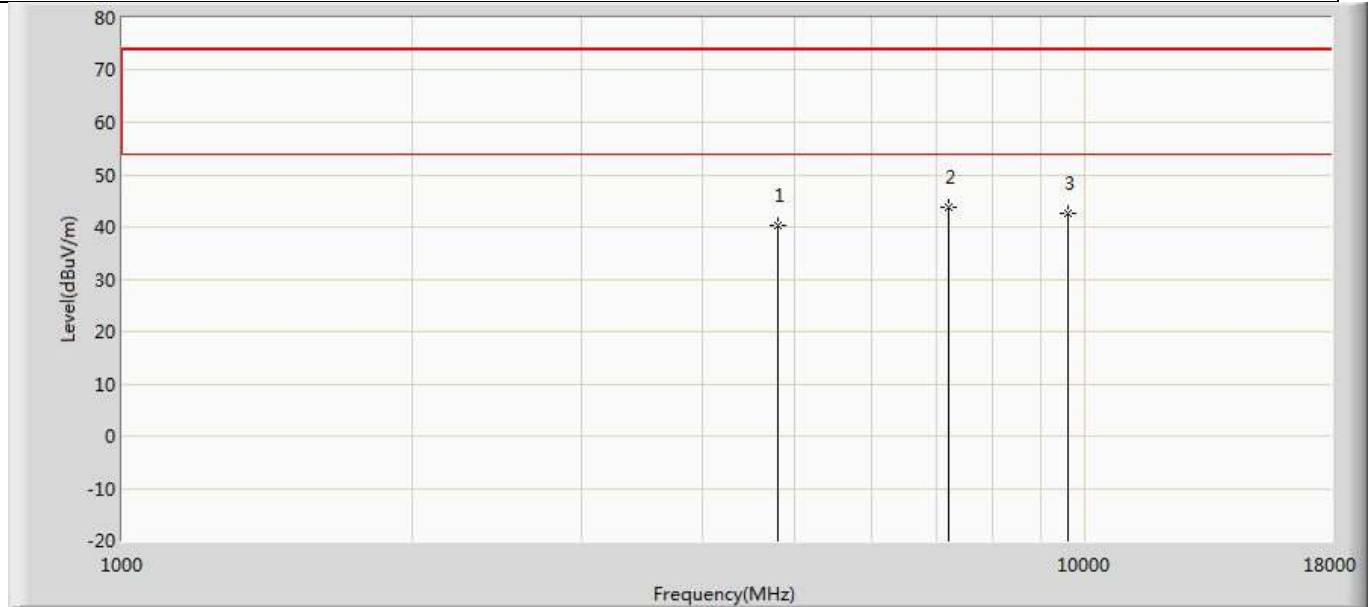


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.229	36.568	-33.771	74.000	3.662	PK
2	*	7206.000	43.745	37.082	-30.255	74.000	6.663	PK
3		9608.000	42.613	34.477	-31.387	74.000	8.137	PK

Profile: 2040811R	Page No.: 73
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2441MHz by DH5	

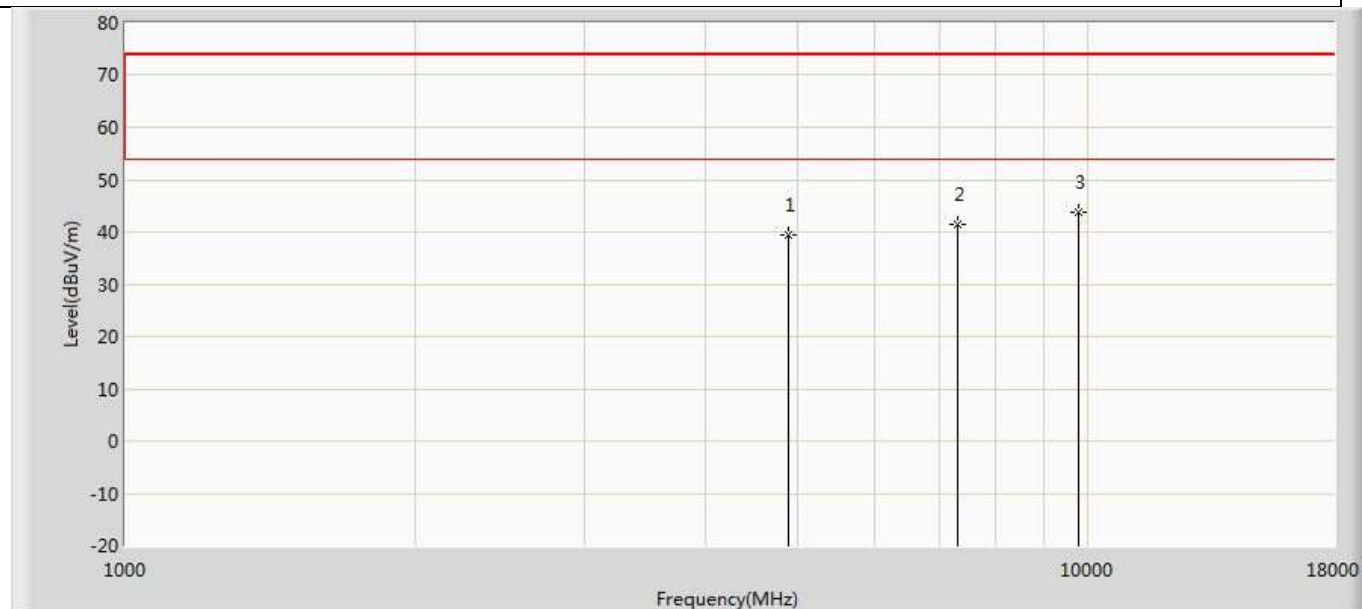


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	39.343	35.725	-34.657	74.000	3.619	PK
2		7323.000	41.408	34.705	-32.592	74.000	6.702	PK
3	*	9764.000	43.625	34.857	-30.375	74.000	8.767	PK

Profile: 2040811R	Page No.: 74
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2441MHz by DH5	

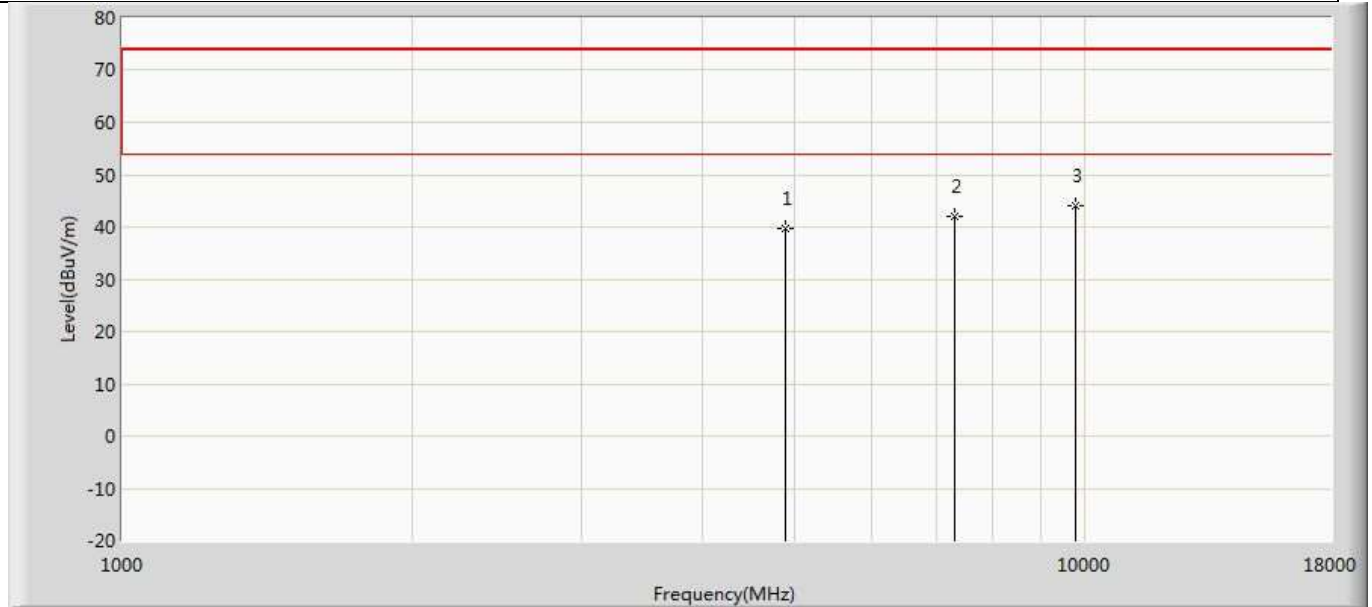


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	39.703	36.085	-34.297	74.000	3.619	PK
2		7323.000	42.053	35.350	-31.947	74.000	6.702	PK
3	*	9764.000	43.949	35.181	-30.051	74.000	8.767	PK

Profile: 2040811R	Page No.: 75
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by DH5	

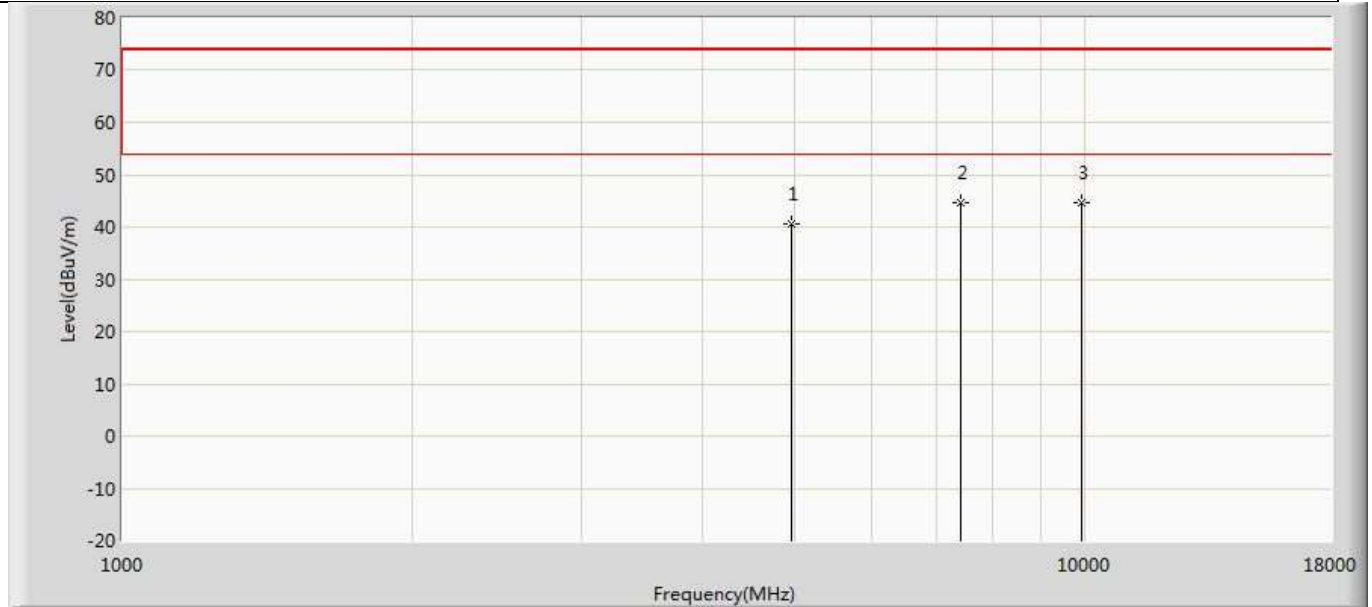


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.681	37.070	-33.319	74.000	3.611	PK
2	*	7440.000	44.652	38.067	-29.348	74.000	6.585	PK
3		9920.000	44.514	35.789	-29.486	74.000	8.725	PK

Profile: 2040811R	Page No.: 76
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by DH5	

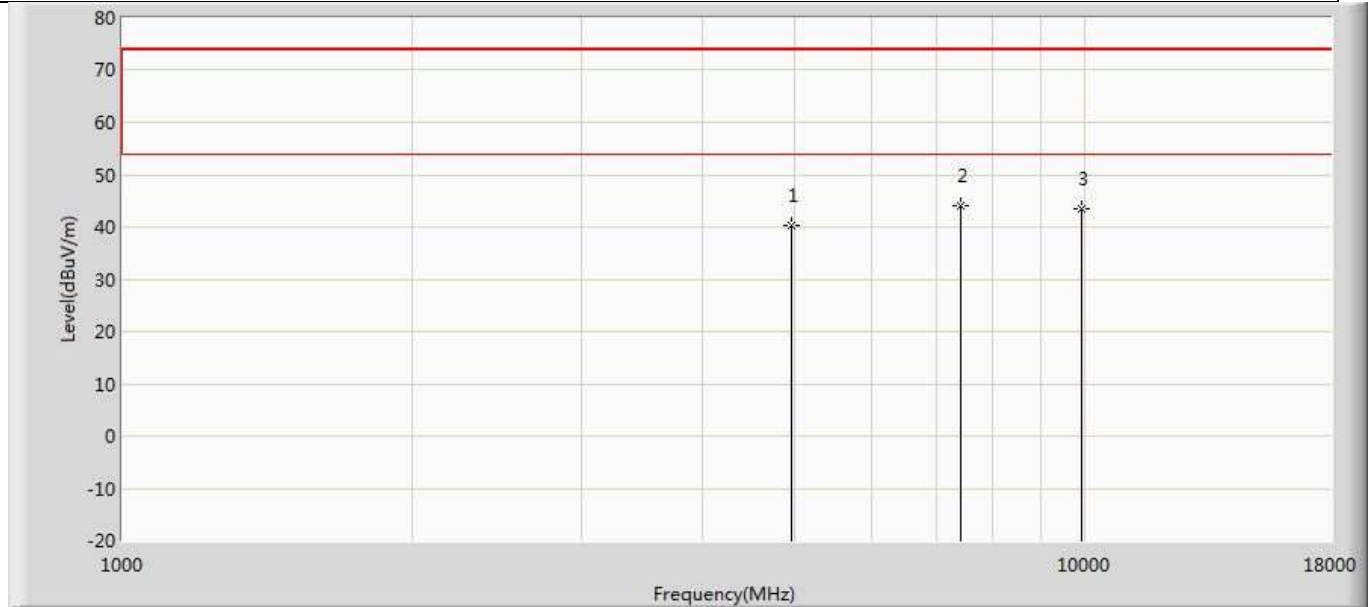


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.181	36.570	-33.819	74.000	3.611	PK
2	*	7440.000	44.149	37.564	-29.851	74.000	6.585	PK
3		9920.000	43.402	34.677	-30.598	74.000	8.725	PK

Profile: 2040811R	Page No.: 77
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

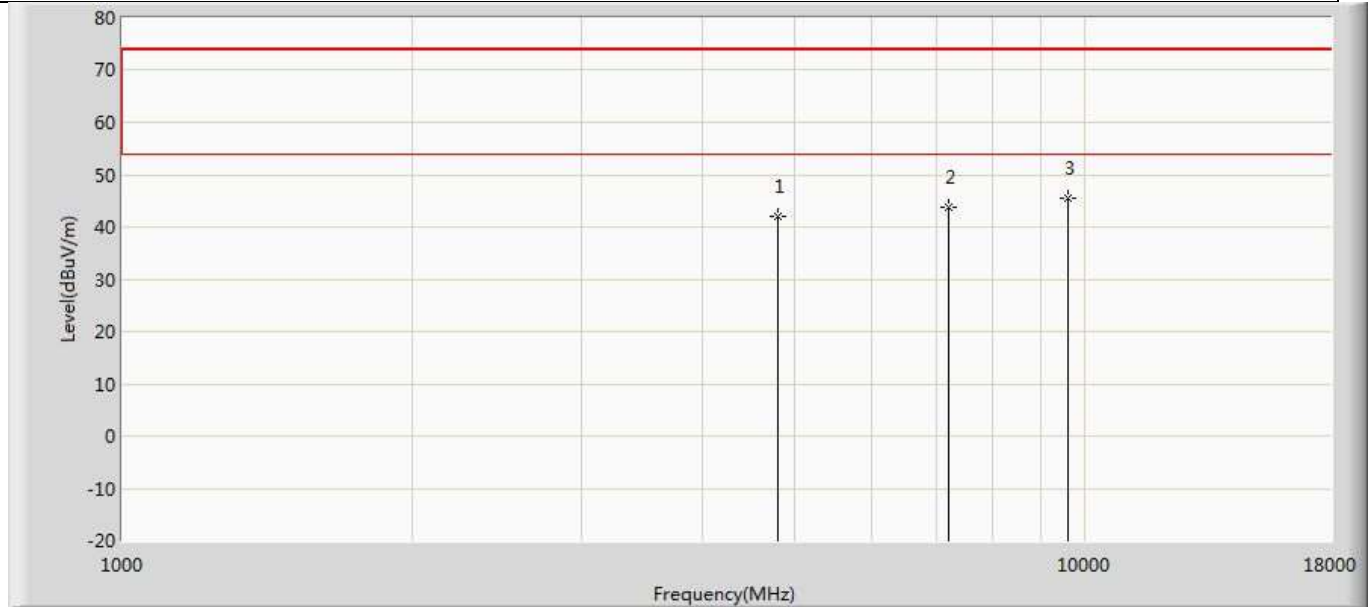


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	42.033	38.372	-31.967	74.000	3.662	PK
2		7206.000	43.661	36.998	-30.339	74.000	6.663	PK
3	*	9608.000	45.381	37.245	-28.619	74.000	8.137	PK

Profile: 2040811R	Page No.: 78
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

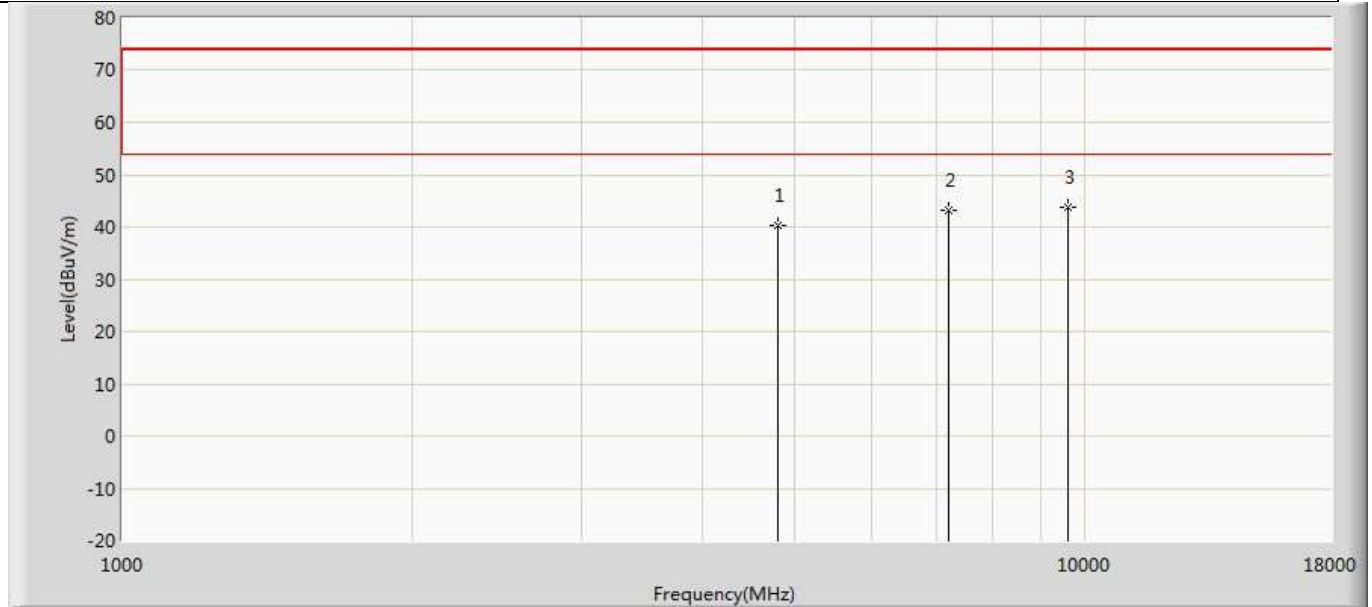


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.378	36.717	-33.622	74.000	3.662	PK
2		7206.000	43.154	36.491	-30.846	74.000	6.663	PK
3	*	9608.000	43.836	35.700	-30.164	74.000	8.137	PK

Profile: 2040811R	Page No.: 79
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2441MHz by 2DH5	

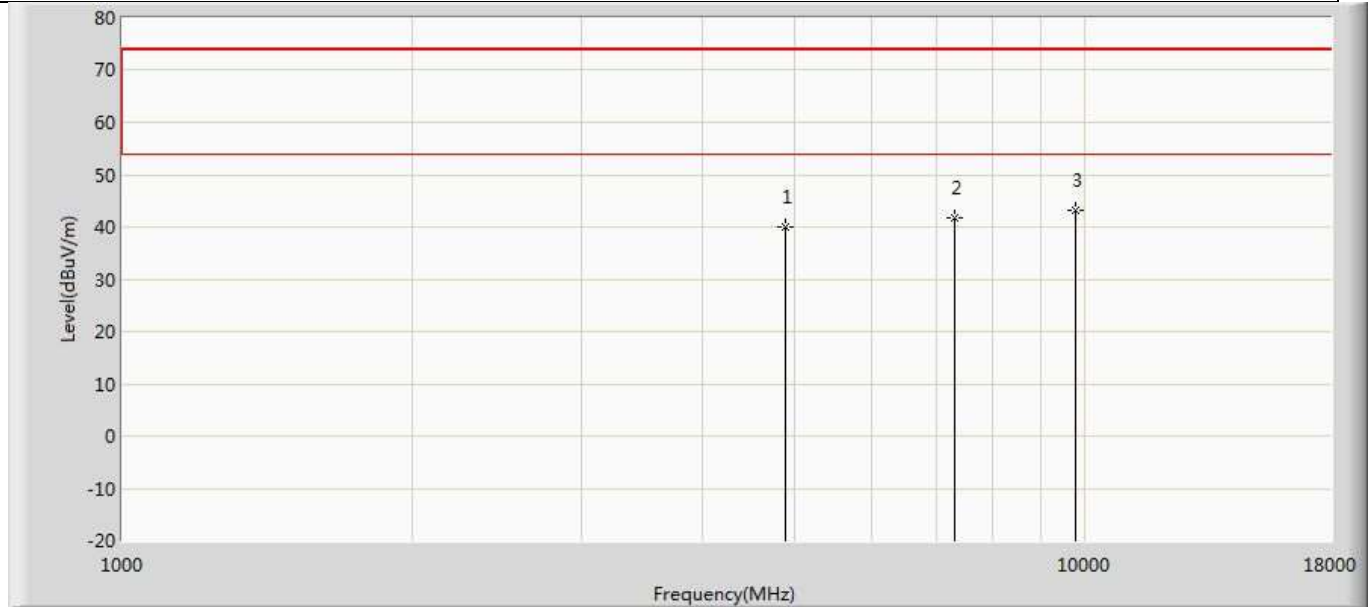


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	39.917	36.299	-34.083	74.000	3.619	PK
2		7323.000	41.838	35.135	-32.162	74.000	6.702	PK
3	*	9764.000	43.114	34.346	-30.886	74.000	8.767	PK

Profile: 2040811R	Page No.: 80
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2441MHz by 2DH5	

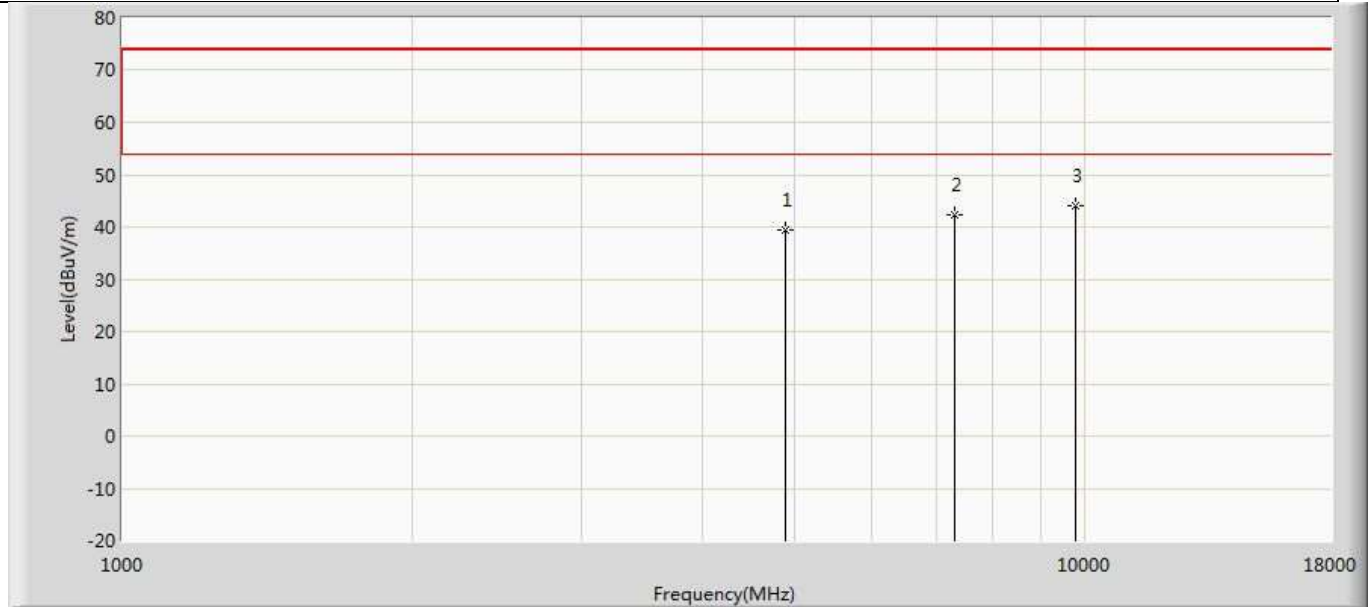


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	39.366	35.748	-34.634	74.000	3.619	PK
2		7323.000	42.460	35.757	-31.540	74.000	6.702	PK
3	*	9764.000	43.998	35.230	-30.002	74.000	8.767	PK

Profile: 2040811R	Page No.: 81
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

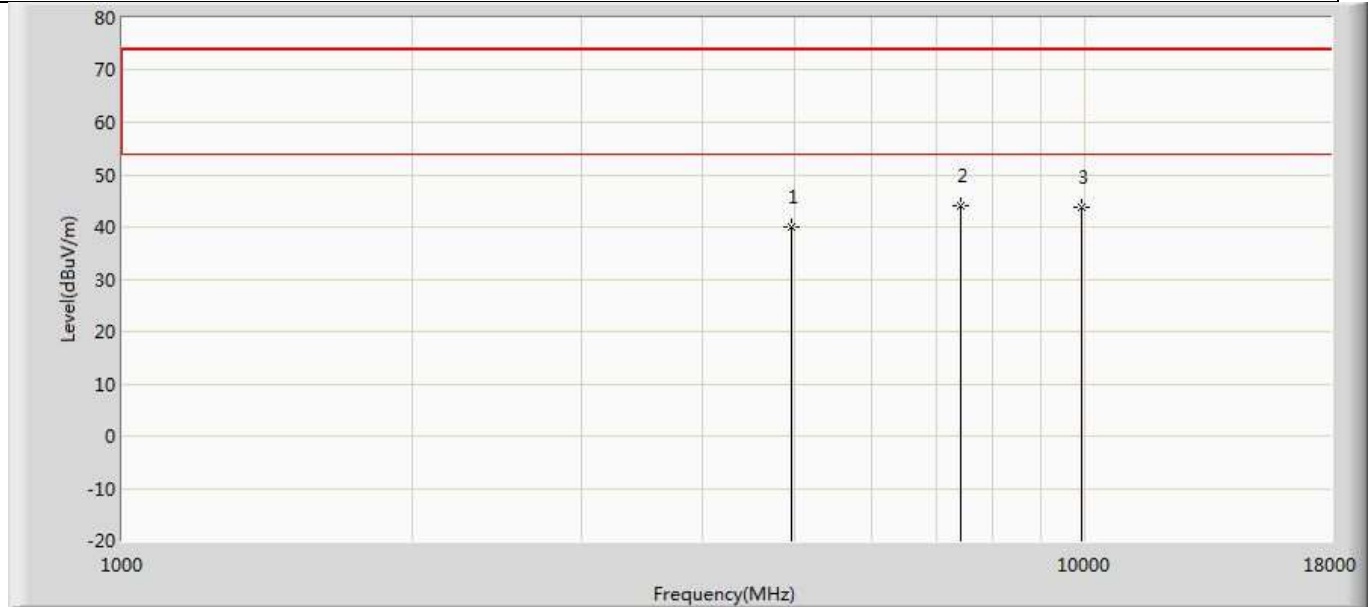


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.133	36.522	-33.867	74.000	3.611	PK
2	*	7440.000	44.052	37.467	-29.948	74.000	6.585	PK
3		9920.000	43.908	35.183	-30.092	74.000	8.725	PK

Profile: 2040811R	Page No.: 82
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

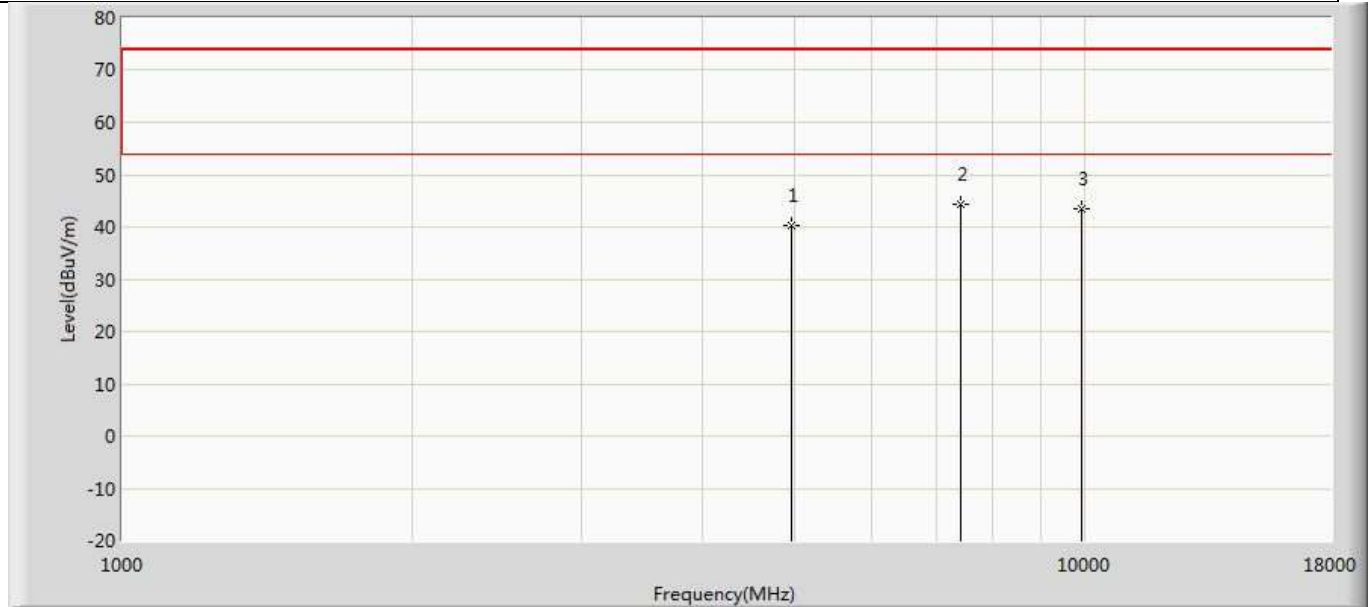


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.286	36.675	-33.714	74.000	3.611	PK
2	*	7440.000	44.465	37.880	-29.535	74.000	6.585	PK
3		9920.000	43.620	34.895	-30.380	74.000	8.725	PK

Profile: 2040811R	Page No.: 83
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

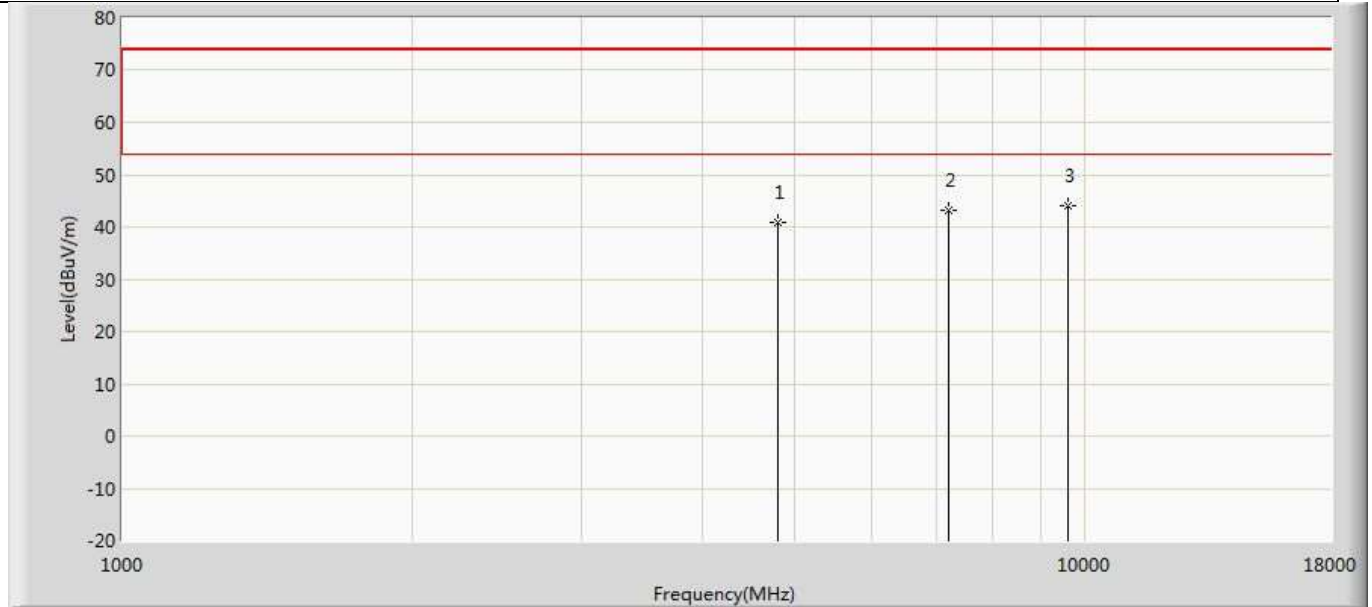


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.748	37.087	-33.252	74.000	3.662	PK
2		7206.000	43.319	36.656	-30.681	74.000	6.663	PK
3	*	9608.000	44.017	35.881	-29.983	74.000	8.137	PK

Profile: 2040811R	Page No.: 84
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

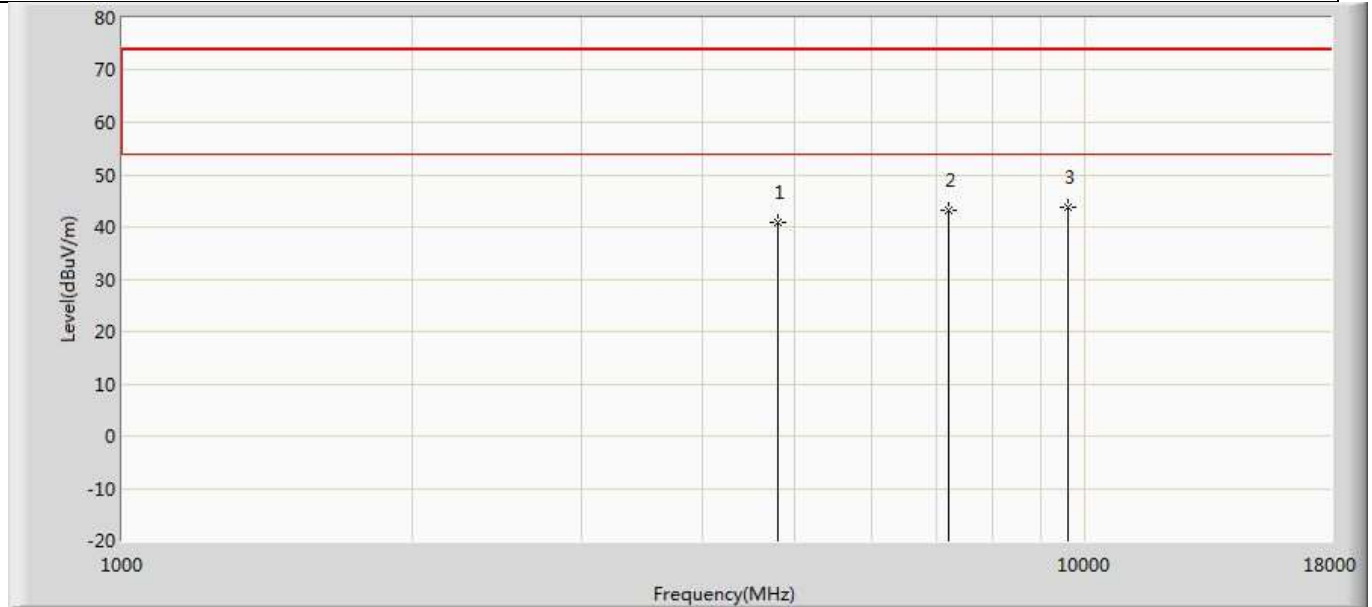


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.957	37.296	-33.043	74.000	3.662	PK
2		7206.000	43.125	36.462	-30.875	74.000	6.663	PK
3	*	9608.000	43.624	35.488	-30.376	74.000	8.137	PK

Profile: 2040811R	Page No.: 85
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2441MHz by 3DH5	

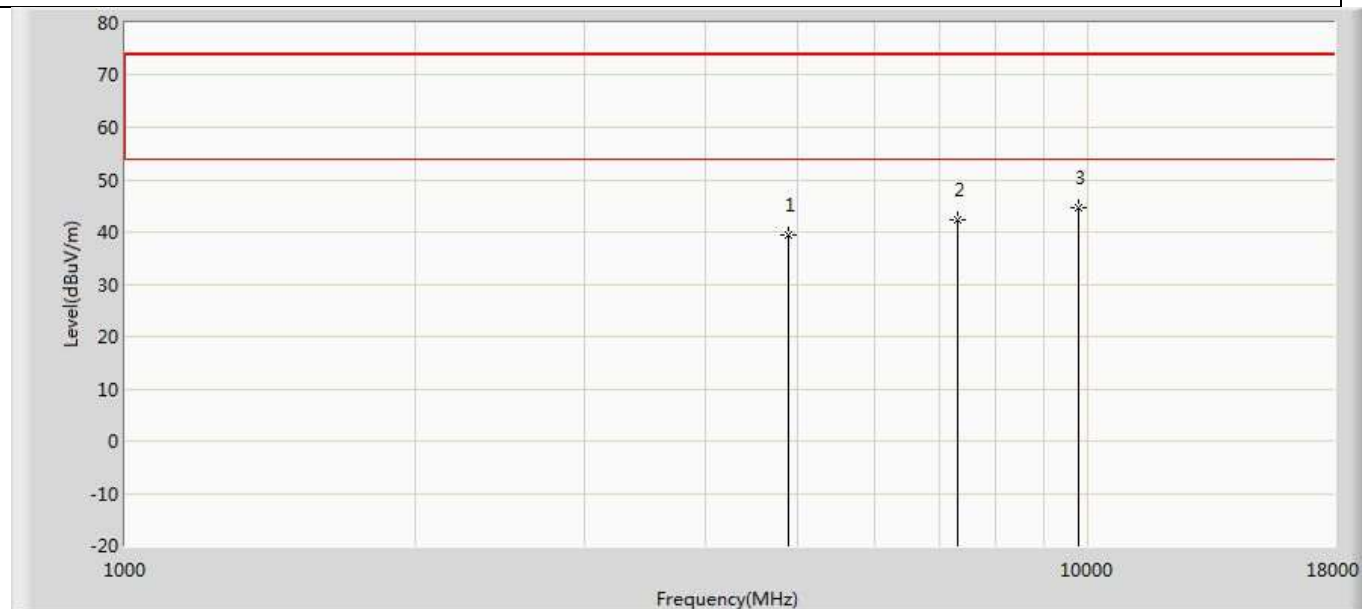


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	39.559	35.941	-34.441	74.000	3.619	PK
2		7323.000	42.288	35.585	-31.712	74.000	6.702	PK
3	*	9764.000	44.742	35.974	-29.258	74.000	8.767	PK

Profile: 2040811R	Page No.: 86
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2441MHz by 3DH5	

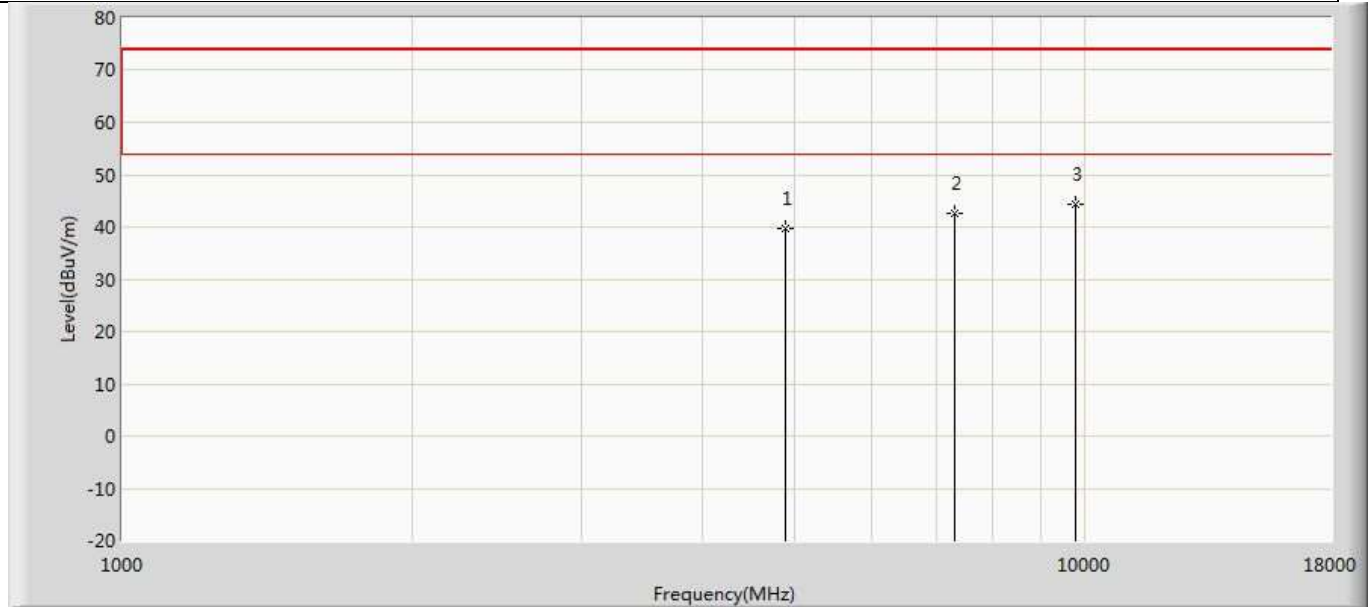


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	39.581	35.963	-34.419	74.000	3.619	PK
2		7323.000	42.484	35.781	-31.516	74.000	6.702	PK
3	*	9764.000	44.477	35.709	-29.523	74.000	8.767	PK

Profile: 2040811R	Page No.: 87
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

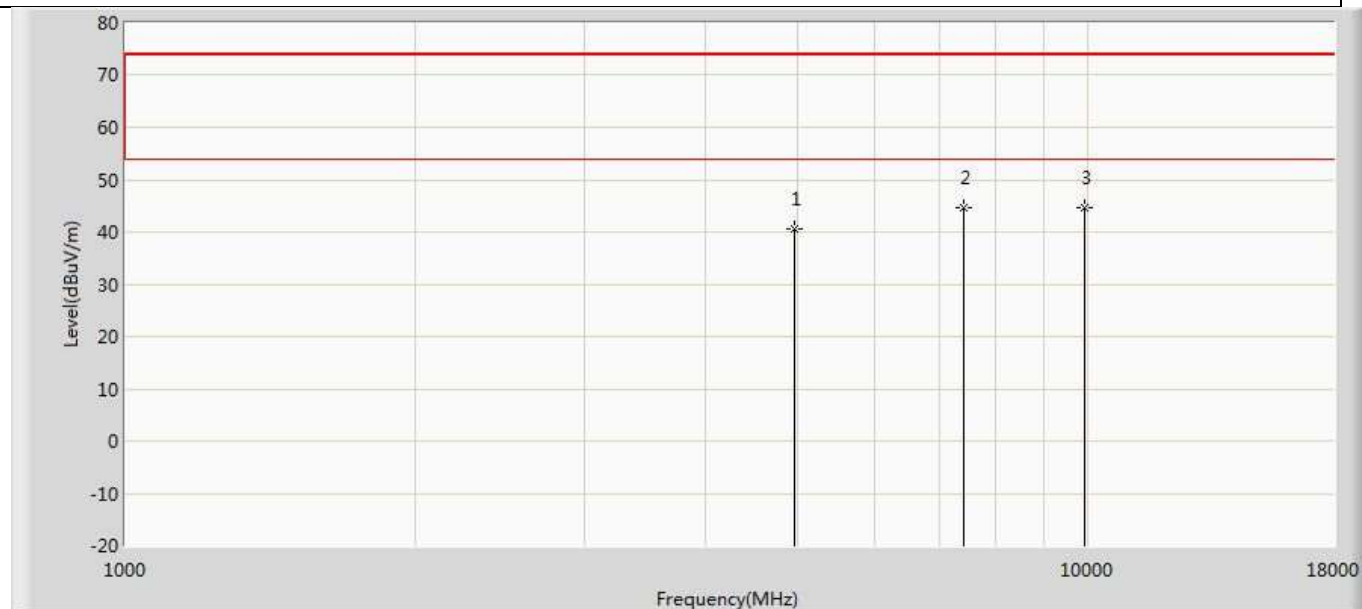

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.518	36.907	-33.482	74.000	3.611	PK
2	*	7440.000	44.725	38.140	-29.275	74.000	6.585	PK
3		9920.000	44.692	35.967	-29.308	74.000	8.725	PK

Profile: 2040811R	Page No.: 88
Engineer: YULIU	
Site: AC5	Time: 2020/05/21 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

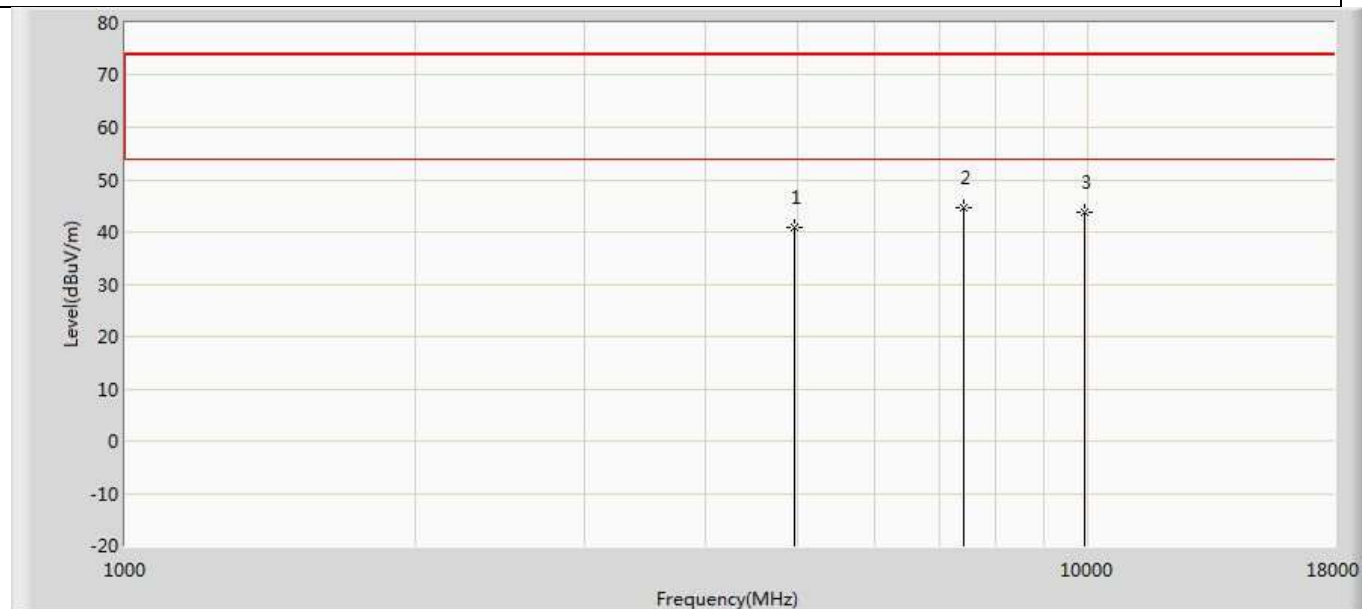

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.784	37.173	-33.216	74.000	3.611	PK
2	*	7440.000	44.609	38.024	-29.391	74.000	6.585	PK
3		9920.000	43.883	35.158	-30.117	74.000	8.725	PK

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

The worst case of Radiated Emission below 1GHz:

Engineer: YULIU	
Site: AC2	Time: 2020/05/11
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: SuZ-2141	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		36.669	23.700	1.000	-16.300	40.000	16.332	6.368	0.000	100	40	QP
2		522.760	29.813	0.400	-16.187	46.000	21.180	8.233	0.000	100	173	QP
3		617.214	31.855	0.900	-14.145	46.000	22.472	8.484	0.000	100	80	QP
4		791.208	33.787	0.600	-12.213	46.000	24.262	8.925	0.000	100	60	QP
5	*	868.565	35.906	0.600	-10.094	46.000	26.206	9.099	0.000	100	150	QP
6		951.136	35.646	1.400	-10.354	46.000	24.954	9.292	0.000	100	77	QP

Engineer: YULIU

Site: AC2

Time: 2020/05/11

Limit: FCC_Part15.209_RE(3m)_ClassB

Margin: 0


Probe: SuZ-2141

Polarity: Vertical

EUT: EZ-BT WICED Module

Power: DC 3.3V

Note: Mode 1

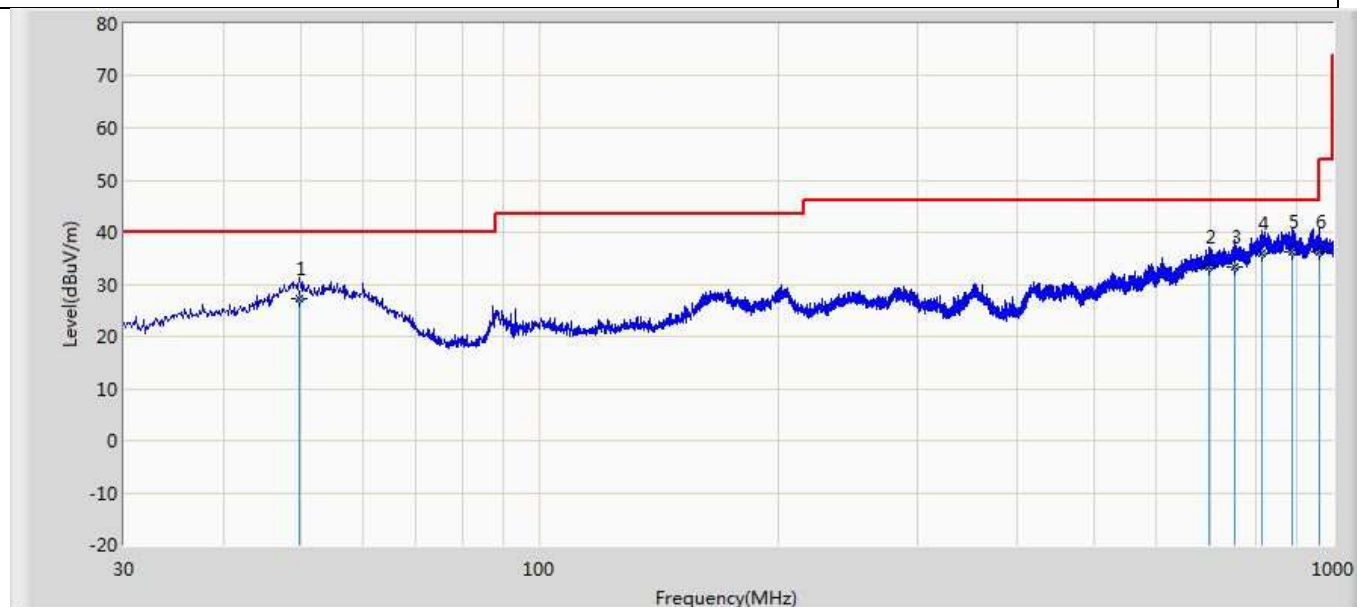

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		49.885	27.217	2.000	-12.783	40.000	18.725	6.492	0.000	100	63	QP
2		698.330	33.367	1.600	-12.633	46.000	23.073	8.694	0.000	100	120	QP
3		751.922	33.302	0.500	-12.698	46.000	23.974	8.828	0.000	100	263	QP
4		814.609	35.820	0.700	-10.180	46.000	26.141	8.980	0.000	100	140	QP
5	*	889.299	36.286	0.800	-9.714	46.000	26.340	9.146	0.000	100	20	QP
6		962.170	36.272	1.100	-17.728	54.000	25.854	9.318	0.000	100	114	QP


Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.3 20dB Bandwidth**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(a)
☒	For frequency hopping systems operating in 2400-2483.5 MHz band, within frequency range.
☐	For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
☐	For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

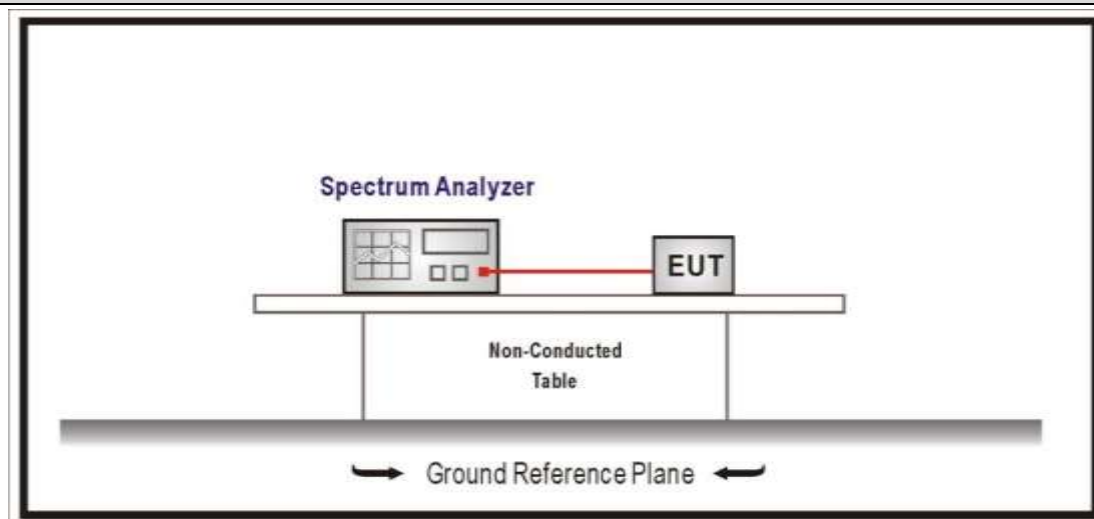
4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	6.9	Occupied bandwidth tests
☒ ANSI C63.10	6.9.2	Occupied bandwidth—relative measurement procedure


4.3.4 Test Data

Mode	Channel	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
1	00	2402	950.8	952.43
	39	2441	1024.0	977.75
	79	2480	973.1	960.68
2	00	2402	1404.0	1273.90
	39	2441	1414.0	1283.40
	79	2480	1392.0	1241.70
3	00	2402	1388.0	1260.30
	39	2441	1397.0	1285.90
	79	2480	1374.0	1236.40


Mode 1 CH00(2402MHz)

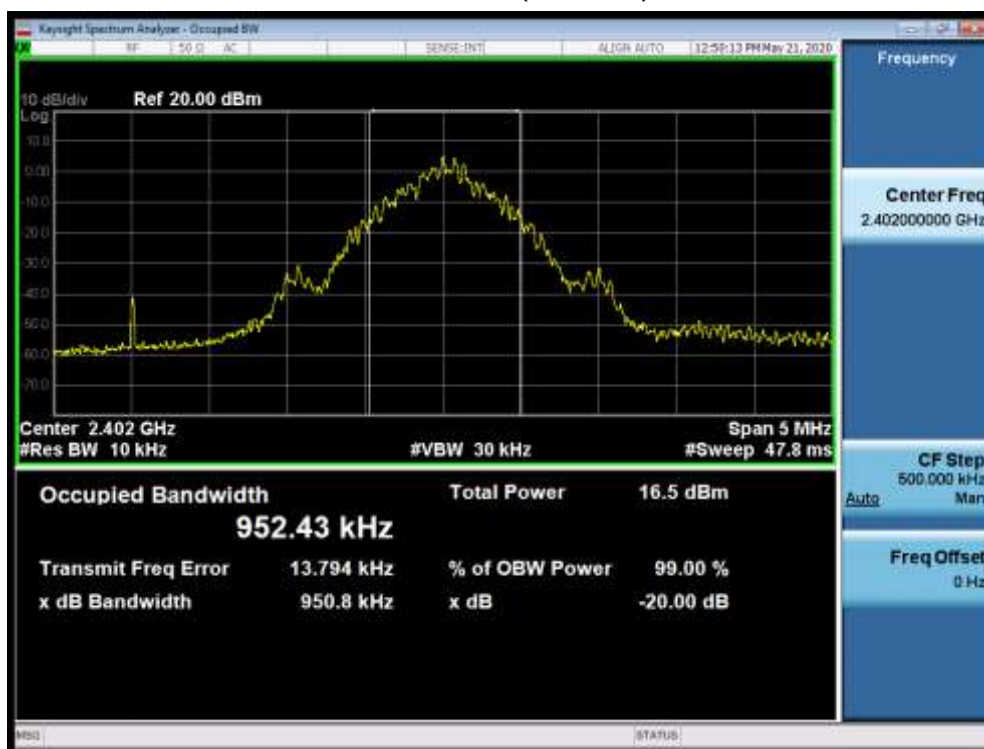

Mode 1 CH39(2441MHz)

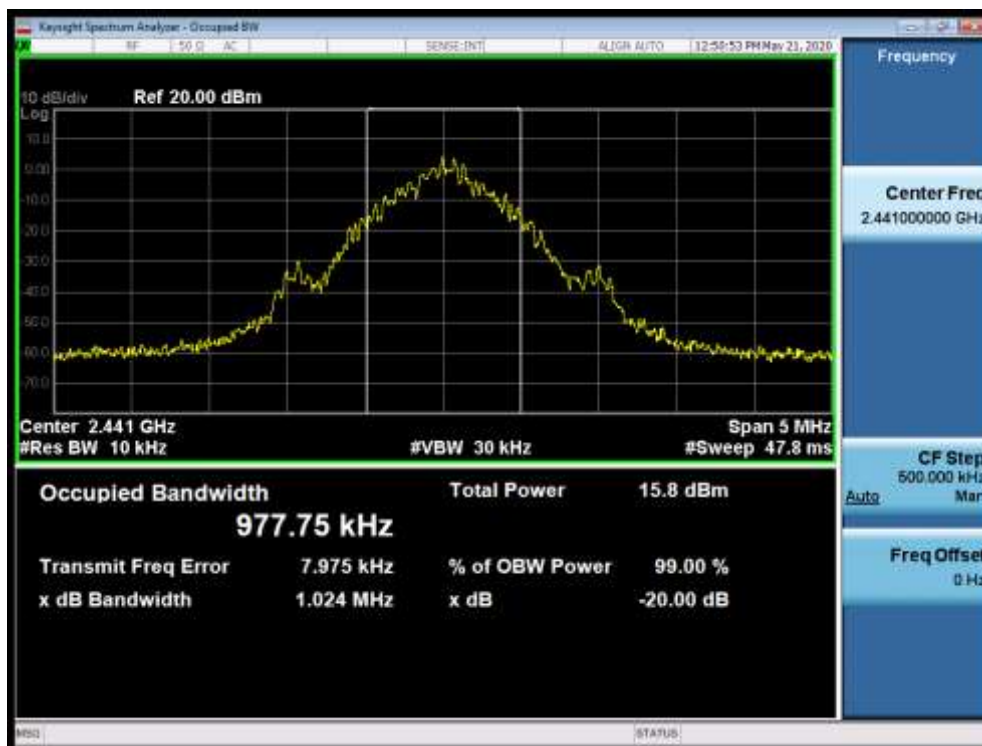


Mode 1 CH78(2480MHz)

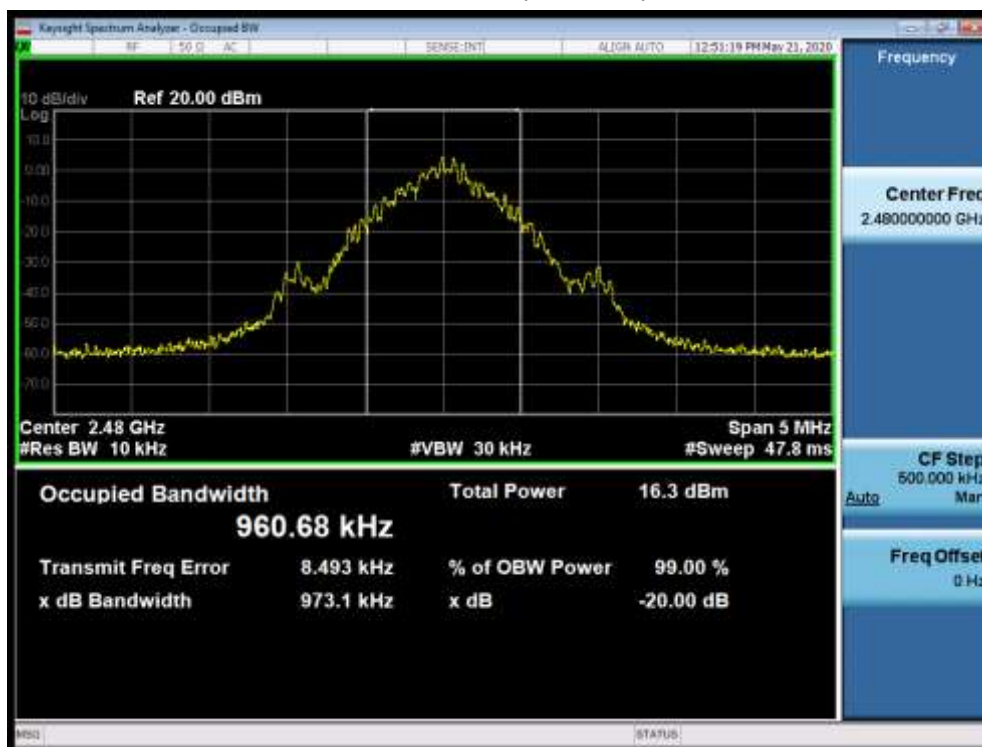


Mode 2 CH00(2402MHz)




Mode 2 CH39(2441MHz)

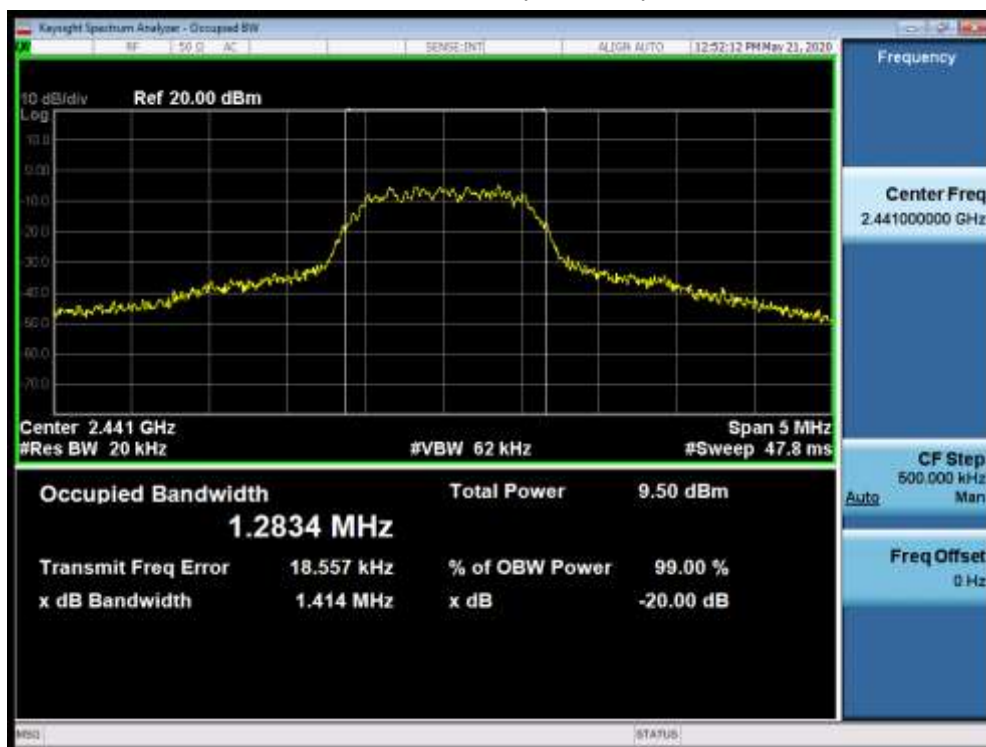

Mode 2 CH78(2480MHz)

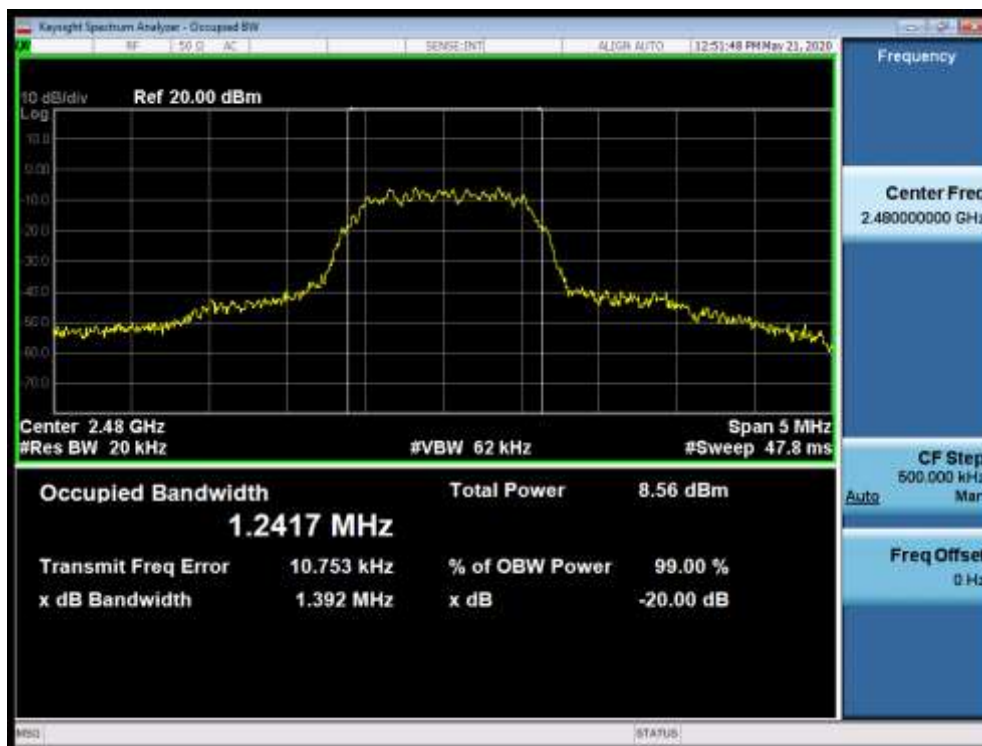


Mode 3 CH00(2402MHz)

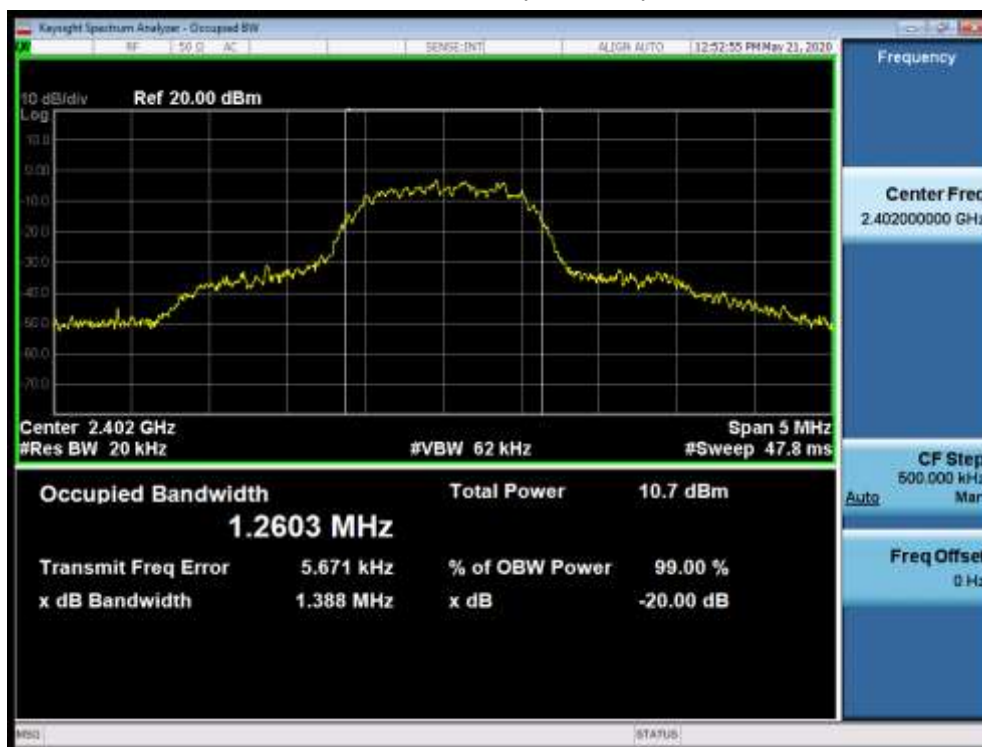

Mode 3 CH39(2441MHz)



Mode 3 CH78(2480MHz)

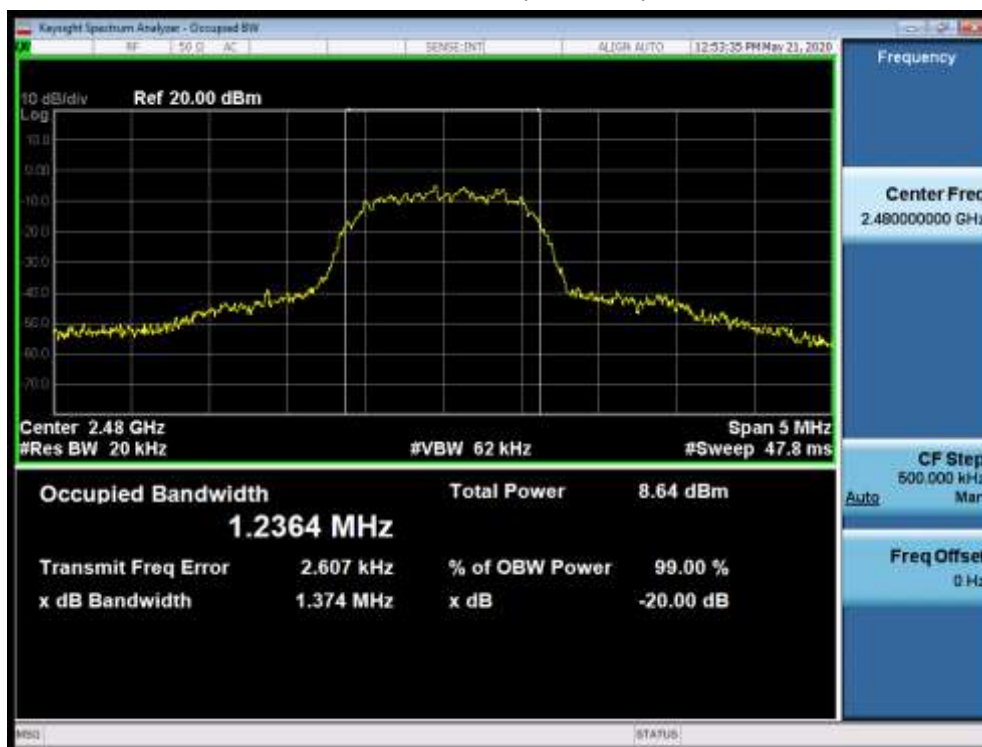


4.4 Carrier Frequency Separation

VERDICT: PASS

4.4.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(a)
☐	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
☒	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.
☐	The 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4
☐	The 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz.

4.4.2 Test Setup

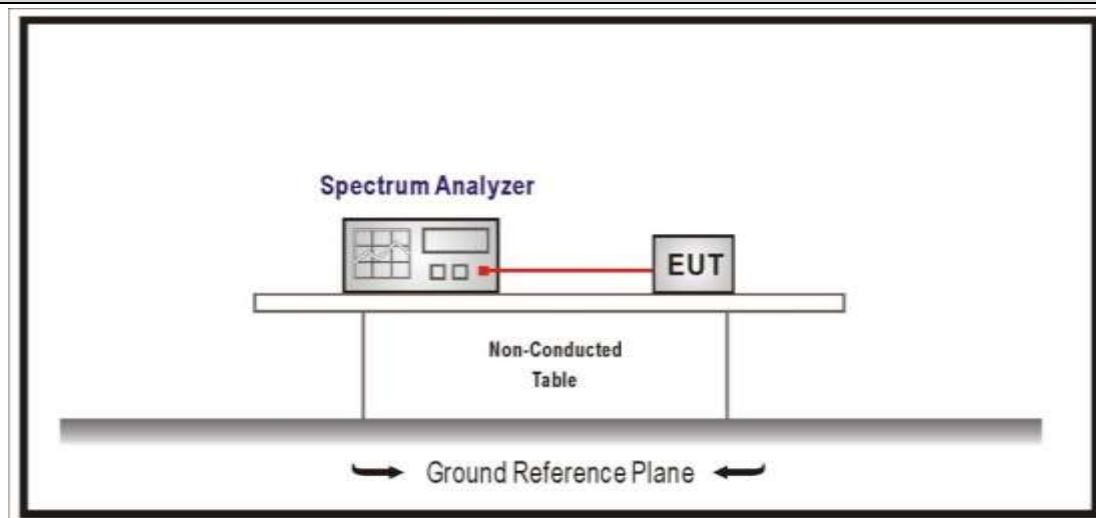


4.4.3 Test Procedure

References Rule	Chapter	Description
☒ ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.2	Carrier frequency separation


4.4.4 Test Data

Mode	Channel	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
1	00	2402	1000	633.87	Pass
	39	2441	1000	682.67	Pass
	78	2480	1000	648.73	Pass
2	00	2402	1000	936.00	Pass
	39	2441	1000	942.67	Pass
	78	2480	1000	928.00	Pass
3	00	2402	1000	925.33	Pass
	39	2441	1000	931.33	Pass
	78	2480	1000	916.00	Pass


Mode 1 CH00(2402MHz)

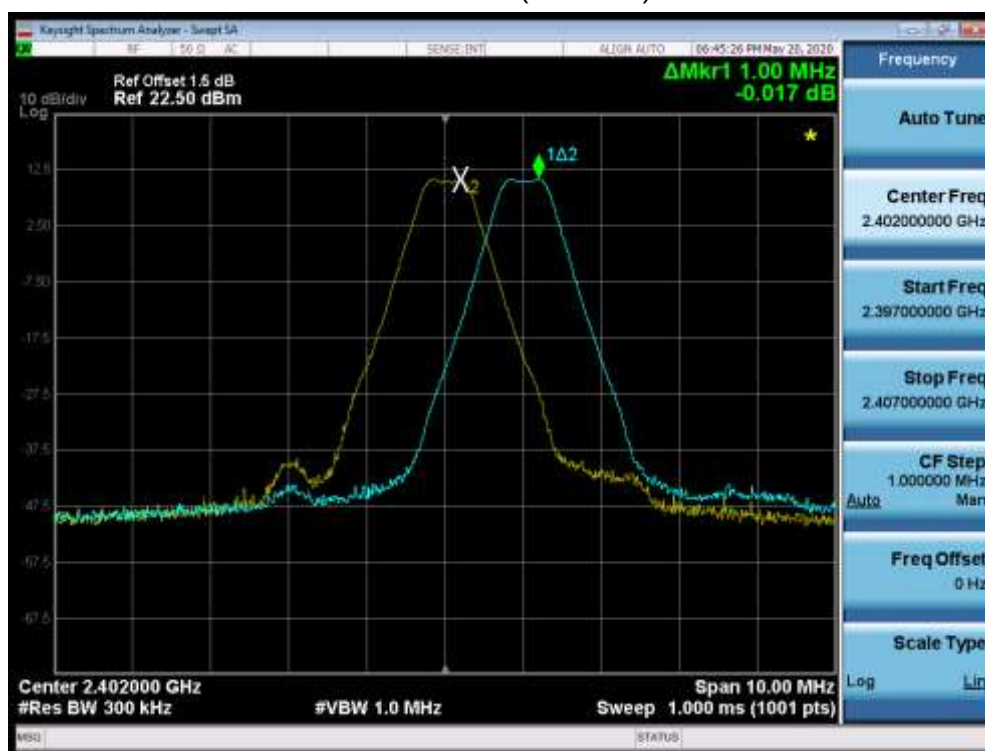


Mode 1 CH39(2441MHz)

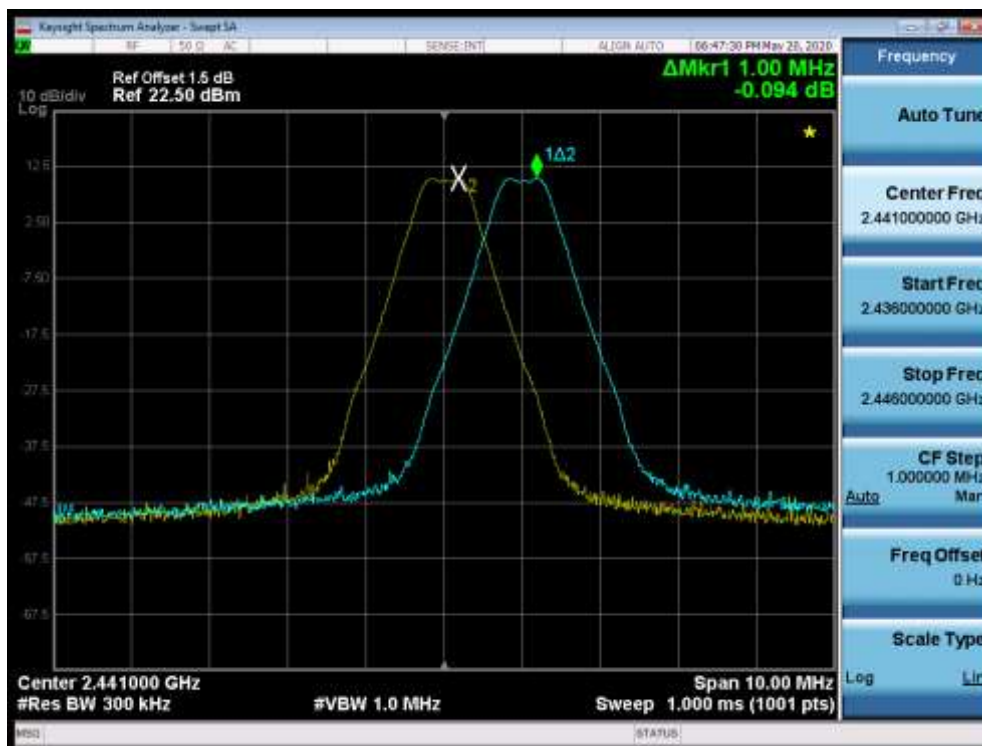


Mode 1 CH78(2480MHz)

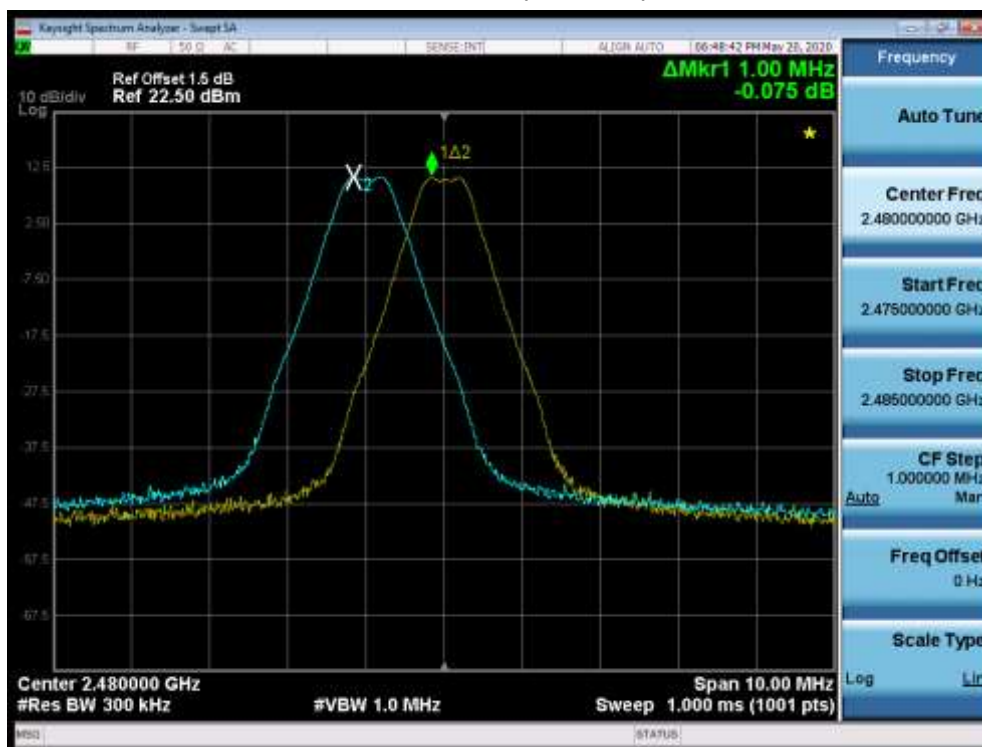


Mode 2 CH00(2402MHz)

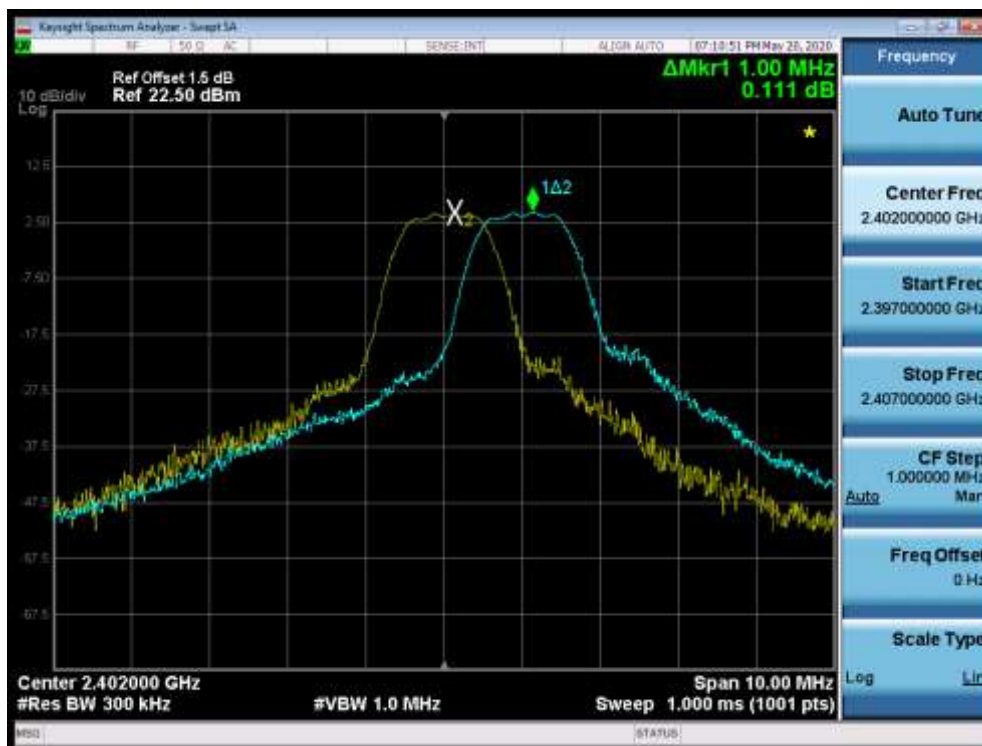


Mode 2 CH39(2441MHz)

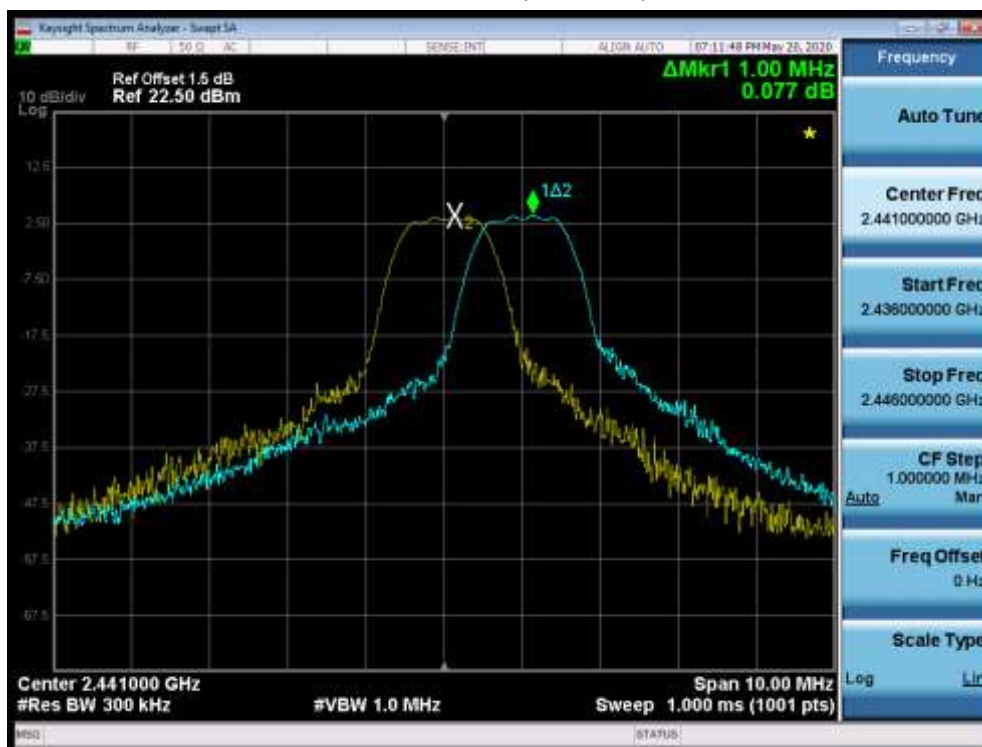


Mode 2 CH78(2480MHz)

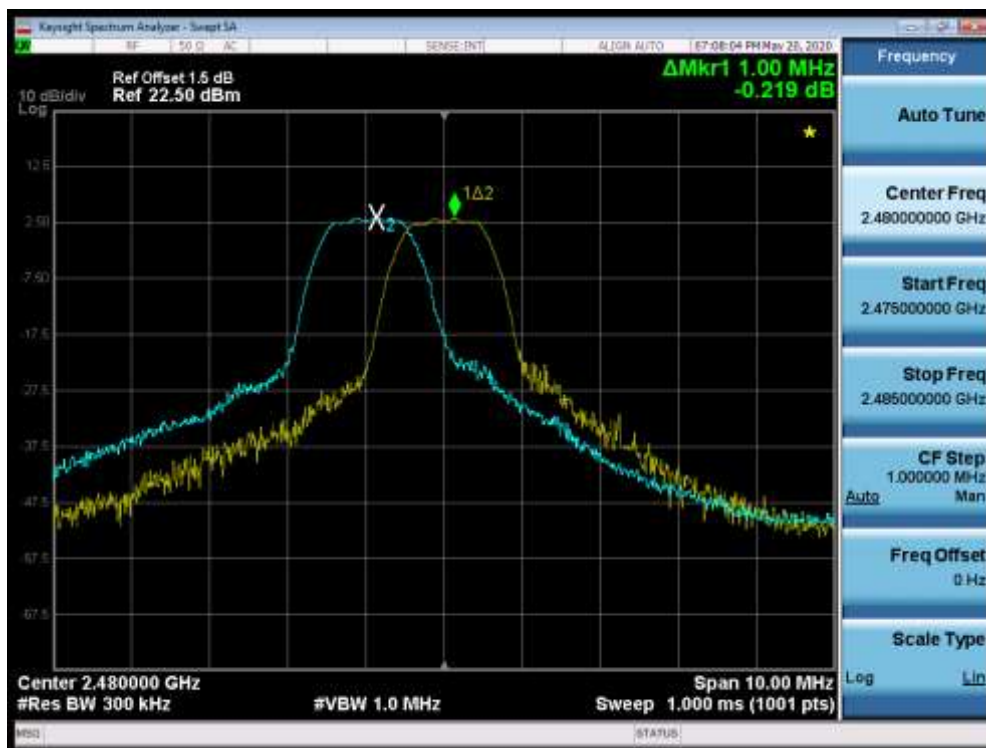


Mode 3 CH00(2402MHz)

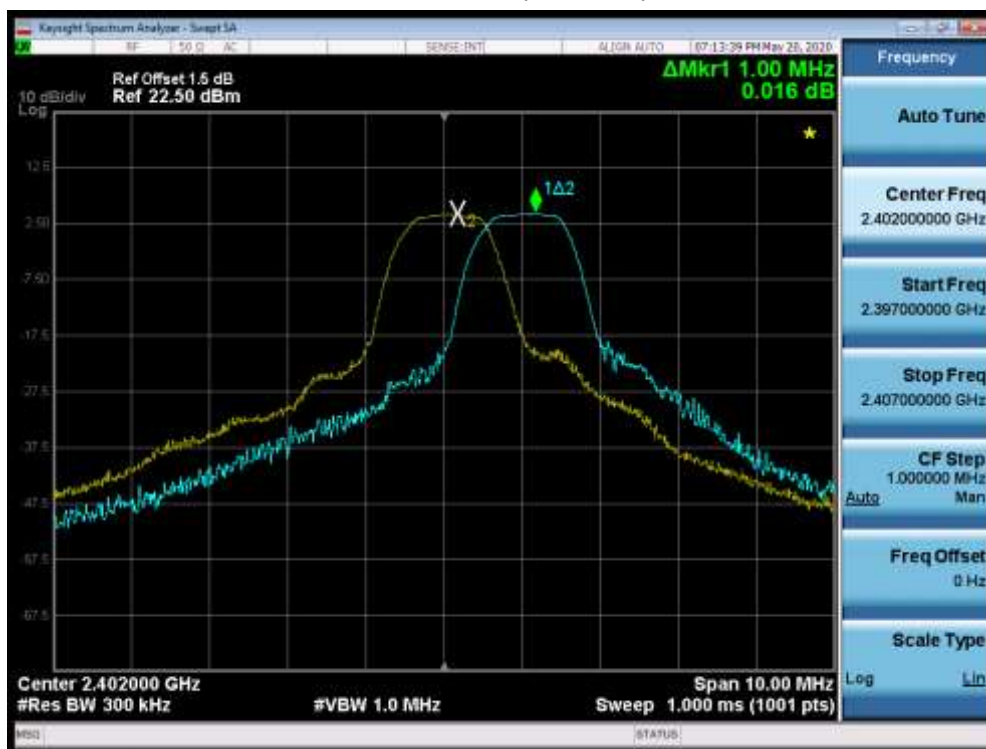

Mode 3 CH39(2441MHz)

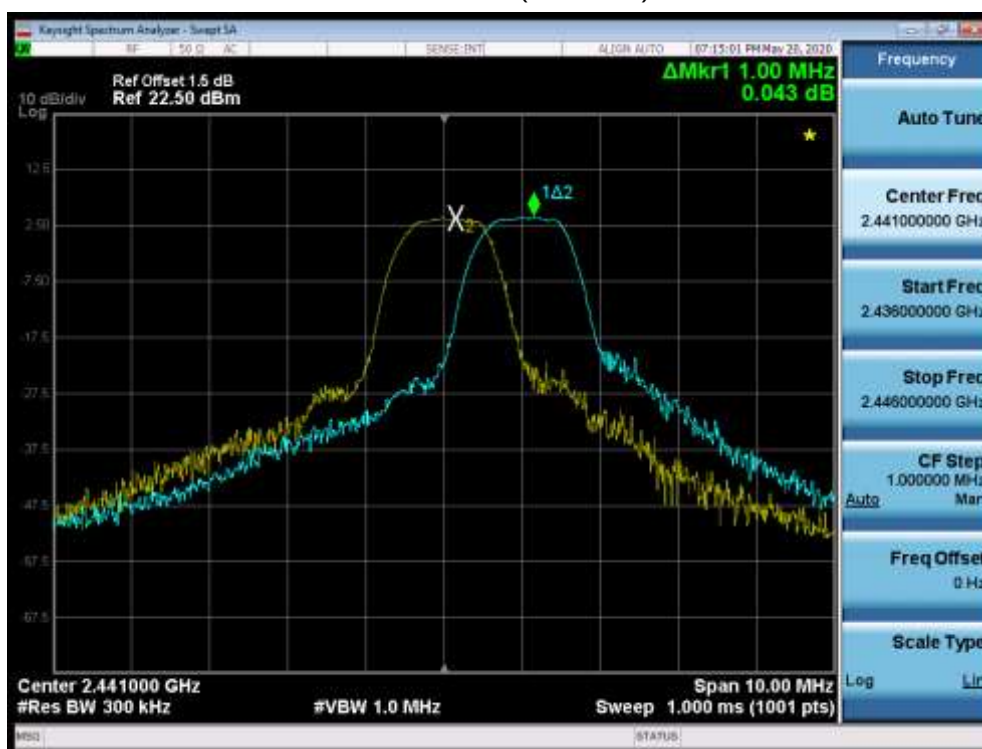

Mode 3 CH78(2480MHz)

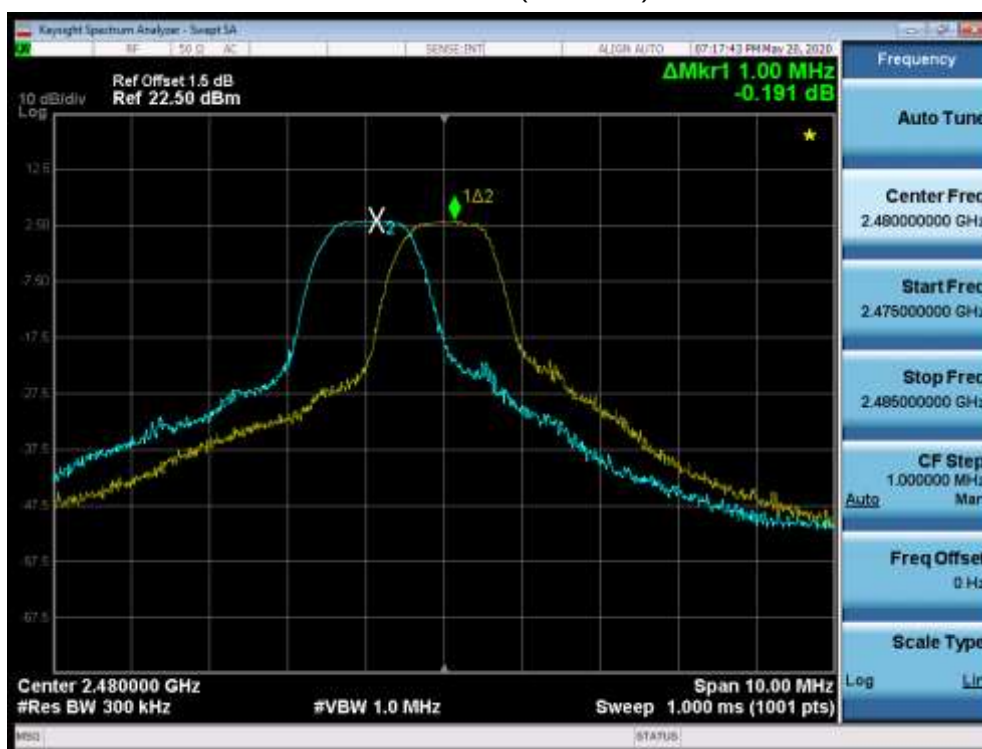


4.5 Number of hopping Frequencies

VERDICT: PASS

4.5.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(a)
☒	For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
☐	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is less than 250 kHz, shall use at least 50 hopping frequencies.
☐	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is higher than 250 kHz, shall use at least 25 hopping frequencies.
☐	For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

4.5.2 Test Setup

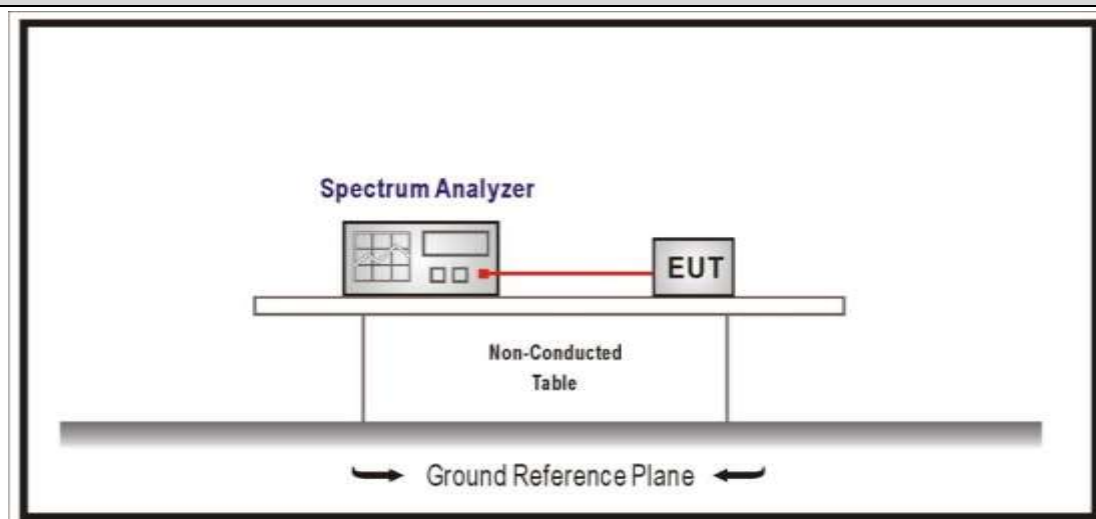


4.5.3 Test Procedure

References Rule	Chapter	Description
☒ ANSI C63.10	7.8.	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.3	Number of Hopping Frequencies


4.5.4 Test Data

Mode	Number of Hopping Frequencies	Limit	Result
1	79	>15	Pass
2	79	>15	Pass
3	79	>15	Pass


Mode 1

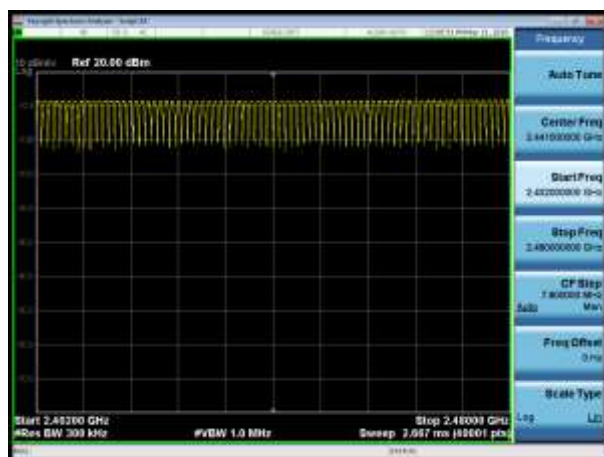

Mode 2

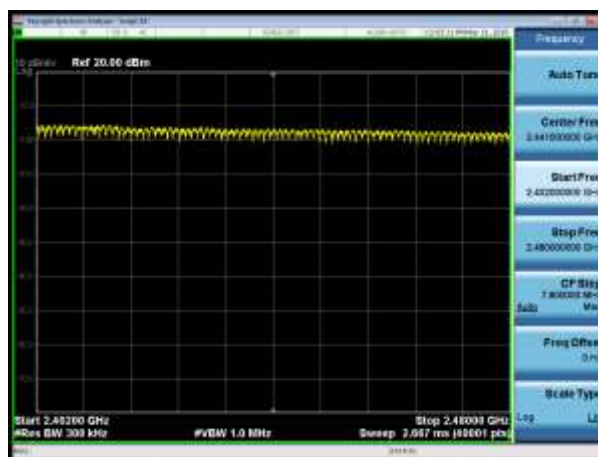


Mode 3

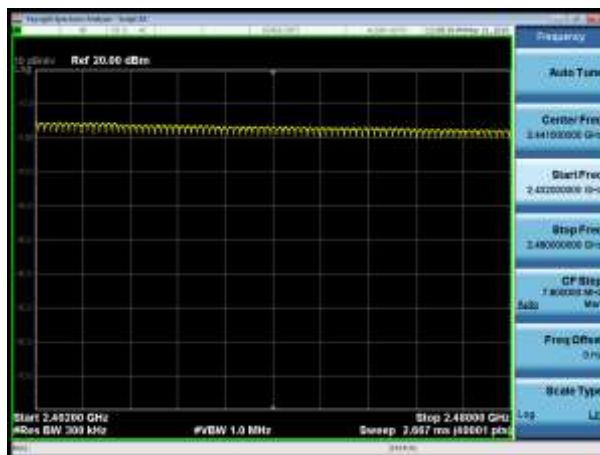

4.6 Time of Occupancy(Dwell Time)**VERDICT: PASS****4.6.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(a)
☒	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

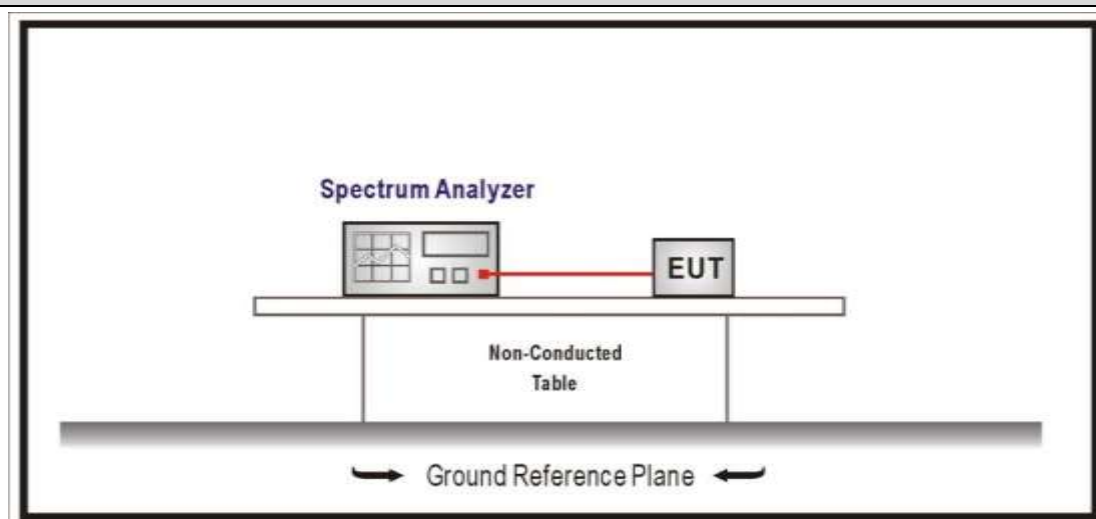4.6.2 Test Setup**4.6.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.4	Time of occupancy (dwell time)

4.6.4 Test Data


Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
1	39	2441	133.44	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy = $0.417 \times 32 \times 31.6 / 3.16 = 133.44 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441MHz) - (DH1)

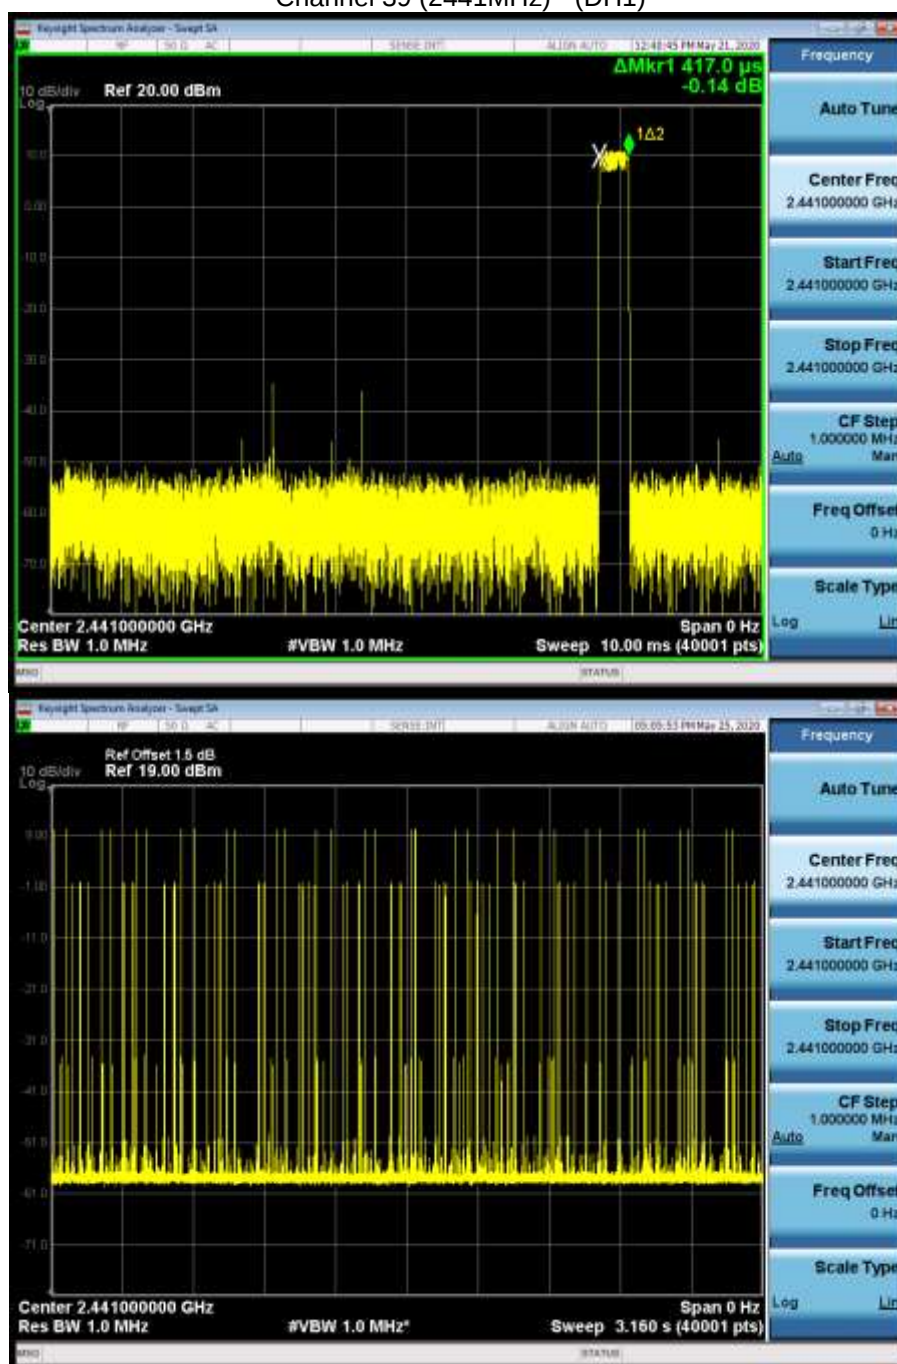


Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
1	39	2441	316.35	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy = $1.665 \times 19 \times 31.6 / 3.16 = 316.35 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441MHz) - (DH3)

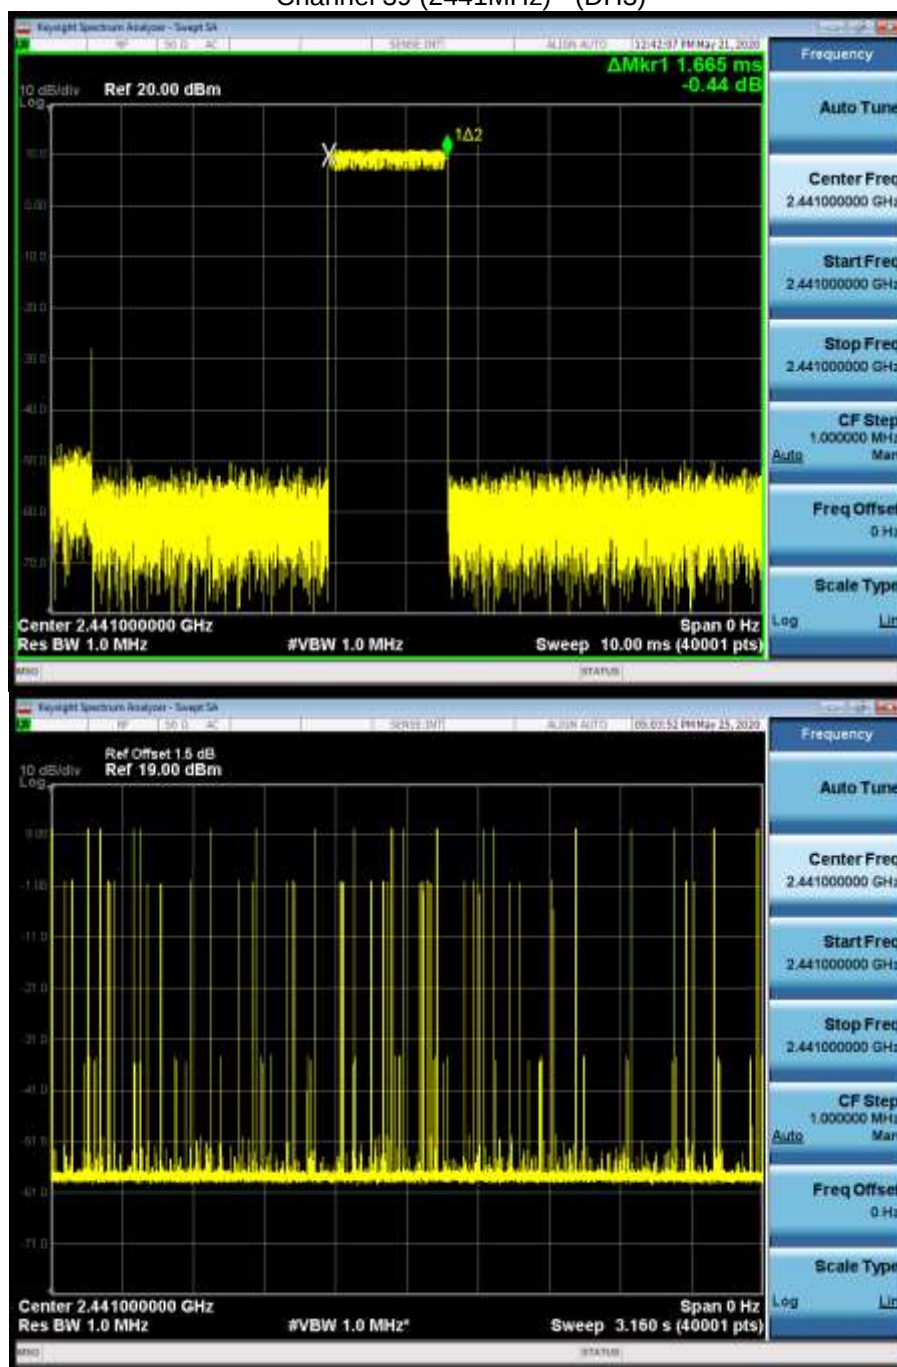


Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
1	39	2441	319.44	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy = $2.904 \times 11 \times 31.6 / 3.16 = 319.44 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.


Channel 39 (2441MHz) - (DH5)

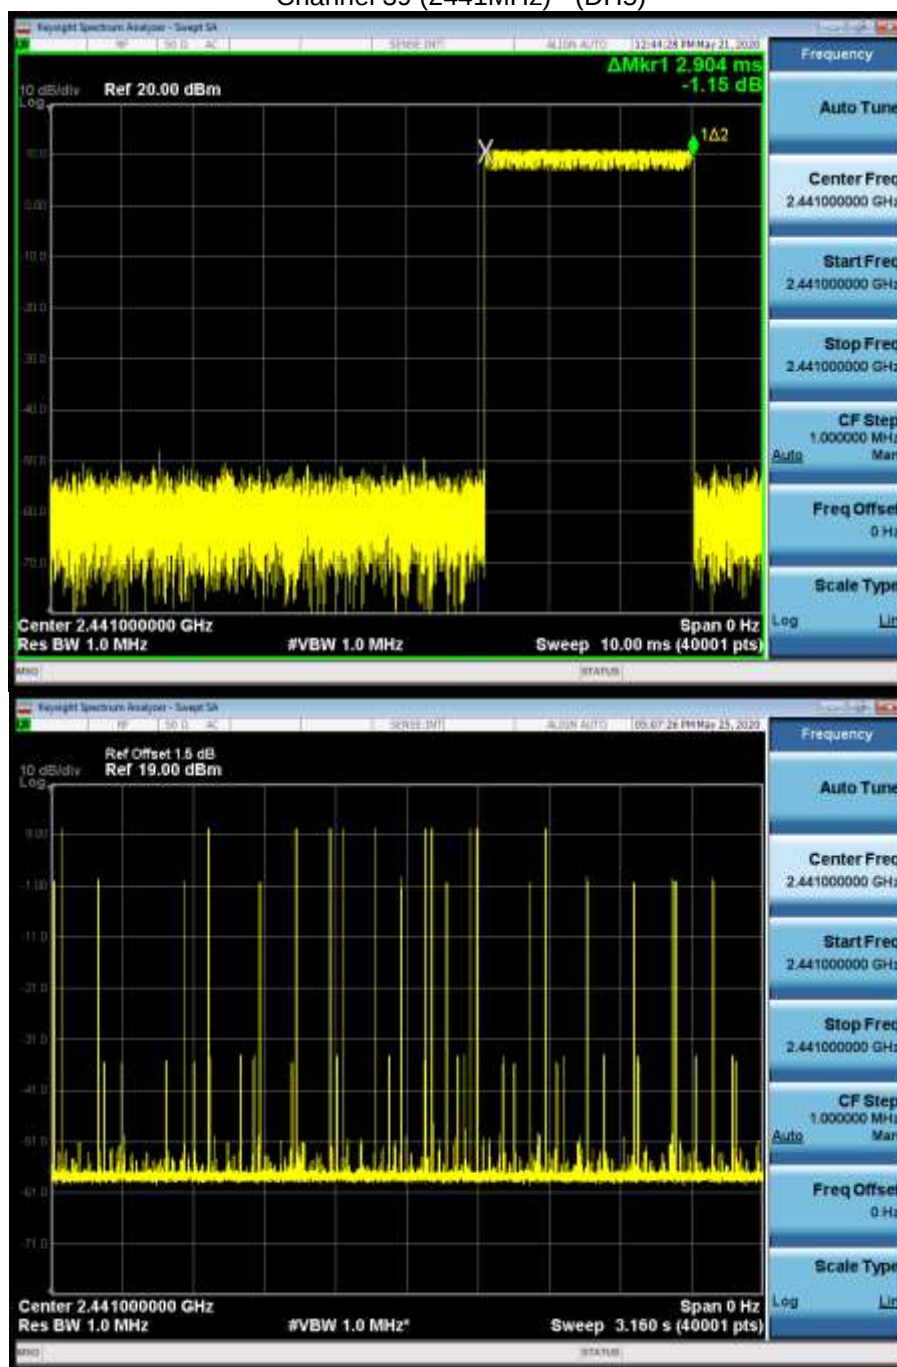

Note: The packet time of AFH mode is same as normal mode, due to the packet time of AFH mode multiply with lesser factor is dwell time of $0.4 \times 20 = 8 \text{ S}$, the dwell time of AFH mode comply with the limit.

4.7 Peak Output Power**VERDICT: PASS****4.7.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(1)
☐	Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
☒	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
☐	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels

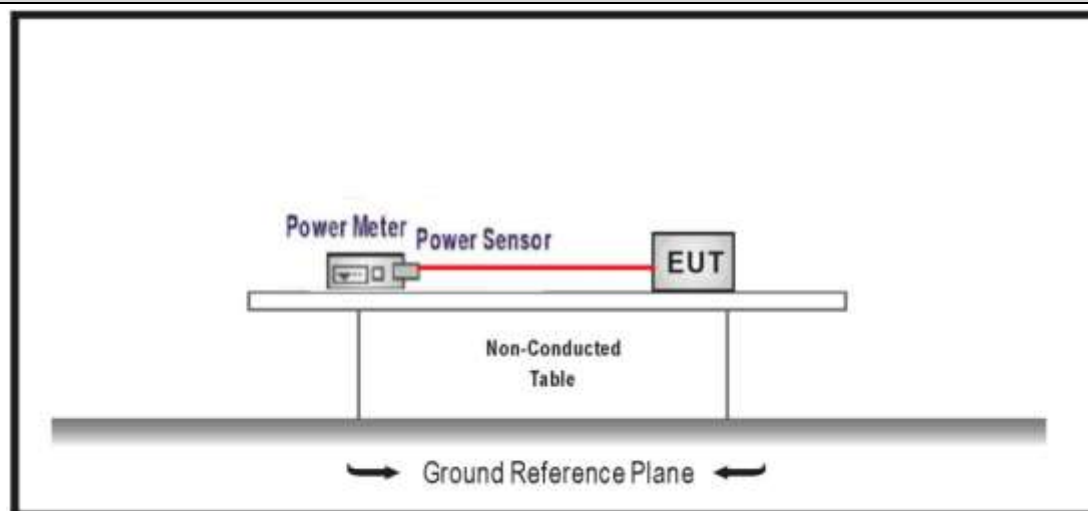4.7.2 Test Setup

4.7.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		7.8	Evaluation of frequency-hopping device parameters
	☒	ANSI C63.10	7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

4.7.4 Test Data


Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
Mode 1	00	2402	10.04	≤ 21	Pass
	39	2442	10.02	≤ 21	Pass
	78	2480	10.03	≤ 21	Pass
Mode 2	00	2402	4.52	≤ 21	Pass
	39	2442	4.56	≤ 21	Pass
	78	2480	4.47	≤ 21	Pass
Mode 3	00	2402	4.50	≤ 21	Pass
	39	2442	4.48	≤ 21	Pass
	78	2480	4.44	≤ 21	Pass

4.8 Emissions in non-restricted frequency band**VERDICT: PASS****4.8.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

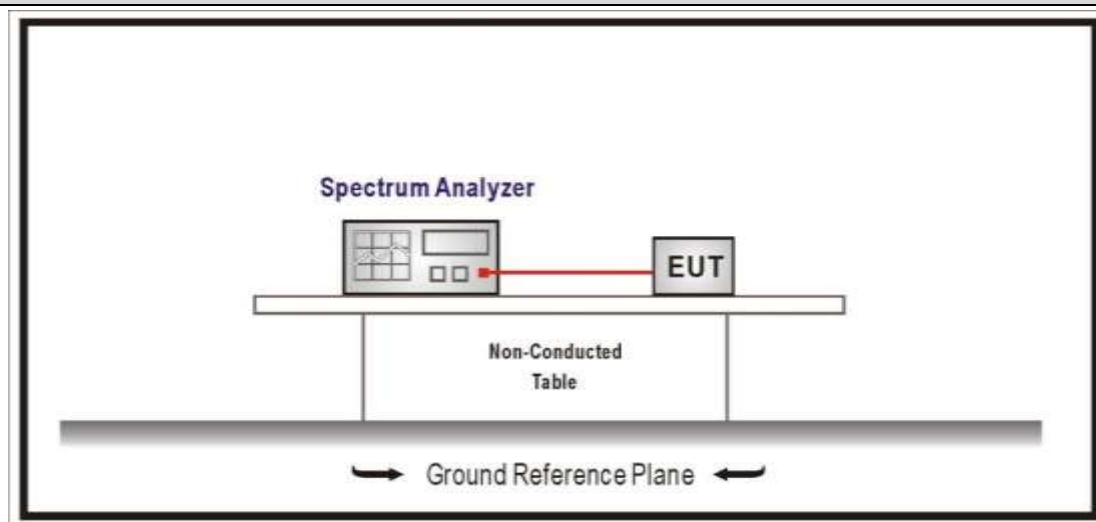4.8.2 Test Setup**4.8.3 Test Procedure**


References Rule	Chapter	Description
☒ ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.6	Band-edge measurements for RF conducted emissions

4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	10.561	2400	-40.735	51.296	>20	Pass
	78	2480	10.305	2503.864	-54.317	64.622	>20	Pass
2	00	2402	2.716	2400	-37.880	40.596	>20	Pass
	78	2480	2.165	2500	-55.539	57.704	>20	Pass
3	00	2402	2.837	2400	-36.582	39.419	>20	Pass
	78	2480	2.043	2503.986	-55.789	57.832	>20	Pass


Note: The worst data as shown in below:

Mode 3 CH00(2402MHz)

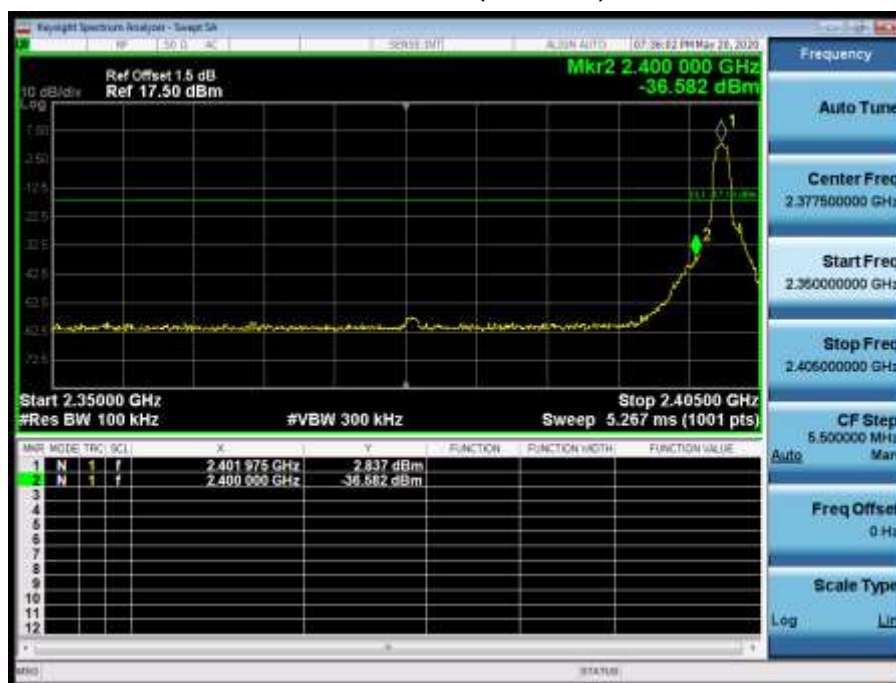

4.9 Duty cycle**VERDICT: PASS****4.9.1 Limit**

N/A

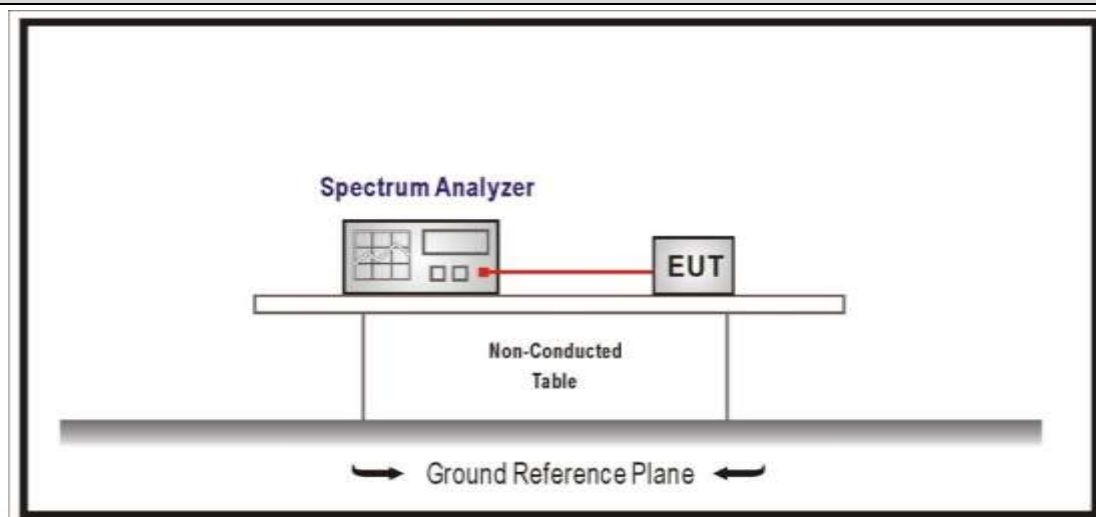4.9.2 Test Setup**4.9.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.9.4 Test Data

Test Mode	Tx On (ms)	Tx Off (ms)	VBW	Tx On + Tx Off (ms)	Duty Cycle
Mode 1	N/A	N/A	10	N/A	100%
Mode 2	N/A	N/A	10	N/A	100%
Mode 3	N/A	N/A	10	N/A	100%


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.


Mode 1 CH39 2441MHz

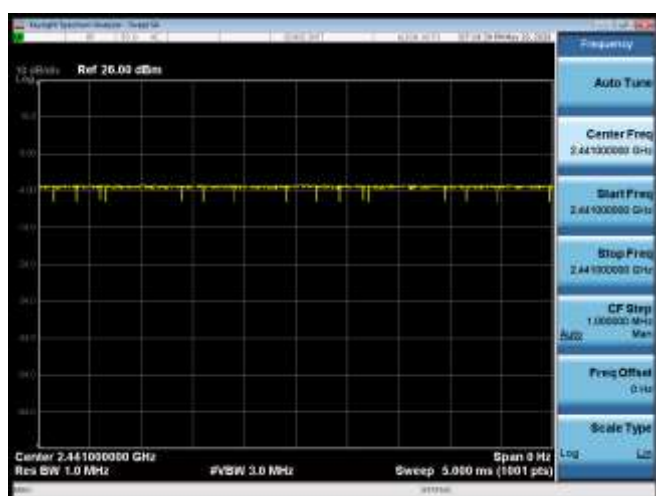

Mode 2 CH39 2441MHz

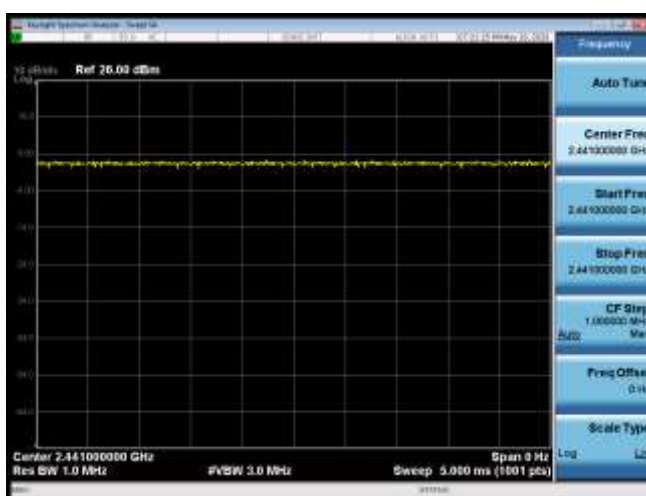

Mode 3 CH39 2441MHz

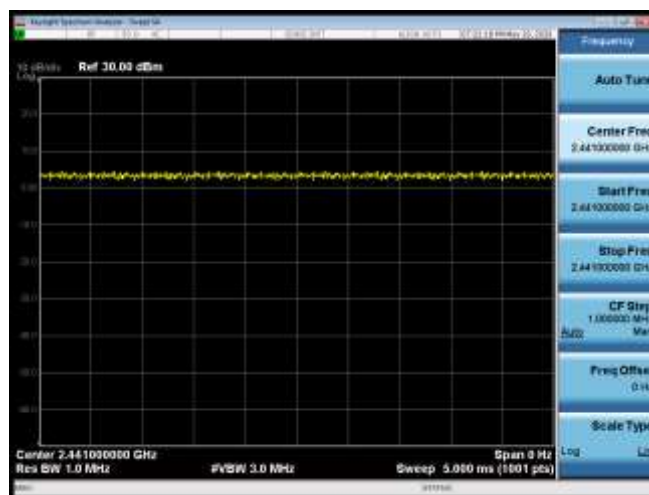


4.10 Radiated Emission Band Edge**VERDICT: PASS****4.10.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.10.2 Test Setup

Above 1GHz Test Setup:

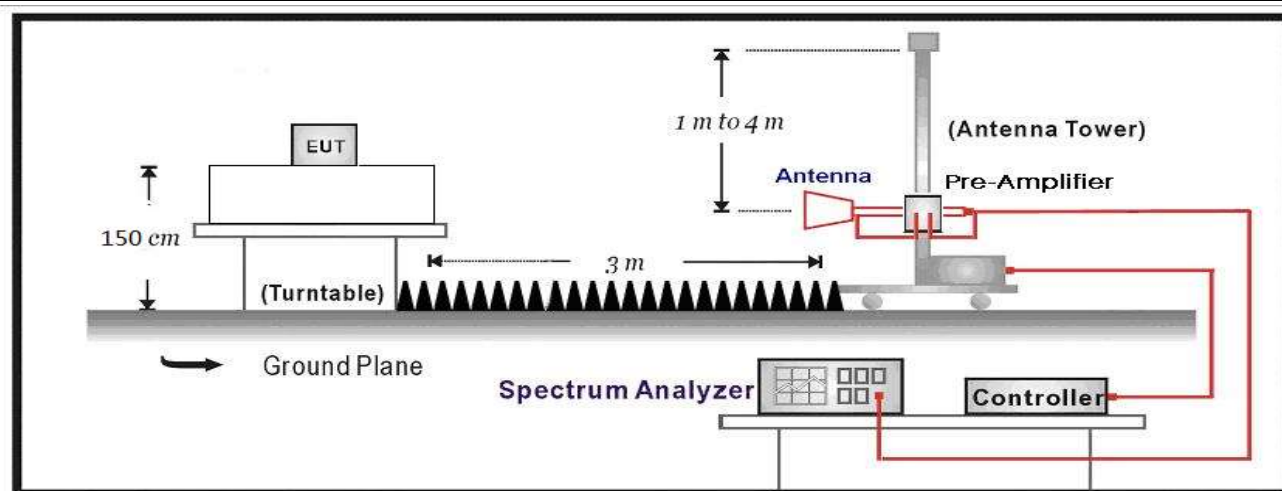
**4.10.3 Test Procedure**

Test Method

	References Rule	Chapter	Description
☐	DA 00-705	N/A	duty cycle correction factor
☒	ANSI C63.10	6.10	Band-edge testing
☒	ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	ANSI C63.10	6.10.6	Marker-delta method
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.10.4 Test Data

Profile: 2040811R	Page No.: 1
Engineer: YULIU	
Site: AC5	Time: 2020/03/12 - 00:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by DH5	

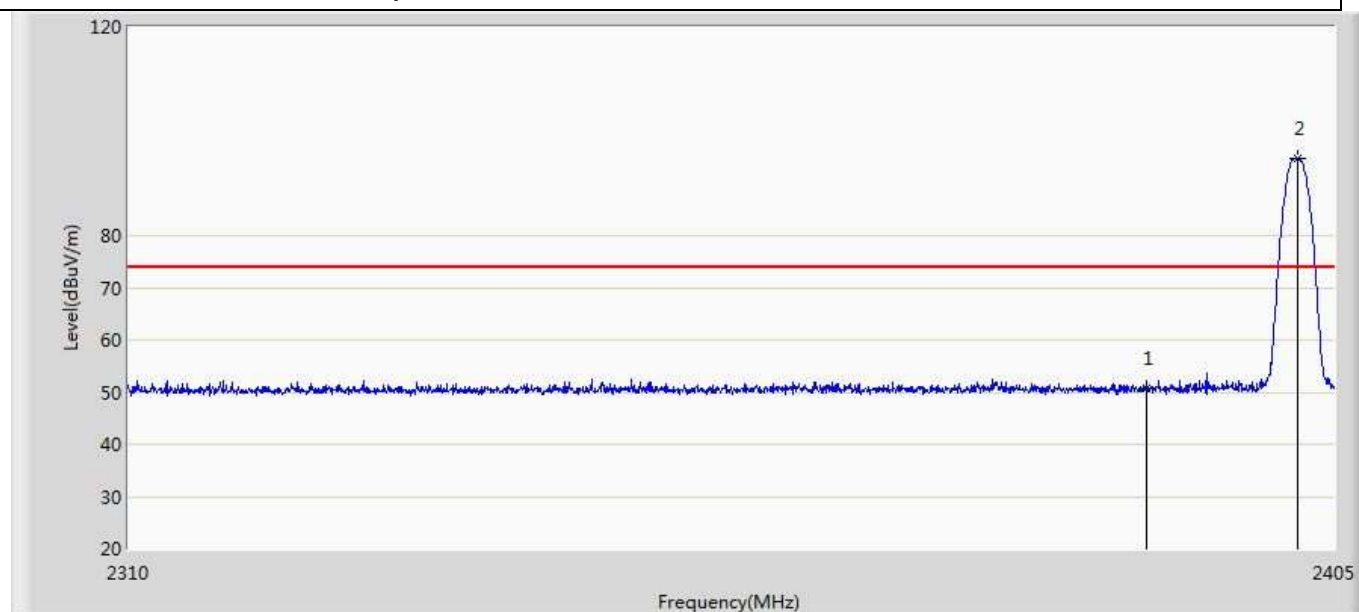


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.720	15.405	-23.280	74.000	35.315	PK
2	*	2402.055	94.768	59.456	N/A	N/A	35.312	PK

Profile: 2040811R	Page No.: 2
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by DH5	

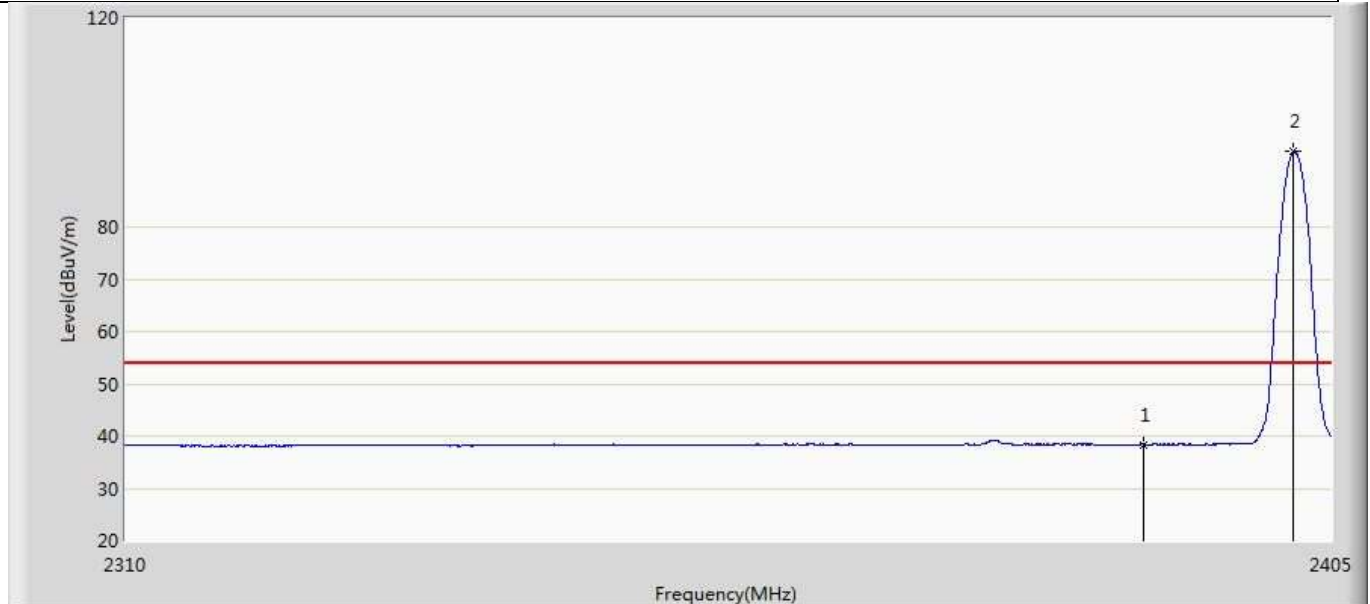


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.396	3.081	-15.604	54.000	35.315	AV
2	*	2402.008	94.409	59.097	N/A	N/A	35.312	AV

Profile: 2040811R	Page No.: 3
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by DH5	

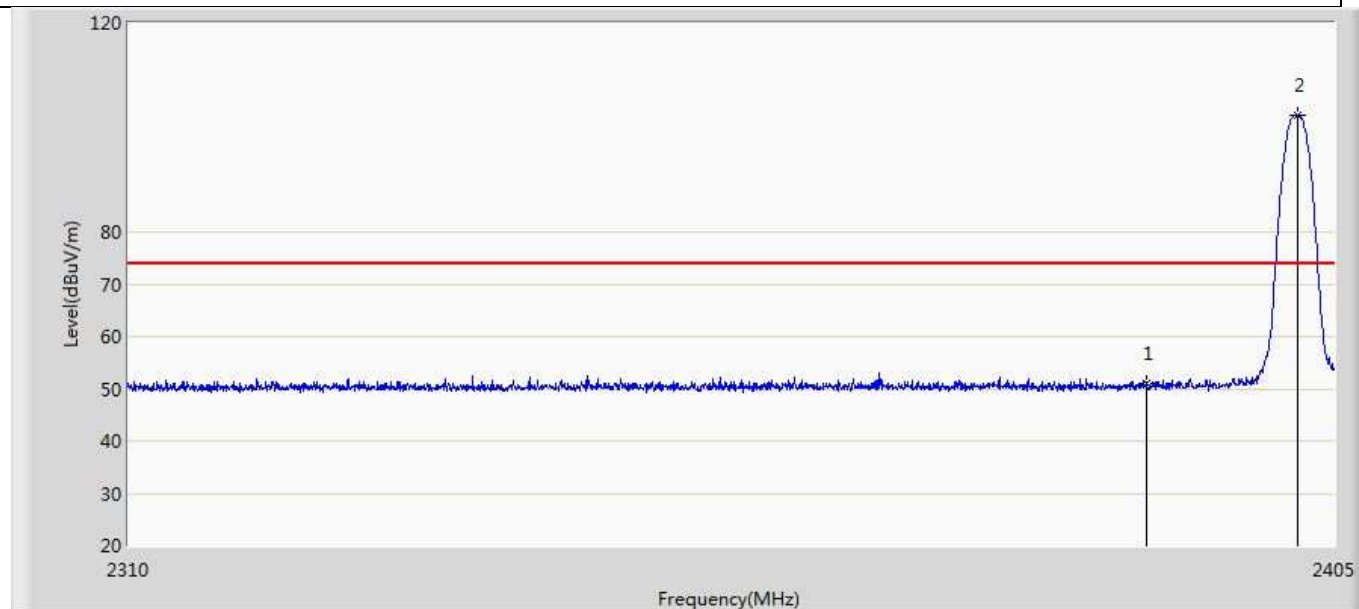


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.141	15.826	-22.859	74.000	35.315	PK
2	*	2402.055	102.254	66.942	N/A	N/A	35.312	PK

Profile: 2040811R	Page No.: 4
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by DH5	

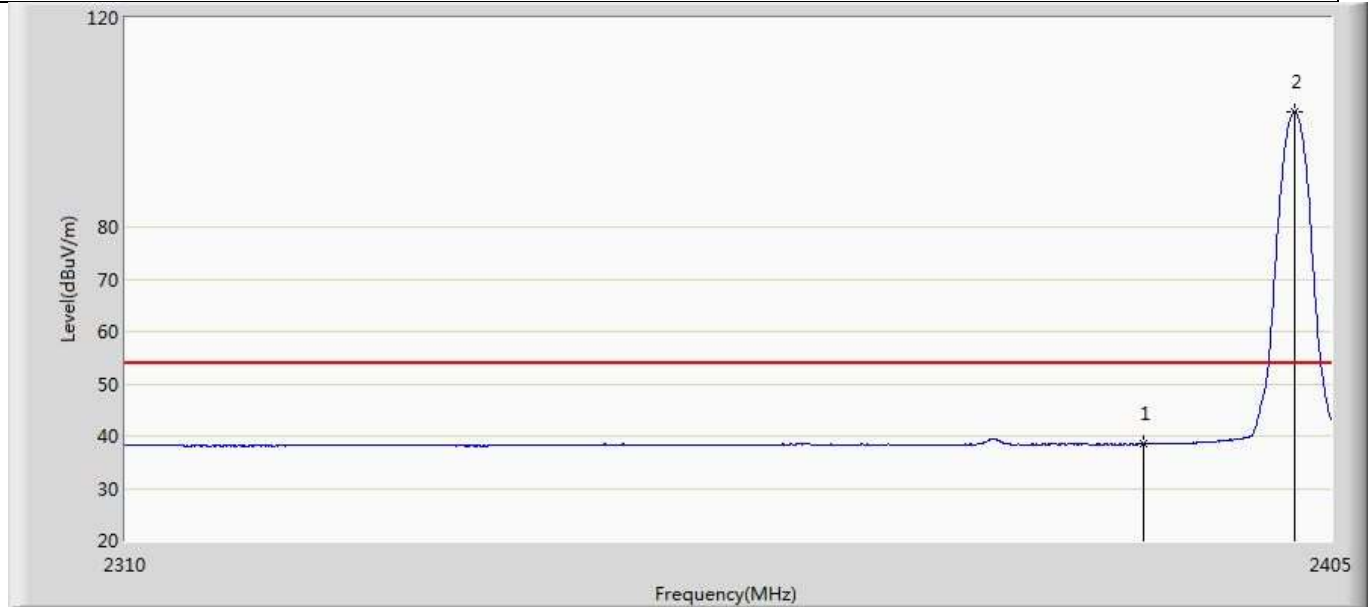


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.497	3.182	-15.503	54.000	35.315	AV
2	*	2402.055	101.992	66.680	N/A	N/A	35.312	AV

Profile: 2040811R	Page No.: 5
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by DH5	

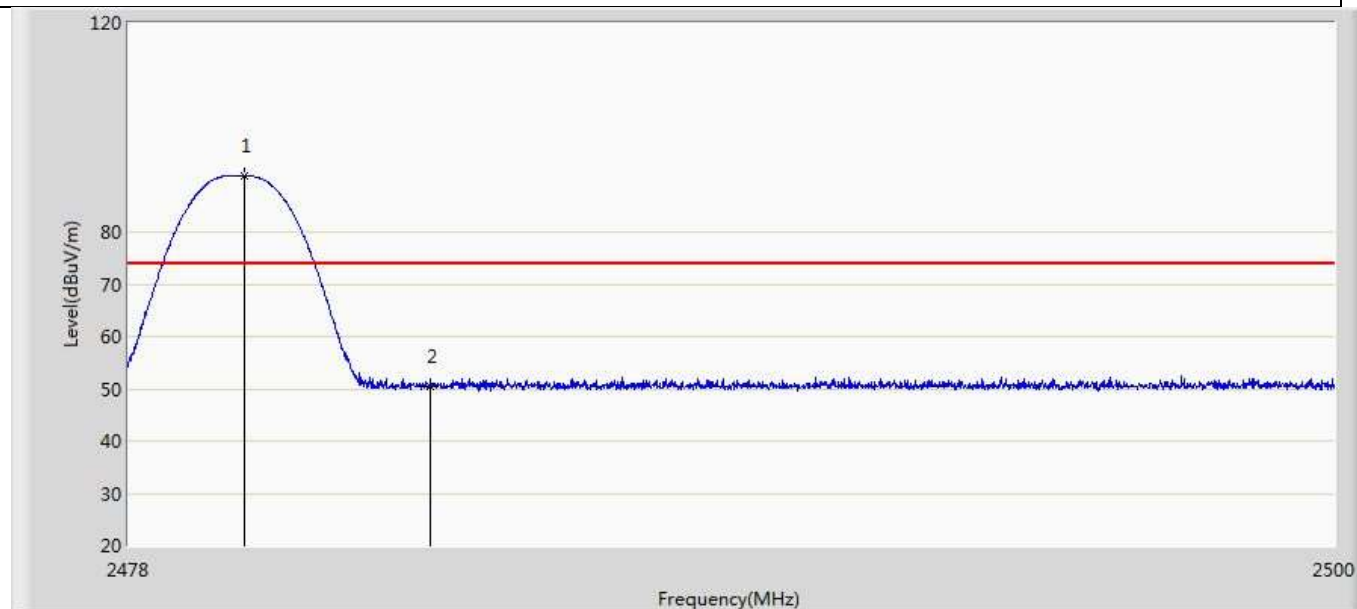


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.123	90.668	55.369	N/A	N/A	35.299	PK
2		2483.500	50.491	15.193	-23.509	74.000	35.297	PK

Profile: 2040811R	Page No.: 6
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by DH5	

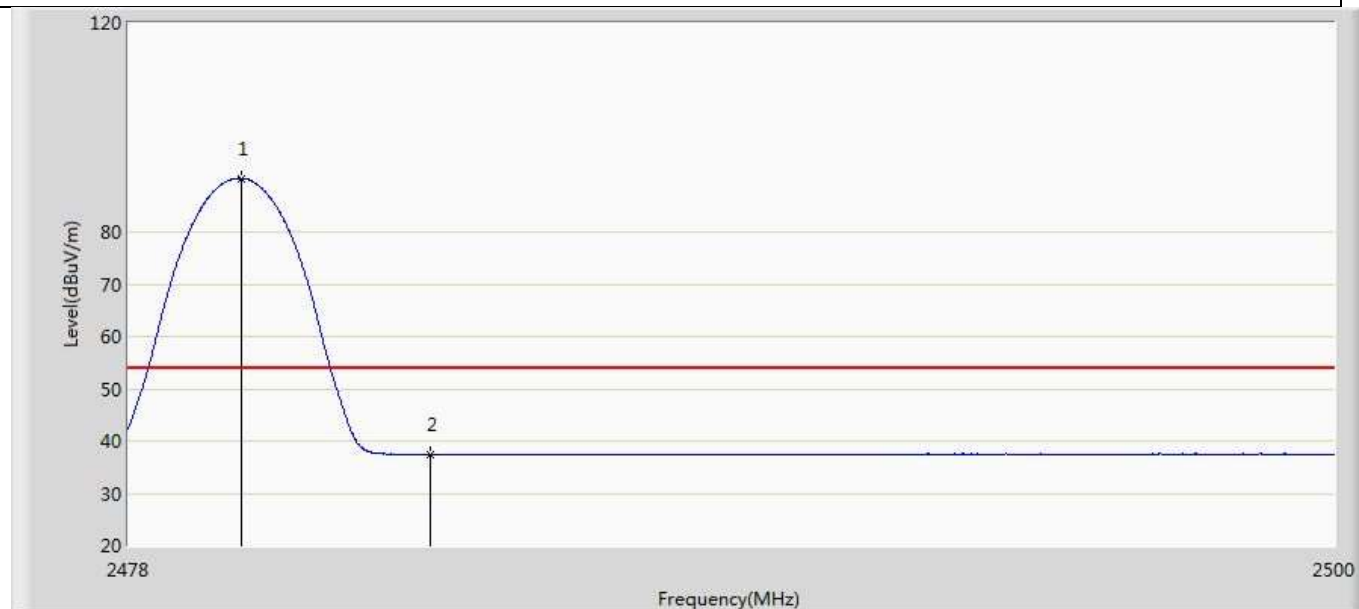


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	90.287	54.988	N/A	N/A	35.299	AV
2		2483.500	37.453	2.155	-16.547	54.000	35.297	AV

Profile: 2040811R	Page No.: 7
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by DH5	

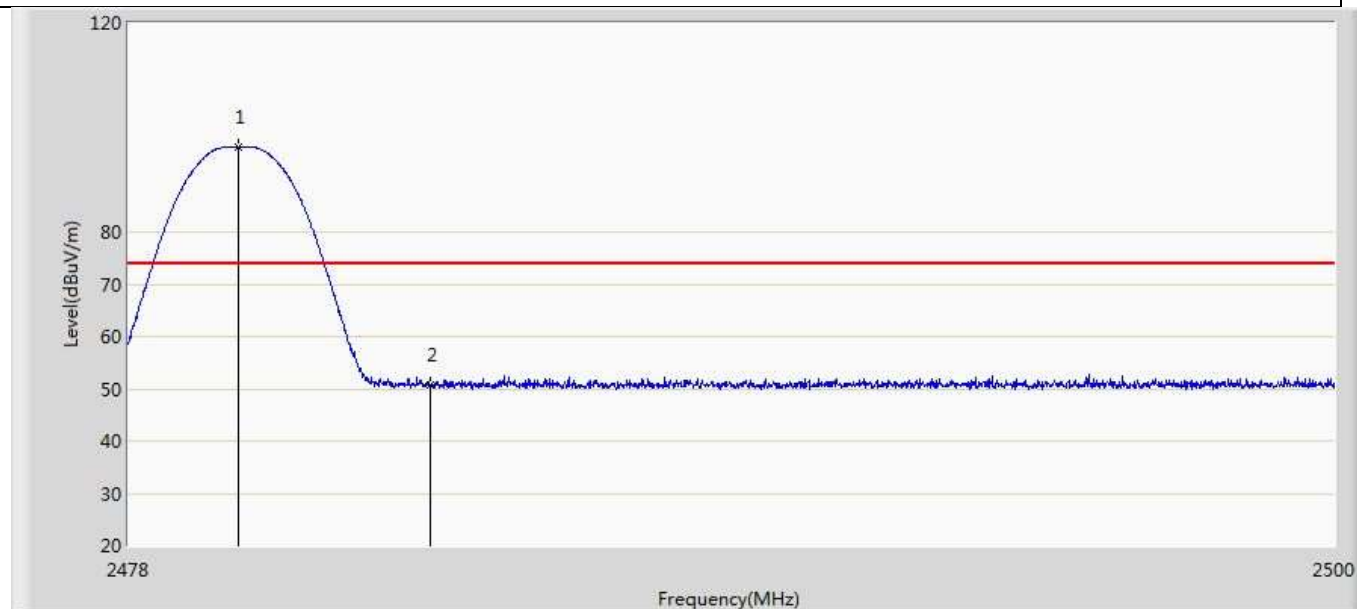


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	96.154	60.855	N/A	N/A	35.299	PK
2		2483.500	50.624	15.326	-23.376	74.000	35.297	PK

Profile: 2040811R	Page No.: 8
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by DH5	

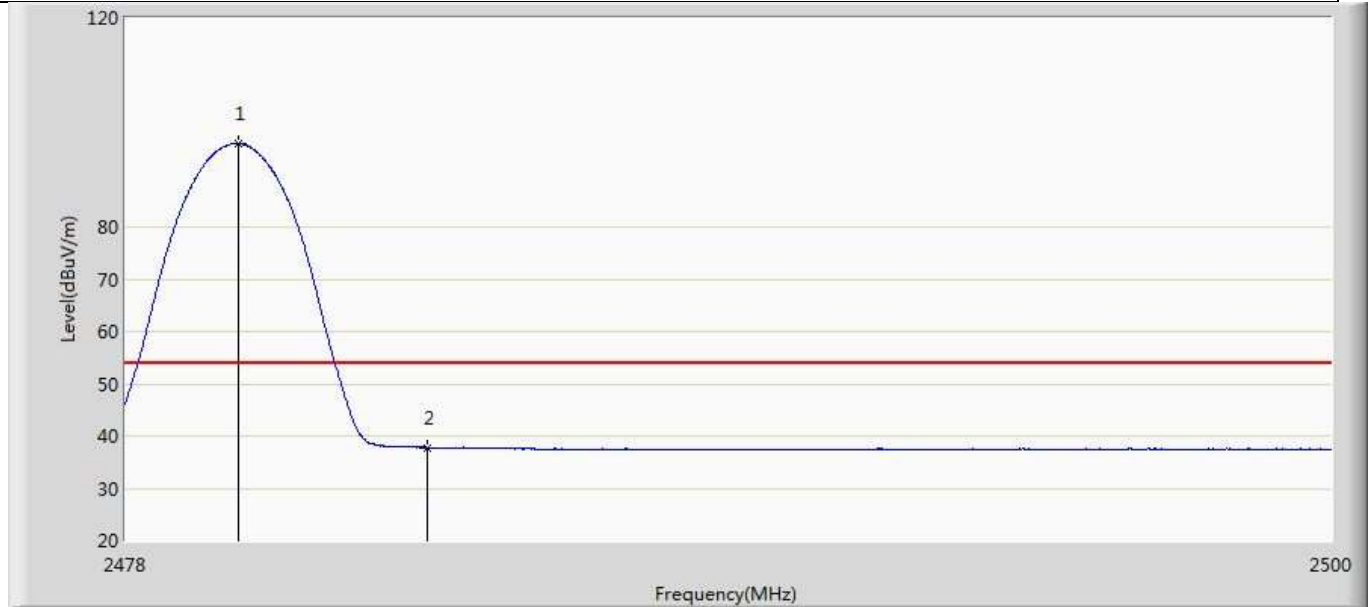


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	95.934	60.635	N/A	N/A	35.299	AV
2		2483.500	37.819	2.521	-16.181	54.000	35.297	AV

Profile: 2040811R	Page No.: 9
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

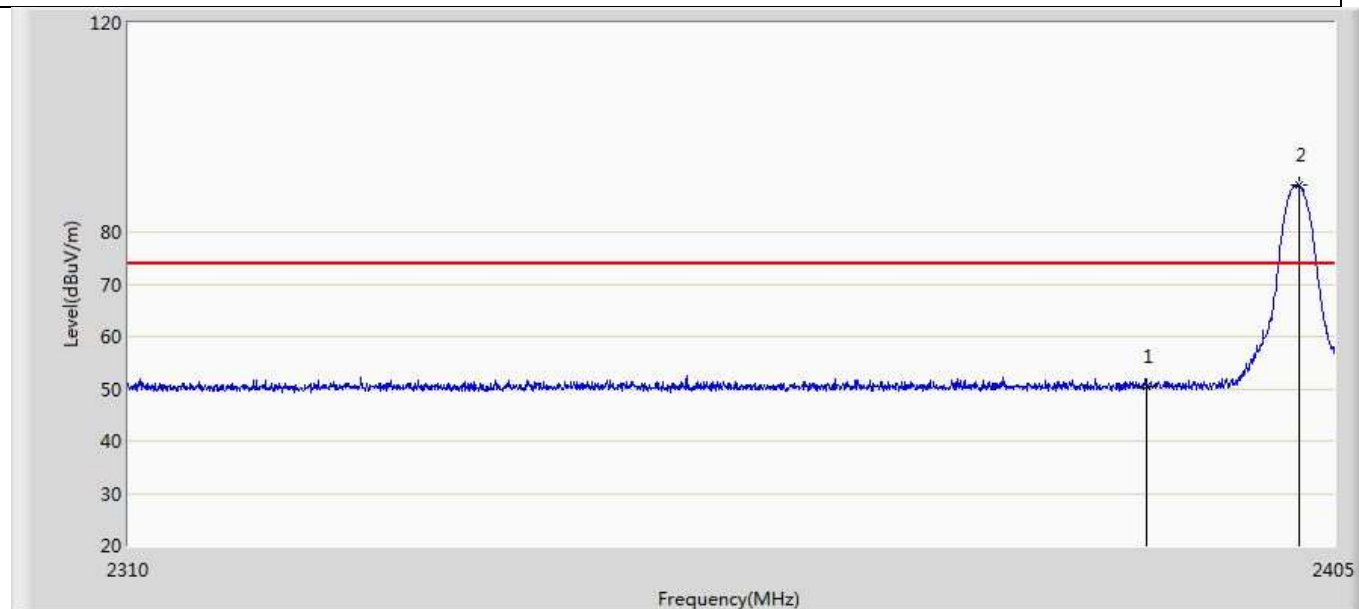


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.411	15.096	-23.589	74.000	35.315	PK
2	*	2402.150	89.117	53.805	N/A	N/A	35.312	PK

Profile: 2040811R	Page No.: 10
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

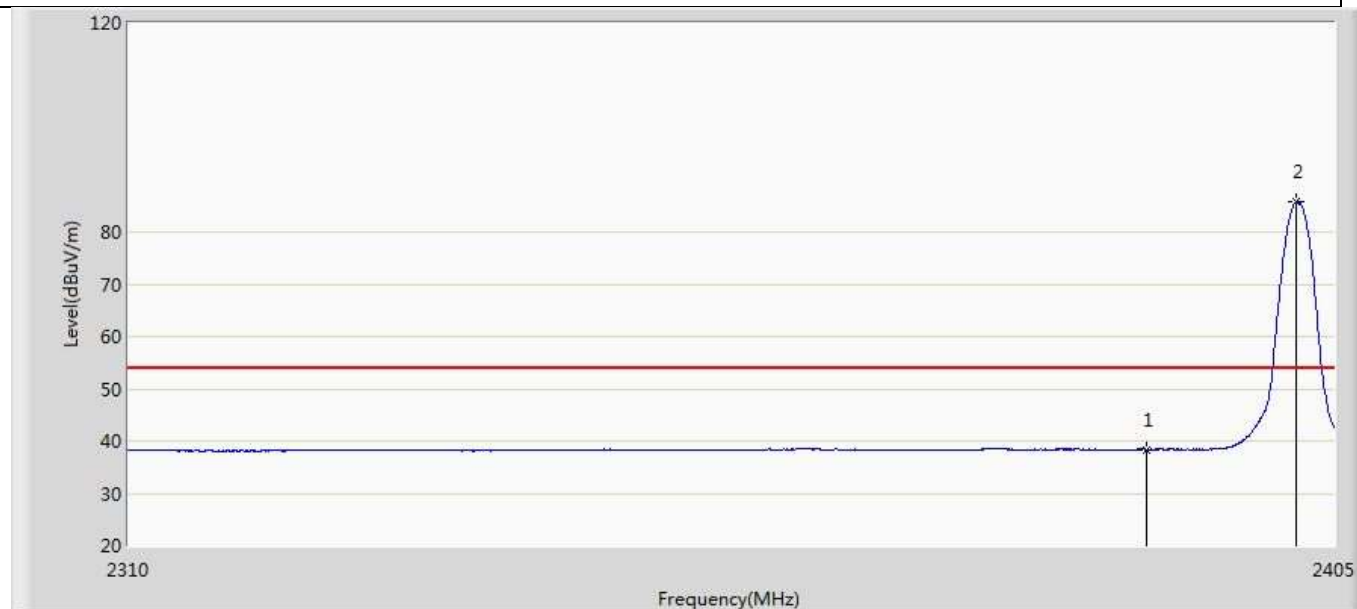


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.376	3.061	-15.624	54.000	35.315	AV
2	*	2402.000	85.832	50.520	N/A	N/A	35.312	AV

Profile: 2040811R	Page No.: 11
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

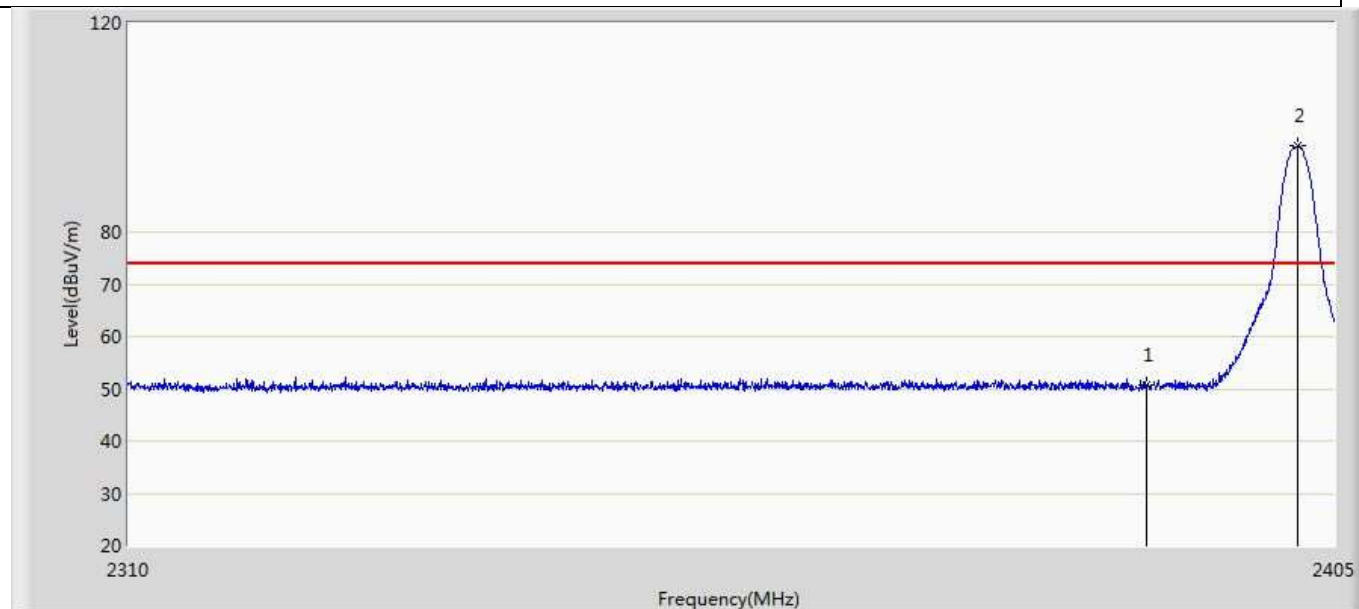


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.683	15.368	-23.317	74.000	35.315	PK
2	*	2402.055	96.380	61.068	N/A	N/A	35.312	PK

Profile: 2040811R	Page No.: 12
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

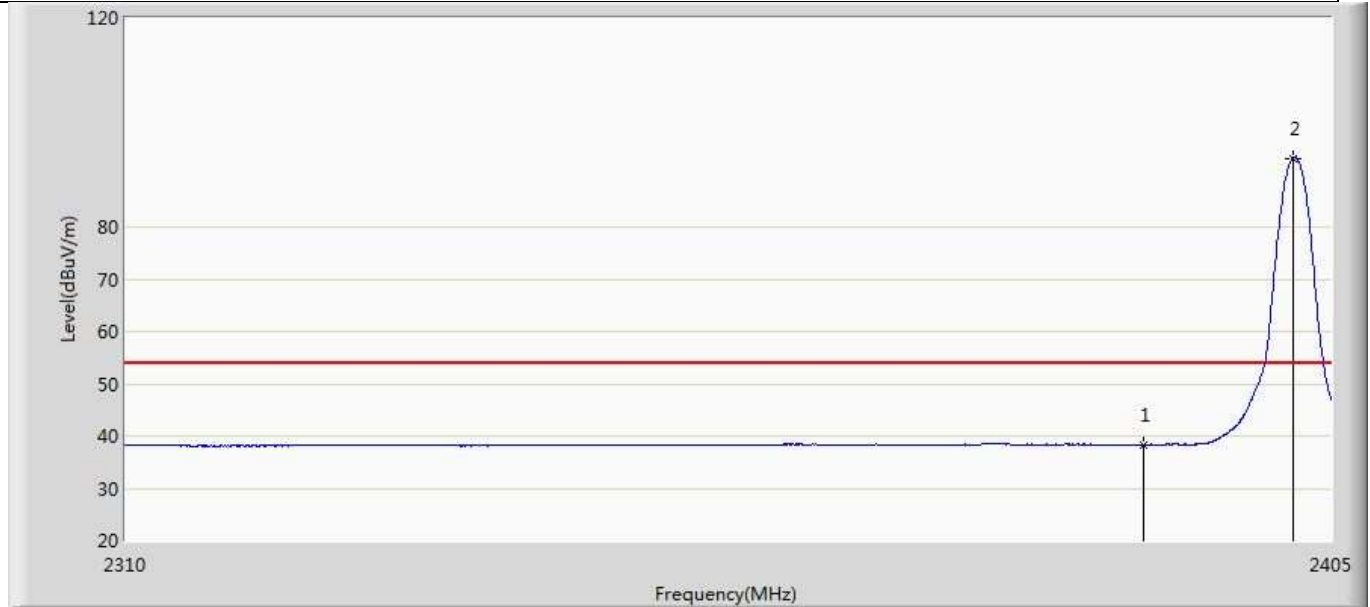


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.358	3.043	-15.642	54.000	35.315	AV
2	*	2401.913	93.150	57.837	N/A	N/A	35.312	AV

Profile: 2040811R	Page No.: 13
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

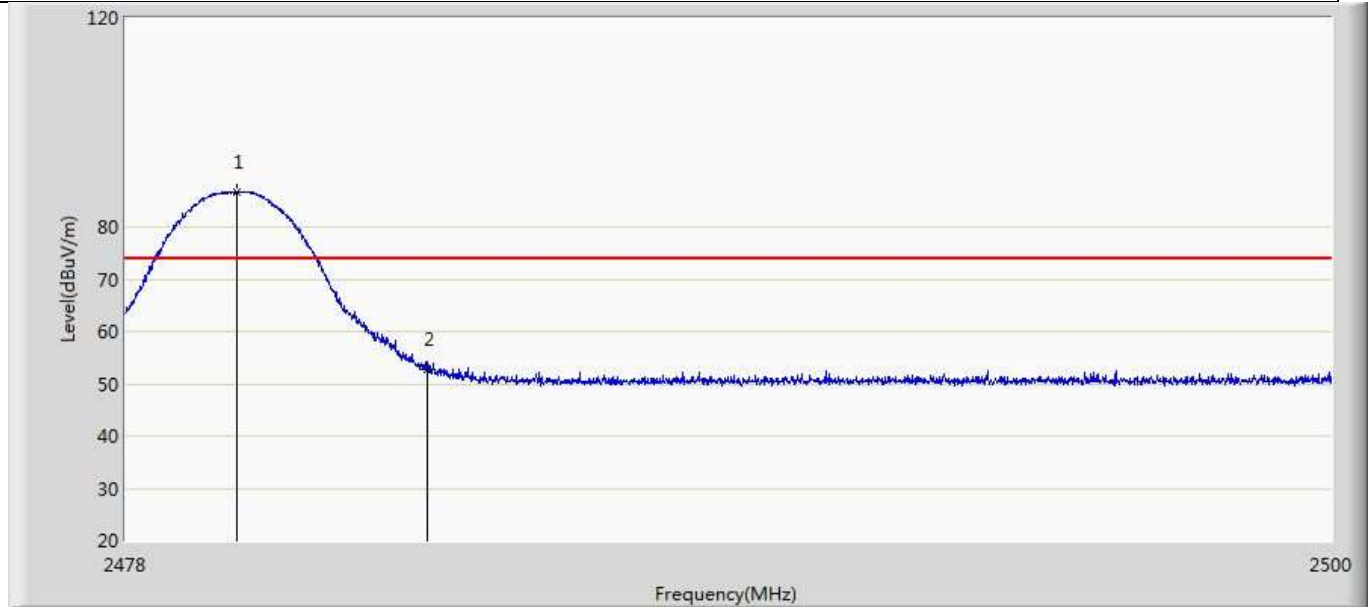


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.024	86.619	51.320	N/A	N/A	35.299	PK
2		2483.500	52.622	17.324	-21.378	74.000	35.297	PK

Profile: 2040811R	Page No.: 14
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

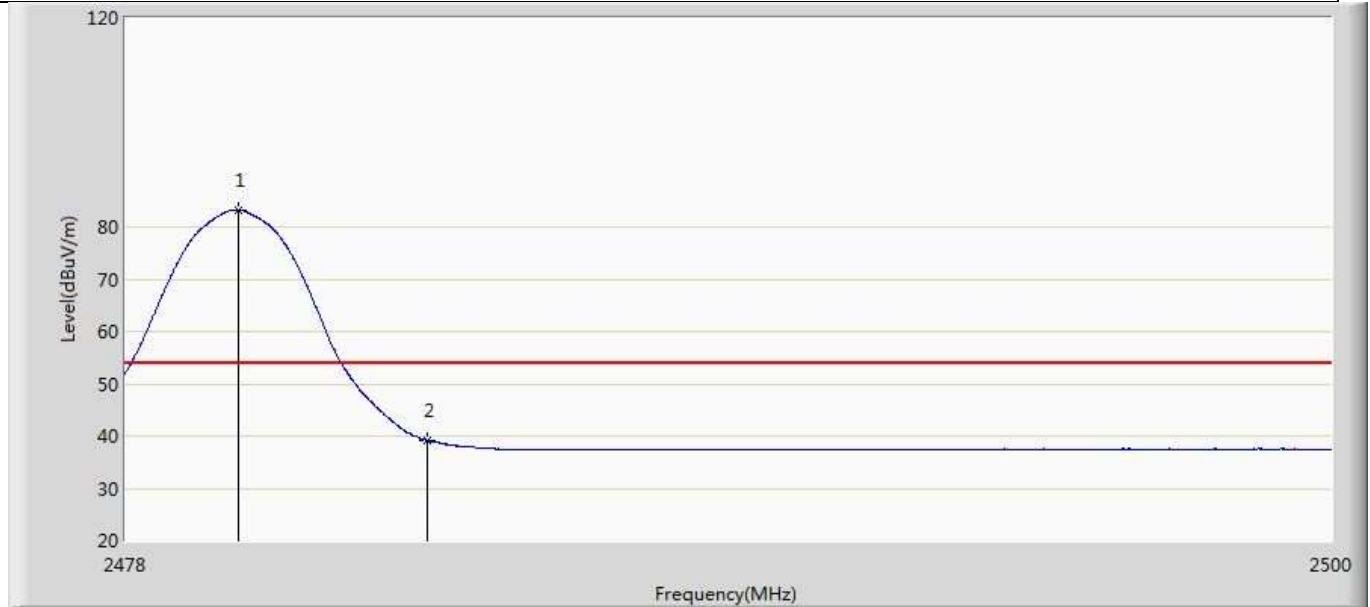


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	83.273	47.974	N/A	N/A	35.299	AV
2		2483.500	39.176	3.878	-14.824	54.000	35.297	AV

Profile: 2040811R	Page No.: 15
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

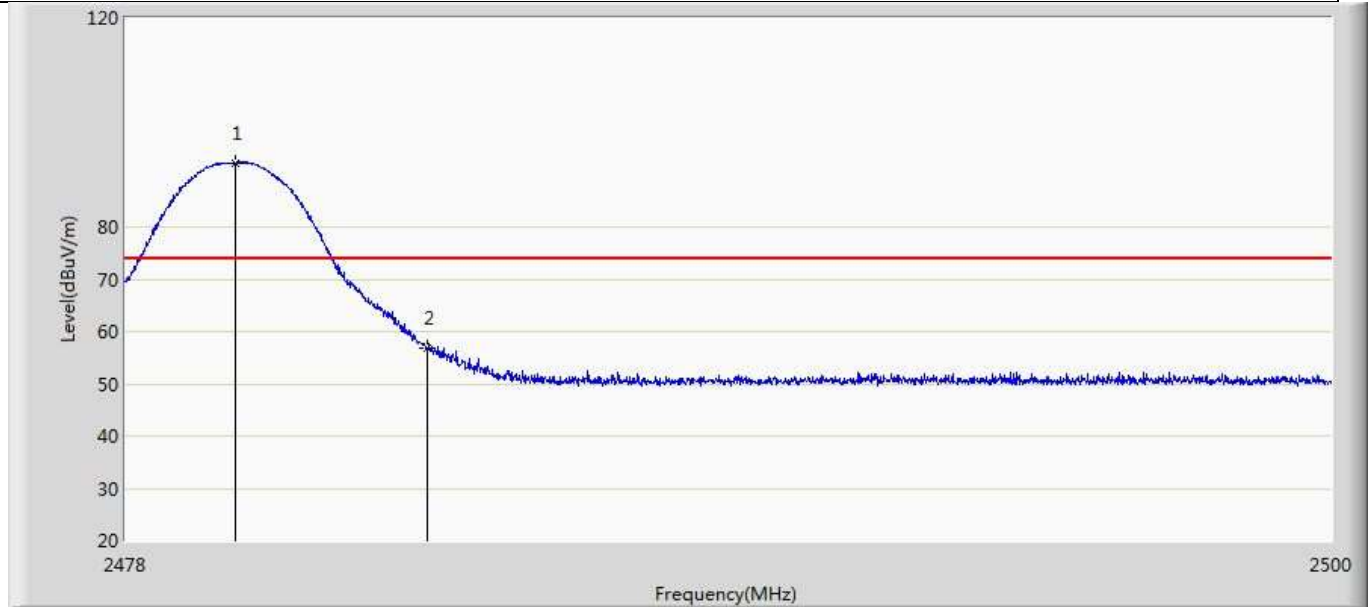


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.002	92.300	57.001	N/A	N/A	35.299	PK
2		2483.500	56.788	21.490	-17.212	74.000	35.297	PK

Profile: 2040811R	Page No.: 16
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

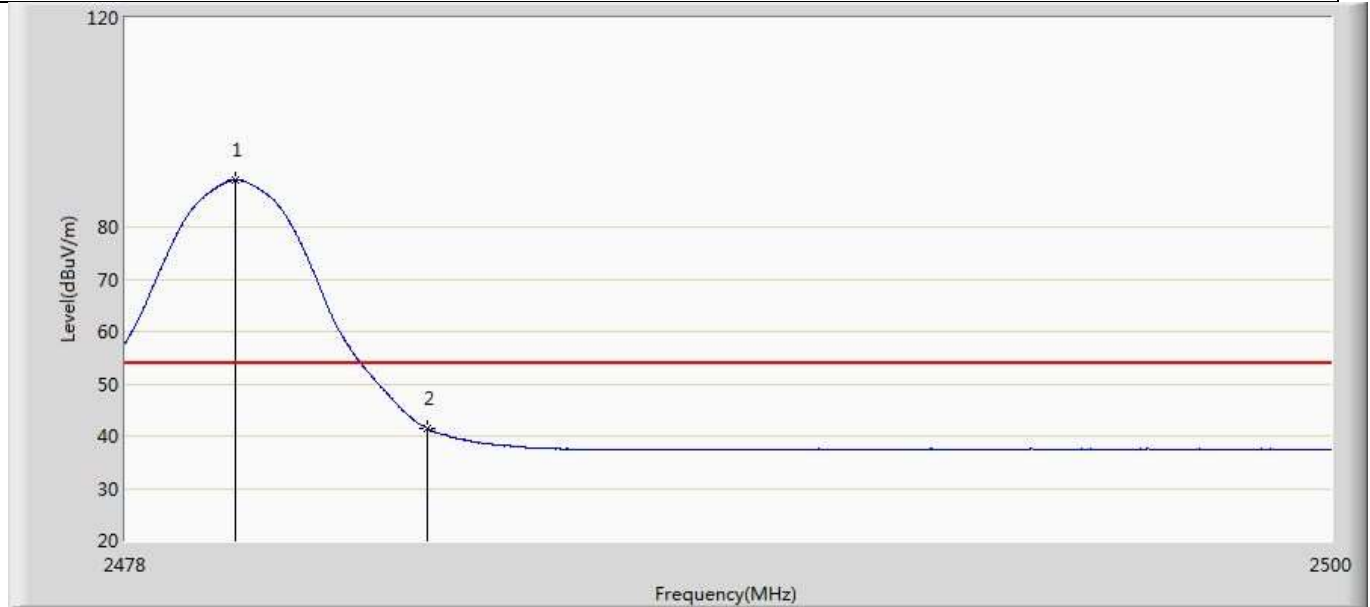


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	88.954	53.655	N/A	N/A	35.299	AV
2		2483.500	41.461	6.163	-12.539	54.000	35.297	AV

Profile: 2040811R	Page No.: 17
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

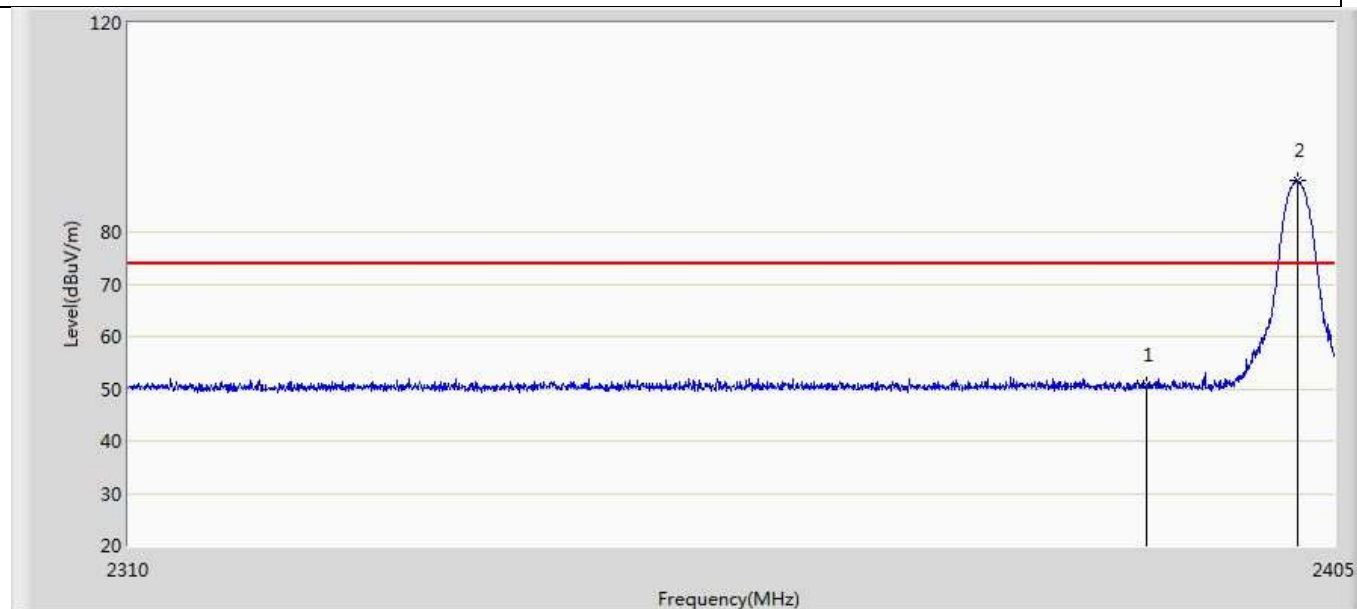


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.618	15.303	-23.382	74.000	35.315	PK
2	*	2402.055	89.909	54.597	N/A	N/A	35.312	PK

Profile: 2040811R	Page No.: 18
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

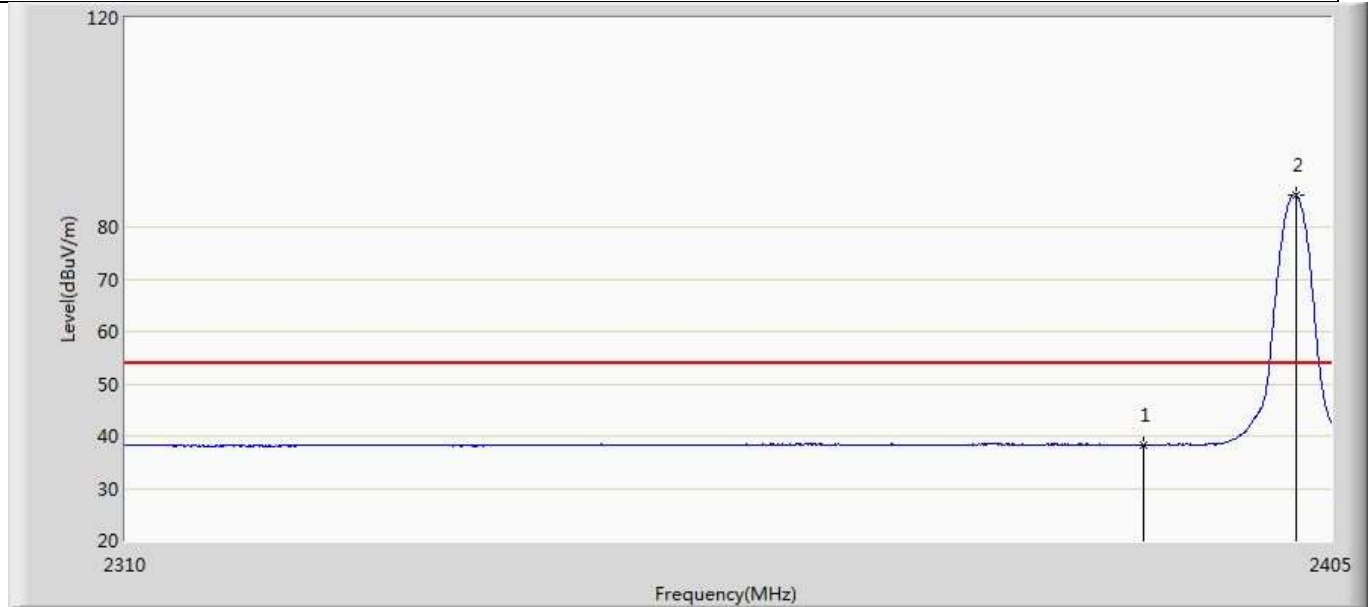


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.346	3.031	-15.654	54.000	35.315	AV
2	*	2402.198	86.159	50.847	N/A	N/A	35.312	AV

Profile: 2040811R	Page No.: 19
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 20:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

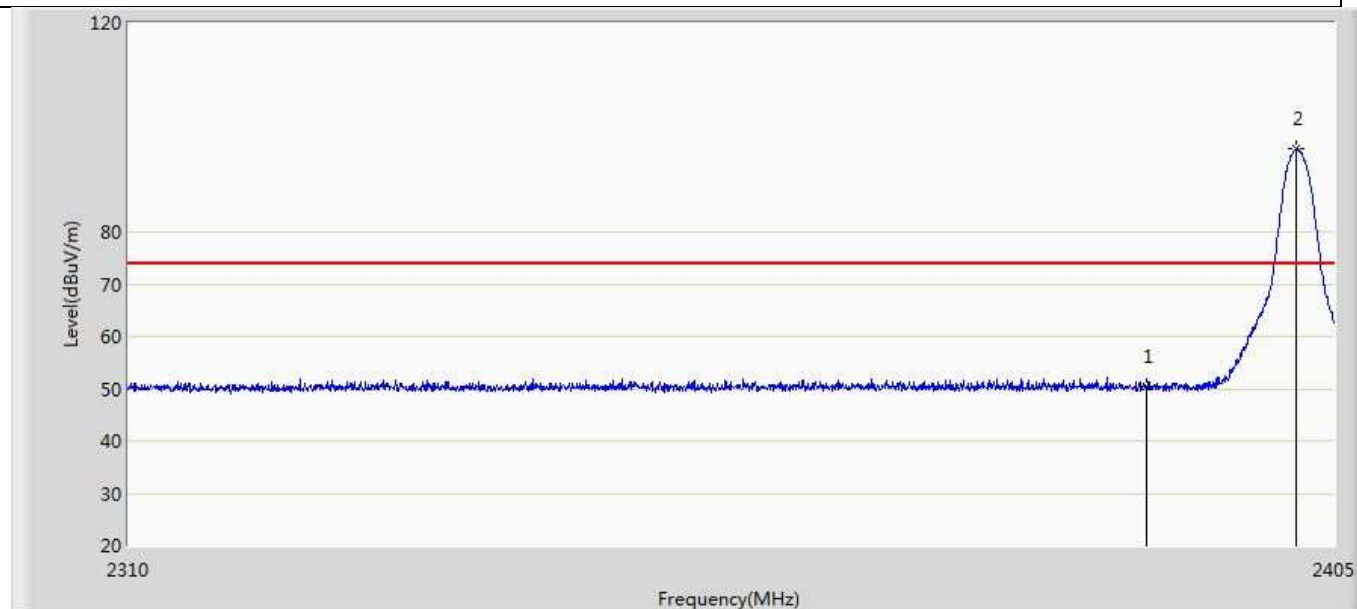


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.426	15.111	-23.574	74.000	35.315	PK
2	*	2402.008	95.948	60.636	N/A	N/A	35.312	PK

Profile: 2040811R	Page No.: 20
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 20:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

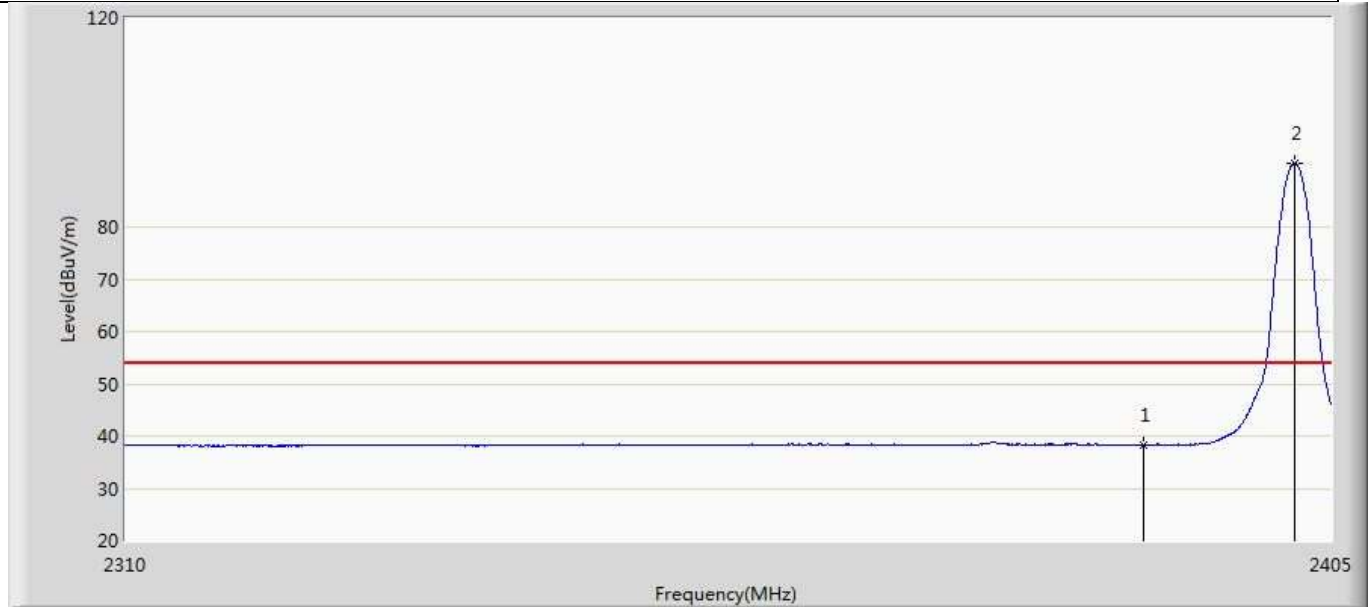


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.378	3.063	-15.622	54.000	35.315	AV
2	*	2402.055	92.272	56.960	N/A	N/A	35.312	AV

Profile: 2040811R	Page No.: 21
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 20:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

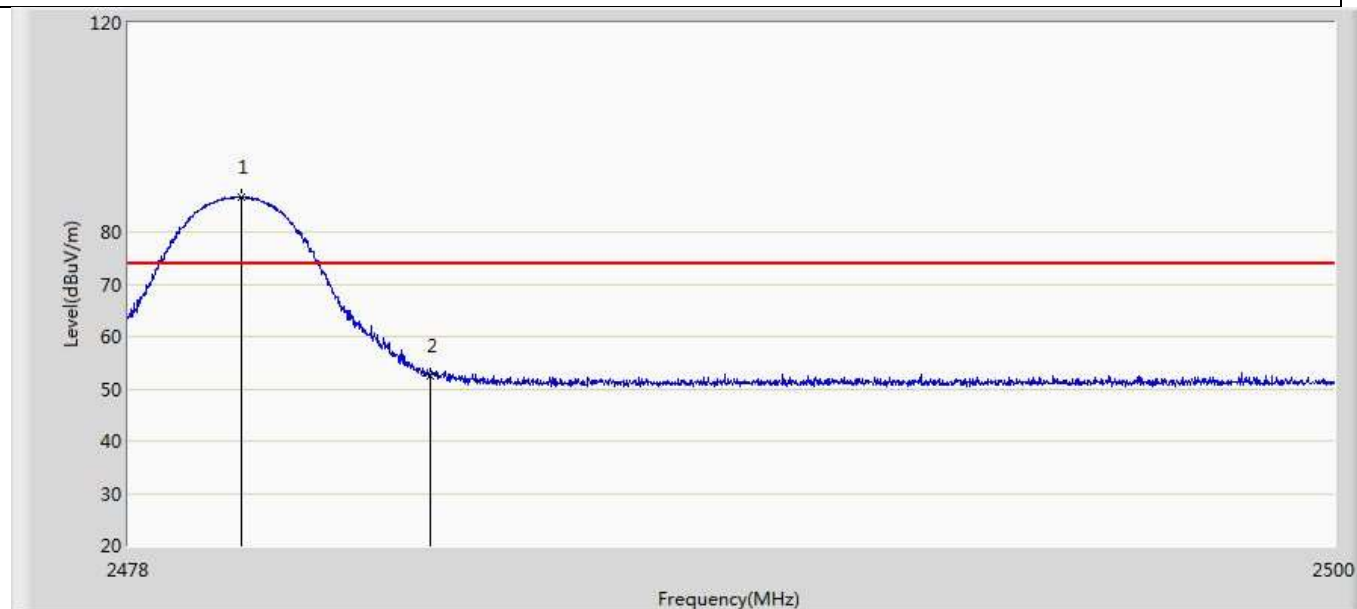


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	86.697	51.398	N/A	N/A	35.299	PK
2		2483.500	52.415	17.117	-21.585	74.000	35.297	PK

Profile: 2040811R	Page No.: 22
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 20:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

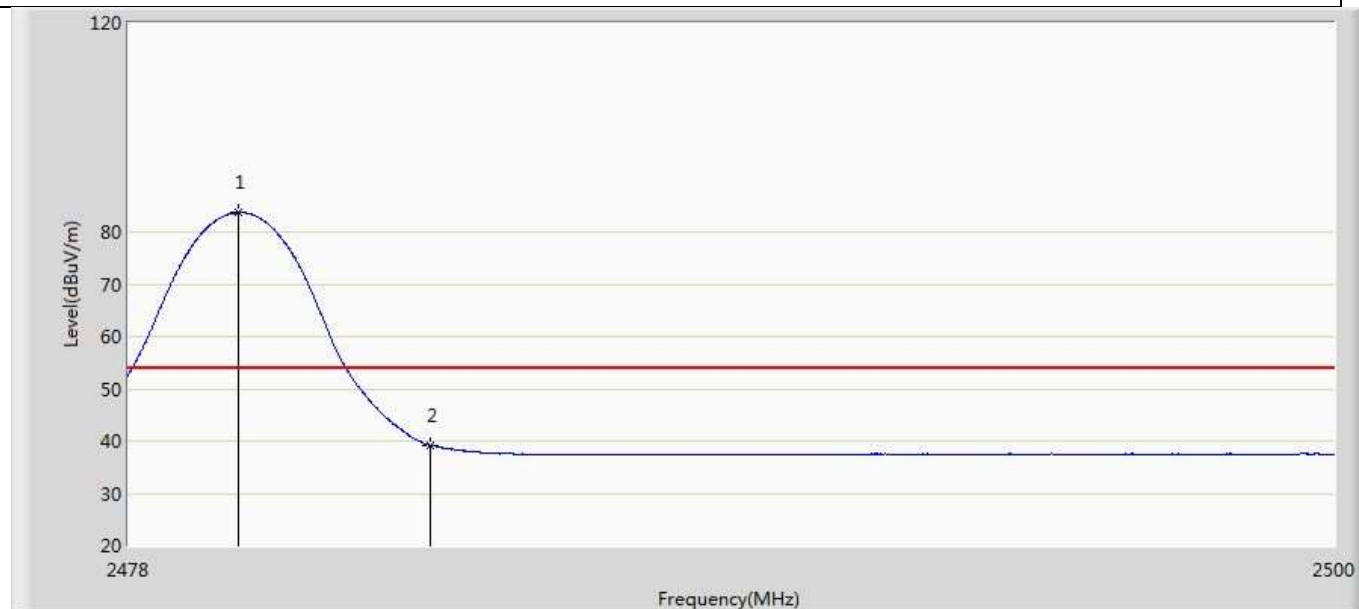


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	83.689	48.390	N/A	N/A	35.299	AV
2		2483.500	39.209	3.911	-14.791	54.000	35.297	AV

Profile: 2040811R	Page No.: 23
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 20:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

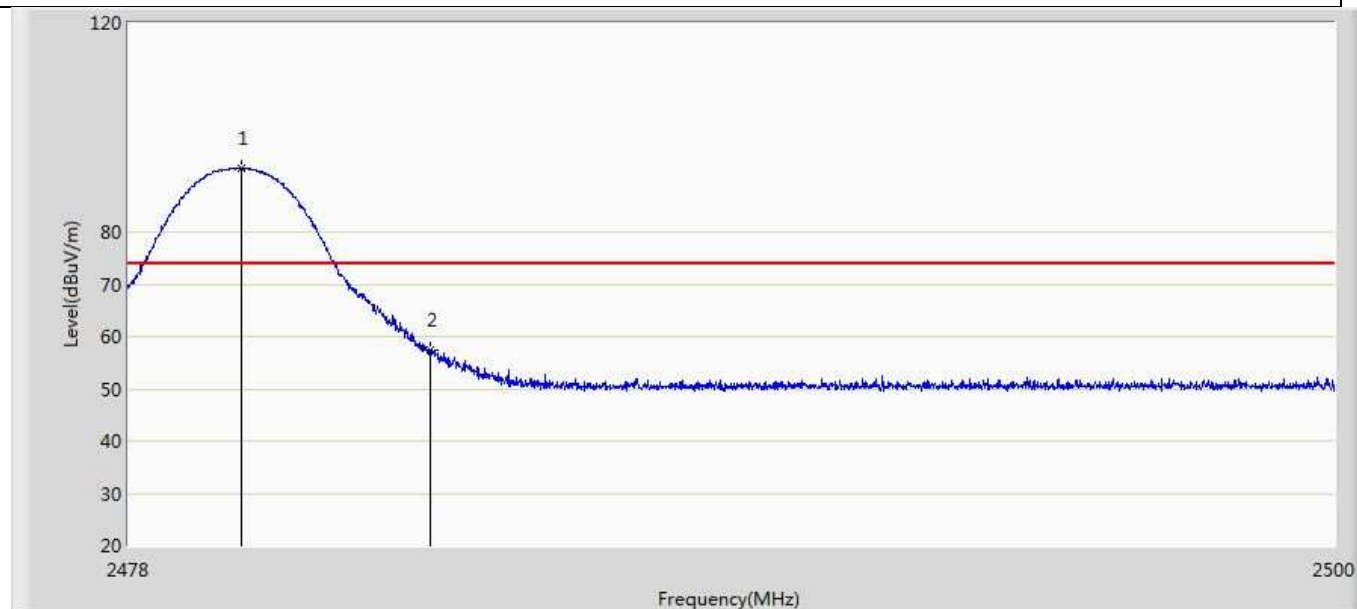

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.057	92.265	56.966	N/A	N/A	35.299	PK
2		2483.500	57.512	22.214	-16.488	74.000	35.297	PK

Profile: 2040811R	Page No.: 24
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 20:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ BT WICED Module	Power: DC 3.3V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

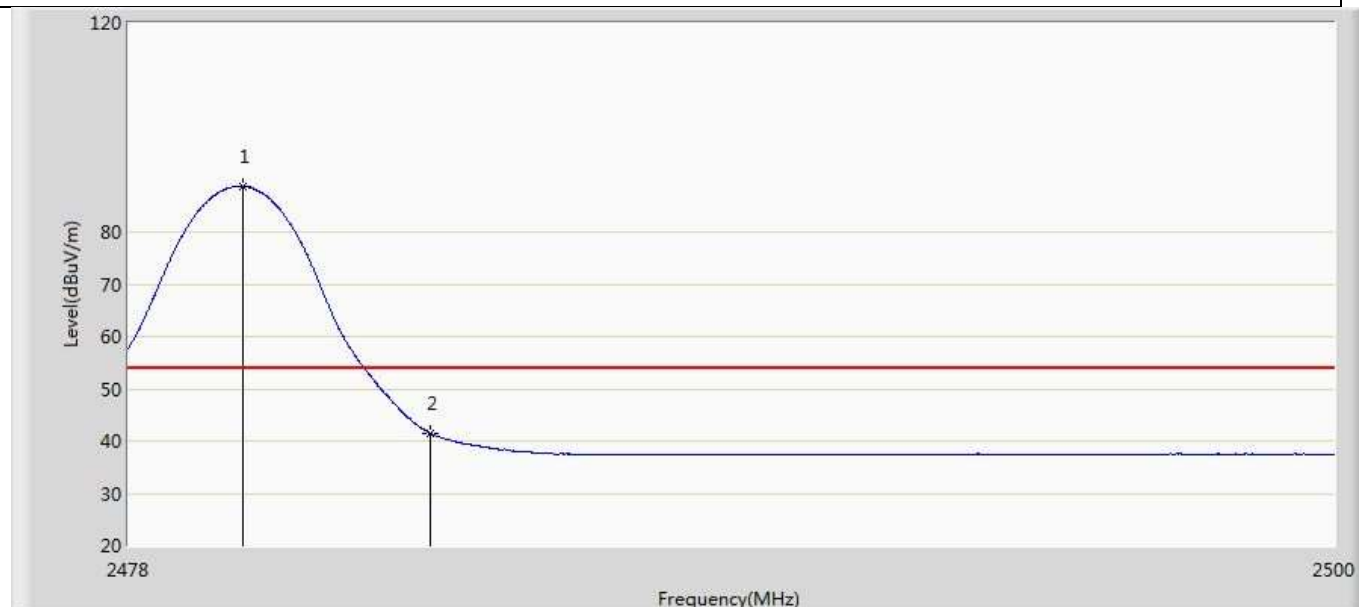

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.079	88.731	53.432	N/A	N/A	35.299	AV
2		2483.500	41.407	6.109	-12.593	54.000	35.297	AV

Note:

1. Measured Level = Reading Level + Factor.
2. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
3. As the radiated emission was performed, so conducted emission was not tested.

4.11 Antenna Requirement**VERDICT: PASS****4.11.1 Limit:**

Standard	FCC Part 15 Subpart C Paragraph 15.203
----------	--

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.11.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____