

TEST REPORT

Application No.: KSCR2512002864AT
FCC ID: WBK-RU243171
Applicant: BTI Wireless
Address of Applicant: 11205 Knott Avenue - Suite A, Cypress, CA 90630, United States
Manufacturer: BTI Wireless
Address of Manufacturer: 11205 Knott Avenue - Suite A, Cypress, CA 90630, United States
Equipment Under Test (EUT):
EUT Name: Remote Radio Unit
Model No.: RU2431
Trade mark:



Standard(s) : 47 CFR Part 2
47 CFR Part 27N
Date of Receipt: 2025-12-30
Date of Test: 2026-01-12 to 2026-01-24
Date of Issue: 2026-01-26

Test Result:	Pass
---------------------	-------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2026-01-26	/

Authorized for issue by:			
Tested By		Kass Gao	
		Kass Gao /Project Engineer	
Approved By		Terry Hou	
		Terry Hou /Reviewer	



Report No.: KSCR251200286401

Page: 3 of 18

2 Test Summary

Test Item	FCC Rule No.	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50	Pass
Peak-Average Ratio	§27.50	Pass
Bandwidth	§2.1049	Pass
Band Edge Compliance	§2.1051, §27.53	Pass
Spurious emissions at antenna terminals	§2.1051, §27.53	Pass
Field strength of spurious radiation	§2.1053, §27.55	Pass
Frequency stability	§2.1055, §27.54	Pass



3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 General Description of E.U.T.	5
4.2 Details of E.U.T.	5
4.3 Test Frequency	5
4.4 Test Support Unit	6
4.5 Measurement Uncertainty	6
4.6 Test Location	7
4.7 Test Facility	7
4.8 Deviation from Standards	7
4.9 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Matter Test Results	9
6.1 Effective (Isotropic) Radiated Power Output Data	9
6.2 Peak-Average Ratio	11
6.3 Bandwidth	12
6.4 Band Edge Compliance	13
6.5 Spurious emissions at antenna terminals	14
6.6 Field strength of spurious radiation	15
6.7 Frequency stability	17
7 Test Setup Photographs	18
8 EUT Constructional Details	18



4 General Information

4.1 General Description of E.U.T.

Power Supply:	DC -48V
Test Voltage:	DC -48V

4.2 Details of E.U.T.

Product Name:	Remote Radio Unit
Model No.:	RU2431
Antenna Type:	External Antenna
Antenna Gain:	18dBi (Provided by manufacturer)
Number of Carriers:	1CC
Support Bandwidth:	5MHz, 10MHz, 15MHz, 20MHz
Type of Modulation:	QPSK, 16QAM, 64QAM
Frequency Band:	LTE Band 71
Frequency Range:	DL: 617MHz-652MHz UL: 663MHz-698MHz
Nominal Output Power per Antenna Port:	43dBm
Antenna Delivery:	SISO, 2T2R MIMO

Note: The antenna gain value is provided by the customer. The test lab will not be responsible for wrong test result due to incorrect information about antenna gain values.

4.3 Test Frequency

	Carrier	Bandwidth (MHz)	Frequency (MHz)		
			Bottom Channel	Middle Channel	Top Channel
LTE Band 71	1CC	5	619.5	634.5	649.5
	1CC	10	622	634.5	647
	1CC	15	624.5	634.5	644.5
	1CC	20	627	634.5	642



Report No.: KSCR251200286401

Page: 6 of 18

4.4 Test Support Unit

Description	Manufacture	Model No.	S/N
DC power supply	Agilent	E3632A	/
Notebook	LENOVO	K27	EB24537645
Base Band Unit	BTI Wireless	sCELL-T4000	/

4.5 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz) 5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz) 4.5dB (30MHz-1GHz) 5.1dB (1GHz-18GHz) 5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1172)**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

- **VCCI (Member No:1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None



Report No.: KSCR251200286401

Page: 8 of 18

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	07/09/2025	07/08/2026
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	07/09/2025	07/08/2026
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	12/17/2025	12/16/2026
4	Signal Generator	R&S	SMBV100B	KSEM032	12/17/2025	12/16/2026
5	Signal Generator	R&S	SMW200A	KSEM020-1	07/09/2025	07/08/2026
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	07/08/2025	07/07/2026
7	Signal Generator	Agilent	E8257C	KS301066	07/22/2025	07/21/2026
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	07/09/2025	07/08/2026
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	12/17/2025	12/16/2026
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	07/08/2025	07/07/2026
11	Switcher	TST	FY562	KUS2001M001-4	12/17/2025	12/16/2026
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	12/17/2025	12/16/2026
13	Attenuator	junke	DTS200G-30-1N	KSEM025-10	04/15/2025	04/14/2026
14	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	07/15/2025	07/14/2026
15	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	12/30/2025	12/29/2026
16	Software	BST	TST-PASS	/	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	07/09/2025	07/08/2026
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	12/17/2025	12/16/2026
3	Signal Generator	Agilent	E8257C	KS301066	07/22/2025	07/21/2026
4	Loop Antenna (9KHz-30MHz)	COM-POWER	AL-130R	KUS1806E001	07/11/2025	07/10/2026
5	Bilog Antenna (30MHz-1GHz)	TESEQ	CBL 6112D	KUS1806E005	07/12/2025	07/11/2026
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	01/11/2026	01/10/2028
7	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/11/2026	01/10/2028
8	Amplifier(30MHz~1GHz)	TST	LNA009100G30	KSEM061	12/18/2025	12/17/2026
9	Amplifier(400MHz~8GHz)	TST	LNA004080G30	KSEM062	12/18/2025	12/17/2026
10	Amplifier(1GHz~18GHz)	TST	LNA010180G45	KSEM039	07/09/2025	07/08/2026
11	Amplifier(18~40GHz)	TST	LNA180400G40	KSEM038	07/09/2025	07/08/2026
12	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	12/30/2025	12/29/2026
13	Software	ESE	E3_V 6.111221a	/	NCR	NCR
14	Measurement Software	Tonscend	JS32-RE V5.0.0.1	/	NCR	NCR
15	Measurement Software	Tonscend	JS32-RSE V5.0.0.0	/	NCR	NCR

6 Radio Spectrum Matter Test Results

6.1 Effective (Isotropic) Radiated Power Output Data

Test Requirement: §2.1046, §27.50

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: $ERP \leq 60\text{dBm/MHz}$


6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 52.5 % RH Atmospheric Pressure: 1010 mbar

Test mode: 00: Tx mode, Keep the EUT in transmitting mode.

6.1.2 Test Setup Diagram

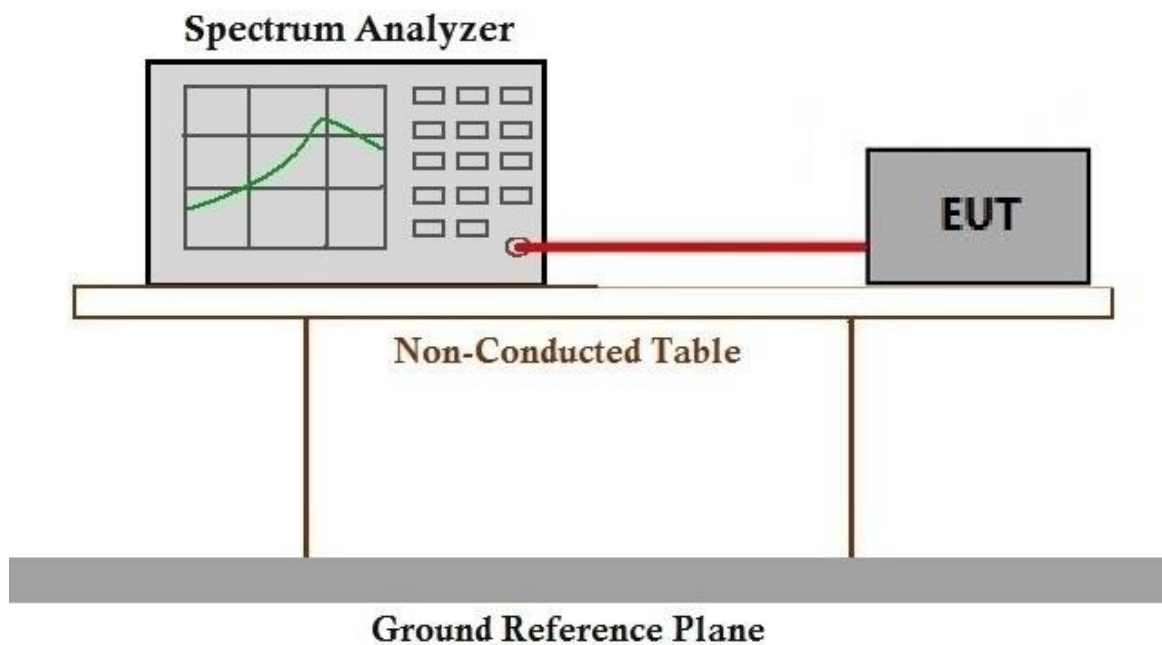



6.1.3 Measurement Data

Test Procedure:

Many contemporary EUTs utilize multiple output ports to accommodate multiple-input and multiple-output (MIMO) technologies. In these cases it may be necessary to measure the RF power at each output port and then sum the measured power levels (in linear terms) to determine the effective total RF output power.

EUT supports MIMO and each antenna port is the same, according to C63.26 6.4, a coefficient is added to the single antenna port power to calculate the total power. 2x2 MIMO add $10\lg(2)=3.01$ dB.

Please refer to Appendix


6.2 Peak-Average Ratio

Test Requirement: §27.50
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: $\leq 13\text{dB}$

6.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 24.5 °C Humidity: 52.5 % RH Atmospheric Pressure: 1010 mbar
 Test mode: 00: Tx mode, Keep the EUT in transmitting mode.

6.2.2 Test Setup Diagram

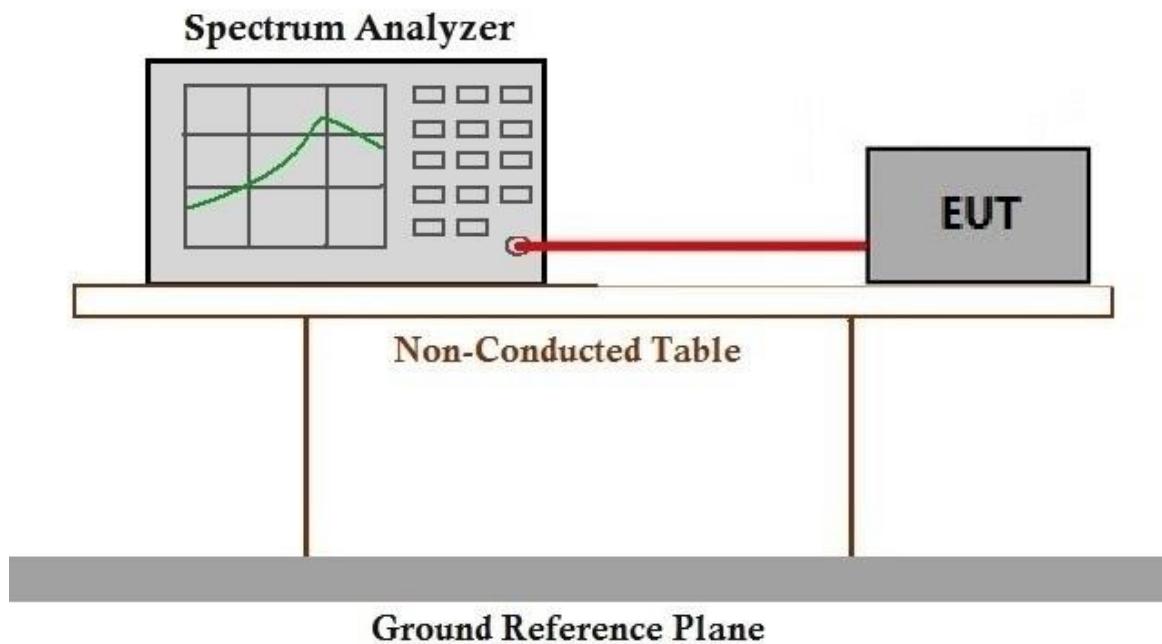

6.2.3 Measurement Data

Please refer to Appendix


6.3 Bandwidth

Test Requirement: §2.1049
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: OBW: No limit
 EBW: No limit

6.3.1 E.U.T. Operation

Operating Environment:
 Temperature: 24.5 °C Humidity: 52.5 % RH Atmospheric Pressure: 1010 mbar
 Test mode: 00: Tx mode, Keep the EUT in transmitting mode.

6.3.2 Test Setup Diagram

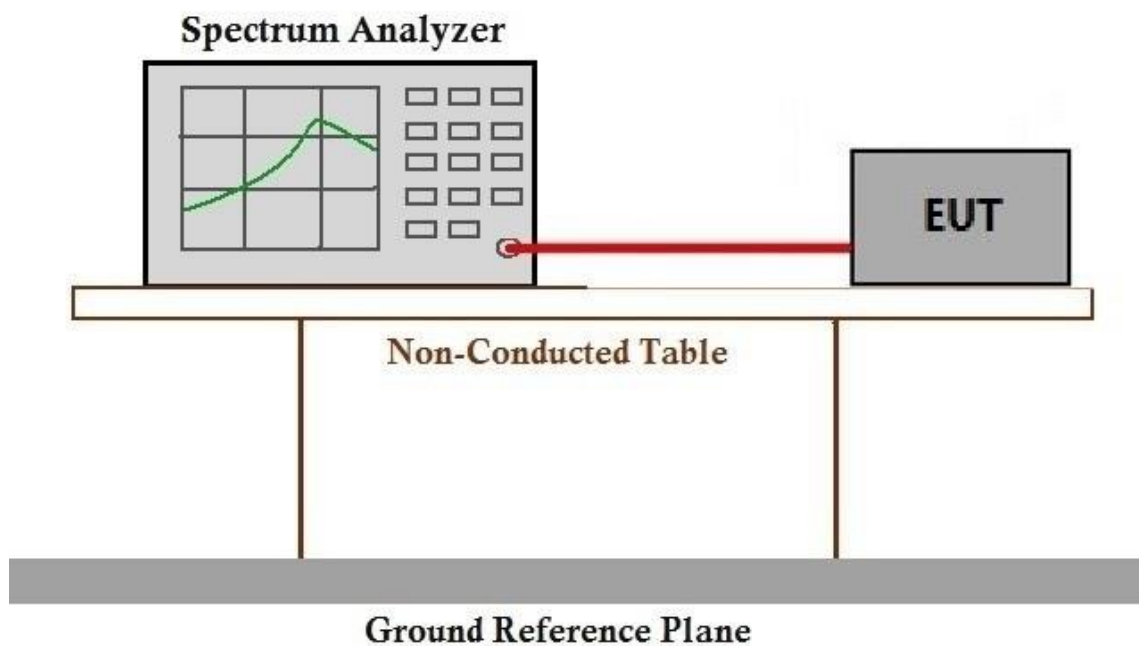

6.3.3 Measurement Data

Please refer to Appendix

6.4 Band Edge Compliance

Test Requirement: §2.1051, §27.53

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: $\leq -13\text{dBm/MHz}$


6.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 52.5 % RH Atmospheric Pressure: 1010 mbar

Test mode: 00: Tx mode, Keep the EUT in transmitting mode.

6.4.2 Test Setup Diagram

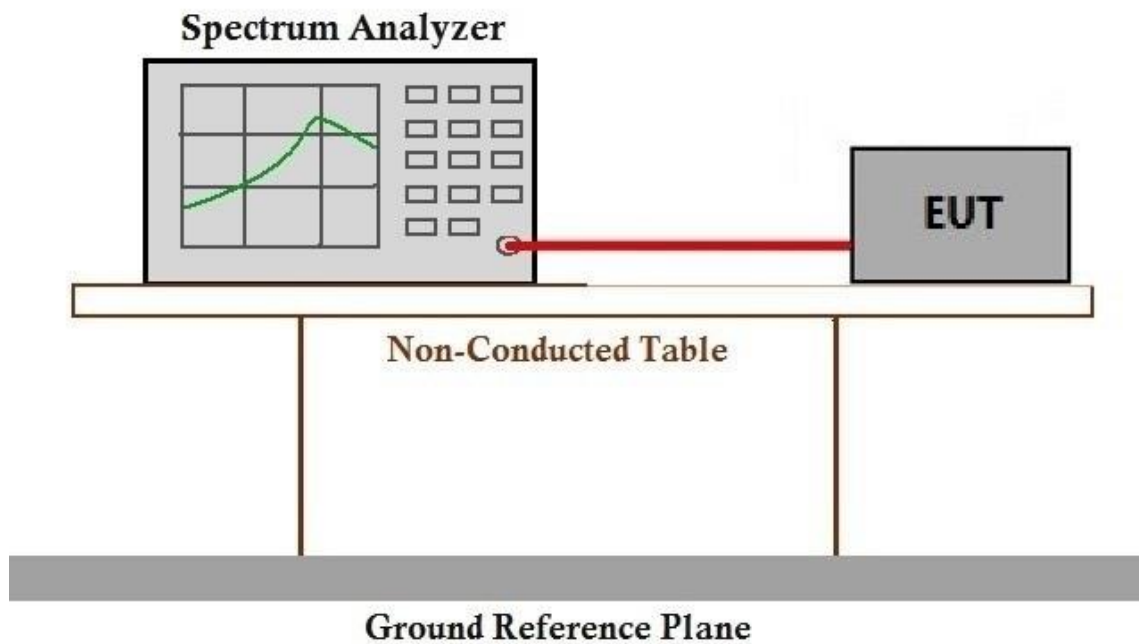

6.4.3 Measurement Data

Please refer to Appendix

6.5 Spurious emissions at antenna terminals

Test Requirement: §2.1051, §27.53

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: $\leq -13\text{dBm/MHz}$


6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 52.5 % RH Atmospheric Pressure: 1010 mbar

Test mode: 00: Tx mode, Keep the EUT in transmitting mode.

6.5.2 Test Setup Diagram

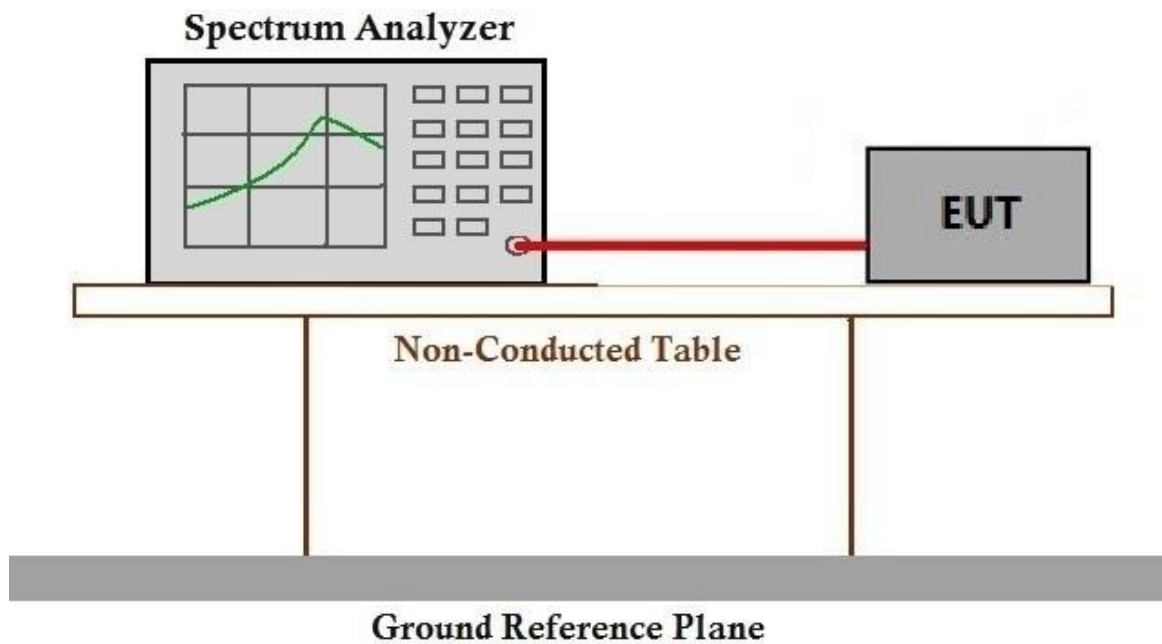

6.5.3 Measurement Data

Please refer to Appendix

6.6 Field strength of spurious radiation

Test Requirement: §2.1053, §27.55

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: $\leq -13\text{dBm/MHz}$


6.6.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 52.5 % RH Atmospheric Pressure: 1010 mbar

Test mode: 00: Tx mode, Keep the EUT in transmitting mode.

6.6.2 Test Setup Diagram

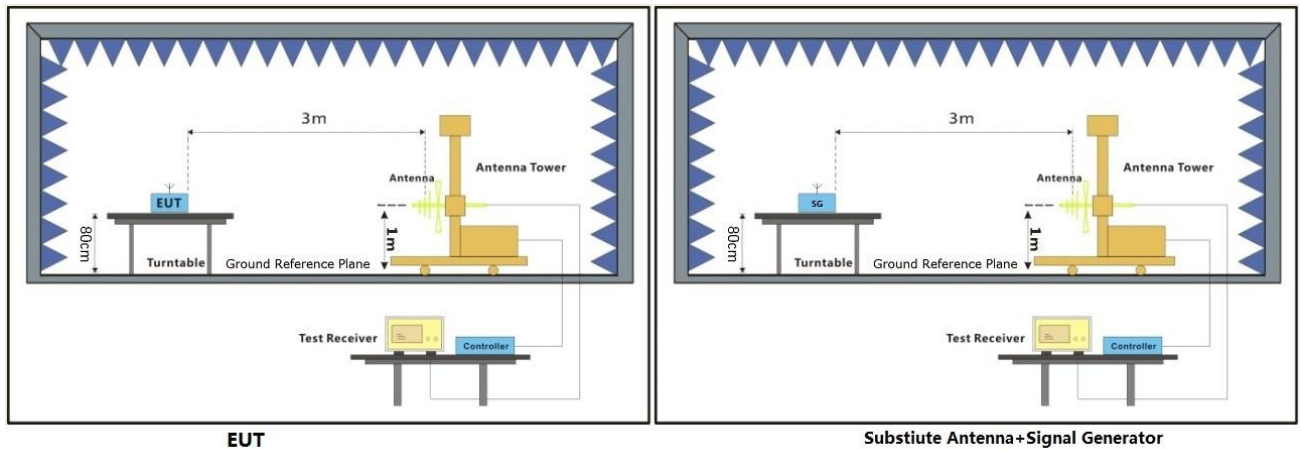

6.6.3 Measurement Procedure and Data

Test Procedure:

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

Please refer to Appendix

6.7 Frequency stability

Test Requirement: §2.1055, §27.54

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: Fundamental emission stays within authorized frequency block


6.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 52.5 % RH Atmospheric Pressure: 1010 mbar

Test mode: 00: Tx mode, Keep the EUT in transmitting mode.

6.7.2 Test Setup Diagram

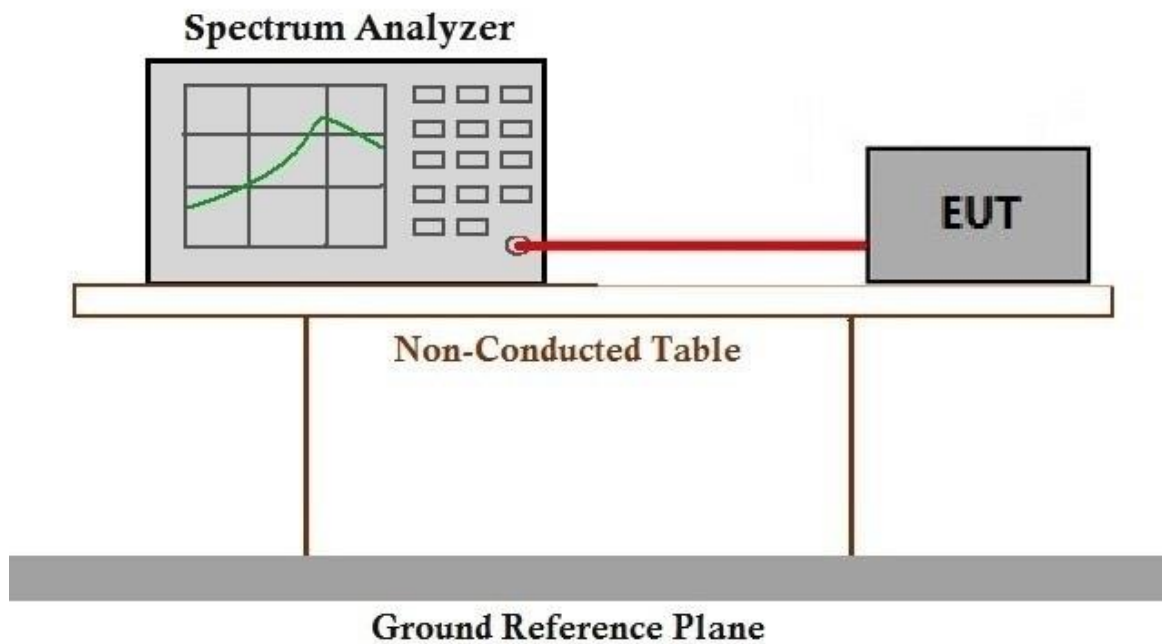

6.7.3 Measurement Data

Please refer to Appendix



Report No.: KSCR251200286401

Page: 18 of 18

7 Test Setup Photographs

Refer to Appendix - Test Setup Photo for KSCR2512002864AT

8 EUT Constructional Details

Refer to Appendix_Photographs of EUT Constructional Details for KSCR2512002864AT

- End of the Report -