



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Aerohive Networks Inc.
Applicant Address	330 Gibraltar Drive, Sunnyvale, CA 94089, USA
FCC ID	WBV-AP1130
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.

Product Name	Access Point
Brand Name	Aerohive
Model No.	AP1130
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jul. 22, 2014
Final Test Date	Sep. 10, 2014
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. EUT Operation during Test	11
3.10. Duty Cycle.....	12
3.11. Test Configurations	13
4. TEST RESULT	17
4.1. AC Power Line Conducted Emissions Measurement.....	17
4.2. Maximum Conducted Output Power Measurement.....	21
4.3. Power Spectral Density Measurement	25
4.4. 6dB Spectrum Bandwidth Measurement	33
4.5. Radiated Emissions Measurement	40
4.6. Emissions Measurement	59
4.7. Antenna Requirements	77
5. LIST OF MEASURING EQUIPMENTS	78
6. MEASUREMENT UNCERTAINTY.....	80
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR472301AA	Rev. 01	Initial issue of report	Nov. 03, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Access Point
Brand Name : Aerohive
Model No. : AP1130
Applicant : Aerohive Networks Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 22, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions (Note 1)	Complies	9.04 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	3.08 dB
4.3	15.247(e)	Power Spectral Density	Complies	6.37 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.14 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.07 dB
4.7	15.203	Antenna Requirements	Complies	-

Note 1: The adapter and PoE are for measurement only, would not be marketed. Thus, only adapter mode was tested for conducted emission test.

Note 2: The customer designated the test mode.

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth
Channel Band Width (99%)	<For Non-Beamforming Mode> MCS0/Nss1 (VHT20): 17.82 MHz <For Beamforming Mode> MCS0/Nss1 (VHT20): 17.69MHz
Maximum Conducted Output Power	<For Non-Beamforming Mode> MCS0/Nss1 (VHT20): 26.11 dBm <For Beamforming Mode> MCS0/Nss1 (VHT20): 25.53 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11b/g

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11b/g: 11
Channel Band Width (99%)	<For Non-Beamforming Mode> 11b: 12.50 MHz ; 11g: 17.62 MHz
Maximum Conducted Output Power	<For Non-Beamforming Mode> 11b: 25.29 dBm ; 11g: 24.28 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	☒ With beamforming in 802.11n/ac for 2.4G/5GHz ☐ Without beamforming

Antenna and Band width

Antenna	Single (TX)			Two (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11b	V	X	X	X	X	X
IEEE 802.11g	V	X	X	X	X	X
IEEE 802.11n	X	X	X	V	X	X
IEEE 802.11ac	X	X	X	V	X	X

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS0-15
802.11ac (VHT20)	2	MCS 0-8/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 in 2.4GHz.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20 in 2.4GHz.

Note 3: Modulation modes consist of below configuration:
HT20: IEEE 802.11ac

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Set	Brand	Model Name	Antenna Type	Connector
1	WNC	Veab-n01	Diople Antenna	N Type
2	WNC	Veab-n01	Diople Antenna	N Type
3	KBT	TDJ-5158BKR X 2A-RZ1	Panel Antenna	N Type

Set	Antenna Gain (dBi)		Cable Loss (dBi)		True Gain (dBi)		Remark
	2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz	
1	4.38	-	-	-	4.38	-	P to M
2	-	5.5	-	-	-	5.5	
3	-	18	-	0.9	-	17.1	P to P

Note : 1. The EUT has three set antennas.

2. The panel antenna polarization one is Horizontal and the other one is Vertical. Thus panel antenna doesn't need to evaluate array gain.

3. This product will require professional installation.

<For 2.4GHz Band>

For IEEE 802.11b/g mode (1TX/1RX):

Only Chain 1 can be used as transmitting/receiving antenna.

For IEEE 802.11n/ac mode (2TX/2RX):

Both Chain 1 and Chain 2 could transmit/receive simultaneously.


<For 5GHz Band>

For IEEE 802.11a mode (1TX/1RX):

Only Chain 3 can be used as transmitting/receiving antenna.

For IEEE 802.11n/ac mode (2TX/2RX):

Both Chain 3 and Chain 4 could transmit/receive simultaneously.

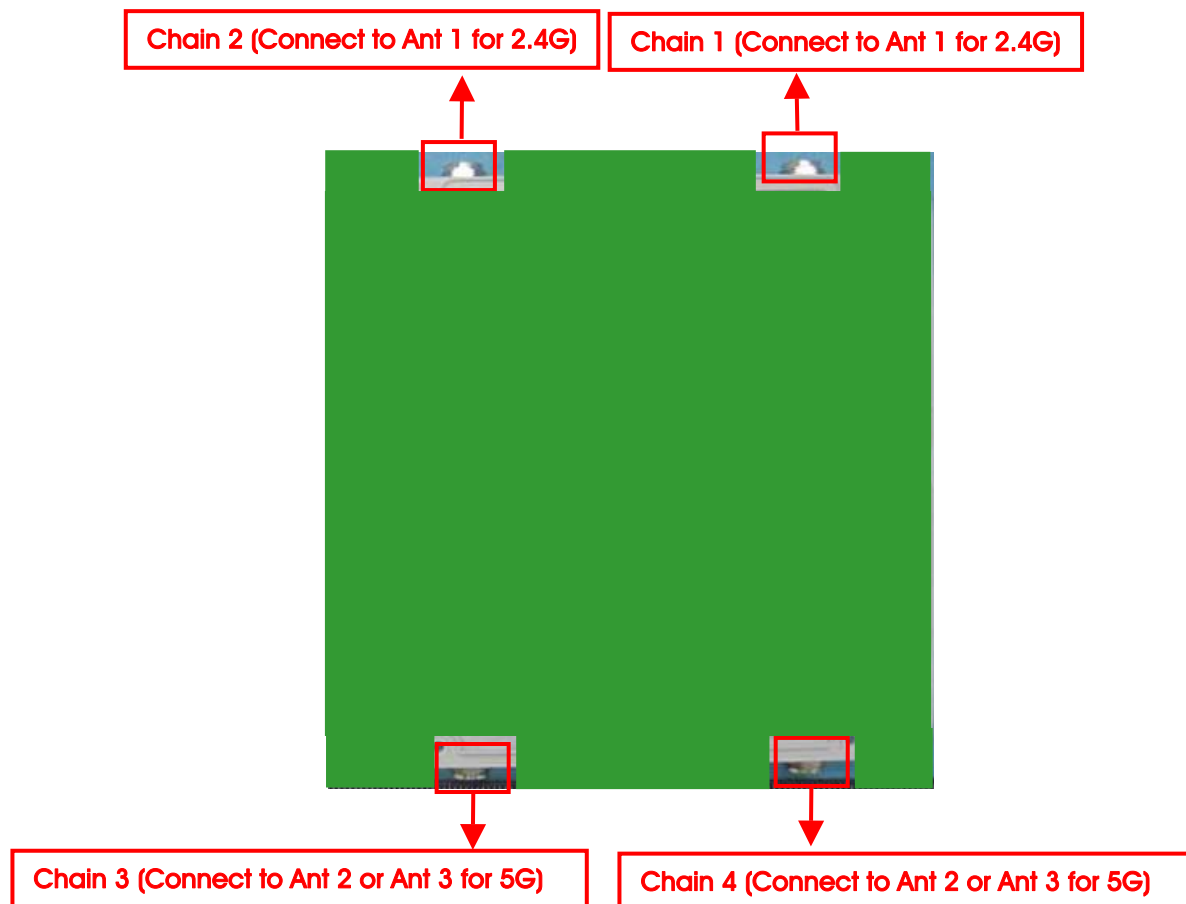

3.4. Table for Carrier Frequencies

For 2.4GHz Band

There is one bandwidth system.

For 20MHz bandwidth systems, use Channel 1 ~Channel 11.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11ac VHT20	MCS0/Nss1	1/6/11	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Power Spectral Density	11ac VHT20	MCS0/Nss1	1/6/11	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
6dB Spectrum Bandwidth	11ac VHT20	MCS0/Nss1	1/6/11	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11ac VHT20	MCS0/Nss1	1/6/11	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	11ac VHT20	MCS0/Nss1	1/6/11	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1

Note 1: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac in 2.4GHz and 5GHz, Beamforming mode and non-beamforming mode has been test and record in this test report.

Note 2: VHT20 covers HT20 in 2.4GHz, due to same modulation.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT standing with Adapter

For Radiated Emission test <Below 1GHz>:

Mode 1. EUT standing with Adapter

Mode 2. EUT standing with PoE (9001GO)

Mode 3. EUT standing with PoE (PD-9001GR/AT/AC)

Mode 3 is the worst case, so it was selected to record in this test report.

For Radiated Emission test <Above 1GHz>:

Mode 1. EUT standing with Ant. 1 (2.4GHz)

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E6430	DoC
Adapter	DVE	DSA-24PFD-15 FUK 120200	N/A

For Test Site No: 03CH01-CB<Below 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	M1340	E2K4965AGNM
NB	DELL	E6430	DoC
NB	DELL	D420	E2KWM3945ABG
PoE	Power Dsine	PD-9001GR/AT/AC	N/A

<For Non-Beamforming Mode>

For Test Site No: 03CH01-CB (Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	E2K4965AGNM

<For Beamforming Mode>

For Test Site No: 03CH01-CB (Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	E2K4965AGNM
NB	DELL	M1340	E2K4965AGNM
WLAN ac Dongle	Netgear	A6200	PY31220200

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6220	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Non-Beamforming Mode>

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	Putty ver 0.62.0.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0/Nss1 VHT20	62	91	64

Power Parameters of IEEE 802.11b/g

Test Software Version	Putty ver 0.62.0.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	90	96	88
IEEE 802.11g	74	94	70

<For Beamforming Mode>

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	Putty ver 0.62.0.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0/Nss1 VHT20	51	89	50

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

3.10. Duty Cycle

For non-beamforming mode:


Band	Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
2.4G	802.11ac MCS0/Nss1 VHT20	1.923	2.003	96.01%	0.18	0.52
	802.11b	12.435	12.467	99.74%	0.01	0.01
	802.11g	2.059	2.139	96.26%	0.17	0.49

For beamforming mode:

Band	Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
2.4G	802.11ac MCS0/Nss1 VHT20	3.820	4.97	76.86%	1.14	0.26

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

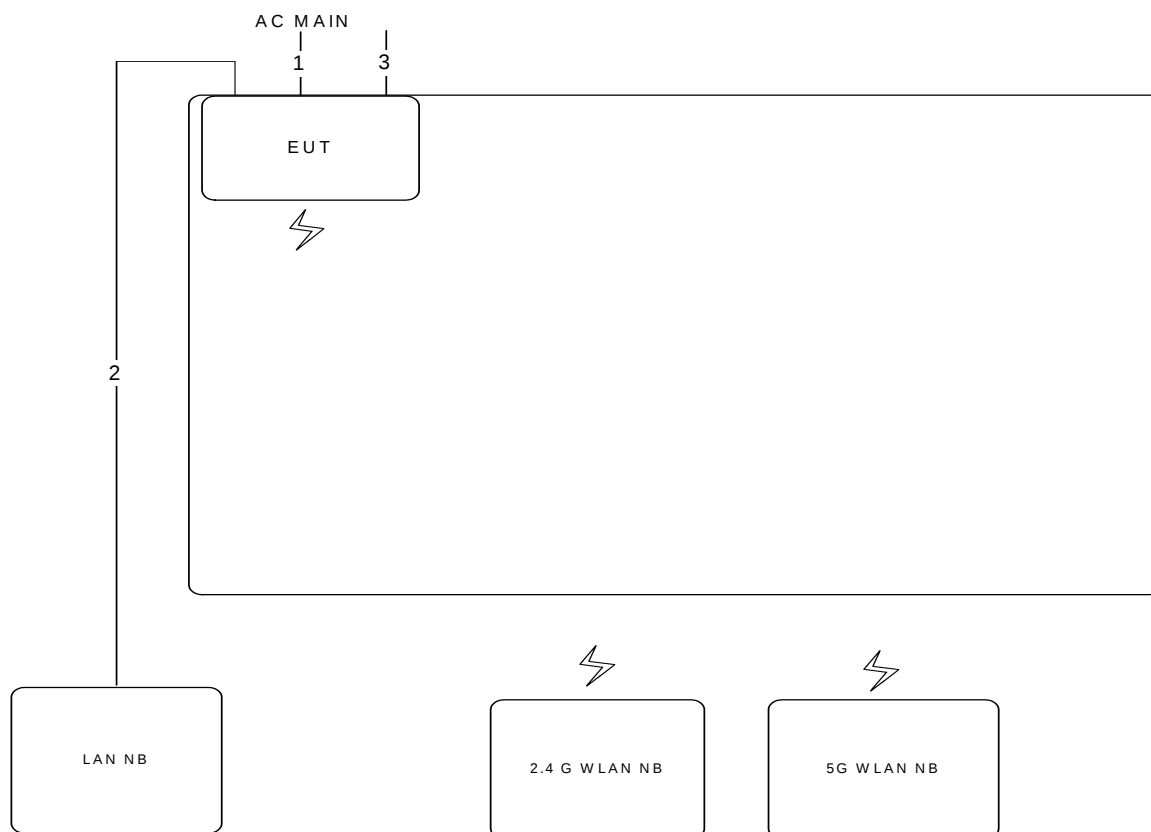

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	Ground cable	No	1.8m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

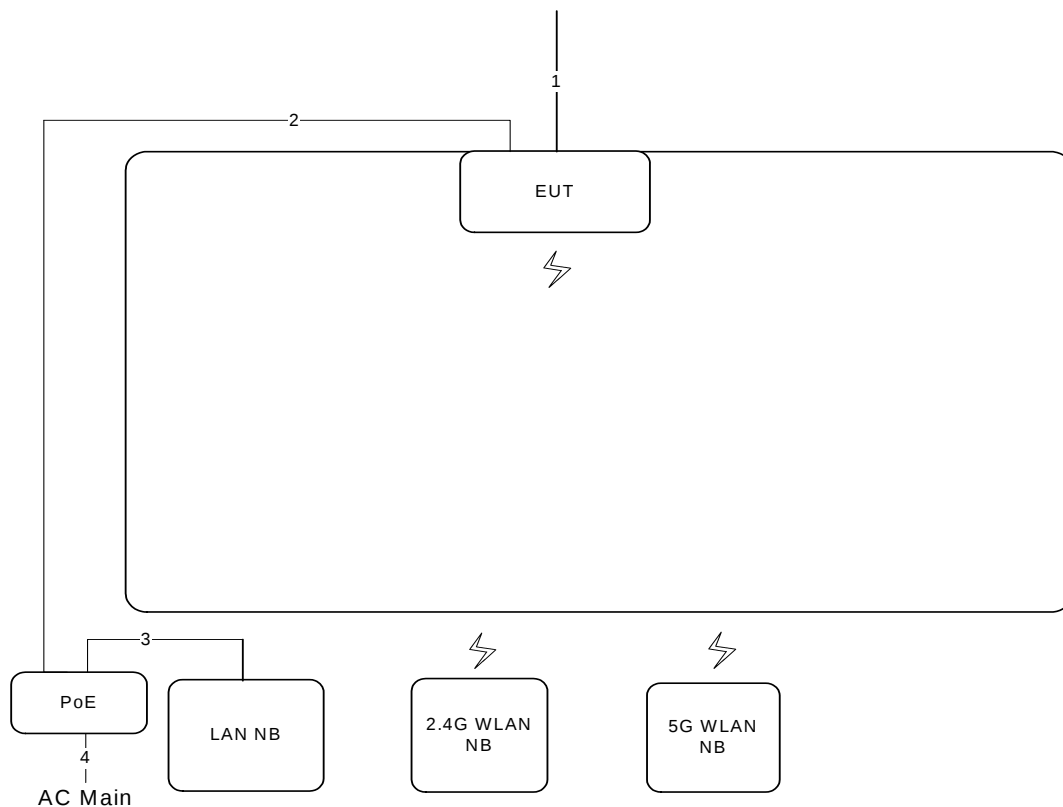

Item	Connection	Shield	Length
1	Ground cable	No	1.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m
4	Power cable	No	2m



Test Configuration: above 1GHz
<For Non-Beamforming Mode>

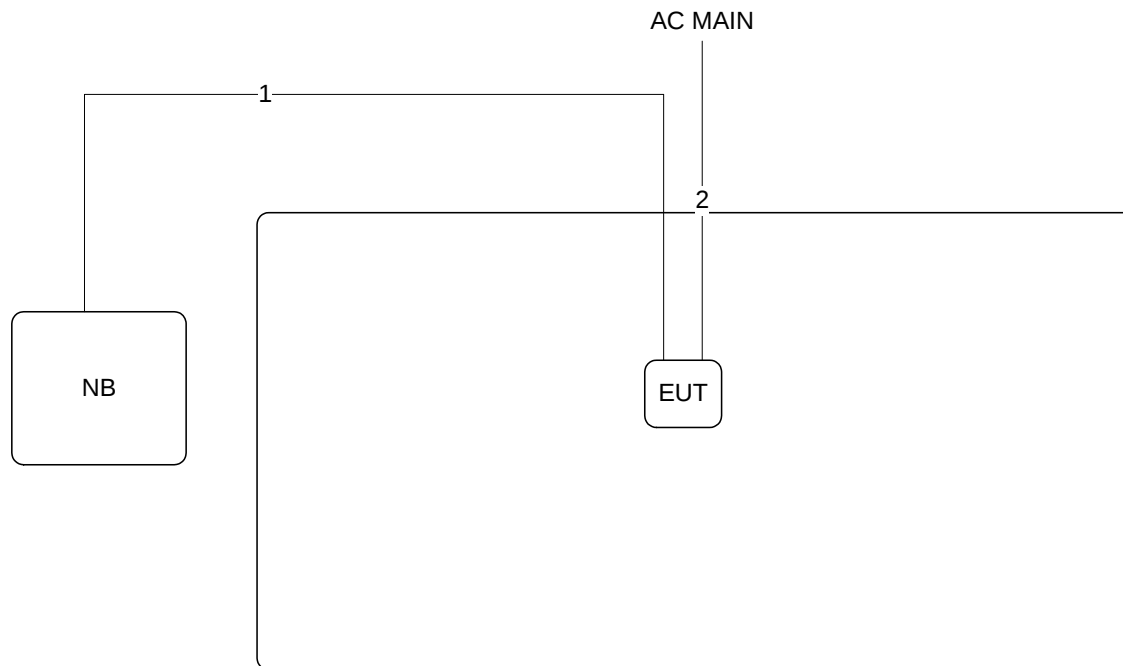

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

Test Configuration: above 1GHz

<For Beamforming Mode>

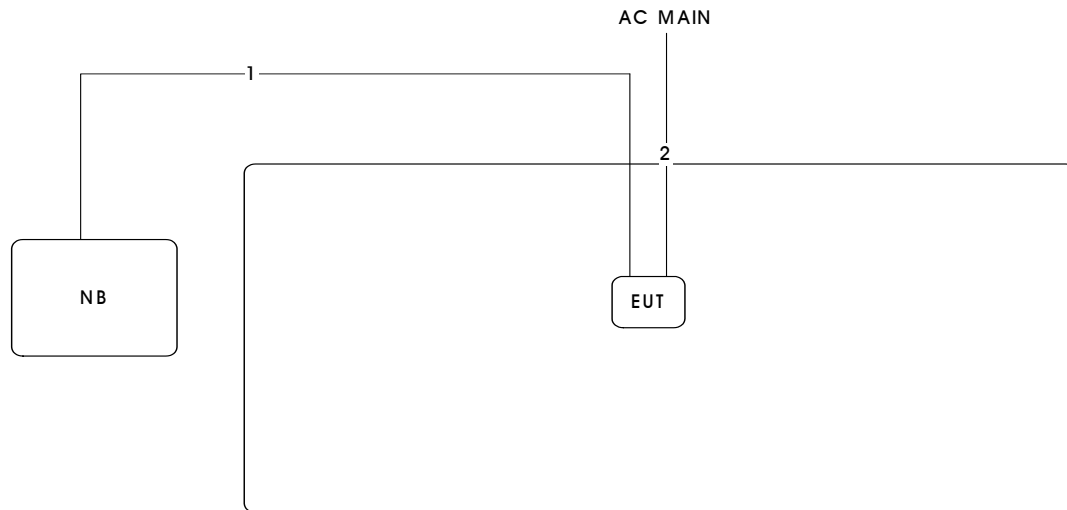

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

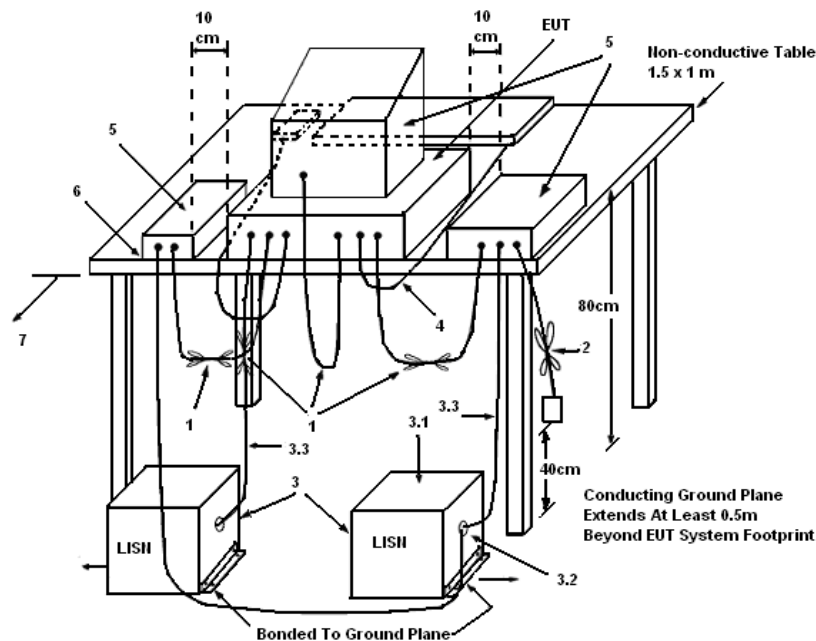

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	55%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link		

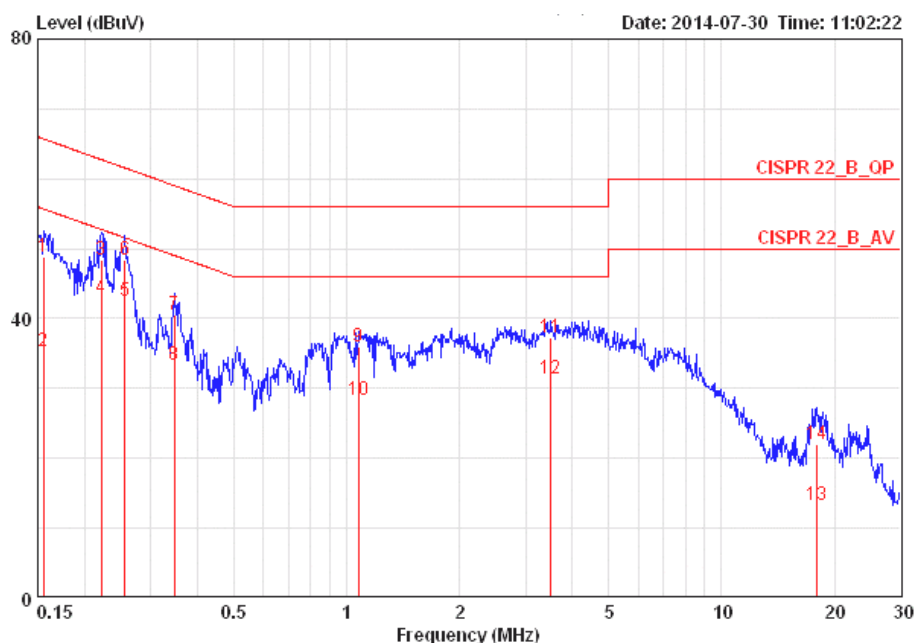

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.15567	48.81	-16.88	65.69	0.10	48.55	0.16	LINE	QP
2	0.15567	35.40	-20.29	55.69	0.10	35.14	0.16	LINE	AVERAGE
3	0.22201	48.34	-14.41	62.74	0.10	48.07	0.17	LINE	QP
4	0.22201	42.97	-9.78	52.74	0.10	42.70	0.17	LINE	AVERAGE
5	0.25615	42.51	-9.04	51.56	0.10	42.24	0.17	LINE	AVERAGE
6	0.25615	48.37	-13.18	61.56	0.10	48.10	0.17	LINE	QP
7	0.34646	40.45	-18.60	59.05	0.10	40.17	0.18	LINE	QP
8	0.34646	33.25	-15.80	49.05	0.10	32.97	0.18	LINE	AVERAGE
9	1.077	35.95	-20.05	56.00	0.13	35.61	0.21	LINE	QP
10	1.077	28.31	-17.69	46.00	0.13	27.97	0.21	LINE	AVERAGE
11	3.509	37.27	-18.73	56.00	0.20	36.78	0.29	LINE	QP
12	3.509	31.48	-14.52	46.00	0.20	30.99	0.29	LINE	AVERAGE
13	17.944	13.38	-36.62	50.00	0.46	12.43	0.49	LINE	AVERAGE
14	17.944	22.01	-37.99	60.00	0.46	21.06	0.49	LINE	QP

Temperature	24°C	Humidity	55%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link		

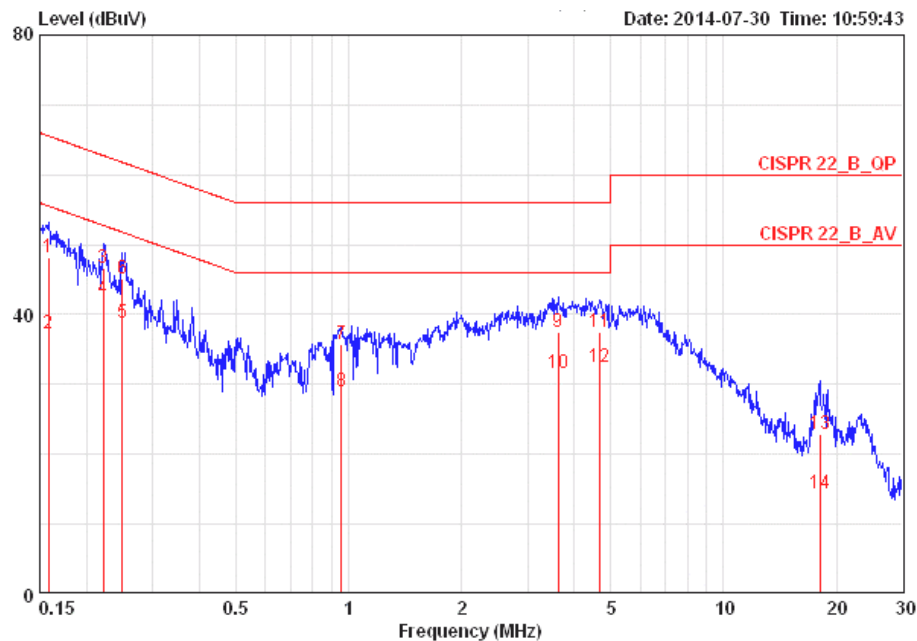

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.15816	48.24	-17.32	65.56	0.09	47.99	0.16	NEUTRAL	QP
2	0.15816	37.23	-18.33	55.56	0.09	36.98	0.16	NEUTRAL	AVERAGE
3	0.22201	46.75	-16.00	62.74	0.09	46.49	0.17	NEUTRAL	QP
4	0.22201	42.34	-10.41	52.74	0.09	42.08	0.17	NEUTRAL	AVERAGE
5	0.24945	38.72	-13.06	51.78	0.09	38.46	0.17	NEUTRAL	AVERAGE
6	0.24945	45.09	-16.69	61.78	0.09	44.83	0.17	NEUTRAL	QP
7	0.95819	35.75	-20.25	56.00	0.12	35.43	0.20	NEUTRAL	QP
8	0.95819	29.02	-16.98	46.00	0.12	28.70	0.20	NEUTRAL	AVERAGE
9	3.623	37.44	-18.56	56.00	0.18	36.97	0.29	NEUTRAL	QP
10	3.623	31.71	-14.29	46.00	0.18	31.24	0.29	NEUTRAL	AVERAGE
11	4.672	37.57	-18.43	56.00	0.21	37.04	0.31	NEUTRAL	QP
12	4.672	32.52	-13.48	46.00	0.21	31.99	0.31	NEUTRAL	AVERAGE
13	18.039	22.83	-37.17	60.00	0.42	21.92	0.49	NEUTRAL	QP
14	18.039	14.30	-35.70	50.00	0.42	13.39	0.49	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

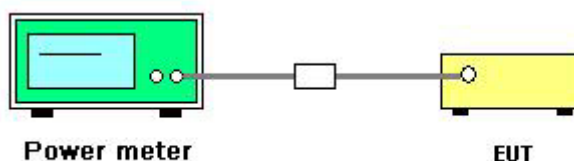

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Sep. 10, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1+Chain 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	15.38	15.49	18.45	30.00	Complies
6	2437 MHz	23.15	23.04	26.11	30.00	Complies
11	2462 MHz	15.96	15.83	18.91	30.00	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11b/g
Test Date	Sep. 10, 2014		

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	23.52	30.00	Complies
6	2437 MHz	25.29	30.00	Complies
11	2462 MHz	23.11	30.00	Complies

Configuration IEEE 802.11g / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	18.41	30.00	Complies
6	2437 MHz	24.28	30.00	Complies
11	2462 MHz	17.55	30.00	Complies

<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Sep. 10, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 +Chain 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	12.96	12.84	15.91	28.61	Complies
6	2437 MHz	22.55	22.48	25.53	28.61	Complies
11	2462 MHz	12.79	12.68	15.75	28.61	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} R_{j,k} \right\}^2}{N_{ANT}} \right] = 7.39\text{dBi} > 6\text{dBi}$, So Power Limit = 30-(7.39-6)=28.61 dBm

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

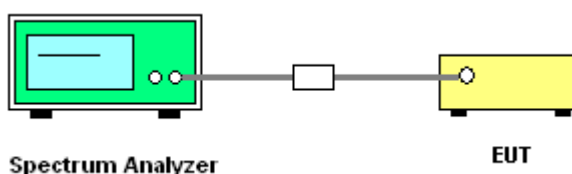

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1+Chain 2

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	-10.67	-9.54	-7.06	6.61	Complies
6	2437 MHz	-3.37	-2.25	0.24	6.61	Complies
11	2462 MHz	-10.60	-10.54	-7.56	6.61	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{tot}} \left\{ \sum_{k=1}^{N_{ant}} |S_{j,k}|^2 \right\}}{N_{ANT}} \right] = 7.39\text{dBi} > 6\text{dBi}$, So Power Density Limit = $8 - (7.39 - 6) = 6.61\text{ dBm/3kHz}$

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	0.61	8.00	Complies
6	2437 MHz	1.39	8.00	Complies
11	2462 MHz	-0.61	8.00	Complies


Configuration IEEE 802.11g / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-7.06	8.00	Complies
6	2437 MHz	-0.86	8.00	Complies
11	2462 MHz	-8.64	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

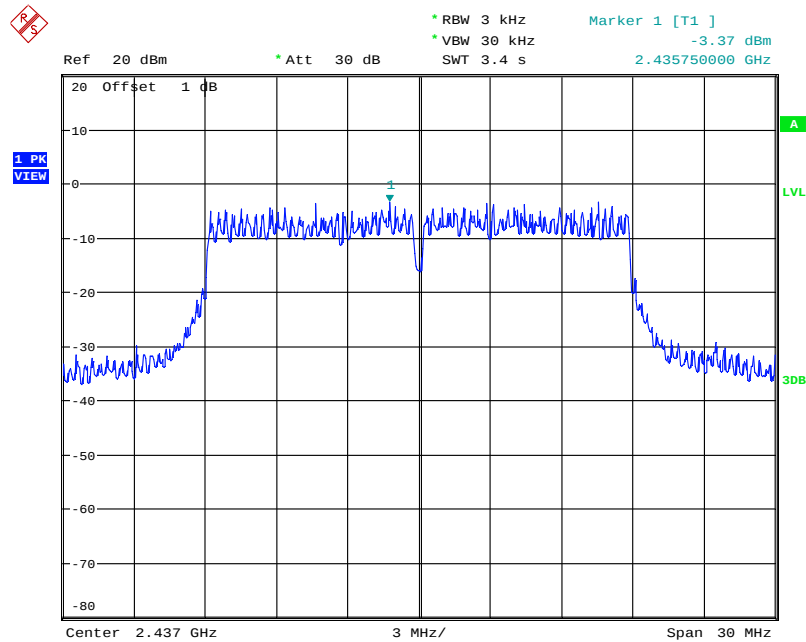


Date: 10.SEP.2014 11:51:58

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

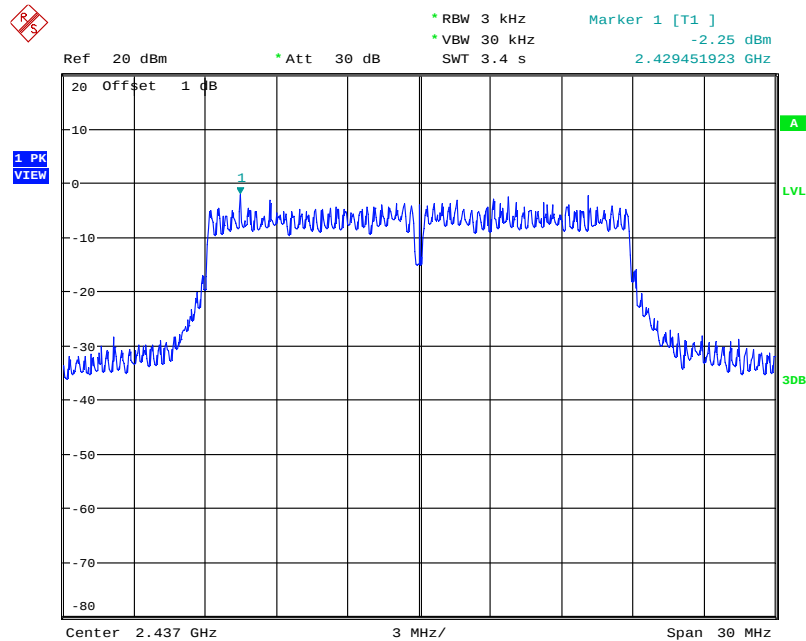


Date: 10.SEP.2014 11:51:20

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

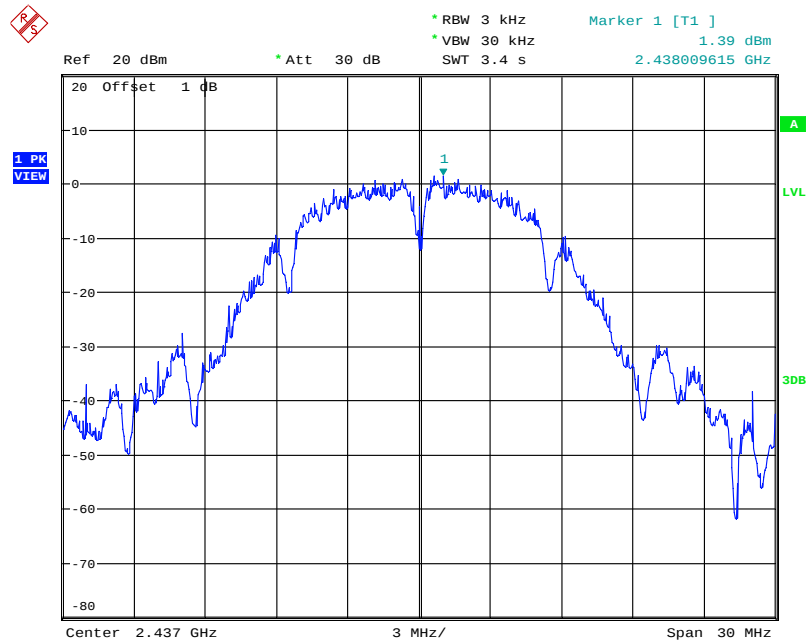

Date: 10.SEP.2014 11:41:11

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

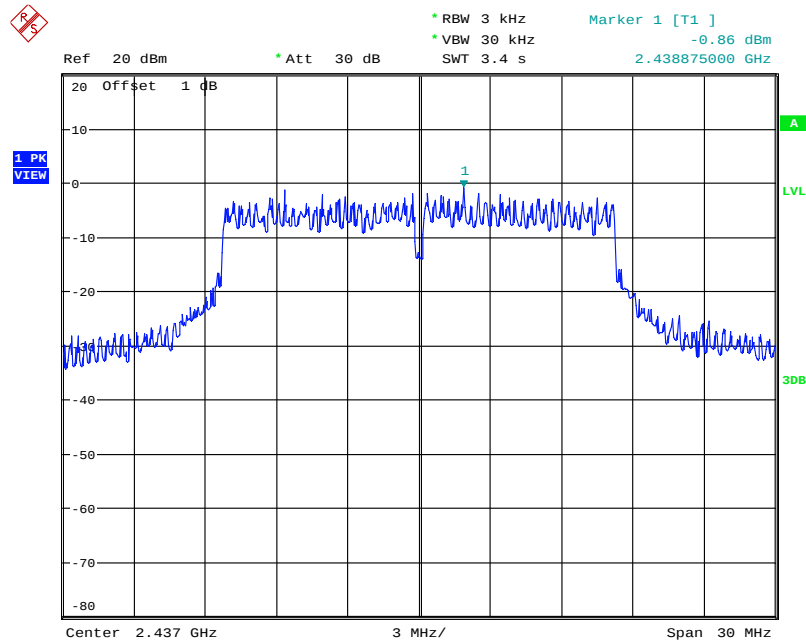

Date: 10.SEP.2014 11:43:50

<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1+Chain 2


Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	-12.72	-12.83	-9.76	6.61	Complies
6	2437 MHz	-5.31	-4.95	-2.12	6.61	Complies
11	2462 MHz	-13.46	-13.55	-10.49	6.61	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{RX}} \left\{ \sum_{k=1}^{N_{LUT}} S_{j,k} \right\}^2}{N_{ANT}} \right] = 7.39\text{dBi} > 6\text{dBi}$, So Power Density Limit = $8 - (7.39 - 6) = 6.61\text{ dBm/3kHz}$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

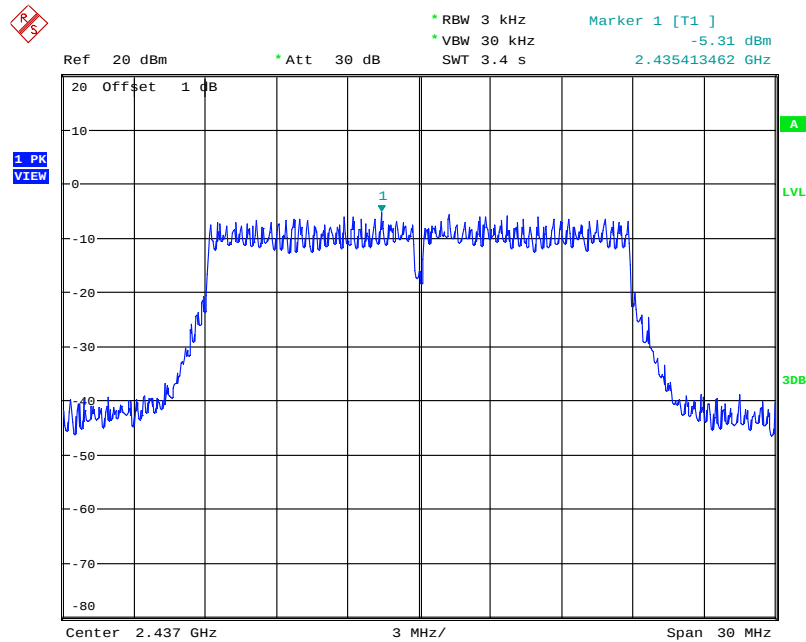

Date: 10.SEP.2014 16:50:47

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

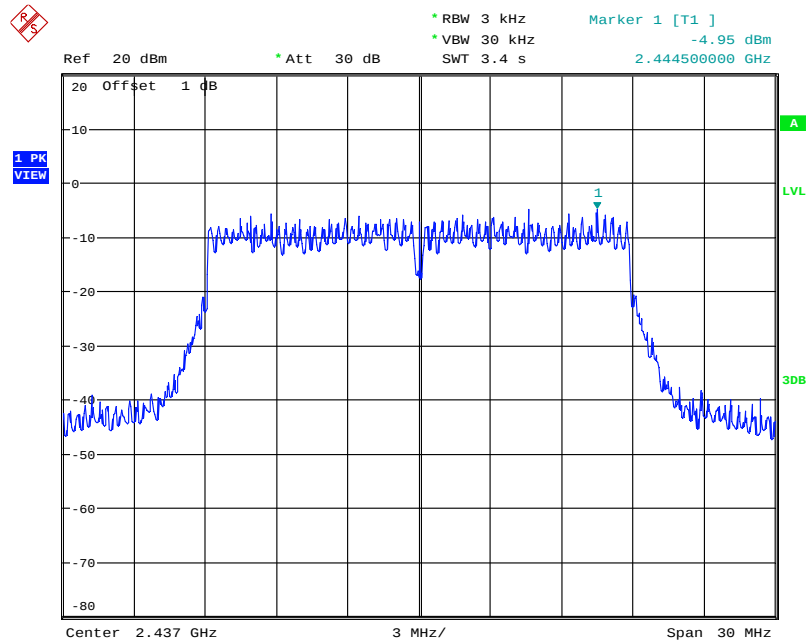

Date: 10.SEP.2014 16:50:10

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.08	17.56	500	Complies
6	2437 MHz	16.66	17.82	500	Complies
11	2462 MHz	16.08	17.62	500	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.01	11.98	500	Complies
6	2437 MHz	9.03	12.50	500	Complies
11	2462 MHz	8.58	11.79	500	Complies


Configuration IEEE 802.11g / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.34	16.47	500	Complies
6	2437 MHz	16.34	17.62	500	Complies
11	2462 MHz	16.34	16.53	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2

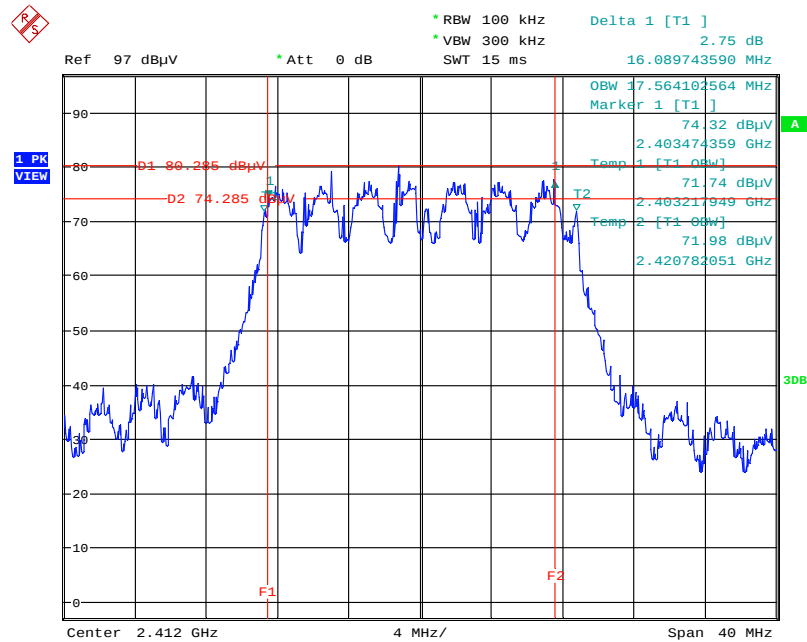


Date: 10.SEP.2014 12:01:46

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1

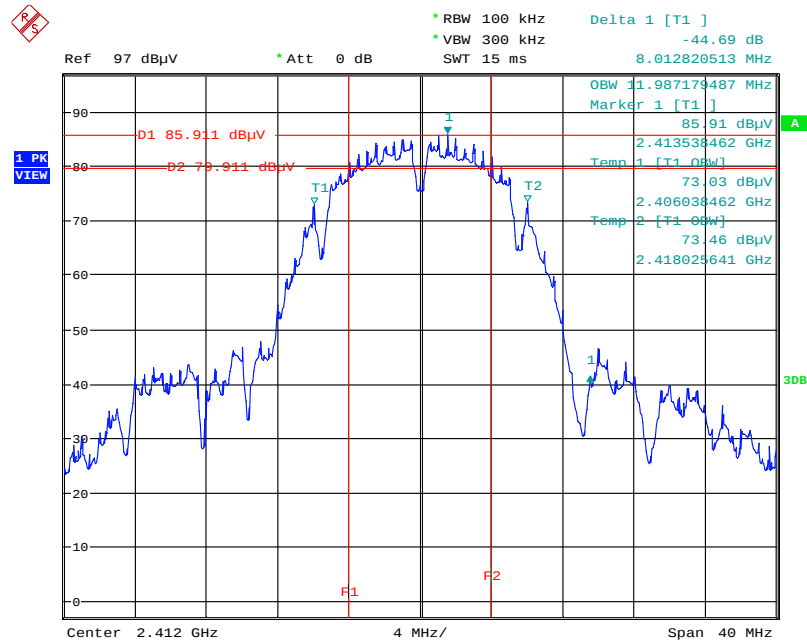

Date: 10.SEP.2014 11:56:29

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1

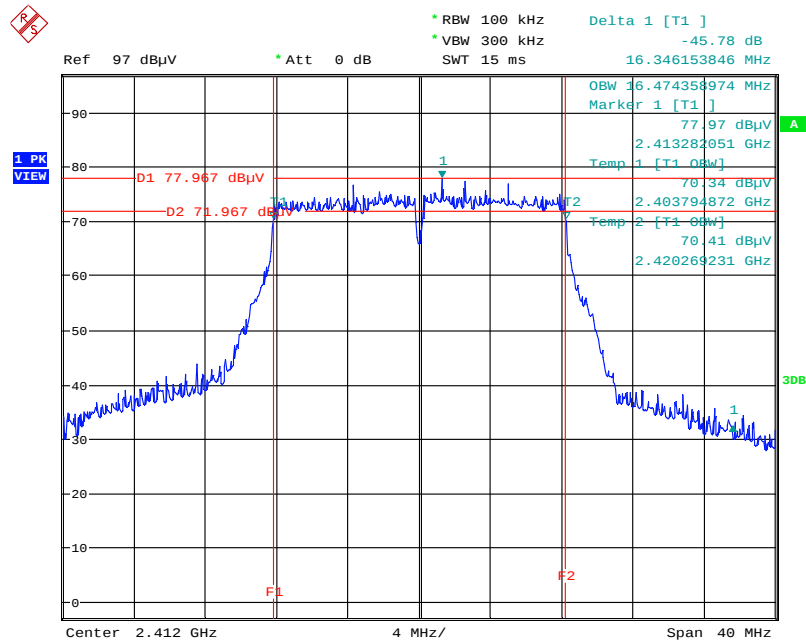

Date: 10.SEP.2014 11:58:53


<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.56	17.62	500	Complies
6	2437 MHz	16.34	17.69	500	Complies
11	2462 MHz	17.05	17.69	500	Complies

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2

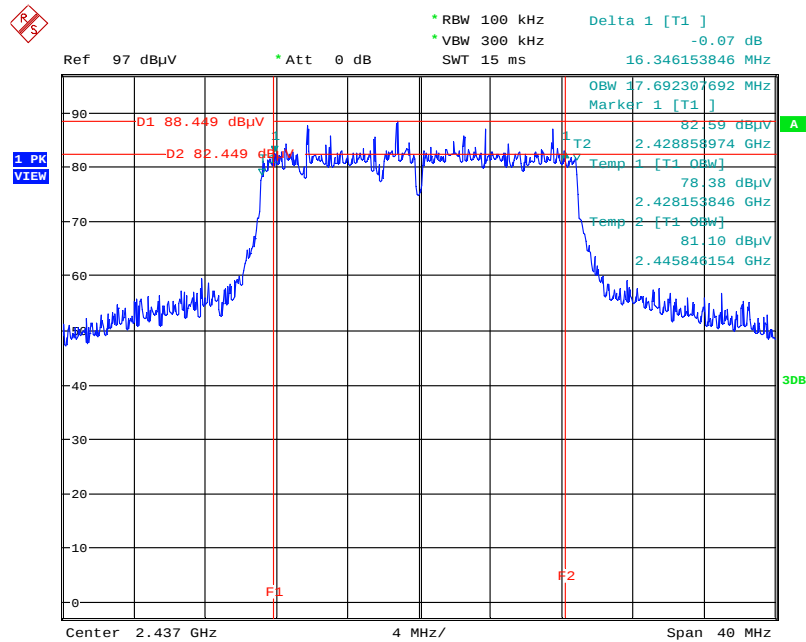

Date: 10.SEP.2014 16:45:06

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

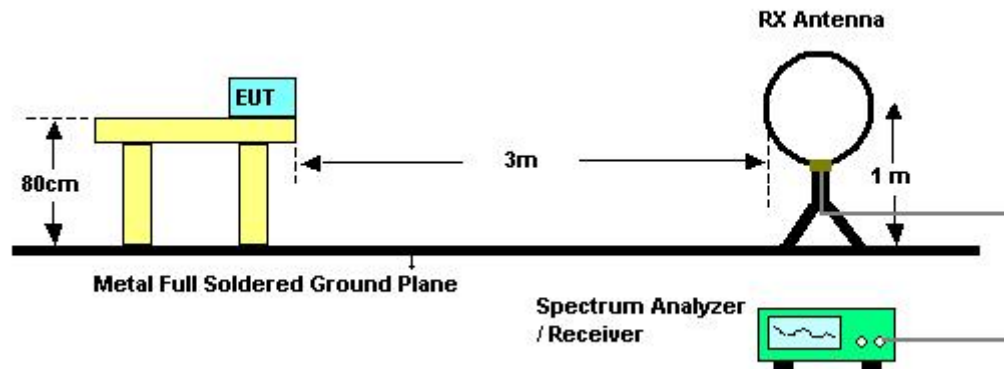

For Radiated Emissions: 30MHz~1GHz

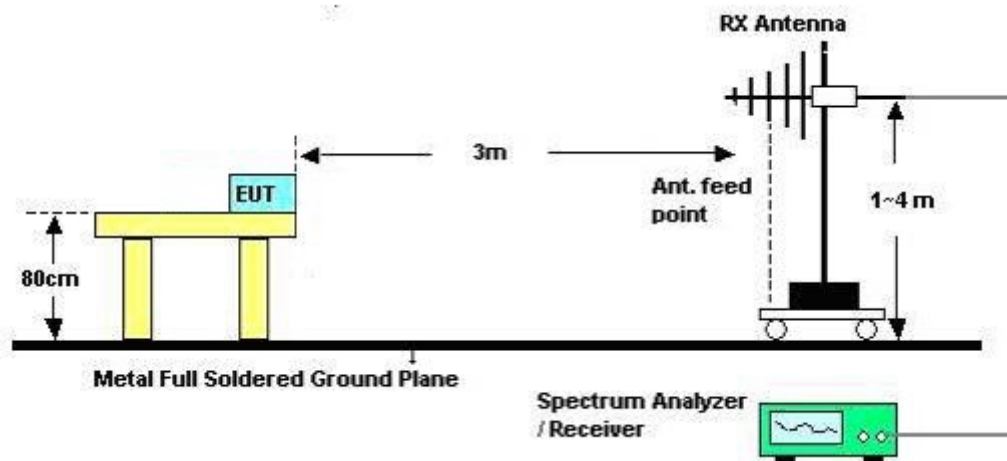

For Radiated Emissions: Above 1GHz

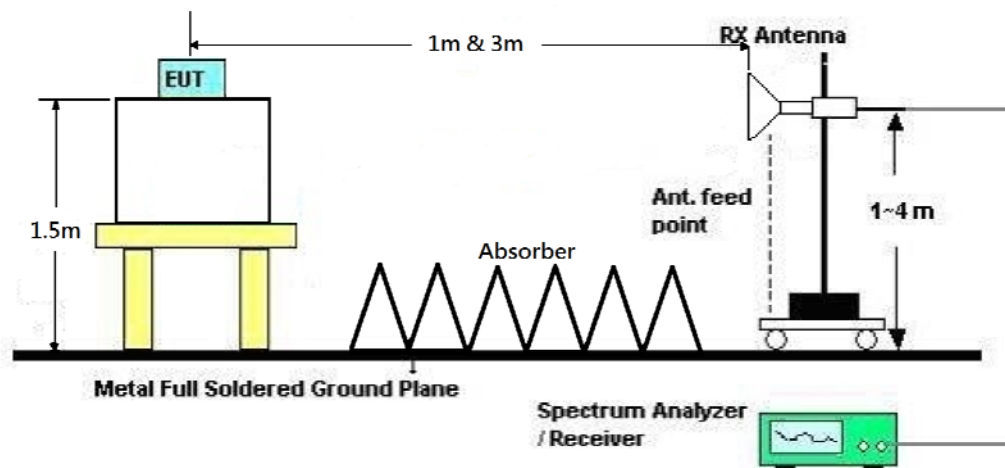

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	Normal Link
Test Date	Aug. 06, 2014	Test Mode	Mode 3

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	Normal Link
Test Mode	Mode 3		

Horizontal

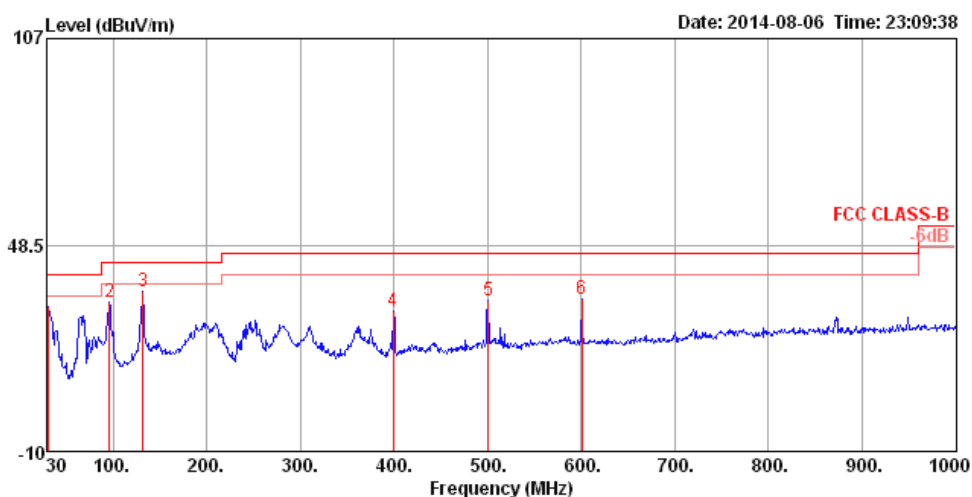

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	31.13	40.00	-8.87	44.32	0.64	17.98	31.81	200	34	HORIZONTAL Peak
2	95.96	32.29	43.50	-11.21	52.99	1.16	9.72	31.58	200	162	HORIZONTAL Peak
3	131.85	35.54	43.50	-7.96	54.22	1.37	11.51	31.56	200	158	HORIZONTAL Peak
4	399.57	29.91	46.00	-16.09	43.02	2.49	15.86	31.46	100	164	HORIZONTAL Peak
5	500.45	32.69	46.00	-13.31	44.36	2.82	16.92	31.41	200	212	HORIZONTAL Peak
6	600.36	32.99	46.00	-13.01	42.66	3.12	18.45	31.24	100	198	HORIZONTAL Peak

Vertical

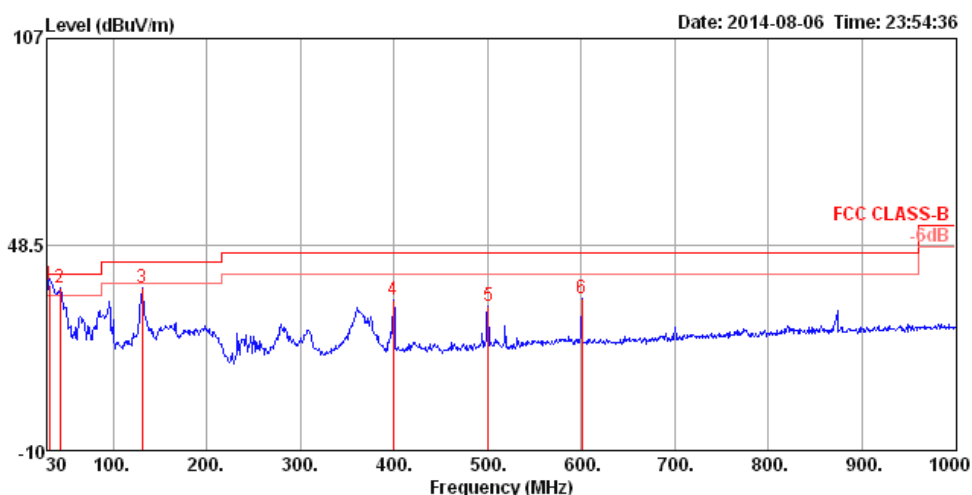

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	31.94	36.86	40.00	-3.14	51.13	0.66	16.91	31.84	100	180	VERTICAL	QP
2	43.58	36.40	40.00	-3.60	57.21	0.78	10.25	31.84	100	266	VERTICAL	QP
3	130.88	36.17	43.50	-7.33	54.79	1.36	11.59	31.57	125	142	VERTICAL	Peak
4	399.57	32.91	46.00	-13.09	46.02	2.49	15.86	31.46	150	256	VERTICAL	Peak
5	500.45	31.00	46.00	-15.00	42.67	2.82	16.92	31.41	100	198	VERTICAL	Peak
6	600.36	33.30	46.00	-12.70	42.97	3.12	18.45	31.24	200	192	VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Non-Beamforming Mode>

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4825.34	43.78	74.00	-30.22	41.83	3.31	33.56	34.92	Peak	100	230	HORIZONTAL
2	4828.88	30.53	54.00	-23.47	28.58	3.31	33.56	34.92	Average	100	230	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.16	44.16	74.00	-29.84	42.21	3.31	33.56	34.92	Peak	100	145	VERTICAL
2	4828.92	30.70	54.00	-23.30	28.75	3.31	33.56	34.92	Average	100	145	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4872.72	30.99	54.00	-23.01	28.92	3.33	33.66	34.92	Average	100	41 HORIZONTAL
2	4872.72	43.89	74.00	-30.11	41.82	3.33	33.66	34.92	Peak	100	41 HORIZONTAL
3	7307.56	47.31	74.00	-26.69	41.80	4.06	36.64	35.19	Peak	100	102 HORIZONTAL
4	7308.32	34.19	54.00	-19.81	28.68	4.06	36.64	35.19	Average	100	102 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4874.04	31.27	54.00	-22.73	29.20	3.33	33.66	34.92	Average	100	310 VERTICAL
2	4877.52	44.35	74.00	-29.65	42.28	3.33	33.66	34.92	Peak	100	310 VERTICAL
3	7307.86	47.08	74.00	-26.92	41.57	4.06	36.64	35.19	Peak	100	207 VERTICAL
4	7314.02	34.22	54.00	-19.78	28.71	4.06	36.64	35.19	Average	100	207 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4922.10	44.42	74.00	-29.58	42.22	3.35	33.76	34.91	Peak	100	229	HORIZONTAL
2	4925.38	31.28	54.00	-22.72	29.08	3.35	33.76	34.91	Average	100	229	HORIZONTAL
3	7381.82	48.29	74.00	-25.71	42.63	4.06	36.81	35.21	Peak	100	5	HORIZONTAL
4	7385.68	34.71	54.00	-19.29	29.01	4.06	36.85	35.21	Average	100	5	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4925.20	31.68	54.00	-22.32	29.48	3.35	33.76	34.91	Average	100	46	VERTICAL
2	4926.26	44.60	74.00	-29.40	42.40	3.35	33.76	34.91	Peak	100	46	VERTICAL
3	7386.74	34.71	54.00	-19.29	29.01	4.06	36.85	35.21	Average	100	166	VERTICAL
4	7390.36	47.84	74.00	-26.16	42.14	4.06	36.85	35.21	Peak	100	166	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 1 / Chain 1
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4819.40	44.19	74.00	-29.81	42.24	3.31	33.56	34.92	Peak	100	296	HORIZONTAL
2	4823.94	31.11	54.00	-22.89	29.16	3.31	33.56	34.92	Average	100	296	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.00	35.95	54.00	-18.05	34.00	3.31	33.56	34.92	Average	100	87	VERTICAL
2	4824.10	45.58	74.00	-28.42	43.63	3.31	33.56	34.92	Peak	100	87	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 6 / Chain 1
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.96	32.14	54.00	-21.86	30.07	3.33	33.66	34.92	Average	100	216	HORIZONTAL
2	4878.70	44.06	74.00	-29.94	41.99	3.33	33.66	34.92	Peak	100	216	HORIZONTAL
3	7309.08	33.95	54.00	-20.05	28.44	4.06	36.64	35.19	Average	100	261	HORIZONTAL
4	7311.86	46.71	74.00	-27.29	41.20	4.06	36.64	35.19	Peak	100	261	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.80	44.66	74.00	-29.34	42.59	3.33	33.66	34.92	Peak	100	84	VERTICAL
2	4874.00	35.36	54.00	-18.64	33.29	3.33	33.66	34.92	Average	100	84	VERTICAL
3	7310.54	34.17	54.00	-19.83	28.66	4.06	36.64	35.19	Average	100	200	VERTICAL
4	7315.10	46.91	74.00	-27.09	41.40	4.06	36.64	35.19	Peak	100	200	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 11 / Chain 1
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4924.00	31.74	54.00	-22.26	29.54	3.35	33.76	34.91	Average	100	293	HORIZONTAL
2	4924.72	44.31	74.00	-29.69	42.11	3.35	33.76	34.91	Peak	100	293	HORIZONTAL
3	7383.92	47.69	74.00	-26.31	41.99	4.06	36.85	35.21	Peak	100	100	HORIZONTAL
4	7384.82	34.67	54.00	-19.33	28.97	4.06	36.85	35.21	Average	100	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.84	45.79	74.00	-28.21	43.59	3.35	33.76	34.91	Peak	100	74	VERTICAL
2	4924.02	37.37	54.00	-16.63	35.17	3.35	33.76	34.91	Average	100	74	VERTICAL
3	7382.06	34.46	54.00	-19.54	28.80	4.06	36.81	35.21	Average	100	186	VERTICAL
4	7390.18	47.77	74.00	-26.23	42.07	4.06	36.85	35.21	Peak	100	186	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 1 / Chain 1
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4819.68	44.17	74.00	-29.83	42.22	3.31	33.56	34.92	Peak	100	322	HORIZONTAL
2	4828.78	30.76	54.00	-23.24	28.81	3.31	33.56	34.92	Average	100	322	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4819.64	44.16	74.00	-29.84	42.21	3.31	33.56	34.92	Peak	100	205	VERTICAL
2	4825.90	30.47	54.00	-23.53	28.52	3.31	33.56	34.92	Average	100	205	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 6 / Chain 1
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4876.28	43.57	74.00	-30.43	41.50	3.33	33.66	34.92	Peak	100	54	HORIZONTAL
2	4878.80	31.10	54.00	-22.90	29.03	3.33	33.66	34.92	Average	100	54	HORIZONTAL
3	7306.90	34.15	54.00	-19.85	28.64	4.06	36.64	35.19	Average	100	282	HORIZONTAL
4	7312.14	47.18	74.00	-26.82	41.67	4.06	36.64	35.19	Peak	100	282	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4870.52	44.41	74.00	-29.59	42.34	3.33	33.66	34.92	Peak	100	177	VERTICAL
2	4878.40	31.20	54.00	-22.80	29.13	3.33	33.66	34.92	Average	100	177	VERTICAL
3	7306.98	47.13	74.00	-26.87	41.62	4.06	36.64	35.19	Peak	100	334	VERTICAL
4	7313.60	34.27	54.00	-19.73	28.76	4.06	36.64	35.19	Average	100	334	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 11 / Chain 1
Test Date	Aug. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4921.40	44.29	74.00	-29.71	42.09	3.35	33.76	34.91	Peak	100	260	HORIZONTAL
2	4921.74	31.27	54.00	-22.73	29.07	3.35	33.76	34.91	Average	100	260	HORIZONTAL
3	7384.86	47.09	74.00	-26.91	41.39	4.06	36.85	35.21	Peak	100	35	HORIZONTAL
4	7387.08	34.49	54.00	-19.51	28.79	4.06	36.85	35.21	Average	100	35	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.62	44.16	74.00	-29.84	41.96	3.35	33.76	34.91	Peak	100	234	VERTICAL
2	4927.08	31.24	54.00	-22.76	29.04	3.35	33.76	34.91	Average	100	234	VERTICAL
3	7381.76	34.50	54.00	-19.50	28.84	4.06	36.81	35.21	Average	100	130	VERTICAL
4	7387.38	48.69	74.00	-25.31	42.99	4.06	36.85	35.21	Peak	100	130	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

<For Beamforming Mode>

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2
Test Date	Aug. 14, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4827.80	44.69	74.00	-29.31	42.74	3.31	33.56	34.92	Peak	100	314	HORIZONTAL
2	4829.60	32.32	54.00	-21.68	30.37	3.31	33.56	34.92	Average	100	314	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4821.80	44.69	74.00	-29.31	42.74	3.31	33.56	34.92	Peak	100	53	VERTICAL
2	4827.76	31.35	54.00	-22.65	29.40	3.31	33.56	34.92	Average	100	53	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2
Test Date	Aug. 14, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4873.10	44.98	74.00	-29.02	42.91	3.33	33.66	34.92	Peak	100	125	HORIZONTAL
2	4874.10	32.39	54.00	-21.61	30.32	3.33	33.66	34.92	Average	100	125	HORIZONTAL
3	7308.96	35.27	54.00	-18.73	29.76	4.06	36.64	35.19	Average	100	304	HORIZONTAL
4	7311.74	48.45	74.00	-25.55	42.94	4.06	36.64	35.19	Peak	100	304	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4873.94	39.99	54.00	-14.01	37.92	3.33	33.66	34.92	Average	100	77	VERTICAL
2	4873.98	45.12	74.00	-28.88	43.05	3.33	33.66	34.92	Peak	100	77	VERTICAL
3	7309.62	35.28	54.00	-18.72	29.77	4.06	36.64	35.19	Average	100	232	VERTICAL
4	7313.04	48.50	74.00	-25.50	42.99	4.06	36.64	35.19	Peak	100	232	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2
Test Date	Aug. 14, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.32	32.21	54.00	-21.79	30.01	3.35	33.76	34.91	Average	100	226	HORIZONTAL
2	4924.28	45.77	74.00	-28.23	43.57	3.35	33.76	34.91	Peak	100	226	HORIZONTAL
3	7381.56	35.51	54.00	-18.49	29.85	4.06	36.81	35.21	Average	100	325	HORIZONTAL
4	7388.20	49.14	74.00	-24.86	43.44	4.06	36.85	35.21	Peak	100	325	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4927.00	45.54	74.00	-28.46	43.34	3.35	33.76	34.91	Peak	100	227	VERTICAL
2	4928.82	32.37	54.00	-21.63	30.17	3.35	33.76	34.91	Average	100	227	VERTICAL
3	7383.22	35.70	54.00	-18.30	30.04	4.06	36.81	35.21	Average	100	198	VERTICAL
4	7386.40	49.36	74.00	-24.64	43.66	4.06	36.85	35.21	Peak	100	198	VERTICAL

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
- The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Non-Beamforming Mode>

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2
Test date	Aug. 13, 2014		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2390.00	53.93	54.00	-0.07	23.22	2.22	28.49	0.00	Average	100	341 VERTICAL
2	2390.00	71.13	74.00	-2.87	40.42	2.22	28.49	0.00	Peak	100	341 VERTICAL
3	2410.60	103.33			72.58	2.22	28.53	0.00	Average	100	341 VERTICAL
4	2410.80	116.16			85.41	2.22	28.53	0.00	Peak	100	341 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2388.80	71.14	74.00	-2.86	40.44	2.21	28.49	0.00	Peak	100	326 VERTICAL
2	2390.00	51.84	54.00	-2.16	21.13	2.22	28.49	0.00	Average	100	326 VERTICAL
3	2445.00	109.06			78.22	2.24	28.60	0.00	Average	100	326 VERTICAL
4	2445.40	122.30			91.46	2.24	28.60	0.00	Peak	100	326 VERTICAL
5	2485.50	53.46	54.00	-0.54	22.53	2.26	28.67	0.00	Average	100	326 VERTICAL
6	2485.90	73.65	74.00	-0.35	42.72	2.26	28.67	0.00	Peak	100	326 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2463.20	102.21			71.34	2.24	28.63	0.00	Average	100	344 VERTICAL
2	2465.80	114.73			83.86	2.24	28.63	0.00	Peak	100	344 VERTICAL
3	2483.50	53.20	54.00	-0.80	22.27	2.26	28.67	0.00	Average	100	344 VERTICAL
4	2485.90	71.44	74.00	-2.56	40.51	2.26	28.67	0.00	Peak	100	344 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
Test Date	Aug. 13, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.75	54.00	-0.25	23.04	2.22	28.49	0.00	Average	100	340	VERTICAL
2	2390.00	61.84	74.00	-12.16	31.13	2.22	28.49	0.00	Peak	100	340	VERTICAL
3	2411.20	114.80			84.05	2.22	28.53	0.00	Average	100	340	VERTICAL
4	2411.20	118.93			88.18	2.22	28.53	0.00	Peak	100	340	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	47.30	54.00	-6.70	16.59	2.22	28.49	0.00	Average	100	350	VERTICAL
2	2390.00	58.07	74.00	-15.93	27.36	2.22	28.49	0.00	Peak	100	350	VERTICAL
3	2436.20	115.91			85.12	2.23	28.56	0.00	Average	100	350	VERTICAL
4	2436.20	119.71			88.92	2.23	28.56	0.00	Peak	100	350	VERTICAL
5	2483.50	49.71	54.00	-4.29	18.78	2.26	28.67	0.00	Average	100	350	VERTICAL
6	2483.90	60.86	74.00	-13.14	29.93	2.26	28.67	0.00	Peak	100	350	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2462.60	112.83			81.96	2.24	28.63	0.00	Average	100	324	VERTICAL
2	2463.00	117.30			86.43	2.24	28.63	0.00	Peak	100	324	VERTICAL
3	2483.50	53.78	54.00	-0.22	22.85	2.26	28.67	0.00	Average	100	324	VERTICAL
4	2483.50	62.11	74.00	-11.89	31.18	2.26	28.67	0.00	Peak	100	324	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1
Test Date	Aug. 13, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.66	54.00	-0.34	22.95	2.22	28.49	0.00	Average	100	339	VERTICAL
2	2390.00	72.46	74.00	-1.54	41.75	2.22	28.49	0.00	Peak	100	339	VERTICAL
3	2409.20	102.45			71.70	2.22	28.53	0.00	Average	100	339	VERTICAL
4	2410.60	115.08			84.33	2.22	28.53	0.00	Peak	100	339	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.40	69.25	74.00	-4.75	38.55	2.21	28.49	0.00	Peak	100	347	VERTICAL
2	2390.00	52.01	54.00	-1.99	21.30	2.22	28.49	0.00	Average	100	347	VERTICAL
3	2434.20	106.81			76.02	2.23	28.56	0.00	Average	100	347	VERTICAL
4	2435.00	119.72			88.93	2.23	28.56	0.00	Peak	100	347	VERTICAL
5	2483.50	53.35	54.00	-0.65	22.42	2.26	28.67	0.00	Average	100	347	VERTICAL
6	2486.25	70.58	74.00	-3.42	39.65	2.26	28.67	0.00	Peak	100	347	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2468.80	101.10			70.21	2.26	28.63	0.00	Average	100	344	VERTICAL
2	2468.80	113.76			82.87	2.26	28.63	0.00	Peak	100	344	VERTICAL
3	2483.50	53.48	54.00	-0.52	22.55	2.26	28.67	0.00	Average	100	344	VERTICAL
4	2485.90	69.75	74.00	-4.25	38.82	2.26	28.67	0.00	Peak	100	344	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Beamforming Mode>

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2
Test date	Aug. 13, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.80	70.43	74.00	-3.57	39.72	2.22	28.49	0.00	Peak	100	347	VERTICAL
2	2390.00	53.89	54.00	-0.11	23.18	2.22	28.49	0.00	Average	100	347	VERTICAL
3	2409.20	105.18			74.43	2.22	28.53	0.00	Average	100	347	VERTICAL
4	2410.20	115.00			84.25	2.22	28.53	0.00	Peak	100	347	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2385.20	72.68	74.00	-1.32	42.01	2.21	28.46	0.00	Peak	100	31	VERTICAL
2	2390.00	53.90	54.00	-0.10	23.19	2.22	28.49	0.00	Average	100	31	VERTICAL
3	2429.00	123.20			92.41	2.23	28.56	0.00	Peak	100	31	VERTICAL
4	2433.80	113.14			82.35	2.23	28.56	0.00	Average	100	31	VERTICAL
5	2483.50	53.73	54.00	-0.27	22.80	2.26	28.67	0.00	Average	100	31	VERTICAL
6	2483.90	73.98	74.00	-0.02	43.05	2.26	28.67	0.00	Peak	100	31	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2459.80	113.01			82.14	2.24	28.63	0.00	Peak	100	340	VERTICAL
2	2460.20	103.25			72.38	2.24	28.63	0.00	Average	100	340	VERTICAL
3	2483.50	53.50	54.00	-0.50	22.57	2.26	28.67	0.00	Average	100	340	VERTICAL
4	2483.50	67.54	74.00	-6.46	36.61	2.26	28.67	0.00	Peak	100	340	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<For Non-Beamforming Mode>:


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

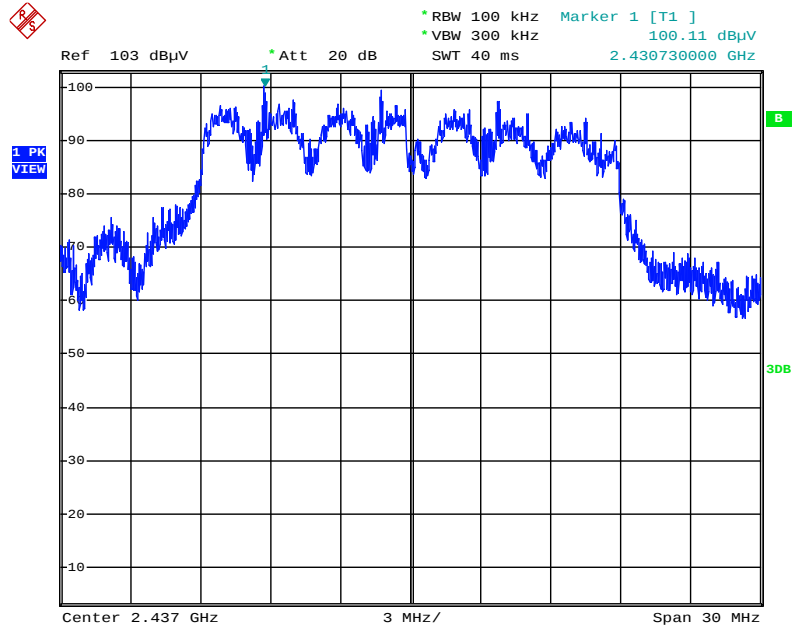


Date: 18.AUG.2014 18:11:43

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

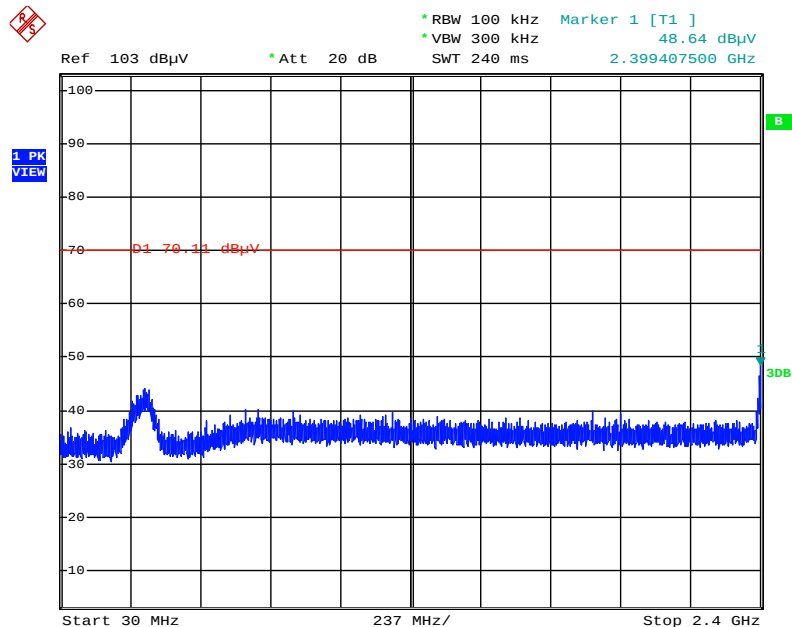


Date: 18.AUG.2014 18:13:24

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

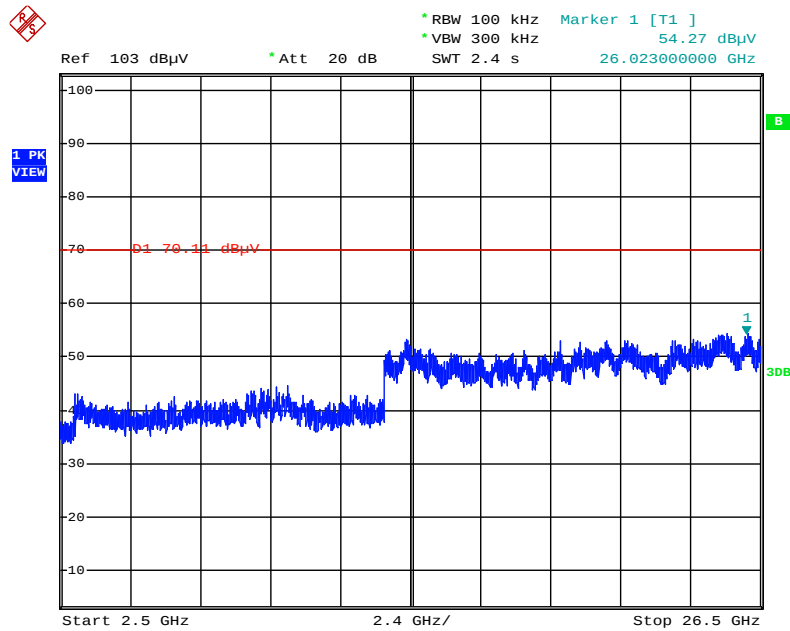


Date: 18.AUG.2014 18:14:27

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

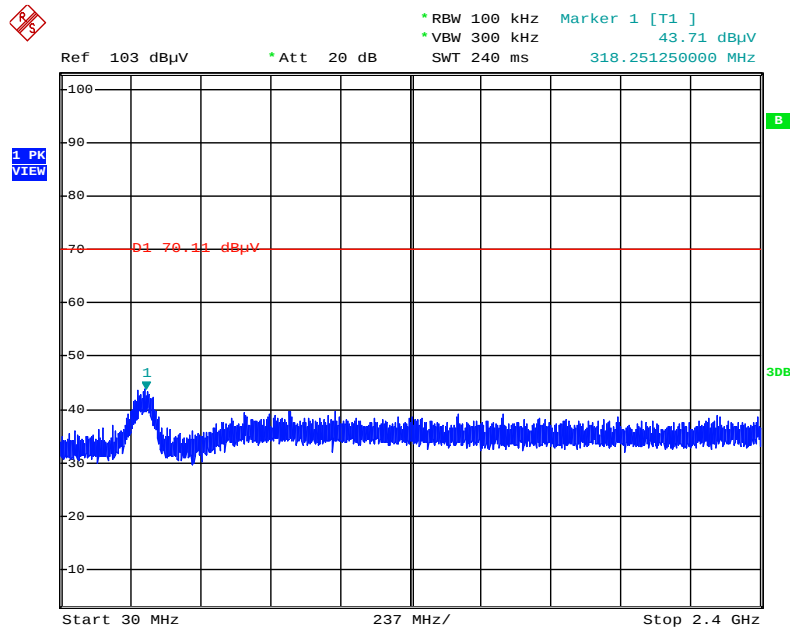


Date: 18.AUG.2014 18:15:33

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

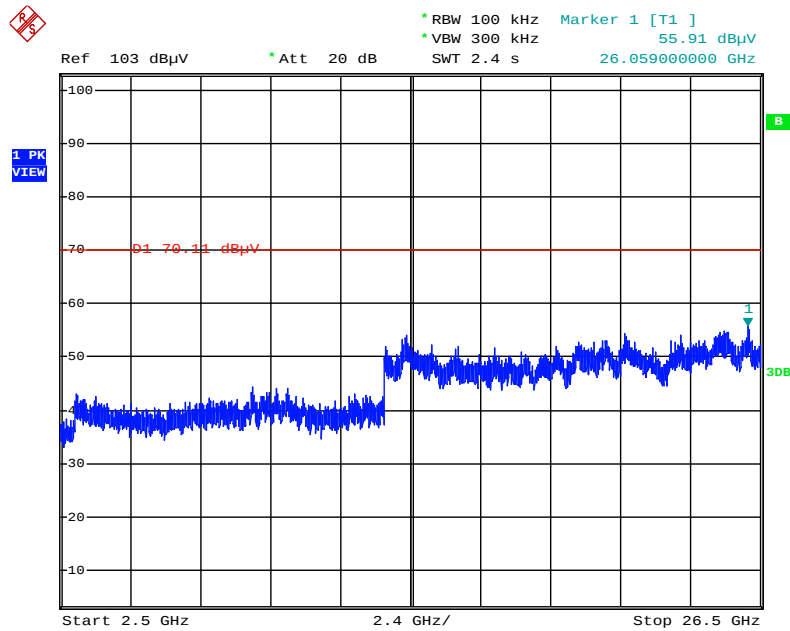


Date: 18.AUG.2014 18:15:01

Plot on Configuration IEEE 802.11b / Reference Level

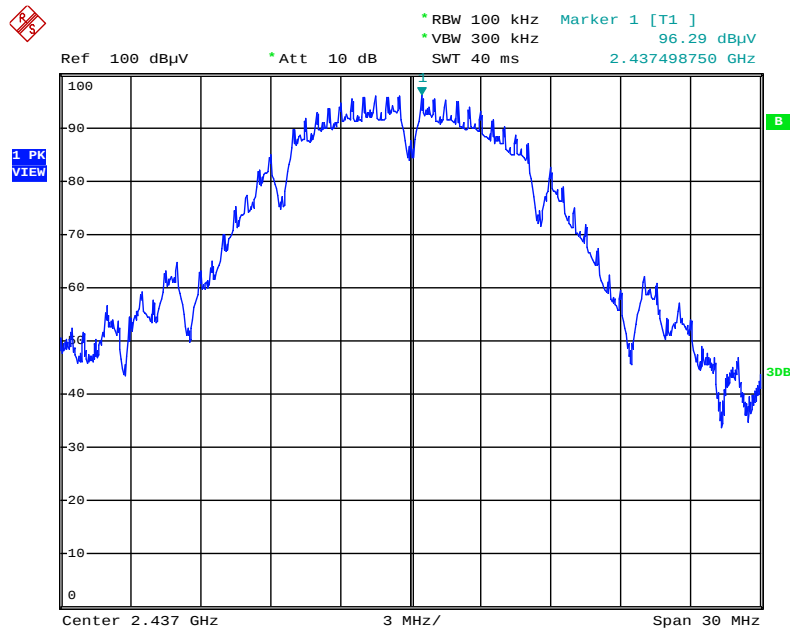


Date: 18.AUG.2014 17:46:24

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

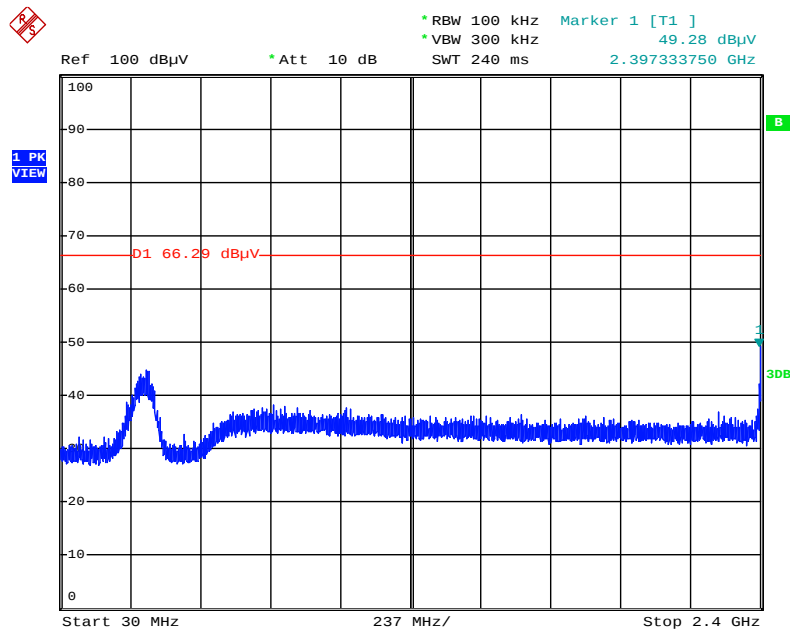


Date: 18.AUG.2014 17:51:10

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

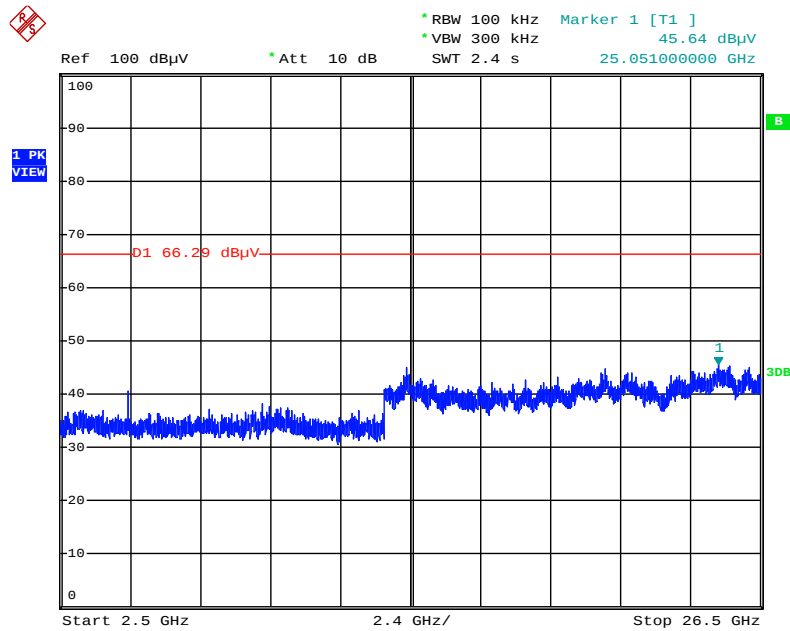


Date: 18.AUG.2014 17:55:31

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

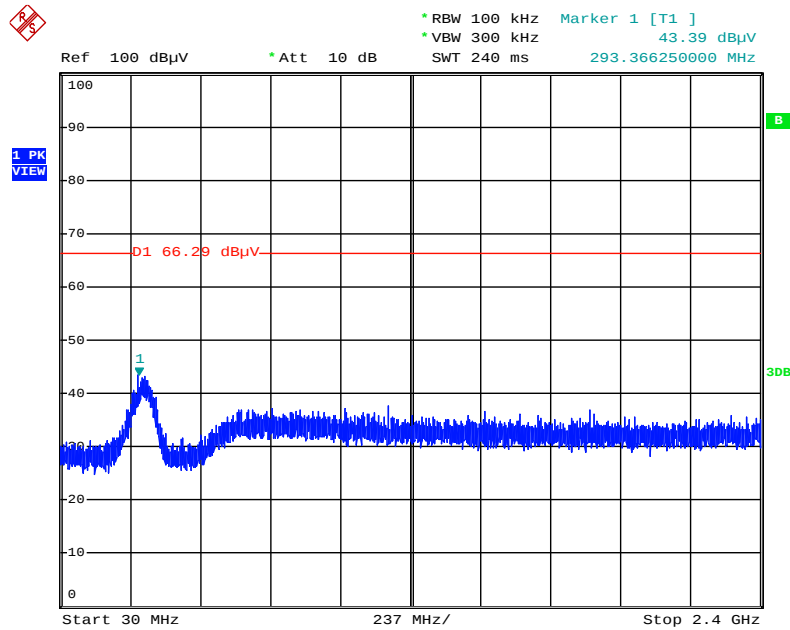


Date: 18.AUG.2014 17:57:01

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

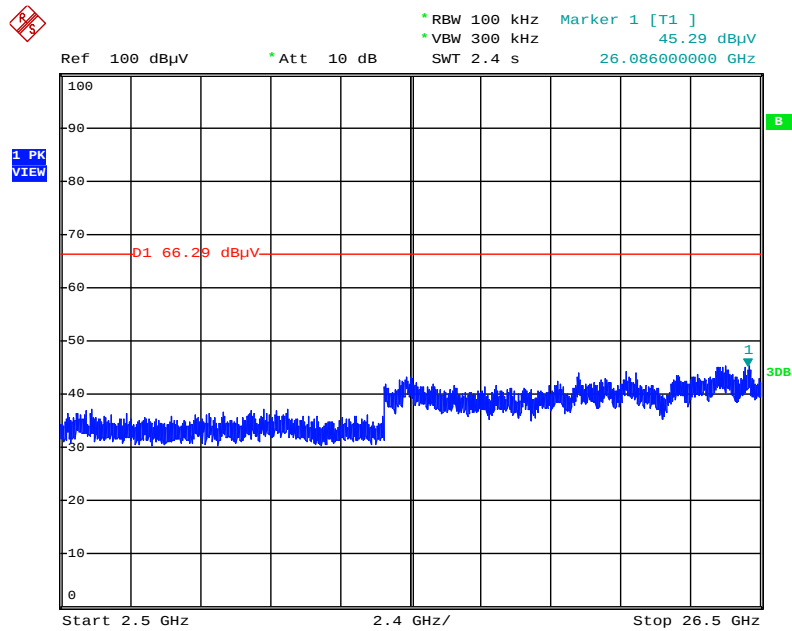


Date: 18.AUG.2014 17:56:30

Plot on Configuration IEEE 802.11g / Reference Level

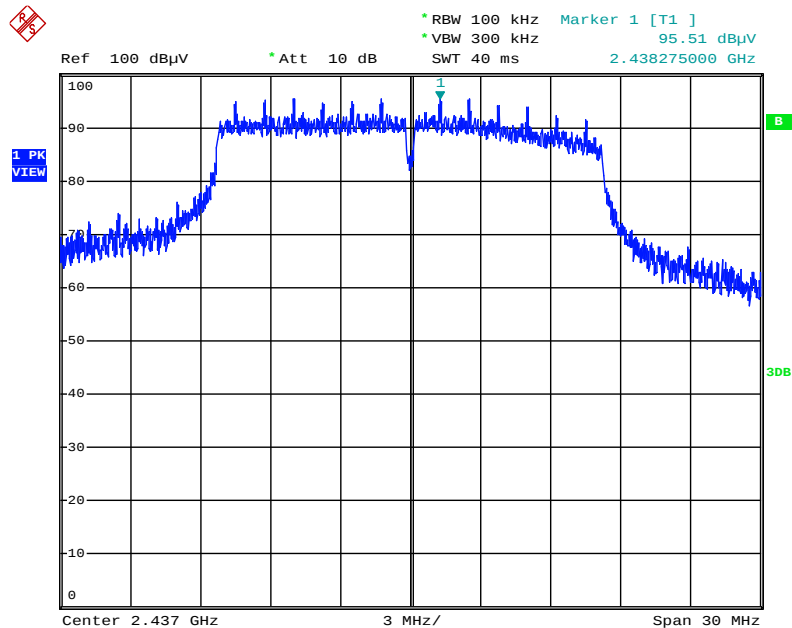


Date: 18.AUG.2014 18:01:10

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

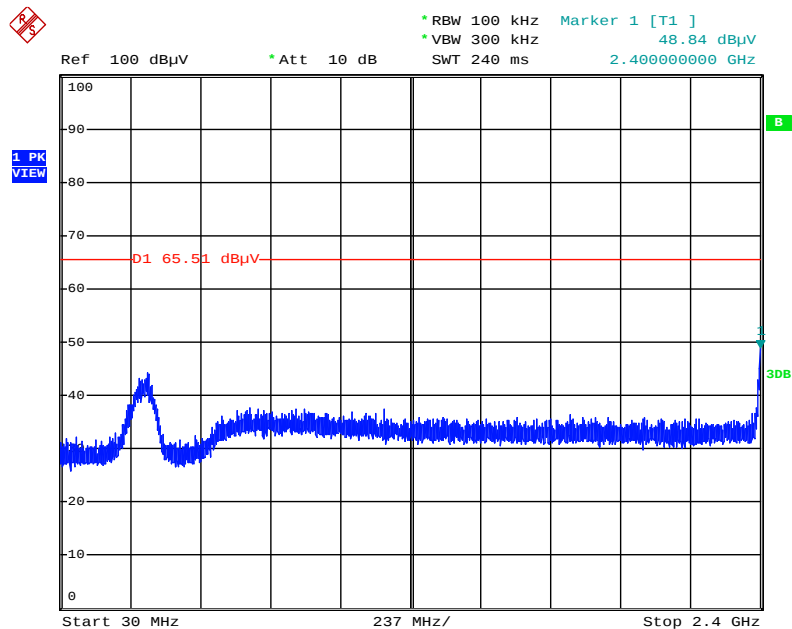


Date: 18.AUG.2014 18:03:50

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

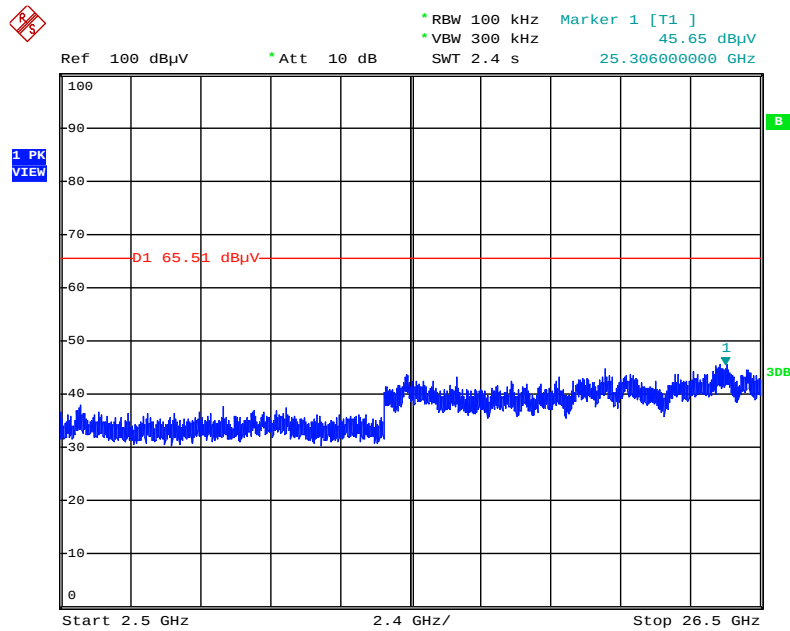


Date: 18.AUG.2014 18:04:34

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

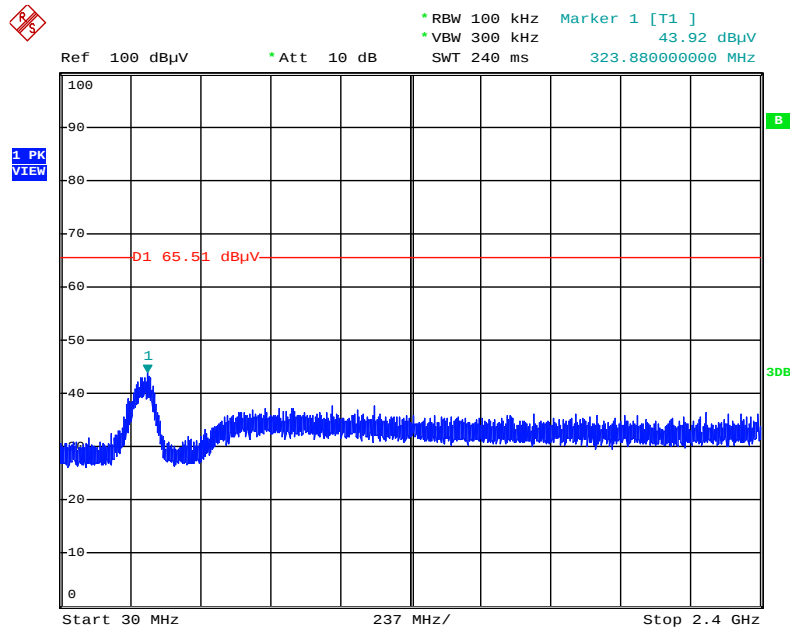

Date: 18.AUG.2014 18:05:58

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

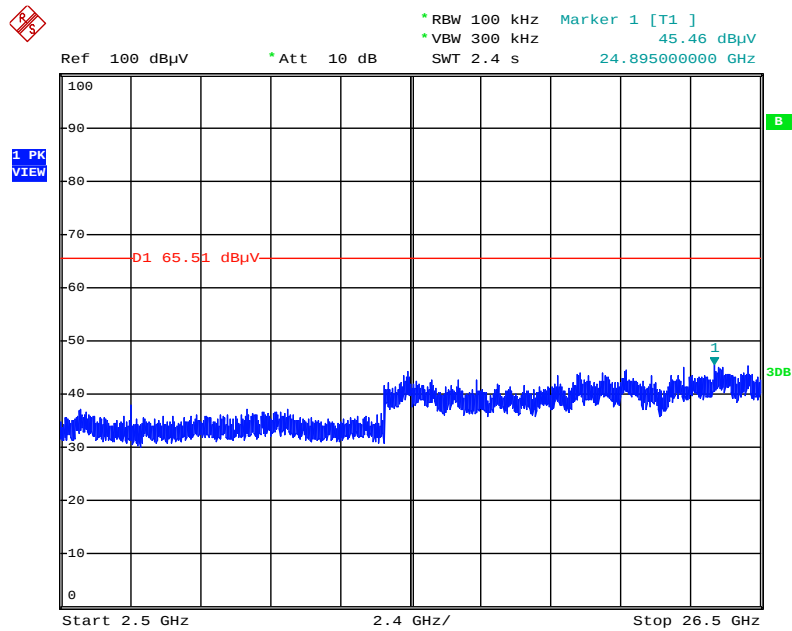


Date: 18.AUG.2014 18:05:29

<For Beamforming Mode>:


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

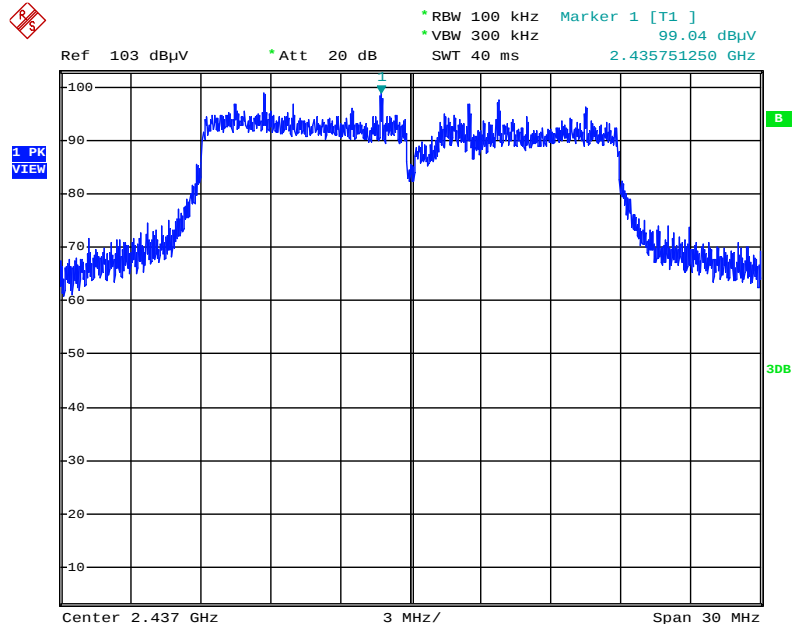


Date: 18.AUG.2014 18:55:08

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

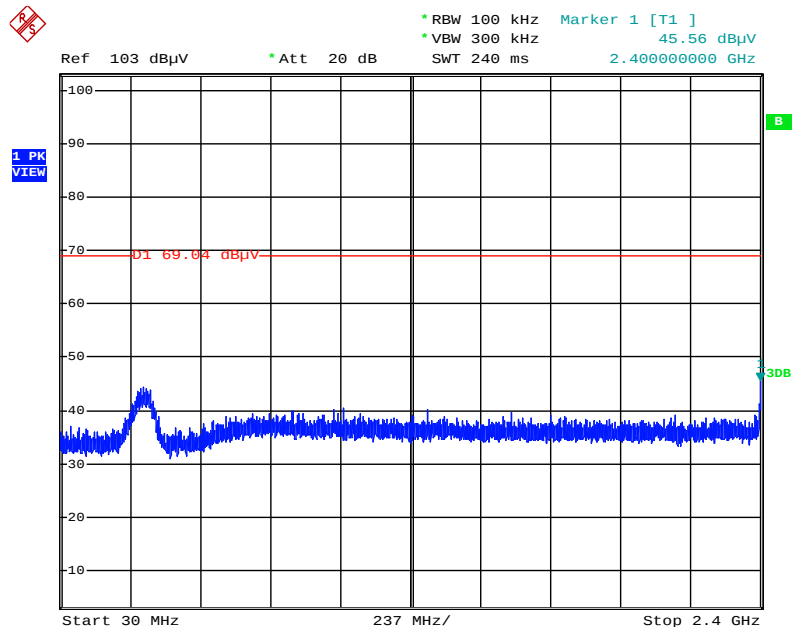


Date: 18.AUG.2014 18:59:49

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

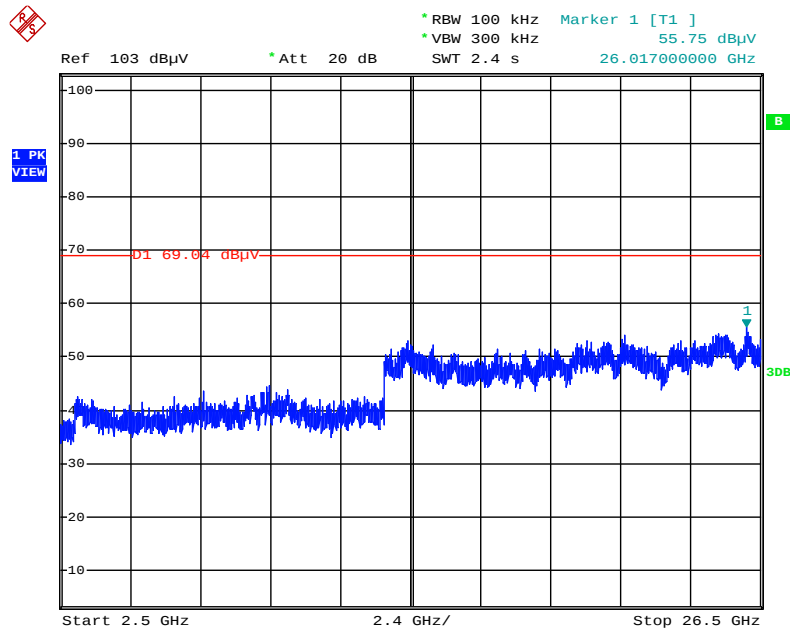


Date: 18.AUG.2014 19:00:31

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

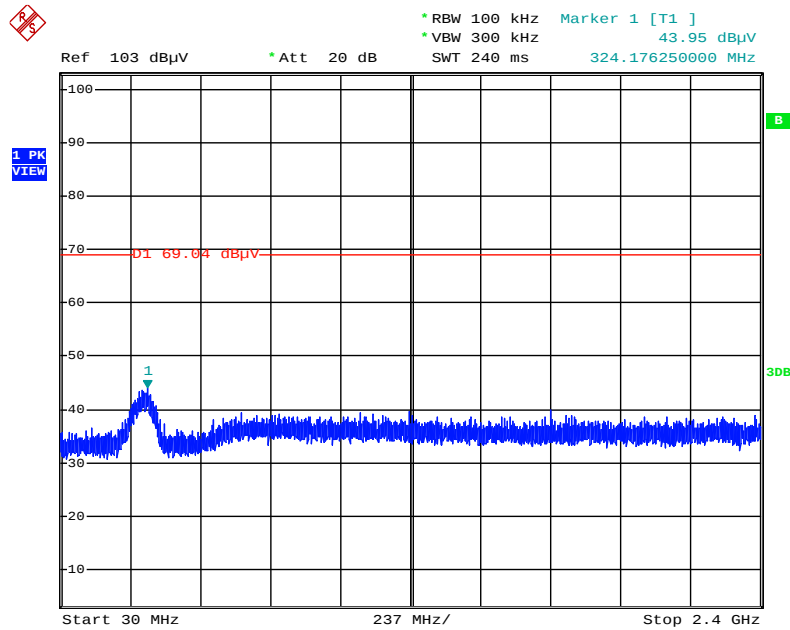

Date: 18.AUG.2014 19:03:15

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

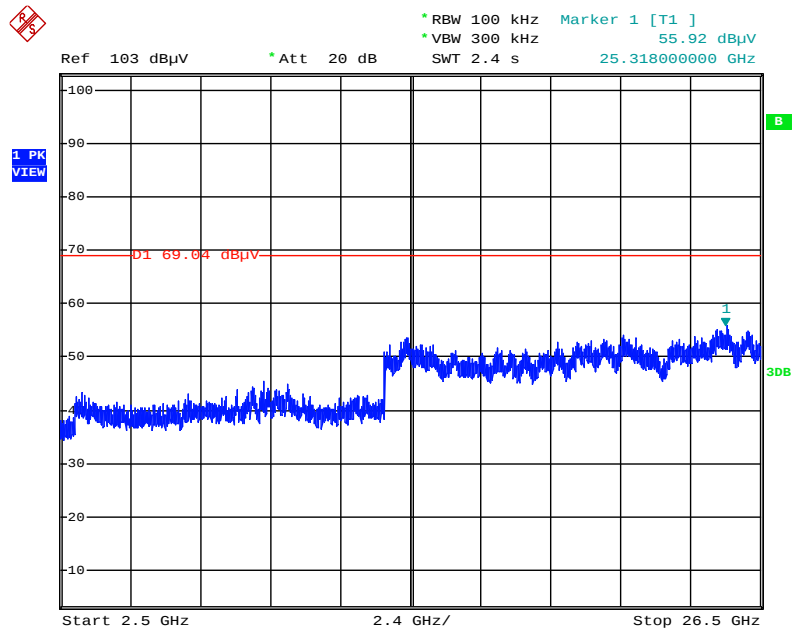

Date: 18.AUG.2014 19:02:38

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Signal analyzer	Agilent	N9010A	MY52220519	10Hz~44GHz	Dec. 11, 2013	Conducted (DF02)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Dec. 02, 2013	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Dec. 02, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%