

Yuande Electronics (Shenzhen) Co., Ltd.

Sample Approval Sheet

Product Information:

Customer	DOSS
Material Description	WB526 Antenna
Customer's Part number	
Specifications	FPC (W36.3*L21.5mm) +Black Coaxial Cable (Φ 1.13*65mm) +Welding
Supplier's Part number	136-WB526-10A
Date	2024-4-19

Supplier:

Prepared By	Checked By	Approved By
Zhang Dengqiao	Li Yuepeng	Zhang Hongying

Customer Approval:

Accepted By	Checked By	Approved By

Results:

- ☐ Full Approval
- ☐ Conditional Approval
- ☐ Unqualified
- ☐ Others:

Yuande Electronics (Shenzhen) Co., Ltd.

Add: Xiangyuer Industrial Park, No. 8, Longsheng Road, Longgang Street, Longgang District, Shenzhen, Guangdong, China

Tel: 86-755-28510731

Contents

1、 Specification.....	3
1.1 Electrical specification standard.....	3
1.1.1 Electrical Specifications.....	3
1.1.2 Antenna Matching Network.....	3
2、 Test.....	4
2.1 Test of passive S11.....	4
2.1.1 Test connection.....	4
2.1.2 Passive S11.....	4
2.2 Gain and efficiency test.....	5
2.2.1 Test Position.....	5
2.2.2 Test equipment.....	5
2.2.3 Results Summary.....	5
2.2.4 Radiation Pattern Results.....	6
2.3 OTA test.....	7
2.3.1 Results Summary.....	7
3、 Conclusion.....	7
4、 Part Drawing.....	8

1、Specification

This report mainly provides the testing status of various electrical and structural performance parameters of WB526 Antenna.



Figure 1 Antenna

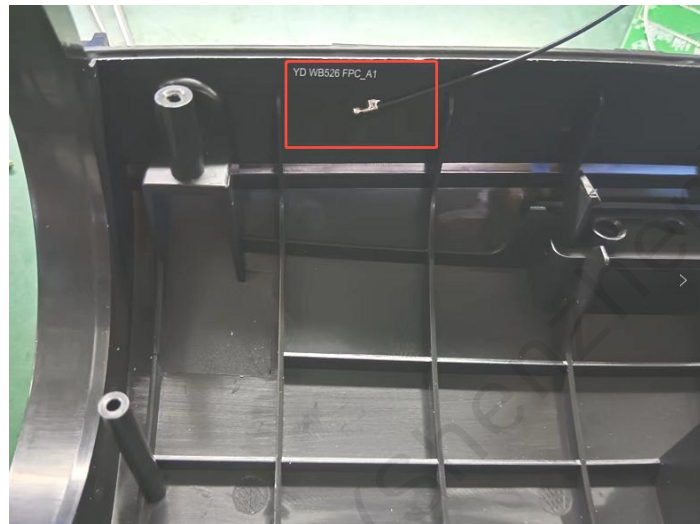


Figure 2 Antenna Position


1.1 Electrical specification standard

1.1.1 Electrical Specifications

The antenna operates in the 2400-2480 MHz. The following table is the electrical performance index of the antenna designed by our company.

Antenna	WB526 Antenna
Frequency Range	2400-2480MHz
VSWR	< 2.0
Efficiency	>50%
Impedance	50 ohm
Polarization	Linear polarization

1.1.2 Antenna Matching Network

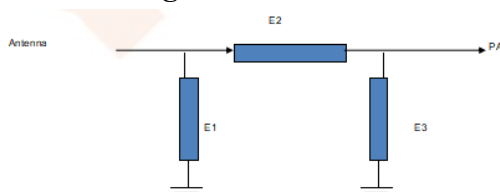

Element	Value
E1(0402)	N/A
E2(0402)	N/A
E3(0402)	N/A

2、Test

The antenna was debugged and tested with the prototype provided by the customer.

2.1 Test of passive S11


2.1.1 Test connection

The passive S11 test device is connected as follows: Network Analyzer → Test Line → Test Fixture.

2.1.2 Passive S11

The following table shows the standing wave ratio values of the edge frequency points of the antenna operating frequency band. The waveform of Return Loss and VSWR obtained by the test is shown as follows.

Frequency (MHz)	2400	2440	2480
VSWR	1.40	1.35	1.32
Return Loss	-15.46	-16.53	-16.99

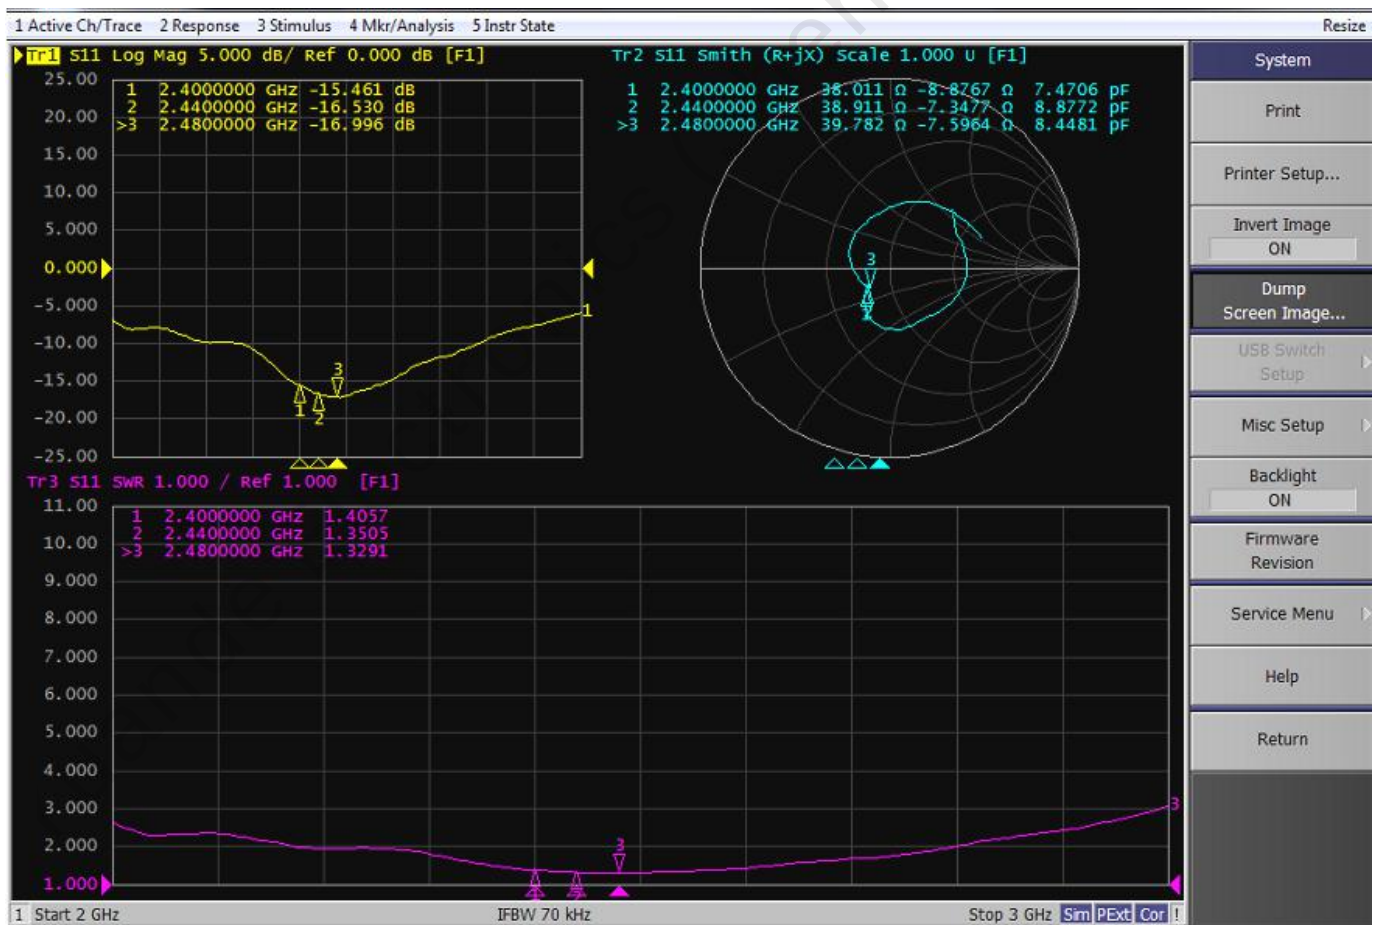

2.2 Gain and efficiency test

2.2.1 Test Position

Yuande microwave anechoic chamber, the test frequency range is 400MHz-6GHz.

2.2.2 Test equipment


Network analyzer, standard horn antenna, multi-probe near field antenna test system, test computer, etc

2.2.3 Results Summary

In the microwave anechoic chamber, the measured values related to efficiency and gain are shown in the table below.

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	2.17	52.16
2410	2.13	50.78
2420	2.56	53.72
2430	2.50	52.07
2440	2.51	52.09
2450	2.71	54.47
2460	2.48	50.81
2470	2.72	53.25
2480	2.46	50.28
2490	2.52	51.16
2500	2.62	52.39

2.2.4 Radiation Pattern Results

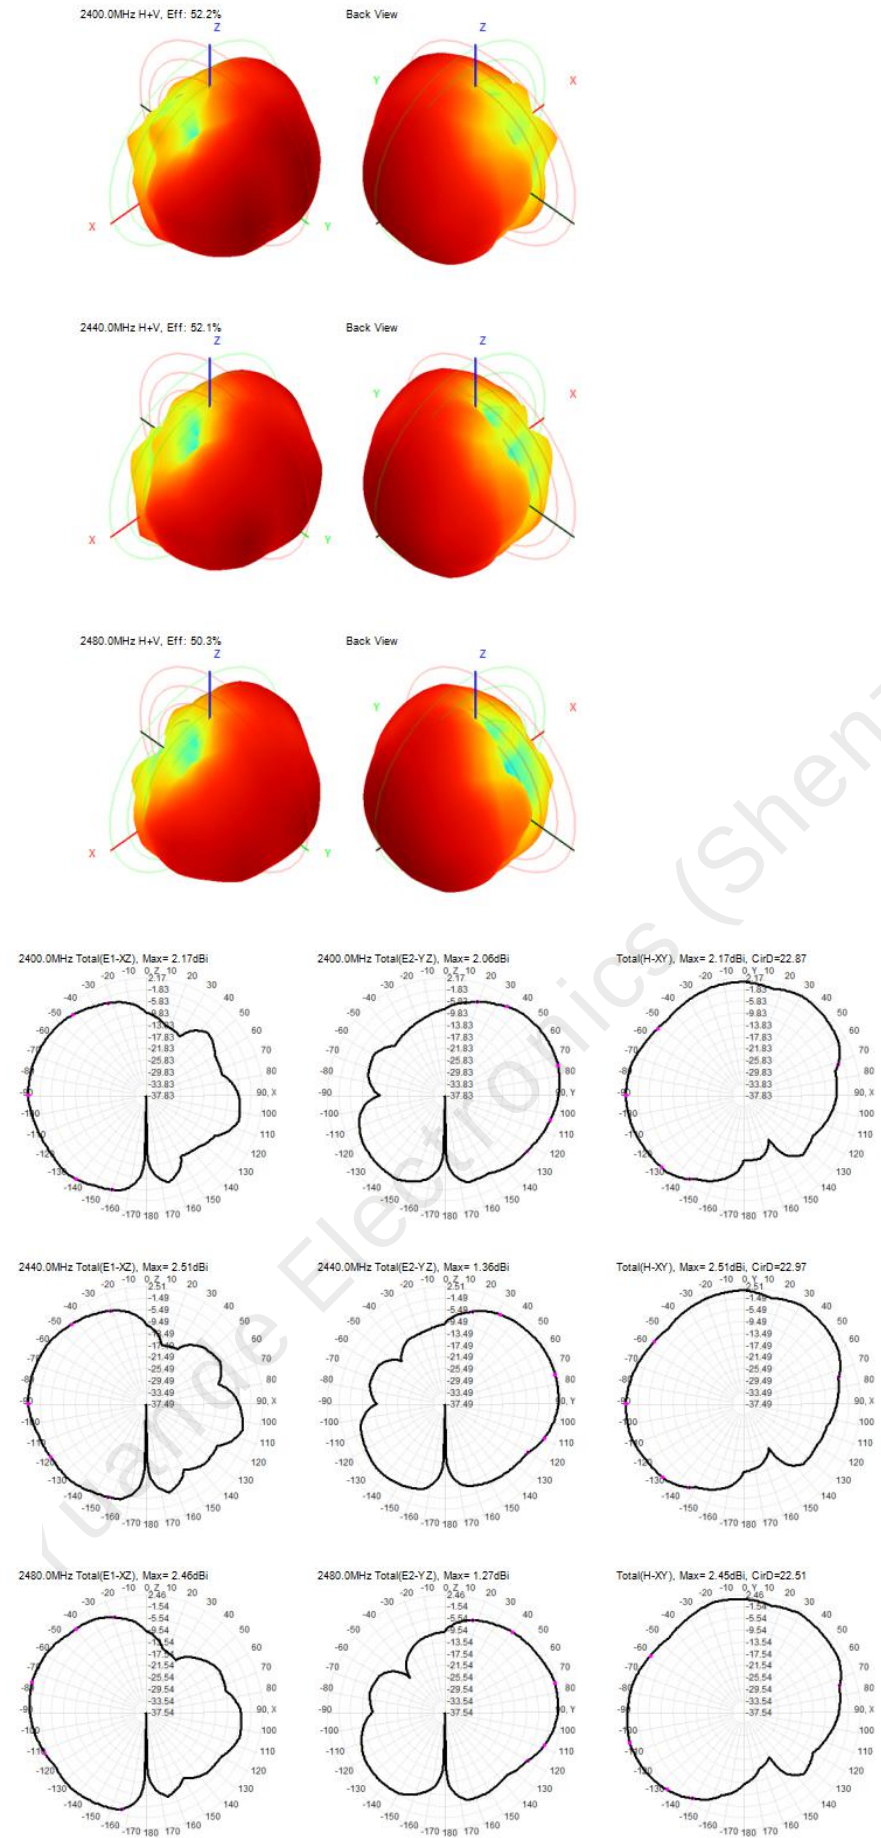

2.3 OTA test


2.3.1 Results Summary

	TRP/TIS
BlueTh-0000-TX	5.02
BlueTh-0039-TX	5.63
BlueTh-0078-TX	5.77
BlueTh-0000-RX	-94.02
BlueTh-0039-RX	-92.32
BlueTh-0078-RX	-92.24

3、 Conclusion

This antenna is designed on the basis of the prototype provided by the customer. The above electrical performance parameters are tested under the environmental treatment conditions of the test prototype. The electrical parameters and structural performance have met the technical requirements. Please confirm!

4、Part Drawing

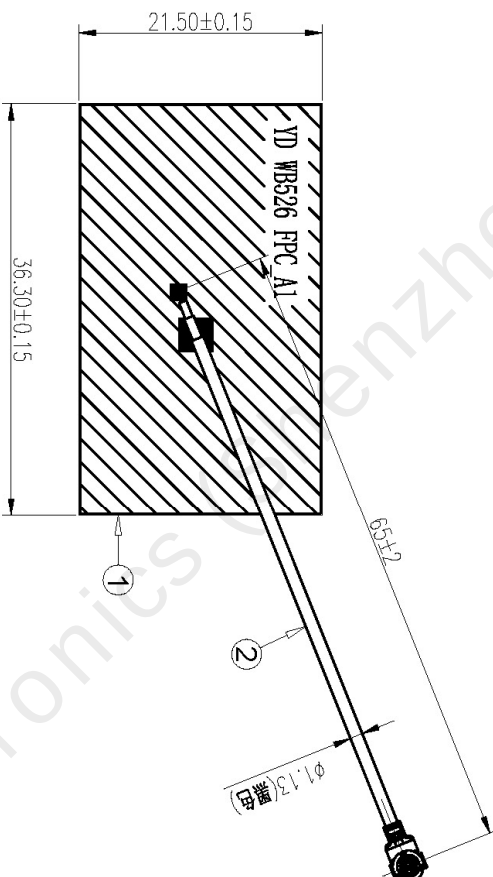1	2	3	4	5	6	7	8																																																								
				<table border="1"><thead><tr><th>Rev</th><th>Description</th><th>Date</th><th>Remark</th></tr></thead><tbody><tr><td>A</td><td>New drawing</td><td></td><td></td></tr></tbody></table>		Rev	Description	Date	Remark	A	New drawing																																																				
Rev	Description	Date	Remark																																																												
A	New drawing																																																														
																																																															
技术要求: 1. 标“*” 尺寸为重点管控尺寸; 2. 未标注尺寸依照图纸; 3. 无虚焊、假焊、连锡、短路、断路等焊接不良现象; 4. 所有部件需符合RoHS要求。																																																															
<table border="1"><thead><tr><th>No.</th><th>Part No.</th><th>Name</th><th>Specification</th><th>Amount</th><th>Remark</th></tr></thead><tbody><tr><td>2</td><td>164-S66XX-12A</td><td>85接铝同轴线</td><td>Ø1.13*65mm/黑色同轴线/-代端子</td><td>1</td><td></td></tr><tr><td>1</td><td>100-WB526-11A</td><td>WB526 FPC</td><td>单面板PI电焊铜, 黑色, 背胶3M9471</td><td>1</td><td></td></tr></tbody></table>								No.	Part No.	Name	Specification	Amount	Remark	2	164-S66XX-12A	85接铝同轴线	Ø1.13*65mm/黑色同轴线/-代端子	1		1	100-WB526-11A	WB526 FPC	单面板PI电焊铜, 黑色, 背胶3M9471	1																																							
No.	Part No.	Name	Specification	Amount	Remark																																																										
2	164-S66XX-12A	85接铝同轴线	Ø1.13*65mm/黑色同轴线/-代端子	1																																																											
1	100-WB526-11A	WB526 FPC	单面板PI电焊铜, 黑色, 背胶3M9471	1																																																											
<table border="1"><thead><tr><th colspan="4">远德电子 (深圳) 有限公司 Yuan de Electronics (Shenzhen) Co., LTD</th><th colspan="2">WB526</th><th colspan="2">Date 2022-10-25</th></tr><tr><th colspan="2">Third Angle</th><th>Project</th><th>Part Name</th><th>Part No.</th><th>Material</th><th>Technology</th><th>Unit</th></tr></thead><tbody><tr><td>0~10</td><td>±0.05</td><td>○</td><td>0.02</td><td>天线</td><td>136-WB526-10A</td><td></td><td>mm</td></tr><tr><td>10~18</td><td>±0.10</td><td>●</td><td>0.03</td><td></td><td></td><td></td><td></td></tr><tr><td>18~30</td><td>±0.12</td><td>⊥</td><td>0.02</td><td></td><td></td><td></td><td></td></tr><tr><td>30~40</td><td>±0.15</td><td>∇</td><td>0.04</td><td></td><td></td><td></td><td></td></tr><tr><td>40~</td><td>±0.20</td><td>Angle</td><td>±0.5°</td><td></td><td></td><td></td><td></td></tr></tbody></table>								远德电子 (深圳) 有限公司 Yuan de Electronics (Shenzhen) Co., LTD				WB526		Date 2022-10-25		Third Angle		Project	Part Name	Part No.	Material	Technology	Unit	0~10	±0.05	○	0.02	天线	136-WB526-10A		mm	10~18	±0.10	●	0.03					18~30	±0.12	⊥	0.02					30~40	±0.15	∇	0.04					40~	±0.20	Angle	±0.5°				
远德电子 (深圳) 有限公司 Yuan de Electronics (Shenzhen) Co., LTD				WB526		Date 2022-10-25																																																									
Third Angle		Project	Part Name	Part No.	Material	Technology	Unit																																																								
0~10	±0.05	○	0.02	天线	136-WB526-10A		mm																																																								
10~18	±0.10	●	0.03																																																												
18~30	±0.12	⊥	0.02																																																												
30~40	±0.15	∇	0.04																																																												
40~	±0.20	Angle	±0.5°																																																												
<table border="1"><thead><tr><th>Location</th><th>Angle</th><th>Technology</th><th>Unit</th><th>mm</th><th>Scale</th><th>1:1</th><th>Rev</th><th>Al</th></tr></thead><tbody><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>								Location	Angle	Technology	Unit	mm	Scale	1:1	Rev	Al																																															
Location	Angle	Technology	Unit	mm	Scale	1:1	Rev	Al																																																							