



# TEST REPORT

## Part 90 & IC RSS-119(Issue 12)

**Equipment under test** Integration Station

**Model name** J2001

**FCC ID** WDC-J2001

**IC** 7752A-J2001

**Applicant** JTECH an HME Company

**Manufacturer** Lee Technology Korea Co., Ltd.

**Date of test(s)** 2020.01.20 ~ 2020.01.31

**Date of issue** 2020.02.14

**Issued to**

**JTECH an HME Company**  
1400 Northbrook Parkway Suite #320  
Suwanee , GA USA 30024

**Issued by**

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

| Test and report completed by :                                                      | Report approval by :                                                                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| Young-Jin Lee<br>Test engineer                                                      | Hyeon-Su, Jang<br>Technical manager                                                  |



---

### Revision history

| Revision | Date of issue | Test report No. | Description |
|----------|---------------|-----------------|-------------|
| -        | 2020.02.14    | KES-RF-20T0030  | Initial     |
|          |               |                 |             |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## TABLE OF CONTENTS

|             |                                                       |    |
|-------------|-------------------------------------------------------|----|
| 1.          | General information .....                             | 4  |
| 1.1.        | EUT description .....                                 | 4  |
| 1.2.        | Test frequency .....                                  | 4  |
| 1.3.        | Information about derivative model .....              | 4  |
| 1.4.        | Device modifications .....                            | 4  |
| 2.          | Summary of tests .....                                | 6  |
| 3.          | Test results .....                                    | 7  |
| 3.1         | RF output power .....                                 | 7  |
| 3.2         | Bandwidth limitation .....                            | 10 |
| 3.3         | Emission mask .....                                   | 12 |
| 3.4         | Conducted spurious emissions .....                    | 14 |
| 3.5         | Frequency stability .....                             | 16 |
| 3.6         | Transient frequency behavior of the transmitter ..... | 21 |
| 3.7         | Radiation spurious emissions .....                    | 25 |
| Appendix A. | Test equipment used for test .....                    | 31 |
| Appendix B. | Test setup photo .....                                | 32 |



## 1. General information

Applicant JTECH an HME Company  
Applicant address 1400 Northbrook Parkway Suite #320 Suwanee , GA USA 30024  
Test site KES Co., Ltd.  
Test site address 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea  
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
Rule part(s) Part 90, IC RSS-119(Issue 12)  
Test device serial No. ☒ Production ☐ Pre-production ☐ Engineering

### 1.1. EUT description

Equipment under test Integration Station  
Frequency range 450.3250 MHz ~ 469.9875 MHz  
Model: J2001  
Type of emission 3K5F1D  
Channel separation 12.5 kHz  
Rated power 30.00 dBm  
Antenna specification BNC type (Helical antenna) // -2.61dBi  
Power source AC 120V Adapter (Output : DC 12V / 5 A )

### 1.2. Test frequency

|                 | Low channel | Middle channel | High channel |
|-----------------|-------------|----------------|--------------|
| Frequency (MHz) | 450.3250    | 457.5750       | 469.9875     |

### 1.3. Information about derivative model

N/A

### 1.4. Device modifications

N/A

### 1.5. Test configuration

The **JTECH an HME Company ServerCall Transmitter FCC ID : WDC-J2001 IC : 7752A-J2001** was tested per the guidance of ANSI C63.4-2014, TIA-603.E-2016, FCC CFR 47 Part 90, RSS-119 Issue 12, RSS-Gen Issue 5 was used to reference the appropriate EUT setup for radiated spurious emissions testing

### 1.5. Software and Firmware description

The software and firmware installed in the EUT is ver 004

### 1.6. Measurement results explanation example

For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.40 + 30.00 = 32.40 \text{ (dB)}\end{aligned}$$

### 1.7. Measurement Uncertainty

| Test Item                                                                                                                                     |              | Uncertainty |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------|
| Uncertainty for Conduction emission test                                                                                                      |              | 2.62 dB     |
| Uncertainty for Radiation emission test<br>(include Fundamental emission)                                                                     | 9kHz - 30MHz | 4.54 dB     |
|                                                                                                                                               | 30MHz - 1GHz | 4.36 dB     |
|                                                                                                                                               | Above 1GHz   | 5.00 dB     |
| Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |              |             |



## 2. Summary of tests

| Reference                  | Parameter                    | Test results |
|----------------------------|------------------------------|--------------|
| 90.205<br>RSS-119 5.4      | RF output power              | Pass         |
| 90.209<br>RSS-Gen 6.7      | Bandwidth limitation         | Pass         |
| 90.210(d)<br>RSS-119 5.8.4 | Emission mask                | Pass         |
| 90.210(d)<br>RSS-119 5.8.3 | Conducted spurious emissions | Pass         |
| 90.213<br>RSS-119 5.3      | Frequency stability          | Pass         |
| 90.214<br>RSS-119 5.9      | Transient frequency behavior | Pass         |
| 90.210(d)<br>RSS-119 5.8.3 | Radiated spurious emissions  | Pass         |

### 3. Test results

#### 3.1 RF output power

##### Test setup



##### Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator
2. Use the following spectrum analyzer setting
  - Span = 2 MHz
  - RBW = 100 kHz
  - VBW = 100 kHz ( $\geq$  RBW)
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold

##### Limit

According to FCC 90.205(h) 450 ~ 470 MHz. (1) The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2. Applicants requesting an ERP in excess of that listed in table 2 must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.

Table 2. 450 ~ 470 MHz—Maximum ERP/Reference HAAT for a Specific Service Area Radius

|                                       | Service area radius (km) |     |      |      |      |      |                 |                 |                 |                 |
|---------------------------------------|--------------------------|-----|------|------|------|------|-----------------|-----------------|-----------------|-----------------|
|                                       | 3                        | 8   | 13   | 16   | 24   | 32   | 40 <sup>4</sup> | 48 <sup>4</sup> | 64 <sup>4</sup> | 80 <sup>4</sup> |
| Maximum ERP (W) <sup>1</sup>          | 2                        | 100 | 2500 | 2500 | 2500 | 2500 | 2500            | 2500            | 2500            | 2500            |
| Up to reference HAAT (m) <sup>3</sup> | 15                       | 15  | 15   | 27   | 63   | 125  | 250             | 410             | 950             | 2700            |

<sup>1</sup>Maximum ERP indicated provides for a 39 dBu signal strength at the edge of the service area per FCC Report R-6602, Fig. 29 (See §73.699, Fig. 10 b).

<sup>2</sup>Maximum ERP of 500 watts allowed. Signal strength at the service area contour may be less than 39 dBu.

<sup>3</sup>When the actual antenna HAAT is greater than the reference HAAT, the allowable ERP will be reduced in accordance with the following equation:  $ERP_{allow} = ERP_{max} \times (HAAT_{ref}/HAAT_{actual})^2$ .

<sup>4</sup>Applications for this service area radius may be granted upon specific request with justification and must include a technical demonstration that the signal strength at the edge of the service area does not exceed 39 dBu.

#### RSS-119 5.4

The output power shall be within  $\pm 1$  dB of the manufacturer's rated power listed in the equipment specifications.

The transmitter output power limits set forth in Table 2 will come into force upon the publication of Issue 12 of this standard and will apply to newly certified equipment.

**Table 2 – Transmitter Output Power**


| Frequency Bands (MHz)                   | Transmitter Output Power (W) |                                      |
|-----------------------------------------|------------------------------|--------------------------------------|
| Base/Fixed Equipment                    | Mobile Equipment             |                                      |
| 27.41-28 and 29.7-50                    | 300                          | 30                                   |
| 72-76                                   | No limit                     | 1                                    |
| 138-174                                 | 110                          | 60                                   |
| 217-218 and 219-220                     | 110                          | 30*                                  |
| 220-222                                 | See SRSP-512 for ERP limit   | 50                                   |
| 406.1-430 and 450-470                   | 110                          | 60                                   |
| 768-776 and 798-806                     | See SRSP-511 for ERP limit   | 30<br>3 W ERP for portable equipment |
| 806-821/851-866 and 821-824/866-869     | 110                          | 30                                   |
| 896-901/935-940                         | 110                          | 60                                   |
| 929-930/931-932                         | 110                          | 30                                   |
| 928-929/952-953 and 932-932.5/941-941.5 | 110                          | 30                                   |
| 932.5-935/941.5-944                     | 110                          | 30                                   |

\*Equipment is generally authorized for effective radiated power (ERP) of less than 5 W.



## Test results


| Frequency (MHz) | Output power(dBm) | Output power(W) | Rated power(dBm) |
|-----------------|-------------------|-----------------|------------------|
| 450.3250        | 29.49             | 0.89            | 30.00            |
| 457.5750        | 29.60             | 0.91            |                  |
| 469.9875        | 29.25             | 0.84            |                  |

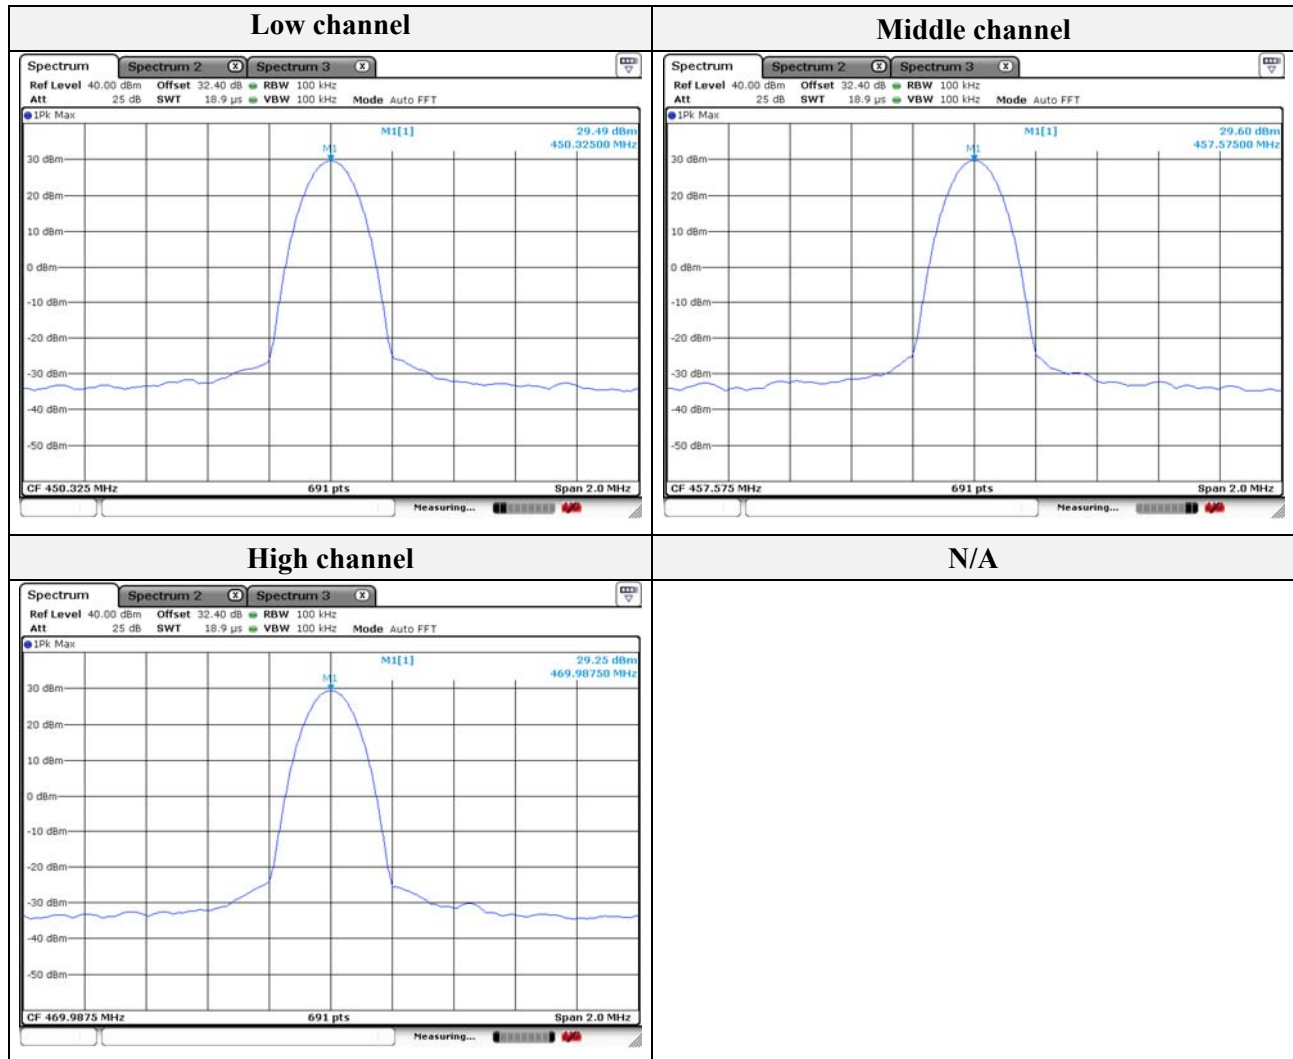

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## 3.2 Bandwidth limitation

### Test setup



### Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator
2. Use the following spectrum analyzer setting
  - Span = 50 kHz
  - RBW = 300 Hz
  - VBW = 300 Hz ( $\geq$  RBW)
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
3. Mark the peak frequency and -20 dB(Upper and lower) frequency.

### Limit

N/A

### Test results


| Frequency(MHz) | 20 dB bandwidth (kHz) | OBW (kHz) |
|----------------|-----------------------|-----------|
| 450.3250       | 3.878                 | 3.531     |
| 457.5750       | 3.849                 | 3.502     |
| 469.9875       | 3.849                 | 3.502     |



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-20T0030  
Page (11 ) of (32)

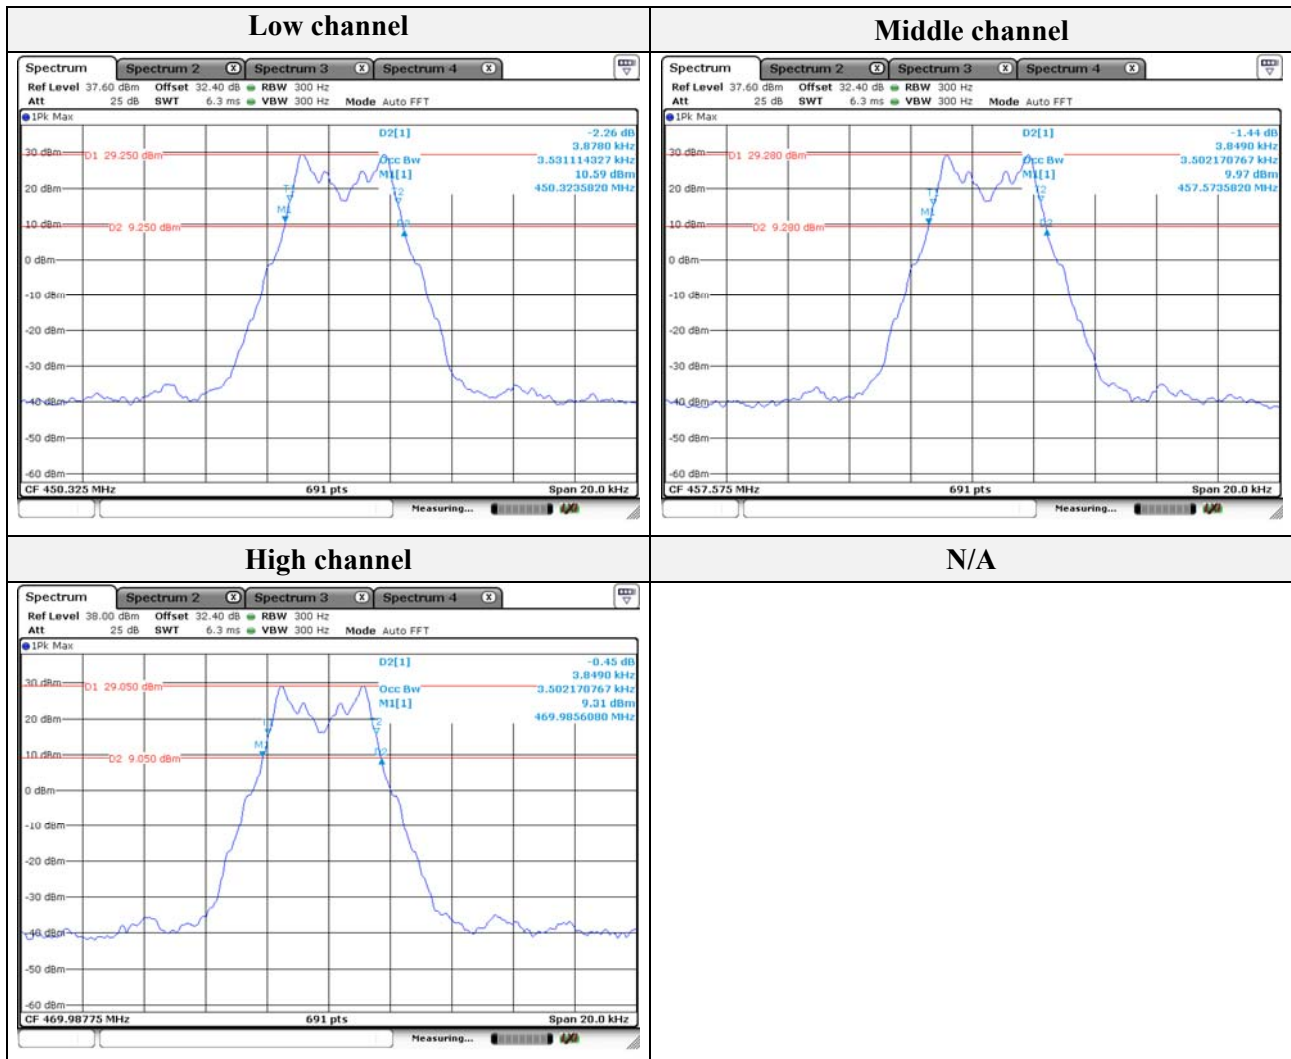

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.3 Emission mask

#### Test setup



#### Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator
2. Use the following spectrum analyzer setting
  - Span = 120 kHz
  - RBW = 100 Hz
  - VBW = 100 Hz (≥ RBW)
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
3. Mark the peak frequency with maximum peak power as the center of the display of the spectrum analyzer.
4. Record the power spectrum analyzer and compare to the mask.

**Emission Mask E - 6.25 kHz or less channel bandwidth equipment.** For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 3.0 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(f_d - 3)$  kHz) or  $55 + 10 \log(P)$  or 65 dB, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10 \log(P)$  or 65 dB, whichever is the lesser attenuation.


#### RSS-119 5.8.4

The power of any emission shall be attenuated below the transmitter output power P(dBW) as specified in Table 8.

Table 8 – Emission Mask E

| Displacement Frequency, $f_d$ (kHz) | Minimum Attenuation (dB)                                                    | Resolution Bandwidth (Hz)  |
|-------------------------------------|-----------------------------------------------------------------------------|----------------------------|
| $3 < f_d \leq 4.6$                  | Whichever is the lesser:<br>$30 + 16.67(f_d - 3)$ or $55 + 10 \log_{10}(p)$ | Specified in Section 4.2.2 |
| $f_d > 4.6$                         | Whichever is the lesser:<br>57 or $55 + 10 \log_{10}(p)$                    | Specified in Section 4.2.2 |


## Test results

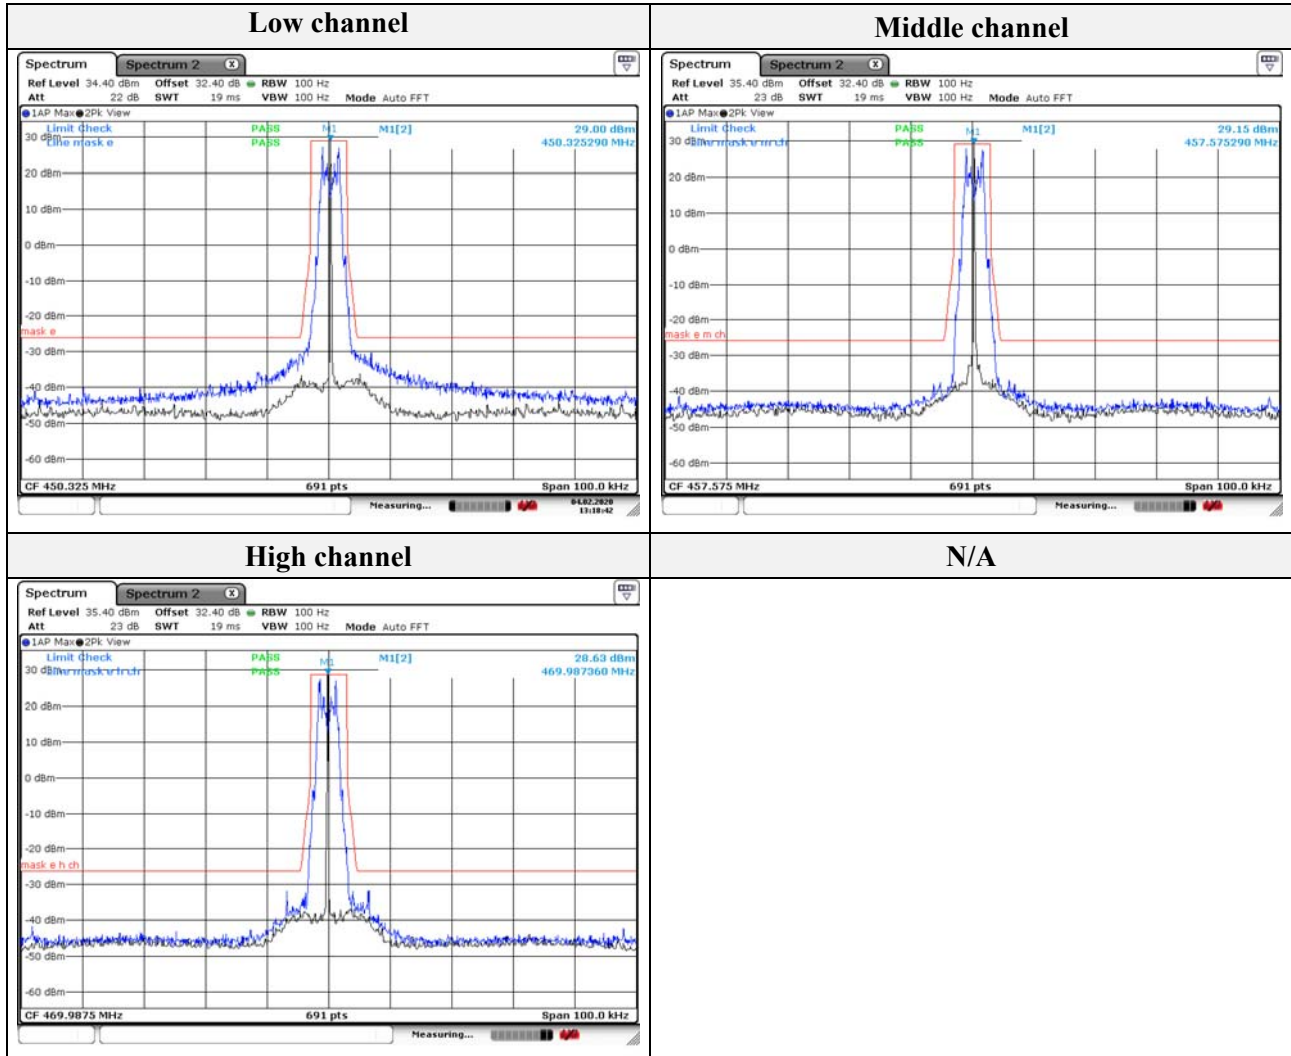

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

### 3.4 Conducted spurious emissions

#### Test setup



#### Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator
2. Use the following spectrum analyzer setting
  - Span = 30 MHz to 5 GHz
  - RBW = 100 kHz(< 1 GHz), 1 MHz(> 1 GHz)
  - VBW = 300 kHz(< 1 GHz), 3 MHz(> 1 GHz)
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold

#### Limit

**Emission Mask E - 6.25 kHz or less channel bandwidth equipment.** For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10 \log(P)$  or 65 dB, whichever is the lesser attenuation.


#### RSS-119 5.8.4

The power of any emission shall be attenuated below the transmitter output power P(dBW) as specified in Table 7.  
Table 8 – Emission Mask E

| Displacement Frequency, $f_d$ (kHz) | Minimum Attenuation (dB)                                                    | Resolution Bandwidth (Hz)  |
|-------------------------------------|-----------------------------------------------------------------------------|----------------------------|
| $3 < f_d \leq 4.6$                  | Whichever is the lesser:<br>$30 + 16.67(f_d - 3)$ or $55 + 10 \log_{10}(p)$ | Specified in Section 4.2.2 |
| $f_d > 4.6$                         | Whichever is the lesser:<br>57 or $55 + 10 \log_{10}(p)$                    | Specified in Section 4.2.2 |




## Test results

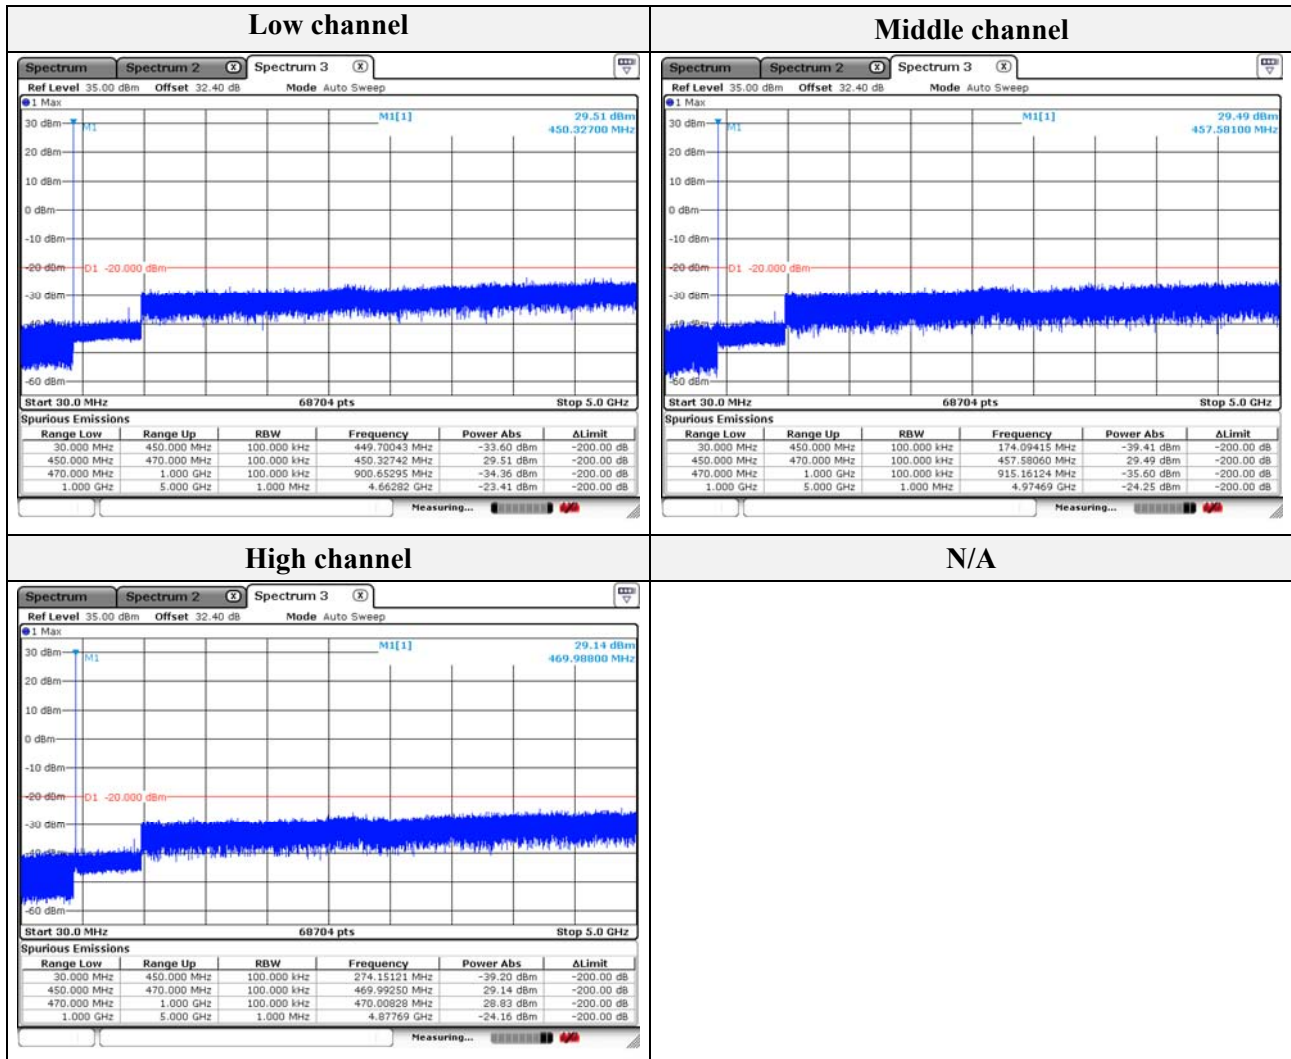

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.5 Frequency stability

#### Test setup

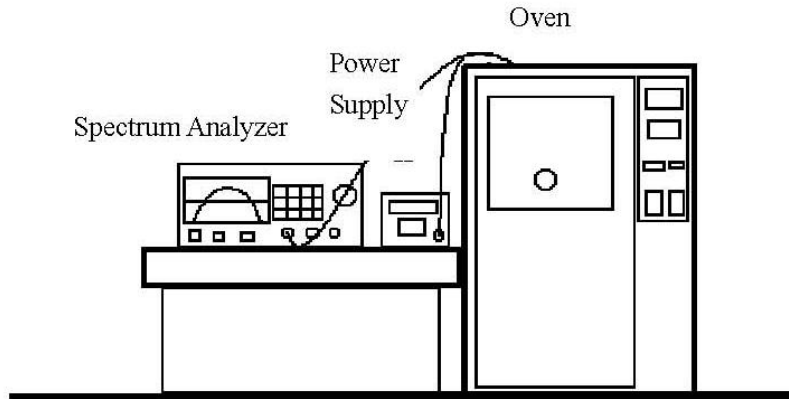

#### Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The transmission time was measured with the spectrum analyzer using RBW=1 kHz, VBW=1 kHz.
3. Set the temperature of chamber to -30 °C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10 °C decreased per stage until the highest temperature 50 °C is measured, record all measured frequencies on each temperature step.

### Limit

1. According to FCC part 2 section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30 °C to +50 °C centigrade.
2. According to FCC part section 2.1055(d)(2), for battery powered equipment the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
3. According to FCC part 90 section 90.213, (a) Unless noted elsewhere, transmitters used in the services overned by this part must have a minimum frequency stability as specified in the following table.

**Minimum Frequency Stability [Parts per million (ppm)]**

| Frequency range (MHz)    | Fixed and base stations | Mobile stations           |                              |
|--------------------------|-------------------------|---------------------------|------------------------------|
|                          |                         | Over 2 watts output power | 2 watts or less output power |
| Below 25                 | <sup>1,2,3</sup> 100    | 100                       | 200                          |
| 25–50                    | 20                      | 20                        | 50                           |
| 72–76                    | 5                       |                           | 50                           |
| 150–174                  | <sup>5,11</sup> 5       | <sup>6</sup> 5            | <sup>4,6</sup> 50            |
| 216–220                  | 1.0                     |                           | 1.0                          |
| 220–222 <sup>12</sup>    | 0.1                     | 1.5                       | 1.5                          |
| 421–512                  | <sup>7,11,14</sup> 2.5  | <sup>8</sup> 5            | <sup>8</sup> 5               |
| 806–809                  | <sup>14</sup> 1.0       | 1.5                       | 1.5                          |
| 809–824                  | <sup>14</sup> 1.5       | 2.5                       | 2.5                          |
| 851–854                  | 1.0                     | 1.5                       | 1.5                          |
| 854–869                  | 1.5                     | 2.5                       | 2.5                          |
| 896–901                  | <sup>14</sup> 0.1       | 1.5                       | 1.5                          |
| 902–928                  | 2.5                     | 2.5                       | 2.5                          |
| 902–928 <sup>13</sup>    | 2.5                     | 2.5                       | 2.5                          |
| 929–930                  | 1.5                     |                           |                              |
| 935–940                  | 0.1                     | 1.5                       | 1.5                          |
| 1427–1435                | <sup>9</sup> 300        | 300                       | 300                          |
| Above 2450 <sup>10</sup> |                         |                           |                              |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

- <sup>1</sup>Fixed and base stations with over 200 watts transmitter power must have a frequency stability of 50 ppm except for equipment used in the Public Safety Pool where the frequency stability is 100 ppm.
- <sup>2</sup>For single sideband operations below 25 MHz, the carrier frequency must be maintained within 50 Hz of the authorized carrier frequency.
- <sup>3</sup>Travelers information station transmitters operating from 530 ~ 1 700 kHz and transmitters exceeding 200 watts peak envelope power used for disaster communications and long distance circuit operations pursuant to §90.242 and §90.264 must maintain the carrier frequency to within 20 Hz of the authorized frequency.
- <sup>4</sup>Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- <sup>5</sup>In the 150 ~ 174 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
- <sup>6</sup>In the 150 ~ 174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.
- <sup>7</sup>In the 421 ~ 512 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 1.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 0.5 ppm.
- <sup>8</sup>In the 421 ~ 512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
- <sup>9</sup>Fixed stations with output powers above 120 watts and necessary bandwidth less than 3 kHz must operate with a frequency stability of 100 ppm. Fixed stations with output powers less than 120 watts and using time-division multiplex, must operate with a frequency stability of 500 ppm.
- <sup>10</sup>Except for DSRCS equipment in the 5 850 ~ 5 925 MHz band, frequency stability is to be specified in the station authorization. Frequency stability for DSRCS equipment in the 5 850 ~ 5 925 MHz band is specified in subpart M of this part.
- <sup>11</sup>Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150 ~ 174 MHz band and 2.5 ppm in the 421 ~ 512 MHz band.
- <sup>12</sup>Mobile units may utilize synchronizing signals from associated base stations to achieve the specified carrier stability.
- <sup>13</sup>Fixed non-multilateration transmitters with an authorized bandwidth that is more than 40 kHz from the band edge, intermittently operated hand-held readers, and mobile transponders are not subject to frequency tolerance restrictions.
- <sup>14</sup>Control stations may operate with the frequency tolerance specified for associated mobile frequencies.
- (b) For the purpose of determining the frequency stability limits, the power of a transmitter is considered to be the maximum rated output power as specified by the manufacturer.

**RSS-119 5.3**

The carrier frequency shall not depart from the reference frequency in excess of the values given in Table 1. For transmitters which have an output power of less than 120 mW, the frequency stability may comply with the limits listed in Table 1, of alternatively with the conditions in Section 5.10.

For fixed and base station equipment, in lieu of meeting the frequency stability limit specified in Table 1, the test report can show that the frequency stability is met by demonstrating that the unwanted emission limits, related to the equipment's nominal carrier frequency measured under normal operation, are met when the equipment is tested at the temperature and supply voltage variations specified for the frequency stability measurement in RSS-Gen.

Table 1 – Transmitter Frequency Stability

| Frequency range (MHz)                                    | Channel Spacing (kHz) | Frequency Stability (ppm) |                           |               |
|----------------------------------------------------------|-----------------------|---------------------------|---------------------------|---------------|
|                                                          |                       | Base/Fixed                | Mobile stations           |               |
|                                                          |                       |                           | > 2 watts                 | ≤ 2 watts     |
| 27.41 ~ 28 and 29.7 ~ 50                                 | 20                    | 20                        | 20                        | 50            |
| 72 ~ 76                                                  | 20                    | 5                         | 20                        | 50            |
| 138 ~ 174                                                | 30                    | 5                         | 5                         | 5             |
|                                                          | 15                    | 2.5                       | 5                         | 5             |
|                                                          | 7.5                   | 1                         | 2                         | 5             |
| 217 ~ 218 and 219 ~ 220                                  | 12.5                  | 1                         | 5                         | 5             |
| 220 ~ 222 (Note 1)                                       | 5                     | 0.1                       | 1.5                       | 1.5           |
| 406.1 ~ 430 and 450 ~ 470 (Note 6)                       | 25 (Note 2)           | 0.5                       | 1                         | 1             |
|                                                          | 25                    | 2.5                       | 5                         | 5             |
|                                                          | 12.5                  | 1.5                       | 2.5                       | 2.5           |
|                                                          | 6.25                  | 0.5                       | 1                         | 1             |
| 764 ~ 776 and 794 ~ 806 (Note 3)                         | 6.25<br>12.5<br>25    | 0.1                       | 0.4 (Note 4)              | 0.4 (Note 4)  |
|                                                          | 50                    | 1                         | 1.25 (Note 5)             | 1.25 (Note 5) |
| 806 ~ 821 / 851 ~ 866 and 821 ~ 824 / 866 ~ 869 (Note 6) | 25 (Note 2)           | 0.1                       | 0.1                       | 0.1           |
|                                                          | 25                    | 1.5                       | 2.5                       | 2.5           |
|                                                          | 12.5                  | 1                         | 1.5                       | 1.5           |
| 896 ~ 901 / 935 ~ 940 (Note 6)                           | 12.5                  | 0.1                       | 1.5                       | 1.5           |
| 929 ~ 930 / 931 ~ 932                                    | 25                    | 1.5                       | N/A                       | N/A           |
| 928 ~ 929 / 952 ~ 953 and 932 ~ 932.5 / 941 ~ 941.5      | 25                    | 1.5                       | N/A                       | N/A           |
|                                                          | 12.5                  | 1                         | 3<br>(for remote station) | N/A           |
| 932.5 ~ 935 / 941.5 ~ 944                                | 25                    | 2.5                       | N/A                       | N/A           |
|                                                          | 12.5                  | 2.5                       | N/A                       | N/A           |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**Notes:**

1. Mobile units may use synchronizing signals from associated base stations to achieve the specified carrier stability.
2. This provision is for digital equipment with a channel bandwidth of 25 kHz and an occupied bandwidth greater than 20 kHz. The mobile station's frequency stability values given in Table 1 are for mobile, portable and control transmitters using automatic frequency control (AFC) to lock onto the base station signal. When the mobile, portable and control transmitters are operating without using AFC to lock onto the base station signal, the frequency stability limit shall be better than 1 kHz and the equipment's unwanted emissions measured with maximum frequency shift shall still comply with emission mask Y (Section 5.8.10) at nominal carrier frequency.
3. Mobile, portable and control transmitters operating in the bands 768-776 MHz and 798-806 MHz must normally use AFC to lock onto the base station signal. The mobile station's frequency stability values given in Table 1 are for mobile stations operating under this condition.
4. When the mobile, portable and control transmitters are operating with channel bandwidths equal to 6.25 kHz, 12.5 kHz or 25 kHz in the band 768-776 MHz and the AFC is not locked onto the base station signal, the frequency stability must be equal to or better than 1 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2-channel aggregate), and 2.5 ppm for 25 kHz (4-channel aggregate).
5. When the mobile, portable and control transmitters are operating with channel bandwidths equal to 50 kHz in the band 768-776 MHz and the AFC is not locked onto the base station signal, the frequency stability must be equal to or better than 5 ppm.
6. Control stations may operate with the frequency stability specified for associated mobile frequencies.

**Test results**


Assigned frequency (MHz): 457.5750

| Test voltage (%) | Test voltage (V) | Temperature (°C) | Measure frequency (MHz) | Frequency deviation (Hz) | Frequency deviation (ppm) | Limit (ppm) |     |
|------------------|------------------|------------------|-------------------------|--------------------------|---------------------------|-------------|-----|
|                  |                  |                  |                         |                          |                           | FCC         | IC  |
| 100 %            | AC 120           | -30              | 457.574811              | -189                     | -0.41                     | 2.5         | 0.5 |
|                  |                  | -20              | 457.574910              | -90                      | -0.20                     |             |     |
|                  |                  | -10              | 457.575004              | 4                        | 0.01                      |             |     |
|                  |                  | 0                | 457.574814              | -186                     | -0.41                     |             |     |
|                  |                  | 10               | 457.574812              | -188                     | -0.41                     |             |     |
|                  |                  | 20               | 457.575129              | 129                      | 0.28                      |             |     |
|                  |                  | 30               | 457.575212              | 212                      | 0.46                      |             |     |
|                  |                  | 40               | 457.575134              | 134                      | 0.29                      |             |     |
|                  |                  | 50               | 457.575225              | 225                      | 0.49                      |             |     |
| 115 %            | AC 102           | 20               | 457.575029              | 29                       | 0.06                      |             |     |
| 85 %             | AC 138           | 20               | 457.575132              | 132                      | 0.29                      |             |     |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### 3.6 Transient frequency behavior of the transmitter

#### Test setup

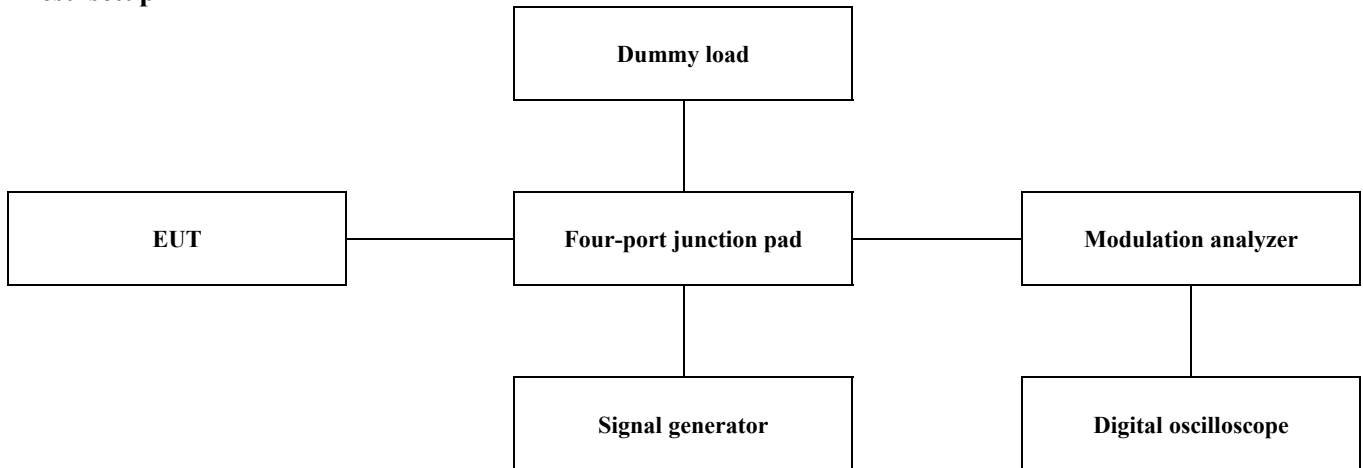

#### Test procedure

1. Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 6.25$  kHz deviation and set its output level to -15 dBm.
2. Key the transmitter.
3. Supply sufficient attenuation via the RF attenuator to provide an input level to the test receiver that is 40 dB below the test receiver maximum allowed input power when the transmitter is operating at its rated power level.
4. Unkey the transmitter.
5. Adjust the RF level of the signal generator to provide RF power into the RF power meter equal to the level this signal generator RF level shall be maintained throughout the rest of the measurement.
6. Connect the output of the RF combiner network to the input of the Modulation analyzer.
7. Set the horizontal sweep rate on the storage oscilloscope to 10 milliseconds per division and adjust the display to continuously view the 1 000 Hz tone. Adjust the vertical amplitude control of the oscilloscope to display the 1 000 Hz at  $\pm 4$  divisions vertically centered on the display.
8. Key the transmitter and observe the stored display. once the modulation Analyzer demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 kHz test signal is completely suppressed (including any capture time due to phasing) is considered to be  $t_{on}$ . The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ . See the figure in the appropriate standards section.
9. During the time from the end of  $t_2$  to the beginning of  $t_3$  the frequency difference should not exceed the limits set by the FCC in 47 CFR 90.214 and outlined in 3.2.2. The allowed limit is equal to the transmitter frequency times its FCC frequency tolerance times  $\pm 4$  display divisions divided by 12.5 kHz.
10. Key the transmitter and observe the stored display. The trace should be maintained within the allowed divisions after the end of  $t_2$  and remain within it until the end of the trace. See the figure in the appropriate standards sections.
11. To test the transient frequency behavior during the period  $t_3$  the transmitter shall be keyed.

12. Adjust the oscilloscope trigger controls so it will trigger on a decreasing magnitude from the Modulation analyzer, at 1 division from the right side of the display, when the transmitter is turned off. Set the controls to store the display. The moment when the 1 kHz test signal starts to rise is considered to provide to  $t_{off}$ .
13. The transmitter shall be unkeyed.
14. Observe the display. The trace should remain within the allowed divisions during period  $t_3$ . See the figures in the appropriate standards section.

### Limit

According to FCC 90.214, Transmitters designed to operate in the 150 ~ 174 MHz and 421 ~ 512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

the time intervals indicated.

| Time intervals <sup>1, 2</sup>                                                      | Maximum frequency difference <sup>3</sup> | All equipment  |                |
|-------------------------------------------------------------------------------------|-------------------------------------------|----------------|----------------|
|                                                                                     |                                           | 150 to 174 MHz | 421 to 512 MHz |
| Transient frequency behaviour for equipment designed to operate on 25 kHz channel   |                                           |                |                |
| t1 <sup>4</sup> -----                                                               | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| t2 -----                                                                            | ±12.5 kHz                                 | 20.0 ms        | 25.0 ms        |
| t3 <sup>4</sup> -----                                                               | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channel |                                           |                |                |
| t1 <sup>4</sup> -----                                                               | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| t2 -----                                                                            | ±6.25 kHz                                 | 20.0 ms        | 25.0 ms        |
| t3 <sup>4</sup> -----                                                               | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behaviour for Equipment Designed to Operate on 6.25 kHz Channel |                                           |                |                |
| t1 <sup>4</sup> -----                                                               | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |
| t2 -----                                                                            | ±3.125 kHz                                | 20.0 ms        | 25.0 ms        |
| t3 <sup>4</sup> -----                                                               | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |

<sup>1</sup>  $t_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

$t_1$  is the time period immediately following  $t_{on}$ .

$t_2$  is the time period immediately following  $t_1$ .

$t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .

$t_{off}$  is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in §90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time may exceed the maximum frequency difference for this period.

## RSS-119 5.9

When a transmitter is turned on, the radio frequency may take some time to stabilize. During this initial period, the frequency error or frequency difference (i.e. between the instantaneous and the steady state frequencies) shall not exceed the limits specified in Table 18.

Any suitable method of measurement can be used provided that it is fully described in the test report. A suitable and recommended method is given in TIA Standard 603.

Table 18 - Transient Frequency Behavior

| Channel Spacing<br>(kHz) | Time Intervals <sup>1,2</sup> | Maximum<br>Frequency difference<br>(kHz) | Transient Duration limit (ms) |                 |
|--------------------------|-------------------------------|------------------------------------------|-------------------------------|-----------------|
|                          |                               |                                          | 138 ~ 174 MHz                 | 406.1 ~ 512 MHz |
| 25                       | t <sub>1</sub>                | ±25                                      | 5                             | 10              |
|                          | t <sub>2</sub>                | ±12.5                                    | 20                            | 25              |
|                          | t <sub>3</sub>                | ±25                                      | 5                             | 10              |
| 12.5                     | t <sub>1</sub>                | ±25                                      | 5                             | 10              |
|                          | t <sub>2</sub>                | ±12.5                                    | 20                            | 25              |
|                          | t <sub>3</sub>                | ±25                                      | 5                             | 10              |
| 6.25                     | t <sub>1</sub>                | ±25                                      | 5                             | 10              |
|                          | t <sub>2</sub>                | ±12.5                                    | 20                            | 25              |
|                          | t <sub>3</sub>                | ±25                                      | 5                             | 10              |

<sup>1</sup> t<sub>on</sub>: the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t<sub>1</sub>: the time period immediately following t<sub>on</sub>.



t<sub>2</sub>: the time period immediately following t<sub>1</sub>.

t<sub>3</sub>: the time period from the instant when the transmitter is turned off until t<sub>off</sub>.

t<sub>off</sub>: the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> If the transmitter carrier output power rating is 6 W or less, the frequency difference during the time periods t<sub>1</sub> and t<sub>3</sub> may exceed the maximum frequency difference for these time periods. The corresponding plot of frequency versus time during t<sub>1</sub> and t<sub>3</sub> shall be recorded in the test report.

## Test results

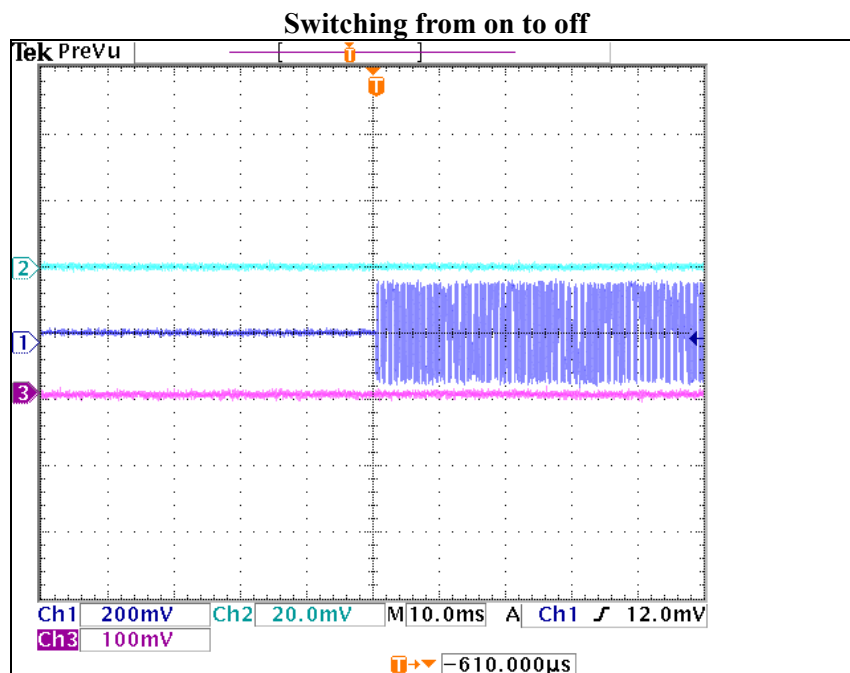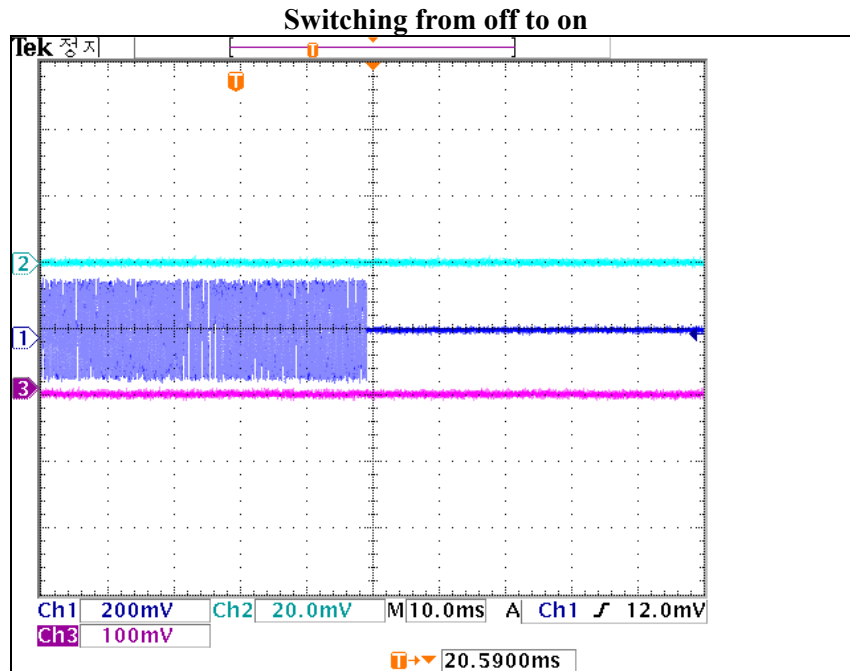


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


### 3.7 Radiation spurious emissions

#### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

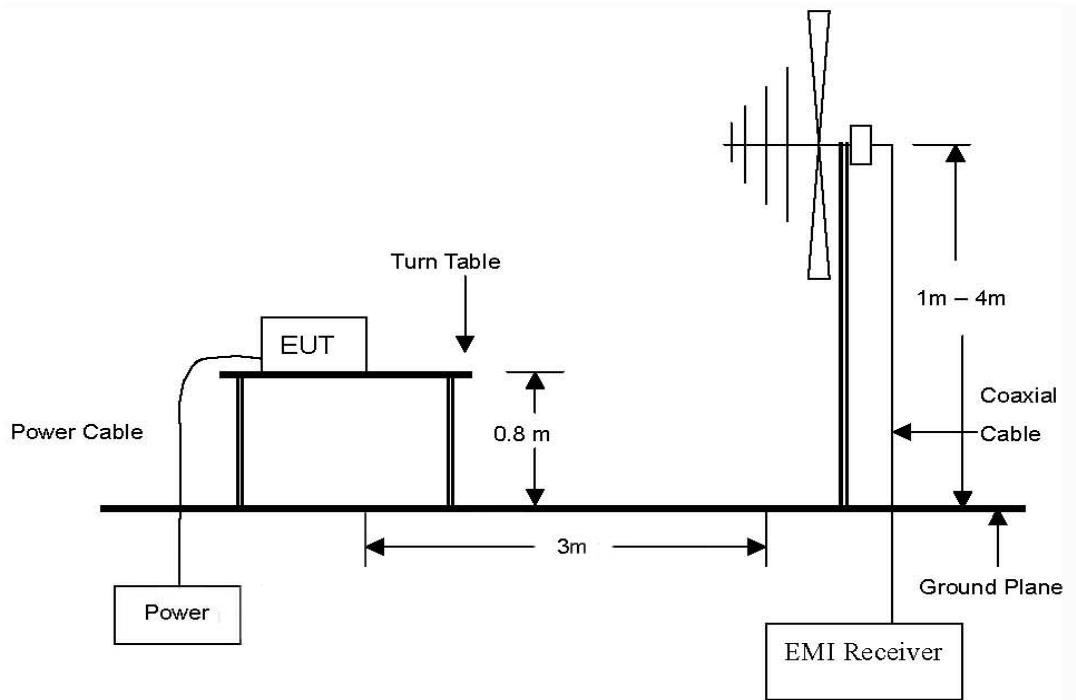

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 5 GHz Emissions.

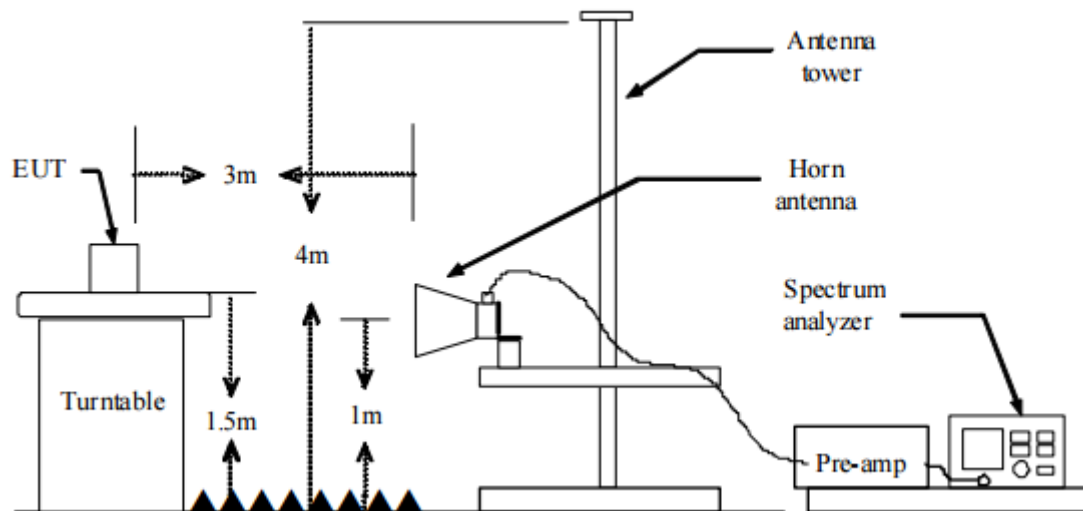

The diagram below shows the test setup for substituted method

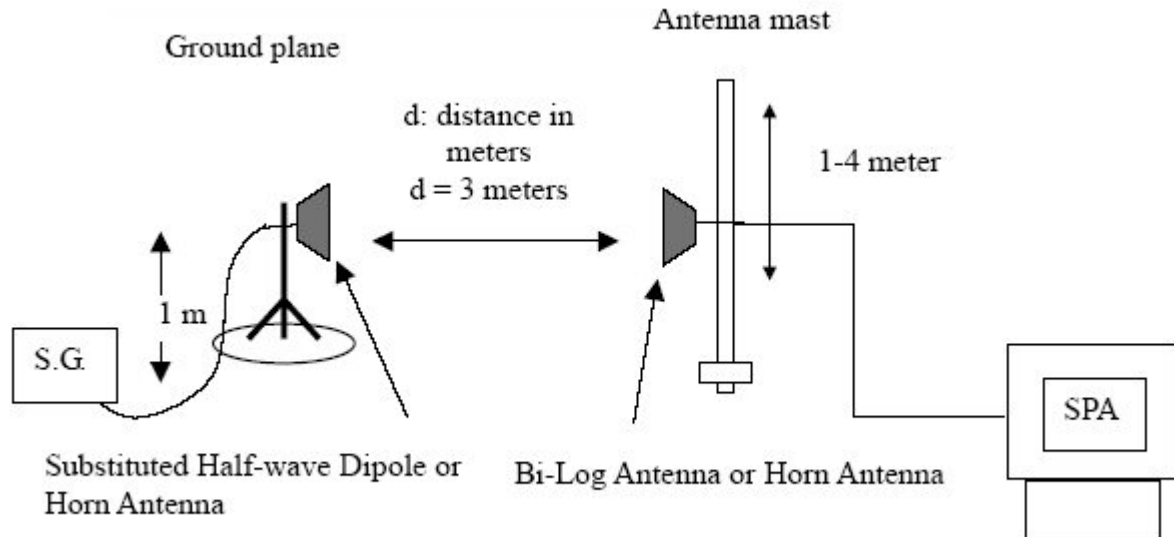

---

**Test procedure: Based on ANSI/TIA 603E: 2016**

1. On a test site, the EUT shall be placed at 80 cm height(below 1 000 MHz) or 1.5 m(above 1 000 MHz) on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using
  - 1) RBW : 100 kHz(< 1 GHz), 1 MHz(> 1 GHz).
  - 2) VBW : 100 kHz(< 1 GHz), 1 MHz(> 1 GHz).
5. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
7. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole(below 1 000 MHz) or horn antenna(above 1 000 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

**Limit**

According to §90.210(d), Spurious attenuated in dB = 50 + 10log(Power output in watts)



## Test results

### Measurement Condition

Ambient temperature : 20 °C

Relative humidity : 39 % R.H.

### Fundamental output power

| Frequency (MHz) | Ant. Pol.(H/V) | Output power(dBm) | Output power(W) |
|-----------------|----------------|-------------------|-----------------|
| 450.3250        | H              | 20.40             | 0.109648        |
|                 | V              | 17.35             | 0.054325        |
| 457.5750        | H              | 20.22             | 0.105196        |
|                 | V              | 17.43             | 0.055335        |
| 469.9875        | H              | 20.39             | 0.109396        |
|                 | V              | 17.03             | 0.050466        |

### Low channel

| Frequency (MHz) | Ant. Pol. (H/V) | S.G. Level (dBm) | Correction factor (dB) | Absolute level (dBm) | Spurious attenuation (dBc) | Limit (dBc) | Margin (dB) |
|-----------------|-----------------|------------------|------------------------|----------------------|----------------------------|-------------|-------------|
| 900.6500        | H               | -37.50           | 1.10                   | -36.40               | 56.80                      | 40.40       | 16.40       |
| 900.6500        | V               | -39.40           | 0.77                   | -38.63               | 59.03                      | 40.40       | 18.63       |
| 1350.9750       | H               | -42.40           | 3.88                   | -38.12               | 58.52                      | 40.40       | 18.12       |
| 1350.9750       | V               | -47.20           | 4.11                   | -42.89               | 63.29                      | 40.40       | 22.89       |
| 1801.3000       | H               | -42.80           | 4.49                   | -37.51               | 57.91                      | 40.40       | 17.51       |
| 1801.3000       | V               | -46.90           | 4.00                   | -42.00               | 62.40                      | 40.40       | 22.00       |
| 2251.6250       | H               | -42.70           | 4.18                   | -37.82               | 58.22                      | 40.40       | 17.82       |
| 2251.6250       | V               | -43.50           | 4.18                   | -38.82               | 59.22                      | 40.40       | 18.82       |
| 2701.9500       | H               | -50.30           | 4.21                   | -45.79               | 66.19                      | 40.40       | 25.79       |
| 2701.9500       | V               | -51.10           | 4.44                   | -46.56               | 66.96                      | 40.40       | 26.56       |
| 3152.2750       | H               | -60.20           | 4.19                   | -55.81               | 76.21                      | 40.40       | 35.81       |
| 3152.2750       | V               | -52.50           | 4.59                   | -47.41               | 67.81                      | 40.40       | 27.41       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-20T0030  
Page (29 ) of (32)

**Middle channel**

| Frequency<br>(MHz) | Ant. Pol.<br>(H/V) | S.G. Level<br>(dBm) | Correction factor<br>(dB) | Absolute level<br>(dBm) | Spurious attenuation<br>(dBc) | Limit<br>(dBc) | Margin<br>(dB) |
|--------------------|--------------------|---------------------|---------------------------|-------------------------|-------------------------------|----------------|----------------|
| 915.1500           | H                  | -37.30              | 0.42                      | -36.88                  | 57.10                         | 40.22          | 16.88          |
| 915.1500           | V                  | -39.20              | 0.86                      | -38.34                  | 58.56                         | 40.22          | 18.34          |
| 1372.7250          | H                  | -50.30              | 12.24                     | -38.06                  | 58.28                         | 40.22          | 18.06          |
| 1372.7250          | V                  | -53.20              | 12.54                     | -40.66                  | 60.88                         | 40.22          | 20.66          |
| 1830.3000          | H                  | -50.20              | 13.25                     | -36.95                  | 57.17                         | 40.22          | 16.95          |
| 1830.3000          | V                  | -49.20              | 13.30                     | -35.90                  | 56.12                         | 40.22          | 15.90          |
| 2287.8750          | H                  | -50.30              | 13.59                     | -36.71                  | 56.93                         | 40.22          | 16.71          |
| 2287.8750          | V                  | -47.60              | 13.25                     | -34.35                  | 54.57                         | 40.22          | 14.35          |
| 2745.4500          | H                  | -50.40              | 13.22                     | -37.18                  | 57.40                         | 40.22          | 17.18          |
| 2745.4500          | V                  | -51.50              | 13.32                     | -38.18                  | 58.40                         | 40.22          | 18.18          |
| 3203.0250          | H                  | -56.20              | 13.49                     | -42.71                  | 62.93                         | 40.22          | 22.71          |
| 3203.0250          | V                  | -54.90              | 13.57                     | -41.33                  | 61.55                         | 40.22          | 21.33          |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-20T0030  
Page (30 ) of (32)

**High channel**

| Frequency<br>(MHz) | Ant. Pol.<br>(H/V) | S.G. Level<br>(dBm) | Correction factor<br>(dB) | Absolute level<br>(dBm) | Spurious attenuation<br>(dBc) | Limit<br>(dBc) | Margin<br>(dB) |
|--------------------|--------------------|---------------------|---------------------------|-------------------------|-------------------------------|----------------|----------------|
| 939.9750           | H                  | -38.60              | 1.11                      | -37.49                  | 57.88                         | 40.39          | 17.49          |
| 939.9750           | V                  | -39.80              | 0.73                      | -39.07                  | 59.46                         | 40.39          | 19.07          |
| 1409.9625          | H                  | -50.45              | 12.52                     | -37.93                  | 58.32                         | 40.39          | 17.93          |
| 1409.9625          | V                  | -53.36              | 13.14                     | -40.22                  | 60.61                         | 40.39          | 20.22          |
| 1879.9500          | H                  | -55.40              | 13.76                     | -41.64                  | 62.03                         | 40.39          | 21.64          |
| 1879.9500          | V                  | -58.60              | 13.92                     | -44.68                  | 65.07                         | 40.39          | 24.68          |
| 2349.9375          | H                  | -59.70              | 13.62                     | -46.08                  | 66.47                         | 40.39          | 26.08          |
| 2349.9375          | V                  | -62.20              | 13.30                     | -48.90                  | 69.29                         | 40.39          | 28.90          |
| 2819.9250          | H                  | -59.80              | 12.93                     | -46.87                  | 67.26                         | 40.39          | 26.87          |
| 2819.9250          | V                  | -64.20              | 13.85                     | -50.35                  | 70.74                         | 40.39          | 30.35          |
| 3289.9125          | H                  | -62.60              | 13.36                     | -49.24                  | 69.63                         | 40.39          | 29.24          |
| 3289.9125          | V                  | -65.50              | 13.95                     | -51.55                  | 71.94                         | 40.39          | 31.55          |

**※ Remark;**

1. Correction factor: Substitution antenna gain - Tx cable loss
2. E.R.P. or E.I.R.P = S.G. Level + correction factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Appendix A. Measurement equipment

| Equipment                           | Manufacturer  | Model           | Serial No. | Calibration interval | Calibration due. |
|-------------------------------------|---------------|-----------------|------------|----------------------|------------------|
| Spectrum Analyzer                   | R&S           | FSV30           | 101389     | 1 year               | 2021.01.15       |
| 8360B Series Swept Signal Generator | HP            | 83630B          | 3844A00786 | 1 year               | 2021.01.15       |
| Vector Signal Generator             | R&S           | SMBV100A        | 256397     | 1 year               | 2020.06.25       |
| AC POWER SOURCE/ANALYZER            | HP            | 6813A           | 3729A00754 | 1 year               | 2021.01.15       |
| Attenuator                          | HP            | 30dB ATTENUATOR | 3318A05137 | 1 year               | 2021.01.15       |
| Modulation Analyzer                 | HP            | 8901B           | 3438A05094 | 1 year               | 2021.01.15       |
| Audio Analyzer                      | HP            | 8903B           | 3413A14728 | 1 year               | 2020.06.25       |
| Trilog-broadband antenna            | SCHWARZBECK   | VULB 9163       | 9168-714   | 2 years              | 2021.01.14       |
| Dipole antenna                      | SCHWARZBECK   | VHA9103         | 3093       | 2 years              | 2021.06.26       |
| Dipole antenna                      | SCHWARZBECK   | UHA9105         | 2703       | 2 years              | 2021.06.26       |
| Dipole antenna                      | SCHWARZBECK   | VHA9103         | 3101       | 2 years              | 2021.06.26       |
| Dipole antenna                      | SCHWARZBECK   | UHA9105         | 2702       | 2 years              | 2021.06.26       |
| Horn Antenna                        | A.H.          | SAS-571         | 781        | 2 years              | 2021.05.13       |
| Horn Antenna                        | A.H SYSTEMS   | SAS-571         | 414        | 2 years              | 2021.02.11       |
| High Pass Filter                    | Mini-Circuits | NHP-800+        | 15542      | 1 year               | 2020.06.24       |
| Preamplifier                        | AGILENT       | 8449B           | 3008A01742 | 1 year               | 2021.01.08       |
| Preamplifier                        | HP            | 8447F           | 2805A02570 | 1 year               | 2021.01.15       |
| Temperature & Humidity Chamber      | ESPEC         | SH-642          | 93012670   | 1 year               | 2021.01.15       |
| DIGITAL Oscilloscope                | Tektronix     | TDS3014B        | B014295    | 1 year               | 2020.09.10       |
| Four-port junction pad              | ANRITSU       | MA1612A         | M14368     | 1 year               | 2020.06.24       |

## Peripheral devices

| Device            | Manufacturer         | Model No. | Serial No.  |
|-------------------|----------------------|-----------|-------------|
| Notebook computer | LG Electronics Inc., | LG15N53   | NEZ65167208 |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr