
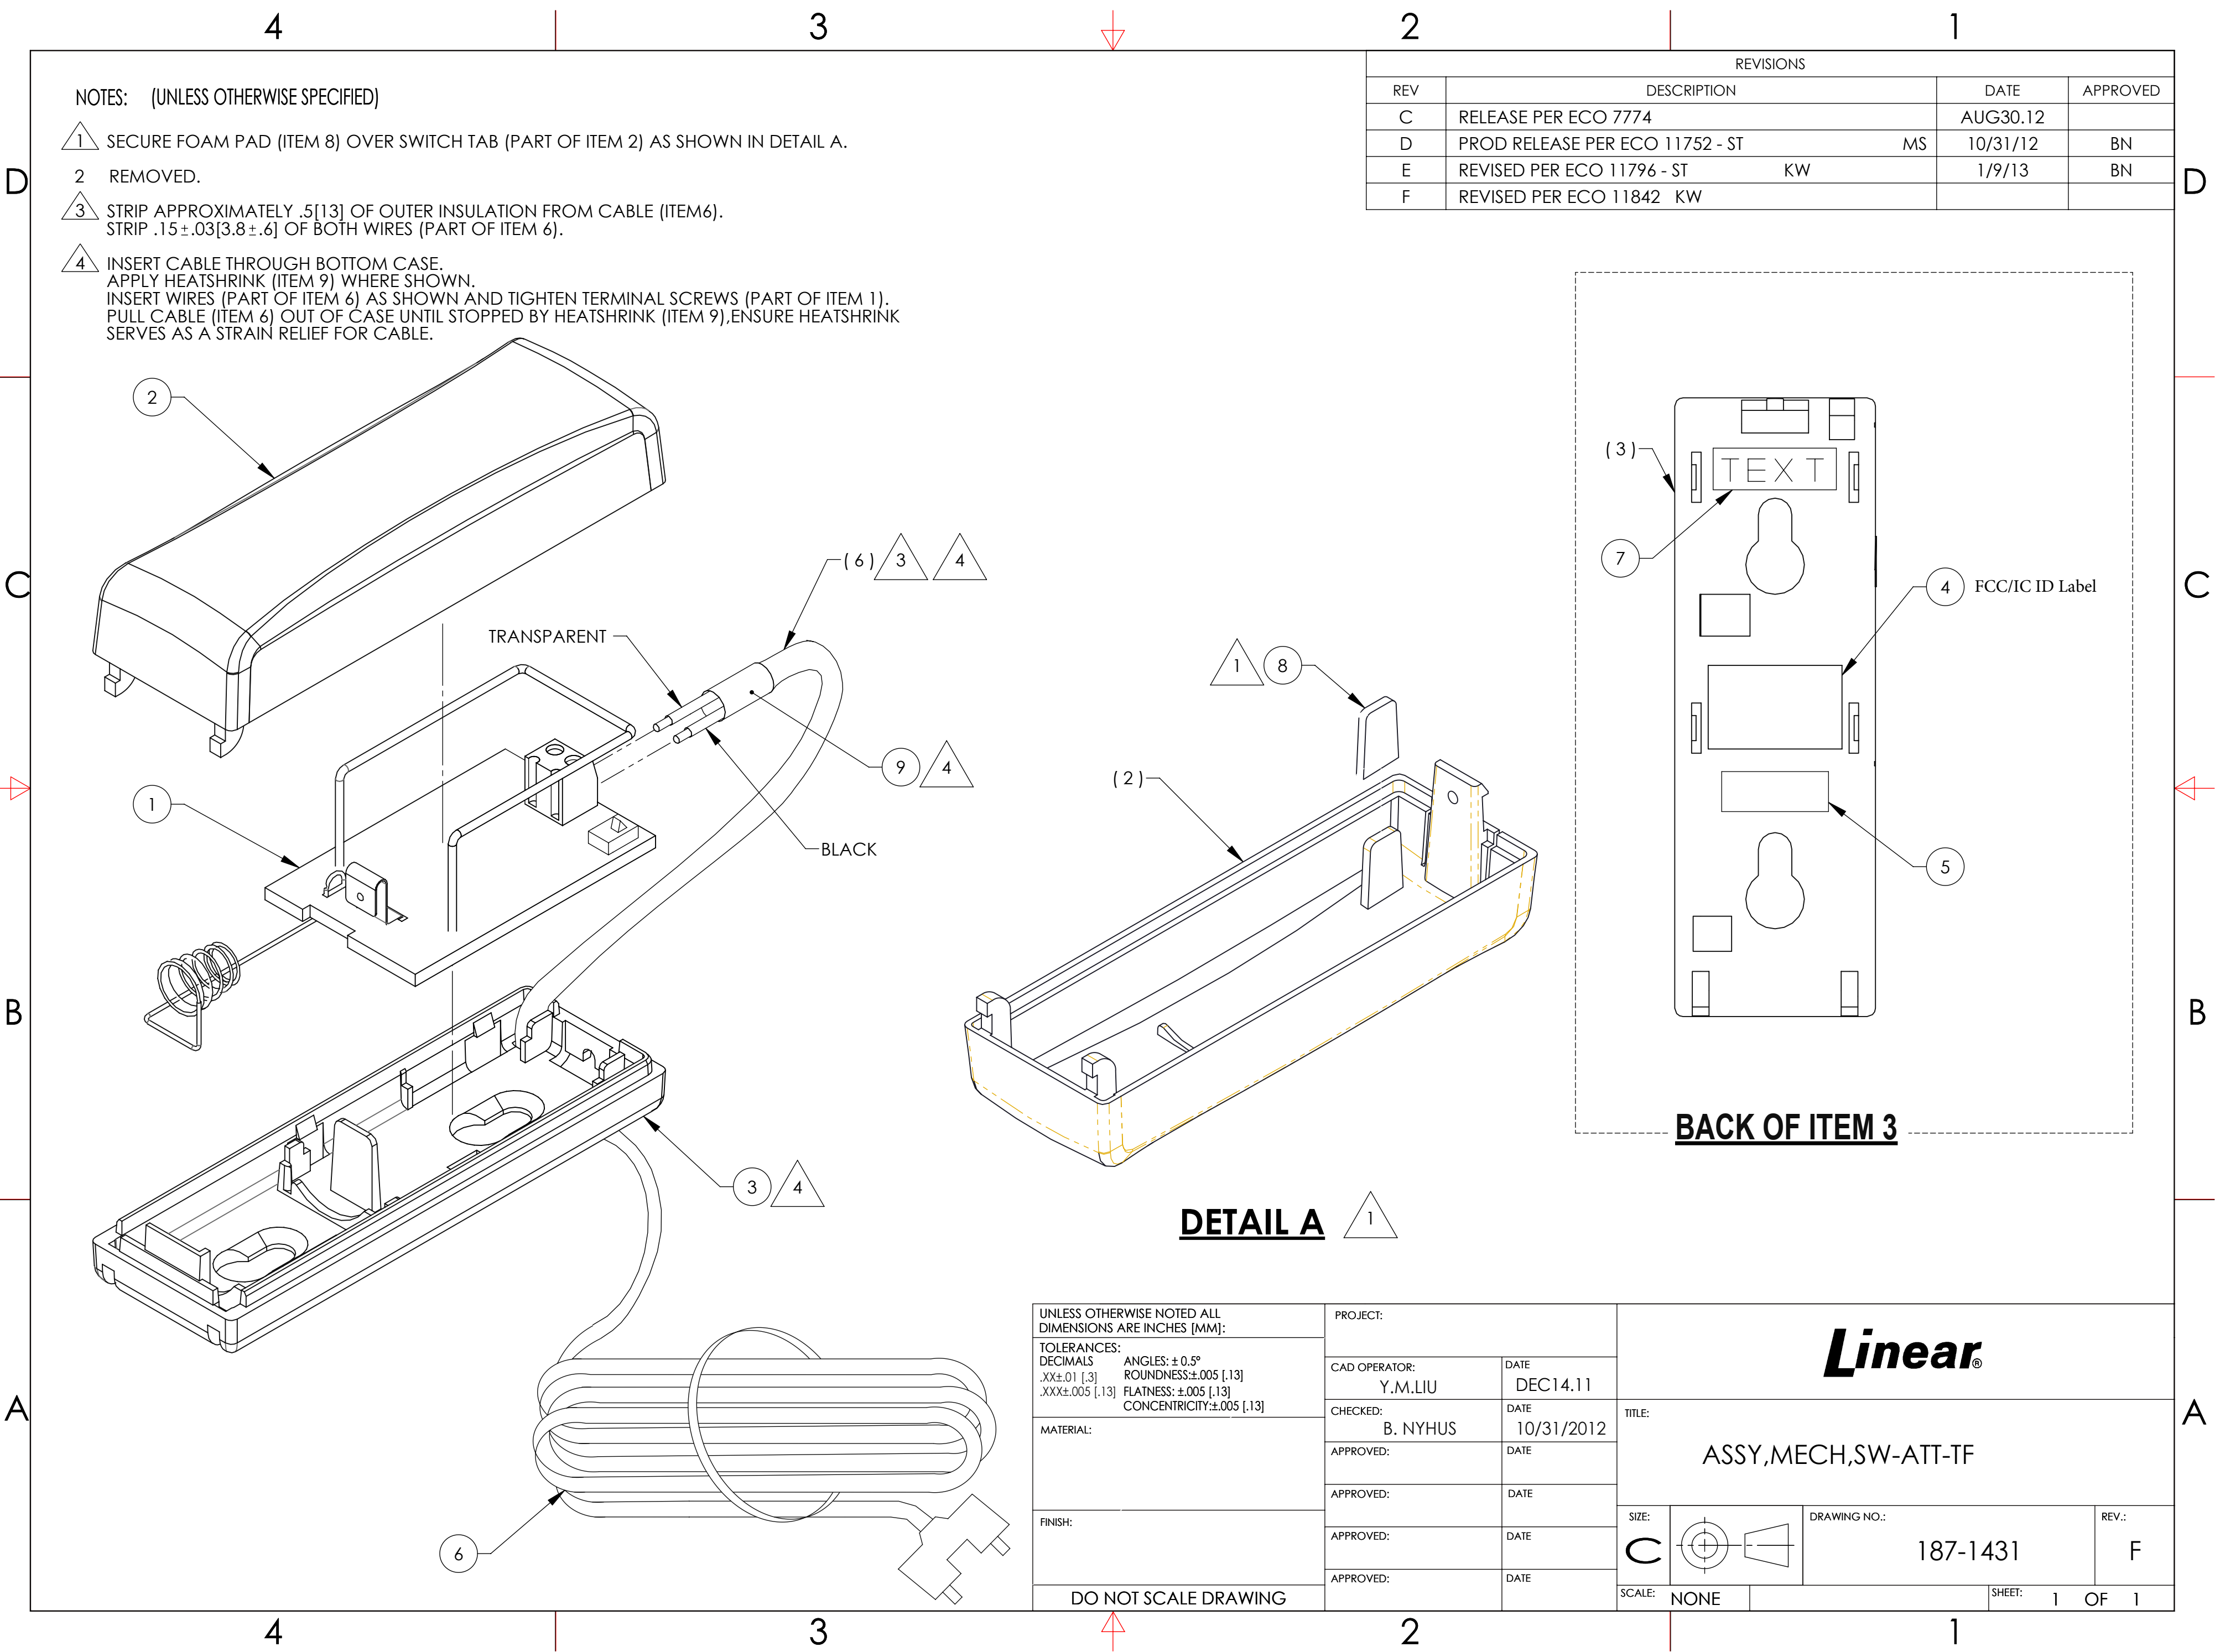




NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1 SECURE FOAM PAD (ITEM 8) OVER SWITCH TAB (PART OF ITEM 2) AS SHOWN IN DETAIL A.
- 2 REMOVED.
- 3 STRIP APPROXIMATELY .5[.13] OF OUTER INSULATION FROM CABLE (ITEM 6). STRIP .15±.03[3.8±.6] OF BOTH WIRES (PART OF ITEM 6).
- 4 INSERT CABLE THROUGH BOTTOM CASE. APPLY HEATSHRINK (ITEM 9) WHERE SHOWN. INSERT WIRES (PART OF ITEM 6) AS SHOWN AND TIGHTEN TERMINAL SCREWS (PART OF ITEM 1). PULL CABLE (ITEM 6) OUT OF CASE UNTIL STOPPED BY HEATSHRINK (ITEM 9). ENSURE HEATSHRINK SERVES AS A STRAIN RELIEF FOR CABLE.

REVISIONS				
REV	DESCRIPTION		DATE	APPROVED
C	RELEASE PER ECO 7774		AUG30.12	
D	PROD RELEASE PER ECO 11752 - ST	MS	10/31/12	BN
E	REVISED PER ECO 11796 - ST	KW	1/9/13	BN
F	REVISED PER ECO 11842 KW			

UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE INCHES [MM]:		PROJECT:		Linear®		
TOLERANCES: DECIMALS .XX±.01 [.3] .XXX±.005 [.13]		CAD OPERATOR: Y.M.LIU	DATE DEC14.11			
ANGLES: ± 0.5° ROUNDNESS:±.005 [.13] FLATNESS: ±.005 [.13] CONCENTRICITY:±.005 [.13]		CHECKED: B. NYHUS	DATE 10/31/2012	TITLE: ASSY,MECH,SW-ATT-TF		
		APPROVED:	DATE			
MATERIAL:		APPROVED:	DATE	SIZE: C 		
		APPROVED:	DATE			
FINISH:		APPROVED:	DATE	DRAWING NO.: 187-1431		REV.: F
		APPROVED:	DATE			
DO NOT SCALE DRAWING				SCALE: NONE		SHEET: 1 OF 1